



FCC 47 CFR PART 15 SUBPART E

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac, NFC & ANT

MODEL NUMBER: SM-N7505

FCC ID: A3LSMN7505

REPORT NUMBER: 13U16698-5

ISSUE DATE: JANUARY 9, 2014

Prepared for
SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY
GYEONGGI-DO, 443-742, SOUTH KOREA

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	1/9/14	Initial Issue	P. Kim

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	7
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	7
4.2. <i>SAMPLE CALCULATION</i>	7
4.3. <i>MEASUREMENT UNCERTAINTY</i>	7
5. EQUIPMENT UNDER TEST	8
5.1. <i>DESCRIPTION OF EUT</i>	8
5.2. <i>MAXIMUM OUTPUT POWER</i>	8
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	8
5.4. <i>WORST-CASE CONFIGURATION AND MODE</i>	9
5.5. <i>DESCRIPTION OF TEST SETUP</i>	10
6. TEST AND MEASUREMENT EQUIPMENT	12
7. SUMMARY TABLE	13
8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS	14
8.1. <i>ON TIME AND DUTY CYCLE RESULTS</i>	14
8.2. <i>DUTY CYCLE PLOTS</i>	14
9. MEASUREMENT METHOD	17
10. ANTENNA PORT TEST RESULTS	18
10.1. <i>26 dB BANDWIDTH</i>	18
10.1.1. 802.11a MODE IN THE 5.2 GHz BAND.....	18
10.1.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND.....	18
10.1.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND.....	18
10.1.4. 802.11ac HT80 MODE IN THE 5.2 GHz BAND.....	18
10.1.5. 802.11a MODE IN THE 5.3 GHz BAND.....	19
10.1.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND.....	19
10.1.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND.....	19
10.1.8. 802.11ac HT80 MODE IN THE 5.3 GHz BAND.....	19
10.1.9. 802.11a MODE IN THE 5.5 GHz BAND.....	19
10.1.10. 802.11n HT20 MODE IN THE 5.5 GHz BAND.....	20
10.1.11. 802.11n HT40 MODE IN THE 5.5 GHz BAND.....	20
10.1.12. 802.11ac HT80 MODE IN THE 5.5 GHz BAND.....	20
10.2. <i>99% BANDWIDTH</i>	28
10.2.1. 802.11a MODE IN THE 5.2 GHz BAND.....	28
10.2.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND.....	28
10.2.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND.....	28

10.2.4.	802.11ac HT80 MODE IN THE 5.2 GHz BAND	28
10.2.5.	802.11a MODE IN THE 5.3 GHz BAND.....	29
10.2.6.	802.11n HT20 MODE IN THE 5.3 GHz BAND	29
10.2.7.	802.11n HT40 MODE IN THE 5.3 GHz BAND	29
10.2.8.	802.11ac HT80 MODE IN THE 5.3 GHz BAND	29
10.2.9.	802.11a MODE IN THE 5.5 GHz BAND.....	29
10.2.10.	802.11n HT20 MODE IN THE 5.5 GHz BAND.....	29
10.2.11.	802.11n HT40 MODE IN THE 5.5 GHz BAND.....	30
10.2.12.	802.11ac HT80 MODE IN THE 5.5 GHz BAND	30
10.3.	<i>AVERAGE POWER</i>	37
10.3.1.	802.11a MODE IN THE 5.2 GHz BAND.....	37
10.3.2.	802.11n HT20 MODE IN THE 5.2 GHz BAND	37
10.3.3.	802.11n HT40 MODE IN THE 5.2 GHz BAND	37
10.3.4.	802.11ac HT80 MODE IN THE 5.2 GHz BAND	37
10.3.5.	802.11a MODE IN THE 5.3 GHz BAND.....	38
10.3.6.	802.11n HT20 MODE IN THE 5.3 GHz BAND.....	38
10.3.7.	802.11n HT40 MODE IN THE 5.3 GHz BAND.....	38
10.3.8.	802.11ac HT80 MODE IN THE 5.3 GHz BAND	38
10.3.9.	802.11a MODE IN THE 5.5 GHz BAND.....	38
10.3.10.	802.11n HT20 MODE IN THE 5.5 GHz BAND	39
10.3.11.	802.11n HT40 MODE IN THE 5.5 GHz BAND	39
10.3.12.	802.11ac HT80 MODE IN THE 5.5 GHz BAND	39
10.4.	<i>OUTPUT POWER AND PPSD</i>	40
10.4.1.	802.11a MODE IN THE 5.2 GHz BAND.....	41
10.4.2.	802.11n HT20 MODE IN THE 5.2 GHz BAND.....	42
10.4.3.	802.11n HT40 MODE IN THE 5.2 GHz BAND.....	43
10.4.4.	802.11ac HT80 MODE IN THE 5.2 GHz BAND	44
10.4.5.	802.11a MODE IN THE 5.3 GHz BAND.....	45
10.4.6.	802.11n HT20 MODE IN THE 5.3 GHz BAND	46
10.4.7.	802.11n HT40 MODE IN THE 5.3 GHz BAND	47
10.4.8.	802.11ac HT80 MODE IN THE 5.3 GHz BAND	48
10.4.9.	802.11a MODE IN THE 5.5 GHz BAND.....	49
10.4.10.	802.11n HT20 MODE IN THE 5.5 GHz BAND.....	50
10.4.11.	802.11n HT40 MODE IN THE 5.5 GHz BAND.....	51
10.4.12.	802.11ac HT80 MODE IN THE 5.5 GHz BAND	52
10.5.	<i>PEAK EXCURSION</i>	59
10.5.1.	802.11a MODE IN THE 5.2 GHz BAND.....	59
10.5.1.	802.11n HT20 MODE IN THE 5.2 GHz BAND	60
10.5.1.	802.11n HT40 MODE IN THE 5.2 GHz BAND	61
10.5.1.	802.11ac HT80 MODE IN THE 5.2 GHz BAND	62
11.	TRANSMITTER ABOVE 1 GHz	63
11.1.	<i>5.2 GHz</i>	64
11.1.1.	TX ABOVE 1 GHz 802.11a MODE IN THE 5.2 GHz BAND.....	64
11.1.2.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.2 GHz BAND.....	74
11.1.3.	TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.2 GHz BAND.....	85
11.1.4.	TX ABOVE 1 GHz 802.11ac HT80 MODE IN THE 5.2 GHz BAND	94
11.2.	<i>5.3 GHz</i>	99
11.2.1.	TX ABOVE 1 GHz 802.11a MODE IN THE 5.3 GHz BAND.....	99
11.2.3.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.3 GHz BAND.....	110
11.2.5.	TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.3 GHz BAND.....	121

11.2.7.	TX ABOVE 1 GHz 802.11ac HT80 MODE IN THE 5.3 GHz BAND	129
11.3.	5.5-5.6 GHz.....	134
11.3.1.	TX ABOVE 1 GHz 802.11a MODE IN THE 5.5 GHz BAND.....	134
11.3.3.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.5 GHz BAND.....	147
11.3.5.	TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.5 GHz BAND.....	159
11.3.7.	TX ABOVE 1 GHz 802.11ac HT80 MODE IN THE 5.5 GHz BAND.....	172
12.	WORST-CASE BELOW 1 GHz.....	182
13.	AC POWER LINE CONDUCTED EMISSIONS.....	185
14.	DYNAMIC FREQUENCY SELECTION.....	189
14.1.	OVERVIEW.....	189
14.1.1.	LIMITS.....	189
14.1.2.	TEST AND MEASUREMENT SYSTEM.....	192
14.1.3.	SETUP OF EUT	195
14.1.5.	DESCRIPTION OF EUT.....	196
14.2.	RESULTS FOR 20 MHz BANDWIDTH.....	198
14.2.1.	TEST CHANNEL	198
14.2.2.	RADAR WAVEFORM AND TRAFFIC.....	198
14.2.3.	OVERLAPPING CHANNEL TESTS.....	200
14.2.4.	MOVE AND CLOSING TIME	200
14.3.	RESULTS FOR 40 MHz BANDWIDTH.....	204
14.3.1.	TEST CHANNEL	204
14.3.2.	RADAR WAVEFORM AND TRAFFIC.....	204
14.3.3.	OVERLAPPING CHANNEL TESTS.....	206
14.3.4.	MOVE AND CLOSING TIME	206
14.3.5.	NON-OCCUPANCY PERIOD	210
15.	SETUP PHOTOS.....	211

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO, 443-742, SOUTH KOREA

EUT DESCRIPTION: GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac,
NFC & ANT

MODEL: SM-N7505

SERIAL NUMBER: R31DB1SV13P

DATE TESTED: DECEMBER 9, 2013 – January 9, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Tested By:



PHILIP KIM
WiSE PROGRAM MANAGER
UL Verification Services Inc.

ROLLY ALEGRE
Wise LAB TECHNICIAN
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 06-96, and ANSI C63.10-2009.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac, NFC & ANT.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5180-5240	802.11a	14.34	27.16
5180-5240	802.11n HT20	14.31	26.98
5190-5230	802.11n HT40	13.24	21.09
5210	802.11ac HT80	12.66	18.45
5260-5320	802.11a	14.62	28.97
5260-5320	802.11n HT20	14.44	27.80
5270-5310	802.11n HT40	13.5	22.39
5290	802.11ac HT80	12.81	19.10
5500-5700	802.11a	14.26	26.67
5500-5700	802.11n HT20	14.26	26.67
5510-5670	802.11n HT40	13.39	21.83
5530	802.11ac HT80	12.34	17.14

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of 2.08 dBi for 5.2G; 1.61dBi for 5.3G; 2.09dBi for 5.5G.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in the Y orientation.

Based on the baseline scan, the worst-case data rates were:

802.11a mode: 6 Mbps
802.11n HT20mode: MCS0
802.11n HT40mode: MCS0

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Samsung	SM-N7505	FK-383-A	N/A
Earphone	Samsung	Samsung	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1.0m	N/A

TEST SETUP

The EUT is setup as a stand-alone device.

SETUP DIAGRAM FOR TESTS

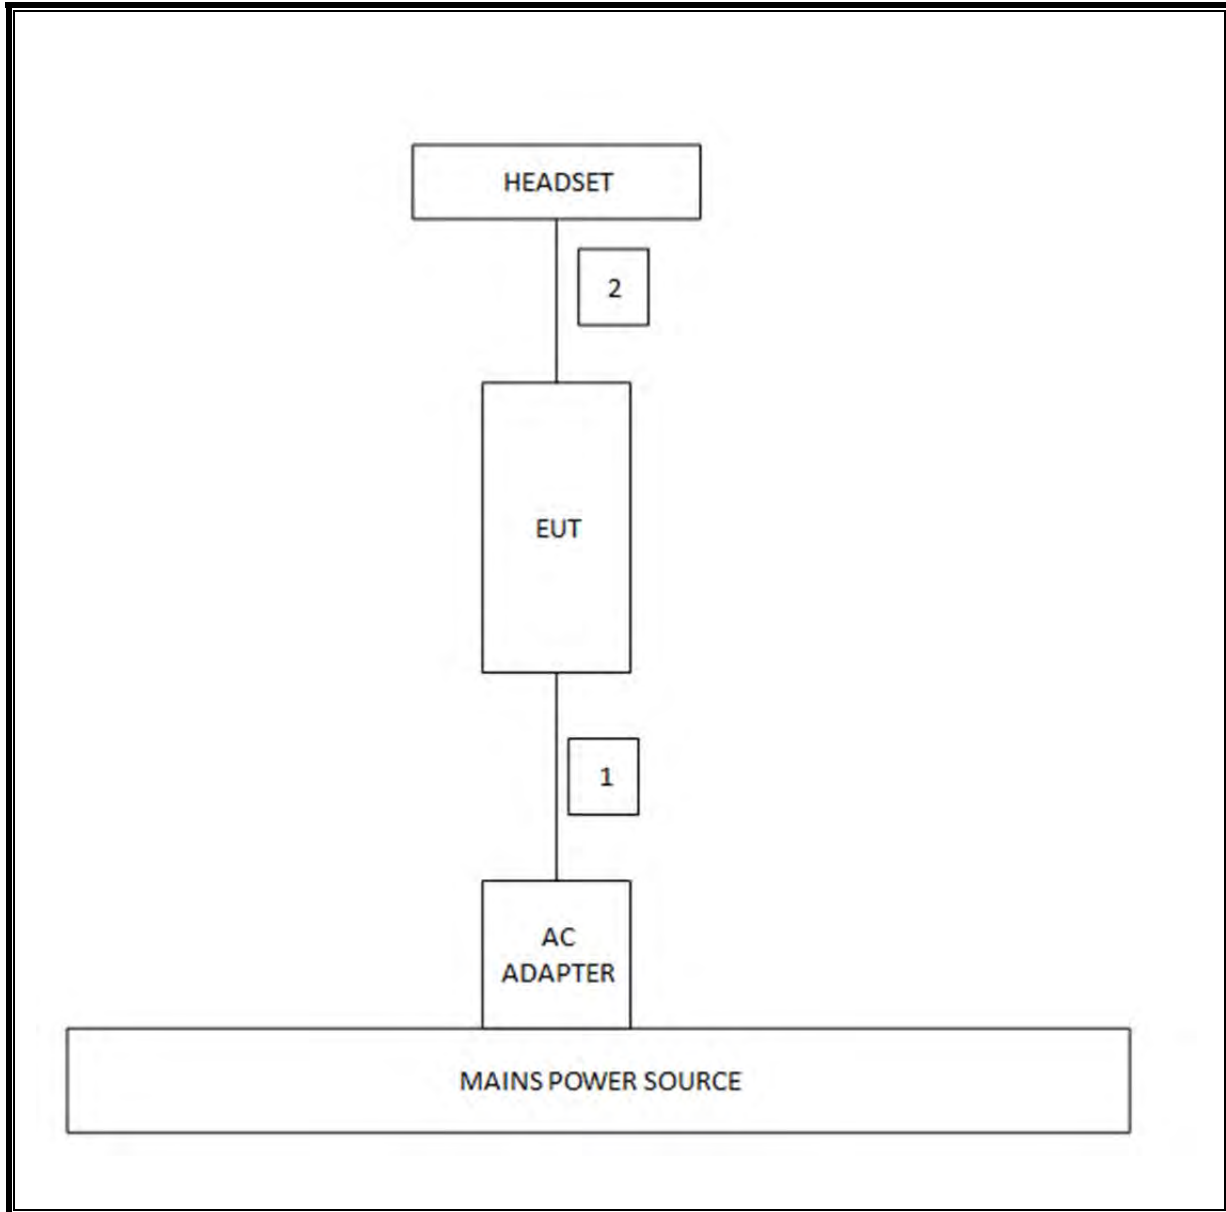

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C00986	4/1/2014
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01179	2/26/2014
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	8/8/2014
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	1/28/2014
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01063	10/22/2014
Preamplifier, 40 GHz	Miteq	NSP4000-SP2	C00990	8/2/2014
Antenna, Bilog, 30MHz-1 GHz	Sunol Sciences	JB1	N/A	3/6/2014
Antenna, Horn, 18 GHz	ETS	3117	C01022	2/21/2014
Antenna, Horn, 26.5 GHz	ARA	MVH-1826/B	C00589	12/17/2014
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/2014
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/2014
LISN, 30 MHz	FCC	50/250-25-2	C00626	01/14/14
Reject Filter, 5.725-5.825 GHz	Micro-Tronics	BRC13192	N02676	CNR

7. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result	Worst Case
15.247 (a)	Occupied Band width (26dB)	N/A	Conducted	Pass	82.5dBm
15.407 (a)(1)	TX Cond. Power 5.15-2.25	<17dBm or 4+10Log(OBW)		Pass	14.34dBm
15.407 (a)(2)	TX Cond. Power 5.25-5.35 & 5.47-5.725	<24dBm or 11+10Log(OBW)		Pass	14.62dBm
15.407 (a)(5)	PSD	<4dBm for 5.2G <11dBm for 5.3 5.5G		Pass	3.31dBm
15.407 (a)(6)	Peak Excursion Ratio	13dB		Pass	8.44dBm
15.207 (a)	AC Power Line conducted emissions	Section 10	Radiated	Pass	0.34dBuV/m(AV)
15.407 (b) & 15.209	Radiated Spurious Emission	< 54dBuV/m		Pass	45.759dBuV/m
15.407 (h)(2)	Dynamic Frequency Selection	N/A	Radiated / Condcuted	Pass	N/A

8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

LIMITS

None; for reporting purposes only.


PROCEDURE



KDB 789033 Zero-Span Spectrum Analyzer Method.


8.1. ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)
802.11a	1.42	1.53	0.932	93.2%	0.31	0.702
802.11n HT20	1.33	1	0.930	93.0%	0.31	0.750
802.11n HT40	0.66	1	0.867	86.7%	0.62	1.507
802.11ac HT80	0.33	0	0.760	76.0%	1.19	3.033

8.2. DUTY CYCLE PLOTS

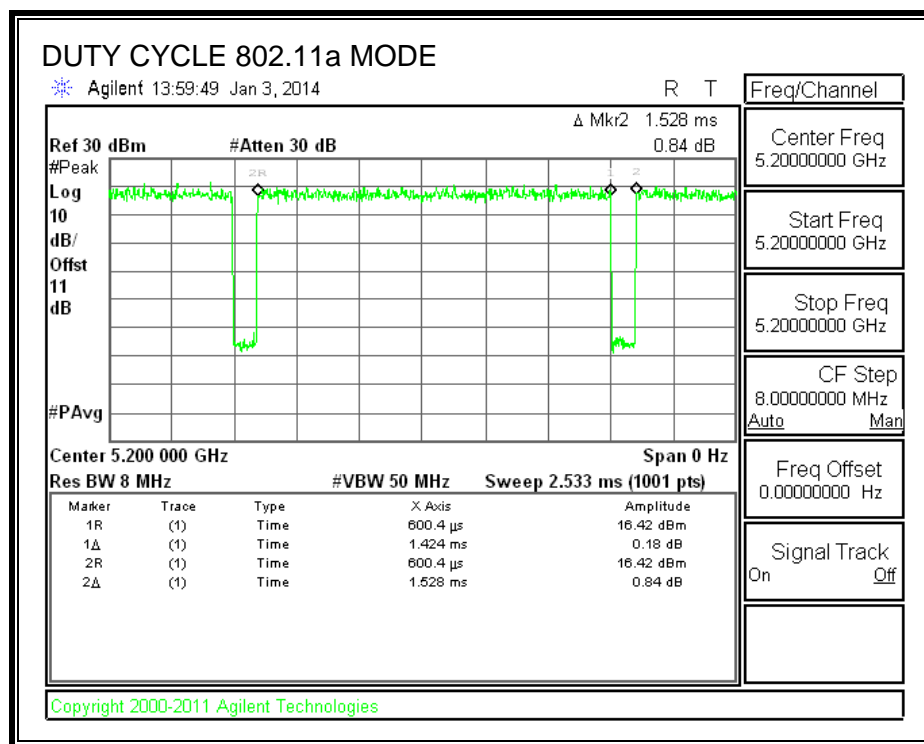

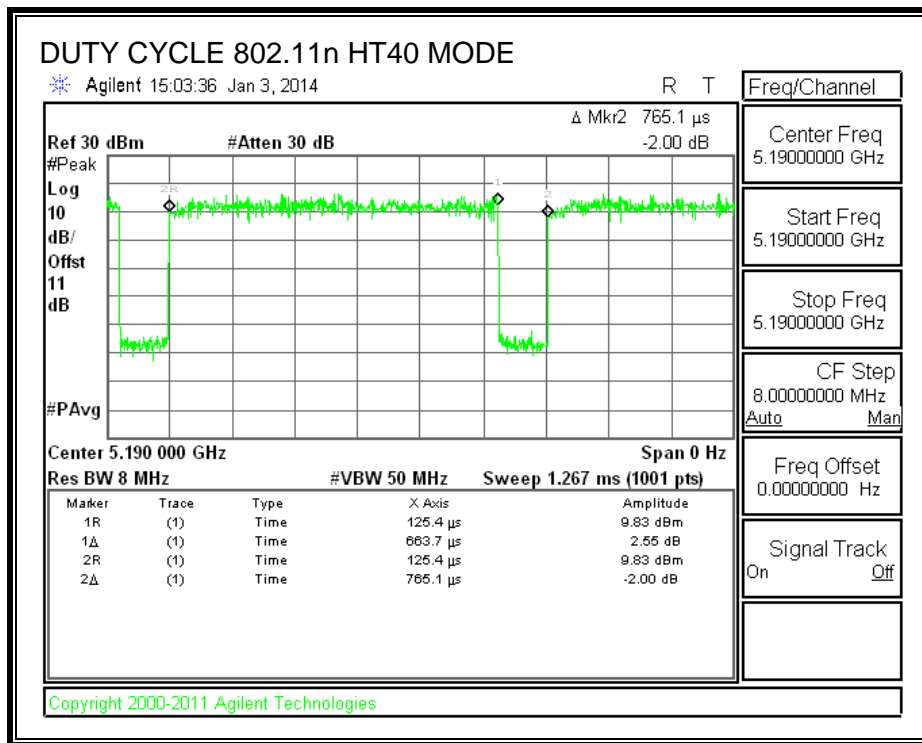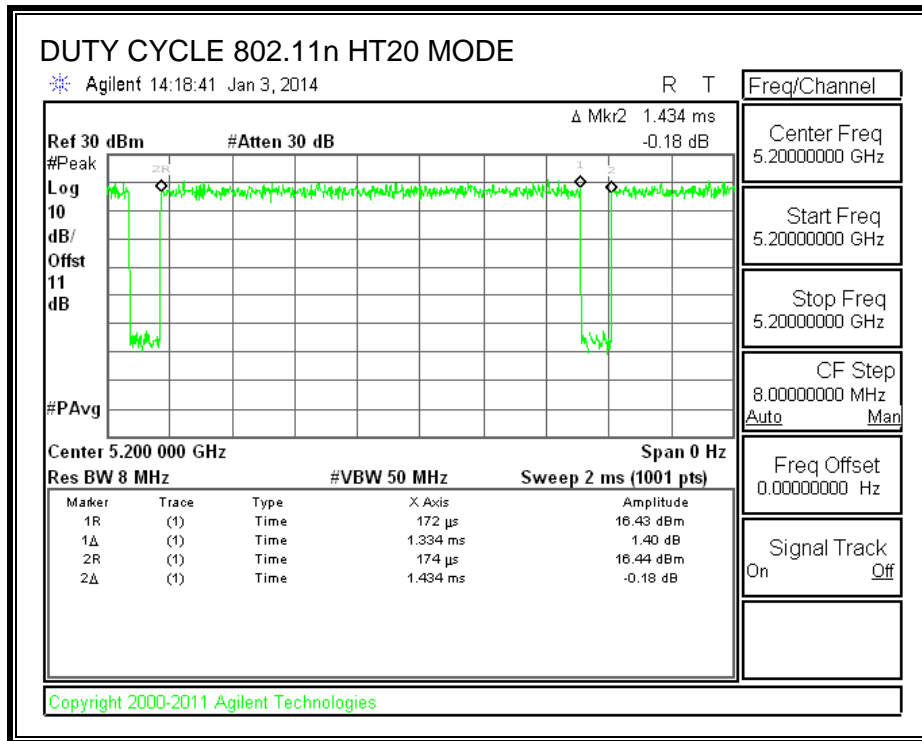

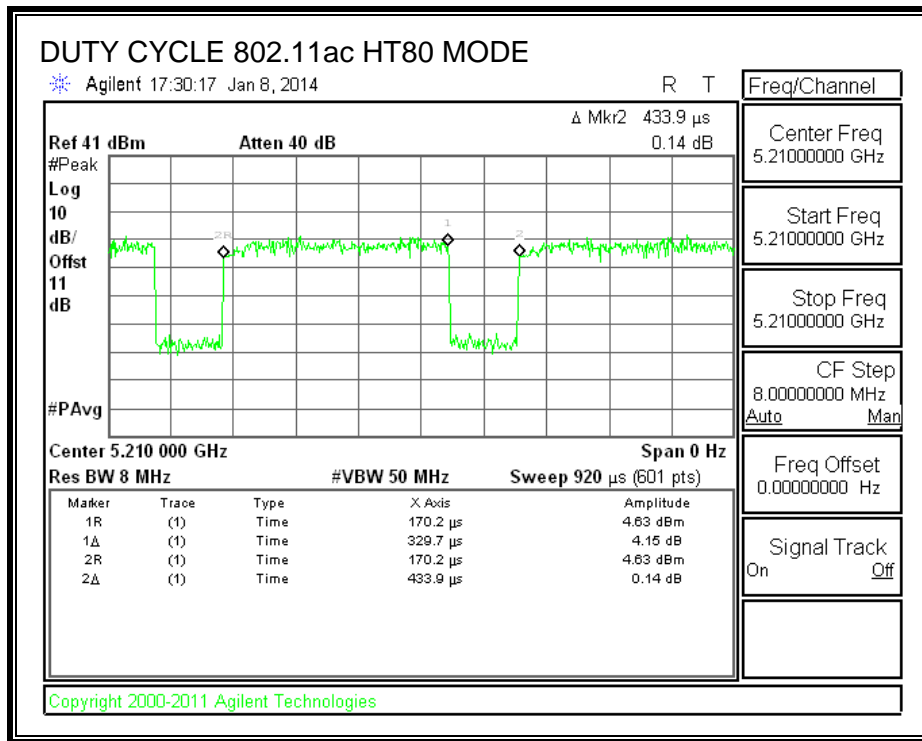

9. MEASUREMENT METHOD

The Duty Cycle is less than 98% and consistent therefore KDB 789033 Method SA-2 is used for power and PPSD

The Duty Cycle is less than 98% and consistent, KDB 789033 Method AD with Power RMS Averaging and duty cycle correction is used.

10. ANTENNA PORT TEST RESULTS

10.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

10.1.1. 802.11a MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	21.60
Mid	5200	21.60
High	5240	21.53
Worst		21.60

10.1.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	21.92
Mid	5200	21.88
High	5240	21.92
Worst		21.92

10.1.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	40.420
Mid	5230	40.420
Worst		40.420

10.1.4. 802.11ac HT80 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5210	81.600

10.1.5. 802.11a MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5260	21.50
Mid	5300	21.58
High	5320	21.58
Worst		21.58

10.1.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5260	21.79
Mid	5300	21.92
High	5320	22.00
Worst		22.00

10.1.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5270	40.1
High	5310	40.2
Worst		40.2

10.1.8. 802.11ac HT80 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5290	82.170

10.1.9. 802.11a MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5500	21.650
Mid	5580	21.380
High	5700	21.350
Worst		21.650

10.1.10. 802.11n HT20 MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5500	21.800
Mid	5580	21.800
High	5700	21.700
Worst		21.800


10.1.11. 802.11n HT40 MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5510	39.9
Mid	5550	40.2
High	5670	40.3
Worst		40.3


10.1.12. 802.11ac HT80 MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5530	82.500
Worst		82.5


802.11a 5.2G 26 dB BANDWIDTH

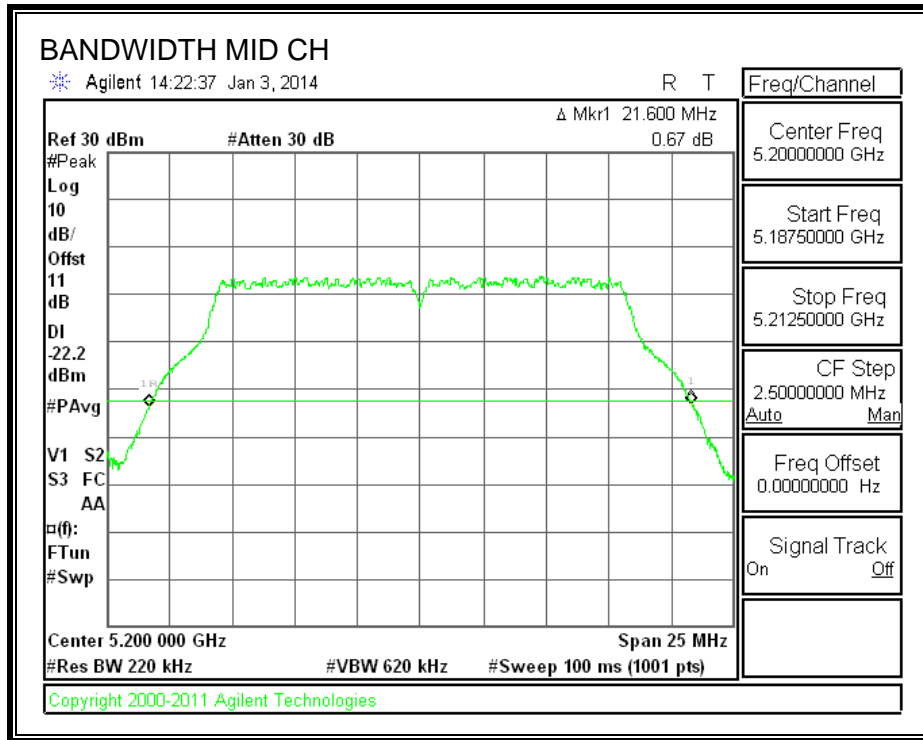


802.11n HT20 5.2G 26 dB BANDWIDTH

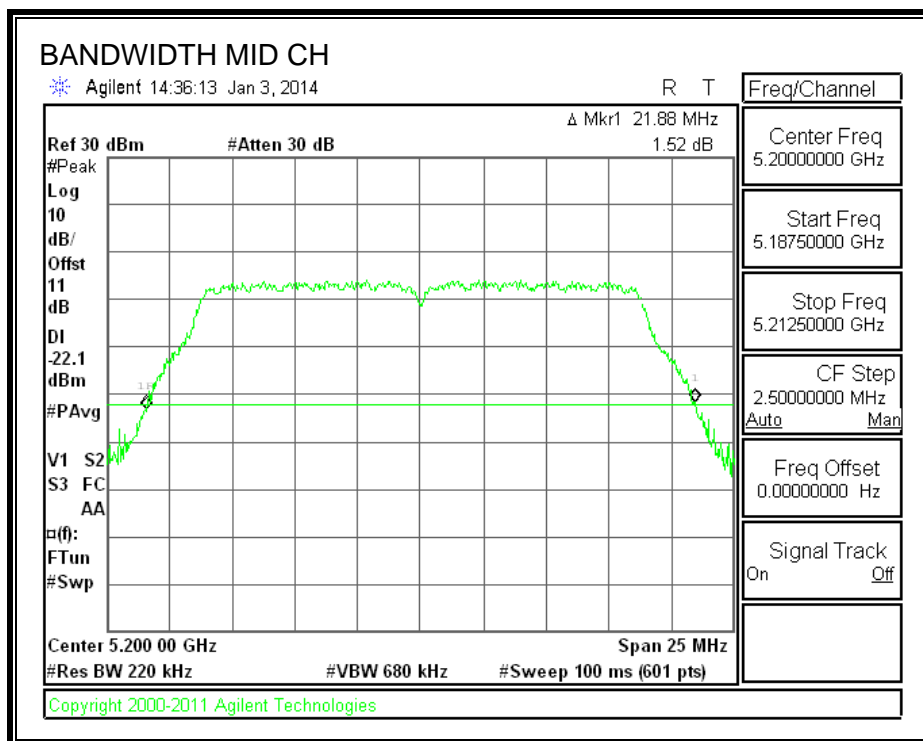


802.11n HT40 5.2G 26 dB BANDWIDTH

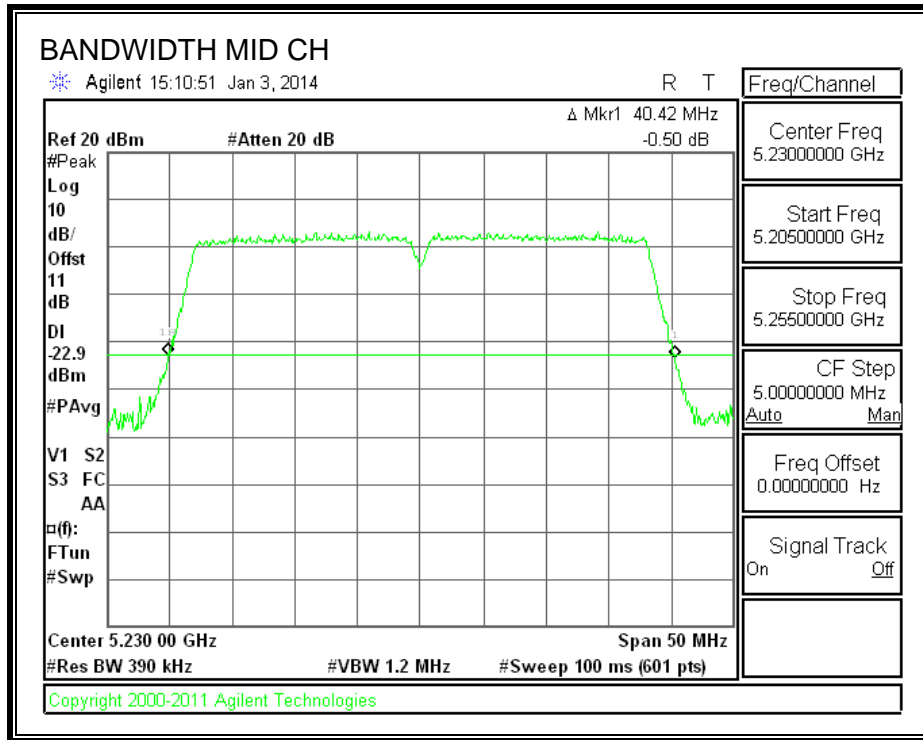


802.11ac HT80 5.2G 26 dB BANDWIDTH

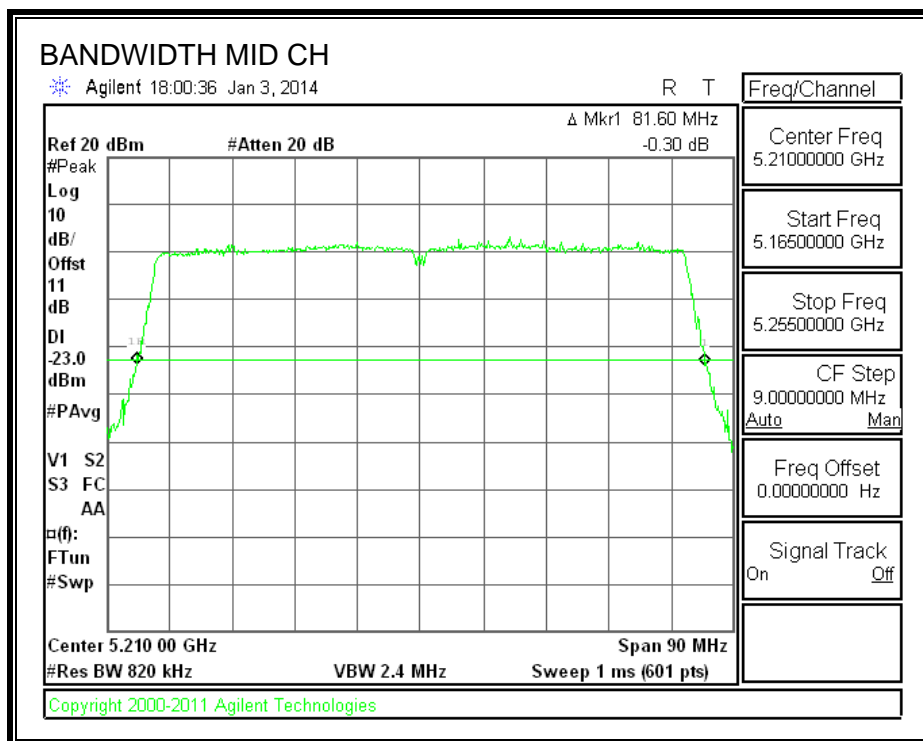


802.11a 5.3G 26 dB BANDWIDTH

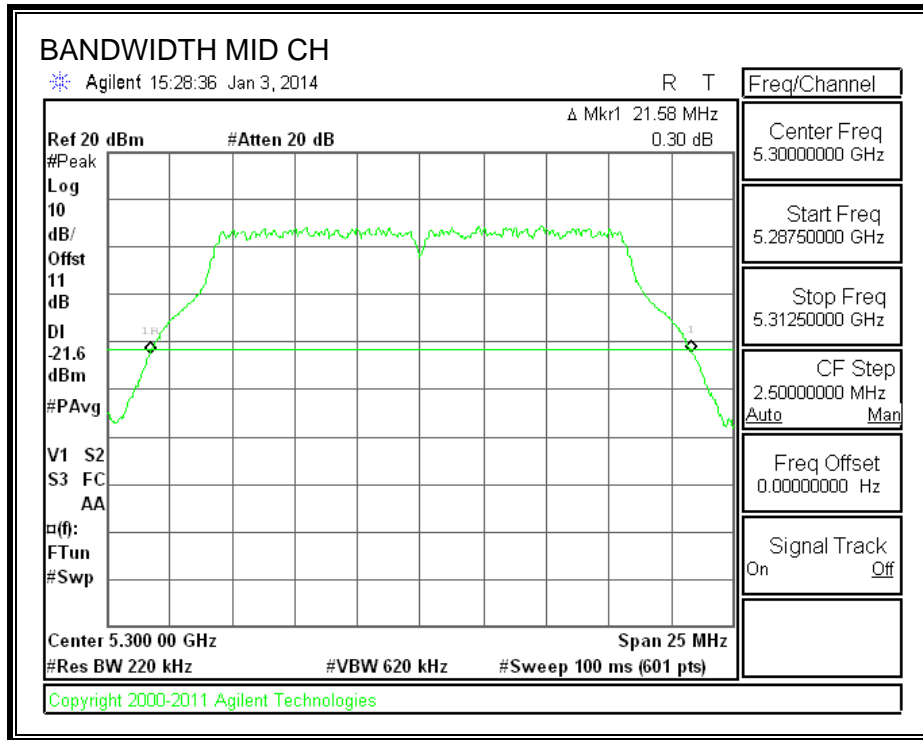


802.11n HT20 5.3G 26 dB BANDWIDTH

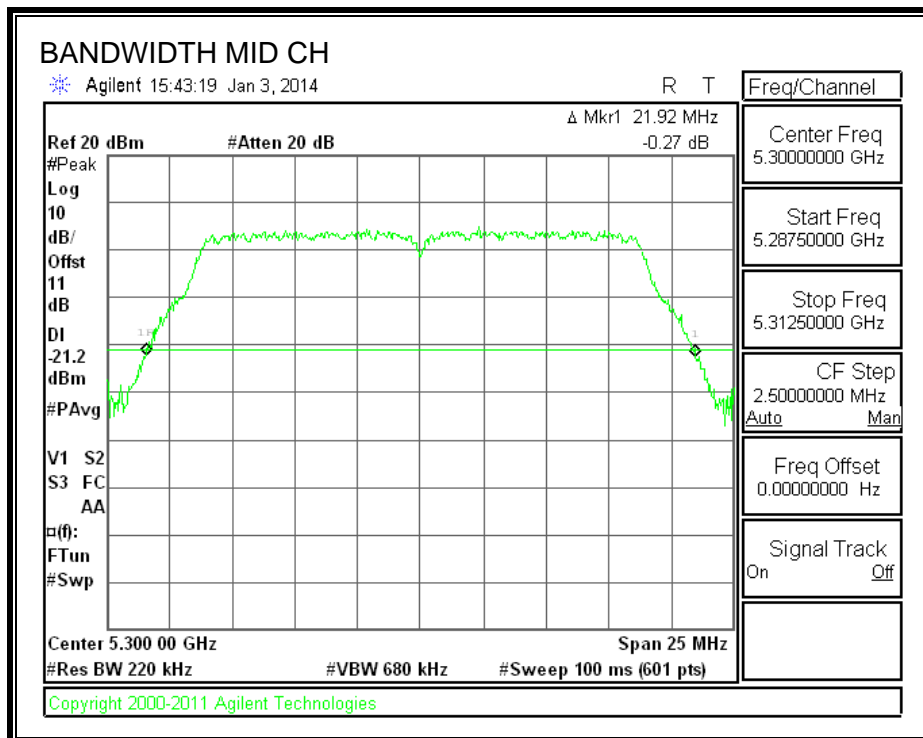


802.11n HT40 5.3G 26 dB BANDWIDTH

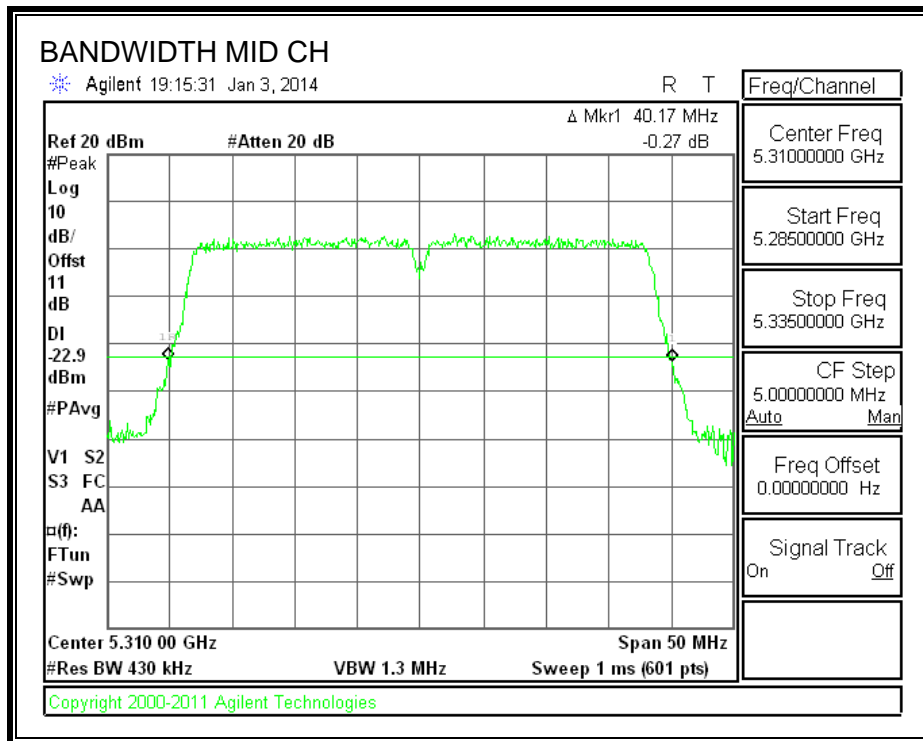


802.11ac HT80 5.3G 26 dB BANDWIDTH

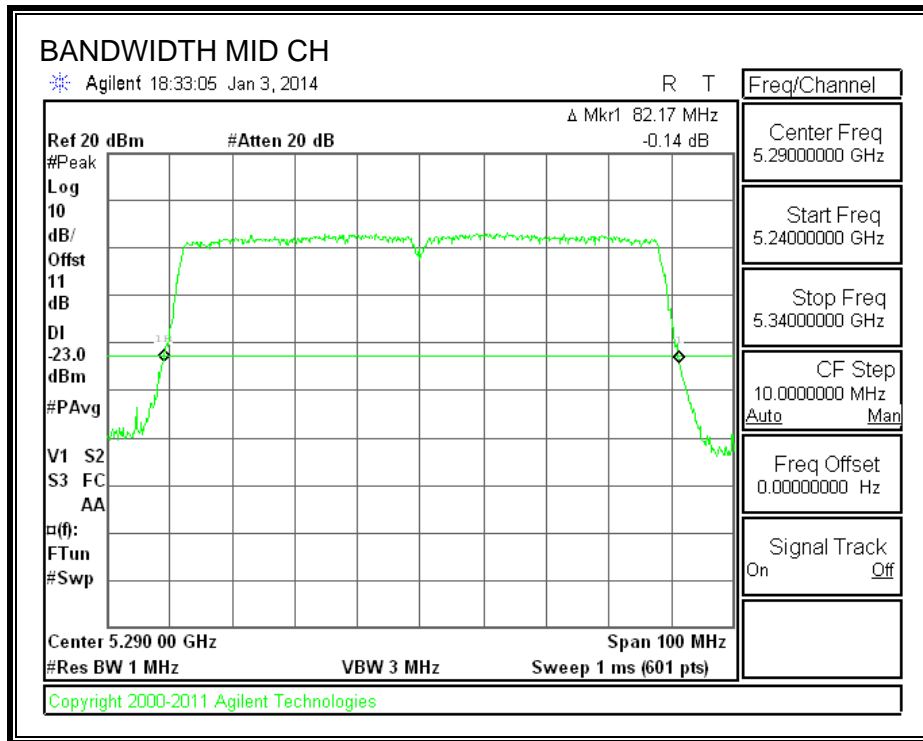


802.11a 5.5G 26 dB BANDWIDTH

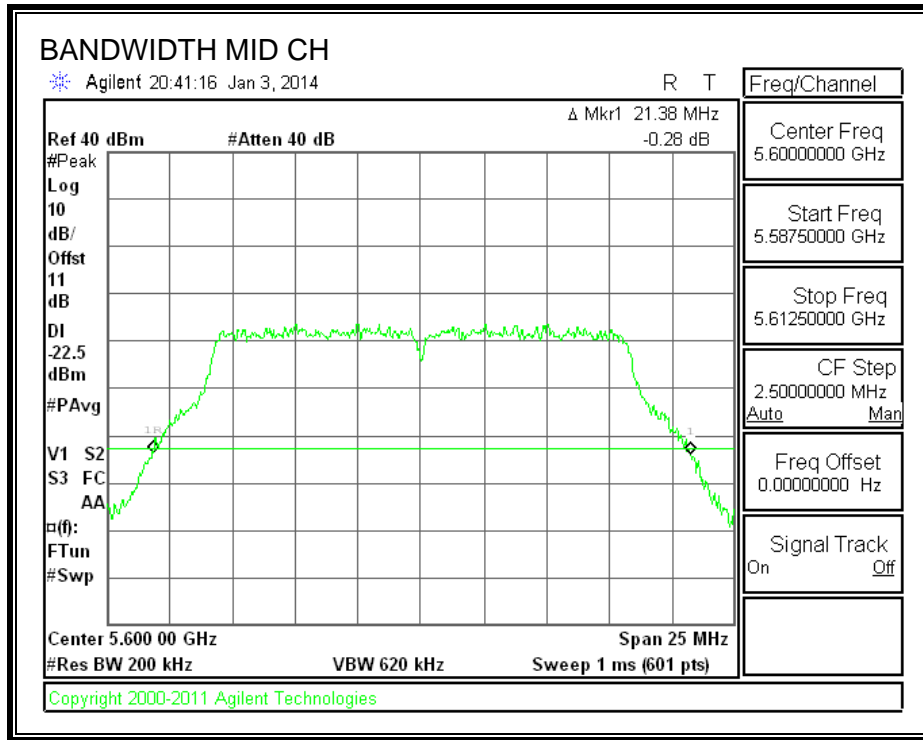


802.11n HT20 5.5G 26 dB BANDWIDTH

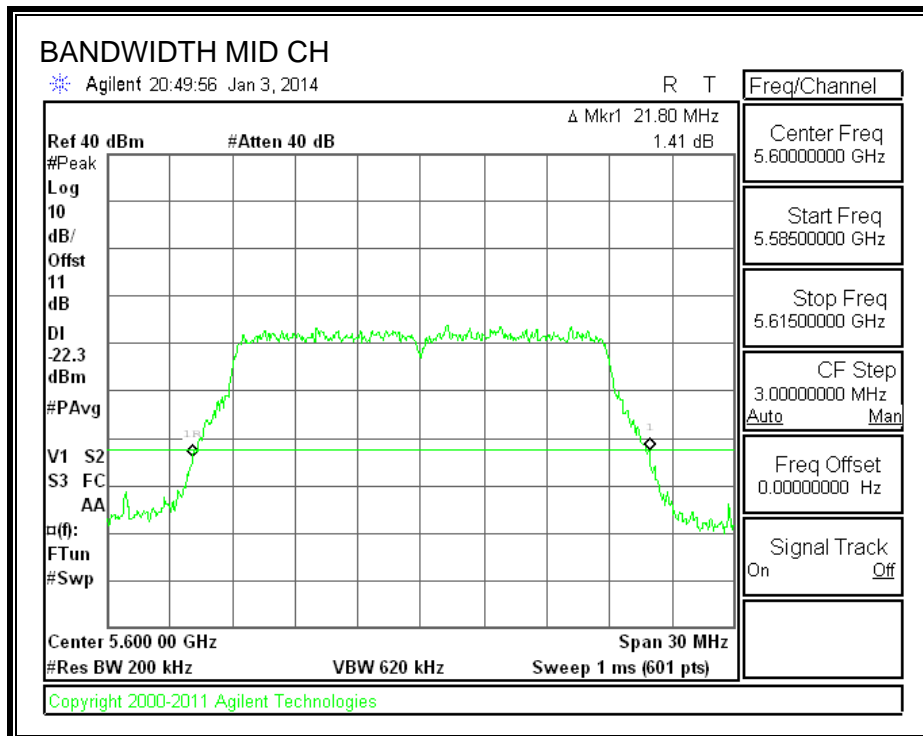

802.11n HT40 5.5G 26 dB BANDWIDTH

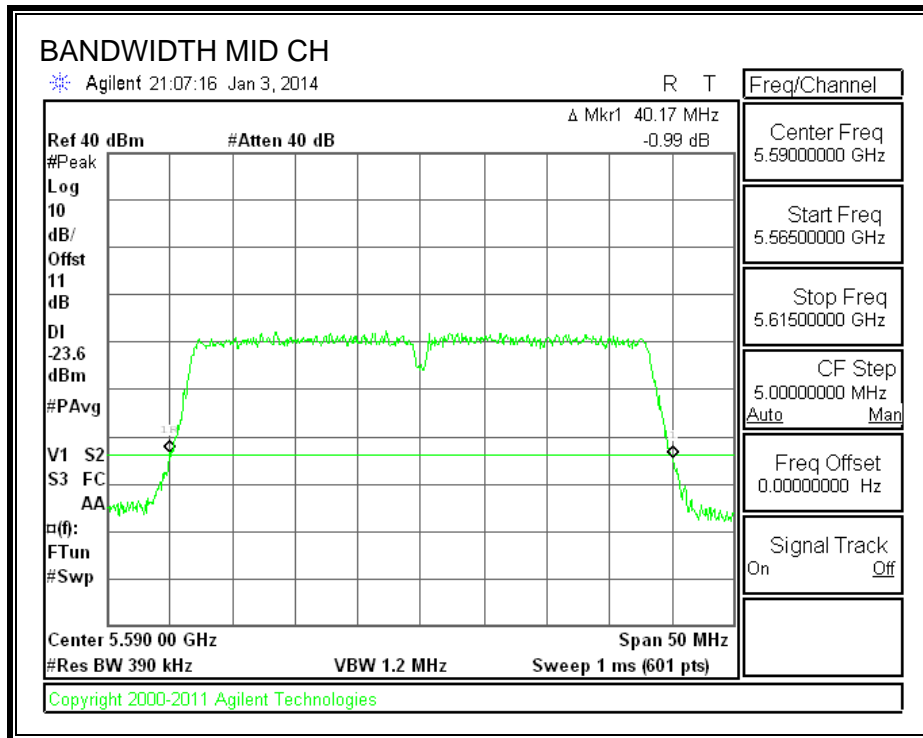

802.11ac HT80 5.5G 26 dB BANDWIDTH

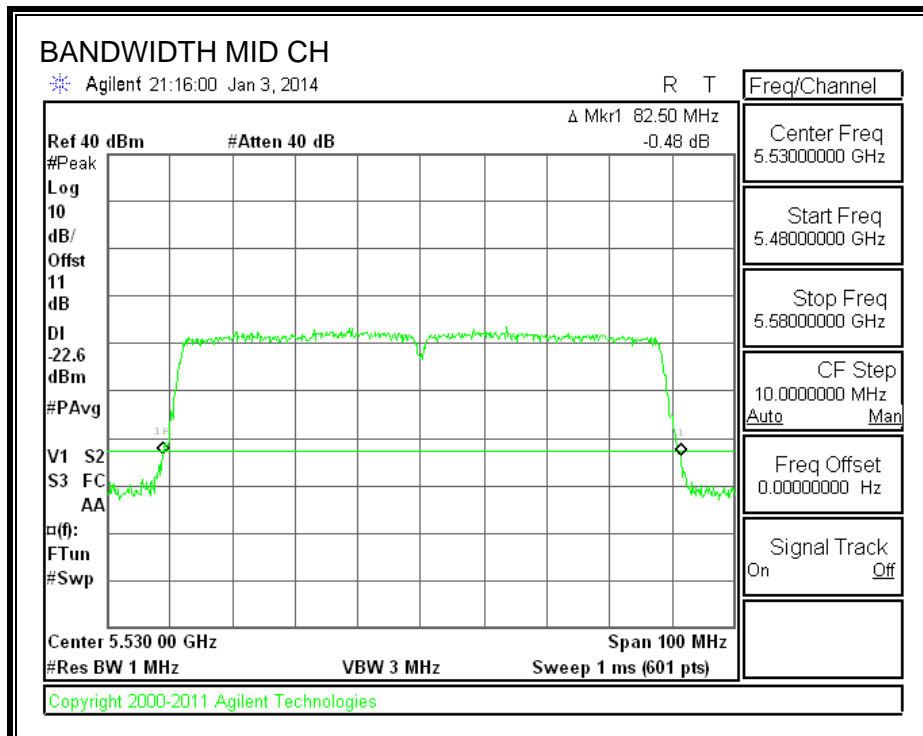

10.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

10.2.1. 802.11a MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5180	16.52
Mid	5200	16.54
High	5240	16.54
Worst		16.54

10.2.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5180	17.66
Mid	5200	17.66
High	5240	17.66
Worst		17.66

10.2.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	36.123
Mid	5230	36.144
Worst		36.144

10.2.4. 802.11ac HT80 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5210	75.289

10.2.5. 802.11a MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5260	16.47
Mid	5300	16.46
High	5320	16.47
Worst		16.47

10.2.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5260	17.66
Mid	5300	17.66
High	5320	17.66
Worst		17.66

10.2.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5270	36.1
High	5310	36.1
Worst		36.1

10.2.8. 802.11ac HT80 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5290	75.463

10.2.9. 802.11a MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5500	16.535
Mid	5580	16.542
High	5700	16.530
Worst		16.542

10.2.10. 802.11n HT20 MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5500	17.720
Mid	5580	17.718
High	5700	17.729
Worst		17.729


10.2.11. 802.11n HT40 MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5510	36.1
Mid	5550	36.1
High	5670	36.1
Worst		36.1


10.2.12. 802.11ac HT80 MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5530	75.338
Worst		75.3


802.11a 5.2G 99% BANDWIDTH

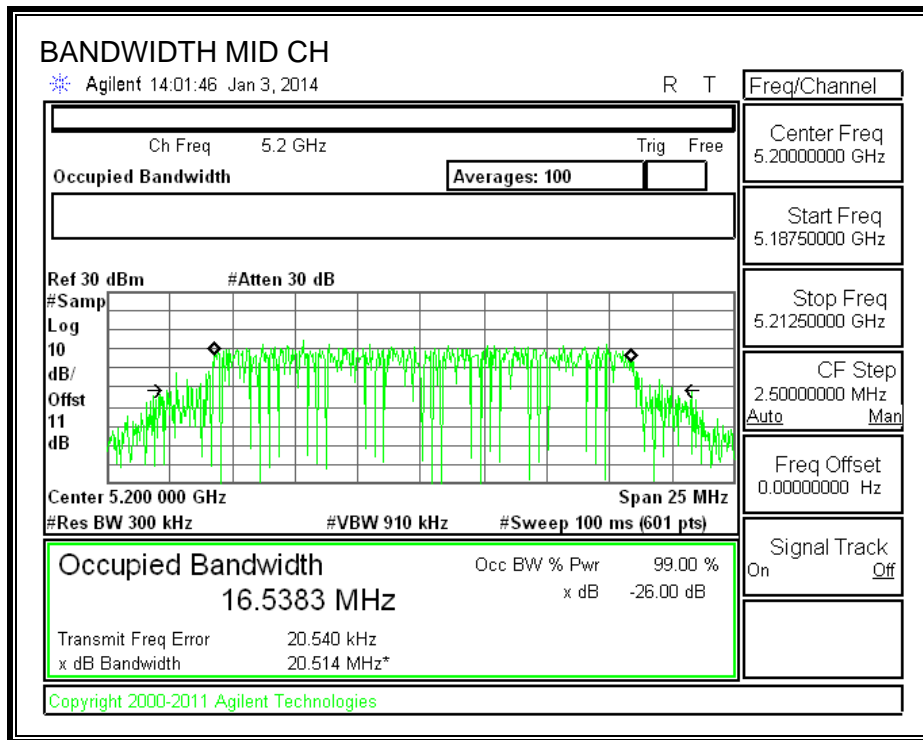

802.11n HT20 5.2G 99% BANDWIDTH

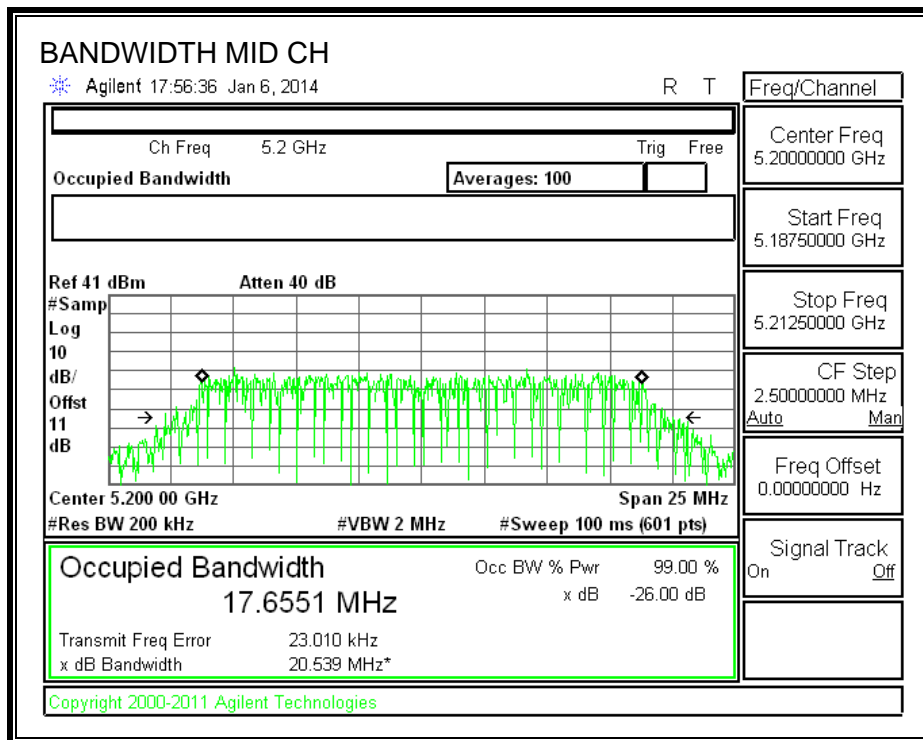


802.11n HT40 5.2G 99% BANDWIDTH

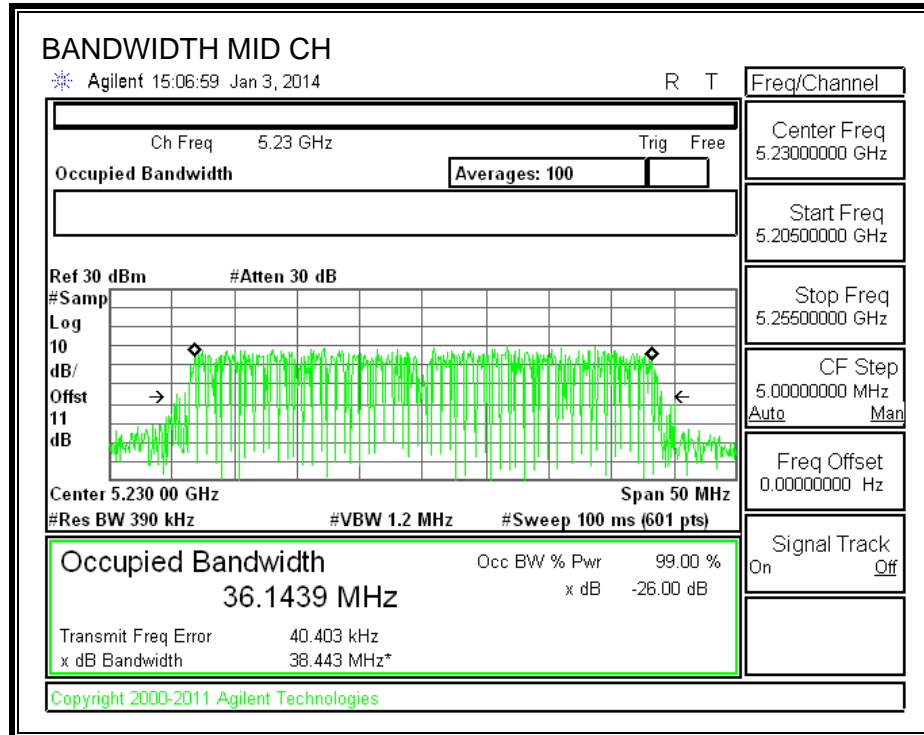


802.11ac HT80 5.2G 99% BANDWIDTH




802.11a 5.3G 99% BANDWIDTH

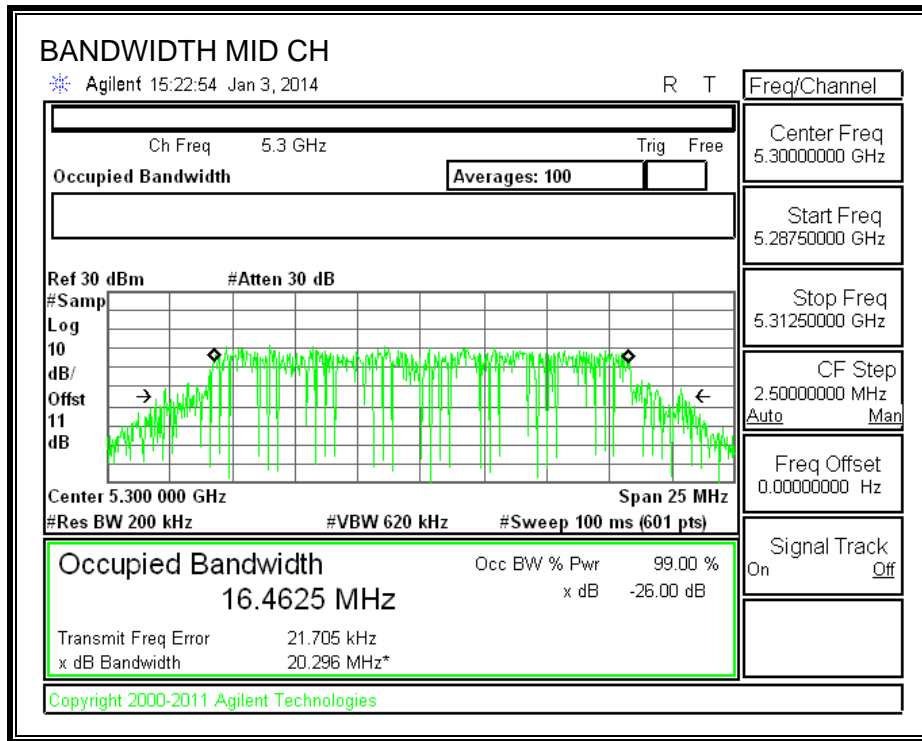


802.11n HT20 5.3G 99% BANDWIDTH

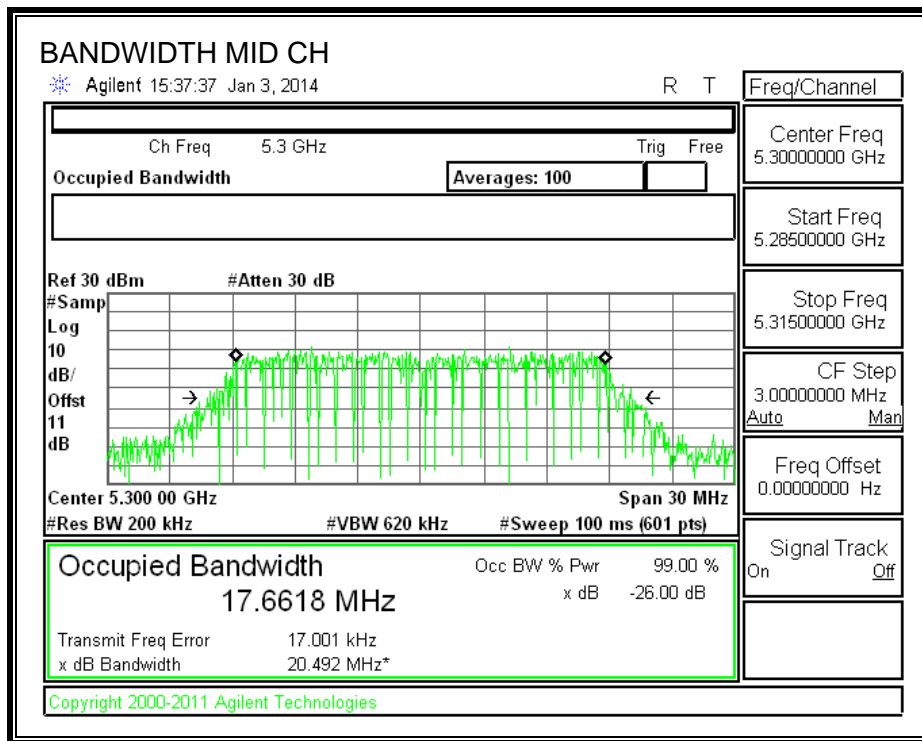


802.11n HT40 5.3G 99% BANDWIDTH

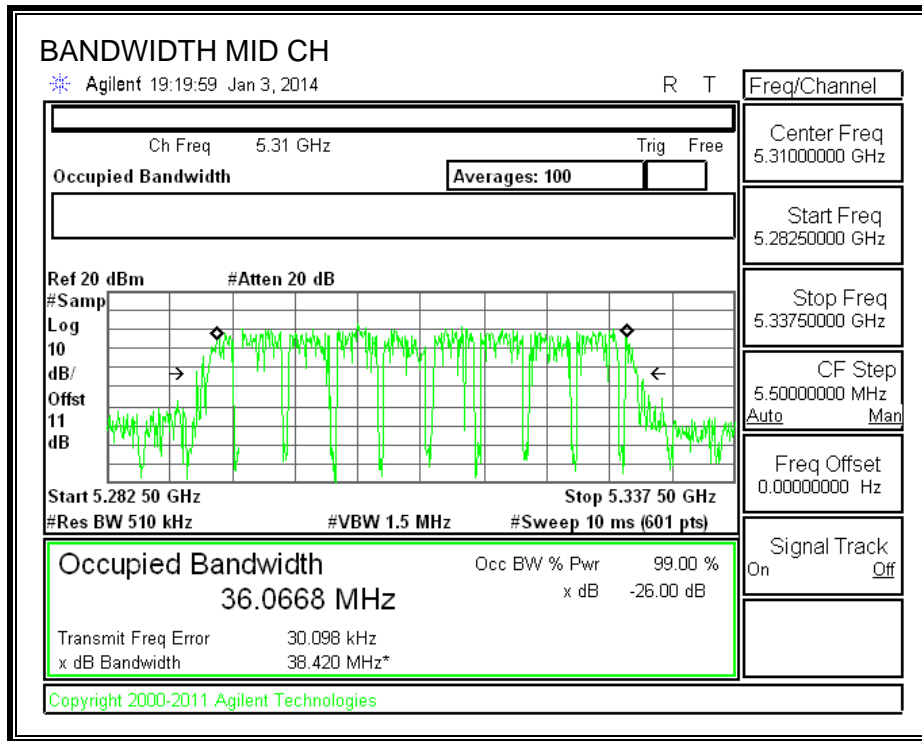


802.11ac HT80 5.3G 99% BANDWIDTH

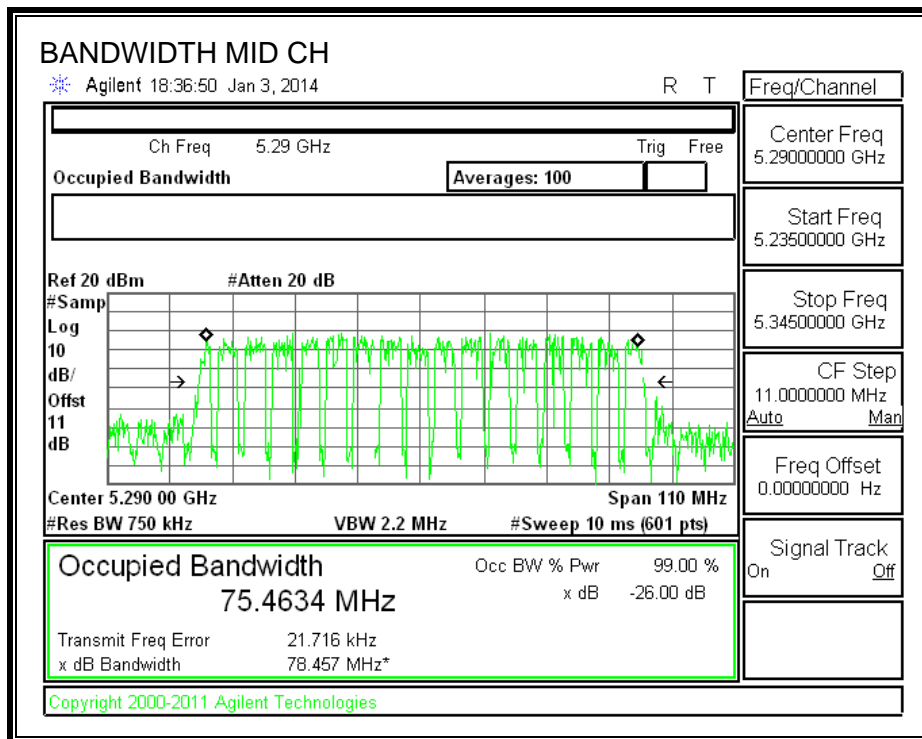


802.11a 5.5G 99% BANDWIDTH

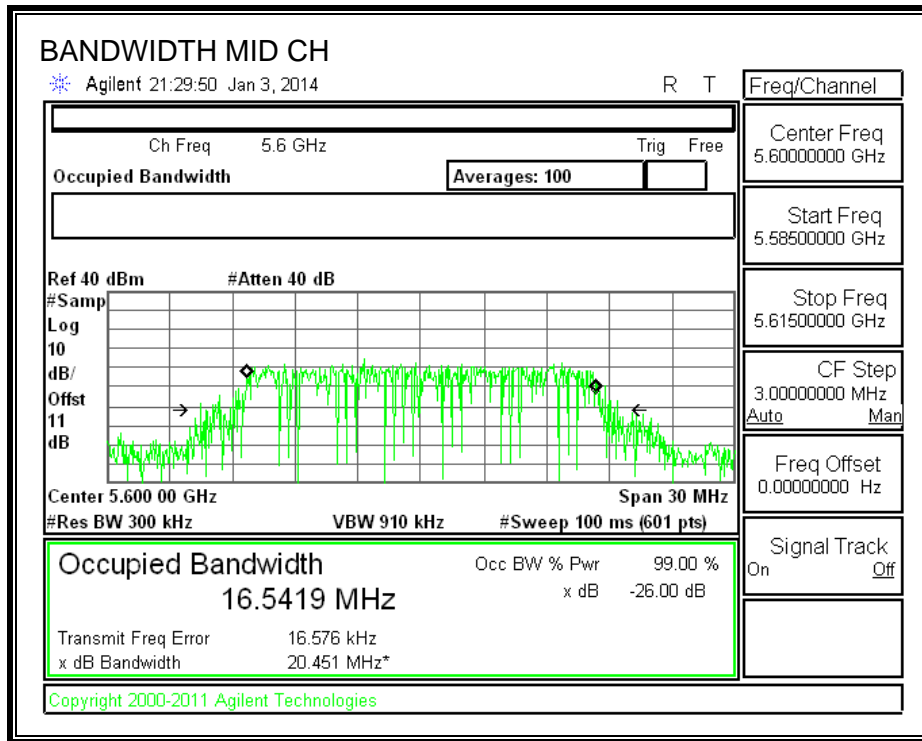


802.11n HT20 5.5G 99% BANDWIDTH

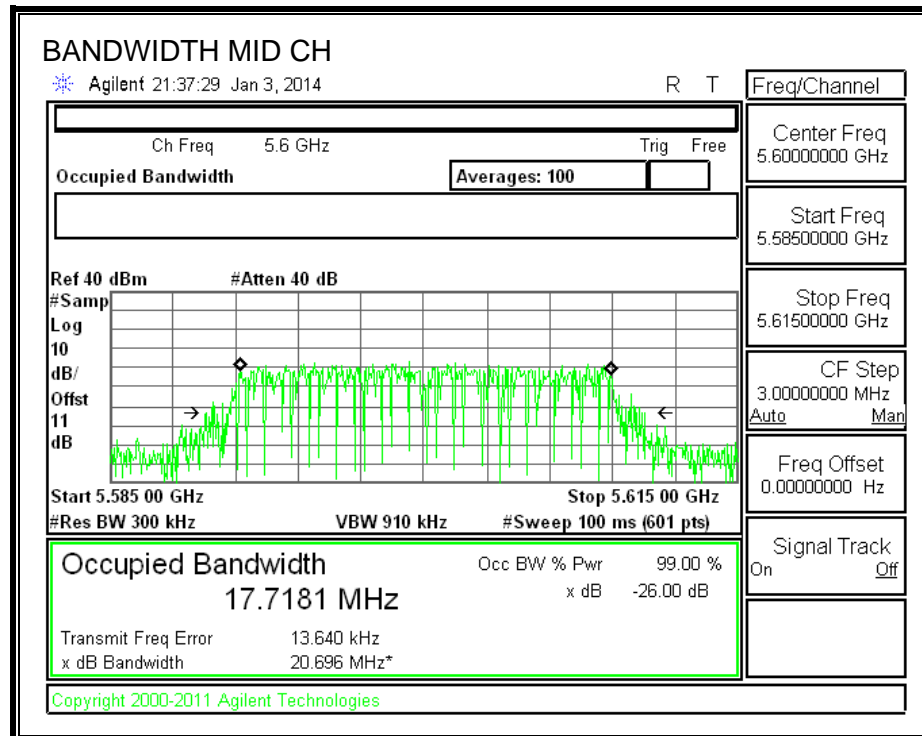

802.11n HT40 5.5G 99% BANDWIDTH

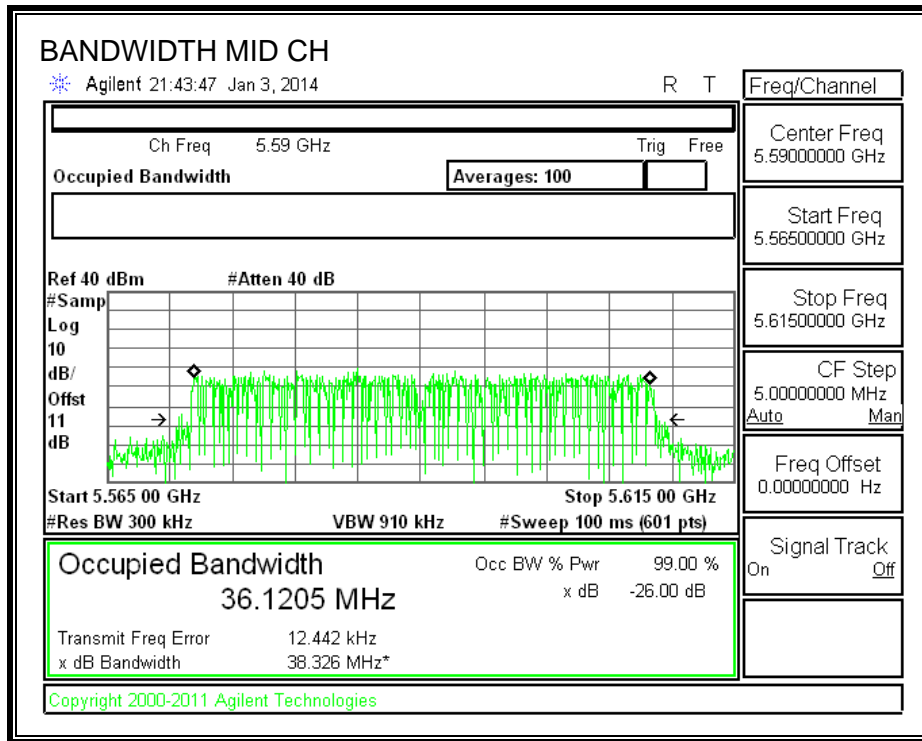

802.11ac HT80 5.5G 99% BANDWIDTH

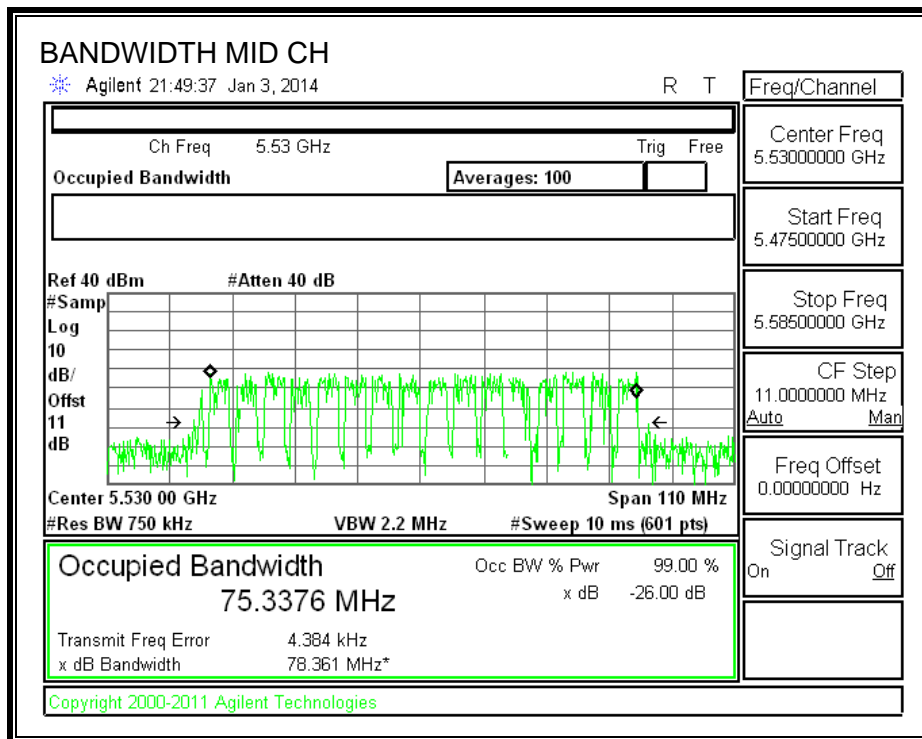

10.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

10.3.1. 802.11a MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	Avg Power (dBm)
Low	5180	12.52
Mid	5200	12.81
High	5240	13.11
Worst		13.11

10.3.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	Avg Power (dBm)
Low	5180	13.26
Mid	5200	13.06
High	5240	13.22
Worst		13.26

10.3.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	Avg Power (dBm)
Low	5190	12.000
Mid	5230	12.200
Worst		12.200

10.3.4. 802.11ac HT80 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	Avg Power (dBm)
Low	5210	10.960

10.3.5. 802.11a MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	Avg Power (dBm)
Low	5260	13.01
Mid	5300	13.14
High	5320	13.20
Worst		13.20

10.3.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	Avg Power (dBm)
Low	5260	13.37
Mid	5300	13.34
High	5320	13.36
Worst		13.37

10.3.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	Avg Power (dBm)
Low	5270	12.1
High	5310	12.2
Worst		12.2

10.3.8. 802.11ac HT80 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	Avg Power (dBm)
Low	5290	11.140

10.3.9. 802.11a MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	Avg Power (dBm)
Low	5500	13.270
Mid	5580	13.530
High	5700	13.710
Worst		13.710

10.3.10. 802.11n HT20 MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	Avg Power (dBm)
Low	5500	13.030
Mid	5580	13.350
High	5700	13.610
Worst		13.610

10.3.11. 802.11n HT40 MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	Avg Power (dBm)
Low	5510	12.1
Mid	5550	12.3
High	5670	12.5
Worst		12.5

10.3.12. 802.11ac HT80 MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	Avg Power (dBm)
Low	5530	11.130
Worst		11.1

10.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC RSS-210 A9.2 (1)

The maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Test Methodology

RESULTS

10.4.1. 802.11a MODE IN THE 5.2 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5180	21.600	16.522	2.08
Mid	5200	21.600	16.538	2.08
High	5240	21.525	16.536	2.08

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC EIRP Limit (dBm)	Max IC Power (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC eirp PSD Limit (dBm)	PPSD Limit (dBm)
Low	5180	17.00	22.18	20.10	17.00	4.00	10.00	4.00
Mid	5200	17.00	22.18	20.10	17.00	4.00	10.00	4.00
High	5240	17.00	22.18	20.10	17.00	4.00	10.00	4.00

Duty Cycle CF (dB)	0.31	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	13.882	14.19	17.00	-2.81
Mid	5200	13.775	14.09	17.00	-2.92
High	5240	14.033	14.34	17.00	-2.66

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5180	2.680	2.99	4.00	-1.01
Mid	5200	2.500	2.81	4.00	-1.19
High	5240	2.730	3.04	4.00	-0.96

10.4.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5180	21.920	17.665	2.08
Mid	5200	21.880	17.655	2.08
High	5240	21.920	17.663	2.08

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC EIRP Limit (dBm)	Max IC Power (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC eirp PSD Limit (dBm)	PPSD Limit (dBm)
Low	5180	17.00	22.47	20.39	17.00	4.00	10.00	4.00
Mid	5200	17.00	22.47	20.39	17.00	4.00	10.00	4.00
High	5240	17.00	22.47	20.39	17.00	4.00	10.00	4.00

Duty Cycle CF (dB)	0.31	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	13.688	14.00	17.00	-3.00
Mid	5200	13.766	14.08	17.00	-2.92
High	5240	13.995	14.31	17.00	-2.70

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5180	2.090	2.40	4.00	-1.60
Mid	5200	2.210	2.52	4.00	-1.48
High	5240	2.430	2.74	4.00	-1.26

10.4.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5190	40.42	36.123	2.08
Mid	5230	40.42	36.144	2.08

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC EIRP Limit (dBm)	Max IC Power (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC eirp PSD Limit (dBm)	PPSD Limit (dBm)
Low	5190	17.00	23.00	20.92	17.00	4.00	10.00	4.00
Mid	5230	17.00	23.00	20.92	17.00	4.00	10.00	4.00
Duty Cycle CF (dB)		0.62	Included in Calculations of Corr'd Power & PPSD					

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	12.560	13.18	17.00	-3.82
Mid	5230	12.623	13.24	17.00	-3.76

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5190	-2.120	-1.50	4.00	-5.50
Mid	5230	-2.000	-1.38	4.00	-5.38

10.4.4. 802.11ac HT80 MODE IN THE 5.2 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5210	81.600	75.289	2.08

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC EIRP Limit (dBm)	Max IC Power (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC eirp PSD Limit (dBm)	PPSD Limit (dBm)
Low	5210	17.00	23.00	20.92	17.00	4.00	10.00	4.00
Duty Cycle CF (dB)		1.19	Included in Calculations of Corr'd Power & PSD					

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5210	11.469	12.66	17.00	-4.34

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5210	-5.890	-4.70	4.00	-8.70

10.4.5. 802.11a MODE IN THE 5.3 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5260	21.50	16.474	1.61
Mid	5300	21.58	16.463	1.61
High	5320	21.58	16.470	1.61

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5260	24.00	23.17	29.17	23.17	11.00	11.00	11.00
Mid	5300	24.00	23.16	29.16	23.16	11.00	11.00	11.00
High	5320	24.00	23.17	29.17	23.17	11.00	11.00	11.00

Duty Cycle CF (dB)	0.31	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	13.951	14.26	23.17	-8.91
Mid	5300	14.016	14.33	23.16	-8.84
High	5320	14.310	14.62	23.17	-8.55

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5260	2.750	3.06	11.00	-7.94
Mid	5300	2.790	3.10	11.00	-7.90
High	5320	3.000	3.31	11.00	-7.69

10.4.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5260	21.79	17.660	1.61
Mid	5300	21.92	17.662	1.61
High	5320	22.00	17.664	1.61

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5260	24.00	23.47	29.47	23.47	11.00	11.00	11.00
Mid	5300	24.00	23.47	29.47	23.47	11.00	11.00	11.00
High	5320	24.00	23.47	29.47	23.47	11.00	11.00	11.00

Duty Cycle CF (dB)	0.31	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	13.879	14.19	23.47	-9.28
Mid	5300	14.029	14.34	23.47	-9.13
High	5320	14.130	14.44	23.47	-9.03

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5260	2.300	2.61	11.00	-8.39
Mid	5300	2.710	3.02	11.00	-7.98
High	5320	2.700	3.01	11.00	-7.99

10.4.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5270	40.1	36.106	1.61
High	5310	40.2	36.067	1.61

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC EIRP Limit (dBm)	Max IC Power (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC eirp PSD Limit (dBm)	PPSD Limit (dBm)
Low	5270	17.00	23.00	21.39	17.00	4.00	10.00	4.00
High	5310	17.00	23.00	21.39	17.00	4.00	10.00	4.00
Duty Cycle CF (dB)		0.62	Included in Calculations of Corr'd Power & PPSD					

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	12.875	13.50	17.00	-3.51
High	5310	12.810	13.43	17.00	-3.57

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5270	-1.520	-0.90	4.00	-4.90
High	5310	-1.310	-0.69	4.00	-4.69

10.4.8. 802.11ac HT80 MODE IN THE 5.3 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5290	82.17	75.4634	1.61

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC EIRP Limit (dBm)	Max IC Power (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC eirp PSD Limit (dBm)	PPSD Limit (dBm)
Low	5290	17.00	23.00	21.39	17.00	4.00	10.00	4.00

Duty Cycle CF (dB)	1.19	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5290	11.616	12.81	17.00	-4.19

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5290	-5.650	-4.46	4.00	-8.46

10.4.9. 802.11a MODE IN THE 5.5 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5500	21.65	16.535	2.09
Mid	5580	21.38	16.542	2.09
High	5700	21.35	16.530	2.09

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5500	24.00	23.18	29.18	23.18	11.00	11.00	11.00
Mid	5580	24.00	23.19	29.19	23.19	11.00	11.00	11.00
High	5700	24.00	23.18	29.18	23.18	11.00	11.00	11.00

Duty Cycle CF (dB)	0.31	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	13.926	14.24	23.18	-8.95
Mid	5580	13.951	14.26	23.19	-8.92
High	5700	13.887	14.20	23.18	-8.99

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5500	2.640	2.95	11.00	-8.05
Mid	5580	2.750	3.06	11.00	-7.94
High	5700	2.640	2.95	11.00	-8.05

10.4.10. 802.11n HT20 MODE IN THE 5.5 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5500	21.80	17.720	2.09
Mid	5580	21.80	17.718	2.09
High	5700	21.70	17.729	2.09

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5500	24.00	23.48	29.48	23.48	11.00	11.00	11.00
Mid	5580	24.00	23.48	29.48	23.48	11.00	11.00	11.00
High	5700	24.00	23.49	29.49	23.49	11.00	11.00	11.00

Duty Cycle CF (dB)	0.31	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	13.954	14.26	23.48	-9.22
Mid	5580	13.925	14.24	23.48	-9.25
High	5700	13.635	13.95	23.49	-9.54

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5500	2.340	2.65	11.00	-8.35
Mid	5580	2.290	2.60	11.00	-8.40
High	5700	2.020	2.33	11.00	-8.67

10.4.11. 802.11n HT40 MODE IN THE 5.5 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5510	39.9	36.108	2.09
Mid	5550	40.2	36.121	2.09
High	5670	40.3	36.123	2.09

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5510	24.00	24.00	30.00	24.00	11.00	11.00	11.00
Mid	5550	24.00	24.00	30.00	24.00	11.00	11.00	11.00
High	5670	24.00	24.00	30.00	24.00	11.00	11.00	11.00

Duty Cycle CF (dB)	0.62	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	12.678	13.30	24.00	-10.70
Mid	5550	12.770	13.39	24.00	-10.61
High	5670	12.735	13.36	24.00	-10.65

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5510	-2.010	-1.39	11.00	-12.39
Mid	5550	-1.550	-0.93	11.00	-11.93
High	5670	-1.640	-1.02	11.00	-12.02

10.4.12. 802.11ac HT80 MODE IN THE 5.5 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5530	82.500	75.338	2.09

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5530	24.00	24.00	30.00	24.00	11.00	11.00	11.00

Duty Cycle CF (dB)	1.19	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	11.151	12.34	24.00	-11.66


PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5530	-6.030	-4.84	11.00	-15.84


802.11a 5.2G OUTPUT POWER AND PPSD, Chain 0

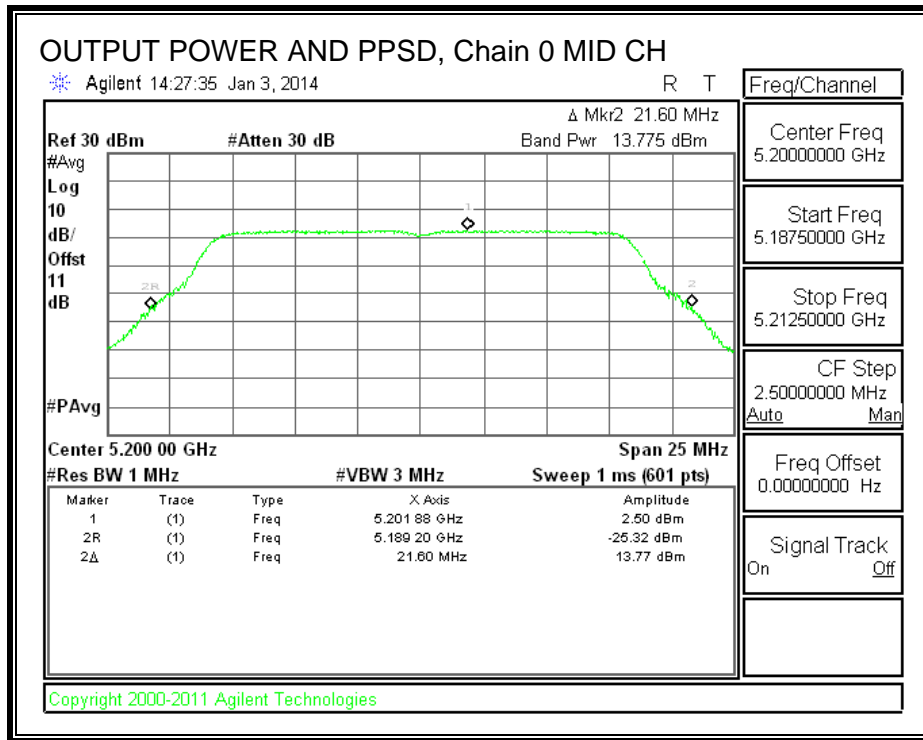


802.11n HT20 5.2G OUTPUT POWER AND PPSD, Chain 0

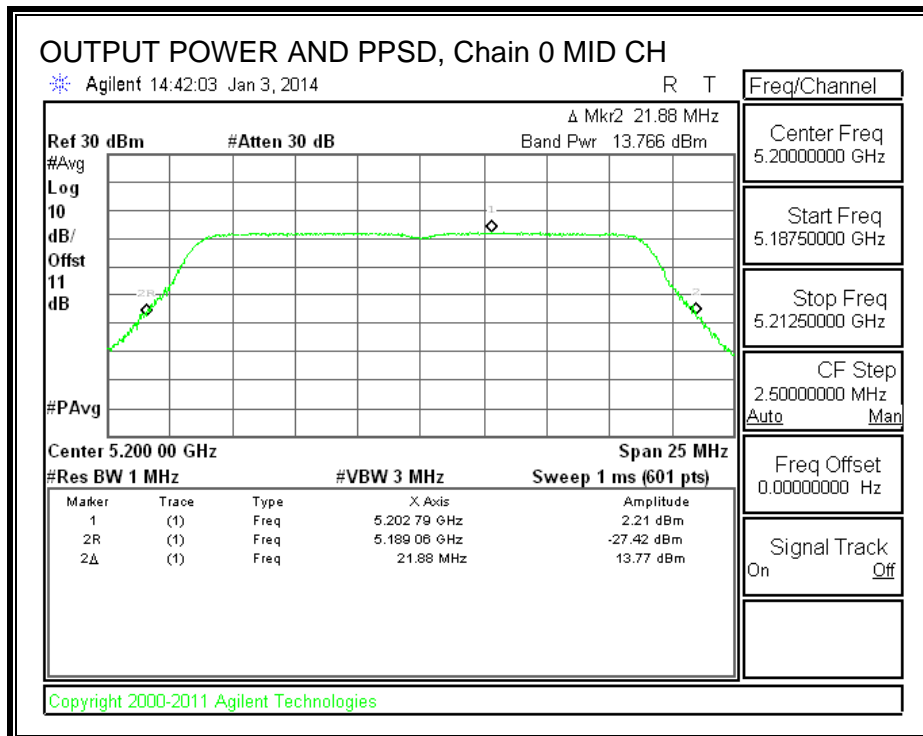


802.11n HT40 5.2G OUTPUT POWER AND PPSD, Chain 0

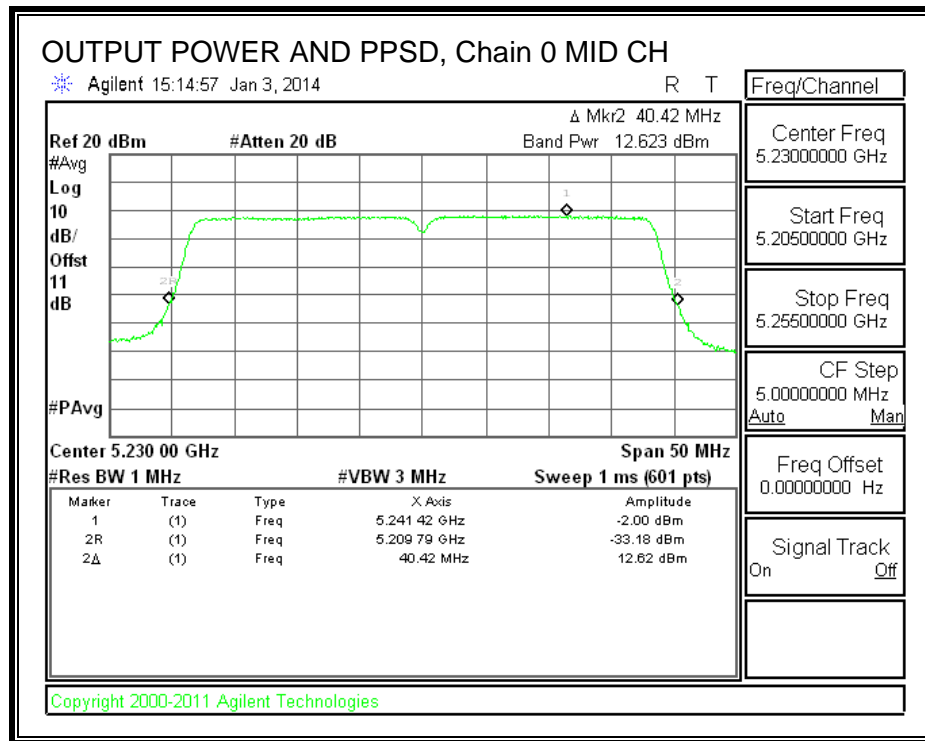


802.11ac HT80 5.2G OUTPUT POWER AND PPSD, Chain 0

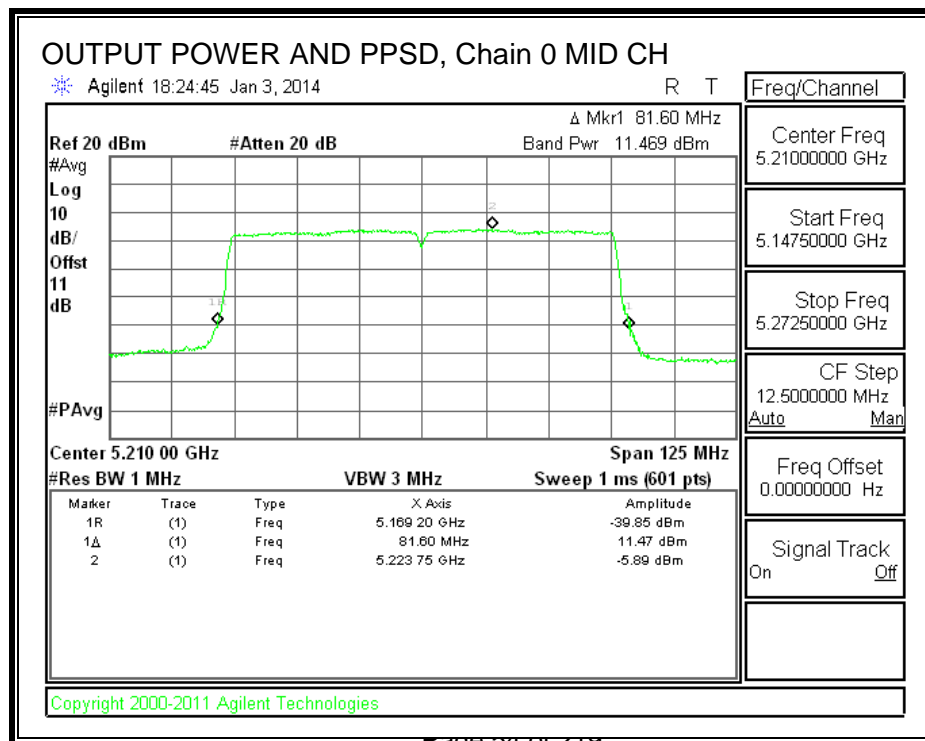


802.11a 5.3G OUTPUT POWER AND PPSD, Chain 0

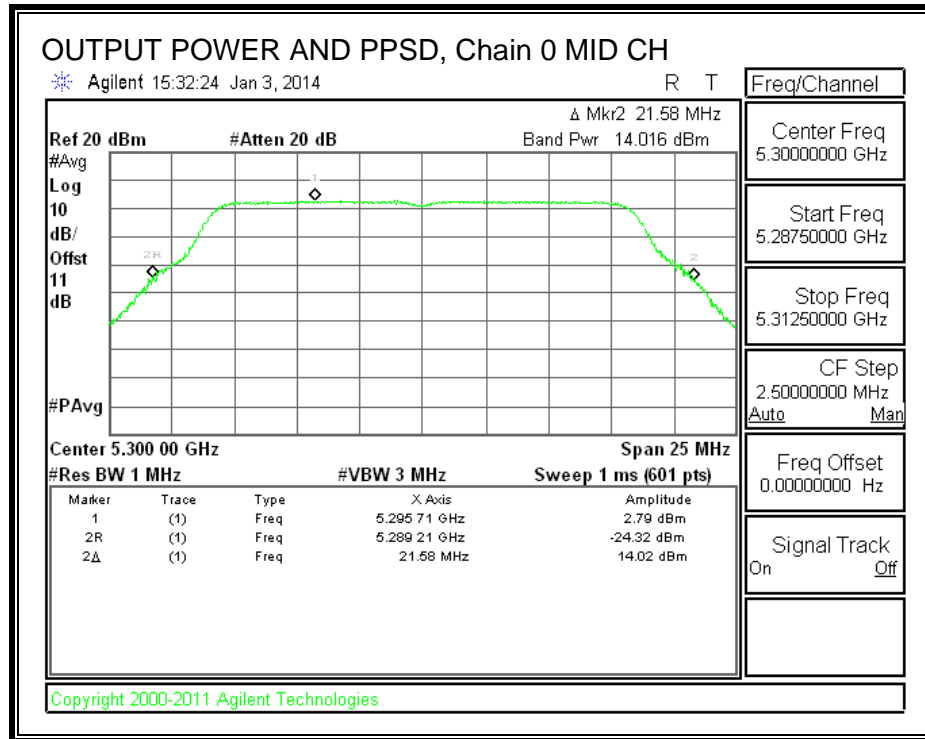


802.11n HT20 5.3G OUTPUT POWER AND PPSD, Chain 0

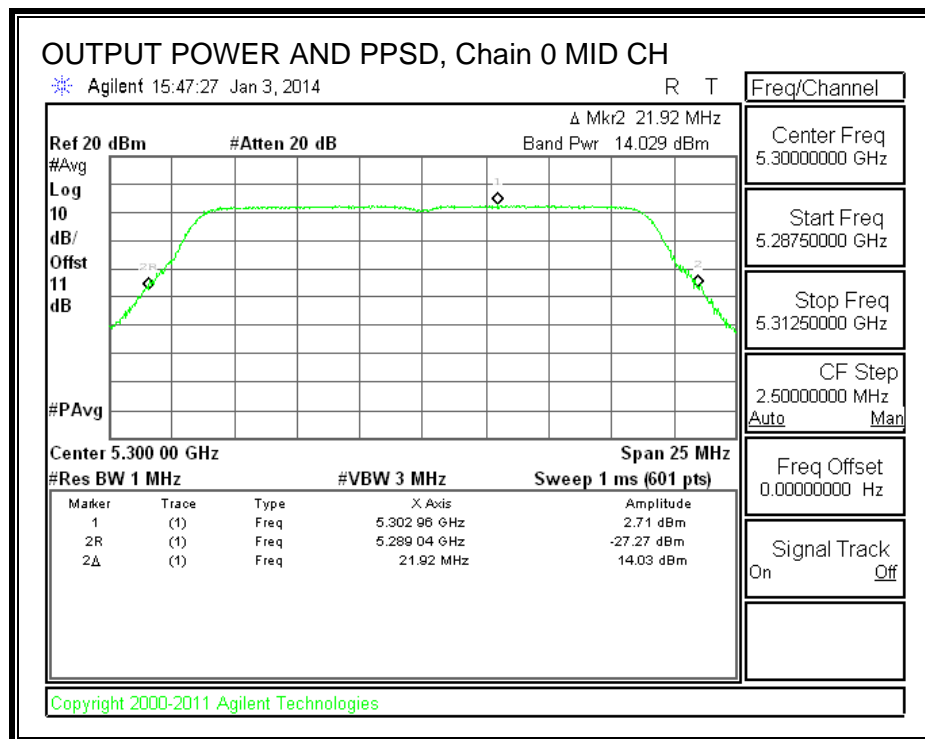


802.11n HT40 5.3G OUTPUT POWER AND PPSD, Chain 0

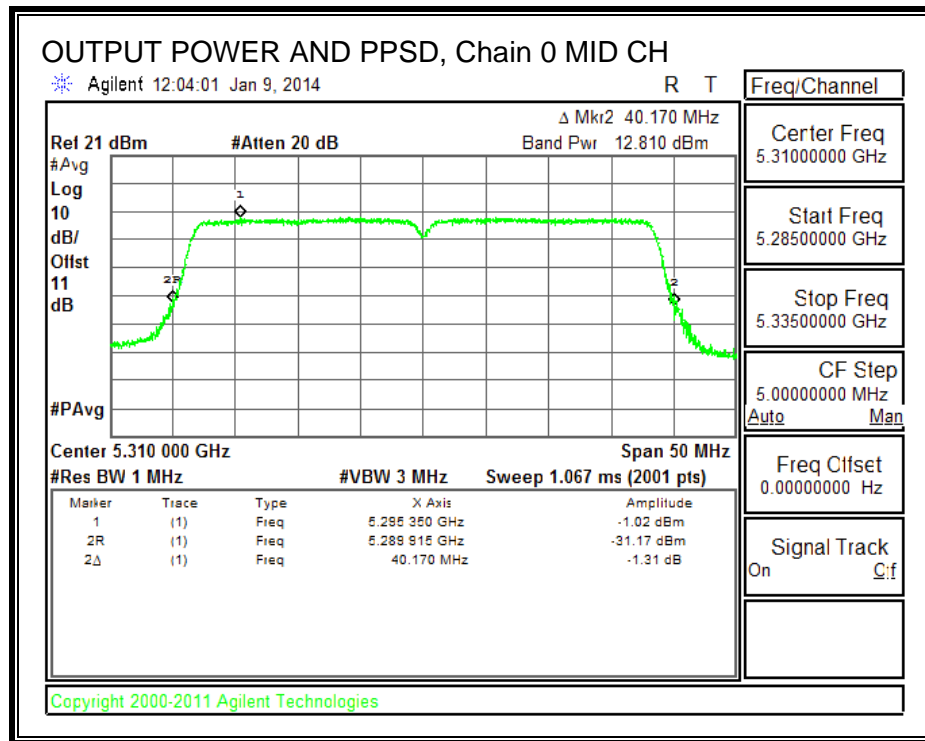


802.11ac HT80 5.3G OUTPUT POWER AND PPSD, Chain 0

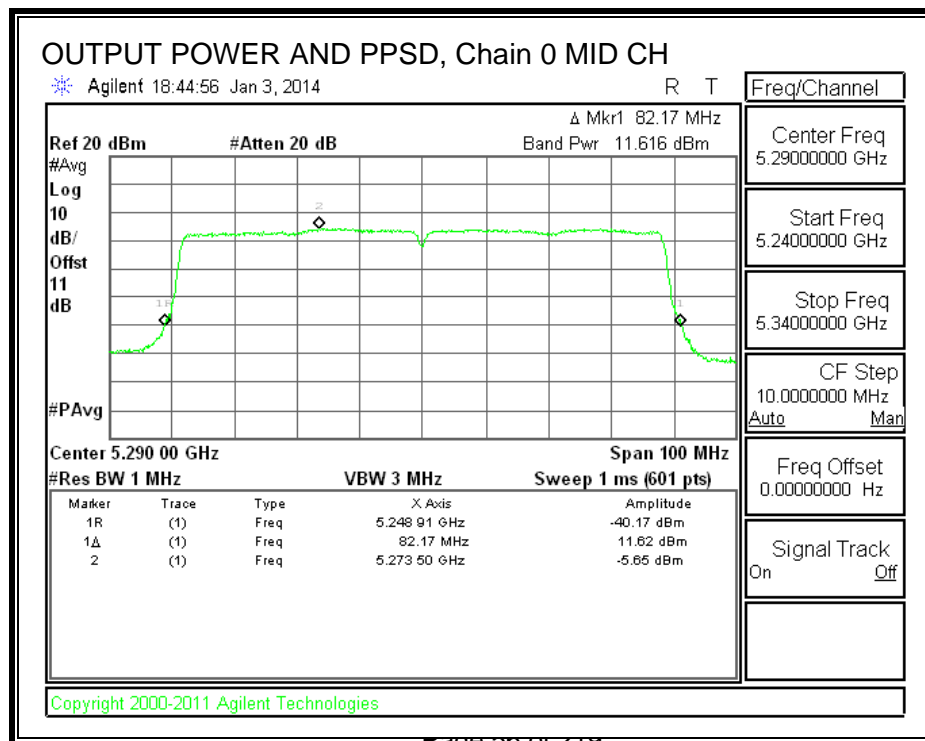


802.11a 5.5G OUTPUT POWER AND PPSD, Chain 0

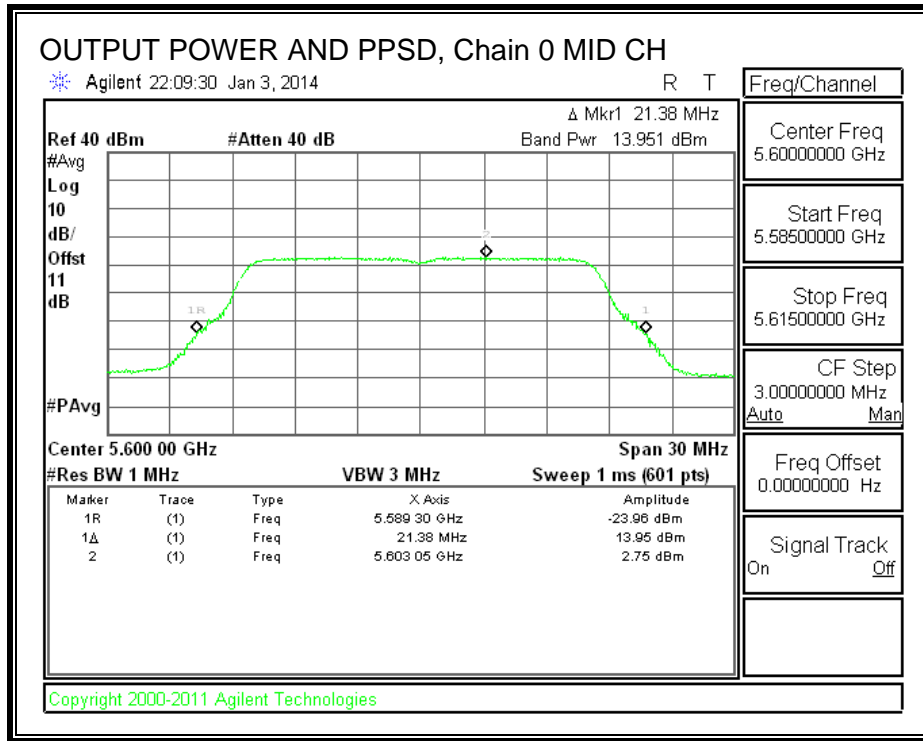


802.11n HT20 5.5G OUTPUT POWER AND PPSD, Chain 0

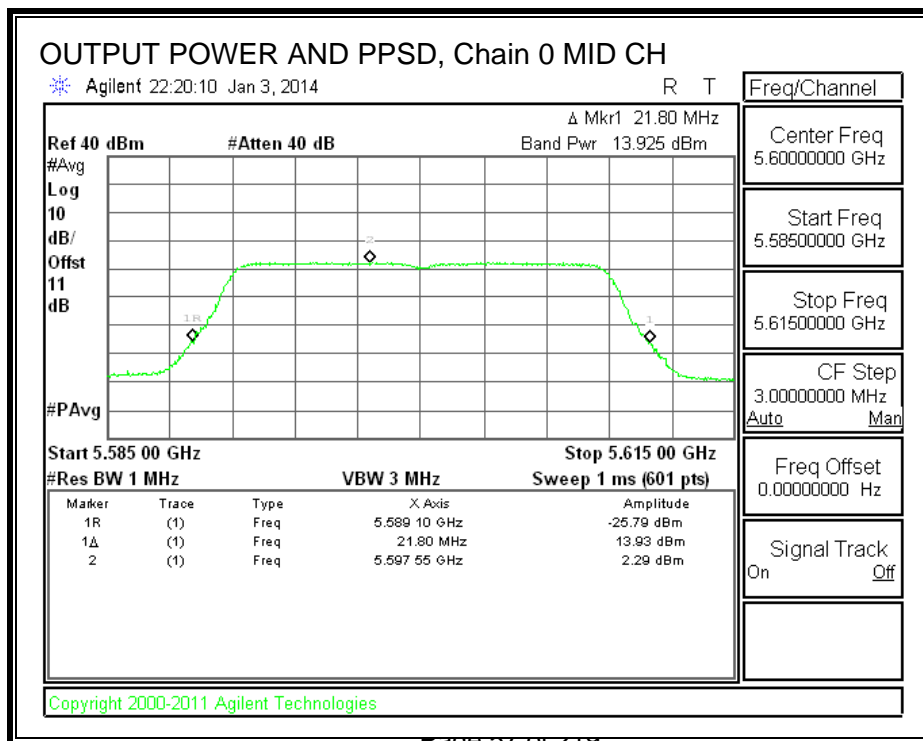

802.11n HT40 5.5G OUTPUT POWER AND PPSD, Chain 0

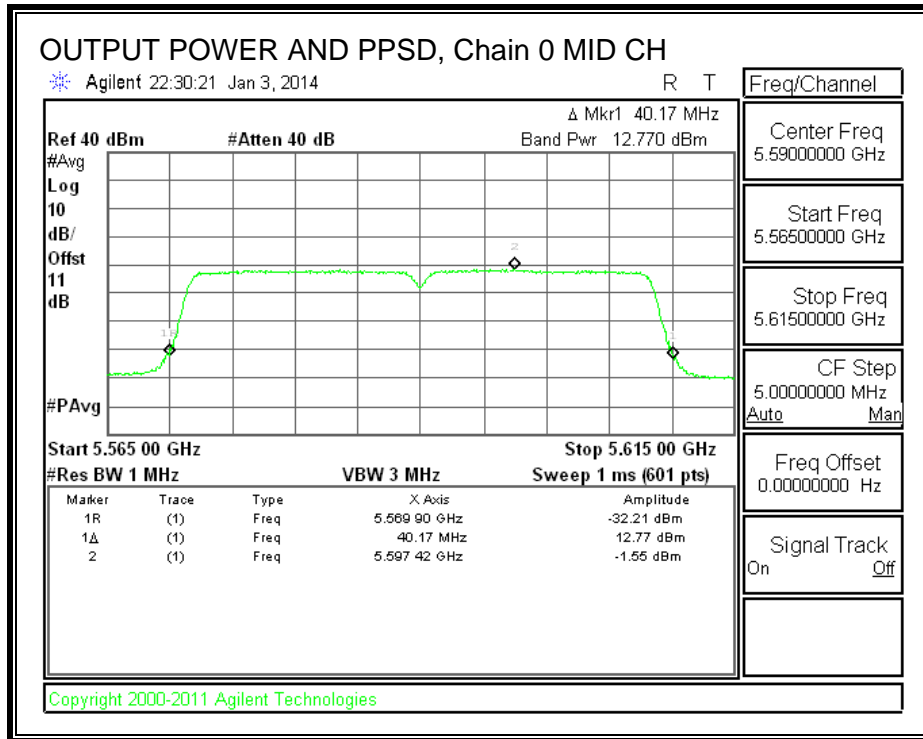

802.11ac HT80 5.5G OUTPUT POWER AND PPSD, Chain 0

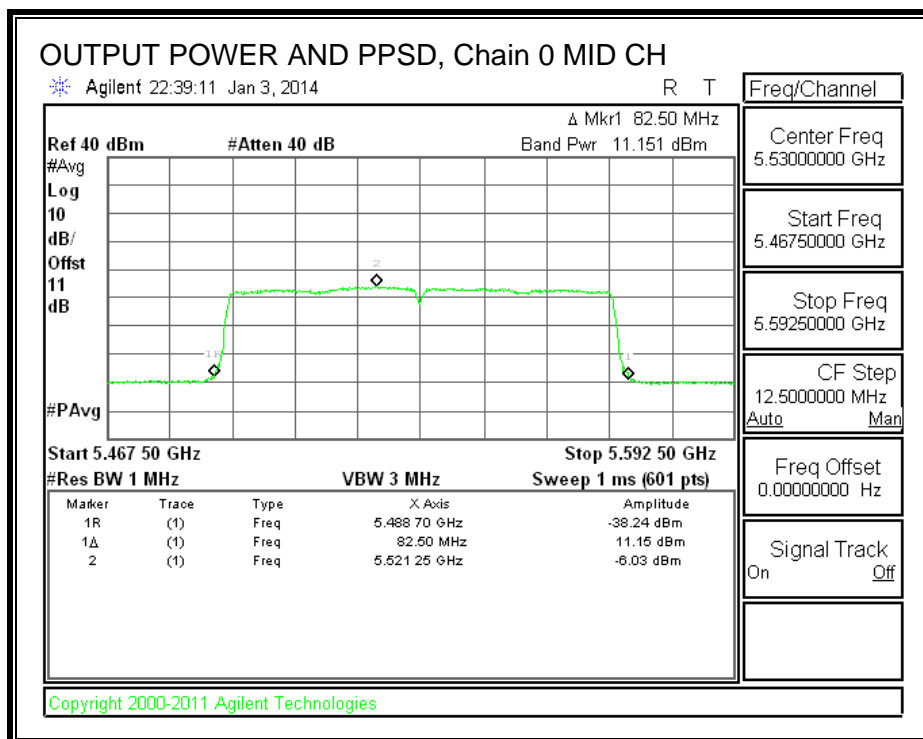

10.5. PEAK EXCURSION

LIMITS

FCC §15.407 (a) (6)


The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

RESULTS

10.5.1. 802.11a MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	PK Level (dBm)	PSD (dBm)	DCCF (dB)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Mid	5200	10.640	2.73	0.31	7.60	13	-5.40


PEAK EXCURSION

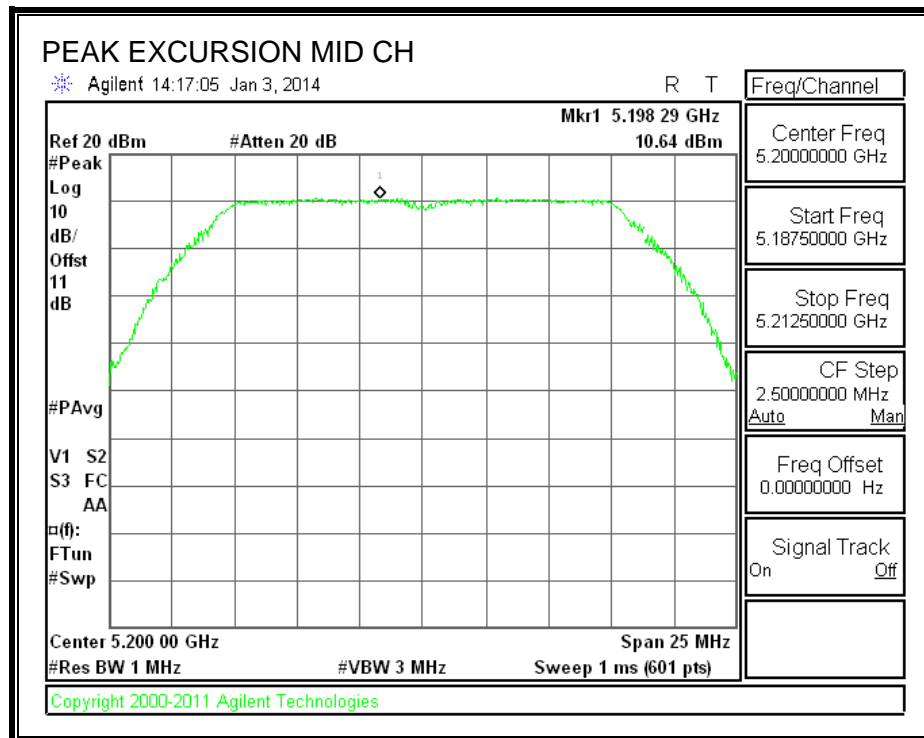

10.5.1. 802.11n HT20 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	PK Level (dBm)	PSD (dBm)	DCCF (dB)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Mid	5200	11.180	2.43	0.31	8.44	13	-4.56


PEAK EXCURSION

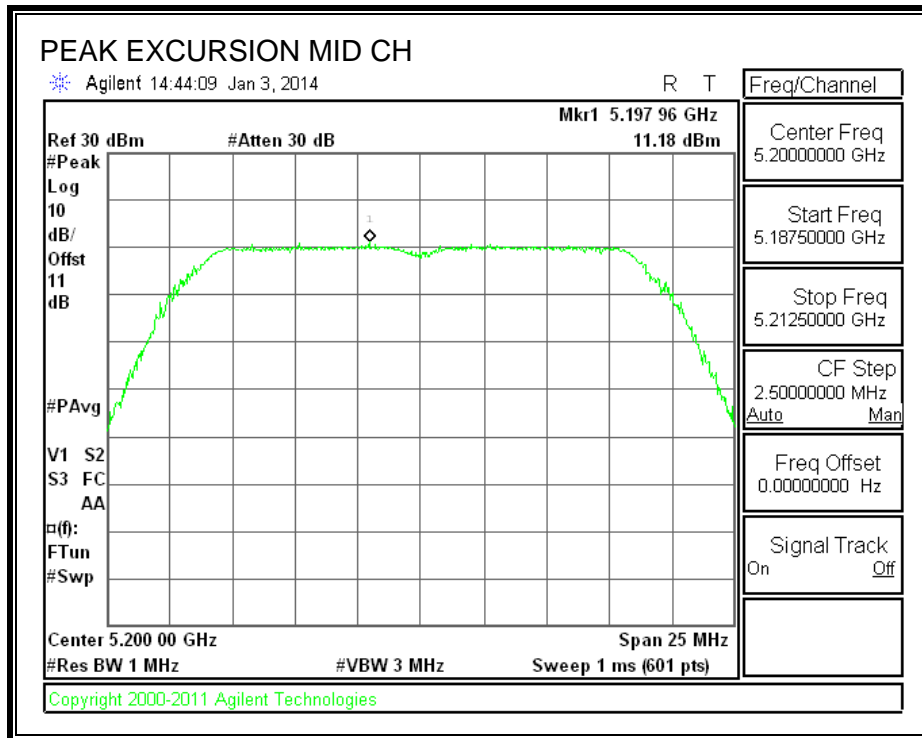

10.5.1. 802.11n HT40 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	PK Level (dBm)	PSD (dBm)	DCCF (dB)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Mid	5230	6.930	-2.00	0.62	8.31	13	-4.69


PEAK EXCURSION

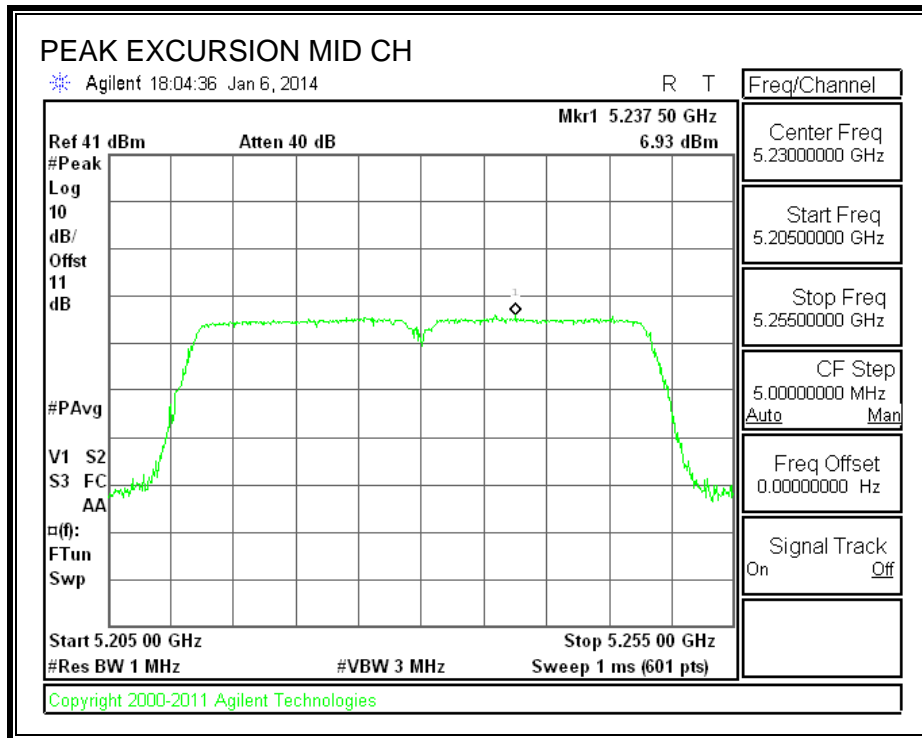

10.5.1. 802.11ac HT80 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	PK Level (dBm)	PSD (dBm)	DCCF (dB)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Mid	5210	3.490	-5.89	1.19	8.19	13	-4.81

PEAK EXCURSION

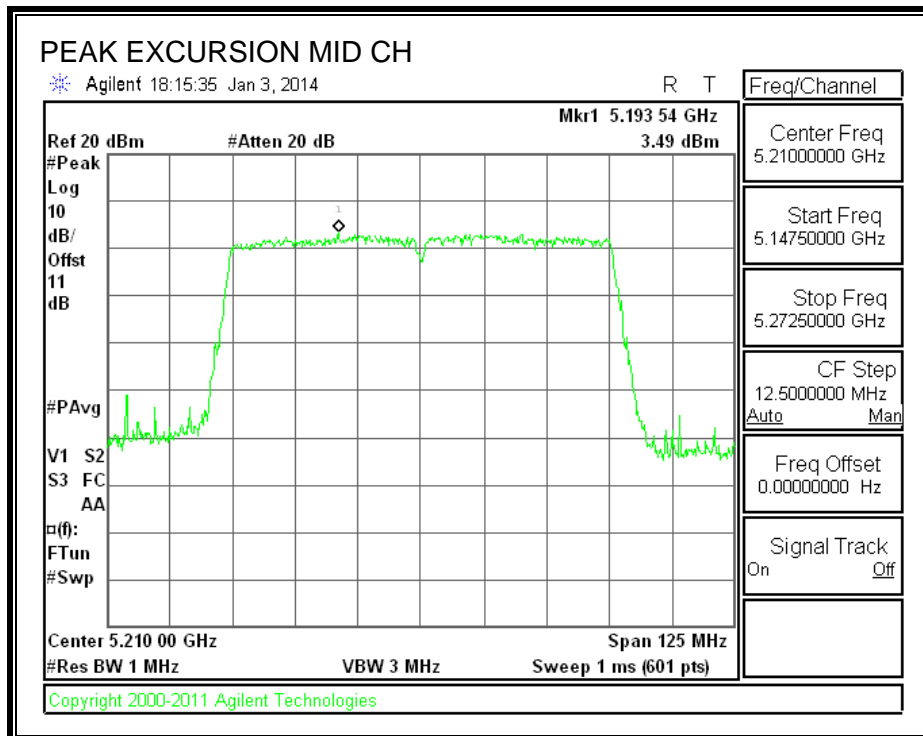

11. TRANSMITTER ABOVE 1 GHz

LIMITS

FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Reference to KDB 789033 UNII part H) 6) d) Method VB:

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor to the reading offset for average measurements.



The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.



The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

11.1. 5.2 GHz


**11.1.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.2 GHz BAND
 RESTRICTED BANDEDGE (LOW CHANNEL)**

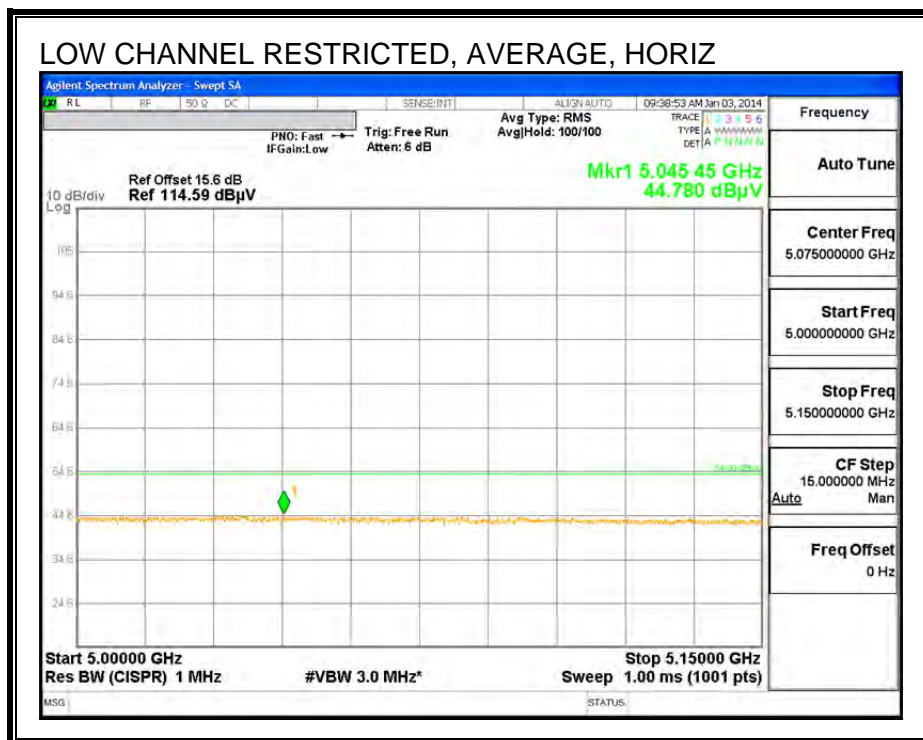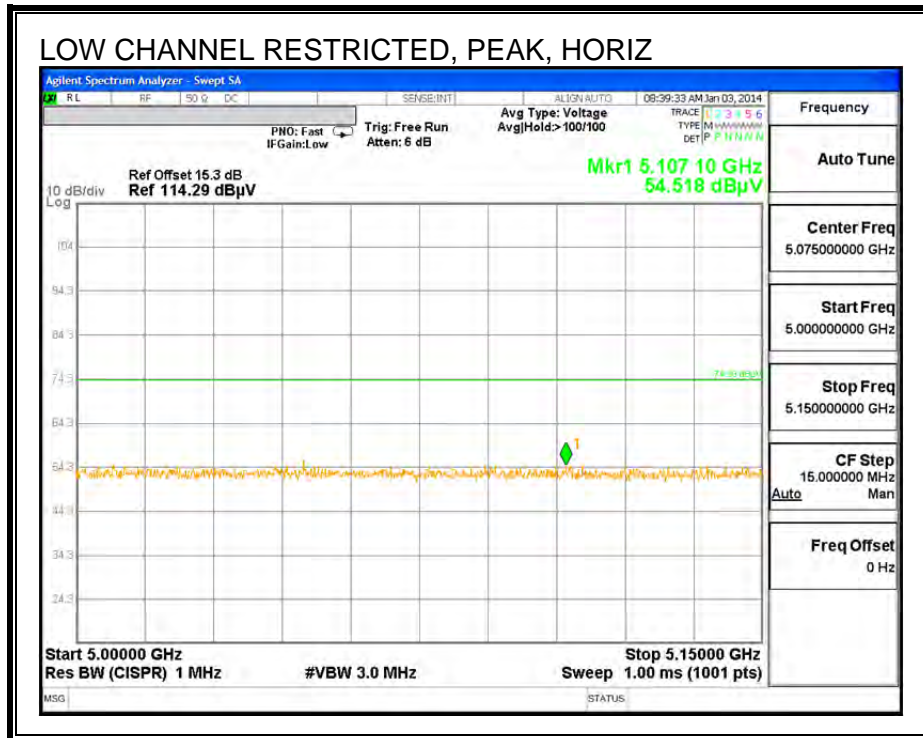


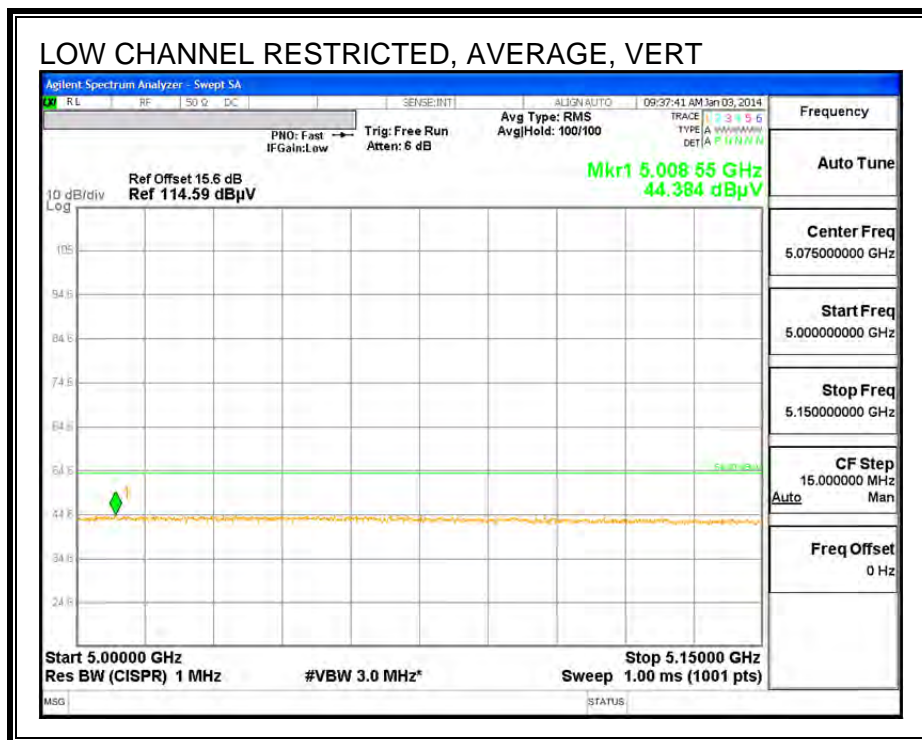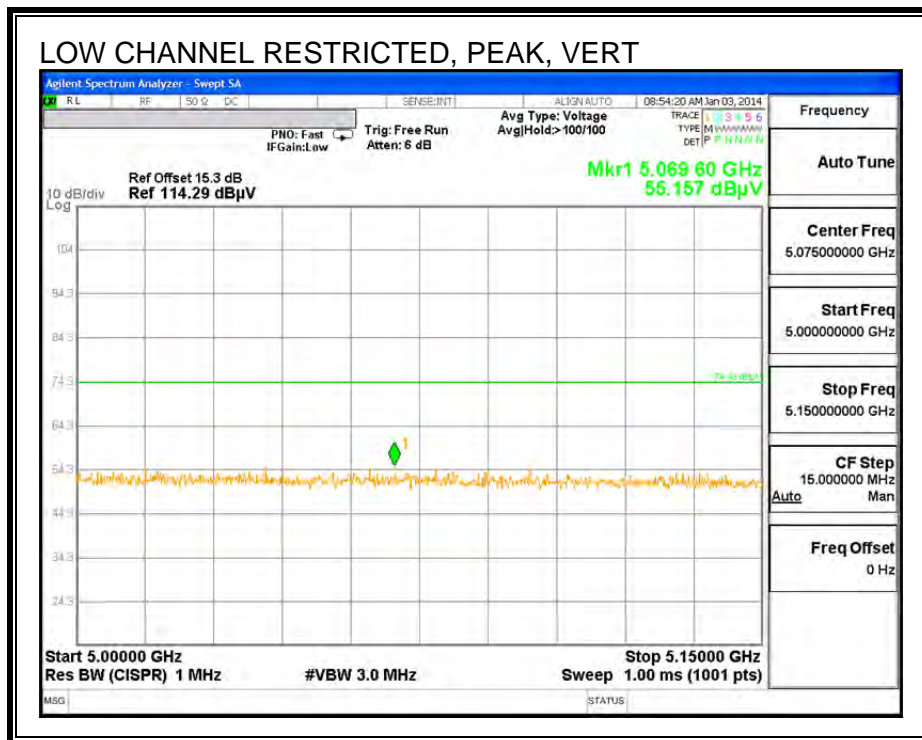

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL
 HORIZONTAL

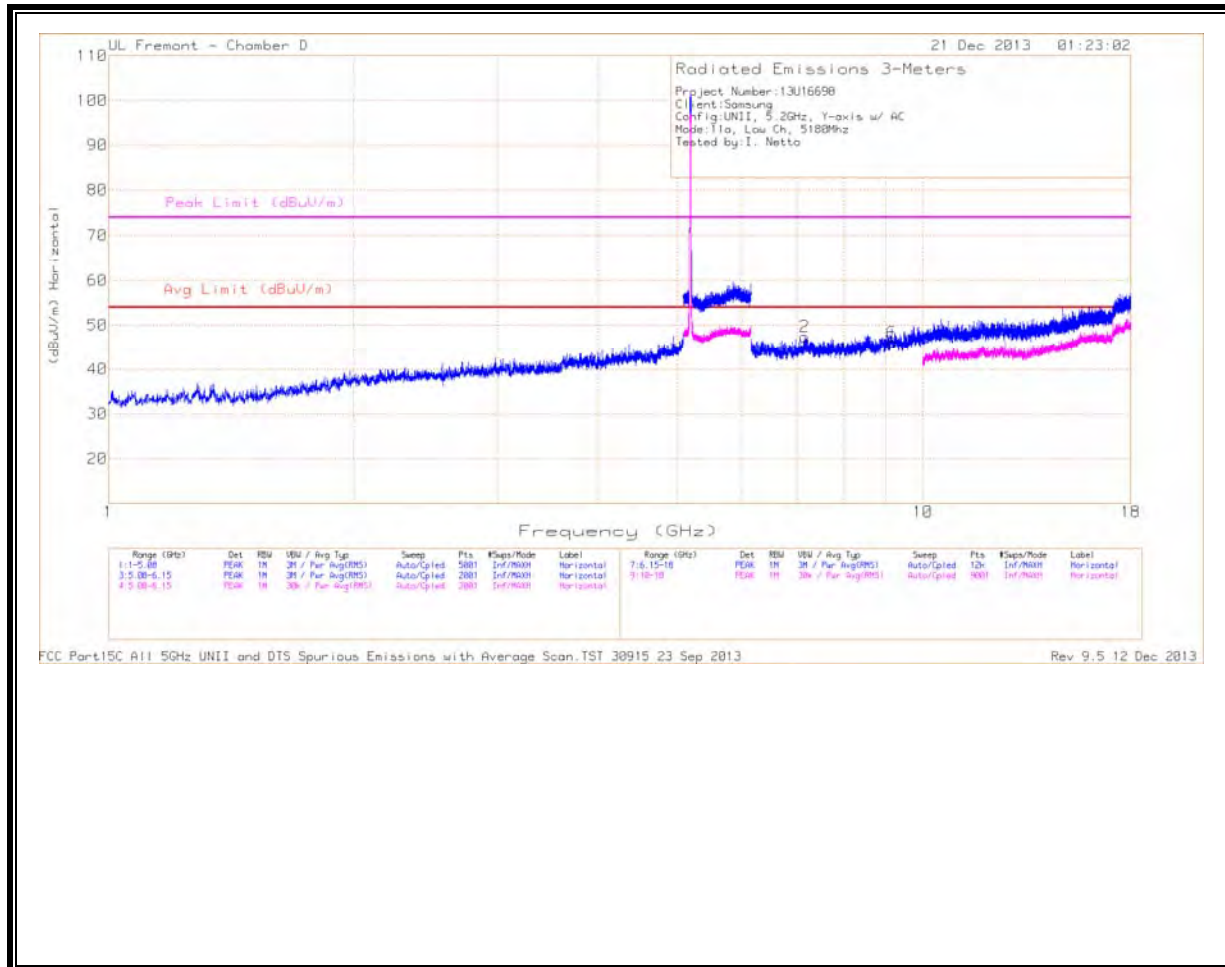


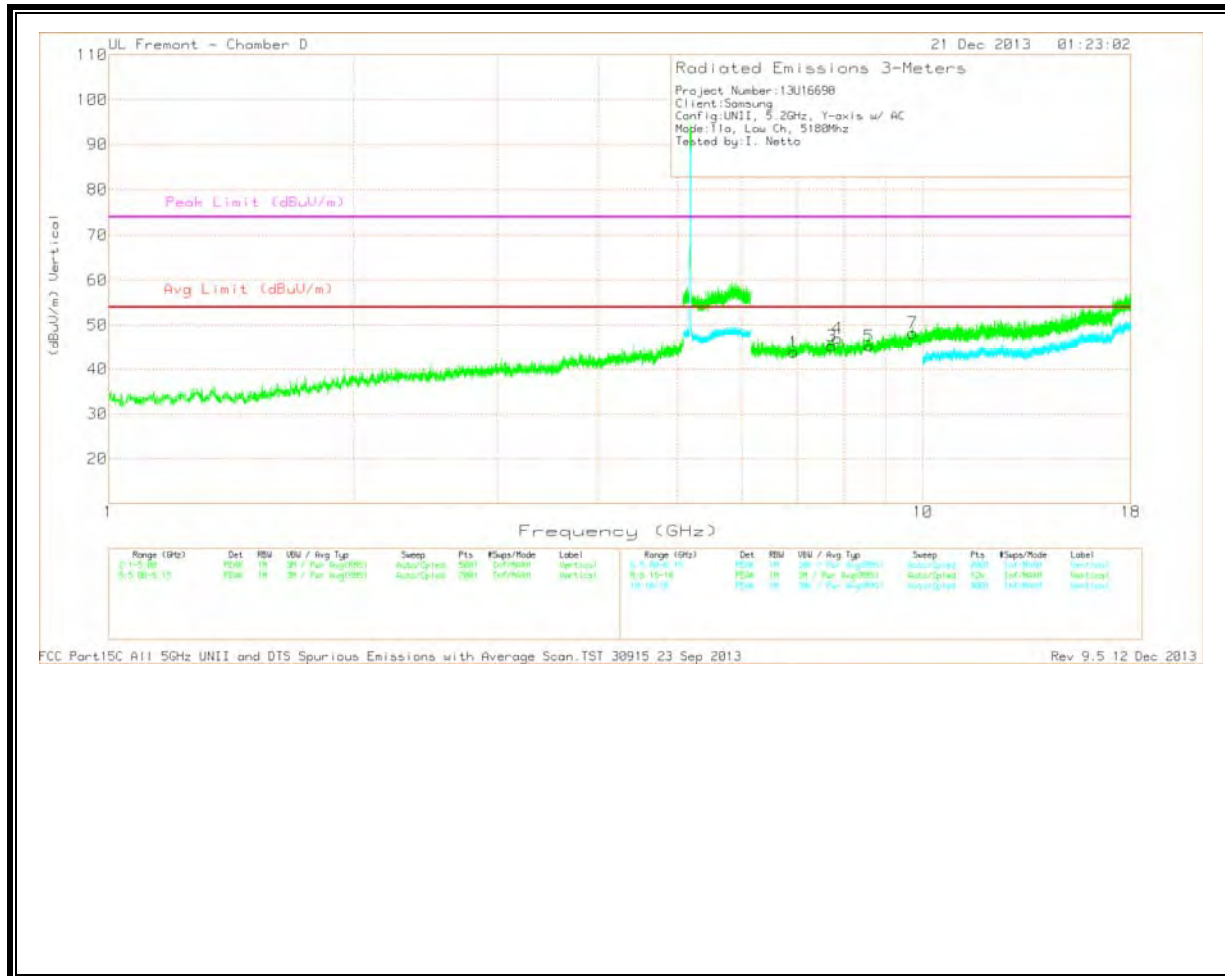


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (db/m)	Amp/Cbl/F ltr/Pad	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	6.943	33.76	PK	35.9	-25.8	43.86	53.97	-10.11	74	-30.14	0-360	100	V
2	7.162	35.89	PK	35.9	-24.4	47.39	53.97	-6.58	74	-26.61	0-360	201	H
3	7.728	34.14	PK	36.1	-24.9	45.34	53.97	-8.63	74	-28.66	0-360	201	V
4	7.858	36.22	PK	36.1	-25.3	47.02	53.97	-6.95	74	-26.98	0-360	201	V
5	8.596	32.8	PK	36.3	-23.8	45.3	53.97	-8.67	74	-28.7	0-360	100	V
6	9.166	32.14	PK	36.8	-22.9	46.04	53.97	-7.93	74	-27.96	0-360	201	H
7	9.714	32.92	PK	37.4	-22.1	48.22	53.97	-5.75	74	-25.78	0-360	201	V

MID CHANNEL
HORIZONTAL

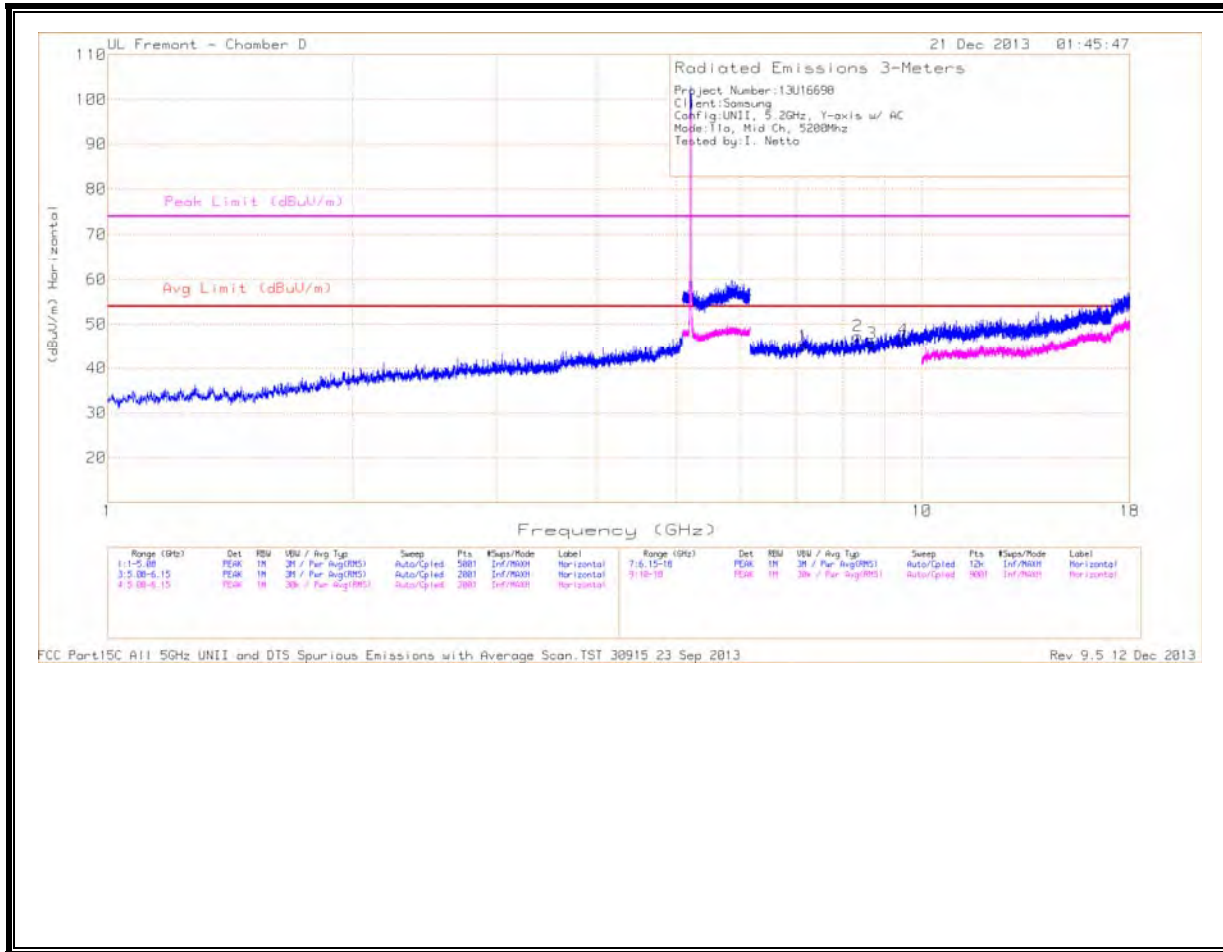

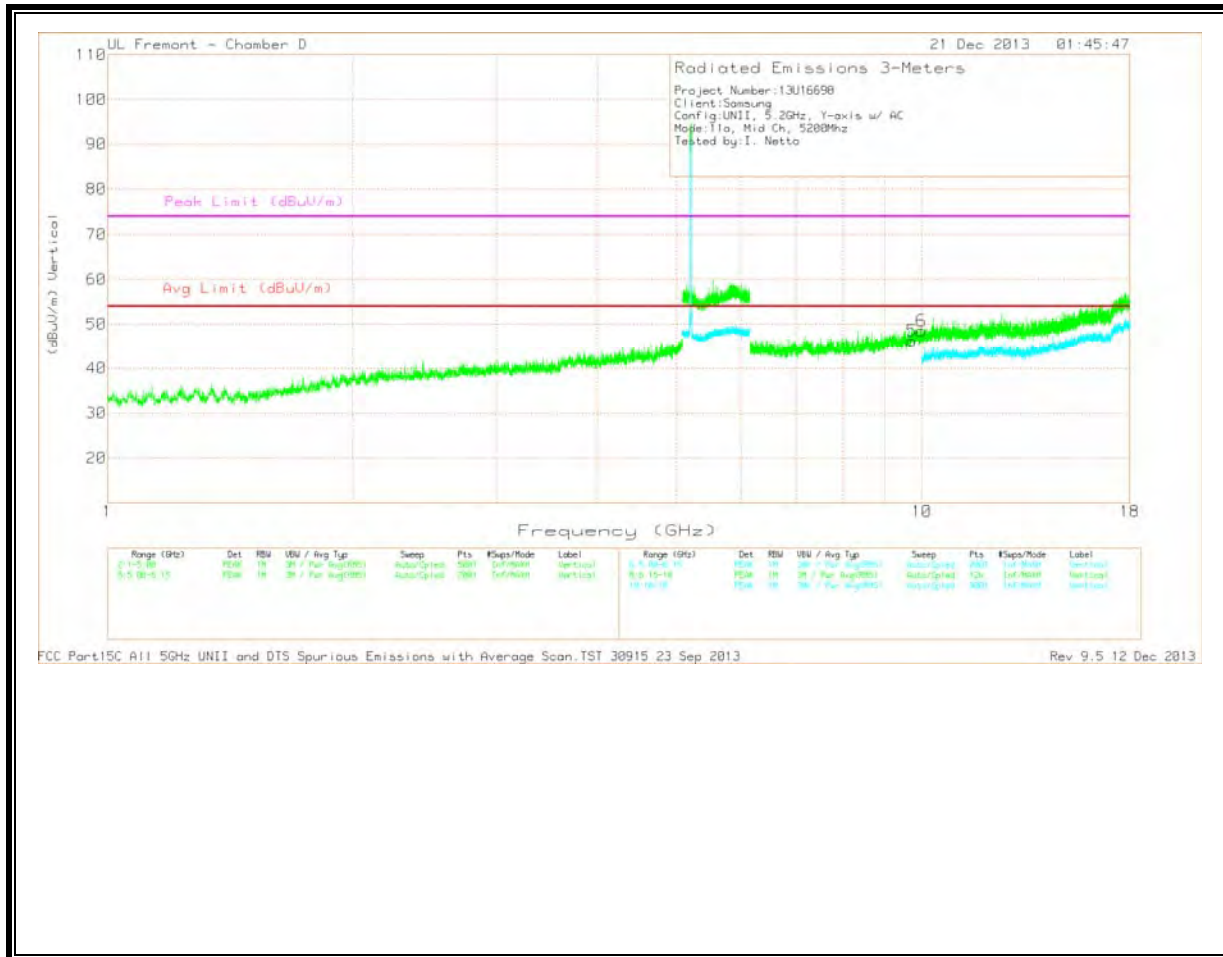



MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (db/m)	Amp/Cbl/F ltr/Pad	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.147	33.88	PK	35.9	-24.7	45.08	53.97	-8.89	74	-28.92	0-360	201	H
2	8.344	35.95	PK	36.1	-24.7	47.35	53.97	-6.62	74	-26.65	0-360	201	H
3	8.682	33.64	PK	36.3	-24.3	45.64	53.97	-8.33	74	-28.36	0-360	100	H
4	9.495	32.11	PK	37.2	-22.8	46.51	53.97	-7.46	74	-27.49	0-360	100	H
5	9.723	31.14	PK	37.4	-22.3	46.24	53.97	-7.73	74	-27.76	0-360	100	V
6	9.987	32.97	PK	37.9	-22.4	48.47	53.97	-5.5	74	-25.53	0-360	201	V

HIGH CHANNEL
HORIZONTAL

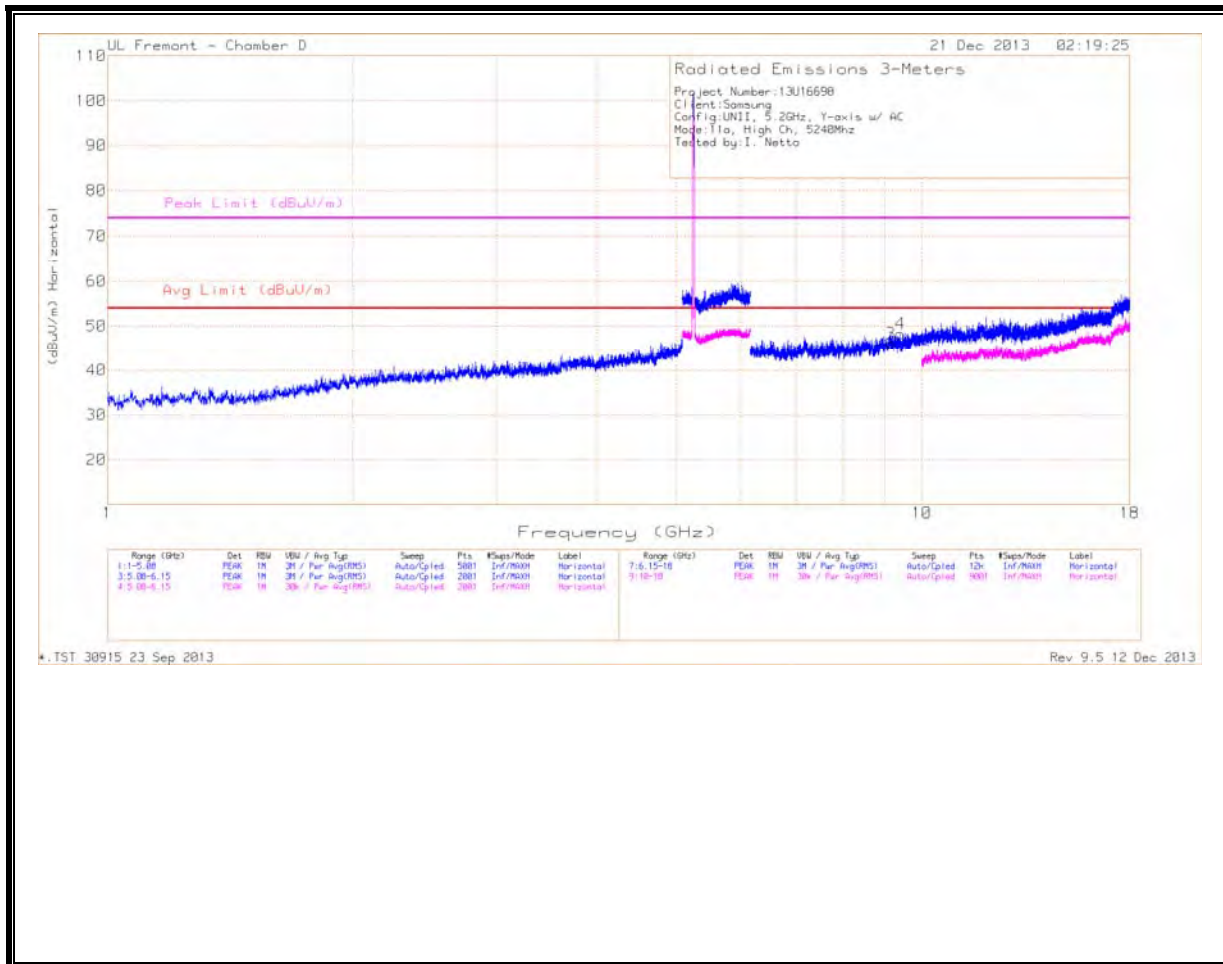



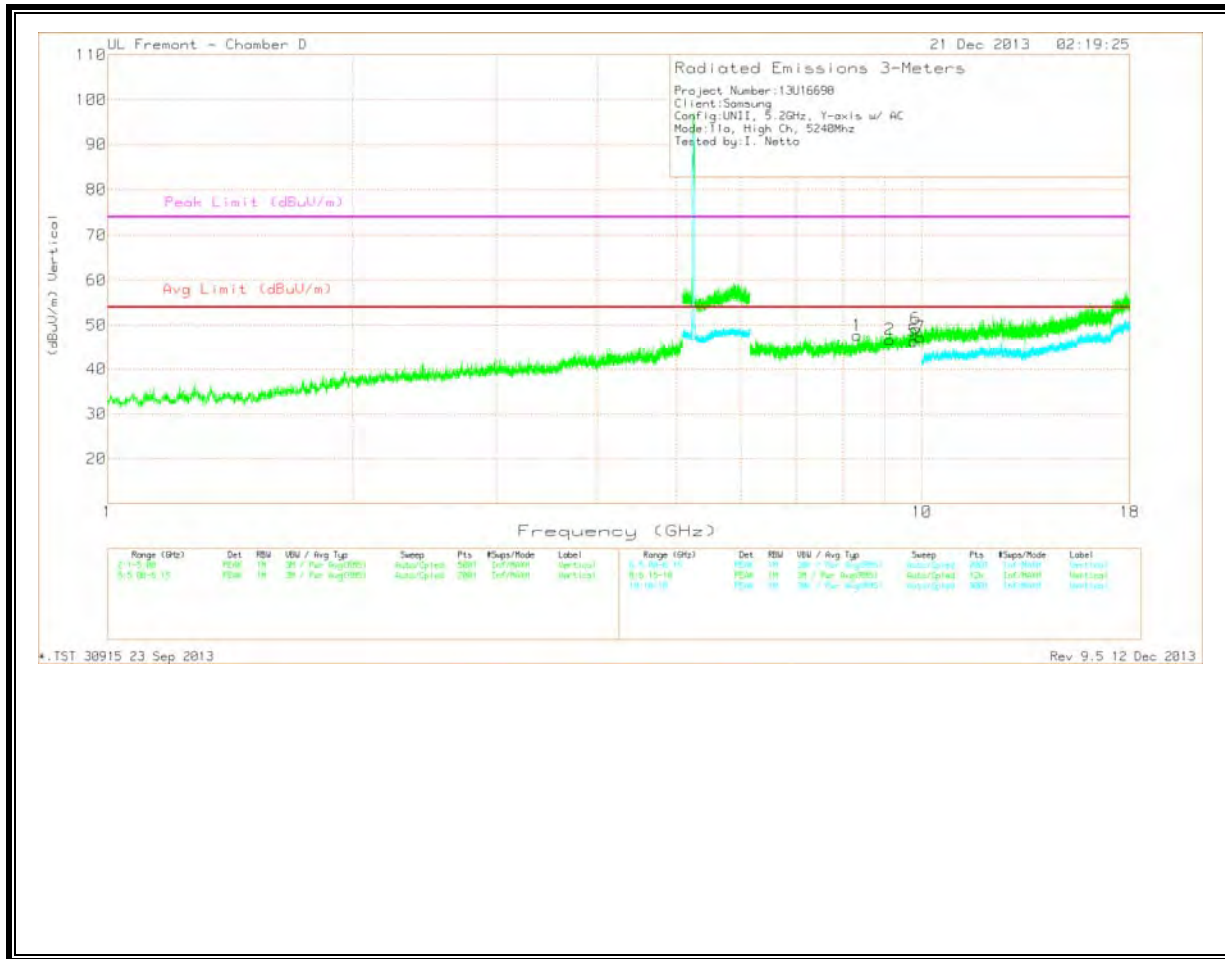


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (db/m)	Amp/Cbl/F ltr/Pad	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	8.334	36.2	PK	36.1	-24.6	47.7	53.97	-6.27	74	-26.3	0-360	201	V
2	9.135	32.81	PK	36.8	-22.8	46.81	53.97	-7.16	74	-27.19	0-360	201	V
3	9.158	32.06	PK	36.8	-22.8	46.06	53.97	-7.91	74	-27.94	0-360	201	H
4	9.412	34.7	PK	37.1	-23.5	48.3	53.97	-5.67	74	-25.7	0-360	100	H
5	9.772	31.33	PK	37.4	-22.3	46.43	53.97	-7.54	74	-27.57	0-360	100	V
6	9.831	33.83	PK	37.6	-22.2	49.23	53.97	-4.74	74	-24.77	0-360	201	V
7	9.955	31.78	PK	37.8	-22.3	47.28	53.97	-6.69	74	-26.72	0-360	201	V


**11.1.2. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.2 GHz BAND
 RESTRICTED BANDEDGE (LOW CHANNEL)**

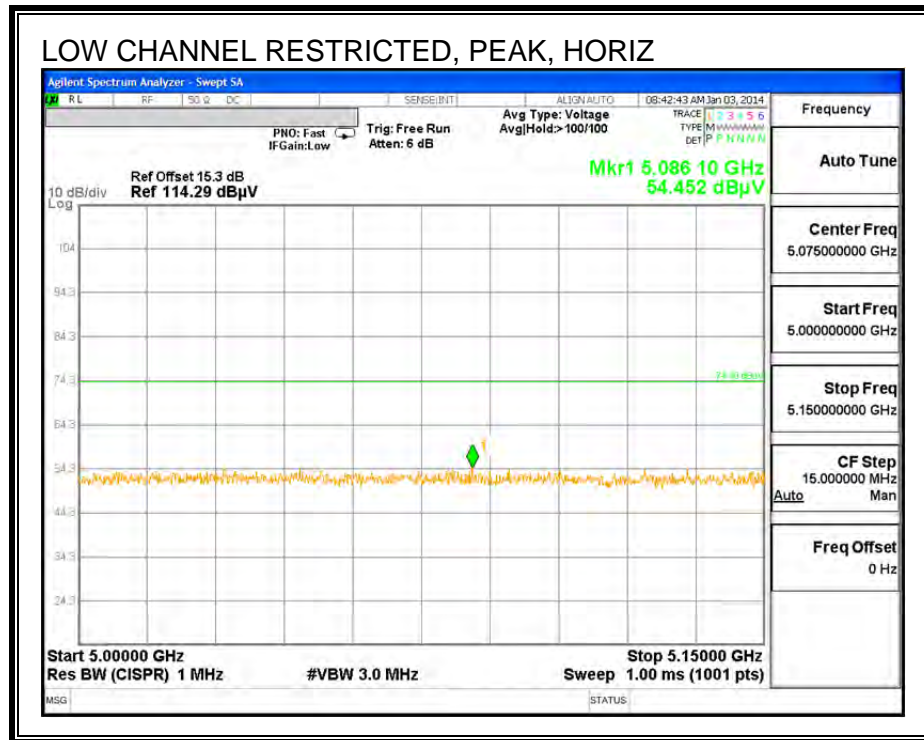


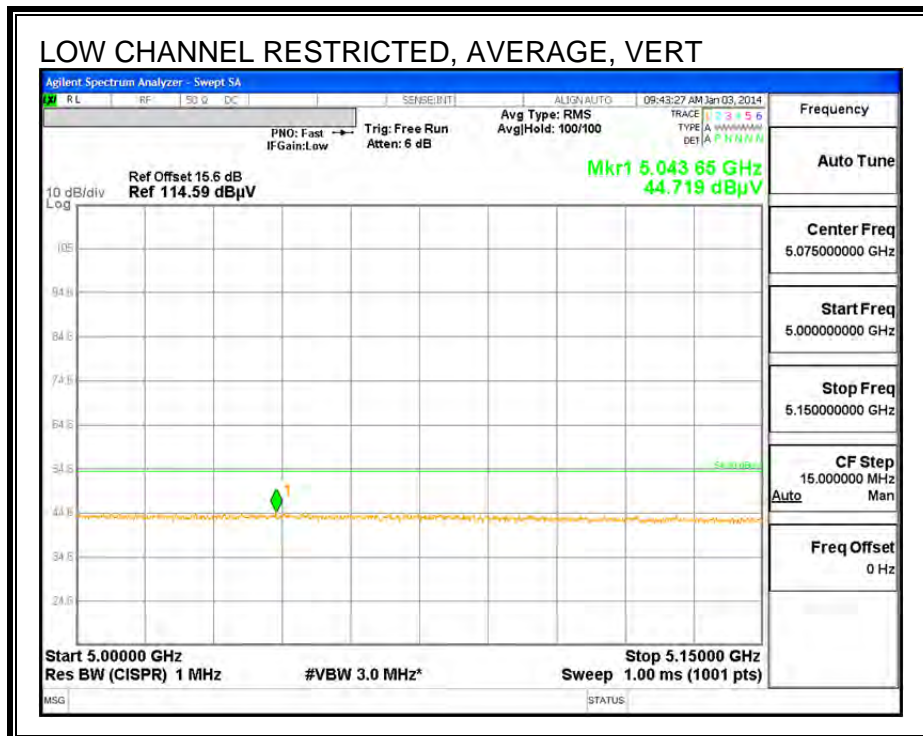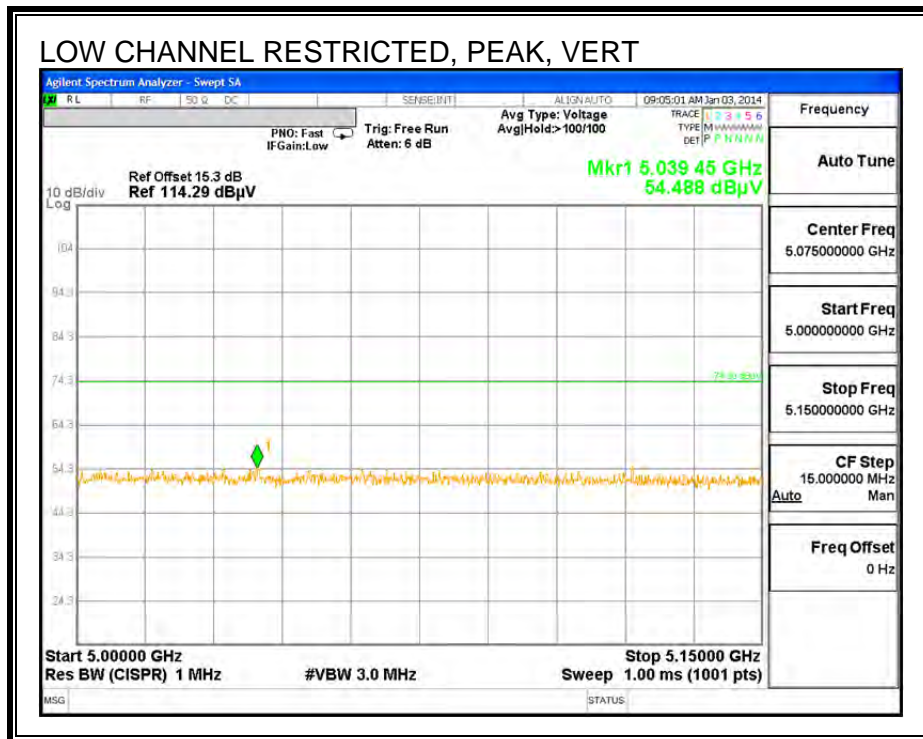

HARMONICS AND SPURIOUS EMISSIONS

**LOW CHANNEL
 HORIZONTAL**

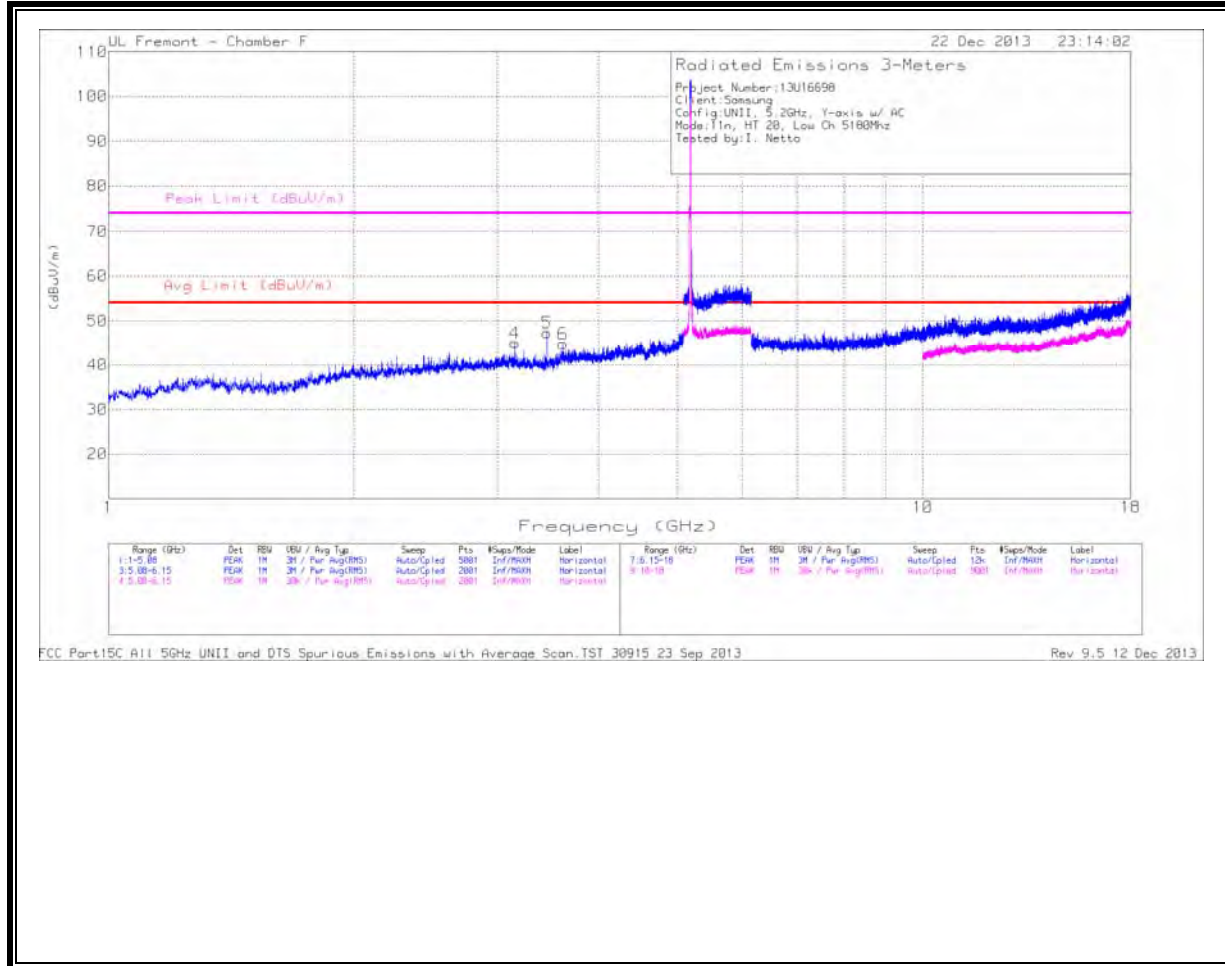


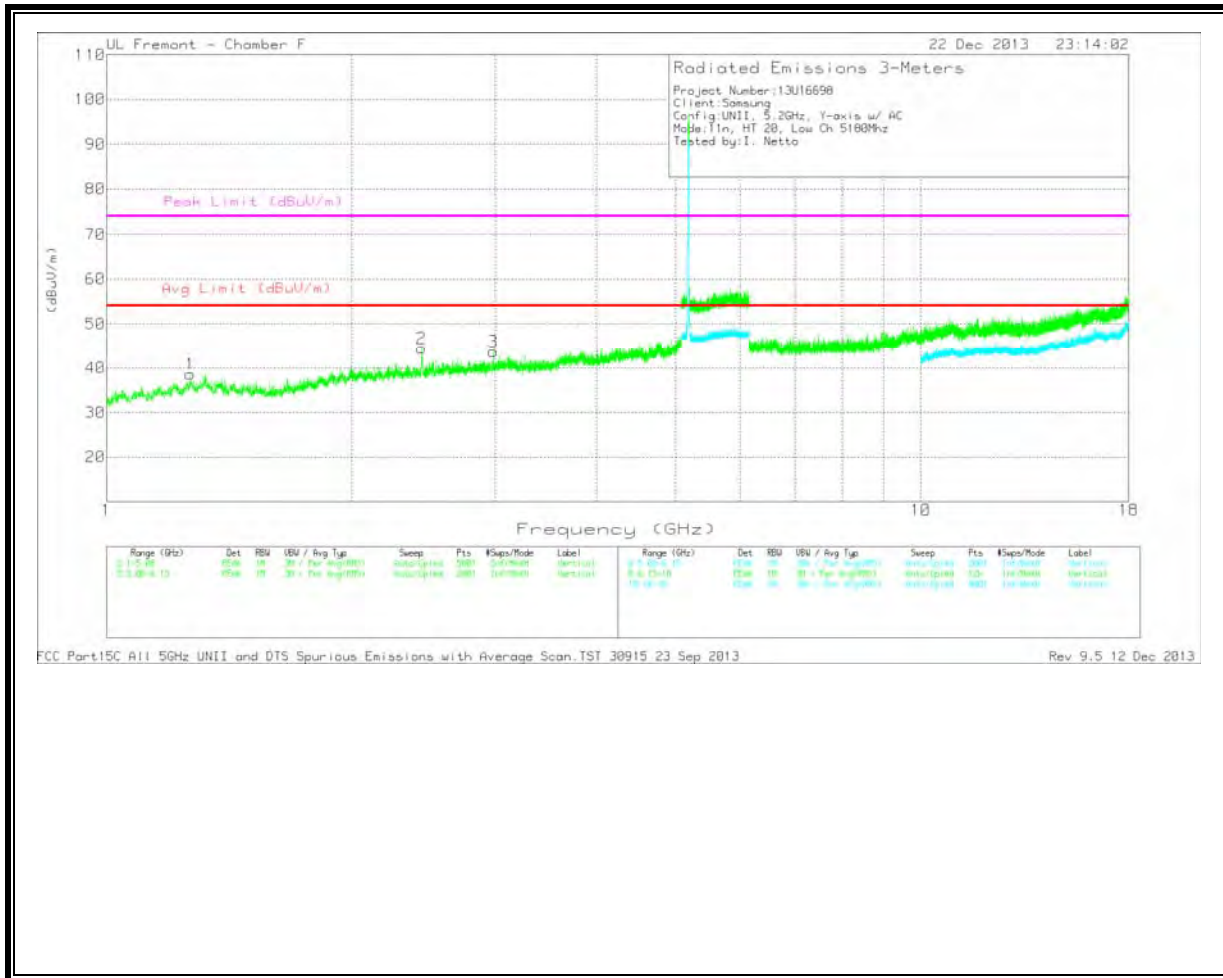


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/5 GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.267	40.84	PK	29.8	-32	38.64	53.97	-15.33	74	-35.36	0-360	201	V
2	2.436	42.87	PK	32.3	-30.7	44.47	53.97	-9.5	74	-29.53	0-360	201	V
3	2.985	40.82	PK	33.1	-30.2	43.72	53.97	-10.25	74	-30.28	0-360	201	V
4	3.155	41.49	PK	33.3	-29.8	44.99	53.97	-8.98	74	-29.01	0-360	199	H
5	3.455	43.83	PK	33.1	-29.6	47.33	53.97	-6.64	74	-26.67	0-360	199	H
6	3.614	40.41	PK	33.7	-29.3	44.81	53.97	-9.16	74	-29.19	0-360	199	H

MID CHANNEL
HORIZONTAL

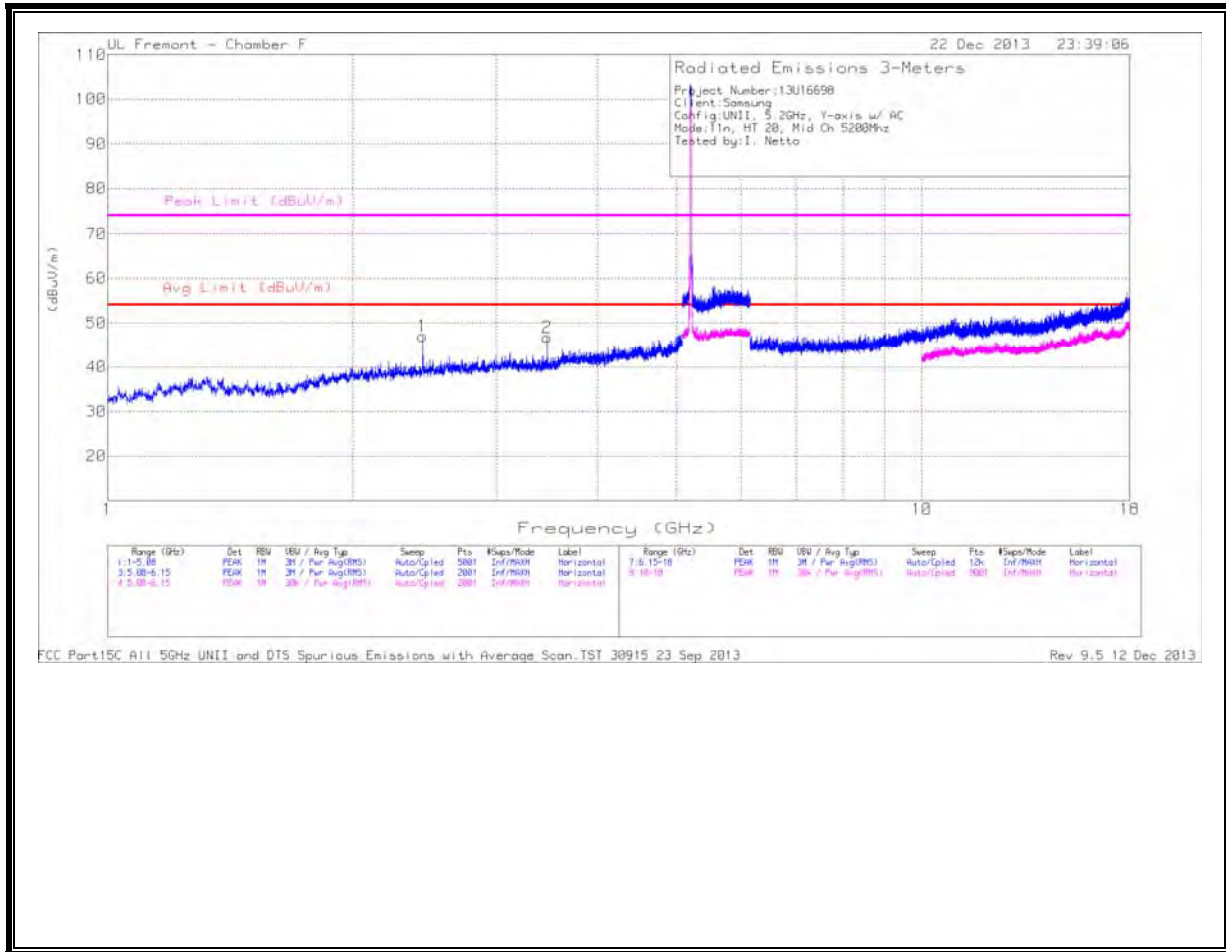

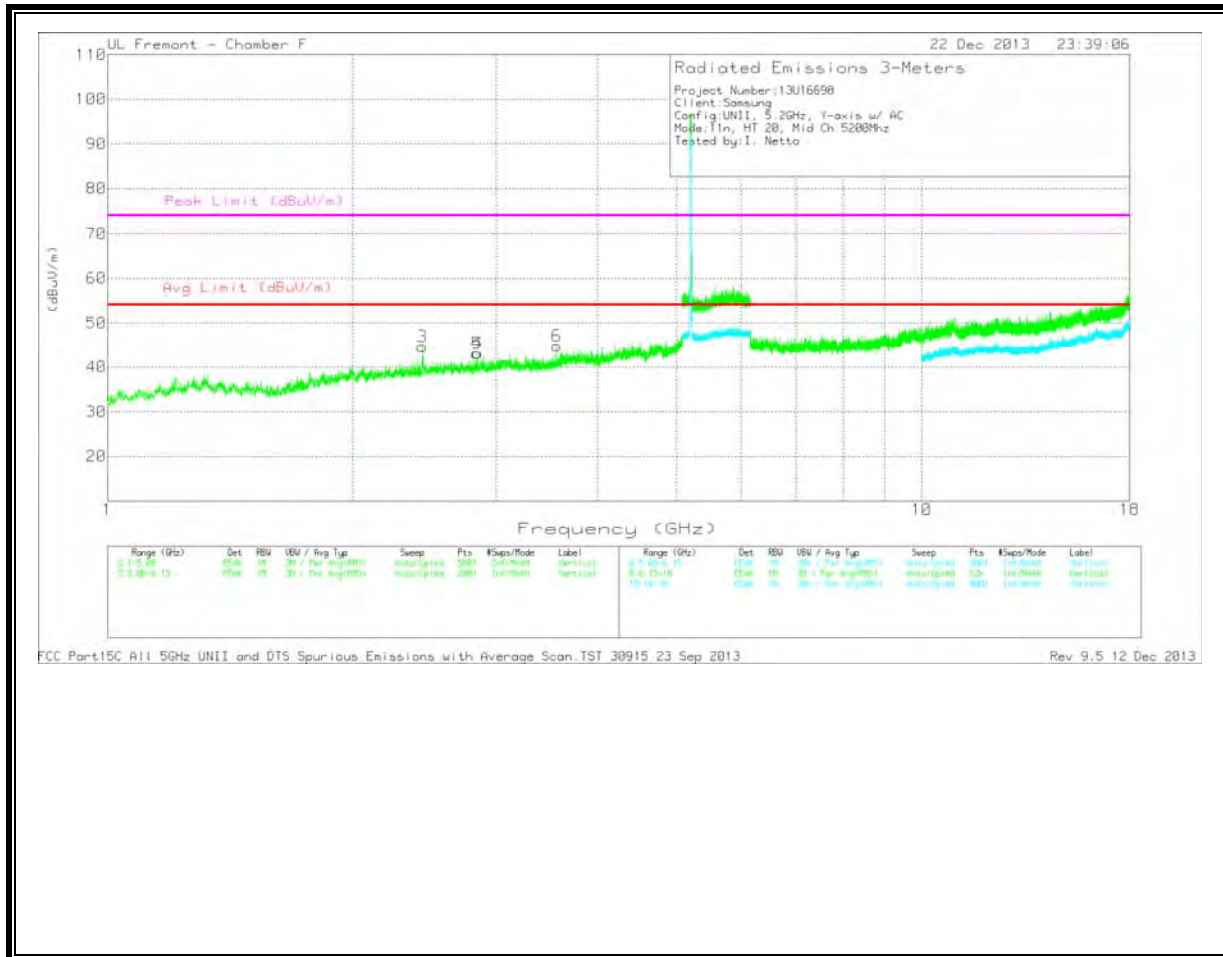



MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/5 GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	2.435	43.08	PK	32.3	-30.7	44.68	53.97	-9.29	74	-29.32	0-360	201	V
1	2.437	45.4	PK	32.3	-30.7	47	53.97	-6.97	74	-27	0-360	199	H
4	2.842	39.93	PK	32.8	-29.6	43.13	53.97	-10.84	74	-30.87	0-360	101	V
5	2.846	39.8	PK	32.8	-29.5	43.1	53.97	-10.87	74	-30.9	0-360	101	V
2	3.468	43.17	PK	33.1	-29.5	46.77	53.97	-7.2	74	-27.23	0-360	199	H
6	3.561	40.81	PK	33.5	-29.5	44.81	53.97	-9.16	74	-29.19	0-360	101	V

HIGH CHANNEL
HORIZONTAL

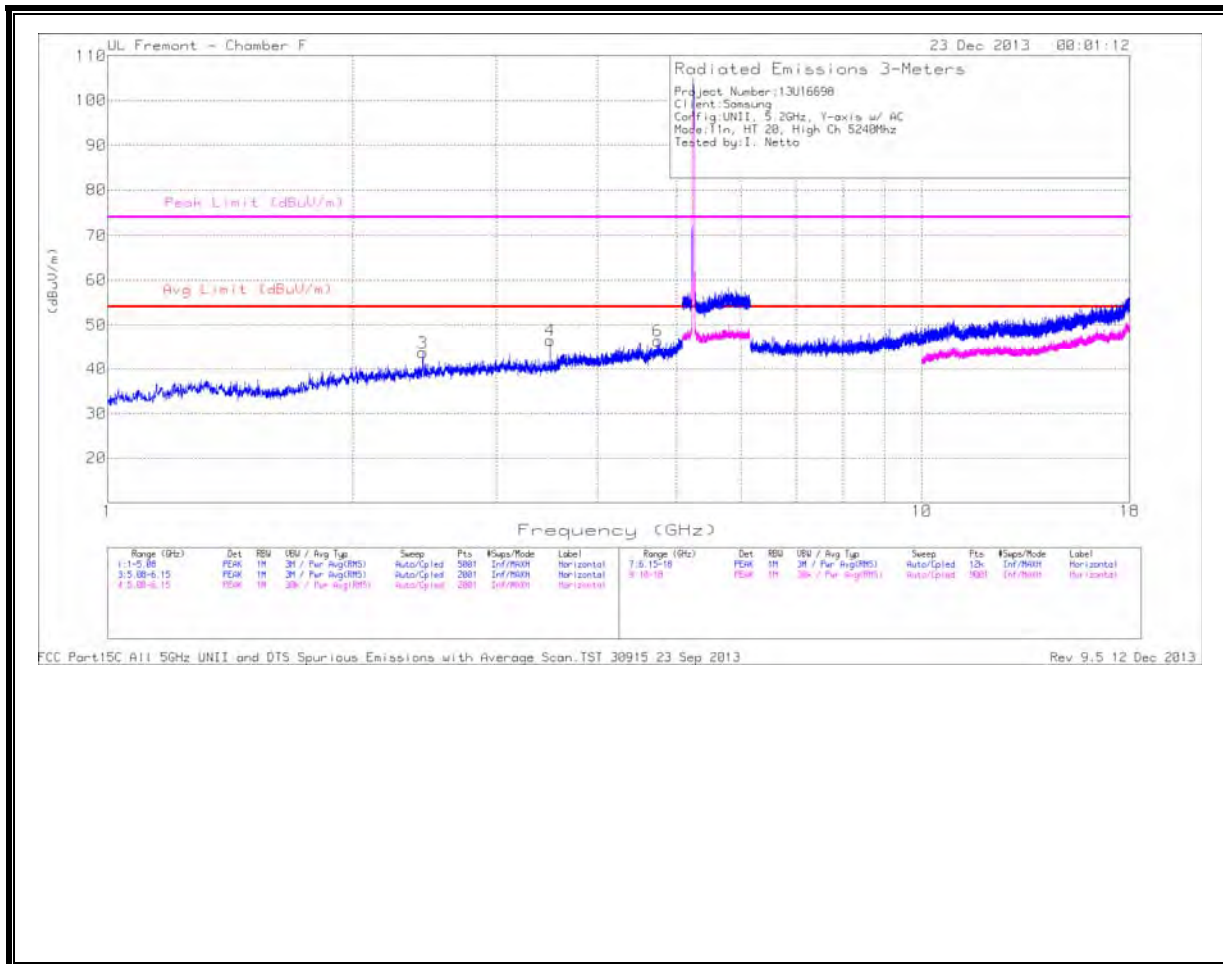



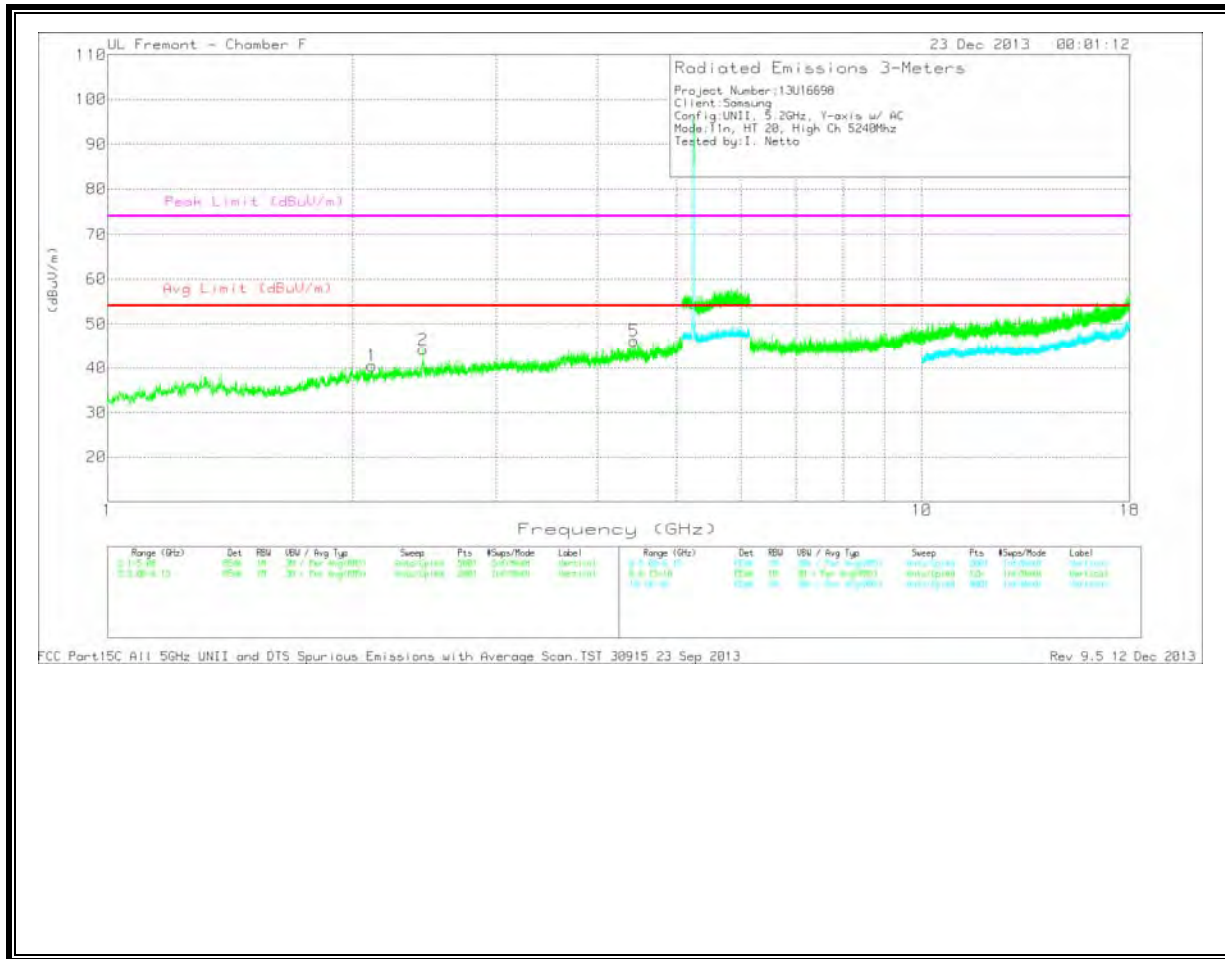


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/5 GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.111	39.88	PK	31.6	-31	40.48	53.97	-13.49	74	-33.52	0-360	201	V
3	2.439	42.11	PK	32.3	-30.7	43.71	53.97	-10.26	74	-30.29	0-360	200	H
2	2.44	42.58	PK	32.3	-30.7	44.18	53.97	-9.79	74	-29.82	0-360	101	V
4	3.495	42.86	PK	33.2	-29.5	46.56	53.97	-7.41	74	-27.44	0-360	200	H
5	4.431	40.09	PK	33.8	-27.7	46.19	53.97	-7.78	74	-27.81	0-360	201	V
6	4.741	40.03	PK	34.1	-27.7	46.43	53.97	-7.54	74	-27.57	0-360	200	H


11.1.3. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.2 GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

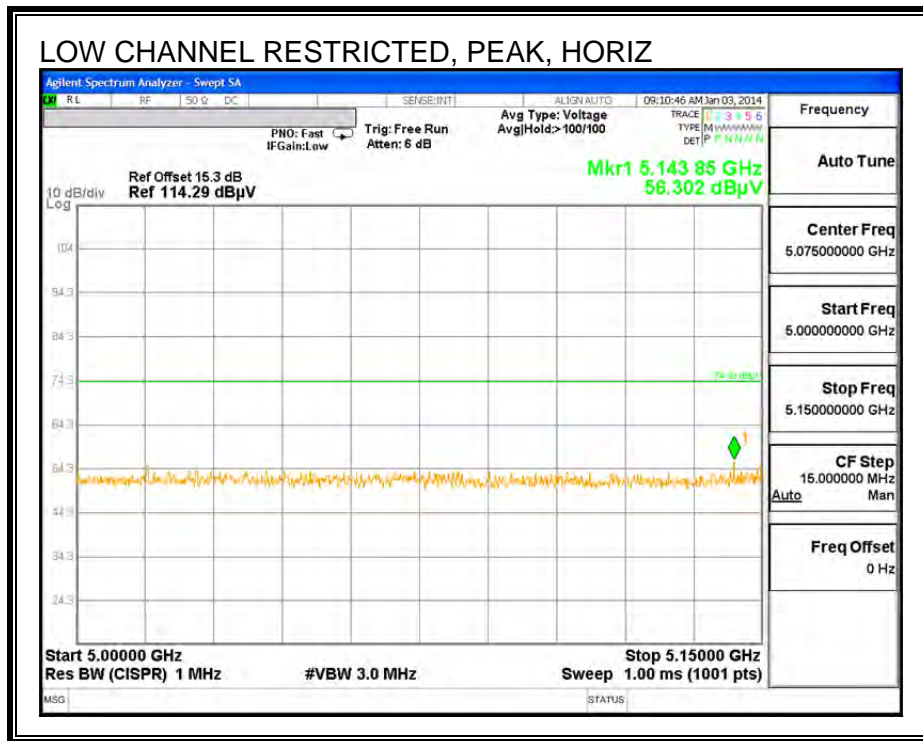


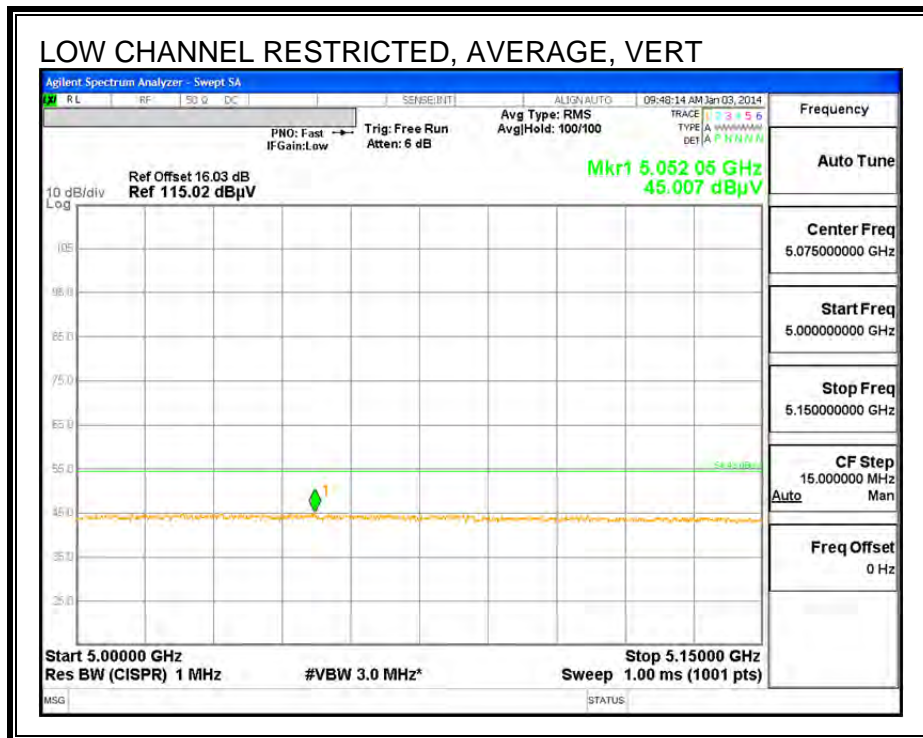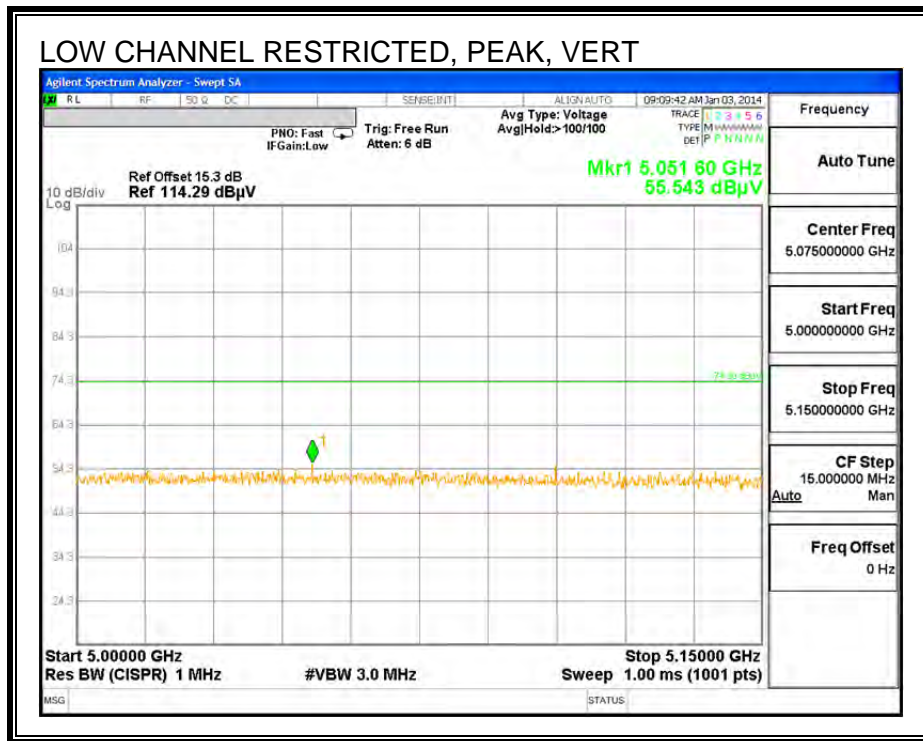

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL
 HORIZONTAL

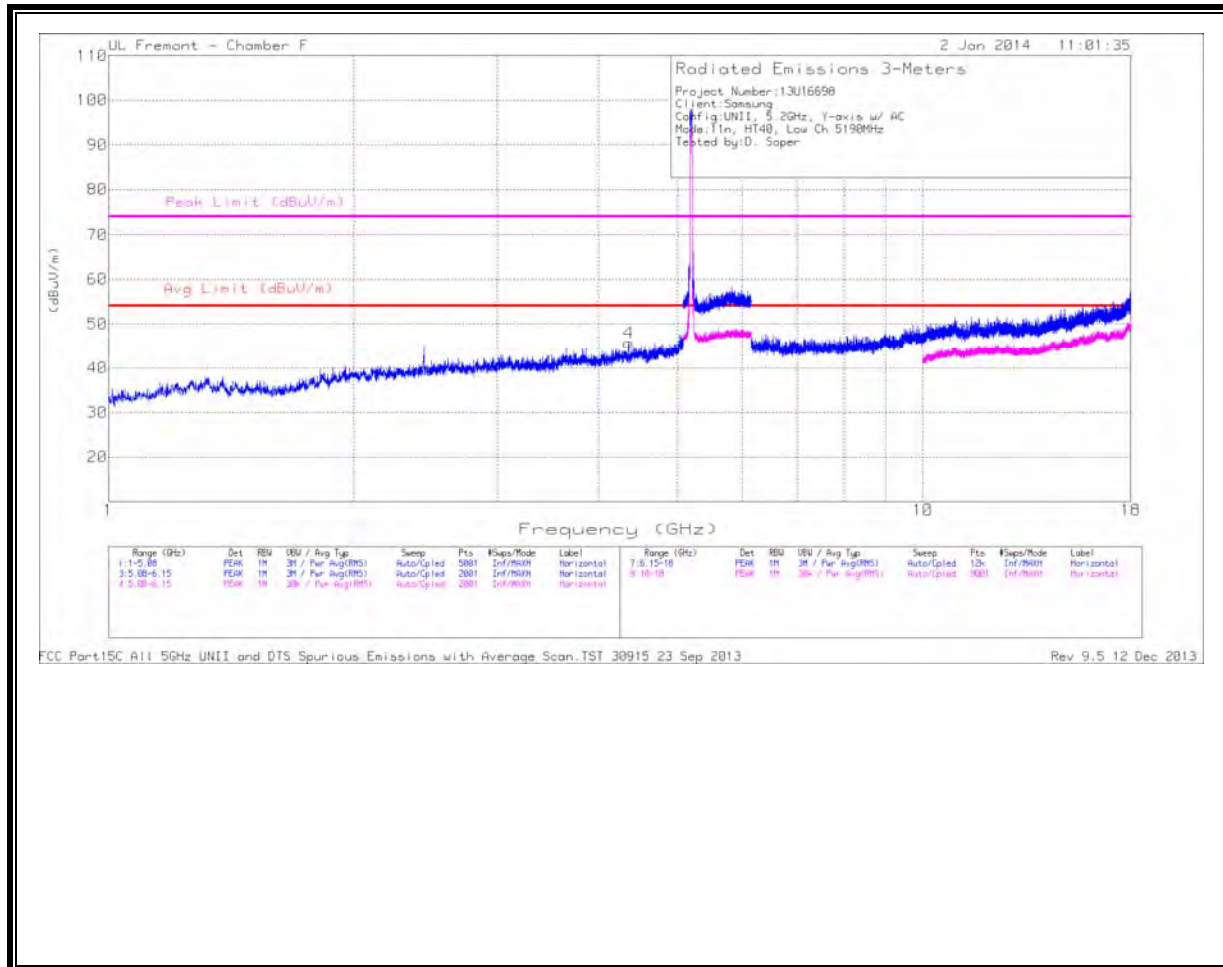

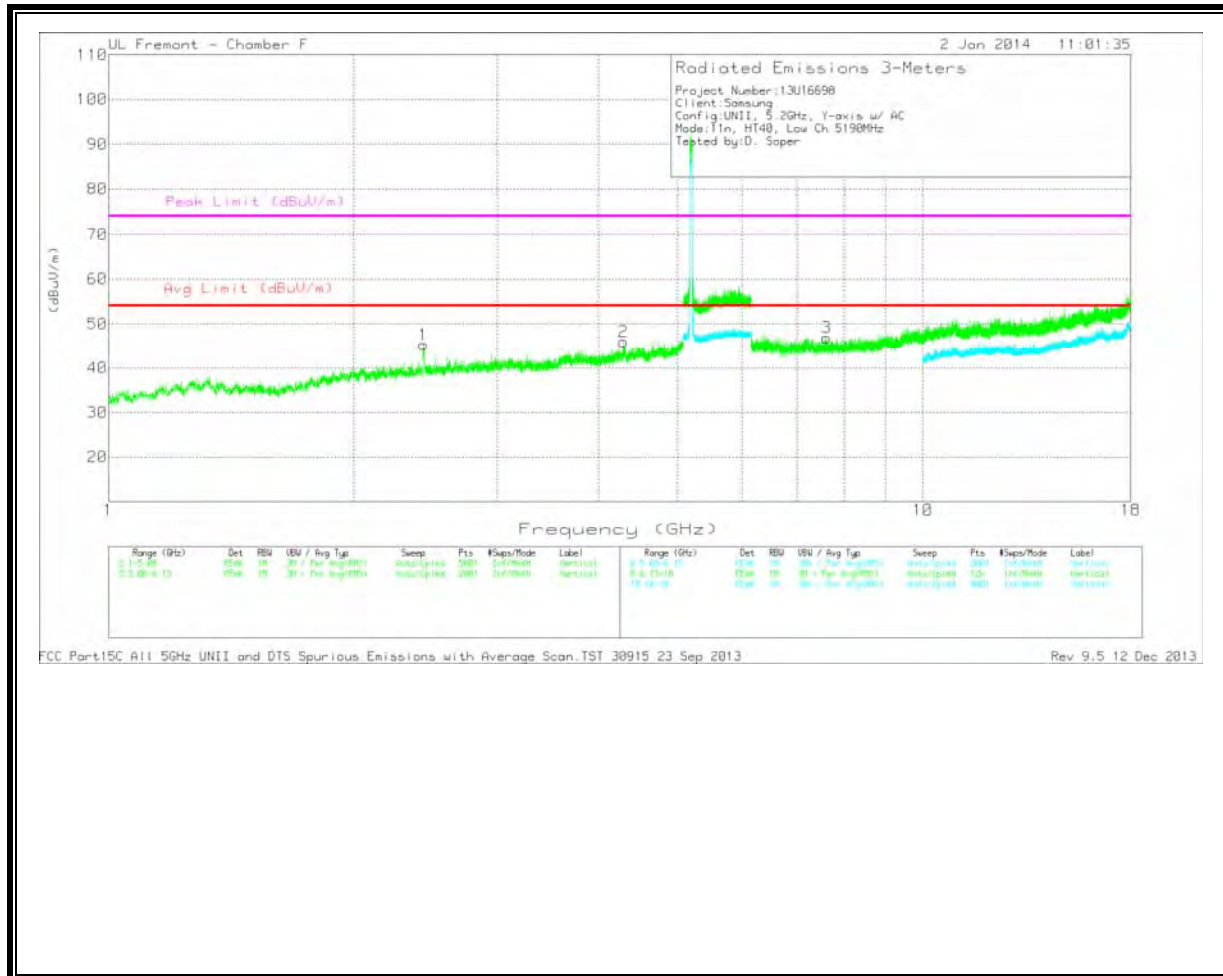


LOW CHANNEL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/5 GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.436	43.7	PK	32.3	-30.7	45.3	53.97	-8.67	74	-28.7	0-360	201	V
2	4.291	40.52	PK	33.5	-28	46.02	53.97	-7.95	74	-27.98	0-360	201	V
4	4.353	41.2	PK	33.6	-29.1	45.7	53.97	-8.27	74	-28.3	0-360	200	H

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/6 GHz HPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	7.62	37.06	PK	35.9	-26	46.96	53.97	-7.01	74	-27.04	0-360	101	V

HIGH CHANNEL
HORIZONTAL

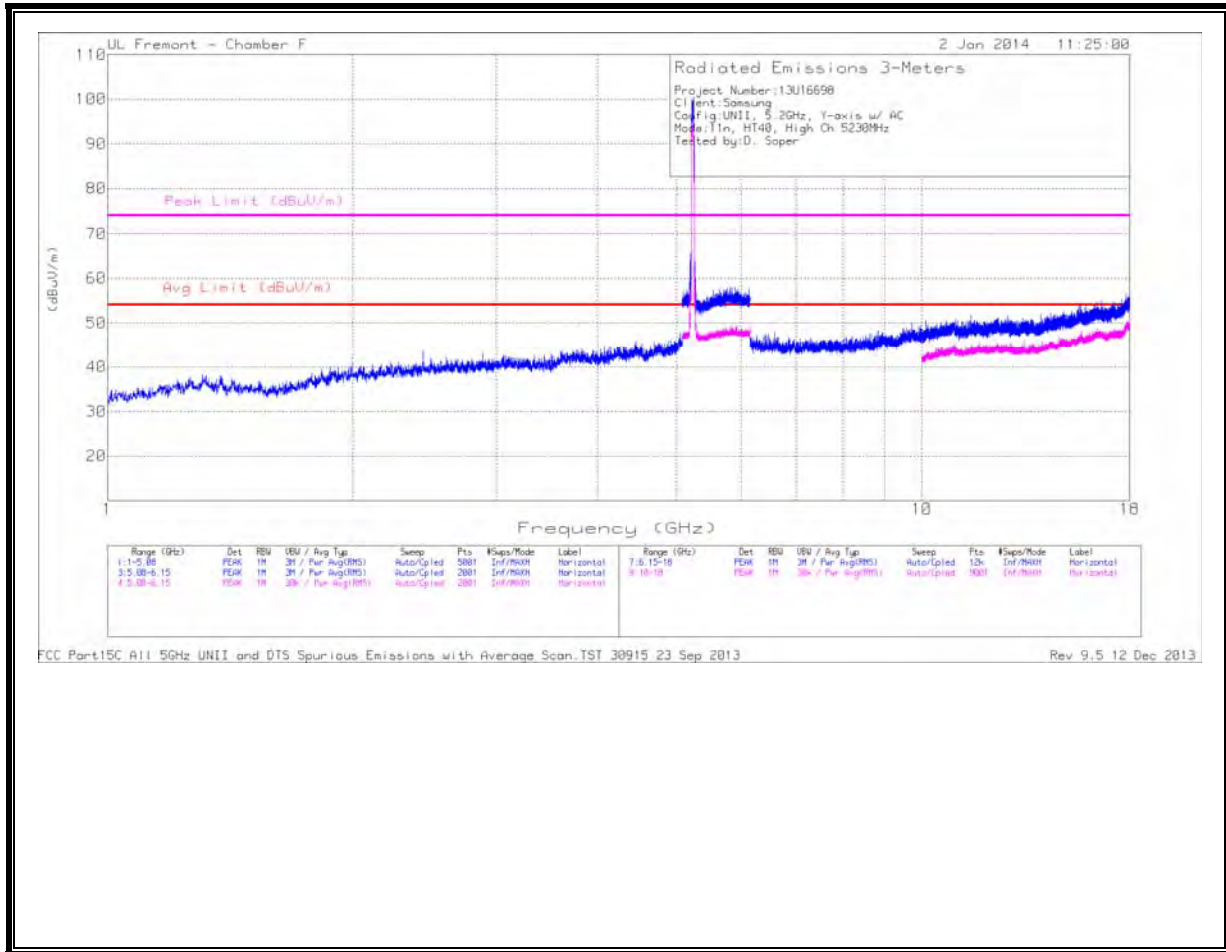

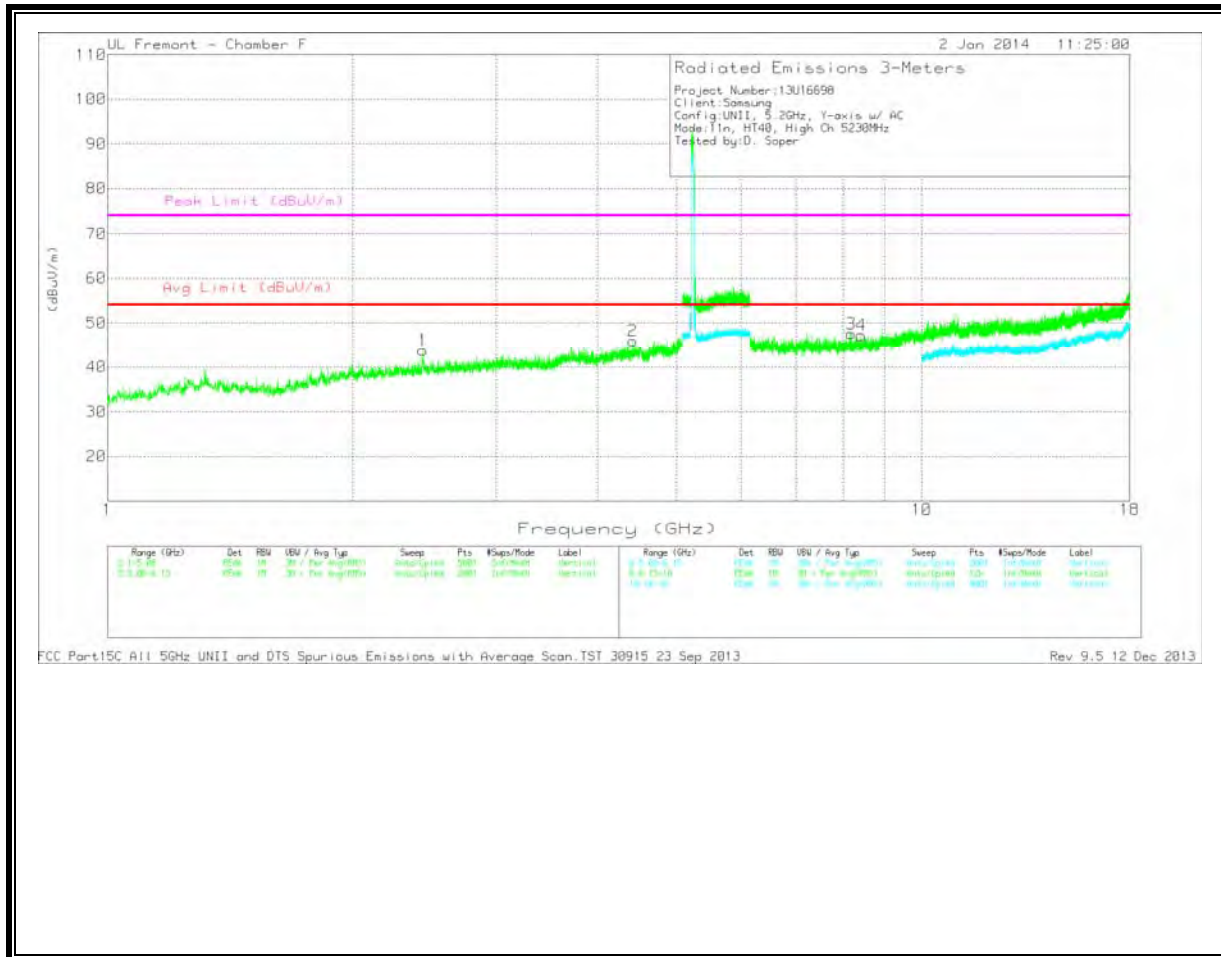



HIGH CHANNEL DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/5 GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.439	42.18	PK	32.3	-30.7	43.78	53.97	-10.19	74	-30.22	0-360	101	V
2	4.417	40.19	PK	33.7	-27.9	45.99	53.97	-7.98	74	-28.01	0-360	201	V

PK - Peak detector

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/6 GHz HPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	8.191	36.66	PK	36	-25.1	47.56	53.97	-6.41	74	-26.44	0-360	101	V
4	8.422	36.35	PK	36	-25.1	47.25	53.97	-6.72	74	-26.75	0-360	101	V


**11.1.4. TX ABOVE 1 GHz 802.11ac HT80 MODE IN THE 5.2 GHz BAND
 RESTRICTED BANDEGE (LOW CHANNEL)**

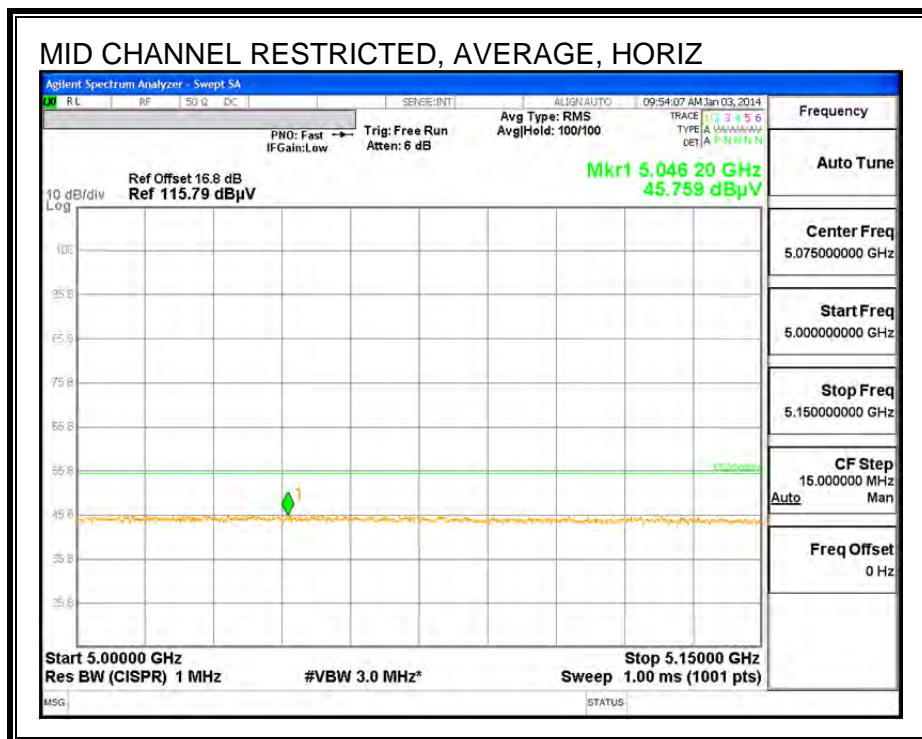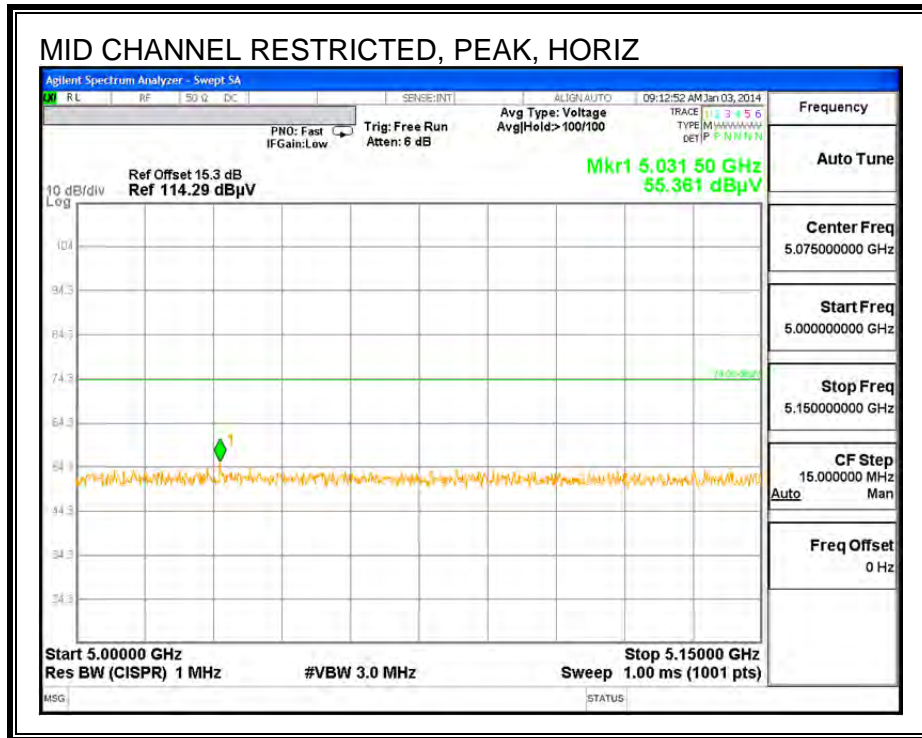


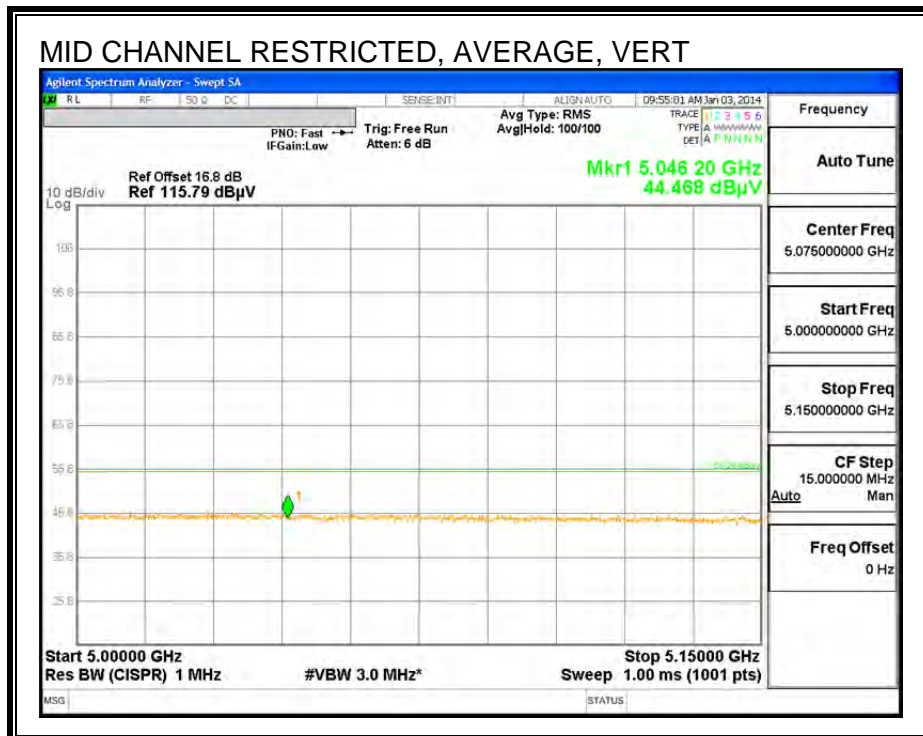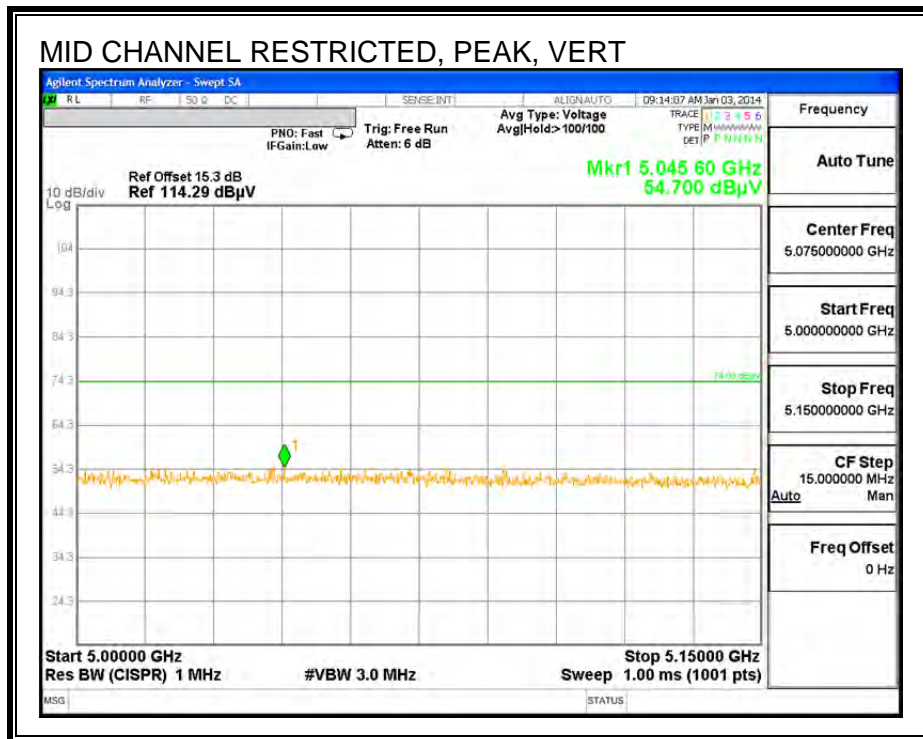

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL
 HORIZONTAL

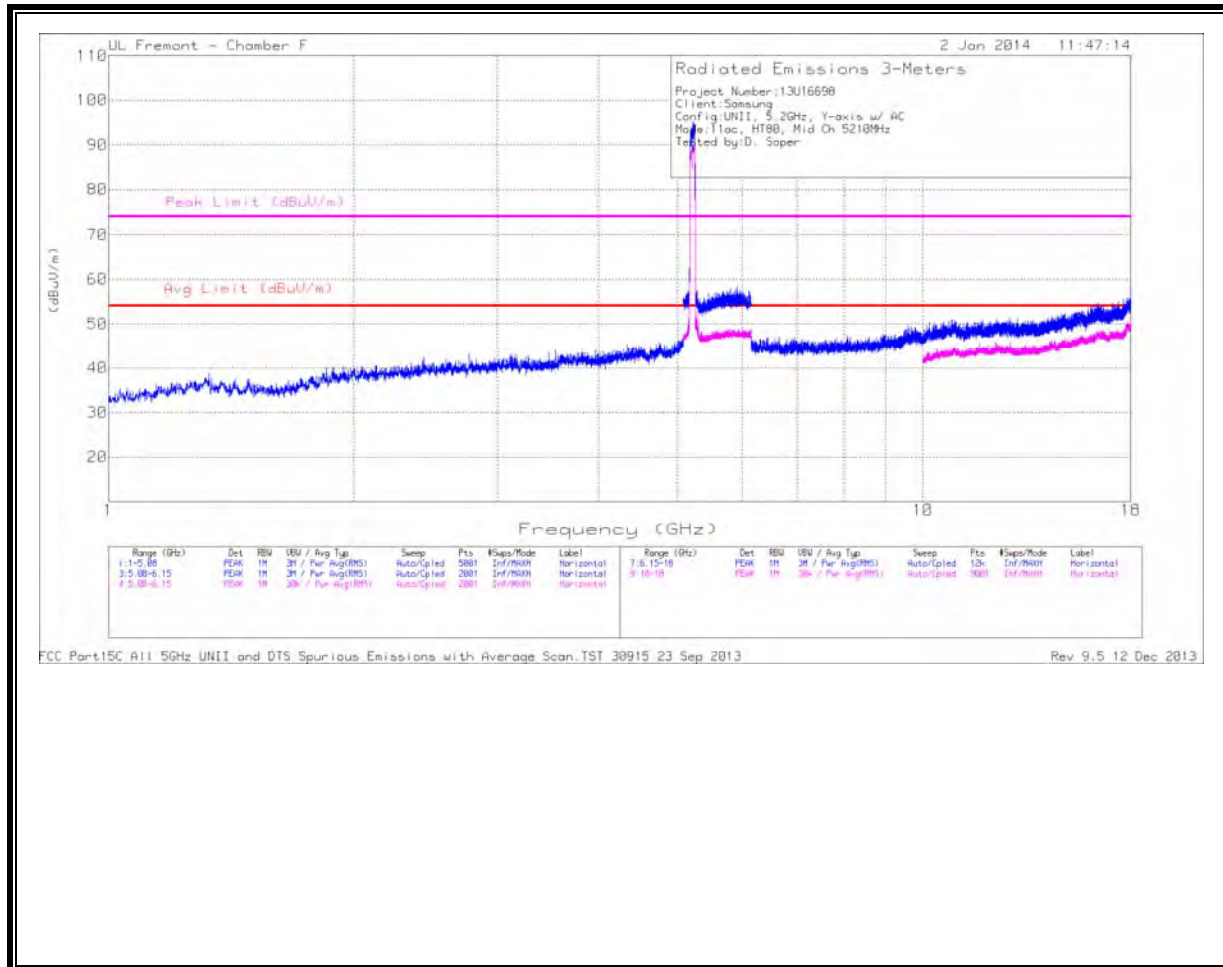

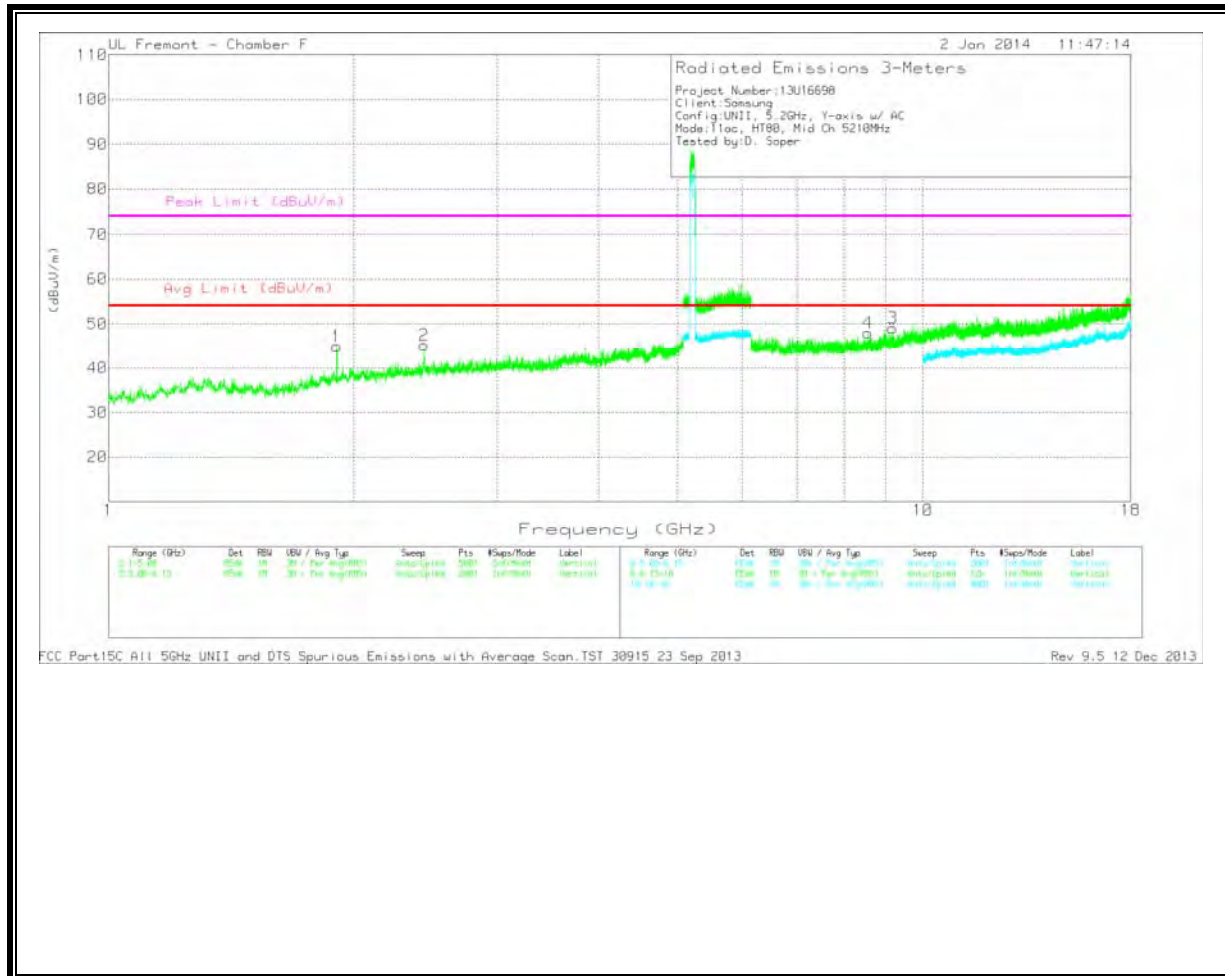

MID CHANNEL DATA

Trace Markers



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/5 GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.907	44.95	PK	31.2	-31.2	44.95	53.97	-9.02	74	-29.05	0-360	101	V
2	2.44	43.61	PK	32.3	-30.7	45.21	53.97	-8.76	74	-28.79	0-360	101	V



PK - Peak detector

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/6 GHz HPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	8.559	36.99	PK	36	-25	47.99	53.97	-5.98	74	-26.01	0-360	101	V
3	9.183	36.38	PK	36.5	-23.8	49.08	53.97	-4.89	74	-24.92	0-360	201	V

11.2. 5.3 GHz

11.2.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.3 GHz BAND AUTHORIZED BANDEDGE (HIGH CHANNEL)

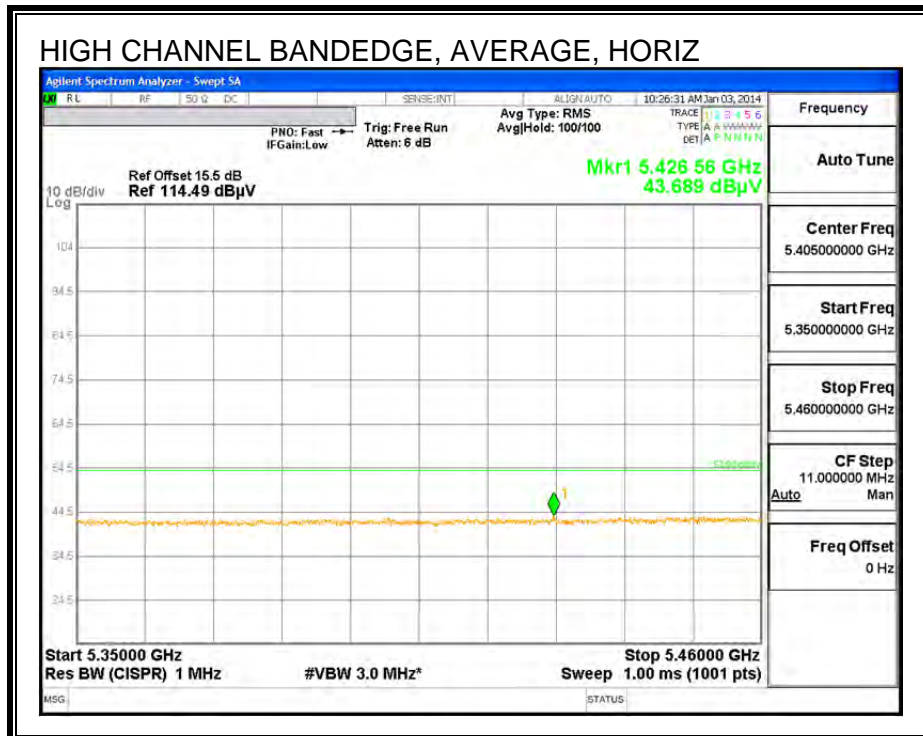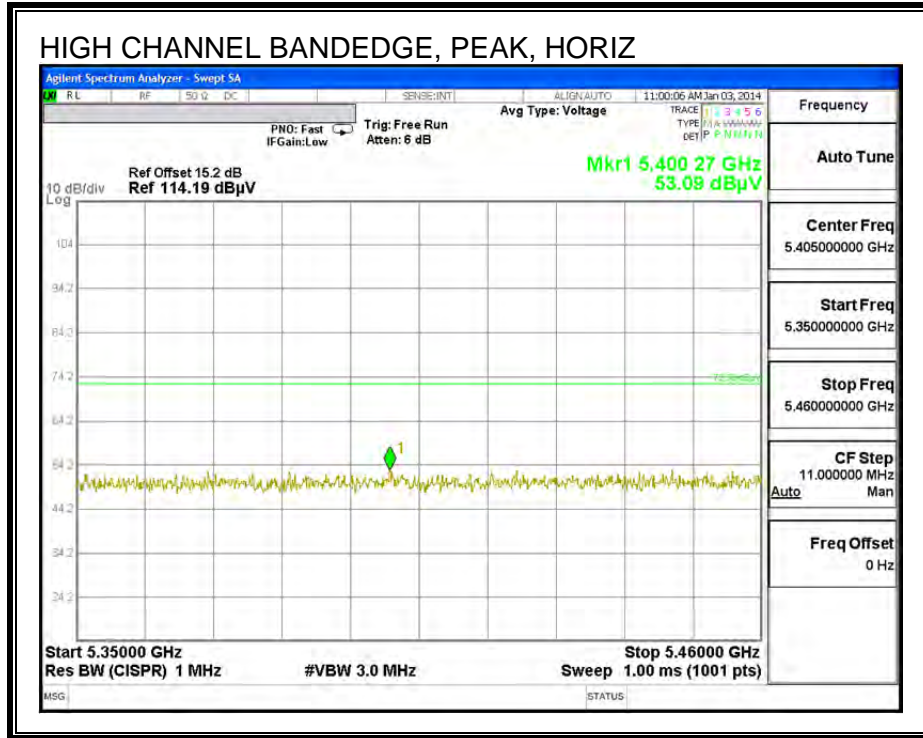


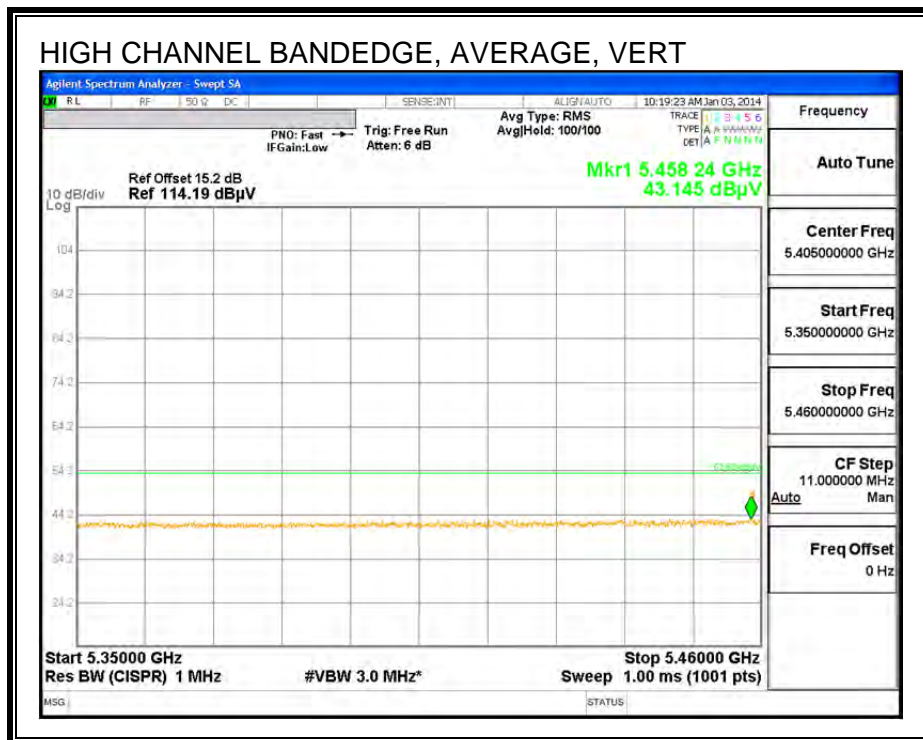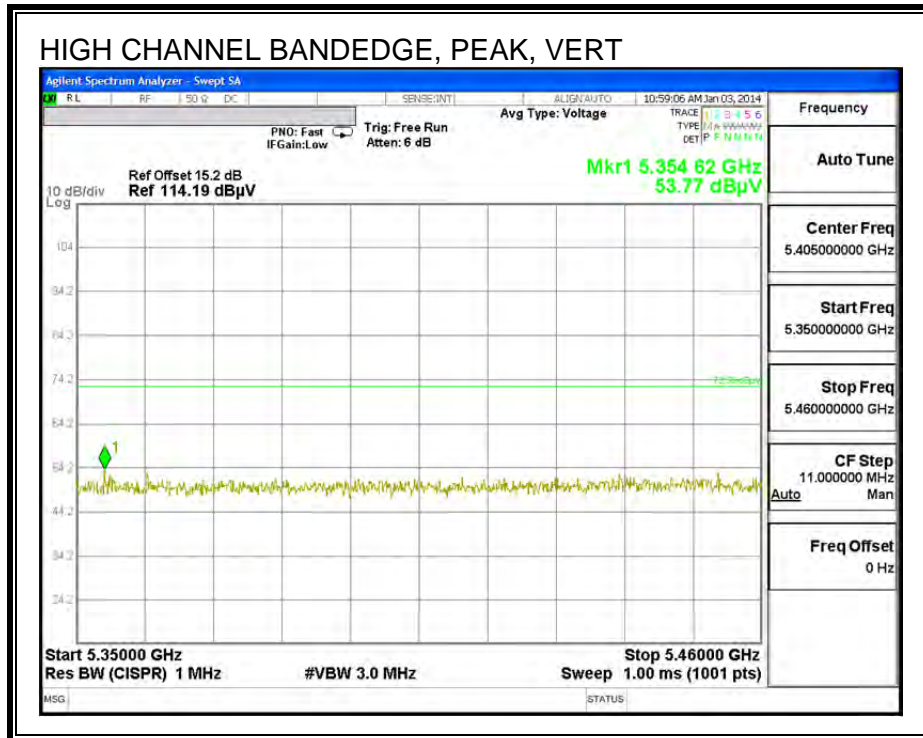

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL
 HORIZONTAL



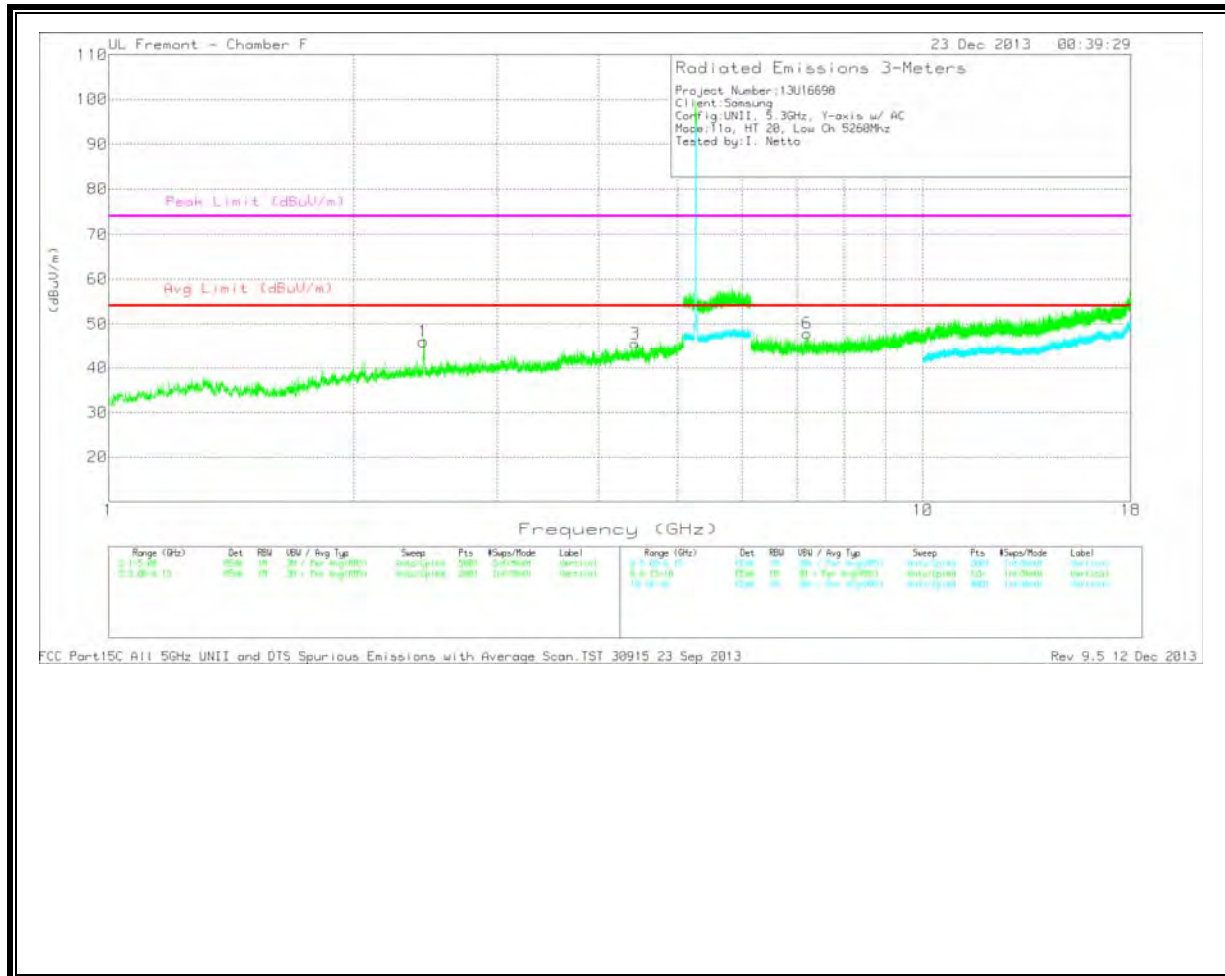

LOW CHANNEL DATA


Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/5 GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.435	44.45	PK	32.3	-30.7	46.05	53.97	-7.92	74	-27.95	0-360	101	V
2	3.508	41.23	PK	33.2	-29.5	44.93	53.97	-9.04	74	-29.07	0-360	199	H
3	4.432	39.44	PK	33.8	-27.7	45.54	53.97	-8.43	74	-28.46	0-360	101	V
4	4.822	41.83	PK	34	-28.4	47.43	53.97	-6.54	74	-26.57	0-360	199	H

PK - Peak detector

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/6 GHz HPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	7.163	38.5	PK	35.7	-26.6	47.6	53.97	-6.37	74	-26.4	0-360	199	H
6	7.213	37.99	PK	35.7	-25.8	47.89	53.97	-6.08	74	-26.11	0-360	201	V

MID CHANNEL
HORIZONTAL

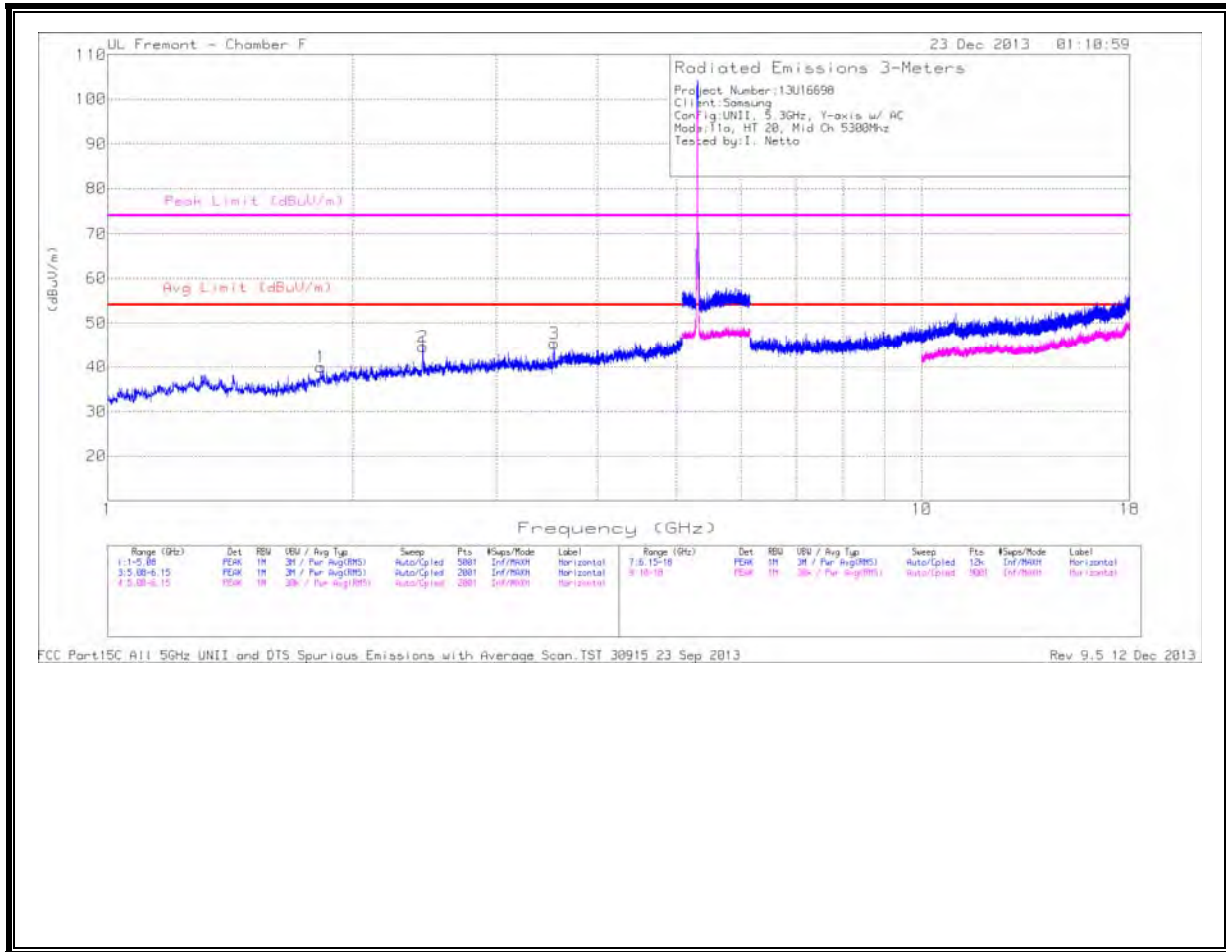

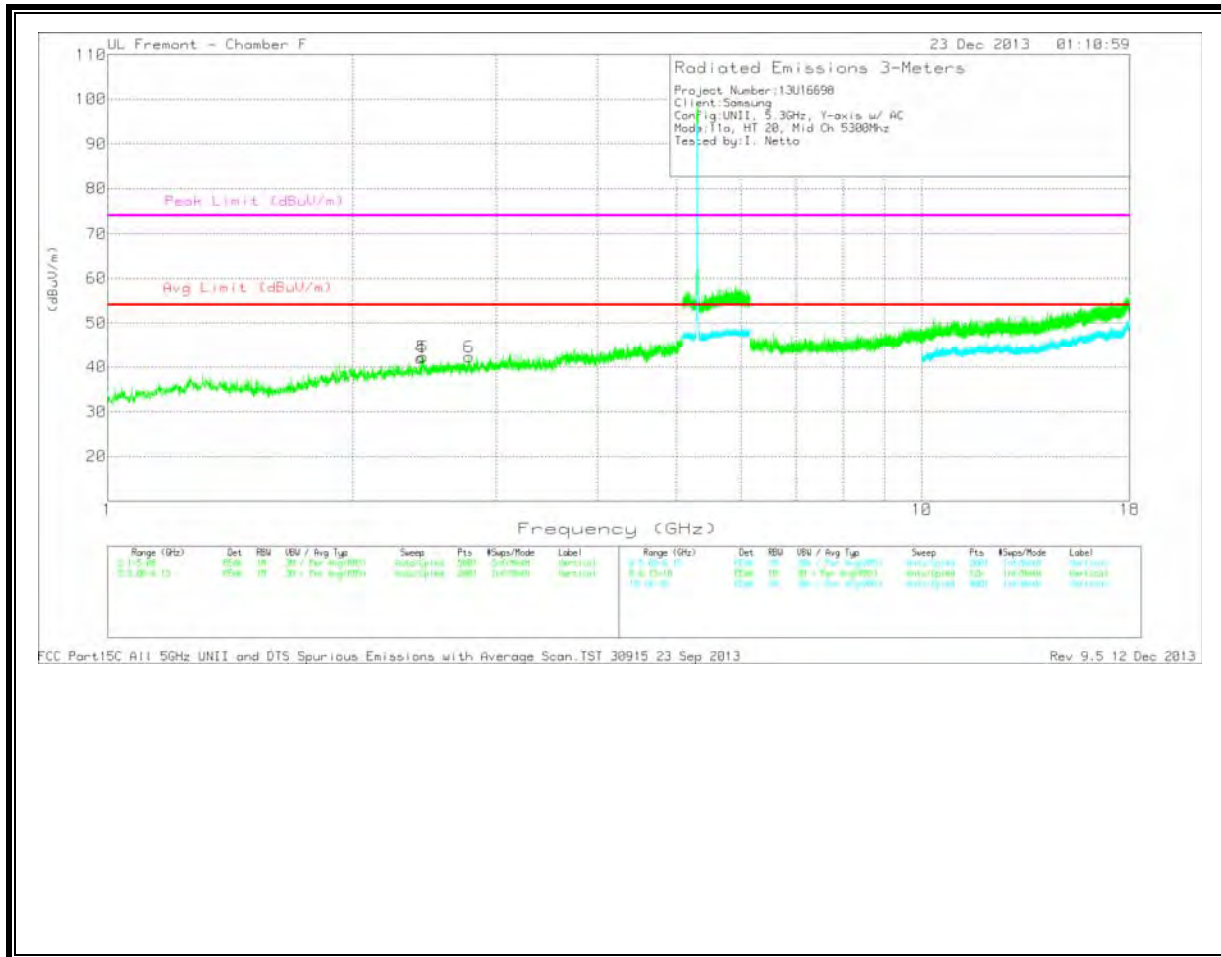



MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cb/5 GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.827	40.44	PK	30.4	-30.9	39.94	53.97	-14.03	74	-34.06	0-360	101	H
4	2.424	40.41	PK	32.2	-30.6	42.01	53.97	-11.96	74	-31.99	0-360	201	V
2	2.439	43.05	PK	32.3	-30.7	44.65	53.97	-9.32	74	-29.35	0-360	200	H
5	2.439	40.72	PK	32.3	-30.7	42.32	53.97	-11.65	74	-31.68	0-360	101	V
6	2.779	39.85	PK	32.7	-30.3	42.25	53.97	-11.72	74	-31.75	0-360	201	V
3	3.534	41.45	PK	33.4	-29.5	45.35	53.97	-8.62	74	-28.65	0-360	101	H

HIGH CHANNEL
HORIZONTAL


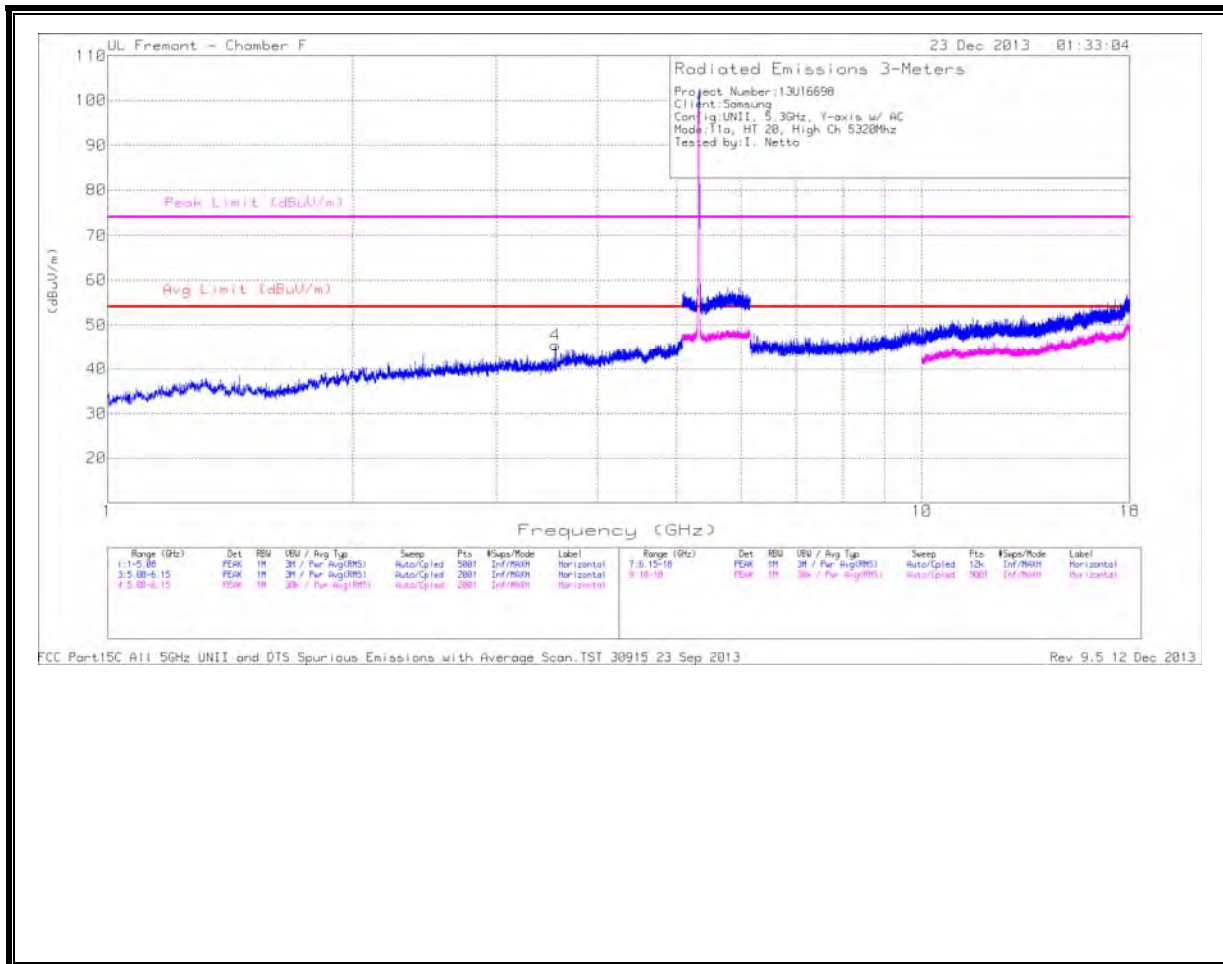



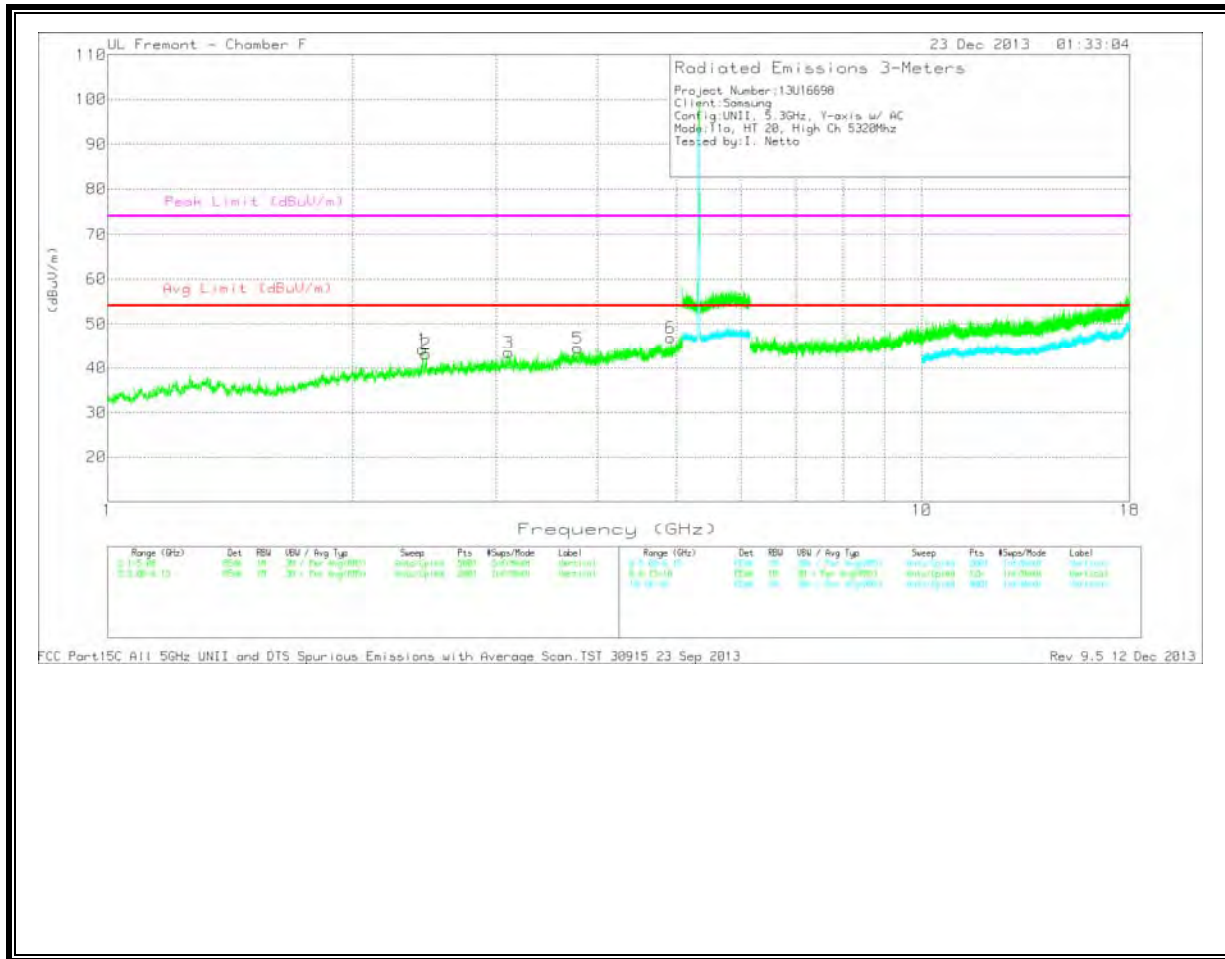


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/5 GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.436	42.66	PK	32.3	-30.7	44.26	53.97	-9.71	74	-29.74	0-360	101	V
2	2.46	41.49	PK	32.3	-30.6	43.19	53.97	-10.78	74	-30.81	0-360	101	V
3	3.107	39.61	PK	33.3	-29.4	43.51	53.97	-10.46	74	-30.49	0-360	101	V
4	3.548	41.75	PK	33.4	-29.7	45.45	53.97	-8.52	74	-28.55	0-360	101	H
5	3.781	40.62	PK	33.6	-29.7	44.52	53.97	-9.45	74	-29.48	0-360	201	V
6	4.914	40.18	PK	34	-27.3	46.88	53.97	-7.09	74	-27.12	0-360	101	V


**11.2.3. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.3 GHz BAND
 AUTHORIZED BANDEDGE (HIGH CHANNEL)**

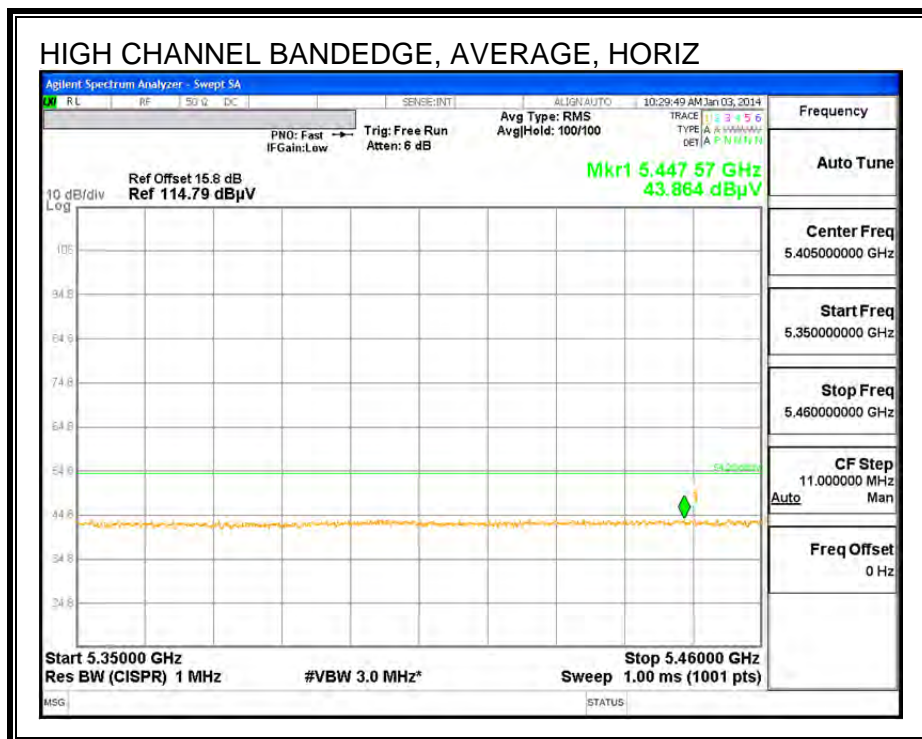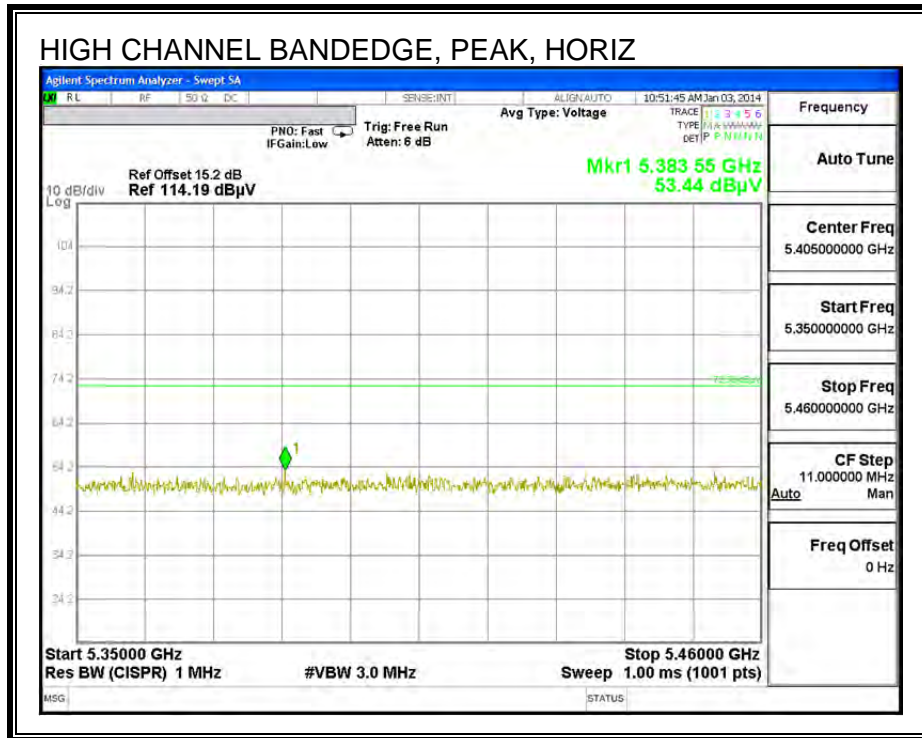


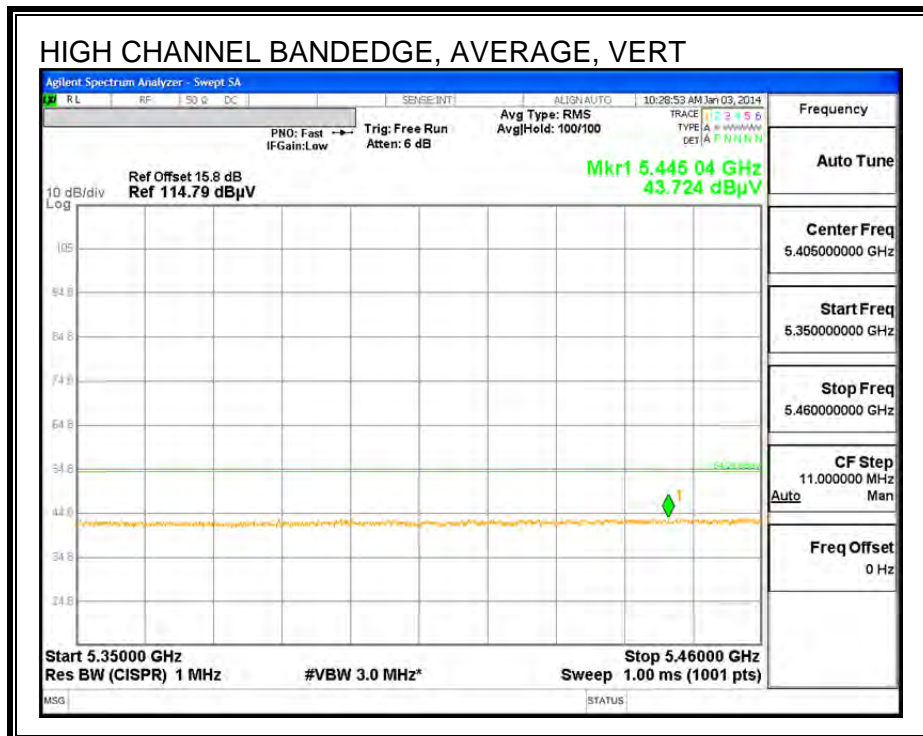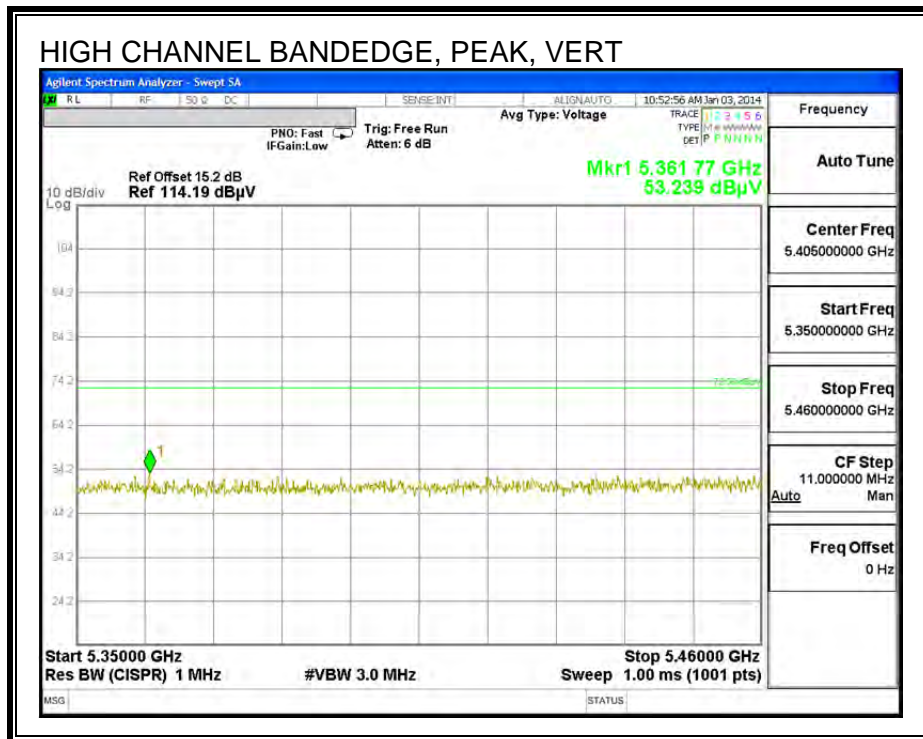

HARMONICS AND SPURIOUS EMISSIONS

**LOW CHANNEL
 HORIZONTAL**

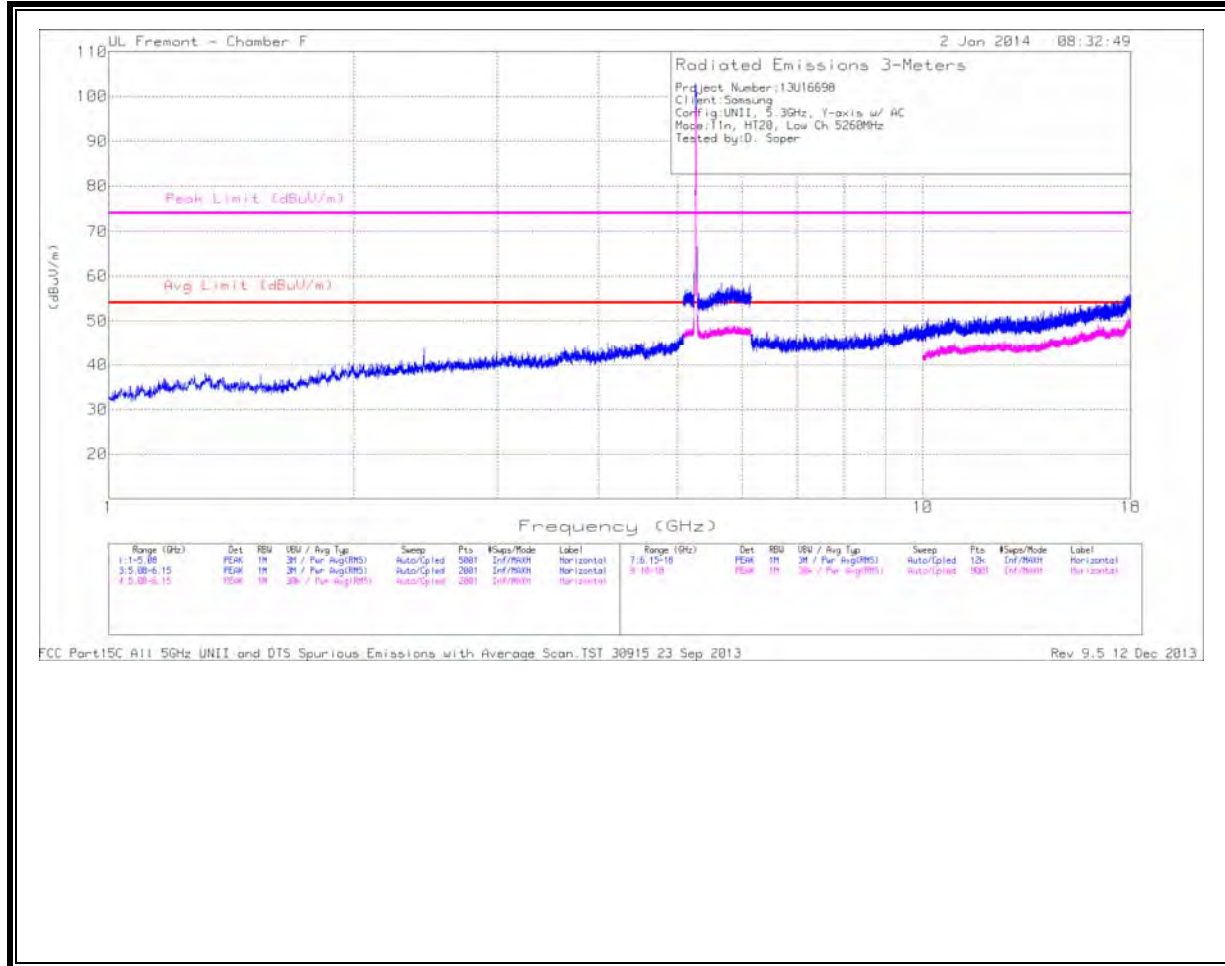

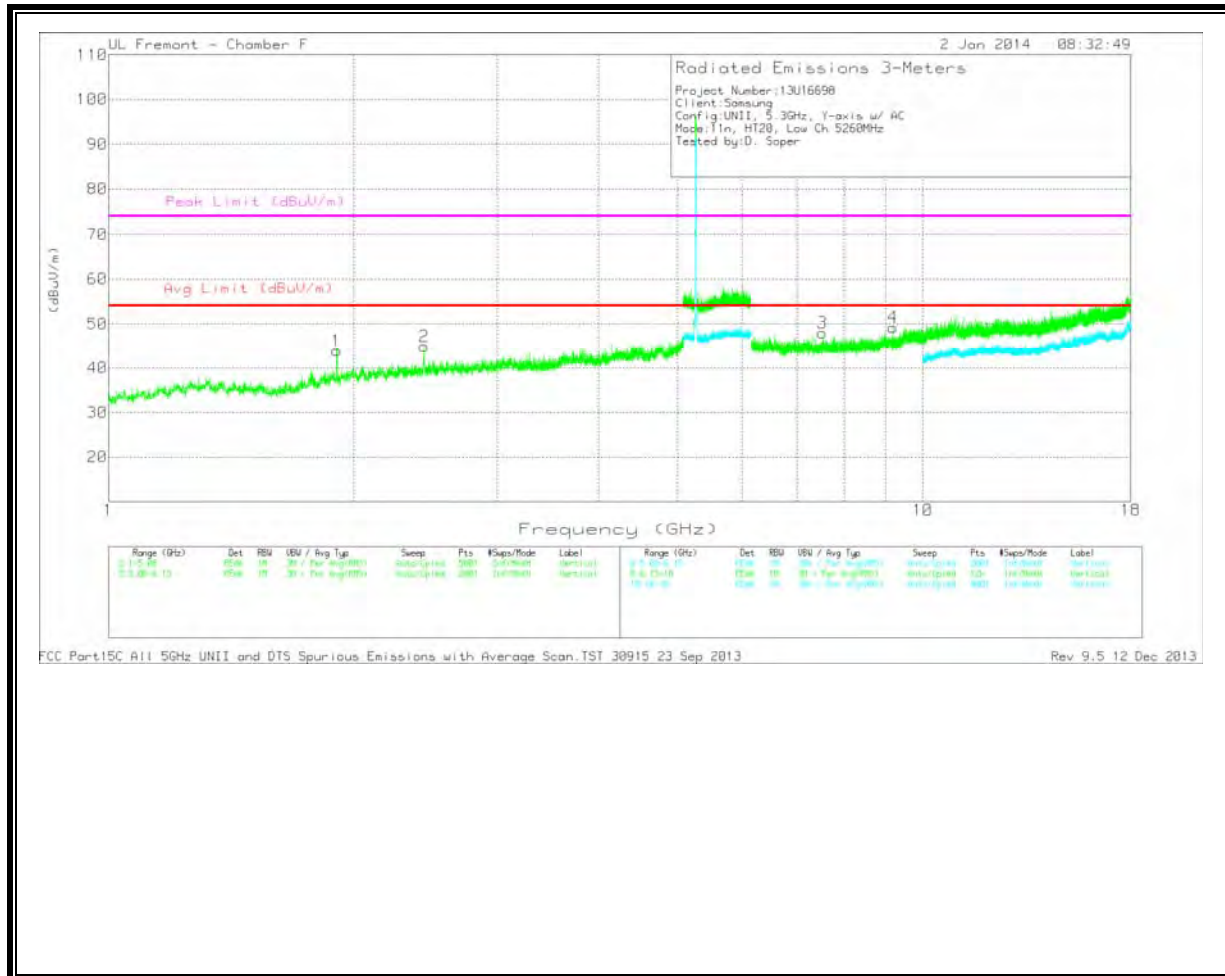

LOW CHANNEL DATA


Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/5 GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.907	43.96	PK	31.2	-31.2	43.96	53.97	-10.01	74	-30.04	0-360	101	V
2	2.44	43.34	PK	32.3	-30.7	44.94	53.97	-9.03	74	-29.06	0-360	101	V

PK - Peak detector

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/6 GHz HPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	7.528	37.72	PK	35.8	-25.5	48.02	53.97	-5.95	74	-25.98	0-360	101	V
4	9.19	36.53	PK	36.5	-23.8	49.23	53.97	-4.74	74	-24.77	0-360	101	V

MID CHANNEL
HORIZONTAL

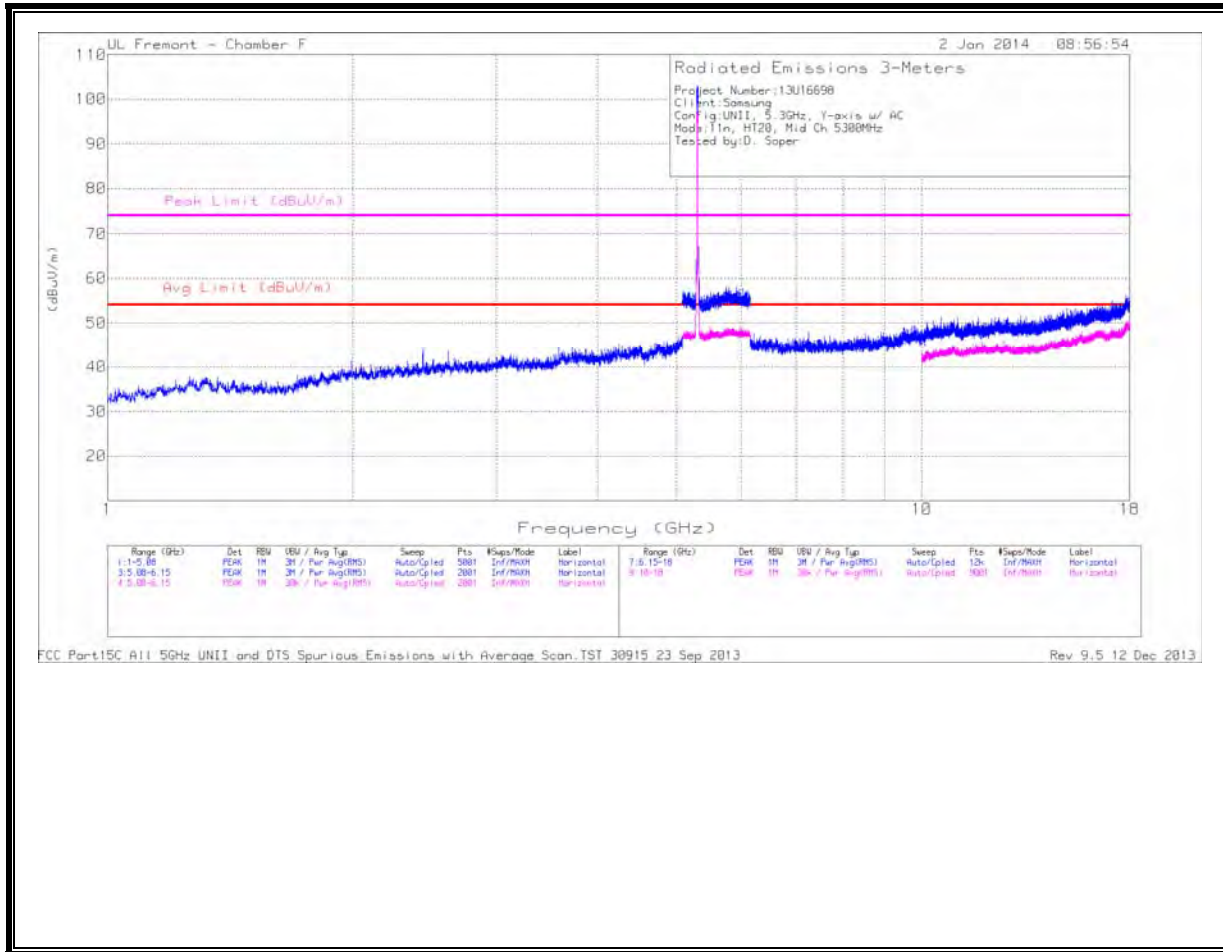

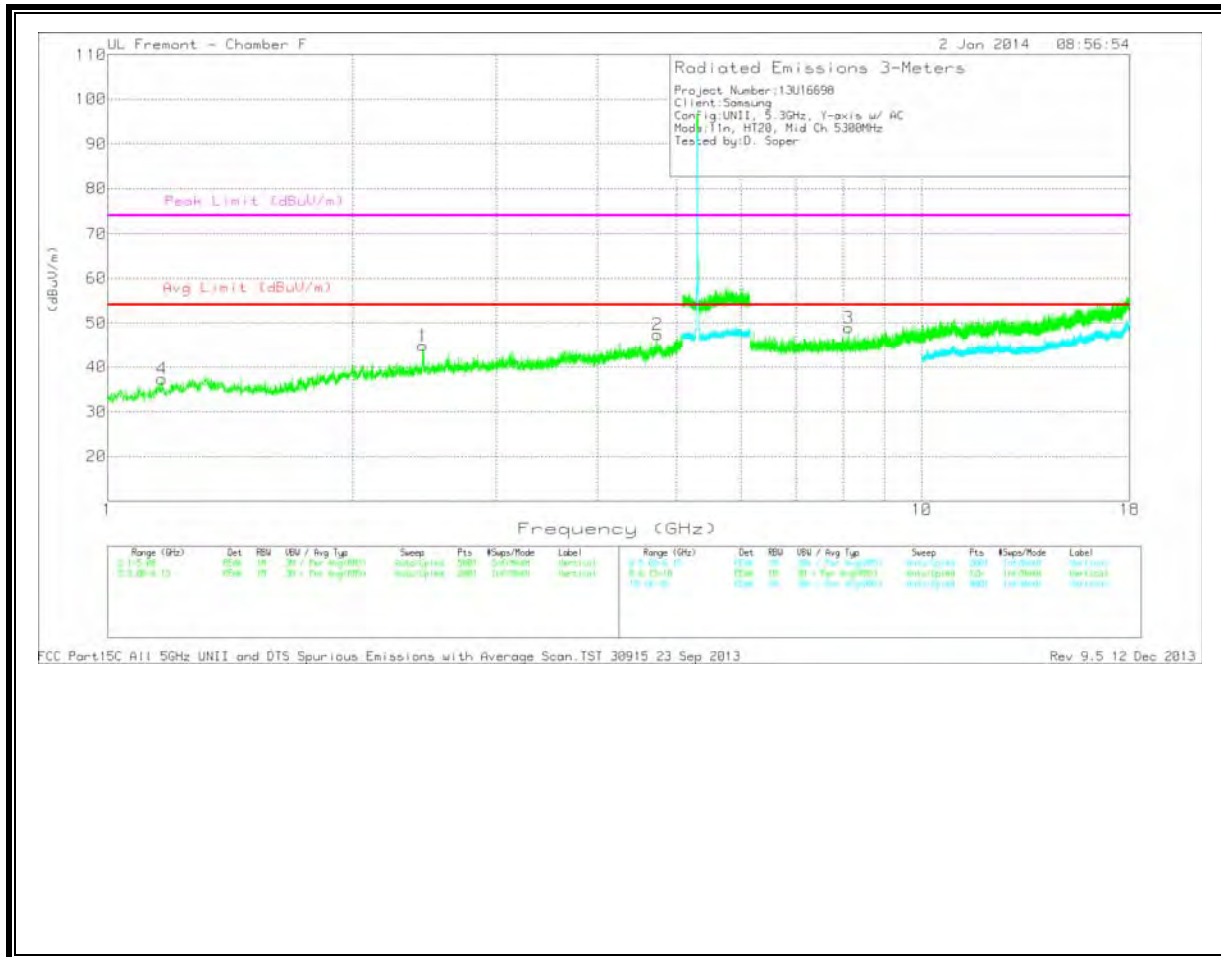

MID CHANNEL DATA


Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/5 GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	1.166	40.93	PK	28.7	-32.3	37.33	53.97	-16.64	74	-36.67	0-360	201	V
1	2.439	43.24	PK	32.3	-30.7	44.84	53.97	-9.13	74	-29.16	0-360	201	V
2	4.734	41.2	PK	34.1	-27.9	47.4	53.97	-6.57	74	-26.6	0-360	101	V

PK - Peak detector

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/6 GHz HPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	8.136	38.53	PK	36	-25.6	48.93	53.97	-5.04	74	-25.07	0-360	201	V

HIGH CHANNEL
HORIZONTAL

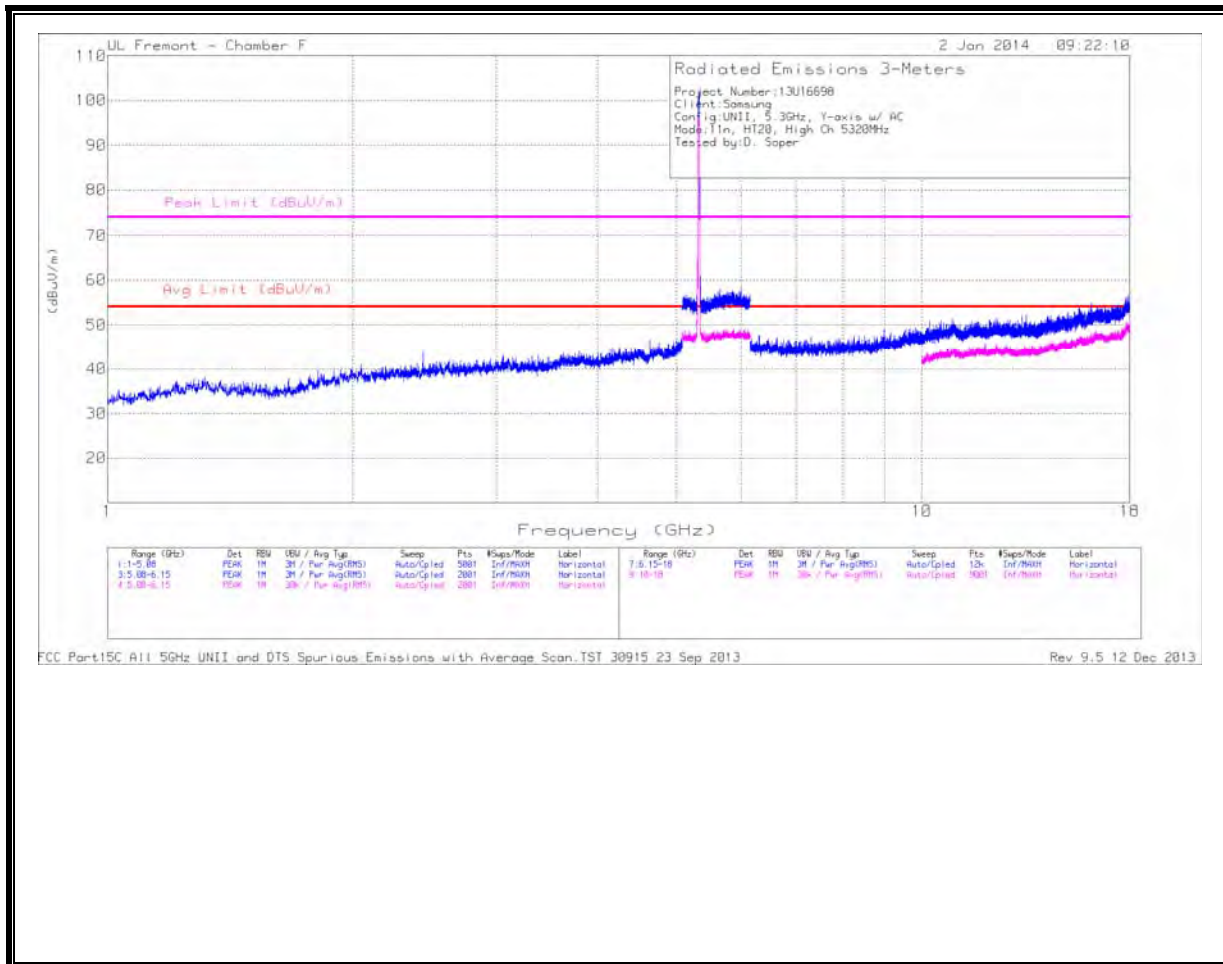

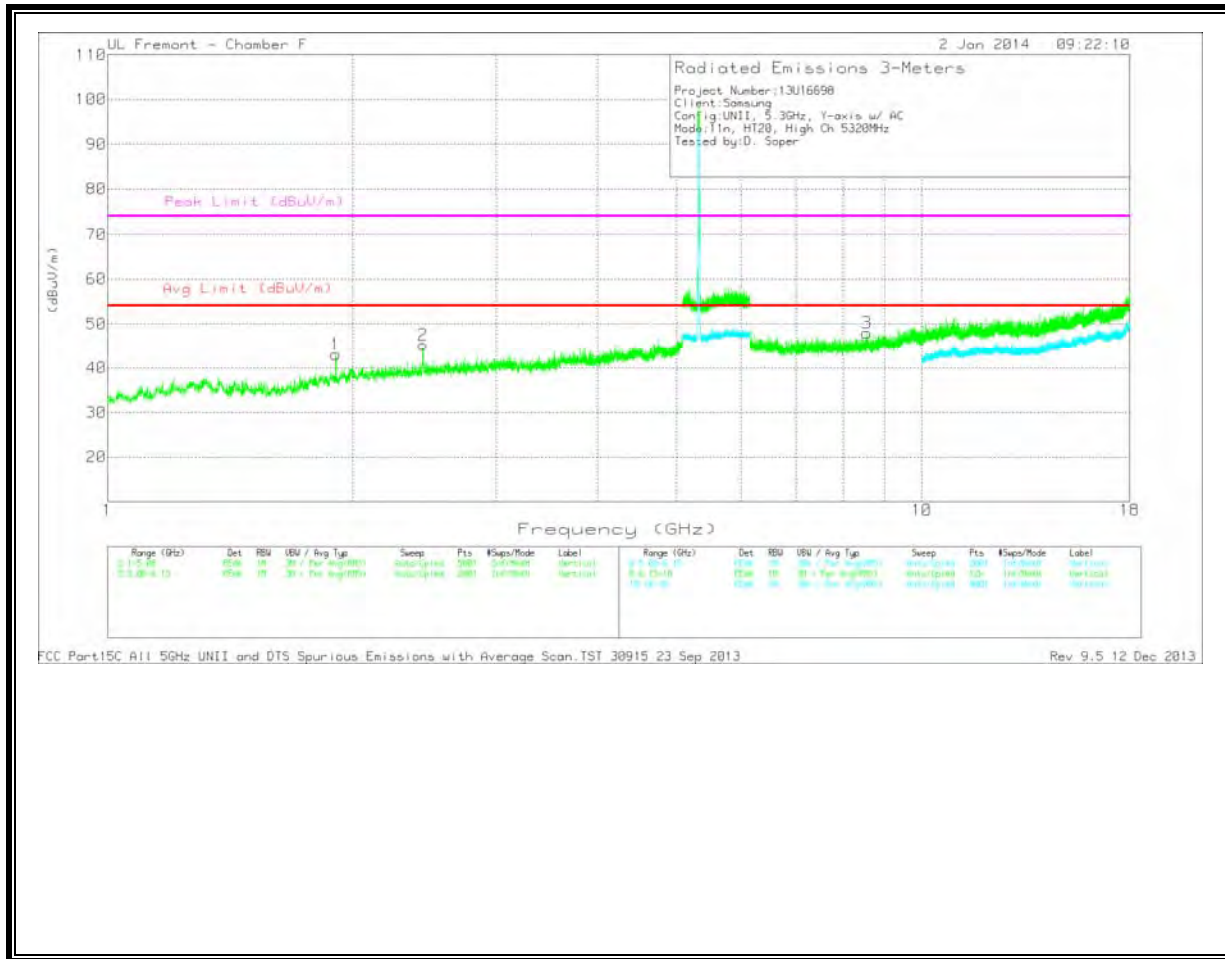



Trace Markers



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/5 GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.907	43.06	PK	31.2	-31.2	43.06	53.97	-10.91	74	-30.94	0-360	101	V
2	2.44	43.66	PK	32.3	-30.7	45.26	53.97	-8.71	74	-28.74	0-360	101	V

PK - Peak detector

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/6 GHz HPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	8.555	37	PK	36	-25	48	53.97	-5.97	74	-26	0-360	201	V


**11.2.5. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.3 GHz BAND
 AUTHORIZED BANDEDGE (HIGH CHANNEL)**

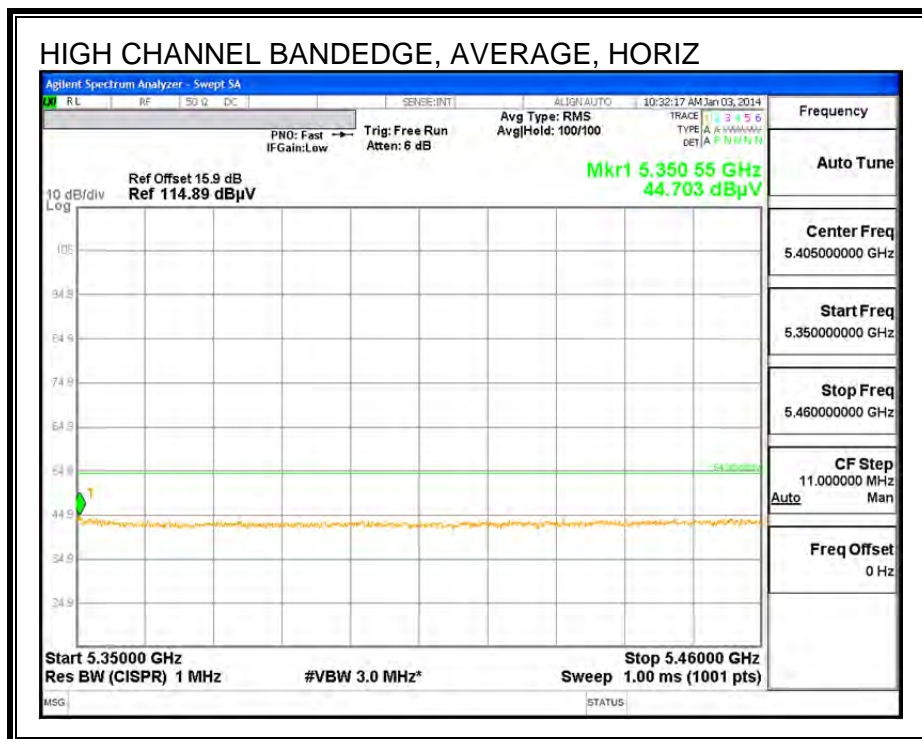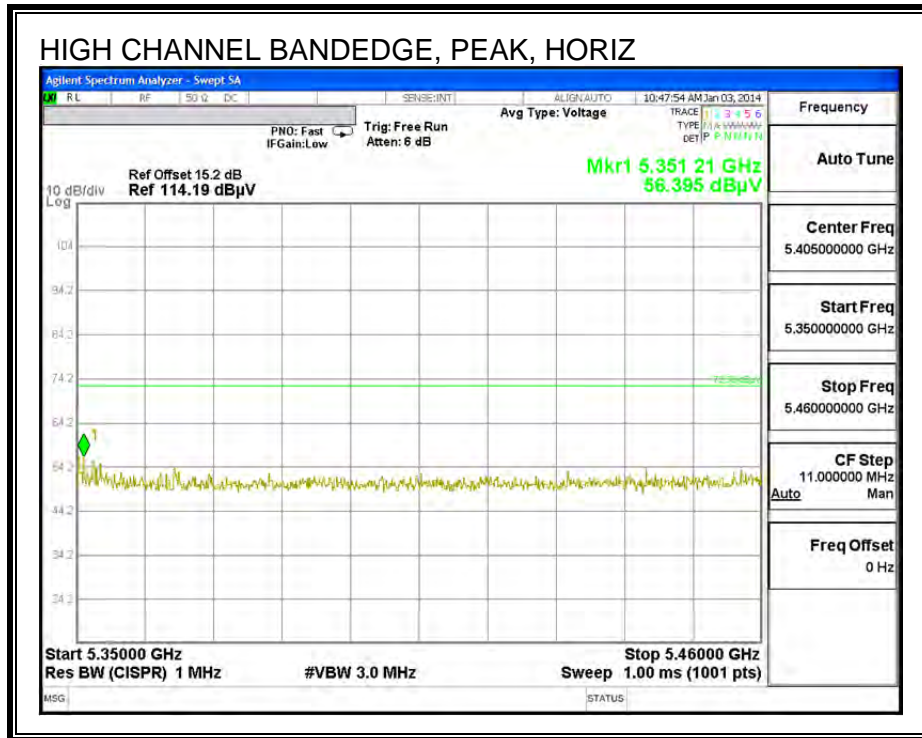


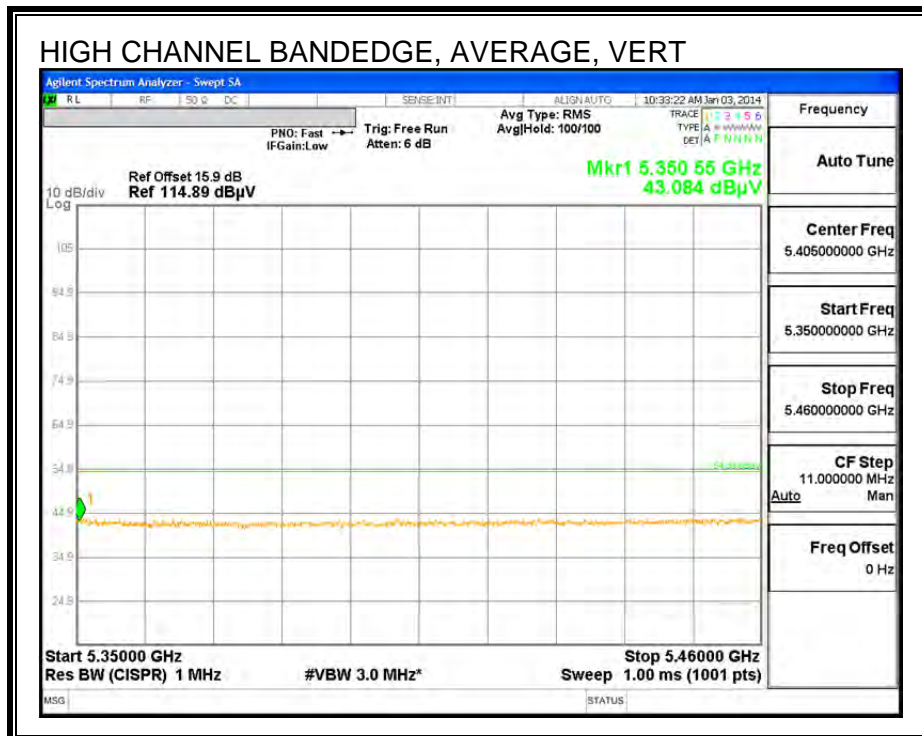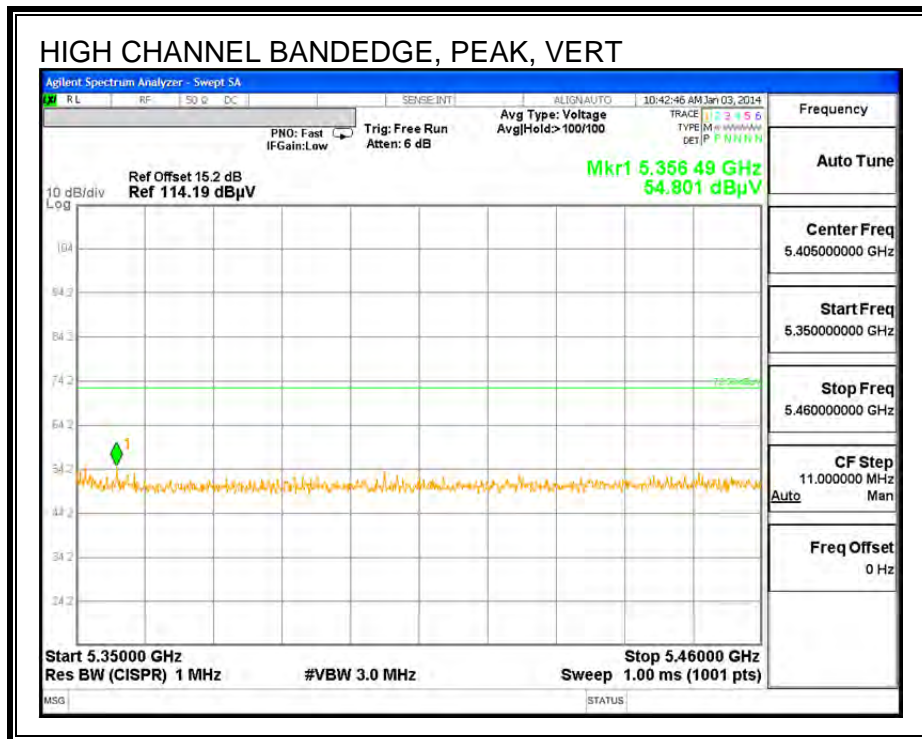

HARMONICS AND SPURIOUS EMISSIONS

**LOW CHANNEL
 HORIZONTAL**

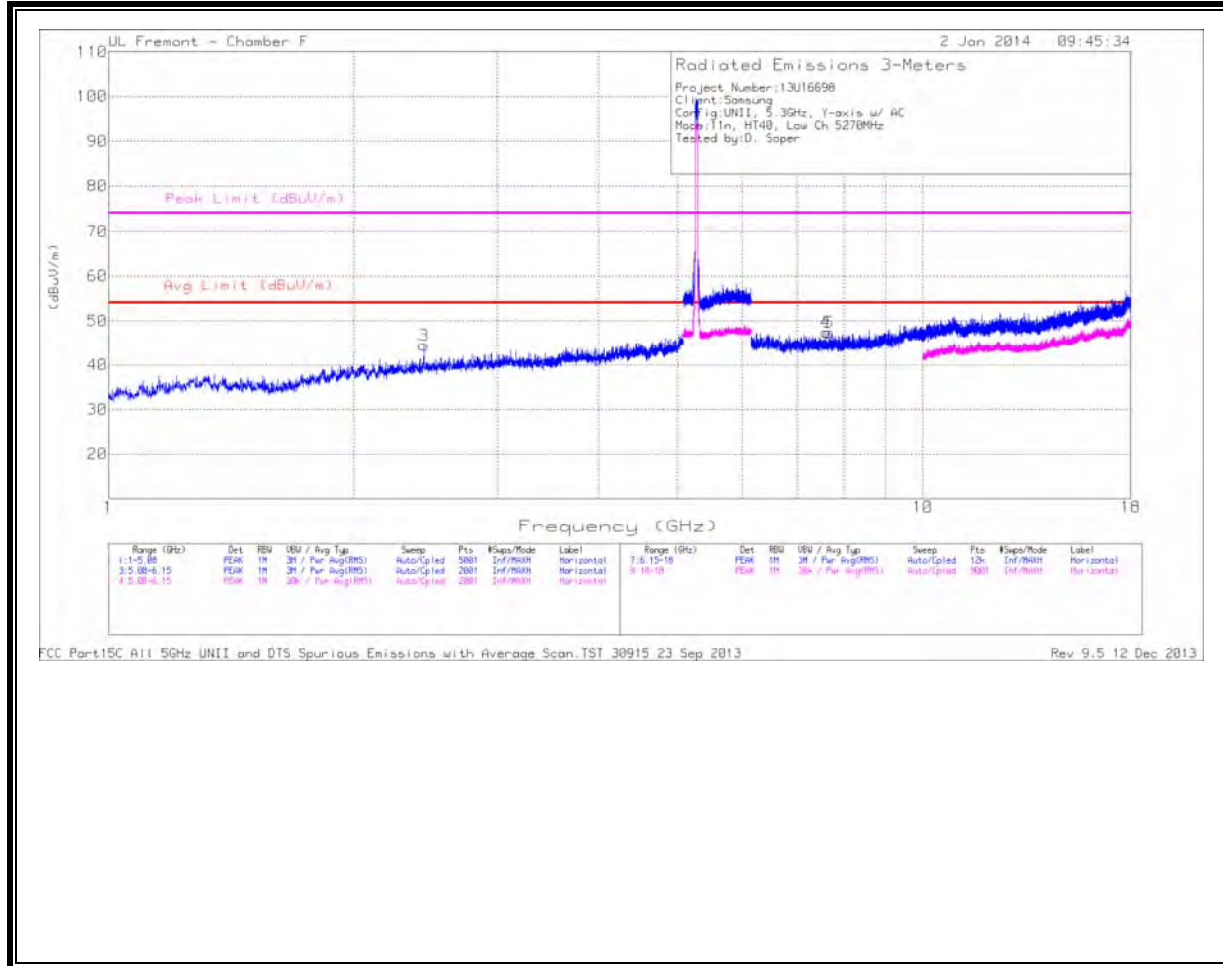

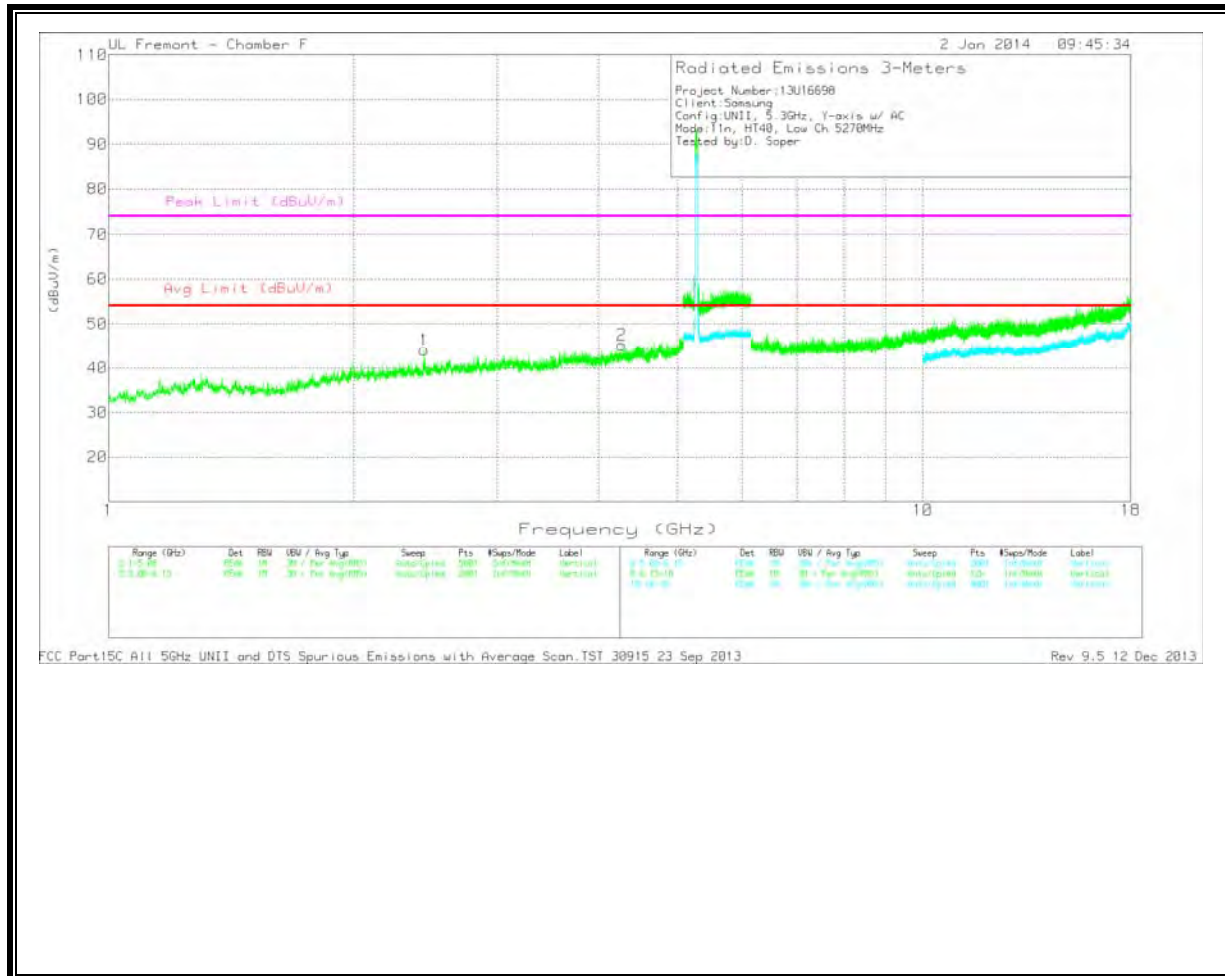

LOW CHANNEL DATA


Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/5 GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	2.439	42.9	PK	32.3	-30.7	44.5	53.97	-9.47	74	-29.5	0-360	199	H
1	2.44	42.51	PK	32.3	-30.7	44.11	53.97	-9.86	74	-29.89	0-360	101	V
2	4.27	39.53	PK	33.5	-27.8	45.23	53.97	-8.74	74	-28.77	0-360	201	V

PK - Peak detector

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/6 GHz HPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	7.605	37.17	PK	35.9	-25.6	47.47	53.97	-6.5	74	-26.53	0-360	101	H
5	7.665	37.78	PK	35.9	-26.3	47.38	53.97	-6.59	74	-26.62	0-360	200	H

HIGH CHANNEL
HORIZONTAL

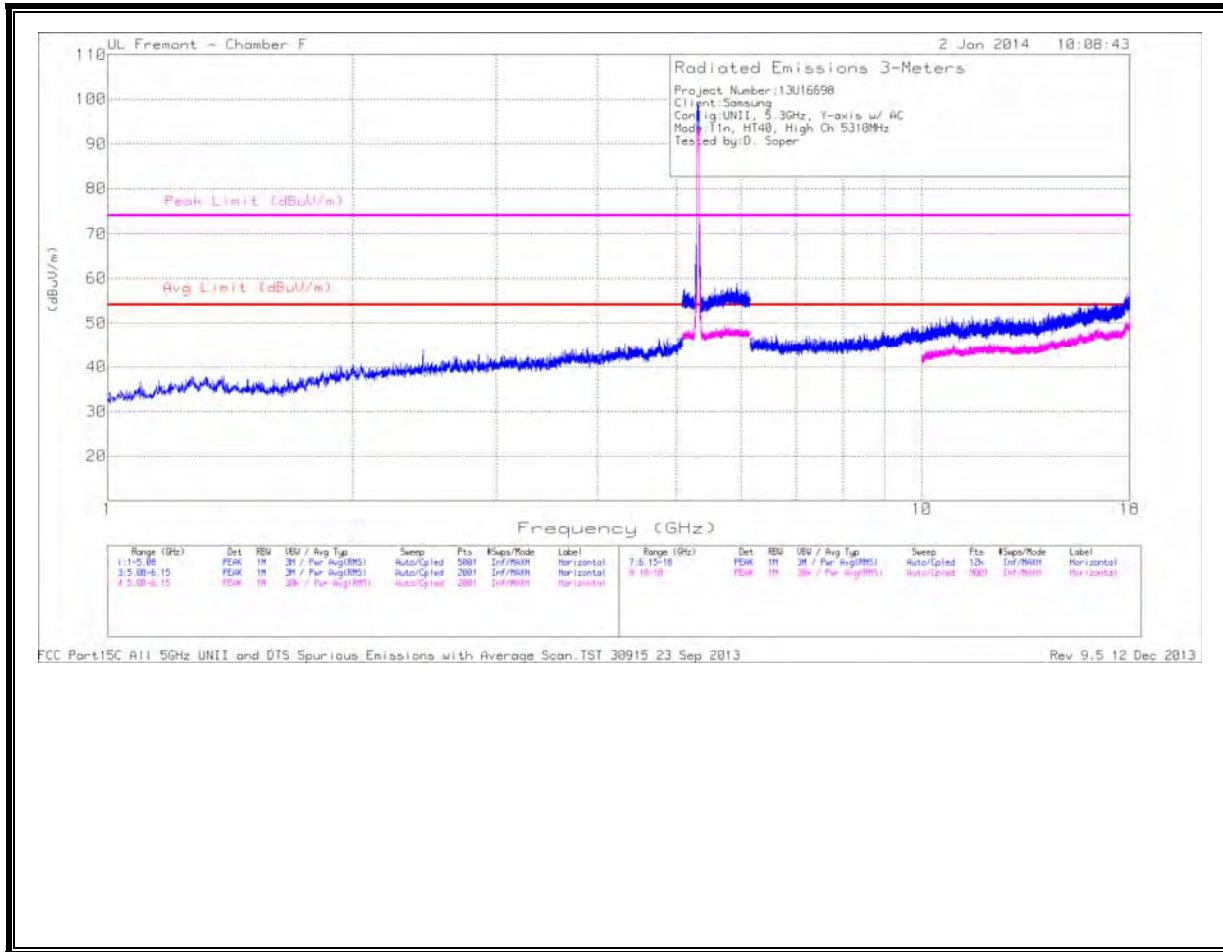

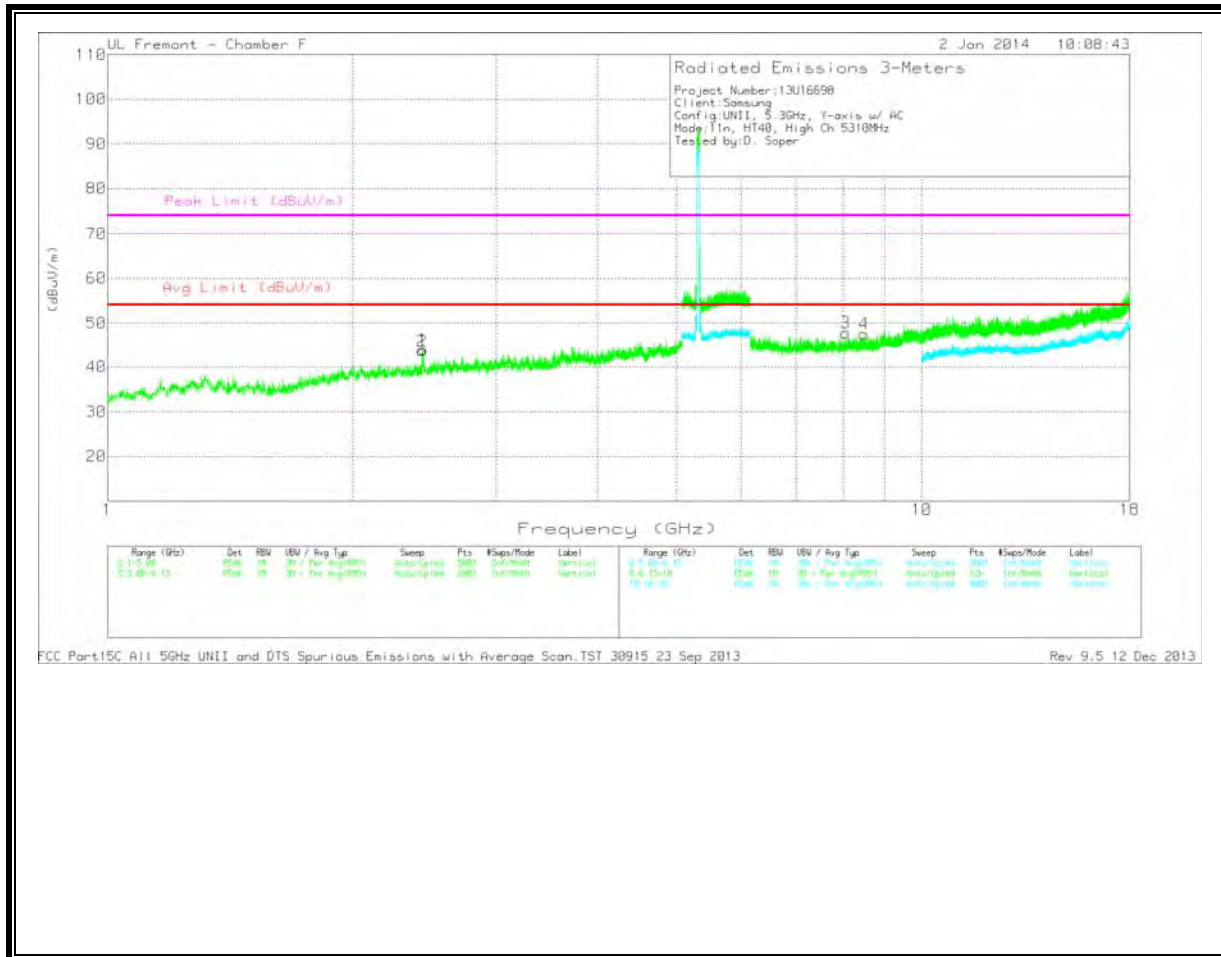



Trace Markers



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/5 GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	2.435	42.08	PK	32.3	-30.7	43.68	53.97	-10.29	74	-30.32	0-360	101	V
1	2.44	42.29	PK	32.3	-30.7	43.89	53.97	-10.08	74	-30.11	0-360	201	V

PK - Peak detector

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/6 GHz HPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	8.066	37.2	PK	36	-25.4	47.8	53.97	-6.17	74	-26.2	0-360	201	V
4	8.49	36.76	PK	36	-25.2	47.56	53.97	-6.41	74	-26.44	0-360	101	V


**11.2.7. TX ABOVE 1 GHz 802.11ac HT80 MODE IN THE 5.3 GHz BAND
 AUTHORIZED BANDEDGE (MID CHANNEL)**

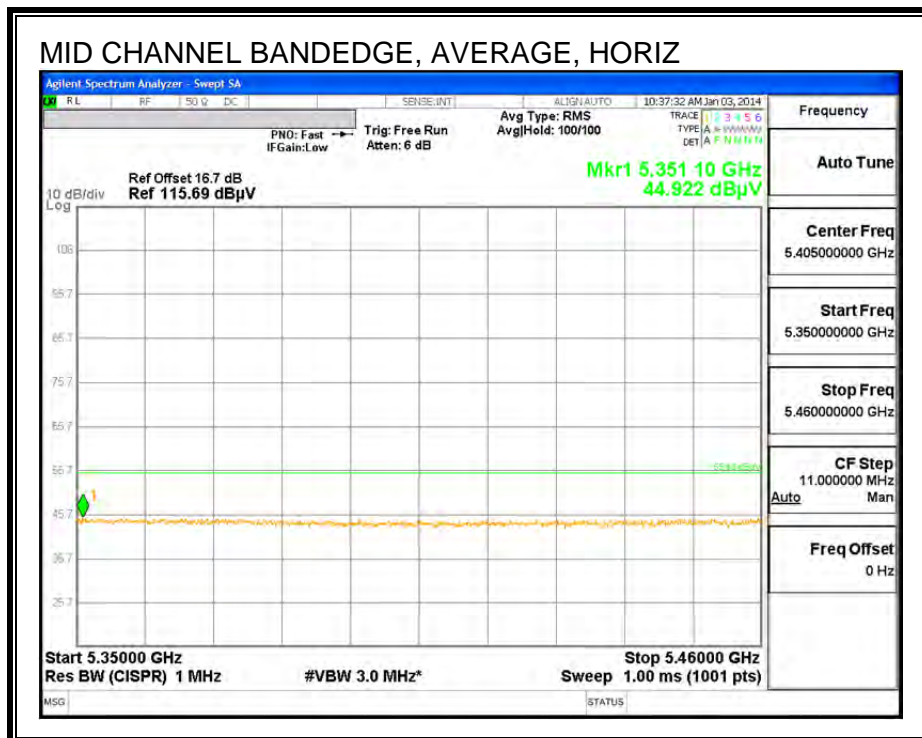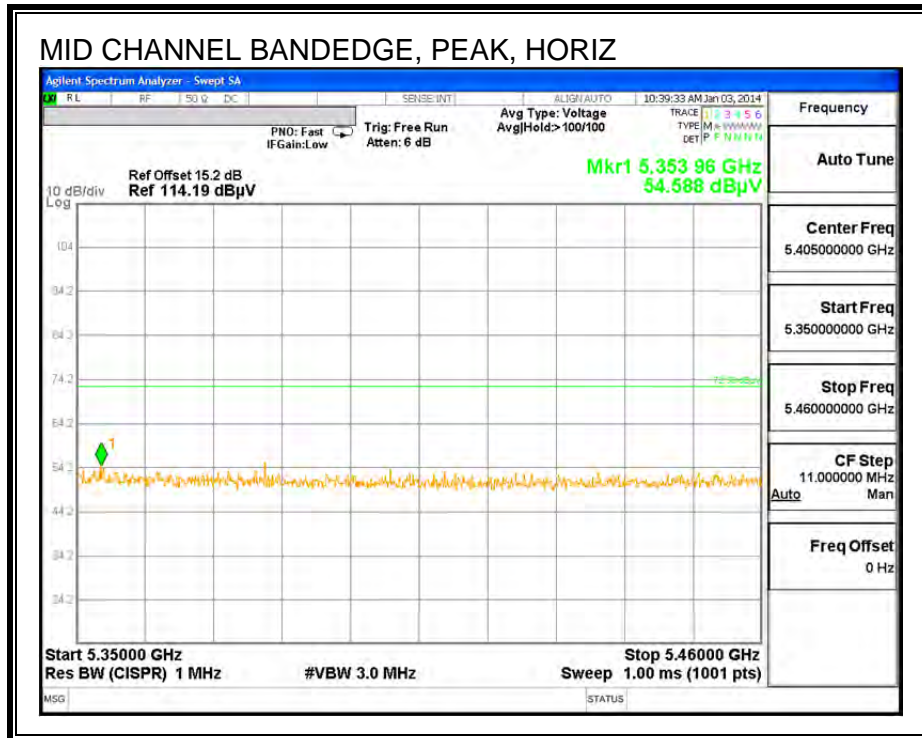


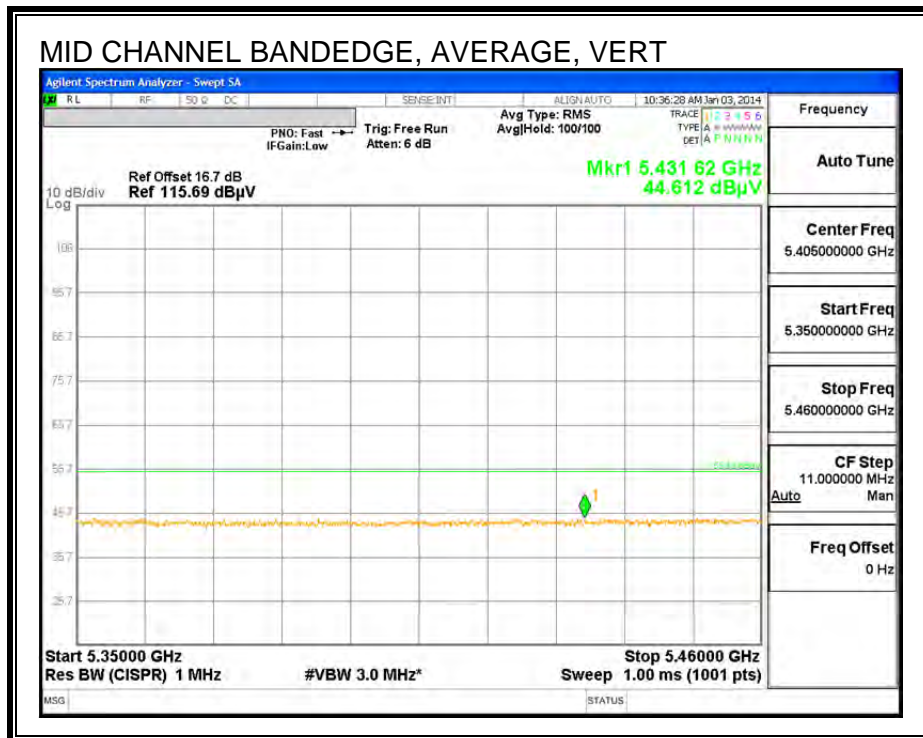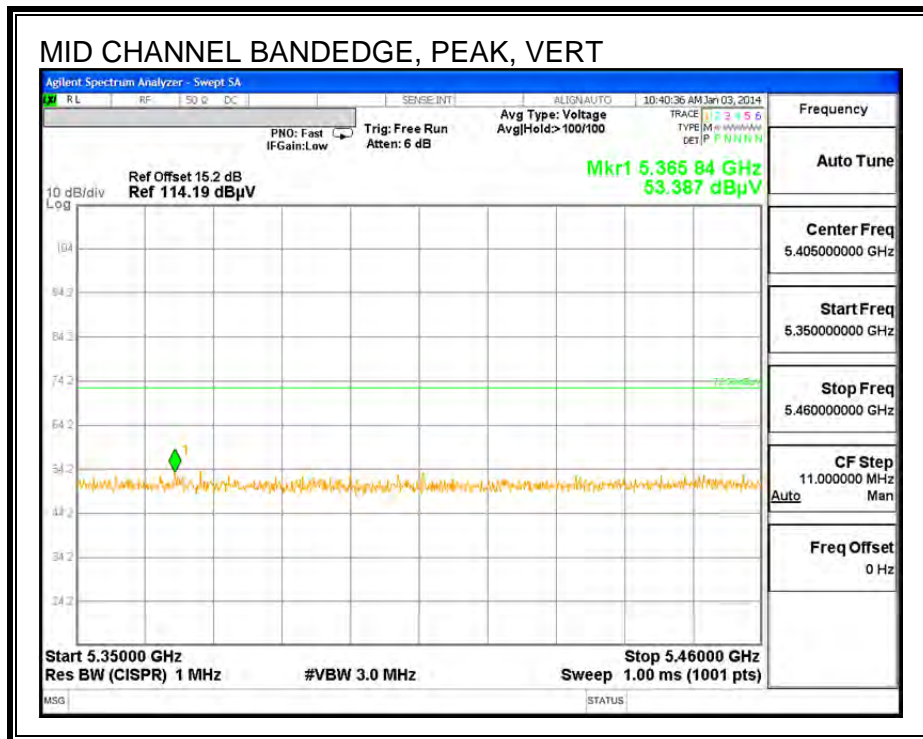

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL
 HORIZONTAL

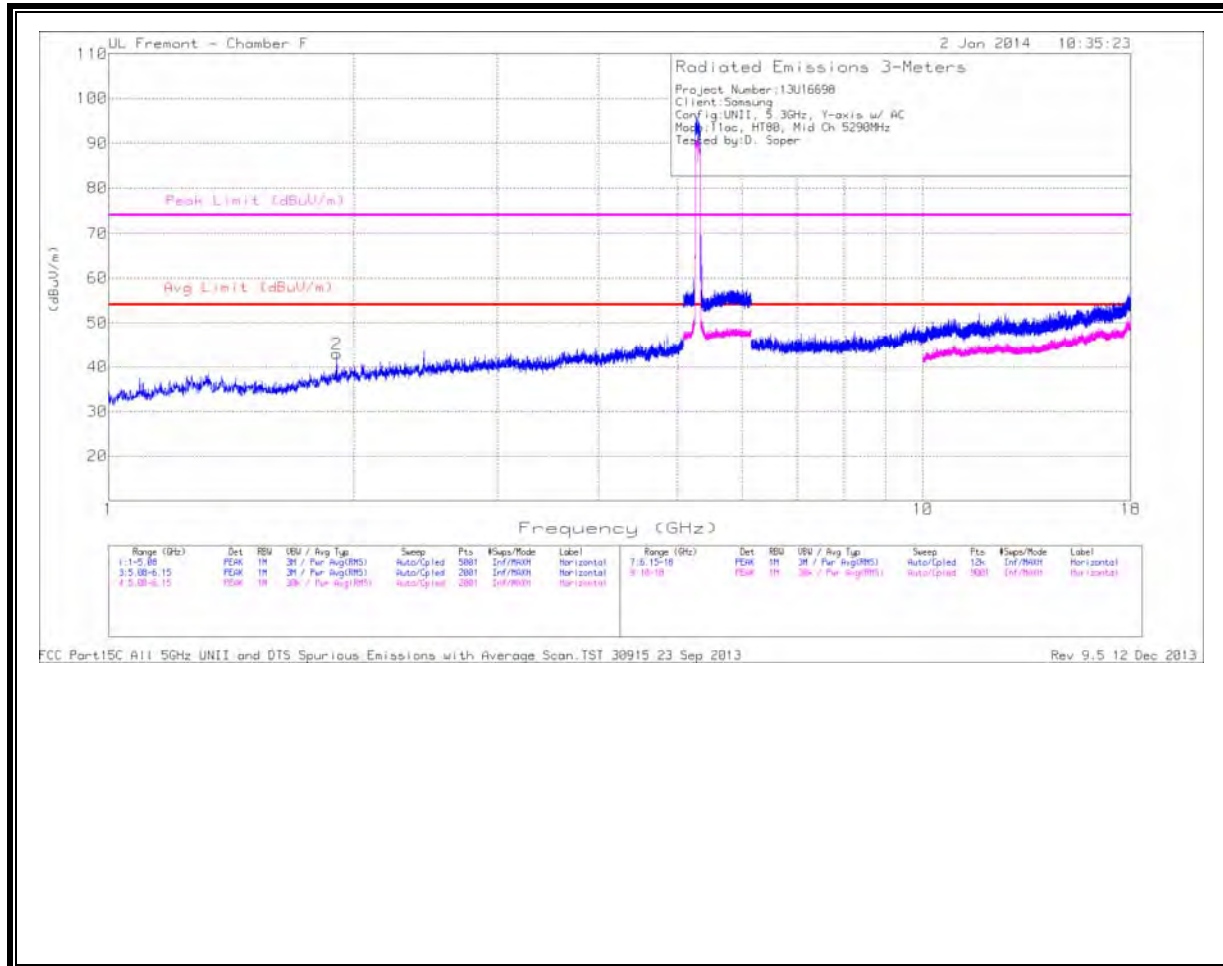

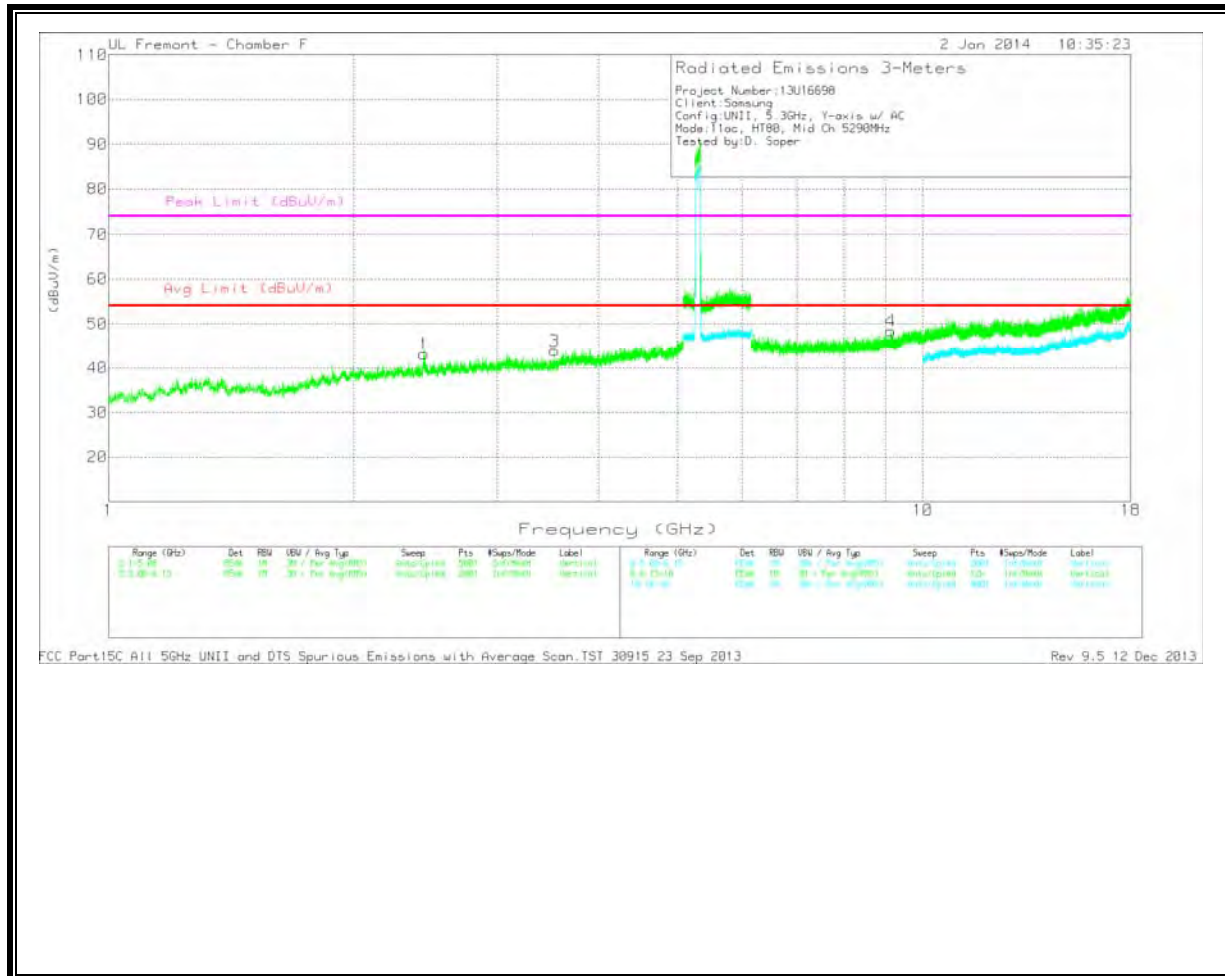



LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/5 GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	1.907	42.94	PK	31.2	-31.2	42.94	53.97	-11.03	74	-31.06	0-360	200	H
1	2.439	41.57	PK	32.3	-30.7	43.17	53.97	-10.8	74	-30.83	0-360	101	V
3	3.528	40.13	PK	33.3	-29.5	43.93	53.97	-10.04	74	-30.07	0-360	201	V


PK - Peak detector

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/6 GHz HPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	9.131	35.69	PK	36.5	-23.8	48.39	53.97	-5.58	74	-25.61	0-360	201	V

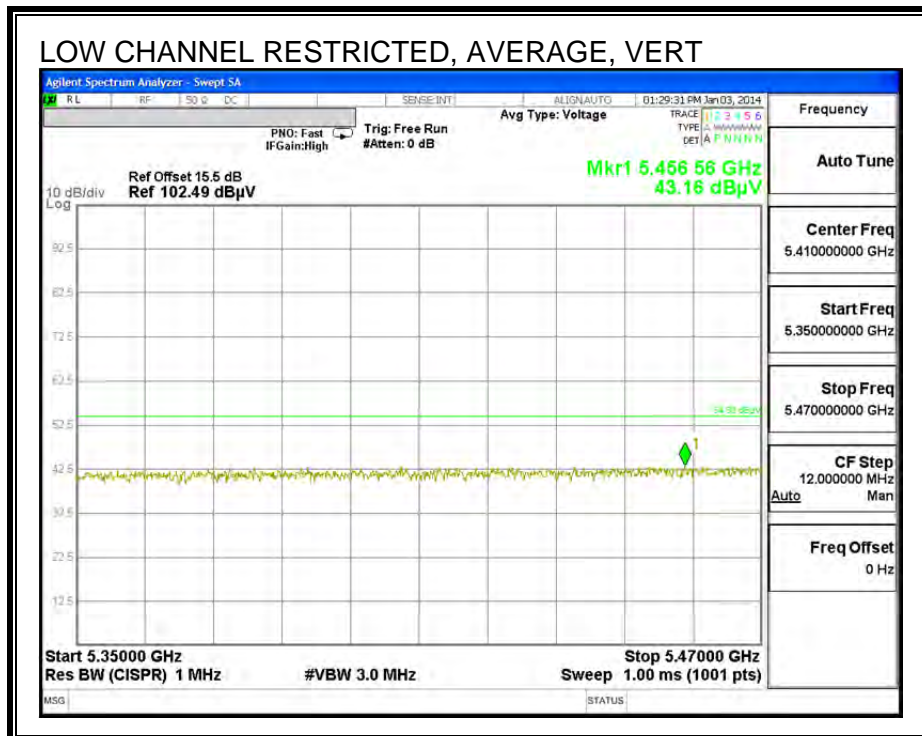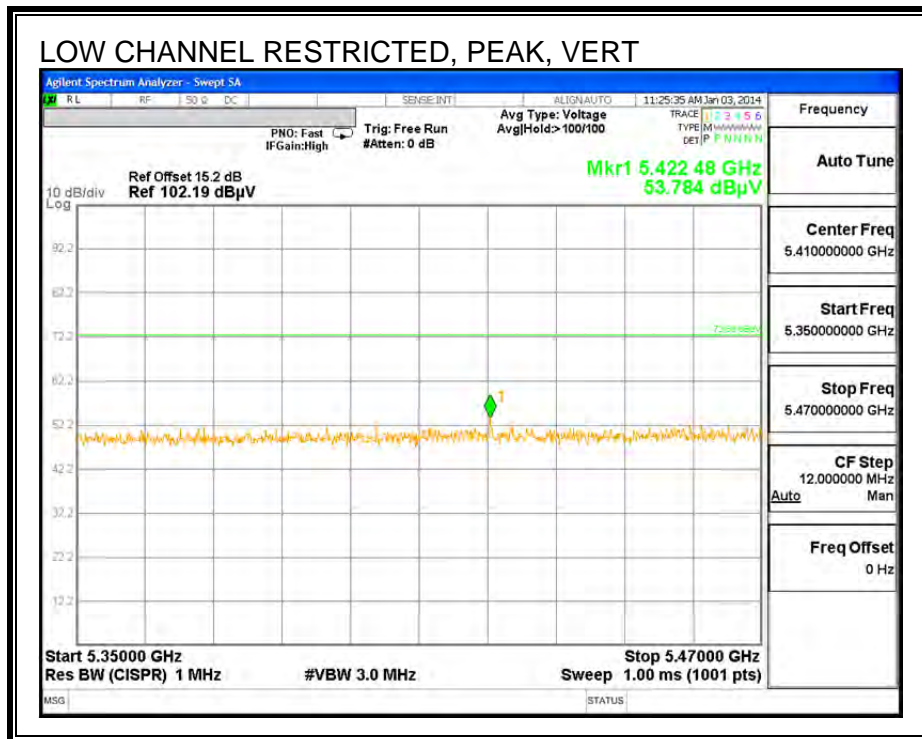


AUTHORIZED BANDEDGE (HIGH CHANNEL)

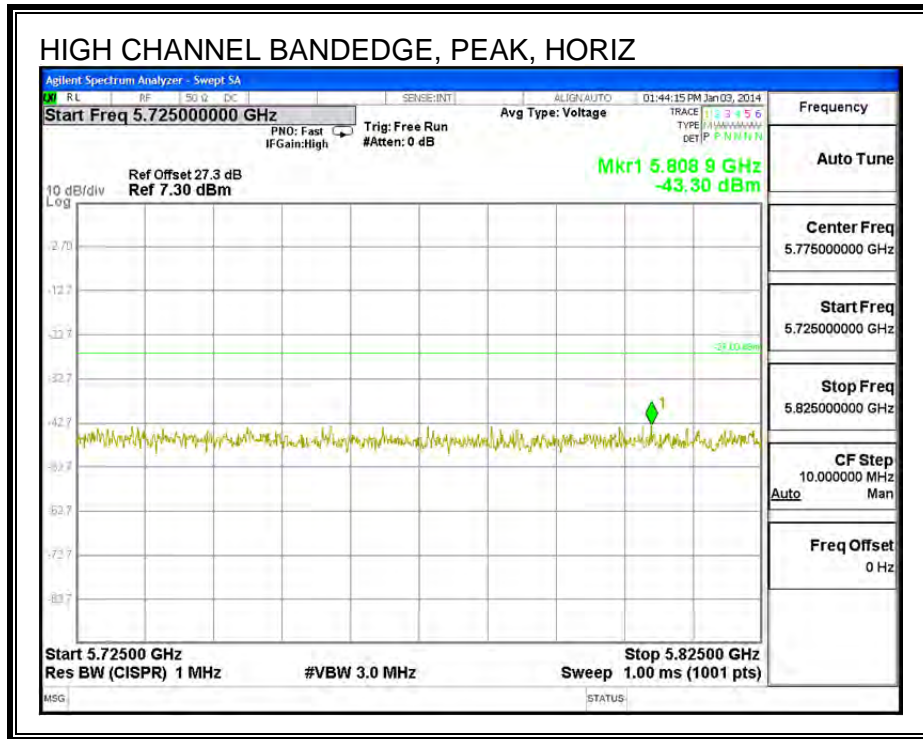


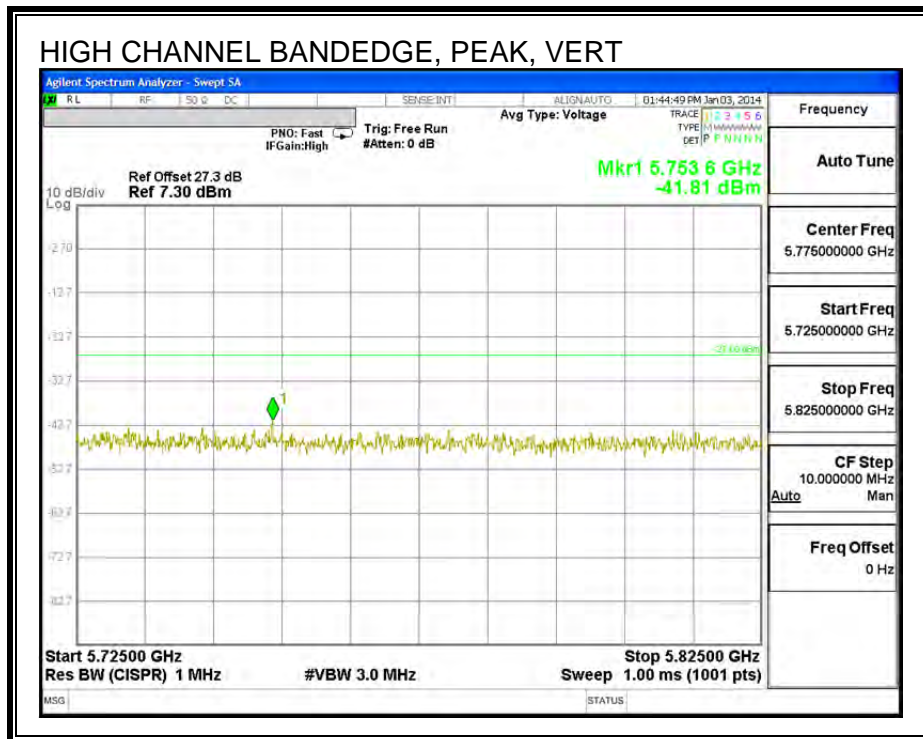

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL
 HORIZONTAL

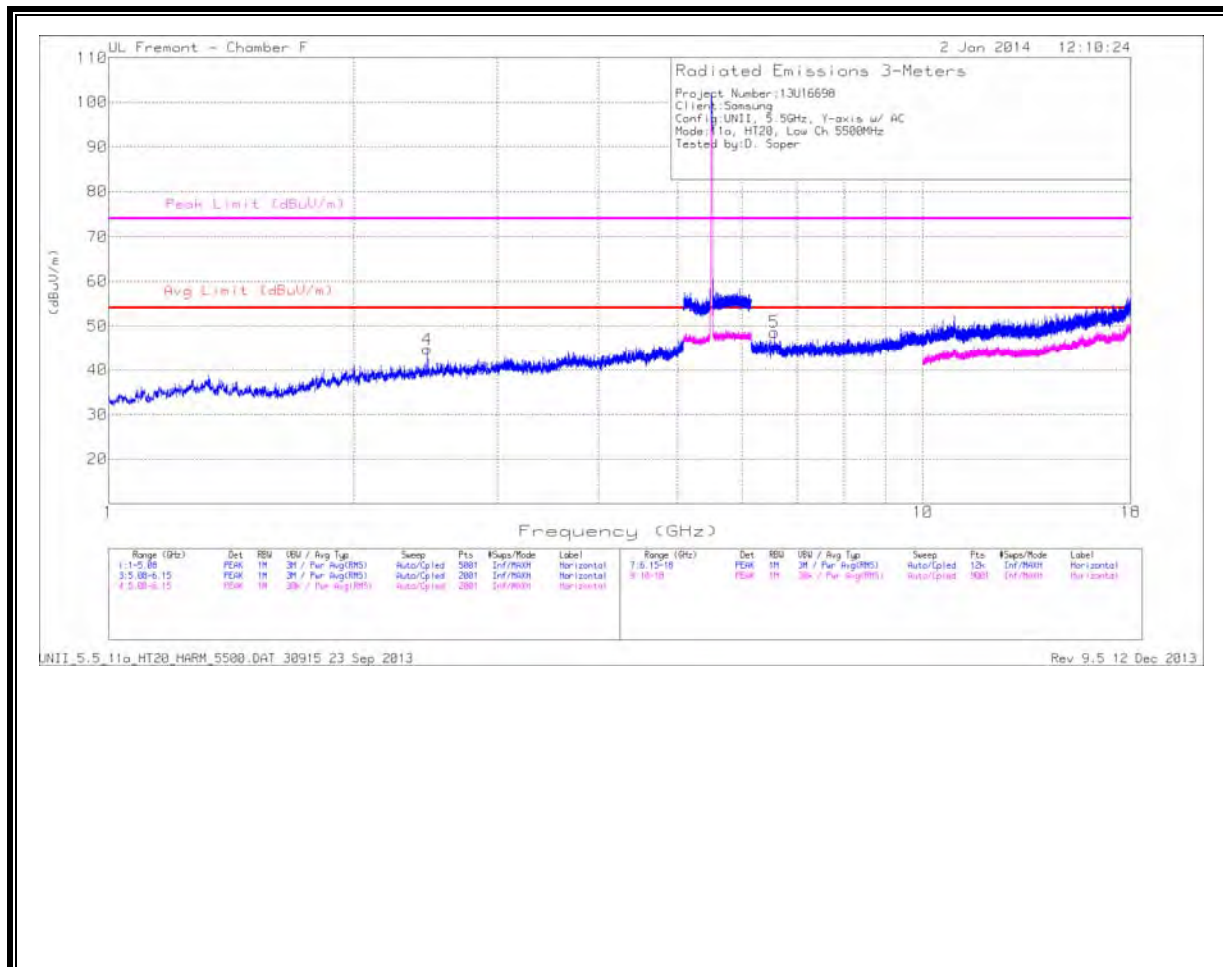

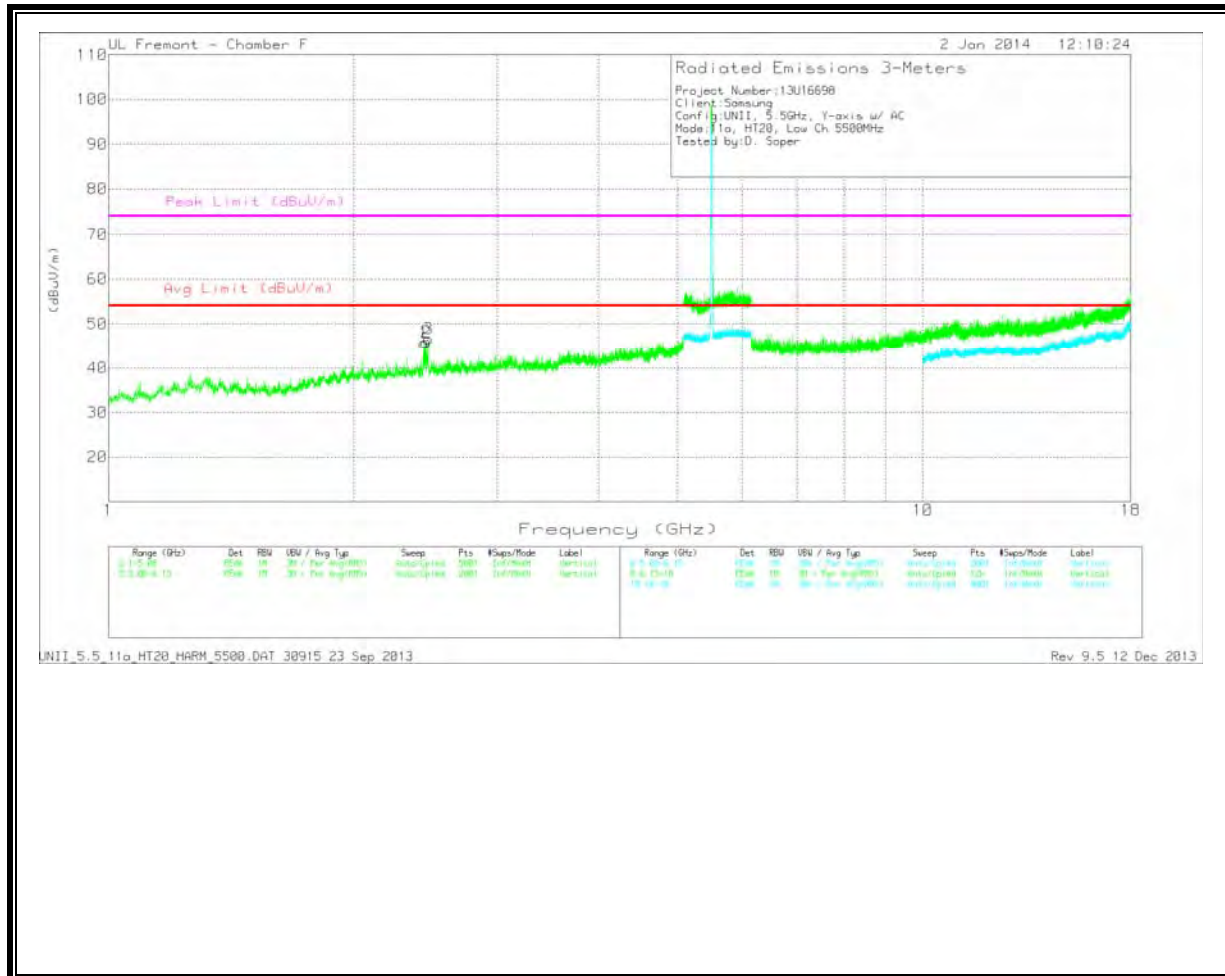


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/5 GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.441	44.04	PK	32.3	-30.7	45.64	53.97	-8.33	74	-28.36	0-360	201	V
2	2.455	44.2	PK	32.3	-30.6	45.9	53.97	-8.07	74	-28.1	0-360	201	V
4	2.461	43.03	PK	32.3	-30.6	44.73	53.97	-9.24	74	-29.27	0-360	200	H
3	2.47	44.88	PK	32.4	-30.6	46.68	53.97	-7.29	74	-27.32	0-360	201	V


PK - Peak detector

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/6 GHz HPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	6.572	39.22	PK	35.8	-26.4	48.62	53.97	-5.35	74	-25.38	0-360	101	H

MID CHANNEL
HORIZONTAL

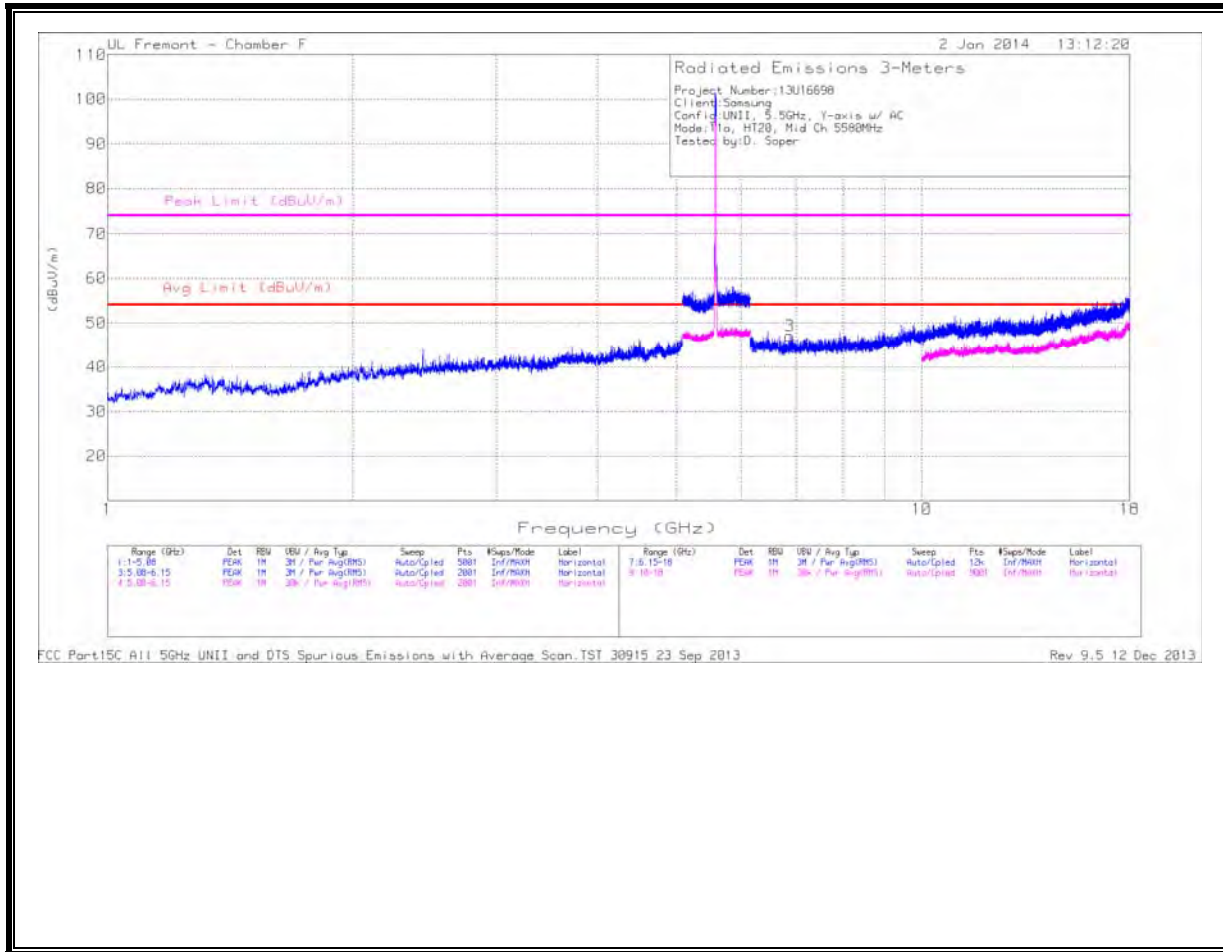

VERTICAL

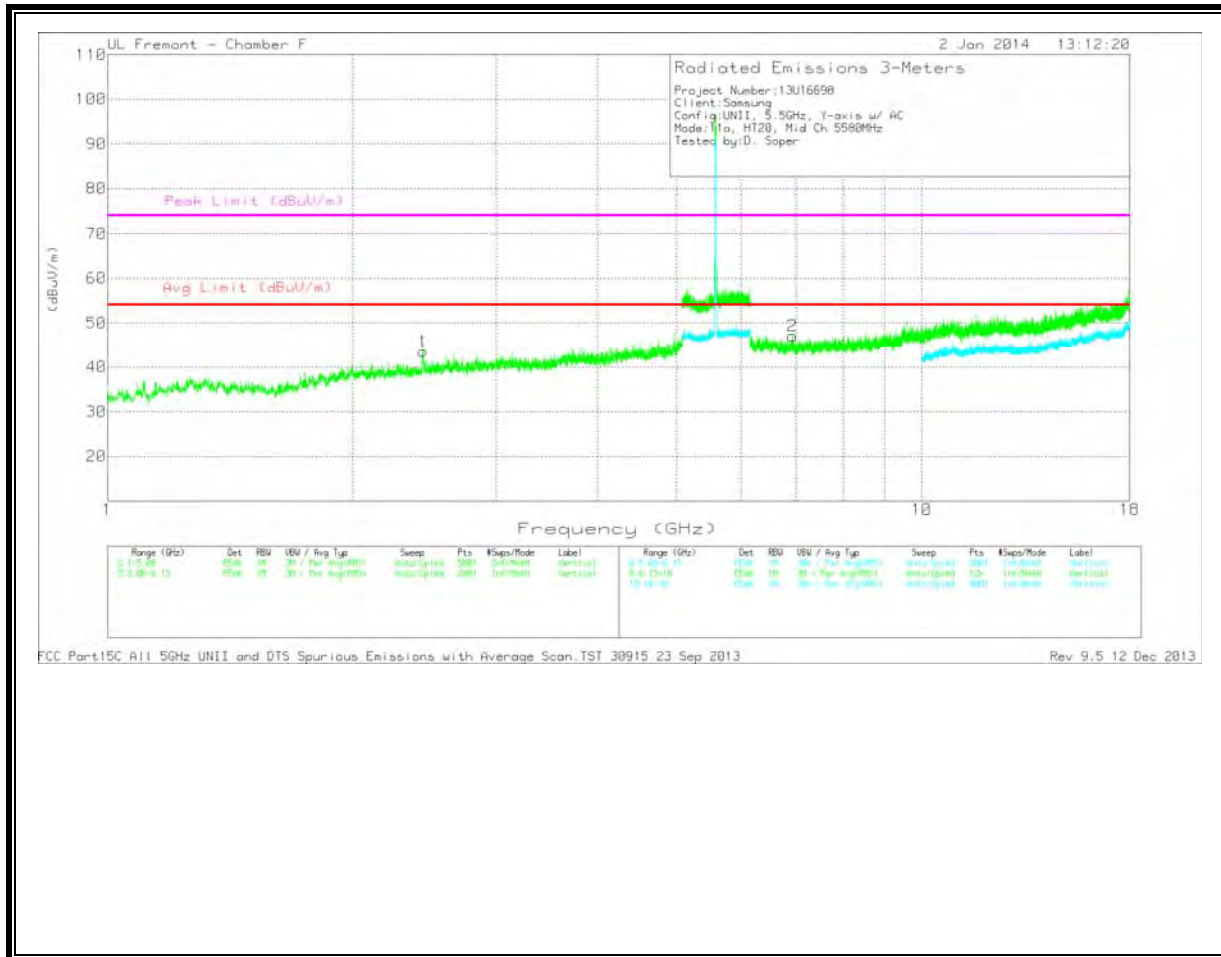


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/5 GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.441	41.93	PK	32.3	-30.7	43.53	53.97	-10.44	74	-30.47	0-360	201	V


PK - Peak detector

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/6 GHz HPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	6.882	38.21	PK	35.7	-26.8	47.11	53.97	-6.86	74	-26.89	0-360	101	H
2	6.936	37.91	PK	35.7	-26.5	47.11	53.97	-6.86	74	-26.89	0-360	201	V

HIGH CHANNEL
HORIZONTAL

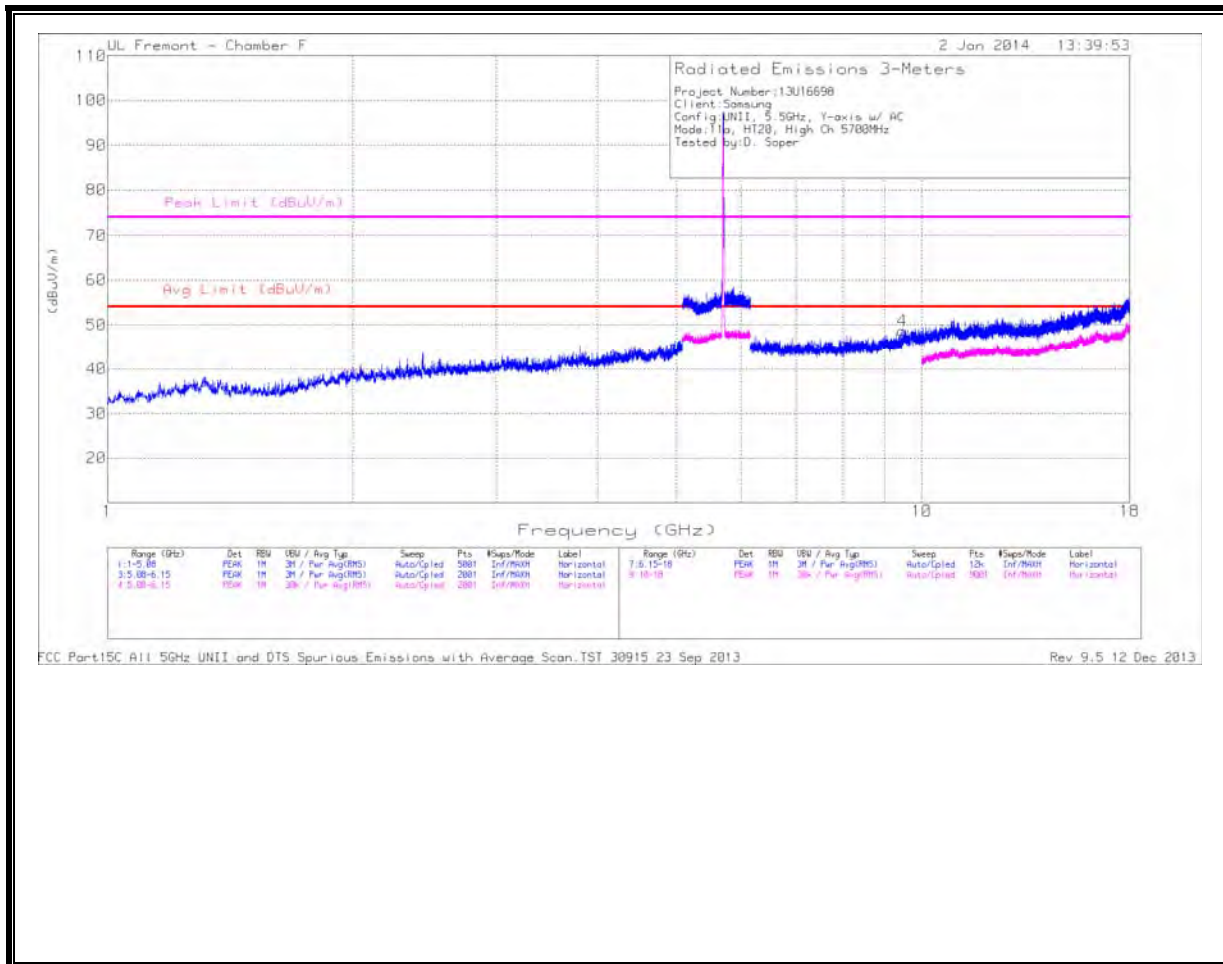

VERTICAL

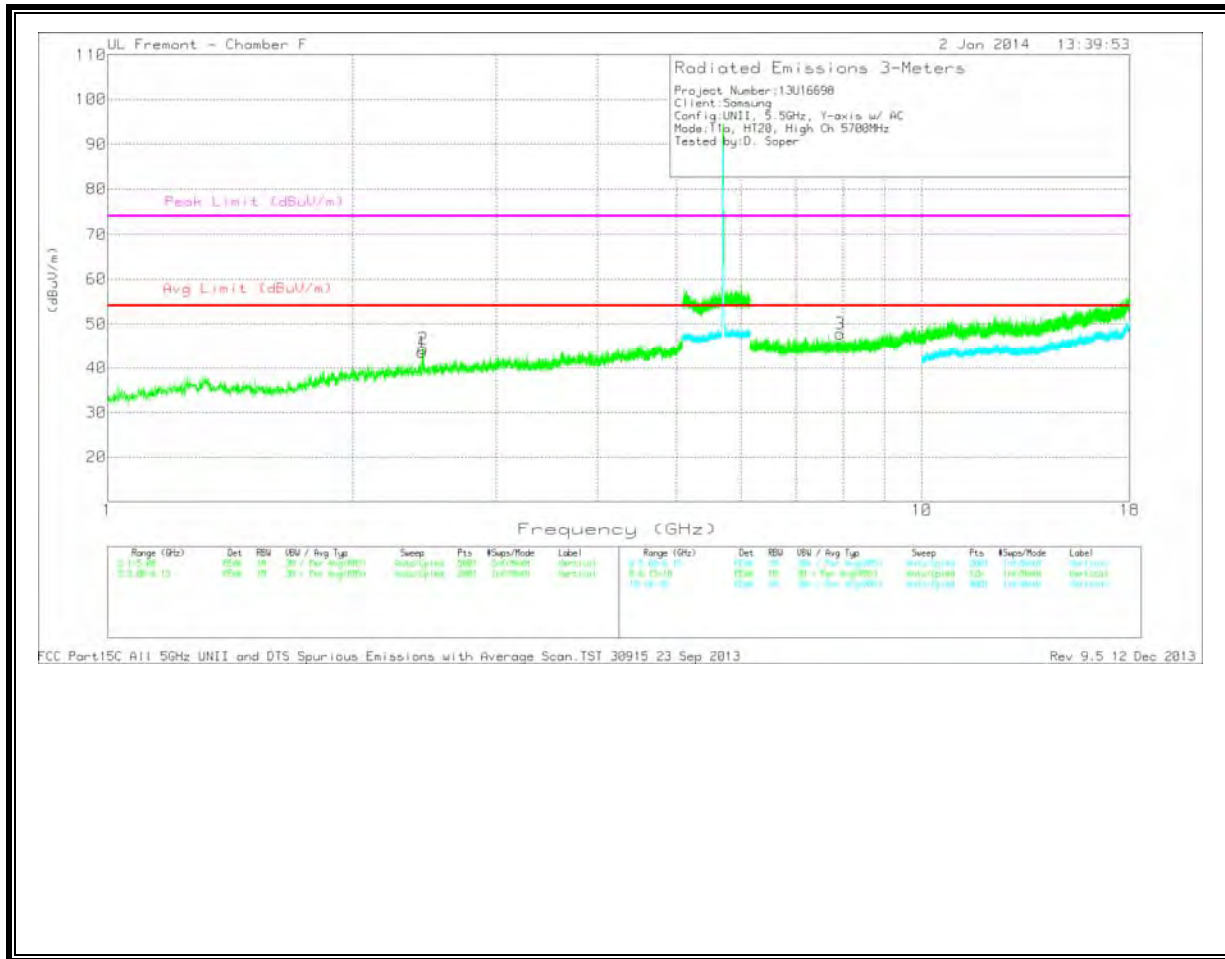



Trace Markers



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/5 GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.435	42	PK	32.3	-30.7	43.6	53.97	-10.37	74	-30.4	0-360	201	V
2	2.441	42.81	PK	32.3	-30.7	44.41	53.97	-9.56	74	-29.59	0-360	201	V

PK - Peak detector



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/6 GHz HPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	7.939	37.91	PK	35.9	-26	47.81	53.97	-6.16	74	-26.19	0-360	101	V
4	9.463	34.65	PK	37.1	-23.1	48.65	53.97	-5.32	74	-25.35	0-360	200	H

11.3.3. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.5 GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

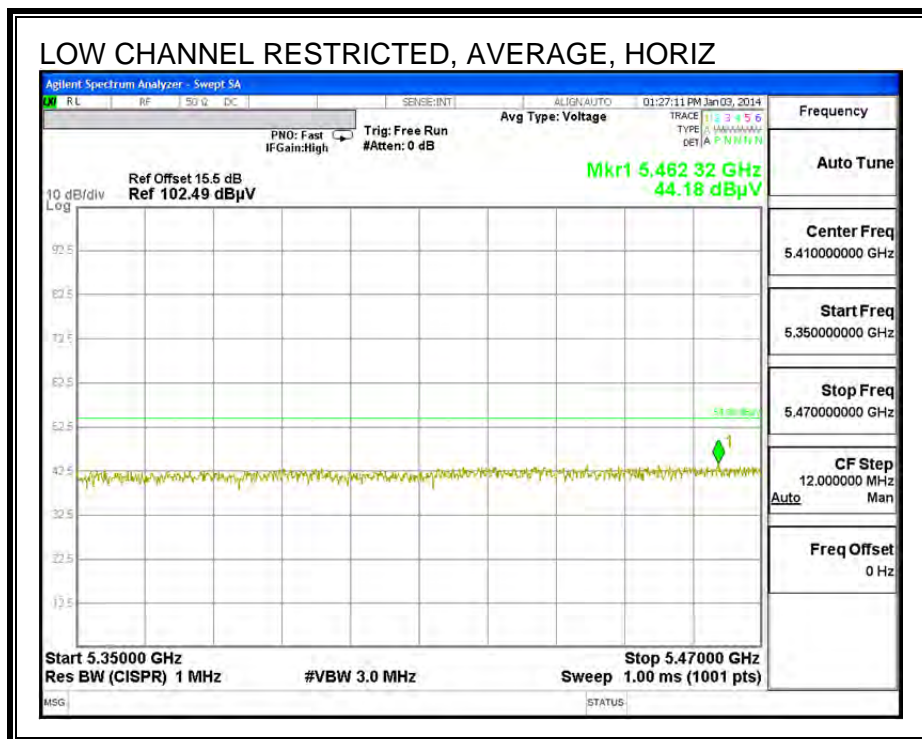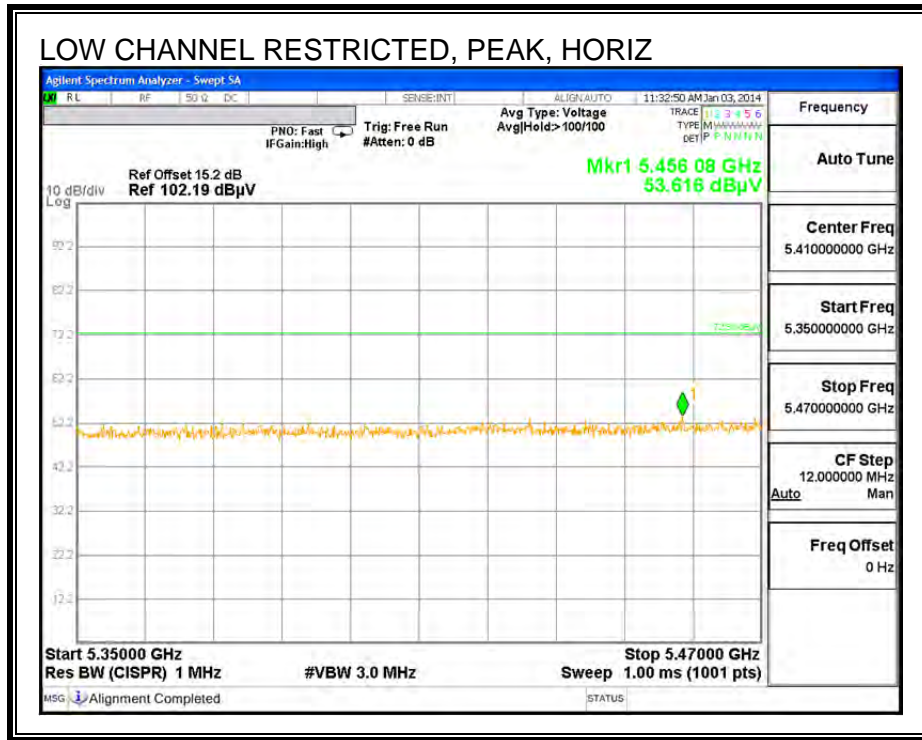

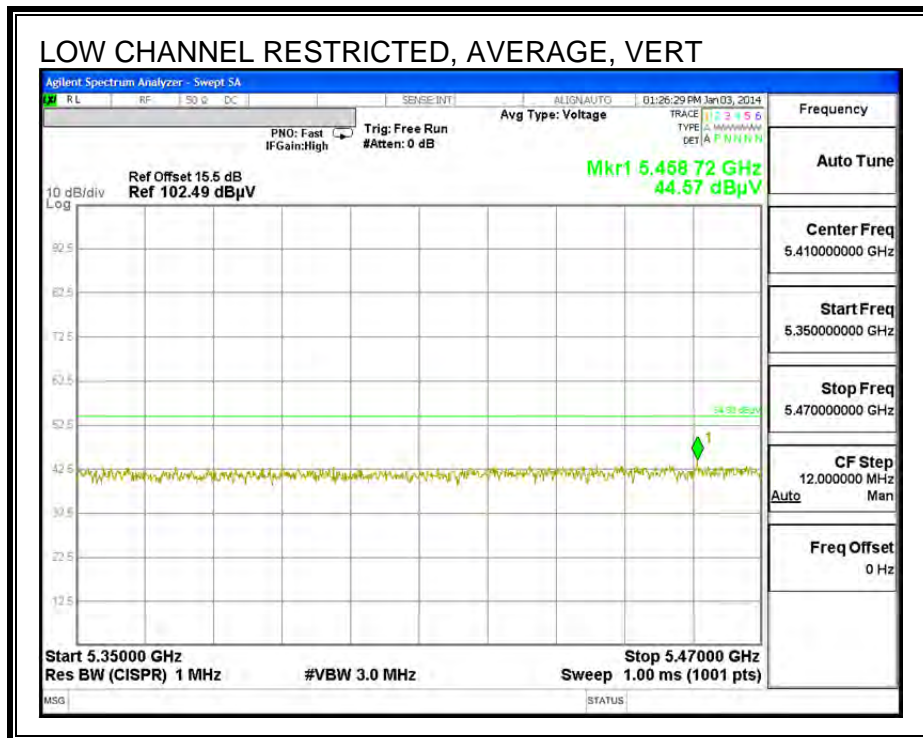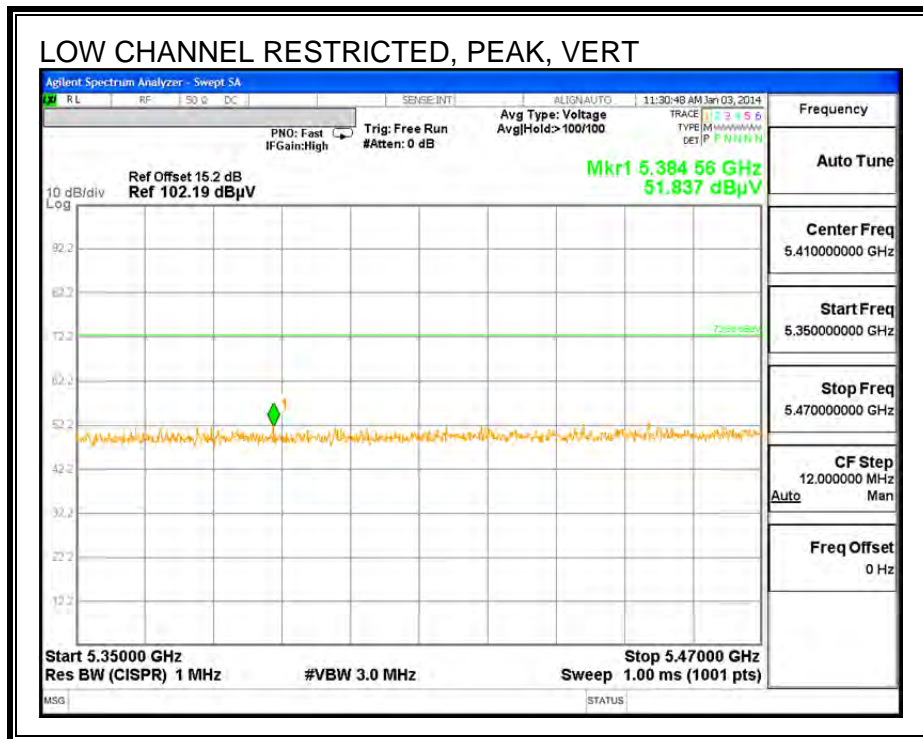



AUTHORIZED BANDEDGE (HIGH CHANNEL)

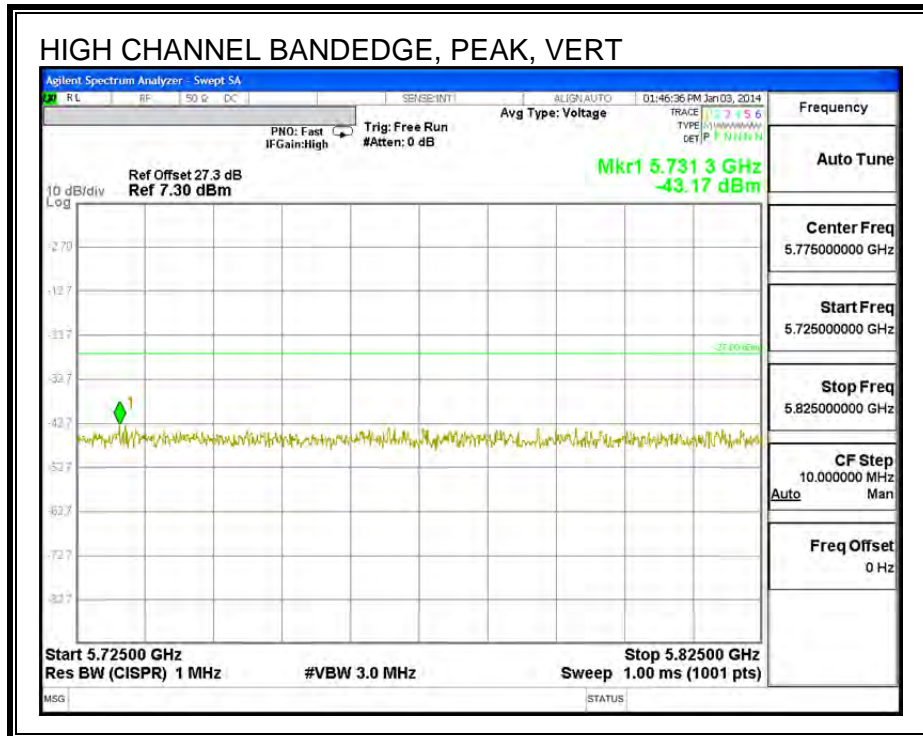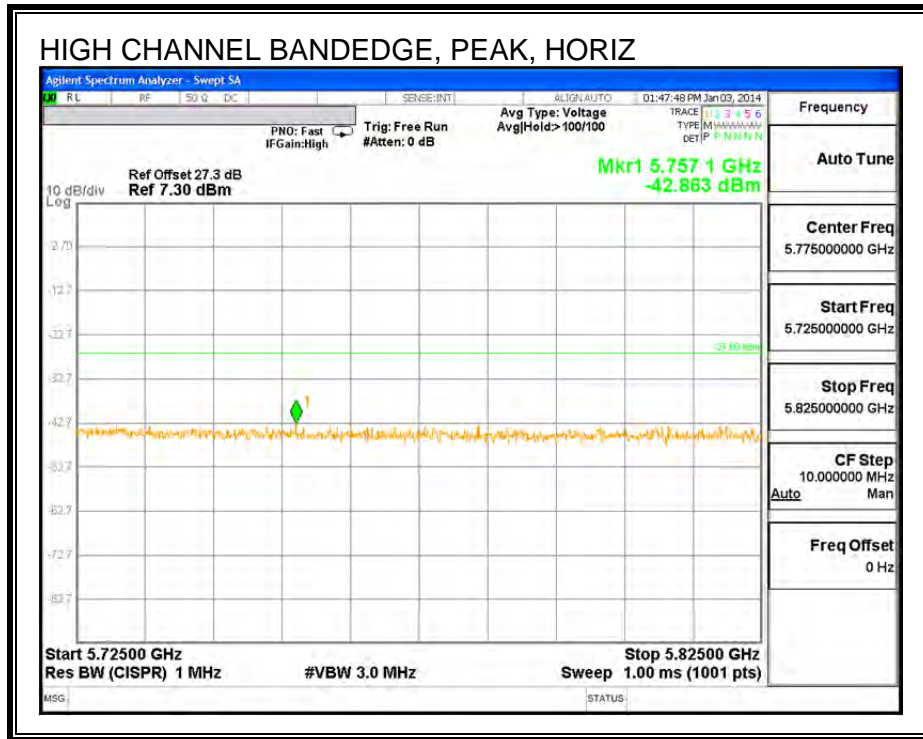

HARMONICS AND SPURIOUS EMISSIONS

**LOW CHANNEL
 HORIZONTAL**

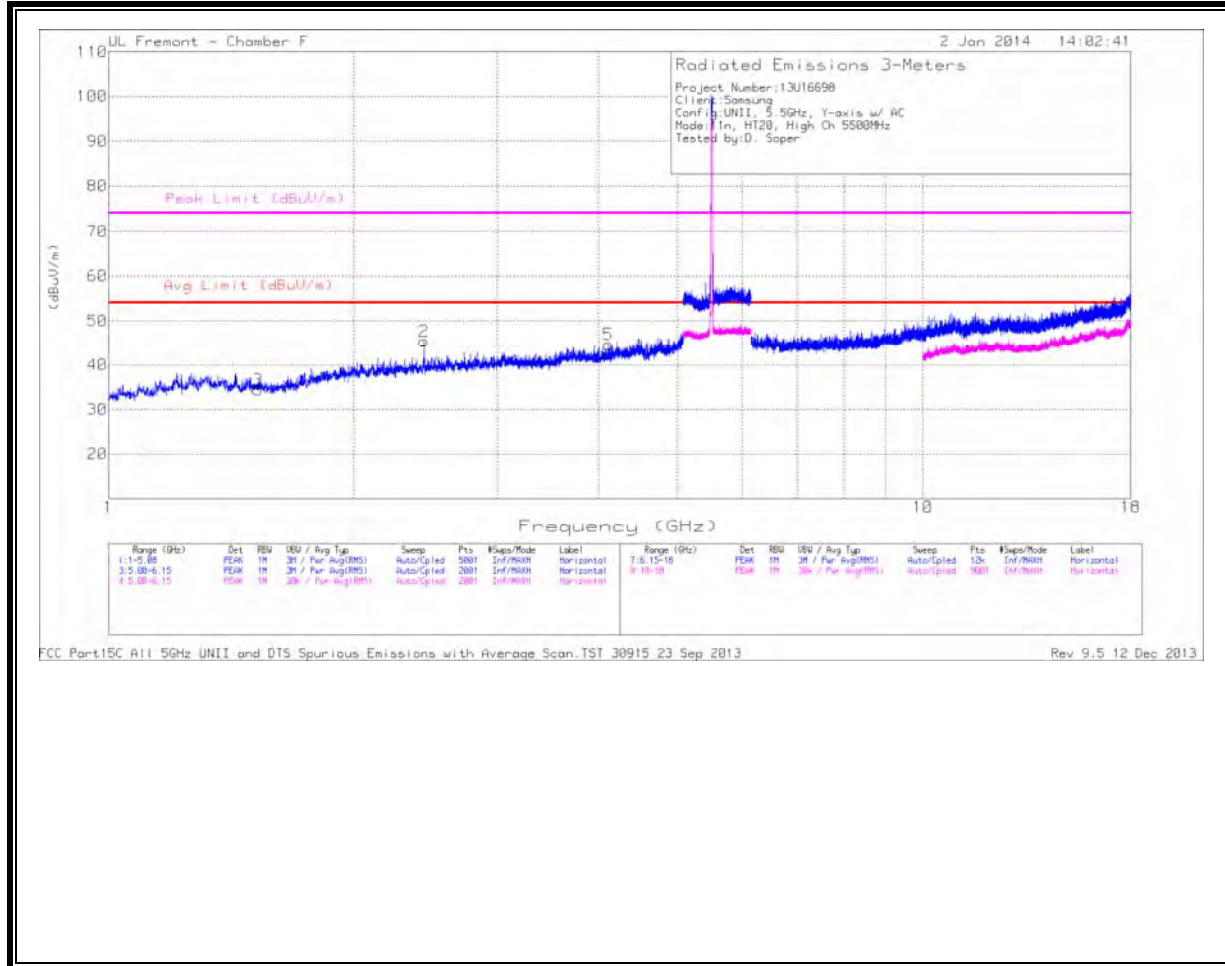


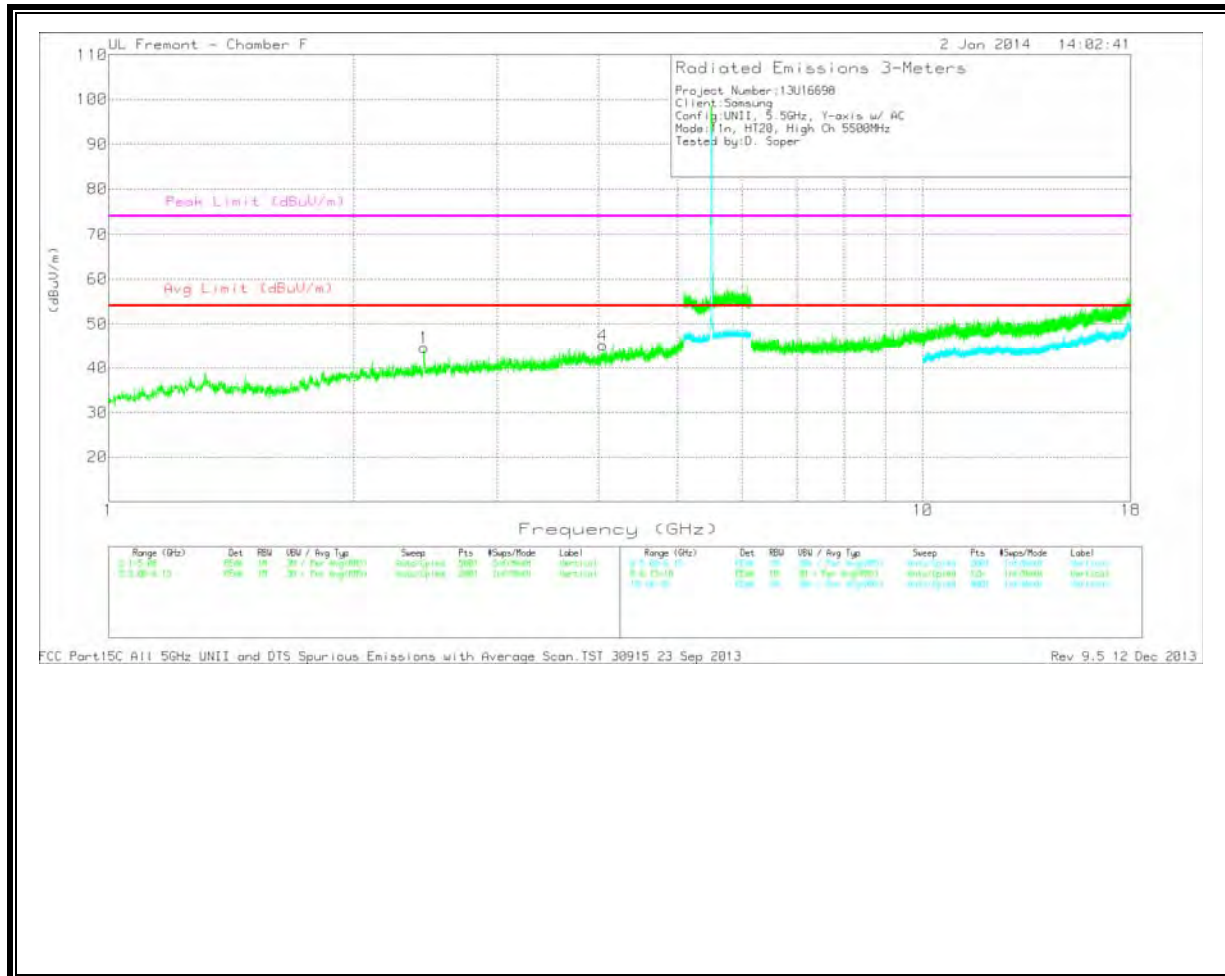


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/5 GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	1.526	37.3	PK	28.6	-31.5	34.4	53.97	-19.57	74	-39.6	0-360	101	H
2	2.439	43.8	PK	32.3	-30.7	45.4	53.97	-8.57	74	-28.6	0-360	199	H
1	2.44	43.05	PK	32.3	-30.7	44.65	53.97	-9.32	74	-29.35	0-360	201	V
4	4.048	39.9	PK	33.4	-28.1	45.2	53.97	-8.77	74	-28.8	0-360	101	V
5	4.108	40.09	PK	33.4	-28.8	44.69	53.97	-9.28	74	-29.31	0-360	101	H

MID CHANNEL
HORIZONTAL

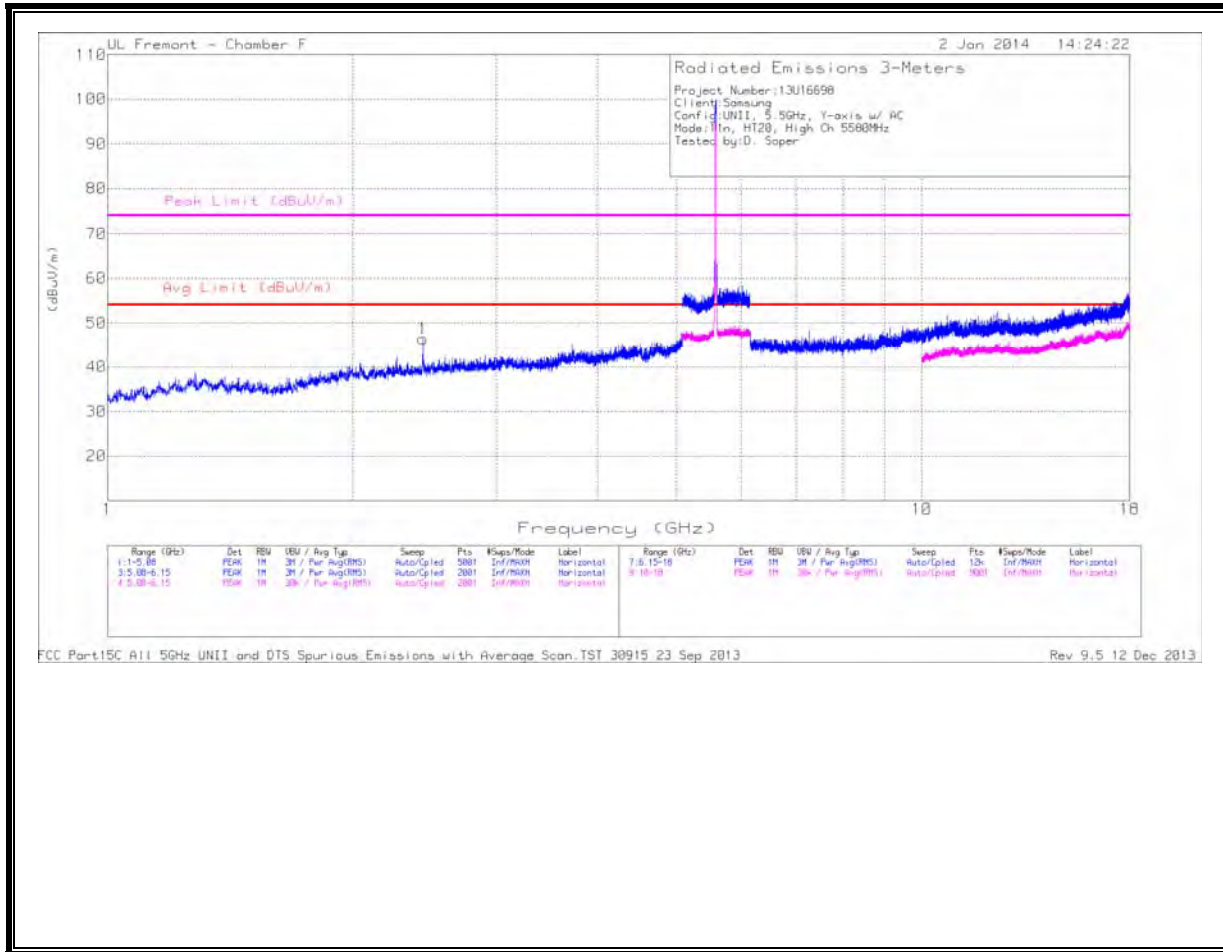


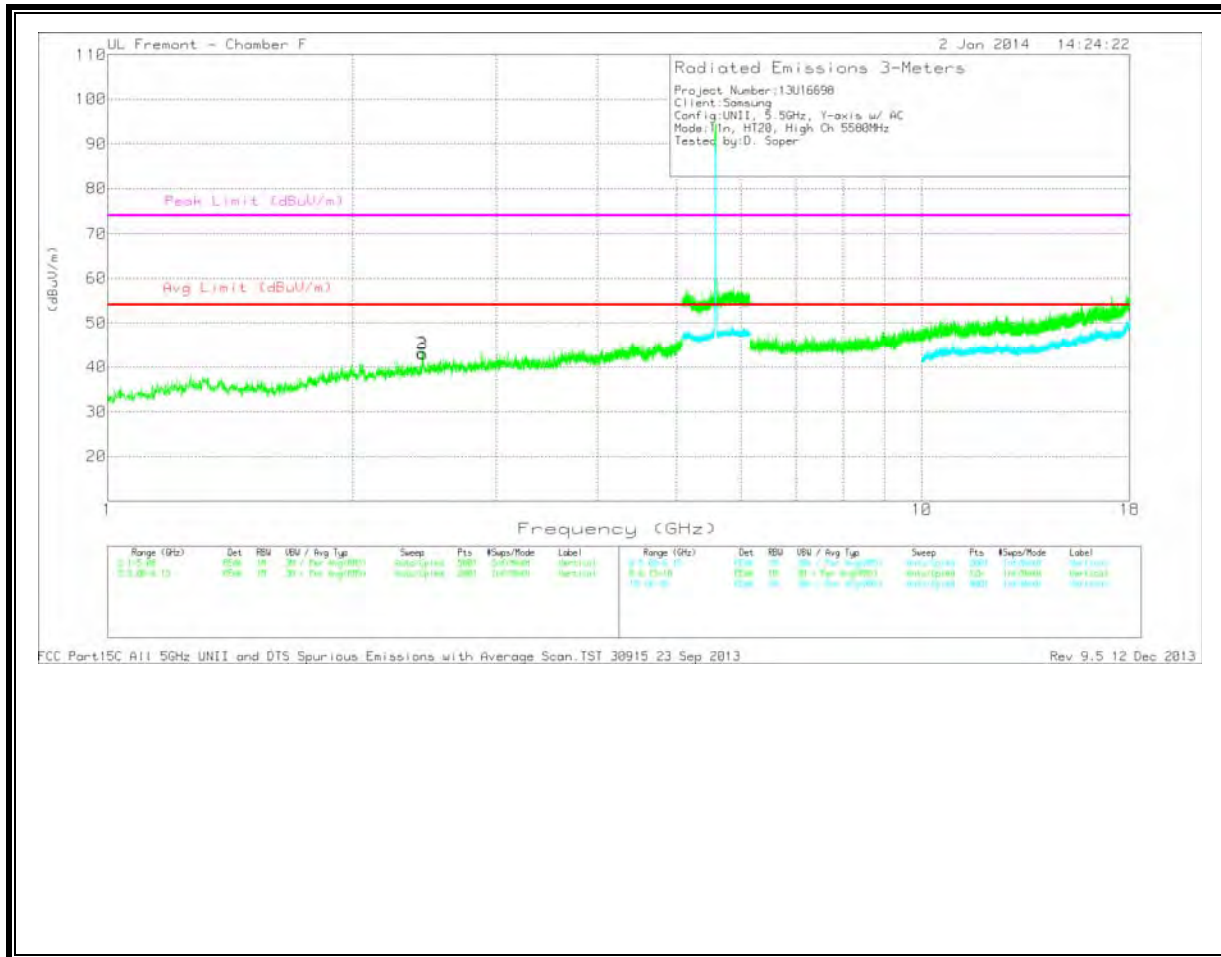


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/5 GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	2.433	41.68	PK	32.2	-30.7	43.18	53.97	-10.79	74	-30.82	0-360	101	V
3	2.438	41.3	PK	32.3	-30.7	42.9	53.97	-11.07	74	-31.1	0-360	201	V
1	2.439	44.86	PK	32.3	-30.7	46.46	53.97	-7.51	74	-27.54	0-360	200	H

HIGH CHANNEL
HORIZONTAL

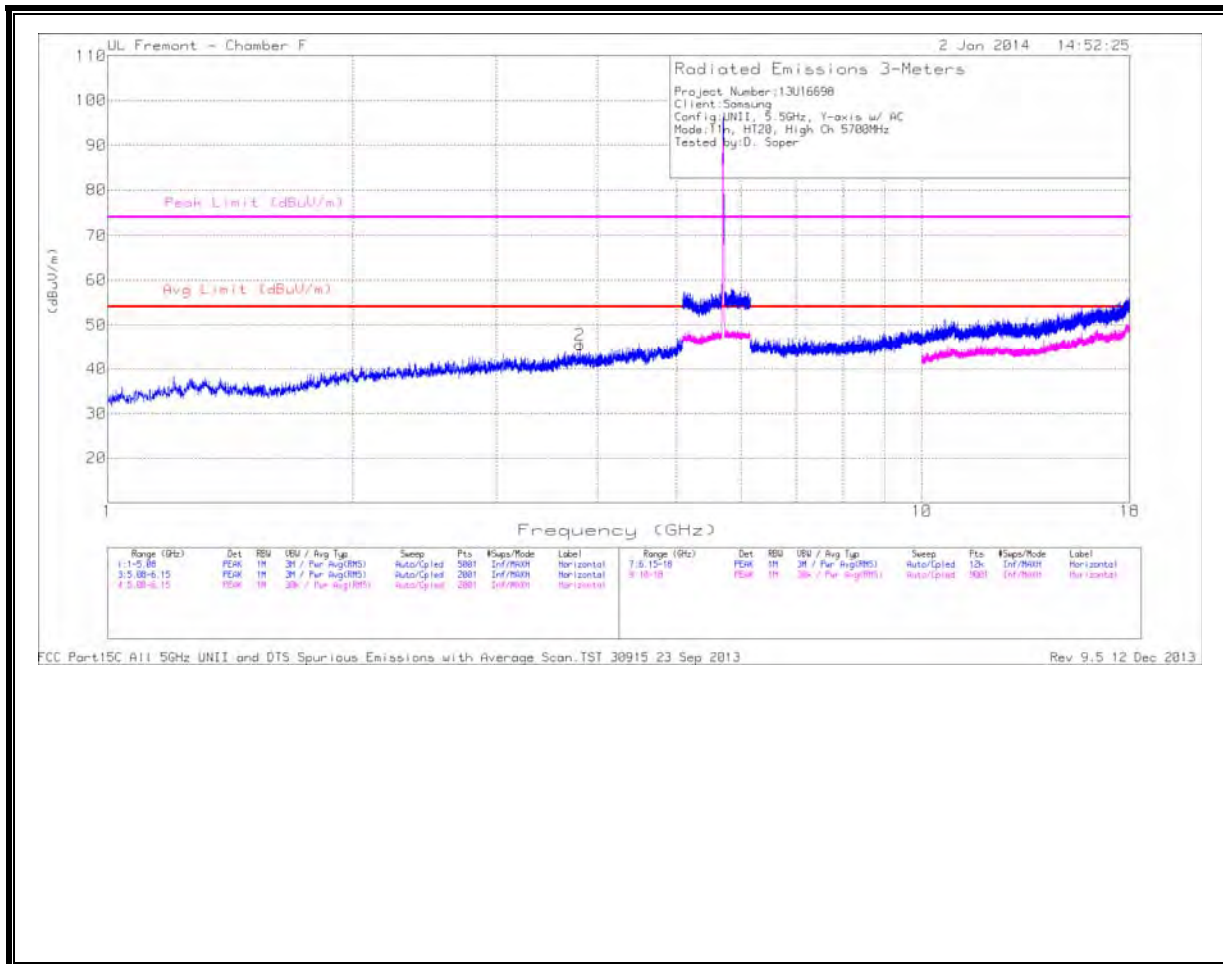

VERTICAL


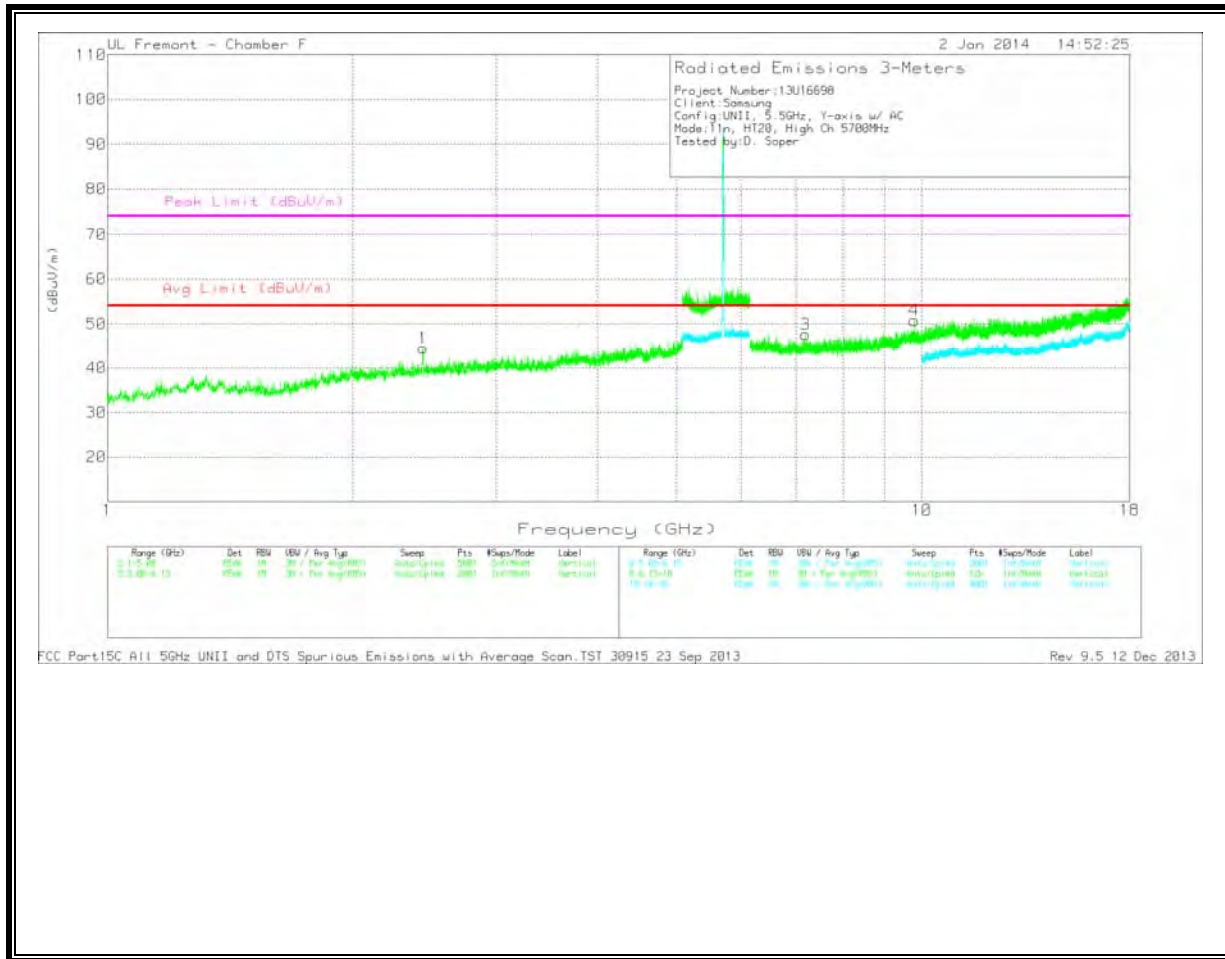


Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/5 GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.44	42.93	PK	32.3	-30.7	44.53	53.97	-9.44	74	-29.47	0-360	101	V
2	3.801	41.31	PK	33.6	-29.4	45.51	53.97	-8.46	74	-28.49	0-360	101	H


PK - Peak detector

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/6 GHz HPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	7.2	37.95	PK	35.7	-26	47.65	53.97	-6.32	74	-26.35	0-360	101	V
4	9.784	36.42	PK	37.5	-23.1	50.82	53.97	-3.15	74	-23.18	0-360	101	V

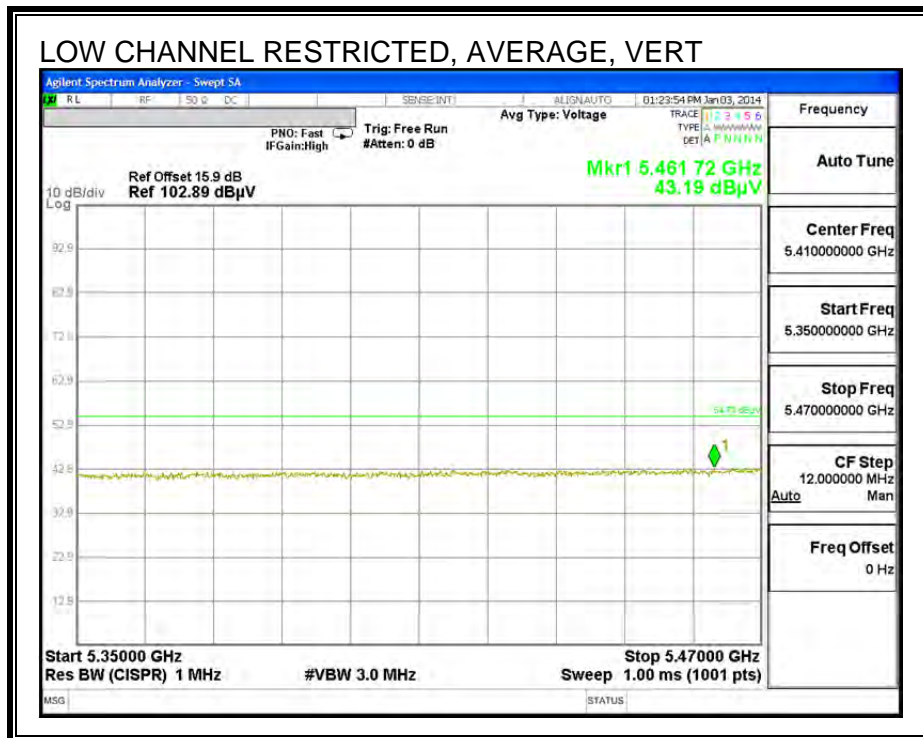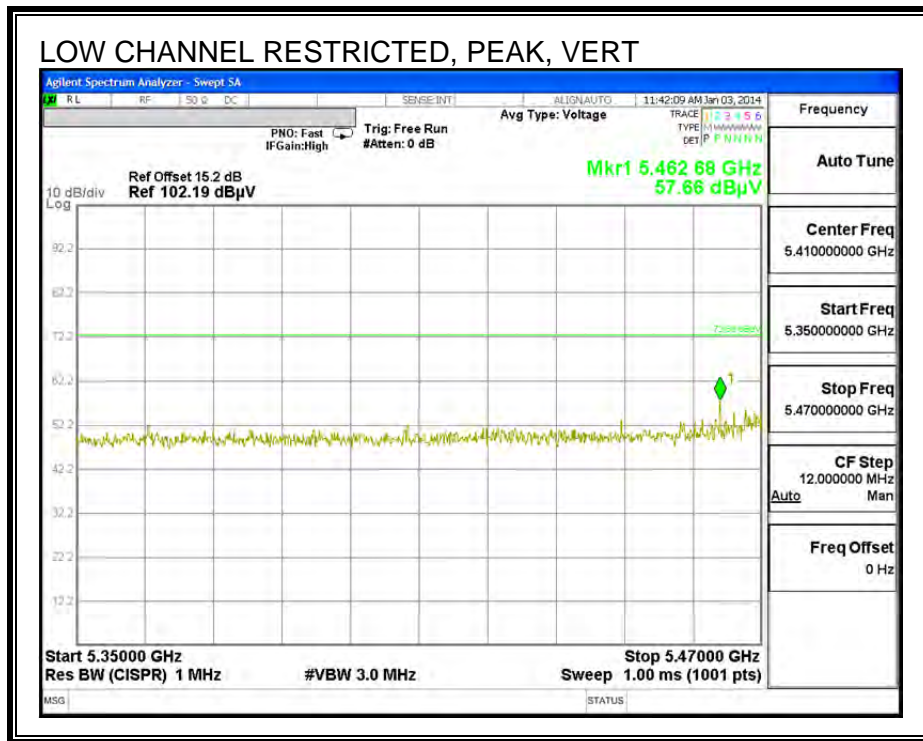


AUTHORIZED BANDEDGE (HIGH CHANNEL)

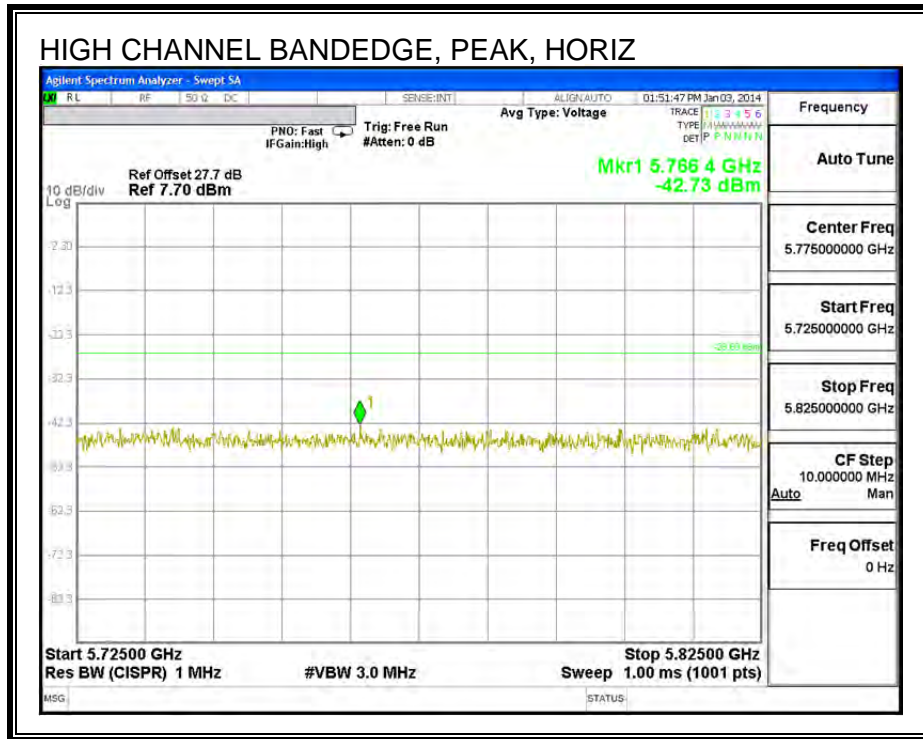


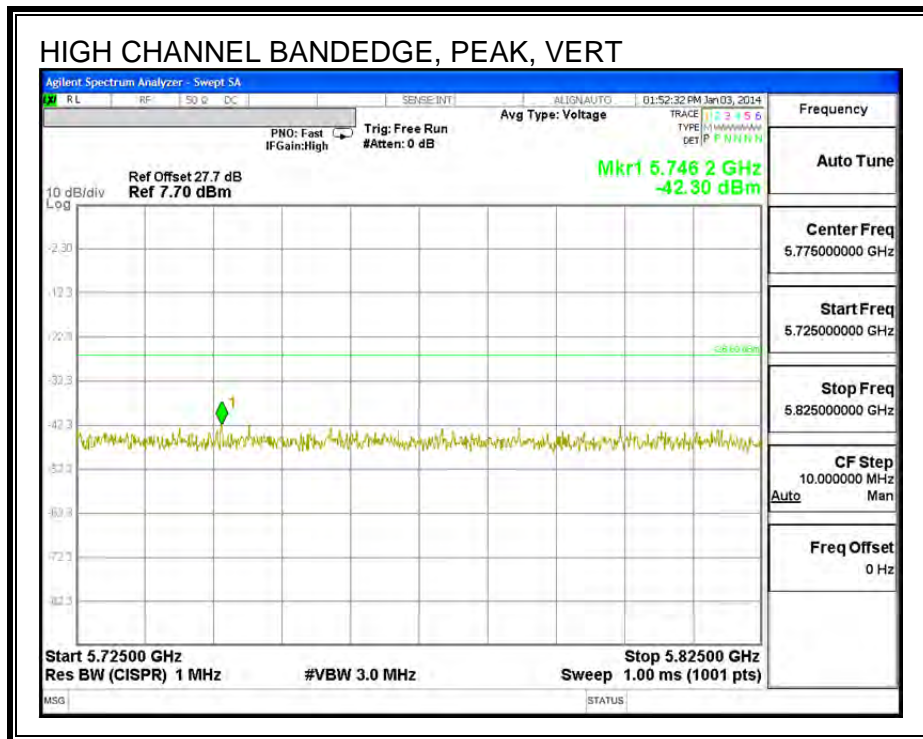

HARMONICS AND SPURIOUS EMISSIONS

**LOW CHANNEL
 HORIZONTAL**

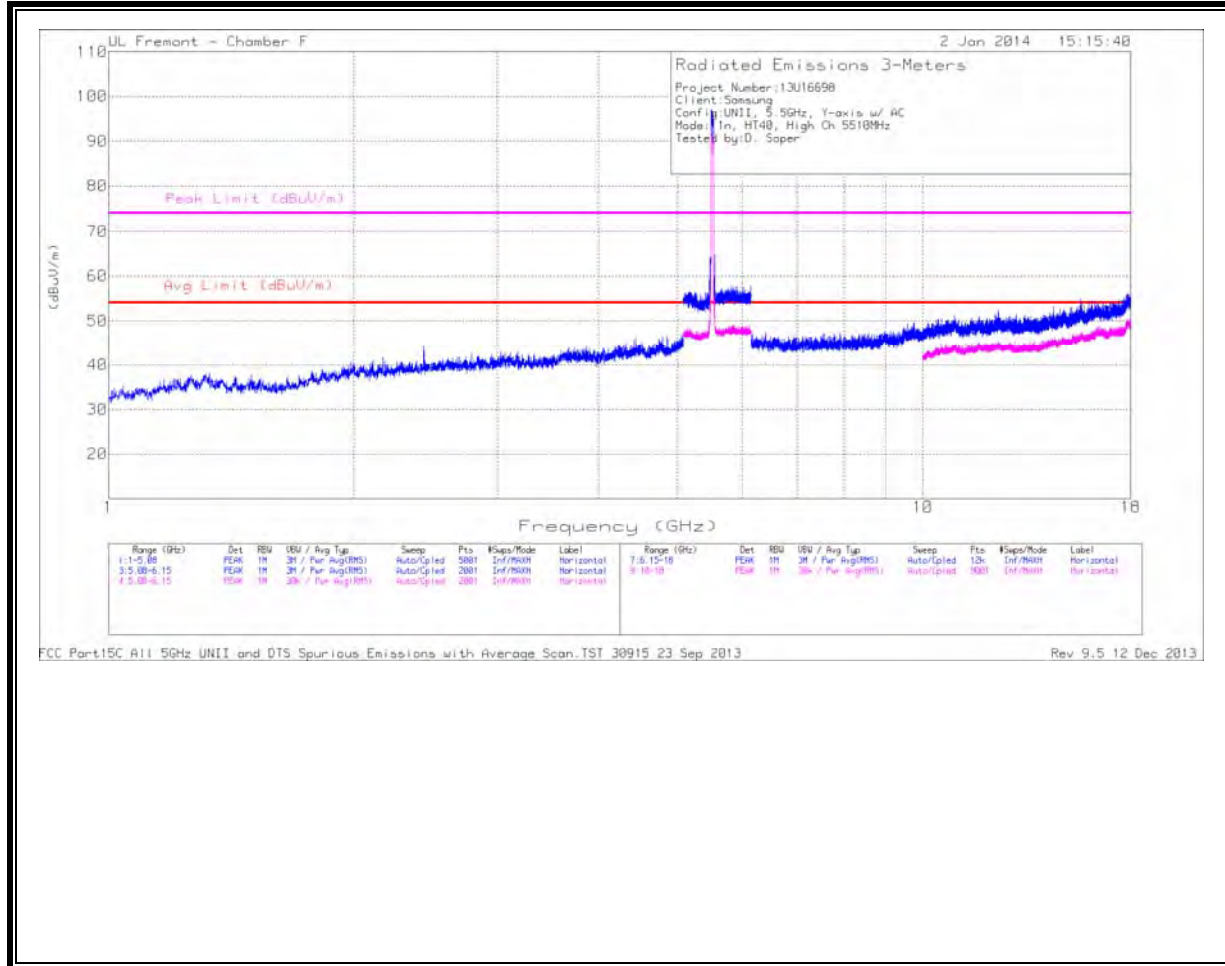

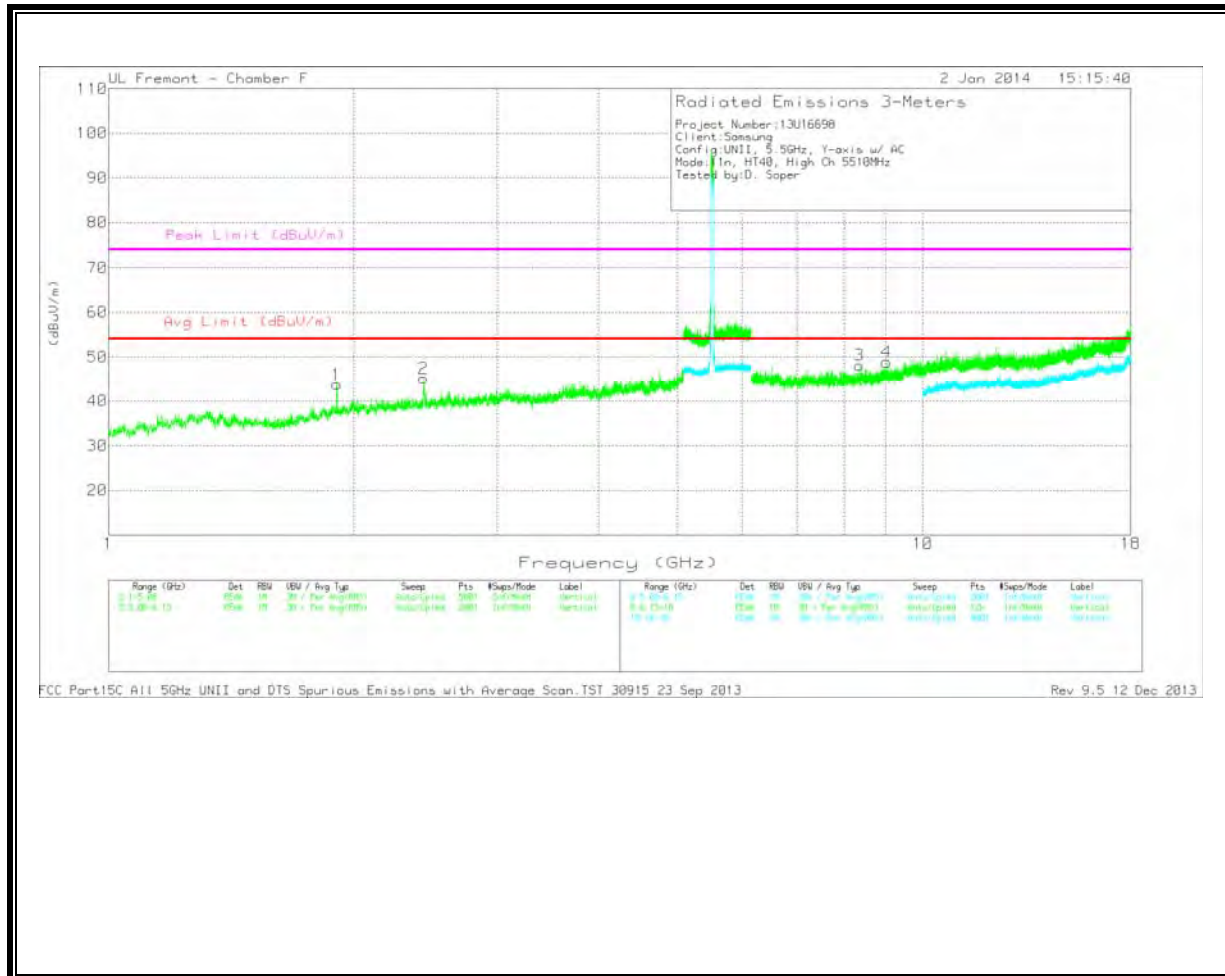


Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/5 GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.907	43.79	PK	31.2	-31.2	43.79	53.97	-10.18	74	-30.21	0-360	201	V
2	2.436	43.54	PK	32.3	-30.7	45.14	53.97	-8.83	74	-28.86	0-360	201	V

PK - Peak detector

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/6 GHz HPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	8.362	37.17	PK	36	-25	48.17	53.97	-5.8	74	-25.83	0-360	201	V
4	9.025	36.47	PK	36.4	-24	48.87	53.97	-5.1	74	-25.13	0-360	201	V

MID CHANNEL
HORIZONTAL

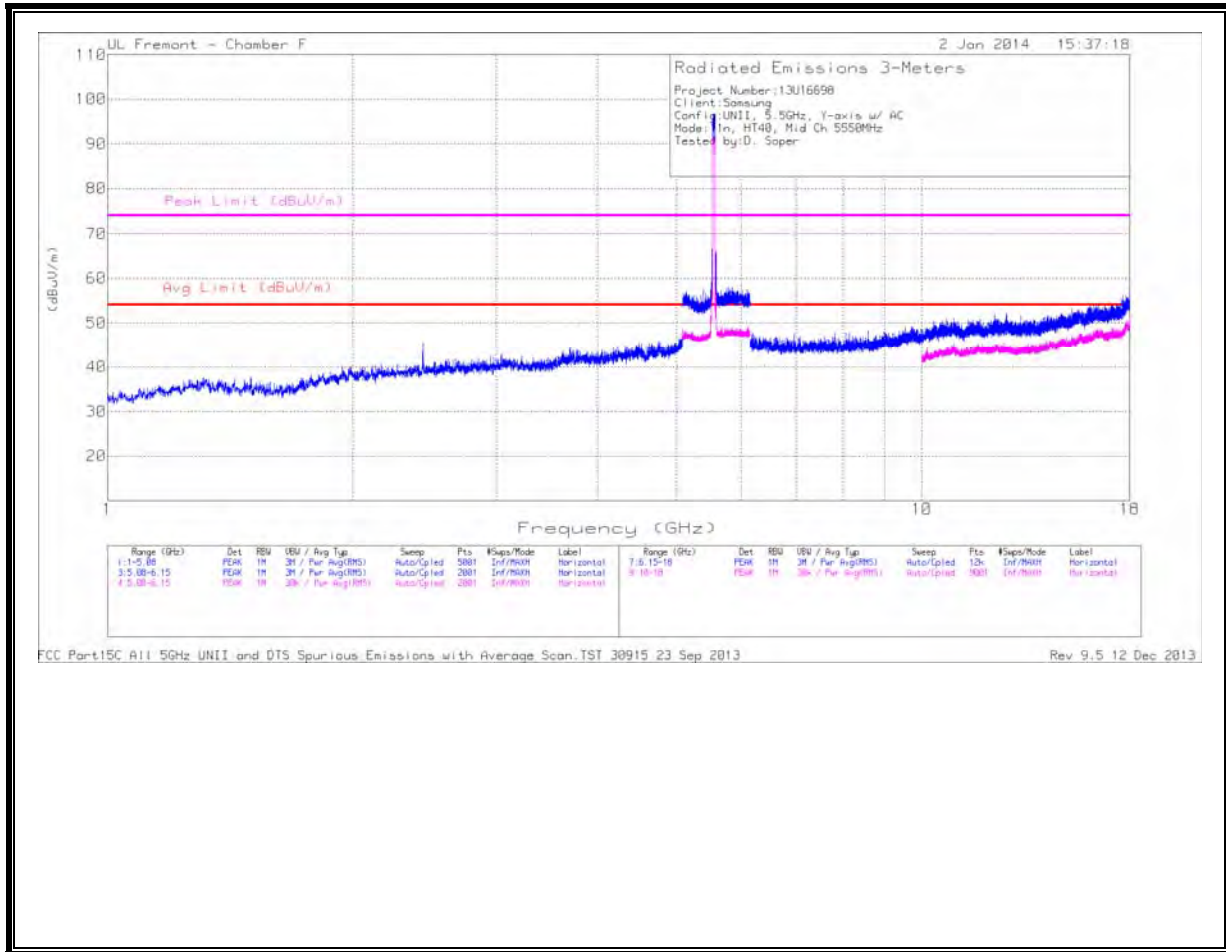

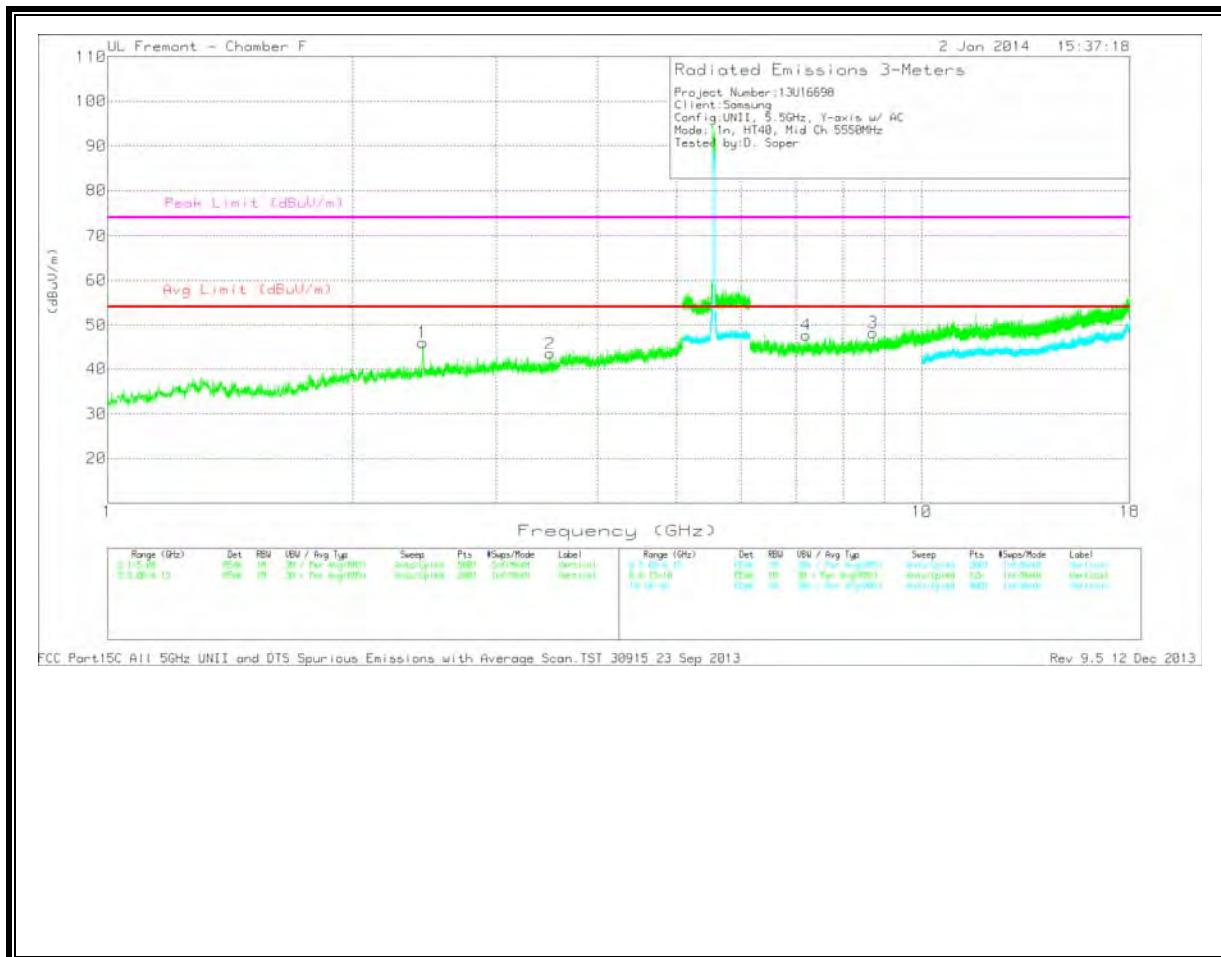

MID CHANNEL DATA


Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/5 GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.438	44.46	PK	32.3	-30.7	46.06	53.97	-7.91	74	-27.94	0-360	201	V
2	3.496	39.69	PK	33.2	-29.4	43.49	53.97	-10.48	74	-30.51	0-360	101	V

PK - Peak detector

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/6 GHz HPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	7.209	37.85	PK	35.7	-25.8	47.75	53.97	-6.22	74	-26.25	0-360	101	V
3	8.714	36.59	PK	36.2	-24.5	48.29	53.97	-5.68	74	-25.71	0-360	201	V

HIGH CHANNEL
HORIZONTAL


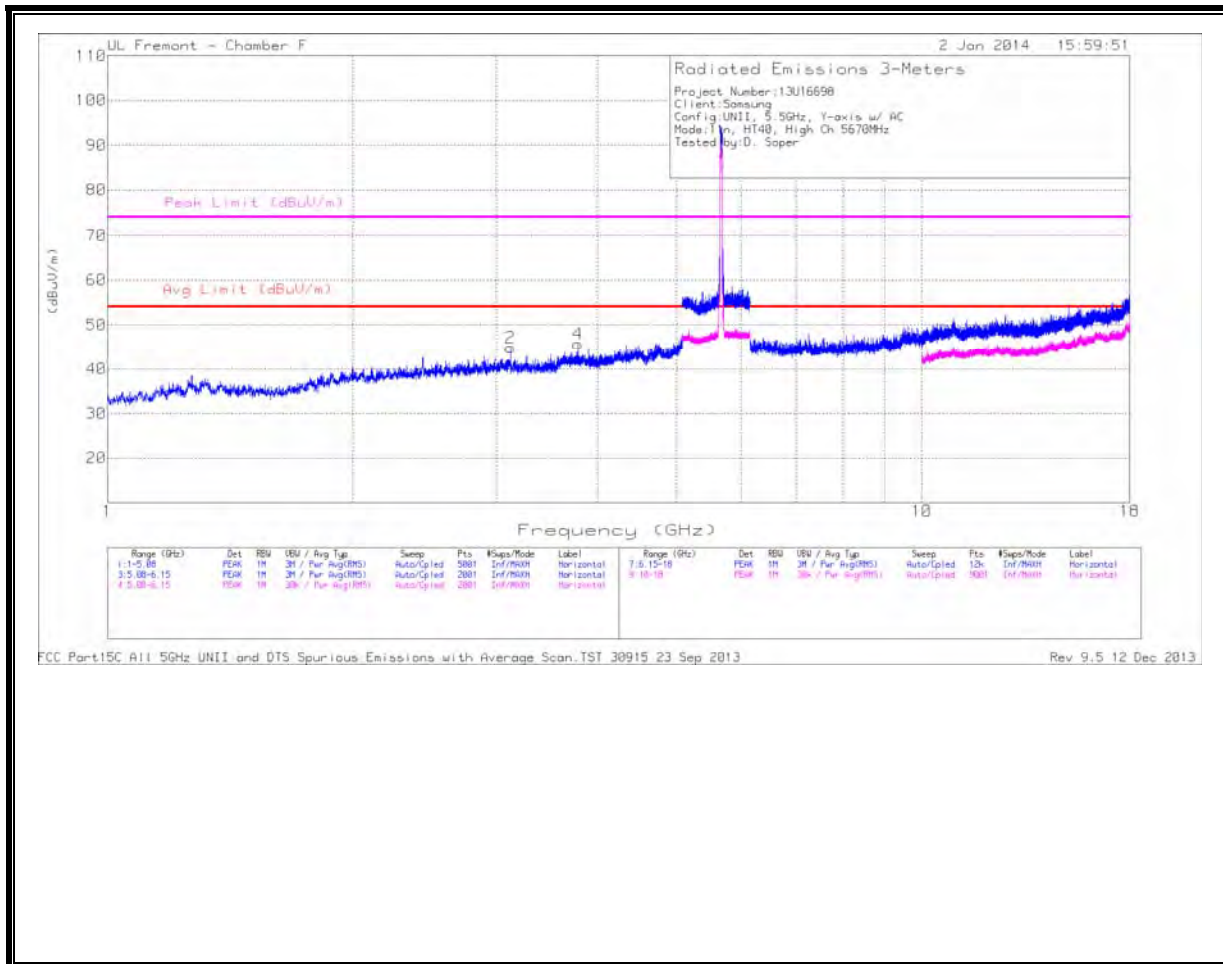



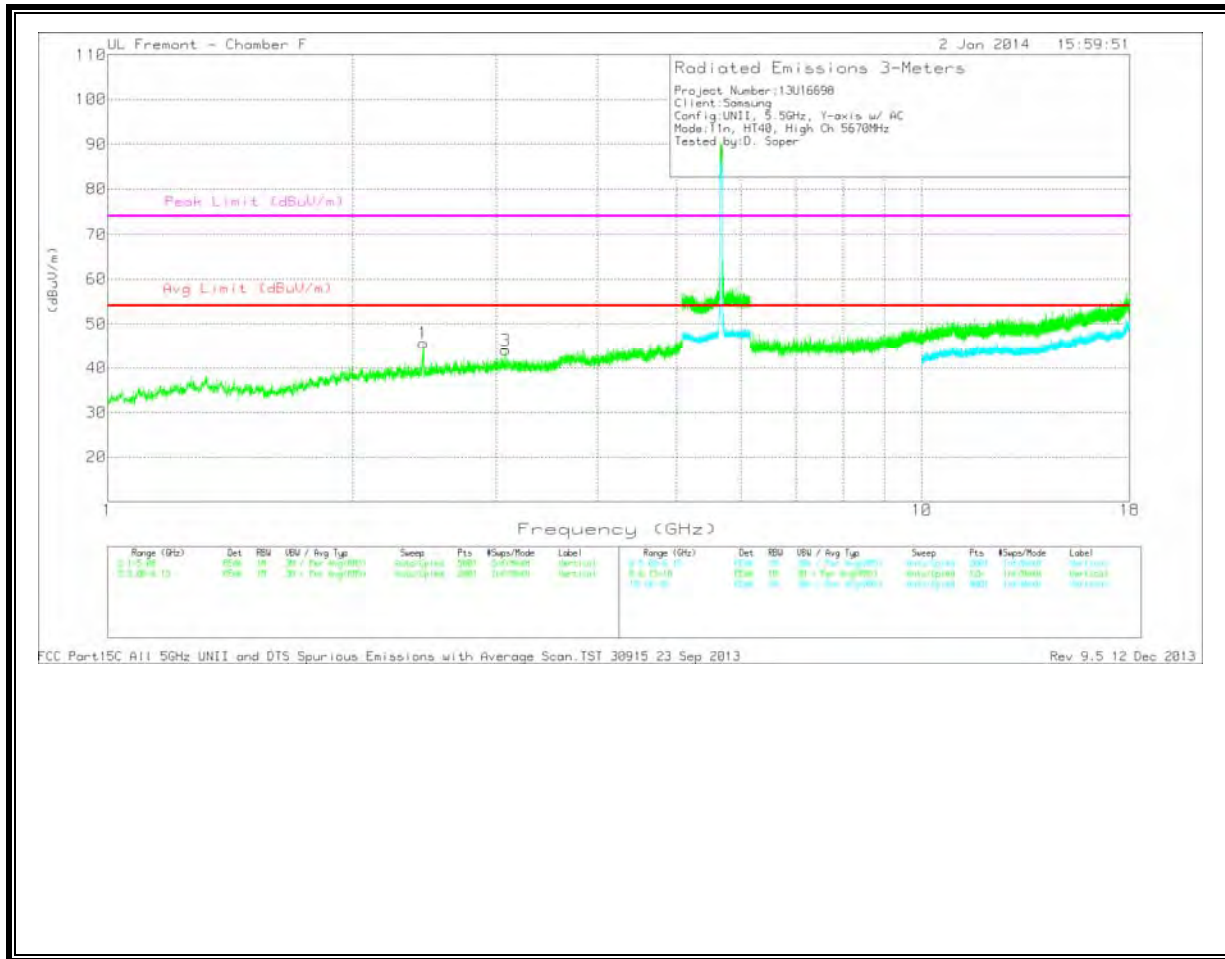


Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/5 GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.442	44.13	PK	32.3	-30.7	45.73	53.97	-8.24	74	-28.27	0-360	201	V
3	3.082	40.02	PK	33.3	-29.3	44.02	53.97	-9.95	74	-29.98	0-360	101	V
2	3.125	40.99	PK	33.3	-29.4	44.89	53.97	-9.08	74	-29.11	0-360	200	H
4	3.781	41.82	PK	33.6	-29.7	45.72	53.97	-8.25	74	-28.28	0-360	101	H

**11.3.7. TX ABOVE 1 GHz 802.11ac HT80 MODE IN THE 5.5 GHz BAND
 RESTRICTED BANDEDGE (LOW CHANNEL)**

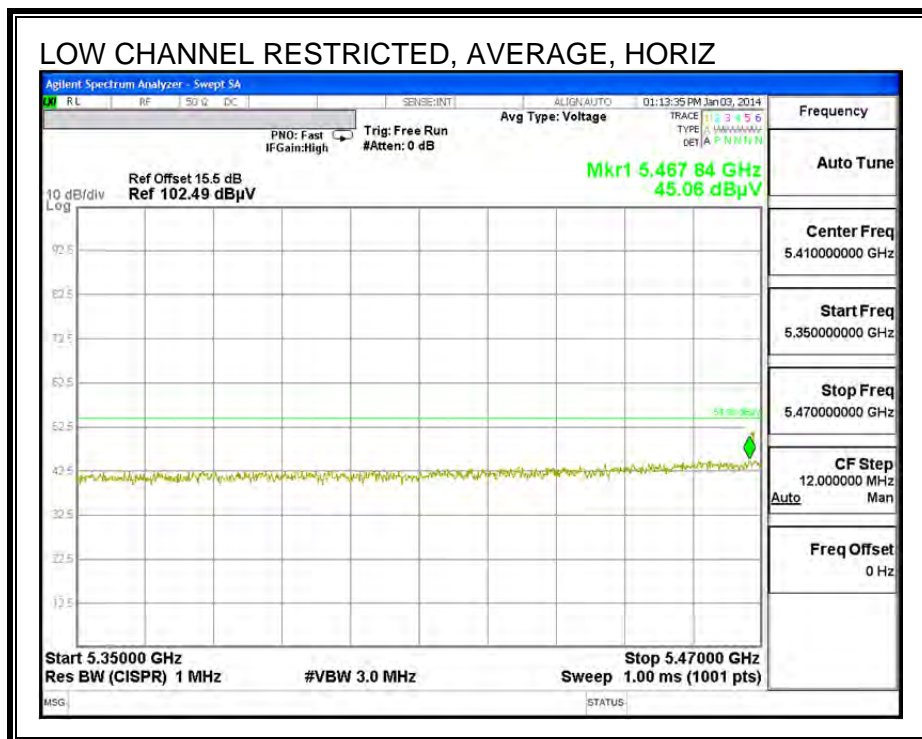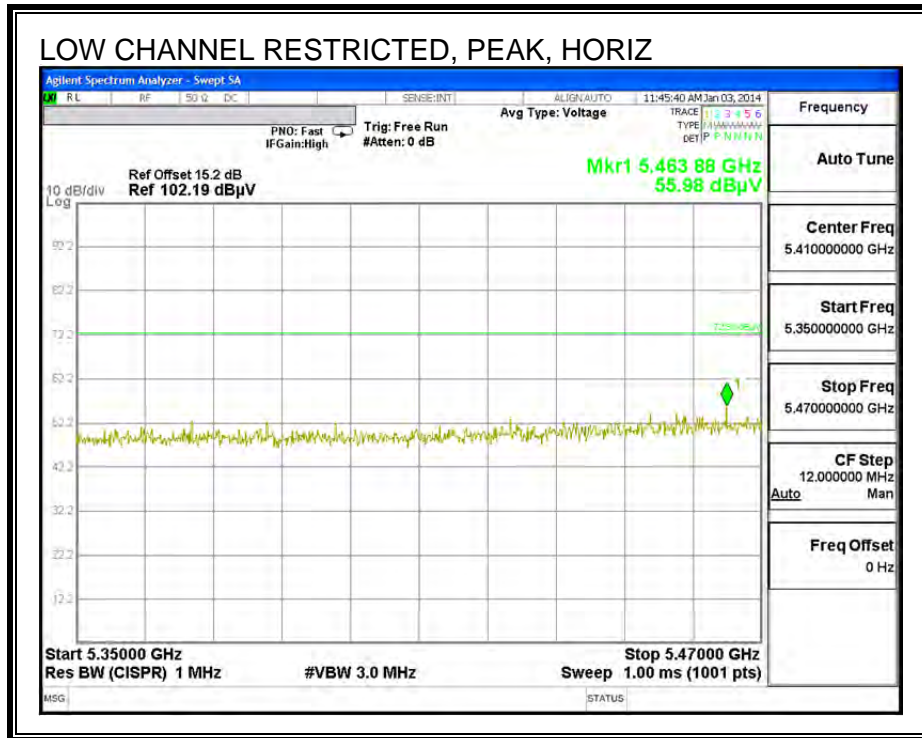

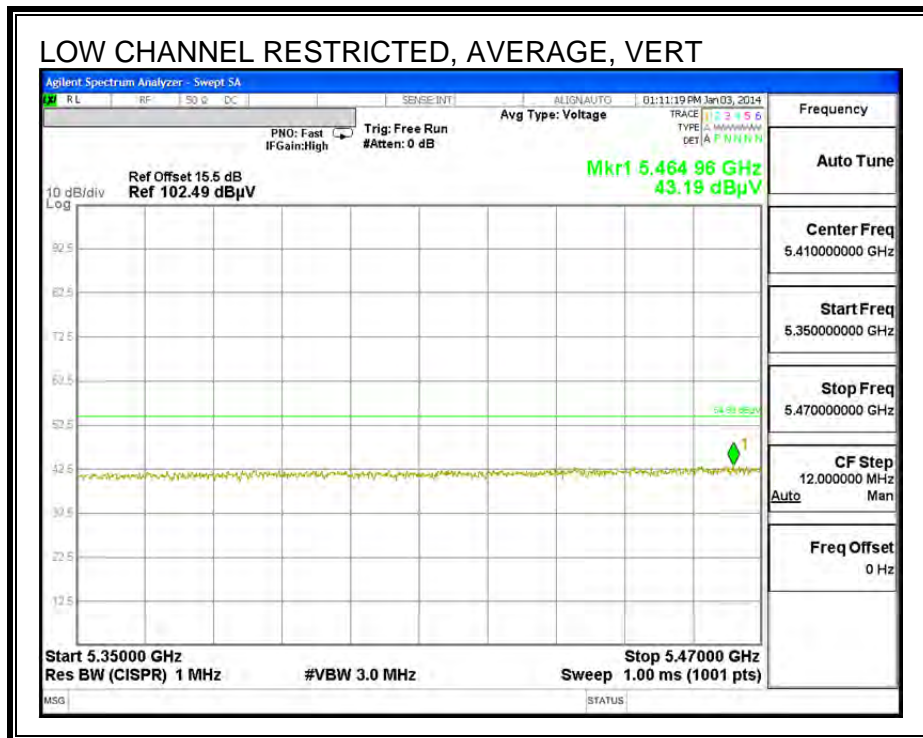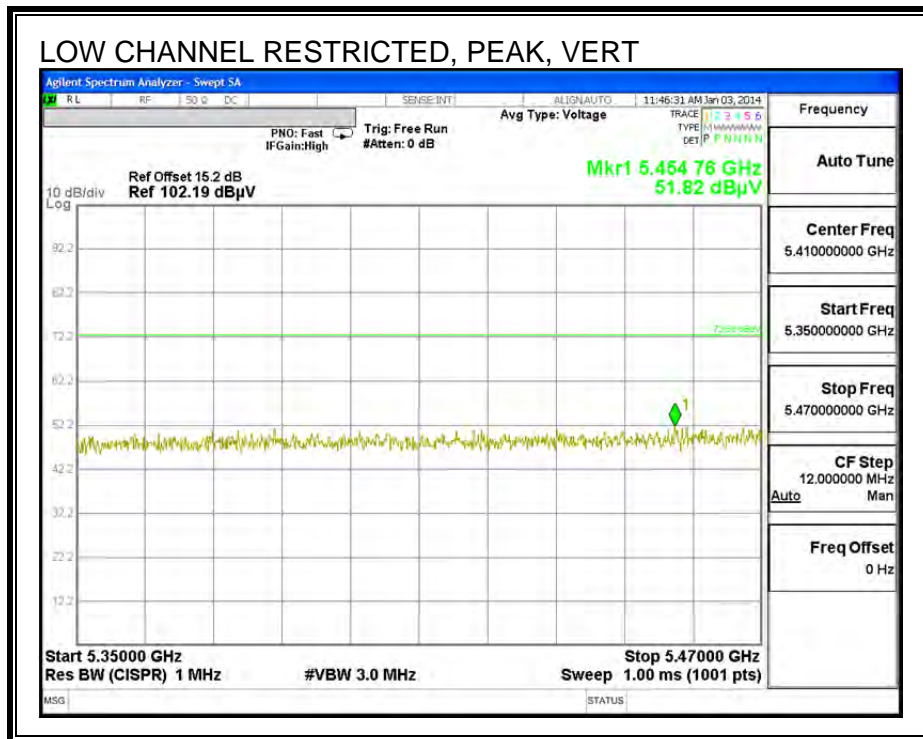



AUTHORIZED BANDEDGE (HIGH CHANNEL)

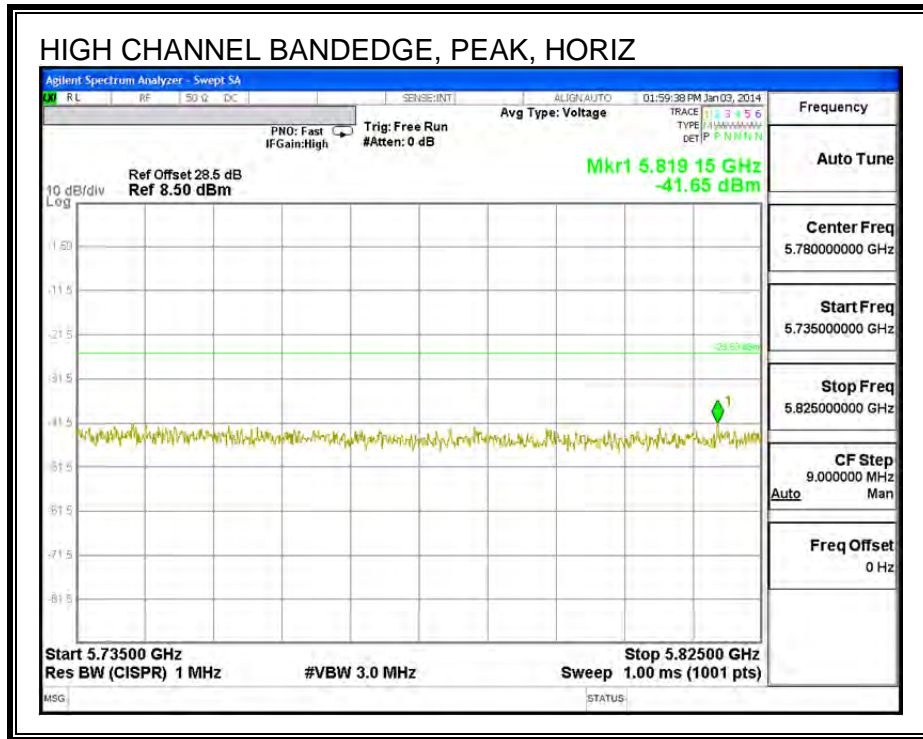

HARMONICS AND SPURIOUS EMISSIONS

**LOW CHANNEL
 HORIZONTAL**

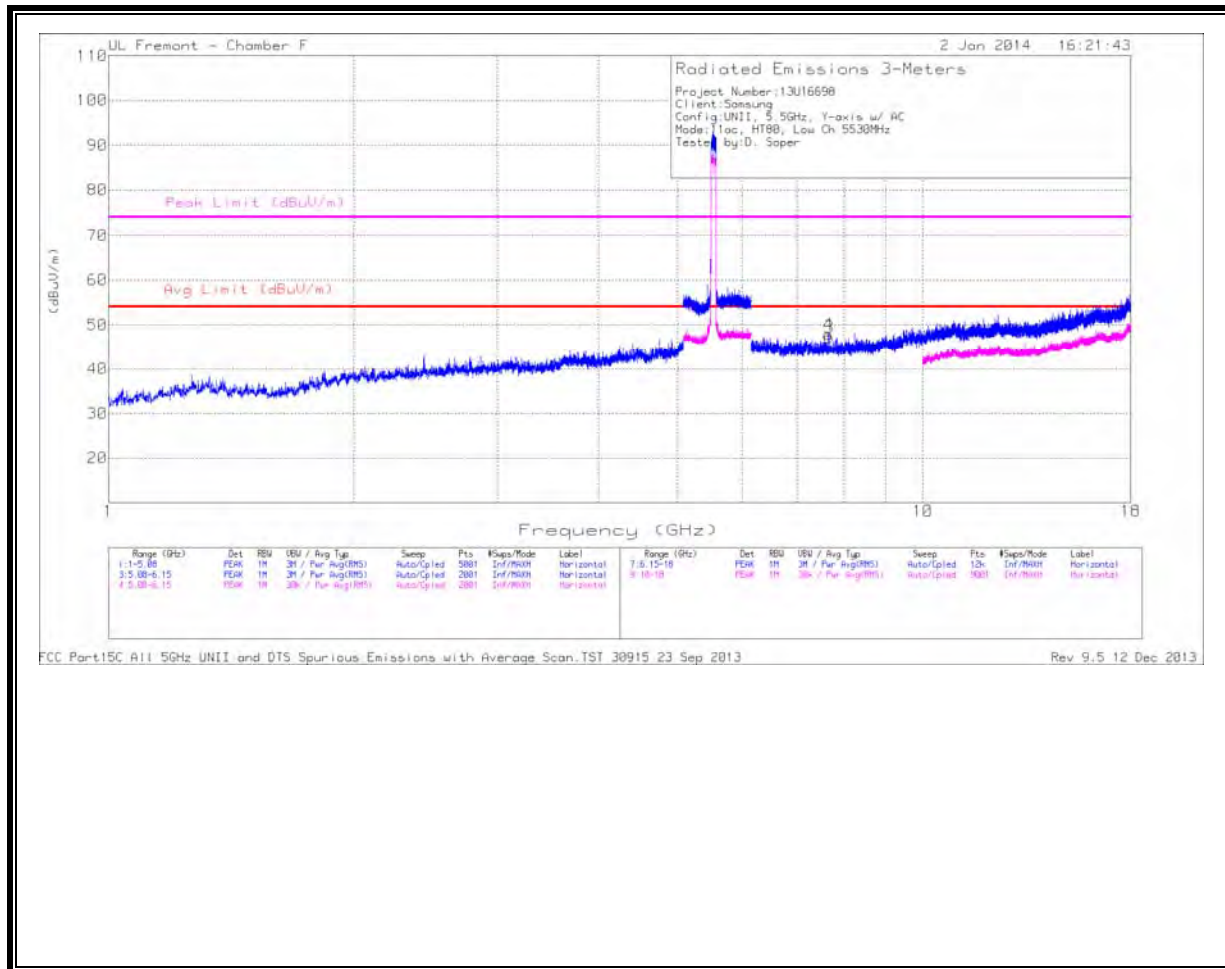

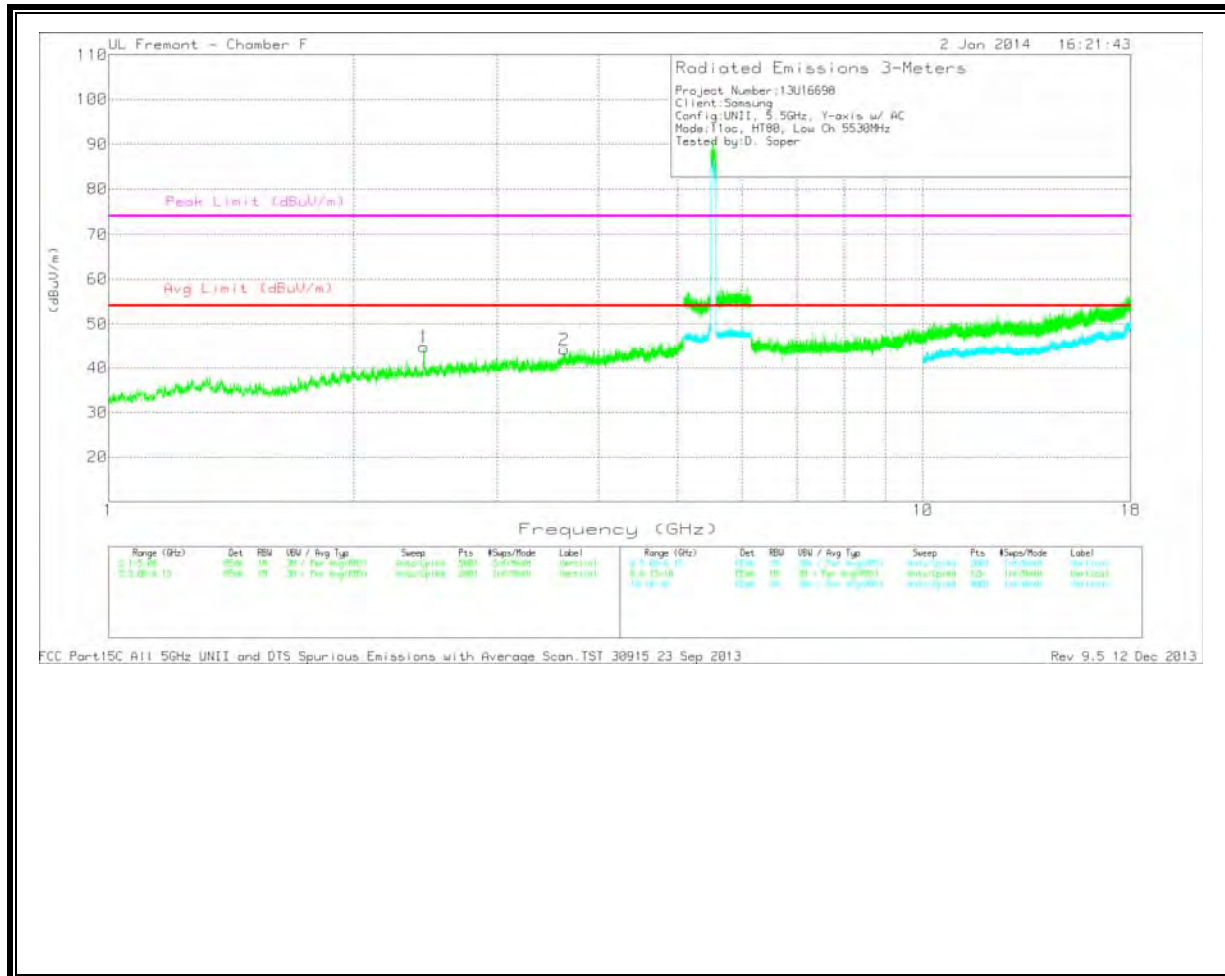

LOW CHANNEL DATA


Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/5 GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.439	43.22	PK	32.3	-30.7	44.82	53.97	-9.15	74	-29.18	0-360	101	V
2	3.628	39.9	PK	33.7	-29.4	44.2	53.97	-9.77	74	-29.8	0-360	201	V

PK - Peak detector

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/6 GHz HPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	7.66	38.33	PK	35.9	-26.4	47.83	53.97	-6.14	74	-26.17	0-360	101	H
3	7.669	37.66	PK	35.9	-26.3	47.26	53.97	-6.71	74	-26.74	0-360	200	H

HIGH CHANNEL
 HORIZONTAL

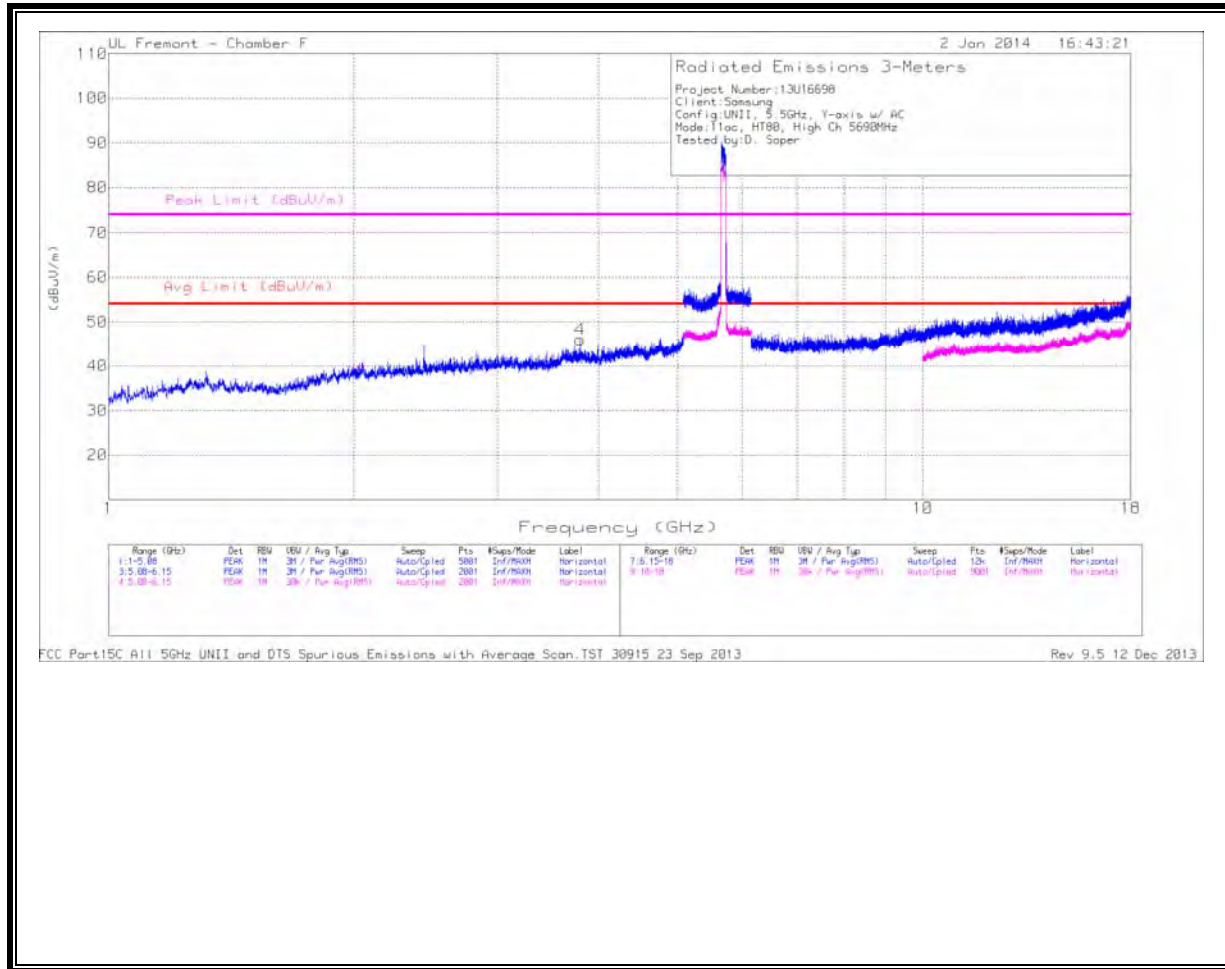

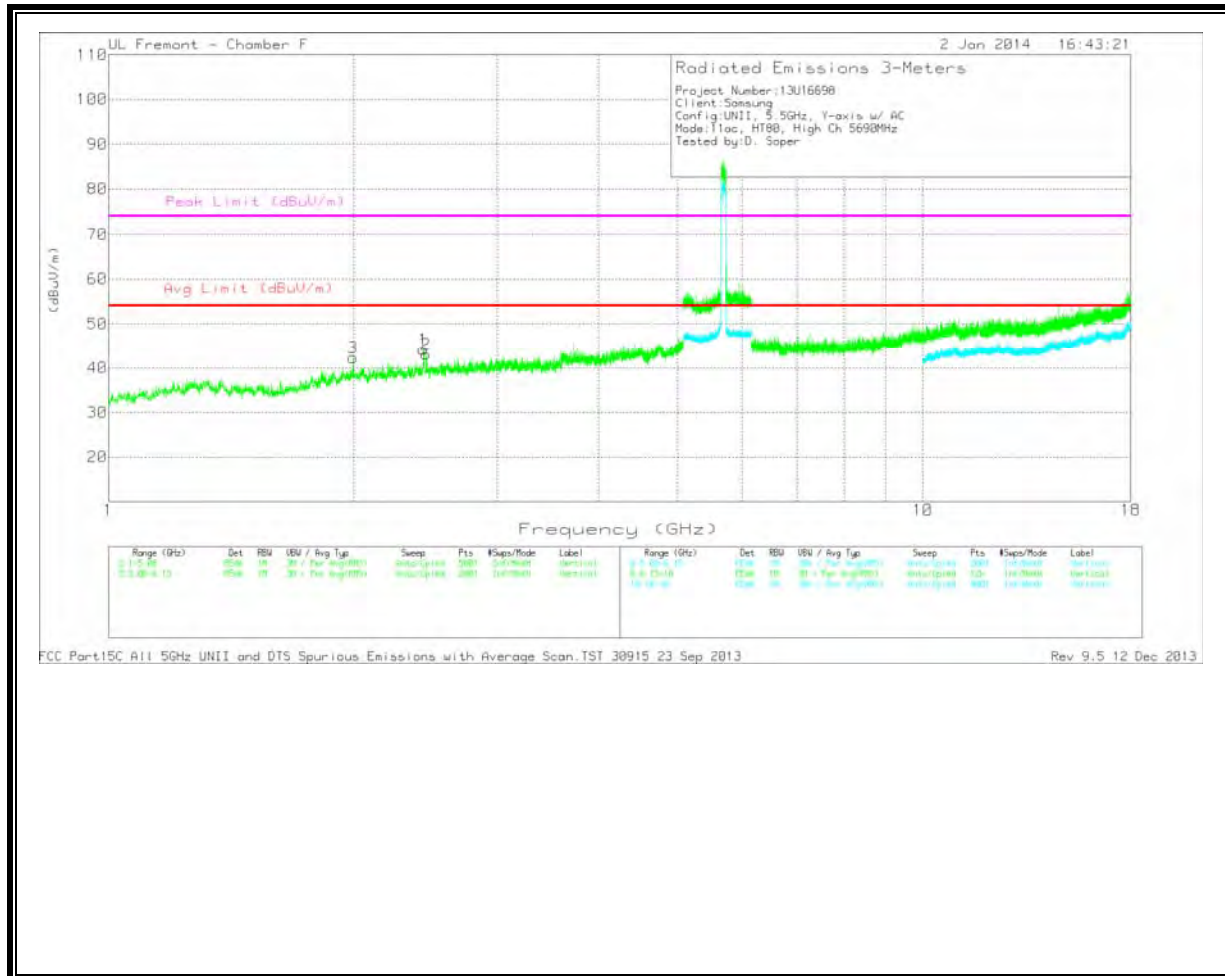


HIGH CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/5 GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	1.996	41.65	PK	31.6	-30.9	42.35	53.97	-11.62	74	-31.65	0-360	101	V
1	2.435	42.65	PK	32.3	-30.7	44.25	53.97	-9.72	74	-29.75	0-360	201	V
2	2.454	41.37	PK	32.3	-30.6	43.07	53.97	-10.9	74	-30.93	0-360	201	V
4	3.794	41.84	PK	33.6	-29.4	46.04	53.97	-7.93	74	-27.96	0-360	101	H

12. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

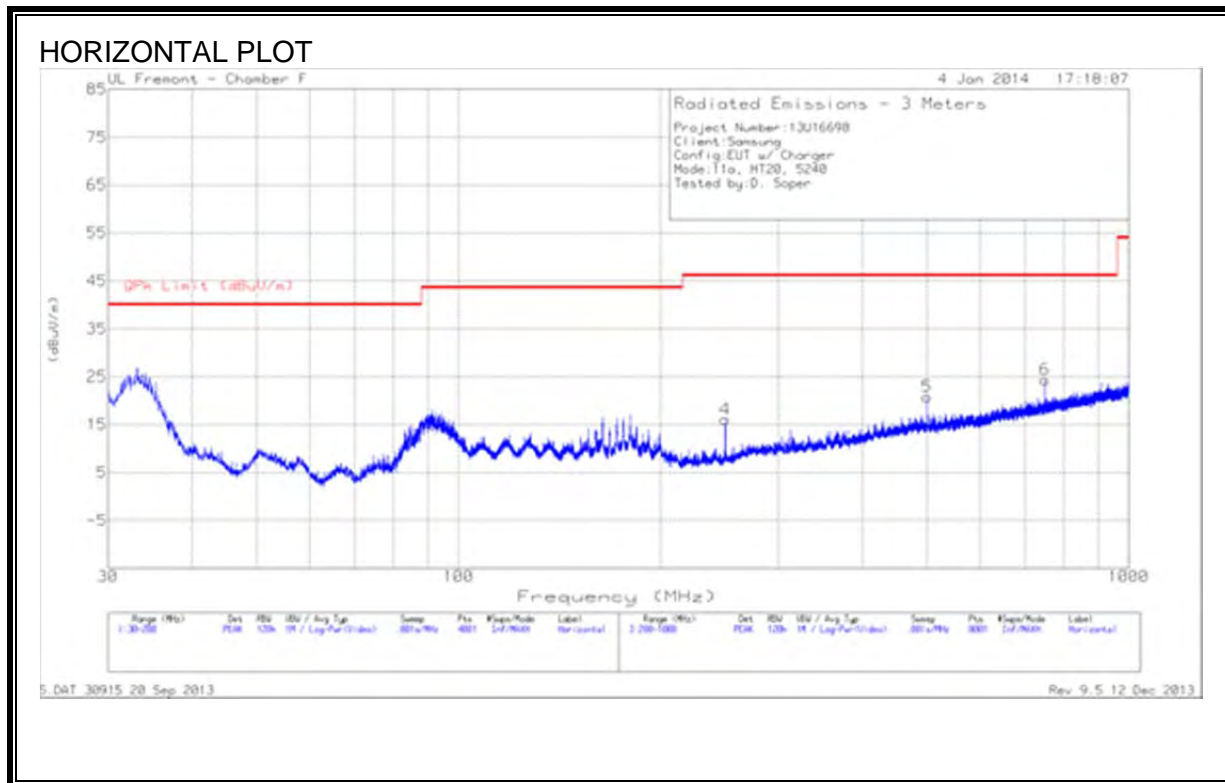

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

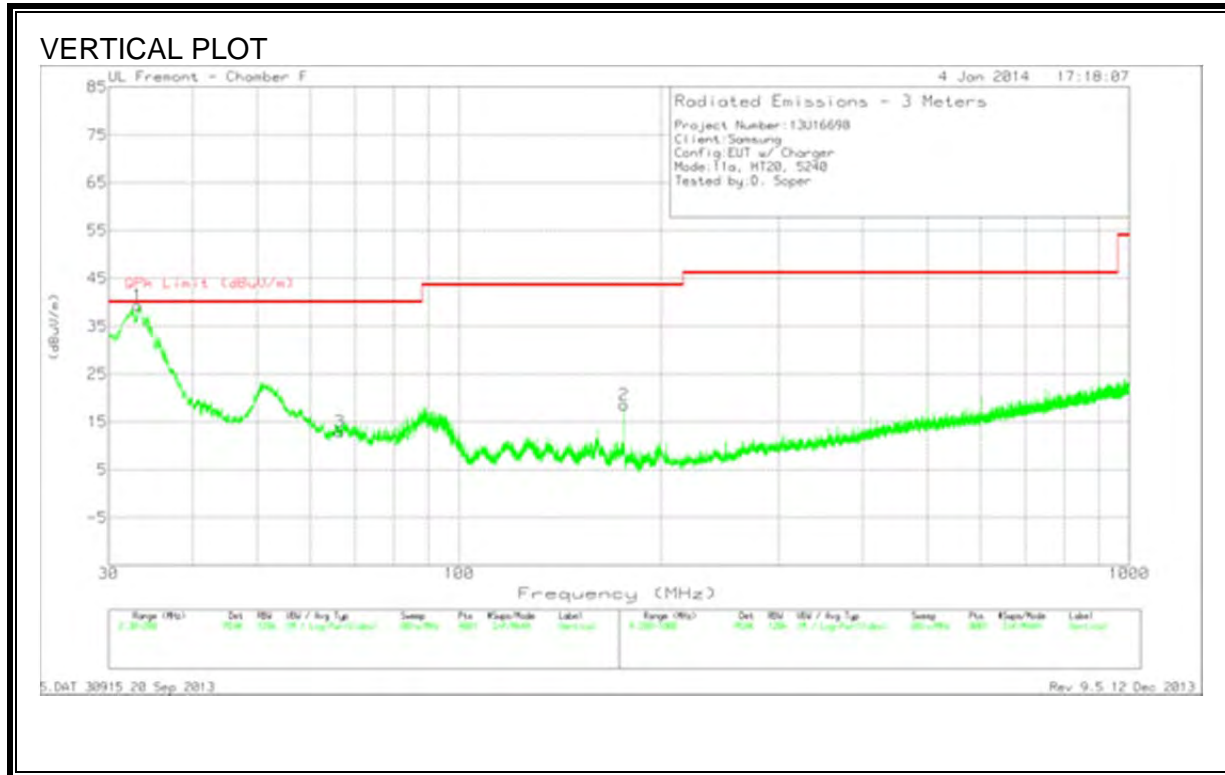

Worst Case Data

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AFT122 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	33.145	52.32	PK	19.1	-32.1	39.32	40	-.68	0-360	100	V
3	66.3375	36.86	PK	7.9	-31.8	12.96	40	-27.04	0-360	100	V
2	176.285	38.38	PK	11.4	-31.2	18.58	43.52	-24.94	0-360	100	V
4	250	35.4	PK	11.6	-30.9	16.1	46.02	-29.92	0-360	100	H
5	500	33.46	PK	17.6	-30.2	20.86	46.02	-25.16	0-360	201	H
6	750	33.51	PK	20.7	-29.8	24.41	46.02	-21.61	0-360	100	H

PK - Peak detector

5.DAT 30915 20 Sep 2013 Rev 9.5 12 Dec 2013

13. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS

Line-L1 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dB(uVolts)	CISPR 11/22 Class B Quasi-peak	Margin to Limit (dB)	CISPR 11/22 Class B Average	Margin to Limit (dB)
1	.15	48.72	PK	.1	0	48.82	66	-17.18	-	-
2	.15	27.28	Av	.1	0	27.38	-	-	56	-28.62
3	.2715	47.97	PK	.1	0	48.07	61.1	-13.03	-	-
4	.2715	30.24	Av	.1	0	30.34	-	-	51.1	-20.76
5	2.076	40.41	PK	.1	.1	40.61	56	-15.39	-	-
6	2.076	16.73	Av	.1	.1	16.93	-	-	46	-29.07
7	4.5015	41.78	PK	.1	.1	41.98	56	-14.02	-	-
8	4.5015	20.24	Av	.1	.1	20.44	-	-	46	-25.56

Line-L2 .15 - 30MHz


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dB(uVolts)	CISPR 11/22 Class B Quasi-peak	Margin to Limit (dB)	CISPR 11/22 Class B Average	Margin to Limit (dB)
9	.15	46.4	PK	.1	0	46.5	66	-19.5	-	-
10	.15	23.74	Av	.1	0	23.84	-	-	56	-32.16
11	.2715	47.84	PK	.1	0	47.94	61.1	-13.16	-	-
12	.2715	28.17	Av	.1	0	28.27	-	-	51.1	-22.83
13	.834	36.62	PK	.1	0	36.72	56	-19.28	-	-
14	.834	17.27	Av	.1	0	17.37	-	-	46	-28.63
15	5.2215	42.3	PK	.1	.1	42.5	60	-17.5	-	-
16	5.2215	18.32	Av	.1	.1	18.52	-	-	50	-31.48


PK - Peak detector

Av - average detection

LINE 1 RESULTS

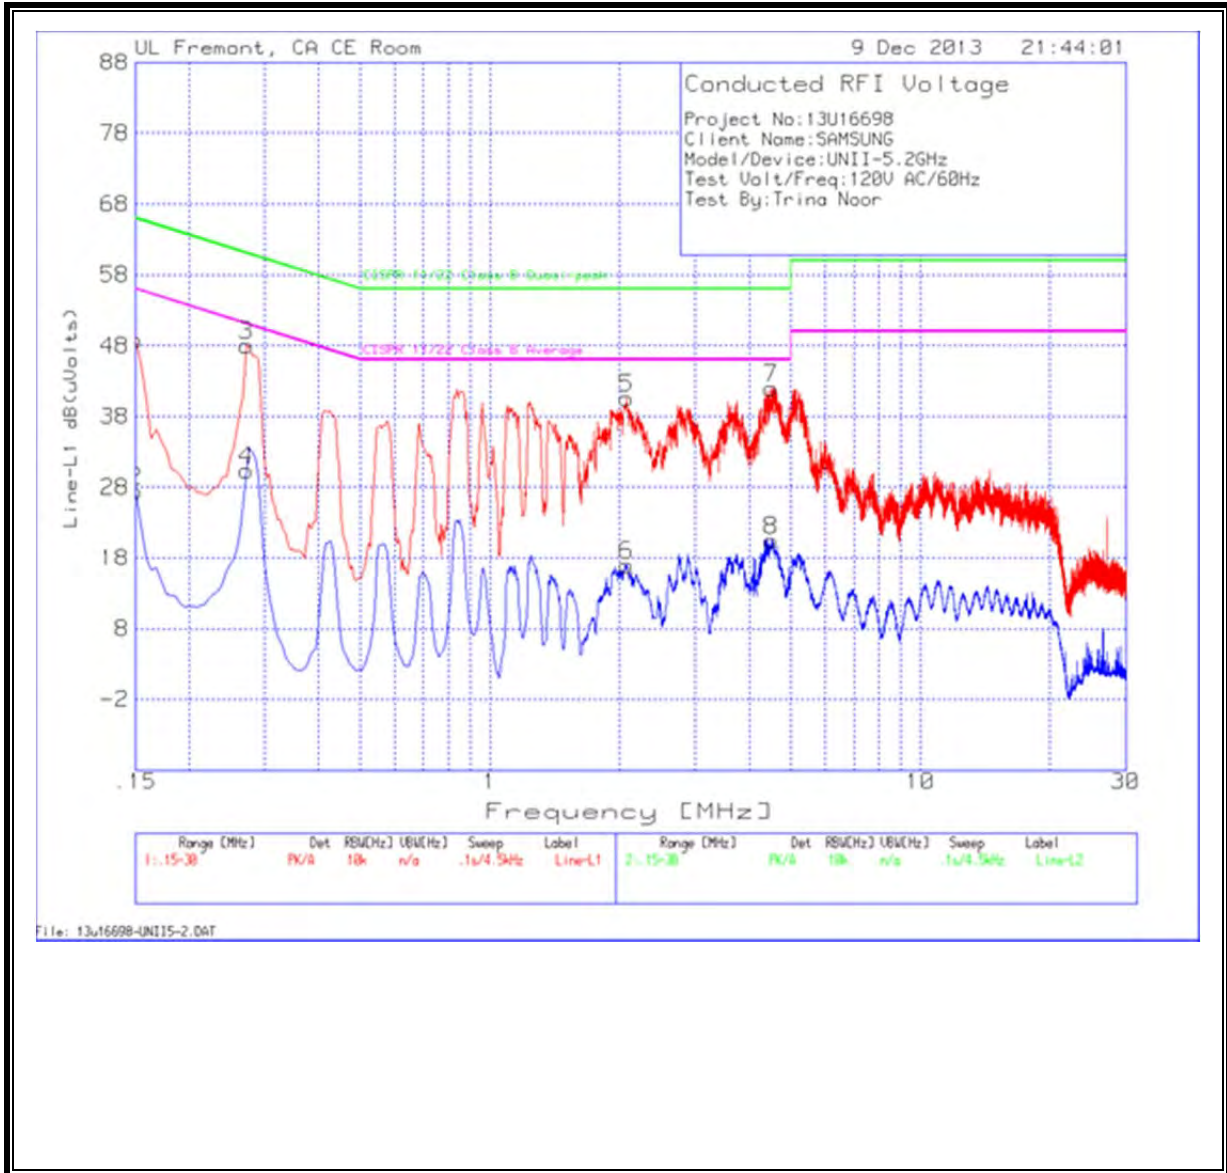

LINE 2 RESULTS

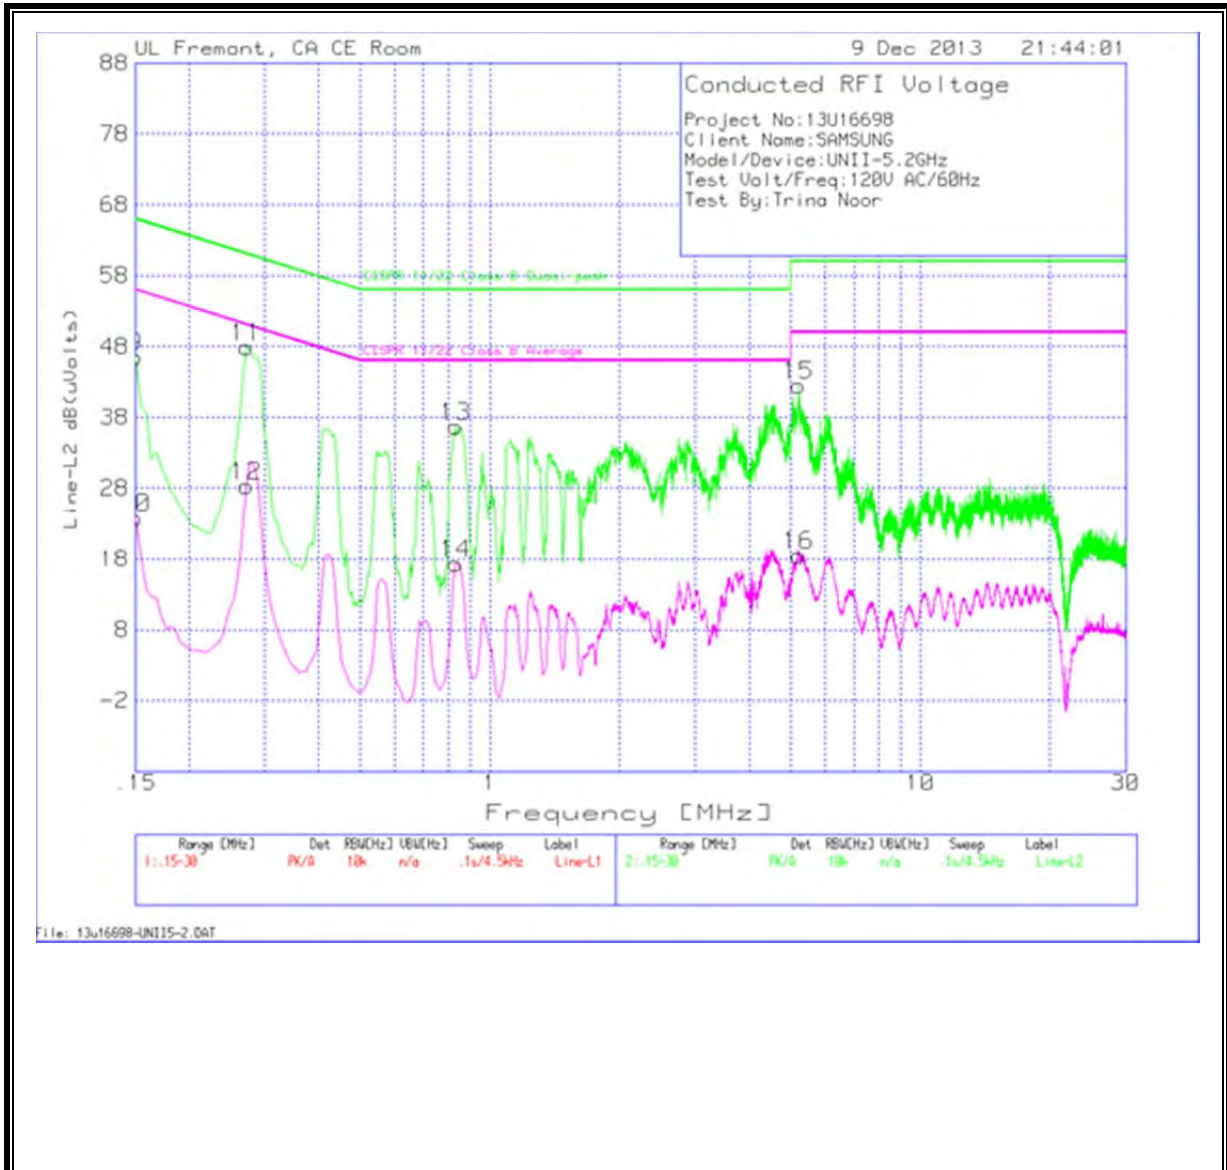

14. DYNAMIC FREQUENCY SELECTION

14.1. OVERVIEW

14.1.1. LIMITS

INDUSTRY CANADA

IC RSS-210 is closely harmonized with FCC Part 15 DFS rules. The deviations are as follows:

RSS-210 Issue 7 A9.4 (b) (ii) **Channel Availability Check Time:** ...

Additional requirements for the band 5600-5650 MHz: Until further notice, devices subject to this Section shall not be capable of transmitting in the band 5600-5650 MHz, so that Environment Canada weather radars operating in this band are protected.

FCC

§15.407 (h) and FCC 06-96 APPENDIX "COMPLIANCE MEASUREMENT PROCEDURES FOR UNLICENSED-NATIONAL INFORMATION INFRASTRUCTURE DEVCIES OPERATING IN THE 5250-5350 MHz AND 5470-5725 MHz BANDS INCORPORATING DYNAMIC FREQUENCY SELECTION".

Table 1: Applicability of DFS requirements prior to use of a channel

Requirement	Operational Mode		
	Master	Client (without radar detection)	Client (with radar detection)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
Uniform Spreading	Yes	Not required	Not required

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Master	Client (without DFS)	Client (with DFS)
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes

Table 3: Interference Threshold values, Master or Client incorporating In-Service Monitoring

Maximum Transmit Power	Value (see note)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm
<p>Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna</p> <p>Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.</p>	

Table 4: DFS Response requirement values

Parameter	Value
<i>Non-occupancy period</i>	30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds
<i>Channel Closing Transmission Time</i>	200 milliseconds + approx. 60 milliseconds over remaining 10 second period
<p>The instant that the <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> begins is as follows: For the Short pulse radar Test Signals this instant is the end of the <i>Burst</i>. For the Frequency Hopping radar Test Signal, this instant is the end of the last radar burst generated. For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission. The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate channel changes (an aggregate of approximately 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.</p>	

Table 5 – Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (Microseconds)	PRI (Microseconds)	Pulses	Minimum Percentage of Successful Detection	Minimum Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

Table 6 – Long Pulse Radar Test Signal


Radar Waveform	Bursts	Pulses per Burst	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Minimum Percentage of Successful Detection	Minimum Trials
5	8-20	1-3	50-100	5-20	1000-2000	80%	30

Table 7 – Frequency Hopping Radar Test Signal

Radar Waveform	Pulse Width (µsec)	PRI (µsec)	Burst Length (ms)	Pulses per Hop	Hopping Rate (kHz)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	300	9	.333	70%	30

14.1.2. TEST AND MEASUREMENT SYSTEM

RADIATED METHOD SYSTEM BLOCK DIAGRAM

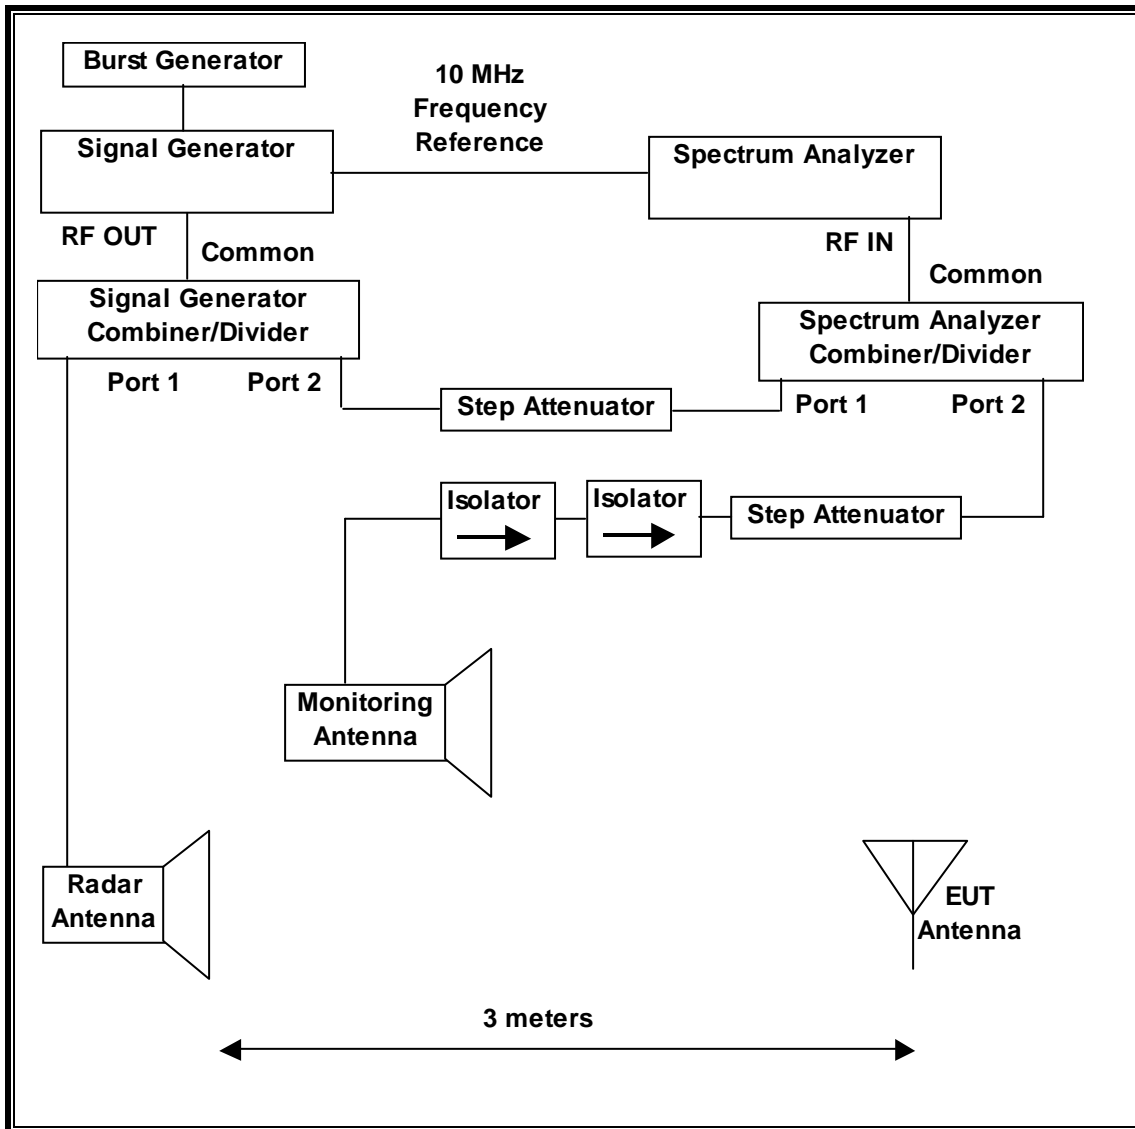

SYSTEM OVERVIEW

The short pulse and long pulse signal generating system utilizes the NTIA software. The Vector Signal Generator has been validated by the NTIA. The hopping signal generating system utilizes the CCS simulated hopping method and system, which has been validated by the DoD, FCC and NTIA. The software selects waveform parameters from within the bounds of the signal type on a random basis using uniform distribution.

The short pulse types 2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time.

The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the August 2005 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC 06-96 APPENDIX. The frequency of the signal generator is incremented in 1 MHz steps from F_L to F_H for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

SYSTEM CALIBRATION

A 50-ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to a horn antenna via a coaxial cable, with the reference level offset set to (horn antenna gain – coaxial cable loss). The signal generator is set to CW mode. The amplitude of the signal generator is adjusted to yield a level of –64 dBm as measured on the spectrum analyzer.

Without changing any of the instrument settings, the spectrum analyzer is reconnected to the Common port of the Spectrum Analyzer Combiner/Divider. The Reference Level Offset of the spectrum analyzer is adjusted so that the displayed amplitude of the signal is –64 dBm.

The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device. The interference detection threshold may be varied from the calibrated value of –64 dBm and the spectrum analyzer will still indicate the level as received by the Master Device.

ADJUSTMENT OF DISPLAYED TRAFFIC LEVEL

A link is established between the Master and Slave and the distance between the units is adjusted as needed to provide a suitable received level at the Master and Slave devices. The video test file is streamed to generate WLAN traffic. The monitoring antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.


TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the DFS tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset Number	Cal Due
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01178	09/10/14
Vector Signal Generator, 20GHz	Agilent / HP	E8267C	C01066	09/12/14

14.1.3. SETUP OF EUT

RADIATED METHOD EUT TEST SETUP

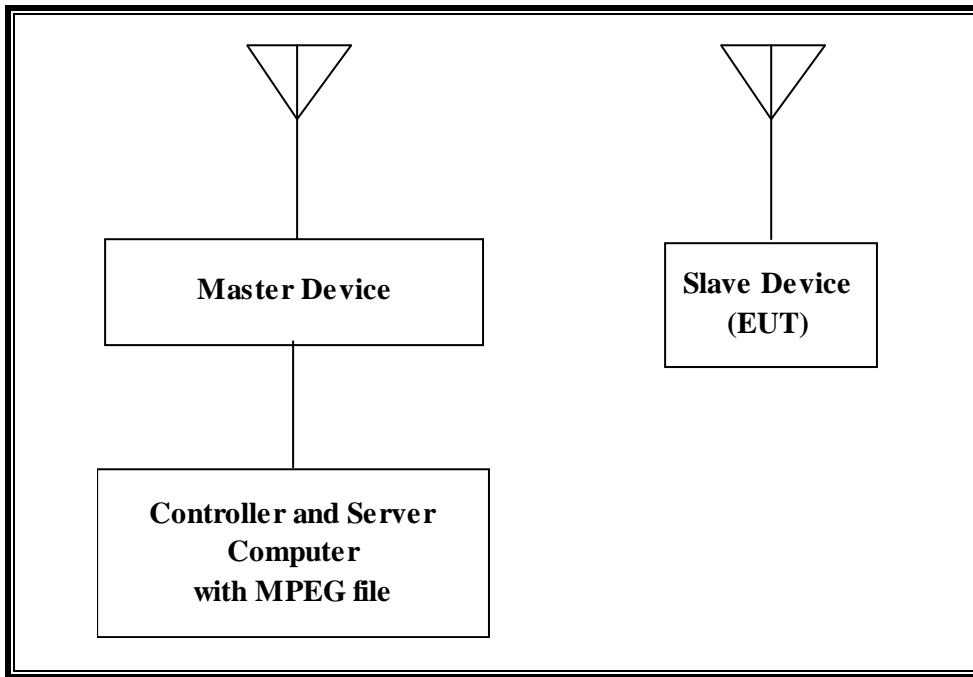

SUPPORT EQUIPMENT

The following support equipment was utilized for the DFS tests documented in this report:

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Wireless Access Point	Cisco	AIR-AP1252AG-A-K9	FTX120690N2	LDK102061
AC Adapter (AP)	Delta Electronics	EADP-45BB B	DTH112490BD	DoC
Notebook PC (Controller/Server)	Dell	PP18L	10657517725	DoC
AC Adapter (Controller/Server PC)	Dell	LA65SN0-00	CN-ODF263-71615-6AU-1019	DoC

14.1.5. DESCRIPTION OF EUT

The EUT operates over the 5250-5350 MHz and 5470-5725 MHz ranges excluding the 5600-5650 MHz range.

The EUT is a Slave Device without radar detection capability.

The highest power level within these bands is 16.23dBm EIRP in the 5250-5350 MHz band and 16.35 dBm EIRP in the 5470-5725 MHz band.

The only antenna assembly utilized with the EUT has a gain of 1.61 dBi in the 5250-5350 MHz band and 2.09 dBi in the 5470-5725 MHz band.

The rated output power of the Master unit is > 23dBm (EIRP). Therefore the required interference threshold level is -64 dBm. After correction for procedural adjustments, the required radiated threshold at the antenna port is $-64 + 1 = -63$ dBm.

The calibrated radiated DFS Detection Threshold level is set to -64 dBm. The tested level is lower than the required level hence it provides margin to the limit.

The EUT uses one transmitter/receiver chain connected to an antenna to perform radiated tests.

WLAN traffic is generated by streaming the video file TestFile.mp2 "6 ½ Magic Hours" from the Master to the Slave in full motion video mode using MXPlayer media player.

TPC is not required since the maximum EIRP is less than 500 mW (27 dBm).

TPC is not required since the maximum EIRP is less than 500 mW (27 dBm), however TPC is implemented.

The EUT utilizes the 802.11ac architecture. Three nominal channel bandwidths are implemented: 20 MHz, 40 MHz and 80 MHz.

The software installed in the access point is version N7505.001.

UNIFORM CHANNEL SPREADING

This requirement is not applicable to Slave radio devices.

OVERVIEW OF MASTER DEVICE WITH RESPECT TO §15.407 (h) REQUIREMENTS

The Master Device is a Cisco Access Point, FCC ID: LDK102061. The minimum antenna gain for the Master Device is 3.5 dBi.

The rated output power of the Master unit is > 23dBm (EIRP). Therefore the required interference threshold level is -64 dBm. After correction for procedural adjustments, the required radiated threshold at the antenna port is $-64 + 1 = -63$ dBm.

The calibrated radiated DFS Detection Threshold level is set to -64 dBm. The tested level is lower than the required level hence it provides margin to the limit.


14.2. RESULTS FOR 20 MHz BANDWIDTH

14.2.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5500 MHz.

14.2.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM

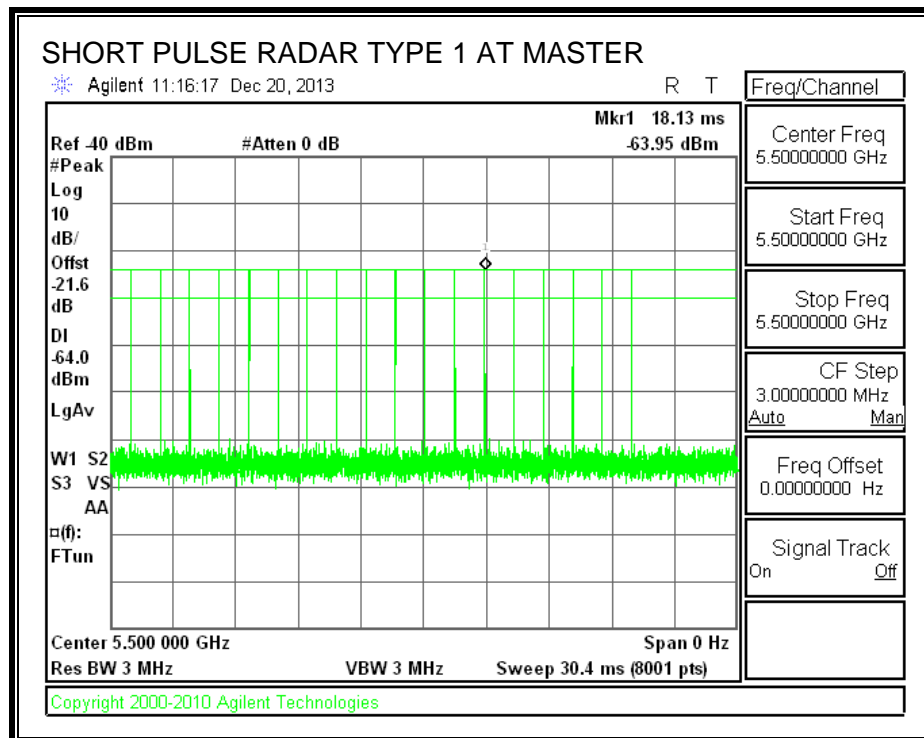

TRAFFIC

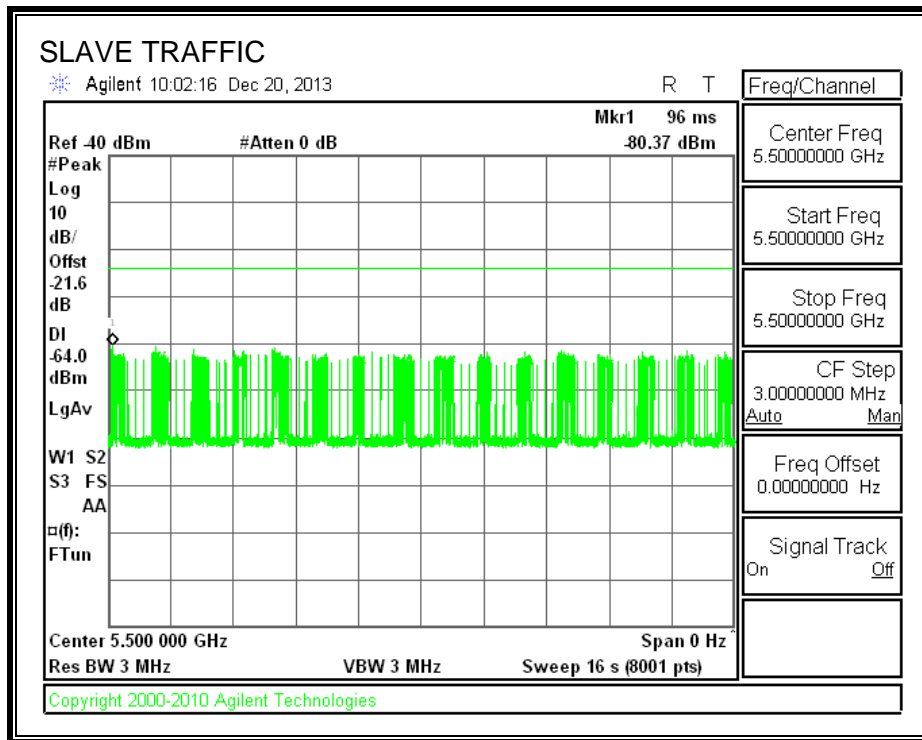

14.2.3. OVERLAPPING CHANNEL TESTS

RESULTS

These tests are not applicable.

14.2.4. MOVE AND CLOSING TIME

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

RESULTS


Channel Move Time (sec)	Limit (sec)
0.126	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
0.0	60

MOVE TIME

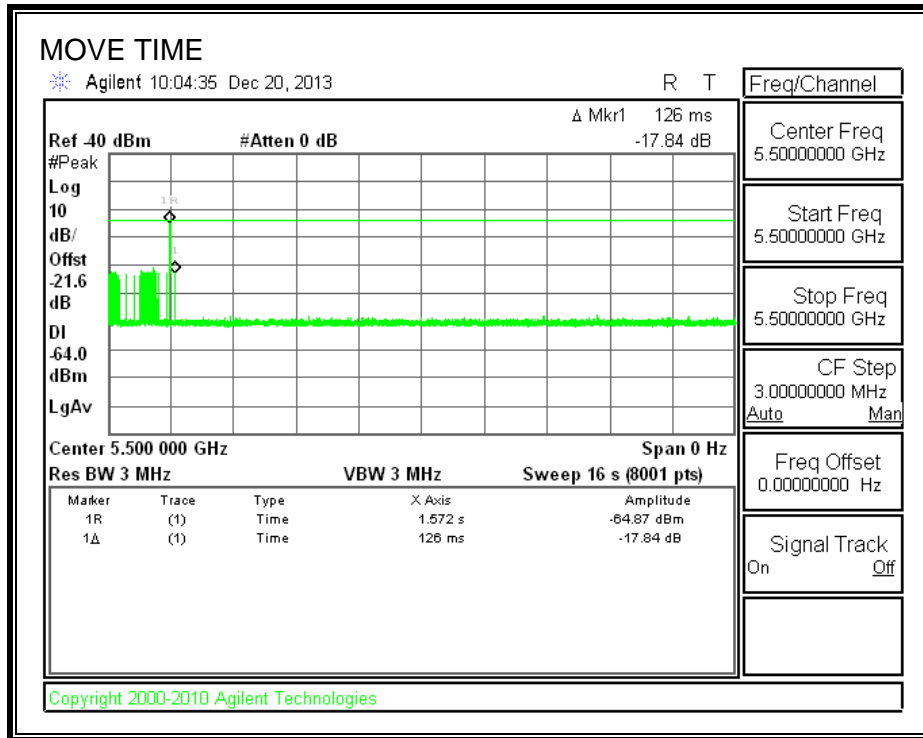


CHANNEL CLOSING TIME

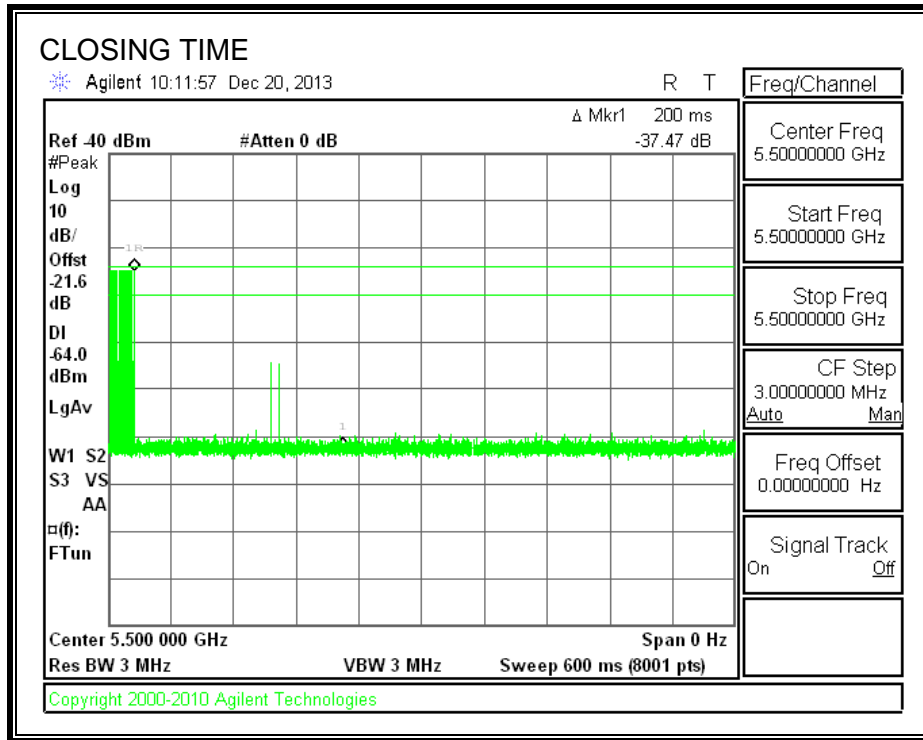

AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the aggregate monitoring period.

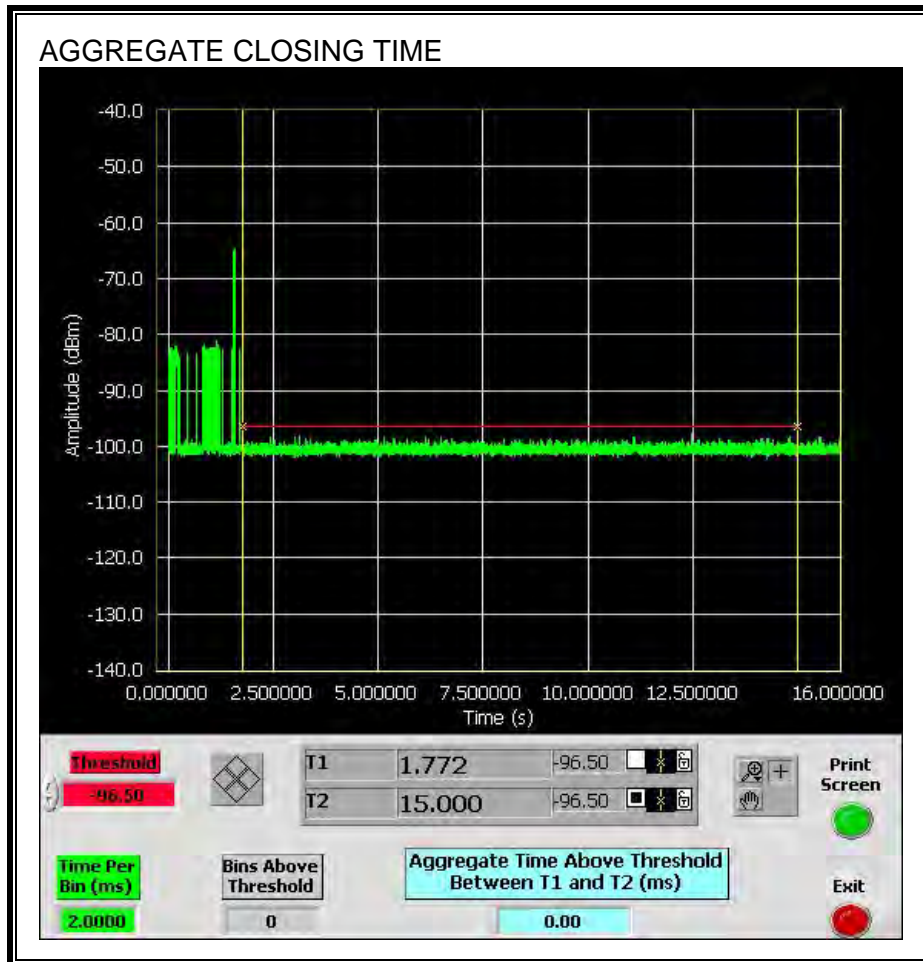


14.3. RESULTS FOR 40 MHz BANDWIDTH

14.3.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5510 MHz.

14.3.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM

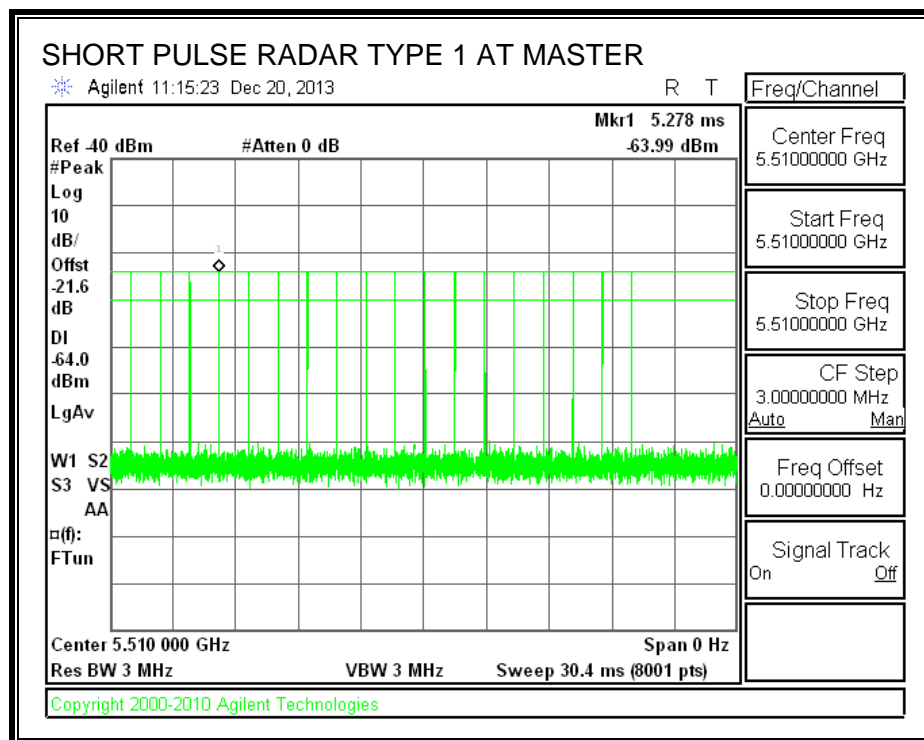

TRAFFIC

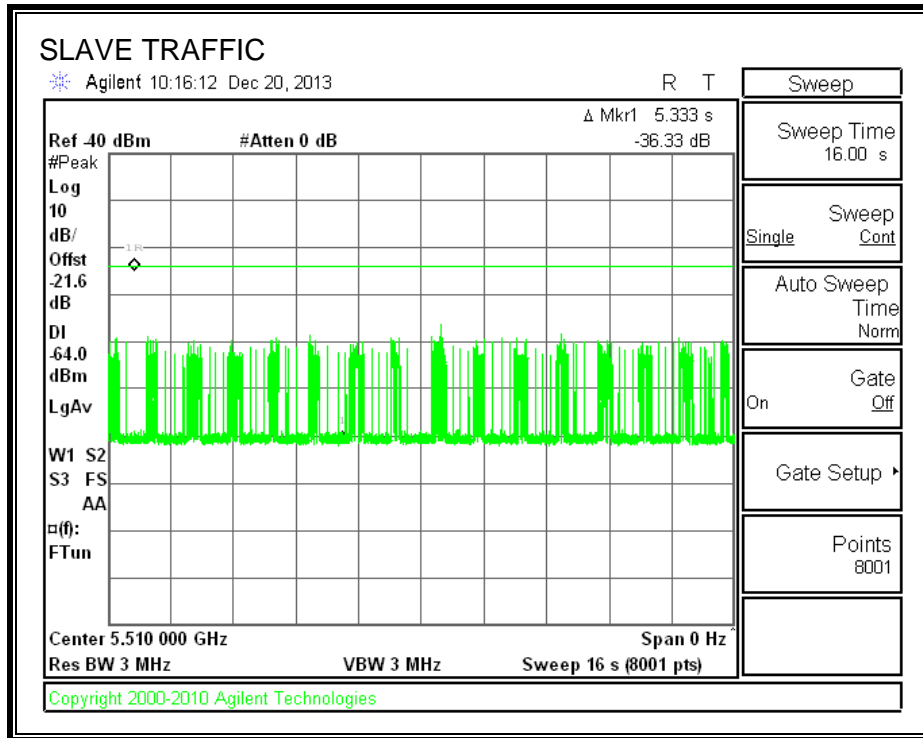

14.3.3. OVERLAPPING CHANNEL TESTS

RESULTS

These tests are not applicable.

14.3.4. MOVE AND CLOSING TIME

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

RESULTS


Channel Move Time (sec)	Limit (sec)
0.060	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
0.0	60

MOVE TIME

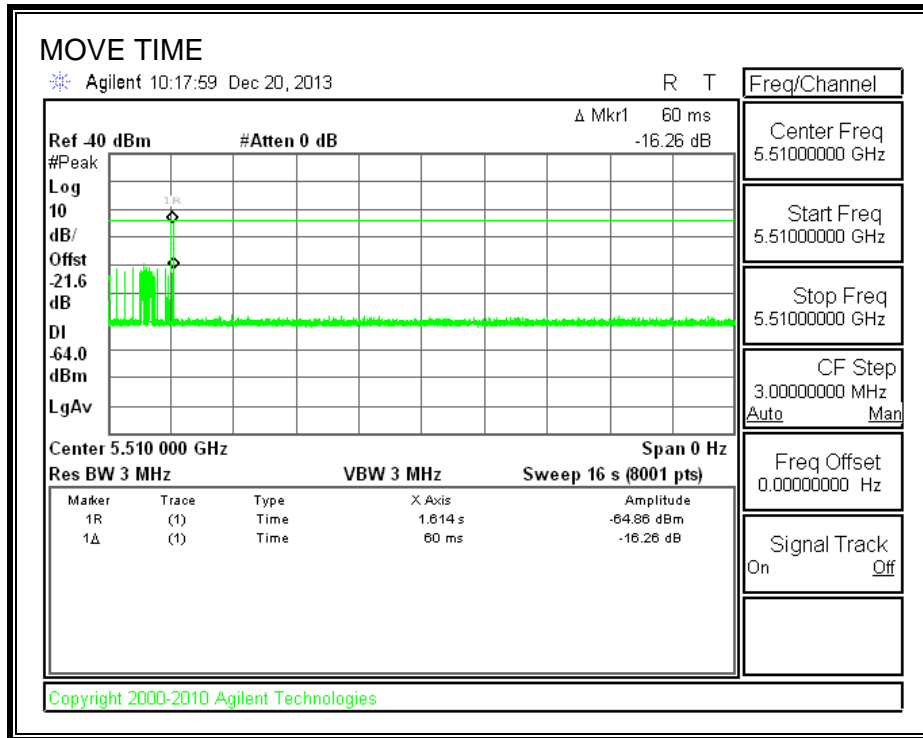


CHANNEL CLOSING TIME

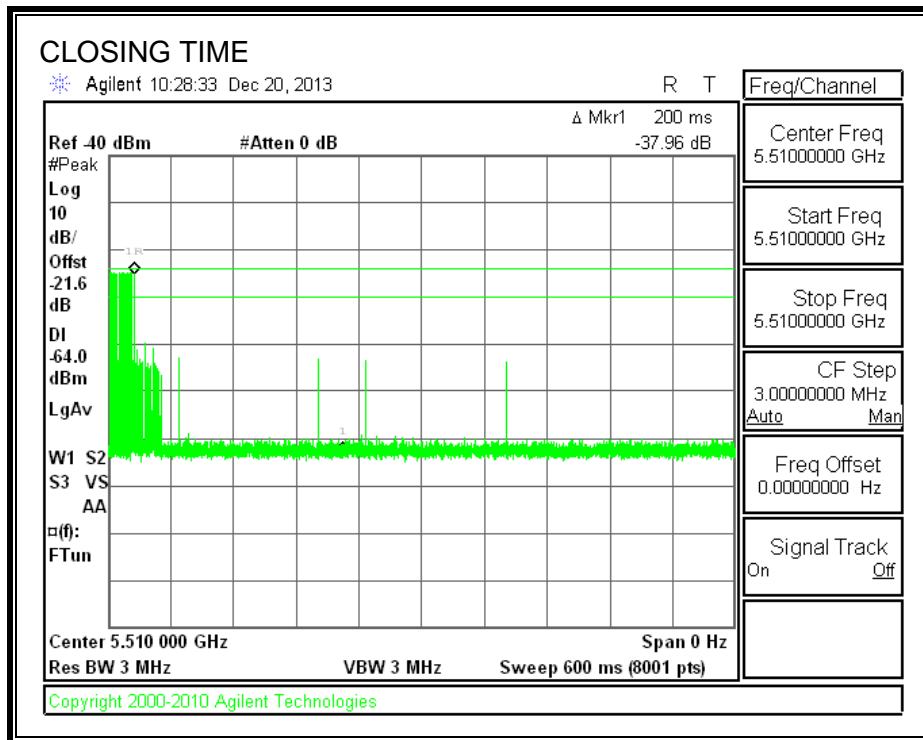

AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

Only intermittent transmissions are observed during the aggregate monitoring period.

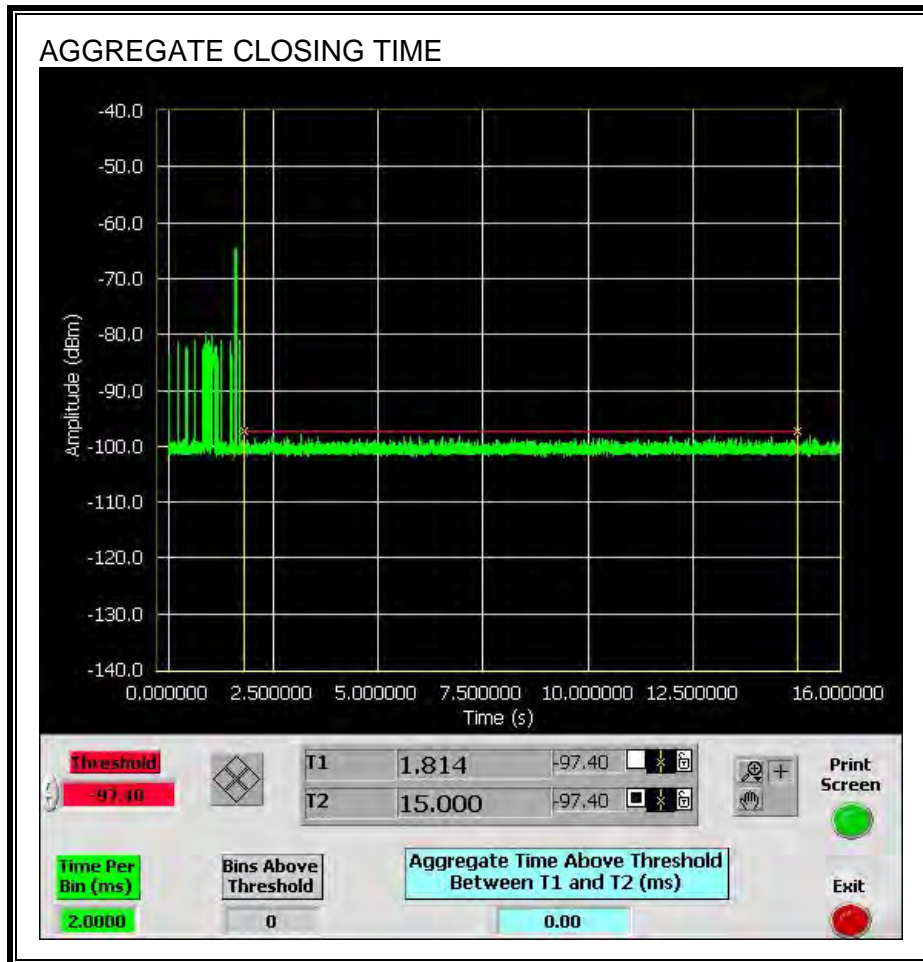

14.3.5. NON-OCCUPANCY PERIOD

RESULTS

No EUT transmissions were observed on the test channel during the 30-minute observation time.

