



**FCC 47 CFR Parts 1 & 2
Published RF Exposure KDB Procedures
IEEE Std 1528-2013**

SAR EVALUATION REPORT

For
GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac, NFC & ANT

**Model: SM-N7505
FCC ID: A3LSMN7505**

**Report Number: 13U16698-7A
Issue Date: 1/13/2014**

Prepared for
**Samsung Electronics Co., Ltd.
416, Maetan 3-Dong, Yeongtong-Gu
Suwon-City, Gyeonggi-Do 443-742, South Korea**

Prepared by
**UL Verification Services Inc.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	1/9/2014	Initial Issue	--
A	1/13/2014	1. Section 7.2.: Corrected EUT does not support DTS 2. Section 9.2.: added HSPA+.	Devin Chang

Table of Contents

1. Attestation of Test Results..... 5

2. Test Methodology 6

3. Facilities and Accreditation 6

4. Calibration and Uncertainty 7

 4.1. *Measuring Instrument Calibration 7*

 4.2. *Measurement Uncertainty..... 7*

5. Measurement System Description and Setup..... 8

6. SAR Measurement Procedure..... 9

 6.1. *Normal SAR Measurement Procedure..... 9*

 6.2. *Volume Scan Procedures 11*

7. Device Under Test..... 12

 7.1. *General Information 12*

 7.2. *Wireless Technologies..... 13*

 7.3. *RF Output Power Tolerance 14*

 7.4. *Simultaneous Transmission Condition 15*

 7.5. *General LTE SAR Test and Reporting Considerations..... 15*

8. RF Exposure Conditions 16

 8.1. *Head Exposure Conditions 16*

 8.2. *Body-worn Accessory Exposure Conditions..... 16*

 8.3. *Hotspot Exposure Conditions..... 16*

9. RF Output Power Measurement..... 17

 9.1. *GSM 17*

 9.2. *W-CDMA 18*

 9.3. *LTE Band..... 22*

 9.4. *Wi-Fi (2.4 GHz Band)..... 25*

 9.5. *Wi-Fi (5 GHz Bands)..... 26*

 9.6. *Bluetooth 29*

10. Tissue Dielectric Properties 30

 10.1. *Composition of Ingredients for the Tissue Material Used in the SAR Tests 31*

 10.1. *Tissue Dielectric Parameter Check Results..... 32*

11. System Performance Check 35

 11.1. *System Performance Check Measurement Conditions..... 35*

11.2. Reference SAR Values for System Performance Check..... 35

11.3. System Performance Check Results 36

12. SAR Test Results 38

12.1. GSM850..... 38

12.2. GSM1900..... 39

12.3. W-CDMA Band V 40

12.4. W-CDMA Band II..... 40

12.5. LTE Band 5 (BW=10 MHz)..... 41

12.6. Wi-Fi (DTS Band)..... 42

12.7. Wi-Fi (UNII Band)..... 43

12.8. Bluetooth..... 44

12.8.1. Standalone SAR Test Exclusion Considerations 44

12.8.2. Estimated SAR..... 44

13. SAR Measurement Variability..... 45

13.1. The Highest Measured SAR Configuration in Each Frequency Band 45

13.2. Repeated Measurement Results 45

14. Simultaneous Transmission SAR Analysis..... 46

14.1. Sum of the SAR for GSM850 & Wi-Fi & BT 47

14.2. Sum of the SAR for GSM1900 & Wi-Fi & BT 47

14.3. Sum of the SAR for WCDMA Band V & Wi-Fi & BT 48

14.4. Sum of the SAR for WCDMA Band II & Wi-Fi & BT 48

14.5. Sum of the SAR for LTE Band 5 & Wi-Fi & BT 49

15. Appendixes..... 50

15.1. Photos and Antenna Locations..... 50

15.2. System Performance Check Plots 50

15.3. Highest SAR Test Plots..... 50

15.4. Calibration Certificate for E-Field Probe EX3DV4 - SN 3929 50

15.5. Calibration Certificate for E-Field Probe EX3DV4 - SN 3773 50

15.6. Calibration Certificate for E-Field Probe EX3DV4 - SN 3902 50

15.7. Calibration Certificate for E-Field Probe EX3DV4 - SN 3936 50

15.8. Calibration Certificate for D835V2 - SN 4d117 50

15.9. Calibration Certificate for D1900V2 - SN 5d140 50

15.10. Calibration Certificate for D2450V2 - SN 706 50

15.11. Calibration Certificate for D5GHzV2 - SN 1003 50

1. Attestation of Test Results

Applicant	Samsung Electronics Co., Ltd.			
DUT description	GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac, NFC & ANT			
Model	SM-N7505			
Test device is	An identical prototype			
Device category	Portable			
Exposure category	General Population/Uncontrolled Exposure			
Date tested	12/18/2013 – 1/2/2014			
The highest reported SAR values	RF exposure condition	Licensed	DTS	UNII
	Head	0.482 W/kg	0.336 W/kg	0.071 W/kg
	Body-worn Accessory	0.963 W/kg	0.236 W/kg	0.234 W/kg
	Wireless Router (Hotspot)	0.963 W/kg	0.236 W/kg	N/A
	Simultaneous Transmission	1.080 W/kg	1.029 W/kg	1.080 W/kg
Applicable Standards	FCC 47 CFR Parts 1 & 2 Published RF Exposure KDB Procedures, and TCB workshop updates IEEE Std 1528-2013			
Test Results	Pass			

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.

Approved & Released By:

Prepared By:




Devin Chang
 WiSE Enginner
 UL Verification Services Inc.

Mark Balauro
 WiSE Laboratory Technician
 UL Verification Services Inc.

2. Test Methodology

The tests documented in this report were performed in accordance with FCC 47 CFR Parts 1 & 2, IEEE STD 1528-2013, the following FCC Published RF exposure KDB procedures, and TCB workshop updates:

- 447498 D01 General RF Exposure Guidance v05r01
- 648474 D04 Handset SAR v01r01
- 941225 D01 SAR test for 3G devices v02
- 941225 D02 HSPA and 1x Advanced v02r02
- 941225 D04 SAR for GSM E GPRS Dual Xfer Mode v01
- 941225 D05 SAR for LTE Devices v02r02
- 941225 D06 Hot Spot SAR v01r01
- 248227 D01 SAR Meas for 802 11abg v01r02
- 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r01
- 865664 D02 SAR Reporting v01r01
- 690783 D01 SAR Listings on Grants v01r03

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	
SAR Lab F	

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. Calibration and Uncertainty

4.1. Measuring Instrument Calibration

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Tissue Dielectric Properties

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	8753ES	MY40000980	2/20/2014
Dielectronic Probe kit	SPEAG	DAK-3.5	1103	2/5/2014
Thermometer	Control Company	4242	122529163	9/19/2014

System Performance Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Synthesized Signal Generator	Agilent	8665B	3438A00633	6/13/2014
Power Meter	Agilent	N1912A	MY53040016	4/4/2014
Power Sensor	Agilent	E93223A	MY53070008	4/3/2014
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1808939	N/A
Directional coupler	Werlatone	C8060-102	2710	N/A
DC Power Supply	AMETEK	XT15-4	1319A02778	N/A
Synthesized Signal Generator	HP	8665B	3744A01155	3/6/2014
Power Meter	Agilent	N1911A	MY53060002	4/4/2014
Power Meter	Agilent	N1911A	MY53060016	8/3/2014
Power Sensor	Agilent	E9323A	MY53070003	4/3/2014
Power Sensor	Agilent	E9323A	MY53070007	9/30/2014
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1622052	N/A
Directional coupler	Werlatone	C8060-102	2149	N/A
DC Power Supply	KENWOOD	PA36-3A	7060074	N/A
Thermometer	TRACEABLE	4242	122529163	9/19/2014
E-Field Probe	SPEAG	EX3DV4	3929	6/24/2014
E-Field Probe	SPEAG	EX3DV4	3773	4/26/2014
E-Field Probe	SPEAG	EX3DV4	3902	7/12/2014
E-Field Probe	SPEAG	EX3DV4	3936	7/22/2014
Data Acquisition Electronics	SPEAG	DAE4	1259	2/7/2014
Data Acquisition Electronics	SPEAG	DAE4	1359	2/8/2014
Data Acquisition Electronics	SPEAG	DAE4	1377	7/15/2014
Data Acquisition Electronics	SPEAG	DAE4	1380	7/15/2014
System Validation Dipole	SPEAG	D835V2	4d117	5/28/2014
System Validation Dipole	SPEAG	D1900V2	5d140	4/18/2014
System Validation Dipole	SPEAG	D2450V2	706	5/29/2014
System Validation Dipole	SPEAG	D5GHzV2	1003	9/19/2014

Others


Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Base Station Simulator	R & S	CMU200	106301	7/3/2014
Base Station Simulator	R & S	CMW500	124594-HX	7/2/2014
Base Station Simulator	R & S	CMW500	132909-bp	2/19/2014
Power Meter	Agilent	N1912A	MY53040016	4/4/2014
Power Sensor	Agilent	N1921A	MY52020011	5/13/2014

4.2. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r01 Section 2.8.1., when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

5. Measurement System Description and Setup

The DASY5 system used for performing compliance tests consists of the following items:

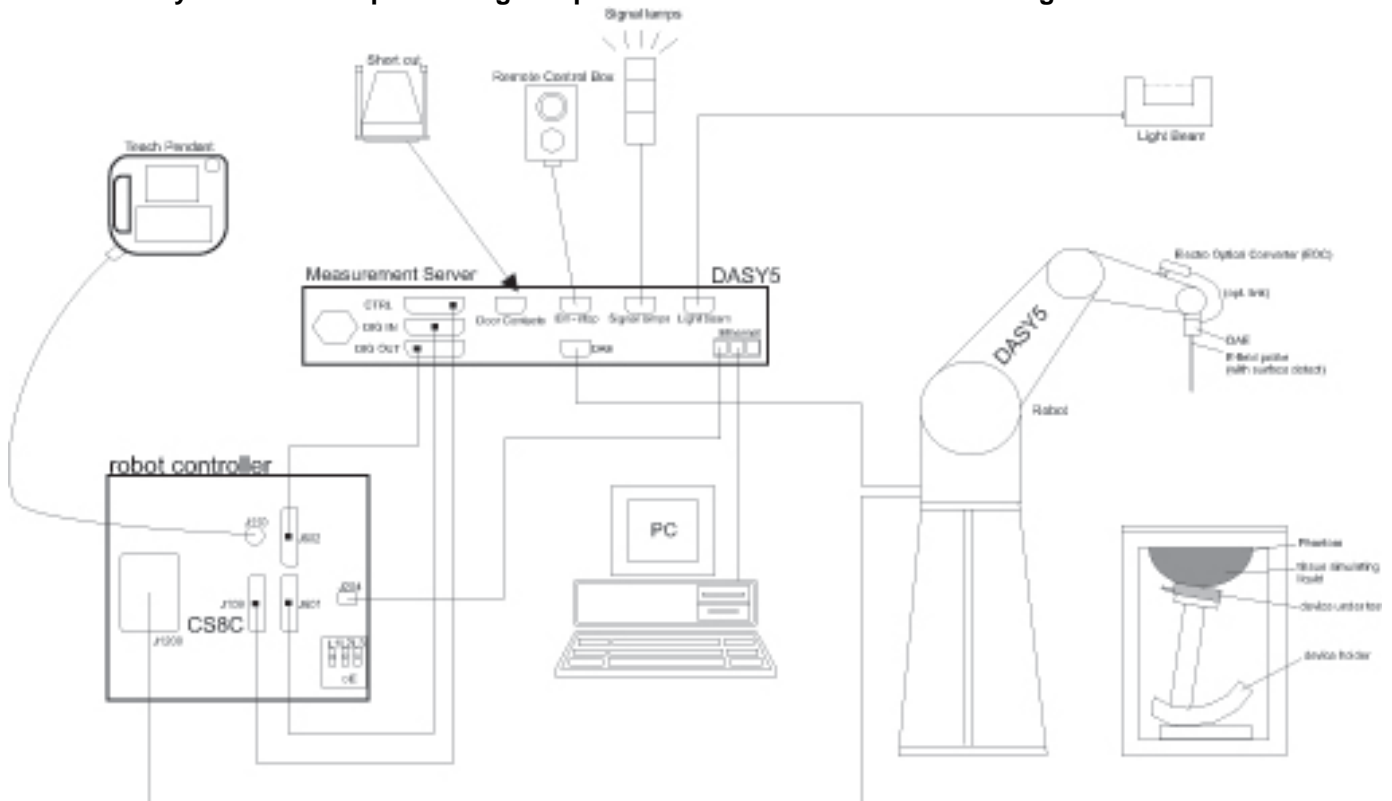

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6. SAR Measurement Procedure

6.1. Normal SAR Measurement Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r01

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r01

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm *	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the area scan based <i>1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

6.2. Volume Scan Procedures

Step 1: Repeat Step 1-4 in Section 6.1

Step 2: Volume Scan

Volume Scans are used to assess peak SAR and averaged SAR measurements in largely extended 3-dimensional volumes within any phantom. This measurement does not need any previous area scan. The grid can be anchored to a user specific point or to the current probe location.

Step 3: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

7. Device Under Test

7.1. General Information

Operating Configuration(s)	Held to head, Body-worn (Voice call)
Mobile Hotspot	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi -enabled devices. <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 2.4 GHz) (Mobile AP, FCC: Ch.1 ~ Ch.11) <input type="checkbox"/> Mobile Hotspot (Wi-Fi 5 GHz) (Mobile AP, FCC: Ch.149~165)
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 2.4 GHz) (FCC: Ch.1 ~ Ch.11) <input type="checkbox"/> Wi-Fi Direct (Wi-Fi 5 GHz) (FCC: Ch.149 ~ Ch.165)
Device dimension	Overall (Length x Width): 147.5 mm x 76.5mm Overall Diagonal: 159mm Display Diagonal: 140.5mm
Back Cover	<input type="checkbox"/> Normal Battery Cover <input type="checkbox"/> Wireless Charger Battery Cover <input checked="" type="checkbox"/> Normal Battery Cover with NFC
Accessory	<input checked="" type="checkbox"/> Headset
Battery Options	<input checked="" type="checkbox"/> Standard – Lithium-ion battery, Rating 3.8 Vdc, 11.78 Wh <input type="checkbox"/> Extended (large capacity)

7.2. Wireless Technologies

Wireless Technology and Frequency Bands	GSM: 850 / 1900 W-CDMA Band: II / V LTE Band 5 Wi-Fi : 2.4 / 5 GHz Bluetooth: 2.4 GHz.
Mode	GSM - <input checked="" type="checkbox"/> Voice (GMSK) - <input checked="" type="checkbox"/> GPRS (GMSK) - <input checked="" type="checkbox"/> EGPRS (8PSK) W-CDMA - <input checked="" type="checkbox"/> UMTS Rel. 99 (Voice & Data) - <input checked="" type="checkbox"/> HSDPA (Rel. 5) - <input checked="" type="checkbox"/> HSUPA (Rel. 6) - <input type="checkbox"/> DC-HSDPA - <input checked="" type="checkbox"/> HSPA+ LTE - <input checked="" type="checkbox"/> QPSK - <input checked="" type="checkbox"/> 16QAM Wi-Fi 2.4GHz (802.11b/g/n) - <input checked="" type="checkbox"/> 802.11b - <input checked="" type="checkbox"/> 802.11g - <input checked="" type="checkbox"/> 802.11n (20MHz) - <input type="checkbox"/> 802.11n (40MHz) Wi-Fi 5GHz - <input checked="" type="checkbox"/> 802.11a - <input checked="" type="checkbox"/> 802.11n (20MHz) - <input checked="" type="checkbox"/> 802.11n (40MHz) - <input checked="" type="checkbox"/> 802.11ac (20MHz) - <input checked="" type="checkbox"/> 802.11ac (40MHz) - <input checked="" type="checkbox"/> 802.11ac (80MHz) Bluetooth Ver. 4.0 (LE)
Duty Cycle (used for SAR testing)	GSM Voice: 12.5%; GPRS 1 Slot: 12.5%; 2 Slots: 25%, 3 Slots: 37.5%, 4 Slots: 50%, W-CDMA: 100% LTE: 100% Wi-Fi 802.11a/b/g/n: 100%
GPRS Multi-Slot Class	<input type="checkbox"/> Class 8 - One Up <input type="checkbox"/> Class 10 - Two Up <input type="checkbox"/> Class 12 - Four Up <input checked="" type="checkbox"/> Class 33 - Four Up
DTM (Dual Transfer Mode)	<input type="checkbox"/> Supported
VoIP (GPRS)	<input checked="" type="checkbox"/> Supported
SV-LTE & SV-DO	<input type="checkbox"/> Supported

7.3. RF Output Power Tolerance

Upper limit (dB): 0.5 ~ -1.5		RF Output Power (dBm)							
RF Air interface	Mode	Target				Max. tune-up tolerance limit			
		1 Slot	2 Slot	3 Slot	4 Slot	1 Slot	2 Slot	3 Slot	4 Slot
GSM850	Voice	32.5				33.0			
	GPRS	32.5	31.0	30.0	28.5	33.0	31.5	30.5	29.0
	EGPRS	27.0	26.0	25.0	23.5	27.5	26.5	25.5	24.0
GSM1900	Voice	29.5				30.0			
	GPRS	29.5	28.0	27.0	25.5	30.0	28.5	27.5	26.0
	EGPRS	26.0	25.0	24.0	22.5	26.5	25.5	24.5	23.0
Upper limit (dB): 0.5 ~ -1.5		RF Output Power (dBm)							
RF Air interface	Mode	Target				Max. tune-up tolerance limit			
W-CDMA Band V	R99	22.0				22.5			
	HSDPA	22.0				22.5			
	HSUPA	22.0				22.5			
W-CDMA Band II	R99	22.0				22.5			
	HSDPA	22.0				22.5			
	HSUPA	22.0				22.5			
Upper limit (dB): 0.5 ~ -1.5		RF Output Power (dBm)							
RF Air interface	Mode	Target				Max. tune-up tolerance limit			
LTE Band 5	QPSK	22.5				23.0			
Upper limit (dB): 0.5 ~ -1.5		RF Output Power (dBm)							
RF Air interface	Mode	Target				Max. tune-up tolerance limit			
WiFi 2.4 GHz	802.11b	17.0				17.5			
	802.11g	14.0				14.5			
	802.11n HT20	13.0				13.5			
Upper limit (dB): 0.5 ~ -1.5		RF Output Power (dBm)							
RF Air interface	Mode	Target				Max. tune-up tolerance limit			
WiFi 5 GHz	802.11a	13.0				13.5			
	802.11n HT20	13.0				13.5			
	802.11n HT40	12.0				12.5			
	802.11ac HT20	11.0				11.5			
	802.11ac HT40	11.0				11.5			
	802.11ac HT80	11.0				11.5			
Upper limit (dB): 0.5 ~ -1.5		RF Output Power (dBm)							
RF Air interface	Mode	Target				Max. tune-up tolerance limit			
Bluetooth		10.0				10.5			
Bluetooth (LE)		5.0				5.5			

7.4. Simultaneous Transmission Condition

RF Exposure Condition	Capable Transmit Configurations
Head	1. GSM 850/1900 Voice + Wi-Fi 2.4/5GHz 2. GSM 850/1900 (GPRS/EDGE) + Wi-Fi 2.4/5GHz (VoIP) 3. WCDMA Band 2/5 + Wi-Fi 2.4/5GHz 4. LTE B5 + Wi-Fi 2.4/5GHz
Body-worn Accessory	1. GSM 850/1900 Voice + Wi-Fi 2.4/5GHz 2. GSM 850/1900 Voice + BT 3. GSM 850/1900 (GPRS/EDGE) + Wi-Fi 2.4/5GHz (VoIP) 4. GSM 850/1900 (GPRS/EDGE) + BT (VoIP) 5. WCDMA Band 2/5 + Wi-Fi 2.4/5GHz 6. WCDMA Band 2/5 + BT 7. LTE B5 + Wi-Fi 2.4/5GHz 8. LTE B5 + BT
Wireless Router (Hotspot) and Wi-Fi Direct	1. GSM 850/1900 (GPRS/EDGE) + Wi-Fi 2.4GHz 2. WCDMA Band 2/5 + Wi-Fi 2.4GHz 3. LTE B5 + Wi-Fi 2.4GHz
Notes: 1. Wi-Fi 2.4GHz support Hotspot and Wi-Fi Direct. 2. GPRS, WCDMA and LTE support Hotspot. 3. VoIP is supported in LTE, WCDMA and GPRS. 4. 2.4 GHz WLAN, 2.4 GHz Bluetooth, and 5 GHz WLAN share the same antenna path and cannot transmit simultaneously.	

7.5. General LTE SAR Test and Reporting Considerations

Item	Description																																								
Frequency range, Channel Bandwidth, Numbers and Frequencies	<table border="1"> <thead> <tr> <th rowspan="3">Band 17</th> <th colspan="6">Frequency range: 704 - 716 MHz</th> </tr> <tr> <th colspan="6">Channel Bandwidth</th> </tr> <tr> <th>20 MHz</th> <th>15 MHz</th> <th>10 MHz</th> <th>5 MHz</th> <th>3 MHz</th> <th>1.4 MHz</th> </tr> </thead> <tbody> <tr> <td>Low</td> <td></td> <td></td> <td></td> <td>23755/ 706.5</td> <td></td> <td></td> </tr> <tr> <td>Mid</td> <td></td> <td></td> <td>23790/ 710</td> <td>23790/ 710</td> <td></td> <td></td> </tr> <tr> <td>High</td> <td></td> <td></td> <td></td> <td>23825/ 713.5</td> <td></td> <td></td> </tr> </tbody> </table>	Band 17	Frequency range: 704 - 716 MHz						Channel Bandwidth						20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	Low				23755/ 706.5			Mid			23790/ 710	23790/ 710			High				23825/ 713.5		
Band 17	Frequency range: 704 - 716 MHz																																								
	Channel Bandwidth																																								
	20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																			
Low				23755/ 706.5																																					
Mid			23790/ 710	23790/ 710																																					
High				23825/ 713.5																																					
LTE transmitter and antenna implementation	LTE has one TX/RX antennas and one Rx only antennas. Refer to Appendix "Antenna Locations and Separation Distances" for antenna locations																																								
Maximum power reduction (MPR)	<p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> </tbody> </table> <p>MPR Built-in by design A-MPR (additional MPR) was disabled during SAR testing</p>	Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2		
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																		
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																			
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																		
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																		
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																		
Power reduction	No																																								
Spectrum plots for RB configurations	A properly configured basestation simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																								

8. RF Exposure Conditions

Refer to Appendix “Antenna Locations and Separation Distances” for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

8.1. Head Exposure Conditions

For WWAN, LTE and Wi-Fi

Test Configurations	SAR Required	Note
Left Touch	Yes	
Left Tilt (15°)	Yes	
Right Touch	Yes	
Right Tilt (15°)	Yes	

8.2. Body-worn Accessory Exposure Conditions

For WWAN and LTE

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	

For Wi-Fi

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	

8.3. Hotspot Exposure Conditions

For WWAN and LTE

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	
Edge 1 (Top)	133 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01r01
Edge 2 (Right)	42.5 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01r01
Edge 3 (Bottom)	1.5 mm	Yes	
Edge 4 (Left)	1.5 mm	Yes	

For Wi-Fi

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	
Edge 1 (Top)	15.5 mm	Yes	
Edge 2 (Right)	3.5 mm	Yes	
Edge 3 (Bottom)	67 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01r01
Edge 4 (Left)	62 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01r01

9. RF Output Power Measurement

9.1. GSM

GSM (GMSK) - Voice Mode

Band	Ch No.	Freq. (MHz)	Avg burst Pwr (dBm)
850	128	824.2	32.7
	190	836.6	32.8
	251	848.8	32.8

GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Avg Power (dBm)							
			1 time slot		2 time slots		3 time slots		4 time slots	
			Burst	Frame	Burst	Frame	Burst	Frame	Burst	Frame
850	128	824.2	32.7	23.7	31.2	25.2	30.0	25.7	28.5	25.5
	190	836.6	32.8	23.8	31.3	25.3	30.1	25.8	28.6	25.6
	251	848.8	32.8	23.8	31.3	25.3	30.1	25.8	28.6	25.6

EGPRS (8PSK) - Coding Scheme: MCS5

Band	Ch No.	Freq. (MHz)	Avg Power (dBm)							
			1 time slot		2 time slots		3 time slots		4 time slots	
			Burst	Frame	Burst	Frame	Burst	Frame	Burst	Frame
850	128	824.2	27.1	18.1	26.1	20.1	25.1	19.1	23.5	20.5
	190	836.6	27.0	18.0	26.0	20.0	25.1	19.1	23.5	20.5
	251	848.8	27.0	18.0	26.0	20.0	25.0	19.0	23.5	20.5

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn Accessory: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 3 time slots, based on the output power measurements above
- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode

GSM (GMSK) - Voice Mode

Band	Ch No.	Freq. (MHz)	Avg burst Pwr (dBm)
1900	512	1850.2	29.5
	661	1880.0	29.6
	810	1909.8	29.5

GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Avg Power (dBm)				Avg Power (dBm)			
			1 time slot		2 time slots		3 time slots		4 time slots	
			Burst	Frame	Burst	Frame	Burst	Frame	Burst	Frame
1900	512	1850.2	29.5	20.5	28.5	22.5	27.4	23.1	25.7	22.7
	661	1880.0	29.6	20.6	28.5	22.5	27.4	23.1	25.8	22.8
	810	1909.8	29.5	20.5	28.5	22.5	27.3	23.0	25.7	22.7

EGPRS (8PSK) - Coding Scheme: MCS5

Band	Ch No.	Freq. (MHz)	Avg Power (dBm)				Avg Power (dBm)			
			1 time slot		2 time slots		3 time slots		4 time slots	
			Burst	Frame	Burst	Frame	Burst	Frame	Burst	Frame
1900	512	1850.2	26.3	17.3	25.4	19.4	24.3	20.0	22.7	19.7
	661	1880.0	26.3	17.3	25.4	19.4	24.3	20.0	22.7	19.7
	810	1909.8	26.2	17.2	25.3	19.3	24.3	20.0	22.6	19.6

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn Accessory: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 3 time slots, based on the output power measurements above
- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode

9.2. W-CDMA

Release 99

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band V	Rel 99 (RMC, 12.2 kbps)	4132	826.4	22.2
		4183	836.6	22.4
		4233	846.6	22.4
W-CDMA Band II	Rel 99 (RMC, 12.2 kbps)	9262	1852.4	22.1
		9400	1880.0	22.1
		9538	1907.6	22.1

HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
MPR (dB)	0	0	0.5	0.5	
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	22.0
		4183	836.6	22.2
		4233	846.6	22.2
	Subtest 2	4132	826.4	21.9
		4183	836.6	22.0
		4233	846.6	22.0
	Subtest 3	4132	826.4	21.6
		4183	836.6	21.8
		4233	846.6	21.8
	Subtest 4	4132	826.4	21.5
		4183	836.6	21.6
		4233	846.6	21.6
W-CDMA Band II	Subtest 1	9262	1852.4	21.3
		9400	1880.0	21.3
		9538	1907.6	21.3
	Subtest 2	9262	1852.4	20.8
		9400	1880.0	20.8
		9538	1907.6	20.8
	Subtest 3	9262	1852.4	20.5
		9400	1880.0	20.5
		9538	1907.6	20.5
	Subtest 4	9262	1852.4	20.2
		9400	1880.0	20.2
		9538	1907.6	20.2

Maximum output power levels that are possible for all subtests reported.

HSPA (HSDPA & HSUPA)

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA	HSPA	HSPA	HSPA	HSPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	15/15
	β_{ec}	209/225	12/15	30/15	2/15	24/15
	β_c/β_d	11/15	6/15	15/9	2/15	15/15
	β_{hs}	22/15	12/15	30/15	4/15	30/15
	β_{ed}	1309/225	94/75	47/15	56/75	134/15
CM (dB)	1.0	3.0	2.0	3.0	1.0	
MPR (dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
Ahs = β_{hs}/β_c	30/15					
HSUPA Specific Settings	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO 4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	21.7
		4183	836.6	22.2
		4233	846.6	22.2
	Subtest 2	4132	826.4	20.6
		4183	836.6	22.2
		4233	846.6	22.3
	Subtest 3	4132	826.4	21.6
		4183	836.6	21.8
		4233	846.6	21.7
	Subtest 4	4132	826.4	20.9
		4183	836.6	22.2
		4233	846.6	22.2
	Subtest 5	4132	826.4	21.2
		4183	836.6	22.0
		4233	846.6	22.0
W-CDMA Band II	Subtest 1	9262	1852.4	21.3
		9400	1880.0	21.3
		9538	1907.6	21.3
	Subtest 2	9262	1852.4	20.1
		9400	1880.0	20.1
		9538	1907.6	20.1
	Subtest 3	9262	1852.4	20.8
		9400	1880.0	20.8
		9538	1907.6	20.8
	Subtest 4	9262	1852.4	20.5
		9400	1880.0	20.5
		9538	1907.6	20.5
	Subtest 5	9262	1852.4	21.9
		9400	1880.0	21.9
		9538	1907.6	21.9

HSPA+

Since 16QAM is not used for uplink, the uplink Category and release is same as HSUPA. Therefore, the RF conducted power is not measured.

9.3. LTE Band

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

LTE Band 5 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20450	20525	20600
						829 MHz	836.5 MHz	844 MHz
LTE Band 5	10	QPSK	1	0	0	22.2	22.1	22.1
			1	25	0	22.2	22.0	22.0
			1	49	0	22.0	21.8	21.8
			25	0	1	21.2	21.0	21.0
			25	11	1	21.2	21.0	20.9
			25	24	1	21.1	20.9	20.9
			50	0	1	21.1	21.0	20.9
		16QAM	1	0	1	21.1	21.4	21.0
			1	25	1	21.0	21.3	20.8
			1	49	1	20.9	21.3	20.6
			25	0	2	20.2	20.1	20.0
			25	11	2	20.2	20.0	20.0
			25	24	2	20.1	19.9	19.9
			50	0	2	20.1	20.0	19.9
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20425	20525	20625
						826.5 MHz	836.5 MHz	846.5 MHz
LTE Band 5	5	QPSK	1	0	0	22.3	22.2	21.9
			1	12	0	22.4	22.1	22.0
			1	24	0	22.3	22.0	22.0
			12	0	1	21.3	21.1	21.0
			12	6	1	21.3	21.1	20.9
			12	11	1	21.2	21.0	20.9
			25	0	1	21.2	21.1	21.0
		16QAM	1	0	1	21.3	21.4	21.3
			1	12	1	21.4	21.4	21.4
			1	24	1	21.2	21.4	21.3
			12	0	2	20.2	20.1	20.0
			12	6	2	20.2	20.1	19.9
			12	11	2	20.2	20.1	19.9
			25	0	2	20.3	20.0	19.9
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20415	20525	20635
						825.5 MHz	836.5 MHz	847.5 MHz
LTE Band 5	3	QPSK	1	0	0	22.1	22.1	22.0
			1	7	0	22.1	22.0	22.0
			1	14	0	22.2	22.0	21.9
			8	0	1	21.3	21.1	20.9
			8	4	1	21.2	21.0	20.9
			8	7	1	21.2	20.9	20.9
			15	0	1	21.2	21.0	20.9
		16QAM	1	0	1	21.1	21.3	20.9
			1	7	1	21.1	21.4	21.0
			1	14	1	21.2	21.3	20.9
			8	0	2	20.3	19.9	20.1
			8	4	2	20.3	19.9	20.1
			8	7	2	20.3	19.9	20.0
			15	0	2	20.2	20.0	19.8

LTE Band 5 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20407	20525	20643
						824.7 MHz	836.5 MHz	848.3 MHz
LTE Band 5	1.4	QPSK	1	0	0	22.2	22.1	21.9
			1	2	0	22.2	22.1	21.9
			1	5	0	22.2	22.1	21.9
			3	0	0	22.2	22.1	21.9
			3	1	0	22.2	22.1	21.9
			3	2	0	22.2	22.1	21.9
			6	0	1	21.2	21.1	20.9
		16QAM	1	0	1	21.3	21.5	21.1
			1	2	1	21.3	21.5	21.1
			1	5	1	21.3	21.4	21.0
			3	0	1	21.3	21.2	21.0
			3	1	1	21.3	21.2	21.0
			3	2	1	21.3	21.1	20.9
			6	0	2	20.3	19.9	20.0

9.4. Wi-Fi (2.4 GHz Band)

Required Test Channels per KDB 248227 D01

Mode	Band	GHz	Channel	"Default Test Channels"	
				802.11b	802.11g
802.11b/g	2.4 GHz	2.412	1 [#]	√	∇
		2.437	6	√	∇
		2.462	11 [#]	√	∇

Notes:

√ = "default test channels"

∇ = possible 802.11g channels with maximum average output ¼ dB ≥ the "default test channels"

[#] = when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Avg Pwr (dBm)	SAR Test (Yes/No)
2.4 (DTS)	802.11b	1 Mbps	1	2412	17.2	Yes
			6	2437	17.5	
			11	2462	17.5	
	802.11g	6 Mbps	1	2412	14.0	No
			6	2437	14.2	
			11	2462	14.3	
	802.11n (HT20)	MCS0	1	2412	13.2	No
			6	2437	13.1	
			11	2462	13.0	

Note(s):

Per KDB 248227 D01, SAR is not required for 802.11g/HT20 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels.

Power measurements to determine worst-case data rates

Mode	Ch #	Freq. (MHz)	Data Rate	Avg Pwr (dBm)	SAR test (Yes/No)
802.11b	6	2437	1 Mbps	17.5	Yes
			2 Mbps	17.5	No
			5.5 Mbps	17.5	No
			11 Mbps	17.4	No

9.5. Wi-Fi (5 GHz Bands)

Required Test Channels per KDB 248227 D01

Mode		Band	GHz	Channel	"Default Test Channels"	
					802.11a	
802.11a	UNII (15.407)	5.2 GHz	5.180	36	√	
			5.200	40		*
			2.220	44		*
			5.240	48	√	
		5.3 GHz	5.260	52	√	
			5.280	56		*
			5.300	60		*
			5.320	64	√	
		5.5 GHz	5.500	100		
			5.520	104	√	
			5.540	108		*
			5.560	112		*
	5.580		116	√		
	5.600		120		*	
	5.620		124	√		
	5.640		128		*	
	5.8 GHz	5.660	132		*	
		5.680	136	√		
		5.700	140		*	
		5.745	149	√		
DTS (15.247)	5.8 GHz	5.765	153		*	
		5.785	157	√		
		5.805	161		*	
		5.825	165	√		

√ = "default test channels"

* = possible 802.11a channels with maximum average output > the "default test channels"

= when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Avg Pwr (dBm)	SAR Test (Yes/No)
5.2 (UNII)	802.11a	6 Mbps	36	5180	13.0	Yes
			40	5200	12.9	
			44	5220	13.0	
			48	5240	13.1	
	802.11n (HT20)	MCS0	36	5180	12.8	No
			40	5200	12.9	
			48	5240	13.0	
	802.11n (HT40)	MCS0	38	5190	12.0	No
			46	5230	12.2	
	802.11ac (HT20)	MCS0	36	5180	11.2	No
			40	5200	11.1	
			48	5240	11.3	
802.11ac (HT40)	MCS0	38	5190	11.1	No	
		46	5230	11.1		
802.11ac (HT80)	MCS0	42	5210	11.1	No	
5.3 (UNII)	802.11a	6 Mbps	52	5260	13.0	Yes
			56	5280	13.0	
			60	5300	13.0	
			64	5320	13.2	
	802.11n (HT20)	MCS0	52	5260	12.9	No
			60	5300	13.0	
			64	5320	13.1	
	802.11n (HT40)	MCS0	54	5270	12.1	No
			62	5310	12.2	
	802.11ac (HT20)	MCS0	52	5260	11.1	No
			60	5300	11.2	
			64	5320	11.3	
	802.11ac (HT40)	MCS0	54	5270	11.0	No
			62	5310	11.1	
802.11ac (HT80)	MCS0	58	5290	11.2	No	

Note(s):

Per KDB 248227, SAR is not required for 802.11n HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11a channels.

Band (GHz)	Mode	Mode	Ch #	Freq. (MHz)	Avg Pwr (dBm)	SAR Test (Yes/No)
5.5 (UNII)	802.11a	6 Mbps	100	5500	13.0	Yes
			104	5520	13.2	
			108	5540	13.2	
			112	5560	13.2	
			116	5580	13.4	
			120	5600	13.3	
			124	5620	13.4	
			128	5640	13.4	
			132	5660	13.4	
			136	5680	13.4	
	140	5700	13.5			
	802.11n (HT20)	MCS0	100	5500	13.1	No
			116	5580	13.3	
			140	5700	13.5	
	802.11n (HT40)	MCS0	102	5510	12.1	No
			110	5550	12.3	
			134	5670	12.5	
	802.11ac (HT20)	MCS0	100	5500	11.2	No
			116	5580	11.4	
			140	5700	11.5	
	802.11ac (HT40)	MCS0	134	5670	11.5	No
142			5710	11.5		
802.11ac (HT80)	MCS0	106	5530	11.5	No	
		138	5690	11.5		
5.8 (DTS)	802.11a	6 Mbps	149	5745	13.4	Yes
			153	5765	13.3	
			157	5785	13.4	
			161	5805	13.5	
			165	5825	13.5	
	802.11n (HT20)	MCS0	149	5745	13.3	No
			157	5785	13.3	
			161	5805	13.4	
	802.11n (HT40)	MCS0	151	5755	12.3	No
			159	5795	12.4	
	802.11ac (HT20)	MCS0	149	5745	11.4	No
			157	5785	11.5	
			165	5825	11.5	
	802.11ac (HT40)	MCS0	151	5755	11.5	No
159			5795	11.5		
802.11ac (HT80)	MCS0	155	5775	11.5	No	

Note(s):

Per KDB 248227, SAR is not required for 802.11n HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11a channels.

Power measurements to determine worst-case data rates

Band	Mode	Ch #	Freq. (MHz)	Data Rate	Avg Pwr (dBm)	SAR test (Yes/No)
5.2 GHz (UNII)	802.11a	36	5180	6 Mbps	13.0	Yes
				9 Mbps	12.7	No
				12 Mbps	12.6	No
				18 Mbps	12.3	No
				24 Mbps	11.9	No
				36 Mbps	11.4	No
				48 Mbps	11.1	No
				54 Mbps	10.8	No
5.3 GHz (UNII)	802.11a	56	5280	6 Mbps	13.0	Yes
				9 Mbps	12.8	No
				12 Mbps	12.6	No
				18 Mbps	12.4	No
				24 Mbps	12.1	No
				36 Mbps	11.6	No
				48 Mbps	11.3	No
				54 Mbps	11.0	No
5.5 GHz (UNII)	802.11a	116	5580	6 Mbps	13.4	Yes
				9 Mbps	13.0	No
				12 Mbps	12.9	No
				18 Mbps	12.7	No
				24 Mbps	12.2	No
				36 Mbps	11.9	No
				48 Mbps	11.7	No
				54 Mbps	11.2	No
5.8 GHz (DTS)	802.11a	149	5745	6 Mbps	13.5	Yes
				9 Mbps	13.1	No
				12 Mbps	13.0	No
				18 Mbps	12.8	No
				24 Mbps	12.4	No
				36 Mbps	12.0	No
				48 Mbps	11.6	No
				54 Mbps	11.5	No

9.6. Bluetooth

Maximum tune-up tolerance limit is 10.5 dBm from the rated nominal maximum output power. This power level qualifies for exclusion of SAR testing.

Refer to Standalone SAR Test Exclusion Considerations Section.

10. Tissue Dielectric Properties

IEEE Std 1528-2003 Table 2

Target Frequency (MHz)	Head	
	ϵ_r	σ (S/m)
300	45.3	0.87
450	43.5	0.87
835	41.5	0.90
900	41.5	0.97
1450	40.5	1.20
1800 – 2000	40.0	1.40
2450	39.2	1.80
2600	39.0	1.96
3000	38.5	2.40

FCC OET Bulletin 65 Supplement C 01-01

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

10.1. Tissue Dielectric Parameter Check Results

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within ± 2°C of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

SAR Room 1

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
12/19/2013	Body 1900	e'	52.4700	Relative Permittivity (ϵ_r):	52.47	53.30	-1.56	5
		e"	14.2800	Conductivity (σ):	1.51	1.52	-0.75	5
	Body 1850	e'	52.6400	Relative Permittivity (ϵ_r):	52.64	53.30	-1.24	5
		e"	14.1700	Conductivity (σ):	1.46	1.52	-4.10	5
	Body 1910	e'	52.4400	Relative Permittivity (ϵ_r):	52.44	53.30	-1.61	5
		e"	14.3300	Conductivity (σ):	1.52	1.52	0.12	5
12/19/2013	Head 1900	e'	40.8100	Relative Permittivity (ϵ_r):	40.81	40.00	2.03	5
		e"	13.4300	Conductivity (σ):	1.42	1.40	1.34	5
	Head 1850	e'	40.9900	Relative Permittivity (ϵ_r):	40.99	40.00	2.48	5
		e"	13.2800	Conductivity (σ):	1.37	1.40	-2.42	5
	Head 1910	e'	40.7700	Relative Permittivity (ϵ_r):	40.77	40.00	1.93	5
		e"	13.4600	Conductivity (σ):	1.43	1.40	2.11	5
12/27/2013	Body 1900	e'	54.2400	Relative Permittivity (ϵ_r):	54.24	53.30	1.76	5
		e"	14.2900	Conductivity (σ):	1.51	1.52	-0.68	5
	Body 1850	e'	54.4400	Relative Permittivity (ϵ_r):	54.44	53.30	2.14	5
		e"	14.1800	Conductivity (σ):	1.46	1.52	-4.04	5
	Body 1910	e'	54.2000	Relative Permittivity (ϵ_r):	54.20	53.30	1.69	5
		e"	14.3000	Conductivity (σ):	1.52	1.52	-0.09	5
1/2/2014	Body 1900	e'	53.1300	Relative Permittivity (ϵ_r):	53.13	53.30	-0.32	5
		e"	14.3000	Conductivity (σ):	1.51	1.52	-0.61	5
	Body 1850	e'	53.2700	Relative Permittivity (ϵ_r):	53.27	53.30	-0.06	5
		e"	14.1700	Conductivity (σ):	1.46	1.52	-4.10	5
	Body 1910	e'	53.1000	Relative Permittivity (ϵ_r):	53.10	53.30	-0.38	5
		e"	14.3300	Conductivity (σ):	1.52	1.52	0.12	5
1/2/2014	Head 1900	e'	41.1900	Relative Permittivity (ϵ_r):	41.19	40.00	2.97	5
		e"	13.3400	Conductivity (σ):	1.41	1.40	0.67	5
	Head 1850	e'	41.3500	Relative Permittivity (ϵ_r):	41.35	40.00	3.38	5
		e"	13.2100	Conductivity (σ):	1.36	1.40	-2.94	5
	Head 1910	e'	41.1400	Relative Permittivity (ϵ_r):	41.14	40.00	2.85	5
		e"	13.3600	Conductivity (σ):	1.42	1.40	1.35	5

SAR Room 2

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)		
12/19/2013	Head 5180	e'	37.1000	Relative Permittivity (ϵ_r):	37.10	36.01	3.02	5	
		e"	15.4900	Conductivity (σ):	4.46	4.63	-3.65	5	
	Head 5200	e'	37.0600	Relative Permittivity (ϵ_r):	37.06	35.99	2.97	5	
		e"	15.5200	Conductivity (σ):	4.49	4.65	-3.52	5	
	Head 5600	e'	36.5300	Relative Permittivity (ϵ_r):	36.53	35.53	2.80	5	
		e"	15.7500	Conductivity (σ):	4.90	5.06	-3.08	5	
	Head 5800	e'	36.2400	Relative Permittivity (ϵ_r):	36.24	35.30	2.66	5	
		e"	15.8400	Conductivity (σ):	5.11	5.27	-3.07	5	
	Head 5825	e'	36.2400	Relative Permittivity (ϵ_r):	36.24	35.30	2.66	5	
		e"	15.8800	Conductivity (σ):	5.14	5.27	-2.40	5	
	12/22/2013	Body 5180	e'	47.7400	Relative Permittivity (ϵ_r):	47.74	49.05	-2.66	5
			e"	18.7300	Conductivity (σ):	5.39	5.27	2.34	5
Body 5200		e'	47.6900	Relative Permittivity (ϵ_r):	47.69	49.02	-2.71	5	
		e"	18.7300	Conductivity (σ):	5.42	5.29	2.28	5	
Body 5600		e'	47.0500	Relative Permittivity (ϵ_r):	47.05	48.48	-2.95	5	
		e"	18.9800	Conductivity (σ):	5.91	5.76	2.59	5	
Body 5800		e'	46.7700	Relative Permittivity (ϵ_r):	46.77	48.20	-2.97	5	
		e"	19.1600	Conductivity (σ):	6.18	6.00	2.98	5	
Body 5825		e'	46.7200	Relative Permittivity (ϵ_r):	46.72	48.20	-3.07	5	
		e"	19.1900	Conductivity (σ):	6.22	6.00	3.59	5	
12/26/2013		Body 5180	e'	50.6400	Relative Permittivity (ϵ_r):	50.64	49.05	3.25	5
			e"	18.3600	Conductivity (σ):	5.29	5.27	0.32	5
	Body 5200	e'	50.7100	Relative Permittivity (ϵ_r):	50.71	49.02	3.45	5	
		e"	18.4100	Conductivity (σ):	5.32	5.29	0.53	5	
	Body 5600	e'	50.0500	Relative Permittivity (ϵ_r):	50.05	48.48	3.24	5	
		e"	18.8200	Conductivity (σ):	5.86	5.76	1.72	5	
	Body 5800	e'	49.9100	Relative Permittivity (ϵ_r):	49.91	48.20	3.55	5	
		e"	19.1100	Conductivity (σ):	6.16	6.00	2.72	5	
	Body 5825	e'	49.8000	Relative Permittivity (ϵ_r):	49.80	48.20	3.32	5	
		e"	19.0600	Conductivity (σ):	6.17	6.00	2.89	5	
	12/26/2013	Head 5180	e'	35.4100	Relative Permittivity (ϵ_r):	35.41	36.01	-1.67	5
			e"	15.5500	Conductivity (σ):	4.48	4.63	-3.28	5
Head 5200		e'	35.4400	Relative Permittivity (ϵ_r):	35.44	35.99	-1.53	5	
		e"	15.6010	Conductivity (σ):	4.51	4.65	-3.01	5	
Head 5600		e'	34.9200	Relative Permittivity (ϵ_r):	34.92	35.53	-1.73	5	
		e"	15.7400	Conductivity (σ):	4.90	5.06	-3.15	5	
Head 5800		e'	34.7200	Relative Permittivity (ϵ_r):	34.72	35.30	-1.64	5	
		e"	15.9600	Conductivity (σ):	5.15	5.27	-2.33	5	
Head 5825		e'	34.6400	Relative Permittivity (ϵ_r):	34.64	35.30	-1.87	5	
		e"	15.8800	Conductivity (σ):	5.14	5.27	-2.40	5	

SAR Room 3

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
12/18/2013	Head 2450	e'	38.3900	Relative Permittivity (ϵ_r):	38.39	39.20	-2.07	5
		e"	13.6600	Conductivity (σ):	1.86	1.80	3.38	5
	Head 2410	e'	38.5500	Relative Permittivity (ϵ_r):	38.55	39.28	-1.86	5
		e"	13.5300	Conductivity (σ):	1.81	1.76	2.99	5
	Head 2475	e'	38.2800	Relative Permittivity (ϵ_r):	38.28	39.17	-2.27	5
		e"	13.7100	Conductivity (σ):	1.89	1.83	3.27	5
12/18/2013	Body 2450	e'	52.9600	Relative Permittivity (ϵ_r):	52.96	52.70	0.49	5
		e"	14.2200	Conductivity (σ):	1.94	1.95	-0.66	5
	Body 2410	e'	53.0800	Relative Permittivity (ϵ_r):	53.08	52.76	0.61	5
		e"	14.0500	Conductivity (σ):	1.88	1.91	-1.30	5
	Body 2475	e'	52.8500	Relative Permittivity (ϵ_r):	52.85	52.67	0.34	5
		e"	14.3000	Conductivity (σ):	1.97	1.99	-0.87	5

SAR Room 4

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
12/18/2013	Head 835	e'	40.6600	Relative Permittivity (ϵ_r):	40.66	41.50	-2.02	5
		e"	20.0100	Conductivity (σ):	0.93	0.90	3.23	5
	Head 820	e'	40.8200	Relative Permittivity (ϵ_r):	40.82	41.60	-1.88	5
		e"	20.0600	Conductivity (σ):	0.91	0.90	1.80	5
	Head 850	e'	40.4600	Relative Permittivity (ϵ_r):	40.46	41.50	-2.51	5
		e"	19.9600	Conductivity (σ):	0.94	0.92	3.10	5
12/18/2013	Body 835	e'	52.8600	Relative Permittivity (ϵ_r):	52.86	55.20	-4.24	5
		e"	21.8200	Conductivity (σ):	1.01	0.97	4.44	5
	Body 820	e'	53.0600	Relative Permittivity (ϵ_r):	53.06	55.28	-4.01	5
		e"	21.9000	Conductivity (σ):	1.00	0.97	3.10	5
	Body 850	e'	52.7100	Relative Permittivity (ϵ_r):	52.71	55.16	-4.44	5
		e"	21.7600	Conductivity (σ):	1.03	0.99	4.18	5

11. System Performance Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are remeasured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

11.1. System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ±0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm ± 0.5 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm ± 0.5 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
 For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
 For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

11.2. Reference SAR Values for System Performance Check

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (mW/g)		
				1g/10g	Head	Body
D835V2	4d117	5/28/2013	835	1g	9.54	9.4
				10g	6.21	6.16
D1900V2	5d140	04/18/2013	1900	1g	41.2	41.5
				10g	21.5	22.0
D2450V2	706	5/29/2013	2450	1g	53.70	49.90
				10g	25.00	23.3
D5GHzV2	1003	9/19/2013	5.2	1g	78.50	73.3
				10g	22.40	20.5
			5.5	1g	81.00	78.6
				10g	23.00	21.8
			5.8	1g	76.40	72.7
				10g	21.70	20.1

11.3. System Performance Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR Room 1

Date Tested	System Dipole		T.S. Liquid	Measured Results			Target (Ref. Value)	Delta ±10 %	Est./Zoom Ratio	Plot No.	
	Type	Serial #		Area Scan	Zoom Scan	Normalize to 1 W					
12/19/2013	D1900V2	5d140	Body	1g	4.15	4.11	41.10	41.50	-0.96	0.96	
				10g	2.09	2.15	21.50	22.00	-2.27		
12/19/2013	D1900V2	5d140	Head	1g	4.36	4.34	43.40	41.20	5.34	0.46	1,2
				10g	2.28	2.25	22.50	21.50	4.65		
12/27/2013	D1900V2	5d140	Body	1g	4.09	4.08	40.80	41.50	-1.69	0.24	
				10g	2.08	2.12	21.20	22.00	-3.64		
1/2/2014	D1900V2	5d140	Body	1g	4.09	4.07	40.70	41.50	-1.93	0.49	
				10g	2.06	2.12	21.20	22.00	-3.64		
1/2/2014	D1900V2	5d140	Head	1g	4.25	4.27	42.70	41.20	3.64	-0.47	
				10g	2.33	2.22	22.20	21.50	3.26		

SAR Room 2

Date Tested	System Dipole		T.S. Liquid	Measured Results			Target (Ref. Value)	Delta ±10 %	Est./Zoom Ratio	Plot No.	
	Type	Serial #		Area Scan	Zoom Scan	Normalize to 1 W					
12/19/2013	D5GHzV2 (5.2 GHz)	1003	Head	1g	7.78	8.34	83.40	78.50	6.24	-7.20	3,4
				10g	2.15	2.37	23.70	22.40	5.80		
12/19/2013	D5GHzV2 (5.6 GHz)	1003	Head	1g	8.07	8.73	87.30	81.0	7.78	-8.18	5,6
				10g	2.25	2.50	25.00	23.0	8.70		
12/19/2013	D5GHzV2 (5.8 GHz)	1003	Head	1g	7.08	7.76	77.60	76.40	1.57	-9.60	
				10g	1.98	2.24	22.40	21.70	3.23		
12/22/2013	D5GHzV2 (5.2 GHz)	1003	Body	1g	7.07	7.24	72.40	73.3	-1.23	-2.40	
				10g	2.08	1.97	19.70	20.5	-3.90		
12/22/2013	D5GHzV2 (5.6 GHz)	1003	Body	1g	8.85	8.11	81.10	78.6	3.18	8.36	
				10g	2.47	2.26	22.60	21.8	3.67		
12/22/2013	D5GHzV2 (5.8 GHz)	1003	Body	1g	7.37	7.01	70.10	72.7	-3.58	4.88	7,8
				10g	2.08	1.97	19.70	20.1	-1.99		
12/26/2013	D5GHzV2 (5.2 GHz)	1003	Body	1g	7.14	7.26	72.60	73.3	-0.95	-1.68	
				10g	1.98	2.05	20.50	20.5	0.00		
12/26/2013	D5GHzV2 (5.6 GHz)	1003	Body	1g	7.80	8.19	81.90	78.6	4.20	-5.00	
				10g	2.14	2.30	23.00	21.8	5.50		
12/26/2013	D5GHzV2 (5.8 GHz)	1003	Body	1g	6.39	7.23	72.30	72.7	-0.55	-13.15	
				10g	1.78	2.03	20.30	20.1	1.00		

SAR Room 3

Date Tested	System Dipole		T.S. Liquid	Measured Results			Target (Ref. Value)	Delta ±10 %	Est./Zoom Ratio	Plot No.	
	Type	Serial #		Area Scan	Zoom Scan	Normalize to 1 W					
12/18/2013	D2450V2	706	Head	1g	5.45	5.35	53.50	53.7	-0.37	1.83	
				10g	2.39	2.43	24.30	25.0	-2.80		
12/18/2013	D2450V2	706	Body	1g	5.03	5.07	50.70	49.9	1.60	-0.80	9,10
				10g	2.13	2.35	23.50	23.3	0.86		

SAR Room 4

Date Tested	System Dipole		T.S. Liquid	Measured Results			Target (Ref. Value)	Delta ±10 %	Est./Zoom Ratio	Plot No.	
	Type	Serial #		Area Scan	Zoom Scan	Normalize to 1 W					
12/18/2013	D835V2	4d117	Head	1g	1.04	1.01	10.10	9.54	5.87	2.88	
				10g	0.698	0.659	6.59	6.21	6.12		
12/18/2013	D835V2	4d117	Body	1g	0.983	1.00	10.00	9.4	6.38	-1.73	11,12
				10g	0.661	0.659	6.59	6.16	6.98		

12. SAR Test Results

12.1. GSM850

RF Exposure Conditions	Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Left Touch	Voice	0	190	836.6	33.0	32.8	0.257	0.269	13
	Left Tilt	Voice	0	190	836.6	33.0	32.8	0.173	0.181	
	Right Touch	Voice	0	190	836.6	33.0	32.8	0.232	0.243	
	Right Tilt	Voice	0	190	836.6	33.0	32.8	0.157	0.164	
Head VoIP	Left Touch	GPRS 3 Slots	0	190	836.6	30.5	30.1	0.440	0.482	14
	Left Tilt	GPRS 3 Slots	0	190	836.6	30.5	30.1	0.262	0.287	
	Right Touch	GPRS 3 Slots	0	190	836.6	30.5	30.1	0.363	0.398	
	Right Tilt	GPRS 3 Slots	0	190	836.6	30.5	30.1	0.259	0.284	
Body	Rear	Voice	10	190	836.6	33.0	32.8	0.440	0.461	15
	Front	Voice	10	190	836.6	33.0	32.8	0.307	0.321	
Hotspot	Rear	GPRS 3 Slots	10	190	836.6	30.5	30.1	0.683	0.749	16
	Front	GPRS 3 Slots	10	190	836.6	30.5	30.1	0.495	0.543	
	Edge 3	GPRS 3 Slots	10	190	836.6	30.5	30.1	0.372	0.408	
	Edge 4	GPRS 3 Slots	10	190	836.6	30.5	30.1	0.622	0.682	

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- With headset attached. According to KDB 648474 Section 2.3, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

12.2. GSM1900

RF Exposure Conditions	Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Left Touch	Voice	0	661	1880.0	30.0	29.6	0.151	0.166	17
	Left Tilt	Voice	0	661	1880.0	30.0	29.6	0.063	0.069	
	Right Touch	Voice	0	661	1880.0	30.0	29.6	0.092	0.101	
	Right Tilt	Voice	0	661	1880.0	30.0	29.6	0.074	0.081	
Head VoIP	Left Touch	GPRS 3 Slots	0	661	1880.0	27.5	27.4	0.264	0.270	18
	Left Tilt	GPRS 3 Slots	0	661	1880.0	27.5	27.4	0.119	0.122	
	Right Touch	GPRS 3 Slots	0	661	1880.0	27.5	27.4	0.180	0.184	
	Right Tilt	GPRS 3 Slots	0	661	1880.0	27.5	27.4	0.141	0.144	
Body	Rear	Voice	10	661	1880.0	30.0	29.6	0.317	0.348	
	Front	Voice	10	661	1880.0	30.0	29.6	0.489	0.536	19
Hotspot	Rear	GPRS 3 Slots	10	661	1880.0	27.5	27.4	0.528	0.540	
	Front	GPRS 3 Slots	10	512	1850.2	27.5	27.4	0.790	0.808	
				661	1880.0	27.5	27.4	0.866	0.886	
				810	1909.8	27.5	27.3	0.913	0.956	
	Edge 3	GPRS 3 Slots	10	661	1880.0	27.5	27.4	0.534	0.546	
	Edge 4	GPRS 3 Slots	10	661	1880.0	27.5	27.4	0.085	0.087	

Repeated Test

RF Exposure Conditions	Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Hotspot	Front	GPRS 3 Slots	10	810	1909.8	27.5	27.3	0.920	0.963	20

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- With headset attached. According to KDB 648474 Section 2.3, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

12.3. W-CDMA Band V

RF Exposure Conditions	Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Left Touch	Rel 99 RMC	0	4183	836.6	22.5	22.4	0.224	0.229	21
	Left Tilt	Rel 99 RMC	0	4183	836.6	22.5	22.4	0.156	0.160	
	Right Touch	Rel 99 RMC	0	4183	836.6	22.5	22.4	0.181	0.185	
	Right Tilt	Rel 99 RMC	0	4183	836.6	22.5	22.4	0.147	0.150	
Body & Hotspot	Rear	Rel 99 RMC	10	4183	836.6	22.5	22.4	0.298	0.305	22
	Front	Rel 99 RMC	10	4183	836.6	22.5	22.4	0.244	0.250	
Hotspot	Edge 3	Rel 99 RMC	10	4183	836.6	22.5	22.4	0.187	0.191	
	Edge 4	Rel 99 RMC	10	4183	836.6	22.5	22.4	0.323	0.331	23

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- With headset attached. According to KDB 648474 Section 2.3, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

12.4. W-CDMA Band II

RF Exposure Conditions	Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Left Touch	Rel 99 RMC	0	9400	1880.0	22.5	22.1	0.217	0.238	24
	Left Tilt	Rel 99 RMC	0	9400	1880.0	22.5	22.1	0.084	0.092	
	Right Touch	Rel 99 RMC	0	9400	1880.0	22.5	22.1	0.134	0.147	
	Right Tilt	Rel 99 RMC	0	9400	1880.0	22.5	22.1	0.108	0.118	
Body & Hotspot	Rear	Rel 99 RMC	10	9400	1880.0	22.5	22.1	0.462	0.507	
	Front	Rel 99 RMC	10	9262	1852.4	22.5	22.1	0.839	0.920	
	Front	Rel 99 RMC	10	9400	1880.0	22.5	22.1	0.852	0.934	25
	Front	Rel 99 RMC	10	9538	1907.6	22.5	22.1	0.789	0.865	
Hotspot	Edge 3	Rel 99 RMC	10	9400	1880.0	22.5	22.1	0.380	0.417	
	Edge 4	Rel 99 RMC	10	9400	1880.0	22.5	22.1	0.236	0.259	

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- With headset attached. According to KDB 648474 Section 2.3, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

12.5. LTE Band 5 (BW=10 MHz)

RF Exposure Conditions	Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	Left Touch	QPSK	0	20525	836.6	1	0	23.0	22.1	0.214	0.264	26
						25	11	22.0	21.0	0.172	0.216	
	Left Tilt	QPSK	0	20525	836.6	1	0	23.0	22.1	0.141	0.174	
						25	11	22.0	21.0	0.127	0.159	
	Right Touch	QPSK	0	20525	836.6	1	0	23.0	22.1	0.187	0.231	
						25	11	22.0	21.0	0.137	0.172	
	Right Tilt	QPSK	0	20525	836.6	1	0	23.0	22.1	0.140	0.173	
						25	11	22.0	21.0	0.102	0.128	
Body & Hotspot	Rear	QPSK	10	20525	836.6	1	0	23.0	22.1	0.355	0.439	27
						25	11	22.0	21.0	0.251	0.315	
	Front	QPSK	10	20525	836.6	1	0	23.0	22.1	0.244	0.302	
						25	11	22.0	21.0	0.177	0.222	
Hotspot	Edge 3	QPSK	10	20525	836.6	1	0	23.0	22.1	0.164	0.203	
						25	11	22.0	21.0	0.141	0.177	
	Edge 4	QPSK	10	20525	836.6	1	0	23.0	22.1	0.379	0.468	28
						25	11	22.0	21.0	0.322	0.404	

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- Per KDB 941225 D05 SAR for LTE Devices, SAR test reduction is applied using the following criteria:
 - Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
 - When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
 - Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
 - Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
 - Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

12.6. Wi-Fi (DTS Band)

RF Exposure Conditions	Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Left Touch	802.11b	0	6	2437	17.5	17.5	0.336	0.336	29
	Left Tilt	802.11b	0	6	2437	17.5	17.5	0.161	0.161	
	Right Touch	802.11b	0	6	2437	17.5	17.5	0.104	0.104	
	Right Tilt	802.11b	0	6	2437	17.5	17.5	0.105	0.105	
Body & Hotspot	Rear	802.11b	10	6	2437	17.5	17.5	0.236	0.236	30
	Front	802.11b	10	6	2437	17.5	17.5	0.066	0.066	
Hotspot	Edge 1	802.11b	10	6	2437	17.5	17.5	0.106	0.106	
	Edge 2	802.11b	10	6	2437	17.5	17.5	0.040	0.040	
RF Exposure Conditions	Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Left Touch	802.11a	0	165	5825	13.5	13.5	0.028	0.028	31
	Left Tilt	802.11a	0	165	5825	13.5	13.5	0.011	0.011	
	Right Touch	802.11a	0	165	5825	13.5	13.5	<0.001	<0.001	
	Right Tilt	802.11a	0	165	5825	13.5	13.5	<0.001	<0.001	
Body	Rear	802.11a	10	165	5825	13.5	13.5	0.031	0.031	32
	Front	802.11a	10	165	5825	13.5	13.5	<0.001	<0.001	

802.11ac Mode

RF Exposure Conditions	Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Right Tilt	802.11ac	0	165	5825	11.5	11.5	<0.001	<0.001	
Body & Hotspot	Rear	802.11ac	10	165	5825	11.5	11.5	0.031	0.031	

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- Apply usual 802.11 test exclusion considerations, but include 802.11ac SAR for highest 802.11a configuration in each frequency band and each exposure condition according to April 2013 TCB Workshop Updates.

12.7. Wi-Fi (UNII Band)

RF Exposure Conditions	Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Left Touch	802.11a	0	48	5240	13.5	13.1	0.057	0.063	33
				64	5320	13.5	13.2	0.066	0.071	34
				140	5680	13.5	13.5	0.022	0.022	35
	Left Tilt	802.11a	0	48	5240	13.5	13.1	0.035	0.039	
				64	5320	13.5	13.2	0.032	0.035	
				140	5680	13.5	13.5	0.007	0.007	
	Right Touch	802.11a	0	48	5240	13.5	13.1	0.019	0.021	
				64	5320	13.5	13.2	0.013	0.014	
				140	5680	13.5	13.5	<0.001	<0.001	
	Right Tilt	802.11a	0	48	5240	13.5	13.1	0.012	0.013	
				64	5320	13.5	13.2	0.013	0.014	
				140	5680	13.5	13.5	<0.001	<0.001	
Body	Rear	802.11a	10	48	5240	13.5	13.1	0.207	0.229	36
				64	5320	13.5	13.2	0.219	0.234	37
				140	5680	13.5	13.5	0.028	0.028	38
	Front	802.11a	10	48	5240	13.5	13.1	0.013	0.014	
				64	5320	13.5	13.2	0.166	0.177	
				140	5680	13.5	13.5	<0.001	<0.001	

802.11ac Mode

RF Exposure Conditions	Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Right Touch	802.11ac	0	48	5240	11.5	11.3	0.032	0.033	
			0	64	5320	11.5	11.3	0.035	0.036	
			0	140	5680	11.5	11.5	0.002	0.002	
Body	Rear	802.11ac	10	48	5240	11.5	11.3	0.161	0.169	
			10	64	5320	11.5	11.3	0.173	0.182	
			10	140	5680	11.5	11.5	0.025	0.025	

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- Apply usual 802.11 test exclusion considerations, but include 802.11ac SAR for highest 802.11a configuration in each frequency band and each exposure condition according to April 2013 TCB Workshop Updates.

12.8. Bluetooth

12.8.1. Standalone SAR Test Exclusion Considerations

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$, for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Body-worn Accessory Exposure Conditions

Max. tune-up tolerance limit		Min. test separation distance (mm)	Frequency (GHz)	Result
(dBm)	(mW)			
10.5	11	10	2.480	1.8

Conclusion:

The computed value is < 3 ; therefore, Bluetooth qualifies for Standalone SAR test exclusion.

12.8.2. Estimated SAR

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}/x}] \text{ W/kg}$ for test separation distances ≤ 50 mm; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Estimated SAR Result for Body-worn Accessory Conditions:

Test Configuration	Max. tune-up tolerance limit (mW)	Min. test separation distance (mm)	Frequency (GHz)	Estimated 1-g SAR (W/kg)
Rear/Front	11	10	2.480	0.231

13. SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01r01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

13.1. The Highest Measured SAR Configuration in Each Frequency Band

Frequency Band (MHz)	Air Interface	Head (W/kg)	Body-worn Accessory (W/kg)	Hotspot/Wi-Fi Direct (W/kg)
850	GSM 850			0.683
	WCDMA Band V			0.323
	LTE Band 5			0.379
1900	GSM 1900			0.913
	WCDMA Band II		0.852	
2400	Wi-Fi 802.11b/g/n	0.336		
5200	Wi-Fi 802.11a/n/ac		0.207	
5300	Wi-Fi 802.11a/n/ac		0.219	
5500	Wi-Fi 802.11a/n/ac		0.028	
5800	Wi-Fi 802.11a/n/ac		0.031	

13.2. Repeated Measurement Results

Head Exposure Condition

Not Applicable.

Body-worn Accessory Exposure Condition

Frequency band	Test Position	Mode	Ch #.	Freq. (MHz)	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio	Note
					Original	Repeated		
W-CDMA Band II	Front	Rel 99 RMC	9538	1907.6	0.852	0.848	1.00	1

Hotspot Mode Exposure Conditions

Frequency band	Test Position	Mode	Ch #.	Freq. (MHz)	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio	Note
					Original	Repeated		
GSM1900	Front	GPRS 3slot	810	1909.8	0.913	0.920	1.01	1

Note(s):

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20.

14. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance v05, introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$

A new threshold of 0.04 is also introduced in the draft KDB. Thus, in order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri < 0.04$$

14.1. Sum of the SAR for GSM850 & Wi-Fi & BT

RF Exposure conditions	Test Position	Simultaneous Transmission Scenario				Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
		GSM 850	WiFi DTS Band	WiFi UNII Band	Bluetooth		
Head	Left Touch	0.482	0.336			0.818	No
		0.482		0.071		0.553	No
	Left Tilt	0.287	0.161			0.448	No
		0.287		0.039		0.326	No
	Right Touch	0.398	0.104			0.502	No
		0.398		0.021		0.419	No
Right Tilt	0.284	0.105			0.389	No	
	0.284		0.014		0.298	No	
Body-worn Accessory & Hotspot	Rear	0.749	0.236			0.985	No
		0.749		0.234		0.983	No
		0.749			0.231	0.980	No
	Front	0.543	0.066			0.609	No
		0.543		0.117		0.660	No
		0.543			0.231	0.774	No
Hotspot	Edge 1	0	0.106			0.106	No
	Edge 2	0	0.040			0.040	No
	Edge 3	0.408	0			0.408	No
	Edge 4	0.682	0			0.682	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

14.2. Sum of the SAR for GSM1900 & Wi-Fi & BT

RF Exposure conditions	Test Position	Simultaneous Transmission Scenario				Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
		GSM 1900	WiFi DTS Band	WiFi UNII Band	Bluetooth		
Head	Left Touch	0.270	0.336			0.606	No
		0.270		0.071		0.341	No
	Left Tilt	0.122	0.161			0.283	No
		0.122		0.039		0.161	No
	Right Touch	0.184	0.104			0.288	No
		0.184		0.021		0.205	No
Right Tilt	0.144	0.105			0.249	No	
	0.144		0.014		0.158	No	
Body-worn Accessory & Hotspot	Rear	0.540	0.236			0.776	No
		0.540		0.234		0.774	No
		0.540			0.231	0.771	No
	Front	0.963	0.066			1.029	No
		0.963		0.117		1.080	No
		0.963			0.231	1.194	No
Hotspot	Edge 1	0	0.106			0.106	No
	Edge 2	0	0.040			0.040	No
	Edge 3	0.546	0			0.546	No
	Edge 4	0.087	0			0.087	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

14.3. Sum of the SAR for WCDMA Band V & Wi-Fi & BT

RF Exposure conditions	Test Position	Simultaneous Transmission Scenario				Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
		W-CDMA Band V	WiFi DTS Band	WiFi UNII Band	Bluetooth		
Head	Left Touch	0.229	0.336			0.565	No
		0.229		0.071		0.300	No
	Left Tilt	0.160	0.161			0.321	No
		0.160		0.039		0.199	No
	Right Touch	0.185	0.104			0.289	No
		0.185		0.021		0.206	No
Right Tilt	0.150	0.105			0.255	No	
	0.150		0.014		0.164	No	
Body-worn Accessory & Hotspot	Rear	0.305	0.236			0.541	No
		0.305		0.234		0.539	No
		0.305			0.231	0.536	No
	Front	0.250	0.066			0.316	No
		0.250		0.117		0.367	No
		0.250			0.231	0.481	No
Hotspot	Edge 1	0	0.106			0.106	No
	Edge 2	0	0.040			0.040	No
	Edge 3	0.191	0			0.191	No
	Edge 4	0.331	0			0.331	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

14.4. Sum of the SAR for WCDMA Band II & Wi-Fi & BT

RF Exposure conditions	Test Position	Simultaneous Transmission Scenario				Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
		W-CDMA Band II	WiFi DTS Band	WiFi UNII Band	Bluetooth		
Head	Left Touch	0.238	0.336			0.574	No
		0.238		0.071		0.309	No
	Left Tilt	0.092	0.161			0.253	No
		0.092		0.039		0.131	No
	Right Touch	0.147	0.104			0.251	No
		0.147		0.021		0.168	No
Right Tilt	0.118	0.105			0.223	No	
	0.118		0.014		0.132	No	
Body-worn Accessory & Hotspot	Rear	0.507	0.236			0.743	No
		0.507		0.234		0.741	No
		0.507			0.231	0.738	No
	Front	0.934	0.066			1.000	No
		0.934		0.117		1.051	No
		0.934			0.231	1.165	No
Hotspot	Edge 1	0	0.106			0.106	No
	Edge 2	0	0.040			0.040	No
	Edge 3	0.417	0			0.417	No
	Edge 4	0.259	0			0.259	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

14.5. Sum of the SAR for LTE Band 5 & Wi-Fi & BT

RF Exposure conditions	Test Position	Simultaneous Transmission Scenario				Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
		LTE Band 5	WiFi DTS Band	WiFi UNII Band	Bluetooth		
Head	Left Touch	0.264	0.336			0.600	No
		0.264		0.071		0.335	No
	Left Tilt	0.174	0.161			0.335	No
		0.174		0.039		0.213	No
	Right Touch	0.231	0.104			0.335	No
		0.231		0.021		0.252	No
Right Tilt	0.173	0.105			0.278	No	
	0.173		0.014		0.187	No	
Body-worn Accessory & Hotspot	Rear	0.439	0.236			0.675	No
		0.439		0.234		0.673	No
		0.439			0.231	0.670	No
	Front	0.302	0.066			0.368	No
		0.302		0.117		0.419	No
		0.302			0.231	0.533	No
Hotspot	Edge 1	0	0.106			0.106	No
	Edge 2	0	0.040			0.040	No
	Edge 3	0.203	0			0.203	No
	Edge 4	0.468	0			0.468	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

15. Appendixes

Refer to separated files for the following appendixes.

- 15.1. Photos and Antenna Locations**
- 15.2. System Performance Check Plots**
- 15.3. Highest SAR Test Plots**
- 15.4. Calibration Certificate for E-Field Probe EX3DV4 - SN 3929**
- 15.5. Calibration Certificate for E-Field Probe EX3DV4 - SN 3773**
- 15.6. Calibration Certificate for E-Field Probe EX3DV4 - SN 3902**
- 15.7. Calibration Certificate for E-Field Probe EX3DV4 - SN 3936**
- 15.8. Calibration Certificate for D835V2 - SN 4d117**
- 15.9. Calibration Certificate for D1900V2 - SN 5d140**
- 15.10. Calibration Certificate for D2450V2 - SN 706**
- 15.11. Calibration Certificate for D5GHzV2 - SN 1003**

END OF REPORT