



# PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA  
Tel. 410.290.6652 / Fax 410.290.6654  
http://www.pctestlab.com



## MEASUREMENT REPORT FCC Part 22, 24

**Applicant Name:**  
Samsung Electronics, Co. Ltd.  
129, Samsung-ro, Maetan dong,  
Yeongtong-gu, Suwon-si  
Gyeonggi-do 443-742, Korea

**Date of Testing:**  
July 28 -Aug 15, 2013  
**Test Site/Location:**  
PCTEST Lab., Columbia, MD, USA  
**Test Report Serial No.:**  
0Y1307251428.A3L

<b>FCC ID:</b>	<b>A3LSMN9002</b>
<b>APPLICANT:</b>	<b>SAMSUNG ELECTRONICS, CO. LTD.</b>

**Application Type:** Certification  
**Model(s):** SM-N9002  
**EUT Type:** Portable Handset  
**FCC Classification:** PCS Licensed Transmitter Held to Ear (PCE)  
**FCC Rule Part(s):** §2 §22(H) §24(E)  
**Test Procedure(s):** ANSI/TIA-603-C-2004, KDB 971168 v02  
**Test Device Serial No.:** *identical prototype* [S/N: 1,4]

Mode	Tx Frequency (MHz)	Antenna Type	Emission Designator	ERP/EIRP	
		Main/Sub.		Max. Power (W)	Max. Power (dBm)
GSM850	824.2 - 848.8	Main	246KGXW	0.059	17.68
EDGE850	824.2 - 848.8	Main	240KG7W	0.040	16.01
GSM1900	1850.2 - 1909.8	Main	241KGXW	0.522	27.18
EDGE1900	1850.2 - 1909.8	Main	242KG7W	0.170	22.31
WCDMA850	826.4 - 846.6	Main	4M15F9W	0.005	6.95
WCDMA1900	1852.4 - 1907.6	Main	4M15F9W	0.079	18.98
GSM850	824.2 - 848.8	Sub.	245KGXW	0.149	21.73
GSM1900	1850.2 - 1909.8	Sub.	250KGXW	0.029	14.64

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez  
President




<b>FCC ID:</b> A3LSMN9002		<b>FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1307251428.A3L	<b>Test Dates:</b> July 28 -Aug 15, 2013	<b>EUT Type:</b> Portable Handset	Page 1 of 89	

# T A B L E O F C O N T E N T S


FCC PART 22, 24 MEASUREMENT REPORT .....		3
1.0 INTRODUCTION .....		4
1.1 SCOPE .....		4
1.2 TESTING FACILITY .....		4
2.0 PRODUCT INFORMATION.....		5
2.1 EQUIPMENT DESCRIPTION .....		5
2.2 DEVICE CAPABILITIES.....		5
2.3 TEST CONFIGURATION.....		5
2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS .....		5
3.0 DESCRIPTION OF TESTS .....		6
3.1 EVALUATION PROCEDURE .....		6
3.2 CELLULAR - BASE FREQUENCY BLOCKS.....		6
3.3 CELLULAR - MOBILE FREQUENCY BLOCKS.....		6
3.4 PCS - BASE FREQUENCY BLOCKS.....		7
3.5 PCS - MOBILE FREQUENCY BLOCKS.....		7
3.6 RADIATED MEASUREMENTS.....		8
4.0 TEST EQUIPMENT CALIBRATION DATA .....		9
5.0 SAMPLE CALCULATIONS .....		10
6.0 TEST RESULTS.....		11
6.1 SUMMARY.....		11
6.2 OCCUPIED BANDWIDTH (MAIN ANT.).....		12
6.3 OCCUPIED BANDWIDTH (SUB. ANT.).....		16
6.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL (MAIN ANT.) .....		18
6.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL (SUB. ANT.).....		33
6.6 BAND EDGE EMISSIONS AT ANTENNA TERMINAL (MAIN ANT.).....		42
6.7 BAND EDGE EMISSIONS AT ANTENNA TERMINAL (SUB. ANT.) .....		48
6.8 PEAK-AVERAGE RATIO (MAIN ANT.).....		51
6.9 PEAK-AVERAGE RATIO (SUB. ANT.).....		54
6.10 RADIATED POWER (ERP/EIRP) (MAIN ANT.).....		56
6.11 RADIATED POWER (ERP/EIRP) (SUB ANT.) .....		59
6.12 RADIATED SPURIOUS EMISSIONS MEASUREMENTS (MAIN ANT.).....		62
6.13 RADIATED SPURIOUS EMISSIONS MEASUREMENTS (SUB. ANT.) .....		70
6.14 FREQUENCY STABILITY / TEMPERATURE VARIATION (MAIN ANT.).....		75
6.15 FREQUENCY STABILITY / TEMPERATURE VARIATION (MAIN ANT.).....		84
7.0 CONCLUSION.....		89

<b>FCC ID:</b> A3LSMN9002	 <b>FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1307251428.A3L	<b>Test Dates:</b> July 28 -Aug 15, 2013	<b>EUT Type:</b> Portable Handset	Page 2 of 89



# MEASUREMENT REPORT

## FCC Part 22, 24



### §2.1033 General Information

**APPLICANT:** Samsung Electronics, Co. Ltd.  
**APPLICANT ADDRESS:** 129, Samsung-ro, Maetan dong,  
 Yeongtong-gu, Suwon-si, Gyeonggi-do 443-742, Korea  
**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.  
**TEST SITE ADDRESS:** 7185 Oakland Mills Road, Columbia, MD 21046 USA  
**FCC RULE PART(S):** §2 §22(H) §24(E)  
**BASE MODEL:** SM-N9002  
**FCC ID:** A3LSMN9002  
**FCC CLASSIFICATION:** PCS Licensed Transmitter Held to Ear (PCE)  
**MODE:** GSM / EDGE / WCDMA  
**FREQUENCY TOLERANCE:** ±0.00025 % (2.5 ppm)  
**Test Device Serial No.:** 1,4  Production  Pre-Production  Engineering  
**DATE(S) OF TEST:** July 28 -Aug 15, 2013  
**TEST REPORT S/N:** 0Y1307251428.A3L

### Test Facility / Accreditations

Measurements were performed at **PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.**

- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



<b>FCC ID:</b> A3LSMN9002		<b>FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1307251428.A3L	<b>Test Dates:</b> July 28 -Aug 15, 2013	<b>EUT Type:</b> Portable Handset	Page 3 of 89	

# 1.0 INTRODUCTION

## 1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

## 1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on February 15, 2012.

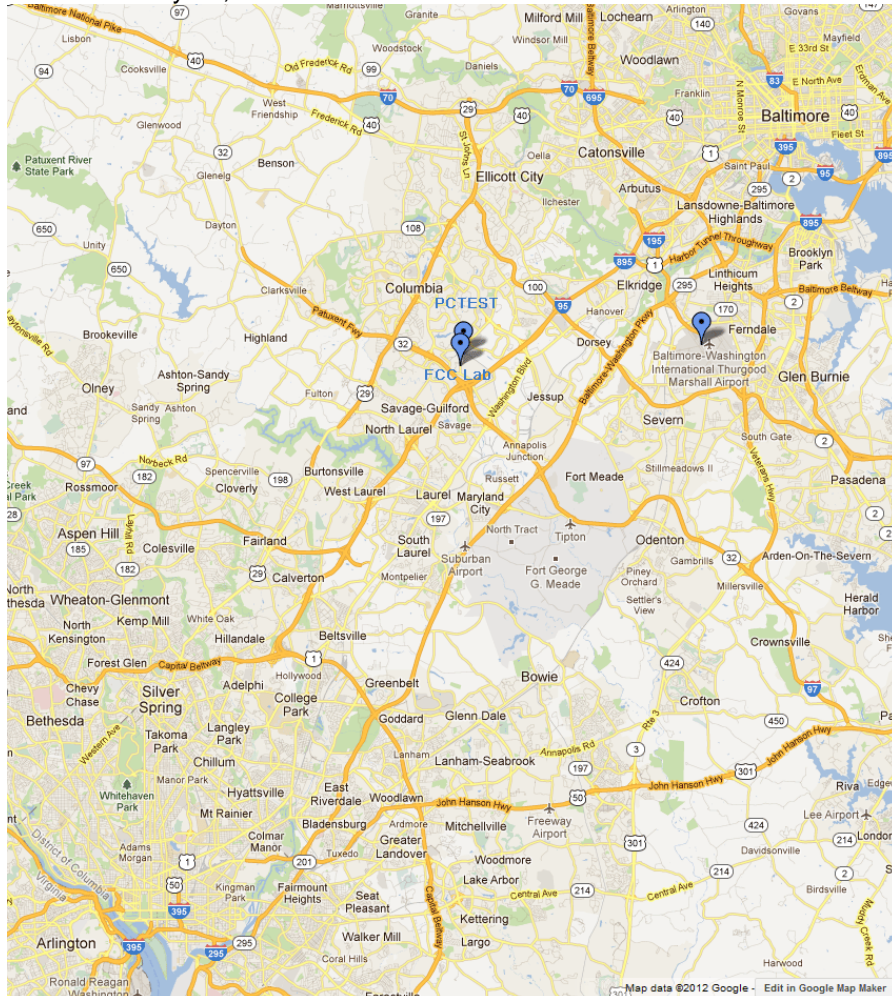




Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset	Page 4 of 89	

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMN9002**. The test data contained in this report pertains only to the emissions due to the EUT's 2G/3G licensed transmitters.

### 2.2 Device Capabilities

This device contains the following capabilities:



850/1900 GSM/GPRS/EDGE, 850/1900 WCDMA/HSPA, 802.11a/b/g/n/ac WLAN (DTS/NII), Bluetooth (1x,EDR, LE), NFC, ANT+

### 2.3 Test Configuration

The Samsung Portable Handset FCC ID: A3LSMN9002 was tested per the guidance of ANSI/TIA-603-C-2004 and KDB 971168 v02. See Section 6.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 5 of 89

## 3.0 DESCRIPTION OF TESTS


### 3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-C-2004) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 v02) were used in the measurement of the **Samsung Portable Handset FCC ID: A3LSMN9002**.

Deviation from Measurement Procedure.....None

### 3.2 Cellular - Base Frequency Blocks

§22.905

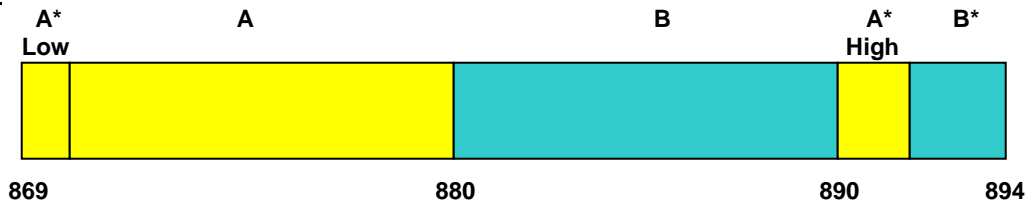

BLOCK 1: 869 – 880 MHz (A\* Low + A)


BLOCK 3: 890 – 891.5 MHz (A\* High)

BLOCK 2: 880 – 890 MHz (B)

BLOCK 4: 891.5 – 894 MHz (B\*)

### 3.3 Cellular - Mobile Frequency Blocks

§22.905

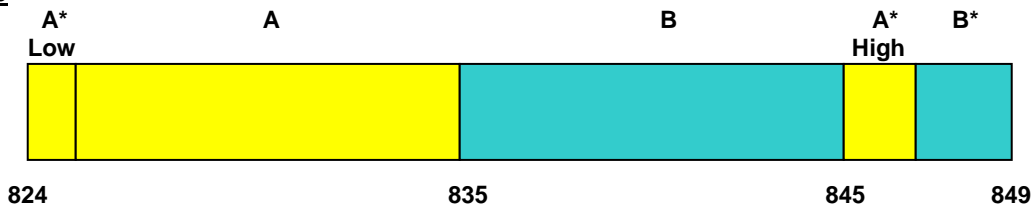



BLOCK 1: 824 – 835 MHz (A\* Low + A)

BLOCK 3: 845 – 846.5 MHz (A\* High)


BLOCK 2: 835 – 845 MHz (B)

BLOCK 4: 846.5 – 849 MHz (B\*)

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset	Page 6 of 89	

### 3.4 PCS - Base Frequency Blocks

§24.229

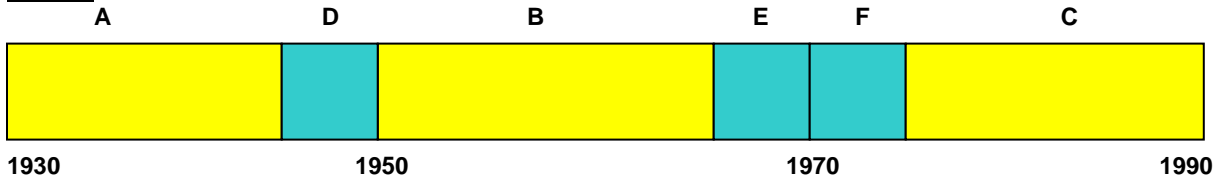

BLOCK 1: 1930 – 1945 MHz (A)

BLOCK 4: 1965 – 1970 MHz (E)

BLOCK 2: 1945 – 1950 MHz (D)


BLOCK 5: 1970 – 1975 MHz (F)

BLOCK 3: 1950 – 1965 MHz (B)

BLOCK 6: 1975 – 1990 MHz (C)

### 3.5 PCS - Mobile Frequency Blocks

§24.229

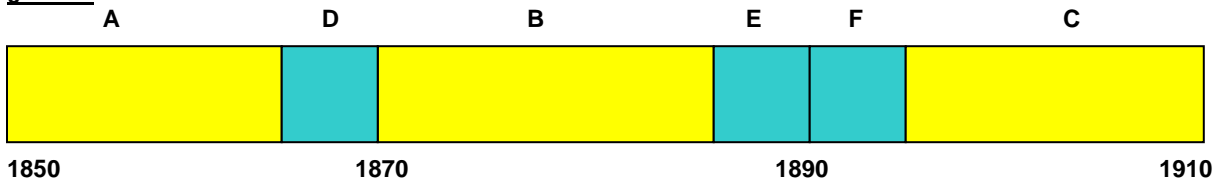

BLOCK 1: 1850 – 1865 MHz (A)



BLOCK 4: 1885 – 1890 MHz (E)

BLOCK 2: 1865 – 1870 MHz (D)

BLOCK 5: 1890 – 1895 MHz (F)

BLOCK 3: 1870 – 1885 MHz (B)

BLOCK 6: 1895 – 1910 MHz (C)

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 7 of 89

### 3.6 Radiated Measurements

**§2.1053 §22.913(a.2) §22.917(a) §24.232(c) §24.238(a) RSS-132(4.4) RSS-132(4.5.1) RSS-133(6.4) RSS-133(6.5.1)**

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A ¾" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. For the EUT positioning, "H" is defined with the EUT lying flat on the test surface, "H2" is defined with the EUT standing up on its side, and "V" is defined with the EUT standing upright.

Per the guidance of ANSI/TIA-603-C-2004, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [dBm] = P_g [dBm] - \text{cable loss} [dB] + \text{antenna gain} [dBd/dBi]$$

Where,  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g [dBm] - \text{cable loss} [dB]$ .

Radiated power levels are investigated with the receive antenna vertically polarized while radiated spurious emissions levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-C-2004.

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset	Page 8 of 89	

## 4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	3/29/2013	Annual	3/29/2014	N/A
-	RE2	Radiated Emissions Cable Set (VHF/UHF)	3/29/2013	Annual	3/29/2014	N/A
-	LTx2	Licensed Transmitter Cable Set	1/17/2013	Annual	1/17/2014	N/A
Agilent	8449B	(1-26.5GHz) Pre-Amplifier	4/17/2013	Annual	4/17/2014	3008A00985
Agilent	8648D	(9kHz-4GHz) Signal Generator	10/10/2012	Annual	10/10/2013	3613A00315
Agilent	N9020A	MXA Signal Analyzer	10/9/2012	Annual	10/9/2013	US46470561
Agilent	N9038A	MXE EMI Receiver	12/8/2012	Annual	12/8/2013	MY51210133
Anritsu	MA2411B	Pulse Sensor	9/19/2012	Annual	9/19/2013	1027293
Anritsu	ML2495A	Power Meter	10/11/2012	Annual	10/11/2013	1039008
Mini-Circuits	VHF-1300+	High Pass Filter	1/21/2013	Annual	1/21/2014	30716
Mini-Circuits	VHF-3100+	High Pass Filter	1/21/2013	Annual	1/21/2014	31144
Rohde & Schwarz	CMU200	Base Station Simulator	N/A		N/A	836536/0005
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Tx	10/3/2011	Biennial	10/3/2013	91052522TX
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	10/3/2011	Biennial	10/3/2013	91052523RX
Seekonk	NC-100	Torque Wrench (8" lb)	3/5/2012	Triennial	3/5/2015	N/A
Sunol	DRH-118	Horn Antenna (1 - 18GHz)	6/19/2013	Biennial	6/19/2015	A050307
Sunol	DRH-118	Horn Antenna (1-18 GHz)	6/19/2013	Biennial	6/19/2015	A042511

**Table 4-1. Test Equipment**

**Notes:**

1. Equipment used for signaling with a calibration date of "N/A" shown in this list was only used for maintaining a link between the piece of equipment and the EUT. This equipment was not used to make direct calibrated measurements.

<b>FCC ID:</b> A3LSMN9002		<b>FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1307251428.A3L	<b>Test Dates:</b> July 28 -Aug 15, 2013	<b>EUT Type:</b> Portable Handset	Page 9 of 89	

## 5.0 SAMPLE CALCULATIONS

### GSM Emission Designator

**Emission Designator = 250KGXW**

GSM BW = 250 kHz  
 G = Phase Modulation  
 X = Cases not otherwise covered  
 W = Combination (Audio/Data)

### EDGE Emission Designator

**Emission Designator = 250KG7W**

EDGE BW = 250 kHz  
 G = Phase Modulation  
 7 = Quantized/Digital Info  
 W = Combination (Audio/Data)

### WCDMA Emission Designator

**Emission Designator = 4M16F9W**

WCDMA BW = 4.16 MHz  
 F = Frequency Modulation  
 9 = Composite Digital Info  
 W = Combination (Audio/Data) (Measured at the 99.75% power bandwidth)

### Spurious Radiated Emission

**Example: Spurious emission at 3700.40 MHz**

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was  $-81.0$  dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0$  dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of  $-30.9$  dBm yielding  $-24.80$  dBm. The fundamental EIRP was 25.50 dBm so this harmonic was  $25.50$  dBm  $- (-24.80) = 50.3$  dBc.

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset	Page 10 of 89	

## 6.0 TEST RESULTS

### 6.1 Summary



Company Name: Samsung Electronics, Co. Ltd.  
 FCC ID: A3LSMN9002  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 Mode(s): GSM / EDGE / WCDMA

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
<b>TRANSMITTER MODE (TX)</b>					
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 6.2
2.1051 22.917(a) 24.238(a)	Conducted Band Edge / Spurious Emissions	> 43 + log <sub>10</sub> (P[Watts]) at Band Edge and for all out-of-band emissions		PASS	Sections 6.4, 6.6
24.232(d)	Peak-Average Ratio	< 13 dB		PASS	Section 6.8
2.1046	Transmitter Conducted Output Power	N/A		PASS	RF Exposure Report
2.1055 22.355 24.235	Frequency Stability	< 2.5 ppm (Part 22) Emission must remain in band (Part 24)		PASS	Section 6.14
22.913(a.2)	Effective Radiated Power	< 7 Watts max. ERP	RADIATED	PASS	Section 6.10
24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS	Section 6.10
2.1053 22.917(a) 24.238(a)	Radiated Spurious Emissions	> 43 + log <sub>10</sub> (P[Watts]) for all out-of-band emissions		PASS	Section 6.12

**Table 6-1. Summary of Test Results**

**Notes:**

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "2G/3G Automation", Version 2.0.

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset	Page 11 of 89	

## 6.2 Occupied Bandwidth (Main Ant.)

### §2.1049 RSS-Gen(4.6.1) RSS-133(2.3)

#### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Procedure Used


KDB 971168 v02 – Section 4.2

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

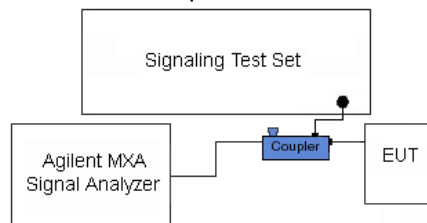


**Figure 6-1. Test Instrument & Measurement Setup**

#### Test Notes

None.

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 12 of 89

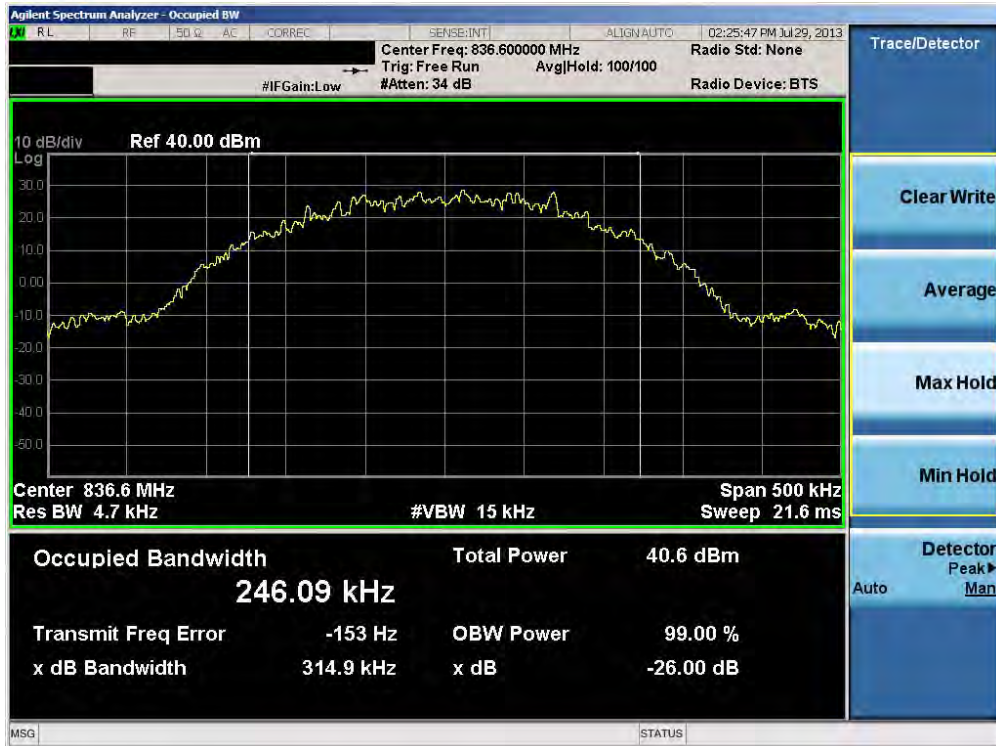


Plot 6-1. Occupied Bandwidth Plot (Cellular GSM Mode – Ch. 190)



Plot 6-2. Occupied Bandwidth Plot (EDGE850 Mode – Ch. 190)

FCC ID: A3LSMN9002	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 13 of 89

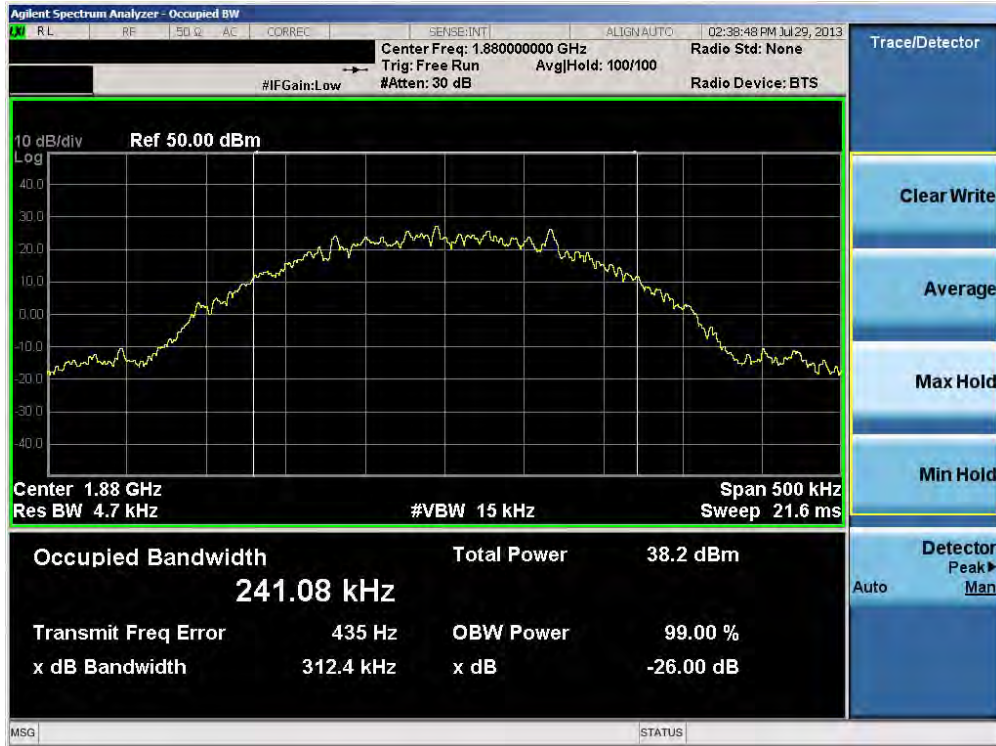


Plot 6-3. Occupied Bandwidth Plot (PCS GSM Mode – Ch. 661)




Plot 6-4. Occupied Bandwidth Plot (EDGE1900 Mode – Ch. 661)

FCC ID: A3LSMN9002	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 14 of 89

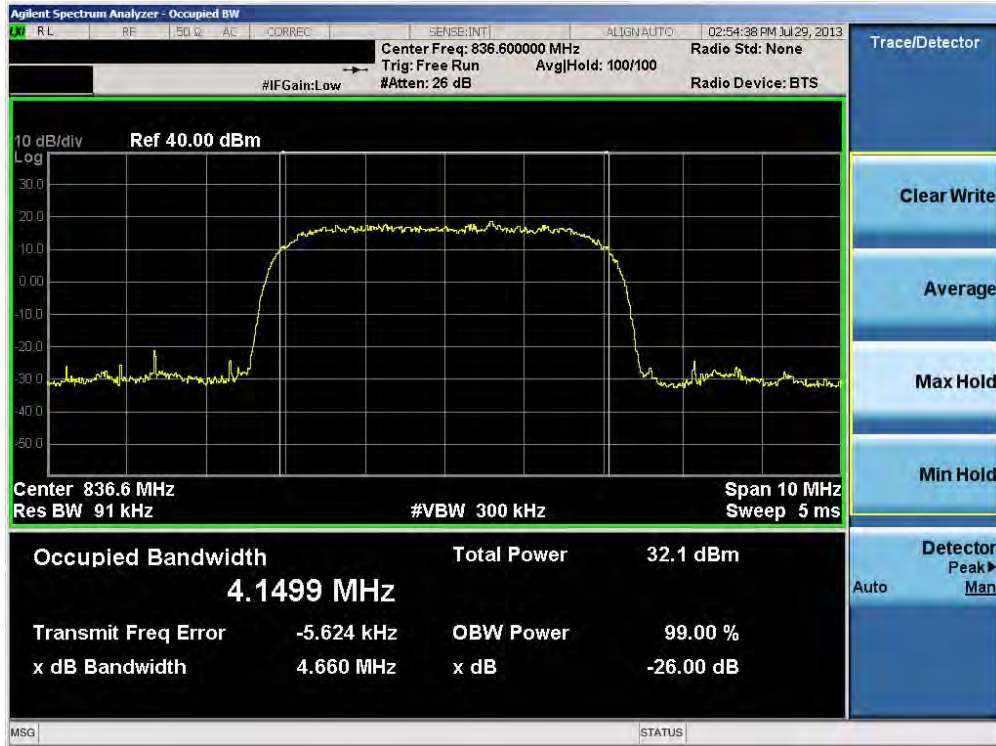

Plot 6-5. Occupied Bandwidth Plot (Cellular WCDMA Mode – Ch. 4183)

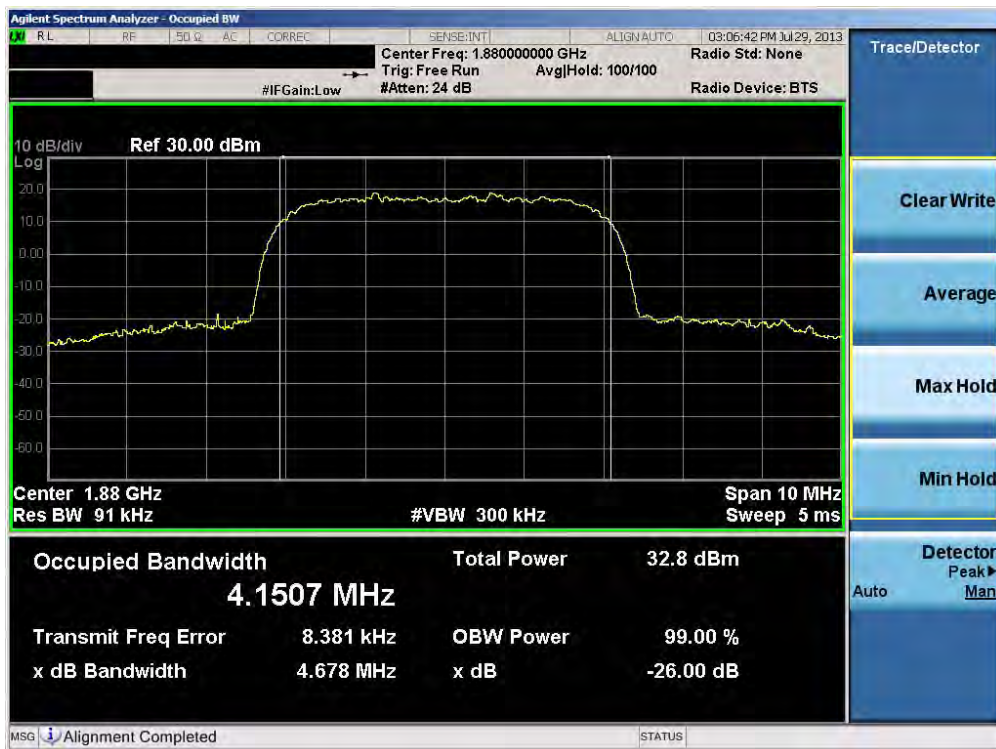

Plot 6-6. Occupied Bandwidth Plot (PCS WCDMA Mode – Ch. 9400)

FCC ID: A3LSMN9002	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 15 of 89

### 6.3 Occupied Bandwidth (Sub. Ant.)

#### §2.1049 RSS-Gen(4.6.1) RSS-133(2.3)

#### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Procedure Used


KDB 971168 v02 – Section 4.2

#### Test Settings

9. The signal analyzer’s automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
10. RBW = 1 – 5% of the expected OBW
11. VBW  $\geq$  3 x RBW
12. Detector = Peak
13. Trace mode = max hold
14. Sweep = auto couple
15. The trace was allowed to stabilize
16. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

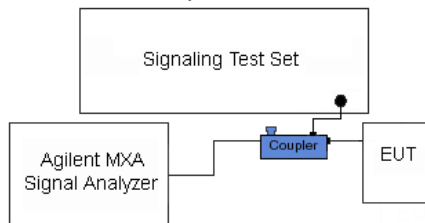

**Figure 6-2. Test Instrument & Measurement Setup**


#### Test Notes

None.

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset	Page 16 of 89	



Plot 6-7. Occupied Bandwidth Plot (Cellular GSM Mode – Ch. 190)

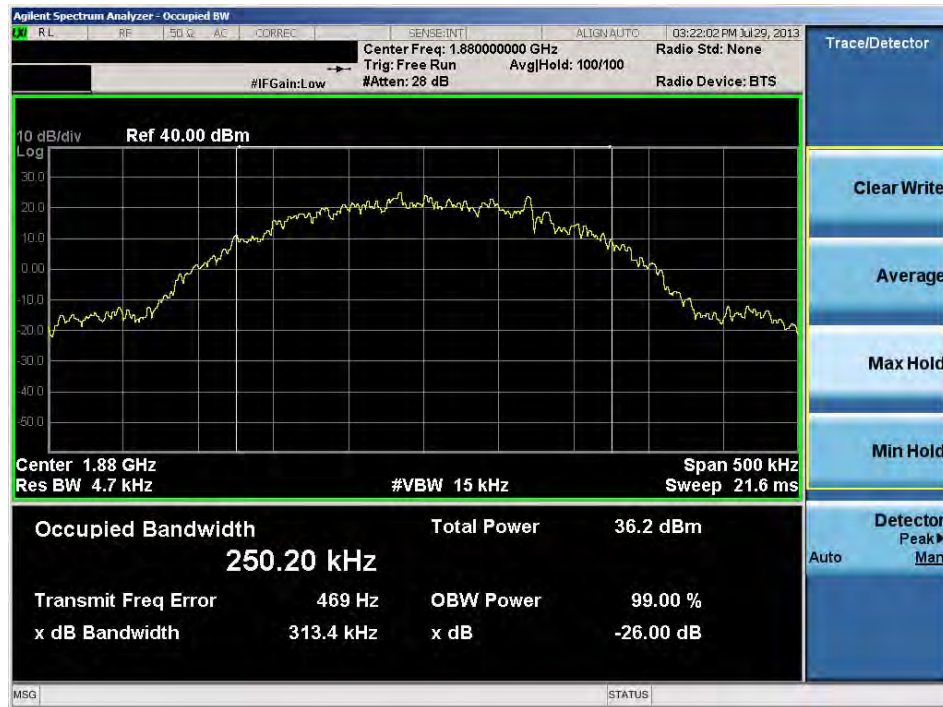

Plot 6-8. Occupied Bandwidth Plot (PCS GSM Mode – Ch. 661)

FCC ID: A3LSMN9002	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 17 of 89

## 6.4 Spurious and Harmonic Emissions at Antenna Terminal (Main Ant.)

§2.1051 §22.917(a) §24.238(a) RSS-132(4.5.1) RSS-133(6.5.1)

### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P_{[Watts]})$ , where  $P$  is the transmitter power in Watts.***

### Test Procedure Used


KDB 971168 v02 – Section 6.0

### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into at least two plots per channel)
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = RMS
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

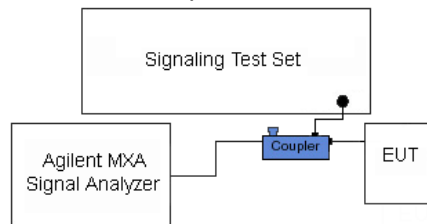


**Figure 6-3. Test Instrument & Measurement Setup**

### Test Notes


Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for Part 22 and 1 MHz or greater for Part 24. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset	Page 18 of 89	



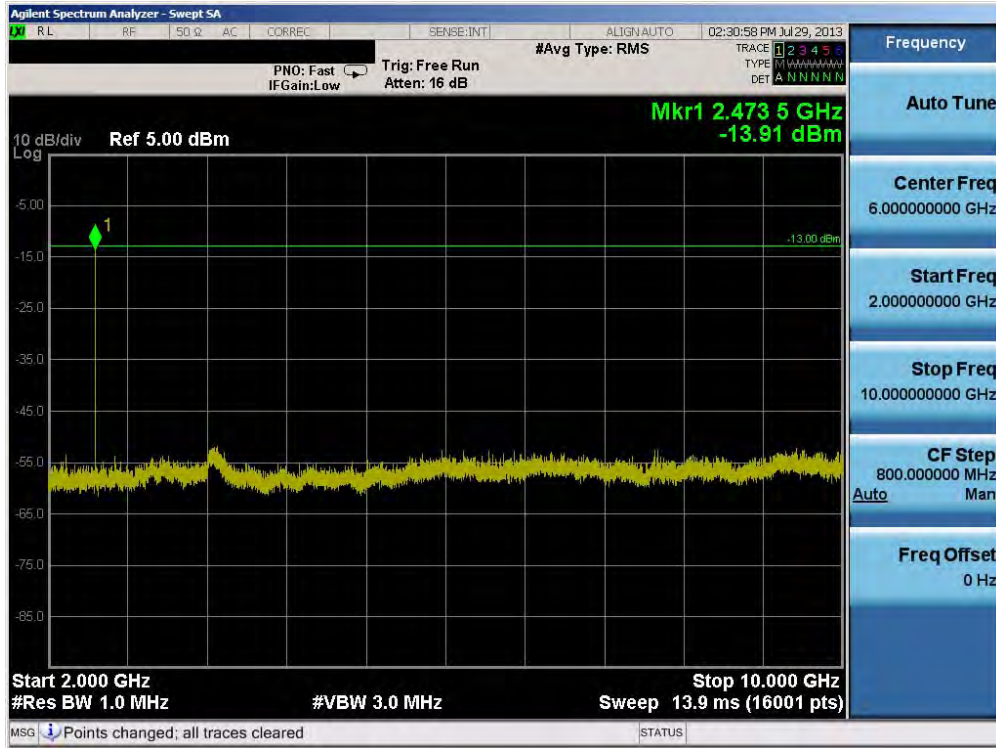


Plot 6-11. Conducted Spurious Plot (Cellular GSM Mode – Ch. 128)

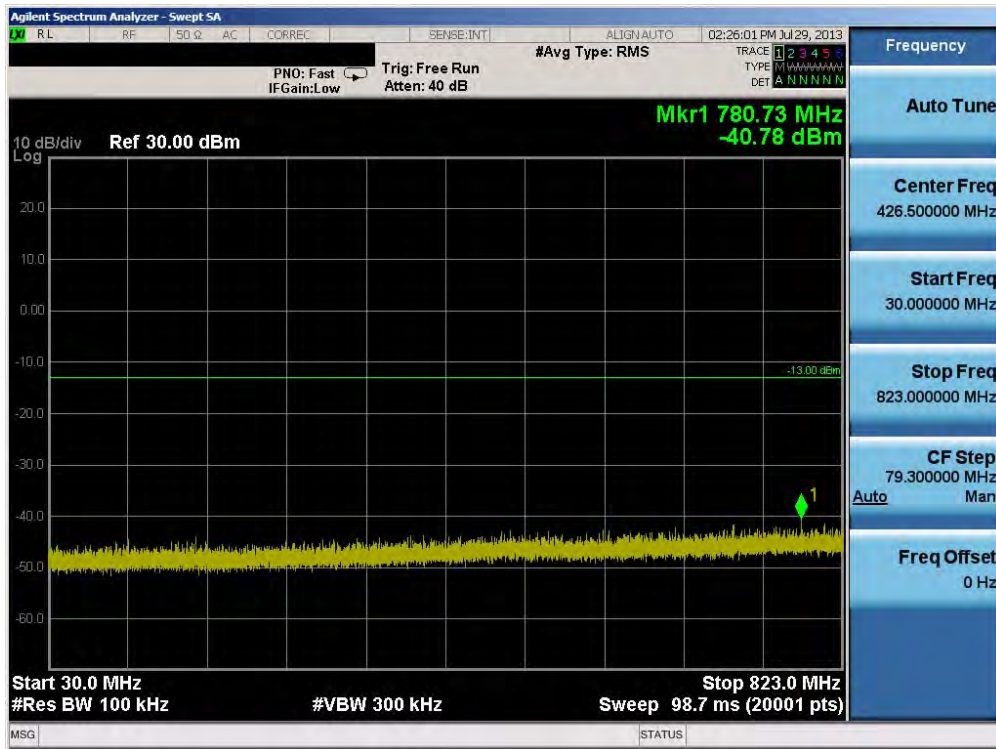


Plot 6-12. Conducted Spurious Plot (Cellular GSM Mode – Ch. 190)

FCC ID: A3LSMN9002	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 20 of 89

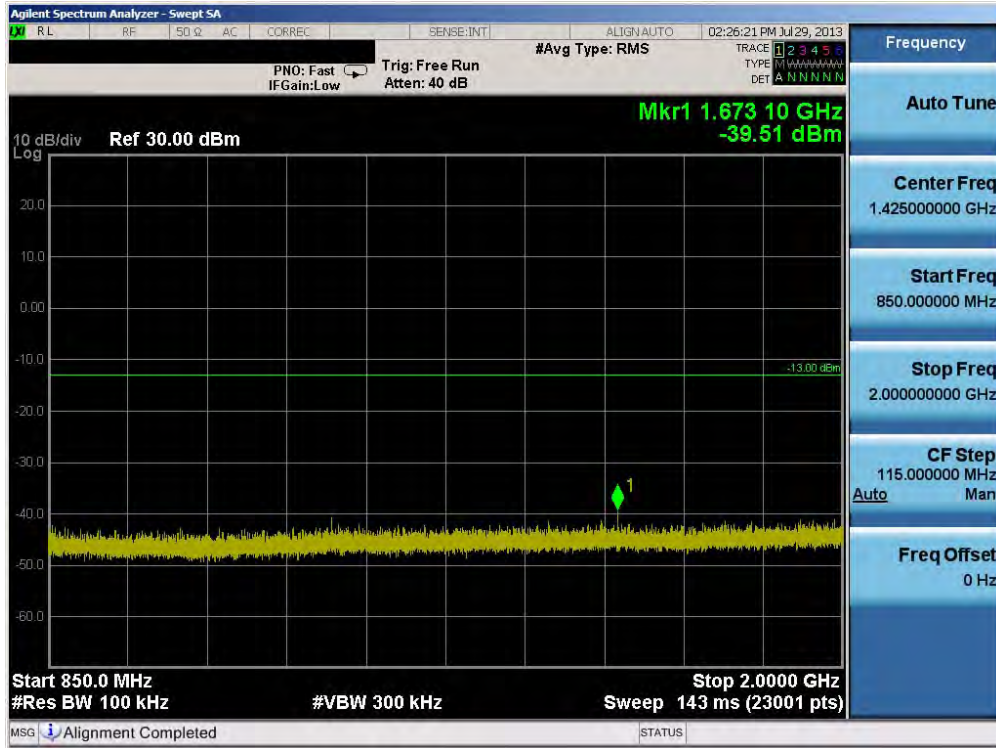


Plot 6-13. Conducted Spurious Plot (Cellular GSM Mode – Ch. 190)

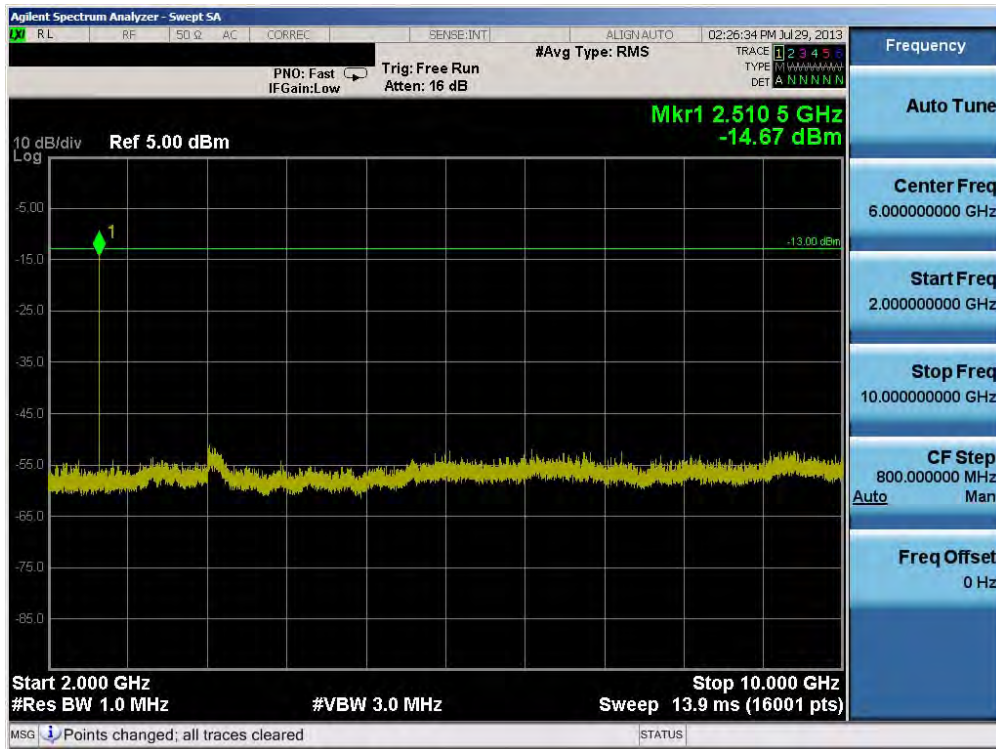


Plot 6-14. Conducted Spurious Plot (Cellular GSM Mode – Ch. 190)

FCC ID: A3LSMN9002	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 21 of 89



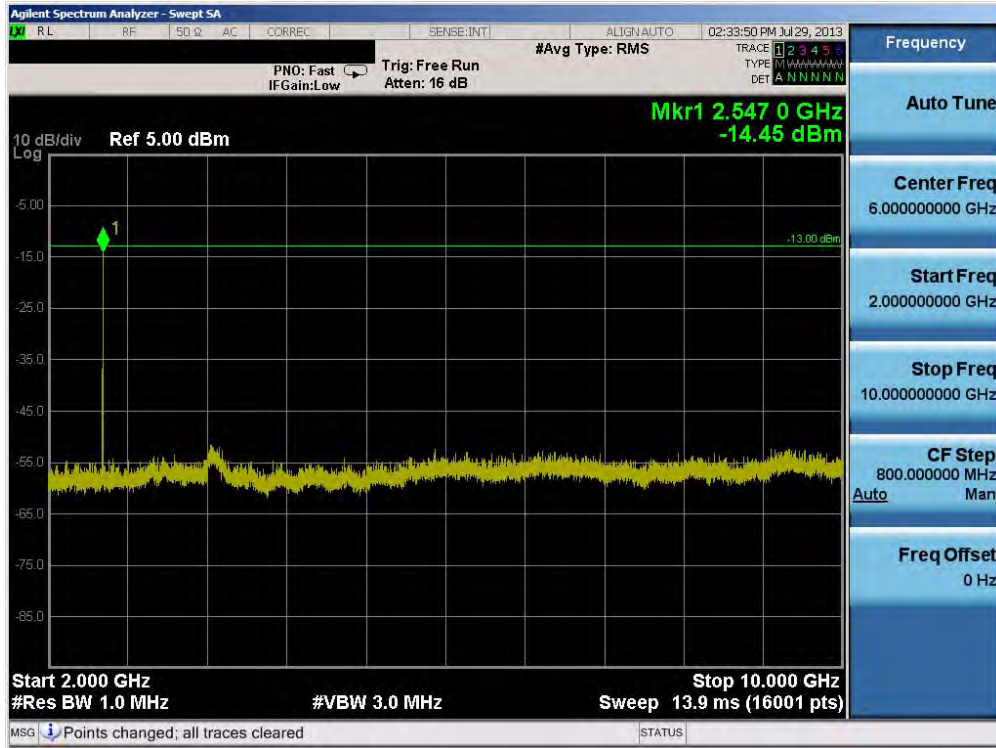


Plot 6-17. Conducted Spurious Plot (Cellular GSM Mode – Ch. 251)

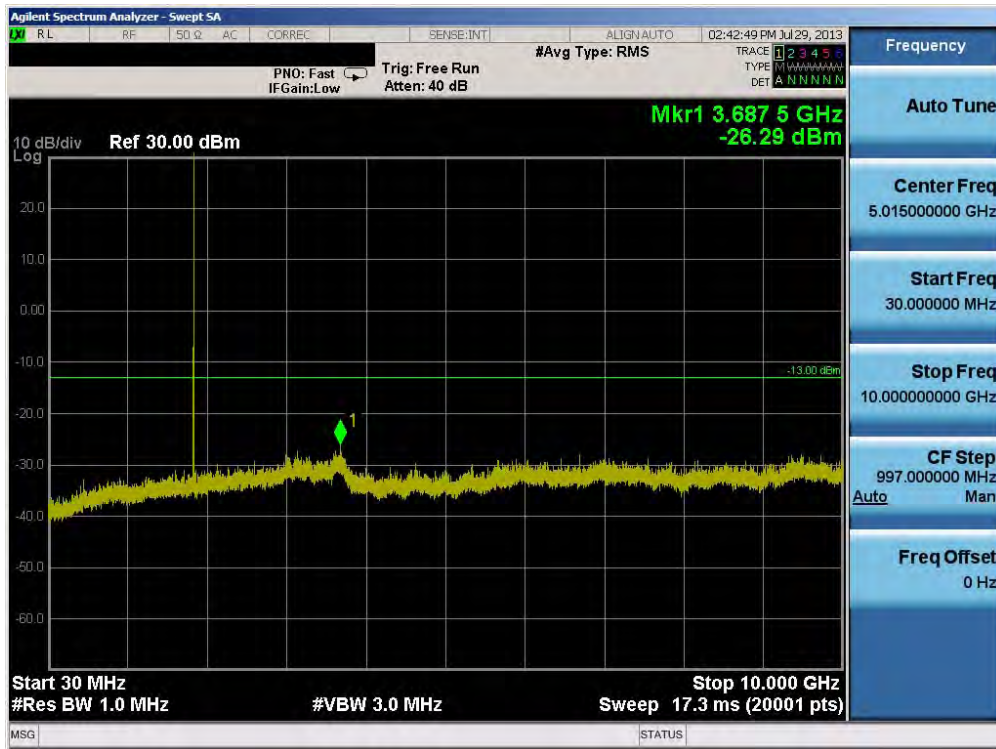


Plot 6-18. Conducted Spurious Plot (PCS GSM Mode – Ch. 512)

FCC ID: A3LSMN9002	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 23 of 89

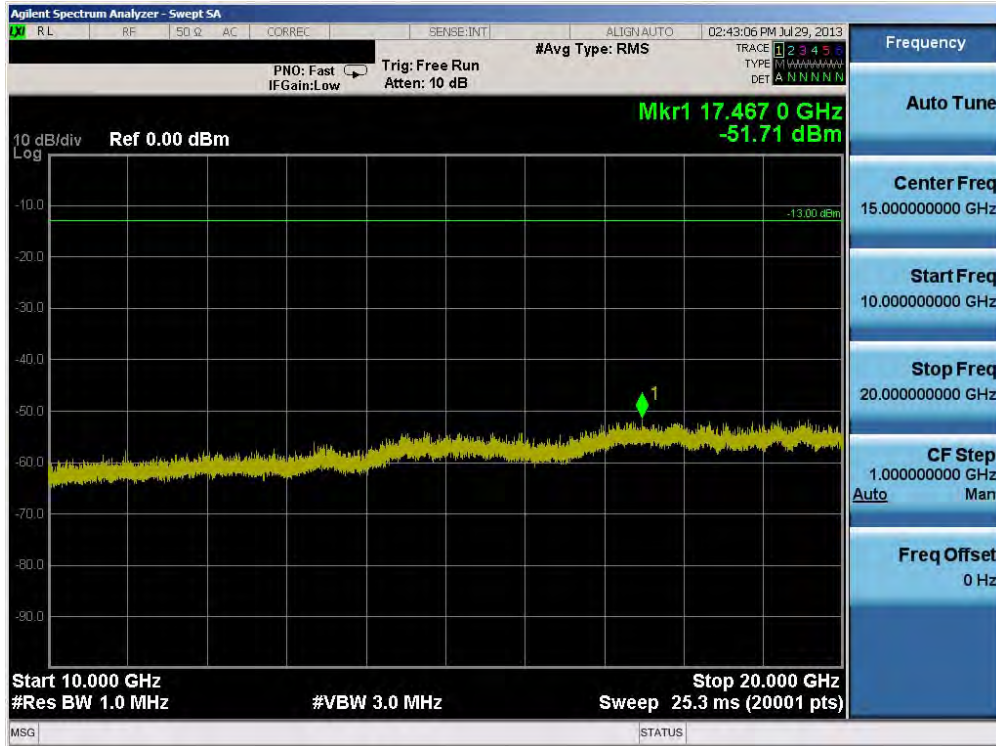


Plot 6-19. Conducted Spurious Plot (PCS GSM Mode – Ch. 512)

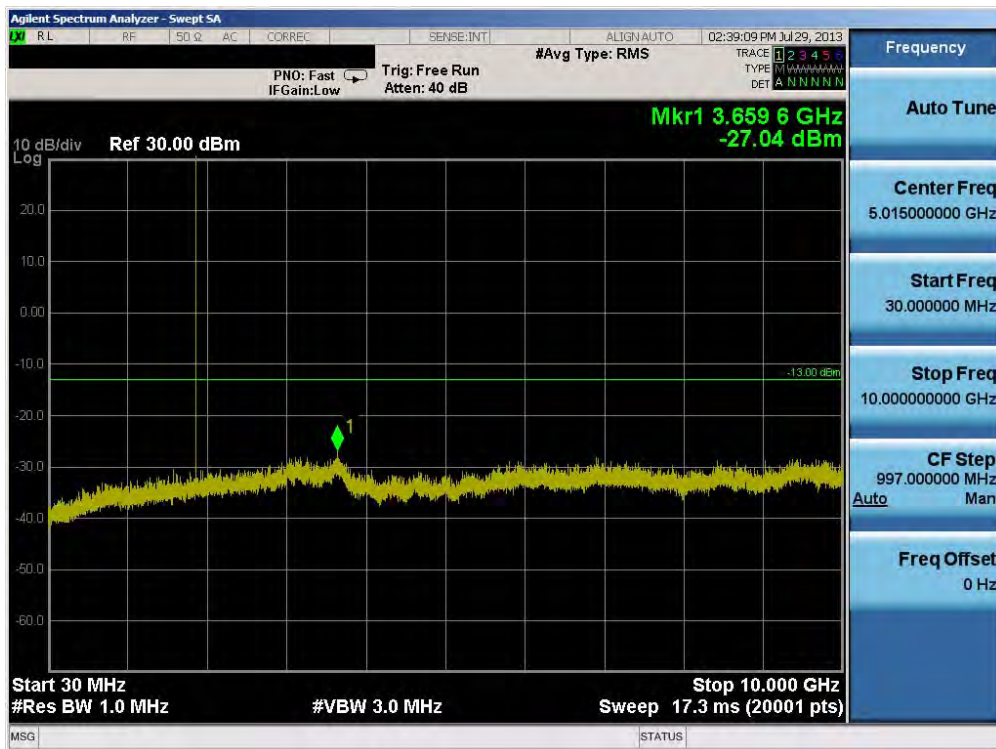


Plot 6-20. Conducted Spurious Plot (PCS GSM Mode – Ch. 661)

FCC ID: A3LSMN9002	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 24 of 89

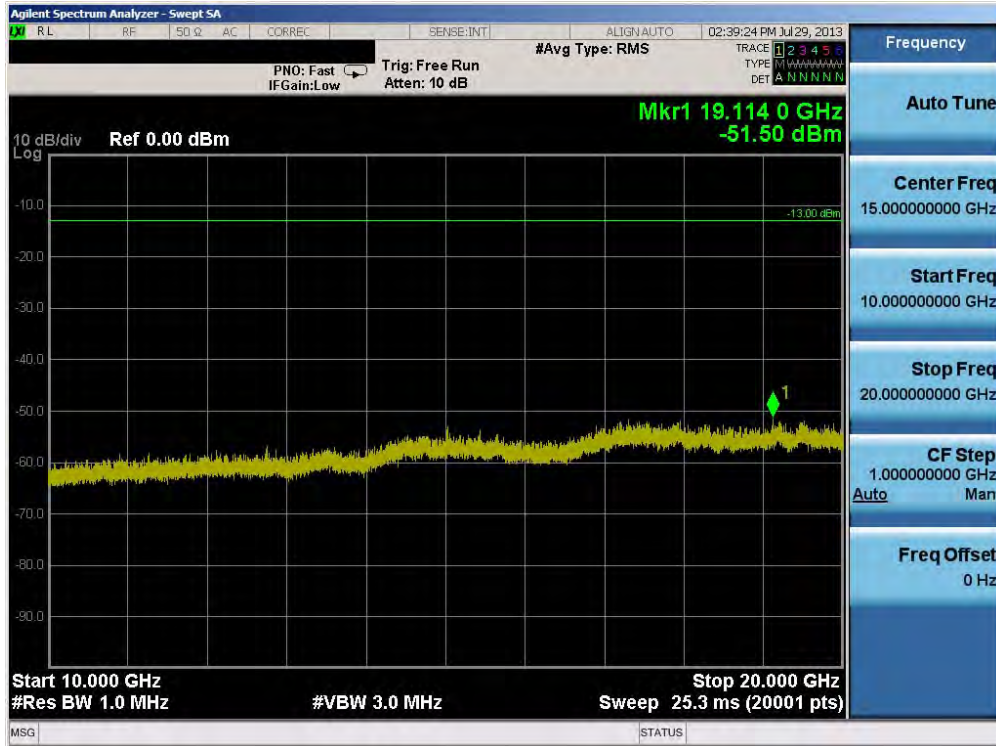


Plot 6-21. Conducted Spurious Plot (PCS GSM Mode – Ch. 661)

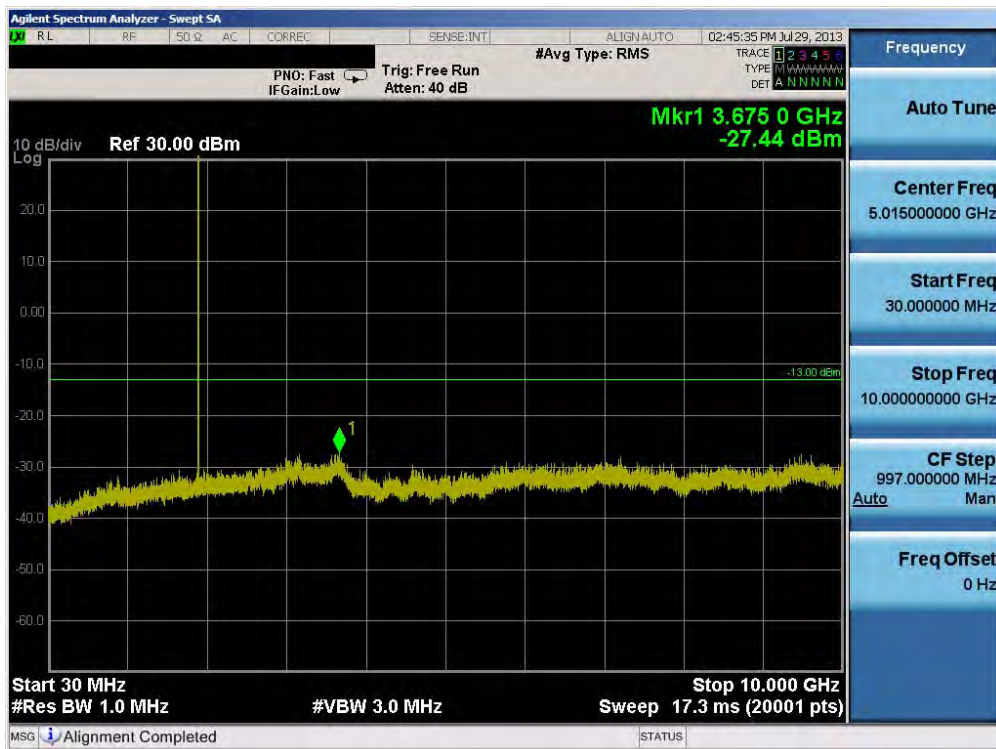


Plot 6-22. Conducted Spurious Plot (PCS GSM Mode – Ch. 810)

FCC ID: A3LSMN9002	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 25 of 89



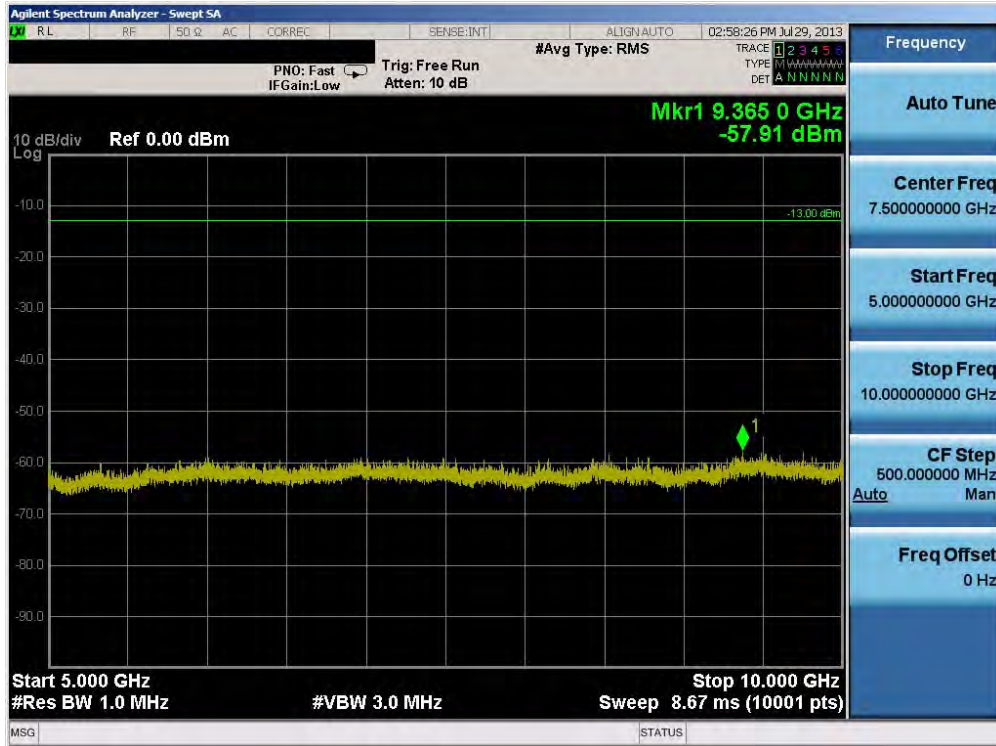


Plot 6-25. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4132)

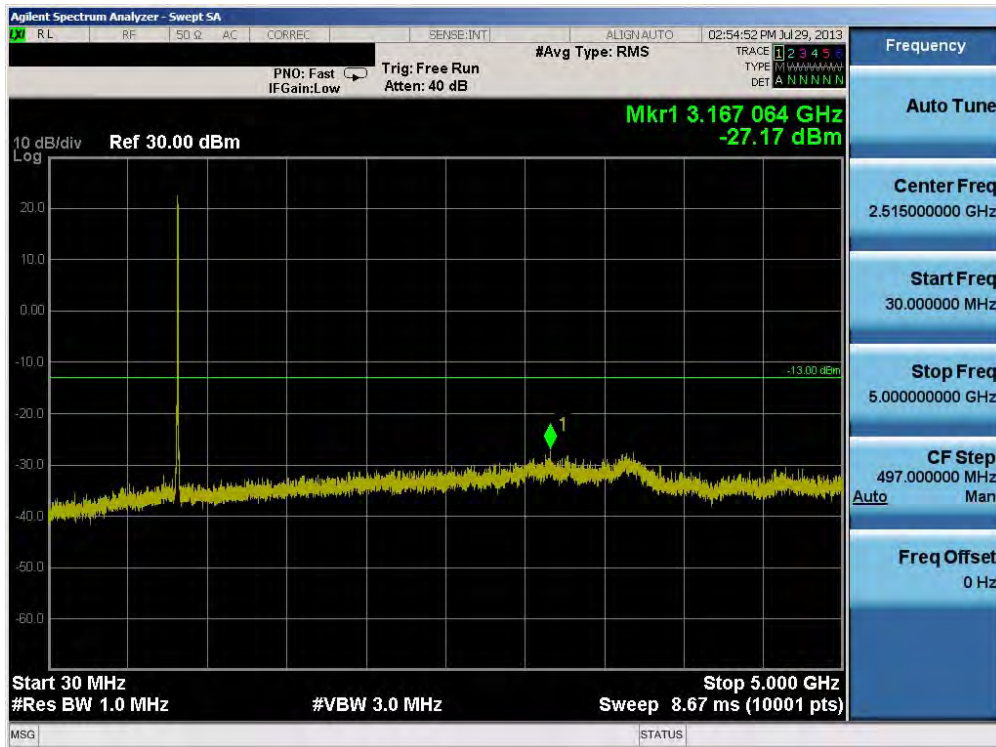


Plot 6-26. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4183)

FCC ID: A3LSMN9002	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 27 of 89

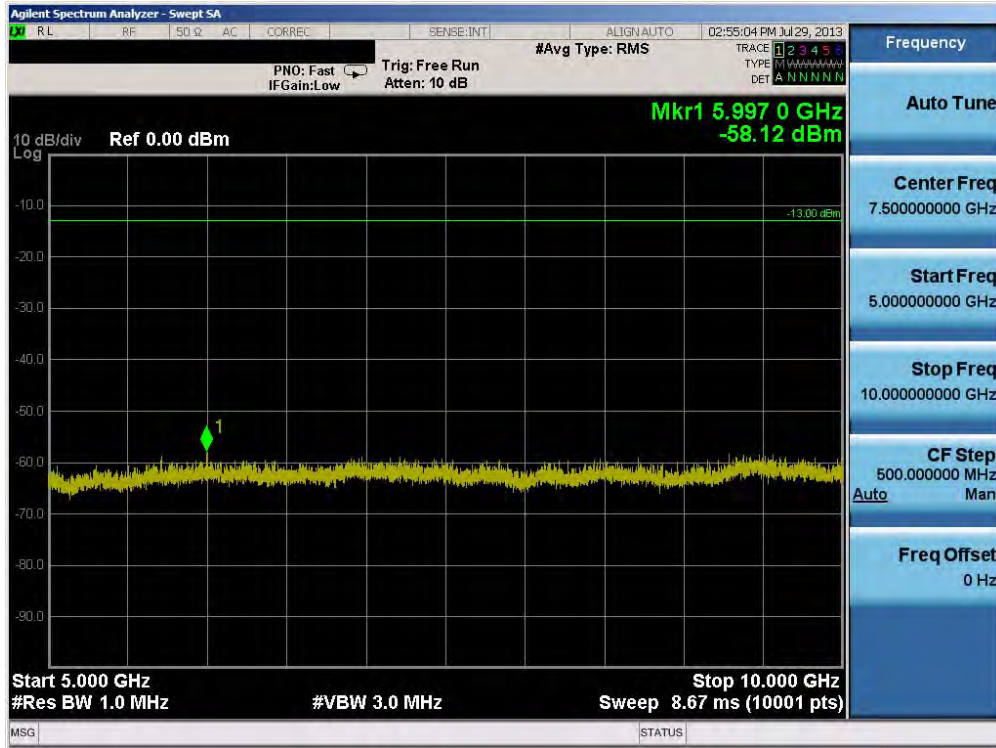


Plot 6-27. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4183)

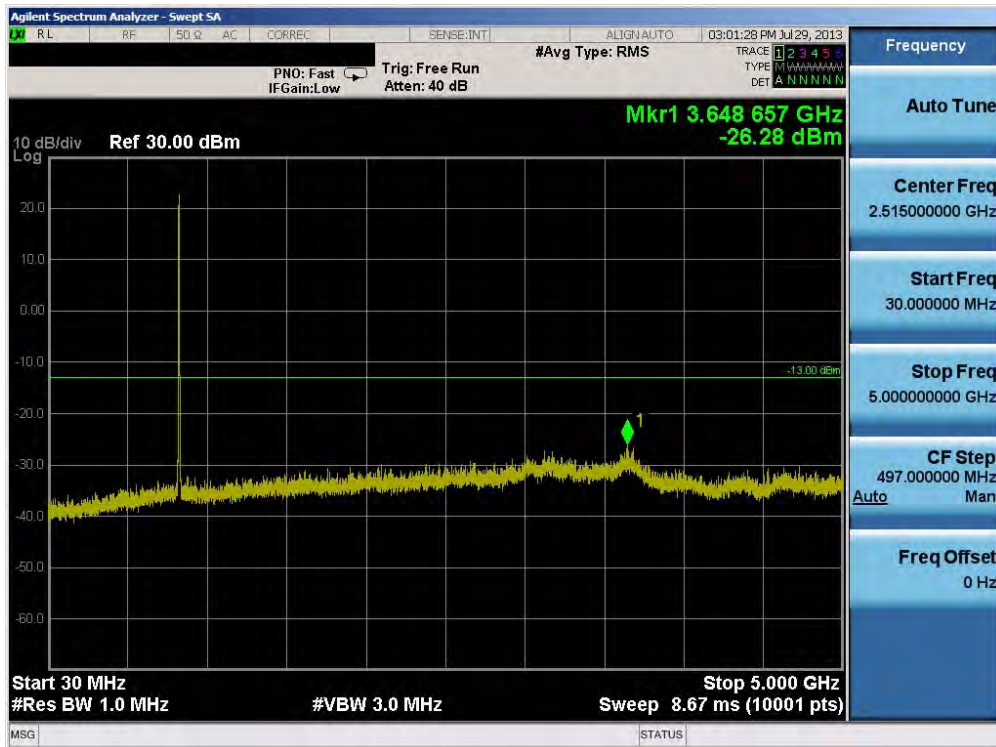


Plot 6-28. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4233)

FCC ID: A3LSMN9002	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 28 of 89

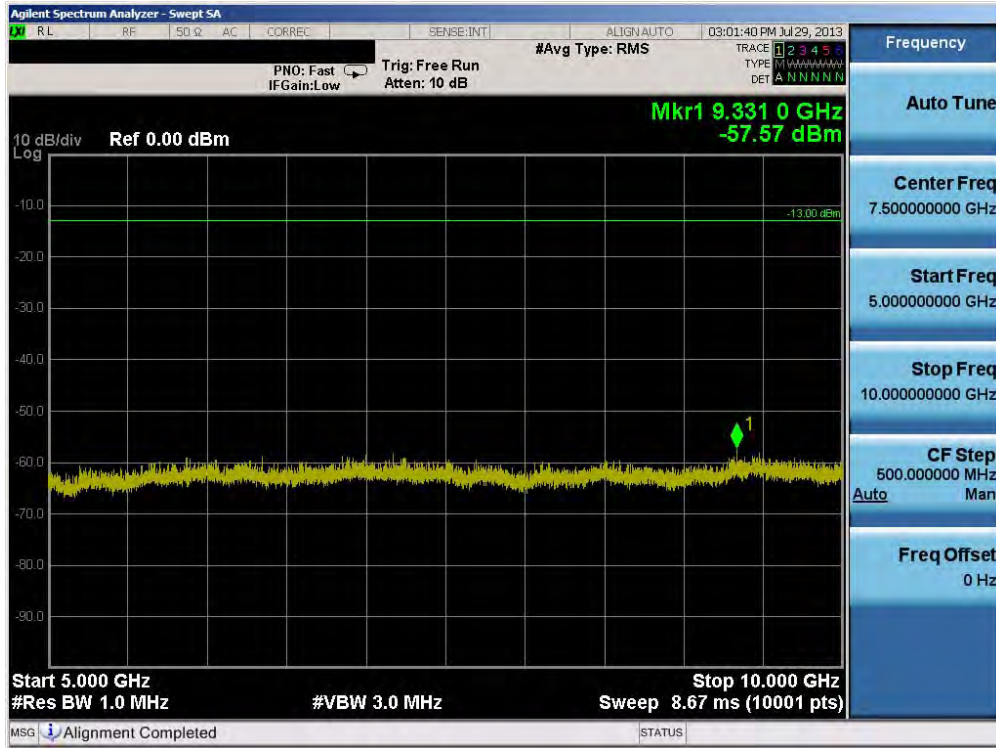


Plot 6-29. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4233)

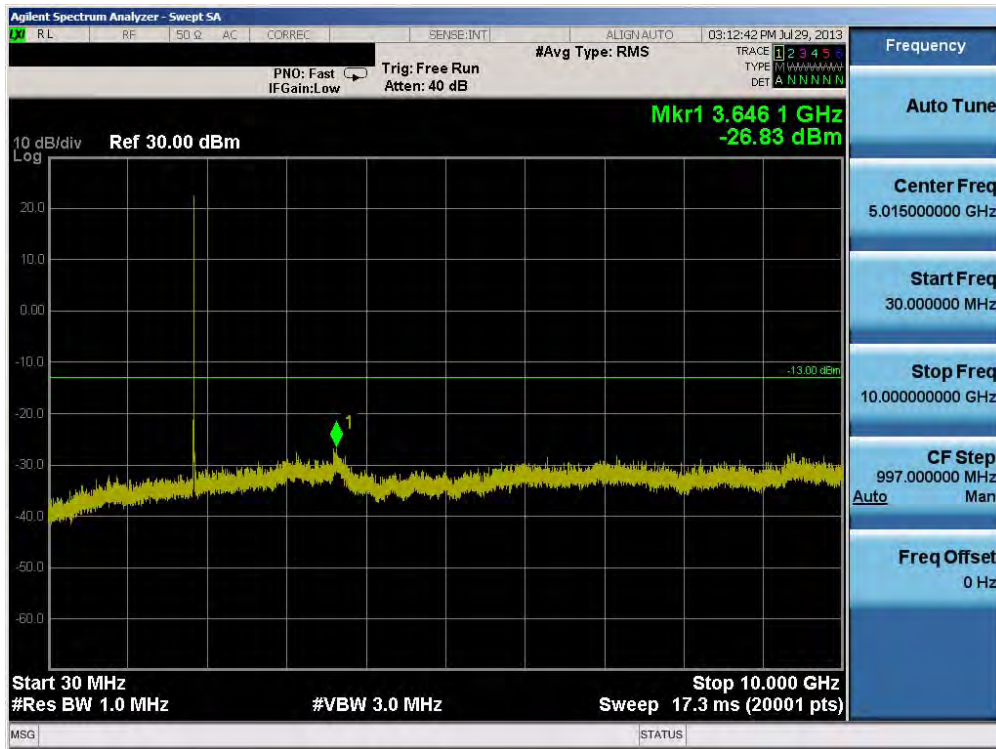


Plot 6-30. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9262)

FCC ID: A3LSMN9002	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 29 of 89

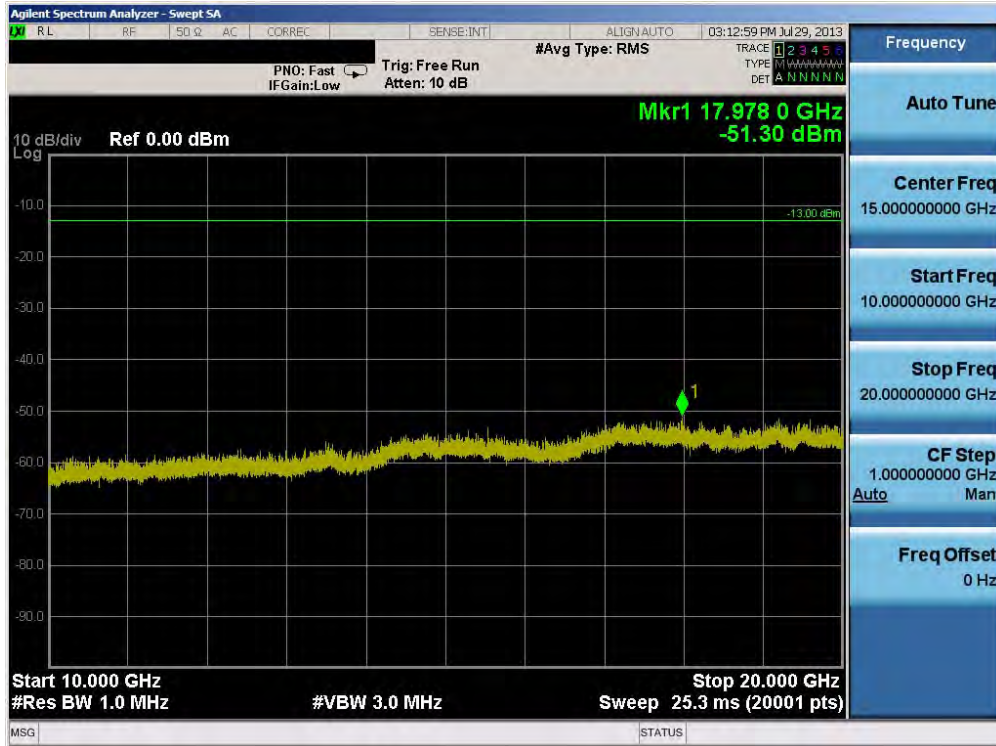

Plot 6-31. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9262)

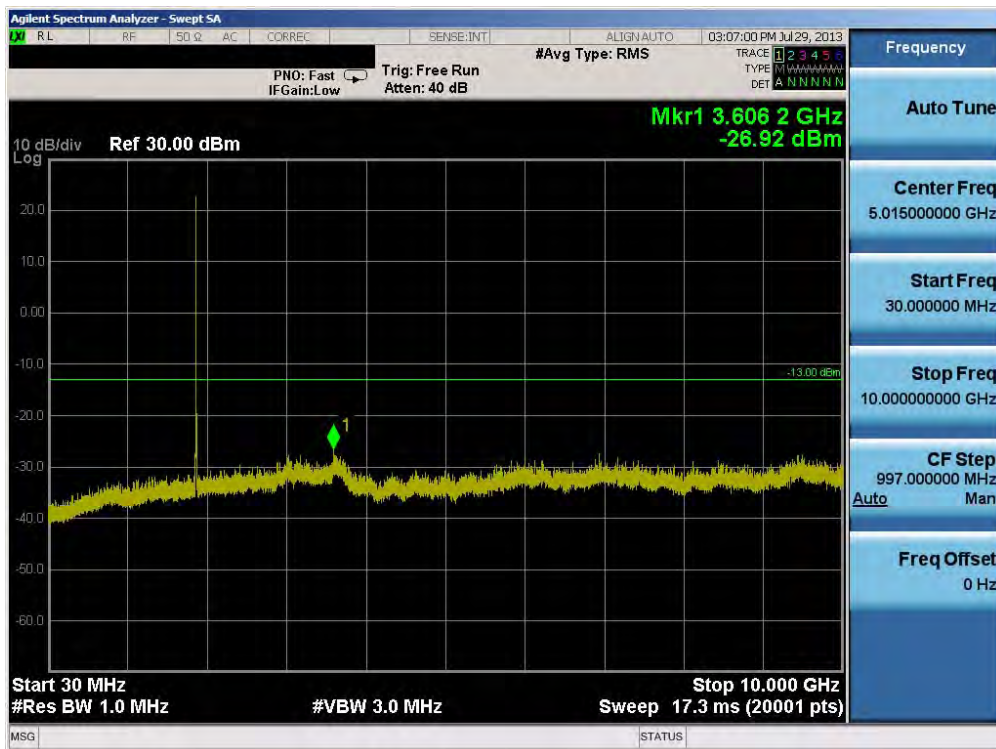

Plot 6-32. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9400)

FCC ID: A3LSMN9002	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 30 of 89





**Plot 6-35. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9538)**

<b>FCC ID:</b> A3LSMN9002		<b>FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1307251428.A3L	<b>Test Dates:</b> July 28 -Aug 15, 2013	<b>EUT Type:</b> Portable Handset	Page 32 of 89	

## 6.5 Spurious and Harmonic Emissions at Antenna Terminal (Sub. Ant.)

§2.1051 §22.917(a) §24.238(a) RSS-132(4.5.1) RSS-133(6.5.1)

### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P_{[Watts]})$ , where P is the transmitter power in Watts.***

### Test Procedure Used


KDB 971168 v02 – Section 6.0

### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into at least two plots per channel)
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = RMS
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

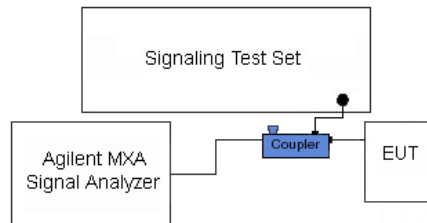


**Figure 6-4. Test Instrument & Measurement Setup**

### Test Notes


Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for Part 22 and 1 MHz or greater for Part 24. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 33 of 89



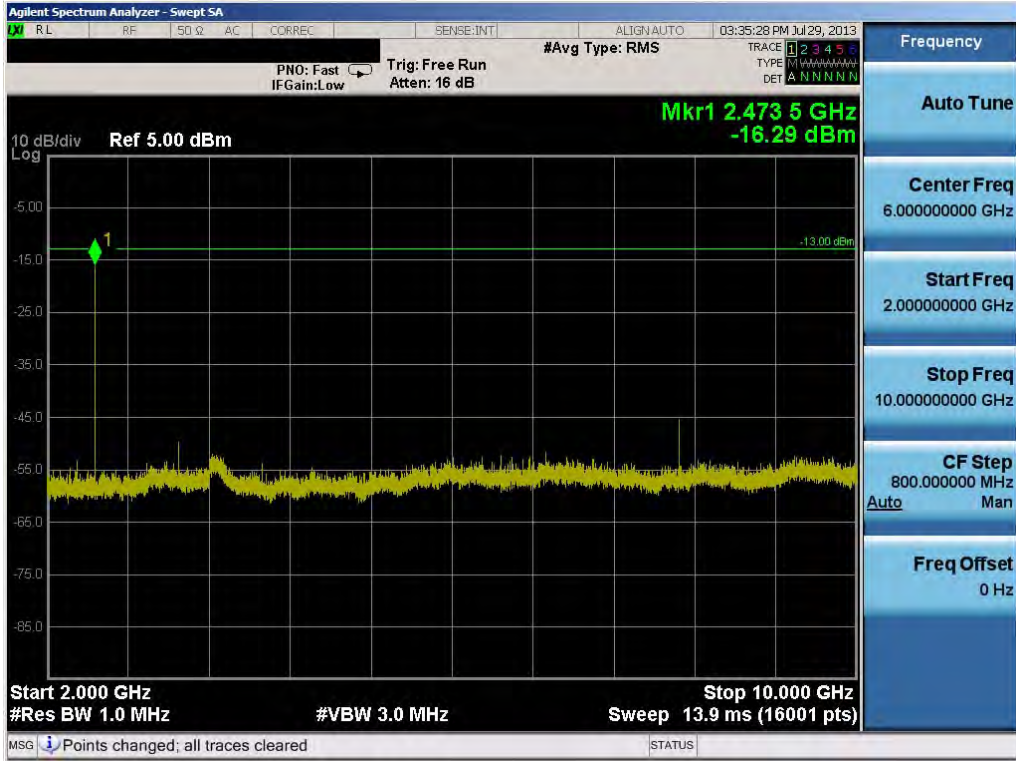


Plot 6-38. Conducted Spurious Plot (Cellular GSM Mode – Ch. 128)

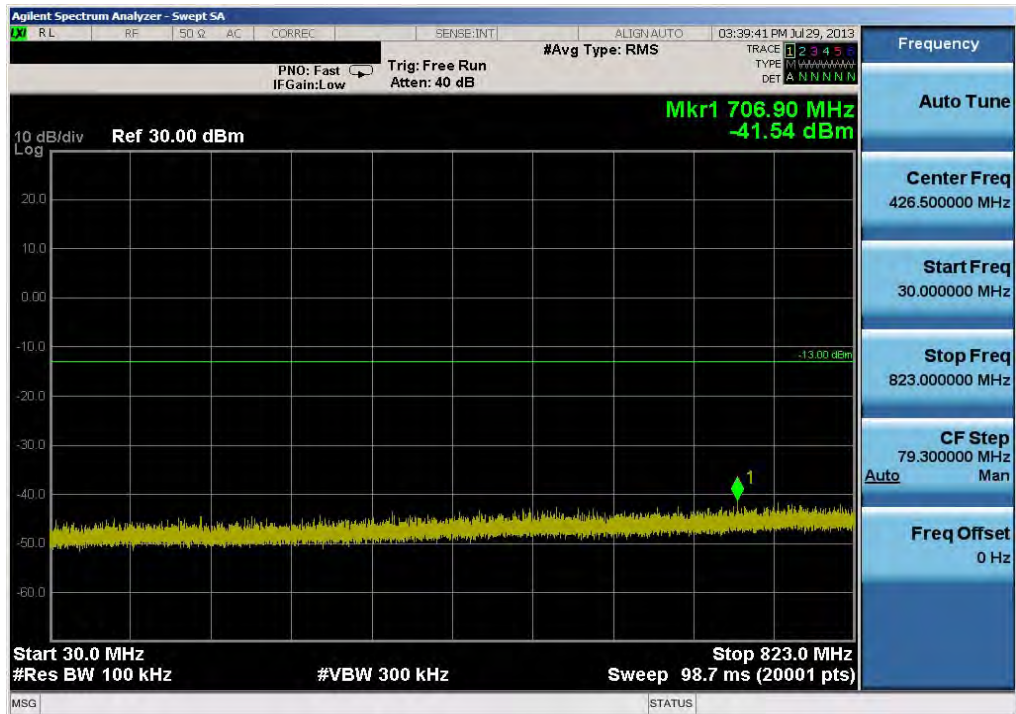


Plot 6-39. Conducted Spurious Plot (Cellular GSM Mode – Ch. 190)

FCC ID: A3LSMN9002	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 35 of 89

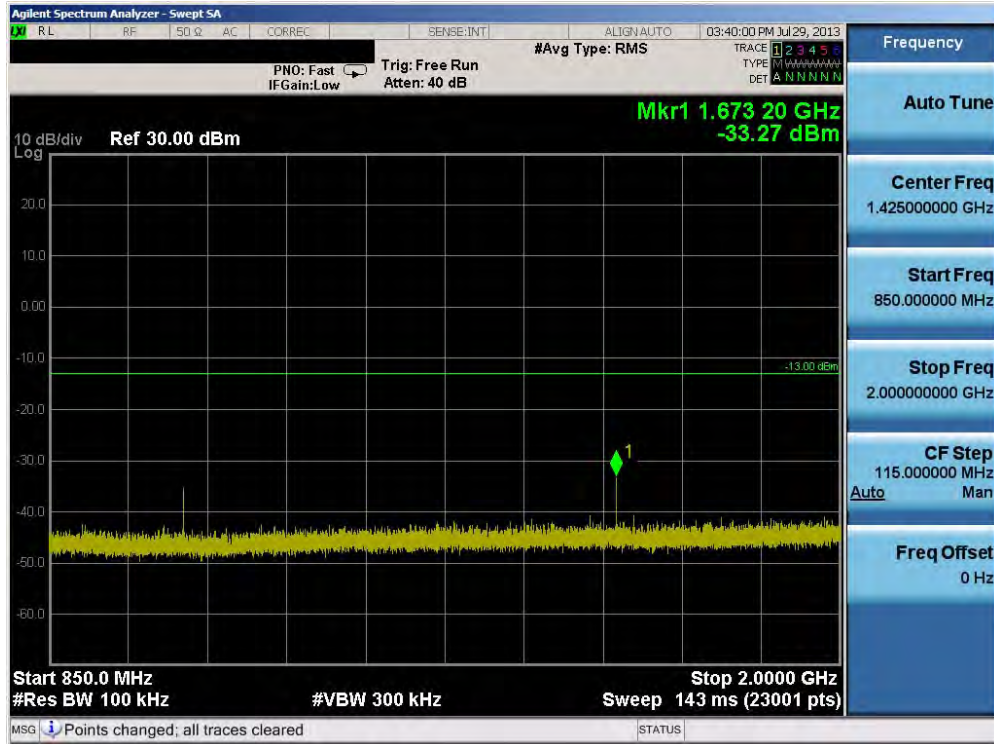

Plot 6-40. Conducted Spurious Plot (Cellular GSM Mode – Ch. 190)

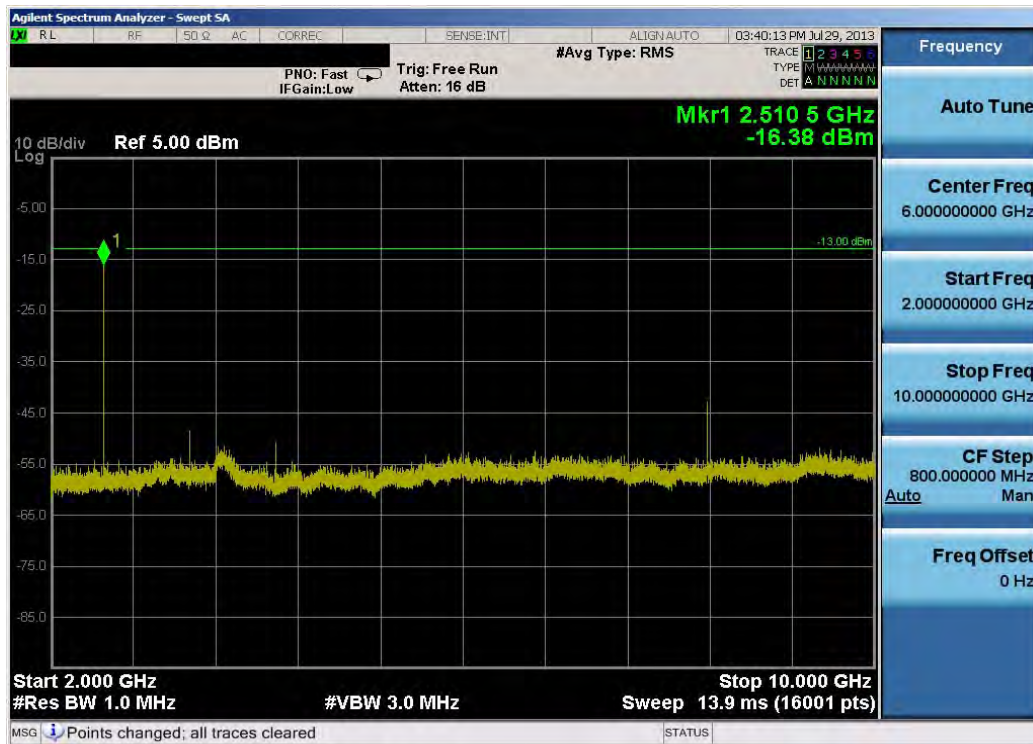


Plot 6-41. Conducted Spurious Plot (Cellular GSM Mode – Ch. 190)


FCC ID: A3LSMN9002	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 36 of 89





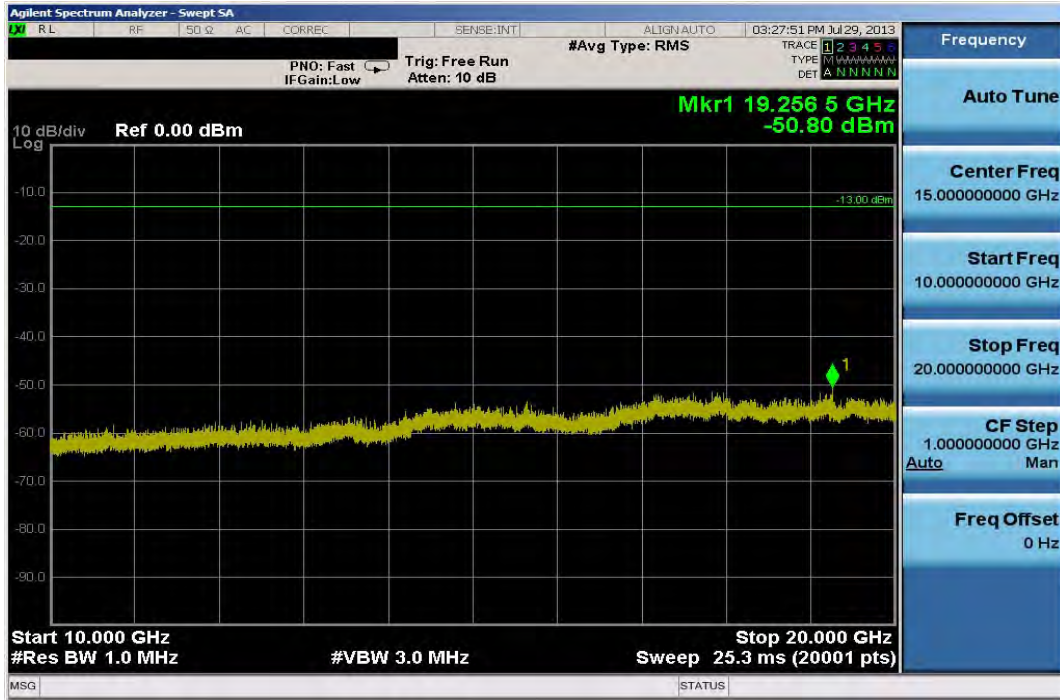


Plot 6-46. Conducted Spurious Plot (PCS GSM Mode – Ch. 512)

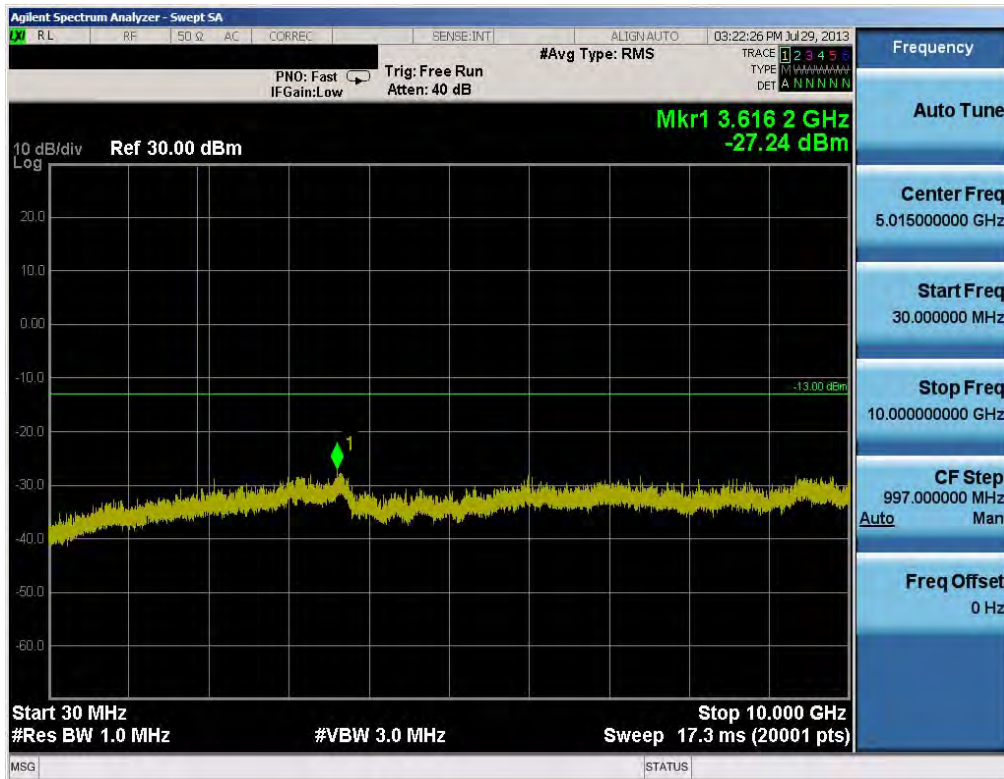


Plot 6-47. Conducted Spurious Plot (PCS GSM Mode – Ch. 661)

FCC ID: A3LSMN9002	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 39 of 89

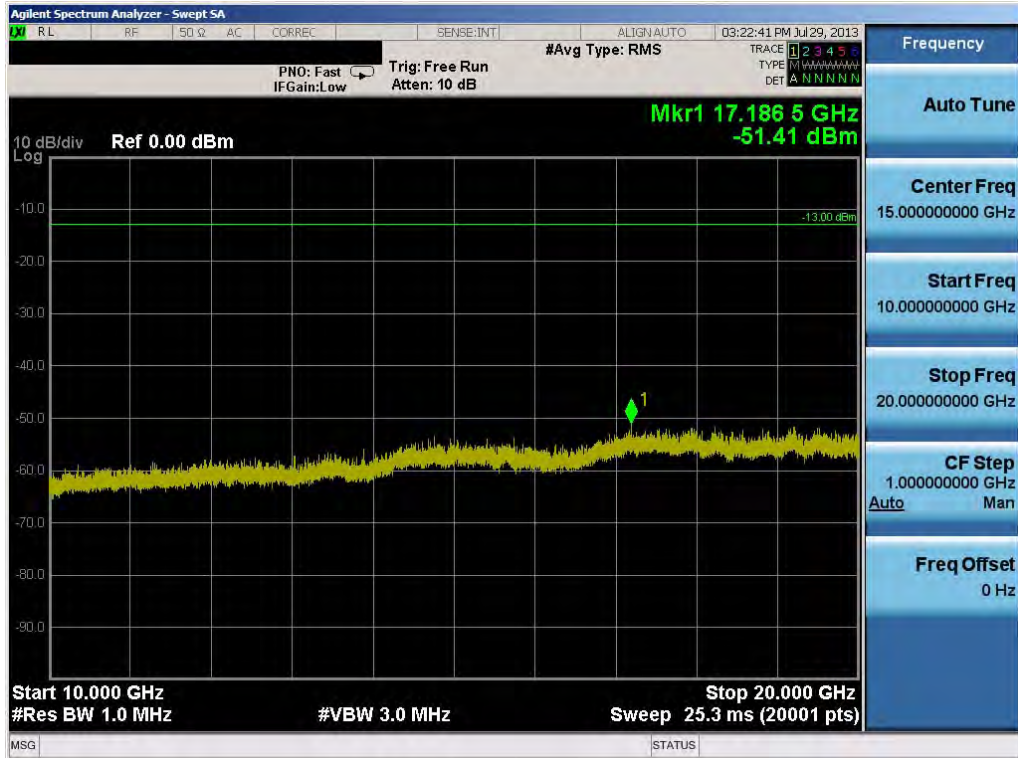


Plot 6-48. Conducted Spurious Plot (PCS GSM Mode – Ch. 661)

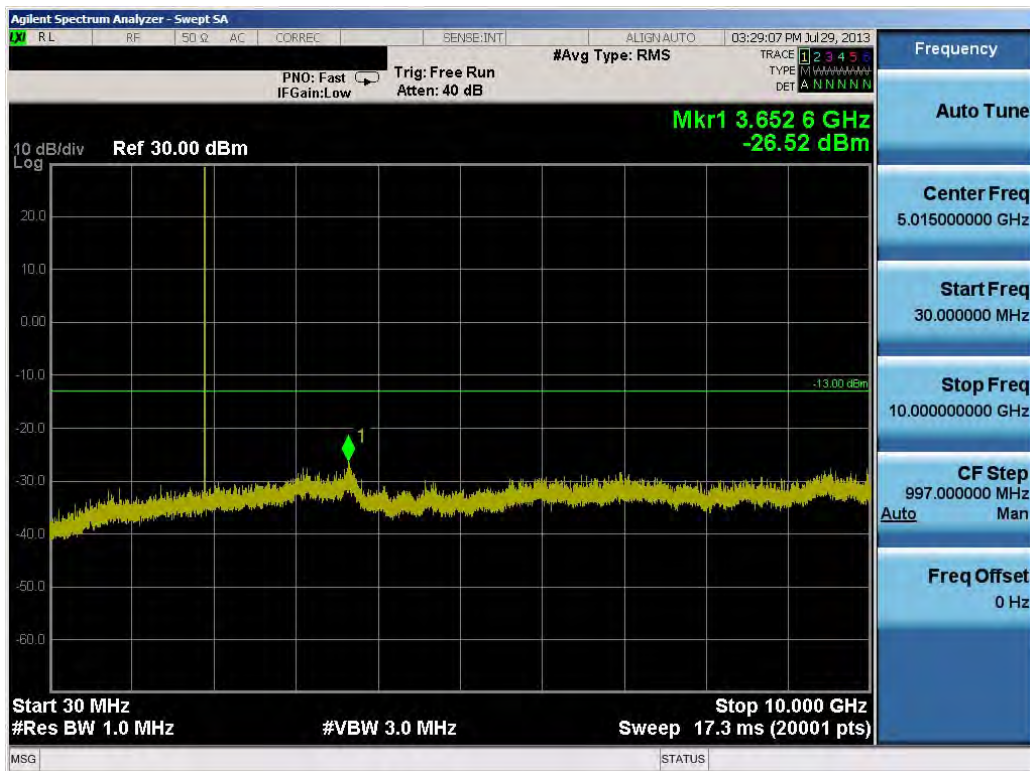



Plot 6-49. Conducted Spurious Plot (PCS GSM Mode – Ch. 810)

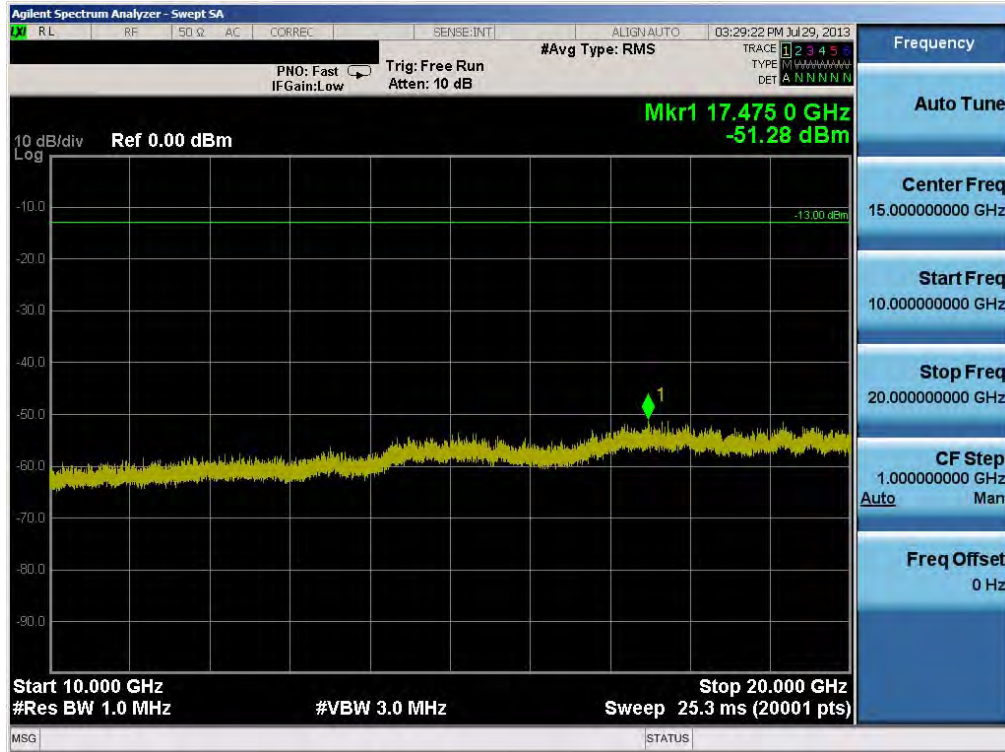FCC ID: A3LSMN9002	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 40 of 89



**Plot 6-50. Conducted Spurious Plot (PCS GSM Mode – Ch. 810)**

<b>FCC ID:</b> A3LSMN9002		<b>FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1307251428.A3L	<b>Test Dates:</b> July 28 -Aug 15, 2013	<b>EUT Type:</b> Portable Handset	Page 41 of 89	

## 6.6 Band Edge Emissions at Antenna Terminal (Main Ant.)

§2.1051 §22.917(a) §24.238(a) §27.53(h) RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)

### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P_{[Watts]})$ , where  $P$  is the transmitter power in Watts.***

### Test Procedure Used


KDB 971168 v02 – Section 6.0

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW  $\geq$  1% of the emission bandwidth
4. VBW  $\geq$  3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq$  2 x Span/RBW
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

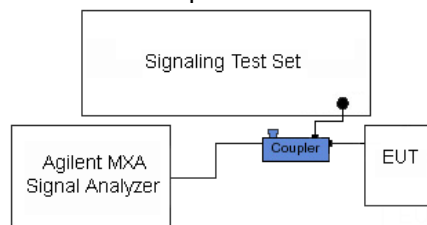


**Figure 6-5. Test Instrument & Measurement Setup**


### Test Notes

Per 22.917(b), 24.238(b), and 27.53(h)(3), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit.

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 42 of 89

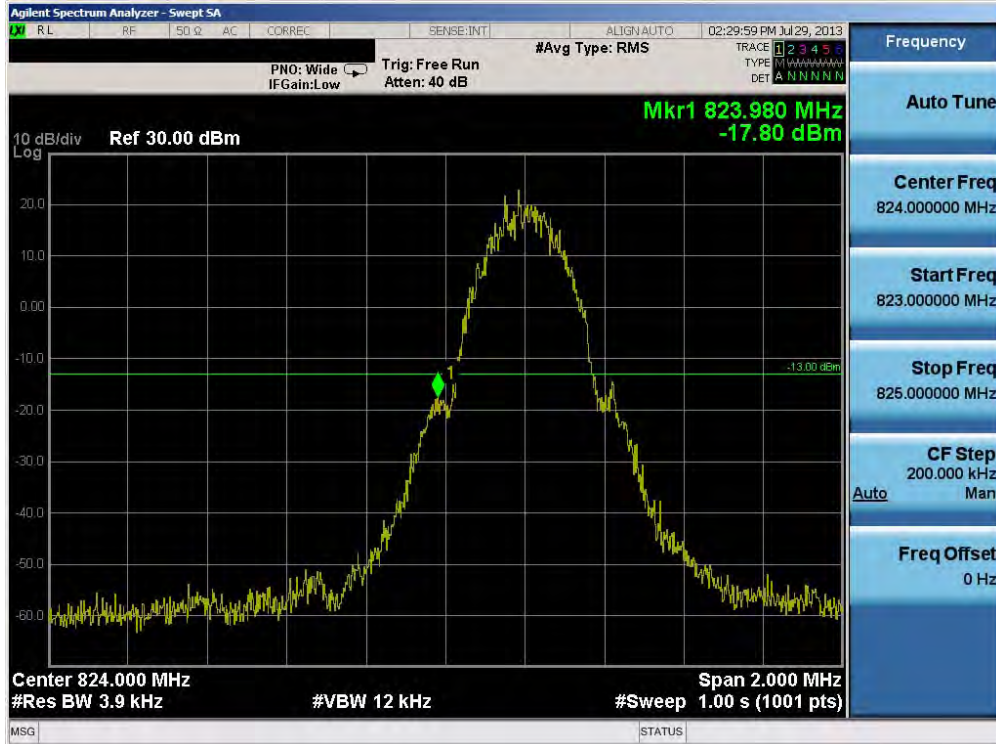


Plot 6-51. Band Edge Plot (Cellular GSM Mode – Ch. 128)

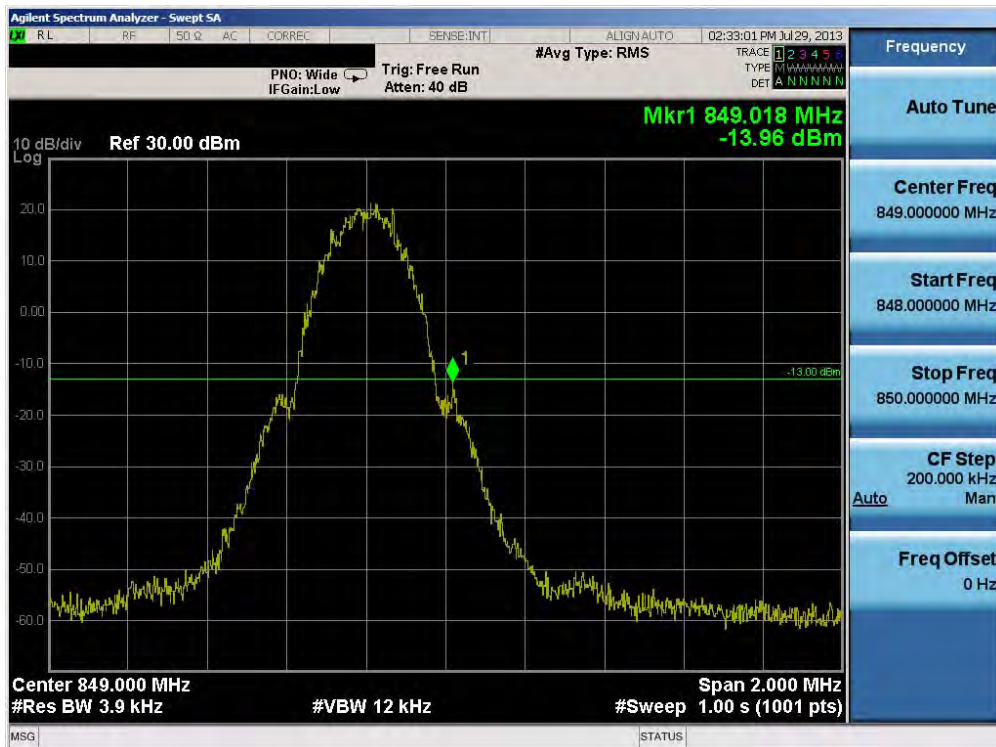


Plot 6-52. Band Edge Plot (Cellular GSM Mode – Ch. 251)

FCC ID: A3LSMN9002	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 43 of 89

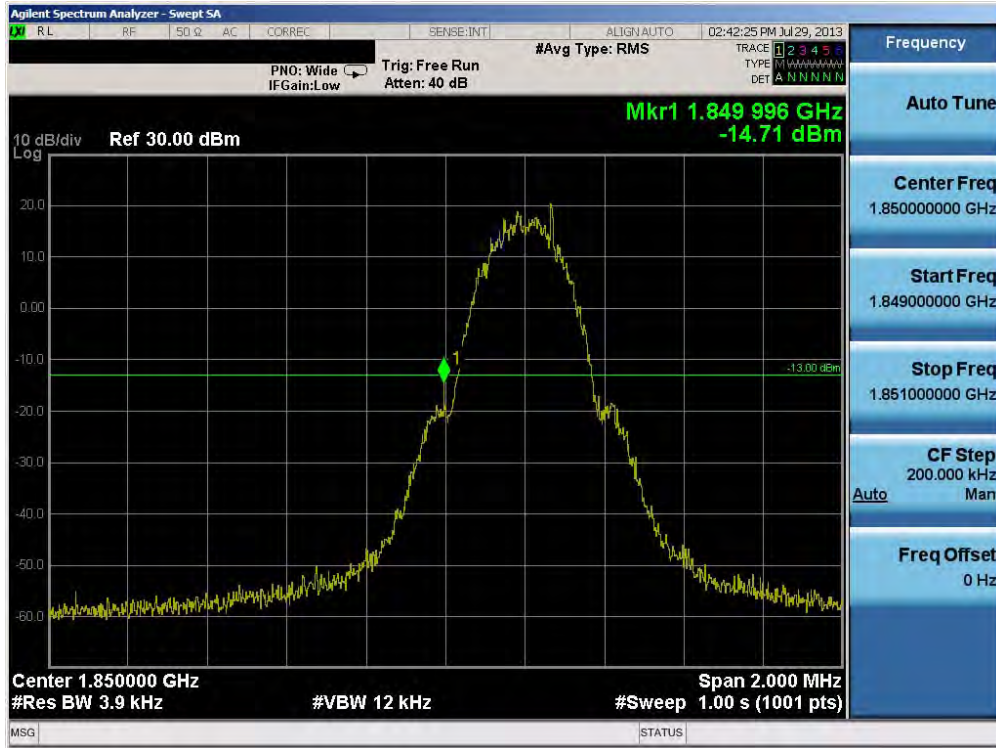

Plot 6-53. Band Edge Plot (PCS GSM Mode – Ch. 512)

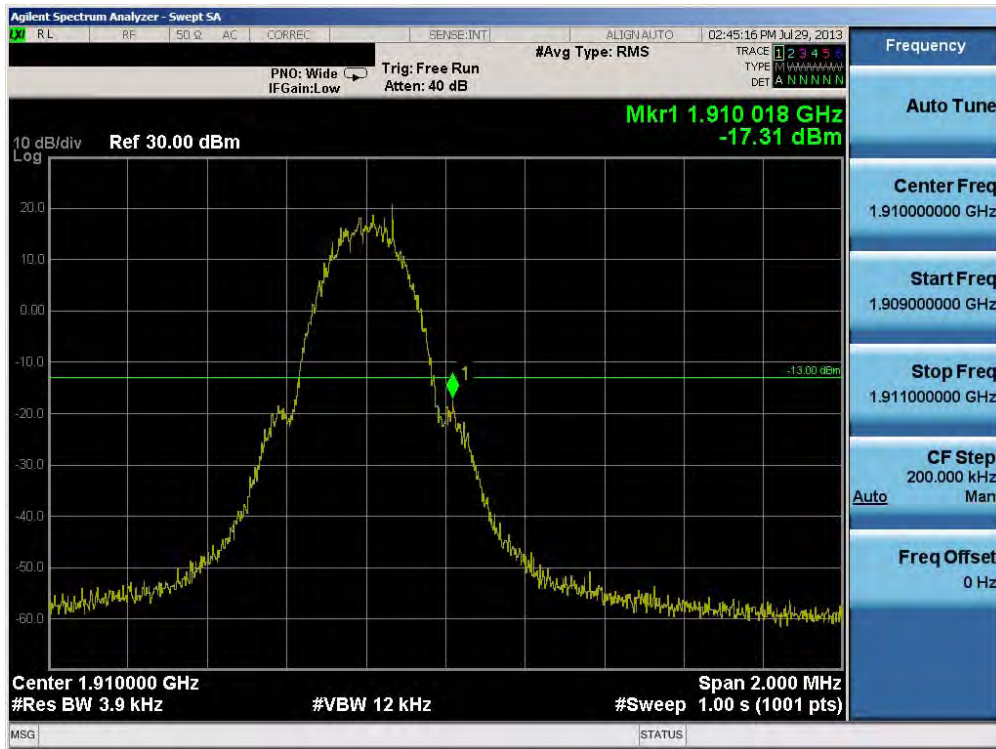

Plot 6-54. Band Edge Plot (PCS GSM Mode – Ch. 810)

FCC ID: A3LSMN9002	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 44 of 89



Plot 6-55. Band Edge Plot (Cellular WCDMA Mode – Ch. 4132)




Plot 6-56. Band Edge Plot (Cellular WCDMA Mode – Ch. 4233)



FCC ID: A3LSMN9002	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 45 of 89

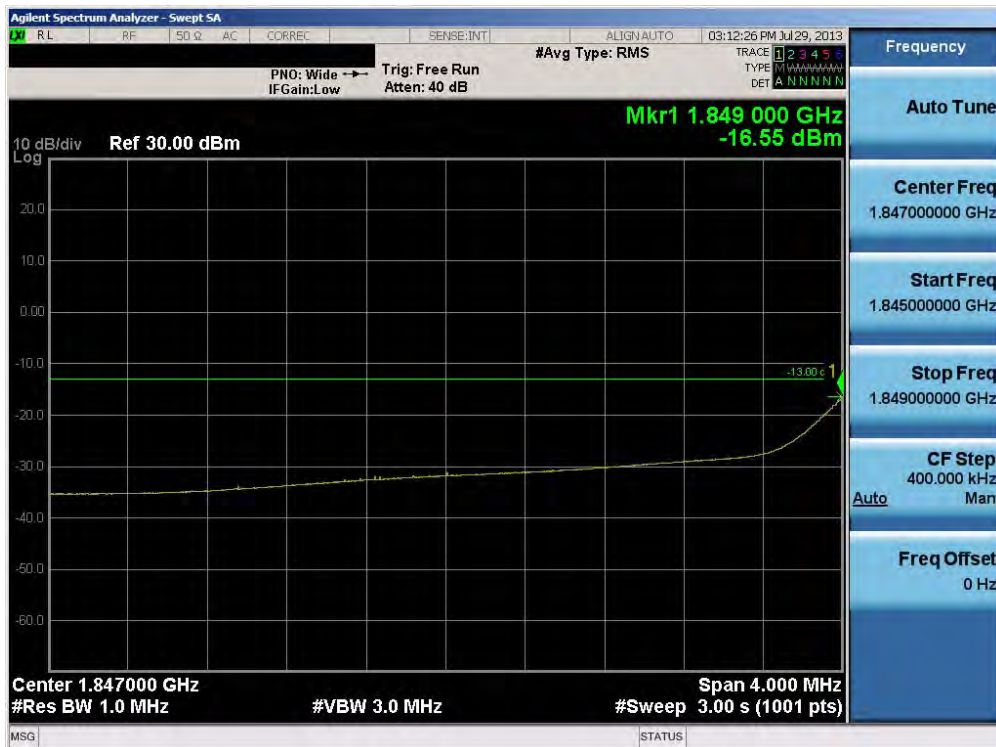


**Plot 6-57. Band Edge Plot (PCS WCDMA Mode – Ch. 9262)**



**Plot 6-58. 4MHz Span Plot (PCS WCDMA Mode – Ch. 9262)**

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 46 of 89

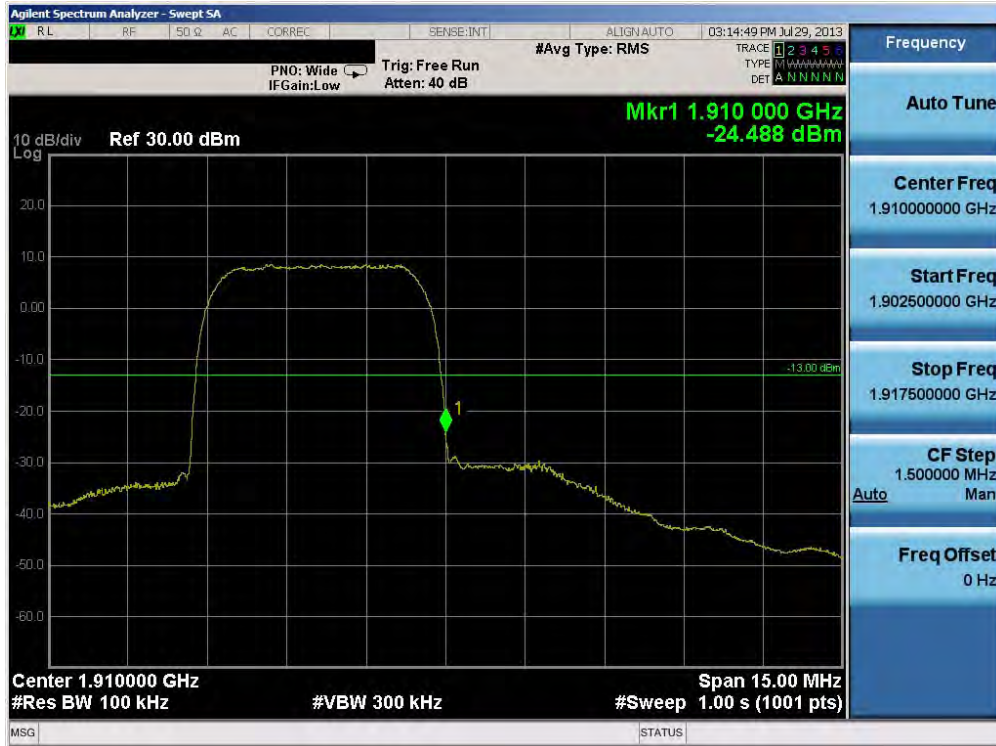

Plot 6-59. Band Edge Plot (PCS WCDMA Mode – Ch. 9538)



Plot 6-60. 4MHz Span Plot (PCS WCDMA Mode – Ch. 9538)

FCC ID: A3LSMN9002	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 47 of 89

**6.7 Band Edge Emissions at Antenna Terminal (Sub. Ant.)**  
§2.1051 §22.917(a) §24.238(a) §27.53(h) RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)

**Test Overview**

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

*The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P_{[Watts]})$ , where P is the transmitter power in Watts.*

**Test Procedure Used**


KDB 971168 v02 – Section 6.0

**Test Settings**

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW  $\geq$  1% of the emission bandwidth
4. VBW  $\geq$  3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq$  2 x Span/RBW
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

**Test Setup**

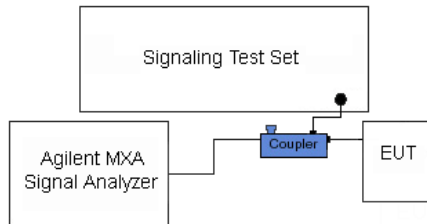

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 6-6. Test Instrument & Measurement Setup**


**Test Notes**

Per 22.917(b), 24.238(b), and 27.53(h)(3), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit.

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 48 of 89

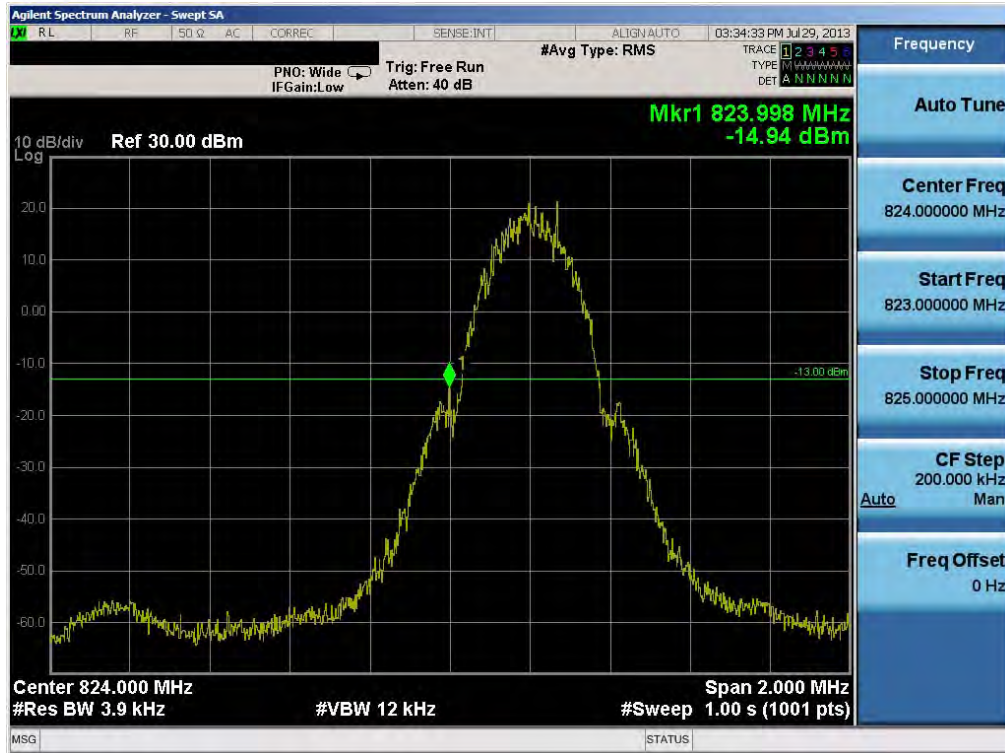


Plot 6-61. Band Edge Plot (Cellular GSM Mode – Ch. 128)

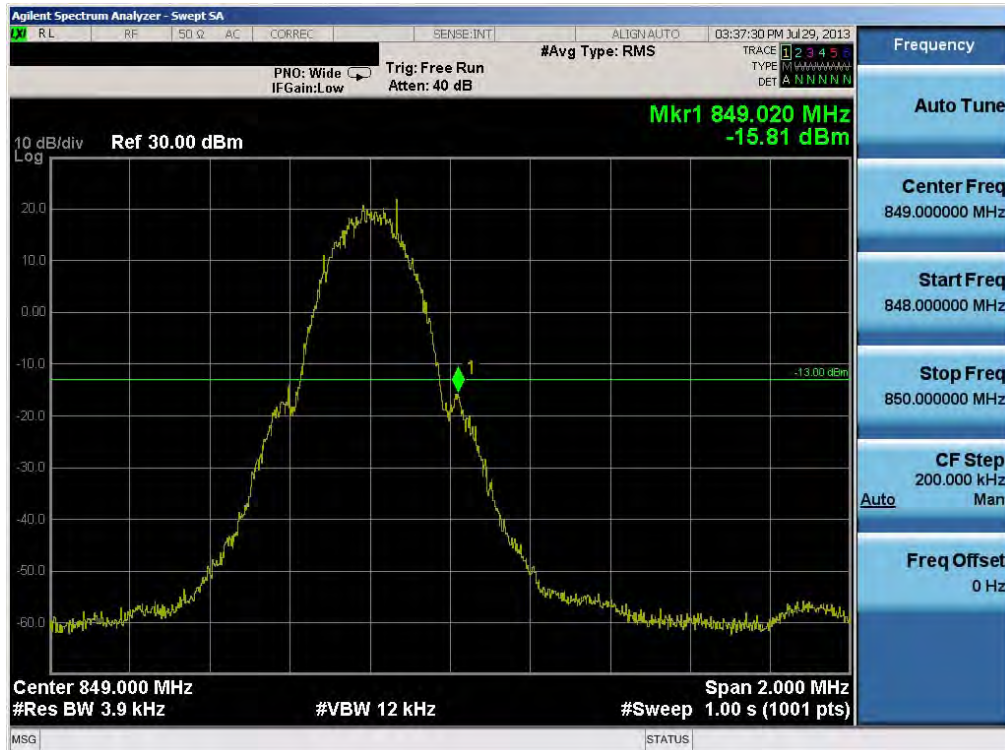


Plot 6-62. Band Edge Plot (Cellular GSM Mode – Ch. 251)

FCC ID: A3LSMN9002	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 49 of 89

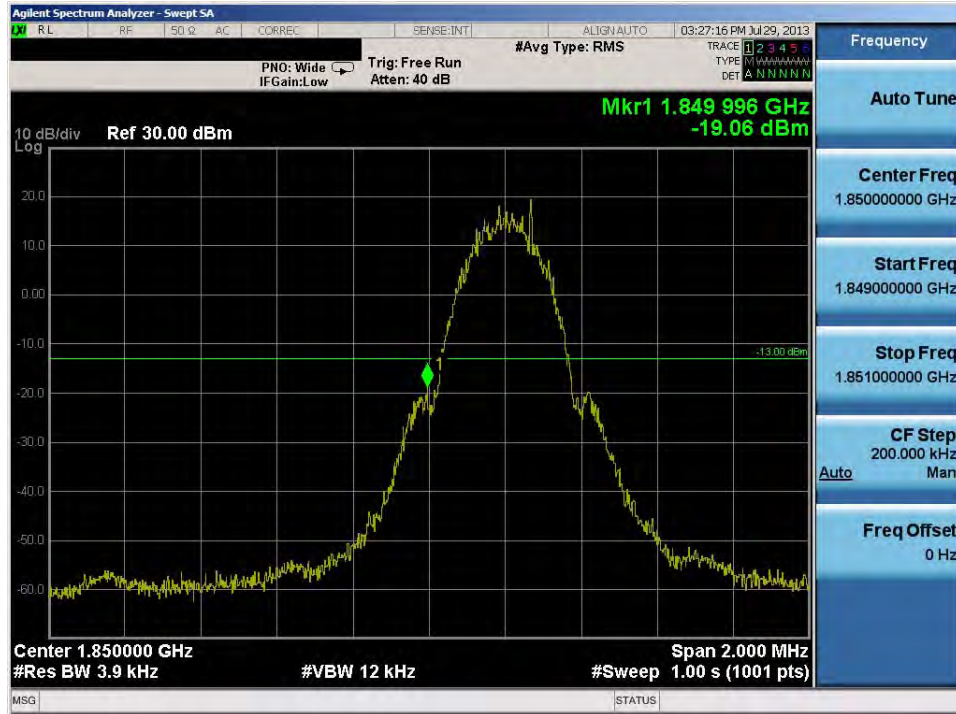

Plot 6-63. Band Edge Plot (PCS GSM Mode – Ch. 512)

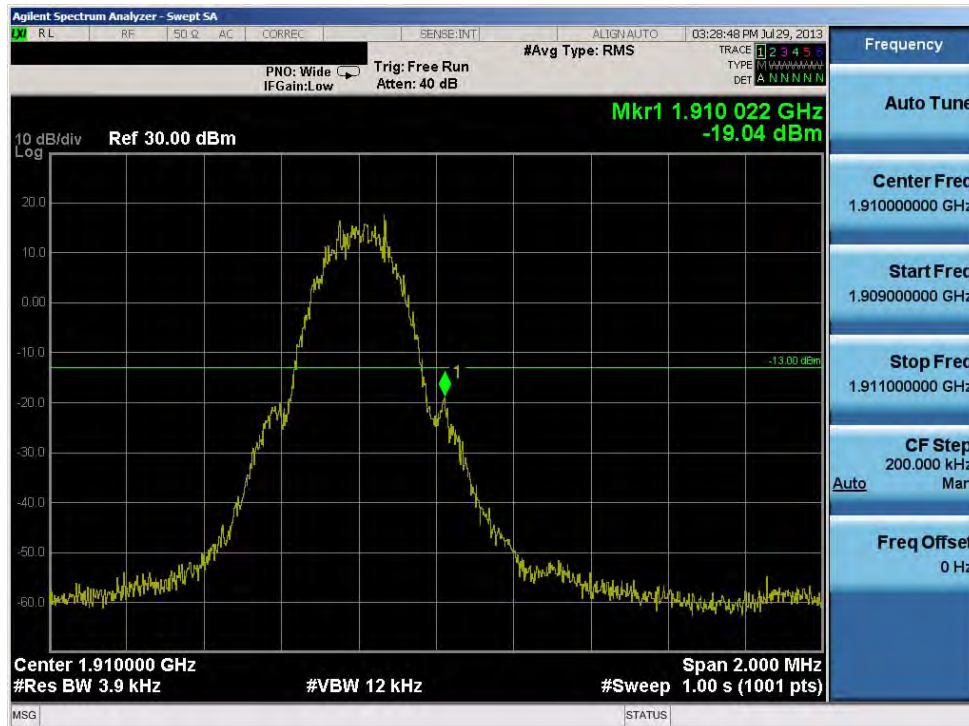

Plot 6-64. Band Edge Plot (PCS GSM Mode – Ch. 810)

FCC ID: A3LSMN9002	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 50 of 89

## 6.8 Peak-Average Ratio (Main Ant.)

§24.232(d) RSS-132(5.4) RSS-133(6.4)

### Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

### Test Procedure Used


KDB 971168 v02 – Section 5.7.1

### Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals, the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

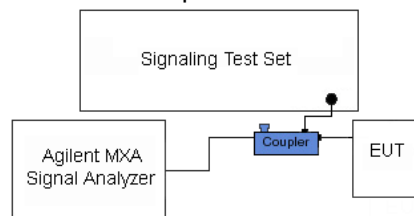


**Figure 6-7. Test Instrument & Measurement Setup**


### Test Notes

None.

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 51 of 89

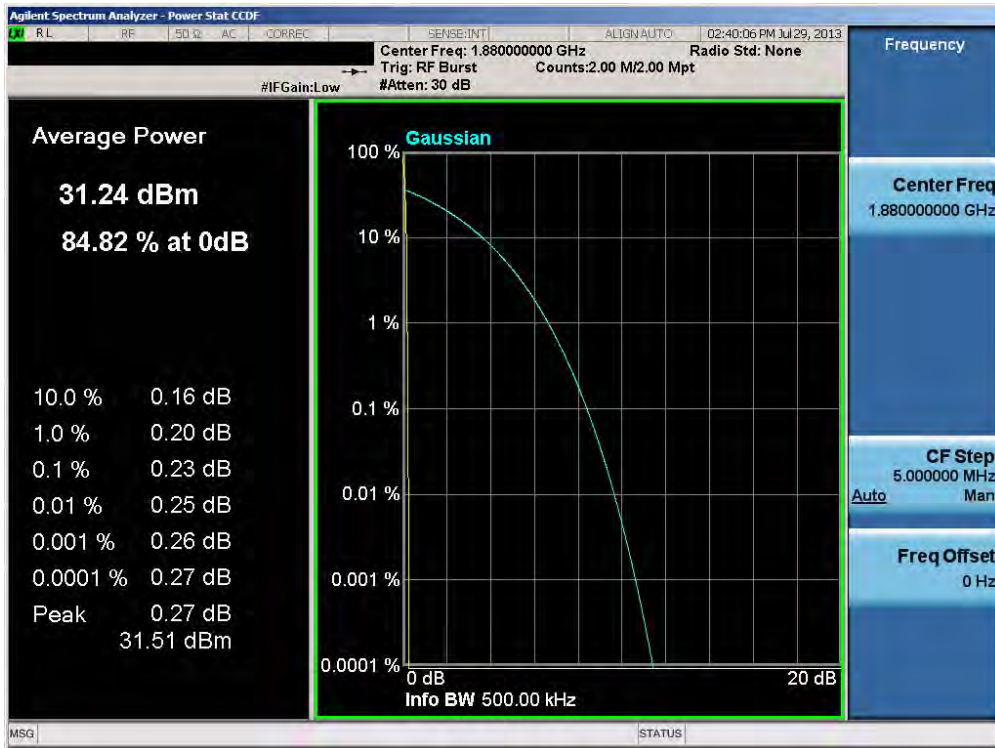


Plot 6-65. Peak-Average Ratio Plot (PCS GSM Mode – Ch. 661)

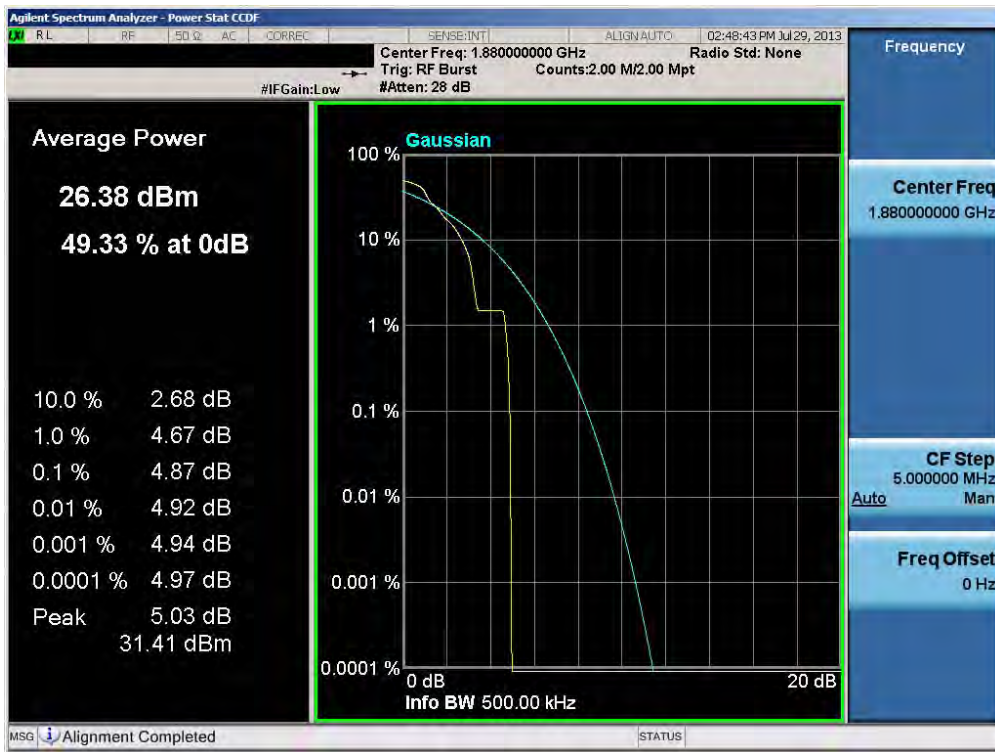

Plot 6-66. Peak-Average Ratio Plot (EDGE1900 Mode – Ch. 661)

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 52 of 89

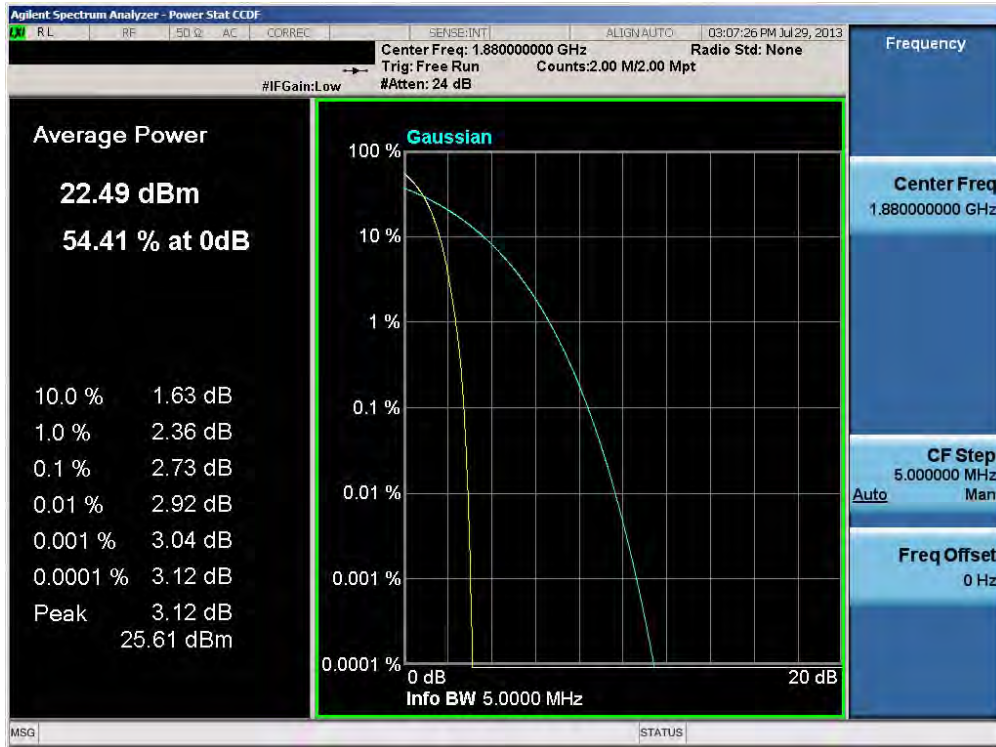

**Plot 6-67. Peak-Average Ratio Plot (PCS WCDMA Mode – Ch. 9400)**

FCC ID: A3LSMN9002	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 53 of 89

## 6.9 Peak-Average Ratio (Sub. Ant.)

§24.232(d) RSS-132(5.4) RSS-133(6.4)

### Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

### Test Procedure Used


KDB 971168 v02 – Section 5.7.1

### Test Settings

6. The signal analyzer's CCDF measurement profile is enabled
7. Frequency = carrier center frequency
8. Measurement BW > Emission bandwidth of signal
9. The signal analyzer was set to collect one million samples to generate the CCDF curve
10. The measurement interval was set depending on the type of signal analyzed. For continuous signals, the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

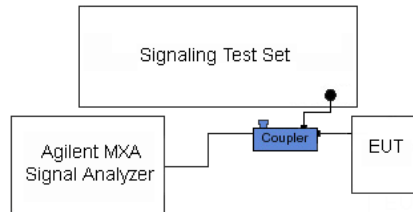


**Figure 6-8. Test Instrument & Measurement Setup**

### Test Notes

None.

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset	Page 54 of 89	

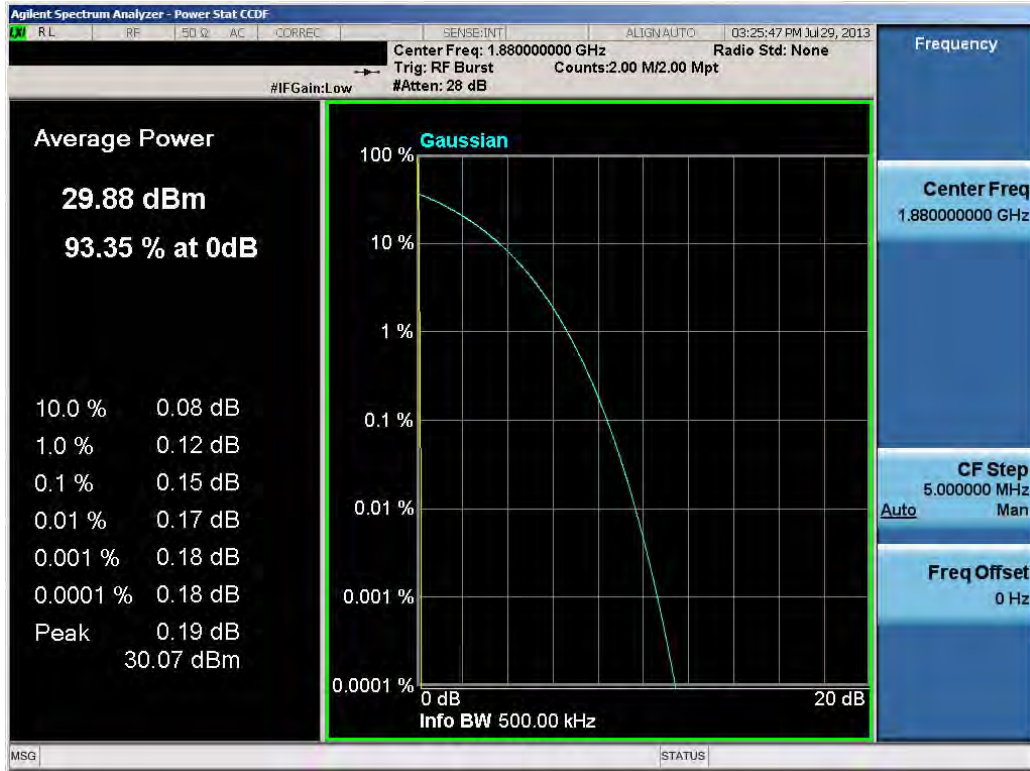

**Plot 6-68. Peak-Average Ratio Plot (PCS GSM Mode – Ch. 661)**

<b>FCC ID:</b> A3LSMN9002		<b>FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1307251428.A3L	<b>Test Dates:</b> July 28 -Aug 15, 2013	<b>EUT Type:</b> Portable Handset		Page 55 of 89

## 6.10 Radiated Power (ERP/EIRP) (Main Ant.)

§22.913(a)(2) RSS-132(4.4) [SRSP-503(5.1.3)]

### Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 v02 – Section 5.2.1

ANSI/TIA-603-C-2004 – Section 2.2.17


### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer's "time domain power" measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $\geq$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto". Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the "gating" function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize.

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset	Page 56 of 89	

### Test Setup

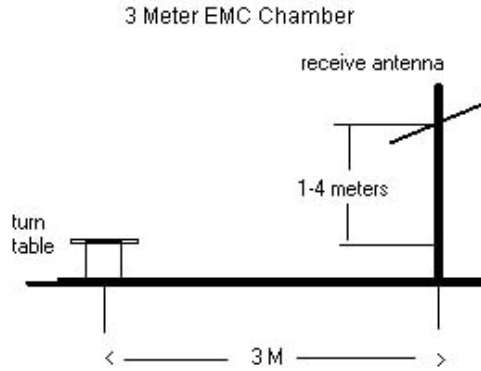

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 6-9. Test Instrument & Measurement Setup**

### Test Notes

- 1) This device was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, HSUPA, and GSM/GPRS/EDGE capabilities. For WCDMA and HSUPA transmission, all configurations were investigated and the worst case UMTS emissions were found in RMC WCDMA mode at 12.2kbps with HSDPA inactive and TPC bits all set to "1."
- 3) This unit was tested with its standard battery.
- 4) The worst case test configuration was found in the EUT in the V positioning for the Cell Band and 2H positioning for the PCS Band. The data reported in the table above was measured in this test setup.

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset	Page 57 of 89	

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBd]	EUT Pol [H/V]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
824.20	GSM850	Standard	18.83	-1.15	V	17.68	0.059	38.45	-20.77
836.60	GSM850	Standard	16.88	-1.15	V	15.73	0.037	38.45	-22.72
848.80	GSM850	Standard	17.03	-1.15	V	15.88	0.039	38.45	-22.57
824.20	EDGE850	Standard	17.16	-1.15	V	16.01	0.040	38.45	-22.45

**Table 6-2. ERP (Cellular GSM)**

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBd]	EUT Pol [H/V]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
826.40	WCDMA850	Standard	6.03	-1.15	V	4.88	0.003	38.45	-33.57
836.60	WCDMA850	Standard	7.76	-1.15	V	6.61	0.005	38.45	-31.84
846.60	WCDMA850	Standard	8.10	-1.15	V	6.95	0.005	38.45	-31.50



**Table 6-3. ERP (Cellular WCDMA)**

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBi]	EUT Pol [H/V]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GSM1900	Standard	18.87	7.97	2H	26.84	0.483	33.01	-6.17
1880.00	GSM1900	Standard	19.16	8.02	2H	27.18	0.522	33.01	-5.83
1909.80	GSM1900	Standard	18.13	8.11	2H	26.24	0.421	33.01	-6.77
1880.00	EDGE1900	Standard	14.29	8.02	2H	22.31	0.170	33.01	-10.70

**Table 6-4. EIRP (PCS GSM)**

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBi]	EUT Pol [H/V]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	Standard	10.81	8.17	2H	18.98	0.079	33.01	-14.03
1880.00	WCDMA1900	Standard	9.22	8.23	2H	17.45	0.056	33.01	-15.56
1907.60	WCDMA1900	Standard	9.41	8.31	2H	17.72	0.059	33.01	-15.29

**Table 6-5. EIRP (PCS WCDMA)**

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)					Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset				Page 58 of 89	

## 6.11 Radiated Power (ERP/EIRP) (Sub Ant.)

§22.913(a)(2) RSS-132(4.4) [SRSP-503(5.1.3)]

### Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 v02 – Section 5.2.1

ANSI/TIA-603-C-2004 – Section 2.2.17


### Test Settings

11. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer's "time domain power" measurement capability is used
12. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
13. VBW  $\geq$  3 x RBW
14. Span = 1.5 times the OBW
15. No. of sweep points  $\geq$  2 x span / RBW
16. Detector = RMS
17. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".  
Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
18. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the "gating" function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
19. Trace mode = trace averaging (RMS) over 100 sweeps
20. The trace was allowed to stabilize.

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset	Page 59 of 89	

**Test Setup**

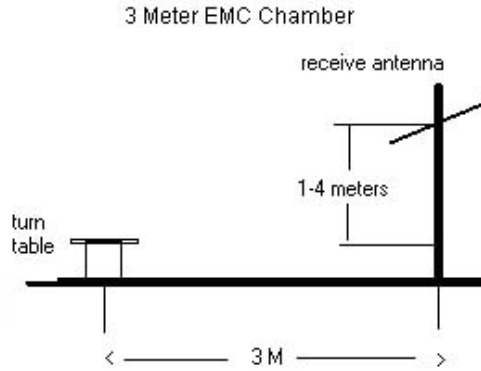

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 6-10. Test Instrument & Measurement Setup**

**Test Notes**

- 5) This device was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 6) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, HSUPA, and GSM/GPRS/EDGE capabilities. For WCDMA and HSUPA transmission, all configurations were investigated and the worst case UMTS emissions were found in RMC WCDMA mode at 12.2kbps with HSDPA inactive and TPC bits all set to "1."
- 7) This unit was tested with its standard battery.
- 8) The worst case test configuration was found in the EUT in the V positioning for the Cell Band and 2H positioning for the PCS Band. The data reported in the table above was measured in this test setup.



<b>FCC ID:</b> A3LSMN9002		<b>FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1307251428.A3L	<b>Test Dates:</b> July 28 -Aug 15, 2013	<b>EUT Type:</b> Portable Handset	Page 60 of 89	

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBd]	EUT Pol [H/V]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
824.20	GSM850	Standard	22.88	-1.15	V	21.73	0.149	38.45	-16.72
836.60	GSM850	Standard	20.67	-1.15	V	19.52	0.090	38.45	-18.93
848.80	GSM850	Standard	19.48	-1.15	V	18.33	0.068	38.45	-20.13

**Table 6-6. ERP (Cellular GSM)**

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBi]	EUT Pol [H/V]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GSM1900	Standard	6.67	7.97	H2	14.64	0.029	33.01	-18.37
1880.00	GSM1900	Standard	6.05	8.02	H2	14.07	0.026	33.01	-18.94
1909.80	GSM1900	Standard	5.18	8.11	H2	13.29	0.021	33.01	-19.72

**Table 6-7. EIRP (PCS GSM)**

<b>FCC ID:</b> A3LSMN9002		<b>FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)</b>			<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1307251428.A3L	<b>Test Dates:</b> July 28 -Aug 15, 2013	<b>EUT Type:</b> Portable Handset			Page 61 of 89

## 6.12 Radiated Spurious Emissions Measurements (Main Ant.)

§2.1053 §22.917(a) RSS-132(4.5.1)

### Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 v02 – Section 5.8


ANSI/TIA-603-C-2004 – Section 2.2.12

### Test Settings



1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq$  3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq$  2 x span / RBW
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize

### Test Setup

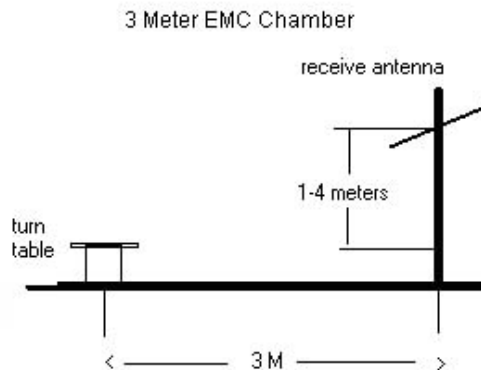The EUT and measurement equipment were set up as shown in the diagram below.





**Figure 6-11. Test Instrument & Measurement Setup**

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 62 of 89

## Test Notes

- 1) This device was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, HSUPA, and GSM/GPRS/EDGE capabilities. For WCDMA and HSUPA transmission, all configurations were investigated and the worst case UMTS emissions were found in RMC WCDMA mode at 12.2kbps with HSDPA inactive and TPC bits all set to "1."
- 3) This device was tested under all RC and SO combinations and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 4) This unit was tested with its standard battery.
- 5) The worst case test configuration was found in the EUT in the V positioning for the Cell Band and 2H positioning for the PCS Band. The data reported in the table above was measured in this test setup.
- 6) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
- 7) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 8) Peak levels at -125dBm represent the analyzer noise floor and signify that no emission was detected.

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 63 of 89

OPERATING FREQUENCY: 824.20 MHz  
 CHANNEL: 128  
 MEASURED OUTPUT POWER: 17.68 dBm = 0.059 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  30.68 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	EUT POL (H/V)	(dBc)
1648.40	-58.77	6.35	-52.42	V	70.1
2472.60	-51.77	6.60	-45.18	V	62.9
3296.80	-51.97	6.96	-45.00	V	62.7
4121.00	-81.21	7.59	-73.61	V	91.3
4945.20	-81.23	9.08	-72.15	V	89.8

Table 6-8. Radiated Spurious Data (Cellular GSM Mode – Ch. 128)

OPERATING FREQUENCY: 836.60 MHz  
 CHANNEL: 190  
 MEASURED OUTPUT POWER: 15.73 dBm = 0.037 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  28.73 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	EUT POL (H/V)	(dBc)
1673.20	-57.67	6.19	-51.49	V	67.2
2509.80	-53.37	6.58	-46.79	V	62.5
3346.40	-50.75	7.16	-43.59	V	59.3
4183.00	-81.81	8.00	-73.82	V	89.5
5019.60	-80.76	8.97	-71.79	V	87.5

Table 6-9. Radiated Spurious Data (Cellular GSM Mode – Ch. 190)

OPERATING FREQUENCY: 848.80 MHz  
 CHANNEL: 251  
 MEASURED OUTPUT POWER: 15.88 dBm = 0.039 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  28.88 dBc



FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	EUT POL (H/V)	(dBc)
1697.60	-57.34	6.03	-51.31	V	67.2
2546.40	-54.49	6.71	-47.77	V	63.7
3395.20	-50.35	7.36	-42.99	V	58.9
4244.00	-82.17	8.27	-73.90	V	89.8
5092.80	-80.13	8.83	-71.30	V	87.2

**Table 6-10. Radiated Spurious Data (Cellular GSM Mode – Ch. 251)**

OPERATING FREQUENCY: 826.40 MHz  
 CHANNEL: 4132  
 MEASURED OUTPUT POWER: 4.88 dBm = 0.003 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  17.88 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	EUT POL (H/V)	(dBc)
1652.80	-53.01	6.32	-46.69	V	51.6
2479.20	-52.94	6.58	-46.36	V	51.2
3305.60	-40.81	6.99	-33.82	V	38.7
4132.00	-81.32	7.67	-73.65	V	78.5
4958.40	-81.16	9.07	-72.09	V	77.0

**Table 6-11. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4132)**

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset	Page 65 of 89	

OPERATING FREQUENCY: 836.60 MHz  
 CHANNEL: 4183  
 MEASURED OUTPUT POWER: 6.61 dBm = 0.005 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  19.61 dBc



FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	EUT POL (H/V)	(dBc)
1673.20	-55.27	6.21	-49.07	V	55.7
2509.80	-52.55	6.56	-45.99	V	52.6
3346.40	-42.37	7.13	-35.24	V	41.8
4183.00	-81.59	7.94	-73.65	V	80.3
5019.60	-81.09	8.99	-72.09	V	78.7

**Table 6-12. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4183)**

OPERATING FREQUENCY: 846.60 MHz  
 CHANNEL: 4233  
 MEASURED OUTPUT POWER: 6.95 dBm = 0.005 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  19.95 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	EUT POL (H/V)	(dBc)
1693.20	-55.17	6.06	-49.11	V	56.1
2539.80	-56.85	6.69	-50.16	V	57.1
3386.40	-43.36	7.32	-36.04	V	43.0
4233.00	-81.88	8.23	-73.65	V	80.6
5079.60	-80.95	8.86	-72.09	V	79.0

**Table 6-13. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4233)**

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 66 of 89

OPERATING FREQUENCY: 1850.20 MHz  
 CHANNEL: 512  
 MEASURED OUTPUT POWER: 26.84 dBm = 0.483 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  39.84 dBc


FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	EUT POL (H/V)	(dBc)
3700.40	-48.79	9.93	-38.86	2H	65.7
5550.60	-47.47	11.11	-36.36	2H	63.2
7400.80	-48.91	10.74	-38.17	2H	65.0
9251.00	-74.08	12.31	-61.77	2H	88.6
11101.20	-71.12	12.90	-58.22	2H	85.1

**Table 6-14. Radiated Spurious Data (PCS GSM Mode – Ch. 512)**

OPERATING FREQUENCY: 1880.00 MHz  
 CHANNEL: 661  
 MEASURED OUTPUT POWER: 27.18 dBm = 0.522 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  40.18 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	EUT POL (H/V)	(dBc)
3760.00	-45.33	9.70	-35.63	2H	62.8
5640.00	-47.96	11.25	-36.72	2H	63.9
7520.00	-49.06	10.99	-38.07	2H	65.2
9400.00	-73.83	12.26	-61.57	2H	88.7
11280.00	-70.70	12.95	-57.75	2H	84.9

**Table 6-15. Radiated Spurious Data (PCS GSM Mode – Ch. 661)**

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset	Page 67 of 89	

OPERATING FREQUENCY: 1909.80 MHz  
 CHANNEL: 810  
 MEASURED OUTPUT POWER: 26.24 dBm = 0.421 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  39.24 dBc



FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	EUT POL (H/V)	(dBc)
3819.60	-47.22	9.48	-37.74	2H	64.0
5729.40	-49.33	11.30	-38.04	2H	64.3
7639.20	-49.55	11.22	-38.33	2H	64.6
9549.00	-73.81	12.35	-61.46	2H	87.7
11458.80	-69.89	13.12	-56.78	2H	83.0

**Table 6-16. Radiated Spurious Data (PCS GSM Mode – Ch. 810)**

OPERATING FREQUENCY: 1852.40 MHz  
 CHANNEL: 9262  
 MEASURED OUTPUT POWER: 18.98 dBm = 0.079 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  31.98 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	EUT POL (H/V)	(dBc)
3704.80	-54.95	9.91	-45.04	V	64.0
5557.20	-80.12	11.12	-69.00	V	88.0
7409.60	-74.95	10.76	-64.19	V	83.2
9262.00	-74.06	12.31	-61.76	V	80.7
11114.40	-71.08	12.90	-58.18	V	77.2

**Table 6-17. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)**

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 68 of 89

OPERATING FREQUENCY: 1880.00 MHz  
 CHANNEL: 9400  
 MEASURED OUTPUT POWER: 17.45 dBm = 0.056 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  30.45 dBc


FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	EUT POL (H/V)	(dBc)
3760.00	-53.89	9.70	-44.19	V	61.6
5640.00	-80.25	11.25	-69.00	V	86.4
7520.00	-75.18	10.99	-64.19	V	81.6
9400.00	-74.01	12.26	-61.76	V	79.2
11280.00	-71.14	12.95	-58.18	V	75.6

**Table 6-18. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)**

OPERATING FREQUENCY: 1907.60 MHz  
 CHANNEL: 9538  
 MEASURED OUTPUT POWER: 17.72 dBm = 0.059 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  30.72 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	EUT POL (H/V)	(dBc)
3815.20	-55.48	9.49	-45.99	V	63.7
5722.80	-80.29	11.29	-69.00	V	86.7
7630.40	-75.40	11.21	-64.19	V	81.9
9538.00	-74.08	12.32	-61.76	V	79.5
11445.60	-71.28	13.10	-58.18	V	75.9

**Table 6-19. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)**

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset	Page 69 of 89	

## 6.13 Radiated Spurious Emissions Measurements (Sub. Ant.)

### §2.1053 §22.917(a) RSS-132(4.5.1)

#### Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

#### Test Procedures Used

KDB 971168 v02 – Section 5.8


ANSI/TIA-603-C-2004 – Section 2.2.12

#### Test Settings


8. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
9. VBW  $\geq 3 \times$  RBW
10. Span = 1.5 times the OBW
11. No. of sweep points  $\geq 2 \times$  span / RBW
12. Detector = Peak
13. Trace mode = max hold
14. The trace was allowed to stabilize

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

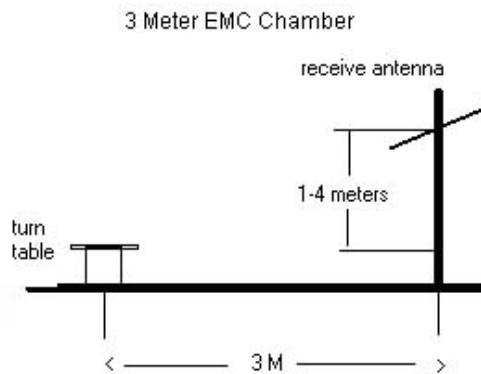

**Figure 6-12. Test Instrument & Measurement Setup**

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 70 of 89

**Test Notes**

- 9) This device was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 10) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, HSUPA, and GSM/GPRS/EDGE capabilities. For WCDMA and HSUPA transmission, all configurations were investigated and the worst case UMTS emissions were found in RMC WCDMA mode at 12.2kbps with HSDPA inactive and TPC bits all set to "1."
- 11) This device was tested under all RC and SO combinations and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 12) This unit was tested with its standard battery.
- 13) The worst case test configuration was found in the EUT in the V positioning for the Cell Band and 2H positioning for the PCS Band. The data reported in the table above was measured in this test setup.
- 14) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
- 15) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 16) Peak levels at -125dBm represent the analyzer noise floor and signify that no emission was detected.

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 71 of 89

OPERATING FREQUENCY: 824.20 MHz  
 CHANNEL: 128  
 MEASURED OUTPUT POWER: 21.73 dBm = 0.149 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  34.73 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	EUT POL (H/V)	(dBc)
1648.40	-41.42	6.35	-35.07	V	56.8
2472.60	-44.60	6.60	-38.00	V	59.7
3296.80	-83.06	6.96	-76.10	V	97.8
4121.00	-81.21	7.59	-73.61	V	95.3
4945.20	-81.23	9.08	-72.15	V	93.9

**Table 6-20. Radiated Spurious Data (Cellular GSM Mode – Ch. 128)**

OPERATING FREQUENCY: 836.60 MHz  
 CHANNEL: 190  
 MEASURED OUTPUT POWER: 19.52 dBm = 0.090 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  32.52 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	EUT POL (H/V)	(dBc)
1673.20	-42.98	6.19	-36.79	V	56.3
2509.80	-47.36	6.58	-40.78	V	60.3
3346.40	-50.77	7.16	-43.61	V	63.1
4183.00	-81.81	8.00	-73.82	V	93.3
5019.60	-80.76	8.97	-71.79	V	91.3

**Table 6-21. Radiated Spurious Data (Cellular GSM Mode – Ch. 190)**

OPERATING FREQUENCY: 848.80 MHz  
 CHANNEL: 251  
 MEASURED OUTPUT POWER: 18.33 dBm = 0.068 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  31.33 dBc


FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	EUT POL (H/V)	(dBc)
1697.60	-41.71	6.03	-35.68	V	54.0
2546.40	-47.08	6.71	-40.37	V	58.7
3395.20	-49.97	7.36	-42.61	V	60.9
4244.00	-82.17	8.27	-73.90	V	92.2
5092.80	-80.13	8.83	-71.30	V	89.6

**Table 6-22. Radiated Spurious Data (Cellular GSM Mode – Ch. 251)**

OPERATING FREQUENCY: 1850.20 MHz  
 CHANNEL: 512  
 MEASURED OUTPUT POWER: 14.64 dBm = 0.029 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  27.64 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	EUT POL (H/V)	(dBc)
3700.40	-35.90	9.93	-25.97	H2	40.6
5550.60	-48.64	11.11	-37.54	H2	52.2
7400.80	-74.93	10.74	-64.19	H2	78.8
9251.00	-74.08	12.31	-61.77	H2	76.4
11101.20	-71.12	12.90	-58.22	H2	72.9

**Table 6-23. Radiated Spurious Data (PCS GSM Mode – Ch. 512)**

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset	Page 73 of 89	

OPERATING FREQUENCY: 1880.00 MHz  
 CHANNEL: 661  
 MEASURED OUTPUT POWER: 14.07 dBm = 0.026 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  27.07 dBc



FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	EUT POL (H/V)	(dBc)
3760.00	-35.02	9.70	-25.32	H2	39.4
5640.00	-48.89	11.25	-37.64	H2	51.7
7520.00	-75.16	10.99	-64.17	H2	78.2
9400.00	-73.83	12.26	-61.57	H2	75.6
11280.00	-70.70	12.95	-57.75	H2	71.8

**Table 6-24. Radiated Spurious Data (PCS GSM Mode – Ch. 661)**

OPERATING FREQUENCY: 1909.80 MHz  
 CHANNEL: 810  
 MEASURED OUTPUT POWER: 13.29 dBm = 0.021 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  26.29 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	EUT POL (H/V)	(dBc)
3819.60	-33.37	9.48	-23.89	H2	37.2
5729.40	-49.11	11.30	-37.82	H2	51.1
7639.20	-75.43	11.22	-64.21	H2	77.5
9549.00	-73.81	12.35	-61.46	H2	74.7
11458.80	-69.89	13.12	-56.78	H2	70.1

**Table 6-25. Radiated Spurious Data (PCS GSM Mode – Ch. 810)**

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset	Page 74 of 89	

## 6.14 Frequency Stability / Temperature Variation (Main Ant.)

§2.1055 §22.355 §24.229 §24.235 RSS-132(4.3) RSS-133(6.3)

### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-C-2004. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

***For Part 22, the frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency. For Part 24, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.***

### Test Procedure Used

ANSI/TIA-603-C-2004

### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

### Test Notes

None

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset	Page 75 of 89	



### Frequency Stability / Temperature Variation (Cont'd)

§2.1055 §22.355 §24.229 §24.235 §27.54 RSS-132(4.3) RSS-133(6.3) RSS-139(6.3)


OPERATING FREQUENCY: 836,600,000 Hz  
 CHANNEL: 190  
 REFERENCE VOLTAGE: 3.8 VDC  
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	836,599,997	-3	-0.0000003
100 %		- 30	836,599,996	-4	-0.0000005
100 %		- 20	836,599,999	-1	-0.0000001
100 %		- 10	836,599,982	-18	-0.0000021
100 %		0	836,599,989	-11	-0.0000013
100 %		+ 10	836,599,982	-18	-0.0000021
100 %		+ 20	836,599,996	-4	-0.0000005
100 %		+ 30	836,599,980	-20	-0.0000023
100 %		+ 40	836,599,988	-12	-0.0000014
100 %		+ 50	836,599,980	-20	-0.0000023
115 %		4.37	+ 20	836,599,991	-9
BATT. ENDPOINT	3.40	+ 20	836,599,988	-12	-0.0000015



**Table 6-26. Frequency Stability Data (Cellular GSM Mode – Ch. 190)**

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset	Page 76 of 89	

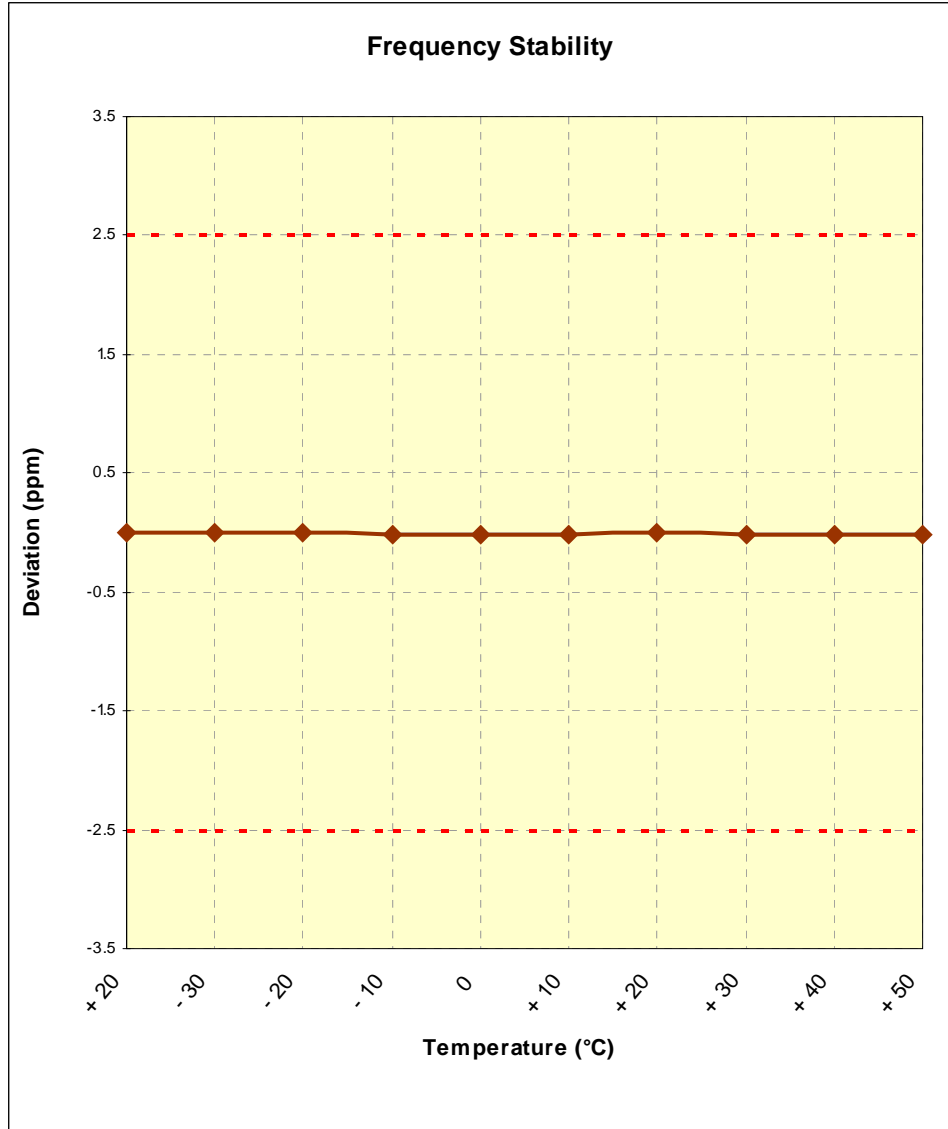**Frequency Stability / Temperature Variation (Cont'd)**  
**§2.1055 §22.355 RSS-132(4.3)**



**Figure 6-13. Frequency Stability Graph (Cellular GSM Mode – Ch. 190)**

<b>FCC ID:</b> A3LSMN9002		<b>FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1307251428.A3L	<b>Test Dates:</b> July 28 -Aug 15, 2013	<b>EUT Type:</b> Portable Handset		Page 77 of 89

## Frequency Stability / Temperature Variation (Cont'd)

§2.1055 §22.355 RSS-132(4.3)

OPERATING FREQUENCY: 836,600,000 Hz



CHANNEL: 4183

REFERENCE VOLTAGE: 3.8 VDC


DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	836,599,988	-12	-0.0000014
100 %		- 30	836,599,999	-1	-0.0000001
100 %		- 20	836,599,981	-19	-0.0000022
100 %		- 10	836,599,995	-5	-0.0000006
100 %		0	836,599,998	-2	-0.0000002
100 %		+ 10	836,599,992	-8	-0.0000010
100 %		+ 20	836,599,996	-4	-0.0000004
100 %		+ 30	836,599,998	-2	-0.0000002
100 %		+ 40	836,599,990	-10	-0.0000011
100 %		+ 50	836,599,983	-17	-0.0000020
115 %	4.37	+ 20	836,599,987	-13	-0.0000016
BATT. ENDPOINT	3.40	+ 20	836,599,990	-10	-0.0000012



**Table 6-27. Frequency Stability Data (Cellular WCDMA Mode – Ch. 4183)**

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset	Page 78 of 89	

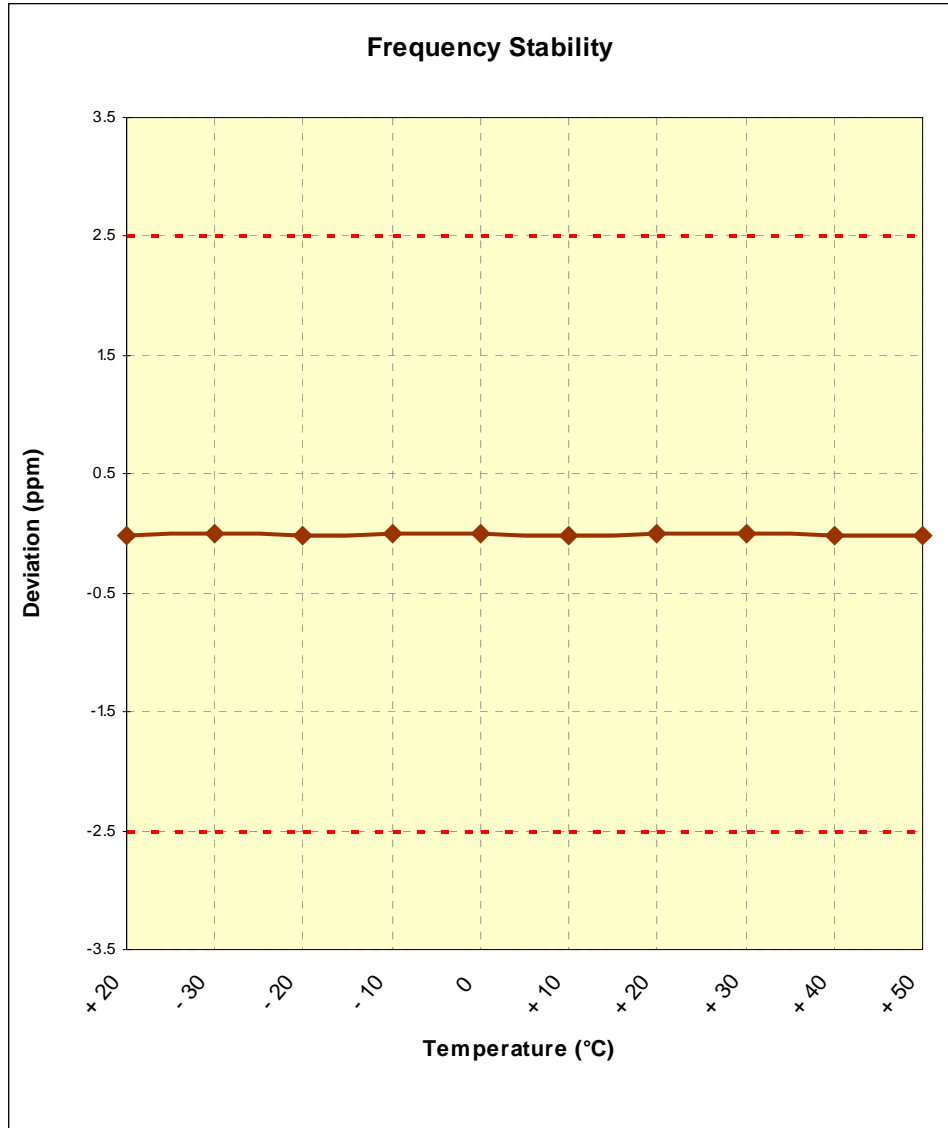**Frequency Stability / Temperature Variation (Cont'd)**  
**§2.1055 §22.355 RSS-132(4.3)**



**Figure 6-14. Frequency Stability Graph (Cellular WCDMA Mode – Ch. 4183)**

<b>FCC ID:</b> A3LSMN9002		<b>FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1307251428.A3L	<b>Test Dates:</b> July 28 -Aug 15, 2013	<b>EUT Type:</b> Portable Handset	Page 79 of 89	

## Frequency Stability / Temperature Variation (Cont'd)

§2.1055 §24.235 RSS-139(6.3)

OPERATING FREQUENCY: 1,880,000,000 Hz

CHANNEL: 661



REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,879,999,996	-4	-0.0000002
100 %		- 30	1,879,999,984	-16	-0.0000008
100 %		- 20	1,879,999,987	-13	-0.0000007
100 %		- 10	1,879,999,993	-7	-0.0000004
100 %		0	1,879,999,981	-19	-0.0000010
100 %		+ 10	1,879,999,988	-12	-0.0000006
100 %		+ 20	1,879,999,994	-6	-0.0000003
100 %		+ 30	1,879,999,981	-19	-0.0000010
100 %		+ 40	1,879,999,998	-2	-0.0000001
100 %		+ 50	1,879,999,993	-7	-0.0000004
115 %		4.37	+ 20	1,879,999,998	-2
BATT. ENDPOINT	3.40	+ 20	1,879,999,999	-1	0.0000000


**Table 6-28. Frequency Stability Data (PCS GSM Mode – Ch. 661)**

**Note:**



Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset	Page 80 of 89	

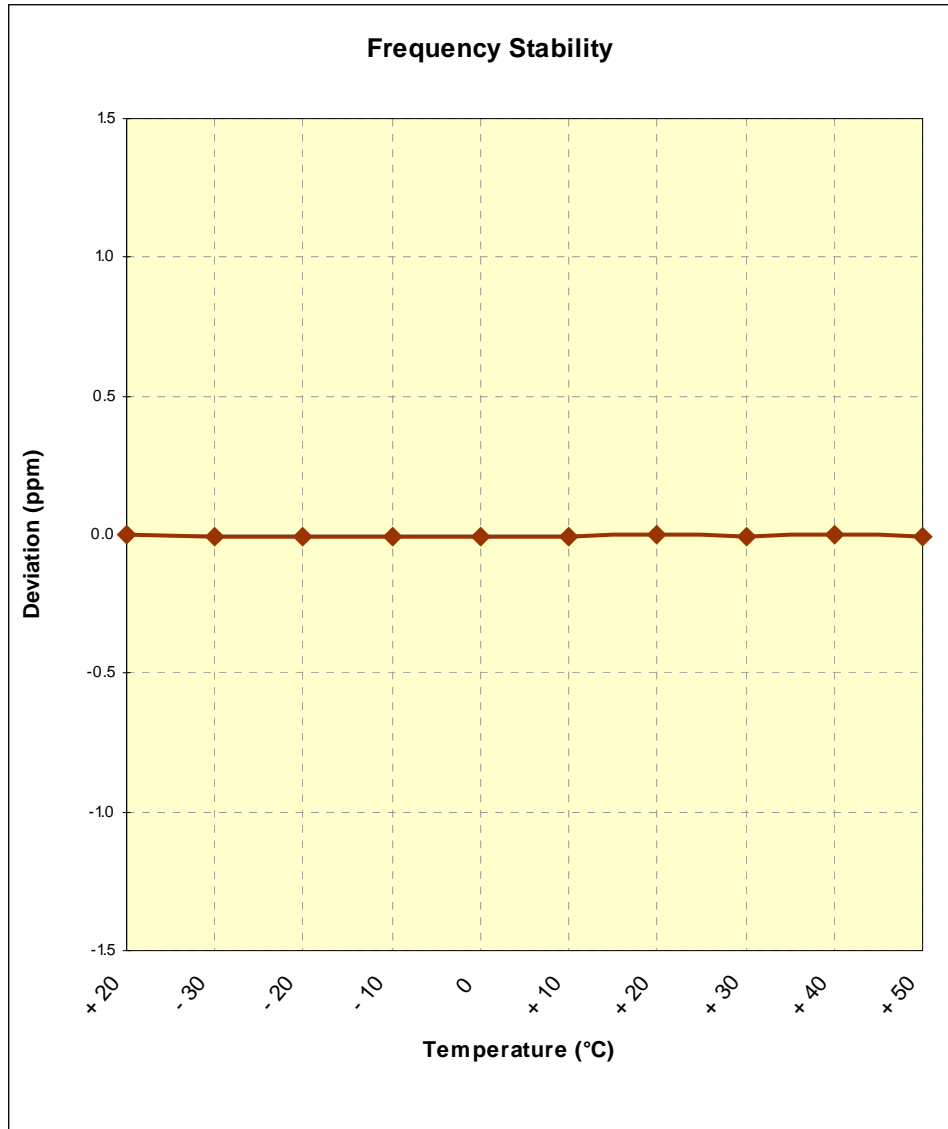**Frequency Stability / Temperature Variation (Cont'd)**  
**§2.1055 §24.235 RSS-139(6.3)**



**Figure 6-15. Frequency Stability Graph (PCS GSM Mode – Ch. 661)**

<b>FCC ID:</b> A3LSMN9002		<b>FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1307251428.A3L	<b>Test Dates:</b> July 28 -Aug 15, 2013	<b>EUT Type:</b> Portable Handset	Page 81 of 89	

## Frequency Stability / Temperature Variation (Cont'd)

§2.1055 §24.235 RSS-139(6.3)

OPERATING FREQUENCY: 1,880,000,000 Hz

CHANNEL: 9400

REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,879,999,993	-7	-0.0000004
100 %		- 30	1,879,999,992	-8	-0.0000004
100 %		- 20	1,879,999,996	-4	-0.0000002
100 %		- 10	1,879,999,985	-15	-0.0000008
100 %		0	1,879,999,996	-4	-0.0000002
100 %		+ 10	1,879,999,983	-17	-0.0000009
100 %		+ 20	1,879,999,996	-4	-0.0000002
100 %		+ 30	1,879,999,998	-2	-0.0000001
100 %		+ 40	1,879,999,988	-12	-0.0000006
100 %		+ 50	1,879,999,987	-13	-0.0000007
115 %		4.37	+ 20	1,879,999,980	-20
BATT. ENDPOINT	3.40	+ 20	1,879,999,990	-10	-0.0000006


**Table 6-29. Frequency Stability Data (PCS WCDMA Mode – Ch. 9400)**

**Note:**



Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset	Page 82 of 89	

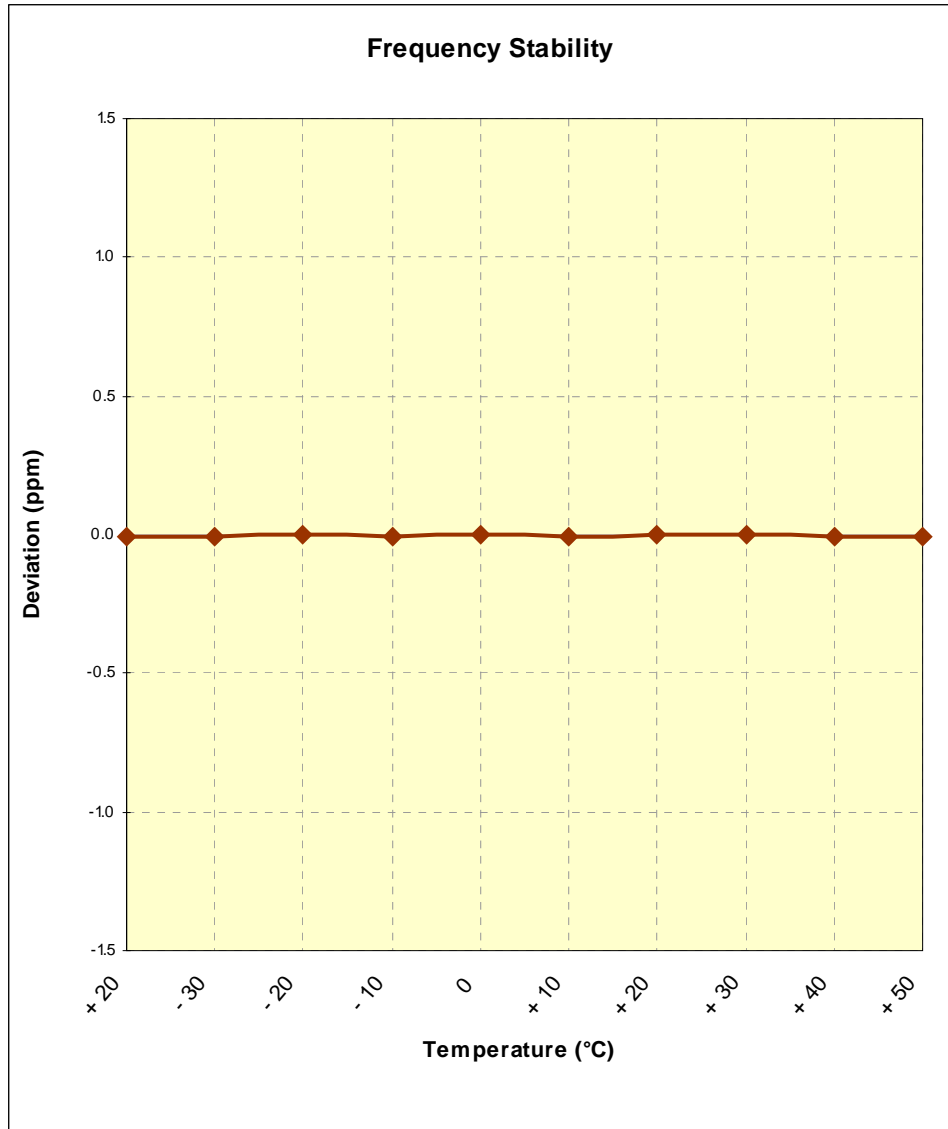**Frequency Stability / Temperature Variation (Cont'd)**  
**§2.1055 §24.235 RSS-139(6.3)**



**Figure 6-16. Frequency Stability Graph (PCS WCDMA Mode – Ch. 9400)**

<b>FCC ID:</b> A3LSMN9002		<b>FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1307251428.A3L	<b>Test Dates:</b> July 28 -Aug 15, 2013	<b>EUT Type:</b> Portable Handset	Page 83 of 89	

## 6.15 Frequency Stability / Temperature Variation (Main Ant.)

§2.1055 §22.355 §24.229 §24.235 RSS-132(4.3) RSS-133(6.3)

### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-C-2004. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

***For Part 22, the frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency. For Part 24, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.***

### Test Procedure Used

ANSI/TIA-603-C-2004

### Test Settings


4. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
5. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
6. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

### Test Notes

None

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset	Page 84 of 89	

### Frequency Stability / Temperature Variation (Cont'd)

§2.1055 §22.355 §24.229 §24.235 §27.54 RSS-132(4.3) RSS-133(6.3) RSS-139(6.3)

OPERATING FREQUENCY: 836,600,000 Hz



CHANNEL: 190

REFERENCE VOLTAGE: 3.8 VDC


DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	836,599,994	-6	-0.0000008
100 %		- 30	836,599,980	-20	-0.0000023
100 %		- 20	836,599,991	-9	-0.0000011
100 %		- 10	836,599,991	-9	-0.0000011
100 %		0	836,599,991	-9	-0.0000011
100 %		+ 10	836,599,994	-6	-0.0000007
100 %		+ 20	836,599,988	-12	-0.0000014
100 %		+ 30	836,599,999	-1	-0.0000001
100 %		+ 40	836,599,983	-17	-0.0000020
100 %		+ 50	836,599,984	-16	-0.0000020
115 %	4.37	+ 20	836,599,981	-19	-0.0000023
BATT. ENDPOINT	3.40	+ 20	836,599,984	-16	-0.0000019



**Table 6-30. Frequency Stability Data (Cellular GSM Mode – Ch. 190)**

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset	Page 85 of 89	

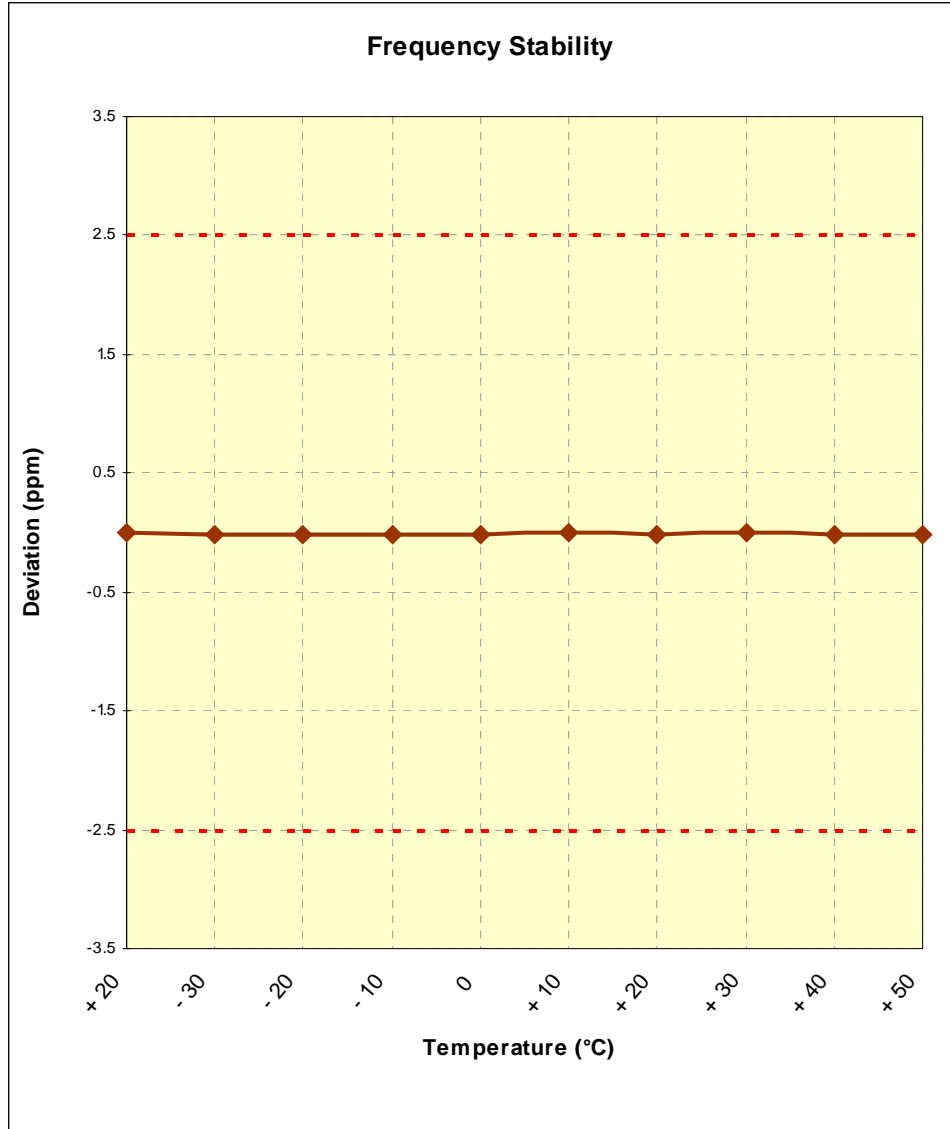**Frequency Stability / Temperature Variation (Cont'd)**  
**§2.1055 §22.355 RSS-132(4.3)**



**Figure 6-17. Frequency Stability Graph (Cellular GSM Mode – Ch. 190)**

<b>FCC ID:</b> A3LSMN9002		<b>FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1307251428.A3L	<b>Test Dates:</b> July 28 -Aug 15, 2013	<b>EUT Type:</b> Portable Handset	Page 86 of 89	

## Frequency Stability / Temperature Variation (Cont'd)

§2.1055 §24.235 RSS-139(6.3)

OPERATING FREQUENCY: 1,880,000,000 Hz

CHANNEL: 661



REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,879,999,991	-9	-0.0000005
100 %		- 30	1,879,999,984	-16	-0.0000008
100 %		- 20	1,879,999,986	-14	-0.0000008
100 %		- 10	1,879,999,989	-11	-0.0000006
100 %		0	1,879,999,991	-9	-0.0000005
100 %		+ 10	1,879,999,982	-18	-0.0000009
100 %		+ 20	1,879,999,992	-8	-0.0000004
100 %		+ 30	1,879,999,996	-4	-0.0000002
100 %		+ 40	1,879,999,995	-5	-0.0000003
100 %		+ 50	1,879,999,993	-7	-0.0000004
115 %		4.37	+ 20	1,879,999,990	-10
BATT. ENDPOINT	3.40	+ 20	1,879,999,990	-10	-0.0000005

Table 6-31. Frequency Stability Data (PCS GSM Mode – Ch. 661)


**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset	Page 87 of 89	

**Frequency Stability / Temperature Variation (Cont'd)**

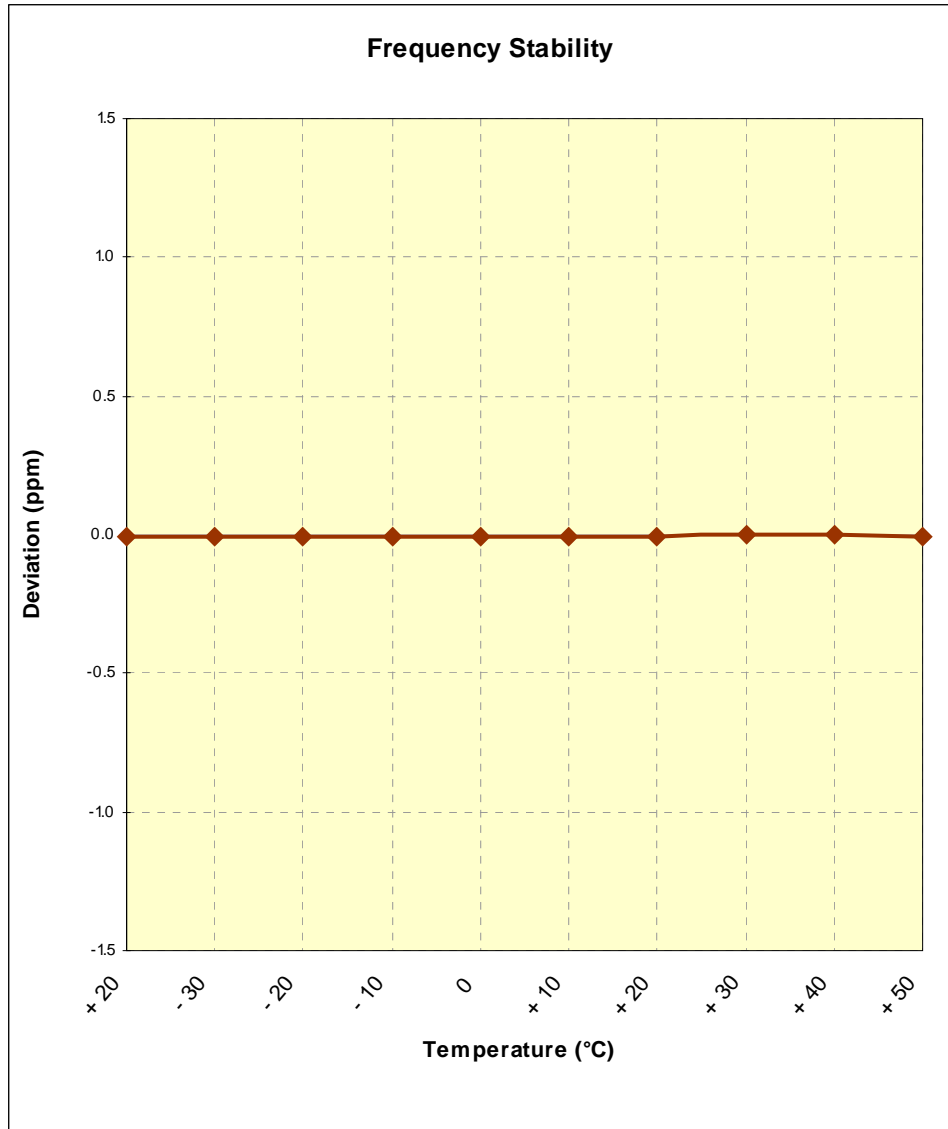§2.1055 §24.235 RSS-139(6.3)



**Figure 6-18. Frequency Stability Graph (PCS GSM Mode – Ch. 661)**

<b>FCC ID:</b> A3LSMN9002		<b>FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1307251428.A3L	<b>Test Dates:</b> July 28 -Aug 15, 2013	<b>EUT Type:</b> Portable Handset		Page 88 of 89

## 7.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMN9002** complies with all the requirements of Parts 2, 22, 24 of the FCC rules.

FCC ID: A3LSMN9002		FCC Pt. 22, 24 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307251428.A3L	Test Dates: July 28 -Aug 15, 2013	EUT Type: Portable Handset		Page 89 of 89