



# EMC TEST REPORT

<b>Project No.</b>	LBE20134117	<b>Issue No.</b>	0
<b>Applicant</b>	<b>Name of organization</b>	Samsung Electronics Co., Ltd.	
	<b>Address</b>	( Maetan-dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-742, Republic of Korea	
	<b>Date of application</b>	July 25, 2013	
<b>EUT</b>	<b>Type of device</b>	<input checked="" type="checkbox"/> Class B personal computers and peripherals <input type="checkbox"/> All other devices	
	<b>Equipment authorization</b>	<input type="checkbox"/> Declaration of Conformity <input checked="" type="checkbox"/> Certification <input type="checkbox"/> Verification	
	<b>FCC ID</b>	A3LSMN9008	
	<b>Kind of product</b>	Mobile Phone	
	<b>Model No.</b>	SM-N9008	
	<b>Variant Model No.</b>	Refer to clause 4.6	
	<b>Manufacturer</b>	SAMSUNG ELECTRONICS CO., LTD. 94-1, Imsu-dong, Gumi-si, Gyengsangbuk-do, 730-722, Republic of Korea  SAMSUNG ELECTRONICS TianJin CO.,LTD. 300385 Tianjin, CHINA. Xiqing No.9 Wei 5Rd Micro-electronics park	
<b>Applied Standards</b>	FCC Part 15, Subpart B, Class B / ANSI C63.4-2009		
<b>Test Period</b>	July 26, 2013 ~ August 6, 2013		
<b>Issue date</b>	August 12, 2013		
<b>Test result : Complied</b>			
The equipment under test has found to be compliant with the applied standards. (Refer to the attached test result for more detail.)			
<b>Tested by</b> : Jeong-Soo Kim		<b>Reviewed by</b> : Tae-Young Jang	
			

The test results in this report only apply to the tested sample. This report must not be reproduced, except in full, without written permission from CS & Environment center.



( Maetan dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-742, Republic of Korea  
 Tel: 82 31 279 1750, Fax: 82 31 279 1745

# Table of contents

## 1. Report Information

1.1 Revision history .....	3
----------------------------	---

## 2. Summary of test results

2.1 Emission .....	3
--------------------	---

## 3. General Information

3.1 Test facility .....	3
-------------------------	---

## 4. Test Configuration

4.1 Test Peripherals .....	4
----------------------------	---

4.2 EUT operating mode .....	4
------------------------------	---

4.3 Details of Sampling .....	4
-------------------------------	---

4.4 Used cable description .....	5
----------------------------------	---

4.5 Test arrangement .....	5
----------------------------	---

4.6 EUT Description .....	6
---------------------------	---

4.7 Clock Frequencies .....	6
-----------------------------	---

4.8 Test configuration and condition .....	7
--	---

4.9 Measurement uncertainty .....	7
-----------------------------------	---

## 5. Result of individual tests

5.1 Conducted disturbance .....	8
---------------------------------	---

5.2 Radiated disturbance .....	10
--------------------------------	----

# 1. Report Information

## 1.1 Revision history

No	Revised detailed information
Issue 0	- LBE20134117 (SAMSUNG)

# 2. Summary of test results

## 2.1 Emission

The EUT has been tested according to the following specifications:

Applied	Test type	Applied standard	Result
<input checked="" type="checkbox"/>	Conducted Disturbance (Mains port)	FCC Part 15 Subpart B / ANSI C63.4-2009 (Class B)	Complied
<input checked="" type="checkbox"/>	Radiated Disturbance		Complied

# 3. General Information

## 3.1 Test facility

The CS & Environment center is located on Samsung Electronics Co., Ltd. at ( Maetan-dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-742, Republic of Korea.

All testing are performed in Semi-anechoic chambers conforming to the site attenuation characteristics defined by ANSI C63.4, CISPR 22, 16-1 and 16-2. and Shielded rooms.

The CS & Environment center is operated as testing laboratory in accordance with the requirements of ISO/IEC 17025:2005.

## 4. Test Setup configuration

### 4.1 Test Peripherals

The cables used for these peripherals are either permanently attached by the peripheral manufacturer or coupled with an assigned cable as defined below.

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Mark	Description	Model No.	Serial No.	Manufacturer / Trademark	FCC ID / DoC
A	Mobile Phone	SM-N9008	-	SAMSUNG	A3LSMN9008
B	Battery	B800BE	AAaD719sS/2-B	SAMSUNG	-
C	Headset	EO-HS3303WE	-	SAMSUNG	-
D	Data Cable	ET-DQ10Y0WE	-	SAMSUNG	-
E	microSD Card	16GB	-	SANDISK	-
F	Desk-Top Computer	DM300S3A	EBDEDC6FFD	SAMSUNG	DoC
			-	SAMSUNG	DoC
G	LCD TV Monitor	CF19MS	CF19H1LS700048Y	SAMSUNG	DoC
		EF23TS	EM23H1LS300070L	SAMSUNG	DoC
H	Mouse	SML-210PB	TAKD125021R	SAMSUNG	DoC
I	Keyboard	SDM8500P	8M001183	SAMSUNG	DoC
J	Gigabit Switch 8	3CGSU08	AB/9XRQAC0024825	3COM	DoC
	Gigabit Switch 8	J9794A	CN33FQ71XK	HP	DoC
K	Power Supply	PW150	KA1203N03	AULT	DoC
	Power Supply	EADP-15DC A	DIKD1245096576	HP	DoC

### 4.2 EUT operating mode

To achieve compliance applied standard specification, the following mode(s) were made during compliance testing:

<b>Operating Mode 1</b>	USB Mode (Data Communication)
-------------------------	-------------------------------

### 4.3 Details of Sampling


Customer selected, single unit.

## 4.4 Used cable description

The EUT is configured, installed, arranged and operated in a manner consistent with typical applications. Interface cables/loads/devices are connected to at least one of each type of interface port of the EUT, and where practical, each cable shall be terminated in a device typical of actual usage. The type(s) of interconnecting cables to be used and the interface port (of the EUT) to which these were connected:

No.	Connected cable	Length [m]	Shielded [Y/N]	Note
1	Data Cable	1.5	Yes	From EUT to Desktop PC
2	Headset	1.2	No	For EUT
3	PS/2	1.8	Yes	For Keyboard
4	PS/2	1.8	Yes	For Mouse
5	Power	1.8	No	For Desktop PC
6	Power	1.8	No	For LCD Monitor
7	Power	1.8	No	From Gigabit Switch 8 to Power Supply
8	Power	1.8	No	For Power Supply
9	RGB Cable	1.8	Yes	From Monitor to Desktop PC
10	LAN cable	1.5	Yes	From Desktop PC to Router
11	LAN cable	1.5	Yes	From Router to Local Area Network

## 4.5 Test arrangement

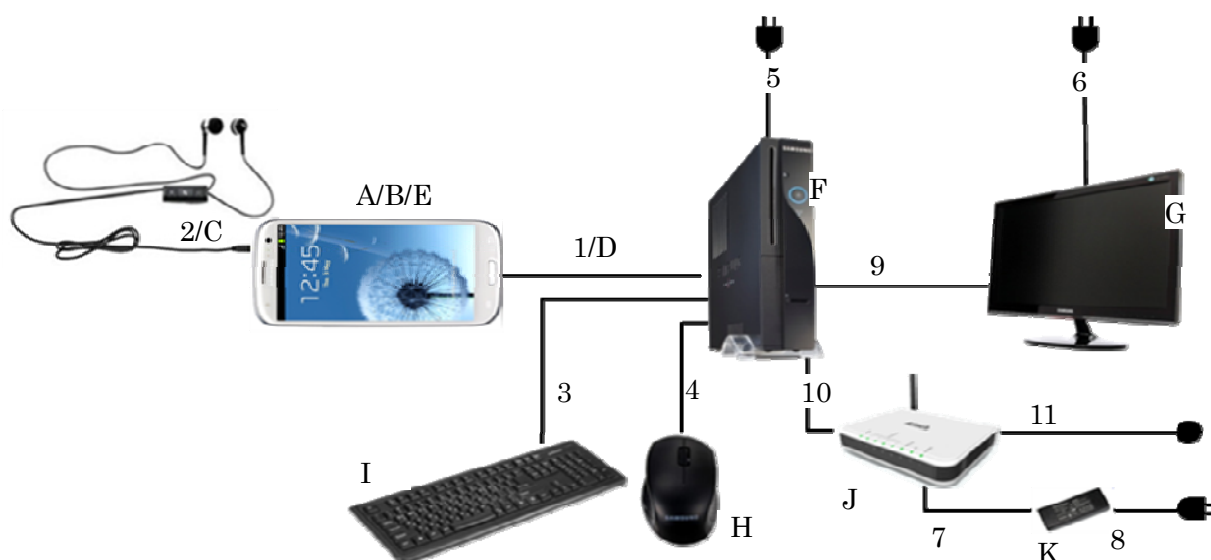

## 4.6 EUT Description

4.6.1 The following features describe EUT represented by this report:

Item	Specification	
Frequency Range	GSM850	TX : 824.2 ~ 848.8 MHz RX : 869.2 ~ 893.8 MHz
	GSM1900	TX : 1 850.2 ~ 1 909.8 MHz RX : 1 930.2 ~ 1 989.8 MHz
	WCDMA B2	TX : 1 852.4 ~ 1 907.6 MHz RX : 1 932.4 ~ 1 987.6 MHz
	WCDMA B5	TX : 826.4 ~ 846.6 MHz RX : 871.4 ~ 891.6 MHz
Operating Temperature (°C)	-20 ~ +60	
Operating Humidity (%)	0 ~ 95	

4.6.2 The variant models

- None

## 4.7 Clock Frequencies

Kind of Clocks	Frequency [ MHz ]
CPU	2 300

## 4.8 Test configuration and condition

- The EUT exercise program which is the samsung standardized emission test program for windows was used during all EMC measurements were tested. This program was contained on the PC hard disk drive. Once loaded, the program sequentially exercises each system component in turn.
- The EUT was exercised during the testing by data read and write cycles repeated with internal storage devices. At the end of the test, the copied back data was compared with original.
- The EUT was connected to the PC by using USB data cable to charge.
- The system was configured for testing in a typical fashion that a customer would normally use, and was tested while in an automated non-attendant mode.

Power source for the EUT operating was supplied by CVCF made by the Pacific Power Source Corp.

**- Test Voltage : AC 120 V, 60 Hz**

## 4.9 Measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus: (According to CISPR 16-4 and UKAS Lab 34.)

### 4.9.1 Emission

Test type		Measurement uncertainty (C.L. 95 %, k = 2)
Conducted disturbance	AC Mains	±3.12 dB
Radiated Disturbance (30 MHz ~ 1 GHz)	Horizontal	±4.03 dB
	Vertical	±4.13 dB
Radiated Disturbance (1 GHz ~ 6 GHz)	Horizontal	±4.53 dB
	Vertical	±4.51 dB

## 5. Results of individual test

### 5.1 Conducted disturbance

The EUT was connected to the Desk-Top Computer which was powered from one LISN for the measurements. The support equipment power cables were connected to a second LISN. Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration. The EUT measured in accordance with the methods described in standards.

#### Limits for conducted disturbance at the mains ports

Frequency range Limits MHz	Resolution Bandwidth	Limits dB( $\mu$ V)	
		Quasi-peak	Average
0,15 to 0,50	9 kHz	66 to 56	56 to 46
0,50 to 5	9 kHz	56	46
5 to 30	9 kHz	60	50

NOTE 1 The lower limit shall apply at the transition frequency.  
NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

#### 5.1.1 Test instrumentation


EMC No.	Test Instrument	Model name	Manufacturer	Serial No.	Calibration	
					Date	Interval (Month)
E5I-010	LISN	ESH3-Z5	R&S	100263	2012-10-16	12
E5I-016	EMI Test Receiver	ESU8	R&S	100482	2013-06-11	12
E5I-043	LISN	ENV216	R&S	101630	2013-06-07	12

#### 5.1.2 Temperature and humidity condition

Test date	2013-08-06	Test engineer	Jeong-Soo Kim
Climate condition	Ambient temperature	22.5 °C	Limit (15.0 to 35.0) °C
	Relative humidity	55.1 % R.H.	Limit (25.0 to 75.0) % R.H.
	Atmospheric pressure	100.0 kPa	Limit (86.0 to 106.0) kPa
Test place	Shield Room (SR14)		

### 5.1.3 Test results

#### - Operating Mode 1: AC Mains

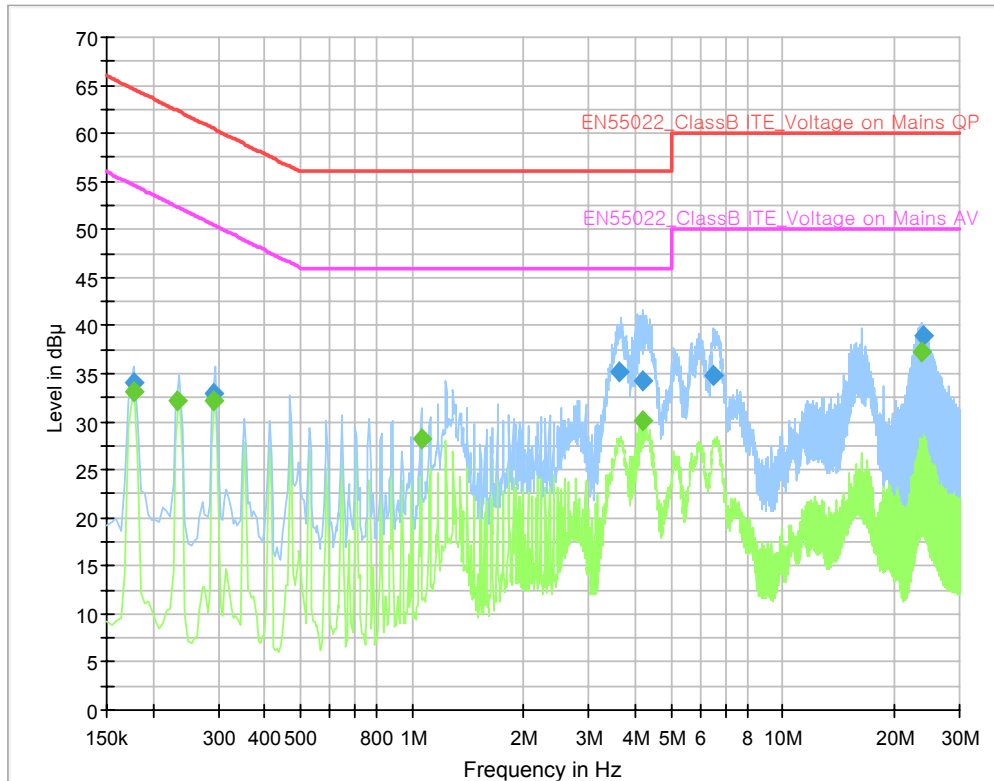

Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

Quasi-peak /Average final measurement results table:

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.178	---	33.1	54.6	21.5	L1	9.9
0.178	34.1	---	64.6	30.5	L1	9.9
0.234	---	32.3	52.3	20.0	L1	9.8
0.292	33.0	---	60.5	27.5	L1	9.9
0.292	---	32.3	50.5	18.2	L1	9.9
1.057	---	28.2	46.0	17.8	L1	9.8
3.638	35.2	---	56.0	20.8	N	9.7
4.167	---	30.0	46.0	16.0	N	9.7
4.174	34.3	---	56.0	21.7	L1	9.7
6.507	34.8	---	60.0	25.2	L1	9.7
23.804	---	37.3	50.0	12.7	N	10.0
23.863	38.9	---	60.0	21.1	N	10.0

Note 2) Level (QP and/or AV) = Meter Reading (QP and/or AV) + Corr. (LISN Insertion Loss + Cable Loss)

Margin (QP and/or AV) = Limit – Level (QP and/or AV)

QP = Quasi-Peak, AV = Average

## 5.2 Radiated disturbance

The following data lists the significant emission frequencies, measured levels, correction factors (for antenna and cables), orientation of table, polarization and height of antenna, the corrected reading, the limit, and the amount of margin

Peak measurements were made over the changeable frequency range 30 MHz to 1 GHz at a measurement distance of 10 m for the following antenna and turntable arrangements:

Antenna Height [ cm ]	Antenna Polarisation	Resolution bandwidth	Video bandwidth	Turntable position [ degrees ]
100 ~ 400	Horizontal, Vertical	120 kHz	300 kHz	Continuous

Measurements within 6 dB of the limit were then maximized by adjusting turntable position. Final measurements were made using quasi-peak detectors.

### Limits for radiated disturbance of ITE at a measuring distance of 3 m and 10m

Frequency range Limits [ MHz ]	Field Strength		
	3 m [ $\mu\text{V/m}$ ]	3 m [ dB( $\mu\text{V/m}$ ) ]	10 m [ dB( $\mu\text{V/m}$ ) ]
30 to 88	100	40.0	29.5
88 to 216	150	43.5	33.0
216 to 960	200	46.0	35.5
Above 960	500	54.0	43.5

Peak/RMS-Average measurements were made over the changeable frequency range 1GHz to 40GHz or 5<sup>th</sup> in accordance with internal maximum operating frequency at a measurement distance of 3m for the following antenna and turntable arrangements:

Antenna Height [ cm ]	Antenna Polarisation	Resolution Bandwidth [ MHz ]	Video Bandwidth [ MHz ]	Turntable position [ degrees ]
100 ~ 400	Horizontal, Vertical	1	3	0 ~ 345 (Step size: 15 degrees)

### Limits for radiated disturbance of ITE at a measurement distance of 3 m

Class	Limits [dB( $\mu\text{V/m}$ )]	
	Peak	Average
A	80	60
B	74	54
Average limit 500, 20 log 500 = 53.979 dB $\approx$ 54 dB		

Measurements within 6 dB of the limit were then maximized by adjusting turntable position. Final measurements were made using peak and rms-average detectors. Results checked manually; and points close to the limit line were re-measured.

## 5.2.1 Test instrumentation

EMC No.	Test Instrument	Model name	Manufacturer	Serial No.	Calibration	
					Date	Interval (Month)
E5I-015	EMI Test Receiver	ESU8	R&S	100481	2013-06-11	12
E5I-020	EMI Test Receiver	ESU40	R&S	100375	2013-06-13	12
E5I-036	Double-Ridged Waveguide Horn Antenna	HF907	R&S	100507	2013-04-02	24
E5I-069	BiLOG Antenna	CBL6112D	Teseq	35382	2013-05-21	24
E5I-070	BiLOG Antenna	CBL6112D	Teseq	35383	2013-05-22	24
E5I-073	Preamplifier	310N	Sonoma	332016	2013-06-10	12
E5I-074	Preamplifier	310N	Sonoma	332017	2013-06-10	12


## 5.2.2 Temperature and humidity condition

<b>Test date</b>	2013-07-26/ 2013-07-29	<b>Test engineer</b>	Jeong-Soo Kim
<b>Climate condition</b>	Ambient temperature	22.1 °C / 22.0 °C	Limit (15.0 to 35.0) °C
	Relative humidity	57.4 % R.H. / 58.6 % R.H.	Limit (25.0 to 75.0) % R.H.
	Atmospheric pressure	100.0 kPa / 99.9 kPa	Limit (86.0 to 106.0) kPa
<b>Test place</b>	Semi-Anechoic Chamber (SAC8)		

### 5.2.3 Test results

Operating Mode 1

**- Frequency range: 30 ~ 1 000 MHz**

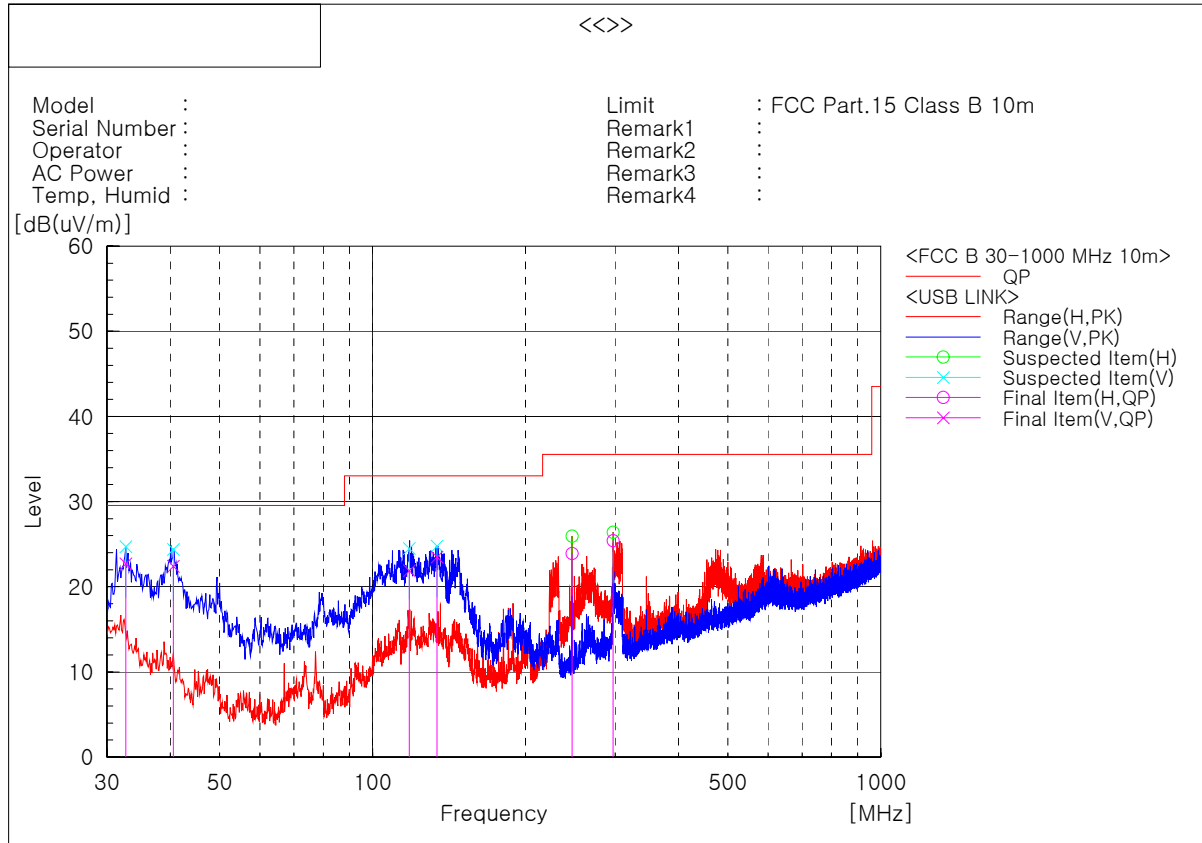

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	System
1	32.668	V	37.0	-14.3	22.7	29.5	6.8	99.9	225.7	2
2	40.549	V	40.9	-18.5	22.4	29.5	7.1	99.9	40.0	2
3	118.028	V	40.1	-18.2	21.9	33.0	11.1	99.9	56.6	2
4	133.911	V	42.2	-18.7	23.5	33.0	9.5	99.9	22.0	2
5	246.916	H	41.5	-17.6	23.9	35.5	11.6	300.1	171.9	1
6	297.478	H	41.5	-16.1	25.4	35.5	10.1	200.1	196.8	1

Note) Receiving antenna polarization : Horizontal, Vertical


Test Distance : 10 m, Antenna Height : 1 to 4 meters

Level (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit - Level (QP)

QP = Quasi-Peak

**- Frequency range: 1 000 ~ 11 500 MHz**

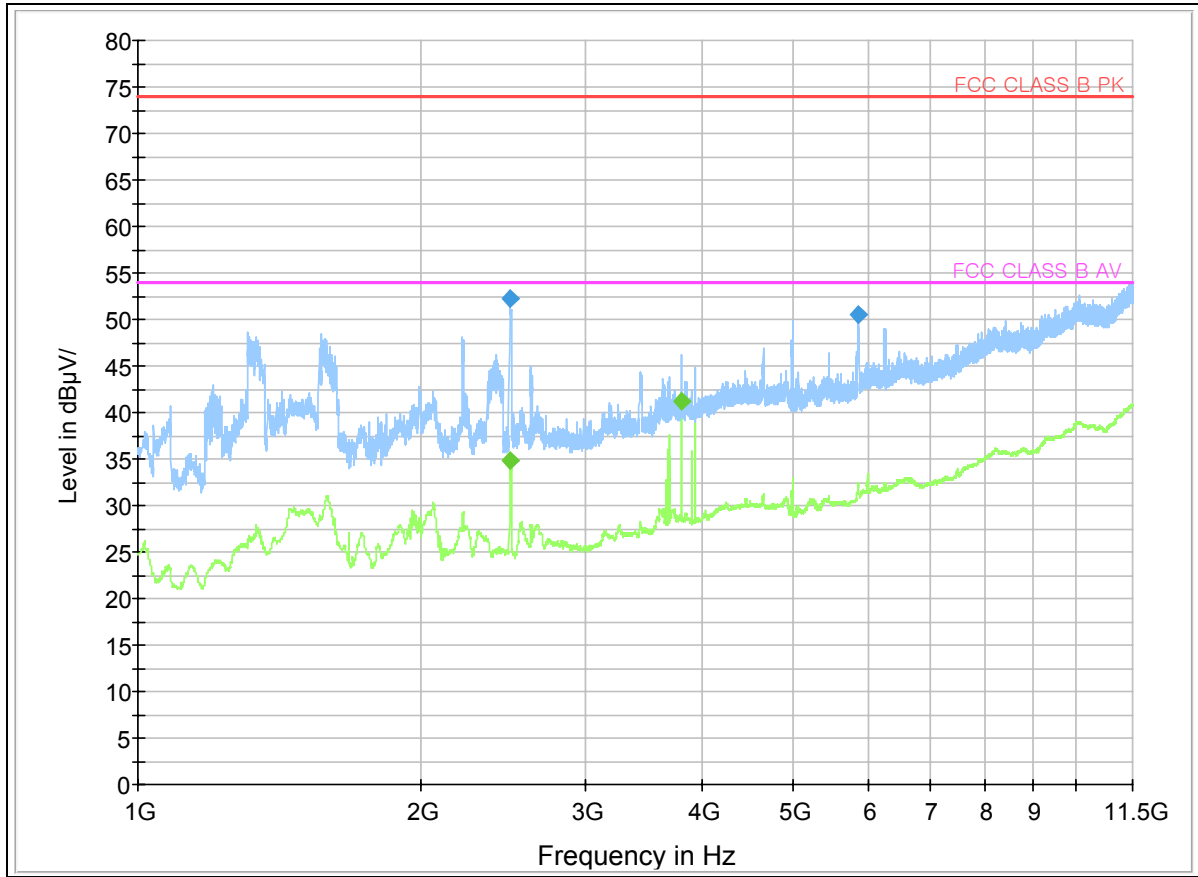

Frequency (MHz)	MaxPeak dB(µV/m)	Average dB(µV/m)	Limit dB(µV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2489.500	---	34.8	54.0	19.2	100.0	H	180.0	-2.1
2489.500	52.2	---	74.0	21.8	100.0	H	180.0	-2.1
3804.500	---	41.3	54.0	12.7	100.0	H	180.0	4.3
5868.500	50.5	---	74.0	23.5	100.0	H	0.0	10.0

Note) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters

Level (PK and/or AV) = Reading (PK and/or AV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or AV) = Limit – Level (PK and/or AV)

PK = Peak, AV = Average