




PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.290.6654
http://www.pctestlab.com



MEASUREMENT REPORT FCC Part 27 LTE

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro, Yeongtong-gu
Suwon-city, Gyeonggi-do, 443-803
Republic of Korea

Date of Testing:
August 9 - 17, 2013
Test Site/Location:
PCTEST Lab., Columbia, MD, USA
Test Report Serial No.:
0Y1307301506.A3L

FCC ID :	A3LSMN900V
APPLICANT:	SAMSUNG ELECTRONICS CO., LTD.

FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s): §2; §27
EUT Type: Portable Handset
Model(s): SM-N900V
Test Device Serial No.: *identical prototype* [S/N: LTE MAX, SVLTE]
Test Procedures: KDB 648474 D03 v01r01

Mode	Tx Frequency (MHz)	Emission Designator	Modulation	ERP/EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE Band 13	779.5 - 784.5	4M52G7W	QPSK	0.014	11.44
LTE Band 13	779.5 - 784.5	4M53W7W	16QAM	0.011	10.42
LTE Band 13	782	9M01G7W	QPSK	0.013	11.21
LTE Band 13	782	9M00W7W	16QAM	0.010	9.90
LTE Band 4	1712.5 - 1752.5	4M51G7W	QPSK	0.027	14.36
LTE Band 4	1712.5 - 1752.5	4M51W7W	16QAM	0.025	13.92
LTE Band 4	1715 - 1750	8M98G7W	QPSK	0.029	14.56
LTE Band 4	1715 - 1750	9M01W7W	16QAM	0.025	14.01
LTE Band 4	1717.5 - 1747.5	13M4G7W	QPSK	0.023	13.58
LTE Band 4	1717.5 - 1747.5	13M4W7W	16QAM	0.021	13.14
LTE Band 4	1720 - 1745	17M9G7W	QPSK	0.022	13.50
LTE Band 4	1720 - 1745	17M9W7W	16QAM	0.020	12.96

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested. I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Randy Ortanez
President




FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 1 of 68

T A B L E O F C O N T E N T S

FCC PART 27 MEASUREMENT REPORT		3
1.0 INTRODUCTION		4
1.1 SCOPE		4
1.2 TESTING FACILITY		4
2.0 PRODUCT INFORMATION.....		5
2.1 EQUIPMENT DESCRIPTION		5
2.2 DEVICE CAPABILITIES.....		5
2.3 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS		5
2.4 LABELING REQUIREMENTS.....		5
3.0 DESCRIPTION OF TESTS		6
3.1 MEASUREMENT PROCEDURE		6
3.1 BLOCK C FREQUENCY RANGE		6
3.2 AWS - BASE FREQUENCY BLOCKS		6
3.3 AWS - MOBILE FREQUENCY BLOCKS		6
3.4 OCCUPIED BANDWIDTH		7
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....		7
3.6 PEAK-AVERAGE RATIO		7
3.7 SVLTE.....		8
3.8 RADIATED POWER AND RADIATED SPURIOUS EMISSIONS		9
3.9 FREQUENCY STABILITY / TEMPERATURE VARIATION		10
4.0 TEST EQUIPMENT CALIBRATION DATA		11
5.0 SAMPLE CALCULATIONS		12
6.0 TEST RESULTS.....		13
6.1 SUMMARY.....		13
6.2 EFFECTIVE RADIATED POWER (ERP).....		14
6.3 EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)		15
6.4 BAND 13 RADIATED SPURIOUS EMISSIONS		16
BAND 13 RADIATED SPURIOUS EMISSIONS 1559 – 1610MHZ BAND.....		19
6.5 BAND 4 RADIATED SPURIOUS EMISSIONS		21
6.6 BAND 13 FREQUENCY STABILITY MEASUREMENTS.....		25
6.7 BAND 4 FREQUENCY STABILITY MEASUREMENTS.....		27
7.0 BAND 13 PLOTS OF EMISSIONS.....		29
8.0 BAND 4 PLOTS OF EMISSIONS.....		40
9.0 CONCLUSION.....		68

FCC ID: A3LSMN900V	 <small>ENGINEERING LABORATORY, INC.</small>	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 2 of 68



MEASUREMENT REPORT

FCC Part 27




§2.1033 General Information



APPLICANT: Samsung Electronics Co., Ltd.
APPLICANT ADDRESS: 129, Samsung-ro, Yeongtong-gu
 Suwon-city, Gyeonggi-do, 443-803, Republic of Korea
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 7185 Oakland Mills Road, Columbia, MD 21045 USA
FCC RULE PART(S): §2; §27
BASE MODEL: SM-N900V
FCC ID: A3LSMN900V
FCC CLASSIFICATION: PCS Licensed Transmitter Held to Ear (PCE)
FREQUENCY TOLERANCE: ±0.00025 % (2.5 ppm)
Test Device Serial No.: LTE MAX, SVLTE Production Pre-Production Engineering
DATE(S) OF TEST: August 9 - 17, 2013
TEST REPORT S/N: 0Y1307301506.A3L

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset	Page 3 of 68	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on February 15, 2012.

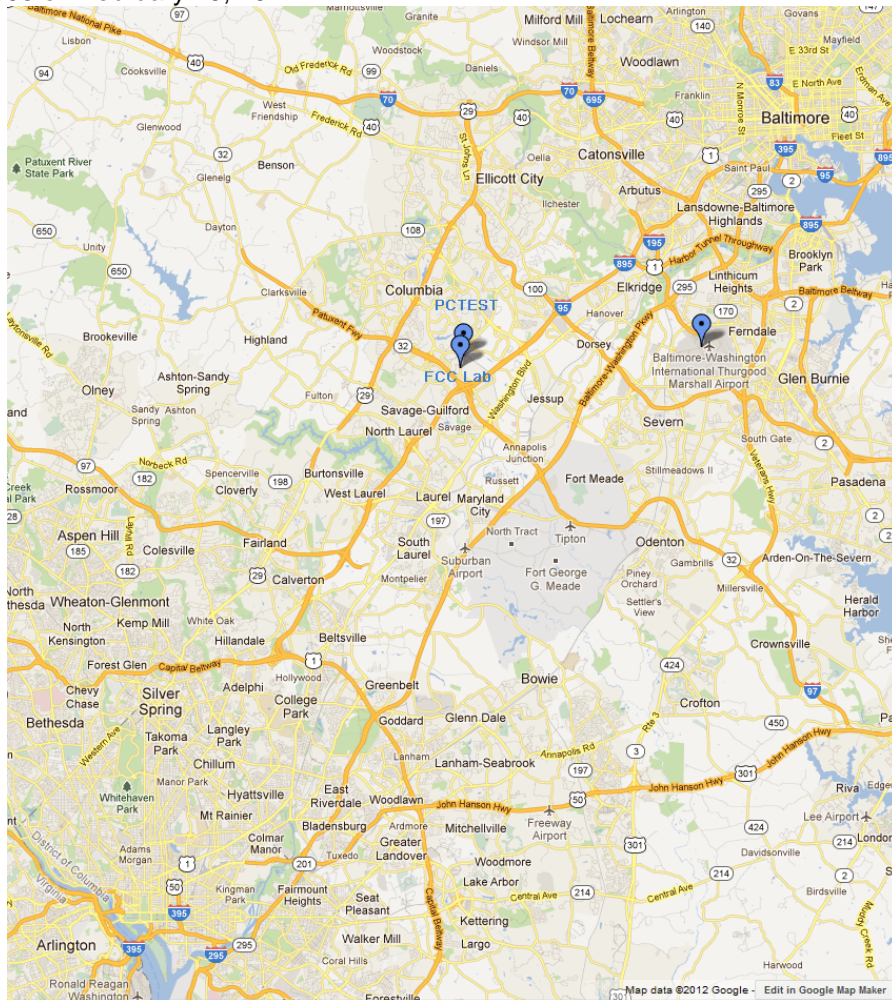


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 4 of 68

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMN900V**. The test data contained in this report pertains only to the emissions due to the EUT's LTE function.

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 CDMA/EvDO Rev0/A (BC0, BC1), 850/1900 GSM/GPRS/EDGE, 850/1900 WCDMA/HSPA, Band 13, 4 LTE (w/ SVLTE), 802.11a/b/g/n/ac WLAN (DTS/NIJ), Bluetooth (1x,EDR, LE), NFC, ANT+

2.3 Test Configuration

The Samsung Portable Handset FCC ID: A3LSMN900V was tested per the guidance of ANSI/TIA-603-C-2004 and KDB 971168 v02r01. This device supports a wireless charging cover. Additional emissions testing was performed per KDB 648474 D03 and the additional worst case emissions are reported herein and identified as WCC.

Per KDB 648474 D03 v01r01, spurious emissions measurement data was also investigated with the wireless charging battery cover (WCC). The handset was placed on the representative charging pad under normal conditions and simulated call configuration. Only worst case emissions are shown in this report.



2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

2.5 Labeling Requirements

Per 2.925

The FCC identifier shall be permanently affixed to the equipment and shall be readily visible to the purchaser at the time of purchase.

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset	Page 5 of 68	

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-C-2004) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168) were used in the measurement of the **Samsung Portable Handset FCC ID: A3LSMN900V**.


3.1 Block C Frequency Range

§27.5(b)(3)

Two paired channels of 11 megahertz each are available for assignment in Block C in the 746-757 MHz and 776-787 MHz bands. In the event that no licenses for two channels in this Block C are assigned based on the results of the first auction in which such licenses were offered because the auction results do not satisfy the applicable reserve price, the spectrum in the 746-757 MHz and 776-787 MHz bands will instead be made available for assignment at a subsequent auction as follows: (i) Two paired channels of 6 megahertz each available for assignment in Block C1 in the 746-752 MHz and 776-782 MHz bands. (ii) Two paired channels of 5 megahertz each available for assignment in Block C2 in the 752-757 MHz and 782-787 MHz bands.


3.2 AWS - Base Frequency Blocks

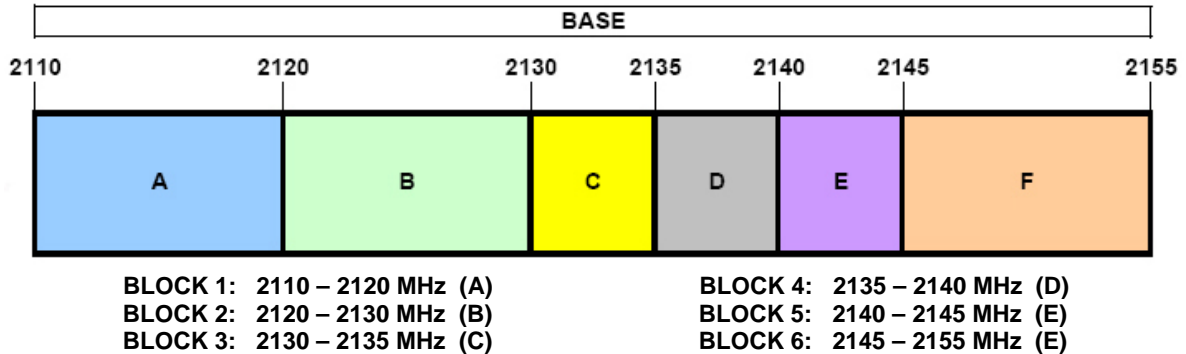

§27.5(h)



3.3 AWS - Mobile Frequency Blocks

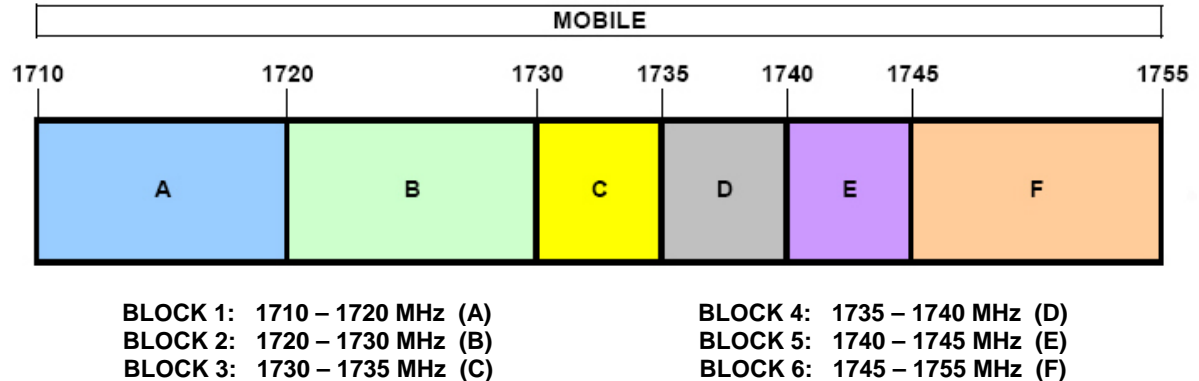§27.5(h)



FCC ID: A3LSMN900V	 FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset	Page 6 of 68

3.4 Occupied Bandwidth

§2.1049 RSS-139(2.3)

The implementation of this test is performed by the spectrum analyzer's occupied bandwidth function. The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

3.5 Spurious and Harmonic Emissions at Antenna Terminal



§2.1051 §27.53(f) §27.53(c.5) §27.53(h) RSS-139(6.5.1)

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for 776-788 MHz band, or 1 MHz or greater for AWS band. However, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30kHz may be employed for 776-788MHz band. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed for AWS band. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

3.6 Peak-Average Ratio

§27.50(d.5) RSS-139(6.4)

A peak to average ratio measurement is performed at the conducted port of the EUT. For LTE signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

FCC ID: A3LSMN900V	 FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 7 of 68

3.7 SVLTE



§2.1053 §22.917(a) §24.238(a) §27.53(f) §27.53(h) RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)

This device is capable of operating in SVLTE mode in the following cases:

Simultaneous Transmit Configurations	
1X CDMA 850 Voice	+ LTE 782 MHz Data
1X CDMA 1900 Voice	+ LTE 782 MHz Data
1X CDMA 850 Voice	+ LTE 1732 MHz Data
1X CDMA 1900 Voice	+ LTE 1732 MHz Data

Table 3-1. SVLTE Transmit Configurations

All modes of SVLTE operation were investigated. It was determined that this device did not produce any intermodulation products that were within 25dB of the spurious emission limit so the emissions are not reported herein.

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset	Page 8 of 68	

3.8 Radiated Power and Radiated Spurious Emissions

§2.1053 §27.50(b.10) §27.50(d.4) §27.53(f) RSS-139(6.5.1)

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A ¾" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.



The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions' occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168.

Per the guidance of ANSI/TIA-603-C-2004, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power}_{\text{[Watts]}})$.

FCC ID: A3LSMN900V	 FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 9 of 68

3.9 Frequency Stability / Temperature Variation

§2.1055 §27.5(b) §27.5(h) §27.54 RSS-139(6.3)



The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block for Part 27.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A sufficient stabilization period at each temperature shall be used prior to each frequency requirement.

FCC ID: A3LSMN900V	 FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 10 of 68

4.0 TEST EQUIPMENT CALIBRATION DATA



Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTX1	Licensed Transmitter Cable Set	1/17/2013	Annual	1/17/2014	N/A
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	3/29/2013	Annual	3/29/2014	N/A
Agilent	8447D	Broadband Amplifier	5/31/2013	Annual	5/31/2014	2443A01900
Agilent	N9020A	MXA Signal Analyzer	10/9/2012	Annual	10/9/2013	US46470561
Agilent	N5183A	MXG Analog Signal Generator	1/6/2013	Annual	1/6/2014	MY50141900
Agilent	N9030A	PXA Signal Analyzer (44GHz)	1/11/2013	Annual	1/11/2014	MY52350166
Agilent	87405C	Pre-amplifier (0.1 - 18 GHz)	3/11/2013	Annual	3/11/2014	MY53010007
Espec	ESX-2CA	Environmental Chamber	4/16/2013	Annual	4/16/2014	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	7/24/2013	Biennial	7/24/2015	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	5/30/2012	Biennial	5/30/2014	135427
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	11/7/2012	Biennial	11/7/2014	128338
Mini-Circuits	VHF-1200+	High Pass Filter	1/17/2013	Annual	1/17/2014	30923
Mini-Circuits	VHF-3100+	High Pass Filter	1/17/2013	Annual	1/17/2014	30841
Mini-Circuits	PWR-SENS-4RMS	USB Power Sensor	4/17/2013	Annual	4/17/2014	11210140001
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	N/A		N/A	100976
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	5/31/2013	Annual	5/31/2014	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	5/31/2013	Annual	5/31/2014	100040
Rohde & Schwarz	ESU26	EMI Test Receiver	2/25/2013	Annual	2/25/2014	100342
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	11/14/2011	Biennial	11/14/2013	9105-2404
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Tx	11/14/2011	Biennial	11/14/2013	9105-2403
Seekonk	NC-100	Torque Wrench (8" lb)	3/5/2012	Triennial	3/5/2015	N/A
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/26/2012	Biennial	1/26/2014	A051107

Table 4-1. Test Equipment

Notes:

Equipment used for signaling with a calibration date of "N/A" shown in this list was only used for maintaining a link between the piece of equipment and the EUT. This equipment was not used to make direct calibrated measurements.

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset	Page 11 of 68	

5.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz
 G = Phase Modulation
 7 = Quantized/Digital Info
 D = Amplitude/Angle Modulated

16QAM Modulation



Emission Designator = 8M45W7D

LTE BW = 8.45 MHz
 W = Combination (Audio/Data)
 7 = Quantized/Digital Info
 D = Amplitude/Angle Modulated

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80).

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 12 of 68

6.0 TEST RESULTS

6.1 Summary



Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMN900V
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): LTE

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Result	Reference
TRANSMITTER MODE (TX)					
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section, 7.0, 8.0
2.1051 27.53(f) 27.53(h)	Band Edge / Conducted Spurious Emissions	$> 43 + 10\log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions		PASS	Section, 7.0, 8.0
27.50(d.5)	Peak-Average Ratio	< 13 dB		PASS	Section 8.0
2.1046	Transmitter Conducted Output Power	N/A		PASS	See RF Exposure Report
27.50(b.10)	Effective Radiated Power (Band 13)	< 3 Watts max. ERP	RADIATED	PASS	Section 6.2
27.50(d.4)	Equivalent Isotropic Radiated Power (Band 4)	< 1 Watts max. EIRP		PASS	Section 6.3
2.1053 27.53(f) 27.53(h)	Undesirable Emissions	$> 43 + 10\log_{10}(P[\text{Watts}])$ for all out-of-band emissions		PASS	Section, 6.4, 6.5
2.1055. 27.5(b) 27.54	Frequency Stability	Fundamental emissions must stay within authorized frequency block		PASS	Section, 6.6, 6.7

Table 6-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 7.0 8.0 were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset	Page 13 of 68	

6.2 Effective Radiated Power (ERP)



§27.50(b.10)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]	Margin [dB]
779.50	5	QPSK	Standard	1 / 12	7.68	3.76	V	11.44	0.014	-23.33
782.00	5	QPSK	Standard	1 / 0	7.46	3.81	V	11.27	0.013	-23.50
784.50	5	QPSK	Standard	1 / 0	5.78	3.85	V	9.63	0.009	-25.14
779.50	5	16QAM	Standard	1 / 12	6.66	3.76	V	10.42	0.011	-24.35
782.00	5	16QAM	Standard	1 / 0	6.34	3.81	V	10.15	0.010	-24.62
784.50	5	16QAM	Standard	1 / 0	4.66	3.85	V	8.51	0.007	-26.26
782.00	10	QPSK	Standard	1 / 0	7.40	3.81	V	11.21	0.013	-23.56
782.00	10	16QAM	Standard	1 / 0	6.09	3.81	V	9.90	0.010	-24.87

Table 6-2. ERP Data (Band 13)

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. The worst case RB size/offset configurations are shown in the table above.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the V position. The data reported in the table above was measured in this test setup.

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset	Page 14 of 68	

6.3 Equivalent Isotropic Radiated Power (EIRP)



§27.50(d.4) RSS-139(6.4)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	Margin [dB]
1712.50	5	QPSK	Standard	1 / 0	4.47	9.89	H2	14.36	0.027	-15.64
1732.50	5	QPSK	Standard	1 / 12	2.20	9.85	H2	12.05	0.016	-17.95
1752.50	5	QPSK	Standard	1 / 0	0.83	9.80	H2	10.63	0.012	-19.37
1712.50	5	16-QAM	Standard	1 / 0	4.03	9.89	H2	13.92	0.025	-16.08
1732.50	5	16-QAM	Standard	1 / 12	1.84	9.85	H2	11.69	0.015	-18.31
1752.50	5	16-QAM	Standard	1 / 0	0.29	9.80	H2	10.09	0.010	-19.91
1715.00	10	QPSK	Standard	1 / 0	4.67	9.89	H2	14.56	0.029	-15.44
1732.50	10	QPSK	Standard	1 / 49	2.43	9.85	H2	12.28	0.017	-17.72
1750.00	10	QPSK	Standard	1 / 0	1.68	9.80	H2	11.48	0.014	-18.52
1715.00	10	16-QAM	Standard	1 / 0	4.12	9.89	H2	14.01	0.025	-15.99
1732.50	10	16-QAM	Standard	1 / 49	2.09	9.85	H2	11.94	0.016	-18.06
1750.00	10	16-QAM	Standard	1 / 0	0.79	9.80	H2	10.59	0.011	-19.41
1717.50	15	QPSK	Standard	1 / 0	3.69	9.89	H2	13.58	0.023	-16.42
1732.50	15	QPSK	Standard	1 / 0	2.17	9.85	H2	12.02	0.016	-17.98
1747.50	15	QPSK	Standard	1 / 0	2.20	9.80	H2	12.00	0.016	-18.00
1717.50	15	16-QAM	Standard	1 / 0	3.25	9.89	H2	13.14	0.021	-16.86
1732.50	15	16-QAM	Standard	1 / 0	1.52	9.85	H2	11.37	0.014	-18.63
1747.50	15	16-QAM	Standard	1 / 0	1.53	9.80	H2	11.33	0.014	-18.67
1720.00	20	QPSK	Standard	1 / 0	3.61	9.89	H2	13.50	0.022	-16.50
1732.50	20	QPSK	Standard	1 / 0	2.69	9.85	H2	12.54	0.018	-17.46
1745.00	20	QPSK	Standard	1 / 50	2.43	9.80	H2	12.23	0.017	-17.77
1720.00	20	16-QAM	Standard	1 / 0	3.07	9.89	H2	12.96	0.020	-17.04
1732.50	20	16-QAM	Standard	1 / 0	2.05	9.85	H2	11.90	0.015	-18.10
1745.00	20	16-QAM	Standard	1 / 50	1.95	9.80	H2	11.75	0.015	-18.25

Table 6-3. EIRP Data (Band 4)

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. The worst case RB size/offset configurations are shown in the table above.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case configuration was found in the H2 position. The data reported in the table above was measured in this test setup.

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset	Page 15 of 68	

6.4 Band 13 Radiated Spurious Emissions §2.1053 §27.53(f)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 779.50 MHz
 MEASURED OUTPUT POWER: 11.44 dBm = 0.014 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 24.44 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1559.00	-50.21	5.84	-44.38	H2	55.82
2338.50	-82.14	5.79	-76.35	H2	87.80
3118.00	-81.07	7.23	-73.84	H2	85.28
3897.50	-80.74	8.49	-72.25	H2	83.70
4677.00	-80.51	9.46	-71.05	H2	82.50
5456.50	-79.98	10.44	-69.54	H2	80.98

Table 6-4. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. The worst case RB size/offset configuration was found with RB size 1 and offset 0.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the H2 position. The data reported in the table above was measured in this test setup.

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset	Page 16 of 68	

Band 13 Radiated Spurious Measurements (continued)
§2.1053 §27.53(f)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 782.00 MHz
 MEASURED OUTPUT POWER: 11.27 dBm = 0.013 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 24.27 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
2346.00	-82.09	5.78	-76.31	H2	87.58
3128.00	-81.13	7.26	-73.87	H2	85.14
3910.00	-80.76	8.53	-72.23	H2	83.50
4692.00	-80.52	9.49	-71.03	H2	82.30
5474.00	-79.98	10.46	-69.52	H2	80.78

Table 6-5. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. The worst case RB size/offset configuration was found with RB size 1 and offset 12.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the H2 position. The data reported in the table above was measured in this test setup.

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset	Page 17 of 68	

Band 13 Radiated Spurious Measurements (continued)
§2.1053 §27.53(f)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 784.50 MHz
 MEASURED OUTPUT POWER: 9.63 dBm = 0.009 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 22.63 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1569.00	-50.64	5.89	-44.75	H2	54.38
2353.50	-82.03	5.77	-76.26	H2	85.89
3138.00	-81.19	7.28	-73.91	H2	83.54
3922.50	-80.79	8.58	-72.22	H2	81.85
4707.00	-80.52	9.52	-71.00	H2	80.64
5491.50	-79.98	10.49	-69.49	H2	79.13

Table 6-6. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. The worst case RB size/offset configuration was found with RB size 1 and offset 0.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the H2 position. The data reported in the table above was measured in this test setup.

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset	Page 18 of 68	

Band 13 Radiated Spurious Emissions 1559 – 1610MHz Band
§2.1053 §27.53(f)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 782 / 784.5 MHz
 MEASURED OUTPUT POWER: 11.27 / 9.63 dBm = 0.013 / 0.009 W
 MODULATION SIGNAL: QPSK
 DISTANCE: 3 meters
 NARROWBAND EMISSION LIMIT: -50 dBm
 WIDEBAND EMISSION LIMIT: -40 dBm/MHz

FREQUENCY (MHz)	EMISSION TYPE	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	MARGIN (dB)
1564.00	WIDEBAND	-49.66	5.86	-43.79	H2	-3.79
1569.00	WIDEBAND	-50.64	5.89	-44.75	H2	-4.75

Table 6-7. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. The worst case RB size/offset configuration was found with RB size 1 and offset 12.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case configuration was found in the H2 position. The data reported in the table above was measured in this test setup.

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset	Page 19 of 68	

Band 13 Radiated Spurious Emissions 1559 – 1610MHz Band
§2.1053 §27.53(f)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 782.00 MHz
 MEASURED OUTPUT POWER: 11.267 dBm = 0.013 W
 MODULATION SIGNAL: QPSK
 DISTANCE: 3 meters
 NARROWBAND EMISSION LIMIT: -50 dBm
 WIDEBAND EMISSION LIMIT: -40 dBm/MHz

FREQUENCY (MHz)	EMISSION TYPE	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	MARGIN (dB)
1564.00	WIDEBAND	-60.87	5.86	-55.01	H	-15.01

Table 6-8. Radiated Spurious Data with WCC

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. The worst case RB size/offset configuration was found with RB size 1 and offset 12.
2. This unit was tested with its standard battery. The unit was tested with the wireless charging battery cover. The handset was placed on the representative charging pad. Worst case emissions are shown in the table above.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset	Page 20 of 68	

6.5 Band 4 Radiated Spurious Emissions

§2.1053 §27.53(h) RSS-139(6.5.1)

Field Strength of SPURIOUS Radiation


OPERATING FREQUENCY: 1715.00 MHz
 MEASURED OUTPUT POWER: 14.56 dBm = 0.029 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 27.56 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3430.00	-58.72	8.11	-50.60	H	65.16
5145.00	-81.85	10.13	-71.72	H	86.28
6860.00	-80.53	11.31	-69.22	H	83.78
8575.00	-79.89	12.98	-66.91	H	81.47
10290.00	-77.26	13.22	-64.04	H	78.60
12005.00	-73.88	13.01	-60.87	H	75.43

Table 6-9. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. The worst case RB size/offset configuration was found with RB size 1 and offset 0.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset	Page 21 of 68	

Band 4 Radiated Spurious Measurements (continued)
§2.1053 §27.53(h) RSS-139(6.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1732.50 MHz
 MEASURED OUTPUT POWER: 12.28 dBm = 0.017 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 25.28 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3465.00	-58.05	8.23	-49.82	H	62.10
5197.50	-81.77	10.18	-71.58	H	83.86
6930.00	-80.38	11.41	-68.96	H	81.24
8662.50	-79.77	13.00	-66.77	H	79.05
10395.00	-77.18	13.15	-64.03	H	76.31
12127.50	-73.57	13.00	-60.57	H	72.85

Table 6-10. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. The worst case RB size/offset configuration was found with RB size 1 and offset 49.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset	Page 22 of 68	

Band 4 Radiated Spurious Measurements (continued)
§2.1053 §27.53(h) RSS-139(6.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1750.00 MHz
 MEASURED OUTPUT POWER: 11.48 dBm = 0.014 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 24.48 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3500.00	-59.49	8.32	-51.17	H	62.66
5250.00	-81.63	10.20	-71.43	H	82.92
7000.00	-80.19	11.48	-68.71	H	80.20
8750.00	-79.54	12.97	-66.57	H	78.06
10500.00	-76.84	13.04	-63.79	H	75.28
12250.00	-73.37	13.03	-60.34	H	71.82

Table 6-11. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. The worst case RB size/offset configuration was found with RB size 1 and offset 0.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset	Page 23 of 68	

Band 4 Radiated Spurious Measurements (continued)
§2.1053 §27.53(h) RSS-139(6.5.1)

Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1732.50 MHz
 MEASURED OUTPUT POWER: 12.28 dBm = 0.017 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 25.28 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3465.00	-58.16	8.23	-49.93	H	62.21
5197.50	-81.77	10.18	-71.58	H	83.86
6930.00	-80.38	11.41	-68.96	H	81.24
8662.50	-79.77	13.00	-66.77	H	79.05
10395.00	-77.18	13.15	-64.03	H	76.31
12127.50	-73.57	13.00	-60.57	H	72.85

Table 6-12. Radiated Spurious Data with WCC

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. The worst case RB size/offset configuration was found with RB size 1 and offset 49.
2. This unit was tested with its standard battery. The unit was tested with the wireless charging battery cover. The handset was placed on the representative charging pad. Worst case emissions are shown in this test report.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset	Page 24 of 68	

6.6 Band 13 Frequency Stability Measurements

§2.1055 §27.5(b) §27.54



OPERATING FREQUENCY: 782,000,000 Hz
 CHANNEL: 23230
 REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (° C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	781,999,986	-14	-0.0000018
100 %		- 30	781,999,993	-7	-0.0000009
100 %		- 20	781,999,991	-9	-0.0000012
100 %		- 10	781,999,999	-1	-0.0000001
100 %		0	781,999,990	-10	-0.0000013
100 %		+ 10	781,999,990	-10	-0.0000013
100 %		+ 20	782,000,002	2	0.0000003
100 %		+ 30	781,999,998	-2	-0.0000003
100 %		+ 40	782,000,000	0	0.0000000
100 %		+ 50	781,999,991	-9	-0.0000012
115 %		4.37	+ 20	782,000,003	3
BATT. ENDPOINT	3.40	+ 20	782,000,001	1	0.0000001

Table 6-13. Frequency Stability Data (Band 13)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset	Page 25 of 68	

Band 13 Frequency Stability Measurements (Cont'd)
§2.1055 §27.5(b) §27.54

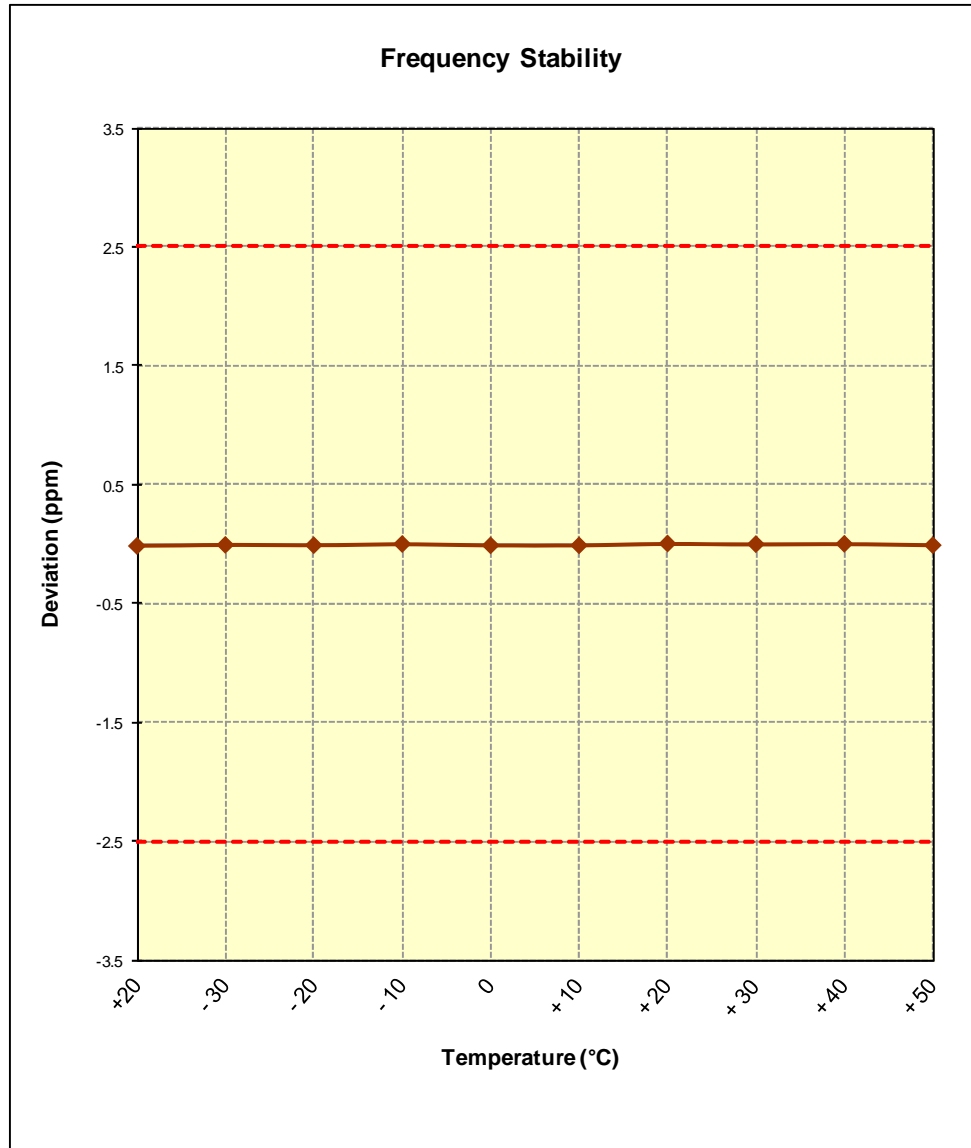




Figure 6-1. Frequency Stability Graph (Band 13)

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 26 of 68

6.7 Band 4 Frequency Stability Measurements

§2.1055 §27.54 RSS-139(6.3)



OPERATING FREQUENCY: 1,732,500,000 Hz
 CHANNEL: 20175
 REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (° C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,732,499,992	-8	-0.0000005
100 %		- 30	1,732,499,996	-4	-0.0000002
100 %		- 20	1,732,500,000	0	0.0000000
100 %		- 10	1,732,499,993	-7	-0.0000004
100 %		0	1,732,499,997	-3	-0.0000002
100 %		+ 10	1,732,499,999	-1	-0.0000001
100 %		+ 20	1,732,499,998	-2	-0.0000001
100 %		+ 30	1,732,499,987	-13	-0.0000008
100 %		+ 40	1,732,499,993	-7	-0.0000004
100 %		+ 50	1,732,499,991	-9	-0.0000005
115 %	4.37	+ 20	1,732,499,987	-13	-0.0000008
BATT. ENDPOINT	3.40	+ 20	1,732,499,989	-11	-0.0000006

Table 6-14. Frequency Stability Data (Band 4)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset	Page 27 of 68	

Band 4 Frequency Stability Measurements (Cont'd)
§2.1055 §§27.54 RSS-139(6.3)

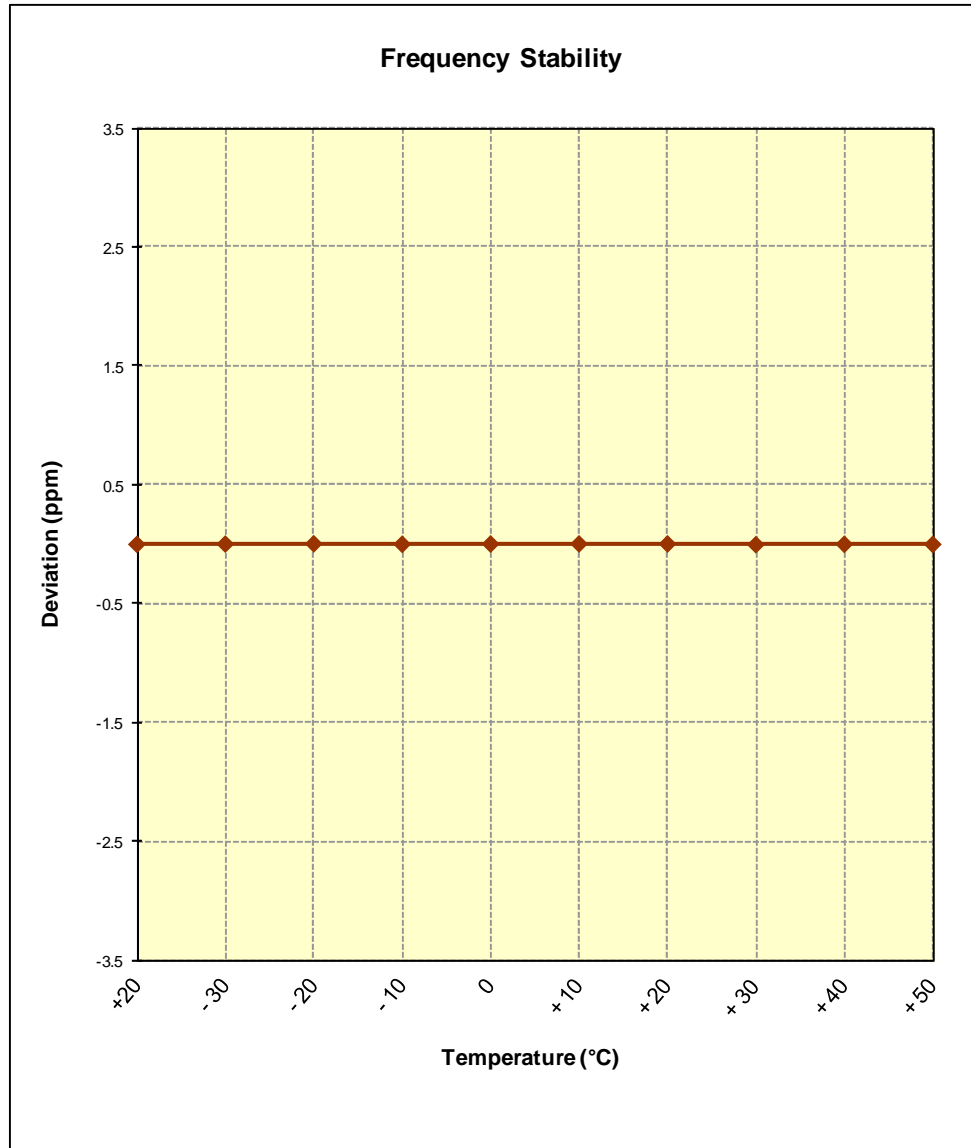





Figure 6-2. Frequency Stability Graph (Band 4)

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 28 of 68

7.0 BAND 13 PLOTS OF EMISSIONS


Note: All bandwidths, RB configurations, and modulations were investigated. The worst case test results are reported below.

For all plots in Section 7.0 showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit is $65 + 10\log_{10}(P_{[Watts]}) = -35\text{dBm}$ in a 6.25kHz bandwidth. Since it was not possible to set the resolution bandwidth to 6.25kHz with the available equipment, a bandwidth of 10kHz was used instead to show compliance. By using a 10kHz bandwidth, the limit was adjusted by $10\log_{10}(10\text{kHz}/6.25\text{kHz}) = 2.04\text{dB}$. Thus, the limit shown in all plots in the 763 – 775MHz and 793 – 805MHz bands for all available modulation types was $-35\text{dBm} + 2.04\text{dB} = -32.96\text{dBm}$.

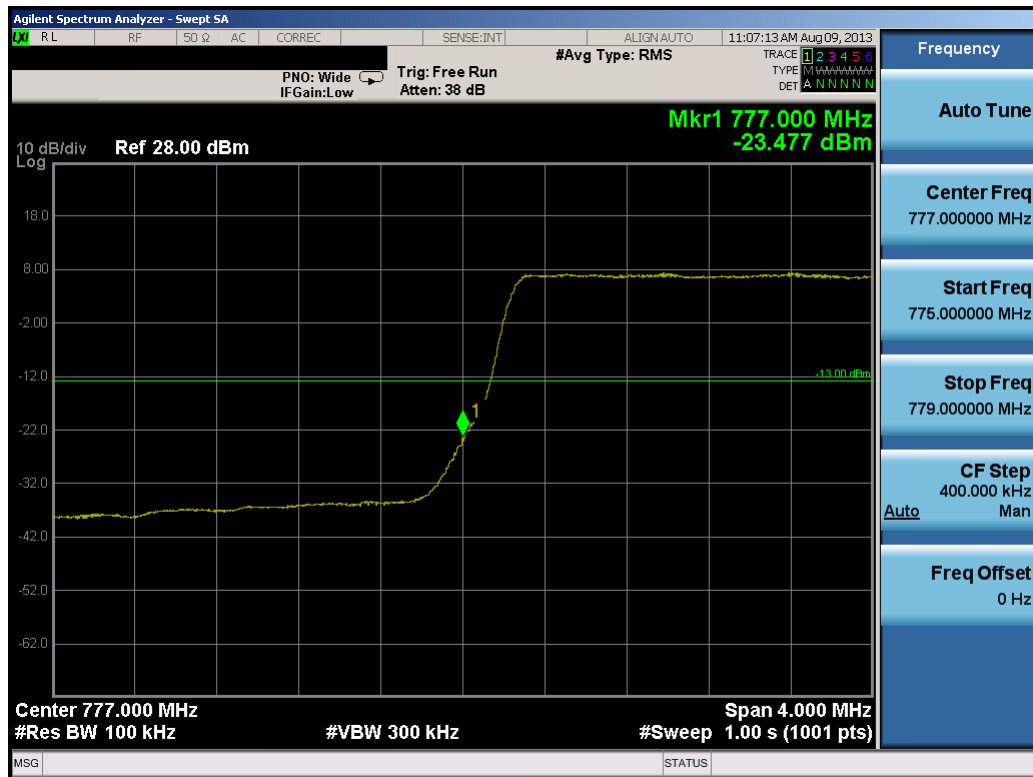


Plot 7-1. Lower Band Edge Plot (5.0MHz QPSK – RB Size 25)

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 29 of 68

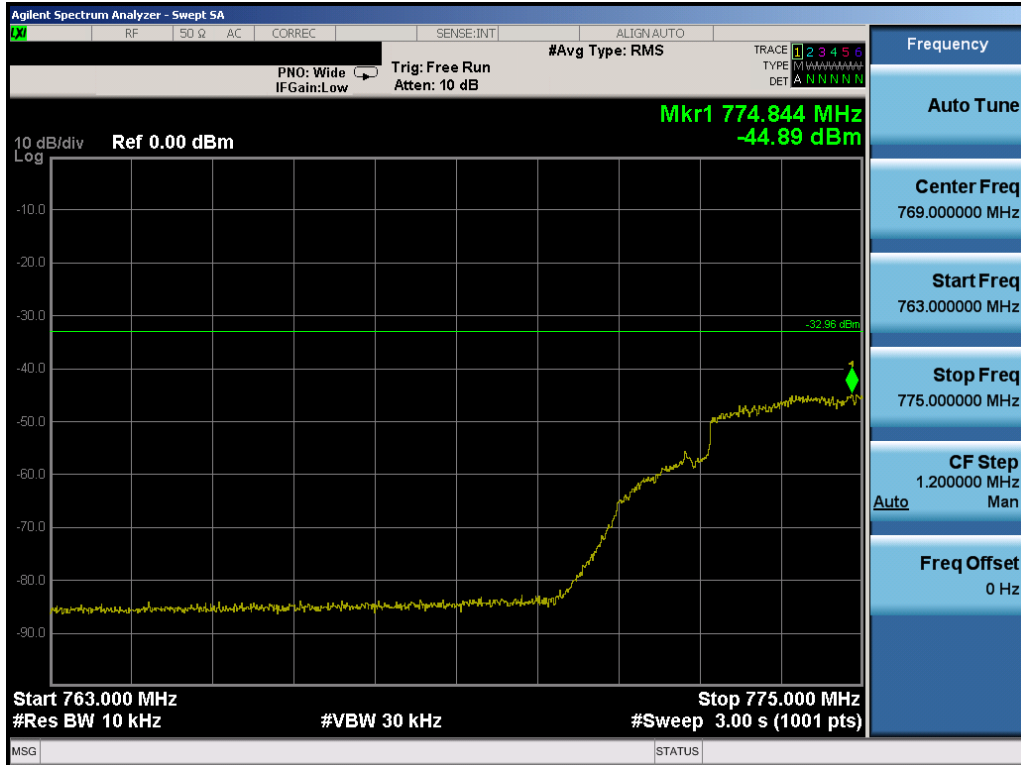


Plot 7-2. Lower Emission Mask Plot (5.0MHz QPSK – RB Size 25)

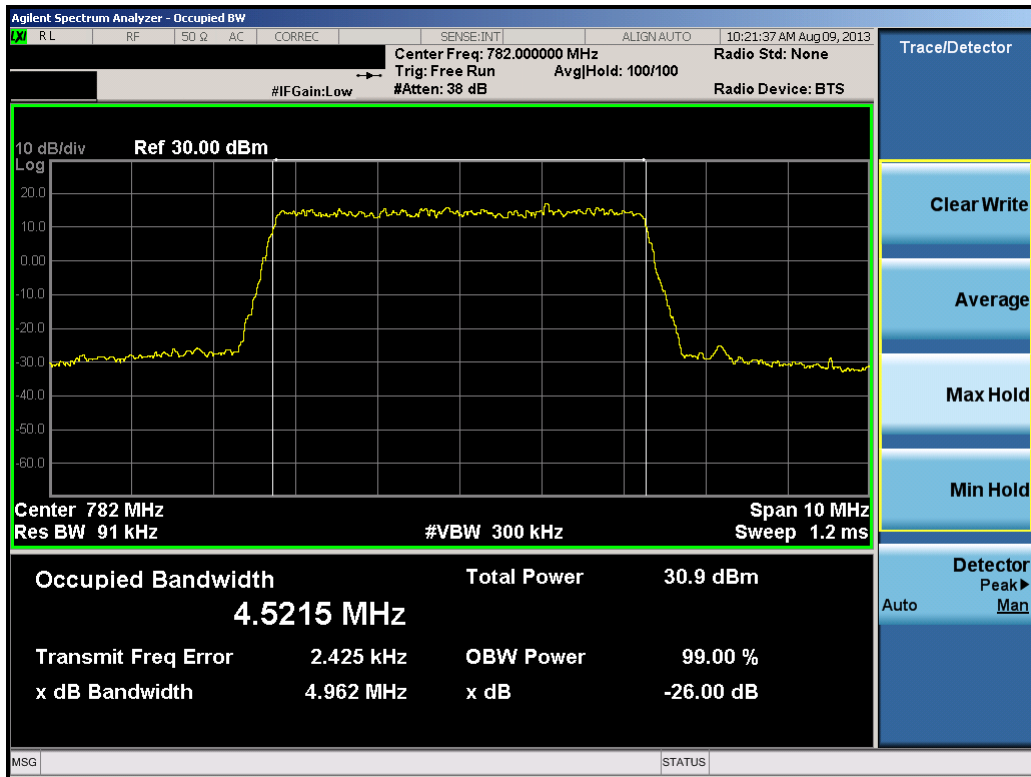


Plot 7-3. Occupied Bandwidth Plot (5.0MHz QPSK – RB Size 25)

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 30 of 68

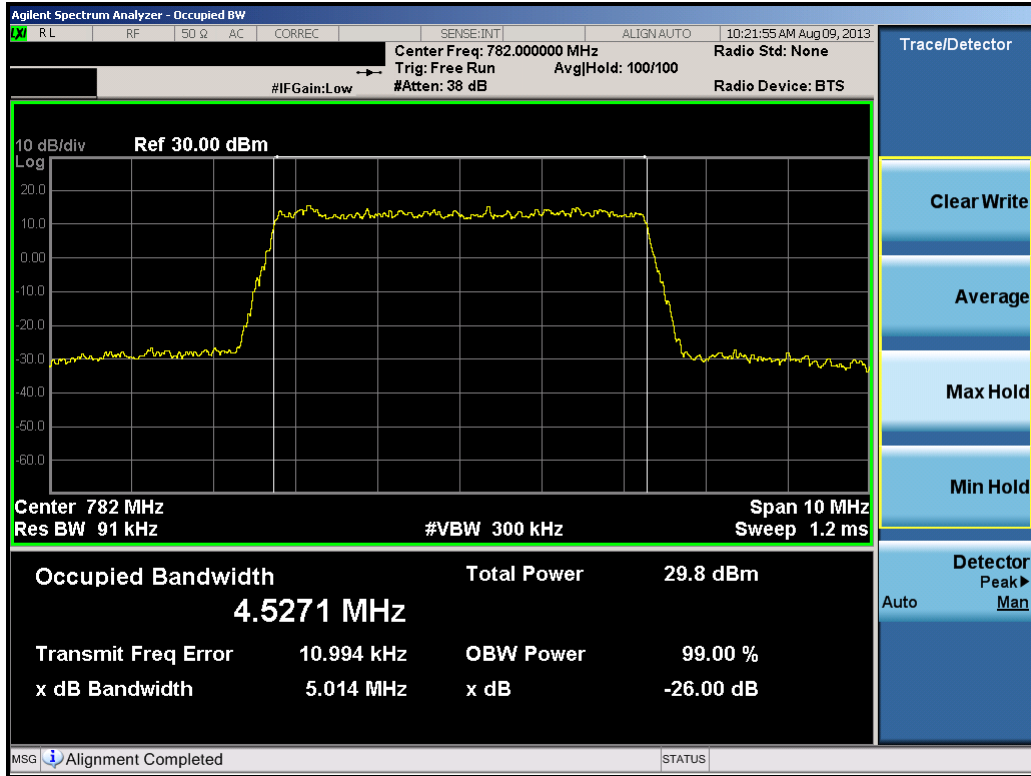


Plot 7-4. Occupied Bandwidth Plot (5.0MHz 16-QAM – RB Size 25)

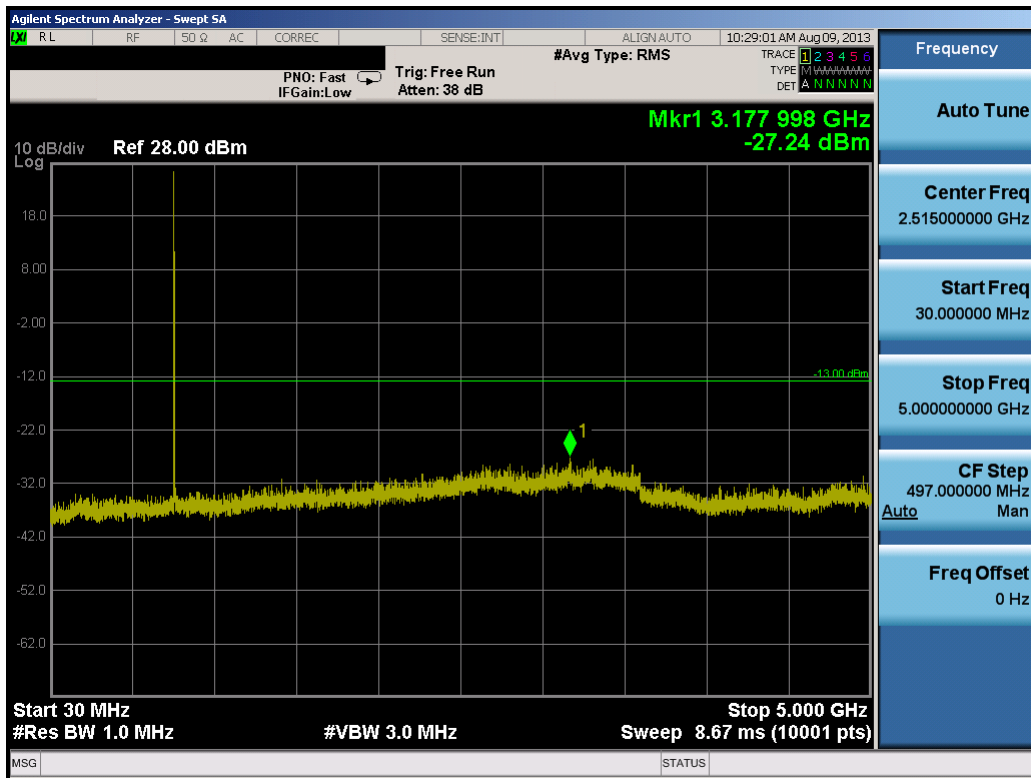


Plot 7-5. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: A3LSMN900V	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 31 of 68

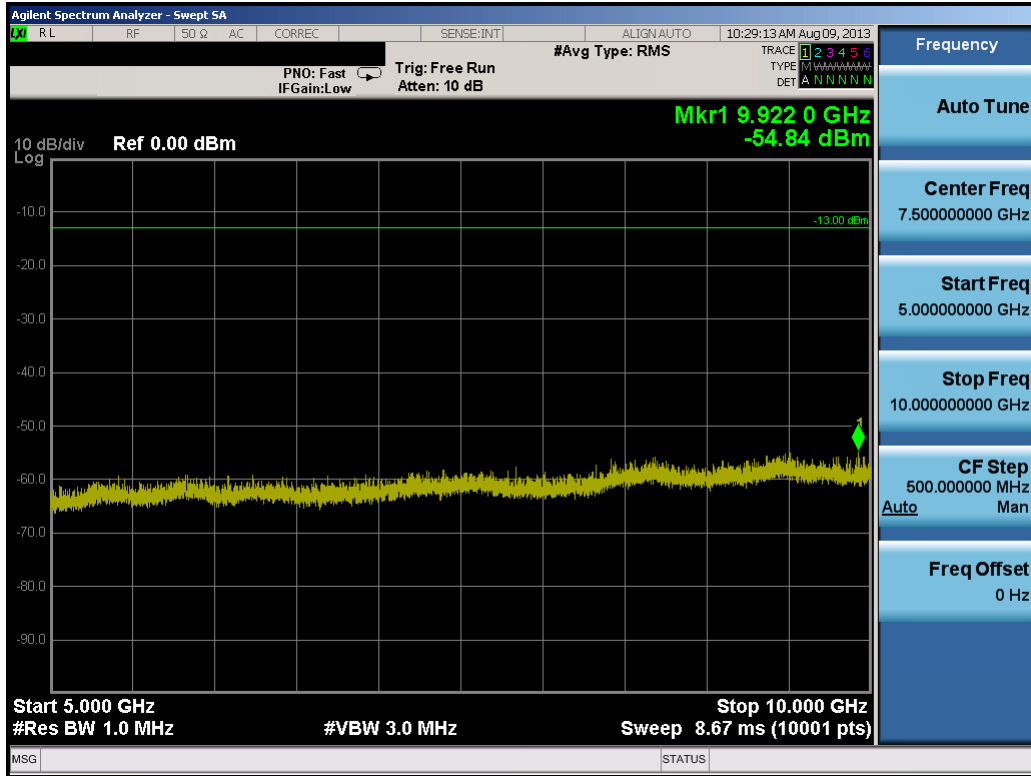


Plot 7-6. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

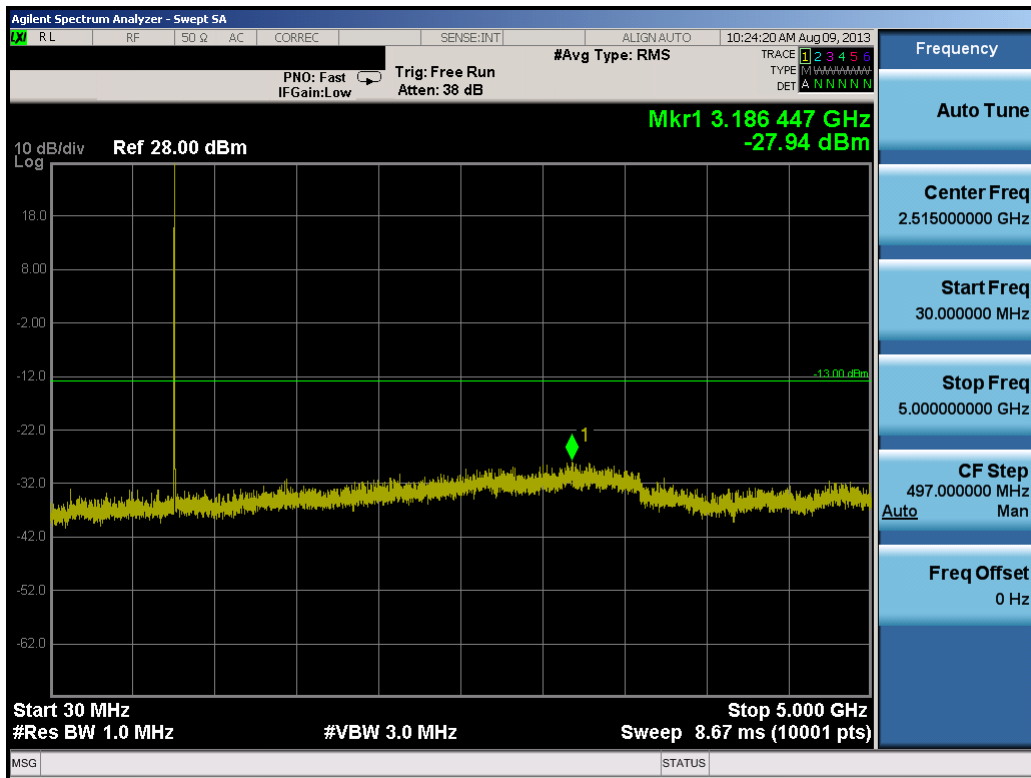


Plot 7-7. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 32 of 68

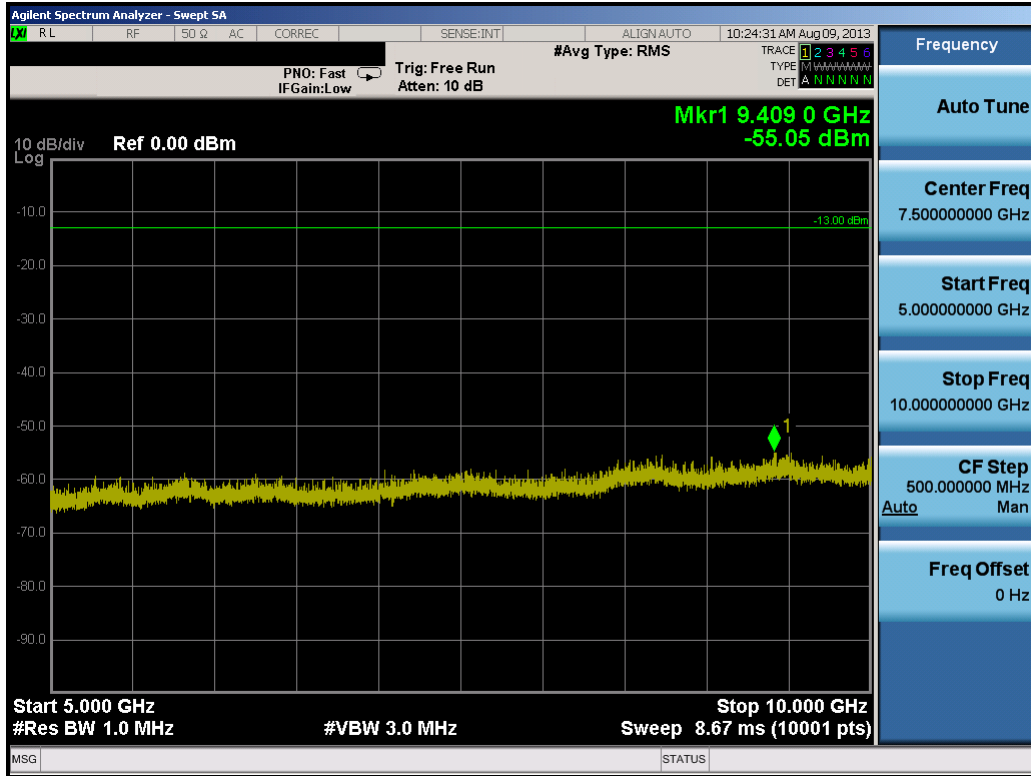


Plot 7-8. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

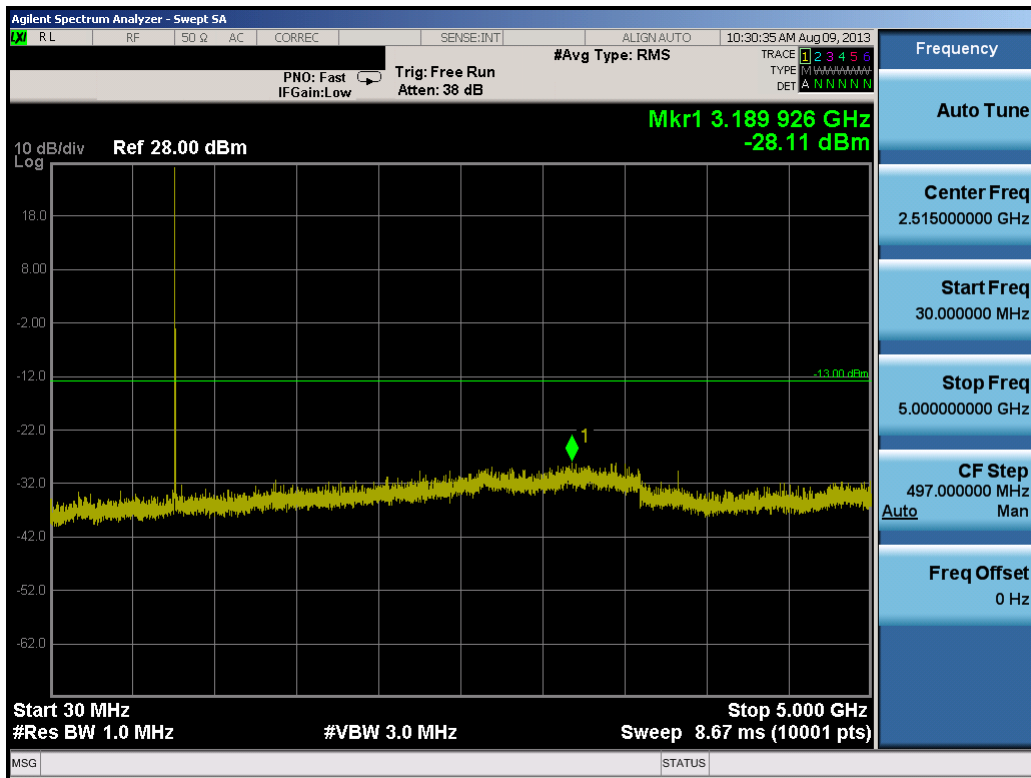


Plot 7-9. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 33 of 68

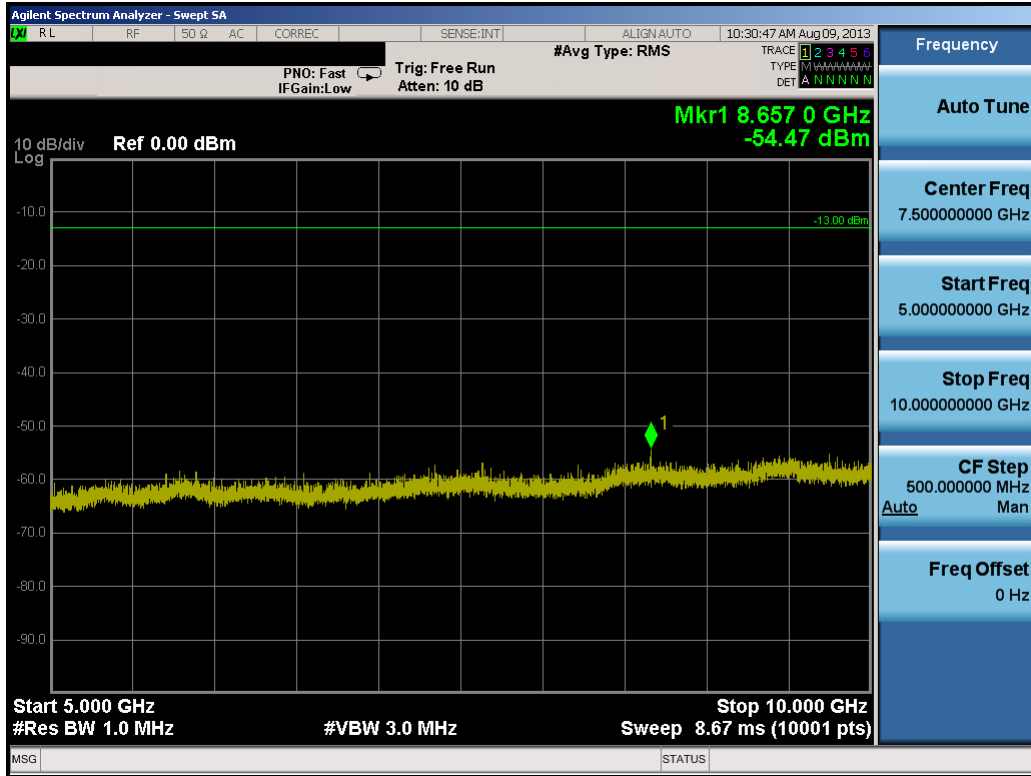

Plot 7-10. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

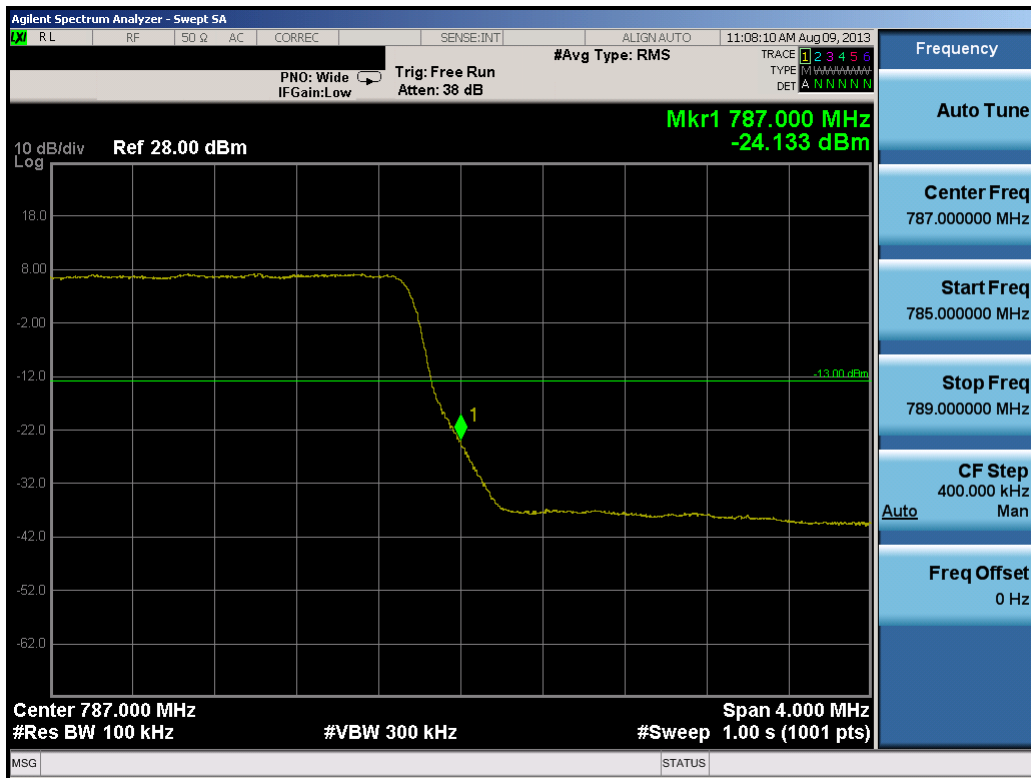


Plot 7-11. Upper Band Edge Plot (5.0MHz QPSK – RB Size 25)

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 34 of 68




Plot 7-12. Upper Emission Mask Plot (5.0MHz QPSK – RB Size 25)

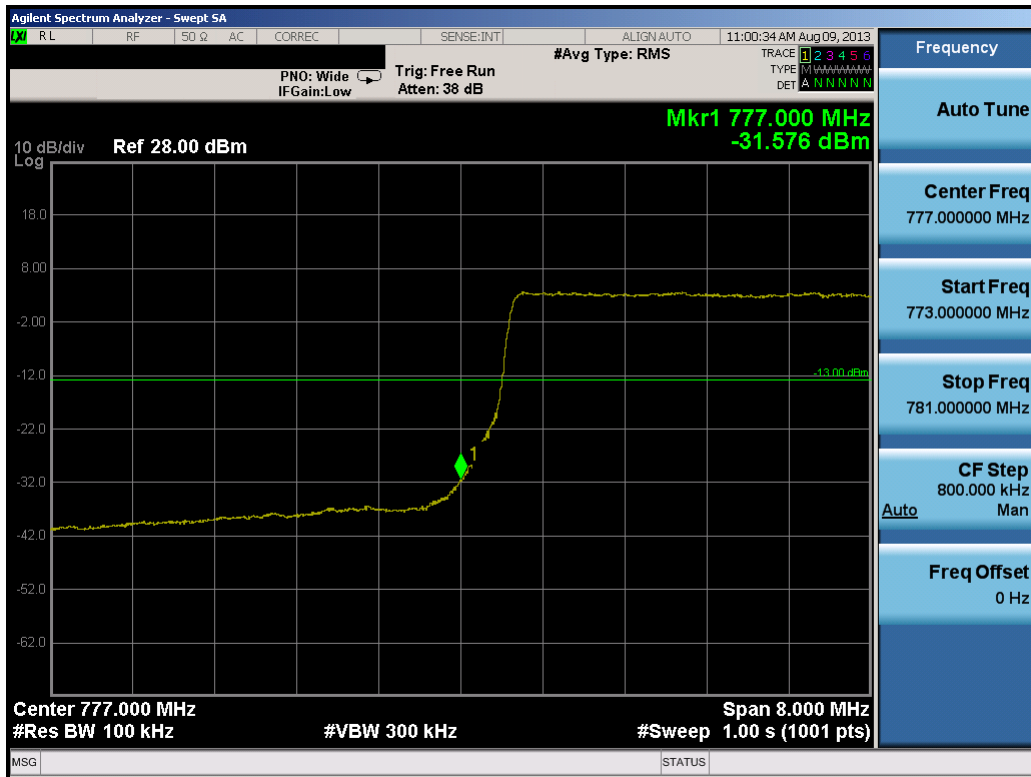


Plot 7-13. Lower Band Edge Plot (10.0MHz QPSK – RB Size 50)

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 35 of 68

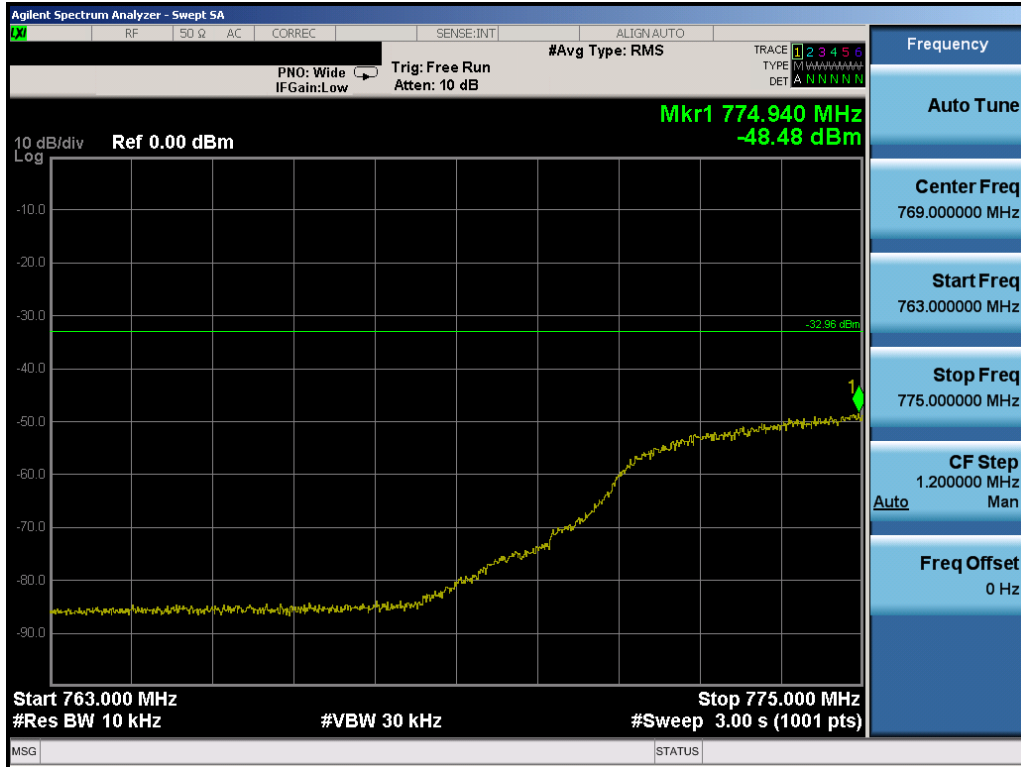


Plot 7-14. Lower Emission Mask Plot (10.0MHz QPSK – RB Size 50)

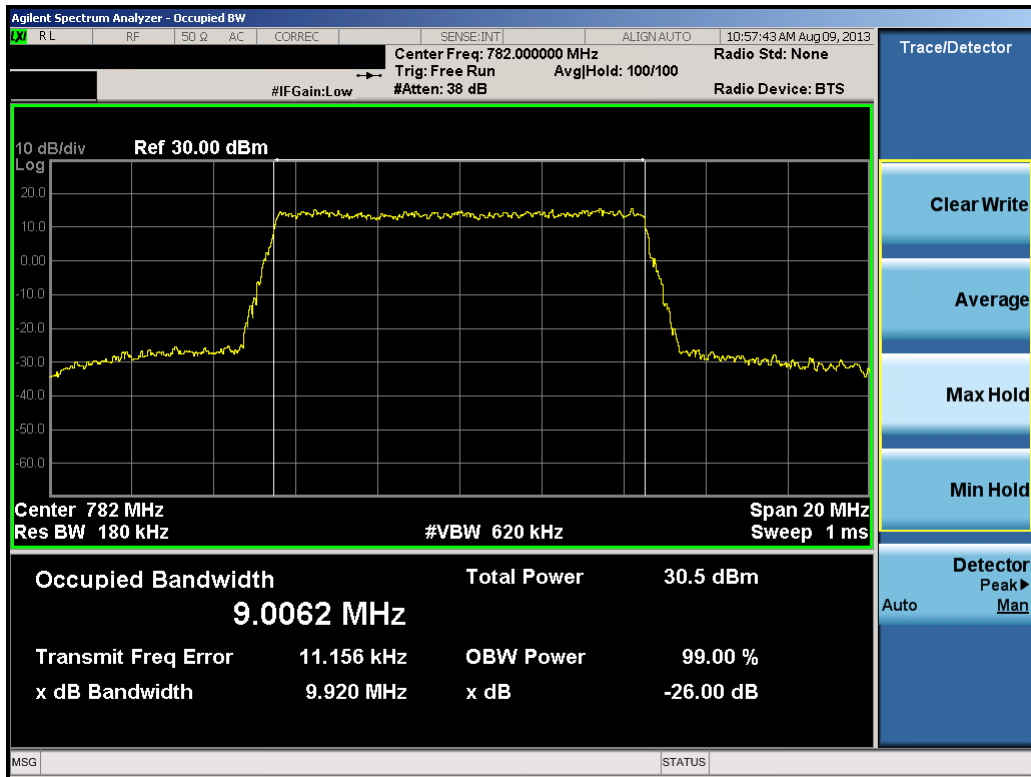


Plot 7-15. Occupied Bandwidth Plot (10.0MHz QPSK – RB Size 50)

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 36 of 68

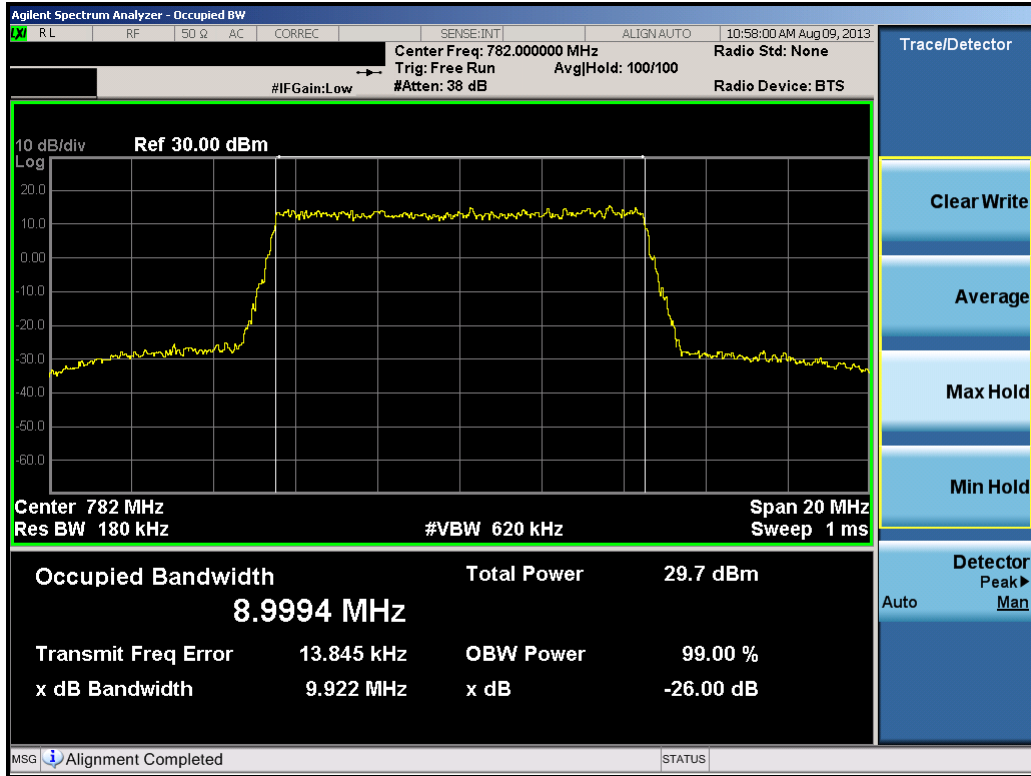


Plot 7-16. Occupied Bandwidth Plot (10.0MHz 16-QAM – RB Size 50)

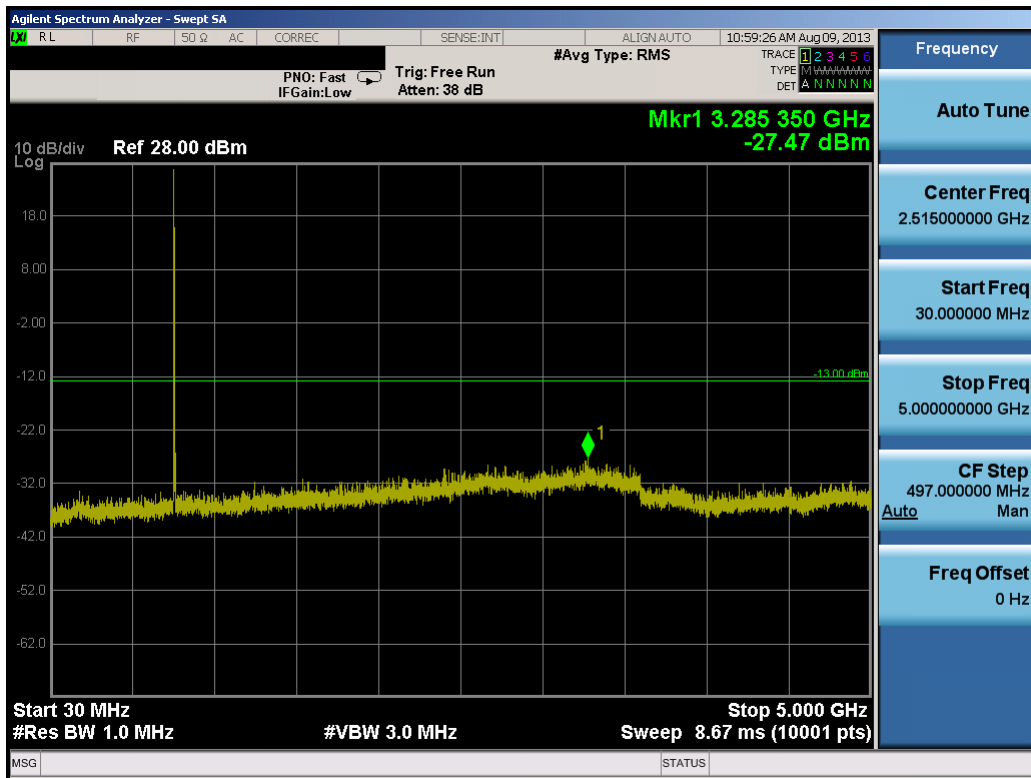

Plot 7-17. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0)

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 37 of 68

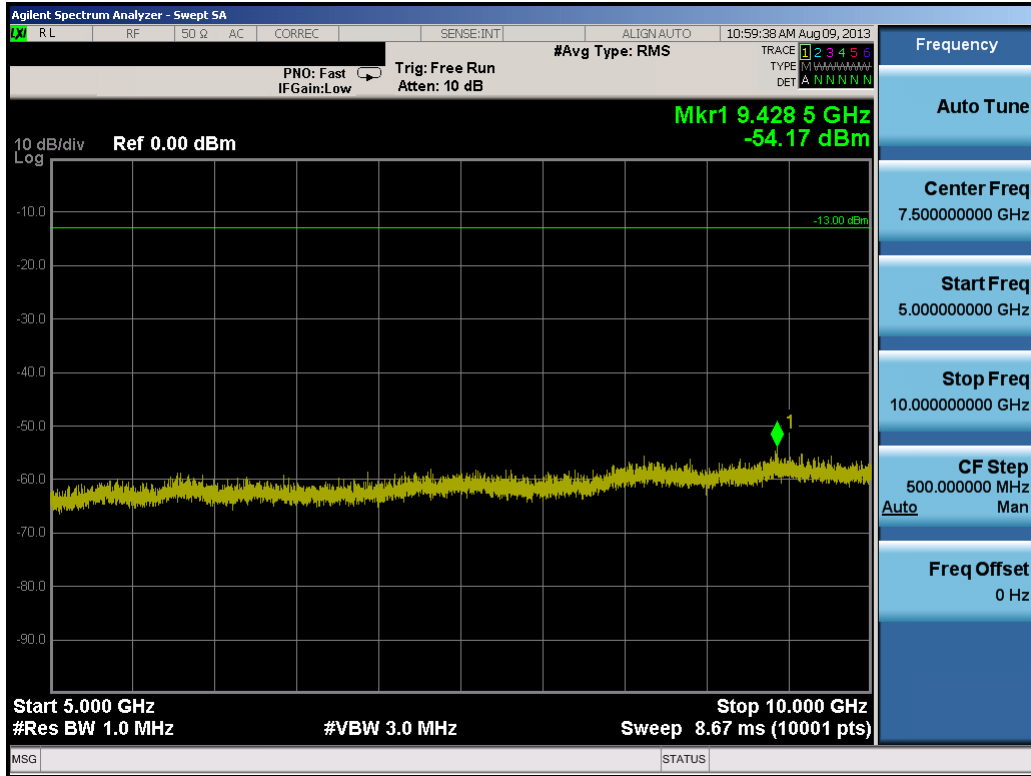

Plot 7-18. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0)





Plot 7-19. Upper Band Edge Plot (10.0MHz QPSK – RB Size 50)

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 38 of 68




Plot 7-20. Lower Emission Mask Plot (10.0MHz QPSK – RB Size 50)


FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset	Page 39 of 68	

8.0 BAND 4 PLOTS OF EMISSIONS

Note: All bandwidths, RB configurations, and modulations were investigated. The worst case test results are reported below.

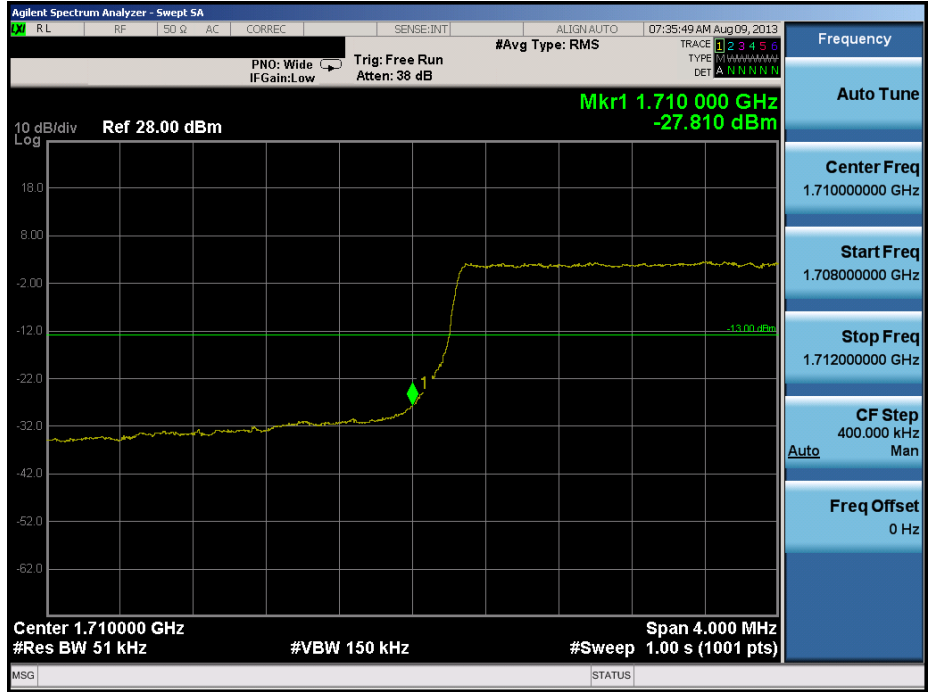


Plot 8-1. Lower Band Edge Plot (5.0MHz QPSK – RB Size 25)

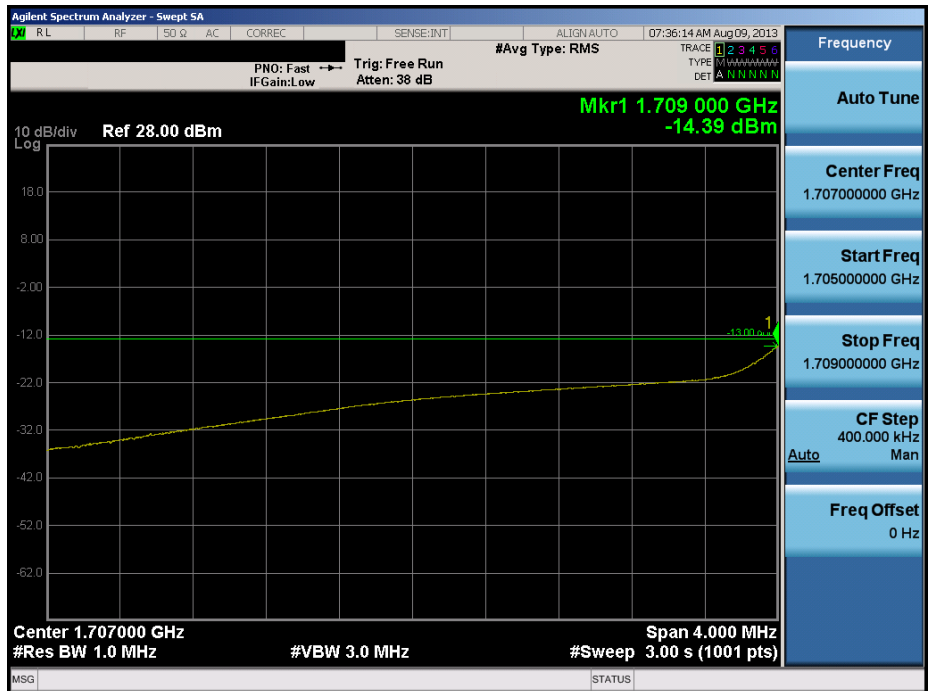


Plot 8-2. Lower Extended Band Edge Plot (5.0MHz QPSK – RB Size 25)

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 40 of 68

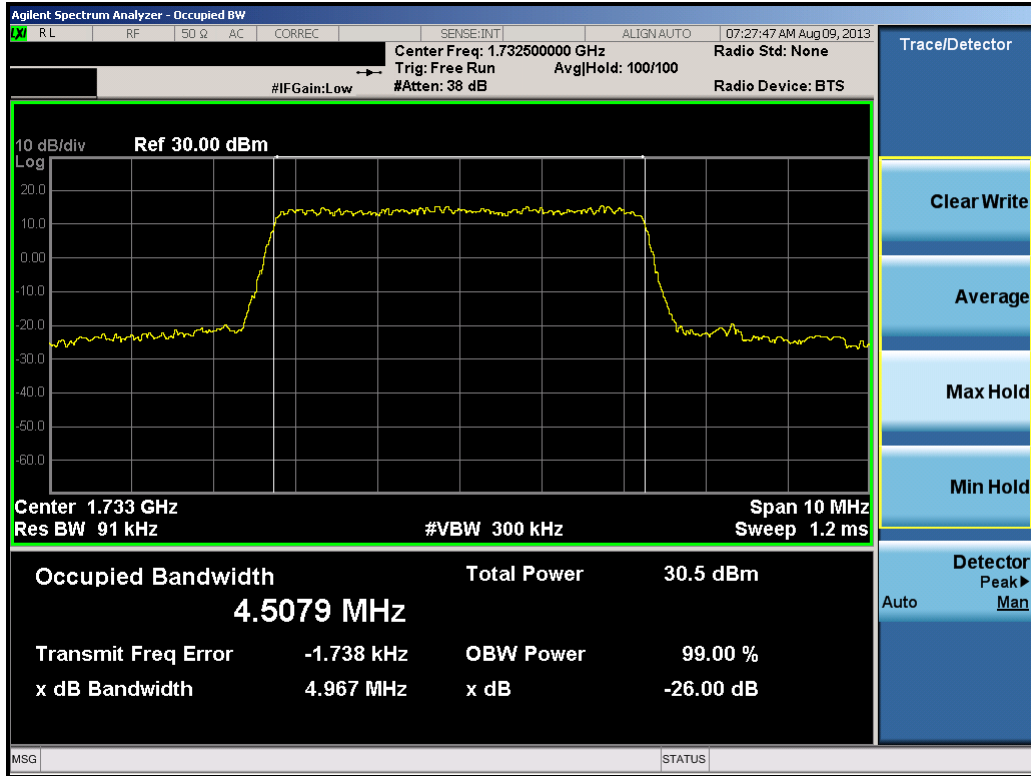


Plot 8-3. Occupied Bandwidth Plot (5.0MHz QPSK – RB Size 25)

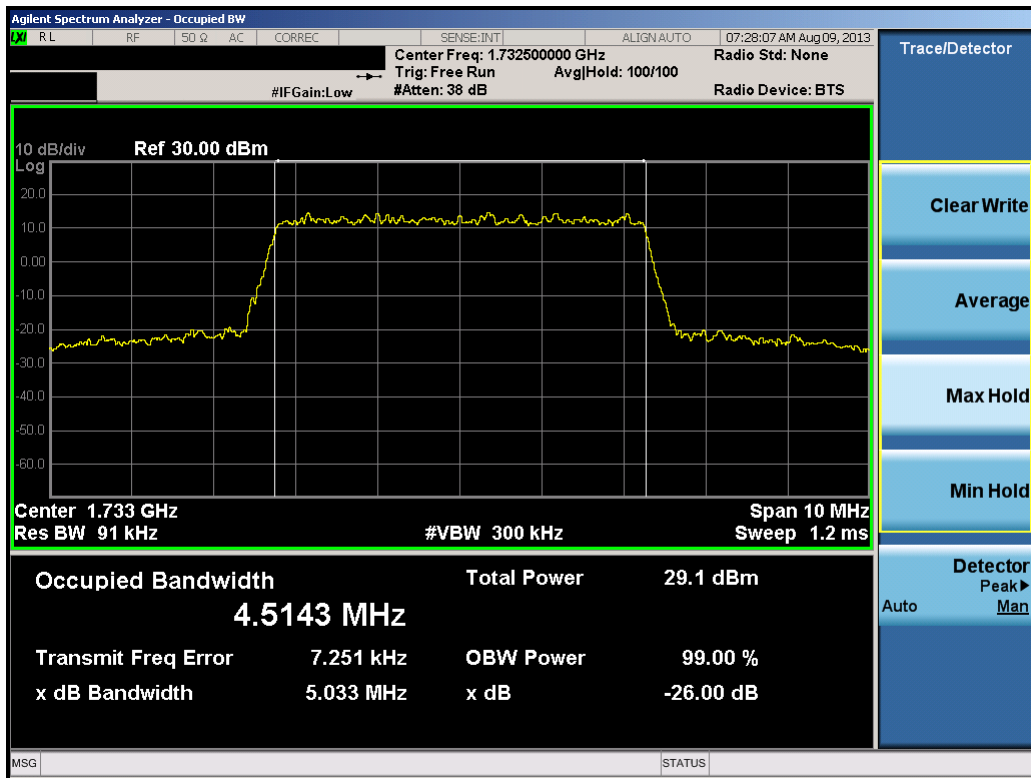

Plot 8-4. Occupied Bandwidth Plot (5.0MHz 16-QAM – RB Size 25)

FCC ID: A3LSMN900V	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 41 of 68

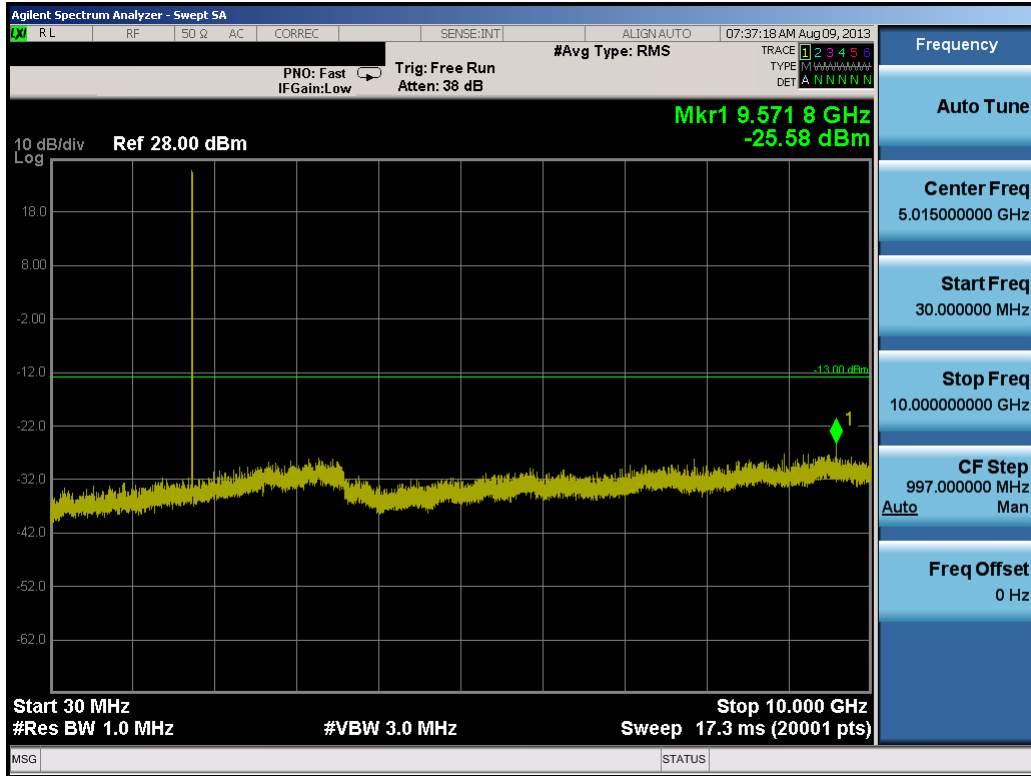

Plot 8-9. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)




Plot 8-10. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 44 of 68




Plot 8-11. Upper Band Edge Plot (5.0MHz QPSK – RB Size 25)

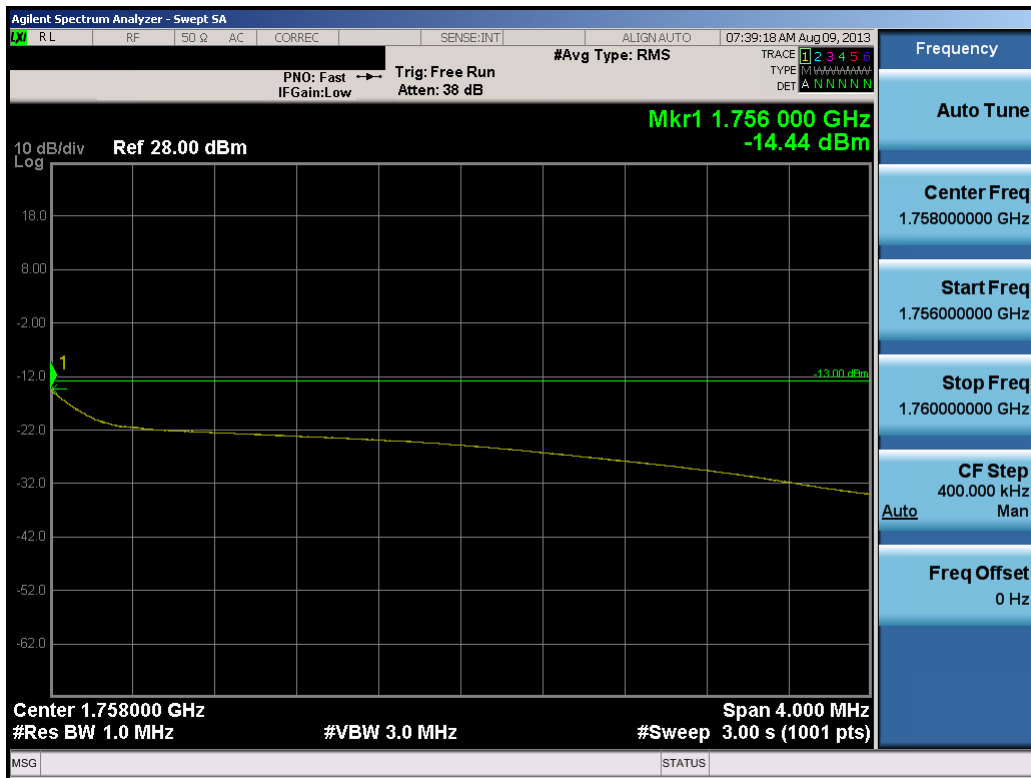


Plot 8-12. Upper Extended Band Edge Plot (5.0MHz QPSK – RB Size 25)

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 45 of 68

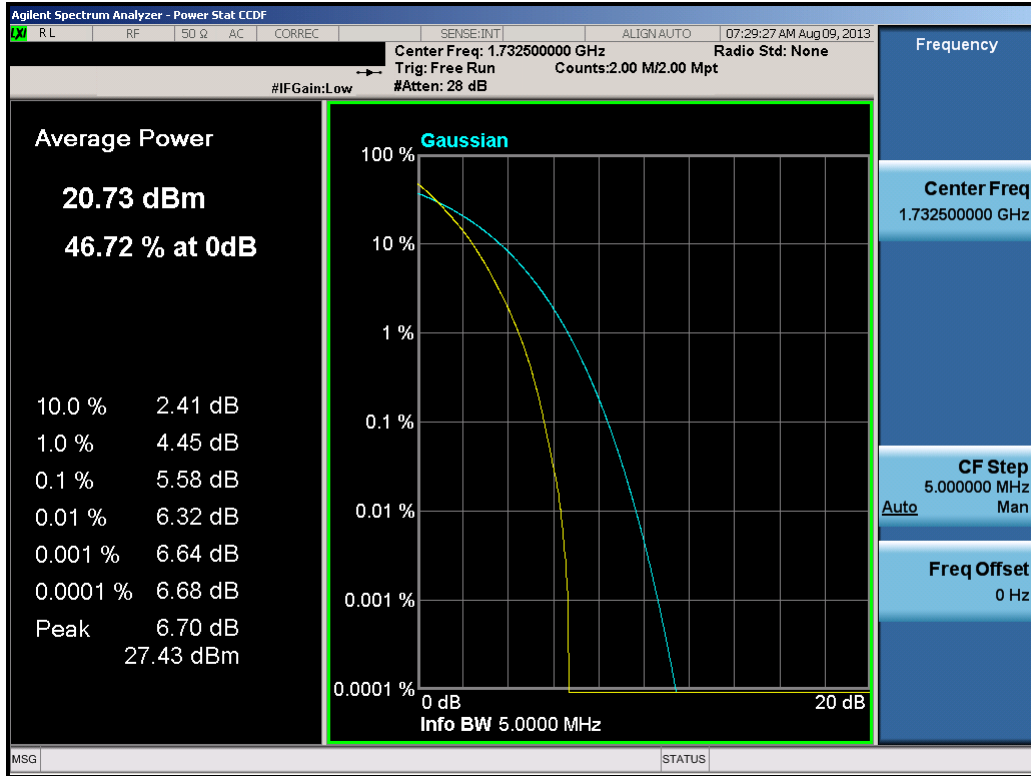


Plot 8-13. PAR Plot (5.0MHz QPSK – RB Size 25)

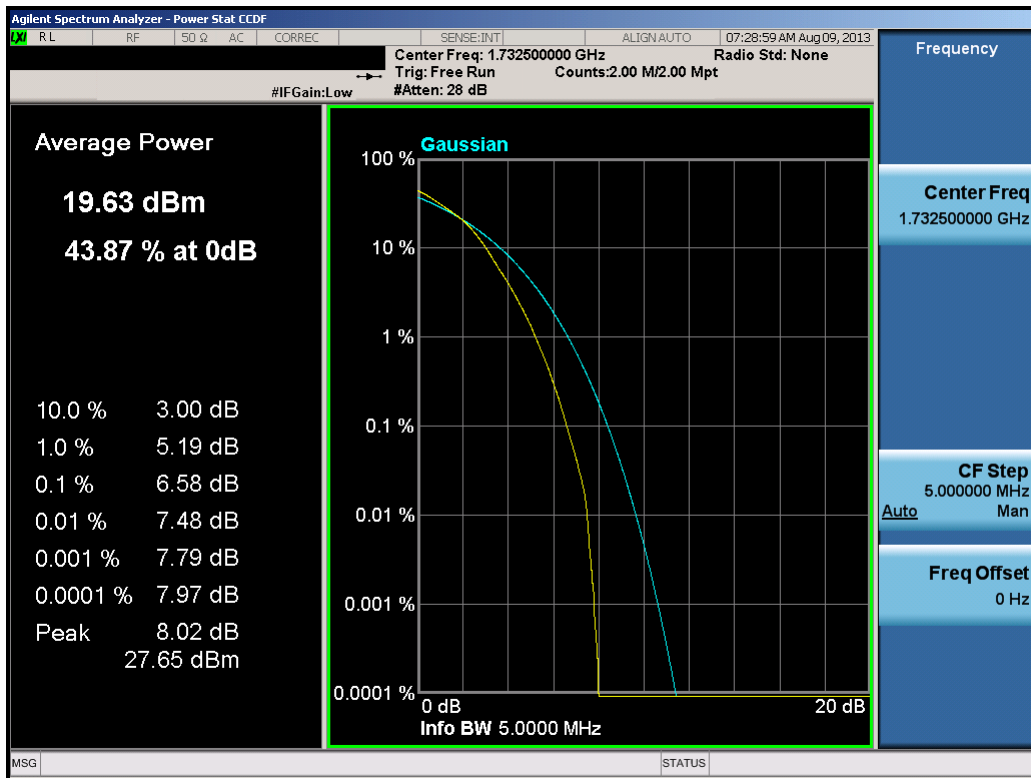


Plot 8-14. PAR Plot (5.0MHz 16-QAM – RB Size 25)

FCC ID: A3LSMN900V	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 46 of 68

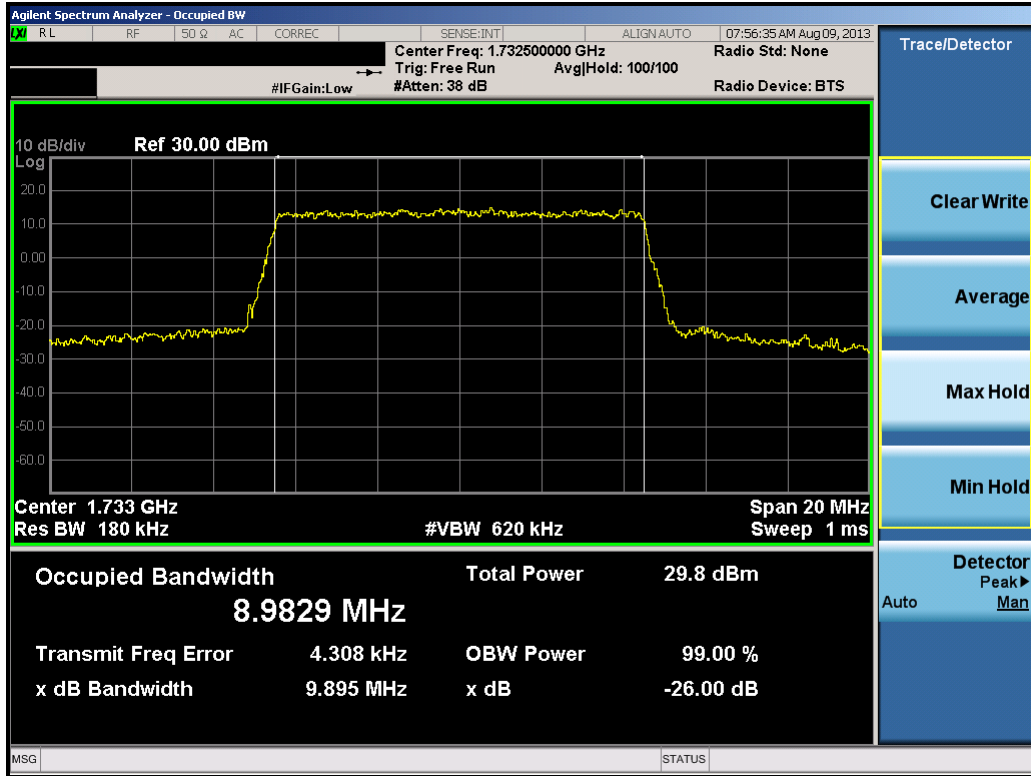


Plot 8-17. Occupied Bandwidth Plot (10.0MHz QPSK – RB Size 50)

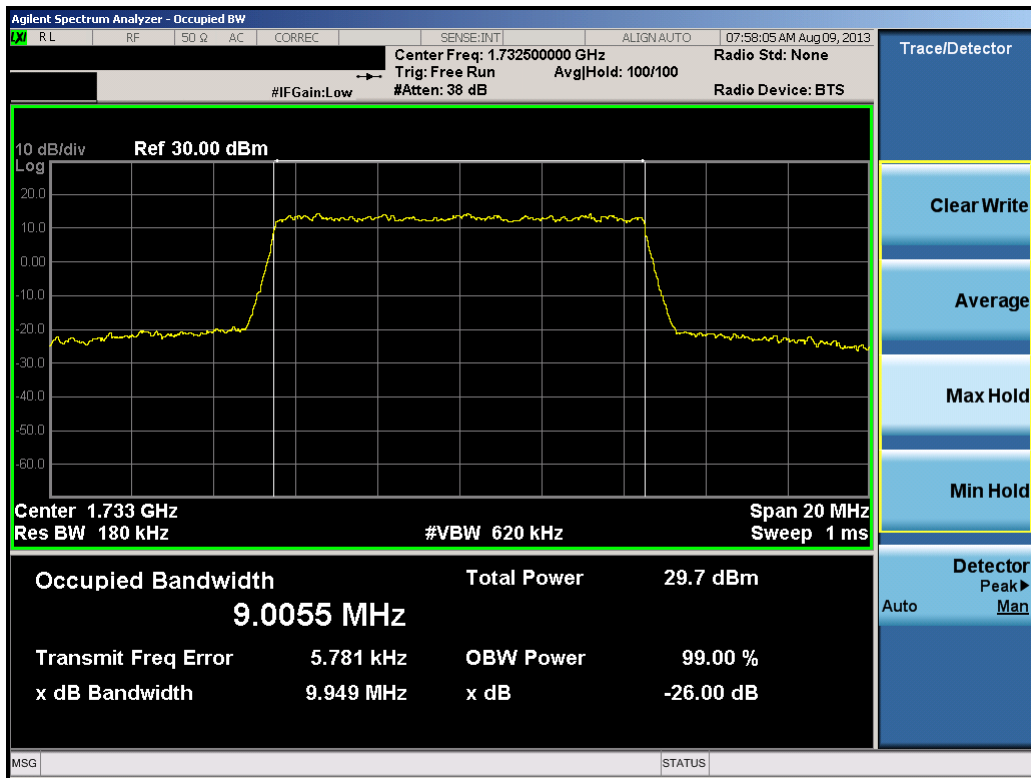


Plot 8-18. Occupied Bandwidth Plot (10.0MHz 16-QAM – RB Size 50)

FCC ID: A3LSMN900V	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 48 of 68

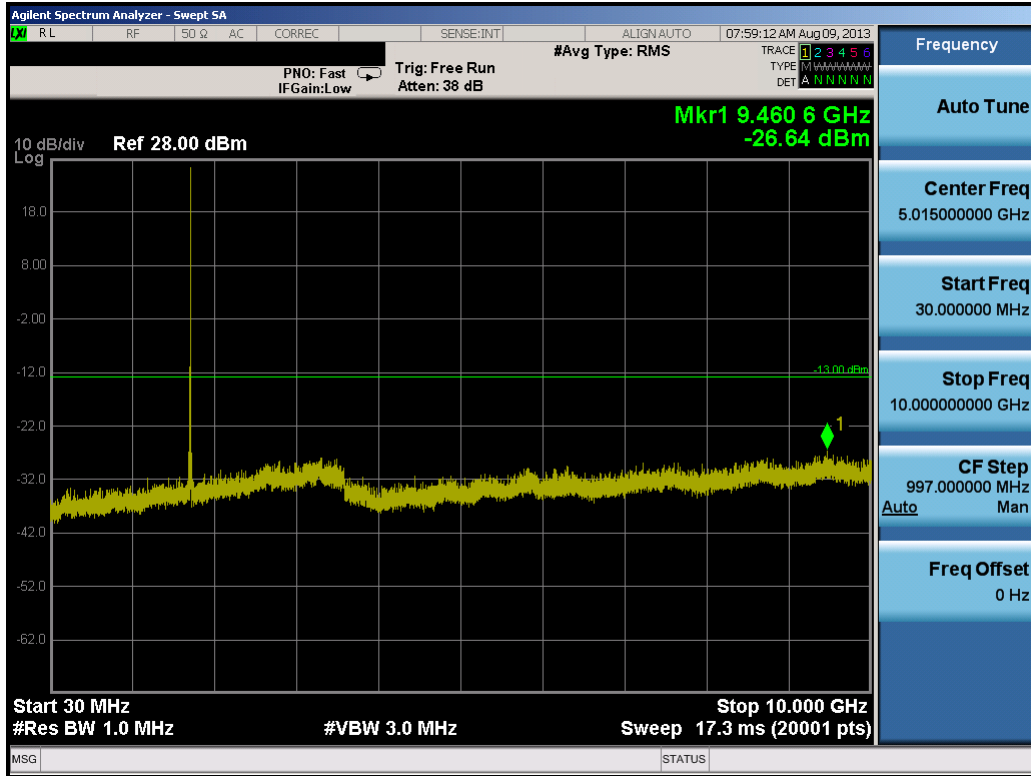


Plot 8-21. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

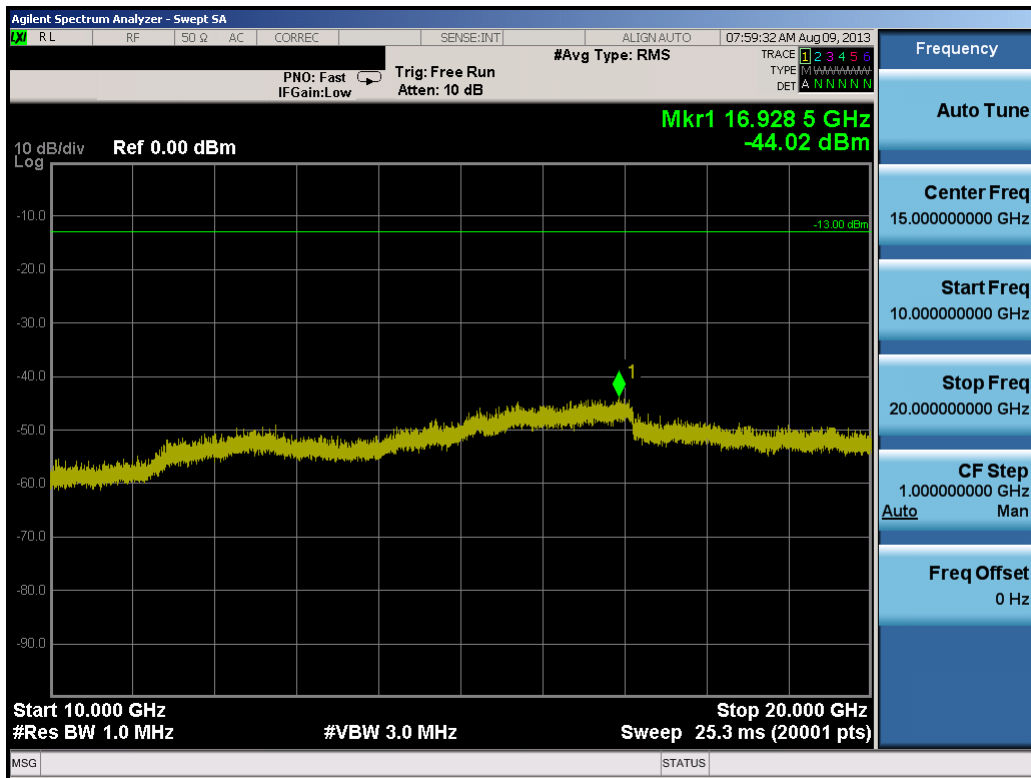


Plot 8-22. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

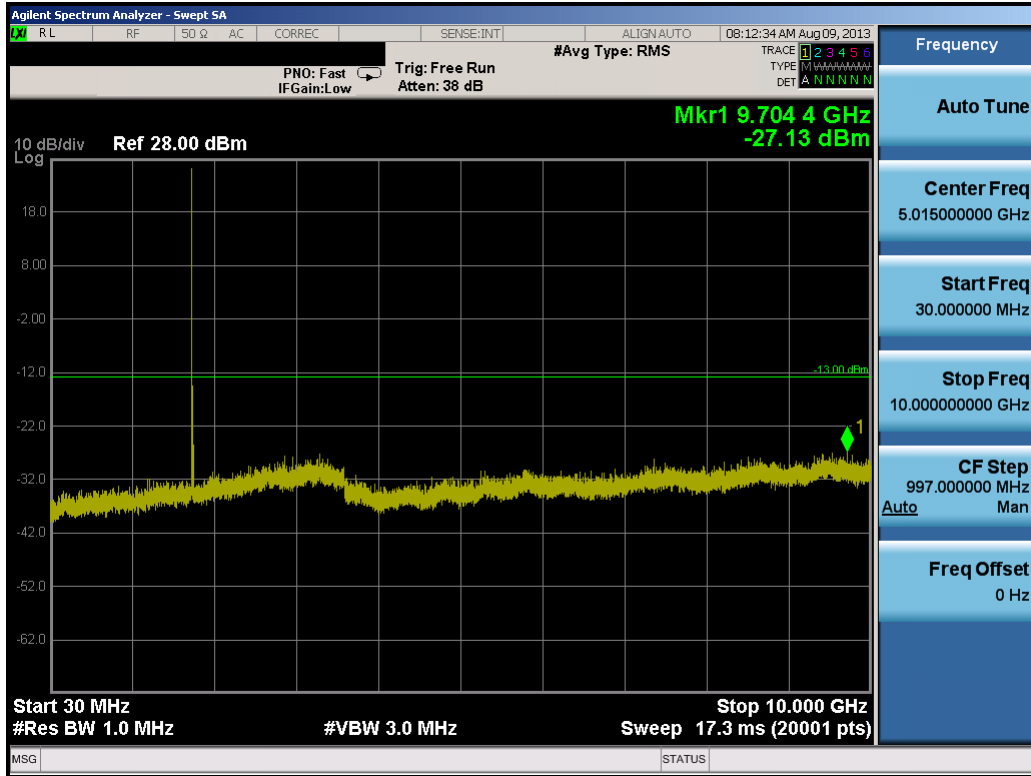

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 50 of 68

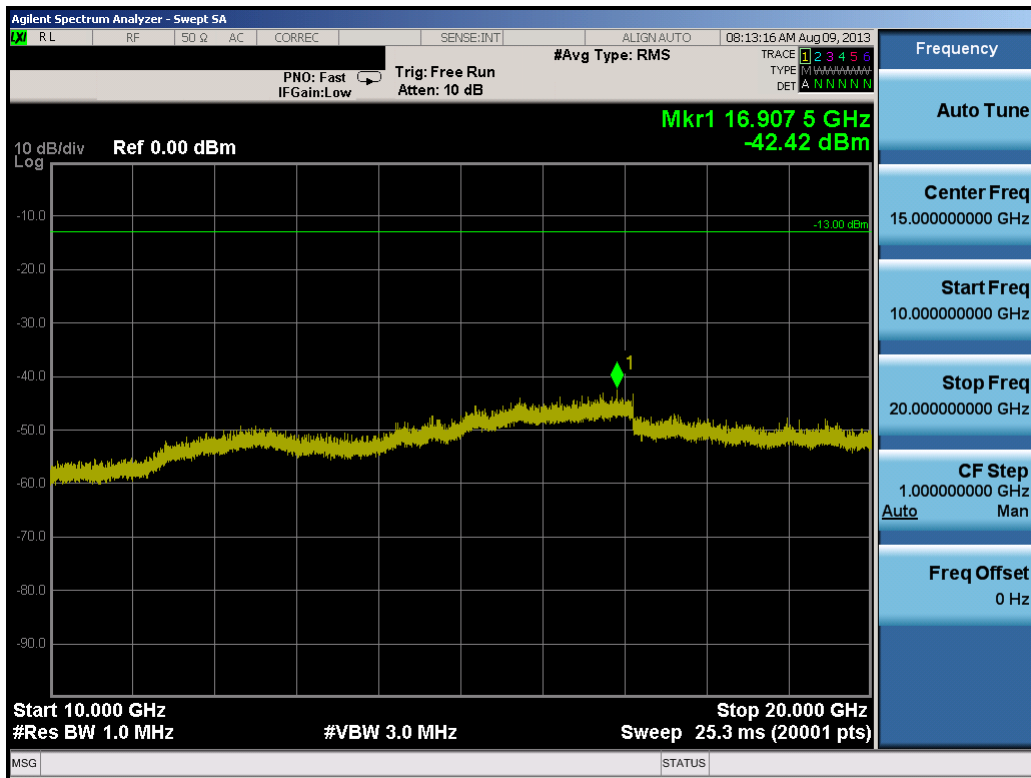


Plot 8-23. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)




Plot 8-24. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 51 of 68

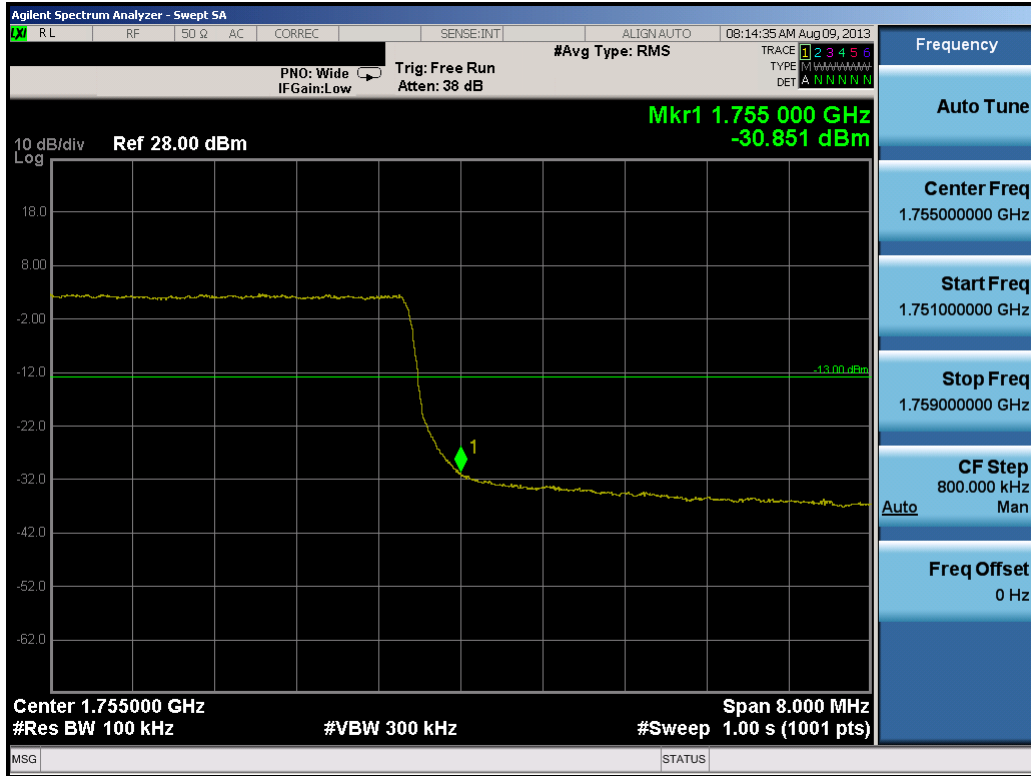


Plot 8-25. Upper Band Edge Plot (10.0MHz QPSK – RB Size 50)

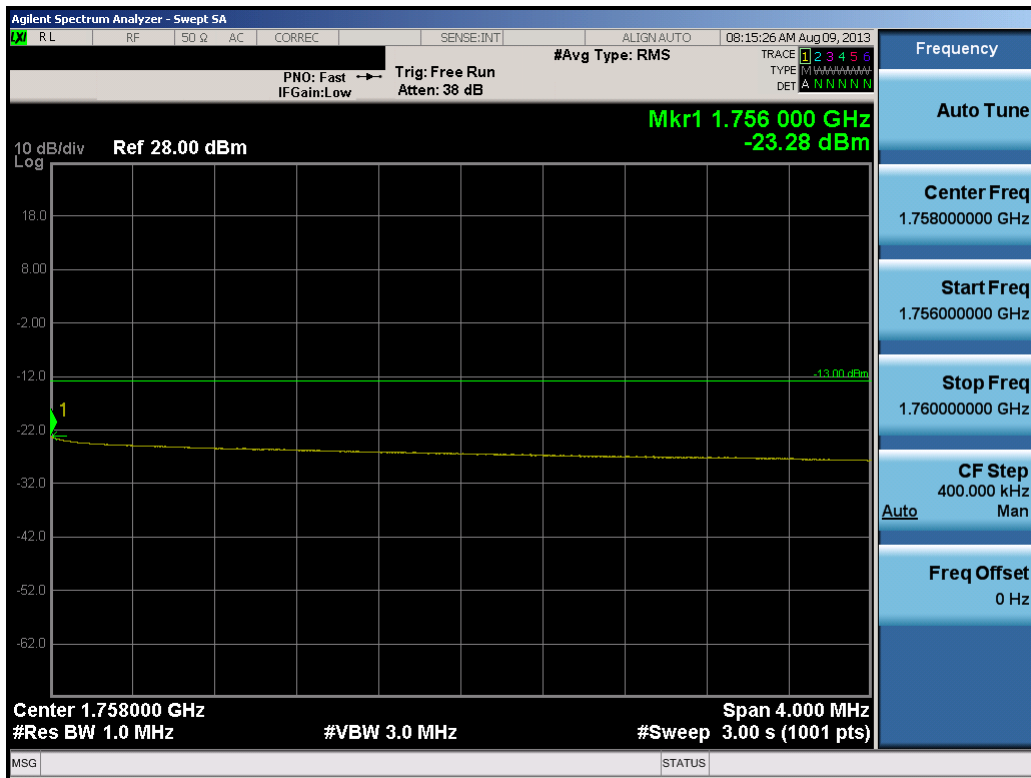


Plot 8-26. Upper Extended Band Edge Plot (10.0MHz QPSK – RB Size 50)

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 52 of 68

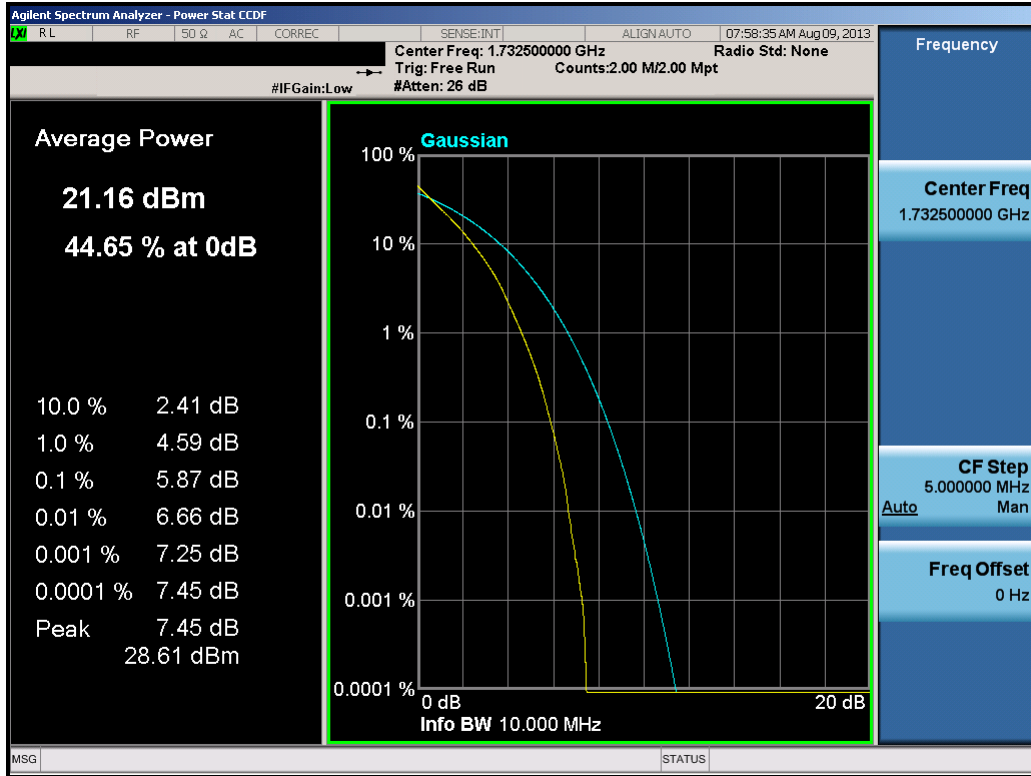


Plot 8-27. PAR Plot (10.0MHz QPSK – RB Size 50)

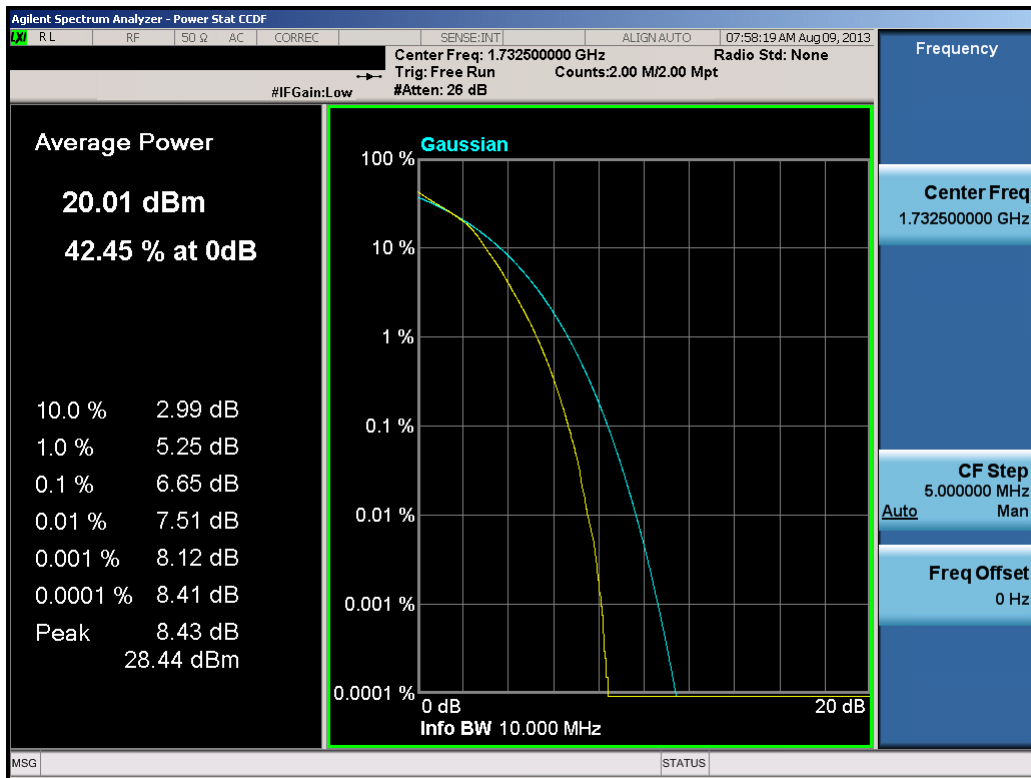


Plot 8-28. PAR Plot (10.0MHz 16-QAM – RB Size 50)

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 53 of 68

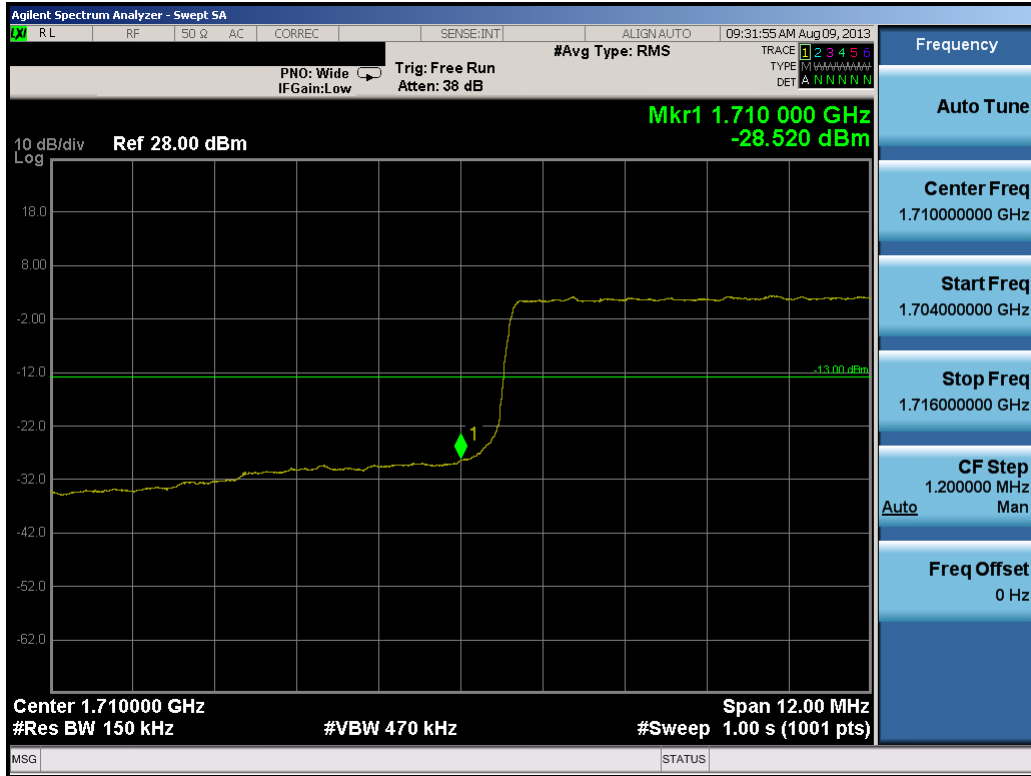


Plot 8-29. Lower Band Edge Plot (15.0MHz QPSK – RB Size 75)

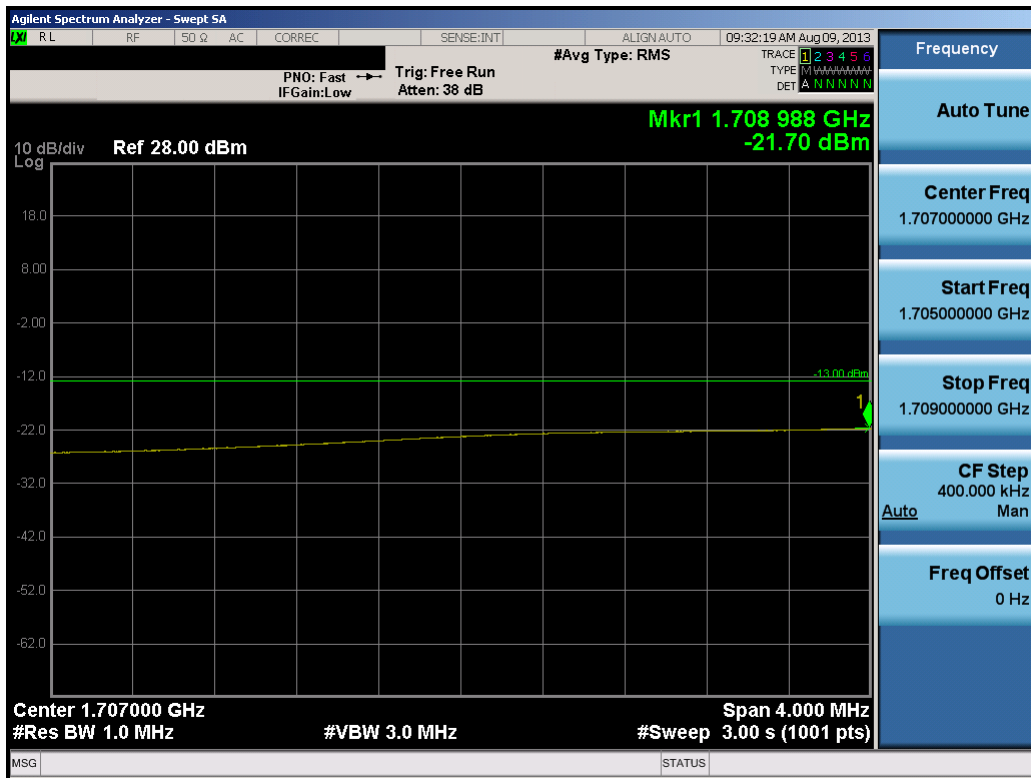


Plot 8-30. Lower Extended Band Edge Plot (15.0MHz QPSK – RB Size 75)

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 54 of 68

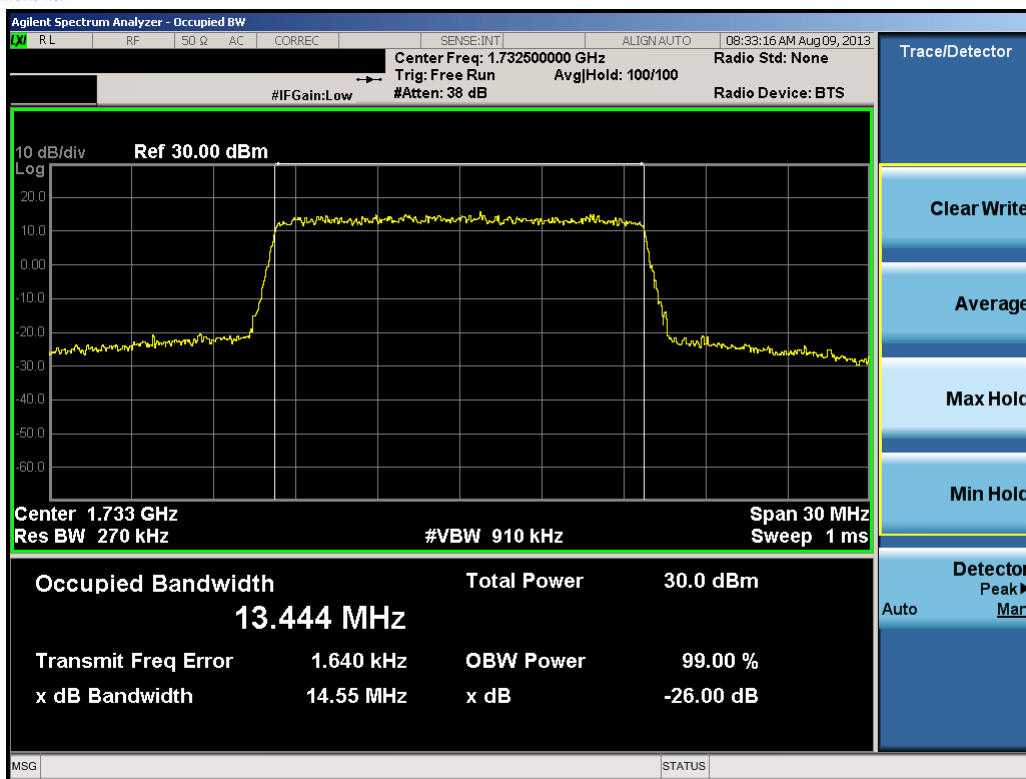


Plot 8-31. Occupied Bandwidth Plot (15.0MHz QPSK – RB Size 75)

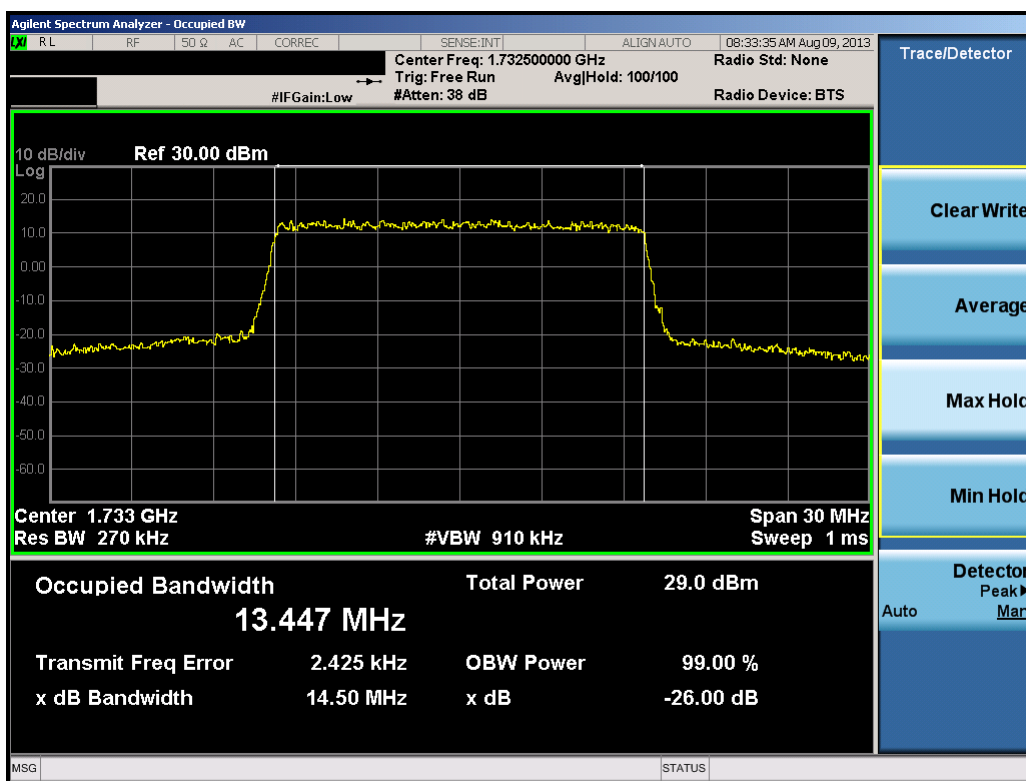


Plot 8-32. Occupied Bandwidth Plot (15.0MHz 16-QAM – RB Size 75)

FCC ID: A3LSMN900V	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 55 of 68

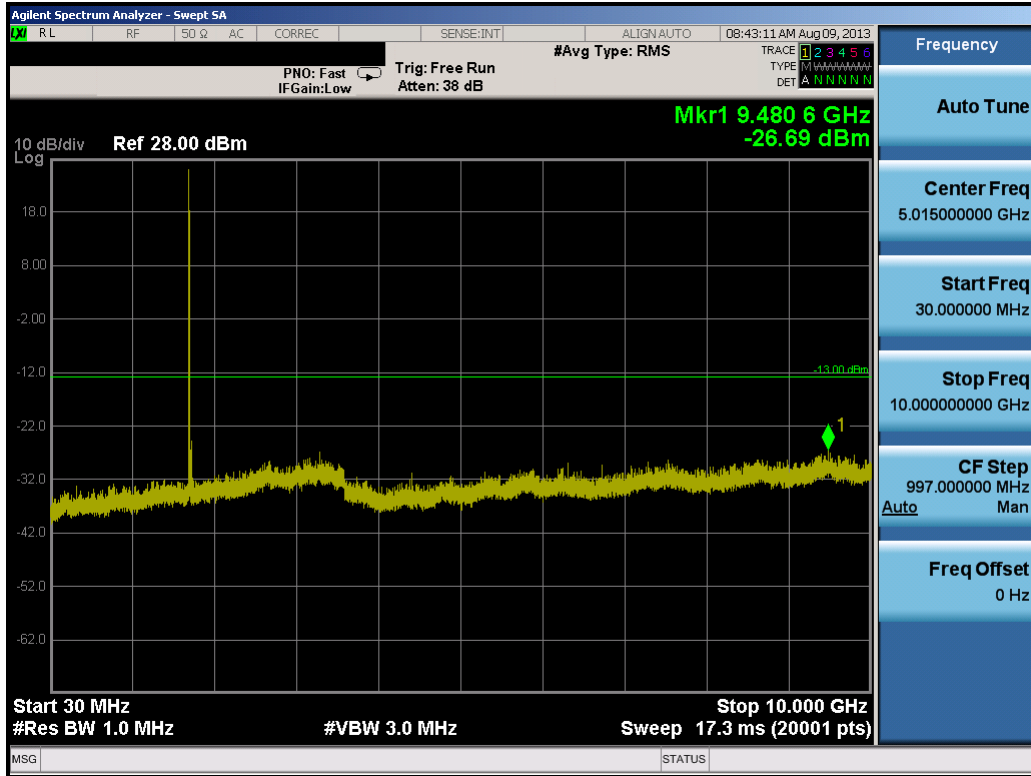


Plot 8-33. Conducted Spurious Plot (15.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

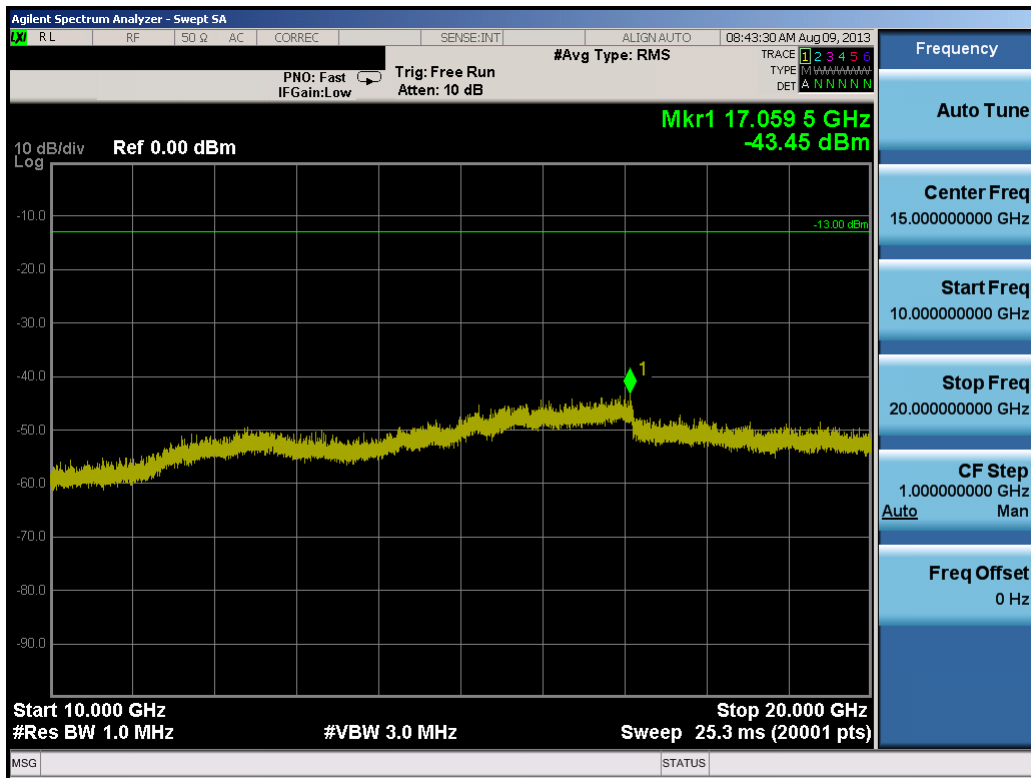


Plot 8-34. Conducted Spurious Plot (15.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 56 of 68

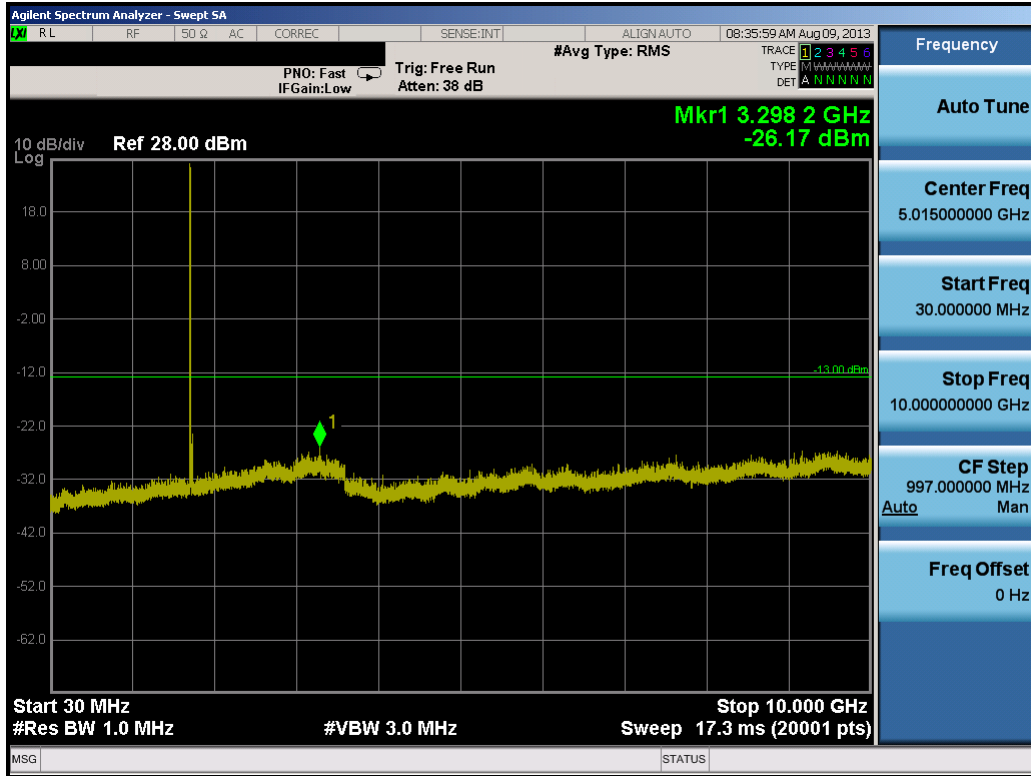


Plot 8-35. Conducted Spurious Plot (15.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

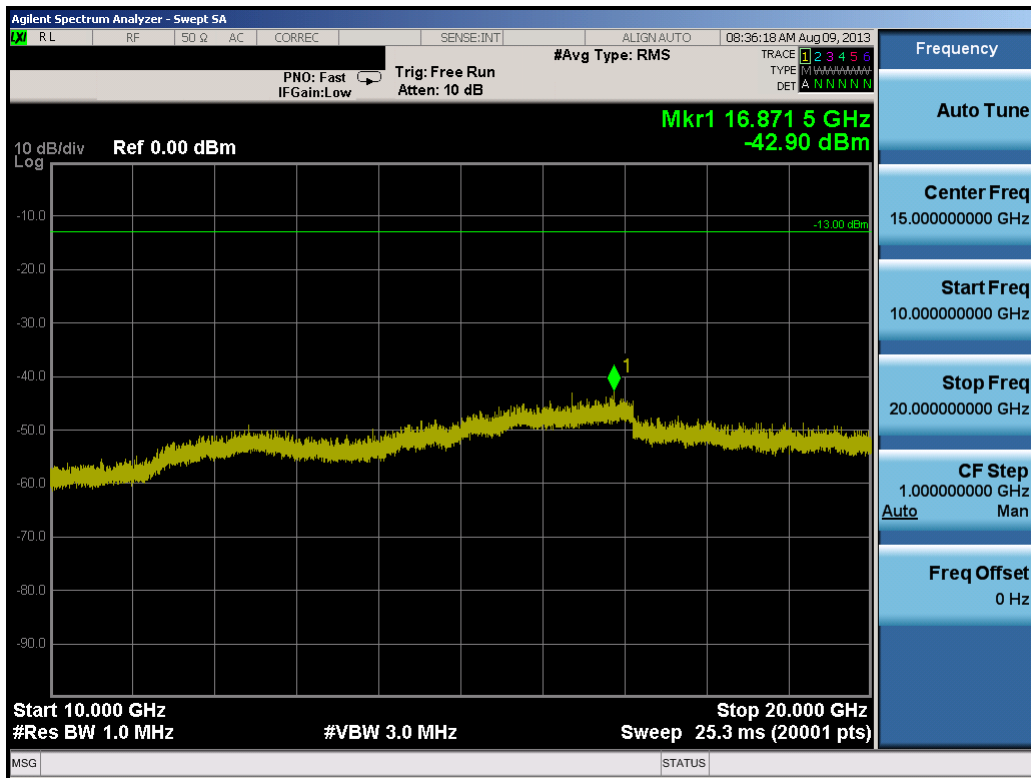


Plot 8-36. Conducted Spurious Plot (15.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 57 of 68

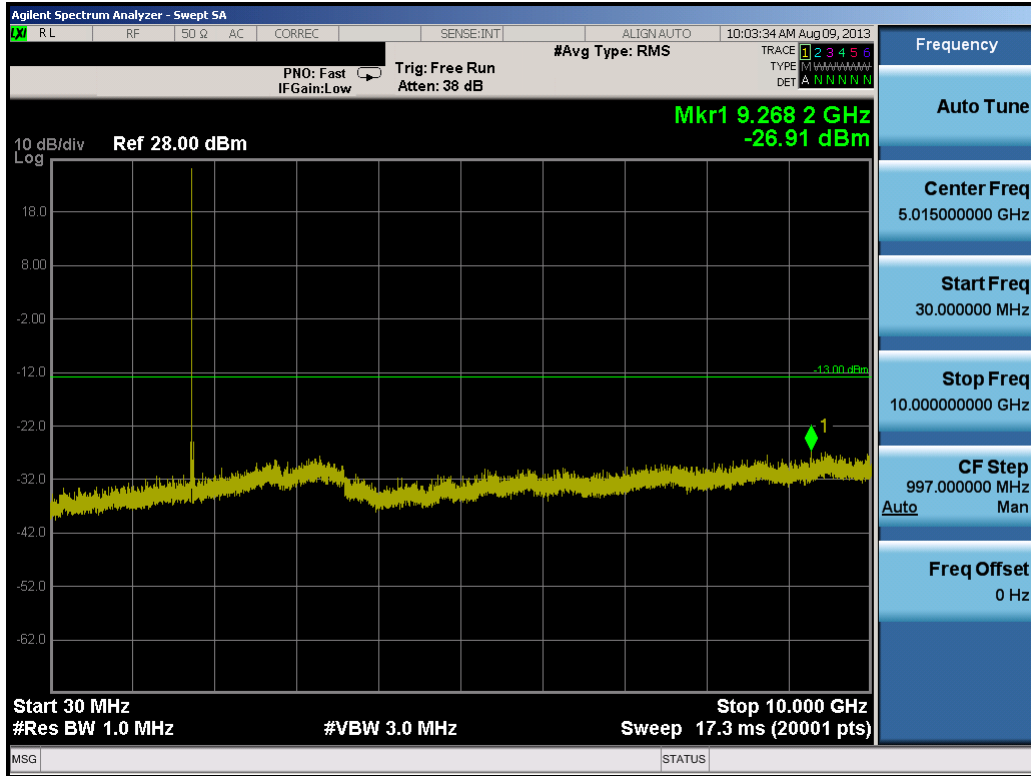


Plot 8-37. Conducted Spurious Plot (15.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

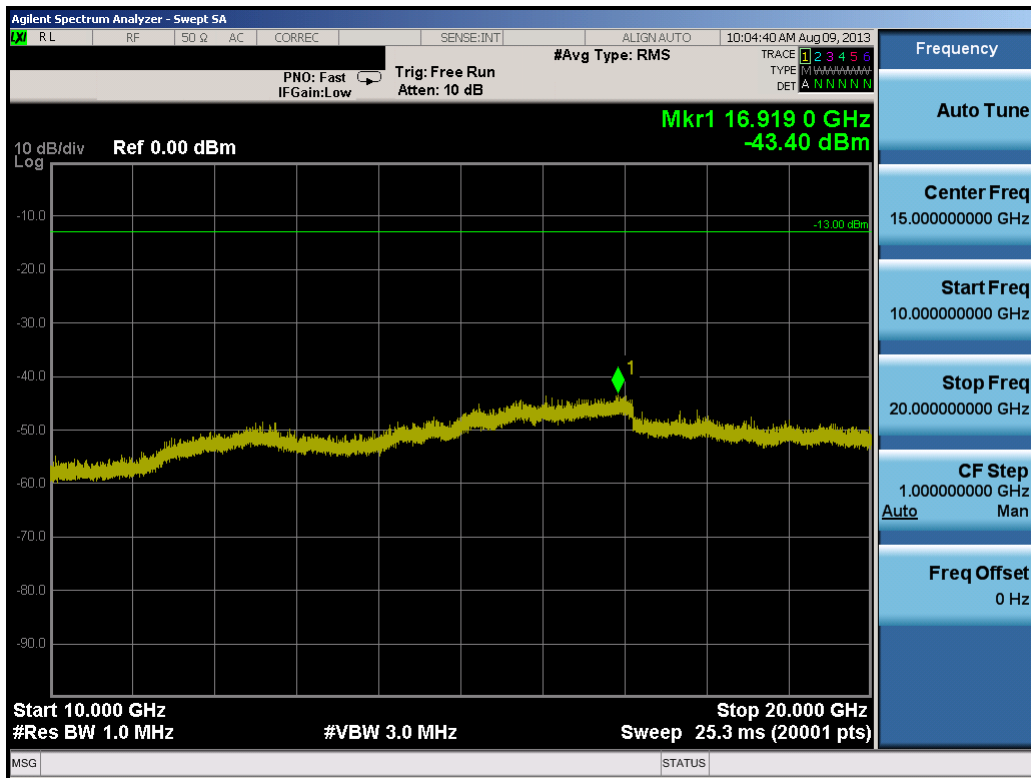


Plot 8-38. Conducted Spurious Plot (15.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 58 of 68

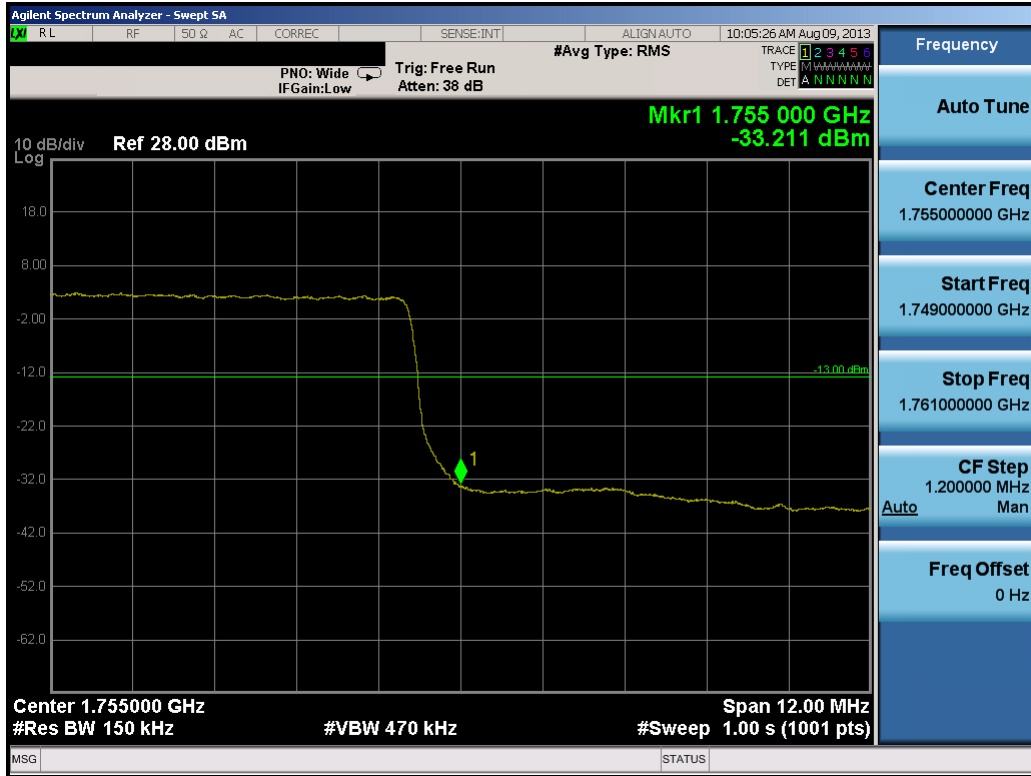


Plot 8-39. Upper Band Edge Plot (15.0MHz QPSK – RB Size 75)

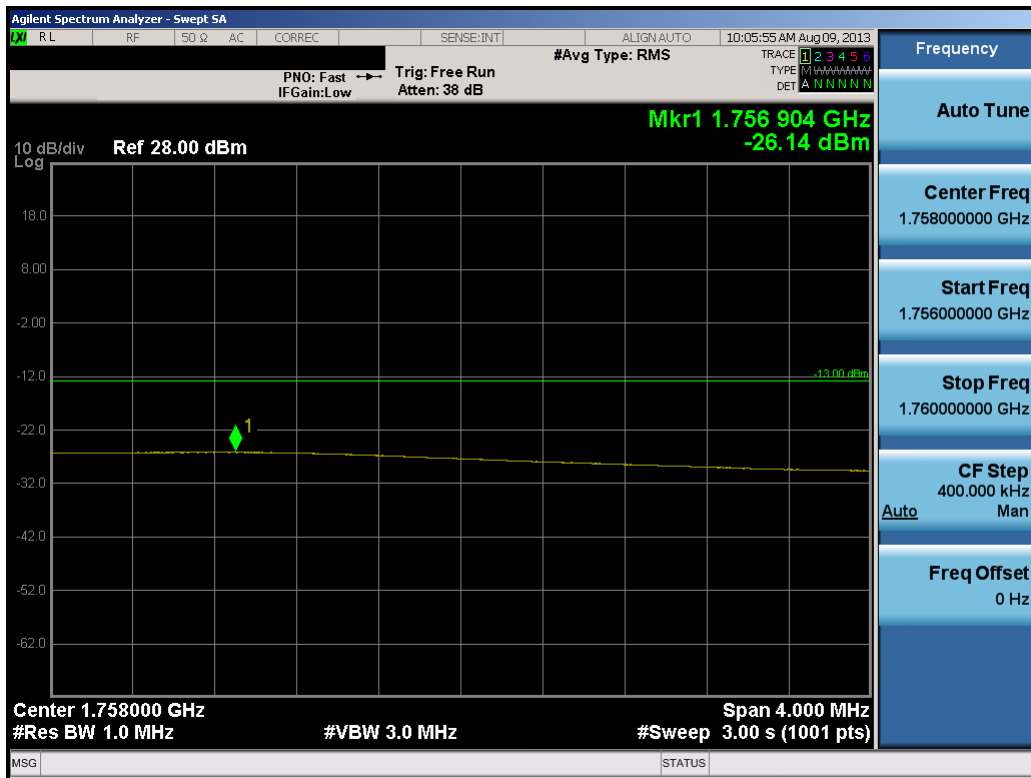


Plot 8-40. Upper Extended Band Edge Plot (15.0MHz QPSK – RB Size 75)

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 59 of 68

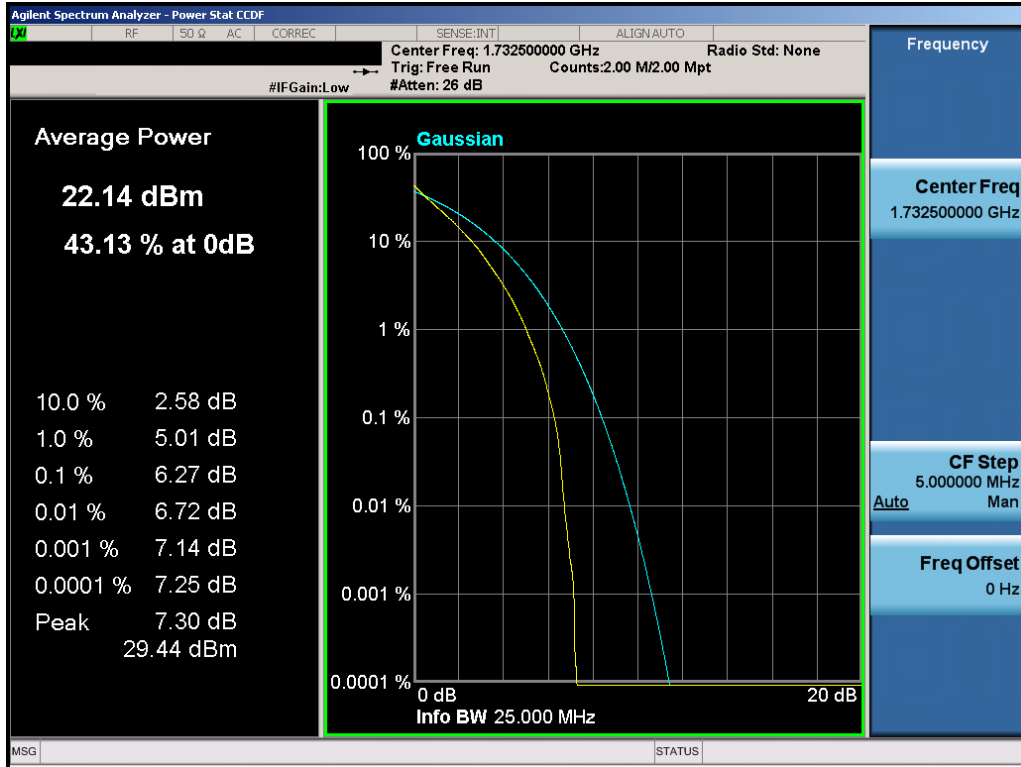


Plot 8-41. PAR Plot (15.0MHz QPSK – RB Size 75)

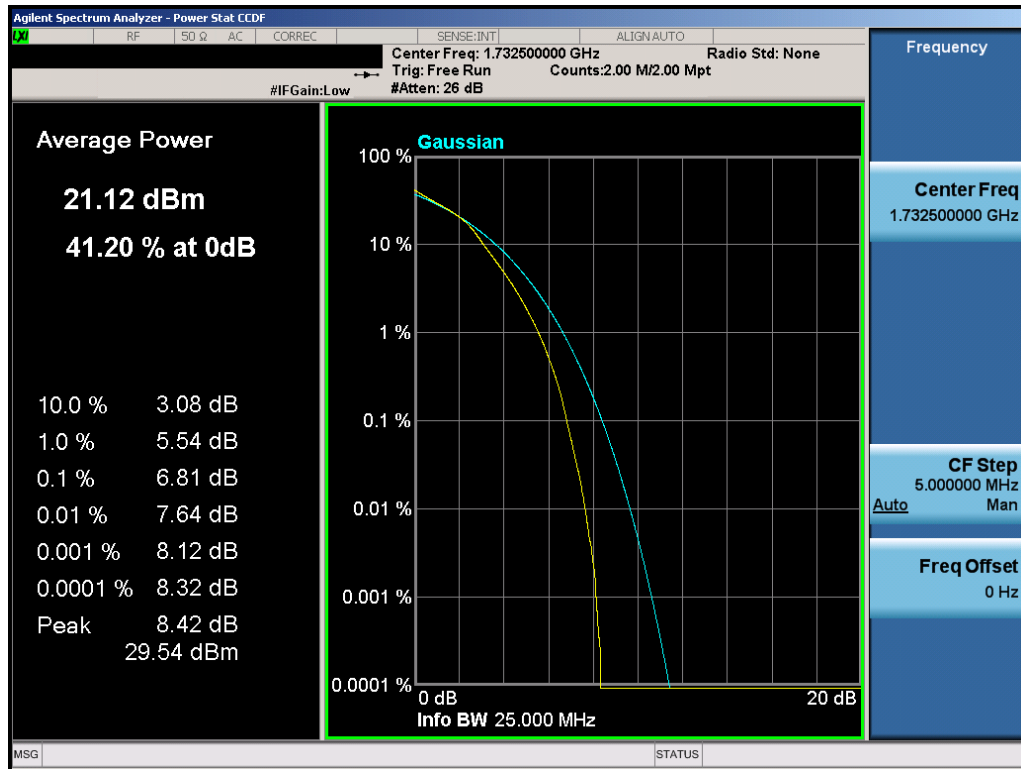


Plot 8-42. PAR Plot (15.0MHz 16-QAM – RB Size 75)

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 60 of 68

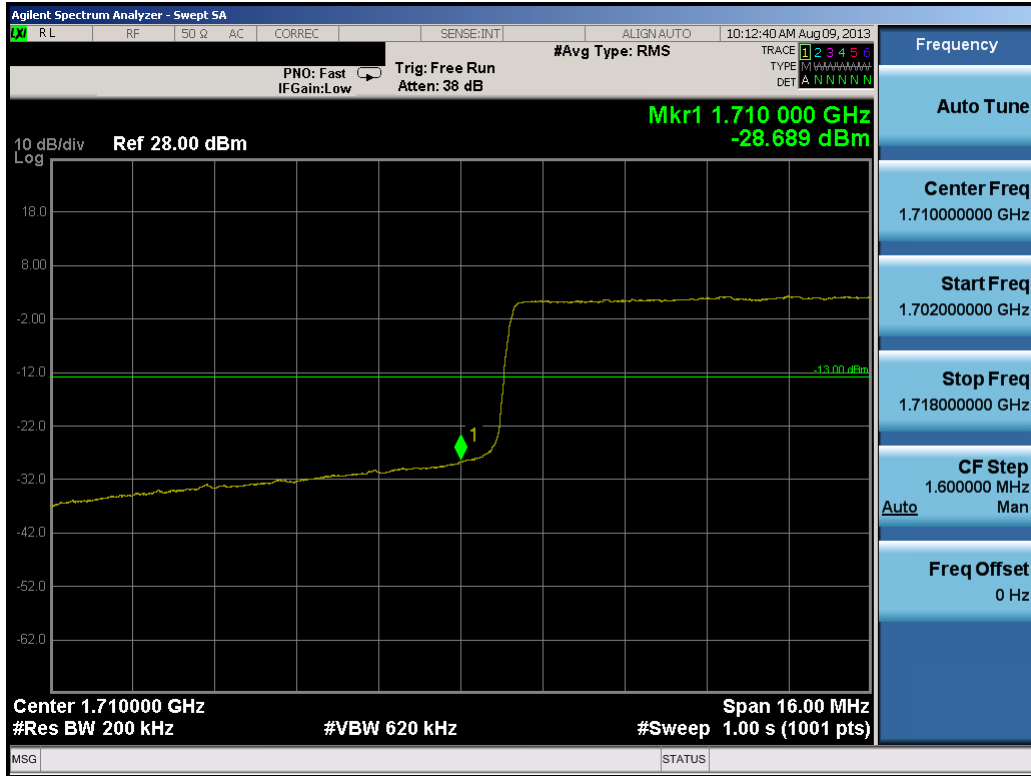


Plot 8-43. Lower Band Edge Plot (20.0MHz QPSK – RB Size 100)

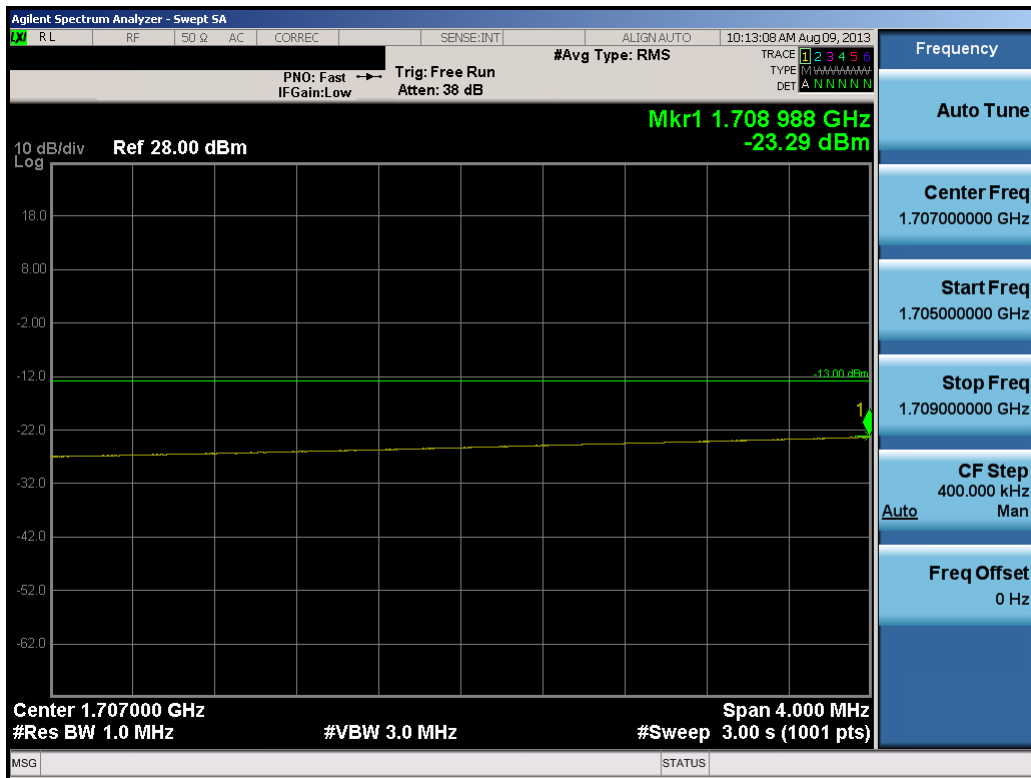


Plot 8-44. Lower Extended Band Edge Plot (20.0MHz QPSK – RB Size 100)

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 61 of 68

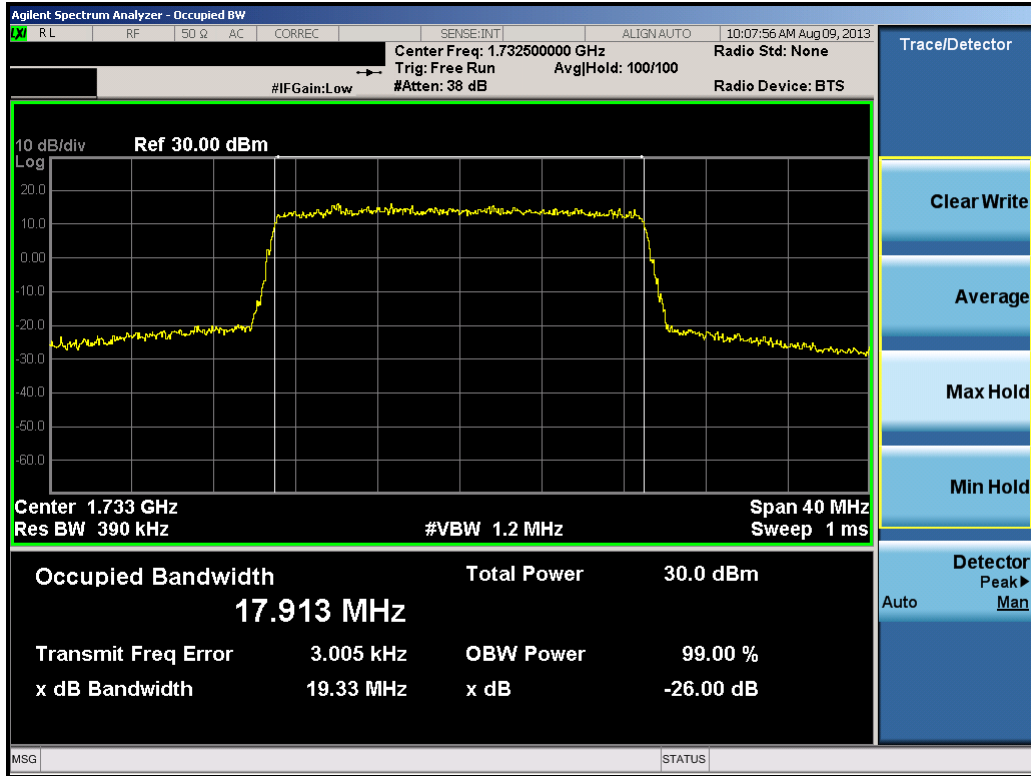


Plot 8-45. Occupied Bandwidth Plot (20.0MHz QPSK – RB Size 100)

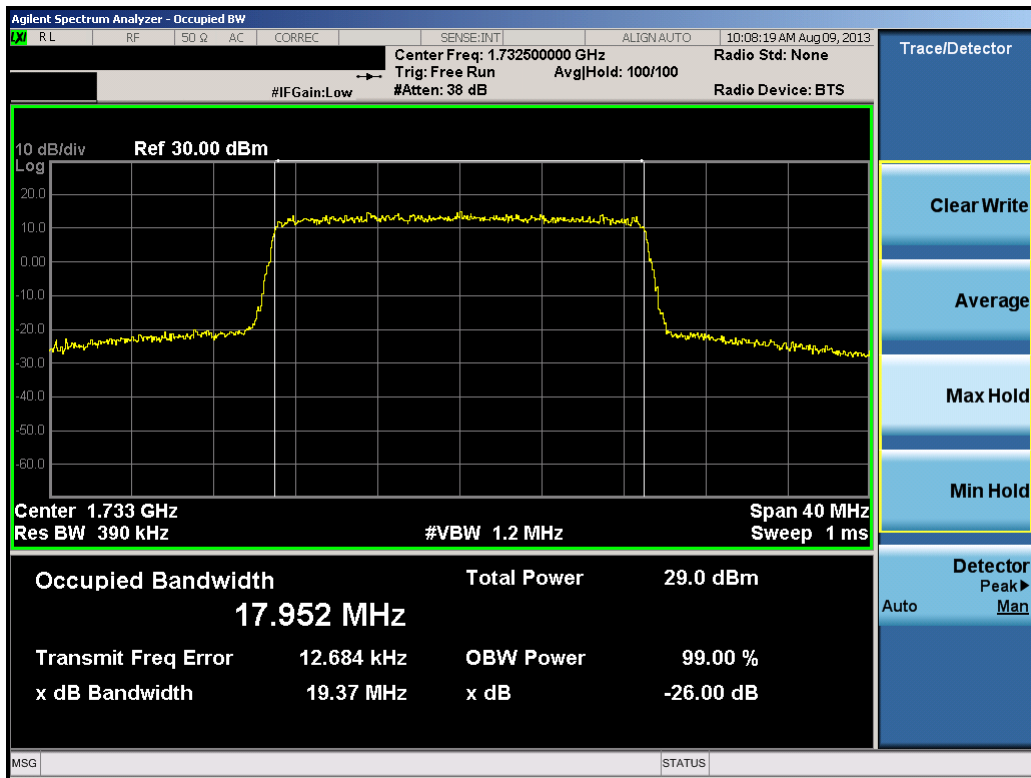


Plot 8-46. Occupied Bandwidth Plot (20.0MHz 16-QAM – RB Size 100)

FCC ID: A3LSMN900V	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 62 of 68

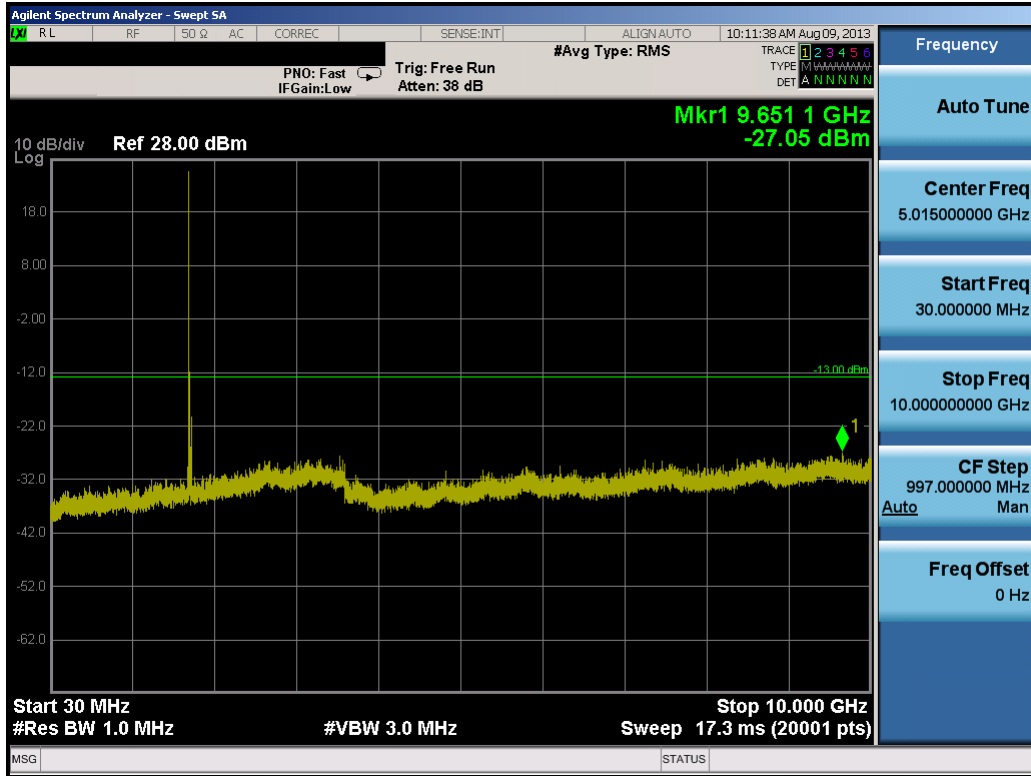


Plot 8-47. Conducted Spurious Plot (20.0MHz QPSK – RB Size 1, RB Offset 0– Low Channel)

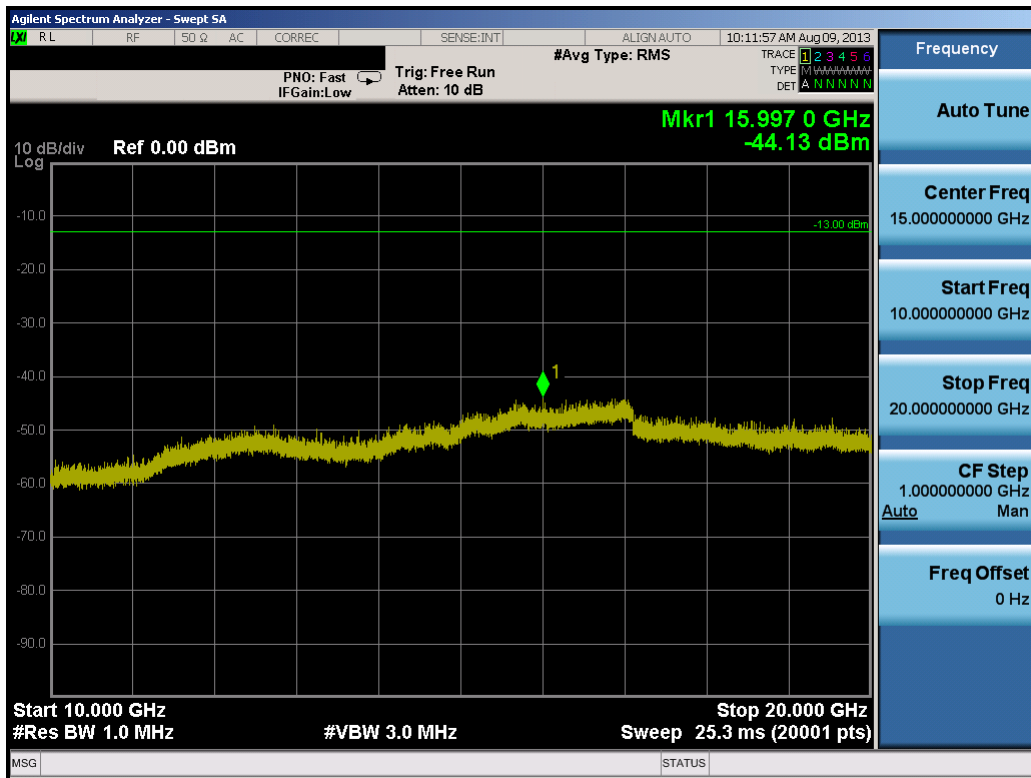


Plot 8-48. Conducted Spurious Plot (20.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 63 of 68

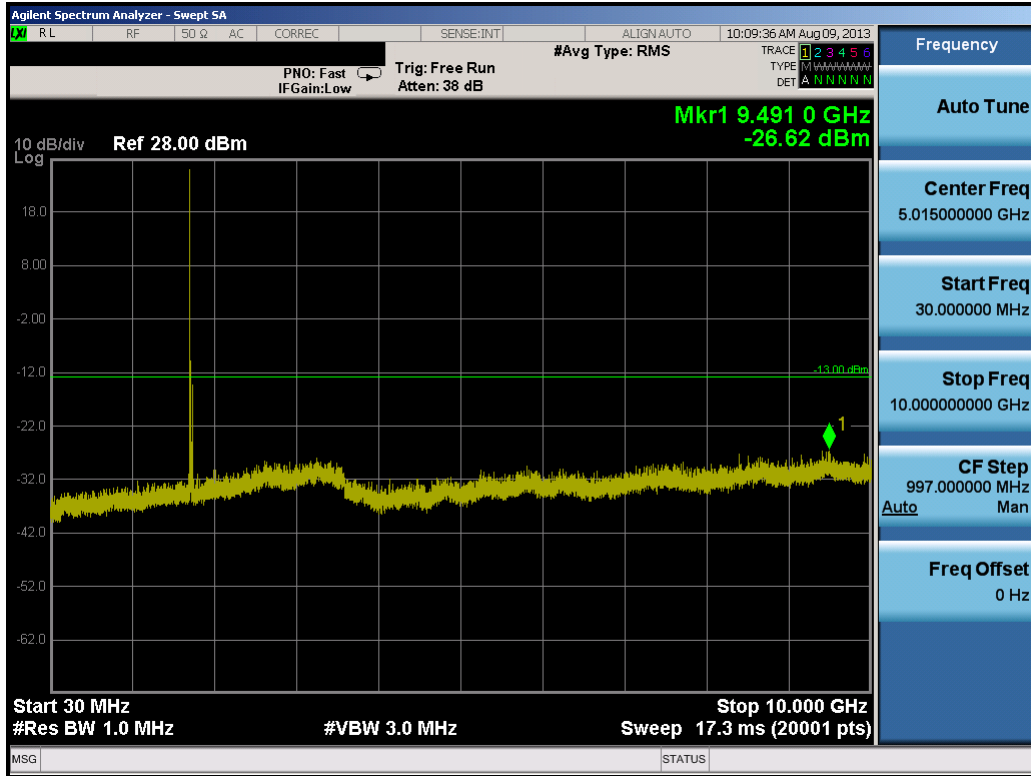


Plot 8-49. Conducted Spurious Plot (20.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

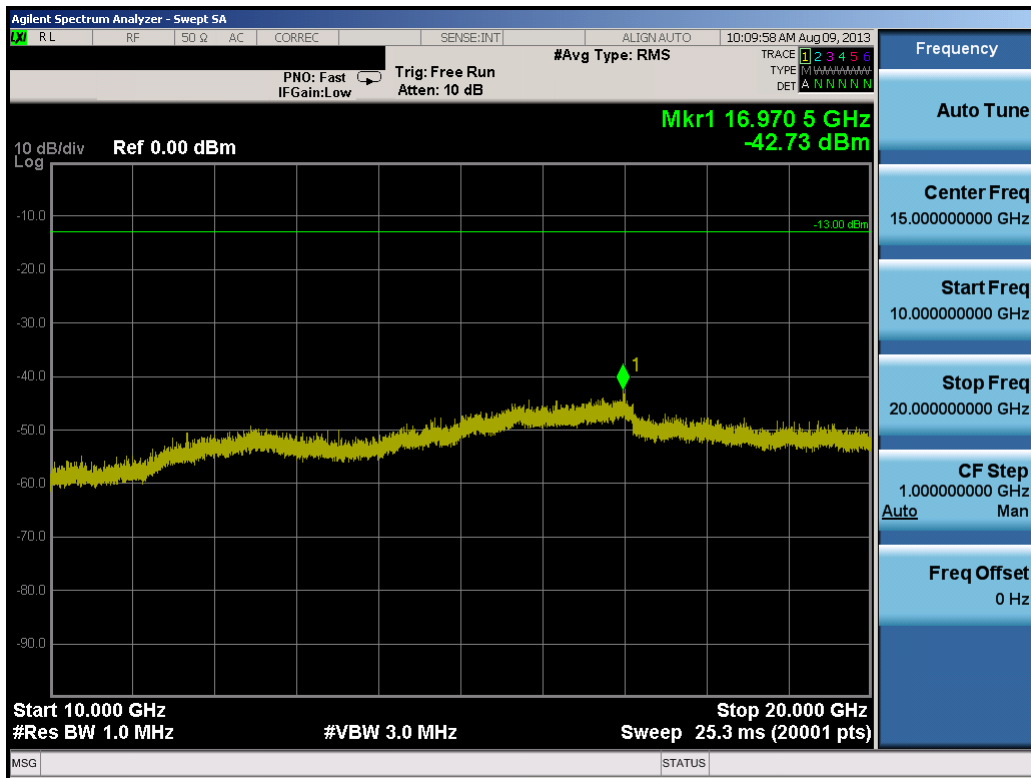


Plot 8-50. Conducted Spurious Plot (20.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 64 of 68

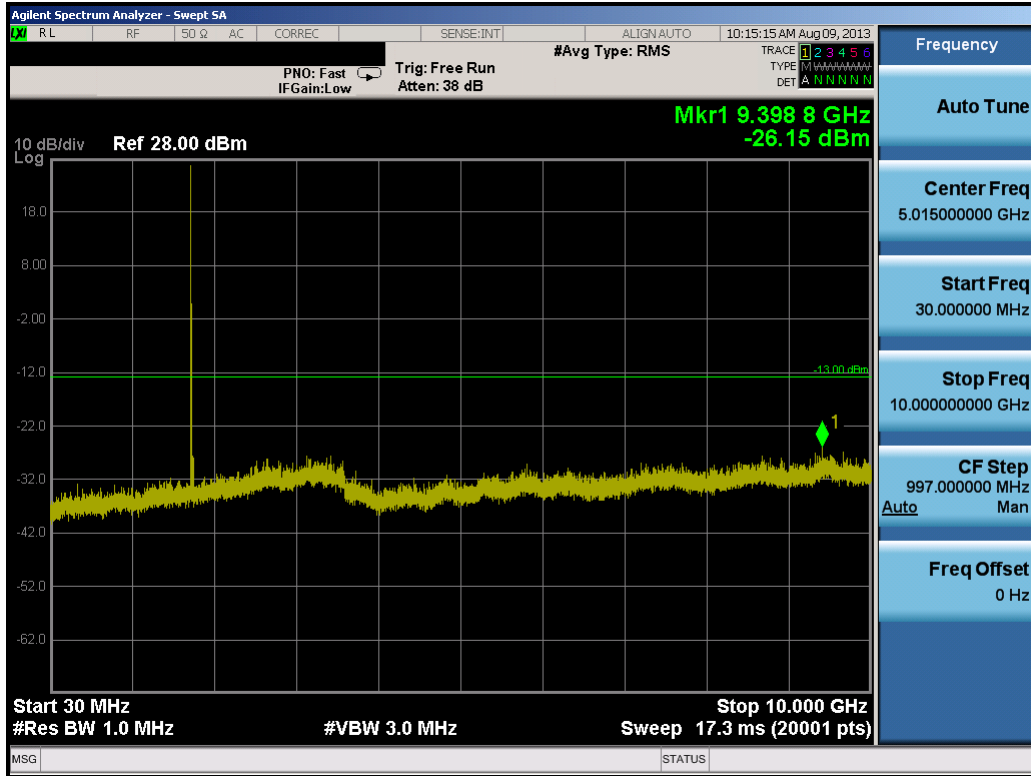


Plot 8-51. Conducted Spurious Plot (20.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

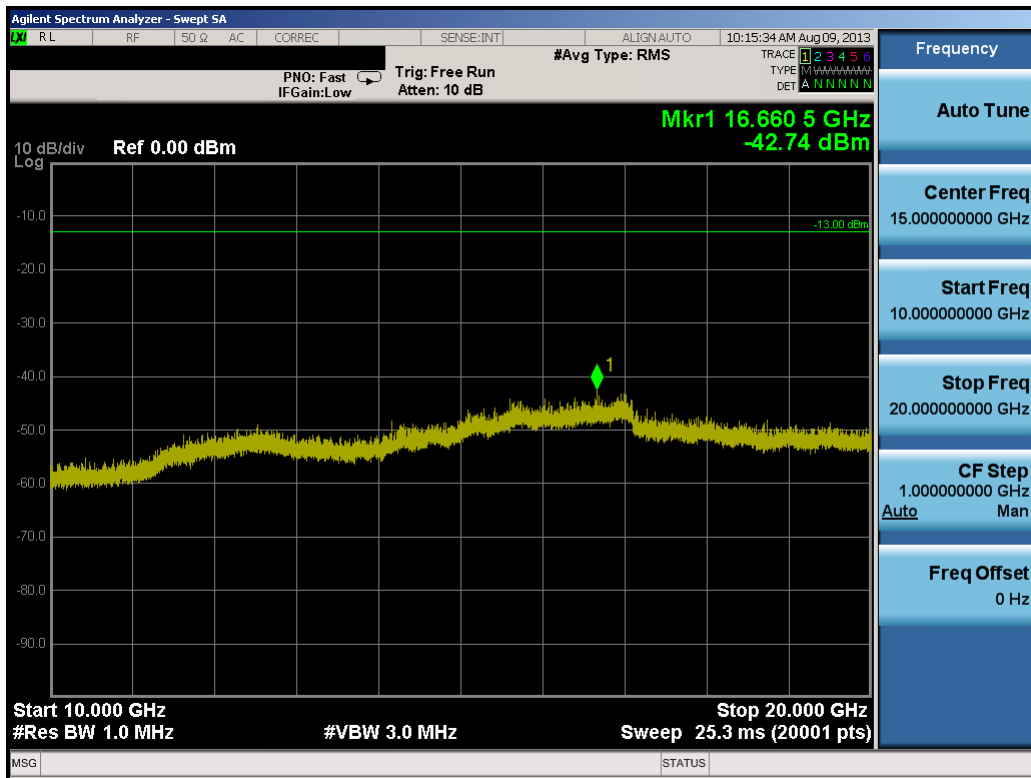


Plot 8-52. Conducted Spurious Plot (20.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 65 of 68

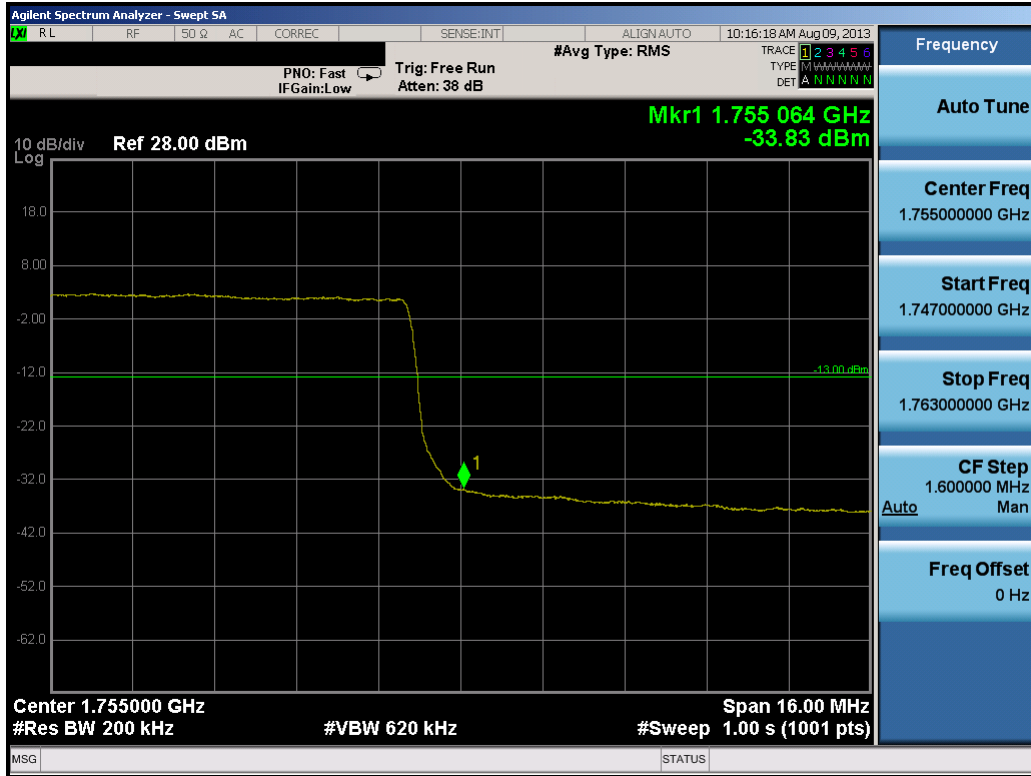


Plot 8-53. Upper Band Edge Plot (20.0MHz QPSK – RB Size 100)

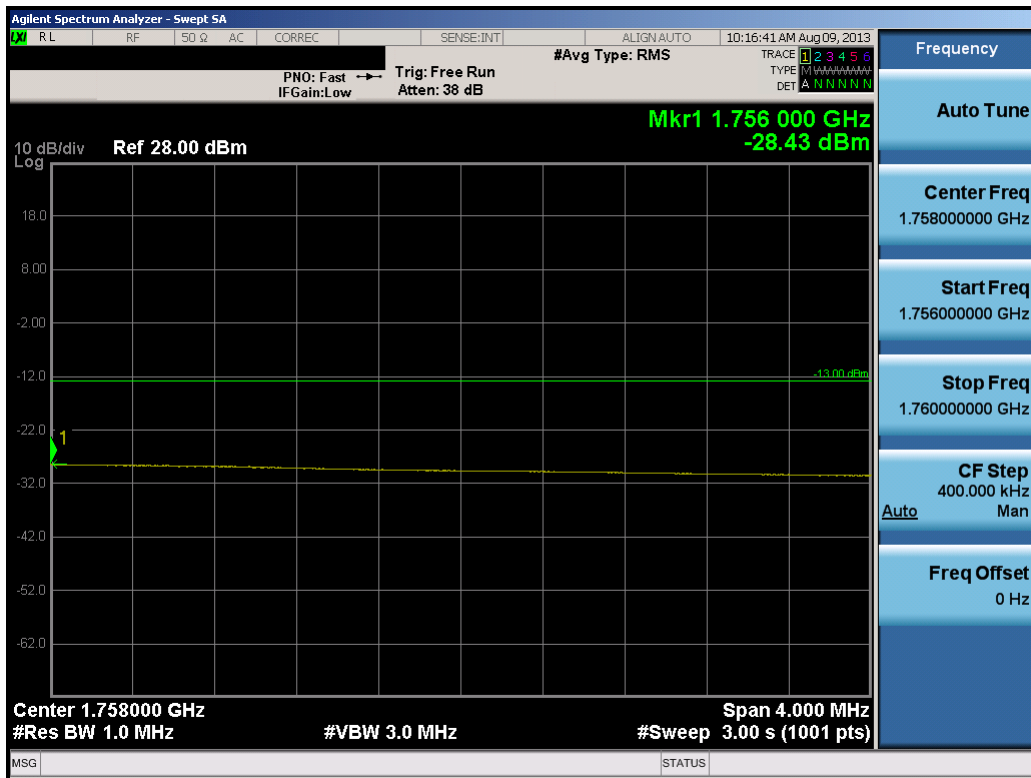


Plot 8-54. Upper Extended Band Edge Plot (20.0MHz QPSK – RB Size 100)

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 66 of 68

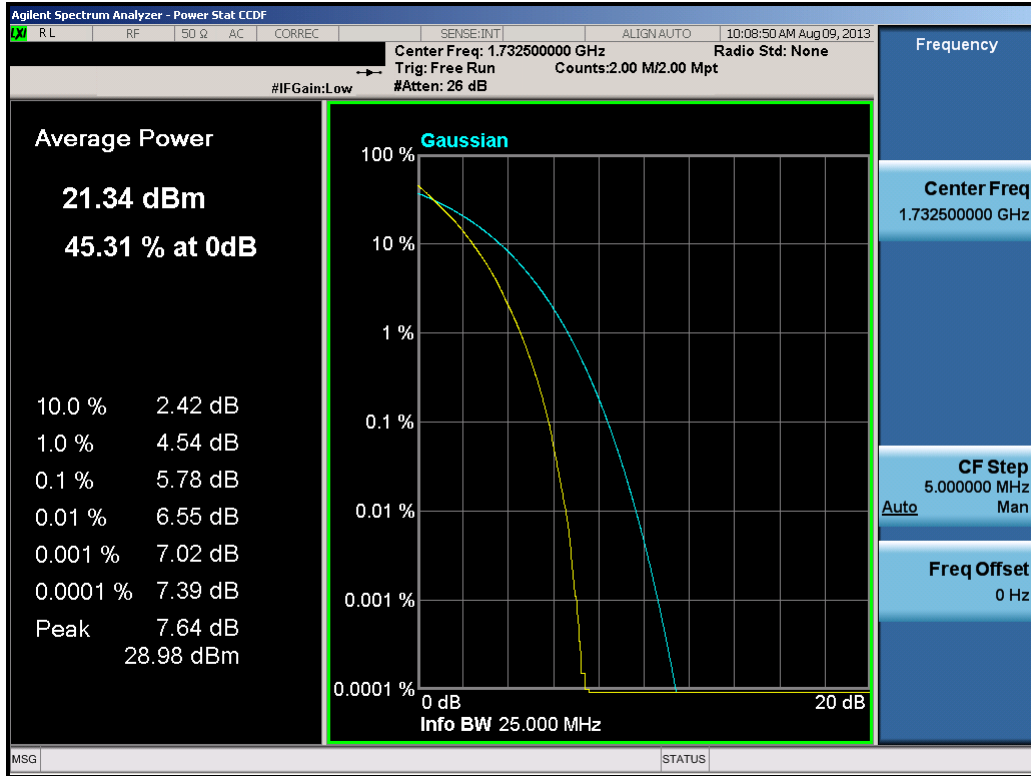

Plot 8-55. PAR Plot (20.0MHz QPSK – RB Size 100)

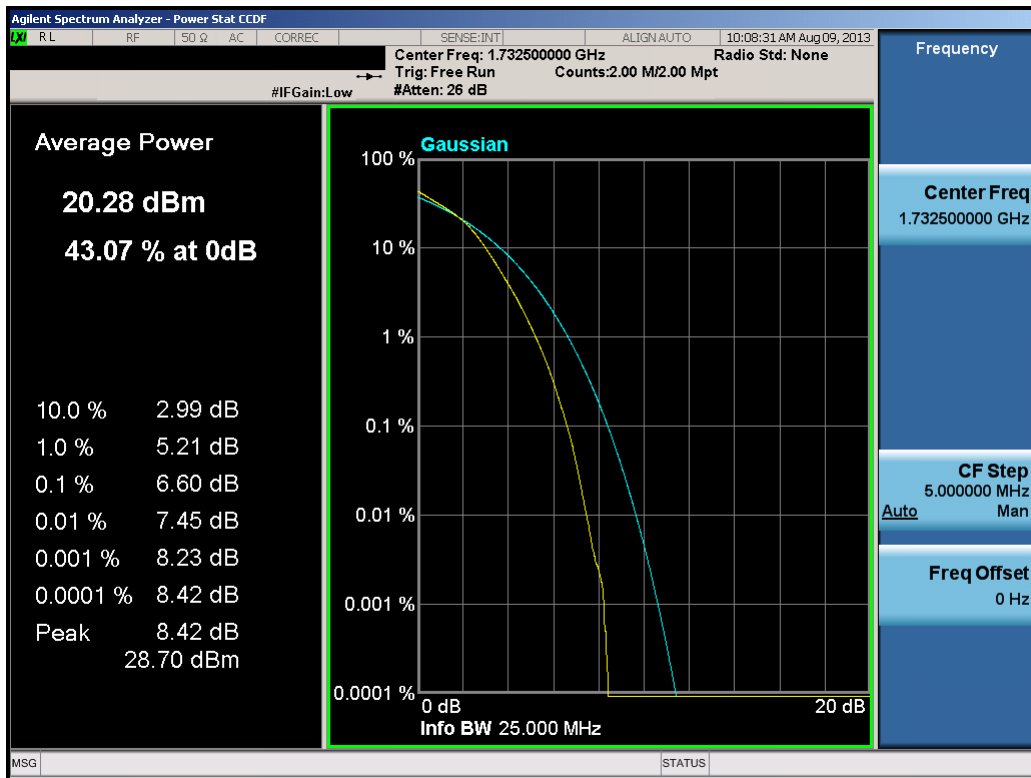



Plot 8-56. PAR Plot (20.0MHz 16-QAM – RB Size 100)

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 67 of 68

9.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMN900V** complies with all the requirements of Parts 2, 27 of the FCC rules for LTE operation only.

FCC ID: A3LSMN900V		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1307301506.A3L	Test Dates: August 9 - 17, 2013	EUT Type: Portable Handset		Page 68 of 68