



Samsung Electronics Co., LTD.  
 129, Samsung-ro, Yeongtong-gu  
 Suwon-City, Gyeonggi-do, 443-742, Korea

Date: JULY 26, 2013  
 PCTEST TCB/CB  
 Div. of PCTEST Engineering Lab., Inc.  
 6660-B Dobbin Road  
 Columbia, MD 21045

Subject: Samsung Electronics Co., Ltd.  
 FCC ID: A3LSMN900V

To Whom it May Concern

We attest the following regarding FCC ID: A3LSMN900V

1. MPR is permanently implemented for all channel BWs, modulations, frequency bands and RB sizes:  
 Supported channel BWs, modulations, frequency bands:
  - a. LTE Band 13 (Channel BW 10 MHz)/QPSK & 16QAM
  - b. LTE Band 4 (Channel BW 5,10,15,20 MHz)/QPSK & 16QAM
2. MPR is implemented per 3GPP TS 36.101. With the MPR permanently implemented, this device will never operate over than 23.5 dBm in QPSK and 16QAM.
3. We confirm the specific MPR targets and tolerances shown below

1) These are the LTE MPR Targets when power reduction is not activated

Band	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Target MPR [dB]	Maximum MPR Allowed per 3GPP [dB]
LTE Band 13	10	QPSK	1	0	0	0
	10	QPSK	1	25	0	0
	10	QPSK	1	49	0	0
	10	QPSK	25	0	1	0-1
	10	QPSK	25	12	1	0-1
	10	QPSK	25	24	1	0-1
	10	QPSK	50	0	1	0-1
	10	16-QAM	1	0	1	0-1
	10	16-QAM	1	25	1	0-1
	10	16-QAM	1	49	1	0-1
	10	16-QAM	25	0	2	0-2
	10	16-QAM	25	12	2	0-2
	10	16-QAM	25	24	2	0-2
10	16-QAM	50	0	2	0-2	

2) These are the LTE MPR Targets when power reduction is activated

Band	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Target MPR [dB]	Maximum MPR Allowed per 3GPP [dB]
LTE Band 13	10	QPSK	1	0	0	0
	10	QPSK	1	25	0	0

	10	QPSK	1	49	0	0
	10	QPSK	25	0	0	0-1
	10	QPSK	25	12	0	0-1
	10	QPSK	25	24	0	0-1
	10	QPSK	50	0	0	0-1
	10	16-QAM	1	0	0	0-1
	10	16-QAM	1	25	0	0-1
	10	16-QAM	1	49	0	0-1
	10	16-QAM	25	0	0	0-2
	10	16-QAM	25	12	0	0-2
	10	16-QAM	25	24	0	0-2
	10	16-QAM	50	0	0	0-2

3) The LTE MPR Targets for Band 4 are:

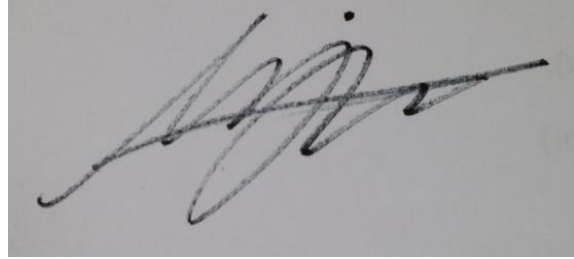
Band	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Target MPR [dB]	Maximum MPR Allowed per 3GPP [dB]
LTE Band 4	5	QPSK	1	0	0	0
	5	QPSK	1	12	0	0
	5	QPSK	1	24	0	0
	5	QPSK	12	0	1	0-1
	5	QPSK	12	6	1	0-1
	5	QPSK	12	12	1	0-1
	5	QPSK	25	0	1	0-1
	5	16-QAM	1	0	1	0-1
	5	16-QAM	1	12	1	0-1
	5	16-QAM	1	24	1	0-1
	5	16-QAM	12	0	2	0-2
	5	16-QAM	12	6	2	0-2
	5	16-QAM	12	12	2	0-2
	5	16-QAM	25	0	2	0-2
	10	QPSK	1	0	0	0
	10	QPSK	1	25	0	0
	10	QPSK	1	49	0	0
	10	QPSK	25	0	1	0-1
	10	QPSK	25	12	1	0-1
	10	QPSK	25	24	1	0-1
	10	QPSK	50	0	1	0-1
	10	16-QAM	1	0	1	0-1
	10	16-QAM	1	25	1	0-1
	10	16-QAM	1	49	1	0-1
	10	16-QAM	25	0	2	0-2
	10	16-QAM	25	12	2	0-2
	10	16-QAM	25	24	2	0-2
10	16-QAM	50	0	2	0-2	
15	QPSK	1	0	0	0	

15	QPSK	1	25	0	0
15	QPSK	1	49	0	0
15	QPSK	25	0	1	0-1
15	QPSK	25	12	1	0-1
15	QPSK	25	24	1	0-1
15	QPSK	50	0	1	0-1
15	16-QAM	1	0	1	0-1
15	16-QAM	1	25	1	0-1
15	16-QAM	1	49	1	0-1
15	16-QAM	25	0	2	0-2
15	16-QAM	25	12	2	0-2
15	16-QAM	25	24	2	0-2
15	16-QAM	50	0	2	0-2
20	QPSK	1	0	0	0
20	QPSK	1	25	0	0
20	QPSK	1	49	0	0
20	QPSK	25	0	1	0-1
20	QPSK	25	12	1	0-1
20	QPSK	25	24	1	0-1
20	QPSK	50	0	1	0-1
20	16-QAM	1	0	1	0-1
20	16-QAM	1	25	1	0-1
20	16-QAM	1	49	1	0-1
20	16-QAM	25	0	2	0-2
20	16-QAM	25	12	2	0-2
20	16-QAM	25	24	2	0-2
20	16-QAM	50	0	2	0-2

4. A-MPR was disabled for all SAR test samples for SAR testing purposes only.
5. This device implements LTE power reduction for SAR compliance when operating in an SVLTE connection. The power reduction description contains more information about the power reduction mechanism
6. We attest to the Simultaneous Tx listed on Operational Description to be accurate and furthermore, any other simultaneous Tx combinations not listed on the SAR report are not supported by software/hardware design.

Should you have any questions or comments concerning the above, please contact the undersigned.

Sincerely,

A handwritten signature in black ink on a light gray background. The signature is stylized and cursive, appearing to read 'Jun Haeng Lee'.

---

**Engineer : Jun Haeng Lee**

**Samsung Electronics CO. LTD**

**TEL: +82-301-0587**

**E-mail: [junhaeng.lee@samsung.com](mailto:junhaeng.lee@samsung.com)**