



## MEASUREMENT REPORT FCC Part 22, 24, 27 LTE

**Applicant Name:**  
 Samsung Electronics, Co. Ltd.  
 129, Samsung-ro, Maetan dong,  
 Yeongtong-gu, Suwon-si  
 Gyeonggi-do 443-742, Korea

**Date of Testing:**  
 09/08 - 09/11/2013  
**Test Site/Location:**  
 PCTEST Lab., Columbia, MD, USA  
**Test Report Serial No.:**  
 0Y1309041799.A3L

<b>FCC ID :</b>	<b>A3LSMN900W8</b>
<b>APPLICANT:</b>	<b>SAMSUNG ELECTRONICS, CO. LTD.</b>

**FCC Classification:** PCS Licensed Transmitter Held to Ear (PCE)  
**FCC Rule Part(s):** §2; §22; §24; §27  
**EUT Type:** Portable Handset  
**Model(s):** SM-N900W8  
**Test Device Serial No.:** *identical prototype* [S/N: EMC1]  
**Class II Permissive Change:** Please see FCC change documents.  
**Original Grant Date:** 09/11/2013

Mode	Tx Frequency (MHz)	Emission Designator	Modulation	ERP/EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE Band 17	706.5 - 713.5	4M52G7D	QPSK	0.075	18.72
LTE Band 17	706.5 - 713.5	4M53W7D	16QAM	0.057	17.54
LTE Band 17	709 - 711	8M95G7D	QPSK	0.077	18.84
LTE Band 17	709 - 711	8M97W7D	16QAM	0.059	17.74
LTE Band 5	826.5 - 846.5	4M52G7D	QPSK	0.044	16.43
LTE Band 5	826.5 - 846.5	4M53W7D	16QAM	0.034	15.36
LTE Band 5	829 - 844	9M02G7D	QPSK	0.041	16.09
LTE Band 5	829 - 844	8M99W7D	16QAM	0.034	15.25
LTE Band 4	1712.5 - 1752.5	4M52G7D	QPSK	0.168	22.26
LTE Band 4	1712.5 - 1752.5	4M53W7D	16QAM	0.126	21.00
LTE Band 4	1715 - 1750	8M97G7D	QPSK	0.157	21.97
LTE Band 4	1715 - 1750	8M98W7D	16QAM	0.123	20.89
LTE Band 4	1717.5 - 1747.5	13M4G7D	QPSK	0.167	22.22
LTE Band 4	1717.5 - 1747.5	13M5W7D	16QAM	0.116	20.63
LTE Band 4	1720 - 1745	18M0G7D	QPSK	0.189	22.77
LTE Band 4	1720 - 1745	17M9W7D	16QAM	0.144	21.57
LTE Band 2	1852.5 - 1907.5	4M51G7D	QPSK	0.242	23.83
LTE Band 2	1852.5 - 1907.5	4M52W7D	16QAM	0.172	22.35
LTE Band 2	1855 - 1905	8M97G7D	QPSK	0.211	23.25
LTE Band 2	1855 - 1905	8M98W7D	16QAM	0.161	22.07
LTE Band 2	1857.5 - 1902.5	13M4G7D	QPSK	0.225	23.53
LTE Band 2	1857.5 - 1902.5	13M4W7D	16QAM	0.160	22.05
LTE Band 2	1860 - 1900	17M9G7D	QPSK	0.192	22.83
LTE Band 2	1860 - 1900	17M9W7D	16QAM	0.150	21.76

**Note:** Emission Designator data shown above was determined the original device testing on August 7, 2013.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested. I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



  
 Ransly Ortaez  
 President




<b>FCC ID:</b> A3LSMN900W8		<b>FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1309041799.A3L	<b>Test Dates:</b> 09/08 - 09/11/2013	<b>EUT Type:</b> Portable Handset	Page 1 of 31	

# T A B L E O F C O N T E N T S

FCC PART 22, 24, 27 MEASUREMENT REPORT .....		3
1.0 INTRODUCTION .....		4
1.1 SCOPE .....		4
1.2 TESTING FACILITY .....		4
2.0 PRODUCT INFORMATION .....		5
2.1 EQUIPMENT DESCRIPTION .....		5
2.2 DEVICE CAPABILITIES .....		5
2.3 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS .....		5
2.4 LABELING REQUIREMENTS .....		5
3.0 DESCRIPTION OF TESTS .....		6
3.1 MEASUREMENT PROCEDURE .....		6
3.2 BLOCK A FREQUENCY RANGE .....		6
3.3 CELLULAR - BASE FREQUENCY BLOCKS .....		6
3.4 CELLULAR - MOBILE FREQUENCY BLOCKS .....		6
3.5 PCS - BASE FREQUENCY BLOCKS .....		7
3.6 PCS - MOBILE FREQUENCY BLOCKS .....		7
3.7 AWS - BASE FREQUENCY BLOCKS .....		7
3.8 AWS - MOBILE FREQUENCY BLOCKS .....		7
3.9 RADIATED POWER AND RADIATED SPURIOUS EMISSIONS .....		8
4.0 TEST EQUIPMENT CALIBRATION DATA .....		9
5.0 SAMPLE CALCULATIONS .....		10
6.0 TEST RESULTS .....		11
6.1 SUMMARY .....		11
6.2 EFFECTIVE RADIATED POWER (ERP) .....		12
6.3 EQUIVALENT ISOTROPIC RADIATED POWER (EIRP) .....		13
6.4 BAND 17 RADIATED SPURIOUS EMISSIONS .....		15
6.5 BAND 5 RADIATED SPURIOUS EMISSIONS .....		19
6.6 BAND 4 RADIATED SPURIOUS EMISSIONS .....		23
6.7 BAND 2 RADIATED SPURIOUS EMISSIONS .....		27
7.0 CONCLUSION .....		31

<b>FCC ID:</b> A3LSMN900W8		<b>FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1309041799.A3L	<b>Test Dates:</b> 09/08 - 09/11/2013	<b>EUT Type:</b> Portable Handset	Page 2 of 31	



# MEASUREMENT REPORT

## FCC Part 22, 24, 27




### §2.1033 General Information



**APPLICANT:** Samsung Electronics, Co. Ltd.  
**APPLICANT ADDRESS:** 129, Samsung-ro, Maetan dong,  
 Yeongtong-gu, Suwon-si, Gyeonggi-do 443-742, Korea  
**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.  
**TEST SITE ADDRESS:** 7185 Oakland Mills Road, Columbia, MD 21045 USA  
**FCC RULE PART(S):** §2; §22; §24; §27  
**BASE MODEL:** SM-N900W8  
**FCC ID:** A3LSMN900W8  
**FCC CLASSIFICATION:** PCS Licensed Transmitter Held to Ear (PCE)  
**FREQUENCY TOLERANCE:** ±0.00025 % (2.5 ppm)  
**Test Device Serial No.:** EMC1  Production  Pre-Production  Engineering  
**DATE(S) OF TEST:** 09/08 - 09/11/2013  
**TEST REPORT S/N:** 0Y1309041799.A3L

### Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



FCC ID: A3LSMN900W8		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309041799.A3L	Test Dates: 09/08 - 09/11/2013	EUT Type: Portable Handset	Page 3 of 31	

# 1.0 INTRODUCTION

## 1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

## 1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on February 15, 2012.

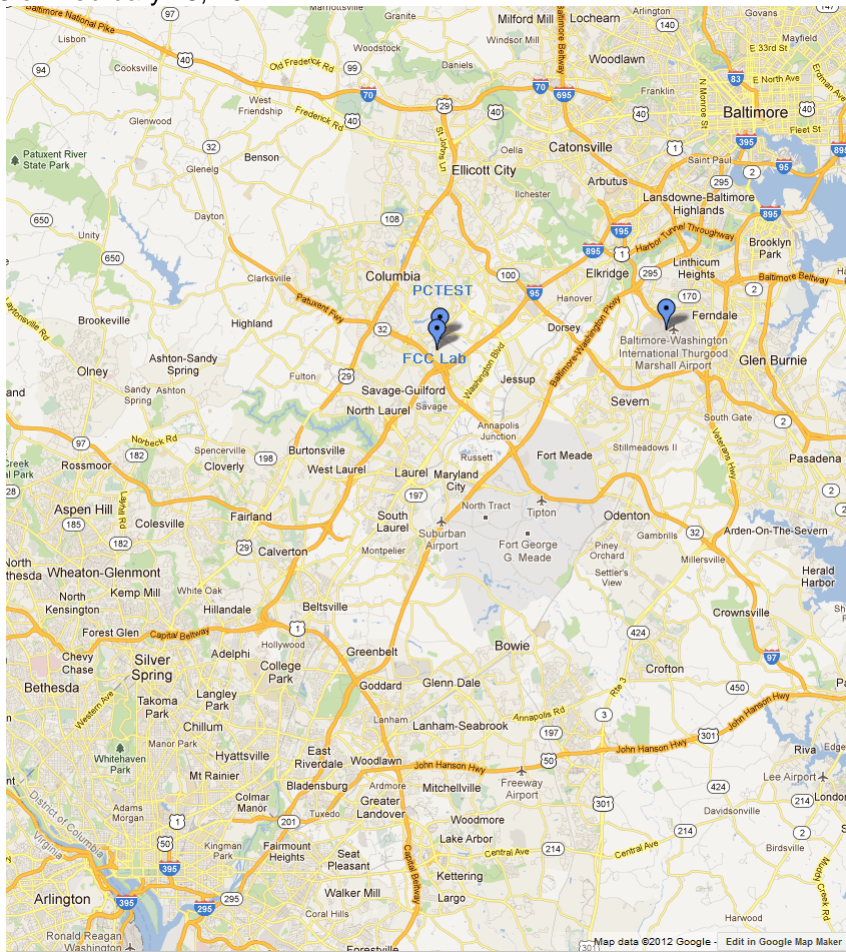



Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

<b>FCC ID:</b> A3LSMN900W8		<b>FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1309041799.A3L	<b>Test Dates:</b> 09/08 - 09/11/2013		<b>EUT Type:</b> Portable Handset	

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMN900W8**. The test data contained in this report pertains only to the emissions due to the EUT's LTE function.

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Band 2(5/10/15/20MHz BW), 4(5/10/15/20MHz BW), 5(5/10MHz BW), 17(5/10/15/20MHz BW) LTE, 802.11a/b/g/n/ac WLAN (DTS/NII), Bluetooth (1x,EDR, LE), NFC, ANT+

This device also supports wireless charging capabilities. Additional spurious emission testing was performed per KDB 648474 D03 v01r02 and the additional worst case emissions are reported herein and identified as WCC. The handset was placed on the verified charging pad under normal conditions and in a simulated call configuration. Only worst case emissions are shown in this report.


### 2.3 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

### 2.4 Labeling Requirements

Per 2.925

The FCC identifier shall be permanently affixed to the equipment and shall be readily visible to the purchaser at the time of purchase.

FCC ID: A3LSMN900W8		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309041799.A3L	Test Dates: 09/08 - 09/11/2013	EUT Type: Portable Handset	Page 5 of 31	

## 3.0 DESCRIPTION OF TESTS

### 3.1 Measurement Procedure


The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-C-2004) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168) were used in the measurement of the **Samsung Portable Handset FCC ID: A3LSMN900W8**.

### 3.2 Block A Frequency Range §27.5(c)

698-746 MHz band. The following frequencies are available for licensing pursuant to this part in the 698-746 MHz band: (1) Three paired channel blocks of 12 megahertz each are available for assignment as follows:

Block A: 698-704 MHz and 728-734 MHz;  
 Block B: 704-710 MHz and 734-740 MHz; and  
 Block C: 710-716 MHz and 740-746 MHz.


### 3.3 Cellular - Base Frequency Blocks §24.905

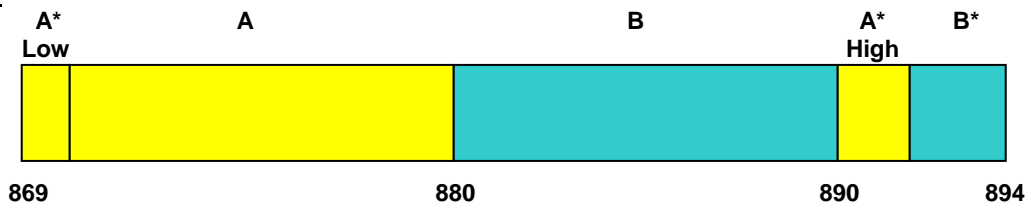

**BLOCK 1:** 869 – 880 MHz (A\* Low + A)  
**BLOCK 2:** 880 – 890 MHz (B)



**BLOCK 3:** 890 – 891.5 MHz (A\* High)  
**BLOCK 4:** 891.5 – 894 MHz (B\*)
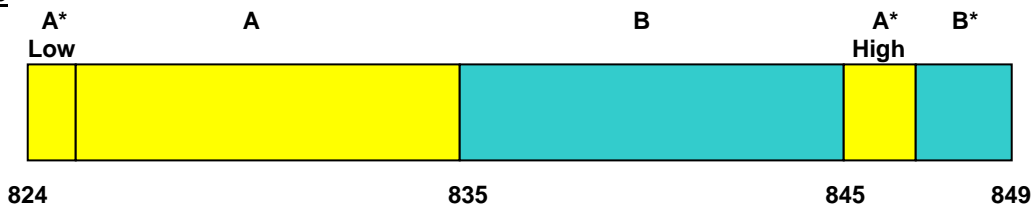
### 3.4 Cellular - Mobile Frequency Blocks §24.905




**BLOCK 1:** 824 – 835 MHz (A\* Low + A)  
**BLOCK 2:** 835 – 845 MHz (B)

**BLOCK 3:** 845 – 846.5 MHz (A\* High)  
**BLOCK 4:** 846.5 – 849 MHz (B\*)

FCC ID: A3LSMN900W8		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309041799.A3L	Test Dates: 09/08 - 09/11/2013	EUT Type: Portable Handset	Page 6 of 31	

### 3.5 PCS - Base Frequency Blocks


§24.229

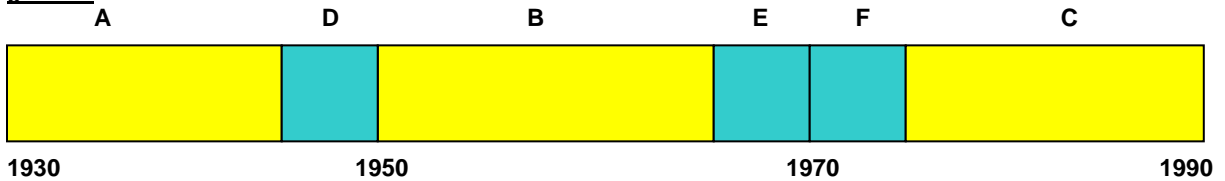

- BLOCK 1: 1930 – 1945 MHz (A)
- BLOCK 2: 1945 – 1950 MHz (D)
- BLOCK 3: 1950 – 1965 MHz (B)
- BLOCK 4: 1965 – 1970 MHz (E)
- BLOCK 5: 1970 – 1975 MHz (F)
- BLOCK 6: 1975 – 1990 MHz (C)

### 3.6 PCS - Mobile Frequency Blocks


§24.229

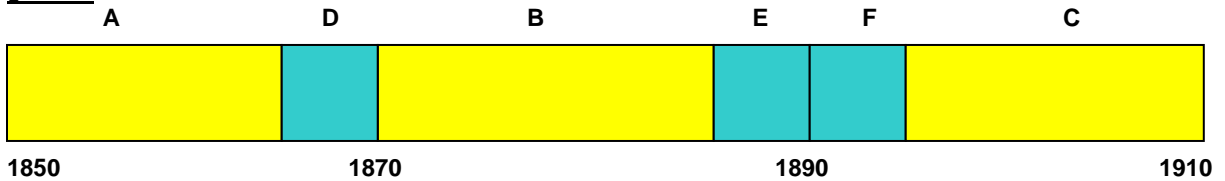

- BLOCK 1: 1850 – 1865 MHz (A)
- BLOCK 2: 1865 – 1870 MHz (D)
- BLOCK 3: 1870 – 1885 MHz (B)
- BLOCK 4: 1885 – 1890 MHz (E)
- BLOCK 5: 1890 – 1895 MHz (F)
- BLOCK 6: 1895 – 1910 MHz (C)

### 3.7 AWS - Base Frequency Blocks


§27.5(h)

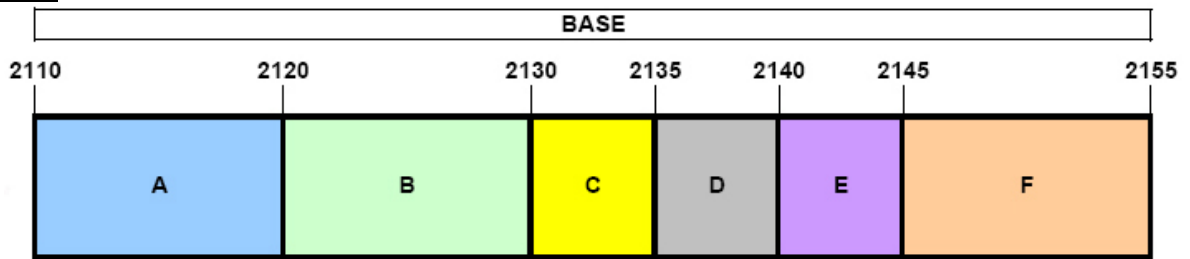



- BLOCK 1: 2110 – 2120 MHz (A)
- BLOCK 2: 2120 – 2130 MHz (B)
- BLOCK 3: 2130 – 2135 MHz (C)
- BLOCK 4: 2135 – 2140 MHz (D)
- BLOCK 5: 2140 – 2145 MHz (E)
- BLOCK 6: 2145 – 2155 MHz (E)

### 3.8 AWS - Mobile Frequency Blocks

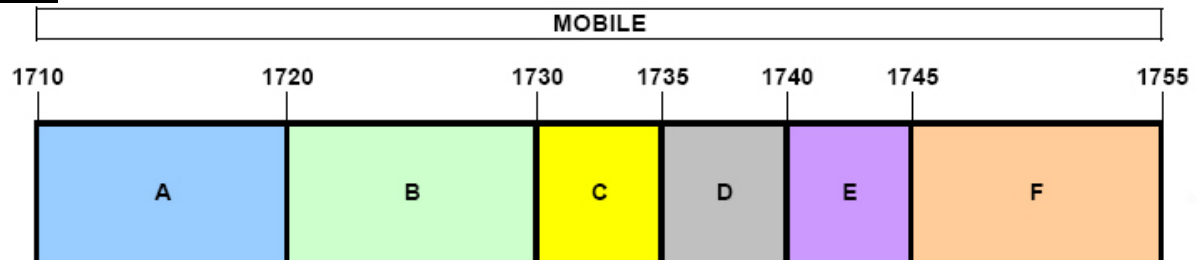§27.5(h)



- BLOCK 1: 1710 – 1720 MHz (A)
- BLOCK 2: 1720 – 1730 MHz (B)
- BLOCK 3: 1730 – 1735 MHz (C)
- BLOCK 4: 1735 – 1740 MHz (D)
- BLOCK 5: 1740 – 1745 MHz (E)
- BLOCK 6: 1745 – 1755 MHz (F)

FCC ID: A3LSMN900W8		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309041799.A3L	Test Dates: 09/08 - 09/11/2013	EUT Type: Portable Handset		Page 7 of 31

### 3.9 Radiated Power and Radiated Spurious Emissions

§2.1053 §22.913(a.2) §22.917(a) §24.232(c) §24.238(a) §27.50(c.10) §27.50(d.4) §27.53(g) §27.53(h) RSS-132(4.4) RSS-132(4.5.1) RSS-133(6.4) RSS-133(6.5.1) RSS-139(6.5.1)

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A ¾" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions' occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168.

Per the guidance of ANSI/TIA-603-C-2004, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [dBm] = P_g [dBm] - \text{cable loss} [dB] + \text{antenna gain} [dBd/dBi]$$

Where,  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g [dBm] - \text{cable loss} [dB]$ .

The calculated  $P_d$  levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of  $43 + 10\log_{10}(\text{Power} [Watts])$  specified in 22.917(a) and 24.238(a).

<b>FCC ID:</b> A3LSMN900W8		<b>FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1309041799.A3L				<b>Test Dates:</b> 09/08 - 09/11/2013

## 4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx1	Licensed Transmitter Cable Set	1/17/2013	Annual	1/17/2014	N/A
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	3/29/2013	Annual	3/29/2014	N/A
Agilent	8447D	Broadband Amplifier	5/31/2013	Annual	5/31/2014	2443A01900
Agilent	N9020A	MXA Signal Analyzer	10/9/2012	Annual	10/9/2013	US46470561
Espec	ESX-2CA	Environmental Chamber	4/16/2013	Annual	4/16/2014	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	7/24/2013	Biennial	7/24/2015	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	5/30/2012	Biennial	5/30/2014	135427
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	11/7/2012	Biennial	11/7/2014	128338
Mini-Circuits	VHF-1300+	High Pass Filter	1/21/2013	Annual	1/21/2014	30716
Mini-Circuits	VHF-3100+	High Pass Filter	1/17/2013	Annual	1/17/2014	30841
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	10/7/2011	Biennial	10/7/2013	103962
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	5/31/2013	Annual	5/31/2014	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	5/31/2013	Annual	5/31/2014	100040
Rohde & Schwarz	ESU26	EMI Test Receiver	2/25/2013	Annual	2/25/2014	100342
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	10/3/2011	Biennial	10/3/2013	91052523RX
Seekonk	NC-100	Torque Wrench (8" lb)	3/5/2012	Triennial	3/5/2015	N/A
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/26/2012	Biennial	1/26/2014	A051107

**Table 4-1. Test Equipment**

FCC ID: A3LSMN900W8		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309041799.A3L	Test Dates: 09/08 - 09/11/2013	EUT Type: Portable Handset	Page 9 of 31	

## 5.0 SAMPLE CALCULATIONS

### Emission Designator

#### QPSK Modulation

**Emission Designator = 8M62G7D**

LTE BW = 8.62 MHz  
 G = Phase Modulation  
 7 = Quantized/Digital Info  
 D = Amplitude/Angle Modulated

#### 16QAM Modulation



**Emission Designator = 8M45W7D**

LTE BW = 8.45 MHz  
 W = Amplitude/Angle Modulated  
 7 = Quantized/Digital Info  
 D = Combination (Audio/Data)

### Spurious Radiated Emission – LTE Band

#### **Example: Middle Channel LTE Mode 2<sup>nd</sup> Harmonic (1564 MHz)**

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was  $-81.0$  dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0$  dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of  $-30.9$  dBm yielding  $-24.80$  dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – ( $-24.80$ ).

FCC ID: A3LSMN900W8		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309041799.A3L	Test Dates: 09/08 - 09/11/2013	EUT Type: Portable Handset	Page 10 of 31	

## 6.0 TEST RESULTS

### 6.1 Summary



Company Name: Samsung Electronics, Co. Ltd.  
 FCC ID: A3LSMN900W8  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 Mode(s): LTE

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Result	Reference
<b>TRANSMITTER MODE (TX)</b>					
22.913(a.2)	Effective Radiated Power (Band 5)	< 7 Watts max. ERP	RADIATED	PASS	Section 6.2
27.50(c.10)	Effective Radiated Power (Band 17)	< 3 Watts max. ERP		PASS	Section 6.2
24.232(c) 27.50(h.2)	Equivalent Isotropic Radiated Power (Band 2 EBS)	< 2 Watts max. EIRP		PASS	Section 6.3
27.50(d.4)	Equivalent Isotropic Radiated Power (Band 4)	< 1 Watts max. EIRP		PASS	Section 6.3
2.1053 22.917(a) 24.238(a) 27.53(g) 27.53(h) 27.53(m)	Undesirable Emissions	> 43 + 10log <sub>10</sub> (P[Watts]) for all out-of-band emissions		PASS	Section 6.4, 6.5, 6.6, 6.7

**Table 6-1. Summary of Test Results**

**Notes:**

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.

FCC ID: A3LSMN900W8		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309041799.A3L	Test Dates: 09/08 - 09/11/2013	EUT Type: Portable Handset	Page 11 of 31	

## 6.2 Effective Radiated Power (ERP)

§22.913(a.2) §27.50(c.10) RSS-132(4.4)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]	Margin [dB]
706.50	5	QPSK	Standard	1/0	15.92	2.35	V	18.27	0.067	-16.50
710.00	5	QPSK	Standard	1/12	16.00	2.42	V	18.42	0.070	-16.35
713.50	5	QPSK	Standard	1/0	16.23	2.49	V	18.72	0.075	-16.05
706.50	5	16-QAM	Standard	1/0	14.81	2.35	V	17.16	0.052	-17.61
710.00	5	16-QAM	Standard	1/12	14.88	2.42	V	17.30	0.054	-17.47
713.50	5	16-QAM	Standard	1/0	15.05	2.49	V	17.54	0.057	-17.23
709.00	10	QPSK	Standard	1/25	16.49	2.35	V	<b>18.84</b>	0.077	-15.93
710.00	10	QPSK	Standard	1/0	16.24	2.42	V	18.66	0.074	-16.11
711.00	10	QPSK	Standard	1/25	16.03	2.49	V	18.52	0.071	-16.25
709.00	10	16-QAM	Standard	1/25	15.39	2.35	V	17.74	0.059	-17.03
710.00	10	16-QAM	Standard	1/0	15.02	2.42	V	17.44	0.056	-17.33
711.00	10	16-QAM	Standard	1/25	15.14	2.49	V	17.63	0.058	-17.14



Table 6-2. ERP Data (Band 17)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]	Margin [dB]
826.50	5	QPSK	Standard	1 / 24	11.66	4.68	V	16.34	0.043	-22.11
836.50	5	QPSK	Standard	1 / 0	11.61	4.82	V	<b>16.43</b>	0.044	-22.02
846.50	5	QPSK	Standard	1 / 0	11.06	4.96	V	16.02	0.040	-22.43
826.50	5	16-QAM	Standard	1 / 24	10.58	4.68	V	15.26	0.034	-23.19
836.50	5	16-QAM	Standard	1 / 0	10.54	4.82	V	15.36	0.034	-23.09
846.50	5	16-QAM	Standard	1 / 0	10.06	4.96	V	15.02	0.032	-23.43
829.00	10	QPSK	Standard	1 / 49	11.35	4.68	V	16.03	0.040	-22.42
836.50	10	QPSK	Standard	1 / 0	11.26	4.82	V	16.08	0.041	-22.37
844.00	10	QPSK	Standard	1 / 0	11.13	4.96	V	16.09	0.041	-22.36
829.00	10	16-QAM	Standard	1 / 49	10.41	4.68	V	15.09	0.032	-23.36
836.50	10	16-QAM	Standard	1 / 0	10.43	4.82	V	15.25	0.034	-23.20
844.00	10	16-QAM	Standard	1 / 0	10.18	4.96	V	15.14	0.033	-23.31

Table 6-3. ERP Data (Band 5)

### NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 20MHz BW 1RB/99 Offset for B7, 5MHz BW 1RB/0 Offset for B5, 20MHz BW 1RB/50 Offset for B4, and 5MHz BW 1RB/0 Offset for B2.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The data reported in the table above was measured in the worst case test setup.



FCC ID: A3LSMN900W8		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309041799.A3L	Test Dates: 09/08 - 09/11/2013	EUT Type: Portable Handset	Page 12 of 31	

### 6.3 Equivalent Isotropic Radiated Power (EIRP)

§24.232(c) §27.50(d.4) §27.50(h.2) RSS-133(6.4) RSS-139(6.4)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	Margin [dB]
1712.50	5	QPSK	Standard	1/12	12.37	9.89	H2	22.26	0.168	-7.74
1732.50	5	QPSK	Standard	1/12	12.23	9.85	H2	22.08	0.161	-7.92
1752.50	5	QPSK	Standard	1/0	11.93	9.80	H2	21.73	0.149	-8.27
1712.50	5	16-QAM	Standard	1/12	11.11	9.89	H2	21.00	0.126	-9.00
1732.50	5	16-QAM	Standard	1/12	11.14	9.85	H2	20.99	0.126	-9.01
1752.50	5	16-QAM	Standard	1/0	10.78	9.80	H2	20.58	0.114	-9.42
1715.00	10	QPSK	Standard	1/50	11.96	9.89	H2	21.85	0.153	-8.15
1732.50	10	QPSK	Standard	1/50	12.12	9.85	H2	21.97	0.157	-8.03
1750.00	10	QPSK	Standard	1/50	11.78	9.80	H2	21.58	0.144	-8.42
1715.00	10	16-QAM	Standard	1/50	10.97	9.89	H2	20.86	0.122	-9.14
1732.50	10	16-QAM	Standard	1/50	11.04	9.85	H2	20.89	0.123	-9.11
1750.00	10	16-QAM	Standard	1/50	10.58	9.80	H2	20.38	0.109	-9.62
1717.50	15	QPSK	Standard	1/0	12.33	9.89	H2	22.22	0.167	-7.78
1732.50	15	QPSK	Standard	1/37	11.85	9.85	H2	21.70	0.148	-8.30
1747.50	15	QPSK	Standard	1/0	12.06	9.80	H2	21.86	0.154	-8.14
1717.50	15	16-QAM	Standard	1/0	10.52	9.89	H2	20.41	0.110	-9.59
1732.50	15	16-QAM	Standard	1/37	10.78	9.85	H2	20.63	0.116	-9.37
1747.50	15	16-QAM	Standard	1/0	10.80	9.80	H2	20.60	0.115	-9.40
1720.00	20	QPSK	Standard	1/0	12.84	9.89	H2	22.73	0.188	-7.27
1732.50	20	QPSK	Standard	1/50	12.92	9.85	H2	<b>22.77</b>	0.189	-7.23
1745.00	20	QPSK	Standard	1/50	12.73	9.80	H2	22.53	0.179	-7.47
1720.00	20	16-QAM	Standard	1/0	11.68	9.89	H2	21.57	0.144	-8.43
1732.50	20	16-QAM	Standard	1/50	11.25	9.85	H2	21.10	0.129	-8.90
1745.00	20	16-QAM	Standard	1/50	11.55	9.80	H2	21.35	0.137	-8.65

Table 6-4. EIRP Data (Band 4)



FCC ID: A3LSMN900W8	 <b>FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b> 		Reviewed by: Quality Manager
Test Report S/N: 0Y1309041799.A3L	Test Dates: 09/08 - 09/11/2013	EUT Type: Portable Handset	Page 13 of 31

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	Margin [dB]
1852.50	5	QPSK	Standard	1/0	13.55	9.59	H2	23.14	0.206	-9.87
1880.00	5	QPSK	Standard	1/12	13.75	9.53	H2	23.28	0.213	-9.73
1907.50	5	QPSK	Standard	1/0	14.35	9.48	H2	<b>23.83</b>	0.242	-9.18
1852.50	5	16-QAM	Standard	1/0	12.25	9.59	H2	21.84	0.153	-11.17
1880.00	5	16-QAM	Standard	1/12	12.70	9.53	H2	22.23	0.167	-10.78
1907.50	5	16-QAM	Standard	1/0	12.87	9.48	H2	22.35	0.172	-10.66
1855.00	10	QPSK	Standard	1/0	13.66	9.59	H2	23.25	0.211	-9.76
1880.00	10	QPSK	Standard	1/25	13.15	9.53	H2	22.68	0.185	-10.33
1905.00	10	QPSK	Standard	1/25	13.37	9.48	H2	22.85	0.193	-10.16
1855.00	10	16-QAM	Standard	1/0	12.48	9.59	H2	22.07	0.161	-10.94
1880.00	10	16-QAM	Standard	1/25	12.02	9.53	H2	21.55	0.143	-11.46
1905.00	10	16-QAM	Standard	1/25	12.12	9.48	H2	21.60	0.145	-11.41
1857.50	15	QPSK	Standard	1/37	13.58	9.59	H2	23.17	0.207	-9.84
1880.00	15	QPSK	Standard	1/37	13.31	9.53	H2	22.84	0.192	-10.17
1902.50	15	QPSK	Standard	1/37	14.05	9.48	H2	23.53	0.225	-9.48
1857.50	15	16-QAM	Standard	1/37	12.46	9.59	H2	22.05	0.160	-10.96
1880.00	15	16-QAM	Standard	1/37	12.13	9.53	H2	21.66	0.147	-11.35
1902.50	15	16-QAM	Standard	1/37	12.12	9.48	H2	21.60	0.145	-11.41
1860.00	20	QPSK	Standard	1/50	12.98	9.59	H2	22.57	0.181	-10.44
1880.00	20	QPSK	Standard	1/50	13.30	9.53	H2	22.83	0.192	-10.18
1900.00	20	QPSK	Standard	1/0	12.53	9.48	H2	22.01	0.159	-11.00
1860.00	20	16-QAM	Standard	1/50	11.77	9.59	H2	21.36	0.137	-11.65
1880.00	20	16-QAM	Standard	1/50	12.23	9.53	H2	21.76	0.150	-11.25
1900.00	20	16-QAM	Standard	1/0	12.12	9.48	H2	21.60	0.145	-11.41

**Table 6-5. EIRP Data (Band 2)**

**NOTES:**

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 20MHz BW 1RB/99 Offset for B7, 5MHz BW 1RB/0 Offset for B5, 20MHz BW 1RB/50 Offset for B4, and 5MHz BW 1RB/0 Offset for B2.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The data reported in the table above was measured in the worst case test setup.

FCC ID: A3LSMN900W8	 <b>FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b> 		Reviewed by: Quality Manager
Test Report S/N: 0Y1309041799.A3L	Test Dates: 09/08 - 09/11/2013	EUT Type: Portable Handset	Page 14 of 31

## 6.4 Band 17 Radiated Spurious Emissions §2.1053 §27.53(g)

### Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 709.00 MHz  
 MEASURED OUTPUT POWER: 18.84 dBm = 0.077 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  31.84 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1418.00	-51.08	2.41	-48.67	H	67.52
2127.00	-54.48	3.24	-51.24	H	70.09
2836.00	-78.89	4.60	-74.29	H	93.13
3545.00	-53.23	6.14	-47.10	H	65.94
4254.00	-79.50	7.15	-72.35	H	91.20
4963.00	-78.69	7.78	-70.91	H	89.75

Table 6-6. Radiated Spurious Data

#### NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 20MHz BW 1RB/99 Offset for B7, 5MHz BW 1RB/0 Offset for B5, 20MHz BW 1RB/50 Offset for B4, and 5MHz BW 1RB/0 Offset for B2.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the horizontal positioning. The data reported in the table above was measured in this test setup.

FCC ID: A3LSMN900W8		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309041799.A3L	Test Dates: 09/08 - 09/11/2013	EUT Type: Portable Handset	Page 15 of 31	

**Band 17 Radiated Spurious Measurements (continued)**  
**§2.1053 §27.53(g)**

**Field Strength of SPURIOUS Radiation**



OPERATING FREQUENCY: 710.00 MHz  
 MEASURED OUTPUT POWER: 18.66 dBm = 0.074 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  31.66 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1420.00	-50.84	2.48	-48.35	H	67.02
2130.00	-55.78	3.28	-52.50	H	71.16
2840.00	-78.84	4.62	-74.22	H	92.88
3550.00	-51.97	6.12	-45.86	H	64.52
4260.00	-79.53	7.18	-72.35	H	91.01
4970.00	-78.75	7.83	-70.92	H	89.58

**Table 6-7. Radiated Spurious Data**

**NOTES:**

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 20MHz BW 1RB/99 Offset for B7, 5MHz BW 1RB/0 Offset for B5, 20MHz BW 1RB/50 Offset for B4, and 5MHz BW 1RB/0 Offset for B2.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the horizontal positioning. The data reported in the table above was measured in this test setup.

FCC ID: A3LSMN900W8		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309041799.A3L	Test Dates: 09/08 - 09/11/2013	EUT Type: Portable Handset	Page 16 of 31	

**Band 17 Radiated Spurious Measurements (continued)**  
**§2.1053 §27.53(g)**

**Field Strength of SPURIOUS Radiation**



OPERATING FREQUENCY: 711.00 MHz  
 MEASURED OUTPUT POWER: 18.52 dBm = 0.071 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  31.52 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1422.00	-50.11	2.56	-47.55	H	66.07
2133.00	-55.43	3.33	-52.10	H	70.62
2844.00	-55.89	4.64	-51.25	H	69.77
3555.00	-51.02	6.09	-44.93	H	63.45
4266.00	-79.54	7.22	-72.32	H	90.84
4977.00	-78.81	7.88	-70.93	H	89.45

**Table 6-8. Radiated Spurious Data**

**NOTES:**

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 20MHz BW 1RB/99 Offset for B7, 5MHz BW 1RB/0 Offset for B5, 20MHz BW 1RB/50 Offset for B4, and 5MHz BW 1RB/0 Offset for B2.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the horizontal positioning. The data reported in the table above was measured in this test setup.

FCC ID: A3LSMN900W8		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309041799.A3L	Test Dates: 09/08 - 09/11/2013	EUT Type: Portable Handset	Page 17 of 31	

## Band 17 Radiated Spurious Measurements w/ WCC §2.1053 §27.53(g)

### Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 711.00 MHz  
 MEASURED OUTPUT POWER: 18.52 dBm = 0.071 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  31.52 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1422.00	-50.57	2.56	-48.01	H	66.53
2133.00	-55.29	3.33	-51.96	H	70.48
2844.00	-53.99	4.64	-49.35	H	67.87
3555.00	-53.90	6.09	-47.81	H	66.33
4266.00	-79.54	7.22	-72.32	H	90.84
4977.00	-78.81	7.88	-70.93	H	89.45

**Table 6-9. Radiated Spurious Data w/ WCC**

#### NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 20MHz BW 1RB/99 Offset for B7, 5MHz BW 1RB/0 Offset for B5, 20MHz BW 1RB/50 Offset for B4, and 5MHz BW 1RB/0 Offset for B2.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the horizontal positioning. The data reported in the table above was measured in this test setup.

FCC ID: A3LSMN900W8		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309041799.A3L	Test Dates: 09/08 - 09/11/2013	EUT Type: Portable Handset	Page 18 of 31	

## 6.5 Band 5 Radiated Spurious Emissions

### §2.1053 §22.917(a) RSS-132(4.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 826.50 MHz  
 MEASURED OUTPUT POWER: 16.34 dBm = 0.043 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  29.34 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1653.00	-51.64	3.72	-47.92	H	64.27
2479.50	-79.16	3.61	-75.55	H	91.89
3306.00	-79.94	5.64	-74.29	H	90.64
4132.50	-79.17	6.94	-72.23	H	88.57
4959.00	-78.76	7.84	-70.92	H	87.27
5785.50	-77.04	8.55	-68.49	H	84.83

Table 6-10. Radiated Spurious Data

### NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 20MHz BW 1RB/99 Offset for B7, 5MHz BW 1RB/0 Offset for B5, 20MHz BW 1RB/50 Offset for B4, and 5MHz BW 1RB/0 Offset for B2.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the horizontal positioning. The data reported in the table above was measured in this test setup.

FCC ID: A3LSMN900W8		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309041799.A3L	Test Dates: 09/08 - 09/11/2013	EUT Type: Portable Handset	Page 19 of 31	

**Band 5 Radiated Spurious Measurements (continued)**  
**§2.1053 §22.917(a) RSS-132(4.5.1)**

**Field Strength of SPURIOUS Radiation**


OPERATING FREQUENCY: 836.50 MHz  
 MEASURED OUTPUT POWER: 16.43 dBm = 0.044 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  29.43 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1673.00	-51.82	3.67	-48.15	H	64.59
2509.50	-79.11	3.65	-75.46	H	91.89
3346.00	-80.00	5.74	-74.26	H	90.70
4182.50	-79.33	7.04	-72.29	H	88.72
5019.00	-78.75	7.90	-70.85	H	87.28
5855.50	-76.73	8.51	-68.22	H	84.65

**Table 6-11. Radiated Spurious Data**

**NOTES:**

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 20MHz BW 1RB/99 Offset for B7, 5MHz BW 1RB/0 Offset for B5, 20MHz BW 1RB/50 Offset for B4, and 5MHz BW 1RB/0 Offset for B2.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the horizontal positioning. The data reported in the table above was measured in this test setup.

FCC ID: A3LSMN900W8		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309041799.A3L	Test Dates: 09/08 - 09/11/2013	EUT Type: Portable Handset	Page 20 of 31	

**Band 5 Radiated Spurious Measurements (continued)**  
**§2.1053 §22.917(a) RSS-132(4.5.1)**

**Field Strength of SPURIOUS Radiation**



OPERATING FREQUENCY: 846.50 MHz  
 MEASURED OUTPUT POWER: 16.02 dBm = 0.040 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  29.02 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1693.00	-50.03	3.62	-46.42	H	62.44
2539.50	-79.20	3.72	-75.49	H	91.51
3386.00	-80.06	5.83	-74.23	H	90.25
4232.50	-79.45	7.11	-72.34	H	88.36
5079.00	-78.59	7.93	-70.66	H	86.68
5925.50	-76.41	8.46	-67.95	H	83.97

**Table 6-12. Radiated Spurious Data**

**NOTES:**

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 20MHz BW 1RB/99 Offset for B7, 5MHz BW 1RB/0 Offset for B5, 20MHz BW 1RB/50 Offset for B4, and 5MHz BW 1RB/0 Offset for B2.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the horizontal positioning. The data reported in the table above was measured in this test setup.

FCC ID: A3LSMN900W8		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309041799.A3L	Test Dates: 09/08 - 09/11/2013	EUT Type: Portable Handset	Page 21 of 31	

**Band 5 Radiated Spurious Measurements w/ WCC**  
**§2.1053 §22.917(a) RSS-132(4.5.1)**

**Field Strength of SPURIOUS Radiation**


OPERATING FREQUENCY: 846.50 MHz  
 MEASURED OUTPUT POWER: 16.02 dBm = 0.040 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  29.02 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1693.00	-50.89	3.62	-47.28	H	63.30
2539.50	-79.20	3.72	-75.49	H	91.51
3386.00	-80.06	5.83	-74.23	H	90.25
4232.50	-79.45	7.11	-72.34	H	88.36
5079.00	-78.59	7.93	-70.66	H	86.68
5925.50	-76.41	8.46	-67.95	H	83.97

**Table 6-13. Radiated Spurious Data w/ WCC**

**NOTES:**

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 20MHz BW 1RB/99 Offset for B7, 5MHz BW 1RB/0 Offset for B5, 20MHz BW 1RB/50 Offset for B4, and 5MHz BW 1RB/0 Offset for B2.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the horizontal positioning. The data reported in the table above was measured in this test setup.

FCC ID: A3LSMN900W8		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309041799.A3L	Test Dates: 09/08 - 09/11/2013	EUT Type: Portable Handset	Page 22 of 31	

## 6.6 Band 4 Radiated Spurious Emissions

### §2.1053 §27.53(h) RSS-139(6.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1720.00 MHz  
 MEASURED OUTPUT POWER: 22.73 dBm = 0.188 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 20 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  35.73 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3440.00	-45.94	8.11	-37.82	H2	60.55
5160.00	-56.97	10.13	-46.85	H2	69.58
6880.00	-49.25	11.31	-37.93	H2	60.67
8600.00	-50.94	12.98	-37.96	H2	60.69
10320.00	-77.26	13.22	-64.04	H2	86.77
12040.00	-73.88	13.01	-60.87	H2	83.60

Table 6-14. Radiated Spurious Data

#### NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 20MHz BW 1RB/99 Offset for B7, 5MHz BW 1RB/0 Offset for B5, 20MHz BW 1RB/50 Offset for B4, and 5MHz BW 1RB/0 Offset for B2.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the horizontal positioning. The data reported in the table above was measured in this test setup.

FCC ID: A3LSMN900W8		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309041799.A3L	Test Dates: 09/08 - 09/11/2013	EUT Type: Portable Handset	Page 23 of 31	

**Band 4 Radiated Spurious Measurements (continued)**  
**§2.1053 §27.53(h) RSS-139(6.5.1)**

**Field Strength of SPURIOUS Radiation**



OPERATING FREQUENCY: 1732.50 MHz  
 MEASURED OUTPUT POWER: 22.77 dBm = 0.189 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 20 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  35.77 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3465.00	-50.97	8.23	-42.74	H2	65.51
5197.50	-53.98	10.18	-43.80	H2	66.57
6930.00	-40.64	11.41	-29.22	H2	51.99
8662.50	-52.65	13.00	-39.65	H2	62.42
10395.00	-77.18	13.15	-64.03	H2	86.80
12127.50	-73.57	13.00	-60.57	H2	83.34

**Table 6-15. Radiated Spurious Data**

**NOTES:**

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 20MHz BW 1RB/99 Offset for B7, 5MHz BW 1RB/0 Offset for B5, 20MHz BW 1RB/50 Offset for B4, and 5MHz BW 1RB/0 Offset for B2.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the horizontal positioning. The data reported in the table above was measured in this test setup.

FCC ID: A3LSMN900W8		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309041799.A3L	Test Dates: 09/08 - 09/11/2013	EUT Type: Portable Handset	Page 24 of 31	

**Band 4 Radiated Spurious Measurements (continued)**  
**§2.1053 §27.53(h) RSS-139(6.5.1)**

**Field Strength of SPURIOUS Radiation**



OPERATING FREQUENCY: 1745.00 MHz  
 MEASURED OUTPUT POWER: 22.53 dBm = 0.179 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 20 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  35.53 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3490.00	-48.86	8.32	-40.54	H2	63.08
5235.00	-54.42	10.20	-44.22	H2	66.75
6980.00	-43.71	11.48	-32.23	H2	54.77
8725.00	-52.00	12.97	-39.04	H2	61.57
10470.00	-76.84	13.04	-63.79	H2	86.33
12215.00	-73.37	13.03	-60.34	H2	82.87

**Table 6-16. Radiated Spurious Data**

**NOTES:**

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 20MHz BW 1RB/99 Offset for B7, 5MHz BW 1RB/0 Offset for B5, 20MHz BW 1RB/50 Offset for B4, and 5MHz BW 1RB/0 Offset for B2.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the horizontal positioning. The data reported in the table above was measured in this test setup.

FCC ID: A3LSMN900W8		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309041799.A3L	Test Dates: 09/08 - 09/11/2013	EUT Type: Portable Handset	Page 25 of 31	

**Band 4 Radiated Spurious Measurements w/ WCC**  
**§2.1053 §27.53(h) RSS-139(6.5.1)**

**Field Strength of SPURIOUS Radiation**



OPERATING FREQUENCY: 1720.00 MHz  
 MEASURED OUTPUT POWER: 22.73 dBm = 0.188 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 20 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  35.73 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3440.00	-43.54	8.11	-35.42	H	58.15
5160.00	-50.62	10.13	-40.50	H	63.23
6880.00	-48.77	11.31	-37.45	H	60.19
8600.00	-51.90	12.98	-38.92	H	61.65
10320.00	-77.26	13.22	-64.04	H	86.77
12040.00	-73.88	13.01	-60.87	H	83.60

**Table 6-17. Radiated Spurious Data w/ WCC**

**NOTES:**

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 20MHz BW 1RB/99 Offset for B7, 5MHz BW 1RB/0 Offset for B5, 20MHz BW 1RB/50 Offset for B4, and 5MHz BW 1RB/0 Offset for B2.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the horizontal positioning. The data reported in the table above was measured in this test setup.

FCC ID: A3LSMN900W8		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309041799.A3L	Test Dates: 09/08 - 09/11/2013	EUT Type: Portable Handset	Page 26 of 31	

## 6.7 Band 2 Radiated Spurious Emissions

### §2.1053 §24.238(a) RSS-133(6.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1852.50 MHz  
 MEASURED OUTPUT POWER: 23.14 dBm = 0.206 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  36.14 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3705.00	-36.17	8.30	-27.88	H	51.01
5557.50	-50.78	10.59	-40.20	H	63.34
7410.00	-47.46	11.96	-35.50	H	58.64
9262.50	-53.20	13.16	-40.04	H	63.18
11115.00	-75.48	13.25	-62.22	H	85.36
12967.50	-71.68	13.29	-58.39	H	81.53

Table 6-18. Radiated Spurious Data

### NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 20MHz BW 1RB/99 Offset for B7, 5MHz BW 1RB/0 Offset for B5, 20MHz BW 1RB/50 Offset for B4, and 5MHz BW 1RB/0 Offset for B2.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the horizontal positioning. The data reported in the table above was measured in this test setup.

FCC ID: A3LSMN900W8		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309041799.A3L	Test Dates: 09/08 - 09/11/2013	EUT Type: Portable Handset	Page 27 of 31	

**Band 2 Radiated Spurious Measurements (continued)**  
**§2.1053 §24.238(a) RSS-133(6.5.1)**

**Field Strength of SPURIOUS Radiation**



OPERATING FREQUENCY: 1880.00 MHz  
 MEASURED OUTPUT POWER: 23.28 dBm = 0.213 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  36.28 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-38.65	8.32	-30.33	H	53.61
5640.00	-53.84	10.67	-43.16	H	66.44
7520.00	-44.06	12.05	-32.00	H	55.29
9400.00	-53.33	13.16	-40.17	H	63.45
11280.00	-75.41	13.32	-62.09	H	85.37
13160.00	-71.42	13.47	-57.94	H	81.22

**Table 6-19. Radiated Spurious Data**

**NOTES:**

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 20MHz BW 1RB/99 Offset for B7, 5MHz BW 1RB/0 Offset for B5, 20MHz BW 1RB/50 Offset for B4, and 5MHz BW 1RB/0 Offset for B2.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the horizontal positioning. The data reported in the table above was measured in this test setup.

FCC ID: A3LSMN900W8		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309041799.A3L	Test Dates: 09/08 - 09/11/2013	EUT Type: Portable Handset	Page 28 of 31	

**Band 2 Radiated Spurious Measurements (continued)**  
**§2.1053 §24.238(a) RSS-133(6.5.1)**

**Field Strength of SPURIOUS Radiation**


OPERATING FREQUENCY: 1907.50 MHz  
 MEASURED OUTPUT POWER: 23.83 dBm = 0.242 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  36.83 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3815.00	-36.13	8.36	-27.77	H	51.60
5722.50	-54.52	10.73	-43.78	H	67.61
7630.00	-44.63	12.12	-32.52	H	56.35
9537.50	-52.51	13.14	-39.38	H	63.21
11445.00	-75.54	13.36	-62.19	H	86.02
13352.50	-71.37	13.47	-57.90	H	81.73

**Table 6-20. Radiated Spurious Data**

**NOTES:**

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 20MHz BW 1RB/99 Offset for B7, 5MHz BW 1RB/0 Offset for B5, 20MHz BW 1RB/50 Offset for B4, and 5MHz BW 1RB/0 Offset for B2.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the horizontal positioning. The data reported in the table above was measured in this test setup.

FCC ID: A3LSMN900W8		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309041799.A3L	Test Dates: 09/08 - 09/11/2013	EUT Type: Portable Handset	Page 29 of 31	

## Band 2 Radiated Spurious Measurements w/ WCC §2.1053 §24.238(a) RSS-133(6.5.1)

### Field Strength of SPURIOUS Radiation



OPERATING FREQUENCY: 1852.50 MHz  
 MEASURED OUTPUT POWER: 23.14 dBm = 0.206 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  36.14 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3705.00	-38.93	8.30	-30.64	H	53.77
5557.50	-53.77	10.59	-43.19	H	66.33
7410.00	-44.10	11.96	-32.14	H	55.28
9262.50	-54.77	13.16	-41.61	H	64.75
11115.00	-75.48	13.25	-62.22	H	85.36
12967.50	-71.68	13.29	-58.39	H	81.53

Table 6-21. Radiated Spurious Data w/ WCC



#### NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 20MHz BW 1RB/99 Offset for B7, 5MHz BW 1RB/0 Offset for B5, 20MHz BW 1RB/50 Offset for B4, and 5MHz BW 1RB/0 Offset for B2.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the horizontal positioning. The data reported in the table above was measured in this test setup.

FCC ID: A3LSMN900W8		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309041799.A3L	Test Dates: 09/08 - 09/11/2013	EUT Type: Portable Handset	Page 30 of 31	

## 7.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMN900W8** complies with all the requirements of Parts 2, 22, 24, 27 of the FCC rules for LTE operation only.

<b>FCC ID:</b> A3LSMN900W8	 <b>FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1309041799.A3L	<b>Test Dates:</b> 09/08 - 09/11/2013	<b>EUT Type:</b> Portable Handset	Page 31 of 31