



PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654

http://www.pctest.com



MEASUREMENT REPORT FCC Part 22 & 90

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:
4/30 - 6/13/2018
Test Site/Location:
PCTEST Lab. Columbia, MD, USA
Test Report Serial No.:
1M1804270086-04.A3L

| | |
|-------------------|--------------------------------------|
| FCC ID: | A3LSMN960U |
| APPLICANT: | Samsung Electronics Co., Ltd. |

Application Type: Certification

Model: SM-N960U

Additional Model(s): SM-N960U1, SM-N960W, SM-N960XU

EUT Type: Portable Handset


FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part: §2.1049, §22(H), §90(R), §90(S)

Test Procedure(s): ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Randy Ortanez
President




| | | | | |
|--|---|---|---|--|
| FCC ID: A3LSMN960U |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | Page 1 of 63 | |

TABLE OF CONTENTS


| | | |
|-----|---|----|
| 1.0 | INTRODUCTION | 4 |
| 1.1 | Scope | 4 |
| 1.2 | PCTEST Test Location | 4 |
| 1.3 | Test Facility / Accreditations | 4 |
| 2.0 | PRODUCT INFORMATION | 5 |
| 2.1 | Equipment Description | 5 |
| 2.2 | Device Capabilities | 5 |
| 2.3 | Test Configuration | 5 |
| 2.4 | EMI Suppression Device(s)/Modifications | 5 |
| 3.0 | DESCRIPTION OF TESTS | 6 |
| 3.1 | Evaluation Procedure | 6 |
| 3.2 | Radiated Power and Radiated Spurious Emissions | 6 |
| 4.0 | MEASUREMENT UNCERTAINTY | 7 |
| 5.0 | TEST EQUIPMENT CALIBRATION DATA | 8 |
| 6.0 | SAMPLE CALCULATIONS | 9 |
| 7.0 | TEST RESULTS | 10 |
| 7.1 | Summary | 10 |
| 7.2 | Occupied Bandwidth | 11 |
| 7.3 | Spurious and Harmonic Emissions at Antenna Terminal | 24 |
| 7.4 | Band Edge Emissions at Antenna Terminal | 32 |
| 7.5 | Conducted Power Output Data | 43 |
| 7.6 | Radiated Power (ERP) | 45 |
| 7.7 | Radiated Spurious Emissions Measurements | 48 |
| 7.8 | Frequency Stability / Temperature Variation | 56 |
| 8.0 | CONCLUSION | 63 |

| | | | | |
|--|---|---|---|--|
| FCC ID: A3LSMN960U |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | Page 2 of 63 | |



MEASUREMENT REPORT

FCC Part 22(H) & 90



| Mode | Tx Frequency (MHz) | Measurement | Max. Power (W) | Max. Power (dBm) | Emission Designator | Modulation |
|----------------|--------------------|-------------|----------------|------------------|---------------------|------------|
| CDMA800 (BC10) | 817.9 - 823.1 | Conducted | 0.327 | 25.14 | 1M27F9W | CDMA |
| LTE Band 14 | 790.5 - 795.5 | ERP | 0.106 | 20.25 | 4M55G7D | QPSK |
| LTE Band 14 | 790.5 - 795.5 | ERP | 0.087 | 19.41 | 4M52W7D | 16-QAM |
| LTE Band 14 | 790.5 - 795.5 | ERP | 0.069 | 18.38 | 4M52W7D | 64-QAM |
| LTE Band 14 | 793 | ERP | 0.102 | 20.08 | 9M00G7D | QPSK |
| LTE Band 14 | 793 | ERP | 0.086 | 19.36 | 9M02W7D | 16-QAM |
| LTE Band 14 | 793 | ERP | 0.068 | 18.33 | 8M99W7D | 64-QAM |
| LTE Band 26 | 814.7 - 823.3 | Conducted | 0.292 | 24.66 | 1M08G7D | QPSK |
| LTE Band 26 | 814.7 - 823.3 | Conducted | 0.252 | 24.01 | 1M08W7D | 16-QAM |
| LTE Band 26 | 814.7 - 823.3 | Conducted | 0.196 | 22.93 | 1M08W7D | 64-QAM |
| LTE Band 26 | 815.5 - 822.5 | Conducted | 0.301 | 24.79 | 2M70G7D | QPSK |
| LTE Band 26 | 815.5 - 822.5 | Conducted | 0.256 | 24.08 | 2M68W7D | 16-QAM |
| LTE Band 26 | 815.5 - 822.5 | Conducted | 0.202 | 23.05 | 2M69W7D | 64-QAM |
| LTE Band 26 | 816.5 - 821.5 | Conducted | 0.296 | 24.71 | 4M52G7D | QPSK |
| LTE Band 26 | 816.5 - 821.5 | Conducted | 0.252 | 24.02 | 4M50W7D | 16-QAM |
| LTE Band 26 | 816.5 - 821.5 | Conducted | 0.197 | 22.94 | 4M52W7D | 64-QAM |
| LTE Band 26 | 819 | Conducted | 0.294 | 24.69 | 8M99G7D | QPSK |
| LTE Band 26 | 819 | Conducted | 0.252 | 24.01 | 8M96W7D | 16-QAM |
| LTE Band 26 | 819 | Conducted | 0.197 | 22.95 | 8M96W7D | 64-QAM |
| LTE Band 26 | 821.5 | Conducted | 0.281 | 24.49 | 13M4G7D | QPSK |
| LTE Band 26 | 821.5 | Conducted | 0.244 | 23.87 | 13M5W7D | 16-QAM |
| LTE Band 26 | 821.5 | Conducted | 0.194 | 22.87 | 13M4W7D | 64-QAM |
| LTE Band 26 | 821.5 | ERP | 0.114 | 20.59 | 13M4G7D | QPSK |
| LTE Band 26 | 821.5 | ERP | 0.079 | 18.98 | 13M5W7D | 16-QAM |
| LTE Band 26 | 821.5 | ERP | 0.065 | 18.15 | 13M4W7D | 64-QAM |

EUT Overview

| | | | |
|---|---|-------------------------------|---------------------------------|
| FCC ID: A3LSMN960U |  MEASUREMENT REPORT (CERTIFICATION)  | | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | Page 3 of 63 |

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

| | | | | |
|--|---|---|---|--|
| FCC ID: A3LSMN960U |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | Page 4 of 63 | |

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMN960U**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 22(H) and 90.691.

Test Device Serial No.: 55608, 55921

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 CDMA/EvDO Rev0/A, 1x Advanced (BC0, BC1, BC10), 850/1900 GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC, ANT+

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2010 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT placed on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

This device uses a stylus pen for several functions. The EUT can operate with the stylus pen inserted or removed and the emissions measurements for the EUT were performed with and without the stylus pen inserted into the EUT. There was no degradation found without the stylus pen removed so all emission measurements were performed with the pen inserted into the EUT.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

| | | | |
|---|---|-------------------------------|---------------------------------|
| FCC ID: A3LSMN960U |  MEASUREMENT REPORT (CERTIFICATION)  | | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | Page 5 of 63 |

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2010) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

3.2 Radiated Power and Radiated Spurious Emissions §2.1053, §90.635, §90.691

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer “Channel Power” function with the integration band set to the emissions’ occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 D01 v03r01.

Per the guidance of ANSI/TIA-603-E-2010, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power [Watts]})$ specified in 90.691.

For fundamental radiated power measurements, the guidance of KDB 971168 D01 v03r01 is used to record the EUT power level that is subsequently matched via the aforementioned substitution method given in ANSI/TIA-603-E-2010.

| | | | | |
|---|---|---------------------------------------|---|---------------------------------|
| FCC ID: A3LSMN960U |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | Page 6 of 63 | |

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Contribution | Expanded Uncertainty (\pm dB) |
|----------------------------------|----------------------------------|
| Conducted Bench Top Measurements | 1.13 |
| Radiated Disturbance (<1GHz) | 4.98 |
| Radiated Disturbance (>1GHz) | 5.07 |
| Radiated Disturbance (>18GHz) | 5.09 |

| | | | | |
|--|---|---|---|--|
| FCC ID: A3LSMN960U |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | Page 7 of 63 | |

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

| Manufacturer | Model | Description | Cal Date | Cal Interval | Cal Due | Serial Number |
|-----------------|---------------|--------------------------------------|------------|--------------|------------|---------------|
| - | LTX2 | Licensed Transmitter Cable Set | 8/10/2017 | Annual | 8/10/2018 | LTX2 |
| Agilent | N9020A | MXA Signal Analyzer | 1/24/2018 | Annual | 1/24/2019 | US46470561 |
| Agilent | N9030A | PXA Signal Analyzer (26.5GHz) | 8/28/2017 | Annual | 8/28/2018 | MY49432391 |
| COM-Power | AL-130R | Active Loop Antenna | 6/5/2017 | Annual | 6/5/2018 | 121085 |
| Emco | 3115 | Horn Antenna (1-18GHz) | 3/28/2018 | Biennial | 3/28/2020 | 9704-5182 |
| Espec | ESX-2CA | Environmental Chamber | 3/28/2018 | Annual | 3/28/2019 | 17620 |
| ETS Lindgren | 3117 | 1-18 GHz DRG Horn (Medium) | 12/1/2016 | Biennial | 12/1/2018 | 125518 |
| ETS Lindgren | 3164-08 | Quad Ridge Horn Antenna | 3/28/2018 | Biennial | 3/28/2020 | 128337 |
| Huber+Suhner | Sucoflex 102A | 40GHz Radiated Cable Set | 1/23/2018 | Annual | 1/23/2019 | 251425001 |
| Mini Circuits | PWR-SEN-4GHS | USB Power Sensor | 3/30/2018 | Annual | 3/30/2019 | 11401010036 |
| Mini Circuits | TVA-11-422 | RF Power Amp | N/A | | N/A | QA1317001 |
| Mini-Circuits | SSG-4000HP | Synthesized Signal Generator | N/A | | N/A | 11208010032 |
| Rohde & Schwarz | CMW500 | Radio Communication Tester | 10/13/2017 | Annual | 10/13/2018 | 102060 |
| Rohde & Schwarz | ESU26 | EMI Test Receiver (26.5GHz) | 5/19/2017 | Annual | 6/19/2018 | 100342 |
| Rohde & Schwarz | ESU40 | EMI Test Receiver (40GHz) | 7/31/2017 | Annual | 7/31/2018 | 100348 |
| Rohde & Schwarz | SFUNIT-Rx | Shielded Filter Unit | 7/3/2017 | Annual | 7/3/2018 | 102135 |
| Rohde & Schwarz | SFUNIT-Rx | Shielded Filter Unit | 7/3/2017 | Annual | 7/3/2018 | 102134 |
| Rohde & Schwarz | SFUNIT-Rx | Shielded Filter Unit | 7/3/2017 | Annual | 7/3/2018 | 102133 |
| Anritsu | MT8820C | Radio Communication Analyzer | 10/25/2017 | Annual | 10/25/2018 | 6201144419 |
| Rohde & Schwarz | TC-TA18 | Cross-Pol Antenna 400MHz-18GHz | 10/30/2017 | Annual | 10/30/2018 | 101058 |
| Schwarzbeck | UHA 9105 | Dipole Antenna | 8/26/2016 | Biennial | 8/26/2018 | 2696 |
| Rohde & Schwarz | TS-PR8 | Preamplifier-Antenna SYS; 30MHz-8GHz | 10/19/2017 | Annual | 10/19/2018 | 102324 |
| Sunol | DRH-118 | Horn Antenna (1-18GHz) | 8/11/2017 | Biennial | 8/11/2019 | A050307 |
| Sunol Sciences | JB6 | JB6 Antenna | 9/27/2016 | Biennial | 9/27/2018 | A082816 |

Table 5-1. Test Equipment

Notes:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

| | | | | | |
|---|---|---|--|---|---------------------------------|
| FCC ID: A3LSMN960U |  | MEASUREMENT REPORT (CERTIFICATION) | |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 8 of 63 | |

6.0 SAMPLE CALCULATIONS

Emission Designator

Emission Designator = 1M25F9W

CDMA BW = 1.25 MHz
 F = Frequency Modulation
 9 = Composite Digital Info
 W = Combination (Audio/Data) (Measured at the 99.75% power bandwidth)

Spurious Radiated Emission – BC10

Example: Channel 476 CDMA BC10 Mode 3rd Harmonic (2453.70MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 2453.70 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80) = 50.3 dBc.

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz
 G = Phase Modulation
 7 = Quantized/Digital Info
 D = Data transmission, telemetry, telecommand

16QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz
 W = Amplitude/Angle Modulated
 7 = Quantized/Digital Info
 D = Data transmission, telemetry, telecommand

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80).

| | | | | |
|---|---|---------------------------------------|---|---------------------------------|
| FCC ID: A3LSMN960U |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | Page 9 of 63 | |

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMN960U
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): CDMA / EvDO / LTE
 Band: CDMA/EvDO Band Class 10 / LTE Band14 / LTE Band 26

| FCC Part Section(s) | Test Description | Test Limit | Test Condition | Test Result | Reference |
|----------------------------|--|--|----------------|-------------|-------------------|
| 2.1049 | Occupied Bandwidth | N/A | CONDUCTED | PASS | Section 7.2 |
| 2.1051 90.543 90.691 | Conducted Band Edge / Spurious Emissions | > 43 + log ₁₀ (P[Watts]) for all out-of-band emissions except > 50 + 10log ₁₀ (P[Watts]) at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge | | PASS | Sections 7.3, 7.4 |
| 2.1055 90.213 | Frequency Stability | < 2.5 ppm | | PASS | Section 7.8 |
| 2.1046 90.635 | Conducted Power | < 100 Watts (LTE B26) | | PASS | Section 7.5 |
| 90.542 | Effective Radiated Power (Band 14) | < 3 Watts max. ERP | RADIATED | PASS | Section 7.6 |
| 22.913(a.2) | Effective Radiated Power (Band 26) | < 7 Watts max. ERP | | PASS | Section 7.6 |
| 2.1053 90.543 90.691 | Radiated Spurious Emissions (CDMA/EvDO BC10, LTE B14, LTE B26) | > 43 + log ₁₀ (P[Watts]) for all out-of-band emissions except > 50 + 10log ₁₀ (P[Watts]) at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge | | PASS | Section 7.7 |

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 7.0 were taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "2G/3G Automation," Version 3.11.

| | | | | | |
|---|---|---|--|---|---------------------------------|
| FCC ID: A3LSMN960U |  | MEASUREMENT REPORT (CERTIFICATION) | |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 10 of 63 | |

7.2 Occupied Bandwidth

§2.1049

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

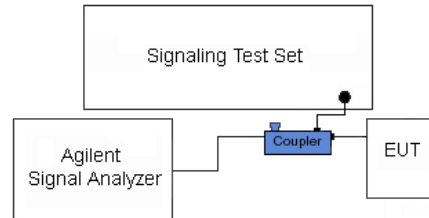



Figure 7-1. Test Instrument & Measurement Setup

Test Notes


None.

| | | | | |
|---|---|---------------------------------------|---|---------------------------------|
| FCC ID: A3LSMN960U |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | Page 11 of 63 | |

CDMA BC10

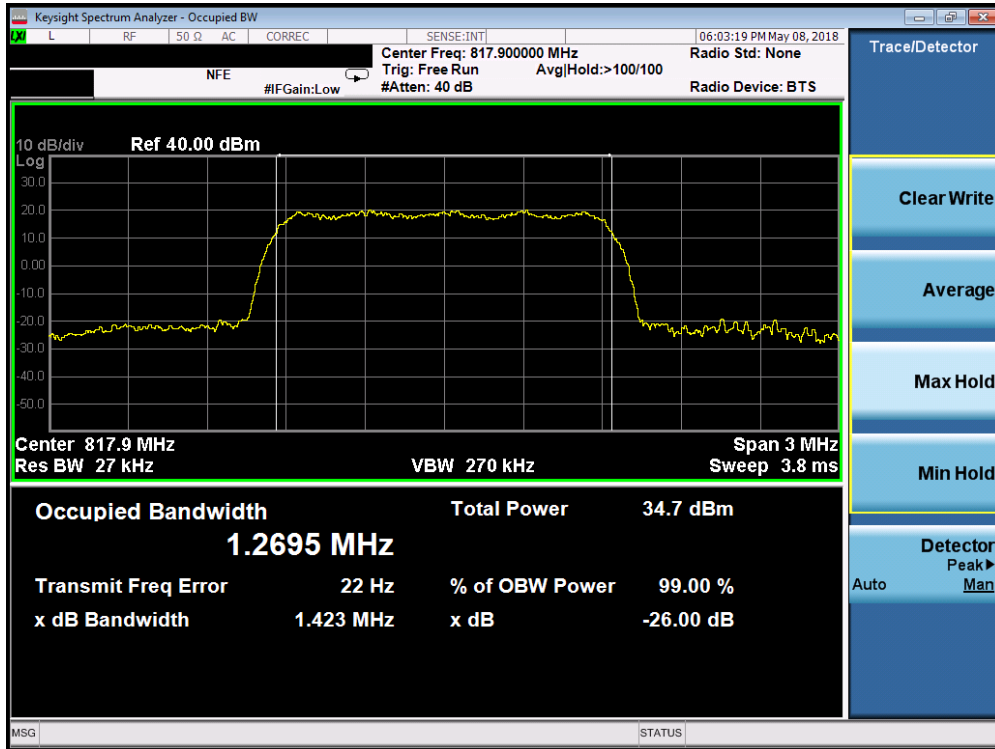


Plot 7-1. Occupied Bandwidth Plot (CDMA – Ch. 476)

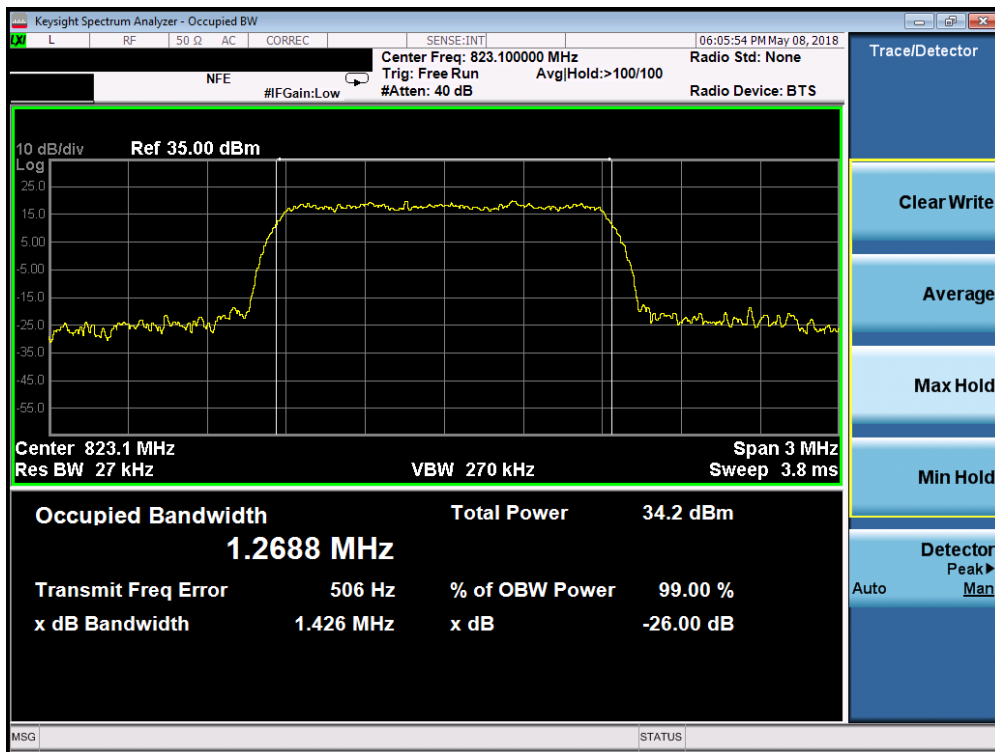


Plot 7-2. Occupied Bandwidth Plot (CDMA – Ch. 684)

| | | | | |
|---|---------------------------------|---------------------------------------|--|---------------------------------|
| FCC ID: A3LSMN960U | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 12 of 63 |

LTE Band 14

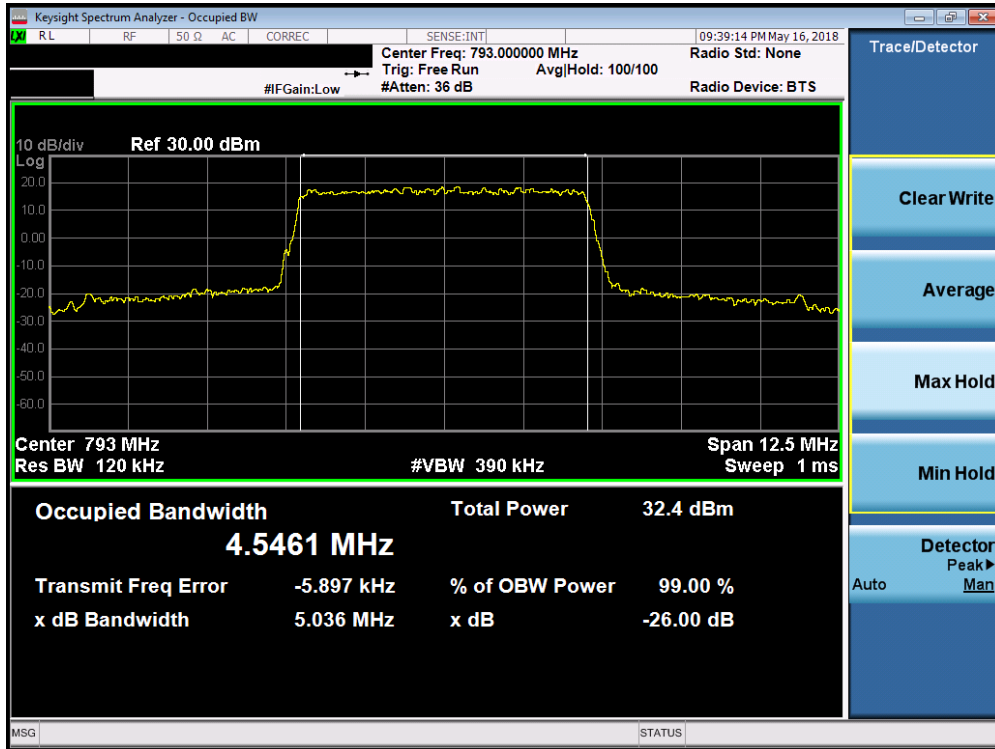


Plot 7-3. Occupied Bandwidth Plot (LTE Band 14 – 5MHz QPSK – Full RB Configuration)

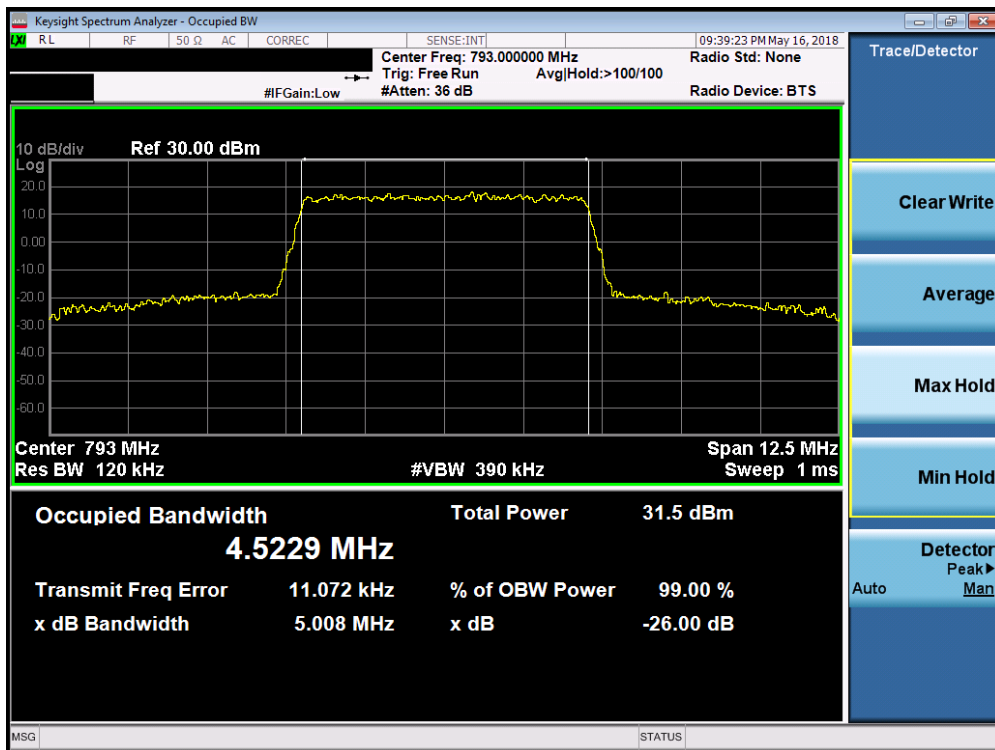


Plot 7-4. Occupied Bandwidth Plot (LTE Band 14 – 5MHz 16QAM – Full RB Configuration)

| | | | | |
|---|---------------------------------|---------------------------------------|--|---------------------------------|
| FCC ID: A3LSMN960U | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 13 of 63 |

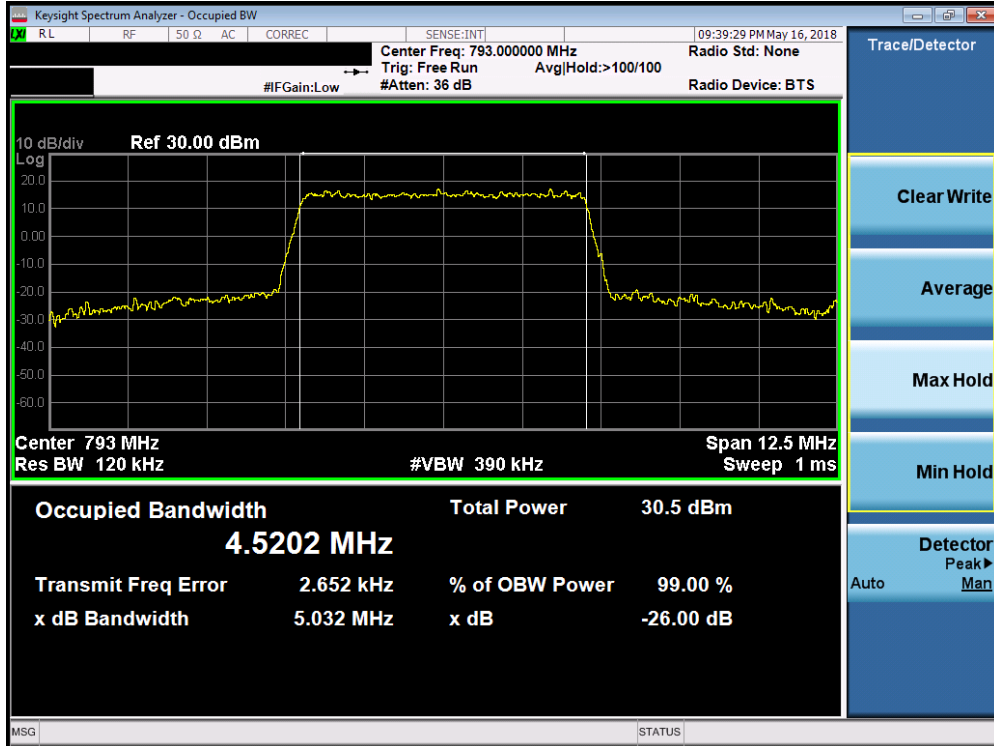


Plot 7-5. Occupied Bandwidth Plot (LTE Band 14 – 5MHz 64QAM – Full RB Configuration)

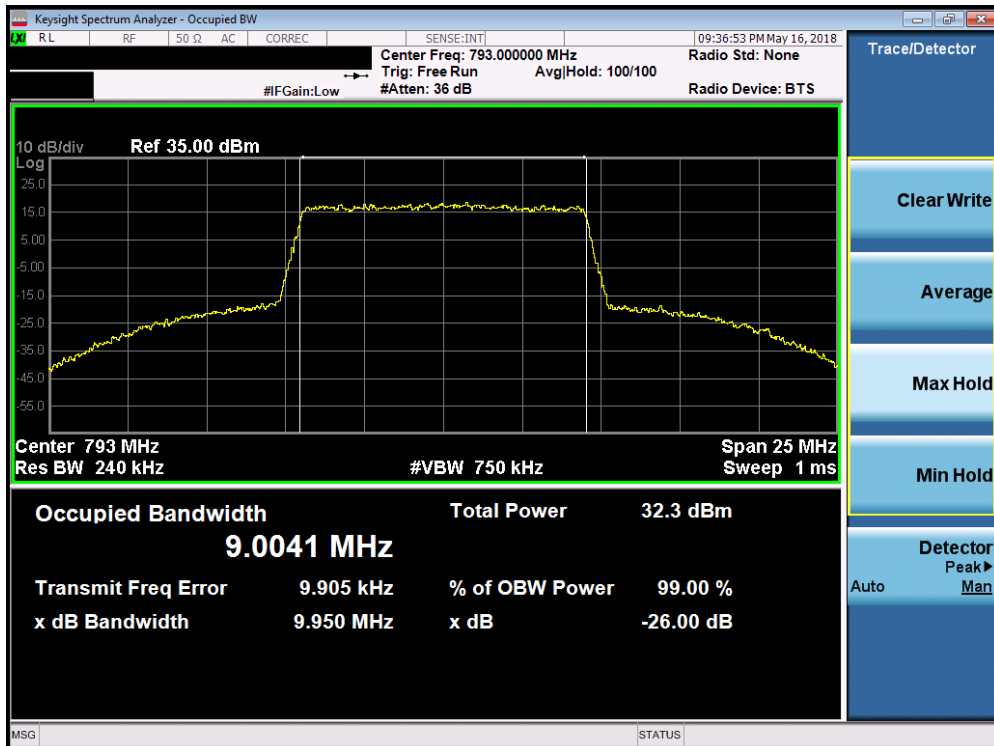


Plot 7-6. Occupied Bandwidth Plot (LTE Band 14 – 10MHz QPSK – Full RB Configuration)

| | | | | |
|---|---------------------------------|---------------------------------------|--|---------------------------------|
| FCC ID: A3LSMN960U | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 14 of 63 |

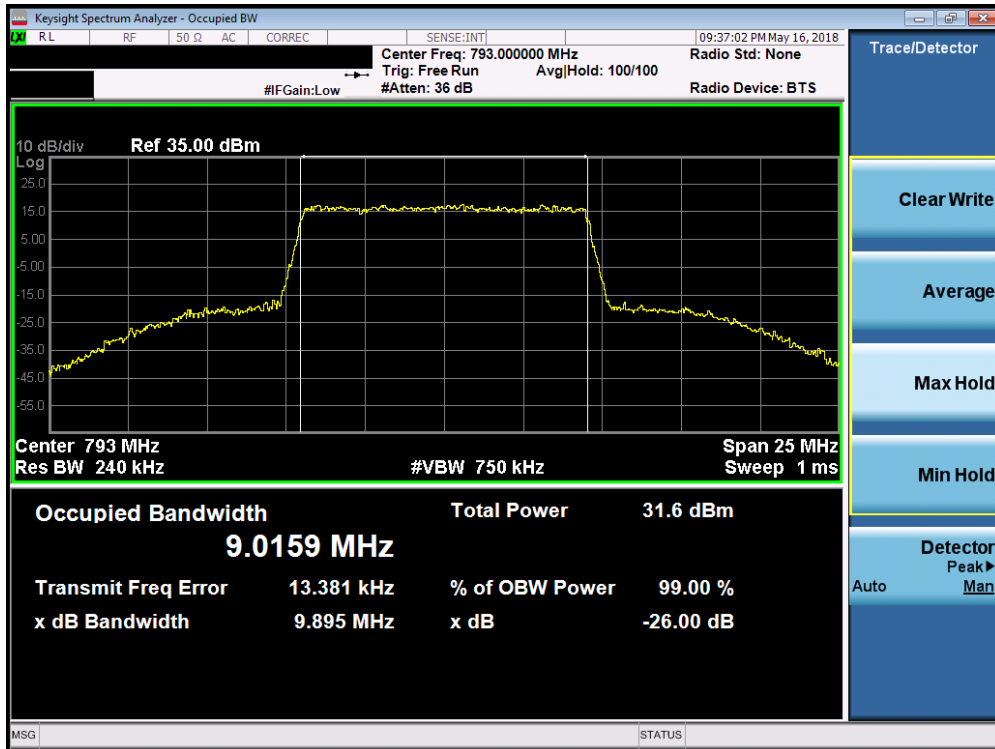


Plot 7-7. Occupied Bandwidth Plot (LTE Band 14 – 10MHz 16QAM – Full RB Configuration)

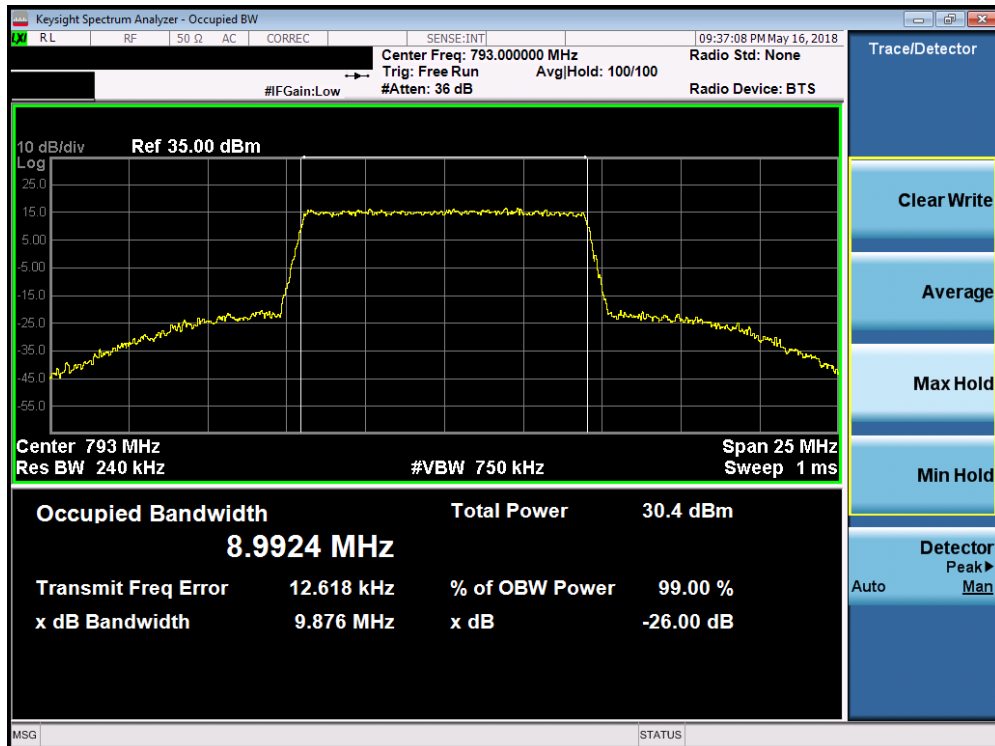


Plot 7-8. Occupied Bandwidth Plot (LTE Band 14 – 10MHz 64QAM – Full RB Configuration)

| | | | | |
|---|---------------------------------|---------------------------------------|--|---------------------------------|
| FCC ID: A3LSMN960U | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 15 of 63 |

LTE Band 26

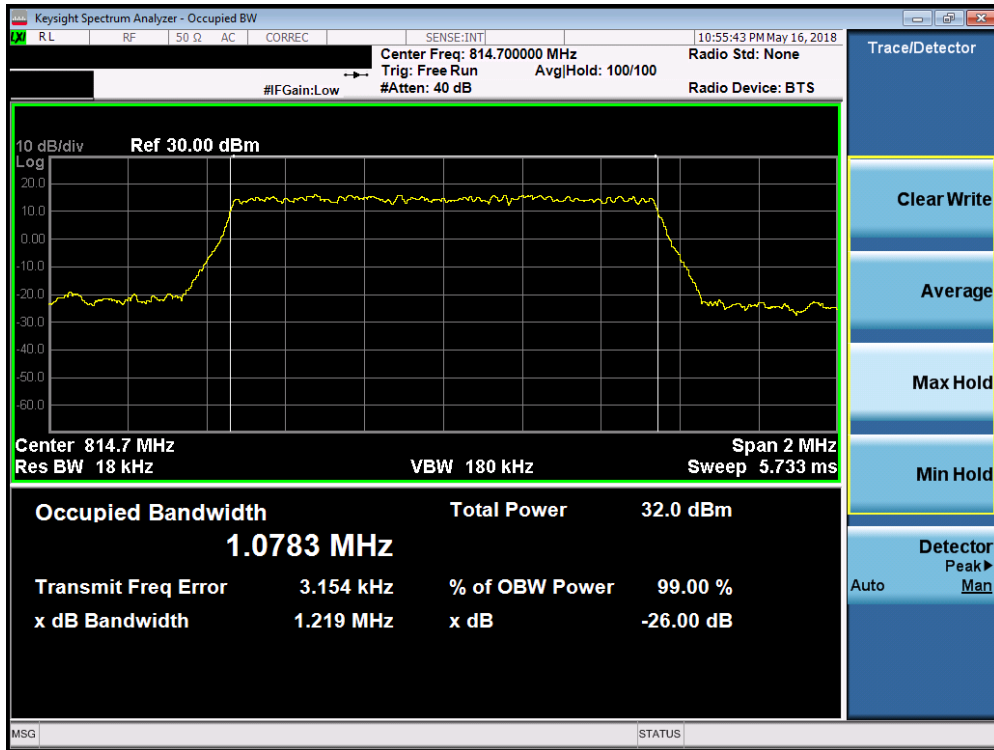


Plot 7-9. Occupied Bandwidth Plot (LTE B26 – 1.4MHz QPSK – RB Size 6– Low Channel)

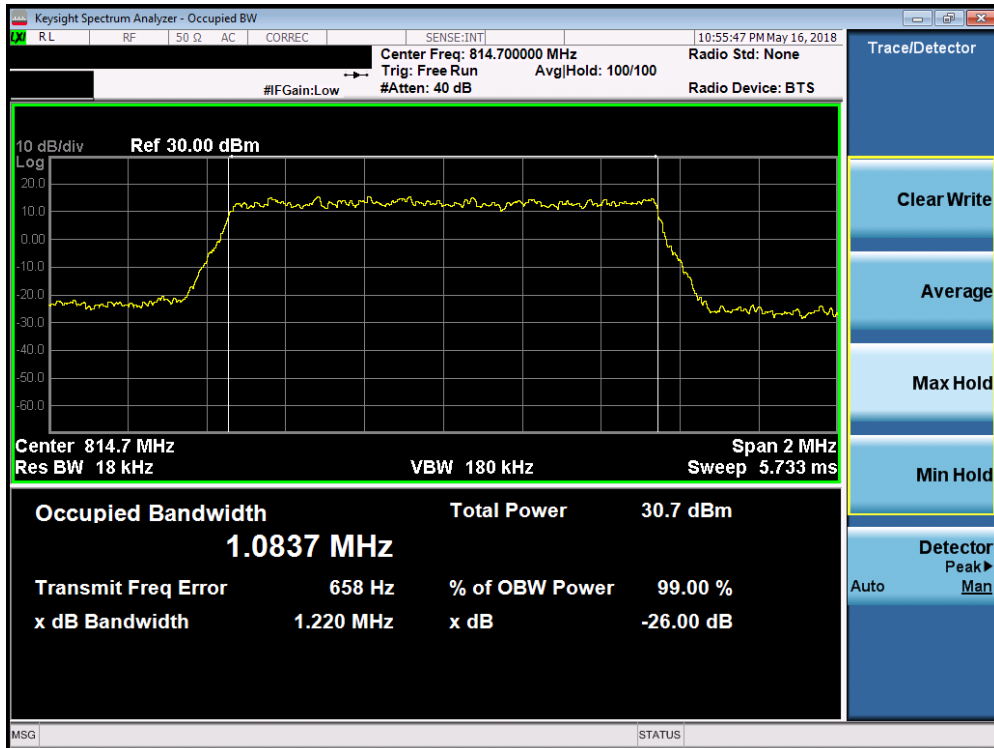


Plot 7-10. Occupied Bandwidth Plot (LTE B26 – 1.4MHz 16-QAM – RB Size 6– Low Channel)

| | | | | |
|---|---------------------------------|---------------------------------------|--|---------------------------------|
| FCC ID: A3LSMN960U | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 16 of 63 |

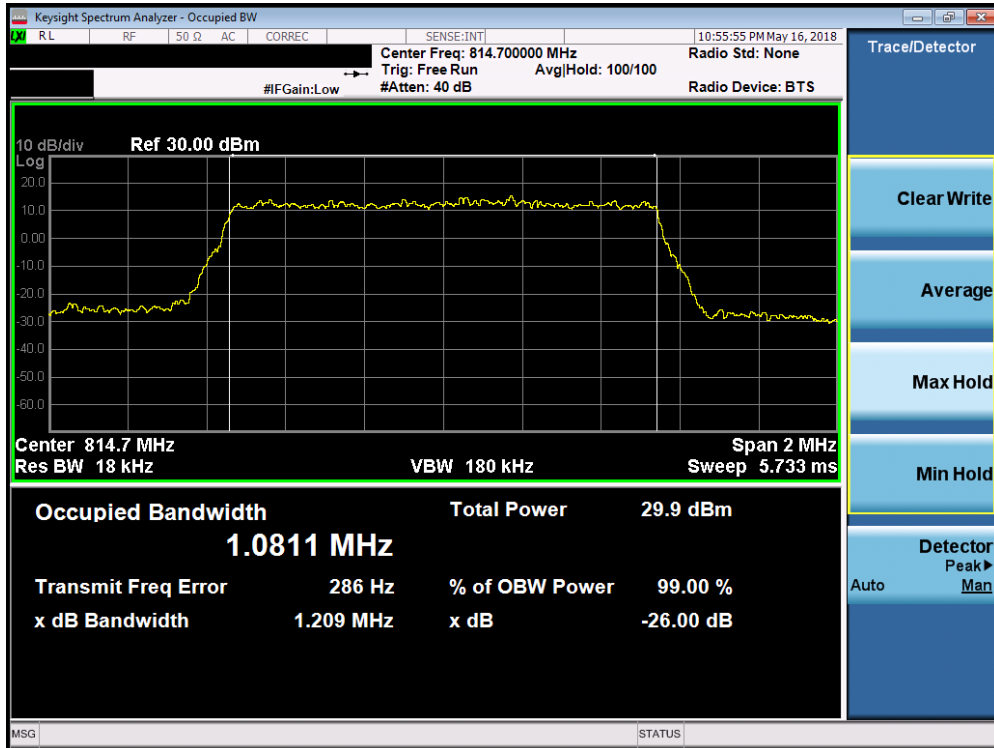


Plot 7-11. Occupied Bandwidth Plot (LTE B26 – 1.4MHz 64-QAM – RB Size 6– Low Channel)

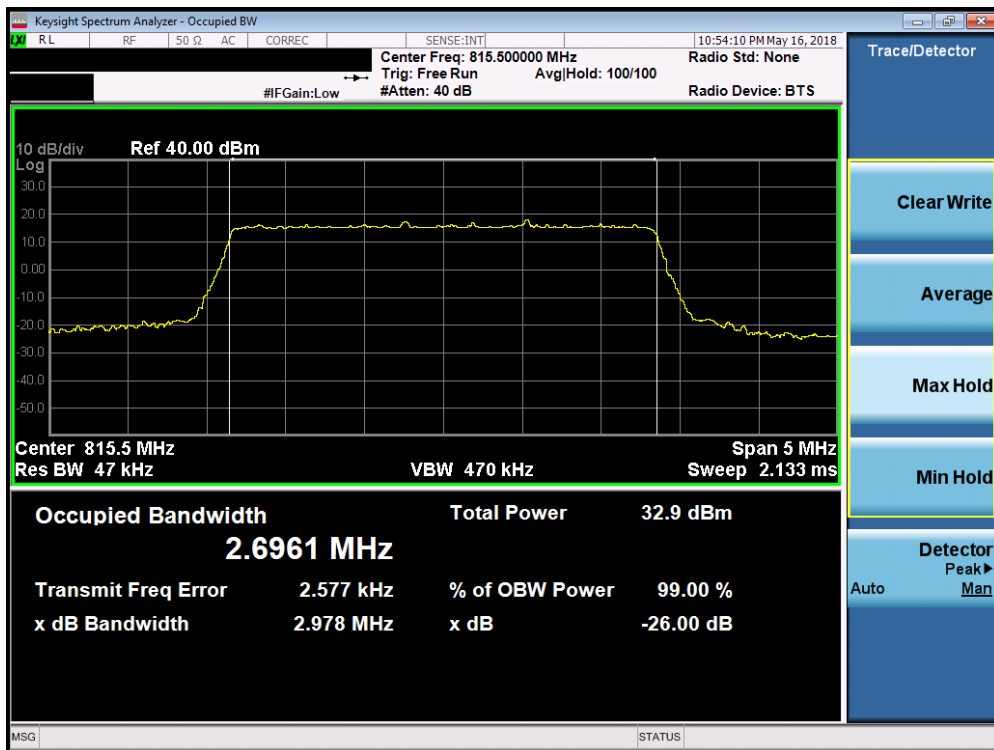


Plot 7-12. Occupied Bandwidth Plot (LTE B26 – 3MHz QPSK – RB Size 15– Low Channel)

| | | | | |
|---|---------------------------------|---------------------------------------|--|---------------------------------|
| FCC ID: A3LSMN960U | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 17 of 63 |

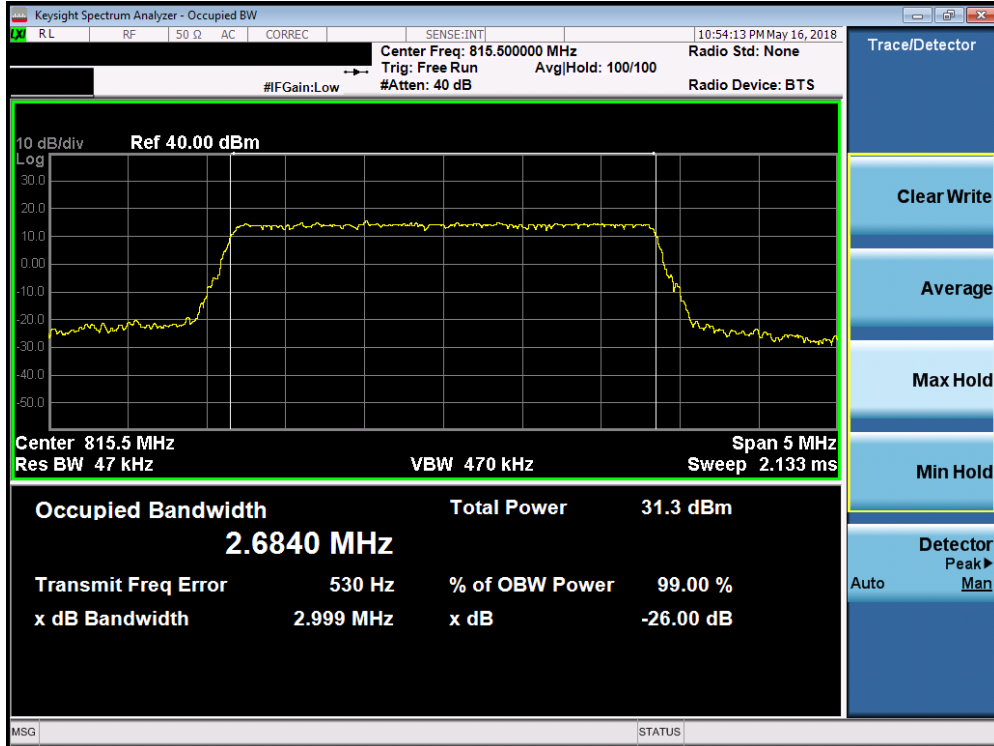


Plot 7-13. Occupied Bandwidth Plot (LTE B26 – 3MHz 16-QAM – RB Size 15– Low Channel)

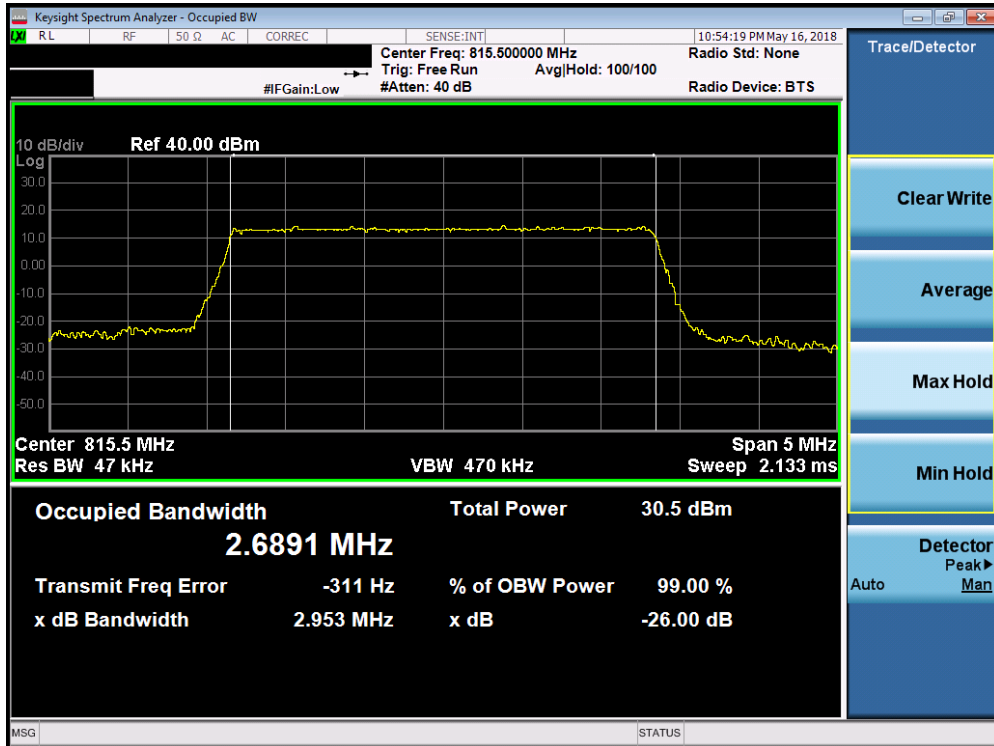


Plot 7-14. Occupied Bandwidth Plot (LTE B26 – 3MHz 64-QAM – RB Size 15– Low Channel)

| | | | | |
|---|---------------------------------|---------------------------------------|--|---------------------------------|
| FCC ID: A3LSMN960U | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 18 of 63 |

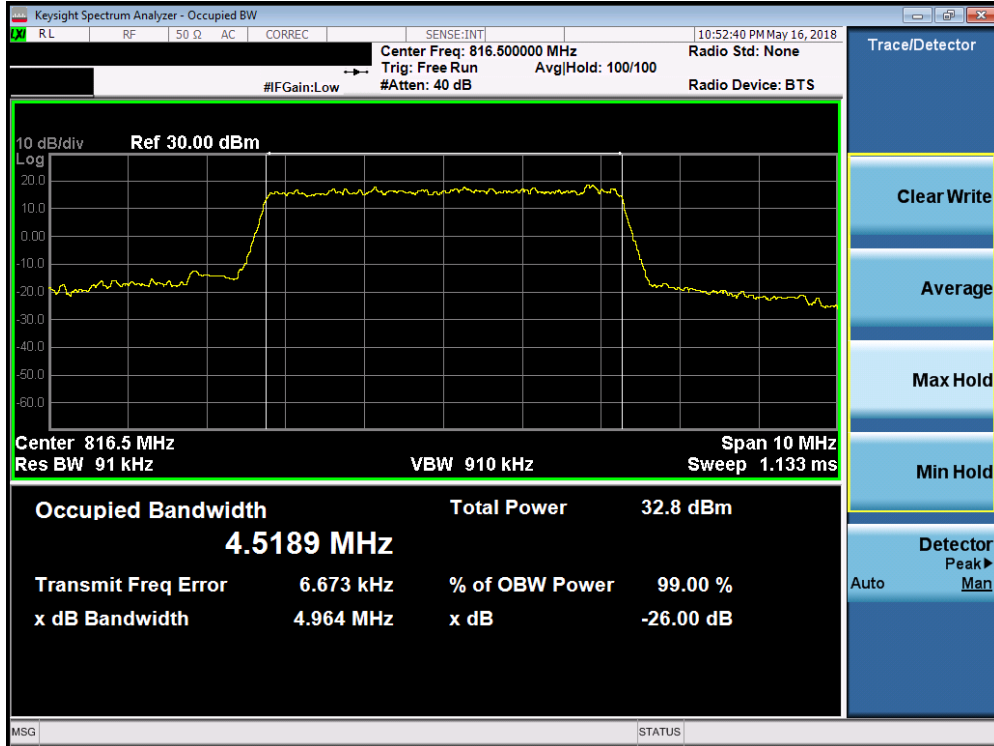


Plot 7-15. Occupied Bandwidth Plot (LTE B26 – 5MHz QPSK – RB Size 25– Low Channel)

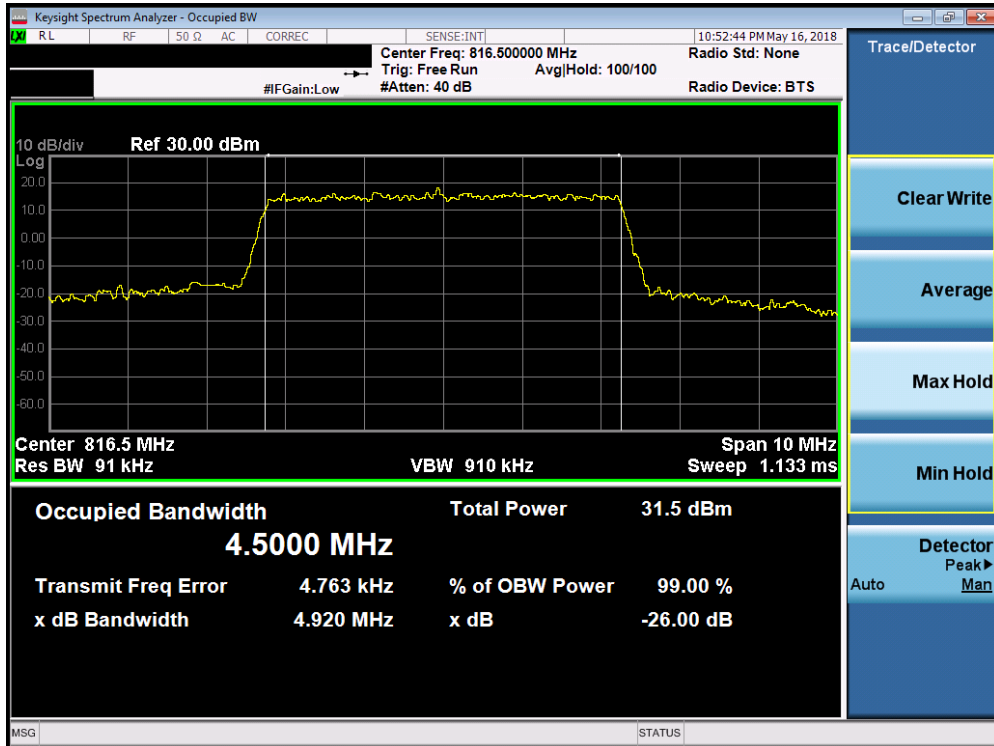


Plot 7-16. Occupied Bandwidth Plot (LTE B26 – 5MHz 16-QAM – RB Size 25– Low Channel)

| | | | | |
|---|---------------------------------|---------------------------------------|--|---------------------------------|
| FCC ID: A3LSMN960U | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 19 of 63 |

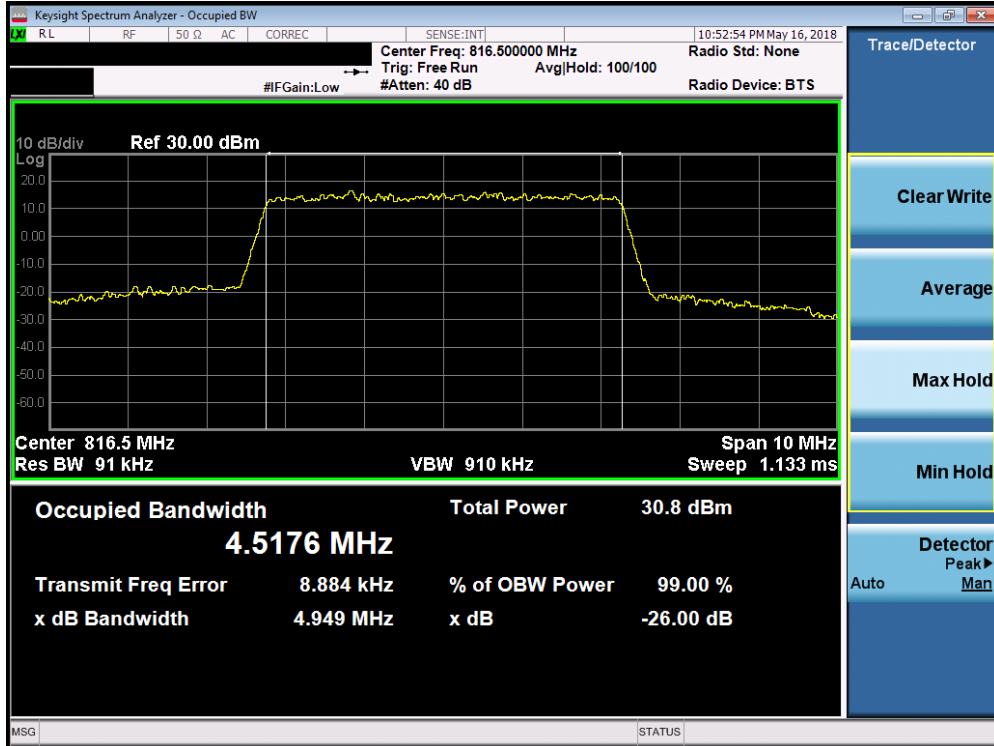


Plot 7-17. Occupied Bandwidth Plot (LTE B26 – 5MHz 64-QAM – RB Size 25– Low Channel)

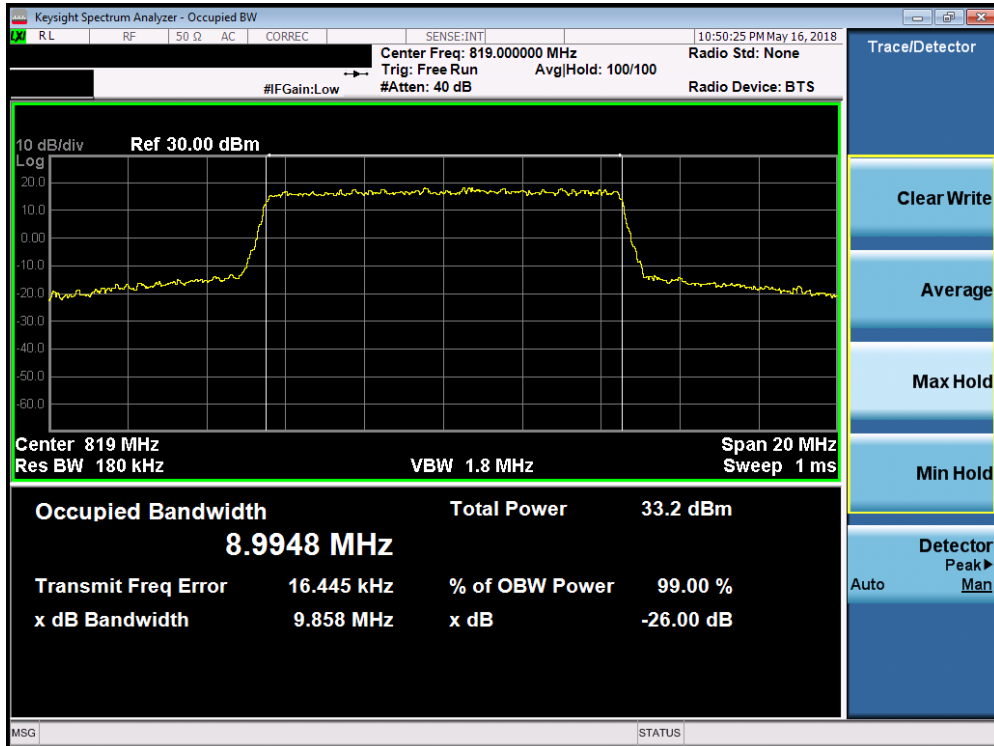


Plot 7-18. Occupied Bandwidth Plot (LTE B26 – 10MHz QPSK – RB Size 50)

| | | | | |
|---|---------------------------------|---------------------------------------|--|---------------------------------|
| FCC ID: A3LSMN960U | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 20 of 63 |

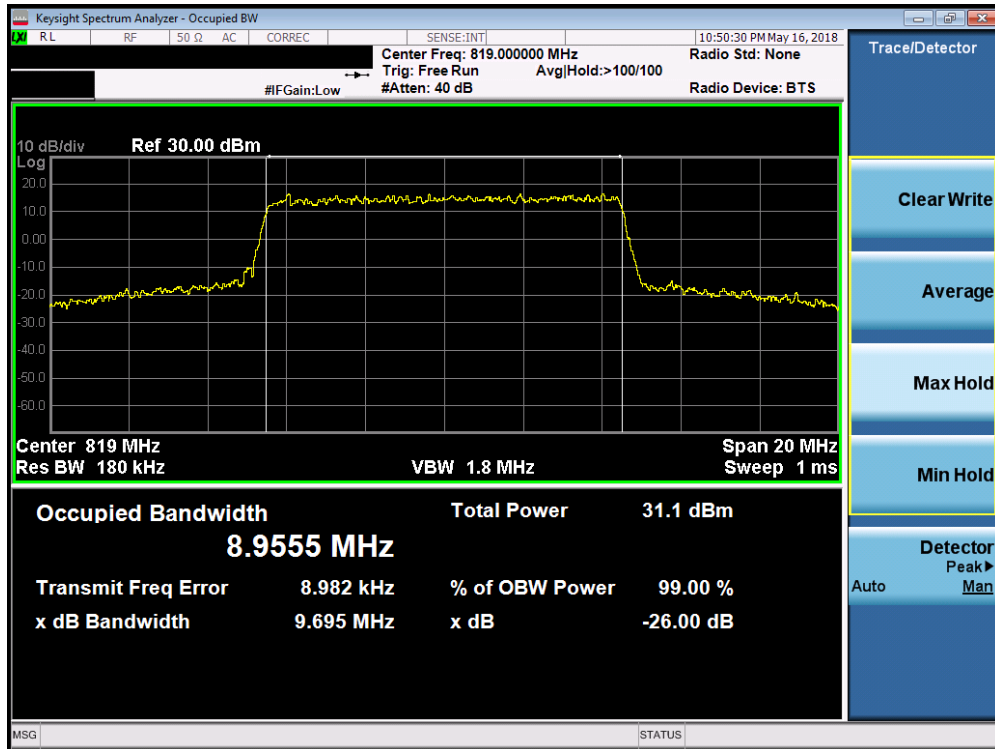


Plot 7-19. Occupied Bandwidth Plot (LTE B26 – 10MHz 16-QAM – RB Size 50)

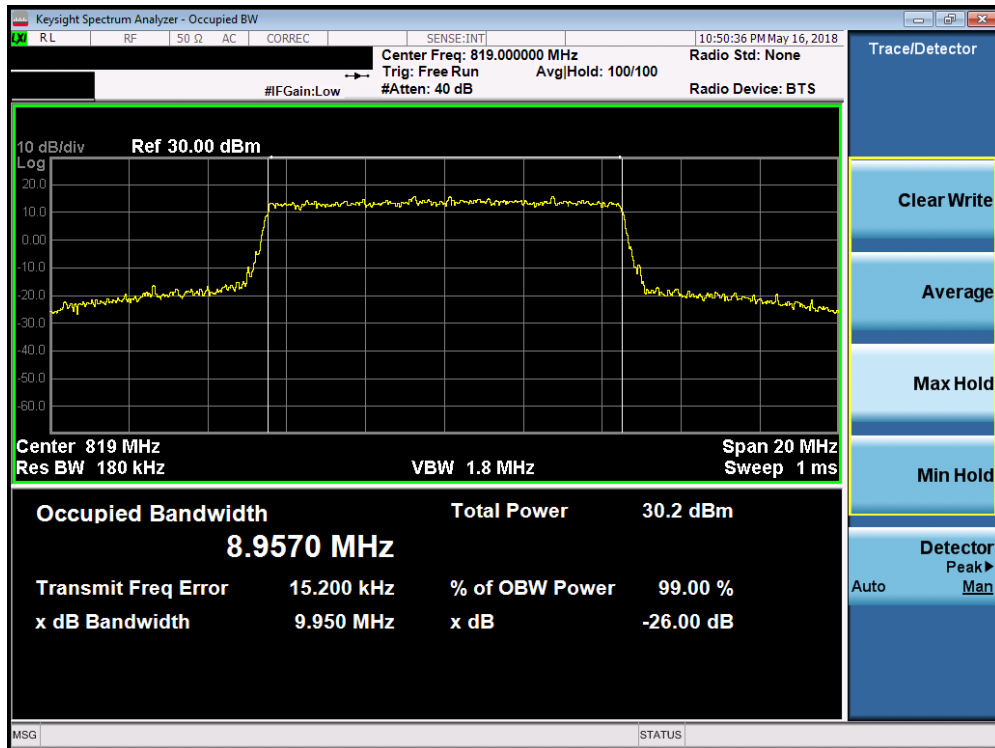


Plot 7-20. Occupied Bandwidth Plot (LTE B26 – 10MHz 64-QAM – RB Size 50)

| | | | | |
|---|---------------------------------|---------------------------------------|--|---------------------------------|
| FCC ID: A3LSMN960U | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 21 of 63 |

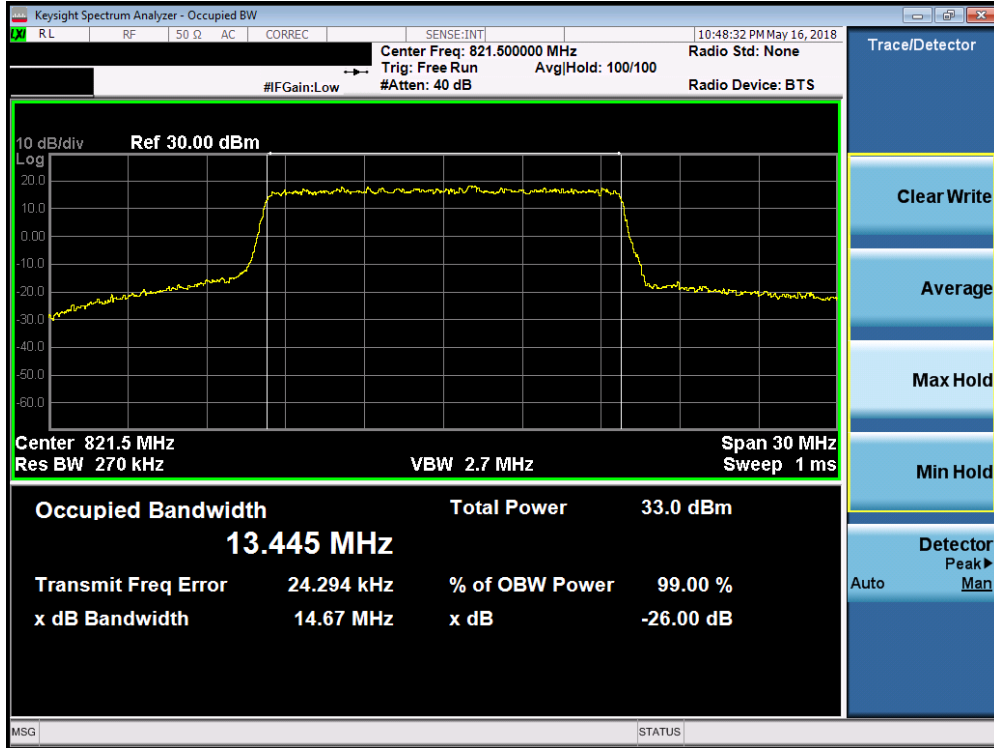


Plot 7-21. Occupied Bandwidth Plot (LTE B26 – 15MHz QPSK – RB Size 75)

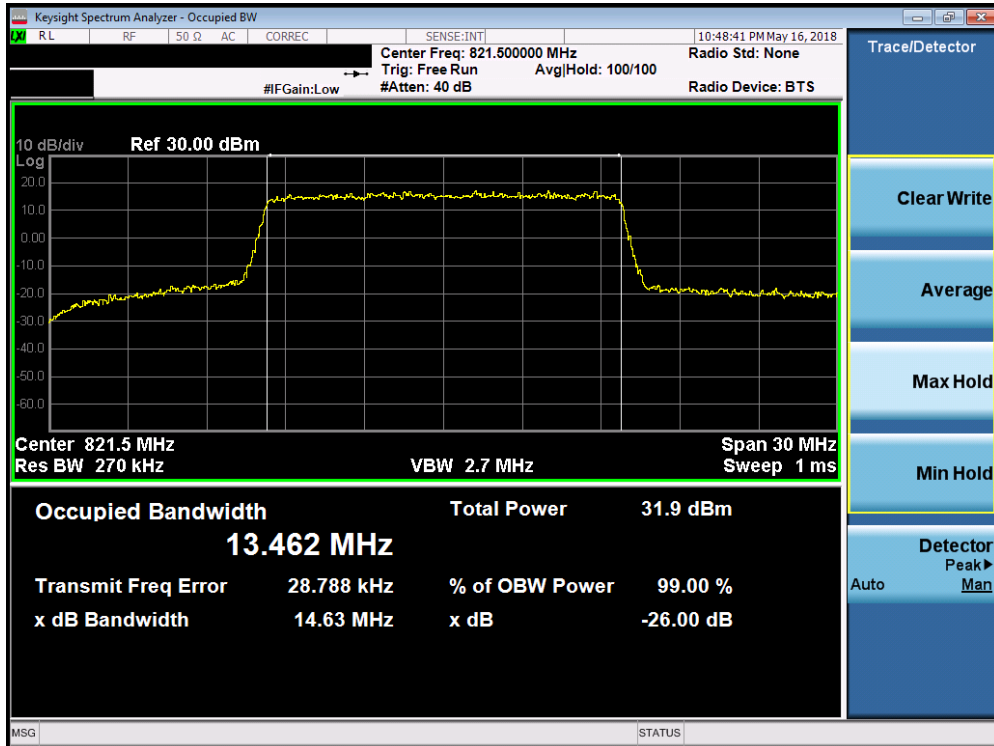

Plot 7-22. Occupied Bandwidth Plot (LTE B26 – 15MHz 16-QAM – RB Size 75)

| | | | | |
|---|---------------------------------|---------------------------------------|--|---------------------------------|
| FCC ID: A3LSMN960U | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 22 of 63 |

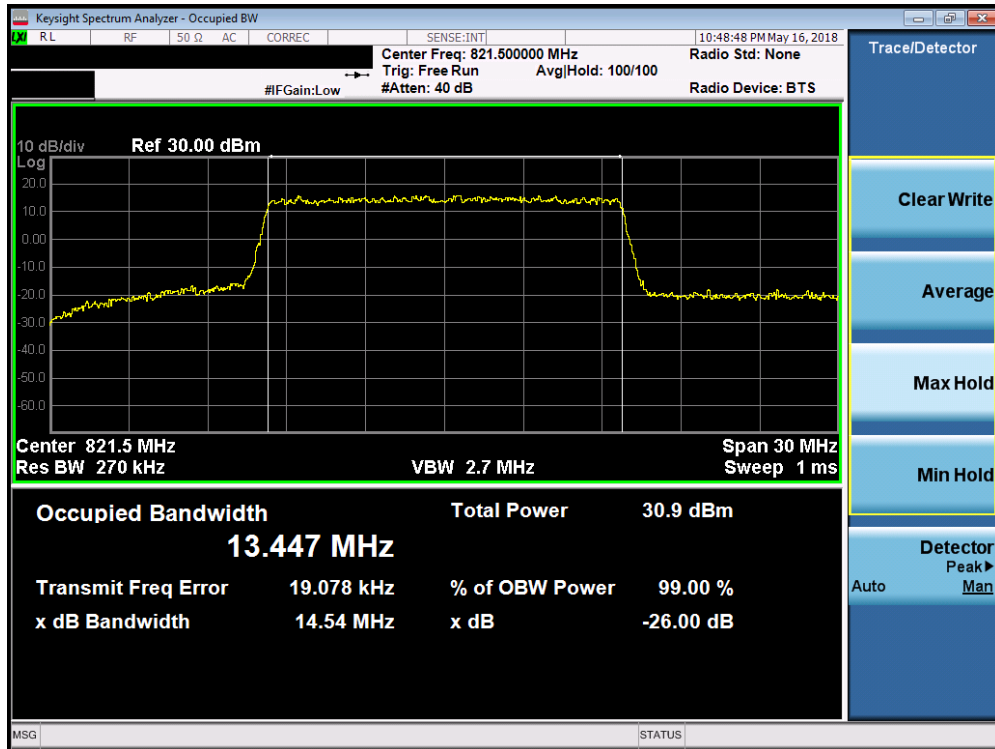

Plot 7-23. Occupied Bandwidth Plot (LTE B26 – 15MHz 64-QAM – RB Size 75)

| | | | | |
|---|---|-------------------------------|---------------|---------------------------------|
| FCC ID: A3LSMN960U | MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | Page 23 of 63 | |

7.3 Spurious and Harmonic Emissions at Antenna Terminal \$2.1051 \$90.543 \$90.691

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. RBW \geq 1MHz
3. VBW \geq 3 x RBW
4. Detector = RMS
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


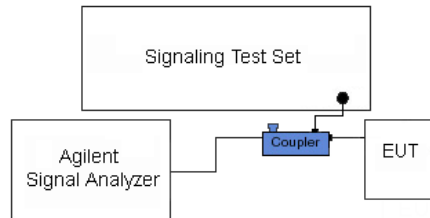


Figure 7-2. Test Instrument & Measurement Setup


Test Notes

Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for Part 22. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

| | | | | |
|---|---|---------------------------------------|---|---------------------------------|
| FCC ID: A3LSMN960U |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | Page 24 of 63 | |

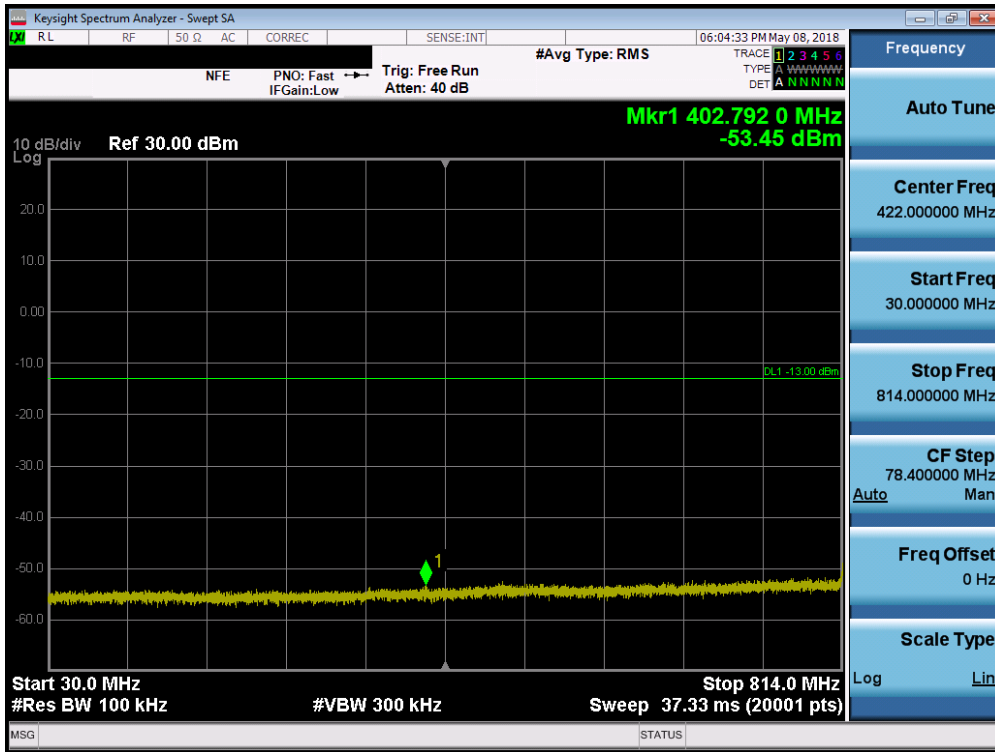


Plot 7-24. Conducted Spurious Plot (CDMA – Ch. 476)

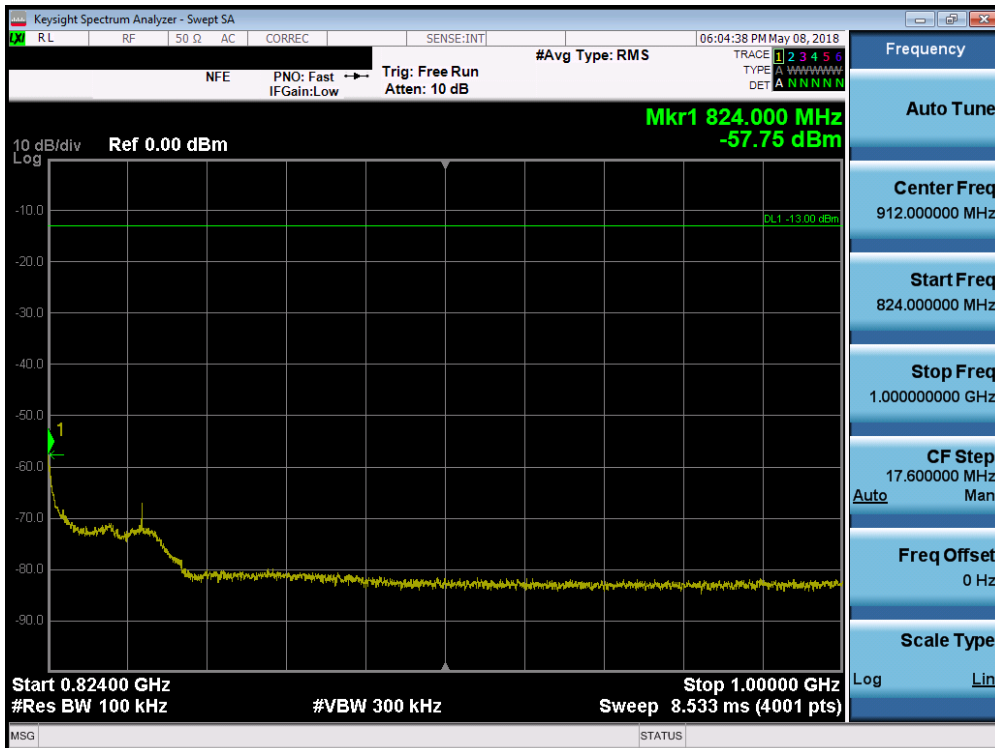


Plot 7-25. Conducted Spurious Plot (CDMA – Ch. 476)

| | | | | |
|---|--|---------------------------------------|---------|---------------------------------|
| FCC ID: A3LSMN960U | PCTEST ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT (CERTIFICATION) | SAMSUNG | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 25 of 63 |

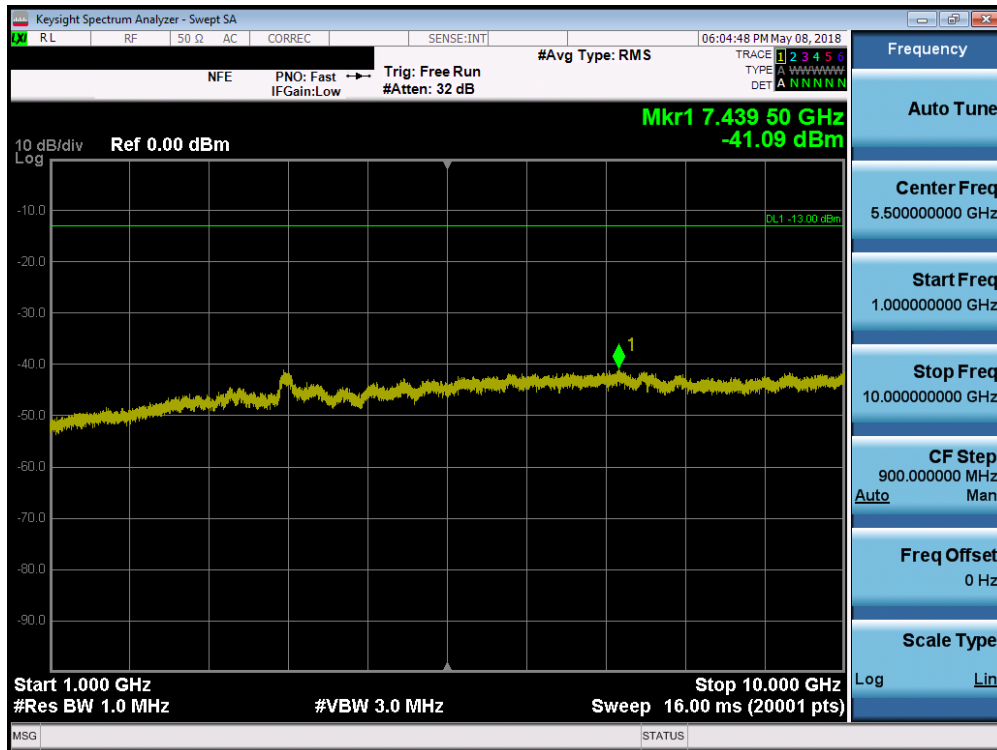


Plot 7-26. Conducted Spurious Plot (CDMA – Ch. 476)

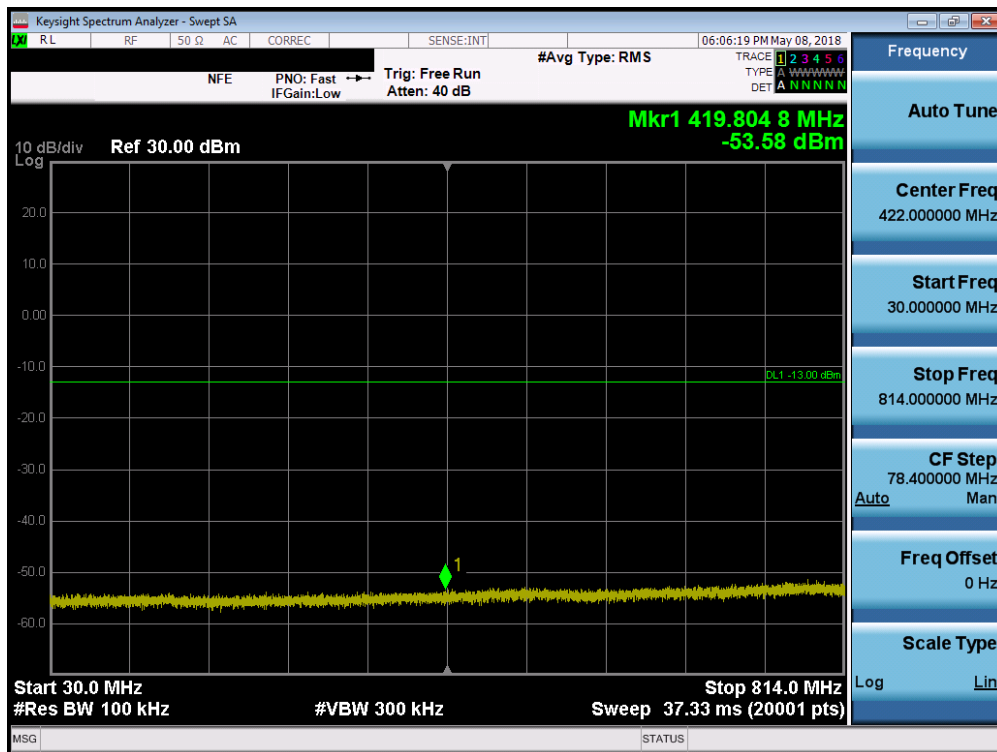


Plot 7-27. Conducted Spurious Plot (CDMA – Ch. 684)

| | | | | |
|---|--|---------------------------------------|--|---------------------------------|
| FCC ID: A3LSMN960U | PCTEST ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 26 of 63 |

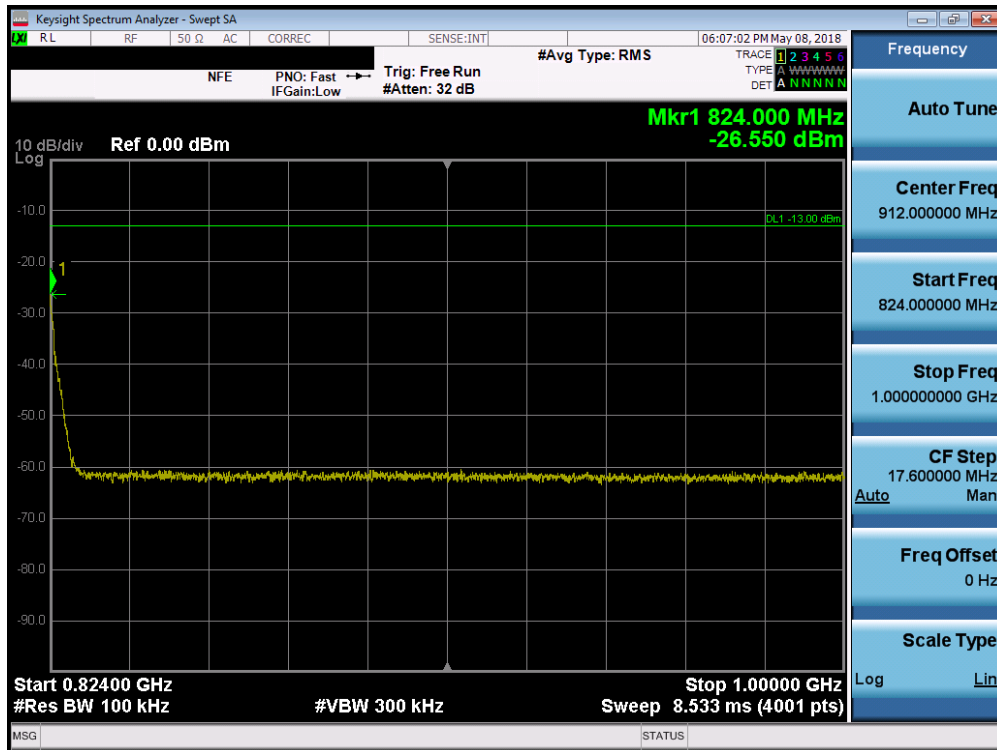


Plot 7-28. Conducted Spurious Plot (CDMA – Ch. 684)

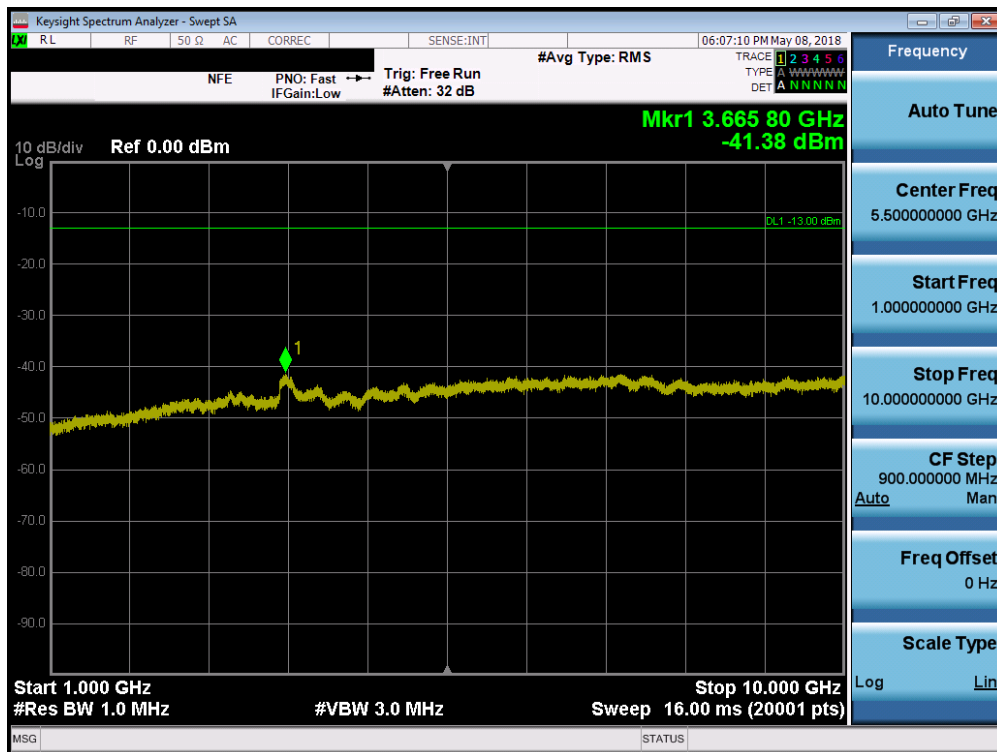


Plot 7-29. Conducted Spurious Plot (CDMA – Ch. 684)

| | | | | |
|---|--|---------------------------------------|--|---------------------------------|
| FCC ID: A3LSMN960U | PCTEST ENGINEERING LABORATORY, INC. | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 27 of 63 |

Band 14

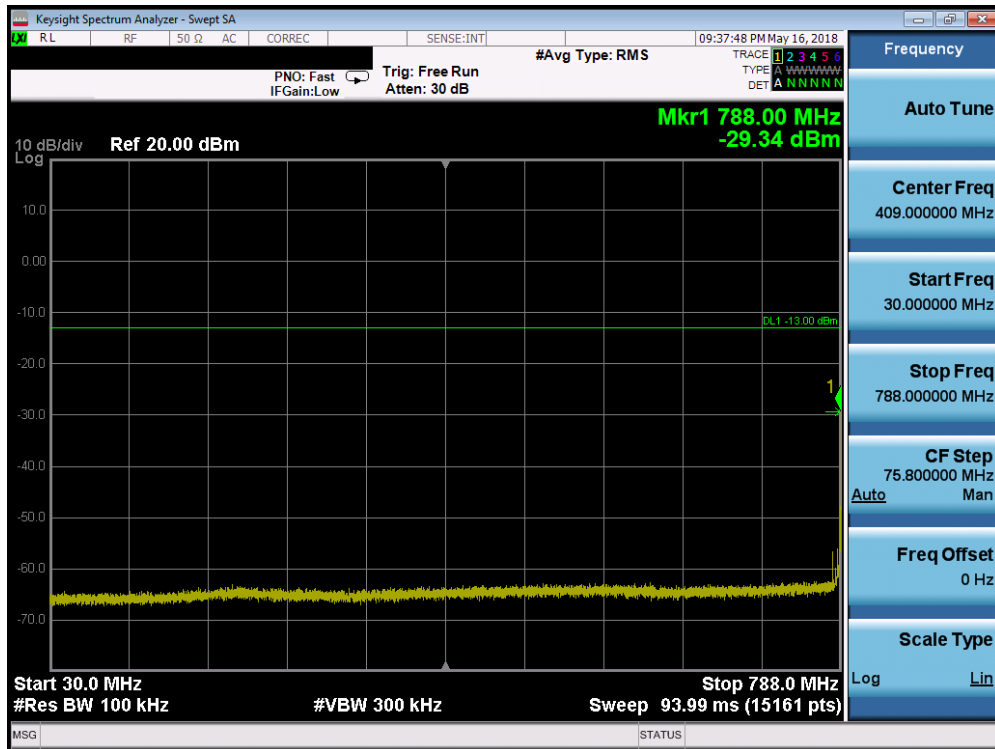


Plot 7-30. Conducted Spurious Plot (LTE B14 – 10MHz QPSK – RB Size 1, RB Offset 0)

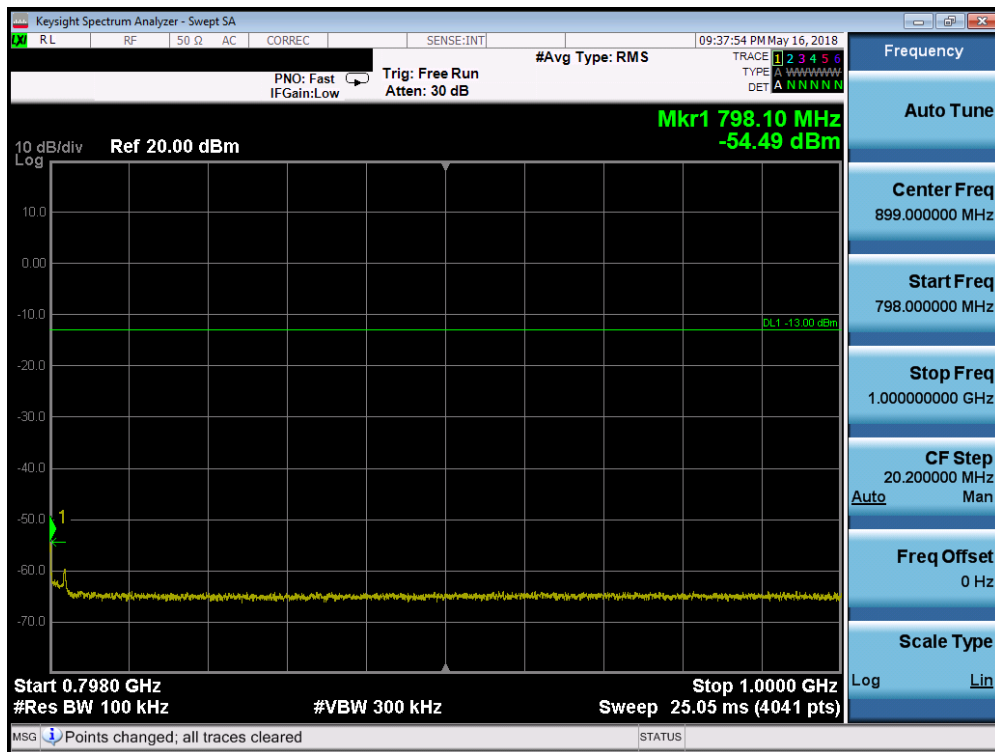

Plot 7-31. Conducted Spurious Plot (LTE B14 – 10MHz QPSK – RB Size 1, RB Offset 0)


| | | | | |
|---|---------------------------------|---------------------------------------|--|---------------------------------|
| FCC ID: A3LSMN960U | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 28 of 63 |

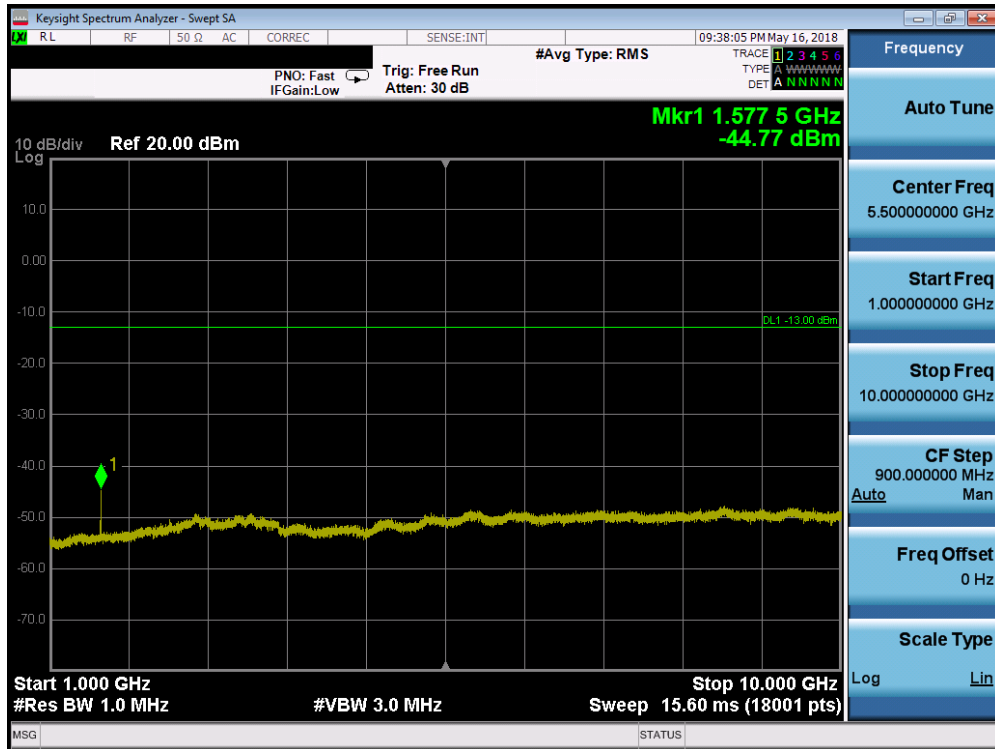


Plot 7-32. Conducted Spurious Plot (LTE B14 – 10MHz QPSK – RB Size 1, RB Offset 0)

| | | | | |
|---|---|-------------------------------|---|---------------------------------|
| FCC ID: A3LSMN960U |  MEASUREMENT REPORT (CERTIFICATION) | |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | Page 29 of 63 | |

Band 26

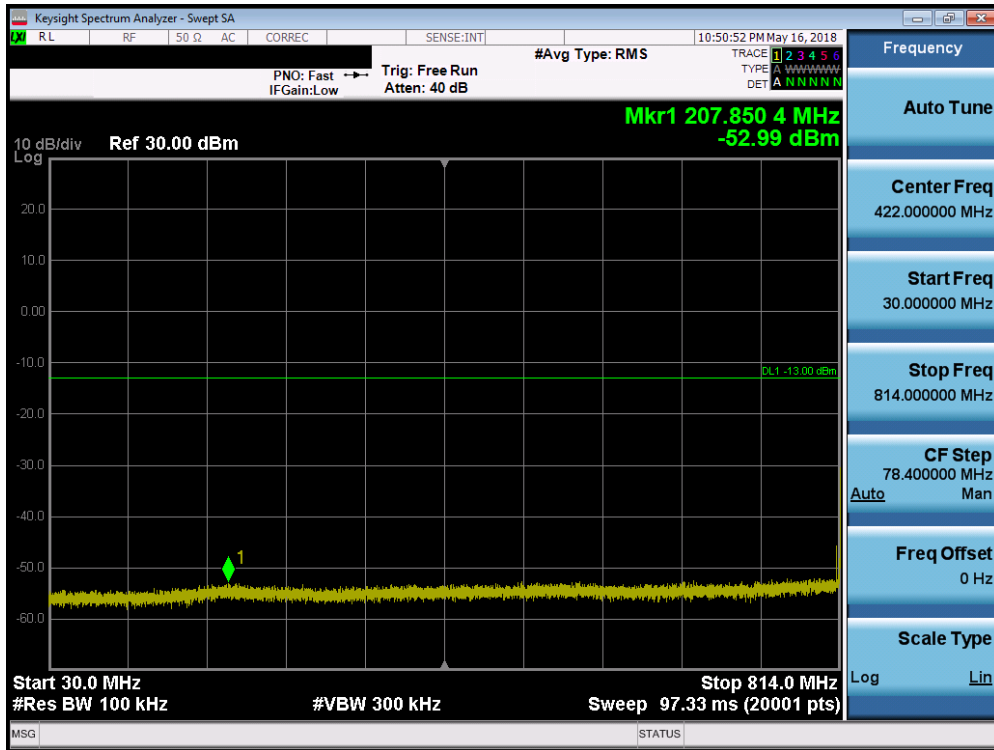


Plot 7-33. Conducted Spurious Plot (LTE B26 – 10MHz QPSK – RB Size 1, RB Offset 0)

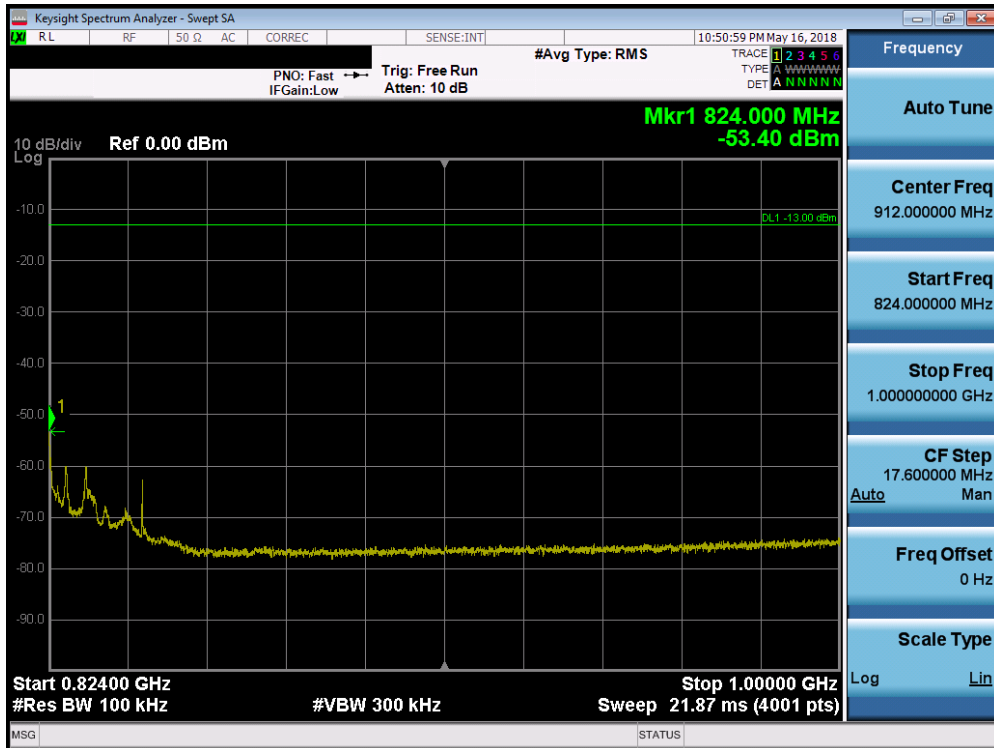

Plot 7-34. Conducted Spurious Plot (LTE B26 – 10MHz QPSK – RB Size 1, RB Offset 0)

| | | | | |
|---|---------------------------------|---------------------------------------|--|---------------------------------|
| FCC ID: A3LSMN960U | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 30 of 63 |

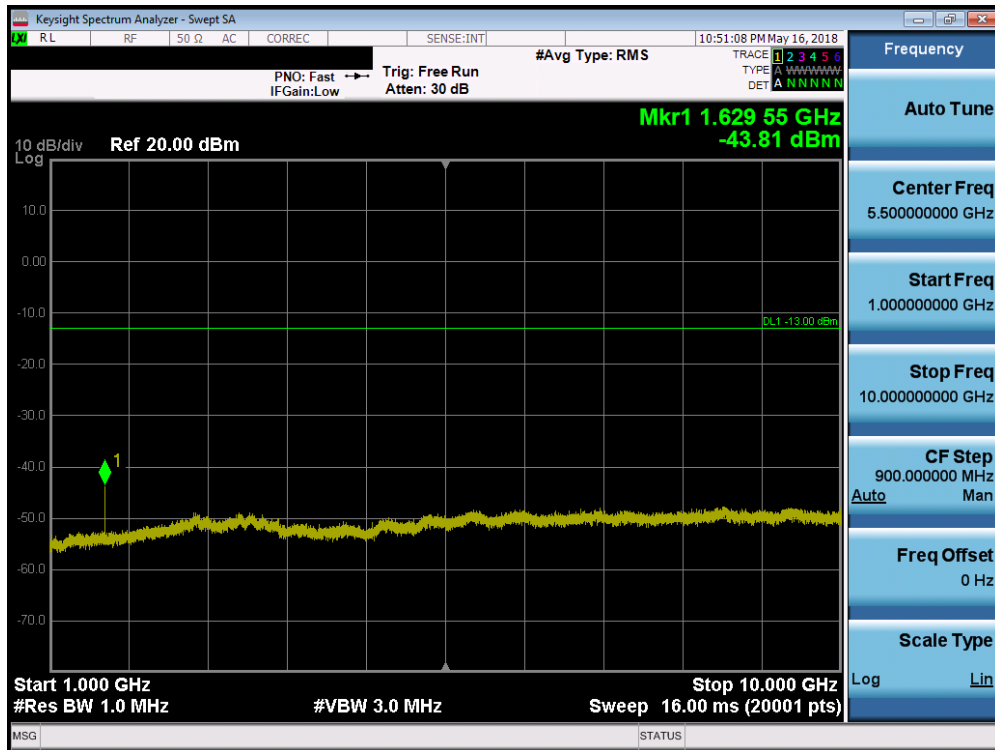

Plot 7-35. Conducted Spurious Plot (LTE B26 – 10MHz QPSK – RB Size 1, RB Offset 0)

| | | | | |
|---|---|-------------------------------|---|---------------------------------|
| FCC ID: A3LSMN960U |  MEASUREMENT REPORT (CERTIFICATION) | |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 31 of 63 |

7.4 Band Edge Emissions at Antenna Terminal

§2.1051 §90.543 §90.691

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission removed from the EA licensee's frequency block by greater than 37.5 kHz is $43 + \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

The minimum permissible attenuation level of any spurious emission removed from the EA licensee's frequency block by up to and including 37.5 kHz is $50 + 10 \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

For Band 14, the minimum permissible attenuation on any frequencies between 775-788 MHz, above 805 MHz, and below 758MHz, shall be at least $43 + \log_{10}(P_{[Watts]})$. On all frequencies between 769-775 MHz and 799-805 MHz, minimum permissible attenuation shall be at least than $65 + 10 \log_{10}(P_{[Watts]})$ in a 6.25kHz band segment.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Span was set large enough so as to capture all out of band emissions near the band edge
2. RBW = 100 kHz
3. VBW = 300 kHz
4. Detector = RMS
5. Trace mode = trace average
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

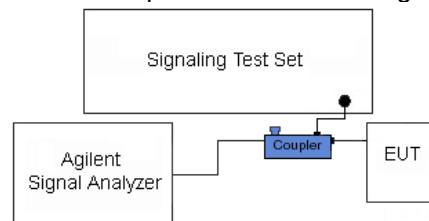


Figure 7-3. Test Instrument & Measurement Setup

| | | | | |
|---|---|-------------------------------|---|---------------------------------|
| FCC ID: A3LSMN960U |  MEASUREMENT REPORT (CERTIFICATION) | |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | Page 32 of 63 | |

Test Notes


For channel edge emission, the signal analyzer's "ACP" measurement capability is used.

Per 22.917(b) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

| | | | | |
|--|---|---|---|--|
| FCC ID: A3LSMN960U |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 33 of 63 |




Plot 7-36. Channel Edge Plot (CDMA BC10 - Ch. 476)

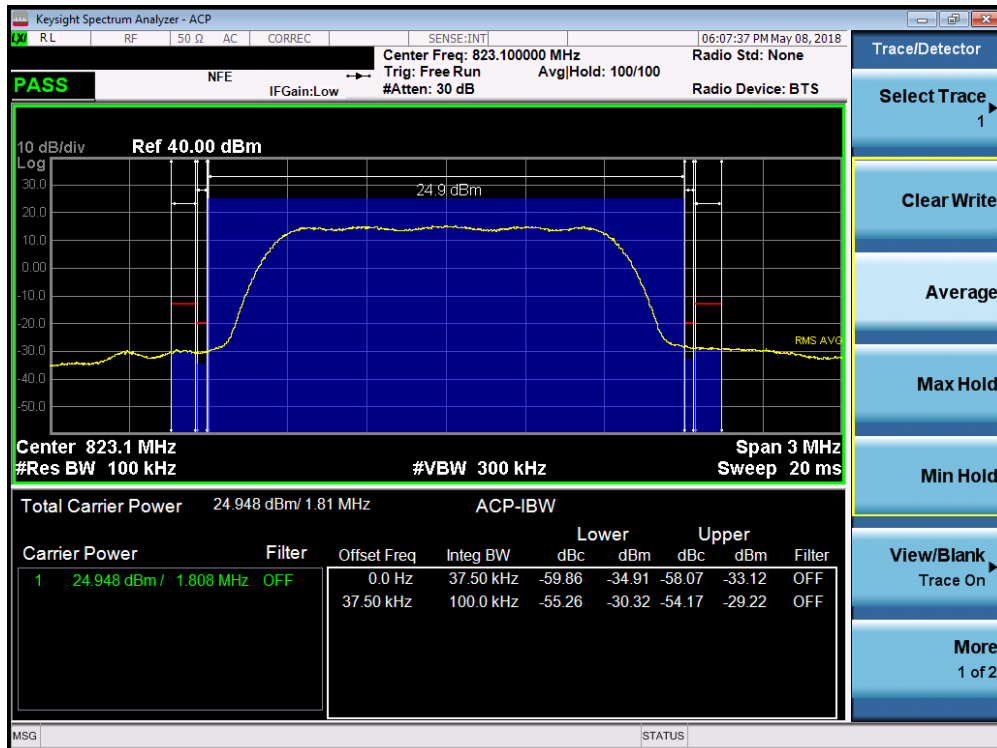


Plot 7-37. Channel Edge Plot (CDMA BC10 - Ch. 684)

| | | | | |
|---|---------------------------------|---------------------------------------|--|---------------------------------|
| FCC ID: A3LSMN960U | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 34 of 63 |

Band 14

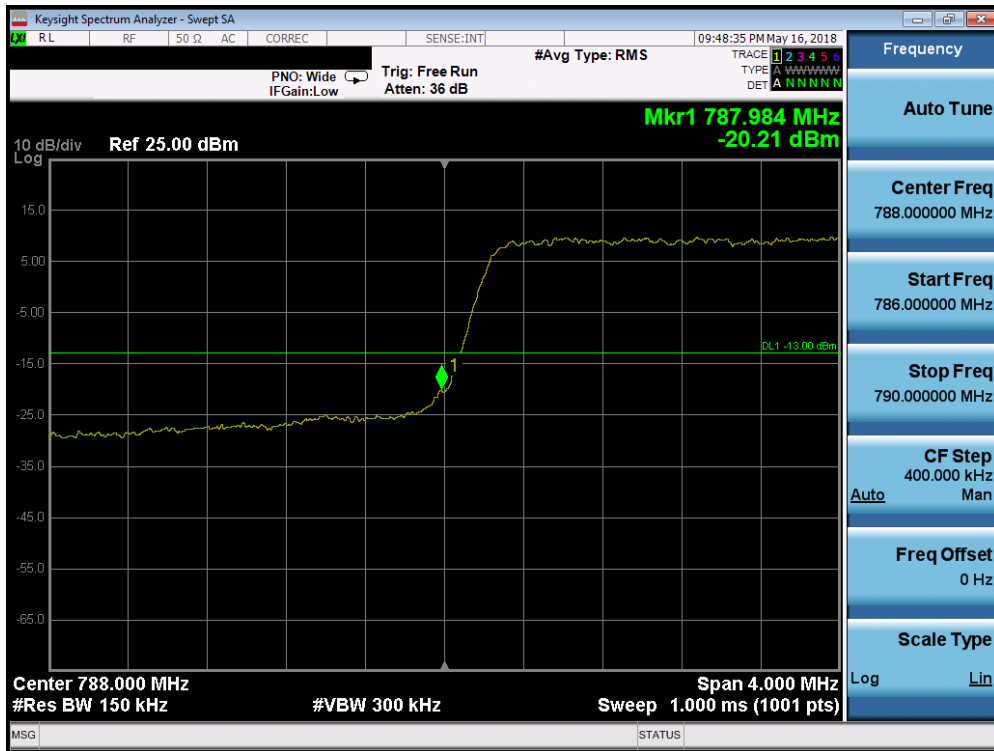

Plot 7-38. Lower Band Edge Plot (LTE Band 14 – 5MHz QPSK – Full RB Configuration)

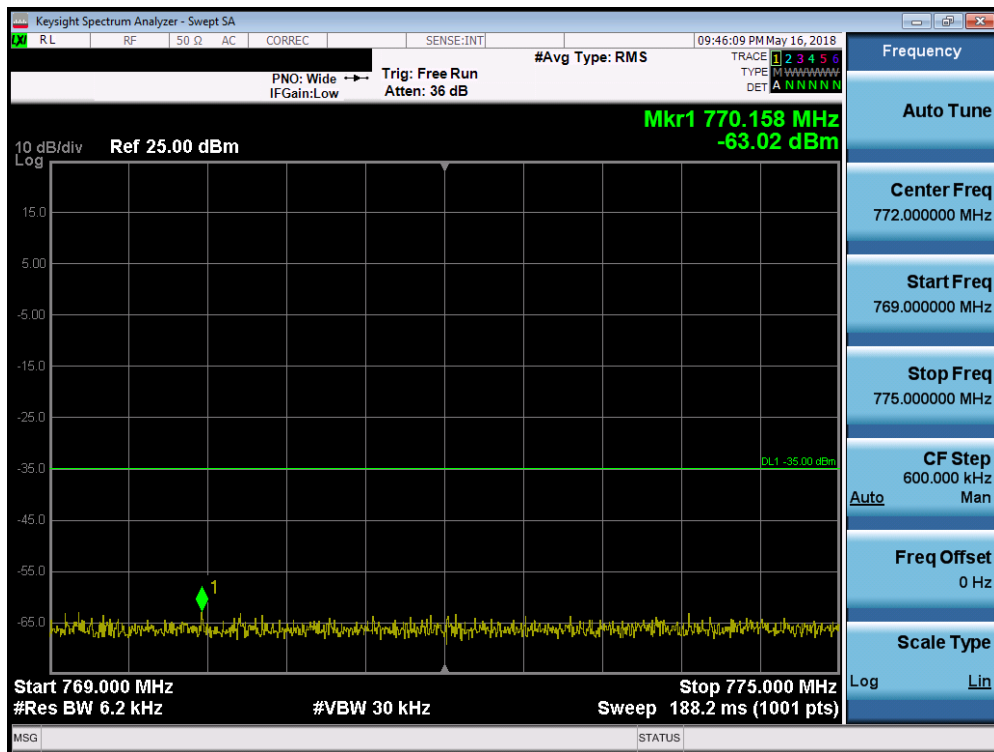


Plot 7-39. Lower Emission Mask Edge Plot (LTE Band 14 – 5MHz QPSK – Full RB Configuration)

| | | | | |
|---|---------------------------------|---------------------------------------|--|---------------------------------|
| FCC ID: A3LSMN960U | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 35 of 63 |




Plot 7-40. Upper Band Edge Plot (LTE Band 14 – 5MHz QPSK – Full RB Configuration)

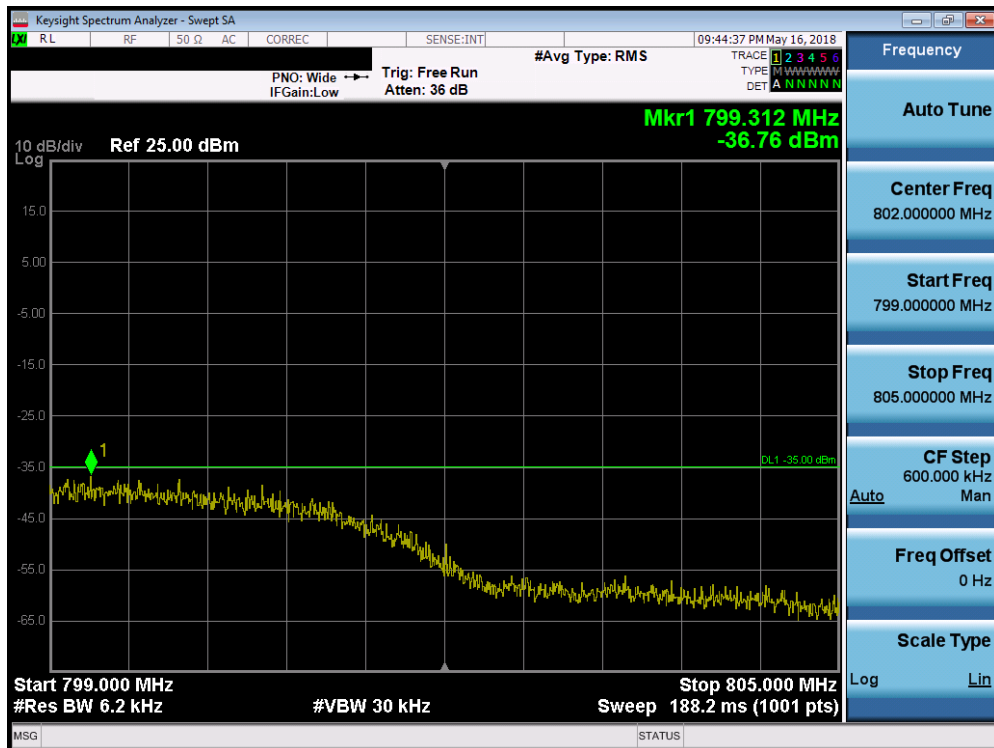


Plot 7-41. Upper Emission Mask Edge Plot (LTE Band 14 – 5MHz QPSK – Full RB Configuration)

| | | | | |
|---|---------------------------------|---------------------------------------|--|---------------------------------|
| FCC ID: A3LSMN960U | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 36 of 63 |

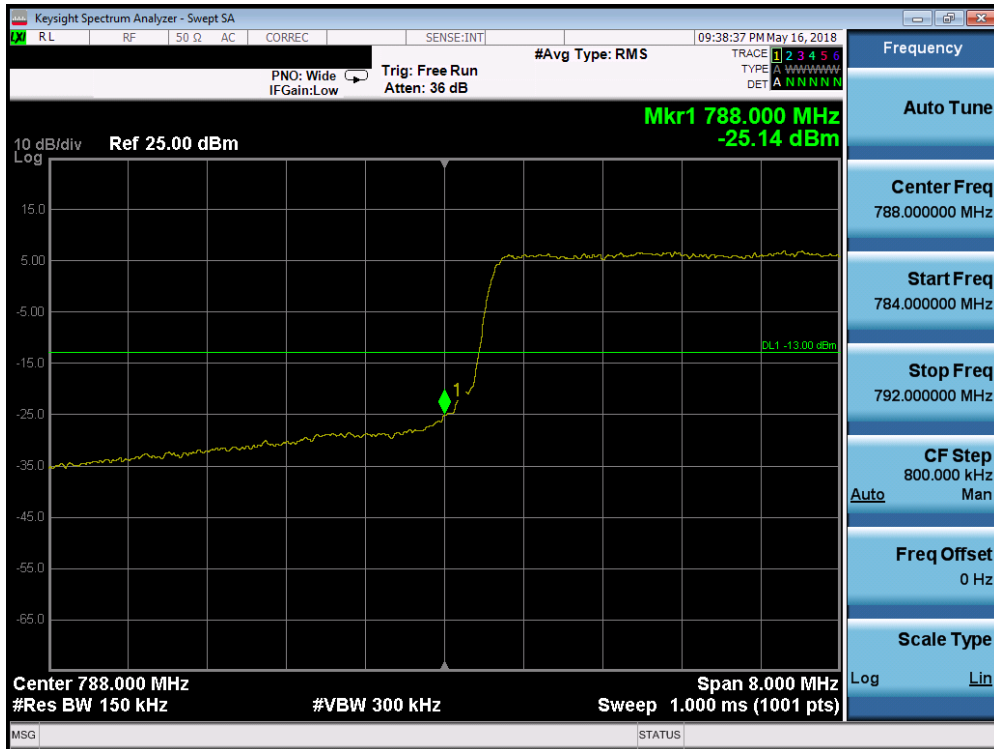

Plot 7-42. Lower Band Edge Plot (LTE Band 14 – 10MHz QPSK – Full RB Configuration)

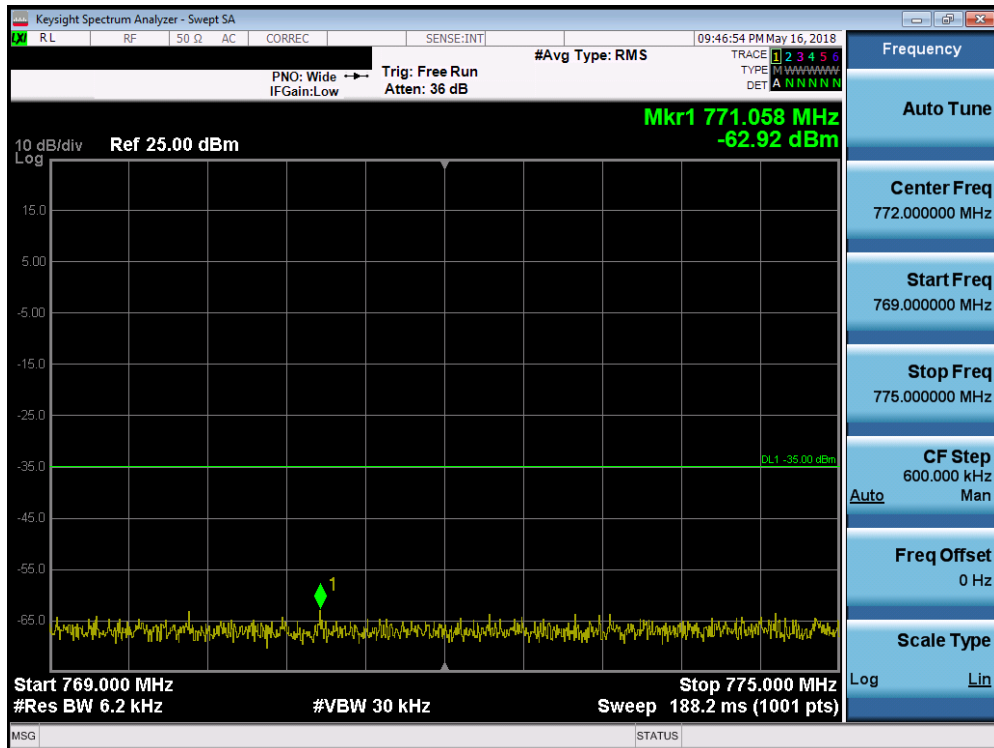


Plot 7-43. Lower Emission Mask Edge Plot (LTE Band 14 – 10MHz QPSK – Full RB Configuration)

| | | | | |
|---|---------------------------------|---------------------------------------|--|---------------------------------|
| FCC ID: A3LSMN960U | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 37 of 63 |




Plot 7-44. Upper Band Edge Plot (LTE Band 14 – 10MHz QPSK – Full RB Configuration)

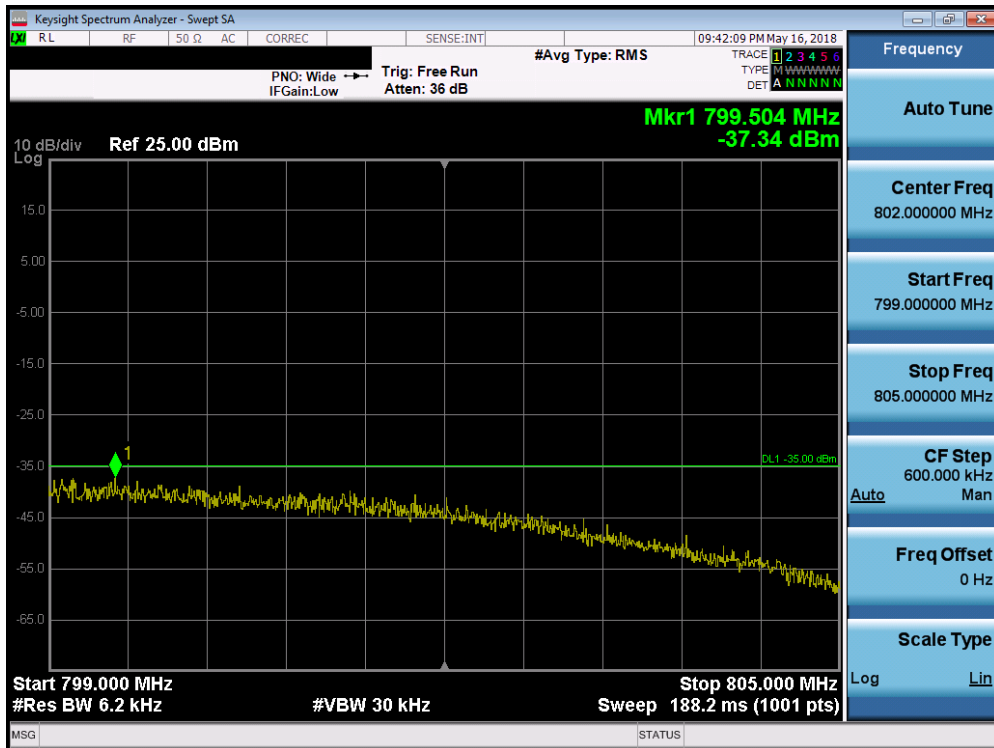


Plot 7-45. Upper Emission Mask Edge Plot (LTE Band 14 – 10MHz QPSK – Full RB Configuration)

| | | | | |
|---|---------------------------------|---------------------------------------|--|---------------------------------|
| FCC ID: A3LSMN960U | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 38 of 63 |

Band 26

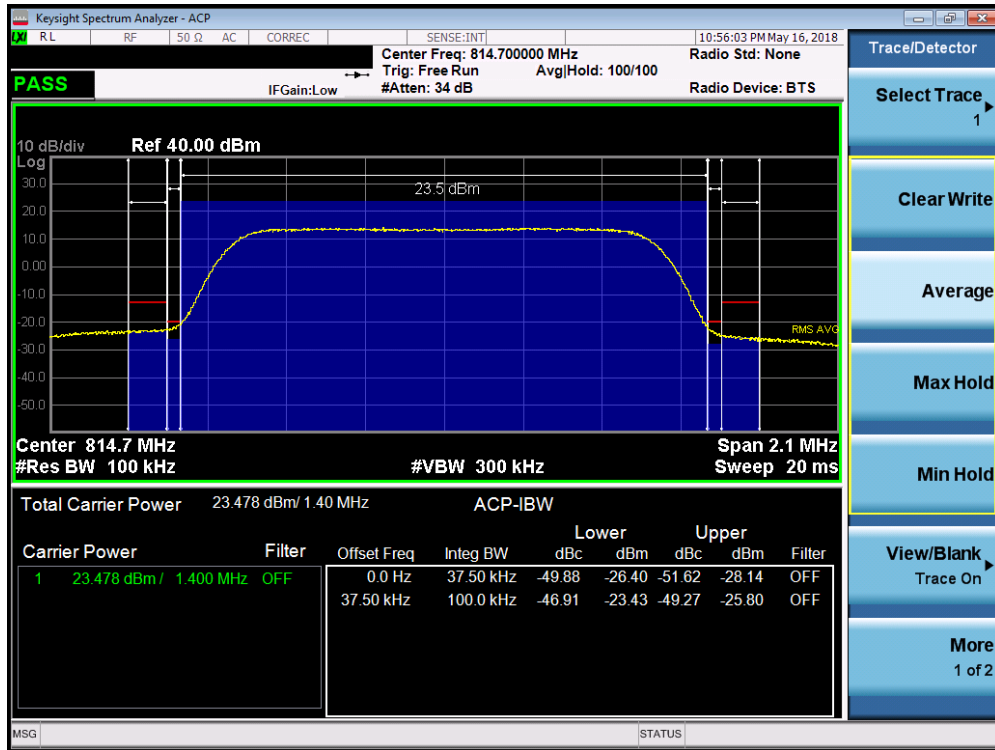


Plot 7-46. Channel Edge Plot (LTE Band 26 – 1.4MHz QPSK – RB Size 6– Low Channel)

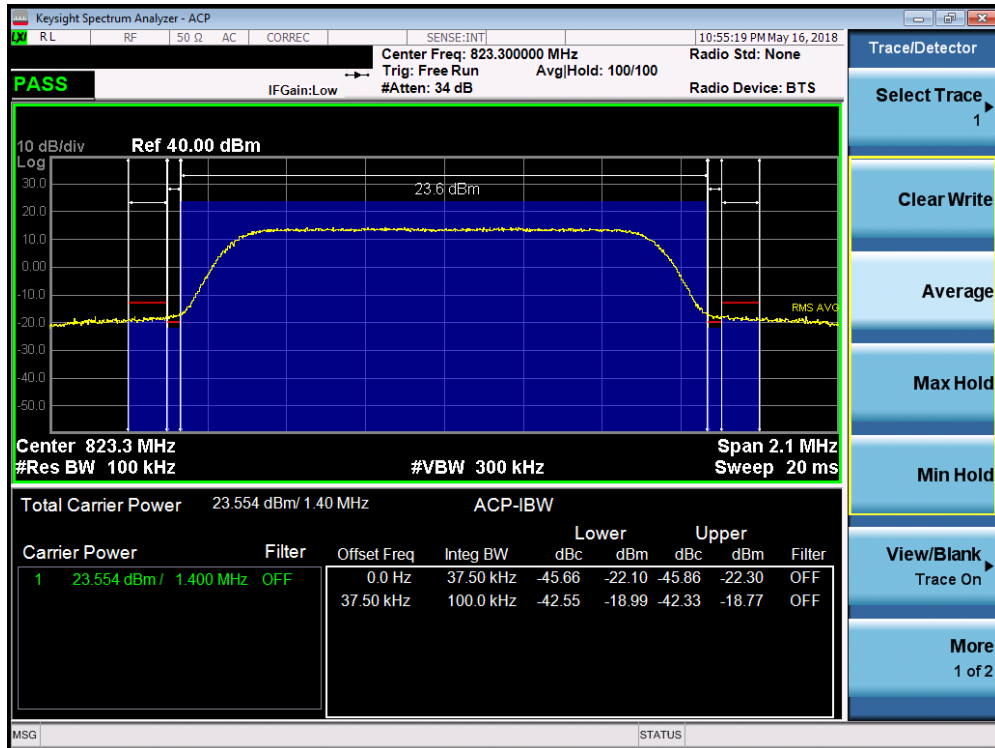


Plot 7-47. Channel Edge Plot (LTE Band 26 – 1.4MHz QPSK – RB Size 6 – High Channel)

| | | | | |
|---|---------------------------------|---------------------------------------|--|---------------------------------|
| FCC ID: A3LSMN960U | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 39 of 63 |

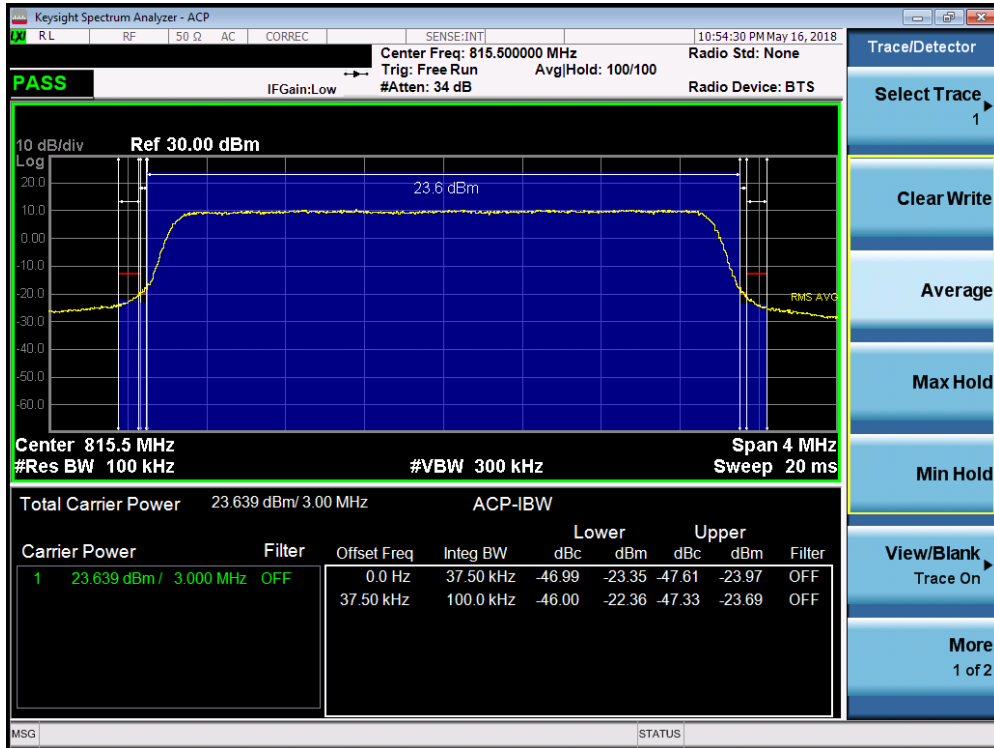


Plot 7-48. Channel Edge Plot (LTE Band 26 – 3MHz QPSK – RB Size 15– Low Channel)

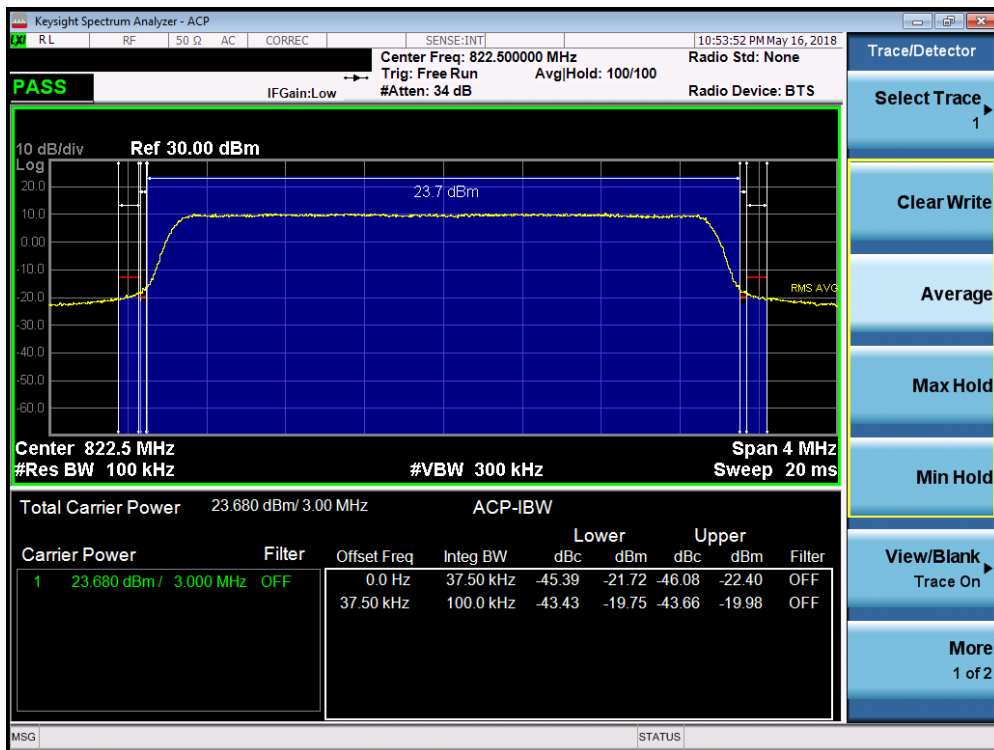


Plot 7-49. Channel Edge Plot (LTE Band 26 – 3MHz QPSK – RB Size 15 – High Channel)

| | | | | |
|---|---------------------------------|---------------------------------------|--|---------------------------------|
| FCC ID: A3LSMN960U | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 40 of 63 |

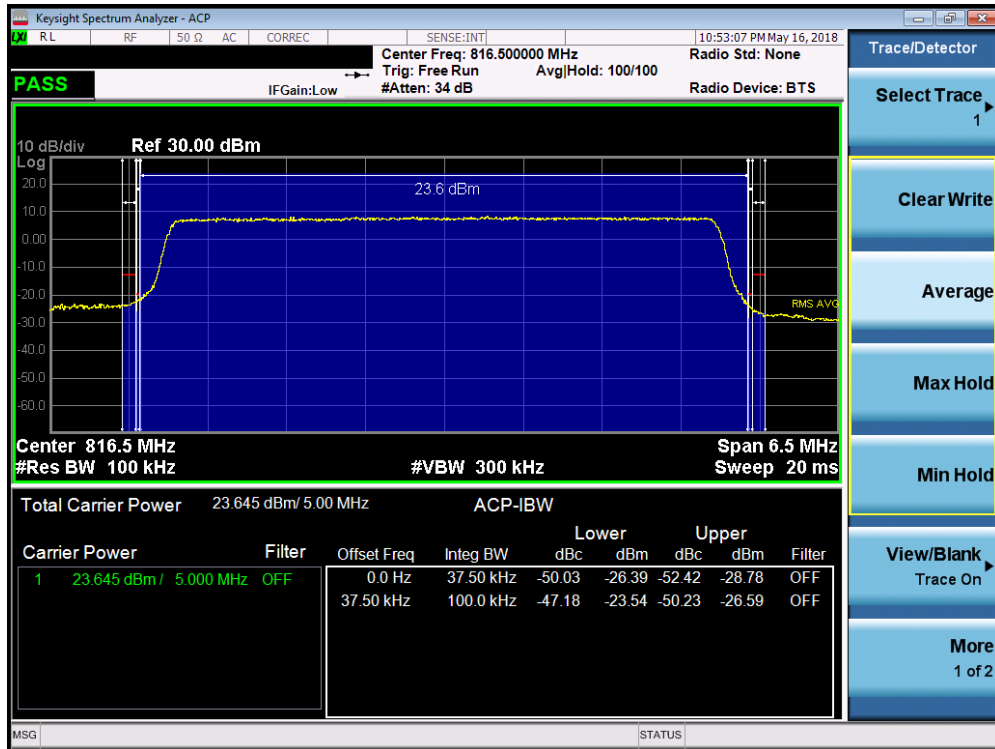


Plot 7-50. Channel Edge Plot (LTE Band 26 – 5MHz QPSK – RB Size 25– Low Channel)

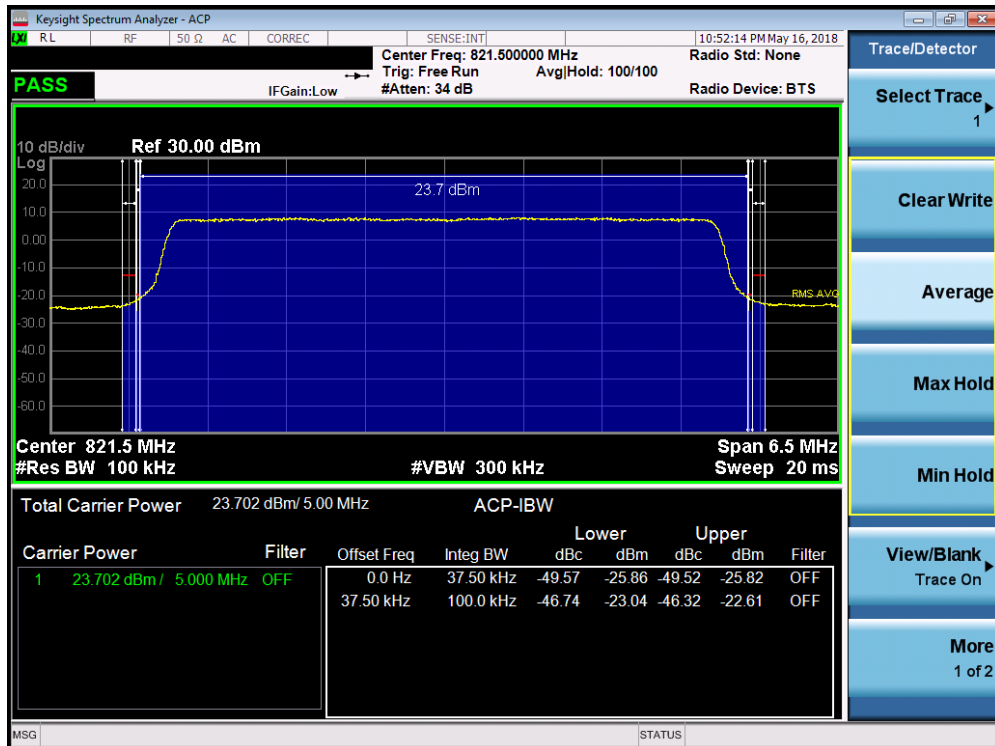


Plot 7-51. Channel Edge Plot (LTE Band 26 – 5MHz QPSK – RB Size 25 – High Channel)

| | | | | |
|---|---------------------------------|---|--|---------------------------------|
| FCC ID: A3LSMN960U | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 41 of 63 |

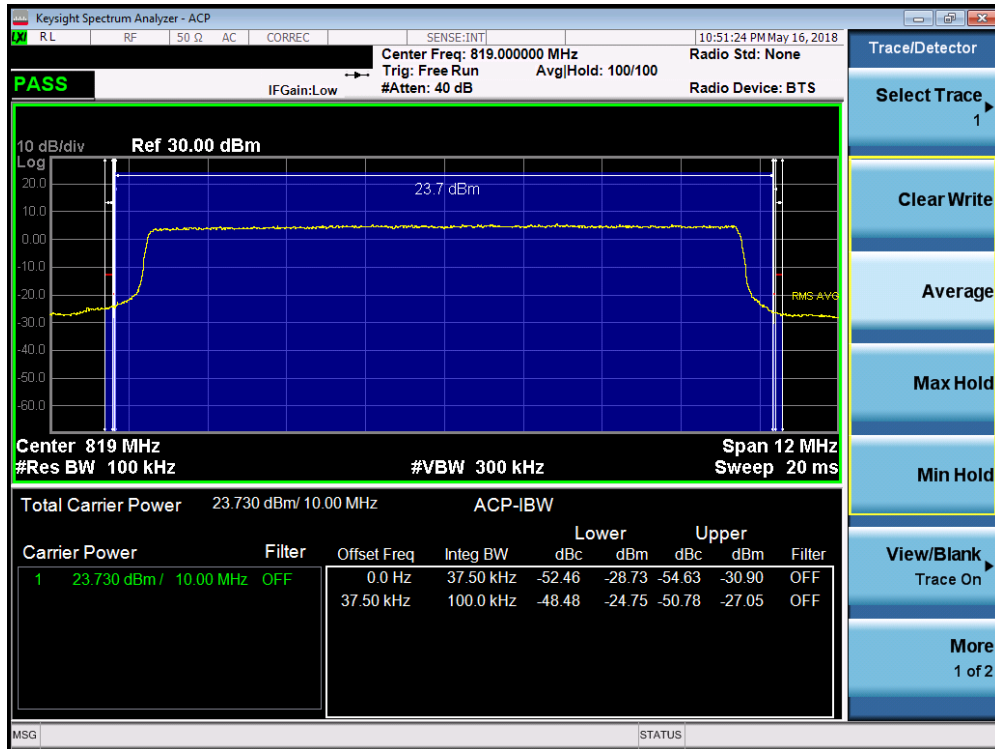

Plot 7-52. Channel Edge Plot (LTE Band 26 – 10MHz QPSK – RB Size 50)

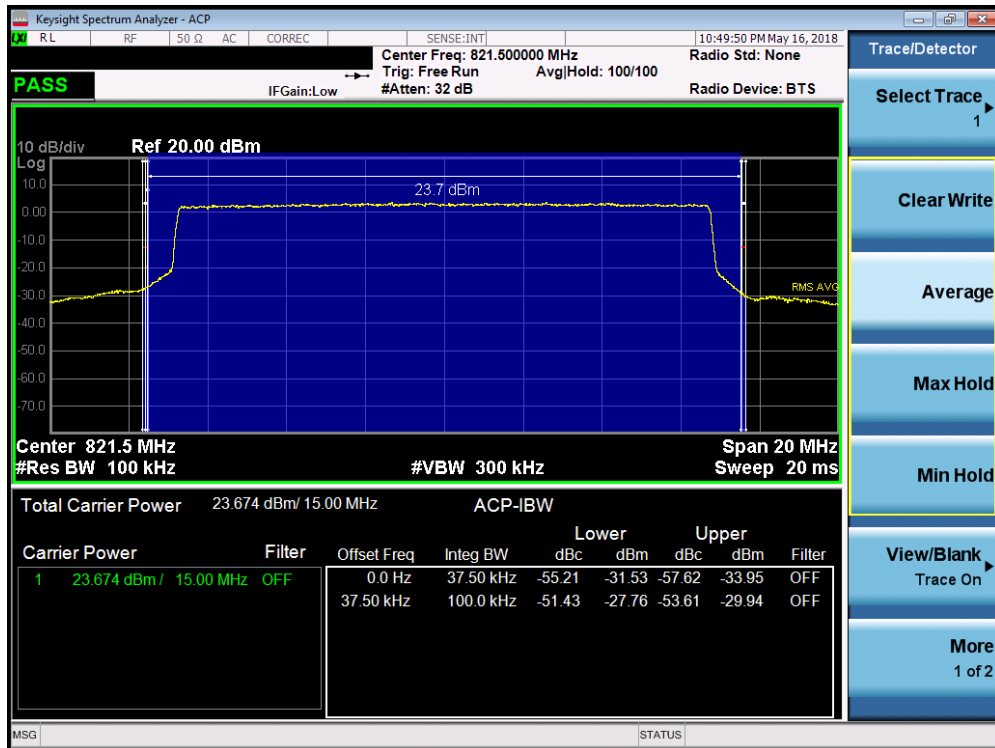

Plot 7-53. Channel Edge Plot (LTE Band 26 – 15MHz QPSK – RB Size 75)

| | | | | |
|---|---------------------------------|---------------------------------------|--|---------------------------------|
| FCC ID: A3LSMN960U | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 42 of 63 |

7.5 Conducted Power Output Data

§90.635

| Frequency [MHz] | BC10 [Channel] | Battery Type | Cond. PWR [dBm] | Cond. PWR [Watts] | Cond. PWR Limit [dBm] | Margin [dB] |
|-----------------|----------------|--------------|-----------------|-------------------|-----------------------|-------------|
| 817.90 | 476 | Standard | 25.14 | 0.327 | 50.00 | -24.86 |
| 823.10 | 684 | Standard | 24.99 | 0.316 | 50.00 | -25.01 |

Table 7-2. CDMA BC10 Conducted Power Output Data

| Frequency [MHz] | Channel Bandwidth [MHz] | Mod. | Cond. PWR [dBm] | Cond. PWR [Watts] |
|-----------------|-------------------------|--------|-----------------|-------------------|
| 793.00 | 5.0 | QPSK | 24.67 | 0.293 |
| 793.00 | 5.0 | 16-QAM | 23.91 | 0.246 |
| 793.00 | 5.0 | 64-QAM | 22.87 | 0.194 |
| 793.00 | 10.0 | QPSK | 24.58 | 0.287 |
| 793.00 | 10.0 | 16-QAM | 23.65 | 0.232 |
| 793.00 | 10.0 | 64-QAM | 22.71 | 0.187 |

Table 7-3. LTE Band 14 Conducted Power Output Data

| | | | | |
|---|---|---------------------------------------|---|---------------------------------|
| FCC ID: A3LSMN960U |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | Page 43 of 63 | |

| Frequency [MHz] | Channel Bandwidth [MHz] | Mod. | Cond. PWR [dBm] | Cond. PWR [Watts] | Cond. PWR Limit [dBm] | Margin [dB] |
|-----------------|-------------------------|--------|-----------------|-------------------|-----------------------|-------------|
| 814.70 | 1.4 | QPSK | 24.66 | 0.292 | 50.00 | -25.34 |
| 823.30 | 1.4 | QPSK | 24.65 | 0.292 | 50.00 | -25.35 |
| 814.70 | 1.4 | 16-QAM | 24.01 | 0.252 | 50.00 | -25.99 |
| 823.30 | 1.4 | 16-QAM | 24.00 | 0.251 | 50.00 | -26.00 |
| 814.70 | 1.4 | 64-QAM | 22.93 | 0.196 | 50.00 | -27.07 |
| 823.30 | 1.4 | 64-QAM | 22.91 | 0.195 | 50.00 | -27.09 |
| 815.50 | 3 | QPSK | 24.73 | 0.297 | 50.00 | -25.27 |
| 822.50 | 3 | QPSK | 24.79 | 0.301 | 50.00 | -25.21 |
| 815.50 | 3 | 16-QAM | 24.07 | 0.255 | 50.00 | -25.93 |
| 822.50 | 3 | 16-QAM | 24.08 | 0.256 | 50.00 | -25.92 |
| 815.50 | 3 | 64-QAM | 23.03 | 0.201 | 50.00 | -26.97 |
| 822.50 | 3 | 64-QAM | 23.05 | 0.202 | 50.00 | -26.95 |
| 816.50 | 5 | QPSK | 24.71 | 0.296 | 50.00 | -25.29 |
| 821.50 | 5 | QPSK | 24.71 | 0.296 | 50.00 | -25.29 |
| 816.50 | 5 | 16-QAM | 24.00 | 0.251 | 50.00 | -26.00 |
| 821.50 | 5 | 16-QAM | 24.02 | 0.252 | 50.00 | -25.98 |
| 816.50 | 5 | 64-QAM | 22.94 | 0.197 | 50.00 | -27.06 |
| 821.50 | 5 | 64-QAM | 22.94 | 0.197 | 50.00 | -27.06 |
| 819.00 | 10 | QPSK | 24.69 | 0.294 | 50.00 | -25.31 |
| 819.00 | 10 | 16-QAM | 24.01 | 0.252 | 50.00 | -25.99 |
| 819.00 | 10 | 64-QAM | 22.95 | 0.197 | 50.00 | -27.05 |
| 821.50 | 15 | QPSK | 24.49 | 0.281 | 50.00 | -25.51 |
| 821.50 | 15 | 16-QAM | 23.87 | 0.244 | 50.00 | -26.13 |
| 821.50 | 15 | 64-QAM | 22.87 | 0.194 | 50.00 | -27.13 |

Table 7-4. LTE Band 26 Conducted Power Output Data

NOTES:

1. For CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits. For LTE mode, the device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1 RB.
2. This unit was tested with its standard battery.

| | | | | |
|---|---|---------------------------------------|---|---------------------------------|
| FCC ID: A3LSMN960U |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | Page 44 of 63 | |

7.6 Radiated Power (ERP) §22.913(a.2)

Test Overview

Effective Radiated Power (ERP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2010 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points \geq 2 x span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”.
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

| | | | | | |
|--|---|--------------------------------------|---|---|--|
| FCC ID: A3LSMN960U |  | | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 45 of 63 | |

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

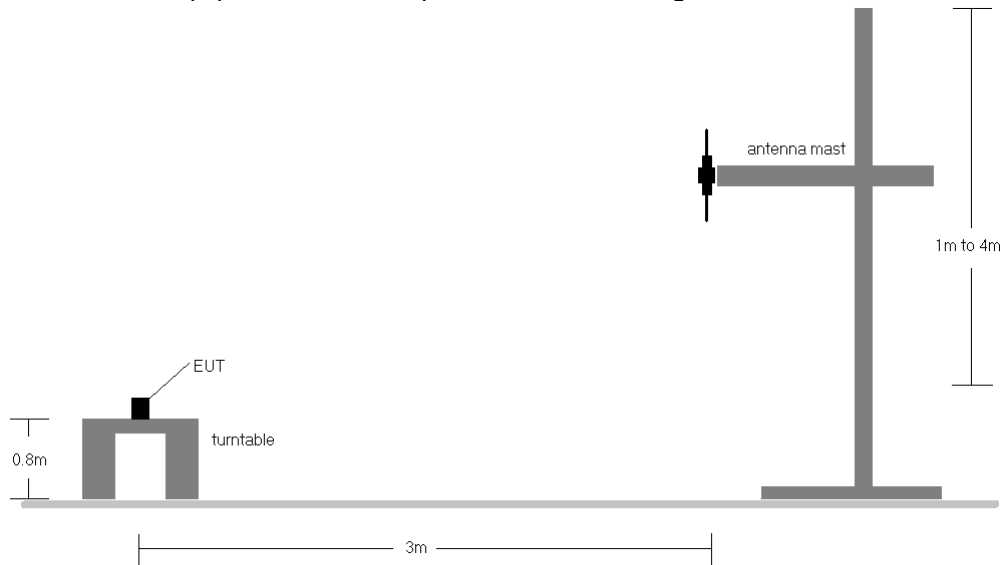


Figure 7-4. Radiated Test Setup <1GHz

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.

| | | | |
|--|---|--------------------------------------|--|
| FCC ID: A3LSMN960U |  MEASUREMENT REPORT (CERTIFICATION)  | | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | Page 46 of 63 |

| Frequency [MHz] | Channel Bandwidth [MHz] | Mod. | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | RB Size/Offset | Substitute Level [dBm] | Ant. Gain [dBi] | ERP [dBm] | ERP [Watts] | ERP Limit [dBm] | Margin [dB] |
|-----------------|-------------------------|--------|-----------------|---------------------|----------------------------|----------------|------------------------|-----------------|--------------|--------------|-----------------|-------------|
| 790.50 | 5 | QPSK | V | 150 | 238 | 1 / 0 | 21.04 | 1.36 | 20.25 | 0.106 | 34.77 | -14.52 |
| 793.00 | 5 | QPSK | V | 150 | 243 | 1 / 0 | 20.96 | 1.37 | 20.18 | 0.104 | 34.77 | -14.59 |
| 795.50 | 5 | QPSK | V | 150 | 236 | 1 / 0 | 20.69 | 1.38 | 19.92 | 0.098 | 34.77 | -14.85 |
| 790.50 | 5 | 16-QAM | V | 150 | 238 | 1 / 0 | 20.20 | 1.36 | 19.41 | 0.087 | 34.77 | -15.36 |
| 790.50 | 5 | 64-QAM | V | 150 | 238 | 1 / 0 | 19.17 | 1.36 | 18.38 | 0.069 | 34.77 | -16.39 |
| 793.00 | 10 | QPSK | V | 150 | 234 | 1 / 0 | 20.86 | 1.37 | 20.08 | 0.102 | 34.77 | -14.69 |
| 793.00 | 10 | 16-QAM | V | 150 | 234 | 1 / 0 | 20.14 | 1.37 | 19.36 | 0.086 | 34.77 | -15.41 |
| 793.00 | 10 | 64-QAM | V | 150 | 234 | 1 / 0 | 19.11 | 1.37 | 18.33 | 0.068 | 34.77 | -16.44 |
| 790.50 | 5 | QPSK | H | 150 | 278 | 1 / 0 | 19.11 | 1.36 | 18.32 | 0.068 | 34.77 | -16.45 |
| 790.50 | 5 (WCP) | QPSK | V | 150 | 28 | 1 / 0 | 20.76 | 1.36 | 19.97 | 0.099 | 34.77 | -14.80 |

Table 7-5. ERP Data (Band 14)

| Frequency [MHz] | Channel Bandwidth [MHz] | Mod. | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | RB Size/Offset | Substitute Level [dBm] | Ant. Gain [dBi] | ERP [dBm] | ERP [Watts] | ERP Limit [dBm] | Margin [dB] |
|-----------------|-------------------------|--------|-----------------|---------------------|----------------------------|----------------|------------------------|-----------------|--------------|--------------|-----------------|-------------|
| 821.50 | 15 | QPSK | H | 150 | 33 | 1 / 74 | 21.25 | 1.49 | 20.59 | 0.114 | 38.45 | -17.86 |
| 821.50 | 15 | 16-QAM | H | 150 | 33 | 1 / 74 | 19.64 | 1.49 | 18.98 | 0.079 | 38.45 | -19.47 |
| 821.50 | 15 | 64-QAM | H | 150 | 33 | 1 / 74 | 18.81 | 1.49 | 18.15 | 0.065 | 38.45 | -20.30 |
| 821.50 | 15 | QPSK | V | 150 | 222 | 1 / 74 | 20.54 | 1.49 | 19.88 | 0.097 | 38.45 | -18.57 |
| 821.50 | 15 (WCP) | QPSK | H | 150 | 25 | 1 / 74 | 20.86 | 1.49 | 20.20 | 0.105 | 38.45 | -18.25 |

Table 7-6. ERP Data (Band 26)

| | | | | | |
|---|---|-------------------------------|---------------------------------------|---|---------------------------------|
| FCC ID: A3LSMN960U |  | | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 47 of 63 | |

7.7 Radiated Spurious Emissions Measurements

§2.1053 §90.691

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI/TIA-603-E-2010 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points \geq 2 x span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

| | | | | |
|---|---|---------------------------------------|---|---------------------------------|
| FCC ID: A3LSMN960U |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | Page 48 of 63 | |

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

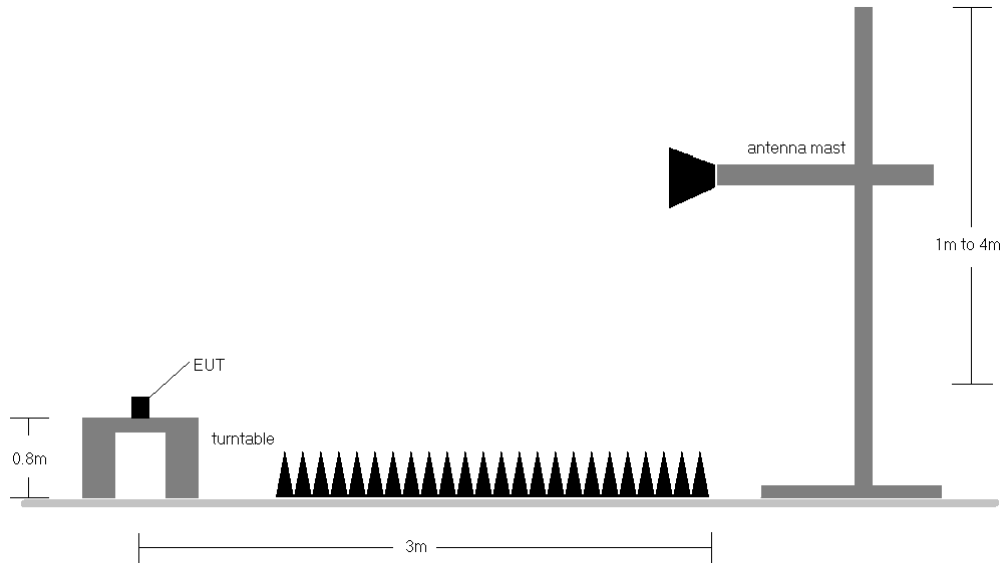


Figure 7-5. Test Instrument & Measurement Setup

Test Notes

1. For CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. For LTE mode, the device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1 RB.
3. This unit was tested with its standard battery.
4. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
5. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

| | | | | |
|---|---|---------------------------------------|---|---------------------------------|
| FCC ID: A3LSMN960U |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 49 of 63 |

CDMA/EvDO

OPERATING FREQUENCY: 817.90 MHz
 CHANNEL: 476
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 1635.80 | V | 112 | 341 | -78.65 | 8.91 | -69.74 | -56.7 |
| 2453.70 | V | 140 | 309 | -73.95 | 9.12 | -64.83 | -51.8 |
| 3271.60 | V | - | - | -74.80 | 9.39 | -65.41 | -52.4 |
| 4089.50 | V | - | - | -73.26 | 9.61 | -63.66 | -50.7 |

Table 7-7. CDMA BC10 Radiated Spurious Data (Ch. 476)

OPERATING FREQUENCY: 823.10 MHz
 CHANNEL: 684
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 1646.20 | V | 227 | 352 | -79.33 | 8.87 | -70.46 | -57.5 |
| 2469.30 | V | 117 | 311 | -73.90 | 9.17 | -64.74 | -51.7 |
| 3292.40 | V | - | - | -74.53 | 9.42 | -65.11 | -52.1 |
| 4115.50 | V | - | - | -73.11 | 9.79 | -63.32 | -50.3 |

Table 7-8. CDMA BC10 Radiated Spurious Data (Ch. 684)

| | | | | | |
|---|---|-------------------------------|---------------------------------------|---|---------------------------------|
| FCC ID: A3LSMN960U |  | | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | Page 50 of 63 | | |

OPERATING FREQUENCY: 817.90 MHz
 CHANNEL: 476
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 1635.80 | H | 100 | 69 | -76.08 | 8.91 | -67.17 | -54.2 |
| 2453.70 | H | - | - | -77.18 | 9.12 | -68.06 | -55.1 |
| 3271.60 | H | - | - | -74.57 | 9.39 | -65.18 | -52.2 |

Table 7-9. CDMA BC10 Radiated Spurious Data with WCP (Ch. 476)

| | | | | | |
|---|---|---------------------------------------|--|---|---------------------------------|
| FCC ID: A3LSMN960U |  | MEASUREMENT REPORT (CERTIFICATION) | |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | | Page 51 of 63 |

Band 14

OPERATING FREQUENCY: 793.00 MHz
 CHANNEL: 23330
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 2379.00 | V | - | - | -66.51 | 4.95 | -61.55 | -48.6 |
| 3172.00 | V | - | - | -66.17 | 6.10 | -60.07 | -47.1 |

Table 7-10. Radiated Spurious Data (LTE Band 14 – Mid Channel)

MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.00 MHz
 DISTANCE: 3 meters
 NARROWBAND EMISSION LIMIT: -50 dBm
 WIDEBAND EMISSION LIMIT: -40 dBm/MHz

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 1586.00 | V | - | - | -70.22 | 4.59 | -65.62 | -25.6 |

Table 7-11. Radiated Spurious Data (LTE Band 14 –1559-1610MHz Band)

| | | | | | |
|---|---|---------------------------------------|--|---|---------------------------------|
| FCC ID: A3LSMN960U |  | MEASUREMENT REPORT (CERTIFICATION) | |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 52 of 63 | |

OPERATING FREQUENCY: 793.00 MHz
 CHANNEL: 23330
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 2379.00 | V | - | - | -56.41 | 4.94 | -51.47 | -38.5 |
| 3172.00 | V | - | - | -56.10 | 6.09 | -50.00 | -37.0 |

Table 7-12. Radiated Spurious Data with WCP (LTE Band 14 – Mid Channel)

MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.00 MHz
 DISTANCE: 3 meters
 NARROWBAND EMISSION LIMIT: -50 dBm
 WIDEBAND EMISSION LIMIT: -40 dBm/MHz

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 1586.00 | V | - | - | -59.93 | 4.59 | -55.34 | -15.3 |

Table 7-13. Radiated Spurious Data with WCP (LTE Band 14 –1559-1610MHz Band)

| | | | | | |
|---|---|---------------------------------------|--|---|---------------------------------|
| FCC ID: A3LSMN960U |  | MEASUREMENT REPORT (CERTIFICATION) | |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 53 of 63 | |

Band 26

OPERATING FREQUENCY: 815.50 MHz
 CHANNEL: 26705
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 1631.00 | H | - | - | -60.13 | 4.77 | -55.36 | -42.4 |
| 2446.50 | H | - | - | -57.09 | 4.94 | -52.15 | -39.2 |

Table 7-14. Radiated Spurious Data (Ch. 26705)

OPERATING FREQUENCY: 822.50 MHz
 CHANNEL: 26775
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 1645.00 | H | - | - | -59.99 | 4.80 | -55.19 | -42.2 |
| 2467.50 | H | - | - | -56.13 | 4.98 | -51.15 | -38.2 |

Table 7-15. Radiated Spurious Data (Ch. 26775)

| | | | | | |
|---|---|-------------------------------|---------------------------------------|---|---------------------------------|
| FCC ID: A3LSMN960U |  | | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 54 of 63 | |

OPERATING FREQUENCY: 822.50 MHz
 CHANNEL: 26775
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 1645.00 | H | - | - | -60.04 | 4.80 | -55.24 | -42.2 |
| 2467.50 | H | - | - | -56.83 | 4.98 | -51.85 | -38.9 |

Table 7-16. Radiated Spurious Data with WCP (Ch. 26775)

| | | | | | |
|---|---|-------------------------------|------------------------------------|---|---------------------------------|
| FCC ID: A3LSMN960U |  | | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | | Page 55 of 63 |

7.8 Frequency Stability / Temperature Variation

§2.1055 §90.213

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2010. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency.

Test Procedure Used

ANSI/TIA-603-E-2010

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

| | | | | |
|---|---|---------------------------------------|---|---------------------------------|
| FCC ID: A3LSMN960U |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | Page 56 of 63 | |

Frequency Stability / Temperature Variation
\$2.1055, \$90.213

OPERATING FREQUENCY: 817,900,000 Hz
 CHANNEL: 476
 REFERENCE VOLTAGE: 3.85 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

| VOLTAGE (%) | POWER (VDC) | TEMP (°C) | FREQUENCY (Hz) | Freq. Dev. (Hz) | Deviation (%) |
|----------------|-------------|------------|----------------|-----------------|---------------|
| 100 % | 3.85 | + 20 (Ref) | 817,899,810 | -190 | -0.0000232 |
| 100 % | | - 30 | 817,899,913 | -87 | -0.0000106 |
| 100 % | | - 20 | 817,900,236 | 236 | 0.0000289 |
| 100 % | | - 10 | 817,900,026 | 26 | 0.0000032 |
| 100 % | | 0 | 817,900,043 | 43 | 0.0000053 |
| 100 % | | + 10 | 817,899,788 | -212 | -0.0000259 |
| 100 % | | + 20 | 817,899,910 | -90 | -0.0000110 |
| 100 % | | + 30 | 817,900,013 | 13 | 0.0000016 |
| 100 % | | + 40 | 817,899,681 | -319 | -0.0000390 |
| 100 % | | + 50 | 817,900,197 | 197 | 0.0000241 |
| BATT. ENDPOINT | 3.45 | + 20 | 817,900,293 | 293 | 0.0000358 |

Table 7-17. CDMA BC10 Frequency Stability Data (Ch. 670)

| | | | | |
|---|---|---------------------------------------|---|---------------------------------|
| FCC ID: A3LSMN960U |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | Page 57 of 63 | |

Frequency Stability / Temperature Variation
\$2.1055, \$90.213

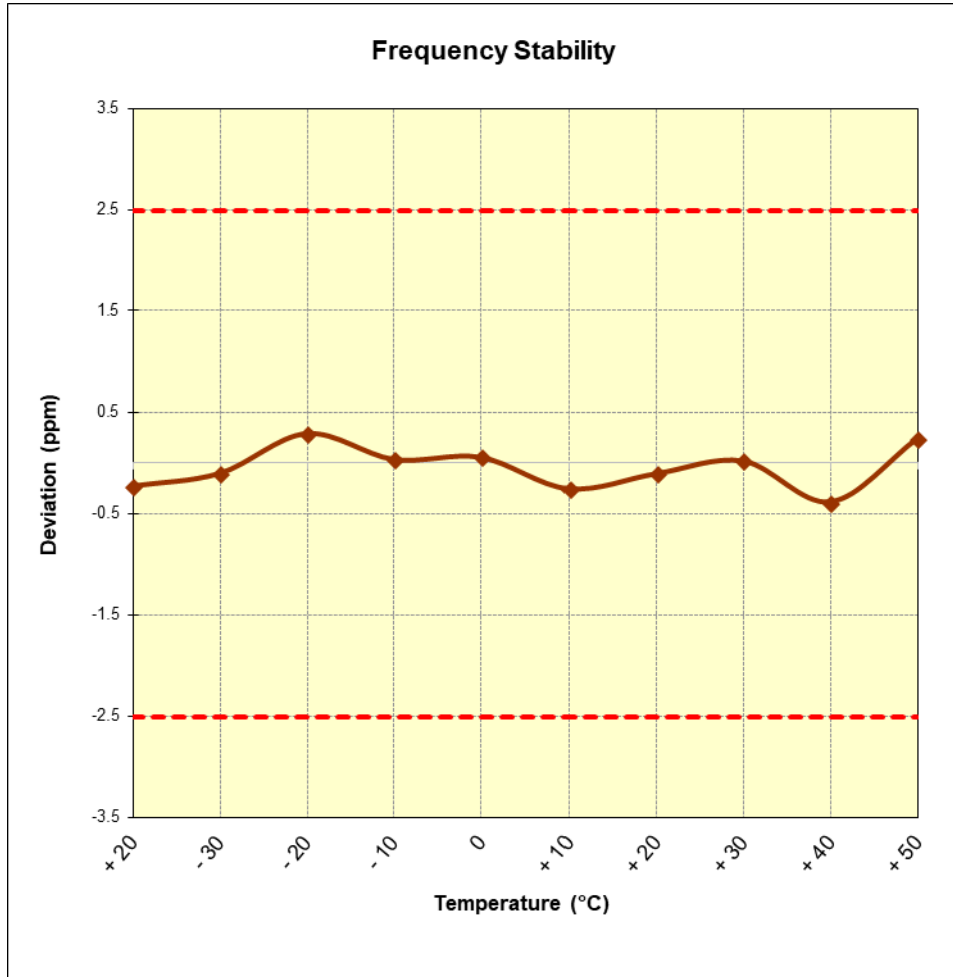


Figure 7-6. CDMA BC10 Frequency Stability Graph (Ch. 670)

| | | | | |
|---|---|---------------------------------------|---|---------------------------------|
| FCC ID: A3LSMN960U |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 58 of 63 |

Band 14 Frequency Stability / Temperature Variation
§2.1055, §90.213

OPERATING FREQUENCY: 793,000,000 Hz
 CHANNEL: 23330
 REFERENCE VOLTAGE: 3.85 VDC

| VOLTAGE (%) | POWER (VDC) | TEMP (°C) | FREQUENCY (Hz) | Freq. Dev. (Hz) | Deviation (%) |
|----------------|-------------|------------|----------------|-----------------|---------------|
| 100 % | 3.85 | + 20 (Ref) | 793,000,186 | 186 | 0.0000235 |
| 100 % | | - 30 | 793,000,244 | 244 | 0.0000308 |
| 100 % | | - 20 | 792,999,982 | -18 | -0.0000023 |
| 100 % | | - 10 | 792,999,747 | -253 | -0.0000319 |
| 100 % | | 0 | 793,000,019 | 19 | 0.0000024 |
| 100 % | | + 10 | 792,999,895 | -105 | -0.0000132 |
| 100 % | | + 20 | 792,999,999 | -1 | -0.0000001 |
| 100 % | | + 30 | 793,000,155 | 155 | 0.0000195 |
| 100 % | | + 40 | 793,000,024 | 24 | 0.0000030 |
| 100 % | | + 50 | 792,999,893 | -107 | -0.0000135 |
| BATT. ENDPOINT | | 3.45 | + 20 | 792,999,938 | -62 |

Table 7-18. LTE Band 14 Frequency Stability Data (Ch. 23330)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

| | | | | |
|---|---|---------------------------------------|---|---------------------------------|
| FCC ID: A3LSMN960U |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | Page 59 of 63 | |

Band 14 Frequency Stability / Temperature Variation
\$2.1055, \$90.213

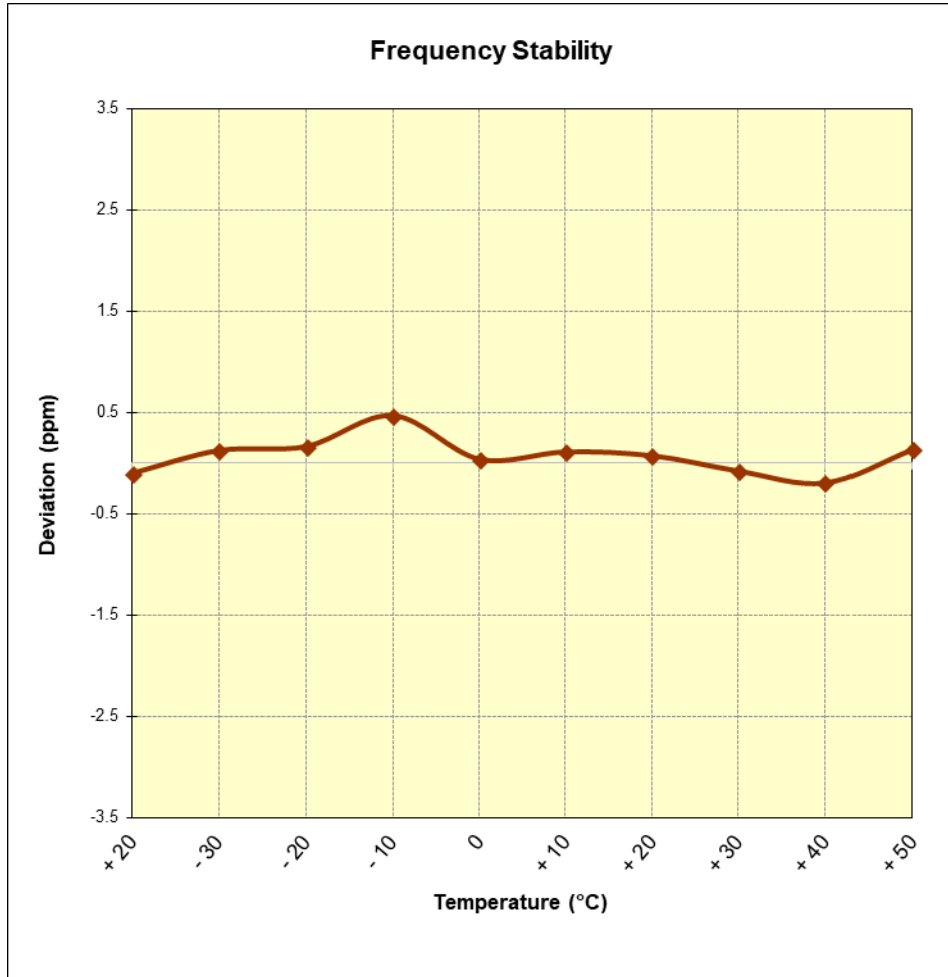


Table 7-19. LTE Band 26 Frequency Stability Data (Ch. 23330)

| | | | |
|---|---|-------------------------------|---------------------------------|
| FCC ID: A3LSMN960U |  MEASUREMENT REPORT (CERTIFICATION)  | | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | Page 60 of 63 |

Band 26 Frequency Stability / Temperature Variation
\$2.1055, \$90.213

OPERATING FREQUENCY: 819,000,000 Hz
 CHANNEL: 26740
 REFERENCE VOLTAGE: 3.85 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

| VOLTAGE (%) | POWER (VDC) | TEMP (°C) | FREQUENCY (Hz) | Freq. Dev. (Hz) | Deviation (%) |
|----------------|-------------|------------|----------------|-----------------|---------------|
| 100 % | 3.85 | + 20 (Ref) | 818,999,820 | -180 | -0.0000220 |
| 100 % | | - 30 | 819,000,266 | 266 | 0.0000325 |
| 100 % | | - 20 | 818,999,672 | -328 | -0.0000400 |
| 100 % | | - 10 | 819,000,186 | 186 | 0.0000227 |
| 100 % | | 0 | 818,999,966 | -34 | -0.0000042 |
| 100 % | | + 10 | 819,000,056 | 56 | 0.0000068 |
| 100 % | | + 20 | 819,000,250 | 250 | 0.0000305 |
| 100 % | | + 30 | 818,999,973 | -27 | -0.0000033 |
| 100 % | | + 40 | 819,000,400 | 400 | 0.0000488 |
| 100 % | | + 50 | 819,000,138 | 138 | 0.0000168 |
| BATT. ENDPOINT | 3.45 | + 20 | 818,999,955 | -45 | -0.0000055 |

Table 7-20. LTE Band 26 Frequency Stability Data (Ch. 26697)

| | | | | | |
|---|---|-------------------------------|---------------------------------------|---|---------------------------------|
| FCC ID: A3LSMN960U |  | | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 61 of 63 | |

Band 26 Frequency Stability / Temperature Variation
\$2.1055, \$90.213

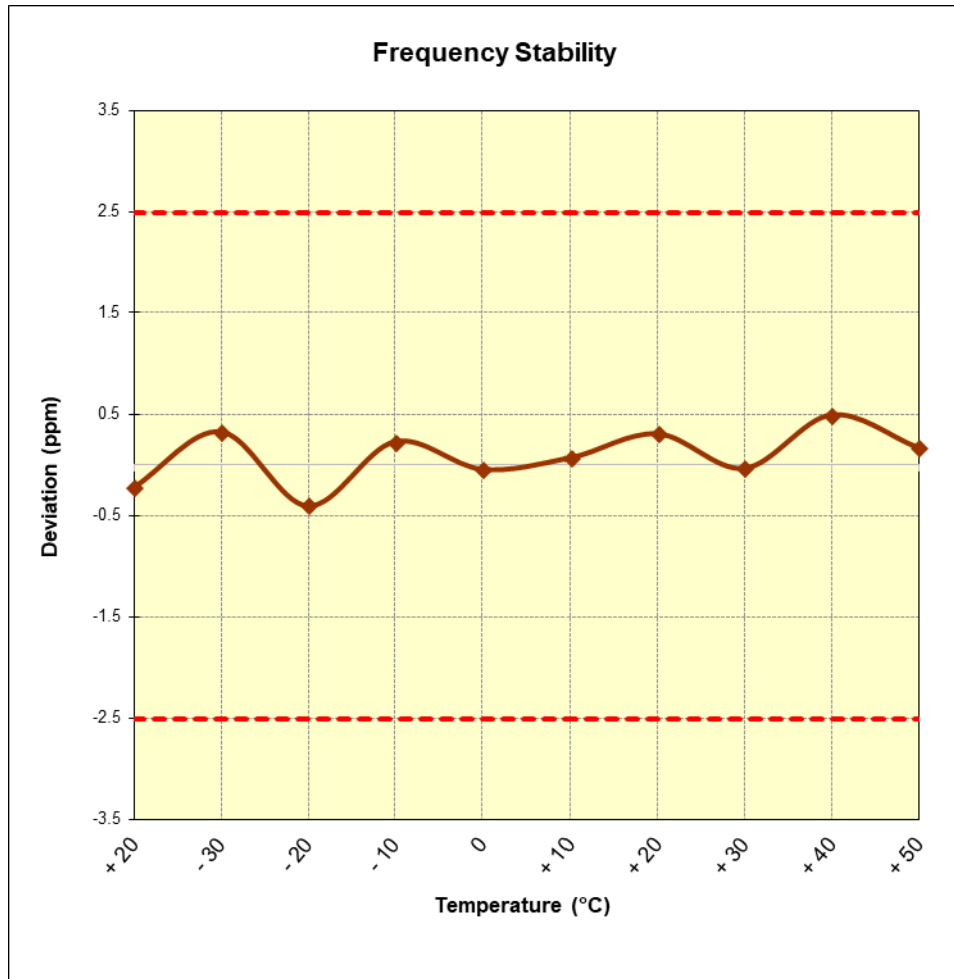


Table 7-21. LTE Band 26 Frequency Stability Data (Ch. 26697)

| | | | | |
|---|---|---------------------------------------|---|---------------------------------|
| FCC ID: A3LSMN960U |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | | Page 62 of 63 |

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMN960U** complies with all the requirements of Parts 22(H) and 90 of the FCC rules.

| | | | |
|---|---|-------------------------------|---------------------------------|
| FCC ID: A3LSMN960U |  MEASUREMENT REPORT (CERTIFICATION)  | | Approved by: Quality Manager |
| Test Report S/N: 1M1804270086-04.A3L | Test Dates: 4/30 - 6/13/2018 | EUT Type: Portable Handset | Page 63 of 63 |