



MID CHANNEL HORIZONTAL

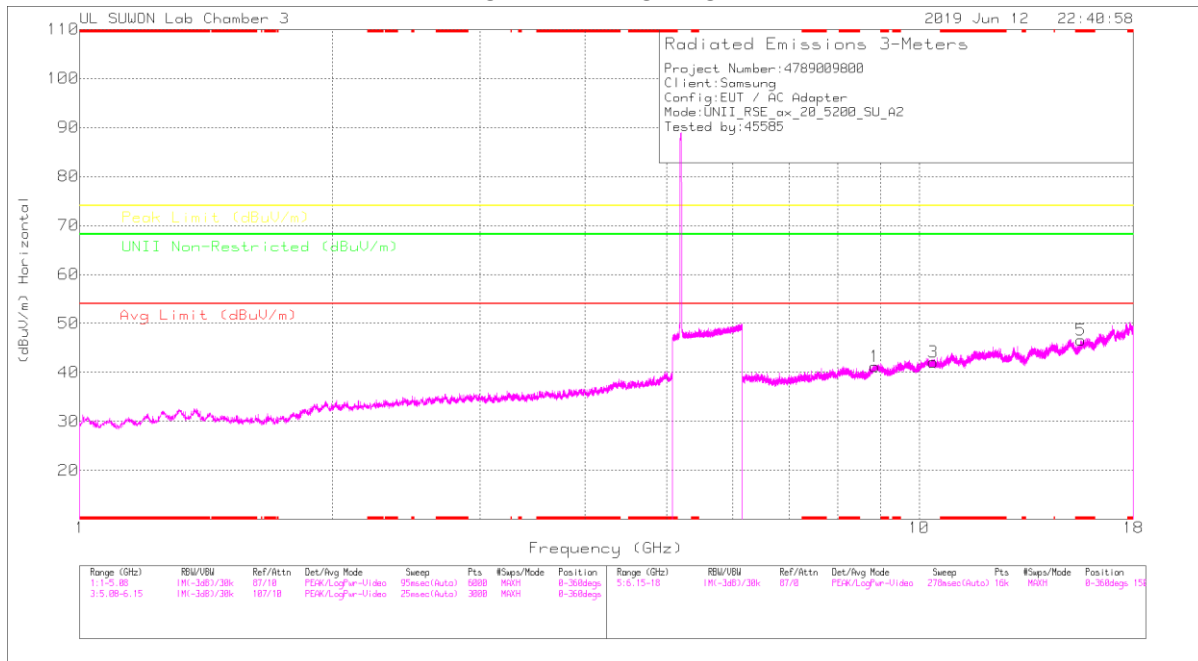

MID CHANNEL VERTICAL

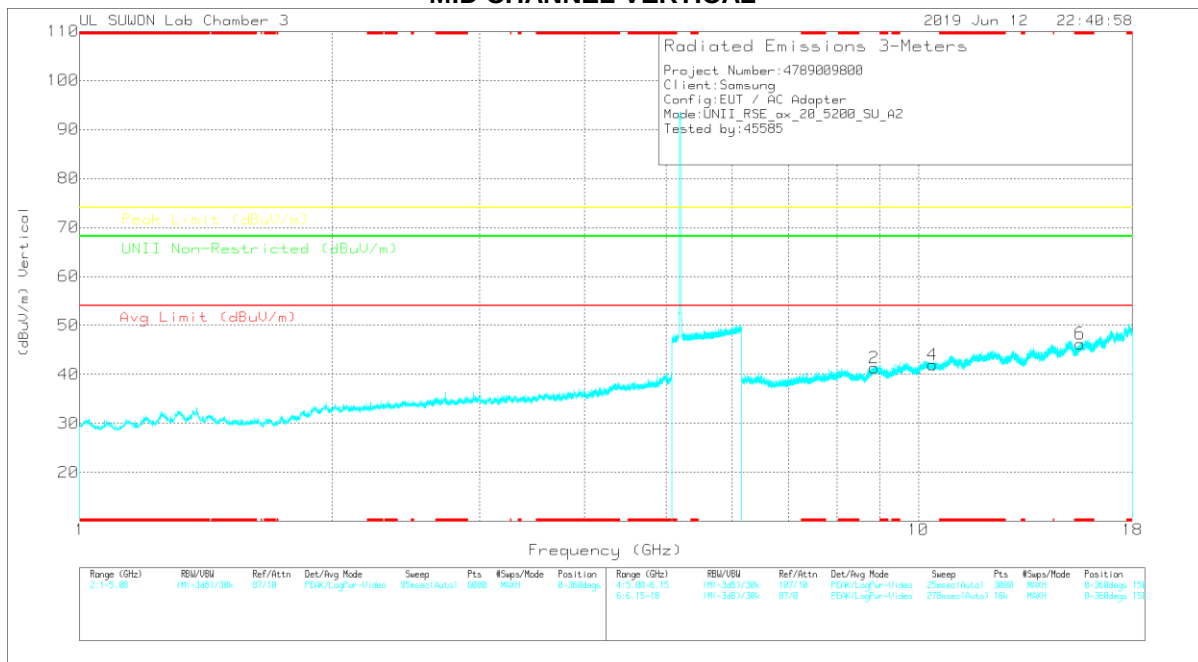

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unfil Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	8.852	25.5	PK	36.5	-20.8	0	41.2	-	-	-	-	68.2	-27	0-360	250	H
3	10.4	23.79	PK	37.6	-19.3	0	42.09	-	-	-	-	68.2	-26.11	0-360	250	H
5	* 15.593	25.96	PK	40.2	-19.6	0	46.56	-	-	74	-27.44	-	-	0-360	150	H
2	8.858	25.63	PK	36.5	-20.8	0	41.33	-	-	-	-	68.2	-26.87	0-360	250	V
4	10.402	23.65	PK	37.6	-19.3	0	41.95	-	-	-	-	68.2	-26.25	0-360	150	V
6	* 15.599	25.55	PK	40.2	-19.5	0	46.25	-	-	74	-27.75	-	-	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

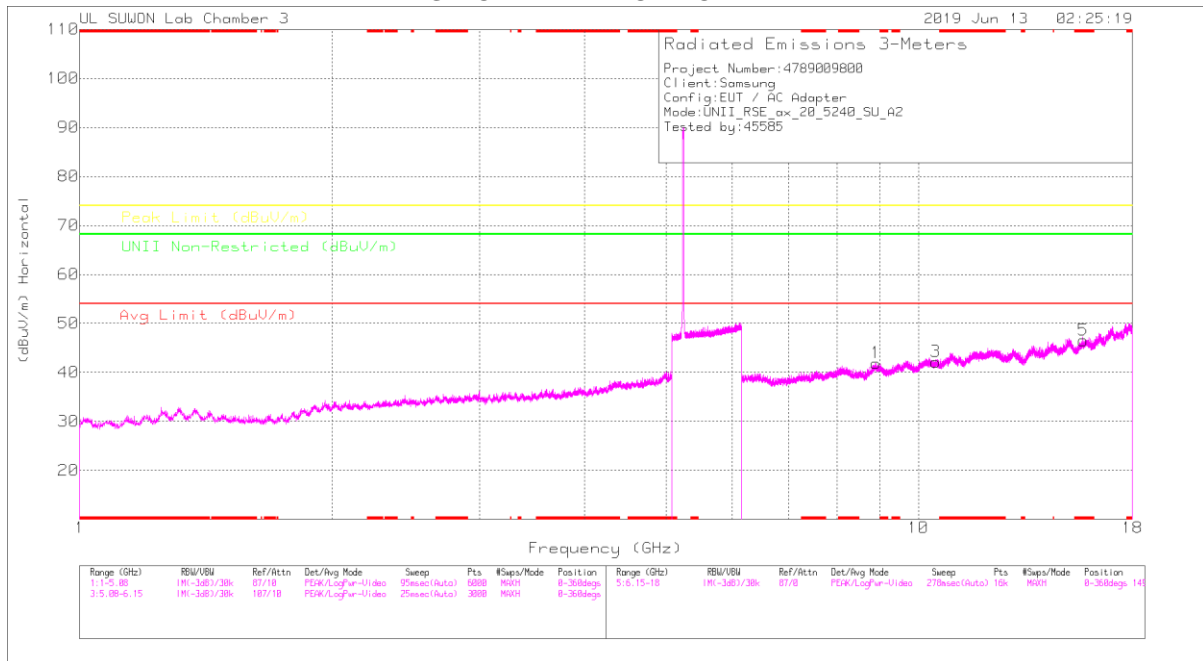

HIGH CHANNEL VERTICAL

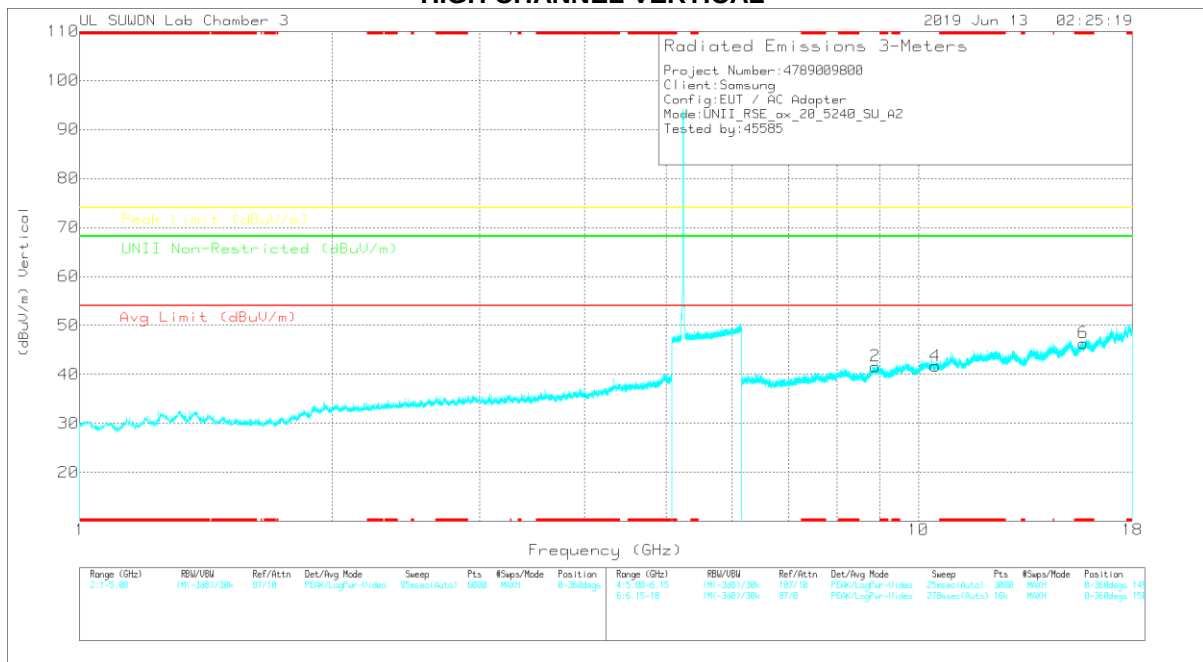

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	8.898	26.31	Avg	36.5	-20.9	0	41.91	-	-	-	-	68.2	-26.29	0-360	250	H
3	10.484	23.76	Avg	37.7	-19.3	0	42.16	-	-	-	-	68.2	-26.04	0-360	250	H
5	* 15.72	25.33	Avg	40.4	-19.2	0	46.53	-	-	74	-27.47	-	-	0-360	149	H
2	8.89	26.05	Avg	36.5	-20.9	0	41.65	-	-	-	-	68.2	-26.55	0-360	250	V
4	10.477	23.3	Avg	37.7	-19.3	0	41.7	-	-	-	-	68.2	-26.5	0-360	250	V
6	* 15.718	25.09	Avg	40.4	-19.1	0	46.39	-	-	74	-27.61	-	-	0-360	150	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HE40 SU mode (ANT_1)

LOW CHANNEL HORIZONTAL

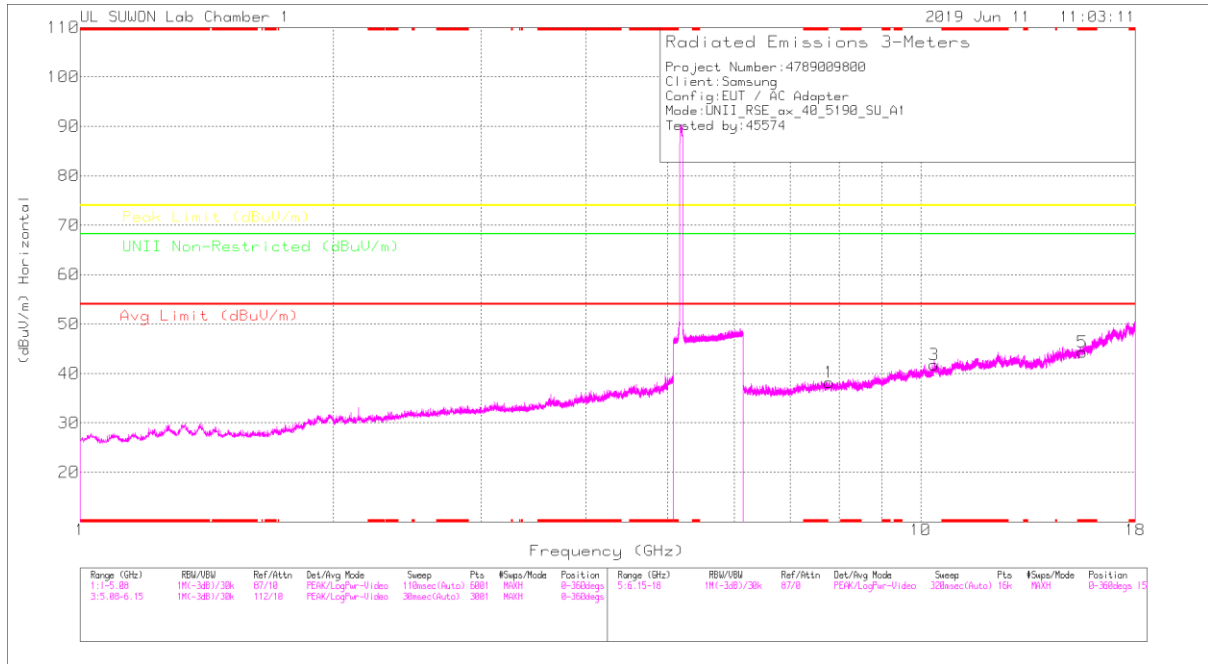

LOW CHANNEL VERTICAL

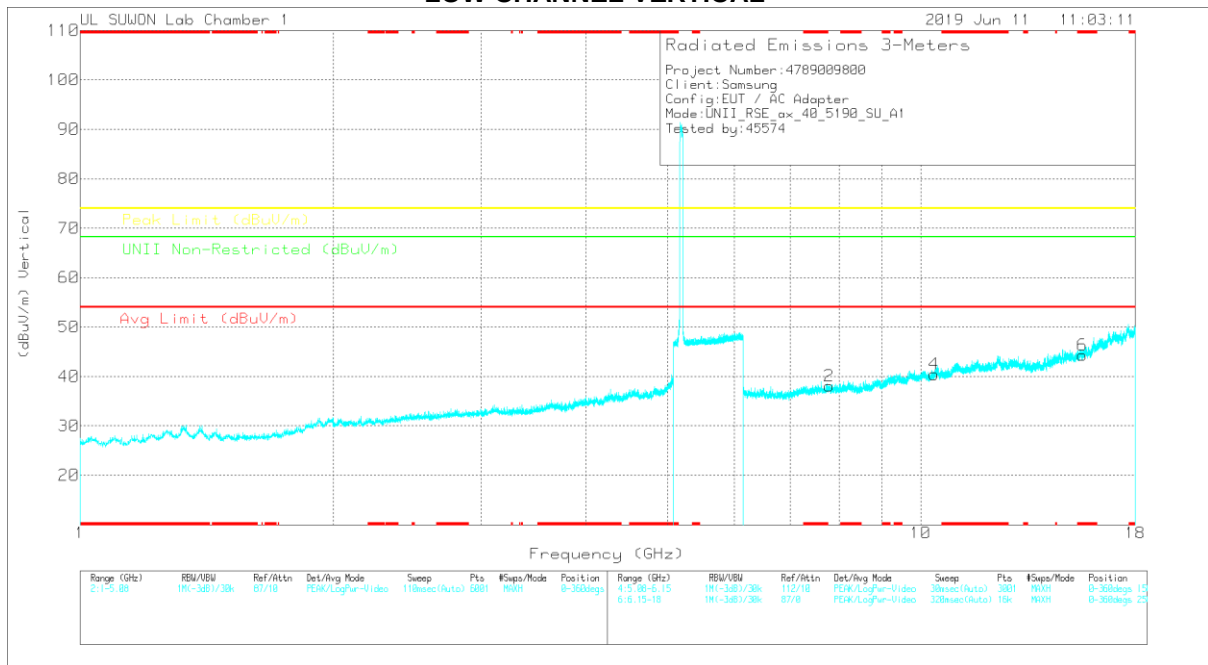

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HRP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.7852	28.8	PK	35.9	-26.5	0	38.2	-	-	-	-	68.2	-30	0-360	250	H
3	10.38093	26.24	PK	37.6	-22.1	0	41.74	-	-	-	-	68.2	-26.46	0-360	250	H
5	* 15.57091	25.18	PK	40.2	-21.1	0	44.28	-	-	74	-29.72	-	-	0-360	150	H
2	7.7852	28.64	PK	35.9	-26.5	0	38.04	-	-	-	-	68.2	-30.16	0-360	150	V
4	10.38093	24.95	PK	37.6	-22.1	0	40.45	-	-	-	-	68.2	-27.75	0-360	250	V
6	* 15.57091	25.21	PK	40.2	-21.1	0	44.31	-	-	74	-29.69	-	-	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

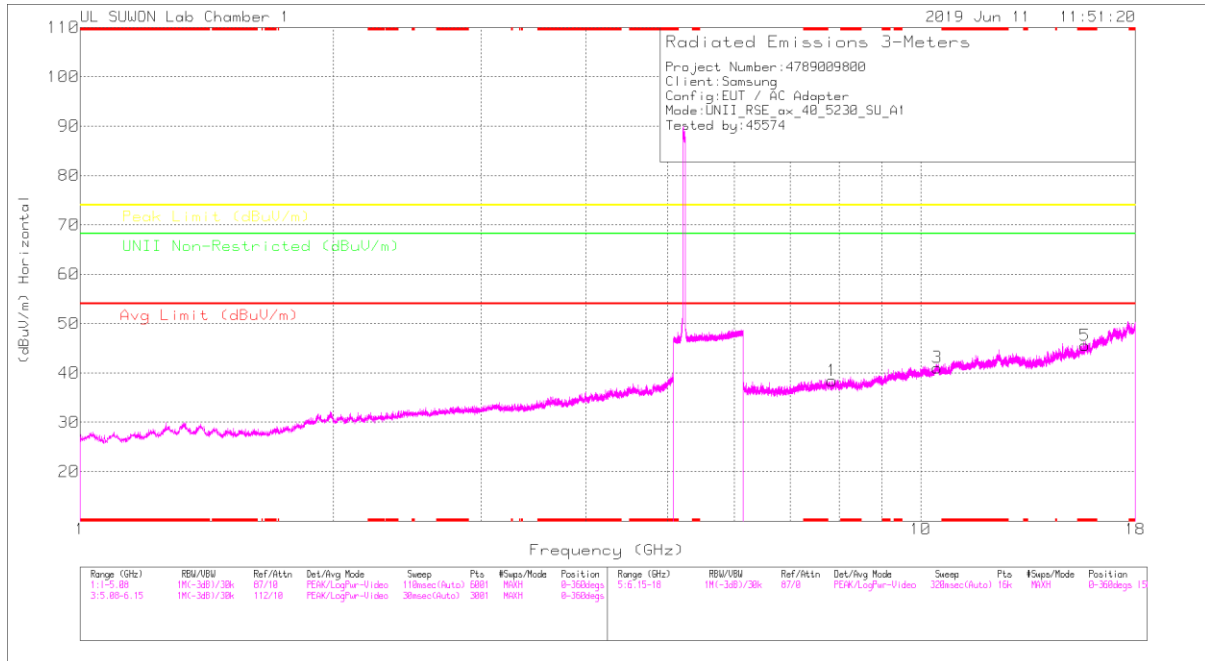

HIGH CHANNEL VERTICAL

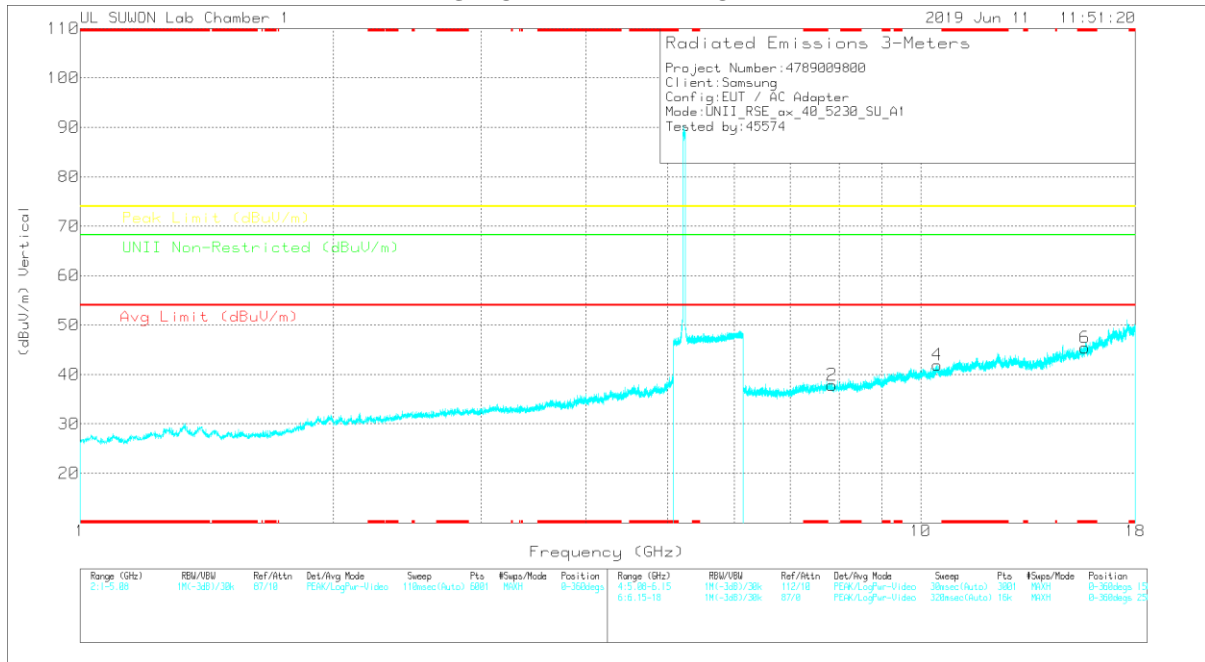

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00108717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.8437	29.24	PK	35.9	-26.7	0	38.44	-	-	-	-	68.2	-29.76	0-360	250	H
3	10.46017	24.96	PK	37.7	-21.6	0	41.06	-	-	-	-	68.2	-27.14	0-360	150	H
5	* 15.69014	26.19	PK	40.4	-21	0	45.59	-	-	74	-28.41	-	-	0-360	150	H
2	7.8437	28.65	PK	35.9	-26.7	0	37.85	-	-	-	-	68.2	-30.35	0-360	250	V
4	10.45943	25.94	PK	37.7	-21.7	0	41.94	-	-	-	-	68.2	-26.26	0-360	250	V
6	* 15.69088	26.01	PK	40.4	-21	0	45.41	-	-	74	-28.59	-	-	0-360	150	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HE40 SU mode (ANT_2)

LOW CHANNEL HORIZONTAL

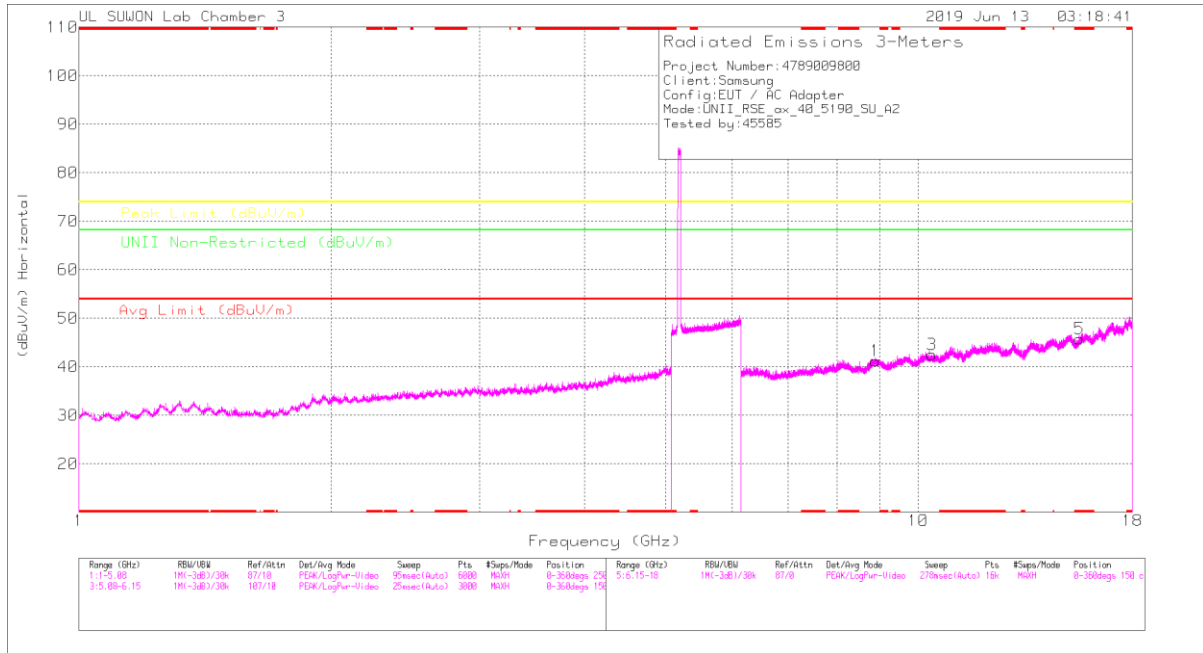

LOW CHANNEL VERTICAL

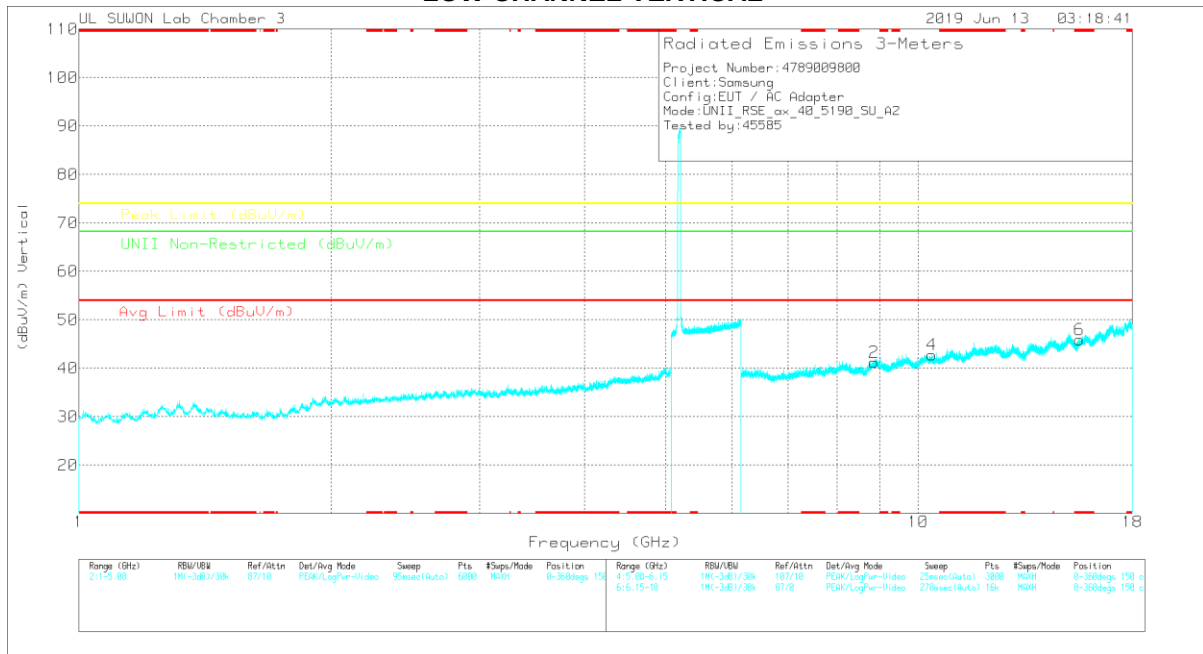

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	8.89	25.66	PK	36.5	-20.9	0	41.26	-	-	-	-	68.2	-26.94	0-360	250	H
3	10.384	24.06	PK	37.6	-19.2	0	42.46	-	-	-	-	68.2	-25.74	0-360	250	H
5	* 15.565	25.23	PK	40.2	-19.7	0	45.73	-	-	74	-28.27	-	-	0-360	150	H
2	8.862	25.42	PK	36.5	-20.7	0	41.22	-	-	-	-	68.2	-26.98	0-360	250	V
4	10.384	24.32	PK	37.6	-19.2	0	42.72	-	-	-	-	68.2	-25.48	0-360	250	V
6	* 15.567	25.39	PK	40.2	-19.7	0	45.89	-	-	74	-28.11	-	-	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

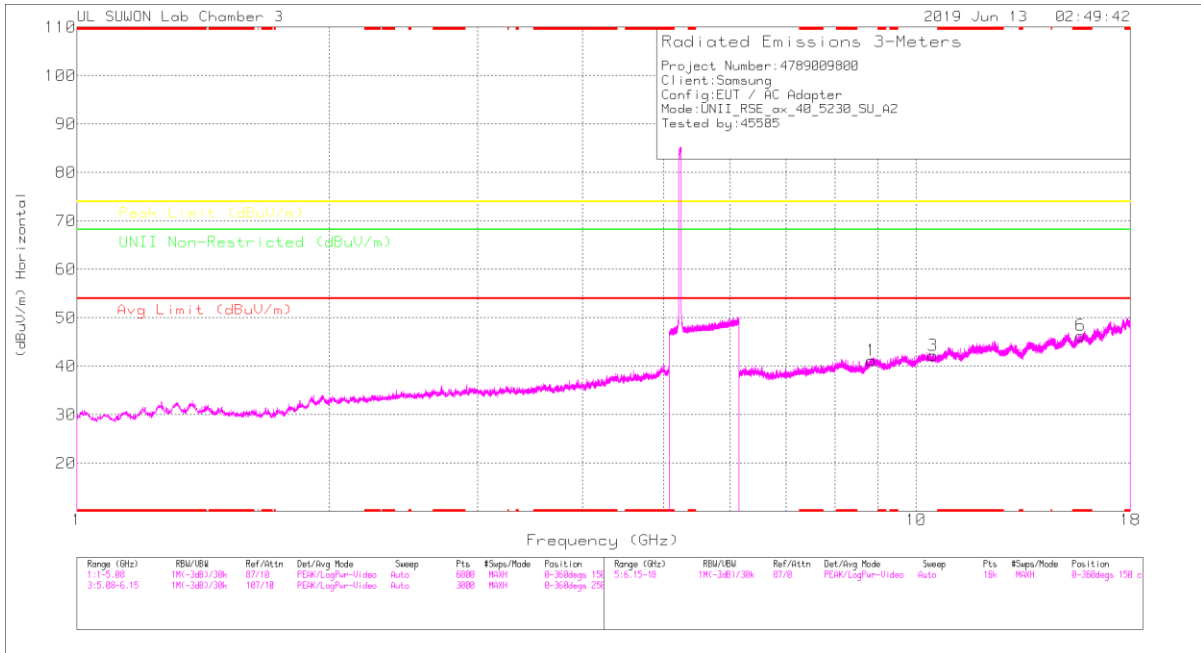

HIGH CHANNEL VERTICAL

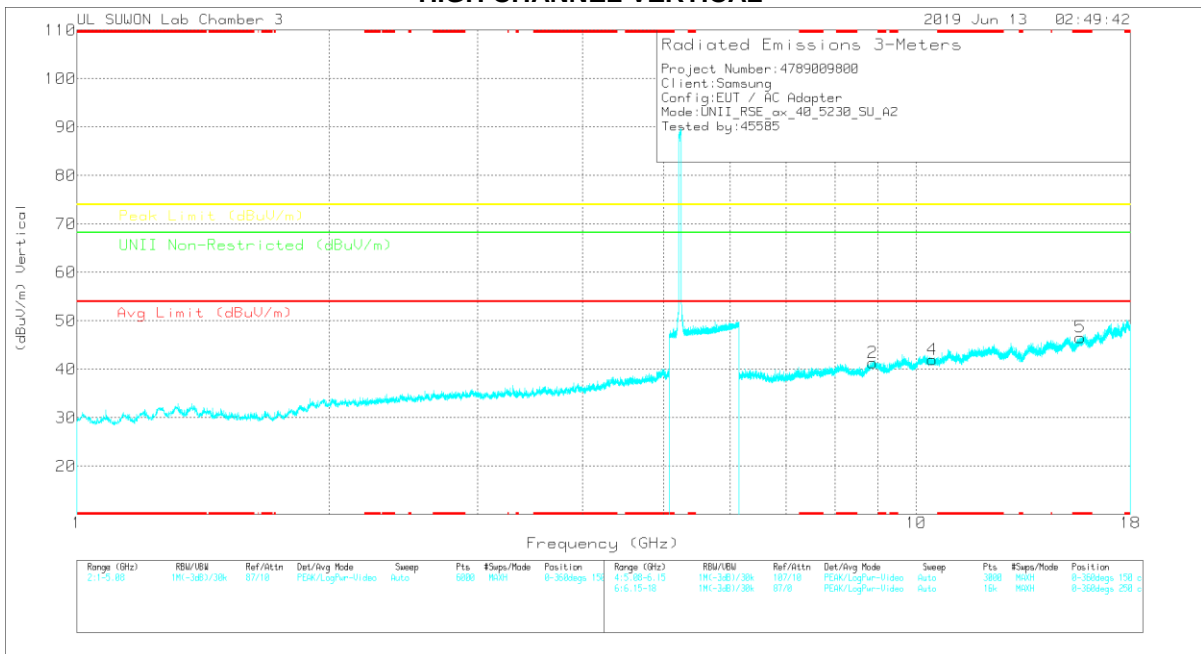

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	8.843	25.56	PK	36.5	-20.8	0	41.26	-	-	-	-	68.2	-26.94	0-360	250	H
3	10.467	23.97	PK	37.7	-19.4	0	42.27	-	-	-	-	68.2	-25.93	0-360	150	H
6	* 15.693	25.35	PK	40.4	-19.4	0	46.35	-	-	74	-27.65	-	-	0-360	250	H
2	8.875	25.79	PK	36.5	-20.9	0	41.39	-	-	-	-	68.2	-26.81	0-360	150	V
4	10.46	23.55	PK	37.7	-19.3	0	41.95	-	-	-	-	68.2	-26.25	0-360	150	V
5	* 15.685	25.61	PK	40.3	-19.3	0	46.61	-	-	74	-27.39	-	-	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HE80 SU mode (ANT_1)

MID CHANNEL HORIZONTAL

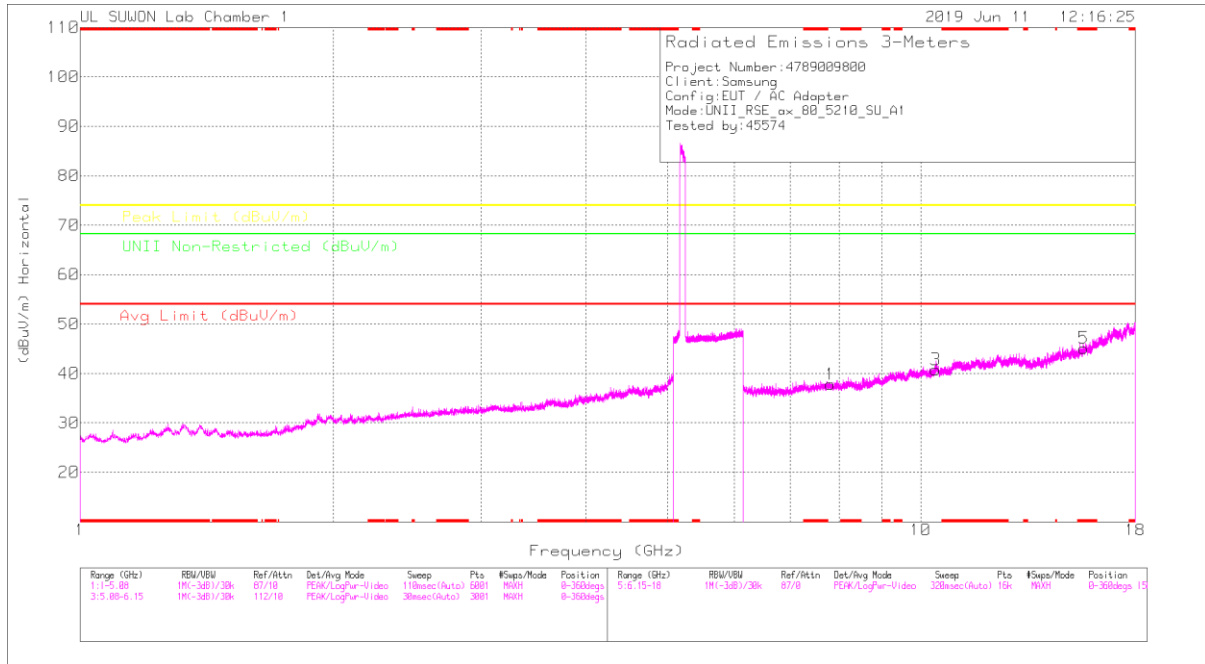

MID CHANNEL VERTICAL

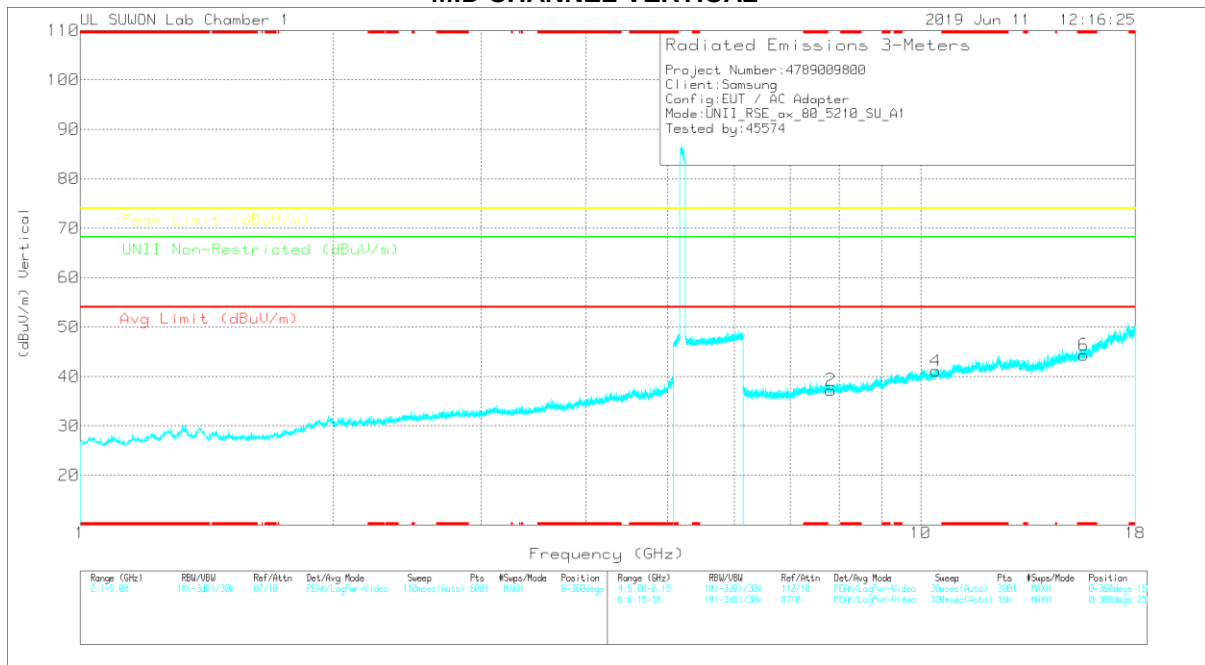

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HRP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.81408	28.51	PK	35.9	-26.6	0	37.81	-	-	-	-	68.2	-30.39	0-360	250	H
3	10.42092	24.66	PK	37.6	-21.5	0	40.76	-	-	-	-	68.2	-27.44	0-360	250	H
5	* 15.63237	26.1	PK	40.3	-21.3	0	45.1	-	-	74	-28.9	-	-	0-360	250	H
2	7.81556	27.91	PK	35.9	-26.6	0	37.21	-	-	-	-	68.2	-30.99	0-360	150	V
4	10.42018	25.02	PK	37.6	-21.5	0	41.12	-	-	-	-	68.2	-27.08	0-360	250	V
6	* 15.63237	25.33	PK	40.3	-21.3	0	44.33	-	-	74	-29.67	-	-	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HE80 SU mode (ANT_2)

MID CHANNEL HORIZONTAL

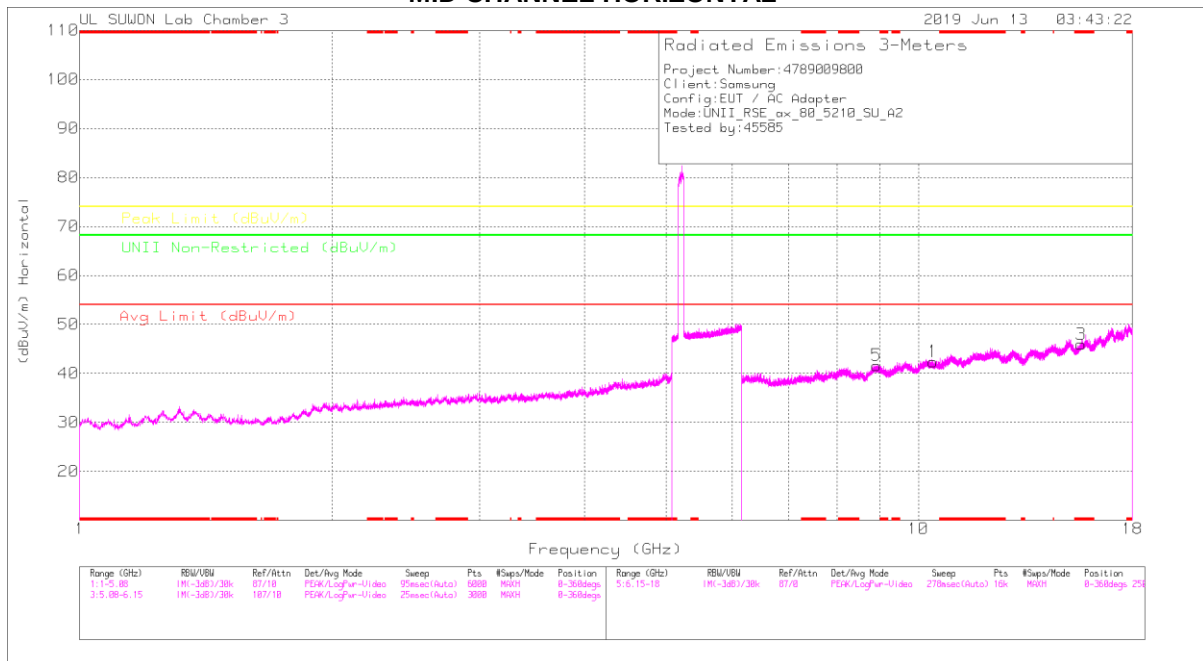

MID CHANNEL VERTICAL

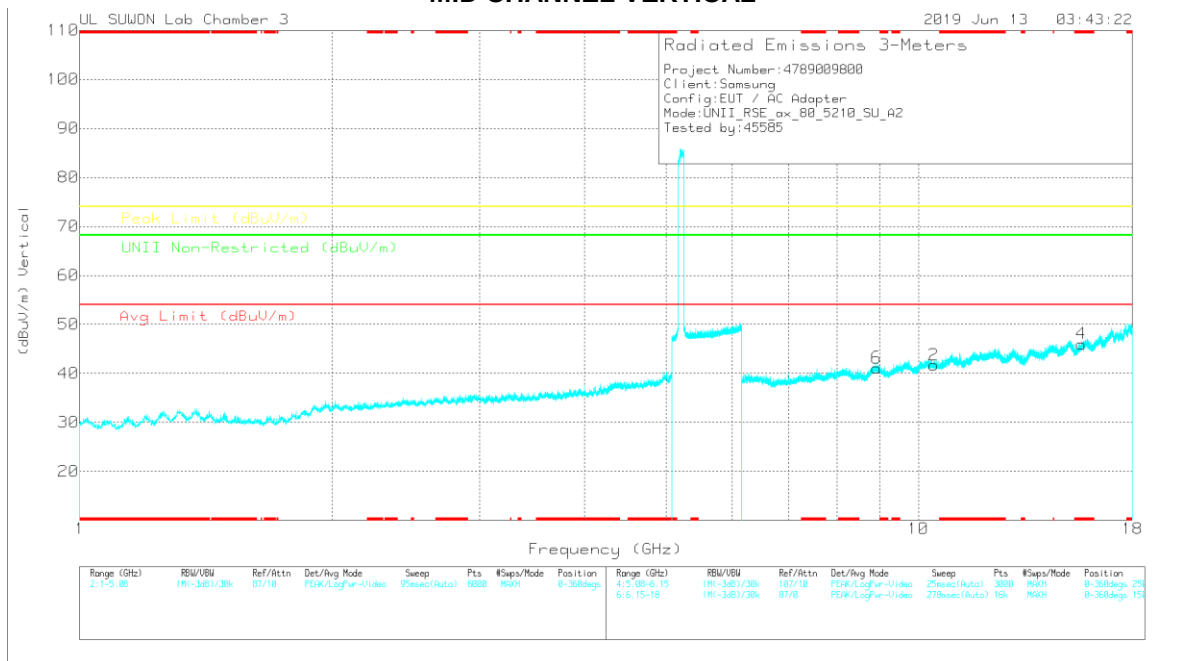

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	10.416	24.19	PK	37.6	-19.4	0	42.39	-	-	-	-	68.2	-25.81	0-360	250	H
3	* 15.628	25.03	PK	40.3	-19.4	0	45.93	-	-	74	-28.07	-	-	0-360	150	H
5	8.914	26.03	PK	36.6	-21	0	41.63	-	-	-	-	68.2	-26.57	0-360	250	H
2	10.424	23.42	PK	37.6	-19.3	0	41.72	-	-	-	-	68.2	-26.48	0-360	250	V
4	* 15.637	25.11	PK	40.3	-19.4	0	46.01	-	-	74	-27.99	-	-	0-360	250	V
6	8.91	25.51	PK	36.6	-21	0	41.11	-	-	-	-	68.2	-27.09	0-360	150	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HE20 RU mode (ANT_1 / 26T / Low: 8, Mid: 4, High: 4)

LOW CHANNEL HORIZONTAL

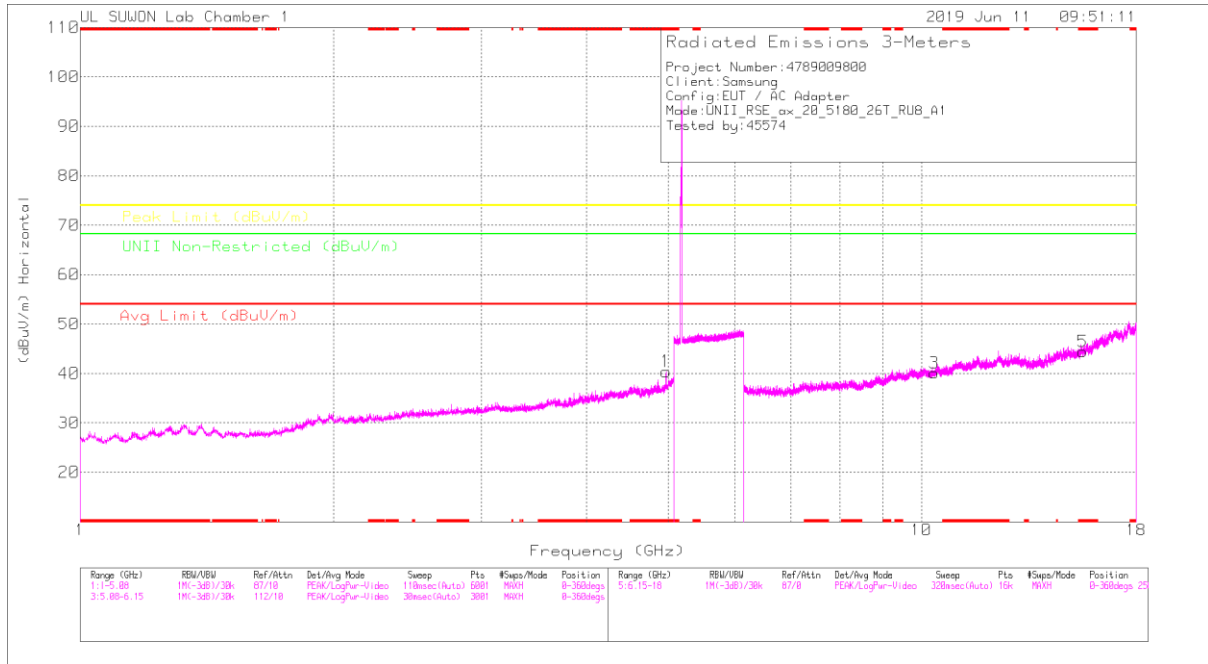

LOW CHANNEL VERTICAL

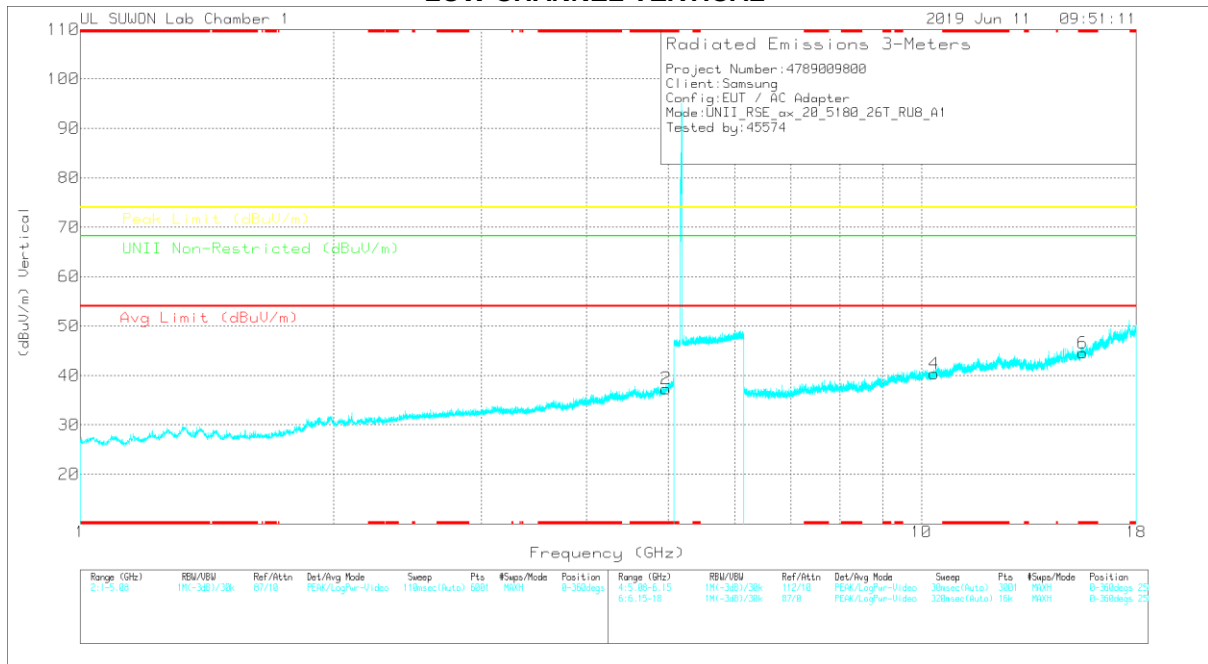

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	5GHz_LP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unli Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.97052	38.2	Avg	34.2	-30	0	-40.4	-	-	74	-33.6	-	-	0-360	250	H
2	* 4.9712	33.16	Avg	34.2	-30	0	-37.36	-	-	74	-36.64	-	-	0-360	150	V
3	10.36019	34.77	Avg	37.6	-22.3	0	-40.07	-	-	-	-	68.2	-28.13	0-360	150	H
5	15.54054	25.04	Avg	40.2	-20.8	0	-44.44	-	-	74	-29.56	-	-	0-360	150	H
4	10.36053	25.05	Avg	37.6	-22.3	0	-40.35	-	-	-	-	68.2	-27.85	0-360	150	V
6	* 15.54054	25.14	Avg	40.2	-20.8	0	-44.54	-	-	74	-29.46	-	-	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

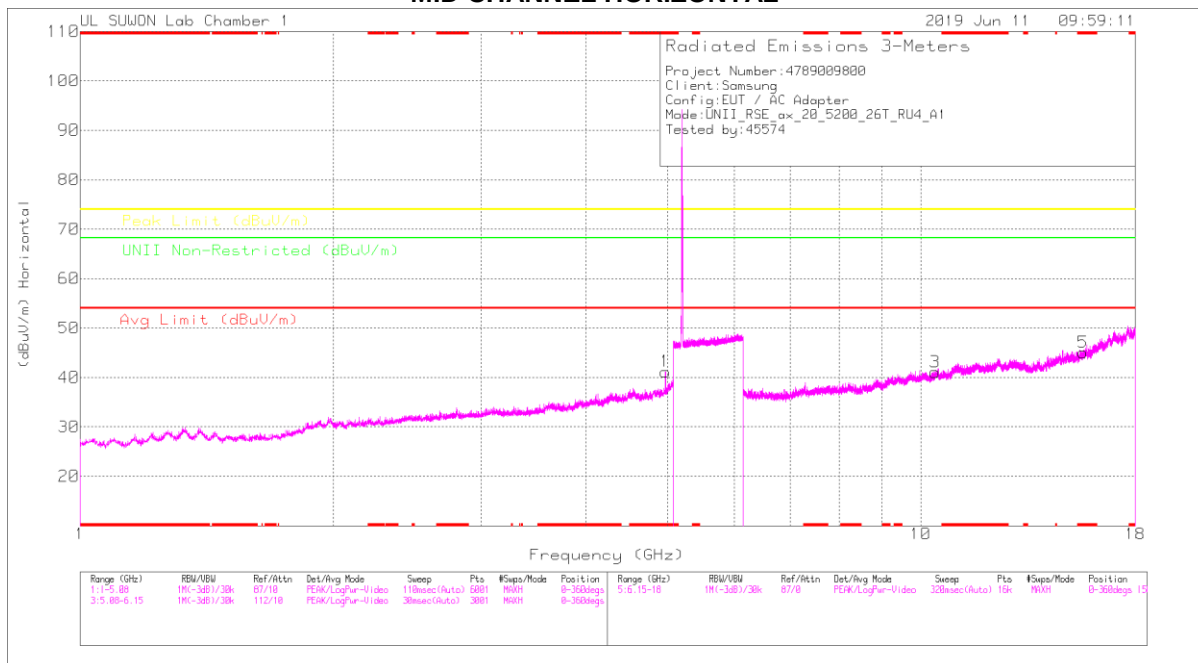

MID CHANNEL VERTICAL

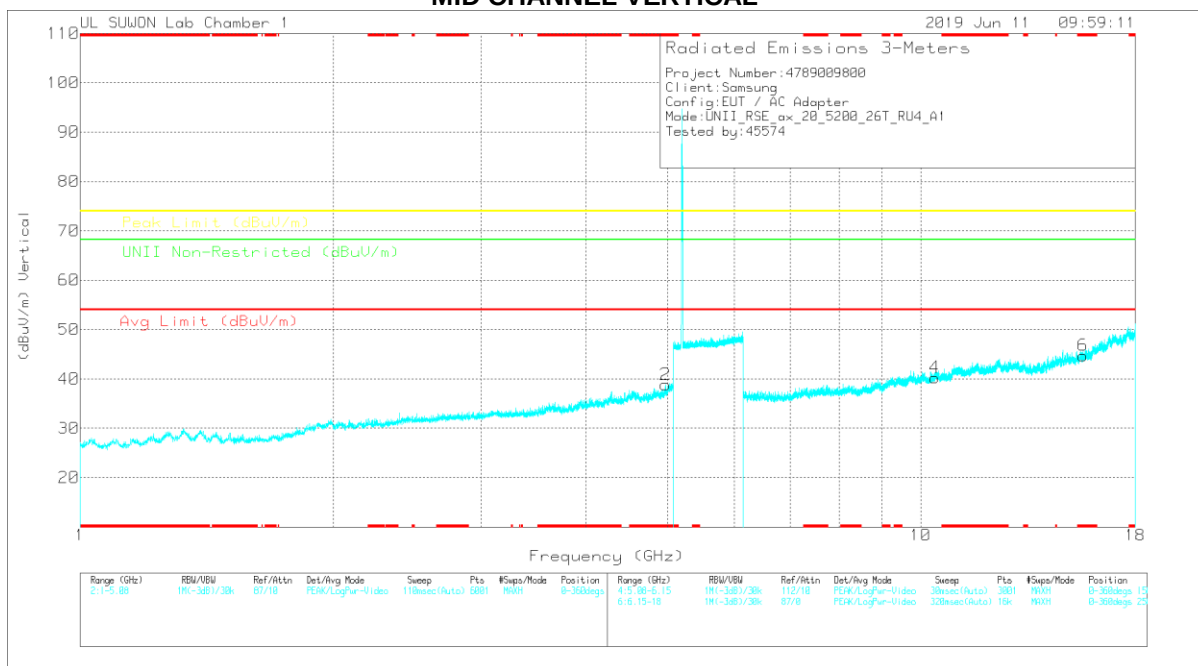

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	5GHz_LP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unli Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.97052	36.99	PK	34.2	-30	0	41.19	-	-	74	-32.81	-	-	0-360	250	H
2	* 4.97052	34.65	PK	34.2	-30	0	38.85	-	-	74	-35.15	-	-	0-360	150	V
3	10.40018	25.27	PK	37.6	-21.8	0	41.07	-	-	-	-	68.2	-27.13	0-360	150	H
5	* 15.59979	26.13	PK	40.2	-21.3	0	45.03	-	-	74	-28.97	-	-	0-360	250	H
4	10.39944	24.45	PK	37.6	-21.8	0	40.25	-	-	-	-	68.2	-27.95	0-360	150	V
6	* 15.59979	25.85	PK	40.2	-21.3	0	44.75	-	-	74	-29.25	-	-	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	5GHz_LP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unli Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.96981	45.55	PK-U	34.2	-30	0	49.75	-	-	74	-24.25	-	-	212	321	H
* 4.96987	32.62	ADR	34.2	-30	0	36.82	54	-17.18	-	-	-	-	212	321	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL HORIZONTAL

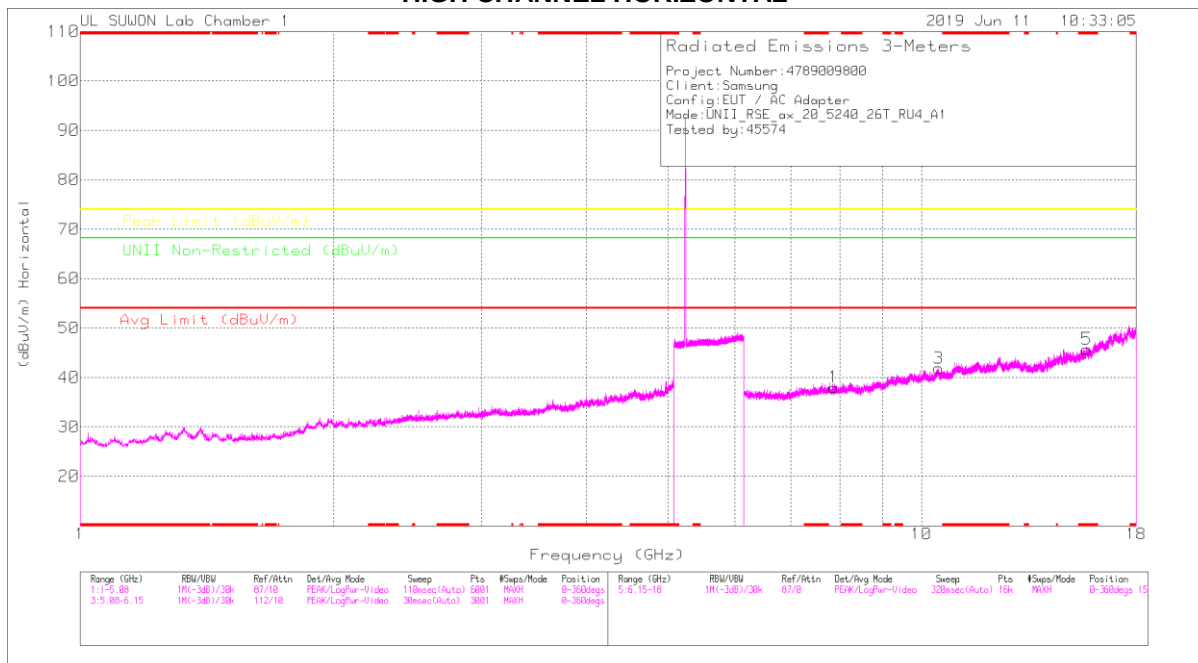

HIGH CHANNEL VERTICAL

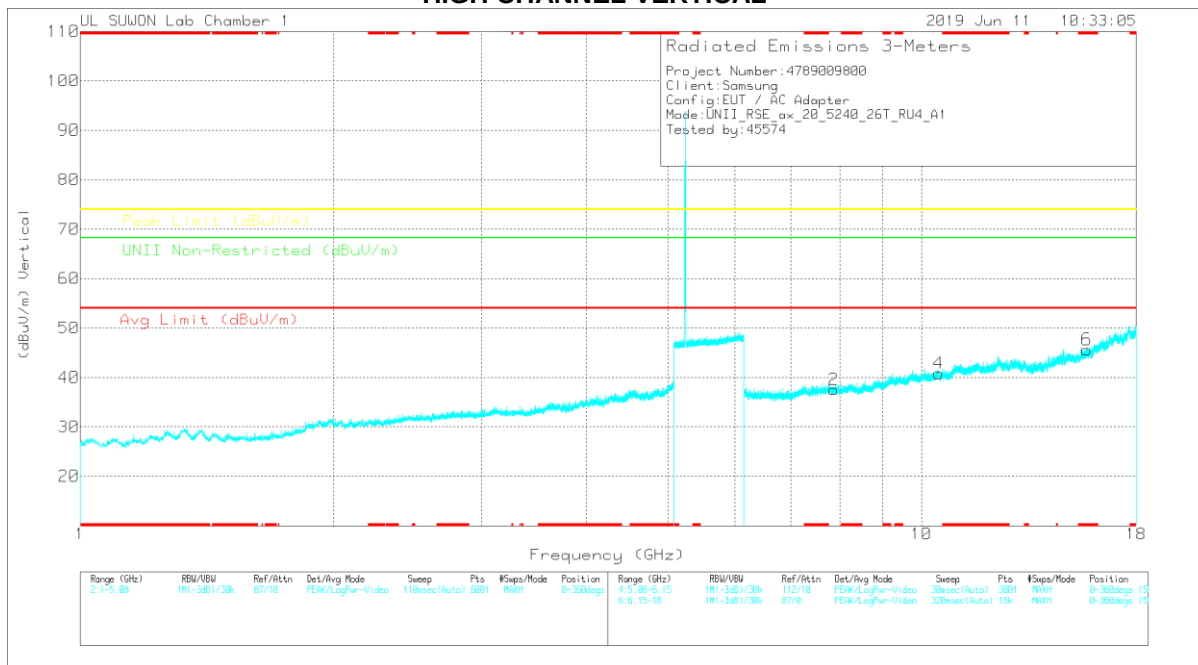

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	ULN Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.86222	28.7	PK	35.9	-26.6	0	39	-	-	-	-	68.2	-30.2	0-360	150	H
3	10.47868	25.96	PK	37.7	-21.8	0	41.86	-	-	-	-	68.2	-26.34	0-360	250	H
5	* 15.72198	26.42	PK	40.4	-21.1	0	45.72	-	-	74	-28.28	-	-	0-360	250	H
2	7.86148	28.36	PK	35.9	-26.7	0	37.56	-	-	-	-	68.2	-30.64	0-360	150	V
4	10.47868	24.93	PK	37.7	-21.8	0	40.83	-	-	-	-	68.2	-27.37	0-360	250	V
6	* 15.72198	26.31	PK	40.4	-21.1	0	45.61	-	-	74	-28.39	-	-	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HE20 RU mode (ANT_2 / 26T / Low: 4, Mid: 4, High: 4)

LOW CHANNEL HORIZONTAL

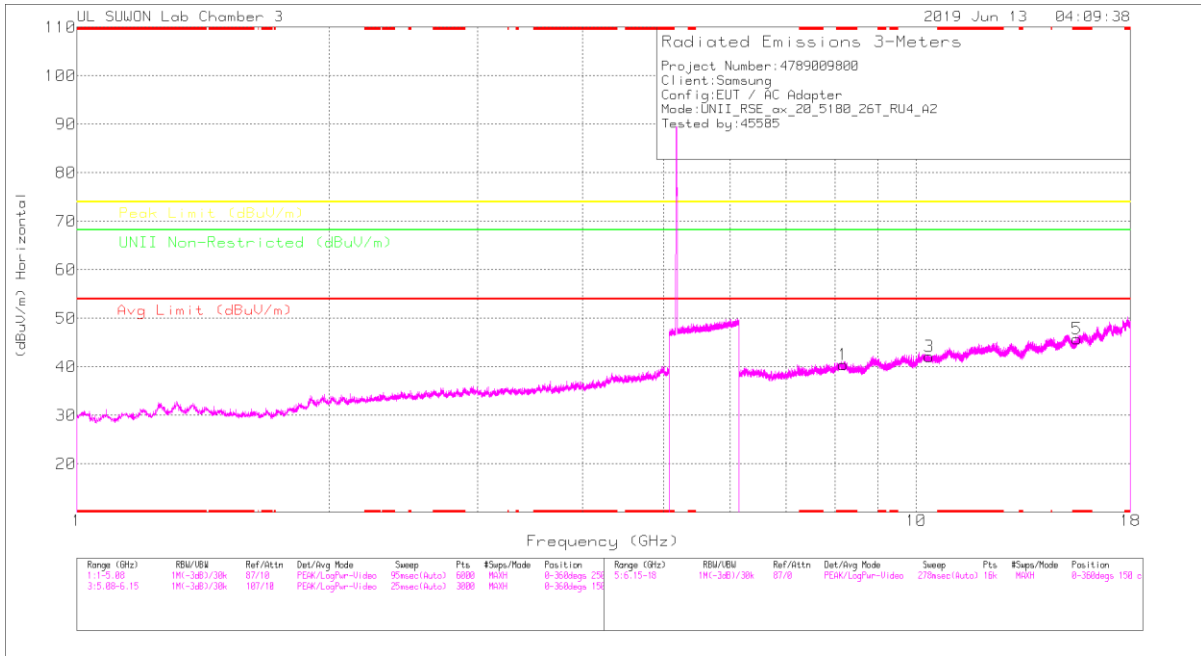

LOW CHANNEL VERTICAL

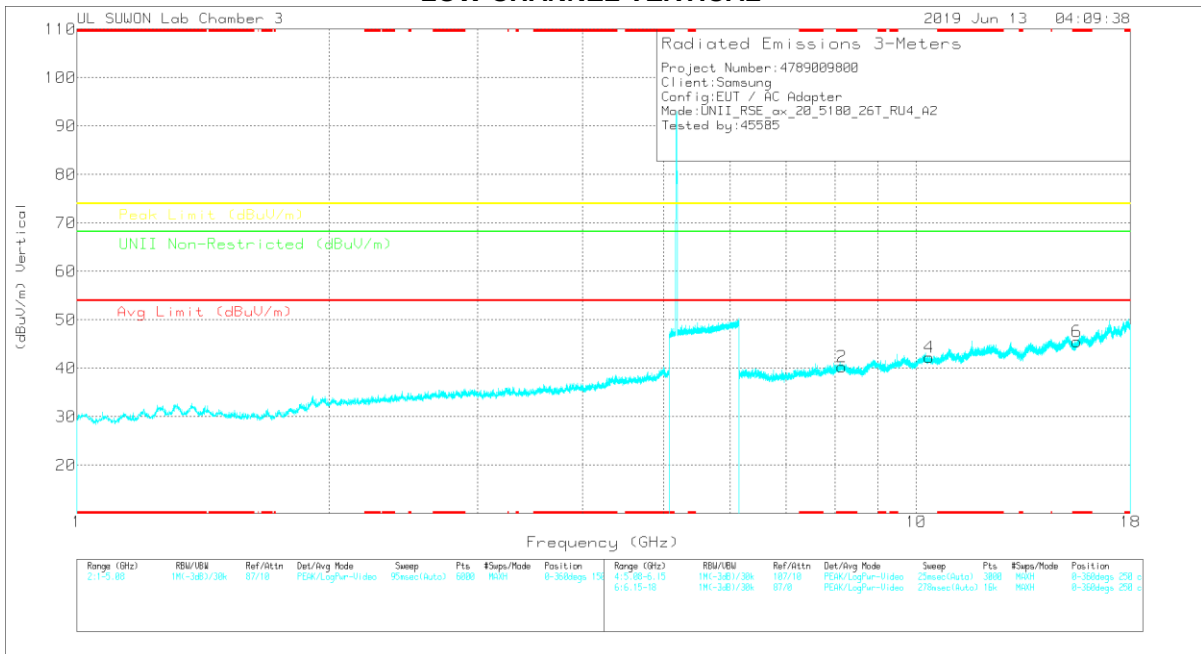

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 8.189	25.99	PK	36.3	-21.8	0	40.49	-	-	74	-33.51	-	-	0-360	150	H
3	10.366	23.72	PK	37.6	-19.2	0	42.12	-	-	-	-	68.2	-26.08	0-360	150	H
5	* 15.537	25.31	PK	40.2	-19.7	0	45.81	-	-	74	-28.19	-	-	0-360	150	H
2	* 8.154	25.69	PK	36.3	-21.7	0	40.29	-	-	74	-33.71	-	-	0-360	150	V
4	10.357	23.99	PK	37.6	-19.3	0	42.29	-	-	-	-	68.2	-25.91	0-360	150	V
6	* 15.537	24.98	PK	40.2	-19.7	0	45.48	-	-	74	-28.52	-	-	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

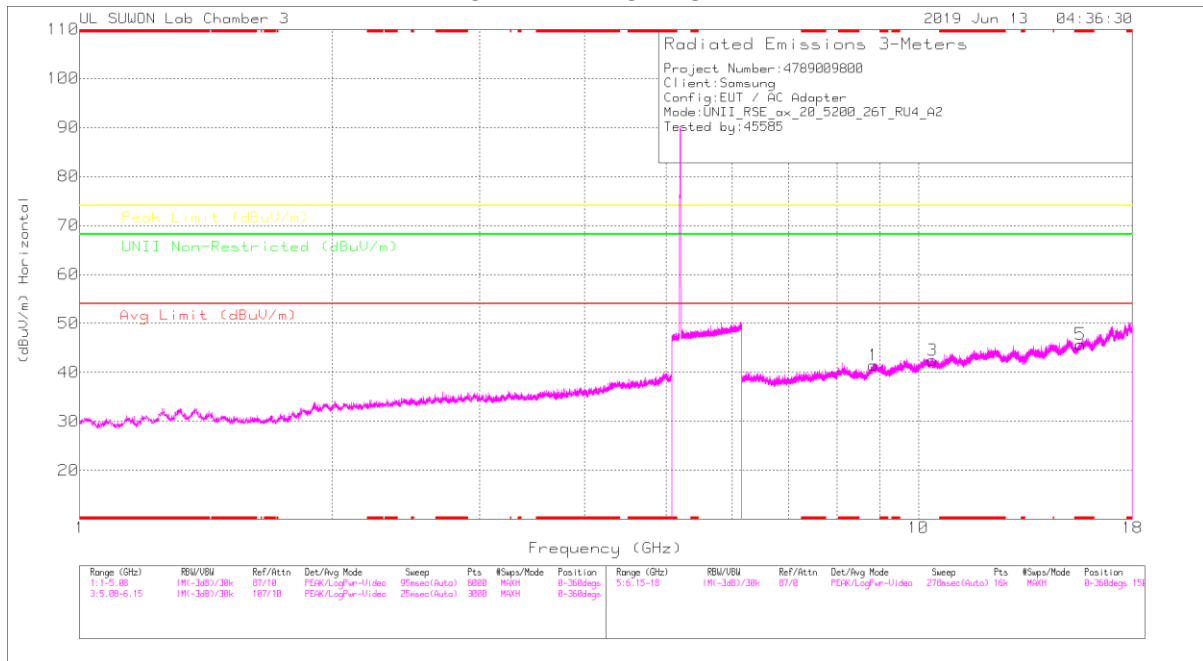

MID CHANNEL VERTICAL

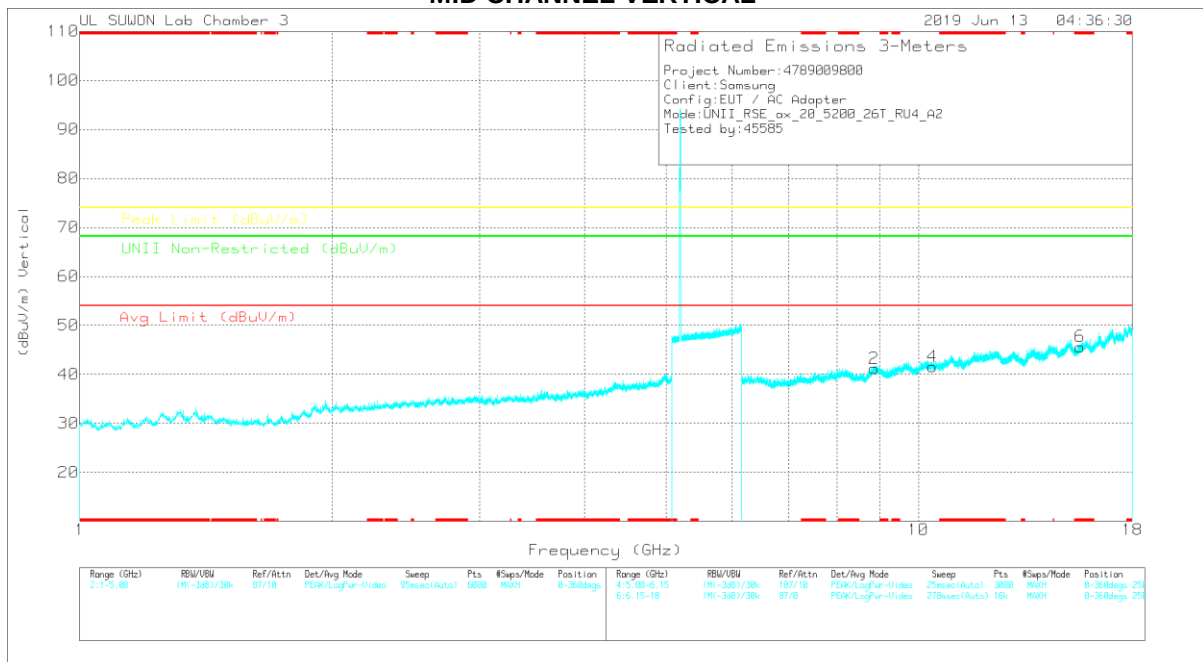

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	6GHz_HP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.028	26.35	PK	35.9	-25.2	0	37.05	-	-	-	-	68.2	-31.15	0-360	250	H
4	10.383	27.17	PK	37.6	-21	0	43.77	-	-	-	-	68.2	-24.43	0-360	150	H
5	* 15.6	24.54	PK	40	-19.8	0	44.74	-	-	74	-29.26	-	-	0-360	150	H
2	7.016	27.01	PK	35.8	-25.5	0	37.31	-	-	-	-	68.2	-30.89	0-360	250	V
3	10.383	25.84	PK	37.6	-21	0	42.44	-	-	-	-	68.2	-25.76	0-360	250	V
6	* 15.6	24.76	PK	40	-19.8	0	44.96	-	-	74	-29.04	-	-	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

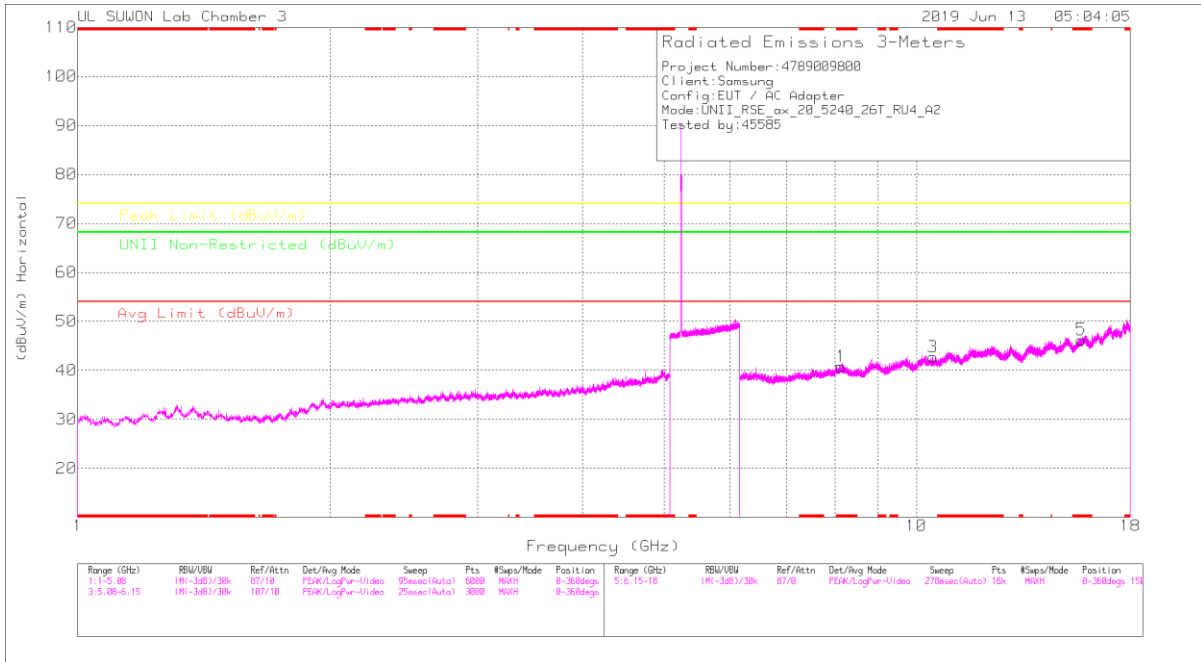

HIGH CHANNEL VERTICAL

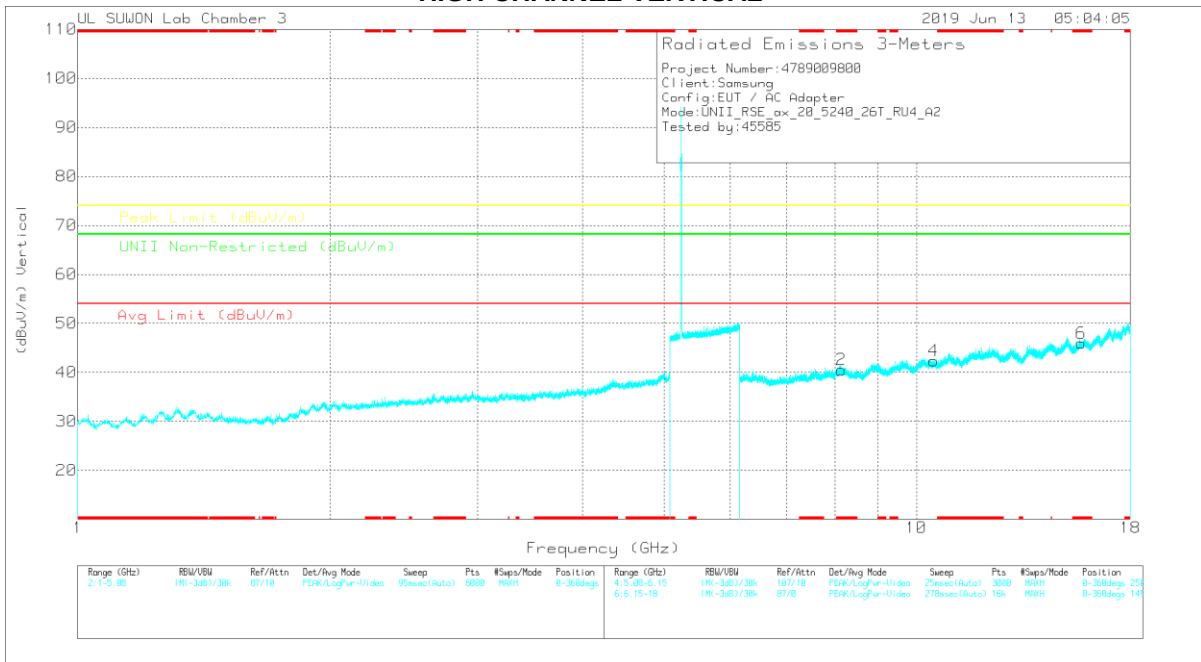

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 8.135	26.26	PK	36.3	-21.8	0	40.76	-	-	74	-33.24	-	-	0-360	250	H
3	10.473	24.31	PK	37.7	-19.3	0	42.71	-	-	-	-	68.2	-25.49	0-360	150	H
5	* 15.719	25.06	PK	40.4	-19.2	0	46.26	-	-	74	-27.74	-	-	0-360	150	H
2	* 8.136	26.01	PK	36.3	-21.8	0	40.51	-	-	74	-33.49	-	-	0-360	250	V
4	10.478	23.97	PK	37.7	-19.3	0	42.37	-	-	-	-	68.2	-25.83	0-360	250	V
6	* 15.717	24.65	PK	40.4	-19.1	0	45.95	-	-	74	-28.05	-	-	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HE40 RU mode (ANT_1 / 26T / Low: 9, High: 9)

LOW CHANNEL HORIZONTAL

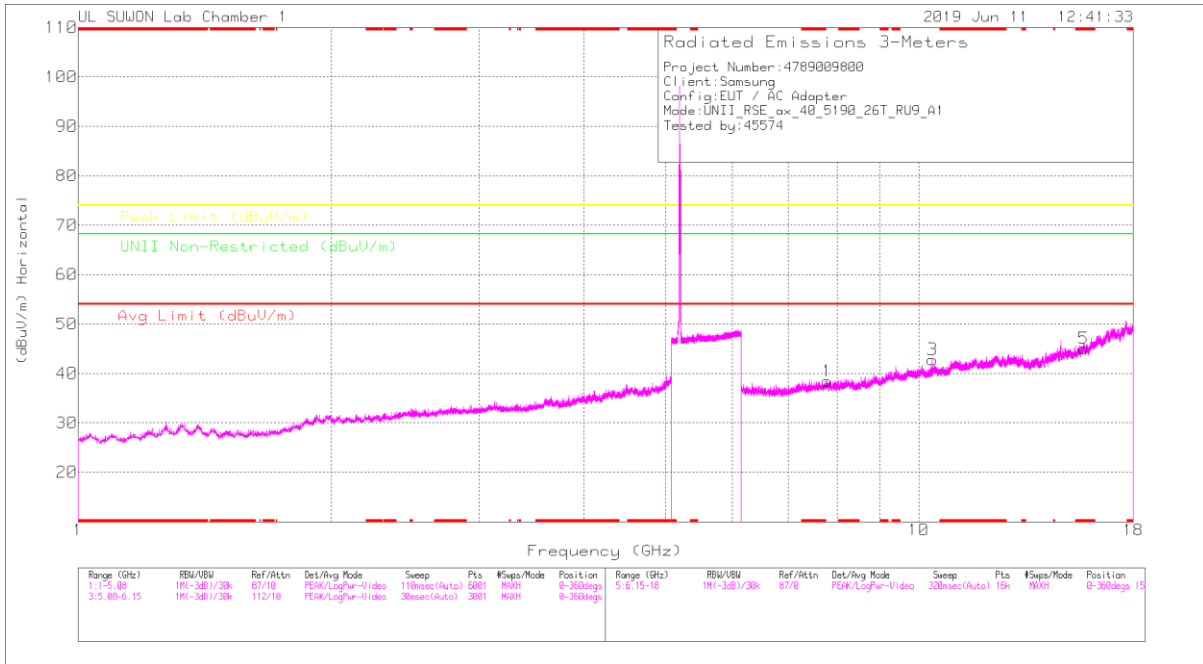

LOW CHANNEL VERTICAL

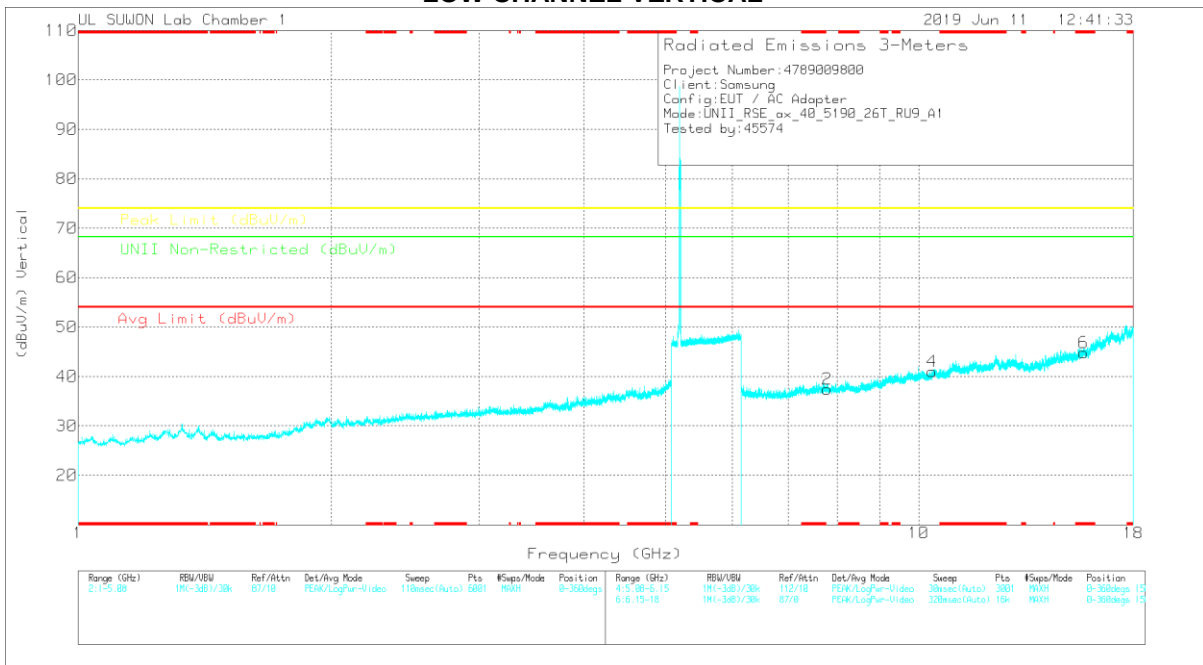

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.78594	29.02	PK	35.9	-26.5	0	38.42	-	-	-	-	68.2	-29.78	0-360	150	H
3	10.38241	27.3	PK	37.6	-22.1	0	42.8	-	-	-	-	68.2	-25.4	0-360	150	H
5	* 15.70125	25.65	PK	40.4	-21	0	45.05	-	-	74	-28.95	-	-	0-360	150	H
2	7.7852	28.03	PK	35.9	-26.5	0	37.43	-	-	-	-	68.2	-30.77	0-360	250	V
4	10.38167	25.46	PK	37.6	-22.1	0	40.96	-	-	-	-	68.2	-27.24	0-360	250	V
6	* 15.70051	25.4	PK	40.4	-21	0	44.8	-	-	74	-29.2	-	-	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

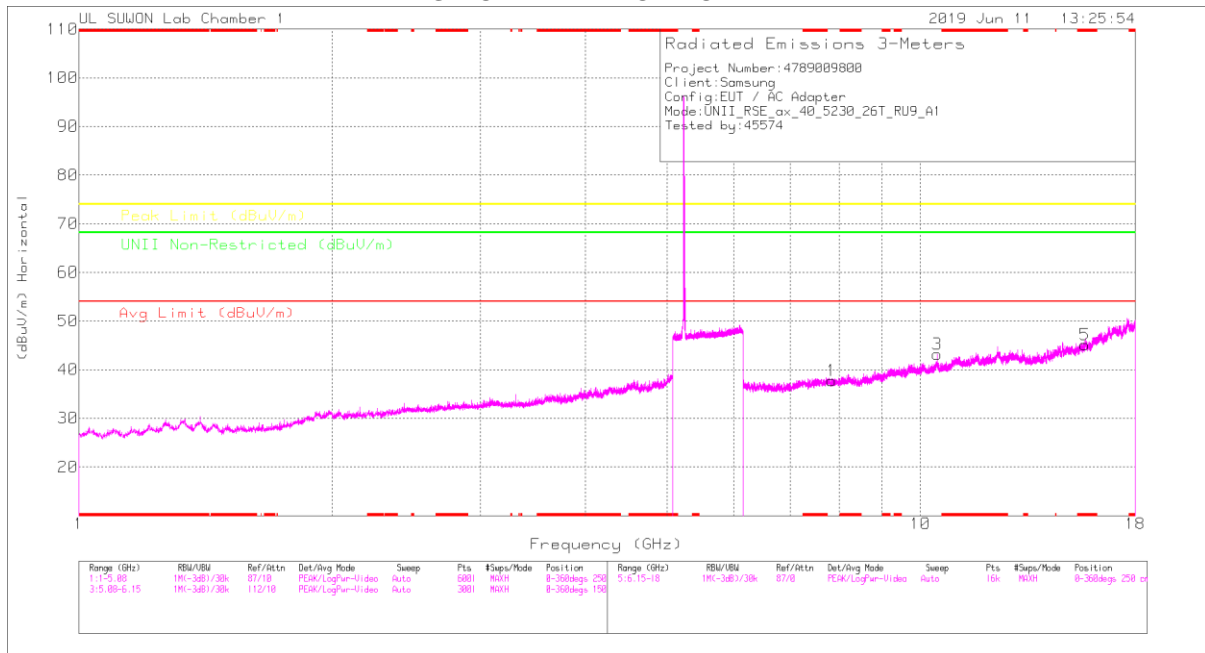

HIGH CHANNEL VERTICAL

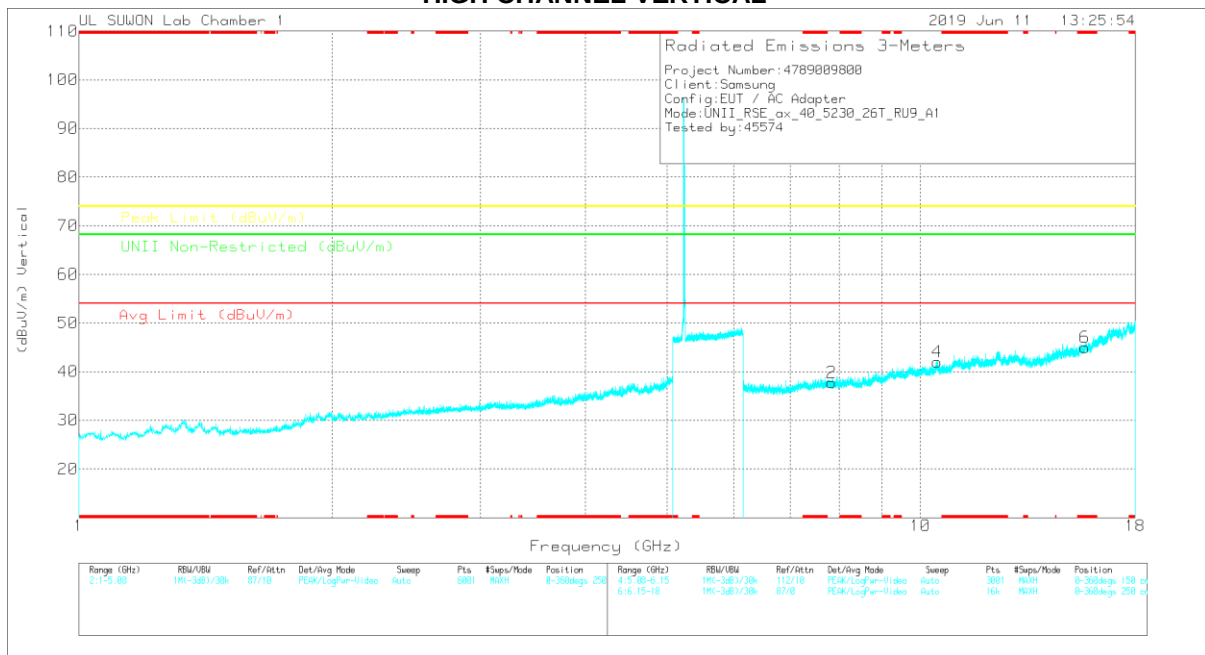

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unli Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.84519	28.53	PK	35.9	-26.7	0	37.73	-	-	-	-	68.2	-30.47	0-360	150	H
3	10.46239	27.12	PK	37.7	-21.6	0	43.22	-	-	-	-	68.2	-24.98	0-360	250	H
5	* 15.69014	25.7	PK	40.4	-21	0	45.1	-	-	74	-28.9	-	-	0-360	150	H
2	7.84593	28.53	PK	35.9	-26.7	0	37.73	-	-	-	-	68.2	-30.47	0-360	250	V
4	10.46165	25.92	PK	37.7	-21.6	0	42.02	-	-	-	-	68.2	-26.18	0-360	150	V
6	* 15.69014	25.53	PK	40.4	-21	0	44.93	-	-	74	-29.07	-	-	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unli Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
10.47202	35.09	PK-U	37.7	-21.7	0	51.09	-	-	-	-	68.2	-17.11	360	168	H
10.47583	34.97	PK-U	37.7	-21.8	0	50.87	-	-	-	-	68.2	-17.33	40	124	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

HE40 RU mode (ANT_2 / 26T / Low: 17, High: 17)

LOW CHANNEL HORIZONTAL

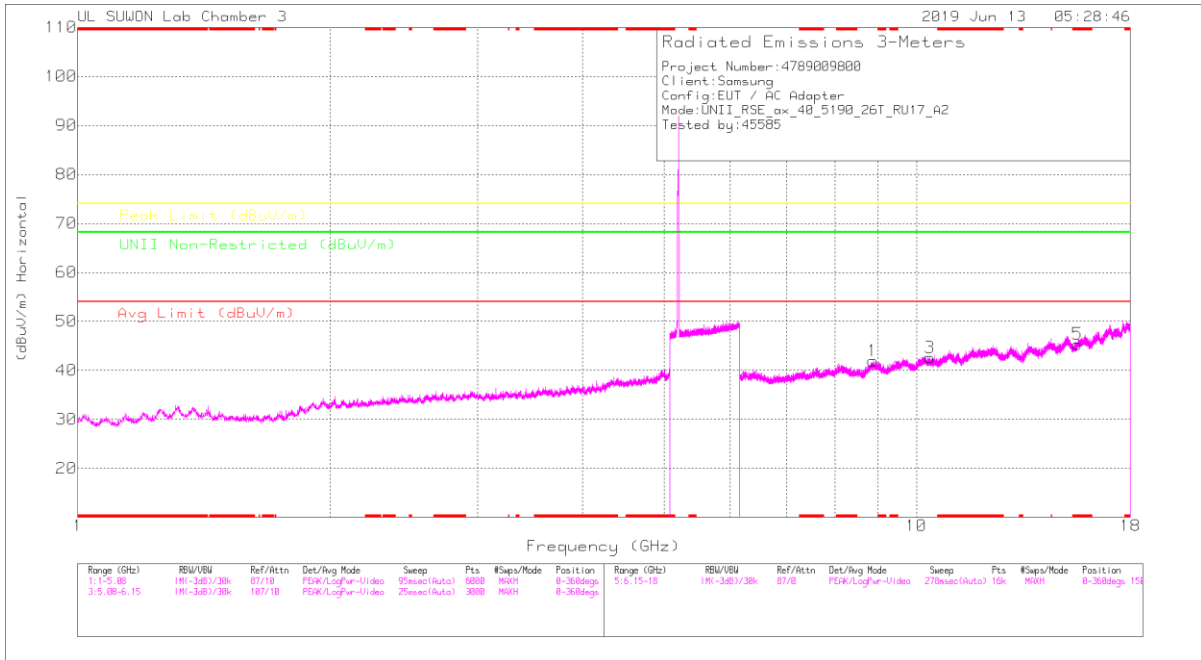

LOW CHANNEL VERTICAL

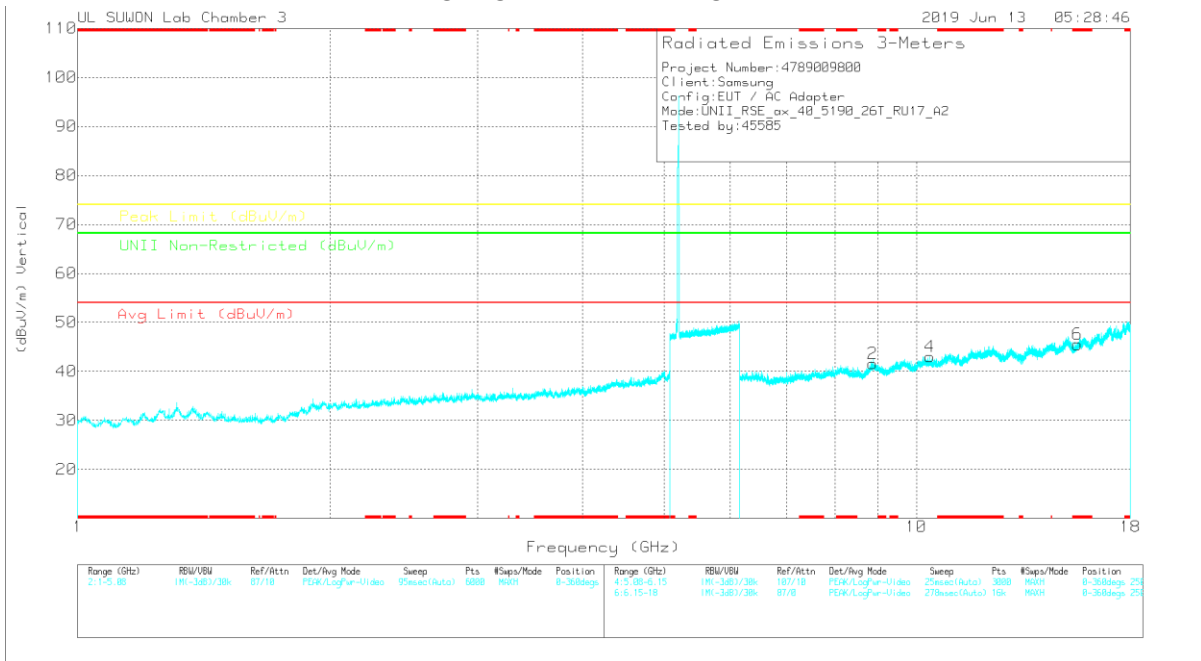

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	8.877	26.23	PK	36.5	-20.8	0	41.93	-	-	-	-	68.2	-26.27	0-360	150	H
3	10.382	24.1	PK	37.6	-19.1	0	42.6	-	-	-	-	68.2	-25.6	0-360	150	H
5	* 15.569	24.75	PK	40.2	-19.6	0	45.35	-	-	74	-28.65	-	-	0-360	150	H
2	8.873	25.85	PK	36.5	-20.8	0	41.55	-	-	-	-	68.2	-26.65	0-360	250	V
4	10.38	24.58	PK	37.6	-19.2	0	42.98	-	-	-	-	68.2	-25.22	0-360	250	V
6	* 15.568	24.91	PK	40.2	-19.6	0	45.51	-	-	74	-28.49	-	-	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

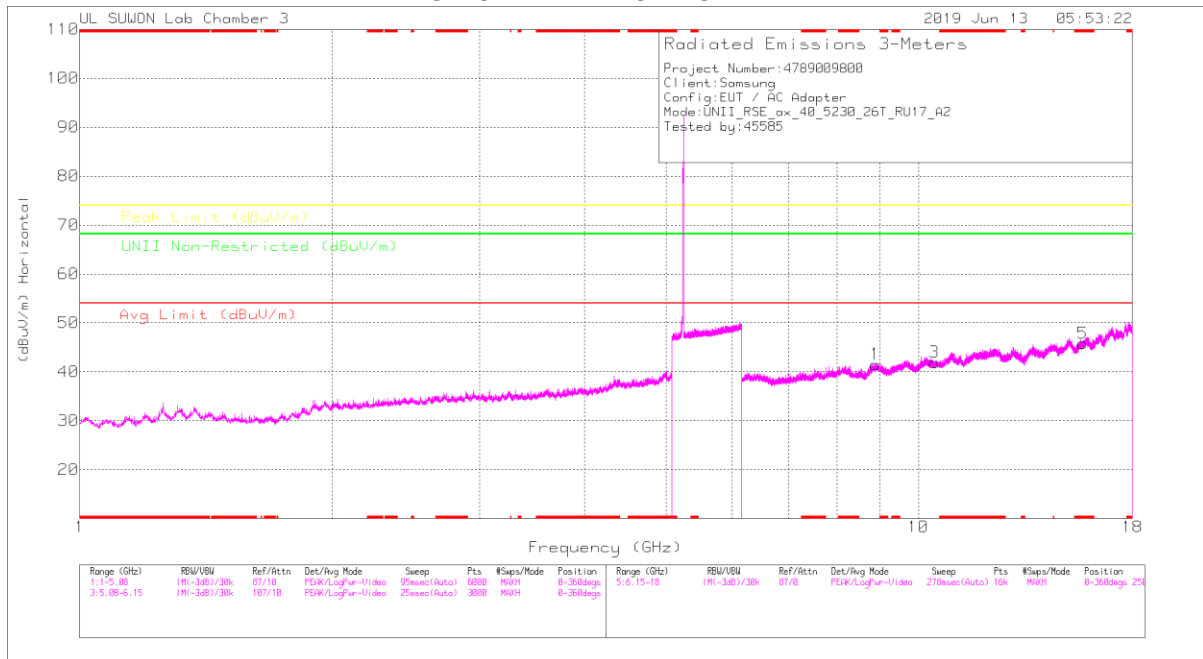

HIGH CHANNEL VERTICAL

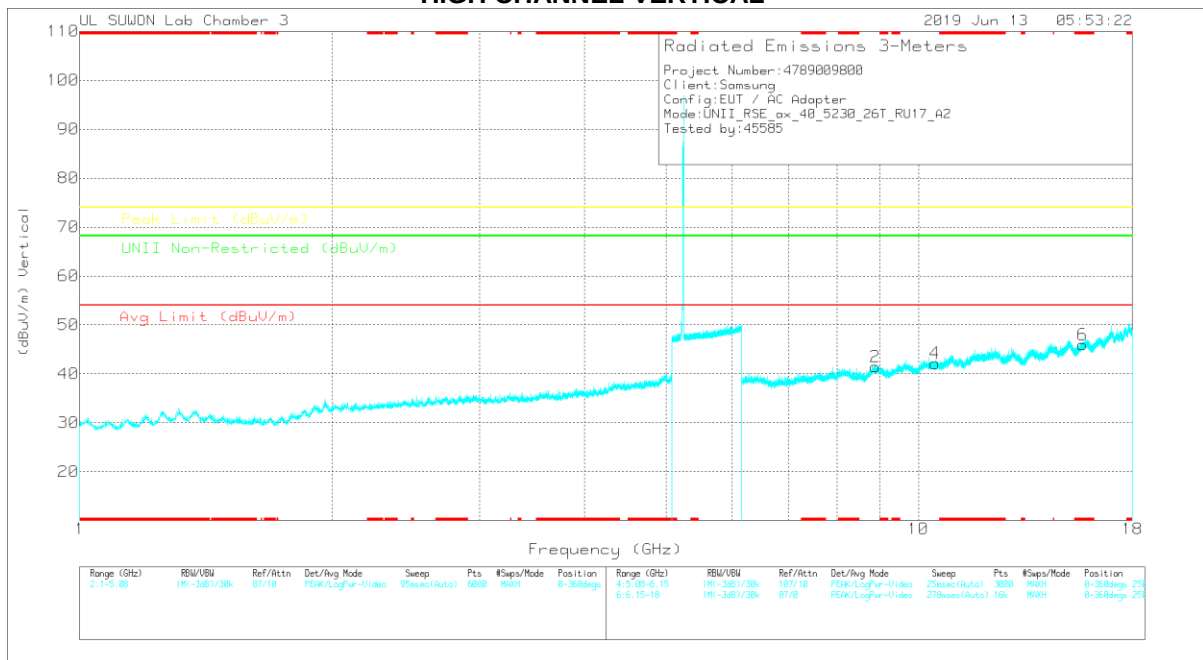

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	8.89	25.92	PK	36.5	-20.9	0	41.52	-	-	-	-	68.2	-26.68	0-360	150	H
3	10.453	23.5	PK	37.7	-19.3	0	41.9	-	-	-	-	68.2	-26.3	0-360	150	H
5	* 15.687	24.68	PK	40.4	-19.3	0	45.78	-	-	74	-28.22	-	-	0-360	250	H
2	8.895	25.83	PK	36.5	-20.9	0	41.43	-	-	-	-	68.2	-26.77	0-360	150	V
4	10.46	23.74	PK	37.7	-19.3	0	42.14	-	-	-	-	68.2	-26.06	0-360	150	V
6	* 15.691	24.87	PK	40.4	-19.3	0	45.97	-	-	74	-28.03	-	-	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HE80 RU mode (ANT_1 / 26T / Mid: 18)

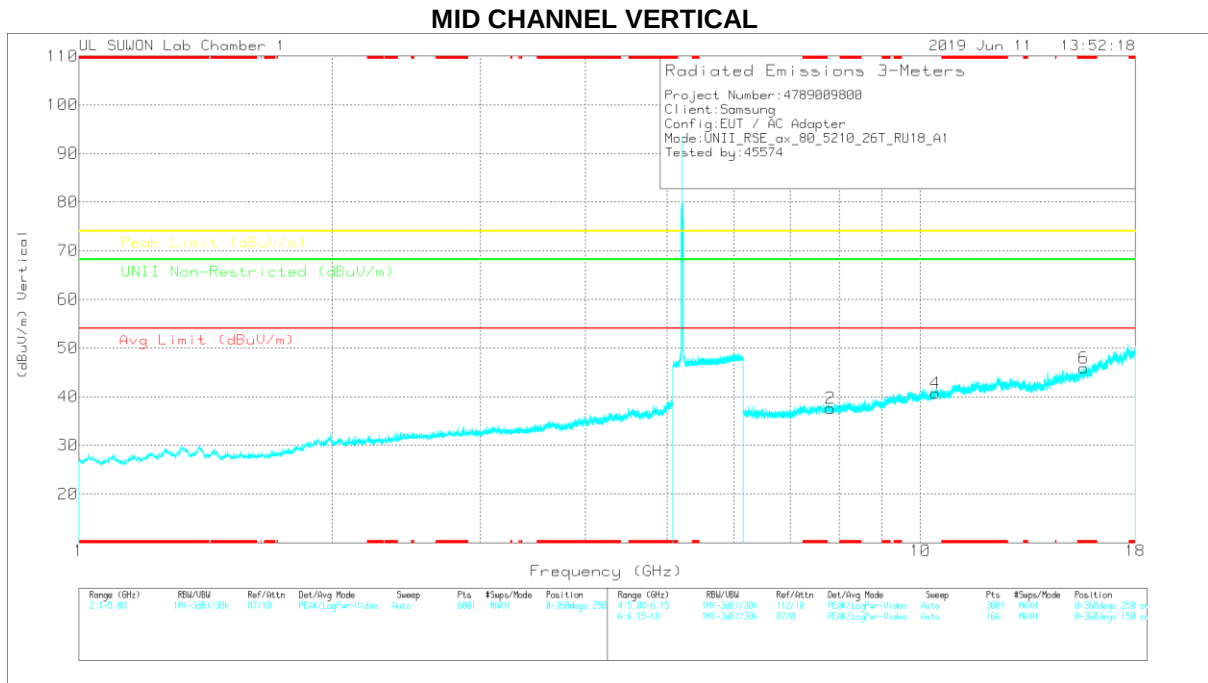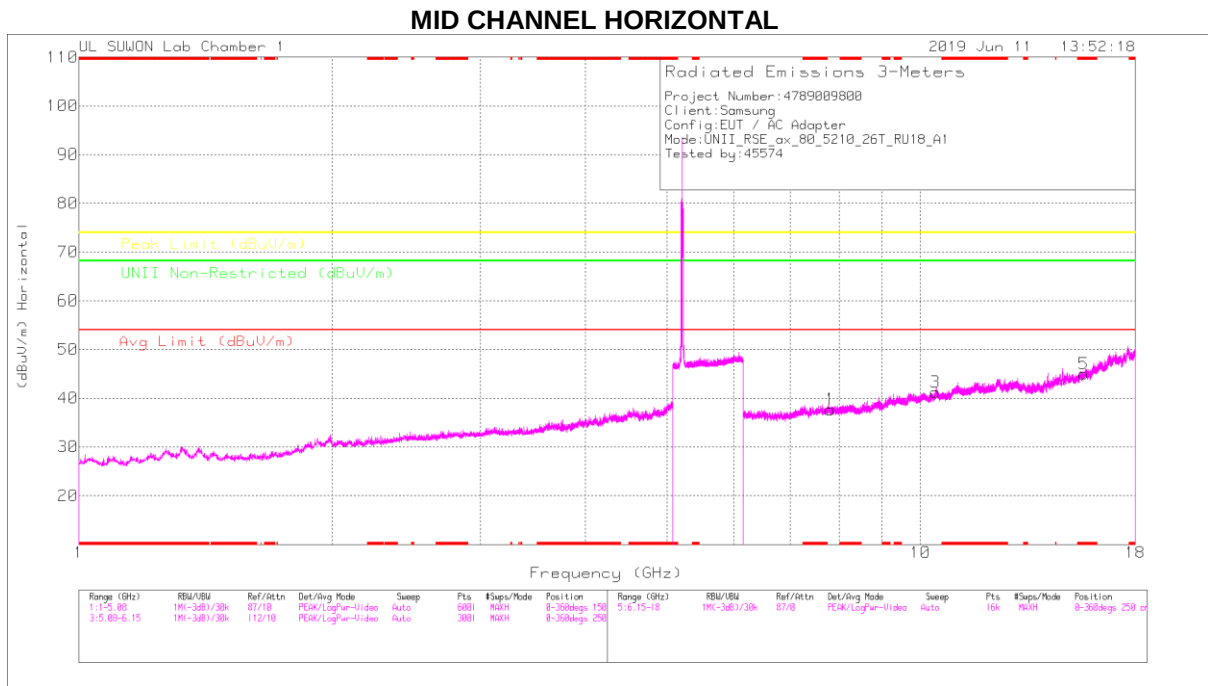

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.8163	28.38	PK	35.9	-26.6	0	37.68	-	-	-	-	68.2	-30.52	0-360	250	H
3	10.42018	25.09	PK	37.6	-21.5	0	41.19	-	-	-	-	68.2	-27.01	0-360	250	H
5	* 15.62719	26.03	PK	40.3	-21.4	0	44.93	-	-	74	-29.07	-	-	0-360	150	H
2	7.81704	28.33	PK	35.9	-26.6	0	37.63	-	-	-	-	68.2	-30.57	0-360	250	V
4	10.41944	24.61	PK	37.6	-21.5	0	40.71	-	-	-	-	68.2	-27.49	0-360	150	V
6	* 15.62867	26.92	PK	40.3	-21.3	0	45.92	-	-	74	-28.08	-	-	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HE80 RU mode (ANT_2 / 26T / Mid: 18)

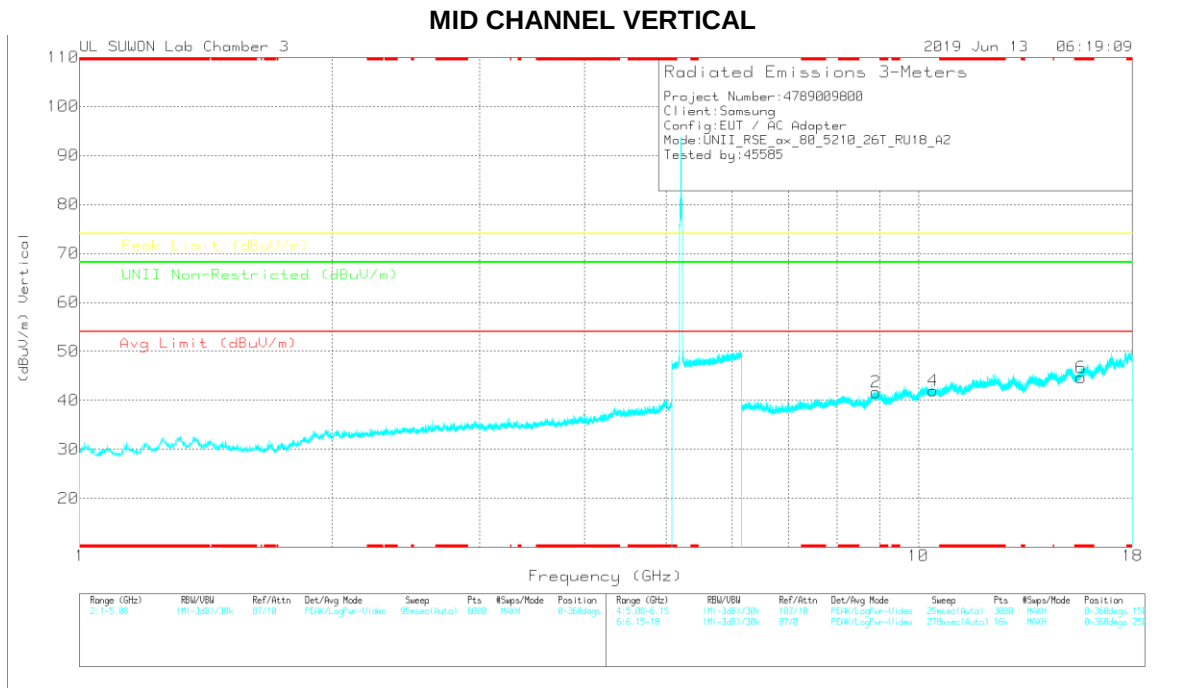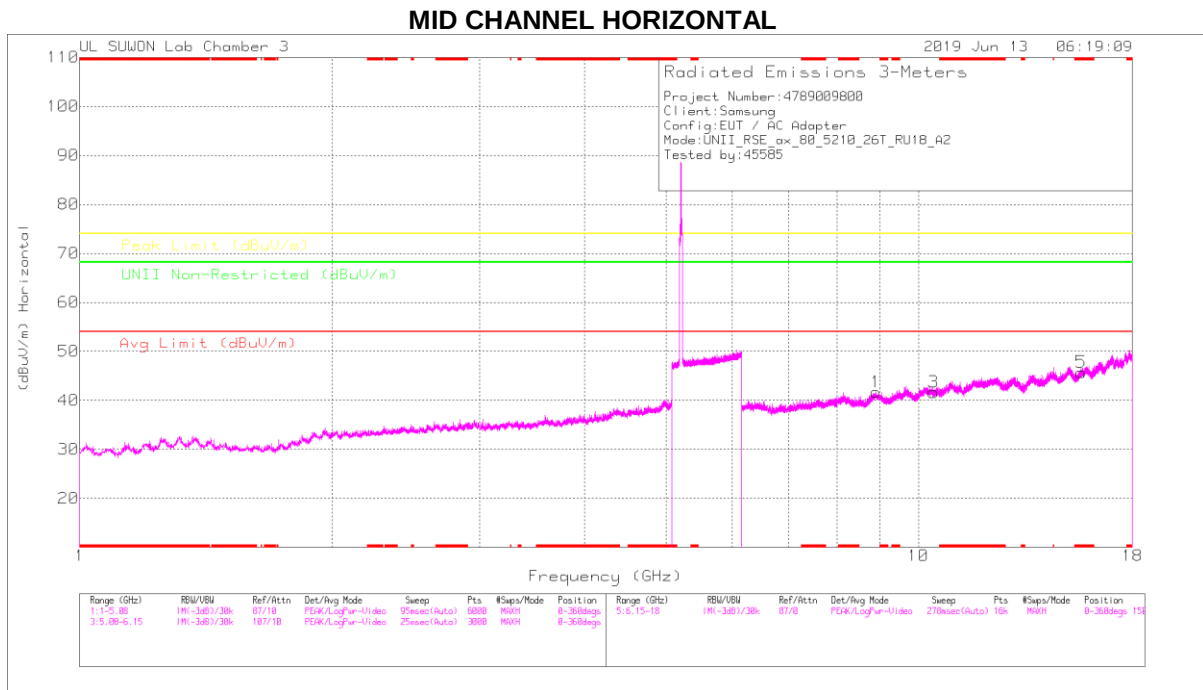

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Ag Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	8.894	26.19	PK	36.5	-21	0	41.69	-	-	-	-	68.2	-26.51	0-360	150	H
3	10.421	23.36	PK	37.6	-19.3	0	41.66	-	-	-	-	68.2	-26.54	0-360	150	H
5	* 15.63	24.84	PK	40.3	-19.4	0	45.74	-	-	74	-28.26	-	-	0-360	250	H
2	8.897	26.17	PK	36.5	-21	0	41.67	-	-	-	-	68.2	-26.53	0-360	150	V
4	10.419	23.73	PK	37.6	-19.4	0	41.93	-	-	-	-	68.2	-26.27	0-360	250	V
6	* 15.631	23.78	PK	40.3	-19.4	0	44.68	-	-	74	-29.32	-	-	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).


11.2. 5.3 GHz_1Tx (SISO)

11.2.1.TX ABOVE 1GHz 802.11ax MODE IN THE 5.3GHz BAND

RESTRICTED BANDEDGE (HIGH CHANNEL)

HE20 SU mode (ANT_1)

HORIZONTAL PEAK AND AVERAGE PLOT

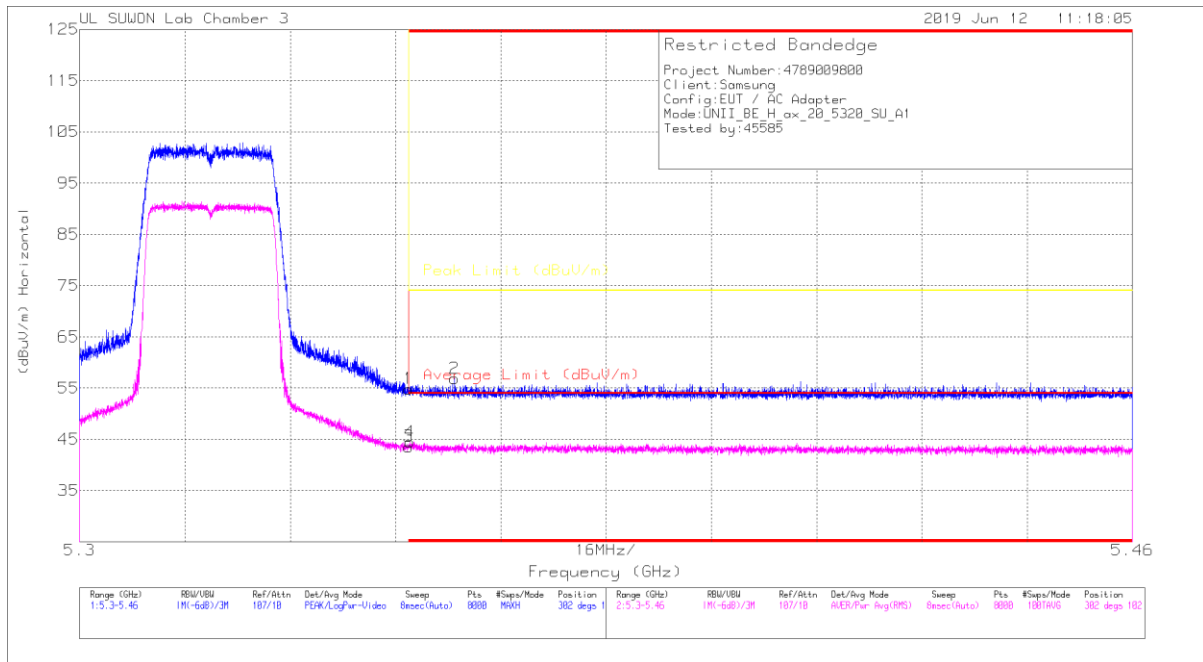

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	38.85	Pk	34.7	-18.7	0	54.85	-	-	74	-19.15	302	102	H
2	* 5.357	40.85	Pk	34.7	-18.7	0	56.85	-	-	74	-17.15	302	102	H
3	* 5.35	27.97	RMS	34.7	-19.1	0	43.57	54	-10.43	-	-	302	102	H
4	* 5.35	28.88	RMS	34.7	-19.1	0	44.48	54	-9.52	-	-	302	102	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

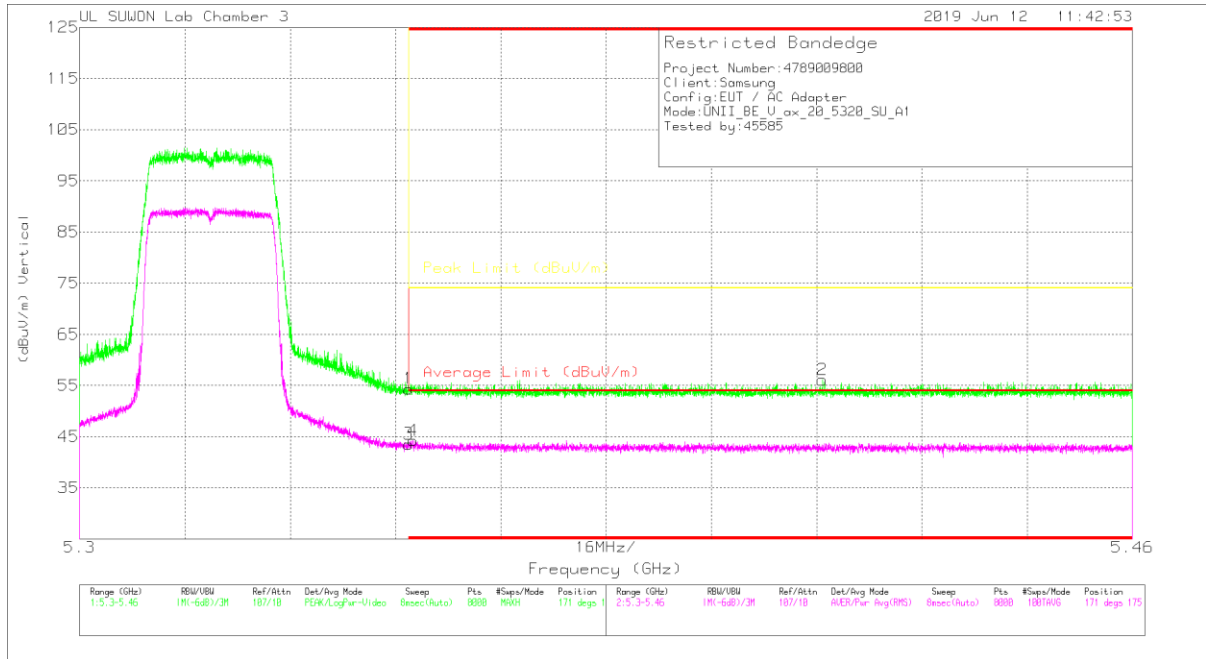

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	38.36	PK	34.7	-18.7	0	54.36	-	-	74	-19.64	171	175	V
2	* 5.413	40	PK	34.7	-18.6	0	56.1	-	-	74	-17.9	171	175	V
3	* 5.35	27.96	RMS	34.7	-19.1	0	43.56	54	-10.44	-	-	171	175	V
4	* 5.351	28.66	RMS	34.7	-19.1	0	44.26	54	-9.74	-	-	171	175	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

HE20 SU mode (ANT_2)

HORIZONTAL PEAK AND AVERAGE PLOT

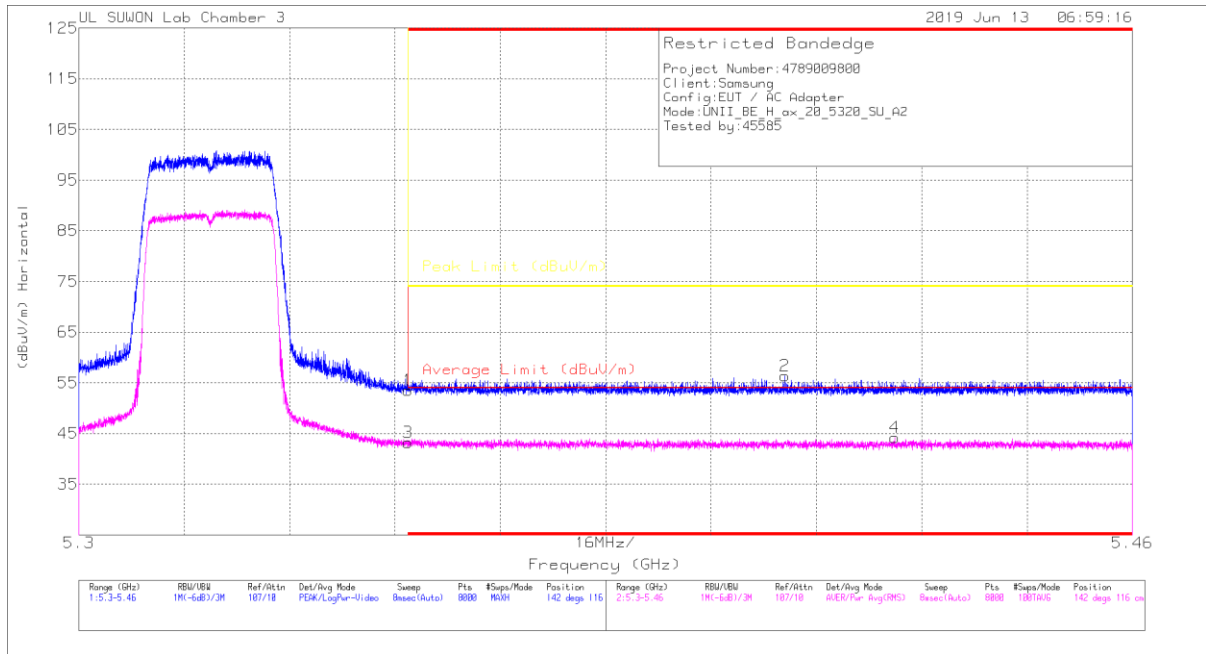

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	37.56	PK	34.7	-18.7	0	53.56	-	-	74	-20.44	142	116	H
2	* 5.407	40.26	PK	34.7	-18.6	0	56.36	-	-	74	-17.64	142	116	H
3	* 5.35	27.58	RMS	34.7	-19.1	0	43.18	54	-10.82	-	-	142	116	H
4	* 5.424	28.48	RMS	34.7	-19	0	44.18	54	-9.82	-	-	142	116	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

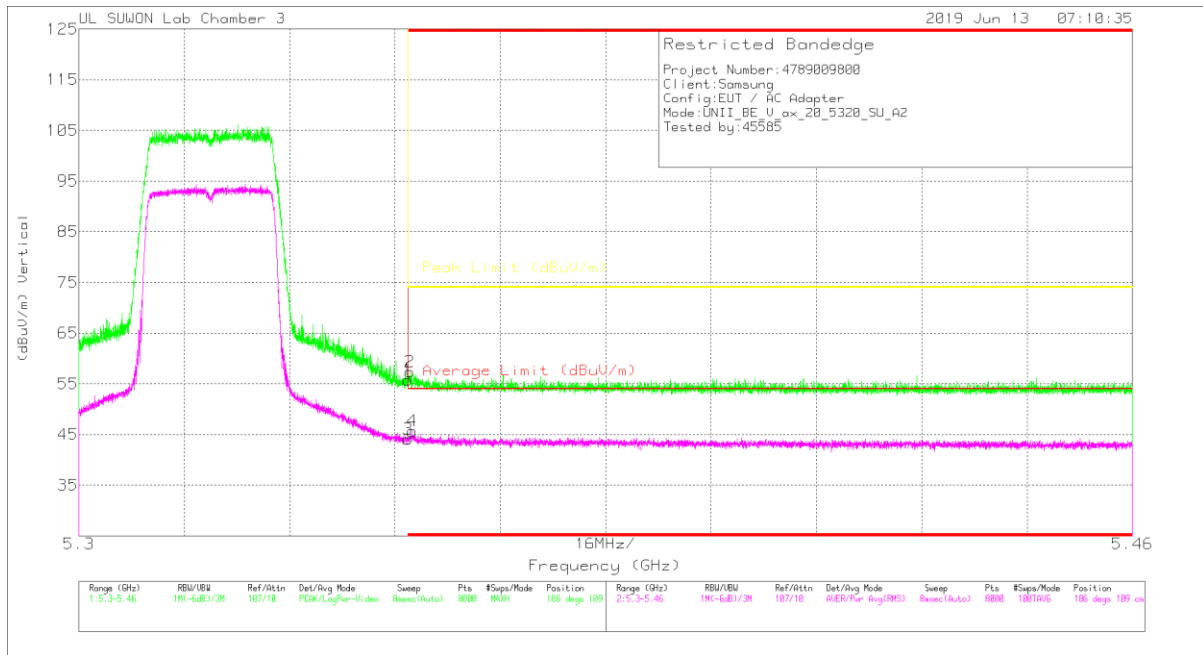

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	39.81	Pk	34.7	-18.7	0	55.81	-	-	74	-18.19	186	109	V
2	* 5.35	41.37	Pk	34.7	-18.7	0	57.37	-	-	74	-16.63	186	109	V
3	* 5.35	28.48	RMS	34.7	-19.1	0	44.08	54	-9.92	-	-	186	109	V
4	* 5.351	30.04	RMS	34.7	-19.1	0	45.64	54	-8.36	-	-	186	109	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HE40 SU mode (ANT_1)

HORIZONTAL PEAK AND AVERAGE PLOT

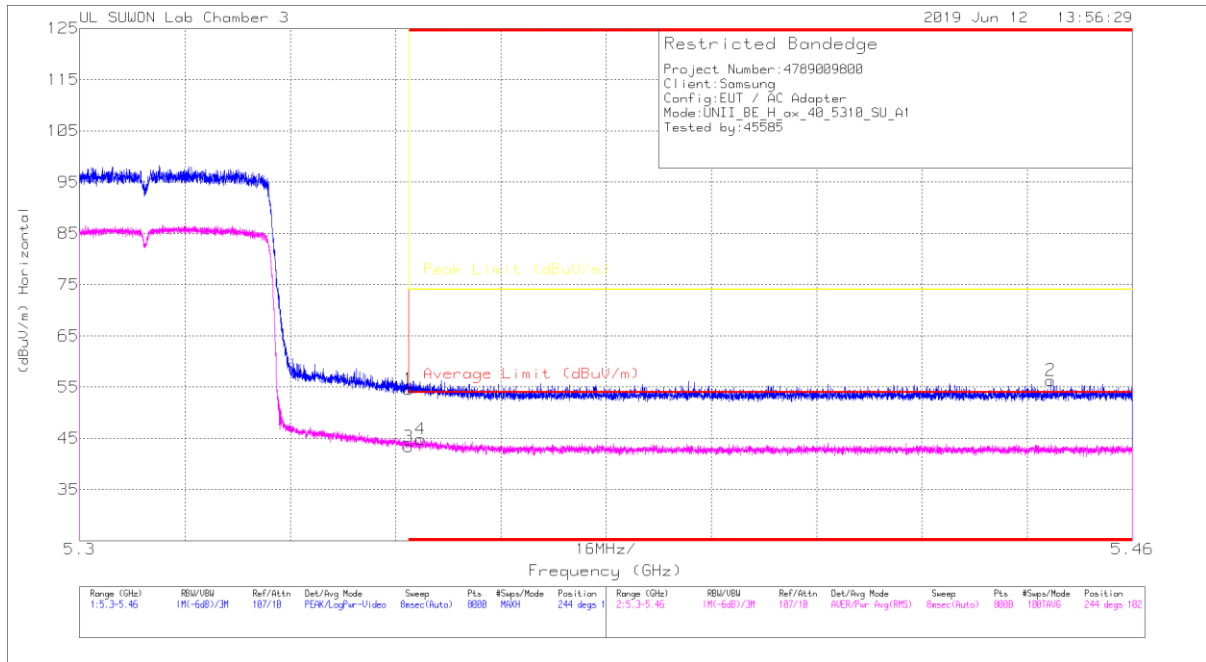

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205999	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	38.59	Pk	34.7	-18.7	0	54.59	-	-	74	-19.41	244	102	H
2	* 5.448	40.11	Pk	34.7	-18.5	0	56.31	-	-	74	-17.69	244	102	H
3	* 5.35	27.78	RMS	34.7	-19.1	0	43.38	54	-10.62	-	-	244	102	H
4	* 5.352	29.24	RMS	34.7	-19.1	0	44.84	54	-9.16	-	-	244	102	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

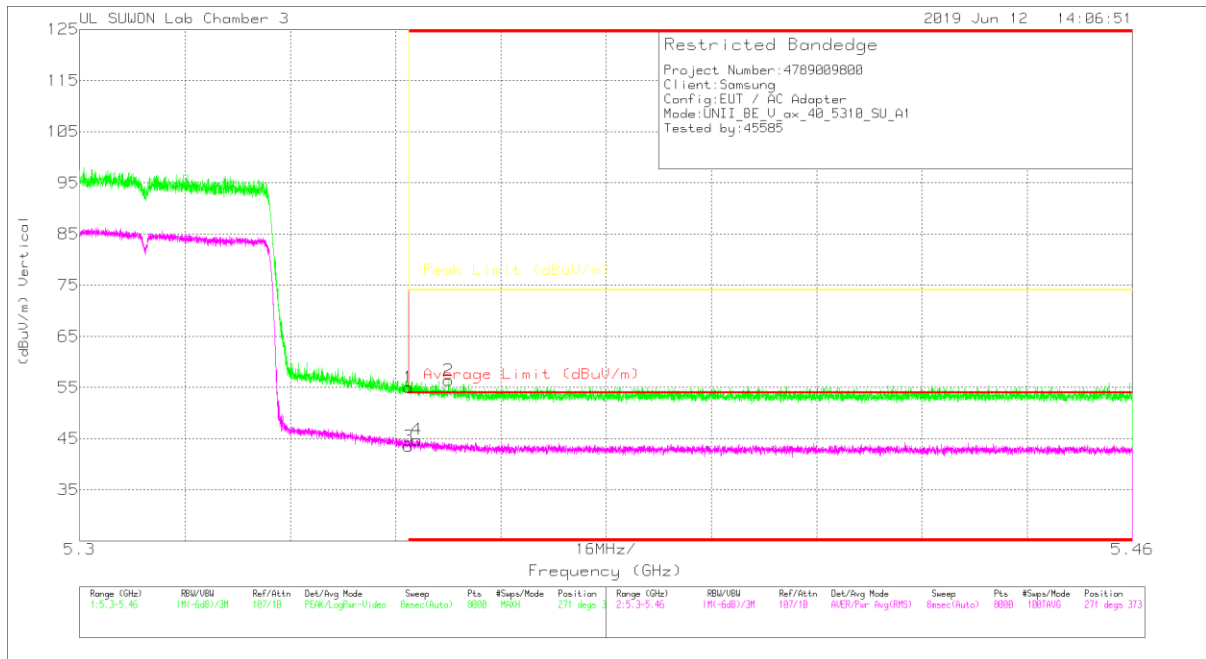

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 5.35	39.02	Pk	34.7	-18.7	0	55.02	-	-	74	-18.98	271	373	V
2	* 5.356	40.47	Pk	34.7	-18.8	0	56.37	-	-	74	-17.63	271	373	V
3	* 5.35	27.89	RMS	34.7	-19.1	0	43.49	54	-10.51	-	-	271	373	V
4	* 5.351	29.2	RMS	34.7	-19.1	0	44.8	54	-9.2	-	-	271	373	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HE40 SU mode (ANT_2)

HORIZONTAL PEAK AND AVERAGE PLOT

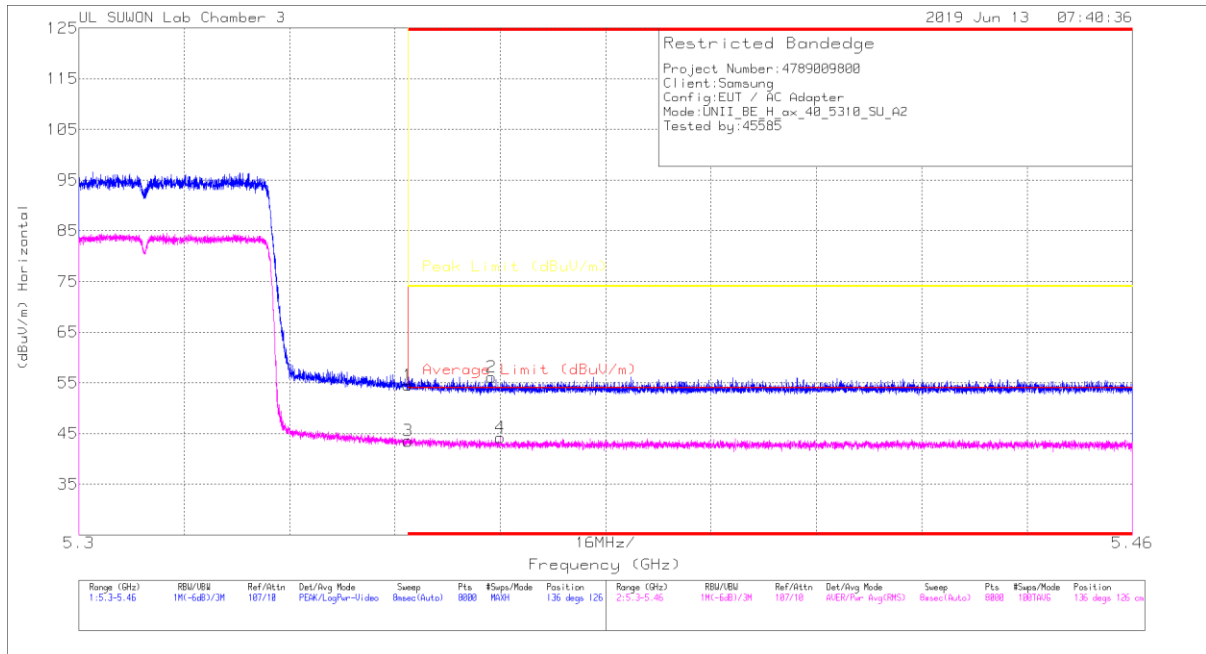

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	38.51	PK	34.7	-18.7	0	54.51	-	-	74	-19.49	136	126	H
2	* 5.363	40.27	PK	34.7	-18.8	0	56.17	-	-	74	-17.83	136	126	H
3	* 5.35	27.93	RMS	34.7	-19.1	0	43.53	54	-10.47	-	-	136	126	H
4	* 5.364	28.62	RMS	34.7	-19.1	0	44.22	54	-9.78	-	-	136	126	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

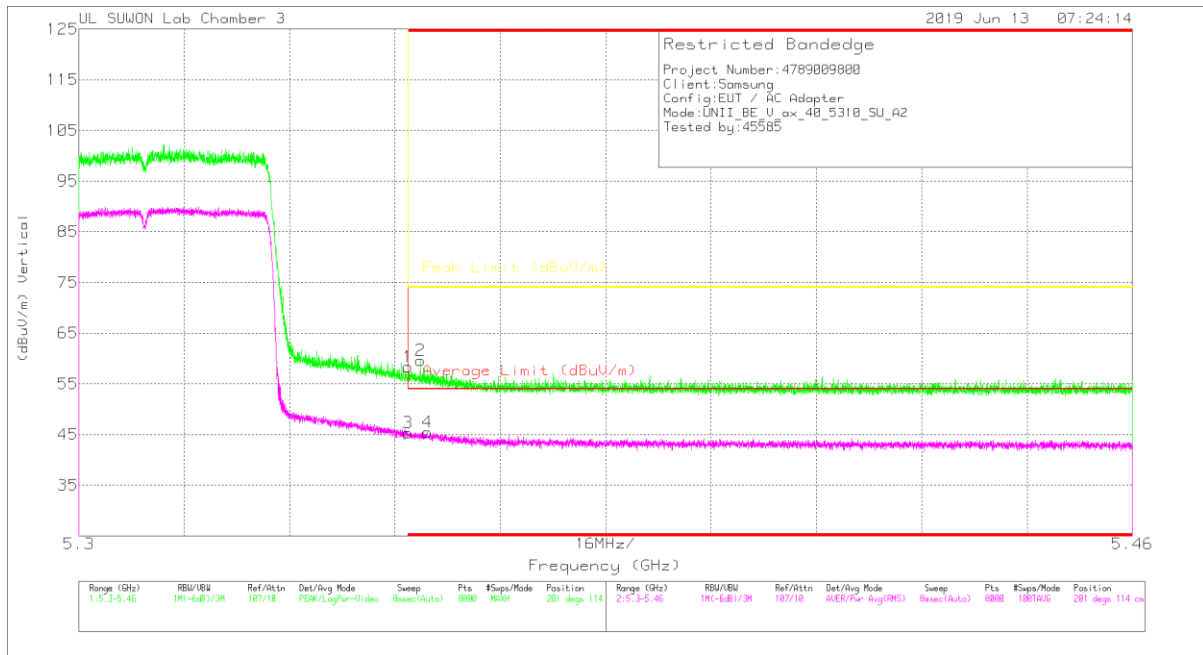

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	42.32	Pk	34.7	-18.7	0	58.32	-	-	74	-15.68	201	114	V
2	* 5.352	43.66	Pk	34.7	-18.7	0	59.66	-	-	74	-14.34	201	114	V
3	* 5.35	29.74	RMS	34.7	-19.1	0	45.34	54	-8.66	-	-	201	114	V
4	* 5.353	29.9	RMS	34.7	-19.1	0	45.5	54	-8.5	-	-	201	114	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HE80 SU mode (ANT_1)

HORIZONTAL PEAK AND AVERAGE PLOT

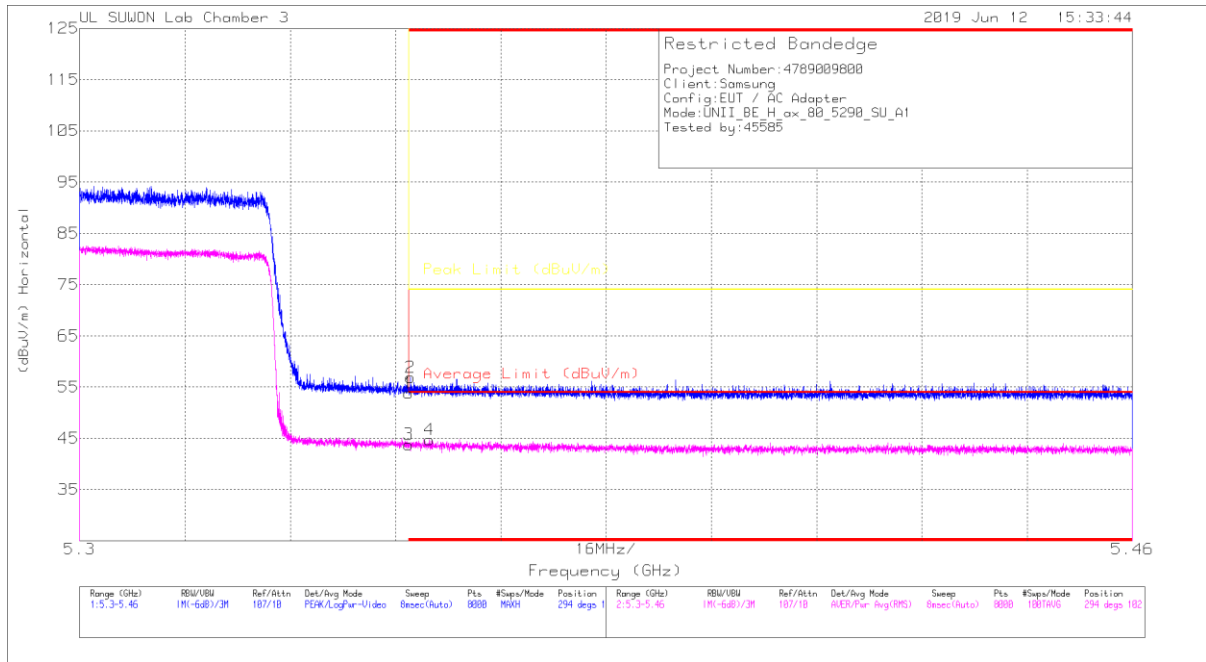

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	37.81	Pk	34.7	-18.7	0	53.81	-	-	74	-20.19	294	102	H
2	* 5.35	40.86	Pk	34.7	-18.7	0	56.86	-	-	74	-17.14	294	102	H
3	* 5.35	28.21	RMS	34.7	-19.1	0	43.81	54	-10.19	-	-	294	102	H
4	* 5.353	29.14	RMS	34.7	-19.1	0	44.74	54	-9.26	-	-	294	102	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

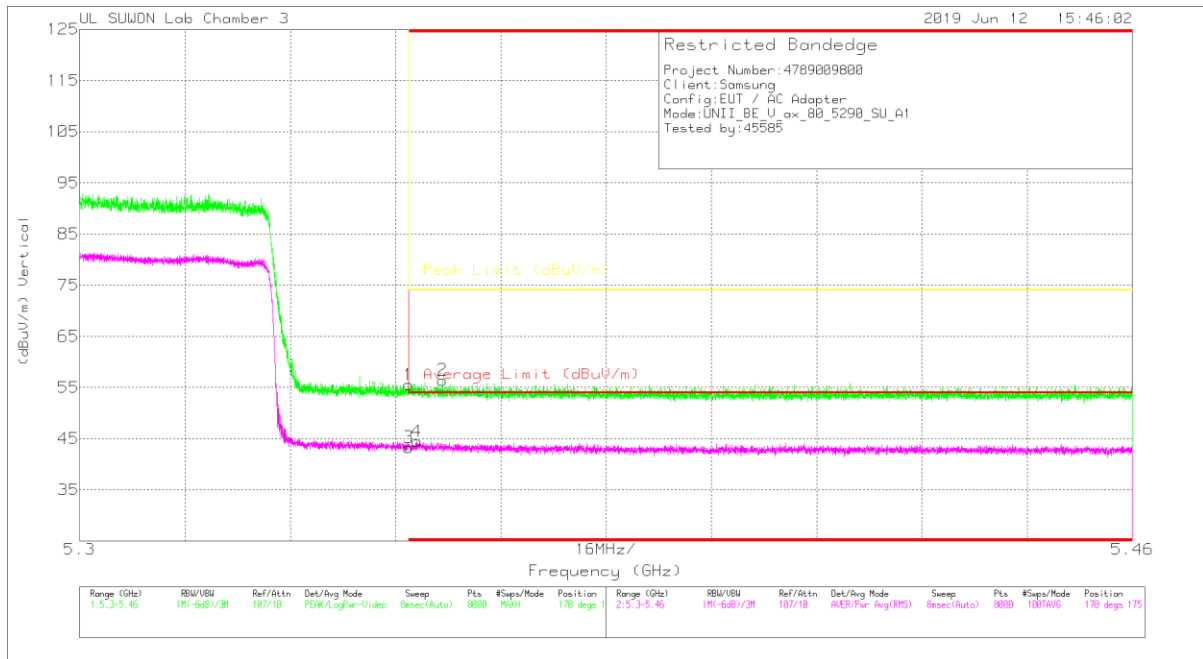

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	39.52	Pk	34.7	-18.7	0	55.52	-	-	74	-18.48	170	175	V
2	* 5.355	40.53	Pk	34.7	-18.8	0	56.43	-	-	74	-17.57	170	175	V
3	* 5.35	27.71	RMS	34.7	-19.1	0	43.31	54	-10.69	-	-	170	175	V
4	* 5.351	28.91	RMS	34.7	-19.1	0	44.51	54	-9.49	-	-	170	175	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HE80 SU mode (ANT_2)

HORIZONTAL PEAK AND AVERAGE PLOT

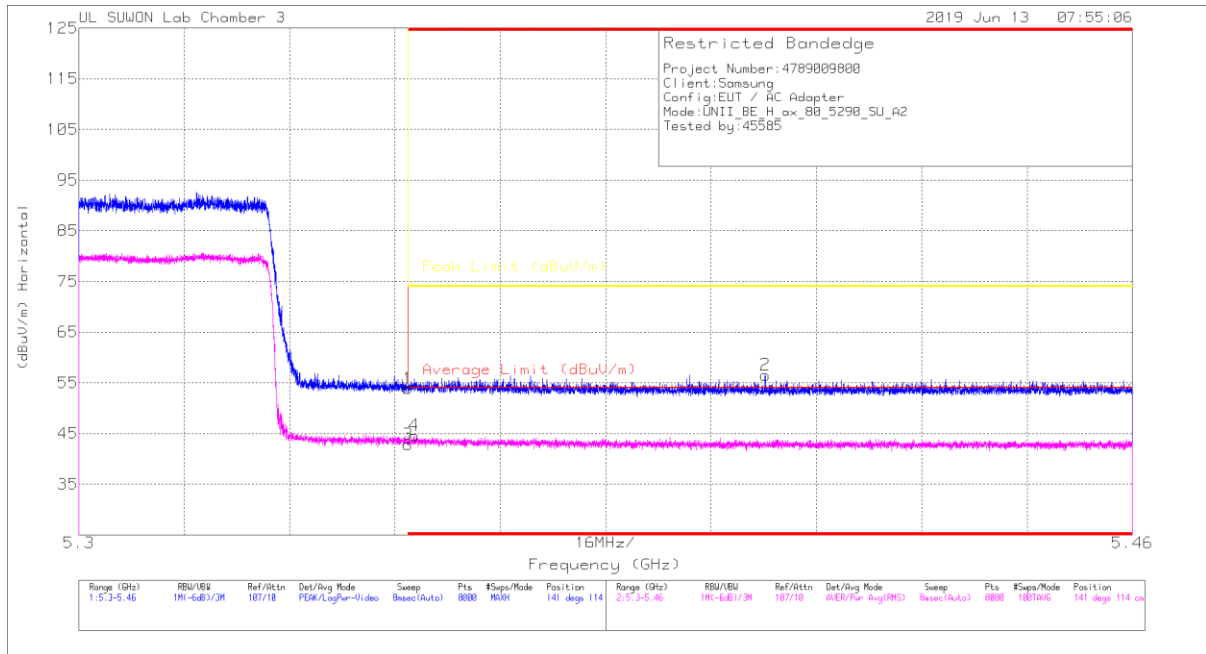

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	37.9	PK	34.7	-18.7	0	53.9	-	-	74	-20.1	141	114	H
2	* 5.404	40.46	PK	34.7	-18.6	0	56.56	-	-	74	-17.44	141	114	H
3	* 5.35	27.23	RMS	34.7	-19.1	0	42.83	54	-11.17	-	-	141	114	H
4	* 5.351	29.04	RMS	34.7	-19.1	0	44.64	54	-9.36	-	-	141	114	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

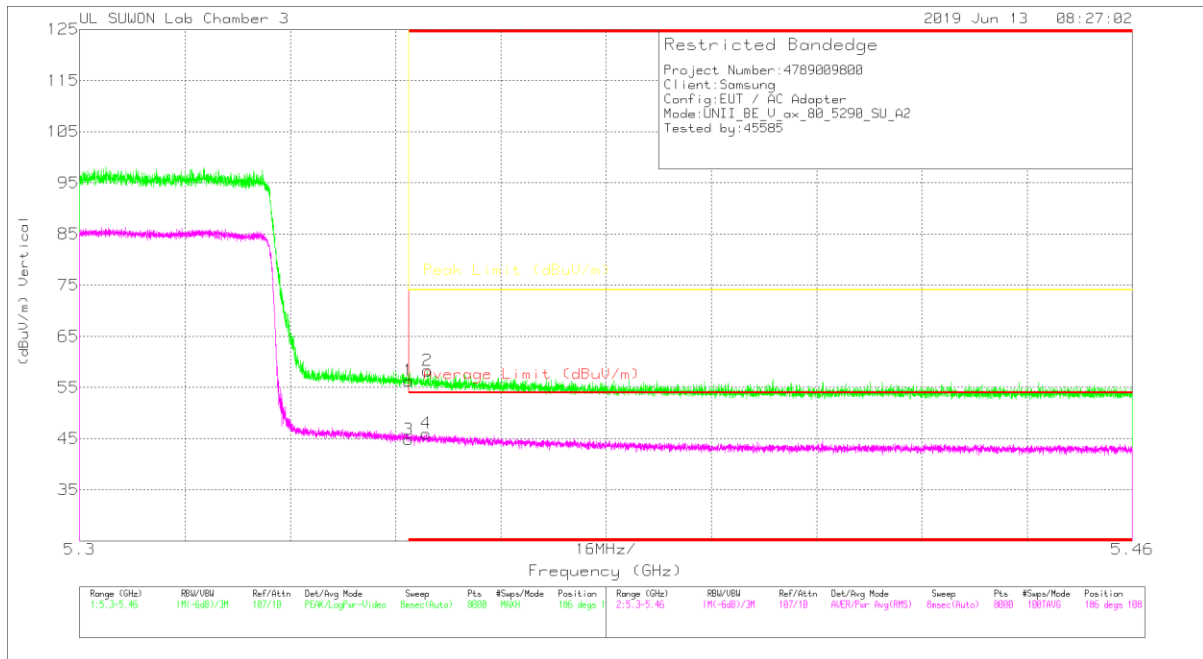

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	40.33	Pk		34.7	-18.7	0	56.33	-	74	-17.67	186	108	V
2	* 5.353	42.4	Pk		34.7	-18.8	0	58.3	-	74	-15.7	186	108	V
3	* 5.35	29.25	RMS		34.7	-19.1	0	44.85	54	-9.15	-	186	108	V
4	* 5.353	30.42	RMS		34.7	-19.1	0	46.02	54	-7.98	-	186	108	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

484T RU mode (ANT_1 / HE80 / RU offset 66)

HORIZONTAL PEAK AND AVERAGE PLOT

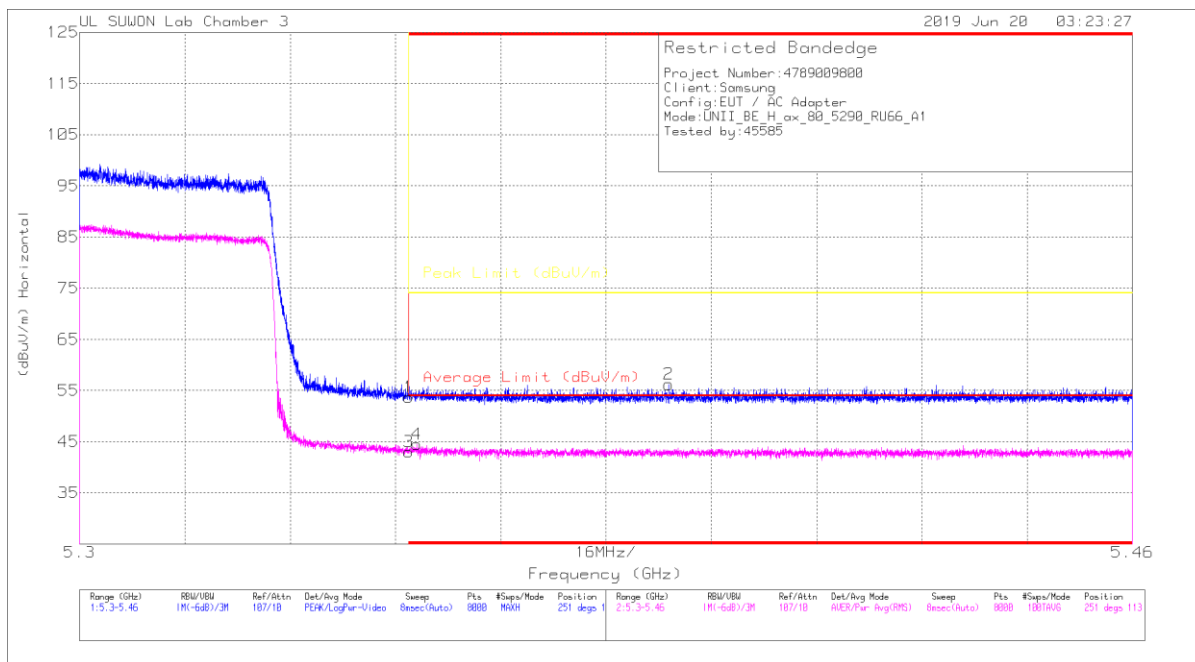

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	100B[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 5.35	37.71	Pk	34.7	-18.7	0	53.71	-	-	74	-20.29	251	113	H
2	* 5.389	40.11	Pk	34.7	-18.6	0	56.21	-	-	74	-17.79	251	113	H
3	* 5.35	27.42	RMS	34.7	-19.1	0	43.02	54	-10.98	-	-	251	113	H
4	* 5.351	28.86	RMS	34.7	-19.1	0	44.46	54	-9.54	-	-	251	113	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

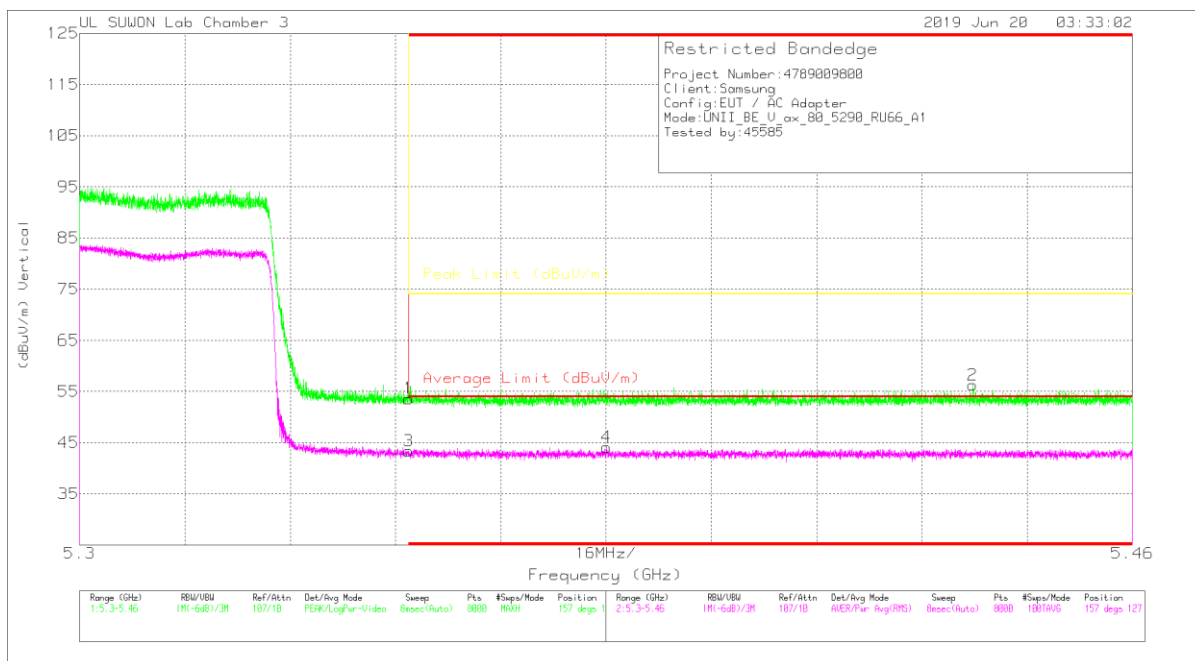

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	37.63	Pk	34.7	-18.7	0	53.63	-	-	74	-20.37	157	127	V
2	* 5.436	40.05	Pk	34.7	-18.5	0	56.25	-	-	74	-17.75	157	127	V
3	* 5.35	27.75	RMS	34.7	-19.1	0	43.35	54	-10.65	-	-	157	127	V
4	* 5.38	28.53	RMS	34.7	-19.1	0	44.13	54	-9.87	-	-	157	127	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

484T RU mode (ANT_2 / HE80 / RU offset 66)

HORIZONTAL PEAK AND AVERAGE PLOT

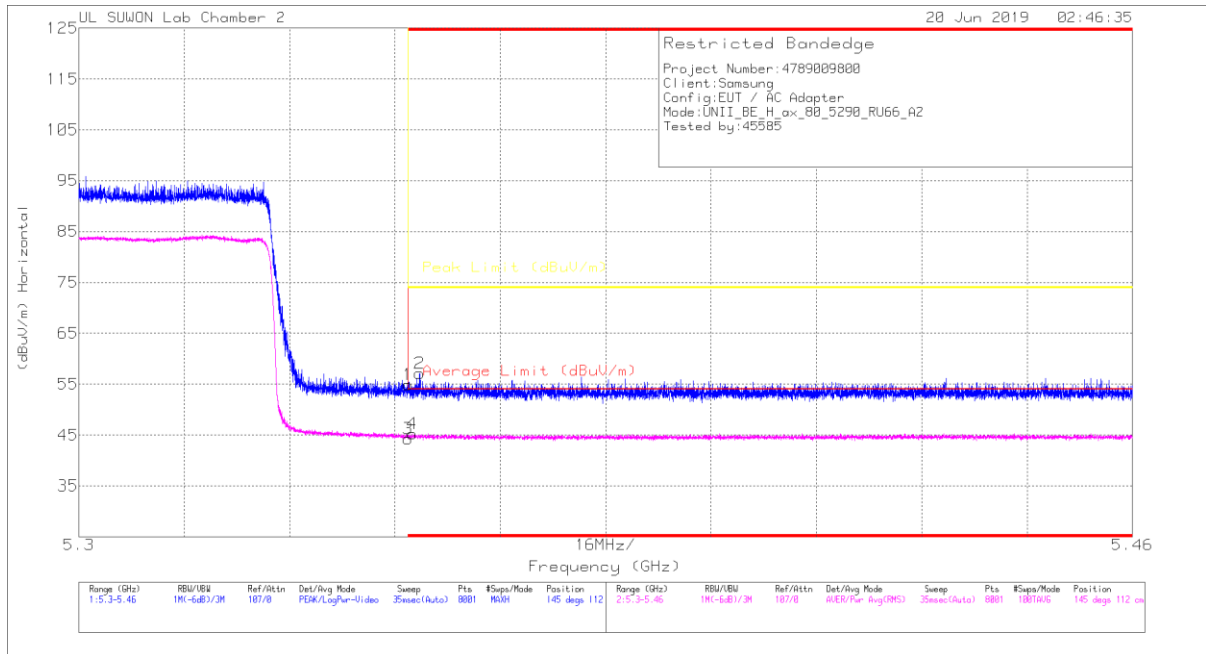

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 5.35	38.49	Pk	34.5	-18.1	0	54.89	-	-	74	-19.11	145	112	H
2	* 5.352	40.74	Pk	34.5	-18.1	0	57.14	-	-	74	-16.86	145	112	H
3	* 5.35	26.88	RMS	34.5	-17.1	0	44.28	54	-9.72	-	-	145	112	H
4	* 5.351	27.9	RMS	34.5	-17.1	0	45.3	54	-8.7	-	-	145	112	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

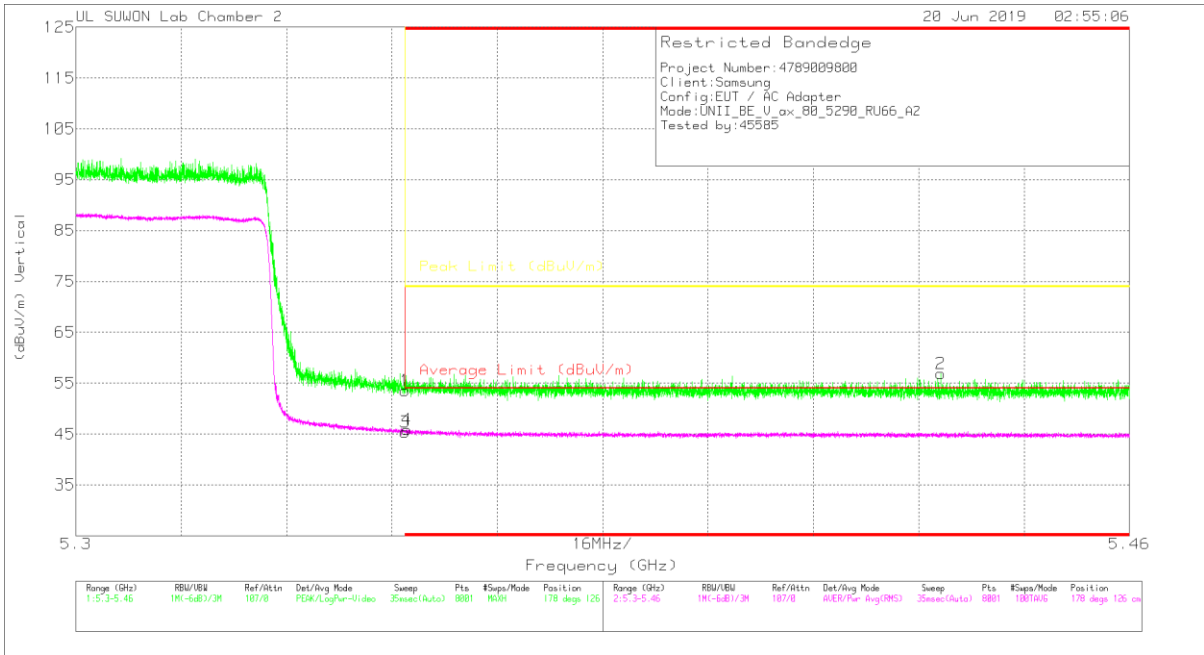

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00108724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 5.35	37.14	Pk	34.5	-18.1	0	53.54	-	-	74	-20.46	178	126	V
2	* 5.431	40.48	Pk	34.5	-18.1	0	56.88	-	-	74	-17.12	178	126	V
3	* 5.35	27.95	RMS	34.5	-17.1	0	45.35	54	-8.65	-	-	178	126	V
4	* 5.35	28.44	RMS	34.5	-17.1	0	45.84	54	-8.16	-	-	178	126	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

242T RU mode (ANT_1 / HE40 / RU offset 62)

HORIZONTAL PEAK AND AVERAGE PLOT

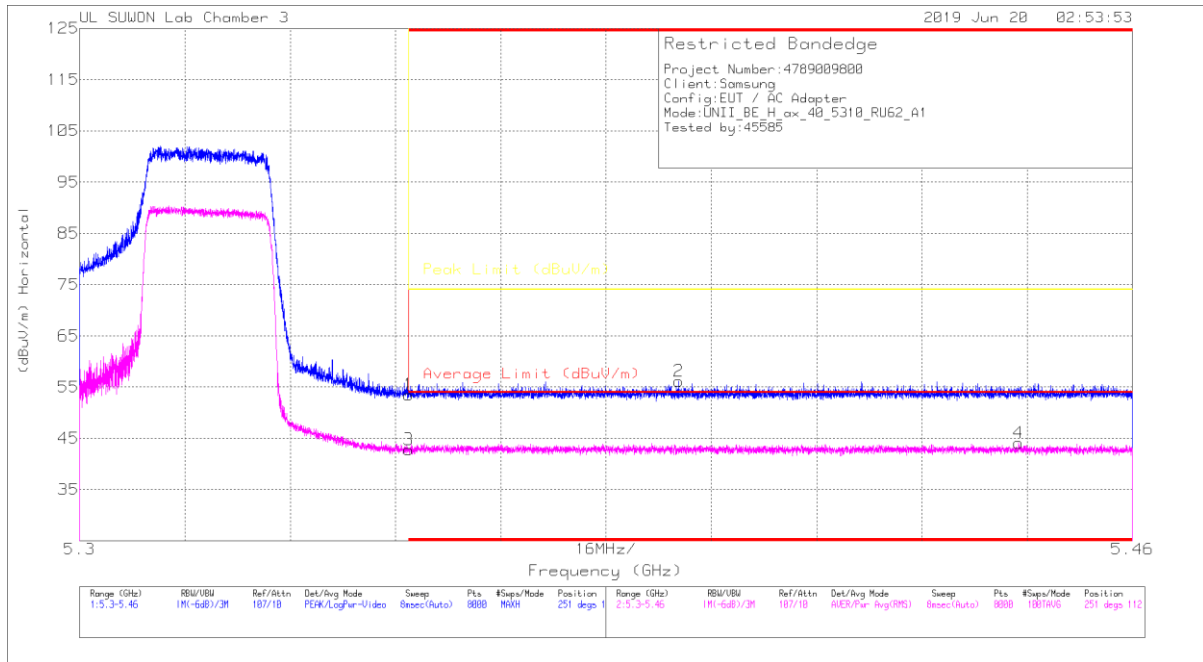

HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	37.49	Pk	34.7	-18.7	0	53.49	-	-	74	-20.51	251	112	H
2	* 5.391	40.17	Pk	34.7	-18.7	0	56.17	-	-	74	-17.83	251	112	H
3	* 5.35	27.2	RMS	34.7	-19.1	0	42.8	54	-11.2	-	-	251	112	H
4	* 5.443	28.38	RMS	34.7	-19	0	44.08	54	-9.92	-	-	251	112	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection