


VERTICAL PEAK AND AVERAGE PLOT

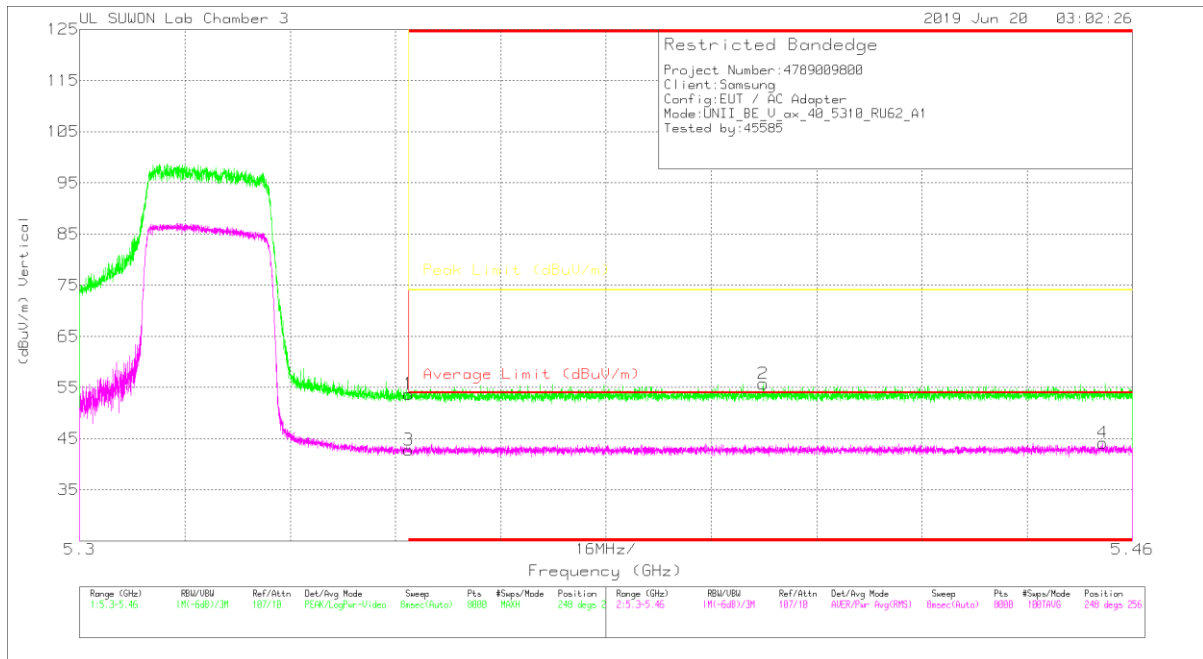

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	37.74	Pk	34.7	-18.7	0	53.74	-	-	74	-20.26	248	256	V
2	* 5.404	39.63	Pk	34.7	-18.6	0	55.73	-	-	74	-18.27	248	256	V
3	* 5.35	27.21	RMS	34.7	-19.1	0	42.81	54	-11.19	-	-	248	256	V
4	* 5.455	28.49	RMS	34.7	-19	0	44.19	54	-9.81	-	-	248	256	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

242T RU mode (ANT_2 / HE40 / RU offset 62)

HORIZONTAL PEAK AND AVERAGE PLOT

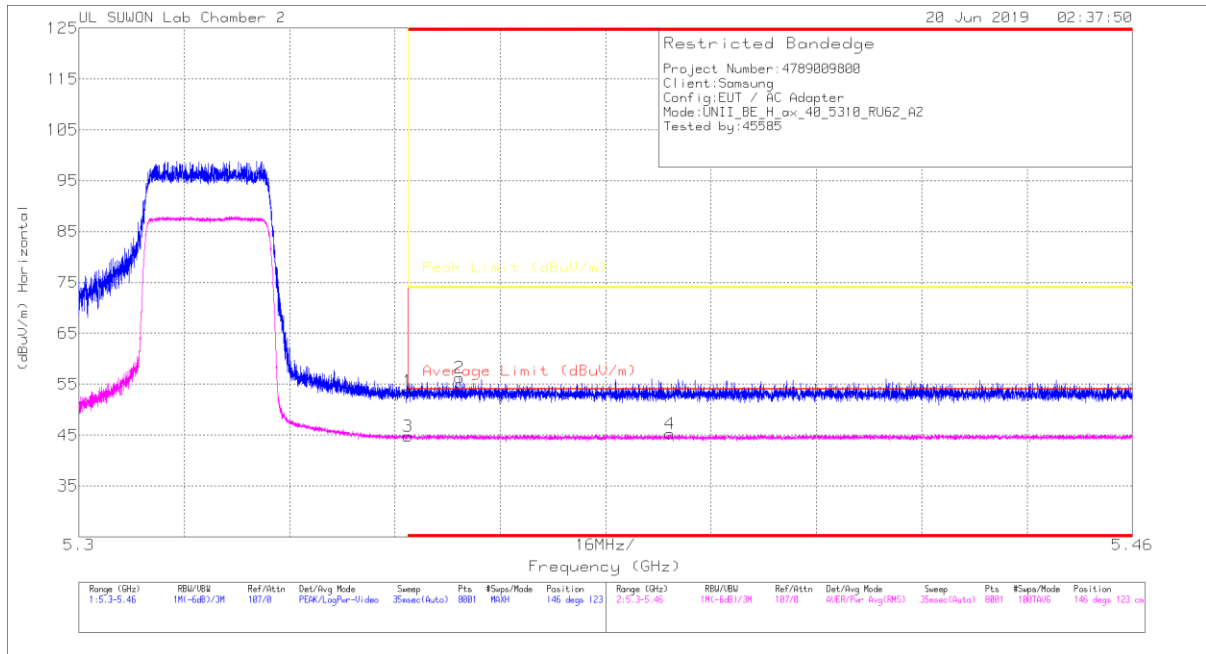

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 5.35	37.25	Pk	34.5	-18.1	0	53.65	-	-	74	-20.35	146	123	H
2	* 5.358	39.85	Pk	34.5	-18.1	0	56.25	-	-	74	-17.75	146	123	H
3	* 5.35	27.35	RMS	34.5	-17.1	0	44.75	54	-9.25	-	-	146	123	H
4	* 5.39	27.76	RMS	34.5	-17	0	45.26	54	-8.74	-	-	146	123	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

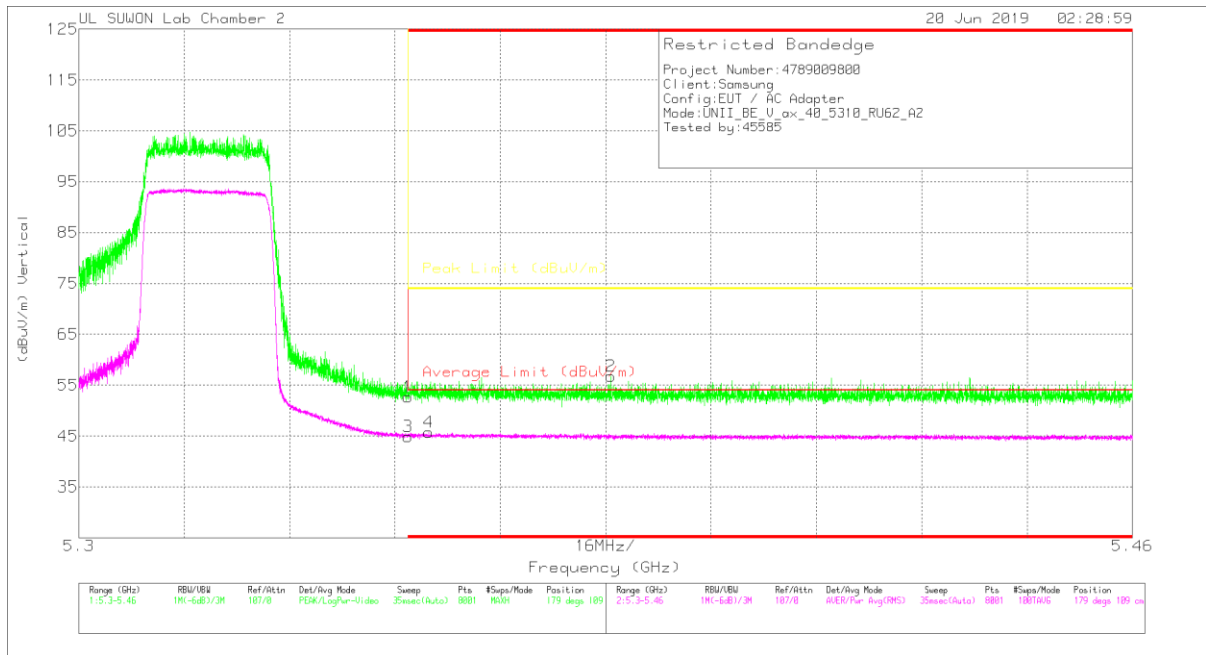

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00108724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 5.35	36.29	Pk	34.5	-18.1	0	52.69	-	-	74	-21.31	179	109	V
2	* 5.381	40.49	Pk	34.5	-18.2	0	56.79	-	-	74	-17.21	179	109	V
3	* 5.35	27.48	RMS	34.5	-17.1	0	44.88	54	-9.12	-	-	179	109	V
4	* 5.353	28.33	RMS	34.5	-17.1	0	45.73	54	-8.27	-	-	179	109	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

106T RU mode (ANT_1 / HE20 / RU offset 54)

HORIZONTAL PEAK AND AVERAGE PLOT

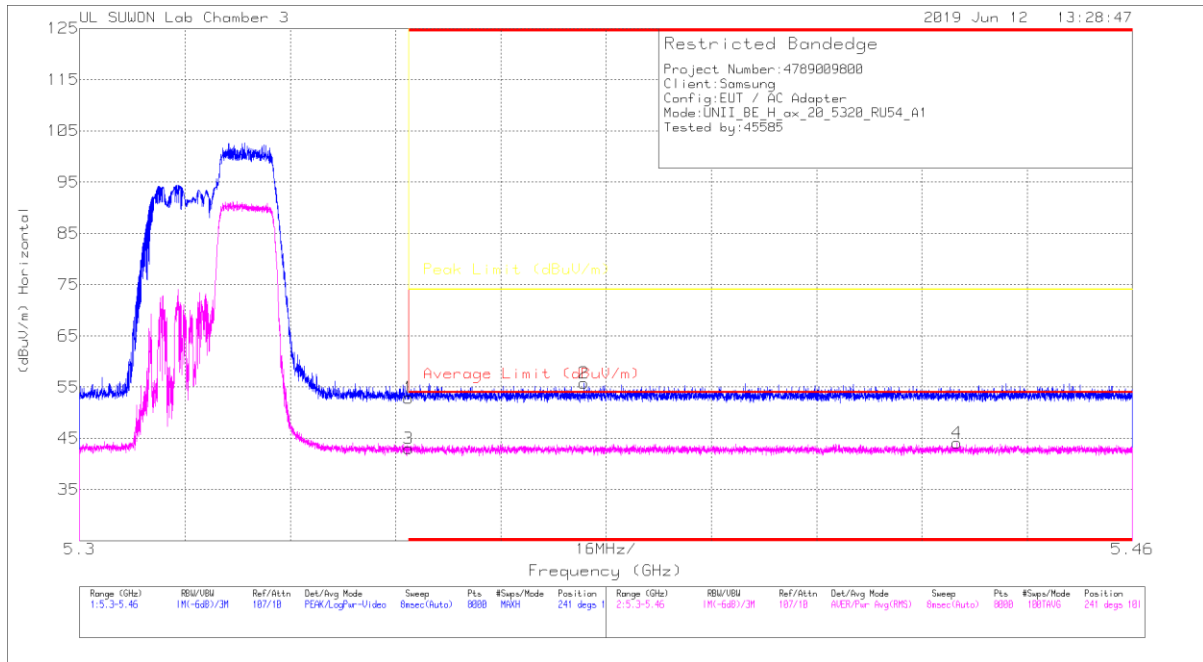

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205999	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	36.9	Pk	34.7	-18.7	0	52.9	-	-	74	-21.1	241	101	H
2	* 5.377	39.78	Pk	34.7	-18.7	0	55.78	-	-	74	-18.22	241	101	H
3	* 5.35	27.41	RMS	34.7	-19.1	0	43.01	54	-10.99	-	-	241	101	H
4	* 5.433	28.41	RMS	34.7	-19	0	44.11	54	-9.89	-	-	241	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

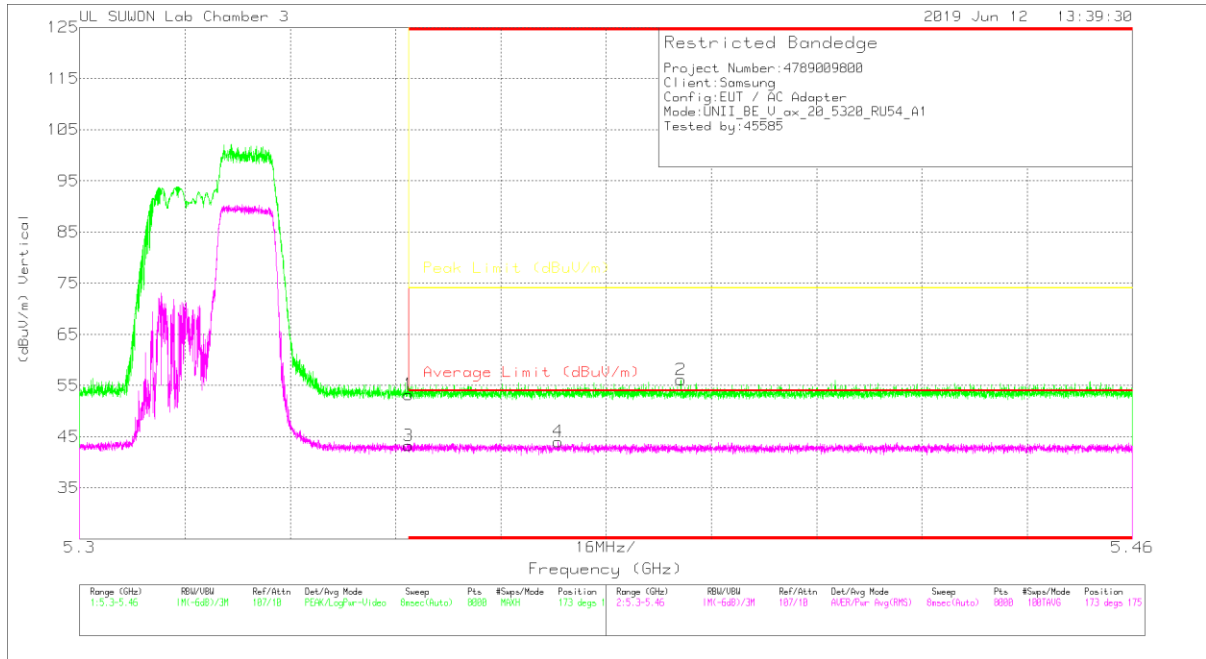

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 5.35	37.25	Pk		-18.7	0	53.25	-	-	74	-20.75	173	175	V
2	* 5.391	40.04	Pk		-18.6	0	56.14	-	-	74	-17.86	173	175	V
3	* 5.35	27.63	RMS		-19.1	0	43.23	54	-10.77	-	-	173	175	V
4	* 5.373	28.45	RMS		-19.1	0	44.05	54	-9.95	-	-	173	175	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

106T RU mode (ANT_2 / HE40 / RU offset 56)

HORIZONTAL PEAK AND AVERAGE PLOT

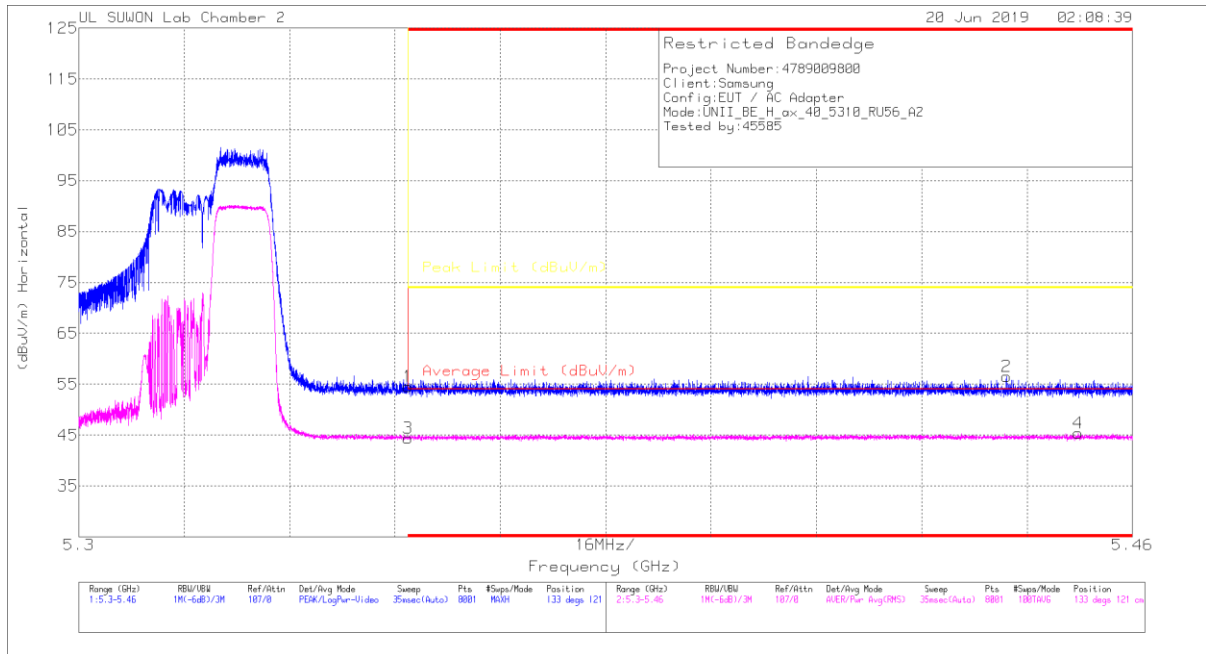

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 5.35	38.15	Pk	34.5	-18.1	0	54.55	-	-	74	-19.45	133	121	H
2	* 5.441	40.25	Pk	34.5	-18.2	0	56.55	-	-	74	-17.45	133	121	H
3	* 5.35	27.04	RMS	34.5	-17.1	0	44.44	54	-9.56	-	-	133	121	H
4	* 5.452	27.71	RMS	34.6	-16.9	0	45.41	54	-8.59	-	-	133	121	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

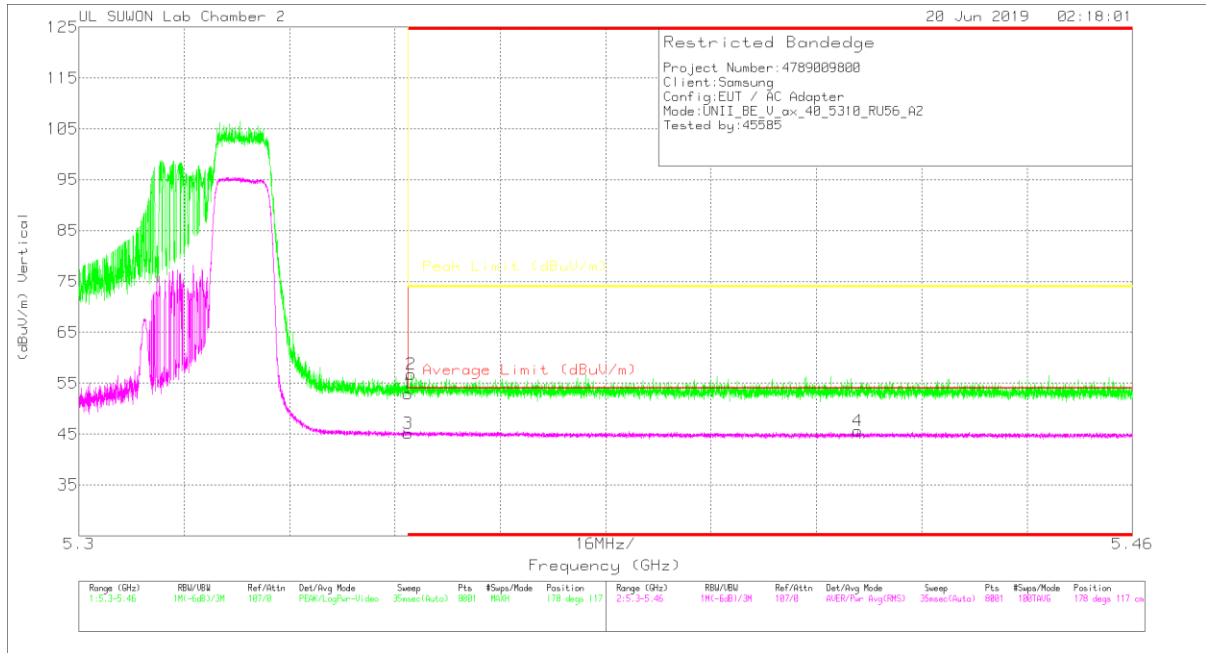

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00108724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 5.35	36.48	Pk	34.5	-18.1	0	52.88	-	-	74	-21.12	178	117	V
2	* 5.35	40.35	Pk	34.5	-18.1	0	56.75	-	-	74	-17.25	178	117	V
3	* 5.35	27.71	RMS	34.5	-17.1	0	45.11	54	-8.89	-	-	178	117	V
4	* 5.418	28.13	RMS	34.5	-17	0	45.63	54	-8.37	-	-	178	117	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

52T RU mode (ANT_1 / HE80 / RU offset 52)

HORIZONTAL PEAK AND AVERAGE PLOT

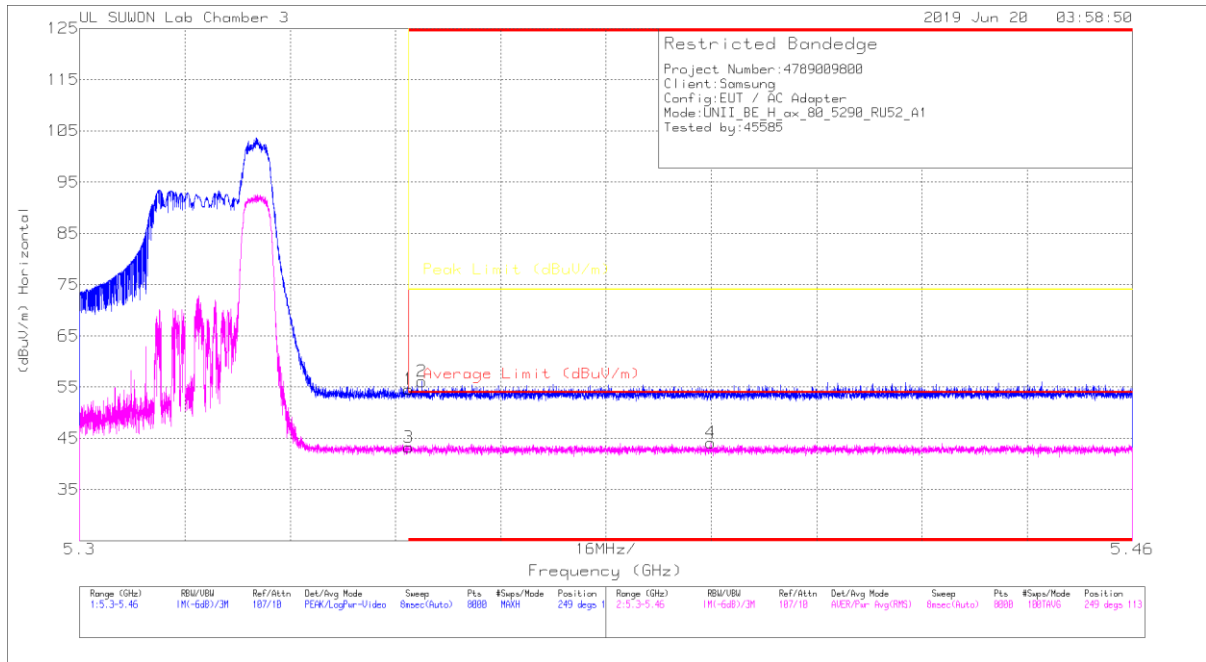

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205999	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	38.58	Pk	34.7	-18.7	0	54.58	-	-	74	-19.42	249	113	H
2	* 5.352	40.1	Pk	34.7	-18.7	0	56.1	-	-	74	-17.9	249	113	H
3	* 5.35	27.65	RMS	34.7	-19.1	0	43.25	54	-10.75	-	-	249	113	H
4	* 5.396	28.46	RMS	34.7	-19	0	44.16	54	-9.84	-	-	249	113	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

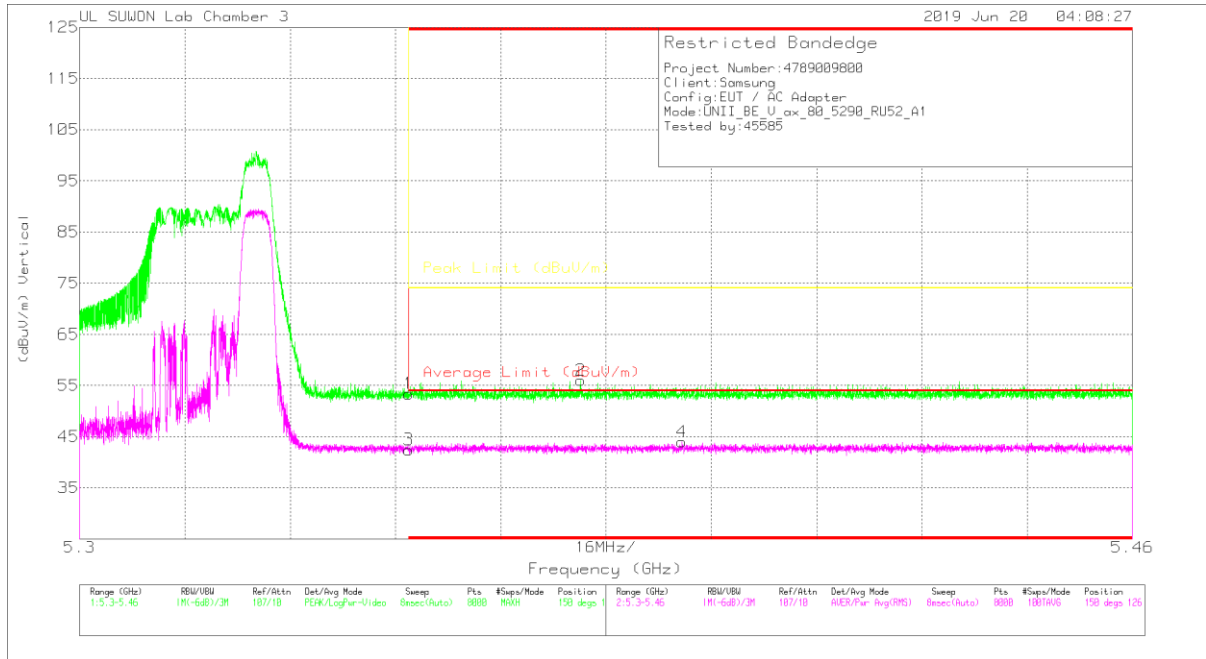

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	37.39	Pk		34.7	-18.7	0	53.39	-	74	-20.61	150	126	V
2	* 5.376	39.99	Pk		34.7	-18.7	0	55.99	-	74	-18.01	150	126	V
3	* 5.35	26.85	RMS		34.7	-19.1	0	42.45	54	-11.55	-	150	126	V
4	* 5.392	28.41	RMS		34.7	-19.1	0	44.01	-9.99	-	-	150	126	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

52T RU mode (ANT_2 / HE20 / RU offset 40)

HORIZONTAL PEAK AND AVERAGE PLOT

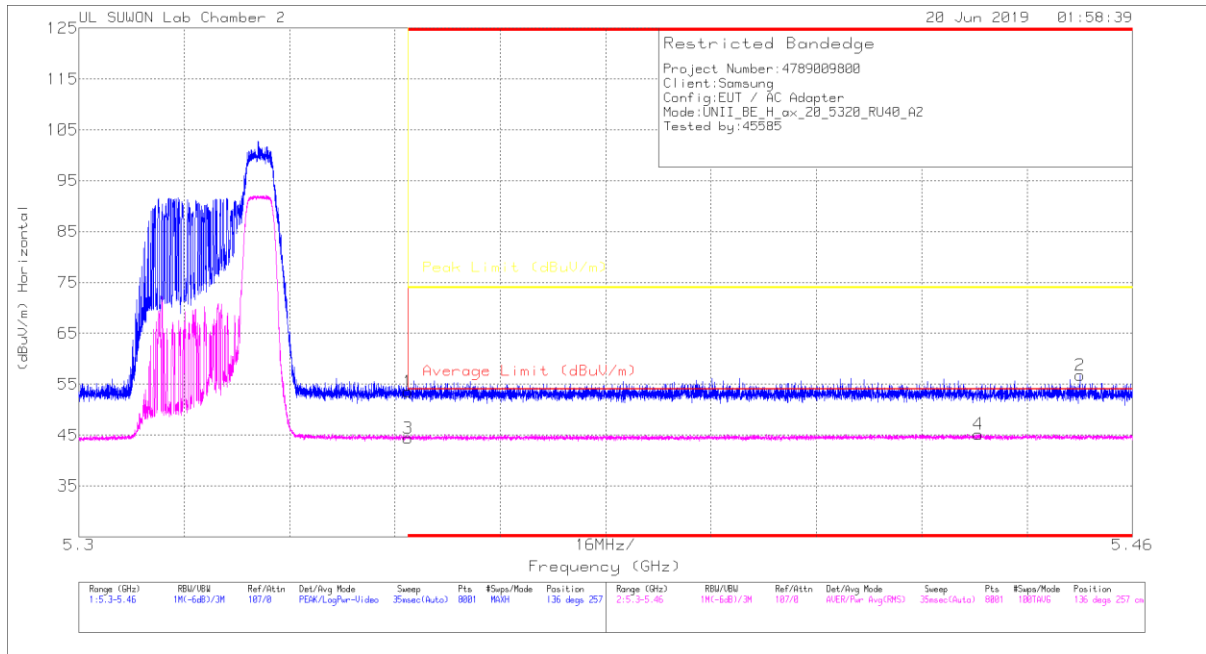

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 5.35	37.14	Pk	34.5	-18.1	0	53.54	-	-	74	-20.46	136	257	H
2	* 5.452	40.31	Pk	34.6	-18.2	0	56.71	-	-	74	-17.29	136	257	H
3	* 5.35	26.94	RMS	34.5	-17.1	0	44.34	54	-9.66	-	-	136	257	H
4	* 5.437	27.69	RMS	34.5	-17	0	45.19	54	-8.81	-	-	136	257	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

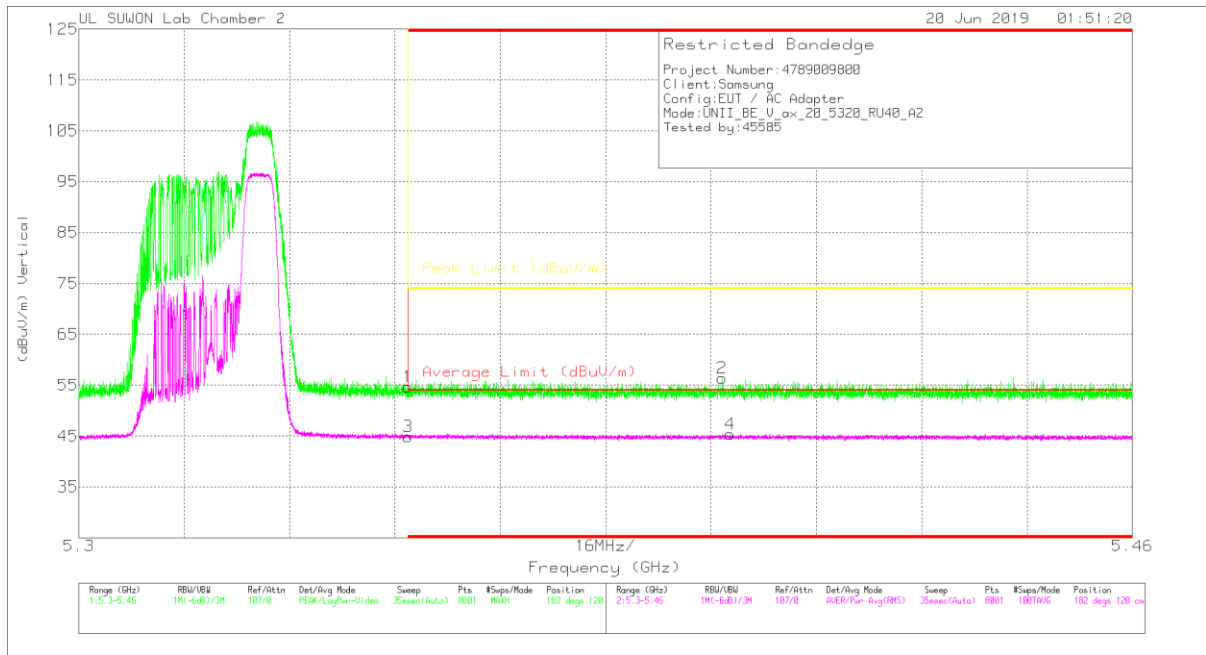

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00108724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 5.35	38.24	Pk	34.5	-18.1	0	54.64	-	-	74	-19.36	182	120	V
2	* 5.398	40.02	Pk	34.5	-18.1	0	56.42	-	-	74	-17.58	182	120	V
3	* 5.35	27.5	RMS	34.5	-17.1	0	44.9	54	-9.1	-	-	182	120	V
4	* 5.399	27.93	RMS	34.5	-17	0	45.43	54	-8.57	-	-	182	120	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

26T RU mode (ANT_1 / HE20 / RU offset 8)

HORIZONTAL PEAK AND AVERAGE PLOT

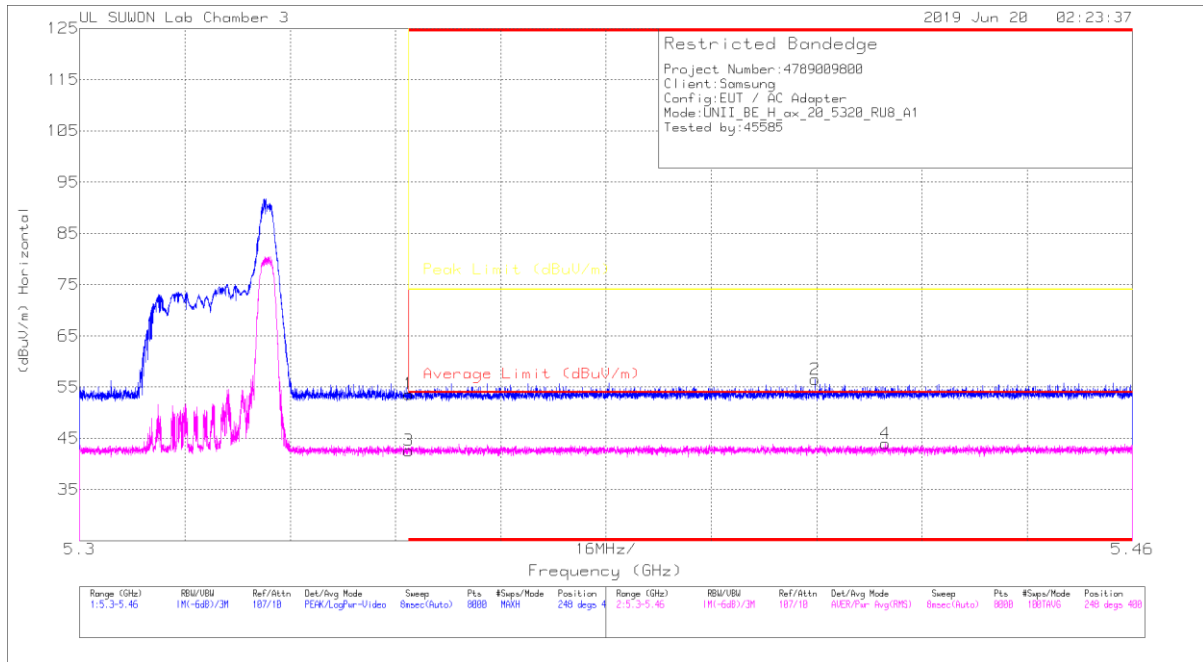

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	37.63	Pk	34.7	-18.7	0	53.63	-	-	74	-20.37	248	400	H
2	* 5.412	40.42	Pk	34.7	-18.6	0	56.52	-	-	74	-17.48	248	400	H
3	* 5.35	27	RMS	34.7	-19.1	0	42.6	54	-11.4	-	-	248	400	H
4	* 5.422	28.27	RMS	34.7	-19	0	43.97	54	-10.03	-	-	248	400	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

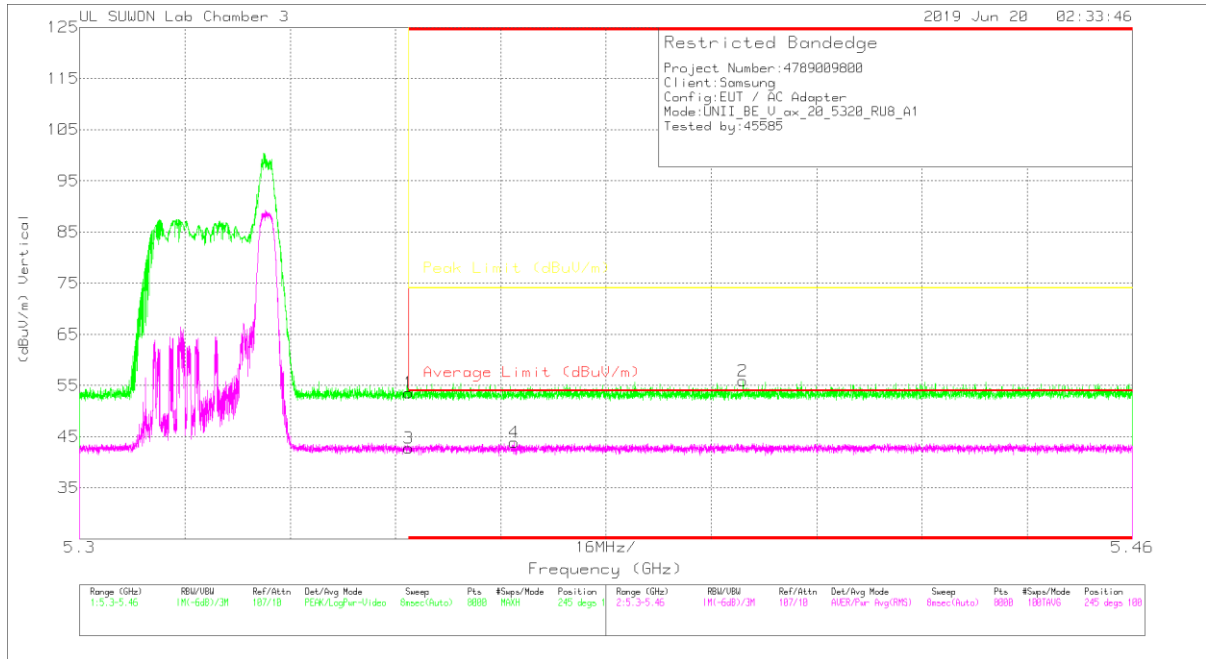

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	37.55	Pk		-18.7	0	53.55	-	-	74	-20.45	245	100	V
2	* 5.401	39.78	Pk		-18.6	0	55.88	-	-	74	-18.12	245	100	V
3	* 5.35	27.17	RMS		-19.1	0	42.77	54	-11.23	-	-	245	100	V
4	* 5.366	28.27	RMS		-19.1	0	43.87	54	-10.13	-	-	245	100	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

26T RU mode (ANT_2 / HE40 / RU offset 17)

HORIZONTAL PEAK AND AVERAGE PLOT

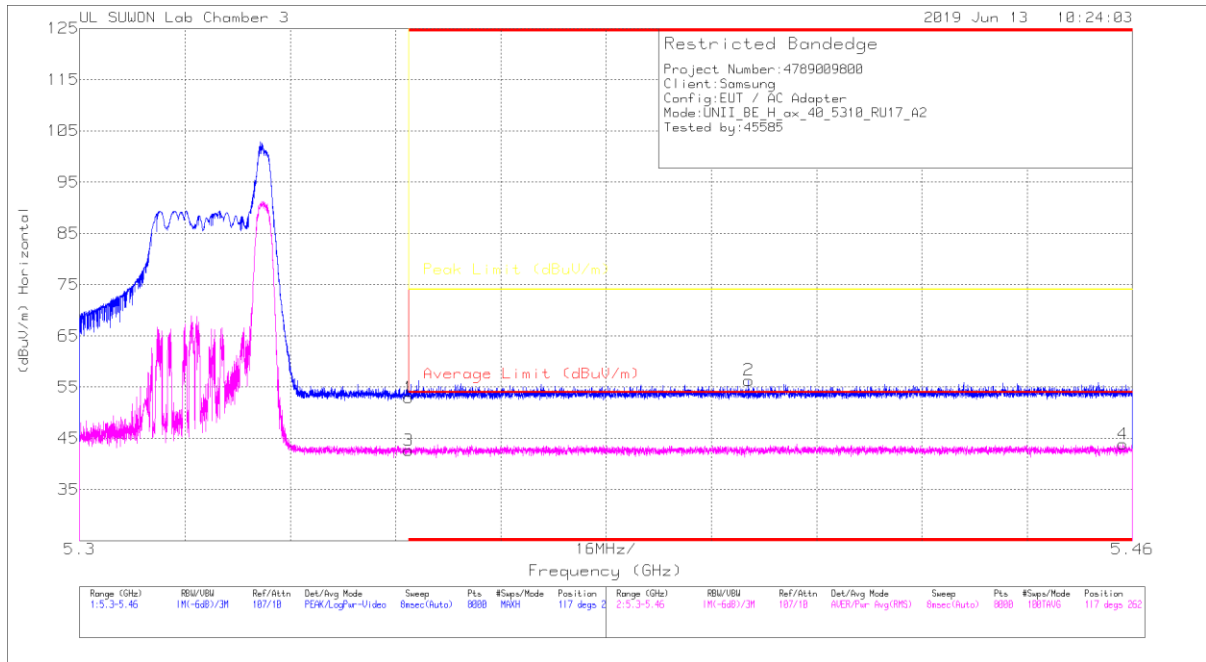

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	36.96	Pk		-18.7	0	52.96	-	-	74	-21.04	117	262	H
2	* 5.402	40.23	Pk		-18.6	0	56.33	-	-	74	-17.67	117	262	H
3	* 5.35	27.02	RMS		-19.1	0	42.62	54	-11.38	-	-	117	262	H
4	* 5.459	28.15	RMS		-19	0	43.85	54	-10.15	-	-	117	262	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

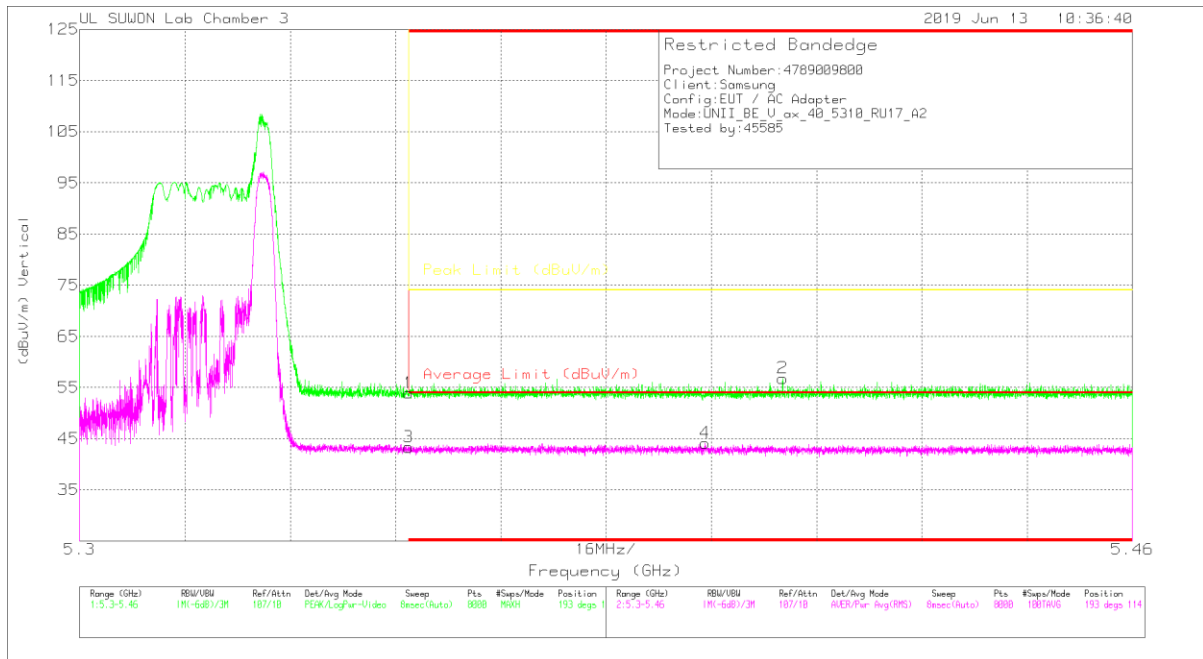

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	37.94	Pk	34.7	-18.7	0	53.94	-	-	74	-20.06	193	114	V
2	* 5.407	40.72	Pk	34.7	-18.6	0	56.82	-	-	74	-17.18	193	114	V
3	* 5.35	27.73	RMS	34.7	-19.1	0	43.33	54	-10.67	-	-	193	114	V
4	* 5.395	28.45	RMS	34.7	-19	0	44.15	54	-9.85	-	-	193	114	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection


HARMONICS AND SPURIOUS EMISSIONS

HE20 SU mode (ANT_1)

LOW CHANNEL HORIZONTAL

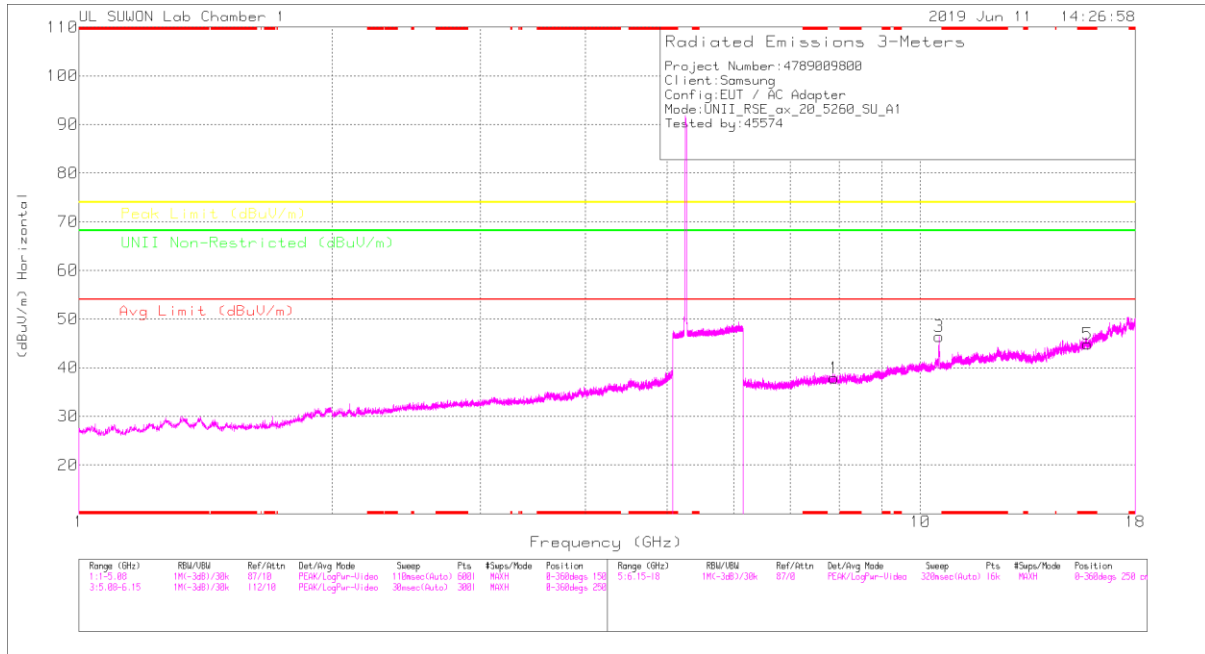

LOW CHANNEL VERTICAL

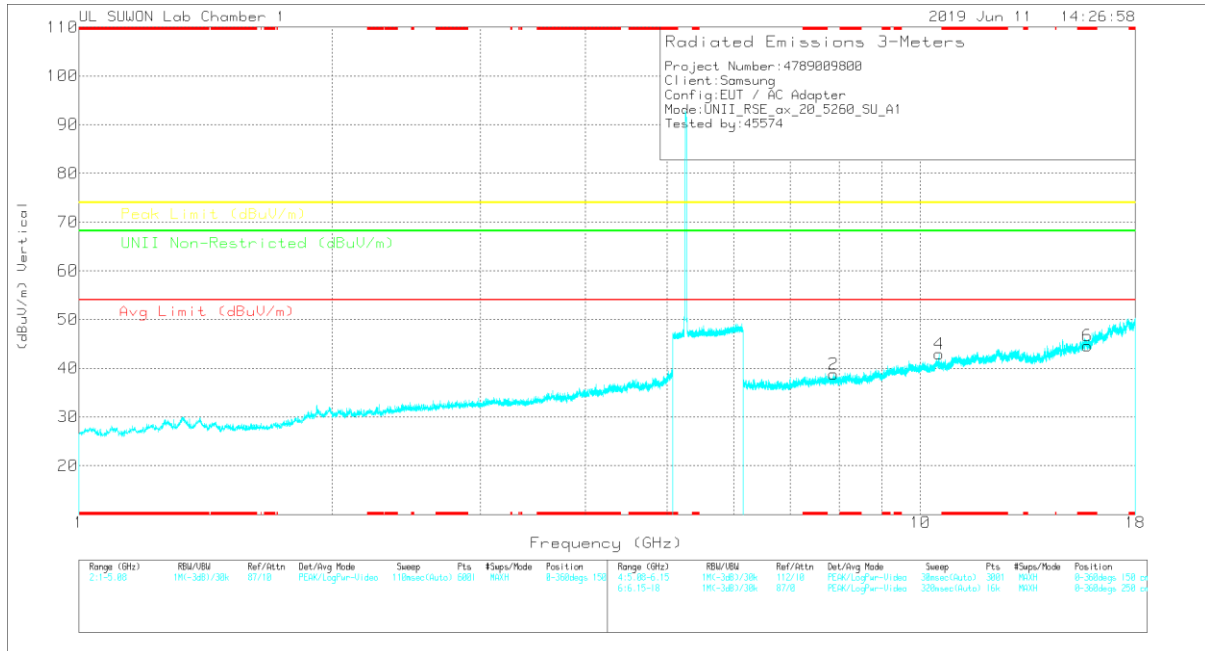

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HRP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unli Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	7.89184	28.39	PK	36	-26.5	0	37.89	-	-	-	-	68.2	-30.31	0-360	250	H
3	10.51571	31.26	PK	37.7	-22.5	0	46.46	-	-	-	-	68.2	-21.74	0-360	250	H
5	* 15.78049	25.53	PK	40.5	-21.2	0	44.83	-	-	74	-29.17	-	-	0-360	250	H
2	7.88888	29.27	PK	36	-26.5	0	38.77	-	-	-	-	68.2	-29.43	0-360	250	V
4	10.51942	27.8	PK	37.7	-22.6	0	42.9	-	-	-	-	68.2	-25.3	0-360	150	V
6	* 15.78049	25.28	PK	40.5	-21.2	0	44.58	-	-	74	-29.42	-	-	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HRP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unli Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
10.52006	44.35	PK-U	37.7	-22.6	0	59.45	-	-	-	-	68.2	-8.75	142	248	H
10.5202	40.48	PK-U	37.7	-22.6	0	55.58	-	-	-	-	68.2	-12.62	172	174	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

MID CHANNEL HORIZONTAL

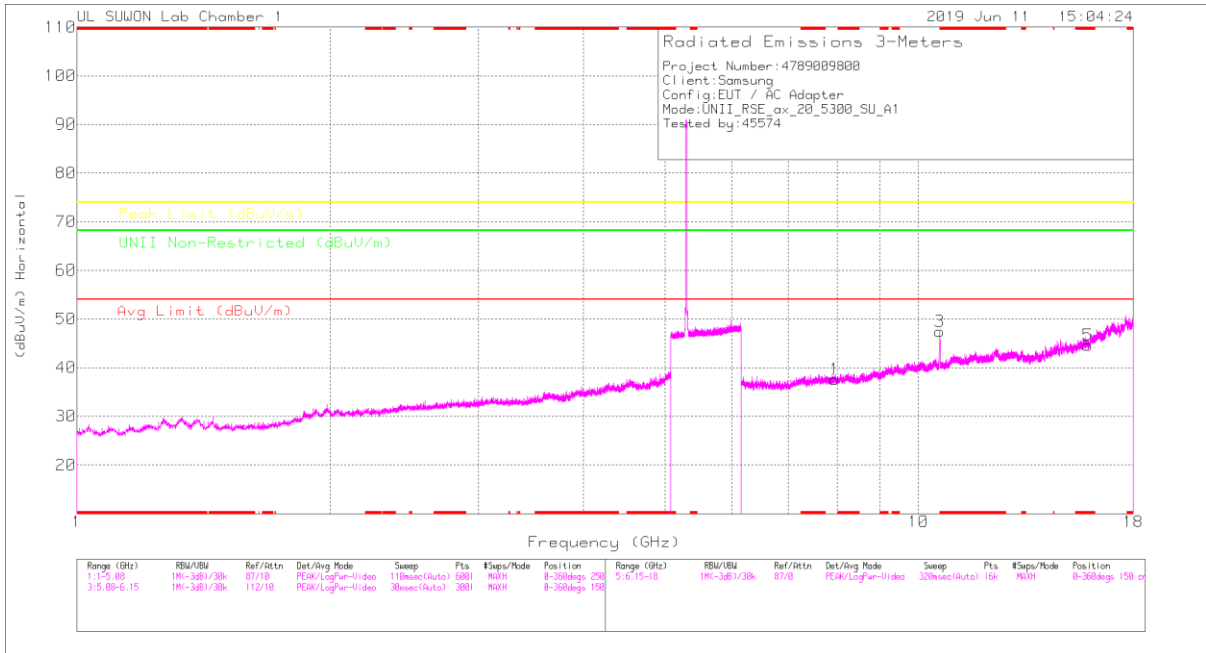

MID CHANNEL VERTICAL

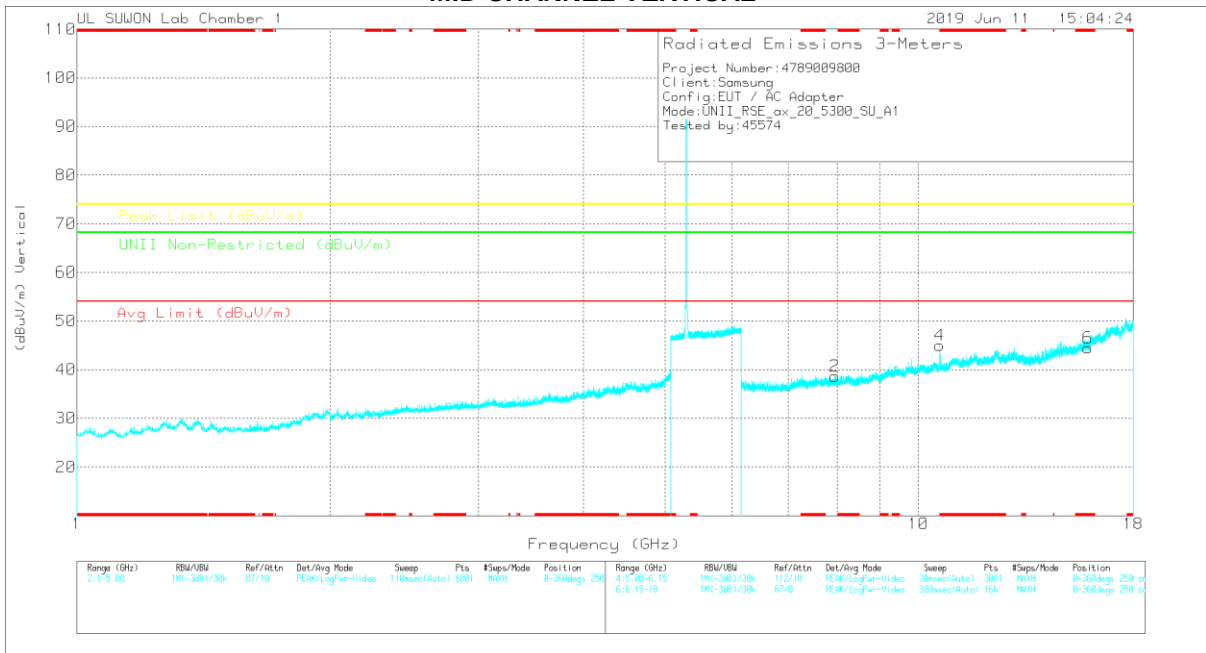

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	7.95035	27.83	PK	36	-26.2	0	37.63	-	-	-	-	68.2	-30.57	0-360	250	H
3	10.5994	31.9	PK	37.8	-22.3	0	47.4	-	-	-	-	68.2	-20.8	0-360	250	H
5	* 15.90046	25.11	PK	40.6	-21.1	0	44.61	-	-	74	-29.39	-	-	0-360	150	H
2	7.95109	28.83	PK	36	-26.2	0	38.63	-	-	-	-	68.2	-29.57	0-360	250	V
4	* 10.6031	29.46	PK	37.8	-22.3	0	44.96	-	-	74	-29.04	-	-	0-360	150	V
6	* 15.90046	24.95	PK	40.6	-21.1	0	44.45	-	-	74	-29.55	-	-	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
* 11.5915	35.95	PK-U	38.6	-22.4	0	52.15	-	-	74	-21.85	-	-	140	238	H
* 11.62225	23.94	ADR	38.6	-21.9	0	40.64	54	-13.36	-	-	-	-	140	238	H
* 11.62633	36.1	PK-U	38.7	-21.9	0	52.9	-	-	74	-21.1	-	-	290	105	V
* 11.61918	23.99	ADR	38.6	-22	0	40.59	54	-13.41	-	-	-	-	290	105	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL HORIZONTAL

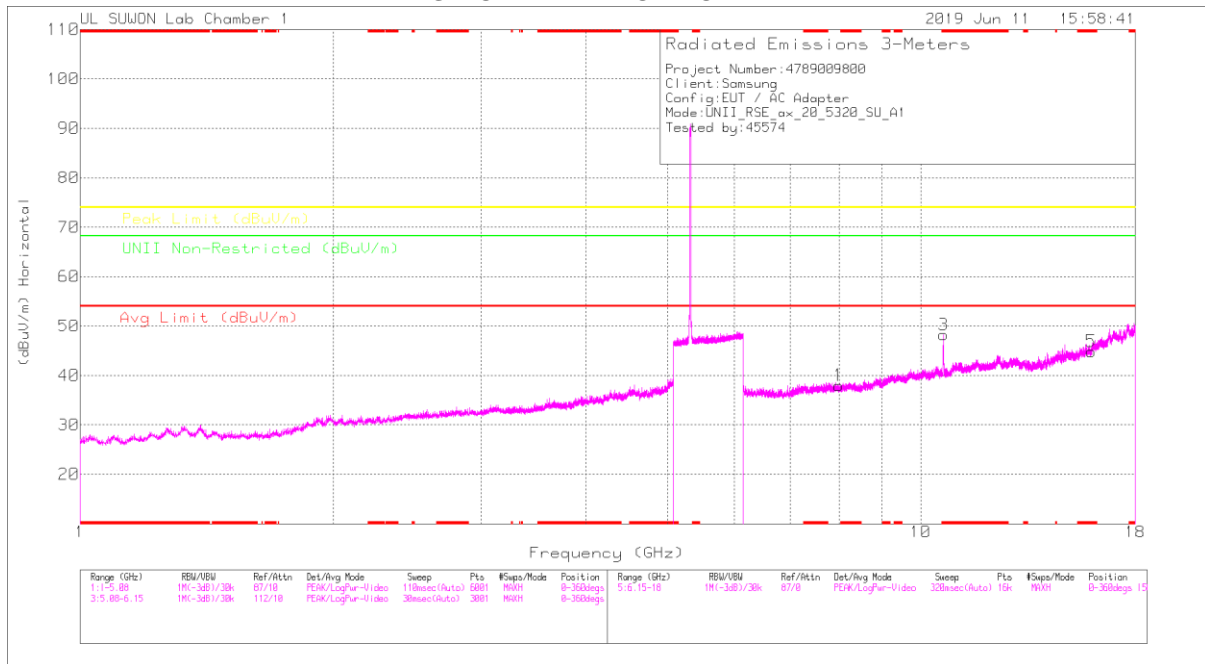

HIGH CHANNEL VERTICAL

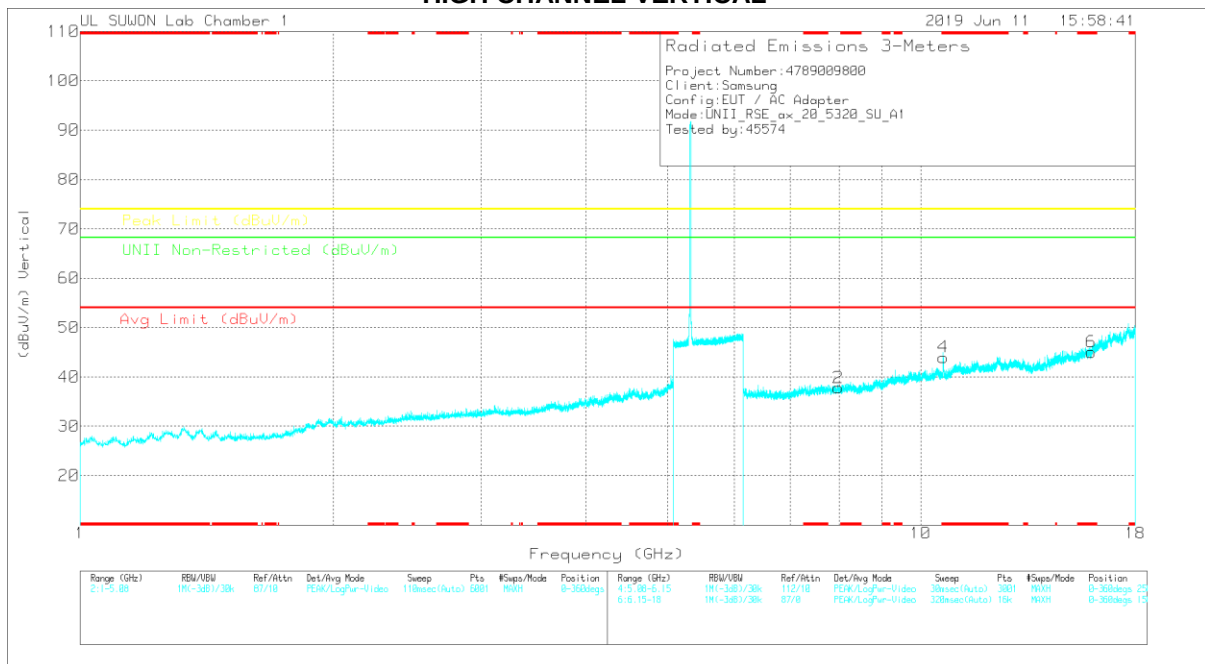

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unli Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.98367	28.29	PK	36	-26.3	0	37.99	-	-	-	-	68.2	-30.21	0-360	150	H
3	* 10.64309	32.55	PK	37.8	-22.1	0	48.25	-	-	74	-25.75	-	-	0-360	250	H
5	* 15.96045	24.95	PK	40.7	-20.8	0	44.85	-	-	74	-29.15	-	-	0-360	250	H
2	7.97997	28.1	PK	36	-26.3	0	37.8	-	-	-	-	68.2	-30.4	0-360	250	V
4	* 10.63965	28.29	PK	37.8	-22.1	0	43.99	-	-	74	-30.01	-	-	0-360	150	V
6	* 15.96045	25.12	PK	40.7	-20.8	0	45.02	-	-	74	-28.98	-	-	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unli Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 10.64543	46.34	PK-U	37.8	-22.1	0	62.04	-	-	74	-11.96	-	-	159	242	H
* 10.64087	31.36	ADR	37.8	-22.1	0	47.06	54	-6.94	-	-	-	-	159	242	H
* 10.64543	45.9	PK-U	37.8	-22.1	0	61.6	-	-	74	-12.4	-	-	145	237	H
* 10.64015	31.31	ADR	37.8	-22.1	0	47.01	54	-6.99	-	-	-	-	145	237	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

HE20 SU mode (ANT_2)

LOW CHANNEL HORIZONTAL

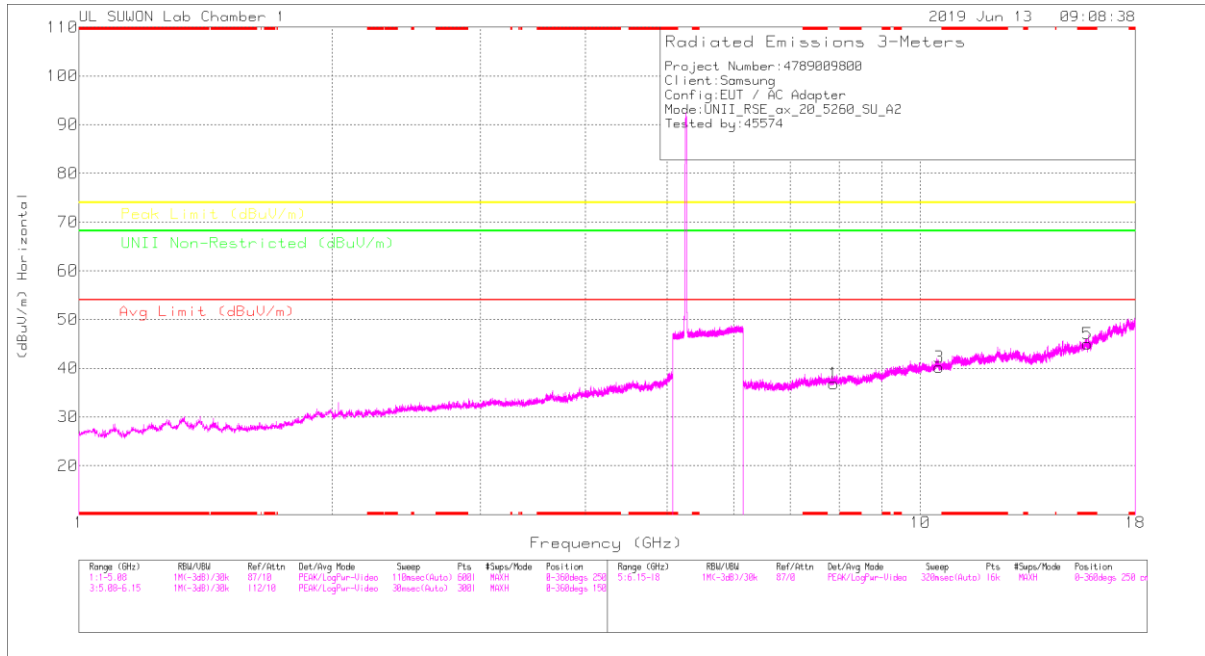

LOW CHANNEL VERTICAL

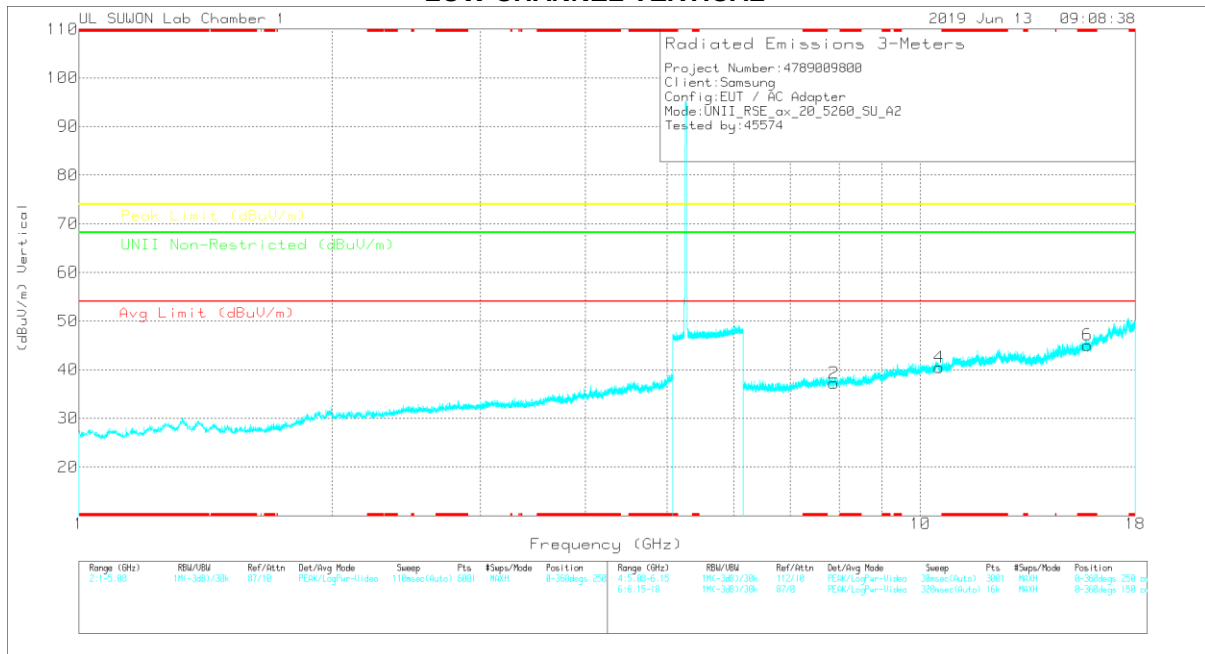

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HRP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.89036	27.36	PK	36	-26.5	0	36.86	-	-	-	-	68.2	-31.34	0-360	250	H
3	10.51942	25.11	PK	37.7	-22.6	0	40.21	-	-	-	-	68.2	-27.99	0-360	250	H
5	* 15.78197	25.67	PK	40.5	-21.2	0	44.97	-	-	74	-29.03	-	-	0-360	250	H
2	7.89036	27.67	PK	36	-26.5	0	37.17	-	-	-	-	68.2	-31.03	0-360	150	V
4	10.5209	25.3	PK	37.7	-22.6	0	40.4	-	-	-	-	68.2	-27.8	0-360	250	V
6	* 15.78197	25.75	PK	40.5	-21.2	0	45.05	-	-	74	-28.95	-	-	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

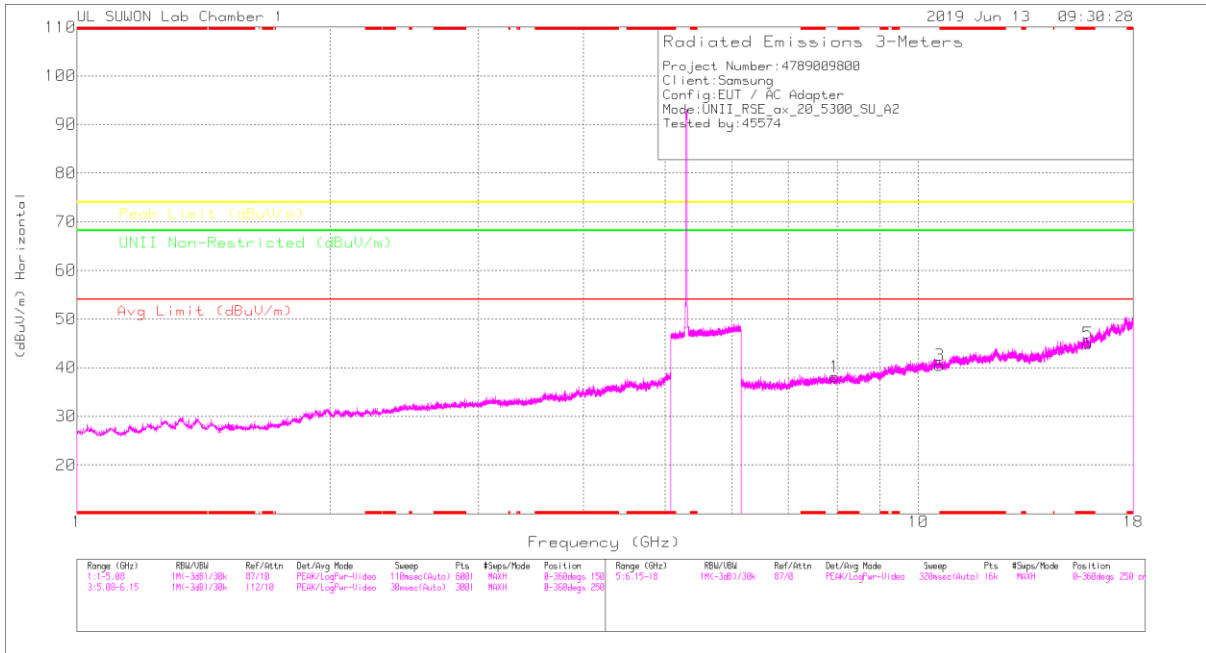

MID CHANNEL VERTICAL

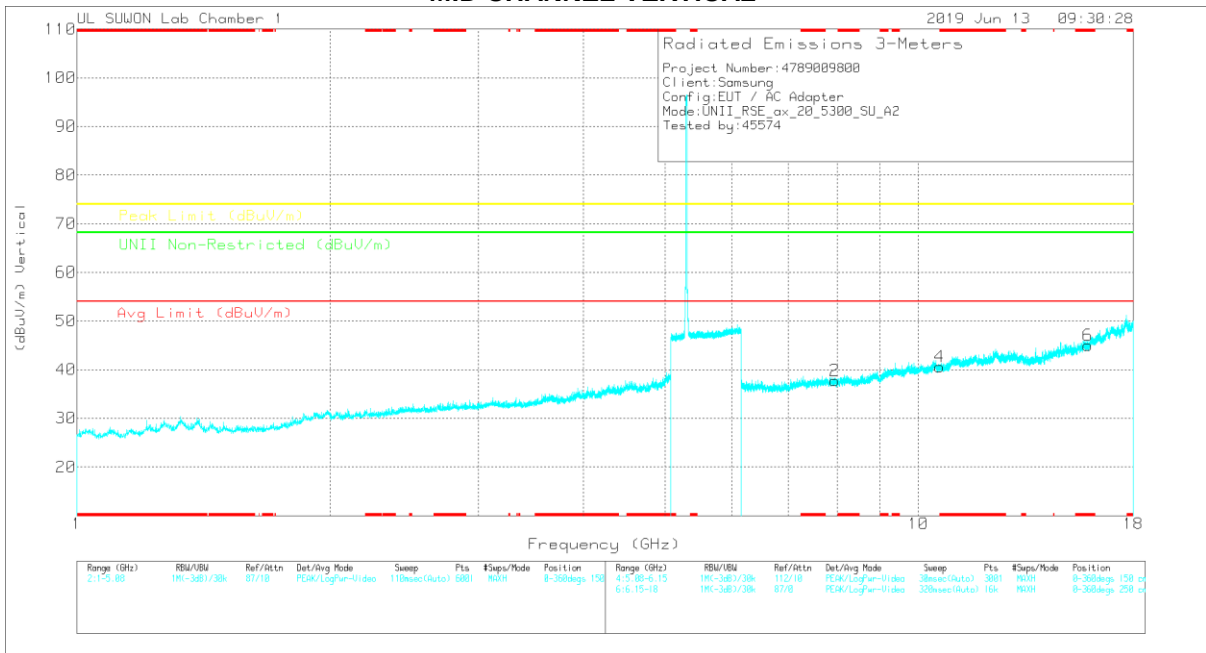

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	7.94887	28.37	PK	36	-26.2	0	38.17	-	-	-	-	68.2	-30.03	0-360	150	H
3	*10.60088	24.97	PK	37.8	-22.3	0	40.47	-	-	74	-33.53	-	-	0-360	150	H
5	*15.9012	25.45	PK	40.6	-21.1	0	44.95	-	-	74	-29.05	-	-	0-360	250	H
2	7.94961	27.93	PK	36	-26.2	0	37.73	-	-	-	-	68.2	-30.47	0-360	250	V
4	*10.60088	25.14	PK	37.8	-22.3	0	40.64	-	-	74	-33.36	-	-	0-360	150	V
6	*15.90046	25.54	PK	40.6	-21.1	0	45.04	-	-	74	-28.96	-	-	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

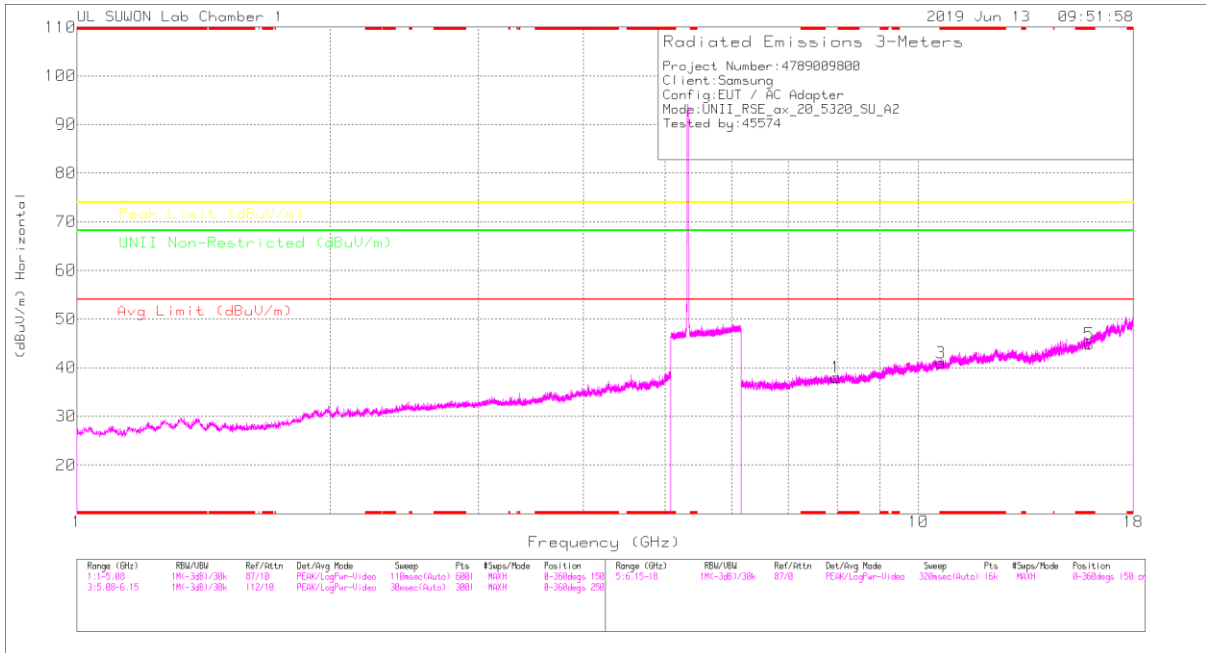

HIGH CHANNEL VERTICAL

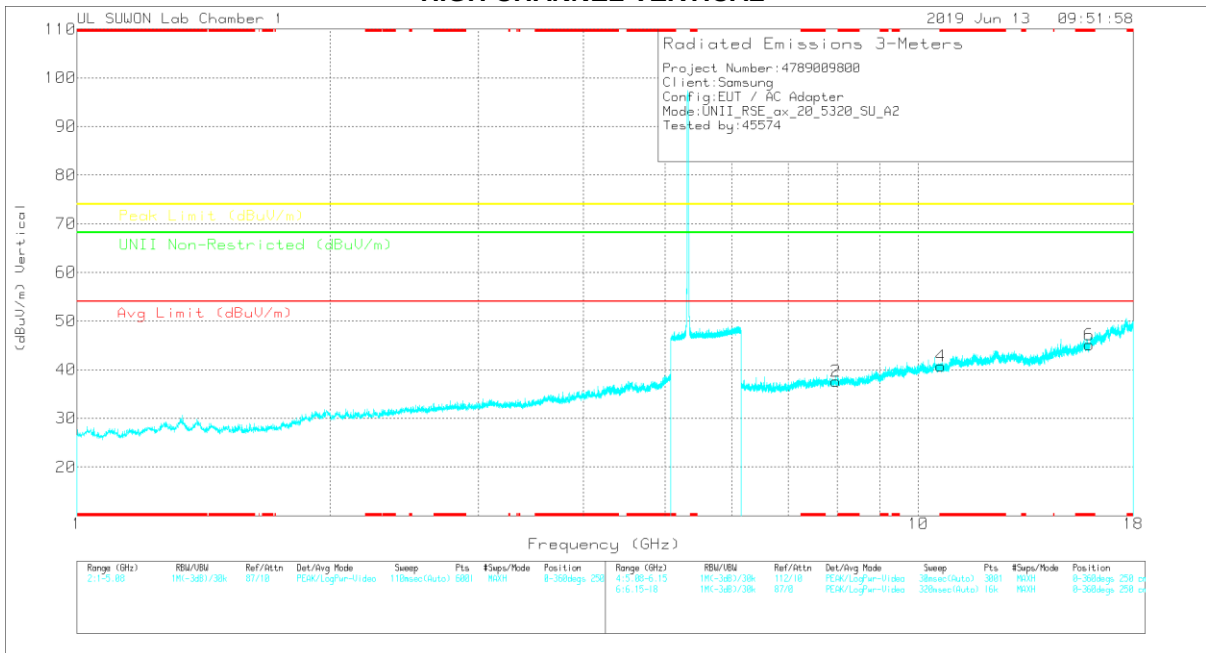

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.98293	28.34	PK	36	-26.3	0	38.04	-	-	-	-	68.2	-30.16	0-360	150	H
3	* 10.63939	25.33	PK	37.8	-22.1	0	41.03	-	-	74	-32.97	-	-	0-360	150	H
5	* 15.96045	25.01	PK	40.7	-20.8	0	44.91	-	-	74	-29.09	-	-	0-360	250	H
2	7.98219	27.97	PK	36	-26.3	0	37.67	-	-	-	-	68.2	-30.53	0-360	250	V
4	* 10.63939	24.97	PK	37.8	-22.1	0	40.67	-	-	74	-33.33	-	-	0-360	250	V
6	* 15.96119	25.17	PK	40.7	-20.8	0	45.07	-	-	74	-28.93	-	-	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HE40 SU mode (ANT_1)

LOW CHANNEL HORIZONTAL

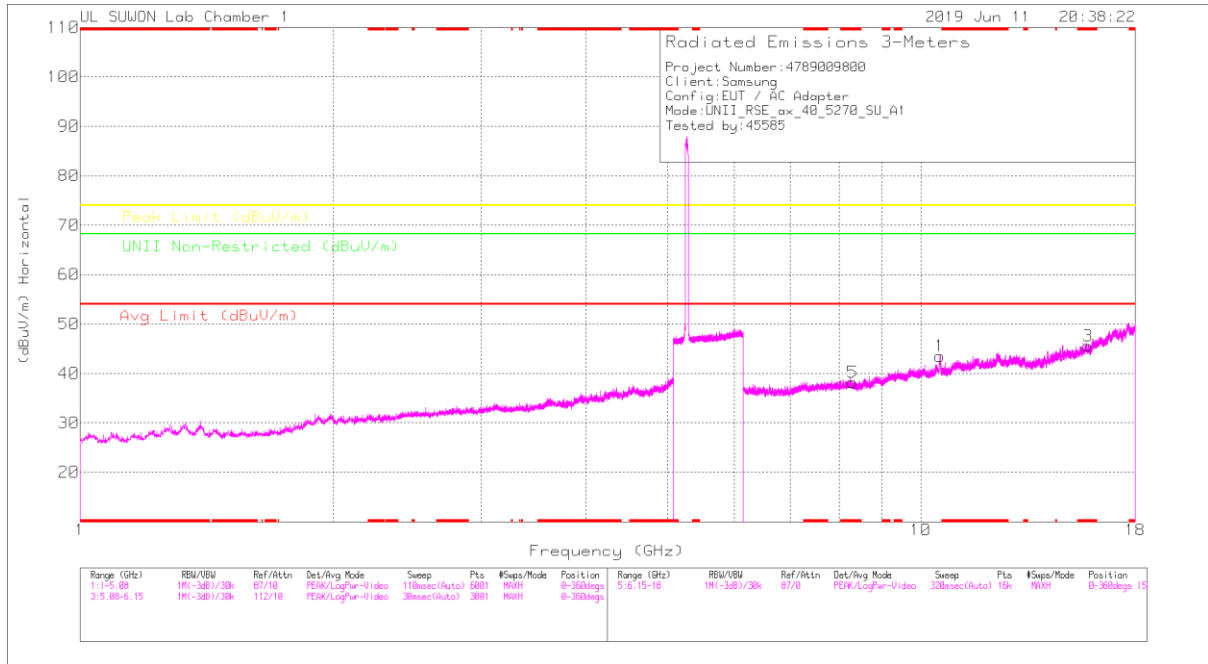

LOW CHANNEL VERTICAL

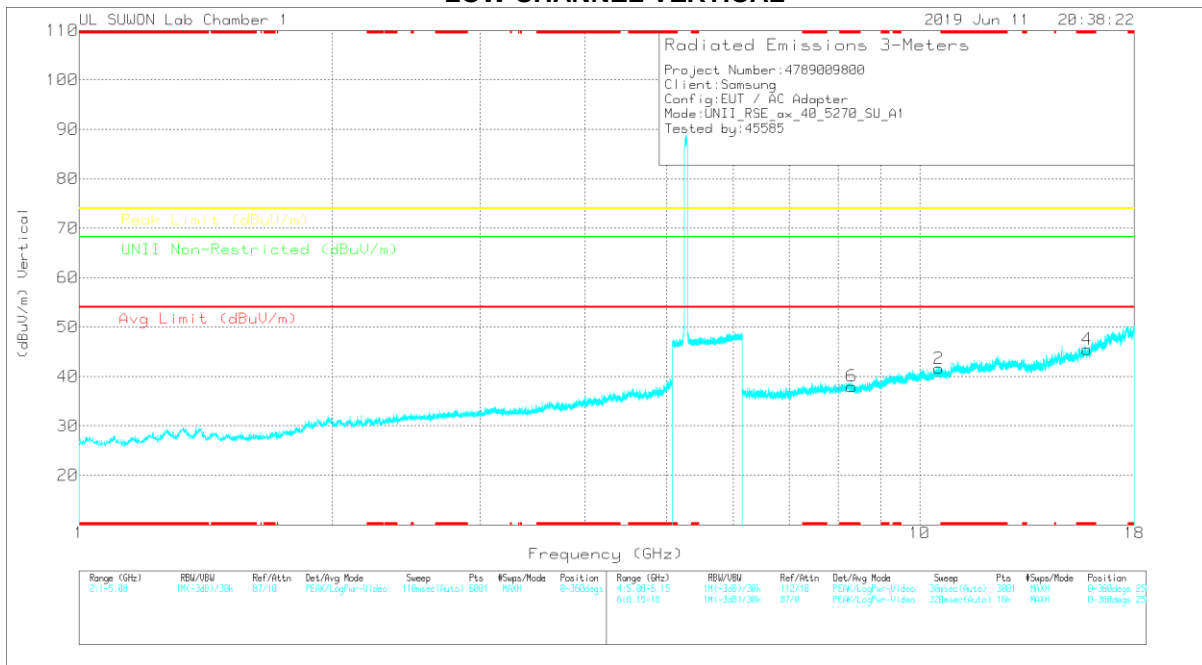

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unli Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	10.54089	28.49	PK	37.8	-22.8	0	43.49	-	-	-	-	68.2	-24.71	0-360	250	H
3	* 15.81308	26.17	PK	40.5	-21.1	0	45.57	-	-	74	-28.43	-	-	0-360	250	H
5	* 8.30138	27.07	PK	36.4	-25.3	0	38.17	-	-	74	-35.83	-	-	0-360	150	H
2	10.54089	26.61	PK	37.8	-22.8	0	41.61	-	-	-	-	68.2	-26.59	0-360	150	V
4	* 15.81308	26.08	PK	40.5	-21.1	0	45.48	-	-	74	-28.52	-	-	0-360	250	V
6	* 8.30286	26.9	PK	36.4	-25.3	0	38	-	-	74	-36	-	-	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unli Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
10.53904	40.99	PK-U	37.7	-22.8	0	55.89	-	-	-	-	68.2	-12.31	142	249	H
10.53728	38.9	PK-U	37.7	-22.8	0	53.8	-	-	-	-	68.2	-14.4	175	170	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

HIGH CHANNEL HORIZONTAL

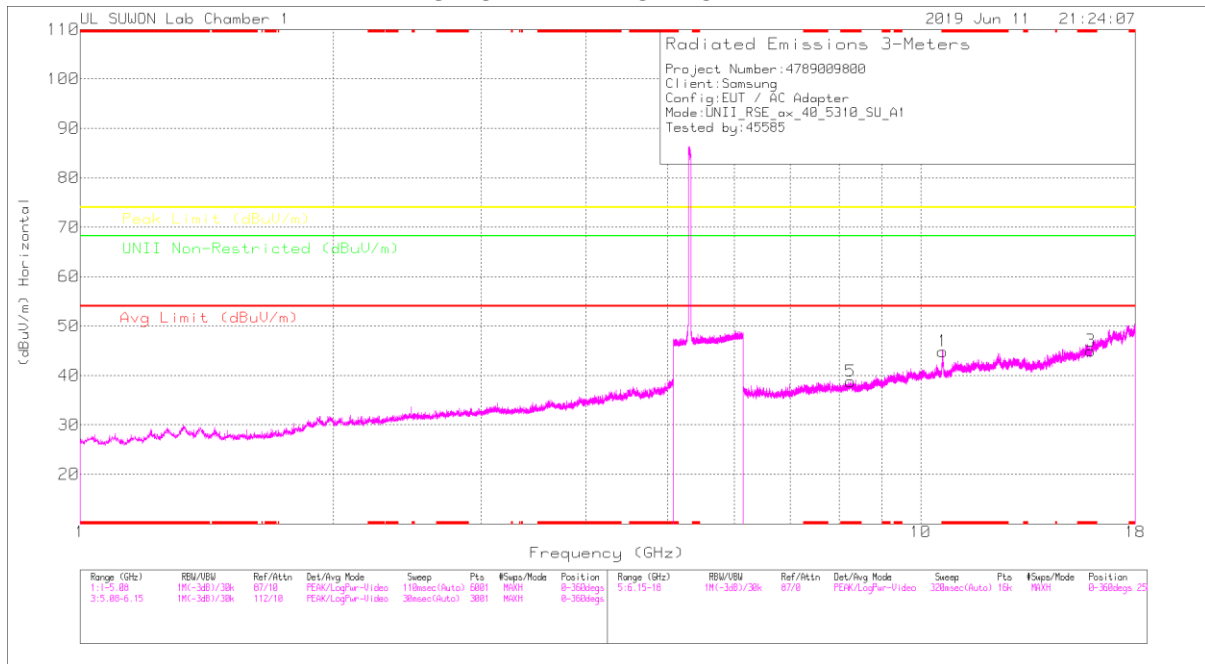

HIGH CHANNEL VERTICAL

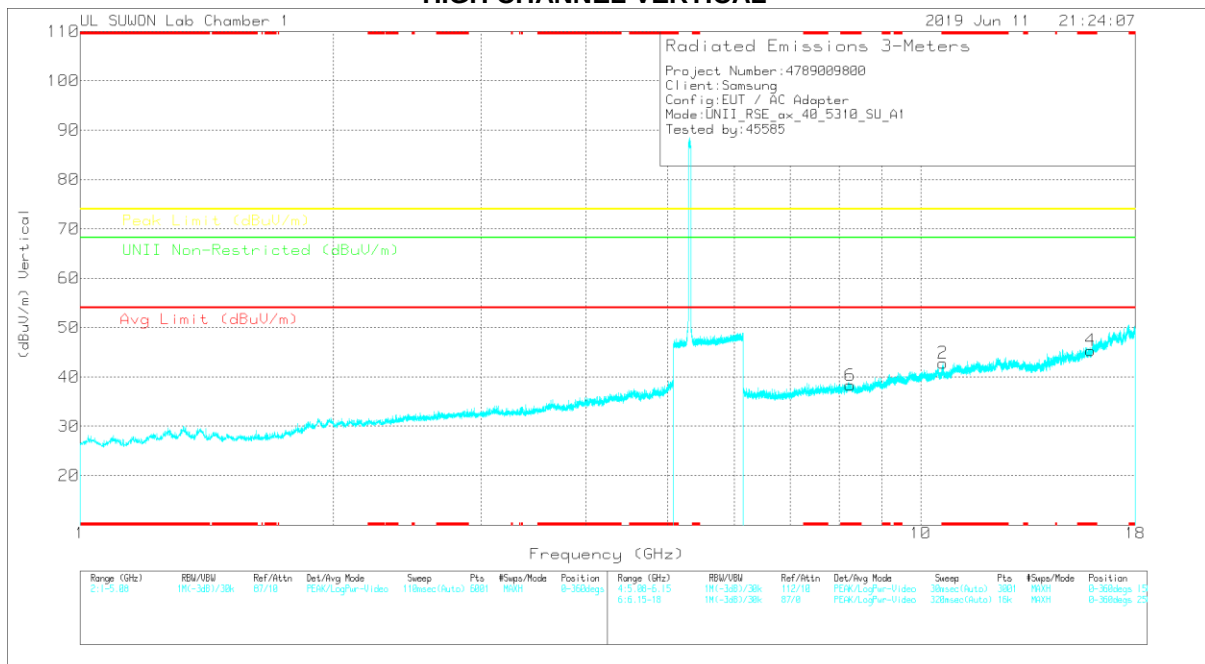

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 10.62088	29.27	PK	37.8	-22.2	0	44.87	-	-	74	-29.13	-	-	0-360	250	H
3	* 15.92861	25.48	PK	40.6	-21.1	0	44.98	-	-	74	-29.02	-	-	0-360	250	H
5	* 8.25473	27.69	PK	36.4	-25.3	0	38.79	-	-	74	-35.21	-	-	0-360	250	H
2	* 10.62458	27.13	PK	37.8	-22.1	0	42.83	-	-	74	-31.17	-	-	0-360	150	V
4	* 15.93009	25.77	PK	40.7	-21.1	0	45.37	-	-	74	-28.63	-	-	0-360	150	V
6	* 8.24584	27.32	PK	36.4	-25.4	0	38.32	-	-	74	-35.68	-	-	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
* 10.61908	41.6	PK-U	37.8	-22.2	0	57.2	-	-	74	-16.8	-	-	145	239	H
* 10.61982	28.01	ADR	37.8	-22.2	0	43.61	54	-10.39	-	-	-	-	145	239	H
* 10.6234	39.54	PK-U	37.8	-22.2	0	55.14	-	-	74	-18.86	-	-	177	171	V
* 10.6201	26.12	ADR	37.8	-22.2	0	41.72	54	-12.28	-	-	-	-	177	171	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

HE40 SU mode (ANT_2)

LOW CHANNEL HORIZONTAL

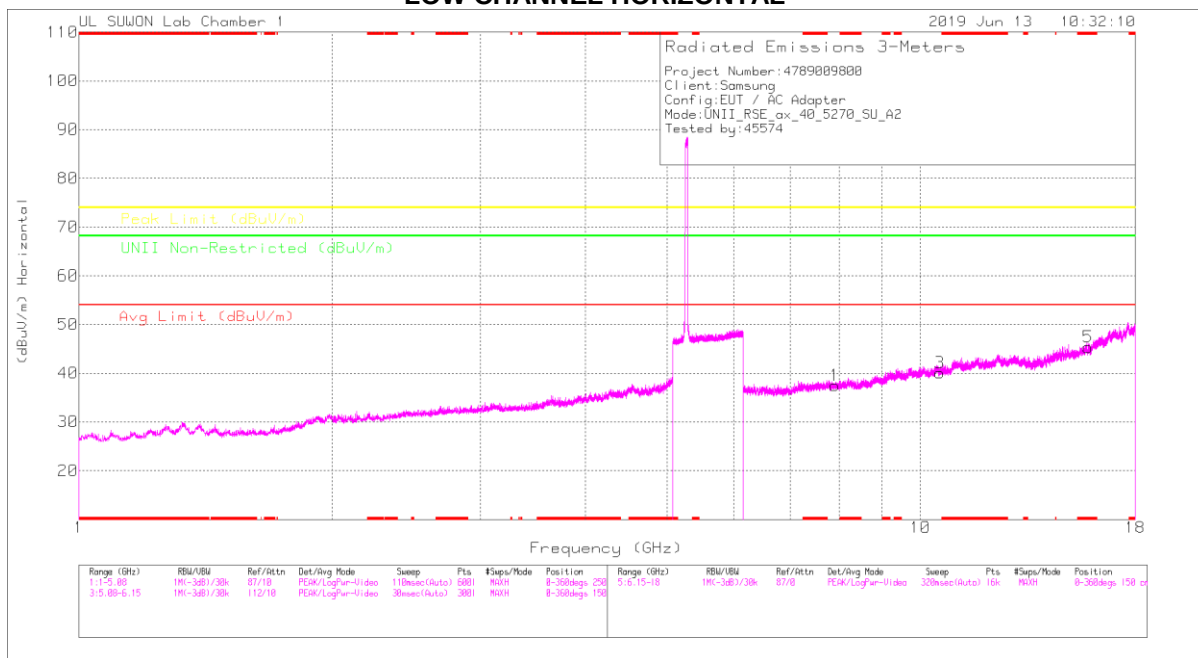

LOW CHANNEL VERTICAL

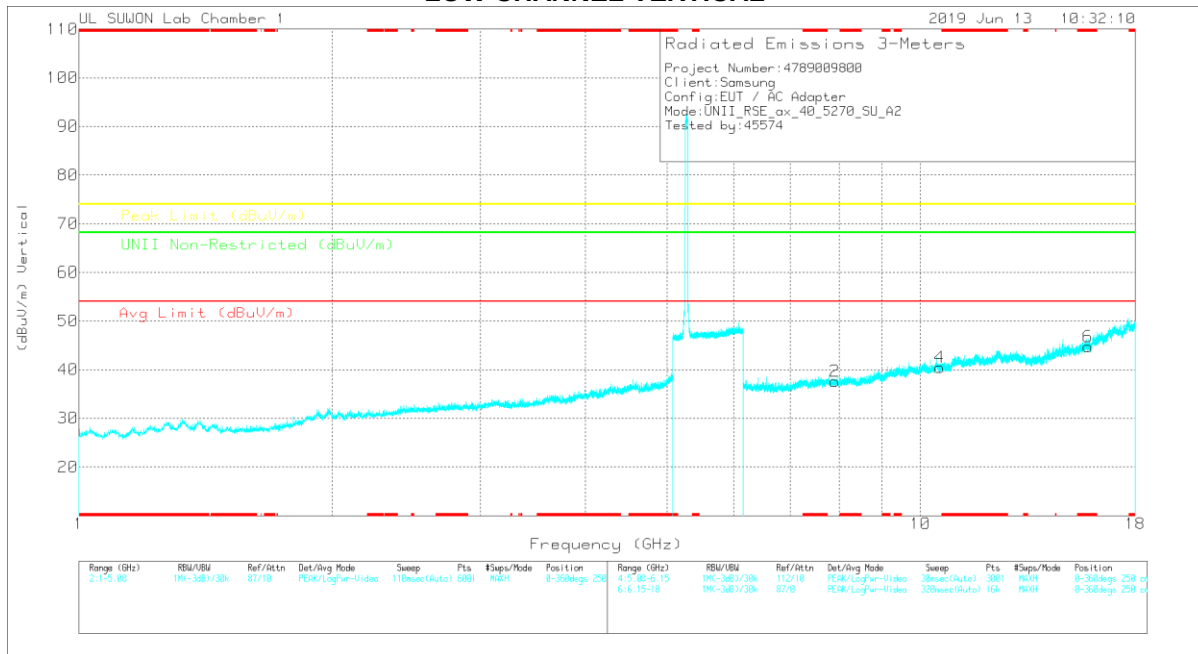

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00108717	6GHz_HRP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.90517	27.92	PK	36	-26.4	0	37.52	-	-	-	-	68.2	-30.68	0-360	150	H
3	10.54089	25.07	PK	37.8	-22.8	0	40.07	-	-	-	-	68.2	-28.13	0-360	150	H
5	* 15.81011	25.91	PK	40.5	-21.1	0	45.31	-	-	74	-28.69	-	-	0-360	250	H
2	7.90517	28.03	PK	36	-26.4	0	37.63	-	-	-	-	68.2	-30.57	0-360	250	V
4	10.54089	25.49	PK	37.8	-22.8	0	40.49	-	-	-	-	68.2	-27.71	0-360	150	V
6	* 15.81085	25.33	PK	40.5	-21.1	0	44.73	-	-	74	-29.27	-	-	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

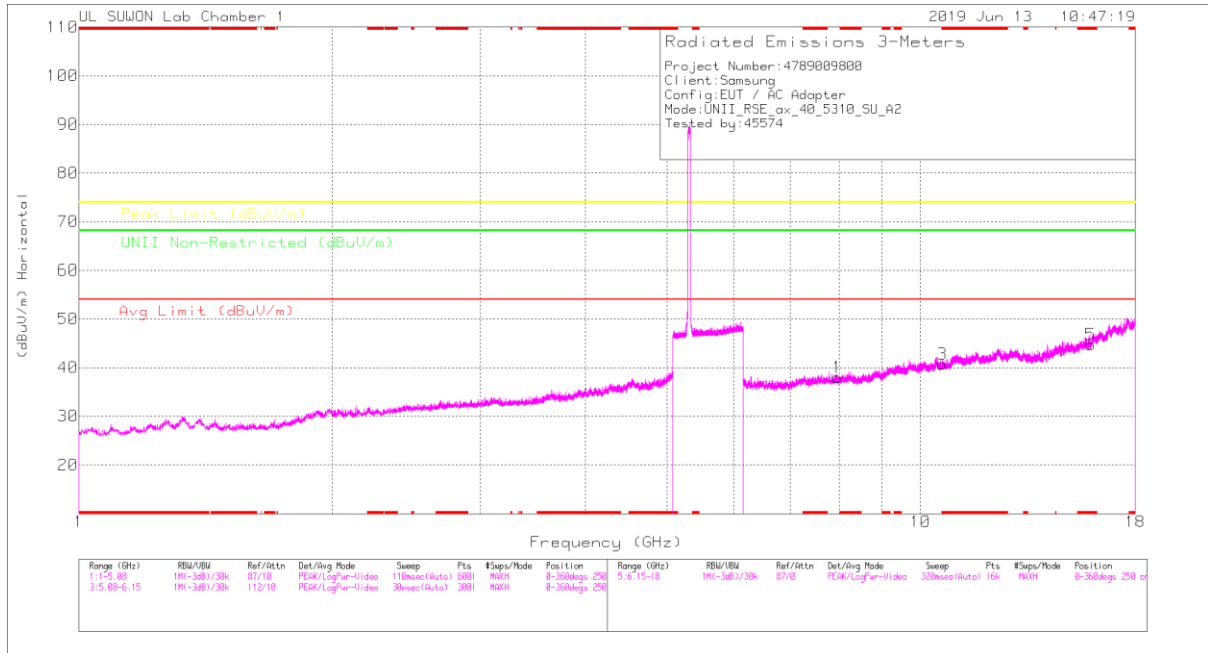

HIGH CHANNEL VERTICAL

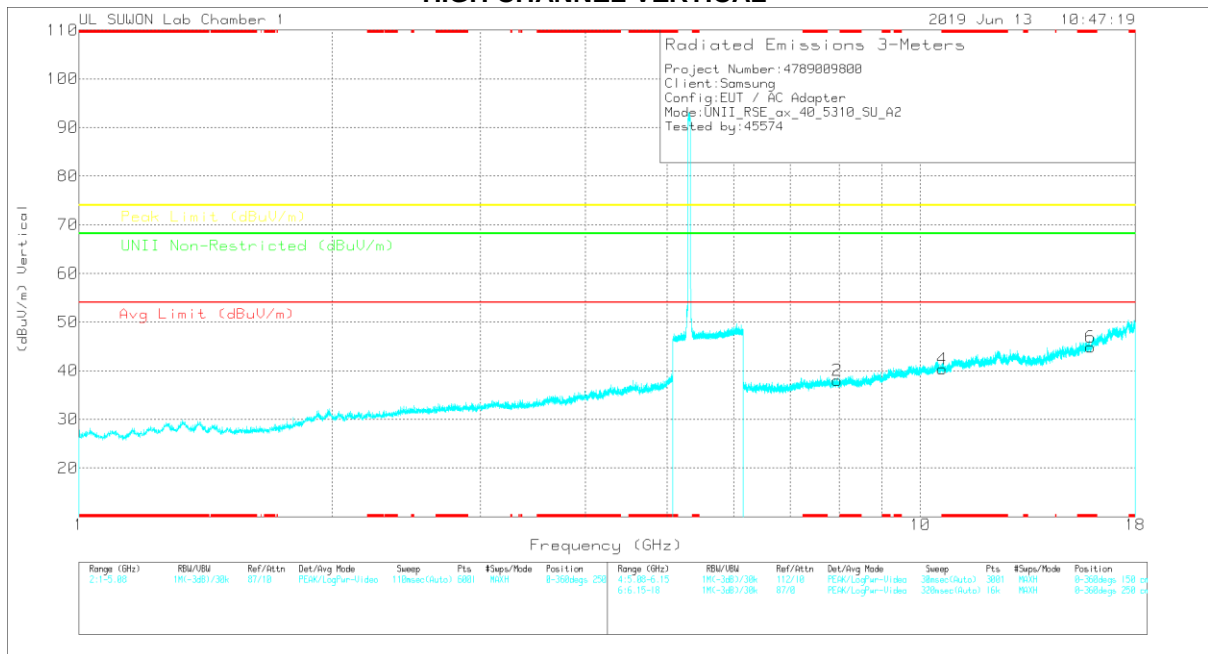

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00108717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.96442	28.19	PK	36	-26.2	0	37.99	-	-	-	-	68.2	-30.21	0-360	250	H
3	* 10.62088	25.14	PK	37.8	-22.2	0	40.74	-	-	74	-33.26	-	-	0-360	150	H
5	* 15.92861	25.17	PK	40.6	-21.1	0	44.67	-	-	74	-29.33	-	-	0-360	250	H
2	7.96442	28.22	PK	36	-26.2	0	38.02	-	-	-	-	68.2	-30.18	0-360	250	V
4	* 10.62088	24.74	PK	37.8	-22.2	0	40.34	-	-	74	-33.66	-	-	0-360	250	V
6	* 15.92861	25.37	PK	40.6	-21.1	0	44.87	-	-	74	-29.13	-	-	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HE80 SU mode (ANT_1)

MID CHANNEL HORIZONTAL

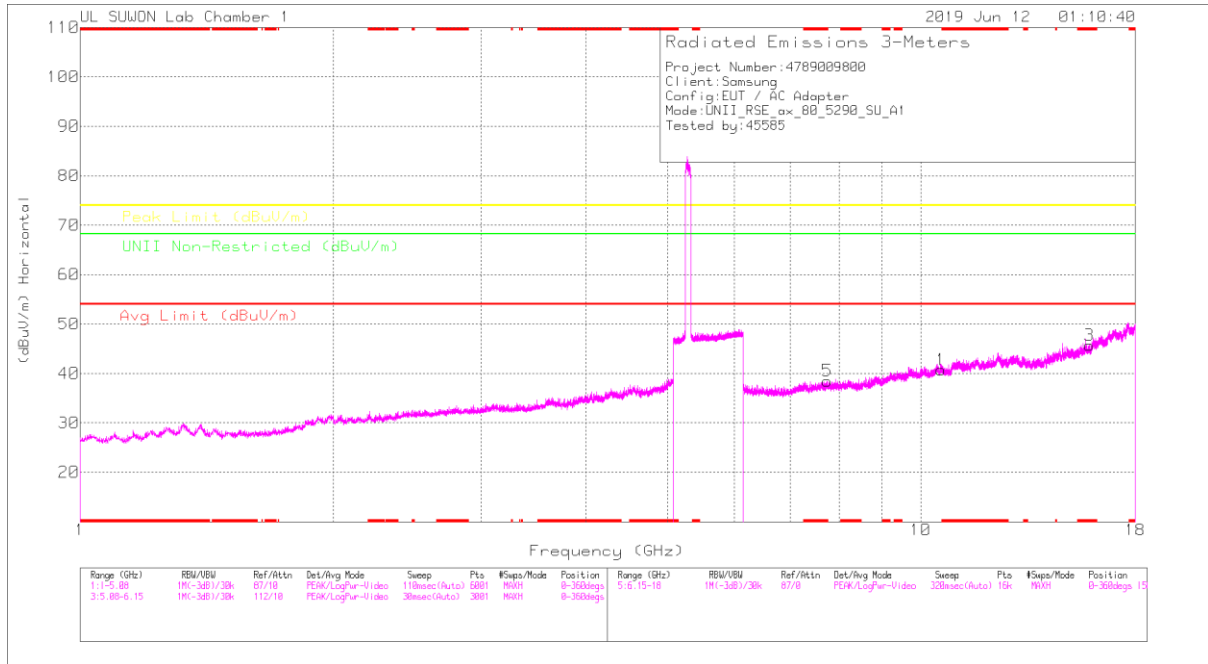

MID CHANNEL VERTICAL

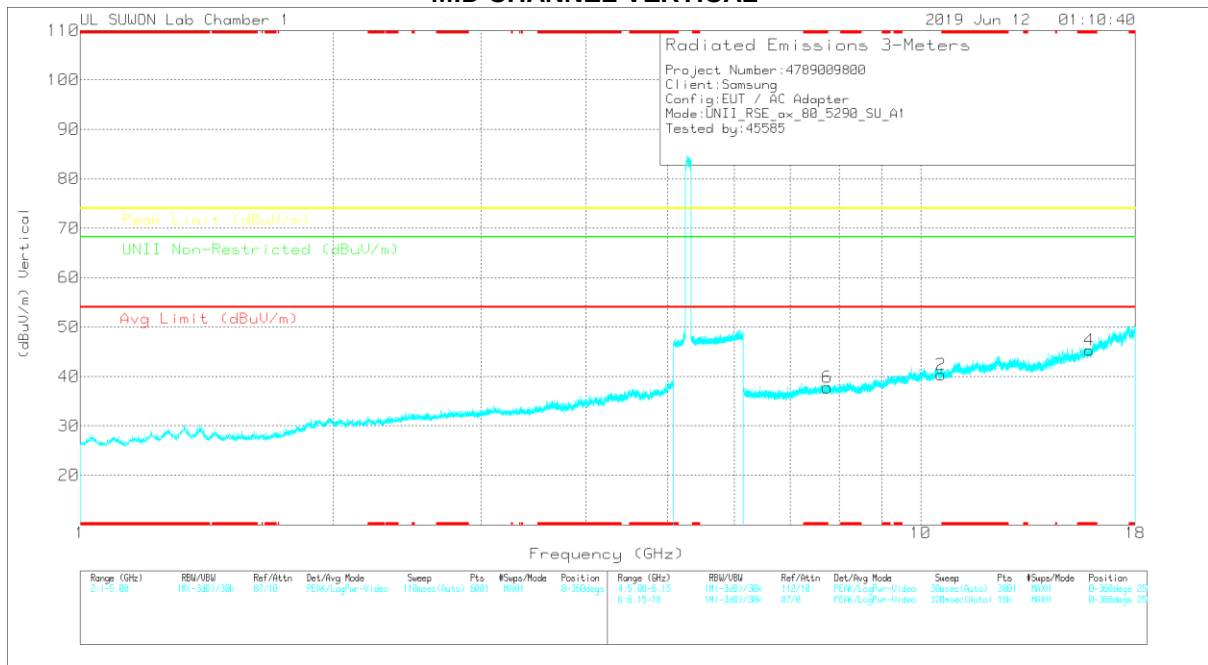

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00108717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	10.57903	25.54	PK	37.8	-22.6	0	40.74	-	-	-	-	68.2	-27.46	0-360	150	H
3	* 15.8701	26.08	PK	40.6	-21	0	45.68	-	-	74	-28.32	-	-	0-360	150	H
5	* 7.74299	29.09	PK	35.9	-26.5	0	38.49	-	-	74	-35.51	-	-	0-360	250	H
2	10.5794	25.15	PK	37.8	-22.6	0	40.35	-	-	-	-	68.2	-27.85	0-360	150	V
4	* 15.87232	25.69	PK	40.6	-21	0	45.29	-	-	74	-28.71	-	-	0-360	150	V
6	* 7.74595	28.37	PK	35.9	-26.5	0	37.77	-	-	74	-36.23	-	-	0-360	150	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HE80 SU mode (ANT_2)

MID CHANNEL HORIZONTAL

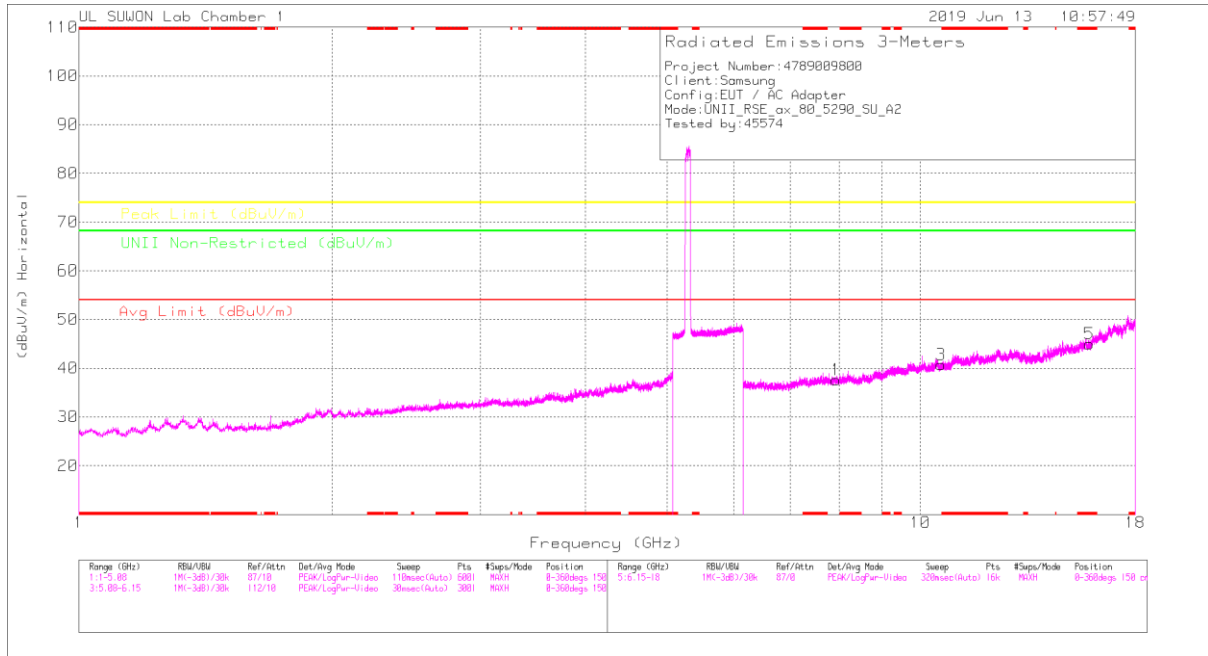

MID CHANNEL VERTICAL

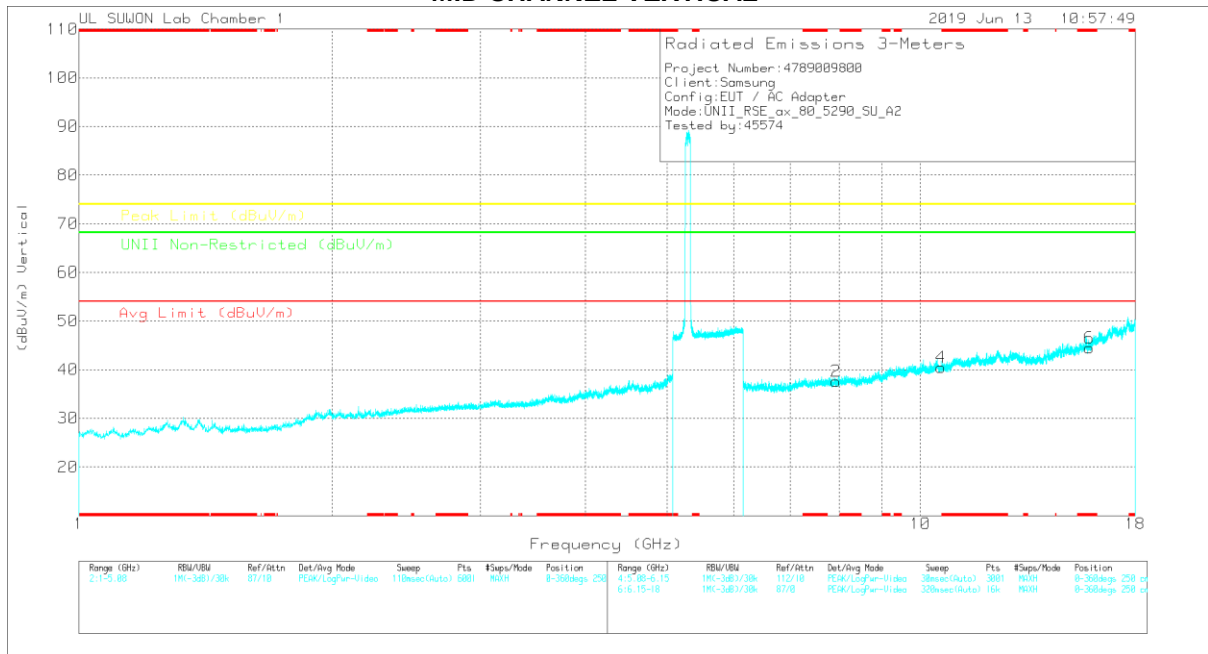

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00108717	6GHz_HRP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.93776	27.81	PK	36	-26.2	0	37.61	-	-	-	-	68.2	-30.59	0-360	250	H
3	10.5794	25.54	PK	37.8	-22.6	0	40.74	-	-	-	-	68.2	-27.46	0-360	150	H
5	* 15.8701	25.38	PK	40.6	-21	0	44.98	-	-	74	-29.02	-	-	0-360	150	H
2	7.94146	27.85	PK	36	-26.2	0	37.65	-	-	-	-	68.2	-30.55	0-360	150	V
4	10.58237	25.28	PK	37.8	-22.6	0	40.48	-	-	-	-	68.2	-27.72	0-360	250	V
6	* 15.87084	24.85	PK	40.6	-21	0	44.45	-	-	74	-29.55	-	-	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HE20 RU mode (ANT_1 / 26T / Low: 4, Mid: 4, High: 4)

LOW CHANNEL HORIZONTAL

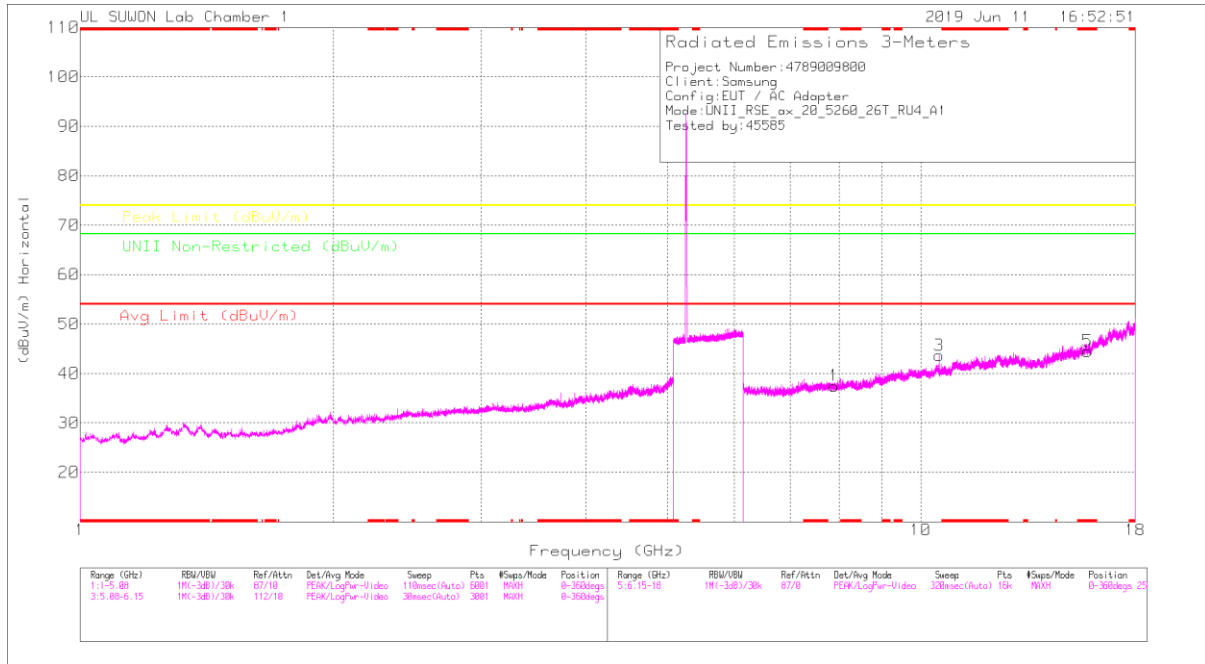

LOW CHANNEL VERTICAL

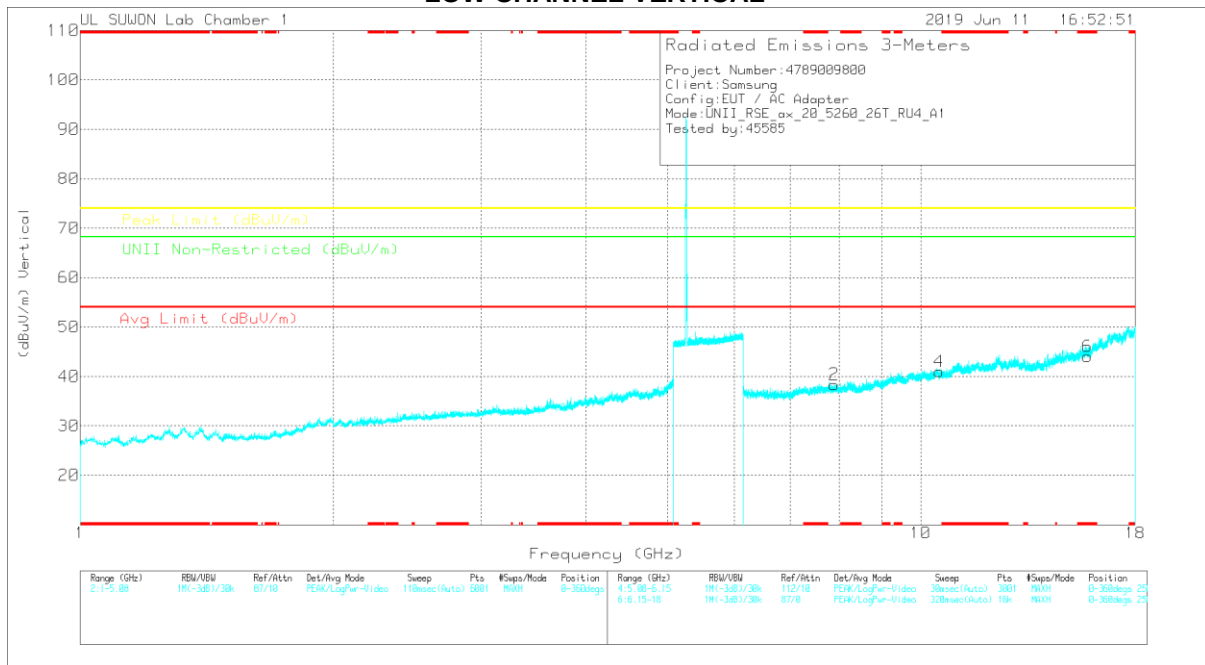

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unli Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.88962	27.99	PK	36	-26.5	0	37.49	-	-	-	-	68.2	-30.71	0-360	250	H
3	10.51942	28.58	PK	37.7	-22.6	0	43.68	-	-	-	-	68.2	-24.52	0-360	250	H
5	* 15.78049	25.21	PK	40.5	-21.2	0	44.51	-	-	74	-29.49	-	-	0-360	150	H
2	7.89111	28.67	PK	36	-26.5	0	38.37	-	-	-	-	68.2	-29.83	0-360	150	V
4	10.51942	25.88	PK	37.7	-22.6	0	40.98	-	-	-	-	68.2	-27.22	0-360	150	V
6	* 15.78049	24.76	PK	40.5	-21.2	0	44.06	-	-	74	-29.94	-	-	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unli Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
10.52014	41.11	PK-U	37.7	-22.6	0	56.21	-	-	-	-	68.2	-11.99	142	187	H
10.52024	37.95	PK-U	37.7	-22.6	0	53.05	-	-	-	-	68.2	-15.15	171	174	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

MID CHANNEL HORIZONTAL

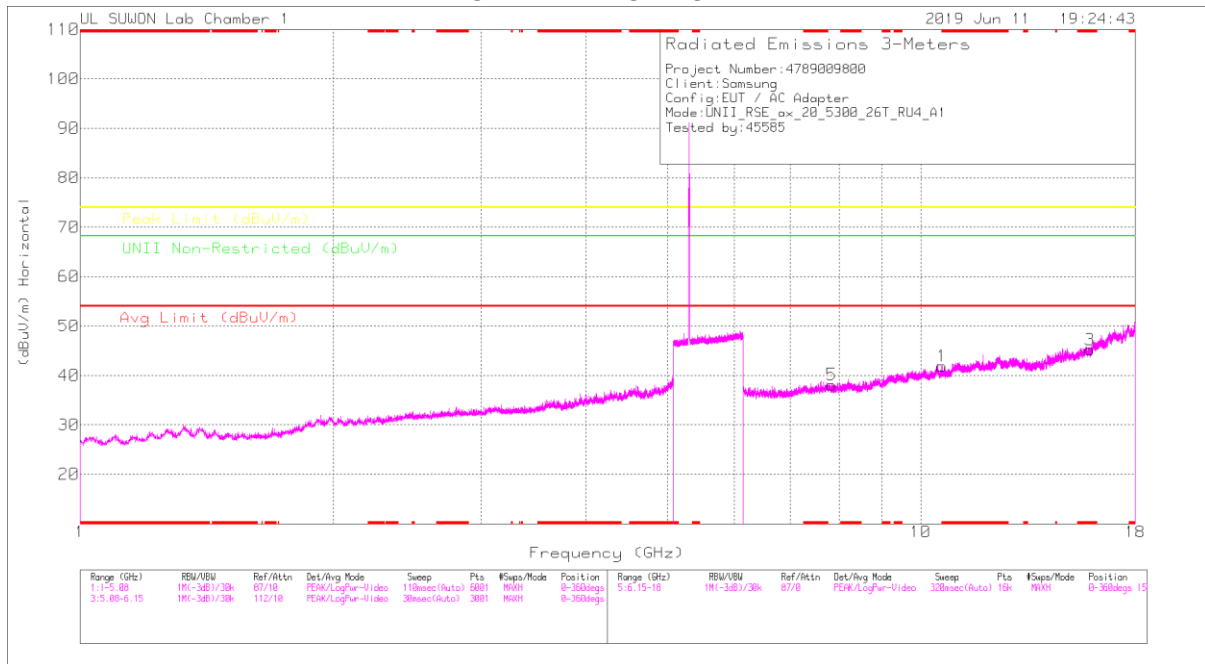

MID CHANNEL VERTICAL

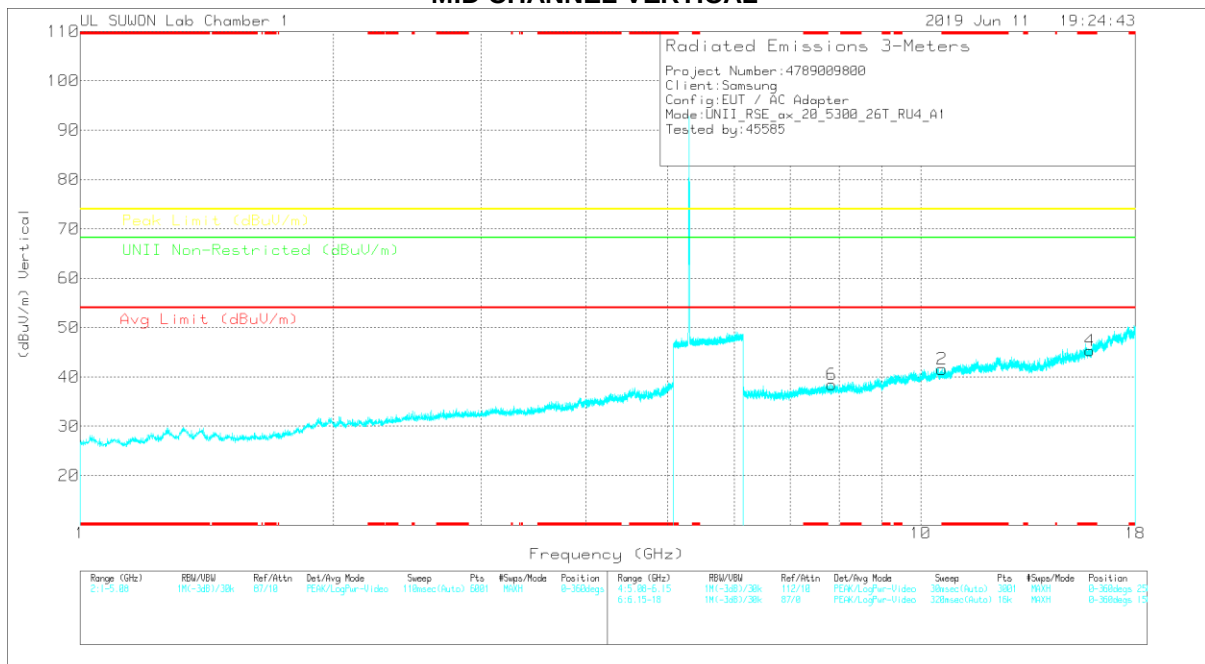

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 10.60088	26.37	PK	37.8	-22.3	0	41.87	-	-	74	-32.13	-	-	0-360	250	H
3	* 15.89676	25.68	PK	40.6	-21.1	0	45.18	-	-	74	-28.82	-	-	0-360	150	H
5	7.83482	28.89	PK	35.9	-26.7	0	38.09	-	-	-	-	68.2	-30.11	0-360	250	H
2	* 10.60014	26.08	PK	37.8	-22.3	0	41.58	-	-	74	-32.42	-	-	0-360	150	V
4	* 15.89898	25.93	PK	40.6	-21.2	0	45.33	-	-	74	-28.67	-	-	0-360	150	V
6	7.83926	29.15	PK	35.9	-26.6	0	38.45	-	-	-	-	68.2	-29.75	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

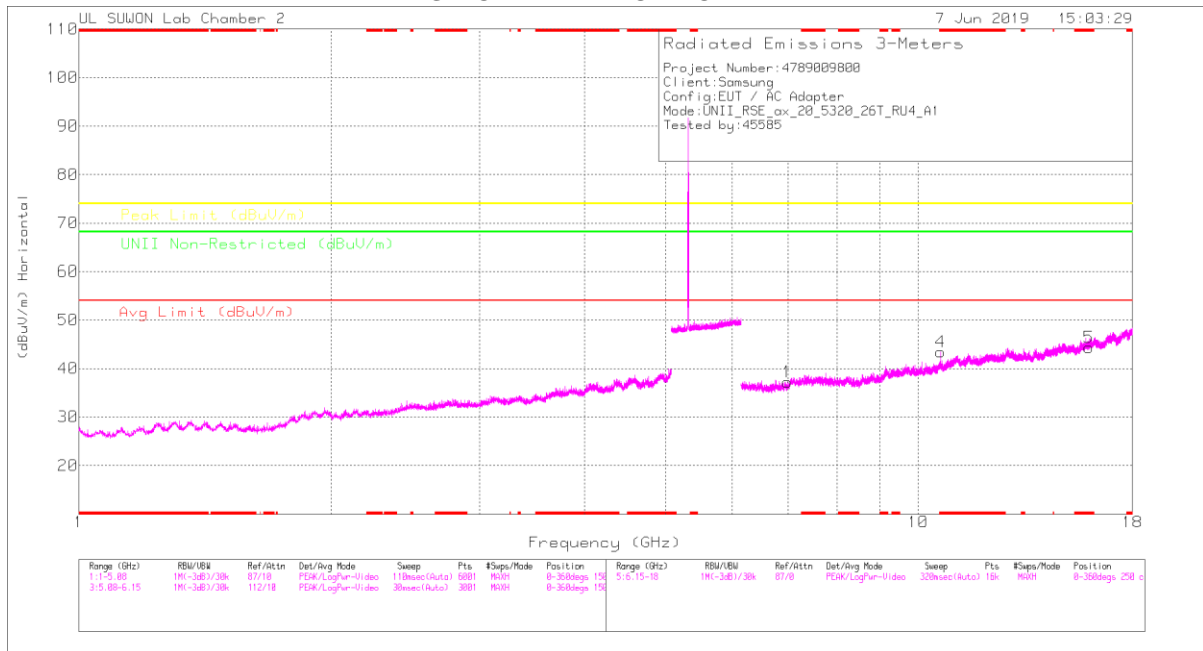

HIGH CHANNEL VERTICAL

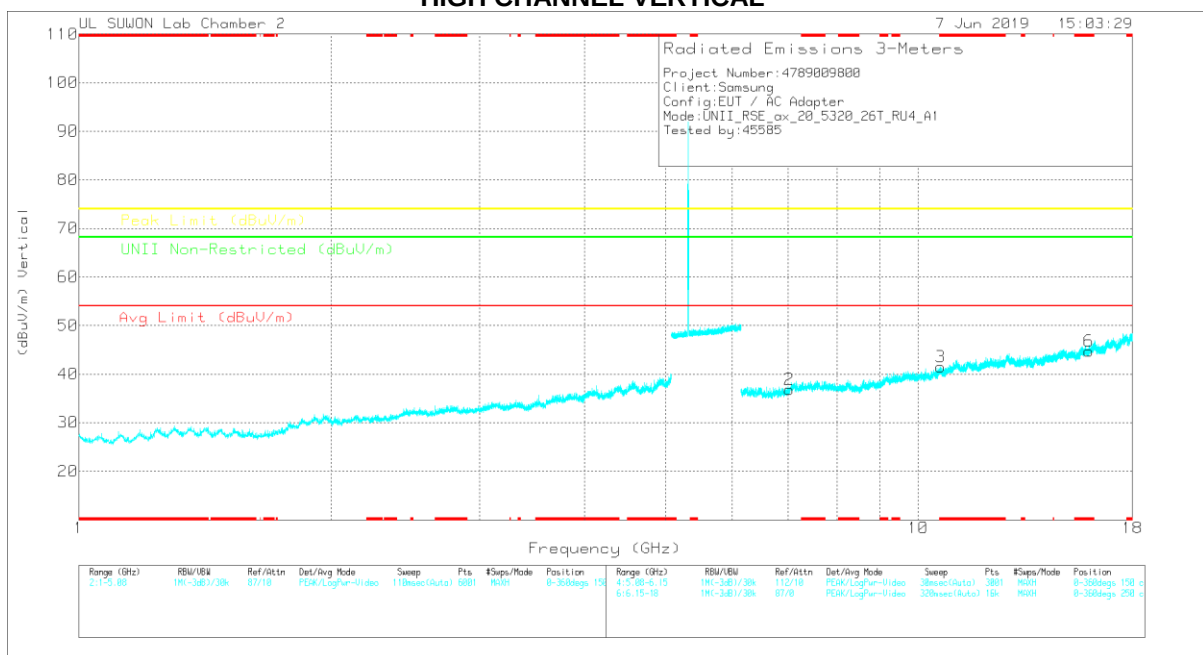

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	6GHz_HP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	6.981	27.07	PK	35.8	-25.7	0	37.17	-	-	-	-	68.2	-31.03	0-360	250	H
4	* 10.64	25.24	PK	37.8	-19.6	0	43.44	-	-	74	-30.56	-	-	0-360	250	H
5	* 15.96	23.41	PK	40.5	-19.6	0	44.31	-	-	74	-29.69	-	-	0-360	150	H
2	7.018	26.49	PK	35.8	-25.4	0	36.89	-	-	-	-	68.2	-31.31	0-360	150	V
3	* 10.633	23.29	PK	37.8	-19.6	0	41.49	-	-	74	-32.51	-	-	0-360	150	V
6	* 15.96	23.84	PK	40.5	-19.6	0	44.74	-	-	74	-29.26	-	-	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	6GHz_HP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 10.638	41.74	PK-U	37.8	-19.6	0	59.94	-	-	74	-14.06	-	-	145	178	H
* 10.64	24.78	ADR	37.8	-19.6	0	42.98	54	-11.02	-	-	-	-	145	178	H
* 10.638	37.84	PK-U	37.8	-19.6	0	56.04	-	-	74	-17.96	-	-	178	154	V
* 10.64	22.65	ADR	37.8	-19.6	0	40.85	54	-13.15	-	-	-	-	178	154	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

HE20 RU mode (ANT_2 / 26T / Low: 4, Mid: 4, High: 4)

LOW CHANNEL HORIZONTAL

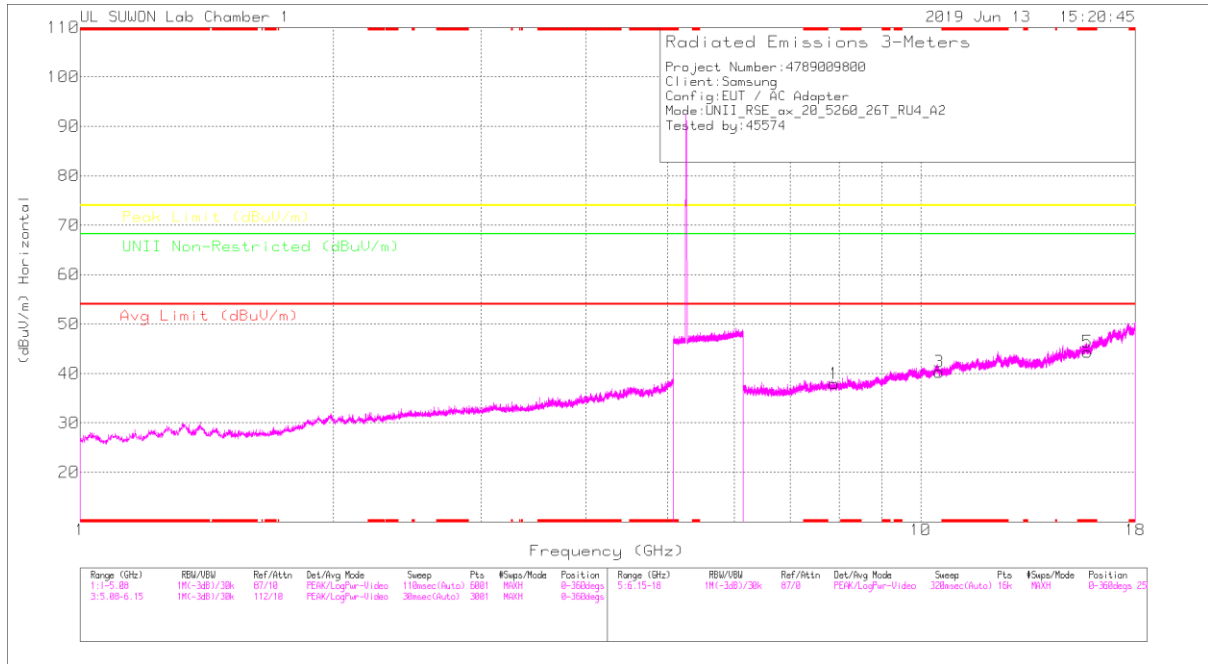

LOW CHANNEL VERTICAL

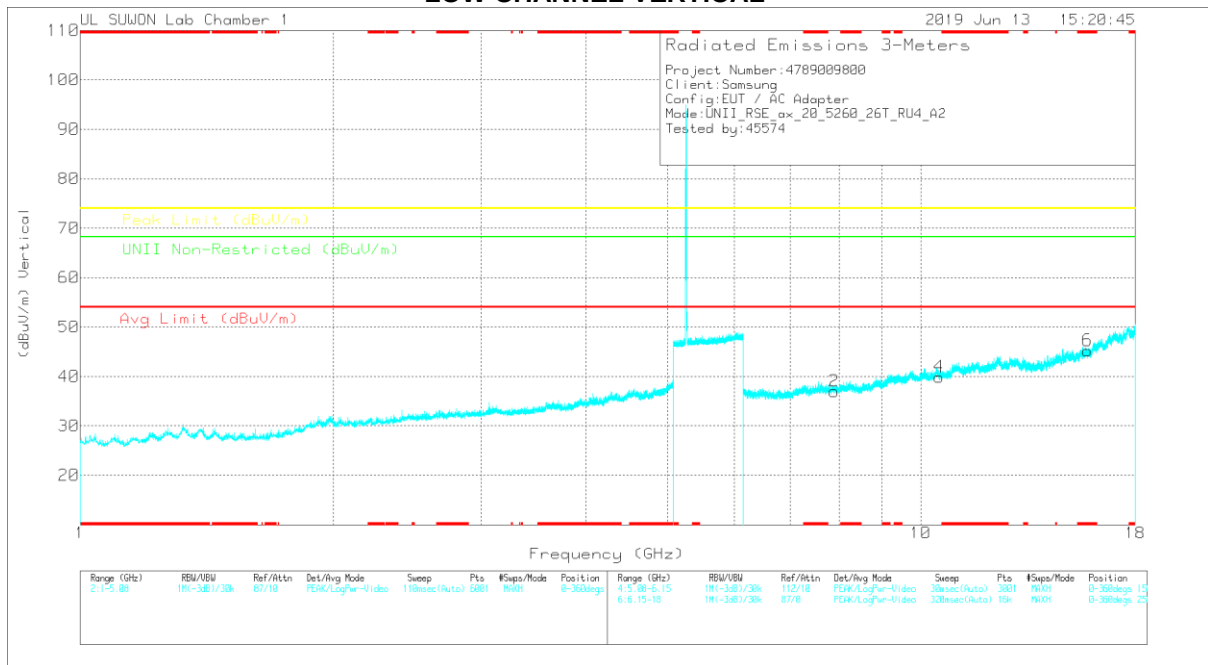

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.89036	28.42	PK	36	-26.5	0	37.92	-	-	-	-	68.2	-30.28	0-360	250	H
3	10.52164	25.32	PK	37.7	-22.7	0	40.32	-	-	-	-	68.2	-27.88	0-360	250	H
5	* 15.78049	25.02	PK	40.5	-21.2	0	44.32	-	-	74	-29.68	-	-	0-360	250	H
2	7.88962	27.51	PK	36	-26.5	0	37.01	-	-	-	-	68.2	-31.19	0-360	150	V
4	10.52164	24.9	PK	37.7	-22.7	0	39.9	-	-	-	-	68.2	-28.3	0-360	250	V
6	* 15.78049	25.95	PK	40.5	-21.2	0	45.25	-	-	74	-28.75	-	-	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

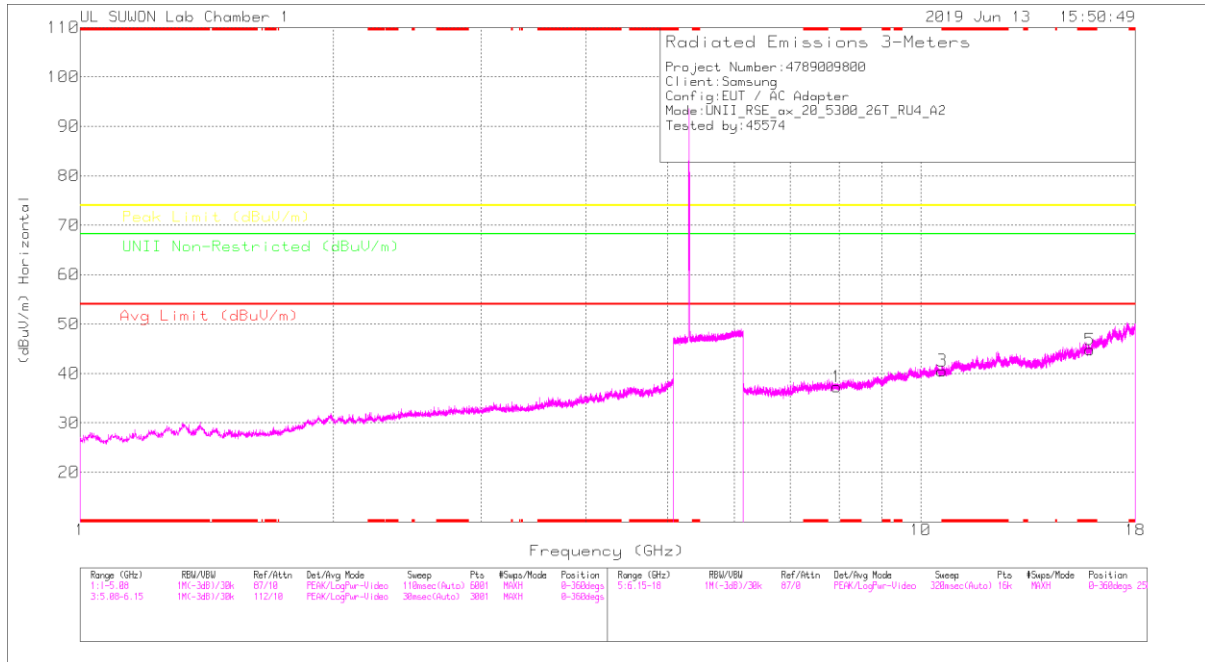

MID CHANNEL VERTICAL

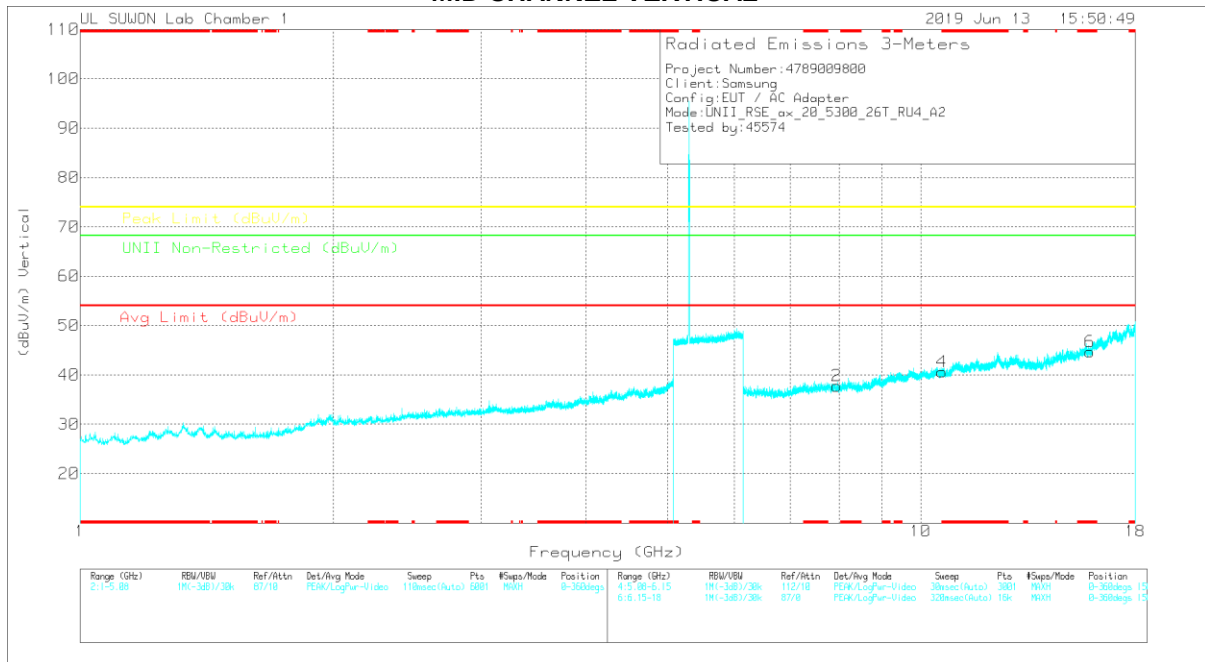

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	7.95035	27.5	PK	36	-26.2	0	37.3	-	-	-	-	68.2	-30.9	0-360	250	H
3	*10.60236	25.02	PK	37.8	-22.3	0	40.52	-	-	74	-33.48	-	-	0-360	150	H
5	*15.90046	25.29	PK	40.6	-21.1	0	44.79	-	-	74	-29.21	-	-	0-360	250	H
2	7.95035	27.97	PK	36	-26.2	0	37.77	-	-	-	-	68.2	-30.43	0-360	250	V
4	*10.60236	25.11	PK	37.8	-22.3	0	40.61	-	-	74	-33.39	-	-	0-360	150	V
6	*15.90046	25.16	PK	40.6	-21.1	0	44.66	-	-	74	-29.34	-	-	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

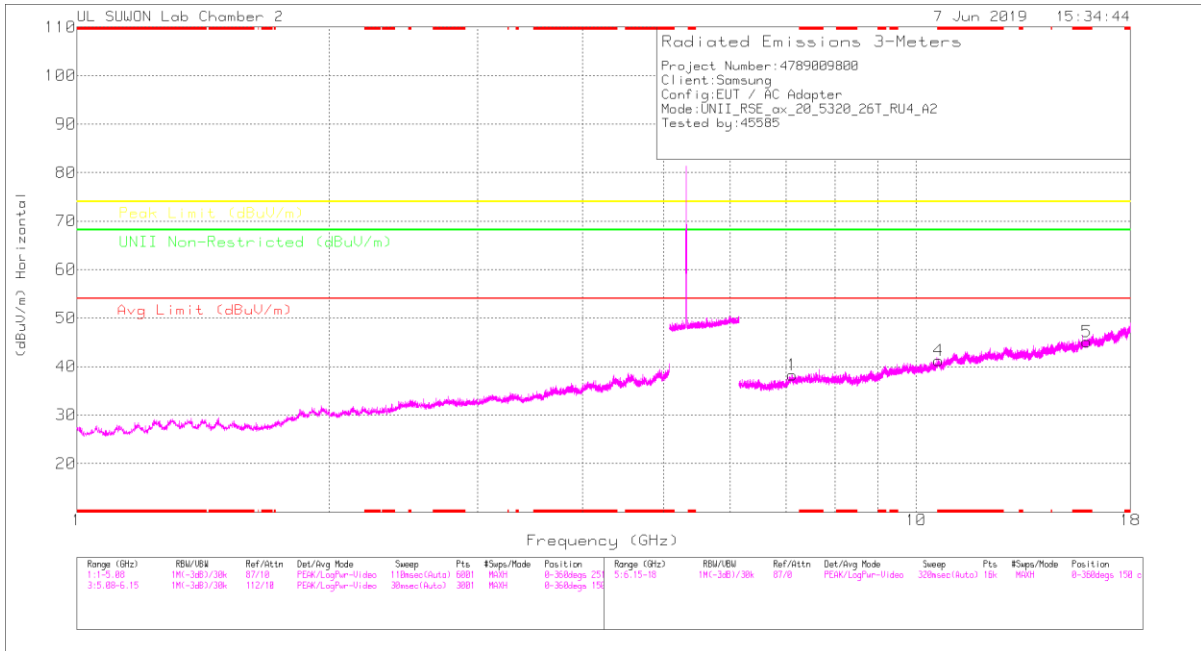

HIGH CHANNEL VERTICAL

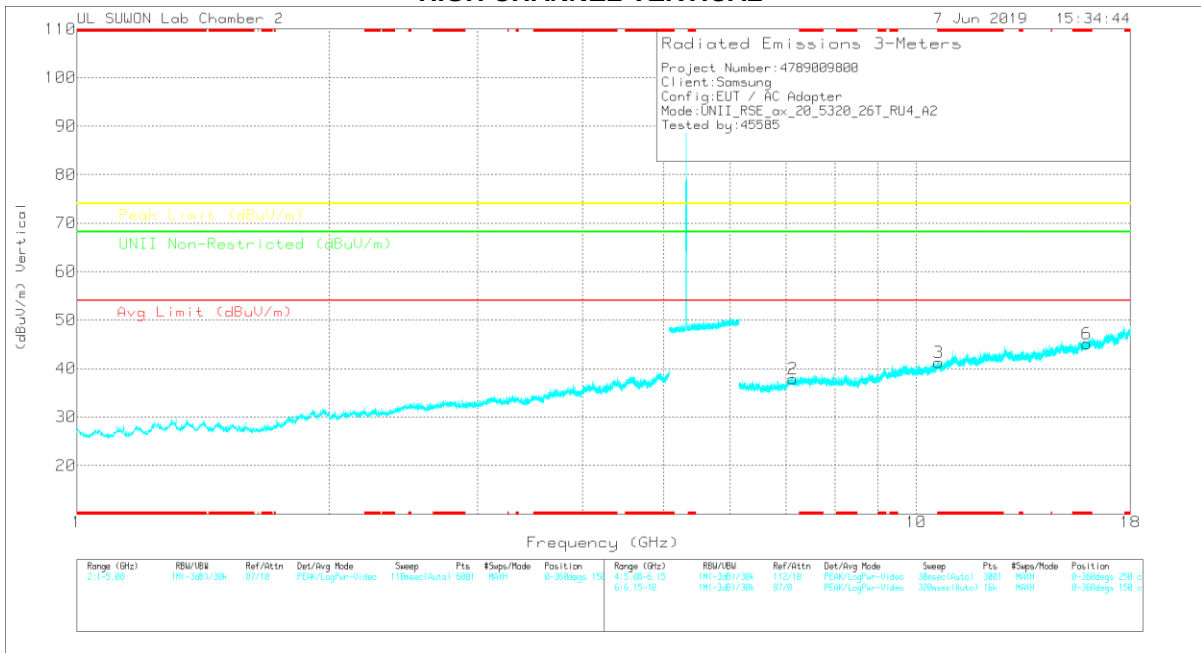

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meas Reading (dBuV)	Det	3117_00168724	60Hz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Depo)	Height (cm)	Polarity
1	7.114	26.08	PK	36	-23.8	0	38.28	-	-	-	-	68.2	-29.92	0-360	250	H
4	* 10.642	23.12	PK	37.8	-19.7	0	41.22	-	-	74	-32.78	-	-	0-360	150	H
5	* 15.96	24.17	PK	40.5	-19.6	0	45.07	-	-	74	-28.93	-	-	0-360	250	H
2	7.13	25.78	PK	36	-23.9	0	37.88	-	-	-	-	68.2	-30.32	0-360	250	V
3	* 10.64	22.99	PK	37.8	-19.6	0	41.19	-	-	74	-32.81	-	-	0-360	150	V
6	* 15.96	24.18	PK	40.5	-19.6	0	45.08	-	-	74	-28.92	-	-	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HE40 RU mode (ANT_1 / 26T / Low: 9, High: 0)

LOW CHANNEL HORIZONTAL

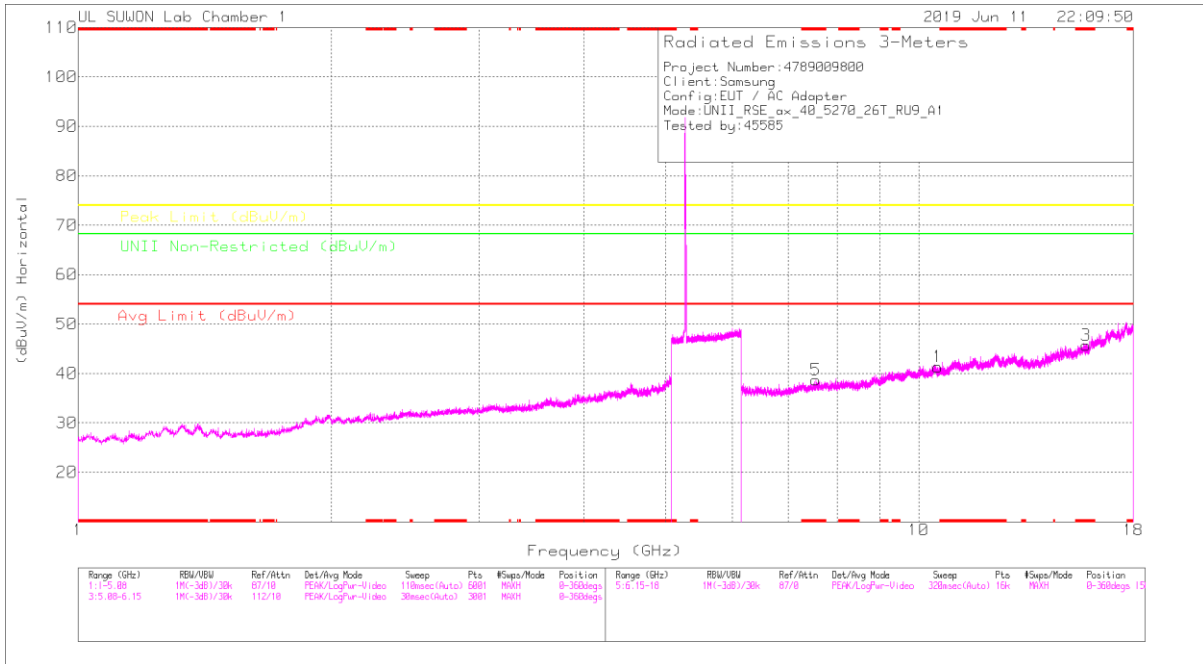

LOW CHANNEL VERTICAL

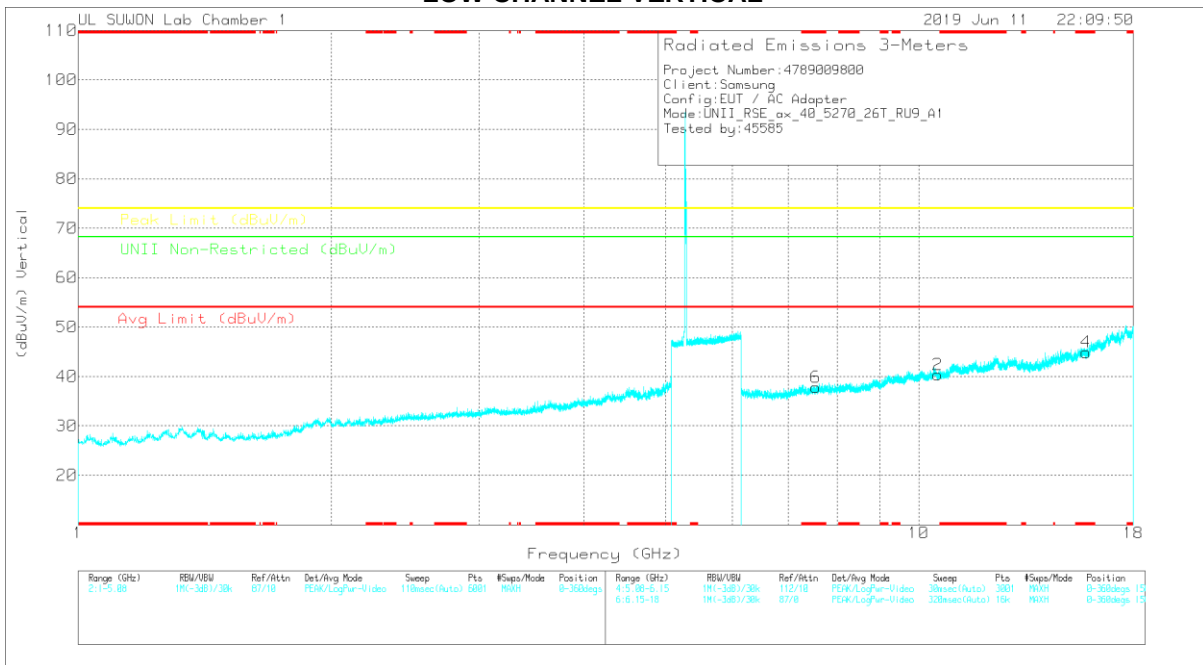

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HRP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	10.54237	26.32	PK	37.8	-22.8	0	41.32	-	-	-	-	68.2	-26.88	0-360	250	H
3	* 15.81159	26.28	PK	40.5	-21.1	0	45.68	-	-	74	-28.32	-	-	0-360	250	H
5	* 7.54969	29.39	PK	35.8	-26.5	0	38.69	-	-	74	-35.31	-	-	0-360	250	H
2	10.54386	25.34	PK	37.8	-22.8	0	40.34	-	-	-	-	68.2	-27.86	0-360	250	V
4	* 15.80937	25.49	PK	40.5	-21.1	0	44.89	-	-	74	-29.11	-	-	0-360	250	V
6	* 7.55044	28.52	PK	35.8	-26.5	0	37.82	-	-	74	-36.18	-	-	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

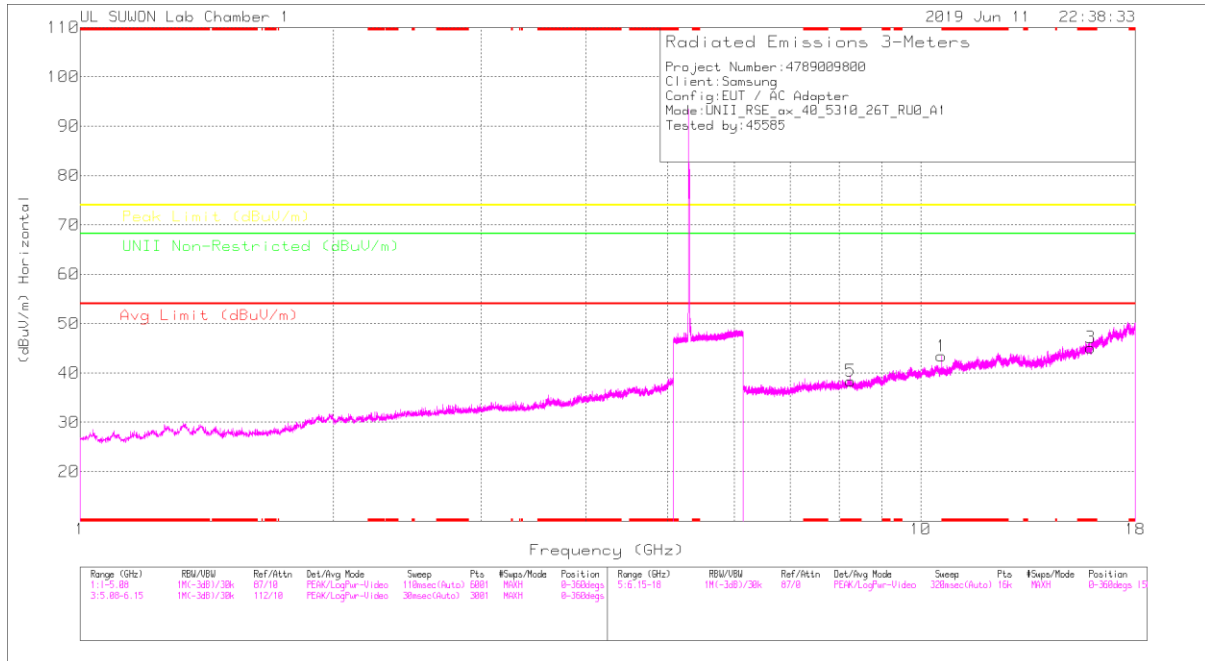

HIGH CHANNEL VERTICAL

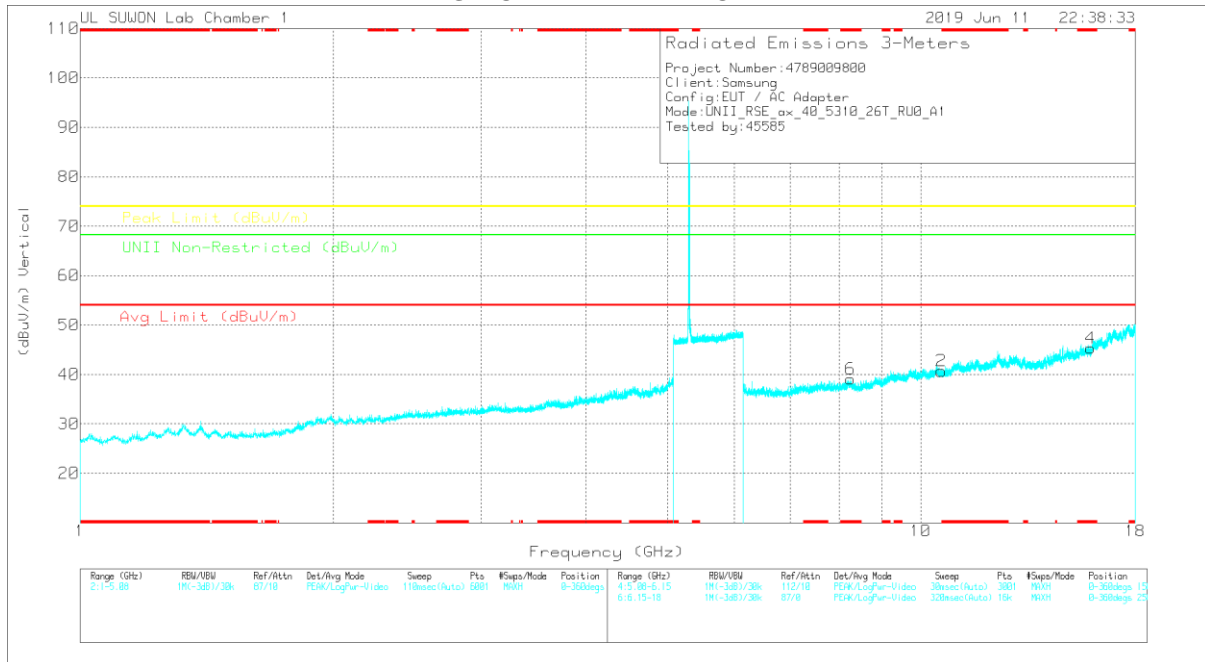

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	10.58385	28.12	PK	37.8	-22.5	0	43.42	-	-	-	-	68.2	-24.78	0-360	250	H
3	* 15.92961	25.61	PK	40.6	-21.1	0	45.11	-	-	74	-28.89	-	-	0-360	150	H
5	* 8.25102	27.27	PK	36.4	-25.3	0	38.37	-	-	74	-35.63	-	-	0-360	150	H
2	10.58311	25.49	PK	37.8	-22.6	0	40.69	-	-	-	-	68.2	-27.51	0-360	150	V
4	* 15.92638	25.8	PK	40.6	-21.1	0	45.3	-	-	74	-28.7	-	-	0-360	150	V
6	* 8.24732	28.06	PK	36.4	-25.4	0	39.06	-	-	74	-34.94	-	-	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
10.58355	46.83	PK-U	37.8	-22.6	0	62.03	-	-	-	-	68.2	-6.17	142	238	H
10.58341	42.91	PK-U	37.8	-22.6	0	58.11	-	-	-	-	68.2	-10.09	175	170	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

HE40 RU mode (ANT_2 / 26T / Low: 0, High: 0)

LOW CHANNEL HORIZONTAL

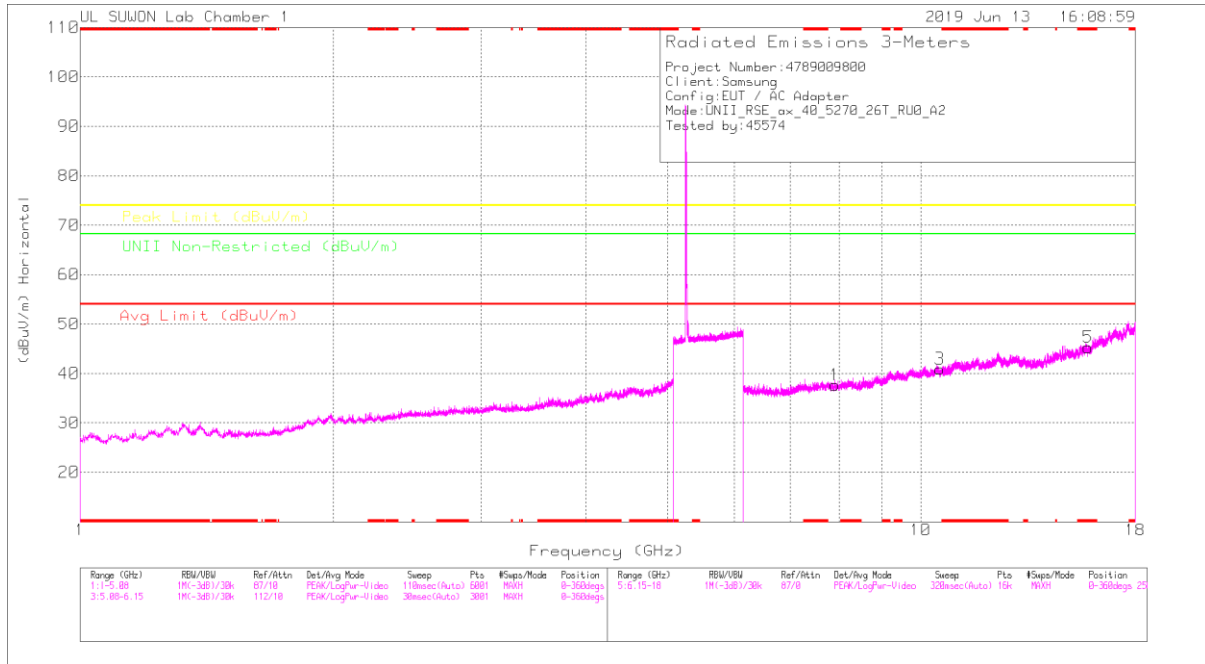

LOW CHANNEL VERTICAL

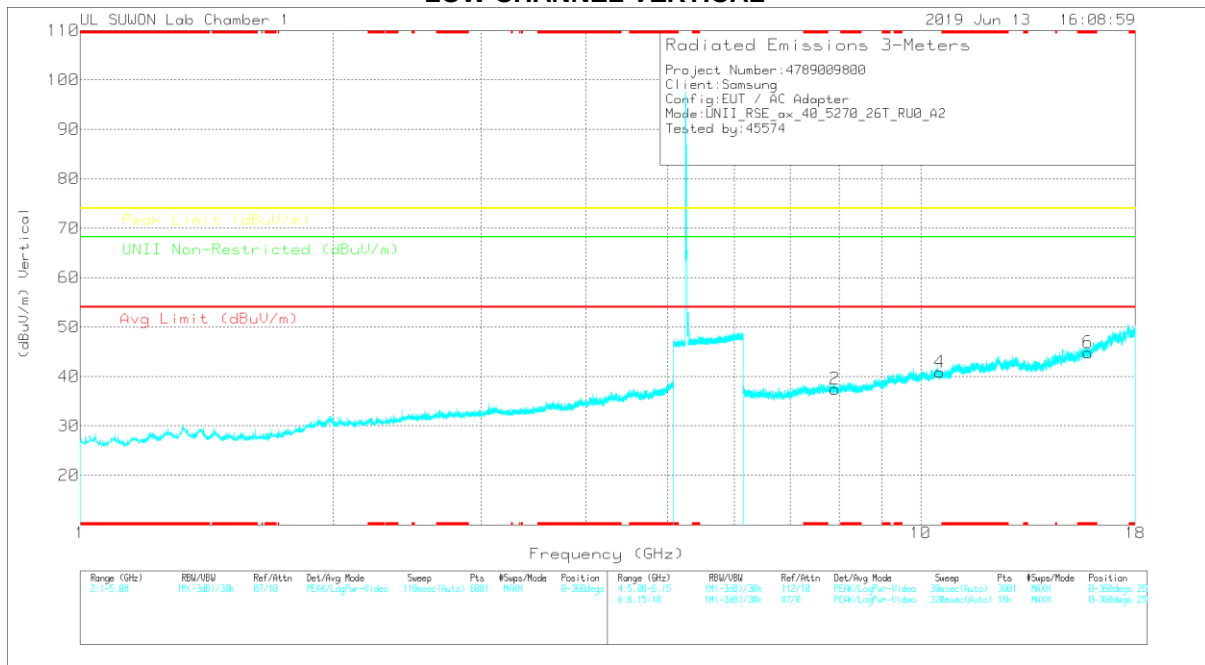

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00108717	6GHz_HRP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.90628	28.05	PK	36	-26.4	0	37.65	-	-	-	-	68.2	-30.55	0-360	250	H
3	10.54163	25.89	PK	37.8	-22.8	0	40.89	-	-	-	-	68.2	-27.31	0-360	250	H
5	* 15.81085	25.88	PK	40.5	-21.1	0	45.28	-	-	74	-28.72	-	-	0-360	150	H
2	7.90591	27.88	PK	36	-26.4	0	37.48	-	-	-	-	68.2	-30.72	0-360	150	V
4	10.54163	25.9	PK	37.8	-22.8	0	40.9	-	-	-	-	68.2	-27.3	0-360	250	V
6	* 15.81085	25.45	PK	40.5	-21.1	0	44.85	-	-	74	-29.15	-	-	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).