




**LTE Band 38C(UL CA)**

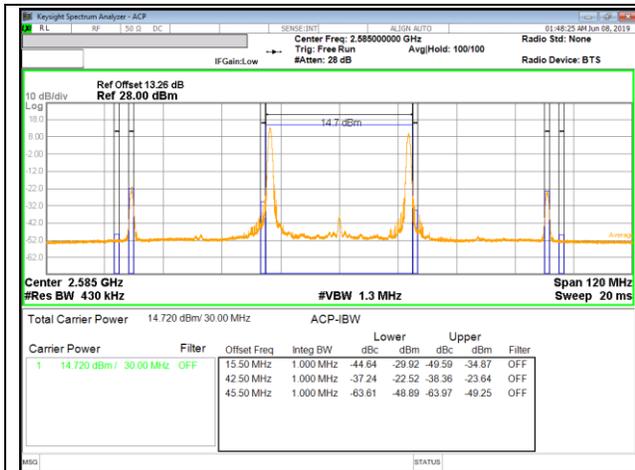


LTE B38 15MHz + 15MHz QPSK Low Ch RB1-0 + RB1-74

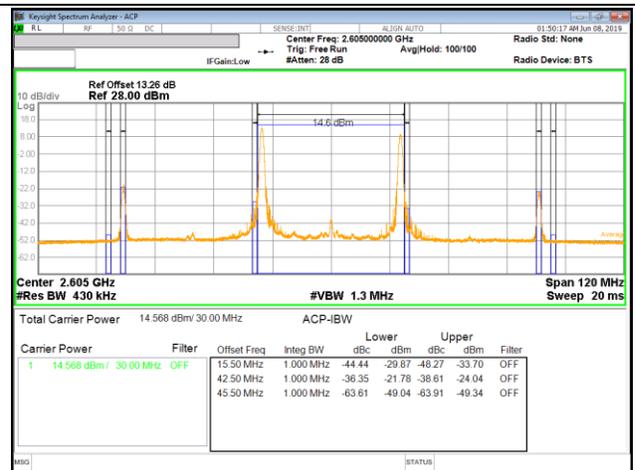


LTE B38 15MHz + 15MHz QPSK High Ch RB1-0 + RB1-74

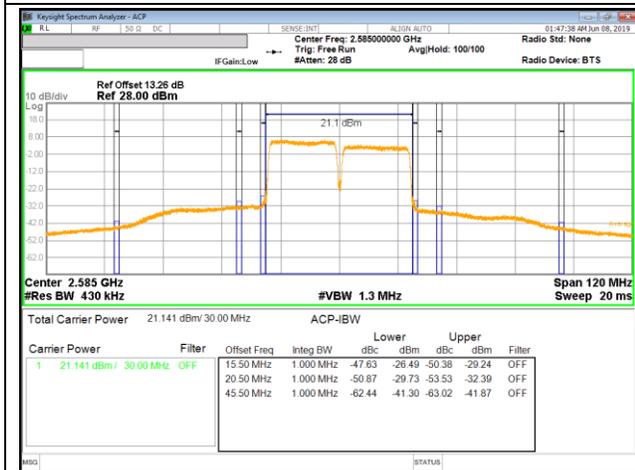


LTE B38 15MHz + 15MHz QPSK Low Ch RB75-0 + RB75-0

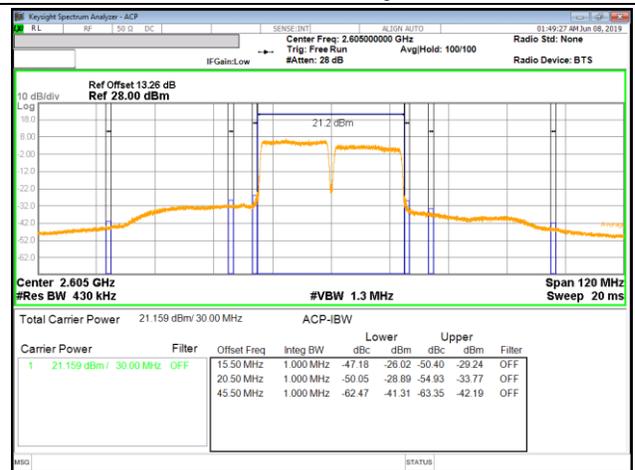


LTE B38 15MHz + 15MHz QPSK High Ch RB75-0 + RB75-0

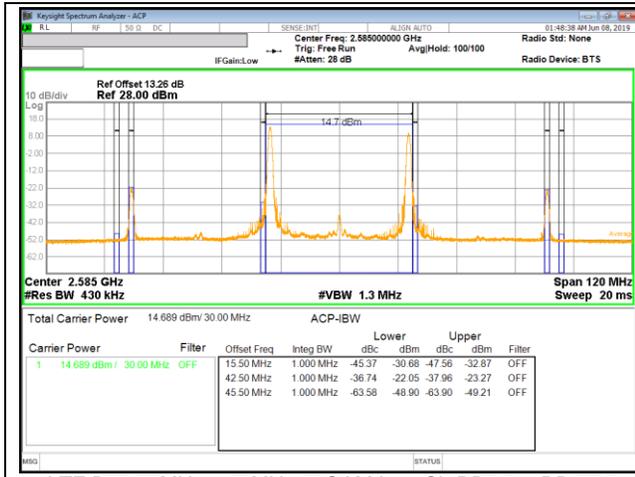

LTE B38 15MHz + 15MHz 16QAM Low Ch RB1-0 + RB1-74

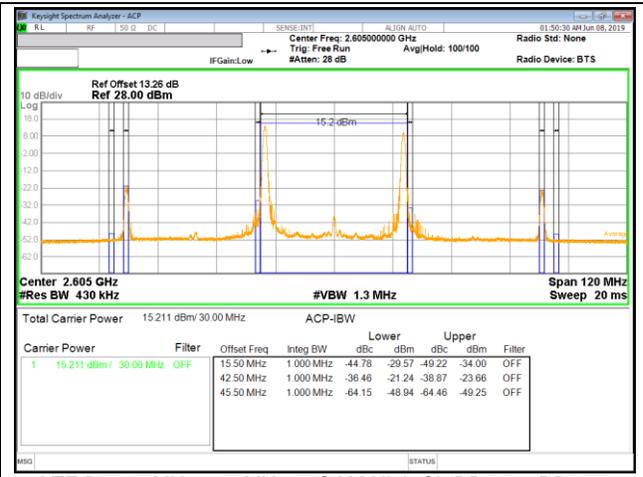


LTE B38 15MHz + 15MHz 16QAM High Ch RB1-0 + RB1-74

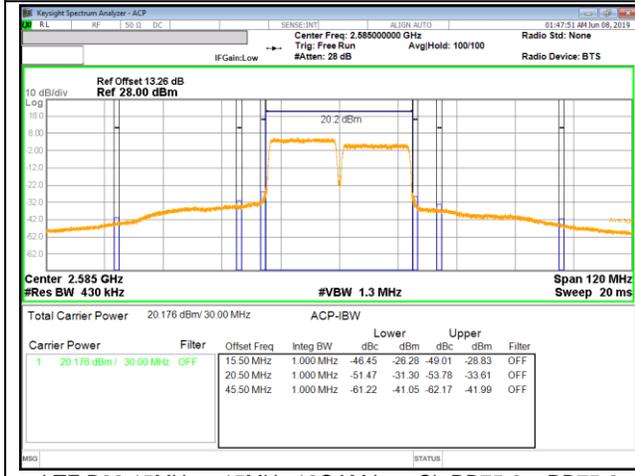


LTE B38 15MHz + 15MHz 16QAM Low Ch RB75-0 + RB75-0




LTE B38 15MHz + 15MHz 16QAM High Ch RB75-0 + RB75-0

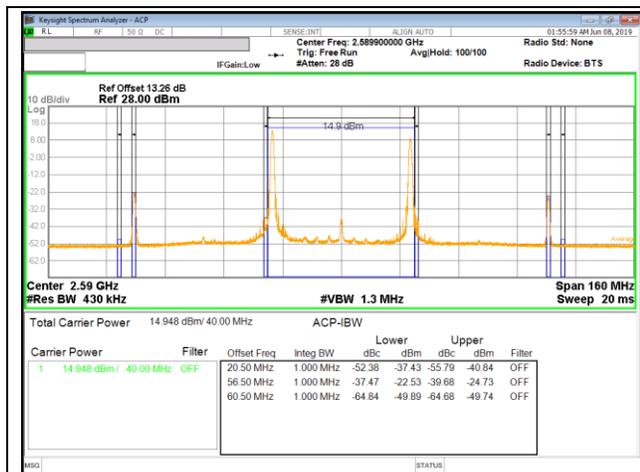


LTE B38 20MHz + 20MHz QPSK Low Ch RB1-0 + RB1-99

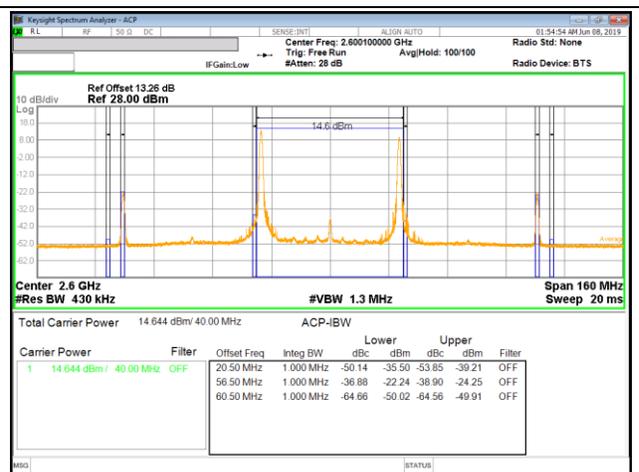


LTE B38 20MHz + 20MHz QPSK High Ch RB1-0 + RB1-99

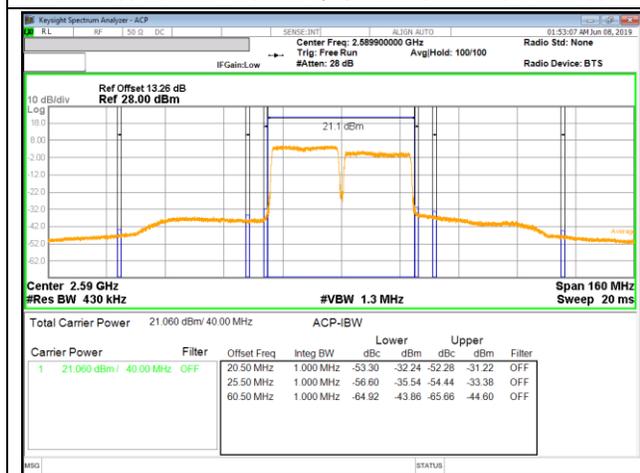


LTE B38 20MHz + 20MHz QPSK Low Ch RB100-0 + RB100-0

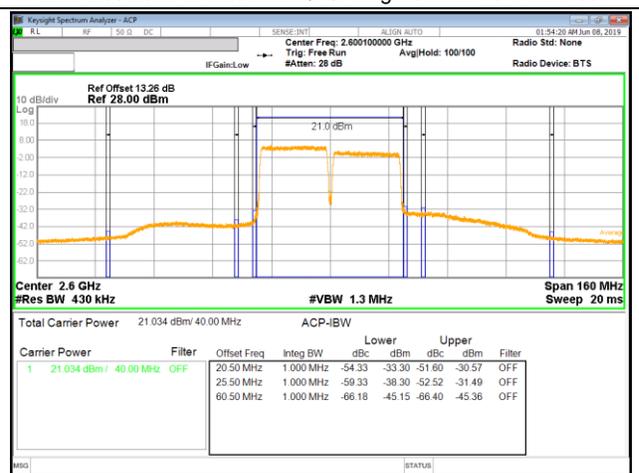


LTE B38 20MHz + 20MHz QPSK High Ch RB100-0 + RB100-0

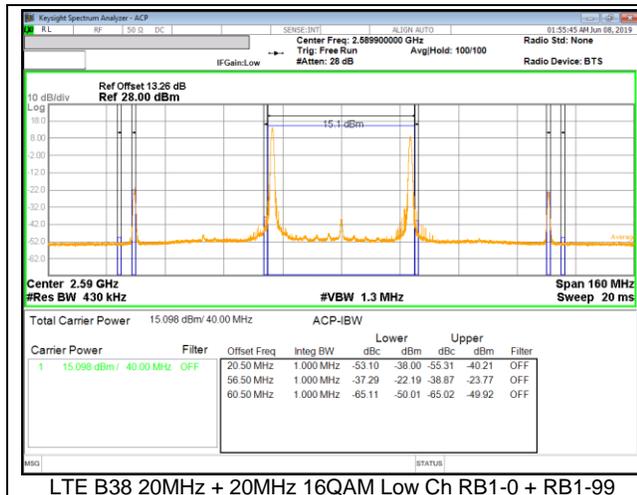


LTE B38 20MHz + 20MHz 16QAM Low Ch RB1-0 + RB1-99

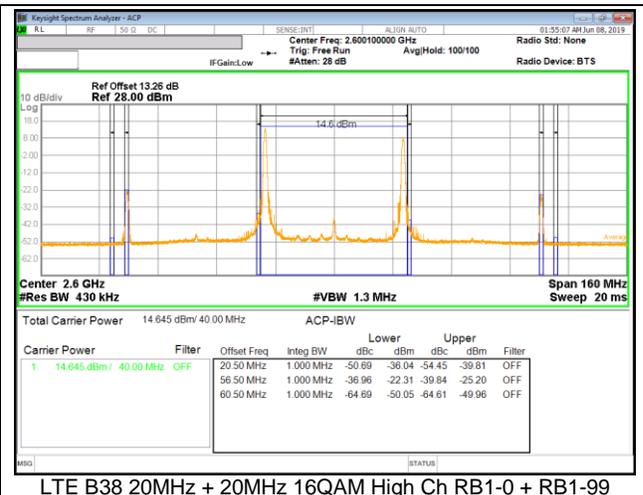

LTE B38 20MHz + 20MHz 16QAM High Ch RB1-0 + RB1-99

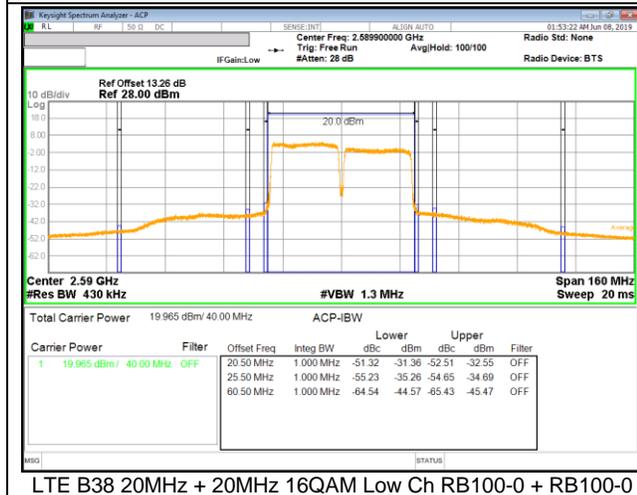

LTE B38 20MHz + 20MHz 16QAM Low Ch RB100-0 + RB100-0

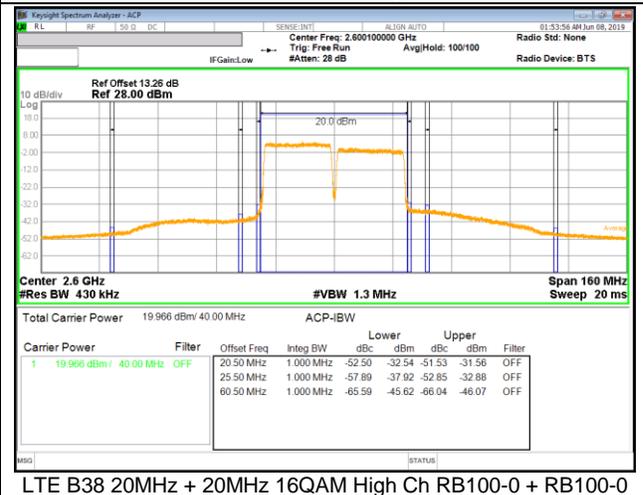

LTE B38 20MHz + 20MHz 16QAM High Ch RB100-0 + RB100-0

### **7.3. OUT OF BAND EMISSIONS**

#### **RULE PART(S)**

FCC: §27.53

#### **LIMITS**

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

Part 27.53:

(m) (4) For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

#### **TEST PROCEDURE**

Per KDB 971168 D01 Power Meas License Digital Systems v03r01

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

- a) Set the RBW = 100KHz for emission below 1GHz and 1MHz for emissions above 1GHz  
(Tests were performed 1MHz [Worst case], to sweep 1 time for all frequency range)
- b) Set VBW  $\geq 3 \times$  RBW;
- c) Set span  $\geq 1.5$  times the OBW;
- d) Sweep time = auto couple;
- e) Detector = rms;
- f) Ensure that the number of measurement points = Max (40001);
- g) Trace mode = average(LTE Band 7), Maxhold(LTE Band 38);


#### **RESULTS**

See the following pages.


NOTE : Please refer to section 5.5 for bandwidth and RB setting about LTE bands.

### 7.3.1. OUT OF BAND EMISSIONS RESULT

#### LTE Band 7C(UL CA)

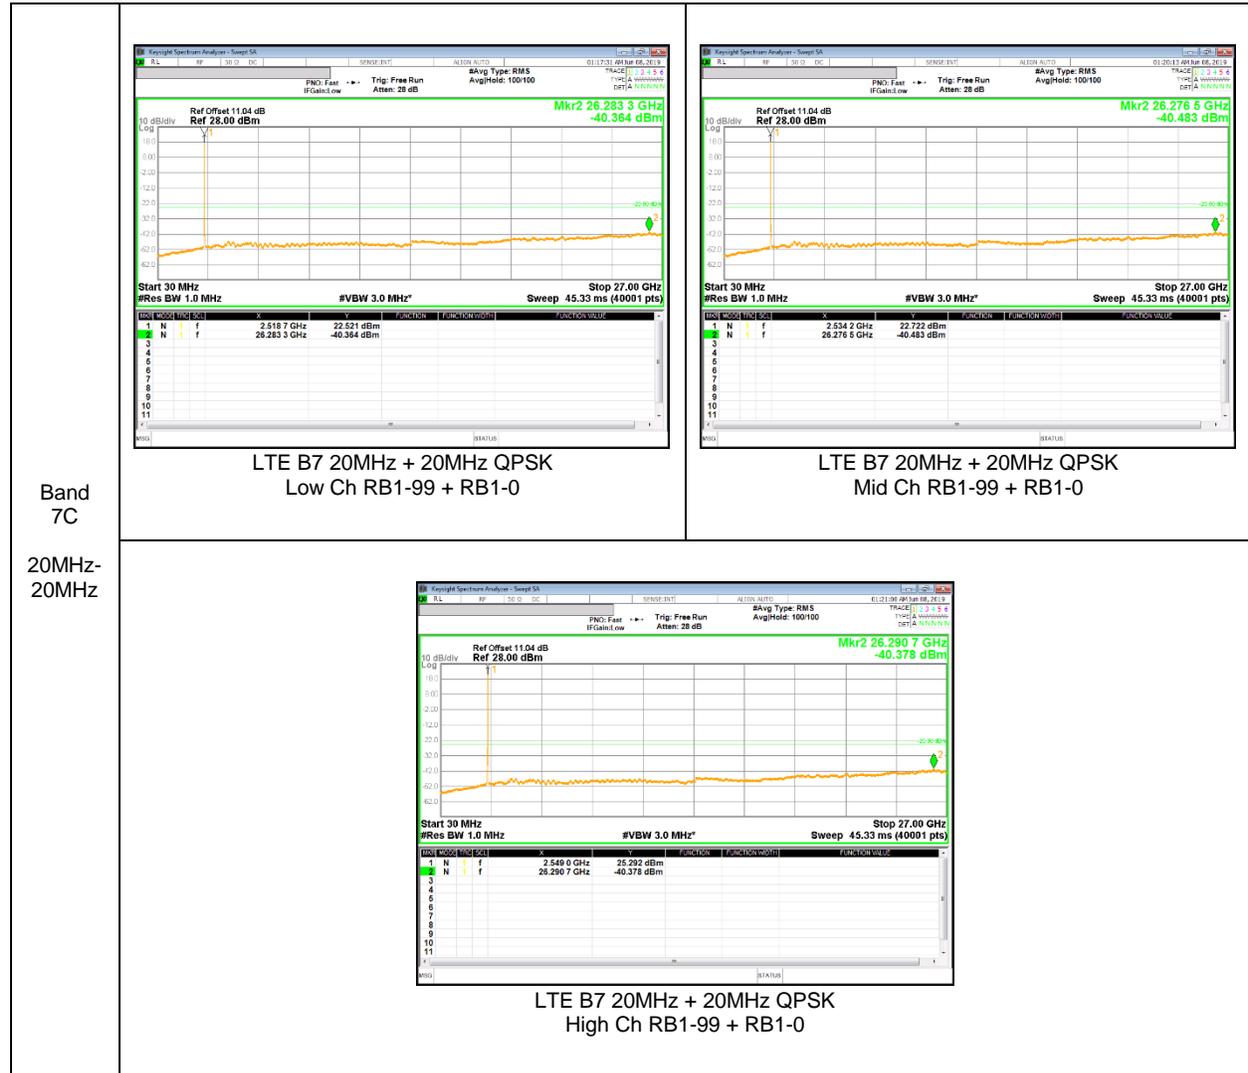

**LTE Band 38C(UL CA)**

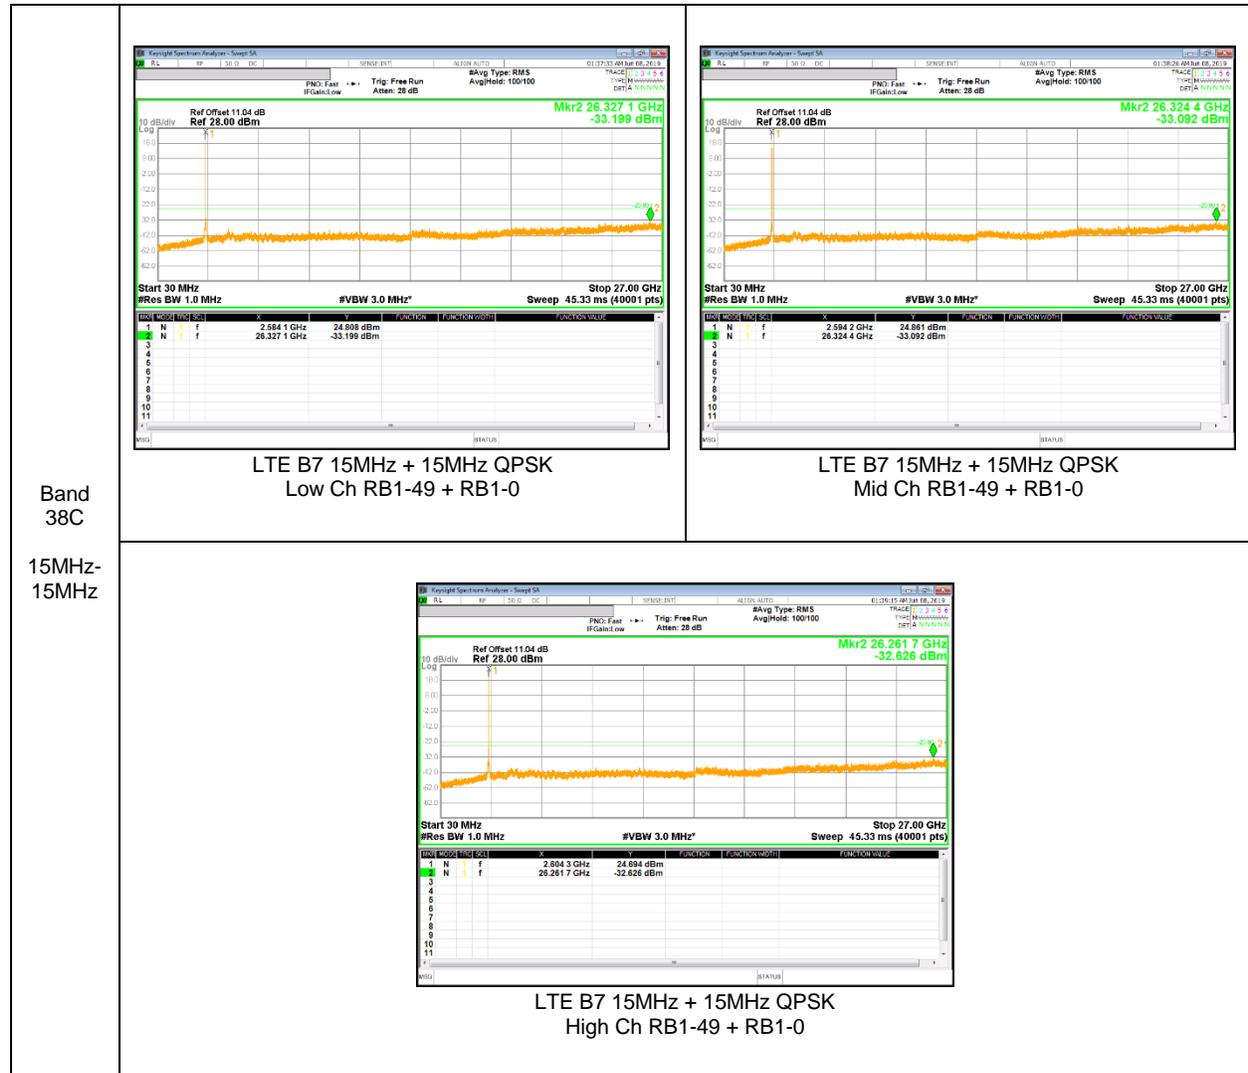

## 8. RADIATED TEST RESULTS

### 8.1. FIELD STRENGTH OF SPURIOUS RADIATION

#### RULE PART(S)

FCC: §2.1053, §27.53

#### LIMIT

Part 27.53:

(m) (4) For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

#### TEST PROCEDURE

ANSI / TIA / EIA 603 E Clause 2.2.12; ESU40 setting reference to 971168 D01 v03r01

For peak power measurement with a ESU40:

- a) Set the RBW = 100 KHz for emission below 1GHz and 1MHz for emissions above 1GHz
- b) Set VBW  $\geq 3 \times$  RBW;
- c) Set span  $\geq 1.5$  times the OBW;
- d) Sweep time = auto couple;
- e) Detector = rms;
- f) Ensure that the number of measurement points  $\geq$  span/RBW;
- g) Trace mode = average(LTE Band 7C), Maxhold(LTE Band 38C);;

#### RESULTS

See the following pages.

NOTE : Please refer to section 5.5 for bandwidth and RB setting about LTE bands.

### 8.1.1. SPURIOUS RADIATION PLOTS

#### LTE Band 7C

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		4789009800							
Date:		2019-06-17							
Test Engineer:		45585							
Configuration:		EUT / AC Adpater, Y-Position							
Location:		Chamber 1							
Mode:		LTE_QPSK Band 7 Uplink CA Harmonics, 20MHz/20MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, PCC : 2510MHz, SCC : 2529.8MHz									
5040.00	-1.5	V	3.0	43.8	1.0	-44.3	-25.0	-19.3	
7560.00	-12.1	V	3.0	42.4	1.0	-53.6	-25.0	-28.6	
10080.00	-11.3	V	3.0	40.6	1.0	-50.9	-25.0	-25.9	
5040.00	-4.5	H	3.0	43.8	1.0	-47.3	-25.0	-22.3	
7560.00	-12.3	H	3.0	42.4	1.0	-53.7	-25.0	-28.7	
10080.00	-12.9	H	3.0	40.6	1.0	-52.5	-25.0	-27.5	
Mid Ch, PCC : 2525.1MHz, SCC : 2544.9MHz									
5070.00	-1.8	V	3.0	43.8	1.0	-44.6	-25.0	-19.6	
7605.00	-9.0	V	3.0	42.4	1.0	-50.4	-25.0	-25.4	
10140.00	-11.9	V	3.0	40.6	1.0	-51.5	-25.0	-26.5	
5070.00	-3.5	H	3.0	43.8	1.0	-46.2	-25.0	-21.2	
7605.00	-12.6	H	3.0	42.4	1.0	-54.0	-25.0	-29.0	
10140.00	-13.3	H	3.0	40.6	1.0	-52.9	-25.0	-27.9	
High Ch, PCC : 2540.2MHz, SCC : 2560MHz									
5100.00	-4.2	V	3.0	43.8	1.0	-47.0	-25.0	-22.0	
7650.00	-10.2	V	3.0	42.4	1.0	-51.6	-25.0	-26.6	
10200.00	-10.3	V	3.0	40.6	1.0	-49.9	-25.0	-24.9	
5100.00	-6.4	H	3.0	43.8	1.0	-49.1	-25.0	-24.1	
7650.00	-13.6	H	3.0	42.4	1.0	-55.0	-25.0	-30.0	
10200.00	-12.6	H	3.0	40.6	1.0	-52.2	-25.0	-27.2	

**LTE Band 38C**

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: Samsung Project #: 4789009800 Date: 2019-06-17 Test Engineer: 45585 Configuration: EUT / AC Adpater, Z-Position Location: Chamber 1 Mode: LTE_QPSK Band 38 Uplink CA Hamonics, 15MHz/15MHz Bandwidth										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, PCC : 2577.5MHz SCC : 2592.5MHz										
5170.00	-16.4	V	3.0	43.8	1.0	-59.2	-25.0	-34.2		
7755.00	-15.1	V	3.0	42.3	1.0	-56.4	-25.0	-31.4		
10340.00	-5.2	V	3.0	40.7	1.0	-44.8	-25.0	-19.8		
5170.00	-16.5	H	3.0	43.8	1.0	-59.3	-25.0	-34.3		
7755.00	-15.0	H	3.0	42.3	1.0	-56.3	-25.0	-31.3		
10340.00	1.2	H	3.0	40.7	1.0	-38.4	-25.0	-13.4		
Mid Ch, PCC : 2587.5MHz SCC : 2602.5MHz										
5190.00	-16.4	V	3.0	43.8	1.0	-59.2	-25.0	-34.2		
7785.00	-15.6	V	3.0	42.3	1.0	-56.9	-25.0	-31.9		
10380.00	-4.1	V	3.0	40.7	1.0	-43.8	-25.0	-18.8		
5190.00	-16.1	H	3.0	43.8	1.0	-58.9	-25.0	-33.9		
7785.00	-15.1	H	3.0	42.3	1.0	-56.5	-25.0	-31.5		
10380.00	1.2	H	3.0	40.7	1.0	-38.4	-25.0	-13.4		
High Ch, PCC : 2597.5MHz SCC : 2612.5MHz										
5210.00	-16.5	V	3.0	43.8	1.0	-59.3	-25.0	-34.3		
7815.00	-15.3	V	3.0	42.3	1.0	-56.6	-25.0	-31.6		
10420.00	-4.5	V	3.0	40.7	1.0	-44.1	-25.0	-19.1		
5210.00	-16.5	H	3.0	43.8	1.0	-59.3	-25.0	-34.3		
7815.00	-15.6	H	3.0	42.3	1.0	-56.9	-25.0	-31.9		
10420.00	0.4	H	3.0	40.7	1.0	-39.2	-25.0	-14.2		