



## SISO Antenna-2 Radiated Spurious Emissions Measurements (Above 18GHz)

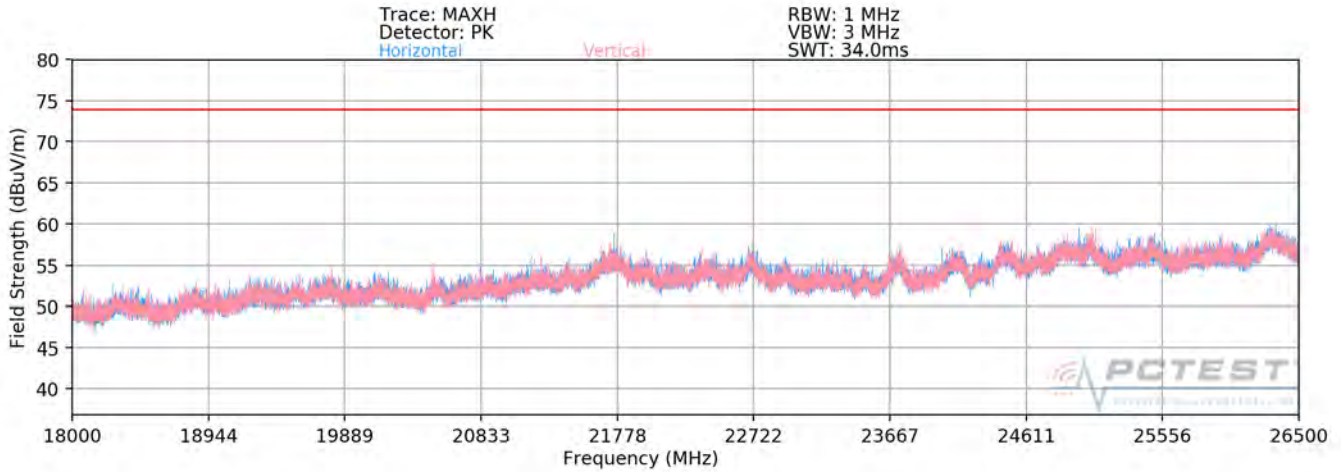

**Plot 7-275. Radiated Spurious Plot above 18GHz - 26.5GHz SISO ANT2 (802.11a)**

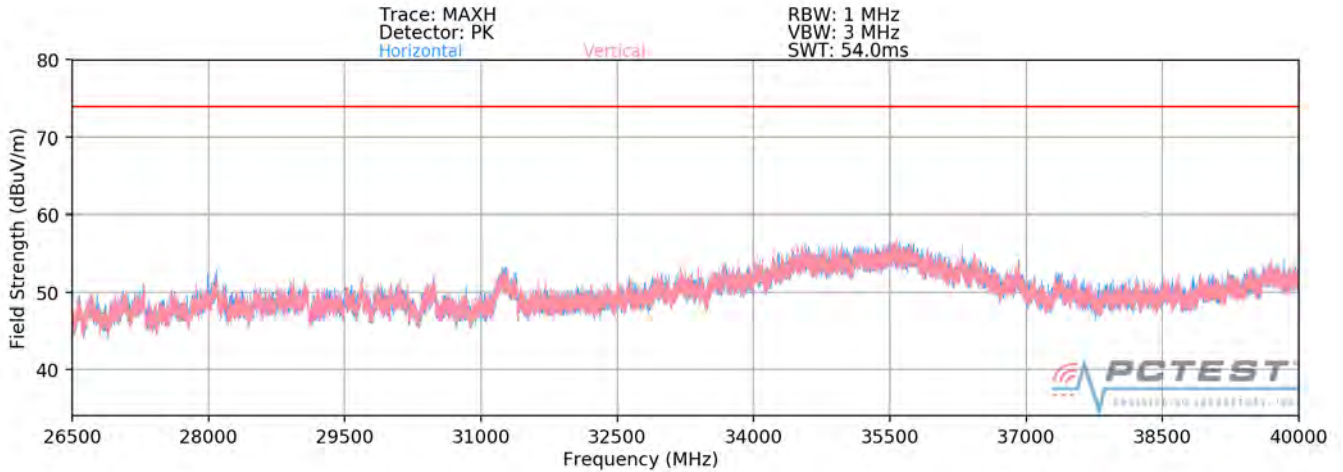

**Plot 7-276. Radiated Spurious Plot 26.5GHz - 40GHz SISO ANT2 (802.11a)**

FCC ID: A3LSMN975U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset		Page 184 of 244

## SISO Antenna-2 Radiated Spurious Emission Measurements

§15.407(b) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5180MHz  
 Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10360.00	Peak	V	225	18	-60.68	15.41	0.00	61.73	68.20	-6.47
* 15540.00	Average	V	-	-	-82.71	22.36	0.00	46.65	53.98	-7.33
* 15540.00	Peak	V	-	-	-70.53	22.36	0.00	58.83	73.98	-15.15
* 20720.00	Average	V	-	-	-78.79	12.82	-9.54	31.49	53.98	-22.49
* 20720.00	Peak	V	-	-	-65.99	12.82	-9.54	44.29	73.98	-29.69
25900.00	Peak	V	-	-	-64.91	13.55	-9.54	46.09	68.20	-22.11

Table 7-47. Radiated Measurements SISO ANT2

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5200MHz  
 Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10400.00	Peak	V	116	351	-61.60	15.50	0.00	60.90	68.20	-7.30
* 15600.00	Average	V	-	-	-82.54	22.52	0.00	46.98	53.98	-7.00
* 15600.00	Peak	V	-	-	-71.70	22.52	0.00	57.82	73.98	-16.16
* 20800.00	Average	V	-	-	-78.25	12.85	-9.54	32.06	53.98	-21.92
* 20800.00	Peak	V	-	-	-66.02	12.85	-9.54	44.29	73.98	-29.69
26000.00	Peak	V	-	-	-65.15	13.71	-9.54	46.02	68.20	-22.18

Table 7-48. Radiated Measurements SISO ANT2

FCC ID: A3LSMN975U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 185 of 244	

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5240MHz  
 Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10480.00	Peak	V	111	364	-63.67	15.49	0.00	58.82	68.20	-9.38
* 15720.00	Average	V	-	-	-83.27	22.76	0.00	46.49	53.98	-7.49
* 15720.00	Peak	V	-	-	-70.06	22.76	0.00	59.70	73.98	-14.28
* 20960.00	Average	V	-	-	-78.42	12.93	-9.54	31.96	53.98	-22.01
* 20960.00	Peak	V	-	-	-66.76	12.93	-9.54	43.63	73.98	-30.35
26200.00	Peak	V	-	-	-68.15	13.60	-9.54	42.91	68.20	-25.29

**Table 7-49. Radiated Measurements SISO ANT2**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5180MHz  
 Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10360.00	Peak	V	102	342	-61.45	15.41	0.00	60.96	68.20	-7.24
* 15540.00	Average	V	-	-	-82.83	22.36	0.00	46.53	53.98	-7.45
* 15540.00	Peak	V	-	-	-70.07	22.36	0.00	59.29	73.98	-14.69
* 20720.00	Average	V	-	-	-79.01	12.82	-9.54	31.49	53.98	-22.49
* 20720.00	Peak	V	-	-	-66.13	12.82	-9.54	44.29	73.98	-29.69
25900.00	Peak	V	-	-	-65.11	13.55	-9.54	46.09	68.20	-22.11

**Table 7-50. Radiated Measurements SISO ANT2 with WCP**

FCC ID: A3LSMN975U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 186 of 244	

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5260MHz  
 Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	V	111	8	-64.73	13.15	0.00	55.42	68.20	-12.78
* 15780.00	Average	V	-	-	-82.71	16.11	0.00	40.40	53.98	-13.58
* 15780.00	Peak	V	-	-	-70.08	16.11	0.00	53.03	73.98	-20.95
* 21040.00	Average	V	-	-	-78.48	12.94	-9.54	31.93	53.98	-22.05
* 21040.00	Peak	V	-	-	-67.28	12.94	-9.54	43.12	73.98	-30.86
26300.00	Peak	V	-	-	-67.86	14.07	-9.54	43.67	68.20	-24.53

**Table 7-51. Radiated Measurements SISO ANT2**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5280MHz  
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	V	116	4	-66.37	15.95	0.00	56.58	68.20	-11.62
* 15840.00	Average	V	-	-	-83.19	23.15	0.00	46.96	53.98	-7.02
* 15840.00	Peak	V	-	-	-71.05	23.15	0.00	59.10	73.98	-14.88
* 21120.00	Average	V	-	-	-78.66	13.10	-9.54	31.89	53.98	-22.09
* 21120.00	Peak	V	-	-	-67.22	13.10	-9.54	43.34	73.98	-30.64
26400.00	Peak	V	-	-	-67.36	13.79	-9.54	43.89	68.20	-24.31

**Table 7-52. Radiated Measurements SISO ANT2**

FCC ID: A3LSMN975U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 187 of 244	

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5320MHz  
 Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	Average	V	108	351	-80.48	16.08	0.00	42.60	53.98	-11.38
* 10640.00	Peak	V	108	351	-66.92	16.08	0.00	56.16	73.98	-17.82
* 15960.00	Average	V	-	-	-83.30	23.20	0.00	46.90	53.98	-7.08
* 15960.00	Peak	V	-	-	-71.25	23.20	0.00	58.95	73.98	-15.03
* 21280.00	Average	V	-	-	-78.67	13.24	-9.54	32.03	53.98	-21.94
* 21280.00	Peak	V	-	-	-65.97	13.24	-9.54	44.74	73.98	-29.24
26600.00	Peak	V	150	1	-49.30	1.04	-9.54	49.20	68.20	-19.00

**Table 7-53. Radiated Measurements SISO ANT2**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5260MHz  
 Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	V	102	342	-65.11	15.68	0.00	57.57	68.20	-10.63
* 15780.00	Average	V	-	-	-82.90	22.73	0.00	46.83	53.98	-7.15
* 15780.00	Peak	V	-	-	-70.93	22.73	0.00	58.80	73.98	-15.18
* 21040.00	Average	V	-	-	-78.66	12.94	-9.54	31.74	53.98	-22.24
* 21040.00	Peak	V	-	-	-67.51	12.94	-9.54	42.89	73.98	-31.09
26300.00	Peak	V	-	-	-68.01	14.07	-9.54	43.52	68.20	-24.68

**Table 7-54. Radiated Measurements SISO ANT2 with WCP**

FCC ID: A3LSMN975U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 188 of 244	

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5500MHz  
 Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	Average	V	106	18	-80.20	17.05	0.00	43.85	53.98	-10.13
* 11000.00	Peak	V	106	18	-67.99	17.05	0.00	56.06	73.98	-17.92
16500.00	Peak	V	-	-	-83.22	24.58	0.00	48.36	68.20	-19.84
22000.00	Peak	V	-	-	-68.69	13.66	-9.54	42.43	68.20	-25.77
27500.00	Peak	V	150	44	-44.77	0.09	-9.54	52.78	68.20	-15.42

**Table 7-55. Radiated Measurements SISO ANT2**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5600MHz  
 Channel: 120

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11200.00	Average	V	163	28	-80.89	16.62	0.00	42.73	53.98	-11.25
* 11200.00	Peak	V	163	28	-68.68	16.62	0.00	54.94	73.98	-19.04
16800.00	Peak	V	-	-	-72.13	24.32	0.00	59.19	68.20	-9.01
* 22400.00	Average	V	-	-	-80.73	13.91	-9.54	30.63	53.98	-23.35
* 22400.00	Peak	V	-	-	-69.70	13.91	-9.54	41.66	73.98	-32.32
28000.00	Peak	V	-	-	-48.78	1.57	-9.54	50.25	68.20	-17.95

**Table 7-56. Radiated Measurements SISO ANT2**

FCC ID: A3LSMN975U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 189 of 244	

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5720MHz  
 Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11440.00	Average	V	-	-	-82.59	17.60	0.00	42.01	53.98	-11.97
* 11440.00	Peak	V	-	-	-69.53	17.60	0.00	55.07	73.98	-18.91
17160.00	Peak	V	-	-	-70.86	24.61	0.00	60.75	68.20	-7.45
* 22880.00	Average	V	-	-	-80.36	13.77	-9.54	30.87	53.98	-23.11
* 22880.00	Peak	V	-	-	-69.19	13.77	-9.54	42.03	73.98	-31.95
28600.00	Peak	V	-	-	-48.15	0.11	-9.54	49.41	68.20	-18.79

**Table 7-57. Radiated Measurements SISO ANT2**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5720MHz  
 Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11440.00	Average	V	-	-	-83.01	17.60	0.00	41.59	53.98	-12.39
* 11440.00	Peak	V	-	-	-70.46	17.60	0.00	54.14	73.98	-19.84
17160.00	Peak	V	-	-	-70.46	24.61	0.00	61.15	68.20	-7.05
* 16500.00	Average	V	-	-	-80.21	13.77	0.00	40.56	53.98	-13.42
* 16500.00	Peak	V	-	-	-69.43	13.77	0.00	51.34	73.98	-22.64
27500.00	Peak	V	-	-	-48.51	0.11	-9.54	49.05	68.20	-19.15

**Table 7-58. Radiated Measurements SISO ANT2 with WCP**

FCC ID: A3LSMN975U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 190 of 244	

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5745MHz  
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11490.00	Average	V	101	20	-81.73	17.49	0.00	42.76	53.98	-11.22
* 11490.00	Peak	V	101	20	-69.15	17.49	0.00	55.34	73.98	-18.64
17235.00	Peak	V	-	-	-71.03	25.28	0.00	61.25	68.20	-6.95
* 22980.00	Average	V	-	-	-79.53	14.00	-9.54	31.92	53.98	-22.06
* 22980.00	Peak	V	-	-	-68.63	14.00	-9.54	42.83	73.98	-31.15
28725.00	Peak	V	-	-	-52.32	0.50	-9.54	45.63	68.20	-22.57

**Table 7-59. Radiated Measurements SISO ANT2**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5785MHz  
 Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11570.00	Average	V	190	20	-80.16	17.65	0.00	44.49	53.98	-9.49
* 11570.00	Peak	V	190	20	-67.14	17.65	0.00	57.51	73.98	-16.47
17355.00	Peak	V	-	-	-70.78	26.38	0.00	62.60	68.20	-5.60
23140.00	Peak	V	-	-	-68.93	13.79	-9.54	42.32	68.20	-25.88
28925.00	Peak	V	-	-	-47.80	1.35	-9.54	51.00	68.20	-17.20

**Table 7-60. Radiated Measurements SISO ANT2**

FCC ID: A3LSMN975U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08-A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset		Page 191 of 244

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	V	183	25	-78.22	17.61	0.00	46.39	53.98	-7.59
* 11650.00	Peak	V	183	25	-66.02	17.61	0.00	58.59	73.98	-15.39
17475.00	Peak	V	-	-	-71.62	26.04	0.00	61.42	68.20	-6.78
23300.00	Peak	V	-	-	-68.62	13.33	-9.54	42.17	68.20	-26.03
29125.00	Peak	V	-	-	-47.31	-0.91	-9.54	49.24	68.20	-18.96

**Table 7-61. Radiated Measurements SISO ANT2**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5785MHz  
 Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11570.00	Average	V	-	-	-82.77	17.65	0.00	41.88	53.98	-12.10
* 11570.00	Peak	V	-	-	-71.00	17.65	0.00	53.65	73.98	-20.33
17355.00	Peak	V	-	-	-83.66	26.38	0.00	49.72	68.20	-18.48
23140.00	Peak	V	-	-	-69.02	13.79	-9.54	42.32	68.20	-25.88
28925.00	Peak	V	-	-	-48.05	1.35	-9.54	51.00	68.20	-17.20

**Table 7-62. Radiated Measurements SISO ANT2 with WCP**

FCC ID: A3LSMN975U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 192 of 244	

### 7.6.3 MIMO/CDD Radiated Spurious Emission Measurements

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5180MHz  
 Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	Peak	H	113	359	-57.61	12.53	0.00	61.92	68.20	-6.28
* 15540.00	Average	H	382	34	-78.44	15.14	0.00	43.70	53.98	-10.28
* 15540.00	Peak	H	382	34	-64.74	15.14	0.00	57.40	73.98	-16.58
* 20720.00	Average	H	-	-	-71.86	12.82	-9.54	38.42	53.98	-15.56
* 20720.00	Peak	H	-	-	-60.09	12.82	-9.54	50.19	73.98	-23.79
25900.00	Peak	H	-	-	-57.59	13.55	-9.54	53.41	68.20	-14.79

**Table 7-63. Radiated Measurements MIMO/CDD**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5200MHz  
 Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	Peak	H	115	356	-60.24	12.41	0.00	59.17	68.20	-9.03
* 15600.00	Average	H	383	22	-79.27	15.35	0.00	43.08	53.98	-10.90
* 15600.00	Peak	H	383	22	-66.39	15.35	0.00	55.96	73.98	-18.02
* 20800.00	Average	H	-	-	-71.24	12.85	-9.54	39.07	53.98	-14.91
* 20800.00	Peak	H	-	-	-59.16	12.85	-9.54	51.15	73.98	-22.83
26000.00	Peak	H	-	-	-57.90	13.71	-9.54	53.27	68.20	-14.93

**Table 7-64. Radiated Measurements MIMO/CDD**

FCC ID: A3LSMN975U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 193 of 244	

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5240MHz  
 Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	H	112	10	-61.12	12.50	0.00	58.38	68.20	-9.82
* 15720.00	Average	H	224	37	-79.69	16.80	0.00	44.11	53.98	-9.87
* 15720.00	Peak	H	224	37	-67.37	16.80	0.00	56.43	73.98	-17.55
* 20960.00	Average	H	-	-	-72.17	12.93	-9.54	38.21	53.98	-15.76
* 20960.00	Peak	H	-	-	-59.24	12.93	-9.54	51.14	73.98	-22.83
26200.00	Peak	H	-	51	-58.32	13.60	-9.54	52.74	68.20	-15.46

**Table 7-65. Radiated Measurements MIMO/CDD**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5180MHz  
 Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	Peak	H	133	14	-59.61	12.53	0.00	59.92	68.20	-8.28
* 15540.00	Average	H	356	21	-79.01	15.14	0.00	43.13	53.98	-10.85
* 15540.00	Peak	H	356	21	-65.99	15.14	0.00	56.15	73.98	-17.83
* 20720.00	Average	H	-	-	-72.08	12.82	-9.54	38.20	53.98	-15.78
* 20720.00	Peak	H	-	-	-60.15	12.82	-9.54	50.13	73.98	-23.85
25900.00	Peak	H	-	-	-57.91	13.55	-9.54	53.09	68.20	-15.11

**Table 7-66. Radiated Measurements MIMO/CDD with WCP**

FCC ID: A3LSMN975U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 194 of 244	

Worst Case Mode: 802.11a  
Worst Case Transfer Rate: 6Mbps  
Distance of Measurements: 1 & 3 Meters  
Operating Frequency: 5260MHz  
Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	H	111	369	-62.31	13.15	0.00	57.84	68.20	-10.36
* 15780.00	Average	H	369	34	-81.04	16.11	0.00	42.07	53.98	-11.91
* 15780.00	Peak	H	369	34	-69.07	16.11	0.00	54.04	73.98	-19.94
* 21040.00	Average	H	-	-	-69.89	12.94	-9.54	40.51	53.98	-13.47
* 21040.00	Peak	H	-	-	-57.23	12.94	-9.54	53.17	73.98	-20.81
26300.00	Peak	H	-	-	-52.46	14.07	-9.54	59.07	68.20	-9.13

**Table 7-67. Radiated Measurements MIMO/CDD**

Worst Case Mode: 802.11a  
Worst Case Transfer Rate: 6Mbps  
Distance of Measurements: 1 & 3 Meters  
Operating Frequency: 5280MHz  
Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	H	112	15	-60.78	13.67	0.00	59.89	68.20	-8.31
* 15840.00	Average	H	368	21	-80.20	15.45	0.00	42.25	53.98	-11.73
* 15840.00	Peak	H	368	21	-67.92	15.45	0.00	54.53	73.98	-19.45
* 21120.00	Average	H	-	-	-70.21	13.10	-9.54	40.35	53.98	-13.63
* 21120.00	Peak	H	-	-	-57.10	13.10	-9.54	53.46	73.98	-20.52
26400.00	Peak	H	-	-	-52.33	13.79	-9.54	58.92	68.20	-9.28

**Table 7-68. Radiated Measurements MIMO/CDD**

FCC ID: A3LSMN975U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 195 of 244	

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5320MHz  
 Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	Average	H	113	13	-73.77	14.01	0.00	47.24	53.98	-6.74
* 10640.00	Peak	H	113	13	-60.11	14.01	0.00	60.90	73.98	-13.08
* 15960.00	Average	H	273	27	-80.30	15.52	0.00	42.22	53.98	-11.76
* 15960.00	Peak	H	273	27	-67.90	15.52	0.00	54.62	73.98	-19.36
* 21280.00	Average	H	-	-	-71.00	13.24	-9.54	39.70	53.98	-14.28
* 21280.00	Peak	H	-	-	-56.28	13.24	-9.54	54.42	73.98	-19.56
26600.00	Peak	H	-	-	-51.20	1.04	-9.54	47.29	68.20	-20.91

**Table 7-69. Radiated Measurements MIMO/CDD**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5320MHz  
 Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	Average	H	125	19	-75.61	14.01	0.00	45.40	53.98	-8.58
* 10640.00	Peak	H	125	19	-61.11	14.01	0.00	59.90	73.98	-14.08
* 15960.00	Average	H	251	35	-80.89	15.52	0.00	41.63	53.98	-12.35
* 15960.00	Peak	H	251	35	-68.88	15.52	0.00	53.64	73.98	-20.34
* 21280.00	Average	H	-	-	-71.13	13.24	-9.54	39.57	53.98	-14.41
* 21280.00	Peak	H	-	-	-56.52	13.24	-9.54	54.18	73.98	-19.80
26600.00	Peak	H	-	-	-51.34	1.04	-9.54	47.15	68.20	-21.05

**Table 7-70. Radiated Measurements MIMO/CDD with WCP**

FCC ID: A3LSMN975U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 196 of 244	

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5500MHz  
 Channel: 100

Frequency [MHz]	Detector	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	Average	308	3	-71.14	13.97	0.00	49.83	53.98	-4.15
* 11000.00	Peak	308	3	-60.46	13.97	0.00	60.51	73.98	-13.47
16500.00	Peak	223	0	-68.59	16.35	0.00	54.76	68.20	-13.44
22000.00	Peak	-	-	-59.55	13.66	-9.54	51.57	68.20	-16.63
27500.00	Peak	-	-	-42.57	0.09	-9.54	54.97	68.20	-13.23

**Table 7-71. Radiated Measurements MIMO/CDD**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5600MHz  
 Channel: 120

Frequency [MHz]	Detector	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11200.00	Average	351	6	-73.65	14.01	0.00	47.36	53.98	-6.62
* 11200.00	Peak	351	6	-62.72	14.01	0.00	58.29	73.98	-15.69
16800.00	Peak	248	19	-69.30	17.24	0.00	54.94	68.20	-13.26
* 22400.00	Average	-	-	-70.82	13.91	-9.54	40.54	53.98	-13.44
* 22400.00	Peak	-	-	-58.58	13.91	-9.54	52.78	73.98	-21.20
28000.00	Peak	-	-	-45.21	1.57	-9.54	53.81	68.20	-14.39

**Table 7-72. Radiated Measurements MIMO/CDD**

FCC ID: A3LSMN975U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset		Page 197 of 244	

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5720MHz  
 Channel: 144

Frequency [MHz]	Detector	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11440.00	Average	342	10	-73.96	14.87	0.00	47.91	53.98	-6.07
* 11440.00	Peak	342	10	-62.42	14.87	0.00	59.45	73.98	-14.53
17160.00	Peak	284	358	-69.30	19.17	0.00	56.87	68.20	-11.33
* 22880.00	Average	-	-	-71.88	13.77	-9.54	39.34	53.98	-14.64
* 22880.00	Peak	-	-	-59.75	13.77	-9.54	51.47	73.98	-22.51
28600.00	Peak	-	-	-49.83	0.11	-9.54	47.73	68.20	-20.47

**Table 7-73. Radiated Measurements MIMO/CDD**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5500MHz  
 Channel: 100

Frequency [MHz]	Detector	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	Average	298	7	-72.99	13.97	0.00	47.98	53.98	-6.00
* 11000.00	Peak	298	7	-63.42	13.97	0.00	57.55	73.98	-16.43
16500.00	Peak	213	15	-69.11	16.35	0.00	54.24	68.20	-13.96
22000.00	Peak	-	-	-61.12	13.66	-9.54	50.00	68.20	-18.20
27500.00	Peak	-	-	-43.98	0.09	-9.54	53.56	68.20	-14.64

**Table 7-74. Radiated Measurements MIMO/CDD with WCP**

FCC ID: A3LSMN975U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset		Page 198 of 244	

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5745MHz  
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11490.00	Average	H	354	8	-72.50	14.52	0.00	49.02	53.98	-4.96
* 11490.00	Peak	H	354	8	-60.59	14.52	0.00	60.93	73.98	-13.05
17235.00	Peak	H	228	332	-70.34	19.51	0.00	56.17	68.20	-12.03
* 22980.00	Average	H	-	-	-72.35	14.00	-9.54	39.11	53.98	-14.87
* 22980.00	Peak	H	-	-	-59.84	14.00	-9.54	51.62	73.98	-22.36
28725.00	Peak	H	-	-	-38.99	0.50	-9.54	58.96	69.20	-10.24

**Table 7-75. Radiated Measurements MIMO/CDD**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5785MHz  
 Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11570.00	Average	H	320	16	-72.98	14.79	0.00	48.81	53.98	-5.16
* 11570.00	Peak	H	320	16	-59.67	14.79	0.00	62.12	73.98	-11.85
17355.00	Peak	H	258	356	-71.51	23.18	0.00	58.67	68.20	-9.53
23140.00	Peak	H	-	-	-59.76	13.79	-9.54	51.49	68.20	-16.71
28925.00	Peak	H	-	-	-37.93	1.35	-9.54	60.87	68.20	-7.33

**Table 7-76. Radiated Measurements MIMO/CDD**

FCC ID: A3LSMN975U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 199 of 244	

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	H	353	357	-71.37	15.05	0.00	50.68	53.98	-3.30
* 11650.00	Peak	H	353	357	-58.55	15.05	0.00	63.50	73.98	-10.48
17475.00	Peak	H	-	-	-71.24	22.03	0.00	57.79	68.20	-10.41
23300.00	Peak	H	-	-	-51.11	13.33	-9.54	59.68	68.20	-8.52
29125.00	Peak	H	-	-	-37.98	-0.91	-9.54	58.57	68.20	-9.63

**Table 7-77. Radiated Measurements MIMO/CDD**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	H	341	6	-72.98	15.05	0.00	49.07	53.98	-4.91
* 11650.00	Peak	H	341	6	-60.68	15.05	0.00	61.37	73.98	-12.61
17475.00	Peak	H	-	-	-71.85	22.03	0.00	57.18	68.20	-11.02
23300.00	Peak	H	-	-	-51.58	13.33	-9.54	59.21	68.20	-8.99
29125.00	Peak	H	-	-	-38.33	-0.91	-9.54	58.22	68.20	-9.98

**Table 7-78. Radiated Measurements MIMO/CDD with WCP**


FCC ID: A3LSMN975U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 200 of 244	

### 7.6.4 Simultaneous Tx Radiated Spurious Emissions Measurements


§15.407(b) §15.205 & §15.209; RSS-Gen [8.9]

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1	2
Channel	6	120
Operating Frequency (MHz)	2437	5600
Data Rate (Mbps)	1	6
Mode	802.11b	802.11a

**Table 7-79. Simultaneous Transmission Config-1**

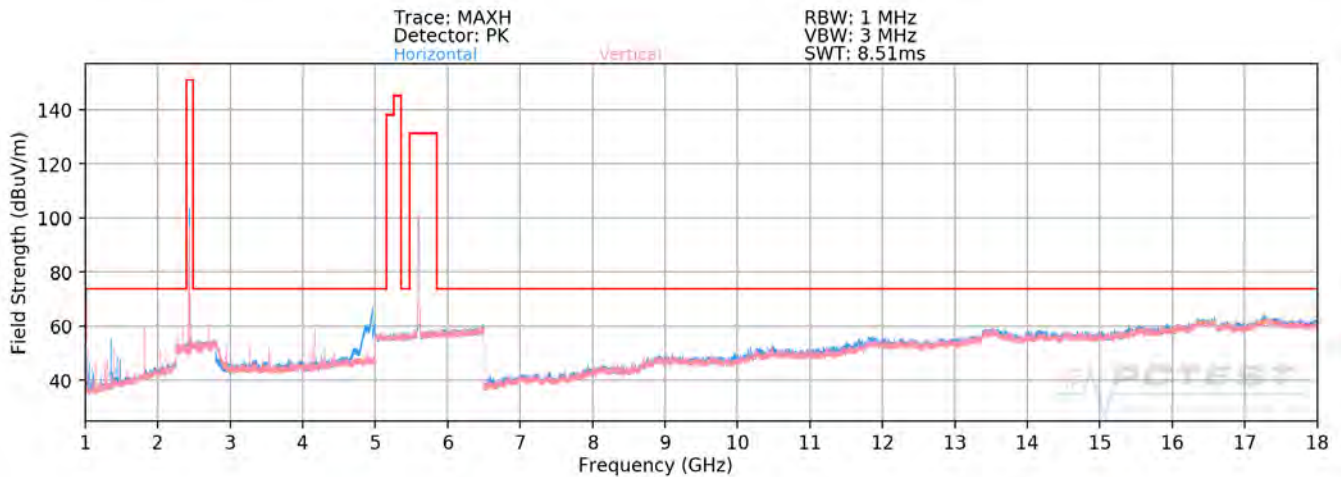


**Plot 7-277. Radiated Spurious Plot above 1GHz (2.4GHz – 5GHz)**

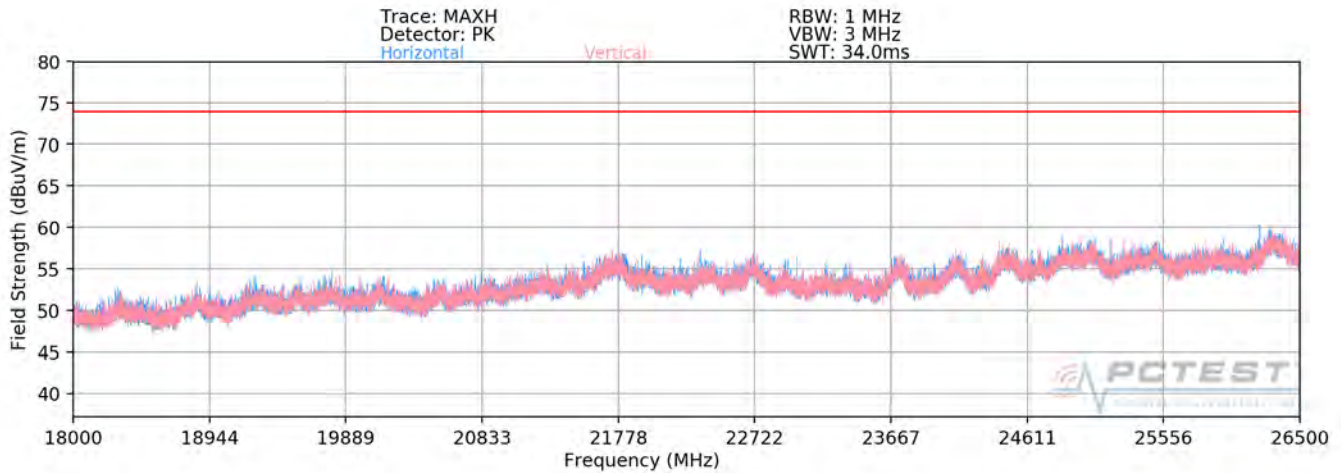

**Plot 7-278. Radiated Spurious Plot 18GHz – 26.5GHz (2.4GHz – 5GHz)**

FCC ID: A3LSMN975U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset		Page 201 of 244

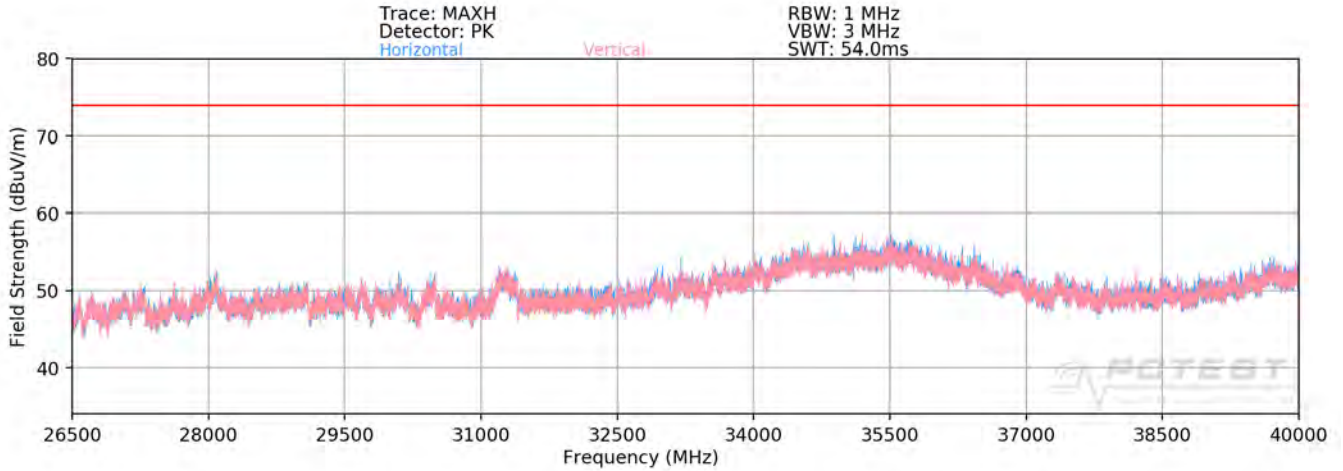


**Plot 7-279. Radiated Spurious Plot above 26.5GHz (2.4GHz – 5GHz)**


FCC ID: A3LSMN975U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 202 of 244	

Description	2.4 GHz Emission	5 GHz Emission
Antenna	2	1
Channel	6	56
Operating Frequency (MHz)	2437	5280
Data Rate (Mbps)	1	6
Mode	802.11b	802.11a

**Table 7-80. Simultaneous Transmission Config-2**

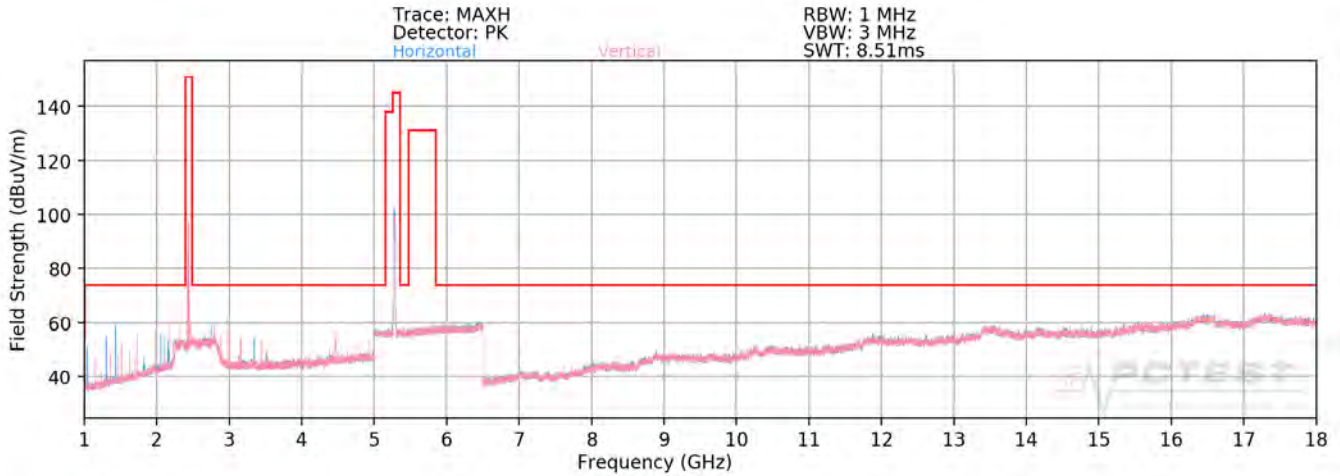


**Plot 7-280. Radiated Spurious Plot above 1GHz (5GHz – 2.4 GHz)**

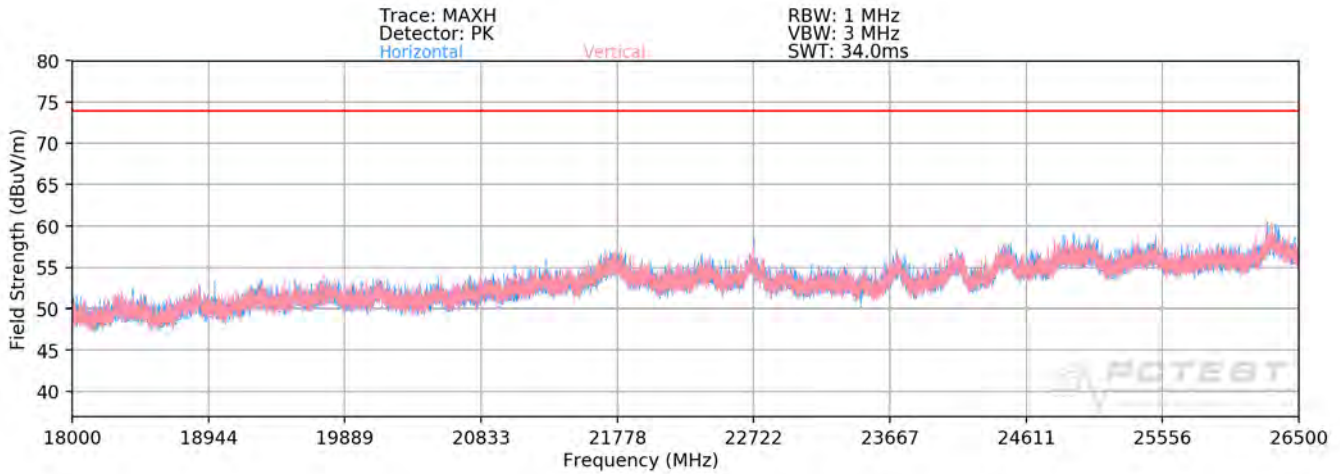

**Plot 7-281. Radiated Spurious Plot 18GHz – 26.5GHz (5GHz – 2.4 GHz)**

FCC ID: A3LSMN975U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset		Page 203 of 244

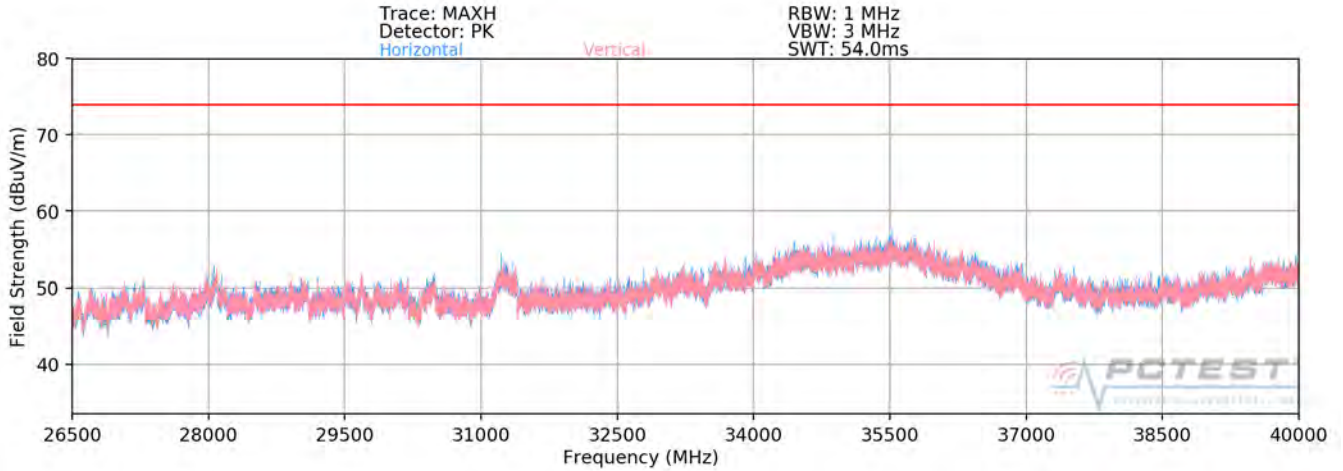


**Plot 7-282. Radiated Spurious Plot above 26.5GHz (5GHz – 2.4 GHz)**


FCC ID: A3LSMN975U	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1905200079-08.A3L	<b>Test Dates:</b> 05/20 - 07/09/2019	<b>EUT Type:</b> Portable Handset	Page 204 of 244	

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1, 2	1, 2
Channel	11	52
Operating Frequency (MHz)	2462	5260
Data Rate (Mbps)	6	6
Mode	802.11g	802.11a

**Table 7-81. Dual Band Simultaneous Transmission**

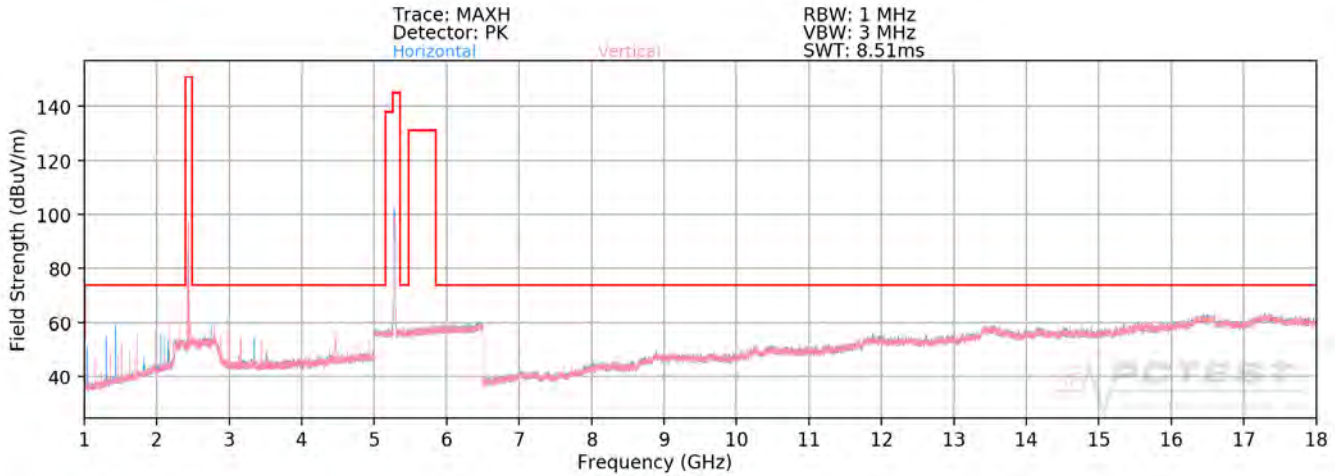


**Plot 7-283. Radiated Spurious Plot above 1GHz (Dual Band Simult. Tx)**

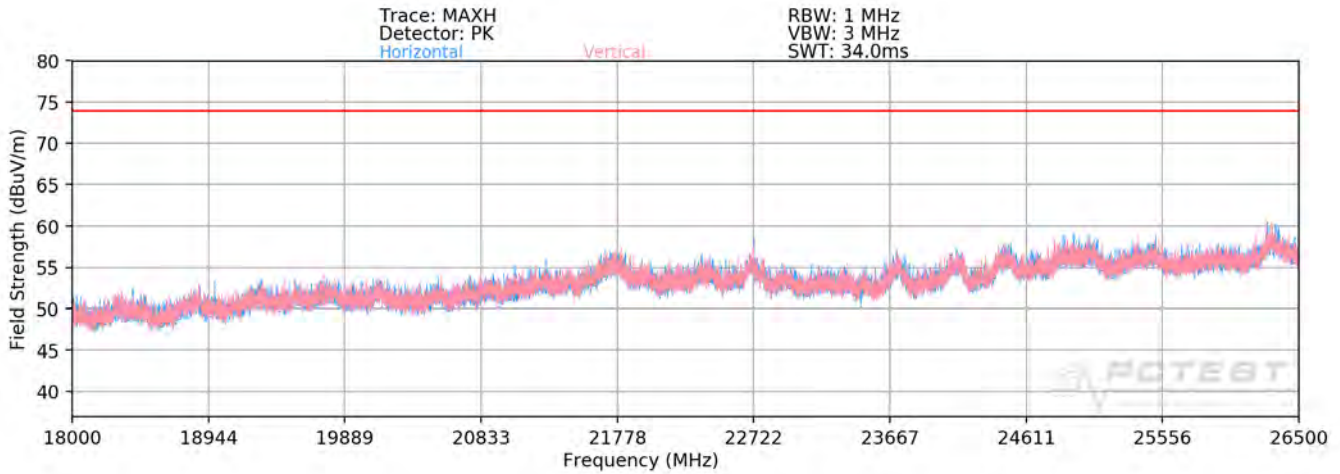

**Plot 7-284. Radiated Spurious Plot 18GHz – 26.5GHz (Dual Band Simult. Tx)**

FCC ID: A3LSMN975U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset		Page 205 of 244

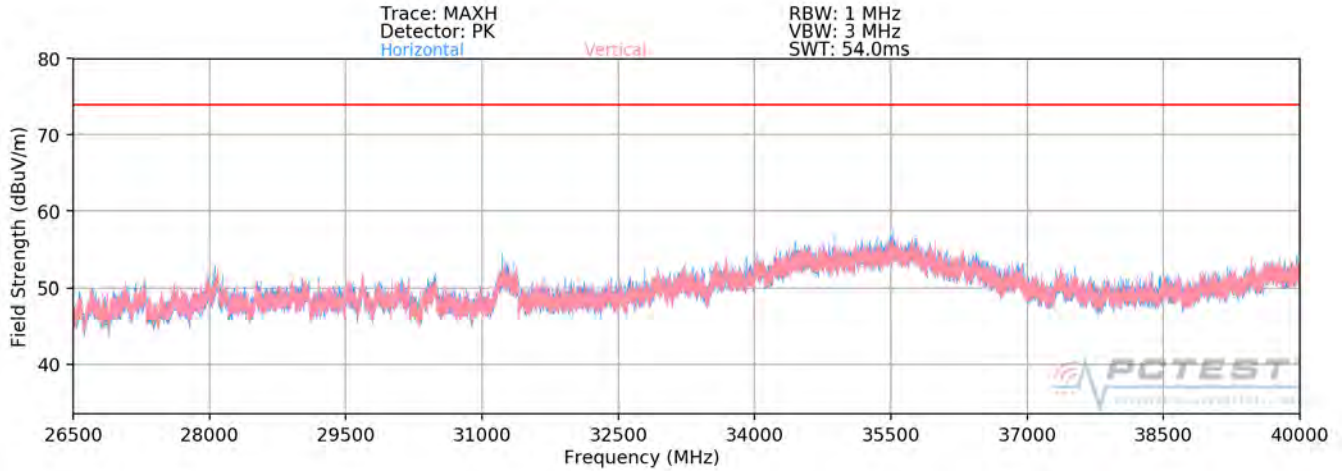


**Plot 7-285. Radiated Spurious Plot above 26.5GHz (Dual Band Simult. Tx)**


FCC ID: A3LSMN975U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 206 of 244	

### 7.6.5 SISO Antenna-1 Radiated Band Edge Measurements (20MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]; RSS-Gen [8.9]

Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5180MHz  
 Channel: 36

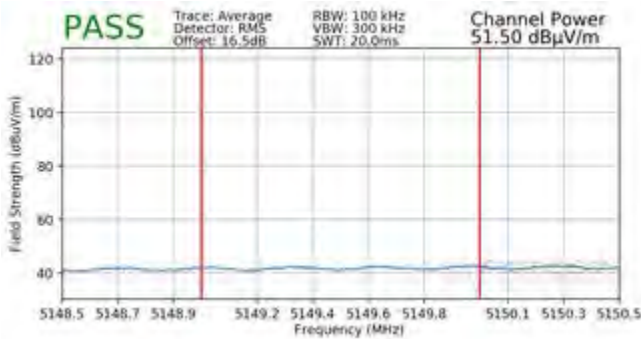


**Plot 7-286. Radiated Lower Band Edge Plot SISO ANT1 (Average – UNII Band 1)**

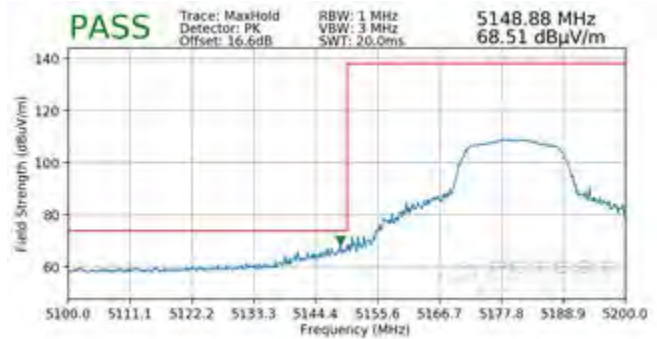


**Plot 7-287. Radiated Lower Band Edge Plot SISO ANT1 (Peak – UNII Band 1)**

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5320MHz  
 Channel: 64

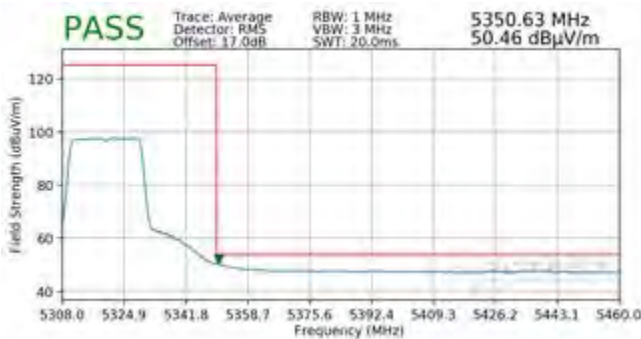


**Plot 7-288. Radiated Upper Band Edge Plot SISO ANT1 (Average – UNII Band 2A)**

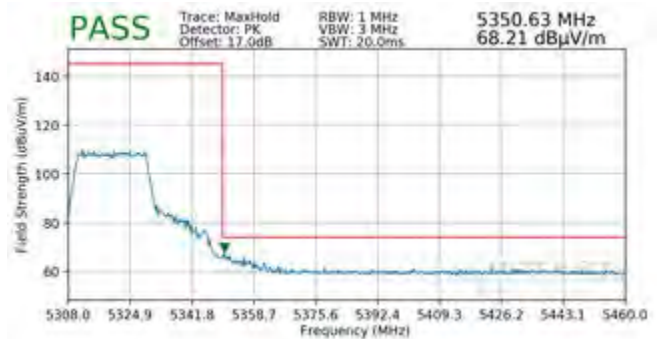


**Plot 7-289. Radiated Upper Band Edge Plot SISO ANT1 (Peak – UNII Band 2A)**

FCC ID: A3LSMN975U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset		Page 207 of 244

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5500MHz  
 Channel: 100

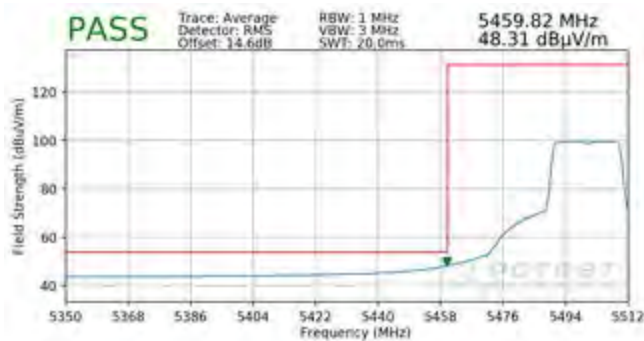


**Plot 7-290. Radiated Lower Band Edge Plot SISO ANT1 (Average – UNII Band 2C)**

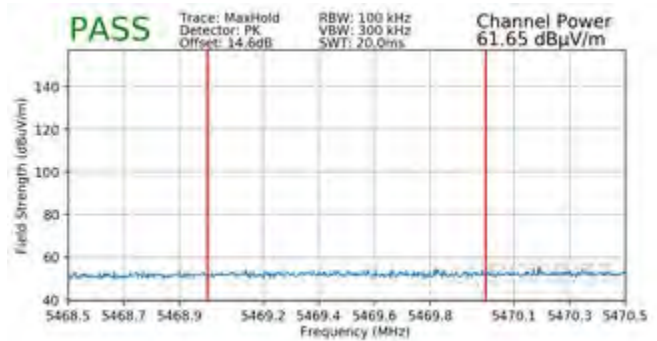

**Plot 7-291. Radiated Lower Band Edge Plot SISO ANT1 (Peak – UNII Band 2C)**

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165

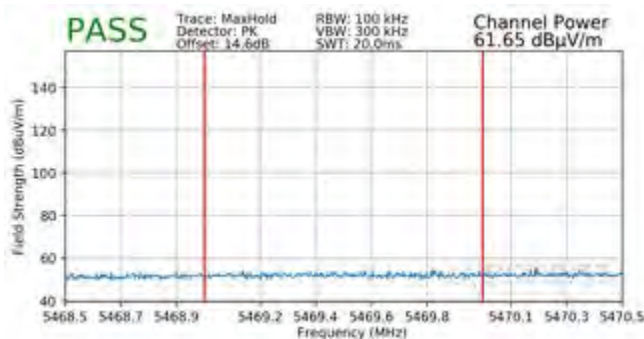


**Plot 7-292. Radiated Upper Band Edge Plot SISO ANT1 (Peak – UNII Band 3)**


FCC ID: A3LSMN975U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset		Page 208 of 244

### 7.6.6 SISO Antenna-1 Radiated Band Edge Measurements (40MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5190MHz  
 Channel: 38

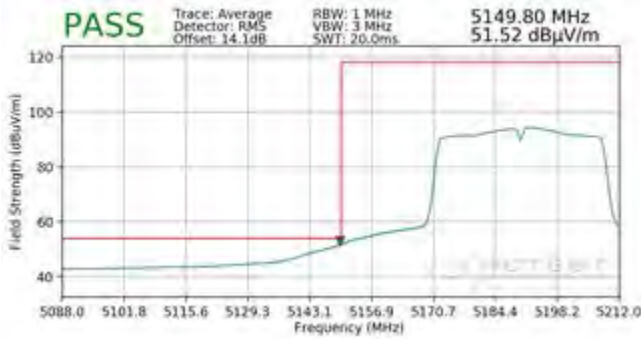


**Plot 7-293. Radiated Lower Band Edge Plot SISO ANT1 (Average – UNII Band 1)**

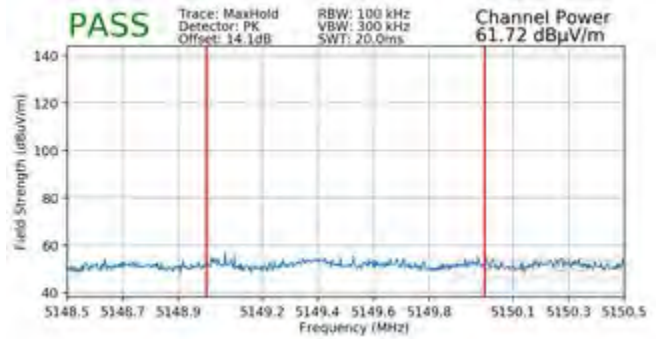


**Plot 7-294. Radiated Lower Band Edge Plot SISO ANT1 (Peak – UNII Band 1)**

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5310MHz  
 Channel: 62

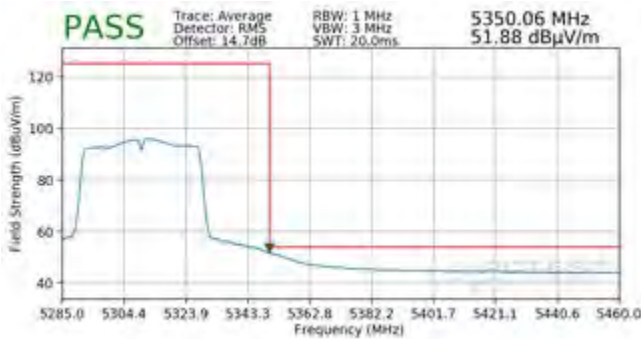

**Plot 7-295. Radiated Upper Band Edge Plot SISO ANT1 (Average – UNII Band 2A)**

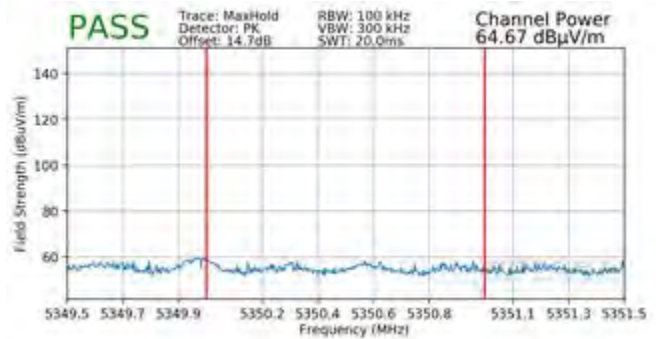


**Plot 7-296. Radiated Upper Band Edge Plot SISO ANT1 (Peak – UNII Band 2A)**

FCC ID: A3LSMN975U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset		Page 209 of 244

Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5510MHz  
 Channel: 102




**Plot 7-297. Radiated Lower Band Edge Plot SISO ANT1 (Average – UNII Band 2C)**

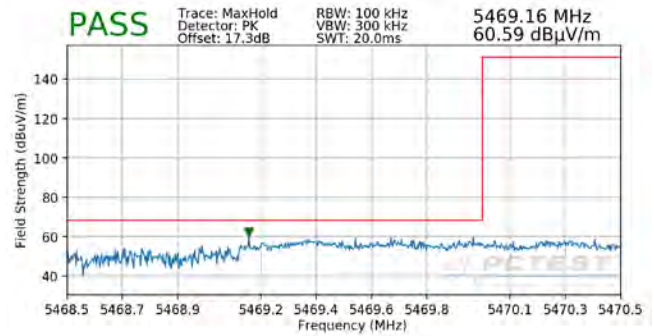

**Plot 7-298. Radiated Lower Band Edge Plot SISO ANT1 (Peak – UNII Band 2C)**

Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5795MHz  
 Channel: 159

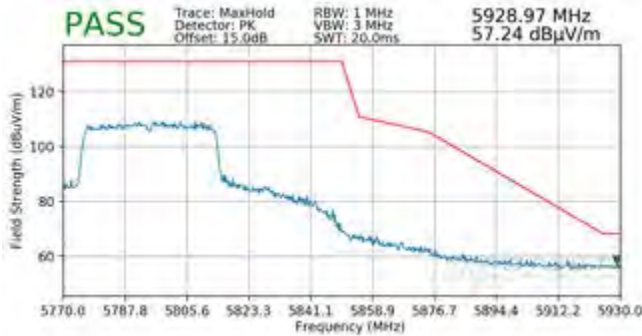


**Plot 7-299. Radiated Upper Band Edge Plot SISO ANT1 (Peak – UNII Band 3)**


FCC ID: A3LSMN975U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset		Page 210 of 244

### 7.6.7 SISO Antenna-1 Radiated Band Edge Measurements (80MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5210MHz
Channel:	42

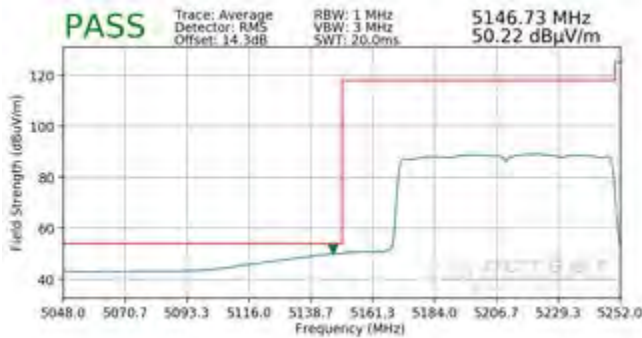


**Plot 7-300. Radiated Lower Band Edge Plot SISO ANT1 (Average – UNII Band 1)**

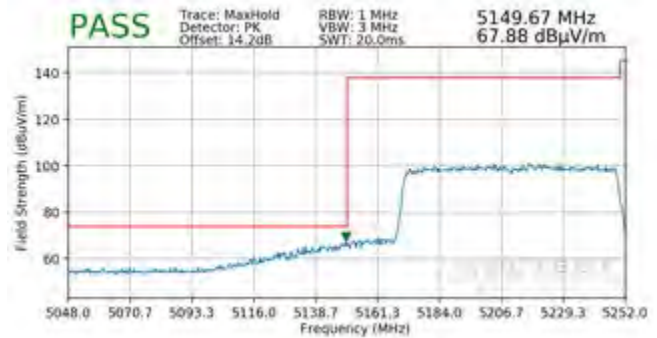


**Plot 7-301. Radiated Lower Band Edge Plot SISO ANT1 (Peak – UNII Band 1)**

Worst Case Mode:	802.11ac
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5290MHz
Channel:	58

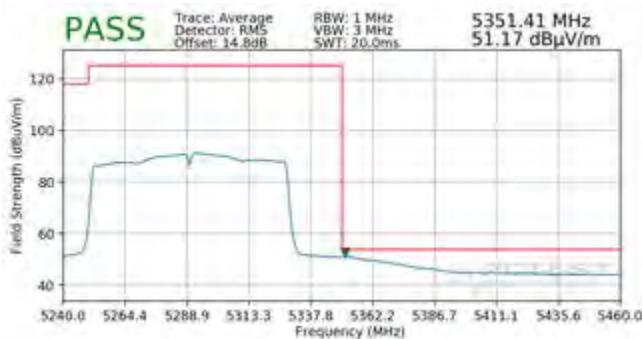


**Plot 7-302. Radiated Upper Band Edge Plot SISO ANT1 (Average – UNII Band 2A)**

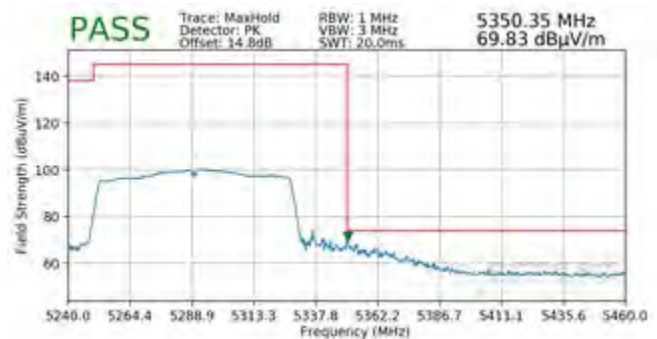


**Plot 7-303. Radiated Upper Band Edge Plot SISO ANT1 (Peak – UNII Band 2A)**

FCC ID: A3LSMN975U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset		Page 211 of 244

Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5530MHz  
 Channel: 106

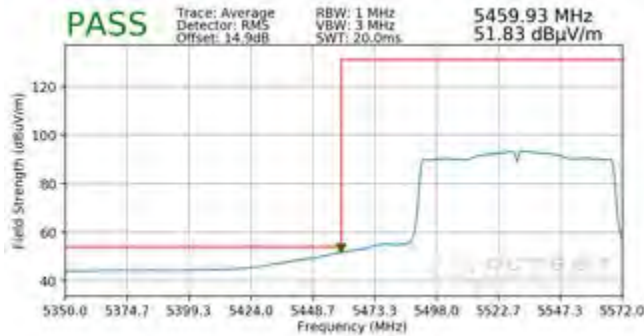


**Plot 7-304. Radiated Lower Band Edge Plot SISO ANT1 (Average – UNII Band 2C)**

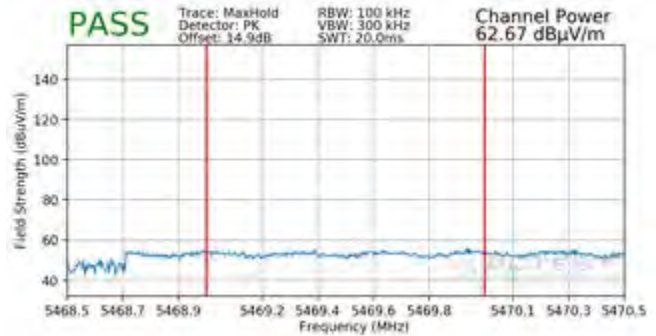

**Plot 7-305. Radiated Lower Band Edge Plot SISO ANT1 (Peak – UNII Band 2C)**

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5775MHz  
 Channel: 155

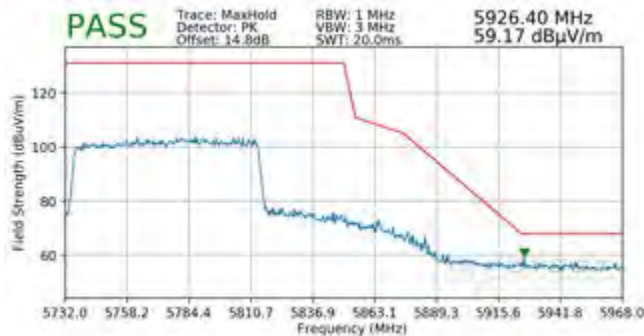


**Plot 7-306. Radiated Upper Band Edge Plot SISO ANT1 (Peak – UNII Band 3)**

FCC ID: A3LSMN975U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset		Page 212 of 244


### 7.6.8 SISO Antenna-2 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5180MHz
Channel:	36

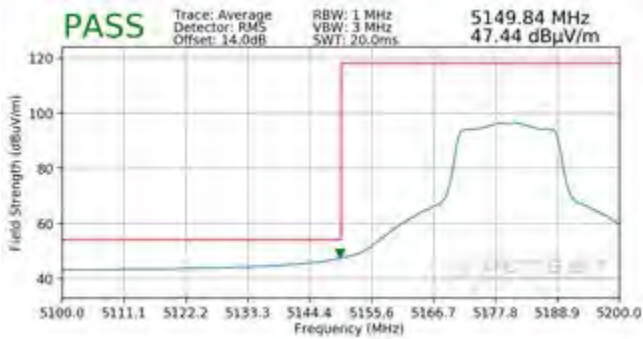


**Plot 7-307. Radiated Lower Band Edge Plot SISO ANT2 (Average – UNII Band 1)**

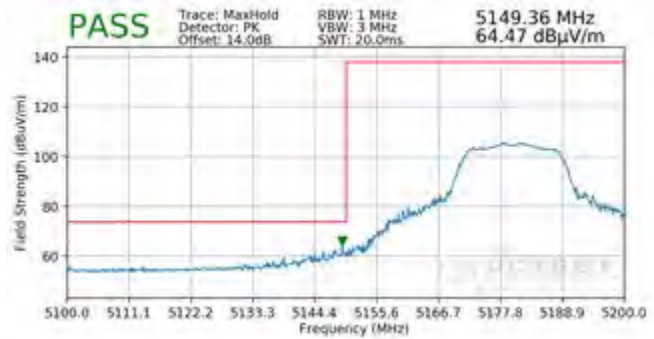


**Plot 7-308. Radiated Lower Band Edge Plot SISO ANT2 (Peak – UNII Band 1)**

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5320MHz
Channel:	64

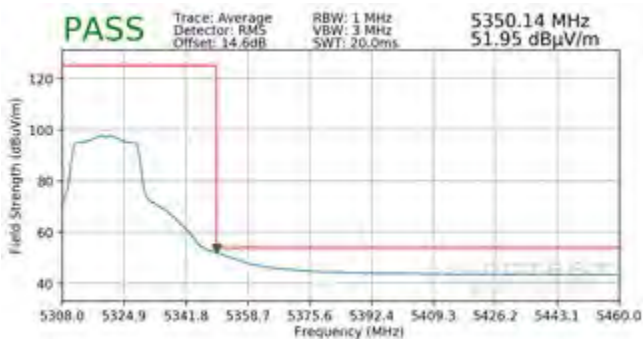


**Plot 7-309. Radiated Upper Band Edge Plot SISO ANT2 (Average – UNII Band 2A)**

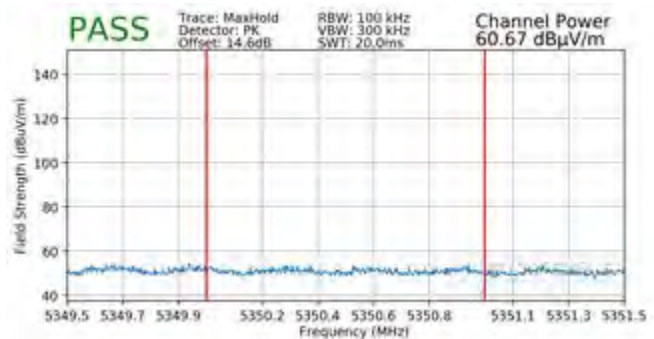


**Plot 7-310. Radiated Upper Band Edge Plot SISO ANT2 (Peak – UNII Band 2A)**

FCC ID: A3LSMN975U			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M1905200079-08-A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 213 of 244	

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5500MHz  
 Channel: 100

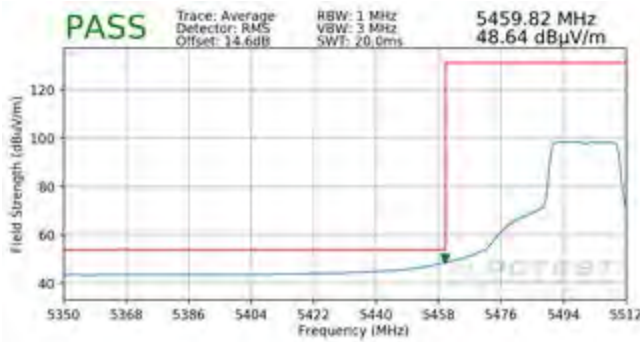


**Plot 7-311. Radiated Lower Band Edge Plot SISO ANT2 (Average – UNII Band 2C)**

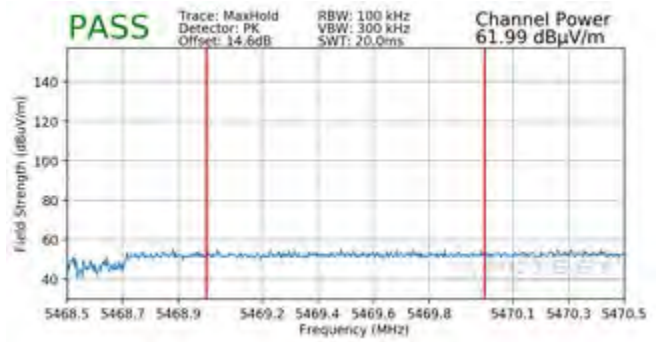

**Plot 7-312. Radiated Lower Band Edge Plot SISO ANT2 (Peak – UNII Band 2C)**

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165

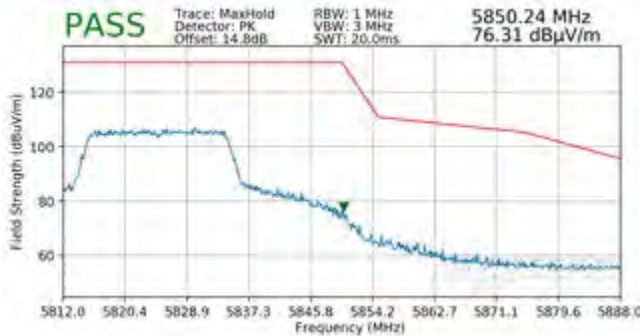


**Plot 7-313. Radiated Upper Band Edge Plot SISO ANT2 (Peak – UNII Band 3)**


FCC ID: A3LSMN975U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 214 of 244

### 7.6.9 SISO Antenna-2 Radiated Band Edge Measurements (40MHz BW) \$15.407(b.1)(b.2) \$15.205 \$15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5190MHz  
 Channel: 38

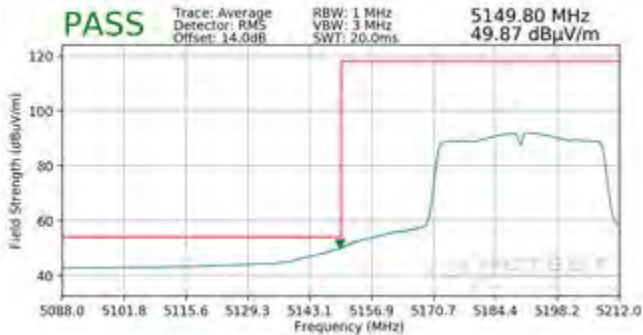


**Plot 7-314. Radiated Lower Band Edge Plot SISO ANT2 (Average – UNII Band 1)**

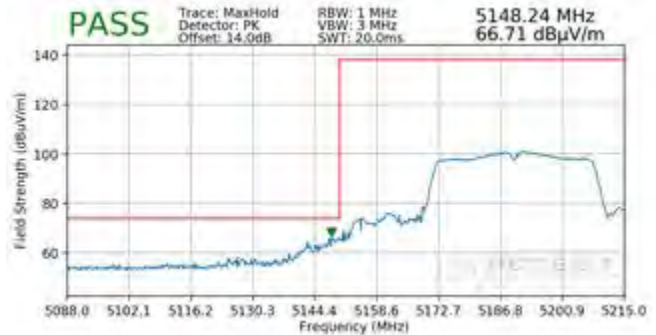


**Plot 7-315. Radiated Lower Band Edge Plot SISO ANT2 (Peak – UNII Band 1)**

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5310MHz  
 Channel: 62

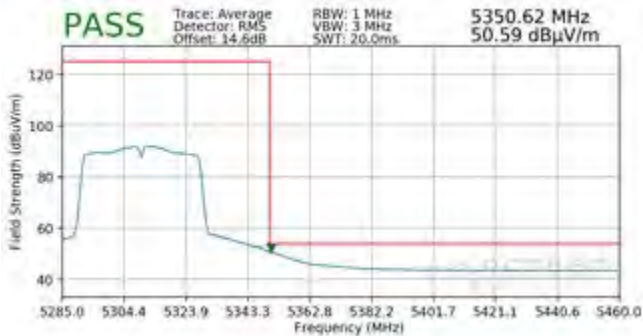


**Plot 7-316. Radiated Upper Band Edge Plot SISO ANT2 (Average – UNII Band 2A)**

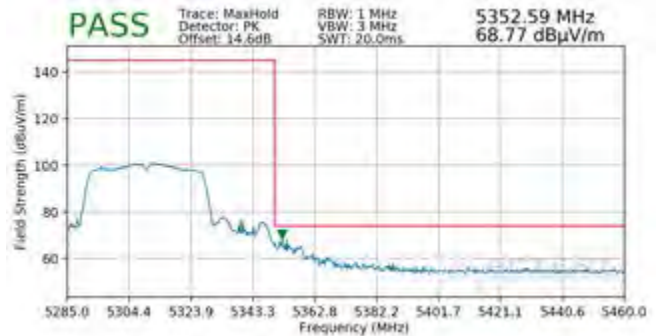


**Plot 7-317. Radiated Upper Band Edge Plot SISO ANT2 (Peak – UNII Band 2A)**

FCC ID: A3LSMN975U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 215 of 244

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5510MHz  
 Channel: 102

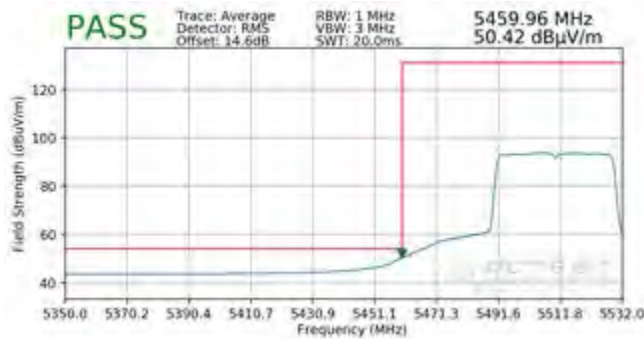


**Plot 7-318. Radiated Lower Band Edge Plot SISO ANT2 (Average – UNII Band 2C)**

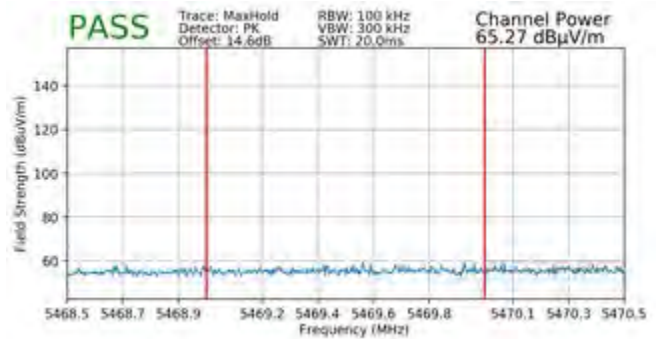

**Plot 7-319. Radiated Lower Band Edge Plot SISO ANT2 (Peak – UNII Band 2C)**

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5795MHz  
 Channel: 159

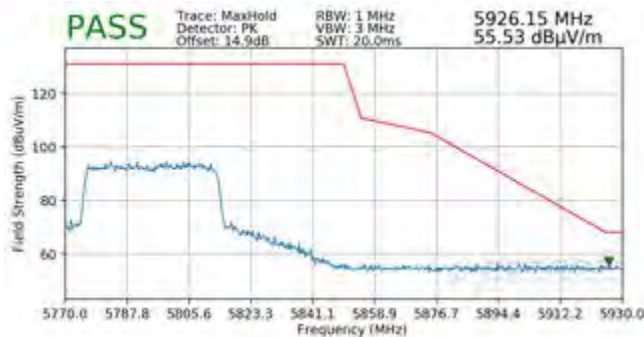


**Plot 7-320. Radiated Upper Band Edge Plot SISO ANT2 (Peak – UNII Band 3)**


FCC ID: A3LSMN975U	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08-A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 216 of 244

### 7.6.10 SISO Antenna-2 Radiated Band Edge Measurements (80MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5210MHz  
 Channel: 42

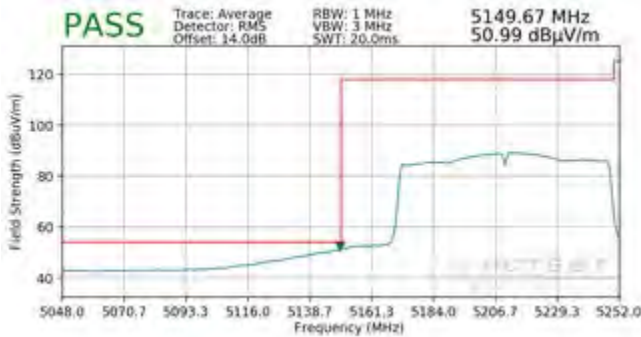


**Plot 7-321. Radiated Lower Band Edge Plot SISO ANT2 (Average – UNII Band 1)**

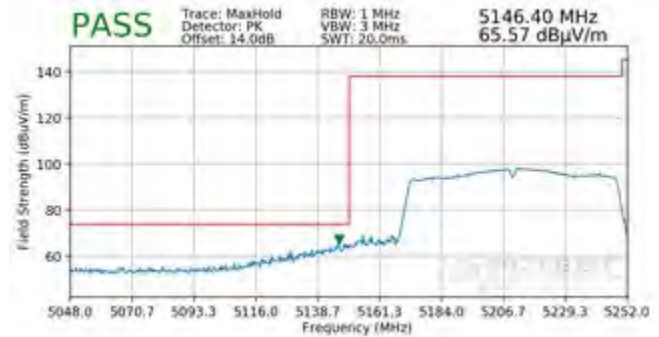


**Plot 7-322. Radiated Lower Band Edge Plot SISO ANT2 (Peak – UNII Band 1)**

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5290MHz  
 Channel: 58

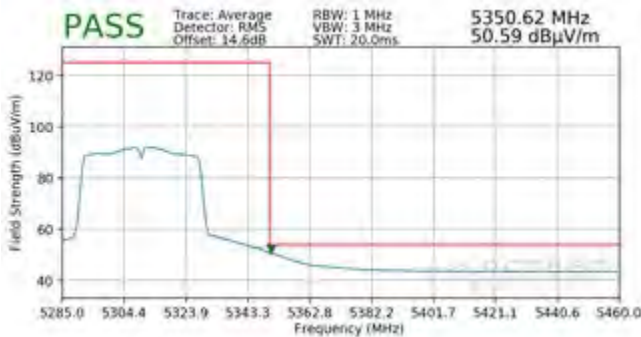


**Plot 7-323. Radiated Upper Band Edge Plot SISO ANT2 (Average – UNII Band 2A)**

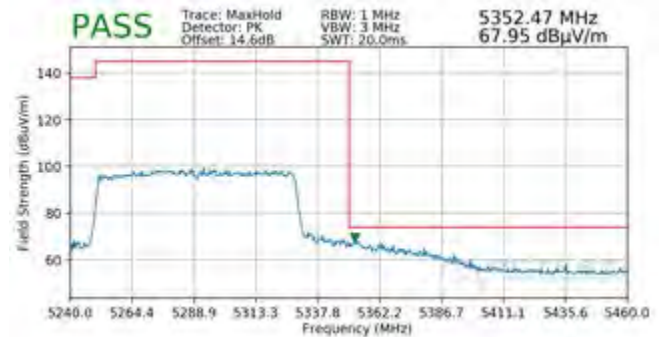


**Plot 7-324. Radiated Upper Band Edge Plot SISO ANT2 (Peak – UNII Band 2A)**

FCC ID: A3LSMN975U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 217 of 244

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5530MHz  
 Channel: 106

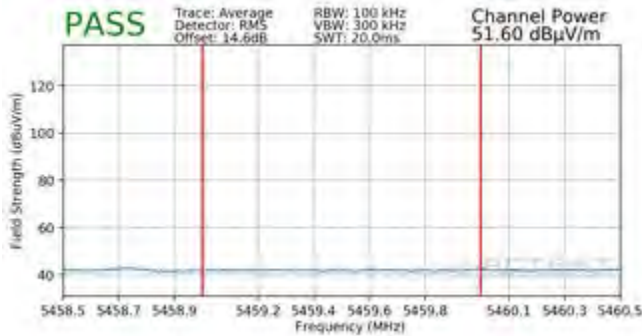


**Plot 7-325. Radiated Lower Band Edge Plot SISO ANT2 (Average – UNII Band 2C)**

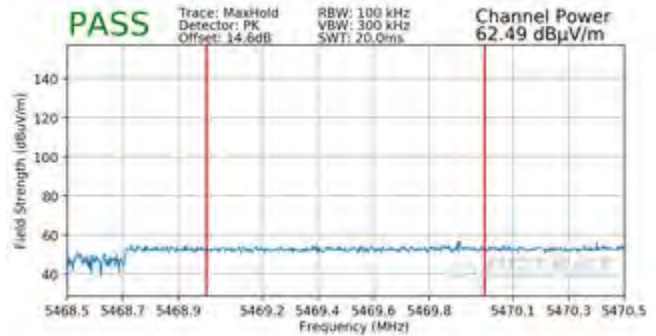

**Plot 7-326. Radiated Lower Band Edge Plot SISO ANT2 (Peak – UNII Band 2C)**

Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5775MHz  
 Channel: 155

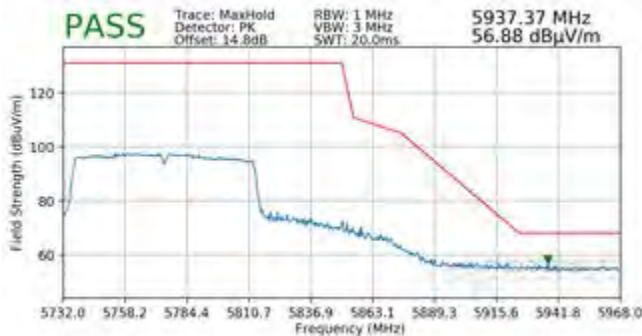


**Plot 7-327. Radiated Upper Band Edge Plot SISO ANT2 (Peak – UNII Band 3)**


FCC ID: A3LSMN975U	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 218 of 244

### 7.6.11 MIMO Radiated Band Edge Measurements (20MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5180MHz  
 Channel: 36

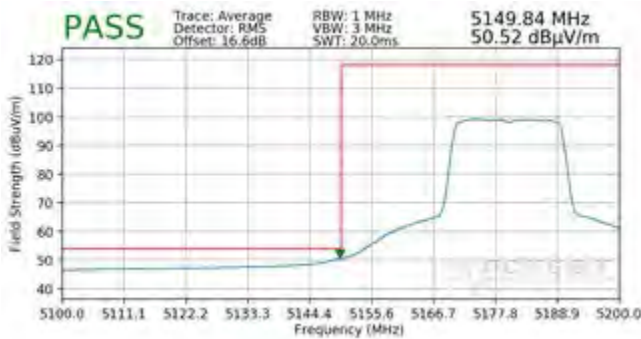


**Plot 7-328. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1)**

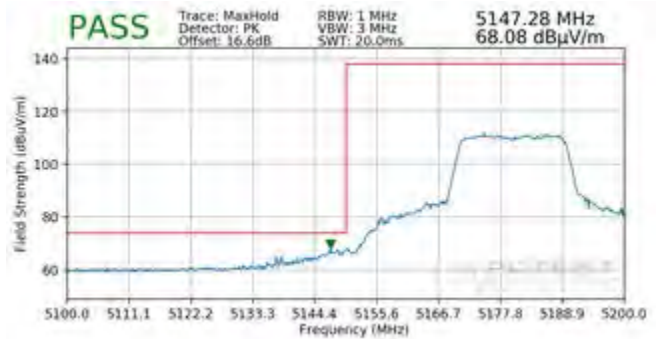


**Plot 7-329. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1)**

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5320MHz  
 Channel: 64

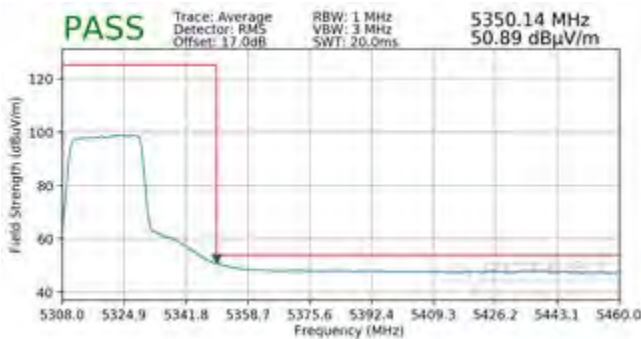


**Plot 7-330. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A)**

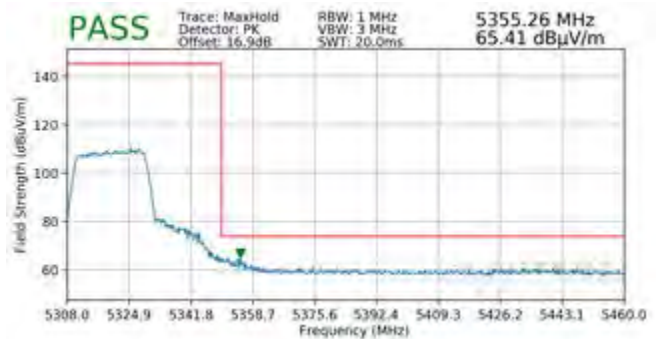


**Plot 7-331. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A)**

FCC ID: A3LSMN975U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 219 of 244

Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5500MHz  
 Channel: 100

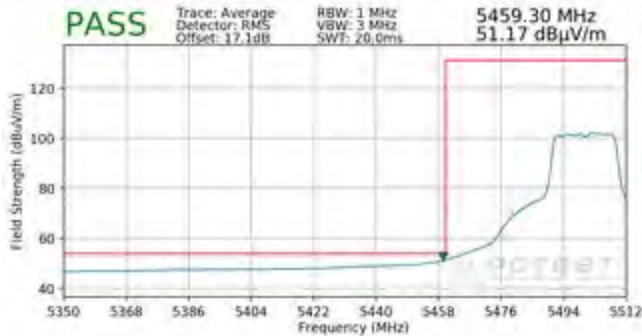


**Plot 7-332. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C)**

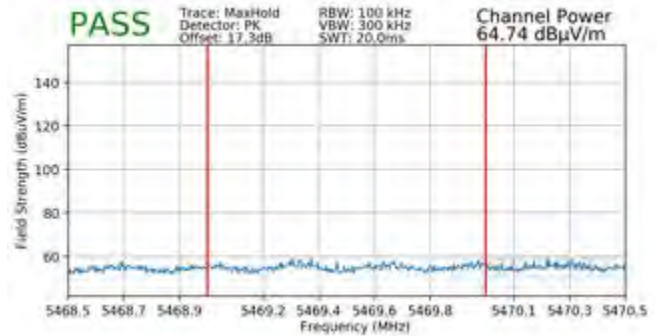

**Plot 7-333. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C)**


Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165

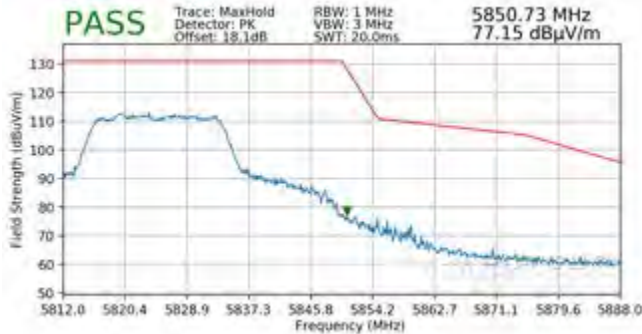


**Plot 7-334. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 3)**

FCC ID: A3LSMN975U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 220 of 244

Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5500MHz  
 Channel: 100

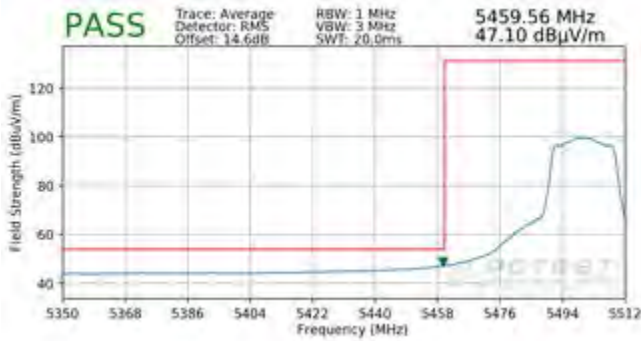

**Plot 7-335. Radiated Band Edge Plot MIMO (Average – WCP)**

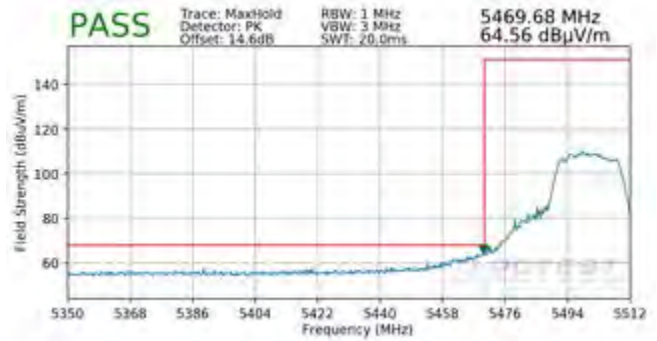


**Plot 7-336. Radiated Band Edge Plot MIMO (Peak – WCP)**


FCC ID: A3LSMN975U	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 221 of 244

### 7.6.12 MIMO Radiated Band Edge Measurements (40MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5190MHz
Channel:	38

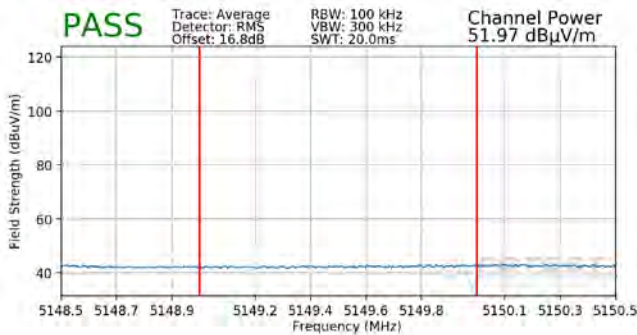


**Plot 7-337. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1)**

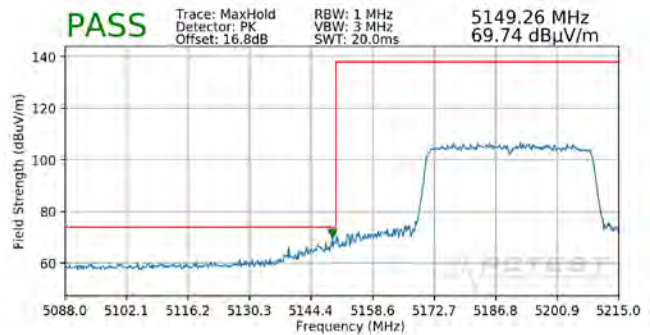


**Plot 7-338. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1)**

Worst Case Mode:	802.11ac
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5310MHz
Channel:	62

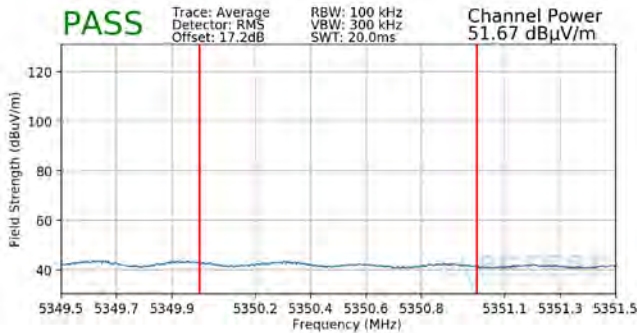


**Plot 7-339. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A)**

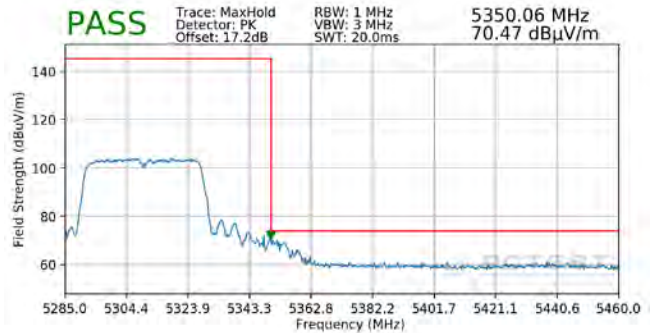


**Plot 7-340. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A)**

FCC ID: A3LSMN975U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 222 of 244

Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5510MHz  
 Channel: 102

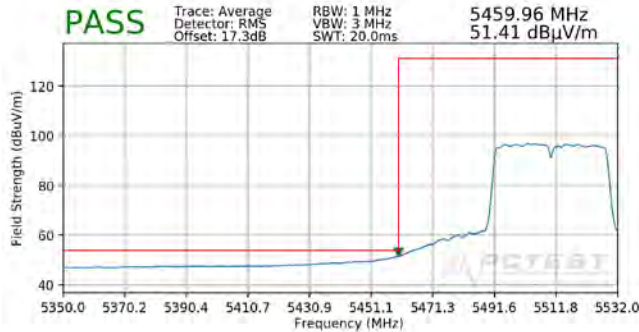


**Plot 7-341. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C)**

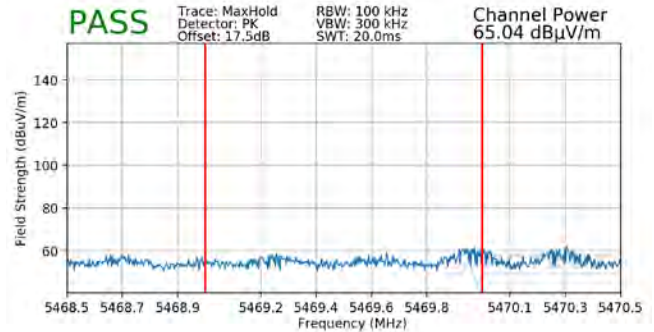

**Plot 7-342. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C)**


Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5795MHz  
 Channel: 159

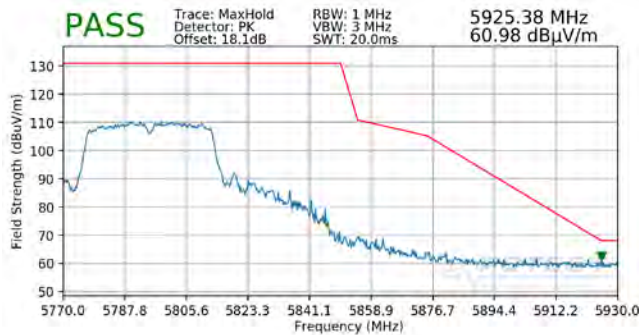


**Plot 7-343. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 3)**

FCC ID: A3LSMN975U			<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1905200079-08.A3L	<b>Test Dates:</b> 05/20 - 07/09/2019	<b>EUT Type:</b> Portable Handset	Page 223 of 244	

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5190MHz  
 Channel: 38

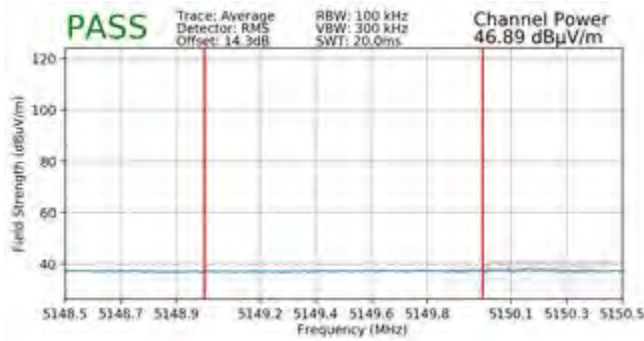

**Plot 7-344. Radiated Band Edge Plot MIMO (Average – WCP)**

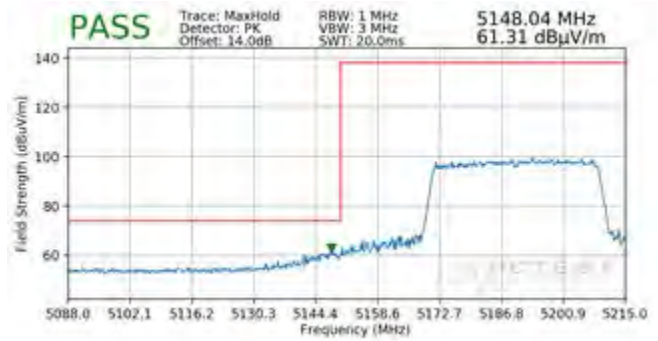


**Plot 7-345. Radiated Band Edge Plot MIMO (Peak – WCP)**


FCC ID: A3LSMN975U	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 224 of 244

### 7.6.13 MIMO Radiated Band Edge Measurements (80MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11ax  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5210MHz  
 Channel: 42

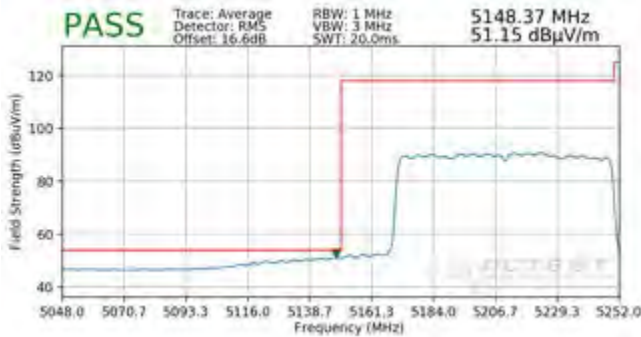


**Plot 7-346. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1)**

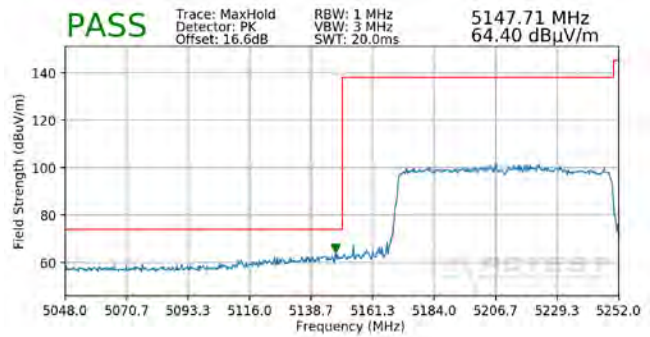


**Plot 7-347. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1)**

Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5290MHz  
 Channel: 58

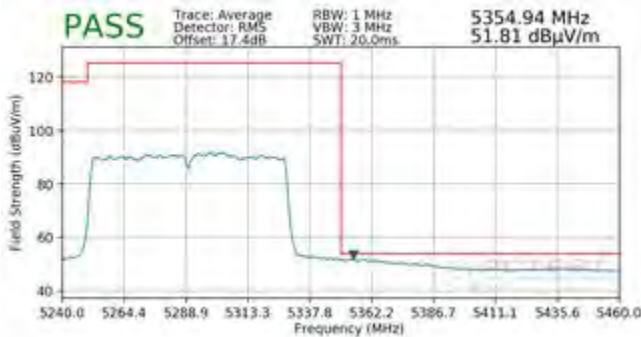


**Plot 7-348. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A)**

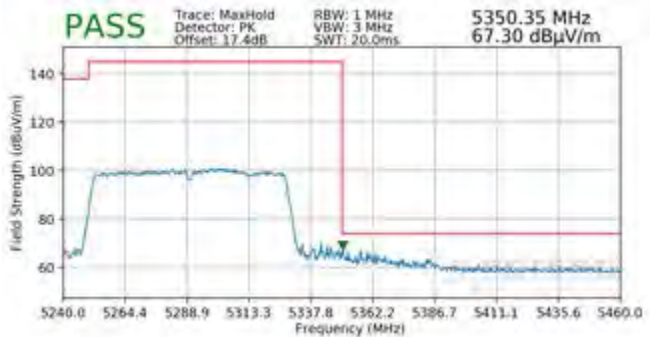


**Plot 7-349. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A)**

FCC ID: A3LSMN975U			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 225 of 244	

Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5530MHz  
 Channel: 106

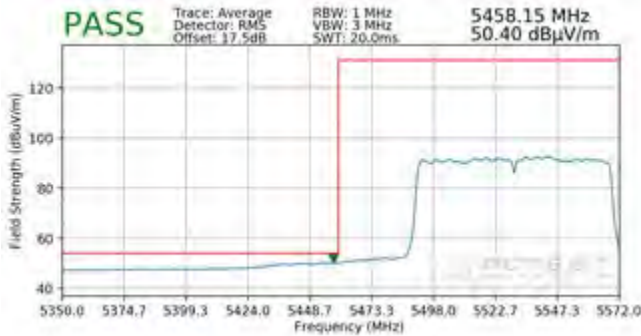


**Plot 7-350. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C)**

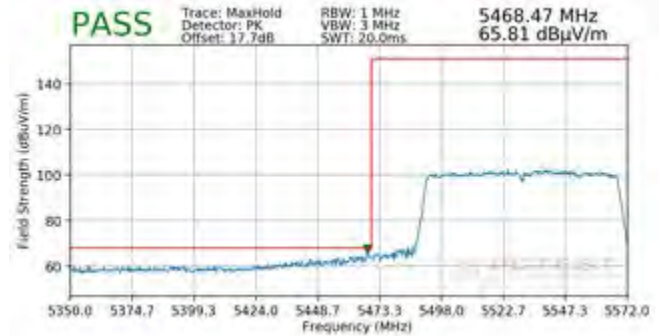

**Plot 7-351. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C)**

Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5775MHz  
 Channel: 155

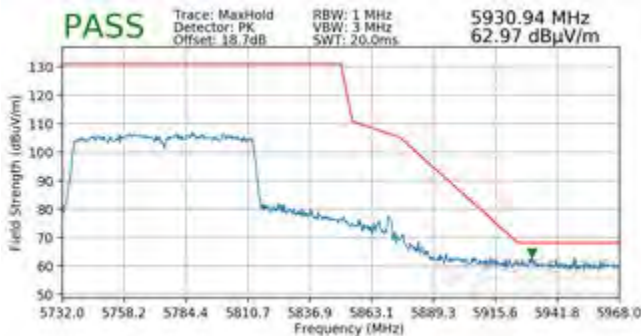


**Plot 7-352. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 3)**

FCC ID: A3LSMN975U			<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1905200079-08-A3L	<b>Test Dates:</b> 05/20 - 07/09/2019	<b>EUT Type:</b> Portable Handset		Page 226 of 244

Worst Case Mode: 802.11ac  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5290MHz  
 Channel: 58



**Plot 7-353. Radiated Band Edge Plot MIMO (Average – WCP)**

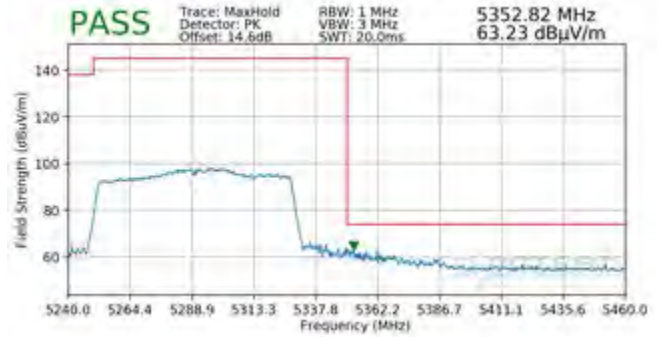

**Plot 7-354. Radiated Band Edge Plot MIMO (Peak – WCP)**

FCC ID: A3LSMN975U	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 227 of 244

## 7.7 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209; RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

**All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-82 per Section 15.209 and RSS-Gen (8.9).**

Frequency	Field Strength [ $\mu\text{V/m}$ ]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table 7-82. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2013

### Test Settings


#### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


FCC ID: A3LSMN975U	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 228 of 244

### Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

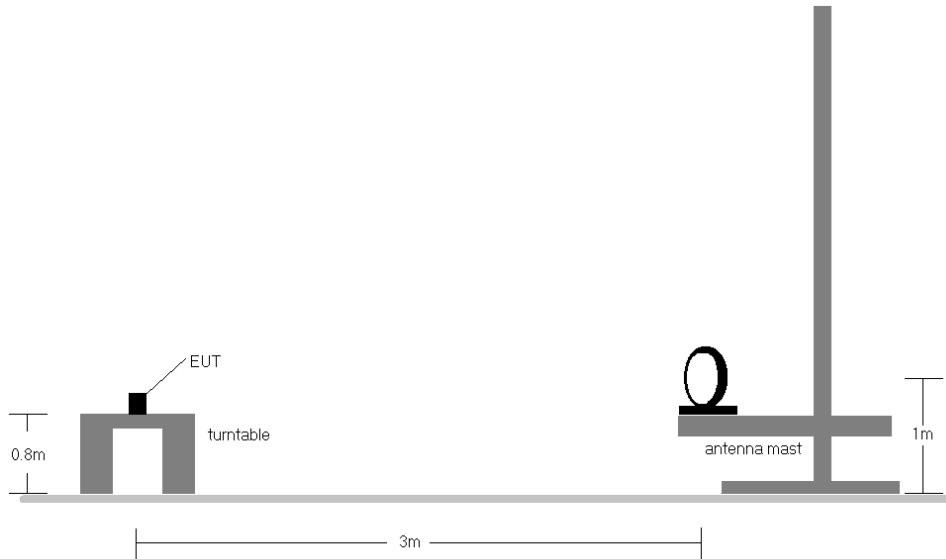

**Figure 7-6. Radiated Test Setup < 30MHz**

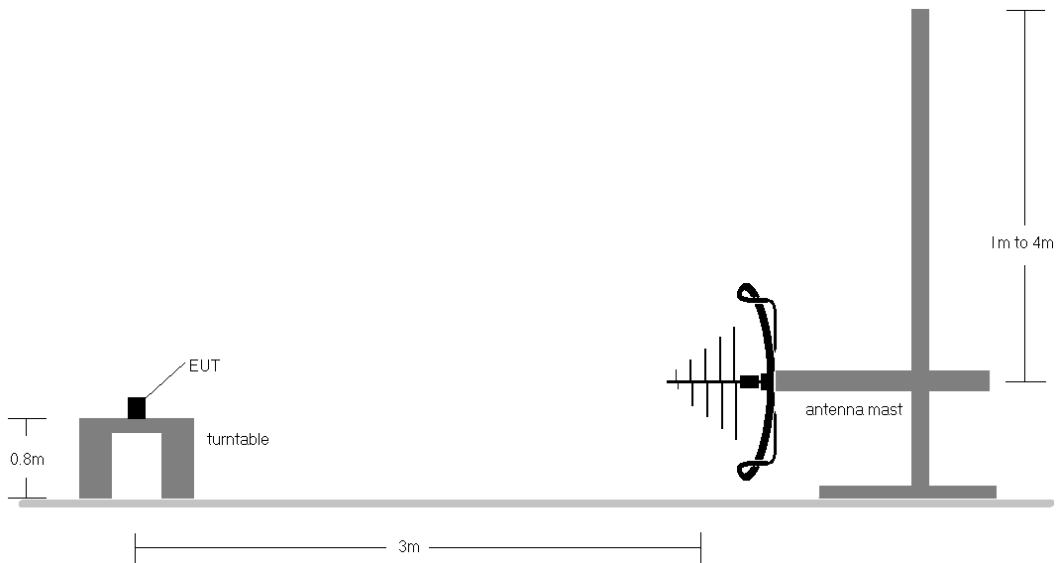

**Figure 7-7. Radiated Test Setup < 1GHz**


FCC ID: A3LSMN975U	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 229 of 244

**Test Notes**

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-82.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

FCC ID: A3LSMN975U	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 230 of 244


**SISO Antenna-1 Radiated Spurious Emissions Measurements (Below 1GHz)**  
**§15.209; RSS-Gen [8.9]**

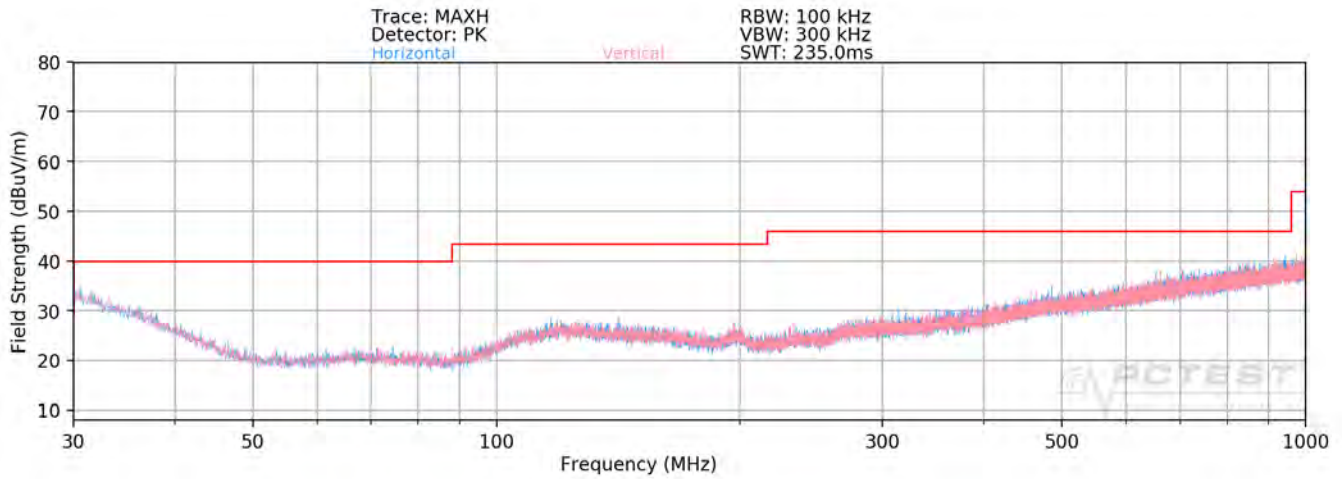

**Plot 7-355. Radiated Spurious Plot below 1GHz SISO ANT1 (802.11a – U3 Ch. 157)**

FCC ID: A3LSMN975U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset		Page 231 of 244


**SISO Antenna-2 Radiated Spurious Emissions Measurements (Below 1GHz)**  
**§15.209; RSS-Gen [8.9]**

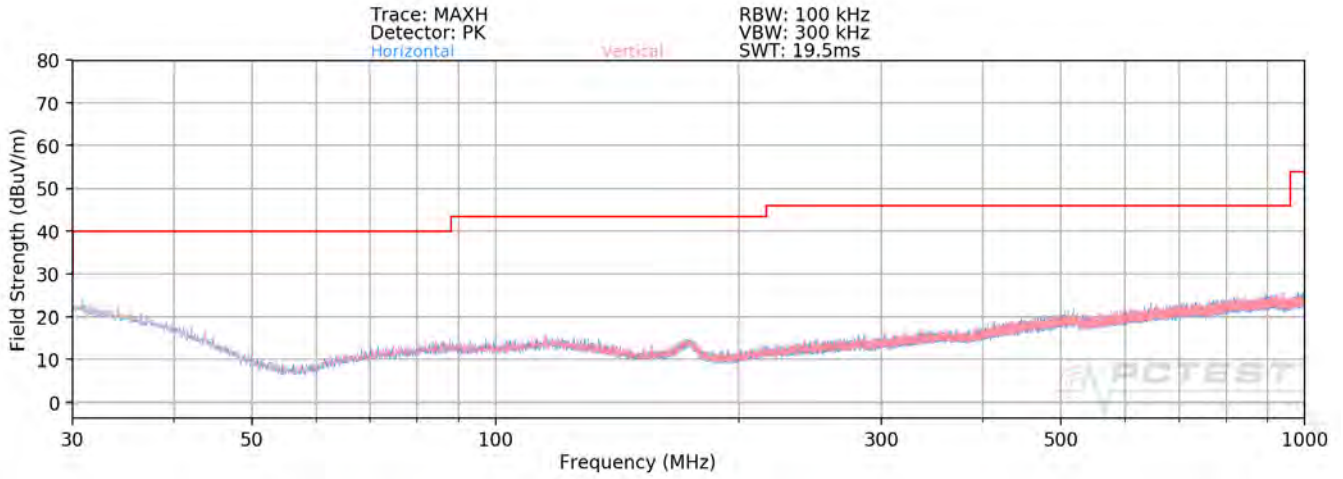


**Plot 7-356. Radiated Spurious Plot below 1GHz SISO ANT2 (802.11a – U3 Ch. 157)**

FCC ID: A3LSMN975U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset		Page 232 of 244


**Simultaneous Tx Radiated Spurious Emissions Measurements (Below 1GHz)**  
**§15.209; RSS-Gen [8.9]**

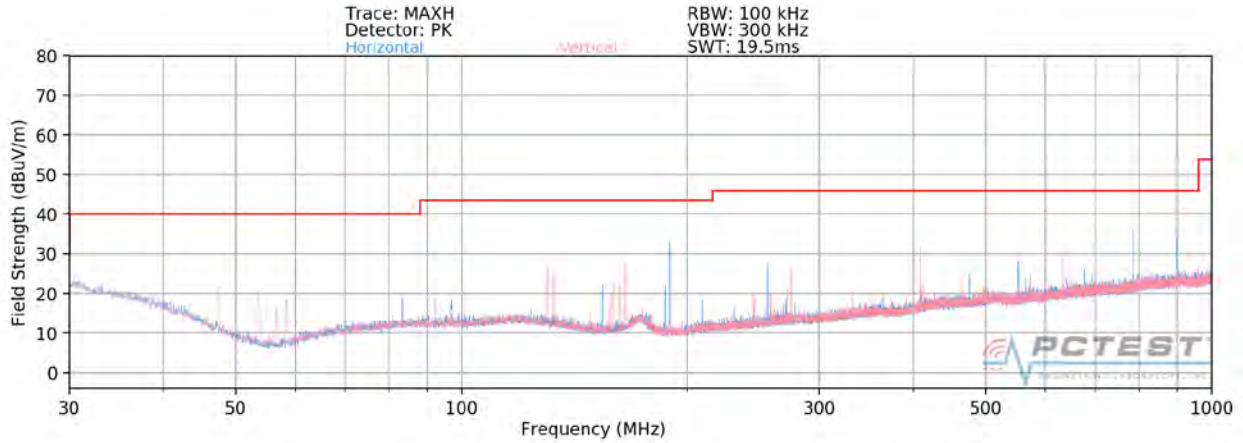

**Plot 7-357. Radiated Spurious Plot below 1GHz (2.4GHz – 5GHz)**

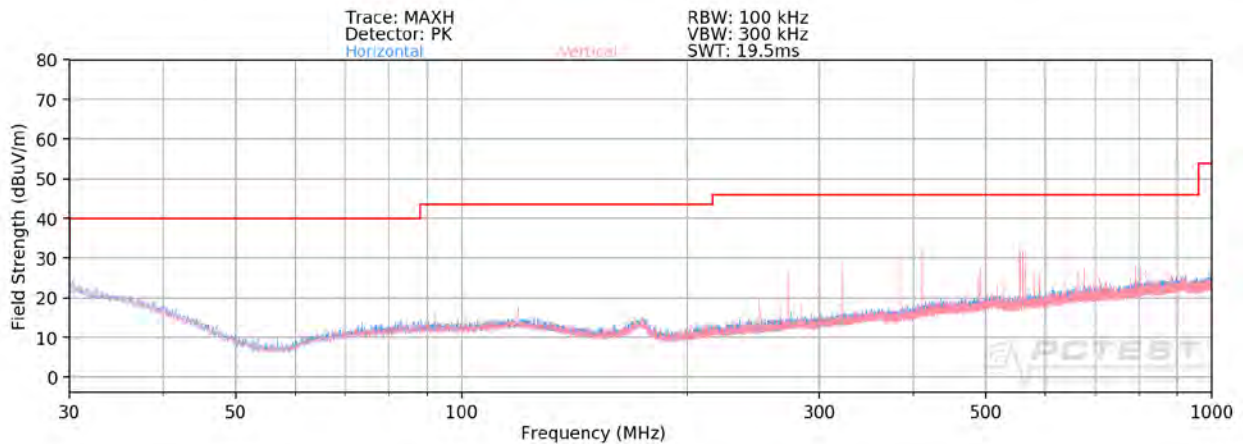

**Plot 7-358. Radiated Spurious Plot below 1GHz (5GHz – 2.4 GHz)**

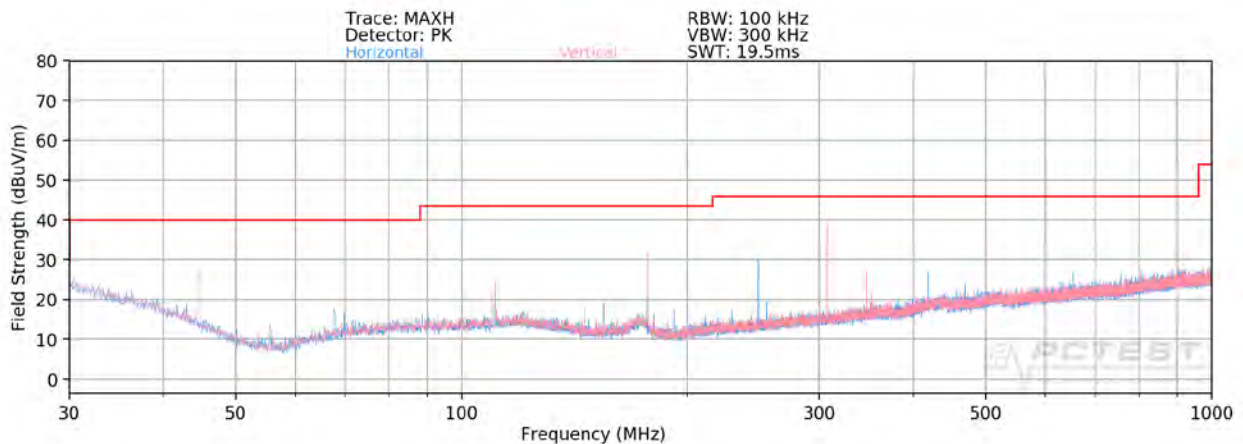

**Plot 7-359. Radiated Spurious Plot below 1GHz (Dual Band Simult. Tx)**

FCC ID: A3LSMN975U	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 233 of 244

## 7.8 Line-Conducted Test Data

§15.407; RSS-Gen [8.8]

### Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

**All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).**

Frequency of emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

**Table 7-83. Conducted Limits**

\*Decreases with the logarithm of the frequency.

### Test Procedures Used

ANSI C63.10-2013, Section 6.2

### Test Settings

#### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


#### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMN975U	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 234 of 244

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

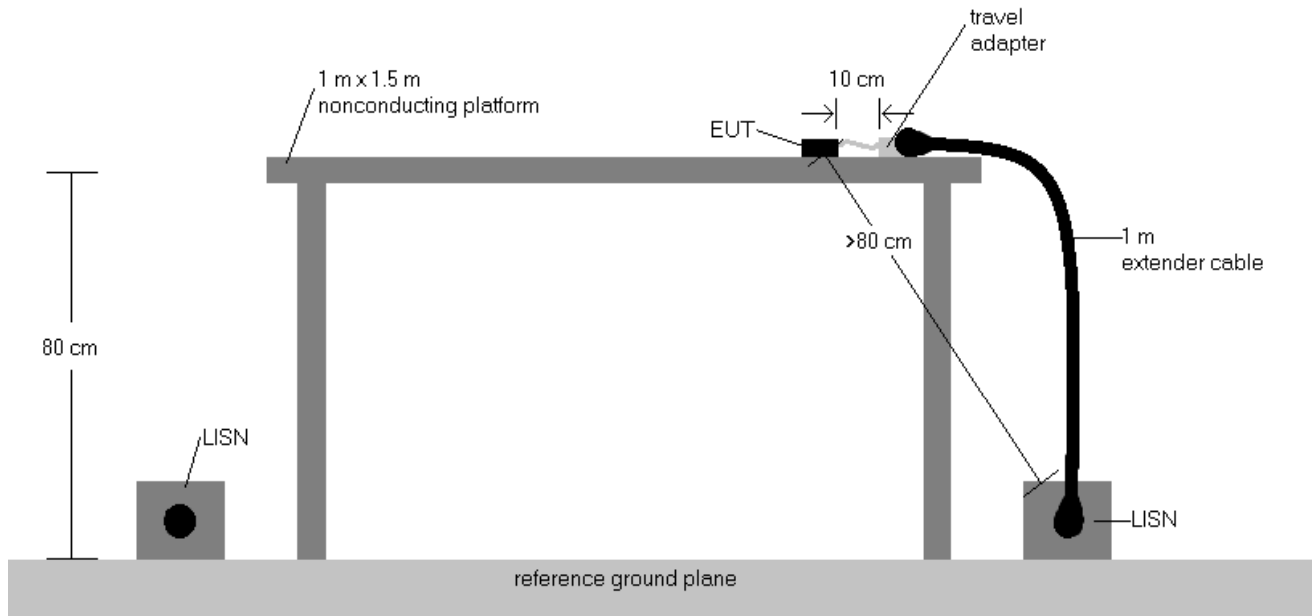


**Figure 7-8. Test Instrument & Measurement Setup**


### Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
3.  $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4.  $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5.  $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LSMN975U	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 235 of 244

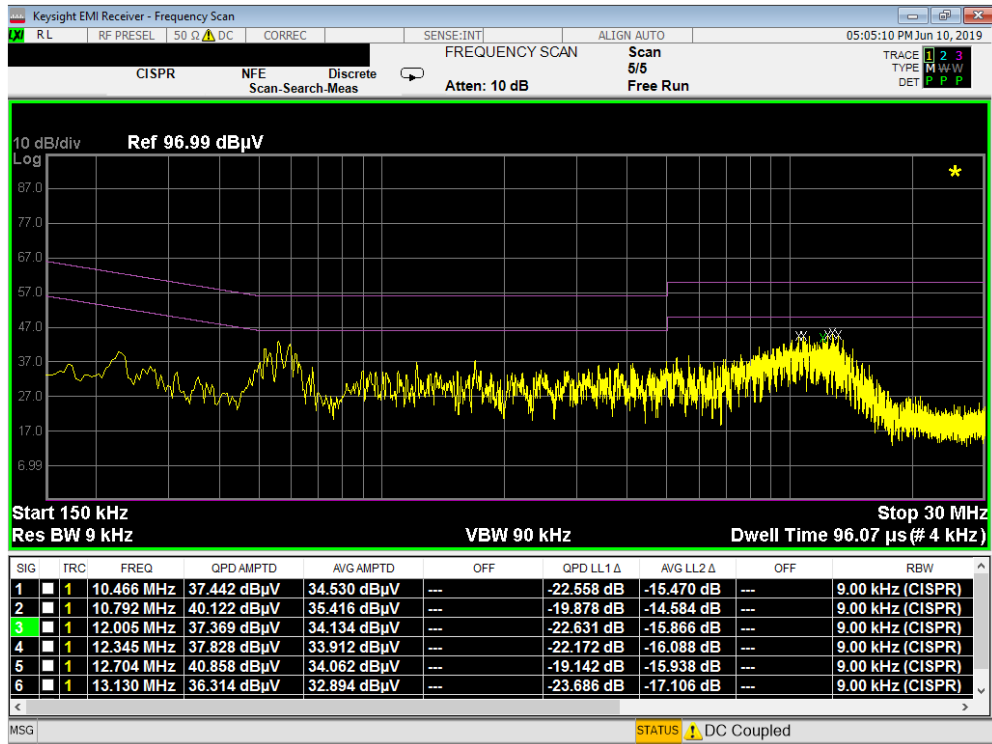


Plot 7-360. Line Conducted Plot with 802.11a UNII Band 1 (L1) with Travel Adapter

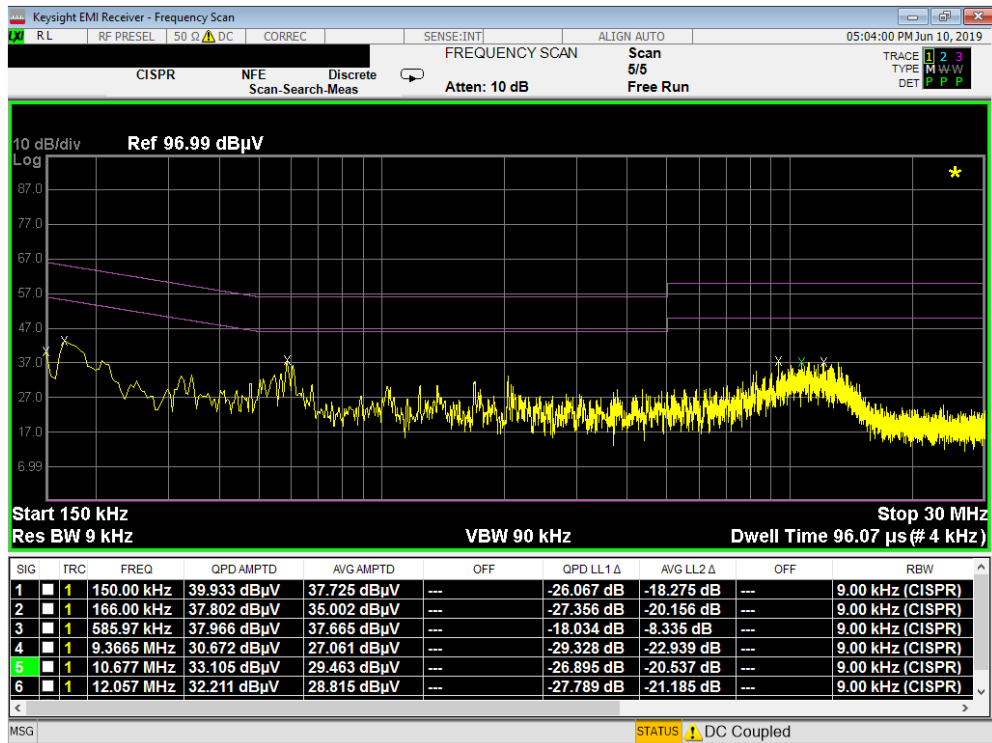


Plot 7-361. Line Conducted Plot with 802.11a UNII Band 1 (N) with Travel Adapter

FCC ID: A3LSMN975U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.		<b>MEASUREMENT REPORT</b> (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset	Page 236 of 244	

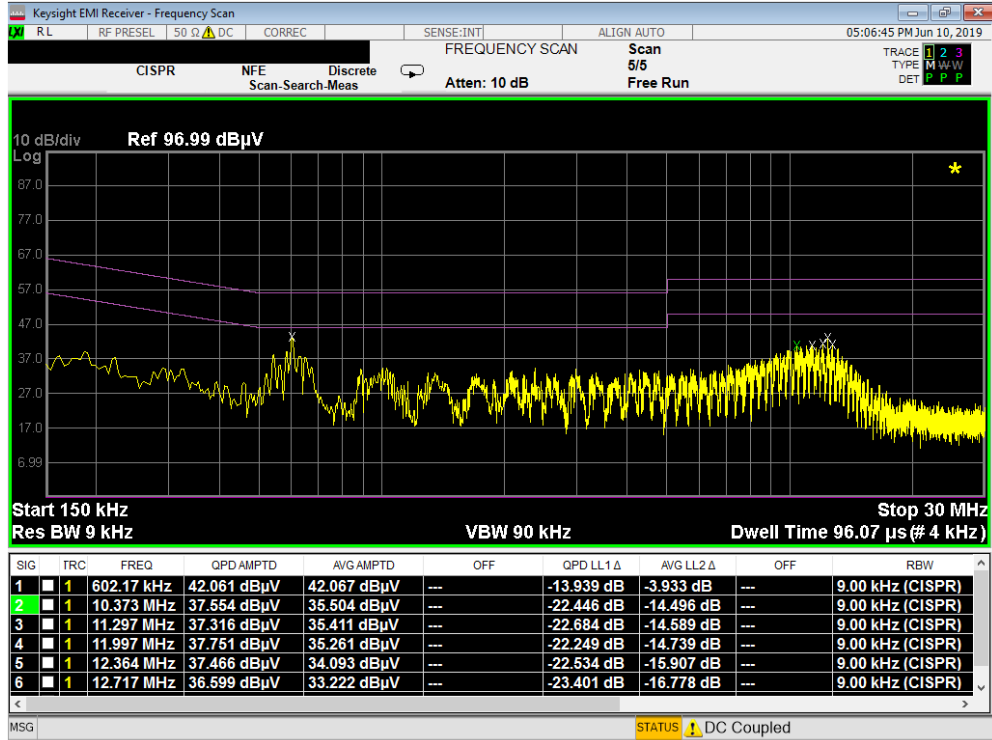


Plot 7-362. Line Conducted Plot with 802.11a UNII Band 2A (L1) with Travel Adapter

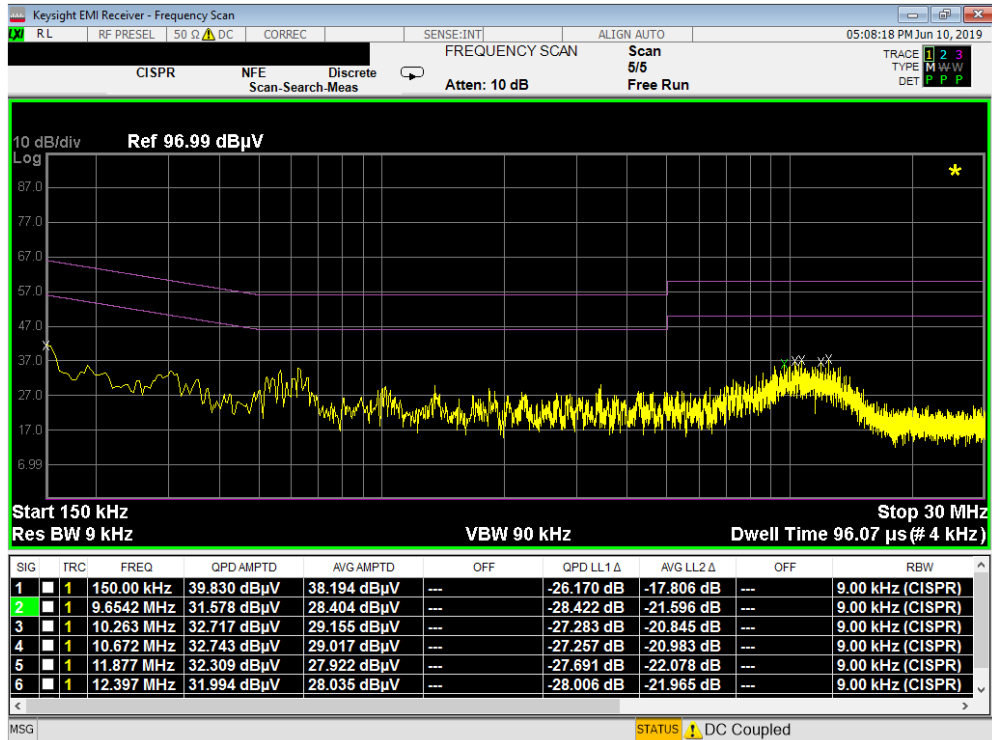


Plot 7-363. Line Conducted Plot with 802.11a UNII Band 2A (N) with Travel Adapter

FCC ID: A3LSMN975U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.		<b>MEASUREMENT REPORT</b> (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset		Page 237 of 244

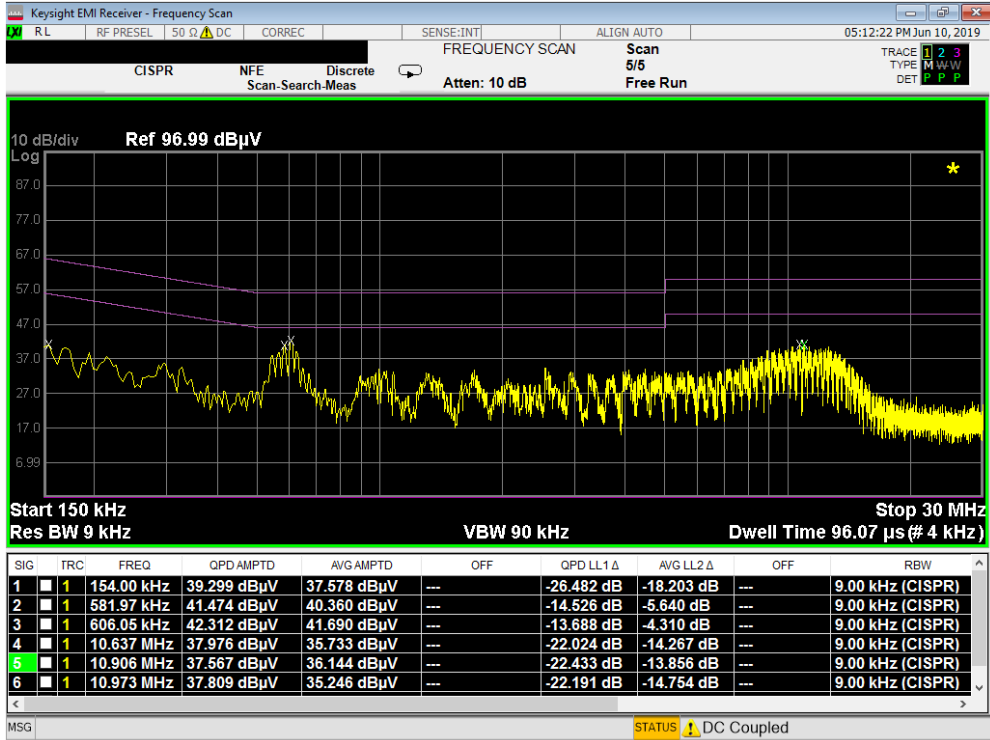


Plot 7-364. Line Conducted Plot with 802.11a UNII Band 2C (L1) with Travel Adapter

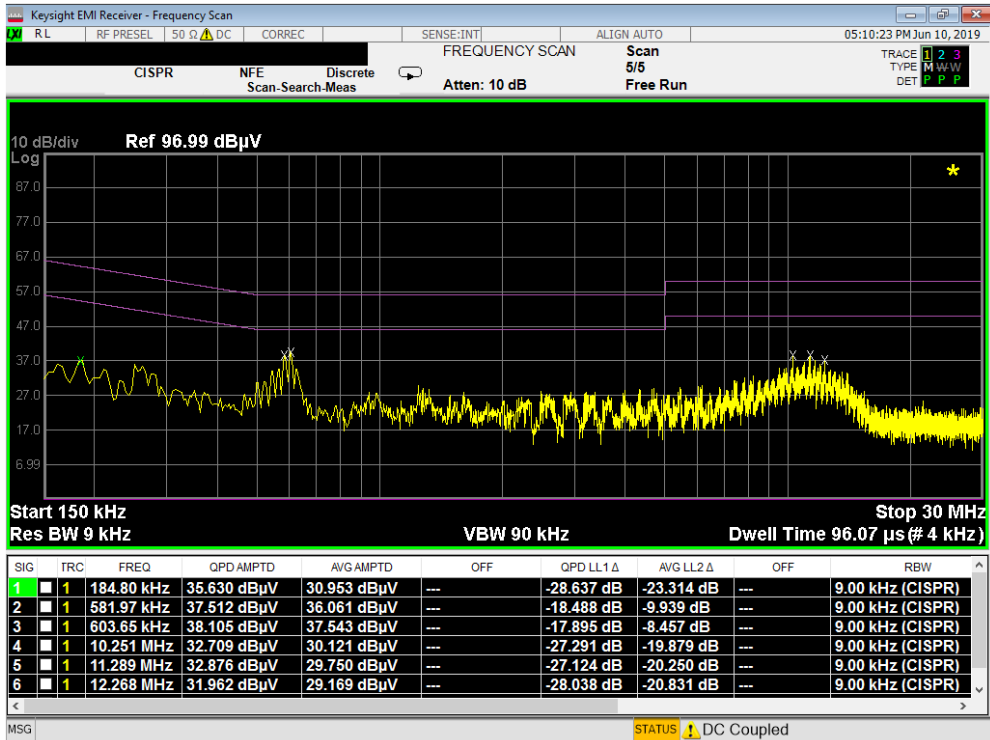


Plot 7-365. Line Conducted Plot with 802.11a UNII Band 2C (N) with Travel Adapter

FCC ID: A3LSMN975U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.		<b>MEASUREMENT REPORT</b> (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset		Page 238 of 244

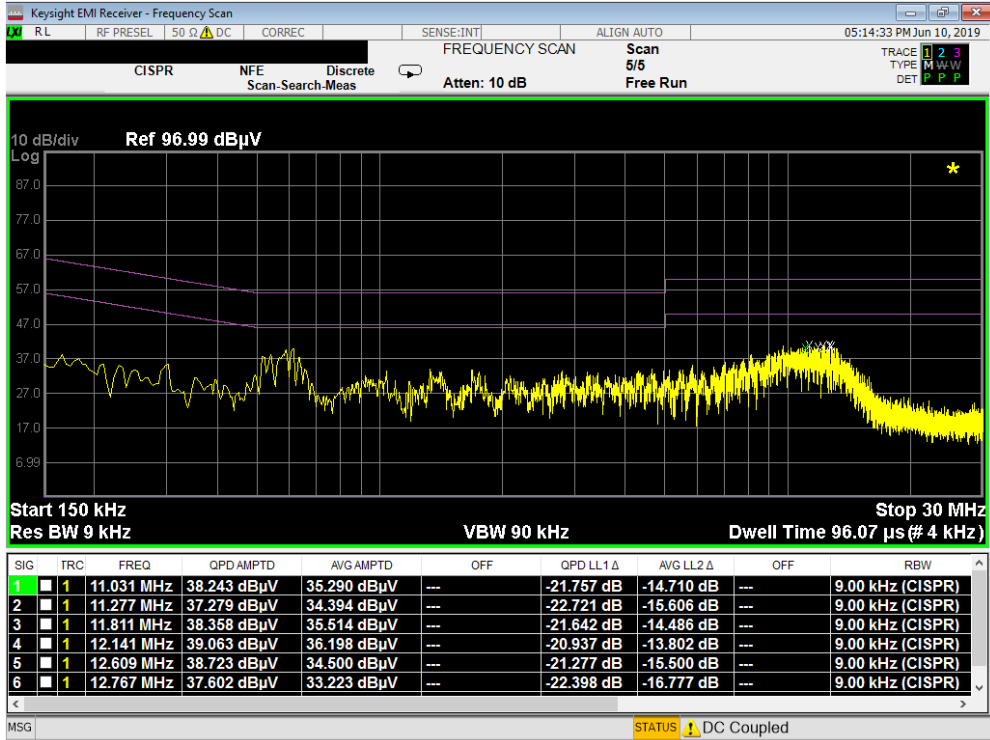


Plot 7-366. Line Conducted Plot with 802.11a UNII Band 3 (L1) with Travel Adapter

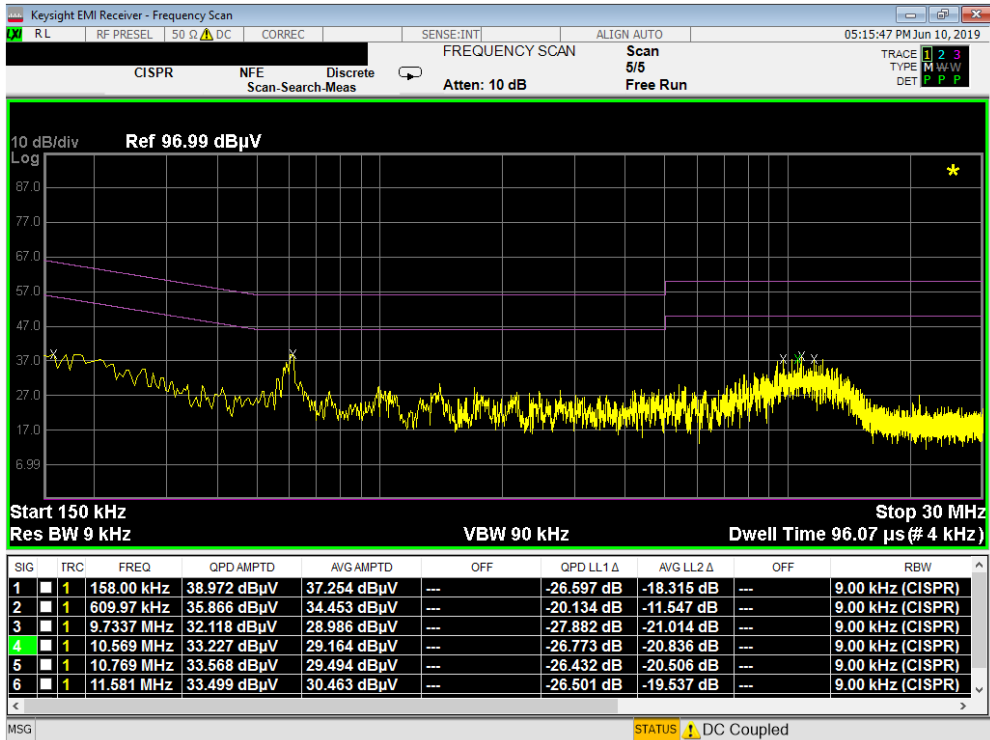


Plot 7-367. Line Conducted Plot with 802.11a UNII Band 3 (N) with Travel Adapter

FCC ID: A3LSMN975U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.		<b>MEASUREMENT REPORT</b> (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset		Page 239 of 244

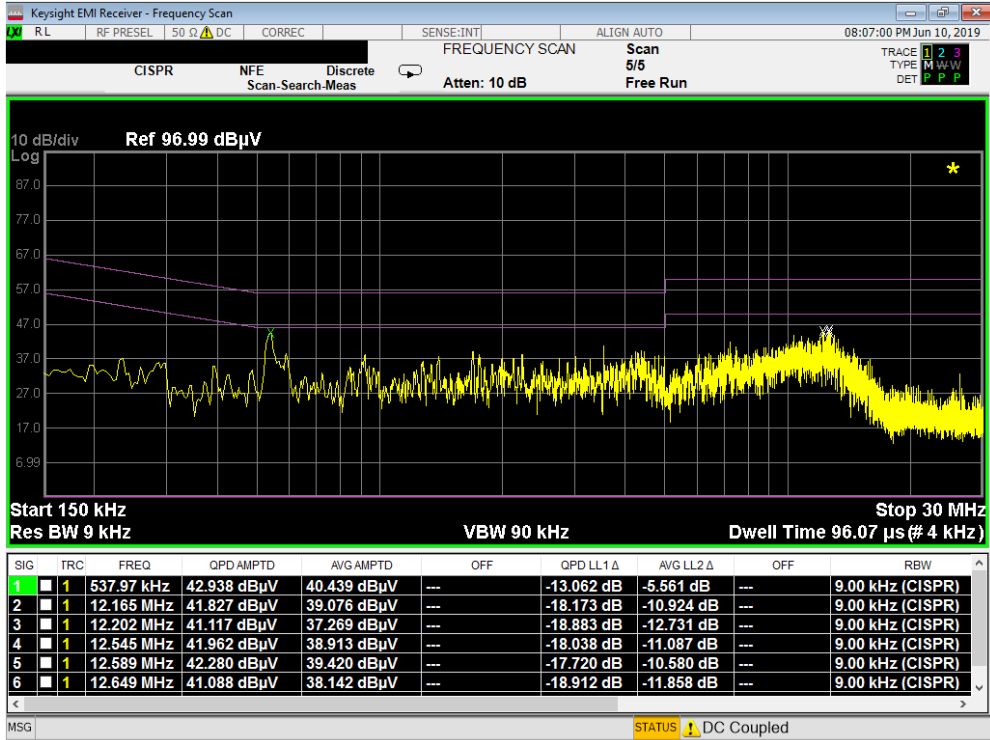


Plot 7-368. Line Conducted Plot with 802.11a UNII Band 1 (L1) with Wireless Charging Pad

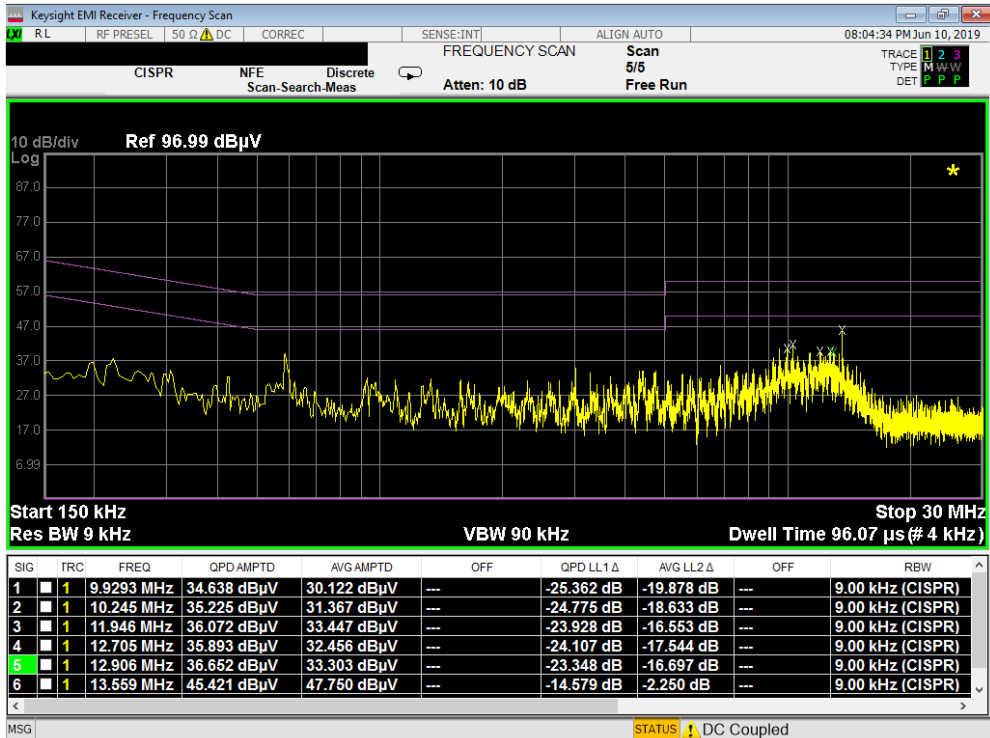


Plot 7-369. Line Conducted Plot with 802.11a UNII Band 1 (N) with Wireless Charging Pad

FCC ID: A3LSMN975U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.		<b>MEASUREMENT REPORT</b> (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset		Page 240 of 244

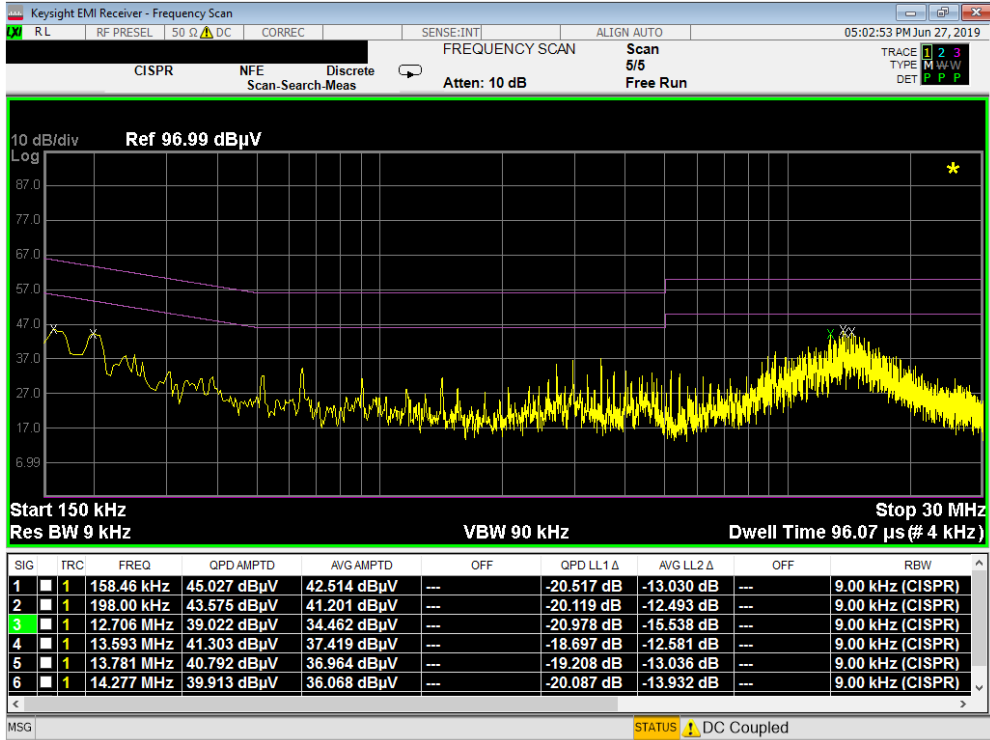


Plot 7-370. Line Conducted Plot with 802.11a UNII Band 2A (L1) with Wireless Charging Pad

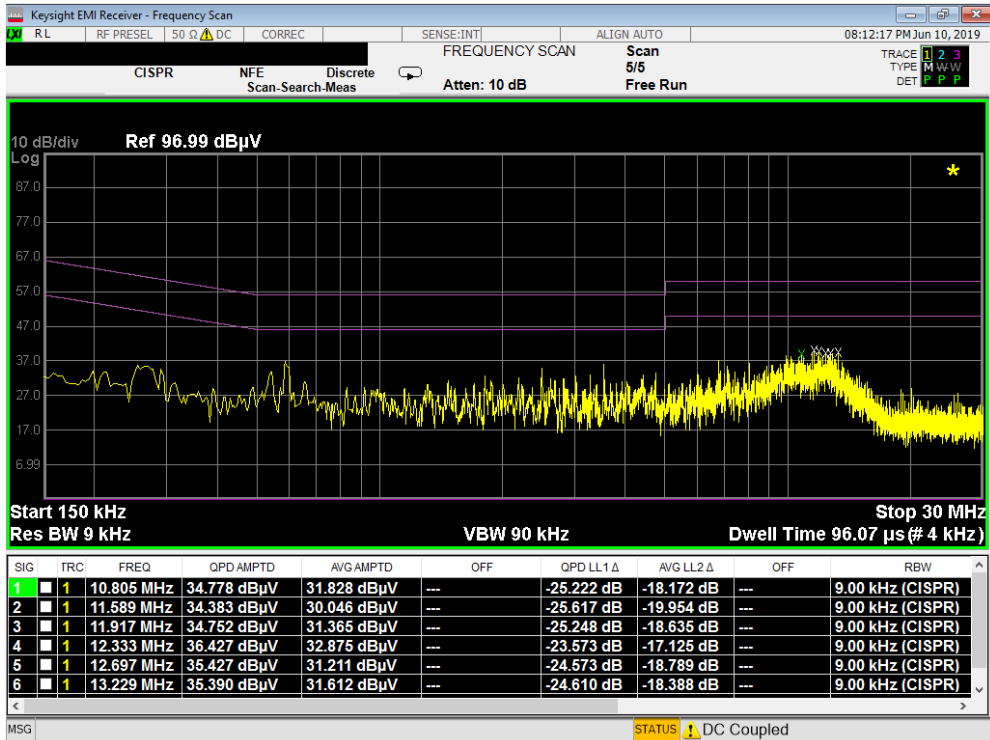


Plot 7-371. Line Conducted Plot with 802.11a UNII Band 2A (N) with Wireless Charging Pad

FCC ID: A3LSMN975U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset		Page 241 of 244

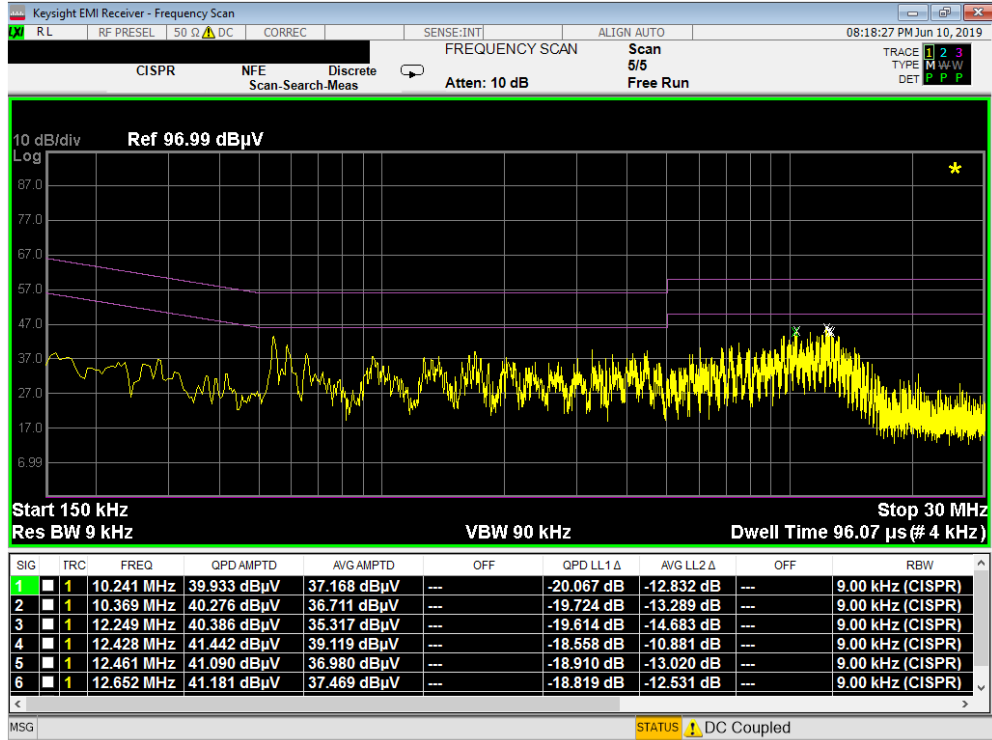


Plot 7-372. Line Conducted Plot with 802.11a UNII Band 2C (L1) with Wireless Charging Pad

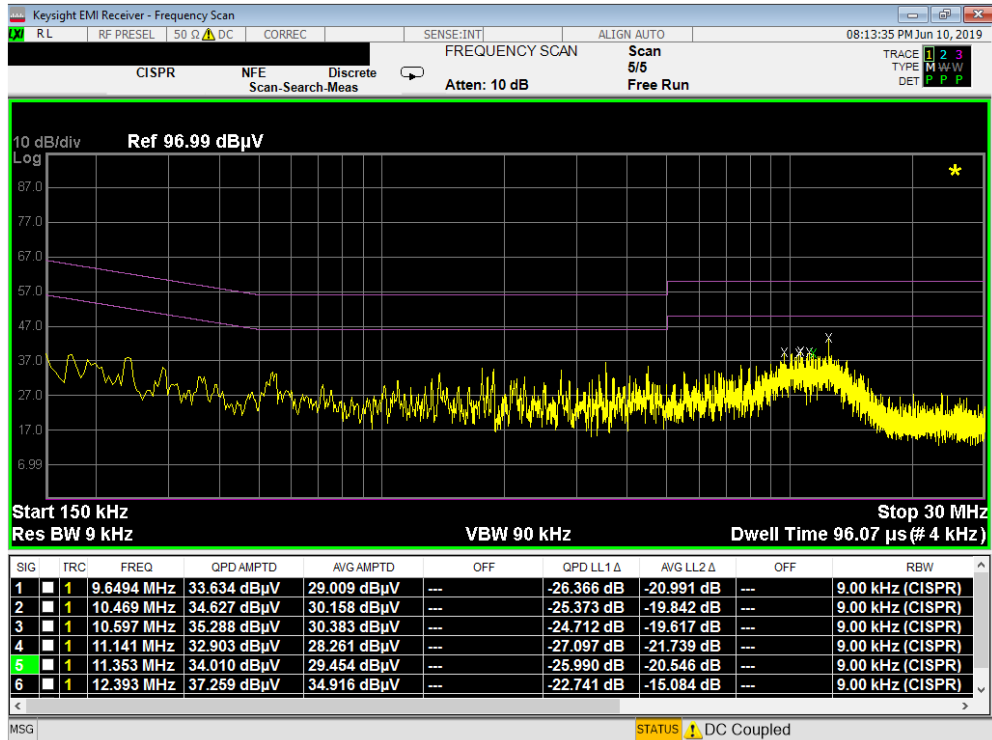


Plot 7-373. Line Conducted Plot with 802.11a UNII Band 2C (N) with Wireless Charging Pad

FCC ID: A3LSMN975U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset		Page 242 of 244

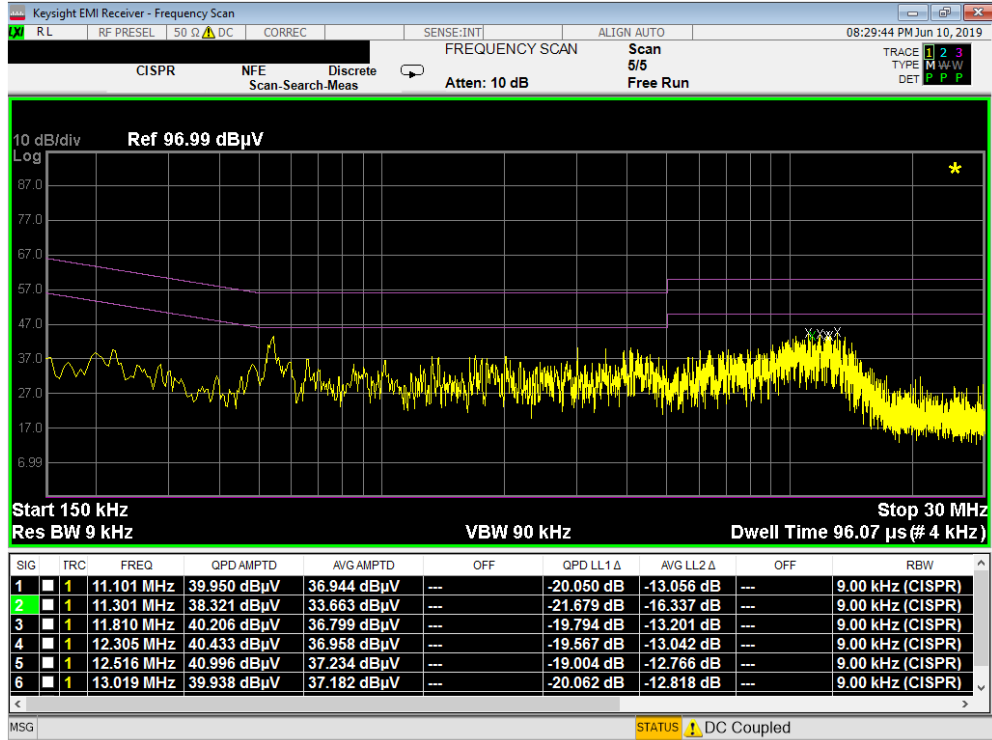

Plot 7-374. Line Conducted Plot with 802.11a UNII Band 3 (L1) with Wireless Charging Pad

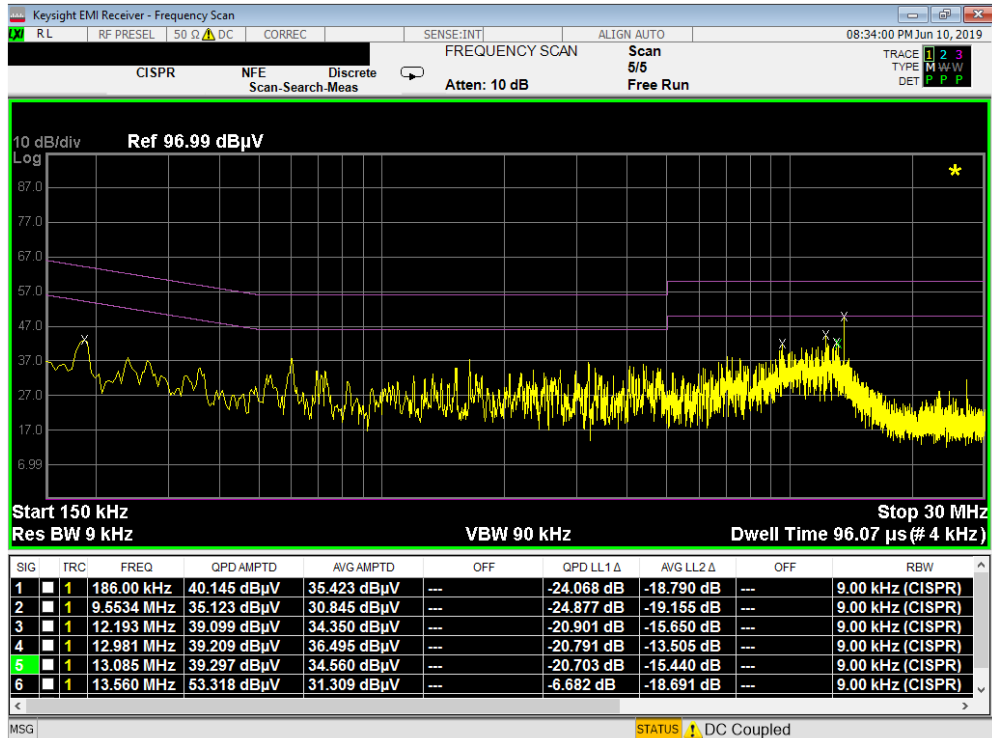

Plot 7-375. Line Conducted Plot with 802.11a UNII Band 3 (N) with Wireless Charging Pad

FCC ID: A3LSMN975U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.		<b>MEASUREMENT REPORT</b> (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M1905200079-08.A3L	Test Dates: 05/20 - 07/09/2019	EUT Type: Portable Handset		Page 243 of 244

## 8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMN975U** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules.

<b>FCC ID:</b> A3LSMN975U	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1905200079-08.A3L	<b>Test Dates:</b> 05/20 - 07/09/2019	<b>EUT Type:</b> Portable Handset	Page 244 of 244