



FCC Part 1 Subpart I
FCC Part 2 Subpart J

MPE EVALUATION REPORT

FOR

WPT (Wireless Power Transfer)

MODEL NUMBER: SM-N976B

FCC ID: A3LSMN976B

REPORT NUMBER: 4789009800-S4V1

ISSUE DATE: 6/19/2019

Prepared for
SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Prepared by
UL Korea, Ltd.
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433



TL-637

Revision History

Rev.	Date	Revisions	Revised By
V1	6/19/2019	Initial Issue	Sunghoon. Kim

Table of Contents

1.	Attestation of Test Results	4
2.	TEST METHODOLOGY	5
3.	Facilities and Accreditation	5
4.	EQUIPMENT UNDER TEST	5
4.1.	DESCRIPTION OF EUT	5
4.2.	WORST-CASE CONFIGURATION.....	5
4.3.	KDB 680106 D01 v03 SECTION 5.b) EQUIPMENT APPROVAL CONSIDERATIONS.....	6
4.4.	DESCRIPTION OF TEST SETUP.....	6
5.	TEST AND MEASUREMENT EQUIPMENT.....	8
6.	Maximum PERMISSIBLE RF EXPOSURE	9
6.1.	FCC LIMITS AND SUMMARY	9
6.1.1.	FCC LIMITS.....	9
6.2.	TEST RESULTS.....	10
6.2.1.	FCC RF EXPOSURE.....	10
6.2.2.	FCC SUMMARY OF RESULTS.....	12
7.	SETUP PHOTOS	13

1. Attestation of Test Results

Applicant Name	SAMSUNG ELECTRONICS CO.,LTD.
FCC ID	A3LSMN976B
Model Number	SM-N976B
SERIAL Number	R3CM506MKPR
Applicable Standards	FCC PART 1 SUBPART I FCC PART 2 SUBPART J KDB 680106 D01
Date Tested	6/17/2019 to 6/19/2019
Test Results	Complies
UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.	
Approved & Released By:	Prepared By:
	
Justin Park Lead Test Engineer UL Korea, Ltd. Suwon Laboratory	Sunghoon Kim Test Engineer UL Korea, Ltd. Suwon Laboratory

2. TEST METHODOLOGY

All calculations were made in accordance with FCC OET Bulletin 65 Edition 97-01.

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at

Suwon
Shield Room

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637.

The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. EQUIPMENT UNDER TEST

4.1. DESCRIPTION OF EUT

The EUT has WPT (Wireless Power Transfer) feature which has inductive charging coil to charge phone or watch. The charging frequency is between 110 kHz to 148 kHz, and the maximum power consumption is 9.0 W in charging status.

4.2. WORST-CASE CONFIGURATION

Test configuration	Description
DUT to Phone test configuration 1	Charging from Phone to DUT
DUT to Phone test configuration 2	Charging from Phone to DUT (TA Charging from DUT)
DUT to Phone test configuration 3	Charging from Phone to DUT
DUT to Phone test configuration 4	Charging from Phone to DUT (TA Charging from DUT)
DUT to Watch test configuration 5	Charging from Watch to DUT
DUT to Watch test configuration 6	Charging from Watch to DUT (TA Charging from DUT)

Note:

Configuration 2, 4 and 6 were tested with the worst case of configuration 1, 3 and 5.

4.3. KDB 680106 D01 v03 SECTION 5.b) EQUIPMENT APPROVAL CONSIDERATIONS

Requirement	Device
(1) Power transfer frequency is less than 1 MHz.	Yes. Operating Frequency is between 110kHz to 148 kHz.
(2) Output power from each primary coil is less than or equal to 15 watts.	Yes. Maximum power is 9.0 Watts.
(3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.	Yes.
(4) Client device is placed directly in contact with the transmitter.	Yes.
(5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	Yes.
(6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.	Yes. The aggregate field at 15 cm from the device are 15.09 % of the FCC H field limit.

4.4. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT & PERIPHERALS

SUPPROT EQUIPMENT & PERIPHERALS LIST				
Description	Manufacturer	Model	Serial Numver	FCC ID
Phone	Samsung Electronics Co., Ltd.	SM-N976B	ce6240c773197e35	A3LSMN976B
Watch	Samsung Electronics Co., Ltd.	SM-R815F	R3AK4009TLX	A3LSMR815F
Traver Adapter	Samsung Electronics Co., Ltd.	EP-TA800	R37M55W0ZE1SE3	DoC
USB Data Cable	Samsung Electronics Co., Ltd.	EP-DG977	-	-

TEST SETUP


The following three modes are tested in test configurations;

Mode
Operating (SUPPORT Equipment, <10% Power Charging)
Operating (SUPPORT Equipment, 50~55% Power Charging)
Operating (SUPPORT Equipment, 90~95% Power Charging)


MEASUREMENT TEST SETUP


The measurement was taken using a probe placed 15 cm surrounding the device and 20 cm above the top surface of the EUT. Measurements were taken the top (charger below/client) and all sides of the EUT per KDB680106 D01 v03 and RF Exposure Procedures (Wireless Power Transfer) in TCB Workshop October, 2018.

DUT to phone test Configuration 1 & 2

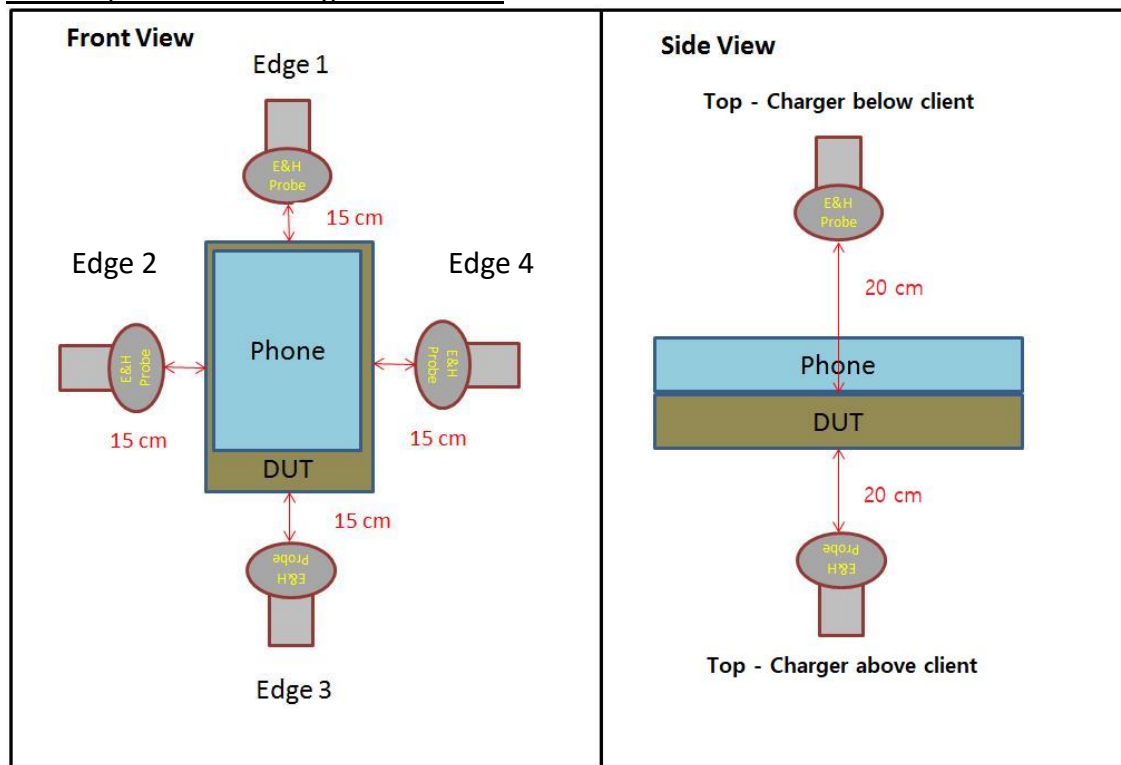

DUT to phone test Configuration 3 & 4

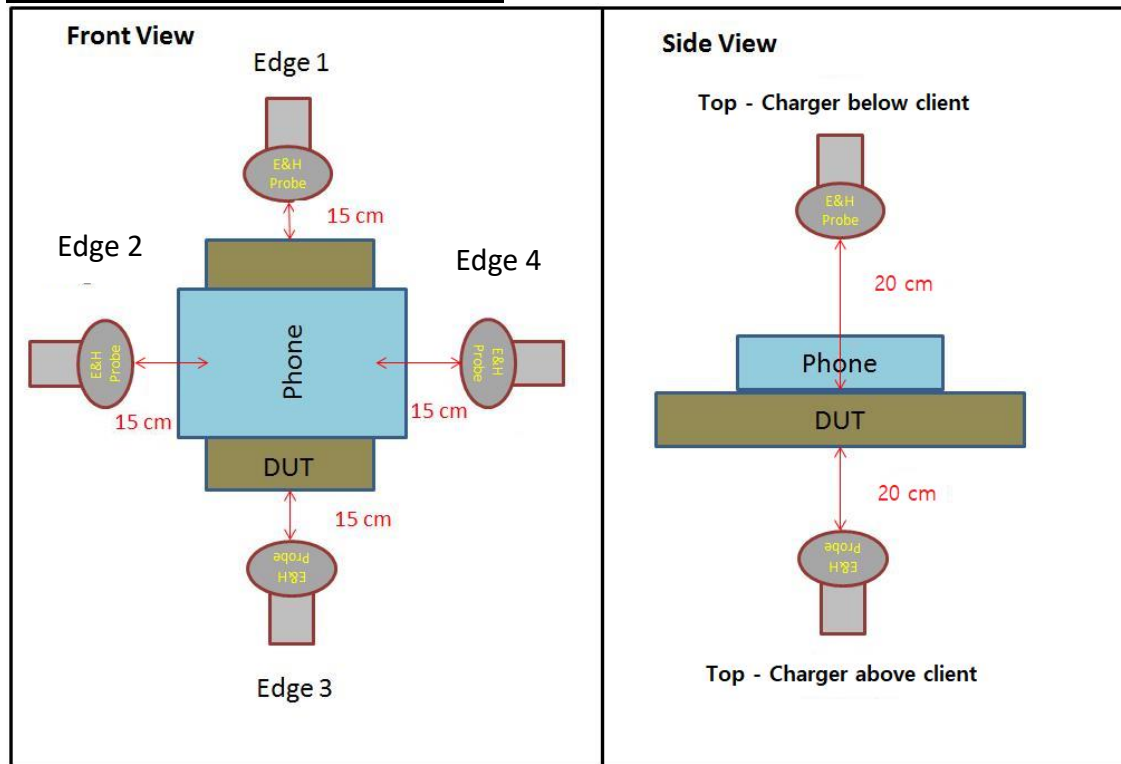

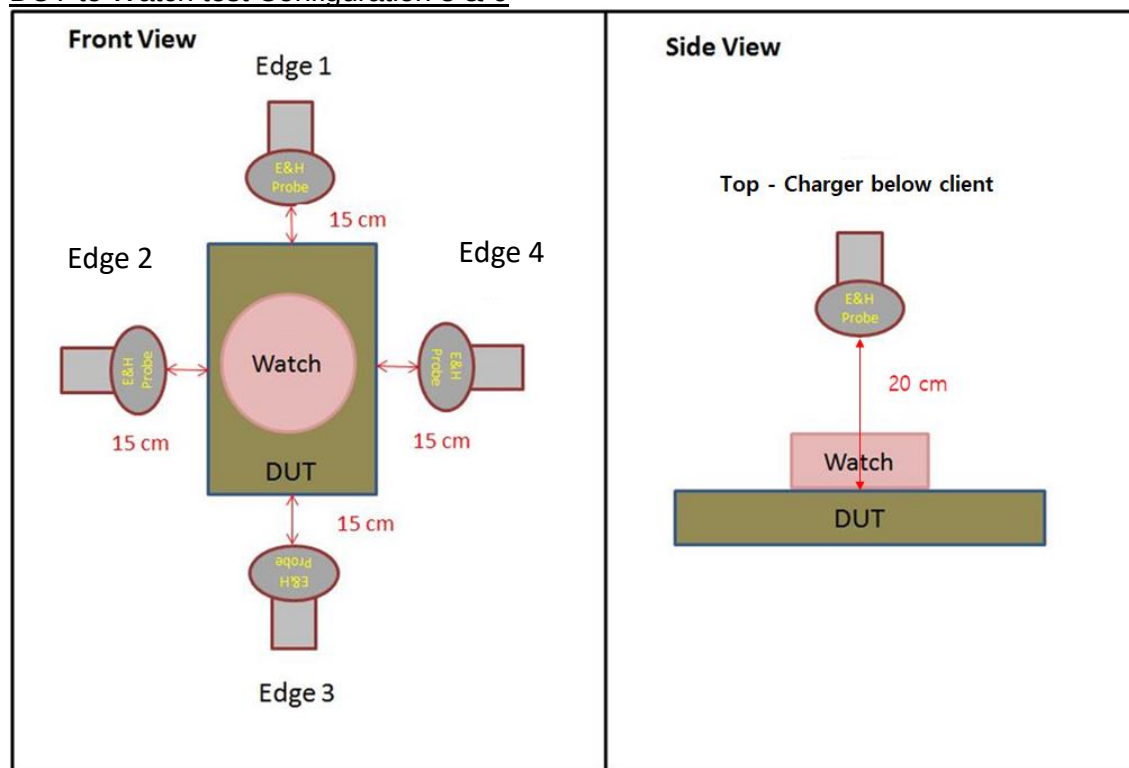DUT to Watch test Configuration 5 & 6

5. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was used for the tests documented in this report;

Test Equipment List					
Description	Manufacturer	Model	Serial Numver	Cal Date	Cal Due
Electric and Magnetic Field Probe	Narda	EHP-200A	170WX80301	12-14-2018	12-14-2019

6. Maximum PERMISSIBLE RF EXPOSURE

6.1. FCC LIMITS AND SUMMARY

6.1.1. FCC LIMITS

§ 1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in § 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of § 2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

6.2. TEST RESULTS

6.2.1. FCC RF EXPOSURE

H-FIELD MEASUREMENTS

Note: Peak measurement were performed. RMS values were calculated from the peak measurement. Please refer to the formula for calculating the RMS values: [Field Strength x $\sqrt{\text{Duty Cycle}}$].

Additional test was performed in each Test mode by moving the probe surrounding the device to find the maximum exposure.

TEST results of DUT to phone test Configuration 1 & 2

FCC RF Exposure Result					
Test Configuration	Test mode	Test distance	Test Position	H-Field Limit (A/m)	H-Field meas data (A/m)
Configuration 1	Operating Real Product (Power <10% charging)	15 cm probe to edges of EUT and 20 cm probe to top surface of the EUT	Top - charger above client	1.63	0.051
			Top - charger below client		0.052
			Edge 1		0.053
			Edge 2		0.053
			Edge 3		0.051
			Edge 4		0.052
			max		0.059
	Operating Real Product (Power 50~55% charging)		Top - charger above client		0.053
			Top - charger below client		0.053
			Edge 1		0.052
			Edge 2		0.060
			Edge 3		0.054
			Edge 4		0.053
			max		0.064
	Operating Real Product (Power 90~95% charging)		Top - charger above client		0.053
			Top - charger below client		0.051
			Edge 1		0.053
			Edge 2		0.060
			Edge 3		0.053
			Edge 4		0.051
			max		0.063
Configuration 2	Operating Real Product (Power 50~55% charging)	Edge 2		0.053	
		max		0.060	

TEST results of DUT to phone test Configuration 3 & 4

FCC RF Exposure Result								
Test Configuration	Test mode	Test distance	Test Position	H-Field Limit (A/m)	H-Field meas data (A/m)			
Configuration 3	Operating Real Product (Power <10% charging)	15 cm probe to edges of EUT and 20 cm probe to top surface of the EUT	Top - charger above client	1.63	0.064			
			Top - charger below client		0.064			
			Edge 1		0.064			
			Edge 2		0.178			
			Edge 3		0.077			
			Edge 4		0.157			
			max		0.193			
	Operating Real Product (Power 50~55% charging)		Top - charger above client		0.064			
			Top - charger below client		0.071			
			Edge 1		0.081			
			Edge 2		0.129			
			Edge 3		0.080			
			Edge 4		0.222			
			max		0.239			
	Operating Real Product (Power 90~95% charging)		Top - charger above client		0.065			
			Top - charger below client		0.061			
			Edge 1		0.062			
			Edge 2		0.186			
			Edge 3		0.069			
			Edge 4		0.140			
			max		0.208			
			Configuration 4		Operating Real Product (Power 50~55% charging)	Edge 2		0.222
						max		0.246

TEST results of DUT to phone test Configuration 5 & 6

FCC RF Exposure Result					
Test Configuration	Test mode	Test distance	Test Position	H-Field Limit (A/m)	H-Field meas data (A/m)
Configuration 5	Operating Real Product (Power <10% charging)	15 cm probe to edges of EUT and 20 cm probe to top surface of the EUT	Top - charger below client	1.63	0.064
			Edge 1		0.053
			Edge 2		0.074
			Edge 3		0.062
			Edge 4		0.069
			max		0.087
	Operating Real Product (Power 50~55% charging)		Top - charger below client		0.058
			Edge 1		0.053
			Edge 2		0.068
			Edge 3		0.055
			Edge 4		0.060
			max		0.073
	Operating Real Product (Power 90~95% charging)		Top - charger below client		0.063
			Edge 1		0.051
			Edge 2		0.066
			Edge 3		0.059
			Edge 4		0.055
			max		0.069
Configuration 6	Operating Real Product (Power <10% charging)	Edge 2		0.119	
		max		0.125	

6.2.2. FCC SUMMARY OF RESULTS

H-Field Limit		
FCC RF Exposure	Maximum meas data (A/m)	Percentage (%)
1.63	0.246	15.09

Conclusion:

H-Field result is less than 50% of the MPE limit.