


EMC TEST REPORT

Project No.	LBE20190805		Issue No.	3
Applicant	Name of organization	Samsung Electronics Co., Ltd.		
	Address	(Maetan-dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Republic of Korea		
	Date of application	May 22, 2019		
EUT	Type of device	<input checked="" type="checkbox"/> All other Receivers subject to part15 <input checked="" type="checkbox"/> Class B Personal Computers and peripherals <input checked="" type="checkbox"/> Other Class B digital devices and peripherals <input type="checkbox"/> FM Broadcast Receiver		
	Equipment authorization	<input checked="" type="checkbox"/> Certification <input type="checkbox"/> Supplier's Declaration of Conformity		
	FCC ID	A3LSMN976V		
	Kind of product	Mobile Phone		
	Model No.	SM-N976V		
	Variant Model No.	Refer to clause 4.6		
Manufacturer	SAMSUNG ELECTRONICS CO., LTD 94-1, Imsu-dong, Gumi-si, Gyengsangbuk-do, 730-722, Republic of Korea			
	SAMSUNG ELECTRONICS HUIZHOU CO.,LTD. 516229, Chenjiang Town, HuiZhou City, Guangdong Province, China			
Applied Standards		47 CFR Part 15, Subpart B, Class B / ANSI C63.4-2014		
Test Period		June 13, 2019 ~ June 19, 2019		
Issue date		July 12, 2019		
Test result : Complied The equipment under test has found to be compliant with the applied standards. (Refer to the attached test result for more detail.)				
Tested by : Eun-Kyung Oh		Reviewed by : Young-Hun Kim		
 				

The test results in this report only apply to the tested sample. This report must not be reproduced, except in full, without written permission from Global CS Center.

Table of contents

1. Report Information

1.1 Revision history	3
1.2 RSE test report no.	3

2. Summary of test results

2.1 Emission	3
--------------------	---

3. General Information

3.1 Test facility	3
-------------------------	---

4. Test Configuration

4.1 Test Peripherals	4
4.2 EUT operating mode	5
4.3 Details of Sampling	5
4.4 Used cable description	6
4.5 Test arrangement	7
4.6 EUT Description	10
4.7 EUT Frequencies	10
4.8 Test configuration and condition	11
4.9 Measurement uncertainty	11

5. Result of individual tests

5.1 Conducted disturbance	12
5.2 Radiated disturbance	17

1. Report Information

1.1 Revision history

No.	Revised detailed information
Issue 0	There are no revisions and this version is basic test report.
Issue 1	Added variant model.
Issue 2	Changed Battery and Headset model name as per customer's request. EUT Frequencies was corrected. Corrected Note1 about frequencies above 1 GHz.
Issue 3	Licensed band test report number changed in clause 1.2

1.2 RSE test report no.

No.	Remark
1M1905130071-23	The cellular receiver mode refers to the radiated spurious emissions test report.

2. Summary of test results

2.1 Emission

The EUT has been tested according to the following specifications:

Applied	Test type	Applied standard	Result
<input checked="" type="checkbox"/>	Conducted Disturbance (Mains port)	47 CFR Part 15 Subpart B / ANSI C63.4-2014 (Class B)	Complied
<input checked="" type="checkbox"/>	Radiated Disturbance		Complied

3. General Information

3.1 Test facility

The Global CS Center is located on Samsung Electronics Co., Ltd. at (Maetan-dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Republic of Korea.

All testing are performed in Semi-anechoic chambers conforming to the site attenuation characteristics defined by ANSI C63.4, CISPR 32, CISPR 16-1-4 and Shielded rooms.

And all antennas are properly calibrated using ANSI C63.5:2017.

The Global CS Center is operated as testing laboratory in accordance with the requirements of ISO/IEC 17025:2005.

4. Test Setup configuration

4.1 Test Peripherals

The cables used for these peripherals are either permanently attached by the peripheral manufacturer or coupled with an assigned cable as defined below.

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Mark	Description	Model No.	Serial No.	Manufacturer / Trademark	FCC ID
A	Mobile Phone	SM-N976V	-	SAMSUNG	A3LSMN976V
B	Battery	EB-BN972ABU L	-	SAMSUNG	-
C	Headset	YBD-19HS-013	-	SAMSUNG	-
D	Data Cable	EP-DG977BBZ	-	SAMSUNG	-
E	Micro SD Card	64GB	-	SAMSUNG	-
F	Laptop Computer	Latitude5580	1CHRYM2	Dell	-
			D3HRYM2	Dell	-
G	Laptop AC Adapter	LA65NM130	5D77	Dell	-
			5B3C	Dell	-
H	Mouse	AA-SM7PCPB	CN57BA5903634AD V8JK281082	SAMSUNG	-
			CNBA5903634ADV8 J31O3050	SAMSUNG	-
I	Router	DIR-806A	RF0F1D5000688	D-Link	-
			RF0F1D8011504	D-Link	
J	Travel Adapter	EP-TA800	R37M4CA0011DK3	SAMSUNG	
K	DP Monitor	27UD88	711NTQD8H004	LG	
L	DP Monitor AC Adapter	LCAP31	EH8NN6294900550 62	LG	
M	DP Cable	JCA141	BW2K1709000770	J5CREATE	
N	OTG Gender	EE-UG970	-	SAMSUNG	-
O	USB Memory Stick	64GB	-	Sandisk	-

4.2 EUT operating mode

To achieve compliance applied standard specification, the following mode(s) were made during compliance testing:

4.2.1 Conducted Emission

No.	Operating mode
1	Camera (rear) + Charging (w/ TA) + Cellular receiver (LTE FDD26 Center Frequency)
2	Camera (front) + Charging (w/ TA)
3	Video + Audio playback from internal memory data + Charging (w/ TA)
4	USB Data Communication with PC (from external memory data)

4.2.2 Radiated Emission

No.	Operating mode
1	Camera (rear) + Charging (w/ TA)
2	Camera (front) + USB OTG (w/ USB gender: memory stick)
3	Video + Audio playback from internal memory data (w/ Headset)
4	Video + Audio playback from internal memory data + Display out (w/ USB to Direct DP Cable)
5	USB Data Communication with PC (from external memory data)

4.3 Details of Sampling

Customer selected, single unit.


4.4 Used cable description

The EUT is configured, installed, arranged and operated in a manner consistent with typical applications. Interface cables/loads/devices are connected to at least one of each type of interface port of the EUT, and where practical, each cable shall be terminated in a device typical of actual usage. The type(s) of interconnecting cables to be used and the interface port (of the EUT) to which these were connected:


No.	Connected cable	Length [m]	Shielded [Y/N]	Note
1	Data Cable	1.0	Y	From EUT to Laptop Computer
2	Headset	1.2	N	For EUT
3	Power	1.8	N	For Laptop Computer to Laptop AC Adapter
4	Power	1.5	N	For Laptop AC Adapter
5	LAN	1.5	Y	From Laptop Computer to Router
6	USB	0.8	N	From Laptop Computer to Router for DC Power
7	USB	1.8	N	From Laptop Computer to Mouse
8	DP Cable	1.1	Y	From EUT to DP Monitor
9	Power	1.2	N	From DP Monitor to DP Monitor AC Adapter
10	Power	1.8	N	For DP Monitor AC Adapter

4.5 Test arrangement

4.5.1 Conducted Emission

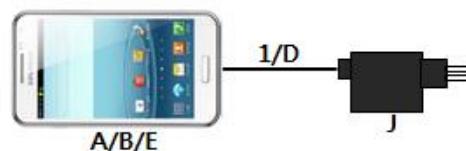


[Mode 1 - 3]

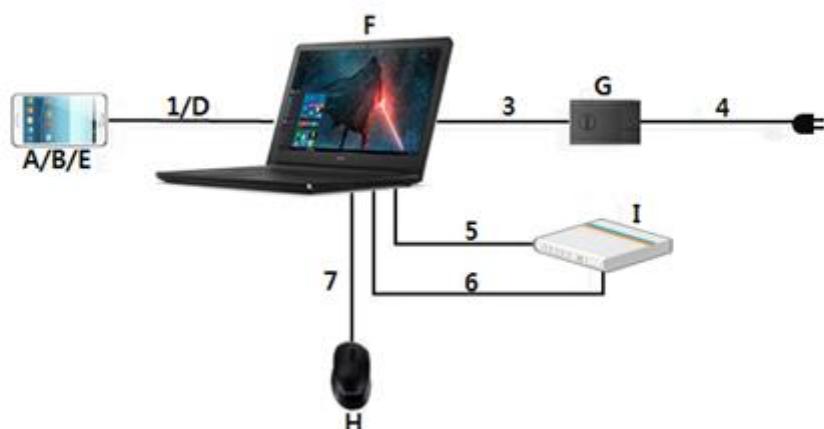

[Mode 4]

4.5.2 Radiated Emission

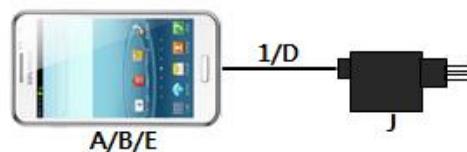


[Mode 1]




[Mode 2]



[Mode 3]

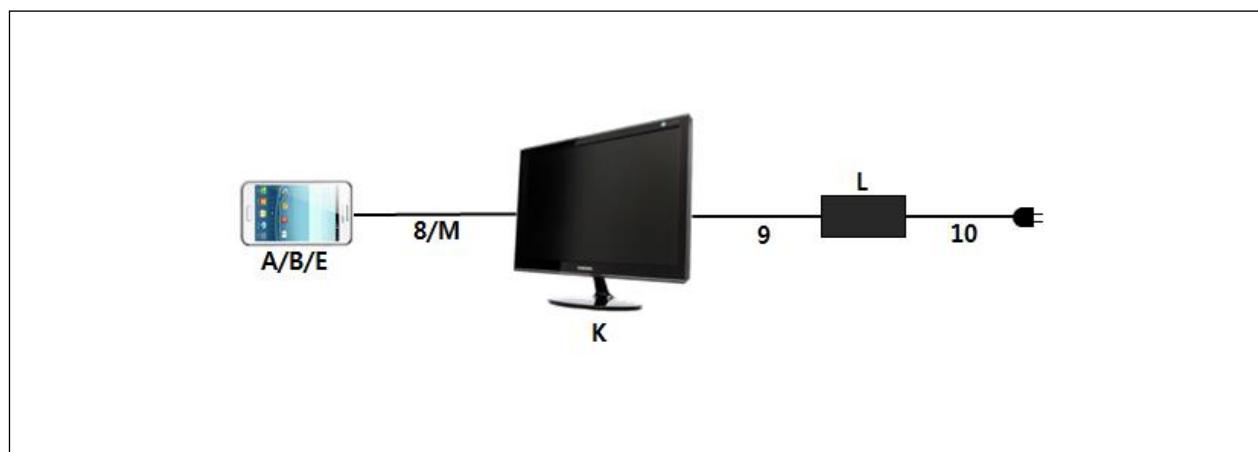

[Mode 4]

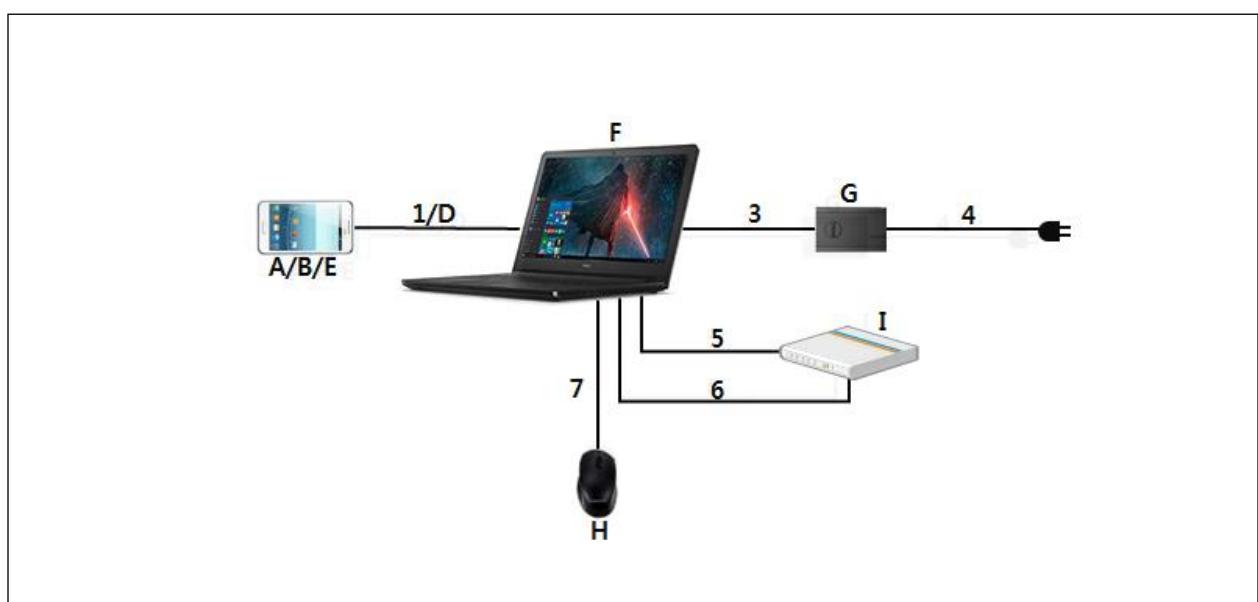

[Mode 5]

4.6 EUT Description

The EUT is a bar type Mobile Phone which can operate on GSM850/900/1800/1900, WCDMA FDD1/2/5/8, LTE FDD2/3/4/5/7/8/12/13/18/19/20/26/28/66, LTE TDD38/39/40/41/46/48, CDMA BC0/1, TD-SCDMA B34/39 and Incorporates a camera, Bluetooth, ANT+, Wi-Fi, GNSS, NFC, Wireless Charging, MST, OTG, DP, Audio and Video.

4.6.1 The variant models

- SM-N976XU

4.7 EUT Frequencies

The highest frequencies (Generated and used)	Frequency [MHz]
NR n260	40 000

4.8 Test configuration and condition

The system was configured for testing in a typical fashion that a customer would normally use. Cables were attached to each of the available I/O Ports. Where applicable, peripherals were attached to the I/O cables. All the external I/O ports are exercised, as well as internal and the external SD card, by writing and reading arbitrary data or charging with TA.

The EUT was investigated in three orientations and the worst case orientation is reported.

Cellular RX mode testing was performed with the LTE FDD26 RX Test mode at center frequency. All licensed communication Cellular RX mode, GSM/WCDMA/LTE, test results are not significantly different.

The video and music were repetitively played connected to the earphone.

The video and music were played on monitor through Display Out function using direct DP Cable or DP converter.

The camera of the EUT was operated continuously.

The EUT was connected to USB Memory stick using USB OTG gender.

Power source for the EUT operating was supplied by CVCF made by the Pacific Corp.

- Test Voltage : AC 120 V, 60 Hz

4.9 Measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus: (According to CISPR 16-4-2 and UKAS M3003)

4.9.1 Emission

Test type		Measurement uncertainty (C.L. 95 %, k = 2)
Conducted disturbance	AC Mains	2.83 dB
Radiated Disturbance (Below 1 GHz)	Horizontal	4.99 dB
	Vertical	4.90 dB
Radiated Disturbance (Above 1 GHz)	Horizontal	5.33 dB
	Vertical	5.32 dB

5. Results of individual test

5.1 Conducted disturbance

The EUT is connected to a LISN via travel adapter. If the EUT is connected to the Laptop Computer USB port, the Laptop AC adapter is connected to a LISN.

Both conducted lines are measured in Quasi-Peak and CISPR-Average mode, including the worst-case data points for each tested configuration. The EUT measured in accordance with the methods described in standards.

Limits for conducted disturbance at the mains ports of Class B ITE

Frequency range Limits [MHz]	Resolution Bandwidth [kHz]	Limits [dB(μV)]	
		Quasi-peak	Average
0,15 to 0,50	9	66 to 56	56 to 46
0,50 to 5	9	56	46
5 to 30	9	60	50

NOTE 1 The lower limit shall apply at the transition frequency.
 NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

5.1.1 Test instrumentation


EMC No.	Test Instrument	Model name	Manufacturer	Serial No.	Calibration	
					Date	Interval (Month)
E5I-171	LTE Communicator	CMW500	R&S	154667	2018-08-07	12
E5I-017	EMI Test Receiver	ESU8	R&S	100483	2019-01-16	12
E5I-127	LISN	ENV216	R&S	102061	2018-07-23	12
-	Test software	EMC32	R&S	Ver 9.26.01	-	-

5.1.2 Temperature and humidity condition

Test date	2019-06-19	Test engineer	Eun-Kyung Oh
Climate condition	Ambient temperature	(21.3 ~ 21.6) °C	Limit (15.0 to 35.0) °C
	Relative humidity	(49.7 ~ 50.0) % R.H.	Limit (25.0 to 75.0) % R.H.
	Atmospheric pressure	(100.2 ~ 100.5) kPa	Limit (86.0 to 106.0) kPa
Test place	Shield Room (SR8)		

5.1.3 Test results

Operating Mode 1: AC Mains

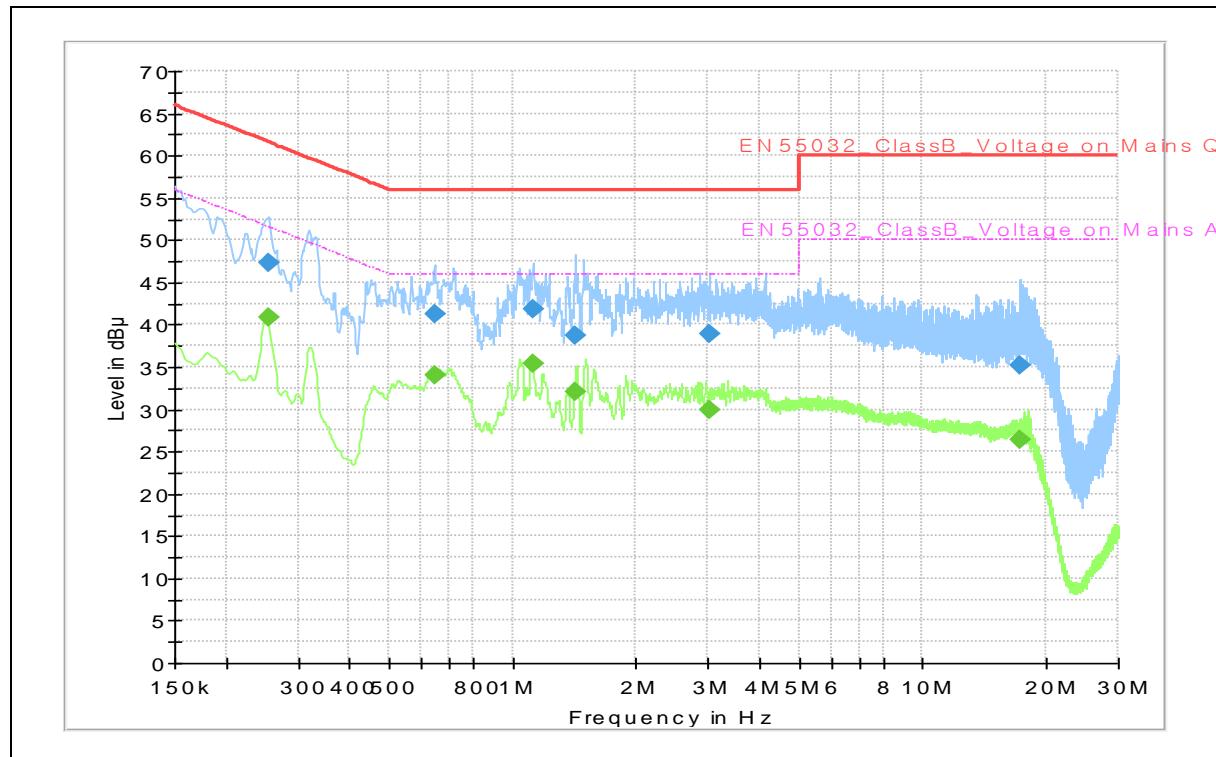


Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

QP / CAV final measurement results table:

Frequency (MHz)	QP (dB μ V)	CAV (dB μ V)	Limit (dB μ V)	Margin (dB)	Line	Corr. (dB)
0.254	47.4	---	61.6	14.2	N	9.7
0.254	---	40.8	51.6	10.8	N	9.7
0.645	41.3	---	56.0	14.7	L1	10.2
0.645	---	34.1	46.0	11.9	L1	10.2
1.120	41.9	---	56.0	14.1	L1	10.0
1.120	---	35.5	46.0	10.5	L1	10.0
1.424	38.8	---	56.0	17.2	L1	10.0
1.424	---	32.1	46.0	13.9	L1	10.0
3.028	38.9	---	56.0	17.1	L1	10.0
3.028	---	30.0	46.0	16.0	L1	10.0
17.327	35.2	---	60.0	24.8	L1	10.5
17.327	---	26.4	50.0	23.6	L1	10.5

Note 2) Level (QP and/or CAV) = Meter Reading (QP and/or CAV) + Corr. (LISN Insertion Loss + Cable Loss)
 Margin (QP and/or CAV) = Limit – Level (QP and/or CAV)
 QP = Quasi-Peak, CAV = CISPR-Average, Corr. = Correction Factor

Operating Mode 2: AC Mains

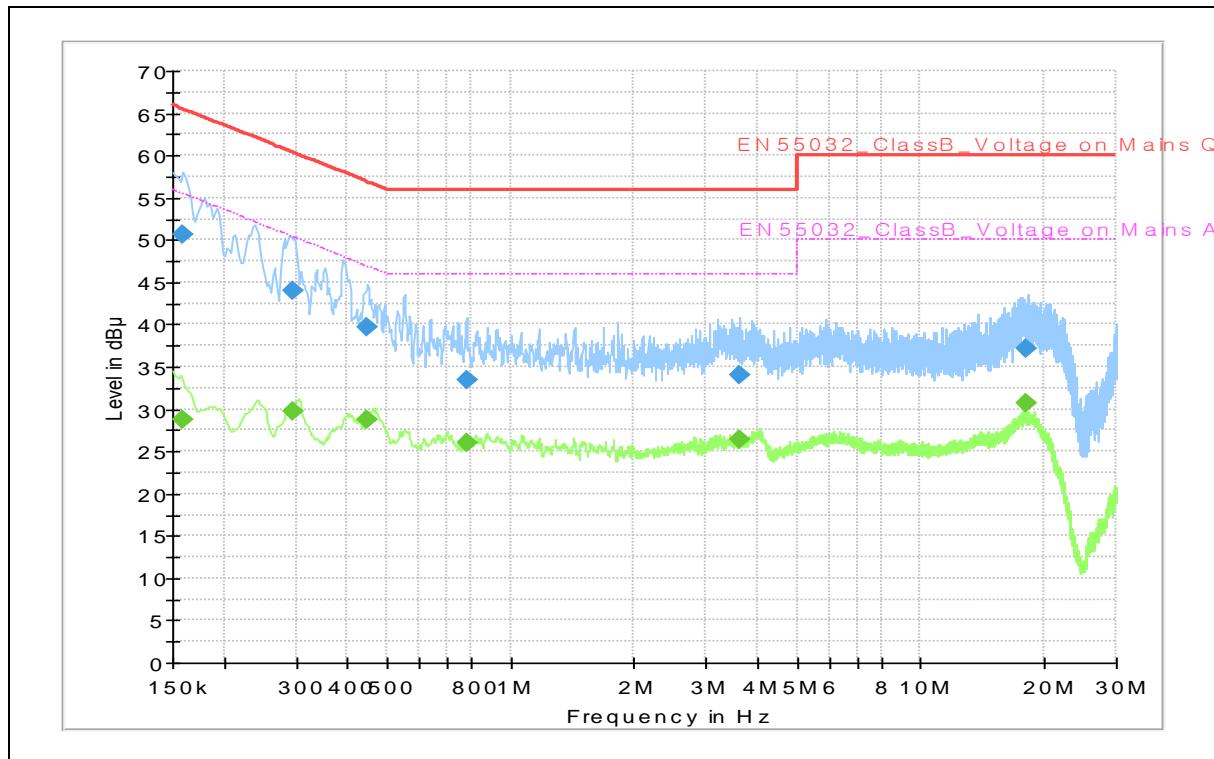

Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

QP / CAV final measurement results table:


Frequency (MHz)	QP (dB μ V)	CAV (dB μ V)	Limit (dB μ V)	Margin (dB)	Line	Corr. (dB)
0.159	---	28.8	55.5	26.7	N	9.9
0.159	50.6	---	65.5	14.9	N	9.9
0.296	44.1	---	60.3	16.2	N	9.9
0.296	---	29.7	50.3	20.6	N	9.9
0.447	39.7	---	56.9	17.2	L1	10.2
0.447	---	28.6	46.9	18.3	L1	10.2
0.780	---	26.0	46.0	20.0	N	10.0
0.780	33.4	---	56.0	22.6	N	10.0
3.631	34.0	---	56.0	22.0	L1	10.0
3.631	---	26.4	46.0	19.6	L1	10.0
18.004	37.1	---	60.0	22.9	L1	10.5
18.004	---	30.6	50.0	19.4	L1	10.5

Note 2) Level (QP and/or CAV) = Meter Reading (QP and/or CAV) + Corr. (LISN Insertion Loss + Cable Loss)

Margin (QP and/or CAV) = Limit – Level (QP and/or CAV)

QP = Quasi-Peak, CAV = CISPR-Average, Corr. = Correction Factor

Operating Mode 3: AC Mains

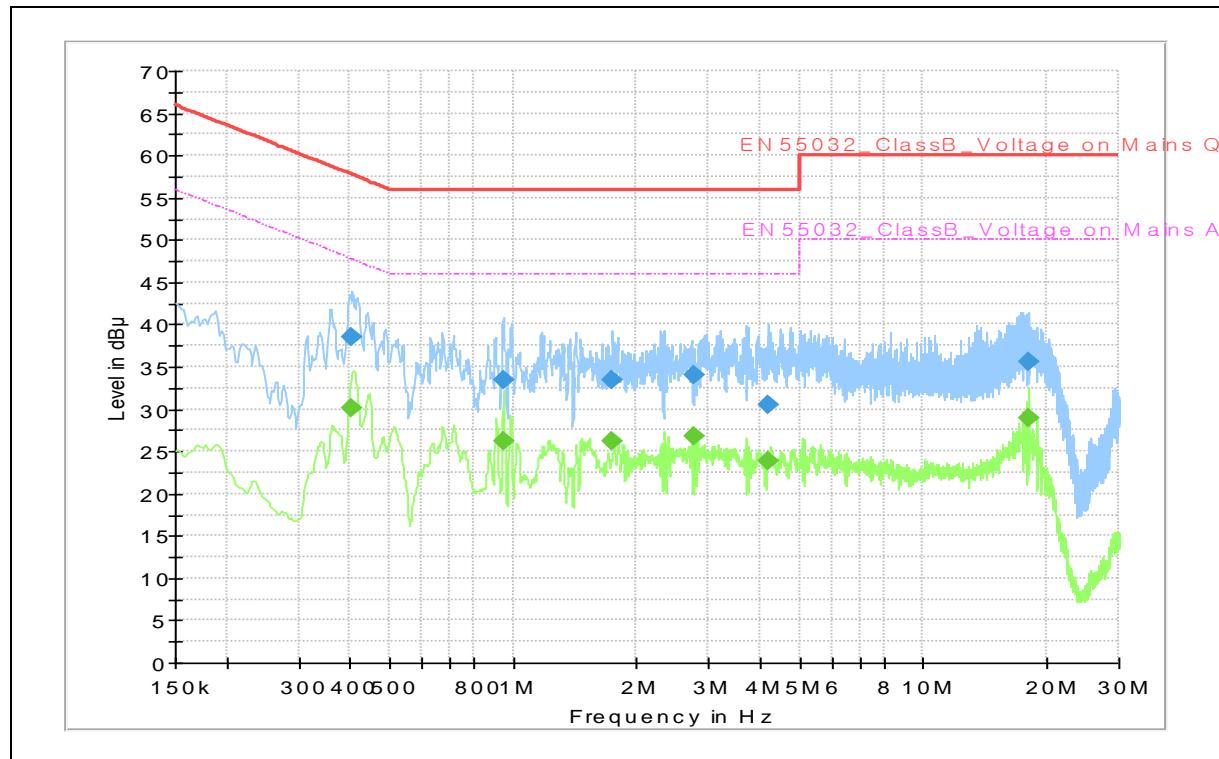

Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

QP / CAV final measurement results table:


Frequency (MHz)	QP (dB μ V)	CAV (dB μ V)	Limit (dB μ V)	Margin (dB)	Line	Corr. (dB)
0.404	38.5	---	57.8	19.3	N	10.1
0.404	---	30.1	47.8	17.7	N	10.1
0.944	33.3	---	56.0	22.7	N	10.0
0.944	---	26.3	46.0	19.7	N	10.0
1.750	33.4	---	56.0	22.6	N	9.9
1.750	---	26.1	46.0	19.9	N	9.9
2.771	33.9	---	56.0	22.1	N	9.9
2.771	---	26.9	46.0	19.1	N	9.9
4.191	---	23.9	46.0	22.1	L1	10.0
4.191	30.5	---	56.0	25.5	L1	10.0
17.995	---	29.0	50.0	21.0	L1	10.5
17.995	35.6	---	60.0	24.4	L1	10.5

Note 2) Level (QP and/or CAV) = Meter Reading (QP and/or CAV) + Corr. (LISN Insertion Loss + Cable Loss)

Margin (QP and/or CAV) = Limit – Level (QP and/or CAV)

QP = Quasi-Peak, CAV = CISPR-Average, Corr. = Correction Factor

Operating Mode 4: AC Mains

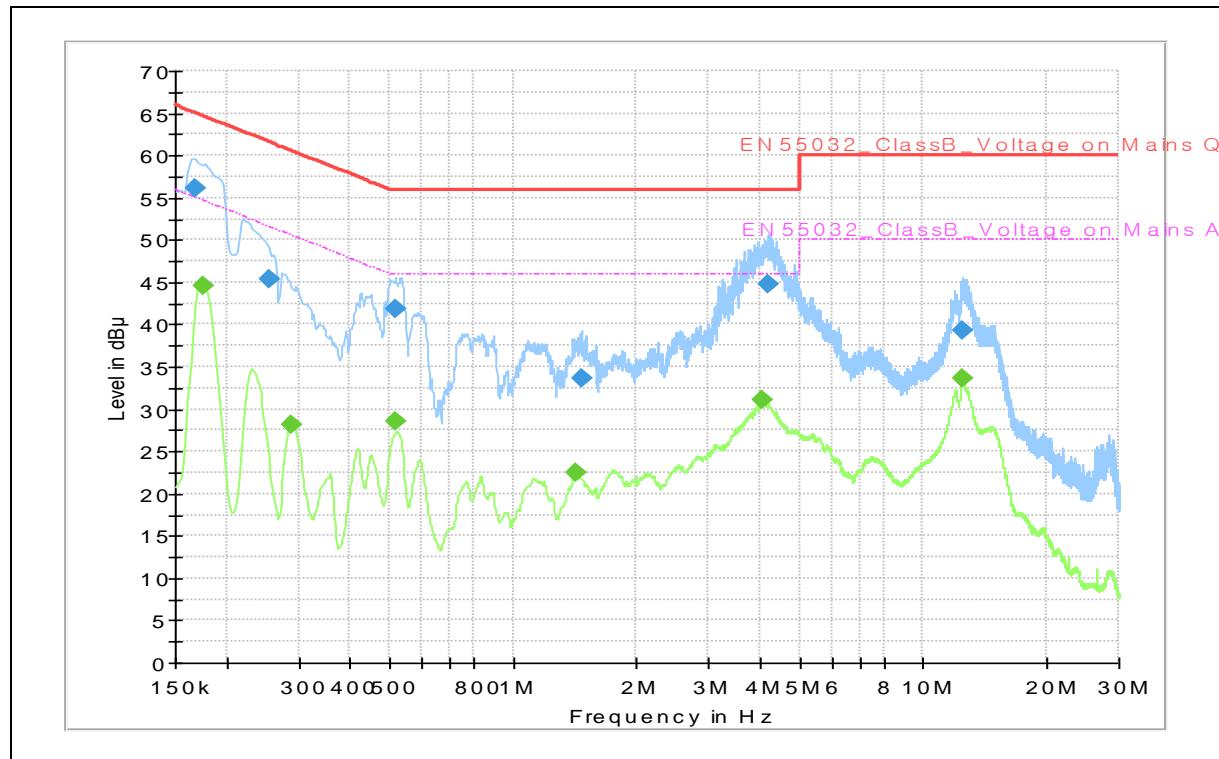

Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

QP / CAV final measurement results table:

Frequency (MHz)	QP (dB μ V)	CAV (dB μ V)	Limit (dB μ V)	Margin (dB)	Line	Corr. (dB)
0.168	56.2	---	65.1	8.9	L1	9.8
0.175	---	44.6	54.7	10.1	N	9.8
0.256	45.4	---	61.6	16.2	L1	9.7
0.290	---	28.1	50.5	22.4	N	9.8
0.517	41.8	---	56.0	14.2	L1	10.0
0.519	---	28.5	46.0	17.5	L1	10.0
1.419	---	22.4	46.0	23.6	N	9.8
1.464	33.6	---	56.0	22.4	N	9.8
4.072	---	31.0	46.0	15.0	N	9.7
4.198	44.8	---	56.0	11.2	N	9.7
12.471	---	33.6	50.0	16.4	L1	9.9
12.532	39.3	---	60.0	20.7	L1	9.9

Note 2) Level (QP and/or CAV) = Meter Reading (QP and/or CAV) + Corr. (LISN Insertion Loss + Cable Loss)
 Margin (QP and/or CAV) = Limit – Level (QP and/or CAV)

QP = Quasi-Peak, CAV = CISPR-Average, Corr. = Correction Factor

5.2 Radiated disturbance

The following data lists the significant emission frequencies, measured levels, correction factors (for antenna and cables), orientation of table, polarization and height of antenna, the corrected reading, the limit, and the amount of margin.

Peak measurements were made over the changeable frequency range 30 MHz to 1 GHz at a measurement distance of 10 m for the following antenna and turntable arrangements:

Antenna Height [cm]	Antenna Polarisation	Resolution Bandwidth [kHz]	Video Bandwidth [kHz]	Turntable position [degrees]
100 ~ 400	Horizontal, Vertical	120	300	Continuous

Measurements within 6 dB of the limit were then maximized by adjusting turntable position. Final measurements were made using quasi-peak detector.

Peak/CISPR-Average measurements were made over the changeable frequency range 1 GHz to 40 GHz or 5th harmonics of the highest frequency generated or used in the device or on which the device operate or tunes at a measurement distance of 3 m for the following antenna and turntable arrangements. The measurements above 1 GHz were performed with the bore-sighting antenna aimed at the EUT.

Antenna Height [cm]	Antenna Polarisation	Resolution Bandwidth [MHz]	Video Bandwidth [MHz]	Turntable position
100 ~ 400	Horizontal, Vertical	1	3	Continuous

Measurements within 6 dB of the limit were then maximized by adjusting turntable position. Final measurements were made using peak and CISPR-average detectors.

Limits for radiated disturbance of Class B ITE at a measuring distance of 3 m and 10 m

Frequency range Limits [MHz]	Field Strength		
	3 m [μ V/m]	3 m [dB(μ V/m)]	10 m [dB(μ V/m)]
30 to 88	100	40.0	29.5
88 to 216	150	43.5	33.0
216 to 960	200	46.0	35.5
Above 960	500	54.0	43.5

Results checked manually; and points close to the limit line were re-measured.

5.2.1 Test instrumentation

EMC No.	Test Instrument	Model name	Manufacturer	Serial No.	Calibration	
					Date	Interval (Month)
E5I-016	EMI Test Receiver	ESU8	R&S	100482	2019-05-29	12
E5I-021	EMI Test Receiver	ESU40	R&S	100376	2019-01-30	12
E5I-149	Horn Antenna	HF907	R&S	102525	2018-06-15	24
E5I-039	Signal Conditioning Unit	SCU-18	R&S	10211	2019-01-23	12
E5I-037	WideBand Horn Antenna	WBH 18-40K	R&S	11201	2019-01-31	24
E5I-042	Signal Conditioning Unit	SCU-40A	R&S	10004	2018-09-05	12
E5I-120	BiLog Antenna	CBL6112D	TESEQ	36997	2018-04-23	24
E5I-072	BiLog Antenna	CBL6112D	TESEQ	36009	2018-04-23	24
E5I-073	Preamplifier	310N	SONOMA	332016	2019-05-09	12
E5I-074	Preamplifier	310N	SONOMA	332017	2019-05-09	12
-	Test software	EP7RE	TOYO	Ver 5.8.2	-	-
-	Test software	EMC32	R&S	Ver 9.25.00	-	-


5.2.2 Temperature and humidity condition

Test date	2019-06-13 ~ 2019-06-14	Test engineer	Eun-Kyung Oh
Climate condition	Ambient temperature	(22.0 ~ 22.3) °C	Limit (15.0 to 35.0) °C
	Relative humidity	(48.4 ~ 48.7) % R.H.	Limit (25.0 to 75.0) % R.H.
	Atmospheric pressure	(100.3 ~ 100.6) kPa	Limit (86.0 to 106.0) kPa
Test place	Semi-Anechoic Chamber (SAC4)		

5.2.3 Test results

Operating Mode 1

- Frequencies below 1 GHz

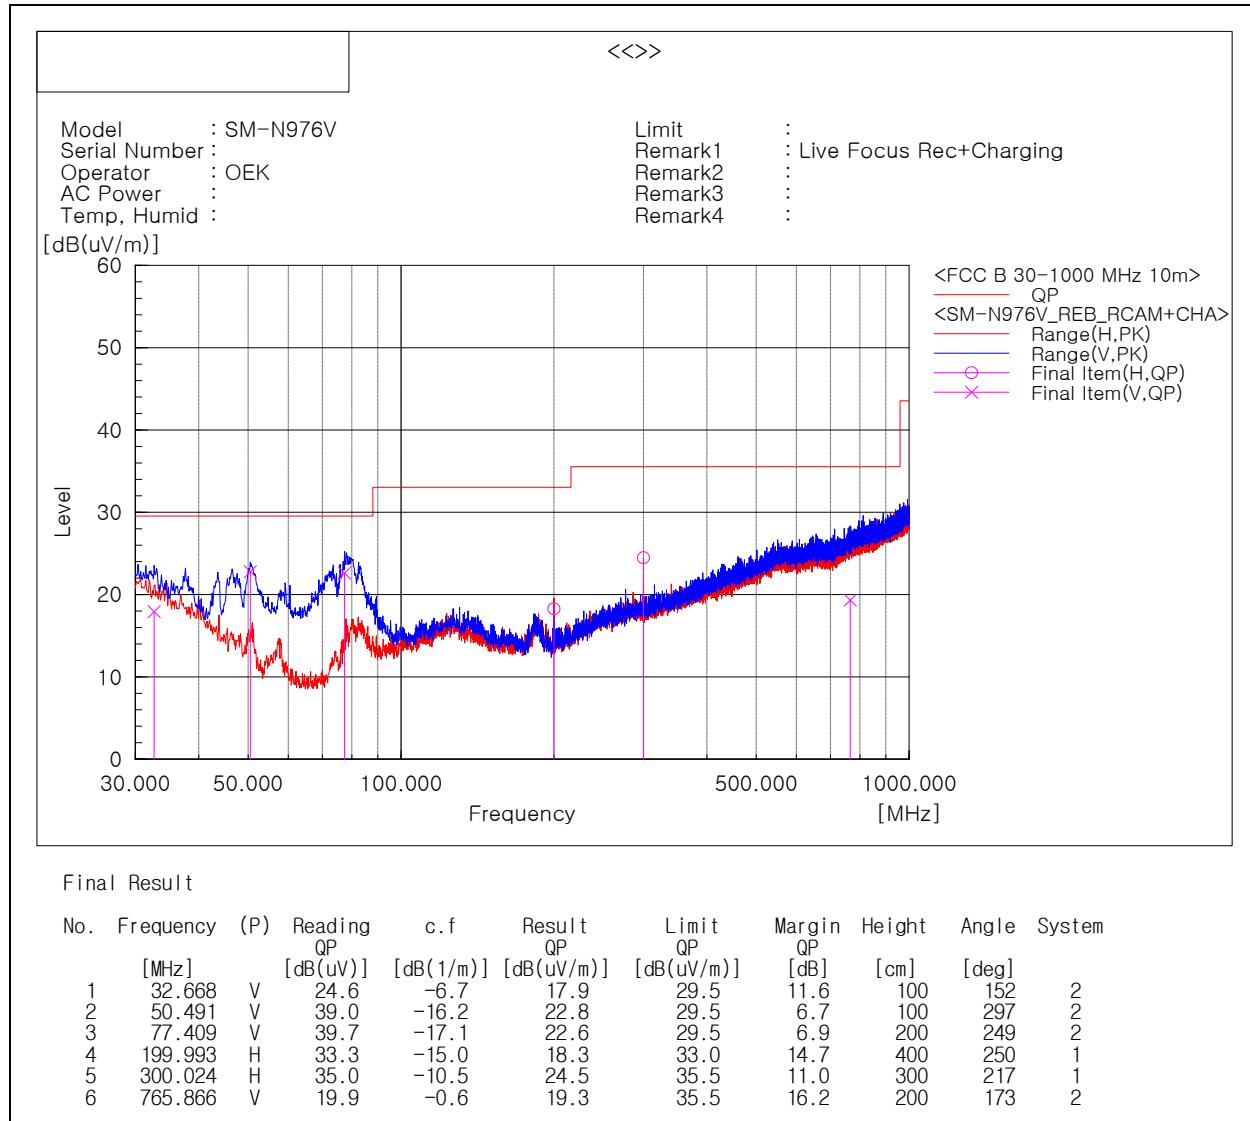

Note1) Receiving antenna polarization : Horizontal, Vertical


Test Distance : 10 m, Antenna Height : 1 to 4 meters

Result (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit – Level (QP)

QP = Quasi-Peak, c.f = Correction Factor

- Frequencies above 1 GHz

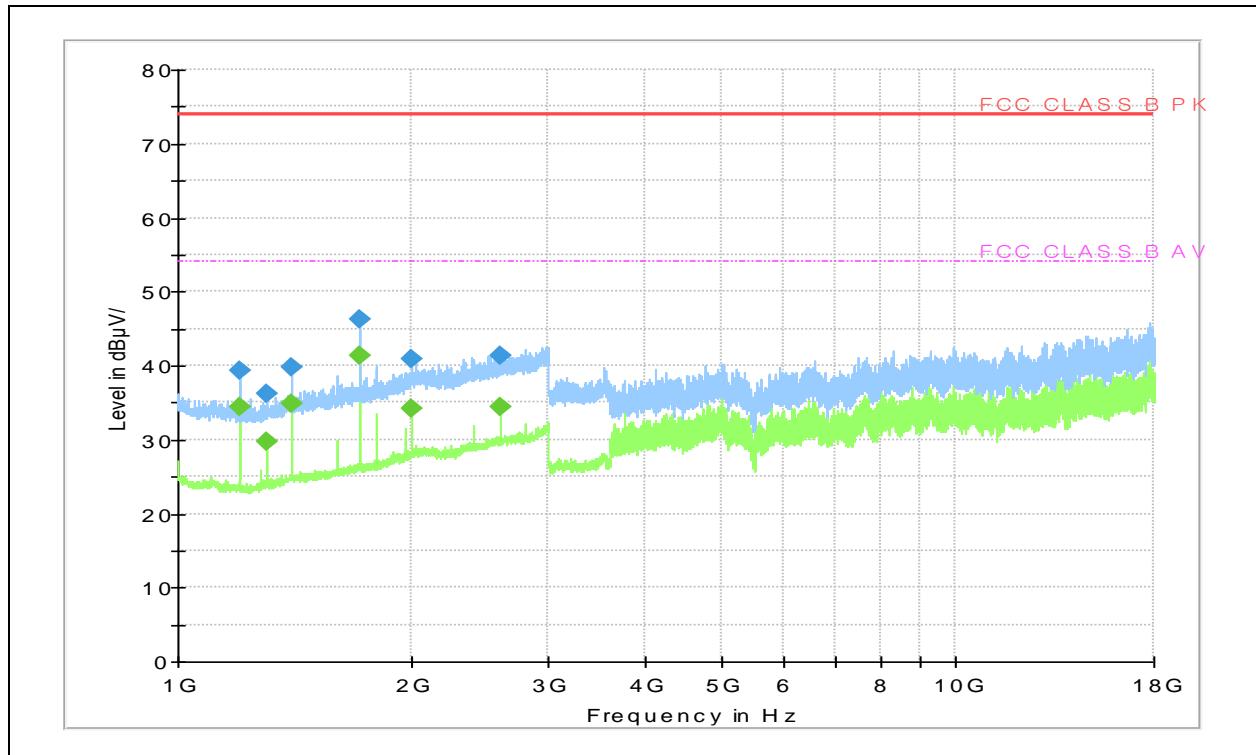

Frequency (MHz)	PK (dB μ V/m)	CAV (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1 199.500	39.2	---	74.0	34.8	261.0	H	259.0	6.1
1 199.500	---	34.5	54.0	19.5	142.0	H	259.0	6.1
1 300.000	---	29.6	54.0	24.4	239.0	H	156.0	7.0
1 300.500	36.1	---	74.0	37.9	109.0	V	228.0	7.0
1 400.000	---	34.8	54.0	19.2	185.0	V	2.0	7.9
1 400.000	39.7	---	74.0	34.3	202.0	V	2.0	7.9
1 717.000	46.3	---	74.0	27.7	248.0	H	75.0	10.2
1 717.500	---	41.3	54.0	12.7	311.0	H	156.0	10.2
1 999.500	40.9	---	74.0	33.1	346.0	H	81.0	12.3
1 999.500	---	34.2	54.0	19.8	214.0	H	81.0	12.3
2 600.000	---	34.5	54.0	19.5	165.0	H	299.0	14.5
2 600.500	41.3	---	74.0	32.7	108.0	V	199.0	14.5

Note 1) We have also tested from 18 GHz to 40 GHz and found no emissions

Note 2) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters


Level (PK and/or CAV) = Reading (PK and/or CAV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or CAV) = Limit - Level (PK and/or CAV)

PK = Peak, CAV = CISPR-Average, Corr. = Correction Factor

□ Operating Mode 2

- Frequencies below 1 GHz

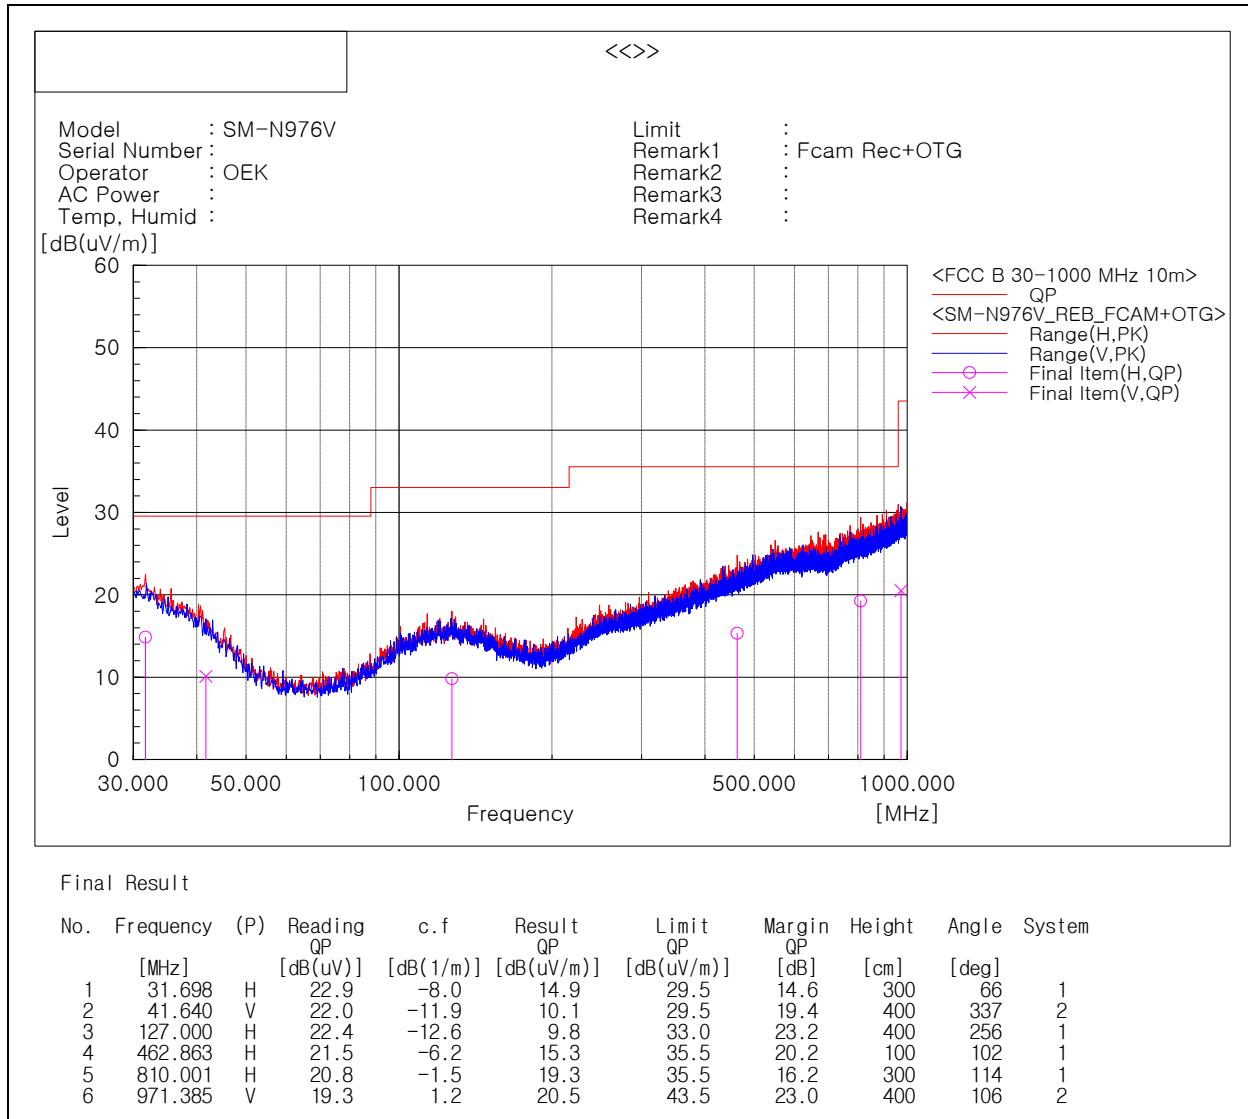

Note1) Receiving antenna polarization : Horizontal, Vertical


Test Distance : 10 m, Antenna Height : 1 to 4 meters

Result (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit – Level (QP)

QP = Quasi-Peak, c.f = Correction Factor

- Frequencies above 1 GHz

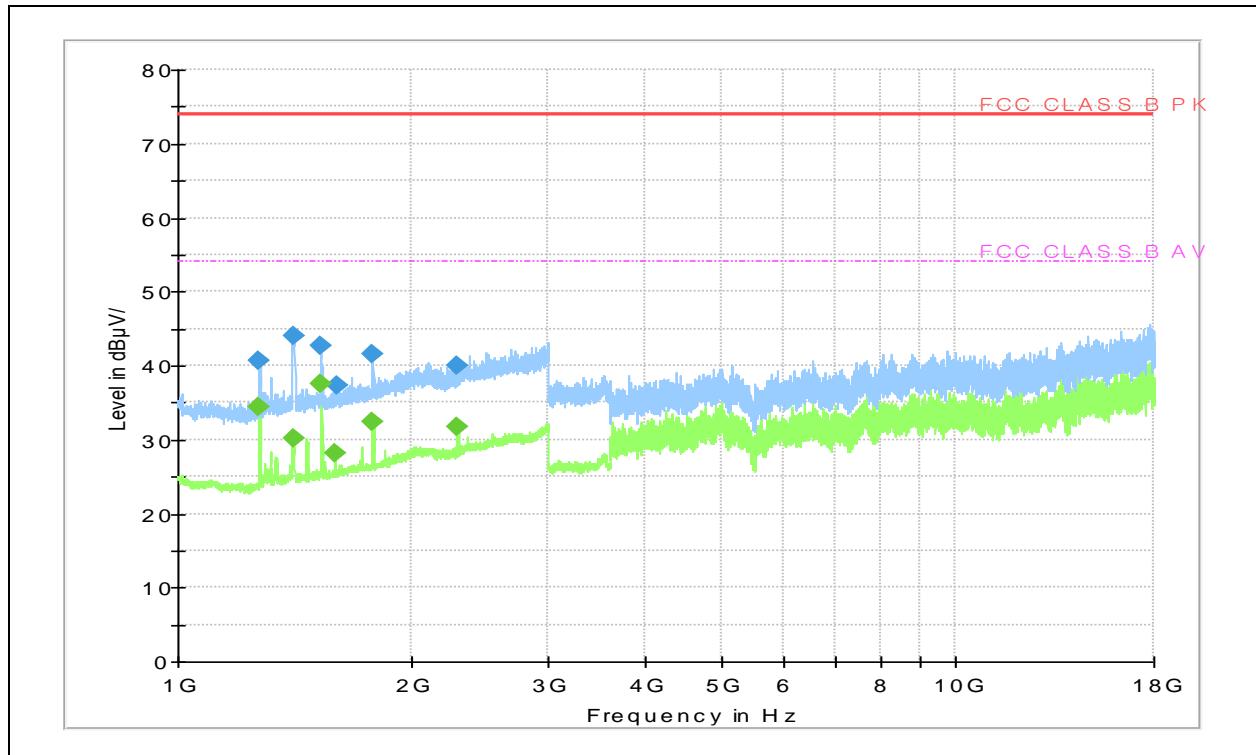

Frequency (MHz)	PK (dB μ V/m)	CAV (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1 272.500	40.6	---	74.0	33.4	112.0	H	303.0	6.7
1 273.000	---	34.3	54.0	19.7	145.0	H	298.0	6.8
1 411.500	---	30.1	54.0	23.9	194.0	H	79.0	8.0
1 411.500	44.1	---	74.0	29.9	205.0	H	79.0	8.0
1 525.000	42.7	---	74.0	31.3	264.0	H	85.0	8.9
1 525.000	---	37.6	54.0	16.4	249.0	H	85.0	8.9
1 590.000	---	28.1	54.0	25.9	305.0	H	240.0	9.3
1 599.500	37.3	---	74.0	36.7	187.0	H	142.0	9.4
1 781.500	---	32.3	54.0	21.7	232.0	H	200.0	10.5
1 781.500	41.5	---	74.0	32.5	121.0	H	200.0	10.5
2 287.000	40.0	---	74.0	34.0	263.0	V	335.0	12.6
2 290.500	---	31.8	54.0	22.2	196.0	H	258.0	12.7

Note 1) We have also tested from 18 GHz to 40 GHz and found no emissions

Note 2) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters


Level (PK and/or CAV) = Reading (PK and/or CAV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or CAV) = Limit - Level (PK and/or CAV)

PK = Peak, CAV = CISPR-Average, Corr. = Correction Factor

Operating Mode 3

- Frequencies below 1 GHz

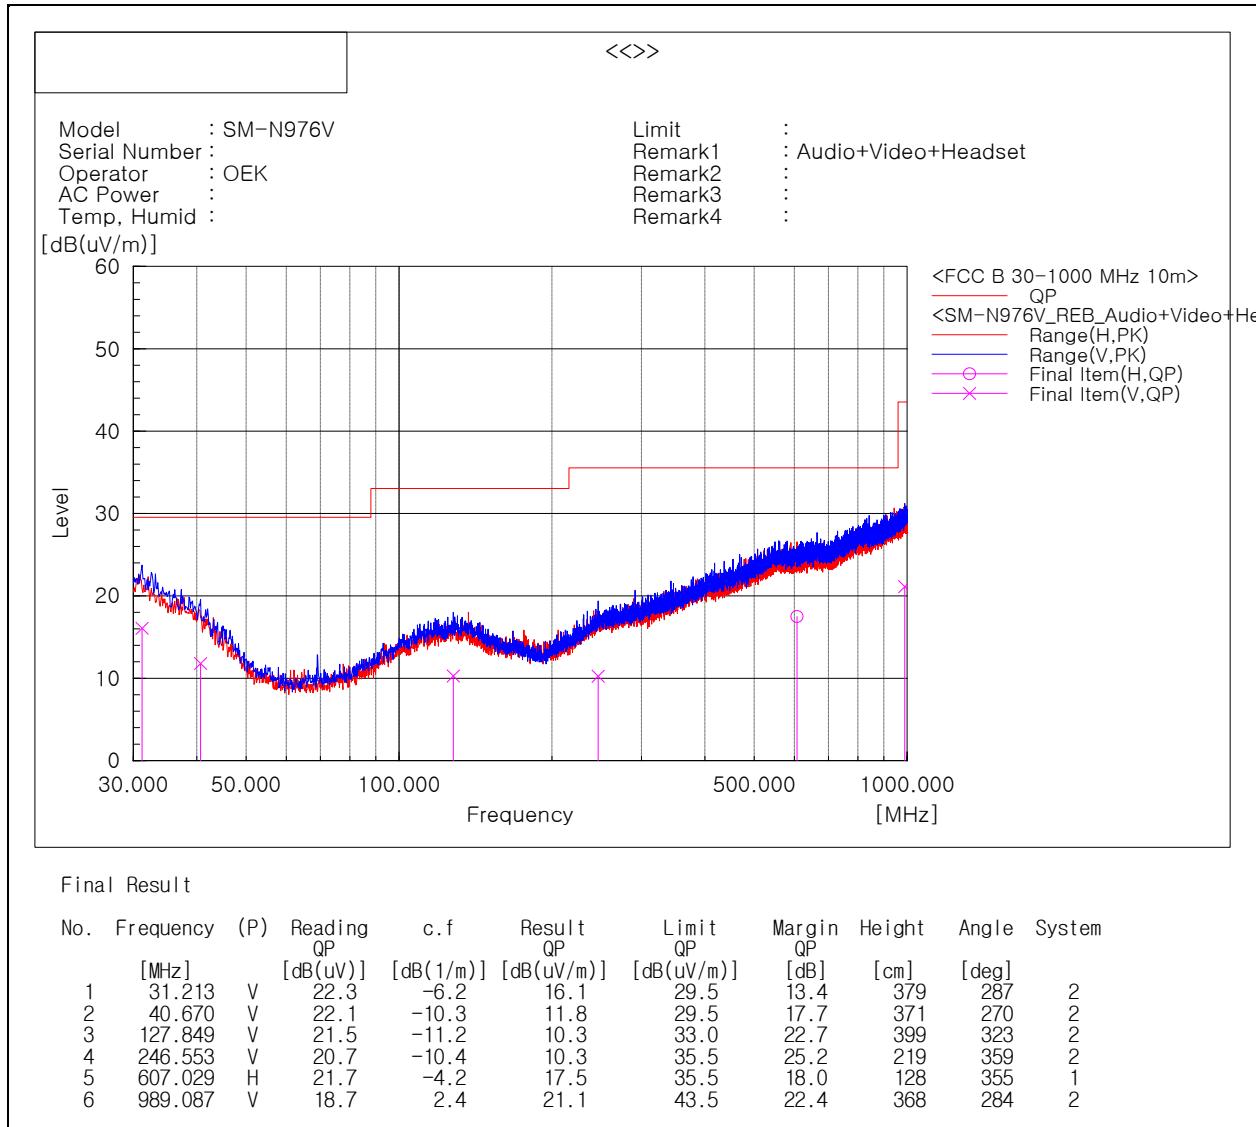


Note1) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 10 m, Antenna Height : 1 to 4 meters

Result (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit – Level (QP)

QP = Quasi-Peak, c.f = Correction Factor

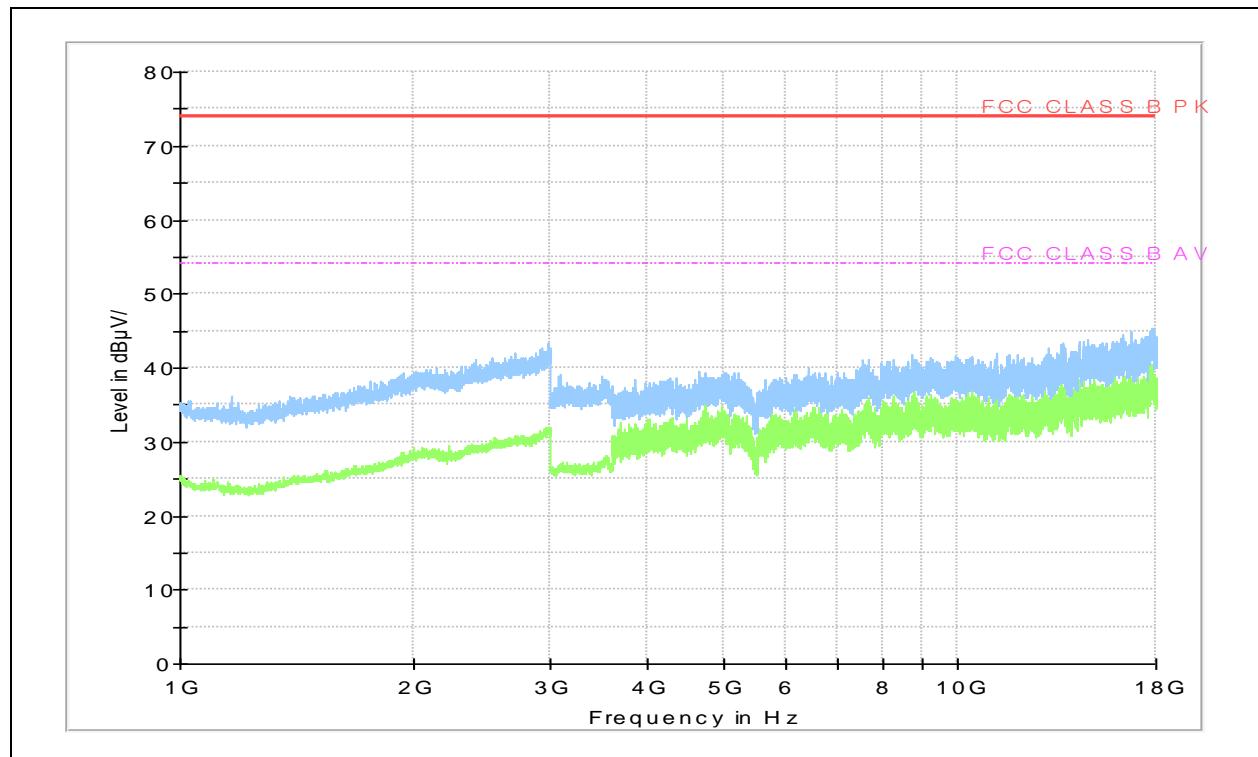- Frequencies above 1 GHz

Note 1) We have also tested from 18 GHz to 40 GHz and found no emissions

Note 2) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters


Level (PK and/or CAV) = Reading (PK and/or CAV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or CAV) = Limit – Level (PK and/or CAV)

PK = Peak, CAV = CISPR-Average, Corr. = Correction Factor

Operating Mode 4

- Frequencies below 1 GHz

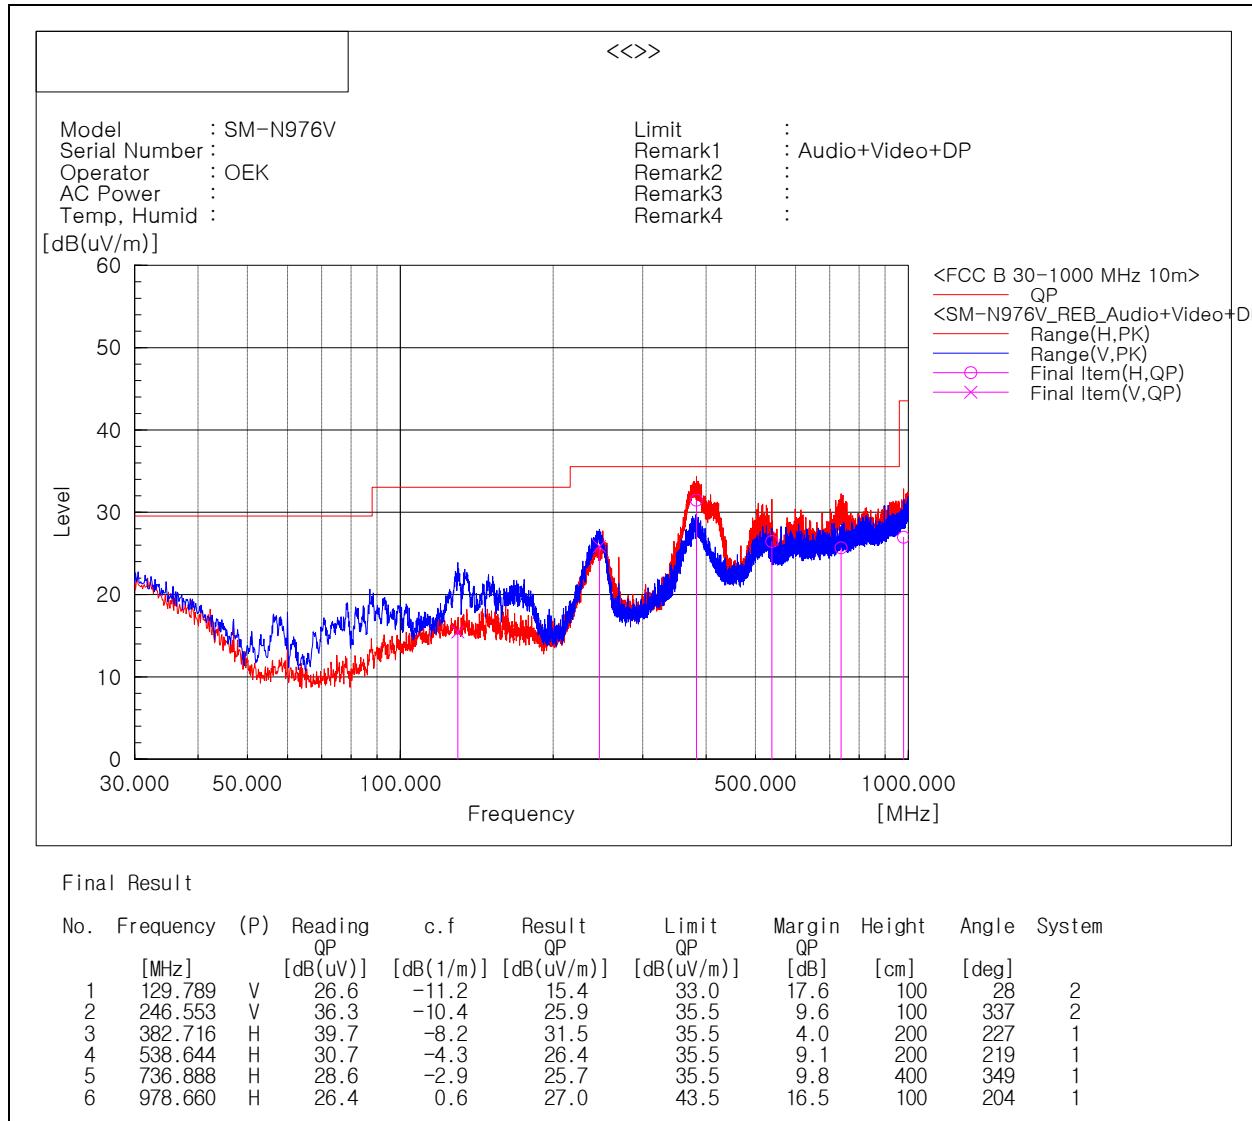

Note1) Receiving antenna polarization : Horizontal, Vertical


Test Distance : 10 m, Antenna Height : 1 to 4 meters

Result (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit – Level (QP)

QP = Quasi-Peak, c.f = Correction Factor

- Frequencies above 1 GHz

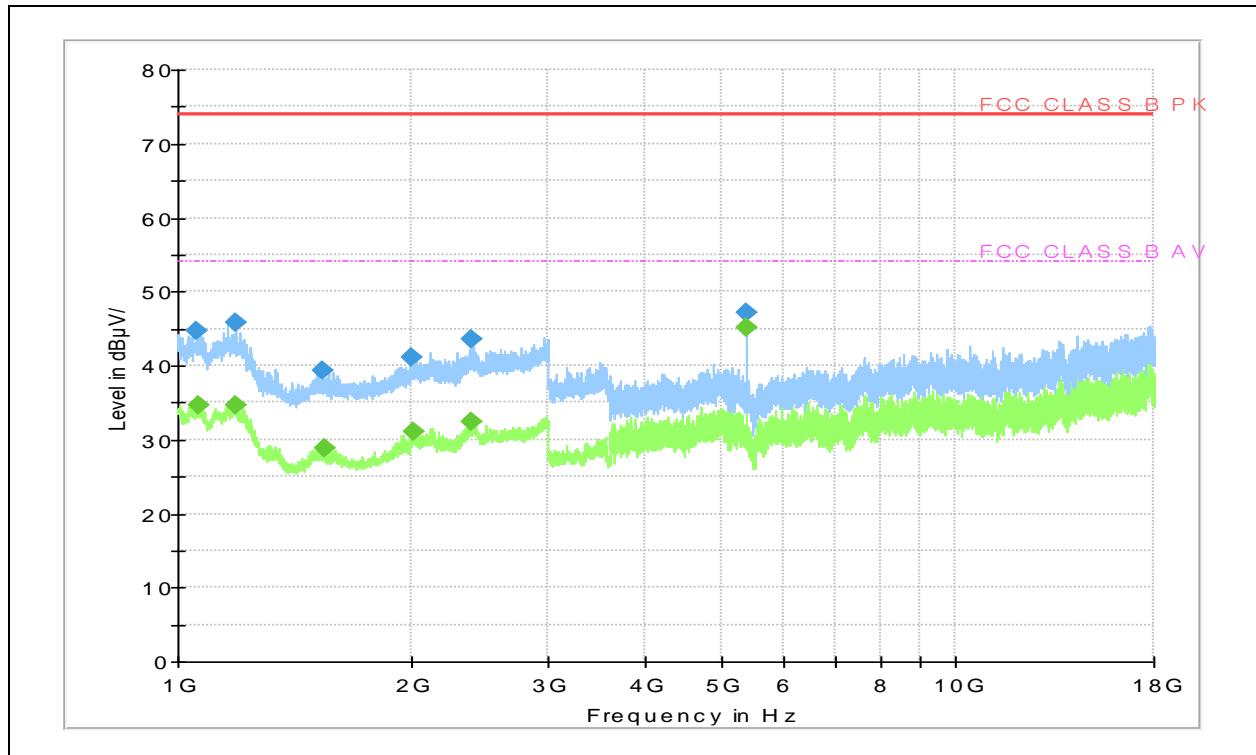

Frequency (MHz)	PK (dB μ V/m)	CAV (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1 058.000	44.8	---	74.0	29.2	151.0	H	210.0	6.1
1 062.500	---	34.7	54.0	19.3	108.0	H	210.0	6.2
1 184.000	---	34.6	54.0	19.4	189.0	H	107.0	6.2
1 184.000	45.9	---	74.0	28.1	232.0	H	107.0	6.2
1 534.000	39.3	---	74.0	34.7	311.0	V	248.0	8.9
1 540.500	---	28.9	54.0	25.1	264.0	H	227.0	9.0
2 000.500	41.2	---	74.0	32.8	354.0	H	221.0	12.3
2 007.500	---	31.2	54.0	22.8	212.0	H	113.0	12.4
2 388.500	---	32.4	54.0	21.6	190.0	H	118.0	13.2
2 388.500	43.6	---	74.0	30.4	136.0	H	118.0	13.2
5 400.000	---	45.2	54.0	8.8	201.0	H	130.0	6.7
5 400.000	47.2	---	74.0	26.8	116.0	H	130.0	6.7

Note 1) We have also tested from 18 GHz to 40 GHz and found no emissions

Note 2) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters


Level (PK and/or CAV) = Reading (PK and/or CAV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or CAV) = Limit - Level (PK and/or CAV)

PK = Peak, CAV = CISPR-Average, Corr. = Correction Factor

Operating Mode 5

- Frequencies below 1 GHz

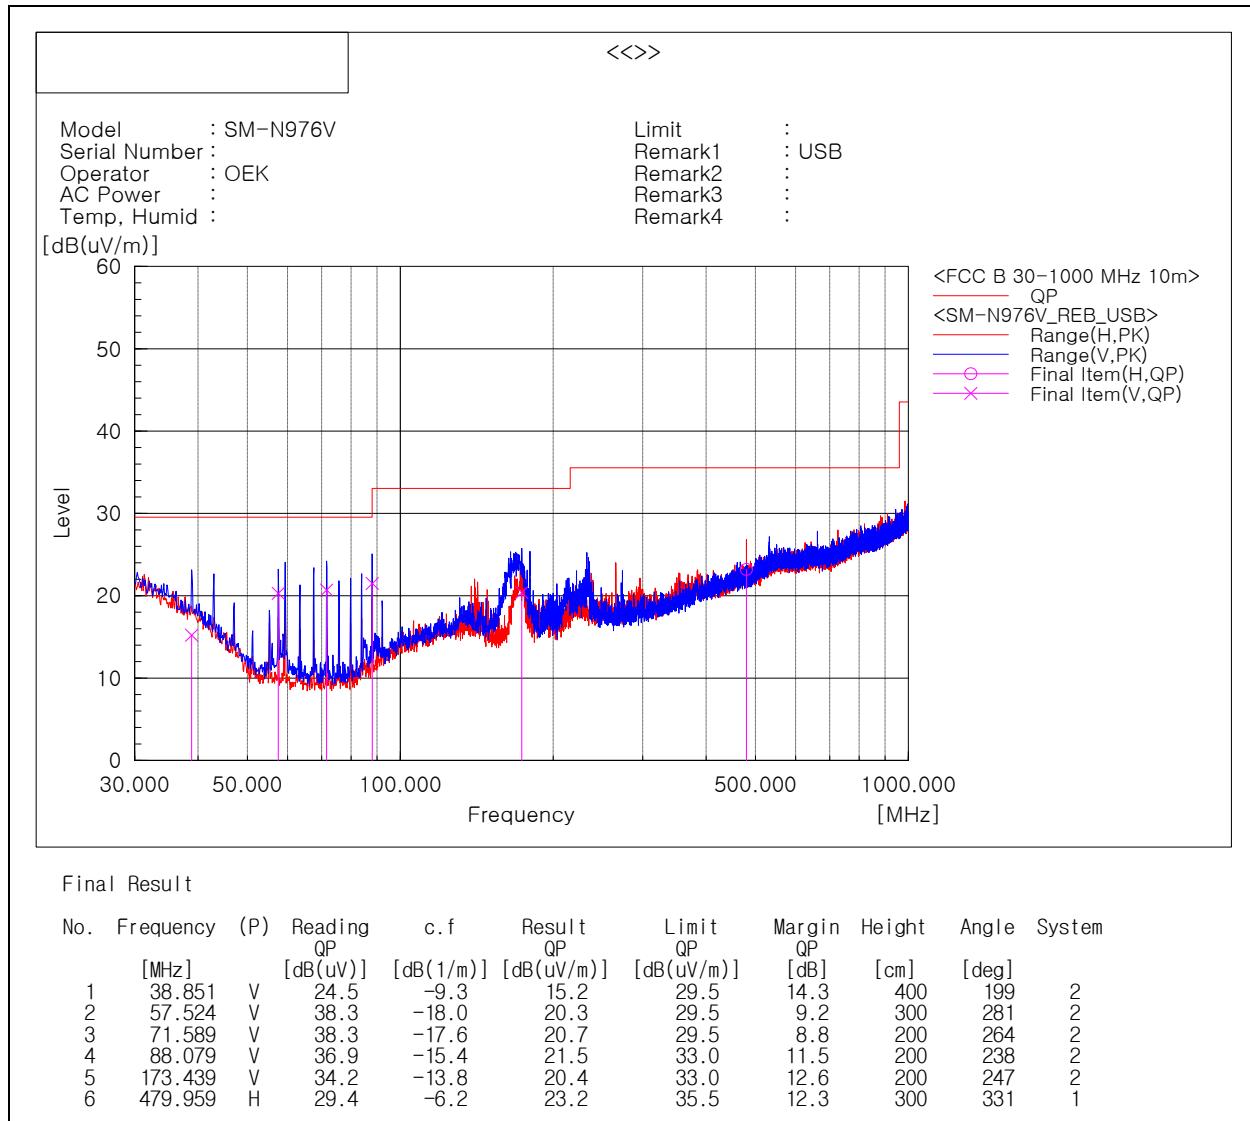

Note1) Receiving antenna polarization : Horizontal, Vertical


Test Distance : 10 m, Antenna Height : 1 to 4 meters

Result (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit – Level (QP)

QP = Quasi-Peak, c.f = Correction Factor

- Frequencies above 1 GHz

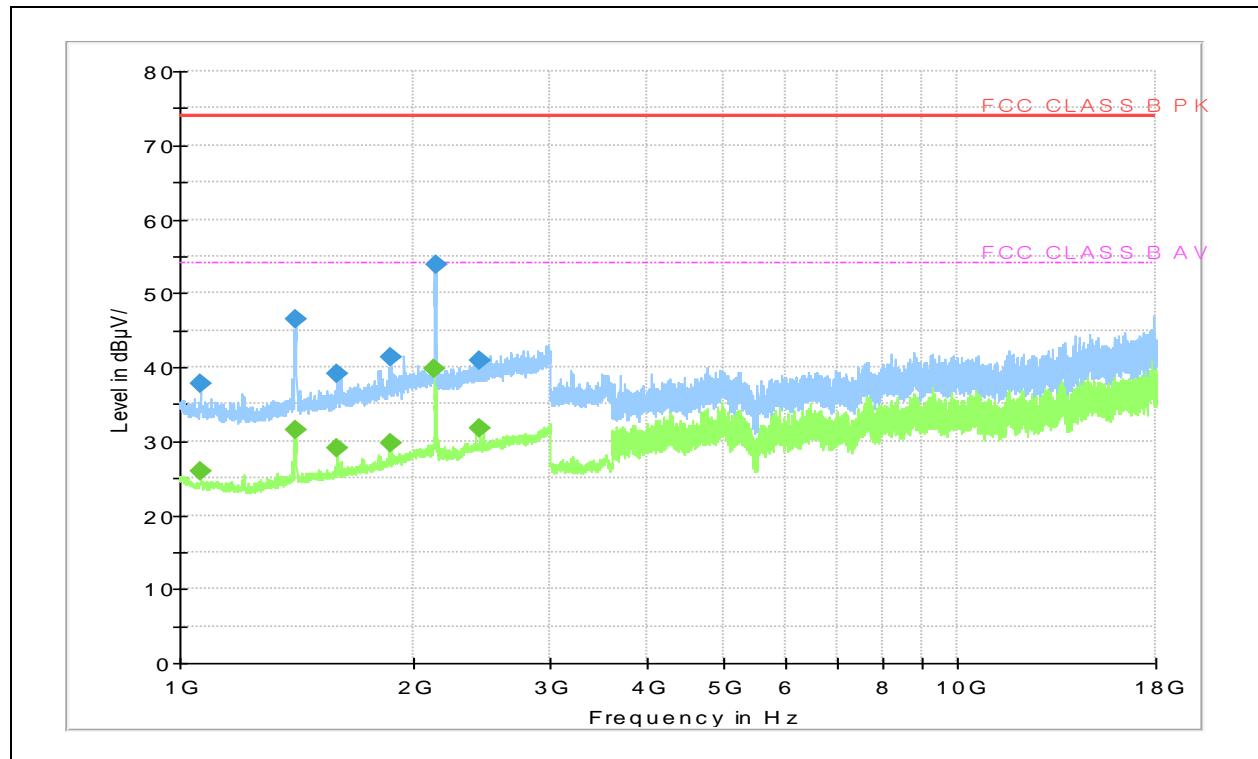

Frequency (MHz)	PK (dB μ V/m)	CAV (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1 062.000	37.9	---	74.0	36.1	122.0	H	275.0	6.2
1 064.500	---	26.0	54.0	28.0	101.0	H	275.0	6.2
1 406.500	46.4	---	74.0	27.6	232.0	H	74.0	8.0
1 411.000	---	31.5	54.0	22.5	165.0	H	74.0	8.0
1 593.000	---	29.0	54.0	25.0	254.0	V	131.0	9.3
1 595.000	39.1	---	74.0	34.9	298.0	V	148.0	9.4
1 862.500	---	29.7	54.0	24.3	121.0	V	120.0	11.1
1 864.500	41.4	---	74.0	32.6	253.0	V	166.0	11.1
2 128.000	---	39.9	54.0	14.1	354.0	V	2.0	12.4
2 133.500	53.9	---	74.0	20.1	178.0	V	2.0	12.4
2 424.000	---	31.7	54.0	22.3	165.0	H	0.0	13.4
2 424.500	40.8	---	74.0	33.2	202.0	H	292.0	13.4

Note 1) We have also tested from 18 GHz to 40 GHz and found no emissions

Note 2) Receiving antenna polarization : Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters

Level (PK and/or CAV) = Reading (PK and/or CAV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or CAV) = Limit - Level (PK and/or CAV)

PK = Peak, CAV = CISPR-Average, Corr. = Correction Factor