

## MEASUREMENT REPORT

### FCC Part 30 5G mmWave

**Applicant Name:**  
Samsung Electronics Co., Ltd.  
129, Samsung-ro,  
Yeongtong-gu, Suwon-si  
Gyeonggi-do, 16677, Korea

**Date of Testing:**  
5/5/2020 – 7/08/2020  
**Test Site/Location:**  
PCTEST Lab. Columbia, MD, USA  
**Test Report Serial No.:**  
1M2005050081-06-R1.A3L


<b>FCC ID:</b>	<b>A3LSMN981U</b>
<b>APPLICANT:</b>	<b>Samsung Electronics Co., Ltd.</b>

**Application Type:** Certification  
**Model:** SM-N981U  
**Additional Models:** SM-N981U1  
**EUT Type:** Portable Handset  
**FCC Classification:** Part 30 Mobile Transmitter (5GM)  
**FCC Rule Part(s):** 30  
**Test Procedure(s):** ANSI C63.26-2015, KDB 971168 D01 v03r01,  
 KDB 842590 D01 v01r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1M2005050081-06-R1.FCC Report SNs) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez  
President




<b>FCC ID:</b> A3LSMN981U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M2005050081-06-R1.A3L	<b>Test Dates:</b> 5/5/2020-7/08/2020	<b>EUT Type:</b> Portable Handset	Page 1 of 97	

## TABLE OF CONTENTS


1.0	INTRODUCTION .....	5
1.1	Scope .....	5
1.2	PCTEST Test Location.....	5
1.3	Test Facility / Accreditations.....	5
2.0	PRODUCT INFORMATION.....	6
2.1	Equipment Description .....	6
2.2	Device Capabilities.....	6
2.3	Test Configuration .....	6
2.4	EMI Suppression Device(s)/Modifications .....	6
3.0	DESCRIPTION OF TESTS .....	7
3.1	Measurement Procedure.....	7
3.2	Radiated Power and Radiated Spurious Emissions .....	7
4.0	MEASUREMENT UNCERTAINTY .....	9
5.0	TEST EQUIPMENT CALIBRATION DATA .....	10
6.0	SAMPLE CALCULATIONS .....	11
7.0	TEST RESULTS.....	12
7.1	Summary .....	12
7.2	Occupied Bandwidth .....	13
7.3	Equivalent Isotropic Radiated Power.....	32
7.4	Radiated Spurious and Harmonic Emissions .....	40
7.5	Band Edge Emissions .....	72
7.6	Frequency Stability / Temperature Variation .....	90
8.0	CONCLUSION.....	95
9.0	APPENDIX A .....	96
9.1	VDI Mixer Verification Certificate.....	96

<b>FCC ID:</b> A3LSMN981U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M2005050081-06-R1.A3L	<b>Test Dates:</b> 5/5/2020-7/08/2020	<b>EUT Type:</b> Portable Handset	Page 2 of 97	



# MEASUREMENT REPORT

## FCC Part 30



Antenna	Mode	Bandwidth (MHz)	CCs Active	Band	Tx Frequency (MHz)	EIRP		Emission Designator	Modulation
						Max. Power (W)	Max. Power (dBm)		
Ant1	SISO	50	1	n261	27500 - 28350	0.630	27.99	45M5G7D	QPSK
Ant1	SISO	50	1	n261	27500 - 28350	0.577	27.61	45M8G7D	pi/2-BPSK
Ant1	SISO	50	1	n261	27500 - 28350	0.406	26.09	46M2W7D	16QAM
Ant1	SISO	50	1	n261	27500 - 28350	0.208	23.18	45M5W7D	64QAM
Ant1	MIMO	50	1	n261	27500 - 28350	0.432	26.35	45M5G7D	QPSK
Ant1	SISO	50	2	n261	27500 - 28350	0.257	24.10	95M4G7D	QPSK
Ant1	SISO	50	2	n261	27500 - 28350	0.225	23.53	95M0G7D	pi/2-BPSK
Ant1	SISO	50	2	n261	27500 - 28350	0.153	21.85	95M6W7D	16QAM
Ant1	SISO	50	2	n261	27500 - 28350	0.094	19.73	95M9W7D	64QAM
Ant1	SISO	100	1	n261	27500 - 28350	0.611	27.86	91M1G7D	QPSK
Ant1	SISO	100	1	n261	27500 - 28350	0.472	26.74	91M3G7D	pi/2-BPSK
Ant1	SISO	100	1	n261	27500 - 28350	0.294	24.69	91M1W7D	16QAM
Ant1	SISO	100	1	n261	27500 - 28350	0.157	21.97	90M9W7D	64QAM
Ant1	MIMO	100	1	n261	27500 - 28350	0.321	25.07	91M1G7D	QPSK
Ant1	SISO	100	2	n261	27500 - 28350	0.227	23.56	192MG7D	QPSK
Ant1	SISO	100	2	n261	27500 - 28350	0.219	23.40	190MG7D	pi/2-BPSK
Ant1	SISO	100	2	n261	27500 - 28350	0.083	19.19	193MW7D	16QAM
Ant1	SISO	100	2	n261	27500 - 28350	0.051	17.08	195MW7D	64QAM

### EUT Overview (K Patch / Ant1 - Band n261)

Antenna	Mode	Bandwidth (MHz)	CCs Active	Band	Tx Frequency (MHz)	EIRP		Emission Designator	Modulation
						Max. Power (W)	Max. Power (dBm)		
Ant2	SISO	50	1	n261	27500 - 28350	0.561	27.49	-	QPSK
Ant2	SISO	50	1	n261	27500 - 28350	0.537	27.30	-	pi/2-BPSK
Ant2	SISO	50	1	n261	27500 - 28350	0.330	25.19	-	16QAM
Ant2	SISO	50	1	n261	27500 - 28350	0.213	23.29	-	64QAM
Ant2	MIMO	50	1	n261	27500 - 28350	0.288	24.60	-	QPSK
Ant2	SISO	50	2	n261	27500 - 28350	0.335	25.25	-	QPSK
Ant2	SISO	50	2	n261	27500 - 28350	0.279	24.46	-	pi/2-BPSK
Ant2	SISO	50	2	n261	27500 - 28350	0.199	22.98	-	16QAM
Ant2	SISO	50	2	n261	27500 - 28350	0.116	20.66	-	64QAM
Ant2	SISO	100	1	n261	27500 - 28350	0.522	27.18	-	QPSK
Ant2	SISO	100	1	n261	27500 - 28350	0.475	26.77	-	pi/2-BPSK
Ant2	SISO	100	1	n261	27500 - 28350	0.372	25.71	-	16QAM
Ant2	SISO	100	1	n261	27500 - 28350	0.254	24.04	-	64QAM
Ant2	MIMO	100	1	n261	27500 - 28350	0.202	23.06	-	QPSK
Ant2	SISO	100	2	n261	27500 - 28350	0.377	25.76	-	QPSK
Ant2	SISO	100	2	n261	27500 - 28350	0.366	25.64	-	pi/2-BPSK
Ant2	SISO	100	2	n261	27500 - 28350	0.268	24.28	-	16QAM
Ant2	SISO	100	2	n261	27500 - 28350	0.161	22.07	-	64QAM

### EUT Overview (L Patch / Ant2 - Band n261)

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 3 of 97

Antenna	Mode	Bandwidth (MHz)	CCs Active	Band	Tx Frequency (MHz)	EIRP		Emission Designator	Modulation
						Max. Power (W)	Max. Power (dBm)		
Ant1	SISO	50	1	n260	37000 - 40000	0.575	27.60	45M9G7D	QPSK
Ant1	SISO	50	1	n260	37000 - 40000	0.561	27.49	45M5G7D	pi/2-BPSK
Ant1	SISO	50	1	n260	37000 - 40000	0.398	26.00	46M1W7D	16QAM
Ant1	SISO	50	1	n260	37000 - 40000	0.243	23.85	50M1W7D	64QAM
Ant1	MIMO	50	1	n260	37000 - 40000	0.271	24.33	45M9G7D	QPSK
Ant1	SISO	50	2	n260	37000 - 40000	0.135	21.31	94M4G7D	QPSK
Ant1	SISO	50	2	n260	37000 - 40000	0.127	21.03	94M4G7D	pi/2-BPSK
Ant1	SISO	50	2	n260	37000 - 40000	0.111	20.46	94M5W7D	16QAM
Ant1	SISO	50	2	n260	37000 - 40000	0.085	19.30	93M0W7D	64QAM
Ant1	SISO	100	1	n260	37000 - 40000	0.359	25.55	92M8G7D	QPSK
Ant1	SISO	100	1	n260	37000 - 40000	0.303	24.82	90M3G7D	pi/2-BPSK
Ant1	SISO	100	1	n260	37000 - 40000	0.198	22.96	90M7W7D	16QAM
Ant1	SISO	100	1	n260	37000 - 40000	0.092	19.65	89M7W7D	64QAM
Ant1	MIMO	100	1	n260	37000 - 40000	0.231	23.64	92M8G7D	QPSK
Ant1	SISO	100	2	n260	37000 - 40000	0.180	22.55	190MG7D	QPSK
Ant1	SISO	100	2	n260	37000 - 40000	0.173	22.37	189MG7D	pi/2-BPSK
Ant1	SISO	100	2	n260	37000 - 40000	0.136	21.35	191MW7D	16QAM
Ant1	SISO	100	2	n260	37000 - 40000	0.098	19.90	190MW7D	64QAM

EUT Overview (K Patch / Ant1 - Band n260)

Antenna	Mode	Bandwidth (MHz)	CCs Active	Band	Tx Frequency (MHz)	EIRP		Emission Designator	Modulation
						Max. Power (W)	Max. Power (dBm)		
Ant2	SISO	50	1	n260	37000 - 40000	0.337	25.28	-	QPSK
Ant2	SISO	50	1	n260	37000 - 40000	0.313	24.95	-	pi/2-BPSK
Ant2	SISO	50	1	n260	37000 - 40000	0.205	23.12	-	16QAM
Ant2	SISO	50	1	n260	37000 - 40000	0.123	20.90	-	64QAM
Ant2	MIMO	50	1	n260	37000 - 40000	0.163	22.12	-	QPSK
Ant2	SISO	50	2	n260	37000 - 40000	0.156	21.92	-	QPSK
Ant2	SISO	50	2	n260	37000 - 40000	0.150	21.75	-	pi/2-BPSK
Ant2	SISO	50	2	n260	37000 - 40000	0.136	21.35	-	16QAM
Ant2	SISO	50	2	n260	37000 - 40000	0.105	20.20	-	64QAM
Ant2	SISO	100	1	n260	37000 - 40000	0.404	26.06	-	QPSK
Ant2	SISO	100	1	n260	37000 - 40000	0.380	25.80	-	pi/2-BPSK
Ant2	SISO	100	1	n260	37000 - 40000	0.272	24.35	-	16QAM
Ant2	SISO	100	1	n260	37000 - 40000	0.165	22.17	-	64QAM
Ant2	MIMO	100	1	n260	37000 - 40000	0.133	21.25	-	QPSK
Ant2	SISO	100	2	n260	37000 - 40000	0.115	20.62	-	QPSK
Ant2	SISO	100	2	n260	37000 - 40000	0.113	20.54	-	pi/2-BPSK
Ant2	SISO	100	2	n260	37000 - 40000	0.104	20.15	-	16QAM
Ant2	SISO	100	2	n260	37000 - 40000	0.086	19.35	-	64QAM

EUT Overview (L Patch / Ant2 - Band n260)

**Note:** Due to similar antenna performance from both patch antennas, the Occupied Bandwidth was only measured on one antenna for each band.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 4 of 97

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

### 1.3 Test Facility / Accreditations

**Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.**

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: A3LSMN981U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	 <b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M2005050081-06-R1.A3L	<b>Test Dates:</b> 5/5/2020-7/08/2020	<b>EUT Type:</b> Portable Handset	Page 5 of 97

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMN981U**. The test data contained in this report pertains only to the emissions due to the EUT's 5G mmWave function.

The EUT contains two patch antennas, referred to herein as Ant1 (L-Patch) and Ant2 (K-Patch). Each of the patch antennas is comprised of two separate antenna feeds - one for horizontal and one for vertical polarization. Only one array antenna can be active at a time.

The EUT supports up to 8CC for DL, and 2CC for UL. For each CC, the EUT supports both 50MHz bandwidth and 100MHz bandwidth. The EUT supports a subcarrier spacing (SCS) of 120kHz with two transmission schemes, CP-OFDM and DFT-s-OFDM, with pi/2-BPSK, QPSK, 16-QAM, and 64-QAM modulations. Different Beam IDs are supported, each corresponding to a different position in space for each antenna. During testing, FTM (Factory Test Mode) was used to operate the transmitter. MIMO operation was achieved by enabling two Beam IDs at the same time: one is from the list of H Beam IDs and other is from the list of V Beam IDs.

Antenna	Name
Ant1	K Patch
Ant2	L Patch

**Test Device Serial No.:** 1804M, 1798M

### 2.2 Device Capabilities

This device contains the following capabilities:

800/850/1900 CDMA/EvDO Rev0/A, 1x Advanced (BC0, BC1, BC10), 850/1900 GSM/GPRS/EDGE, 850/1700/1900, WCDMA/HSPA, Multi-band LTE, 5G NR (n5, n12, n71, n41, n66, n2/n25, n260, n261), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer

### 2.3 Test Configuration

The EUT was tested per the guidance of KDB 842590 D01 v01r01 and ANSI C63.26-2015. See Section 7.0 of this test report for a description of the radiated tests.

EIRP Simulation data for all Beam IDs was used to determine the worst case Beam ID for SISO operation and Beam ID pair for MIMO operation. These Beam ID's were used for final measurements.

All testing was performed using FTM (Factory Test Mode) software at continuous Tx operation. When implemented out in the field, the EUT will operate with a maximum uplink configuration (i.e., a maximum uplink duty cycle of 100%). The FTM software was also used for the EUT operation in the EN-DC mode.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 6 of 97

## 3.0 DESCRIPTION OF TESTS


### 3.1 Measurement Procedure

The measurement procedures described in the document titled "American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services" (ANSI C63.26-2015) and the guidance provided in KDB 842590 D01 v01r01 were used in the measurement of the EUT.

### 3.2 Radiated Power and Radiated Spurious Emissions §30.202, §30.203

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary for radiated emissions measurements in the spurious domain. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m for measurements above 1GHz.

Radiated power (EIRP) measurements were performed in a full anechoic chamber (FAC) conforming to the site validation requirements of CISPR 16-1-4. Radiated spurious emission measurements from 30MHz - 18GHz were performed in a semi anechoic chamber (SAC) conforming to the site validation requirements of CISPR 16-1-4. A positioner was used to manipulate the EUT through several positions in space by rotating about the roll axis as shown in the figure below. The positioner was mounted on top of a turntable bringing the total EUT height to 1.5m.

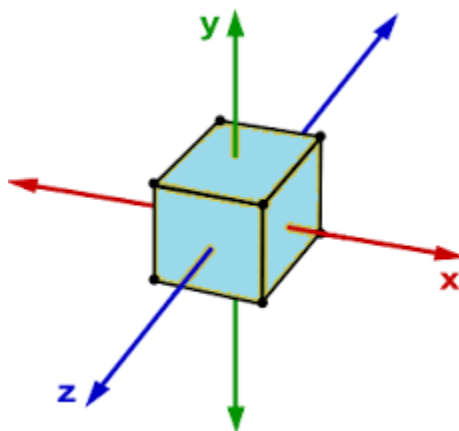

**Figure 3-1. Rotation of the EUT Through Three Orthogonal Planes**

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset	Page 7 of 97	

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable. The measurement antenna is in the far field of the EUT per formula  $2D^2/\lambda$  where D is the larger between the dimension of the measurement antenna and the transmitting antenna of the EUT. In this case, "D" is the largest dimension of the measurement antenna. The EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

Frequency Range (GHz)	Wavelength(cm)	Far Field Distance (m)	Measurement Distance (m)
18-40	0.749	0.54	1.00
40-60	0.500	1.39	1.50
60-90	0.333	0.91	1.00
90-140	0.214	0.58	1.00
140-200	0.150	0.39	1.00

**Table 3-1. Far-Field Distance & Measurement Distance per Frequency Range**

Radiated power levels are investigated while the receive antenna was rotated through all angles to determine the worst case polarization/positioning. It was determined that H=0 degree and V=90 degree are the worst case positions when the EUT was transmitting horizontally and vertically polarized beams, respectively.

The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration bandwidth set to the emissions' occupied bandwidth. The EIRP is calculated from the raw power level measured with the spectrum analyzer using the formulas shown below.

### Effective Isotropic Radiated Power Sample Calculation

The measured e.i.r.p is converted to E-field in V/m. Then, the distance correction is applied before converting back to calculated e.i.r.p, as explained in KDB 971168 D01.

$$\begin{aligned} \text{Field Strength [dB}\mu\text{V/m]} &= \text{Measured Value [dBm]} + \text{AFCL [dB/m]} + 107 \\ &= -32.74 \text{ dBm} + (40.7\text{dB/m} + 8.78\text{dB}) + 107 = 123.74\text{dB}\mu\text{V/m} \\ &= 10^{(123.74/20)}/1000000 = 1.54 \text{ V/m} \end{aligned}$$

$$\begin{aligned} \text{e.i.r.p. [dBm]} &= 10 * \log((\text{E-Field} * D_m)^2/30) + 30\text{dB} \\ &= 10 * \log((1.54\text{V/m} * 1.00\text{m})^2/30) + 30\text{dB} \\ &= 18.98 \text{ dBm e.i.r.p.} \end{aligned}$$

FCC ID: A3LSMN981U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset	Page 8 of 97	



## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 9 of 97

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to an accredited ISO/IEC 17025 calibration facility. Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	N9030A	PXA Signal Analyzer (44GHz)	6/12/2019	Annual	8/12/2020	MY52350166
Anritsu	MS46322A	Vector Network Analyzer	8/19/2019	Annual	8/19/2020	1521001
Anritsu	36585K-2F	Precision Autocal 2-Port	7/16/2019	Annual	7/16/2020	1628014
EMCO	3160-10	Small Horn (26.5 - 40GHz)	8/9/2018	Biennial	8/9/2020	130993
Espec	ESX-2CA	Environmental Chamber	6/13/2019	Annual	8/13/2020	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	2/14/2019	Biennial	2/14/2021	125518
ETS-Lindgren	3116C	DRG Horn Antenna	3/11/2019	Biennial	3/11/2021	218893
OML Inc.	M19RH	WR-19 Horn Antenna, 24dBi, 40 to 60 GHz	7/30/2018	Biennial	7/30/2020	18073001
OML Inc.	M12RH	WR-12 Horn Antenna, 24dBi, 60 to 90 GHz	7/30/2018	Biennial	7/30/2020	18073001
OML Inc.	M08RH	WR-08 Horn Antenna, 24dBi, 90 to 140 GHz	7/30/2018	Biennial	7/30/2020	18073001
OML Inc.	M05RH	WR-05 Horn Antenna, 24dBi, 140 to 220 GHz	7/30/2018	Biennial	7/30/2020	18073001
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	11/1/2019	Annual	11/1/2020	100040
Rohde & Schwarz	TS-PR40	26.5-40 GHz Pre-Amplifier	11/1/2019	Annual	11/1/2020	100037
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	5/6/2019	Annual	7/6/2020	103200
Rohde & Schwarz	180-442-KF	Horn (Small)	8/21/2018	Biennial	8/21/2020	U157403-01
Sunol	DRH-118	Horn Antenna (1-18GHz)	10/3/2019	Biennial	10/3/2021	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	5/19/2018	Biennial	7/19/2020	A051107
Virginia Diodes Inc	SAX253	SAX Module (90 - 140GHz)	9/30/2019	Annual	9/30/2020	SAX253
Virginia Diodes Inc	SAX252	SAX Module (60 - 90GHz)	9/30/2019	Annual	9/30/2020	SAX252
Virginia Diodes Inc	SAX254	SAX Module (140 - 220GHz)	9/30/2019	Annual	9/30/2020	SAX254
Virginia Diodes Inc	SAX411	SAX Module (40 - 60GHz)	10/2/2019	Annual	10/2/2020	SAX411

**Table 5-1. Test Equipment**

### Notes:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMN981U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 10 of 97

## 6.0 SAMPLE CALCULATIONS

### Emission Designator

#### QPSK Modulation

**Emission Designator = 800MG7D**

BW = 800 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

#### QAM Modulation

**Emission Designator = 802MW7D**

BW = 802 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

FCC ID: A3LSMN981U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	 <b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M2005050081-06-R1.A3L	<b>Test Dates:</b> 5/5/2020-7/08/2020	<b>EUT Type:</b> Portable Handset	Page 11 of 97

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: Samsung Electronics Co., Ltd.  
 FCC ID: A3LSMN981U  
 FCC Classification: Part 30 Mobile Transmitter (5GM)  
 Mode(s): TDD

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	N/A	RADIATED	PASS	Section 7.2
2.1046, 30.202	Equivalent Isotropic Radiated Power	43dBm		PASS	Section 7.3
2.1051, 30.203	Spurious Emissions	-13dBm/MHz for all out-of-band emissions		PASS	Section 7.4
2.1051, 30.203	Out-of-Band Emissions at the Band Edge	-13dBm/MHz for all out-of-band emissions, -5dBm/MHz from the band edge up to 10% of the channel BW		PASS	Section 7.5
2.1055	Frequency Stability	Fundamental emissions stay within authorized frequency block		PASS	Section 7.6

**Table 7-1. Summary of Radiated Test Results**

#### Notes:

- 1) All modes of operation and modulations were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) Per 2.1057(a)(2), spurious emissions were investigated up to 100GHz for n261 and up to 200GHz for n260.
- 3) The radiated RF output power and all out-of-band emissions in the spurious domain are evaluated to the EIRP limits.
- 4) "CC" refers to "Component Carriers".
- 5) Beam IDs were chosen based on which Beam ID produces the highest EIRP during EIRP simulation.
- 6) All testing was performed using FTM (Factory Test Mode) software at continuous Tx operation (100% duty cycle).
- 7) The CP-OFDM and DFT-s-OFDM transmission schemes were investigated fully for each test type and only the worst case data is included.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset	Page 12 of 97	

## 7.2 Occupied Bandwidth

### §2.1049

#### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Procedure Used

ANSI C63.26-2015 Section 5.4.3  
KDB 842590 D01 v01r01 Section 4.3

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

#### Test Notes

1. The EUT supports CP-OFDM and DFT-s-OFDM. OBW was measured for both waveforms and the worst case has been included in the report.
2. Due to similar antenna performance from both patch antennas, the Occupied Bandwidth was only measured on one antenna for each band.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 13 of 97

## Band n261

Channel	Bandwidth	CCs Active	Transmission Scheme	Modulation	OBW [MHz]
Mid	50	1	CP-OFDM	QPSK	45.50
			DFT-s-OFDM	pi/2-BPSK	45.78
			CP-OFDM	16QAM	45.51
			CP-OFDM	64QAM	45.52
		2	CP-OFDM	QPSK	95.40
			DFT-s-OFDM	pi/2-BPSK	95.01
			CP-OFDM	16QAM	95.55
			CP-OFDM	64QAM	95.91
	100	1	CP-OFDM	QPSK	91.09
			DFT-s-OFDM	pi/2-BPSK	91.30
			CP-OFDM	16QAM	91.12
			CP-OFDM	64QAM	90.90
2		CP-OFDM	QPSK	191.96	
		DFT-s-OFDM	pi/2-BPSK	190.26	
		CP-OFDM	16QAM	193.18	
		CP-OFDM	64QAM	195.00	

**Table 7-2. Summary of Ant 1 Occupied Bandwidths (n261 K Patch)**

FCC ID: A3LSMN981U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M2005050081-06-R1.A3L	<b>Test Dates:</b> 5/5/2020-7/08/2020	<b>EUT Type:</b> Portable Handset	Page 14 of 97	


ACLRRResults



16:35:33 02.06.2020

Plot 7-1. Ant 1 Occupied Bandwidth Plot (50MHz-1CC – QPSK – Mid Channel)

ACLRRResults

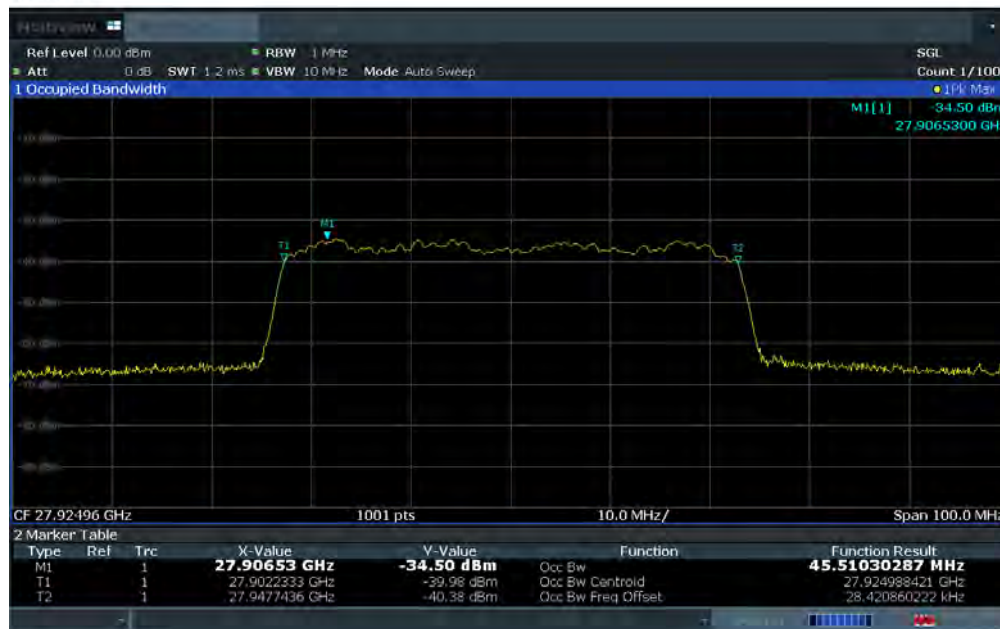

16:37:10 02.06.2020

Plot 7-2. Ant 1 Occupied Bandwidth Plot (50MHz-1CC – 16QAM – Mid Channel)

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 15 of 97

ACLRRResults



16:37:30 02.06.2020

Plot 7-3. Ant 1 Occupied Bandwidth Plot (50MHz-1CC – 64QAM – Mid Channel)

ACLRRResults



02:15:07 28.05.2020

Plot 7-4. Ant 1 Occupied Bandwidth Plot (50MHz-1CC – pi/2-BPSK – Mid Channel)

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 16 of 97



ACLRRResults



19:29:18 28.05.2020

Plot 7-5. Ant 1 Occupied Bandwidth Plot (50MHz-2CC – QPSK – Mid Channel)

ACLRRResults



19:29:42 28.05.2020

Plot 7-6. Ant 1 Occupied Bandwidth Plot (50MHz-2CC – 16QAM – Mid Channel)

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 17 of 97

ACLRRResults



19:30:27 28.05.2020

Plot 7-7. Ant 1 Occupied Bandwidth Plot (50MHz-2CC – 64QAM – Mid Channel)

ACLRRResults



19:31:03 28.05.2020

Plot 7-8. Ant 1 Occupied Bandwidth Plot (50MHz-2CC – pi/2-BPSK – Mid Channel)

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 18 of 97

ACLRRResults



16:33:24 02.06.2020

Plot 7-9. Ant 1 Occupied Bandwidth Plot (100MHz-1CC – QPSK – Mid Channel)

ACLRRResults



16:32:17 02.06.2020

Plot 7-10. Ant 1 Occupied Bandwidth Plot (100MHz-1CC – 16QAM – Mid Channel)

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 19 of 97

ACLRRResults



16:32:46 02.06.2020

Plot 7-11. Ant 1 Occupied Bandwidth Plot (100MHz-1CC – 64QAM – Mid Channel)

ACLRRResults



02:22:55 28.05.2020

Plot 7-12. Ant 1 Occupied Bandwidth Plot (100MHz-1CC – pi/2-BPSK – Mid Channel)

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 20 of 97

ACLRRResults



20:48:48 28.05.2020

Plot 7-13. Ant 1 Occupied Bandwidth Plot (100MHz-2CC – QPSK – Mid Channel)

ACLRRResults



20:49:17 28.05.2020

Plot 7-14. Ant 1 Occupied Bandwidth Plot (100MHz-2CC – 16QAM – Mid Channel)

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 21 of 97

ACLRRResults



20:49:51 28.05.2020

Plot 7-15. Ant 1 Occupied Bandwidth Plot (100MHz-2CC – 64QAM – Mid Channel)

ACLRRResults



20:47:25 28.05.2020

Plot 7-16. Ant 1 Occupied Bandwidth Plot (100MHz-2CC – pi/2-BPSK – Mid Channel)

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 22 of 97

## Band n260

Channel	Bandwidth	CCs Active	Transmission Scheme	Modulation	OBW [MHz]
Mid	50	1	CP-OFDM	QPSK	45.86
			DFT-s-OFDM	pi/2-BPSK	45.46
			CP-OFDM	16QAM	46.15
			CP-OFDM	64QAM	50.13
		2	CP-OFDM	QPSK	94.40
			DFT-s-OFDM	pi/2-BPSK	94.36
			CP-OFDM	16QAM	94.54
			CP-OFDM	64QAM	93.01
	100	1	CP-OFDM	QPSK	92.82
			DFT-s-OFDM	pi/2-BPSK	90.26
			CP-OFDM	16QAM	90.65
			CP-OFDM	64QAM	89.70
		2	CP-OFDM	QPSK	190.00
			DFT-s-OFDM	pi/2-BPSK	189.01
			CP-OFDM	16QAM	190.78
			CP-OFDM	64QAM	189.76

**Table 7-3. Summary of Ant 1 Occupied Bandwidths (n260)**

FCC ID: A3LSMN981U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M2005050081-06-R1.A3L	<b>Test Dates:</b> 5/5/2020-7/08/2020	<b>EUT Type:</b> Portable Handset	Page 23 of 97	


ACLRRResults



23:16:56 02.06.2020

Plot 7-17. Ant 1 Occupied Bandwidth Plot (50MHz-1CC – QPSK – Mid Channel)

ACLRRResults

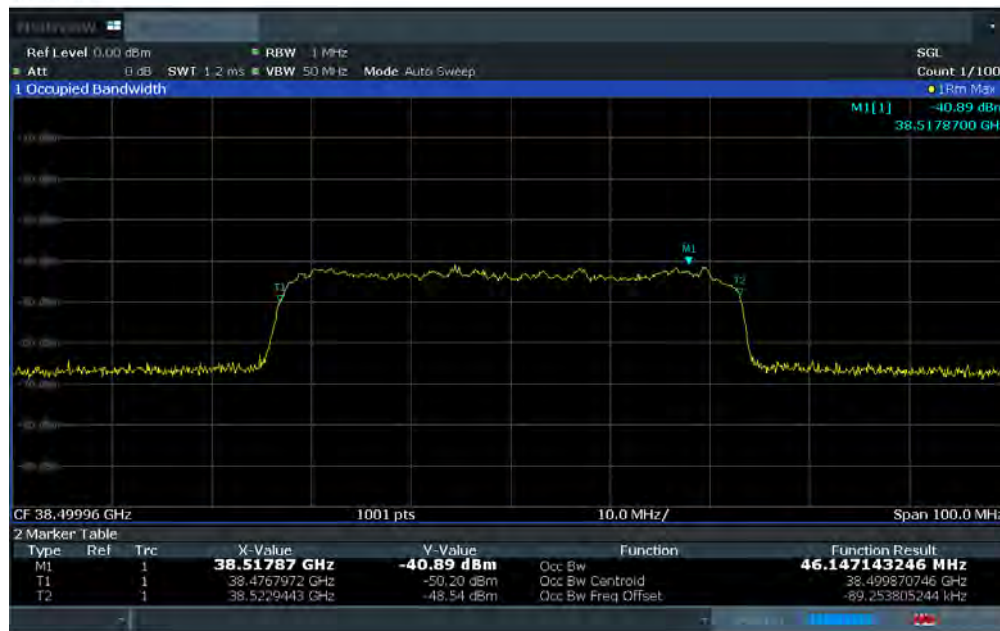

23:17:16 02.06.2020

Plot 7-18. Ant 1 Occupied Bandwidth Plot (50MHz-1CC – 16QAM – Mid Channel)

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 24 of 97



ACLRRResults



23:17:42 02.06.2020

Plot 7-19. Ant 1 Occupied Bandwidth Plot (50MHz-1CC – 64QAM – Mid Channel)


ACLRRResults




23:20:29 02.06.2020

Plot 7-20. Ant 1 Occupied Bandwidth Plot (50MHz-1CC – pi/2-BPSK – Mid Channel)

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 25 of 97

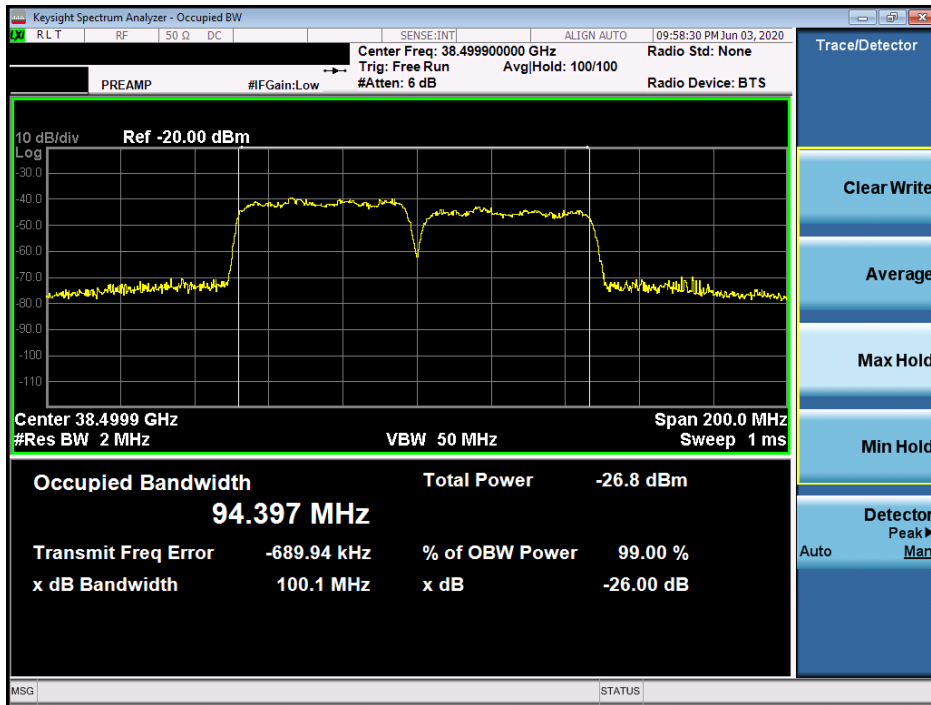


Plot 7-21. Ant 1 Occupied Bandwidth Plot (50MHz-2CC – QPSK – Mid Channel)

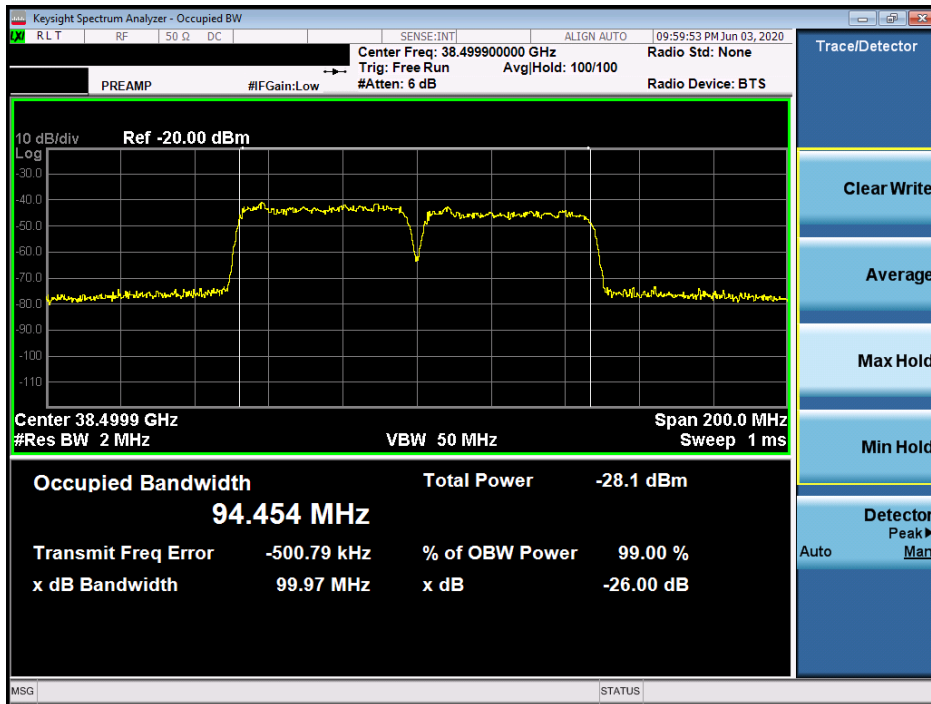


Plot 7-22. Ant 1 Occupied Bandwidth Plot (50MHz-2CC – 16QAM – Mid Channel)

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 26 of 97

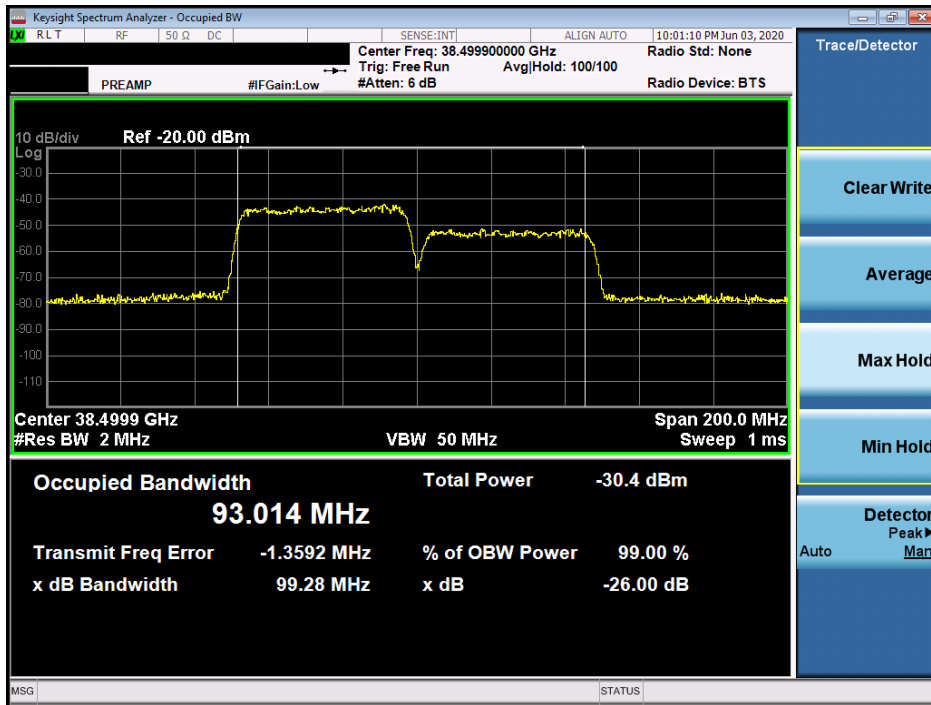


Plot 7-23. Ant 1 Occupied Bandwidth Plot (50MHz-2CC – 64QAM – Mid Channel)

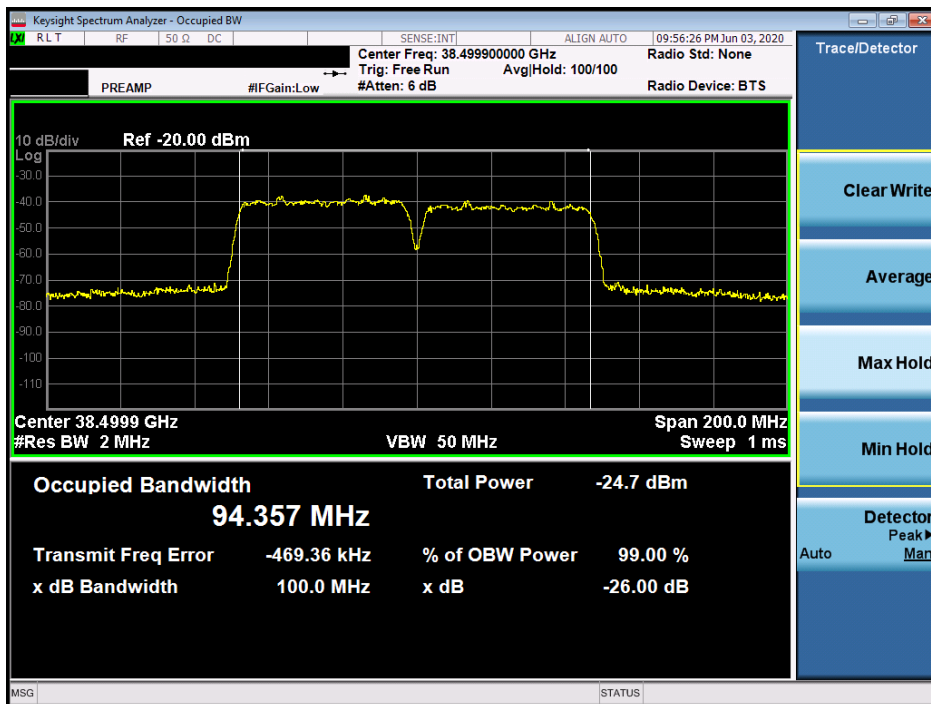


Plot 7-24. Ant 1 Occupied Bandwidth Plot (50MHz-2CC – pi/2-BPSK – Mid Channel)

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 27 of 97

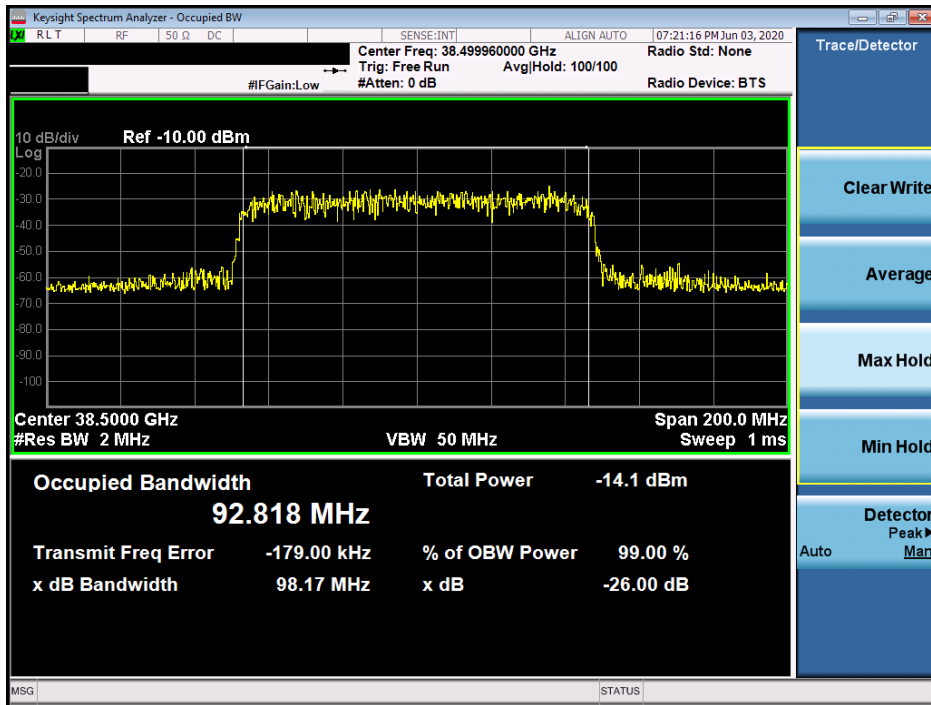


Plot 7-25. Ant 1 Occupied Bandwidth Plot (100MHz-1CC – QPSK – Mid Channel)

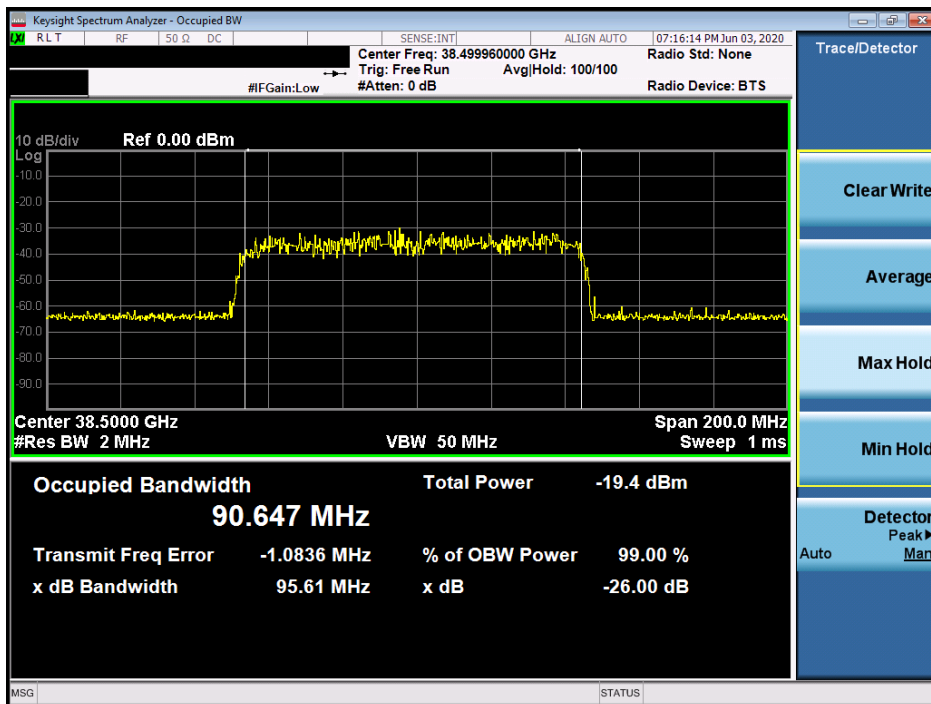


Plot 7-26. Ant 1 Occupied Bandwidth Plot (100MHz-1CC – 16QAM – Mid Channel)

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 28 of 97

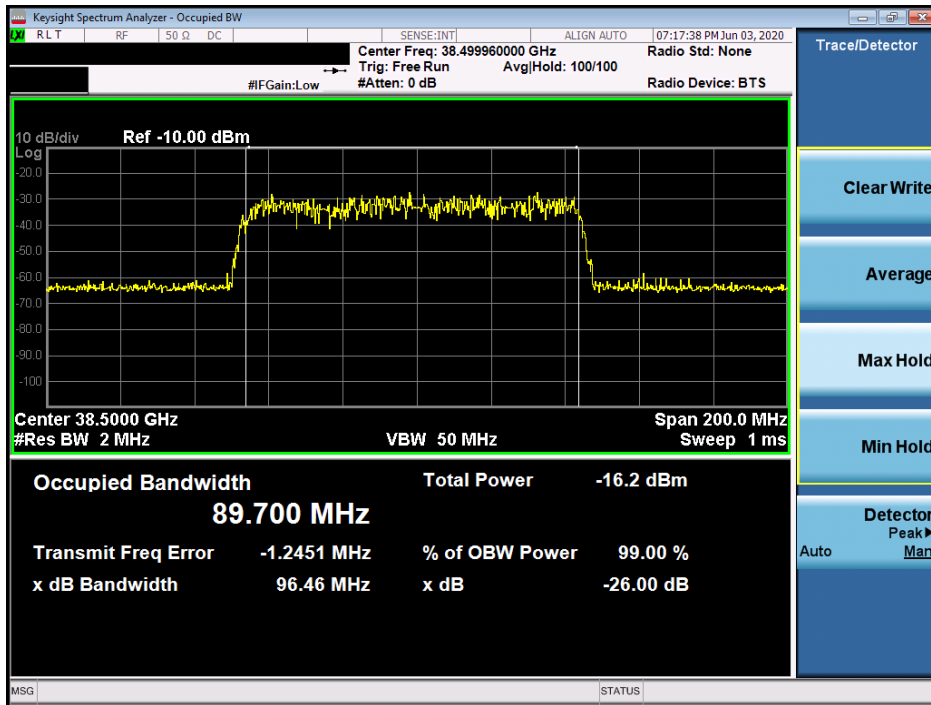


Plot 7-27. Ant 1 Occupied Bandwidth Plot (100MHz-1CC – 64QAM – Mid Channel)

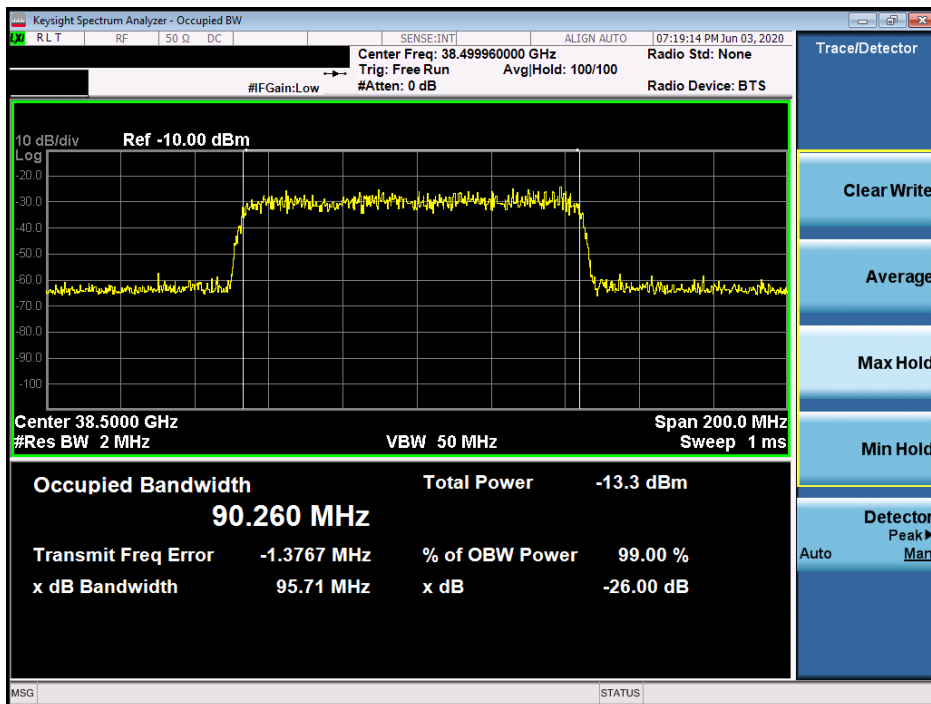


Plot 7-28. Ant 1 Occupied Bandwidth Plot (100MHz-1CC – pi/2-BPSK – Mid Channel)

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 29 of 97

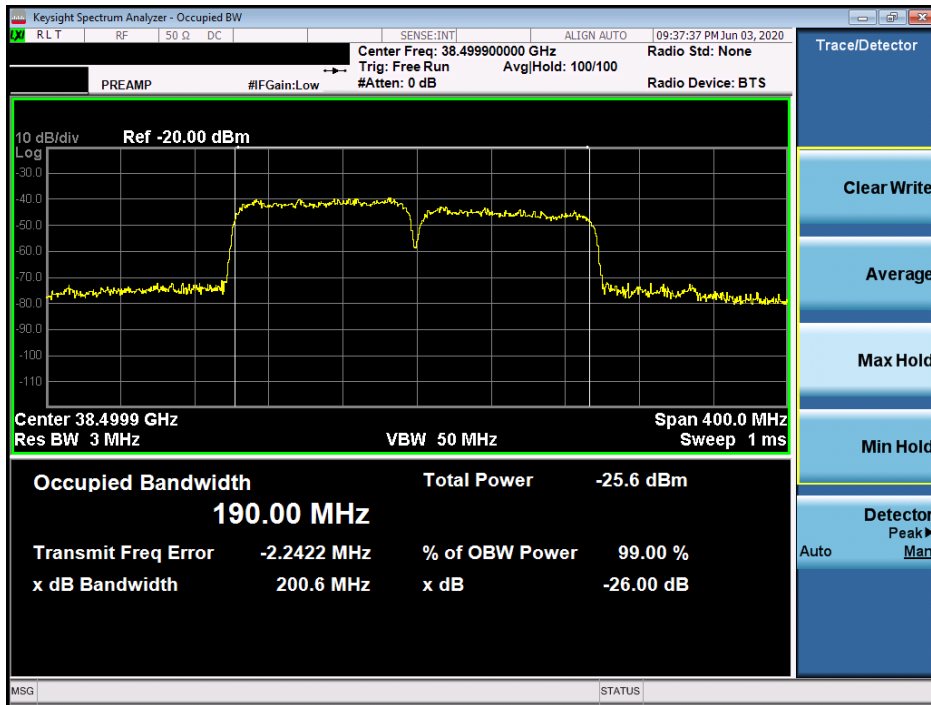


Plot 7-29. Ant 1 Occupied Bandwidth Plot (100MHz-2CC – QPSK – Mid Channel)

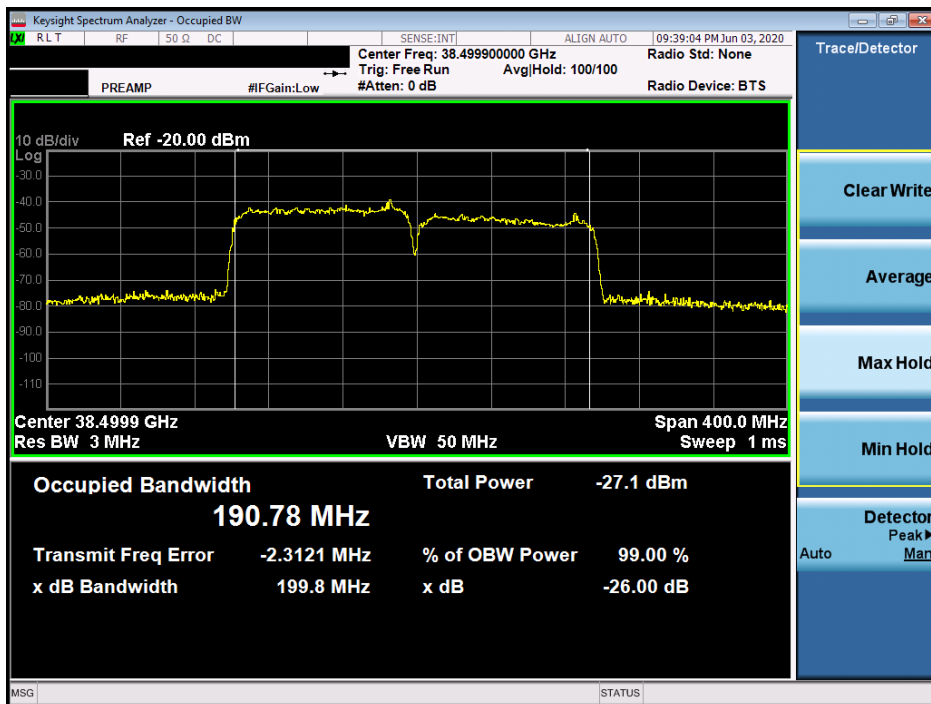


Plot 7-30. Ant 1 Occupied Bandwidth Plot (100MHz-2CC – 16QAM – Mid Channel)

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 30 of 97

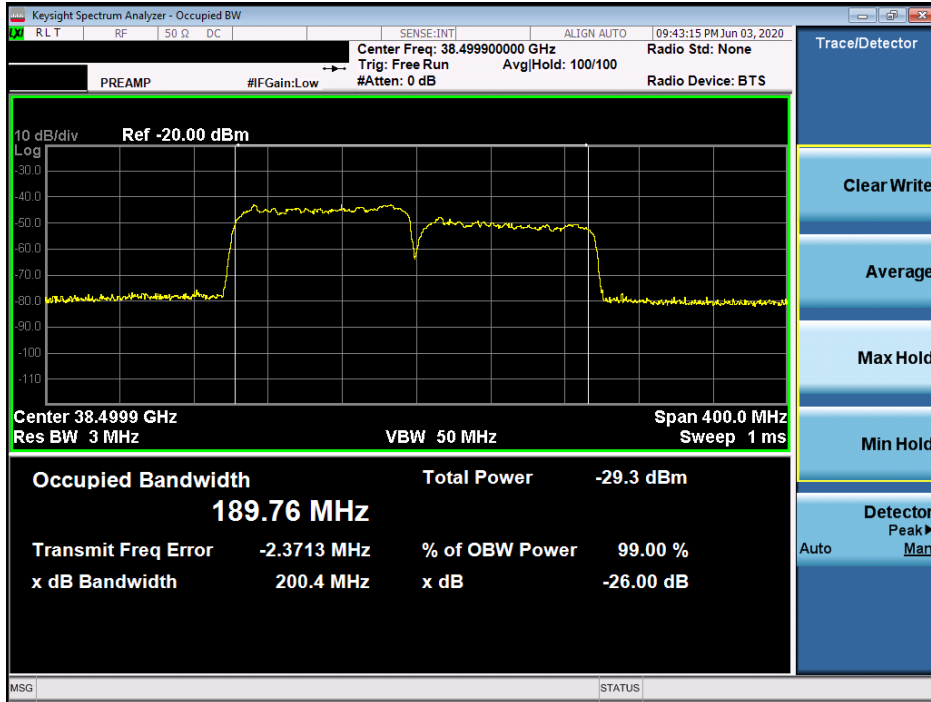

Plot 7-31. Ant 1 Occupied Bandwidth Plot (100MHz-2CC – 64QAM – Mid Channel)

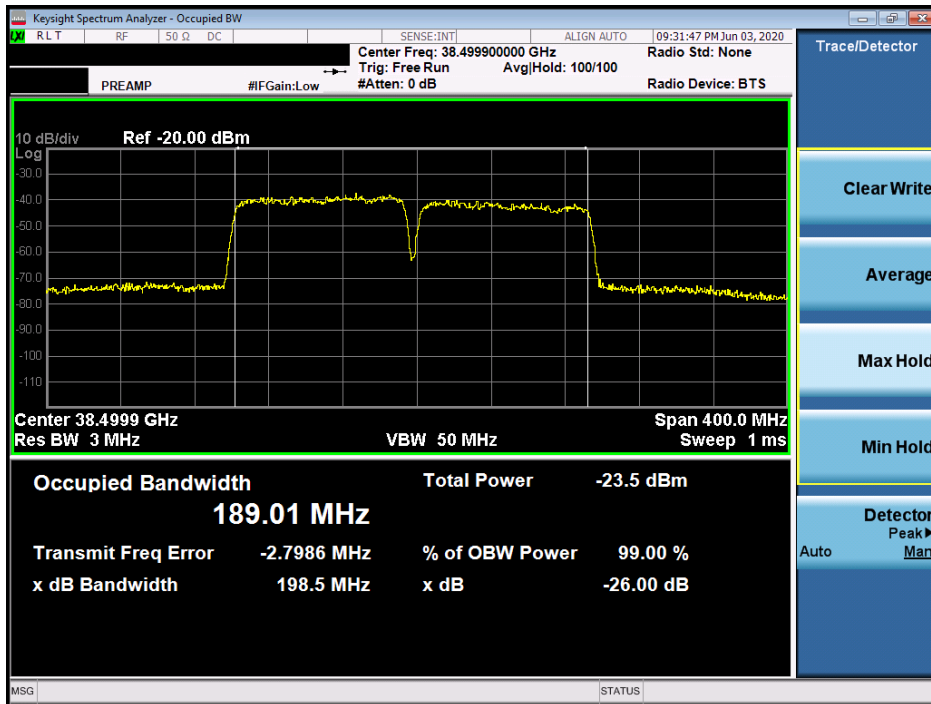

Plot 7-32. Ant 1 Occupied Bandwidth Plot (100MHz-2CC – pi/2-BPSK – Mid Channel)

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 31 of 97

### 7.3 Equivalent Isotropic Radiated Power §2.1046, §30.202

#### Test Overview

Equivalent Isotropic Radiated Power (EIRP) measurements are performed using broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

***The average power of the sum of all antenna elements is limited to a maximum EIRP of +43 dBm.***

#### Test Procedures Used

ANSI C63.26-2015 Section 5.2.4.4.1  
KDB 842590 D01 v01r01 Section 4.2

#### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq 3 \times$  RBW
4. Span = 2x to 3x the OBW
5. No. of sweep points  $\geq 2 \times$  span / RBW
6. Detector = RMS
7. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
8. Trace mode = trace averaging (RMS) over 100 sweeps
9. The trace was allowed to stabilize

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset	Page 32 of 97	



## Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below. Both H-Beam and V-Beam were investigated and the worst-case measurements were reported below.
- 2) Elements within the same antenna array are correlated to produce beamforming array gain. Antenna arrays cannot be correlated with another antenna array. During testing, only one antenna array was active.
- 3) EIRP measurements were taken at 1m test distance.
- 4) The average EIRP reported below is calculated per section 5.2.7 of ANSI C63.26-2015 which states: EIRP (dBm) = E (dB $\mu$ V/m) + 20log(D) - 104.8; where D is the measurement distance (in the far field region) in m. The field strength E is calculated E (dB $\mu$ V/m) = Spectrum Analyzer Channel Power Level (dBm) + Antenna Factor (dB/m) + Cable Loss (dB) + 107.
- 5) Radiated power levels are investigated while the receive antenna was rotated through all angles to determine the worst case polarization/positioning.
- 6) This device supports transmission of H-polarized and V-polarized beams from the antenna array in both CP-OFDM and DFT-s-OFDM transmission schemes. SISO and MIMO operation is also supported for some configurations. As part of the testing, all modes are investigated fully on the channel showing the highest simulated EIRP using QPSK modulation. The configuration that shows the highest measured EIRP was then used to determine the EIRP for the low and high channels and for the additional modulations.

FCC ID: A3LSMN981U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M2005050081-06-R1.A3L	<b>Test Dates:</b> 5/5/2020-7/08/2020	<b>EUT Type:</b> Portable Handset	Page 33 of 97	

## Band n261 Beam ID Configurations

Mode	Channel	Beam Polarization	Beam ID	Beam ID Pair
SISO	Low	H	147	-
		V	27	-
	Mid	H	147	-
		V	28	-
	High	H	147	-
		V	18	-
MIMO	Low	MIMO	155	27
	Mid	MIMO	147	18
	High	MIMO	147	18

**Table 7-4. Ant 1 Worst Case Beam ID**

Mode	Channel	Beam Polarization	Beam ID	Beam ID Pair
SISO	Low	H	142	-
		V	23	-
	Mid	H	151	-
		V	23	-
	High	H	151	-
		V	22	-
MIMO	Low	MIMO	142	14
	Mid	MIMO	151	23
	High	MIMO	141	12

**Table 7-5. Ant 2 Worst Case Beam ID**

FCC ID: A3LSMN981U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 34 of 97	

## Band n261

CCs active	Frequency [MHz]	Channel	Transmission Scheme	Modulation	Beam Pol	Ant. Div.	BeamID	Ant. Pol. [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	RB Size/Offset	EIRP [dBm]
1	27525.00	Low	DFT-s-OFDM	QPSK	H	SISO	147	H	189	42	1/16	27.33
	27924.96	Mid	DFT-s-OFDM	QPSK	H	SISO	147	H	189	43	1/16	27.93
	27924.96	Mid	DFT-s-OFDM	QPSK	V	SISO	28	H	299	248	1/16	26.36
	27924.96	Mid	CP-OFDM	QPSK	H	SISO	147	H	9	307	1/16	24.70
	27924.96	Mid	CP-OFDM	QPSK	V	SISO	28	H	299	248	1/16	23.65
	27924.96	Mid	CP-OFDM	QPSK	H + V	MIMO	147+18	V	342	323	1/16	26.35
	28324.92	High	DFT-s-OFDM	QPSK	H	SISO	147	H	193	56	1/16	27.99
	27525.00	High	DFT-s-OFDM	pi/2-BPSK	H	SISO	147	H	193	56	1/16	27.61
	27525.00	High	DFT-s-OFDM	16QAM	H	SISO	147	H	193	56	1/16	26.09
27525.00	High	DFT-s-OFDM	64QAM	H	SISO	147	H	193	56	1/16	23.18	

**Table 7-6. Ant 1 EIRP Data (Band n261 - 50MHz-1CC)**

CCs active	Frequency [MHz]	Channel	Transmission Scheme	Modulation	Beam Pol	Ant. Div.	BeamID	Ant. Pol. [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	RB Size/Offset	EIRP [dBm]
2	27924.96	Mid	DFT-s-OFDM	QPSK	V	SISO	28	H	299	251	32/0	22.87
	27924.96	Mid	DFT-s-OFDM	QPSK	H	SISO	147	H	190	43	32/0	24.10
	27924.96	Mid	DFT-s-OFDM	pi/2-BPSK	H	SISO	147	H	190	43	32/0	23.53
	27924.96	Mid	DFT-s-OFDM	16QAM	V	SISO	147	H	190	43.00	32/0	21.85
	27924.96	Mid	DFT-s-OFDM	64QAM	V	SISO	147	H	190	43.00	32/0	19.73

**Table 7-7. Ant 1 EIRP Data (Band n261 - 50MHz-2CC)**

CCs active	Frequency [MHz]	Channel	Transmission Scheme	Modulation	Beam Pol	Ant. Div.	BeamID	Ant. Pol. [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	RB Size/Offset	EIRP [dBm]
1	27550.08	Low	DFT-s-OFDM	QPSK	H	SISO	147	H	189	41	1/32	27.86
	27924.96	Mid	DFT-s-OFDM	QPSK	H	SISO	147	H	193	43	1/32	27.12
	27924.96	Mid	DFT-s-OFDM	QPSK	V	SISO	28	H	300	253	1/32	26.24
	27924.96	Mid	CP-OFDM	QPSK	H	SISO	147	H	193	43	1/32	23.87
	27924.96	Mid	CP-OFDM	QPSK	V	SISO	28	H	300	253	1/32	24.25
	27924.96	Mid	CP-OFDM	QPSK	H + V	MIMO	147+18	V	342	324	1/32	25.07
	28299.96	High	DFT-s-OFDM	QPSK	H	SISO	147	H	193	54	1/32	27.48
	27550.08	Low	DFT-s-OFDM	pi/2-BPSK	H	SISO	147	H	189	41	1/32	26.74
	27550.08	Low	DFT-s-OFDM	16QAM	H	SISO	147	H	189	41	1/32	24.69
	27550.08	Low	DFT-s-OFDM	64QAM	H	SISO	147	H	189	41	1/32	21.97

**Table 7-8. Ant 1 EIRP Data (Band n261 - 100MHz-1CC)**

CCs active	Frequency [MHz]	Channel	Transmission Scheme	Modulation	Beam Pol	Ant. Div.	BeamID	Ant. Pol. [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	RB Size/Offset	EIRP [dBm]
2	27924.96	Mid	DFT-s-OFDM	QPSK	V	SISO	28	H	300	253	64/0	22.30
	27924.96	Mid	DFT-s-OFDM	QPSK	H	SISO	147	H	193	52	64/0	23.56
	27924.96	Mid	DFT-s-OFDM	pi/2-BPSK	H	SISO	147	H	193	52	64/0	23.40
	27924.96	Mid	DFT-s-OFDM	16QAM	H	SISO	147	H	193	52	64/0	19.19
	27924.96	Mid	DFT-s-OFDM	64QAM	H	SISO	147	H	193	52	64/0	17.08

**Table 7-9. Ant 1 EIRP Data (Band n261 - 100MHz-2CC)**

FCC ID: A3LSMN981U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 35 of 97	

CCs active	Frequency [MHz]	Channel	Transmission Scheme	Modulation	Beam Pol	Ant. Div.	BeamID	Ant. Pol. [H/V]	Turtable Azimuth [degrees]	Positioner Azimuth [degrees]	RB Size/Offset	EIRP [dBm]
1	27525.00	Low	DFT-s-OFDM	QPSK	H	SISO	142	V	331	67	1/16	26.96
	27924.96	Mid	DFT-s-OFDM	QPSK	H	SISO	151	V	330	66	1/16	27.26
	27924.96	Mid	DFT-s-OFDM	QPSK	V	SISO	23	H	168	314	1/16	25.06
	27924.96	Mid	CP-OFDM	QPSK	H	SISO	151	V	330	66	1/16	24.74
	27924.96	Mid	CP-OFDM	QPSK	V	SISO	23	H	168	314	1/16	22.30
	27924.96	Mid	CP-OFDM	QPSK	H + V	MIMO	151+23	V	79	22	1/16	24.6
	28324.92	High	DFT-s-OFDM	QPSK	H	SISO	151	V	332	61	1/16	27.49
	28324.92	High	DFT-s-OFDM	pi/2-BPSK	H	SISO	151	V	332	61	1/16	27.30
	28324.92	High	DFT-s-OFDM	16QAM	H	SISO	151	V	332	61	1/16	25.19
28324.92	High	DFT-s-OFDM	64QAM	H	SISO	151	V	332	61	1/16	23.29	

Table 7-10. Ant 2 EIRP Data (Band n261 - 50MHz-1CC)

CCs active	Frequency [MHz]	Channel	Transmission Scheme	Modulation	Beam Pol	Ant. Div.	BeamID	Ant. Pol. [H/V]	Turtable Azimuth [degrees]	Positioner Azimuth [degrees]	RB Size/Offset	EIRP [dBm]
2	27525.00	Low	DFT-s-OFDM	QPSK	V	SISO	23	H	339	25	32/0	20.96
	27525.00	Low	DFT-s-OFDM	QPSK	H	SISO	142	V	8	262	32/0	25.25
	27525.00	Low	DFT-s-OFDM	pi/2-BPSK	H	SISO	142	V	8	262	32/0	24.46
	27525.00	Low	DFT-s-OFDM	16QAM	H	SISO	142	V	8	262	32/0	22.98
	27525.00	Low	DFT-s-OFDM	64QAM	H	SISO	142	V	8	262	32/0	20.66

Table 7-11. Ant 2 EIRP Data (Band n261 - 50MHz-2CC)

CCs active	Frequency [MHz]	Channel	Transmission Scheme	Modulation	Beam Pol	Ant. Div.	BeamID	Ant. Pol. [H/V]	Turtable Azimuth [degrees]	Positioner Azimuth [degrees]	RB Size/Offset	EIRP [dBm]
1	27550.08	Low	DFT-s-OFDM	QPSK	H	SISO	142	V	133	182	1/32	27.18
	27924.96	Mid	DFT-s-OFDM	QPSK	H	SISO	151	V	330	66	1/32	26.70
	27924.96	Mid	DFT-s-OFDM	QPSK	V	SISO	23	H	323	172	1/32	25.27
	27924.96	Mid	CP-OFDM	QPSK	H	SISO	151	V	330	66	1/32	24.18
	27924.96	Mid	CP-OFDM	QPSK	V	SISO	23	H	323	172	1/32	22.77
	27924.96	Mid	CP-OFDM	QPSK	H + V	MIMO	151+23	V	284	198	1/32	23.06
	28324.92	High	DFT-s-OFDM	QPSK	H	SISO	151	V	132	173	1/32	26.35
	27550.08	Low	DFT-s-OFDM	pi/2-BPSK	H	SISO	142	V	133	182	1/32	26.77
	27550.08	Low	DFT-s-OFDM	16QAM	H	SISO	142	V	133	182	1/32	25.71
	27550.08	Low	DFT-s-OFDM	64QAM	H	SISO	142	V	133	182	1/32	24.04

Table 7-12. Ant 2 EIRP Data (Band n261 - 100MHz-1CC)

CCs active	Frequency [MHz]	Channel	Transmission Scheme	Modulation	Beam Pol	Ant. Div.	BeamID	Ant. Pol. [H/V]	Turtable Azimuth [degrees]	Positioner Azimuth [degrees]	RB Size/Offset	EIRP [dBm]
2	27525.00	Low	DFT-s-OFDM	QPSK	V	SISO	23	H	274	119	64/0	24.59
	27550.08	Low	DFT-s-OFDM	QPSK	H	SISO	142	V	9	259	64/0	25.76
	27525.00	Low	DFT-s-OFDM	pi/2-BPSK	H	SISO	142	V	9	259	64/0	25.64
	27550.08	Low	DFT-s-OFDM	16QAM	H	SISO	xx	V	9	259	64/0	24.28
	27550.08	Low	DFT-s-OFDM	64QAM	H	SISO	xx	V	9	259	64/0	22.07

Table 7-13. Ant 2 EIRP Data (Band n261 - 100MHz-2CC)

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 36 of 97	

## Band n260 Beam ID Configurations

Mode	Channel	Beam Polarization	Beam ID	Beam ID Pair
SISO	Low	H	146	-
		V	18	-
	Mid	H	146	-
		V	18	-
	High	H	155	-
		V	28	-
MIMO	Low	MIMO	155	18
	Mid	MIMO	155	18
	High	MIMO	146	27

**Table 7-14. Ant 1 Worst Case Beam ID**

Mode	Channel	Beam Polarization	Beam ID	Beam ID Pair
SISO	Low	H	150	-
		V	14	-
	Mid	H	141	-
		V	13	-
	High	H	141	-
		V	13	-
MIMO	Low	MIMO	150	14
	Mid	MIMO	141	23
	High	MIMO	150	14

**Table 7-15. Ant 2 Worst Case Beam ID**

FCC ID: A3LSMN981U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 37 of 97	

## Band n260

CCs active	Frequency [MHz]	Channel	Transmission Scheme	Modulation	Beam Pol	Ant. Div.	BeamID	Ant. Pol. [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	RB Size/Offset	EIRP [dBm]
1	37025.04	Low	DFT-s-OFDM	QPSK	H	SISO	146	H	96	345	1/16	25.96
	38499.96	Mid	DFT-s-OFDM	QPSK	H	SISO	146	H	186	20	1/16	27.60
	38499.96	Mid	DFT-s-OFDM	QPSK	V	SISO	18	H	81	330	1/16	26.52
	38499.96	Mid	CP-OFDM	QPSK	H	SISO	146	H	186	20	1/16	23.80
	38499.96	Mid	CP-OFDM	QPSK	V	SISO	18	H	81	330	1/16	22.91
	38499.96	Mid	CP-OFDM	QPSK	H + V	MIMO	18 + 155	H	82	347	1/16	24.33
	39975.00	High	DFT-s-OFDM	QPSK	H	SISO	155	H	79	354	1/16	26.35
	38499.96	Mid	DFT-s-OFDM	pi/2-BPSK	H	SISO	146	H	186	20	1/16	27.49
	38499.96	Mid	DFT-s-OFDM	16QAM	H	SISO	146	H	186	20	1/16	26.00
38499.96	Mid	DFT-s-OFDM	64QAM	H	SISO	146	H	186	20	1/16	23.85	

Table 7-16. Ant 1 EIRP Data (Band n260 - 50MHz-1CC)

CCs active	Frequency [MHz]	Channel	Transmission Scheme	Modulation	Beam Pol	Ant. Div.	BeamID	Ant. Pol. [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	RB Size/Offset	EIRP [dBm]
2	37025.04	Low	DFT-s-OFDM	QPSK	V	SISO	18	H	83	338	32/0	19.76
	37025.04	Low	DFT-s-OFDM	QPSK	H	SISO	146	H	182	40	32/0	21.31
	37025.04	Low	DFT-s-OFDM	pi/2-BPSK	H	SISO	146	H	182	40	32/0	21.03
	37025.04	Low	DFT-s-OFDM	16QAM	V	SISO	146	H	182	40.00	32/0	20.46
	37025.04	Low	DFT-s-OFDM	64QAM	V	SISO	146	H	182	40.00	32/0	19.30

Table 7-17. Ant 1 EIRP Data (Band n260 - 50MHz-2CC)

CCs active	Frequency [MHz]	Channel	Transmission Scheme	Modulation	Beam Pol	Ant. Div.	BeamID	Ant. Pol. [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	RB Size/Offset	EIRP [dBm]
1	37027.32	Low	DFT-s-OFDM	QPSK	H	SISO	146	H	99	326	1/32	24.84
	38497.44	Mid	DFT-s-OFDM	QPSK	H	SISO	146	H	191	33	1/32	25.55
	38497.44	Mid	DFT-s-OFDM	QPSK	V	SISO	18	H	80	326	1/32	24.80
	38497.44	Mid	CP-OFDM	QPSK	H	SISO	146	H	191	33	1/32	23.23
	38497.44	Mid	CP-OFDM	QPSK	V	SISO	18	H	80	326	1/32	22.64
	38497.44	Mid	CP-OFDM	QPSK	H + V	MIMO	18 + 155	H	82	340	1/32	23.64
	39966.24	High	DFT-s-OFDM	QPSK	H	SISO	155	H	165	34	1/32	22.52
	38497.44	Mid	DFT-s-OFDM	pi/2-BPSK	H	SISO	146	H	191	33	1/32	24.82
	38497.44	Mid	DFT-s-OFDM	16QAM	H	SISO	146	H	191	33	1/32	22.96
	38497.44	Mid	DFT-s-OFDM	64QAM	H	SISO	146	H	191	33	1/32	19.65

Table 7-18. Ant 1 EIRP Data (Band n260 - 100MHz-1CC)

CCs active	Frequency [MHz]	Channel	Transmission Scheme	Modulation	Beam Pol	Ant. Div.	BeamID	Ant. Pol. [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	RB Size/Offset	EIRP [dBm]
2	38497.44	Mid	DFT-s-OFDM	QPSK	V	SISO	18	H	92	333	66/0	21.90
	38497.44	Mid	DFT-s-OFDM	QPSK	H	SISO	146	H	183	30	66/0	22.55
	38497.44	Mid	DFT-s-OFDM	pi/2-BPSK	H	SISO	146	H	183	30	66/0	22.37
	38497.44	Mid	DFT-s-OFDM	16QAM	H	SISO	146	H	183	30	66/0	21.35
	38497.44	Mid	DFT-s-OFDM	64QAM	H	SISO	146	H	183	30	66/0	19.90

Table 7-19. Ant 1 EIRP Data (Band n260 - 100MHz-2CC)

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 38 of 97	

CCs active	Frequency [MHz]	Channel	Transmission Scheme	Modulation	Beam Pol	Ant. Div.	BeamID	Ant. Pol. [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	RB Size/Offset	EIRP [dBm]
1	37027.32	Low	DFT-s-OFDM	QPSK	H	SISO	141	V	141	73	1/16	23.83
	38497.44	Mid	DFT-s-OFDM	QPSK	H	SISO	141	V	138	76	1/16	25.28
	38497.44	Mid	DFT-s-OFDM	QPSK	V	SISO	13	H	253	37	1/16	23.99
	38497.44	Mid	CP-OFDM	QPSK	H	SISO	141	V	138	76	1/16	22.14
	38497.44	Mid	CP-OFDM	QPSK	V	SISO	13	H	253	37	1/16	21.97
	38497.44	Mid	CP-OFDM	QPSK	H	MIMO	141	H	272	37	1/16	22.12
	39966.24	High	DFT-s-OFDM	QPSK	H	SISO	141	V	137	77	1/16	24.73
	38497.44	Mid	DFT-s-OFDM	pi/2-BPSK	H	SISO	141	V	138	76	1/16	24.95
	38497.44	Mid	DFT-s-OFDM	16QAM	H	SISO	141	V	138	76	1/16	23.12
38497.44	Mid	DFT-s-OFDM	64QAM	H	SISO	141	V	138	76	1/16	20.90	

**Table 7-20. Ant 2 EIRP Data (Band n260 - 50MHz-1CC)**

CCs active	Frequency [MHz]	Channel	Transmission Scheme	Modulation	Beam Pol	Ant. Div.	BeamID	Ant. Pol. [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	RB Size/Offset	EIRP [dBm]
2	38497.44	Mid	DFT-s-OFDM	QPSK	V	SISO	13	H	270	41	32/0	21.50
	38497.44	Mid	DFT-s-OFDM	QPSK	H	SISO	141	V	131	77	32/0	21.92
	38497.44	Mid	DFT-s-OFDM	pi/2-BPSK	H	SISO	141	V	131	77	32/0	21.75
	38497.44	Mid	DFT-s-OFDM	16QAM	V	SISO	141	V	131	77.00	32/0	21.35
	38497.44	Mid	DFT-s-OFDM	64QAM	V	SISO	141	V	131	77.00	32/0	20.20

**Table 7-21. Ant 2 EIRP Data (Band n260 - 50MHz-2CC)**

CCs active	Frequency [MHz]	Channel	Transmission Scheme	Modulation	Beam Pol	Ant. Div.	BeamID	Ant. Pol. [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	RB Size/Offset	EIRP [dBm]
1	37027.32	Low	DFT-s-OFDM	QPSK	H	SISO	141	V	127	70	1/32	24.80
	38497.44	Mid	DFT-s-OFDM	QPSK	H	SISO	141	V	140	74	1/32	26.06
	38497.44	Mid	DFT-s-OFDM	QPSK	V	SISO	13	H	251	41	1/32	24.72
	38497.44	Mid	CP-OFDM	QPSK	H	SISO	141	V	140	74	1/32	23.10
	38497.44	Mid	CP-OFDM	QPSK	V	SISO	13	H	251	41	1/32	22.03
	38497.44	Mid	CP-OFDM	QPSK	H	MIMO	141	H	273	33	1/32	21.25
	39966.24	High	DFT-s-OFDM	QPSK	H	SISO	141	V	163	308	1/32	25.95
	38497.44	Mid	DFT-s-OFDM	pi/2-BPSK	H	SISO	141	V	140	74	1/32	25.80
	38497.44	Mid	DFT-s-OFDM	16QAM	H	SISO	141	V	140	74	1/32	24.35
	38497.44	Mid	DFT-s-OFDM	64QAM	H	SISO	141	V	140	74	1/32	22.17

**Table 7-22. Ant 2 EIRP Data (Band n260 - 100MHz-1CC)**

CCs active	Frequency [MHz]	Channel	Transmission Scheme	Modulation	Beam Pol	Ant. Div.	BeamID	Ant. Pol. [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	RB Size/Offset	EIRP [dBm]
2	38497.44	Mid	DFT-s-OFDM	QPSK	V	SISO	13	V	147	83	66/0	18.49
	38497.44	Mid	DFT-s-OFDM	QPSK	H	SISO	141	V	140	76	66/0	20.62
	38497.44	Mid	DFT-s-OFDM	pi/2-BPSK	H	SISO	141	V	140	76	66/0	20.54
	38497.44	Mid	DFT-s-OFDM	16QAM	H	SISO	141	V	140	76	66/0	20.15
	38497.44	Mid	DFT-s-OFDM	64QAM	H	SISO	141	V	140	76	66/0	19.35

**Table 7-23. Ant 2 EIRP Data (Band n260 - 100MHz-2CC)**

FCC ID: A3LSMN981U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 39 of 97	

## 7.4 Radiated Spurious and Harmonic Emissions

§2.1051, §30.203

### Test Overview

The spectrum is scanned from 30MHz to 100GHz for n261 and from 30MHz to 200GHz for n260. All out of band emissions are measured in a radiated test setup while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All modulations were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The conductive power or total radiated power of any emissions outside a licensee's frequency block shall be -13dBm/1MHz.***

### Test Procedure Used

ANSI C63.26-2015 Section 5.7.4

KDB 842590 D01 v01r01 Section 4.4.2 and Section 4.4.3

### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 100 GHz for n261 and 200GHz for n260. Several plots are used to show investigations in this entire span.
2. Detector = RMS
3. Trace mode = trace average
4. Sweep time = auto couple
5. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
6. The trace was allowed to stabilize
7. RBW = 1MHz, VBW = 3MHz

### Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) All radiated spurious emissions were measured as EIRP to compare with the §30.203 TRP limits.
- 3) Elements within the same antenna array are correlated to produce beamforming array gain. Antenna arrays cannot be correlated with another antenna array. During testing, only one antenna array was active.
- 4) The plots from 1-200GHz show corrected average EIRP levels. The average EIRP reported below is calculated per section 5.2.7 of ANSI C63.26-2015 which states:  $\text{EIRP (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8$ ; where D is the measurement distance (in the far field region) in m. The field strength E is calculated  $E \text{ (dB}\mu\text{V/m)} = \text{Spectrum Analyzer Level (dBm)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + \text{Harmonic Mixer Conversion Loss (dB)} + 107$ . All appropriate Antenna Factor and Cable Loss have been applied in the spectrum analyzer for each measurement. For measurements > 40GHz, Harmonic Mixer Conversion Loss was also applied to the spectrum analyzer.
- 5) Emissions below 18GHz were measured at a 3 meter test distance, while emissions above 18GHz were measured at the appropriate far field distance. The far field of the mmWave signal is based on formula:  $R > 2D^2/\text{wavelength}$ , where D is the larger between the dimension of the measurement antenna and the transmitting antenna of the EUT. In this case, D is the largest dimension of the measurement antenna.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 40 of 97



Frequency Range (GHz)	Wavelength(cm)	Far Field Distance (m)	Measurement Distance (m)
18-40	0.749	0.54	1.00
40-60	0.500	1.39	1.50
60-90	0.333	0.91	1.00
90-140	0.214	0.58	1.00
140-200	0.150	0.39	1.00


**Table 7-24. Far-Field Distance & Measurement Distance per Frequency Range**

- 6) All emissions from 30MHz - 40GHz were measured using a spectrum analyzer with an internal preamplifier. Emissions >40GHz were measured using a harmonic mixer with the spectrum analyzer.
- 7) All RSE's were measured with 1CC. It was determined that adding more CC's causes the overall amplitude of just 1CC to decrease, therefore, 1CC is the worst case for the purposes of spurious emissions measurements.
- 8) The "-" shown in the following RSE tables are used to denote a noise floor measurement.
- 9) All RSE's were investigated in EN-DC mode and with 802.11 chipset active. It was determined that there is no new emission introduced by EN-DC mode, or the 802.11 chipset. For EN-DC mode, n261 uses LTE B2, B5, B12, B13, B48 and B66, and n260 uses LTE B2, B5, B12, B13, B14, B30, B48 and B66.
- 10) There was no discernible difference in the spurious emission levels when using different LTE anchor bands. Thus, LTE Band 2 was used as a representative anchor band for EN-DC investigations.

<b>FCC ID:</b> A3LSMN981U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M2005050081-06-R1.A3L	<b>Test Dates:</b> 5/5/2020-7/08/2020	<b>EUT Type:</b> Portable Handset	Page 41 of 97	

## Band n261 – Ant 1

### 30MHz - 1GHz

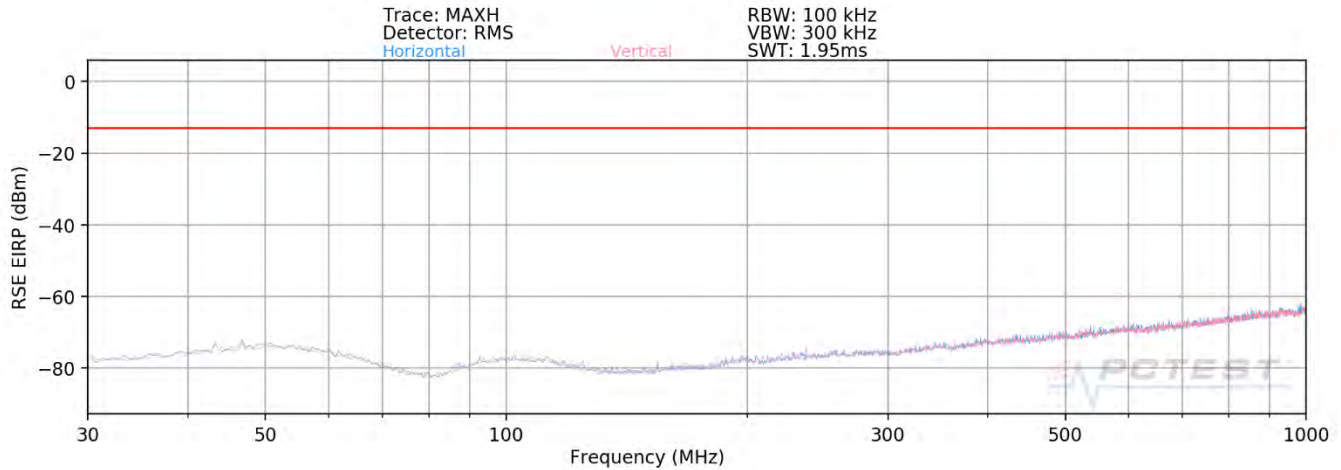

Plot 7-33. Ant 1- n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
34.25	Low	50	H	QPSK	V	-	-	-74.21	-13.00	-61.21
714.98	Mid	50	H	QPSK	V	-	-	-75.01	-13.00	-62.01
959.26	High	50	H	QPSK	V	-	-	-74.88	-13.00	-61.88


Table 7-25. Ant 1 - SISO -Spurious Emissions Table (30MHz - 1GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 3 meter.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 42 of 97

### 1GHz - 18GHz

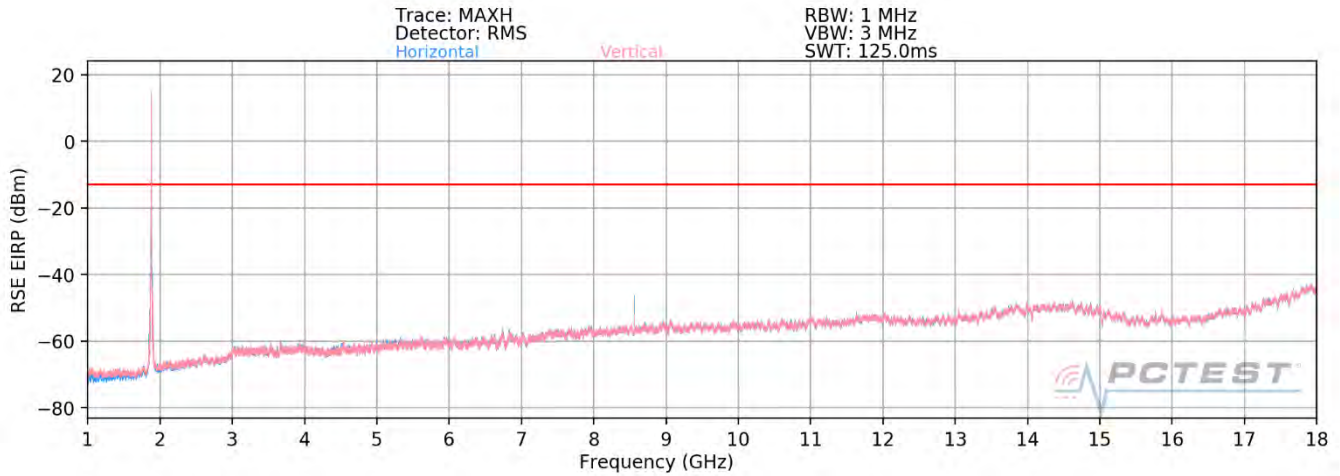

Plot 7-34. Ant 1-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
8799.00	Low	50	H	QPSK	H	112	164	-53.01	-13.00	-40.01
8571.73	Mid	50	H	QPSK	H	108	140	-54.20	-13.00	-41.20
8959.30	High	50	H	QPSK	H	116	155	-54.08	-13.00	-41.08


Table 7-26. Ant 1 - SISO -Spurious Emissions Table (1GHz - 18GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 3 meter.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 43 of 97	

## 18GHz - 27.5GHz

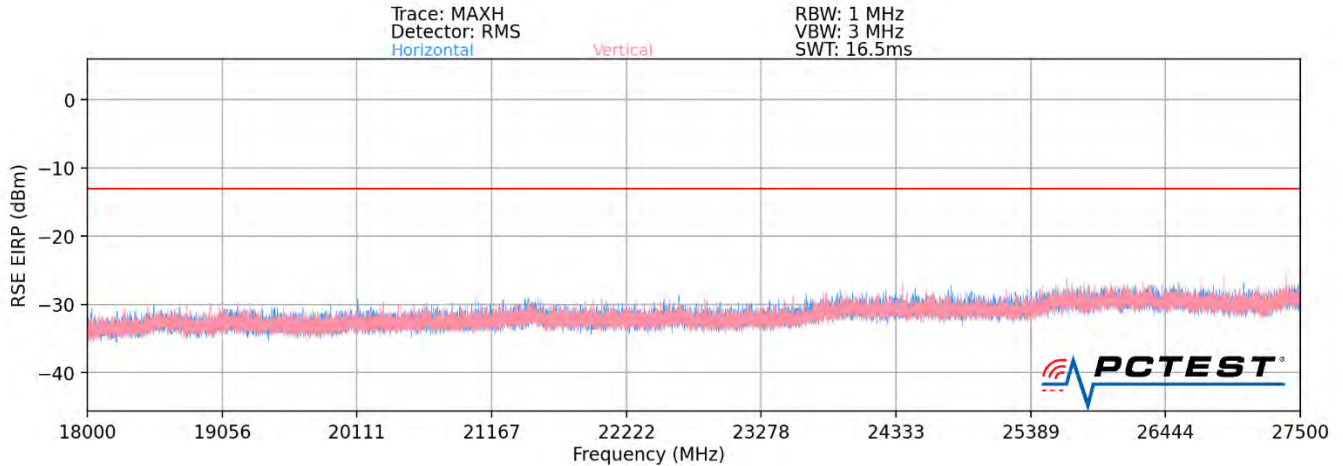

Plot 7-35. Ant 1-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor B2)

### Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
273872.23	Low	50	H	QPSK	H	34	192	-39.62	-13.00	-26.62
27399.57	Mid	50	H	QPSK	H	36	189	-40.67	-13.00	-27.67
27404.20	High	50	H	QPSK	H	39	193	-41.23	-13.00	-28.23


Table 7-27. Ant 1 - SISO -Spurious Emissions Table (18GHz - 27.5GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 44 of 97

## 28.35GHz - 40GHz

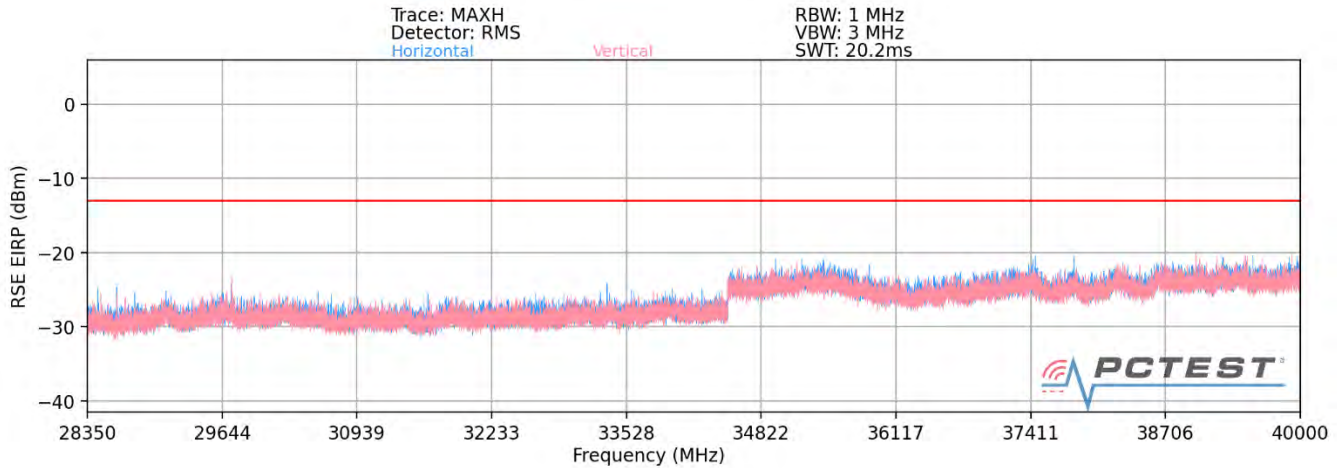

Plot 7-36. Ant 1-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor B2)

### Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
28447.72	Low	50	H	QPSK	H	42	195	-29.36	-13.00	-16.36
28539.80	Mid	50	H	QPSK	H	46	196	-25.94	-13.00	-12.94
28459.22	High	50	H	QPSK	H	48	155	-28.99	-13.00	-15.99


Table 7-28. Ant 1 - SISO -Spurious Emissions Table (28.35GHz - 40GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 45 of 97	

### 40GHz - 60GHz

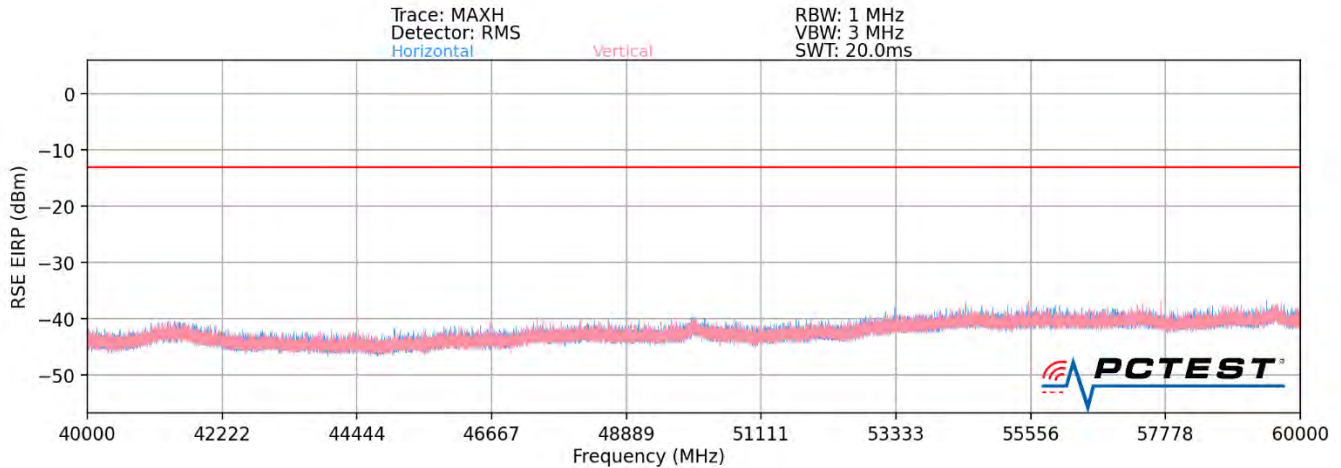

**Plot 7-37. Ant 1-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor B2)**

### Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1.5 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8 + \text{Harmonic Mixer Conversion Loss [dB]}$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
55050.00	Low	50	H	QPSK	H	226	275	-37.56	-13.00	-24.56
55851.31	Mid	50	H	QPSK	H	225	276	-36.72	-13.00	-23.72
56650.92	High	50	H	QPSK	H	202	262	-38.33	-13.00	-25.33


**Table 7-29. Ant 1 - SISO -Spurious Emissions Table (40GHz - 60GHz)**

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1.5 meter.

FCC ID: A3LSMN981U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 46 of 97

## 60GHz - 90GHz

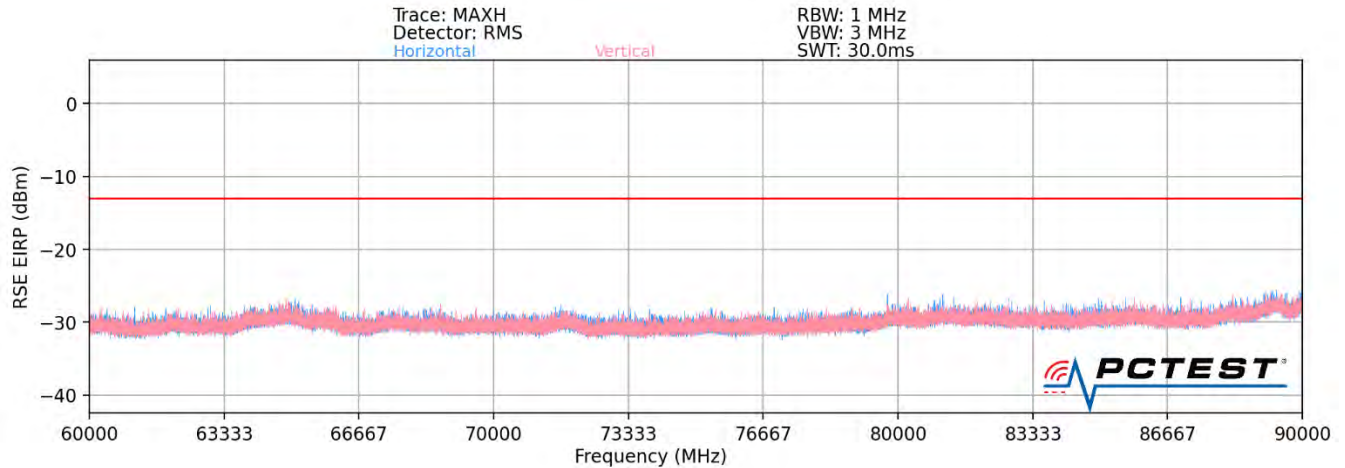

Plot 7-38. Ant 1-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor B2)

### Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm)** = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
82577.44	Low	50	H	QPSK	H	-	-	-47.58	-13.00	-34.58
83786.14	Mid	50	H	QPSK	H	-	-	-47.95	-13.00	-34.95
84976.66	High	50	H	QPSK	H	-	-	-47.66	-13.00	-34.66


Table 7-30. Ant 1 - SISO -Spurious Emissions Table (60GHz - 90GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 47 of 97

## 90GHz - 100GHz

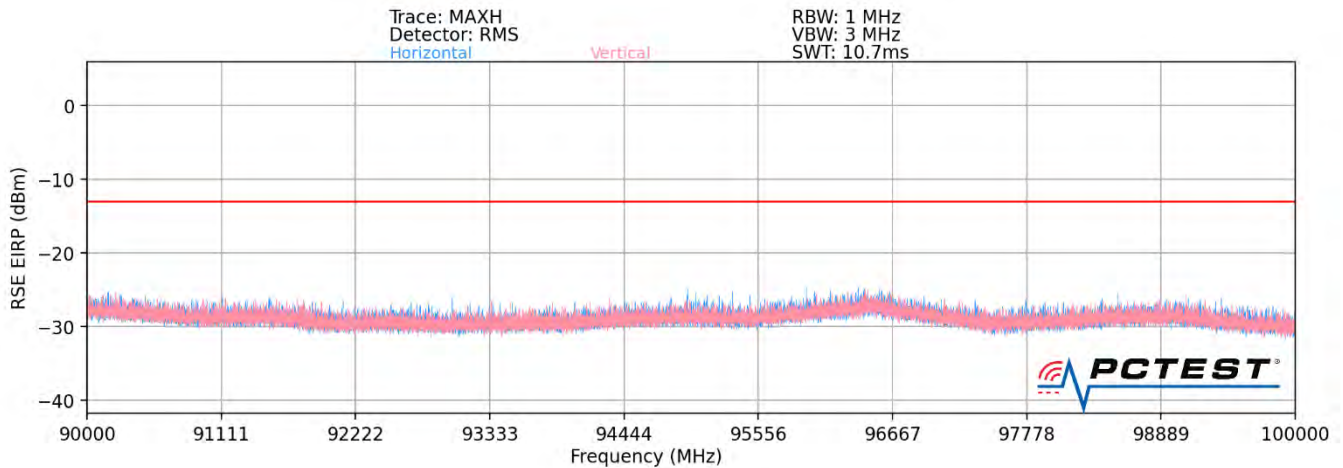

Plot 7-39. Ant 1-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor B2)

### Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
95499.99	Low	50	H	QPSK	H	-	-	-46.33	-13.00	-33.33
95495.83	Mid	50	H	QPSK	H	-	-	-46.89	-13.00	-33.89
95499.90	High	50	H	QPSK	H	-	-	-47.01	-13.00	-34.01

Table 7-31. Ant 1 - SISO -Spurious Emissions Table (90GHz - 100GHz)

### Notes


The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 48 of 97



## Band n261 – Ant 2

### 30MHz - 1GHz

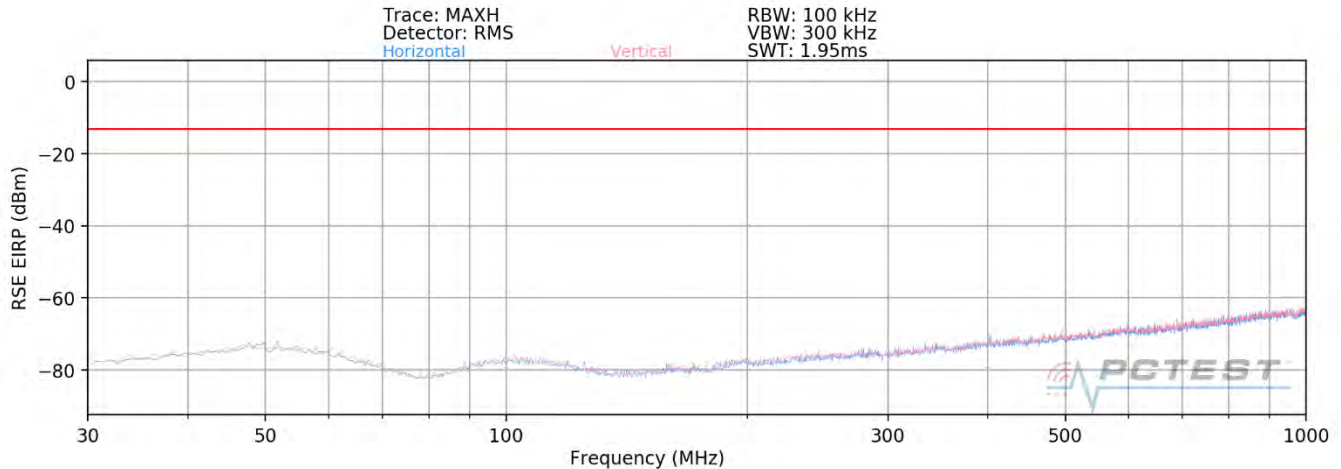

Plot 7-40. Ant 2-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
30.66	Low	50	H	QPSK	V	-	-	-70.54	-13.00	-57.54
711.23	Mid	50	H	QPSK	V	-	-	-71.52	-13.00	-58.52
958.69	High	50	H	QPSK	V	-	-	-70.66	-13.00	-57.66


Table 7-32. Ant 2 - SISO -Spurious Emissions Table (30MHz - 1GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 3 meter.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 49 of 97

## 1GHz - 18GHz

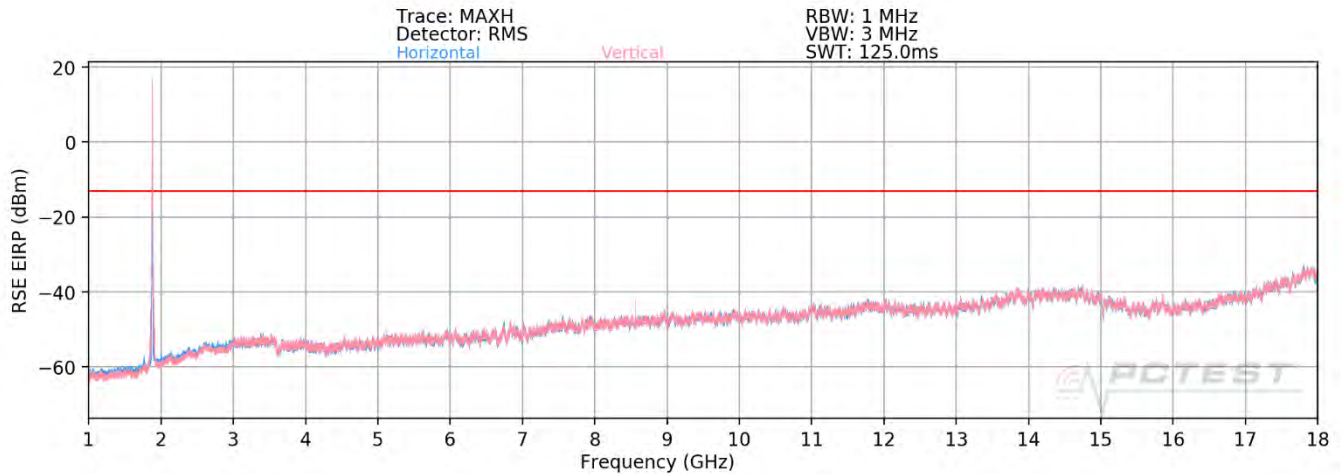

Plot 7-41. Ant 2-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
8799.00	Low	50	H	QPSK	V	24	118	-45.68	-13.00	-32.68
8571.73	Mid	50	H	QPSK	V	10	113	-46.99	-13.00	-33.99
8959.30	High	50	H	QPSK	V	22	134	-46.09	-13.00	-33.09


Table 7-33. Ant 2 - SISO -Spurious Emissions Table (1GHz - 18GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 3 meter.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 50 of 97

## 18GHz - 27.5GHz

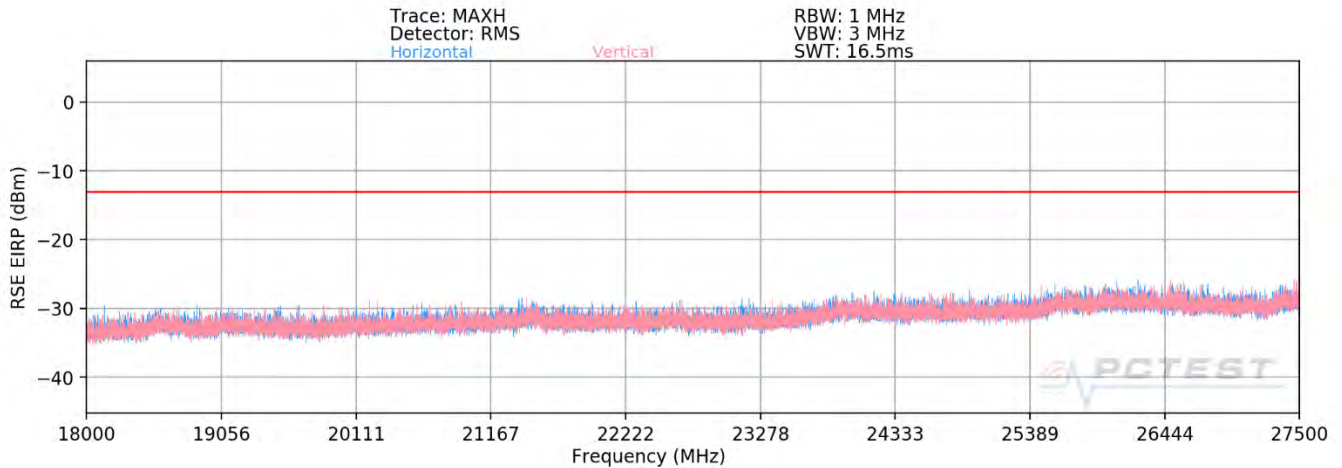

Plot 7-42. Ant 2-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor B2)

### Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
27371.50	Low	50	H	QPSK	V	339	53	-39.42	-13.00	-26.42
27388.32	Mid	50	H	QPSK	V	332	183	-38.97	-13.00	-25.97
27404.11	High	50	H	QPSK	V	337	317	-42.61	-13.00	-29.61


Table 7-34. Ant 2 - SISO -Spurious Emissions Table (18GHz - 27.5GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 51 of 97

## 28.35GHz - 40GHz

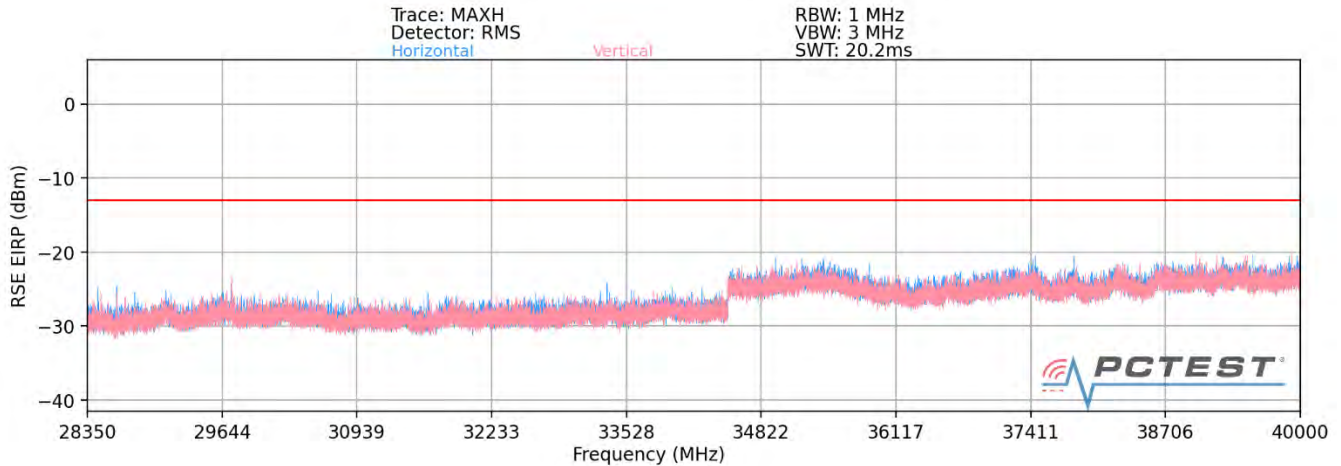

Plot 7-43. Ant 2-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor B2)

### Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
28615.36	Low	50	H	QPSK	V	339	317	-40.98	-13.00	-27.98
28539.36	Mid	50	H	QPSK	V	339	318	-40.68	-13.00	-27.68
28479.20	High	50	H	QPSK	V	339	316	-39.36	-13.00	-26.36


Table 7-35. Ant 2 - SISO -Spurious Emissions Table (28.35GHz - 40GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 52 of 97	

## 40GHz - 60GHz

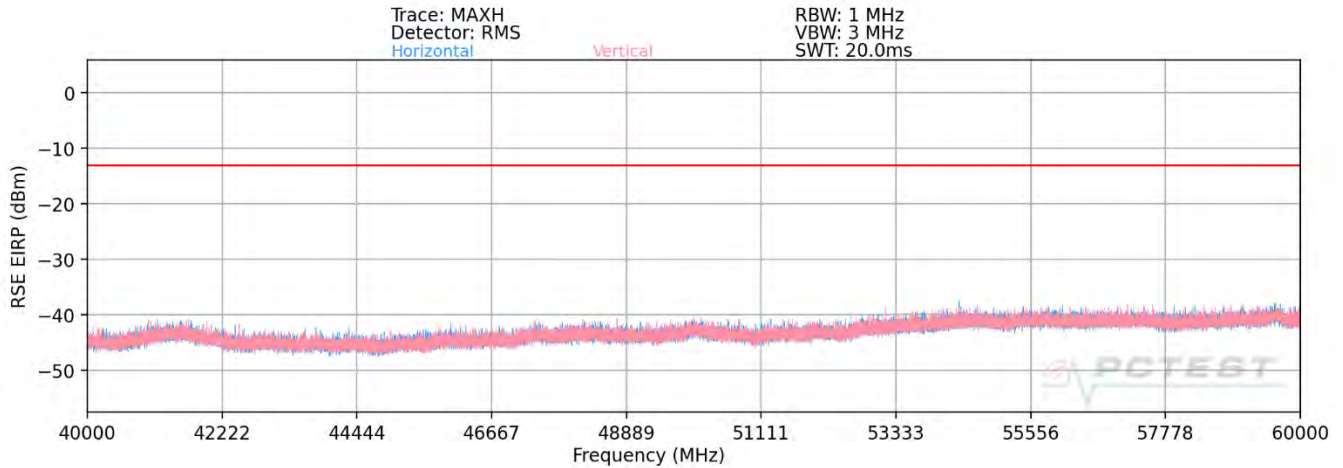

Plot 7-44. Ant 2-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor B2)

### Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1.5 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8 + \text{Harmonic Mixer Conversion Loss [dB]}$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
55051.71	Low	50	H	QPSK	V	19	331	-40.13	-13.00	-27.13
55821.20	Mid	50	H	QPSK	V	18	329	-39.81	-13.00	-26.81
56650.98	High	50	H	QPSK	V	16	335	-39.51	-13.00	-26.51


Table 7-36. Ant 2 - SISO -Spurious Emissions Table (40GHz - 60GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1.5 meter.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 53 of 97

## 60GHz - 90GHz

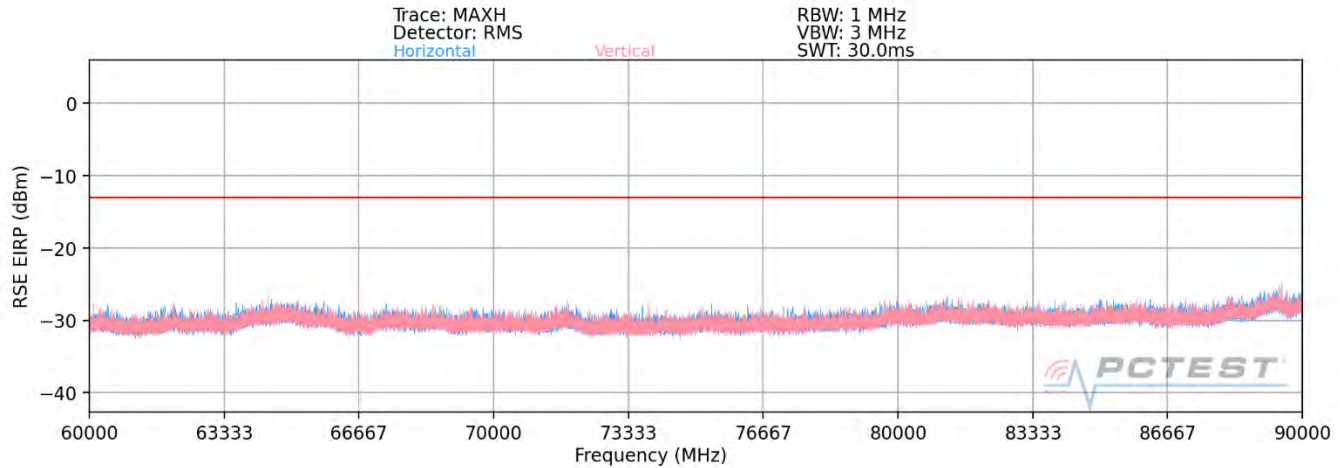

Plot 7-45. Ant 2-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor B2)

### Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
82577.44	Low	50	H	QPSK	V	-	-	-47.81	-13.00	-34.81
83786.14	Mid	50	H	QPSK	V	-	-	-46.82	-13.00	-33.82
84976.66	High	50	H	QPSK	V	-	-	-47.28	-13.00	-34.28


Table 7-37. Ant 2 - SISO -Spurious Emissions Table (60GHz - 90GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 54 of 97

### 90GHz - 100GHz

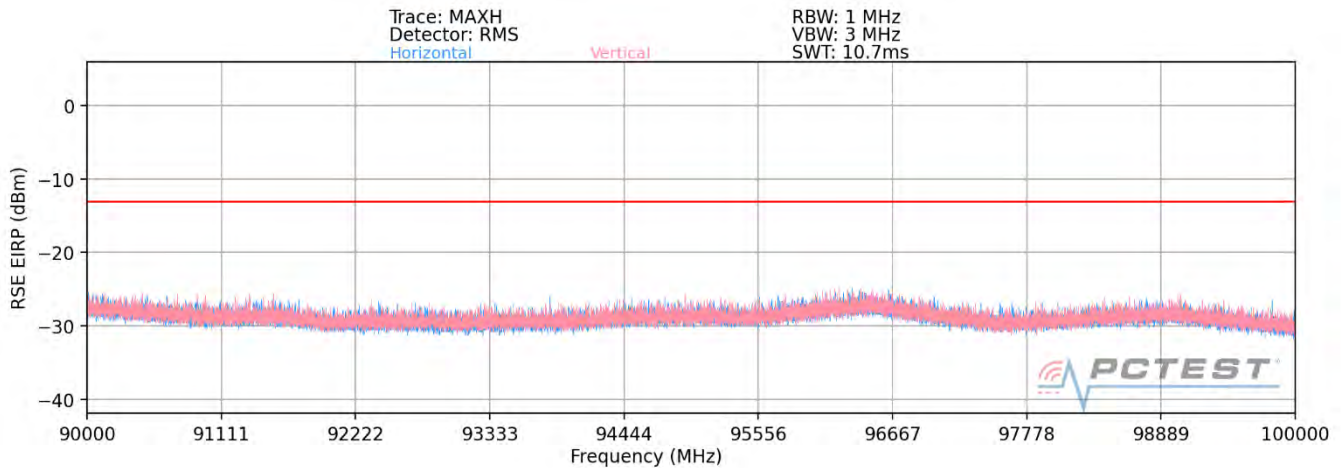

**Plot 7-46. Ant 2-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor B2)**

### Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8 + \text{Harmonic Mixer Conversion Loss [dB]}$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
95499.99	Low	50	H	QPSK	V	-	-	-44.69	-13.00	-31.69
95495.83	Mid	50	H	QPSK	V	-	-	-44.35	-13.00	-31.35
95499.90	High	50	H	QPSK	V	-	-	-44.72	-13.00	-31.72

**Table 7-38. Ant 2 - SISO -Spurious Emissions Table (90GHz - 100GHz)**


### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMN981U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 55 of 97

## Band n260- Ant 1

### 30MHz - 1GHz

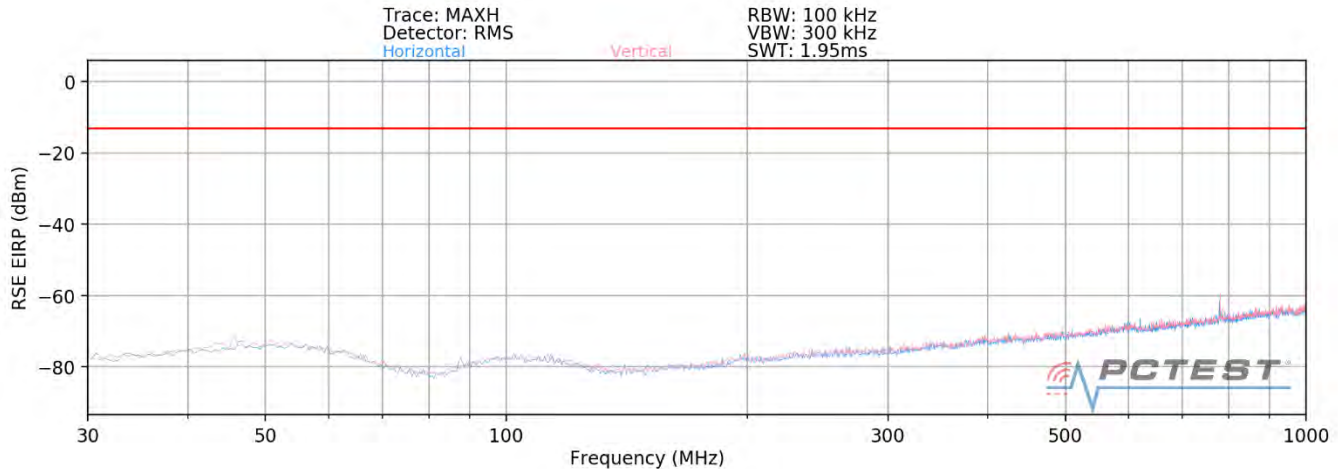

Plot 7-47. Ant 1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
204.00	Low	50	H	QPSK	H	-	-	-78.81	-13.00	-65.81
398.66	Mid	50	H	QPSK	H	-	-	-77.69	-13.00	-64.69
987.66	High	50	H	QPSK	H	-	-	-65.46	-13.00	-52.46

Table 7-39. Ant 1 - MIMO -Spurious Emissions Table (30MHz - 1GHz)


### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 3 meter.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 56 of 97	



## 1GHz - 18GHz

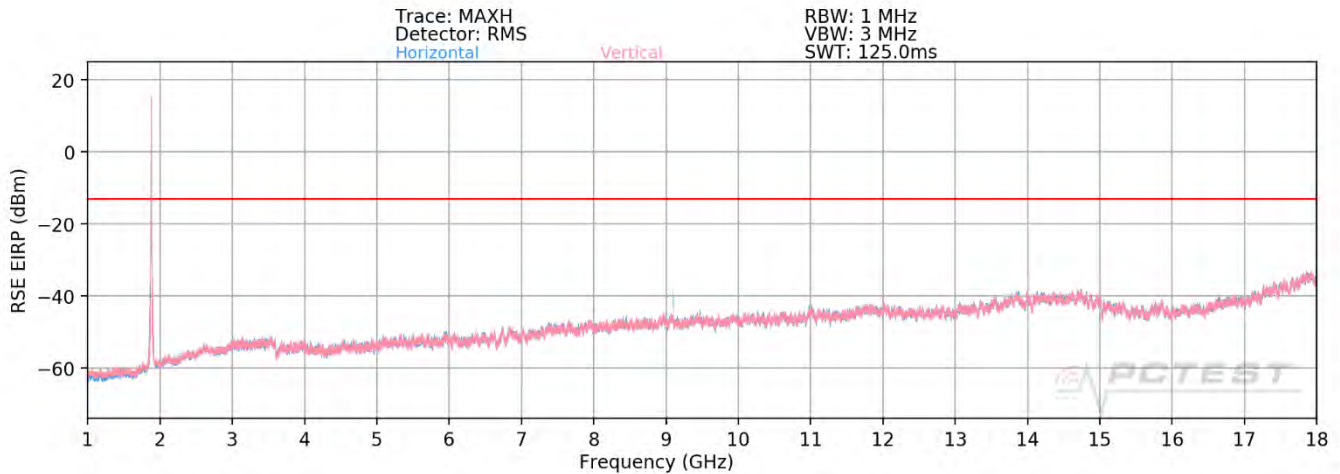

Plot 7-48. Ant 1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
8405.33	Low	50	H	QPSK	H	341	214	-45.69	-13.00	-32.69
9113.25	Mid	50	H	QPSK	H	339	222	-46.36	-13.00	-33.36
9156.66	High	50	H	QPSK	H	316	245	-45.98	-13.00	-32.98


Table 7-40. Ant 1 - MIMO -Spurious Emissions Table (1GHz - 18GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 3 meter.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 57 of 97	

## 18GHz – 37GHz

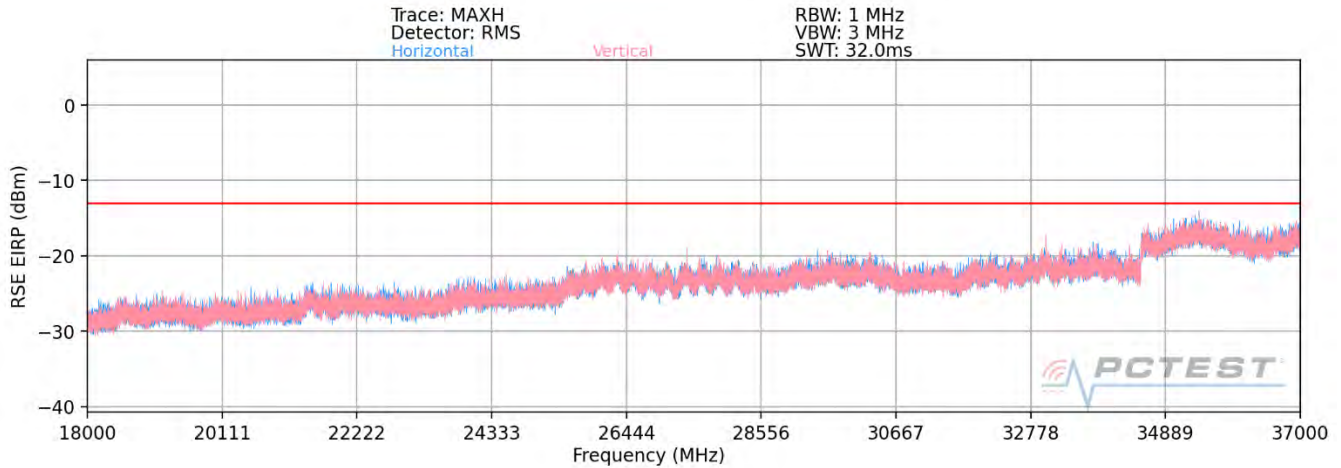

**Plot 7-49. Ant 1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)**

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log}(Dm) - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
34523.72	Low	50	H	QPSK	H	-	-	-33.07	-13.00	-20.07
36516.58	Mid	50	H	QPSK	H	-	-	-33.04	-13.00	-20.04
36681.72	High	50	H	QPSK	H	-	-	-33.32	-13.00	-20.32


**Table 7-41. Ant 1 - MIMO -Spurious Emissions Table (18GHz – 37GHz)**

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 58 of 97	

## 40GHz - 60GHz

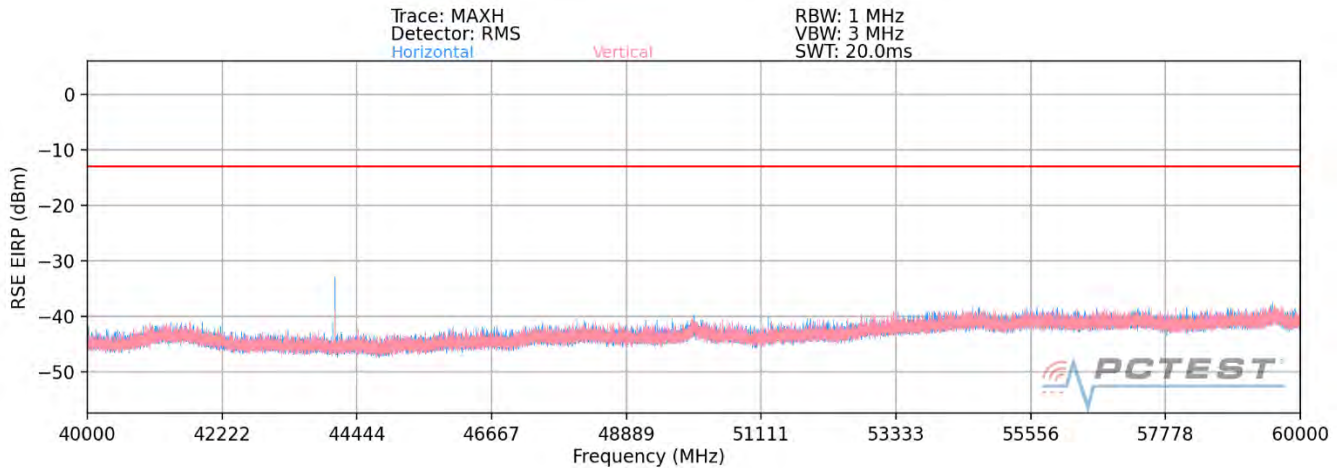

Plot 7-50. Ant 1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1.5 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8 + \text{Harmonic Mixer Conversion Loss [dB]}$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
42931.18	Low	50	H	QPSK	V	356	261	-34.37	-13.00	-21.37
44083.42	Mid	50	H	QPSK	V	358	262	-35.11	-13.00	-22.11
46233.60	High	50	H	QPSK	V	243	357	-34.08	-13.00	-21.08


Table 7-42. Ant 1 - MIMO -Spurious Emissions Table (40GHz - 60GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1.5 meter.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 59 of 97

## 60GHz - 90GHz

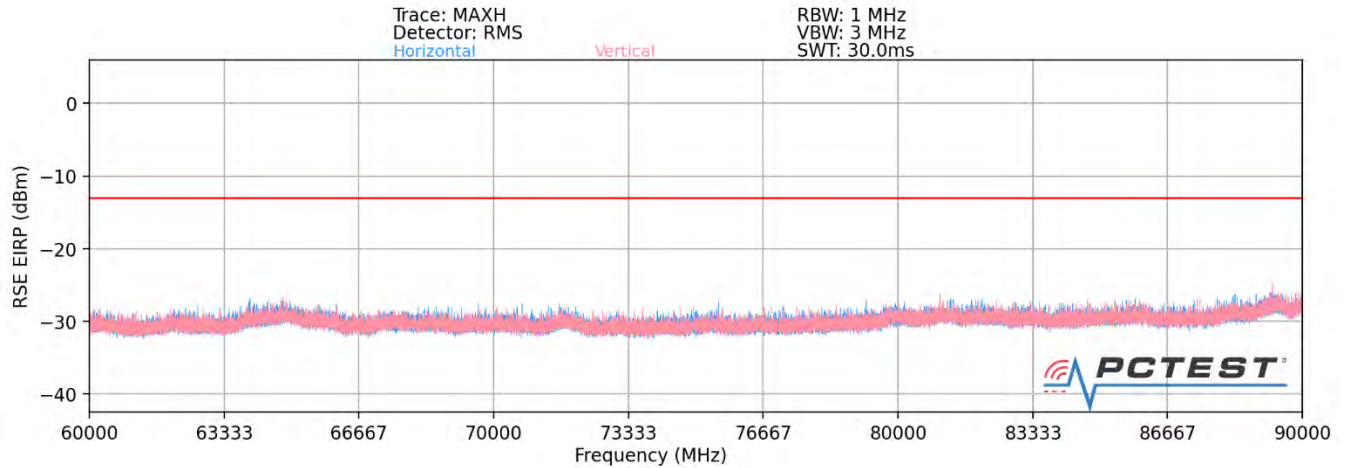

**Plot 7-51. Ant 1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)**

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8 + \text{Harmonic Mixer Conversion Loss [dB]}$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
74051.22	Low	50	H	QPSK	H	157	136	-45.84	-13.00	-32.84
77000.80	Mid	50	H	QPSK	H	151	151	-44.54	-13.00	-31.54
79936.58	High	50	H	QPSK	H	-	-	-46.39	-13.00	-33.39


**Table 7-43. Ant 1 - MIMO -Spurious Emissions Table (60GHz - 90GHz)**

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 60 of 97

## 90GHz - 140GHz

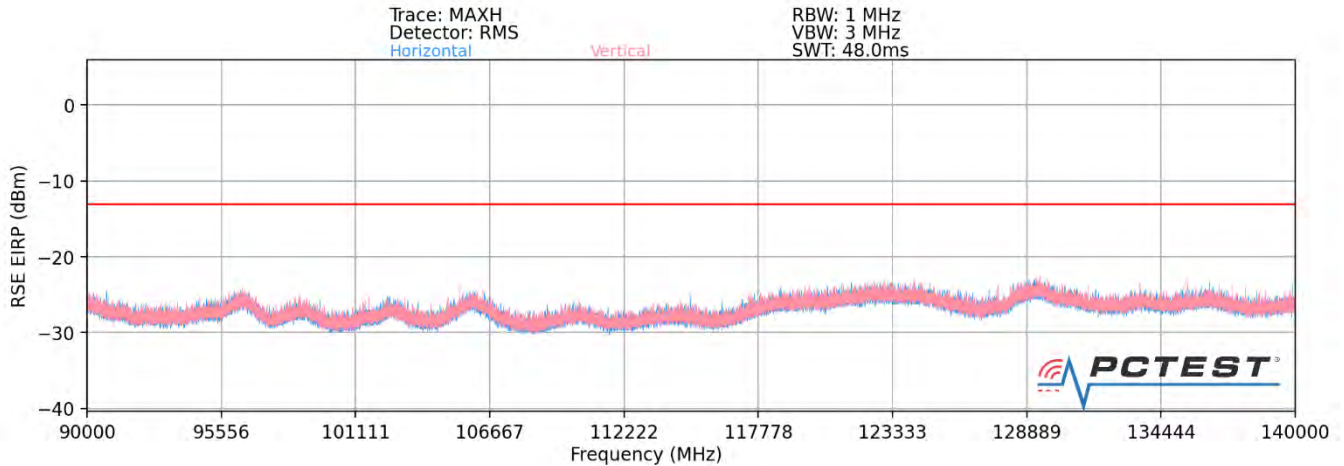

Plot 7-52. Ant 1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8 + \text{Harmonic Mixer Conversion Loss [dB]}$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
111076.88	Low	50	H	QPSK	H	169	198	-42.64	-13.00	-29.64
115501.34	Mid	50	H	QPSK	H	154	214	-41.28	-13.00	-28.28
119934.60	High	50	H	QPSK	H	-	-	-44.01	-13.00	-31.01


Table 7-44. Ant 1 - MIMO -Spurious Emissions Table (90GHz - 140GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 61 of 97

## 140GHz - 170GHz

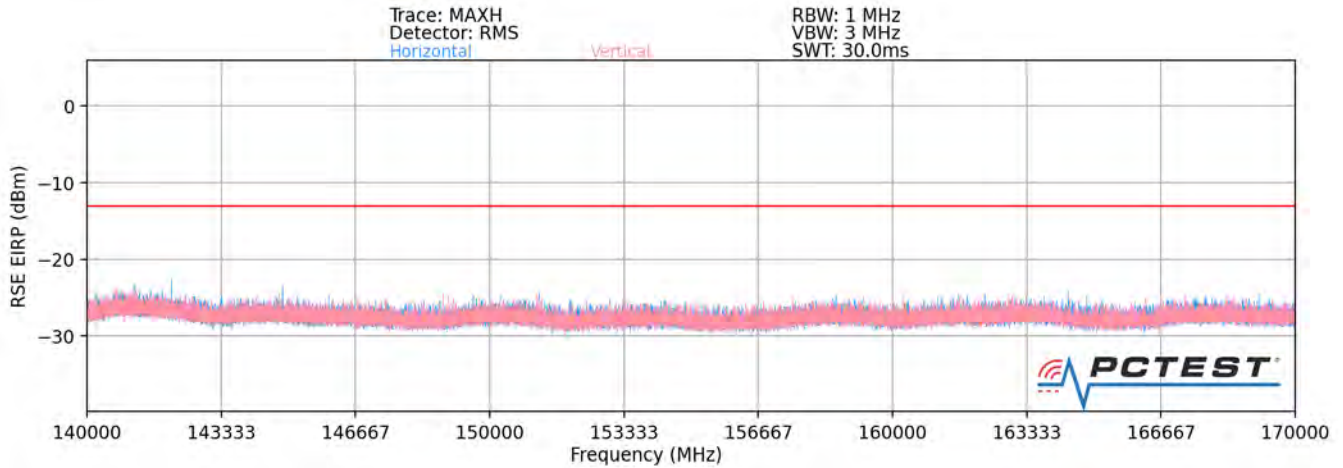

Plot 7-53. Ant 1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8 + \text{Harmonic Mixer Conversion Loss [dB]}$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
141471.11	Low	50	H	QPSK	H	-	-	-40.26	-13.00	-27.26
141448.52	Mid	50	H	QPSK	H	-	-	-40.38	-13.00	-27.38
141460.21	High	50	H	QPSK	H	-	-	-40.24	-13.00	-27.24


Table 7-45. Ant 1 - MIMO -Spurious Emissions Table (140GHz - 170GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 62 of 97

## 170GHz - 200GHz

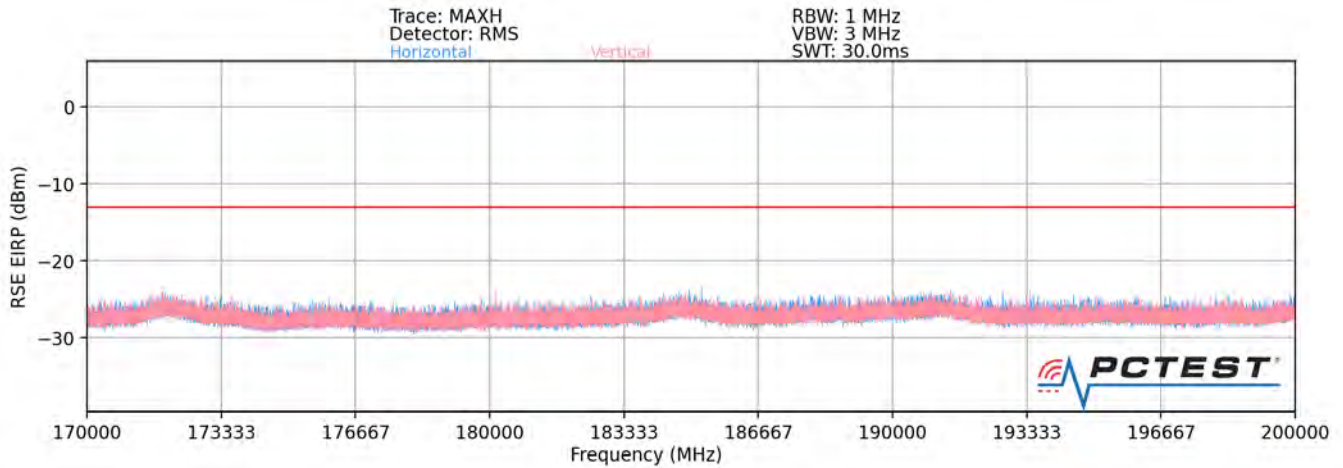

Plot 7-54. Ant 1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8 + \text{Harmonic Mixer Conversion Loss [dB]}$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
172025.58	Low	50	H	QPSK	H	-	-	-41.69	-13.00	-28.69
172011.54	Mid	50	H	QPSK	H	-	-	-41.78	-13.00	-28.78
172047.16	High	50	H	QPSK	H	-	-	-41.62	-13.00	-28.62

Table 7-46. Ant 1 - MIMO -Spurious Emissions Table (170GHz - 200GHz)


### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset	Page 63 of 97	

## Band n260- Ant 2

### 30MHz - 1GHz

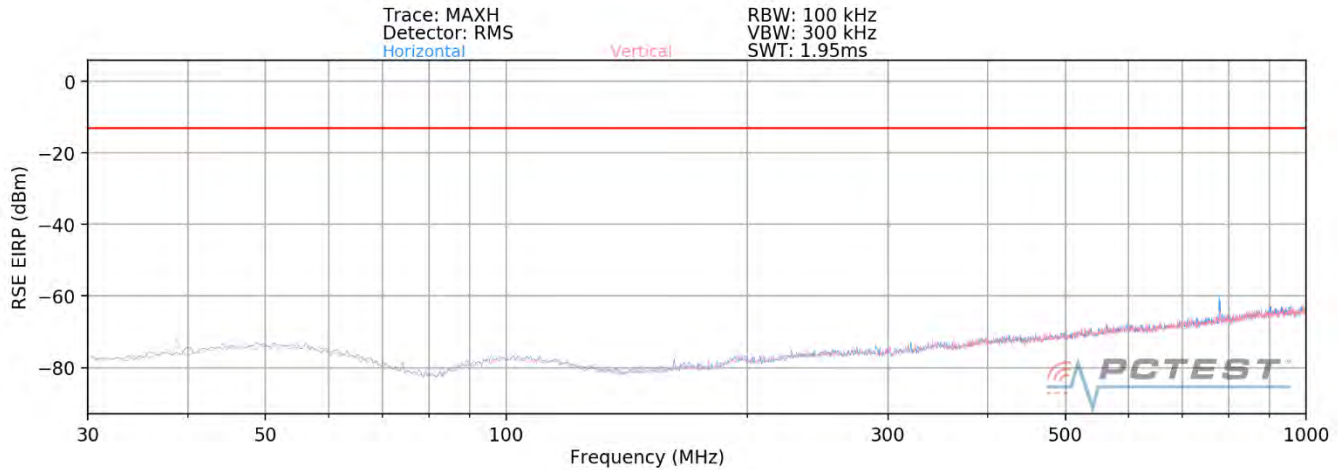

Plot 7-55. Ant 2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
204.00	Low	50	H	QPSK	H	-	-	-75.69	-13.00	-62.69
398.66	Mid	50	H	QPSK	H	-	-	-72.15	-13.00	-59.15
987.66	High	50	H	QPSK	H	-	-	-64.33	-13.00	-51.33

Table 7-47. Ant 2 - SISO -Spurious Emissions Table (30MHz - 1GHz)


### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 3 meter.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 64 of 97



## 1GHz - 18GHz

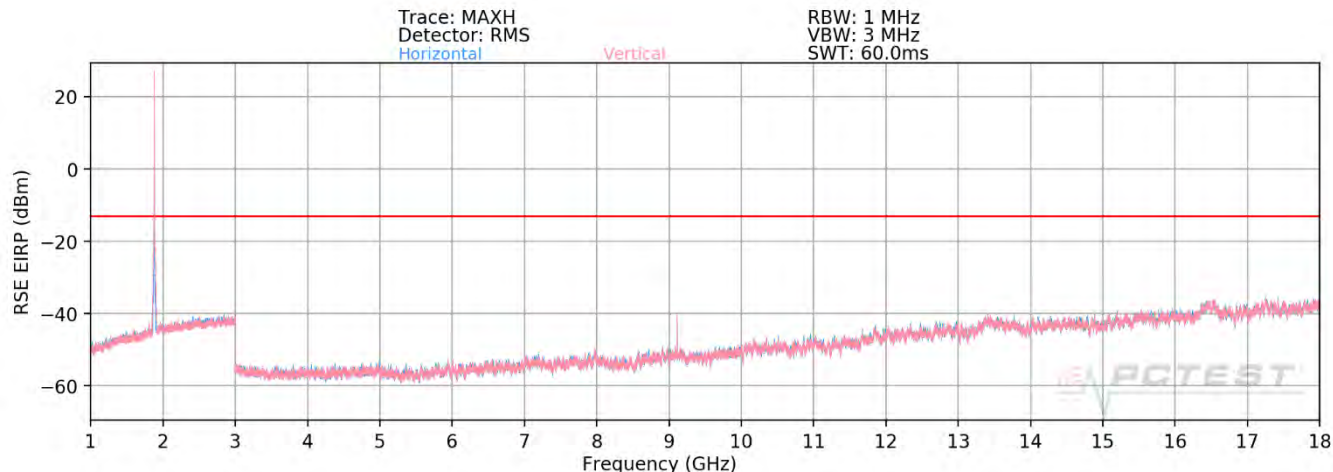

Plot 7-56. Ant 2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
8405.33	Low	50	H	QPSK	H	200	286	-44.21	-13.00	-31.21
9113.25	Mid	50	H	QPSK	H	194	274	-43.26	-13.00	-30.26
9156.66	High	50	H	QPSK	H	184	206	-46.33	-13.00	-33.33


Table 7-48. Ant 2 - SISO -Spurious Emissions Table (1GHz - 18GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 3 meter.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 65 of 97

## 18GHz – 37GHz

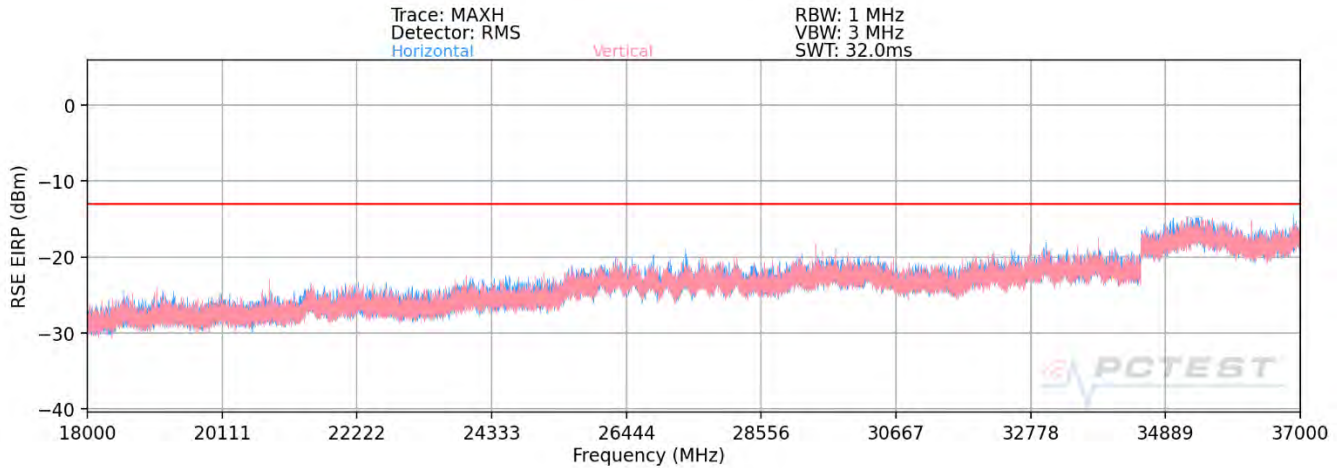

Plot 7-57. Ant 2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log}(Dm) - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
34531.21	Low	50	H	QPSK	H	-	-	-33.11	-13.00	-20.11
36517.88	Mid	50	H	QPSK	H	-	-	-34.61	-13.00	-21.61
36692.20	High	50	H	QPSK	H	-	-	-33.52	-13.00	-20.52


Table 7-49. Ant 2 - SISO -Spurious Emissions Table (18GHz – 37GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 66 of 97

## 40GHz - 60GHz

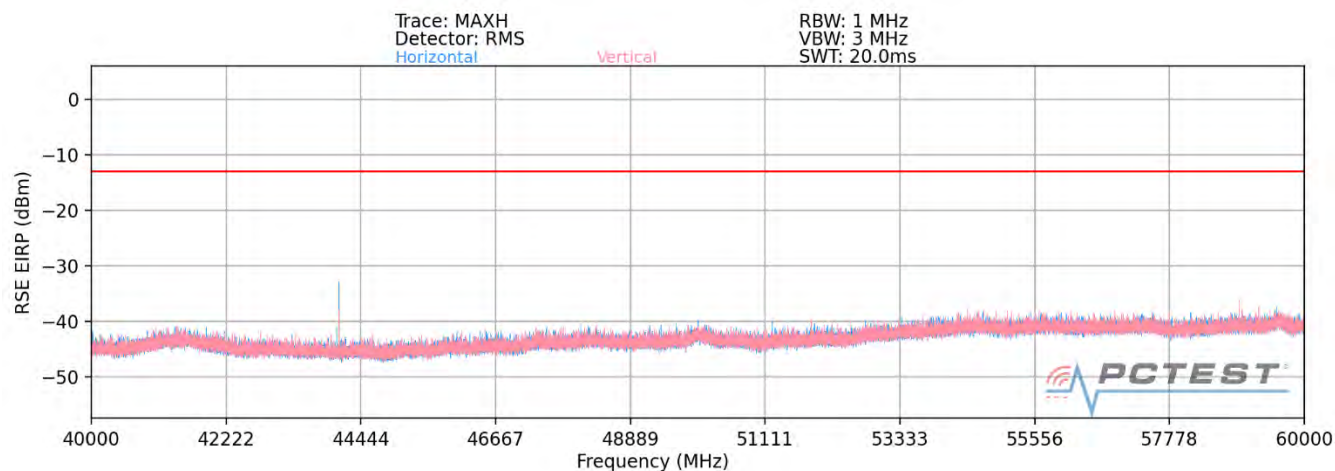

**Plot 7-58. Ant 2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)**

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1.5 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8 + \text{Harmonic Mixer Conversion Loss [dB]}$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
42931.10	Low	50	H	QPSK	H	328	85	-33.89	-13.00	-20.89
44083.00	Mid	50	H	QPSK	H	313	78	-33.69	-13.00	-20.69
46233.48	High	50	H	QPSK	H	340	84	-33.72	-13.00	-20.72


**Table 7-50. Ant 2 - SISO -Spurious Emissions Table (40GHz - 60GHz)**

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1.5 meter.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 67 of 97	

## 60GHz - 90GHz

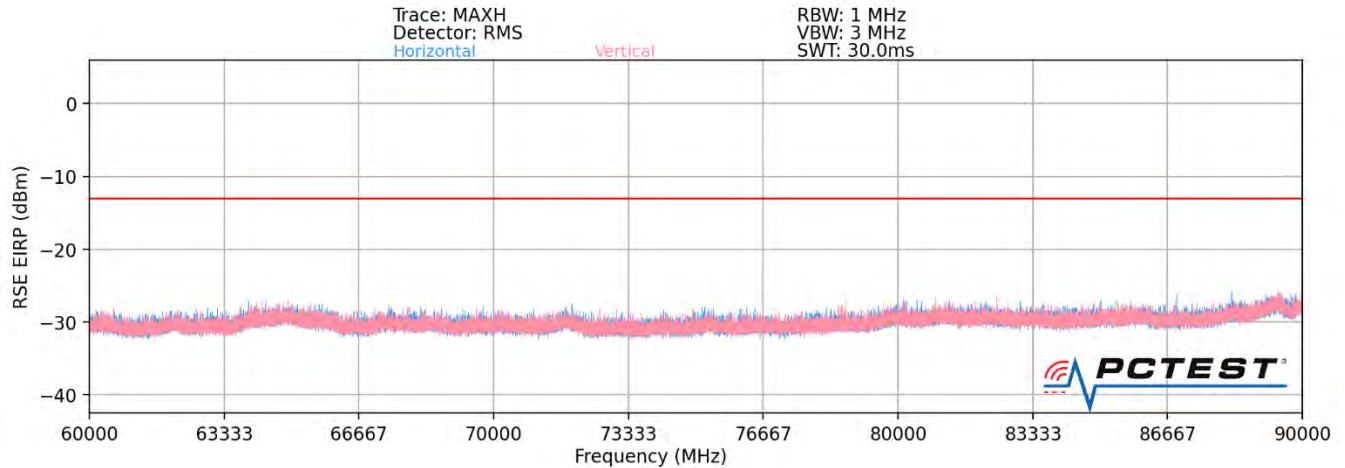

Plot 7-34. Ant 2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8 + \text{Harmonic Mixer Conversion Loss [dB]}$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
74051.22	Low	50	H	QPSK	V	108	76	-46.52	-13.00	-33.52
77001.33	Mid	50	H	QPSK	V	134	57	-44.58	-13.00	-31.58
79950.57	High	50	H	QPSK	V	115	75	-49.11	-13.00	-36.11


Table 7-51. Ant 2 - SISO -Spurious Emissions Table (60GHz - 90GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 68 of 97

## 90GHz - 140GHz

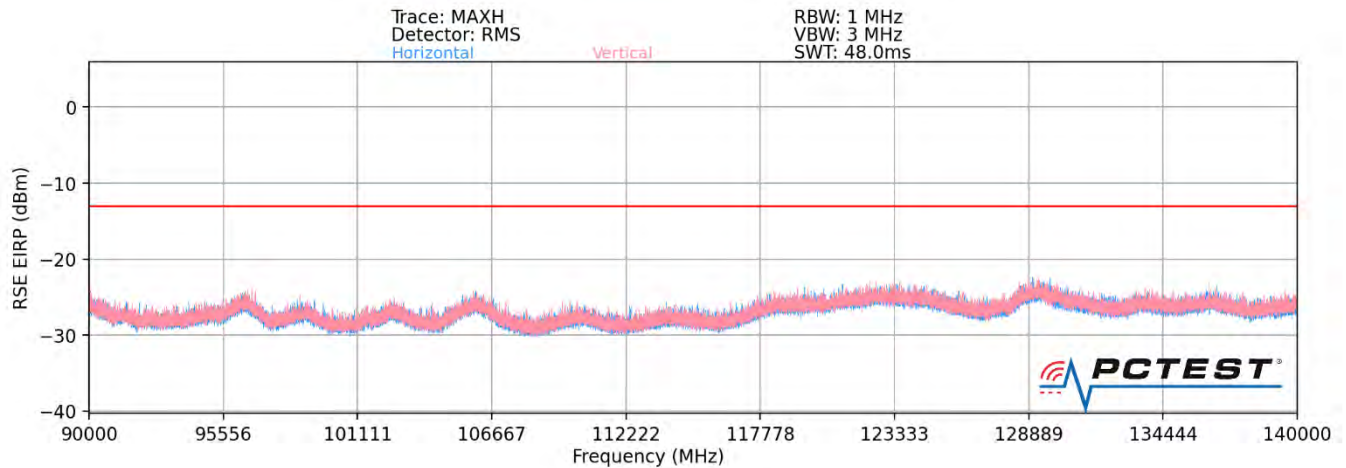

Plot 7-60. Ant 2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8 + \text{Harmonic Mixer Conversion Loss [dB]}$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
83557.50	Low	50	H	QPSK	V	-	-	-49.71	-13.00	-36.71
115499.95	Mid	50	H	QPSK	V	-	-	-49.81	-13.00	-36.81
119925.00	High	50	H	QPSK	V	-	-	-49.66	-13.00	-36.66


Table 7-52. Ant2 - SISO -Spurious Emissions Table (90GHz - 140GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 69 of 97	

## 140GHz - 170GHz

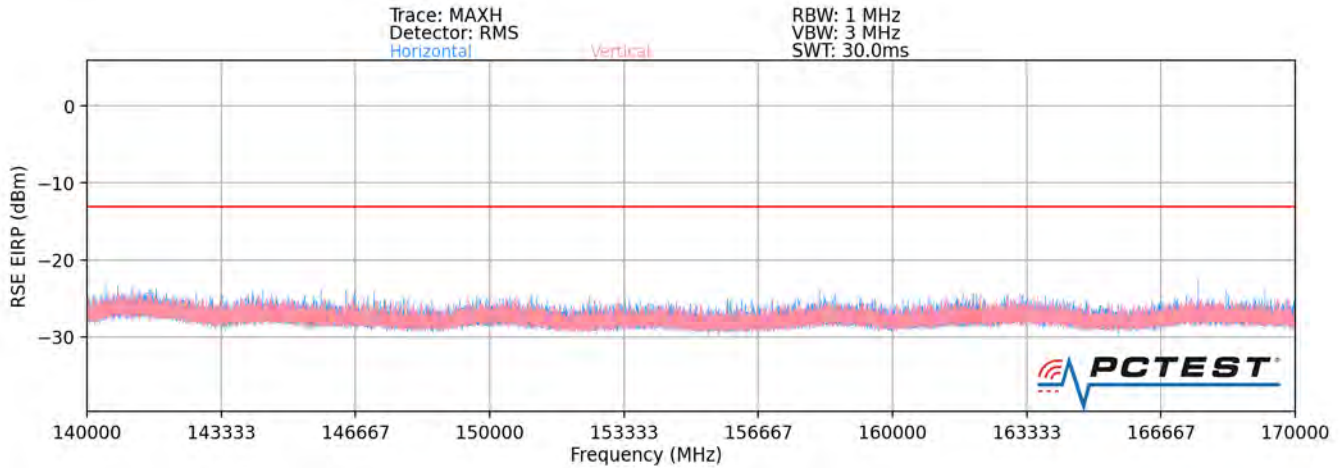

Plot 7-61. Ant 2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8 + \text{Harmonic Mixer Conversion Loss [dB]}$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
148109.28	Low	50	H	QPSK	V	-	-	-48.95	-13.00	-35.95
153989.76	Mid	50	H	QPSK	V	-	-	-49.12	-13.00	-36.12
159864.96	High	50	H	QPSK	V	-	-	-49.22	-13.00	-36.22


Table 7-53. Ant 2 - SISO -Spurious Emissions Table (140GHz - 170GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 70 of 97

## 170GHz - 200GHz

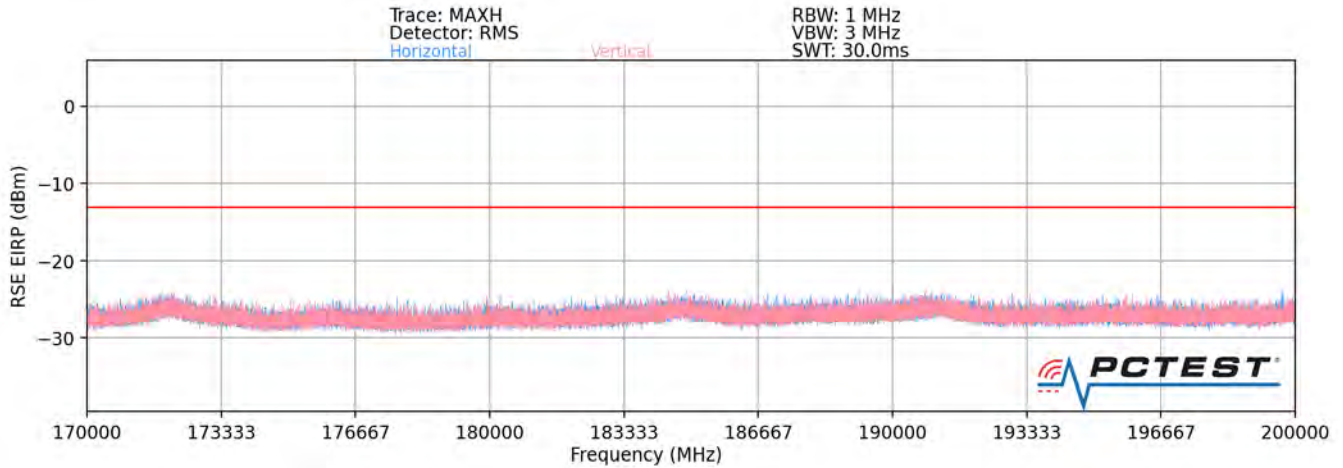

Plot 7-62. Ant 2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – EN-DC Anchor Band 2)

### Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8 + \text{Harmonic Mixer Conversion Loss [dB]}$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
185136.60	Low	50	H	QPSK	V	-	-	-49.40	-13.00	-36.40
192487.20	Mid	50	H	QPSK	V	-	-	-49.30	-13.00	-36.30
199831.20	High	50	H	QPSK	V	-	-	-49.36	-13.00	-36.36

Table 7-54. Ant 2 - SISO -Spurious Emissions Table (170GHz - 200GHz)

### Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 71 of 97

## 7.5 Band Edge Emissions

§2.1051, §30.203

### Test Overview

All out of band emissions are measured in a radiated setup while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All modulations were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The minimum permissible attenuation level of any spurious emission is -13dBm/1MHz. However, in the bands immediately outside and adjacent to the licensee's frequency block, having a bandwidth equal to 10 percent of the channel bandwidth, the conductive power or the total radiated power of any emission shall be -5 dBm/MHz or lower.***

### Test Procedure Used

ANSI C63.26-2015 Section 5 and ANSI C63.26-2015 Section 6.4  
KDB 842590 D01 v01r01 Section 4.4.2.5

### Test Settings

1. Start and stop frequency were set such that both upper and lower band edges are measured.
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 1MHz
4. VBW  $\geq$  3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq$  2 x Span/RBW
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning.
- 2) Band Edge emissions were measured at a 1 meter distance.
- 3) The spectrum analyzer for each measurement shows an offset value that was determined using the measurement antenna factor, cable loss, far field measurement distance. A sample calculation is shown on the following page.
- 4) This device supports transmission of H-polarized and V-polarized beams from the antenna array in both CP-OFDM and DFT-s-OFDM transmission schemes. SISO and MIMO operation is also supported for some configurations. As part of the testing, all modes were fully investigated and only the worst case has been included in this report.
- 5) All combinations of 1CC and 2CC were fully investigated, and only the worst case has been included in this report.
- 6) All 2CC cases were investigated with PCC prioritization feature, which was the higher PCC at the band edge for the worst case.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 72 of 97



**Sample Analyzer Offset Calculation (at 27.5GHz)**

Measurement Antenna Factor = 40.70dB/m

Cable Loss = 8.82dB


$$\begin{aligned} \text{Analyzer Offset (dB)} &= \text{AF (dB/m)} + \text{CL (dB)} + 107 + 20\log_{10}(D) - 104.8\text{dB, where } D = 1\text{m} \\ &= 40.70\text{dB/m} + 8.82\text{dB} + 107 + 20\log_{10}(1\text{m}) - 104.8\text{dB} \\ &= 51.72\text{dB} \end{aligned}$$

**Note:**


While it is allowed to use the antenna gain subtraction method in the band edge as it is defined in Part 30, the device meets the requirements via early exit condition as specified in KDB publication 842590 D01.

FCC ID: A3LSMN981U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	 <b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M2005050081-06-R1.A3L	<b>Test Dates:</b> 5/5/2020-7/08/2020	<b>EUT Type:</b> Portable Handset	Page 73 of 97

### Band n261 – Worst-Case

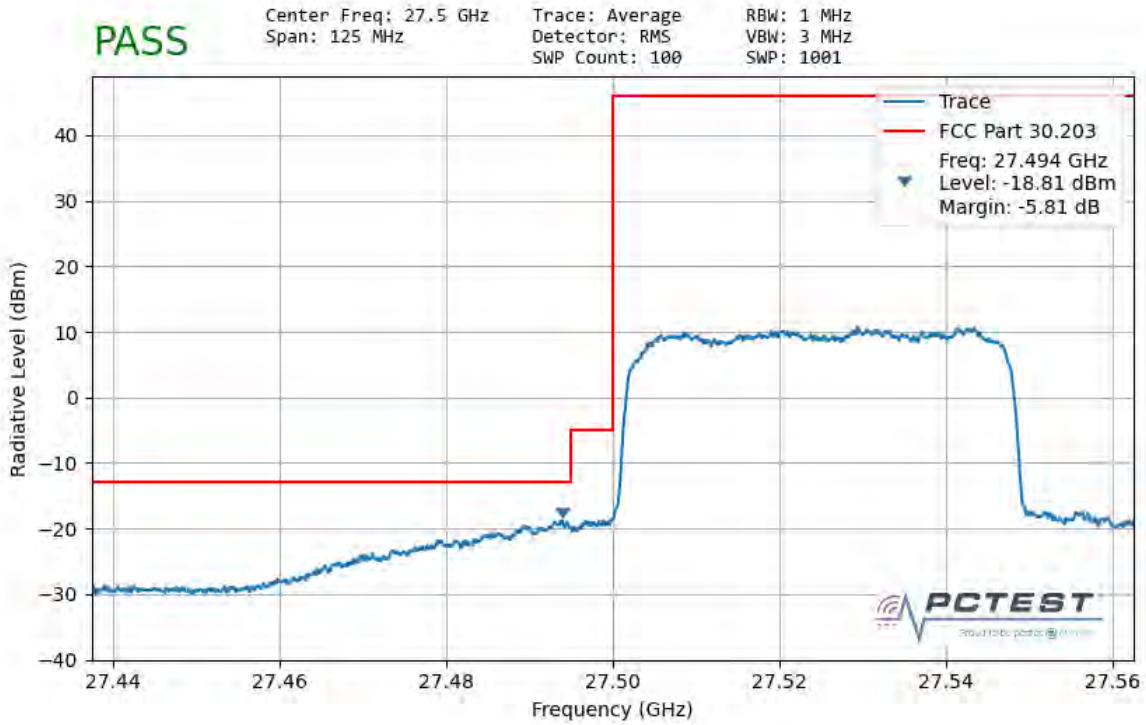


**Plot 7-63. Ant 1 Lower Band Edge (50MHz-1CC – QPSK Full RB)**

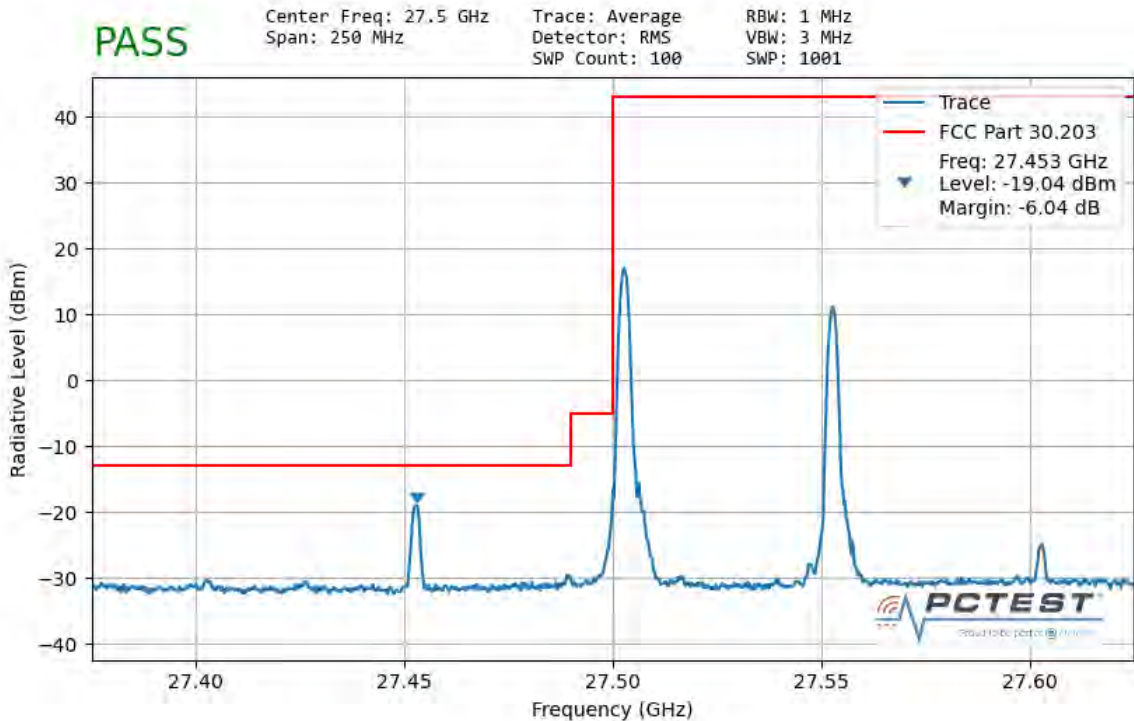


**Plot 7-64. Ant 1 Lower Band Edge (50MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 74 of 97

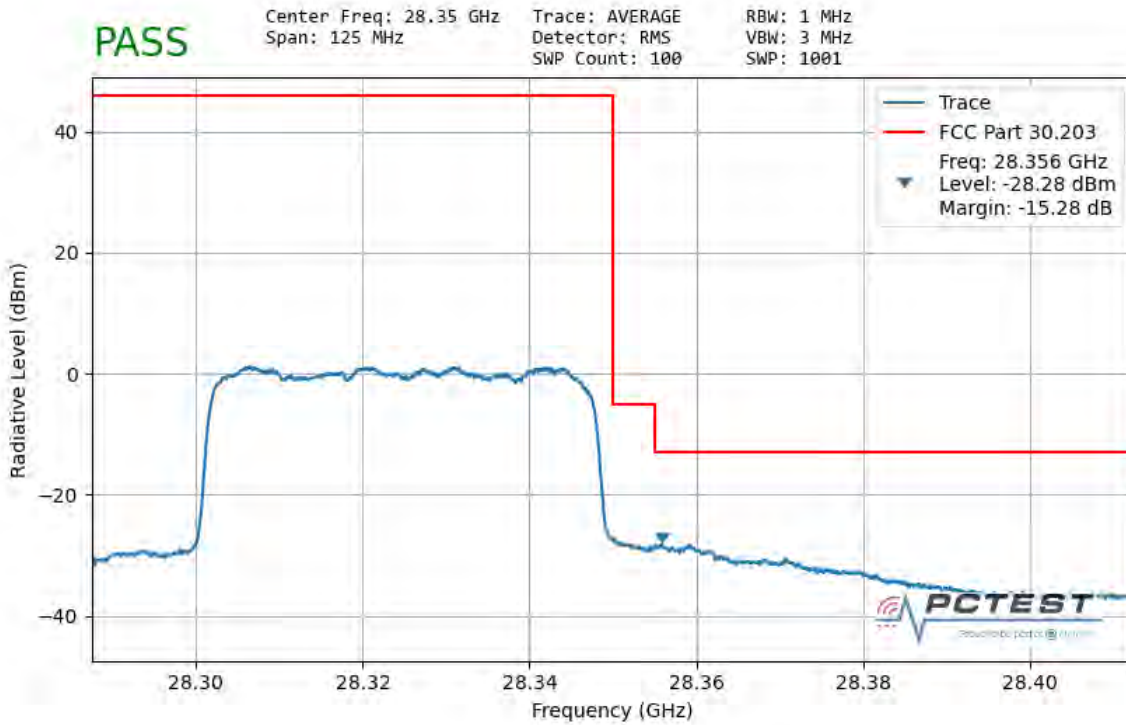


**Plot 7-65. Ant 1 Upper Band Edge (50MHz-1CC – QPSK Full RB)**

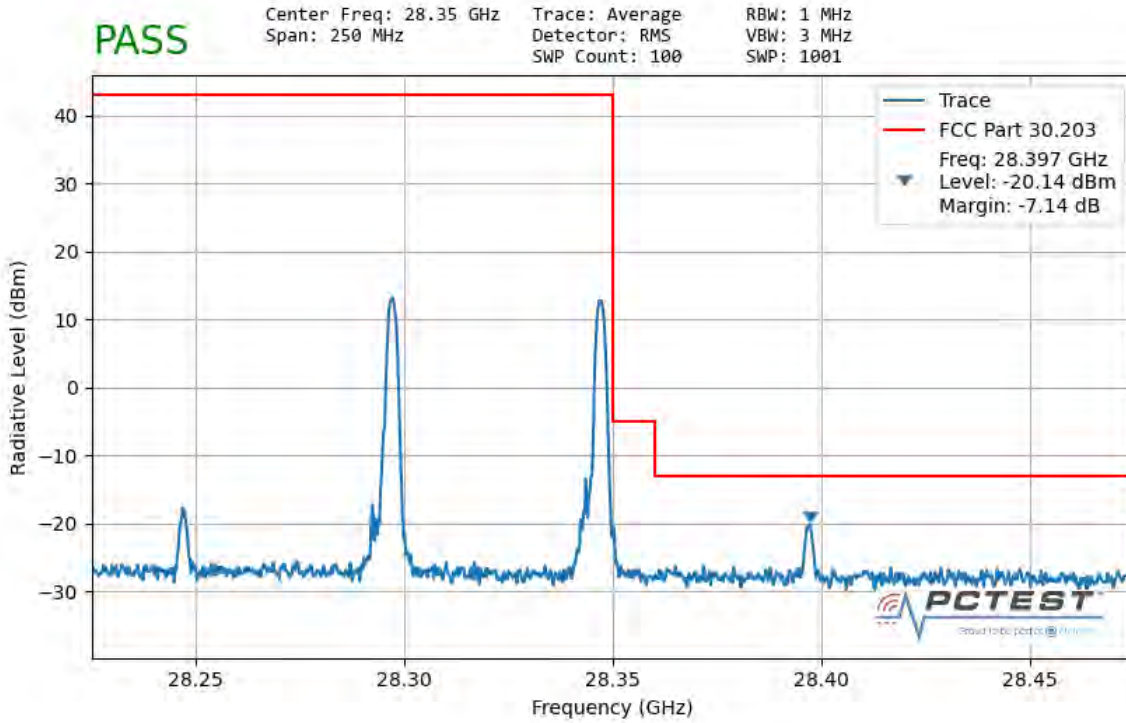


**Plot 7-66. Ant 1 Upper Band Edge (50MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMN981U	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 75 of 97

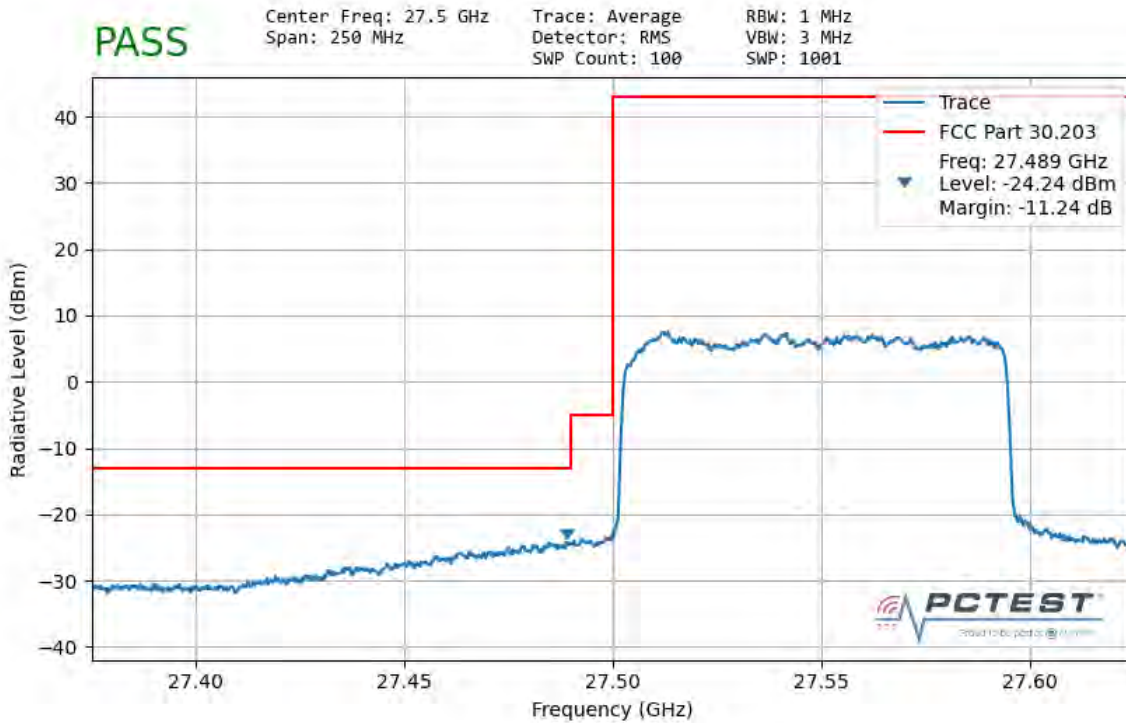


**Plot 7-67. Ant 1 Lower Band Edge (100MHz-1CC – QPSK Full RB)**

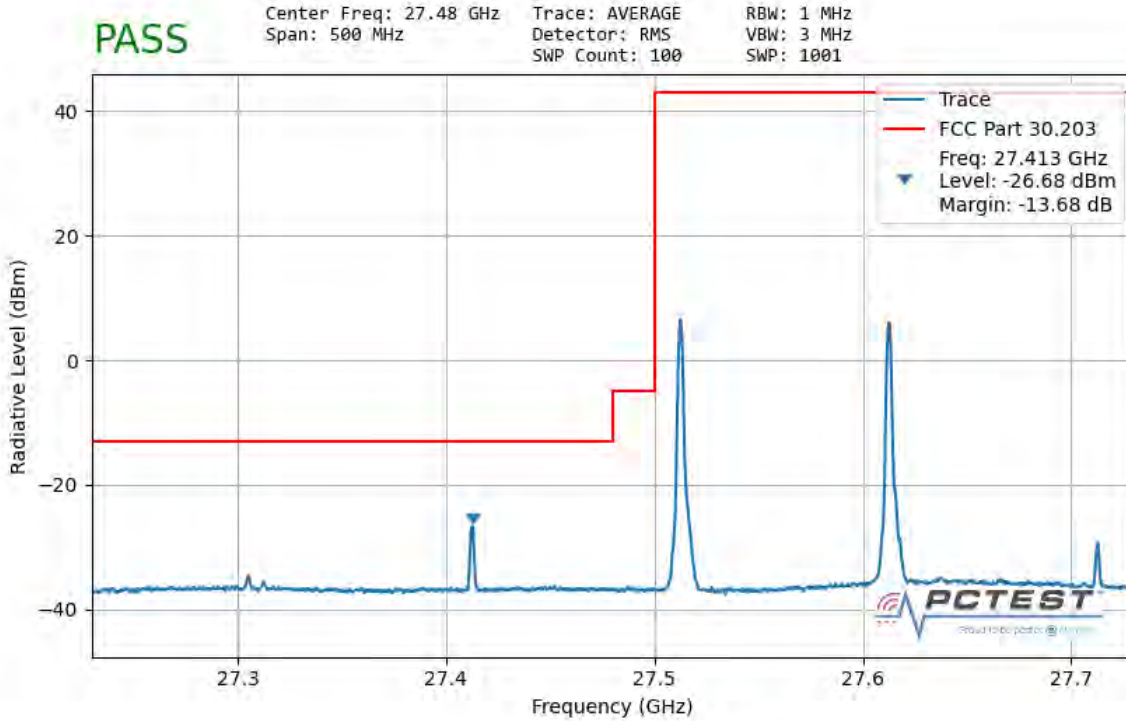


**Plot 7-68. Ant 1 Lower Band Edge (100MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 76 of 97

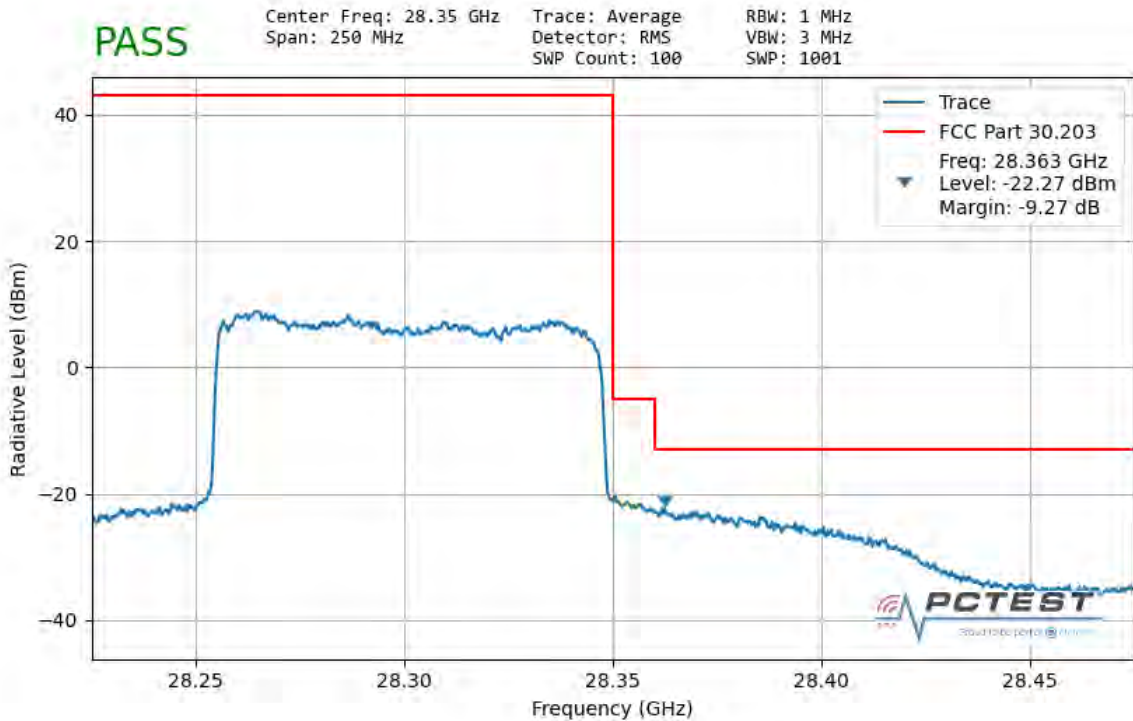


**Plot 7-69. Ant 1 Upper Band Edge (100MHz-1CC – QPSK Full RB)**

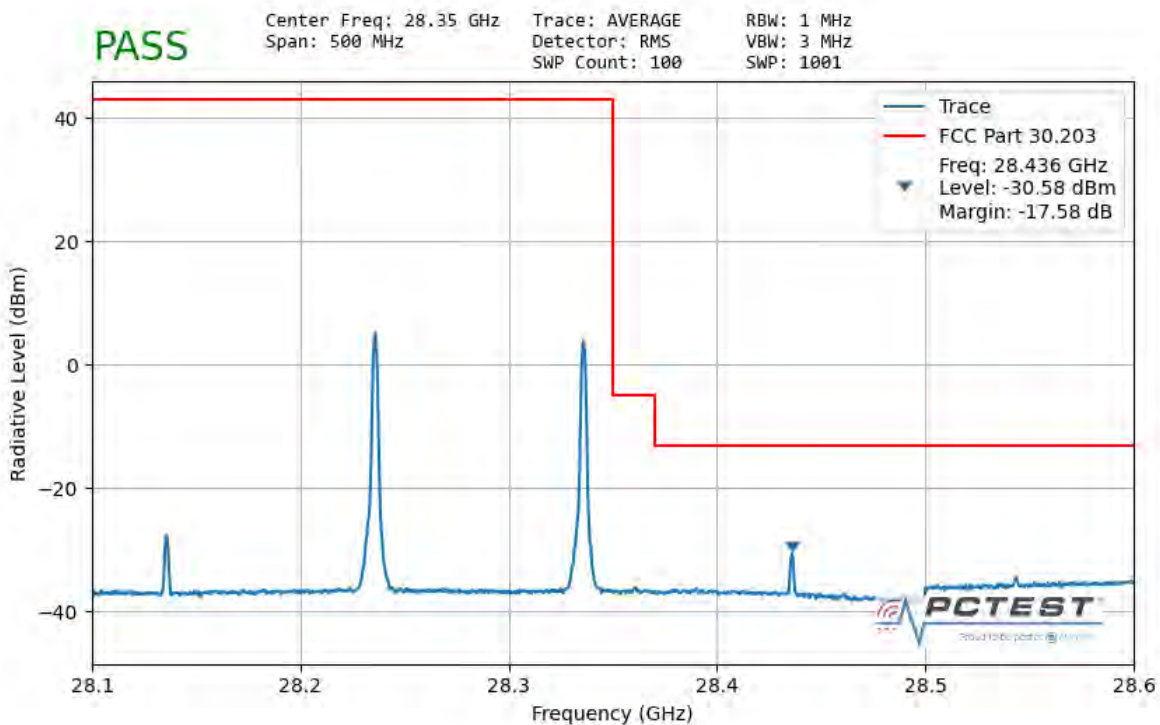


**Plot 7-70. Ant 1 Upper Band Edge (100MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 77 of 97

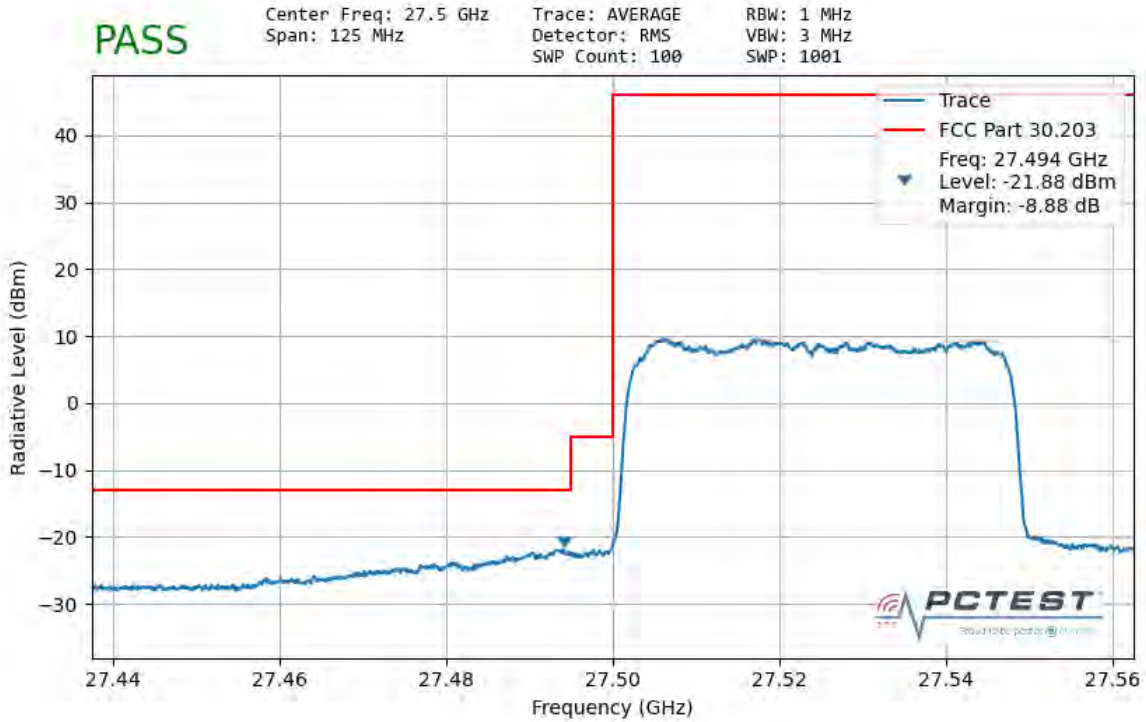


**Plot 7-71. Ant 2 Lower Band Edge (50MHz-1CC – QPSK Full RB)**

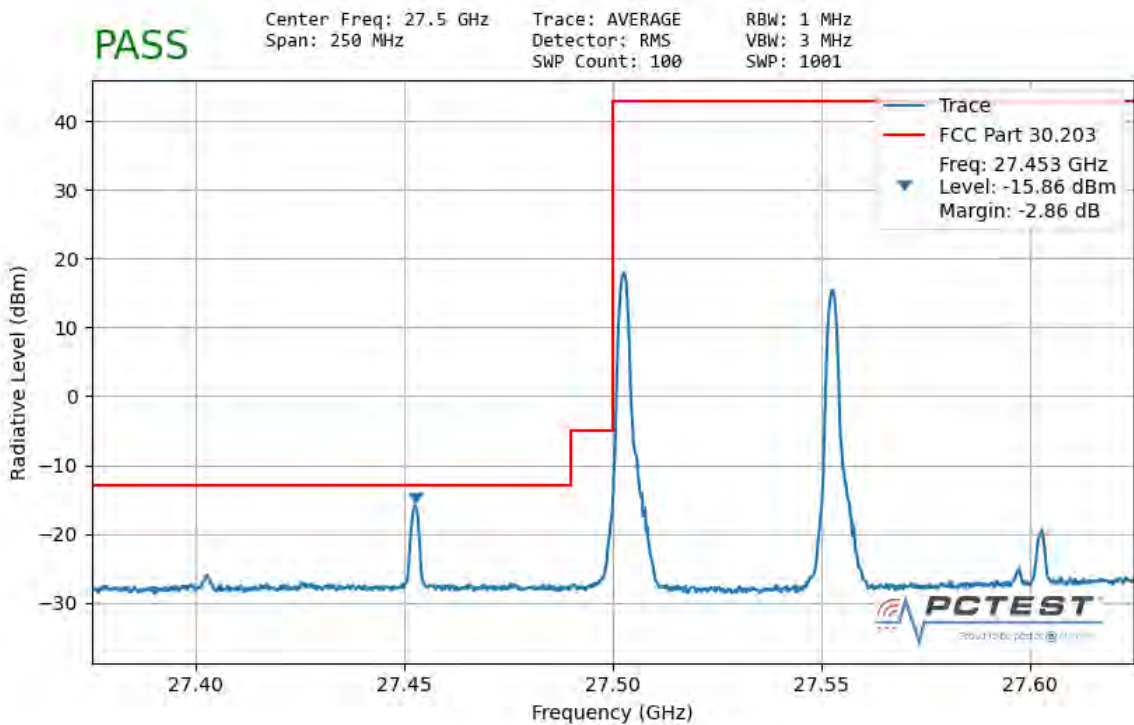


**Plot 7-72. Ant 2 Lower Band Edge (50MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 78 of 97

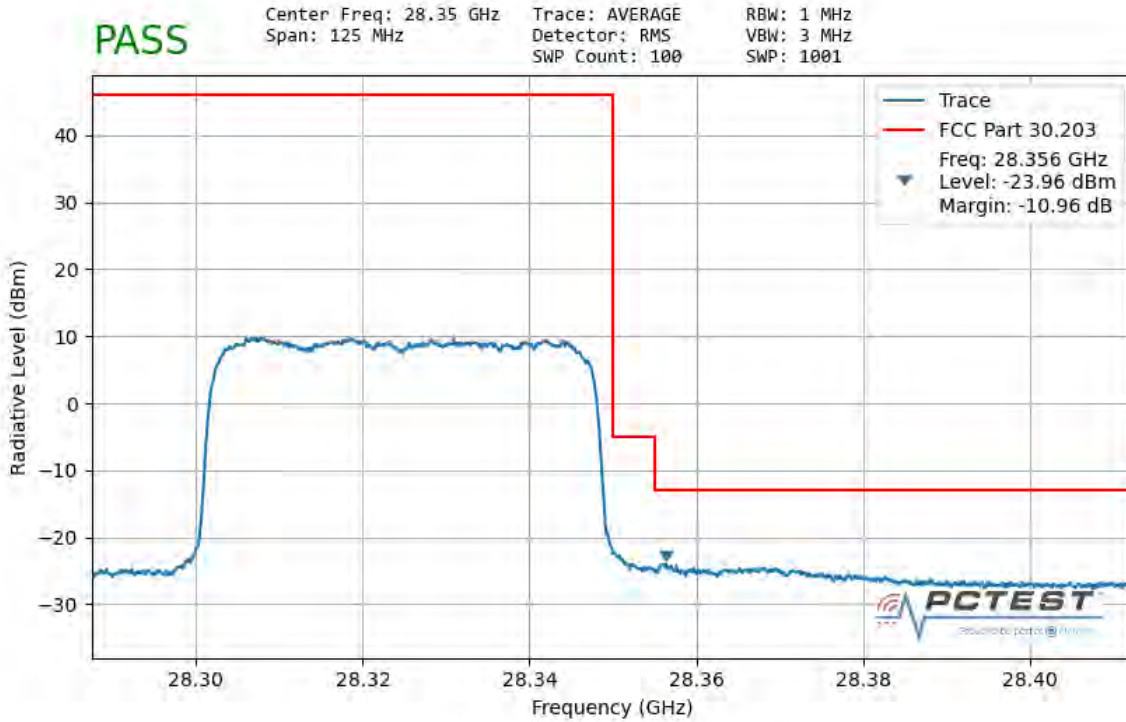


**Plot 7-73. Ant 2 Upper Band Edge (50MHz-1CC – QPSK Full RB)**

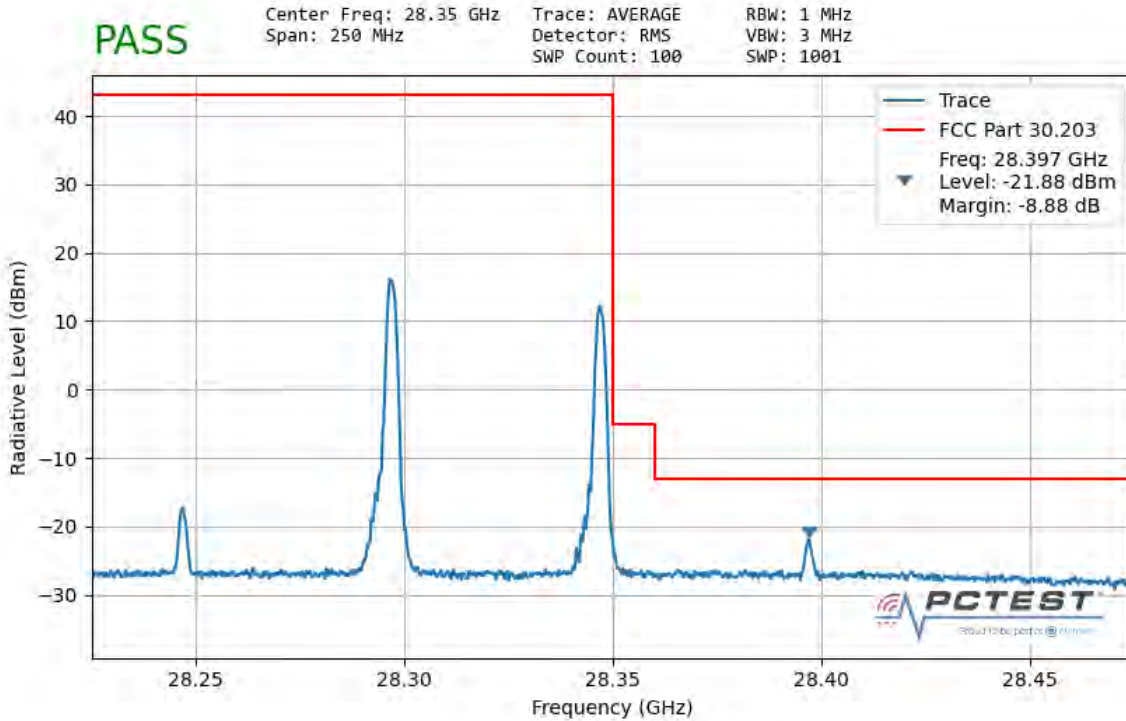


**Plot 7-74. Ant 2 Upper Band Edge (50MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMN981U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 79 of 97

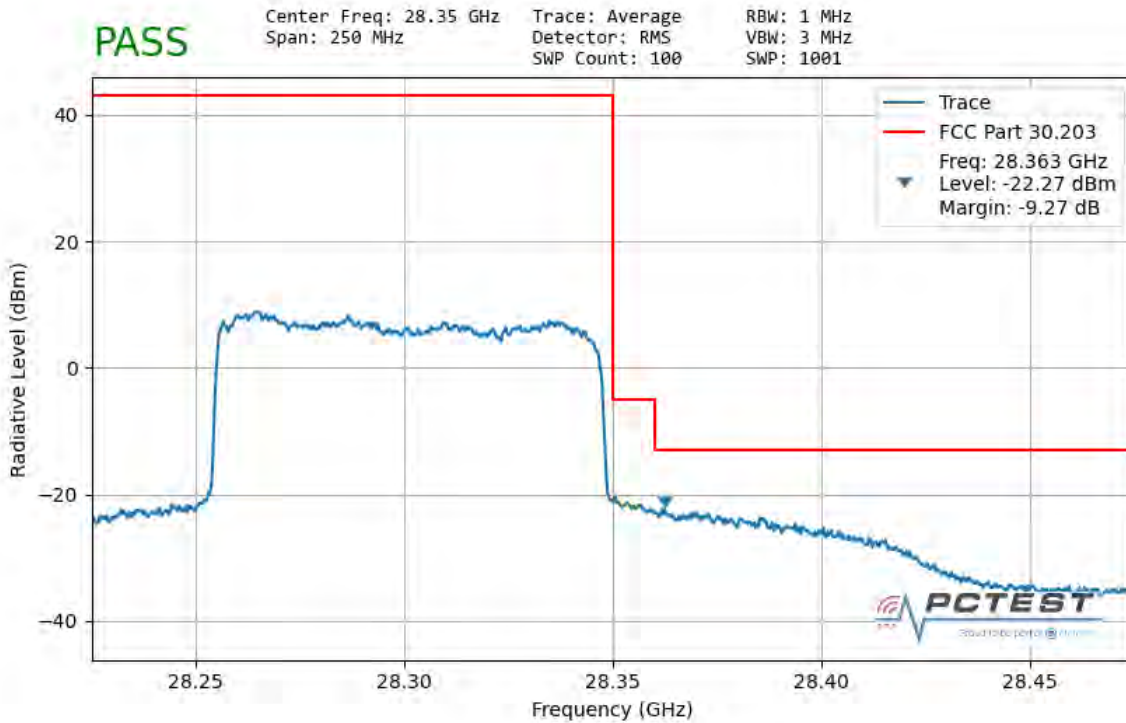


**Plot 7-75. Ant 2 Lower Band Edge (100MHz-1CC – QPSK Full RB)**

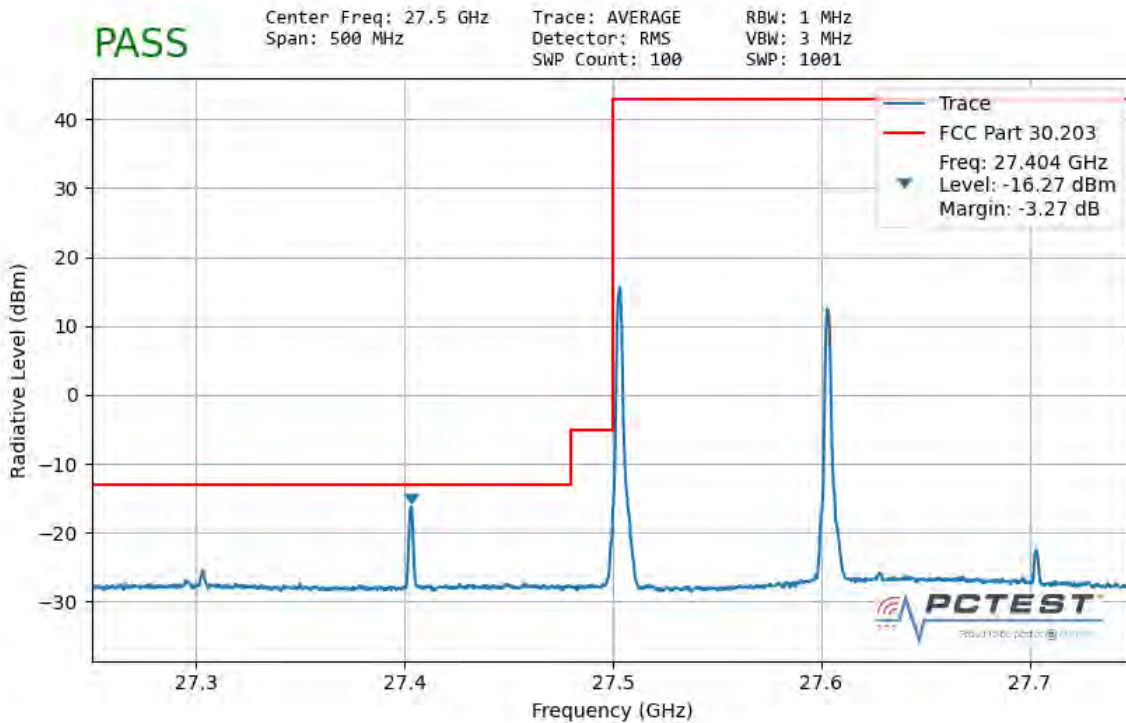


**Plot 7-76. Ant 2 Lower Band Edge (100MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 80 of 97



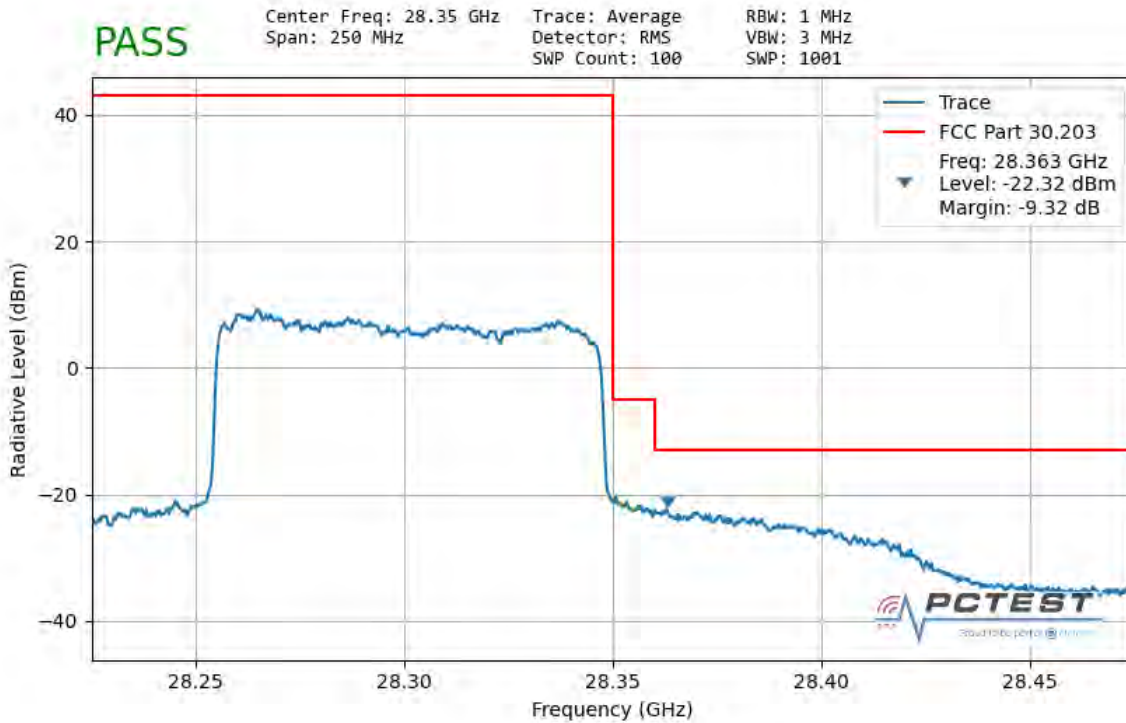


**Plot 7-77. Ant 2 Upper Band Edge (100MHz-1CC – QPSK Full RB)**

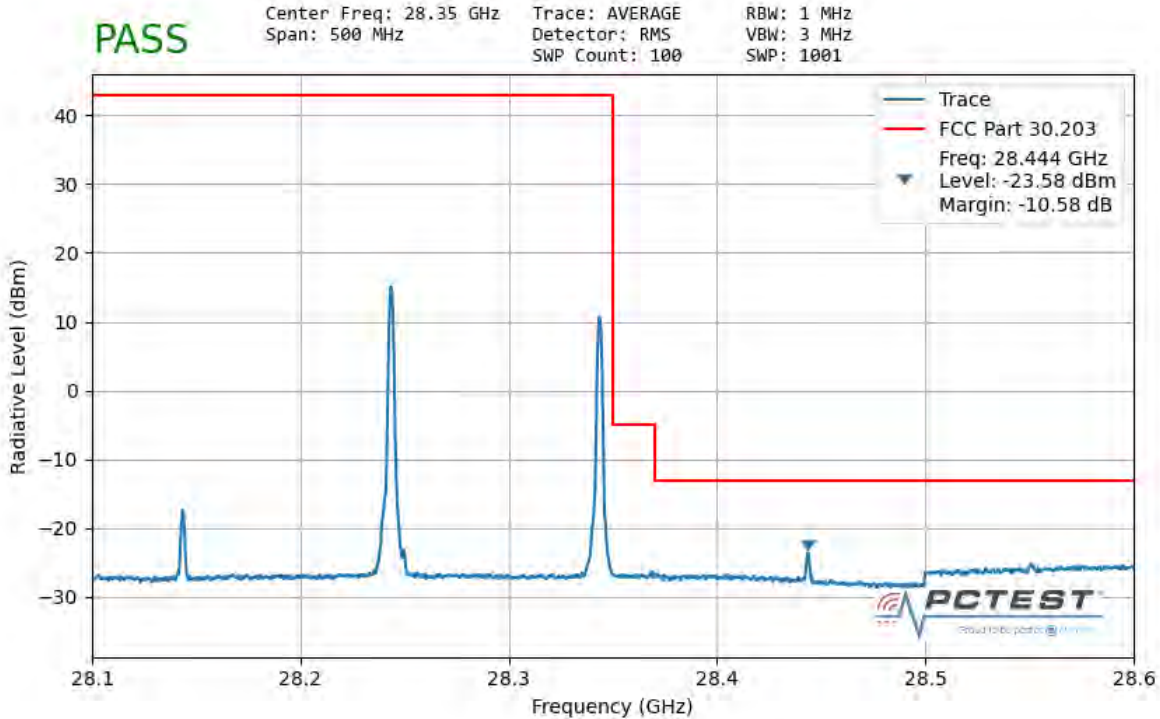


**Plot 7-78. Ant 2 Upper Band Edge (100MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 81 of 97

### Band n260 – Worst Case

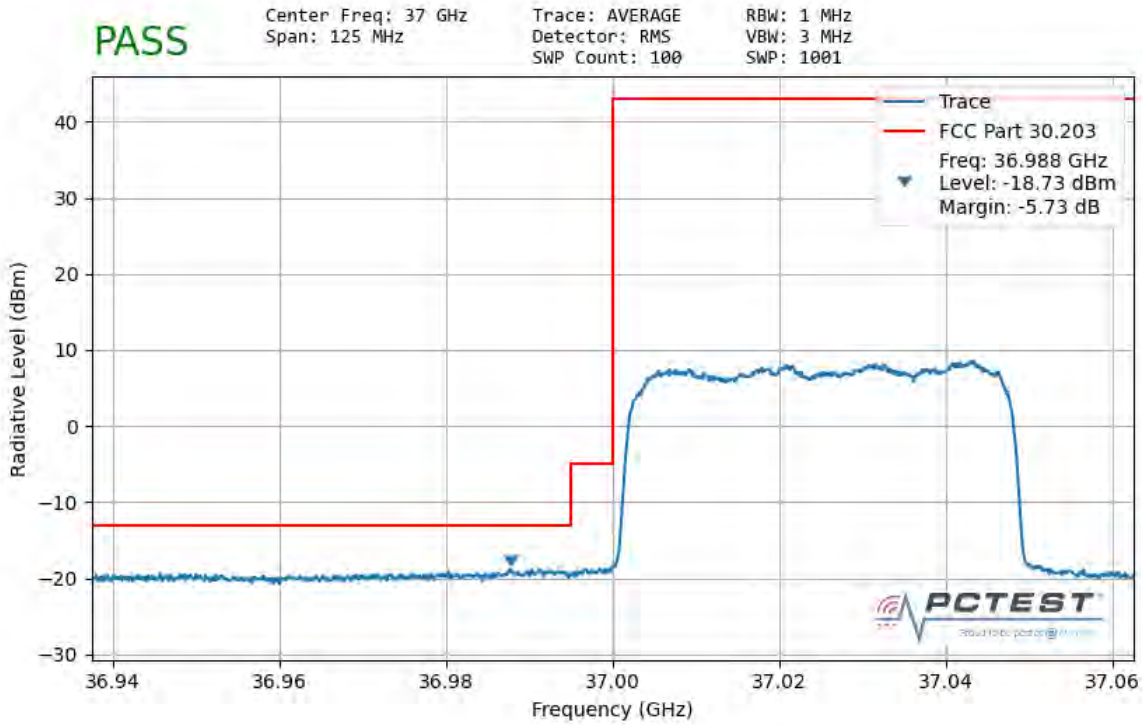


**Plot 7-79. Ant 1 Lower Band Edge (50MHz-1CC – QPSK Full RB)**

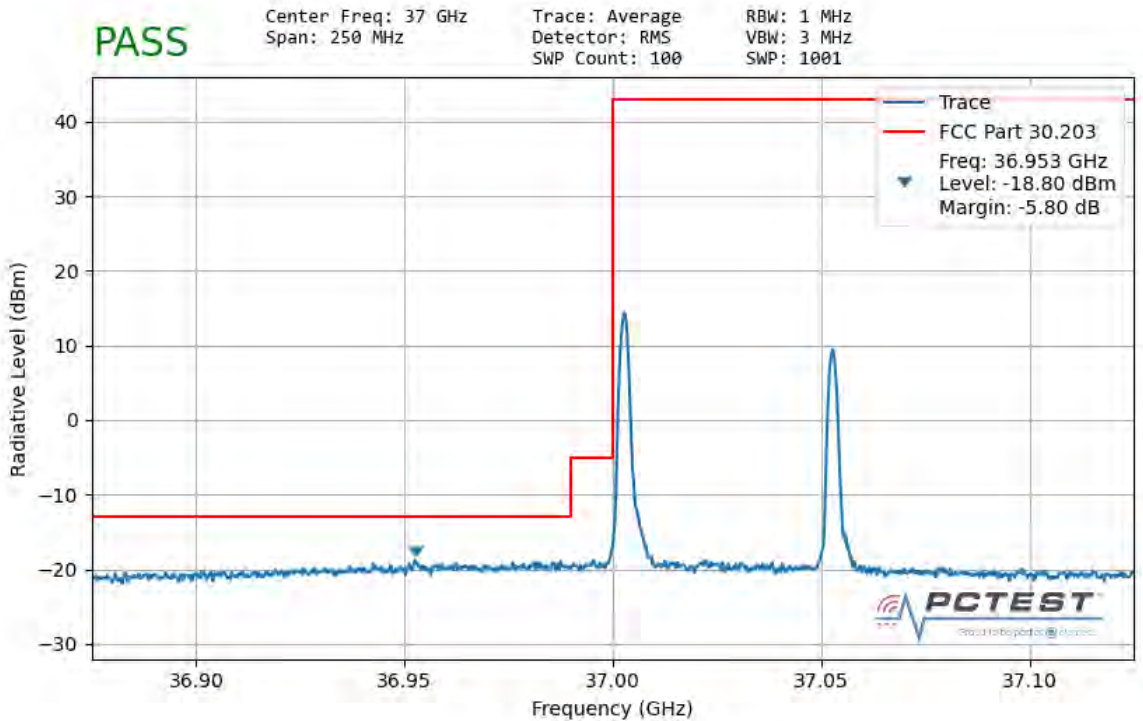


**Plot 7-80. Ant 1 Lower Band Edge (50MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 82 of 97

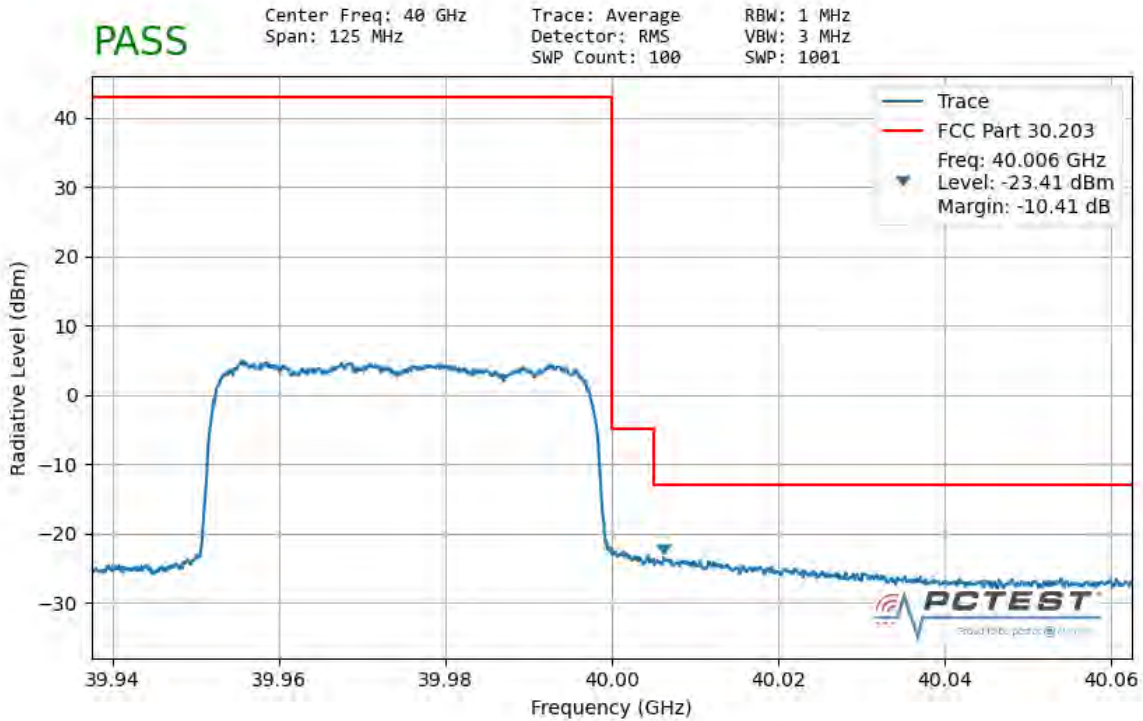


**Plot 7-81. Ant 1 Upper Band Edge (50MHz-1CC – QPSK Full RB)**

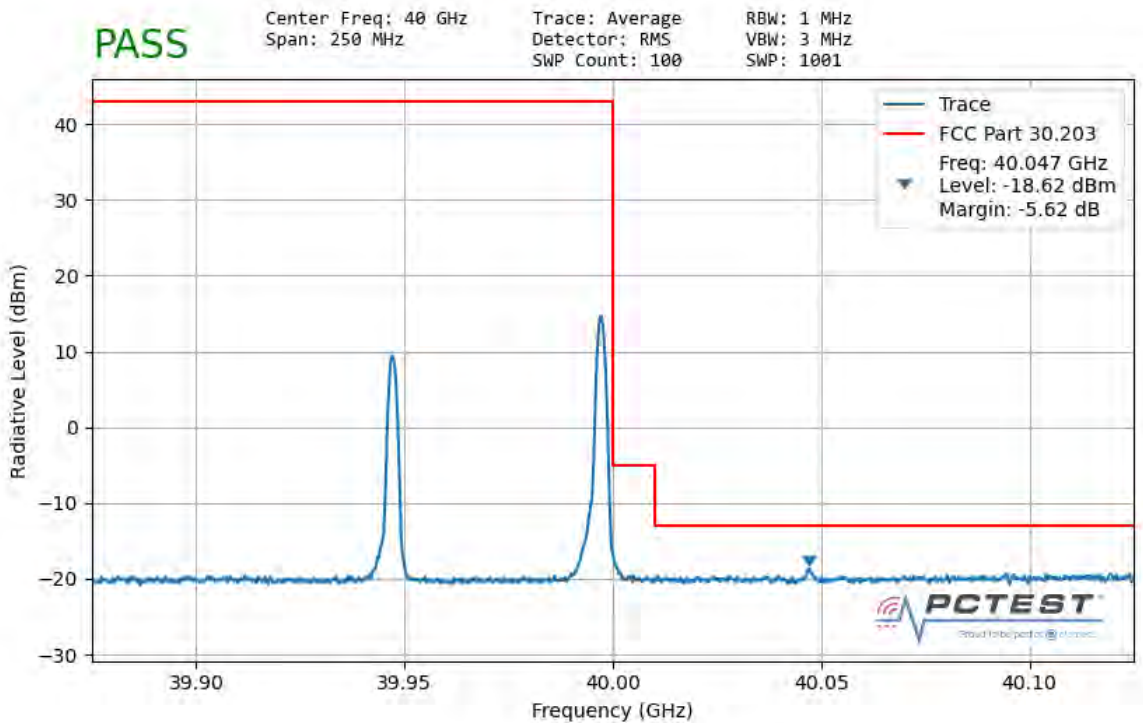


**Plot 7-82. Ant 1 Upper Band Edge (50MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMN981U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 83 of 97

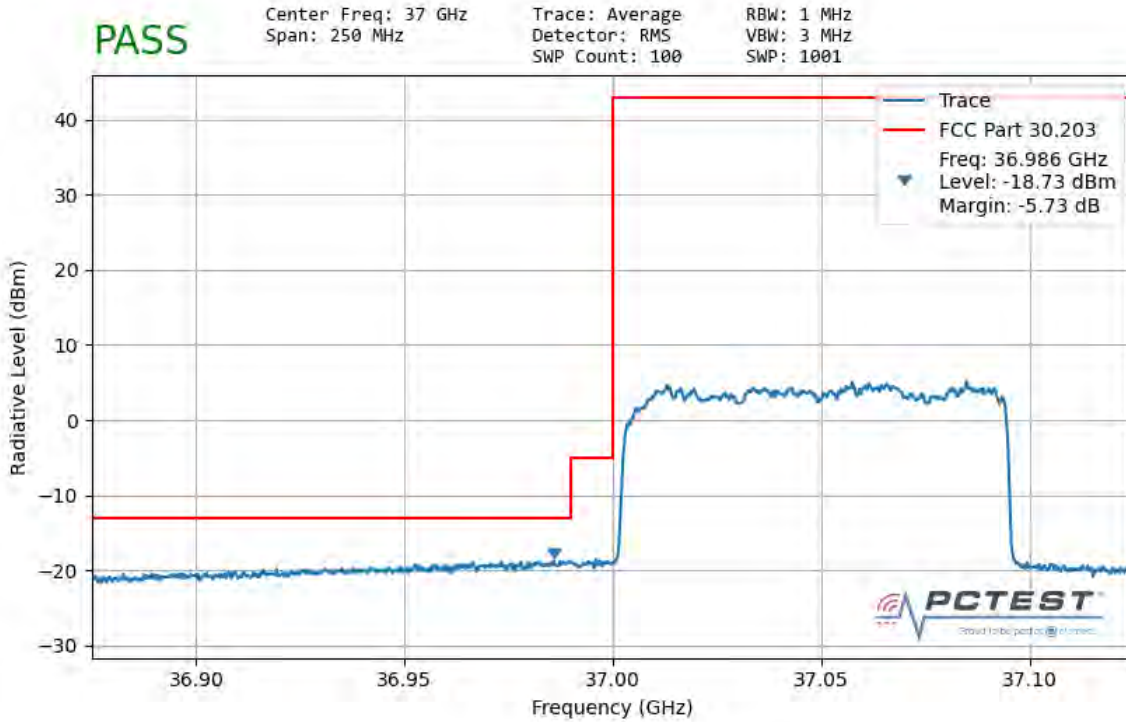


**Plot 7-83. Ant 1 Lower Band Edge (100MHz-1CC – QPSK Full RB)**

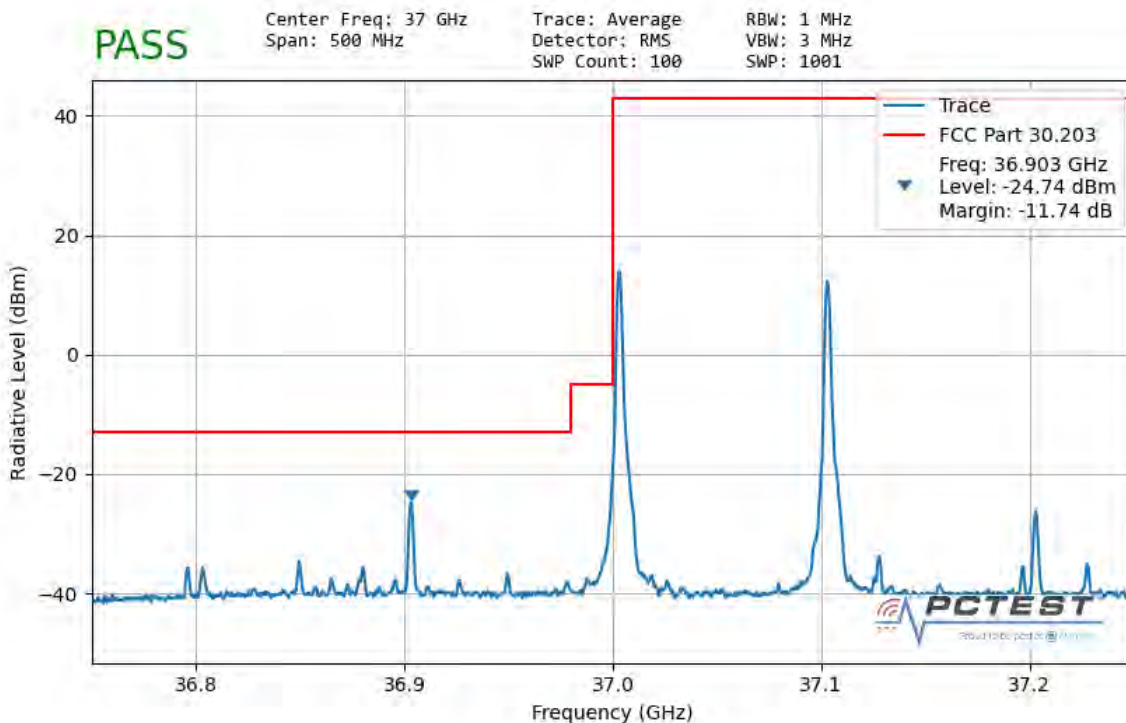


**Plot 7-84. Ant 1 Lower Band Edge (100MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMN981U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 84 of 97

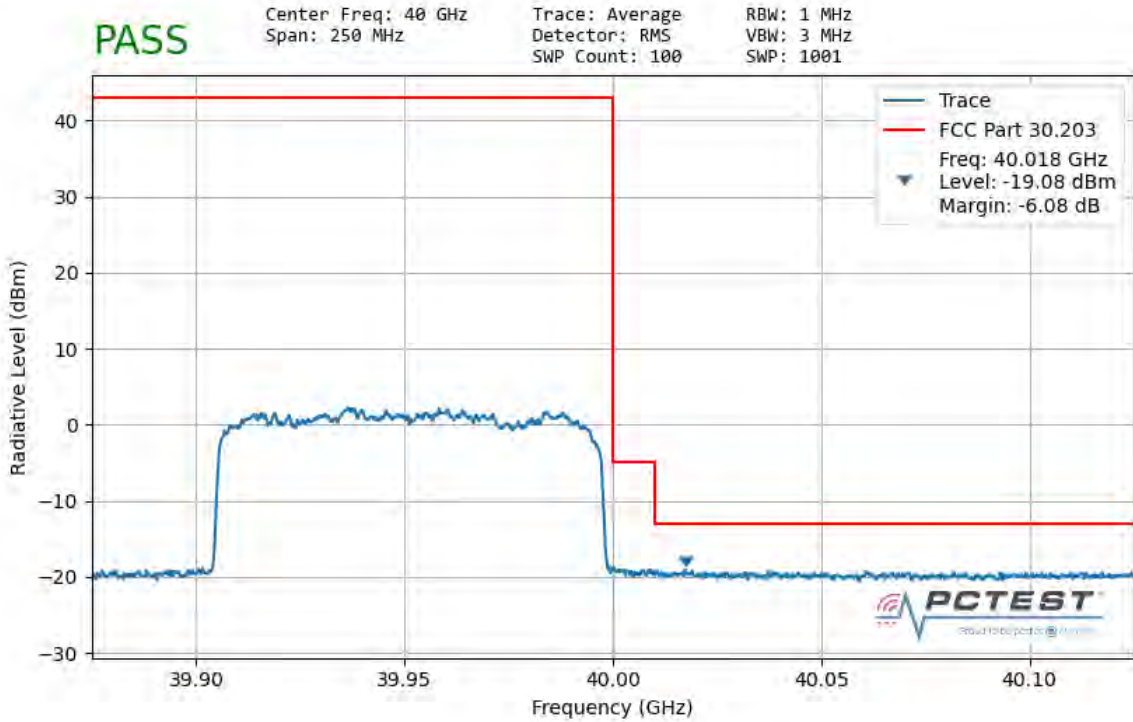


**Plot 7-85. Ant 1 Upper Band Edge (100MHz-1CC – QPSK Full RB)**

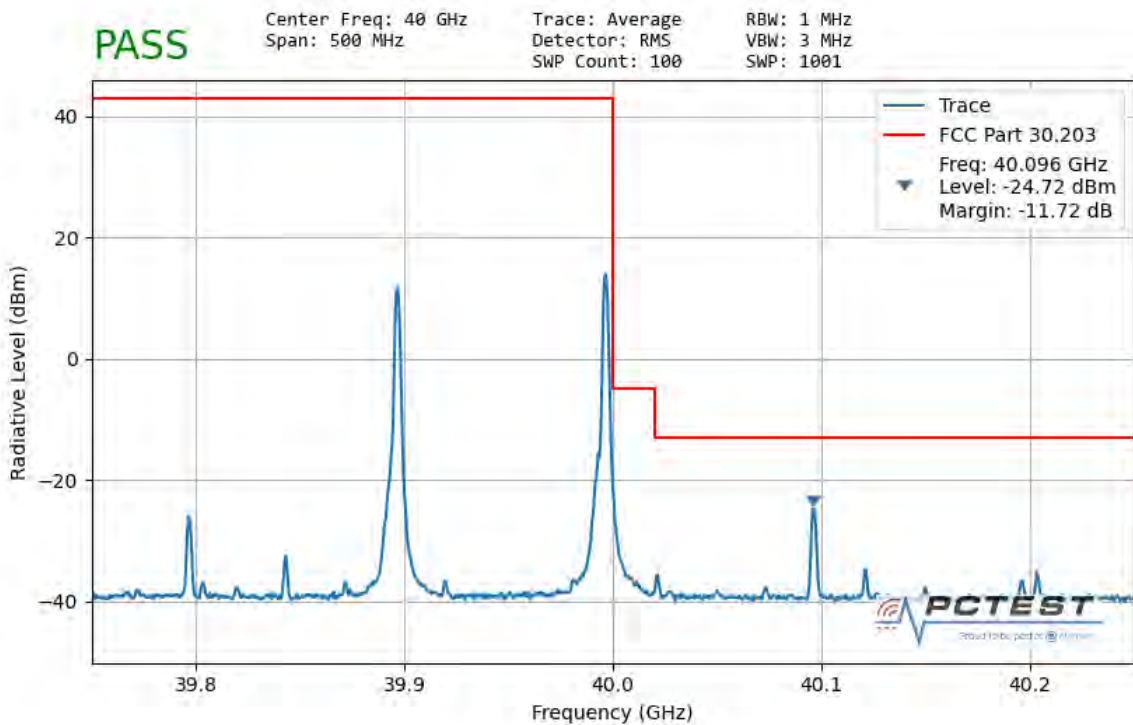


**Plot 7-86. Ant 1 Upper Band Edge (100MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMN981U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 85 of 97

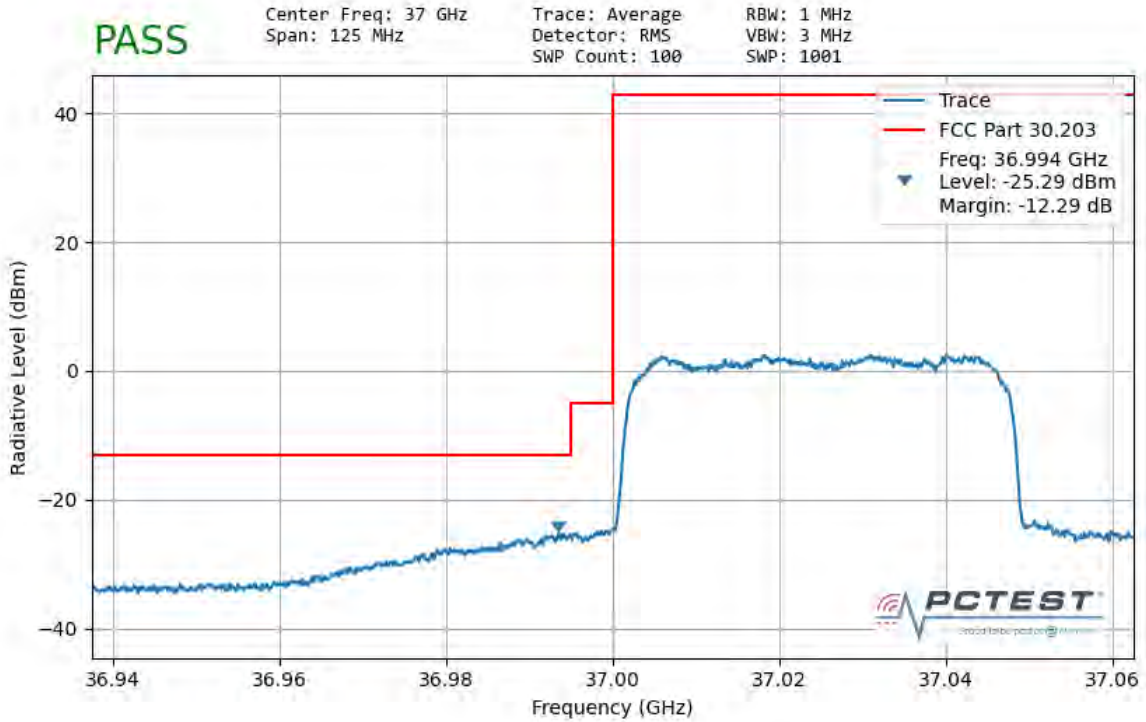


**Plot 7-87. Ant 2 Lower Band Edge (50MHz-1CC – QPSK Full RB)**

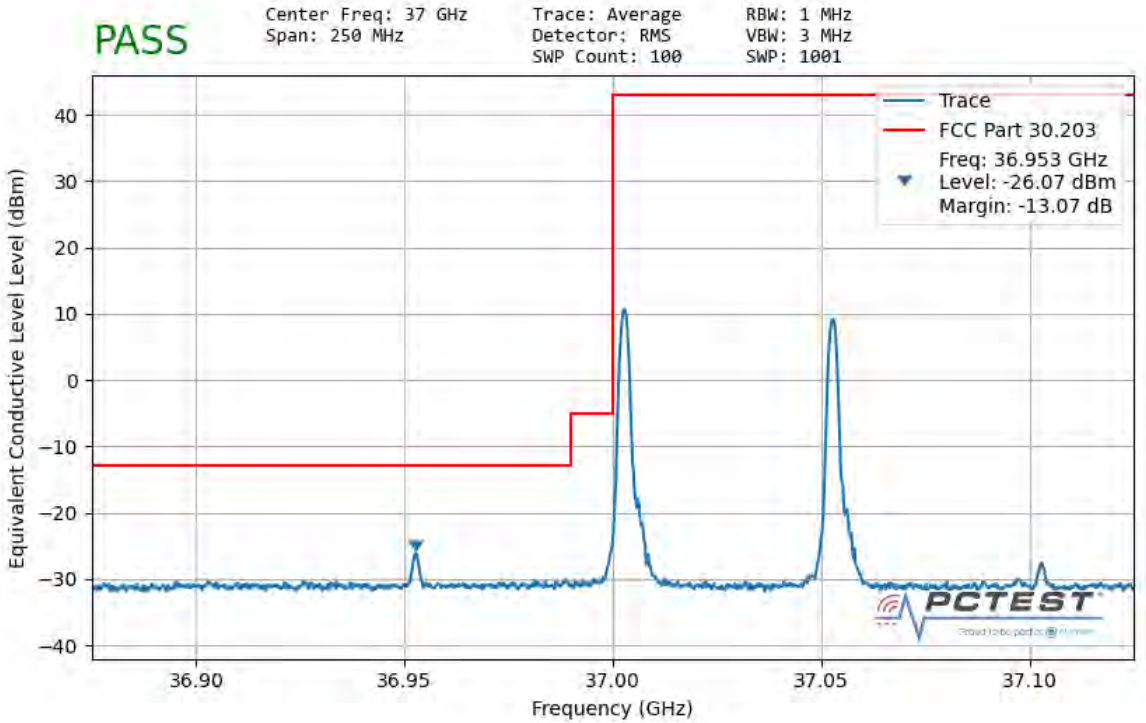


**Plot 7-88. Ant 2 Lower Band Edge (50MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMN981U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 86 of 97

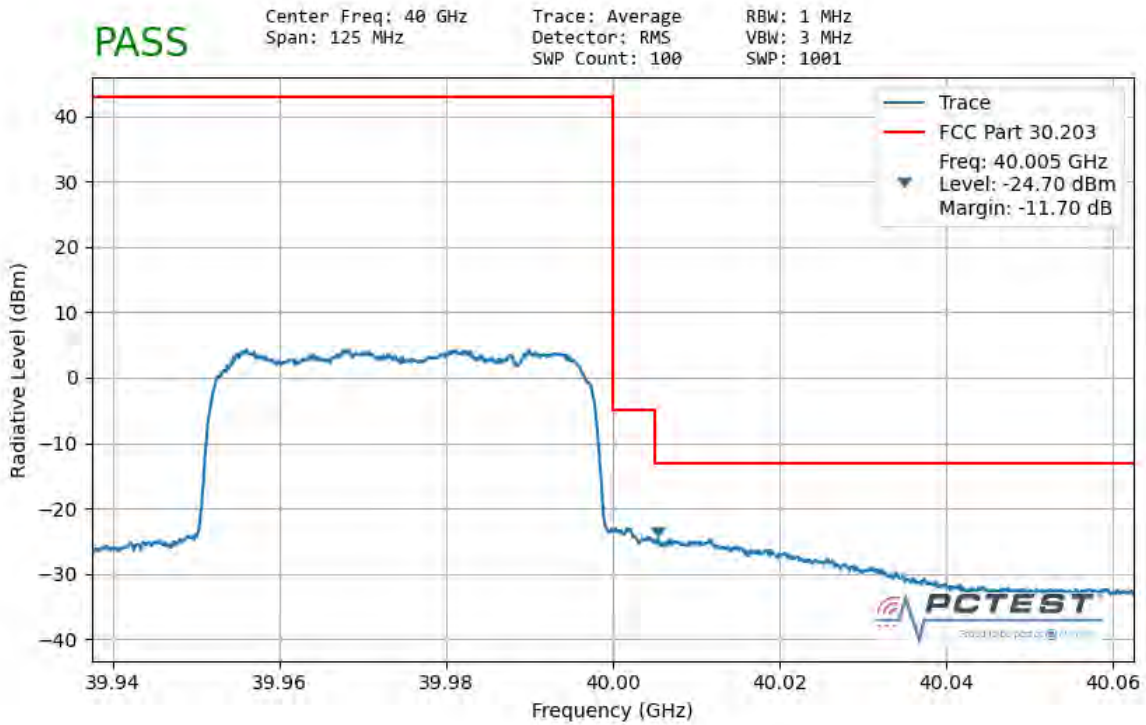


**Plot 7-89. Ant 2 Upper Band Edge (50MHz-1CC – QPSK Full RB)**

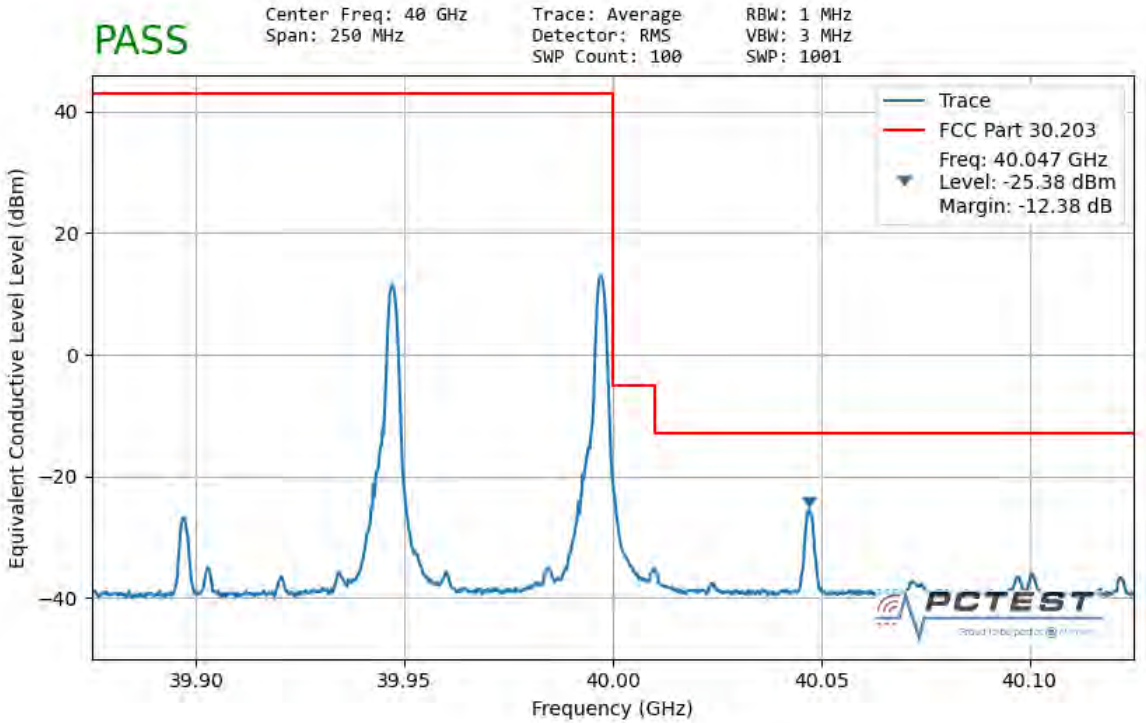


**Plot 7-90. Ant 2 Upper Band Edge (50MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMN981U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 87 of 97

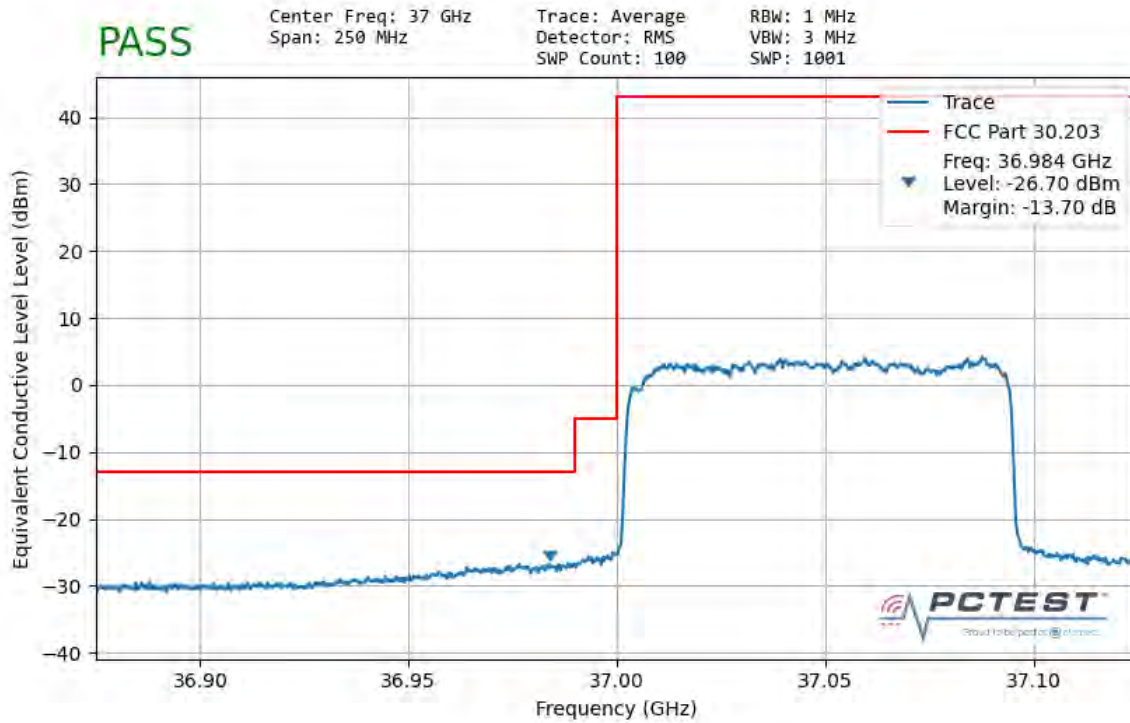


**Plot 7-91. Ant 2 Lower Band Edge (100MHz-1CC – QPSK Full RB)**

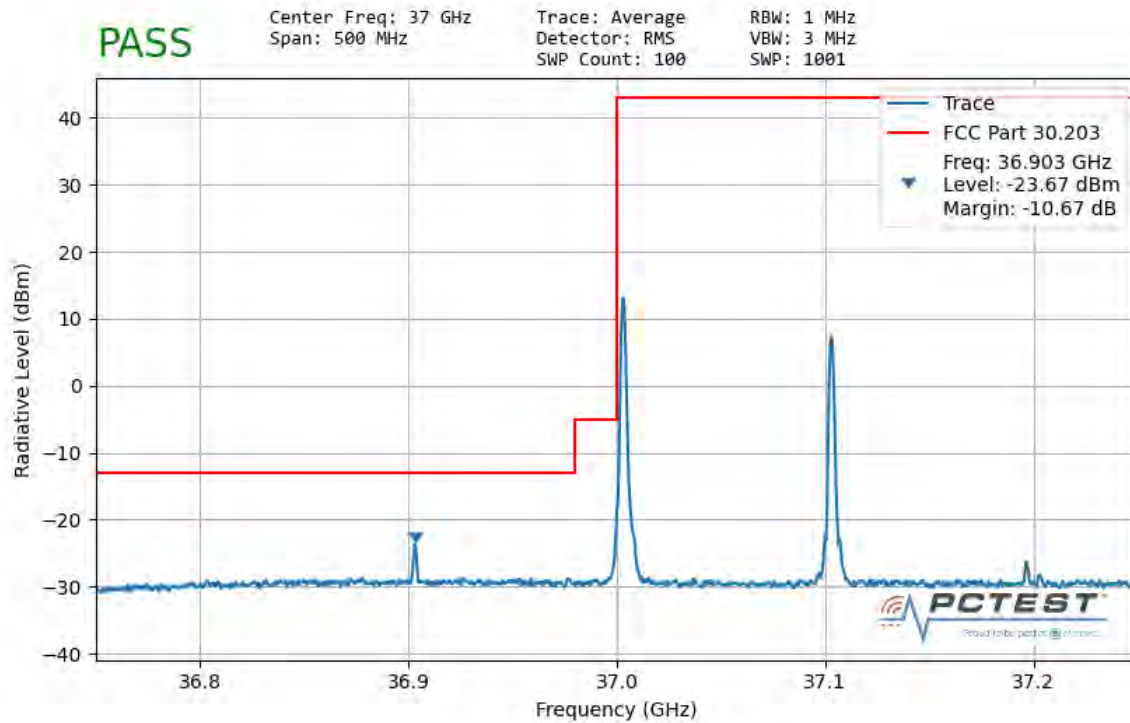


**Plot 7-92. Ant 2 Lower Band Edge (100MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 88 of 97



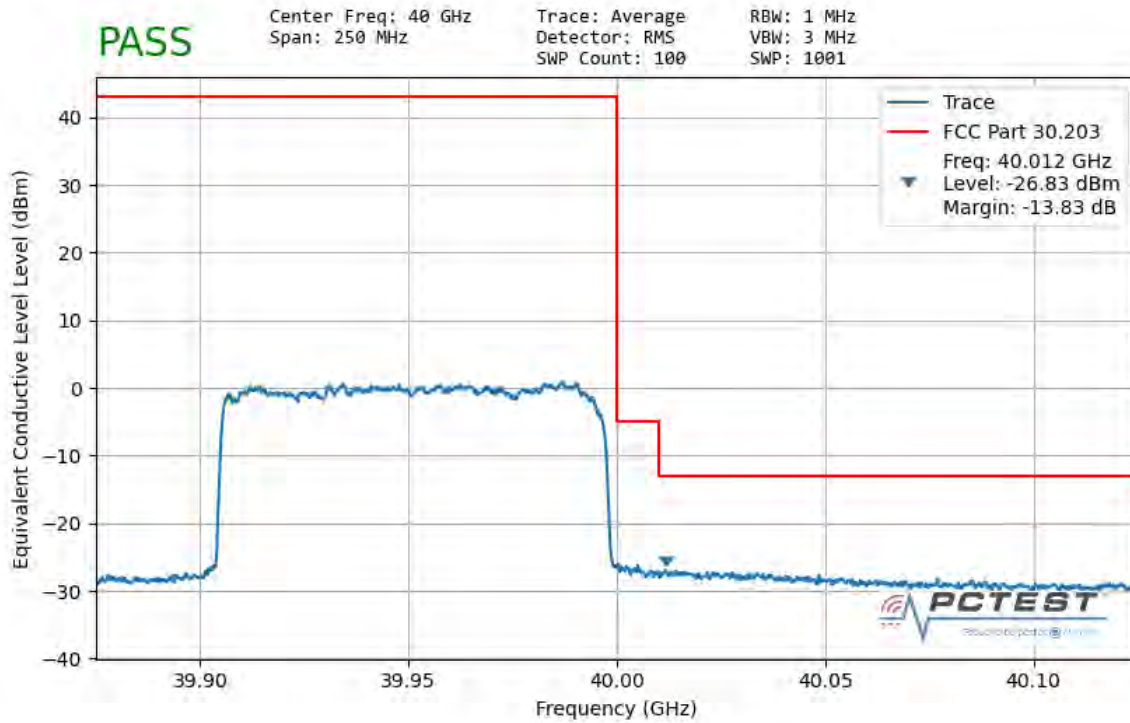

**Plot 7-93. Ant 2 Upper Band Edge (100MHz-1CC – QPSK Full RB)**

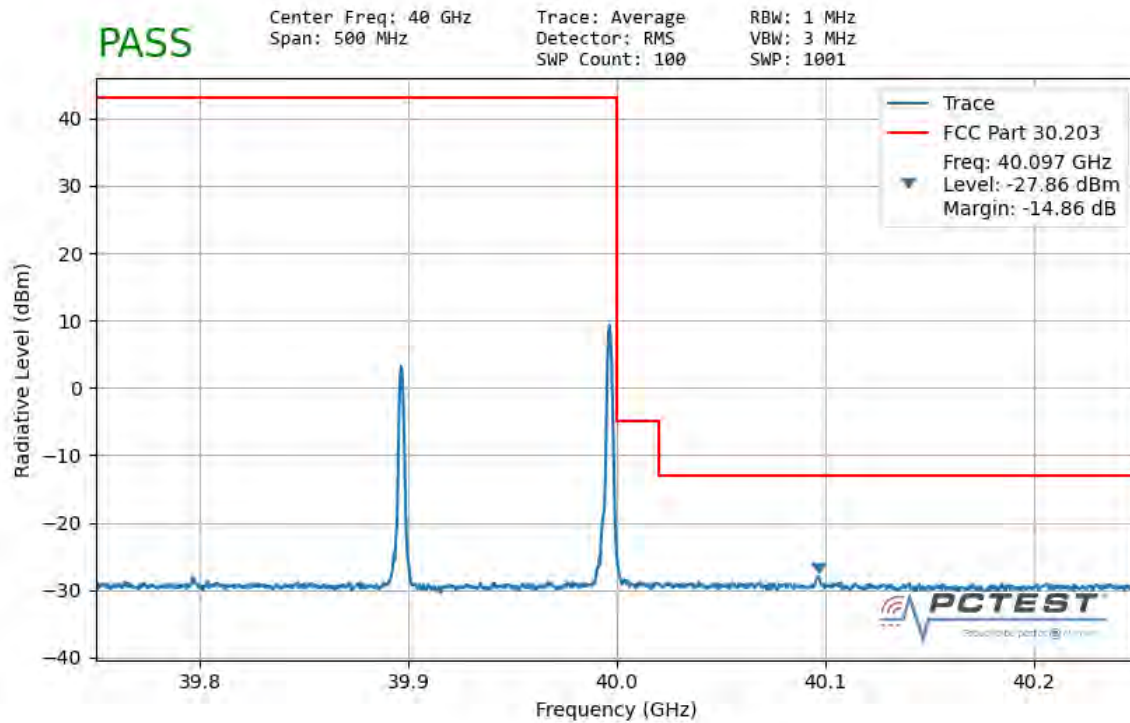

**Plot 7-94. Ant 2 Upper Band Edge (100MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 89 of 97

## 7.6 Frequency Stability / Temperature Variation

### §2.1055

#### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

#### Test Procedure Used

ANSI C63.5-2015 Section 5.6  
KDB 842590 D01 v01r01 Section 4.5

#### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

#### Test Setup

The EUT was measured using horn antenna connected to a spectrum analyzer. The EUT was placed inside an environmental chamber. Using a foam plug, the horn antenna measured the frequency of the fundamental signal.

#### Test Notes

The Frequency Deviation column in the table below is the amount of deviation measured from the center frequency of the Reference measurement (first row).

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 90 of 97

## Frequency Stability Measurements (Band n261)

§2.1055

OPERATING FREQUENCY: 27,924,960,000 Hz  
 CHANNEL: 2077915  
 REFERENCE VOLTAGE: 4.21 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.21	+ 20 (Ref)	27,924,955,000	0	0.0000000
100 %		- 30	27,923,360,000	1,595,000	0.0057117
100 %		- 20	27,923,857,000	1,098,000	0.0039320
100 %		- 10	27,922,987,000	1,968,000	0.0070475
100 %		0	27,924,780,000	175,000	0.0006267
100 %		+ 10	27,915,237,000	9,718,000	0.0348004
100 %		+ 20	27,924,350,000	605,000	0.0021665
100 %		+ 30	27,920,358,000	4,597,000	0.0164620
100 %		+ 40	27,926,584,000	-1,629,000	-0.0058335
100 %		+ 50	27,930,872,000	-5,917,000	-0.0211889
BATT. ENDPOINT	2.84	+ 20	27,921,691,000	3,264,000	0.0116885


Table 7-55. Frequency Stability Data (n261)

**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 91 of 97

**Frequency Stability Measurements (Band n261)**  
**\$2.1055**

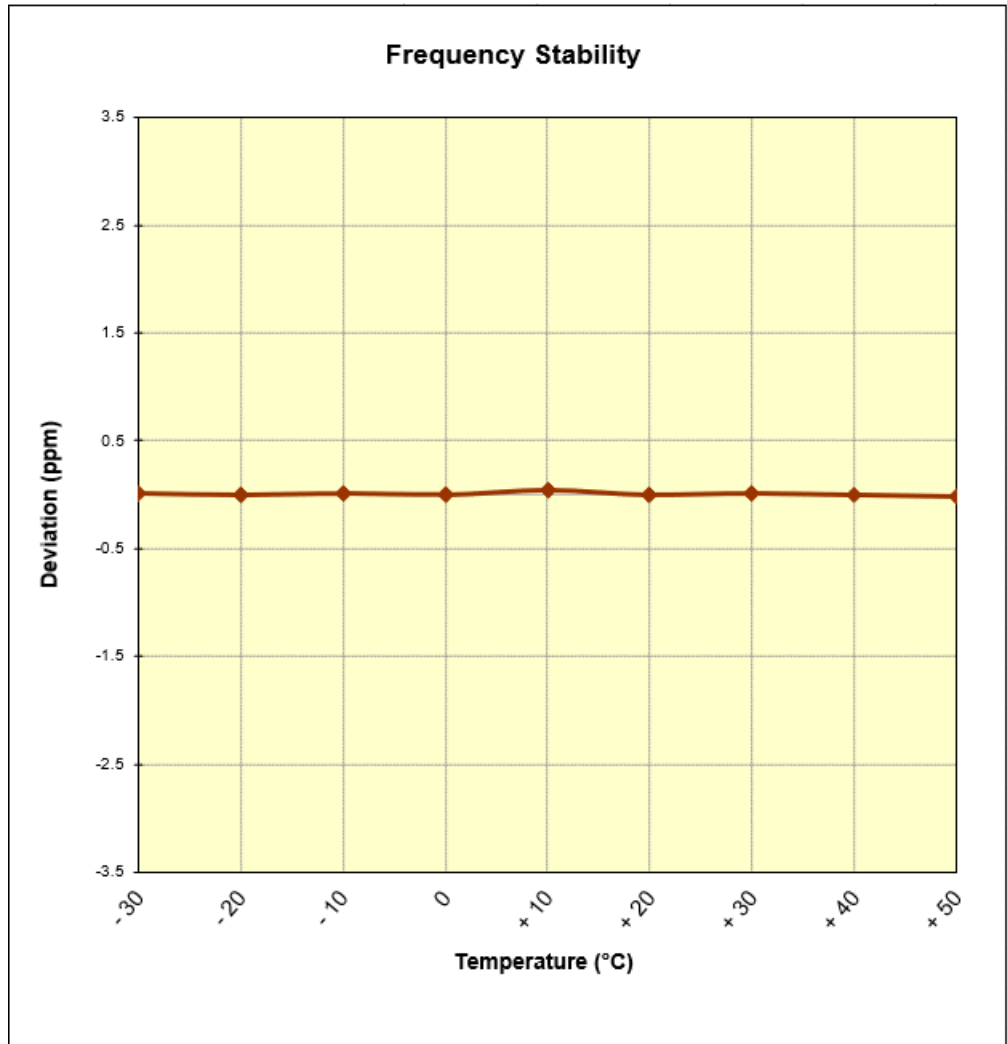

**Figure 7-1. Frequency Stability Graph (n261)**

<b>FCC ID:</b> A3LSMN981U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M2005050081-06-R1.A3L	<b>Test Dates:</b> 5/5/2020-7/08/2020	<b>EUT Type:</b> Portable Handset	Page 92 of 97

## Frequency Stability Measurements (Band n260)

§2.1055

OPERATING FREQUENCY: 38,499,960,000 Hz  
 CHANNEL: 2254165  
 REFERENCE VOLTAGE: 4.21 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.21	+ 20 (Ref)	38,499,960,000	0	0.0000000
100 %		- 30	38,487,520,000	12,440,000	0.0323117
100 %		- 20	38,496,531,000	3,429,000	0.0089065
100 %		- 10	38,499,942,000	18,000	0.0000468
100 %		0	38,493,260,000	6,700,000	0.0174026
100 %		+ 10	38,489,273,000	10,687,000	0.0277585
100 %		+ 20	38,492,531,000	7,429,000	0.0192961
100 %		+ 30	38,495,731,000	4,229,000	0.0109844
100 %		+ 40	38,507,264,000	-7,304,000	-0.0189714
100 %		+ 50	38,512,036,000	-12,076,000	-0.0313663
BATT. ENDPOINT	2.84	+ 20	38,498,980,000	980,000	0.0025455


Table 7-56. Frequency Stability Data (n260)

**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 93 of 97

**Frequency Stability Measurements (Band n260)**  
**§2.1055**

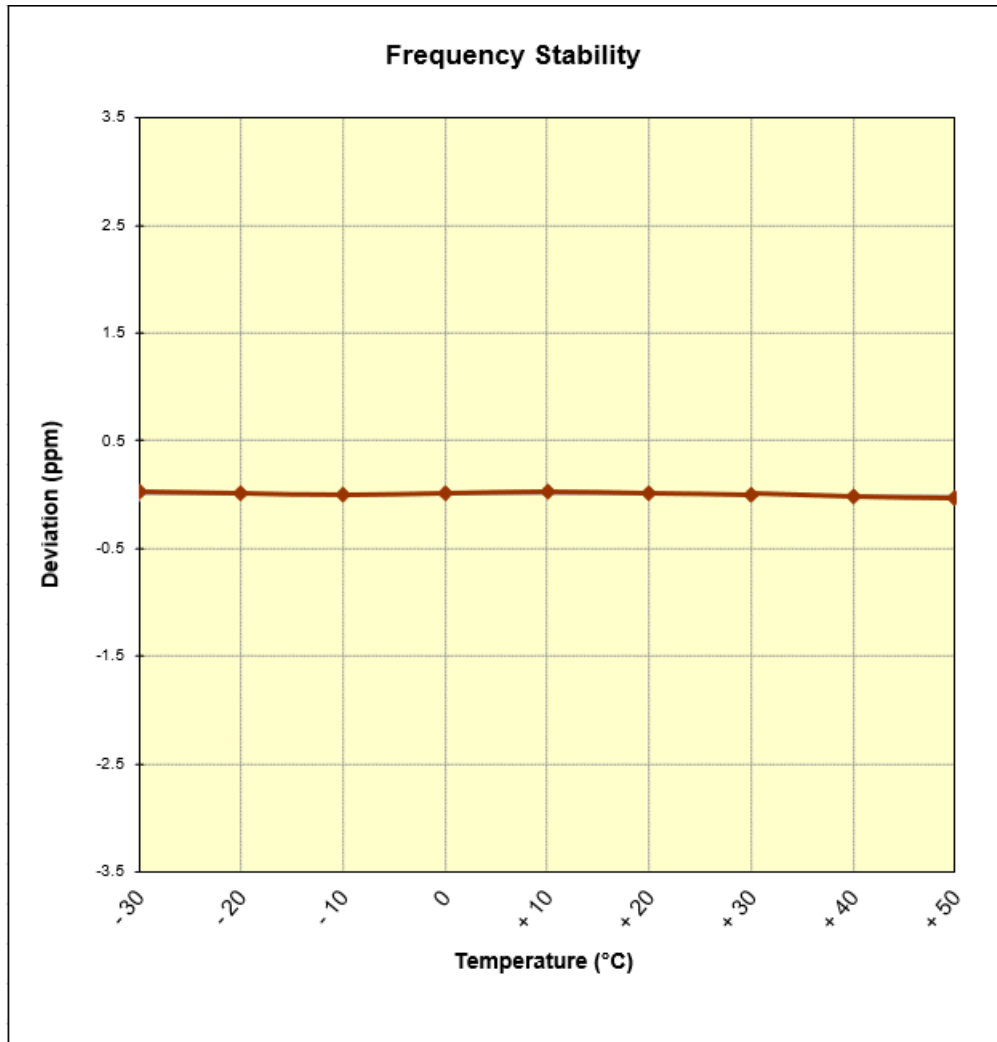

**Figure 7-2. Frequency Stability Graph (n260)**

<b>FCC ID:</b> A3LSMN981U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	 <b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M2005050081-06-R1.A3L	<b>Test Dates:</b> 5/5/2020-7/08/2020	<b>EUT Type:</b> Portable Handset	Page 94 of 97

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMN981U** complies with all the requirements of Part 30.

FCC ID: A3LSMN981U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	 <b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M2005050081-06-R1.A3L	<b>Test Dates:</b> 5/5/2020-7/08/2020	<b>EUT Type:</b> Portable Handset	Page 95 of 97

## 9.0 APPENDIX A

### 9.1 VDI Mixer Verification Certificate



**Virginia Diodes, Inc**  
979 2nd St. SE  
Suite 309  
Charlottesville, VA 22902  
Phone: 434-297-3257  
Fax: 434-297-3258

#### Certificate of Conformance

To: PCTEST Engineering Laboratory  
7185 Oakland Mills Road  
Columbia, MD 21046  
United States


From: Virginia Diodes, Inc  
979 2nd St. SE  
Suite 309  
Charlottesville, VA 22902

Packing List No: 193065

Today's Date: 10/02/19

Quantity Shipped	Unit	Description	Order-Job Number
1	EA	VDIWR19.0SAX WR19SAX / SN: SAX 411	19329-01

The VDI product(s) in this shipment meet(s) the guidelines for performance specifications established in accordance with the corresponding Purchase Order. Data presented in the User Guide, where applicable, has been obtained in accordance with VDI's Quality Management System. All instruments, used to obtain data, which require calibration have been calibrated with equipment traceable to the National Institute of Standards and Technology (NIST) and through NIST to the International System of Units (SI).

  
Authorized Signature  
Virginia Diodes, Inc

Page 1 of 1

FCC ID: A3LSMN981U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2005050081-06-R1.A3L	Test Dates: 5/5/2020-7/08/2020	EUT Type: Portable Handset		Page 96 of 97





**Virginia Diodes, Inc**  
979 2nd St. SE  
Suite 309  
Charlottesville, VA 22902  
Phone: 434-297-3257  
Fax: 434-297-3258

**Certificate of Conformance**

To: PCTEST Engineering Laboratory  
7185 Oakland Mills Road  
Columbia, MD 21046  
United States

From: Virginia Diodes, Inc  
979 2nd St. SE  
Suite 309  
Charlottesville, VA 22902

<b>Packing List No:</b> 193037	<b>Today's Date:</b> 09/30/19
<b>Shipping Date:</b> 09/30/19	<b>PO Number:</b> 190719.DP1R

Quantity	Shipped	Unit	Description	Order-Job Number
1		EA	SAX RETEST-WR12SAX WR12SAX / SN: SAX 252	19408-01
1		EA	SAX RETEST-WR8.0SAX WR8.0SAX / SN: SAX 253	19408-02
1		EA	SAX RETEST-WR5.1SAX WR5.1SAX / SN: SAX 254	19408-03

The VDI product(s) in this shipment meet(s) the guidelines for performance specifications established in accordance with the corresponding Purchase Order. Data presented in the User Guide, where applicable, has been obtained in accordance with VDI's Quality Management System. All instruments, used to obtain data, which require calibration have been calibrated with equipment traceable to the National Institute of Standards and Technology (NIST) and through NIST to the International System of Units (SI).

\_\_\_\_\_  
Authorized Signature  
Virginia Diodes, Inc



<b>FCC ID:</b> A3LSMN981U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M2005050081-06-R1.A3L	<b>Test Dates:</b> 5/5/2020-7/08/2020	<b>EUT Type:</b> Portable Handset		Page 97 of 97