





DTS 2.4 GHz IEEE 802.11n HT20 mode

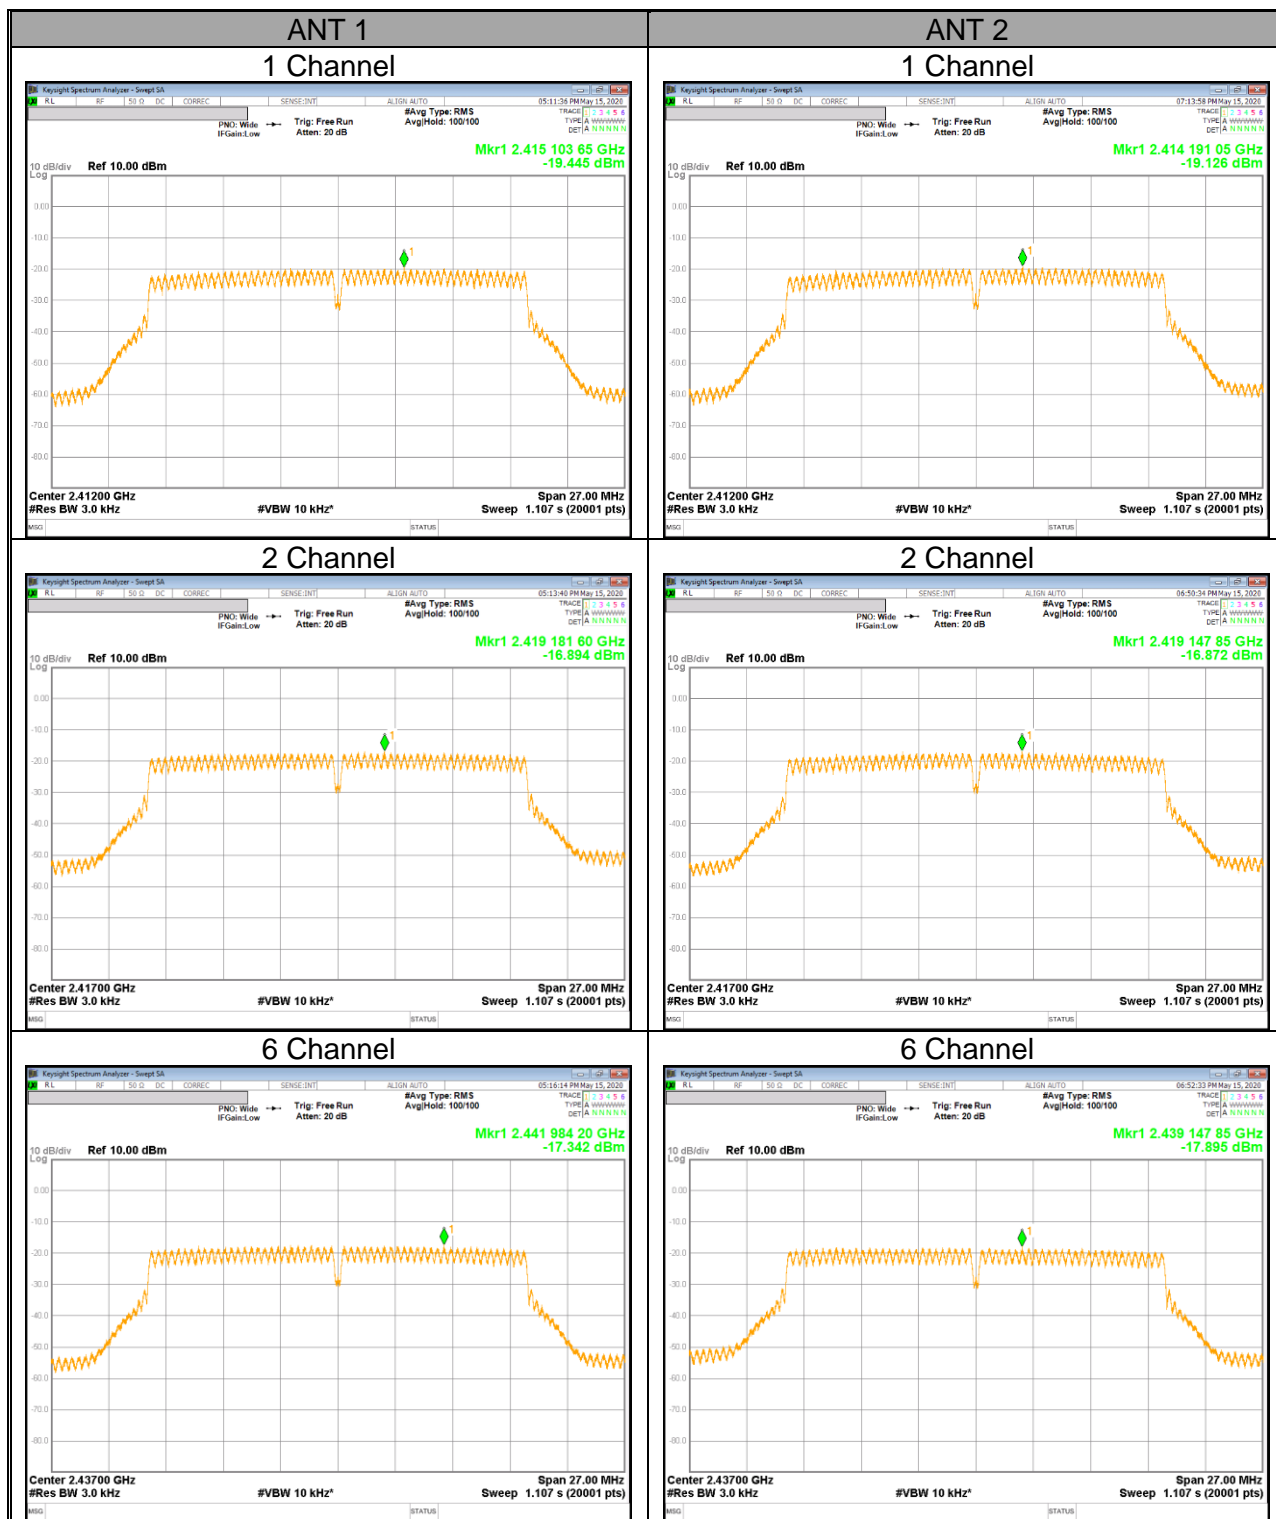


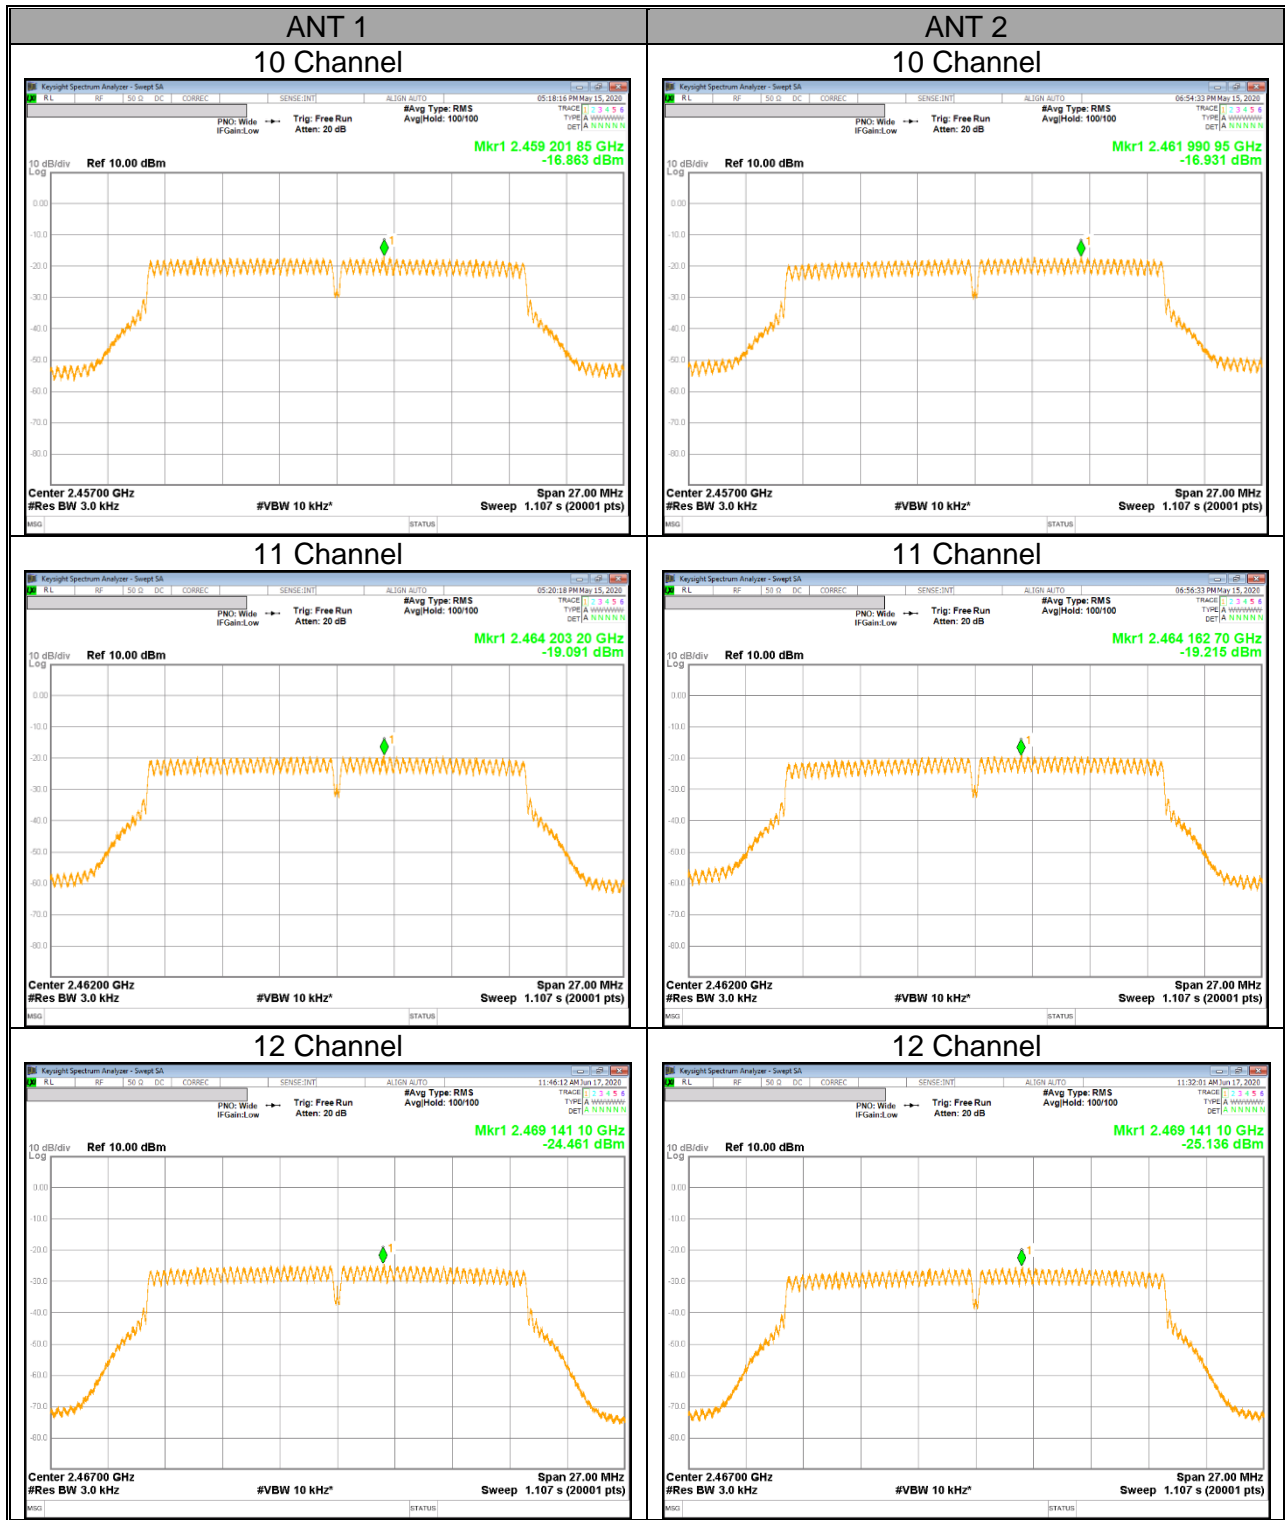


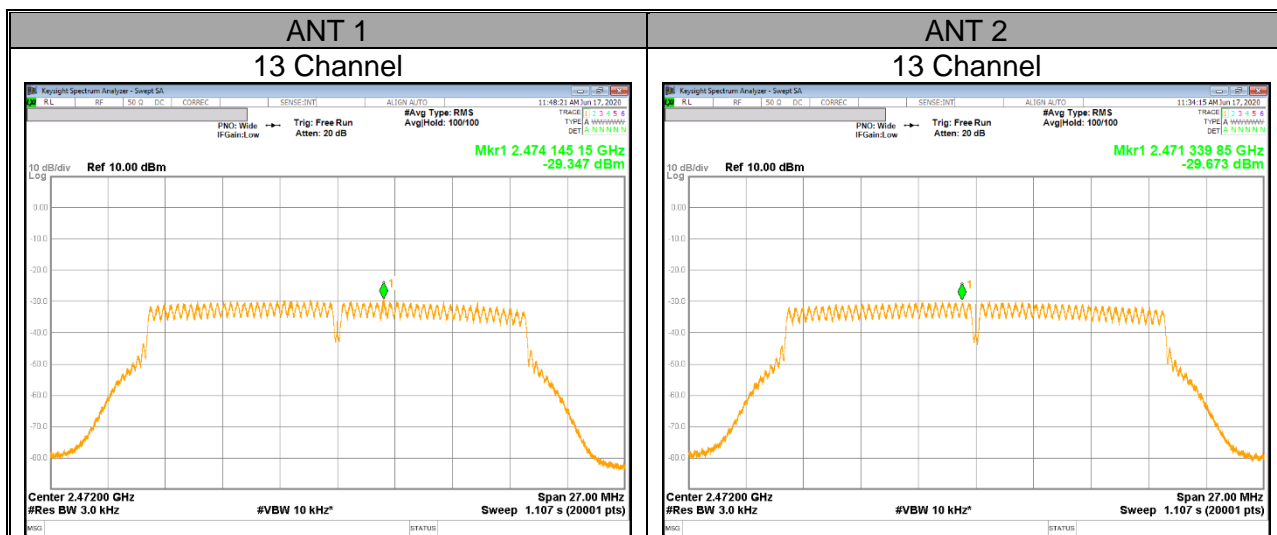



DTS 2.4 GHz IEEE 802.11ax HE20 mode(SISO)

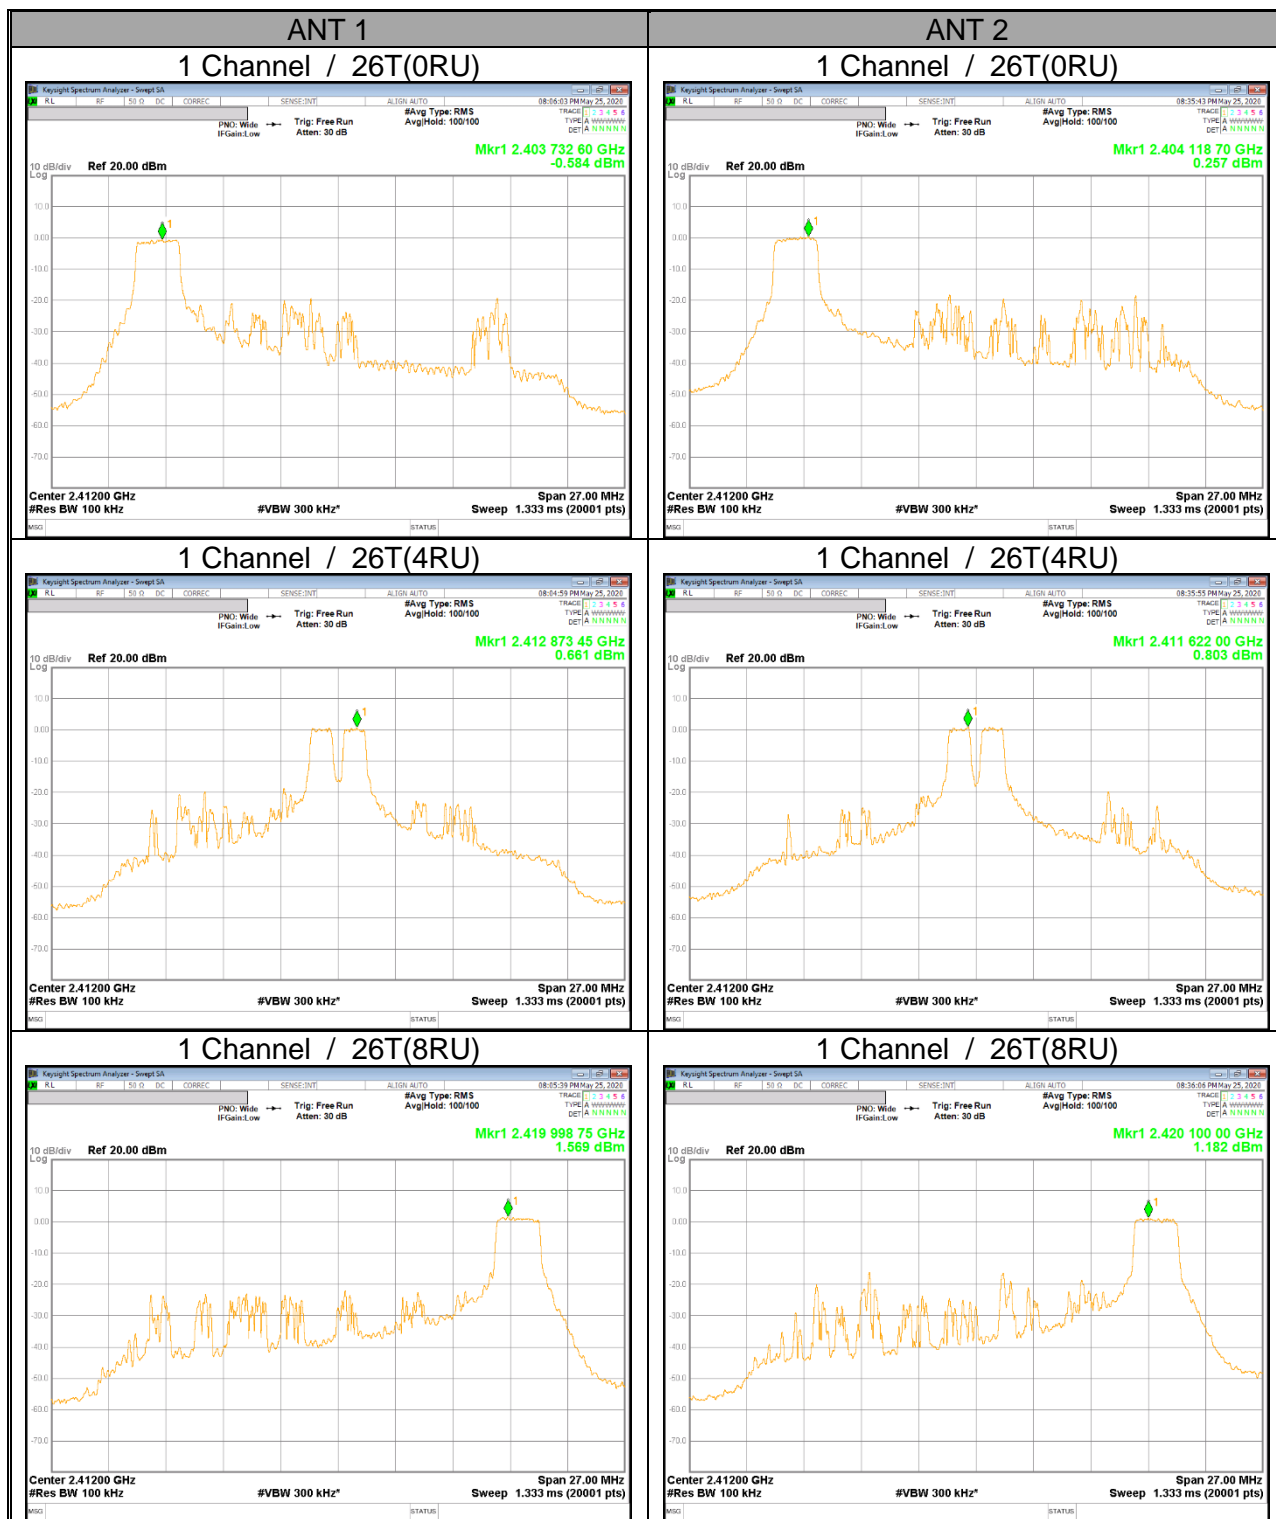

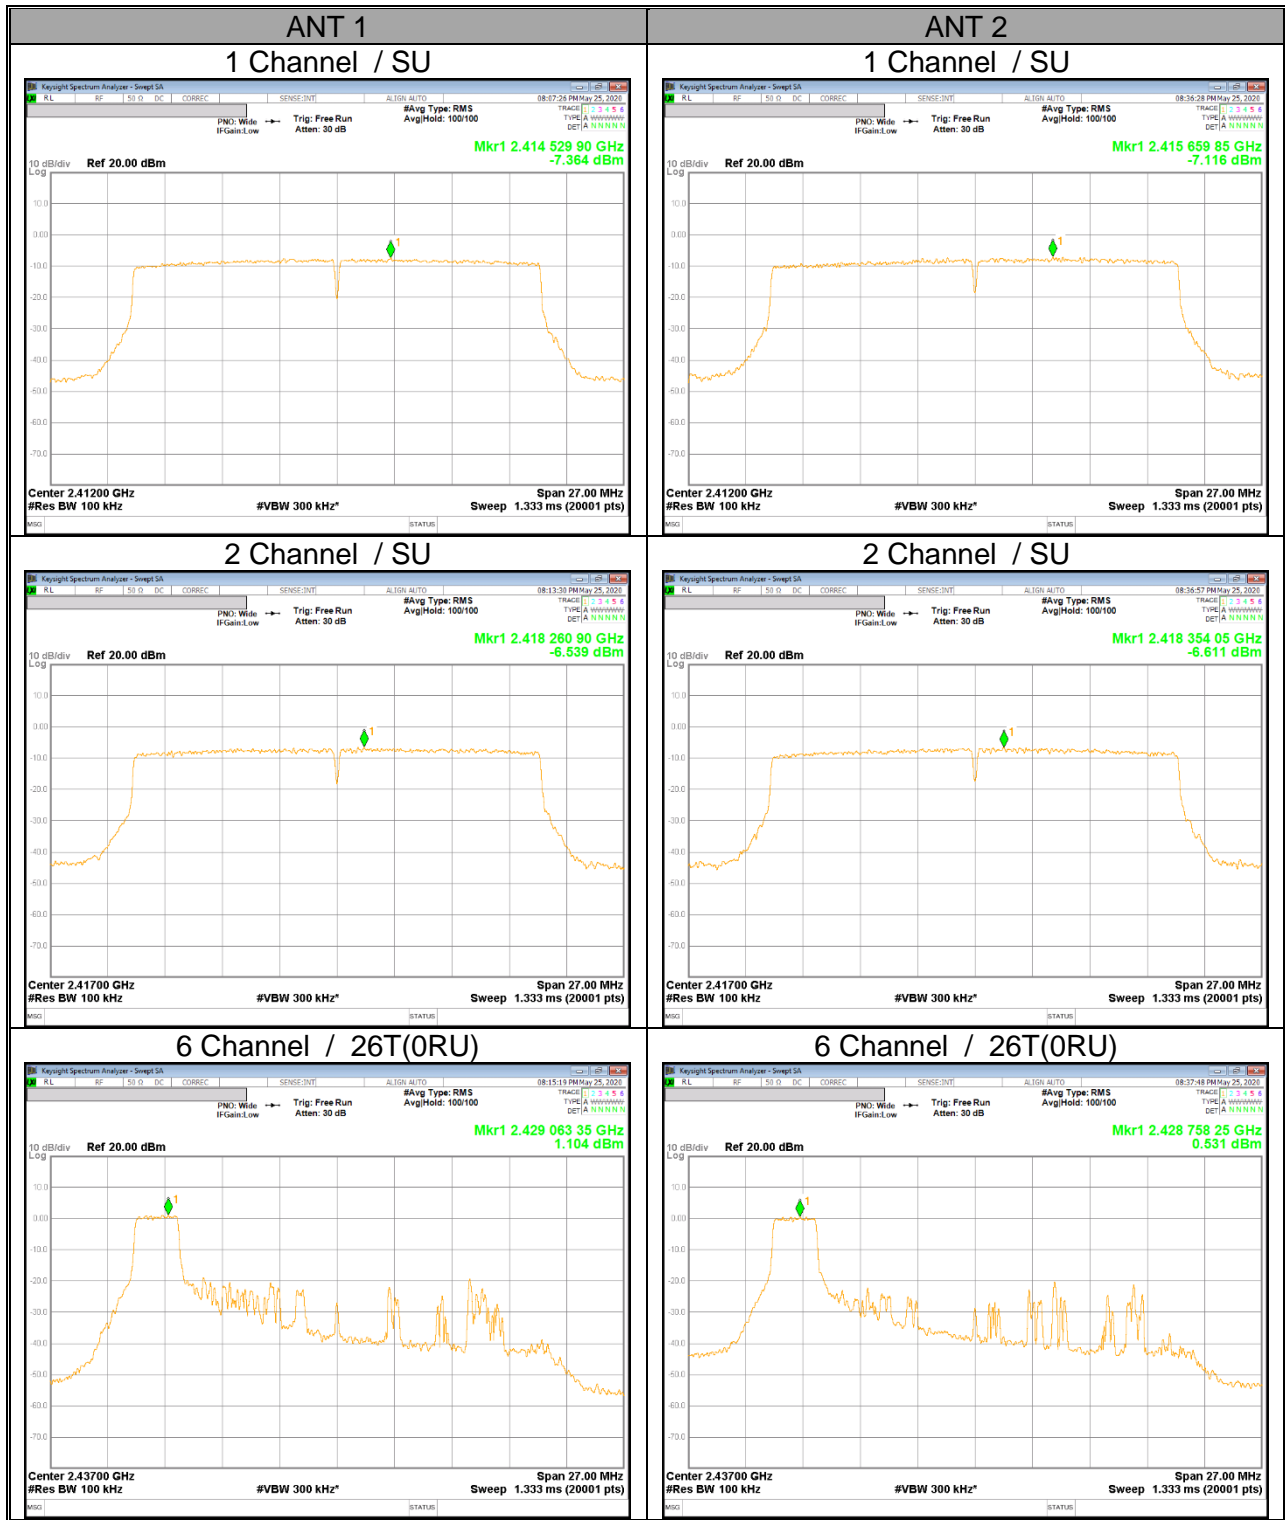


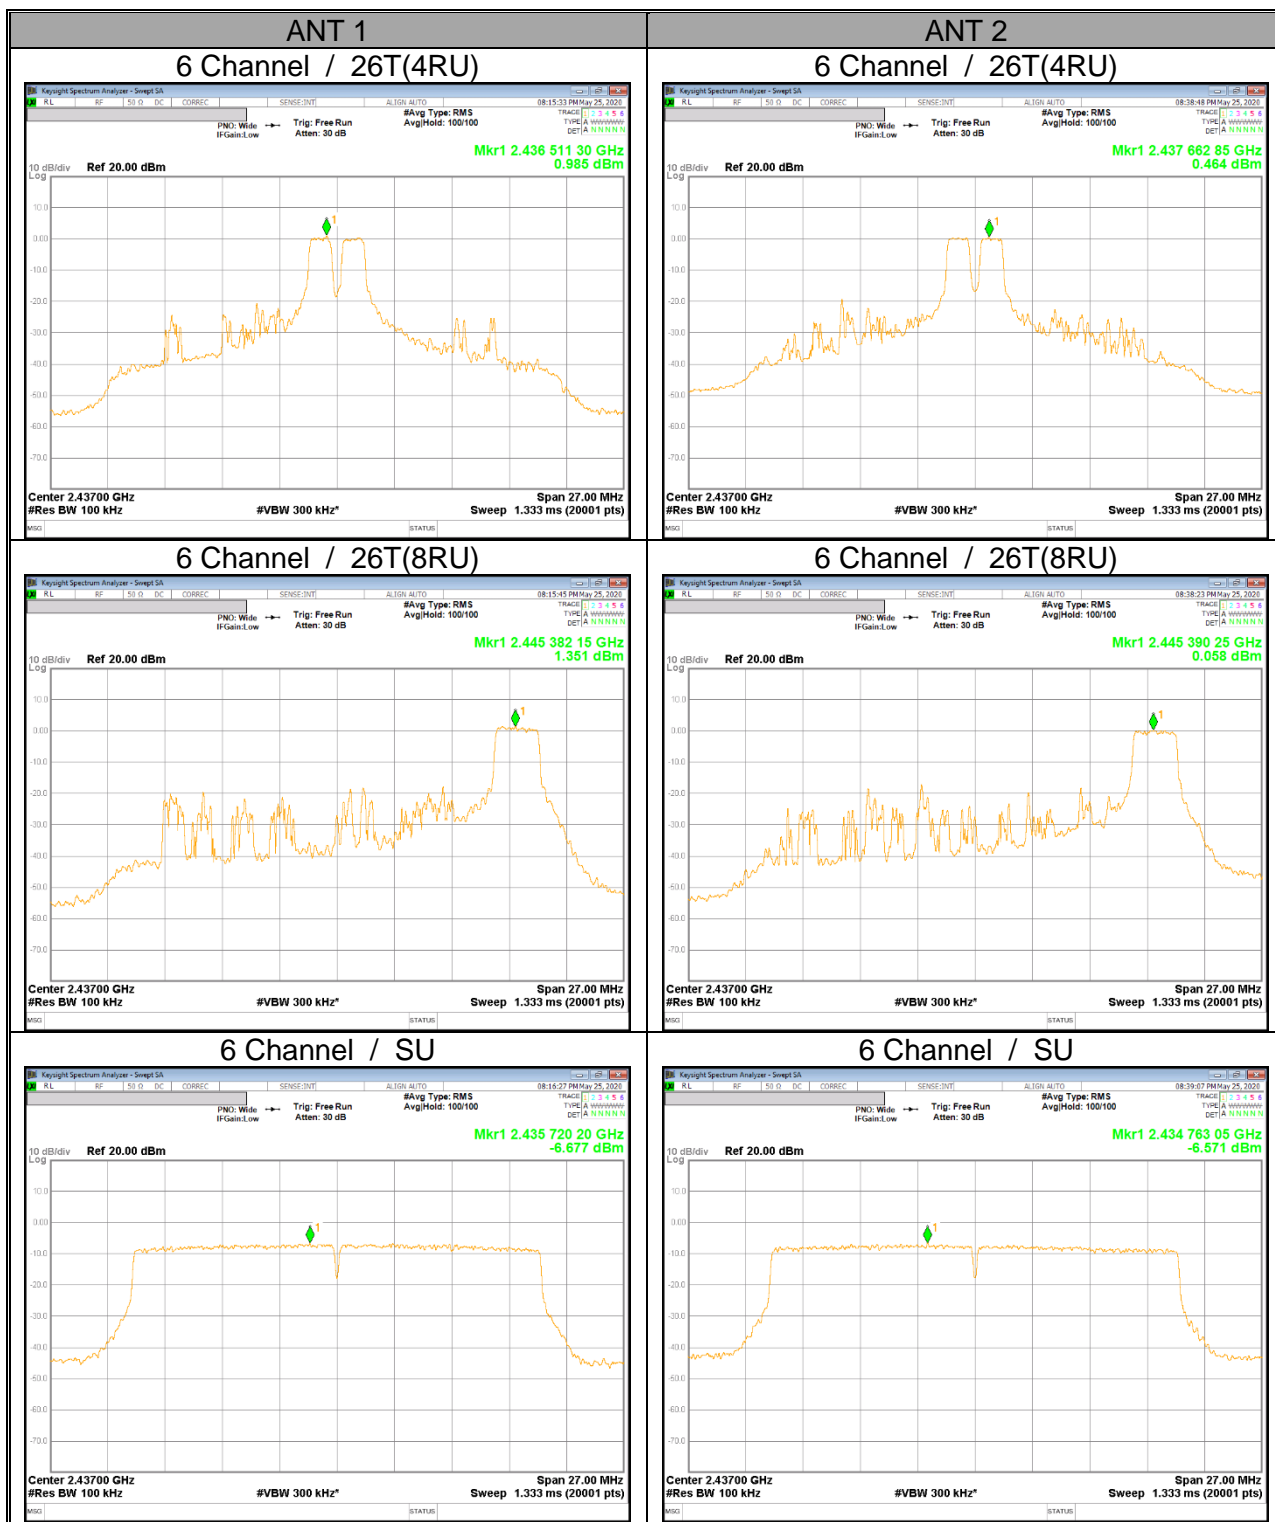

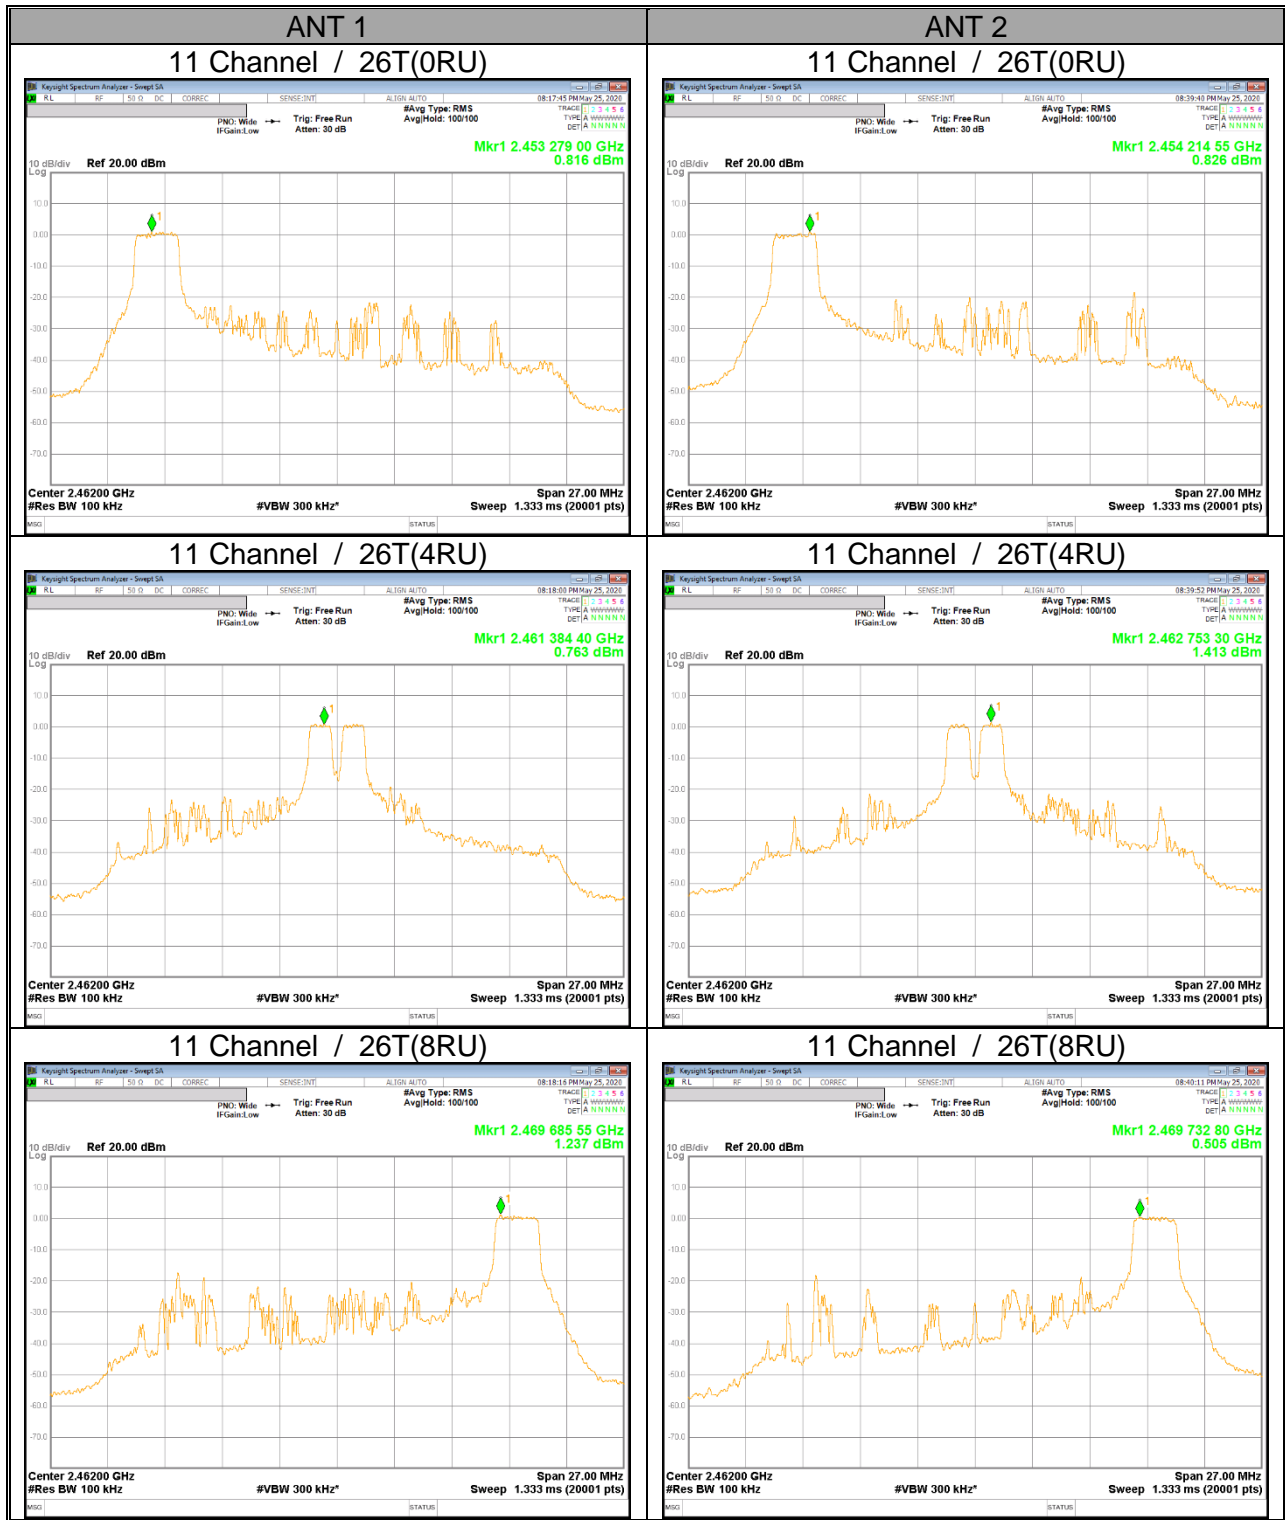


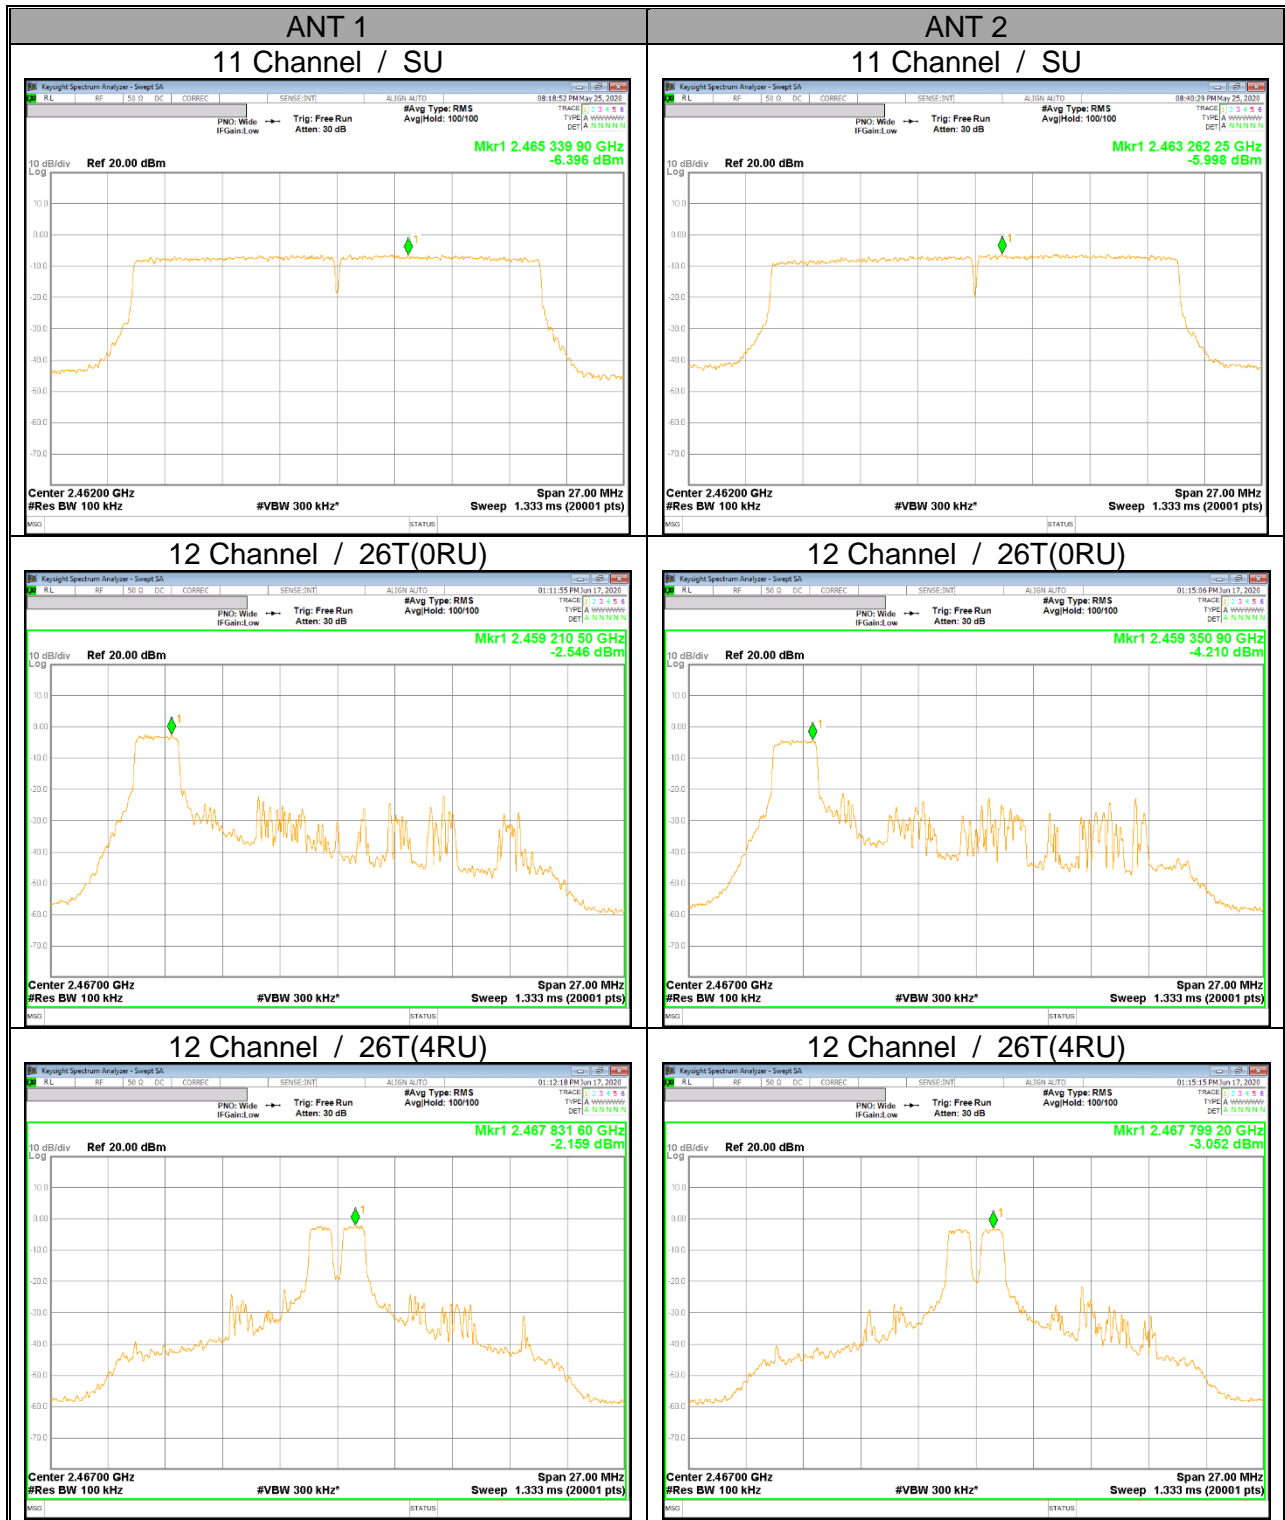





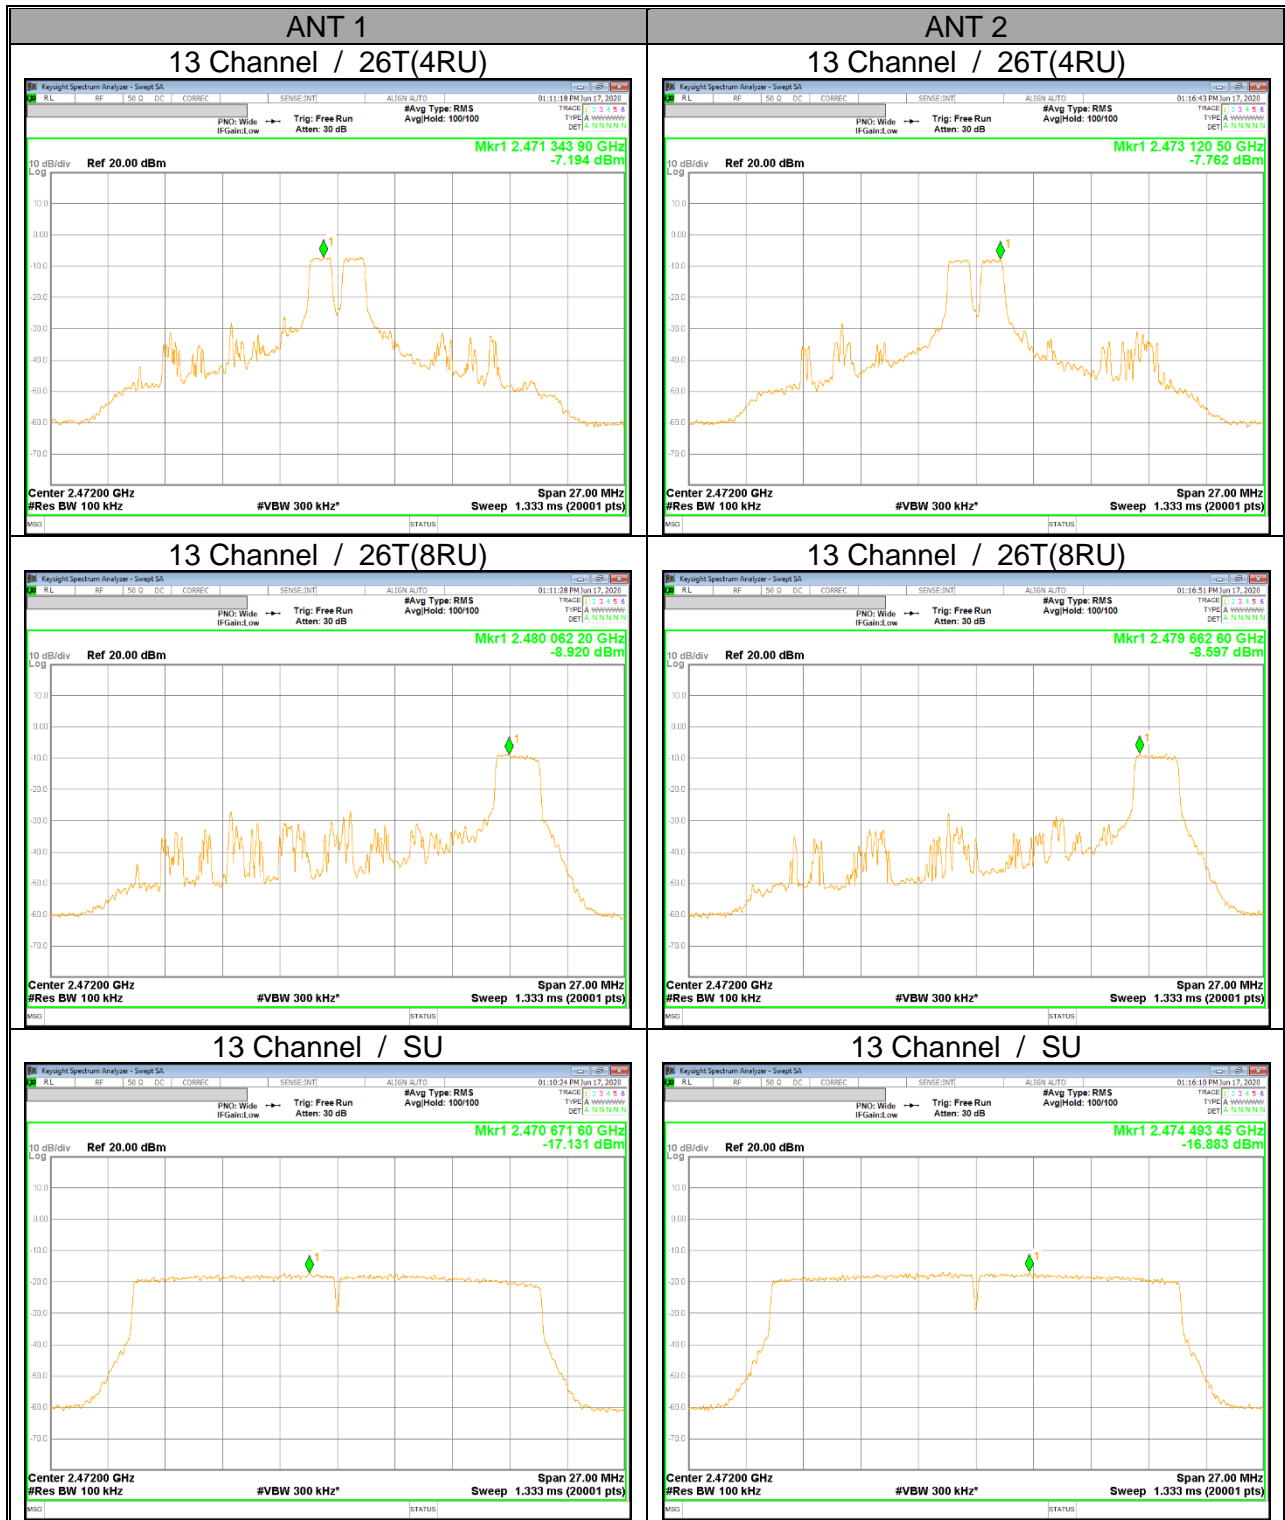



DTS 2.4 GHz IEEE 802.11ax HE20 mode(MIMO)

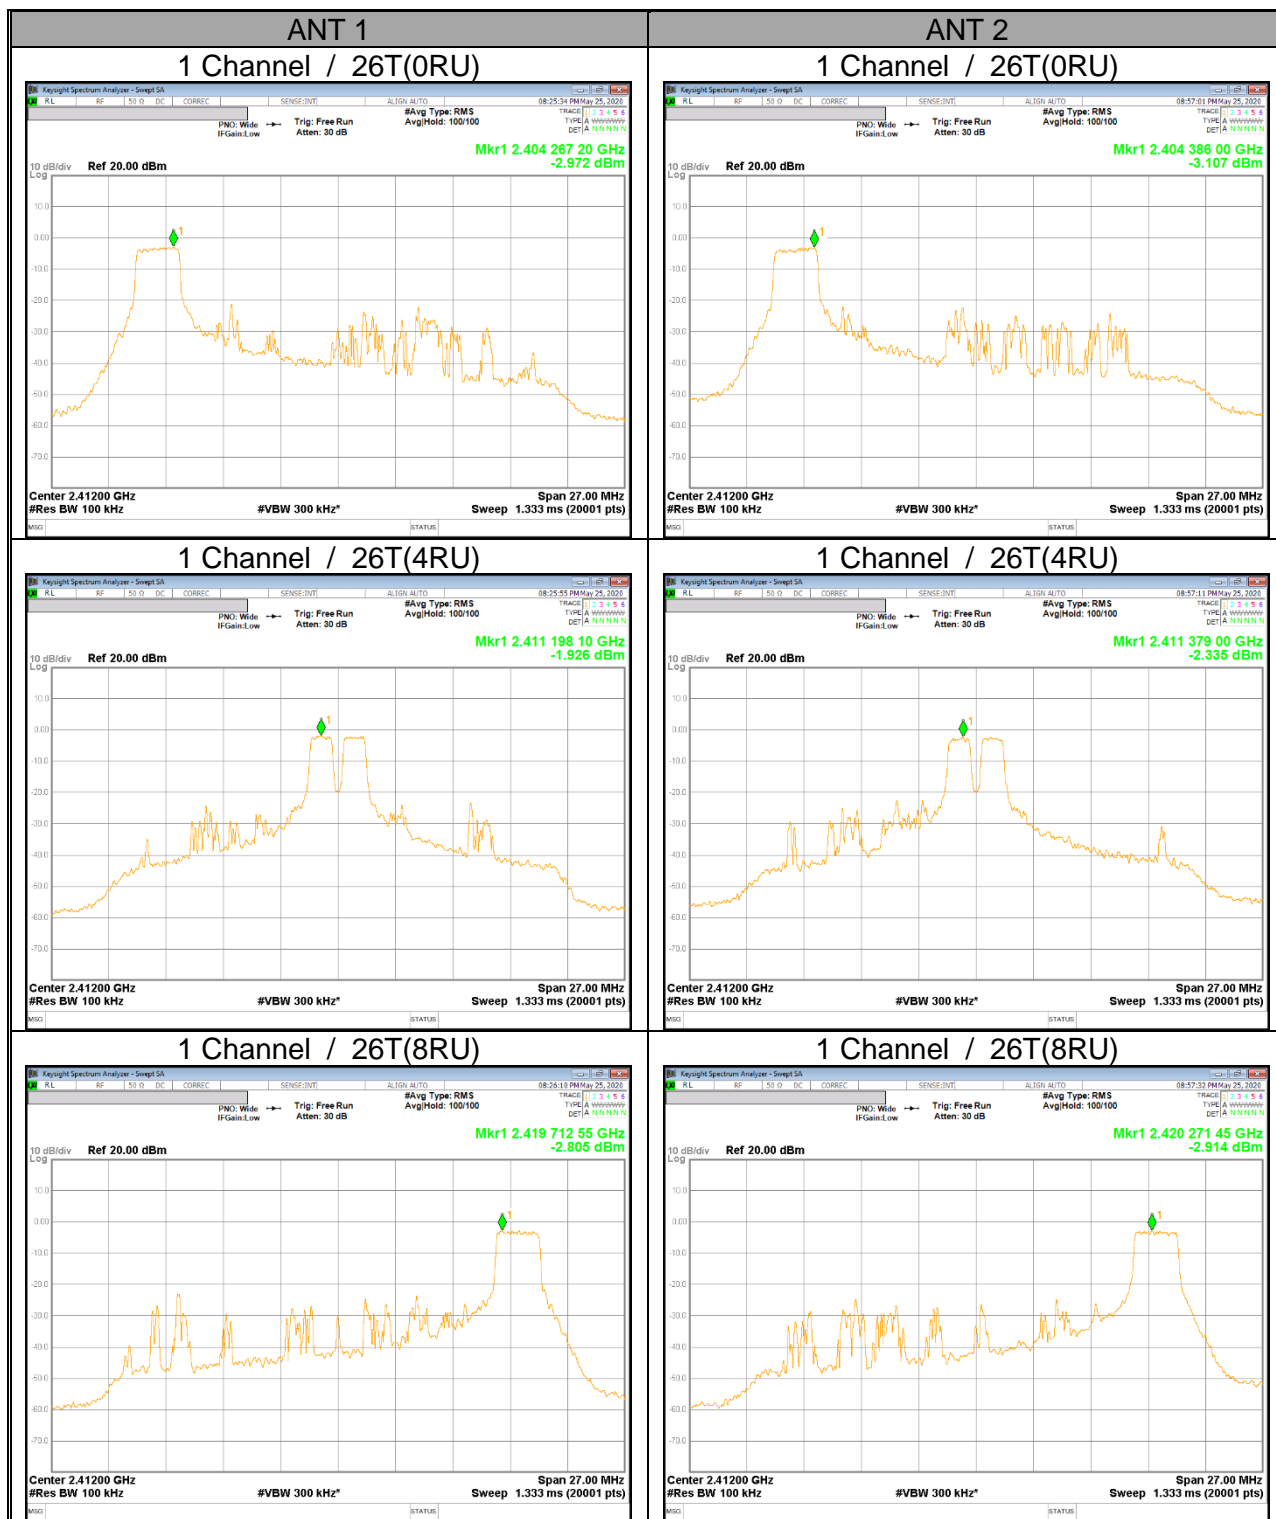


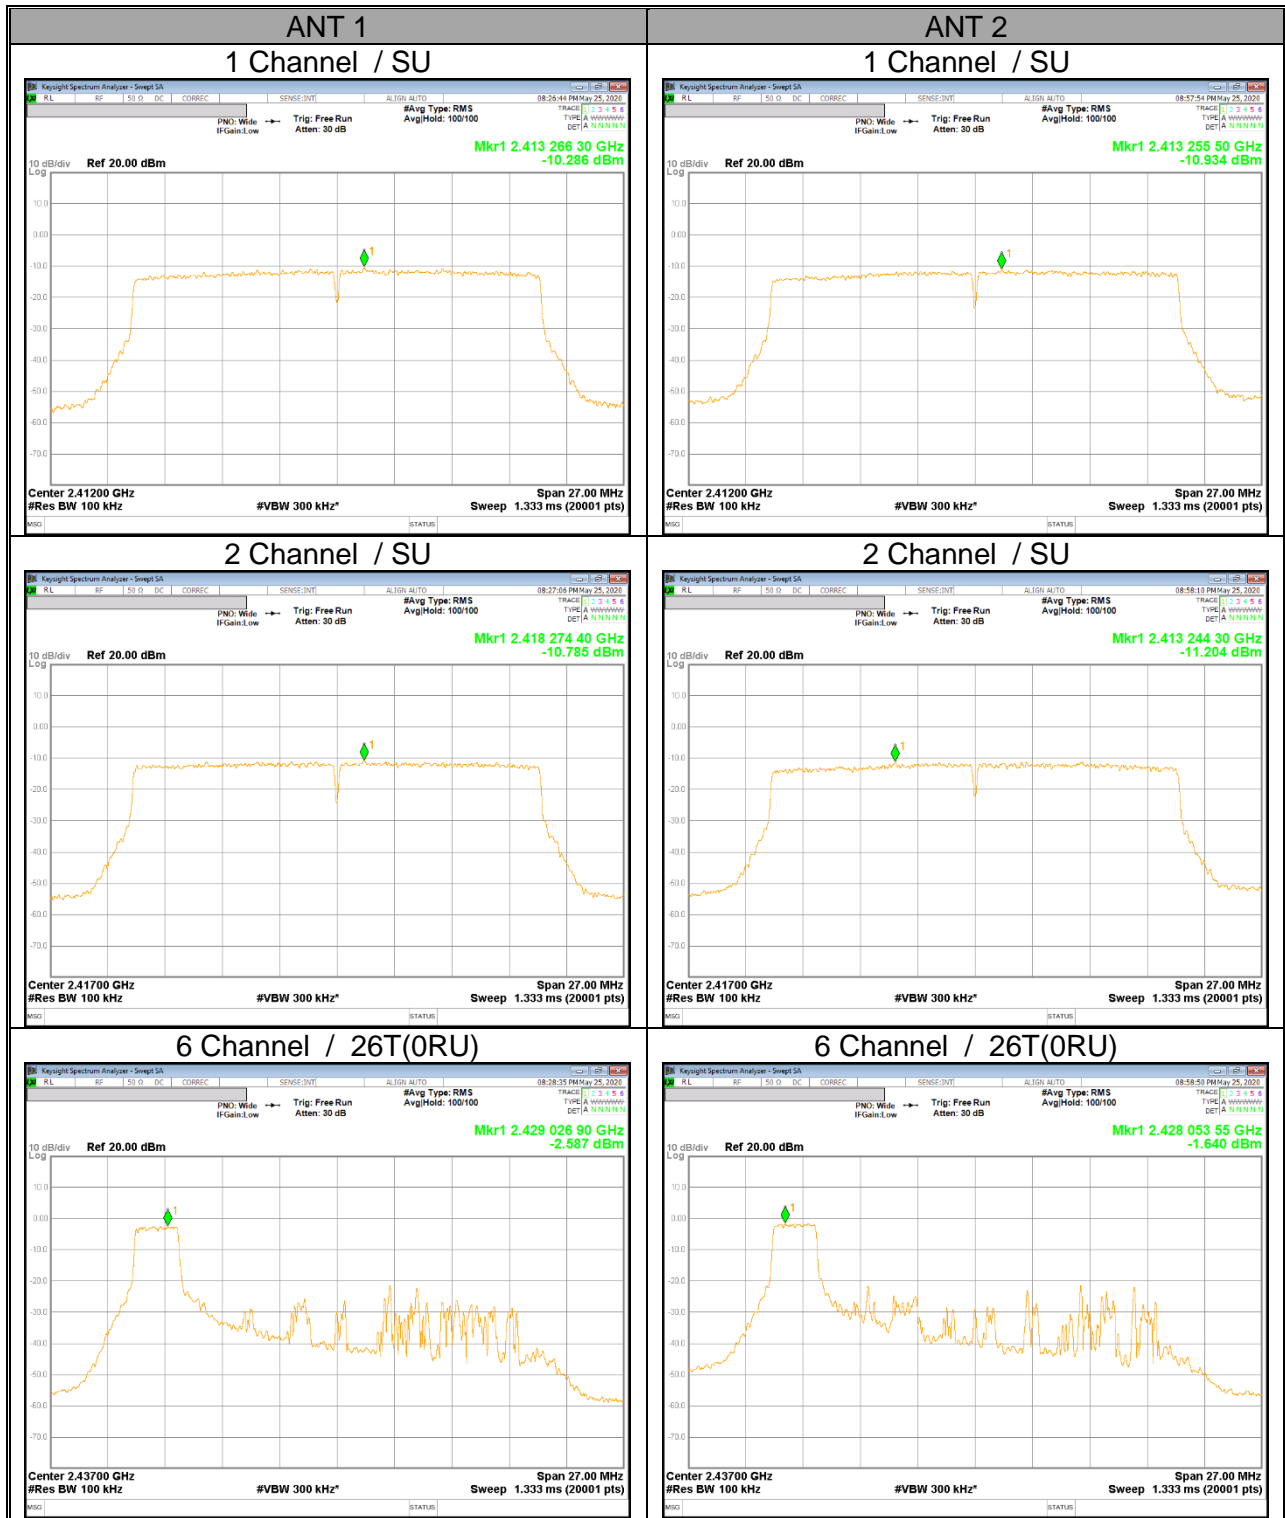


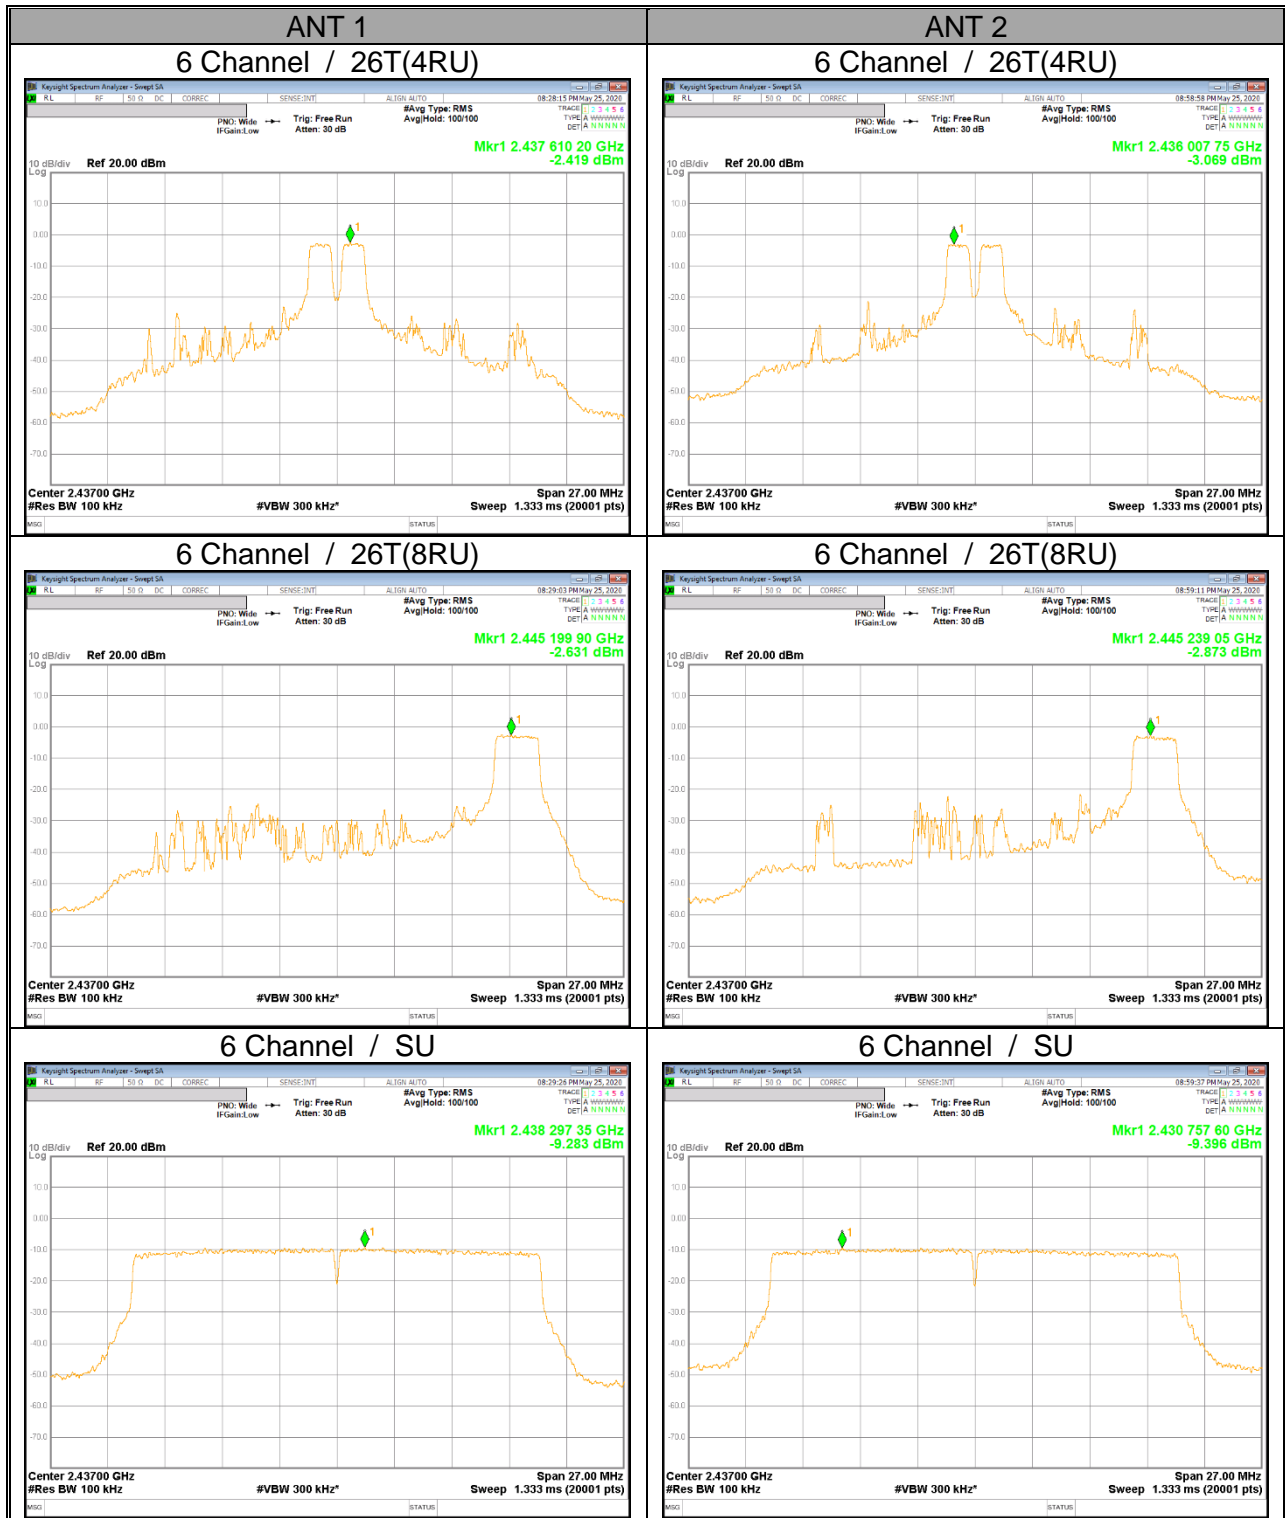

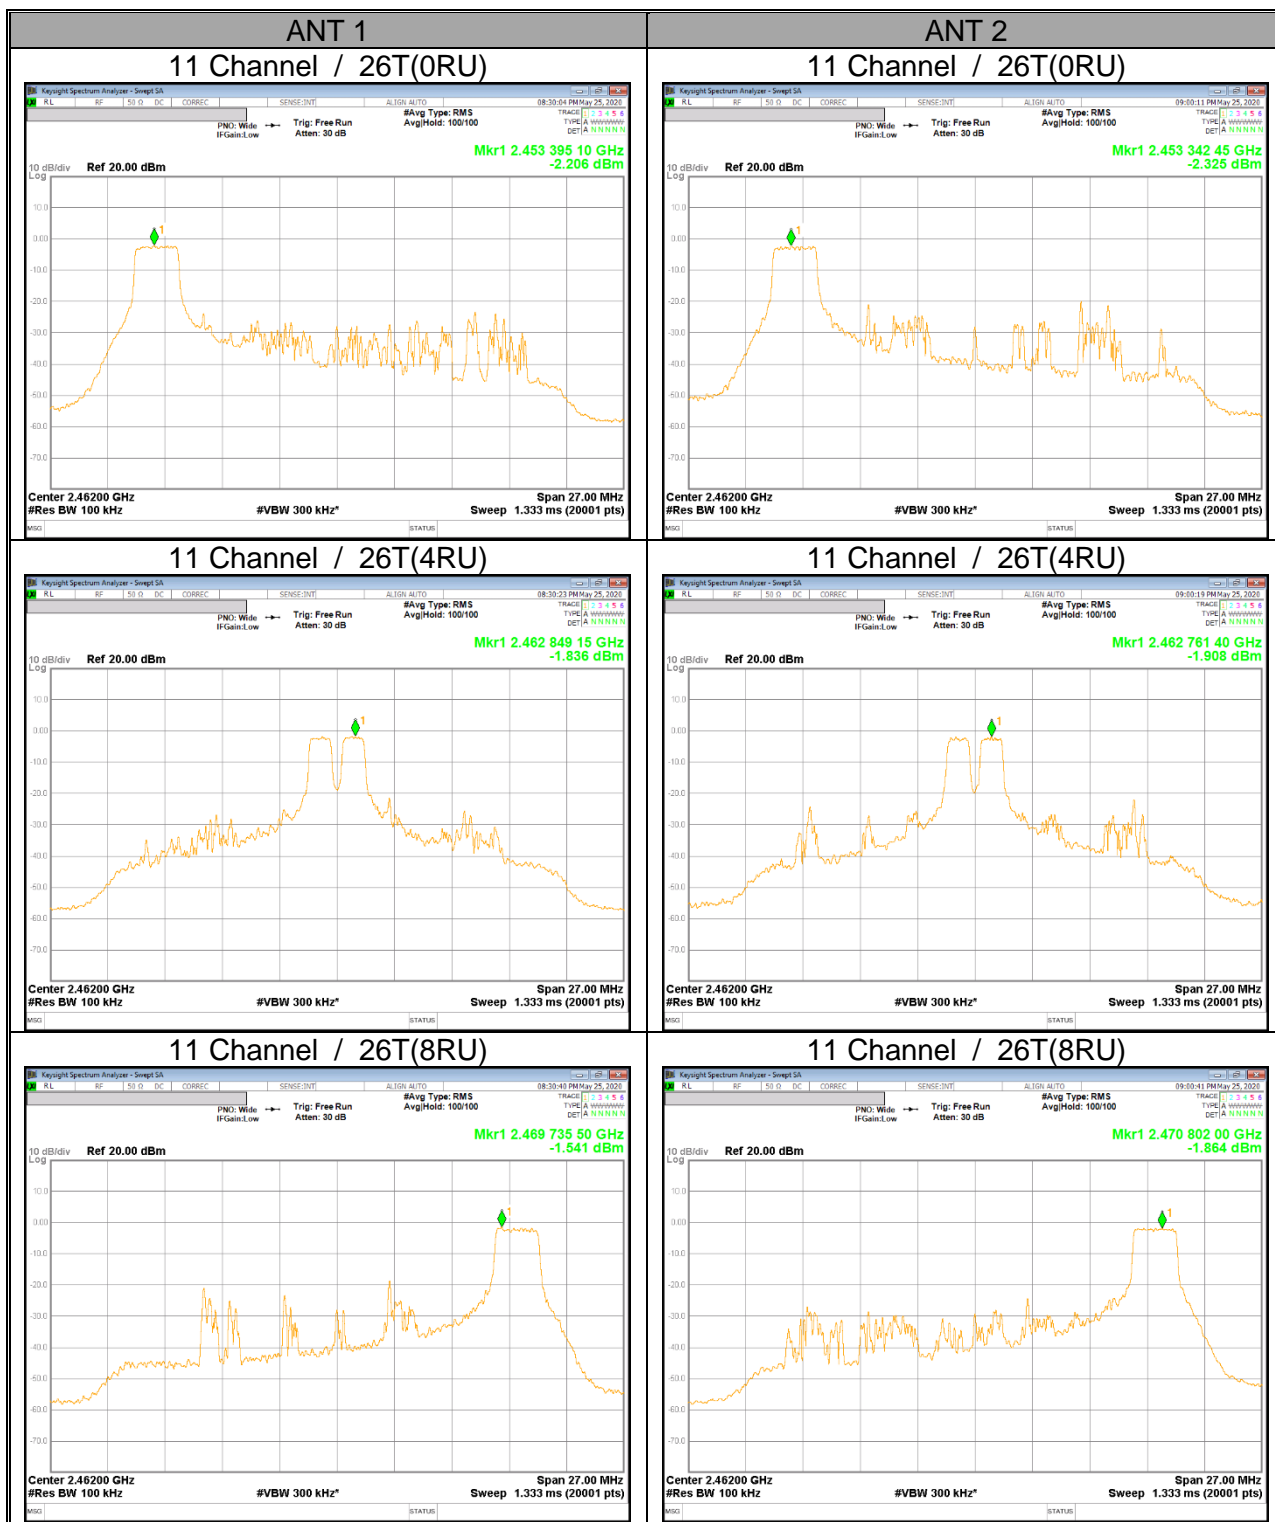

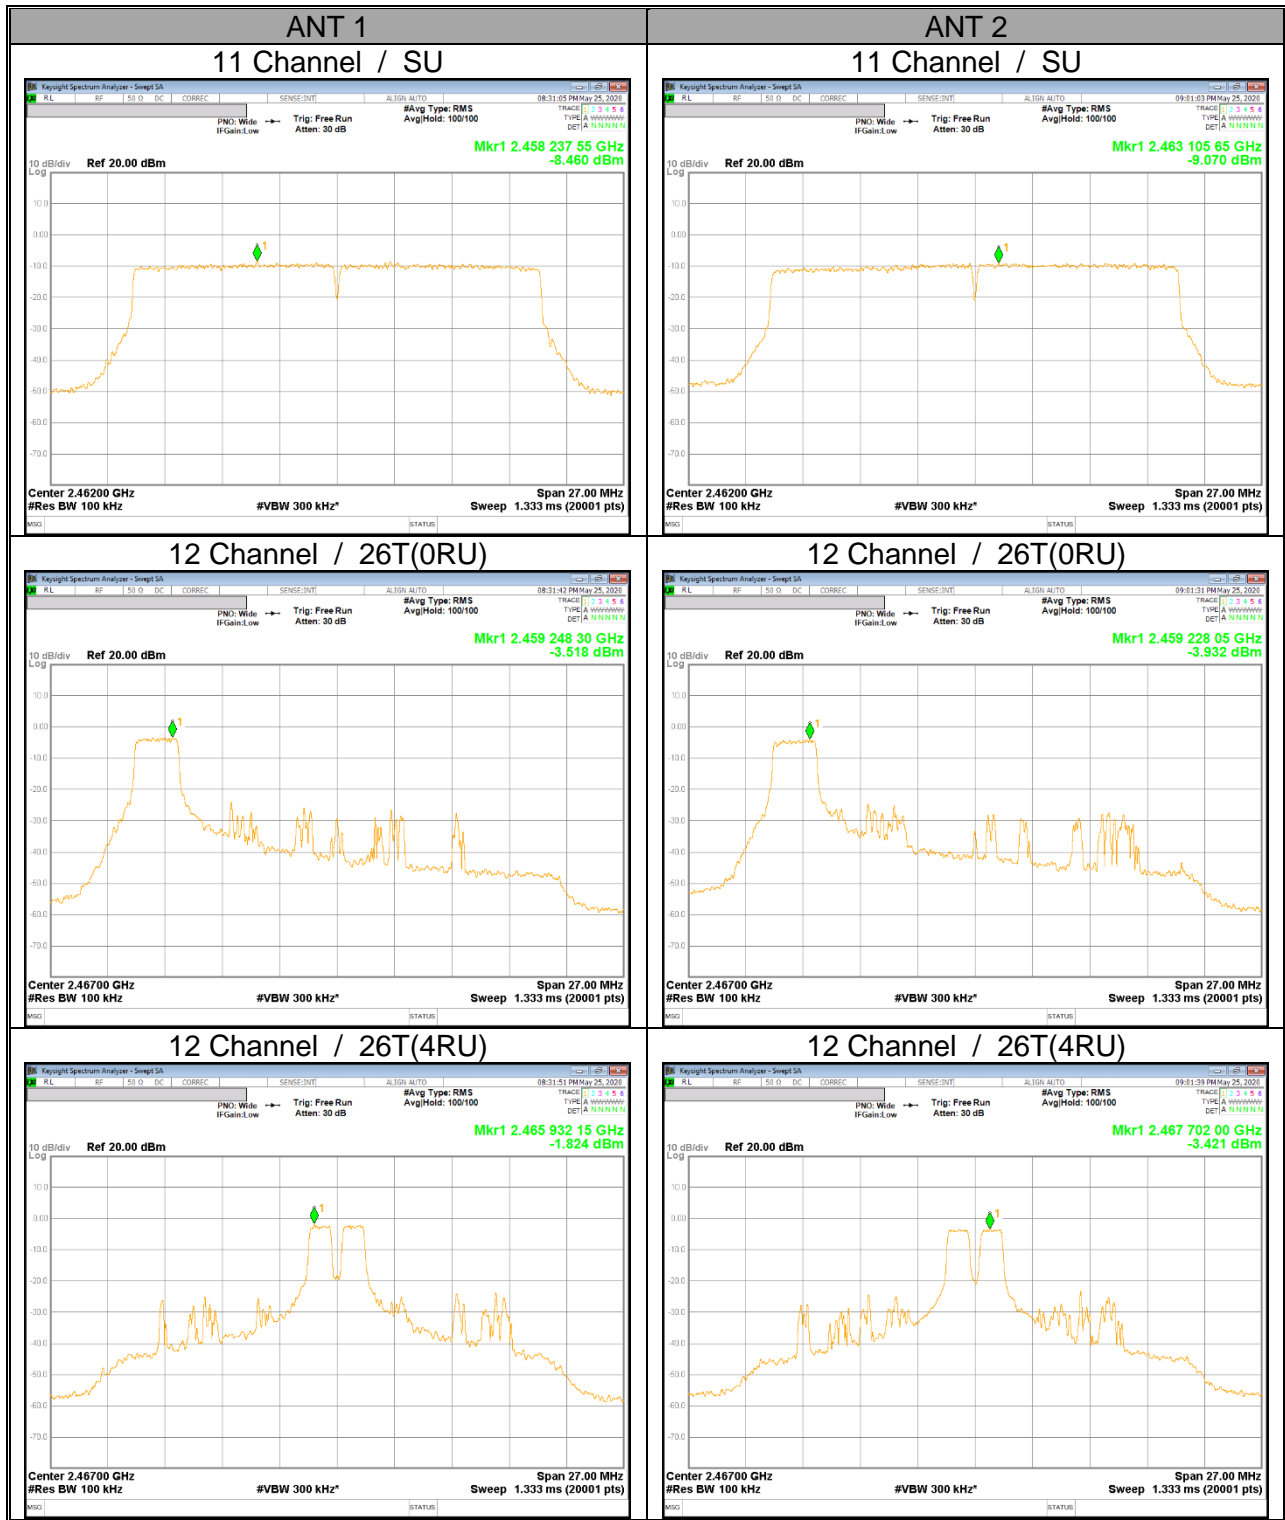

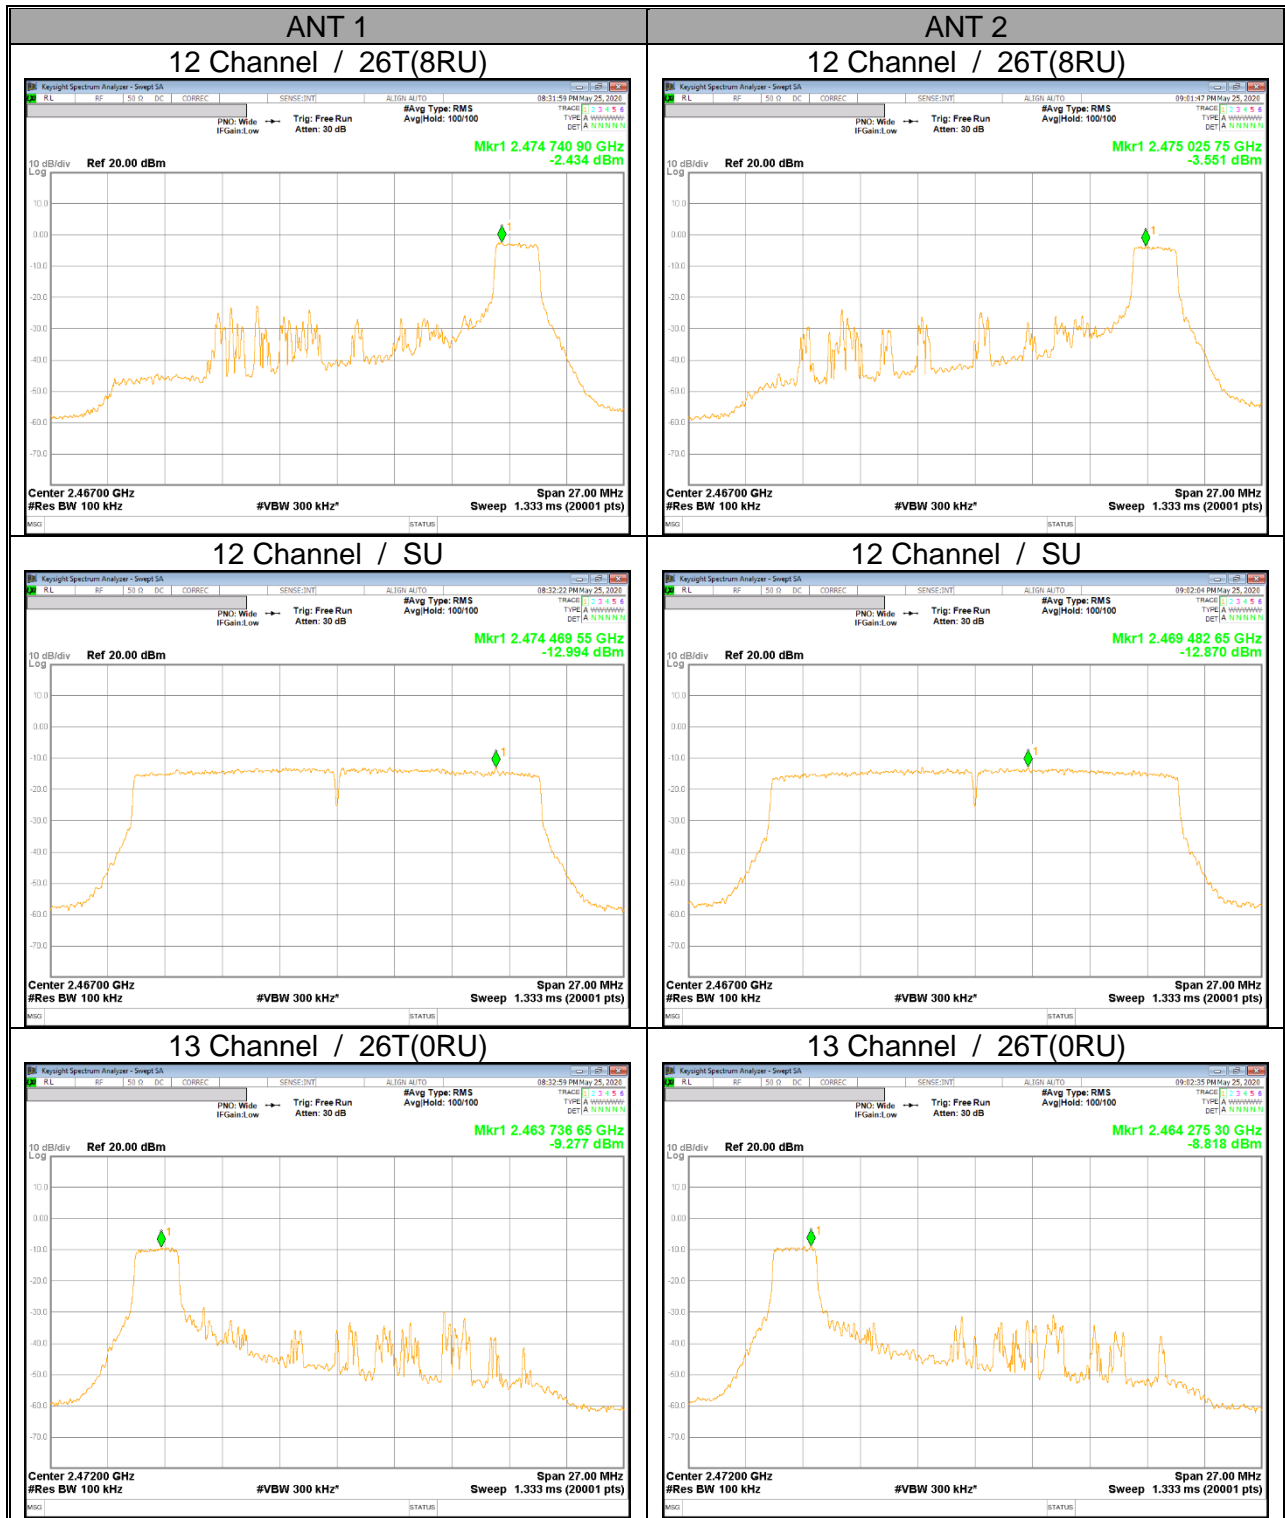

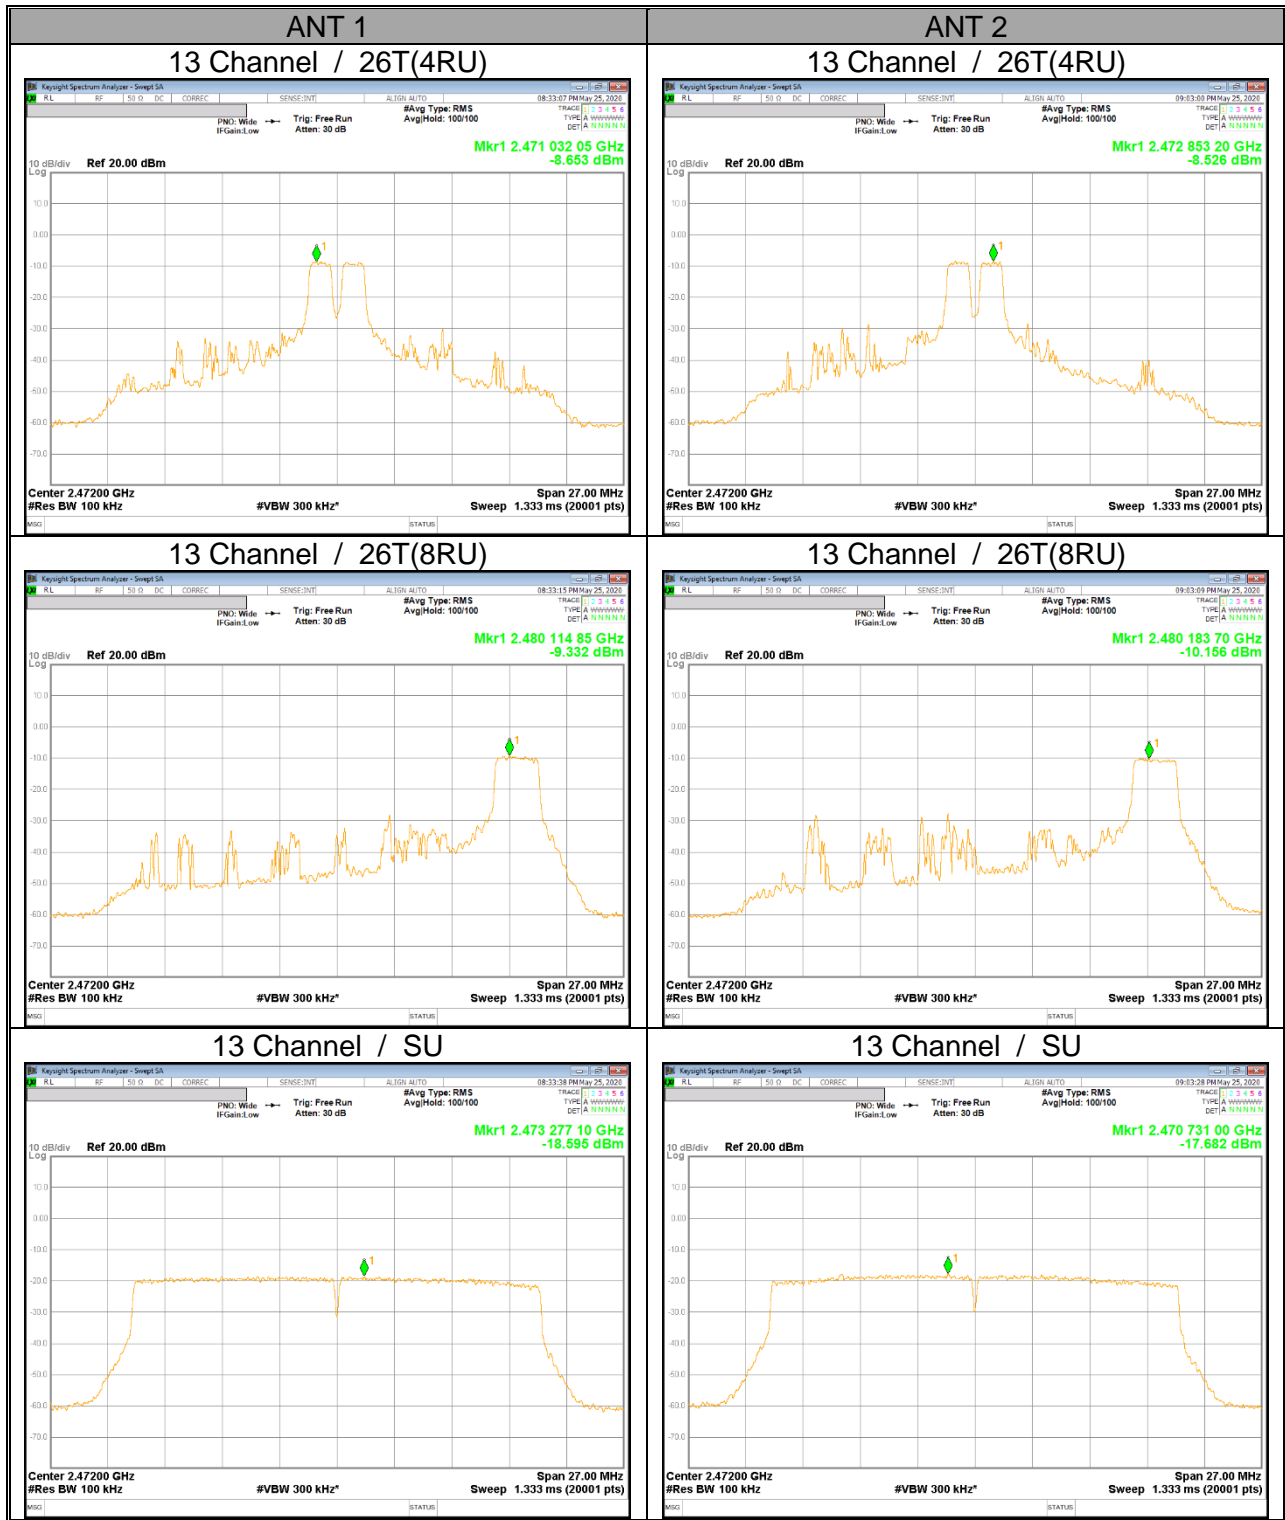

9.5. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

RSS-247 5.5

Output power was measured based on the use of average measurement, therefore the required attenuation is 30 dB.

RESULTS

9.5.1. 802.11b MODE

1TX Antenna 1

