




1TX Antenna 2

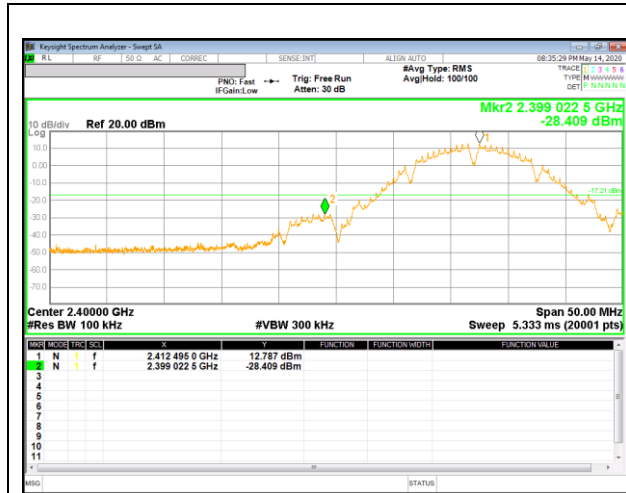


1 Channel Band-edge

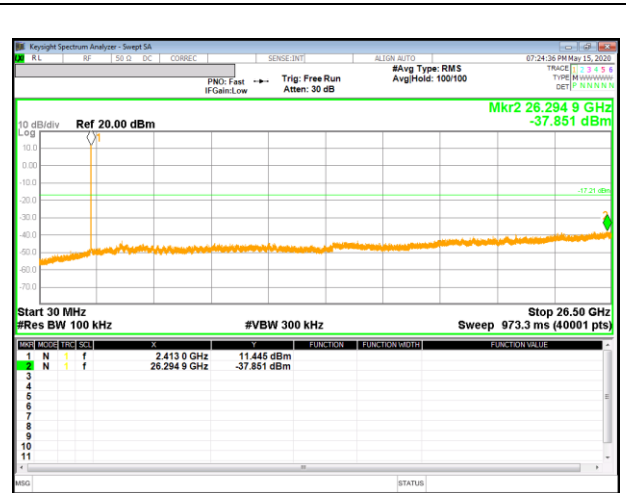


Out-Of-Band 1 Channel

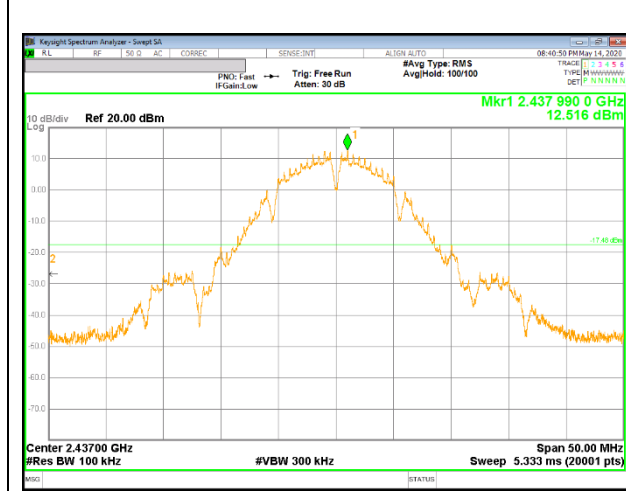


In-Band Reference Level

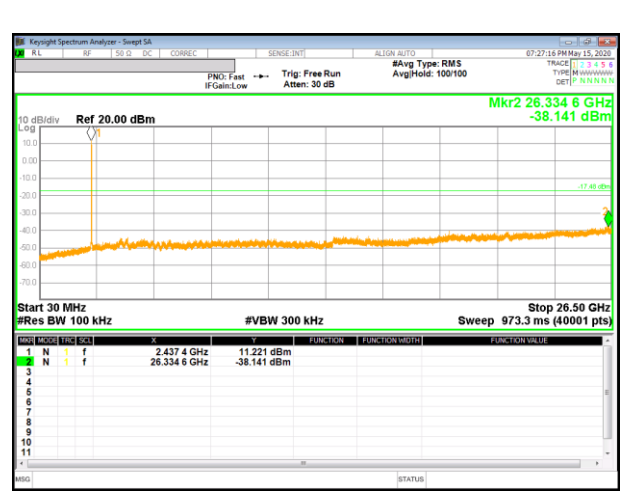



Out-Of-Band 6 Channel

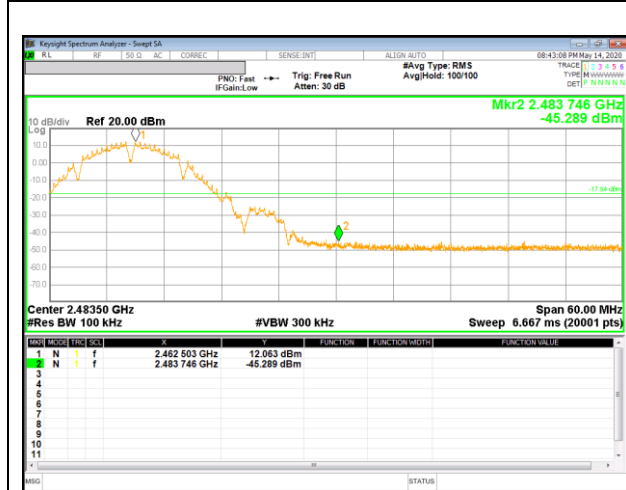

11 Channel Band-edge

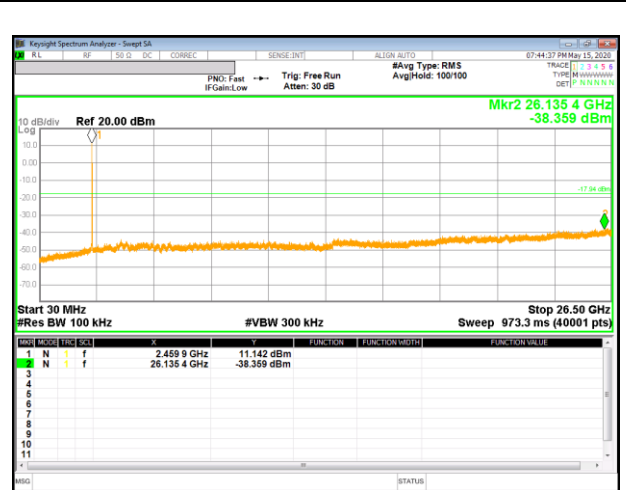


Out-Of-Band 11 Channel

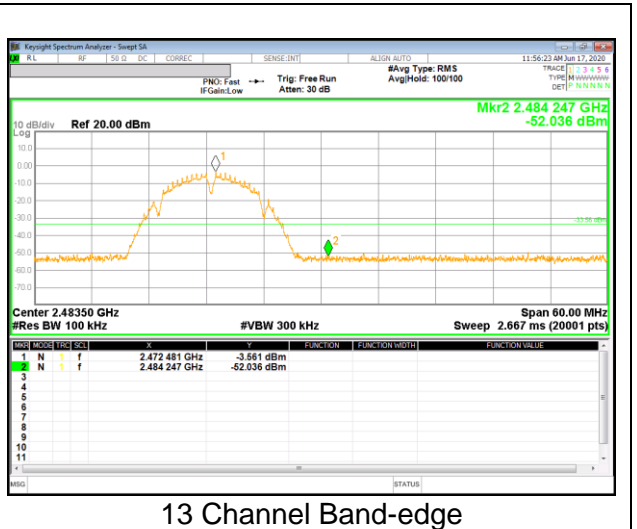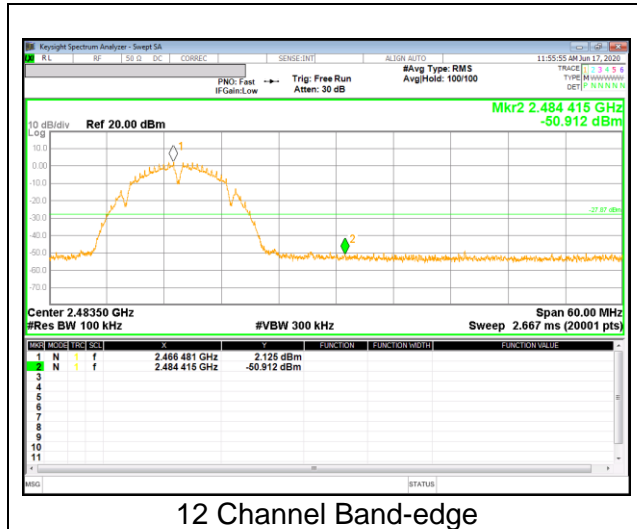


9.5.2. 802.11g MODE


2TX Antenna 1

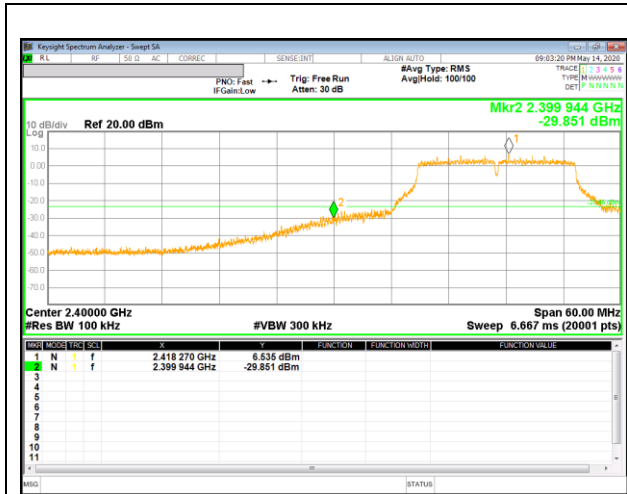


2 Channel Band-edge

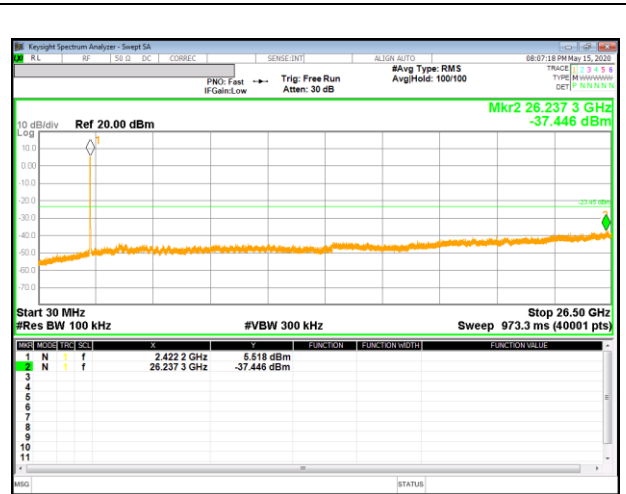


Out-Of-Band 2 Channel

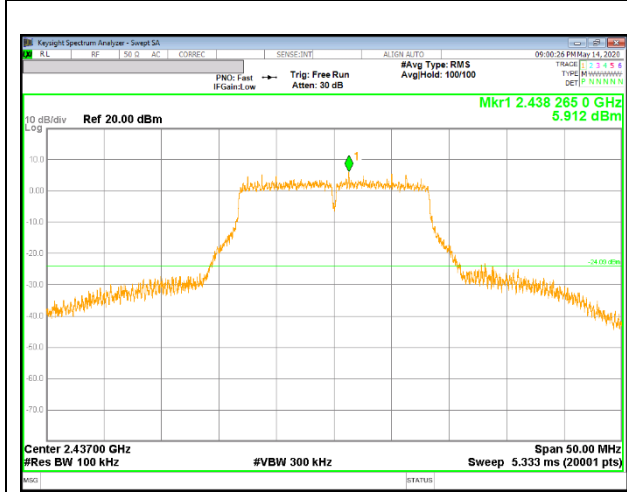


In-Band Reference Level

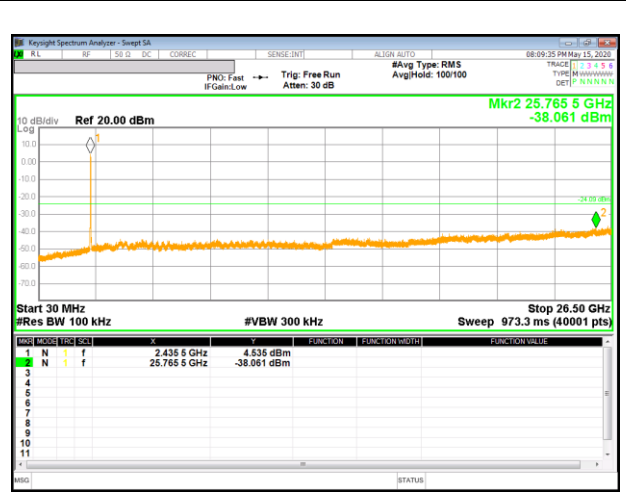


Out-Of-Band 6 Channel

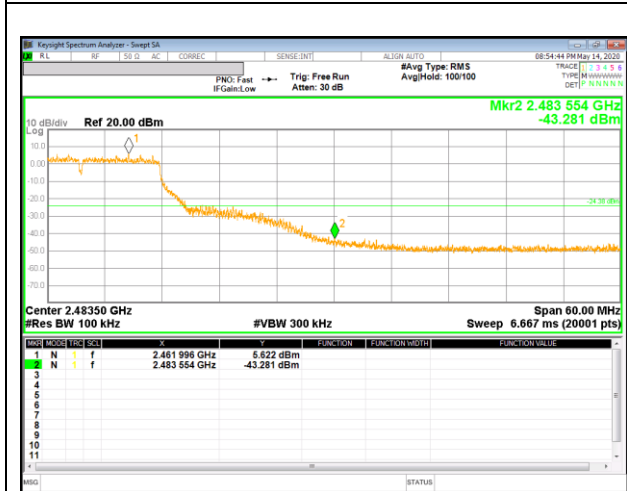


10 Channel Band-edge

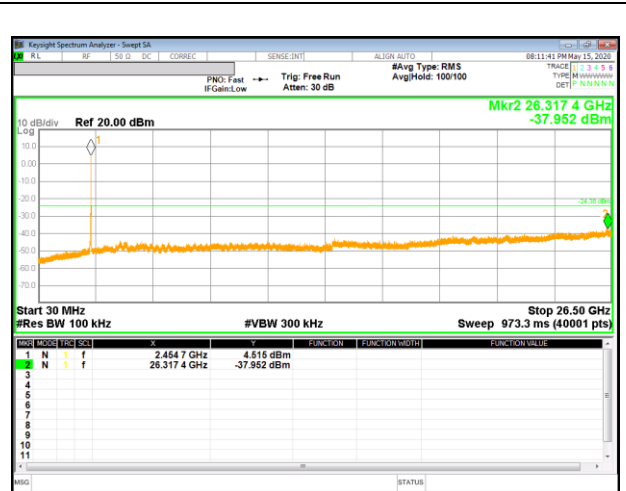


Out-Of-Band 10 Channel

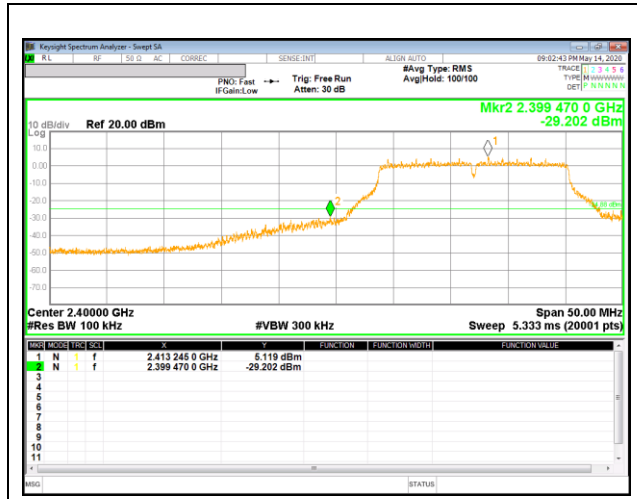


1 Channel Band-edge

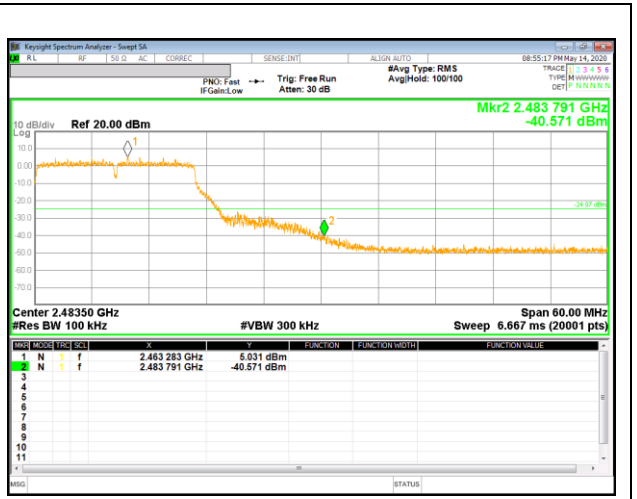

11 Channel Band-edge

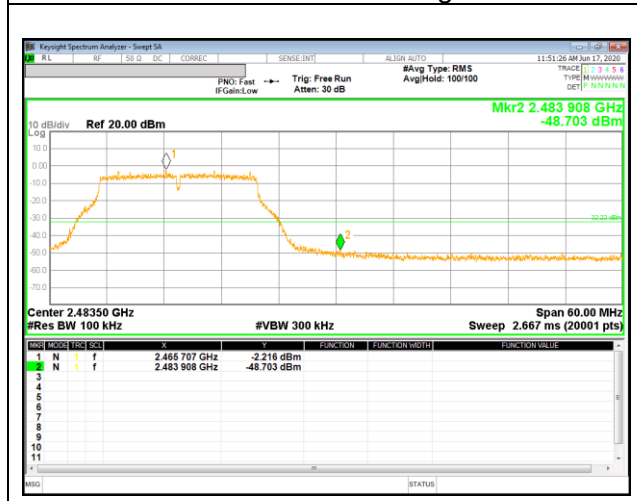


12 Channel Band-edge

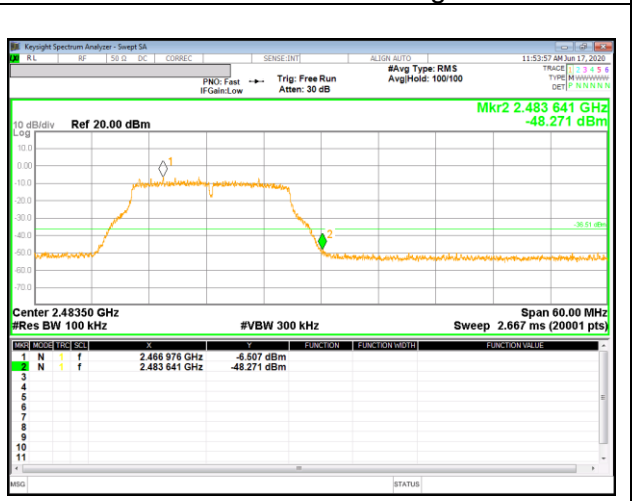


13 Channel Band-edge


2TX Antenna 2

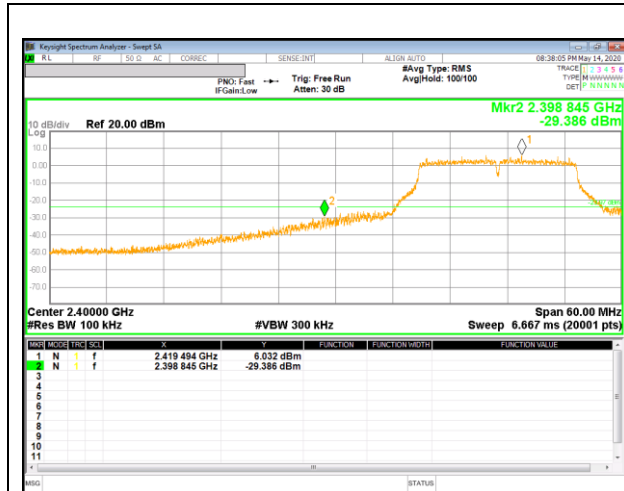


2 Channel Band-edge

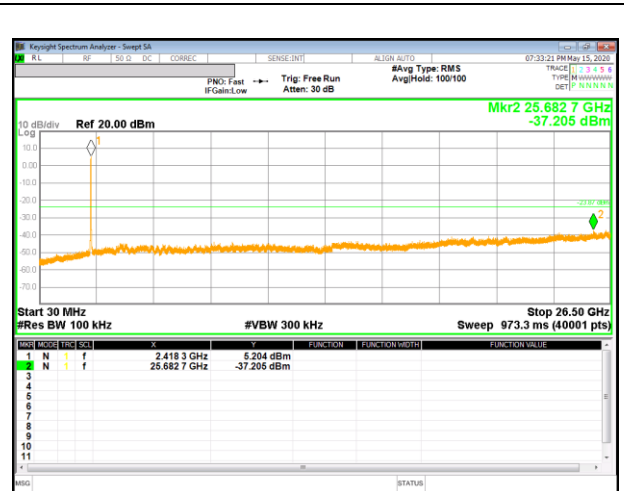


Out-Of-Band 2 Channel

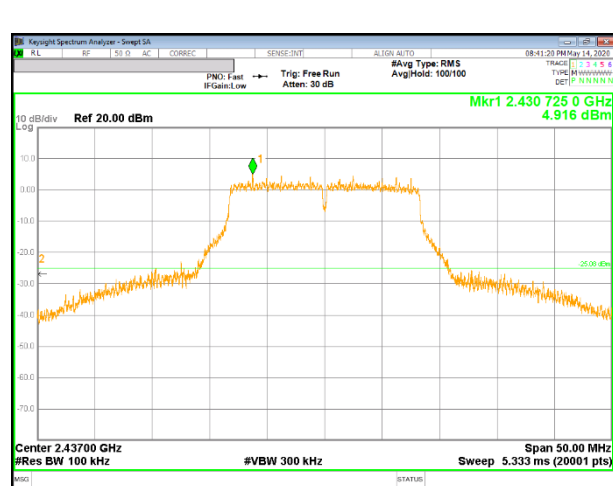


In-Band Reference Level

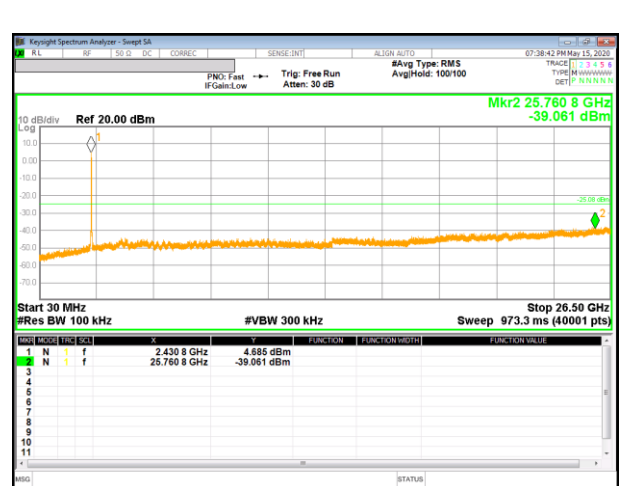


Out-Of-Band 6 Channel

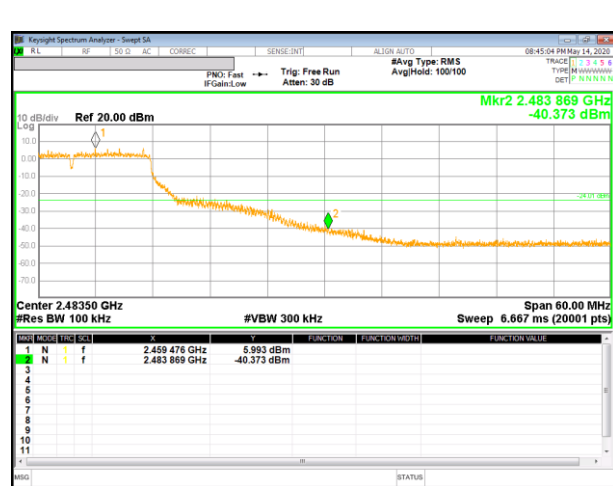


10 Channel Band-edge

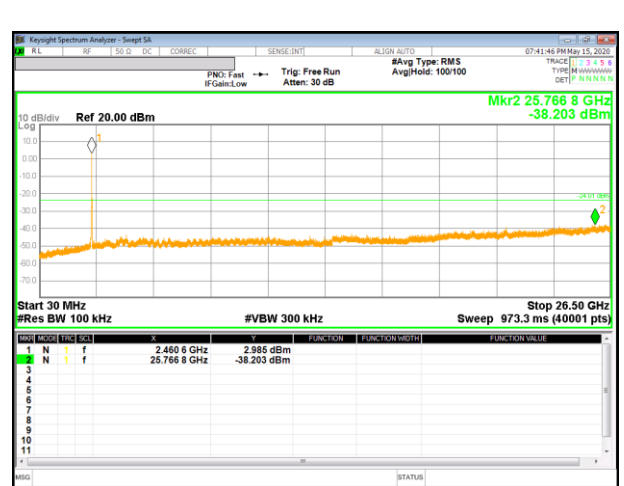


Out-Of-Band 10 Channel

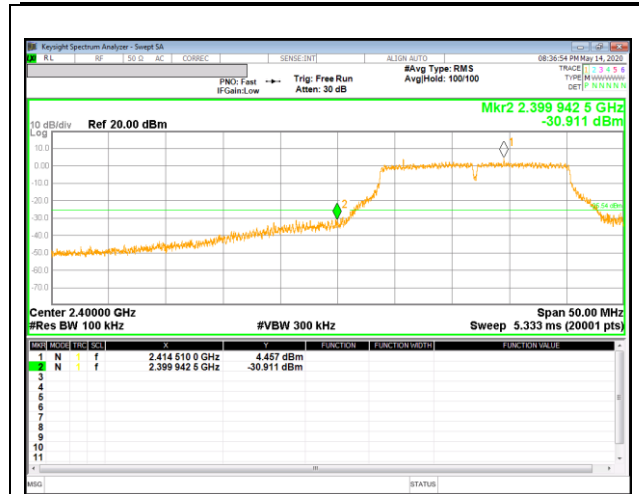


1 Channel Band-edge

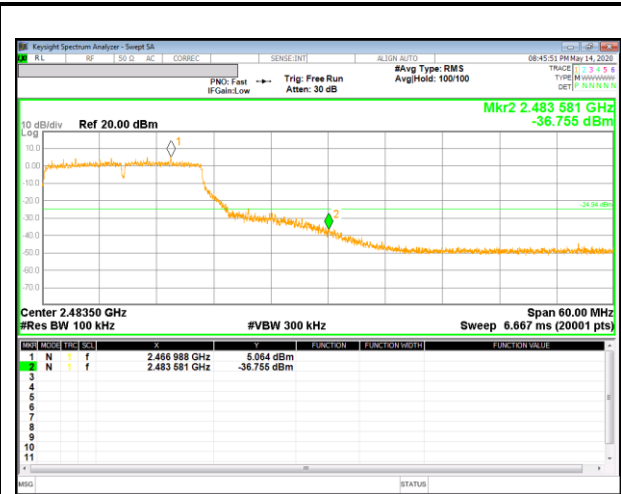

11 Channel Band-edge

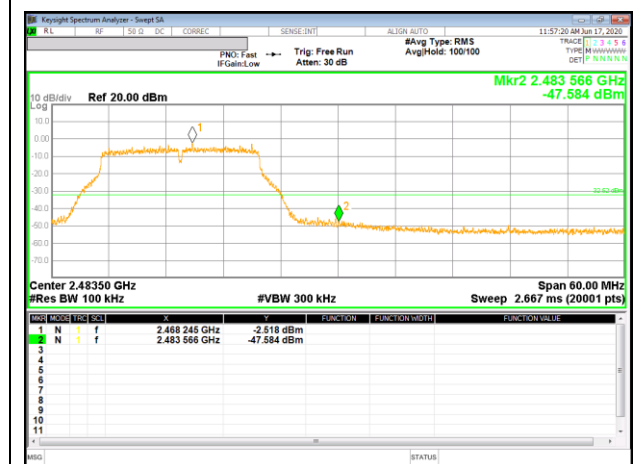


12 Channel Band-edge

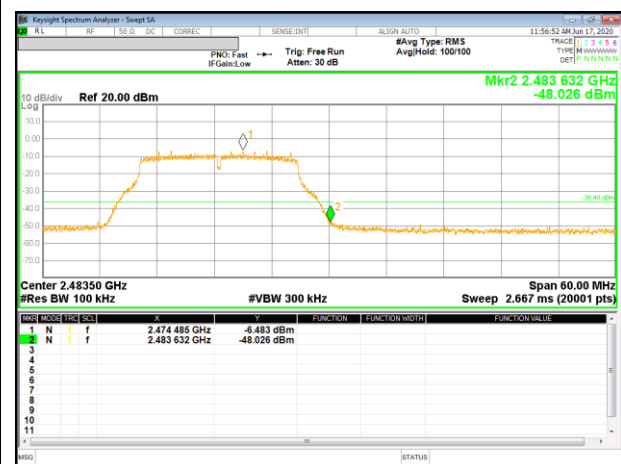


13 Channel Band-edge


9.5.3. 802.11n HT20 MODE

2TX Antenna 1 MODE

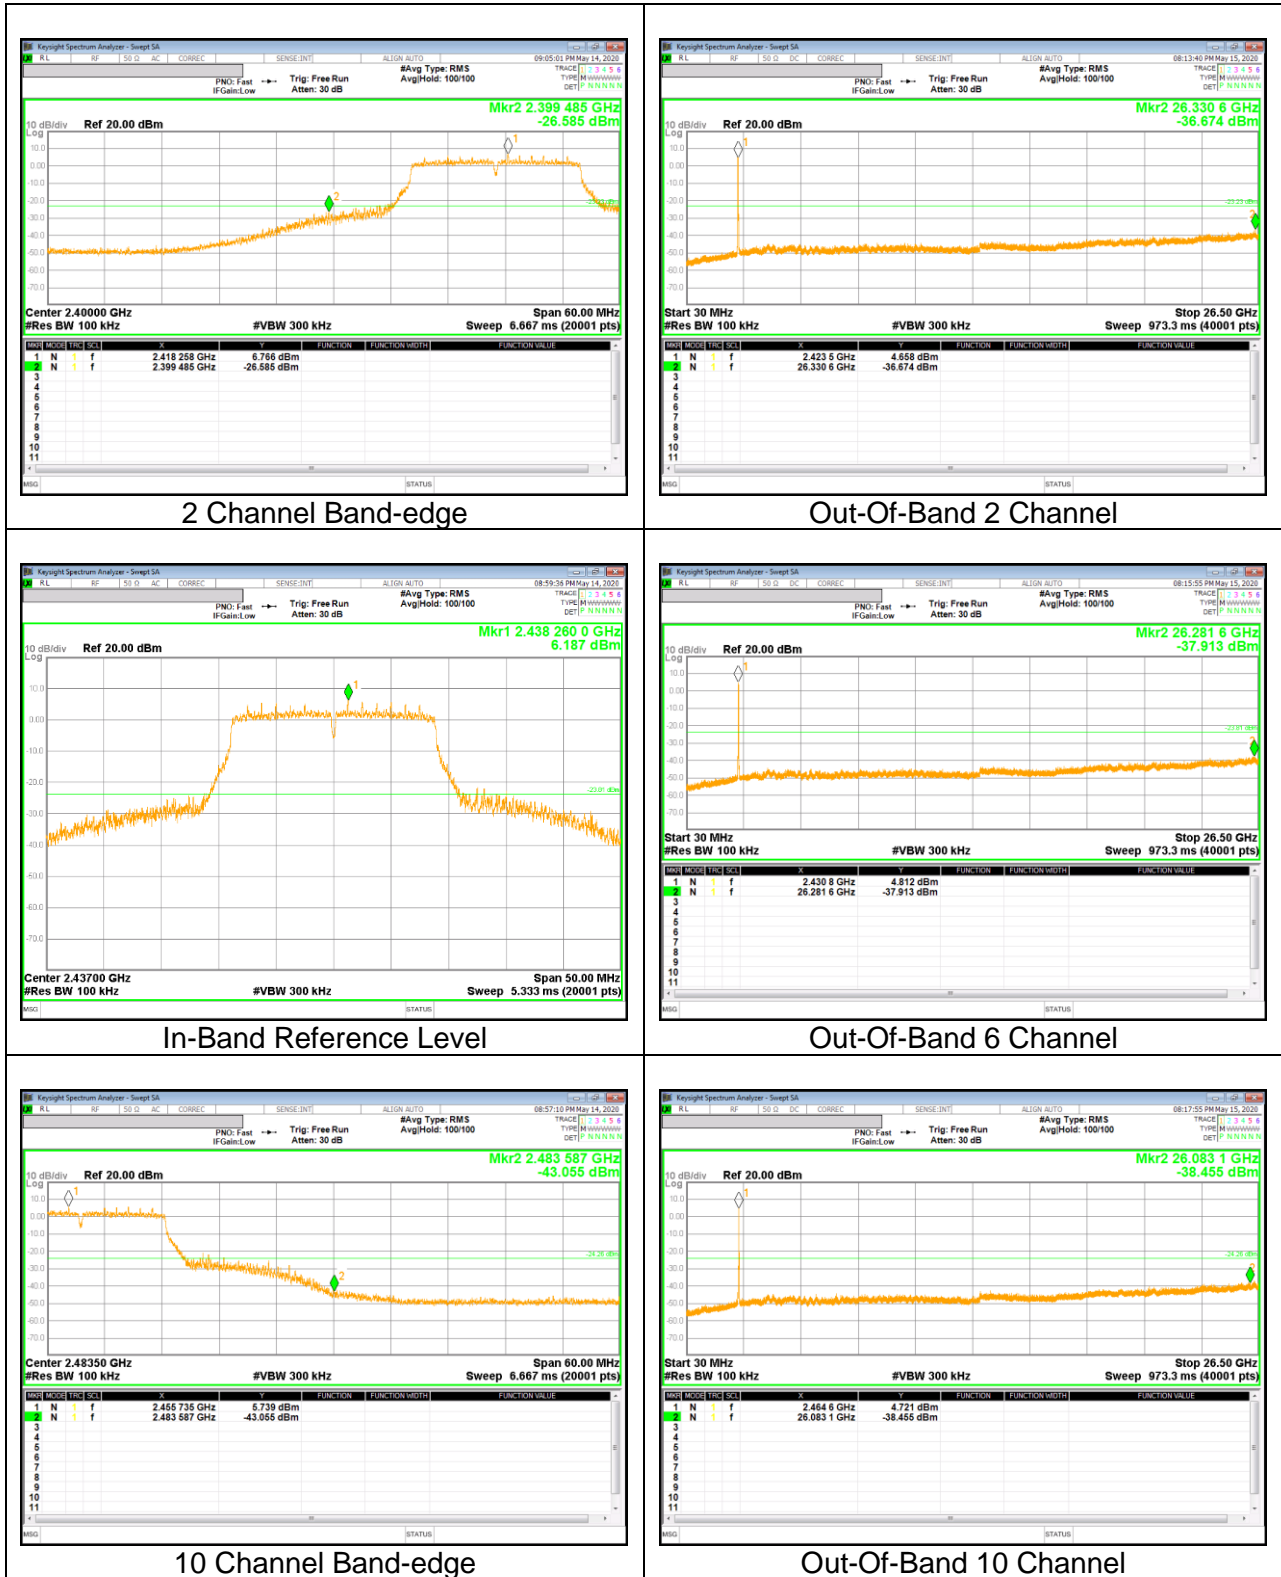


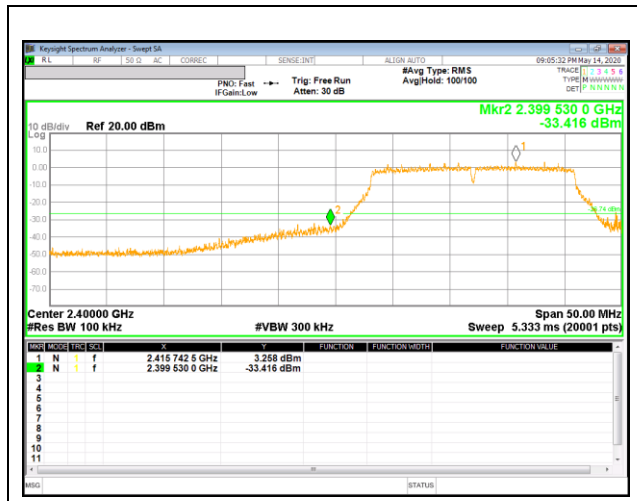


1 Channel Band-edge

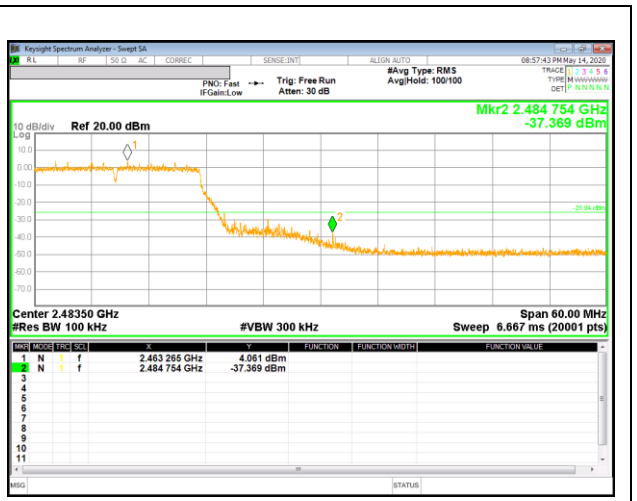

11 Channel Band-edge

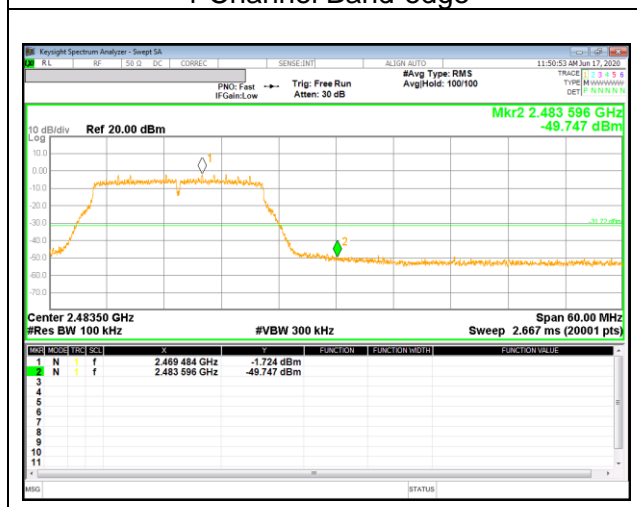


12 Channel Band-edge

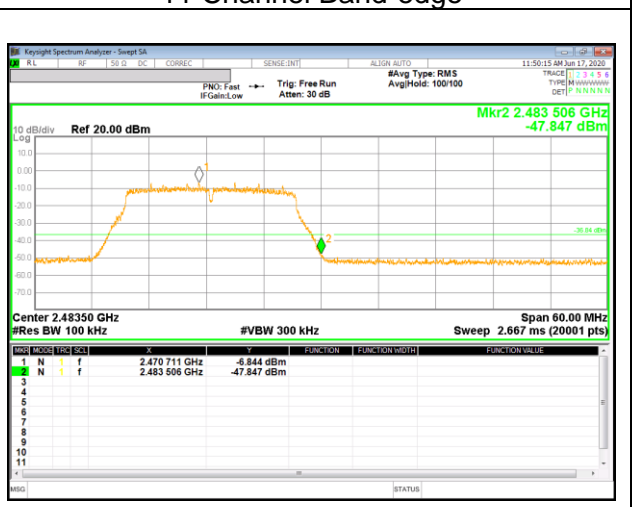


13 Channel Band-edge


2TX Antenna 2 MODE

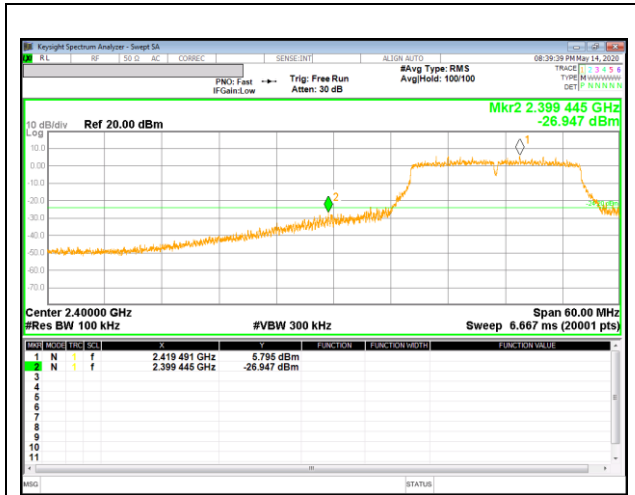


2 Channel Band-edge

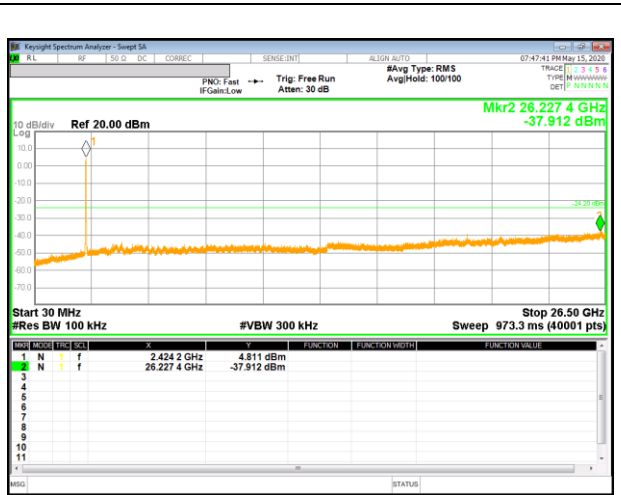


Out-Of-Band 2 Channel

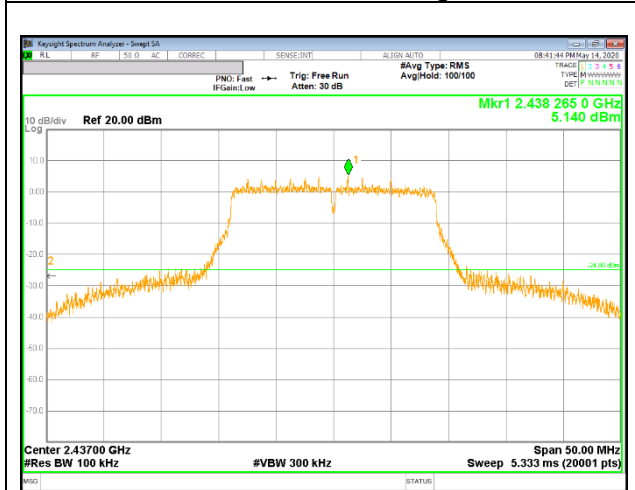


In-Band Reference Level

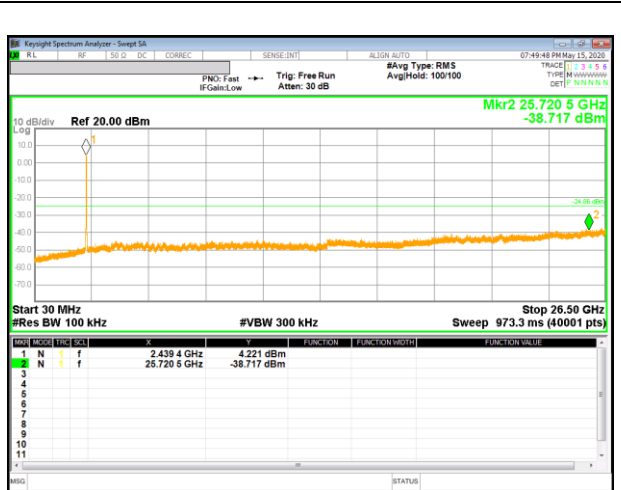


Out-Of-Band 6 Channel

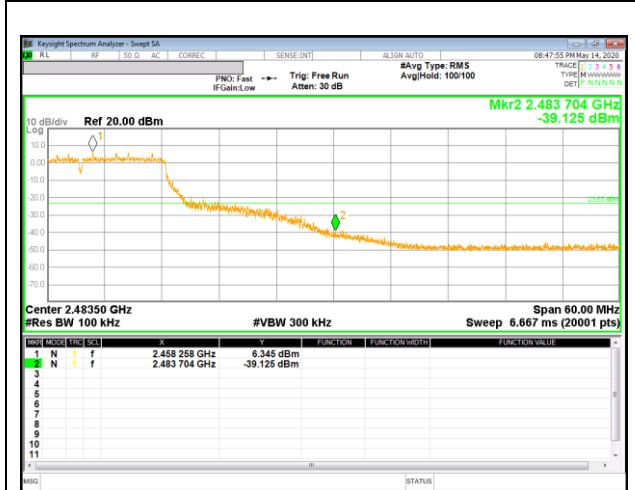


10 Channel Band-edge

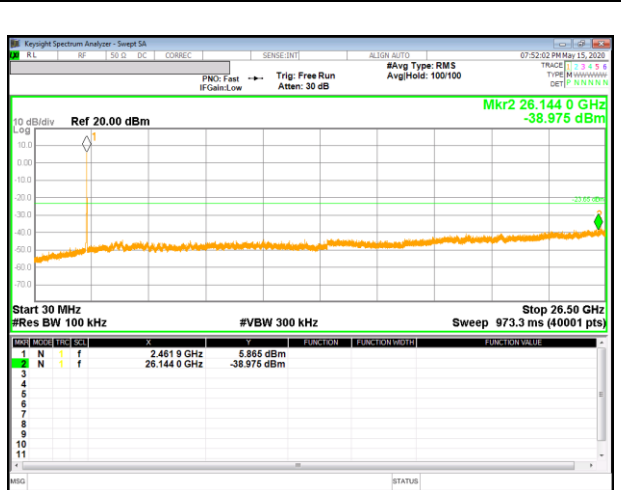


Out-Of-Band 10 Channel

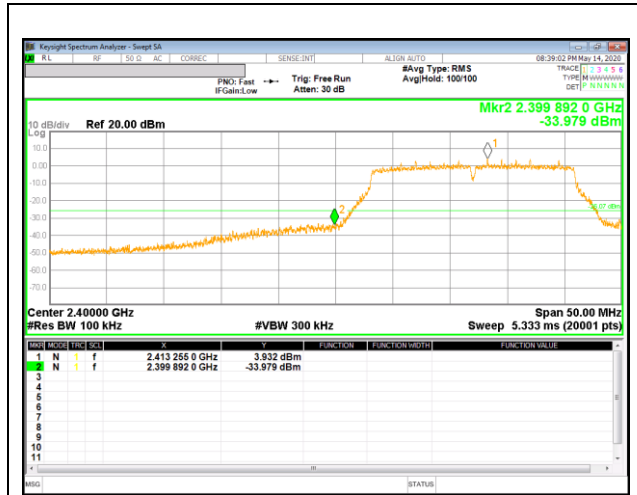


1 Channel Band-edge

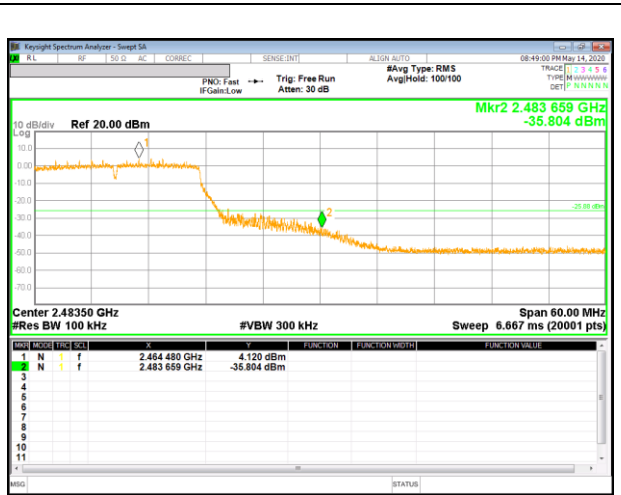

11 Channel Band-edge

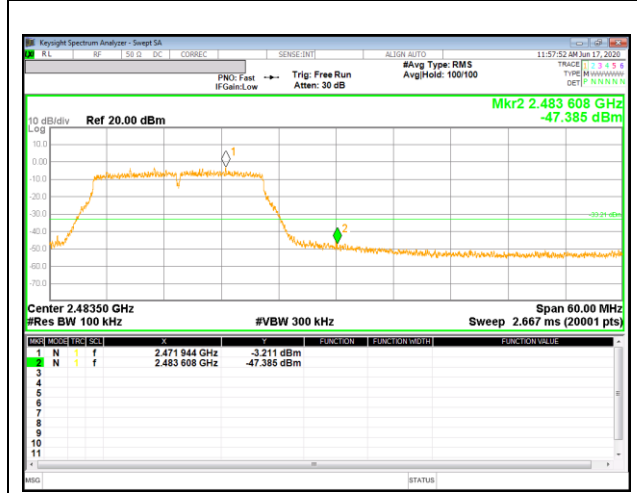


12 Channel Band-edge

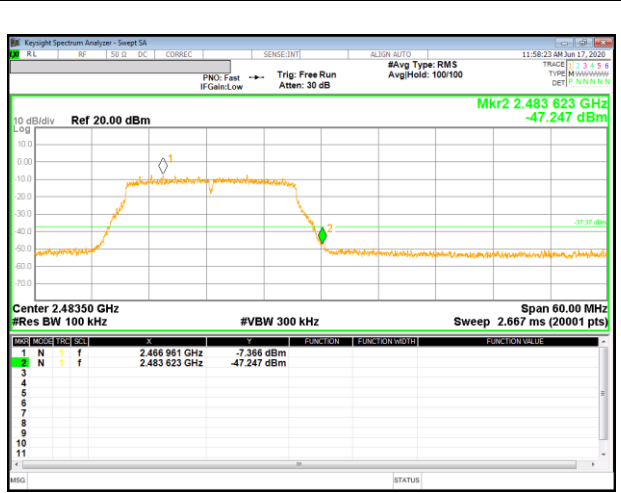


13 Channel Band-edge


9.5.4. 802.11ax HE20(SU) MODE

1TX Antenna 1 MODE

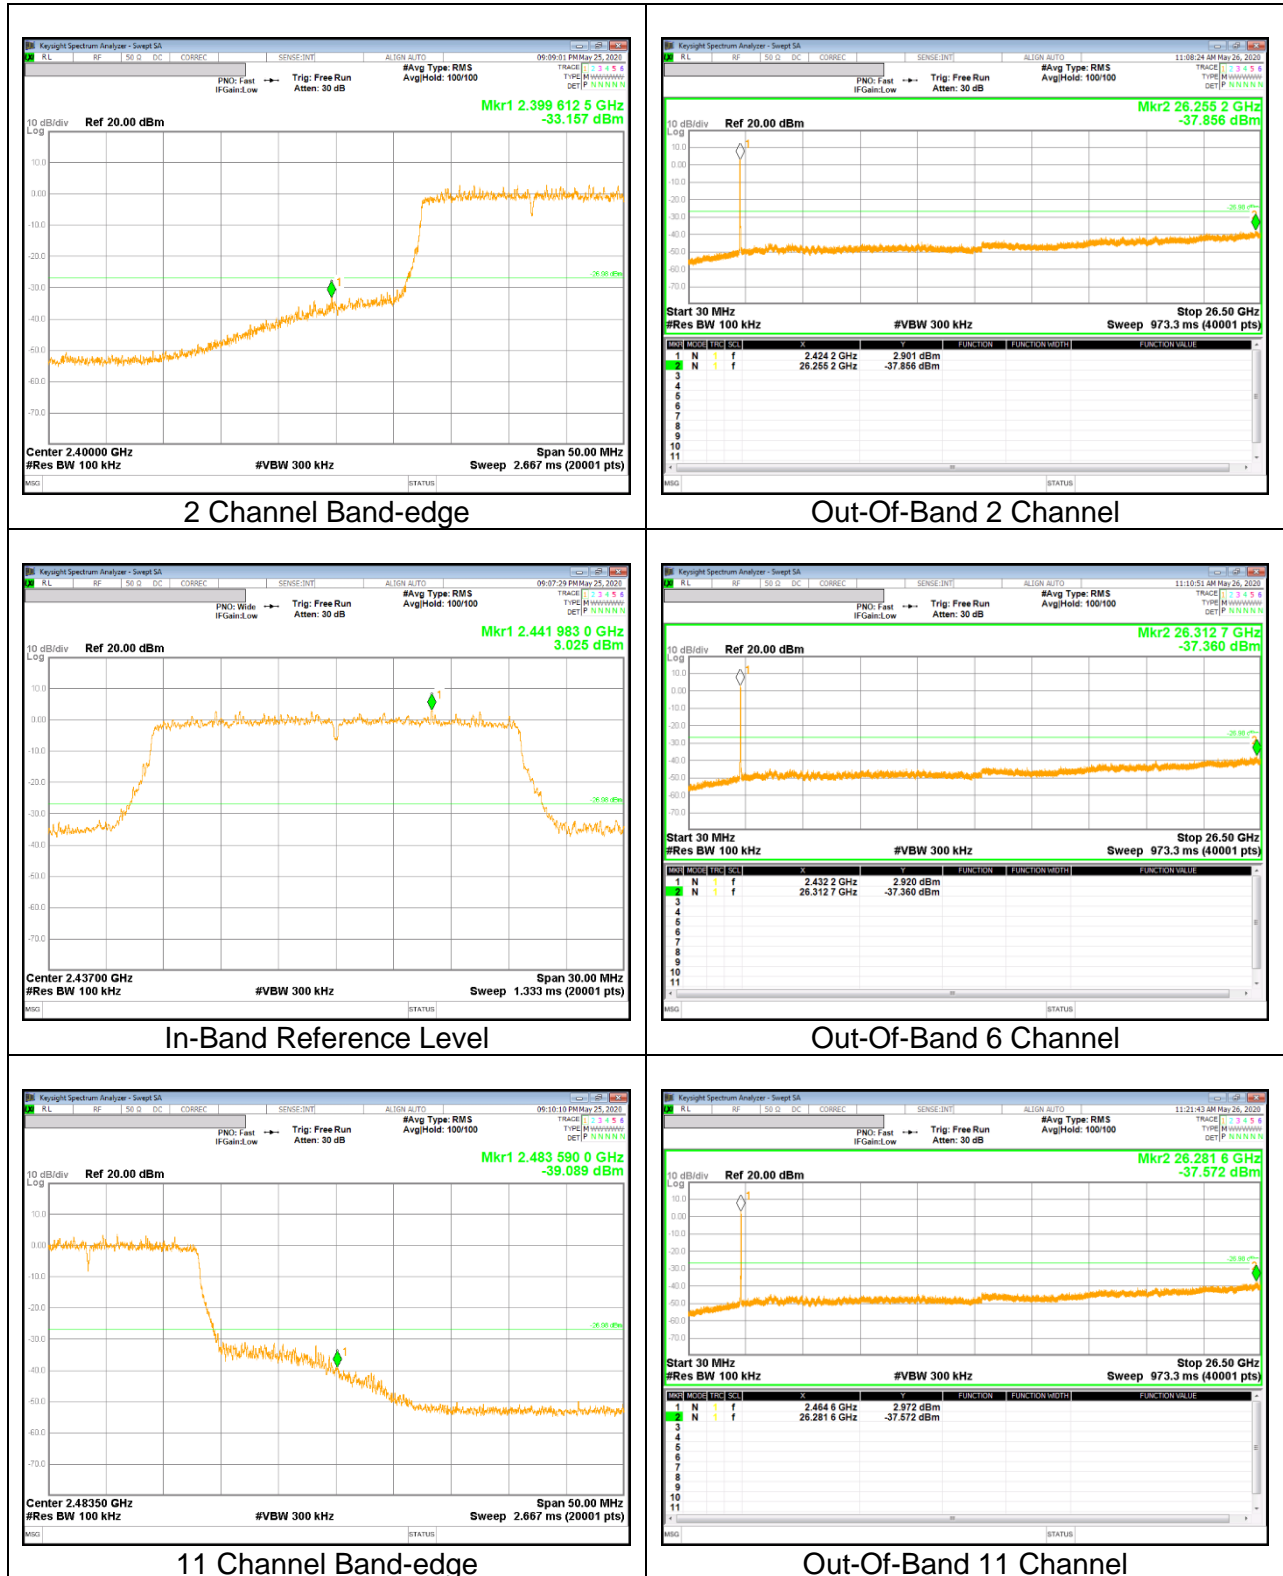


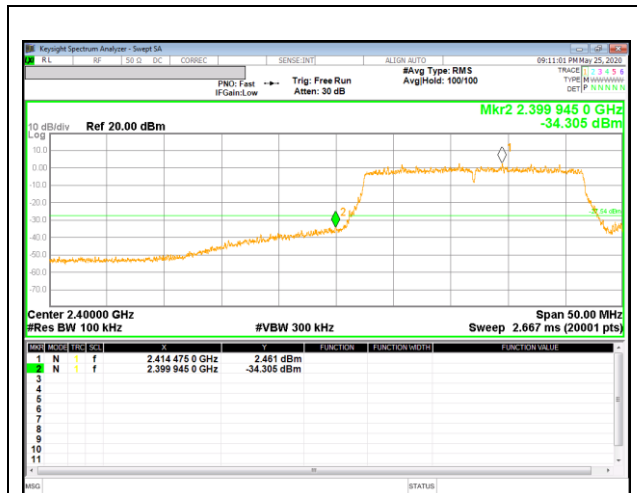

1 Channel Band-edge

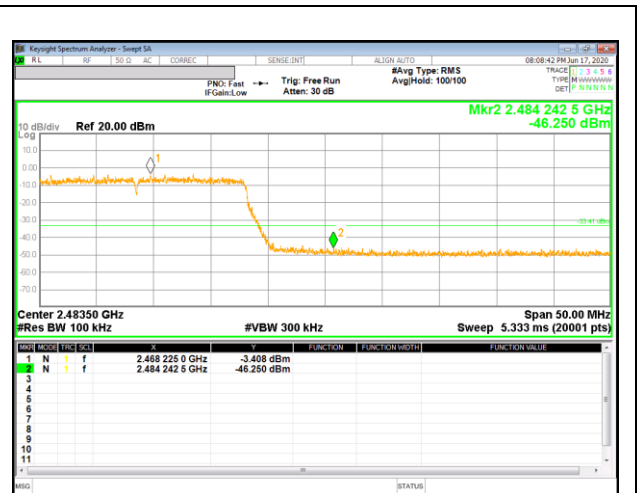


12 Channel Band-edge

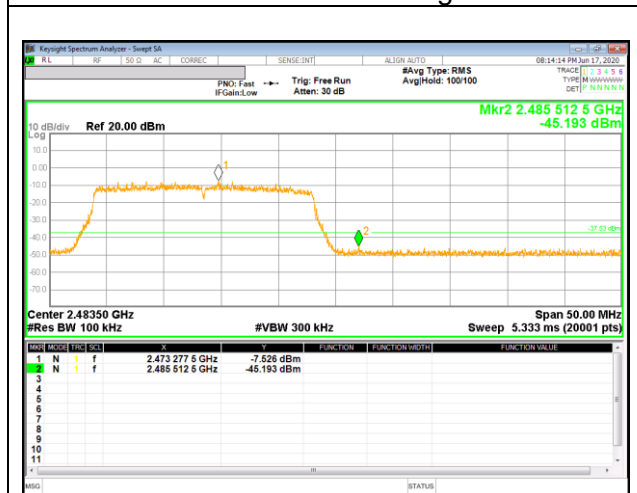


13 Channel Band-edge


1TX Antenna 2 MODE

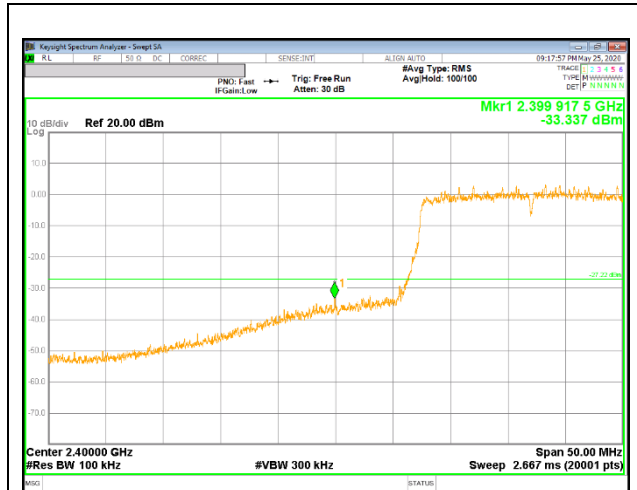


2 Channel Band-edge

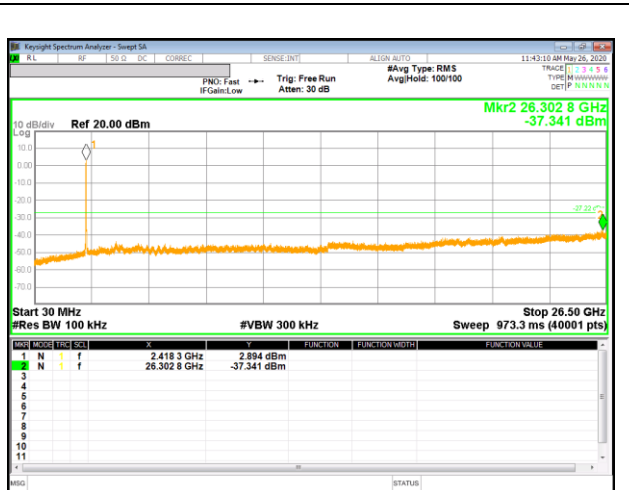


Out-Of-Band 2 Channel

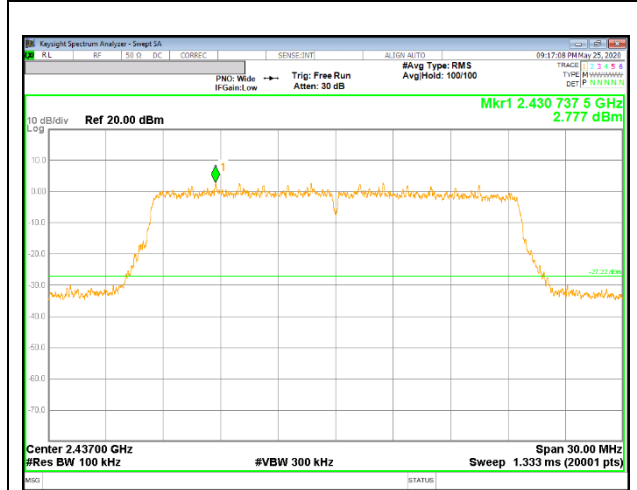


In-Band Reference Level

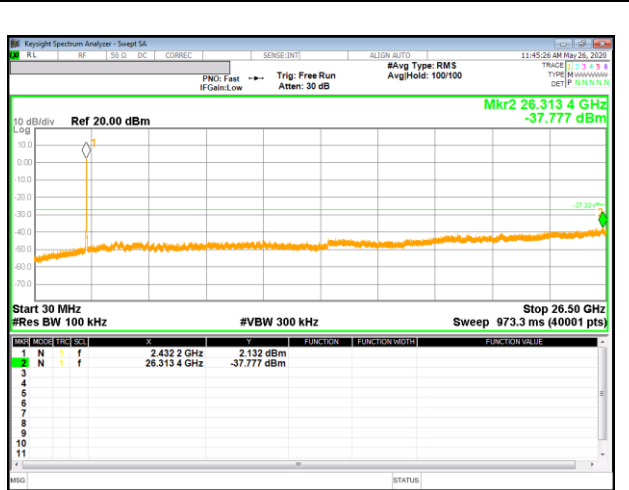


Out-Of-Band 6 Channel

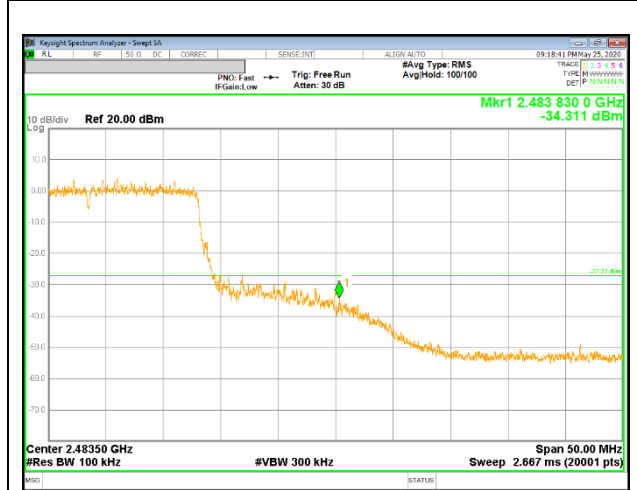


11 Channel Band-edge

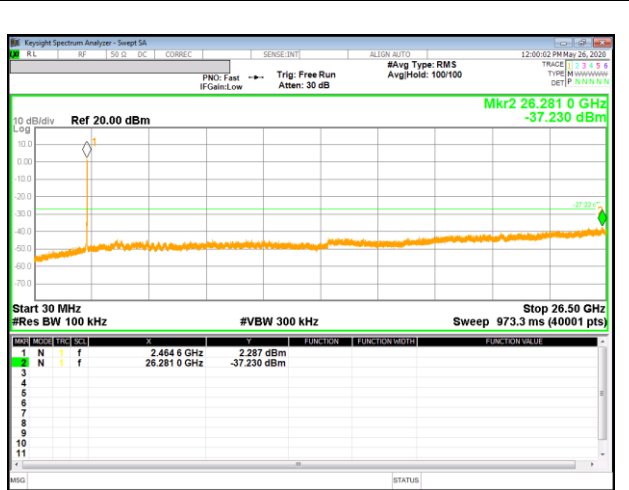


Out-Of-Band 11 Channel

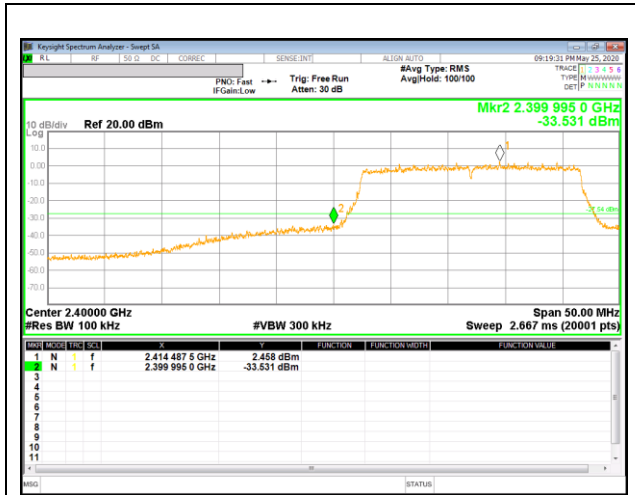

1 Channel Band-edge

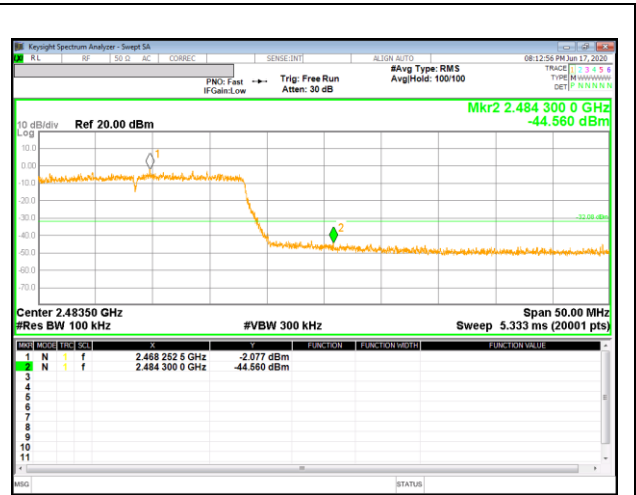


12 Channel Band-edge

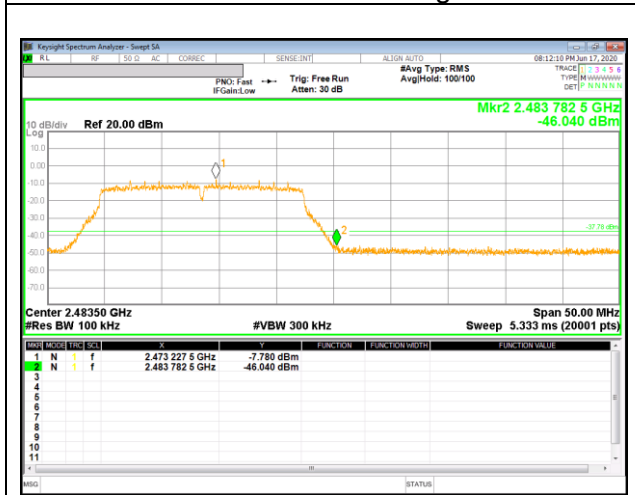


13 Channel Band-edge

9.5.5. 802.11ax HE20(RU) MODE


1TX Antenna 1 MODE

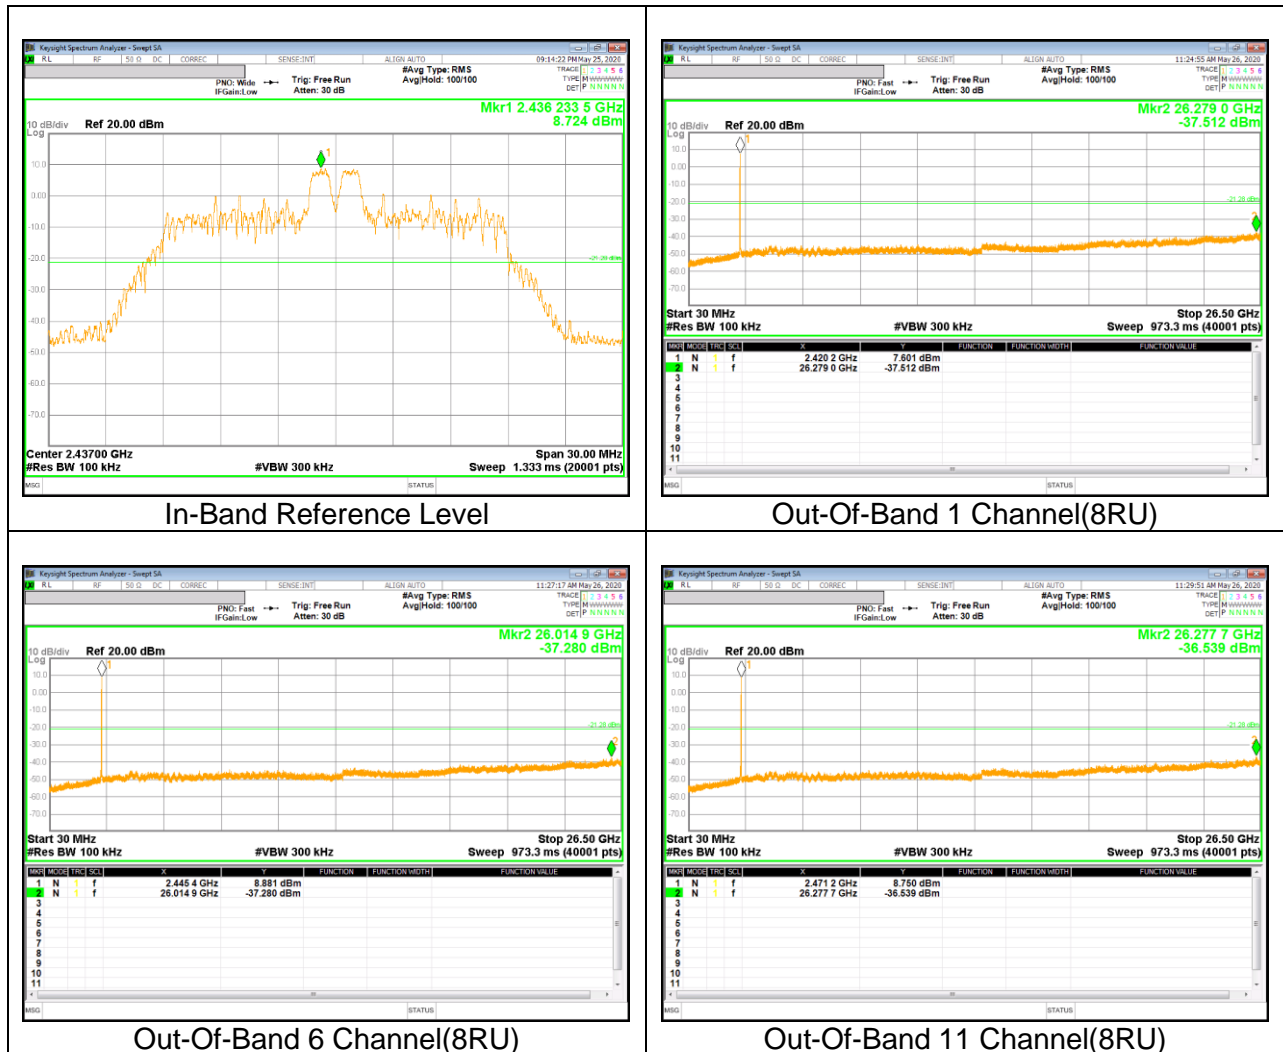


1TX Antenna 2 MODE

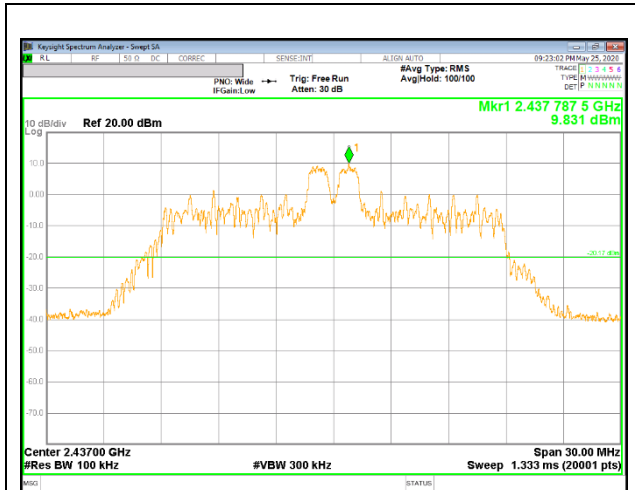


In-Band Reference Level

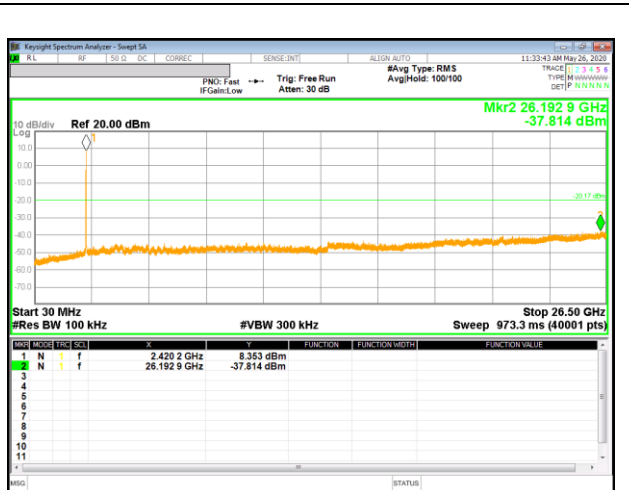

Out-Of-Band 1 Channel(8RU)

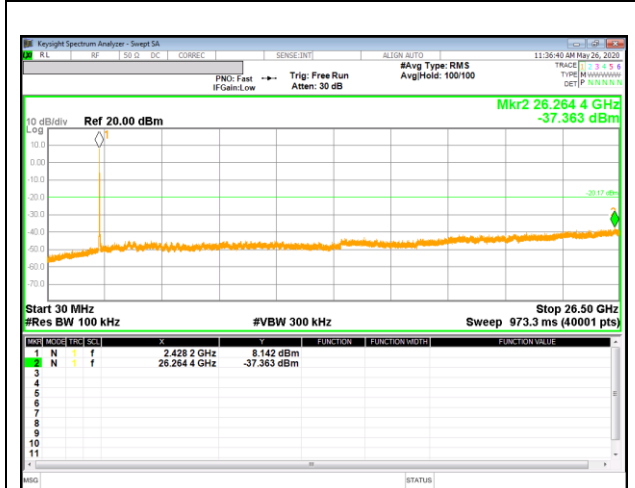

Out-Of-Band 6 Channel(0RU)

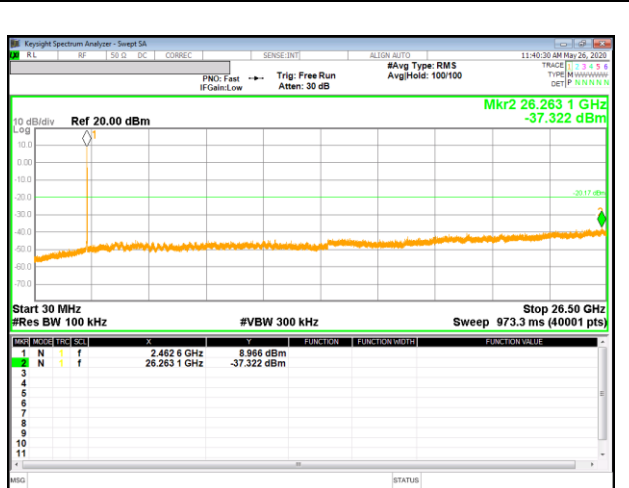

Out-Of-Band 11 Channel(4RU)

10. RADIATED TEST RESULTS

LIMITS

FCC §15.205 and §15.209

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

FCC Part 15.205 (a) : Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~ 12.52025	149.9 ~ 150.05	1645.5 ~ 1646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.57675 ~ 12.57725	156.52475 ~	1660 ~ 1710	8.025 ~ 8.5	22.01 ~ 23.12
4.17725 ~ 4.17775	13.36 ~ 13.41	156.52525	1718.8 ~ 1722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.20725 ~ 4.20775	16.42 ~ 16.423	156.7 ~ 156.9	2200 ~ 2300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	16.69475 ~ 16.69525	162.0125 ~	2310 ~ 2390	10.6 ~ 12.7	36.43 ~ 36.5
6.26775 ~ 6.26825	16.80425 ~ 16.80475	167.17	2483.5 ~ 2500	13.25 ~ 13.4	Above 38.6
6.31175 ~ 6.31225	25.5 ~ 25.67	167.72 ~ 173.2	2655 ~ 2900		
8.291 ~ 8.294	37.5 ~ 38.25	240 ~ 285	3260 ~ 3267		
8.362 ~ 8.366	73 ~ 74.6	322 ~ 335.4	3332 ~ 3339		
8.37625 ~ 8.38675	74.8 ~ 75.2	399.90 ~ 410	3345.8 ~ 3358		
		608 ~ 614	3600 ~ 4400		
		960 ~ 1240			

▪ FCC Part 15.205(b) : The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1 GHz and 150 cm for above 1 GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor for average measurements. (Restricted bandedge, Final detection of spurious harmonic emissions)

Duty cycle factor = $10\log(1/x)$ For this sample:

802.11b mode = 0 dB (duty cycle >98%);
802.11g mode = 0.15 dB (duty cycle = 96.51%);
802.11n(HT20) mode = 0.17 dB (duty cycle = 96.25%);
802.11ax(HE20) SISO SU mode = 0.21 dB(duty cycle = 95.23%);
802.11ax(HE20) MIMO SU mode = 0.40 dB(duty cycle = 91.18%);
802.11ax(HE20) SISO 26 Tone = 0 dB(duty cycle >98%);
802.11ax(HE20) MIMO 26 Tone = 0 dB(duty cycle >98%).

Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.

The spectrum from 1 GHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.
(From 30MHz to 1GHz, test was performed with the EUT set to transmit at the channel with highest output power)

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note : Emission was pre-scanned from 9 kHz to 30 MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).
Per FCC part 15.31(o), test results were not reported.

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site.
Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the one of tests made in an open field based on KDB 414788.


10.1. TRANSMITTER ABOVE 1 GHz

10.1.1. TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND

1TX Antenna 1

BANDEDGE (LOW CHANNEL, CH 1)

HORIZONTAL RESULT

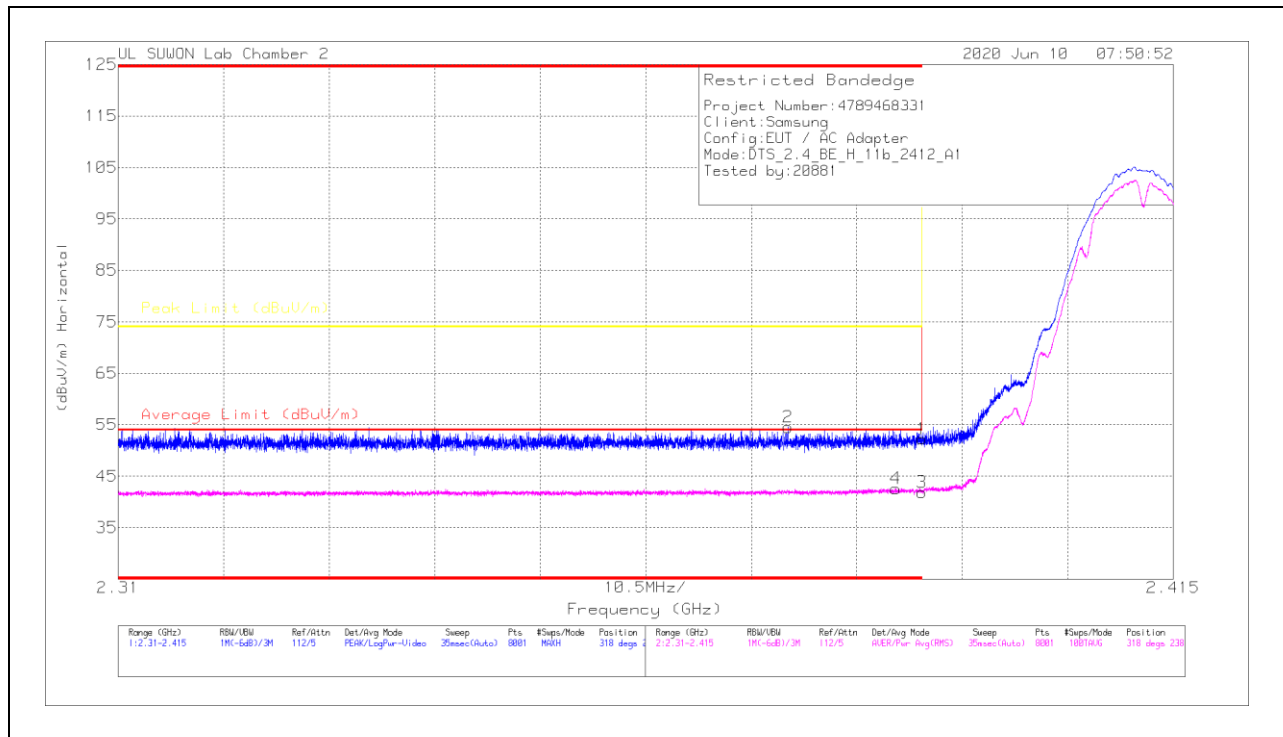


Trace Markers

Marker	Frequency (GHz)	Meas Reading (dBuV)	Det	3117_00168724	10dB_ATT(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	41.22	Pk	31.6	-20.6	0	52.22	-	-	74	-21.78	318	238	H
2	* 2.37666	43.53	Pk	31.6	-20.6	0	54.53	-	-	74	-19.47	318	238	H
3	* 2.39	30.86	RMS	31.6	-20.6	0	41.86	54	-12.14	-	-	318	238	H
4	* 2.38739	31.61	RMS	31.6	-20.6	0	42.61	54	-11.39	-	-	318	238	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

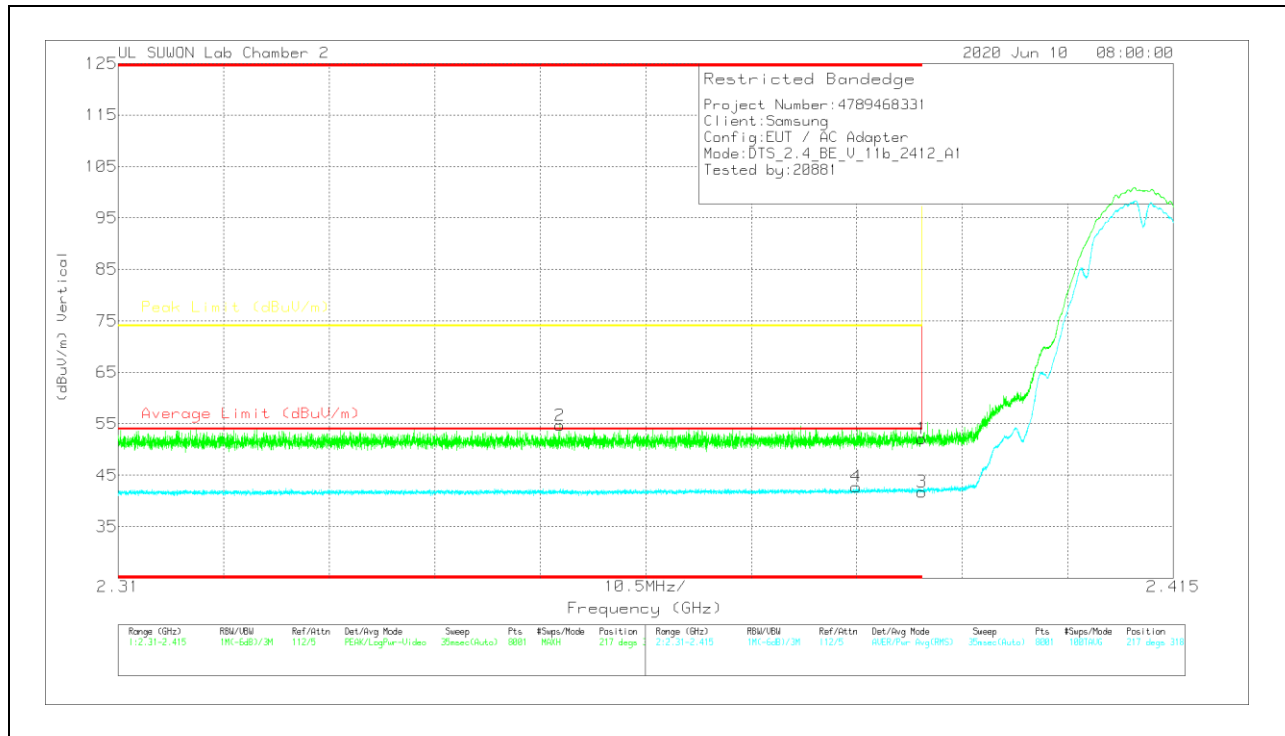


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	41.12	Pk	31.6	-20.6	0	52.12	-	-	74	-21.88	217	318	V
2	* 2.35394	43.76	Pk	31.6	-20.7	0	54.66	-	-	74	-19.34	217	318	V
3	* 2.39	30.76	RMS	31.6	-20.6	0	41.76	54	-12.24	-	-	217	318	V
4	* 2.38345	31.76	RMS	31.6	-20.6	0	42.76	54	-11.24	-	-	217	318	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

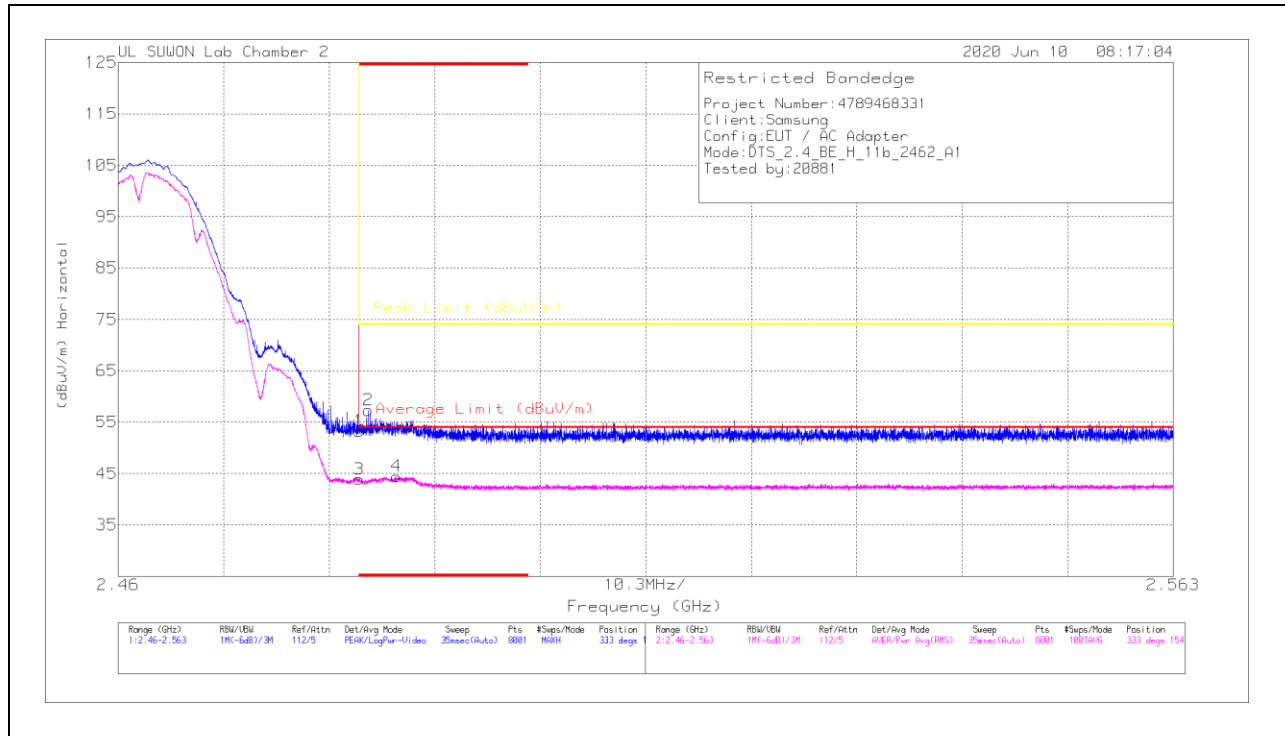

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	41.76	Pk	31.9	-20.4	0	53.26	-	-	74	-20.74	333	154	H
2	* 2.48441	45.82	Pk	31.9	-20.4	0	57.32	-	-	74	-16.68	333	154	H
3	* 2.48351	32.4	RMS	31.9	-20.4	0	43.9	54	-10.1	-	-	333	154	H
4	* 2.48717	33.08	RMS	31.9	-20.5	0	44.48	54	-9.52	-	-	333	154	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

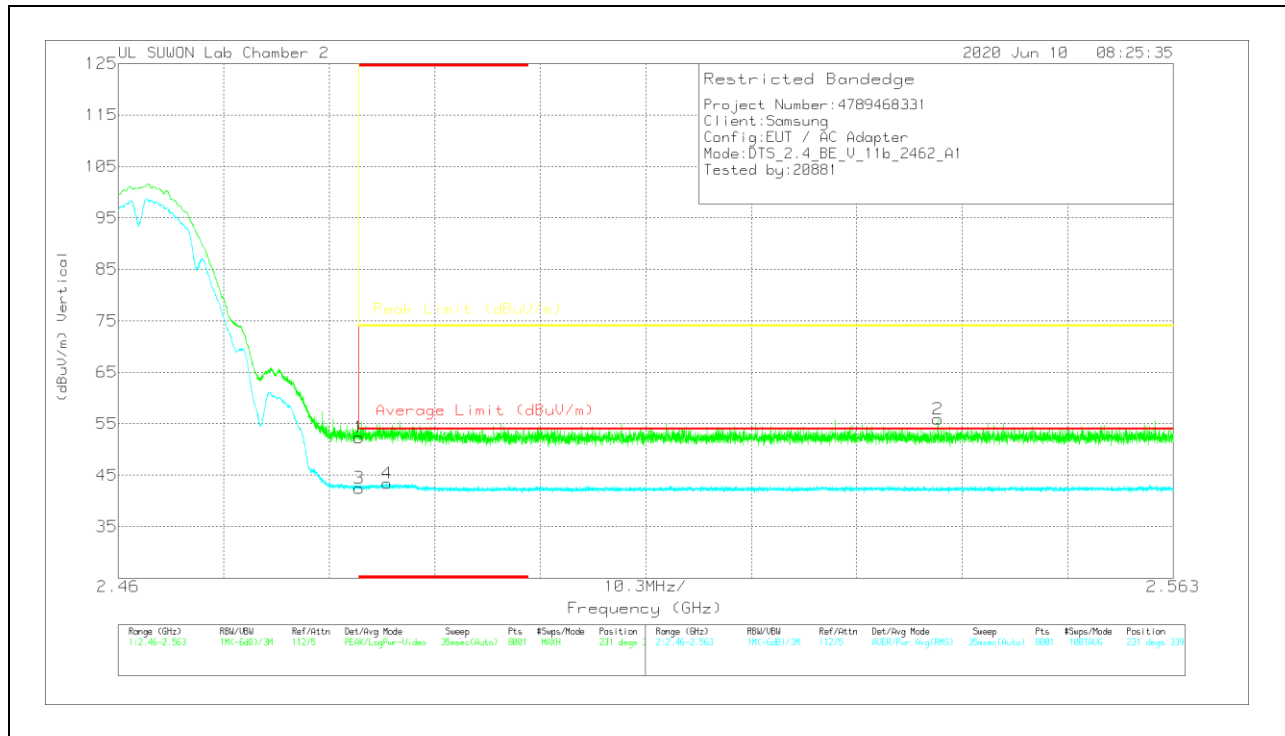


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	40.83	Pk	31.9	-20.4	0	52.33	-	-	74	-21.67	231	339	V
2	2.54002	44.41	Pk	32	-20.5	0	55.91	-	-	74	-18.09	231	339	V
3	* 2.48351	30.98	RMS	31.9	-20.4	0	42.48	54	-11.52	-	-	231	339	V
4	* 2.48627	32.03	RMS	31.9	-20.5	0	43.43	54	-10.57	-	-	231	339	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)

HORIZONTAL RESULT

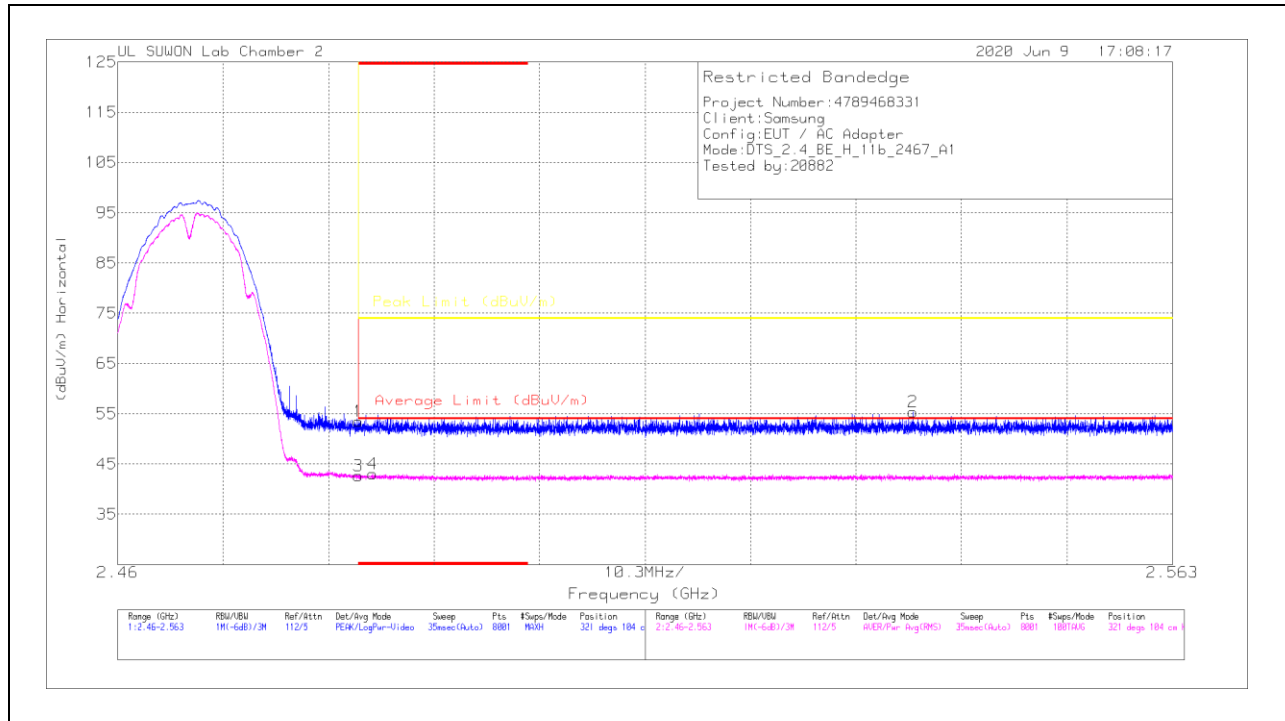

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	41.95	Pk	31.9	-20.4	0	53.45	-	-	74	-20.55	321	104	H
2	2.53769	43.86	Pk	32	-20.5	0	55.36	-	-	74	-18.64	321	104	H
3	* 2.48351	31.18	RMS	31.9	-20.4	0	42.68	54	-11.32	-	-	321	104	H
4	* 2.4849	31.58	RMS	31.9	-20.4	0	43.08	54	-10.92	-	-	321	104	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

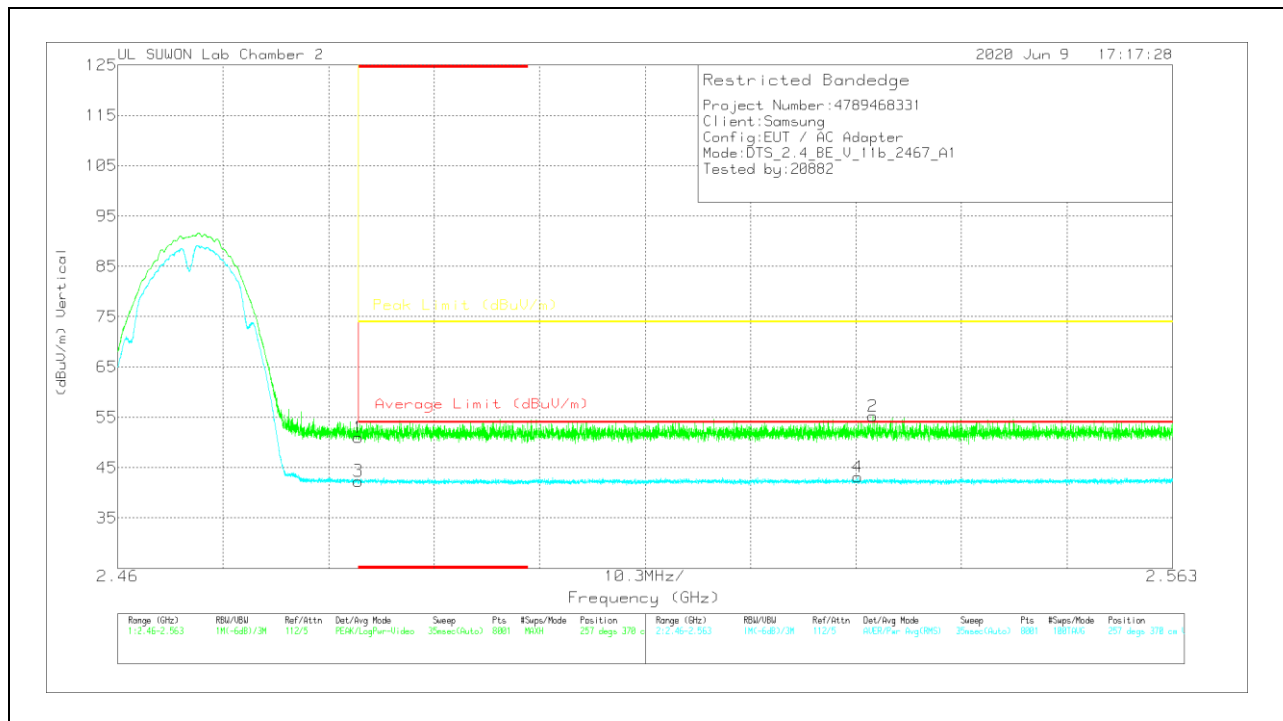


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	39.51	Pk	31.9	-20.4	0	51.01	-	-	74	-22.99	257	370	V
2	2.53375	43.6	Pk	32	-20.4	0	55.2	-	-	74	-18.8	257	370	V
3	* 2.48351	30.84	RMS	31.9	-20.4	0	42.34	54	-11.66	-	-	257	370	V
4	2.53228	31.51	RMS	32	-20.4	0	43.11	54	-10.89	-	-	257	370	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

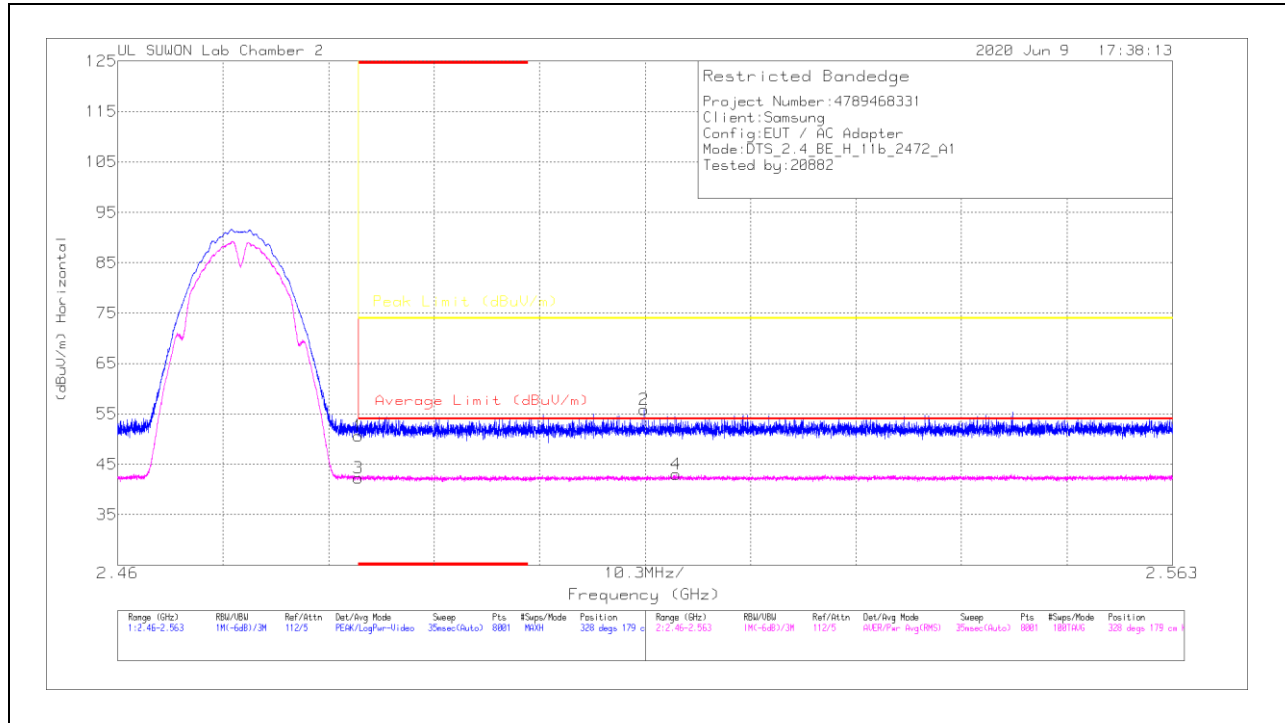


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	39.15	Pk	31.9	-20.4	0	50.65	-	-	74	-23.35	328	179	H
2	2.5114	44.48	Pk	31.9	-20.5	0	55.88	-	-	74	-18.12	328	179	H
3	* 2.48351	30.74	RMS	31.9	-20.4	0	42.24	54	-11.76	-	-	328	179	H
4	2.51454	31.57	RMS	31.9	-20.4	0	43.07	54	-10.93	-	-	328	179	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

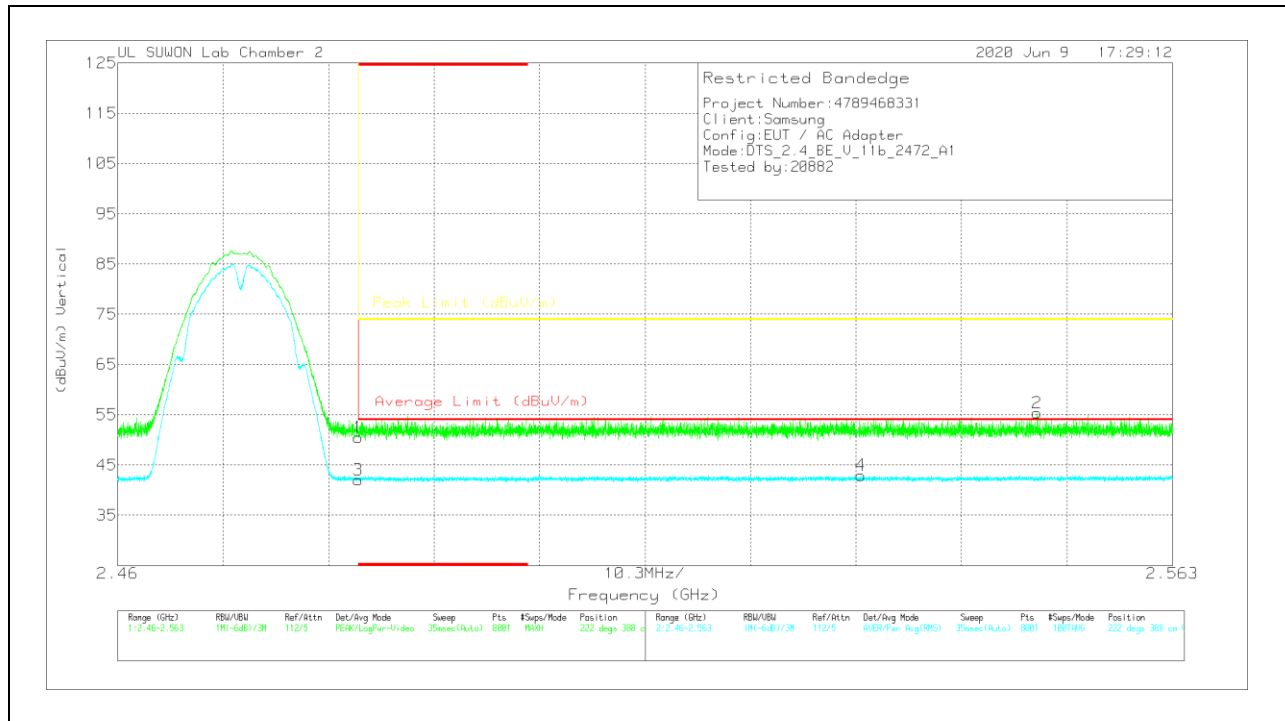



Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	38.99	Pk	31.9	-20.4	0	50.49	-	-	74	-23.51	222	388	V
2	2.5498	43.88	Pk	32	-20.5	0	55.38	-	-	74	-18.62	222	388	V
3	* 2.48351	30.48	RMS	31.9	-20.4	0	41.98	54	-12.02	-	-	222	388	V
4	2.53255	31.36	RMS	32	-20.4	0	42.96	54	-11.04	-	-	222	388	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL, CH 1 RESULTS

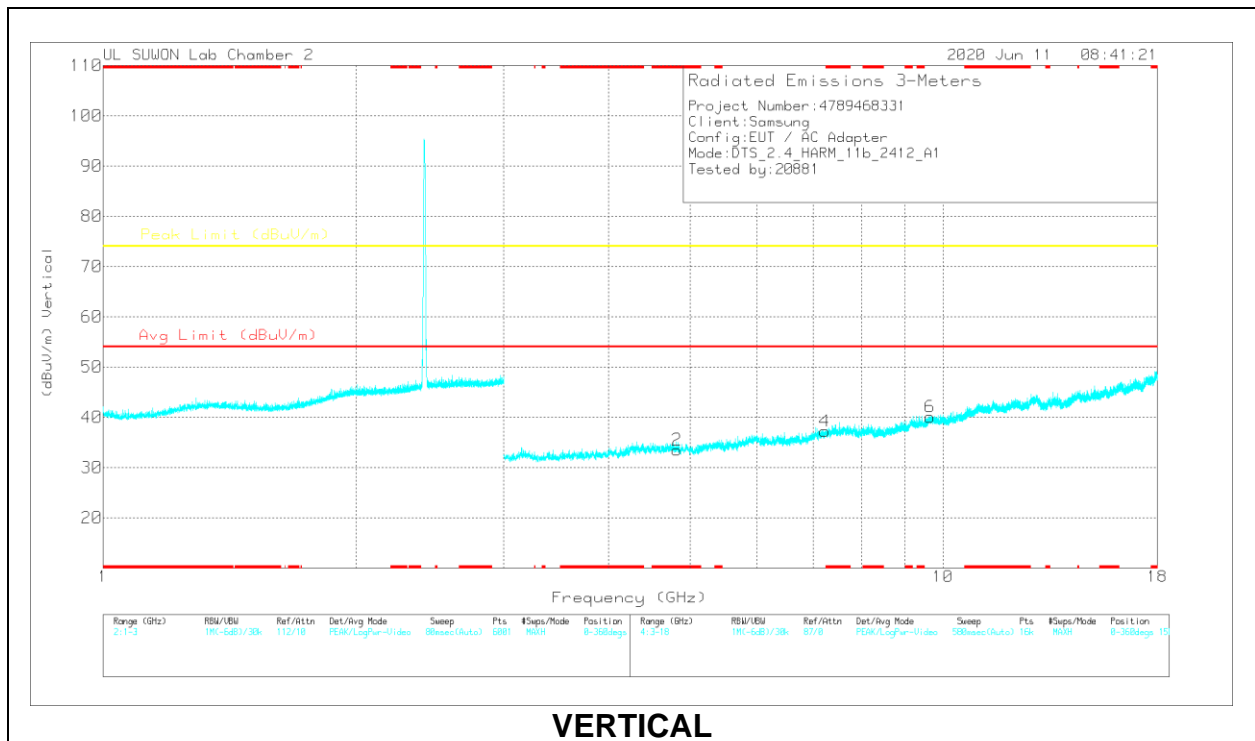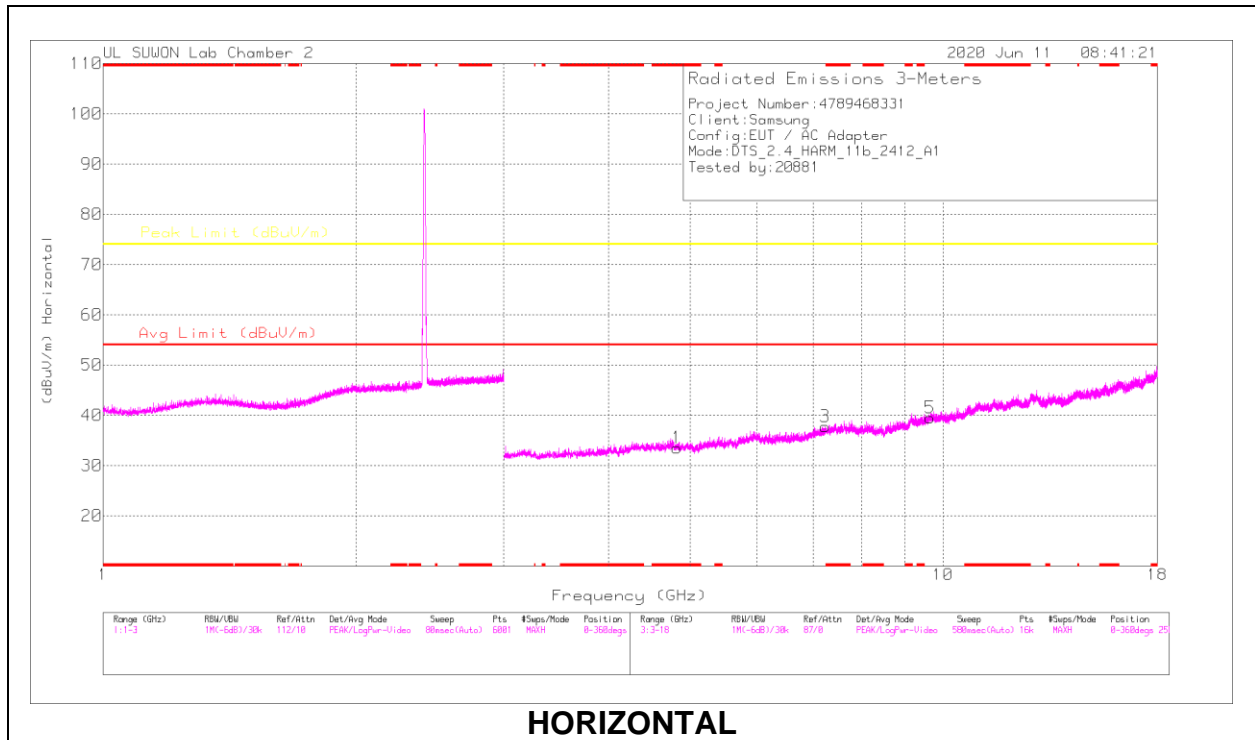

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.