



CERTIFICATION TEST REPORT

Report Number. : 4790136529-E7V2

Applicant : SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Model : SM-N985F1/DS, SM-N985F1

FCC ID : A3LSMN985F1

EUT Description : GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, NFC,
WPT and UWB

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C

Date Of Issue:

2021-11-19

Prepared by:

UL Korea, Ltd.

26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory

218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea

TEL: (031) 337-9902

FAX: (031) 213-5433



ACCREDITED

Testing Laboratory

TL-637

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	2021-11-12	Initial issue	Hyunsik Yun
V2	2021-11-19	Updated to address TCB's question	Hyunsik Yun

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
1.1. INTRODUCTION OF TEST DATA REUSE	5
1.2. DIFFERENCE	5
1.3. SPOT CHECK VERIFICATION DATA.....	5
1.4. REFERENCE DETAIL.....	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION.....	8
4.2. SAMPLE CALCULATION.....	8
4.3. MEASUREMENT UNCERTAINTY	8
4.4. DECISION RULE	8
5. EQUIPMENT UNDER TEST	9
5.1. DESCRIPTION OF EUT.....	9
5.2. MAXIMUM E-FIELD STRENGTH.....	9
5.3. WORST-CASE CONFIGURATION AND MODE	9
5.4. DESCRIPTION OF TEST SETUP.....	10
6. TEST AND MEASUREMENT EQUIPMENT	11
7. 20dB BANDWIDTH.....	12
8. RADIATED EMISSION TEST RESULTS.....	13
8.1. LIMITS AND PROCEDURE	13
8.1.1. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz)	15
8.1.2. SPURIOUS EMISSION 0.009 TO 30 MHz.....	16
8.1.3. TX SPURIOUS EMISSION 30 TO 1000 MHz	17
8.1.4. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz) [EUT with passive TAG mode]	18
8.1.5. SPURIOUS EMISSION 0.09 TO 30 MHz [EUT with passive TAG mode].....	19
8.1.6. TX SPURIOUS EMISSION 30 TO 1000 MHz [EUT with passive TAG mode]	20
9. AC MAINS LINE CONDUCTED EMISSIONS.....	21
10. FREQUENCY STABILITY	26

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, NFC, WPT and UWB

MODEL NUMBER: SM-N985F1/DS, SM-N985F1

SERIAL NUMBER: R3CR90Y67BD (RADIATED, Original);
R38R900W1GJ (RADIATED, Spot-Check)

DATE TESTED: 2021-10-27 ~ 2021-11-05(Original);
2021-11-03 ~ 2021-11-12(Spot-Check);

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



Seokhwan Hong
Suwon Lab Engineer
UL Korea, Ltd.

Tested By:



Hyunsik Yun
Suwon Lab Engineer
UL Korea, Ltd.

1.1. INTRODUCTION OF TEST DATA REUSE

This report referenced from the FCC ID: A3LSMN986B1 DXX NFC(FCC CFR 47 Part 15C). And the applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID.

1.2. DIFFERENCE

The FCC ID: A3LSMN985F1 shares the same enclosure and circuit board as FCC ID: A3LSMN986B1. The NFC antennas and surrounding circuitry and layout are identical between these two units.

After confirming through preliminary radiated emissions that the performance of the FCC ID: A3LSMN986B1 remains representative of FCC ID: A3LSMN985F1. The test data of FCC ID: A3LSMN986B1 being submitted for this application to cover NFC features.

1.3. SPOT CHECK VERIFICATION DATA

(Worst case of the radiated fundamental and radiated spurious emissions)

Band	Test Item	Mode	Frequency	Test Limit	Original model		Spot check model	Deviation	Remark
					SM-N986B1/DS Results				
					SM-N986B1/DS Results	SM-N985F1/DS Results			
					FCC ID : A3LSMN986B1	FCC ID : A3LSMN985F1			
NFC	FUND	With Tag	13.56 MHz	84.00 dBuV/m	16.53 dBuV/m	15.66 dBuV/m	-0.87 dB		
	FUND	Without Tag	13.56 MHz	84.00 dBuV/m	13.85 dBuV/m	14.75 dBuV/m	0.90 dB		
	RSE	With Tag	40.67 MHz	40.00 dBuV/m	36.06 dBuV/m	34.51 dBuV/m	-1.55 dB		

Comparison of two models, upper deviation is within 3 dB range and all test results are under FCC Technical Limits.

1.4. REFERENCE DETAIL

Reference application that contains the reused reference data in the individual test reports:

Equipment Class	Reference FCC ID (Parent)	Application Type	Reference Test report number	Exhibit Type	Variant Test Report Number	Data Re-used
PCE	A3LSMN986B1	Original Grant	4790136523-E3	Test Report	4790136529-E3	All
DTS	A3LSMN986B1	Original Grant	4790136523-E4 (802.11b/g/n/ax)	Test Report	4790136529-E4 (802.11b/g/n/ax)	All
			4790136523-E5 Bluetooth LE	Test Report	4790136529-E5 Bluetooth LE	All
DSS	A3LSMN986B1	Original Grant	4790136523-E6 (Bluetooth)	Test Report	4790136529-E6 (Bluetooth)	All
DXX	A3LSMN986B1	Original Grant	4790136523-E7 (NFC)	Test Report	4790136529-E7 (NFC)	All
NII	A3LSMN986B1	Original Grant	4790136523-E8 (802.11a/n/ac/ax)	Test Report	4790136529-E8 (802.11a/n/ac/ax)	All
DCD	A3LSMN986B1	Original Grant	4790136523-E9 (WPT)	Test Report	4790136529-E9 (WPT)	All
UWB	A3LSMN986B1	Original Grant	4790136523-E10 (UWB)	Test Report	4790136529-E10 (UWB)	All

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. ANSI C63.10-2013.
4. 414788 D01 Radiated Test Site v01r01

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1
<input checked="" type="checkbox"/>	Chamber 2
<input type="checkbox"/>	Chamber 3

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.02 dB
Radiated Disturbance, 9 kHz to 30 MHz	1.72 dB
Radiated Disturbance, 30 MHz to 1 GHz	4.05 dB

Uncertainty figures are valid to a confidence level of 95%.

4.4. DECISION RULE

Decision rule for statement(s) of conformity is based on Procedure 2, Clause 4.4.3 in IEC Guide 115:2007.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, NFC, WPT and UWB. This test report addresses the DXX (NFC) operational mode.

This report covers the Samsung models SM-N986B1/DS, SM-N986B1. These models are identical in hardware except SM-N986B1/DS is supported dual SIM tray and SM-N986B1 has single SIM tray. All series model was same hardware thus, SM-N986B1/DS(Dual SIM tray) was set for final test.

5.2. MAXIMUM E-FIELD STRENGTH

The testing was performed at 3 meter. The transmitter maximum E-field at 30m distance is 16.53 dBuV/m which convert from 3 meter data.

5.3. WORST-CASE CONFIGURATION AND MODE

The NFC function was tested at its' fundamental and only operational frequency of 13.56 MHz.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that the Y orientation was the worst-case orientation; therefore all final radiated testing was performed with the EUT in the Y orientation while generating continuous emissions.

The fundamental level of the EUT was investigated each type and bitrate. All test was performed worst case condition(type A and bit rate 106 kbps).

Radiated(fundamental level and spurious emissions) tests were performed both without reading a passive tag condition[test mode] and with reading a passive tag condition.

5.4. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA800	R37R38J4A28SE3	N/A
Data Cable	SAMSUNG	EP-DG980	N/A	N/A


I/O CABLE

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0 m	N/A

The EUT is a stand-alone device configured and tested in a worst-case setup.

Note: Worst case is using worst case orientation with AC charger attached to the EUT with NFC signal continuously transmitting.

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

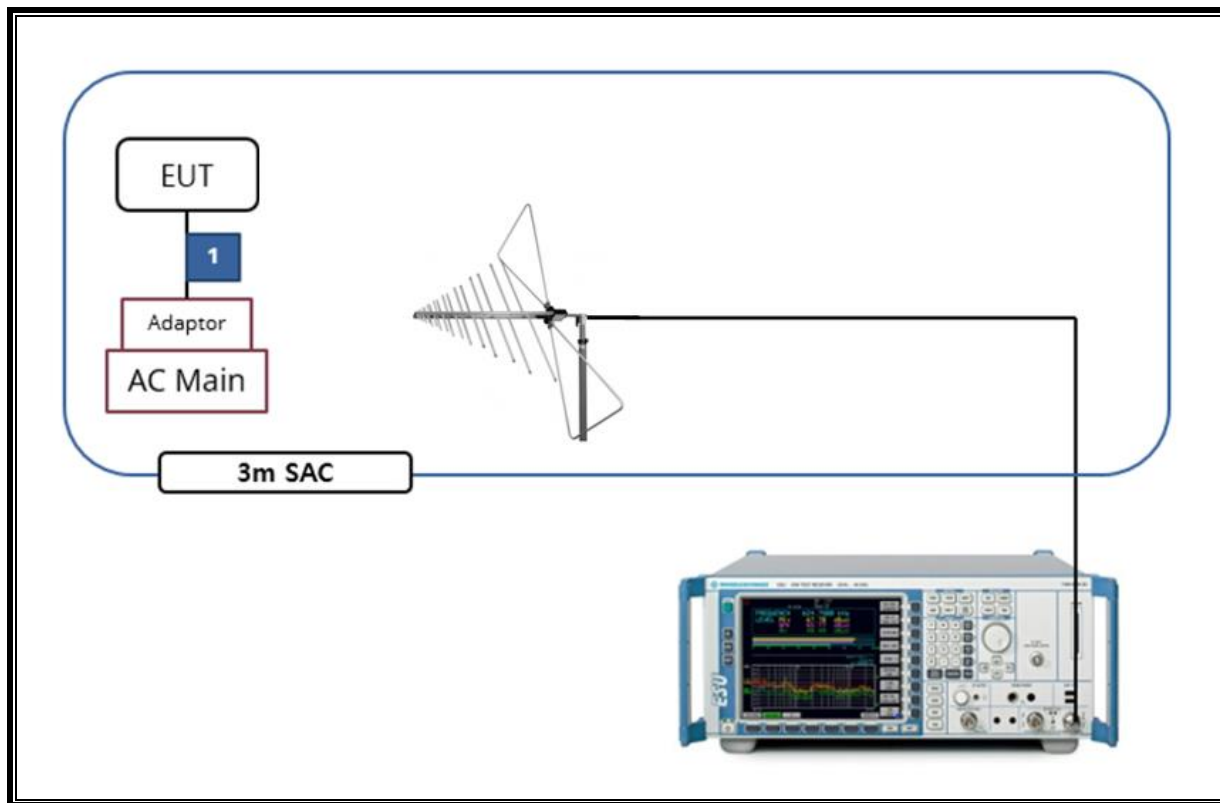

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	2022-08-13
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	2022-08-13
Preamplifier, 1000 MHz	Sonoma	310N	341282	2022-08-02
Preamplifier, 1000 MHz	Sonoma	310N	351741	2022-08-02
Spectrum Analyzer, 7 GHz	Agilent / HP	N9010A	MY542200580	2022-08-02
EMI Test Receive, 3 GHz	R&S	ESR3	101832	2022-08-02
DC Power Supply	Agilent / HP	E3640A	MY54226395	2022-08-02
Temperature Chamber	ESPEC	SH-642	93001109	2022-08-02
LISN	R&S	ENV216	101837	2022-08-05
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	2023-10-06
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

7. 20dB BANDWIDTH

LIMITS

§15.215

(c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated

§15.225

Operation within the band 13.110 – 14.010MHz


TEST PROCEDURE

The spectrum analyzer connected receive antenna and the EUT placed on near the receive antenna. The RBW is set to 10kHz. The VBW is set to 3 times the RBW. The sweep time is coupled.

RESULTS

Frequency [MHz]	20 dB Bandwidth [kHz]
13.56	437.30

20dB Bandwidth Plot

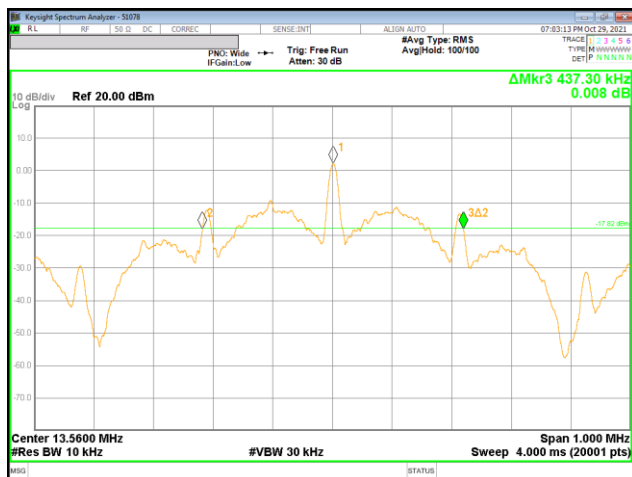

8. RADIATED EMISSION TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMIT

§15.225

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/ meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110– 14.010 MHz and shall not exceed the general radiated emission limits in § 15.209 as follows:

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

Formula for converting the filed strength from uV/m to dBuV/m is:

Limit (dBuV/m) = 20 log limit (uV/m)

In addition:

§15.209 (d) The emission limits shown the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

§15.209 (d) The provisions in §§ 15.225, measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

TEST PROCEDURE

ANSI C63.10-2013


The EUT is an intentional radiator that incorporates a digital device. The highest fundamental frequency generated or used in the device is 13.56 MHz. The frequency range was investigated from 0.15 MHz to the 10th harmonic of the highest fundamental frequency, or 1000 MHz, whichever is greater (1000MHz)

RESULTS

No non-compliance noted:

8.1.1. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz)

[EUT without passive TAG mode]

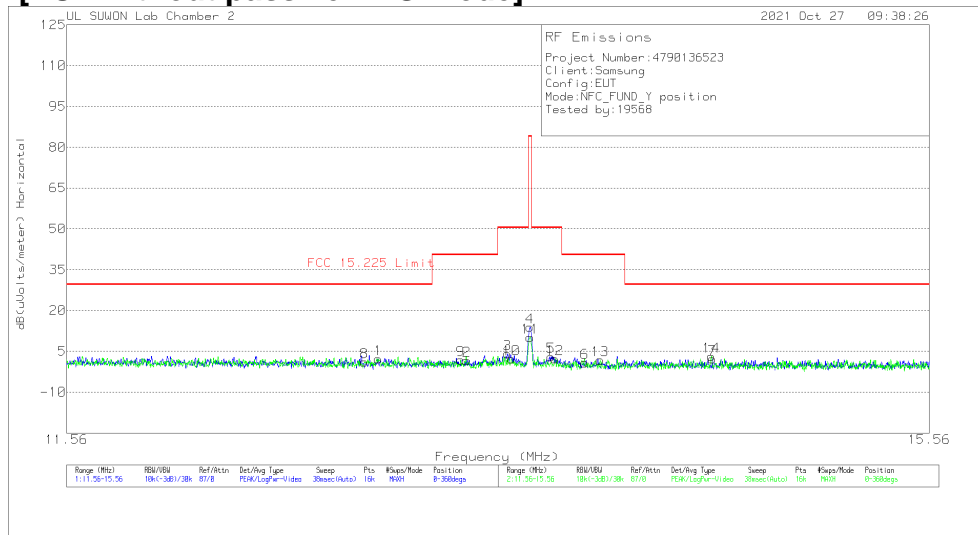

Trace Markers

[Face On]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Dist Corr 30m	Cable Loss	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
1	12.86938	21.66	PK	20	-40	.5	2.16	29.54	-27.38	0-360
2	13.26975	21.14	PK	20	-40	.5	1.64	40.51	-38.87	0-360
3	13.45588	23.57	PK	20	-40	.5	4.07	50.5	-46.43	0-360
**4	13.56138	33.35	PK	20	-40	.5	13.85	84	-70.15	0-360
5	13.65963	22.47	PK	20	-40	.6	3.07	50.5	-47.43	0-360
6	13.81913	20.22	PK	20	-40	.6	.82	40.51	-39.69	0-360
7	14.43988	21.58	PK	20	-40	.6	2.18	29.54	-27.36	0-360

[Face Off]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Dist Corr 30m	Cable Loss	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
8	12.80963	20.67	PK	20	-40	.5	1.17	29.54	-28.37	0-360
9	13.24025	21.32	PK	20	-40	.5	1.82	40.51	-38.69	0-360
10	13.47413	21.64	PK	20	-40	.5	2.14	50.5	-48.36	0-360
**11	13.5615	30.66	PK	20	-40	.5	11.16	84	-72.84	0-360
12	13.67888	21.68	PK	20	-40	.6	2.28	50.5	-48.22	0-360
13	13.89238	21.16	PK	20	-40	.6	1.76	40.51	-38.75	0-360
14	14.435	22.55	PK	20	-40	.6	3.15	29.54	-26.39	0-360

Pk - Peak detector


**Fundamental

Note 1 : Although these tests were performed other than open filed test site, adequate comparison measurements were confirmed against 30 m open are test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Note 2: Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.

8.1.2. SPURIOUS EMISSION 0.009 TO 30 MHz [EUT without passive TAG mode]

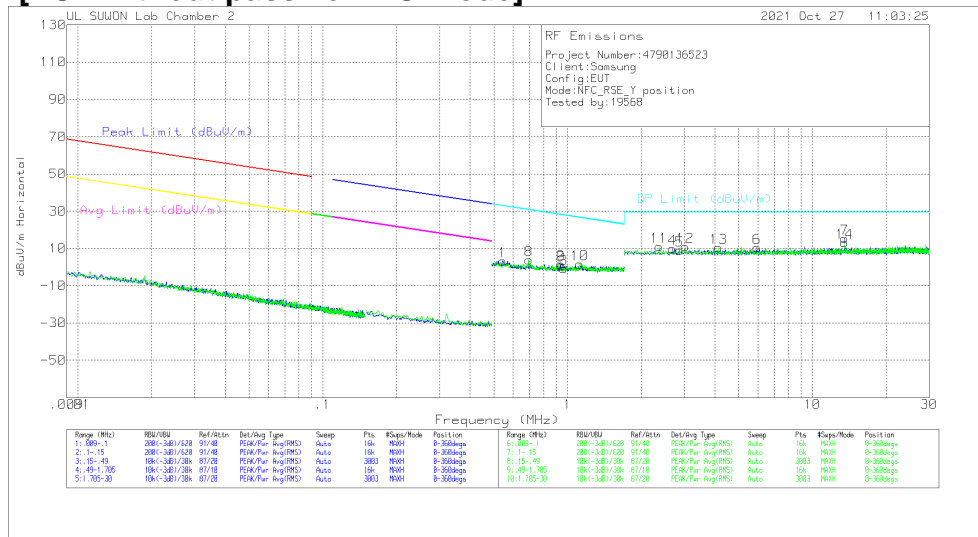

Trace Markers

Face on

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Cable Loss	Dist Corr 30m	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
1	.54385	23.5	Pk	19.7	.1	-40	3.3	32.9	-29.6	0-360
2	.93715	21.67	Pk	19.8	.2	-40	1.67	28.18	-26.51	0-360
3	.96314	19.23	Pk	19.8	.2	-40	-7.77	27.95	-28.72	0-360
4	2.6852	29.62	Pk	19.9	.3	-40	9.82	29.5	-19.68	0-360
5	2.86428	28.95	Pk	19.9	.3	-40	9.15	29.5	-20.35	0-360
6	5.9274	30.22	Pk	19.8	.4	-40	10.42	29.5	-19.08	0-360
**7	13.56165	34.86	Pk	20	.5	-40	15.36	29.5	-14.14	0-360

Face off

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Cable Loss	Dist Corr 30m	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
8	.6941	24.09	Pk	19.7	.1	-40	3.89	30.78	-26.89	0-360
9	.94239	21.17	Pk	19.8	.2	-40	1.17	28.14	-26.97	0-360
10	1.12217	21.67	Pk	19.8	.2	-40	1.67	26.62	-24.95	0-360
11	2.36475	30.97	Pk	19.9	.2	-40	11.07	29.5	-18.43	0-360
12	3.0245	30.81	Pk	19.9	.3	-40	11.01	29.5	-18.49	0-360
13	4.14608	30.25	Pk	19.8	.3	-40	10.35	29.5	-19.15	0-360
**14	13.56165	32.68	Pk	20	.5	-40	13.18	29.5	-16.32	0-360

Pk - Peak detector

**Fundamental

Note 1: The data for marker number 7 and 14 are the fundamental signal.


Please refer to section 8.1.1 about the fundamental level.

Frequency range 0.009MHz ~ 0.490MHz, only noise floor level and more than 20dB margin.


Note 2: Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.

8.1.3. TX SPURIOUS EMISSION 30 TO 1000 MHz [EUT without passive TAG mode]

HORIZONTAL

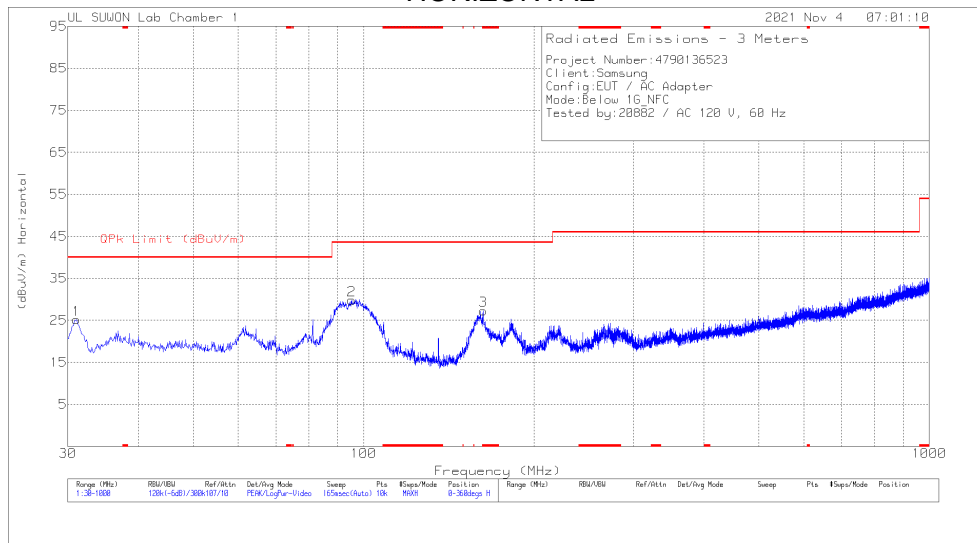

VERTICAL

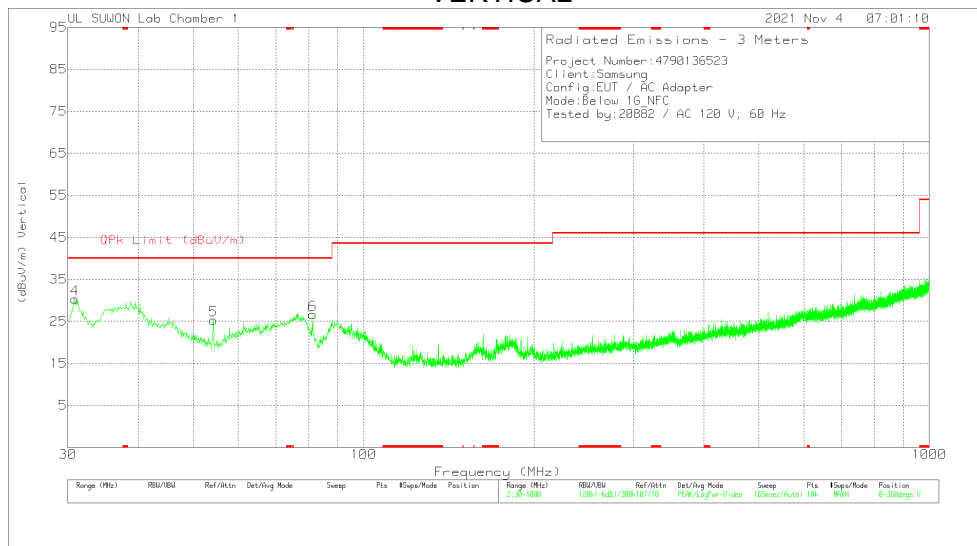


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163_750	Below_1G[dB]	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	31.067	40.96	Pk	15.7	-31.5	25.16	40	-14.84	0-360	200	H
2	95.281	43.42	Pk	16.7	-30.3	29.82	43.52	-13.7	0-360	200	H
3	* 162.696	42.71	Pk	14.4	-29.8	27.31	43.52	-16.21	0-360	100	H
4	30.873	45.91	Pk	15.7	-31.3	30.31	40	-9.69	0-360	200	V
5	54.25	36.49	Pk	19.5	-30.7	25.29	40	-14.71	0-360	200	V
6	81.313	44.34	Pk	12.9	-30.6	26.64	40	-13.36	0-360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector

8.1.4. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz) [EUT with passive TAG mode]

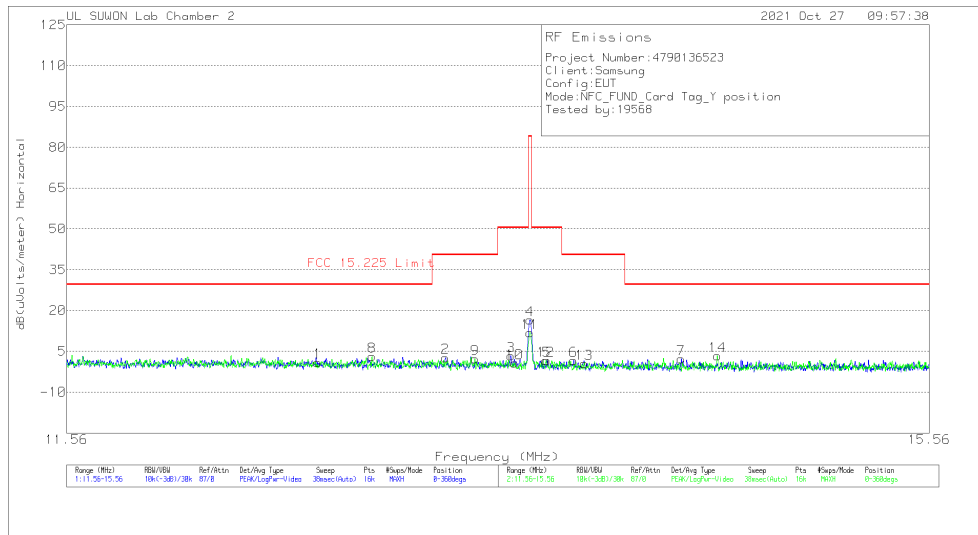

Trace Markers

[Face On]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Dist Corr 30m	Cable Loss	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
1	12.60363	20.5	PK	20	-40	.5	1	29.54	-28.54	0-360
2	13.17188	22.2	PK	20	-40	.5	2.7	40.51	-37.81	0-360
3	13.47138	22.83	PK	20	-40	.5	3.33	50.5	-47.17	0-360
**4	13.56	36.03	PK	20	-40	.5	16.53	84	-67.47	0-360
5	13.64013	21.04	PK	20	-40	.6	1.64	50.5	-48.86	0-360
6	13.76638	21.09	PK	20	-40	.6	1.69	40.51	-38.82	0-360
7	14.28638	21.64	PK	20	-40	.6	2.24	29.54	-27.3	0-360

[Face Off]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Dist Corr 30m	Cable Loss	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
8	12.84238	22.65	PK	20	-40	.5	3.15	29.54	-26.39	0-360
9	13.30563	21.75	PK	20	-40	.5	2.25	40.51	-38.26	0-360
10	13.489	20.25	PK	20	-40	.5	.75	50.5	-49.75	0-360
**11	13.56	31.38	PK	20	-40	.5	11.88	84	-72.12	0-360
12	13.63563	21.05	PK	20	-40	.6	1.65	50.5	-48.85	0-360
13	13.81675	19.87	PK	20	-40	.6	.47	40.51	-40.04	0-360
14	14.46463	22.79	PK	20	-40	.6	3.39	29.54	-26.15	0-360

Pk - Peak detector


**Fundamental

Note 1: Although these tests were performed other than open filed test site, adequate comparison measurements were confirmed against 30 m open are test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Note 2: Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.

8.1.5. SPURIOUS EMISSION 0.09 TO 30 MHz [EUT with passive TAG mode]

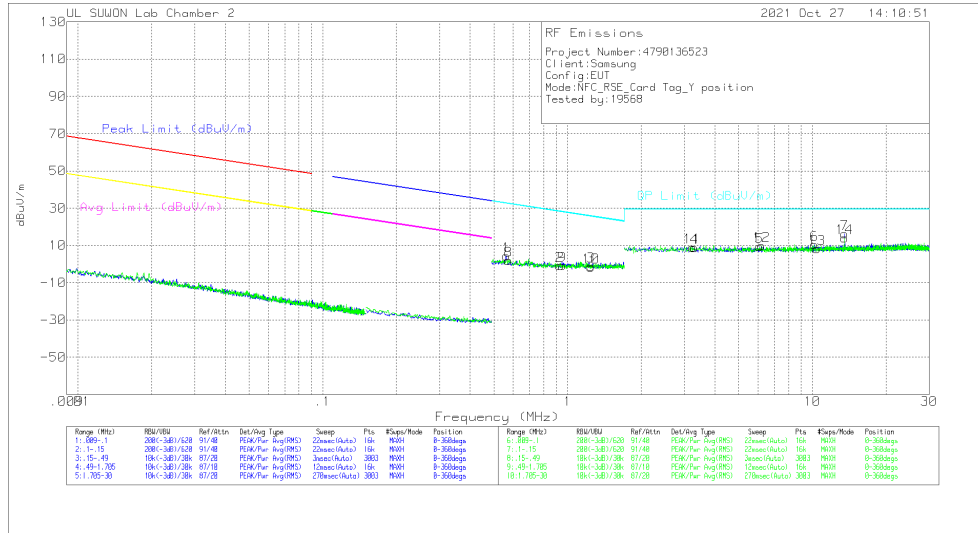

Trace Markers

Face on

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Cable Loss	Dist Corr 30m	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
1	.56155	24.53	Pk	19.7	.1	-40	4.33	32.62	-28.29	0-360
2	.93069	19.22	Pk	19.8	.2	-40	-7.8	28.24	-29.02	0-360
3	1.24859	18.92	Pk	19.8	.2	-40	-1.08	25.7	-26.78	0-360
4	3.29783	28.67	Pk	19.9	.3	-40	8.87	29.5	-20.63	0-360
5	6.0782	29.08	Pk	19.8	.4	-40	9.28	29.5	-20.22	0-360
6	10.20635	29.87	Pk	20	.5	-40	10.37	29.5	-19.13	0-360
**7	13.56165	35.87	Pk	20	.5	-40	16.37	29.5	-13.13	0-360

Face off

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Cable Loss	Dist Corr 30m	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
8	.57265	22.03	Pk	19.7	.1	-40	1.83	32.45	-30.62	0-360
9	.95003	19.3	Pk	19.8	.2	-40	-7	28.07	-28.77	0-360
10	1.24704	18.33	Pk	19.8	.2	-40	-1.67	25.71	-27.38	0-360
11	3.23185	28.77	Pk	19.9	.3	-40	8.97	29.5	-20.53	0-360
12	6.1913	29.64	Pk	19.8	.4	-40	9.84	29.5	-19.66	0-360
13	10.44198	27.66	Pk	20	.5	-40	8.16	29.5	-21.34	0-360
**14	13.56165	33.49	Pk	20	.5	-40	13.99	29.5	-15.51	0-360

Pk - Peak detector

**Fundamental

Note 1: The data for marker number 7 and 14 are the fundamental signal.


Please refer to section 8.1.4 about the fundamental level.

Frequency range 0.009MHz ~ 0.490MHz, only noise floor level and more than 20dB margin.


Note 2: Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.

8.1.6. TX SPURIOUS EMISSION 30 TO 1000 MHz [EUT with passive TAG mode]

HORIZONTAL

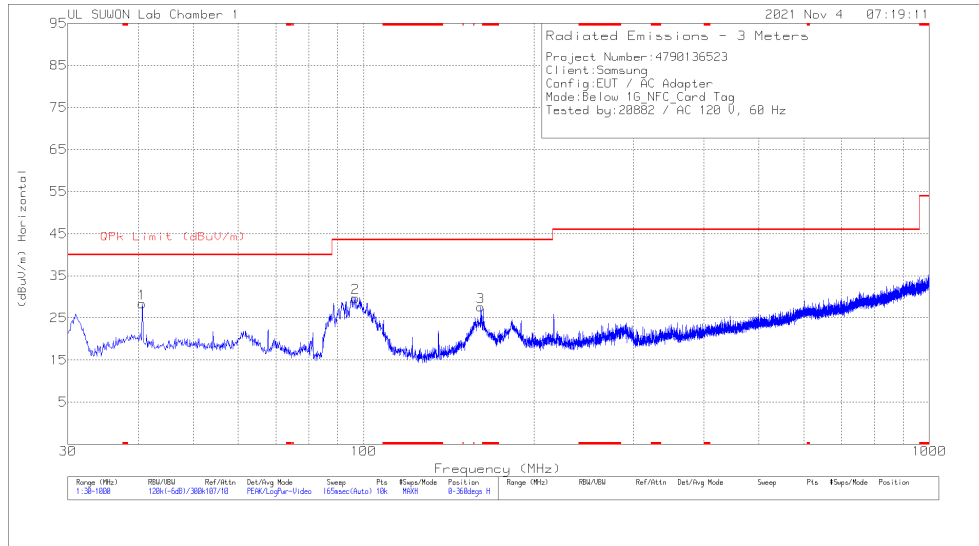

VERTICAL

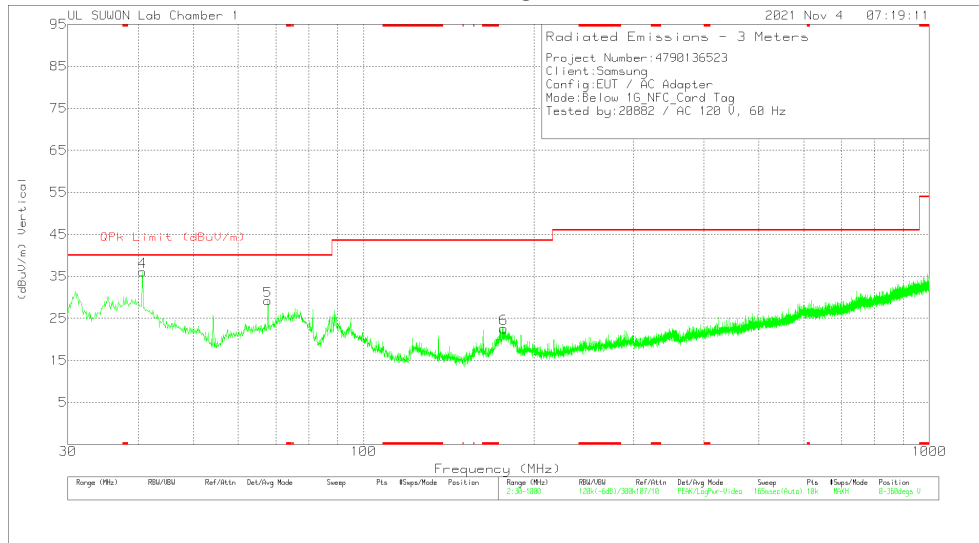

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163_750	Below_1G[dB]	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	40.573	40.72	Pk	18.8	-31.1	28.42	40	-11.58	0-360	200	H
2	96.833	43.05	Pk	17	-30.3	29.75	43.52	-13.77	0-360	200	H
3	161.144	43.02	Pk	14.3	-29.7	27.62	43.52	-15.9	0-360	100	H
4	40.67	48.26	Pk	18.8	-31	36.06	40	-3.94	0-360	200	V
5	67.733	43.7	Pk	16.3	-30.8	29.2	40	-10.8	0-360	200	V
6	176.858	36.97	Pk	15.1	-29.5	22.57	43.52	-20.95	0-360	200	V

Pk - Peak detector

9. AC MAINS LINE CONDUCTED EMISSIONS

LIMITS

§15.207

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50μH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Notes:
 1. The lower limit shall apply at the transition frequencies
 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.


Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

No non-compliance noted:

WORST EMISSIONS

LINE 1 PLOT

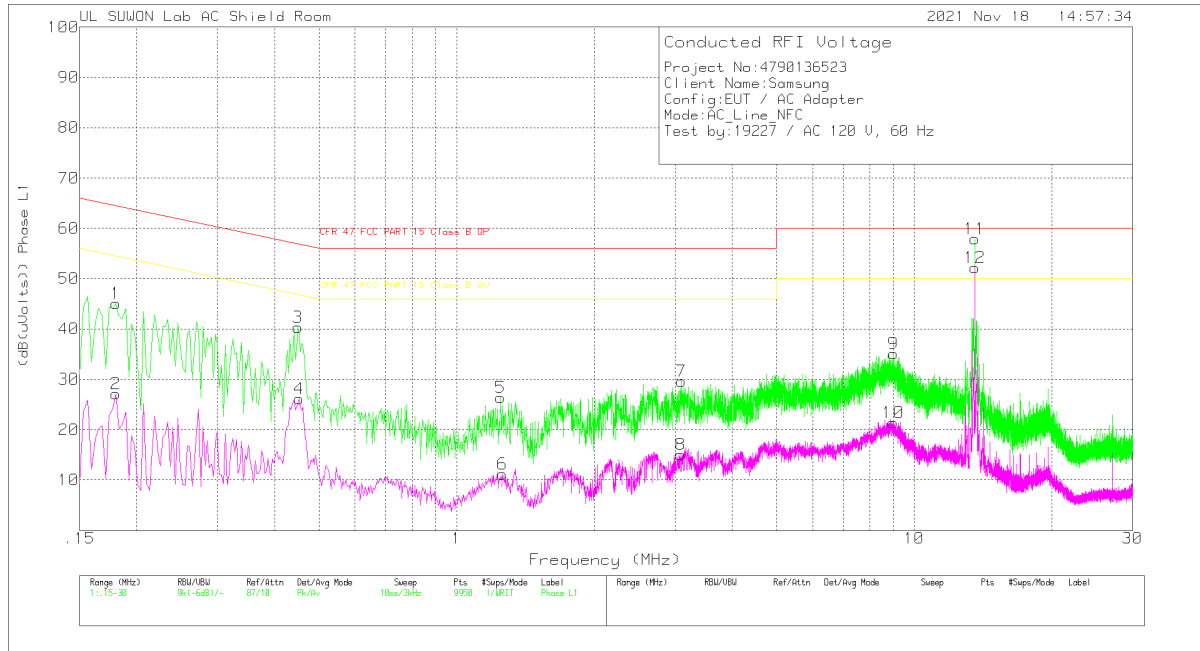

LINE 1 RESULTS

Range 1: Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_Wit h EX_L1[dB]	CABLELOSS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
1	.18	34.99	Pk	9.9	.2	45.09	64.49	-19.4	-	-
2	.18	16.97	Av	9.9	.2	27.07	-	-	54.49	-27.42
3	.45	30.18	Pk	9.9	.2	40.28	56.88	-16.6	-	-
4	.453	16.08	Av	9.9	.2	26.18	-	-	46.82	-20.64
5	1.248	16.42	Pk	9.7	.3	26.42	56	-29.58	-	-
6	1.26	1.17	Av	9.7	.3	11.17	-	-	46	-34.83
7	3.102	19.62	Pk	9.7	.3	29.62	56	-26.38	-	-
8	3.09	5.02	Av	9.7	.3	15.02	-	-	46	-30.98
9	9	24.92	Pk	9.8	.4	35.12	60	-24.88	-	-
10	8.997	11.21	Av	9.8	.4	21.41	-	-	50	-28.59
11	13.56	47.47	Pk	10	.4	57.87	60	-2.13	-	-
12	13.56	41.74	Av	10	.4	52.14	-	-	50	2.14

Pk - Peak detector

Av - Average detection


Quasi-Peak Emissions

Range 1: Phase L1 .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101836_With EX_L1[dB]	CABLELOSS (dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
13.5608	45.98	Qp	10	.4	56.38	60	-3.62	-	-

Qp - Quasi-Peak detector

LINE 2 PLOT

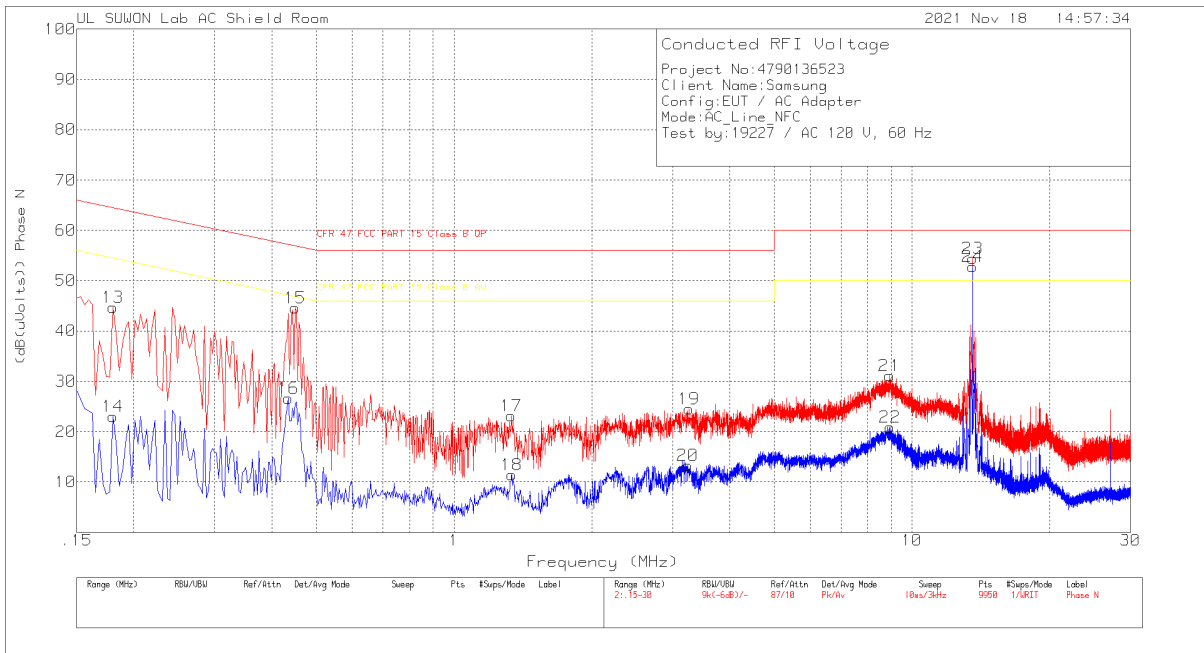

LINE 2 RESULTS

Trace Markers

Range 2: Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_With EX_N[dB]	CABLELOSS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
13	.18	34.63	Pk	9.9	.2	44.73	64.49	-19.76	-	-
14	.18	12.9	Av	9.9	.2	23	-	-	54.49	-31.49
15	.45	34.53	Pk	9.9	.2	44.63	56.88	-12.25	-	-
16	.435	16.48	Av	9.9	.2	26.58	-	-	47.16	-20.58
17	1.335	13.15	Pk	9.7	.3	23.15	56	-32.85	-	-
18	1.338	1.46	Av	9.7	.3	11.46	-	-	46	-34.54
19	3.258	14.51	Pk	9.7	.3	24.51	56	-31.49	-	-
20	3.243	3.24	Av	9.7	.3	13.24	-	-	46	-32.76
21	8.94	20.9	Pk	9.8	.4	31.1	60	-28.9	-	-
22	8.952	10.68	Av	9.8	.4	20.88	-	-	50	-29.12
23	13.56	44.03	Pk	10	.4	54.43	60	-5.57	-	-
24	13.56	42.37	Av	10	.4	52.77	-	-	50	2.77

Pk - Peak detector

Av - Average detection

Quasi-Peak Emissions


Range 2: Phase N .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101836_With EX_N[dB]	CABLELOSS (dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
13.5608	43.23	Qp	10	.4	53.63	60	-6.37	-	-

Qp - Quasi-Peak detector

WORST EMISSIONS(Terminated)

LINE 1 PLOT

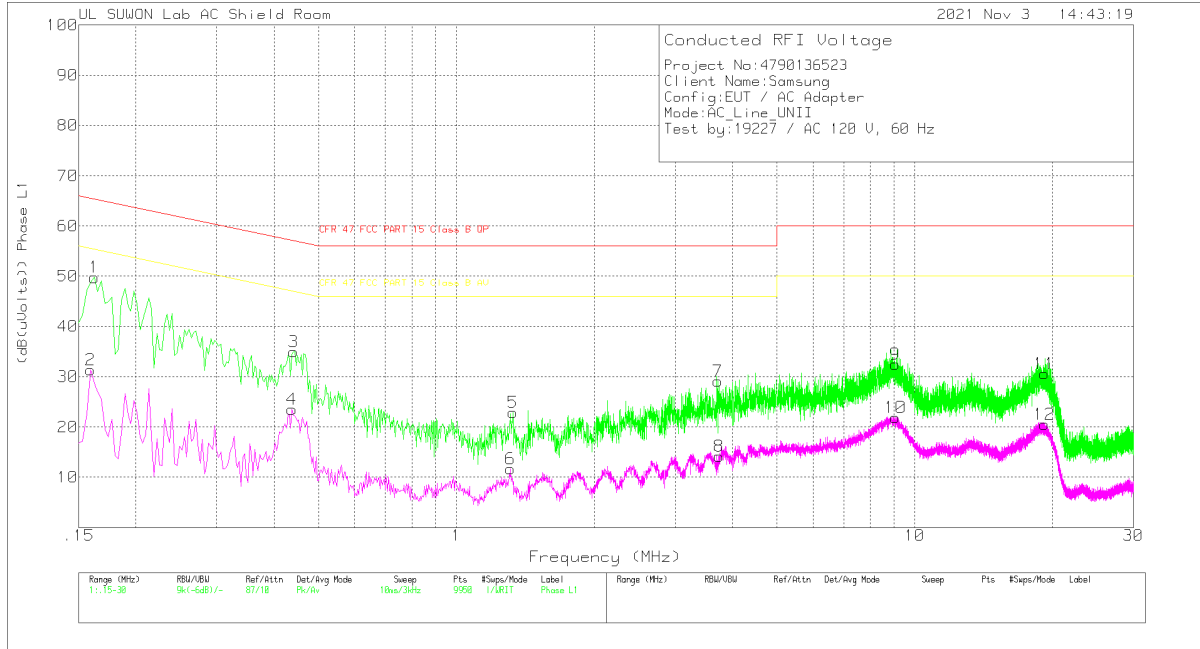


LINE 1 RESULTS

Range 1: Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_Wit h EX_L1[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
1	.162	39.75	Pk	9.9	.1	49.75	65.36	-15.61	-	-
2	.159	21.42	Av	9.8	.1	31.32	-	-	55.52	-24.2
3	.441	25.01	Pk	9.8	.2	35.01	57.04	-22.03	-	-
4	.438	13.47	Av	9.8	.2	23.47	-	-	47.1	-23.63
5	1.329	12.88	Pk	9.7	.3	22.88	56	-33.12	-	-
6	1.314	1.72	Av	9.7	.3	11.72	-	-	46	-34.28
7	3.723	19.17	Pk	9.7	.3	29.17	56	-26.83	-	-
8	3.744	4.22	Av	9.7	.3	14.22	-	-	46	-31.78
9	9.06	22.33	Pk	9.8	.4	32.53	60	-27.47	-	-
10	9.081	11.71	Av	9.8	.4	21.91	-	-	50	-28.09
11	19.188	20.14	Pk	10.1	.4	30.64	60	-29.36	-	-
12	19.191	10.01	Av	10.1	.4	20.51	-	-	50	-29.49

Pk - Peak detector
 Av - Average detection

LINE 2 PLOT

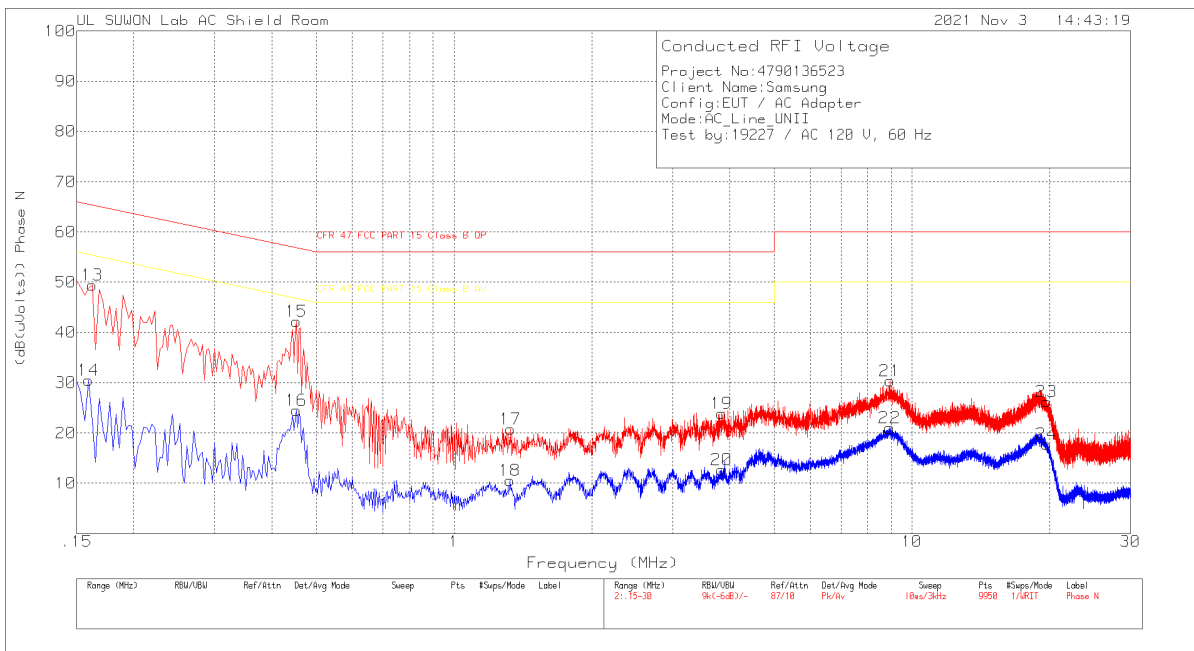

LINE 2 RESULTS

Trace Markers

Range 2: Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_Wit h EX_N[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
13	.162	39.39	Pk	9.9	.1	49.39	65.36	-15.97	-	-
14	.159	20.61	Av	9.8	.1	30.51	-	-	55.52	-25.01
15	.453	32.08	Pk	9.9	.2	42.18	56.82	-14.64	-	-
16	.453	14.42	Av	9.9	.2	24.52	-	-	46.82	-22.3
17	1.329	10.77	Pk	9.7	.3	20.77	56	-35.23	-	-
18	1.326	.54	Av	9.7	.3	10.54	-	-	46	-35.46
19	3.843	13.94	Pk	9.7	.3	23.94	56	-32.06	-	-
20	3.843	2.7	Av	9.7	.3	12.7	-	-	46	-33.3
21	8.943	20.19	Pk	9.8	.4	30.39	60	-29.61	-	-
22	8.94	10.76	Av	9.8	.4	20.96	-	-	50	-29.04
23	19.686	15.71	Pk	10.2	.4	26.31	60	-33.69	-	-
24	19.662	7.22	Av	10.2	.4	17.82	-	-	50	-32.18

Pk - Peak detector
 Av - Average detection

10. FREQUENCY STABILITY

LIMIT

§15.225 (e) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency, over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

TEST PROCEDURE

ANSI C63.10 §6.8

RESULTS

Reference Frequency: EUT Channel 13.56 MHz @ 20°C Limit: ± 100 ppm = 1.356 kHz										
Power Supply (Vdc)	Envir. Temp (°C)	Frequency Deviation Measured with Time Elapse								
		Start up (MHz)	Delta (ppm)	@ 2mins (MHz)	Delta (ppm)	@ 5mins (MHz)	Delta (ppm)	@ 10 mins (MHz)	Delta (ppm)	Limit (ppm)
3.88	50	13.560622661	-0.008	13.560622661	-0.008	13.560622271	0.021	13.560622030	0.039	100
3.88	40	13.560622713	-0.011	13.560622750	-0.014	13.560622773	-0.016	13.560622793	-0.017	100
3.88	30	13.560622474	0.006	13.560622475	0.006	13.560622527	0.002	13.560622612	-0.004	100
3.88	20	13.560622558	0	13.560622549	0.001	13.560622543	0.001	13.560622538	0.001	100
3.88	10	13.560622197	0.027	13.560622142	0.031	13.560622483	0.006	13.560622527	0.002	100
3.88	0	13.560622501	0.004	13.560622690	-0.010	13.560623013	-0.034	13.560623283	-0.053	100
3.88	-10	13.560623903	-0.099	13.560624051	-0.110	13.560624051	-0.110	13.560623902	-0.099	100
3.88	-20	13.560622891	-0.025	13.560622197	0.027	13.560621394	0.086	13.560621109	0.107	100
3.88	-30	13.560620119	0.180	13.560619336	0.238	13.560618298	0.314	13.560617471	0.375	100

Reference Frequency: EUT Channel 13.56 MHz @ 20°C Limit: ± 100 ppm = 1.356 kHz										
Power Supply (Vdc)	Envir. Temp (°C)	Frequency Deviation Measured with Time Elapse								
		Start up (MHz)	Delta (ppm)	@ 2mins (MHz)	Delta (ppm)	@ 5mins (MHz)	Delta (ppm)	@ 10 mins (MHz)	Delta (ppm)	Limit (ppm)
3.88	20	13.560622558	0	13.560622549	0.001	13.560622543	0.001	13.560622538	0.001	100
4.47	20	13.560622555	0.000	13.560622550	0.001	13.560622547	0.001	13.560622539	0.001	100
3.60	20	13.560622551	0.001	13.560622548	0.001	13.560622540	0.001	13.560622537	0.002	100

No non-compliance noted.

END OF TEST REPORT