



# **CERTIFICATION TEST REPORT**

**Report Number.** : 4790136523-E6V2

**Applicant** : SAMSUNG ELECTRONICS CO., LTD.  
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,  
GYEONGGI-DO, 16677, KOREA

**Model** : SM-N986B1/DS, SM-N986B1

**FCC ID** : A3LSMN986B1

**EUT Description** : GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, NFC,  
WPT and UWB

**Test Standard(s)** : FCC 47 CFR PART 15 SUBPART C

**Date Of Issue:**

2021-11-15

**Prepared by:**

UL Korea, Ltd.

26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory

218 Maeyeong-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16675, Korea

TEL: (031) 337-9902

FAX: (031) 213-5433



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	2021-11-05	Initial issue	Hyunsik Yun
V2	2021-11-15	Updated to address TCB's question	Hyunsik Yun

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>5</b>
<b>2. TEST METHODOLOGY .....</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>6</b>
<b>4. DECISION RULES AND MEASUREMENT UNCERTAINTY .....</b>	<b>7</b>
4.1. METROLOGICAL TRACEABILITY.....	7
4.2. SAMPLE CALCULATION.....	7
4.3. MEASUREMENT UNCERTAINTY .....	7
4.4. DECISION RULES.....	7
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>8</b>
5.1. EUT DESCRIPTION.....	8
5.2. MAXIMUM OUTPUT POWER.....	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS .....	8
5.4. WORST-CASE CONFIGURATION AND MODE .....	9
5.5. DESCRIPTION OF TEST SETUP .....	9
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>11</b>
<b>7. TEST RESULTS SUMMARY .....</b>	<b>12</b>
<b>8. MEASUREMENT METHODS .....</b>	<b>13</b>
<b>9. ANTENNA PORT TEST RESULTS .....</b>	<b>14</b>
9.1. ON TIME AND DUTY CYCLE .....	14
9.2. 20 dB BANDWIDTH .....	15
9.2.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION .....	15
9.2.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....	15
9.3. HOPPING FREQUENCY SEPARATION.....	17
9.3.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION .....	18
9.3.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....	18
9.4. NUMBER OF HOPPING CHANNELS .....	19
9.4.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION .....	20
9.4.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....	21
9.5. AVERAGE TIME OF OCCUPANCY.....	22
9.5.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION .....	23
9.5.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....	25
9.6. OUTPUT POWER.....	27
9.6.1. BASIC DATA RATE GFSK MODULATION.....	27
9.6.2. ENHANCED DATA RATE Pi/4-DPSK MODULATION .....	27
9.6.3. ENHANCED DATA RATE 8PSK MODULATION .....	27

---

9.6.4. OUTPUT POWER PLOTS.....	28
9.7. AVERAGE POWER.....	30
9.7.1. BASIC DATA RATE GFSK MODULATION.....	30
9.7.2. ENHANCED DATA RATE PI/4-DQPSK MODULATION.....	30
9.7.3. ENHANCED DATA RATE 8PSK MODULATION.....	30
9.8. CONDUCTED SPURIOUS EMISSIONS.....	31
9.8.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION.....	32
9.8.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....	34
<b>10. RADIATED TEST RESULTS.....</b>	<b>36</b>
10.1. TRANSMITTER ABOVE 1 GHz.....	38
10.1.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION.....	38
10.1.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....	45
10.2. WORST CASE BELOW 1 GHZ.....	52
<b>11. AC POWER LINE CONDUCTED EMISSIONS.....</b>	<b>53</b>
11.1.1. AC Power Line.....	54

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SAMSUNG ELECTRONICS CO., LTD.  
**EUT DESCRIPTION:** GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, NFC, WPT and UWB  
**MODEL:** SM-N986B1/DS, SM-N986B1  
**SERIAL NUMBER:** R3CR90Y67CY (CONDUCTED);  
R3CR90Y67BD (RADIATED);  
**DATE TESTED:** 2021-10-14 ~ 2021-11-05

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Korea, Ltd. By:



Junwhan Lee  
Suwon Lab Engineer  
UL Korea, Ltd.

Tested By:



Dexter(Hyunsik) Yun  
Suwon Lab Engineer  
UL Korea, Ltd.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. KDB 558074 D01 15.247 Meas Guidance v05r02.
4. ANSI C63.10-2013.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1
<input checked="" type="checkbox"/>	Chamber 2
<input checked="" type="checkbox"/>	Chamber 3

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

## 4. DECISION RULES AND MEASUREMENT UNCERTAINTY

### 4.1. METROLOGICAL TRACEABILITY

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.02 dB
Radiated Disturbance, 30 MHz to 1 GHz	4.05 dB
Radiated Disturbance, 1 GHz to 18 GHz	5.78 dB
Radiated Disturbance, 18 GHz to 40 GHz	5.58 dB

Uncertainty figures are valid to a confidence level of 95%.

### 4.4. DECISION RULES

Decision rule for statement(s) of conformity is based on Procedure 2, Clause 4.4.3 in IEC Guide 115:2007.

## 5. EQUIPMENT UNDER TEST

### 5.1. EUT DESCRIPTION

The EUT is a GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, NFC, WPT and UWB. This test report addresses the BT(DSS) operational mode.

This report covers the Samsung models SM-N986B1/DS, SM-N986B1.

These models are identical in hardware except SM-N986B1/DS is supported dual SIM tray and SM-N986B1 has single SIM tray.

All series model was same hardware thus, SM-N986B1/DS(Dual SIM tray) was set for final test.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range [MHz]	Mode	Power Mode	Output Power [dBm]	Output Power [mW]
2 402 ~ 2 480	Basic GFSK	Average	17.696	58.830
		Peak	18.145	65.238
	Enhanced Pi/4-DPSK	Average	11.286	13.446
		Peak	13.975	24.975
	Enhanced 8PSK	Average	11.286	13.446
		Peak	14.424	27.695

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The internal antenna was Permanently attached.  
 Therefore this E.U.T Complies with the requirement of §15.203.**

The radio utilizes an internal antennas, with ANT 1's maximum gain of -5.12 dBi.



## 5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

Fundamental of the EUT was investigated in three orthogonal orientations X,Y and Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance.

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA800	R37R38J4A28SE3	N/A
Data Cable	SAMSUNG	EP-DG980	N/A	N/A


### I/O CABLE

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0 m	N/A


### TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests. Test software enable BT communications.

**SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)**

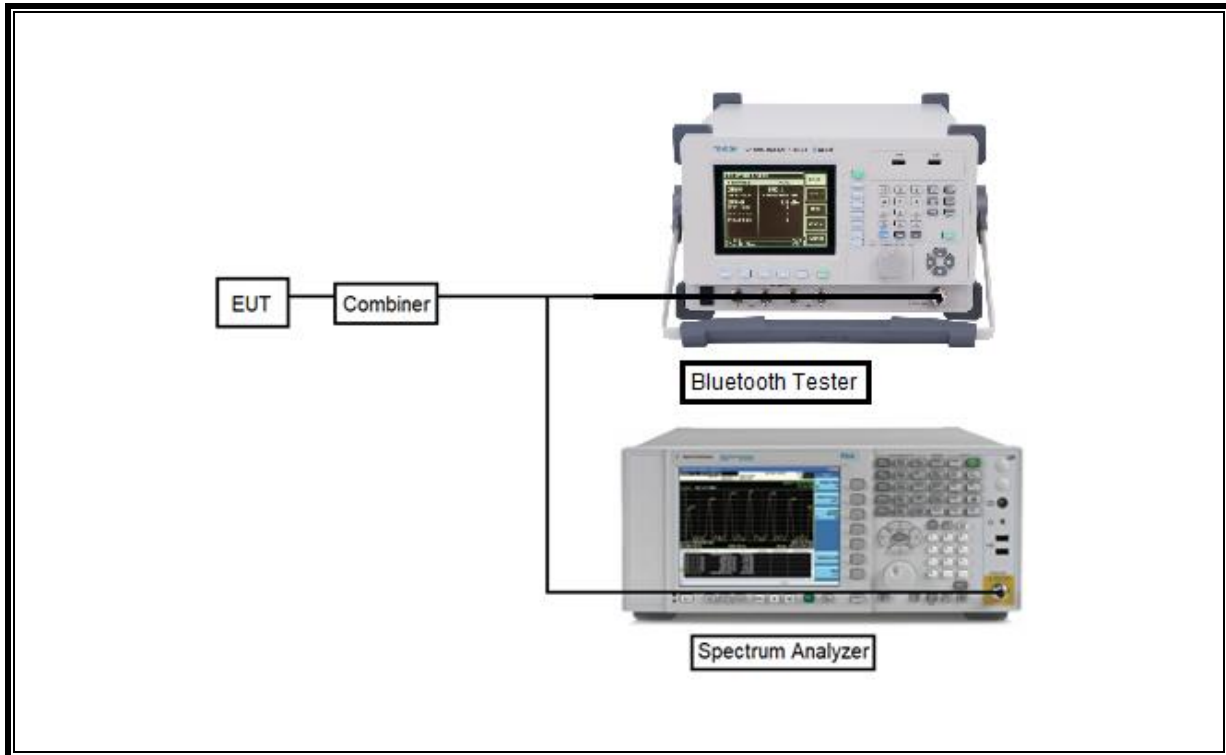

**SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)**

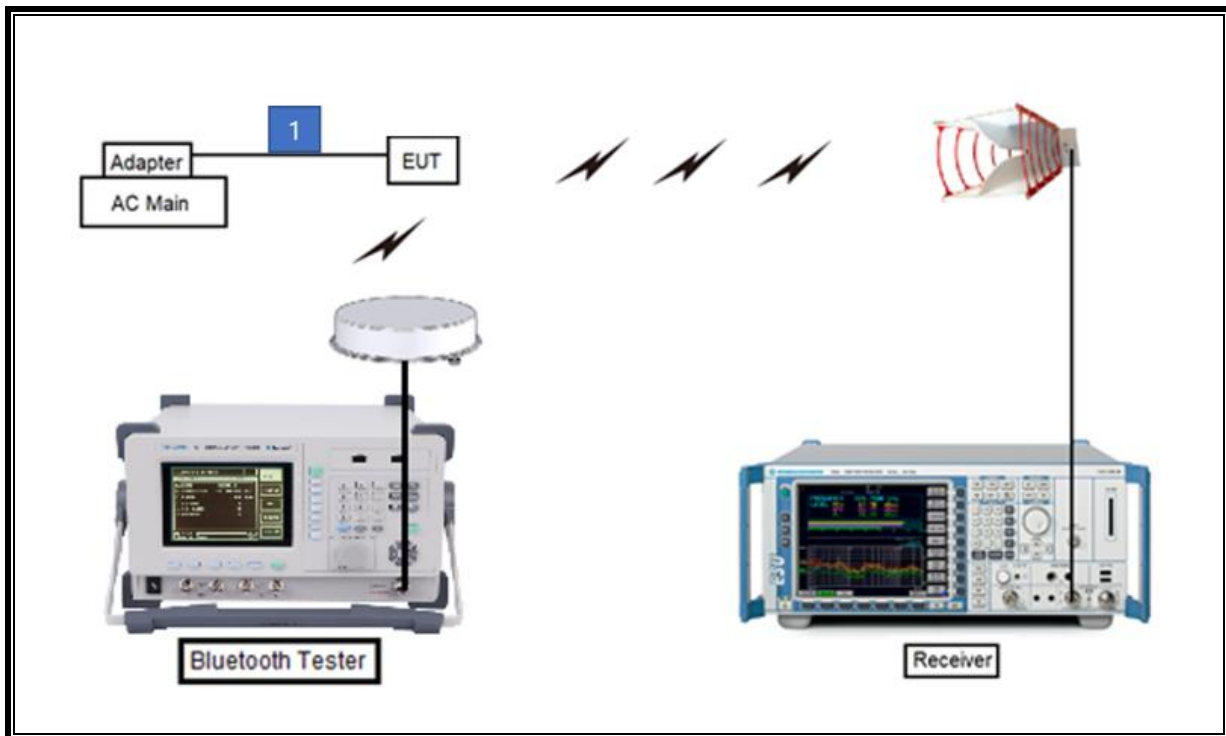

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	2022-08-19
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	2022-08-13
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	2022-08-13
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	2023-10-06
Antenna, Horn, 18 GHz	ETS	3115	00167211	2022-07-27
Antenna, Horn, 18 GHz	ETS	3115	00161451	2022-08-15
Antenna, Horn, 18 GHz	ETS	3117	00168724	2022-07-27
Antenna, Horn, 18 GHz	ETS	3117	00168717	2022-08-15
Antenna, Horn, 40 GHz	ETS	3116C	00166155	2022-08-04
Preamplifier	ETS	3116C-PA	00168841	2022-08-04
Directional Antenna	Cobham	FPA3-0.8-6.0R/1329	80108-0004	N/A
Directional Antenna	Cobham	FPA3-0.8-6.0R/1329	110367-0003	N/A
Preamplifier, 1000 MHz	Sonoma	310N	341282	2022-08-02
Preamplifier, 1000 MHz	Sonoma	310N	351741	2022-08-02
Preamplifier, 1000 MHz	Sonoma	310N	370599	2022-08-02
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	2022-08-02
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	2022-08-02
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029168	2022-08-02
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	2022-08-04
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	2022-08-04
Average Power Sensor	Agilent / HP	U2000	MY54270007	2022-08-04
Average Power Sensor	Agilent / HP	U2000	MY54260010	2022-08-04
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	2022-08-04
Power Splitter	MINI-CIRCUITS	WA1534	UL001	2022-01-27
Power Splitter	MINI-CIRCUITS	WA1534	UL002	2022-01-27
Attenuator	PASTERNAK	PE7087-10	A009	2022-08-03
Attenuator	PASTERNAK	PE7087-10	A001	2022-08-03
Attenuator	PASTERNAK	PE7087-10	A008	2022-08-03
Attenuator	PASTERNAK	PE7004-10	2	2022-08-02
EMI Test Receive, 40 GHz	R&S	ESU40	100439	2022-08-02
EMI Test Receive, 40 GHz	R&S	ESU40	100457	2022-08-02
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	2022-08-02
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	2022-08-02
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	019	2022-08-02
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	2022-08-02
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	2022-08-02
High Pass Filter 3GHz	Micro-Tronics	HPM17543	020	2022-08-02
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	2022-08-02
High Pass Filter 6GHz	Micro-Tronics	HPS17542	016	2022-08-02
High Pass Filter 6GHz	Micro-Tronics	HPS17542	020	2022-08-02
LISN	R&S	ENV-216	101837	2022-08-05
Termination	WEINSCHEL	M1406A	T09	2022-08-03
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

## 7. TEST RESULTS SUMMARY

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
2.1051, 15.247(d)	Band Edge / Conducted Spurious Emission	-20 dBc	Conducted	PASS
15.247 (b)(1)	TX conducted output power	< 21 dBm		PASS
15.247 (a)(1)	Hopping frequency separation	> two-thirds of the 20 dB bandwidth		PASS
15.247 (a)(1)(iii)	Number of Hopping channels	More than 15 non-overlapping channels		PASS
15.247 (a)(1)(iii)	Avg Time of Occupancy	< 8 dBm		PASS
15.207(a)	AC Power Line conducted emissions	Section 11	Power Line conducted	PASS
15.205, 15.209	Radiated Spurious Emission	< 54dBuV/m(Av)	Radiated	PASS

---

## 8. MEASUREMENT METHODS

20dB BW : ANSI C63.10, Section 6.9.2

99% BW : ANSI C63.10, Section 6.9.3

HOPPING FREQUENCY SEPARATION : ANSI C63.10, Section 7.8.2

NUMBER OF HOPPING CHANNELS : ANSI C63.10, Section 7.8.3

AVERAGE TIME OF OCCUPANCY : ANSI C63.10, Section 7.8.4

OUTPUT POWER : ANSI C63.10, Section 7.8.5.

Out-of-band EMISSIONS (Conducted) : ANSI C63.10, Section 7.8.6, 7.8.8

Out-of-band EMISSIONS IN NON-RESTRICTED BANDS: ANSI C63.10, Section 6.

Out-of-band EMISSIONS IN RESTRICTED BANDS : ANSI C63.10, Section 6.

AC Power Line Conducted Emission : ANSI C63.10-2013, Section 6.2.



## 9.2. 20 dB BANDWIDTH

### LIMITS

None; for reporting purposes only.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq 1\%$  of the 20 dB bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.


### RESULTS

#### 9.2.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION


Channel	Frequency [MHz]	20 dB Bandwidth [kHz]
0	2 402	1 044
39	2 441	1 044
78	2 480	1 040
<b>Worst</b>		<b>1 044</b>

#### 9.2.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION


Channel	Frequency [MHz]	20 dB Bandwidth [kHz]
0	2 402	1 303
39	2 441	1 341
78	2 480	1 341
<b>Worst</b>		<b>1.341</b>

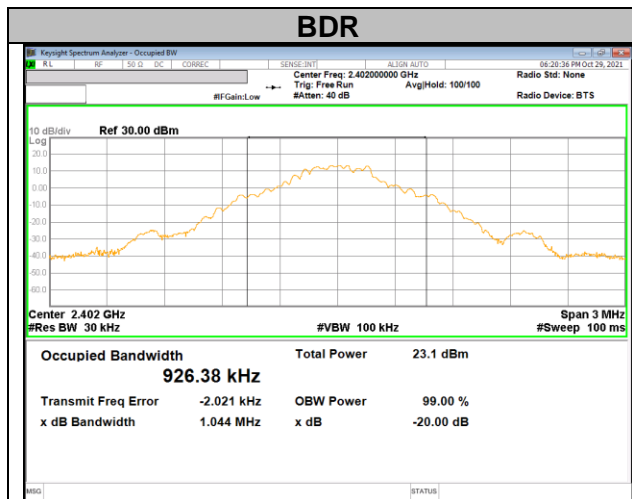


**20 dB bandwidth / 0 CHANNEL**

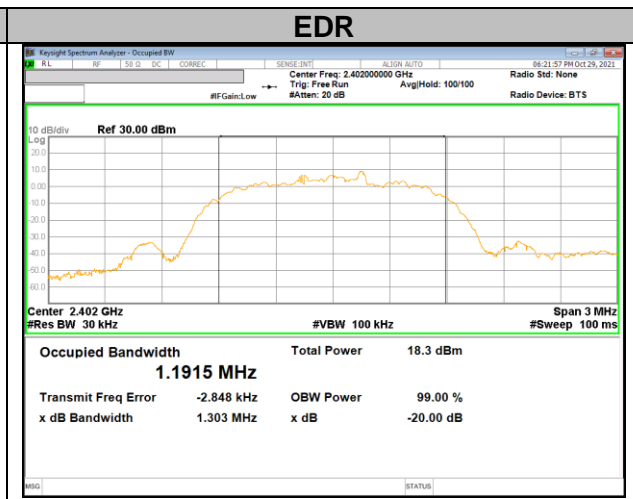


**20 dB bandwidth / 0 CHANNEL**

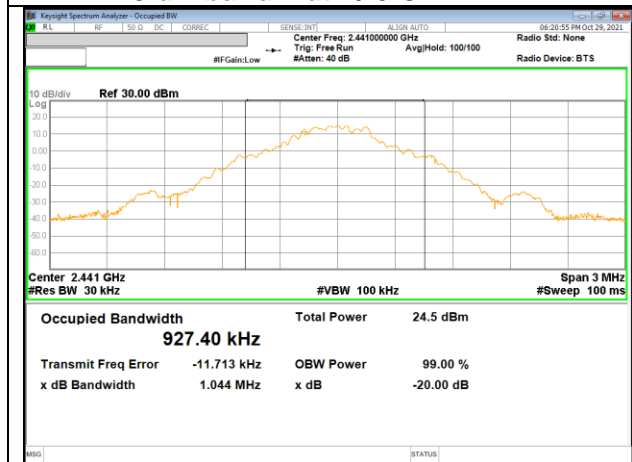


**20 dB bandwidth / 39 CHANNEL**

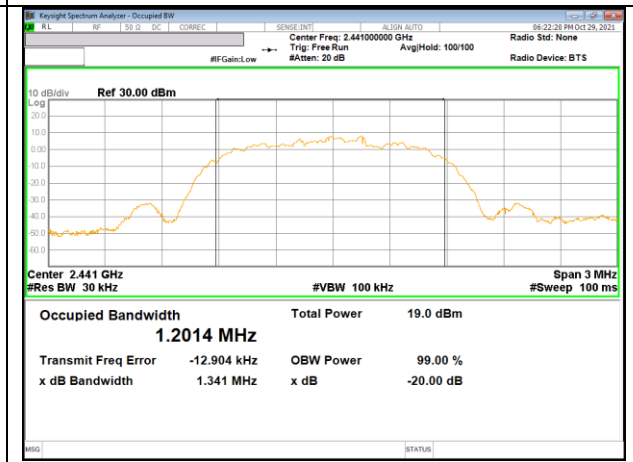

**20 dB bandwidth / 39 CHANNEL**

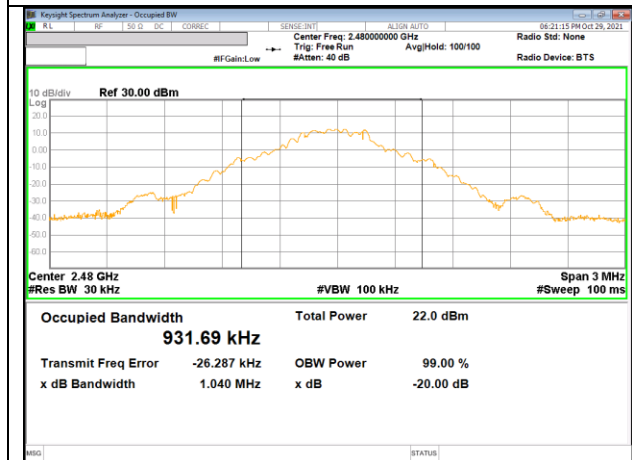

**20 dB bandwidth / 78 CHANNEL**

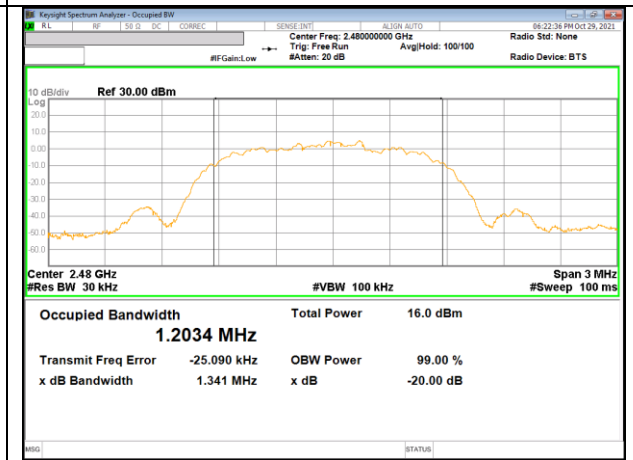

**20 dB bandwidth / 78 CHANNEL**



### **9.3. HOPPING FREQUENCY SEPARATION**

#### **LIMITS**

FCC §15.247 (a) (1)

RSS-247 (5.1) (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to  $VBW \geq RBW$ . The sweep time is coupled.


#### **RESULTS**

### 9.3.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

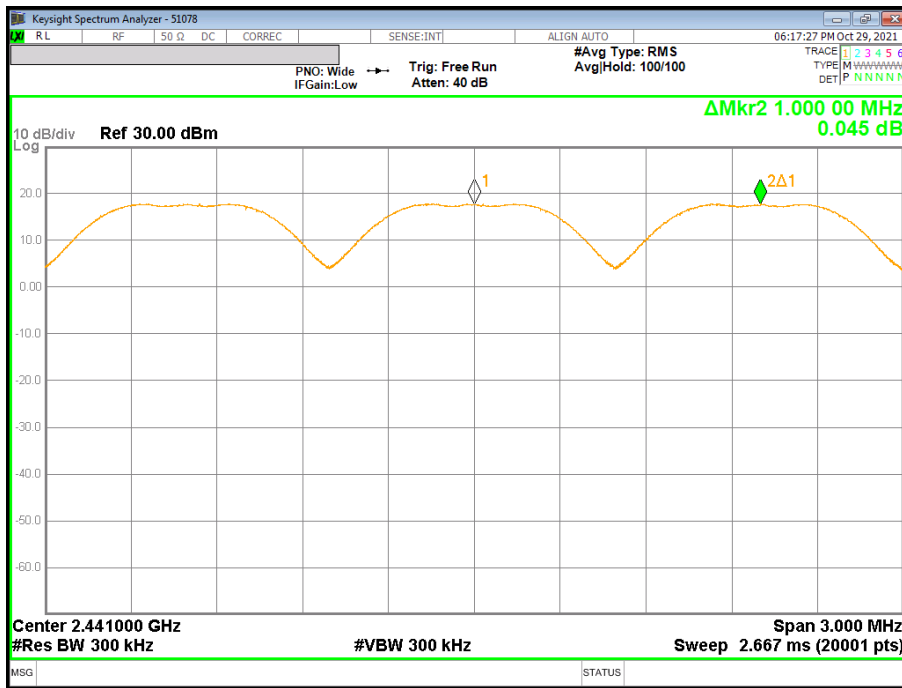

GFSK SEPARATION

### 9.3.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

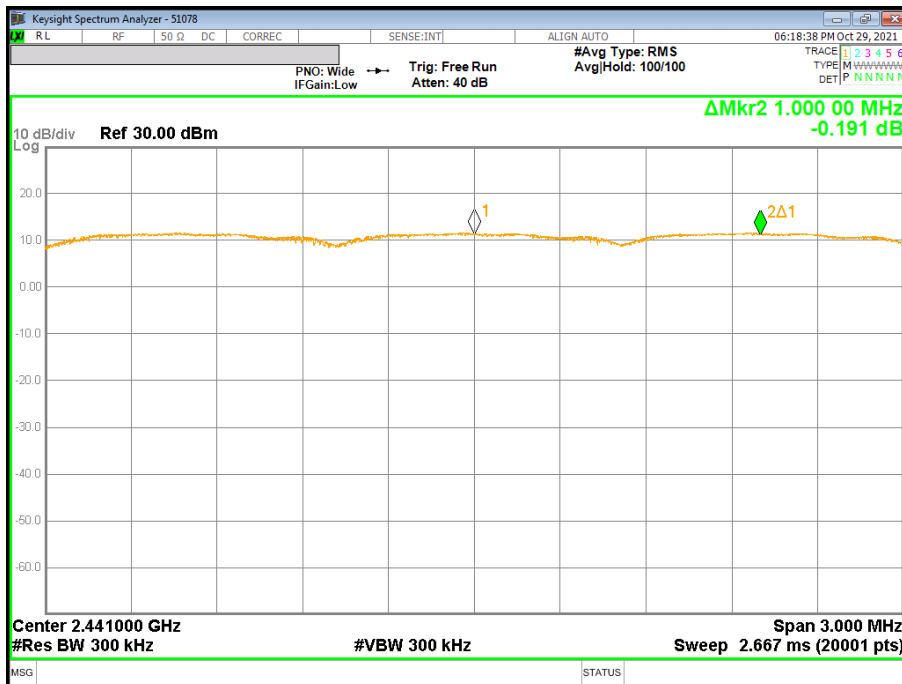

8PSK SEPARATION

---

## **9.4. NUMBER OF HOPPING CHANNELS**

### **LIMITS**

FCC §15.247 (a) (1) (iii)

RSS-247 (5.1) (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.





### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.


### **RESULTS**

Normal Mode: All Channels Observed


### 9.4.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

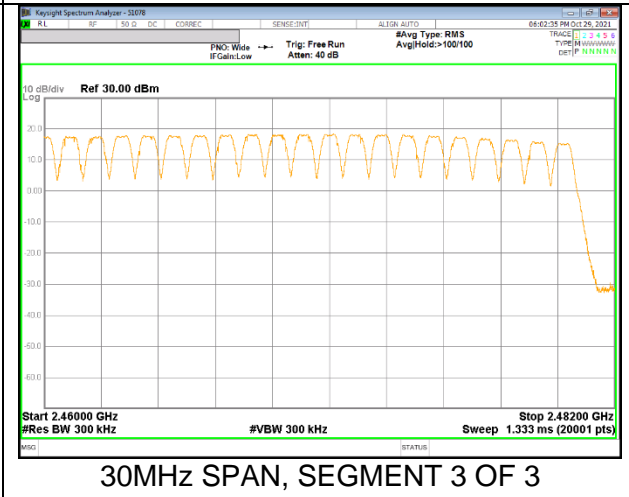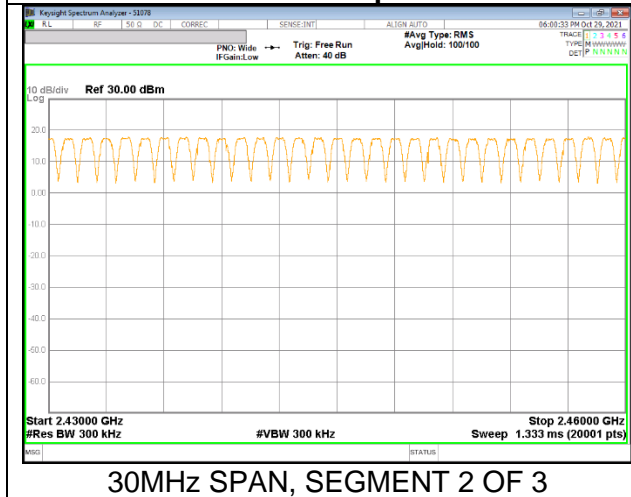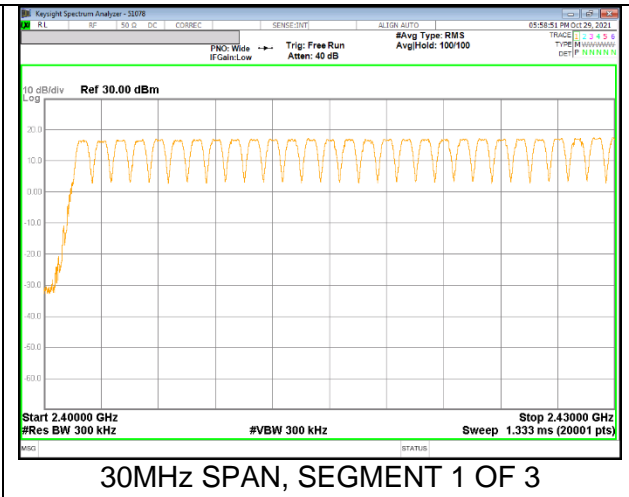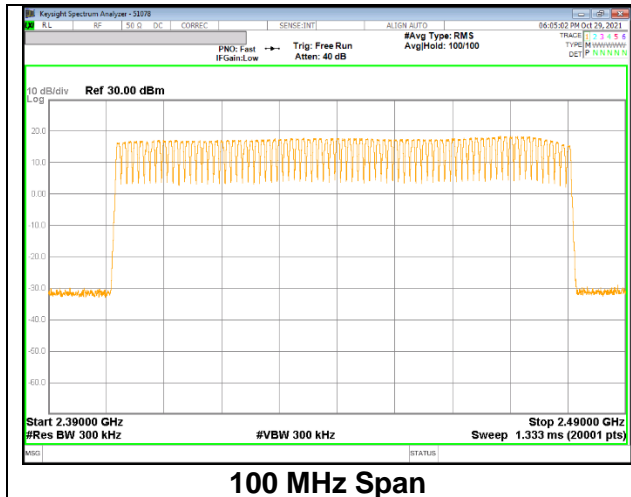


### 9.4.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

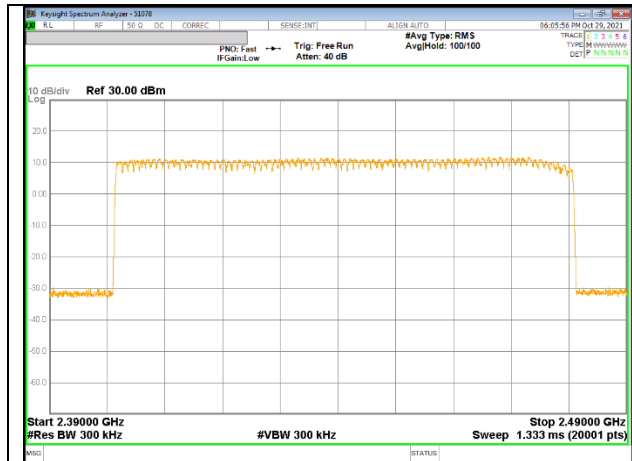


100 MHz Span

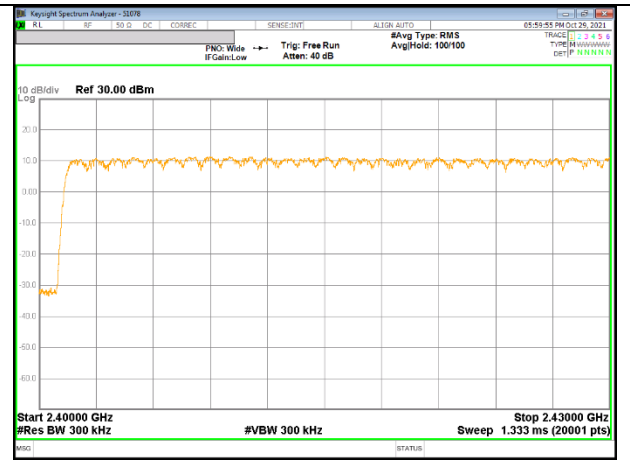

30MHz SPAN, SEGMENT 1 OF 3

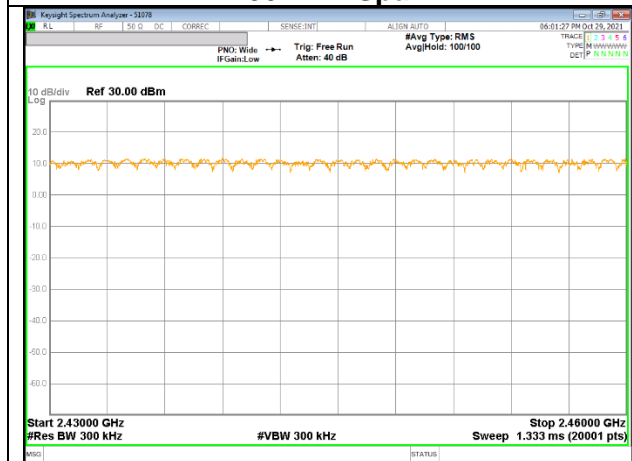

30MHz SPAN, SEGMENT 2 OF 3

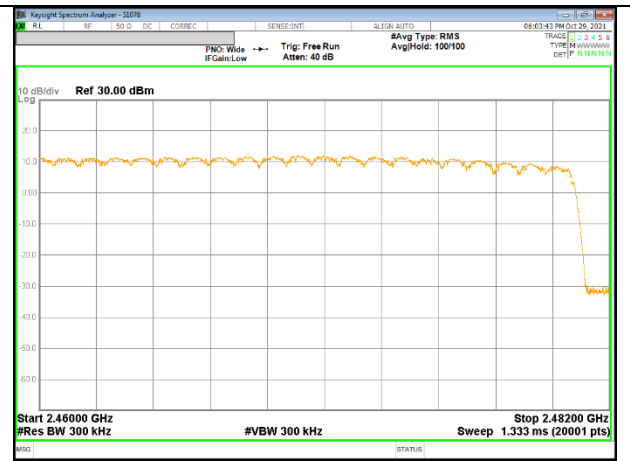

30MHz SPAN, SEGMENT 3 OF 3

## 9.5. AVERAGE TIME OF OCCUPANCY

### LIMITS

FCC §15.247 (a) (1) (iii)

RSS-247 (5.1) (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 3.16 second period (79 channels \* 0.4 s) is equal to  $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$ .

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels \* 0.4 seconds) is equal to  $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{ pulse width}$ .

### RESULTS

### 9.5.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

DH Packet	Pulse Width [msec]	Number of Pulses in 3.16 seconds	Average Time of Occupancy [msec]	Limit [msec]	Margin [msec]
GFSK Normal					
DH1	0.381	32	121.8	400.0	-278.2
DH3	1.636	16	261.8		-138.2
DH5	2.884	12	346.1		-53.9
GFSK AFH					
DH Packet	Pulse Width [msec]	Number of Pulses in 0.8 seconds	Average Time of Occupancy [msec]	Limit [msec]	Margin [msec]
GFSK AFH					
DH1	0.381	8	30.4	400.0	-369.6
DH3	1.636	4	65.4		-334.6
DH5	2.884	3	86.5		-313.5




**PULSE WIDTH – DH1**



**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH1**



**PULSE WIDTH – DH3**

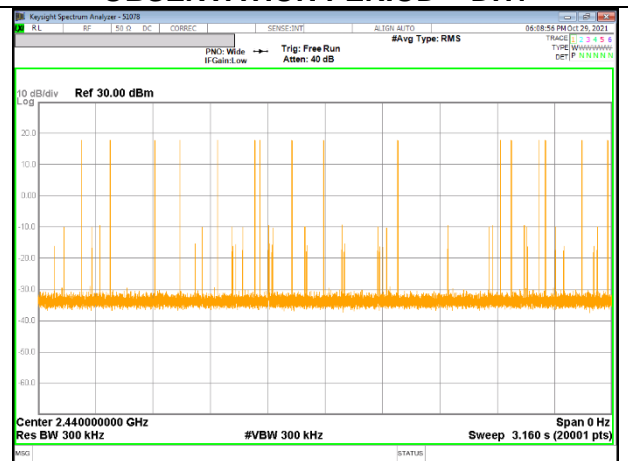

**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3**



**PULSE WIDTH – DH5**



**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5**




### 9.5.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION


DH Packet	Pulse Width [msec]	Number of Pulses in 3.16 seconds	Average Time of Occupancy [msec]	Limit [msec]	Margin [msec]
8PSK Normal					
DH1	0.386	32	123.6	400.0	-276.4
DH3	1.637	16	261.9		-138.1
DH5	2.889	10	288.9		-111.1
DH Packet	Pulse Width [msec]	Number of Pulses in 0.8 seconds	Average Time of Occupancy [msec]	Limit [msec]	Margin [msec]
8PSK AFH					
DH1	0.386	8	30.9	400.0	-369.1
DH3	1.637	4	65.5		-334.5
DH5	2.889	3	72.2		-327.8



**PULSE WIDTH – 3-DH1**

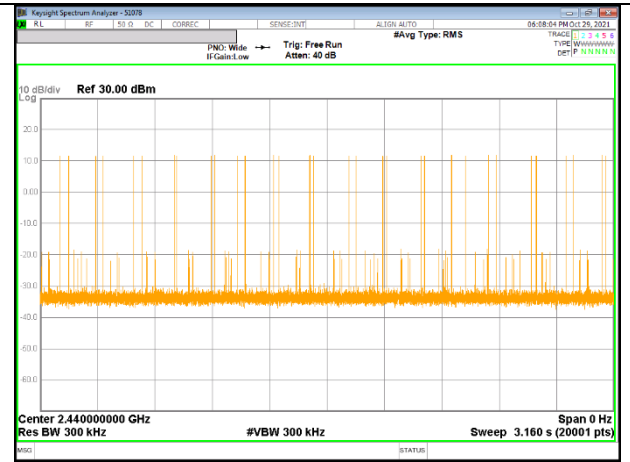


**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – 3-DH1**

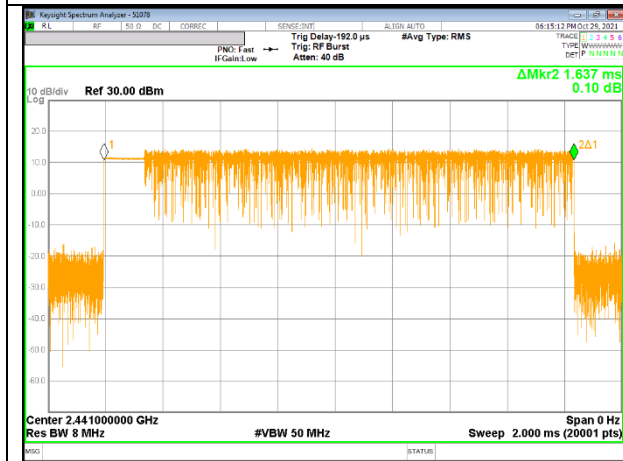


**PULSE WIDTH – 3-DH3**



**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – 3-DH3**

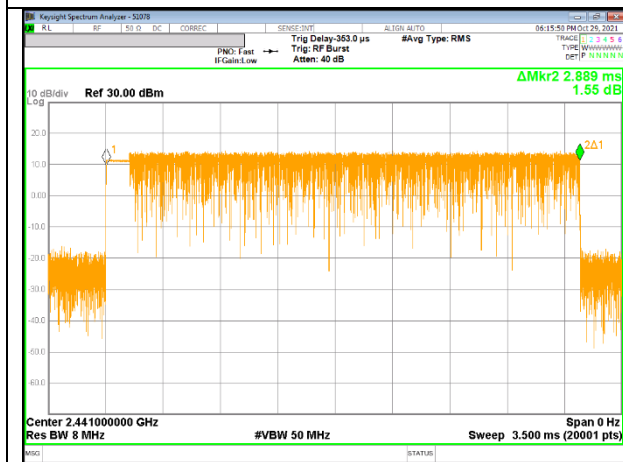

**PULSE WIDTH – 3-DH5**

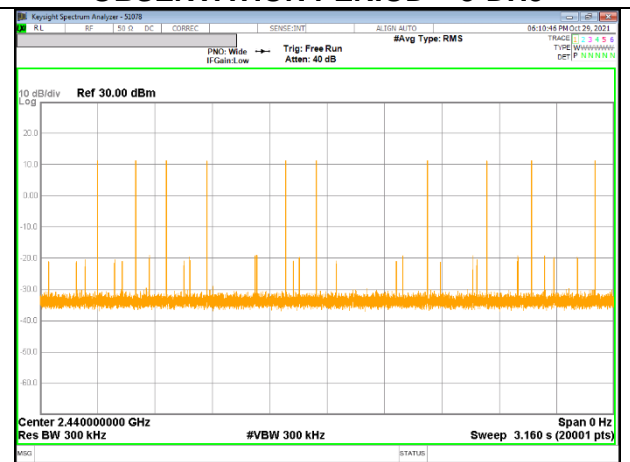

**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – 3-DH5**

## 9.6. OUTPUT POWER

### LIMITS

§15.247 (b) (1)

The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

### RESULTS

#### 9.6.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
0	2 402	16.316	21.000	-4.684
39	2 441	18.145		-2.855
78	2 480	15.259		-5.741
Worst		<b>18.145</b>		<b>-2.855</b>

#### 9.6.2. ENHANCED DATA RATE Pi/4-DPSK MODULATION


Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
0	2 402	12.407	21.000	-8.593
39	2 441	13.975		-7.025
78	2 480	10.550		-10.450
Worst		<b>13.975</b>		<b>-7.025</b>


#### 9.6.3. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
0	2 402	12.957	21.000	-8.043
39	2 441	14.424		-6.576
78	2 480	11.112		-9.888
Worst		<b>14.424</b>		<b>-6.576</b>

### 9.6.4. OUTPUT POWER PLOTS

#### PEAK OUTPUT POWER

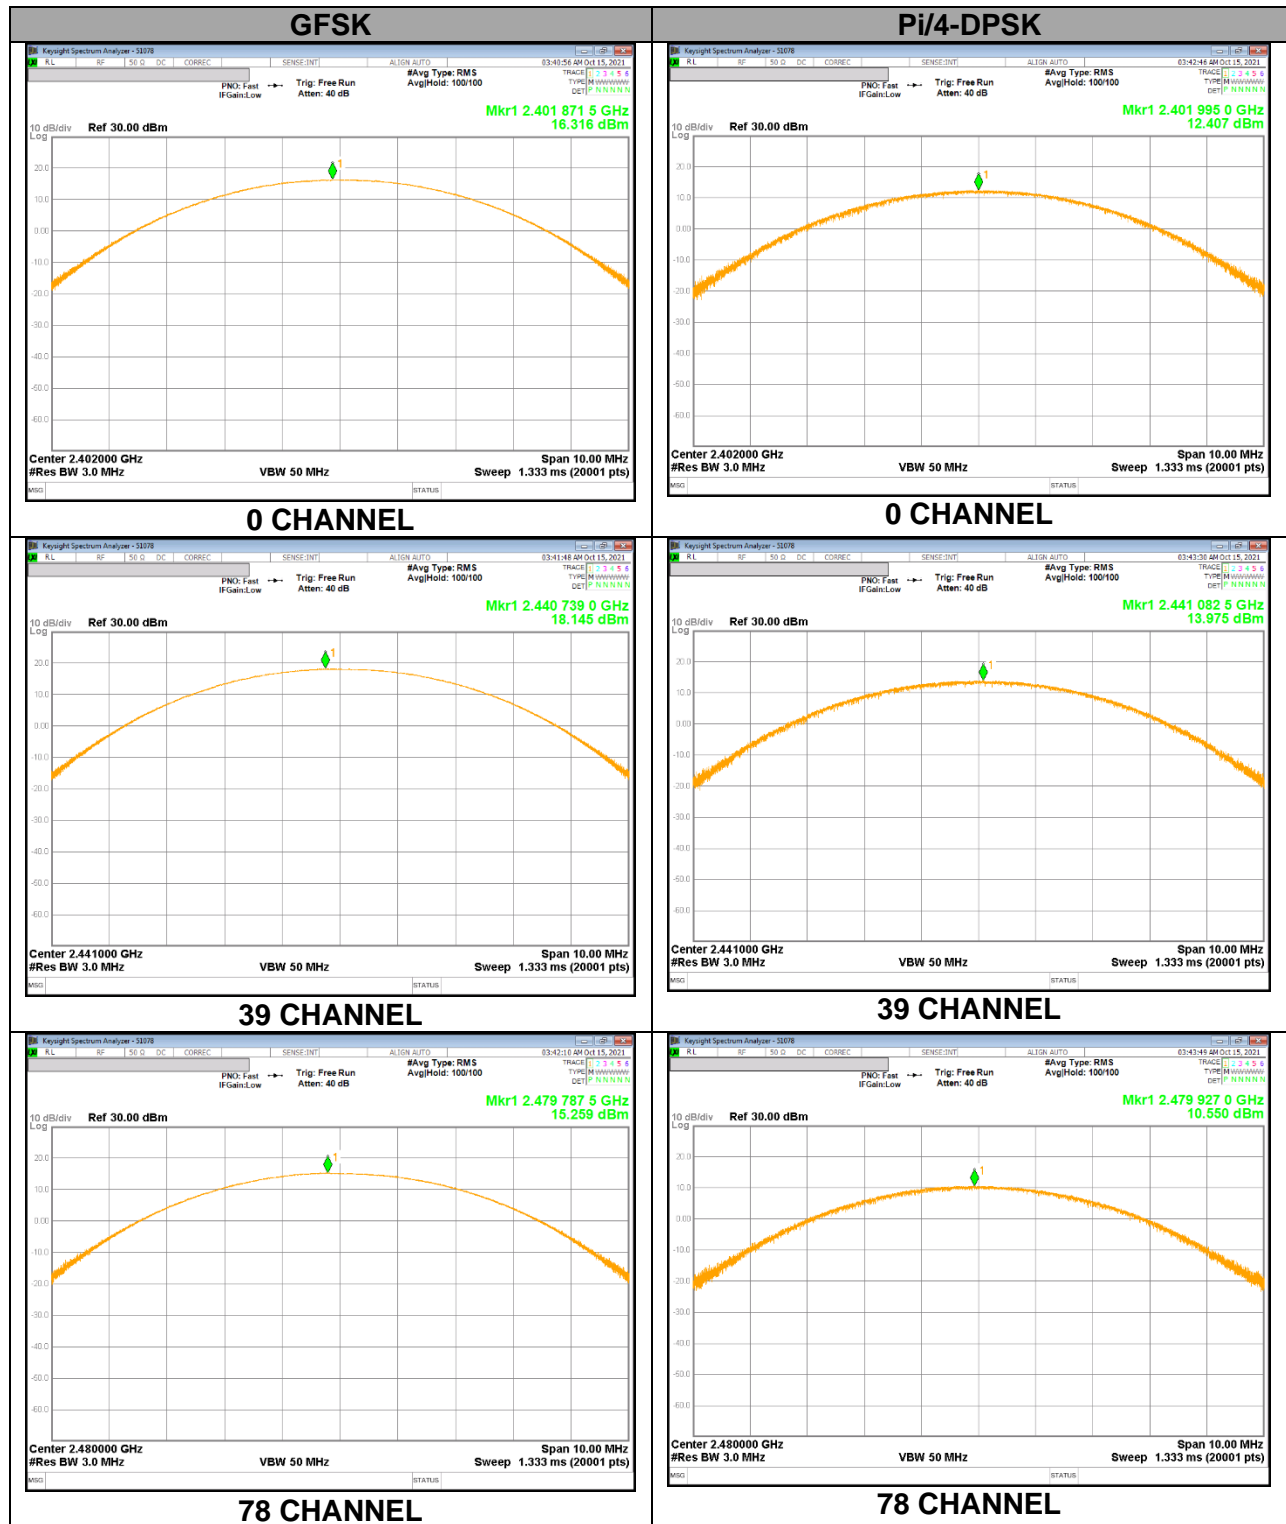

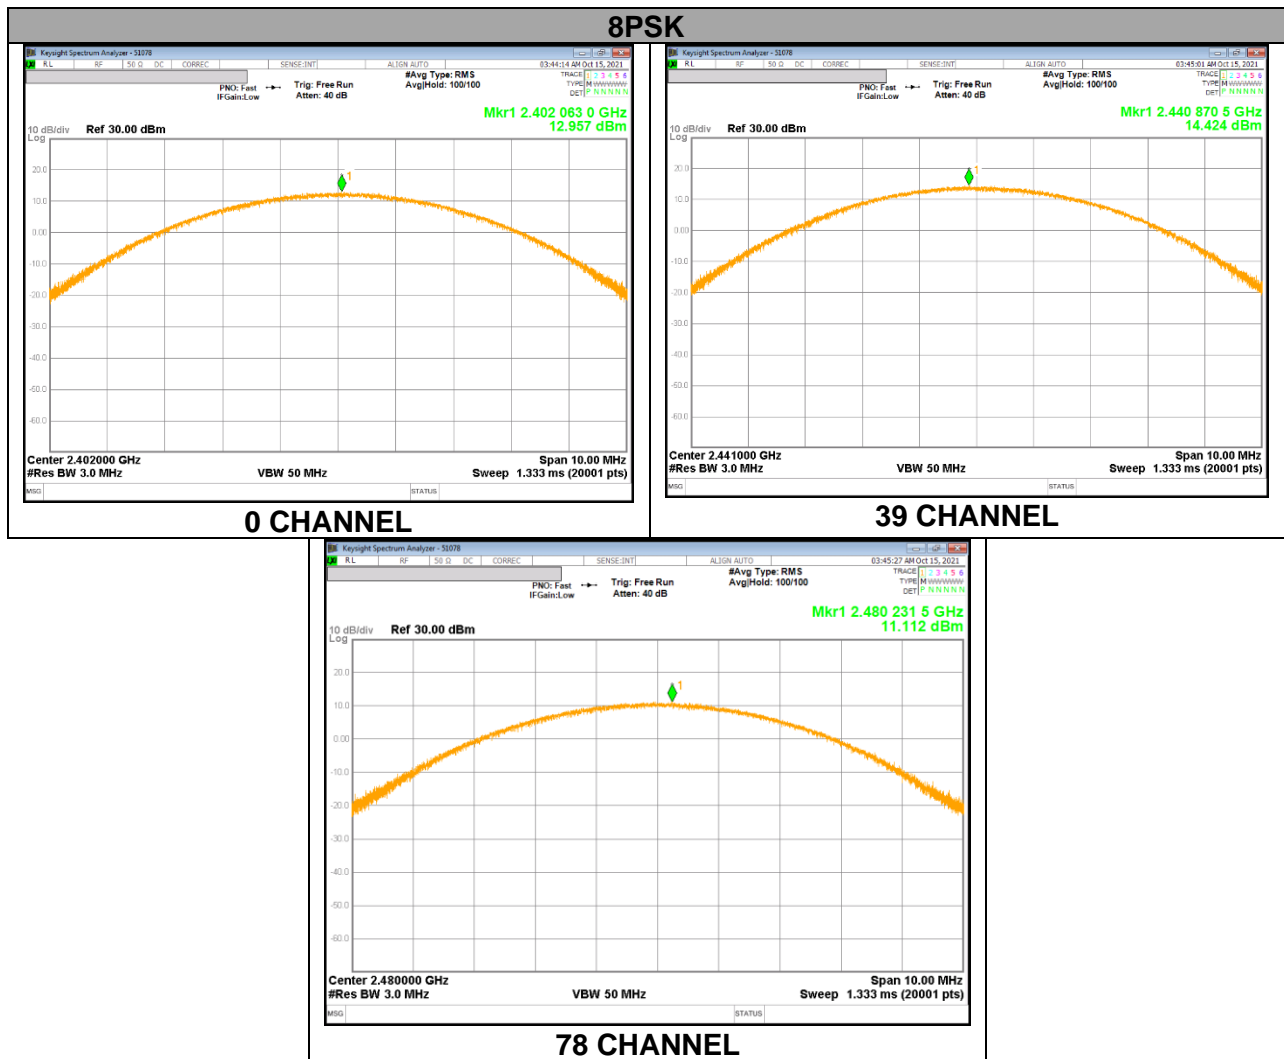

## 9.7. AVERAGE POWER

### LIMITS

None; for reporting purposes only

### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.  
 The cable assembly insertion loss was entered as an offset in the power meter to allow for direct reading of power.

### RESULTS

#### 9.7.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
0	2 402	15.738	37.480
39	2 441	17.696	58.830
78	2 480	14.812	30.283

#### 9.7.2. ENHANCED DATA RATE PI/4-DQPSK MODULATION

Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
0	2 402	9.758	9.458
39	2 441	11.286	13.446
78	2 480	7.982	6.284

#### 9.7.3. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
0	2 402	9.775	9.496
39	2 441	11.286	13.446
78	2 480	7.981	6.281

## **9.8. CONDUCTED SPURIOUS EMISSIONS**

### **LIMITS**

FCC §15.247 (d)

Limit = -20 dBc

### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The band-edges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.


### **RESULTS**

## 9.8.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

### SPURIOUS EMISSIONS, NON-HOPPING

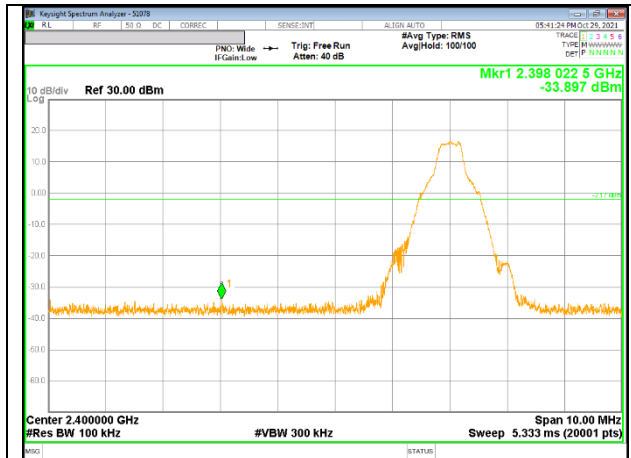


**0 CHANNEL BANDEDGE**

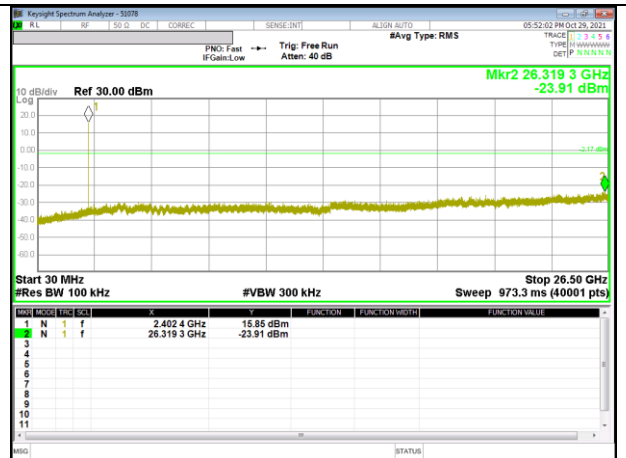


**OUT-OF-BAND 0 CHANNEL**




**IN-BAND REFERENCE LEVEL**

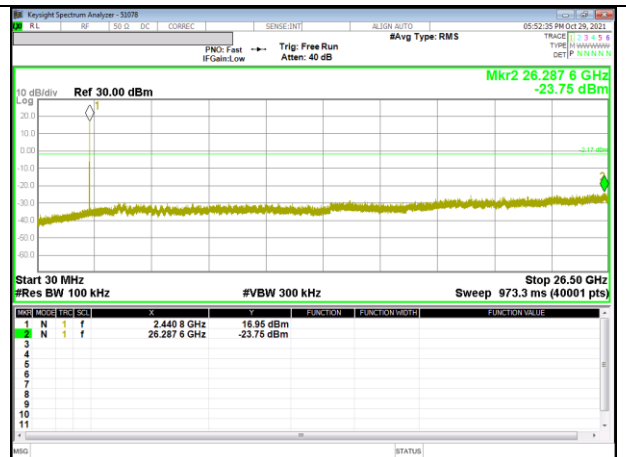

**OUT-OF-BAND 39 CHANNEL**

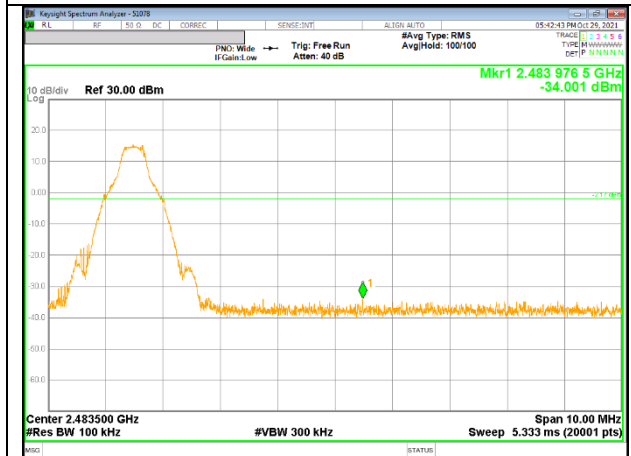

**78 CHANNEL BANDEDGE**

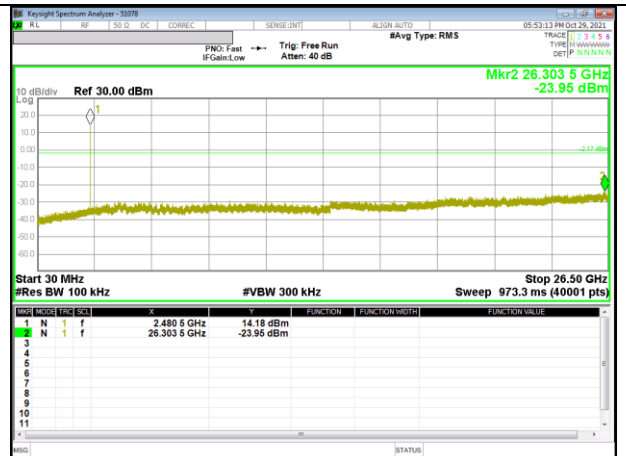

**OUT-OF-BAND 78 CHANNEL**




**SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON**




## 9.8.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION


### SPURIOUS EMISSIONS, NON-HOPPING

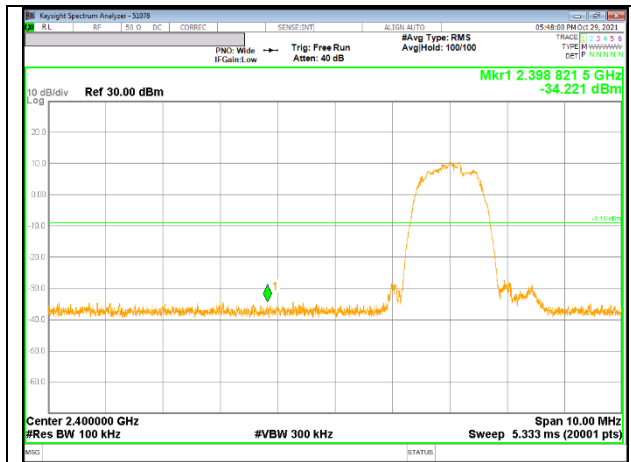


**0 CHANNEL BANDEDGE**

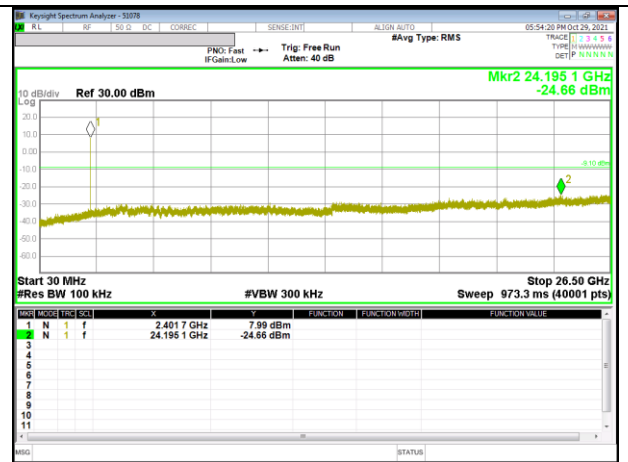


**OUT-OF-BAND 0 CHANNEL**

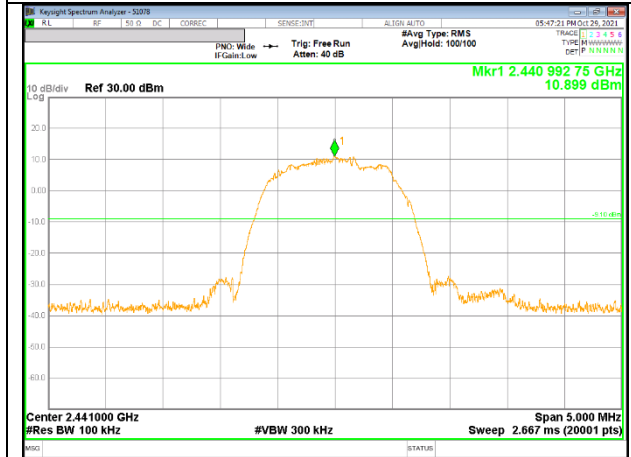


**IN-BAND REFERENCE LEVEL**

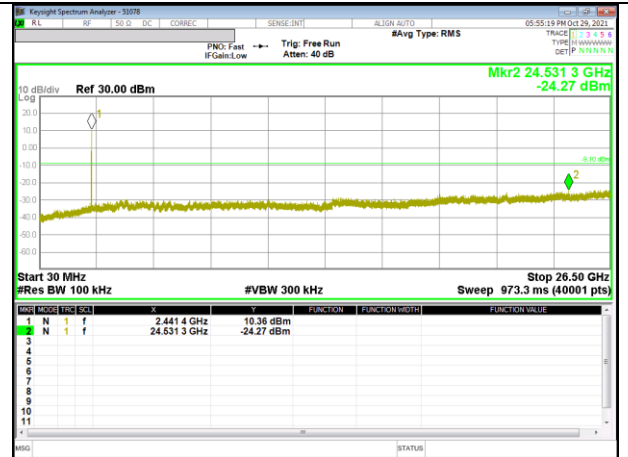

**OUT-OF-BAND 39 CHANNEL**

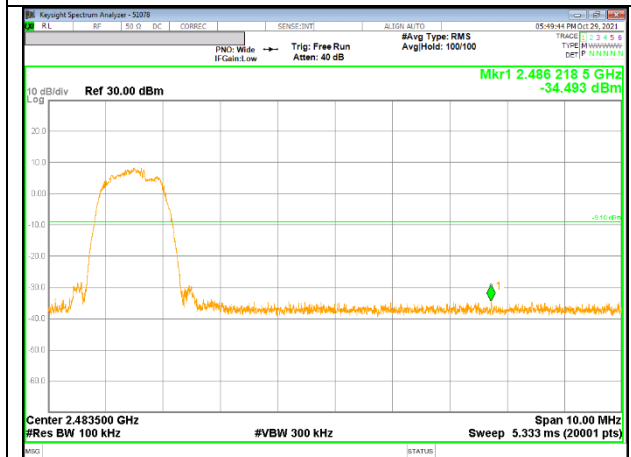

**78 CHANNEL BANDEDGE**

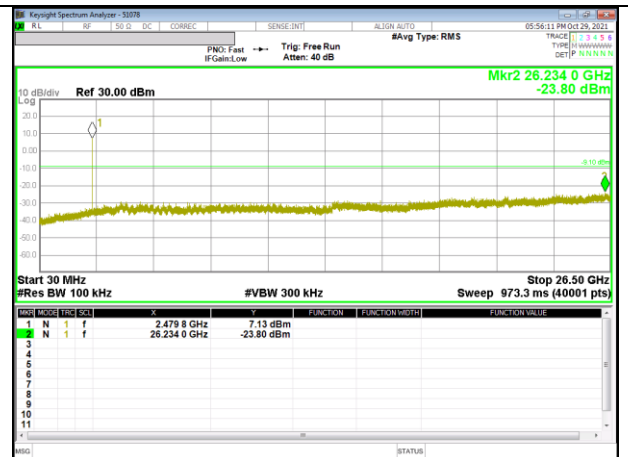

**OUT-OF-BAND 78 CHANNEL**

**SPURIOUS BANDEGE EMISSIONS WITH HOPPING ON**



## 10. RADIATED TEST RESULTS

### LIMITS

FCC §15.205 and §15.209

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

FCC Part 15.205 (a) : Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	MHz	GHz	GHz
0.009 – 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 – 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~ 12.52025	149.9 ~ 150.05	1645.5 ~ 1646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.57675 ~ 12.57725	156.52475 ~	1660 ~ 1710	8.025 ~ 8.5	22.01 ~ 23.12
4.17725 ~ 4.17775	13.36 ~ 13.41	156.52525	1718.8 ~ 1722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.20725 ~ 4.20775	16.42 ~ 16.423	156.7 ~ 156.9	2200 ~ 2300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	16.69475 ~ 16.69525	162.0125 ~	2310 ~ 2390	10.6 ~ 12.7	36.43 ~ 36.5
6.26775 ~ 6.26825	16.80425 ~ 16.80475	167.17	2483.5 ~ 2500	13.25 ~ 13.4	Above 38.6
6.31175 ~ 6.31225	25.5 ~ 25.67	167.72 ~ 173.2	2655 ~ 2900		
8.291 ~ 8.294	37.5 ~ 38.25	240 ~ 285	3260 ~ 3267		
8.362 ~ 8.366	73 ~ 74.6	322 ~ 335.4	3332 ~ 3339		
8.37625 ~ 8.38675	74.8 ~ 75.2	399.90 ~ 410	3345.8 ~ 3358		
		608 ~ 614	3600 ~ 4400		
		960 ~ 1240			

▪ FCC Part 15.205(b) : The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

---

**TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements.(Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.)

For band edge measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1/T (on time) for average measurement.

$$\text{GFSK} = 1/T = 1 / 0.00288\text{s} = 347\text{Hz}.$$

The minimum VBW was 347Hz, but test receiver(ESU40) couldn't set value 347Hz. Due to this reason, testing VBW was set to 500Hz(Worst cases).

The spectrum from 1GHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.  
(From 30MHz to 1GHz, test was performed with the EUT set to transmit at the channel with highest output power)

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note : Emission was pre-scanned from 9kHz to 30MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).  
Per FCC part 15.31(o), test results were not reported.


Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 m open are test site.  
Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the one of tests made in an open field based on KDB 414788.

## 10.1. TRANSMITTER ABOVE 1 GHz

### 10.1.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

#### BANDEDGE (0 CHANNEL)

#### HORIZONTAL RESULT

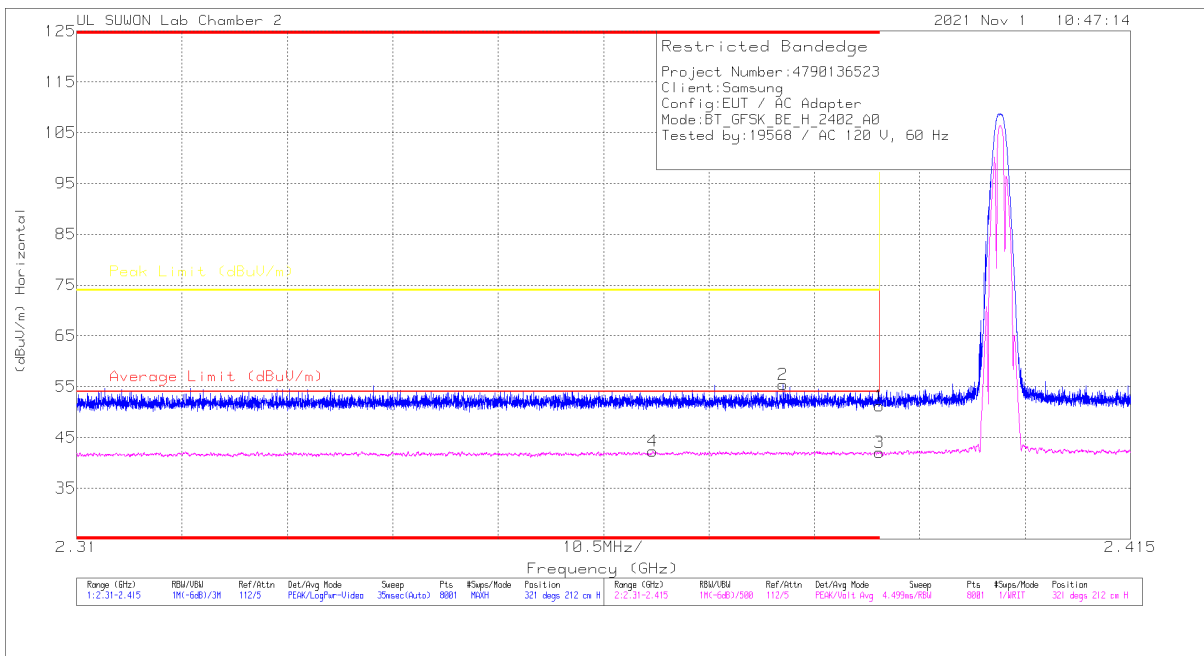

#### Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	39.92	Pk	31.9	-20.6	51.22	-	-	74	-22.78	321	212	H
2	* 2.38039	44.05	Pk	31.9	-20.6	55.35	-	-	74	-18.65	321	212	H
3	* 2.39	30.77	VA1T	31.9	-20.6	42.07	54	-11.93	-	-	321	212	H
4	* 2.36738	31.1	VA1T	31.8	-20.6	42.3	54	-11.7	-	-	321	212	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average  $V_B=1/T_{on}$  where:  $T_{on}$  is transmit duration

### VERTICAL RESULT

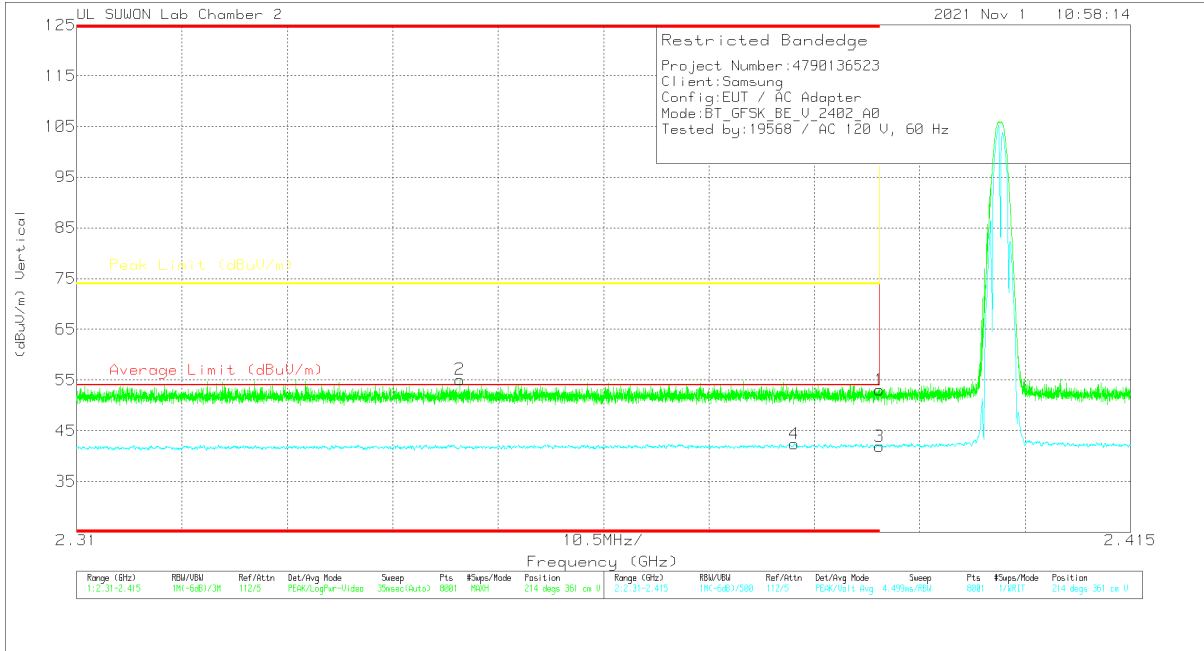

### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	41.7	PK	31.9	-20.6	53	-	-	74	-21	214	361	V
2	* 2.34819	43.89	PK	31.8	-20.6	55.09	-	-	74	-18.91	214	361	V
3	* 2.39	30.57	VA1T	31.9	-20.6	41.87	54	-12.13	-	-	214	361	V
4	* 2.38147	31.08	VA1T	31.9	-20.6	42.38	54	-11.62	-	-	214	361	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

VA1T - FHSS: Linear Voltage Average  $V_B=1/T_{on}$  where:  $T_{on}$  is transmit duration

**BANDEDGE (78 CHANNEL)**

**HORIZONTAL RESULT**

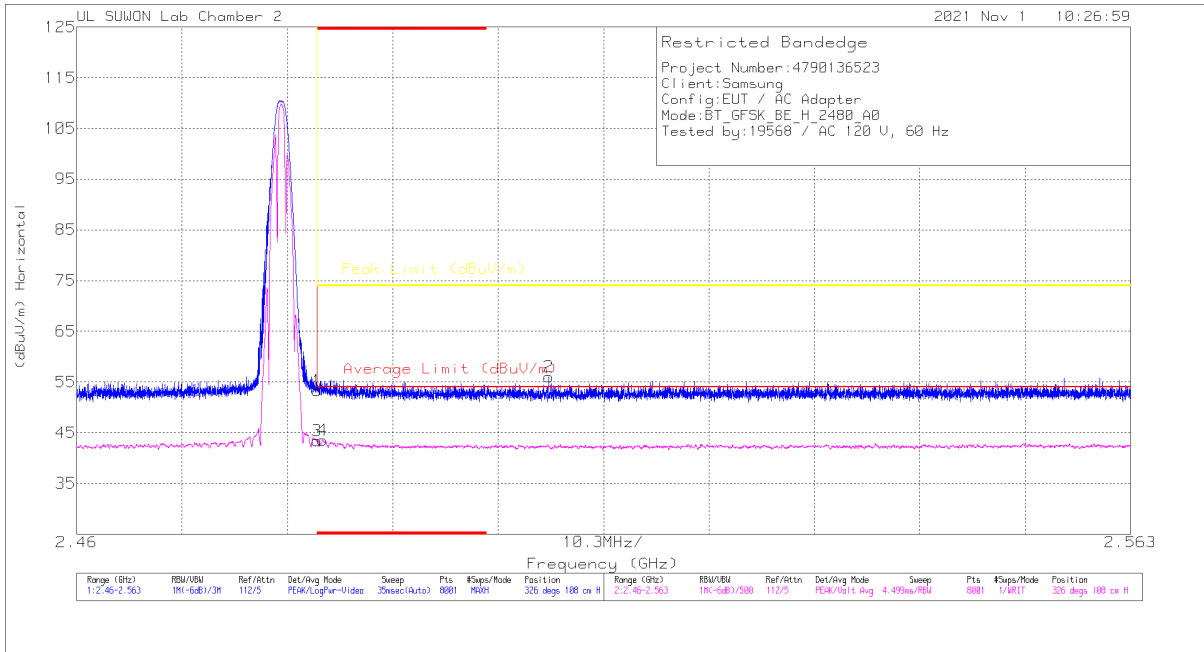


**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	41.68	Pk	32	-20.4	53.28	-	-	74	-20.72	326	108	H
2	2.50616	44.26	Pk	32.1	-20.4	55.96	-	-	74	-18.04	326	108	H
3	* 2.48351	31.84	VA1T	32	-20.4	43.44	54	-10.56	-	-	326	108	H
4	* 2.48402	31.88	VA1T	32	-20.4	43.48	54	-10.52	-	-	326	108	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration



### VERTICAL RESULT

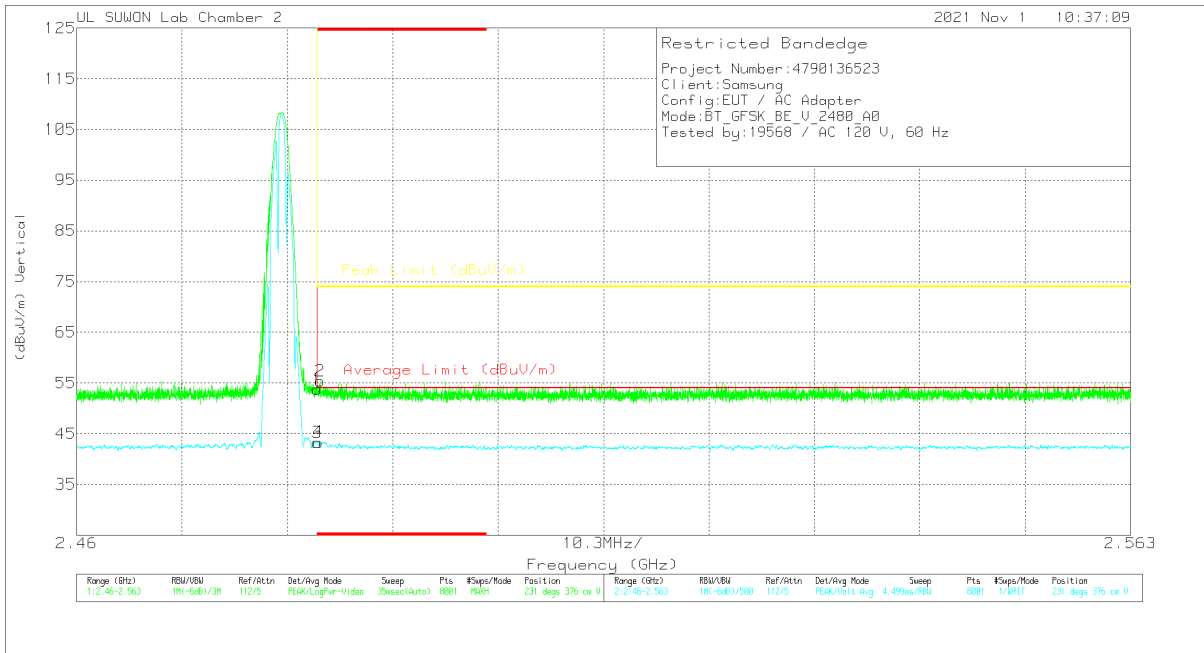


### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	42.16	Pk	32	-20.4	53.76	-	-	74	-20.24	231	376	V
2	* 2.48378	43.8	Pk	32	-20.4	55.4	-	-	74	-18.6	231	376	V
3	* 2.48351	31.64	VA1T	32	-20.4	43.24	54	-10.76	-	-	231	376	V
4	* 2.48361	31.74	VA1T	32	-20.4	43.34	54	-10.66	-	-	231	376	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

**HARMONICS AND SPURIOUS EMISSIONS**

**0 CHANNEL RESULTS**

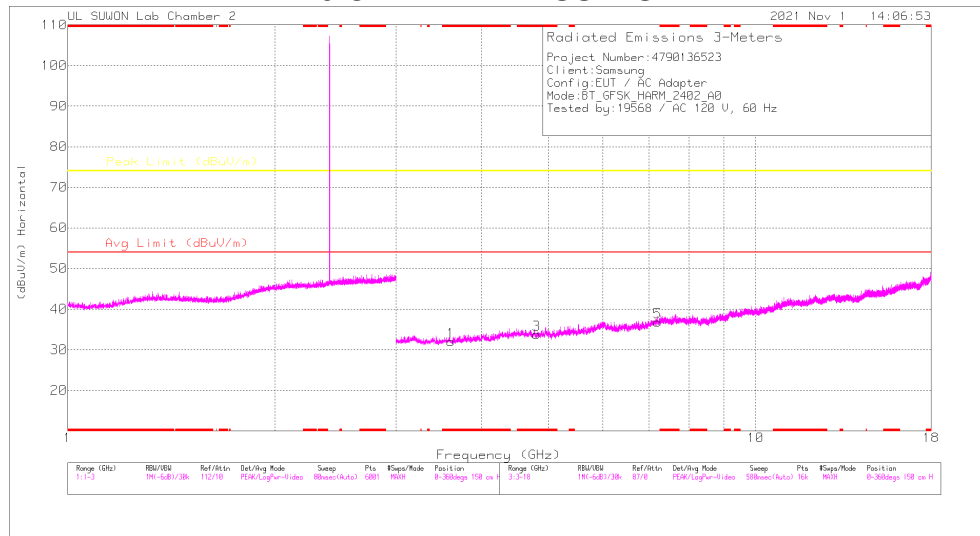

**HORIZONTAL**

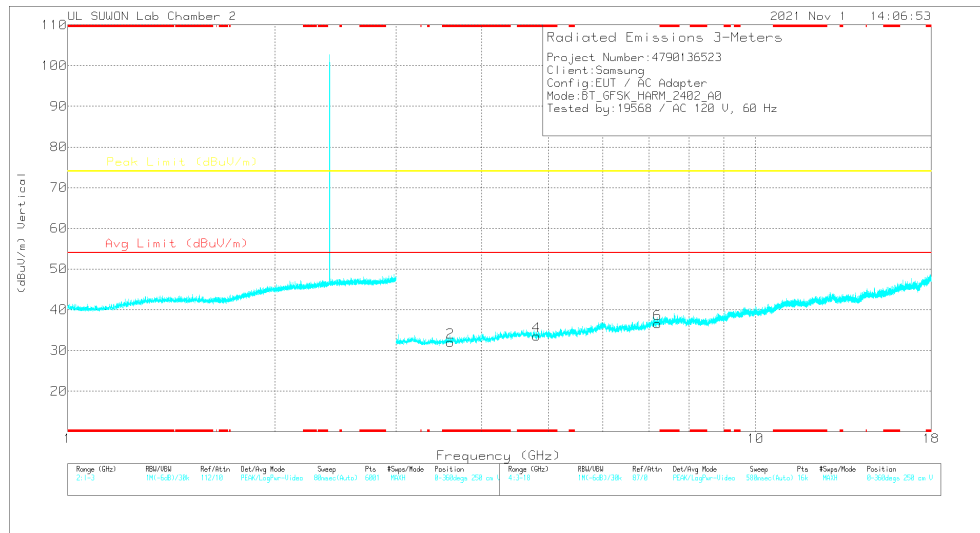


**VERTICAL**

**RADIATED EMISSIONS**


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0016872_4	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.60436	35.13	PKFH	32.8	-28.3	0	39.63	-	-	74	-34.37	0	100	H
* 3.60228	35.6	PKFH	32.8	-28.3	0	40.1	-	-	74	-33.9	0	100	V
* 4.81249	34.72	PKFH	34.1	-28	0	40.82	-	-	74	-33.18	0	100	H
* 4.79953	35.69	PKFH	34.1	-28	0	41.79	-	-	74	-32.21	0	100	V
7.20348	34.52	PKFH	36.2	-25.3	0	45.42	-	-	74	-28.58	0	100	H
7.20502	33.71	PKFH	36.2	-25.3	0	44.61	-	-	74	-29.39	0	100	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PKFH FHSS/BT RB=100k for Frequencies<1GHz / RB=1MHz for Frequencies>1GHz, VB=3 x RB, Peak

### 39 CHANNEL RESULTS

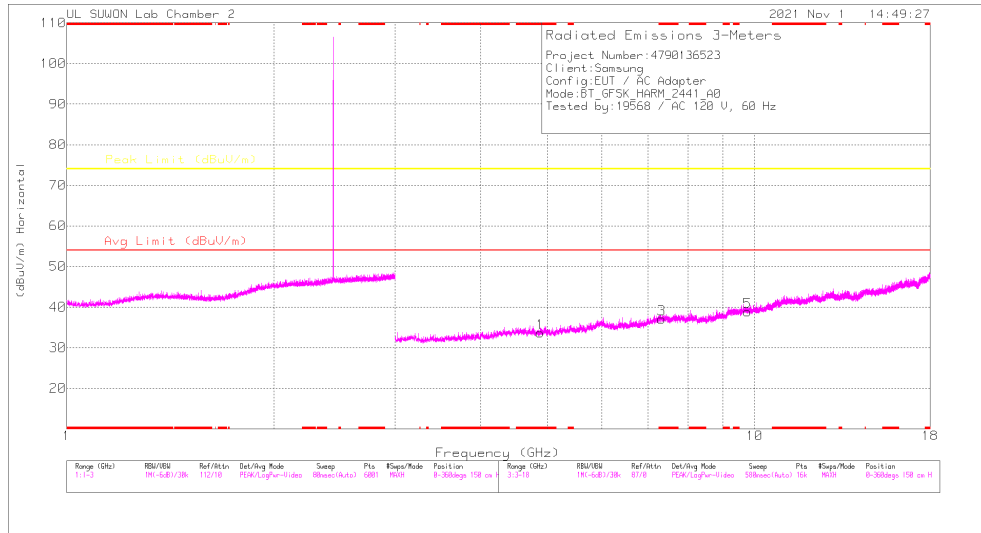

### HORIZONTAL

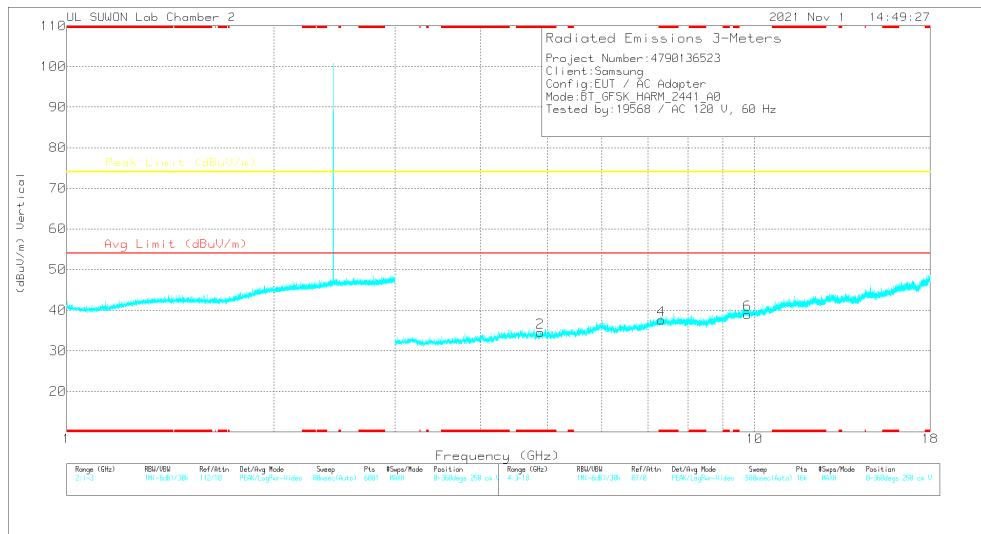


### VERTICAL

### RADIATED EMISSIONS


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0016872_4	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.88264	35.4	PKFH	34.1	-27.8	0	41.7	-	-	74	-32.3	360	100	H
* 4.87074	35.31	PKFH	34.1	-27.9	0	41.51	-	-	74	-32.49	360	100	V
* 7.32473	33.87	PKFH	36.1	-24.8	0	45.17	-	-	74	-28.83	360	100	H
* 7.32113	33.73	PKFH	36.1	-24.9	0	44.93	-	-	74	-29.07	360	100	V
9.76477	31.1	PKFH	37.2	-21.5	0	46.8	-	-	74	-27.2	360	100	H
9.76667	31.11	PKFH	37.2	-21.5	0	46.81	-	-	74	-27.19	360	100	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PKFH FHSS/BT RB=100k for Frequencies<1GHz / RB=1MHz for Frequencies>1GHz, VB=3 x RB, Peak

### 78 CHANNEL RESULTS

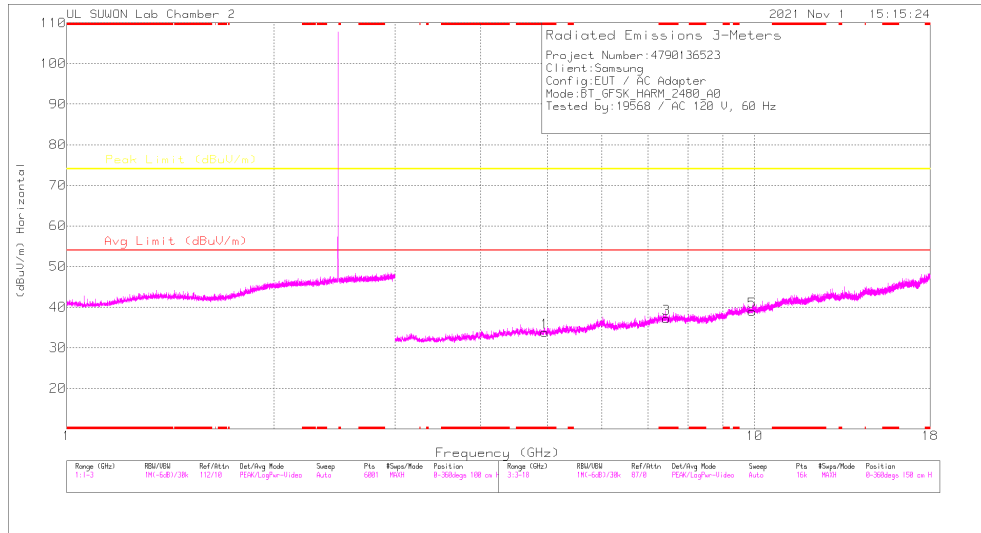

### HORIZONTAL

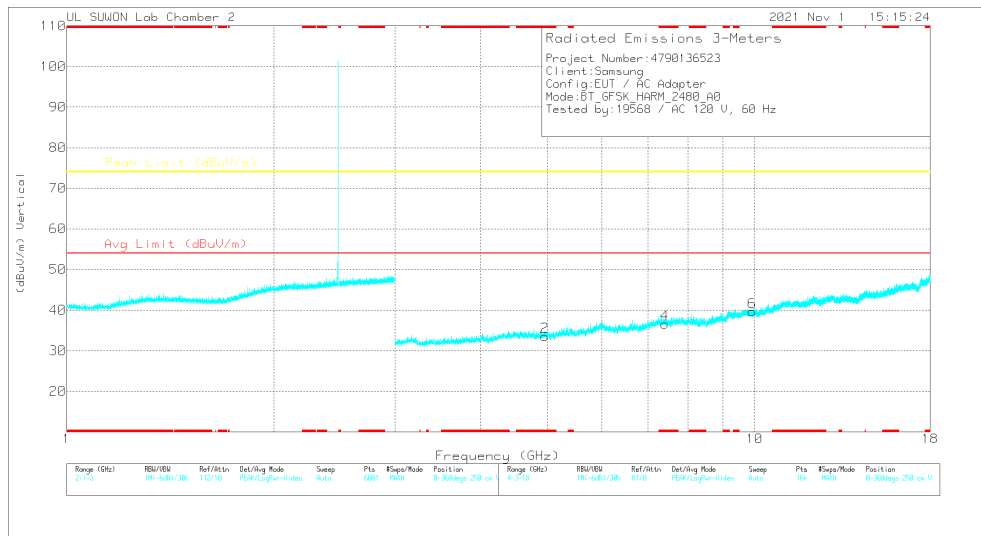

### VERTICAL

### RADIATED EMISSIONS


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0016872_4	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.98337	35.05	PKFH	34.1	-27.2	0	41.95	-	-	74	-32.05	360	100	H
* 4.95936	34.81	PKFH	34.1	-27.2	0	41.71	-	-	74	-32.29	360	100	V
* 7.4503	33.4	PKFH	36	-24.1	0	45.3	-	-	74	-28.7	360	100	H
* 7.405	33.63	PKFH	36.1	-24.1	0	45.63	-	-	74	-28.37	360	100	V
9.91324	30.68	PKFH	37.4	-21.3	0	46.78	-	-	74	-27.22	360	100	H
9.91174	30.91	PKFH	37.4	-21.3	0	47.01	-	-	74	-26.99	360	100	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PKFH FHSS/BT RB=100k for Frequencies<1GHz / RB=1MHz for Frequencies>1GHz, VB=3 x RB, Peak

## 10.1.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

### BANDEDGE (0 CHANNEL)

### HORIZONTAL RESULT

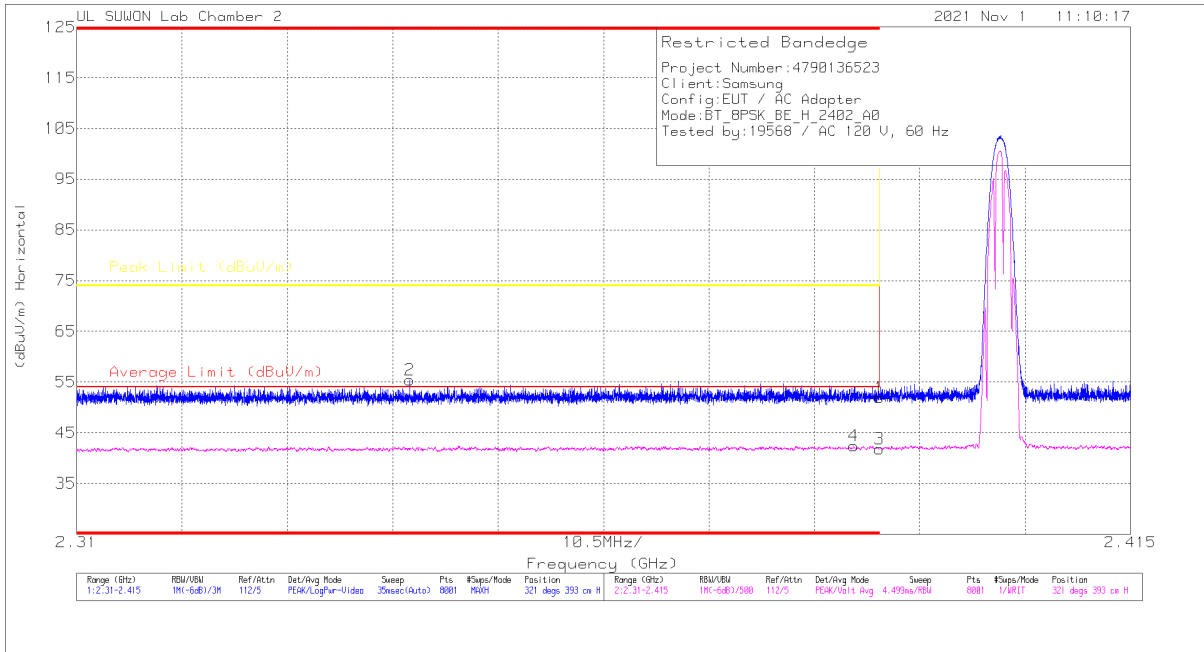

### Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	40.58	Pk		-20.6	51.88	-	-	74	-22.12	321	393	H
2	* 2.34319	44.28	Pk		-20.7	55.38	-	-	74	-18.62	321	393	H
3	* 2.39	30.53	VA1T		-20.6	41.83	54	-12.17	-	-	321	393	H
4	* 2.38742	31.06	VA1T		-20.6	42.36	54	-11.64	-	-	321	393	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

### VERTICAL RESULT

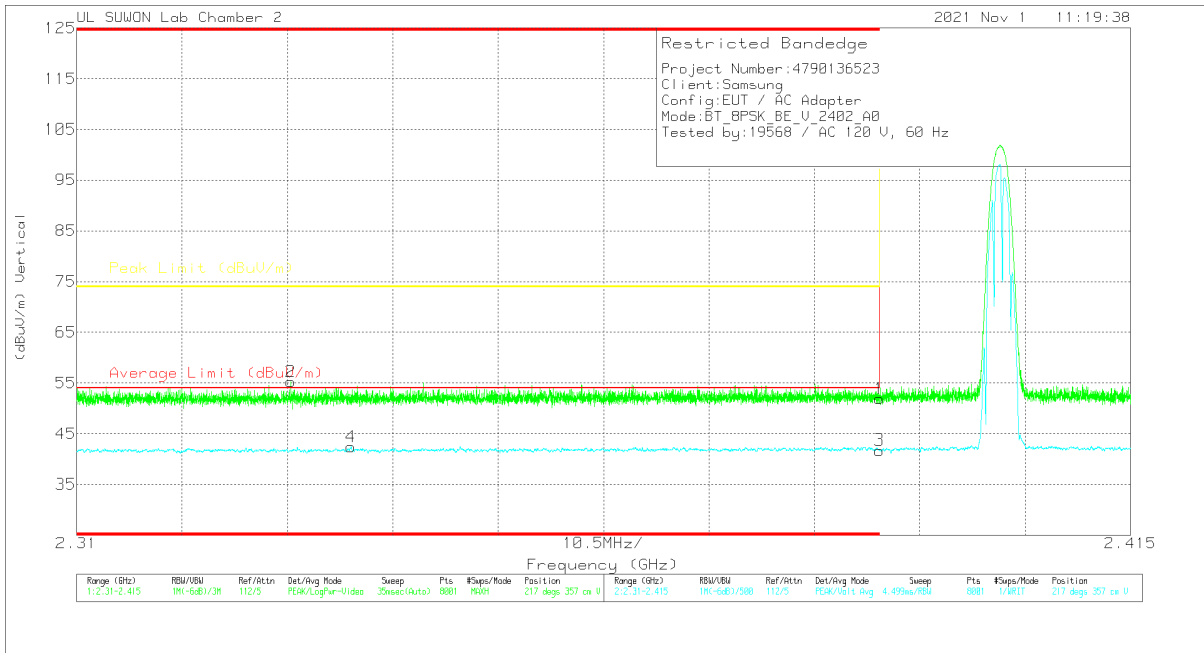


### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	40.65	Pk	31.9	-20.6	51.95	-	-	74	-22.05	217	357	V
2	* 2.33133	44.22	Pk	31.8	-20.7	55.32	-	-	74	-18.68	217	357	V
3	* 2.39	30.43	VA1T	31.9	-20.6	41.73	54	-12.27	-	-	217	357	V
4	* 2.33734	31.24	VA1T	31.8	-20.6	42.44	54	-11.56	-	-	217	357	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

**BANDEDGE (78 CHANNEL)**

**HORIZONTAL RESULT**

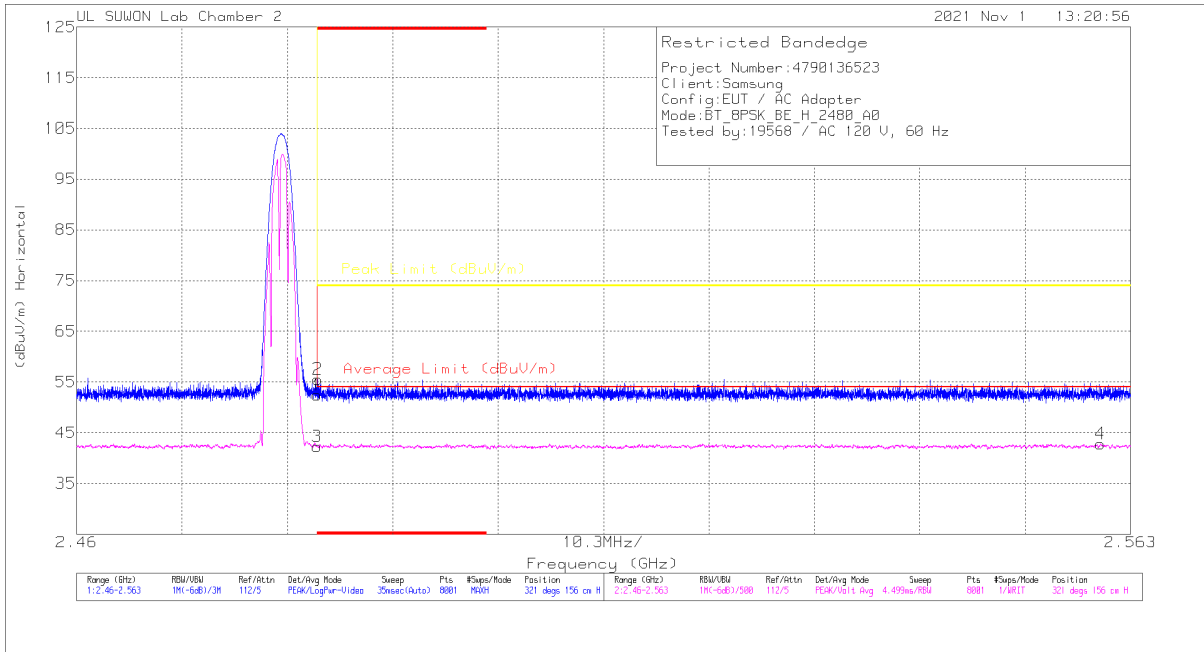


**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	40.87	Pk	32	-20.4	62.47	-	-	74	-21.53	321	156	H
2	* 2.48357	43.98	Pk	32	-20.4	65.58	-	-	74	-18.42	321	156	H
3	* 2.48351	30.67	VA1T	32	-20.4	42.27	54	-11.73	-	-	321	156	H
4	2.56006	30.84	VA1T	32.2	-20.2	42.84	54	-11.16	-	-	321	156	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

### VERTICAL RESULT

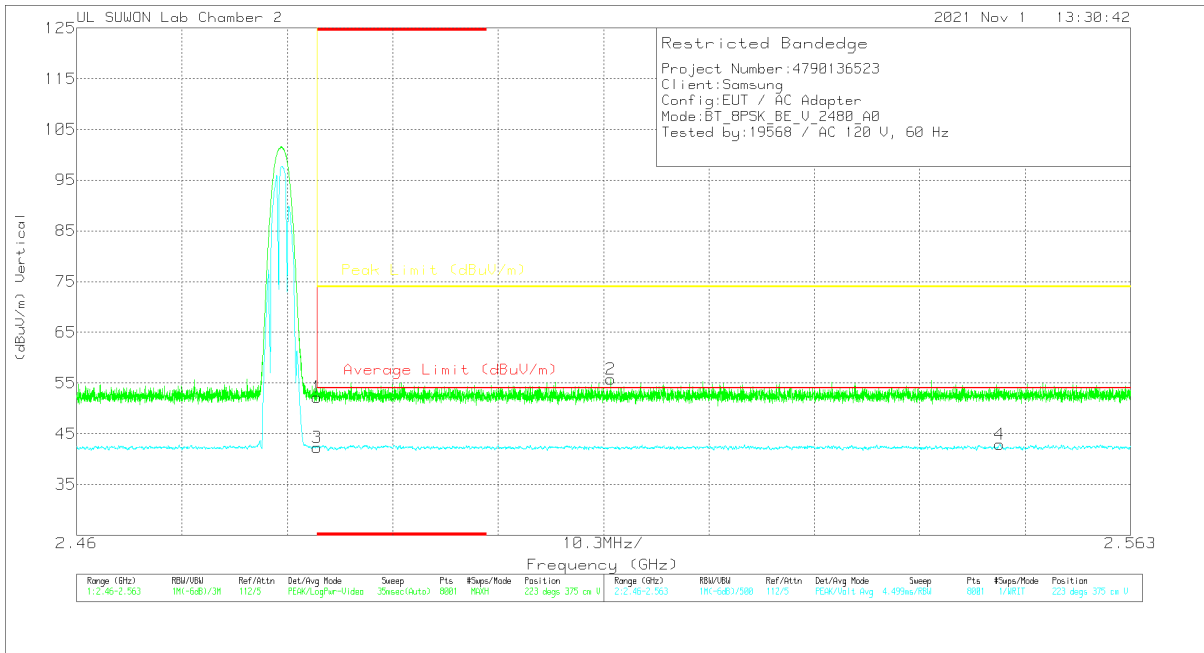

### Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	40.64	Pk	32	-20.4	52.24	-	-	74	-21.76	223	375	V
2	2.51222	44.03	Pk	32.1	-20.4	55.73	-	-	74	-18.27	223	375	V
3	* 2.48351	30.7	VA1T	32	-20.4	42.3	54	-11.7	-	-	223	375	V
4	2.5502	31.01	VA1T	32.2	-20.3	42.91	54	-11.09	-	-	223	375	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration




# HARMONICS AND SPURIOUS EMISSIONS

## 0 CHANNEL RESULTS

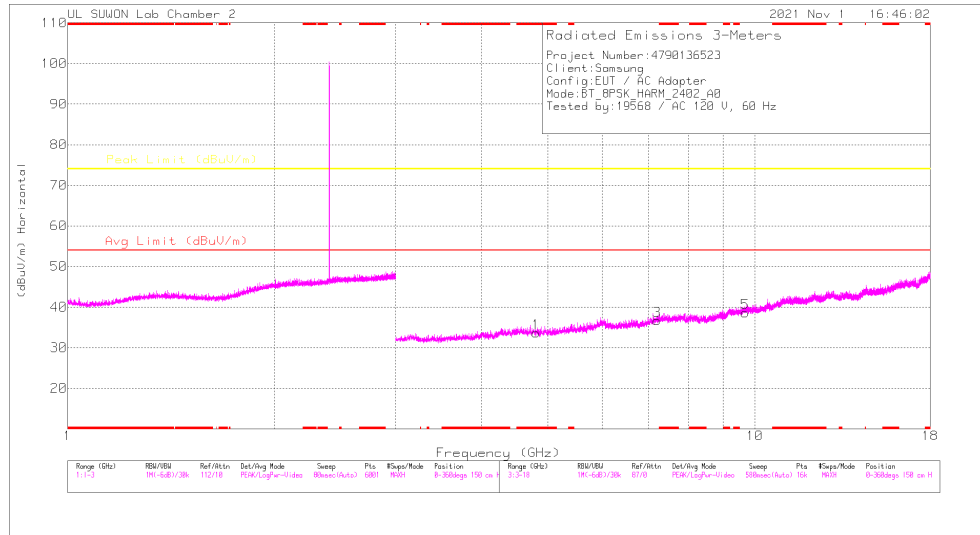

## HORIZONTAL

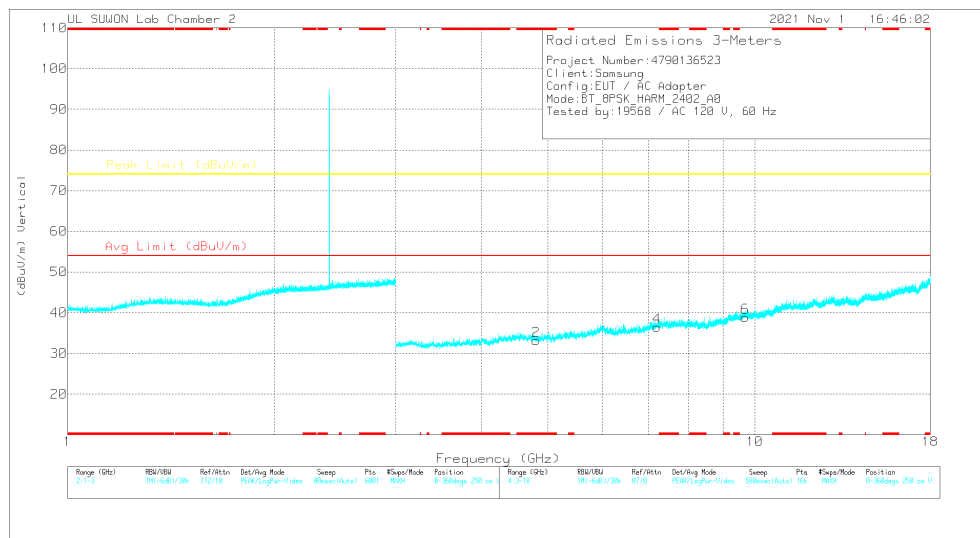


## VERTICAL

## RADIATED EMISSIONS


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0016872 4	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.80137	35.47	PKFH	34.1	-27.9	0	41.67	-	-	74	-32.33	360	100	H
* 4.81459	35.47	PKFH	34.1	-28	0	41.57	-	-	74	-32.43	360	100	V
7.19985	34.18	PKFH	36.2	-25.3	0	45.08	-	-	74	-28.92	360	100	H
7.19987	33.87	PKFH	36.2	-25.3	0	44.77	-	-	74	-29.23	360	100	V
9.67396	31.08	PKFH	37.1	-21.3	0	46.88	-	-	74	-27.12	360	100	H
9.67161	31.79	PKFH	37.1	-21.3	0	47.59	-	-	74	-26.41	360	100	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PKFH FHSS/BT RB=100k for Frequencies<1GHz / RB=1MHz for Frequencies>1GHz, VB=3 x RB, Peak

### 39 CHANNEL RESULTS

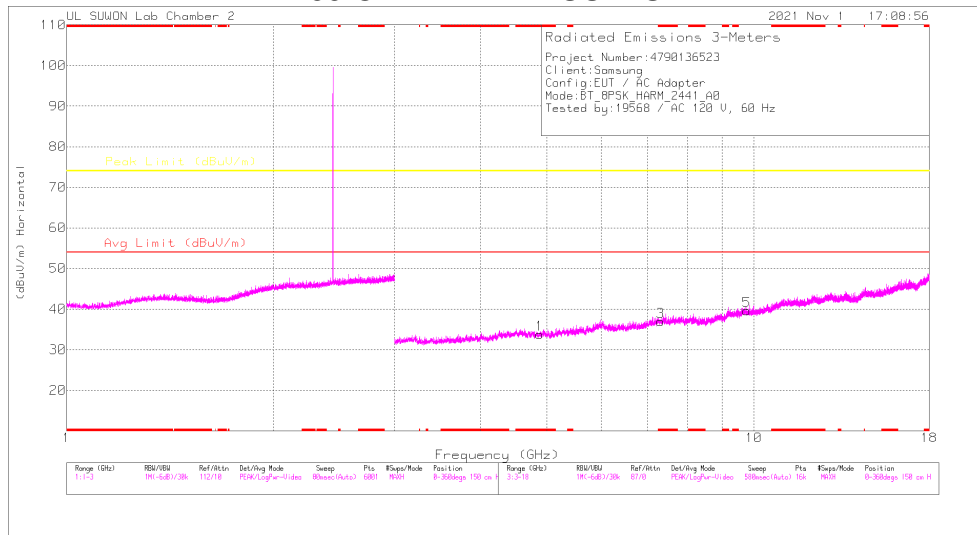

### HORIZONTAL

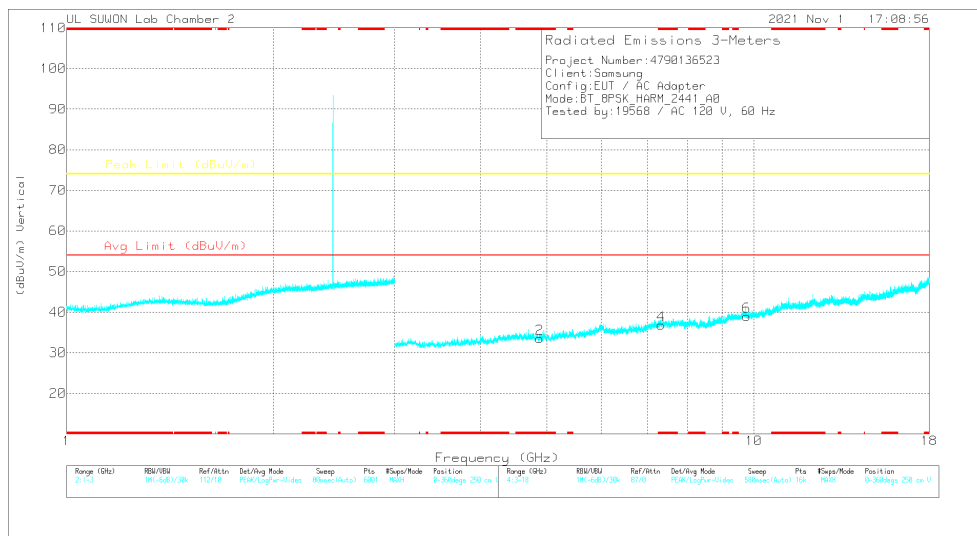


### VERTICAL

### RADIATED EMISSIONS


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0016872_4	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.87986	35.59	PKFH	34.1	-27.8	0	41.89	-	-	74	-32.11	360	100	H
* 4.88463	35.2	PKFH	34.1	-27.8	0	41.5	-	-	74	-32.5	360	100	V
* 7.31489	34.67	PKFH	36.1	-24.9	0	45.87	-	-	74	-28.13	360	100	H
* 7.33368	34.94	PKFH	36.1	-24.8	0	46.24	-	-	74	-27.76	360	100	V
9.75984	31.05	PKFH	37.2	-21.5	0	46.75	-	-	74	-27.25	360	100	H
9.76707	30.96	PKFH	37.2	-21.5	0	46.66	-	-	74	-27.34	360	100	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PKFH FHSS/BT RB=100k for Frequencies<1GHz / RB=1MHz for Frequencies>1GHz, VB=3 x RB, Peak

### 78 CHANNEL RESULTS

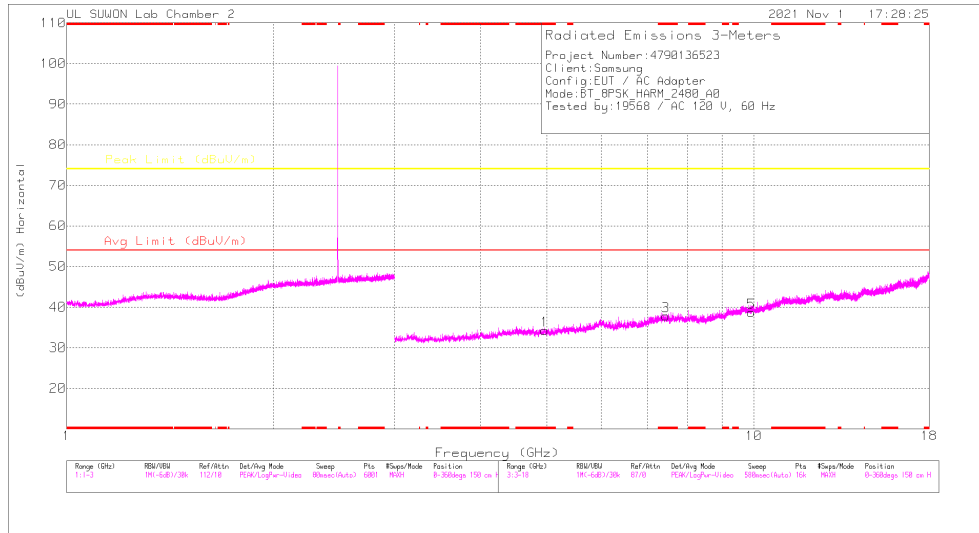

### HORIZONTAL

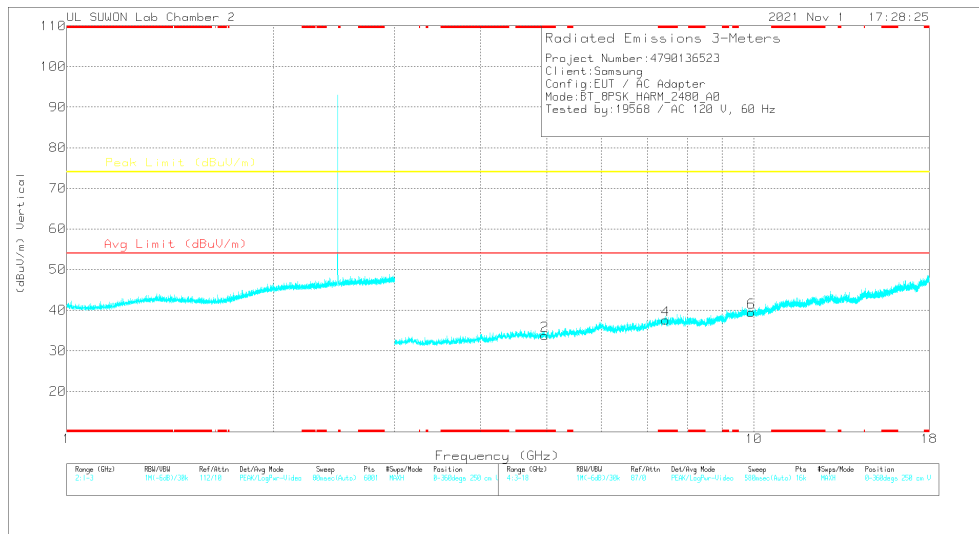


### VERTICAL

### RADIATED EMISSIONS


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0016872_4	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.96854	35.6	PKFH	34.1	-27.2	0	42.5	-	-	74	-31.5	360	100	H
* 4.96139	34.6	PKFH	34.1	-27.2	0	41.5	-	-	74	-32.5	360	100	V
* 7.44211	34.06	PKFH	36	-24.1	0	45.96	-	-	74	-28.04	360	100	H
* 7.43732	33.43	PKFH	36	-24.1	0	45.33	-	-	74	-28.67	360	100	V
9.91421	30.72	PKFH	37.4	-21.3	0	46.82	-	-	74	-27.18	360	100	H
9.91995	30.96	PKFH	37.4	-21.2	0	47.16	-	-	74	-26.84	360	100	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PKFH FHSS/BT RB=100k for Frequencies<1GHz / RB=1MHz for Frequencies>1GHz, VB=3 x RB, Peak

## 10.2. WORST CASE BELOW 1 GHZ SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

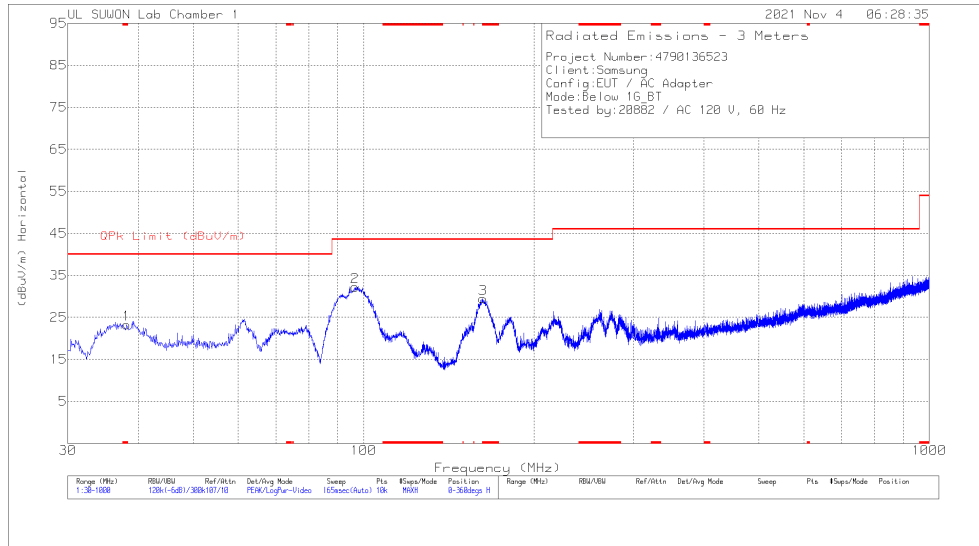

**HORIZONTAL**

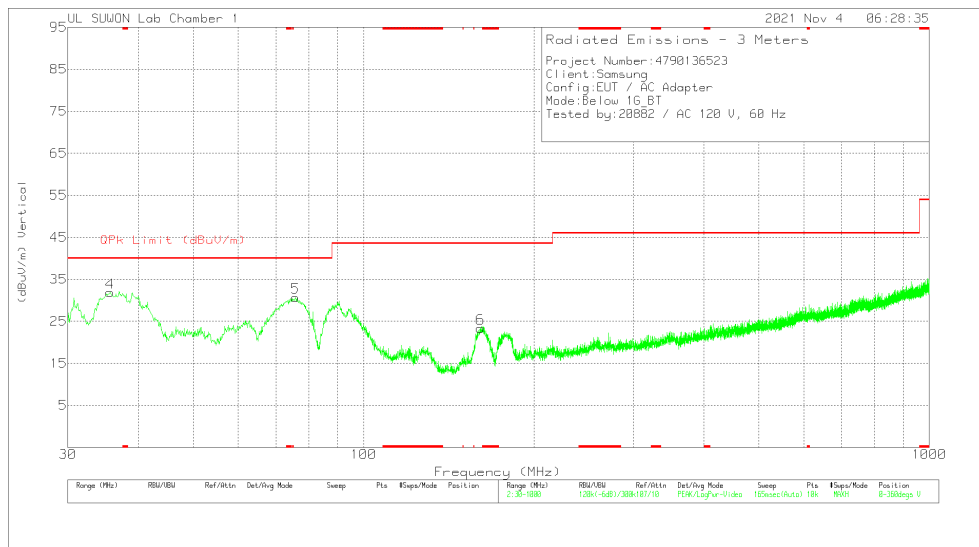

**VERTICAL**

### Below 1GHz Data

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163_750	Below_1G[dB]	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 38.148	36.27	Pk	18	-31	23.27	40	-16.73	0-360	100	H
2	96.542	45.41	Pk	17	-30.2	32.21	43.52	-11.31	0-360	200	H
3	* 162.599	44.54	Pk	14.4	-29.5	29.44	43.52	-14.08	0-360	100	H
4	35.626	46.18	Pk	16.9	-31.2	31.88	40	-8.12	0-360	200	V
5	75.784	48.02	Pk	13.2	-30.5	30.72	40	-9.28	0-360	200	V
6	160.95	38.67	Pk	14.3	-29.6	23.37	43.52	-20.15	0-360	300	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector

## 11. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

### RESULTS

### 11.1.1. AC Power Line

#### LINE 1 RESULTS

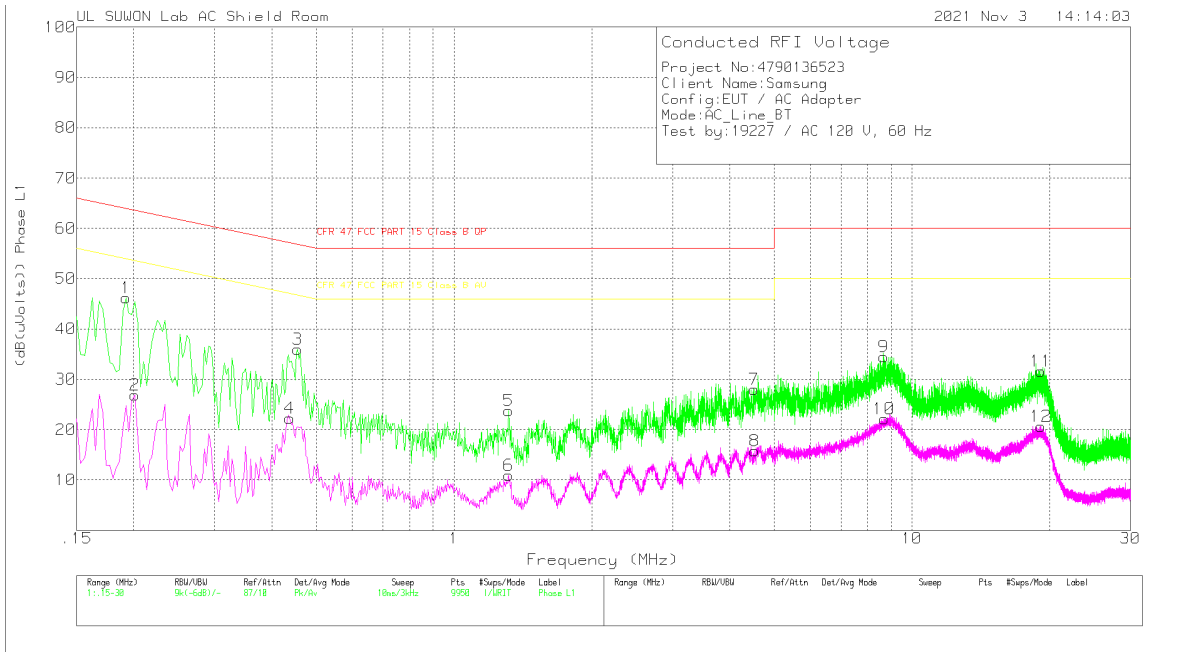

#### Trace Markers


Range 1: Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_Wit h EX_L1[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
1	.192	36.1	Pk	9.9	.2	46.2	63.95	-17.75	-	-
2	.201	16.87	Av	9.8	.2	26.87	-	-	53.57	-26.7
3	.456	25.89	Pk	9.9	.2	35.99	56.77	-20.78	-	-
4	.438	12.31	Av	9.8	.2	22.31	-	-	47.1	-24.79
5	1.317	13.72	Pk	9.7	.3	23.72	56	-32.28	-	-
6	1.317	.95	Av	9.7	.3	10.95	-	-	46	-35.05
7	4.521	17.95	Pk	9.7	.3	27.95	56	-28.05	-	-
8	4.53	5.77	Av	9.7	.3	15.77	-	-	46	-30.23
9	8.67	24.28	Pk	9.8	.4	34.48	60	-25.52	-	-
10	8.691	11.98	Av	9.8	.4	22.18	-	-	50	-27.82
11	19.125	21.08	Pk	10.1	.4	31.58	60	-28.42	-	-
12	19.116	10.15	Av	10.1	.4	20.65	-	-	50	-29.35

Pk - Peak detector

Av - Average detection

### LINE 2 RESULTS

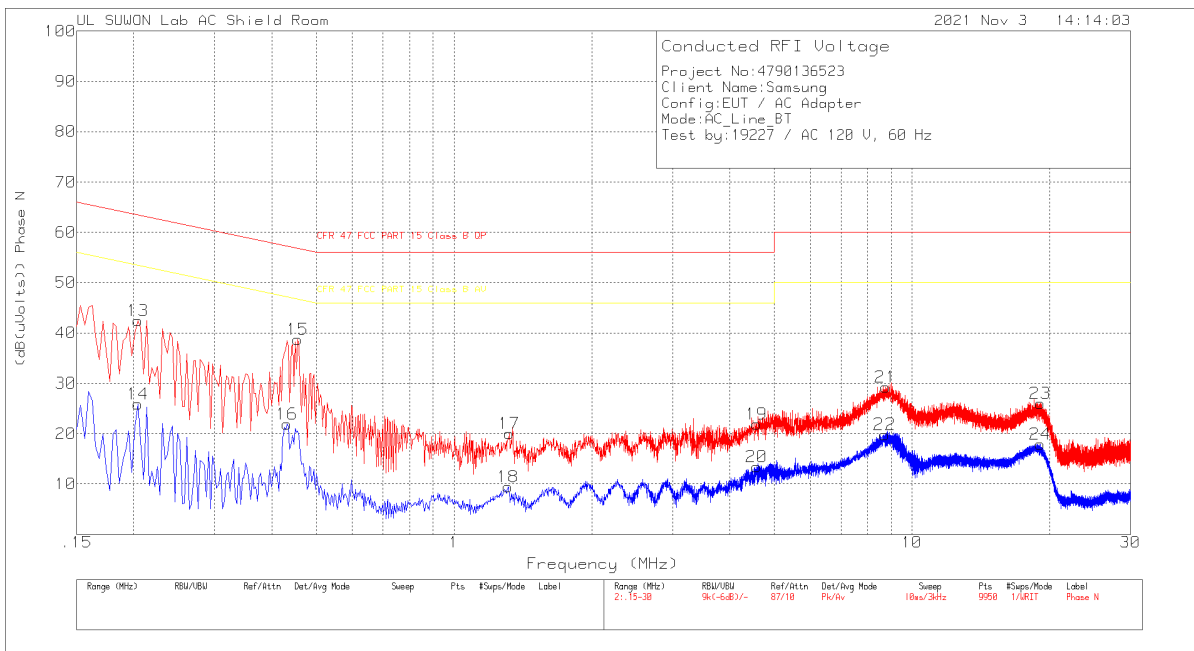

#### Trace Markers

##### Range 2: Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_Wit h EX_N[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
13	.204	32.45	Pk	9.8	.2	42.45	63.45	-21	-	-
14	.204	15.93	Av	9.8	.2	25.93	-	-	53.45	-27.52
15	.456	28.63	Pk	9.9	.2	38.73	56.77	-18.04	-	-
16	.432	11.87	Av	9.8	.2	21.87	-	-	47.21	-25.34
17	1.32	10.05	Pk	9.7	.3	20.05	56	-35.95	-	-
18	1.314	-.55	Av	9.7	.3	9.45	-	-	46	-36.55
19	4.578	11.93	Pk	9.7	.3	21.93	56	-34.07	-	-
20	4.584	3.43	Av	9.7	.3	13.43	-	-	46	-32.57
21	8.748	19.04	Pk	9.8	.4	29.24	60	-30.76	-	-
22	8.718	9.63	Av	9.8	.4	19.83	-	-	50	-30.17
23	19.047	15.41	Pk	10.2	.4	26.01	60	-33.99	-	-
24	19.065	7.3	Av	10.2	.4	17.9	-	-	50	-32.1

Pk - Peak detector  
 Av - Average detection

## END OF TEST REPORT