



# CERTIFICATION TEST REPORT

**Report Number.** : 4789354110-E4V2

**Applicant** : SAMSUNG ELECTRONICS CO., LTD.  
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,  
GYEONGGI-DO, 16677, KOREA

**Model** : SM-P610

**FCC ID** : A3LSMP610  
**IC** : 649E-SMP610

**EUT Description** : DTS/UNII a/b/g/n/ac Tablet + BT/BLE and ANT+

**Test Standard(s)** : FCC 47 CFR PART 15 SUBPART E  
INDUSTRY CANADA RSS-247 Issue 2  
INDUSTRY CANADA RSS-GEN Issue 5

**Date Of Issue:**  
March 23, 2020

**Prepared by:**  
UL Korea, Ltd.  
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory  
218 Maeyeong-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16675, Korea  
TEL: (031) 337-9902  
FAX: (031) 213-5433



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	03/19/20	Initial issue	Hyunsik Yun
V2	03/23/20	Updated to address TCB's question	Hyunsik Yun

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>5</b>
<b>2. TEST METHODOLOGY .....</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>6</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>6</i>
4.2. <i>SAMPLE CALCULATION .....</i>	<i>6</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>7</i>
4.4. <i>DECISION RULE.....</i>	<i>7</i>
<b>5. EQUIPMENT UNDER TEST.....</b>	<b>8</b>
5.1. <i>DESCRIPTION OF EUT .....</i>	<i>8</i>
5.2. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	<i>9</i>
5.3. <i>List of test reduction and modes covering other modes: .....</i>	<i>9</i>
5.4. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>11</i>
5.5. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>12</i>
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>14</b>
<b>7. SUMMARY TABLE .....</b>	<b>15</b>
<b>8. MEASUREMENT METHODS .....</b>	<b>16</b>
<b>9. REFERENCE MEASUREMENTS RESULTS .....</b>	<b>17</b>
9.1. <i>ON TIME AND DUTY CYCLE RESULTS.....</i>	<i>17</i>
9.2. <i>DUTY CYCLE PLOTS .....</i>	<i>17</i>
<b>10. ANTENNA PORT TEST RESULTS.....</b>	<b>19</b>
10.1. <i>26 dB &amp; 99% BANDWIDTH.....</i>	<i>19</i>
10.1.1. <i>26 dB &amp; 99% BANDWIDTH TEST RESULTS .....</i>	<i>20</i>
10.1.2. <i>26 dB BANDWIDTH PLOTS .....</i>	<i>22</i>
10.1.3. <i>99% BANDWIDTH PLOTS .....</i>	<i>34</i>
10.2. <i>6 dB &amp; 99% BANDWIDTH.....</i>	<i>48</i>
10.2.1. <i>6 dB &amp; 99% BANDWIDTH TEST RESULTS .....</i>	<i>48</i>
10.2.2. <i>6 dB BANDWIDTH TEST PLOTS .....</i>	<i>49</i>
10.2.3. <i>99% BANDWIDTH TEST PLOTS .....</i>	<i>52</i>
10.3. <i>OUTPUT POWER AND PPSD.....</i>	<i>55</i>
<b>11. TRANSMITTER ABOVE 1 GHz.....</b>	<b>87</b>
11.1. <i>5.2 GHz.....</i>	<i>90</i>

11.1.1.	TX ABOVE 1GHz 802.11a 2Tx MODE IN THE 5.2GHz BAND .....	90
11.1.2.	TX ABOVE 1GHz 802.11n HT20 2Tx MODE IN THE 5.2GHz BAND .....	98
11.1.3.	TX ABOVE 1GHz 802.11n HT40 2Tx MODE IN THE 5.2GHz BAND .....	106
11.1.4.	TX ABOVE 1GHz 802.11ac VHT80 2Tx MODE IN THE 5.2GHz BAND .....	112
11.2.	5.3 GHz.....	116
11.2.1.	TX ABOVE 1 GHz 802.11a 2Tx MODE IN THE 5.3 GHz BAND .....	116
11.2.2.	TX ABOVE 1GHz 802.11n HT20 2Tx MODE IN THE 5.3GHz BAND .....	124
11.2.3.	TX ABOVE 1GHz 802.11n HT40 2Tx MODE IN THE 5.3GHz BAND .....	132
11.2.4.	TX ABOVE 1GHz 802.11ac VHT80 2Tx MODE IN THE 5.3GHz BAND .....	138
11.3.	5.5-5.6 GHz.....	142
11.3.1.	TX ABOVE 1 GHz 802.11a 2Tx MODE IN THE 5.5 GHz BAND .....	142
11.3.2.	TX ABOVE 1GHz 802.11n HT20 2Tx MODE IN THE 5.5GHz BAND .....	152
11.3.3.	TX ABOVE 1GHz 802.11n HT40 2Tx MODE IN THE 5.5GHz BAND .....	162
11.3.4.	TX ABOVE 1GHz 802.11ac VHT80 2Tx MODE IN THE 5.5GHz BAND .....	172
11.4.	5.8 GHz.....	180
11.4.1.	TX ABOVE 1GHz 802.11a 2Tx MODE IN THE 5.8GHz BAND .....	180
11.4.2.	TX ABOVE 1GHz 802.11n HT20 2Tx MODE IN THE 5.8GHz BAND .....	190
11.4.3.	TX ABOVE 1GHz 802.11n HT40 2Tx MODE IN THE 5.8GHz BAND .....	200
11.4.4.	TX ABOVE 1GHz 802.11ac VHT80 2Tx MODE IN THE 5.8GHz BAND .....	208
<b>12.</b>	<b>WORST-CASE BELOW 1 GHz .....</b>	<b>214</b>
<b>13.</b>	<b>AC POWER LINE CONDUCTED EMISSIONS .....</b>	<b>216</b>
<b>14.</b>	<b>DYNAMIC FREQUENCY SELECTION.....</b>	<b>219</b>
14.1.	OVERVIEW.....	219
14.1.1.	LIMITS .....	219
14.1.2.	TEST AND MEASUREMENT SYSTEM .....	223
14.1.3.	SETUP OF EUT .....	226
14.1.4.	DESCRIPTION OF EUT .....	227
14.2.	RESULTS FOR 80 MHz BANDWIDTH(5290 MHz) .....	228
14.2.1.	TEST CHANNEL .....	228
14.2.2.	RADAR WAVEFORM AND TRAFFIC .....	228
14.2.3.	OVERLAPPING CHANNEL TESTS .....	230
14.2.4.	MOVE AND CLOSING TIME .....	230
14.3.	RESULTS FOR 80 MHz BANDWIDTH(5530 MHz) .....	233
14.3.1.	TEST CHANNEL .....	233
14.3.2.	RADAR WAVEFORM AND TRAFFIC .....	233
14.3.3.	OVERLAPPING CHANNEL TESTS .....	235
14.3.4.	MOVE AND CLOSING TIME .....	235

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SAMSUNG ELECTRONICS CO., LTD.  
**EUT DESCRIPTION:** DTS/UNII a/b/g/n/ac Tablet + BT/BLE and ANT+  
**MODEL NUMBER:** SM-P610  
**SERIAL NUMBER:** R52N10VDXDW (CONDUCTED);  
R52N10VEG2H, R52N10VEFRV (RADIATED)  
**DATE TESTED:** MAR 02, 2020 – MAR 19, 2020

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass
INDUSTRY CANADA RSS-247 Issue 2	Pass
INDUSTRY CANADA RSS-GEN Issue 5	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Korea, Ltd. By:



Junwhan Lee  
Suwon Lab Engineer  
UL Korea, Ltd.

Tested By:



Hyunsik Yun  
Suwon Lab Engineer  
UL Korea, Ltd.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. IC RSS-GEN Issue 5.
4. IC RSS-247 Issue 2.
5. KDB 789033 D02 General UNII Test Procedures New Rules v02r01
6. KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
7. KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02
8. KDB 662911 D01 Multiple Transmitter Output v02r01
9. ANSI C63.10-2013.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro
<input checked="" type="checkbox"/> Chamber 1
<input checked="" type="checkbox"/> Chamber 2
<input checked="" type="checkbox"/> Chamber 3

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/wp-content/uploads/2017/05/TL-637.pdf>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 28.9 \text{ dBuV/m} &= 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.35 dB
Radiated Disturbance, 30 MHz to 1 GHz	3.49 dB
Radiated Disturbance, 1 GHz to 18 GHz	5.82 dB
Radiated Disturbance, 18 GHz to 40 GHz	5.49 dB

Uncertainty figures are valid to a confidence level of 95%.

### 4.4. DECISION RULE

Decision rule for statement(s) of conformity is based on Procedure 1, Clause 4.4.2 in IEC Guide 115:2007.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

DTS/UNII a/b/g/n/ac Tablet + BT/BLE and ANT+. This test report addresses the NII (UNII 802.11a/n/ac) operational mode.

#### WiFi operating mode

Frequency range	Mode	ANT1	ANT2
5GHz (5180 MHz ~ 5825 MHz)	802.11a SISO	TX/RX	TX/RX
	802.11a MIMO	TX/RX	TX/RX
	802.11n SISO	TX/RX	TX/RX
	802.11n MIMO	TX/RX	TX/RX
	802.11ac SISO	TX/RX	TX/RX
	802.11ac MIMO	TX/RX	TX/RX

#### MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

Frequency Range [MHz]	Mode	Output Power [dBm]		Output Power [mW]	
		ANT1	ANT2	ANT1	ANT2
5180 - 5240	802.11a MIMO	14.05		25.41	
	802.11n(HT20) MIMO	14.32		27.04	
5190 - 5230	802.11n(HT40) MIMO	10.09		10.21	
5210	802.11ac(VHT80) SISO	9.36		8.63	
5260 - 5320	802.11a MIMO	14.09		25.64	
	802.11n(HT20) MIMO	14.06		25.47	
5270 - 5310	802.11n(HT40) MIMO	10.37		10.89	
5290	802.11ac(VHT80) SISO	9.25		8.41	
5500 - 5720	802.11a MIMO	14.24		26.55	
	802.11n(HT20) MIMO	14.51		28.25	
5510 - 5710	802.11n(HT40) MIMO	10.55		11.35	
5530 - 5690	802.11ac(VHT80) SISO	9.34		8.59	
5745 - 5825	802.11a MIMO	14.31		26.98	
	802.11n(HT20) MIMO	14.49		28.12	
5755 - 5795	802.11n(HT40) MIMO	10.52		11.27	
5775	802.11ac(VHT80) SISO	9.23		8.38	



## 5.2. DESCRIPTION OF AVAILABLE ANTENNAS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The internal antenna was Permanently attached.  
 Therefore this E.U.T Complies with the requirement of §15.203.**

The radio utilizes a internal antenna, with a maximum gain of:

Frequency Band [MHz]	ANT1 Gain [dBi]	ANT2 Gain [dBi]	Correlated Chains Directional Gain [dBi]
UNII 1 5150 - 5250	-5.80	-8.80	-4.16
UNII 2A 5250 - 5350	-6.00	-8.40	-4.11
UNII 2C 5470 - 5725	-6.30	-8.10	-4.14
UNII 3 5725 - 5850	-6.80	-7.00	-3.89

## 5.3. List of test reduction and modes covering other modes:

The output power on covered modes is equal to or less than one referenced.

### UNII 1

5150 – 5250 MHz RESTRICTED Frequency Band (Radiated Testing)	
Frequency Range [MHz]	Mode
5180 - 5240	802.11a Legacy 1TX / 2TX
5180 - 5240	802.11n HT20 1TX / 2TX
5180 - 5240	802.11ac VHT20 1TX / 2TX
5190 - 5230	802.11n HT40 1TX / 2TX
5190 - 5230	802.11ac VHT40 1TX / 2TX
5210	802.11ac VHT80 1TX / 2TX

**UNII 2A**

<b>5250 – 5350 MHz RESTRICTED Frequency Band (Radiated Testing)</b>	
<b>Frequency Range [MHz]</b>	<b>Mode</b>
5260 - 5320	802.11a Legacy 1TX / 2TX
5260 - 5320	802.11n HT20 1TX / 2TX
5260 - 5320	802.11ac VHT20 1TX / 2TX
5270 - 5310	802.11n HT40 1TX / 2TX
5270 - 5310	802.11ac VHT40 1TX / 2TX
5290	802.11ac VHT80 1TX / 2TX

**UNII 2C**

<b>5470 – 5725 MHz RESTRICTED Frequency Band (Radiated Testing)</b>	
<b>Frequency Range [MHz]</b>	<b>Mode</b>
5500 - 5720	802.11a Legacy 1TX / 2TX
5500 - 5720	802.11n HT20 1TX / 2TX
5500 - 5720	802.11ac VHT20 1TX / 2TX
5510 - 5710	802.11n HT40 1TX / 2TX
5510 - 5710	802.11ac VHT40 1TX / 2TX
5530 - 5690	802.11ac VHT80 1TX / 2TX

**UNII 3**

<b>5725 – 5850 MHz RESTRICTED Frequency Band (Radiated Testing)</b>	
<b>Frequency Range [MHz]</b>	<b>Mode</b>
5745 - 5825	802.11a Legacy 1TX / 2TX
5745 - 5825	802.11n HT20 1TX / 2TX
5745 - 5825	802.11ac VHT20 1TX / 2TX
5755 - 5795	802.11n HT40 1TX / 2TX
5755 - 5795	802.11ac VHT40 1TX / 2TX
5775	802.11ac VHT80 1TX / 2TX

## 5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

For SISO (ANT1), the fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.

For SISO (ANT2), the fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

For MIMO, the fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.

Based on the baseline scan, the worst-case data rates were:

802.11a mode: 6 Mbps 1Tx  
802.11a mode: 6 Mbps 2Tx  
802.11n HT20 mode: MCS0 1Tx  
802.11n HT20 mode: MCS0 2Tx  
802.11n HT40 mode: MCS0 1Tx  
802.11n HT40 mode: MCS0 2Tx  
802.11ac VHT80 mode: MCS0 1Tx  
802.11ac VHT80 mode: MCS0 2Tx

Radiation Restricted Bandedge test for 802.11a / n HT20 & HT40 / ac VHT80 were evaluated at SISO (ANT1) mode, SISO(ANT2), and MIMO(ANT ALL) mode.

Depending on Output Power and Radiation spot-check results for 802.11a / n HT20 & HT40 / ac VHT80, and Radiation Test for MIMO (ANT ALL) mode is worst case than SISO(ANT1) mode and SISO (ANT2). So, radiated test for 802. 11a / n HT20 & HT40 / ac VHT80 were evaluated at MIMO (ANT ALL) mode.

Note : All radiated and power line conducted tests were performed connected with charger for evaluation of worst case mode.

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA50EWE	R37N19P1472HM3	N/A
Data Cable	SAMSUNG	EP-DR140AWE	N/A	N/A
Earphone	SAMSUNG	EHS64AVFWE	N/A	N/A


### I/O CABLE

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0m	N/A
2	Audio	2	Mini-Jack	Unshielded	1.2m	N/A


### TEST SETUP

The EUT is a stand-alone unit during the tests.  
Test software in hidden menu exercised the EUT to enable NII mode.

**SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)**

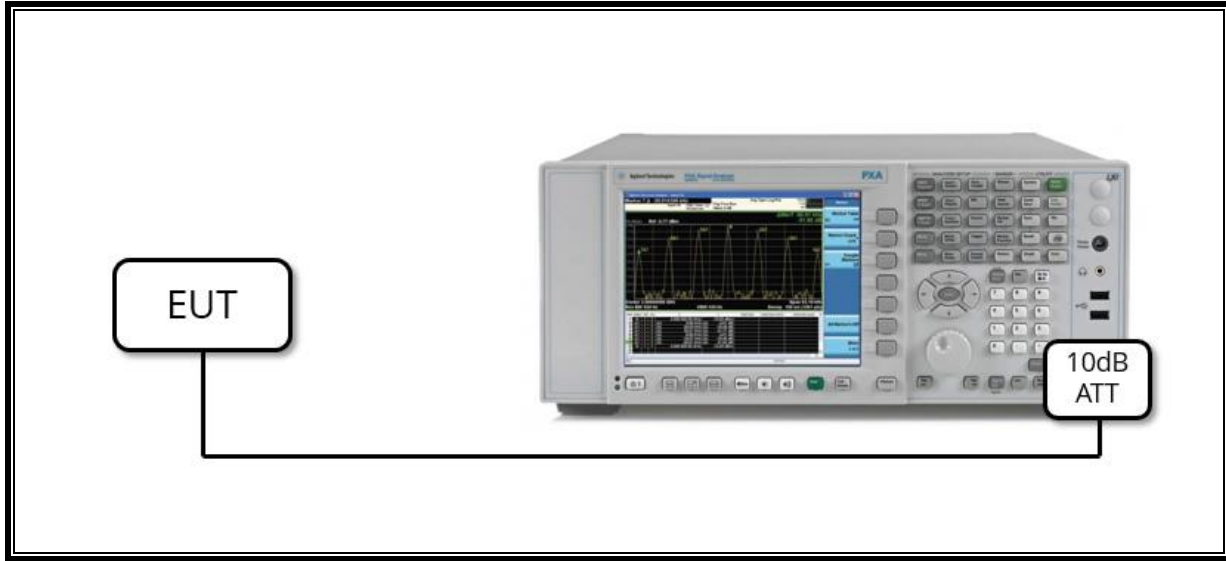

**SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)**

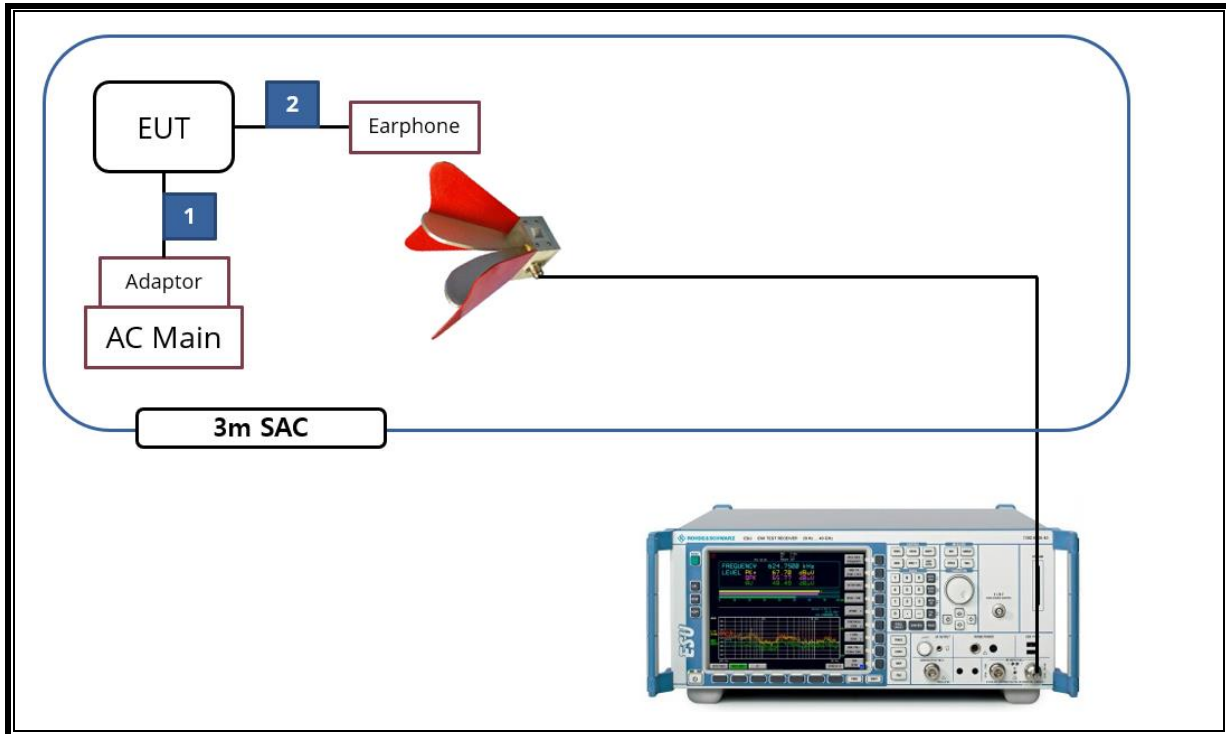

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	08-04-20
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	08-04-20
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	08-04-20
Antenna, Horn, 18 GHz	ETS	3115	00167211	08-04-20
Antenna, Horn, 18 GHz	ETS	3115	00161451	08-04-20
Antenna, Horn, 18 GHz	ETS	3117	00168724	08-04-20
Antenna, Horn, 18 GHz	ETS	3117	00168717	08-04-20
Antenna, Horn, 18 GHz	ETS	3117	00205959	08-04-20
Antenna, Horn, 40 GHz	ETS	3116C	00166155	08-14-20
Antenna, Horn, 40 GHz	ETS	3116C	00168645	10-02-21
Preamplifier	ETS	3116C-PA	00168841	08-08-20
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-05-20
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-05-20
Preamplifier, 1000 MHz	Sonoma	310N	370599	08-05-20
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-06-20
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-06-20
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	08-06-20
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-06-20
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-06-20
Spectrum Analyzer, 43.5 GHz	R&S	FSW43	104089	08-06-20
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-09-20
Attenuator	PASTERNAK	PE7087-10	A001	08-08-20
Attenuator	PASTERNAK	PE7087-10	A008	08-08-20
Attenuator	PASTERNAK	PE7004-10	2	08-06-20
Attenuator	PASTERNAK	PE7087-10	A009	08-08-20
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-06-20
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-06-20
EMI Test Receive, 44 GHz	R&S	ESW44	101590	08-05-20
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-05-20
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	08-06-20
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	08-06-20
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	020	08-06-20
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	08-06-20
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	08-06-20
High Pass Filter 3GHz	Micro-Tronics	HPM17543	020	08-06-20
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	08-06-20
High Pass Filter 6GHz	Micro-Tronics	HPS17542	016	08-06-20
High Pass Filter 6GHz	Micro-Tronics	HPS17542	021	08-06-20
LISN	R&S	ENV-216	101837	08-09-20
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	10-02-21
Termination	WEINSCHEL	M1406A	T01	08-08-20
Attenuator	WEINSCHEL	WA76-30-21	A015	08-08-20
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

## 7. SUMMARY TABLE

FCC Part Section	RSS Section	Test Description	Test Limit	Test Condition	Test Result
15.407(e)	RSS-247 6.2.4.1	6dB Band width (5.8Ghz)	500KHz	Condcuted	PASS
15.407 (a)(2)	RSS-247 6.2.1.1 6.2.2.1 6.2.3.1	TX Cond. Power 5.15-2.25, 5.25-5.35 & 5.47-5.725	<24dBm or 11+10Log(OBW)		PASS
15.407 (a)(3)	RSS-247 6.2.4.1	TX Cond. Power 5.725-5.825	< 30dBm or 17+10Log(OBW)		PASS
15.407 (a)(5)	RSS-247 6.2.1.1 6.2.2.1 6.2.3.1	PSD (5.2,5.3,5.5GHz)	<11dBm		PASS
15.407 (a)(5)	RSS-247 6.2.4.1	PSD (5.8GHz)	30dBm per 500kHz		PASS
15.207 (a)	RSS-GEN Clause 8.8	AC Power Line conducted emissions	Section 10	Radiated	PASS
15.407 (b) & 15.209	RSS-GEN Clause 7 & 8.9	Radiated Spurious Emission	< 54dBuV/m		PASS
15.407 (h)(2)	RSS-247 6.3	Dynamic Frequency Selection	N/A	Condcuted	PASS

## 8. MEASUREMENT METHODS

On-Time and Duty Cycle : KDB 789033 D02 v02r01, Section II.B.

6dB Emission BW : KDB 789033 D02 v02r01, Section II.C.2.

26dB Emission BW : KDB 789033 D02 v02r01, Section II.C.1.

99% Occupied BW : KDB 789033 D02 v02r01, Section II.D.

Conducted Output Power : KDB 789033 D02 v02r01, Section II.E.3.b(Method PM-G)

Conducted Output Power for Straddle Channel (ch144/142/138 for 20/40/80MHz BW):

KDB 789033 D02 v02r01, Section II.E.2.b(Method SA-1)

Power Spectral Density : KDB 789033 D02 v02r01, Section II.F.

Unwanted emissions in restricted bands : KDB 789033 D02 v02r01, Section II.G.3 – II.G.6.

Unwanted emissions in non-restricted bands : KDB 789033 D02 v02r01, Section II.G.3 – II.G.6.

AC Power Line Conducted Emission : ANSI C63.10-2013, Section 6.2.



## 9. REFERENCE MEASUREMENTS RESULTS

### 9.1. ON TIME AND DUTY CYCLE RESULTS

Mode	ANT	ON Time [msec]	Period [msec]	Duty Cycle X [linear]	Duty Cycle [%]	Duty Cycle Correction Factor [dB]
802.11a	Single	2.792	2.893	0.97	96.51	0.15
802.11n HT20		5.115	5.226	0.98	97.88	0.09
802.11n HT40		2.484	2.594	0.96	95.76	0.19
802.11ac VHT80		1.420	1.530	0.93	92.81	0.32
802.11a	ALL	2.792	2.893	0.97	96.51	0.15
802.11n HT20		5.116	5.225	0.98	97.91	0.09
802.11n HT40		2.484	2.603	0.95	95.43	0.20
802.11ac VHT80		1.008	1.127	0.89	89.44	0.48


#### LIMITS


None; for reporting purposes only.

#### PROCEDURE

KDB 789033 D02 v02r01 Zero-Span Spectrum Analyzer Method.

### 9.2. DUTY CYCLE PLOTS

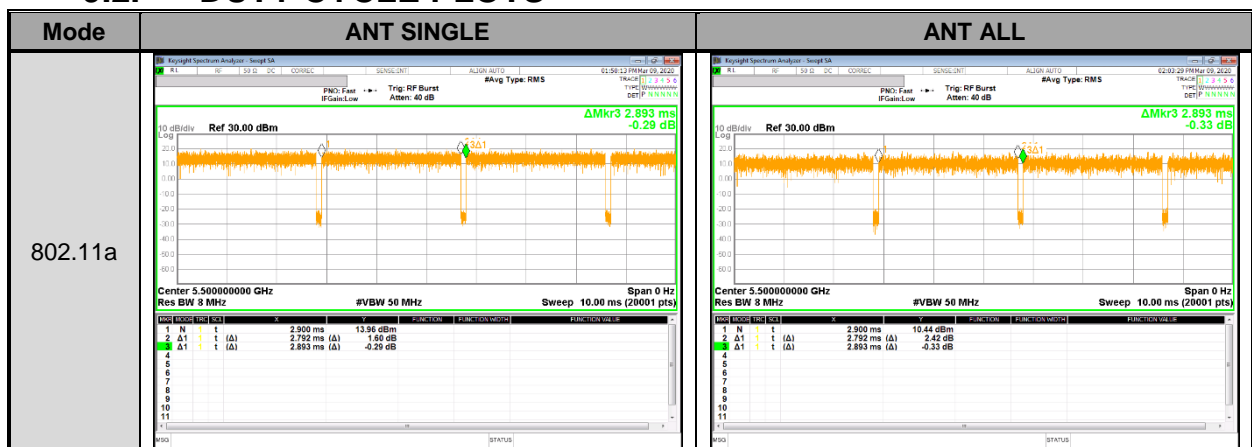

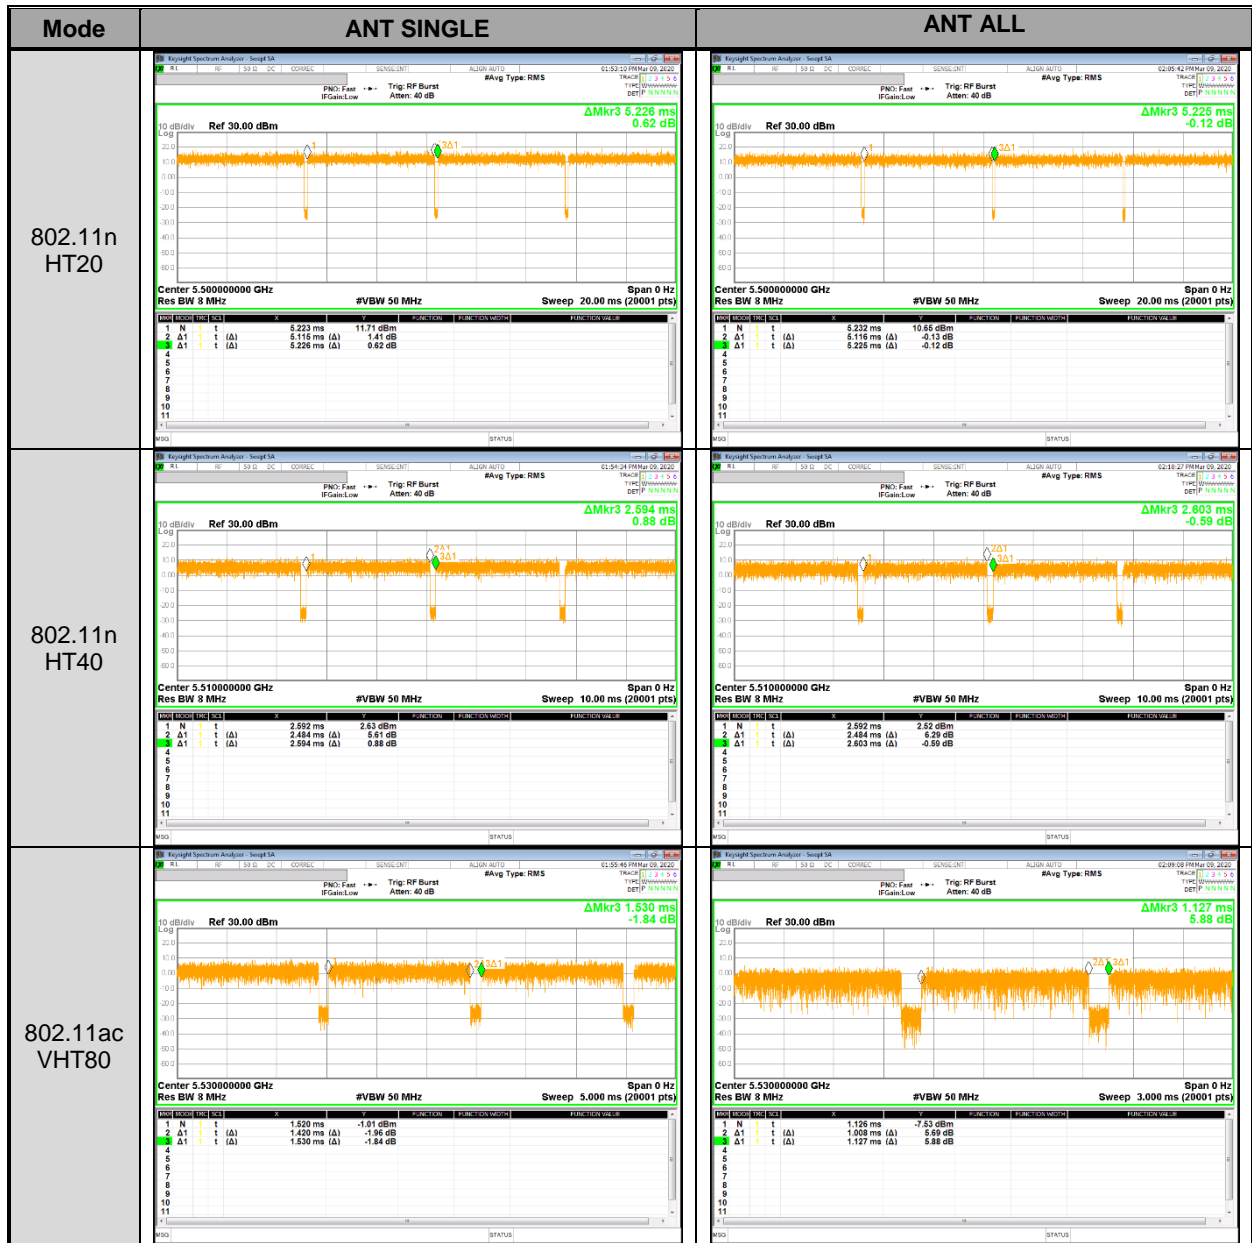

## 10. ANTENNA PORT TEST RESULTS

### 10.1. 26 dB & 99% BANDWIDTH

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

Reference to 789033 D02 General UNII Test Procedures New Rules v02r01: The transmitter output is connected to a spectrum analyzer.

- 26 dB Bandwidth

RBW set to approximately 1% of EBW, the VBW > RBW, peak detector and max hold.

- 99% Bandwidth

RBW: 1 ~ 5% of 99% Bandwidth, VBW >= 3 x RBW, sample detector and clear write.

#### NOTE

- Calculation for 26dB Bandwidth of UNII-2C and UNII-3 Straddle Channel

ex) Fundamental frequency : 5720MHz

- 26dB BW : 20.58MHz
- Turning Frequency : 5725MHz
- 26dB Bandwidth of UNII-2C band Portion  
=  $(5725 - (5720 - (20.58 / 2))) = 15.29$  MHz
- 26dB Bandwidth of UNII-3 band Portion  
=  $(5720 + (20.58 / 2) - 5725) = 5.29$  MHz

**RESULTS**

**10.1.1. 26 dB & 99% BANDWIDTH TEST RESULTS**

**10.1.1.1.ANT1**

Band	Mode	Channel	Center Freq [MHz]	26 dB BW [MHz]	99% BW [MHz]	26 dB BW Worst
UNII-1	802.11a	Low	5180	20.96	16.31	20.45
		Mid	5200	21.03	16.36	
		High	5240	20.45	16.37	
	802.11n HT20	Low	5180	21.14	17.53	21.14
		Mid	5200	24.39	17.58	
		High	5240	22.89	17.52	
	802.11n HT40	Low	5190	41.35	36.24	41.35
		High	5230	42.18	36.32	
	802.11ac VHT80	Mid	5210	81.08	75.05	81.08
UNII-2A	802.11a	Low	5260	20.10	16.36	20.10
		Mid	5300	20.48	16.36	
		High	5320	20.97	16.35	
	802.11n HT20	Low	5260	21.18	17.55	21.18
		Mid	5300	22.04	17.57	
		High	5320	21.22	17.54	
	802.11n HT40	Low	5270	41.59	36.30	41.35
		High	5310	41.35	36.29	
	802.11ac VHT80	Mid	5290	98.78	75.07	98.78
UNII-2C	802.11a	Low	5500	20.24	16.35	19.93
		Mid	5580	19.93	16.36	
		High	5700	19.98	16.31	
	802.11n HT20	Low	5500	20.50	17.55	20.50
		Mid	5580	20.64	17.55	
		High	5700	20.55	17.51	
	802.11n HT40	Low	5510	41.73	36.28	41.73
		Mid	5550	41.95	36.29	
		High	5670	41.78	36.29	
	802.11ac VHT80	Low	5530	81.82	74.97	81.82
		High	5610	88.15	74.95	

Band	Mode	Channel	Center Freq [MHz]	26 dB BW [MHz]		99% BW [MHz]	
				UNII-2C	UNII-3	UNII-2C	UNII-3
Straddle Channel	802.11a	Straddle	5720	14.95	5.38	13.13	3.53
	802.11n HT20	Straddle	5720	15.48	5.47	13.76	4.08
	802.11n HT40	Straddle	5710	35.96	6.15	33.02	3.79
	802.11ac VHT80	Straddle	5690	75.34	6.00	71.86	4.63


**10.1.1.2. ANT2**

Band	Mode	Channel	Center Freq [MHz]	26 dB BW [MHz]	99% BW [MHz]	26 dB BW Worst	
UNII-1	802.11a	Low	5180	20.23	16.36	20.08	
		Mid	5200	20.08	16.37		
		High	5240	20.59	16.38		
	802.11n HT20	Low	5180	23.74	17.55	23.74	
		Mid	5200	24.07	17.54		
		High	5240	23.83	17.56		
	802.11n HT40	Low	5190	41.41	36.27	41.14	
		High	5230	41.14	36.19		
	802.11ac VHT80	Mid	5210	82.28	74.91	82.28	
	UNII-2A	802.11a	Low	5260	22.72	16.37	20.99
			Mid	5300	21.23	16.37	
			High	5320	20.99	16.37	
802.11n HT20		Low	5260	21.72	17.59	21.35	
		Mid	5300	21.35	17.56		
		High	5320	23.43	17.53		
802.11n HT40		Low	5270	42.07	36.25	41.86	
		High	5310	41.86	36.28		
802.11ac VHT80		Mid	5290	81.48	74.93	81.48	
UNII-2C		802.11a	Low	5500	20.62	16.34	20.51
			Mid	5580	20.51	16.33	
			High	5700	20.81	16.31	
	802.11n HT20	Low	5500	21.02	17.55	21.02	
		Mid	5580	21.82	17.53		
		High	5700	21.72	17.56		
	802.11n HT40	Low	5510	41.42	36.27	41.13	
		Mid	5550	41.26	36.25		
		High	5670	41.13	36.27		
	802.11ac VHT80	Low	5530	81.50	74.96	81.50	
		High	5610	81.68	74.87		


Band	Mode	Channel	Center Freq [MHz]	26 dB BW [MHz]		99% BW [MHz]	
				UNII-2C	UNII-3	UNII-2C	UNII-3
Straddle Channel	802.11a	Straddle	5720	15.17	5.15	13.12	3.56
	802.11n HT20	Straddle	5720	15.82	5.61	13.76	4.04
	802.11n HT40	Straddle	5710	35.96	5.68	33.01	3.70
	802.11ac VHT80	Straddle	5690	75.97	5.99	72.02	4.24

### 10.1.2. 26 dB BANDWIDTH PLOTS


#### UNII 5.2 GHz IEEE 802.11a mode

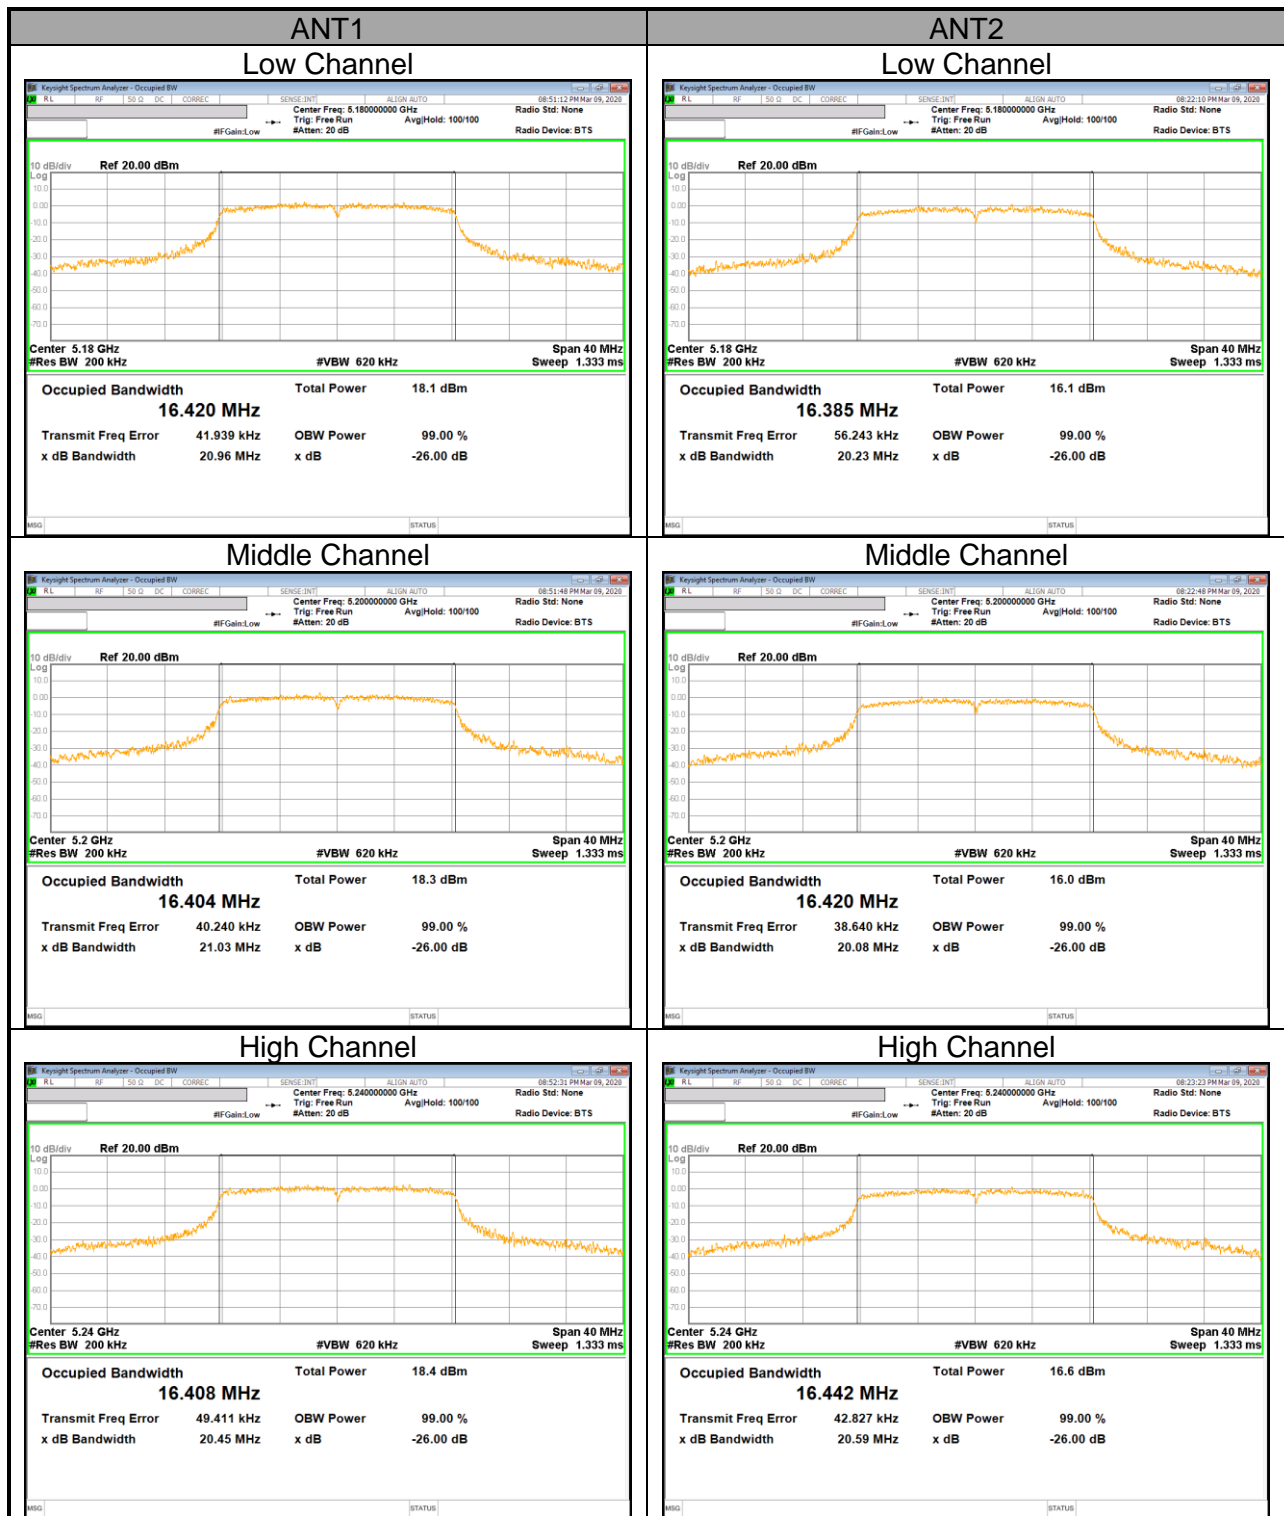


**UNII 5.2 GHz IEEE 802.11n HT20 mode**

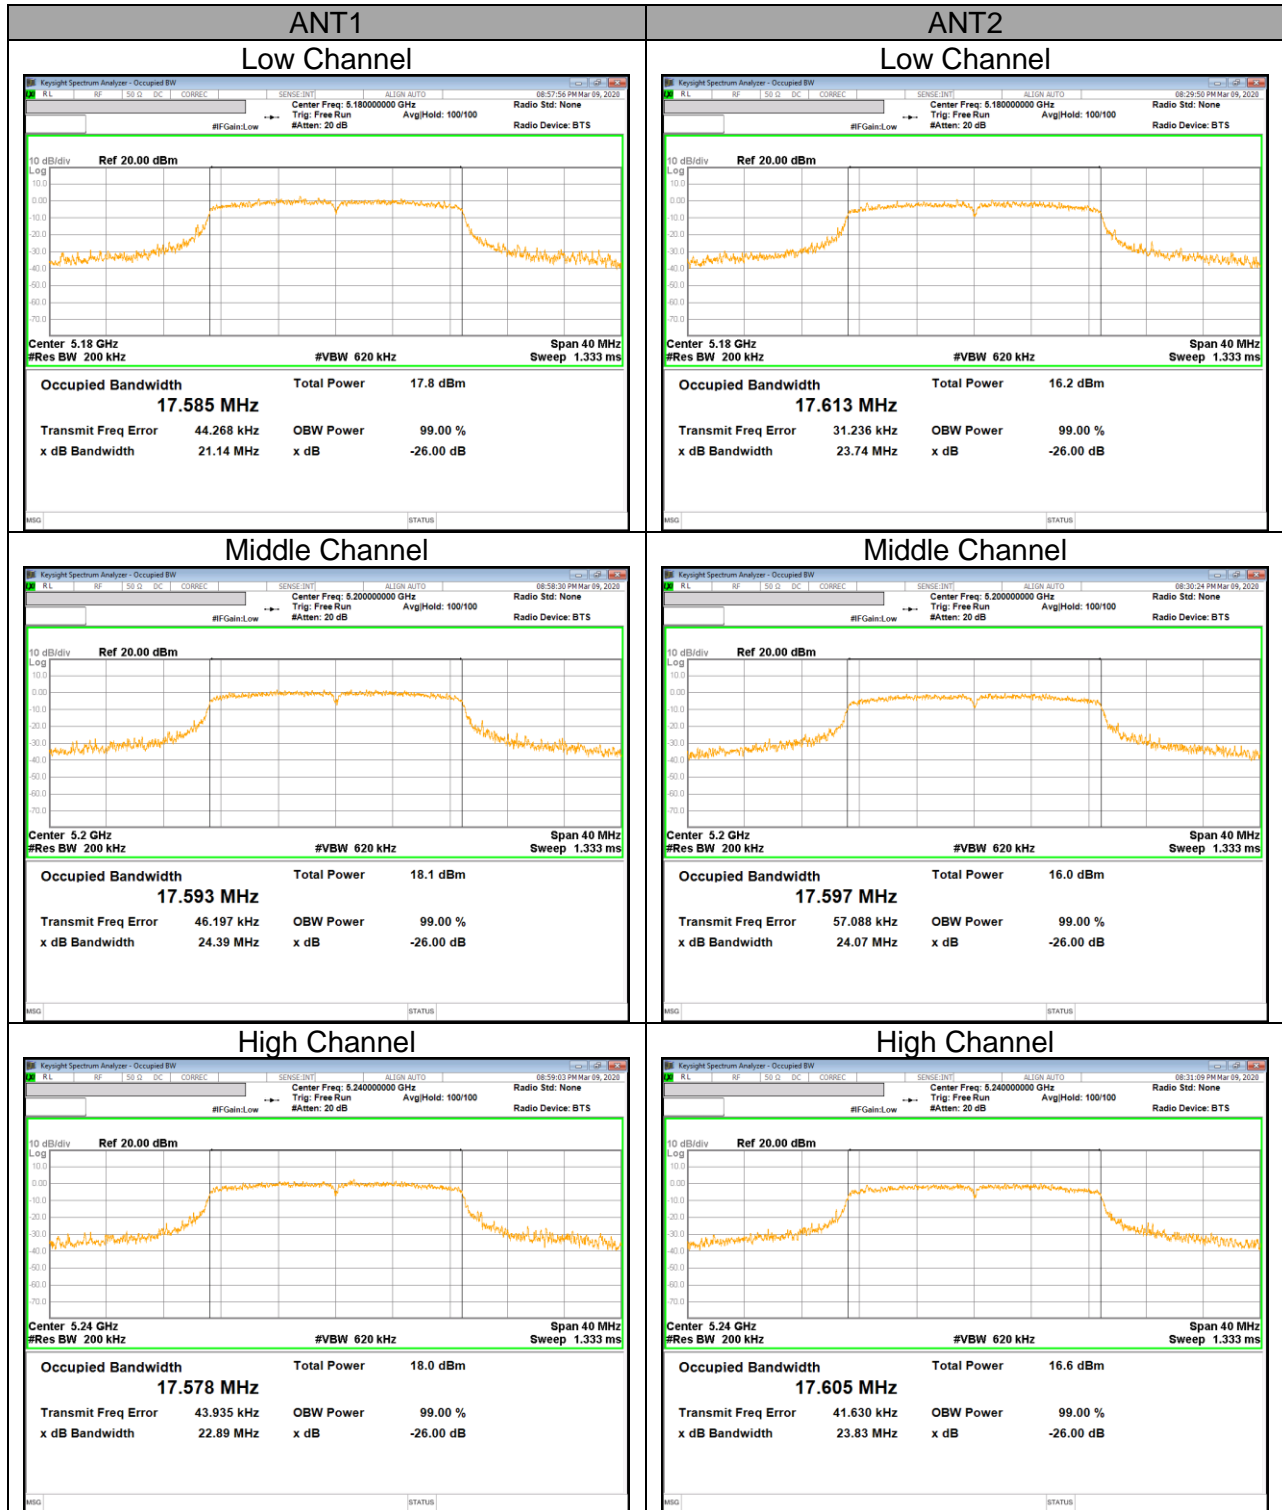

**UNII 5.2 GHz IEEE 802.11n HT40 mode**

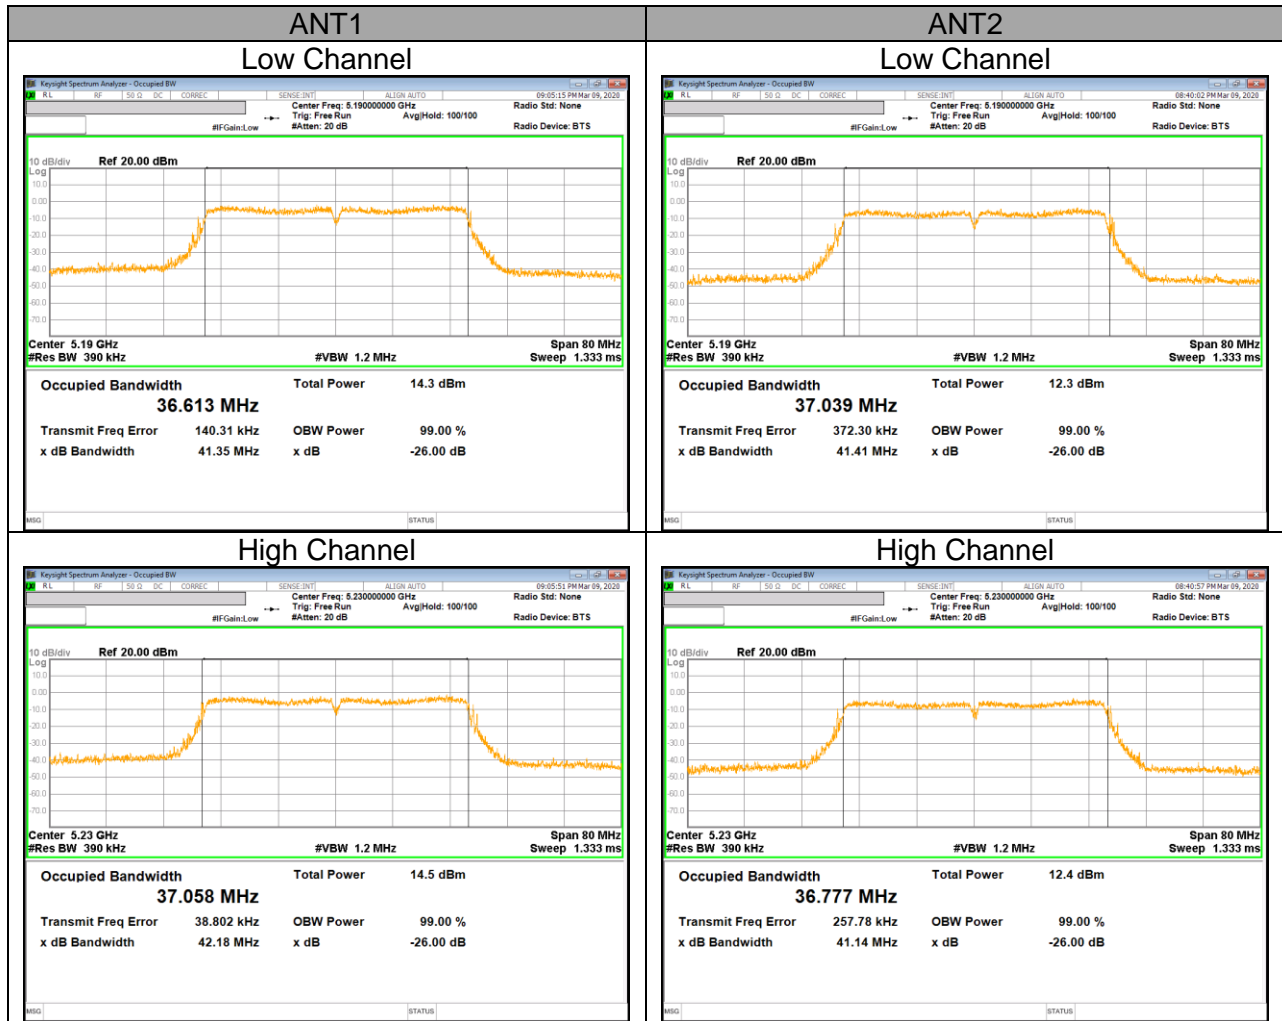


**UNII 5.2 GHz IEEE 802.11ac VHT80 mode**

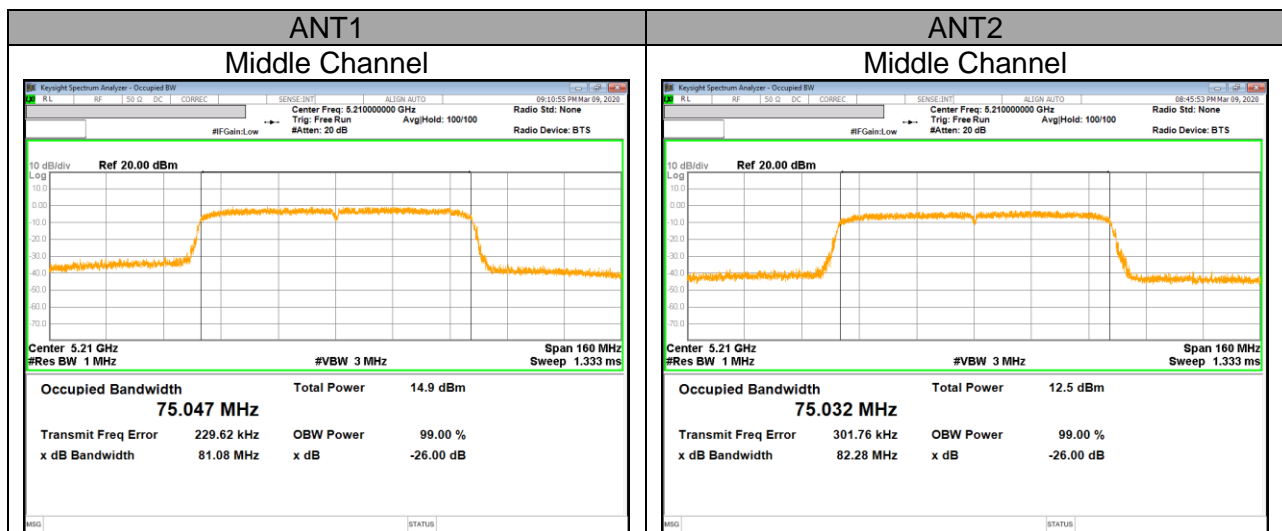





**UNII 5.3 GHz IEEE 802.11a mode**

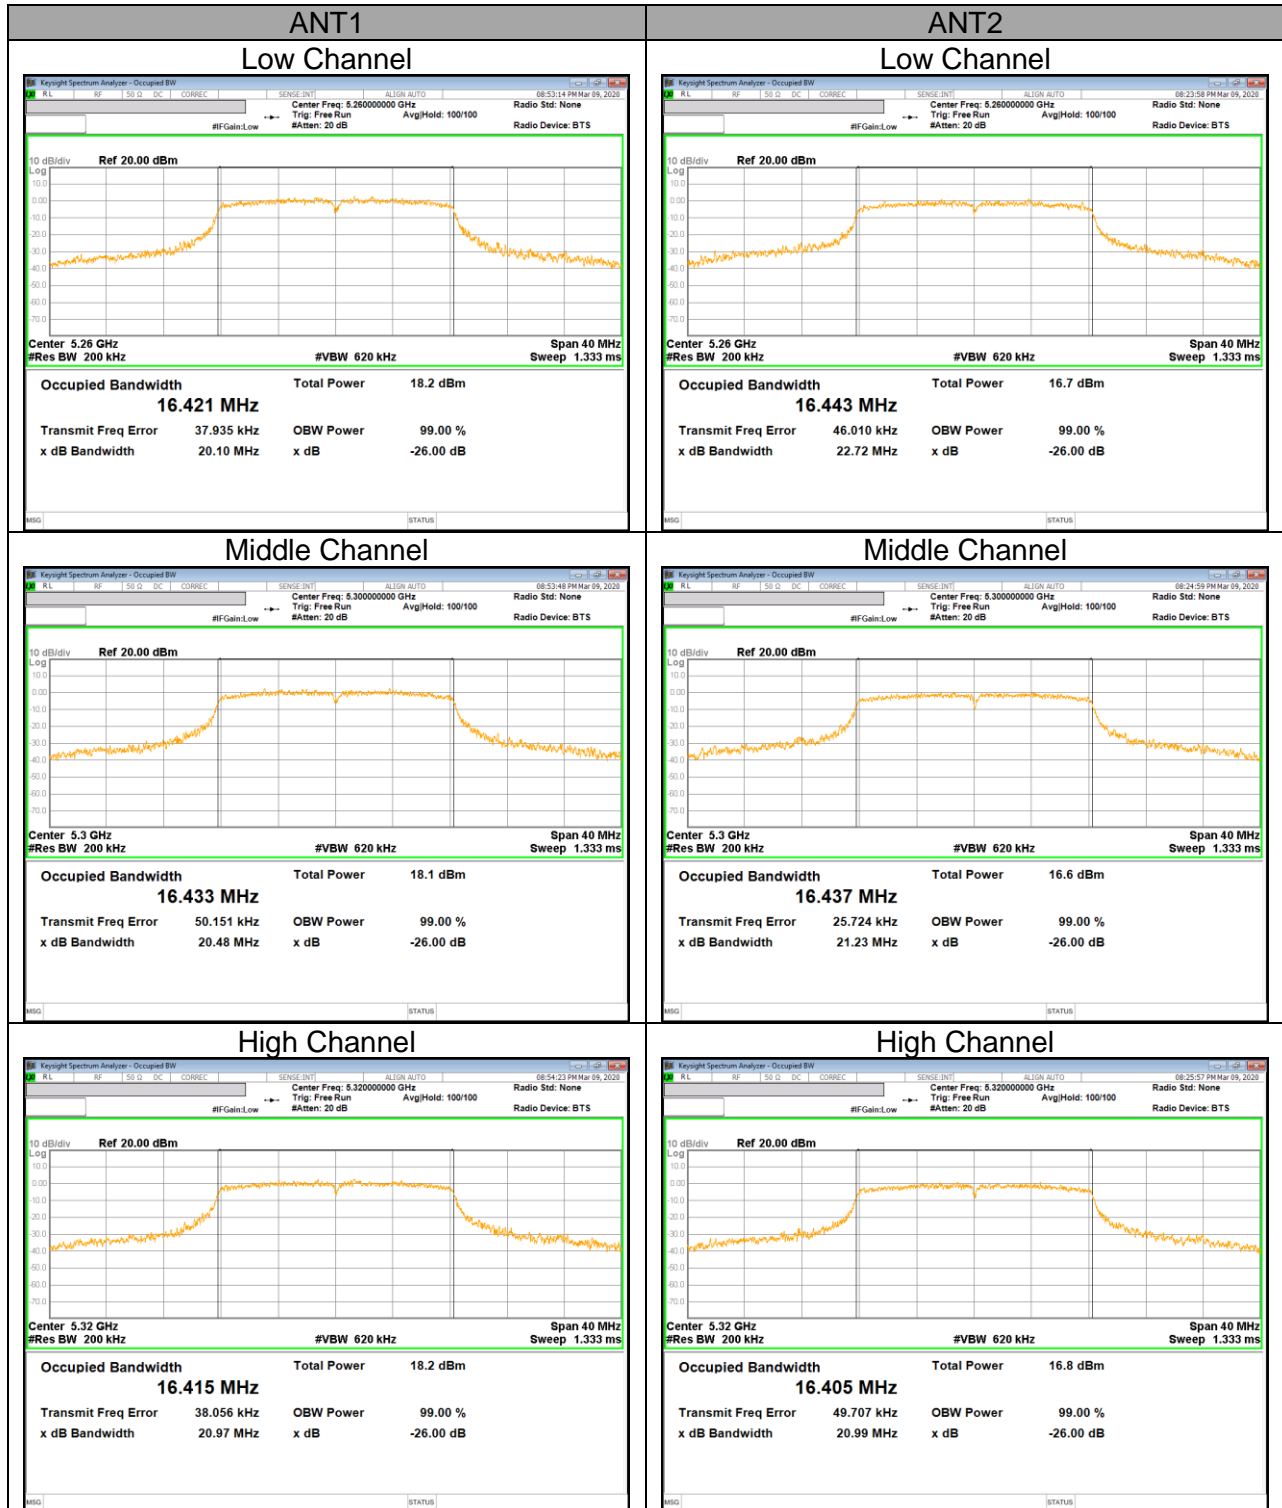


**UNII 5.3 GHz IEEE 802.11n HT20 mode**

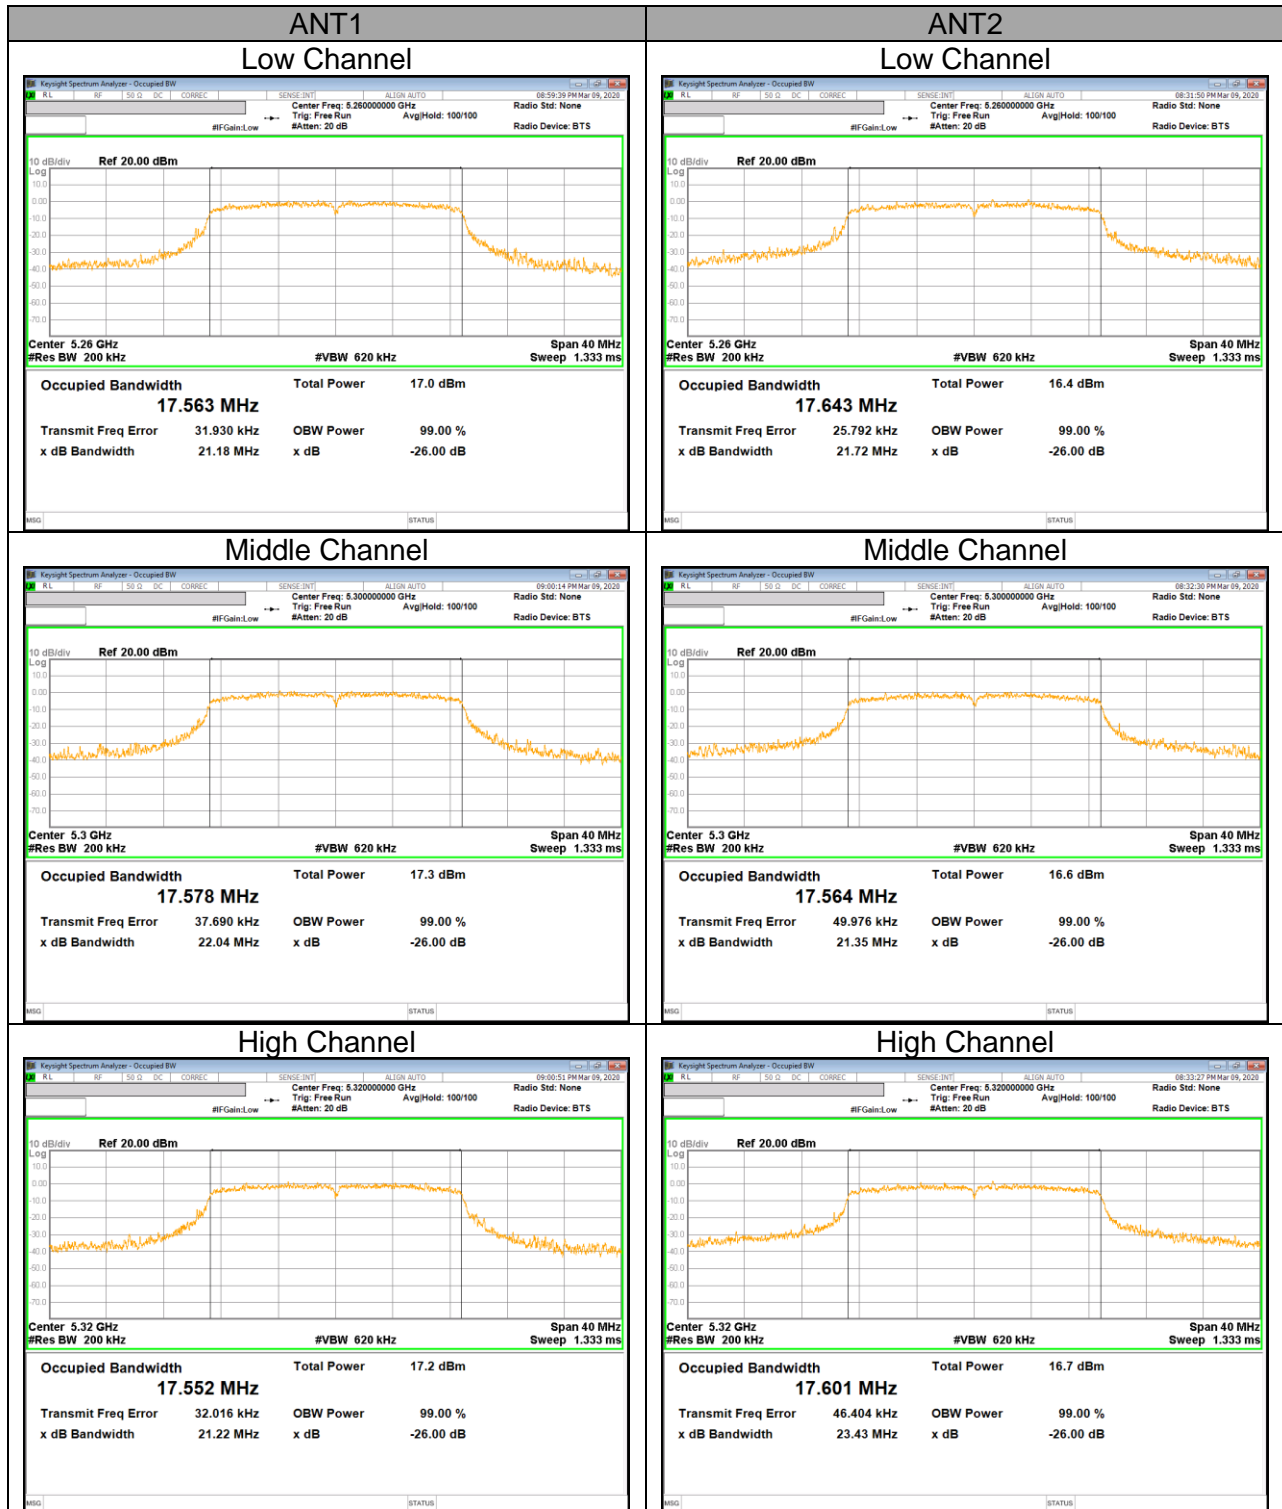


**UNII 5.3 GHz IEEE 802.11n HT40 mode**

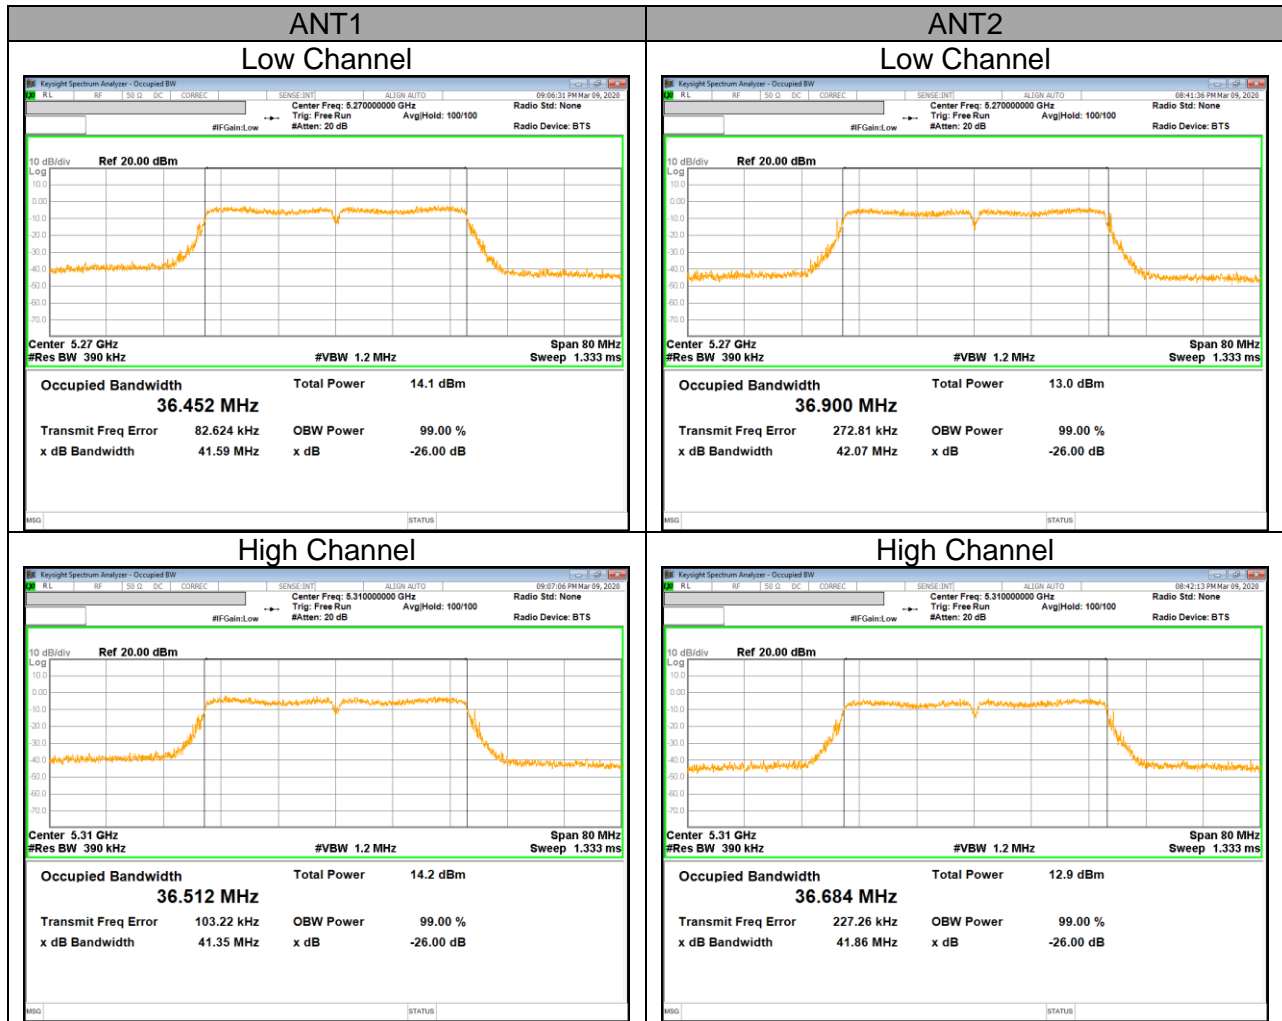


**UNII 5.3 GHz IEEE 802.11ac VHT80 mode**

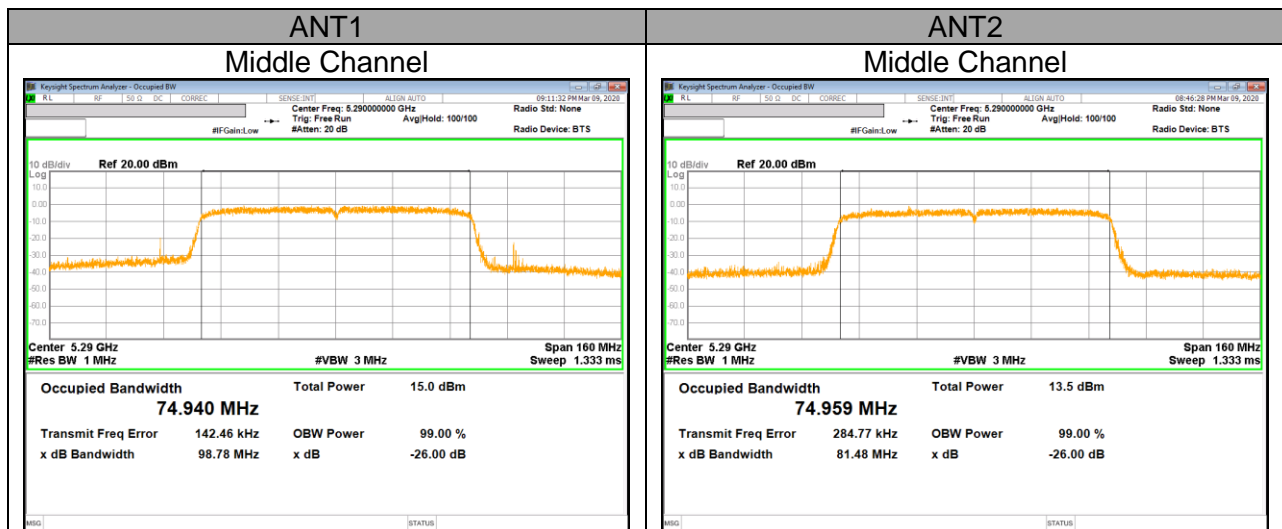


**UNII 5.5 GHz IEEE 802.11a mode**

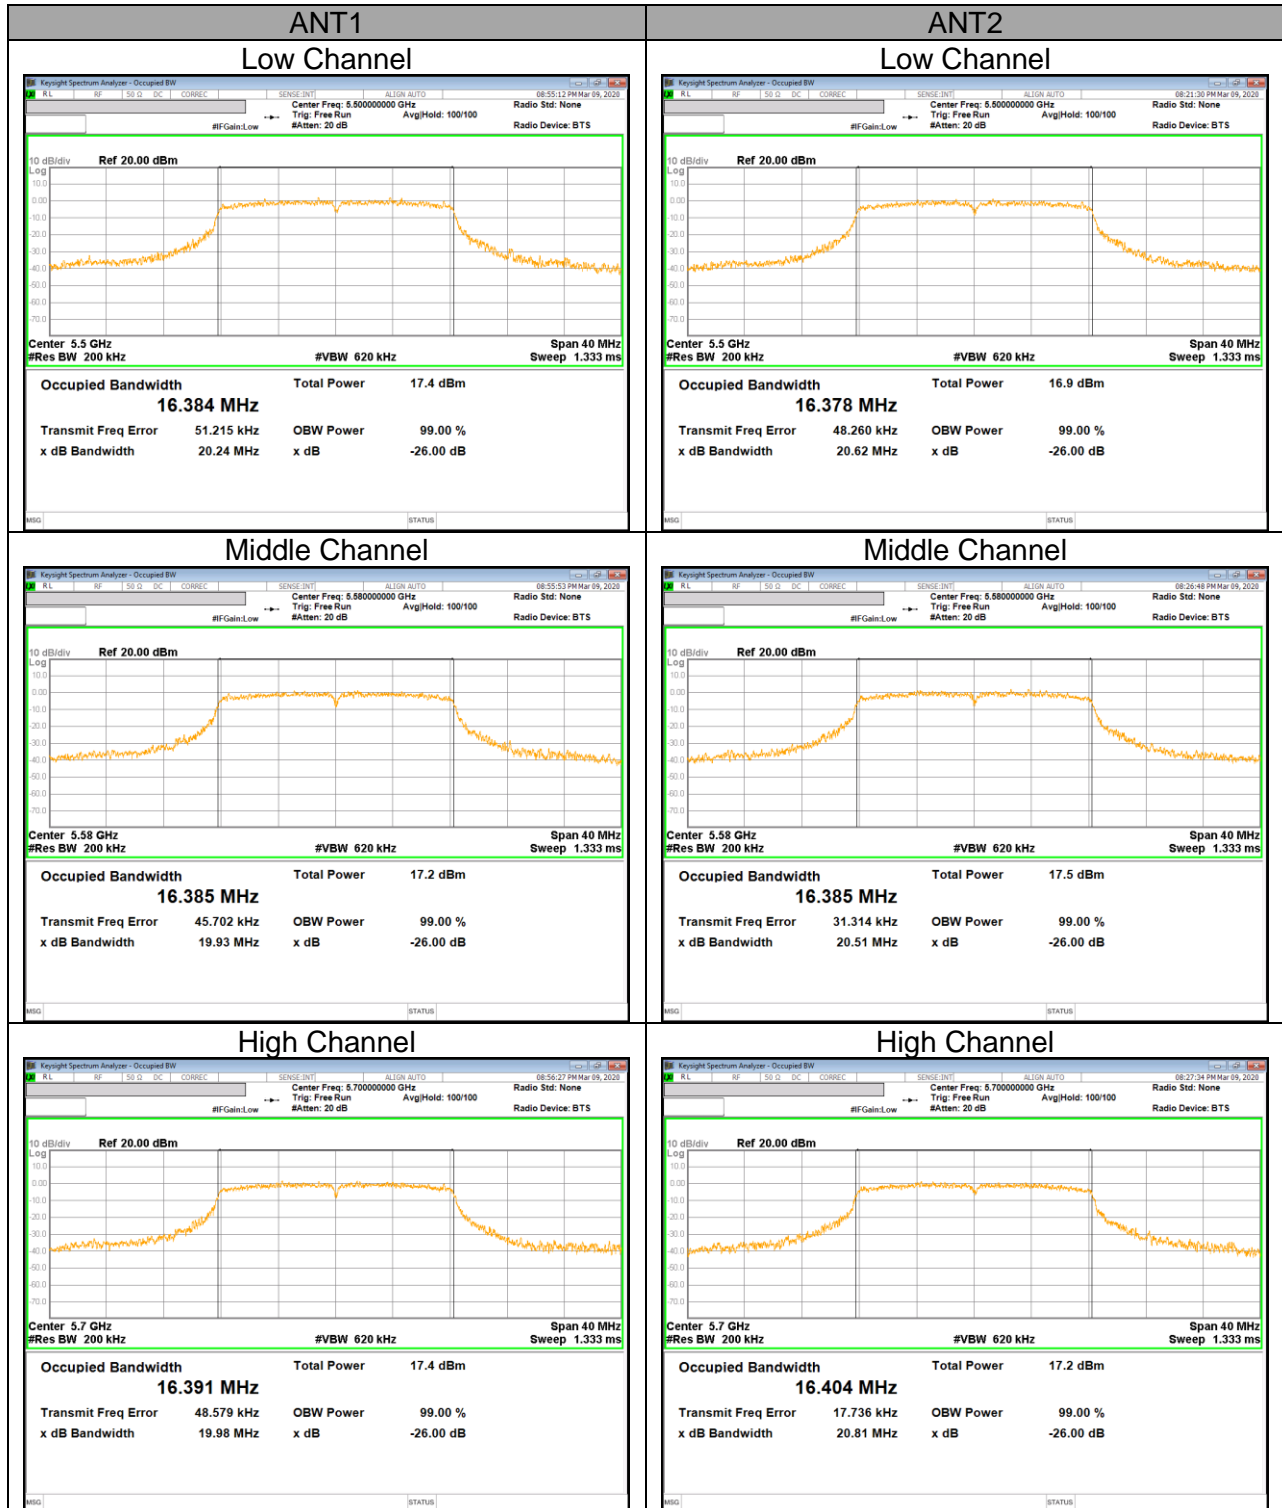


**UNII 5.5 GHz IEEE 802.11n HT20 mode**

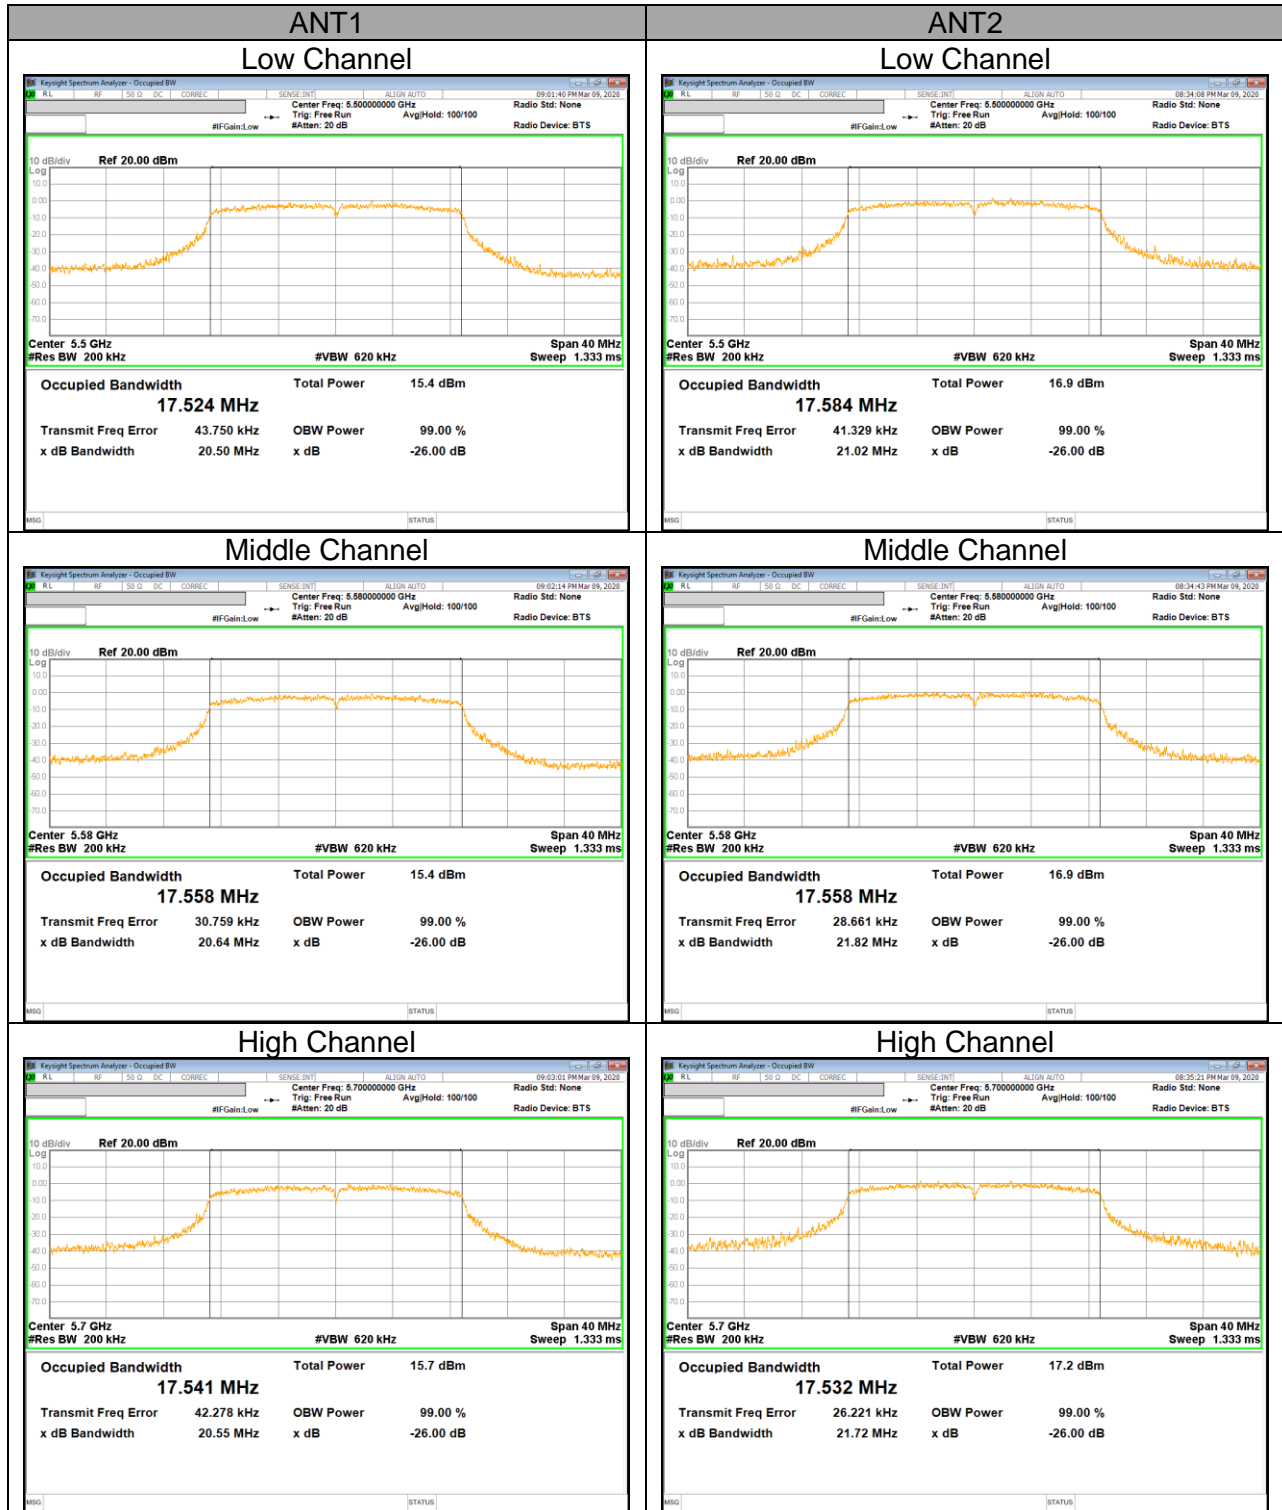


**UNII 5.5 GHz IEEE 802.11n HT40 mode**

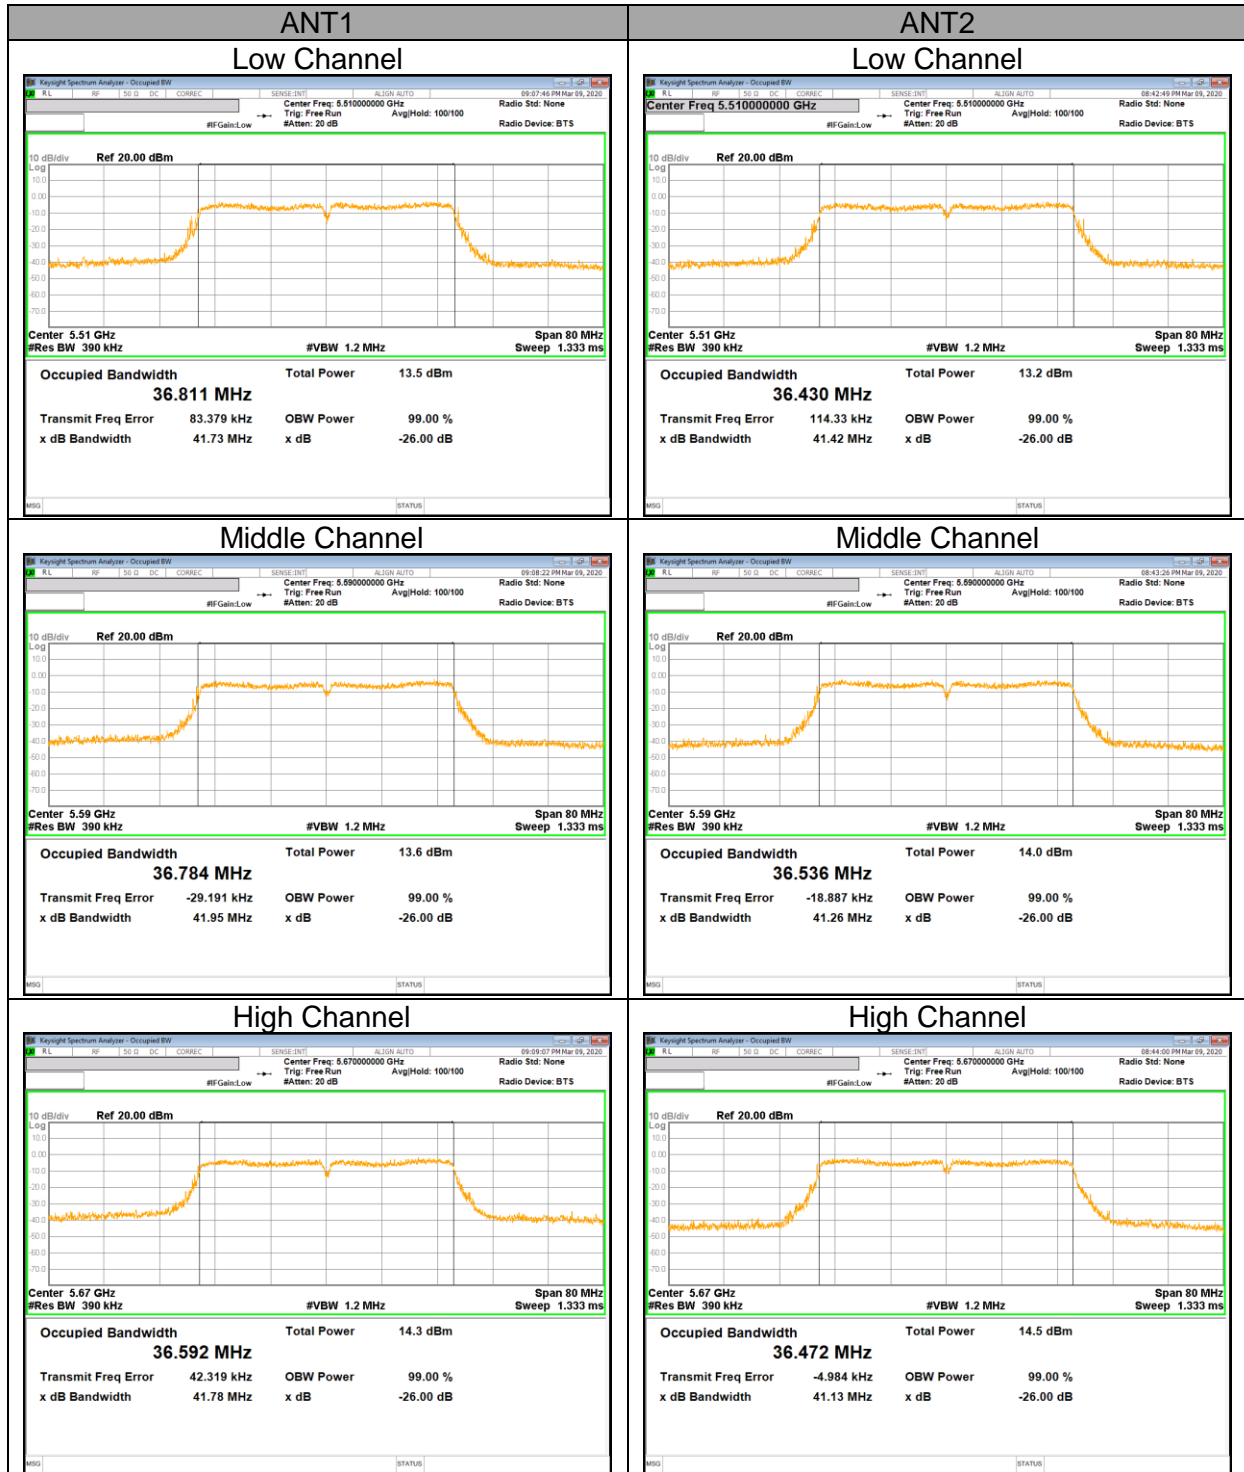


**UNII 5.5 GHz IEEE 802.11ac VHT80 mode**

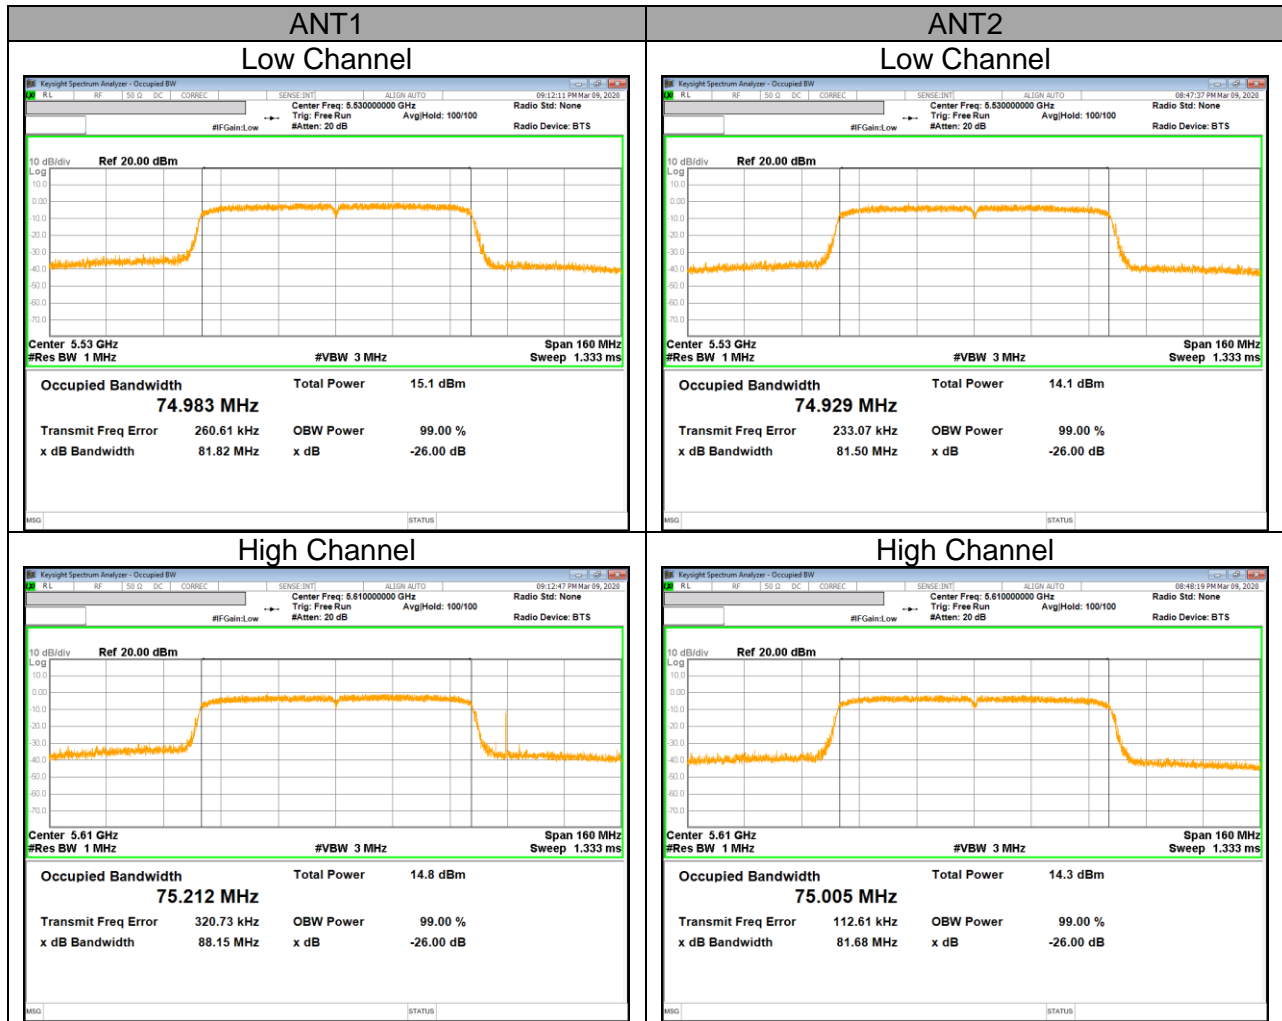

**UNII Straddle Channel IEEE 802.11a / n HT20 / n HT40 / ac VHT80 mode**

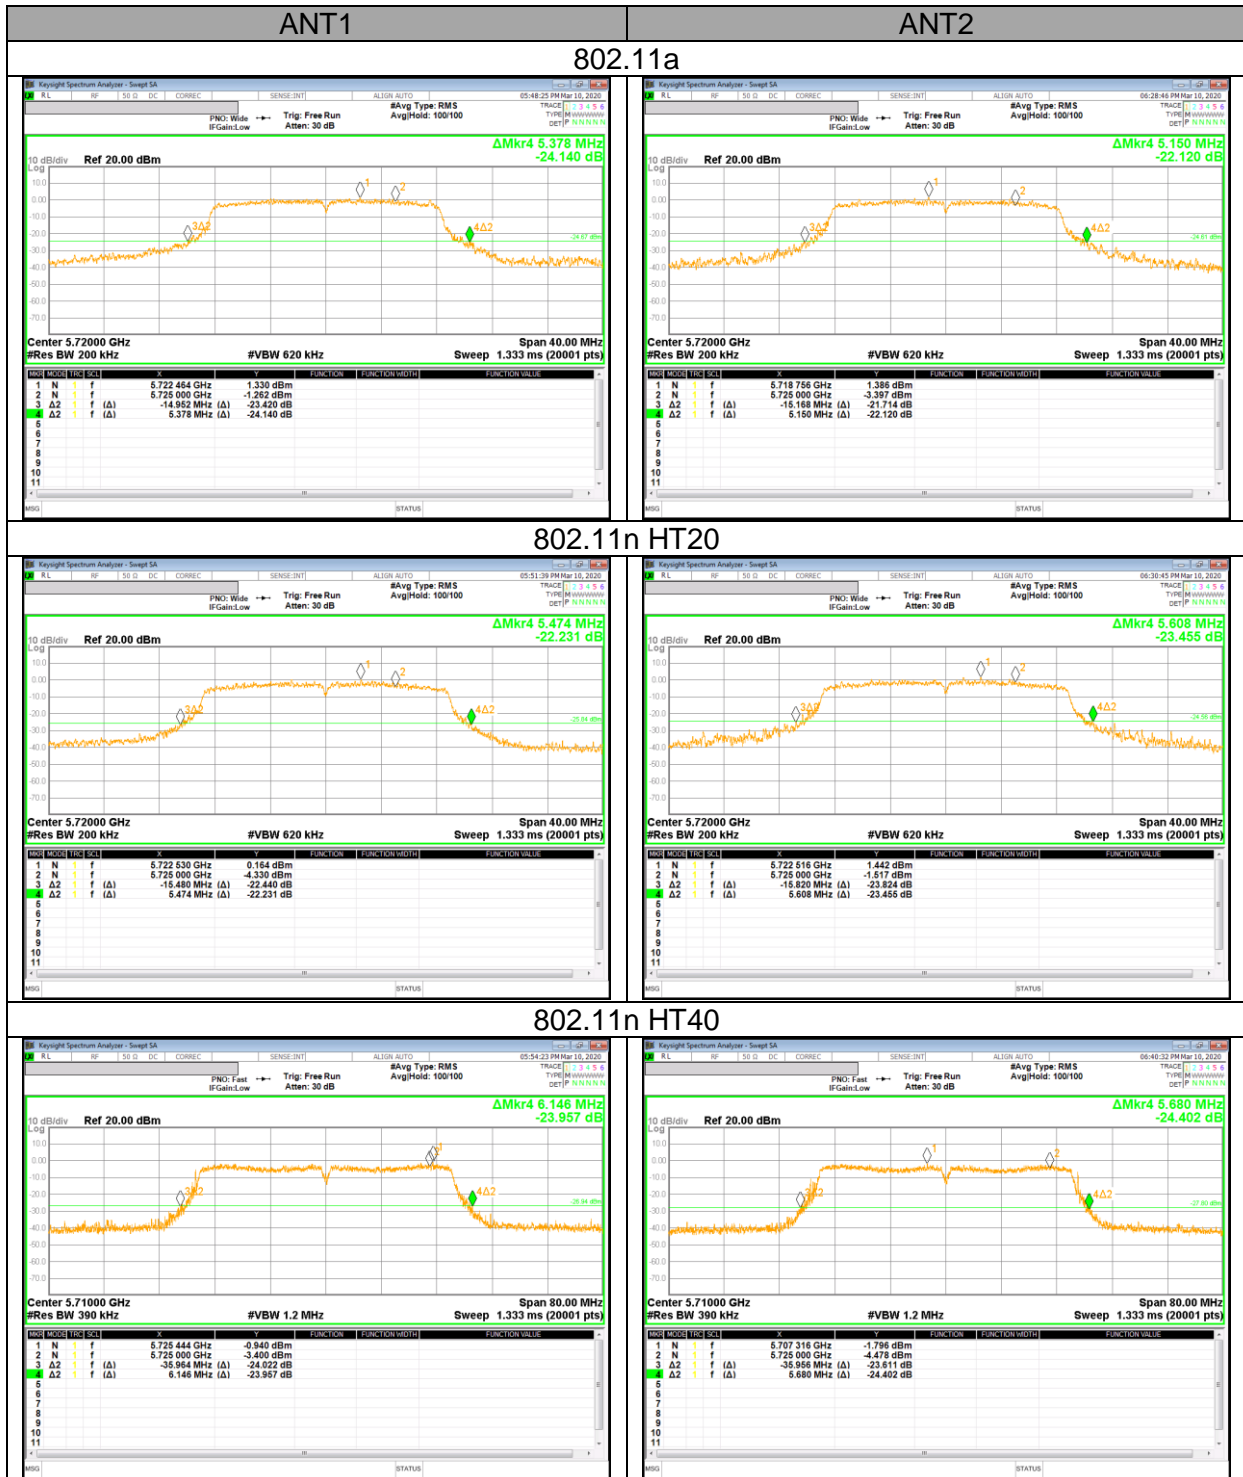



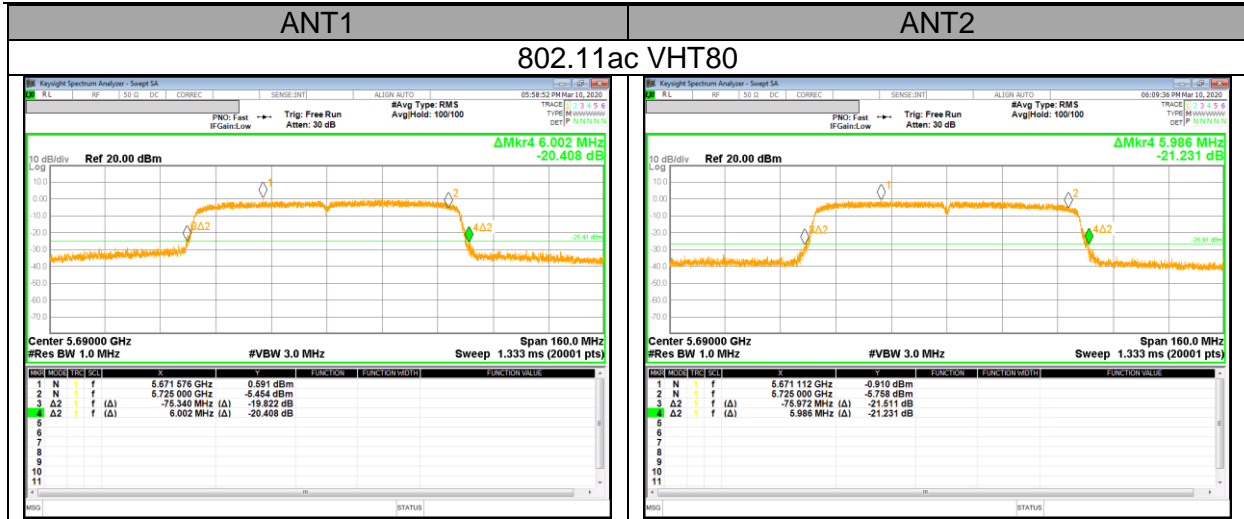

**10.1.3. 99% BANDWIDTH PLOTS**  
**UNII 5.2 GHz IEEE 802.11a mode**

