

Wi-Fi 2.4 GHz


Frequency: 2412 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
 Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.836$ S/m; $\epsilon_r = 39.812$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1591; Calibrated: 2019-09-11
- Probe: EX3DV4 - SN7545; ConvF(7.17, 7.17, 7.17) @ 2412 MHz; Calibrated: 2019-09-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI V6.0 (20deg probe tilt) (Left); Type: QD OVA 003 AA; Serial: 2111

Rear/802.11b mode ch.1/Area Scan (11x8x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 0.899 W/kg

Rear/802.11b mode ch.1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 21.03 V/m; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 1.73 W/kg
SAR(1 g) = 0.592 W/kg; SAR(10 g) = 0.232 W/kg
 Maximum value of SAR (measured) = 0.930 W/kg

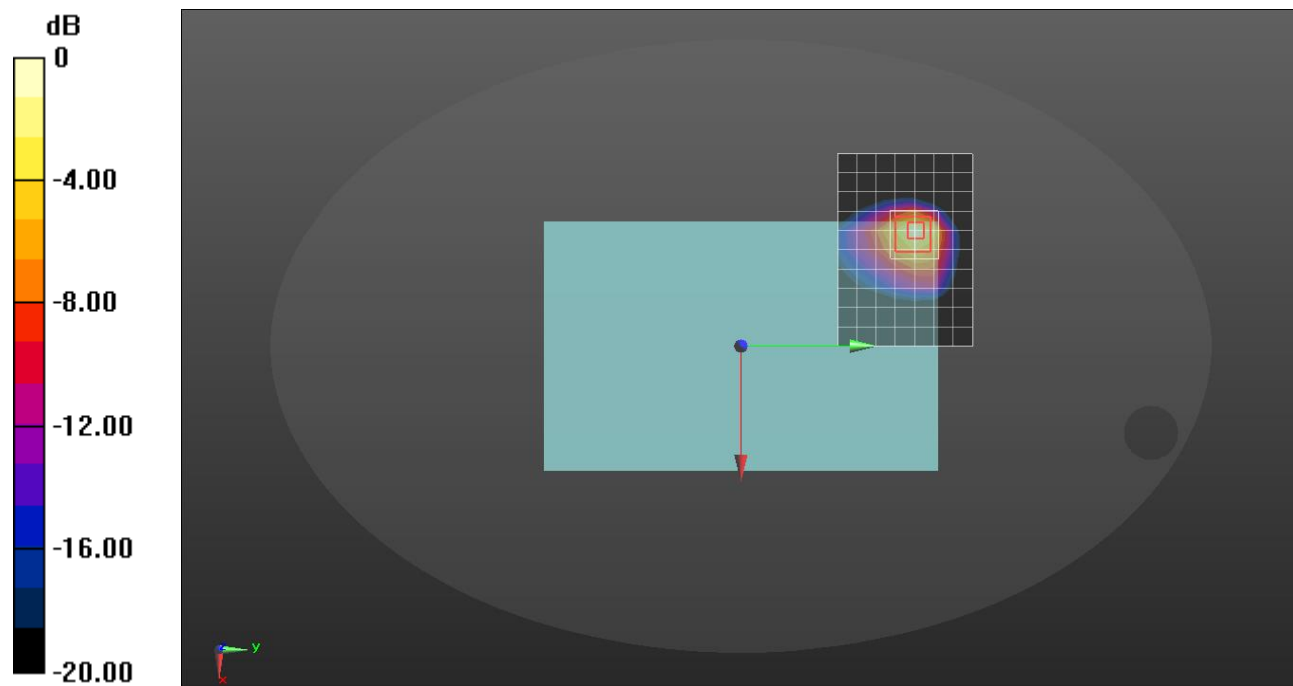

0 dB = 0.930 W/kg = -0.32 dBW/kg

Wi-Fi 2.4 GHz

Frequency: 2462 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
 Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.894$ S/m; $\epsilon_r = 39.635$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1591; Calibrated: 2019-09-11
- Probe: EX3DV4 - SN7545; ConvF(7.17, 7.17, 7.17) @ 2462 MHz; Calibrated: 2019-09-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI V6.0 (20deg probe tilt) (Left); Type: QD OVA 003 AA; Serial: 2111

Edge 4/802.11b mode ch.11/Area Scan (6x26x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.12 W/kg


Edge 4/802.11b mode ch.11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.59 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.16 W/kg

SAR(1 g) = 0.902 W/kg; SAR(10 g) = 0.313 W/kg

Maximum value of SAR (measured) = 1.58 W/kg

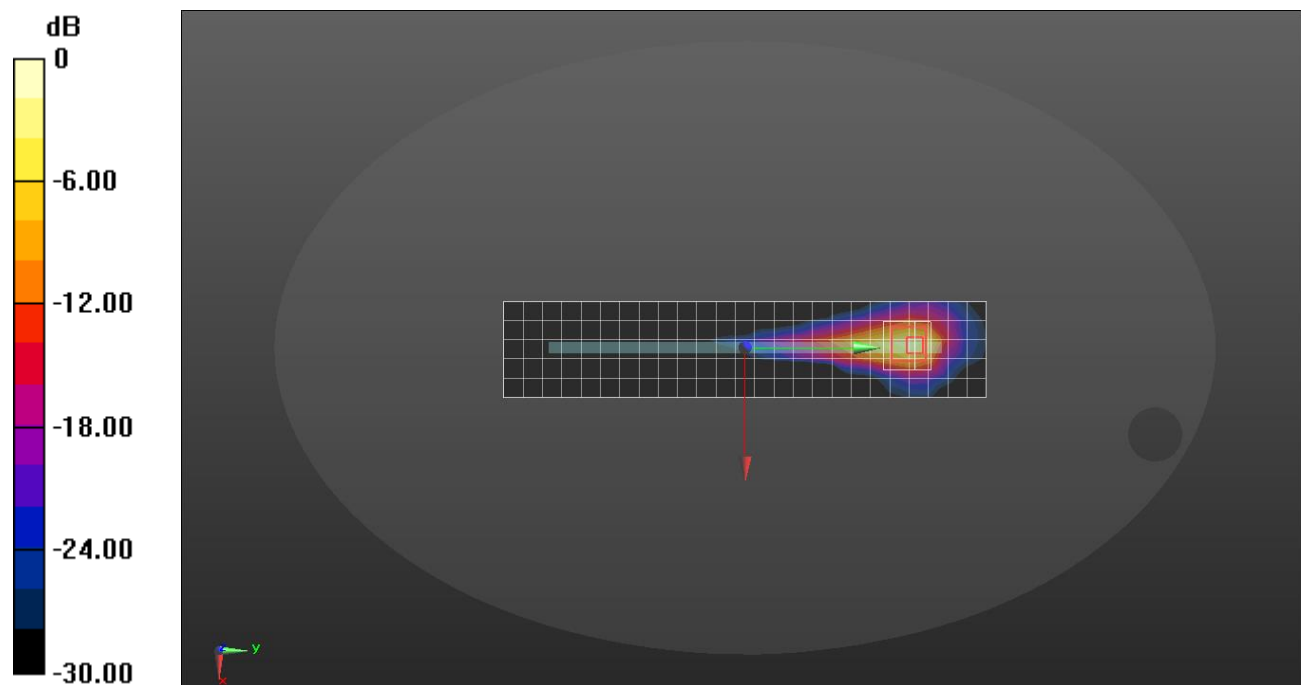

0 dB = 1.58 W/kg = 1.99 dBW/kg

Wi-Fi 2.4 GHz

Frequency: 2462 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
 Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.894$ S/m; $\epsilon_r = 39.635$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1591; Calibrated: 2019-09-11
- Probe: EX3DV4 - SN7545; ConvF(7.17, 7.17, 7.17) @ 2462 MHz; Calibrated: 2019-09-23
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI V6.0 (20deg probe tilt) (Left); Type: QD OVA 003 AA; Serial: 2111

Edge 4/802.11g mode ch.11/Area Scan (6x24x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 0.616 W/kg


Edge 4/802.11g mode ch.11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.32 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.29 W/kg

SAR(1 g) = 0.682 W/kg; SAR(10 g) = 0.249 W/kg

Maximum value of SAR (measured) = 1.15 W/kg

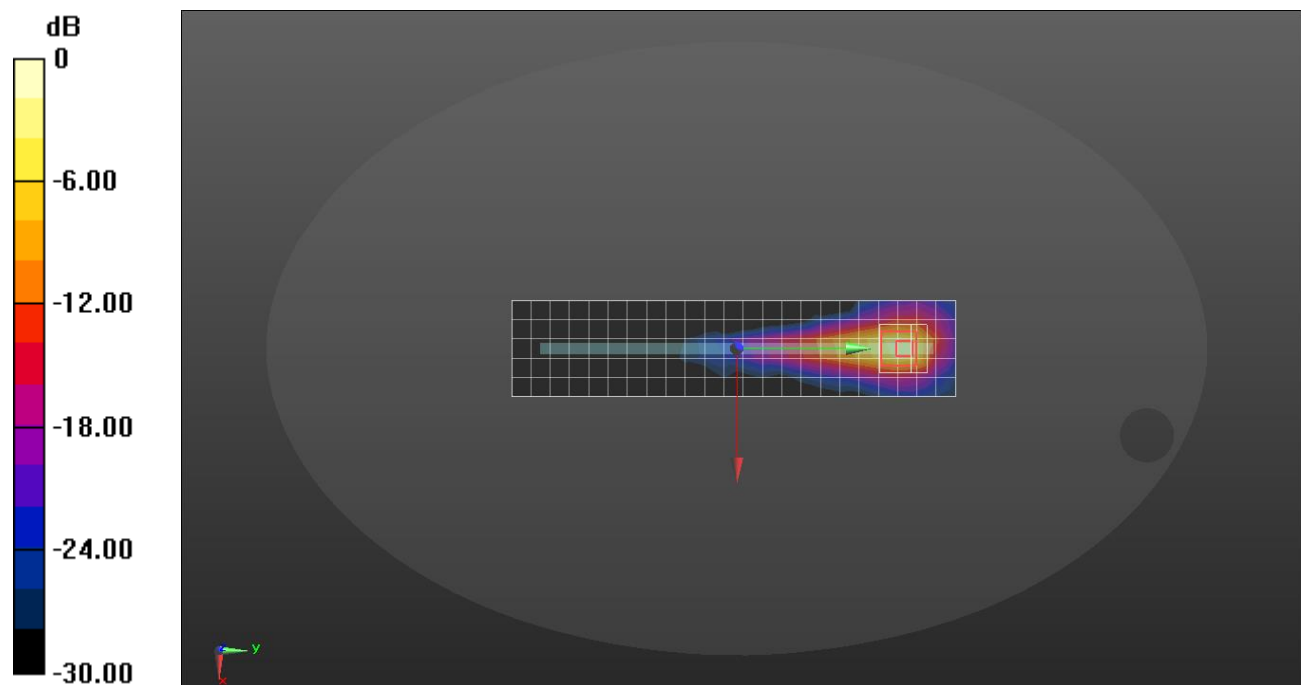

0 dB = 1.15 W/kg = 0.61 dBW/kg