



FCC CFR47 PART 15 SUBPART C

Bluetooth Low Energy

CERTIFICATION TEST REPORT

FOR

Bluetooth/BLE Earset

MODEL NUMBER : SM-R140

FCC ID: A3LSMR140L

REPORT NUMBER: 4788060293-E3V2

ISSUE DATE: AUG 08, 2017

Prepared for
SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Prepared by
UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433



Revision History

| <u>Rev.</u> | <u>Issue Date</u> | <u>Revisions</u> | <u>Revised By</u> |
|-------------|-------------------|--------------------------|-------------------|
| V1 | 07/28/17 | Initial issue | Junwhan Lee |
| V2 | 08/08/17 | Removed ISED information | Junwhan Lee |

TABLE OF CONTENTS

| | |
|---|-----------|
| 1. ATTESTATION OF TEST RESULTS | 4 |
| 2. TEST METHODOLOGY | 5 |
| 3. FACILITIES AND ACCREDITATION | 5 |
| 4. CALIBRATION AND UNCERTAINTY | 5 |
| 4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> | <i>5</i> |
| 4.2. <i>SAMPLE CALCULATION</i> | <i>5</i> |
| 4.3. <i>MEASUREMENT UNCERTAINTY.....</i> | <i>6</i> |
| 5. EQUIPMENT UNDER TEST | 7 |
| 5.1. <i>DESCRIPTION OF EUT</i> | <i>7</i> |
| 5.2. <i>MAXIMUM OUTPUT POWER.....</i> | <i>7</i> |
| 5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> | <i>7</i> |
| 5.4. <i>WORST-CASE CONFIGURATION AND MODE.....</i> | <i>7</i> |
| 5.5. <i>DESCRIPTION OF TEST SETUP.....</i> | <i>8</i> |
| 6. TEST AND MEASUREMENT EQUIPMENT | 10 |
| 7. REFERENCE MEASUREMENT RESULTS..... | 11 |
| 7.1. <i>ON TIME AND DUTY CYCLE RESULTS.....</i> | <i>11</i> |
| 7.2. <i>99% BANDWIDTH.....</i> | <i>12</i> |
| 8. SUMMARY TABLE | 14 |
| 9. ANTENNA PORT TEST RESULTS..... | 15 |
| 9.1. <i>6 dB BANDWIDTH.....</i> | <i>15</i> |
| 9.2. <i>OUTPUT POWER.....</i> | <i>17</i> |
| 9.3. <i>AVERAGE POWER.....</i> | <i>19</i> |
| 9.4. <i>PSD</i> | <i>20</i> |
| 9.5. <i>OUT-OF-BAND EMISSIONS</i> | <i>22</i> |
| 10. RADIATED TEST RESULTS | 26 |
| 10.1. <i>LIMITS AND PROCEDURE.....</i> | <i>26</i> |
| 10.2. <i>TRANSMITTER ABOVE 1 GHz.....</i> | <i>28</i> |
| 10.3. <i>WORST-CASE BELOW 1 GHz</i> | <i>38</i> |
| 11. SETUP PHOTOS | 40 |

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: Bluetooth/BLE Earset
MODEL NUMBER: SM-R140
SERIAL NUMBER: R3AJ7002T6J, R3AJ7002T9D (RADIATED);
R3AJ7002TAF (CONDUCTED)
DATE TESTED: JUL 10, 2017 - JUL 19, 2017

| APPLICABLE STANDARDS | |
|--------------------------|--------------|
| STANDARD | TEST RESULTS |
| CFR 47 Part 15 Subpart C | Pass |

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:

Tested By:



SungGil Park
Suwon Lab Engineer
UL Korea, Ltd.

Junwhan Lee
Suwon Lab Engineer
UL Korea, Ltd.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. KDB 558074 D01 DTS Meas Guidance v04.
4. ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

| 218 Maeyeong-ro |
|---|
| <input checked="" type="checkbox"/> Chamber 1 |
| <input checked="" type="checkbox"/> Chamber 2 |

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER | UNCERTAINTY |
|---------------------------------------|-------------|
| Conducted Disturbance, 0.15 to 30 MHz | 2.32 dB |
| Radiated Disturbance, Below 1GHz | 4.14 dB |
| Radiated Disturbance, Above 1 GHz | 5.97 dB |

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a Bluetooth/BLE Earset.
This test report addresses the DTS (BLE) operational mode.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted output power as follows:

| Frequency Range [MHz] | Mode | Power Mode | Output Power [dBm] | Output Power [mW] |
|-----------------------|------|------------|--------------------|-------------------|
| 2402 - 2480 | BLE | Peak | 11.119 | 12.94 |
| | | Average | 10.850 | 12.16 |

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an internal antenna, with a maximum gain of -4.94 dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

NONE


- This EUT didn't operated during charging mode.

TEST SETUP

The EUT is a stand-alone unit during the tests.
Test software exercised the EUT to enable BLE mode.

SETUP DIAGRAM FOR TESTS(Conducted)

For radiated test, test were performed EUT standalone condition.

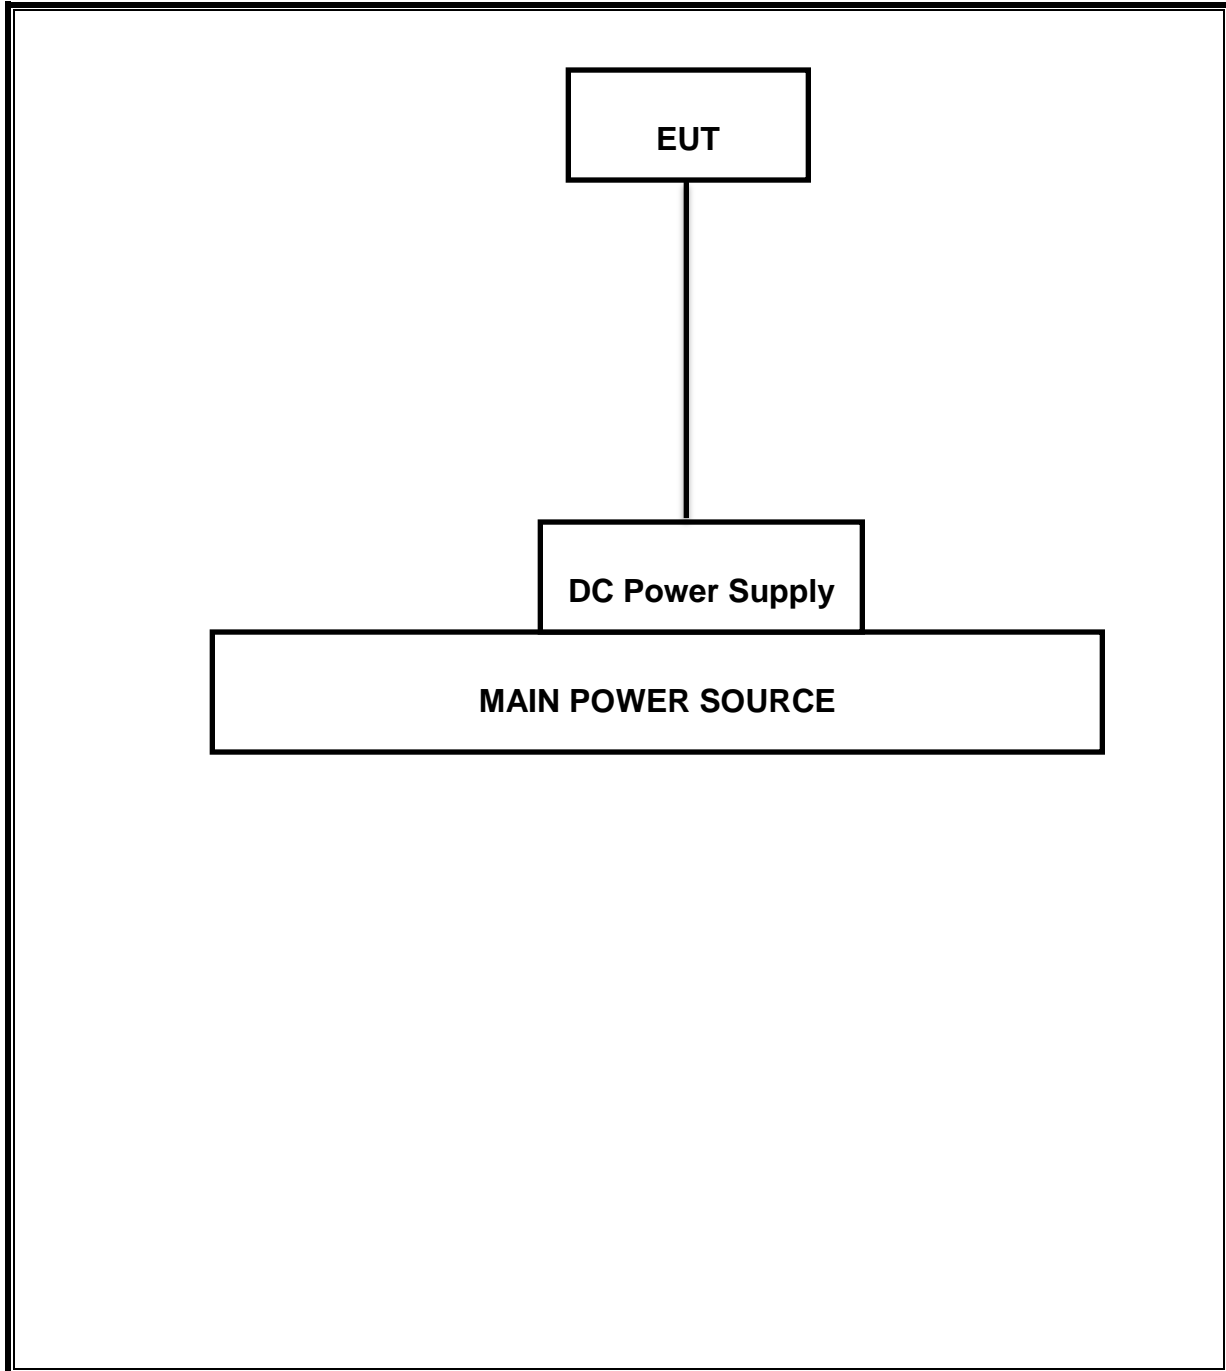

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| Test Equipment List | | | | |
|----------------------------|---------------|------------------------|------------|----------|
| Description | Manufacturer | Model | S/N | Cal Due |
| Antenna, Bilog, 30MHz-1GHz | SCHWARZBECK | VULB9163 | 750 | 10-14-18 |
| Antenna, Bilog, 30MHz-1GHz | SCHWARZBECK | VULB9163 | 749 | 04-14-19 |
| Antenna, Horn, 18 GHz | ETS | 3115 | 00167211 | 10-14-18 |
| Antenna, Horn, 18 GHz | ETS | 3117 | 00168724 | 05-31-19 |
| Antenna, Horn, 18 GHz | ETS | 3117 | 00168717 | 05-31-19 |
| Antenna, Horn, 40 GHz | ETS | 3116C | 00166155 | 11-30-17 |
| Antenna, Horn, 40 GHz | ETS | 3116C-PA | 00168841 | 12-15-17 |
| Preamplifier, 1000 MHz | Sonoma | 310N | 341282 | 08-17-17 |
| Preamplifier, 1000 MHz | Sonoma | 310N | 351741 | 08-16-17 |
| Preamplifier | ETS | 3115-PA | 00167475 | 08-17-17 |
| Preamplifier, 18 GHz | Miteq | AFS42-00101800-25-S-42 | 1896138 | 08-16-17 |
| Spectrum Analyzer, 44 GHz | Agilent / HP | N9030A | MY54170614 | 08-17-17 |
| Spectrum Analyzer, 44 GHz | Agilent / HP | N9030A | MY54490312 | 03-09-18 |
| Average Power Sensor | Agilent / HP | U2000 | MY54270007 | 08-17-17 |
| EMI Test Receive, 40 GHz | R&S | ESU40 | 100439 | 08-17-17 |
| EMI Test Receive, 40 GHz | R&S | ESU40 | 100457 | 08-16-17 |
| EMI Test Receive, 3 GHz | R&S | ESR3 | 101832 | 08-16-17 |
| Low Pass Filter 5GHz | Micro-Tronics | LPS17541 | 009 | 08-17-17 |
| Low Pass Filter 5GHz | Micro-Tronics | LPS17541 | 015 | 08-16-17 |
| High Pass Filter 3GHz | Micro-Tronics | HPM17543 | 010 | 08-17-17 |
| High Pass Filter 3GHz | Micro-Tronics | HPM17543 | 015 | 08-16-17 |
| High Pass Filter 6GHz | Micro-Tronics | HPM17542 | 009 | 08-17-17 |
| High Pass Filter 6GHz | Micro-Tronics | HPM17542 | 016 | 08-16-17 |
| Antenna, Loop, 9kHz-30MHz | R&S | HFH2-Z2 | 100418 | 11-25-17 |
| UL Software | | | | |
| Description | Manufacturer | Model | Version | |
| Radiated software | UL | UL EMC | Ver 9.5 | |
| AC Line Conducted software | UL | UL EMC | Ver 9.5 | |


7. REFERENCE MEASUREMENT RESULTS

7.1. ON TIME AND DUTY CYCLE RESULTS

LIMITS

None: for reporting purposes only.

| Mode | ON Time B [msec] | Period [msec] | Duty Cycle x [linear] | Duty Cycle [%] | Duty Cycle Correction Factor [dB] | 1/T Minimum VBW [kHz] |
|----------------------|------------------------|------------------|-----------------------------|----------------------|---|-----------------------------|
| 2400MHz Bands | | | | | | |
| BLE | 0.377 | 0.625 | 0.604 | 60.4% | 2.19 | 2.651 |

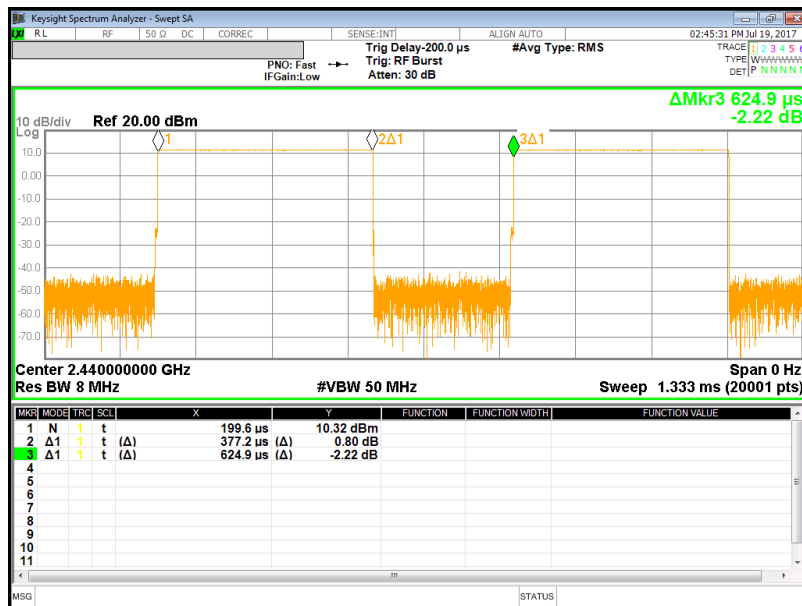

7.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.


TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth and to 1% of the span. The VBW is set to ≥ 3 times the RBW. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

| Channel | Frequency [MHz] | 99% Bandwidth [MHz] |
|---------|-----------------|---------------------|
| Low | 2402 | 1.052 |
| Mid | 2440 | 1.060 |
| High | 2480 | 1.060 |
| Worst | | 1.060 |

99% BANDWIDTH PLOTS

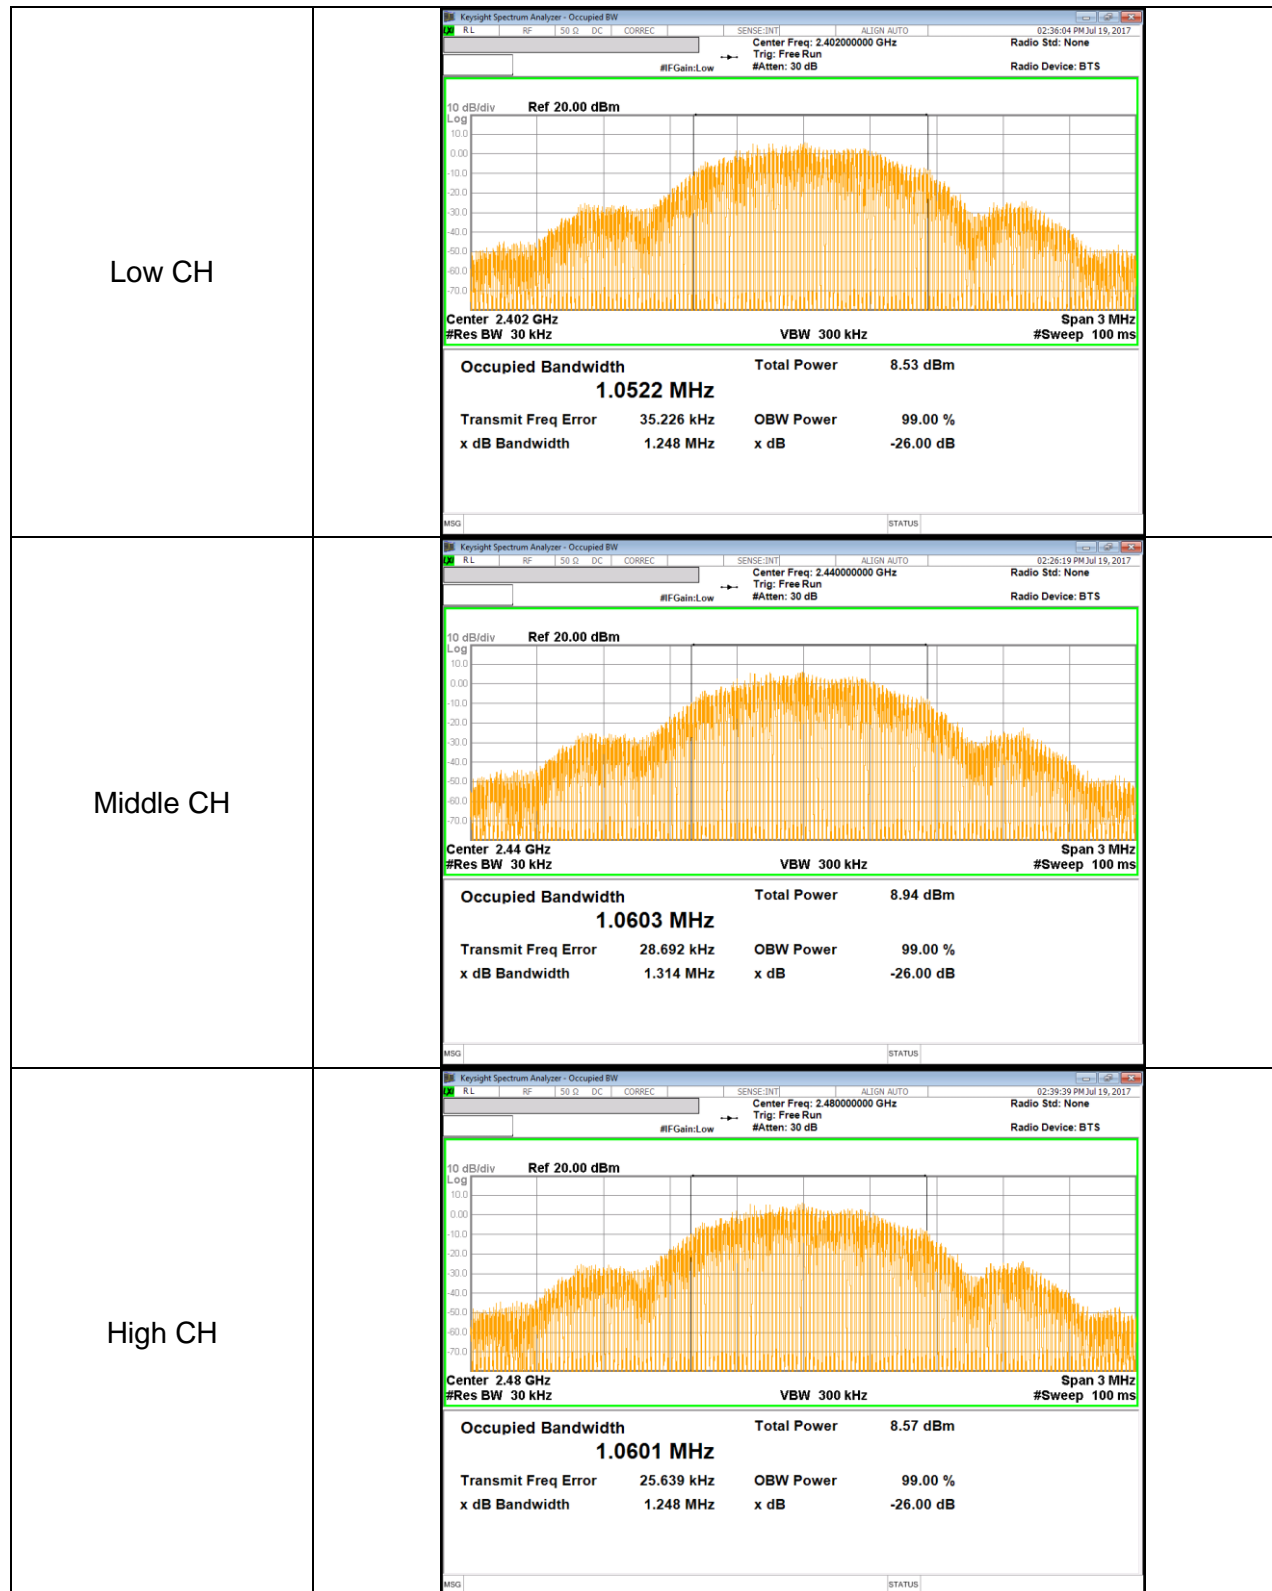

8. SUMMARY TABLE

| FCC Part Section | Test Description | Test Limit | Test Condition | Test Result | Worst Case |
|--------------------|---|------------|----------------|-------------|-------------------|
| 15.247 (a)(2) | Occupied Band width (6dB) | >500KHz | Conducted | Pass | 713.2 kHz |
| 2.1051, 15.247 (d) | Band Edge / Conducted Spurious Emission | -20dBc | | Pass | -35.755 dBm |
| 15.247 (b)(3) | TX conducted output power | <30dBm | | Pass | 11.119 dBm (Peak) |
| 15.247 (e) | PSD | <8dBm | | Pass | -4.41 dBm (Peak) |
| 15.205, 15.209 | Radiated Spurious Emission | < 54dBuV/m | Radiated | Pass | 48.19 dBuV/m (Av) |

9. ANTENNA PORT TEST RESULTS

9.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.


TEST PROCEDURE

Reference to KDB 558074 D01 DTS Meas Guidance v04: The transmitter output is connected to a spectrum analyzer with the RBW set to 100kHz, the VBW $\geq 3 \times$ RBW, peak detector and max hold.

RESULTS

| Channel | Frequency [MHz] | 6 dB Bandwidth [kHz] | Minimum Limit [kHz] |
|---------|-----------------|----------------------|---------------------|
| Low | 2402 | 713.5 | 500.0 |
| Mid | 2440 | 713.2 | 500.0 |
| High | 2480 | 716.6 | 500.0 |
| Worst | | 713.2 | 500.0 |

6 dB BANDWIDTH PLOTS

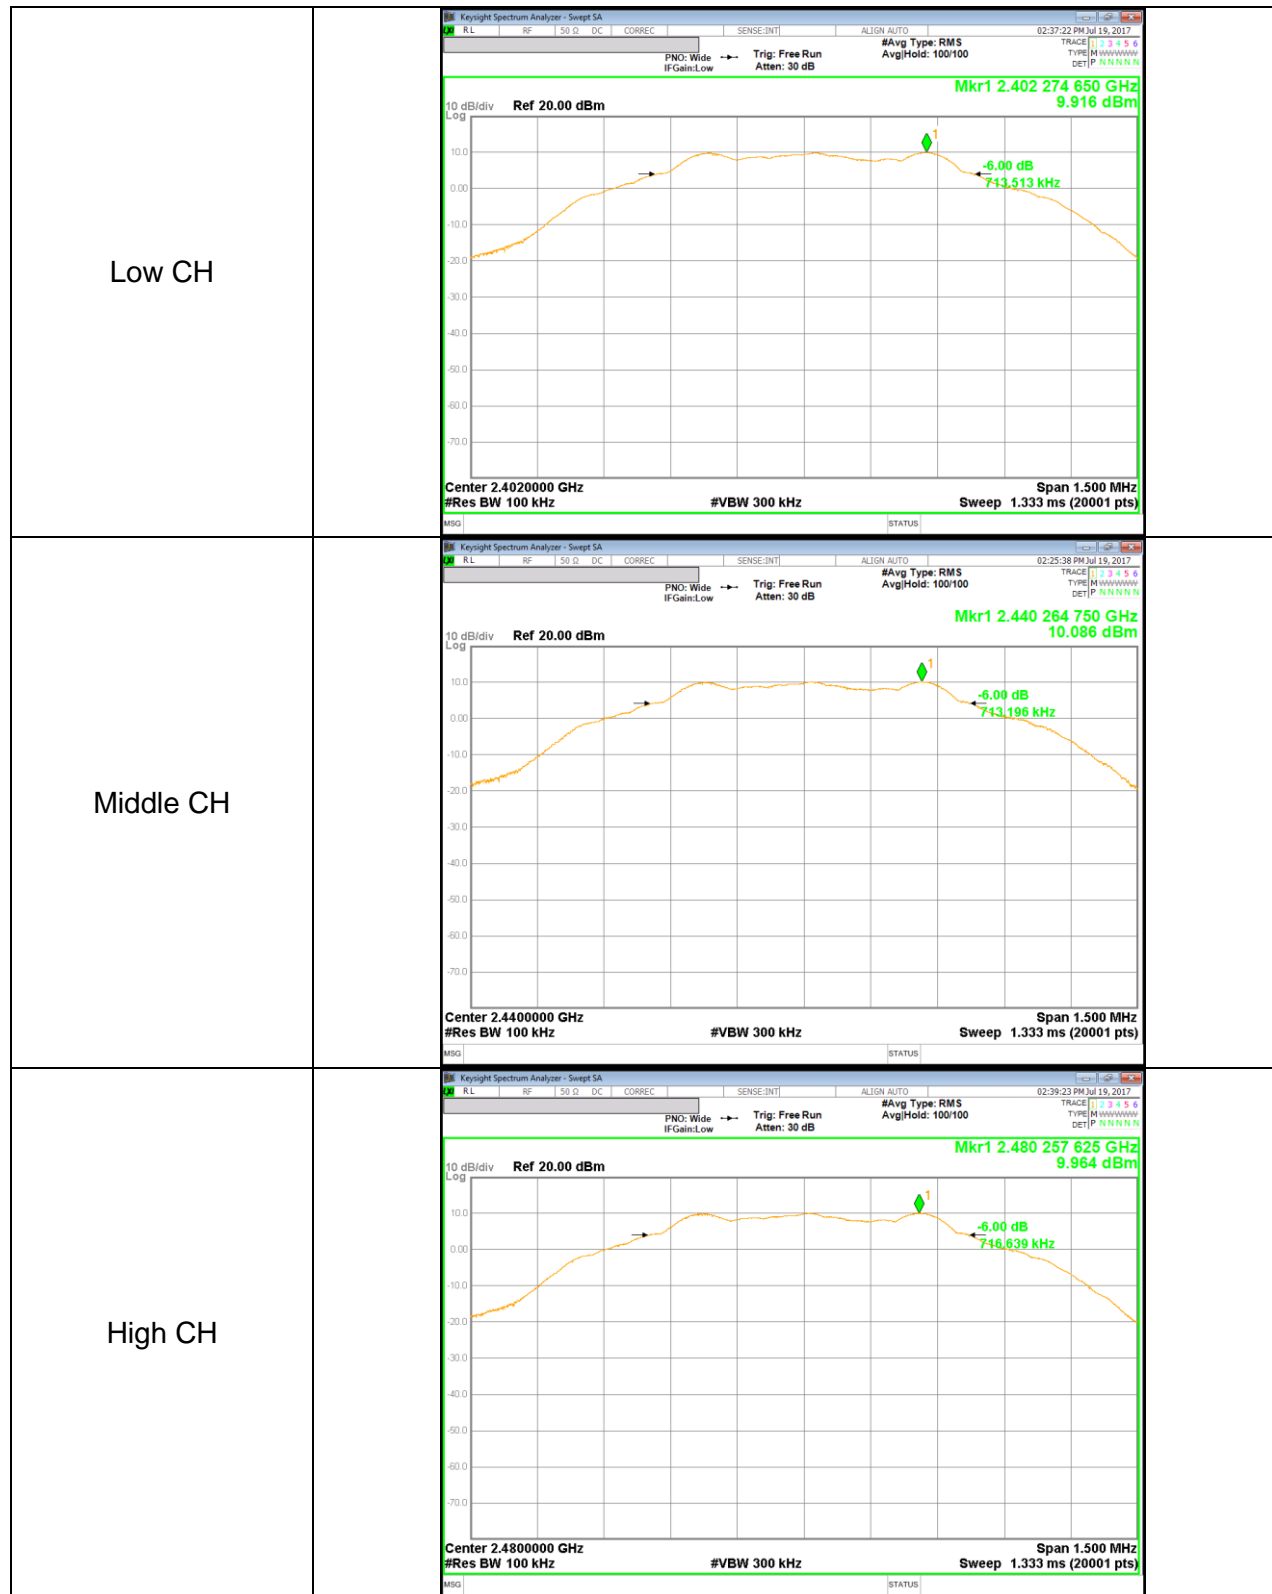

9.2. OUTPUT POWER

LIMITS

FCC §15.247 (b)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE

Peak power is measured using KDB558074 D01 DTS Meas Guidance v04 under section 9.1.1 utilizing spectrum analyzer.

RESULTS

| Channel | Frequency [MHz] | Peak Power Reading [dBm] | Limit [dBm] | Margin [dB] |
|---------|-----------------|--------------------------|-------------|-------------|
| Low | 2402 | 10.565 | 30.000 | -19.435 |
| Mid | 2440 | 11.119 | 30.000 | -18.881 |
| High | 2480 | 10.760 | 30.000 | -19.240 |
| Worst | | 11.119 | | -18.881 |

OUTPUT POWER PLOTS

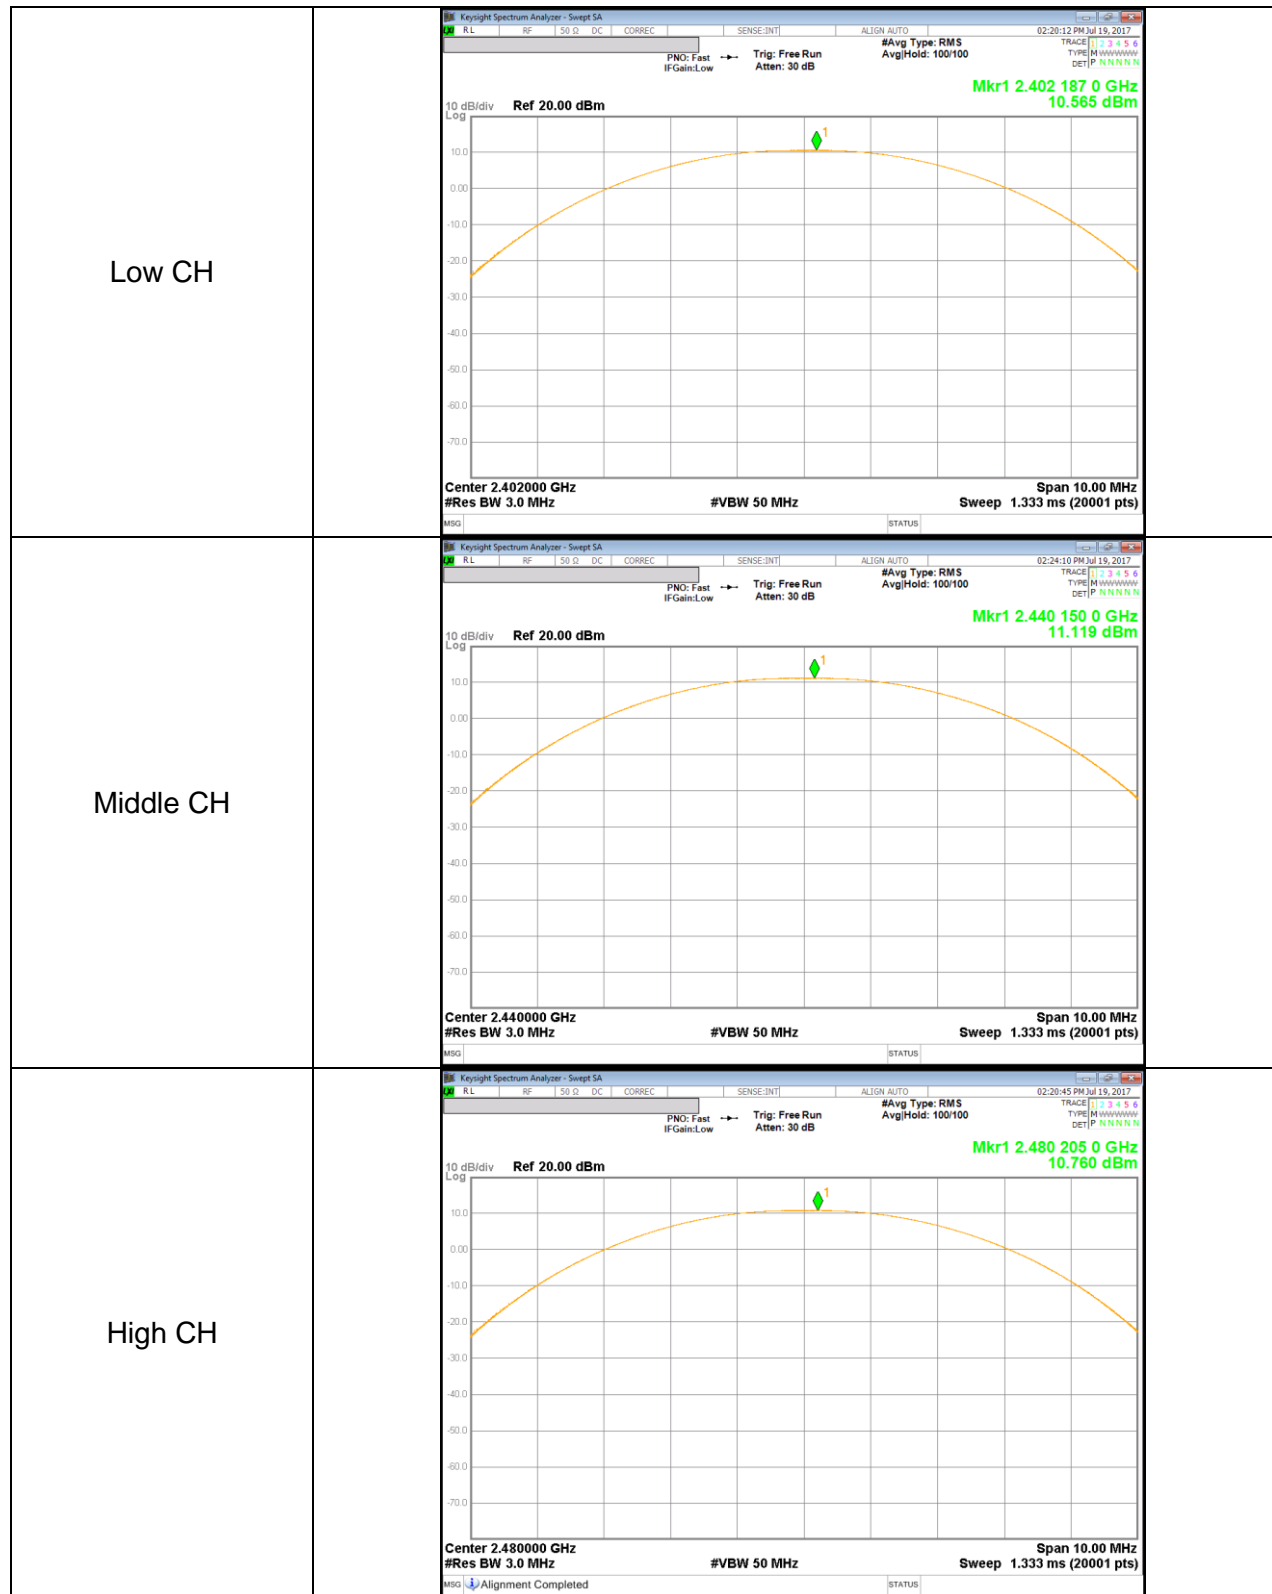

9.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss was entered as an offset in the power meter to allow for direct reading of power.

| Channel | Frequency [MHz] | AV power [dBm] | AV power [mW] |
|---------|-----------------|----------------|---------------|
| Low | 2402 | 10.278 | 10.661 |
| Middle | 2440 | 10.850 | 12.162 |
| High | 2480 | 10.520 | 11.272 |

9.4. PSD

LIMITS

FCC §15.247

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


TEST PROCEDURE

Power Spectral Density was performed utilizing the “§10.2 Method PKPSD (Peak PSD)” under KDB558074 D01 DTS Meas Guidance v04

RESULTS

| Channel | Frequency [MHz] | PSD [dBm] | Limit [dBm] | Margin [dB] |
|---------|-----------------|-----------|-------------|-------------|
| Low | 2402 | -4.85 | 8.00 | -12.85 |
| Mid | 2440 | -4.41 | 8.00 | -12.41 |
| High | 2480 | -4.85 | 8.00 | -12.85 |

POWER SPECTRAL DENSITY PLOTS

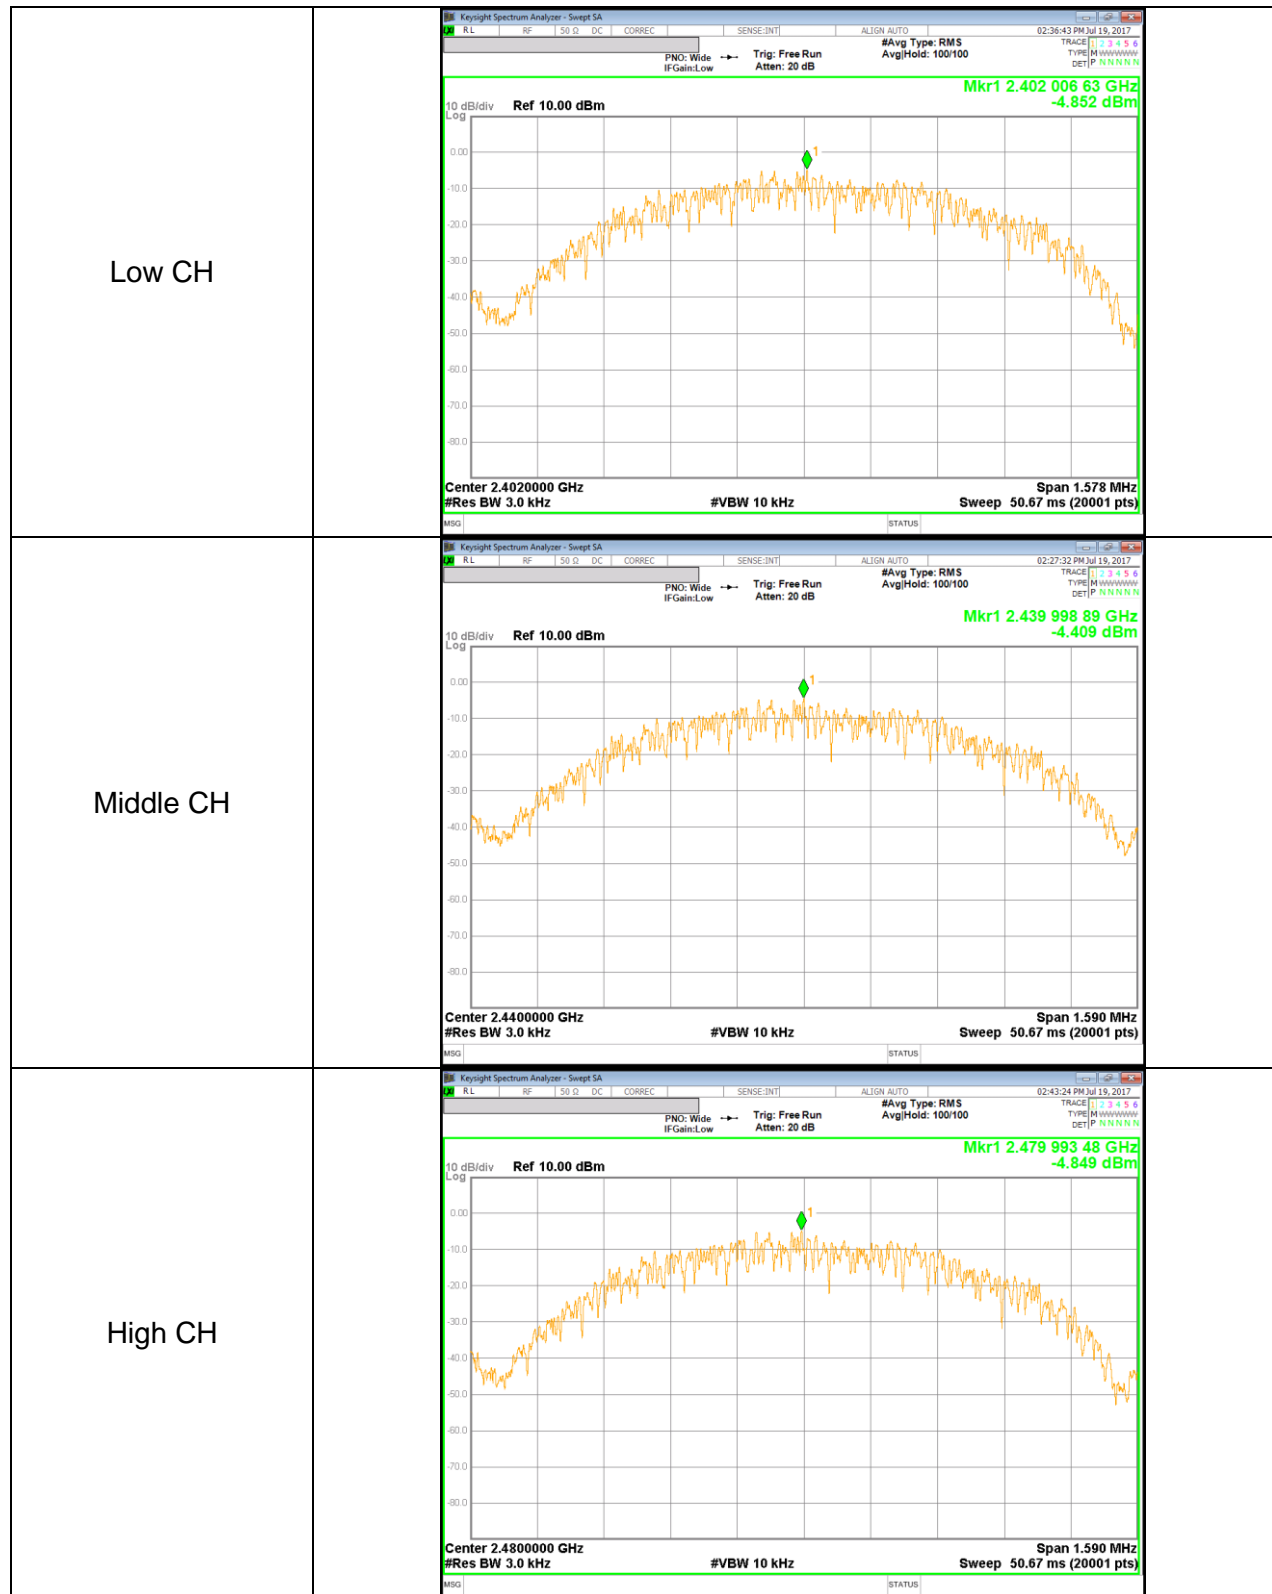

9.5. OUT-OF-BAND EMISSIONS

LIMITS

FCC §15.247 (d)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer with RBW = 100 kHz, VBW = 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, bandedge (where measurements to the general radiated limits will not be made) and out-of-band emissions.

RESULTS


BANDEDGE & SPURIOUS EMISSIONS, LOW CHANNEL

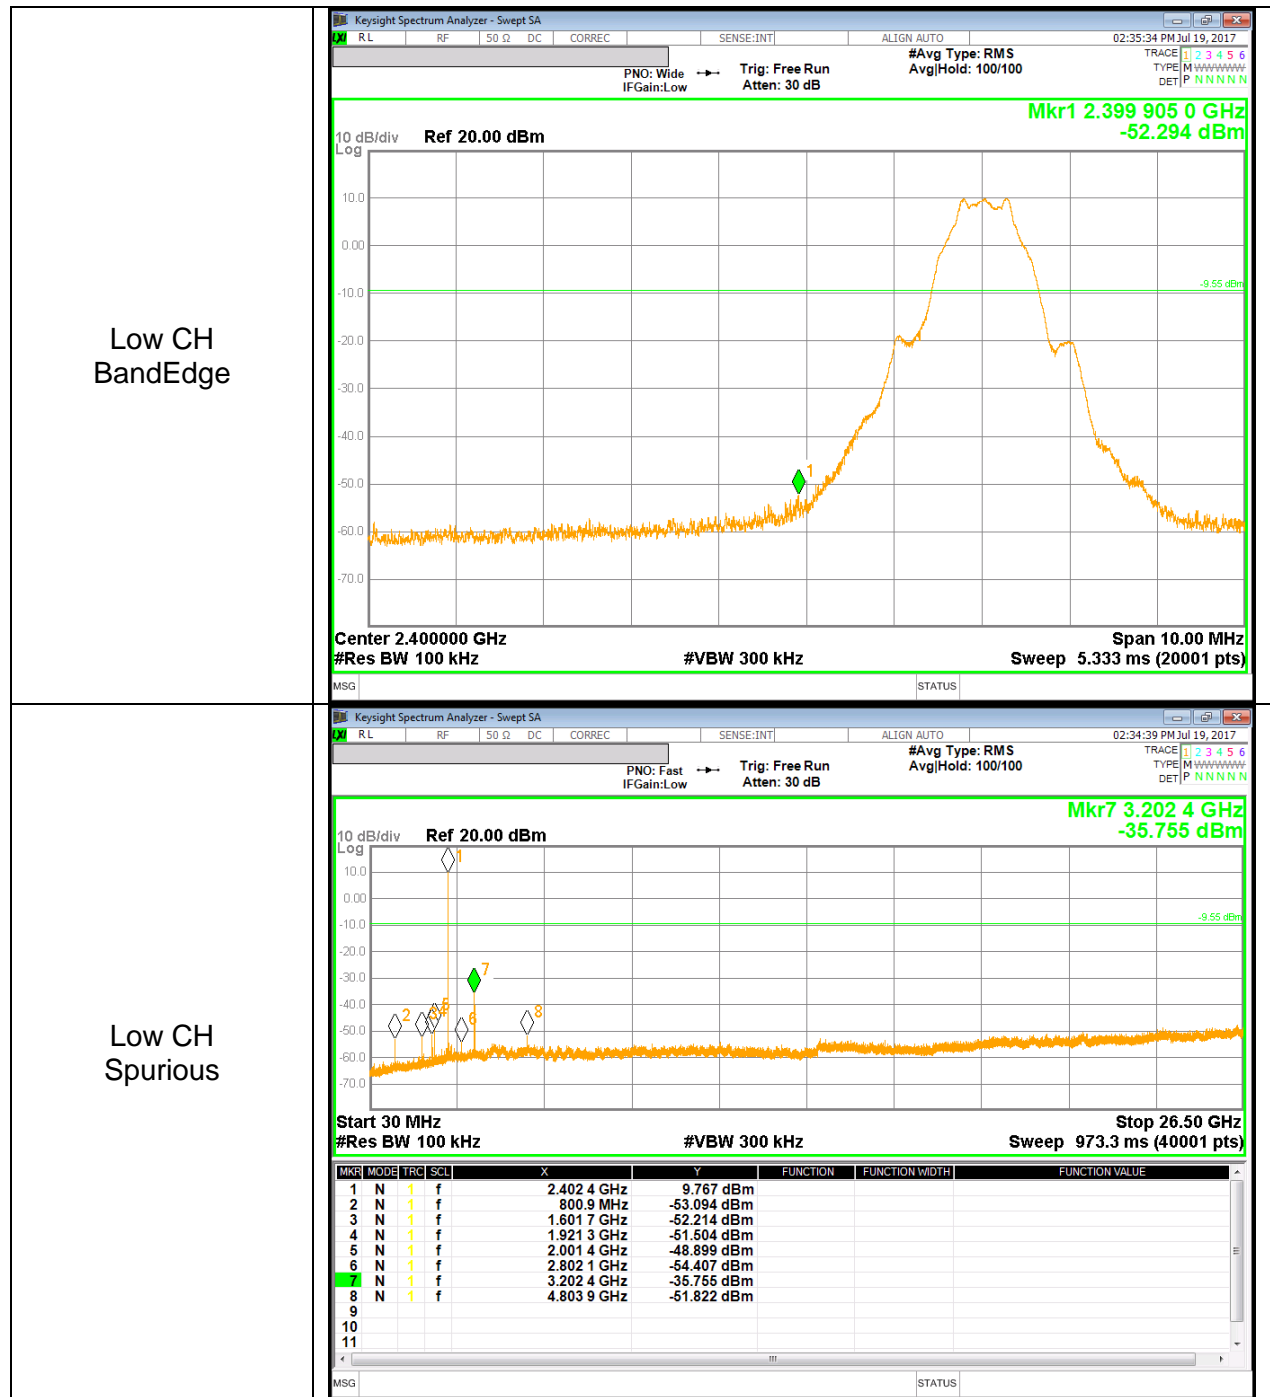

SPURIOUS EMISSIONS, MID CHANNEL

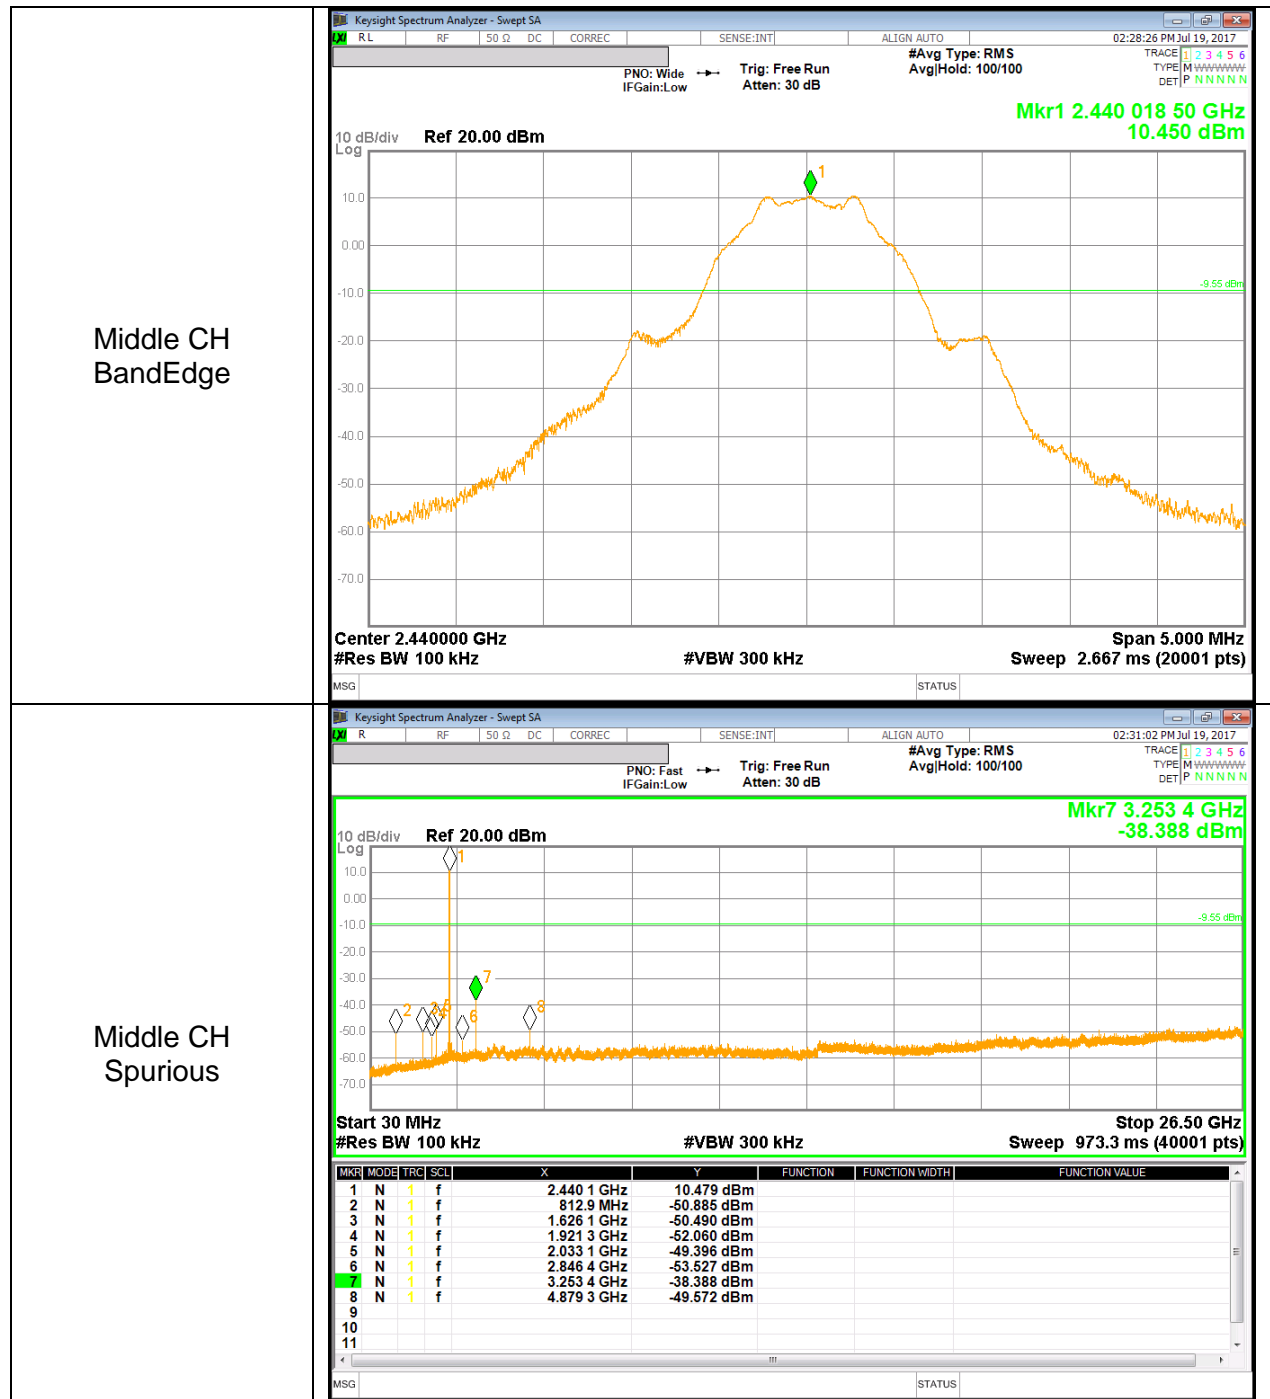

SPURIOUS EMISSIONS, HIGH CHANNEL

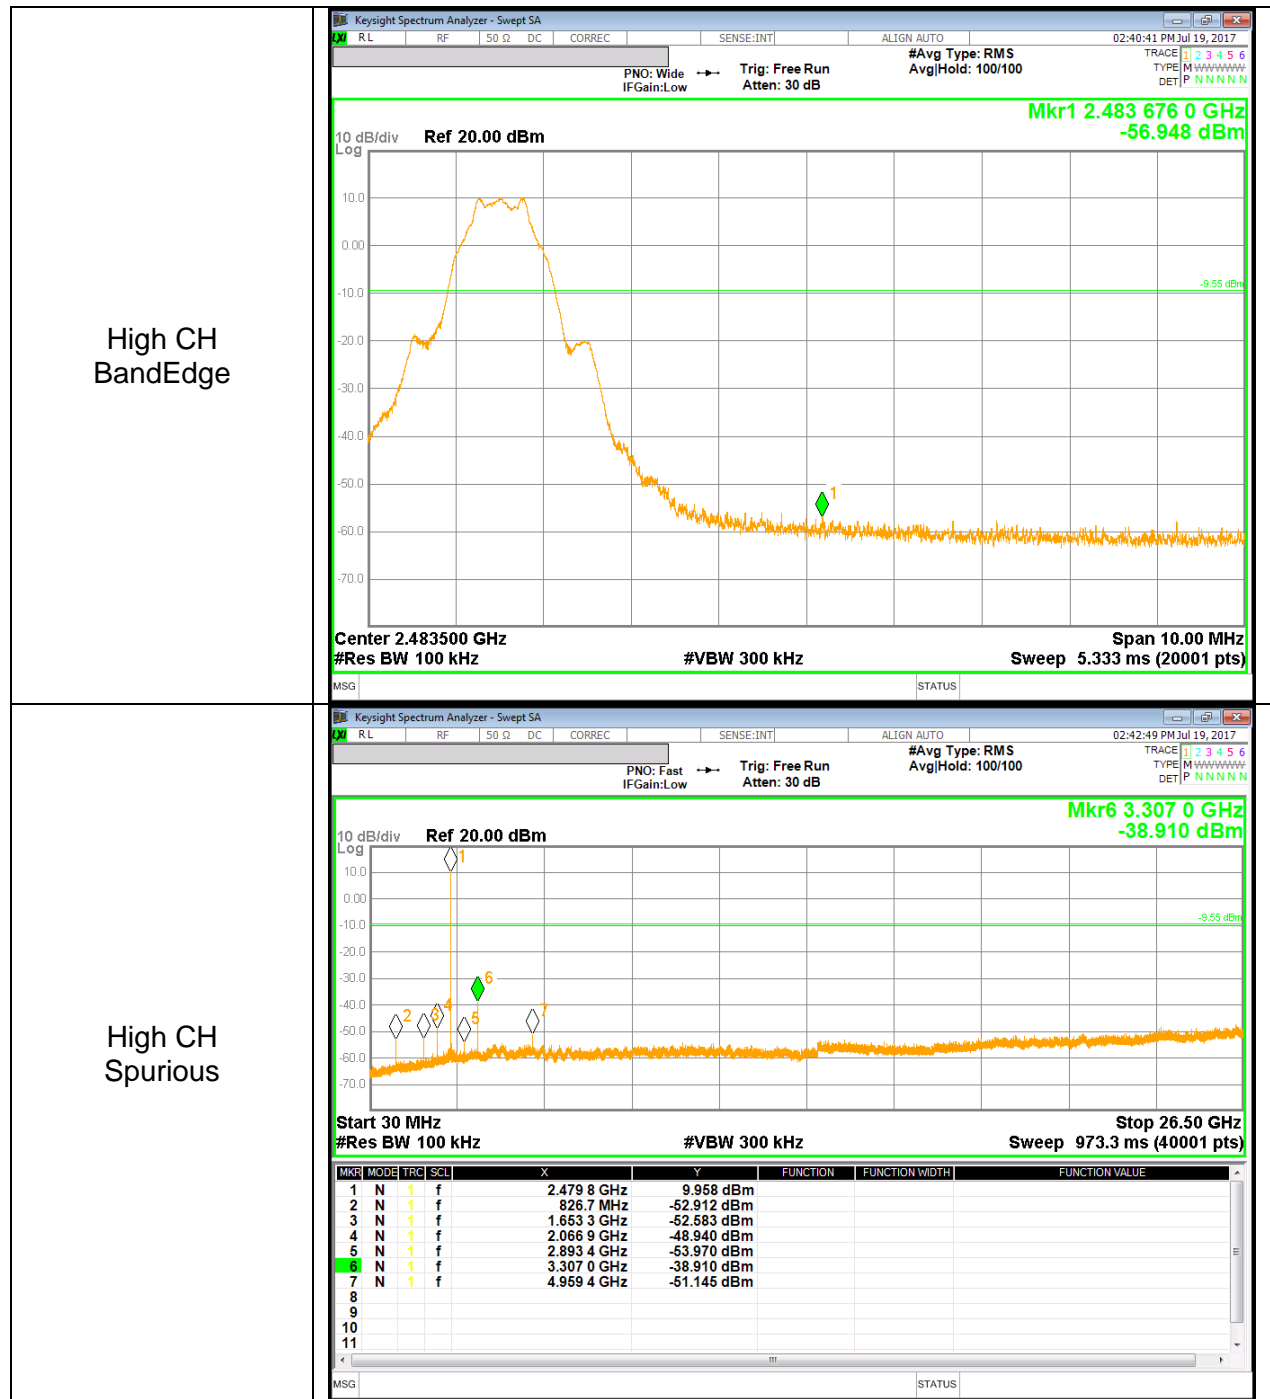

10. RADIATED TEST RESULTS

10.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

| Limits for radiated disturbance of an intentional radiator | | |
|--|-----------------|--------------------------|
| Frequency range (MHz) | Limits (µV/m) | Measurement Distance (m) |
| 0.009 – 0.490 | 2400 / F (kHz) | 300 |
| 0.490 – 1.705 | 24000 / F (kHz) | 30 |
| 1.705 – 30.0 | 30 | 30 |
| 30 – 88 | 100** | 3 |
| 88 - 216 | 150** | 3 |
| 216 – 960 | 200** | 3 |
| Above 960 | 500 | 3 |

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor for average measurements. (Restricted bandedge, Final detection of spurious harmonic emissions) Duty cycle factor = $10 \log(1/x)$. For this sample: $DCF = 10 \log(1/0.604) = 2.19 \text{dB}$ (Spectrum Analyzer round it up to 2.19dB)

Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.

The spectrum from 1 GHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.
(From 30MHz to 1GHz, test was performed with the EUT set to transmit at the channel with highest output power)

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


Unwanted emissions within Restricted Bands are measured using traditional radiated procedures.

Band edge emissions within Restricted Bands are measured using RMS with duty cycle factor offset method.

Note : Emission was pre-scanned from 9KHz to 30MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).
Per FCC part 15.31(o), test results were not reported.

10.2. TRANSMITTER ABOVE 1 GHz RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

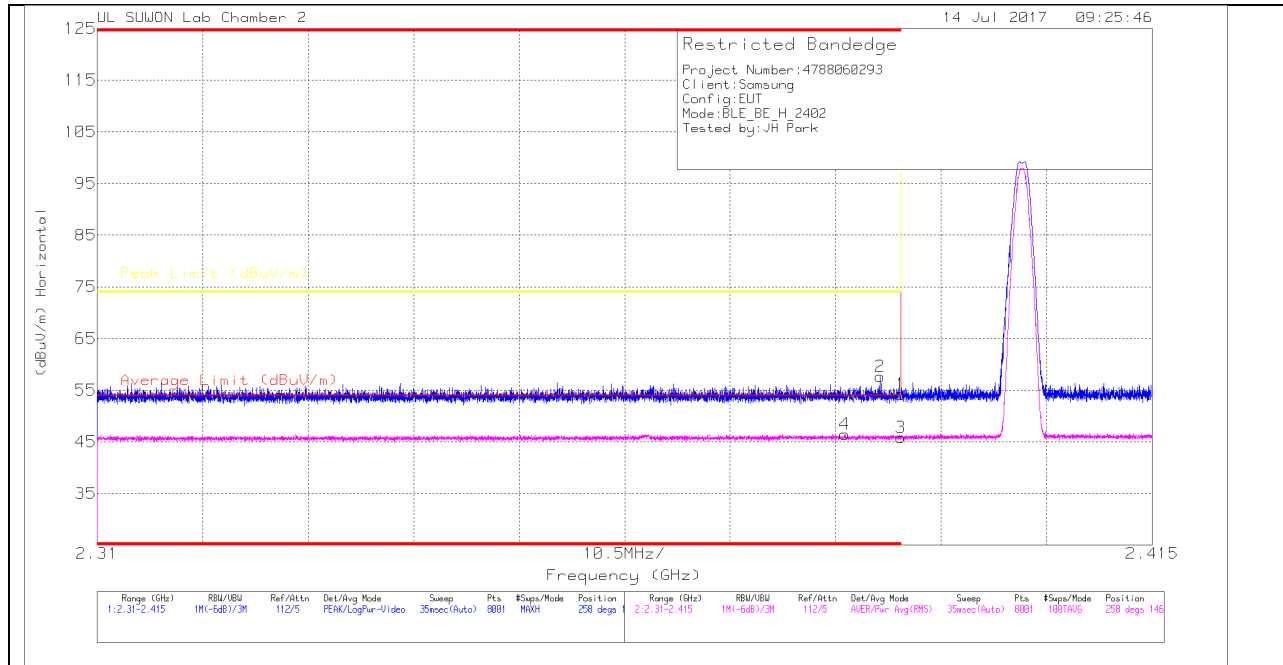

HORIZONTAL DATA

Trace Markers


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | 170531_3117 [00168724] | 10dB(dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|------------------------|----------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 2.39 | 41.1 | PK | 31.3 | -18.2 | 0 | 54.2 | - | - | 74 | -19.8 | 258 | 146 | H |
| 2 | * 2.388 | 44.56 | PK | 31.3 | -18.2 | 0 | 57.66 | - | - | 74 | -16.34 | 258 | 146 | H |
| 3 | * 2.39 | 30.58 | RMS | 31.3 | -18.2 | 2.19 | 45.87 | 54 | -8.13 | - | - | 258 | 146 | H |
| 4 | * 2.384 | 31.21 | RMS | 31.3 | -18.2 | 2.19 | 46.5 | 54 | -7.5 | - | - | 258 | 146 | H |

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

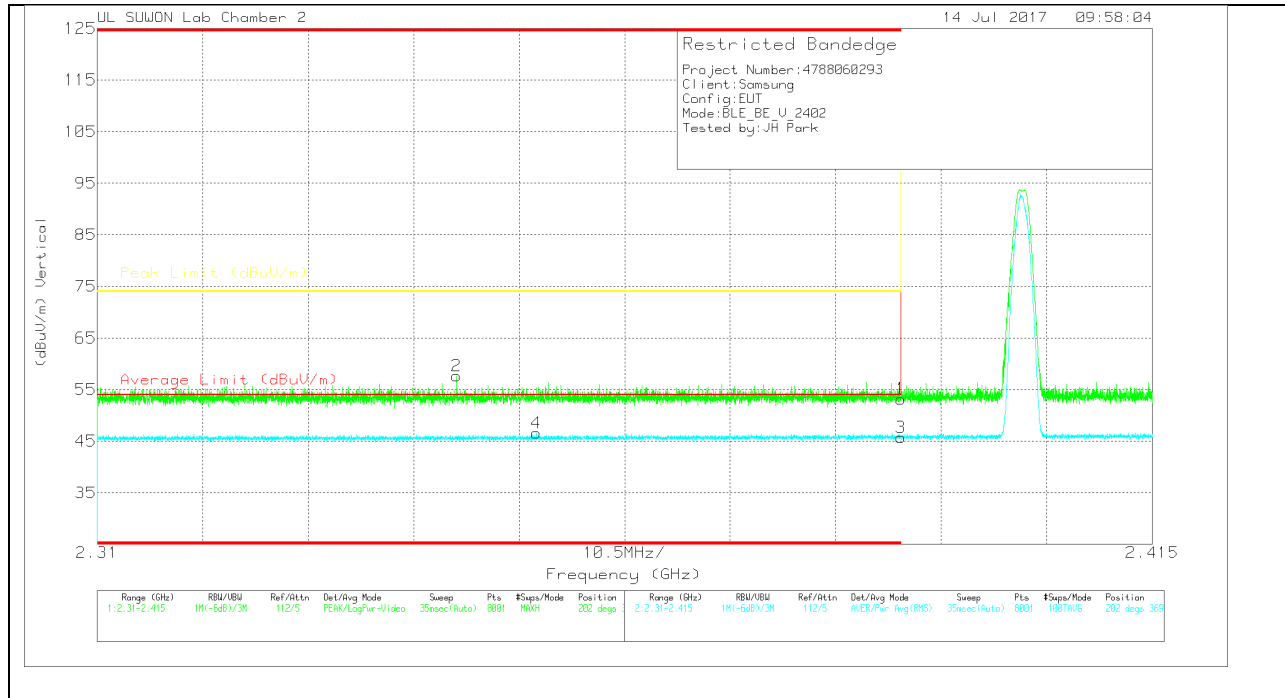

VERTICAL DATA

Trace Markers

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | 170531_3117 [00168724] | 10dB(dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|------------------------|----------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 2.39 | 40.12 | Pk | 31.3 | -18.2 | 0 | 53.22 | - | - | 74 | -20.78 | 202 | 369 | V |
| 2 | * 2.346 | 44.73 | Pk | 31.2 | -18.3 | 0 | 57.63 | - | - | 74 | -16.37 | 202 | 369 | V |
| 3 | * 2.39 | 30.44 | RMS | 31.3 | -18.2 | 2.19 | 45.73 | 54 | -8.27 | - | - | 202 | 369 | V |
| 4 | * 2.354 | 31.5 | RMS | 31.2 | -18.3 | 2.19 | 46.59 | 54 | -7.41 | - | - | 202 | 369 | V |


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

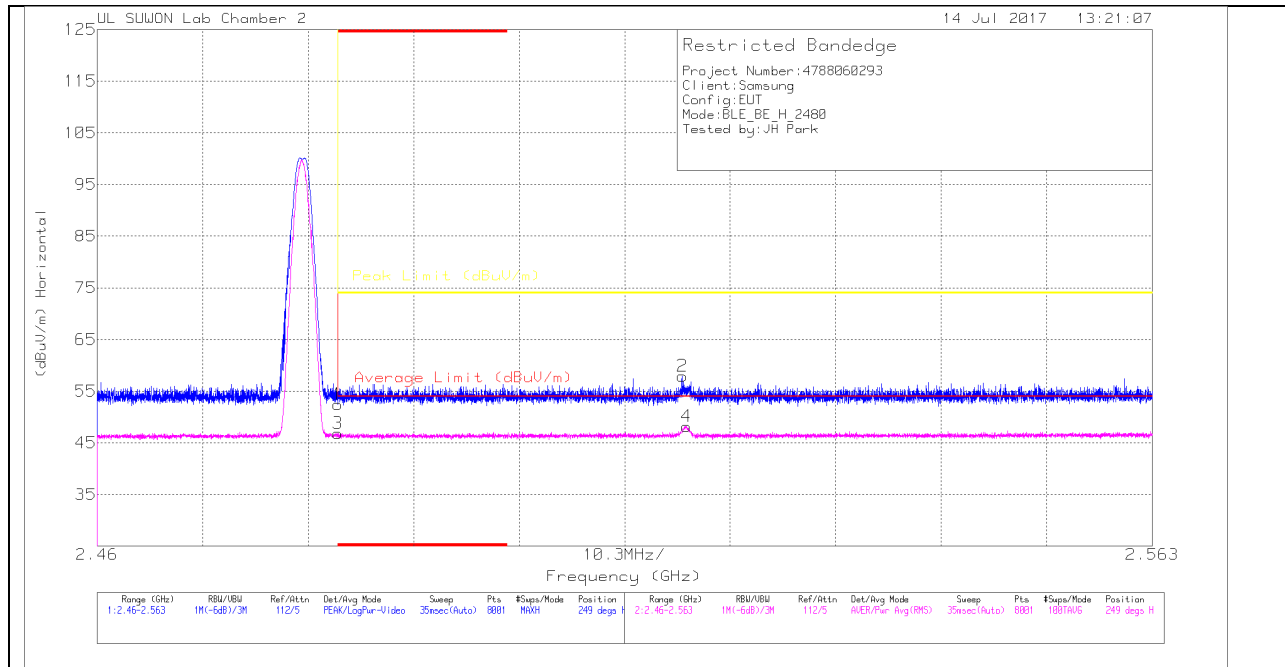

HORIZONTAL DATA

Trace Markers


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | 170531_3117 [00168724] | 10dB(dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|------------------------|----------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 2.484 | 38.86 | Pk | | -18 | 0 | 52.46 | - | - | 74 | -21.54 | 249 | 274 | H |
| 2 | 2.517 | 44.33 | Pk | | -18 | 0 | 57.93 | - | - | 74 | -16.07 | 249 | 274 | H |
| 3 | * 2.484 | 31.06 | RMS | | -18 | 2.19 | 46.85 | 54 | -7.15 | - | - | 249 | 274 | H |
| 4 | 2.518 | 32.4 | RMS | | -18 | 2.19 | 48.19 | 54 | -5.81 | - | - | 249 | 274 | H |

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

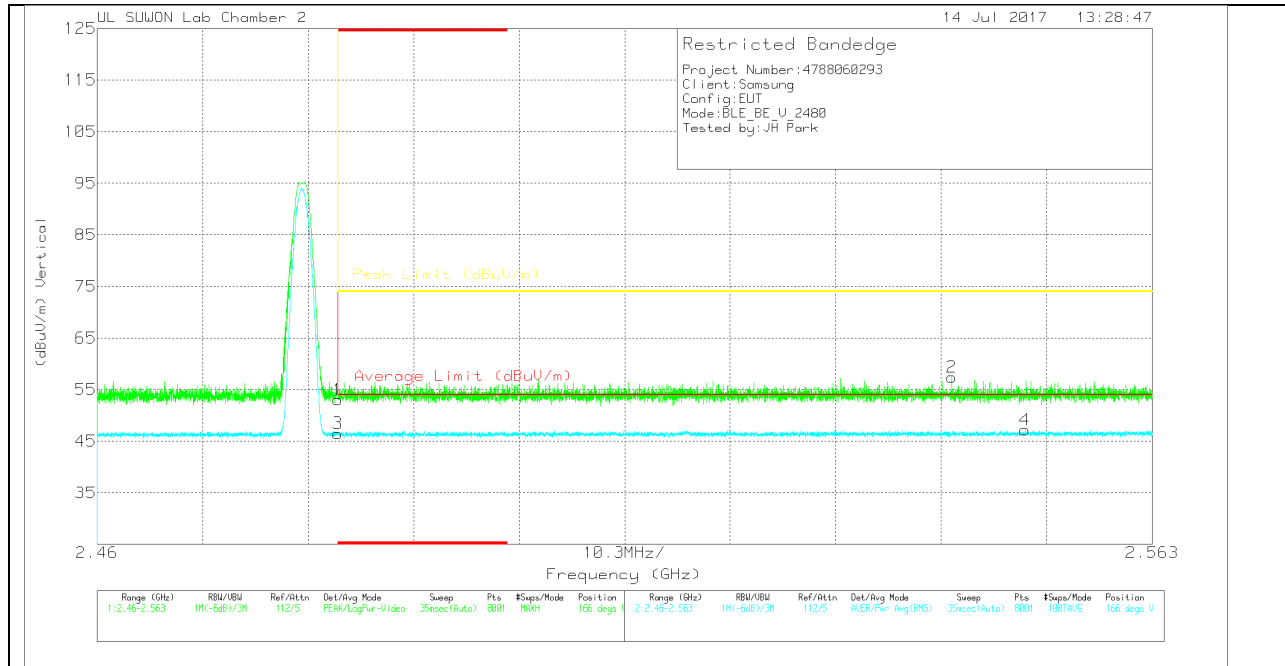

VERTICAL DATA

Trace Markers

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | 170531_3117 [00168724] | 10dB[dB] | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|------------------------|----------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1 | * 2.484 | 39.41 | Pk | 31.6 | -18 | 0 | 53.01 | - | - | 74 | -20.99 | 166 | 395 | V |
| 2 | 2.543 | 43.7 | Pk | 31.7 | -18 | 0 | 57.4 | - | - | 74 | -16.6 | 166 | 395 | V |
| 3 | * 2.484 | 30.71 | RMS | 31.6 | -18 | 2.19 | 46.5 | 54 | -7.5 | - | - | 166 | 395 | V |
| 4 | 2.551 | 31.28 | RMS | 31.7 | -18 | 2.19 | 47.17 | 54 | -6.83 | - | - | 166 | 395 | V |


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

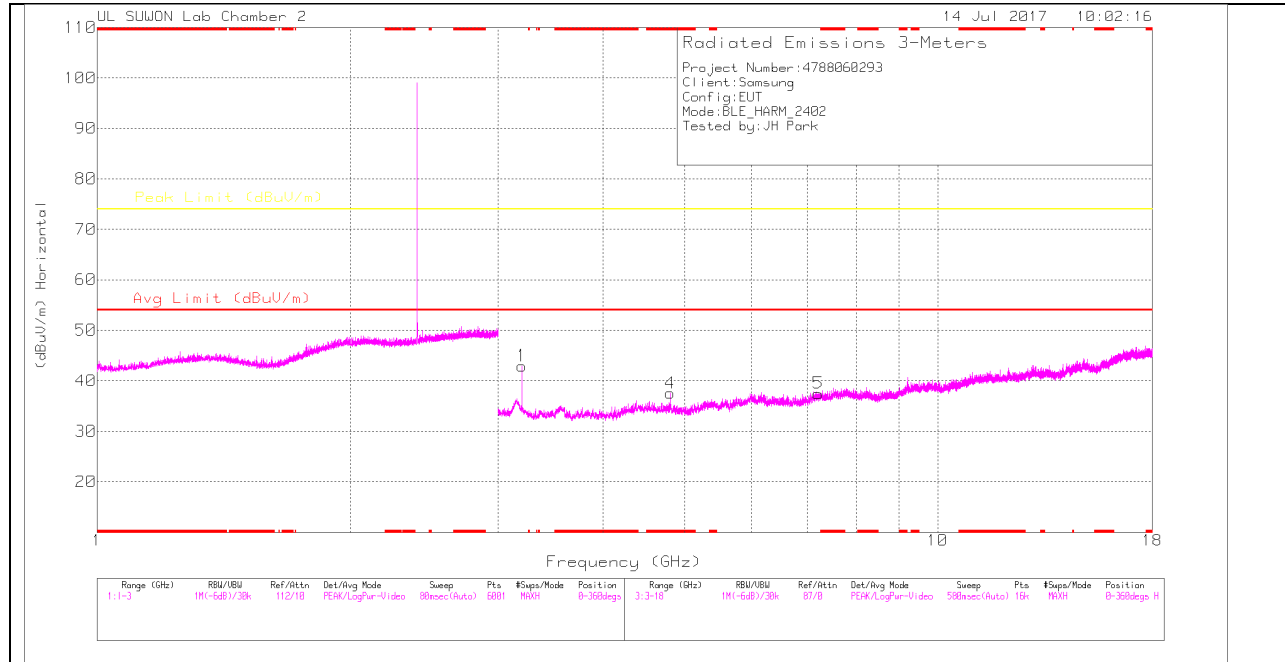

LOW CHANNEL VERTICAL

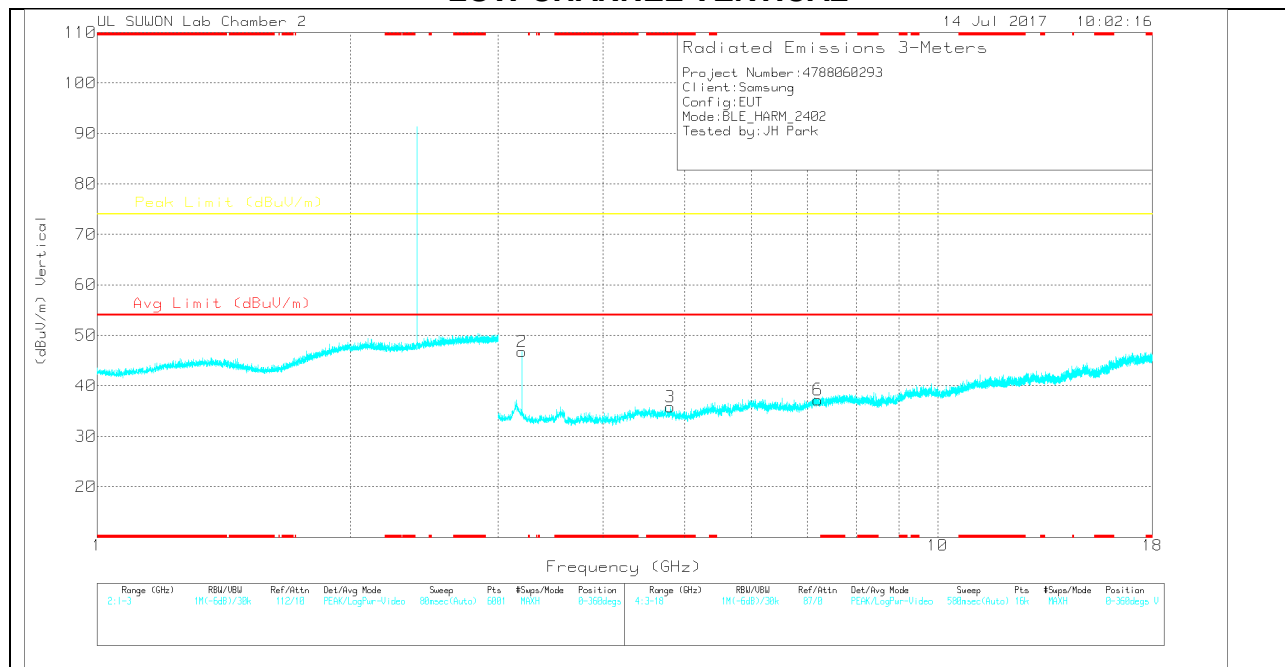

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | 170531_3117 [00168724] | 3GHz_HP[dB] | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|------------------------|-------------|--------------|----------------------------|--------------------|-------------|---------------------|-------------|----------------|-------------|----------|
| 1 | 3.202 | 35.25 | PK | 33.4 | -25.7 | 0 | 42.95 | - | - | 74 | -31.05 | 0-360 | 150 | H |
| 4 | * 4.804 | 28.05 | PK | 33.8 | -24.3 | 0 | 37.55 | - | - | 74 | -36.45 | 0-360 | 250 | H |
| 5 | 7.208 | 23.29 | PK | 35.9 | -21.7 | 0 | 37.49 | - | - | 74 | -36.51 | 0-360 | 150 | H |
| 2 | 3.202 | 39.03 | PK | 33.4 | -25.7 | 0 | 46.73 | - | - | 74 | -27.27 | 0-360 | 150 | V |
| 3 | * 4.804 | 26.3 | PK | 33.8 | -24.3 | 0 | 35.8 | - | - | 74 | -38.2 | 0-360 | 150 | V |
| 6 | 7.203 | 22.91 | PK | 35.9 | -21.6 | 0 | 37.21 | - | - | 74 | -36.79 | 0-360 | 150 | V |

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak Detector

Radiated Emissions


| Frequency (GHz) | Meter Reading (dBuV) | Det | 170531_3117 [00168724] | 3GHz_HP[dB] | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|------------------------|-------------|--------------|----------------------------|--------------------|-------------|---------------------|-------------|----------------|-------------|----------|
| 3.203 | 41.91 | PK2 | 33.4 | -25.7 | 0 | 49.61 | - | - | 74 | -24.39 | 254 | 235 | H |
| 3.203 | 43.83 | PK2 | 33.4 | -25.7 | 0 | 51.53 | - | - | 74 | -22.47 | 176 | 159 | V |
| * 4.803 | 36.47 | PK2 | 33.8 | -24.3 | 0 | 45.97 | - | - | 74 | -28.03 | 54 | 309 | V |
| * 4.804 | 24.68 | MAv1 | 33.8 | -24.3 | 2.19 | 36.37 | 54 | -17.63 | - | - | 54 | 309 | V |
| * 4.804 | 37.24 | PK2 | 33.8 | -24.3 | 0 | 46.74 | - | - | 74 | -27.26 | 165 | 169 | H |
| * 4.804 | 26 | MAv1 | 33.8 | -24.3 | 2.19 | 37.69 | 54 | -16.31 | - | - | 165 | 169 | H |

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL HORIZONTAL

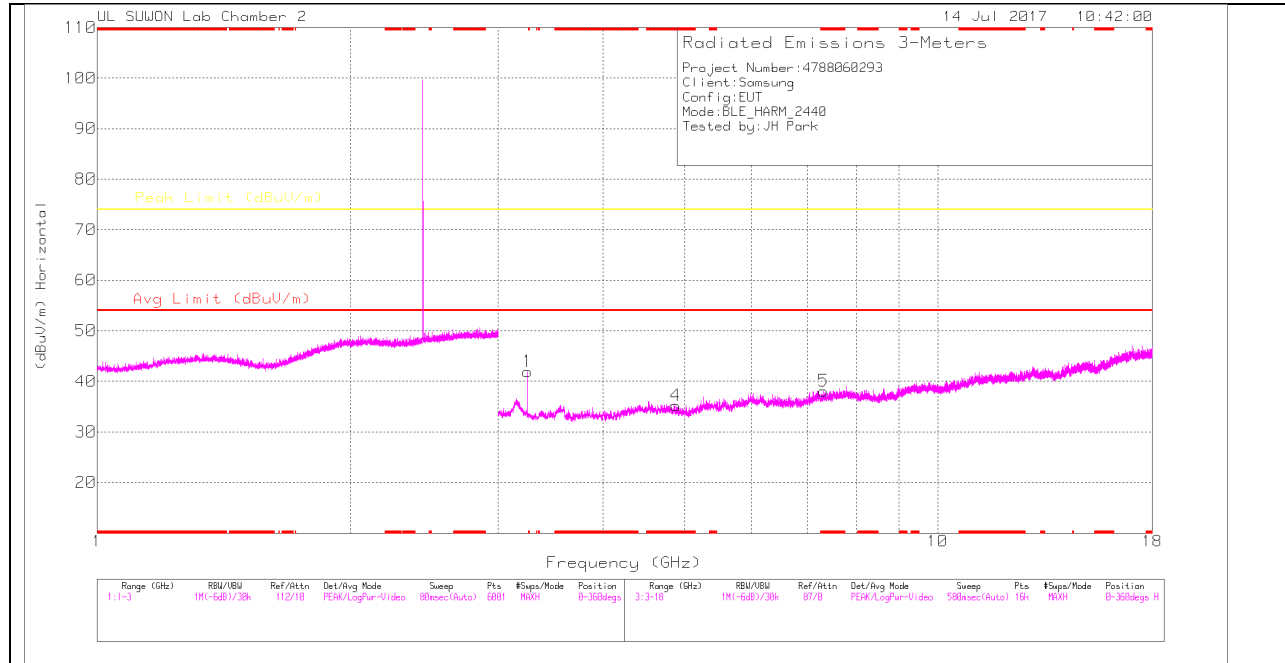

MID CHANNEL VERTICAL

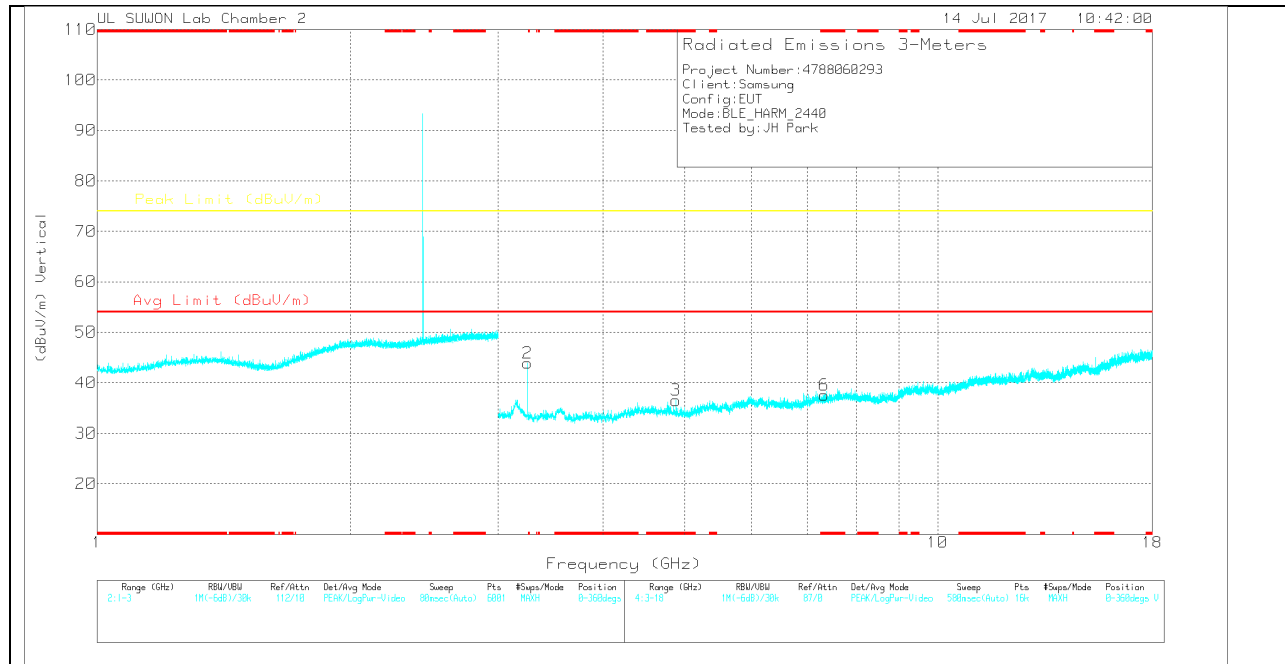

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | 170531_3117 [00168724] | 3GHz_HP[dB] | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|------------------------|-------------|--------------|----------------------------|--------------------|-------------|---------------------|-------------|----------------|-------------|----------|
| 1 | 3.253 | 35.26 | PK | 32.7 | -26 | 0 | 41.96 | - | - | 74 | -32.04 | 0-360 | 250 | H |
| 4 | * 4.88 | 26.03 | PK | 33.8 | -24.6 | 0 | 35.23 | - | - | 74 | -38.77 | 0-360 | 150 | H |
| 5 | * 7.32 | 24.2 | PK | 35.9 | -22 | 0 | 38.1 | - | - | 74 | -35.9 | 0-360 | 150 | H |
| 2 | 3.253 | 37.18 | PK | 32.7 | -26 | 0 | 43.88 | - | - | 74 | -30.12 | 0-360 | 150 | V |
| 3 | * 4.88 | 27.31 | PK | 33.8 | -24.6 | 0 | 36.51 | - | - | 74 | -37.49 | 0-360 | 150 | V |
| 6 | * 7.324 | 23.55 | PK | 35.9 | -21.9 | 0 | 37.55 | - | - | 74 | -36.45 | 0-360 | 250 | V |

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak Detector


Radiated Emissions

| Frequency (GHz) | Meter Reading (dBuV) | Det | 170531_3117 [00168724] | 3GHz_HP[dB] | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|-----|------------------------|-------------|--------------|----------------------------|--------------------|-------------|---------------------|-------------|----------------|-------------|----------|
| 3.254 | 41.53 | PK2 | 32.7 | -26 | 0 | 48.23 | - | - | 74 | -25.77 | 275 | 247 | H |
| 3.253 | 43.35 | PK2 | 32.7 | -26 | 0 | 50.05 | - | - | 74 | -23.95 | 189 | 102 | V |


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK2 - KDB558074 Method: Maximum Peak

HIGH CHANNEL HORIZONTAL

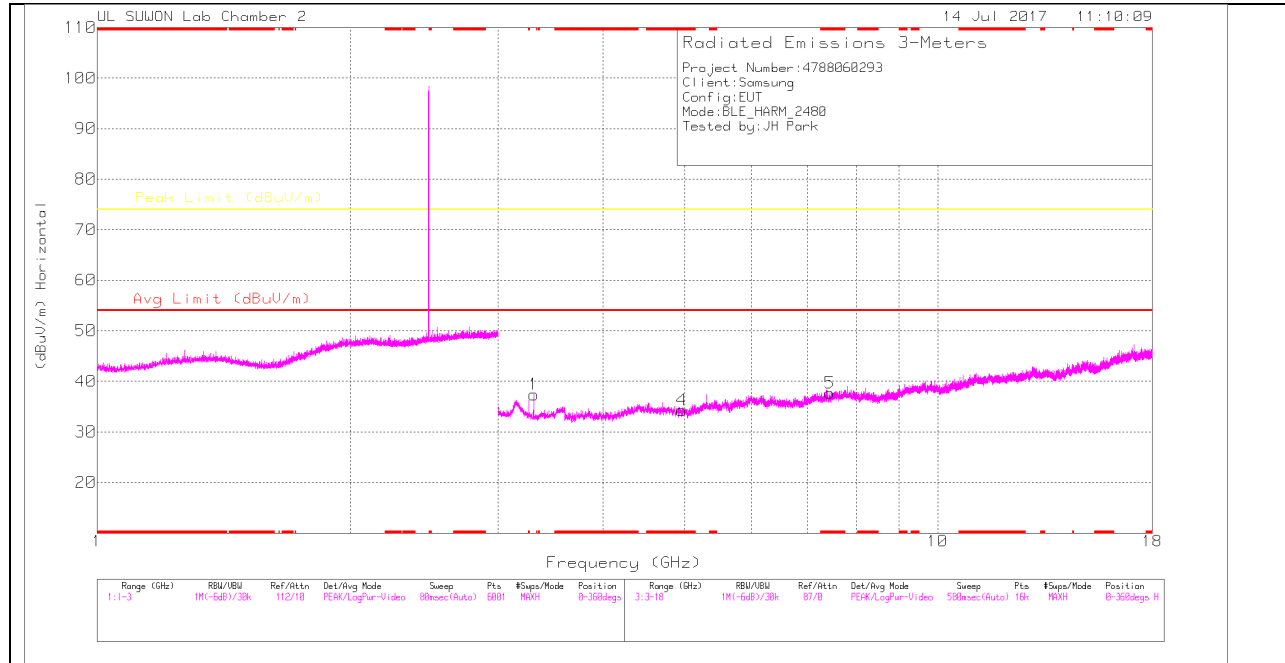

HIGH CHANNEL VERTICAL

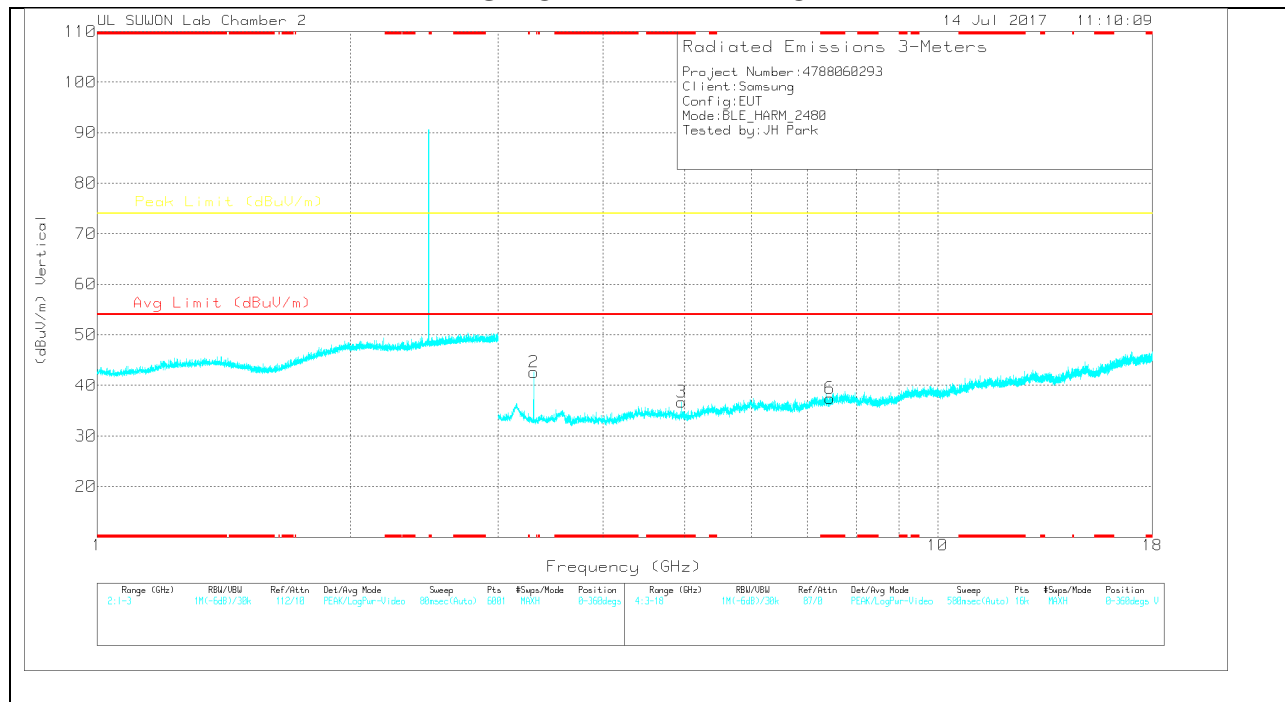

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | 170531_3117 [00168724] | 3GHz_HP[dB] | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|------------------------|-------------|--------------|----------------------------|--------------------|-------------|---------------------|-------------|----------------|-------------|----------|
| 1 | 3.307 | 30.68 | PK | 32.5 | -25.8 | 0 | 37.38 | - | - | 74 | -36.62 | 0-360 | 150 | H |
| 4 | * 4.962 | 25.17 | PK | 33.8 | -24.7 | 0 | 34.27 | - | - | 74 | -39.73 | 0-360 | 250 | H |
| 5 | * 7.439 | 22.78 | PK | 35.9 | -21 | 0 | 37.68 | - | - | 74 | -36.32 | 0-360 | 150 | H |
| 2 | 3.307 | 35.91 | PK | 32.5 | -25.8 | 0 | 42.61 | - | - | 74 | -31.39 | 0-360 | 149 | V |
| 3 | * 4.96 | 27.62 | PK | 33.8 | -24.7 | 0 | 36.72 | - | - | 74 | -37.28 | 0-360 | 149 | V |
| 6 | * 7.438 | 22.56 | PK | 35.9 | -21 | 0 | 37.46 | - | - | 74 | -36.54 | 0-360 | 149 | V |

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak Detector

Radiated Emissions

| Frequency (GHz) | Meter Reading (dBuV) | Det | 170531_3117 [00168724] | 3GHz_HP[dB] | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|------------------------|-------------|--------------|----------------------------|--------------------|-------------|---------------------|-------------|----------------|-------------|----------|
| 3.307 | 39.36 | PK2 | 32.5 | -25.8 | 0 | 46.06 | - | - | 74 | -27.94 | 255 | 276 | H |
| 3.307 | 41.76 | PK2 | 32.5 | -25.8 | 0 | 48.46 | - | - | 74 | -25.54 | 210 | 158 | V |
| * 4.958 | 36.1 | PK2 | 33.8 | -24.7 | 0 | 45.2 | - | - | 74 | -28.8 | 145 | 106 | V |
| * 4.958 | 21.89 | MAv1 | 33.8 | -24.7 | 0 | 30.99 | 54 | -23.01 | - | - | 145 | 106 | V |

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average


10.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

HORIZONTAL PLOT

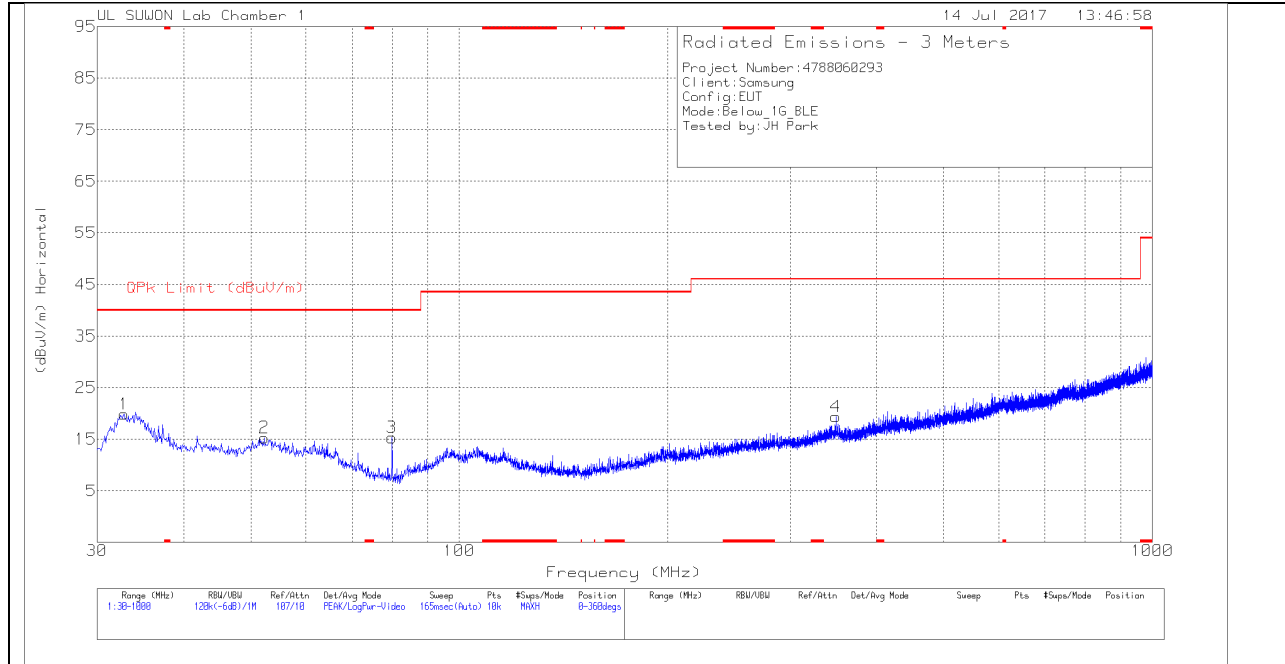

VERTICAL PLOT

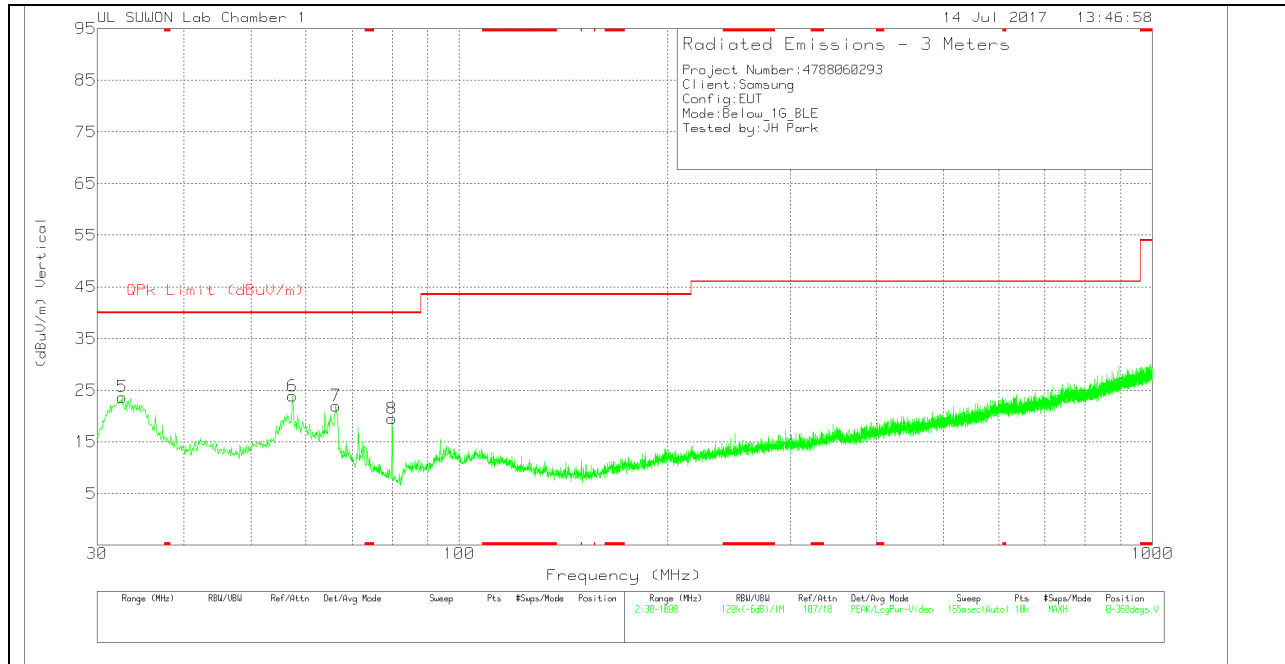

BELOW 1 GHz TABLE

Trace Markers

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | VULB9163_7 50(dB) | 30-1000MHz[dB] | Corrected Reading (dBuV/m) | QPk Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|-------------------|-----------------|----------------------------|--------------------|-------------|----------------|-------------|----------|
| 1 | 32.813 | 38.98 | Pk | 10.5 | -29.6 | 19.88 | 40 | -20.12 | 0-360 | 200 | H |
| 2 | 52.31 | 30.6 | Pk | 13.8 | -29.1 | 15.3 | 40 | -24.7 | 0-360 | 300 | H |
| 3 | 79.955 | 37.03 | Pk | 7 | -28.7 | 15.33 | 40 | -24.67 | 0-360 | 400 | H |
| 4 | 349.421 | 30.96 | Pk | 15 | -26.6 | 19.36 | 46.02 | -26.66 | 0-360 | 100 | H |
| 5 | 32.619 | 42.8 | Pk | 10.5 | -29.6 | 23.7 | 40 | -16.3 | 0-360 | 100 | V |
| 6 | 57.451 | 39.98 | Pk | 13.1 | -29.2 | 23.88 | 40 | -16.12 | 0-360 | 100 | V |
| 7 | 66.375 | 40.09 | Pk | 10.8 | -28.9 | 21.99 | 40 | -18.01 | 0-360 | 200 | V |
| 8 | 79.955 | 41.2 | Pk | 7 | -28.7 | 19.5 | 40 | -20.5 | 0-360 | 100 | V |

Pk - Peak detector