

Bluetooth

Frequency: 2480 MHz; Duty Cycle: 1:1.29033; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 38.426$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn912; Calibrated: 2016-11-18
- Probe: EX3DV4 - SN7314; ConvF(7.42, 7.42, 7.42); Calibrated: 2016-09-27;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM Phantom CRP v5.0(Middle); Type: QD000P40CD; Serial: TP:1854

Bluetooth GFSK_ ch 78 front/Area Scan (8x5x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0453 W/kg


Bluetooth GFSK_ ch 78 front/Zoom Scan (8x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.687 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.132 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.00854 W/kg

Maximum value of SAR (measured) = 0.0495 W/kg

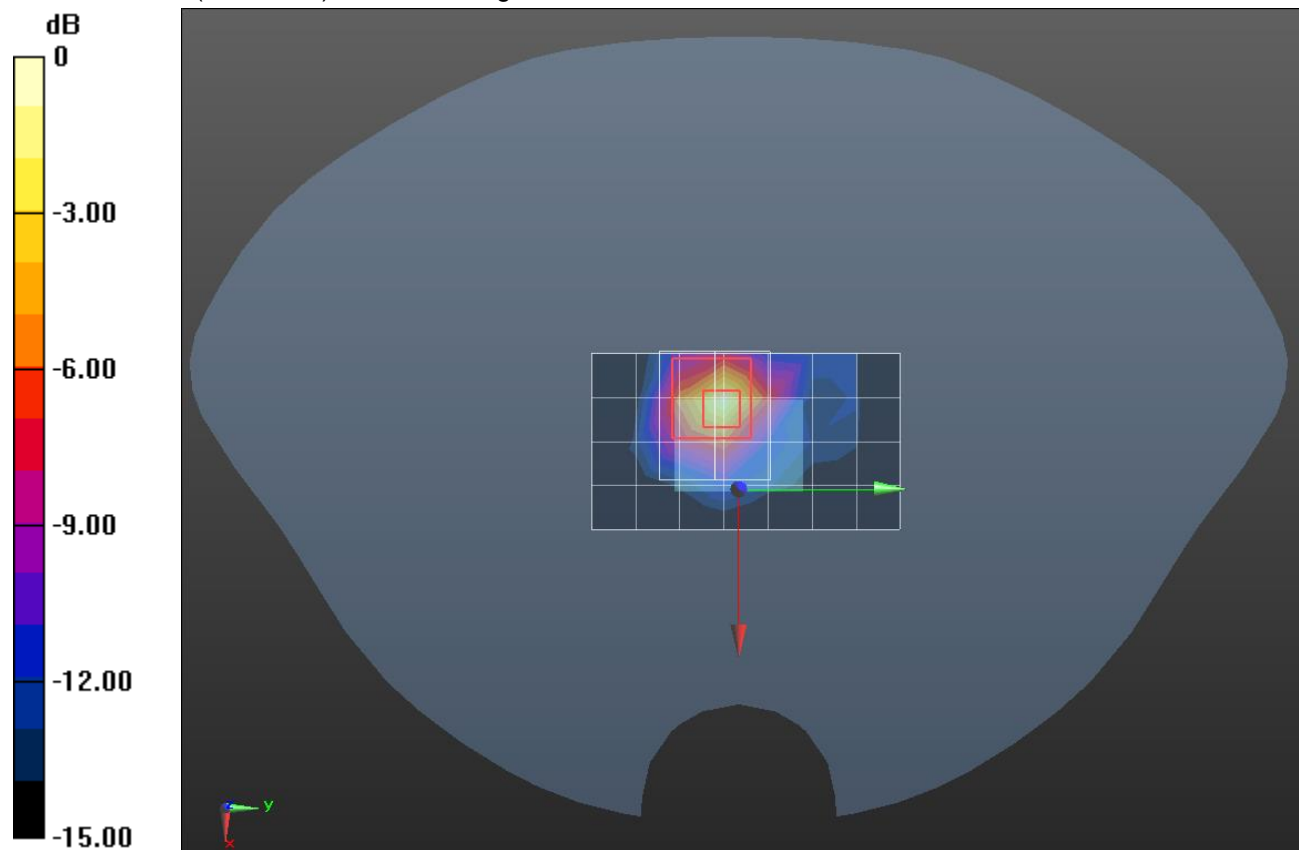

0 dB = 0.0495 W/kg = -13.05 dBW/kg