



**FCC CFR47 PART 15 SUBPART C**

**DTS Wireless LAN**

**CERTIFICATION TEST REPORT**

**FOR**

**WCDMA/LTE Watch + Bluetooth/BLE and DTS b/g/n**

**MODEL NUMBER : SM-R765T, SM-R765A**

**FCC ID: A3LSMR765U**

**REPORT NUMBER: 16K23793-E1V2**

**ISSUE DATE: SEP 02 , 2016**

*Prepared for*

**SAMSUNG ELECTRONICS CO., LTD.  
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,  
GYEONGGI-DO, 16677, KOREA**

*Prepared by*

**UL Korea, Ltd. Suwon Laboratory  
218 Maeyeong-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16675, Korea  
TEL: (031) 337-9902  
FAX: (031) 213-5433**



---

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	08/29/16	Initial issue	Junwhan Lee
V2	09/02/16	Revised section 5.4, 6, 11.1	Junwhan Lee

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b> .....	<b>5</b>
<b>2. TEST METHODOLOGY</b> .....	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION</b> .....	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY</b> .....	<b>6</b>
4.1. MEASURING INSTRUMENT CALIBRATION.....	6
4.2. SAMPLE CALCULATION.....	6
4.3. MEASUREMENT UNCERTAINTY.....	7
<b>5. EQUIPMENT UNDER TEST</b> .....	<b>8</b>
5.1. DESCRIPTION OF EUT.....	8
5.2. MAXIMUM OUTPUT POWER.....	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS.....	8
5.4. WORST-CASE CONFIGURATION AND MODE.....	8
5.5. DESCRIPTION OF TEST SETUP.....	9
<b>6. TEST AND MEASUREMENT EQUIPMENT</b> .....	<b>11</b>
<b>7. MEASUREMENT METHODS</b> .....	<b>12</b>
<b>8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS</b> .....	<b>13</b>
8.1. ON TIME AND DUTY CYCLE RESULTS.....	13
<b>9. SUMMARY TABLE</b> .....	<b>15</b>
<b>10. ANTENNA PORT TEST RESULTS</b> .....	<b>16</b>
10.1. 6 dB BANDWIDTH.....	16
10.1.1. 802.11b MODE IN THE 2.4 GHz BAND.....	16
10.1.2. 802.11g MODE IN THE 2.4 GHz BAND.....	16
10.1.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND.....	16
10.1.4. 6 dB BANDWIDTH PLOTS.....	17
10.2. 99% BANDWIDTH.....	20
10.2.1. 802.11b MODE IN THE 2.4 GHz BAND.....	20
10.2.2. 802.11g MODE IN THE 2.4 GHz BAND.....	20
10.2.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND.....	20
10.2.4. 99% BANDWIDTH PLOTS.....	21
10.3. OUTPUT POWER.....	24
10.3.1. 802.11b MODE IN THE 2.4 GHz BAND.....	25
10.3.2. 802.11g MODE IN THE 2.4 GHz BAND.....	26
10.3.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND.....	27
10.4. PSD.....	28

---

10.4.1.	802.11b MODE IN THE 2.4 GHz BAND .....	29
10.4.2.	802.11g MODE IN THE 2.4 GHz BAND .....	29
10.4.3.	802.11n HT20 MODE IN THE 2.4 GHz BAND .....	29
10.4.4.	PSD PLOTS .....	30
10.5.	<i>OUT-OF-BAND EMISSIONS</i> .....	33
10.5.1.	802.11b MODE IN THE 2.4 GHz BAND .....	34
10.5.2.	802.11g MODE IN THE 2.4 GHz BAND .....	37
10.5.3.	802.11n HT20 MODE IN THE 2.4 GHz BAND .....	40
<b>11.</b>	<b>RADIATED TEST RESULTS</b> .....	<b>43</b>
11.1.	<i>LIMITS AND PROCEDURE</i> .....	43
11.2.	<i>TRANSMITTER ABOVE 1 GHz</i> .....	45
11.2.1.	TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND .....	45
11.2.2.	TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND .....	55
11.2.3.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 2.4 GHz BAND .....	65
11.3.	<i>WORST-CASE BELOW 1 GHz</i> .....	75
<b>12.</b>	<b>AC POWER LINE CONDUCTED EMISSIONS</b> .....	<b>77</b>
<b>13.</b>	<b>SETUP PHOTOS</b> .....	<b>80</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SAMSUNG ELECTRONICS CO., LTD.  
**EUT DESCRIPTION:** WCDMA/LTE Watch + Bluetooth/BLE and DTS b/g/n  
**MODEL NUMBER:** SM-R765T, SM-R765A  
**SERIAL NUMBER:** R3AH700KENB, R3AH700KEPA (RADIATED);  
R3AH700KESV (CONDUCTED)  
**DATE TESTED:** AUG 11, 2016 - AUG 24, 2016

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Korea, Ltd. By:



CY Choi  
Suwon Lab Engineer  
UL Korea, Ltd.

Tested By:



Junwhan Lee  
Suwon Lab Engineer  
UL Korea, Ltd.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, KDB 558074 D01 v03r05 and ANSI C63.10-2013.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro
<input checked="" type="checkbox"/> Chamber 1
<input type="checkbox"/> Chamber 2

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	4.14 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a WCDMA/LTE Watch + Bluetooth/BLE and DTS b/g/n.  
This test report addresses the DTS (WLAN) operational mode.

SM-R765T and SM-R765A are same H/W and only difference is supported band.  
Band 4 (LTE and WCDMA) of SM-R765A are disabled by S/W.  
SM-R765T was used for the test.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

Frequency Range [MHz]	Mode	Output Power [dBm]	Output Power [mW]
2412 - 2462	802.11b	16.86	48.53
	802.11g	15.33	34.12
	802.11n HT20	14.15	26.00

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antennas, with a antenna's maximum gain of -4.5 dBi.

### 5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

Based on the baseline scan, the worst-case data rates were:

802.11b mode: 1 Mbps  
802.11g mode: 6 Mbps  
802.11n HT20 mode: MCS0

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Adapter	SAMSUNG	ETA0U60JBE	DK1G826HS17-E	N/A
Data Cable	SAMSUNG	ECB-DU2EBE	N/A	N/A
Wireless Charger	SAMSUNG	EP-YO760	N/A	A3LEPYO760


### I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	0.8m	N/A

### TEST SETUP

The EUT is a stand-alone unit during the tests.  
Test software in hidden menu exercised the EUT to enable DTS mode.

**SETUP DIAGRAM FOR TESTS**

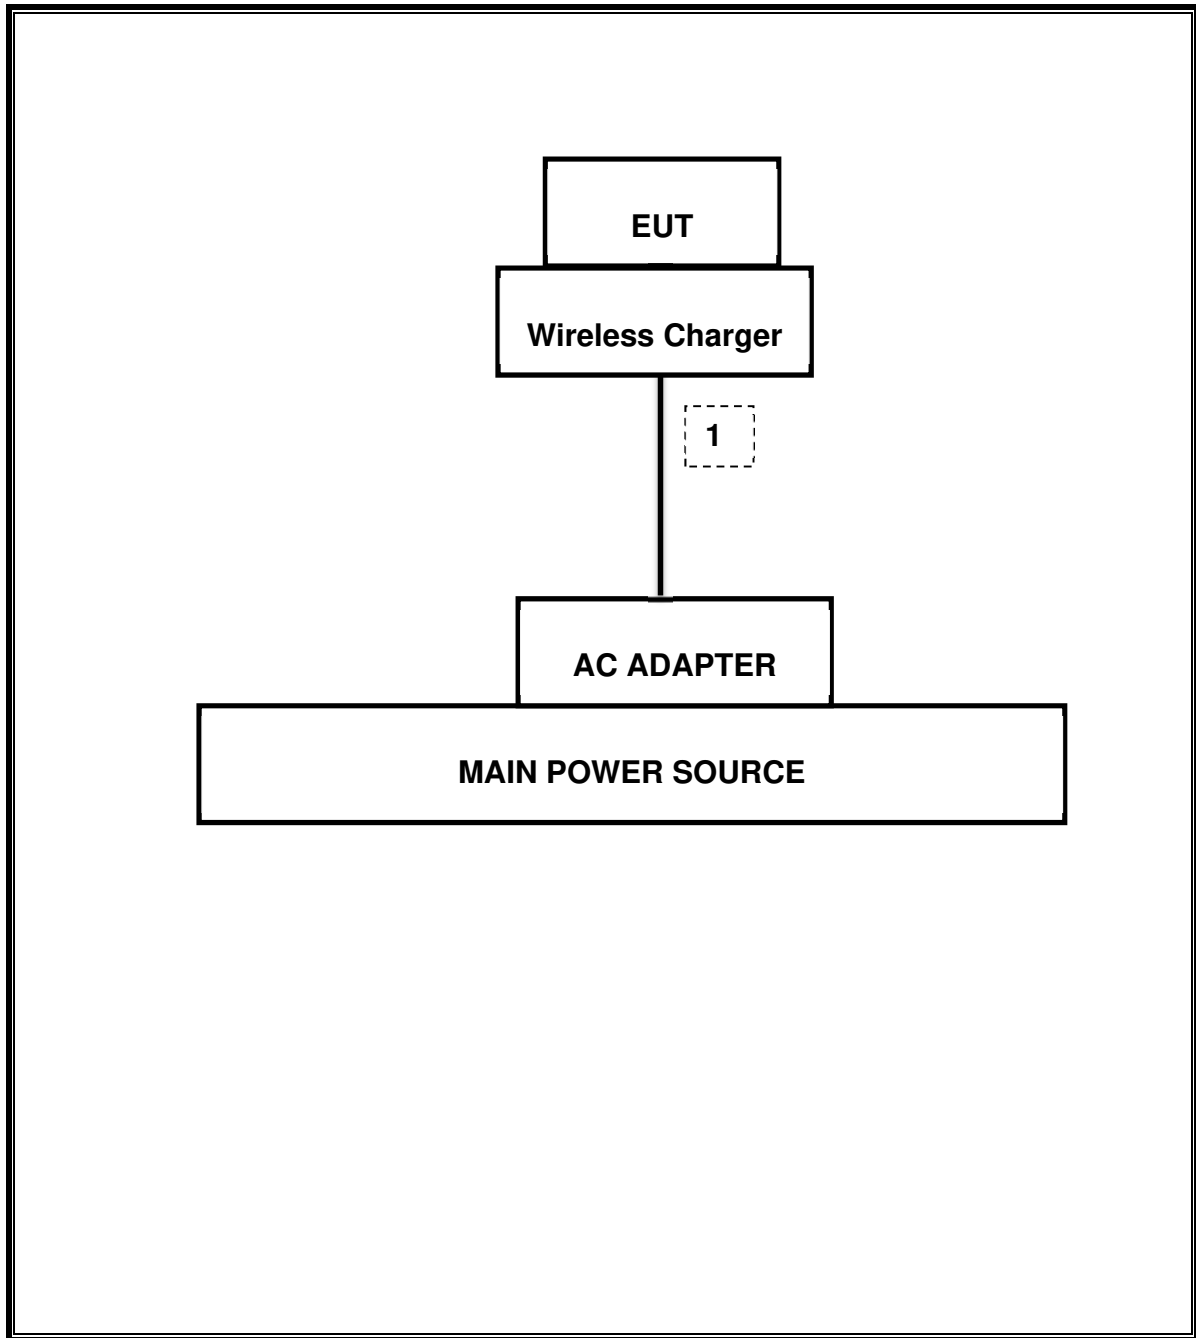

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	11-17-16
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	04-25-17
Antenna, Horn, 18 GHz	ETS	3115	00167211	09-20-16
Antenna, Horn, 18 GHz	ETS	3115	00161451	05-17-17
Antenna, Horn, 18 GHz	ETS	3117	00168724	06-17-17
Antenna, Horn, 18 GHz	ETS	3117	00168717	06-17-17
Antenna, Horn, 40 GHz	ETS	3116C	00166155	11-30-17
Antenna, Horn, 40 GHz	ETS	3116C-PA	00168841	12-15-17
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-17-17
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-16-17
Preamplifier	ETS	3115-PA	00167475	08-17-17
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-16-17
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-17-17
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-16-17
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	11-25-17
Average Power Sensor	R&S	NRZ-Z91	102681	08-16-17
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-17-17
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-17-17
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-16-17
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-16-17
Attenuator / Switch driver	HP	11713A	3748A04272	N/A
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	08-17-17
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	08-16-17
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	08-17-17
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	08-16-17
High Pass Filter 6GHz	Micro-Tronics	HPM17542	009	08-17-17
High Pass Filter 6GHz	Micro-Tronics	HPM17542	016	08-16-17
LISN	R&S	ENV-216	101836	08-16-17
LISN	R&S	ENV-216	101837	08-16-17
Attenuator	PASTERNAK	PE7087-10	A009	08-16-17

## 7. MEASUREMENT METHODS

KDB 558074 D01 DTS Meas Guidance v03r05: Measurement Procedure §9.2.3.1 AVGPM is used for average power and §10.5 AVGPS-2 is used for power spectral density.

Unwanted emissions within Restricted Bands are measured using traditional radiated procedures.

Band edge emissions within Restricted Bands are measured using RMS with duty cycle factor offset method.


## 8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

### LIMITS

None; for reporting purposes only.

### 8.1. ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B [msec]	Period [msec]	Duty Cycle x [Linear]	Duty Cycle [%]	Duty Cycle Correction Factor [dB]	1/T Minimum VBW [kHz]
<b>2400MHz Bands</b>						
802.11b	8.604	8.707	0.988	98.8%	0.00	0.010
802.11g	1.426	1.535	0.929	92.9%	0.32	0.701
802.11n HT20	1.336	1.444	0.925	92.5%	0.34	0.749

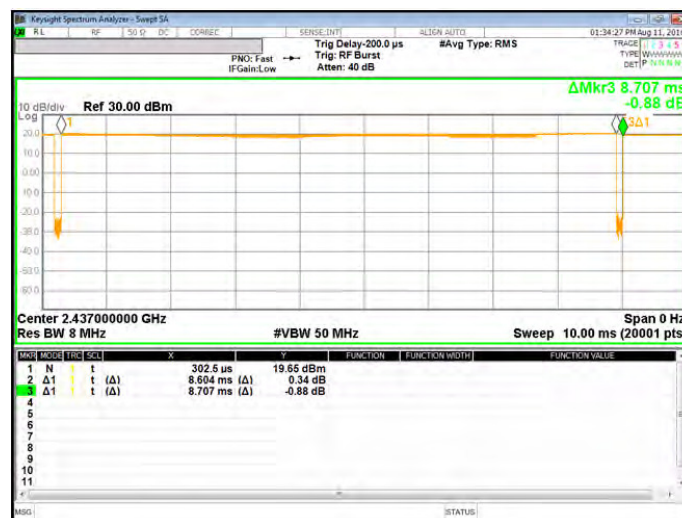

[802.11b]



[802.11g]



[802.11n]

## 9. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result	Worst Case
15.247 (a)(2)	Occupied Band width (6dB)	>500KHz	Conducted	Pass	8.564 MHz
2.1051, 15.247 (d)	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-28.846 dBm
15.247	TX conducted output power	<30dBm		Pass	16.86 dBm
15.247	PSD	<8dBm		Pass	-15.034 dBm
15.207 (a)	AC Power Line conducted emissions	Section 10	Power Line conducted	Pass	44.07 dBuV (Pk)
15.205, 15.209	Radiated Spurious Emission	< 74dBuV/m	Radiated	Pass	69.96 dBuV/m (Pk)

## 10. ANTENNA PORT TEST RESULTS

### 10.1. 6 dB BANDWIDTH

#### LIMITS

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.

#### TEST PROCEDURE

Reference to KDB 558074 D01 DTS Meas Guidance v03r05: The transmitter output is connected to a spectrum analyzer with the RBW set to 100kHz, the VBW  $\geq 3 \times$  RBW, peak detector and max hold.

#### RESULTS

##### 10.1.1. 802.11b MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	Minimum Limit [MHz]
Low	2412	9.043	0.5
Mid	2437	8.567	0.5
High	2462	8.564	0.5
Worst		8.564	0.5


##### 10.1.2. 802.11g MODE IN THE 2.4 GHz BAND


Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	Minimum Limit [MHz]
Low	2412	16.321	0.5
Mid	2437	16.334	0.5
High	2462	16.334	0.5
Worst		16.321	0.5


##### 10.1.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	Minimum Limit [MHz]
Low	2412	17.558	0.5
Mid	2437	17.596	0.5
High	2462	17.573	0.5
Worst		17.558	0.5

### 10.1.4. 6 dB BANDWIDTH PLOTS

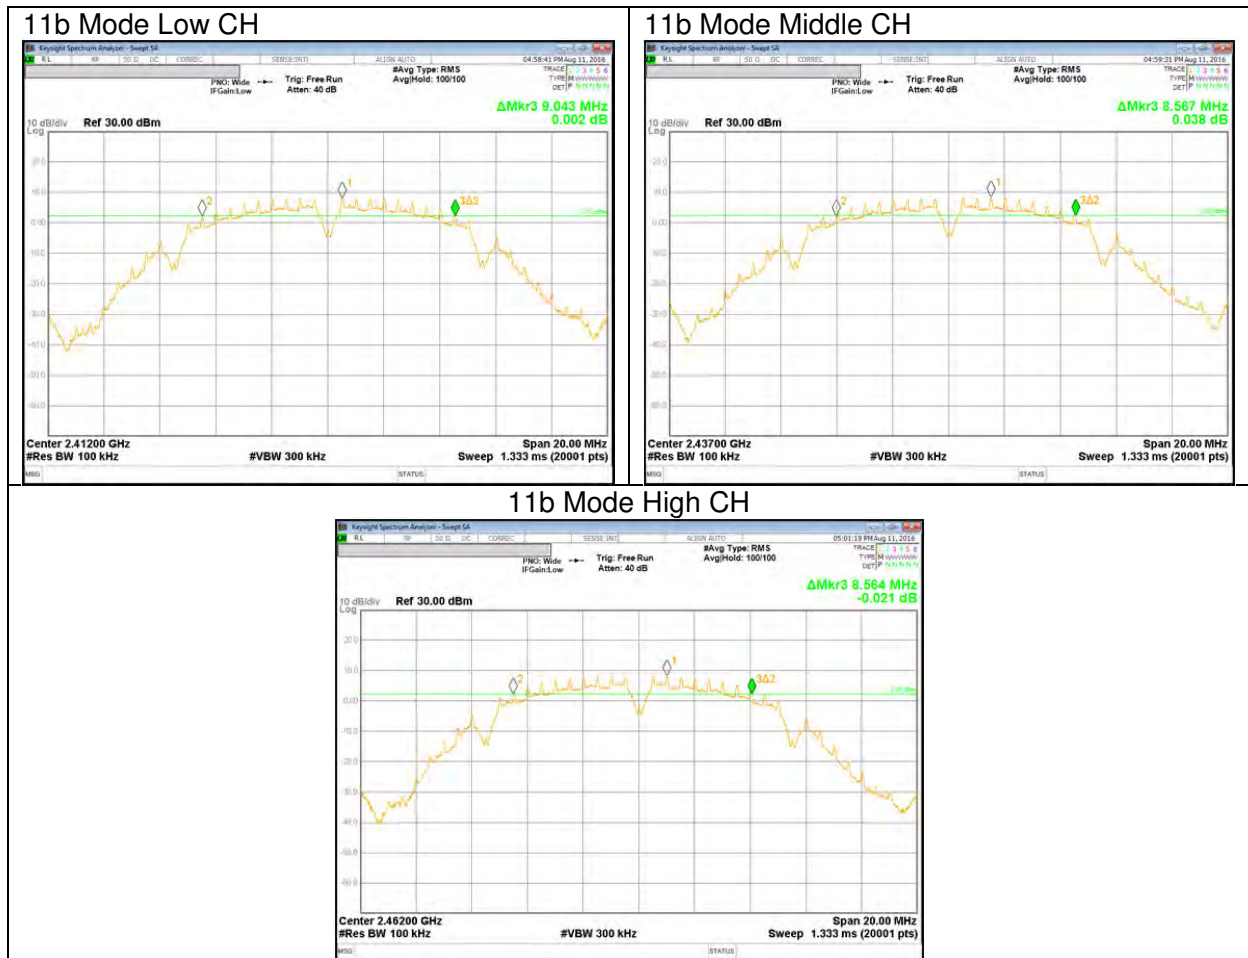

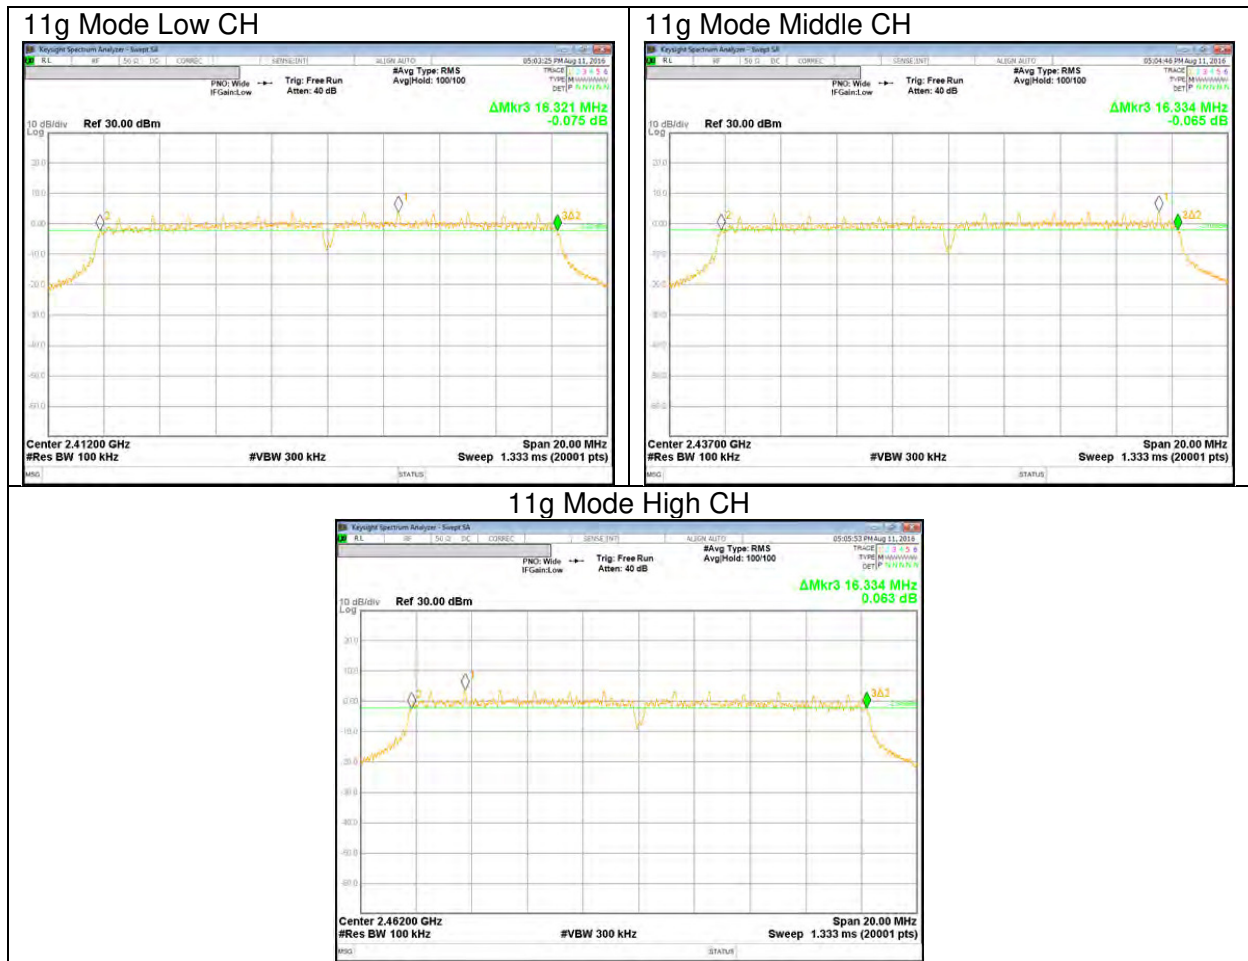

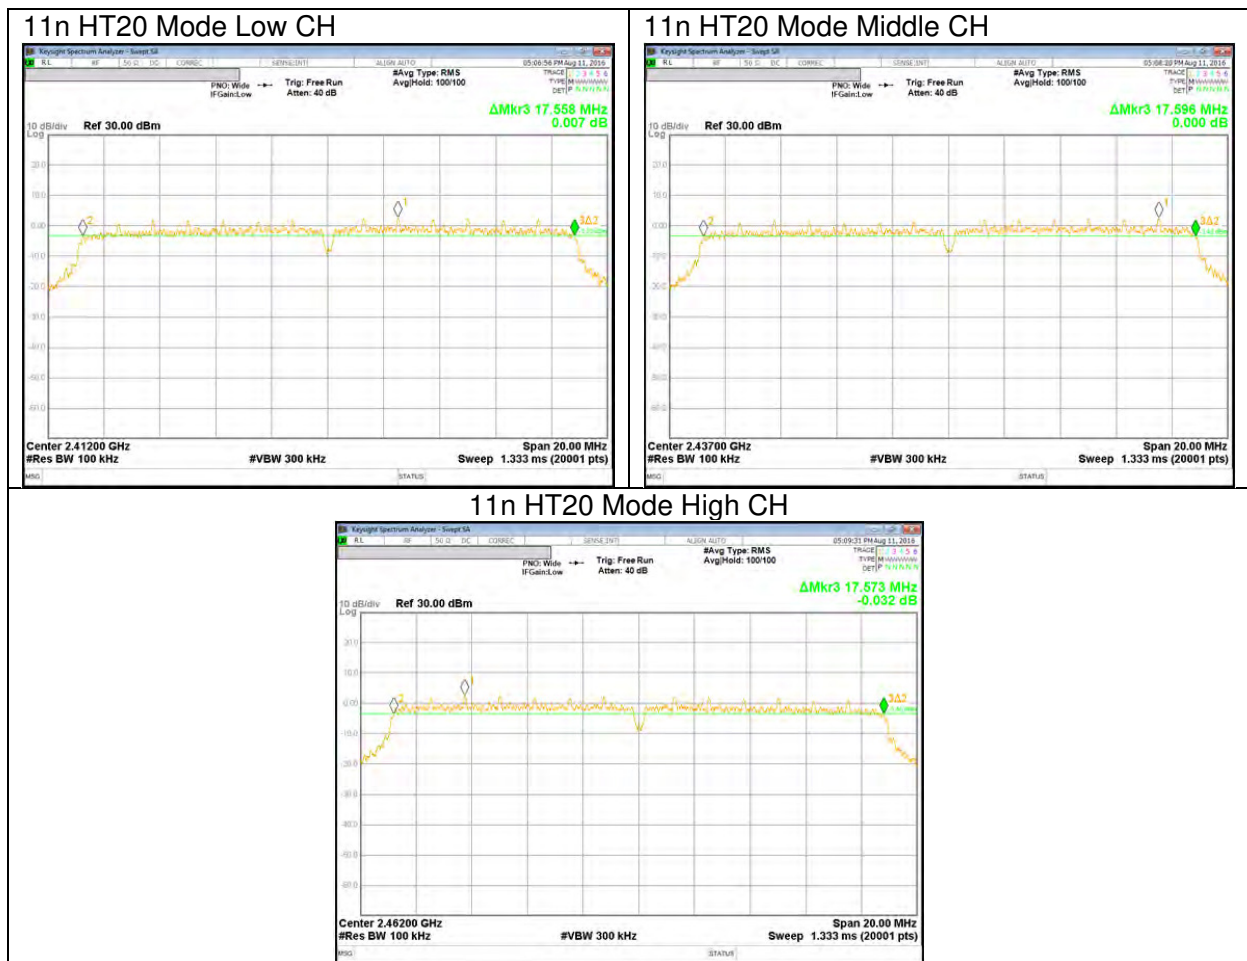

## 10.2. 99% BANDWIDTH

### LIMITS

None; for reporting purposes only.

### RESULTS

#### 10.2.1. 802.11b MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Low	2412	11.367
Mid	2437	11.826
High	2462	11.211
Worst		11.826


#### 10.2.2. 802.11g MODE IN THE 2.4 GHz BAND


Channel	Frequency [MHz]	99% Bandwidth [MHz]
Low	2412	16.450
Mid	2437	16.519
High	2462	16.502
Worst		16.519


#### 10.2.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Low	2412	17.676
Mid	2437	17.715
High	2462	17.639
Worst		17.715

### 10.2.4. 99% BANDWIDTH PLOTS

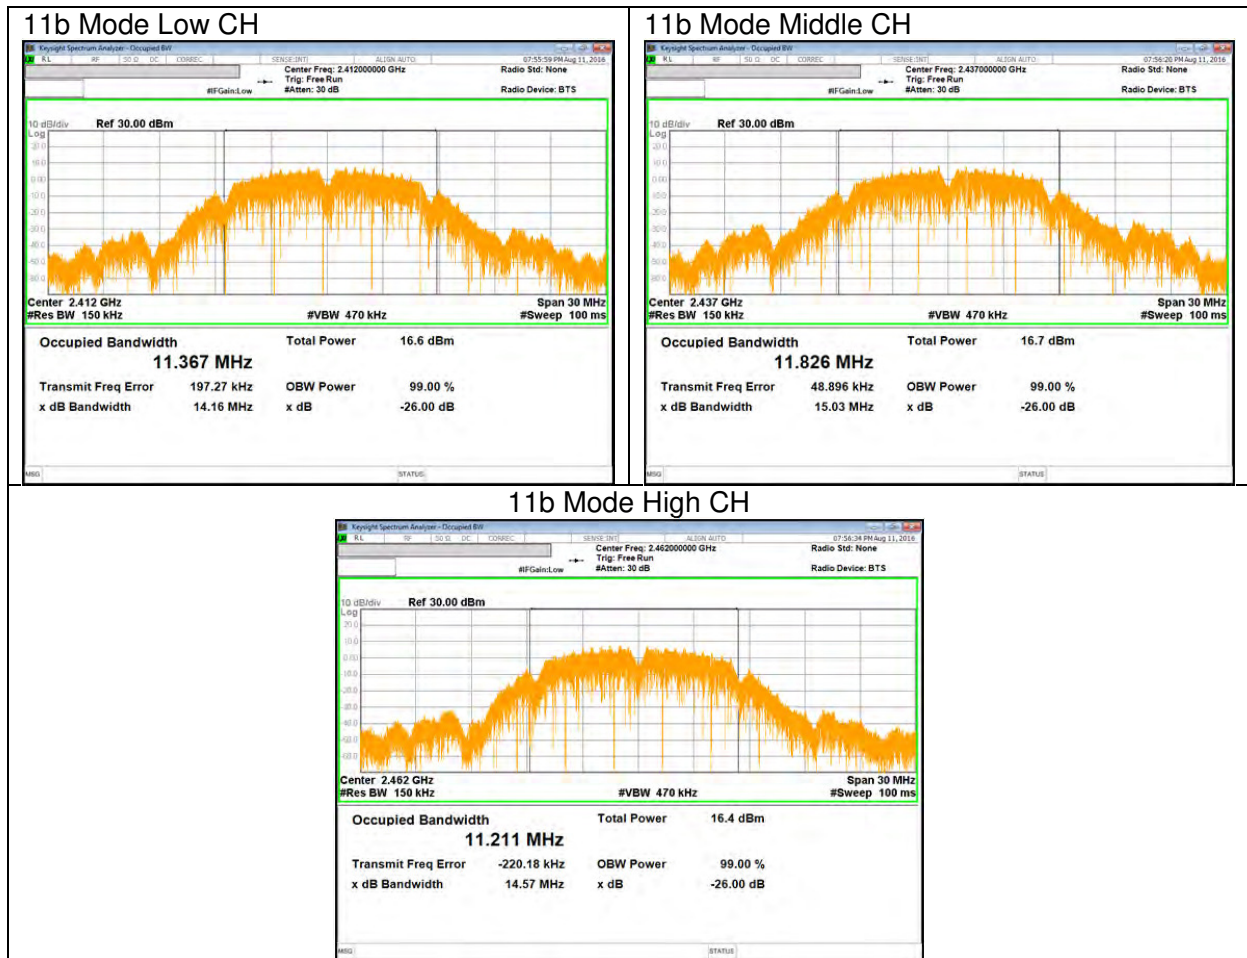

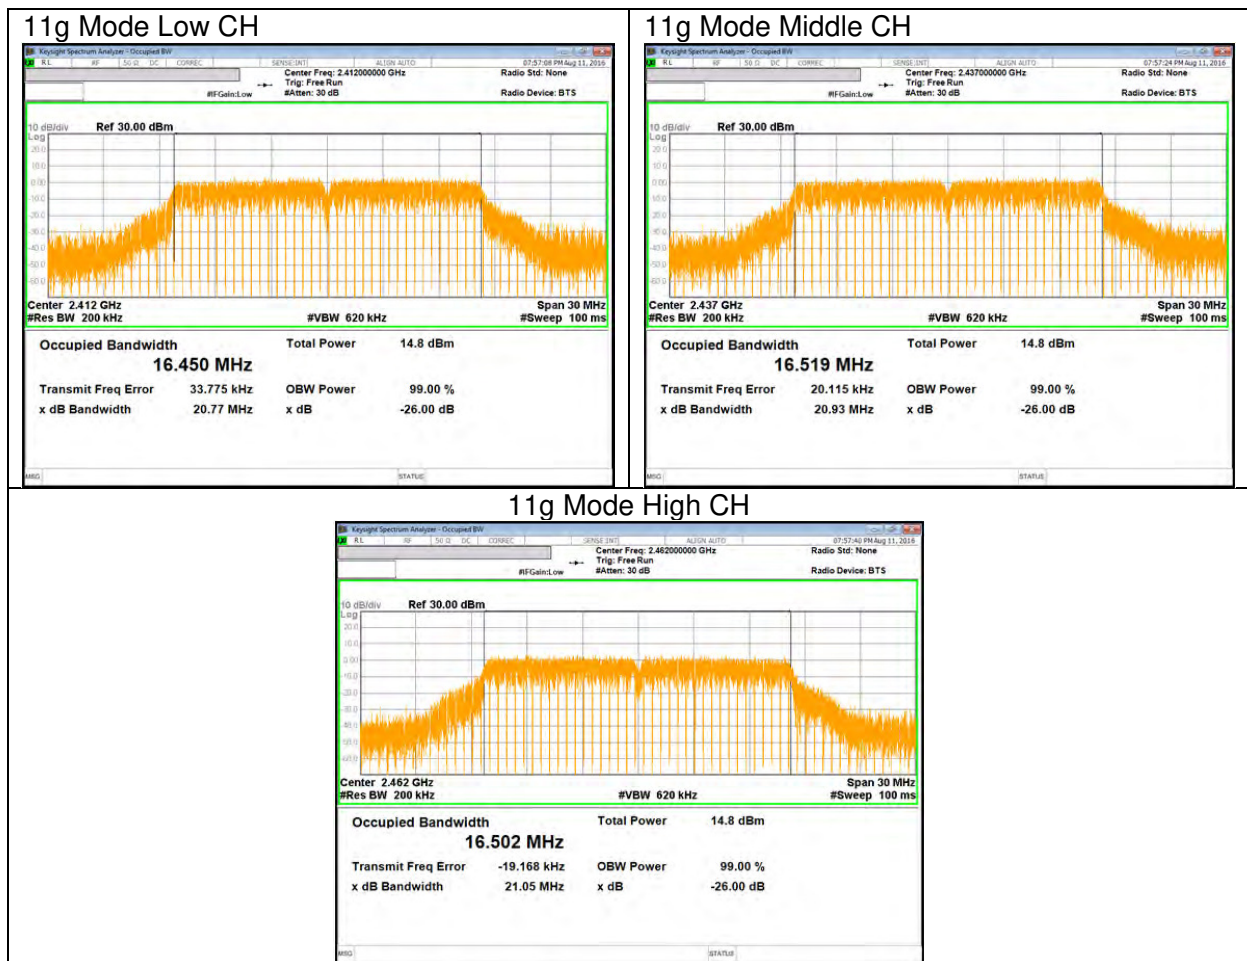

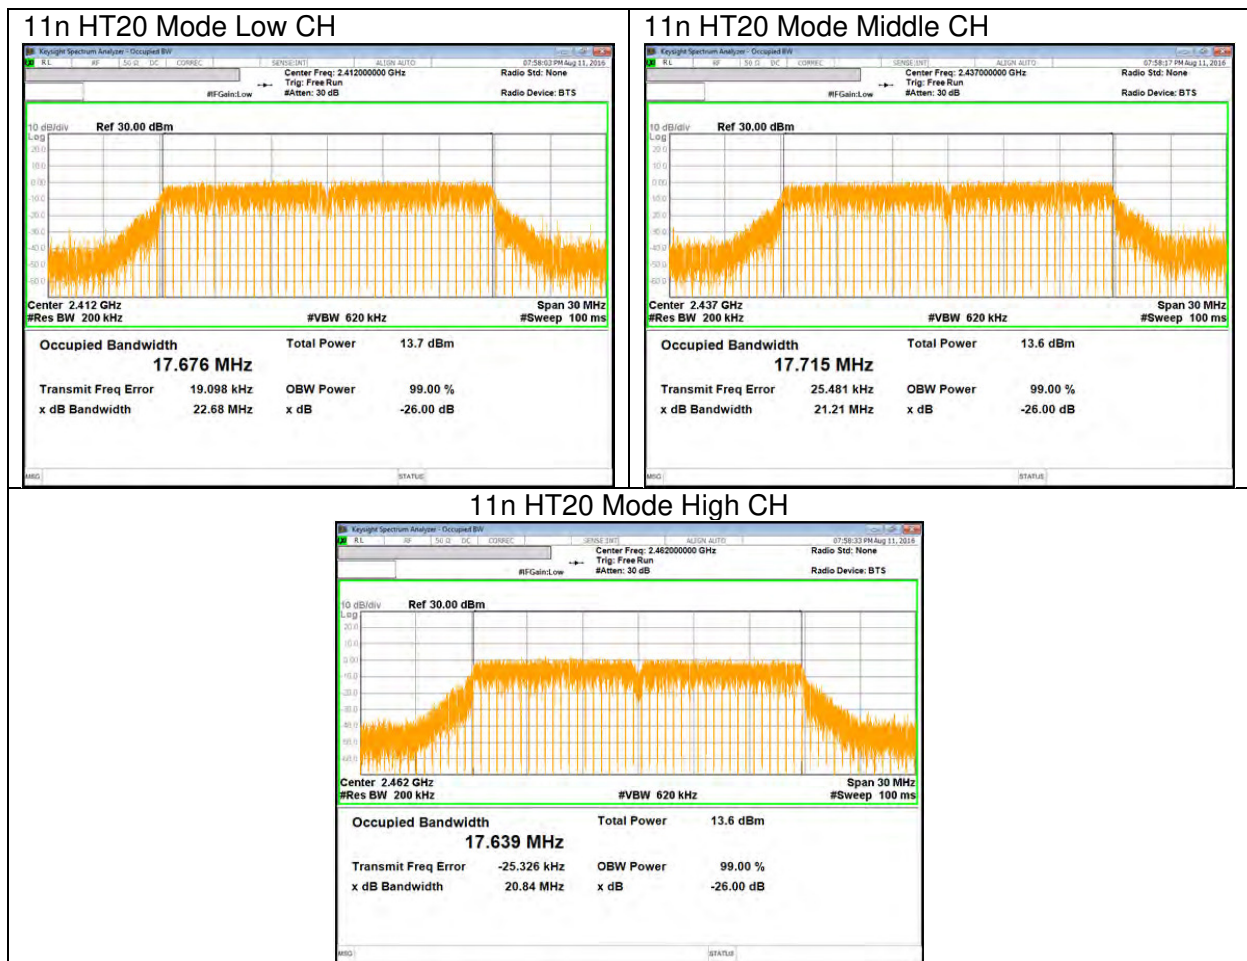

### **10.3. OUTPUT POWER**

#### **LIMITS**

FCC §15.247

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **DIRECTIONAL ANTENNA GAIN**

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

#### **TEST PROCEDURE**

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 10.1 dB (including 10 dB pad and 0.1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Duty cycle correction factor is already added to the average output power results for duty cycle factor < 98%. (802.11g, 802.11n mode)

**RESULTS**

**10.3.1. 802.11b MODE IN THE 2.4 GHz BAND**

**Limits**

Channel	Frequency [MHz]	Directional Gain Primary [dBi]	FCC Power Limit [dBm]	IC Power Limit [dBm]	IC EIRP Limit [dBm]	Max Power [dBm]
Low	2412	-4.50	30.00	30.00	36.00	30.00
Mid	2437	-4.50	30.00	30.00	36.00	30.00
High	2462	-4.50	30.00	30.00	36.00	30.00

**Results**

Channel	Frequency [MHz]	Primary Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Margin [dB]
Low	2412	16.75	16.75	36.00	-19.25
Mid	2437	16.86	16.86	36.00	-19.14
High	2462	16.59	16.59	36.00	-19.41
Worst			16.86	36.00	-19.14

**10.3.2. 802.11g MODE IN THE 2.4 GHz BAND**

**Limits**

Channel	Frequency [MHz]	Directional Gain Primary [dBi]	FCC Power Limit [dBm]	IC Power Limit [dBm]	IC EIRP Limit [dBm]	Max Power [dBm]
Low	2412	-4.50	30.00	30.00	36.00	30.00
Mid	2437	-4.50	30.00	30.00	36.00	30.00
High	2462	-4.50	30.00	30.00	36.00	30.00

**Results**

Channel	Frequency [MHz]	Primary Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Margin [dB]
Low	2412	15.19	15.19	36.00	-20.81
Mid	2437	15.33	15.33	36.00	-20.67
High	2462	15.15	15.15	36.00	-20.85
Worst			15.33	36.00	-20.67

**10.3.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND**

**Limits**

Channel	Frequency [MHz]	Directional Gain Primary [dBi]	FCC Power Limit [dBm]	IC Power Limit [dBm]	IC EIRP Limit [dBm]	Max Power [dBm]
Low	2412	-4.50	30.00	30.00	36.00	30.00
Mid	2437	-4.50	30.00	30.00	36.00	30.00
High	2462	-4.50	30.00	30.00	36.00	30.00

**Results**

Channel	Frequency [MHz]	Primary Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Margin [dB]
Low	2412	14.05	14.05	36.00	-21.95
Mid	2437	14.13	14.13	36.00	-21.87
High	2462	14.15	14.15	36.00	-21.85
Worst			14.15	36.00	-21.85

## **10.4. PSD**

### **LIMITS**

FCC §15.247

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### **TEST PROCEDURE**

Power Spectral Density was performed utilizing the "Method AVGPSD-1" under KDB558074 D01 DTS Meas Guidance v03r05

**RESULTS**

**10.4.1. 802.11b MODE IN THE 2.4 GHz BAND**

**PSD Results**

Channel	Frequency [MHz]	PSD Meas [dBm]	Duty Factor [dB]	Final PSD [dBm]	Limit [dBm]	Margin [dB]
Low	2412	-15.067	0.00	-15.067	8.00	-23.067
Mid	2437	-15.034	0.00	-15.034	8.00	-23.034
High	2462	-15.057	0.00	-15.057	8.00	-23.057

**10.4.2. 802.11g MODE IN THE 2.4 GHz BAND**

**PSD Results**


Channel	Frequency [MHz]	PSD Meas [dBm]	Duty Factor [dB]	Final PSD [dBm]	Limit [dBm]	Margin [dB]
Low	2412	-16.461	0.32	-16.141	8.00	-24.461
Mid	2437	-16.515	0.32	-16.195	8.00	-24.515
High	2462	-15.965	0.32	-15.645	8.00	-23.965


**10.4.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND**


**PSD Results**

Channel	Frequency [MHz]	PSD Meas [dBm]	Duty Factor [dB]	Final PSD [dBm]	Limit [dBm]	Margin [dB]
Low	2412	-19.567	0.34	-19.227	8.00	-27.567
Mid	2437	-19.674	0.34	-19.334	8.00	-27.674
High	2462	-20.202	0.34	-19.862	8.00	-28.202

### 10.4.4. PSD PLOTS

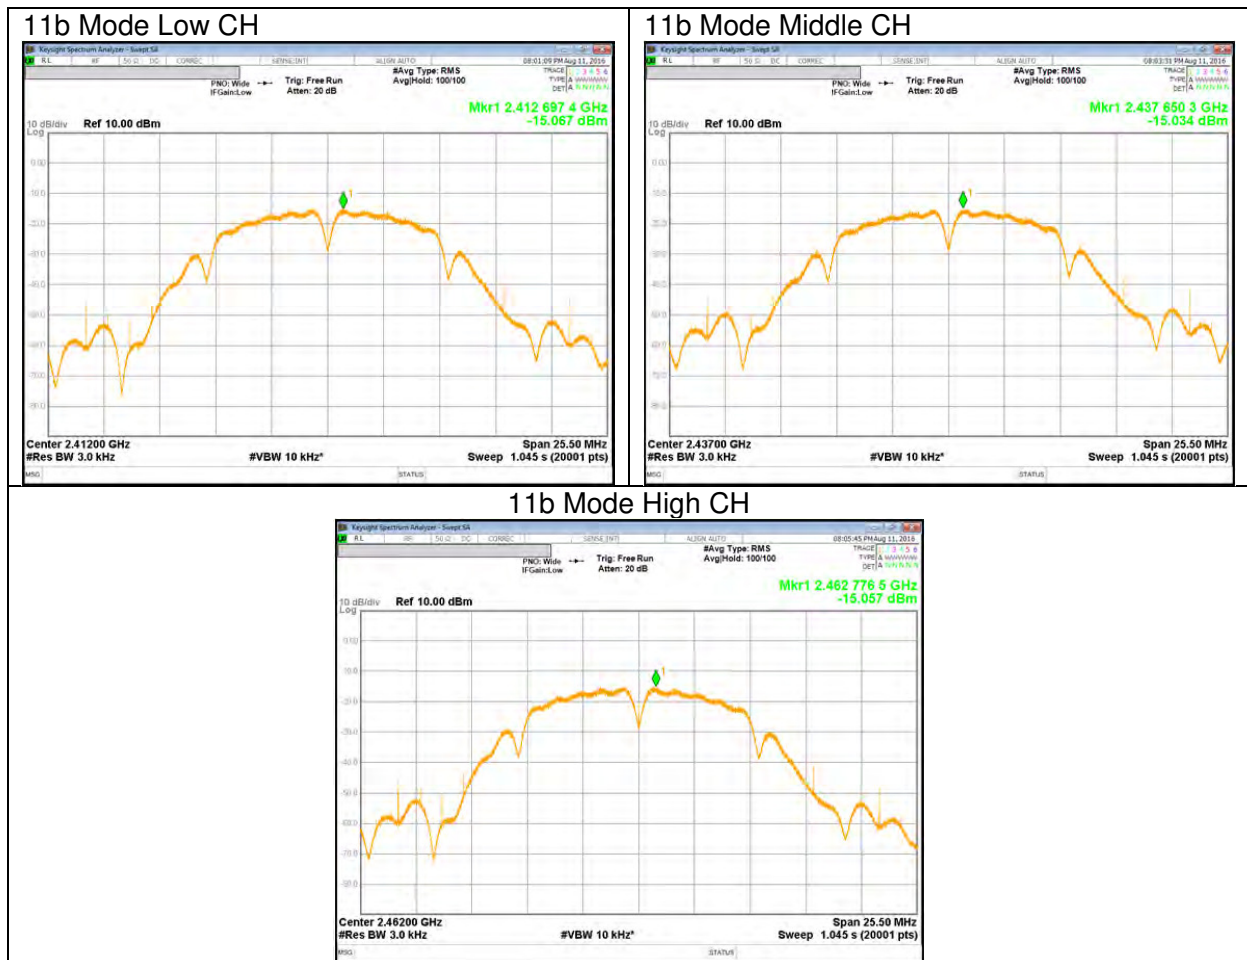

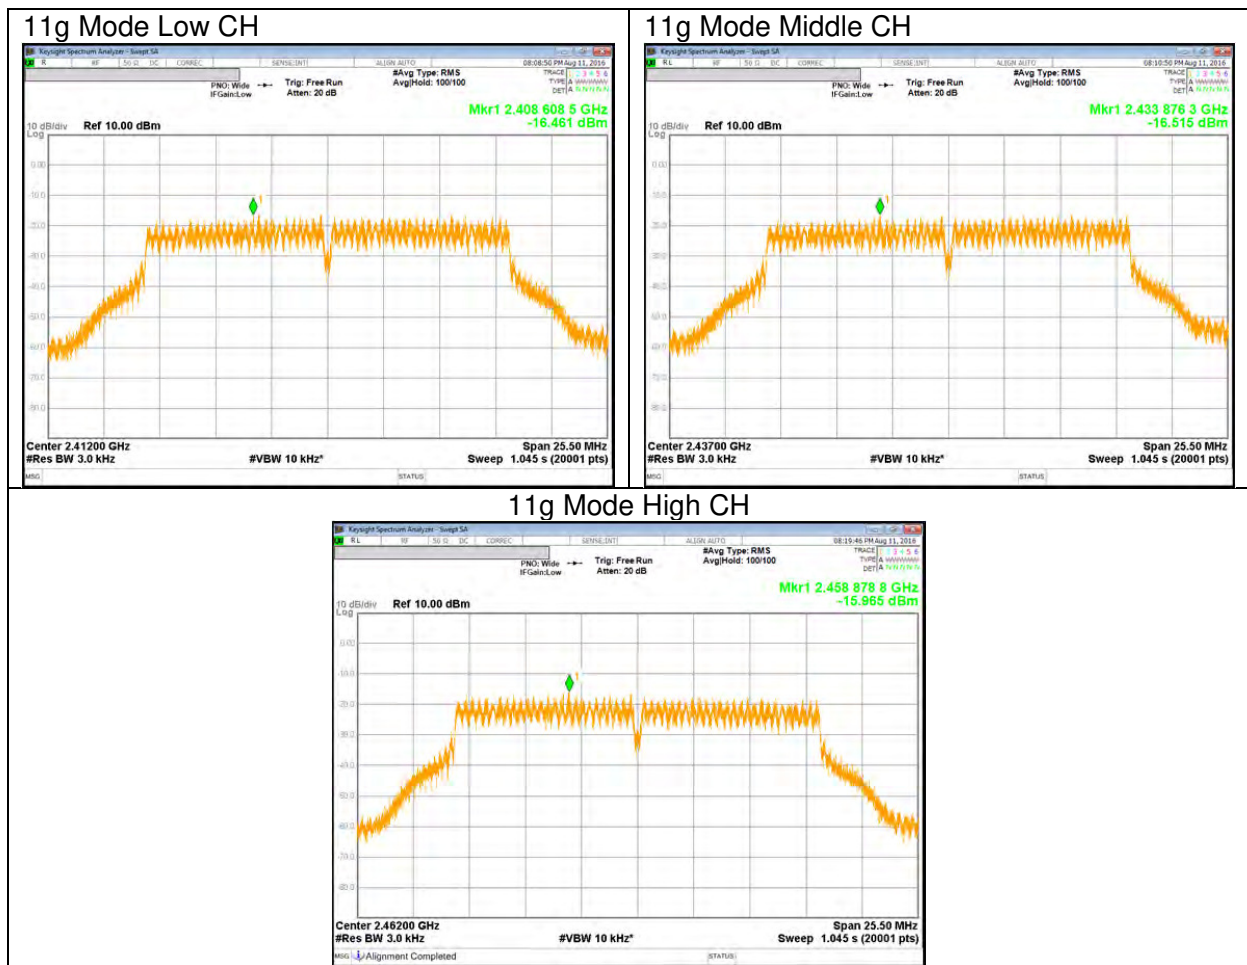

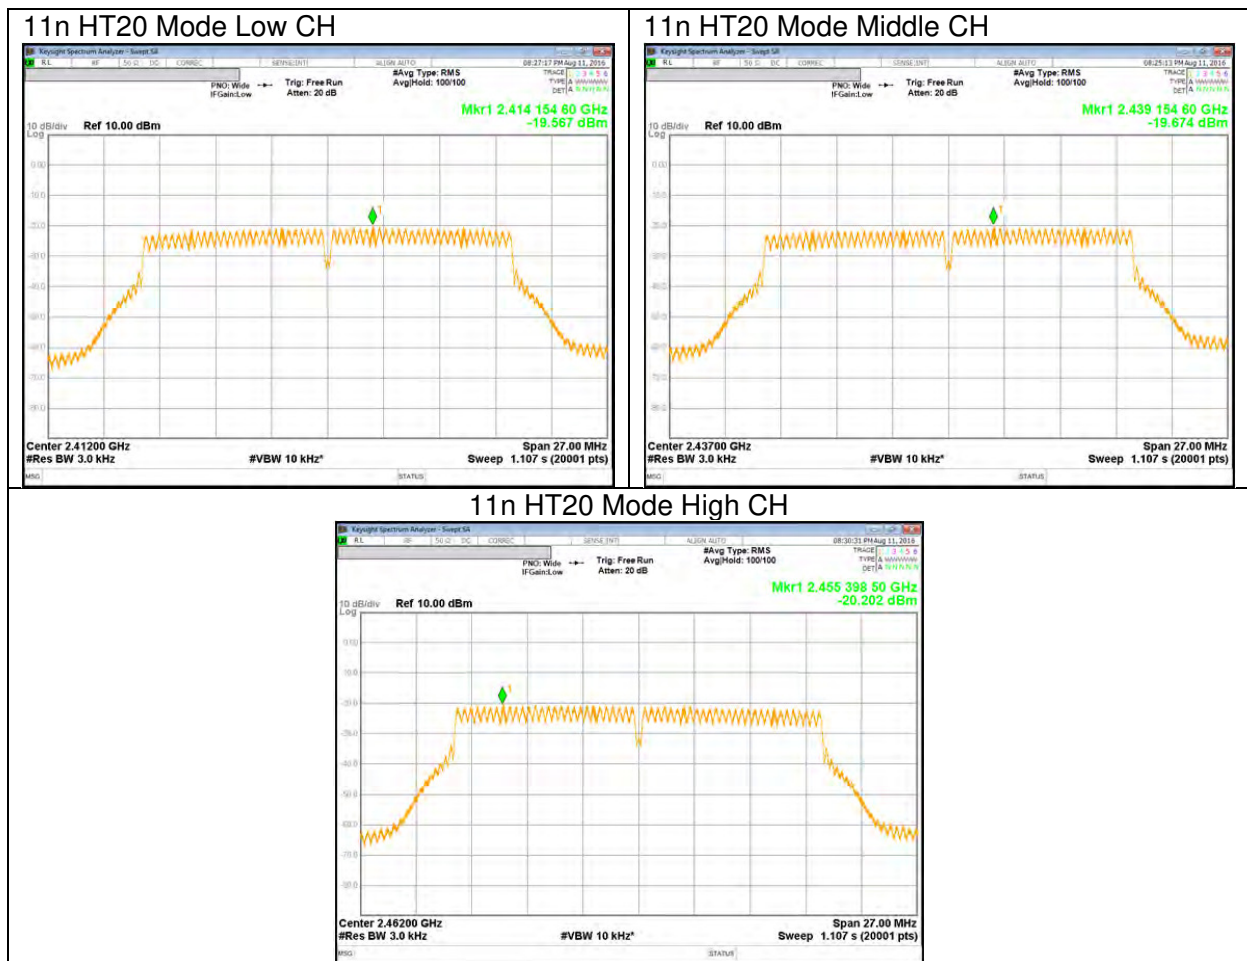

## 10.5. OUT-OF-BAND EMISSIONS

### LIMITS

FCC §15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer with RBW = 100 kHz, VBW = 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, bandedge (where measurements to the general radiated limits will not be made) and out-of-band emissions.

**RESULTS**

**10.5.1. 802.11b MODE IN THE 2.4 GHz BAND**

**Low Channel BandEdge**





**Low Channel Spurious**








### 10.5.2. 802.11g MODE IN THE 2.4 GHz BAND

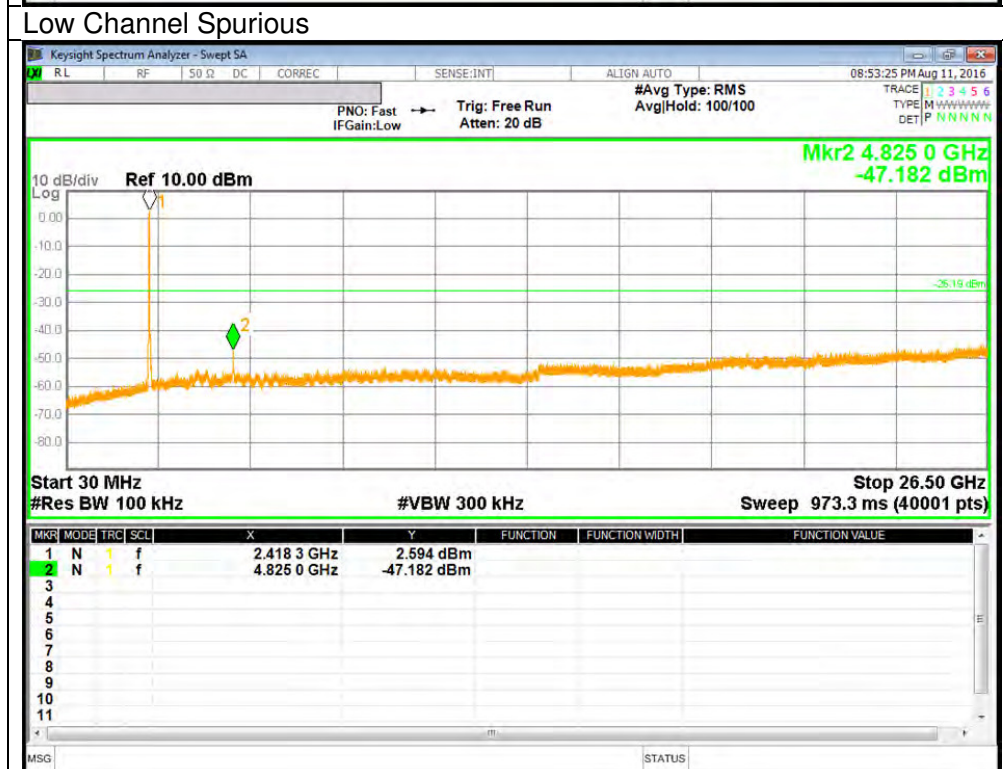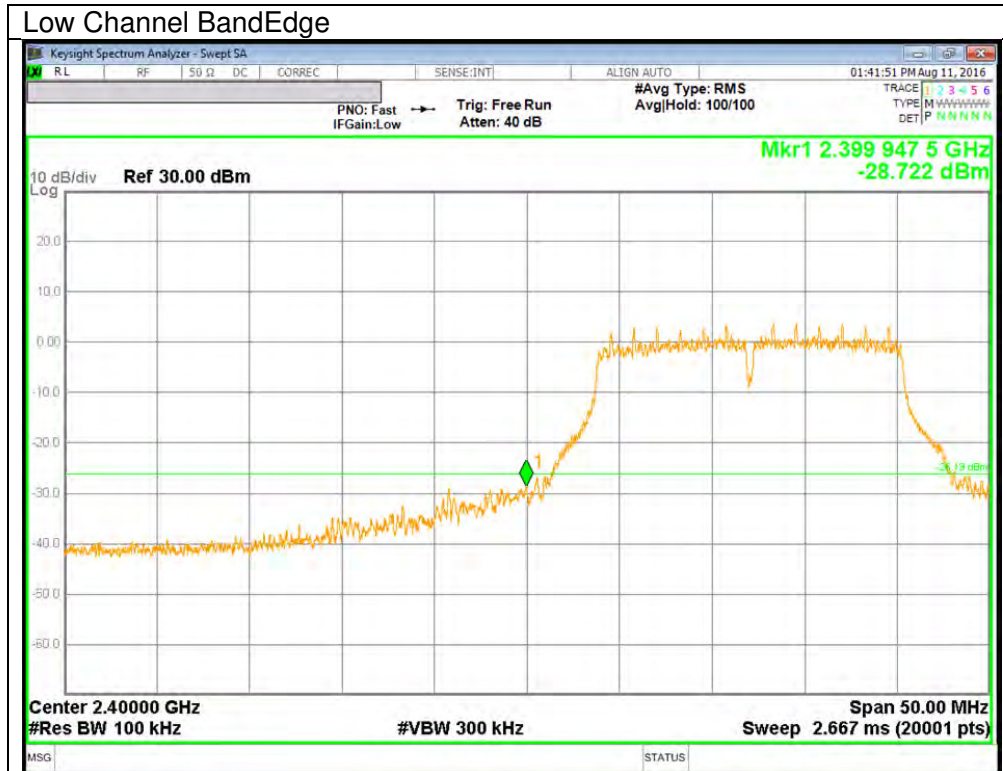

Middle Channel BandEdge





Middle Channel Spurious

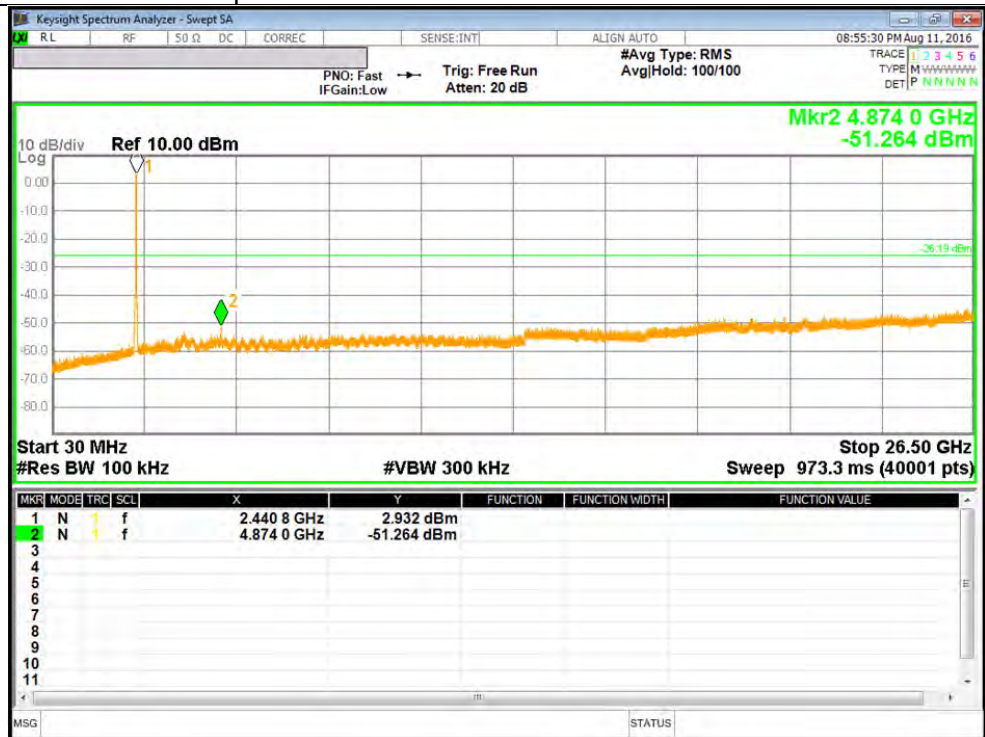



### 10.5.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

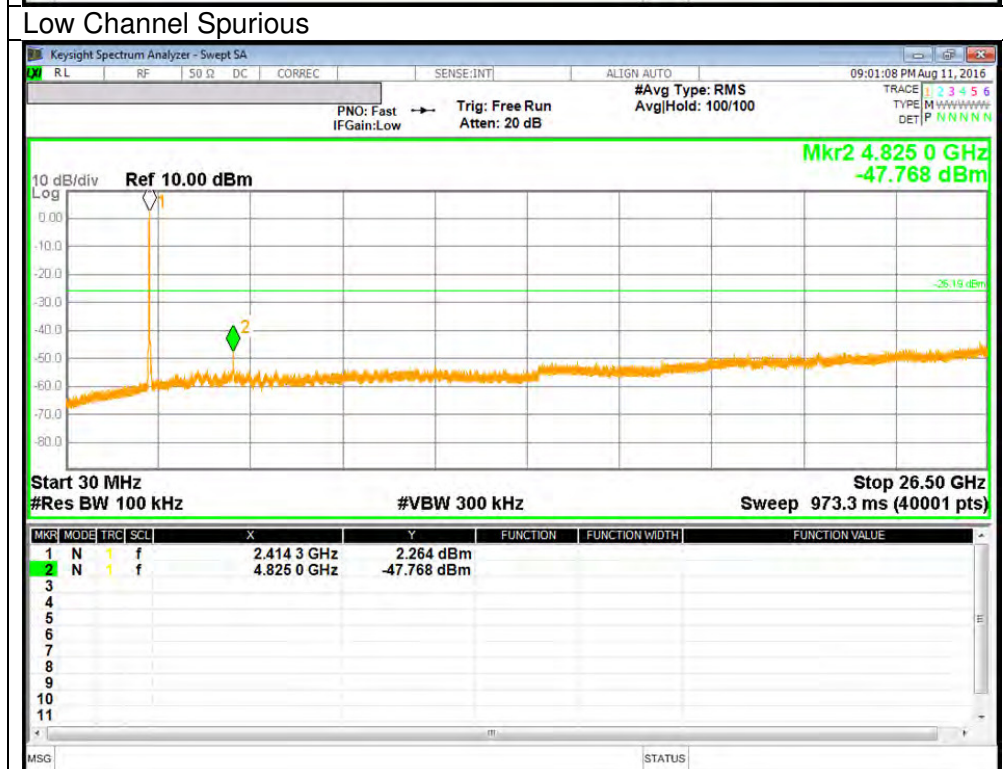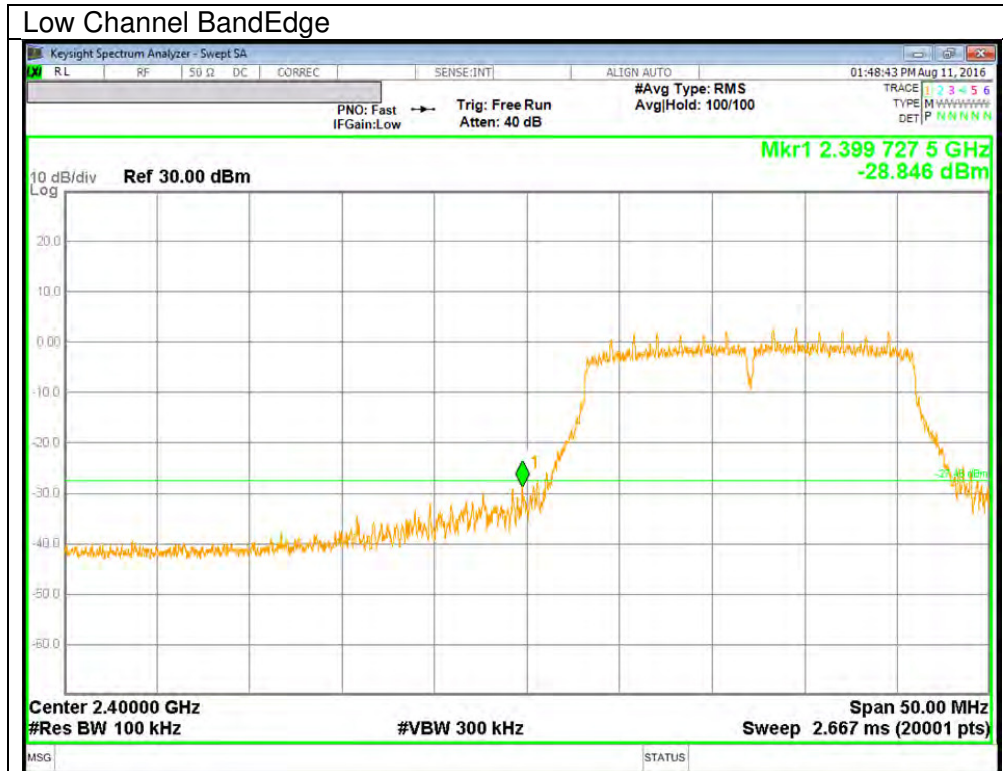





## 11. RADIATED TEST RESULTS

### 11.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits ( $\mu\text{V}/\text{m}$ )	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

## **TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor for average measurements. (Restricted bandedge, Final detection of spurious harmonic emissions)  
Duty cycle factor=  $10\log(1/x)$  For this sample B mode = 0dB (duty cycle >98%); G mode = 0.32dB; N mode = 0.34dB.

Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.

The spectrum from 1 GHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.  
(From 30MHz to 1GHz, test was performed with the EUT set to transmit at the channel with highest output power)

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note : Emission was pre-scanned from 9KHz to 30MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).  
Per FCC part 15.31(o), test results were not reported.


Formula for converting the filed strength from uV/m to dBuV/m is:  
Limit (dBuV/m) = 20 log limit (uV/m)

## 11.2. TRANSMITTER ABOVE 1 GHz

### 11.2.1. TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND

#### RESTRICTED BANDEDGE (LOW CHANNEL)

#### HORIZONTAL PEAK AND AVERAGE PLOT

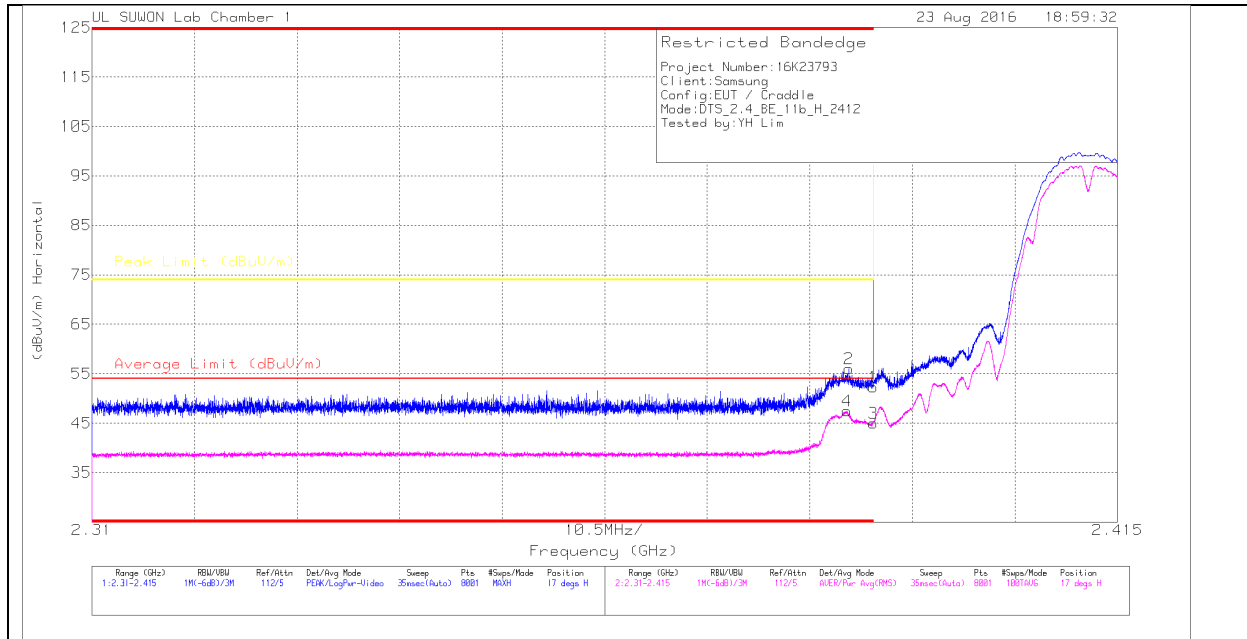

#### HORIZONTAL DATA

##### Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17_150619)	Path_2	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	49.53	Pk			0	52.33	-	-	74	-21.67	17	150	H
2	* 2.387	53.19	Pk			0	55.99	-	-	74	-18.01	17	150	H
3	* 2.39	42.22	RMS			0	45.02	54	-8.98	-	-	17	150	H
4	* 2.387	44.63	RMS			0	47.43	54	-6.57	-	-	17	150	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

**VERTICAL PEAK AND AVERAGE PLOT**

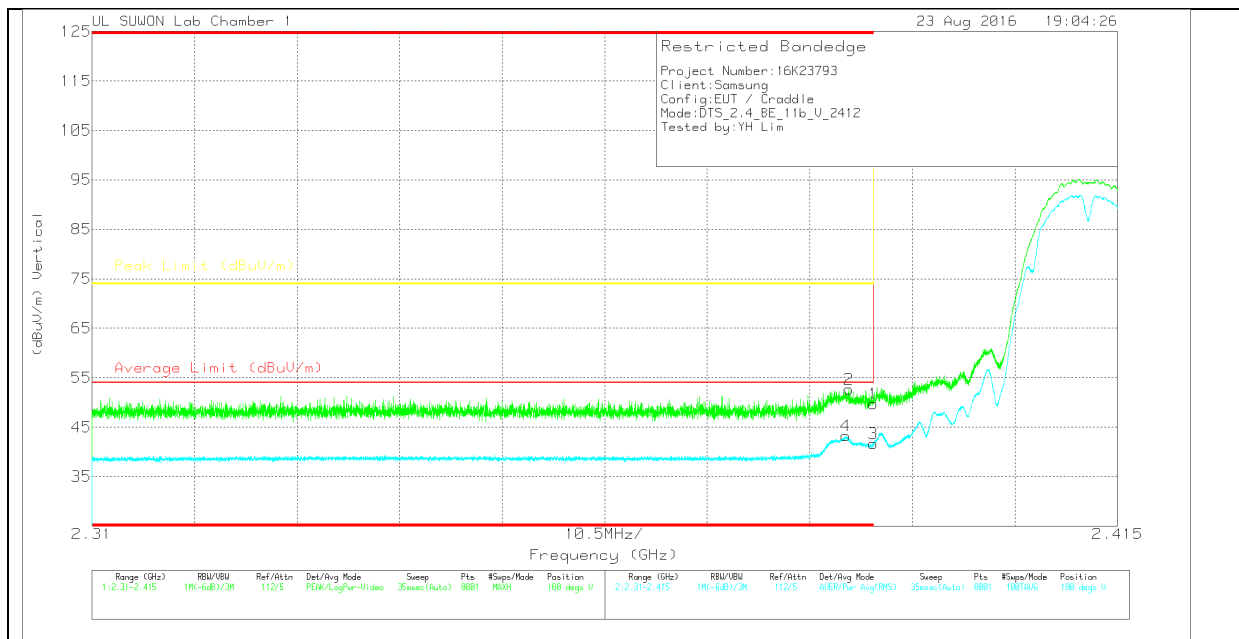

**VERTICAL DATA**

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_2	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	46.96	PK	31.8	-29	0	49.76	-	-	74	-24.24	180	260	V
2	* 2.387	49.84	PK	31.8	-29	0	52.64	-	-	74	-21.36	180	260	V
3	* 2.39	38.9	RMS	31.8	-29	0	41.7	54	-12.3	-	-	180	260	V
4	* 2.387	40.45	RMS	31.8	-29	0	43.25	54	-10.75	-	-	180	260	V


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

### AUTHORIZED BANDEDGE (HIGH CHANNEL)

#### HORIZONTAL PEAK AND AVERAGE PLOT

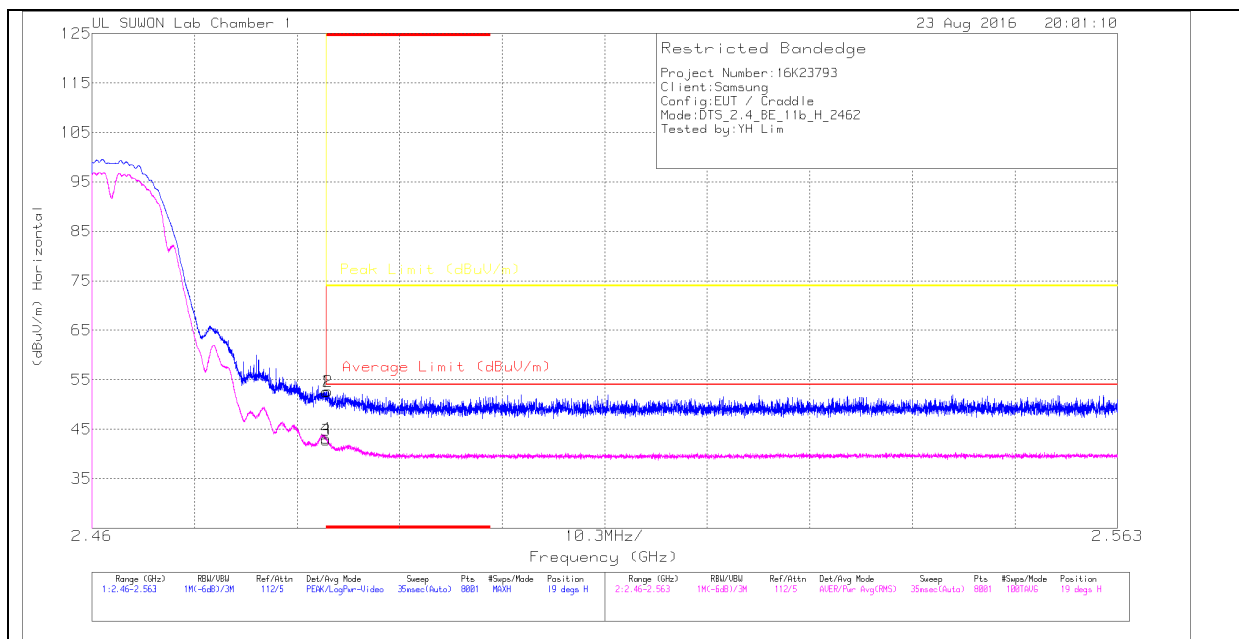

#### HORIZONTAL DATA

##### Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17_150619)	Path_2	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	48.86	PK	32	-28.3	0	52.56	-	-	74	-21.44	19	280	H
2	* 2.484	48.98	PK	32	-28.3	0	52.68	-	-	74	-21.32	19	280	H
3	* 2.484	39.13	RMS	32	-28.3	0	42.83	54	-11.17	-	-	19	280	H
4	* 2.484	39.43	RMS	32	-28.3	0	43.13	54	-10.87	-	-	19	280	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

**VERTICAL PEAK AND AVERAGE PLOT**

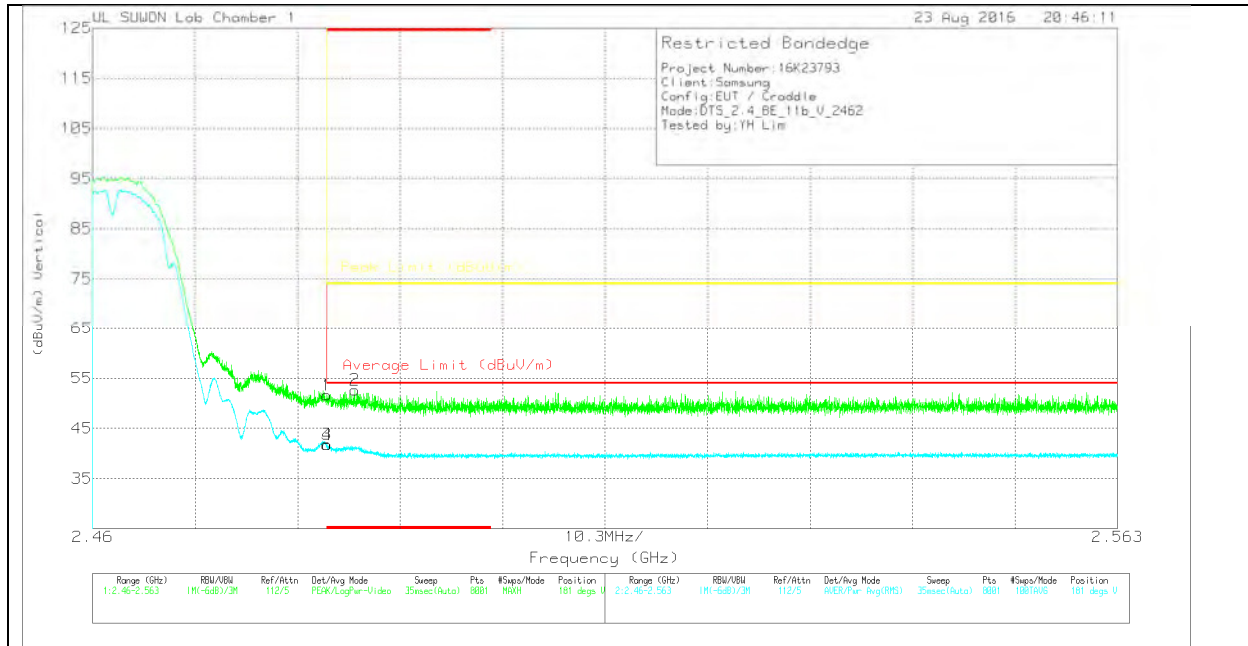

**VERTICAL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_2	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	47.9	PK	32	-28.3	0	51.6	-	-	74	-22.4	181	100	V
2	* 2.486	48.96	PK	32	-28.3	0	52.66	-	-	74	-21.34	181	100	V
3	* 2.484	38.11	RMS	32	-28.3	0	41.81	54	-12.19	-	-	181	100	V
4	* 2.484	38.08	RMS	32	-28.3	0	41.78	54	-12.22	-	-	181	100	V


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


RMS - RMS detection

## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL HORIZONTAL

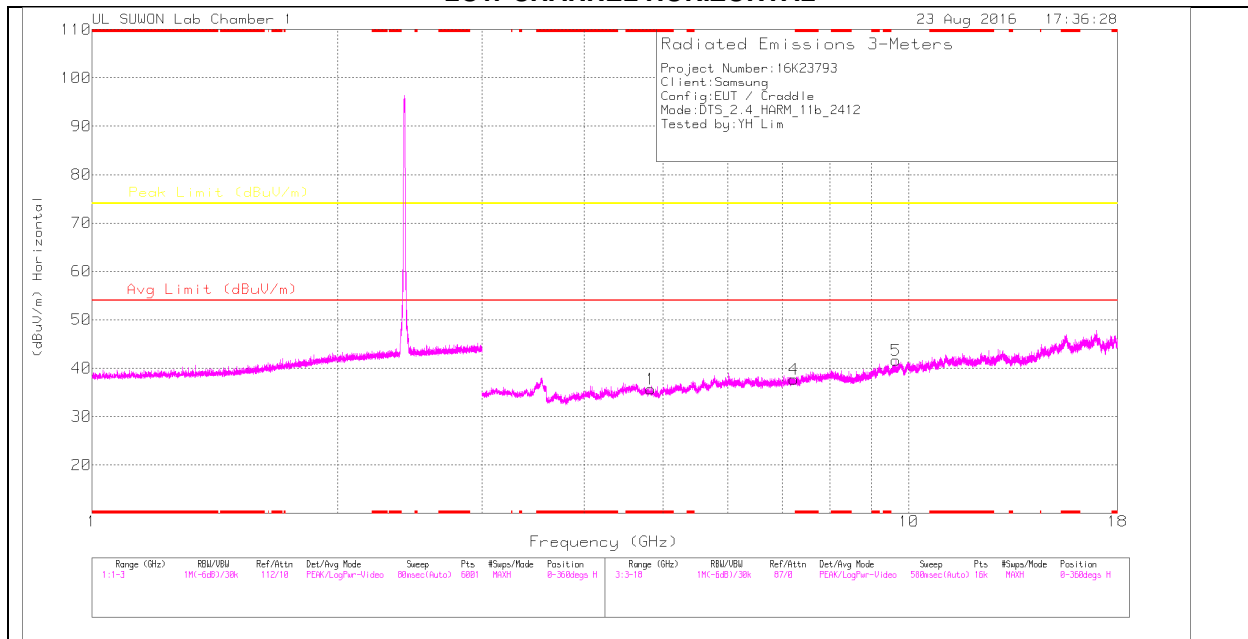

### LOW CHANNEL VERTICAL

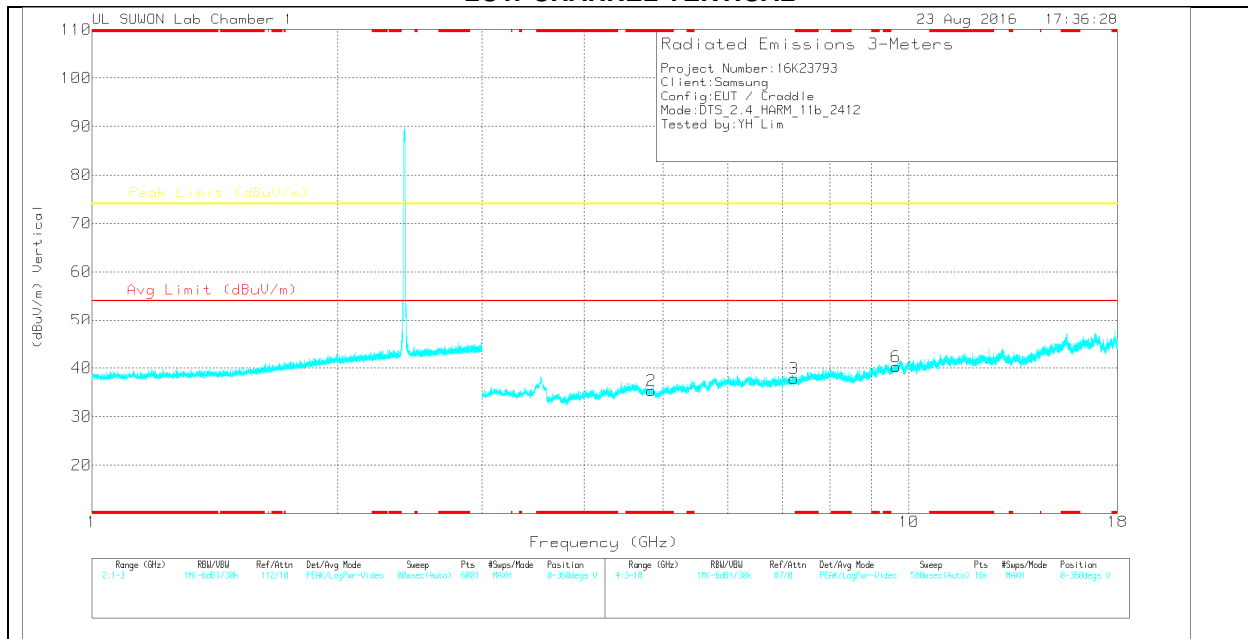

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL DATA**

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_3	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.831	35.5	Pk	34	-33.8	0	35.7	-	-	74	-38.3	0-360	250	H
4	7.231	33.01	Pk	35.7	-31	0	37.71	-	-	74	-36.29	0-360	150	H
5	9.636	31.92	Pk	37	-27.3	0	41.62	-	-	74	-32.38	0-360	150	H
2	* 4.835	35.26	Pk	34	-33.9	0	35.36	-	-	74	-38.64	0-360	250	V
3	7.231	33.18	Pk	35.7	-31	0	37.88	-	-	74	-36.12	0-360	250	V
6	9.644	30.55	Pk	37.1	-27.4	0	40.25	-	-	74	-33.75	0-360	250	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


Pk – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

**MID CHANNEL HORIZONTAL**

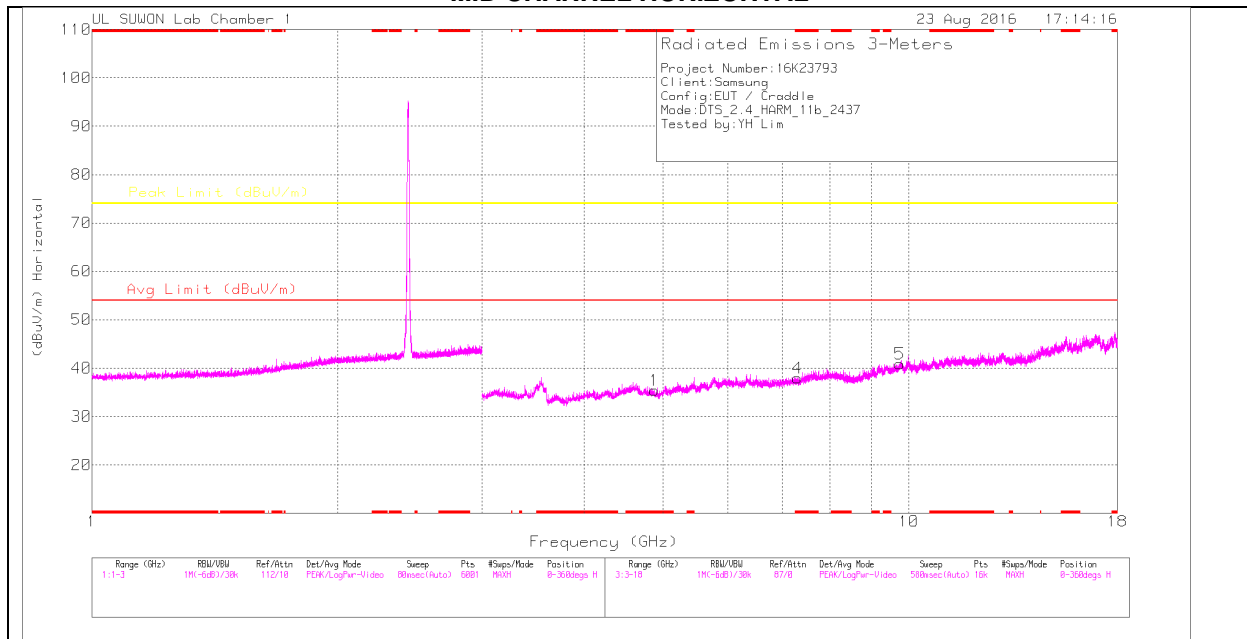

**MID CHANNEL VERTICAL**

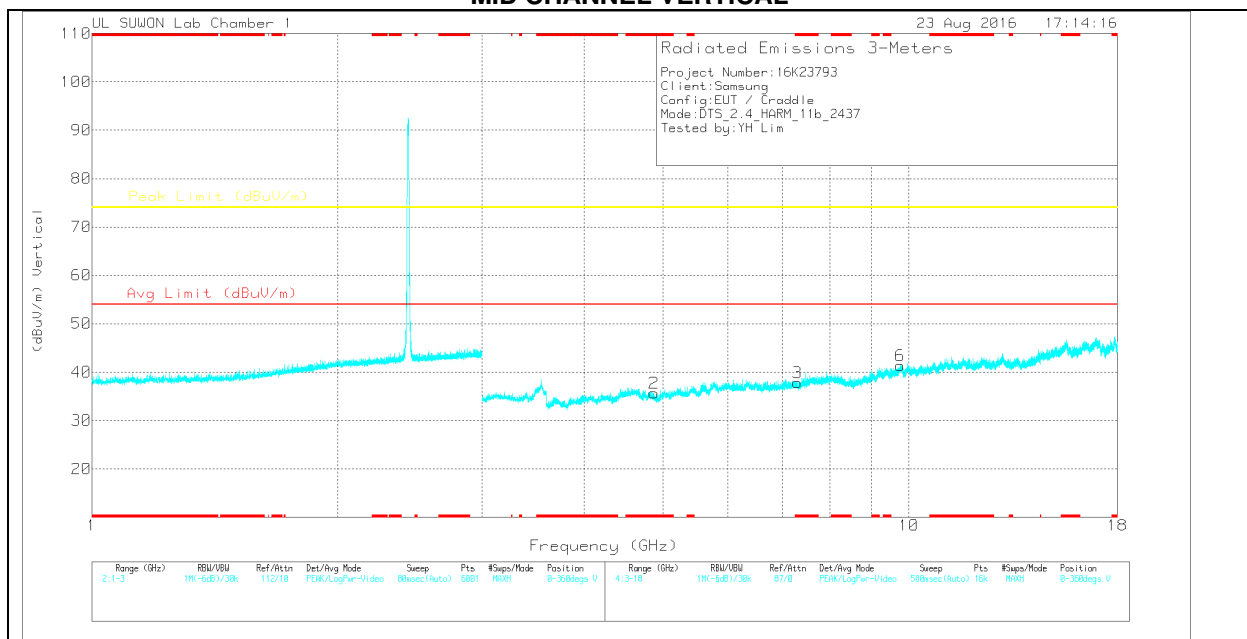

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL DATA**

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_3	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.881	35.44	Pk	34	-34	0	35.44	-	-	74	-38.56	0-360	150	H
4	* 7.308	33.2	Pk	35.7	-30.9	0	38	-	-	74	-36	0-360	150	H
5	9.748	30.53	Pk	37.2	-26.8	0	40.93	-	-	74	-33.07	0-360	150	H
2	* 4.876	35.73	Pk	34	-34	0	35.73	-	-	74	-38.27	0-360	150	V
3	* 7.306	33.06	Pk	35.7	-30.9	0	37.86	-	-	74	-36.14	0-360	150	V
6	9.753	30.82	Pk	37.2	-26.7	0	41.32	-	-	74	-32.68	0-360	250	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


Pk – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

**HIGH CHANNEL HORIZONTAL**

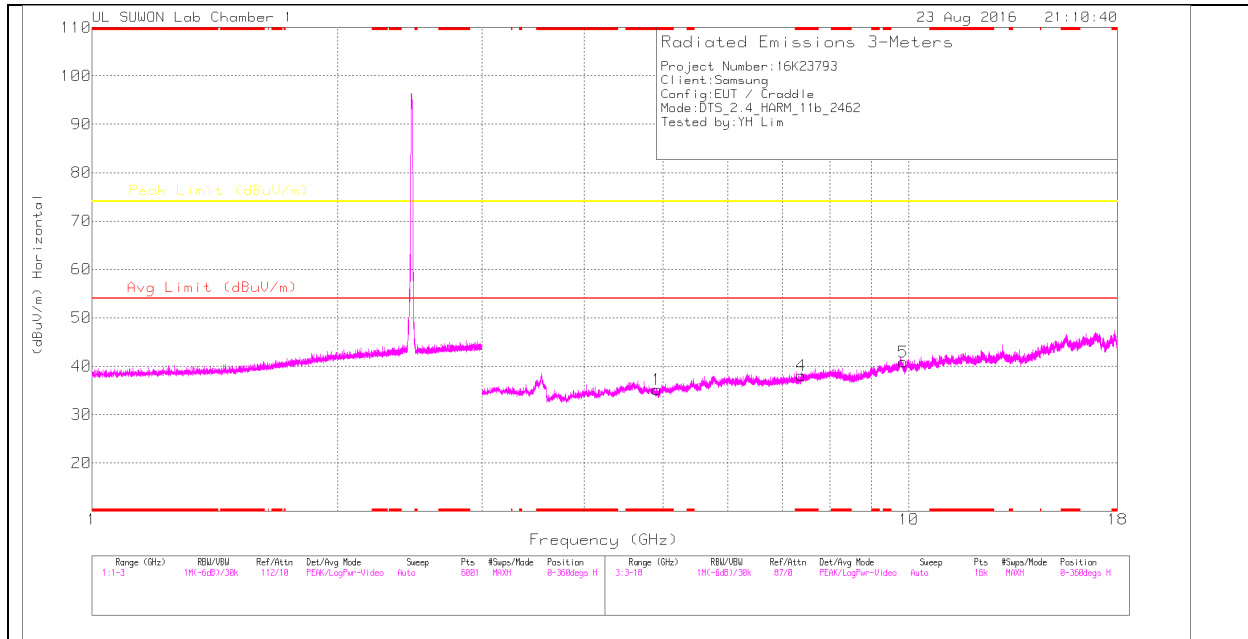

**HIGH CHANNEL VERTICAL**

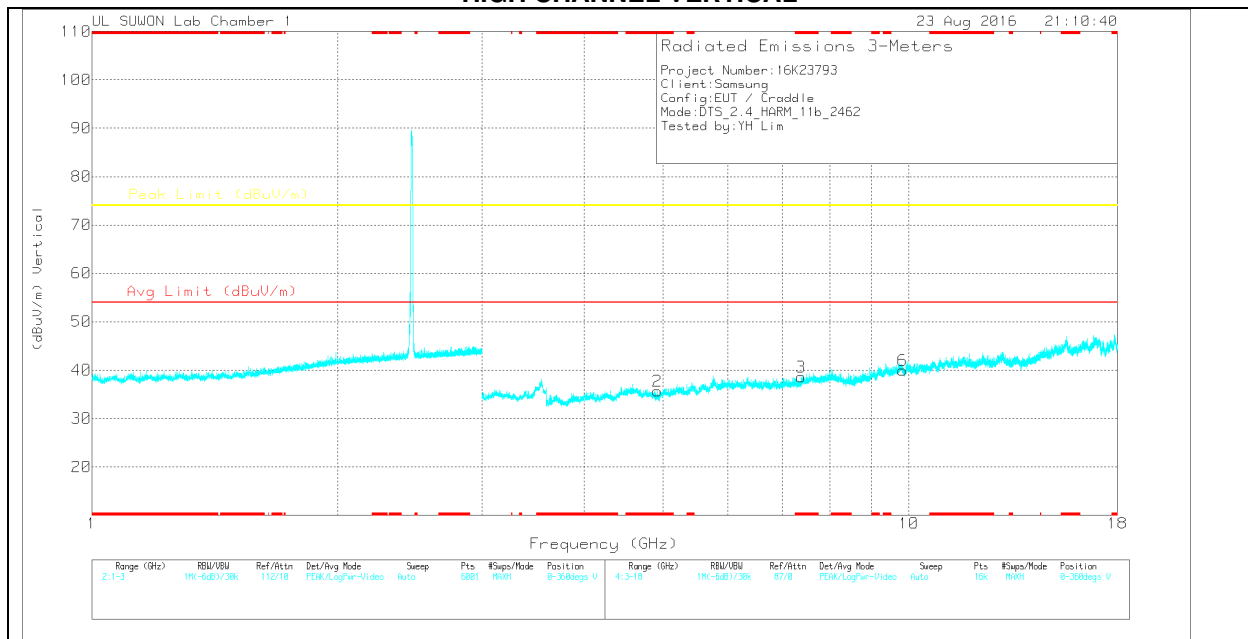

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_3	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.914	35.19	PK	34	-34	0	35.19	-	-	74	-38.81	0-360	150	H
4	* 7.385	33	PK	35.8	-30.7	0	38.1	-	-	74	-35.9	0-360	150	H
5	9.837	30.82	PK	37.3	-27.3	0	40.82	-	-	74	-33.18	0-360	150	H
2	* 4.919	35.71	PK	34	-34	0	35.71	-	-	74	-38.29	0-360	250	V
3	* 7.382	33.63	PK	35.8	-30.8	0	38.63	-	-	74	-35.37	0-360	150	V
6	9.831	29.93	PK	37.3	-27.2	0	40.03	-	-	74	-33.97	0-360	150	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

### 11.2.2. TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND

#### RESTRICTED BANDEDGE (LOW CHANNEL)

#### HORIZONTAL PEAK AND AVERAGE PLOT

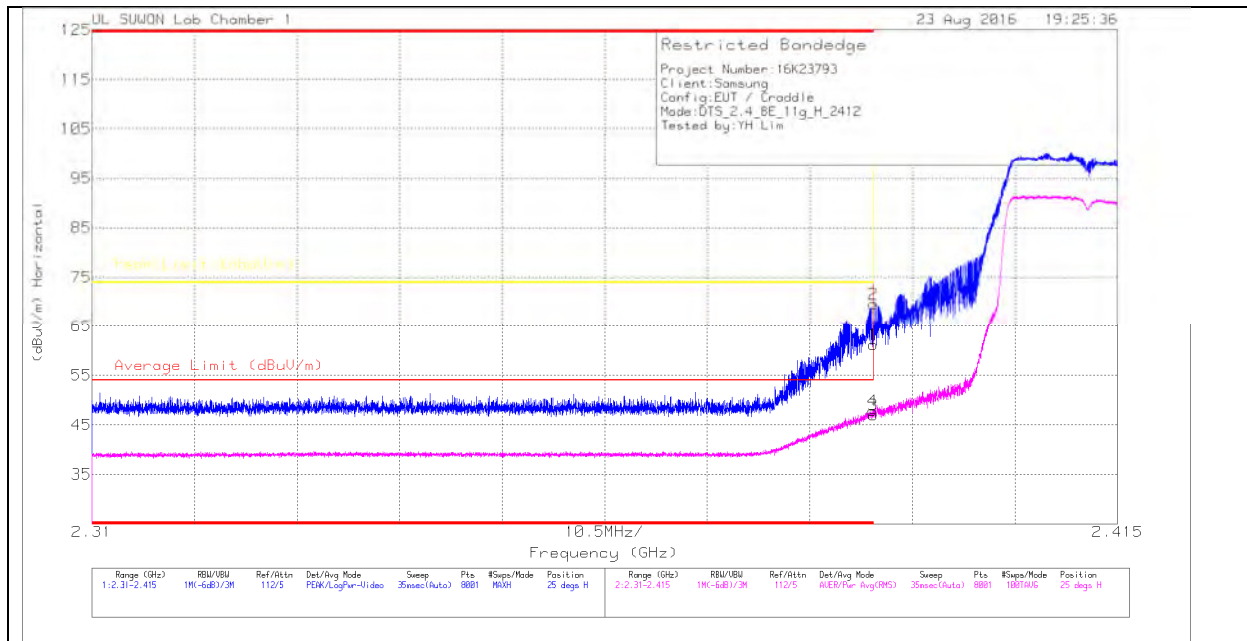

#### HORIZONTAL DATA

##### Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17_150619)	Path_2	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	58.39	PK	31.8	-29	0	61.19	-	-	74	-12.81	25	260	H
2	* 2.39	66.8	PK	31.8	-29	0	69.6	-	-	74	-4.4	25	260	H
3	* 2.39	43.87	RMS	31.8	-29	.32	46.99	54	-7.01	-	-	25	260	H
4	* 2.39	44.73	RMS	31.8	-29	.32	47.85	54	-6.15	-	-	25	260	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

**VERTICAL PEAK AND AVERAGE PLOT**

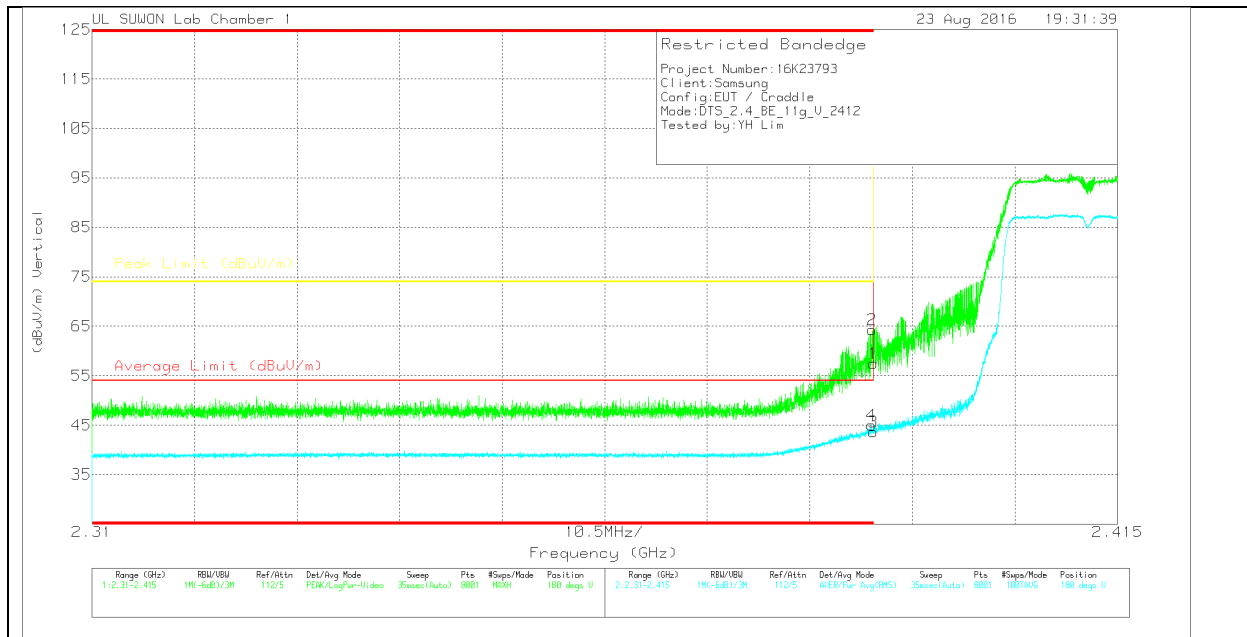

**VERTICAL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17_150619)	Path_2	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	54.67	Pk	31.8	-29	0	57.47	-	-	74	-16.53	180	200	V
2	* 2.39	61.48	Pk	31.8	-29	0	64.28	-	-	74	-9.72	180	200	V
3	* 2.39	40.54	RMS	31.8	-29	.32	43.66	54	-10.34	-	-	180	200	V
4	* 2.39	41.87	RMS	31.8	-29	.32	44.99	54	-9.01	-	-	180	200	V


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

**AUTHORIZED BANDEDGE (HIGH CHANNEL)**

**HORIZONTAL PEAK AND AVERAGE PLOT**

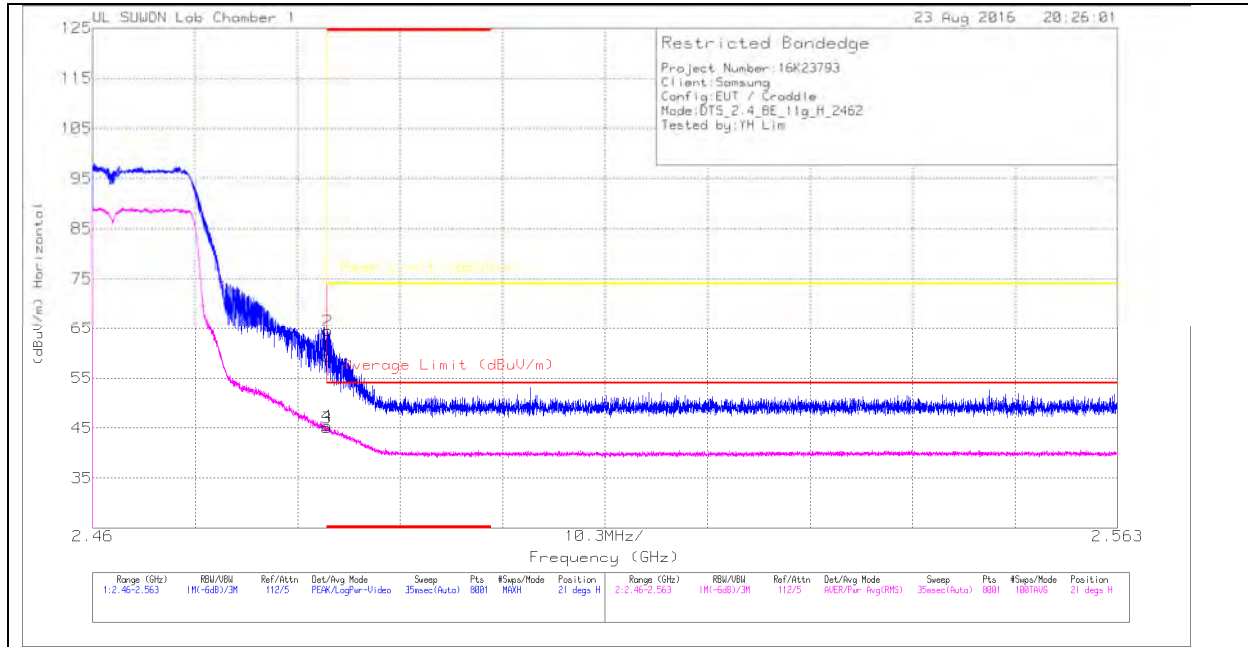

**HORIZONTAL DATA**

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17_150619)	Path_2	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	55.64	PK	32	-28.3	0	59.34	-	-	74	-14.66	21	275	H
2	* 2.484	60.8	PK	32	-28.3	0	64.5	-	-	74	-9.5	21	275	H
3	* 2.484	41	RMS	32	-28.3	.32	45.02	54	-8.98	-	-	21	275	H
4	* 2.484	41.38	RMS	32	-28.3	.32	45.4	54	-8.6	-	-	21	275	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

**VERTICAL PEAK AND AVERAGE PLOT**

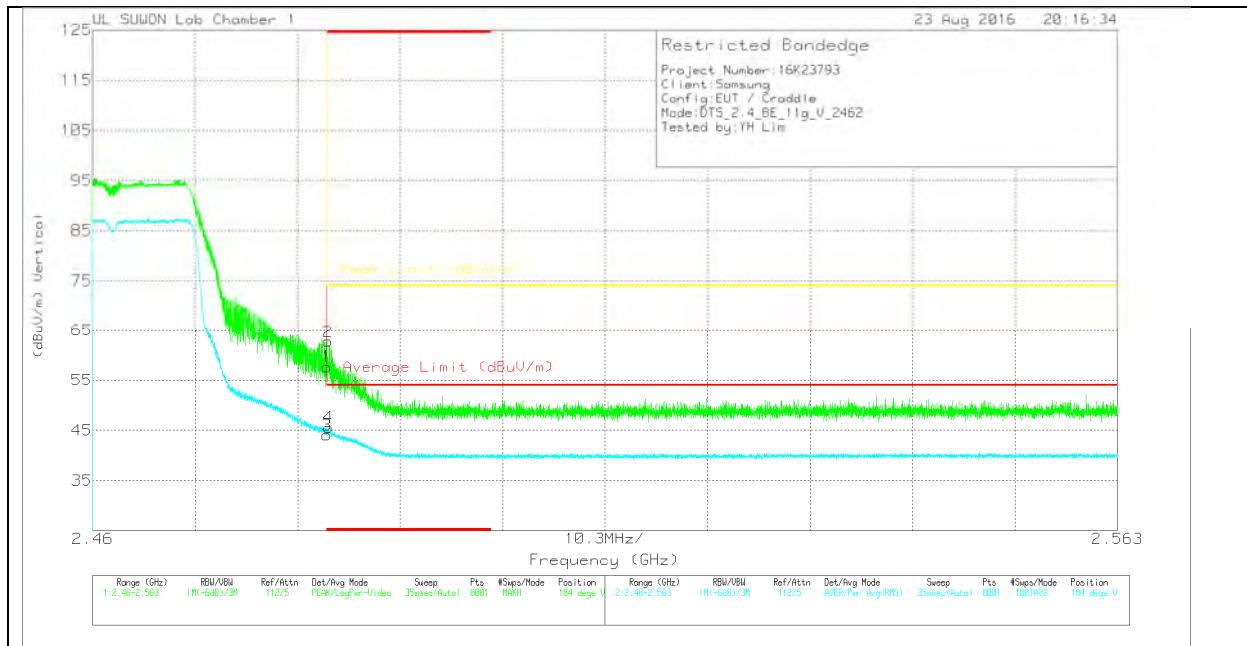

**VERTICAL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_2	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	53.97	PK	32	-28.3	0	57.67	-	-	74	-16.33	184	100	V
2	* 2.484	59.02	PK	32	-28.3	0	62.72	-	-	74	-11.28	184	100	V
3	* 2.484	40.06	RMS	32	-28.3	.32	44.08	54	-9.92	-	-	184	100	V
4	* 2.484	41.56	RMS	32	-28.3	.32	45.58	54	-8.42	-	-	184	100	V


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


RMS - RMS detection

### HARMONICS AND SPURIOUS EMISSIONS

#### LOW CHANNEL HORIZONTAL

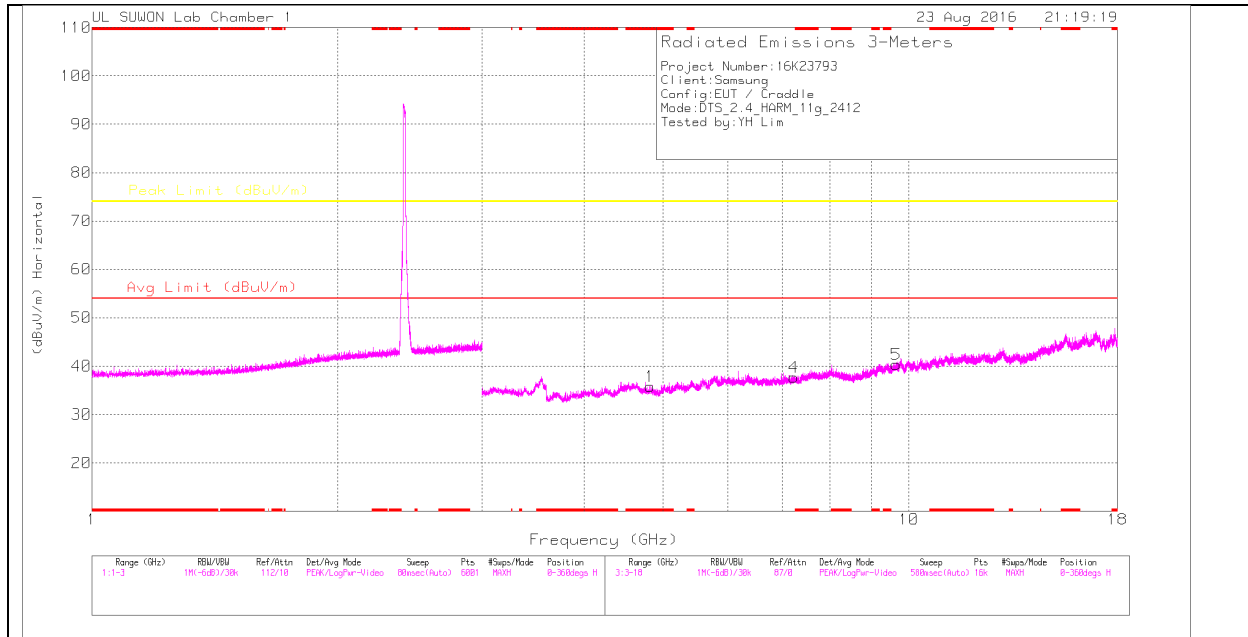

#### LOW CHANNEL VERTICAL

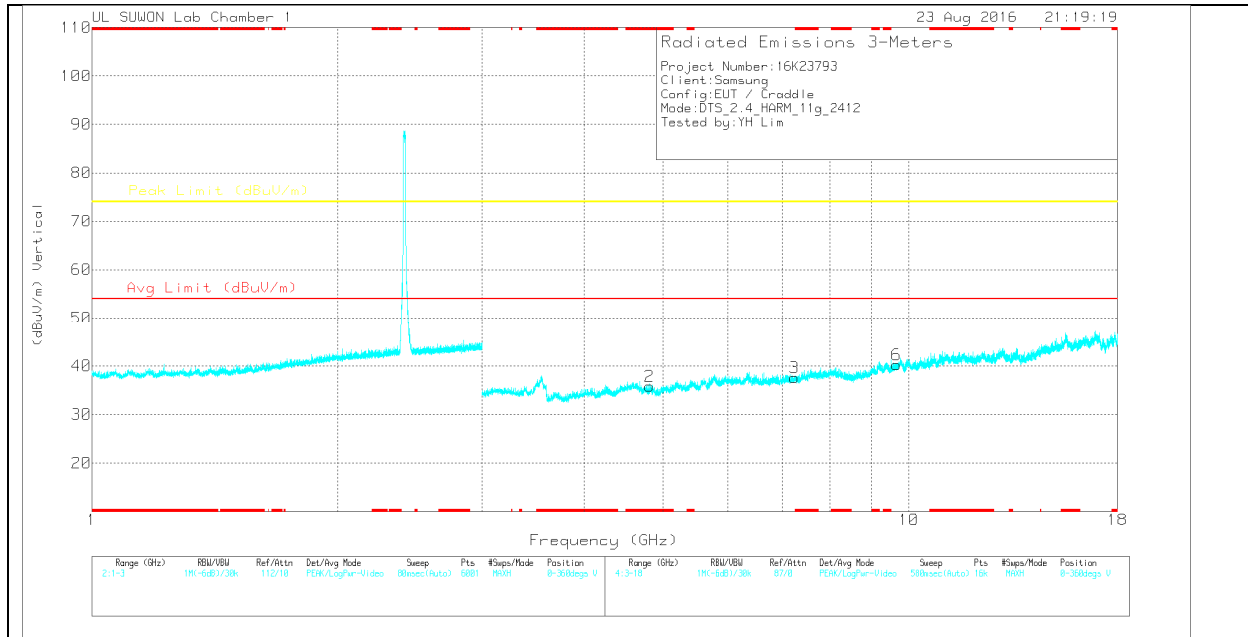

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL DATA**

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_3	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.82	35.62	PK	34	-33.8	0	35.82	-	-	74	-38.18	0-360	250	H
4	7.233	32.95	PK	35.7	-30.9	0	37.75	-	-	74	-36.25	0-360	150	H
5	9.647	30.61	PK	37.1	-27.4	0	40.31	-	-	74	-33.69	0-360	150	H
2	* 4.817	35.65	PK	34	-33.8	0	35.85	-	-	74	-38.15	0-360	150	V
3	7.235	32.81	PK	35.7	-30.9	0	37.61	-	-	74	-36.39	0-360	250	V
6	9.653	30.59	PK	37.1	-27.5	0	40.19	-	-	74	-33.81	0-360	150	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

**MID CHANNEL HORIZONTAL**

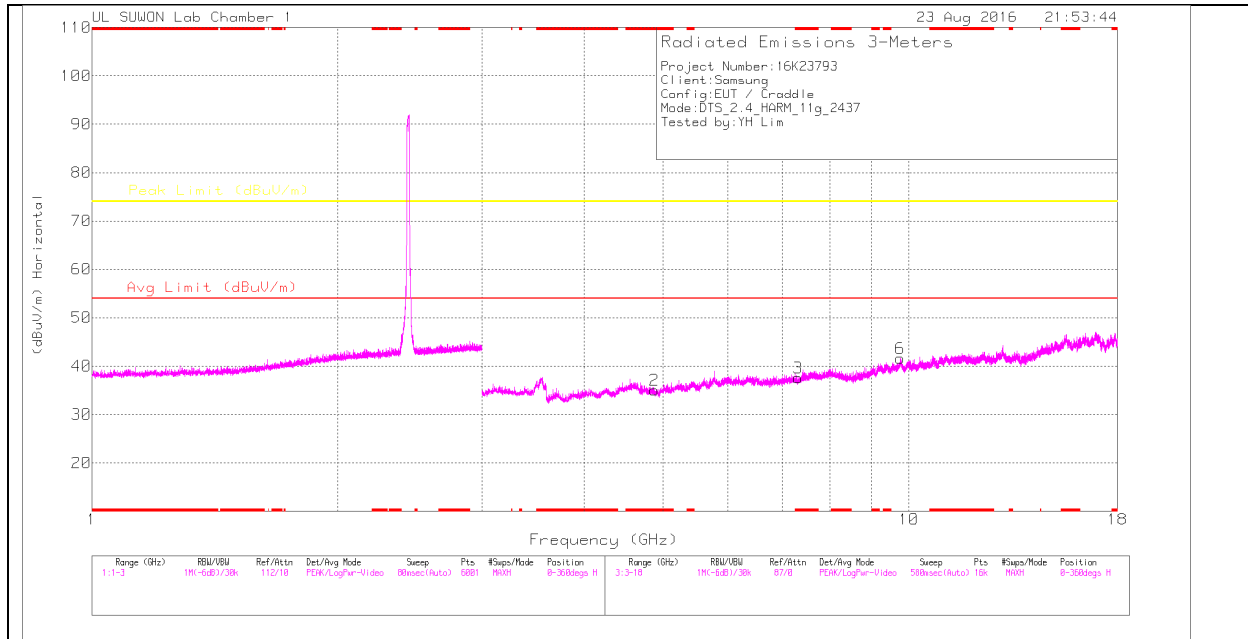

**MID CHANNEL VERTICAL**

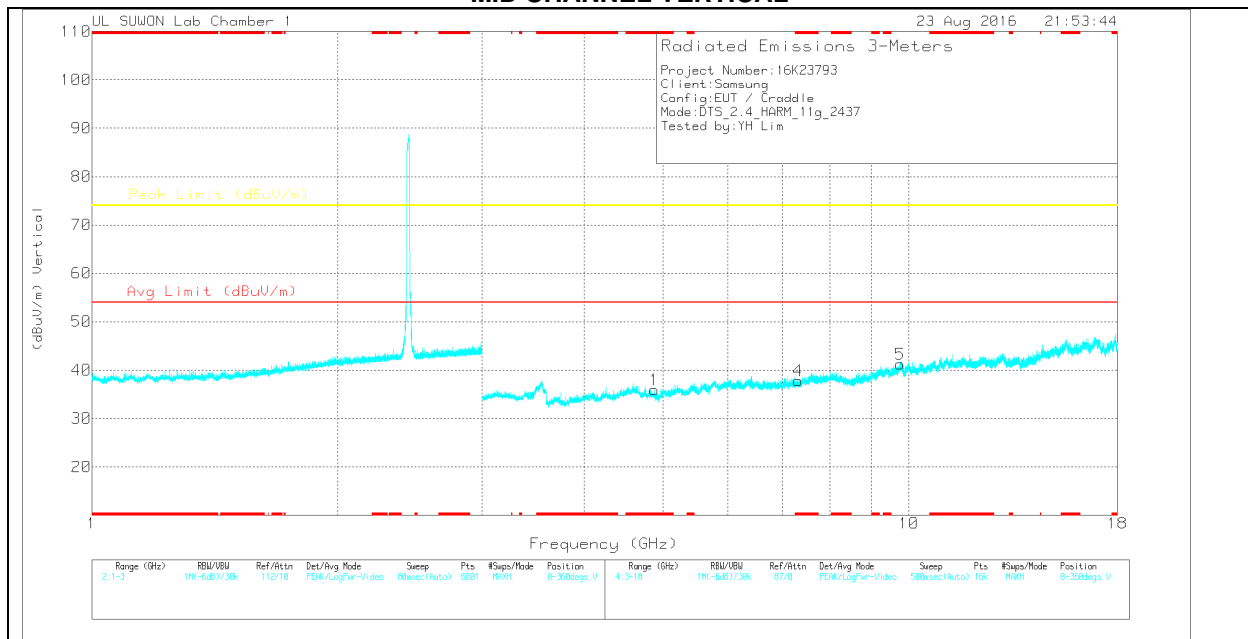

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL DATA**

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_3	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 4.881	35.05	Pk	34	-34	0	35.05	-	-	74	-38.95	0-360	250	H
3	* 7.313	32.7	Pk	35.8	-30.9	0	37.6	-	-	74	-36.4	0-360	150	H
6	9.754	31.13	Pk	37.2	-26.7	0	41.63	-	-	74	-32.37	0-360	150	H
1	* 4.878	35.95	Pk	34	-34	0	35.95	-	-	74	-38.05	0-360	250	V
4	* 7.318	32.9	Pk	35.8	-30.9	0	37.8	-	-	74	-36.2	0-360	150	V
5	9.75	30.87	Pk	37.2	-26.8	0	41.27	-	-	74	-32.73	0-360	150	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


Pk – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

### HIGH CHANNEL HORIZONTAL

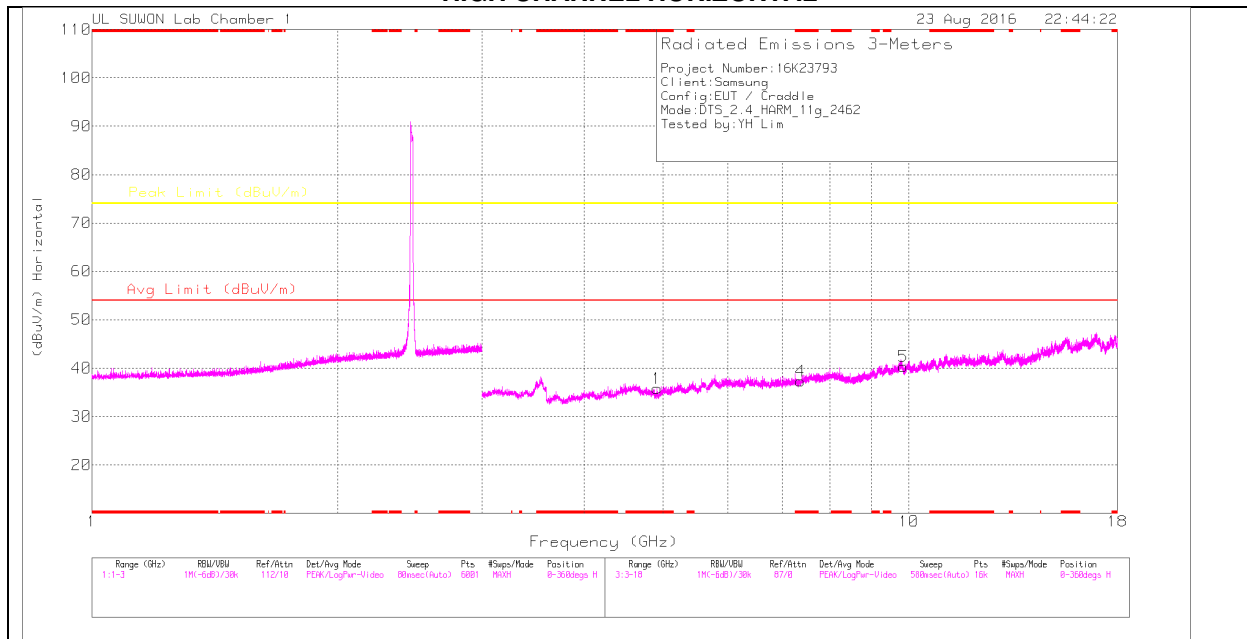

### HIGH CHANNEL VERTICAL

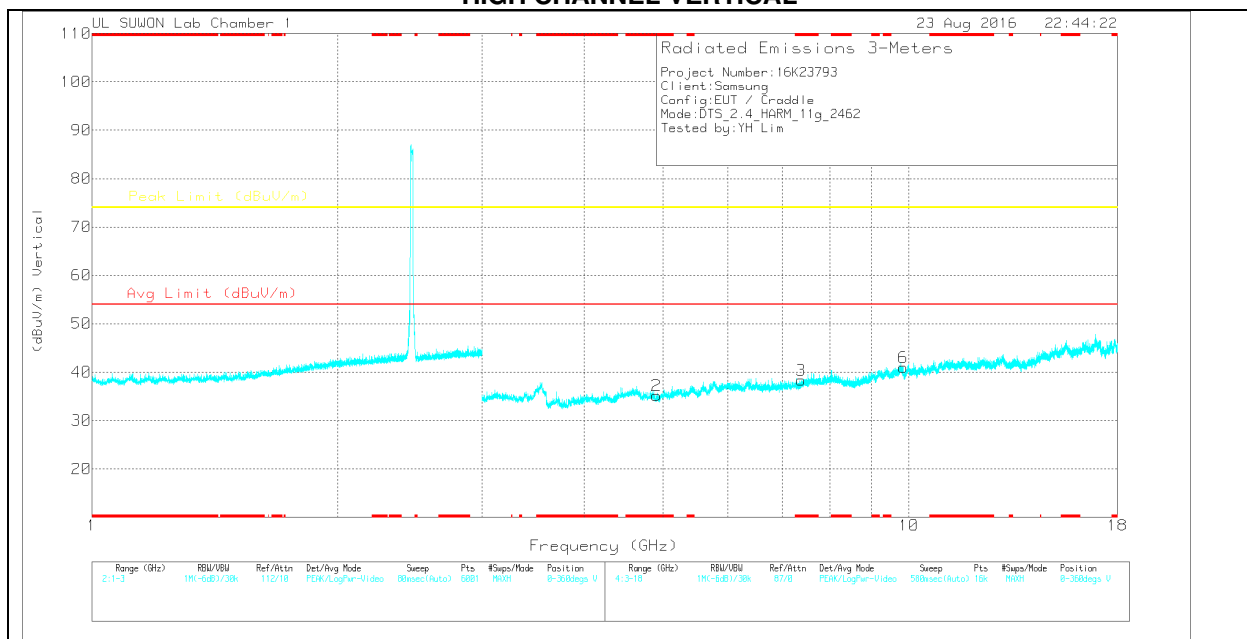

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_3	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.918	35.77	Pk	34	-34	0	35.77	-	-	74	-38.23	0-360	150	H
4	* 7.372	32.37	Pk	35.8	-30.8	0	37.37	-	-	74	-36.63	0-360	250	H
5	9.836	30.4	Pk	37.3	-27.3	0	40.4	-	-	74	-33.6	0-360	250	H
2	* 4.91	35.17	Pk	34	-34	0	35.17	-	-	74	-38.83	0-360	150	V
3	* 7.379	33.39	Pk	35.8	-30.8	0	38.39	-	-	74	-35.61	0-360	250	V
6	9.835	31	Pk	37.3	-27.3	0	41	-	-	74	-33	0-360	250	V


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

### 11.2.3. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 2.4 GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

#### HORIZONTAL PEAK AND AVERAGE PLOT

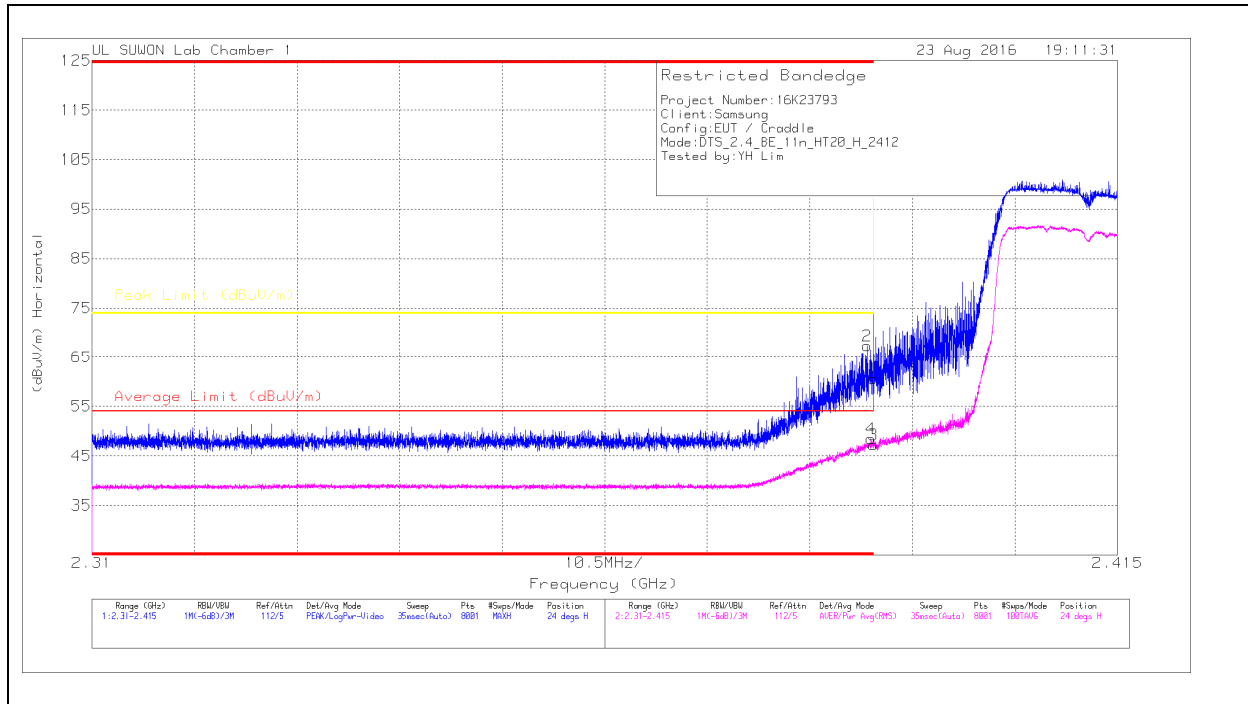

#### HORIZONTAL DATA

##### Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17_150619)	Path_2	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	57.8	PK		-29	0	60.6	-	-	74	-13.4	24	260	H
2	* 2.389	64.64	PK		-29	0	67.44	-	-	74	-6.56	24	260	H
3	* 2.39	44.1	RMS		-29	.34	47.24	54	-6.76	-	-	24	260	H
4	* 2.39	45.28	RMS		-29	.34	48.42	54	-5.58	-	-	24	260	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

**VERTICAL PEAK AND AVERAGE PLOT**

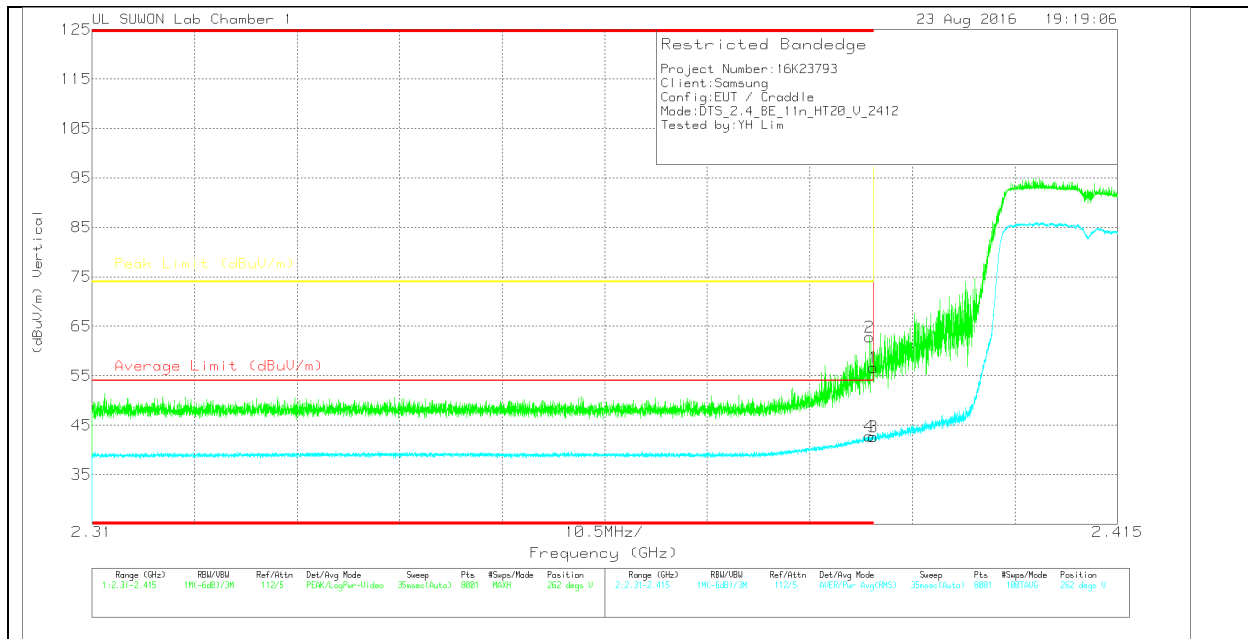

**VERTICAL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_2	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	53.78	Pk			0	56.58	-	-	74	-17.42	262	400	V
2	* 2.39	59.99	Pk			0	62.79	-	-	74	-11.21	262	400	V
3	* 2.39	39.53	RMS			.34	42.67	54	-11.33	-	-	262	400	V
4	* 2.39	39.67	RMS			.34	42.81	54	-11.19	-	-	262	400	V


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

**AUTHORIZED BANDEDGE (HIGH CHANNEL)**

**HORIZONTAL PEAK AND AVERAGE PLOT**

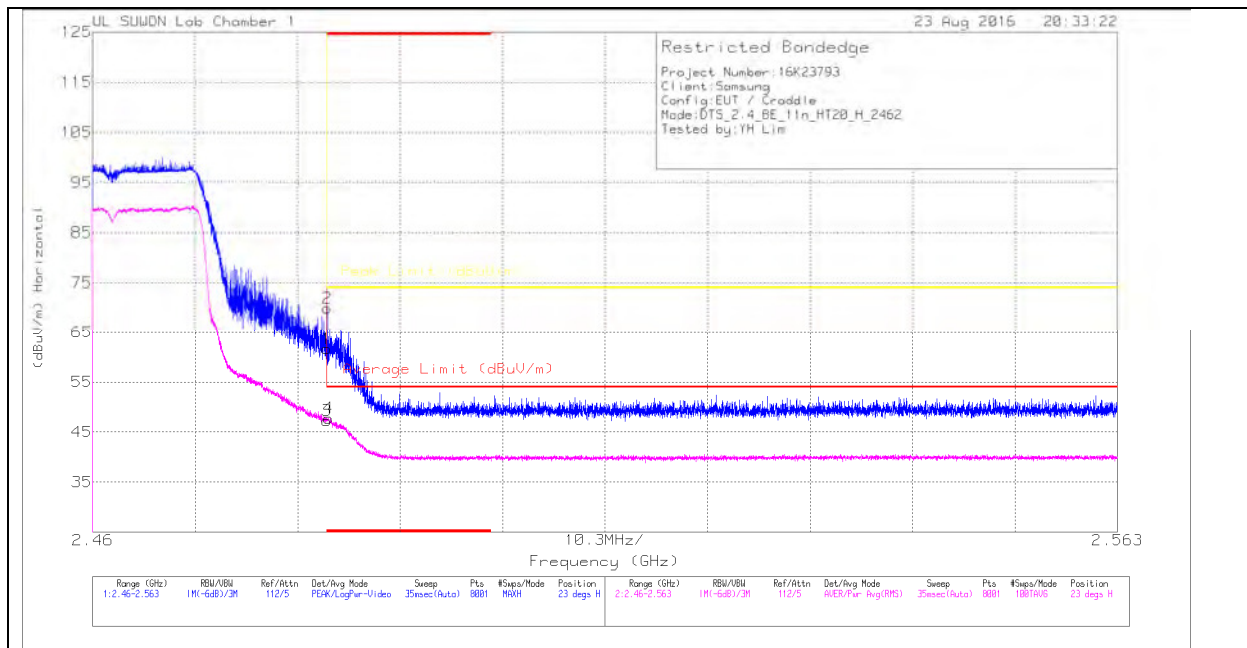

**HORIZONTAL DATA**

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17_150619)	Path_2	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	57.94	PK	32	-28.3	0	61.64	-	-	74	-12.36	23	273	H
2	* 2.484	66.26	PK	32	-28.3	0	69.96	-	-	74	-4.04	23	273	H
3	* 2.484	43.26	RMS	32	-28.3	.34	47.3	54	-6.7	-	-	23	273	H
4	* 2.484	43.75	RMS	32	-28.3	.34	47.79	54	-6.21	-	-	23	273	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

**VERTICAL PEAK AND AVERAGE PLOT**

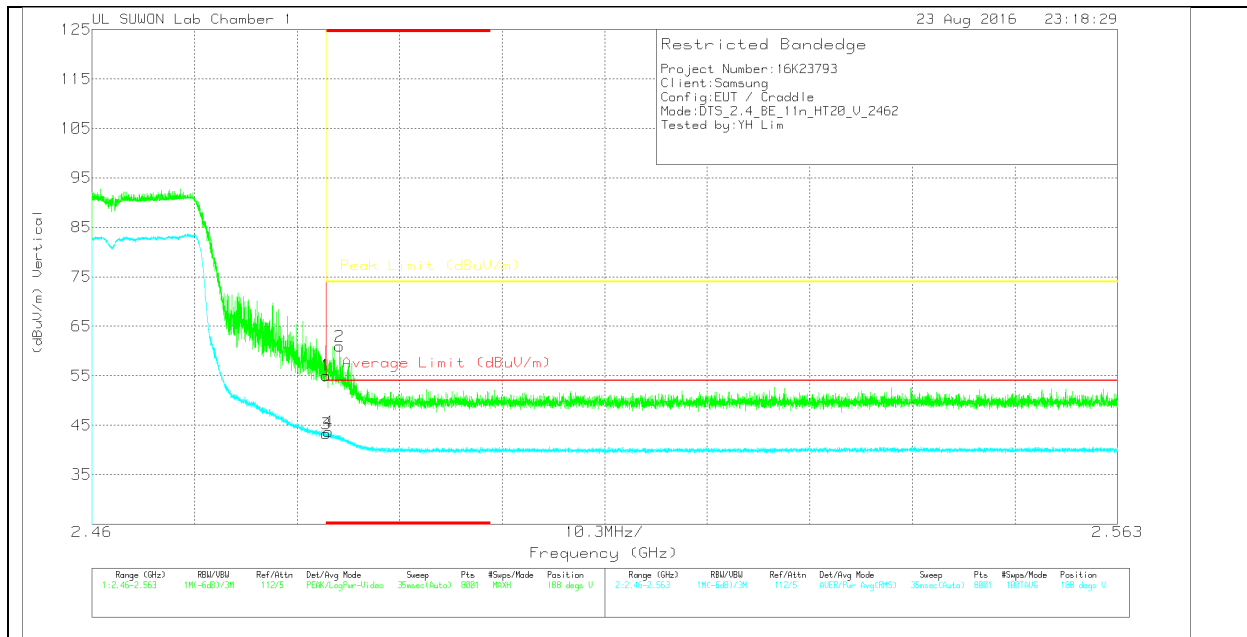

**VERTICAL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17_150619)	Path_2	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	51.39	Pk	32	-28.3	0	55.09	-	-	74	-18.91	188	120	V
2	* 2.485	57.32	Pk	32	-28.3	0	61.02	-	-	74	-12.98	188	120	V
3	* 2.484	39.29	RMS	32	-28.3	.34	43.33	54	-10.67	-	-	188	120	V
4	* 2.484	39.56	RMS	32	-28.3	.34	43.6	54	-10.4	-	-	188	120	V


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector


RMS - RMS detection

## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL HORIZONTAL

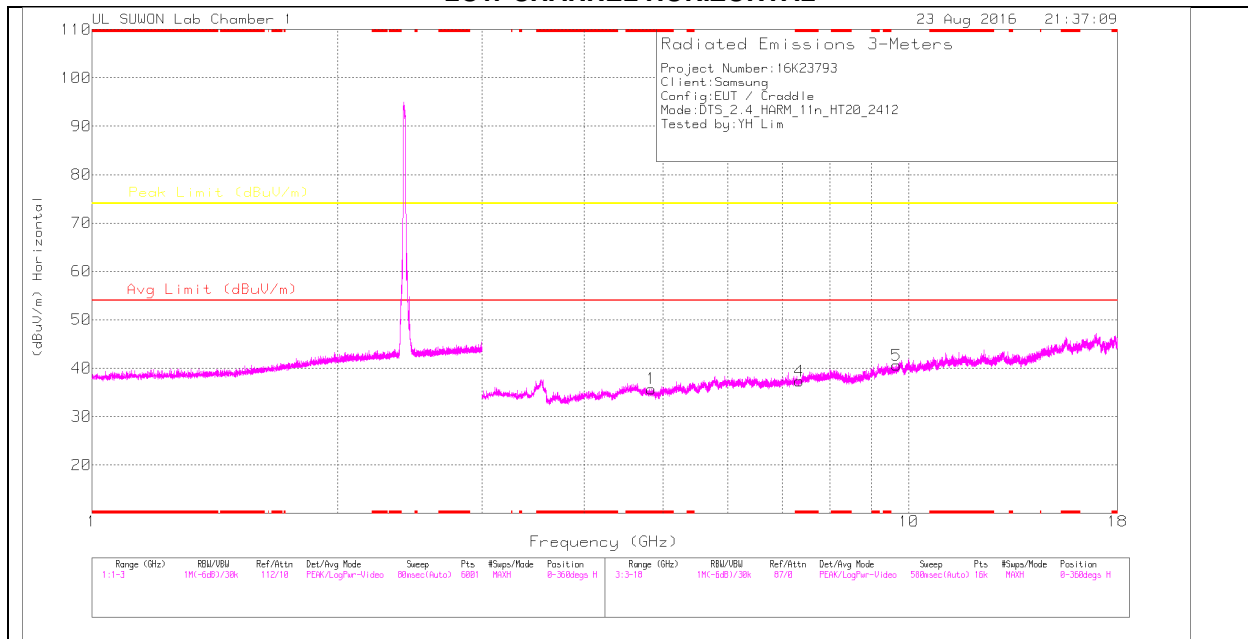

### LOW CHANNEL VERTICAL

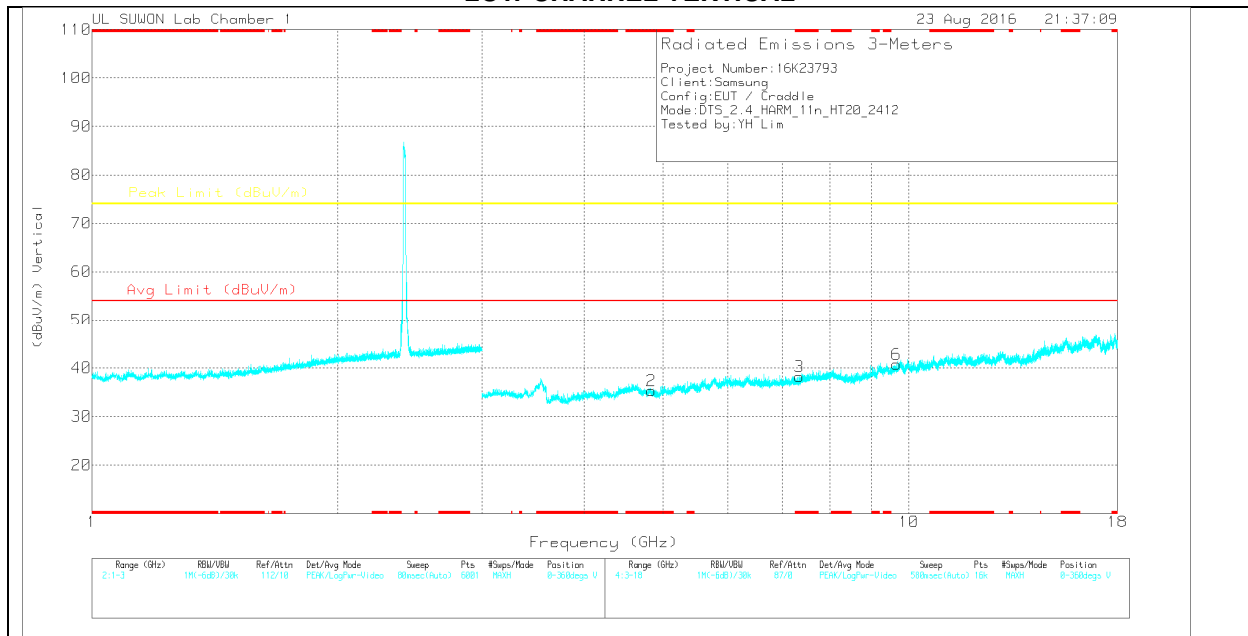

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL DATA**

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_3	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.837	35.65	Pk	34	-33.9	0	35.75	-	-	74	-38.25	0-360	250	H
4	* 7.342	32.35	Pk	35.8	-30.8	0	37.35	-	-	74	-36.65	0-360	150	H
5	9.651	30.89	Pk	37.1	-27.4	0	40.59	-	-	74	-33.41	0-360	150	H
2	* 4.84	35.17	Pk	34	-33.9	0	35.27	-	-	74	-38.73	0-360	250	V
3	* 7.348	33.16	Pk	35.8	-30.8	0	38.16	-	-	74	-35.84	0-360	150	V
6	9.651	31.03	Pk	37.1	-27.4	0	40.73	-	-	74	-33.27	0-360	150	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


Pk – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

**MID CHANNEL HORIZONTAL**

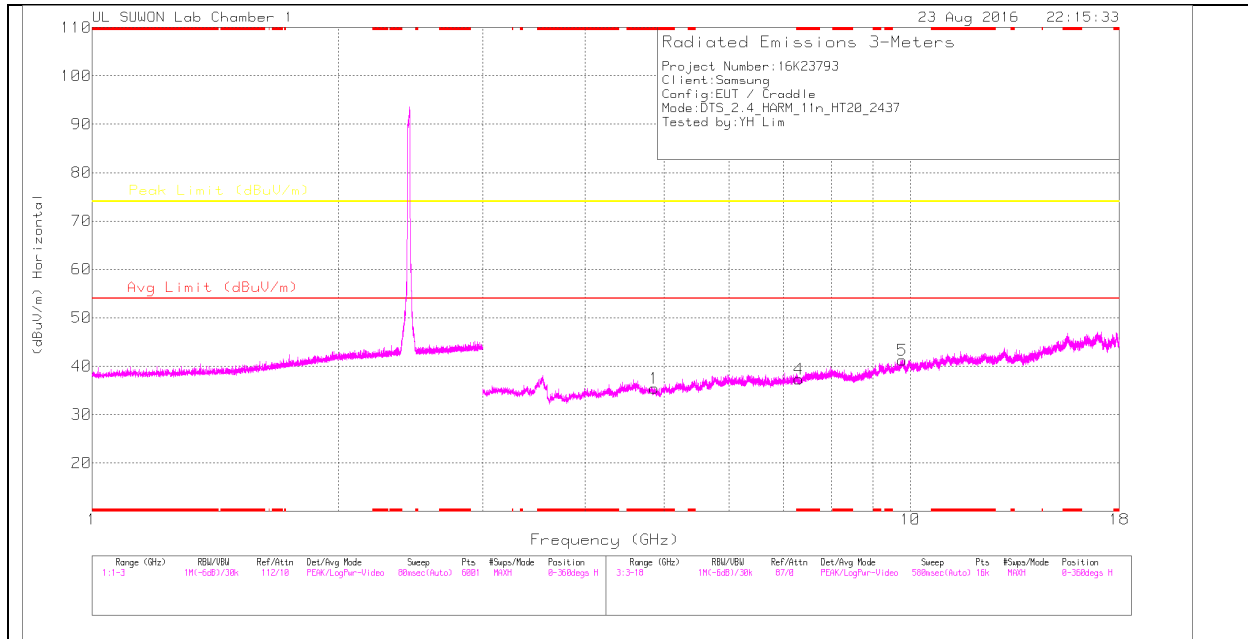

**MID CHANNEL VERTICAL**

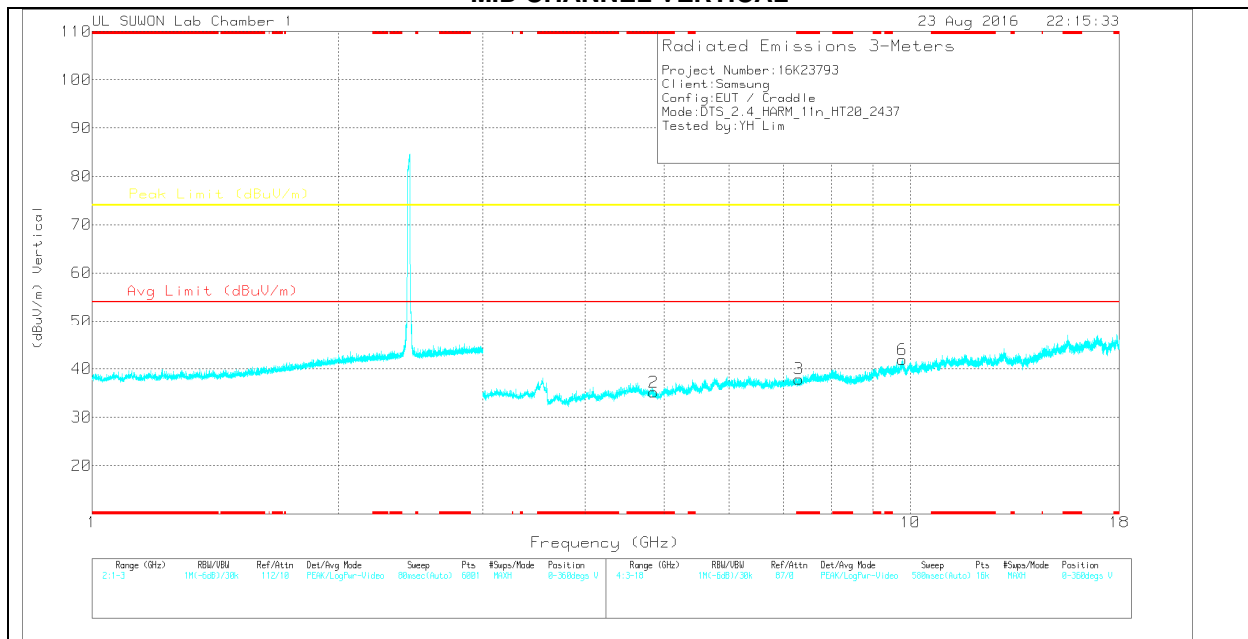

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL DATA**

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_3	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.866	35.41	Pk	34	-34	0	35.41	-	-	74	-38.59	0-360	250	H
4	* 7.302	32.48	Pk	35.7	-30.9	0	37.28	-	-	74	-36.72	0-360	150	H
5	9.778	30.5	Pk	37.2	-26.4	0	41.3	-	-	74	-32.7	0-360	150	H
2	* 4.859	35.21	Pk	34	-34	0	35.21	-	-	74	-38.79	0-360	150	V
3	* 7.301	33.1	Pk	35.7	-30.9	0	37.9	-	-	74	-36.1	0-360	250	V
6	9.78	31.16	Pk	37.2	-26.5	0	41.86	-	-	74	-32.14	0-360	250	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


Pk – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

### HIGH CHANNEL HORIZONTAL

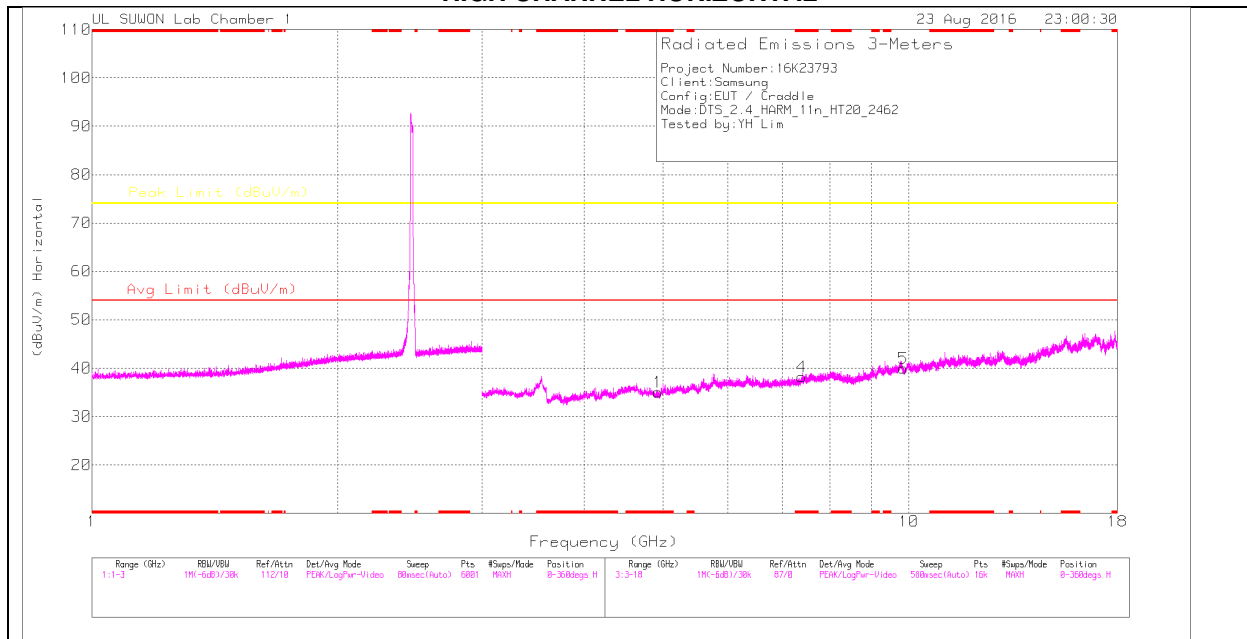

### HIGH CHANNEL VERTICAL

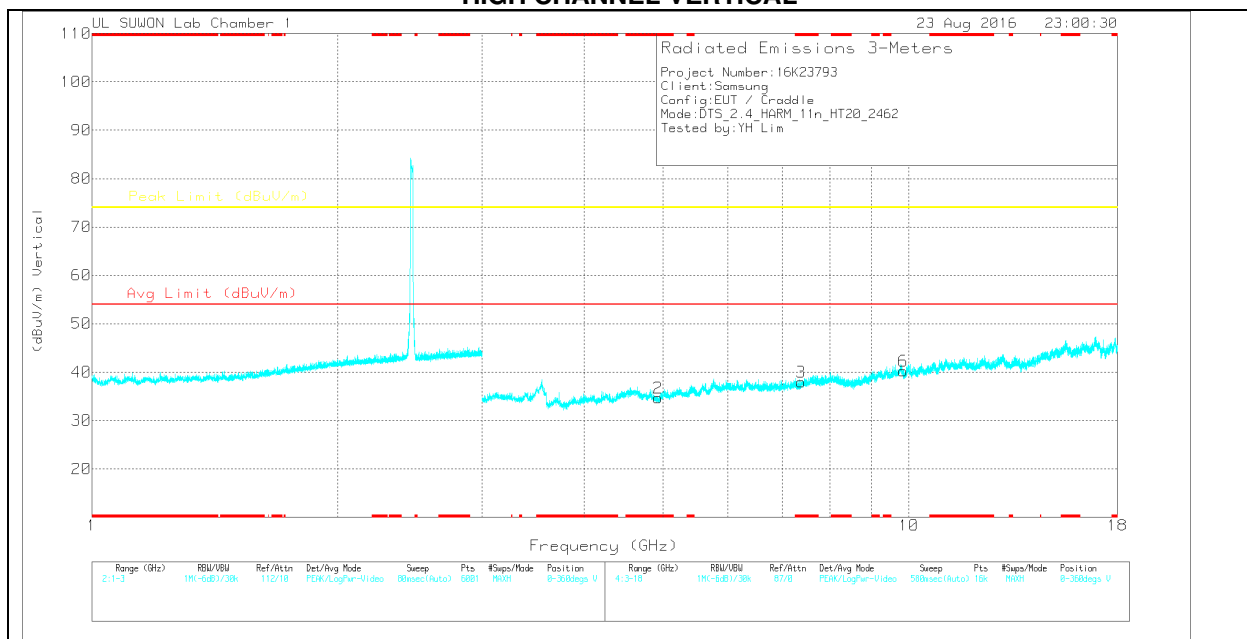

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_3	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.929	35.05	Pk	34	-34	0	35.05	-	-	74	-38.95	0-360	150	H
4	* 7.388	33.07	Pk	35.8	-30.7	0	38.17	-	-	74	-35.83	0-360	250	H
5	9.849	30.3	Pk	37.3	-27.6	0	40	-	-	74	-34	0-360	250	H
2	* 4.927	34.72	Pk	34	-34	0	34.72	-	-	74	-39.28	0-360	150	V
3	* 7.385	32.86	Pk	35.8	-30.7	0	37.96	-	-	74	-36.04	0-360	150	V
6	9.842	30.45	Pk	37.3	-27.5	0	40.25	-	-	74	-33.75	0-360	150	V


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk – Peak detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

### 11.3. WORST-CASE BELOW 1 GHz

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

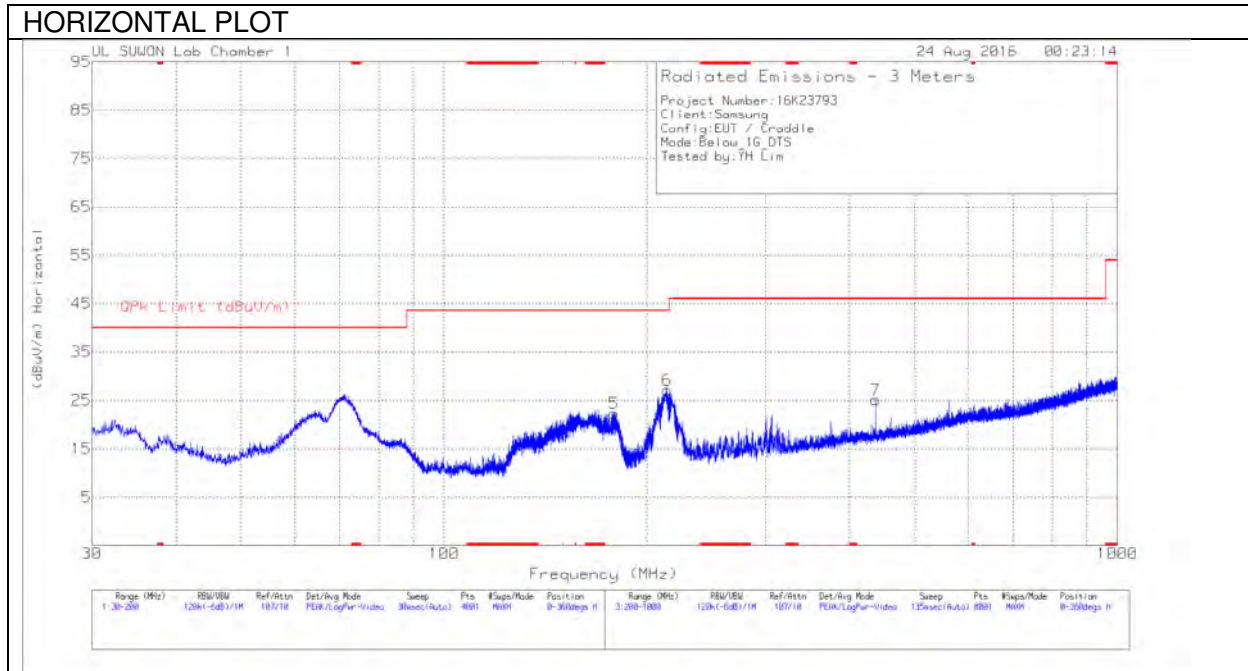

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

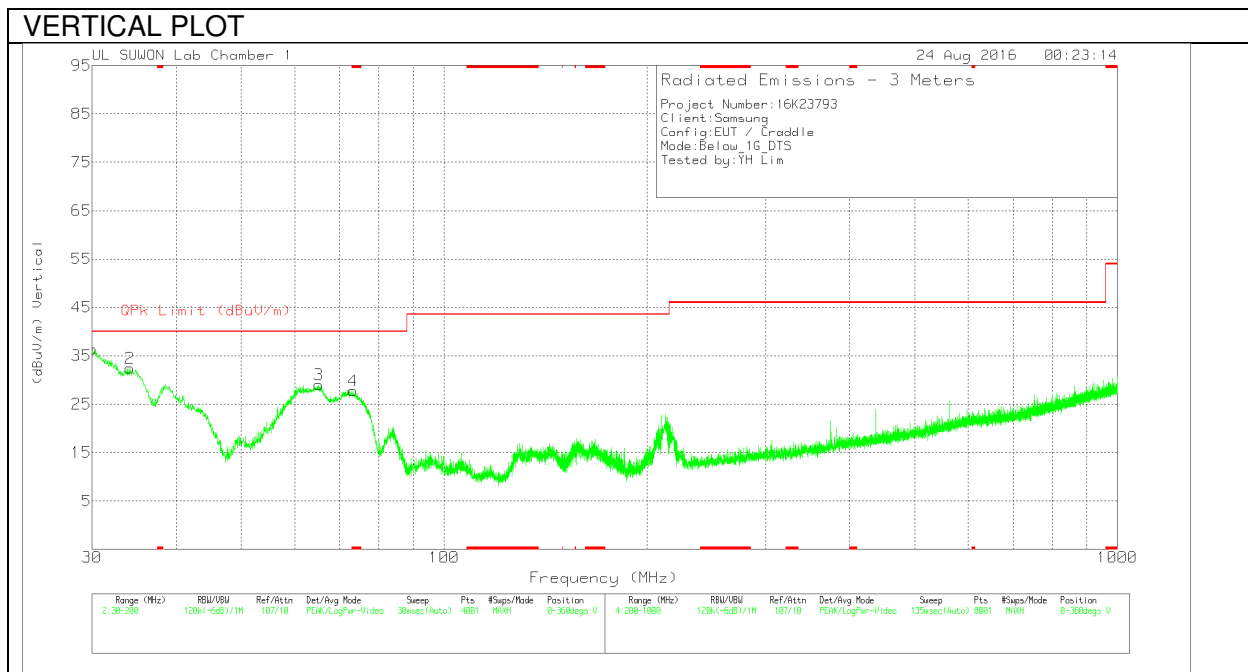

**Below 1G Data**

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163-750	Bi-Log	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	178.7925	41.25	Pk	9.4	-28.3	22.35	43.52	-21.17	0-360	200	H
1	30.0425	56.57	Pk	10.3	-30.5	36.37	40	-3.63	0-360	100	V
2	34.165	52.43	Pk	10.4	-30.4	32.43	40	-7.57	0-360	100	V
3	65.1475	47.86	Pk	11.1	-29.9	29.06	40	-10.94	0-360	100	V
4	* 73.18	48.69	Pk	8.8	-29.7	27.79	40	-12.21	0-360	100	V
6	214.3	43.51	Pk	11.6	-28	27.11	43.52	-16.41	0-360	200	H
7	437.5	35.63	Pk	16.1	-26.6	25.13	46.02	-20.89	0-360	200	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

Radiated Emissions

Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163-750	Bi-Log	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
30.0138	54.6	Qp	10.3	-30.5	34.4	40	-5.6	230	110	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Qp - Quasi-Peak detector

## 12. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

**RESULTS**

**WORST EMISSIONS**

**LINE 1 PLOT**

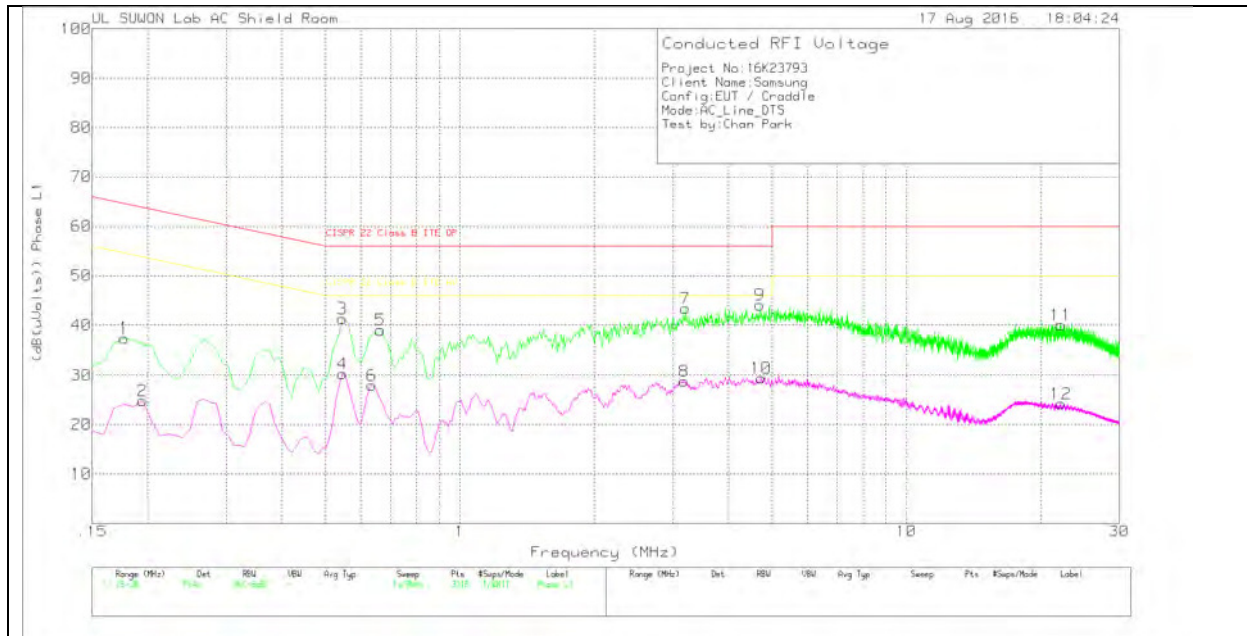

**LINE 1 RESULTS**


Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101837_w ith ex-cord_L1	CE Shield Room	Corrected Reading (dB(uVolts))	CISPR 22 Class B ITE QP	Margin (dB)	CISPR 22 Class B ITE AV	Margin (dB)
1	.177	27.24	Pk	10.2	0	37.44	64.63	-27.19	-	-
2	.195	14.87	Av	10	0	24.87	-	-	53.82	-28.95
3	.546	31.24	Pk	10.1	0	41.34	56	-14.66	-	-
4	.546	20.19	Av	10.1	0	30.29	-	-	46	-15.71
5	.663	28.91	Pk	10.1	0	39.01	56	-16.99	-	-
6	.636	17.84	Av	10.1	0	27.94	-	-	46	-18.06
7	3.201	33.52	Pk	9.8	.1	43.42	56	-12.58	-	-
8	3.183	18.93	Av	9.8	.1	28.83	-	-	46	-17.17
9	4.695	34.17	Pk	9.8	.1	44.07	56	-11.93	-	-
10	4.731	19.52	Av	9.8	.1	29.42	-	-	46	-16.58
11	22.191	29.31	Pk	10.5	.2	40.01	60	-19.99	-	-
12	22.191	13.49	Av	10.5	.2	24.19	-	-	50	-25.81

Pk - Peak detector

Av - Average detection

**LINE 2 PLOT**

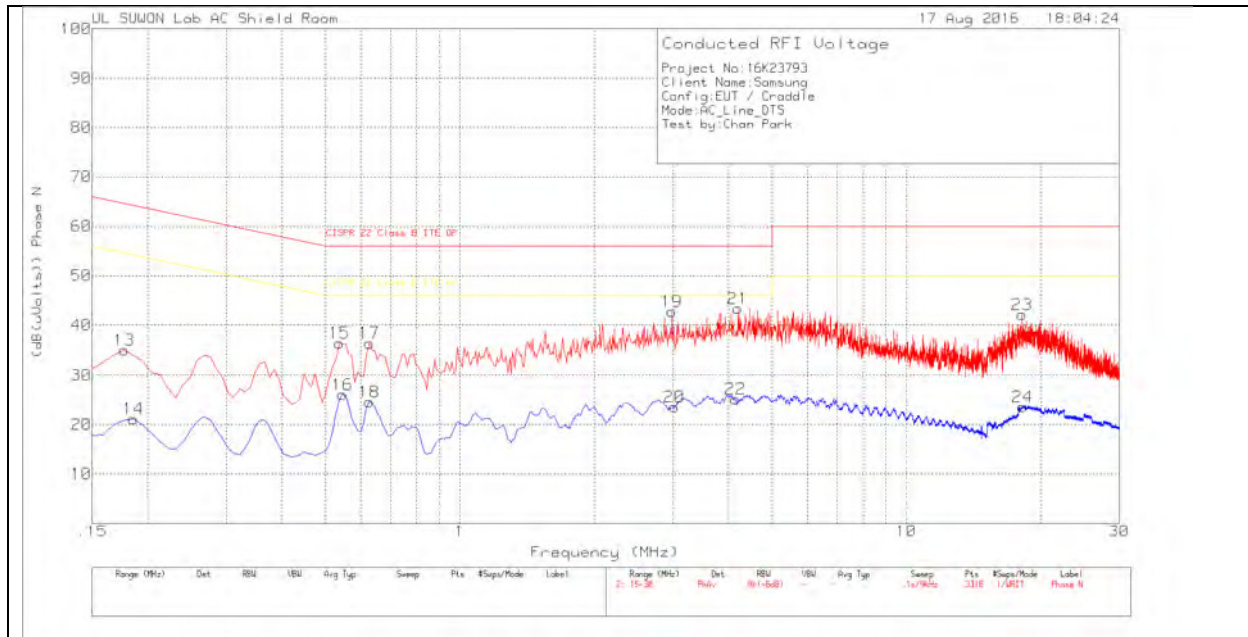

**LINE 2 RESULTS**

Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101837_w ith ex-cord_N	CE Shield Room	Corrected Reading (dB(uVolts))	CISPR 22 Class B ITE QP	Margin (dB)	CISPR 22 Class B ITE AV	Margin (dB)
13	.177	24.95	Pk	10.1	0	35.05	64.63	-29.58	-	-
14	.186	11.18	Av	10	0	21.18	-	-	54.21	-33.03
15	.537	26.4	Pk	10.1	0	36.5	56	-19.5	-	-
16	.546	16	Av	10.1	0	26.1	-	-	46	-19.9
17	.627	26.31	Pk	10.1	0	36.41	56	-19.59	-	-
18	.627	14.47	Av	10.1	0	24.57	-	-	46	-21.43
19	2.985	32.91	Pk	9.8	.1	42.81	56	-13.19	-	-
20	3.021	13.69	Av	9.8	.1	23.59	-	-	46	-22.41
21	4.2	33.44	Pk	9.8	.1	43.34	56	-12.66	-	-
22	4.146	15.34	Av	9.8	.1	25.24	-	-	46	-20.76
23	18.159	31.4	Pk	10.5	.2	42.1	60	-17.9	-	-
24	18.213	12.84	Av	10.5	.2	23.54	-	-	50	-26.46

Pk - Peak detector

Av - Average detection