



FCC CFR47 PART 15 SUBPART C

Bluetooth

C2PC CERTIFICATION TEST REPORT

FOR

LTE Watch + Bluetooth/BLE and DTS b/g/n

MODEL NUMBER : SM-R775S

FCC ID: A3LSMR775S

REPORT NUMBER: 4787686874-E3V1

ISSUE DATE: NOV 23, 2016

Prepared for
SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Prepared by
UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	11/23/16	Initial issue	Junwhan Lee

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. MEASURING INSTRUMENT CALIBRATION	5
4.2. SAMPLE CALCULATION	5
4.3. MEASUREMENT UNCERTAINTY	5
5. EQUIPMENT UNDER TEST	6
5.1. DESCRIPTION OF EUT	6
5.2. MAXIMUM OUTPUT POWER	6
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	6
5.4. WORST-CASE CONFIGURATION AND MODE	6
5.5. DESCRIPTION OF TEST SETUP	7
6. TEST AND MEASUREMENT EQUIPMENT	9
7. SUMMARY TABLE	10
8. RADIATED TEST RESULTS	11
8.1. LIMITS AND PROCEDURE	11
8.2. TRANSMITTER ABOVE 1 GHz	13
8.2.1. BASIC DATA RATE GFSK MODULATION	13
8.2.2. ENHANCED DATA RATE 8PSK MODULATION	23
8.3. WORST-CASE BELOW 1 GHz	33
9. AC POWER LINE CONDUCTED EMISSIONS	35
10. SETUP PHOTOS	40

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: LTE Watch + Bluetooth/BLE and DTS b/g/n
MODEL NUMBER: SM-R775S
SERIAL NUMBER: R3AHB004RX, R3AHB004RL(RADIATED)
DATE TESTED: NOV 14, 2016 - NOV 22, 2016

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



CY Choi
Suwon Lab Engineer
UL Korea, Ltd.

Tested By:



Junwhan Lee
Suwon Lab Engineer
UL Korea, Ltd.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
☒	Chamber 1
☒	Chamber 2

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	4.14 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a LTE Watch + Bluetooth/BLE and DTS b/g/n.
This test report addresses the DSS (BT) operational mode.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range [MHz]	Mode	Power Mode	Output Power [dBm]	Output Power [mW]
2402 - 2480	Basic GFSK	Average	14.459	27.919
		Peak	14.707	29.560
	Enhanced Pi/4-DPSK	Average	8.489	7.062
		Peak	11.391	13.775
	Enhanced 8PSK	Average	8.557	7.173
		Peak	11.926	15.581

**Note: Conducted output power data is from test result of original filing.
(FCC ID: A3LSMR775S, TEST REPORT: 4787656438-E3V1)**

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -4.5 dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

Note: GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance. For average power data please refer to section 8.6.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Adapter	SAMSUNG	EP-TA60KBK	R73H58A0B72DK3	N/A
Wireless Charger	SAMSUNG	EP-YO760	N/A	A3LEPYO760


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	0.8m	N/A

TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests.
EUT was set in the Hidden menu mode to enable BT communications.

SETUP DIAGRAM FOR TESTS

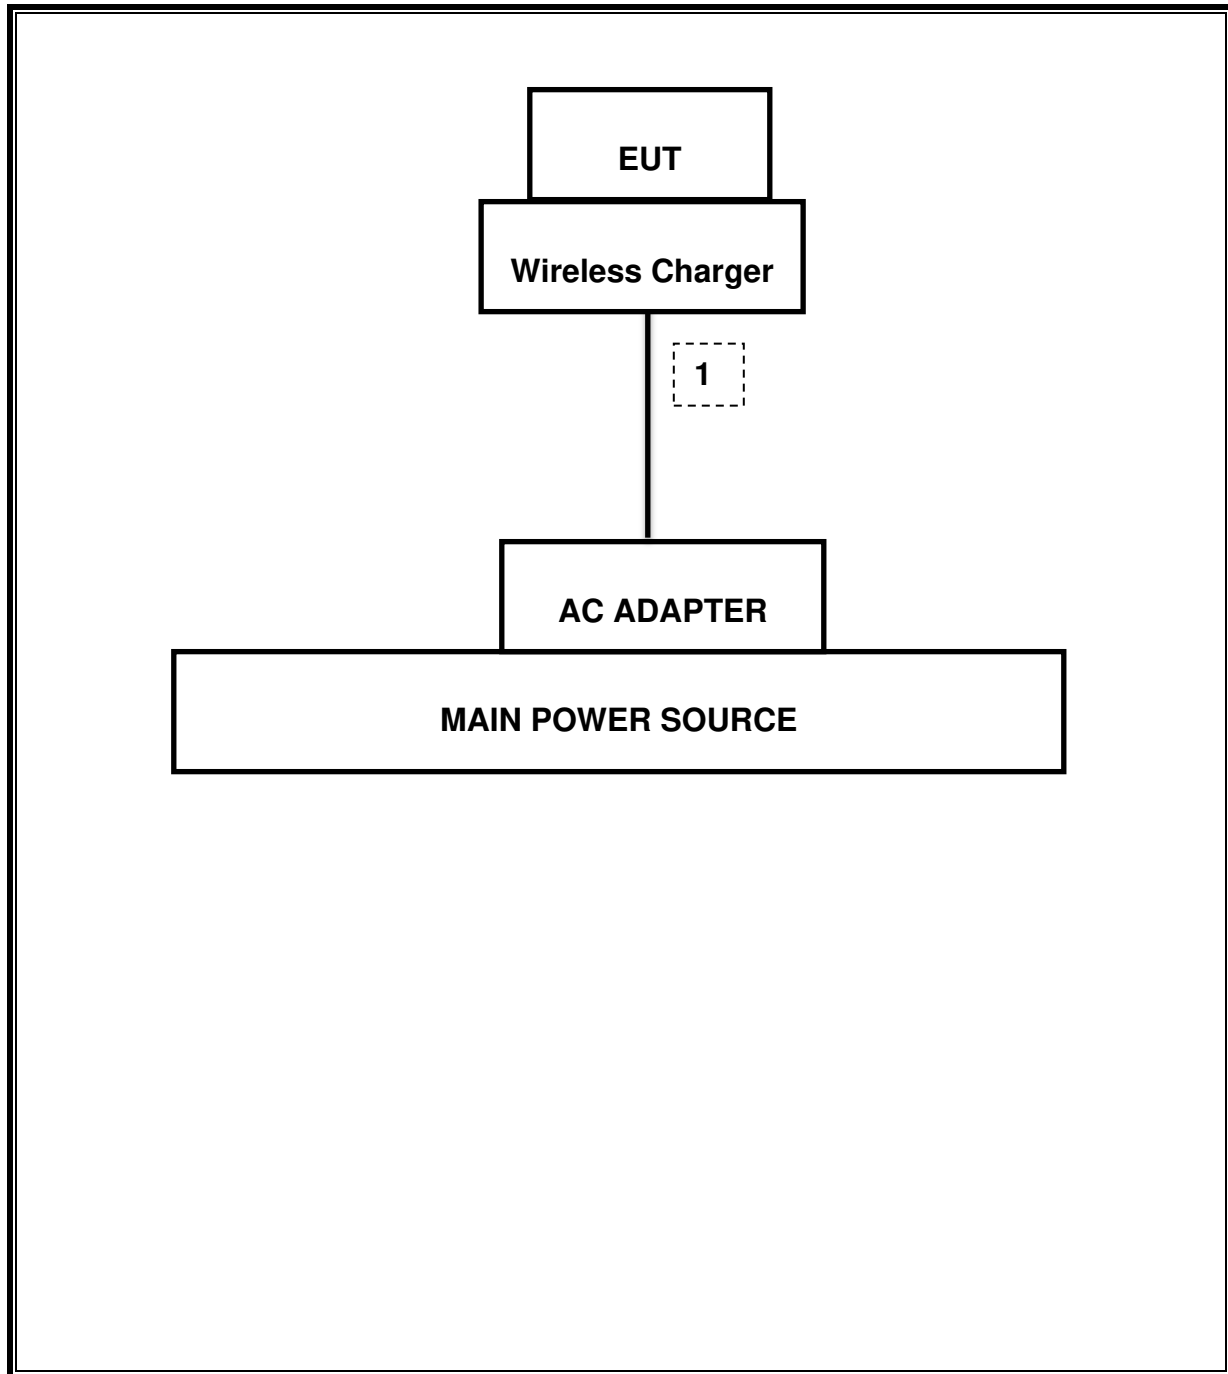

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	04-25-17
Antenna, Horn, 18 GHz	ETS	3115	00161451	05-17-17
Antenna, Horn, 18 GHz	ETS	3117	00168724	06-17-17
Antenna, Horn, 18 GHz	ETS	3117	00168717	06-17-17
Antenna, Horn, 40 GHz	ETS	3116C	00166155	11-30-17
Antenna, Horn, 40 GHz	ETS	3116C-PA	00168841	12-15-17
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-17-17
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-16-17
Preamplifier	ETS	3115-PA	00167475	08-17-17
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-16-17
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-17-17
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-16-17
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	08-18-17
Average Power Sensor	R&S	NRZ-Z91	102681	08-16-17
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-17-17
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-17-17
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-16-17
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-16-17
Attenuator / Switch driver	HP	11713A	3748A04272	N/A
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	08-17-17
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	08-16-17
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	08-17-17
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	08-16-17
High Pass Filter 6GHz	Micro-Tronics	HPM17542	009	08-17-17
High Pass Filter 6GHz	Micro-Tronics	HPM17542	016	08-16-17
LISN	R&S	ENV-216	101836	08-16-17
LISN	R&S	ENV-216	101837	08-16-17
Attenuator	PASTERNAK	PE7087-10	A009	08-16-17
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	11-25-17

7. SUMMARY TABLE

C2PC Reason: Please see A3LSMR775S C2PC description for details.

: The changes of this C2PC model are minor circuitry for non-transmitter portions.

So we tested only radiated items.

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1049	Occupied Band width (99%)	N/A	Conducted	Pass	See original
2.1051, 15.247 (d)	Band Edge / Conducted Spurious Emission	-20dBc		Pass	See original
15.247 (b)(1)	TX conducted output power	<21dBm		Pass	See original
15.247 (a)(1)	Hopping frequency separation	> 25KHz		Pass	See original
15.247 (a)(1)(iii)	Number of Hopping channels	More than 15 non-overlapping channels		Pass	See original
15.247 (a)(1)(iii)	Avg Time of Occupancy	< 0.4sec		Pass	See original
15.207 (a)	AC Power Line conducted emissions	Section 10	Power Line conducted	Pass	42.76 dBuV (Pk)
15.205, 15.209	Radiated Spurious Emission	< 54dBuV/m	Radiated	Pass	40.13 dBuV/m (Av)

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (μV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements.(Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.)

For band edge measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1/T (on time) for average measurement.

$$\text{GFSK} = 1/T = 1 / 0.0029\text{S} = 350\text{Hz}.$$

The minimum VBW was 350Hz, but test receiver(ESU40) couldn't set value 350Hz. Due to this reason, testing VBW was set to 500Hz(Worst cases).

The spectrum from 1GHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.
(From 30MHz to 1GHz, test was performed with the EUT set to transmit at the channel with highest output power)

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note : Emission was pre-scanned from 9KHz to 30MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).
Per FCC part 15.31(o), test results were not reported.


Formula for converting the filed strength from uV/m to dBuV/m is:
Limit (dBuV/m) = 20 log limit (uV/m)

8.2. TRANSMITTER ABOVE 1 GHz

8.2.1. BASIC DATA RATE GFSK MODULATION

RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

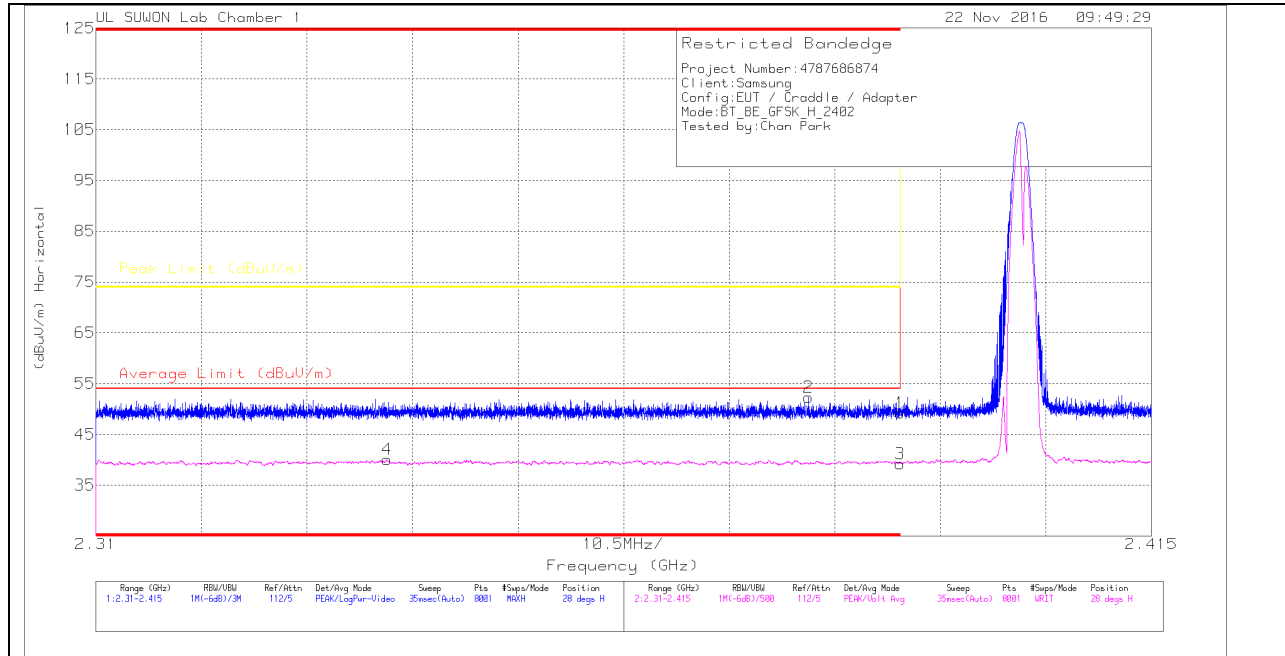

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	10dB[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	45.84	Pk	31.8	-28.4	49.24	-	-	74	-24.76	28	144	H
2	* 2.381	48.97	Pk	31.8	-28.5	52.27	-	-	74	-21.73	28	144	H
3	* 2.39	35.85	VA1T	31.8	-28.4	39.25	54	-14.75	-	-	28	144	H
4	* 2.339	36.81	VA1T	31.7	-28.5	40.01	54	-13.99	-	-	28	144	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average $V_B = 1/T_{on}$ where: T_{on} is transmit duration

VERTICAL PEAK AND AVERAGE PLOT

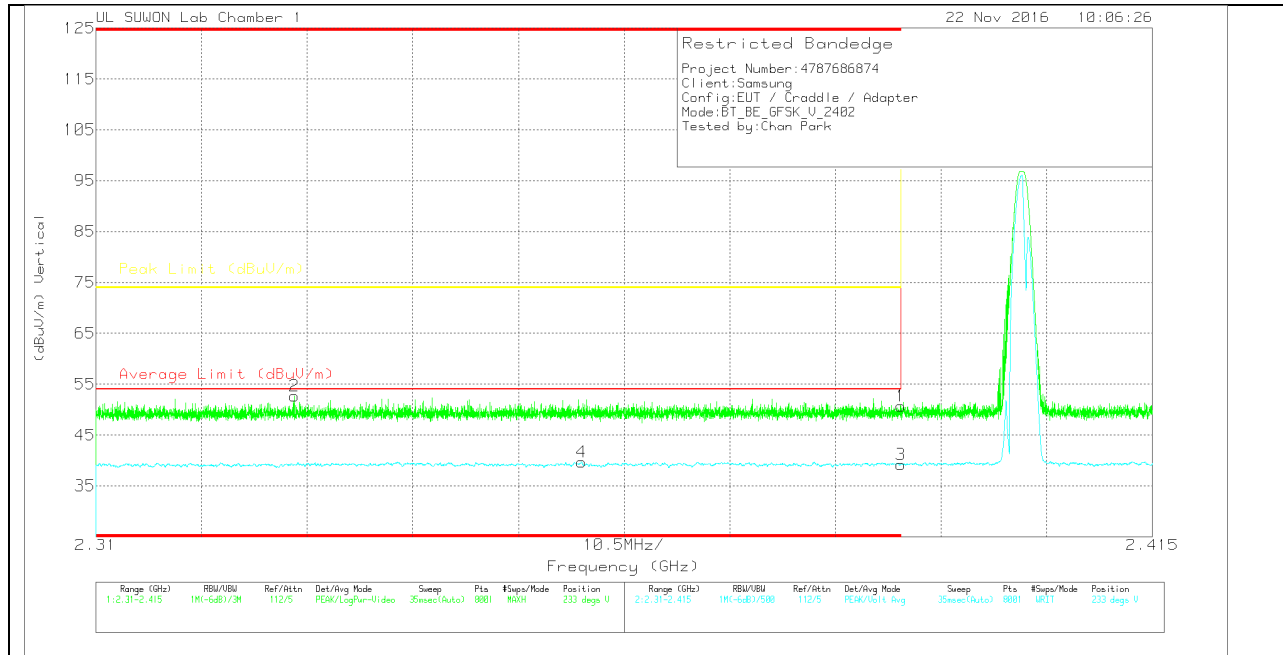

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	10dB[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	47.33	Pk	31.8	-28.4	50.73	-	-	74	-23.27	233	127	V
2	* 2.33	49.5	Pk	31.7	-28.5	52.7	-	-	74	-21.3	233	127	V
3	* 2.39	35.84	VA1T	31.8	-28.4	39.24	54	-14.76	-	-	233	127	V
4	* 2.358	36.41	VA1T	31.7	-28.4	39.71	54	-14.29	-	-	233	127	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average $VB=1/Ton$ where: Ton is transmit duration

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

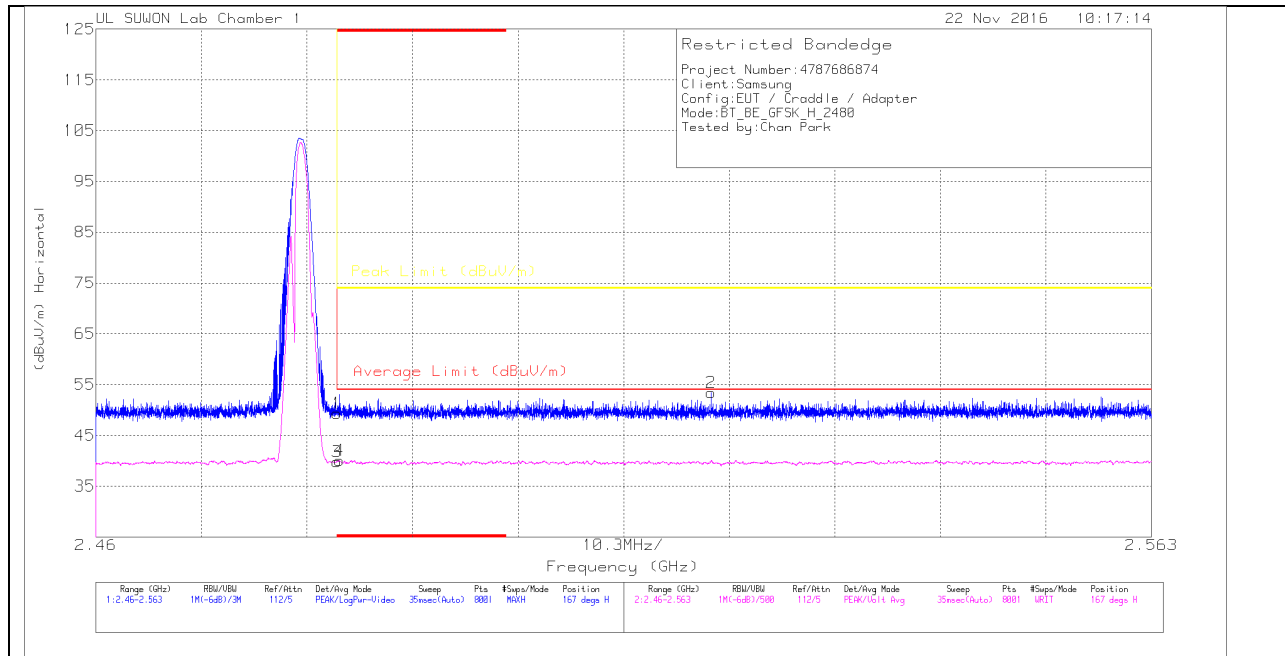

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	10dB[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	45.6	Pk	32	-28.3	49.3	-	-	74	-24.7	167	133	H
2	2.52	49.7	Pk	32	-28.3	53.4	-	-	74	-20.6	167	133	H
3	* 2.484	36.16	VA1T	32	-28.3	39.86	54	-14.14	-	-	167	133	H
4	* 2.484	36.38	VA1T	32	-28.3	40.08	54	-13.92	-	-	167	133	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average $V_B=1/T_{on}$ where: T_{on} is transmit duration

VERTICAL PEAK AND AVERAGE PLOT

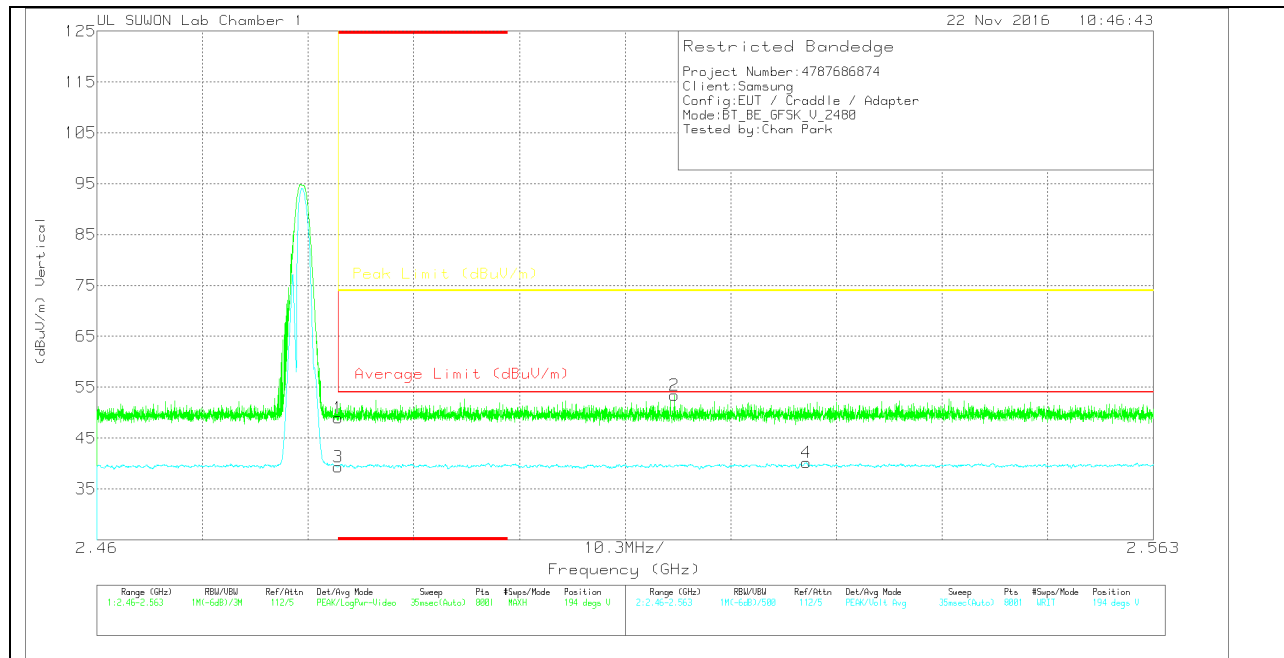

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	10dB[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	45.21	Pk	32	-28.3	48.91	-	-	74	-25.09	194	106	V
2	2.516	49.76	Pk	32	-28.3	53.46	-	-	74	-20.54	194	106	V
3	* 2.484	35.58	VA1T	32	-28.3	39.28	54	-14.72	-	-	194	106	V
4	2.529	36.43	VA1T	32	-28.3	40.13	54	-13.87	-	-	194	106	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector


VA1T - FHSS: Linear Voltage Average $VB=1/Ton$ where: Ton is transmit duration

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

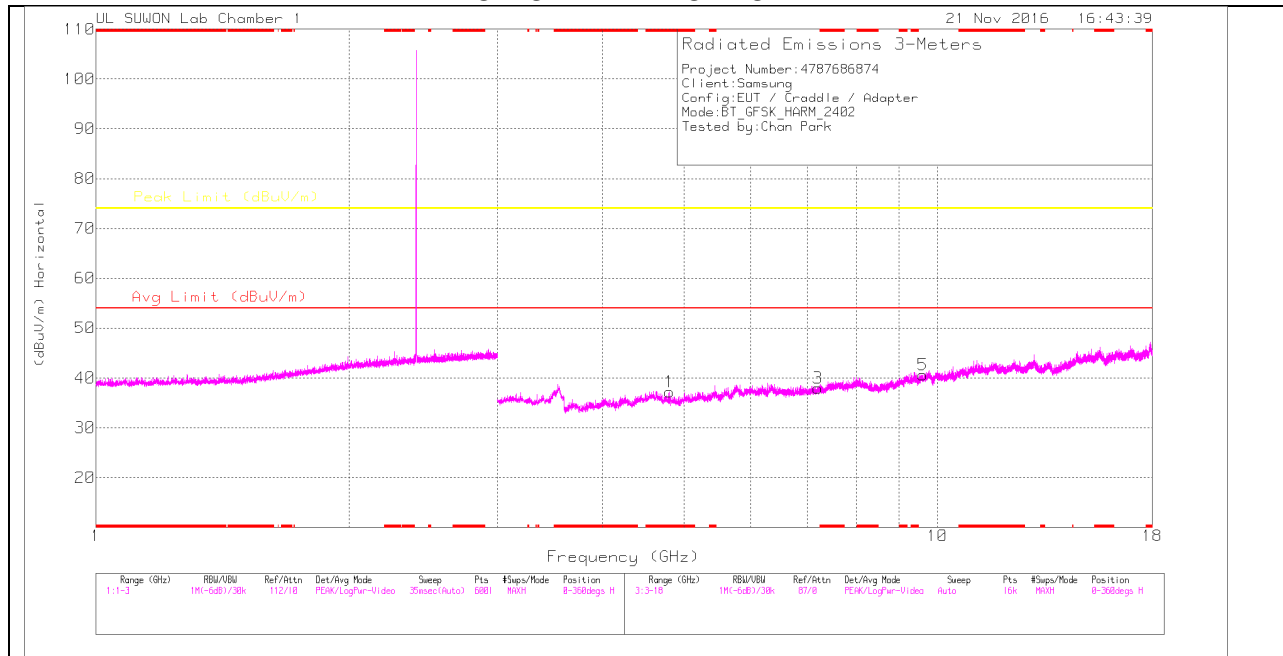

LOW CHANNEL VERTICAL

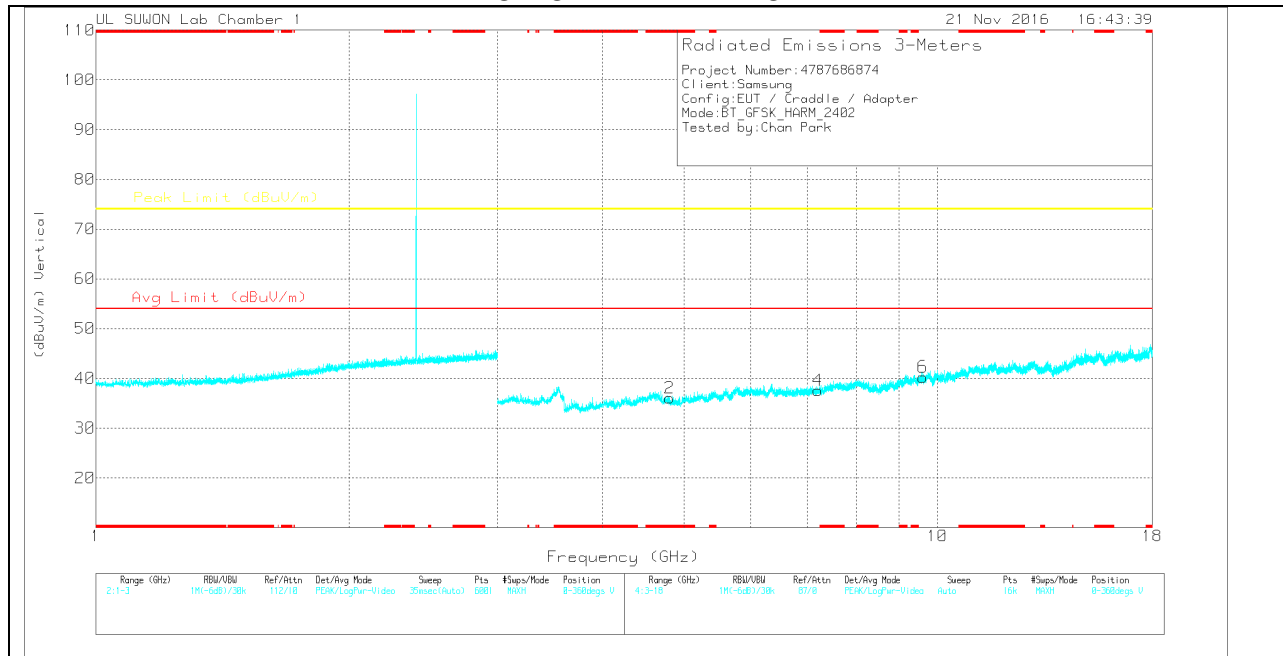

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	3GHz_HP[d B]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.804	36.71	PK	34	-33.5	37.21	-	-	74	-36.79	0-360	250	H
3	7.208	32.96	PK	35.7	-30.7	37.96	-	-	74	-36.04	0-360	250	H
5	9.608	31	PK	37	-27.4	40.6	-	-	74	-33.4	0-360	250	H
2	* 4.804	35.59	PK	34	-33.5	36.09	-	-	74	-37.91	0-360	250	V
4	7.212	32.63	PK	35.7	-30.7	37.63	-	-	74	-36.37	0-360	250	V
6	9.612	30.7	PK	37	-27.4	40.3	-	-	74	-33.7	0-360	250	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

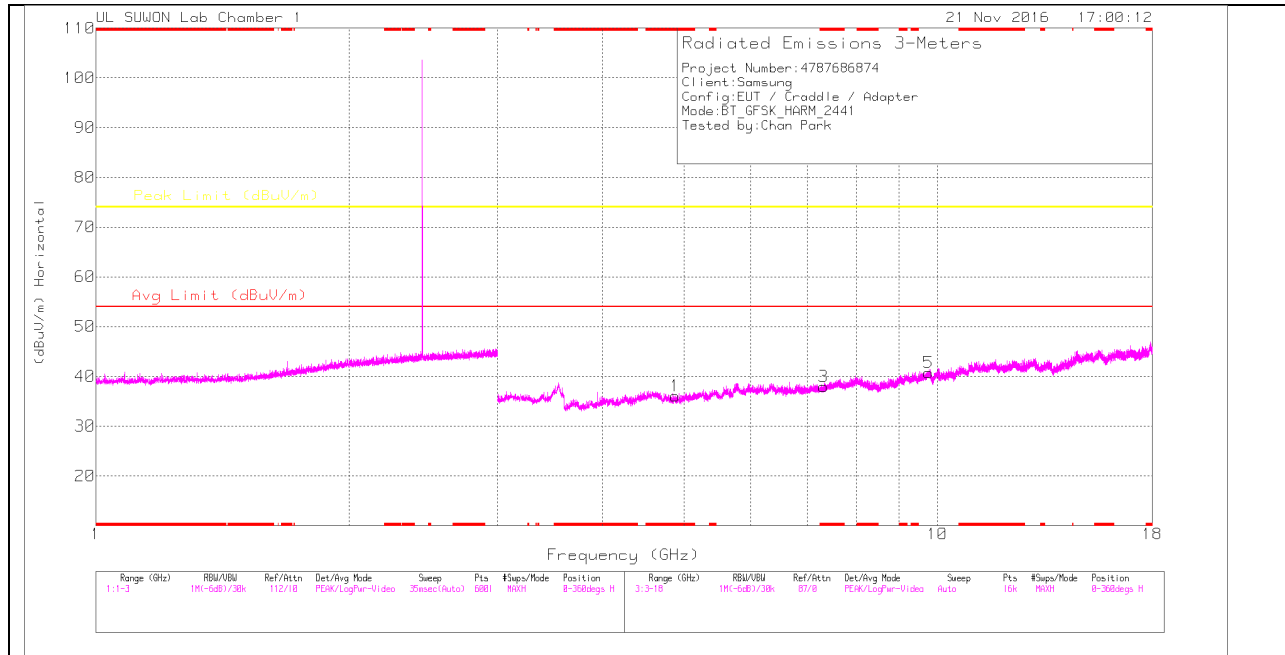

MID CHANNEL VERTICAL

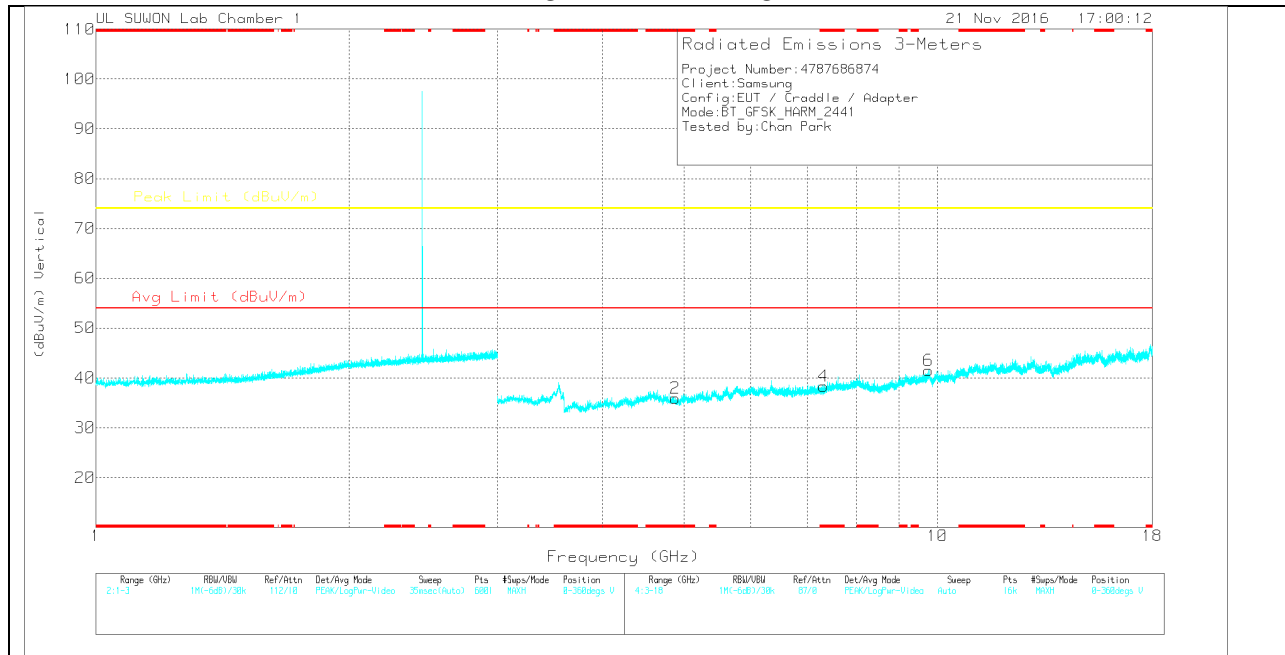

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	3GHz_HP[d B]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.881	35.53	PK	34	-33.5	36.03	-	-	74	-37.97	0-360	150	H
3	* 7.325	32.81	PK	35.8	-30.6	38.01	-	-	74	-35.99	0-360	250	H
5	9.764	30.1	PK	37.2	-26.6	40.7	-	-	74	-33.3	0-360	250	H
2	* 4.878	35.46	PK	34	-33.5	35.96	-	-	74	-38.04	0-360	250	V
4	* 7.324	33.09	PK	35.8	-30.6	38.29	-	-	74	-35.71	0-360	250	V
6	9.765	30.92	PK	37.2	-26.6	41.52	-	-	74	-32.48	0-360	250	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

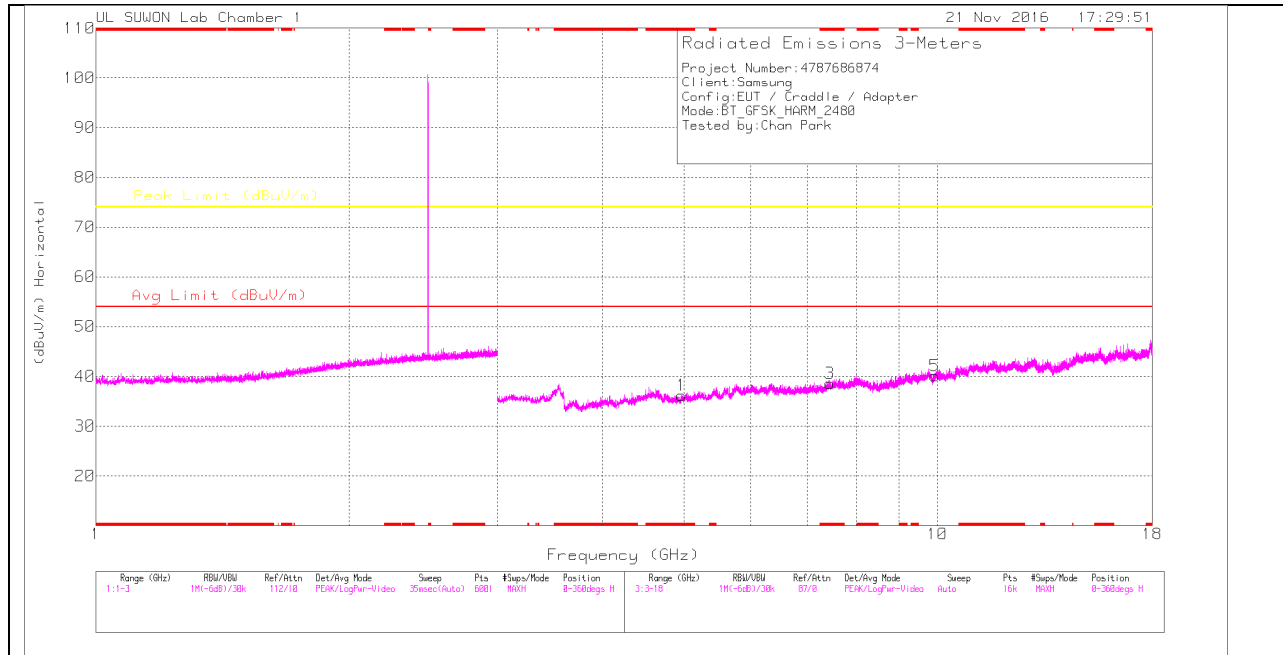

HIGH CHANNEL VERTICAL

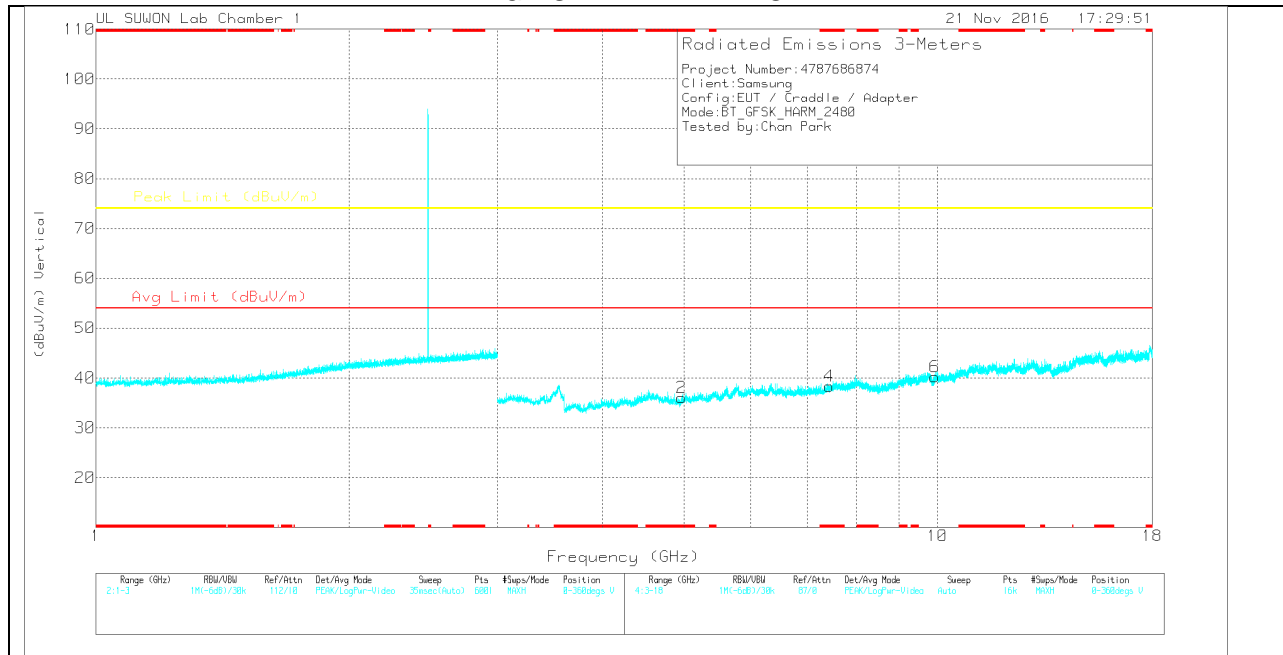

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	3GHz_HP[d B]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.961	35.76	PK	34	-33.6	36.16	-	-	74	-37.84	0-360	250	H
3	* 7.443	33.21	PK	35.8	-30.4	38.61	-	-	74	-35.39	0-360	150	H
5	9.919	29.83	PK	37.4	-27.1	40.13	-	-	74	-33.87	0-360	150	H
2	* 4.965	35.54	PK	34.1	-33.6	36.04	-	-	74	-37.96	0-360	250	V
4	* 7.442	32.96	PK	35.8	-30.4	38.36	-	-	74	-35.64	0-360	250	V
6	9.92	29.89	PK	37.4	-27.1	40.19	-	-	74	-33.81	0-360	250	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

8.2.2. ENHANCED DATA RATE 8PSK MODULATION RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

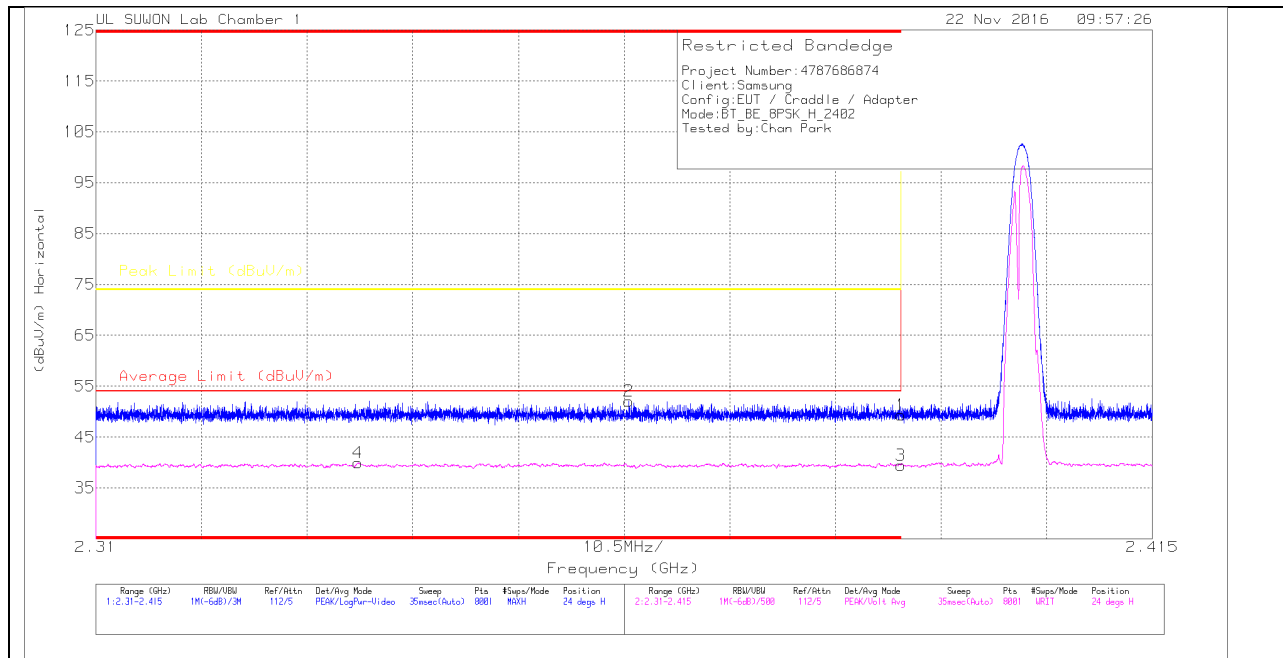

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	10dB[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	45.91	Pk	31.8	-28.4	49.31	-	-	74	-24.69	24	144	H
2	* 2.363	48.61	Pk	31.8	-28.4	52.01	-	-	74	-21.99	24	144	H
3	* 2.39	36.08	VA1T	31.8	-28.4	39.48	54	-14.52	-	-	24	144	H
4	* 2.336	36.79	VA1T	31.7	-28.5	39.99	54	-14.01	-	-	24	144	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

VERTICAL PEAK AND AVERAGE PLOT

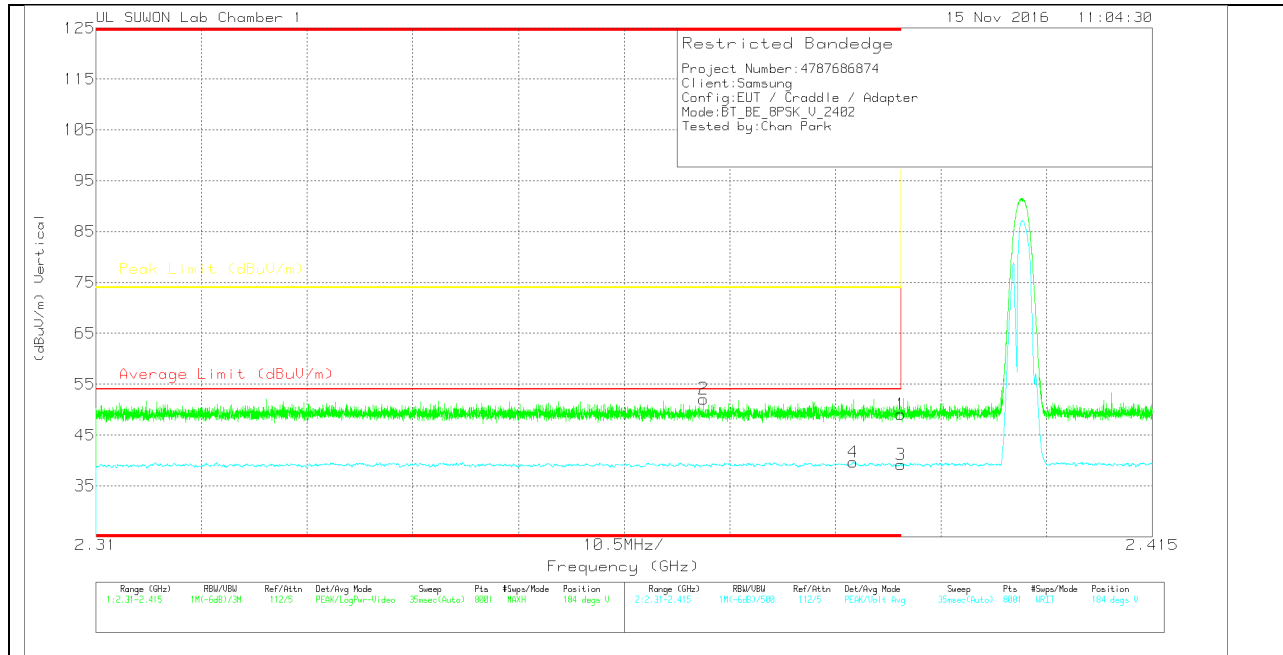

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	10dB[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	45.73	Pk		-28.4	49.13	-	-	74	-24.87	184	101	V
2	* 2.37	48.82	Pk		-28.5	52.12	-	-	74	-21.88	184	101	V
3	* 2.39	35.75	VA1T		-28.4	39.15	54	-14.85	-	-	184	101	V
4	* 2.385	36.4	VA1T		-28.5	39.7	54	-14.3	-	-	184	101	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average $VB=1/Ton$ where: Ton is transmit duration

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

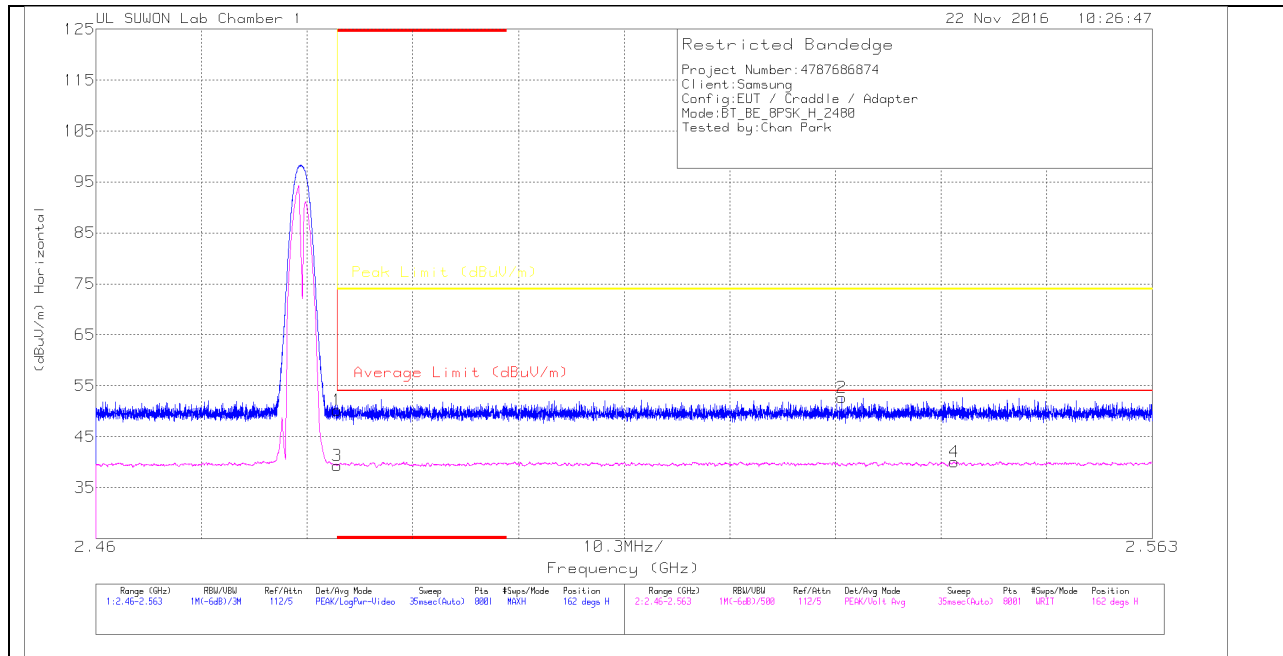

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	10dB[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	46.45	Pk	32	-28.3	50.15	-	-	74	-23.85	162	134	H
2	2.533	49.02	Pk	32	-28.3	52.72	-	-	74	-21.28	162	134	H
3	* 2.484	35.6	VA1T	32	-28.3	39.3	54	-14.7	-	-	162	134	H
4	2.544	36.38	VA1T	32	-28.3	40.08	54	-13.92	-	-	162	134	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

VERTICAL PEAK AND AVERAGE PLOT

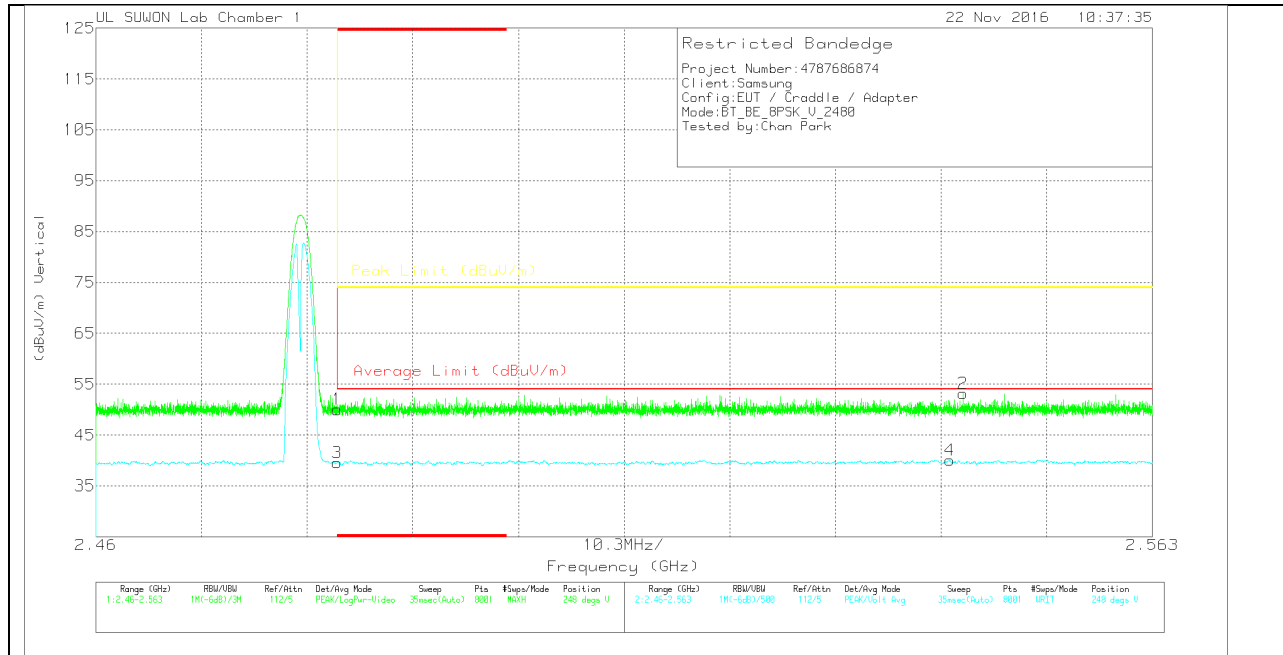

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	10dB[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	46.32	Pk	32	-28.3	50.02	-	-	74	-23.98	248	199	V
2	2.545	49.44	Pk	32	-28.3	53.14	-	-	74	-20.86	248	199	V
3	* 2.484	35.85	VA1T	32	-28.3	39.55	54	-14.45	-	-	248	199	V
4	2.543	36.38	VA1T	32	-28.3	40.08	54	-13.92	-	-	248	199	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector


VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

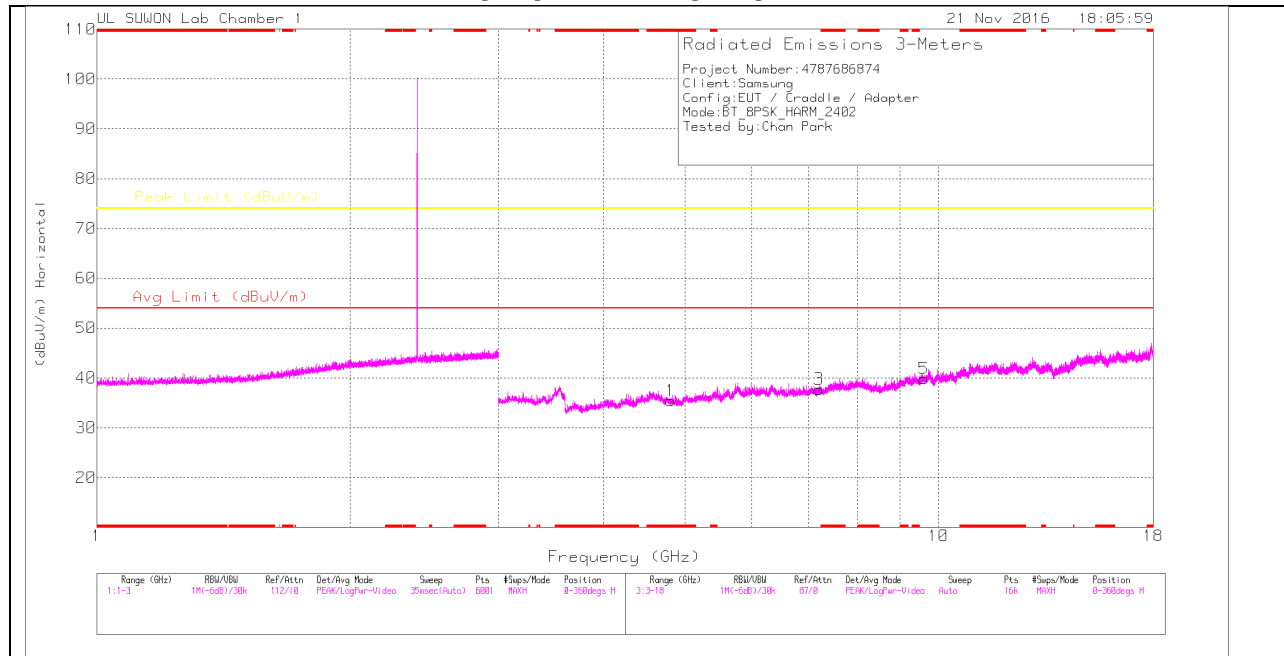

LOW CHANNEL VERTICAL

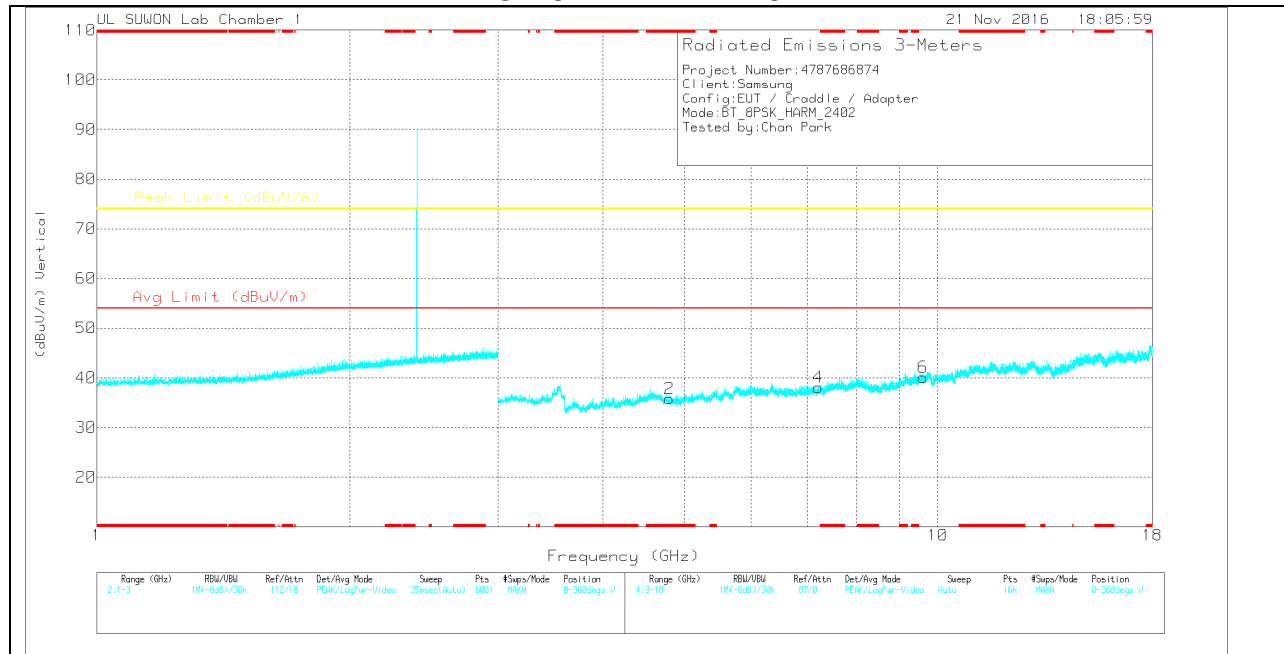

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	3GHz_HP[d B]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.806	34.93	PK	34	-33.5	35.43	-	-	74	-38.57	0-360	250	H
3	7.207	32.67	PK	35.7	-30.6	37.77	-	-	74	-36.23	0-360	250	H
5	9.607	30.31	PK	37	-27.4	39.91	-	-	74	-34.09	0-360	150	H
2	* 4.8	35.23	PK	34	-33.4	35.83	-	-	74	-38.17	0-360	250	V
4	7.208	33.05	PK	35.7	-30.7	38.05	-	-	74	-35.95	0-360	150	V
6	9.606	30.55	PK	37	-27.4	40.15	-	-	74	-33.85	0-360	150	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

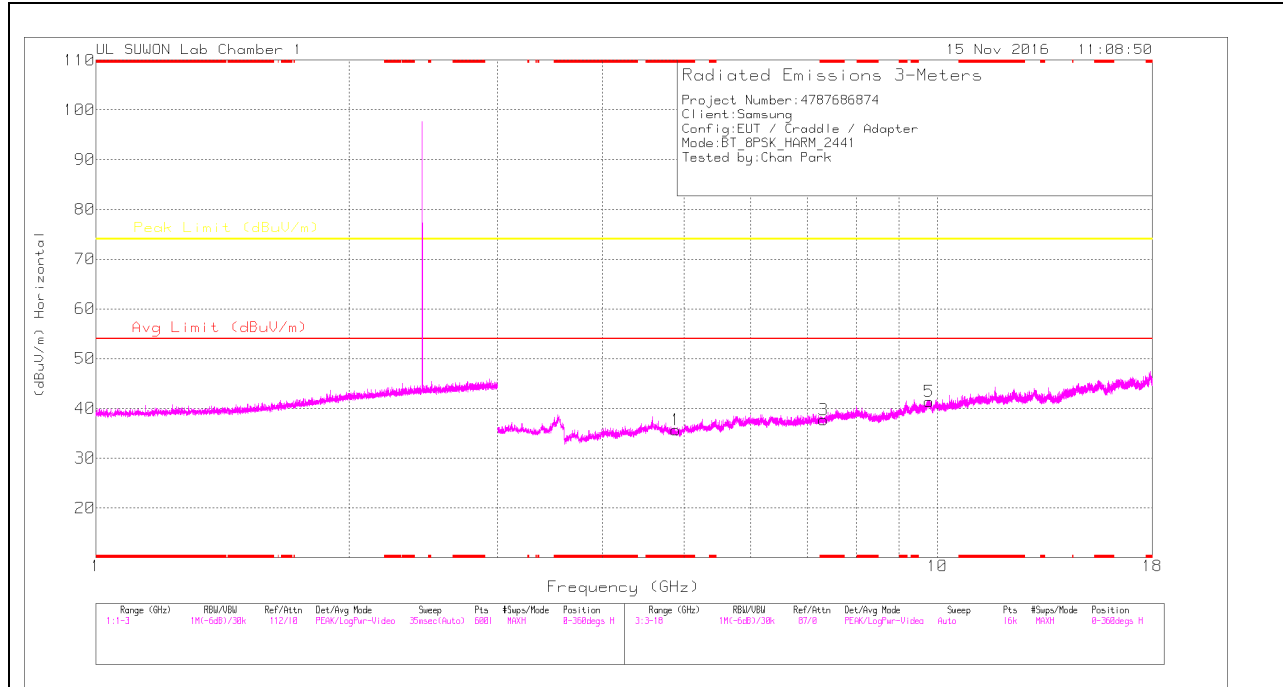

MID CHANNEL VERTICAL

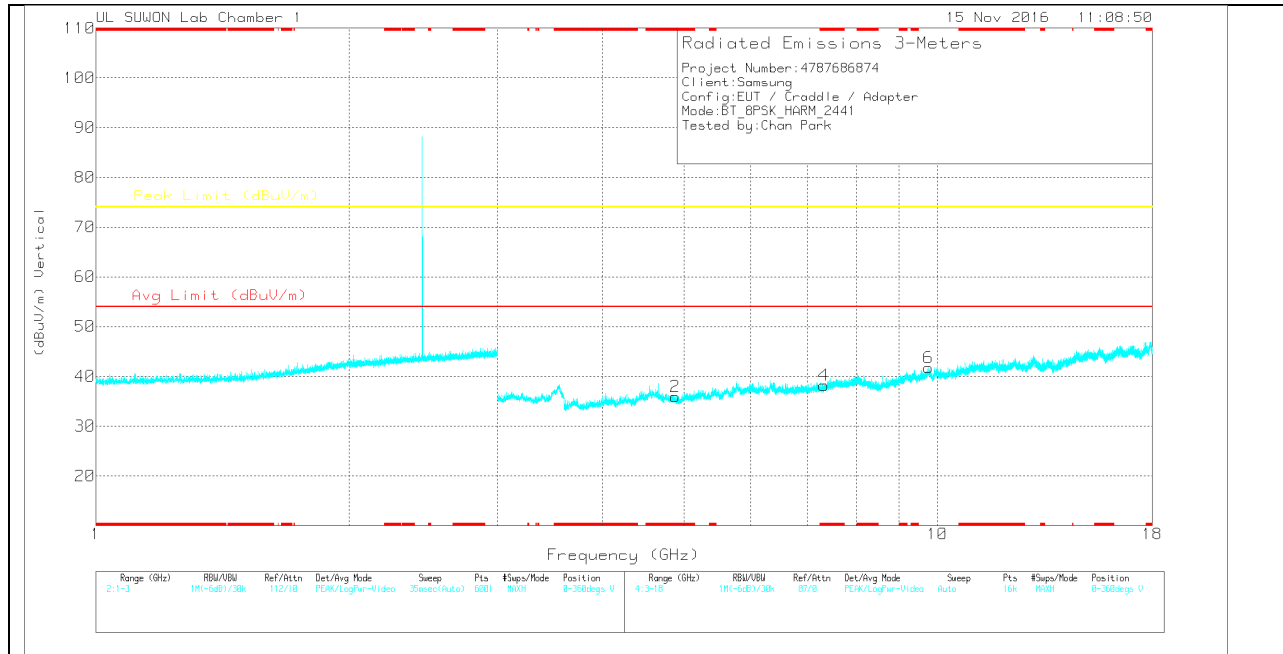

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	3GHz_HP[d B]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.884	35.22	PK	34	-33.5	35.72	-	-	74	-38.28	0-360	250	H
3	* 7.324	32.55	PK	35.8	-30.6	37.75	-	-	74	-36.25	0-360	150	H
5	9.766	30.62	PK	37.2	-26.5	41.32	-	-	74	-32.68	0-360	250	H
2	* 4.88	35.47	PK	34	-33.5	35.97	-	-	74	-38.03	0-360	250	V
4	* 7.328	32.99	PK	35.8	-30.6	38.19	-	-	74	-35.81	0-360	150	V
6	9.765	31.13	PK	37.2	-26.6	41.73	-	-	74	-32.27	0-360	250	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

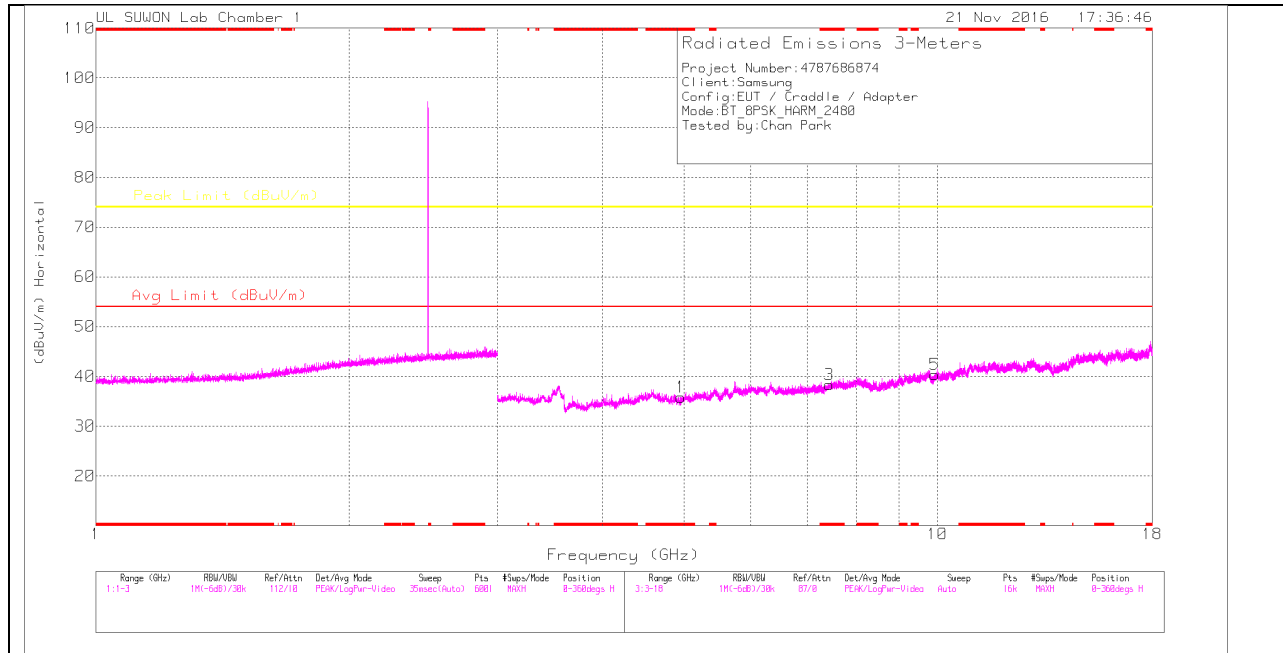

HIGH CHANNEL VERTICAL

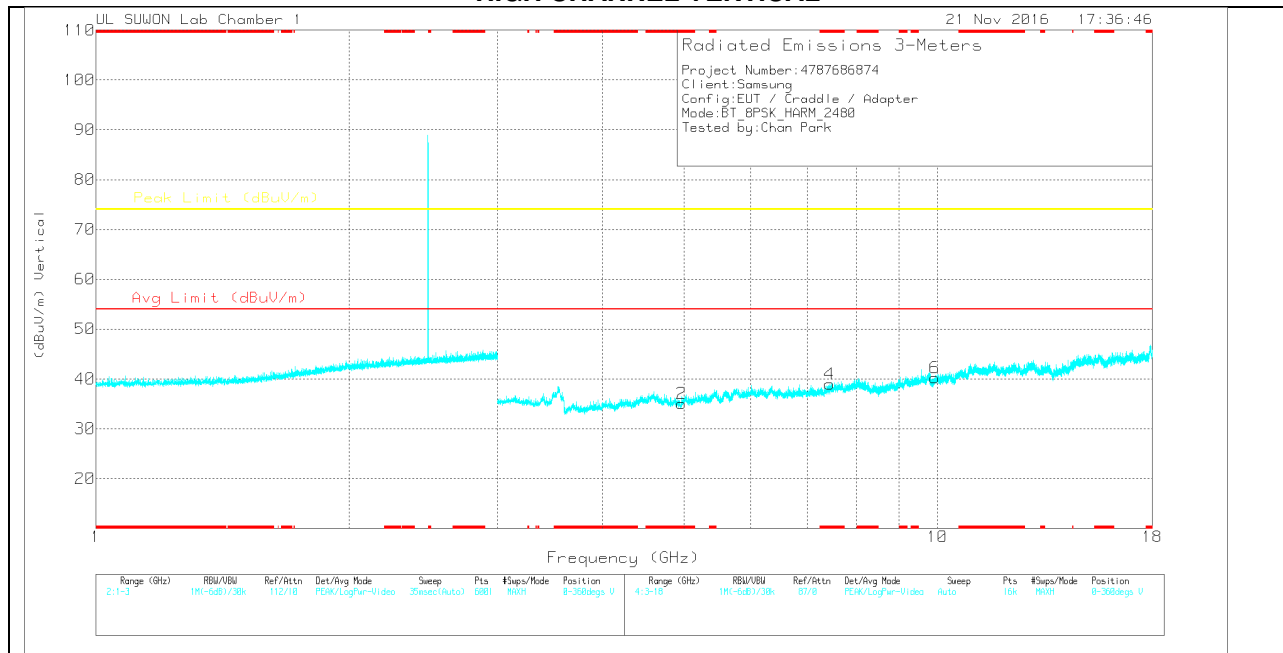

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8717)_150 619	3GHz_HP[d B]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.957	35.39	PK	34	-33.6	35.79	-	-	74	-38.21	0-360	150	H
3	* 7.441	32.91	PK	35.8	-30.4	38.31	-	-	74	-35.69	0-360	250	H
5	9.92	30.06	PK	37.4	-27.1	40.36	-	-	74	-33.64	0-360	250	H
2	* 4.961	34.66	PK	34	-33.6	35.06	-	-	74	-38.94	0-360	250	V
4	* 7.443	33.54	PK	35.8	-30.4	38.94	-	-	74	-35.06	0-360	150	V
6	9.922	29.95	PK	37.4	-27.1	40.25	-	-	74	-33.75	0-360	150	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).


8.3. WORST-CASE BELOW 1 GHz

GFSK SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL PLOT

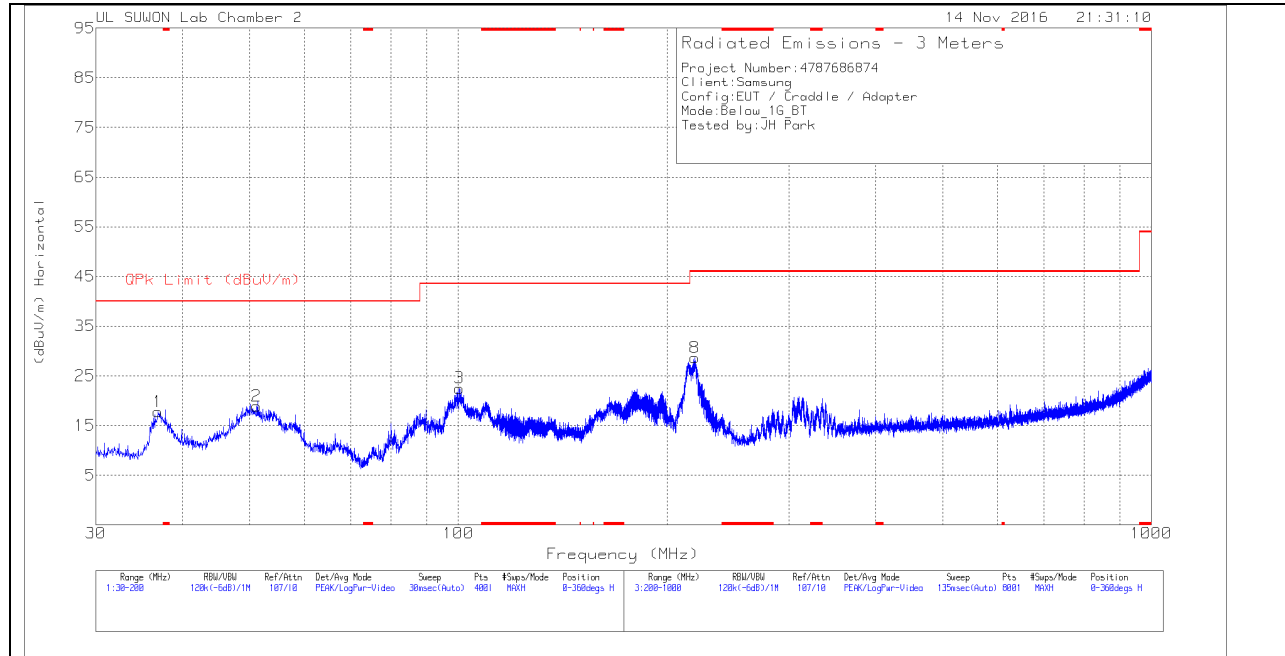

VERTICAL PLOT

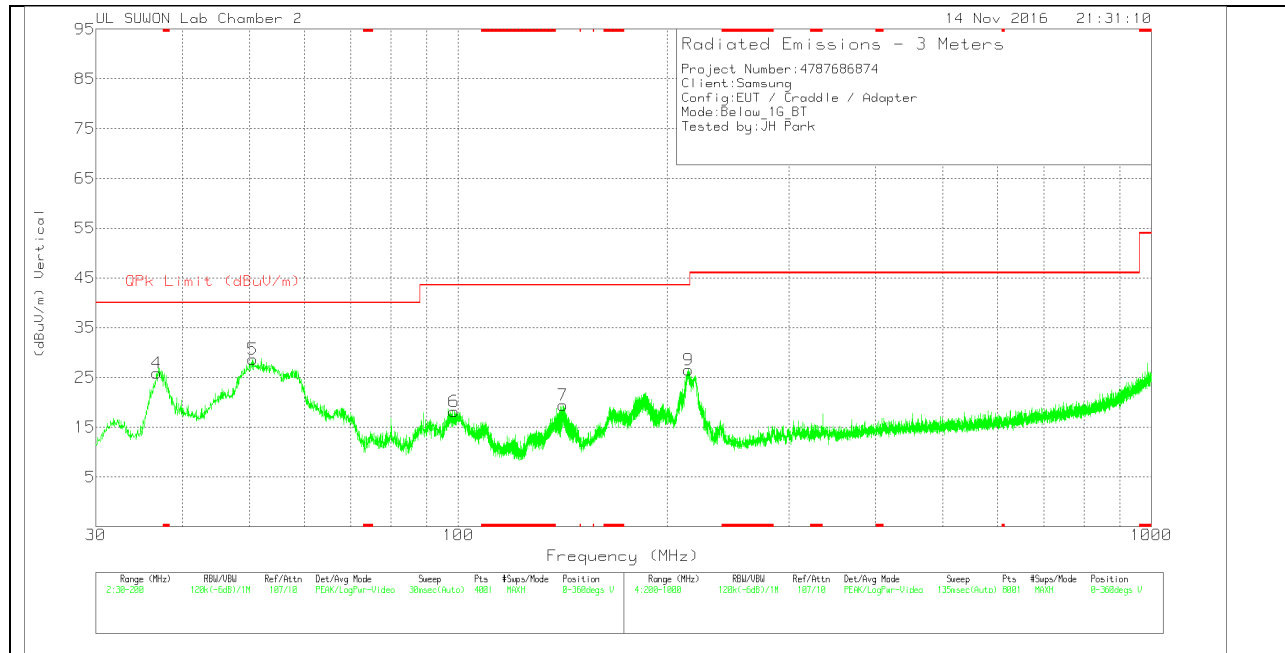

BELOW 1 GHz TABLE

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VUL89163-749	30-1000MHz[dB]	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	36.885	37.93	Pk	11.5	-31.6	17.83	40	-22.17	0-360	200	H
2	51.165	36.3	Pk	14	-31.4	18.9	40	-21.1	0-360	400	H
3	100.295	41.92	Pk	11.6	-31	22.52	43.52	-21	0-360	300	H
4	36.715	46.01	Pk	11.5	-31.6	25.91	40	-14.09	0-360	100	V
5	50.485	46.04	Pk	14	-31.4	28.64	40	-11.36	0-360	100	V
6	98.595	37.96	Pk	11.3	-31.1	18.16	43.52	-25.36	0-360	200	V
7	141.5625	42.22	Pk	8	-30.8	19.42	43.52	-24.1	0-360	100	V
8	219.3	47.22	Pk	11.8	-30.4	28.62	46.02	-17.4	0-360	100	H
9	215	45.34	Pk	11.7	-30.5	26.54	43.52	-16.98	0-360	200	V

Pk - Peak detector

9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS

LINE 1 PLOT

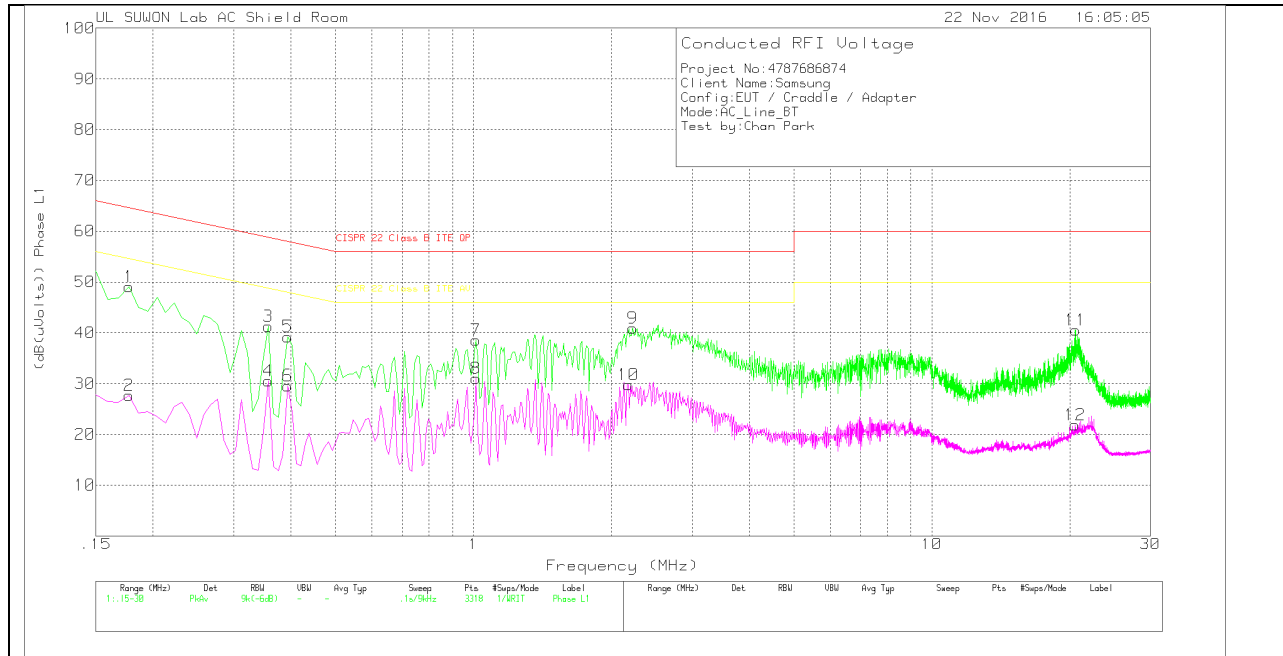

LINE 1 RESULTS

Trace Markers


Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101837_w ith ex- cord_L1	CE Shield Room	Corrected Reading (dB(uVolts)	CISPR 22 Class B ITE QP	Margin (dB)	CISPR 22 Class B ITE AV	Margin (dB)
1	.177	39.13	Pk	10	0	49.13	64.63	-15.5	-	-
2	.177	17.7	Av	10	0	27.7	-	-	54.63	-26.93
3	.357	31.5	Pk	9.8	0	41.3	58.8	-17.5	-	-
4	.357	20.77	Av	9.8	0	30.57	-	-	48.8	-18.23
5	.393	29.34	Pk	9.9	0	39.24	58	-18.76	-	-
6	.393	19.69	Av	9.9	0	29.59	-	-	48	-18.41
7	1.014	28.78	Pk	9.8	0	38.58	56	-17.42	-	-
8	1.014	21.26	Av	9.8	0	31.06	-	-	46	-14.94
9	2.229	31.08	Pk	9.7	.1	40.88	56	-15.12	-	-
10	2.175	20	Av	9.7	.1	29.8	-	-	46	-16.2
11	20.607	29.96	Pk	10.4	.2	40.56	60	-19.44	-	-
12	20.571	11.28	Av	10.4	.2	21.88	-	-	50	-28.12

Pk - Peak detector

Av - Average detection

LINE 2 PLOT

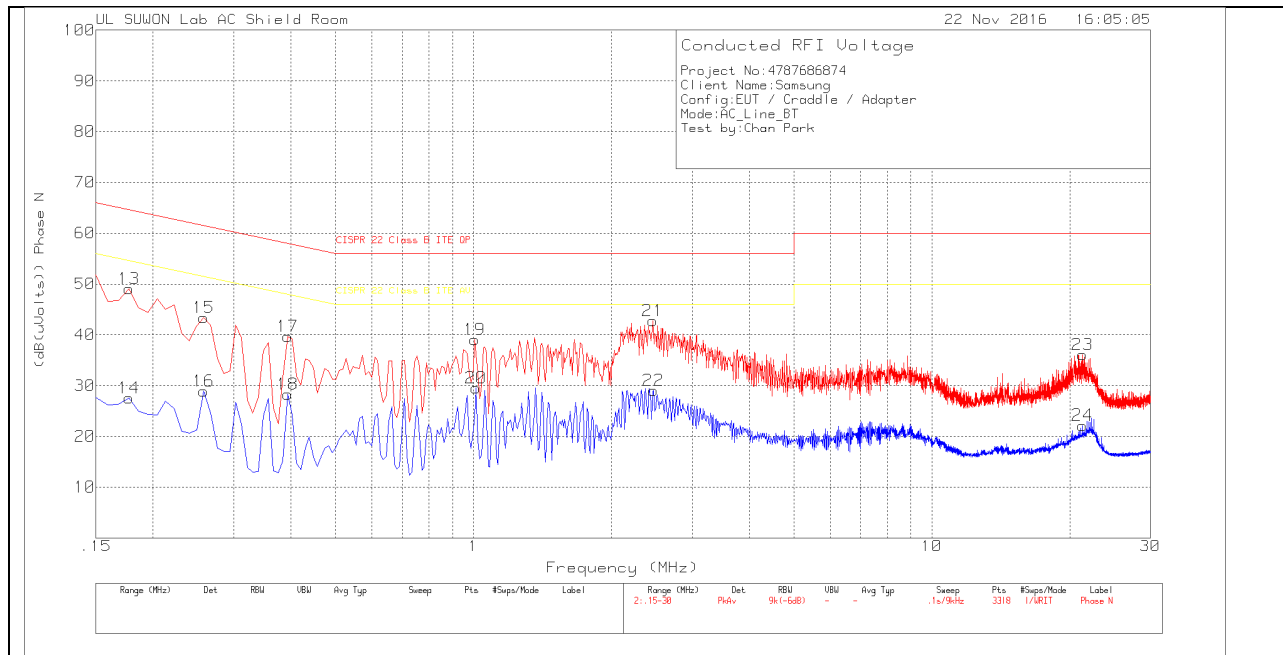

LINE 2 RESULTS

Trace Markers

Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101837_w ith ex- cord_N	CE Shield Room	Corrected Reading (dB(uVolts)	CISPR 22 Class B ITE QP	Margin (dB)	CISPR 22 Class B ITE AV	Margin (dB)
13	.177	39.05	Pk	10	0	49.05	64.63	-15.58	-	-
14	.177	17.6	Av	10	0	27.6	-	-	54.63	-27.03
15	.258	33.66	Pk	9.7	0	43.36	61.5	-18.14	-	-
16	.258	19.18	Av	9.7	0	28.88	-	-	51.5	-22.62
17	.393	29.79	Pk	9.9	0	39.69	58	-18.31	-	-
18	.393	18.43	Av	9.9	0	28.33	-	-	48	-19.67
19	1.005	29.28	Pk	9.8	0	39.08	56	-16.92	-	-
20	1.014	19.78	Av	9.8	0	29.58	-	-	46	-16.42
21	2.463	32.96	Pk	9.7	.1	42.76	56	-13.24	-	-
22	2.472	19.24	Av	9.7	.1	29.04	-	-	46	-16.96
23	21.354	25.15	Pk	10.7	.2	36.05	60	-23.95	-	-
24	21.354	11.27	Av	10.7	.2	22.17	-	-	50	-27.83

Pk - Peak detector

Av - Average detection