

# TEST REPORT

FCC/IC LTE Test for SM-R825U

Certification

**APPLICANT**

SAMSUNG Electronics Co., Ltd.

**REPORT NO.**

HCT-RF-1907-FI027

**DATE OF ISSUE**

July 29, 2019

**HCT Co., Ltd.**

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 634 6300 F ax. +82 31 645 6401



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 634 6300 Fax. +82 31 645 6401

**TEST  
REPORT**  
FCC/IC LTE Test for  
SM-R825U

REPORT NO.  
HCT-RF-1907-FI027

DATE OF ISSUE  
July 29, 2019

FCC ID/ IC  
A3LSMR825/649E-SMR825

Applicant **SAMSUNG Electronics Co., Ltd.**  
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Eut Type Smart Watch  
Model Name SM-R825U  
Additional Model(s) SM-R825F

Date of Receipt June 13, 2019

FCC Rule Part(s) § 27, § 2

IC Rule(s) RSS-Gen Issue5, RSS-130 Issue2

FCC Classification PCS Licensed Transmitter (PCB)

Manufacturer SAMSUNG Electronics Co., Ltd.

Tested by  
Kwon Jeong

(signature)

Technical Manager  
Jong Seok Lee

(signature)

HCT CO., LTD.

*Soo Chan Lee*  
SooChan Lee / CEO

## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	July 29, 2019	Initial Release

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

## CONTENTS

1. GENERAL INFORMATION	5
1.1. MAXIMUM OUTPUT POWER	6
2. INTRODUCTION	7
2.1. DESCRIPTION OF EUT	7
2.2. MEASURING INSTRUMENT CALIBRATION	7
2.3. TEST FACILITY	7
3. DESCRIPTION OF TESTS	8
3.1 TEST PROCEDURE	8
3.2 RADIATED POWER	9
3.3 RADIATED SPURIOUS EMISSIONS	10
3.4 OCCUPIED BANDWIDTH.	11
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	12
3.6 BAND EDGE	13
3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	14
3.8 WORST CASE(RADIATED TEST)	15
3.9 WORST CASE(CONDUCTED TEST)	16
4. LIST OF TEST EQUIPMENT	17
5. MEASUREMENT UNCERTAINTY	18
6. SUMMARY OF TEST RESULTS	19
7. SAMPLE CALCULATION	20
8. TEST DATA	22
8.1 EFFECTIVE RADIATED POWER	22
8.3 RADIATED SPURIOUS EMISSIONS	24
8.3 OCCUPIED BANDWIDTH	28
8.4 CONDUCTED SPURIOUS EMISSIONS	29
8.5 BAND EDGE	29
8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	30
8.7 RECEIVER SPURIOUS EMISSIONS	42
9. TEST PLOTS	43
10. ANNEX A_ TEST SETUP PHOTO	90
11. ANNEX B_ EMI TEST RESULT	91

## MEASUREMENT REPORT

### 1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMR825
IC	649E-SMR825
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule Part(s):	§ 27, § 2
IC Rule(s):	RSS-Gen Issue5, RSS-130 Issue2
EUT Type:	Smart Watch
Model(s):	SM-R825U
Additional Model	SM-R825F
Tx Frequency:	699.7 MHz – 715.3 MHz (LTE – Band 12 (1.4 MHz)) 700.5 MHz – 714.5 MHz (LTE – Band 12 (3 MHz)) 701.5 MHz – 713.5 MHz (LTE – Band 12(5 MHz)) 704.0 MHz – 711.0 MHz (LTE – Band 12(10 MHz))
Date(s) of Tests:	June 13, 2019~ July 26, 2019

**1.1. MAXIMUM OUTPUT POWER**

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band12 (1.4)	699.7 – 715.3	1M10G7D	QPSK	0.008	9.20
		1M10W7D	16QAM	0.005	6.82
LTE – Band12 (3)	700.5 – 714.5	2M72G7D	QPSK	0.008	9.03
		2M71W7D	16QAM	0.005	6.75
LTE – Band12 (5)	701.5 – 713.5	4M52G7D	QPSK	0.008	8.96
		4M51W7D	16QAM	0.005	6.57
LTE – Band12 (10)	704.0 – 711.0	8M97G7D	QPSK	0.007	8.65
		8M97W7D	16QAM	0.004	6.24

## **2. INTRODUCTION**

### **2.1. DESCRIPTION OF EUT**

The EUT was a Smart Watch with UMTS and LTE.  
It also supports IEEE 802.11 b/g/n (HT20), Bluetooth, BT LE.

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12



## 3.2 RADIATED POWER

### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference

between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### 3.3 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.


#### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq$  3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points > 2 x span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data

### 3.4 OCCUPIED BANDWIDTH.

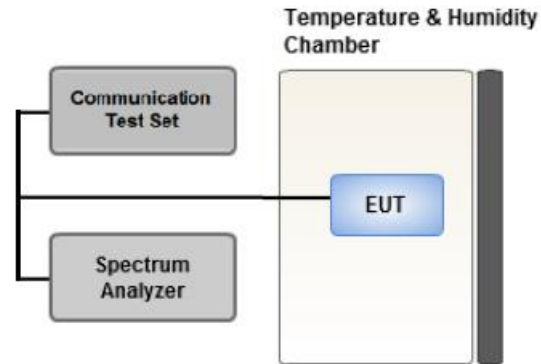

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### 3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

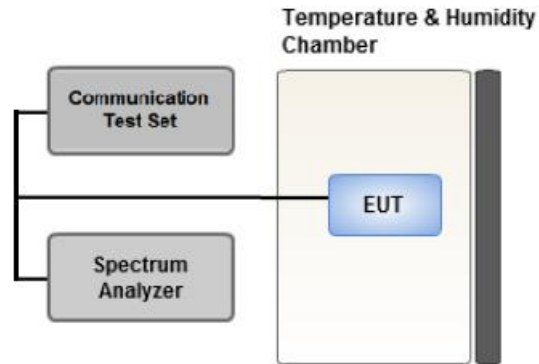

Test setup


#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 \* Span / RBW

### 3.6 BAND EDGE

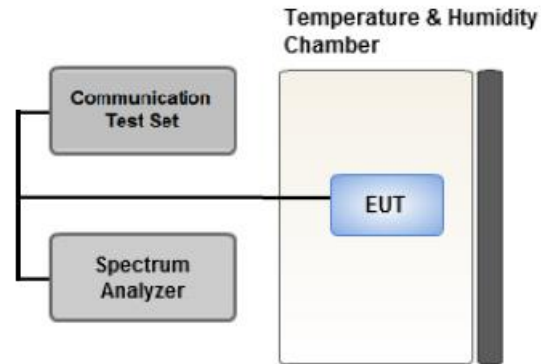

Test setup

#### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


#### Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

### 3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

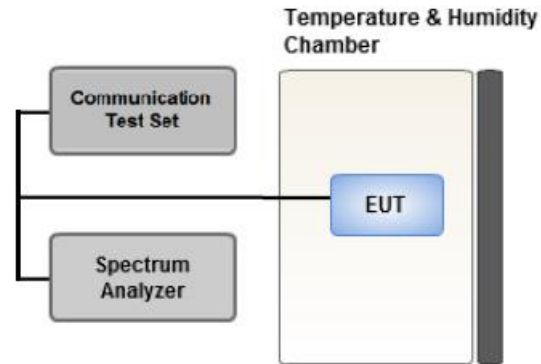

Test setup

#### Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

.- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.

.- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

#### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### 3.8 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- SM-R825U & additional model were tested and the worst case results are reported.  
(Worst case : SM-R825U)
- All modes of operation were tested and the worst case results are reported.  
Mode : Stand alone, Stand alone+ wireless charging dock  
Worst case : Stand alone+ wireless charging dock

[ Worst case ]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	QPSK, 16QAM	1	0	X
Radiated Spurious and Harmonic Emissions	QPSK	1	0	X

### 3.9 WORST CASE(CONDUCTED TEST)

- Worst case : Of all modulation, We have tested modulation of the high Conducted Output Power.

Conducted Output Power value can be confirmed on the SAR report.

- SM-R825U & additional model were tested and the worst case results are reported.

(Worst case : SM-R825U)

[ Worst case ]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM	1.4, 3, 5, 10	Mid	Full RB	0
Band Edge	* QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
1.4, 3, 5, 10	Low, High	Full RB	0		
	Low, Mid, High	1	0		
Spurious and Harmonic Emissions at Antenna Terminal	* QPSK	1.4, 3, 5, 10	Low, Mid, High	1	0



#### 4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibration Interval	Calibration Due
REOHDE & SCHWARZ	SCU 18 / AMPLIFIER	10094	04/16/2019	Annual	04/16/2020
Wainwright	WHK1.2/15G-10EF/H.P.F	4	04/02/2019	Annual	04/02/2020
Wainwright	WHK3.3/18G-10EF/H.P.F	2	04/02/2019	Annual	04/02/2020
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	11275	05/03/2019	Annual	05/03/2020
Agilent	E3632A/DC Power Supply	MY50360067	10/17/2018	Annual	10/17/2019
Schwarzbeck	UHAP/ Dipole Antenna	557	03/29/2019	Biennial	03/29/2021
Schwarzbeck	UHAP/ Dipole Antenna	558	03/29/2019	Biennial	03/29/2021
ESPEC	SU-642 / Chamber	93000718	08/07/2018	Annual	08/07/2019
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	09/14/2018	Annual	09/14/2019
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	10/04/2018	Annual	10/04/2019
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/29/2019	Biennial	04/29/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	01/28/2019	Biennial	01/28/2021
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY51110063	05/08/2019	Annual	05/08/2020
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/04/2019	Annual	06/04/2020
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/22/2018	Annual	10/22/2019
Agilent	8960 (E5515C)/ Base Station	MY48360800	09/27/2018	Annual	09/27/2019
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	08/23/2018	Biennial	08/23/2020
Schwarzbeck	VULB9160/ Bilog Antenna	9160-3368	08/09/2018	Biennial	08/09/2020
Schwarzbeck	VULB9160/ Hybrid Antenna	760	03/22/2019	Biennial	03/22/2021
Anritsu Corp.	MT8821C/Wideband Radio Communication Tester	6201502997	08/13/2018	Annual	08/13/2019
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	01/30/2019	Annual	01/30/2020
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	114415	10/01/2018	Annual	10/01/2019
REOHDE & SCHWARZ	ESU40 / EMI TEST RECEIVER	100524	07/27/2018	Annual	07/27/2019
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

**Note:**

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	IC Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	RSS Gen(6.7)	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 27.53(g)	RSS 130(4.7)	$< 43 + 10\log_{10} (P[\text{Watts}])$ at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§ 2.1046	-	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§ 2.1055, § 27.54	RSS 130(4.5)	Emission must remain in band	PASS

Note:

1. See SAR Report
2. The same samples were used for SAR and EMC

### 6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	IC Section(s)	Test Limit	Test Result
Effective Radiated Power	§ 27.50(c)(10)	RSS 130(4.6)	$< 3$ Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 27.53(g)	RSS 130(4.7)	$< 43 + 10\log_{10} (P[\text{Watts}])$ for all out-of band emissions	PASS
Receiver Spurious Emissions	N/A	RSS Gen(7)	Section 8.7	PASS

## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

### 7.3. Emission Designator

#### GSM Emission Designator

Emission Designator = 249KGXW  
GSM BW = 249 kHz  
G = Phase Modulation  
X = Cases not otherwise covered  
W = Combination (Audio/Data)

#### EDGE Emission Designator

Emission Designator = 249KG7W  
GSM BW = 249 kHz  
G = Phase Modulation  
7 = Quantized/Digital Info  
W = Combination (Audio/Data)

#### WCDMA Emission Designator

Emission Designator = 4M17F9W  
WCDMA BW = 4.17 MHz  
F = Frequency Modulation  
9 = Composite Digital Info  
W = Combination (Audio/Data)

#### QPSK Modulation

Emission Designator = 4M48G7D  
LTE BW = 4.48 MHz  
G = Phase Modulation  
7 = Quantized/Digital Info  
D = Data transmission; telemetry; telecommand

#### 16QAM Modulation

Emission Designator = 4M48W7D  
LTE BW = 4.48 MHz  
W = Amplitude/Angle Modulated  
7 = Quantized/Digital Info  
D = Data transmission; telemetry; telecommand

#### 64QAM Modulation

Emission Designator = 4M48W7D  
LTE BW = 4.48 MHz  
W = Amplitude/Angle Modulated  
7 = Quantized/Digital Info  
D = Data transmission; telemetry; telecommand

## 8. TEST DATA

### 8.1 EFFECTIVE RADIATED POWER

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
699.7	LTE B12 (1.4 MHz)	QPSK	-38.81	18.54	-10.16	0.78	H	< 3.00	0.006	7.60
		16-QAM	-40.93	16.42	-10.16	0.78	H		0.004	5.48
707.5		QPSK	-37.85	19.44	-10.17	0.78	H		0.007	8.49
		16-QAM	-40.22	17.07	-10.17	0.78	H		0.004	6.12
715.3		QPSK	-37.05	20.16	-10.18	0.78	H		0.008	9.20
		16-QAM	-39.43	17.78	-10.18	0.78	H		0.005	6.82

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
700.5	LTE B12 (3 MHz)	QPSK	-38.40	18.97	-10.16	0.78	H	< 3.00	0.006	8.03
		16-QAM	-40.75	16.62	-10.16	0.78	H		0.004	5.68
707.5		QPSK	-37.76	19.53	-10.17	0.78	H		0.007	8.58
		16-QAM	-40.14	17.15	-10.17	0.78	H		0.004	6.20
714.5		QPSK	-37.20	19.99	-10.18	0.78	H		0.008	9.03
		16-QAM	-39.48	17.71	-10.18	0.78	H		0.005	6.75

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
701.5	LTE B12 (5 MHz)	QPSK	-38.01	19.39	-10.16	0.78	H	< 3.00	0.007	8.45
		16-QAM	-40.48	16.92	-10.16	0.78	H		0.004	5.98
707.5		QPSK	-37.73	19.56	-10.17	0.78	H		0.007	8.61
		16-QAM	-40.24	17.05	-10.17	0.78	H		0.004	6.10
713.5		QPSK	-37.26	19.92	-10.18	0.78	H		0.008	8.96
		16-QAM	-39.65	17.53	-10.18	0.78	H		0.005	6.57

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
704.0	LTE B12 (10 MHz)	QPSK	-37.92	19.48	-10.16	0.78	H	< 3.00	0.007	8.54
		16-QAM	-40.36	17.04	-10.16	0.78	H		0.004	6.10
707.5		QPSK	-37.73	19.56	-10.17	0.78	H		0.007	8.61
		16-QAM	-40.26	17.03	-10.17	0.78	H		0.004	6.08
711.0		QPSK	-37.61	19.61	-10.18	0.78	H		0.007	8.65
		16-QAM	-40.02	17.20	-10.18	0.78	H		0.004	6.24

### 8.3 RADIATED SPURIOUS EMISSIONS

- ▣ OPERATING FREQUENCY: 715.3 MHz
- ▣ MEASURED OUTPUT POWER: 9.20 dBm = 0.008 W
- ▣ MODE: LTE B12
- ▣ MODULATION SIGNAL: 1.4 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  22.20 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
23017 (699.7)	1,399.40	-43.54	5.32	-50.10	1.16	H	-48.09	57.29
	2,099.10	-54.08	7.68	-60.57	1.44	V	-56.48	65.68
	2,798.80	-52.15	9.00	-57.23	1.72	H	-52.10	61.30
23095 (707.5)	1,415.00	-50.47	5.41	-56.89	1.17	H	-54.80	63.99
	2,122.50	-51.61	7.58	-57.52	1.46	H	-53.55	62.74
	2,830.00	-57.78	9.08	-62.99	1.72	V	-57.78	66.97
23173 (715.3)	1,430.60	-50.95	5.55	-57.84	1.17	H	-55.61	64.81
	2,145.90	-52.50	7.32	-57.76	1.47	H	-54.06	63.26
	2,861.20	-58.49	9.16	-63.48	1.74	V	-58.21	67.41



- ▣ OPERATING FREQUENCY: 714.5 MHz
- ▣ MEASURED OUTPUT POWER: 9.03 dBm = 0.008 W
- ▣ MODE: LTE B12
- ▣ MODULATION SIGNAL: 3 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10} (W) =$  22.03 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
23025 (700.5)	1,401.00	-43.12	5.32	-49.68	1.16	H	-47.67	56.70
	2,101.50	-48.44	7.68	-54.93	1.44	H	-50.84	59.87
	2,802.00	-58.17	9.00	-63.25	1.72	V	-58.12	67.15
23095 (707.5)	1,415.00	-48.98	5.41	-55.40	1.17	H	-53.31	62.33
	2,122.50	-48.42	7.58	-54.33	1.46	H	-50.36	59.39
	2,830.00	-58.06	9.08	-63.27	1.72	V	-58.06	67.08
23165 (714.5)	1,429.00	-48.49	5.55	-55.38	1.17	H	-53.15	62.18
	2,143.50	-50.63	7.32	-55.89	1.47	H	-52.19	61.22
	2,858.00	-56.79	9.16	-61.78	1.74	V	-56.51	65.54

- ▣ OPERATING FREQUENCY: 713.5 MHz
- ▣ MEASURED OUTPUT POWER: 8.96 dBm = 0.008 W
- ▣ MODE: LTE B12
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10} (W) =$  21.96 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
23035 (701.5)	1,403.00	-45.27	5.32	-51.83	1.16	H	-49.82	58.78
	2,104.50	-45.02	7.66	-51.25	1.45	H	-47.19	56.15
	2,806.00	-57.55	9.01	-62.63	1.70	V	-57.47	66.43
23095 (707.5)	1,415.00	-49.96	5.41	-56.38	1.17	H	-54.29	63.24
	2,122.50	-51.29	7.58	-57.20	1.46	H	-53.23	62.19
	2,830.00	-57.68	9.08	-62.89	1.72	V	-57.68	66.64
23155 (713.5)	1,427.00	-46.62	5.55	-53.51	1.17	H	-51.28	60.24
	2,140.50	-48.84	7.37	-54.09	1.47	V	-50.34	59.30
	2,854.00	-57.67	9.16	-62.74	1.73	H	-57.46	66.42

- ▣ OPERATING FREQUENCY: 711.0 MHz
- ▣ MEASURED OUTPUT POWER: 8.65 dBm = 0.007 W
- ▣ MODE: LTE B12
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10} (W) =$  21.65 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
23060 (704.0)	1,408.00	-45.65	5.38	-51.98	1.17	H	-49.92	58.57
	2,112.00	-45.18	7.63	-51.15	1.45	H	-47.12	55.77
	2,816.00	-56.81	9.03	-62.01	1.70	H	-56.83	65.47
23095 (707.5)	1,415.00	-47.12	5.41	-53.54	1.17	H	-51.45	60.09
	2,122.50	-53.10	7.58	-59.01	1.46	V	-55.04	63.69
	2,830.00	-56.18	9.08	-61.39	1.72	H	-56.18	64.82
23130 (711.0)	1,422.00	-53.28	5.44	-59.78	1.17	H	-57.66	66.30
	2,133.00	-50.62	7.47	-56.37	1.47	V	-52.52	61.16
	2,844.00	-57.80	9.13	-62.94	1.71	V	-57.67	66.32

### 8.3 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( MHz )
12	1.4 MHz	707.5	QPSK	6	0	1.0980
			16-QAM			1.0945
	3 MHz		QPSK	15		2.7145
			16-QAM			2.7127
	5 MHz		QPSK	25		4.5174
			16-QAM			4.5138
	10 MHz		QPSK	50		8.9717
			16-QAM			8.9744

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 44 ~ 51.

### 8.4 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
12	1.4	699.7	1.3994	27.976	-64.966	-36.990	-13.00
		707.5	3.7169	27.976	-67.182	-39.206	
		715.3	1.4323	27.976	-66.560	-38.584	
	3	700.5	1.3989	27.976	-64.596	-36.620	
		707.5	3.6995	27.976	-67.060	-39.084	
		714.5	3.7319	27.976	-67.123	-39.147	
	5	701.5	1.3994	27.976	-65.318	-37.342	
		707.5	3.7044	27.976	-67.216	-39.240	
		713.5	3.6950	27.976	-67.282	-39.306	
	10	704.0	1.3999	27.976	-65.125	-37.149	
		707.5	3.6905	27.976	-66.899	-38.923	
		711.0	1.4313	27.976	-66.444	-38.468	

**Note:**

1. Plots of the EUT’s Conducted Spurious Emissions are shown Page 78 ~ 89.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131


### 8.5 BAND EDGE

- Plots of the EUT’s Band Edge are shown Page 52 ~ 77.

### 8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE B12
- ▣ OPERATING FREQUENCY: 699,700,000 Hz
- ▣ CHANNEL: 23017 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	699 700 002	0.0	0.000 000	0.000
100%		-30	699 700 005	2.2	0.000 000	0.003
100%		-20	699 700 005	2.9	0.000 000	0.004
100%		-10	699 700 005	2.6	0.000 000	0.004
100%		0	699 700 004	2.0	0.000 000	0.003
100%		+10	699 700 005	2.5	0.000 000	0.004
100%		+30	699 700 006	3.1	0.000 000	0.004
100%		+40	699 700 005	2.7	0.000 000	0.004
100%		+50	699 700 004	2.0	0.000 000	0.003
Batt. Endpoint		3.500	+20	699 700 004	1.8	0.000 000

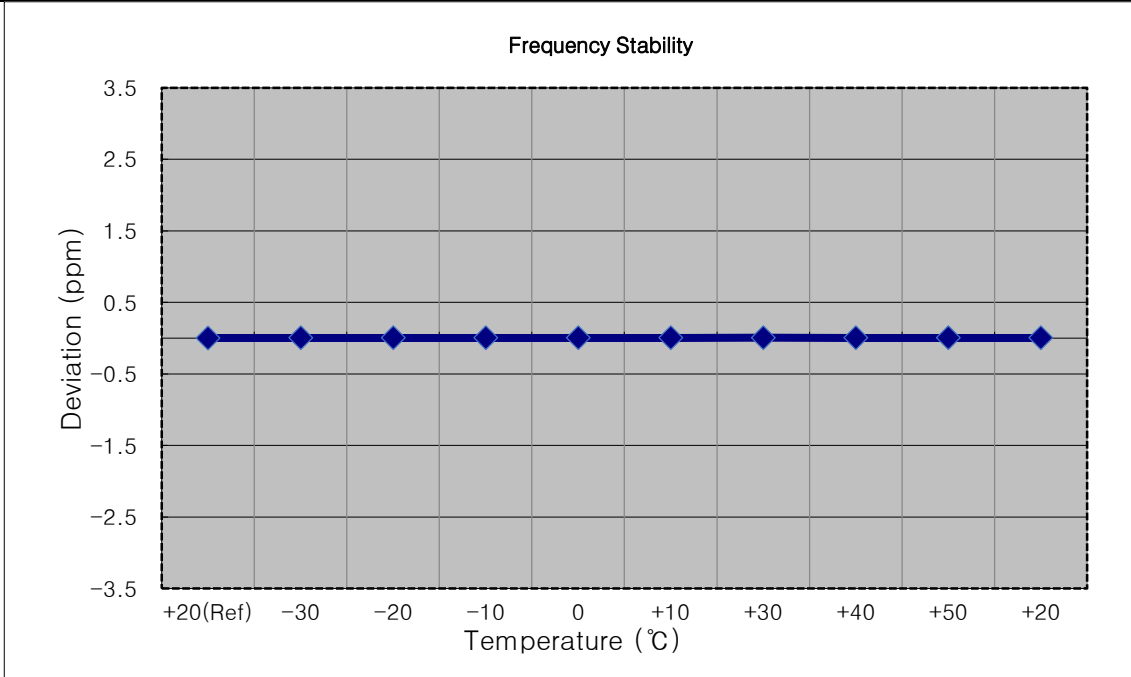


- ▣ MODE: LTE B12
- ▣ OPERATING FREQUENCY: 700,500,000 Hz
- ▣ CHANNEL: 23025 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	700 499 998	0.0	0.000 000	0.000
100%		-30	700 500 001	3.0	0.000 000	0.004
100%		-20	700 499 995	-3.0	0.000 000	-0.004
100%		-10	700 499 995	-3.1	0.000 000	-0.004
100%		0	700 499 993	-4.3	-0.000 001	-0.006
100%		+10	700 499 994	-3.5	0.000 000	-0.005
100%		+30	700 499 993	-4.9	-0.000 001	-0.007
100%		+40	700 499 994	-3.3	0.000 000	-0.005
100%		+50	700 499 993	-4.6	-0.000 001	-0.007
Batt. Endpoint	3.500	+20	700 499 995	-2.3	0.000 000	-0.003

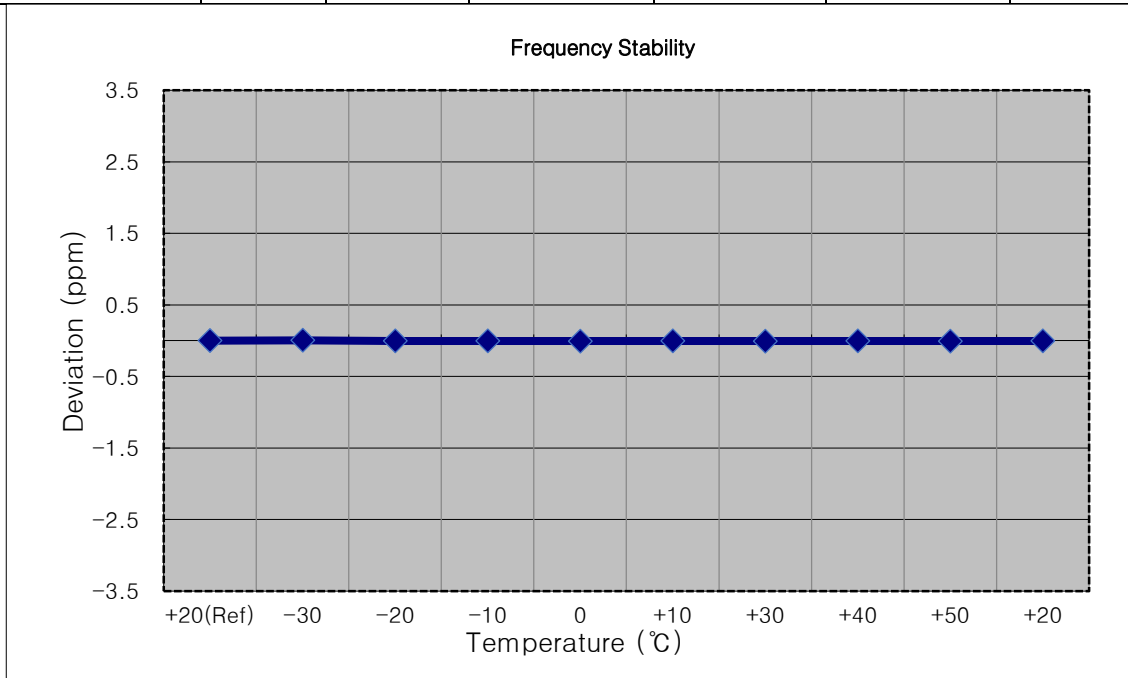

- ▣ MODE: LTE B12
- ▣ OPERATING FREQUENCY: 701,500,000 Hz
- ▣ CHANNEL: 23035 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	701 499 997	0.0	0.000 000	0.000
100%		-30	701 499 995	-2.3	0.000 000	-0.003
100%		-20	701 499 994	-3.1	0.000 000	-0.004
100%		-10	701 500 001	4.2	0.000 001	0.006
100%		0	701 500 000	3.6	0.000 001	0.005
100%		+10	701 500 000	3.3	0.000 000	0.005
100%		+30	701 500 000	2.9	0.000 000	0.004
100%		+40	701 500 000	3.5	0.000 000	0.005
100%		+50	701 500 000	2.8	0.000 000	0.004
Batt. Endpoint	3.500	+20	701 499 999	2.6	0.000 000	0.004

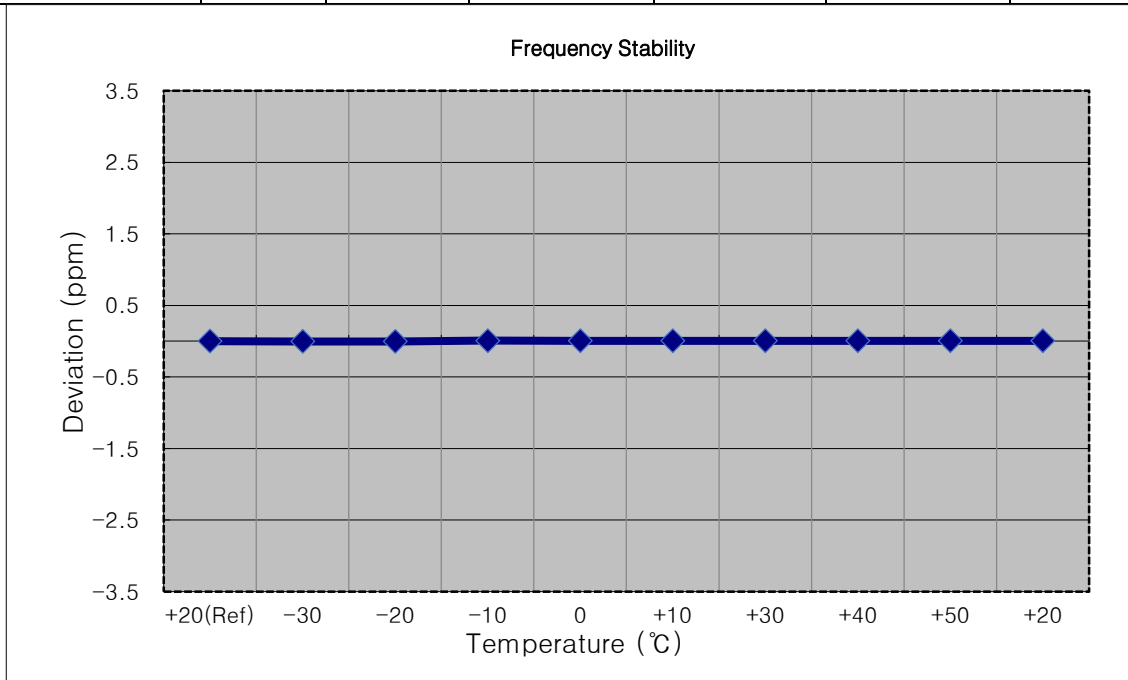




- ▣ MODE: LTE B12
- ▣ OPERATING FREQUENCY: 704,000,000 Hz
- ▣ CHANNEL: 23060 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	704 000 003	0.0	0.000 000	0.000
100%		-30	703 999 999	-3.7	-0.000 001	-0.005
100%		-20	704 000 001	-2.0	0.000 000	-0.003
100%		-10	704 000 007	4.7	0.000 001	0.007
100%		0	704 000 006	3.4	0.000 000	0.005
100%		+10	704 000 005	2.6	0.000 000	0.004
100%		+30	704 000 007	4.7	0.000 001	0.007
100%		+40	704 000 006	3.7	0.000 001	0.005
100%		+50	704 000 000	-2.1	0.000 000	-0.003
Batt. Endpoint	3.500	+20	704 000 005	2.3	0.000 000	0.003

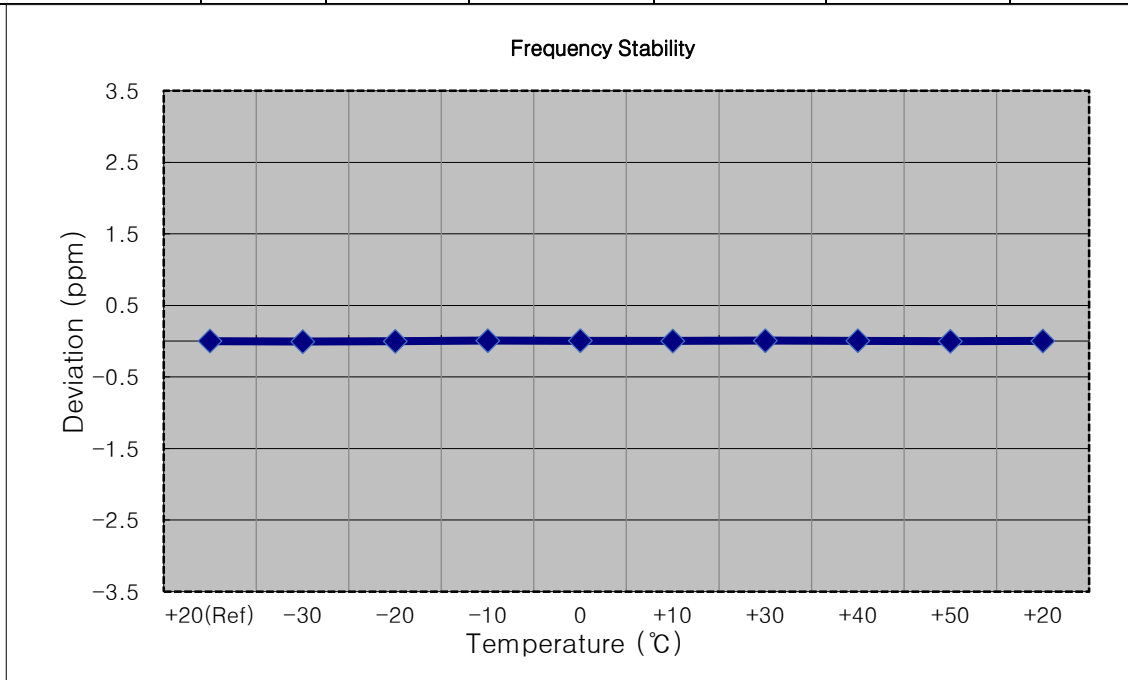


- ▣ MODE: LTE B12
- ▣ OPERATING FREQUENCY: 707,500,000 Hz
- ▣ CHANNEL: 23095 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	707 500 003	0.0	0.000 000	0.000
100%		-30	707 500 005	1.7	0.000 000	0.002
100%		-20	707 500 005	1.7	0.000 000	0.002
100%		-10	707 500 000	-3.1	0.000 000	-0.004
100%		0	707 500 005	2.2	0.000 000	0.003
100%		+10	707 500 005	1.9	0.000 000	0.003
100%		+30	707 500 005	2.1	0.000 000	0.003
100%		+40	707 500 001	-2.0	0.000 000	-0.003
100%		+50	707 500 004	1.5	0.000 000	0.002
Batt. Endpoint	3.500	+20	707 500 005	2.2	0.000 000	0.003

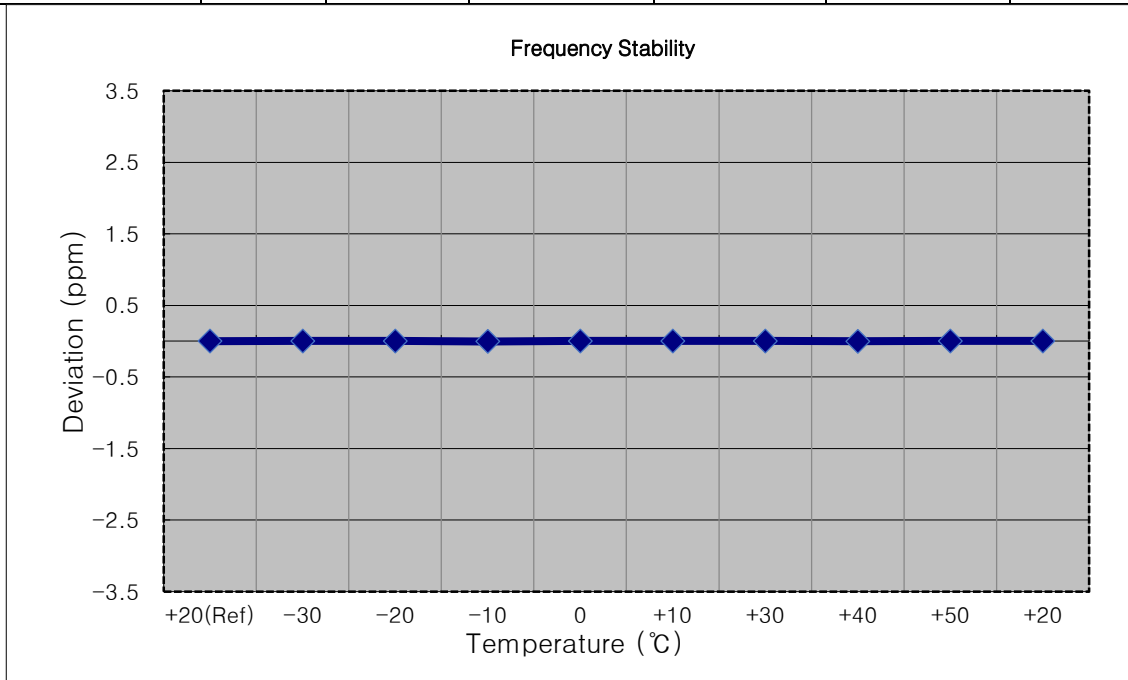


- ▣ MODE: LTE B12
- ▣ OPERATING FREQUENCY: 707,500,000 Hz
- ▣ CHANNEL: 23095 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	707 499 997	0.0	0.000 000	0.000
100%		-30	707 499 994	-3.1	0.000 000	-0.004
100%		-20	707 500 000	2.5	0.000 000	0.004
100%		-10	707 499 995	-2.4	0.000 000	-0.003
100%		0	707 499 994	-3.6	-0.000 001	-0.005
100%		+10	707 499 993	-4.3	-0.000 001	-0.006
100%		+30	707 499 994	-3.0	0.000 000	-0.004
100%		+40	707 499 995	-2.4	0.000 000	-0.003
100%		+50	707 499 995	-2.5	0.000 000	-0.004
Batt. Endpoint		3.500	+20	707 499 995	-1.7	0.000 000

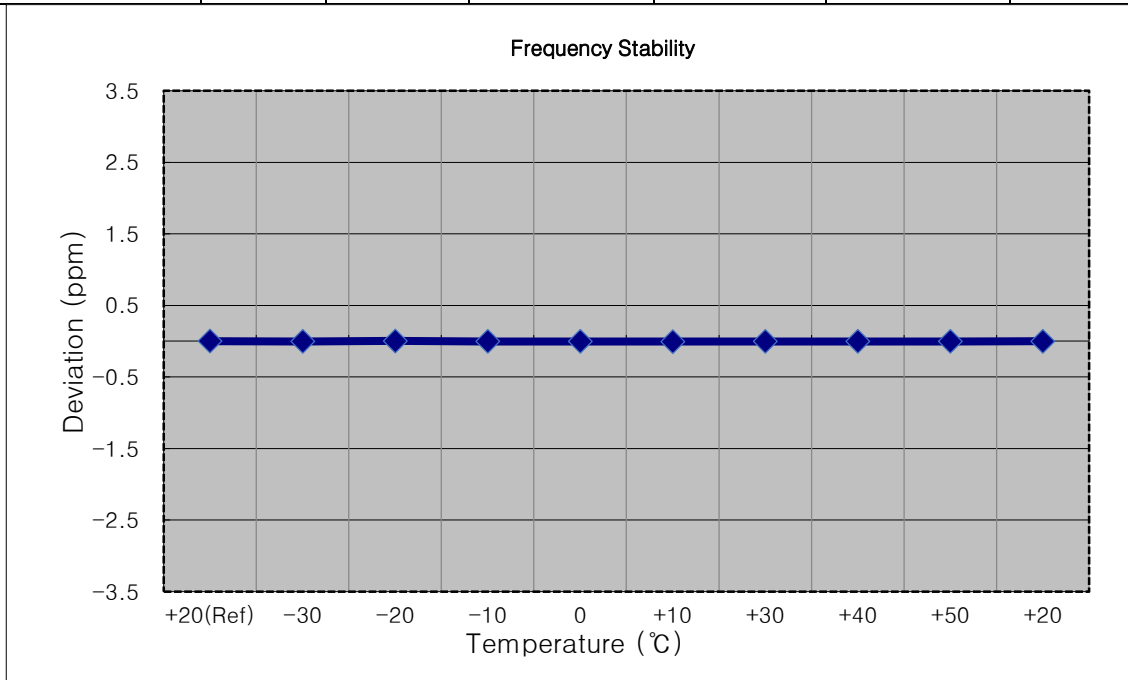


- ▣ MODE: LTE B12
- ▣ OPERATING FREQUENCY: 707,500,000 Hz
- ▣ CHANNEL: 23095 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	707 500 005	0.0	0.000 000	0.000
100%		-30	707 500 008	3.0	0.000 000	0.004
100%		-20	707 500 008	3.4	0.000 000	0.005
100%		-10	707 500 008	3.2	0.000 000	0.005
100%		0	707 500 008	3.9	0.000 001	0.006
100%		+10	707 500 009	4.7	0.000 001	0.007
100%		+30	707 500 008	3.1	0.000 000	0.004
100%		+40	707 500 008	3.5	0.000 000	0.005
100%		+50	707 500 008	3.5	0.000 000	0.005
Batt. Endpoint		3.500	+20	707 500 007	2.9	0.000 000

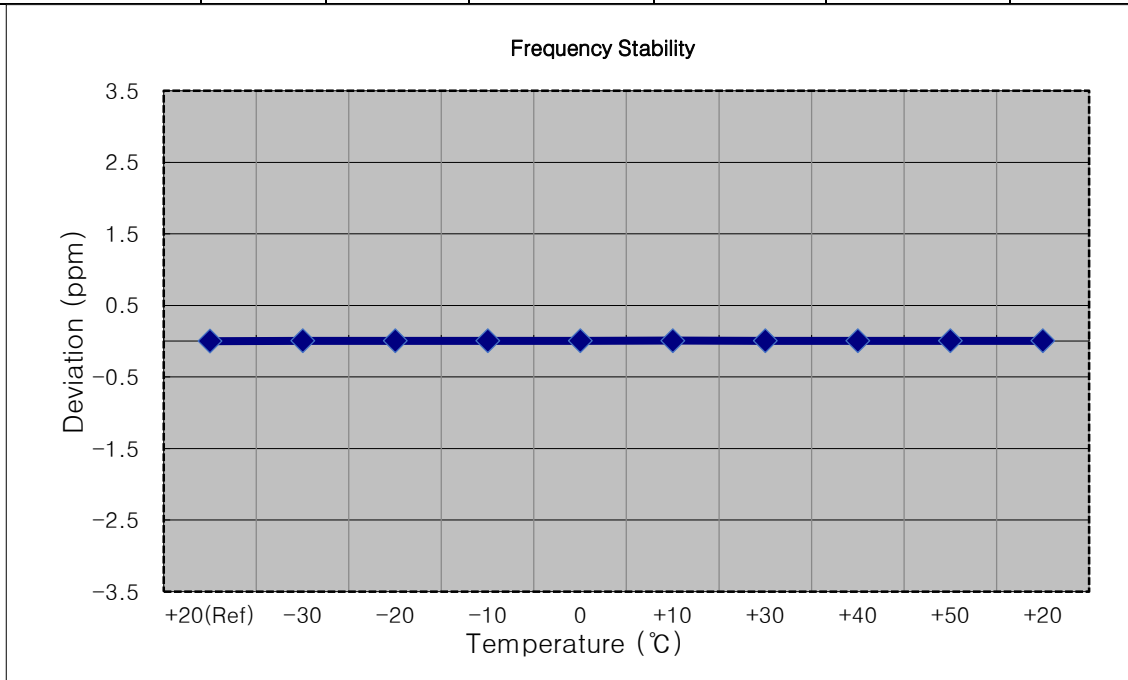


- ▣ MODE: LTE B12
- ▣ OPERATING FREQUENCY: 707,500,000 Hz
- ▣ CHANNEL: 23095 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	707 500 004	0.0	0.000 000	0.000
100%		-30	707 500 006	2.6	0.000 000	0.004
100%		-20	707 500 006	2.4	0.000 000	0.003
100%		-10	707 500 008	4.0	0.000 001	0.006
100%		0	707 500 007	3.0	0.000 000	0.004
100%		+10	707 500 001	-2.2	0.000 000	-0.003
100%		+30	707 500 008	4.5	0.000 001	0.006
100%		+40	707 500 007	2.9	0.000 000	0.004
100%		+50	707 500 006	2.4	0.000 000	0.003
Batt. Endpoint		3.500	+20	707 500 007	2.9	0.000 000

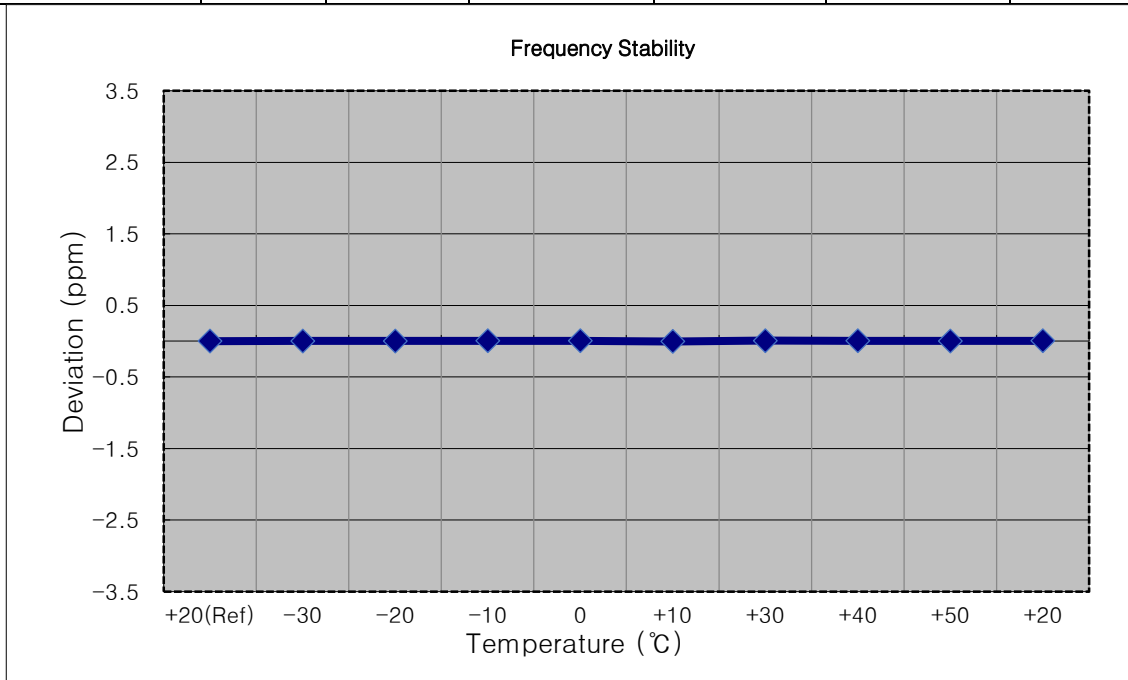


- ▣ MODE: LTE B12
- ▣ OPERATING FREQUENCY: 715,300,000 Hz
- ▣ CHANNEL: 23173 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	715 299 996	0.0	0.000 000	0.000
100%		-30	715 300 003	7.0	0.000 001	0.010
100%		-20	715 299 993	-3.1	0.000 000	-0.004
100%		-10	715 300 001	4.6	0.000 001	0.006
100%		0	715 300 001	4.3	0.000 001	0.006
100%		+10	715 299 992	-4.3	-0.000 001	-0.006
100%		+30	715 300 003	6.3	0.000 001	0.009
100%		+40	715 299 992	-4.7	-0.000 001	-0.007
100%		+50	715 300 003	6.5	0.000 001	0.009
Batt. Endpoint	3.500	+20	715 300 001	4.5	0.000 001	0.006

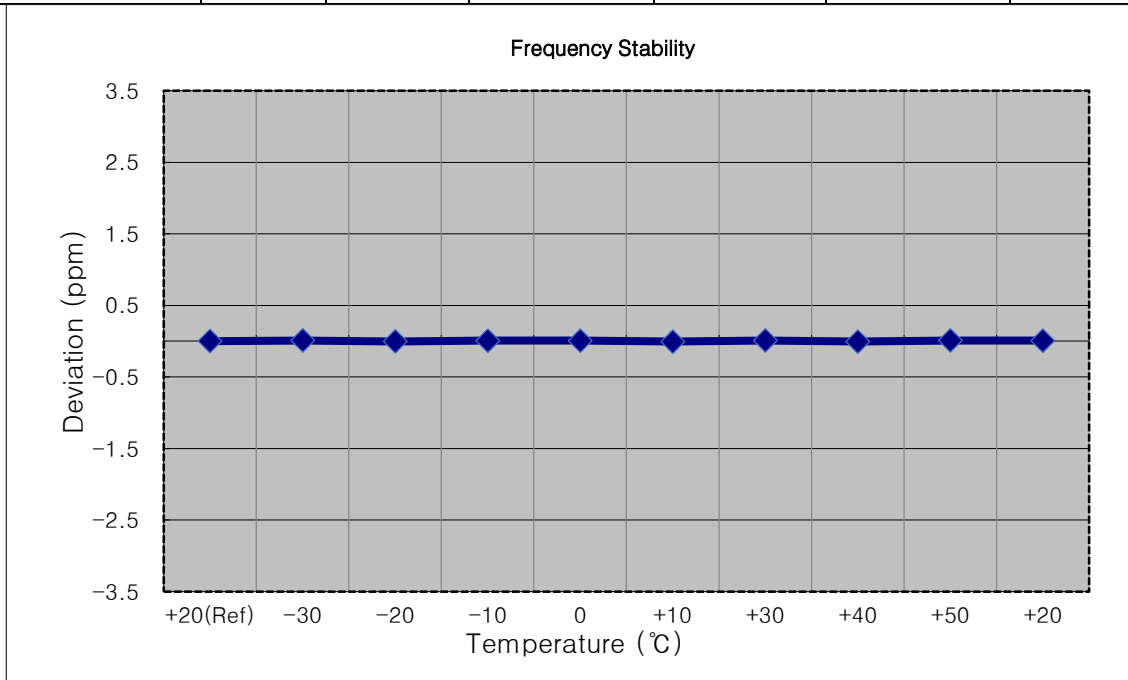


- ▣ MODE: LTE B12
- ▣ OPERATING FREQUENCY: 714,500,000 Hz
- ▣ CHANNEL: 23165 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	714 500 010	0.0	0.000 000	0.000
100%		-30	714 500 000	-10.0	-0.000 001	-0.014
100%		-20	714 500 021	11.0	0.000 002	0.015
100%		-10	714 500 021	11.2	0.000 002	0.016
100%		0	714 500 020	9.9	0.000 001	0.014
100%		+10	714 500 003	-7.1	-0.000 001	-0.010
100%		+30	714 500 020	10.6	0.000 001	0.015
100%		+40	714 500 021	10.9	0.000 002	0.015
100%		+50	714 500 020	9.8	0.000 001	0.014
Batt. Endpoint		3.500	+20	714 500 001	-9.2	-0.000 001

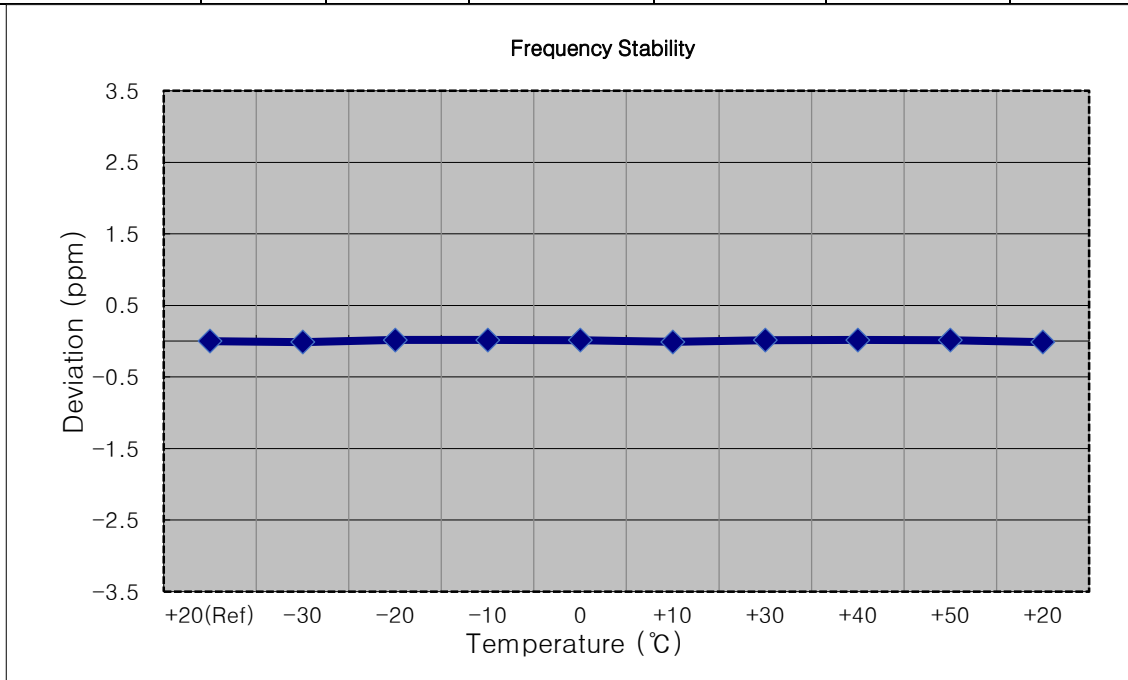

- ▣ MODE: LTE B12
- ▣ OPERATING FREQUENCY: 713,500,000 Hz
- ▣ CHANNEL: 23155 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	713 499 997	0.0	0.000 000	0.000
100%		-30	713 500 000	3.1	0.000 000	0.004
100%		-20	713 500 000	3.6	0.000 001	0.005
100%		-10	713 499 992	-5.1	-0.000 001	-0.007
100%		0	713 500 000	2.8	0.000 000	0.004
100%		+10	713 499 999	2.5	0.000 000	0.004
100%		+30	713 500 001	4.5	0.000 001	0.006
100%		+40	713 499 994	-2.8	0.000 000	-0.004
100%		+50	713 500 003	6.1	0.000 001	0.009
Batt. Endpoint		3.500	+20	713 500 001	4.3	0.000 001

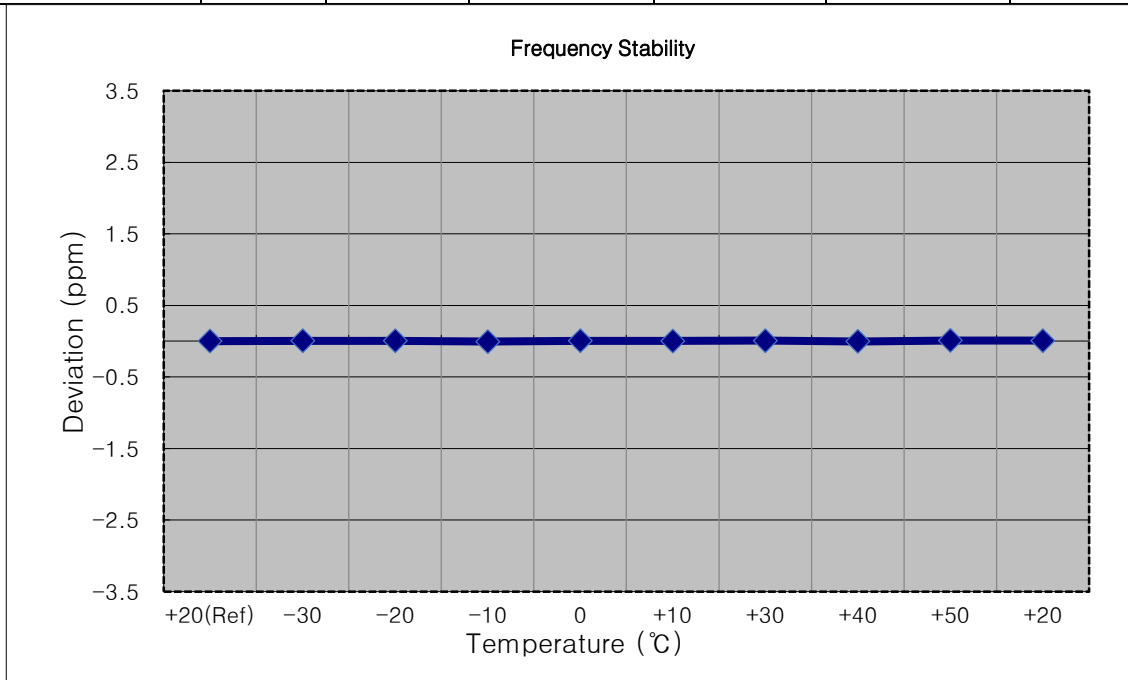



- ▣ MODE: LTE B12
- ▣ OPERATING FREQUENCY: 711,000,000 Hz
- ▣ CHANNEL: 23130 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	710 999 995	0.0	0.000 000	0.000
100%		-30	710 999 991	-4.0	-0.000 001	-0.006
100%		-20	710 999 989	-5.6	-0.000 001	-0.008
100%		-10	710 999 989	-5.9	-0.000 001	-0.008
100%		0	710 999 990	-4.5	-0.000 001	-0.006
100%		+10	710 999 990	-5.1	-0.000 001	-0.007
100%		+30	711 000 000	4.9	0.000 001	0.007
100%		+40	710 999 988	-7.0	-0.000 001	-0.010
100%		+50	711 000 000	5.2	0.000 001	0.007
Batt. Endpoint		3.500	+20	710 999 998	3.5	0.000 000

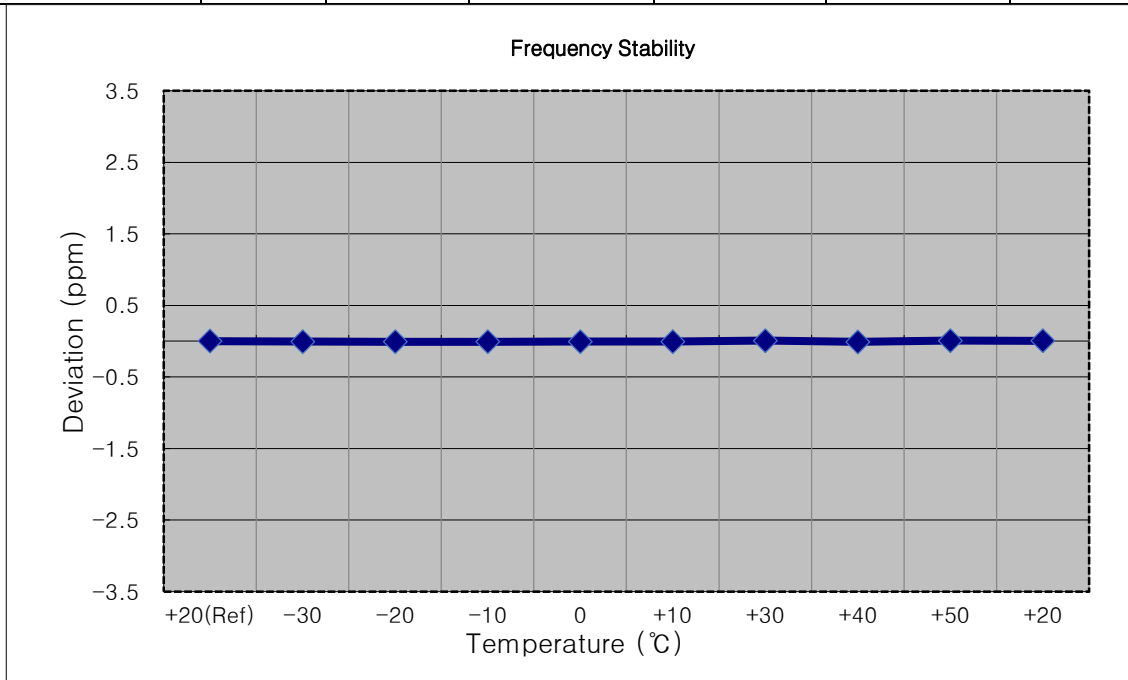

### 8.7 RECEIVER SPURIOUS EMISSIONS

Frequency Range : 30 MHz ~ 1 GHz

Frequency	Reading	Ant. factor+Cable loss- Amp Gain	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V	dB /m	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
No Peak Found						

Frequency Range : Above 1 GHz


Frequency	Reading	Ant. factor+Cable loss- Amp Gain	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V	dB /m	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
No Peak Found						

#### Limit


Frequency (MHz)	Field Strength ( $\mu$ v/m at 3 meters)
30 - 88	100
88 - 216	150
216 - 960	200
Above 960	500

## 9. TEST PLOTS


BAND 12. Occupied Bandwidth Plot (1.4M BW Ch.23095 QPSK\_RB6\_0)

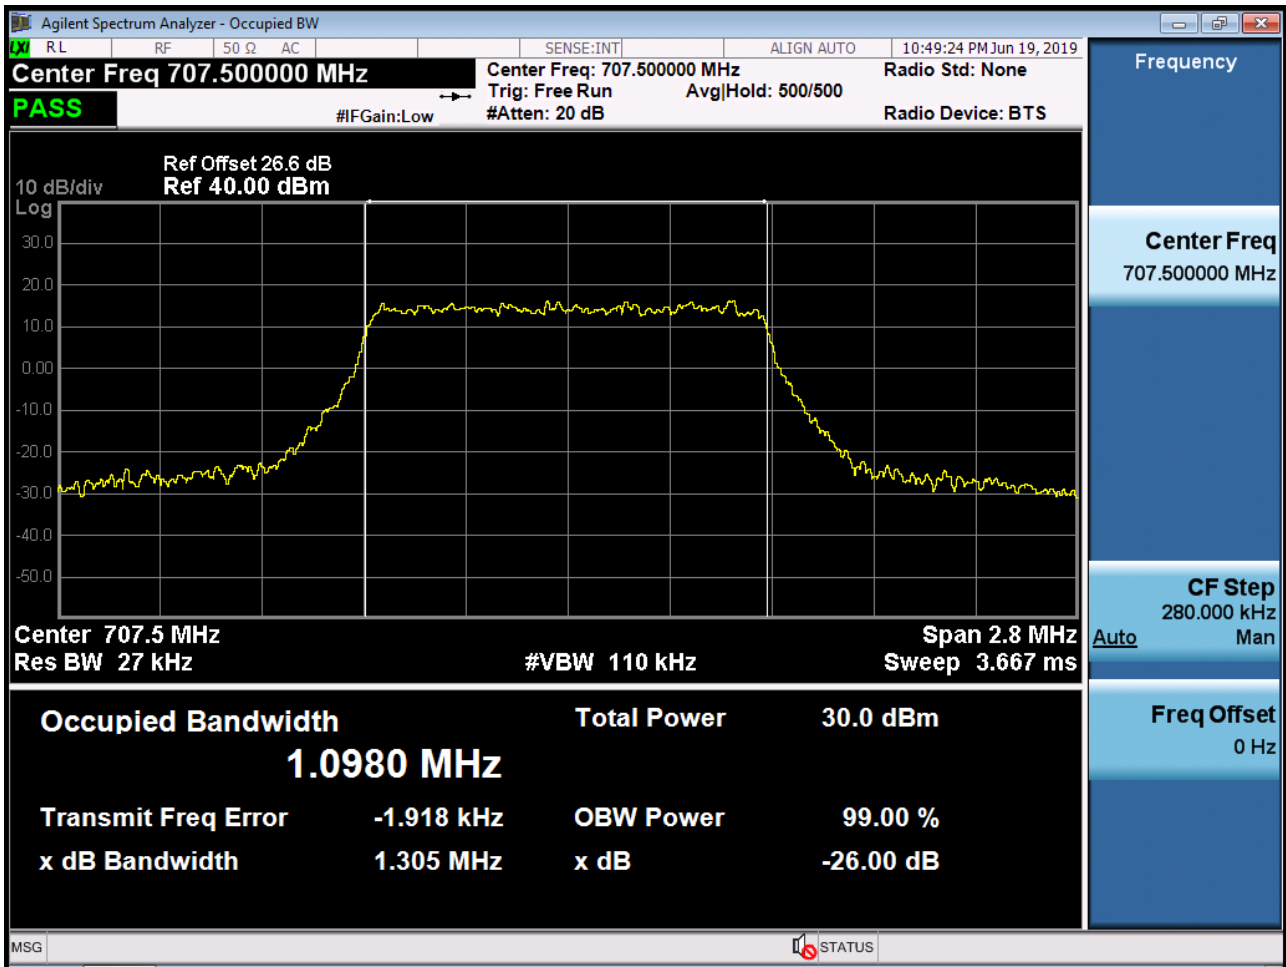


BAND 12. Occupied Bandwidth Plot (1.4M BW Ch.23095 16QAM\_RB6\_0)

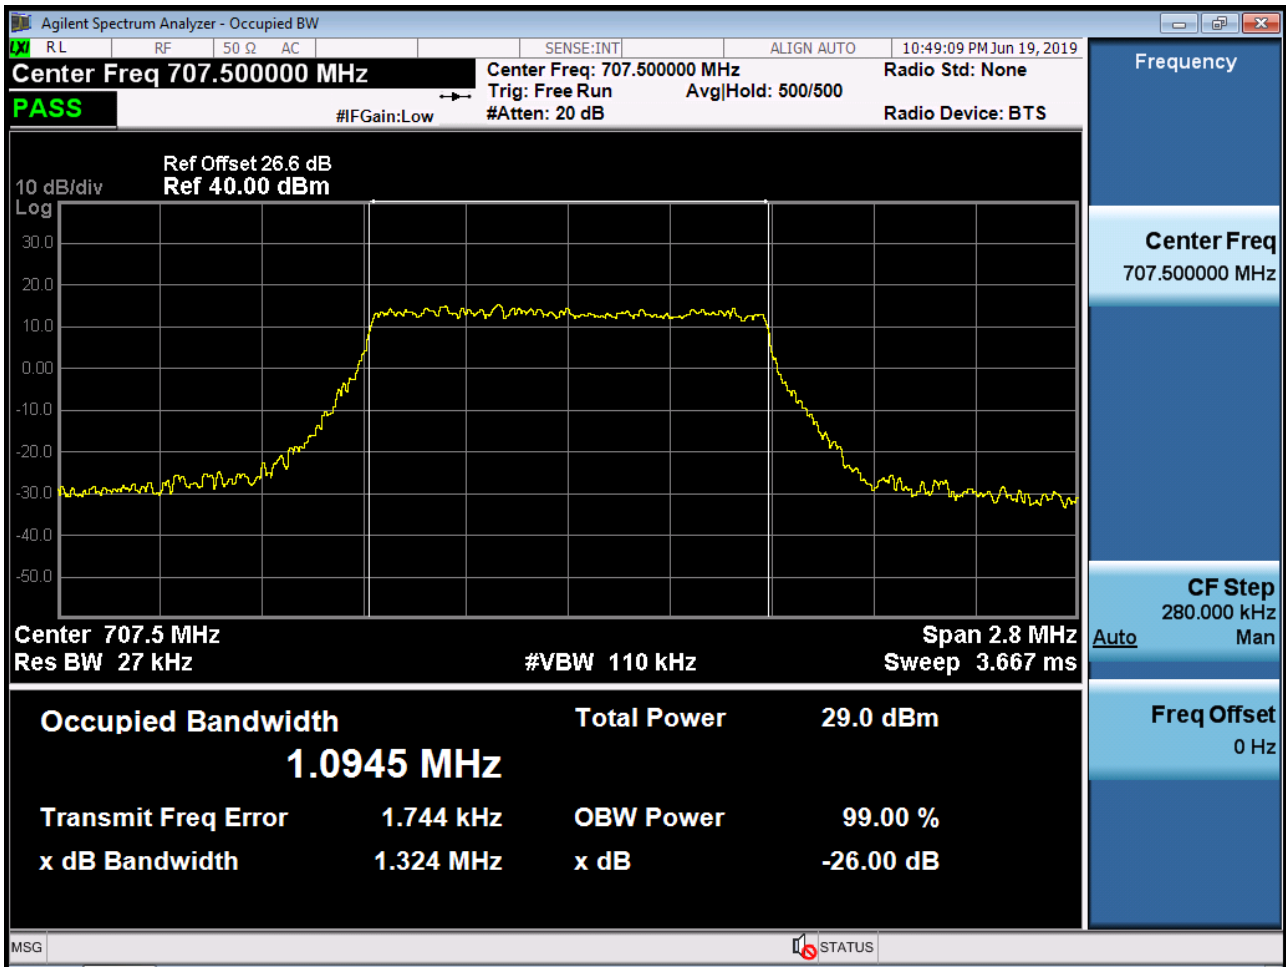


BAND 12. Occupied Bandwidth Plot (3M BW Ch.23095 QPSK\_RB15\_0)

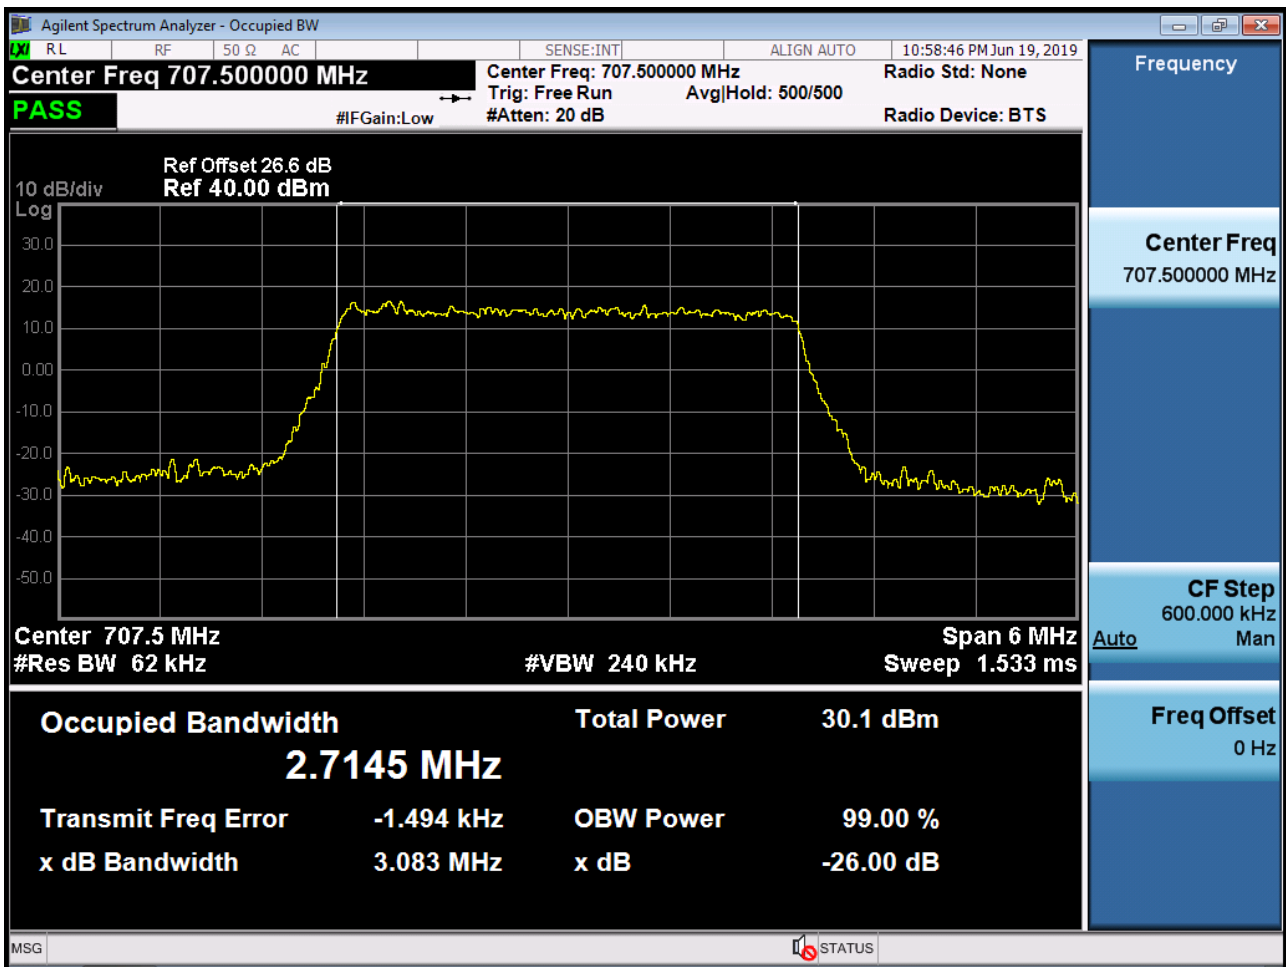

BAND 12. Occupied Bandwidth Plot (3M BW Ch.23095 16QAM\_RB15\_0)

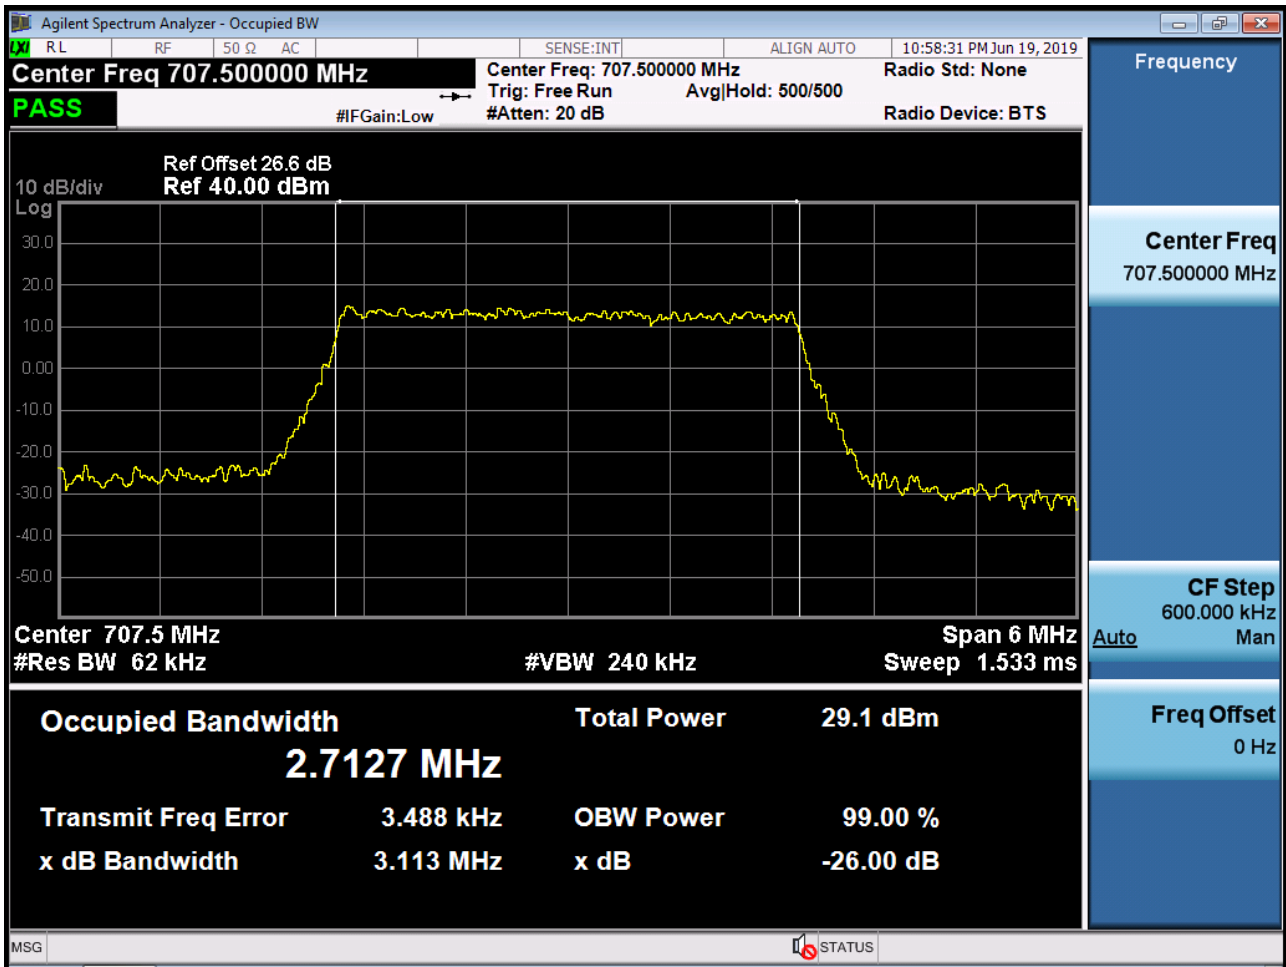


BAND 12. Occupied Bandwidth Plot (5M BW Ch.23095 QPSK\_RB25\_0)

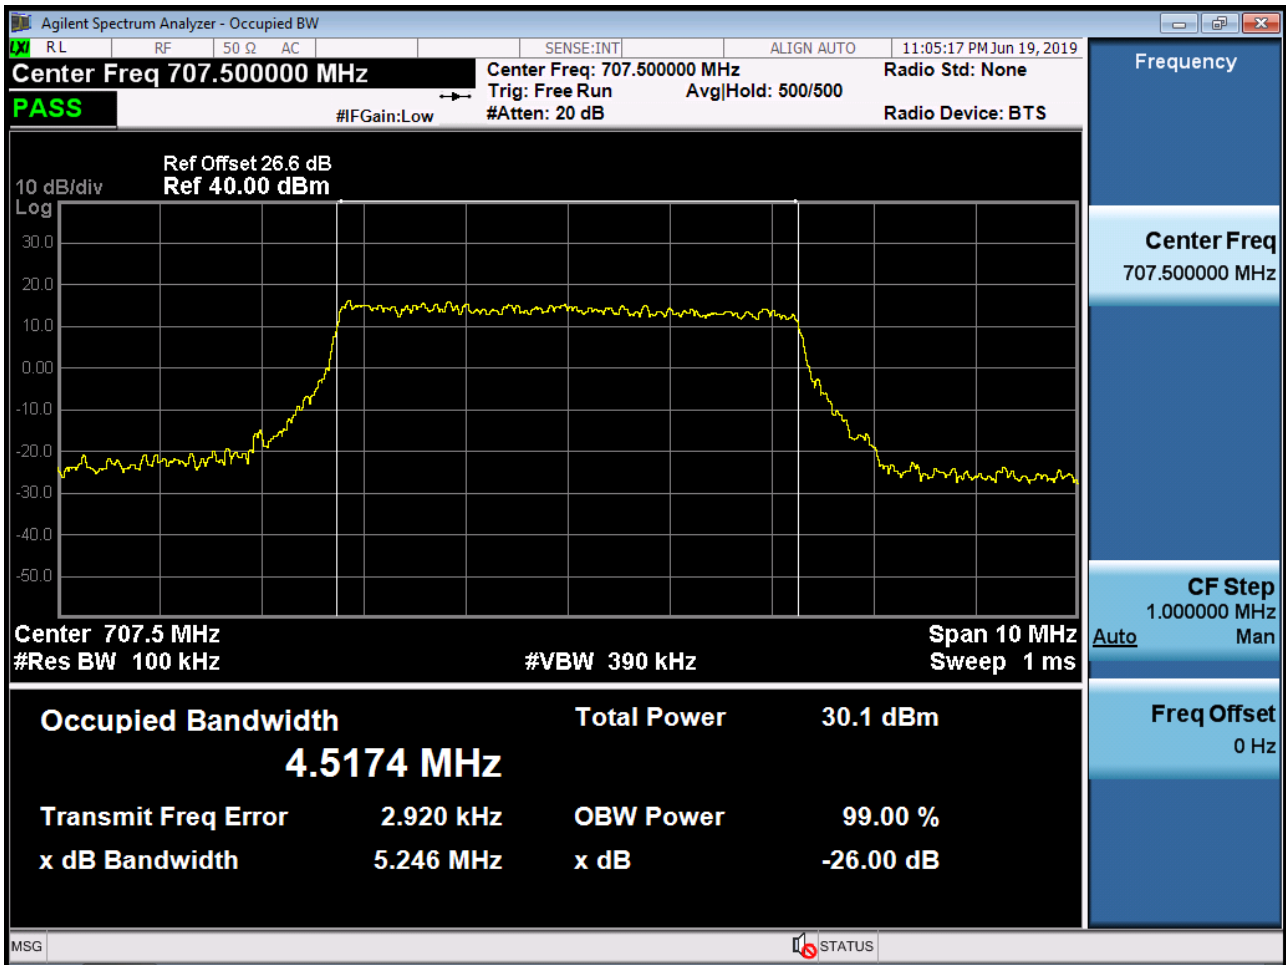





BAND 12. Occupied Bandwidth Plot (5M BW Ch.23095 16QAM\_RB25\_0)

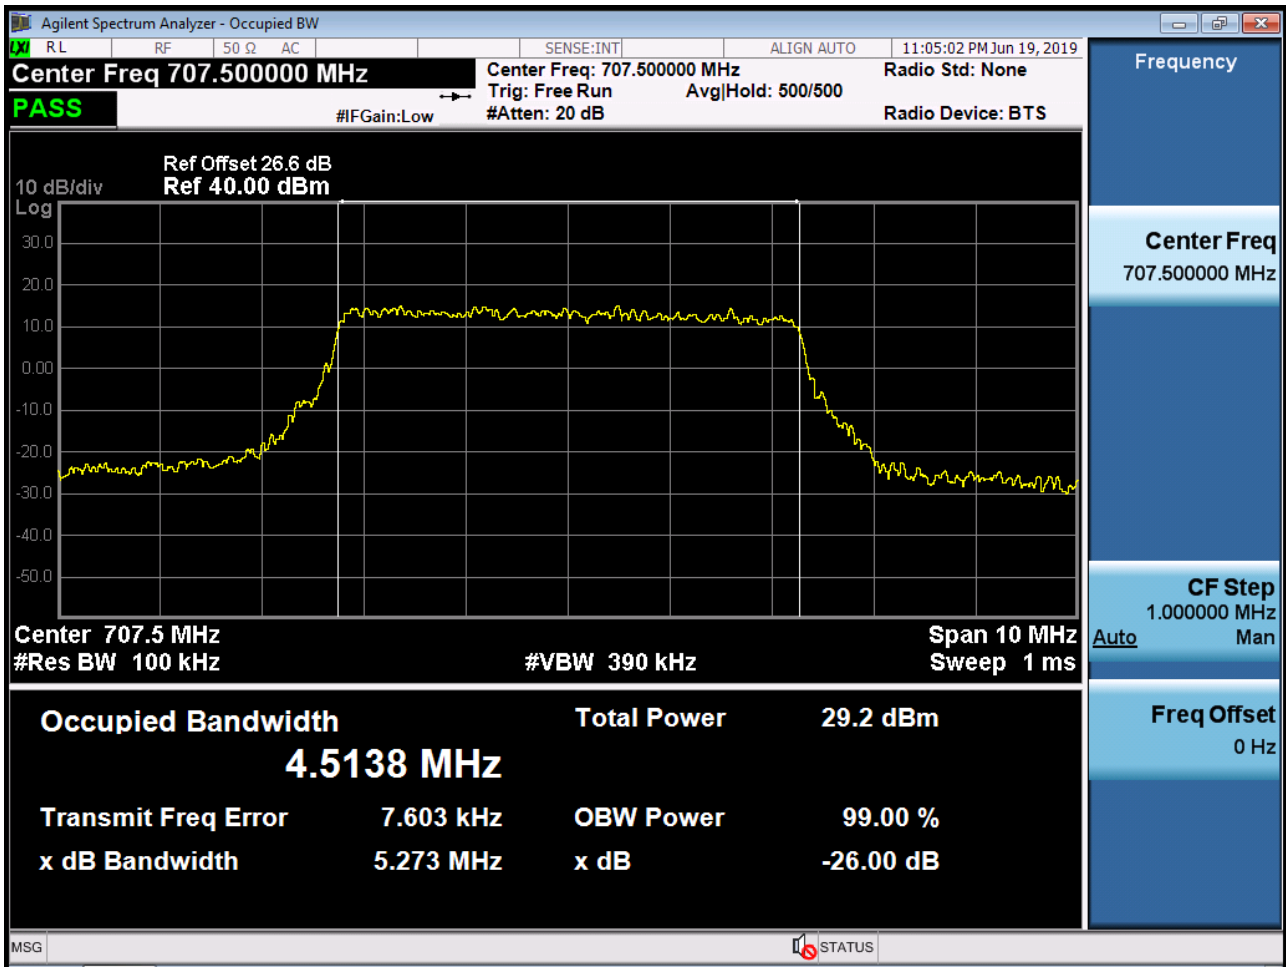


BAND 12. Occupied Bandwidth Plot (10M BW Ch.23095 QPSK\_RB50\_0)

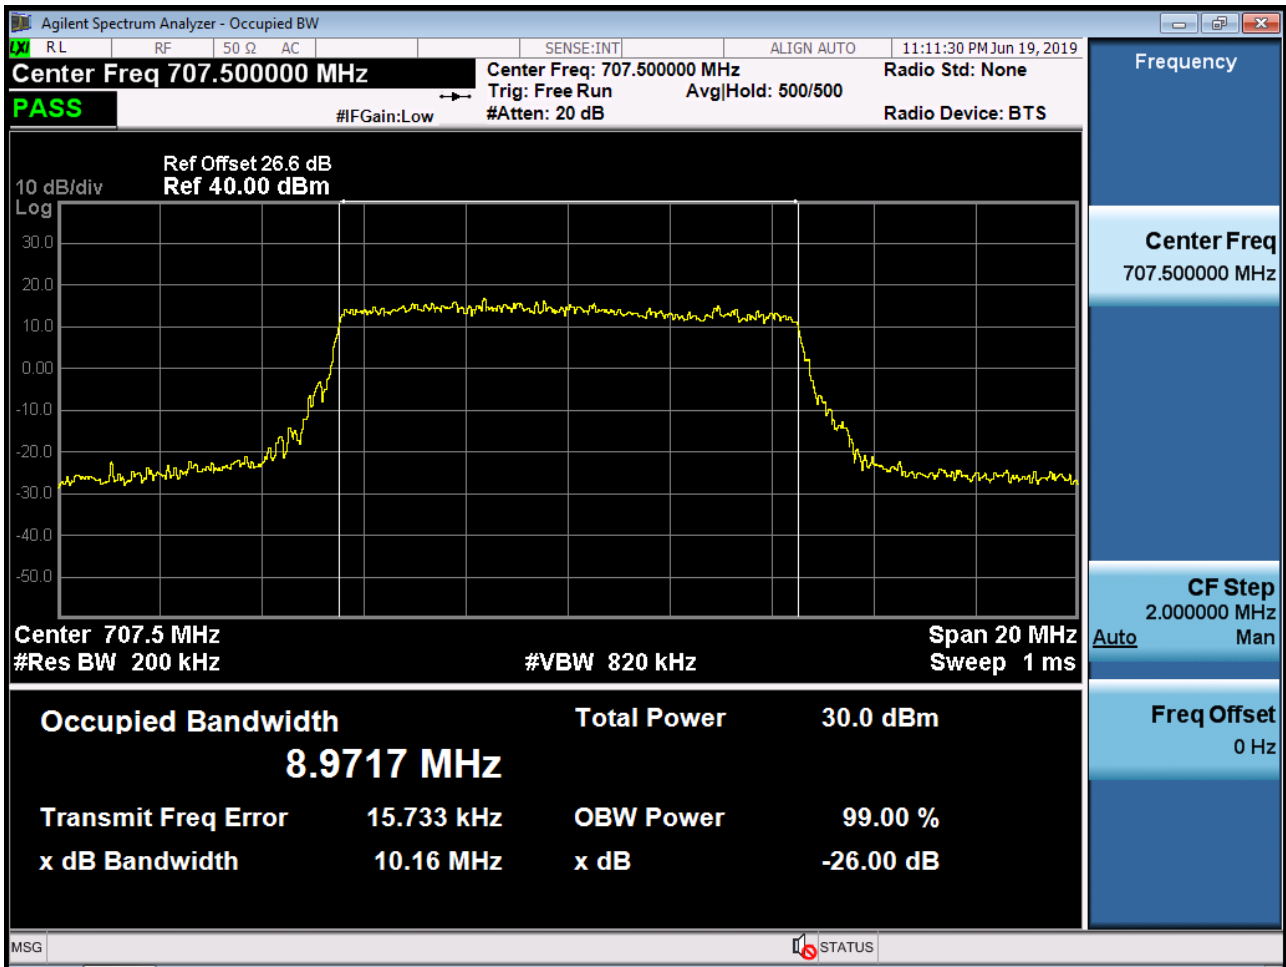


BAND 12. Occupied Bandwidth Plot (10M BW Ch.23095 16QAM\_RB50\_0)

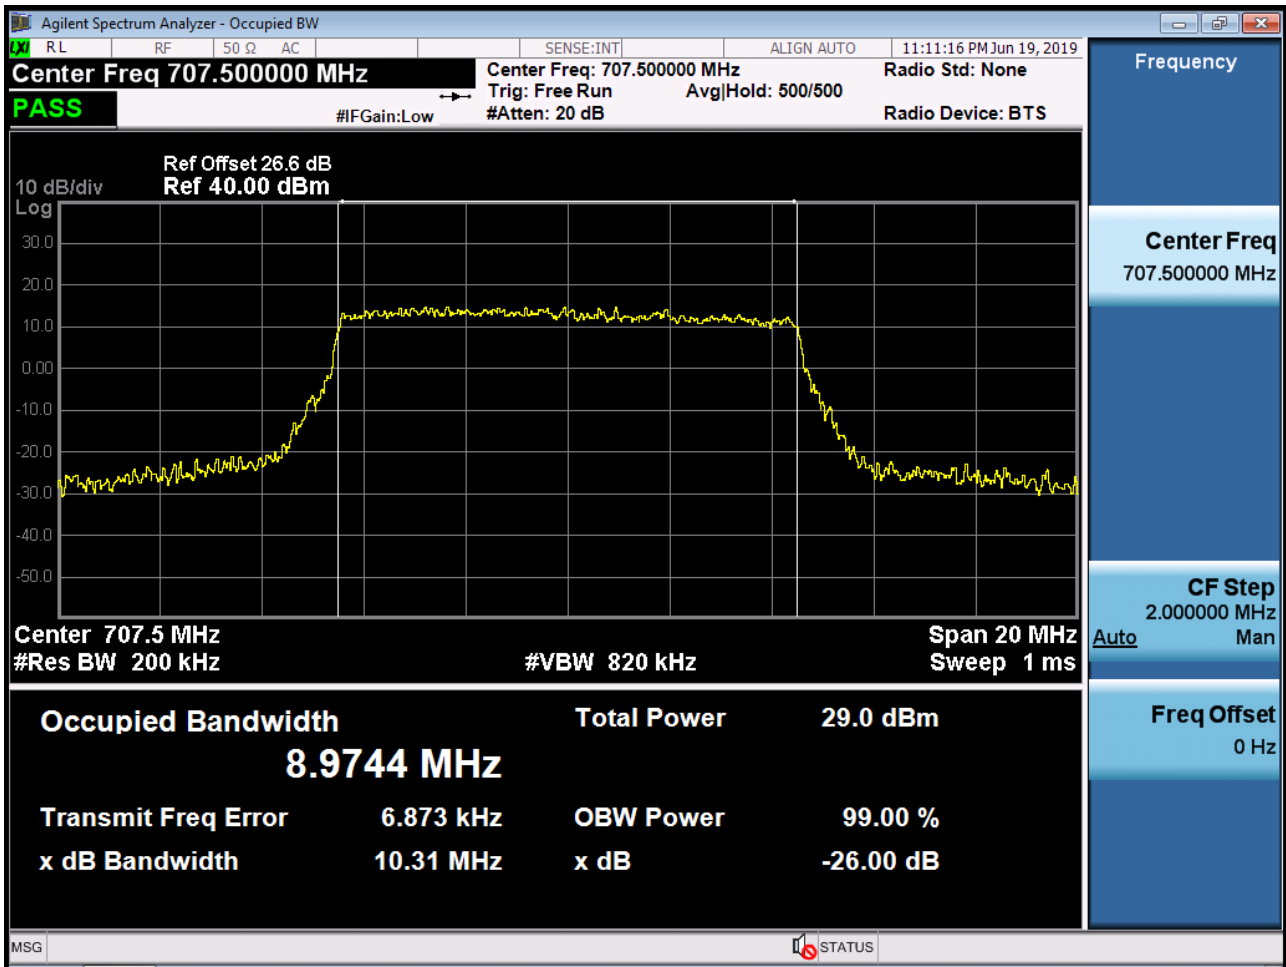


BAND 12. Lower Band Edge Plot (1.4M BW Ch.23017 QPSK\_RB1\_Offset 0)

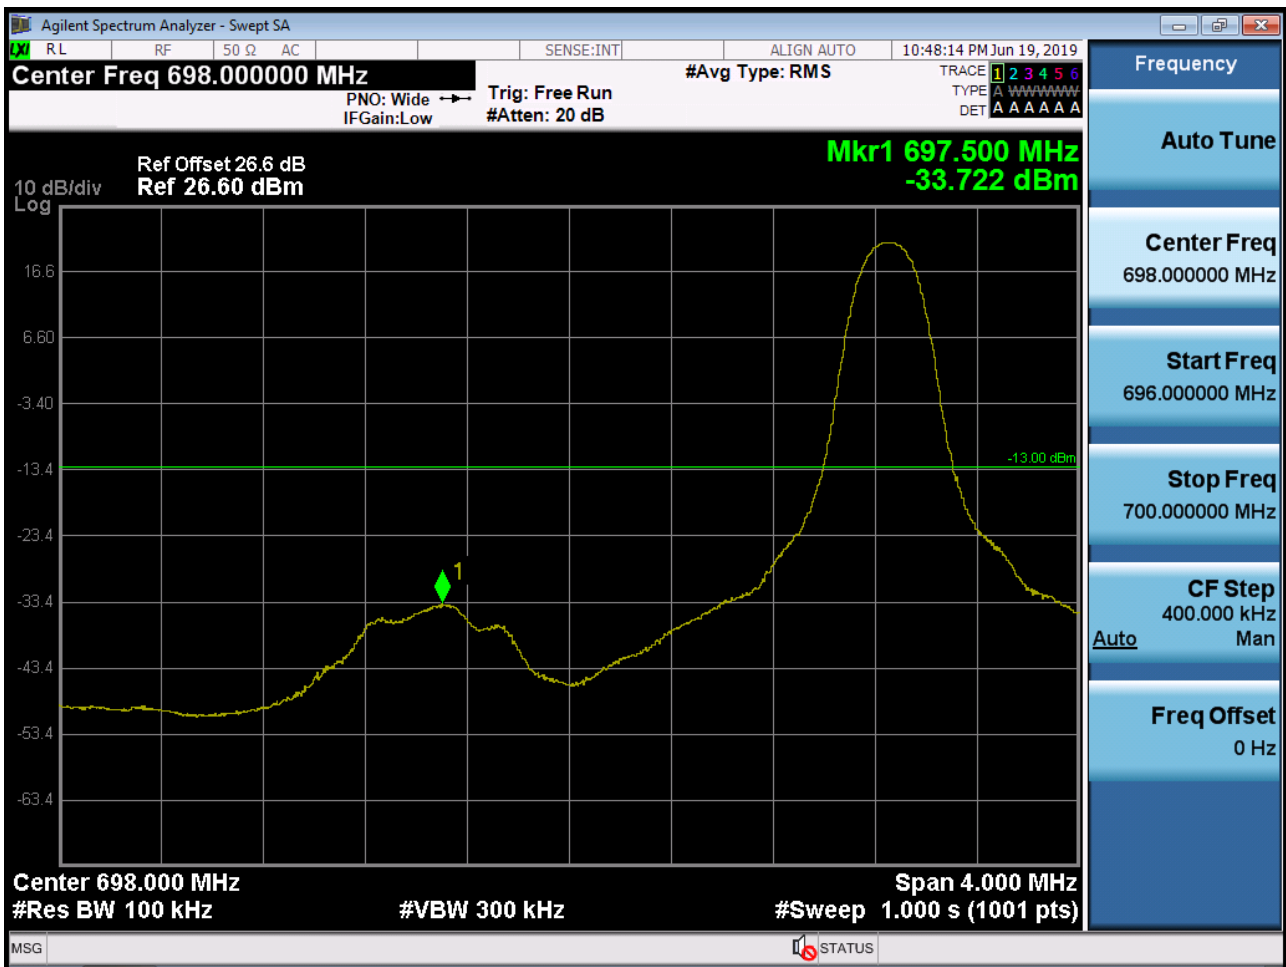

BAND 12. Lower Band Edge Plot (1.4M BW Ch.23017 QPSK\_RB6\_Offset 0)

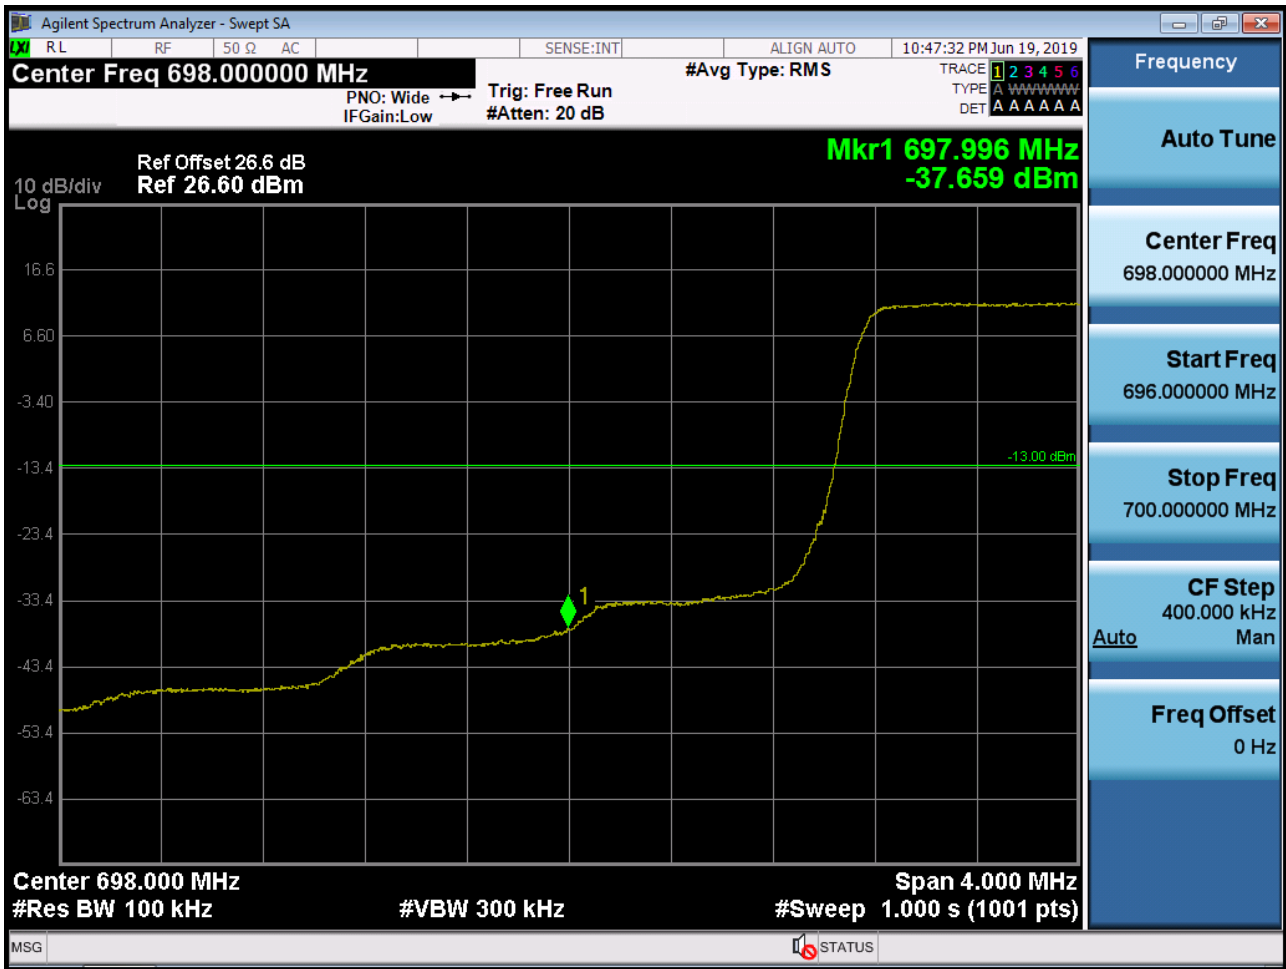


BAND 12. Lower Extended Band Edge Plot (1.4M BW Ch.23017 QPSK\_RB6\_0)

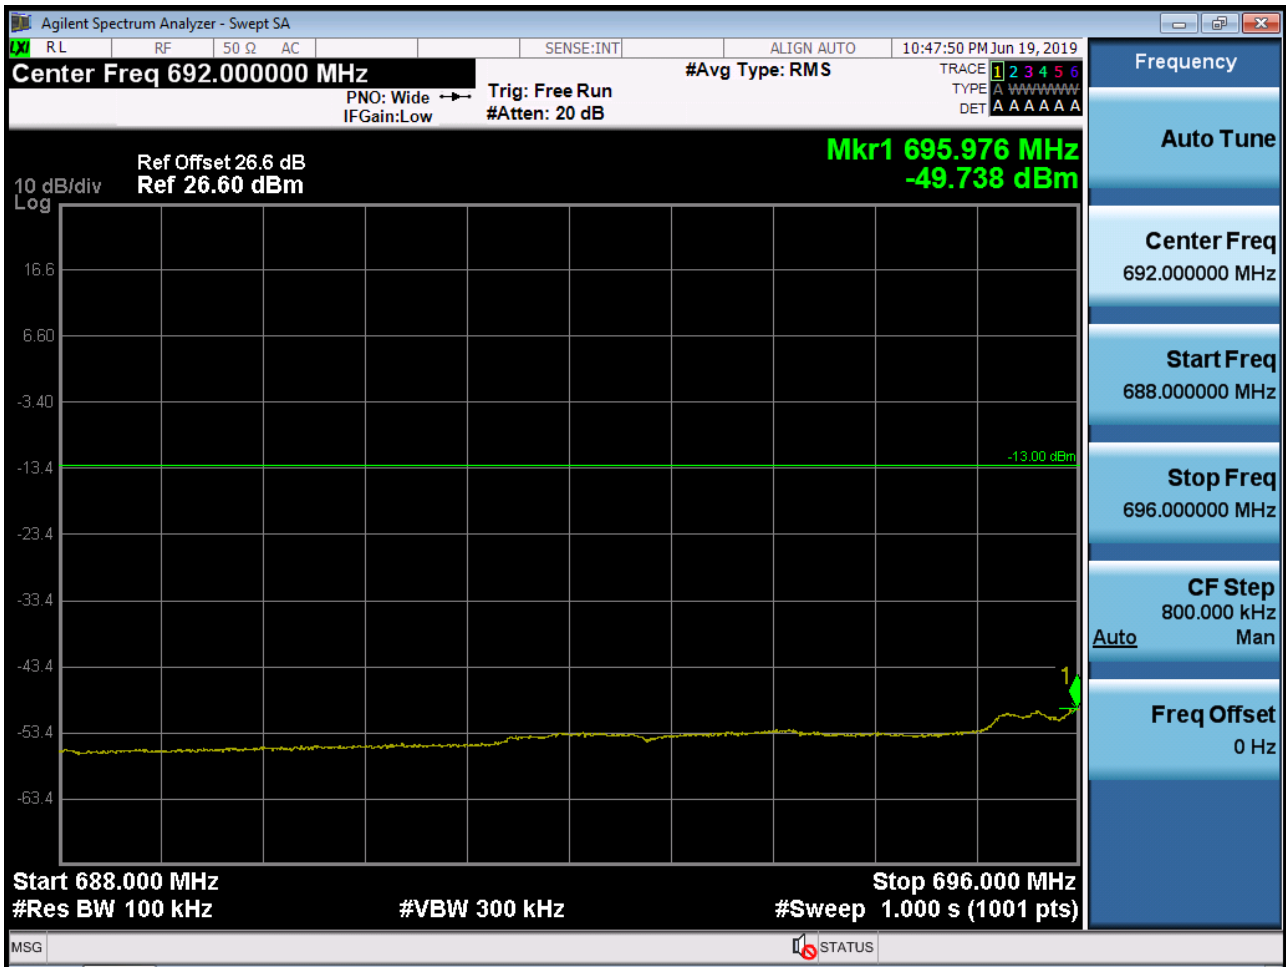

BAND 12. Lower Band Edge Plot (3M BW Ch.23025 QPSK\_RB1\_Offset 0)




BAND 12. Lower Band Edge Plot (3M BW Ch.23025 QPSK\_RB15\_Offset 0)

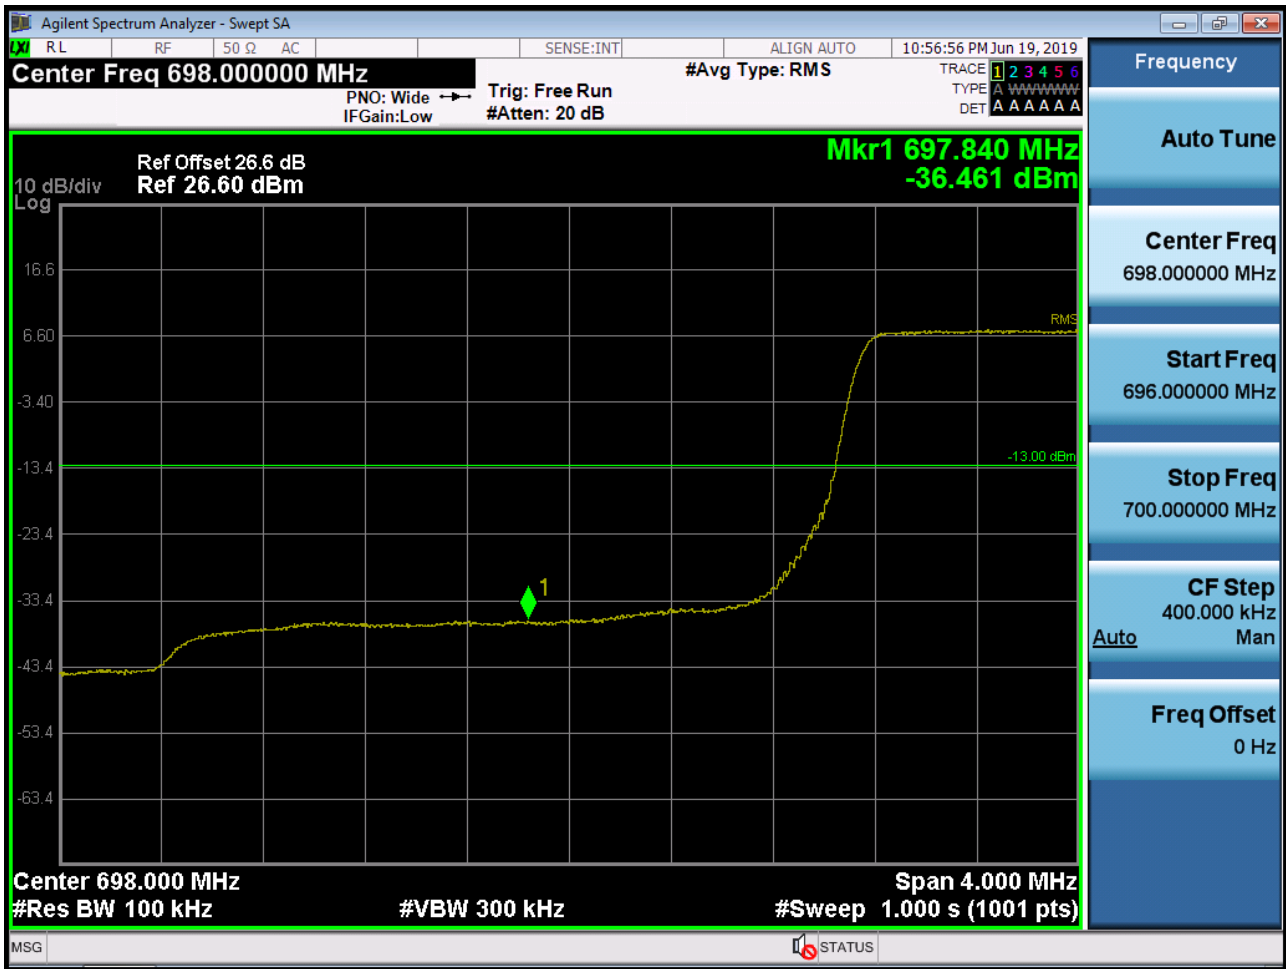




BAND 12. Lower Extended Band Edge Plot (3M BW Ch.23025 QPSK\_RB15\_0)

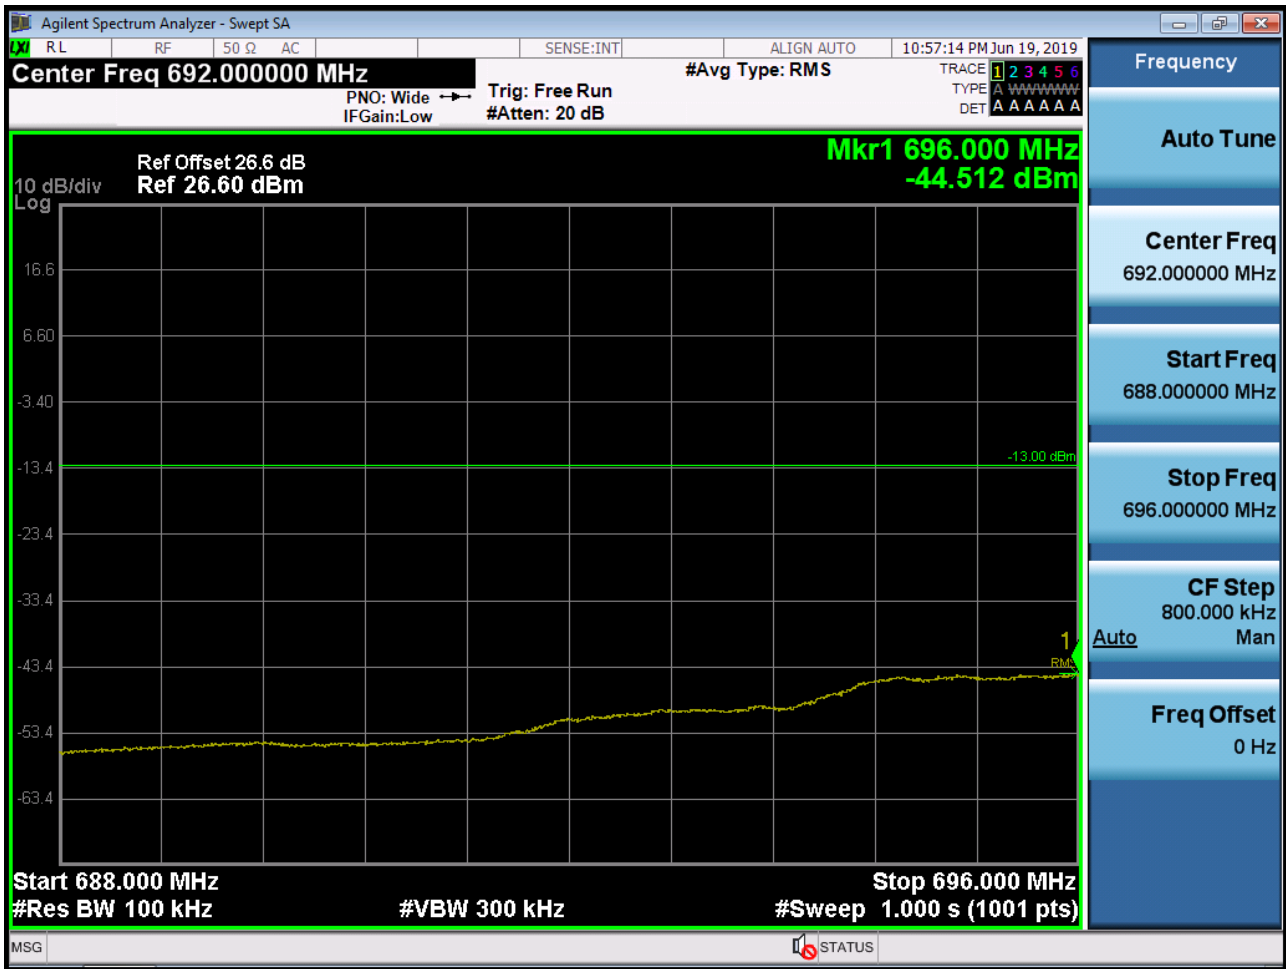


BAND 12. Lower Band Edge Plot (5M BW Ch.23035 QPSK\_RB1\_Offset 0)



### BAND 12. Lower Band Edge Plot (5M BW Ch.23035 QPSK\_RB25\_Offset 0)

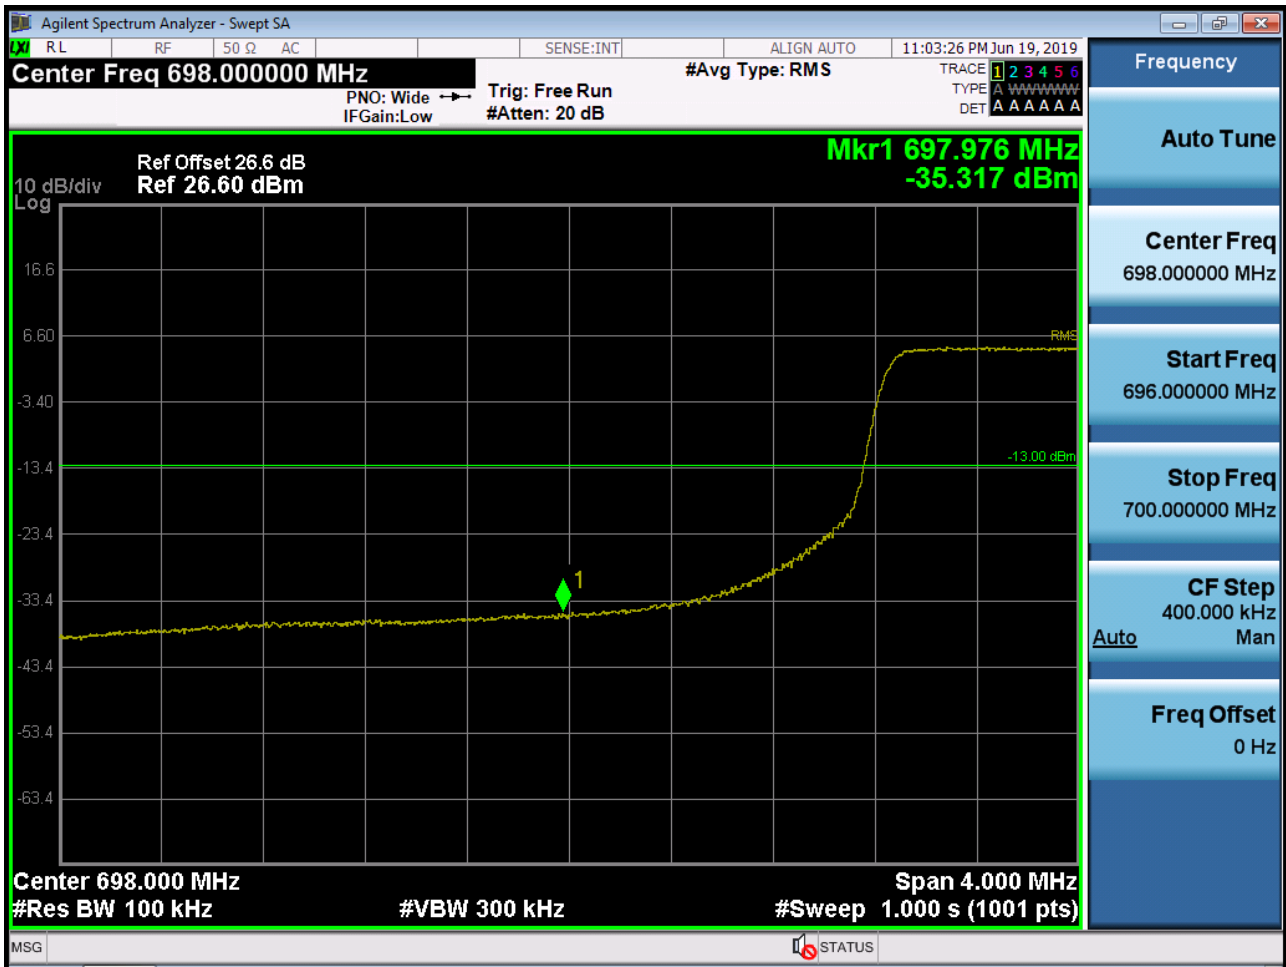


BAND 12. Lower Extended Band Edge Plot (5M BW Ch.23035 QPSK\_RB25\_0)

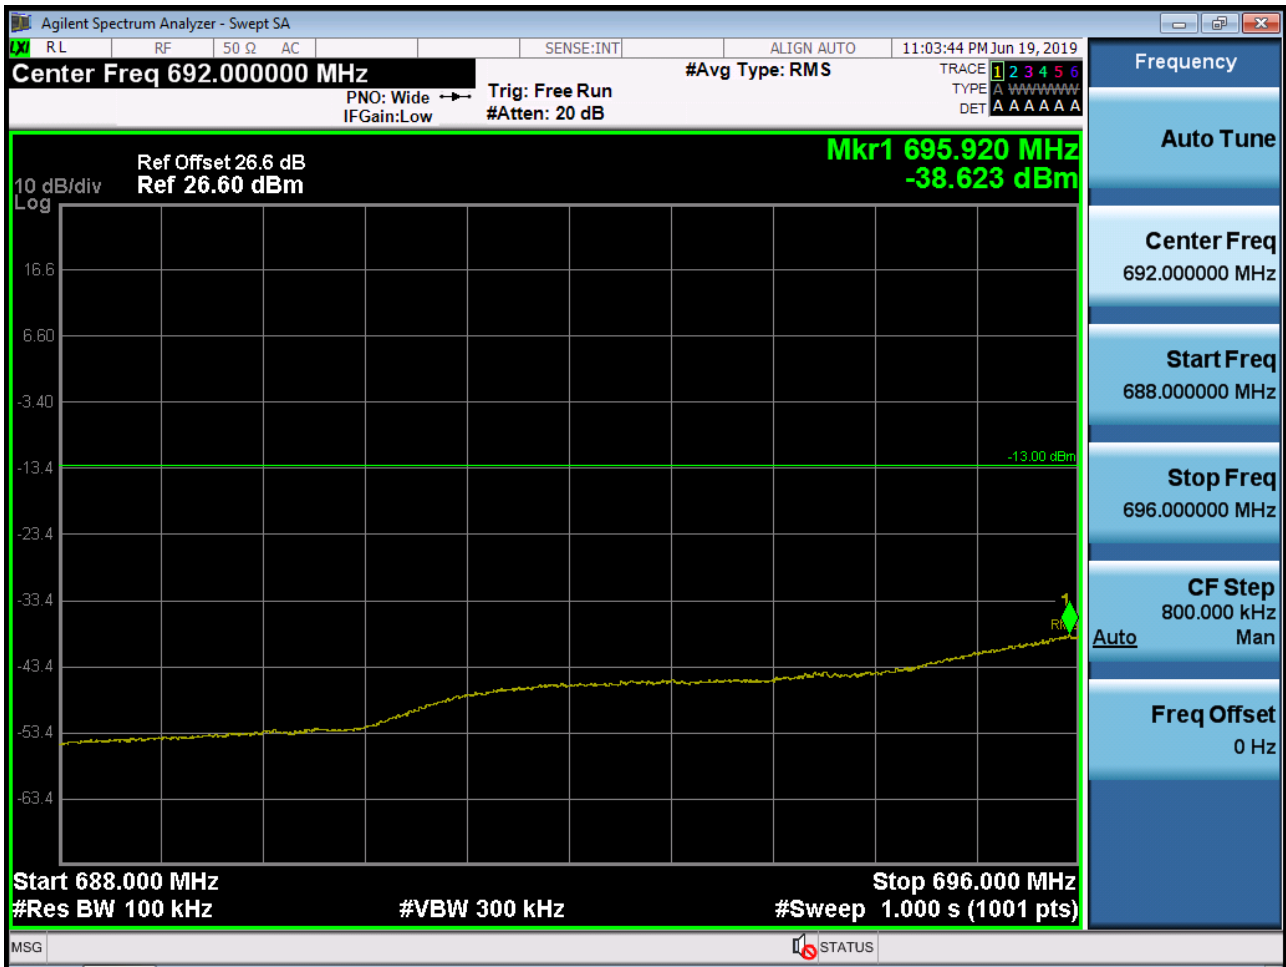


BAND 12. Lower Band Edge Plot (10M BW Ch.23060 QPSK\_RB1\_Offset 0)



BAND 12. Lower Band Edge Plot (10M BW Ch.23060 QPSK\_RB50\_Offset 0)

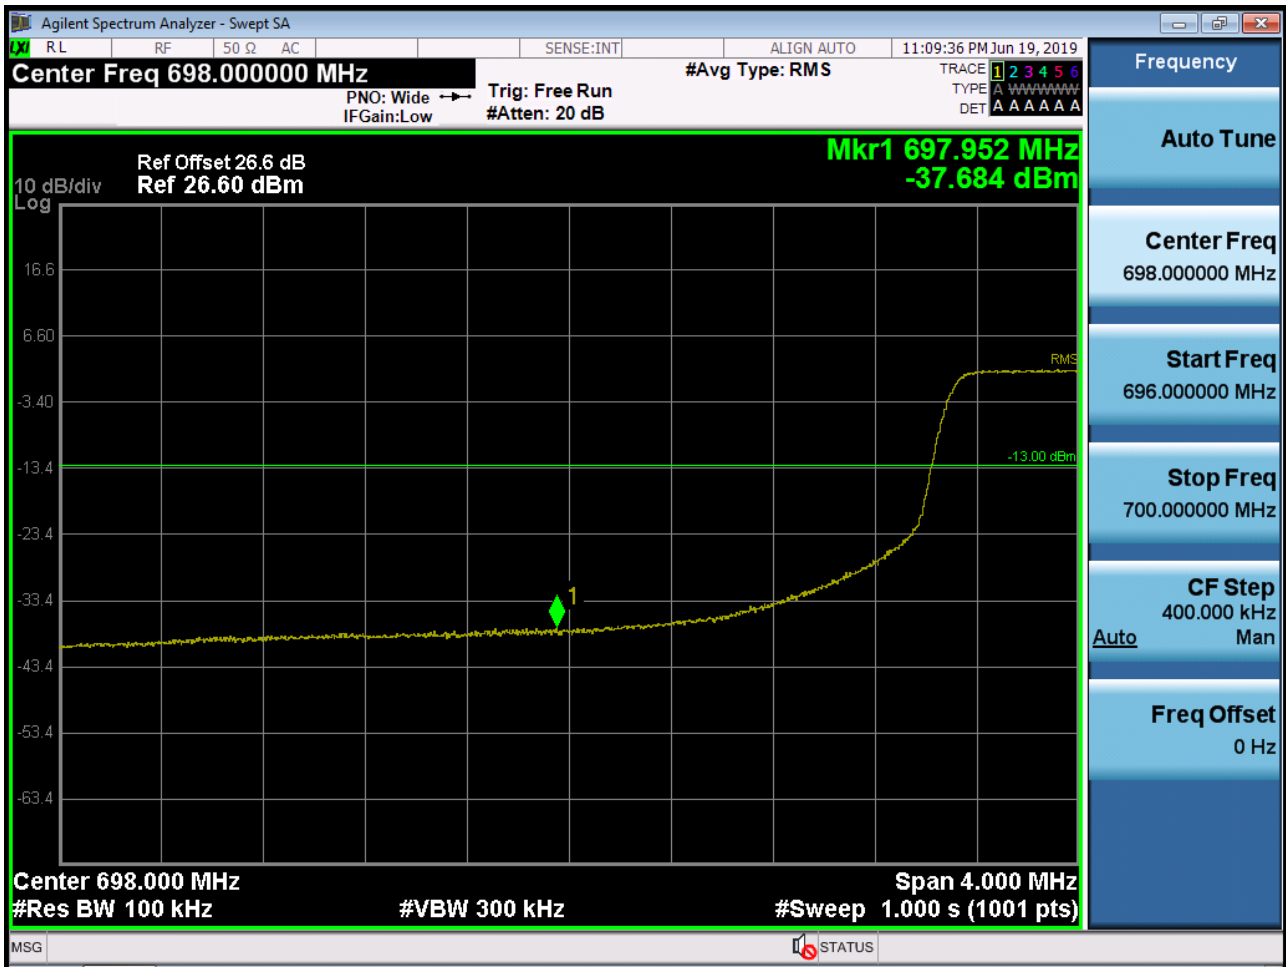

BAND 12. Lower Extended Band Edge Plot (10M BW Ch.23060 QPSK\_RB50\_0)

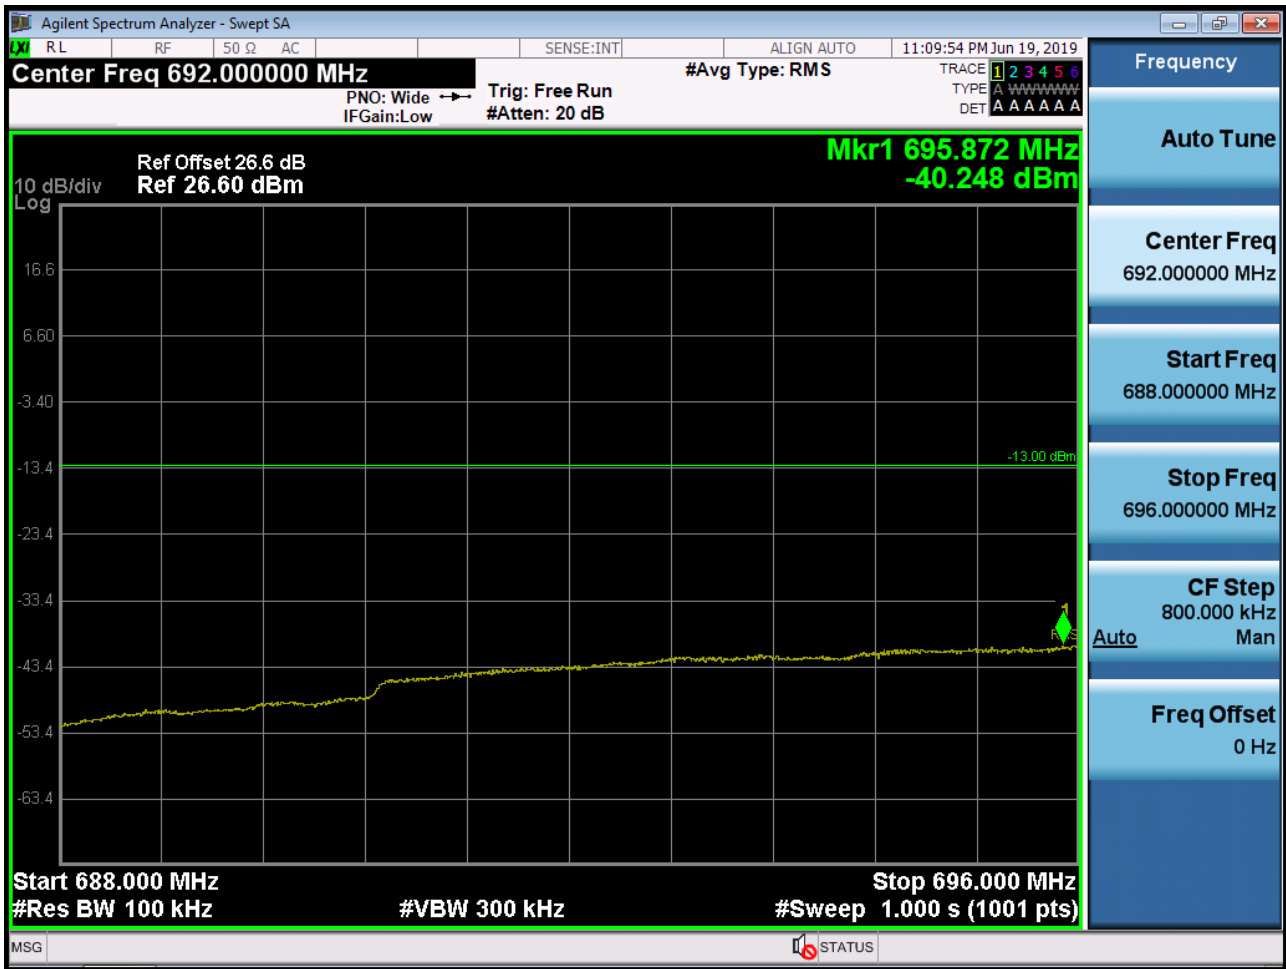

BAND 12. Upper Band Edge Plot (1.4M BW Ch.23173 QPSK\_RB1\_Offset 5)\_1



Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value +  $10 \cdot \log(30 \text{ kHz}/15 \text{ kHz}) \text{ dB} = -22.764 \text{ dBm} + 3.01 \text{ dB} = -19.664 \text{ dBm}$



### BAND 12. Upper Band Edge Plot (1.4M BW Ch.23173 QPSK\_RB1\_Offset 5)\_2



BAND 12. Upper Band Edge Plot (1.4M BW Ch.23173 QPSK\_RB1\_Offset 5)\_3



BAND 12. Upper Extended Band Edge Plot (1.4M BW Ch.23173 QPSK\_RB6\_0)



BAND 12. Upper Band Edge Plot (3M BW Ch.23165 QPSK\_RB1\_Offset 14)-1



BAND 12. Upper Band Edge Plot (3M BW Ch.23165 QPSK\_RB1\_Offset 14)-2



BAND 12. Upper Band Edge Plot (3M BW Ch.23165 QPSK\_RB15\_Offset 0)



BAND 12. Upper Extended Band Edge Plot (3M BW Ch.23165 QPSK\_RB15\_0)



BAND 12. Upper Band Edge Plot (5M BW Ch.23155 QPSK\_RB1\_Offset 24)





BAND 12. Upper Band Edge Plot (5M BW Ch.23155 QPSK\_RB25\_Offset 0)



BAND 12. Upper Extended Band Edge Plot (5M BW Ch.23155 QPSK\_RB25\_0)



BAND 12. Upper Band Edge Plot (10M BW Ch.23130 QPSK\_RB1\_Offset 49)




### BAND 12. Upper Band Edge Plot (10M BW Ch.23130 QPSK\_RB50\_Offset 0)




BAND 12. Upper Extended Band Edge Plot (10M BW Ch.23130 QPSK\_RB50\_0)




BAND 12. Conducted Spurious Plot \_ (23017ch\_1.4MHz\_QPSK\_RB 1\_0)

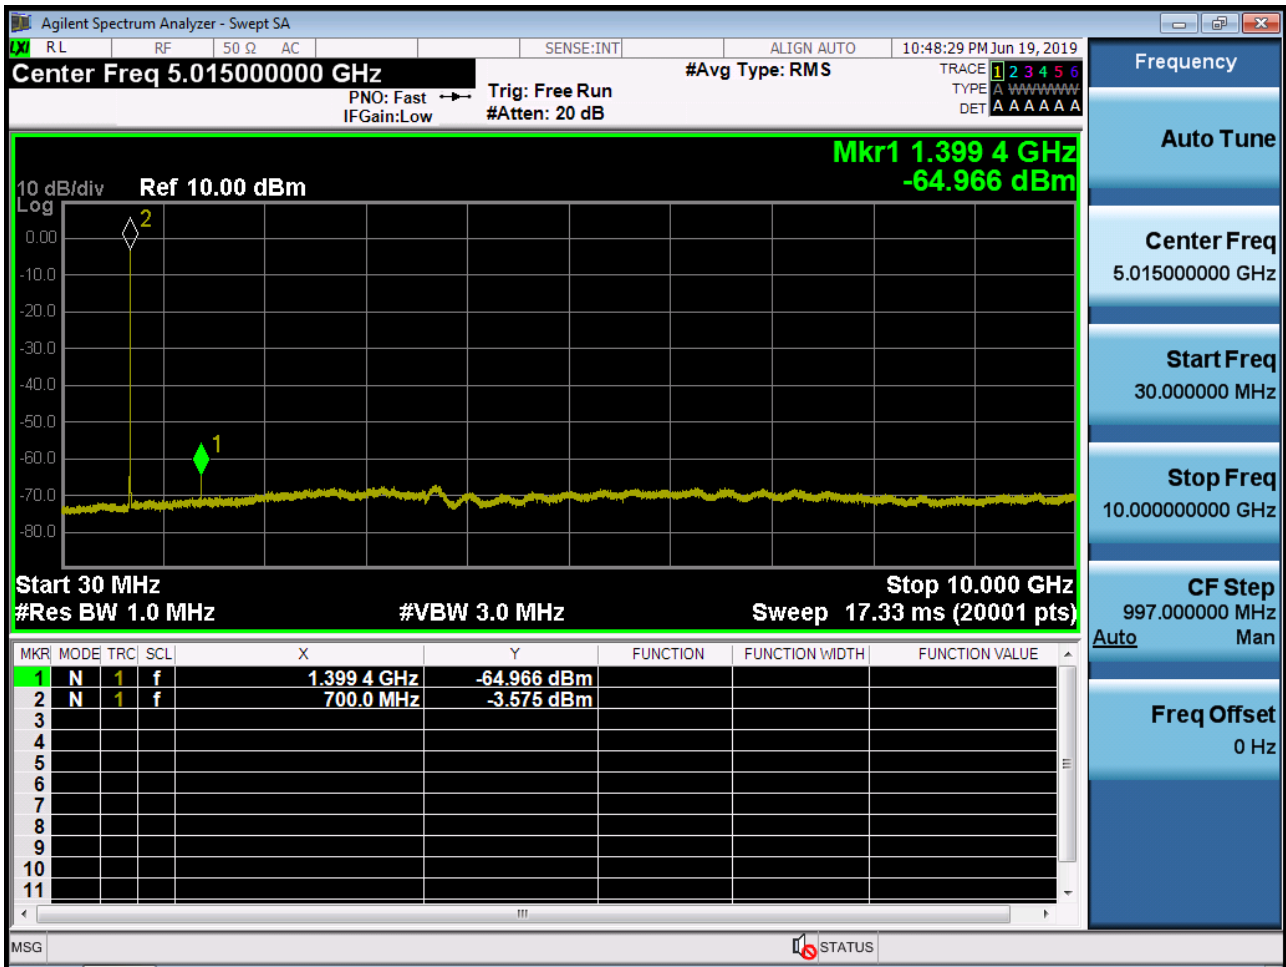

BAND 12. Conducted Spurious Plot \_ (23095ch\_1.4MHz\_QPSK\_RB 1\_0)

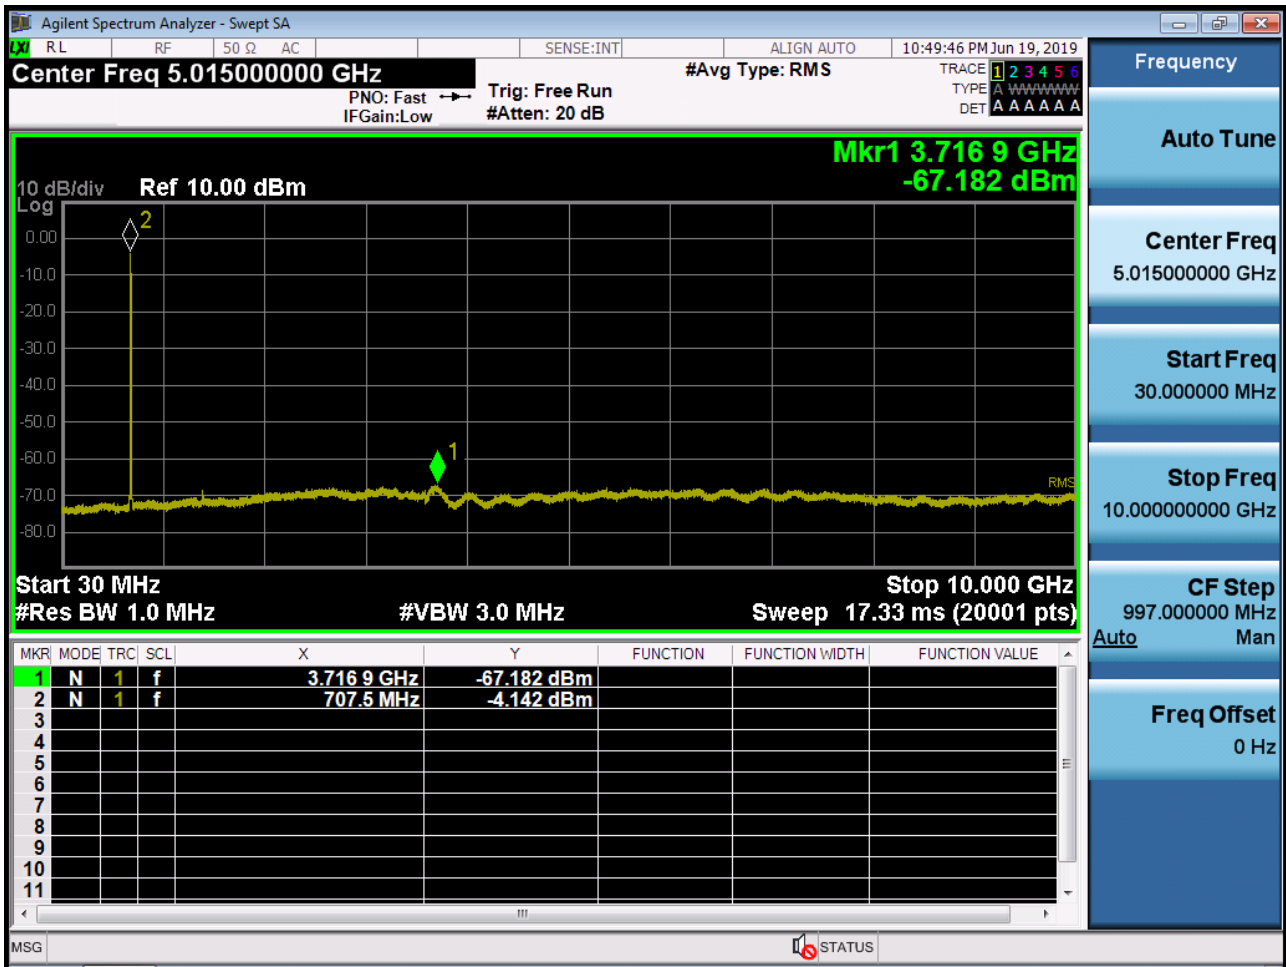


BAND 12. Conducted Spurious Plot \_ (23173ch\_1.4MHz\_QPSK\_RB 1\_0)

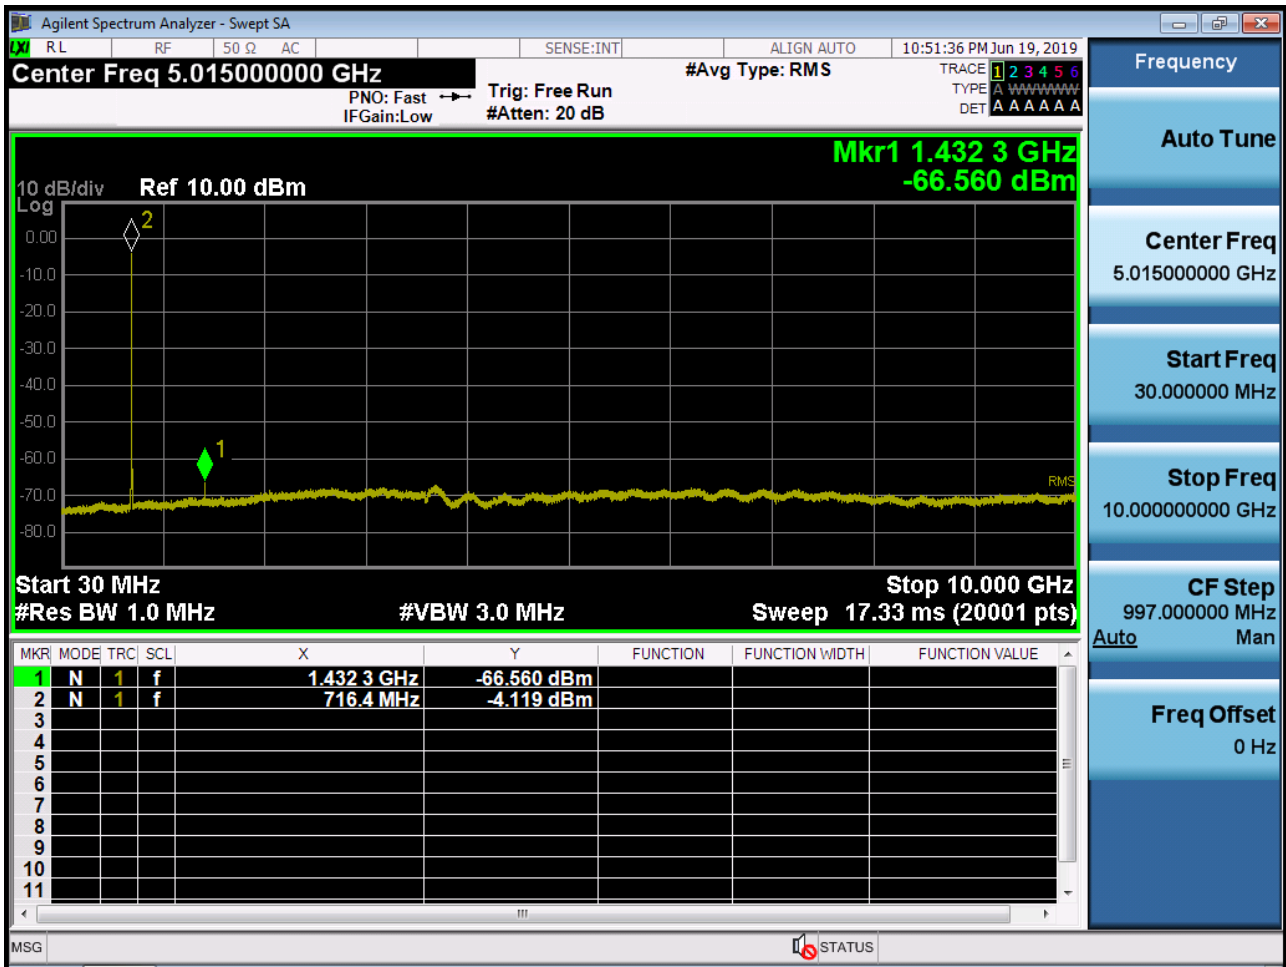





BAND 12. Conducted Spurious Plot \_ (23025ch\_3MHz\_QPSK\_RB 1\_0)

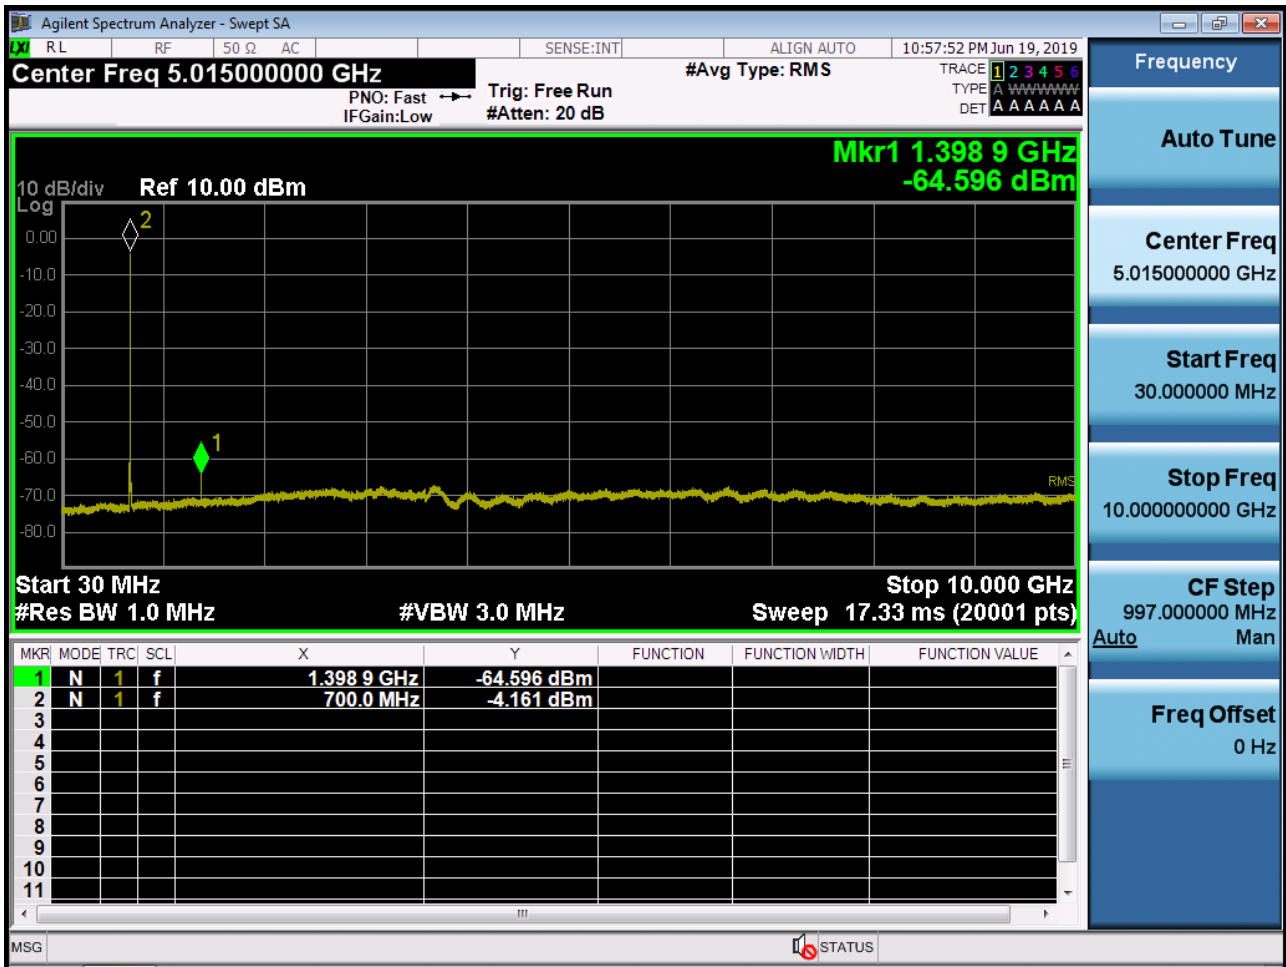


BAND 12. Conducted Spurious Plot \_ (23095ch\_3MHz\_QPSK\_RB 1\_0)

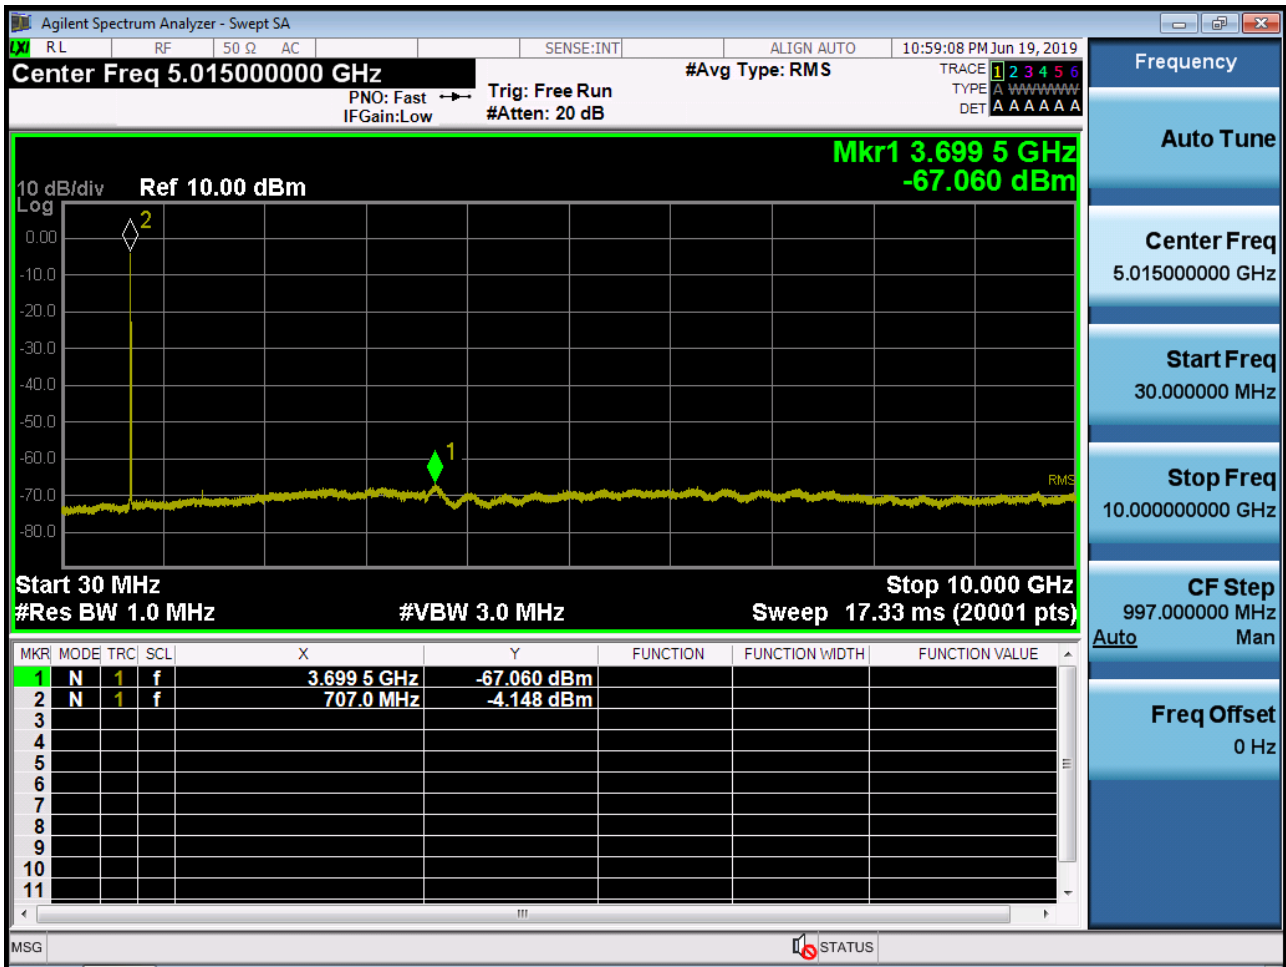


BAND 12. Conducted Spurious Plot \_ (23165ch\_3MHz\_QPSK\_RB 1\_0)

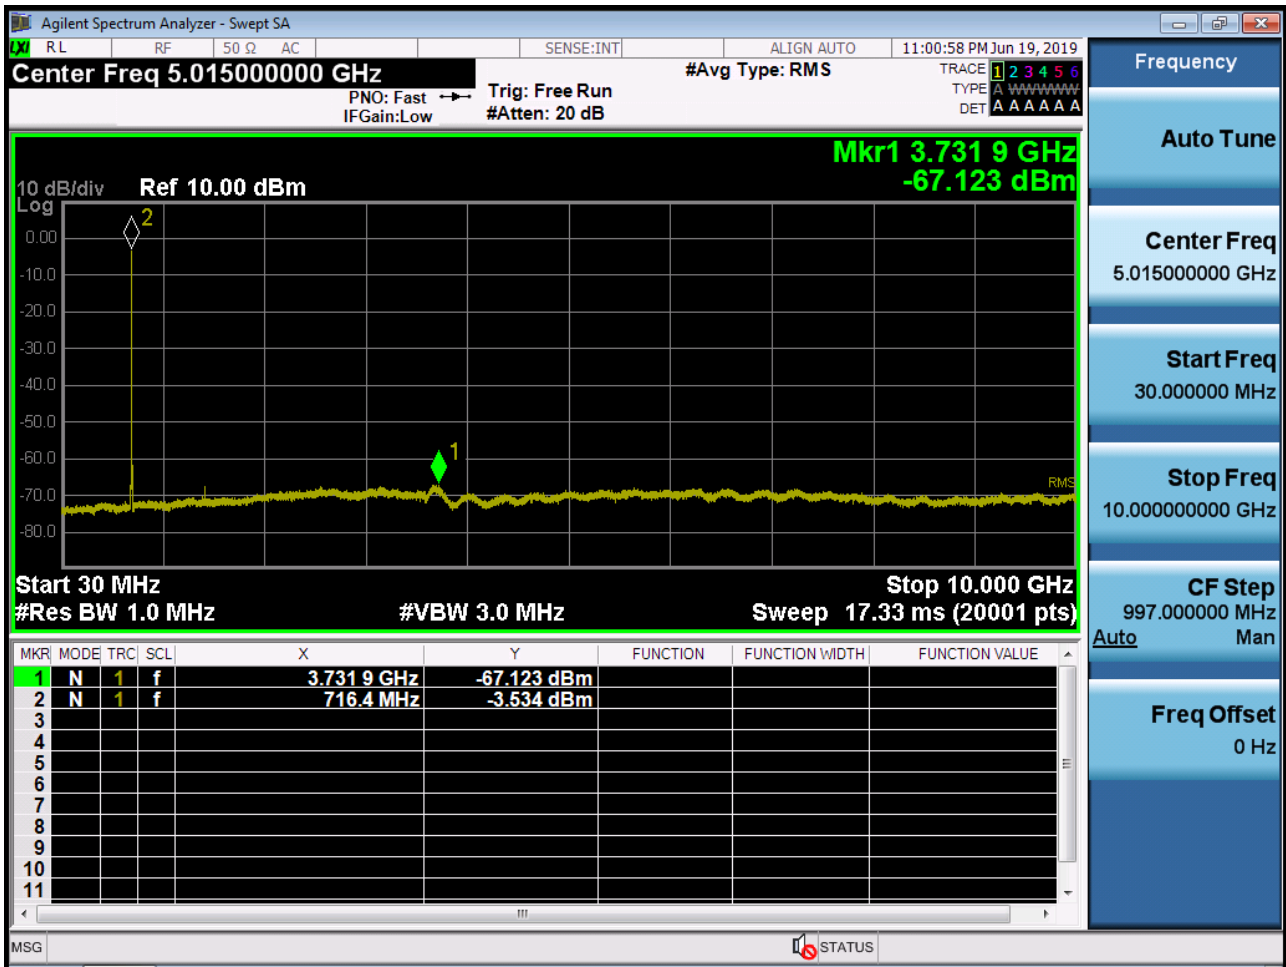


BAND 12. Conducted Spurious Plot \_ (23035ch\_5MHz\_QPSK\_RB 1\_0)

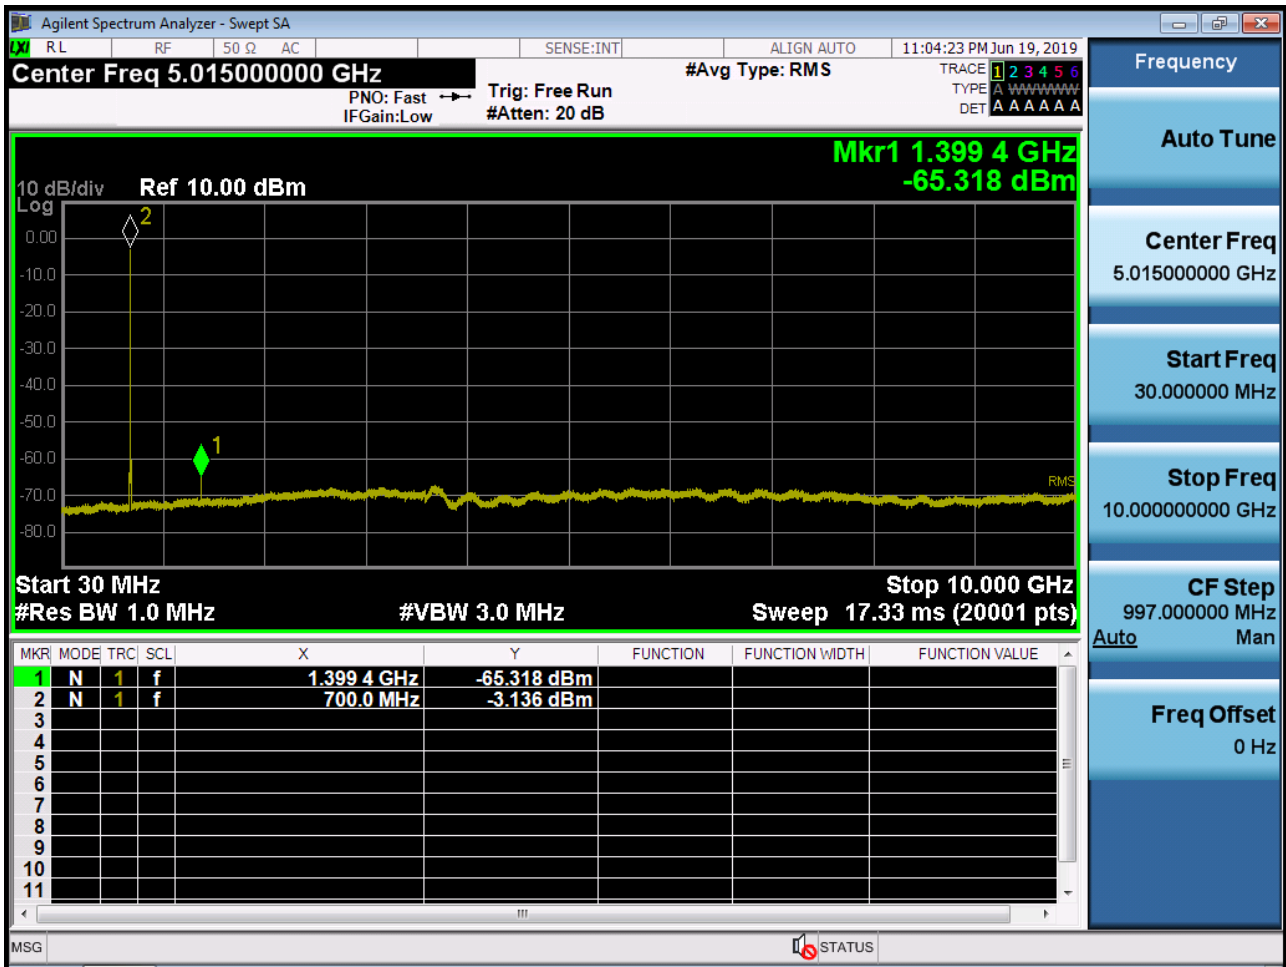


BAND 12. Conducted Spurious Plot \_ (23095ch\_5MHz\_QPSK\_RB 1\_0)

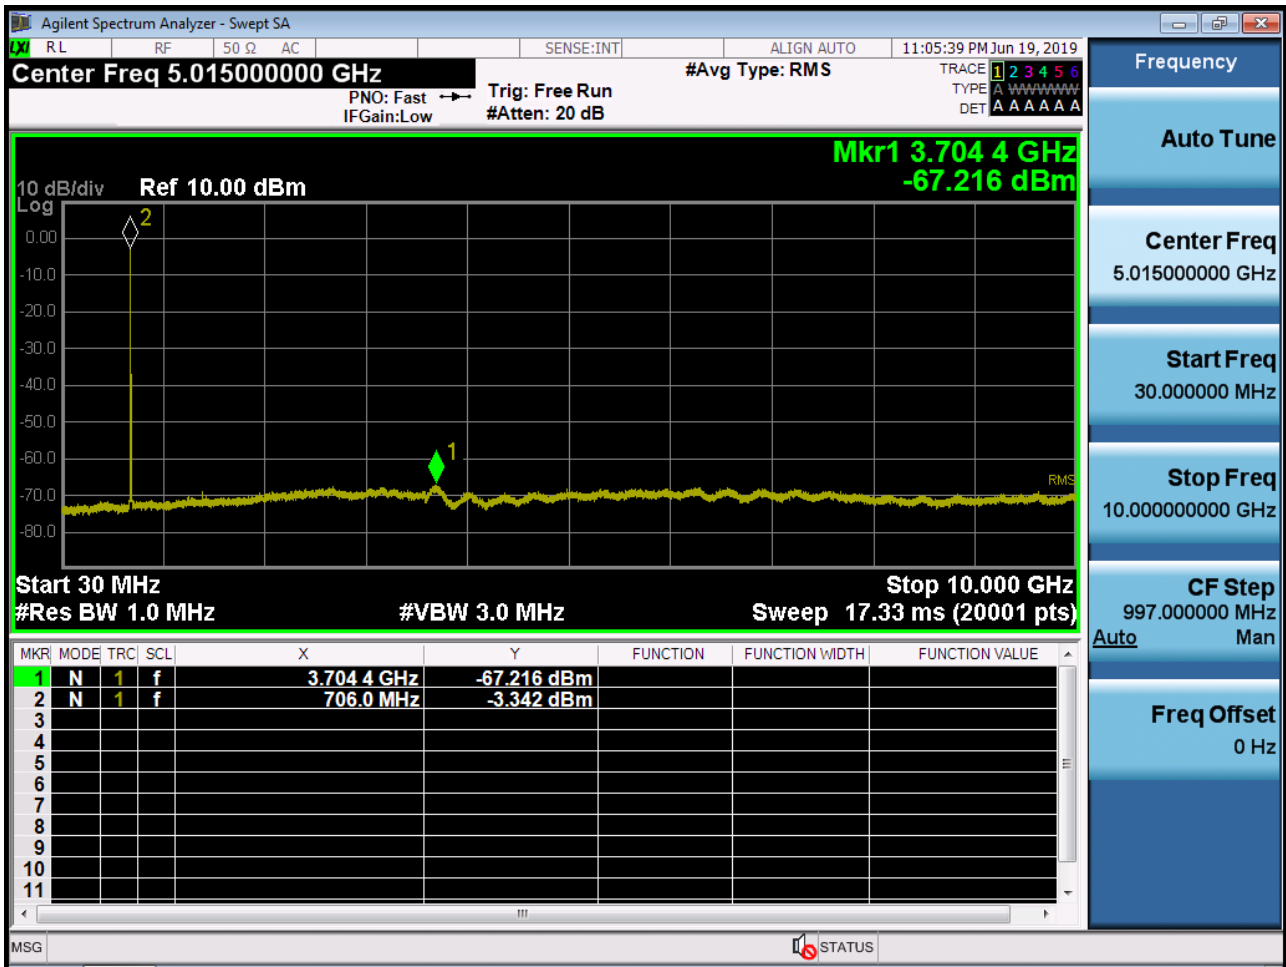


BAND 12. Conducted Spurious Plot \_ (23155ch\_5MHz\_QPSK\_RB 1\_0)

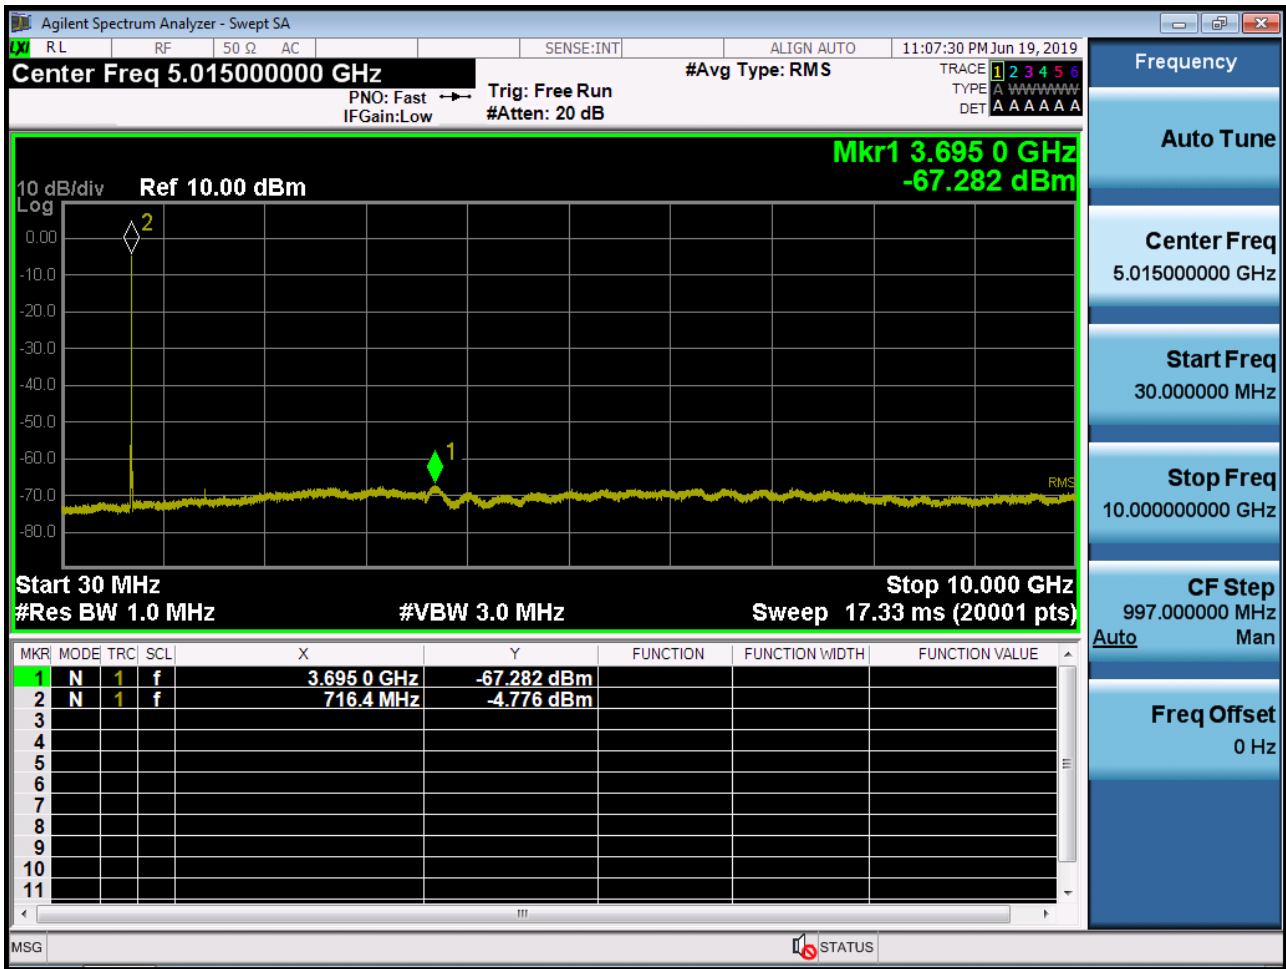

BAND 12. Conducted Spurious Plot \_ (23060ch\_10MHz\_QPSK\_RB 1\_0)

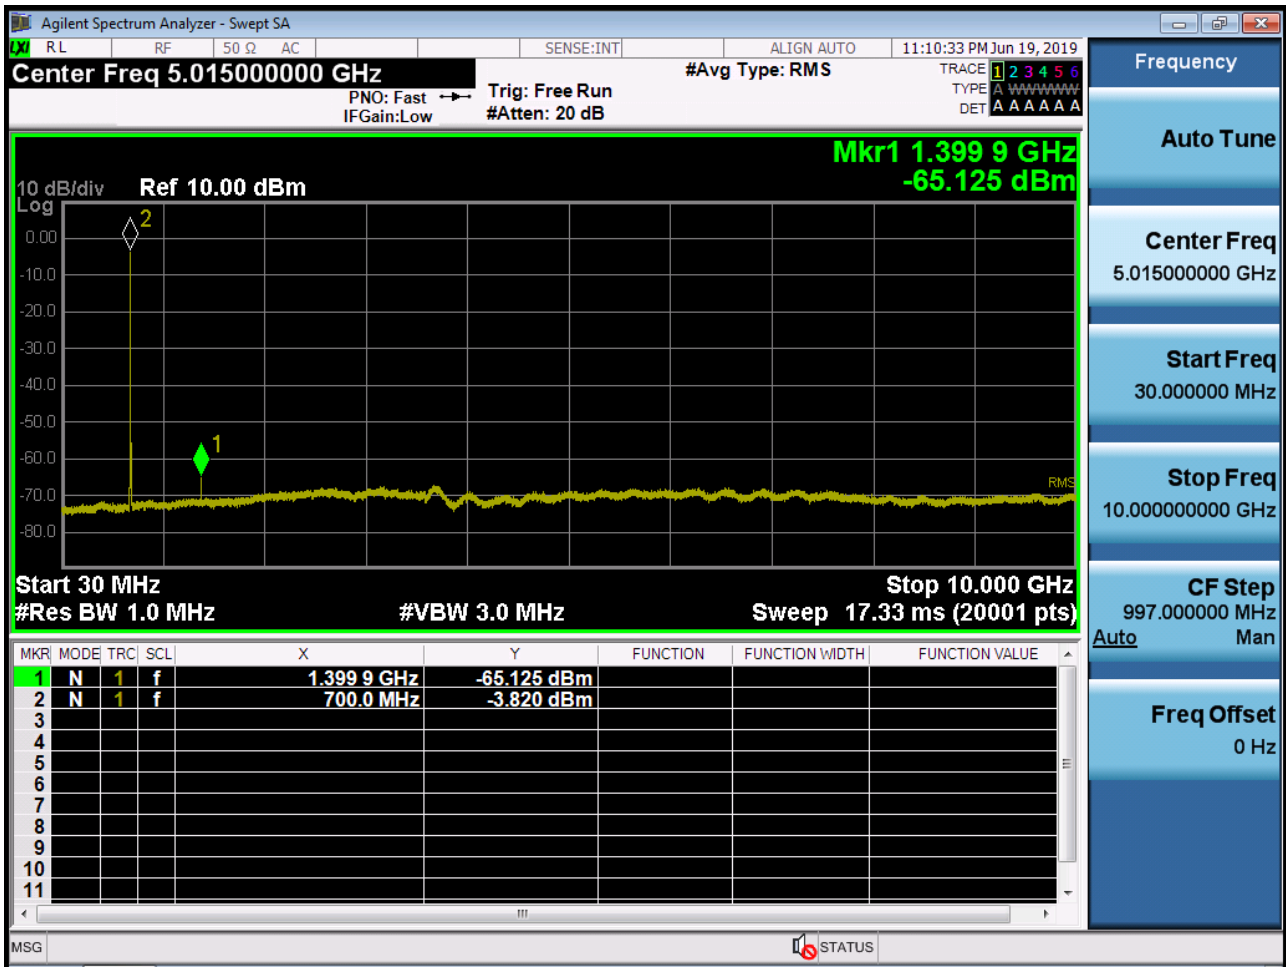


BAND 12. Conducted Spurious Plot \_ (23095ch\_10MHz\_QPSK\_RB 1\_0)

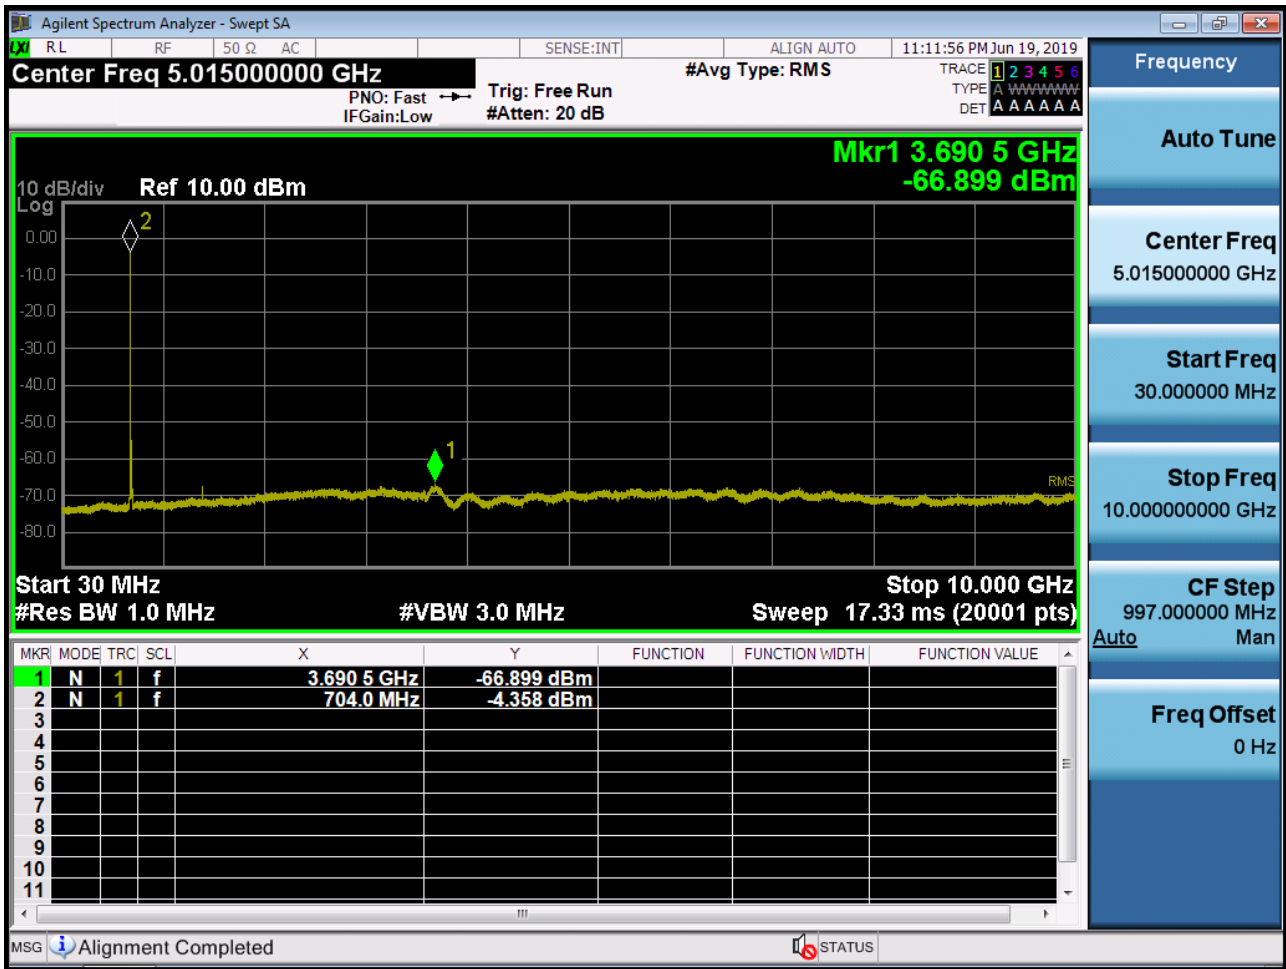



BAND 12. Conducted Spurious Plot \_ (23130ch\_10MHz\_QPSK\_RB 1\_0)

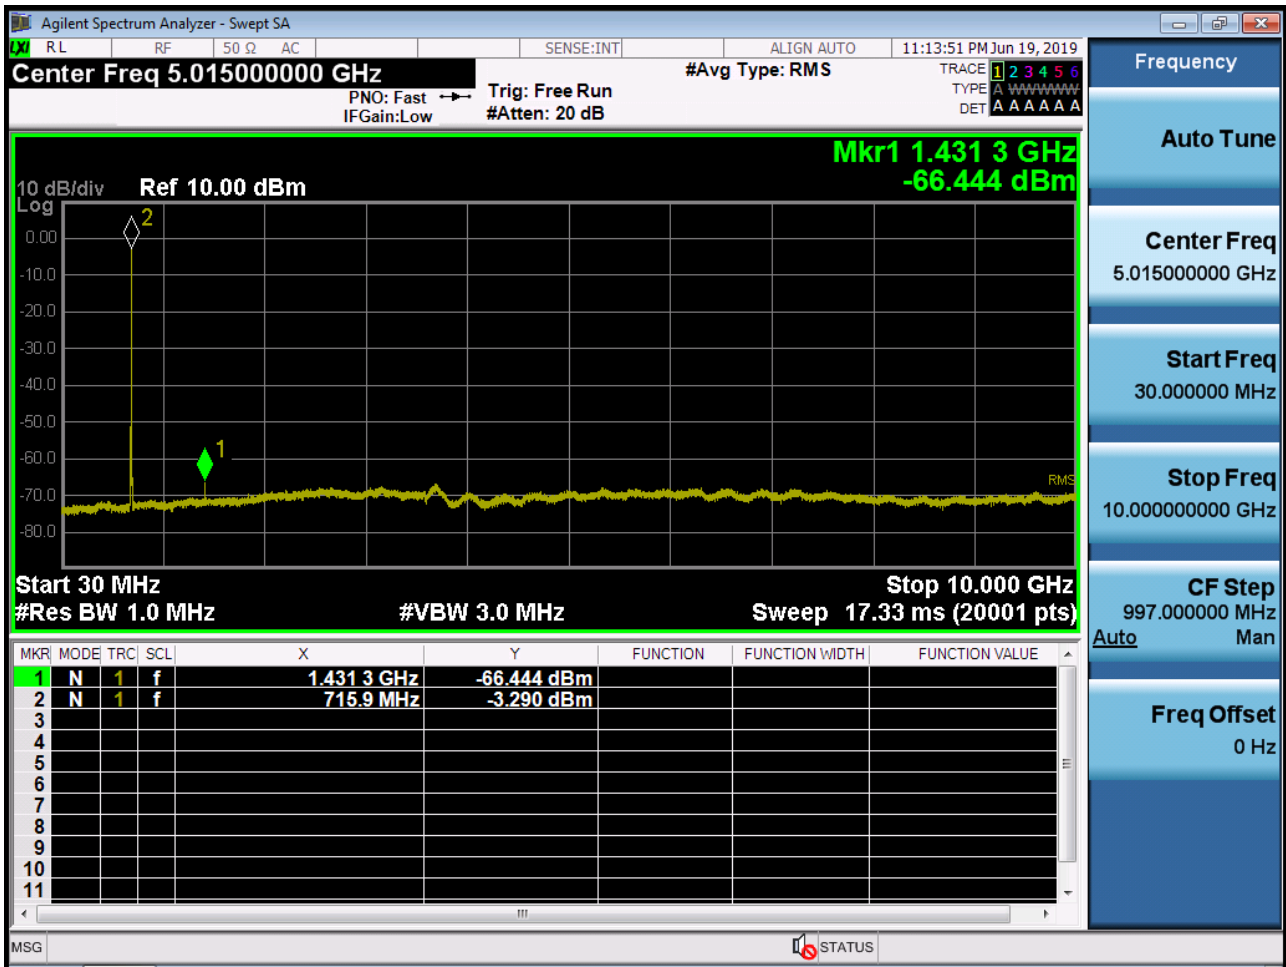

**10. ANNEX A\_ TEST SETUP PHOTO**

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1907-FI027-P

## 11. ANNEX B\_ EMI TEST RESULT

EMI test result is described in Annex B. Please refer to Annex B