

TEST REPORT

FCC/IC LTE Test for SM-R825U

Certification

APPLICANT

SAMSUNG Electronics Co., Ltd.

REPORT NO.

HCT-RF-1907-FI031

DATE OF ISSUE

July 29, 2019

HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 F ax. +82 31 645 6401



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401

<p>TEST REPORT</p> <p>FCC/IC LTE Test for SM-R825U</p>	REPORT NO. HCT-RF-1907-FI031
	DATE OF ISSUE July 29, 2019
	FCC ID/ IC A3LSMR825/649E-SMR825

Applicant	SAMSUNG Electronics Co., Ltd. 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
Eut Type	Smart Watch
Model Name	SM-R825U
Additional Model(s)	SM-R825F
Date of Receipt	June 13, 2019
FCC Rule Part(s)	§ 22, § 2
IC Rule(s)	RSS-Gen Issue5, RSS-132 Issue3
FCC Classification	PCS Licensed Transmitter (PCB)
Manufacturer	SAMSUNG Electronics Co., Ltd.

Tested by
Kwon Jeong

(signature)

Technical Manager
Jong Seok Lee

(signature)

HCT CO., LTD.

Soo Chan Lee
SooChan Lee / CEO

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	July 29, 2019	Initial Release

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

CONTENTS

1. GENERAL INFORMATION	5
1.1. MAXIMUM OUTPUT POWER	6
2. INTRODUCTION	7
2.1. DESCRIPTION OF EUT	7
2.2. MEASURING INSTRUMENT CALIBRATION	7
2.3. TEST FACILITY	7
3. DESCRIPTION OF TESTS	8
3.1 TEST PROCEDURE	8
3.2 RADIATED POWER	9
3.3 RADIATED SPURIOUS EMISSIONS	10
3.4 OCCUPIED BANDWIDTH.	11
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	12
3.6 BAND EDGE	13
3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	15
3.8 WORST CASE(RADIATED TEST)	16
3.9 WORST CASE(CONDUCTED TEST)	17
4. LIST OF TEST EQUIPMENT	18
5. MEASUREMENT UNCERTAINTY	19
6. SUMMARY OF TEST RESULTS	20
7. SAMPLE CALCULATION	21
8. TEST DATA	23
8.1 EFFECTIVE RADIATED POWER	23
8.3 RADIATED SPURIOUS EMISSIONS	26
8.3 OCCUPIED BANDWIDTH	31
8.4 CONDUCTED SPURIOUS EMISSIONS	32
8.5 BAND EDGE	32
8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	33
8.7 RECEIVER SPURIOUS EMISSIONS	38
9. TEST PLOTS	39
10. ANNEX A_ TEST SETUP PHOTO	95

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMR825
IC	649E-SMR825
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule Part(s):	§ 22, § 2
IC Rule(s):	RSS-Gen Issue5, RSS-132 Issue3
EUT Type:	Smart Watch
Model(s):	SM-R825U
Additional Model	SM-R825F
Tx Frequency:	824.7 MHz – 848.3 MHz (LTE – Band5 / 26 (1.4 MHz)) 825.5 MHz – 847.5 MHz (LTE – Band5 / 26 (3 MHz)) 826.5 MHz – 846.5 MHz (LTE – Band5 / 26 (5 MHz)) 829.0 MHz – 844.0 MHz (LTE – Band5 / 26 (10 MHz)) 831.5 MHz – 841.5 MHz (LTE – Band 26 (15 MHz))
Date(s) of Tests:	June 13, 2019~ July 26, 2019

1.1. MAXIMUM OUTPUT POWER

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band5/ 26 (1.4)	824.7 – 848.3	1M10G7D	QPSK	0.014	11.58
		1M10W7D	16QAM	0.008	8.83
LTE – Band5/ 26 (3)	825.5 – 847.5	2M72G7D	QPSK	0.015	11.65
		2M71W7D	16QAM	0.008	9.18
LTE – Band5/ 26 (5)	826.5 – 846.5	4M51G7D	QPSK	0.014	11.45
		4M52W7D	16QAM	0.008	8.90
LTE – Band5/ 26 (10)	829.0 – 844.0	9M04G7D	QPSK	0.016	12.08
		9M00W7D	16QAM	0.009	9.47
LTE – BAND5/ 26 (15)	831.5 – 841.5	13M5G7D	QPSK	0.016	11.91
		13M5W7D	16QAM	0.009	9.61

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Smart Watch with UMTS and LTE.

It also supports IEEE 802.11 b/g/n (HT20), Bluetooth, BT LE.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.
These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.


Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $>$ 2 x span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin $>$ 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data

3.4 OCCUPIED BANDWIDTH.

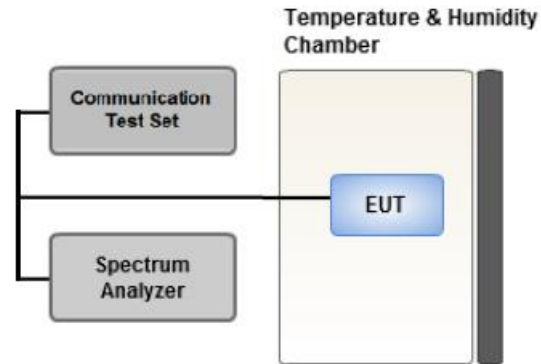

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

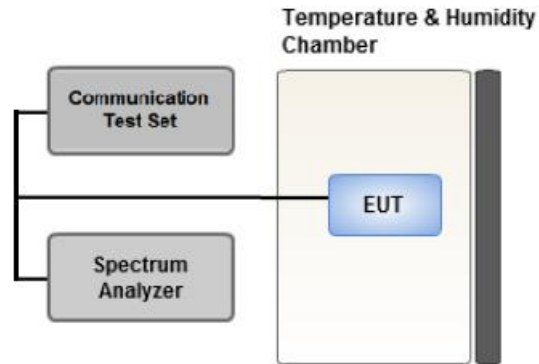

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 * Span / RBW

3.6 BAND EDGE

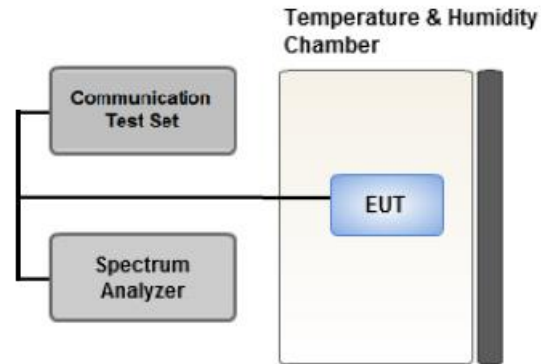

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

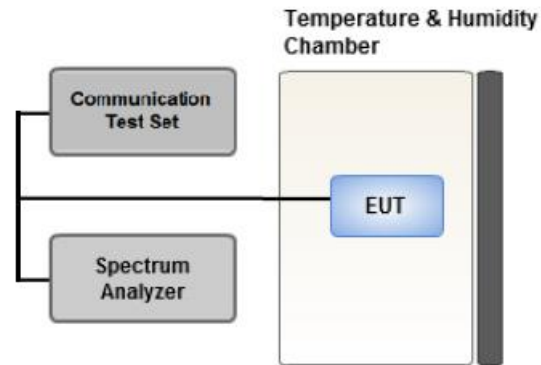

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

.- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.

.- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.8 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- LTE Band 26(1.4M/3M/5M/10M) overlaps the entire frequency range of LTE Band 5(1.4M/3M/5M/10M) and they have the same Tune-up power.
Therefore, test data provided in this report covers Band 5 as well as Band 26.
- SM-R825U & additional model were tested and the worst case results are reported.
(Worst case : SM-R825U)
- All modes of operation were tested and the worst case results are reported.
Mode : Stand alone, Stand alone+ wireless charging dock
Worst case : Stand alone+ wireless charging dock

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	QPSK, 16QAM	1	0	X
Radiated Spurious and Harmonic Emissions	QPSK	1	0	X

3.9 WORST CASE(CONDUCTED TEST)

- Worst case : Of all modulation, We have tested modulation of the high Conducted Output Power.

Conducted Output Power value can be confirmed on the SAR report.

- LTE Band 26(1.4M/3M/5M/10M) overlaps the entire frequency range of LTE Band 5(1.4M/3M/5M/10M) and they have the same Tune-up power.

Therefore, test data provided in this report covers Band 5 as well as Band 26.

- SM-R825U & additional model were tested and the worst case results are reported.

(Worst case : SM-R825U)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM	1.4, 3, 5, 10, 15	Mid	Full RB	0
Band Edge	* QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		1.4, 3, 5, 10, 15	Low, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	* QPSK	1.4, 3, 5, 10, 15	Low, Mid, High	1	0

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibration Interval	Calibration Due
REOHDE & SCHWARZ	SCU 18 / AMPLIFIER	10094	04/16/2019	Annual	04/16/2020
Wainwright	WHK1.2/15G-10EF/H.P.F	4	04/02/2019	Annual	04/02/2020
Wainwright	WHK3.3/18G-10EF/H.P.F	2	04/02/2019	Annual	04/02/2020
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	11275	05/03/2019	Annual	05/03/2020
Agilent	E3632A/DC Power Supply	MY50360067	10/17/2018	Annual	10/17/2019
Schwarzbeck	UHAP/ Dipole Antenna	557	03/29/2019	Biennial	03/29/2021
Schwarzbeck	UHAP/ Dipole Antenna	558	03/29/2019	Biennial	03/29/2021
ESPEC	SU-642 / Chamber	93000718	08/07/2018	Annual	08/07/2019
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	09/14/2018	Annual	09/14/2019
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	10/04/2018	Annual	10/04/2019
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/29/2019	Biennial	04/29/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	01/28/2019	Biennial	01/28/2021
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY51110063	05/08/2019	Annual	05/08/2020
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/04/2019	Annual	06/04/2020
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/22/2018	Annual	10/22/2019
Agilent	8960 (E5515C)/ Base Station	MY48360800	09/27/2018	Annual	09/27/2019
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	08/23/2018	Biennial	08/23/2020
Schwarzbeck	VULB9160/ Bilog Antenna	9160-3368	08/09/2018	Biennial	08/09/2020
Schwarzbeck	VULB9160/ Hybrid Antenna	760	03/22/2019	Biennial	03/22/2021
Anritsu Corp.	MT8821C/Wideband Radio Communication Tester	6201502997	08/13/2018	Annual	08/13/2019
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	01/30/2019	Annual	01/30/2020
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	114415	10/01/2018	Annual	10/01/2019
REOHDE & SCHWARZ	ESU40 / EMI TEST RECEIVER	100524	07/27/2018	Annual	07/27/2019
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	IC Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	RSS Gen(6.7)	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 22.917(a)	RSS 132(5.5)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§ 2.1046	-	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§ 2.1055, § 22.355	RSS 132(5.3)	< 2.5 ppm	PASS

Note:

1. See SAR Report
2. The same samples were used for SAR and EMC

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	IC Section(s)	Test Limit	Test Result
Effective Radiated Power	§ 22.913(a)(5)	RSS 132(5.4)	< 7 Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 22.917(a)	RSS 132(5.5)	< 43 + 10log10 (P[Watts]) for all out-of-band emissions	PASS
Receiver Spurious Emissions	N/A	RSS Gen(7)	Section 8.7	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW
GSM BW = 249 kHz
G = Phase Modulation
X = Cases not otherwise covered
W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W
GSM BW = 249 kHz
G = Phase Modulation
7 = Quantized/Digital Info
W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W
WCDMA BW = 4.17 MHz
F = Frequency Modulation
9 = Composite Digital Info
W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D
LTE BW = 4.48 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

16QAM Modulation

Emission Designator = 4M48W7D
LTE BW = 4.48 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

64QAM Modulation

Emission Designator = 4M48W7D
LTE BW = 4.48 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EFFECTIVE RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
824.7	LTE B5/ 26 (1.4 MHz)	QPSK	-38.68	22.70	-10.26	0.86	H	< 7.00	0.014	11.58
		16-QAM	-41.43	19.95	-10.26	0.86	H		0.008	8.83
836.5		QPSK	-41.13	21.15	-10.21	0.87	H		0.010	10.07
		16-QAM	-43.51	18.77	-10.21	0.87	H		0.006	7.69
848.3		QPSK	-42.32	20.13	-10.16	0.87	H		0.008	9.10
		16-QAM	-44.64	17.81	-10.16	0.87	H		0.005	6.78

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
825.5	LTE B5/ 26 (3 MHz)	QPSK	-38.62	22.77	-10.26	0.86	H	< 7.00	0.015	11.65
		16-QAM	-41.09	20.30	-10.26	0.86	H		0.008	9.18
836.5		QPSK	-40.95	21.33	-10.21	0.87	H		0.011	10.25
		16-QAM	-43.22	19.06	-10.21	0.87	H		0.006	7.98
847.5		QPSK	-41.75	20.64	-10.17	0.87	H		0.009	9.61
		16-QAM	-44.20	18.19	-10.17	0.87	H		0.005	7.16

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
826.5	LTE B5/ 26 (5 MHz)	QPSK	-38.90	22.56	-10.26	0.86	H	< 7.00	0.014	11.45
		16-QAM	-41.45	20.01	-10.26	0.86	H		0.008	8.90
836.5		QPSK	-41.23	21.05	-10.21	0.87	H		0.010	9.97
		16-QAM	-43.45	18.83	-10.21	0.87	H		0.006	7.75
846.5		QPSK	-41.51	20.81	-10.17	0.87	H		0.009	9.77
		16-QAM	-44.08	18.24	-10.17	0.87	H		0.005	7.20

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
829.0	LTE B5/ 26 (10 MHz)	QPSK	-38.55	23.18	-10.24	0.86	H	< 7.00	0.016	12.08
		16-QAM	-41.16	20.57	-10.24	0.86	H		0.009	9.47
836.5		QPSK	-40.32	21.96	-10.21	0.87	H		0.012	10.88
		16-QAM	-42.34	19.94	-10.21	0.87	H		0.008	8.86
844.0		QPSK	-41.33	20.92	-10.18	0.87	H		0.010	9.87
		16-QAM	-43.86	18.39	-10.18	0.87	H		0.005	7.34

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
831.5	LTE B26 (15 MHz)	QPSK	-38.93	23.00	-10.23	0.86	H	< 7.00	0.016	11.91
		16-QAM	-41.23	20.70	-10.23	0.86	H		0.009	9.61
836.5		QPSK	-39.58	22.70	-10.21	0.87	H		0.015	11.62
		16-QAM	-41.96	20.32	-10.21	0.87	H		0.008	9.24
841.5		QPSK	-40.54	21.82	-10.19	0.87	H		0.012	10.76
		16-QAM	-43.00	19.36	-10.19	0.87	H		0.007	8.30

8.3 RADIATED SPURIOUS EMISSIONS

- ▣ OPERATING FREQUENCY: 824.7 MHz
- ▣ MEASURED OUTPUT POWER: 11.58 dBm = 0.014 W
- ▣ MOD: LTE B5/ 26
- ▣ MODULATION SIGNAL: 1.4 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10}(W) =$ 24.58 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
26797 (824.7)	1,649.40	-43.51	7.46	-52.40	1.27	H	-48.36	59.93
	2,474.10	-53.99	8.68	-60.15	1.59	H	-55.21	66.79
	3,298.80	-58.94	10.30	-64.99	1.86	H	-58.70	70.28
26915 (836.5)	1,673.00	-44.60	7.53	-53.59	1.28	H	-49.49	61.06
	2,509.50	-55.44	8.83	-61.76	1.62	V	-56.70	68.28
	3,346.00	-58.32	10.51	-64.64	1.91	V	-58.19	69.76
27033 (848.3)	1,696.60	-45.46	7.71	-54.48	1.29	H	-50.21	61.78
	2,544.90	-58.93	8.86	-64.96	1.62	H	-59.87	71.45
	3,393.20	-58.80	10.57	-64.93	1.95	V	-58.46	70.04
	4,241.50	-54.12	10.78	-57.75	2.21	V	-51.33	62.90

- ▣ OPERATING FREQUENCY: 825.5 MHz
- ▣ MEASURED OUTPUT POWER: 11.65 dBm = 0.015 W
- ▣ MOD: LTE B5/ 26
- ▣ MODULATION SIGNAL: 3 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10} (W) =$ 24.65 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
26805 (825.5)	1,651.00	-44.13	7.46	-53.02	1.27	H	-48.98	60.63
	2,476.50	-53.94	8.68	-60.10	1.59	H	-55.16	66.81
	3,302.00	-58.55	10.30	-64.60	1.86	V	-58.31	69.96
26915 (836.5)	1,673.00	-45.79	7.53	-54.78	1.28	H	-50.68	62.33
	2,509.50	-59.28	8.83	-65.60	1.62	V	-60.54	72.20
	3,346.00	-57.41	10.51	-63.73	1.91	V	-57.28	68.93
	4,182.50	-54.36	10.78	-58.13	2.17	V	-51.67	63.33
27025 (847.5)	1,695.00	-45.96	7.71	-54.98	1.29	H	-50.71	62.36
	2,542.50	-60.00	8.85	-65.78	1.61	V	-60.69	72.35
	3,390.00	-58.18	10.56	-64.44	1.95	H	-57.98	69.63

- ▣ OPERATING FREQUENCY: 826.5 MHz
- ▣ MEASURED OUTPUT POWER: 11.45 dBm = 0.014 W
- ▣ MOD: LTE B5/ 26
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10} (W) =$ 24.45 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
26815 (826.5)	1,653.00	-40.01	7.46	-48.90	1.27	H	-44.86	56.30
	2,479.50	-53.18	8.71	-59.55	1.60	V	-54.59	66.03
	3,306.00	-57.66	10.32	-63.68	1.87	H	-57.38	68.83
26915 (836.5)	1,673.00	-41.23	7.53	-50.22	1.28	H	-46.12	57.56
	2,509.50	-58.99	8.83	-65.31	1.62	V	-60.25	71.70
	3,346.00	-57.96	10.51	-64.28	1.91	H	-57.83	69.28
27015 (846.5)	1,693.00	-40.34	7.71	-49.36	1.29	H	-45.09	56.53
	2,539.50	-57.09	8.85	-62.87	1.61	V	-57.78	69.23
	3,386.00	-58.15	10.56	-64.43	1.93	H	-57.95	69.40

- ▣ OPERATING FREQUENCY: 829.0 MHz
- ▣ MEASURED OUTPUT POWER: 12.08 dBm = 0.016 W
- ▣ MOD: LTE B5/ 26
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10}(W) =$ 25.08 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
26840 (829.0)	1658.00	-44.98	7.50	-54.04	1.27	H	-49.96	62.03
	2487.00	-57.97	8.77	-64.04	1.60	V	-59.02	71.10
	3316.00	-57.73	10.35	-63.84	1.88	H	-57.52	69.60
26915 (836.5)	1673.00	-47.77	7.53	-56.76	1.28	H	-52.66	64.74
	2509.50	-57.97	8.83	-64.29	1.62	V	-59.23	71.31
	3346.00	-58.13	10.51	-64.45	1.91	H	-58.00	70.08
26990 (844.0)	1688.00	-38.70	7.67	-47.73	1.28	H	-43.49	55.57
	2532.00	-52.35	8.85	-58.71	1.61	H	-53.62	65.70
	3376.00	-57.33	10.56	-63.68	1.89	V	-57.16	69.24
	4220.00	-51.76	10.81	-55.66	2.22	V	-49.22	61.30

- ▣ OPERATING FREQUENCY: 831.5 MHz
- ▣ MEASURED OUTPUT POWER: 11.91 dBm = 0.016 W
- ▣ MOD: LTE B26
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10}(W) =$ 24.91 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
26865 (831.5)	1663.00	-42.17	7.50	-51.23	1.27	H	-47.15	59.22
	2494.50	-58.55	8.80	-64.79	1.60	H	-59.74	71.82
	3326.00	-56.98	10.39	-63.11	1.92	V	-56.79	68.87
26915 (836.5)	1673.00	-44.72	7.53	-53.71	1.28	H	-49.61	61.69
	2509.50	-58.73	8.83	-65.05	1.62	H	-59.99	72.07
	3346.00	-58.03	10.51	-64.35	1.91	V	-57.90	69.98
26965 (841.5)	1683.00	-42.52	7.60	-51.56	1.28	H	-47.39	59.46
	2524.50	-57.25	8.85	-63.50	1.61	V	-58.42	70.50
	3366.00	-58.06	10.55	-64.49	1.88	V	-57.97	70.05
	4207.50	-53.30	10.81	-57.13	2.21	H	-50.68	62.76

8.3 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
5/ 26	1.4 MHz	836.5	QPSK	6	0	1.0956
			16-QAM			1.0986
	3 MHz		QPSK	15		2.7182
			16-QAM			2.7138
	5 MHz		QPSK	25		4.5134
			16-QAM			4.5244
	10 MHz		QPSK	50		9.0377
			16-QAM			9.0042
26	15 MHz	QPSK	75	13.503		
		16-QAM		13.484		

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 40 ~ 49.

8.4 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
5/ 26	1.4	824.7	3.7084	27.976	-67.008	-39.032	-13.00
		836.5	4.1810	27.976	-67.270	-39.294	
		848.3	3.7054	27.976	-67.282	-39.306	
	3	825.5	3.7179	27.976	-67.334	-39.358	
		836.5	3.6790	27.976	-67.441	-39.465	
		847.5	4.2443	27.976	-65.981	-38.005	
	5	826.5	4.1222	27.976	-67.279	-39.303	
		836.5	3.6995	27.976	-67.258	-39.282	
		846.5	4.2438	27.976	-66.711	-38.735	
	10	829.0	3.6925	27.976	-67.076	-39.100	
		836.5	3.7099	27.976	-67.178	-39.202	
		844.0	4.2428	27.976	-66.096	-38.120	
26	15	831.5	3.7005	27.976	-67.051	-39.075	
		836.5	3.7099	27.976	-67.148	-39.172	
		841.5	4.2413	27.976	-67.151	-39.175	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 80 ~ 94.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131


8.5 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 50 ~ 79.

8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE B5/ 26
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 26915 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	836 500 002	0.0	0.000 000	0.000
100%		-30	836 500 004	1.7	0.000 000	0.002
100%		-20	836 500 004	1.6	0.000 000	0.002
100%		-10	836 500 006	4.0	0.000 000	0.005
100%		0	836 500 005	3.0	0.000 000	0.004
100%		+10	836 500 000	-2.6	0.000 000	-0.003
100%		+30	836 500 000	-2.8	0.000 000	-0.003
100%		+40	836 500 006	3.5	0.000 000	0.004
100%		+50	836 500 005	2.8	0.000 000	0.003
Batt. Endpoint		3.500	+20	836 500 001	-1.6	0.000 000

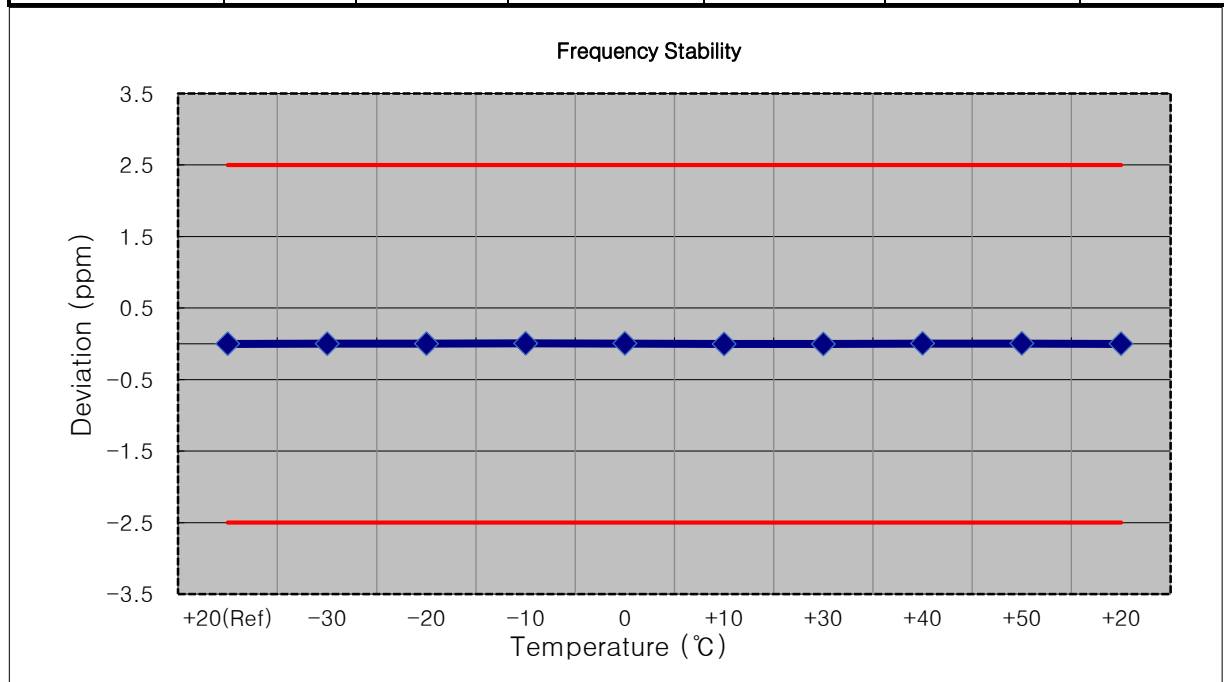


- ▣ MODE: LTE B5/ 26
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 26915 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	836 500 002	0.0	0.000 000	0.000
100%		-30	836 500 005	3.0	0.000 000	0.004
100%		-20	836 500 007	4.7	0.000 001	0.006
100%		-10	836 500 005	3.0	0.000 000	0.004
100%		0	836 500 006	3.8	0.000 000	0.005
100%		+10	836 500 000	-2.3	0.000 000	-0.003
100%		+30	836 500 004	1.9	0.000 000	0.002
100%		+40	836 500 000	-2.8	0.000 000	-0.003
100%		+50	836 500 005	2.9	0.000 000	0.003
Batt. Endpoint		3.500	+20	836 500 006	3.4	0.000 000

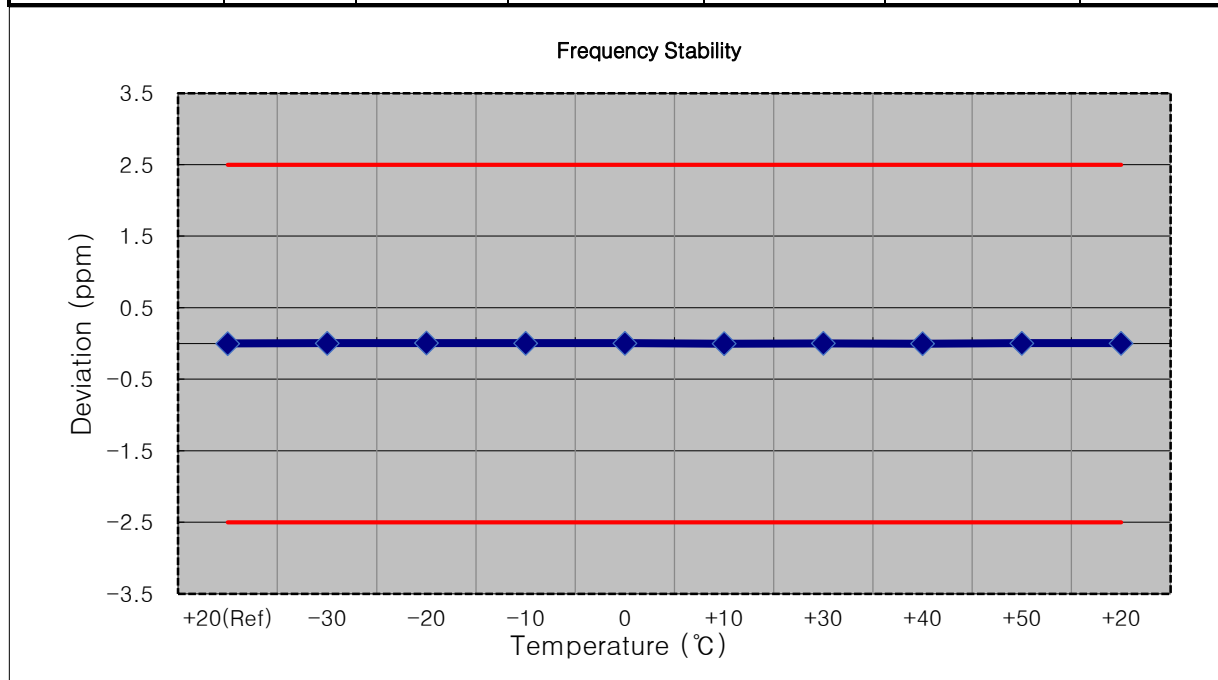


- ▣ MODE: LTE B5/ 26
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 26915 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	836 499 997	0.0	0.000 000	0.000
100%		-30	836 500 002	4.5	0.000 001	0.005
100%		-20	836 500 000	2.3	0.000 000	0.003
100%		-10	836 500 000	2.7	0.000 000	0.003
100%		0	836 499 999	2.1	0.000 000	0.003
100%		+10	836 499 995	-2.5	0.000 000	-0.003
100%		+30	836 500 002	4.9	0.000 001	0.006
100%		+40	836 499 999	2.1	0.000 000	0.003
100%		+50	836 499 995	-2.6	0.000 000	-0.003
Batt. Endpoint	3.500	+20	836 499 996	-1.8	0.000 000	-0.002

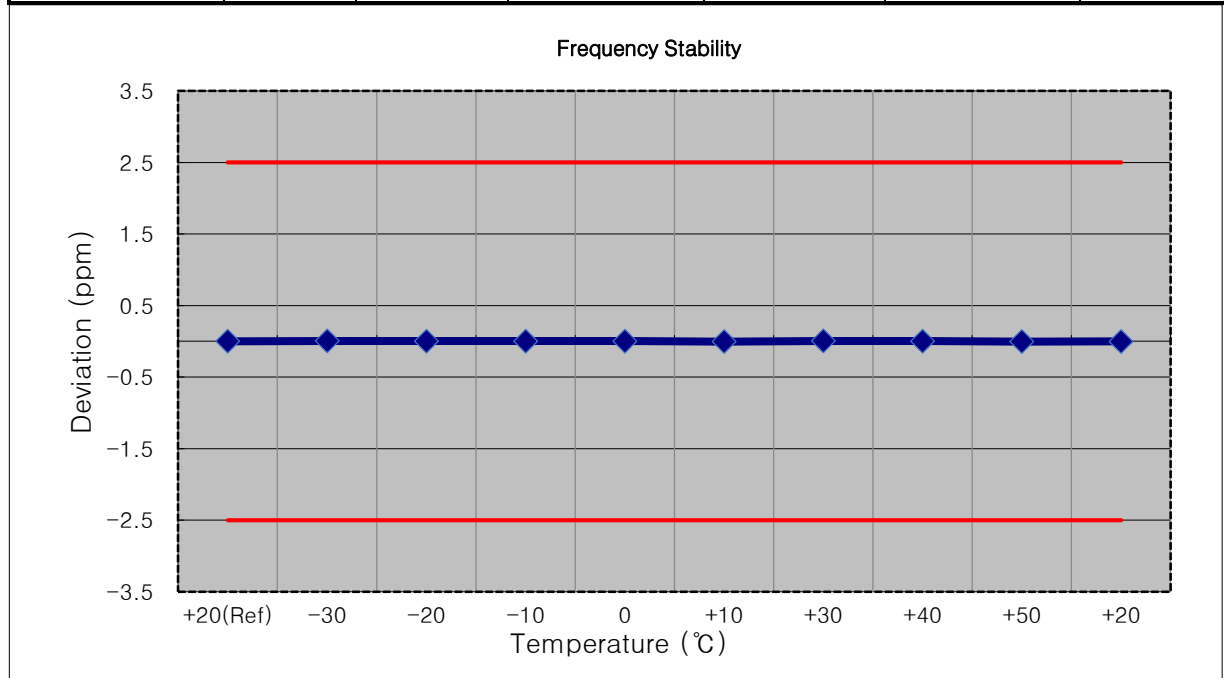


- ▣ MODE: LTE B5/ 26
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 26915 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	836 499 997	0.0	0.000 000	0.000
100%		-30	836 499 998	1.7	0.000 000	0.002
100%		-20	836 499 999	2.2	0.000 000	0.003
100%		-10	836 500 000	3.5	0.000 000	0.004
100%		0	836 499 999	1.8	0.000 000	0.002
100%		+10	836 499 999	2.0	0.000 000	0.002
100%		+30	836 500 000	2.9	0.000 000	0.003
100%		+40	836 499 999	2.0	0.000 000	0.002
100%		+50	836 499 999	2.4	0.000 000	0.003
Batt. Endpoint	3.500	+20	836 499 999	2.2	0.000 000	0.003

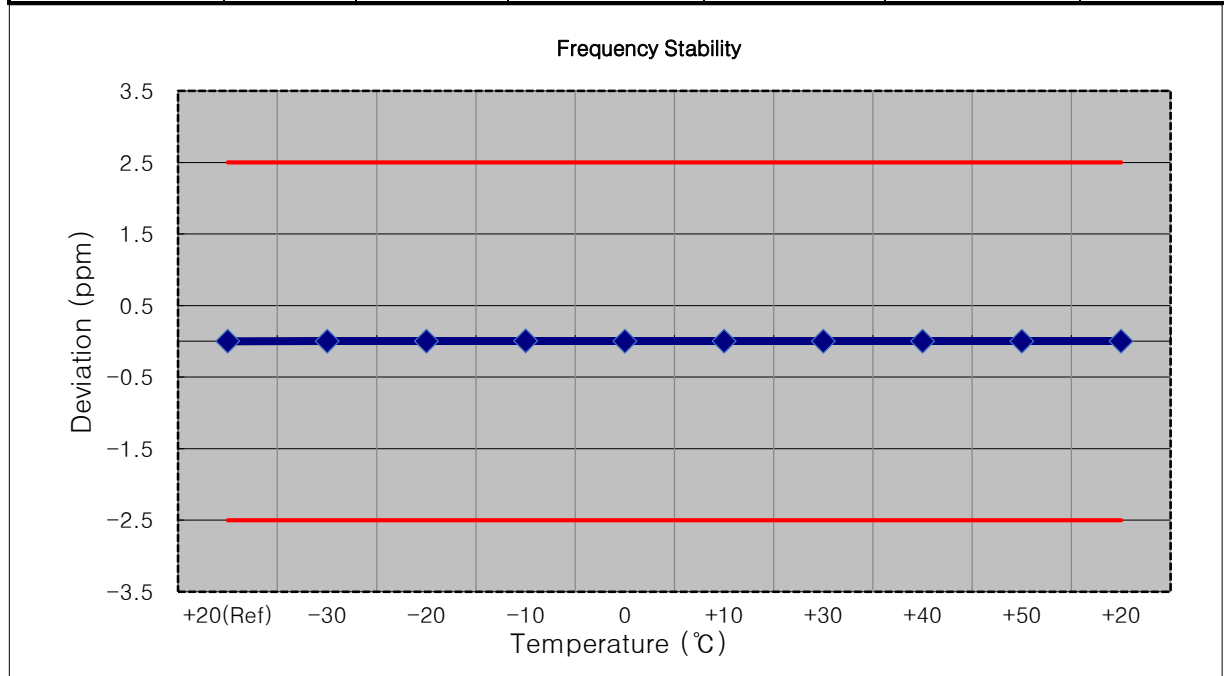

- ▣ MODE: LTE B26
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 26915 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.850 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	836 500 003	0.0	0.000 000	0.000
100%		-30	836 499 999	2.4	0.000 000	0.003
100%		-20	836 499 995	-1.5	0.000 000	-0.002
100%		-10	836 499 999	1.8	0.000 000	0.002
100%		0	836 499 998	1.2	0.000 000	0.001
100%		+10	836 499 999	2.7	0.000 000	0.003
100%		+30	836 500 000	3.1	0.000 000	0.004
100%		+40	836 499 999	2.5	0.000 000	0.003
100%		+50	836 499 999	2.6	0.000 000	0.003
Batt. Endpoint	3.500	+20	836 499 995	-2.1	0.000 000	-0.003

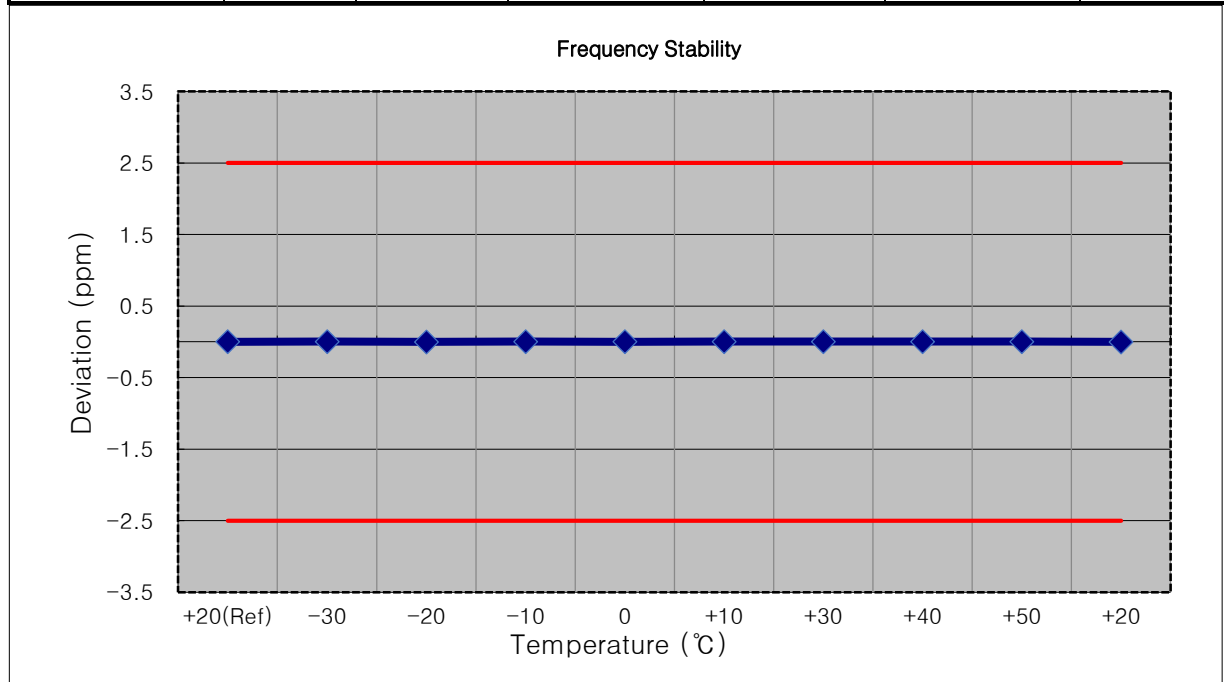

8.7 RECEIVER SPURIOUS EMISSIONS

Frequency Range : 30 MHz ~ 1 GHz

Frequency	Reading	Ant. factor+Cable loss- Amp Gain	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	(H/V)	dB μ V/m	dB μ V/m	dB
No Peak Found						

Frequency Range : Above 1 GHz


Frequency	Reading	Ant. factor+Cable loss- Amp Gain	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	(H/V)	dB μ V/m	dB μ V/m	dB
No Peak Found						

Limit


Frequency (MHz)	Field Strength (μ v/m at 3 meters)
30 - 88	100
88 - 216	150
216 - 960	200
Above 960	500

9. TEST PLOTS


BAND5/ 26. Occupied Bandwidth Plot (1.4M BW Ch.26915 QPSK_RB6_0)

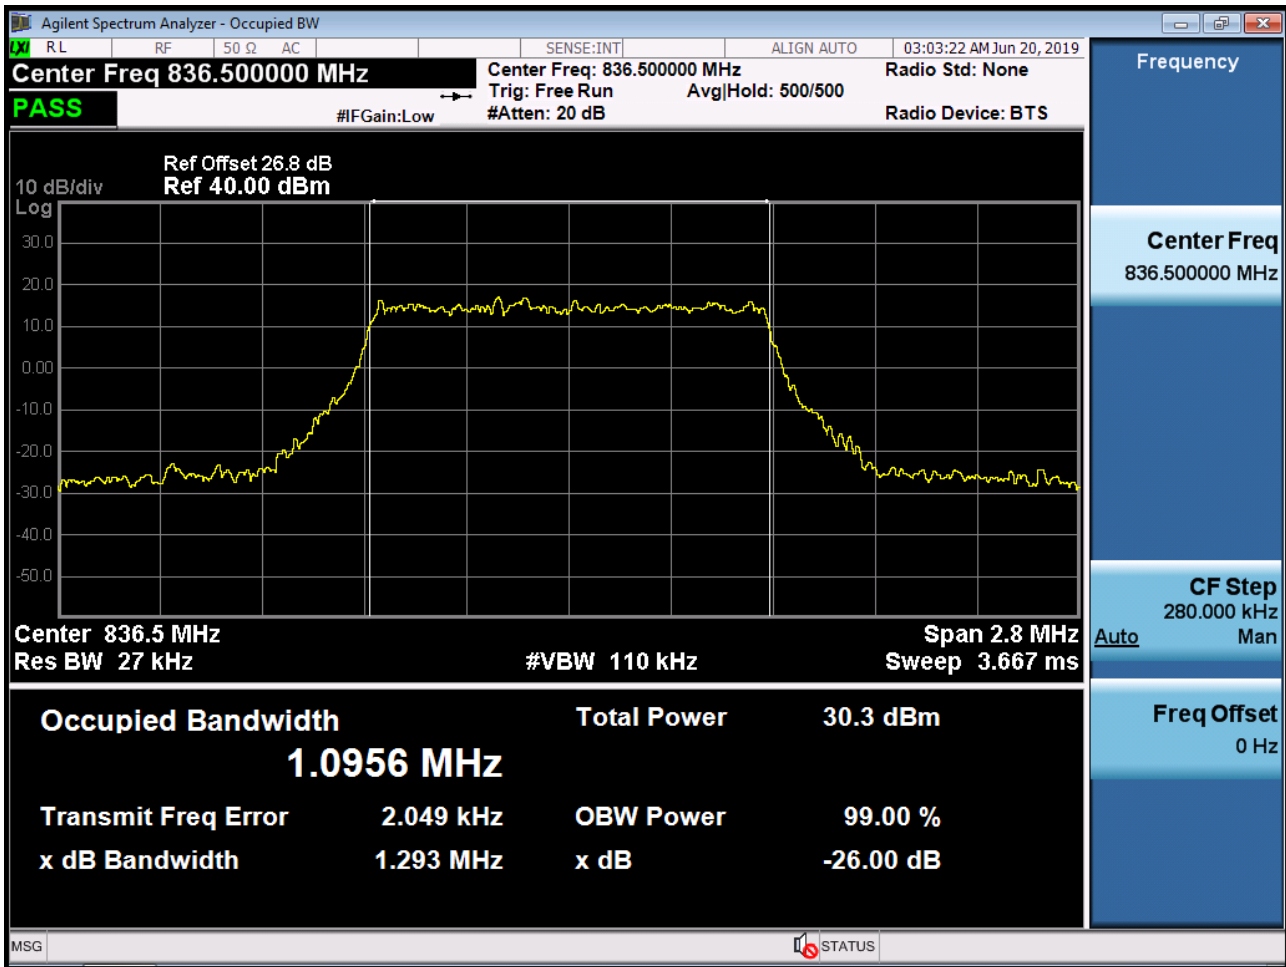


BAND5/ 26. Occupied Bandwidth Plot (1.4M BW Ch.26915 16QAM_RB6_0)

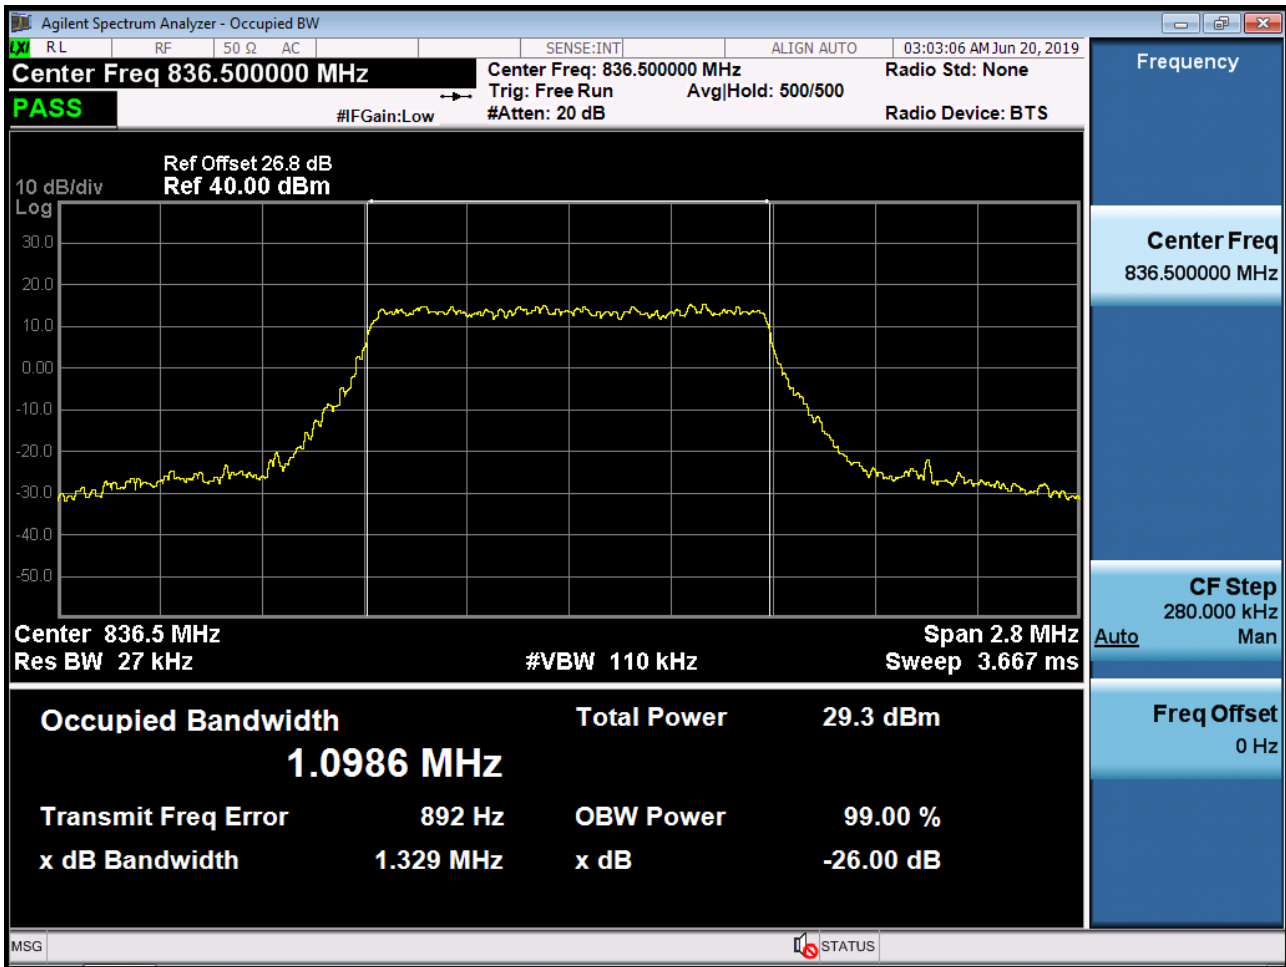


BAND5/ 26. Occupied Bandwidth Plot (3M BW Ch.26915 QPSK_RB15_0)

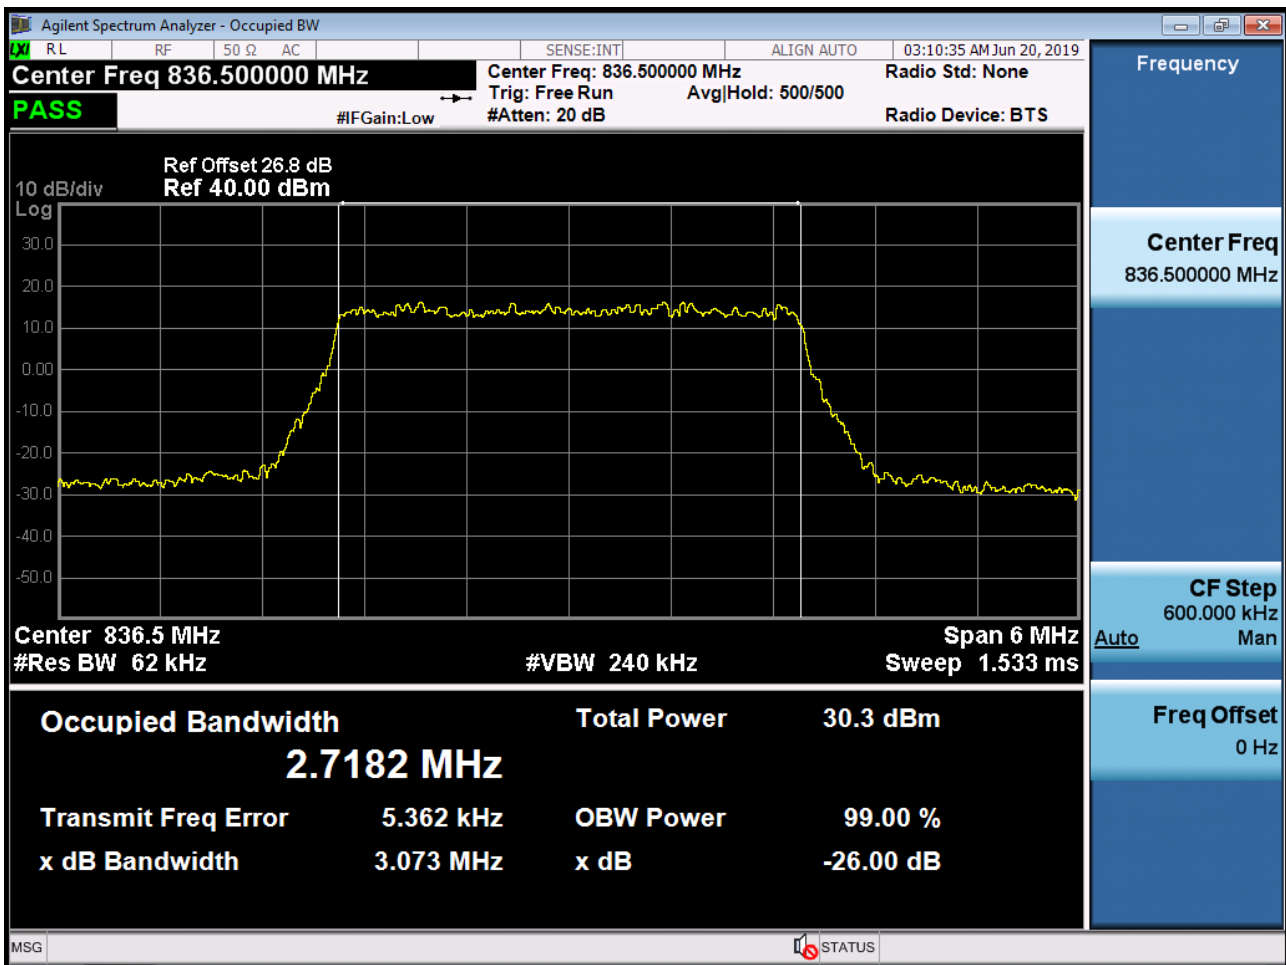


BAND5/ 26. Occupied Bandwidth Plot (3M BW Ch.26915 16QAM_RB15_0)

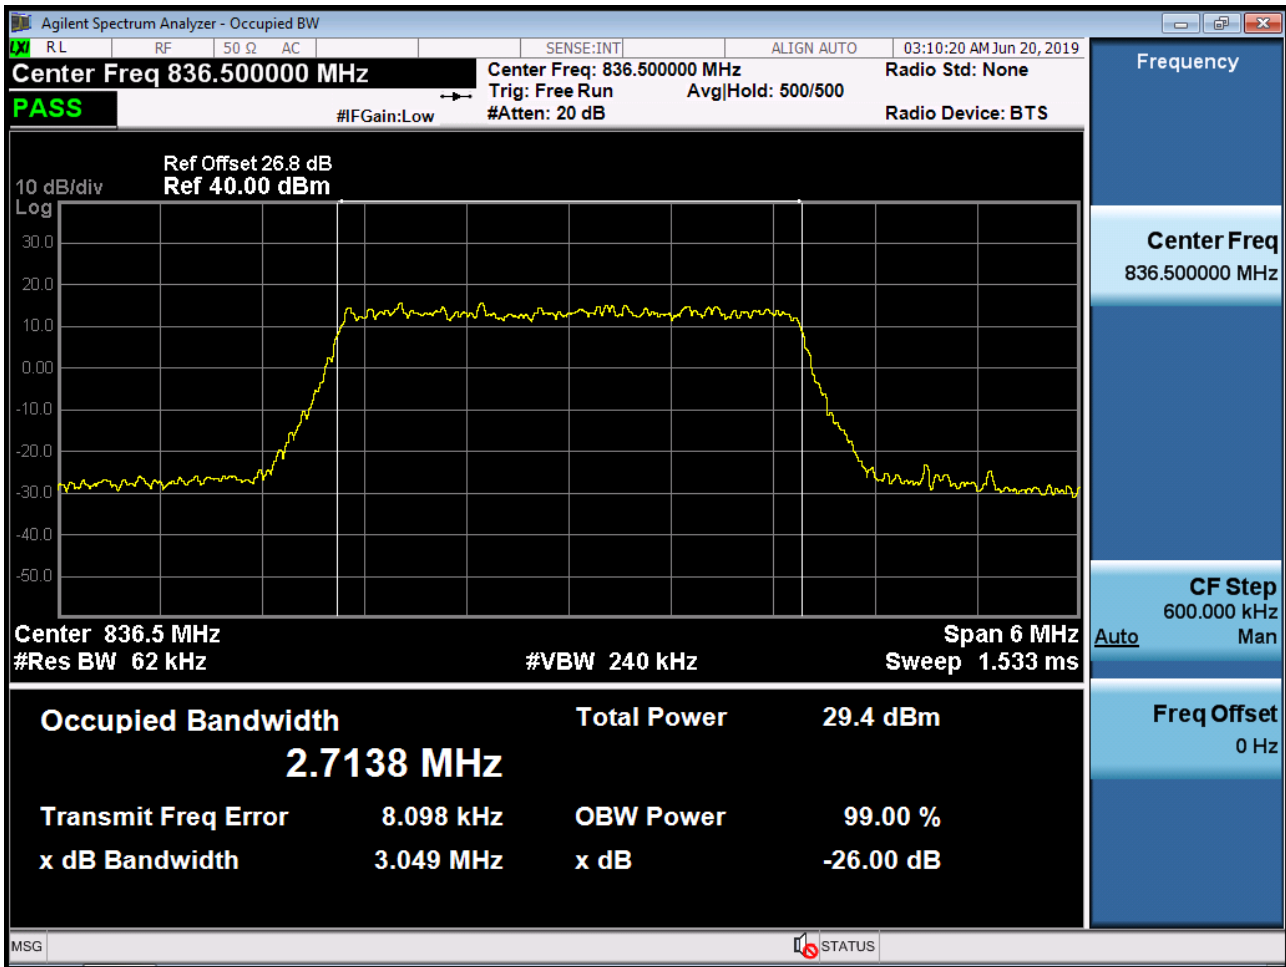


BAND5/ 26. Occupied Bandwidth Plot (5M BW Ch.26915 QPSK_RB25_0)

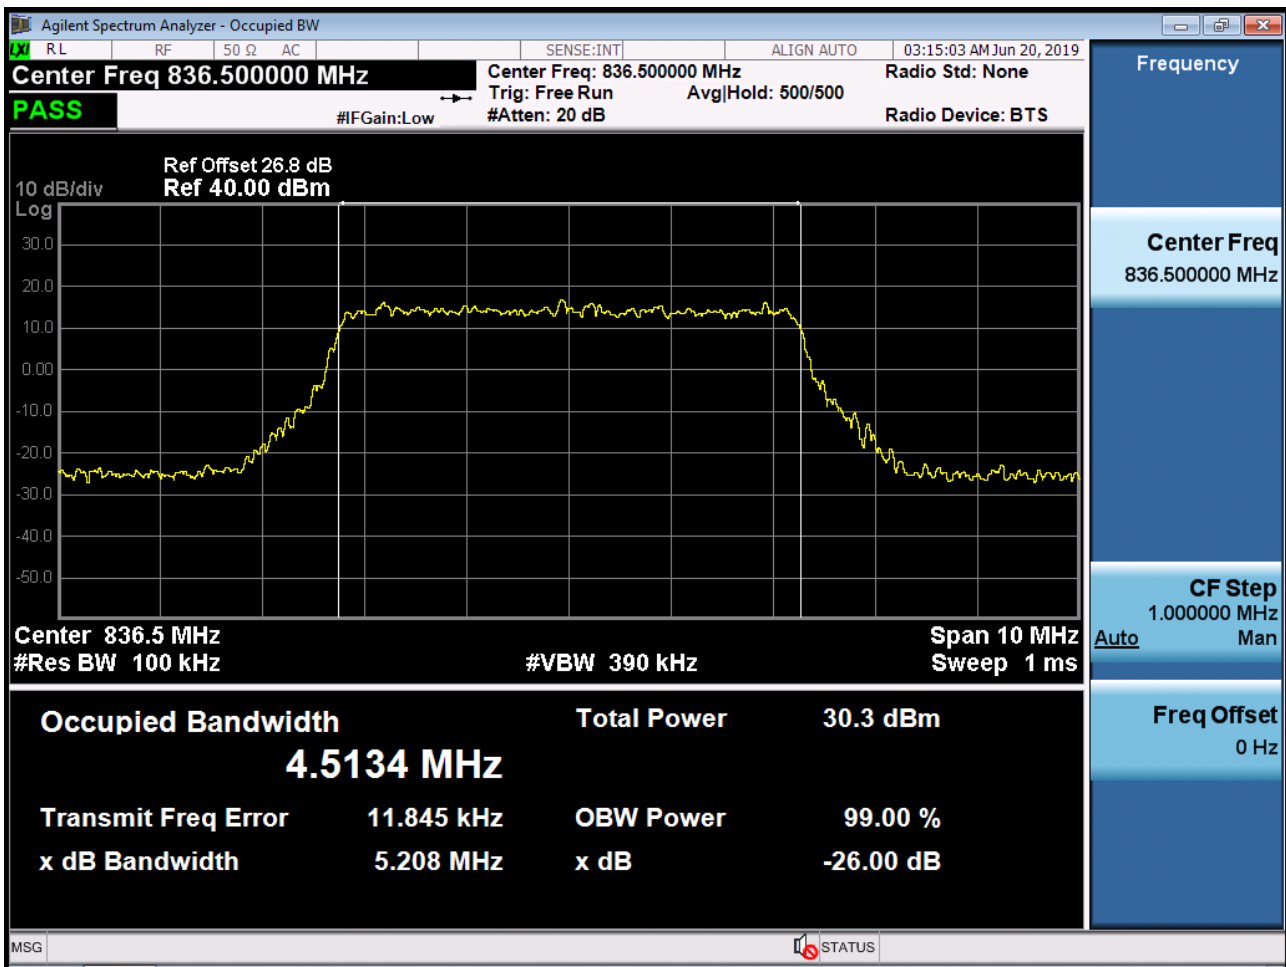


BAND5/ 26. Occupied Bandwidth Plot (5M BW Ch.26915 16QAM_RB25_0)

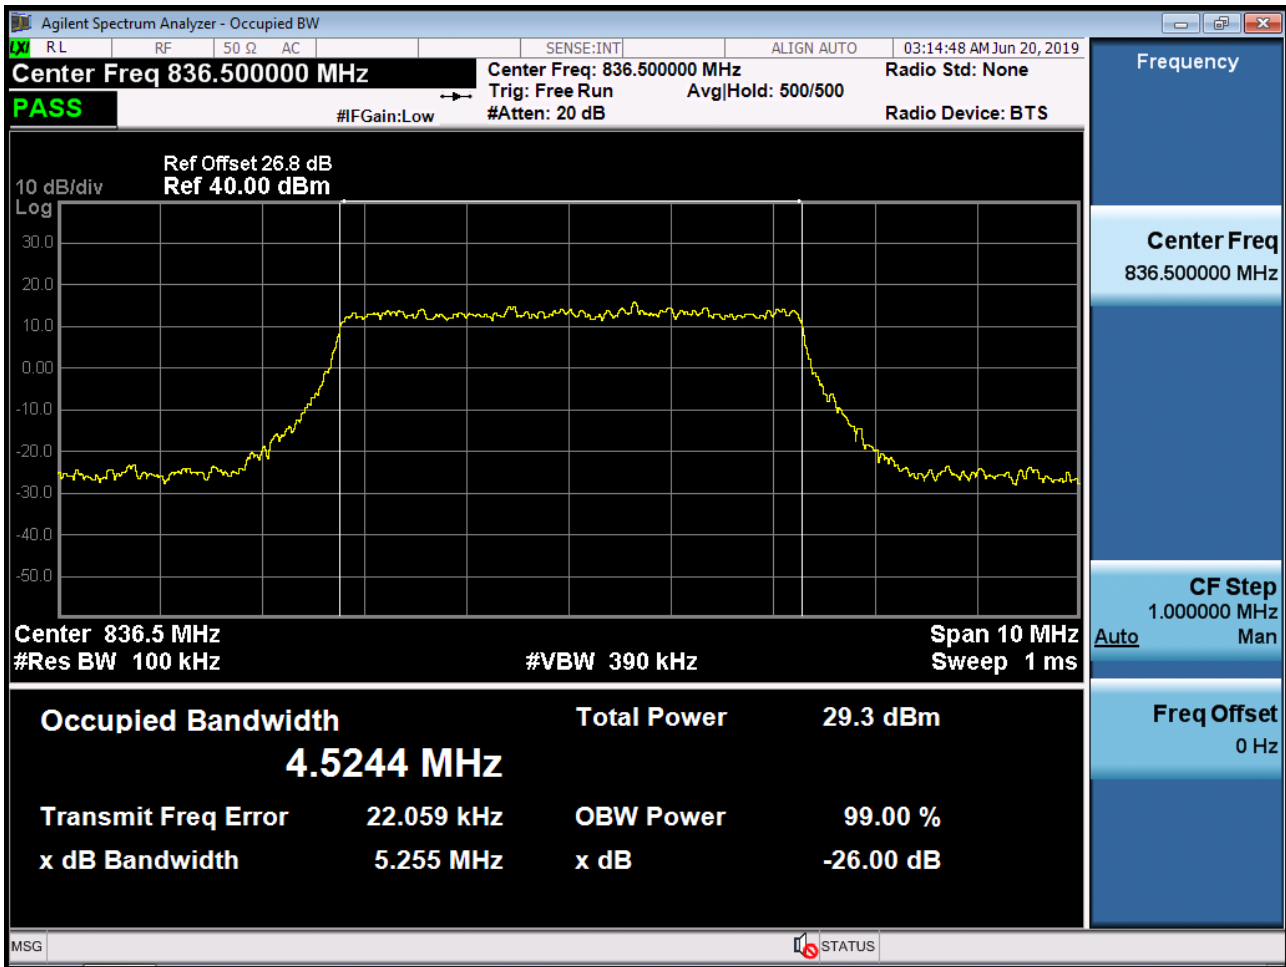


BAND5/ 26. Occupied Bandwidth Plot (10M BW Ch.26915 QPSK_RB50_0)

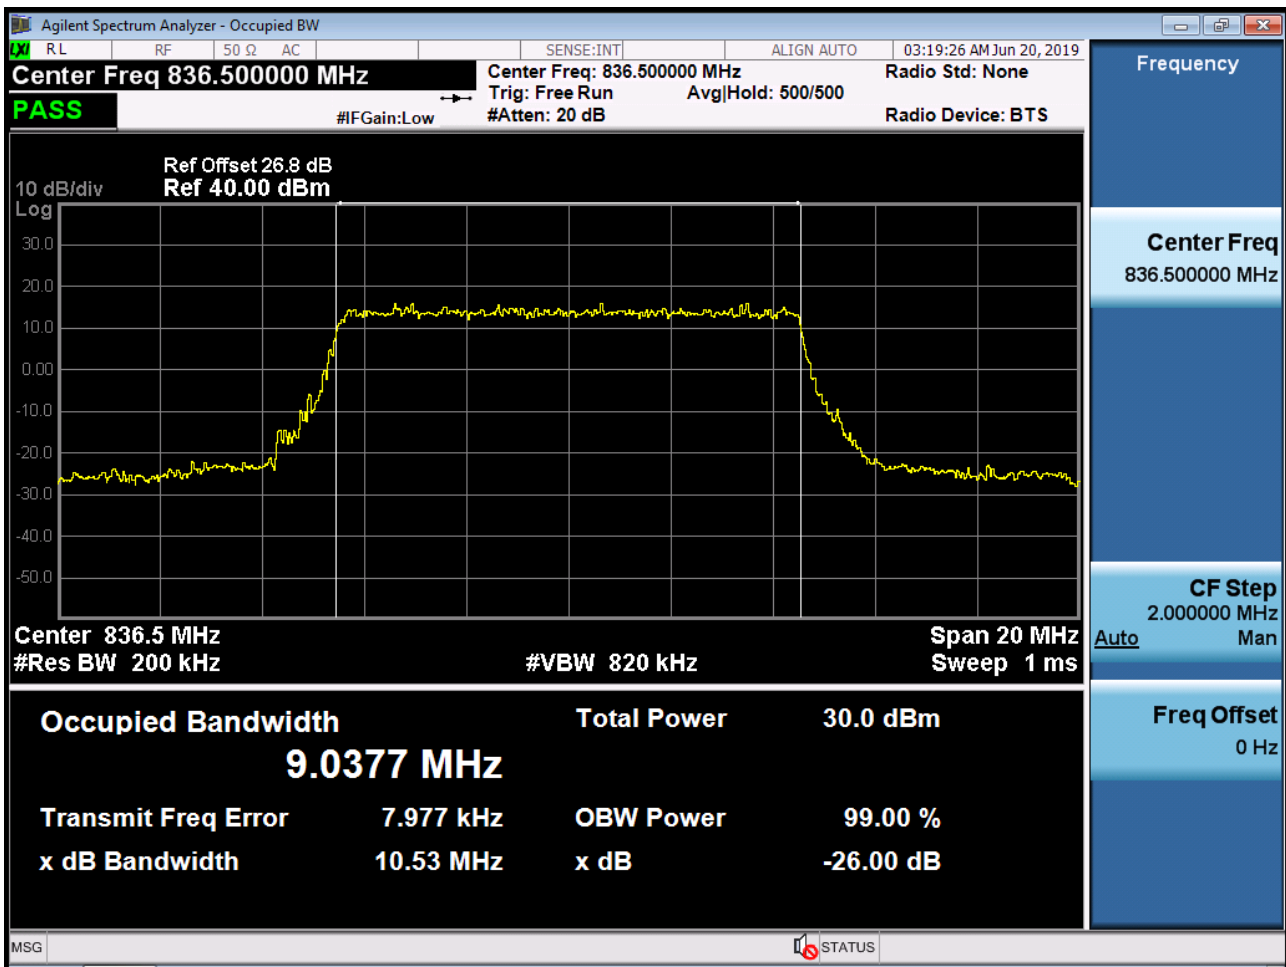


BAND5/ 26. Occupied Bandwidth Plot (10M BW Ch.26915 16QAM_RB50_0)

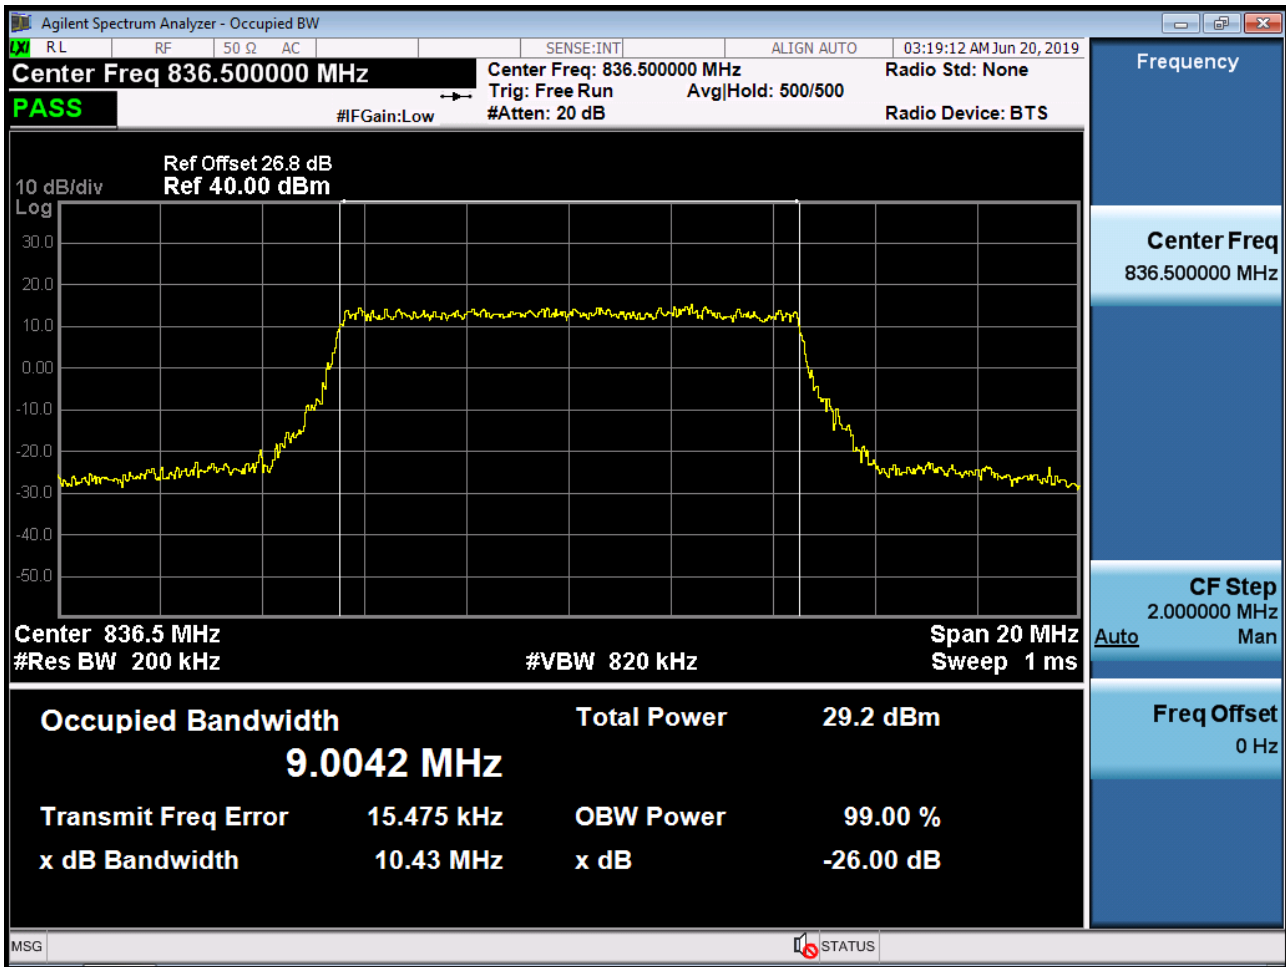


BAND 26. Occupied Bandwidth Plot (15M BW Ch.26915 QPSK RB 75_0)

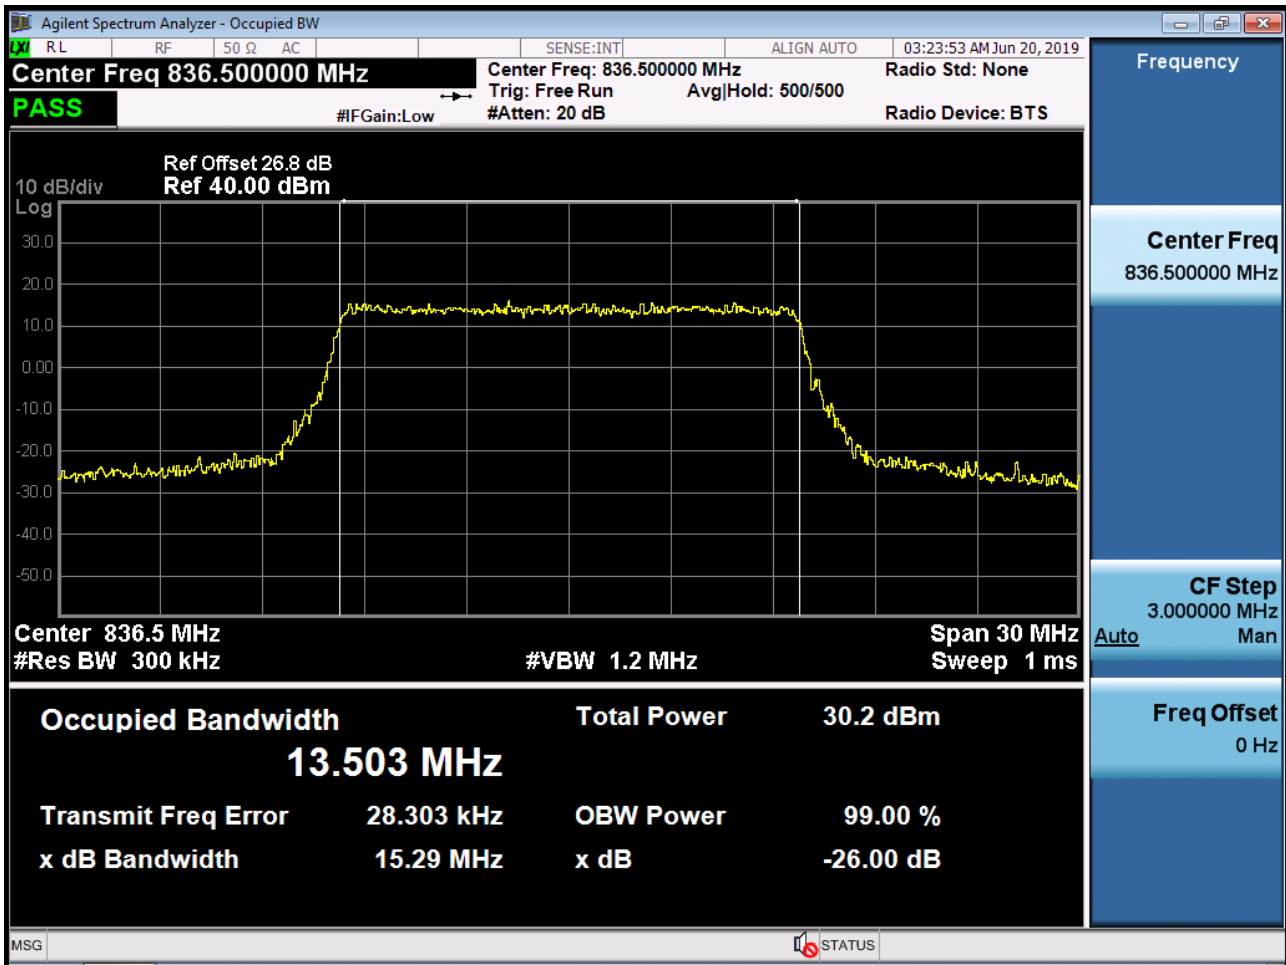


BAND 26. Occupied Bandwidth Plot (15M BW Ch.26915 16QAM RB 75_0)

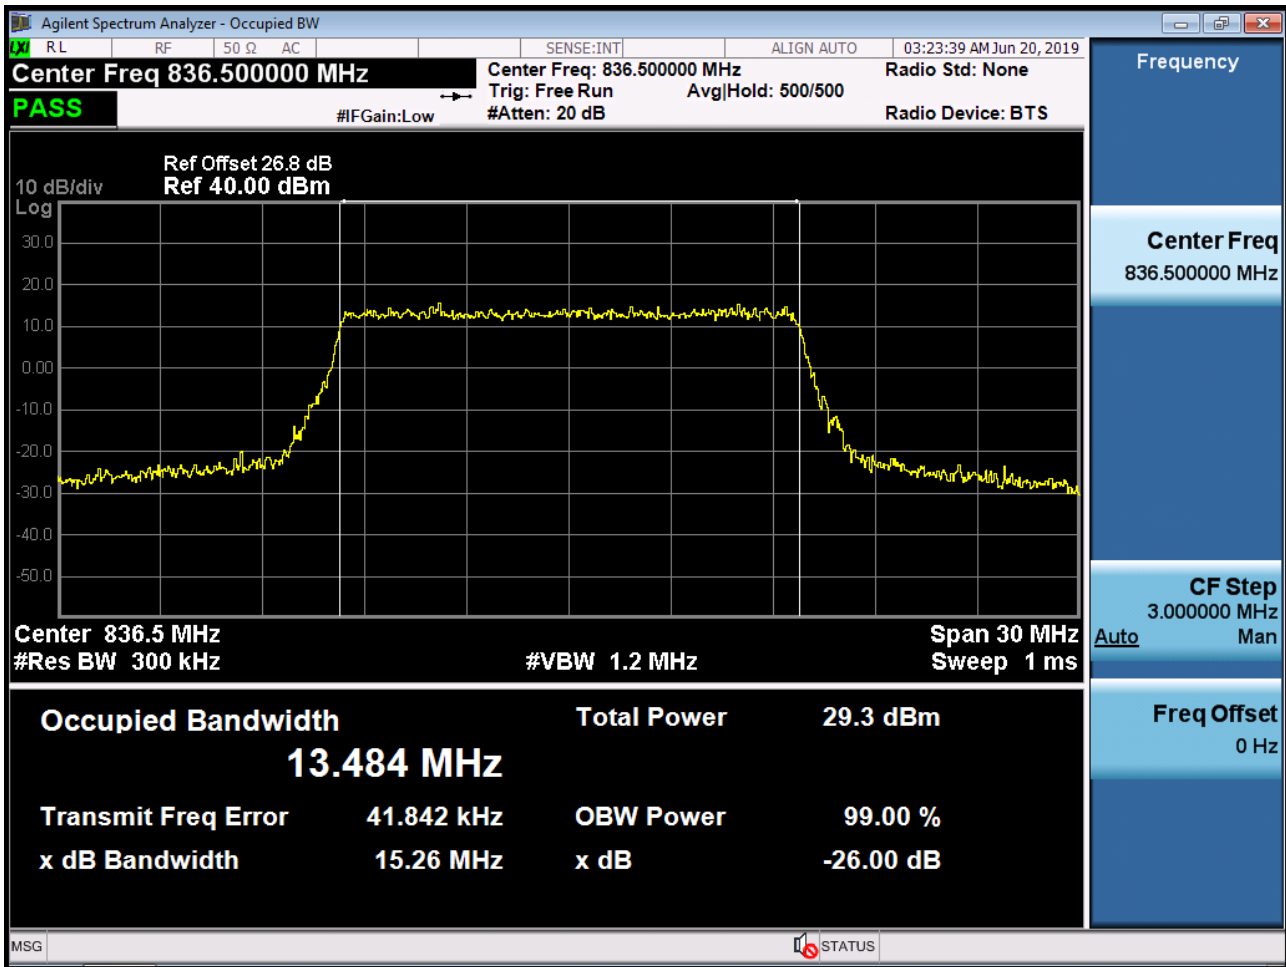

BAND5/ 26. Lower Band Edge Plot (1.4M BW Ch.26797 QPSK_RB1_Offset 0)

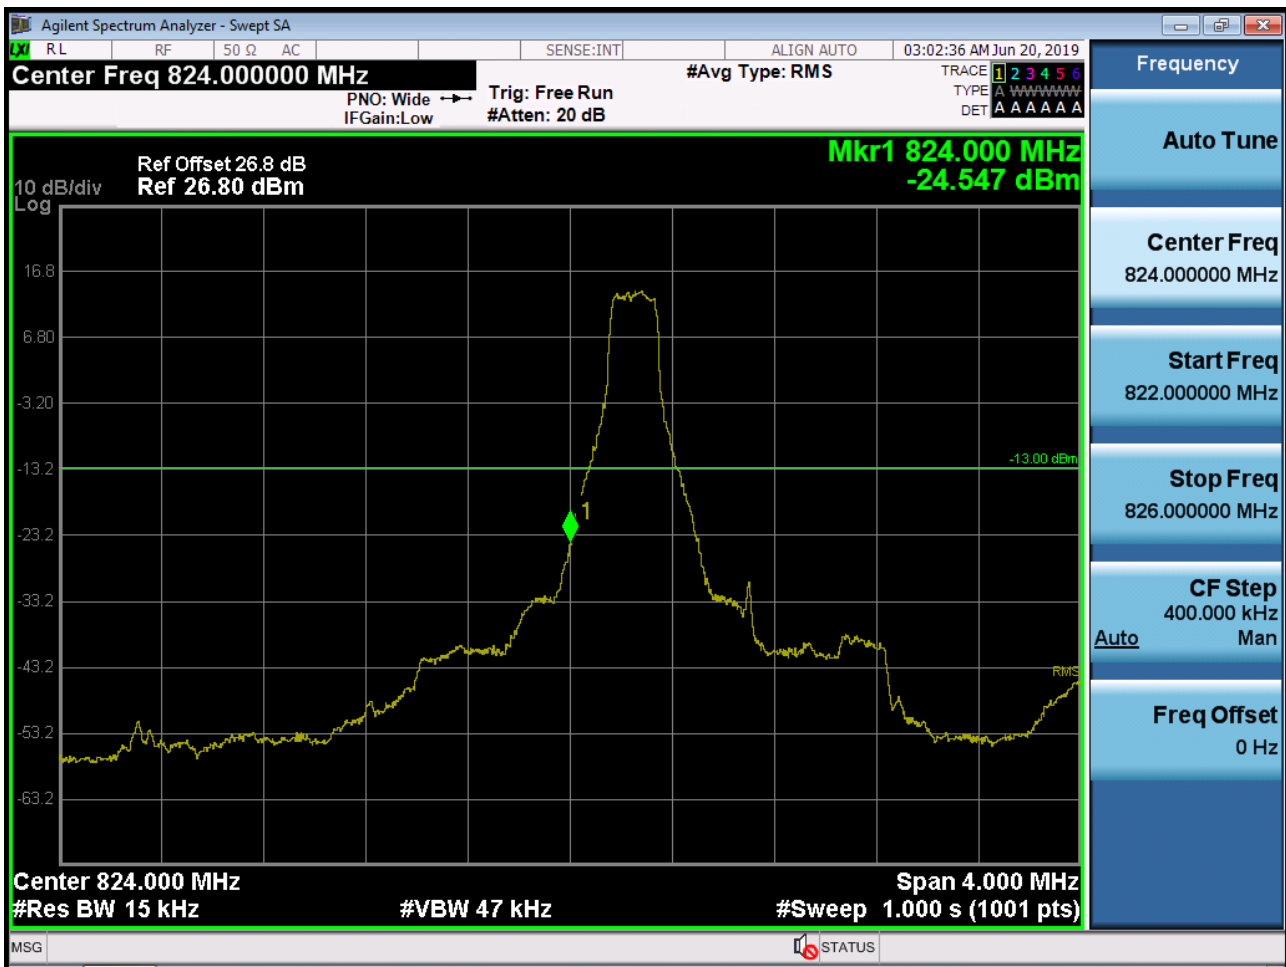

BAND5/ 26. Lower Band Edge Plot (1.4M BW Ch.26797 QPSK_RB6_Offset 0)

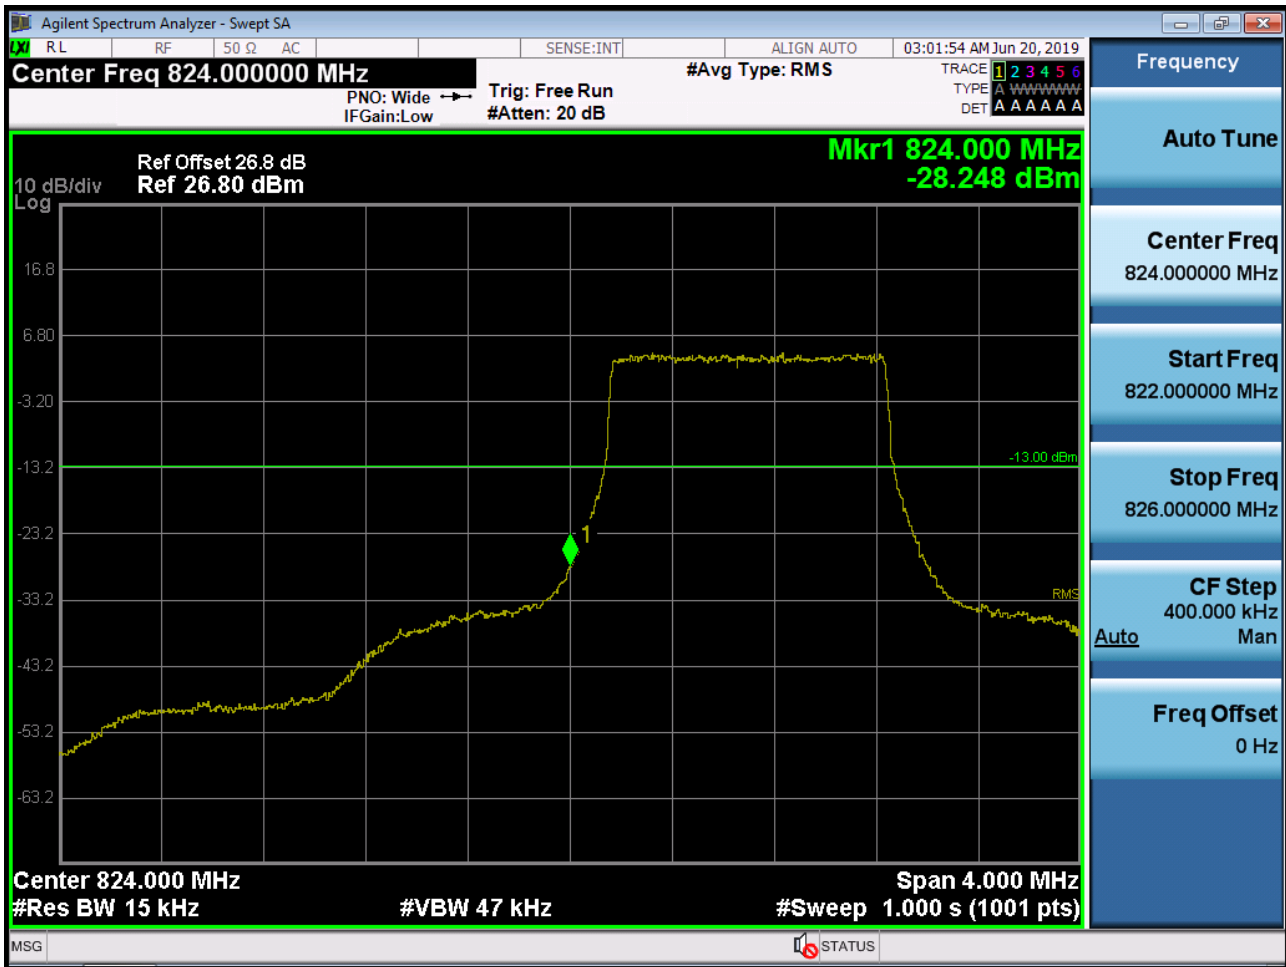

BAND5/ 26. Lower Extended Band Edge Plot (1.4M BW Ch.26797 QPSK_RB6_0)



BAND5/ 26. Lower Band Edge Plot (3M BW Ch.26805 QPSK_RB1_Offset 0)



BAND5/ 26. Lower Band Edge Plot (3M BW Ch.26805 QPSK_RB15_Offset 0)



BAND5/ 26. Lower Extended Band Edge Plot (3M BW Ch.26805 QPSK_RB15_0)




BAND5/ 26. Lower Band Edge Plot (5M BW Ch.26815 QPSK_RB1_Offset 0)



BAND5/ 26. Lower Band Edge Plot (5M BW Ch.26815 QPSK_RB25_Offset 0)



BAND5/ 26. Lower Extended Band Edge Plot (5M BW Ch.26815 QPSK_RB25_0)

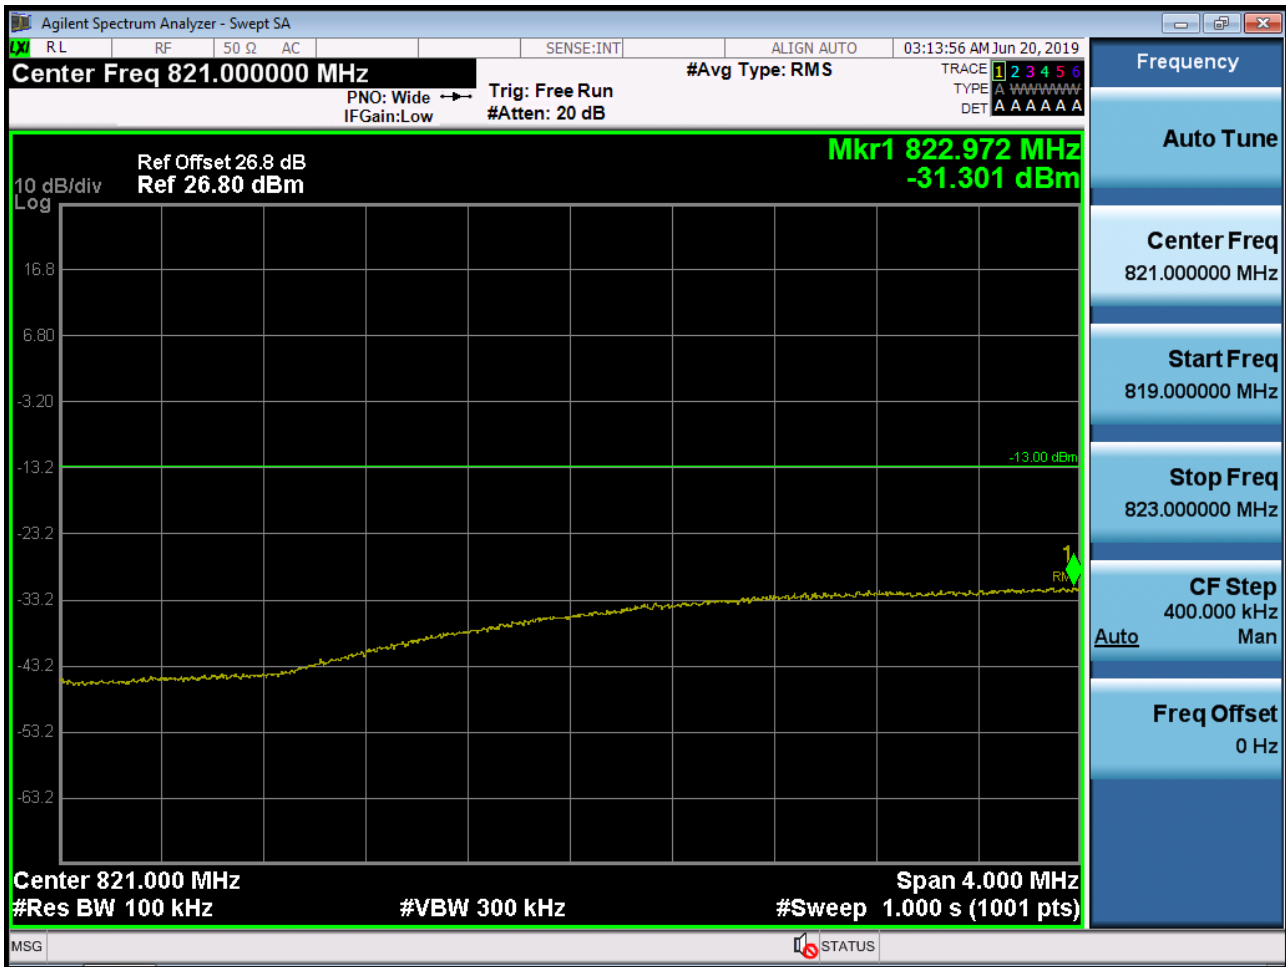


BAND5/ 26. Lower Band Edge Plot (10M BW Ch.26840 QPSK_RB1_Offset 0)



BAND5/ 26. Lower Band Edge Plot (10M BW Ch.26840 QPSK_RB50_Offset 0)



BAND5/ 26. Lower Extended Band Edge Plot (10M BW Ch.26840 QPSK_RB50_0)

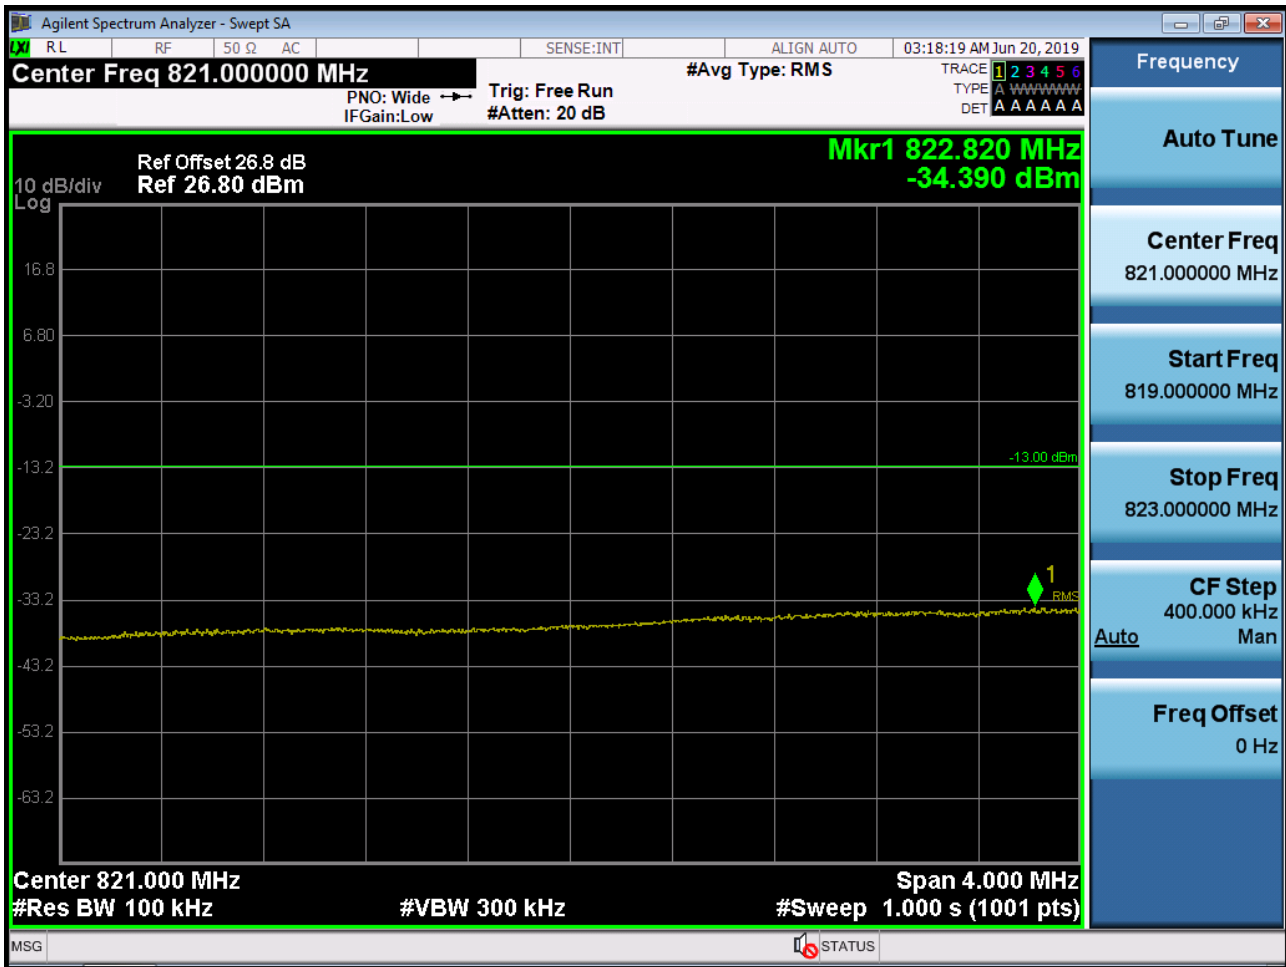

BAND 26. Lower Band Edge Plot (15M BW Ch.26865 QPSK_RB75_Offset 0) -1




BAND 26. Lower Band Edge Plot (15M BW Ch.26865 QPSK_RB75_Offset 0) -2



BAND 26. Lower Extended Band Edge Plot (15M BW Ch.26865 QPSK_RB75_0) -3



BAND5/ 26. Upper Band Edge Plot (1.4M BW Ch.27033 QPSK_RB1_Offset 5)

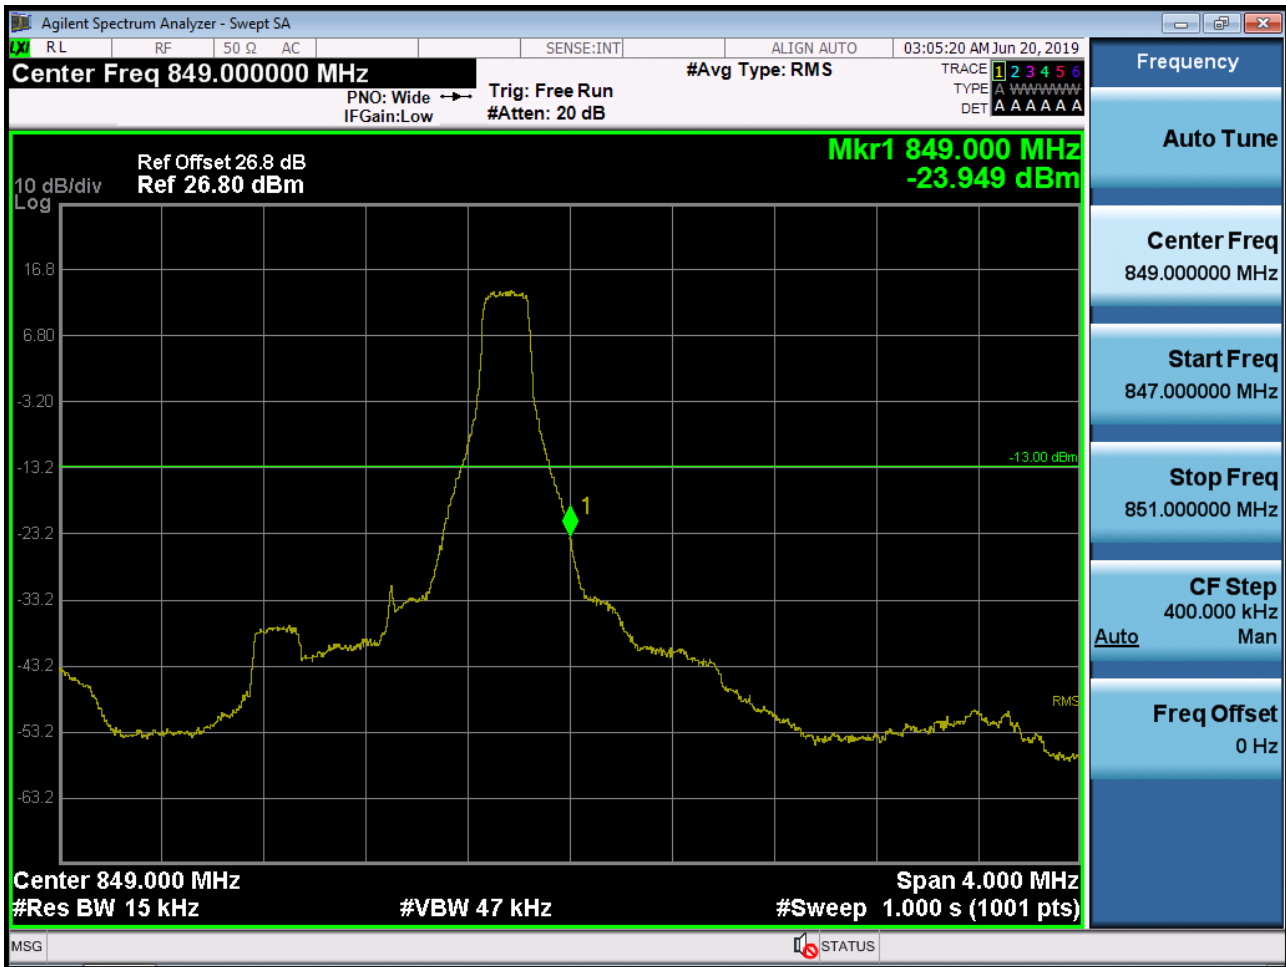

BAND5/ 26. Upper Band Edge Plot (1.4M BW Ch.27033 QPSK_RB6_Offset 0)



BAND5/ 26. Upper Extended Band Edge Plot (1.4M BW Ch.27033 QPSK_RB6_0)



BAND5/ 26. Upper Band Edge Plot (3M BW Ch.27025 QPSK_RB1_Offset 14)



BAND5/ 26. Upper Band Edge Plot (3M BW Ch.27025 QPSK_RB15_Offset 0)




BAND5/ 26. Upper Extended Band Edge Plot (3M BW Ch.27025 QPSK_RB15_0)



BAND5/ 26. Upper Band Edge Plot (5M BW Ch.27015 QPSK_RB1_Offset 24)



BAND5/ 26. Upper Band Edge Plot (5M BW Ch.27015 QPSK_RB25_Offset 0)

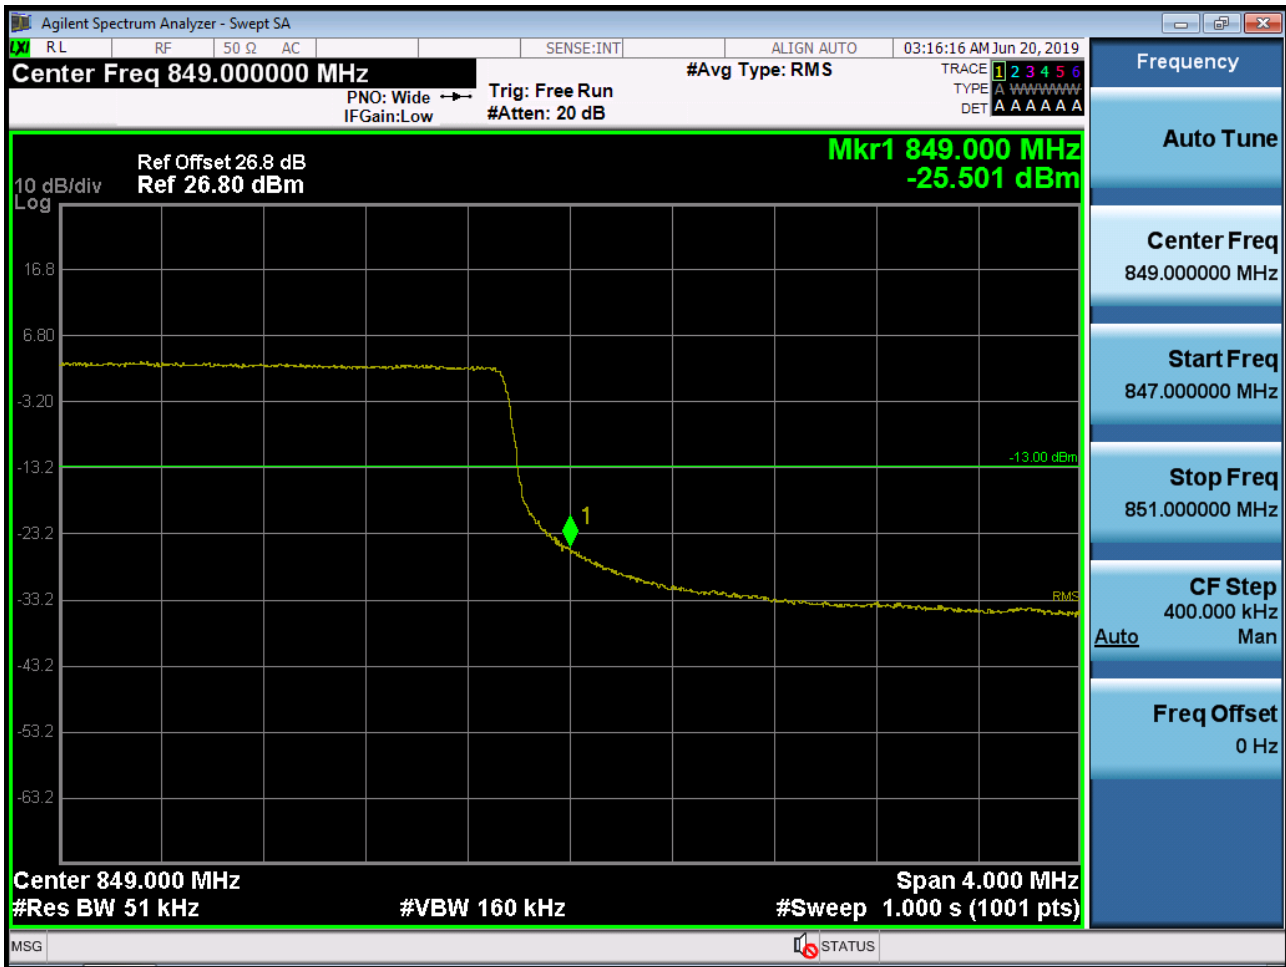

BAND5/ 26. Upper Extended Band Edge Plot (5M BW Ch.27015 QPSK_RB25_0)



BAND5/ 26. Upper Band Edge Plot (10M BW Ch.26990 QPSK_RB1_Offset 49)



BAND5/ 26. Upper Band Edge Plot (10M BW Ch.26990 QPSK_RB50_Offset 0)



BAND5/ 26. Upper Extended Band Edge Plot (10M BW Ch.26990 QPSK_RB50_0)



BAND 26. Upper Band Edge Plot (15M BW Ch.26965 QPSK_RB1_Offset 74) -1




BAND 26. Upper Band Edge Plot (15M BW Ch.26965 QPSK_RB75_Offset 0) -2




BAND 26. Upper Extended Band Edge Plot (15M BW Ch.26965 QPSK_RB75_0) -3




BAND5/ 26. Conducted Spurious Plot (26797ch_1.4MHz_QPSK_RB 1_0)

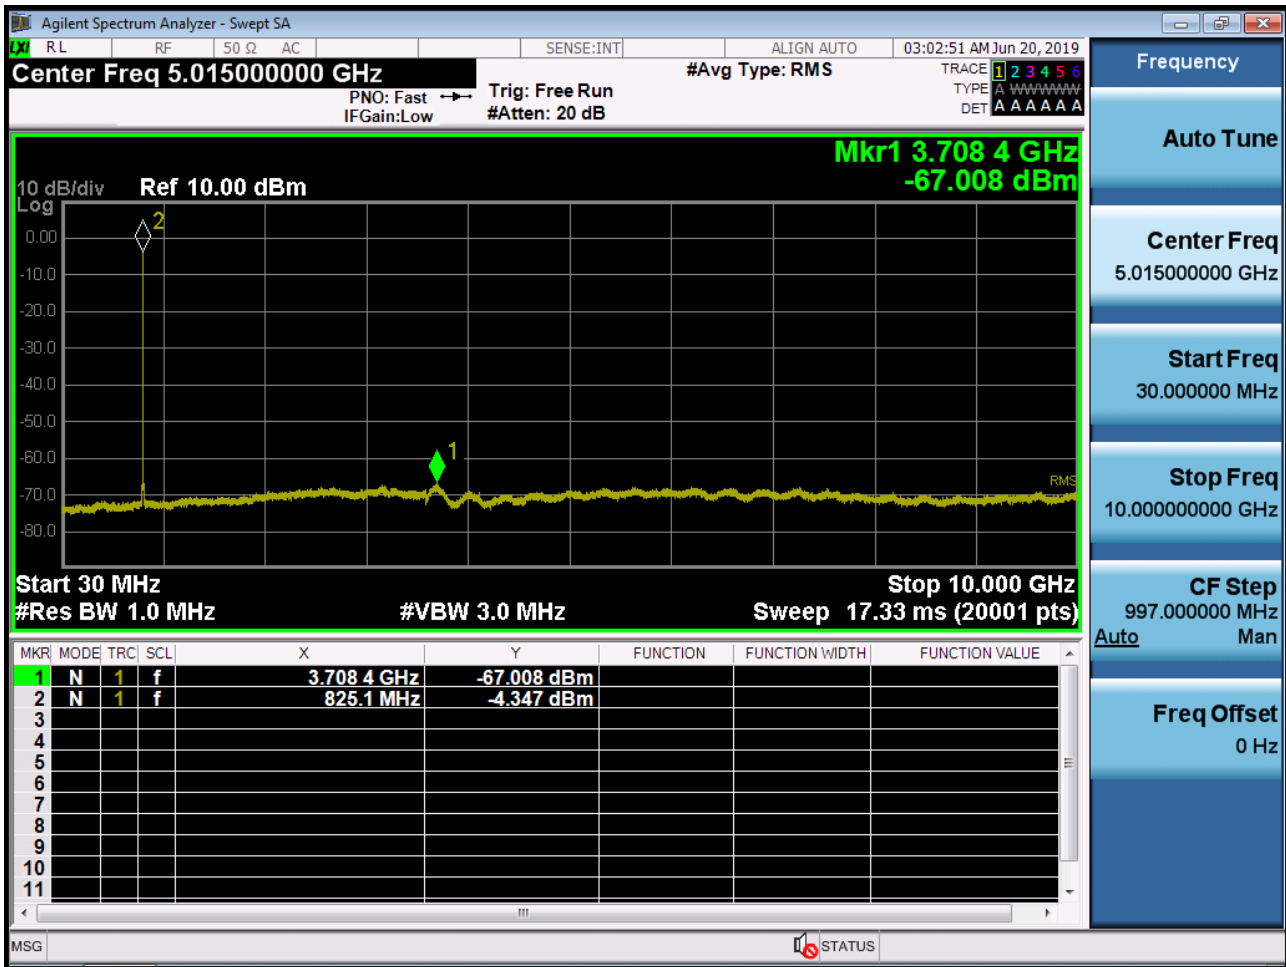


BAND5/ 26. Conducted Spurious Plot (26915ch_1.4MHz_QPSK_RB 1_0)

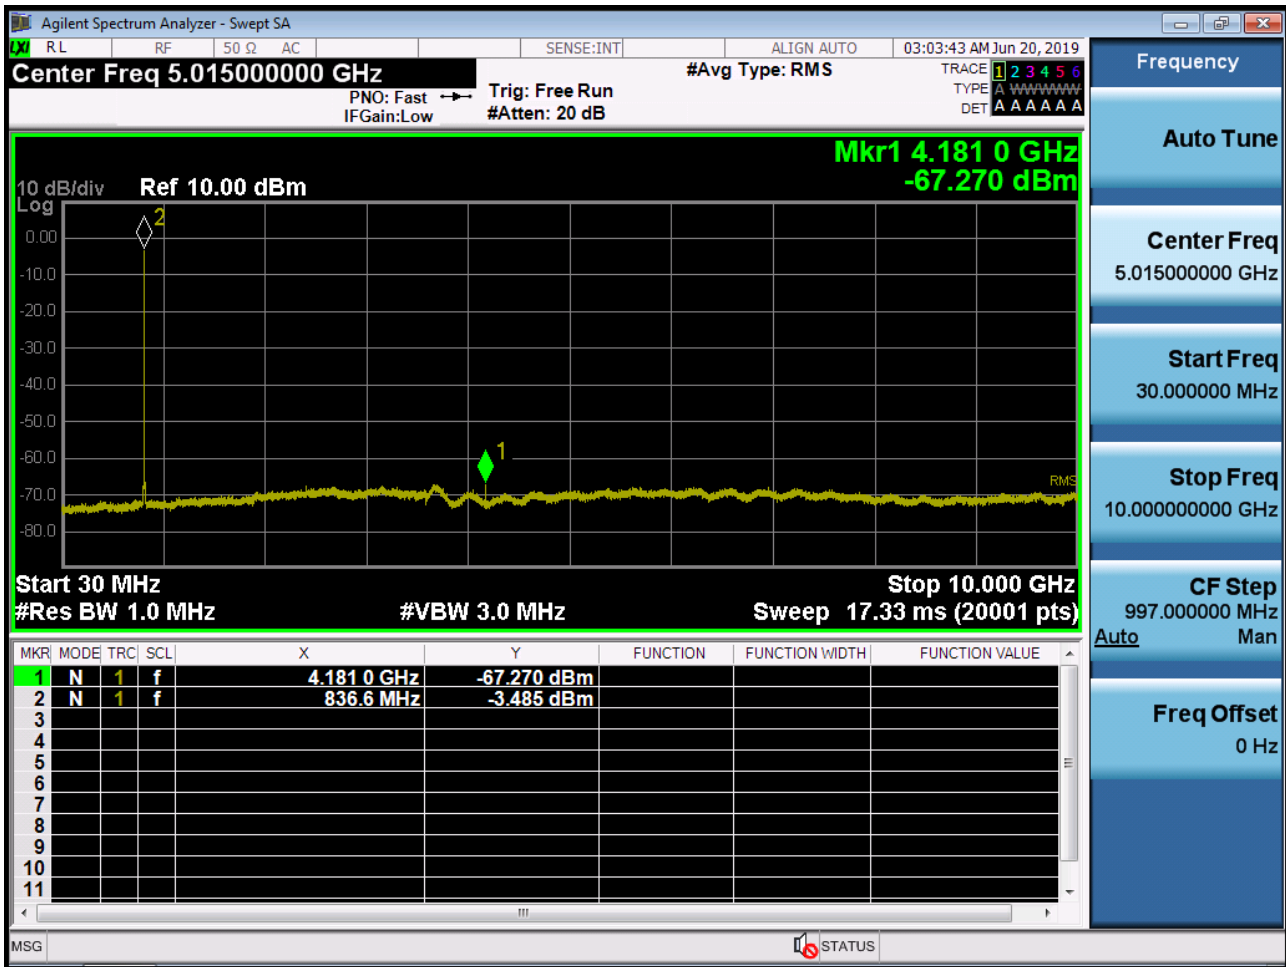


BAND5/ 26. Conducted Spurious Plot (27033ch_1.4MHz_QPSK_RB 1_0)

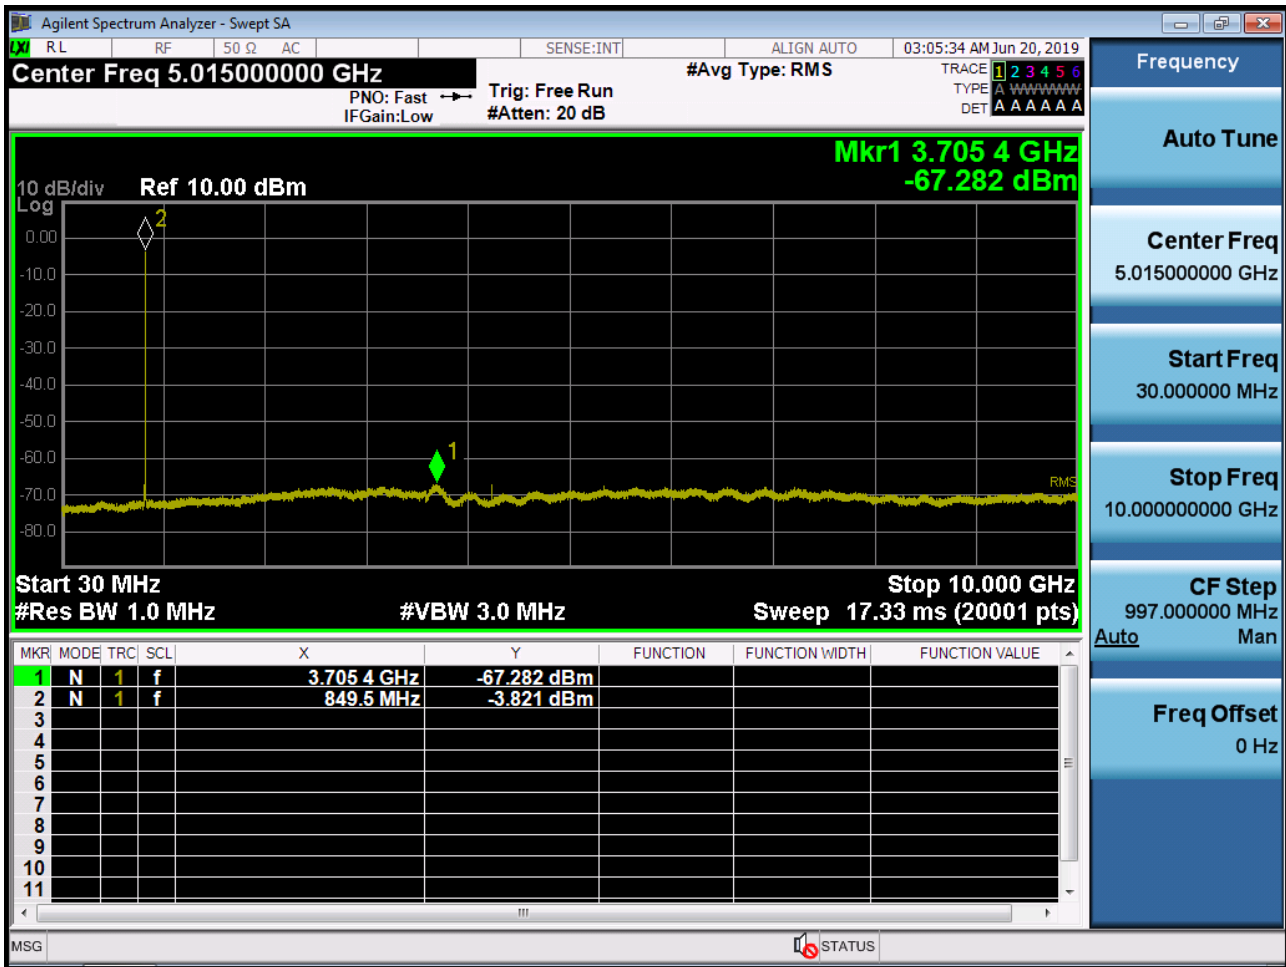


BAND5/ 26. Conducted Spurious Plot (26805ch_3MHz_QPSK_RB 1_0)

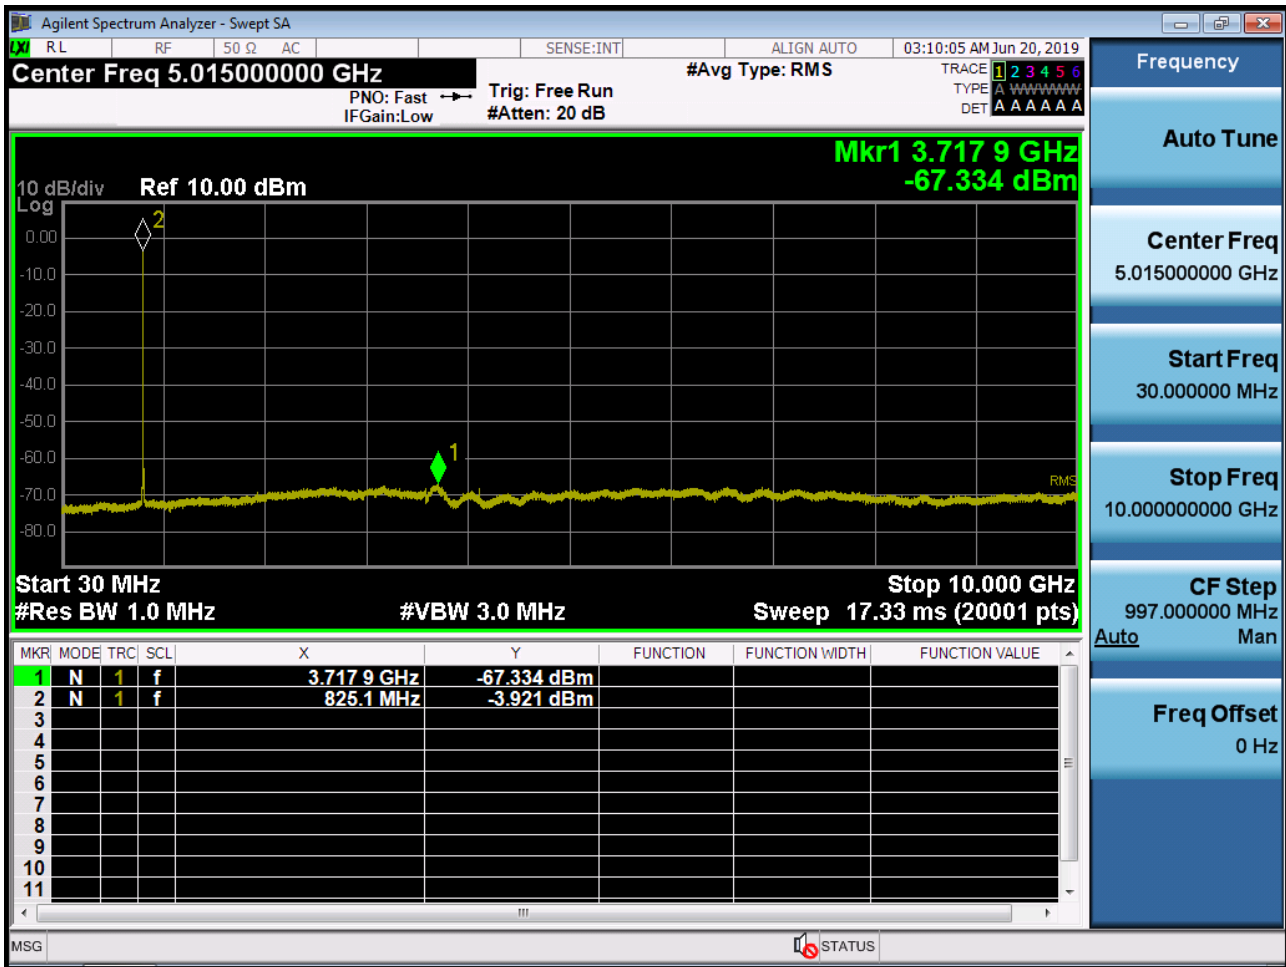


BAND5/ 26. Conducted Spurious Plot (26915ch_3MHz_QPSK_RB 1_0)

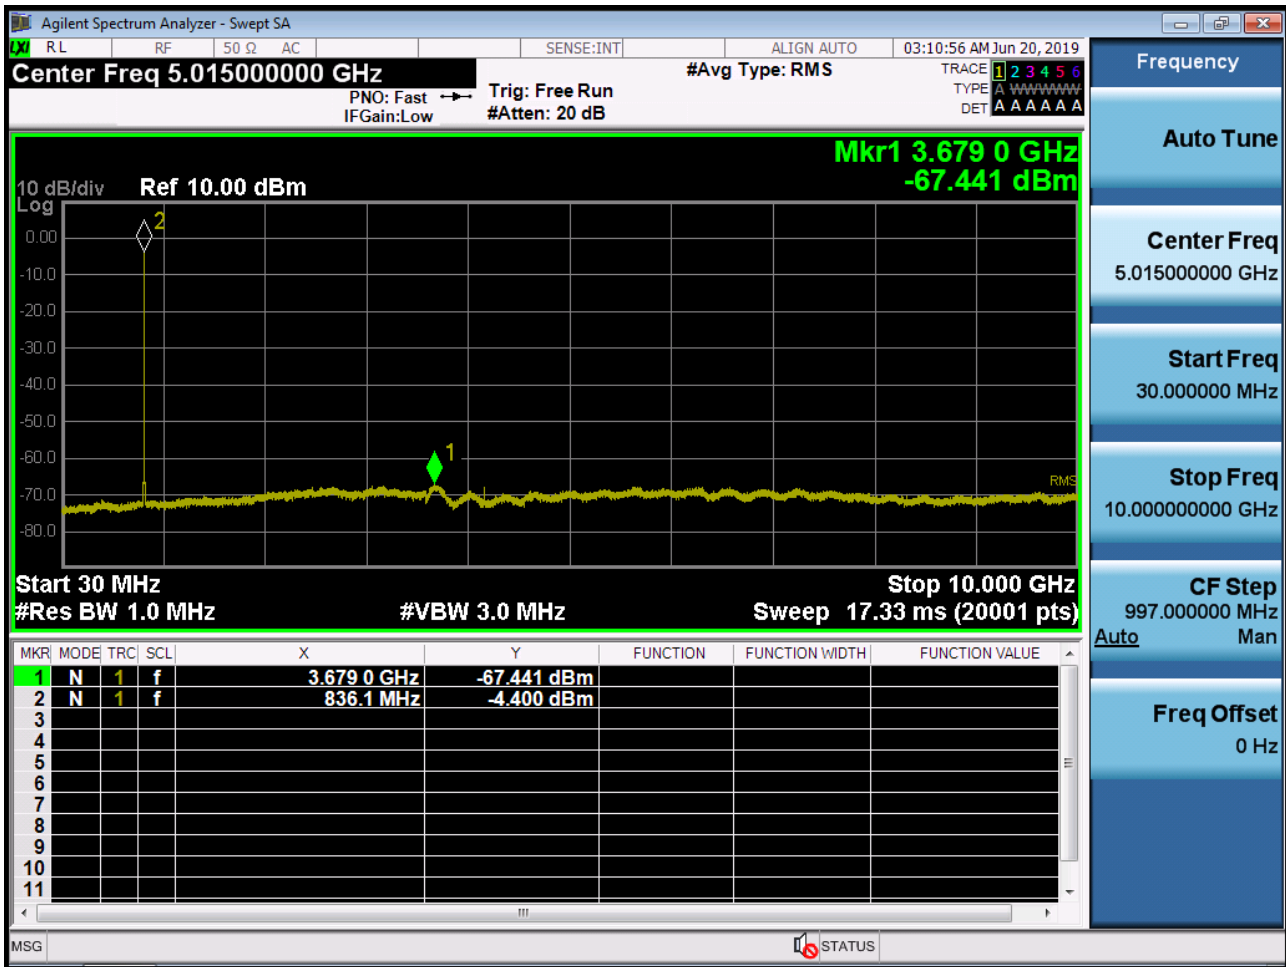


BAND5/ 26. Conducted Spurious Plot (27025ch_3MHz_QPSK_RB 1_0)

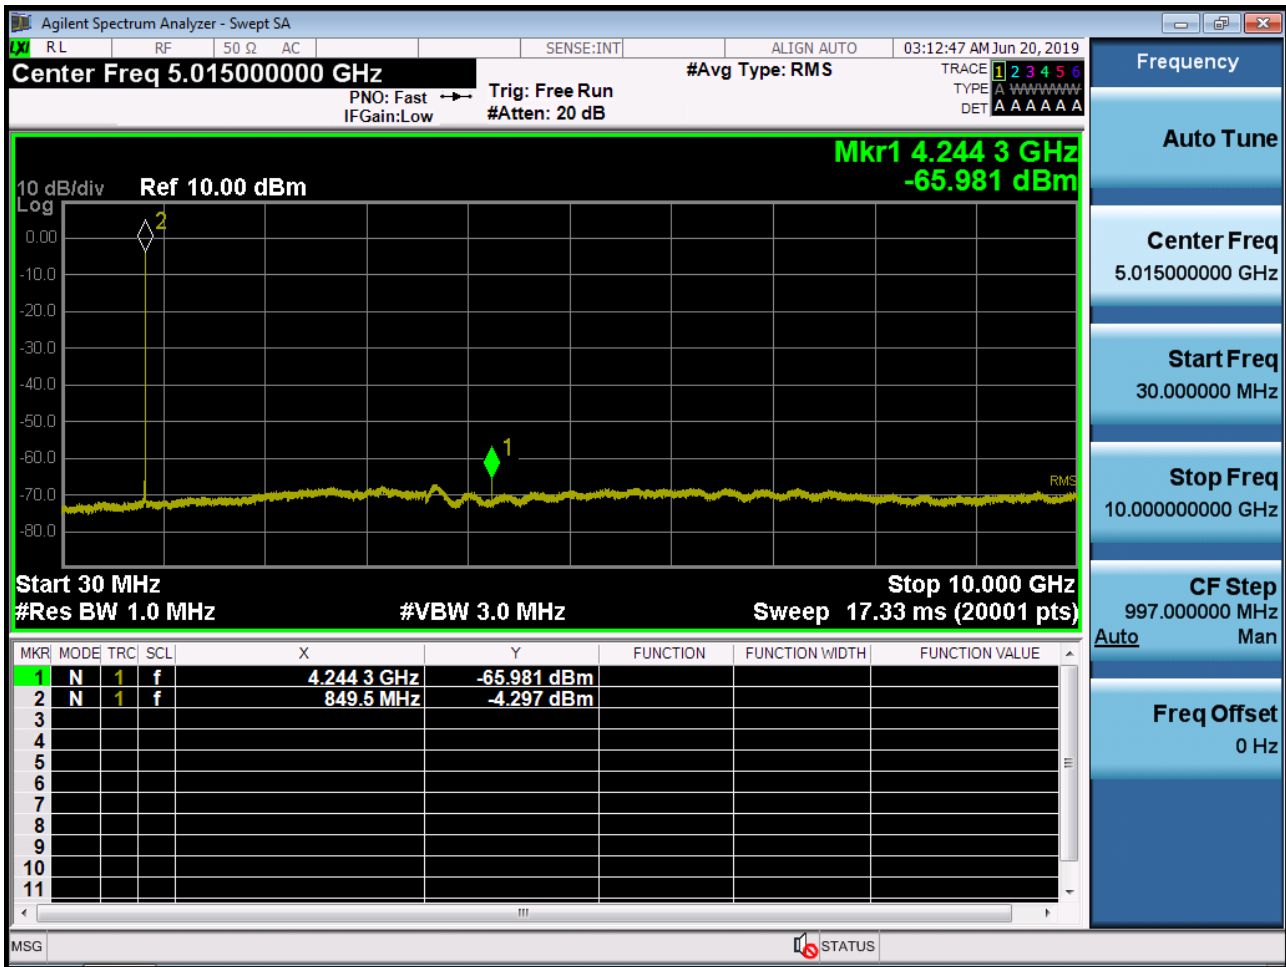


BAND5/ 26. Conducted Spurious Plot (26815ch_5MHz_QPSK_RB 1_0)

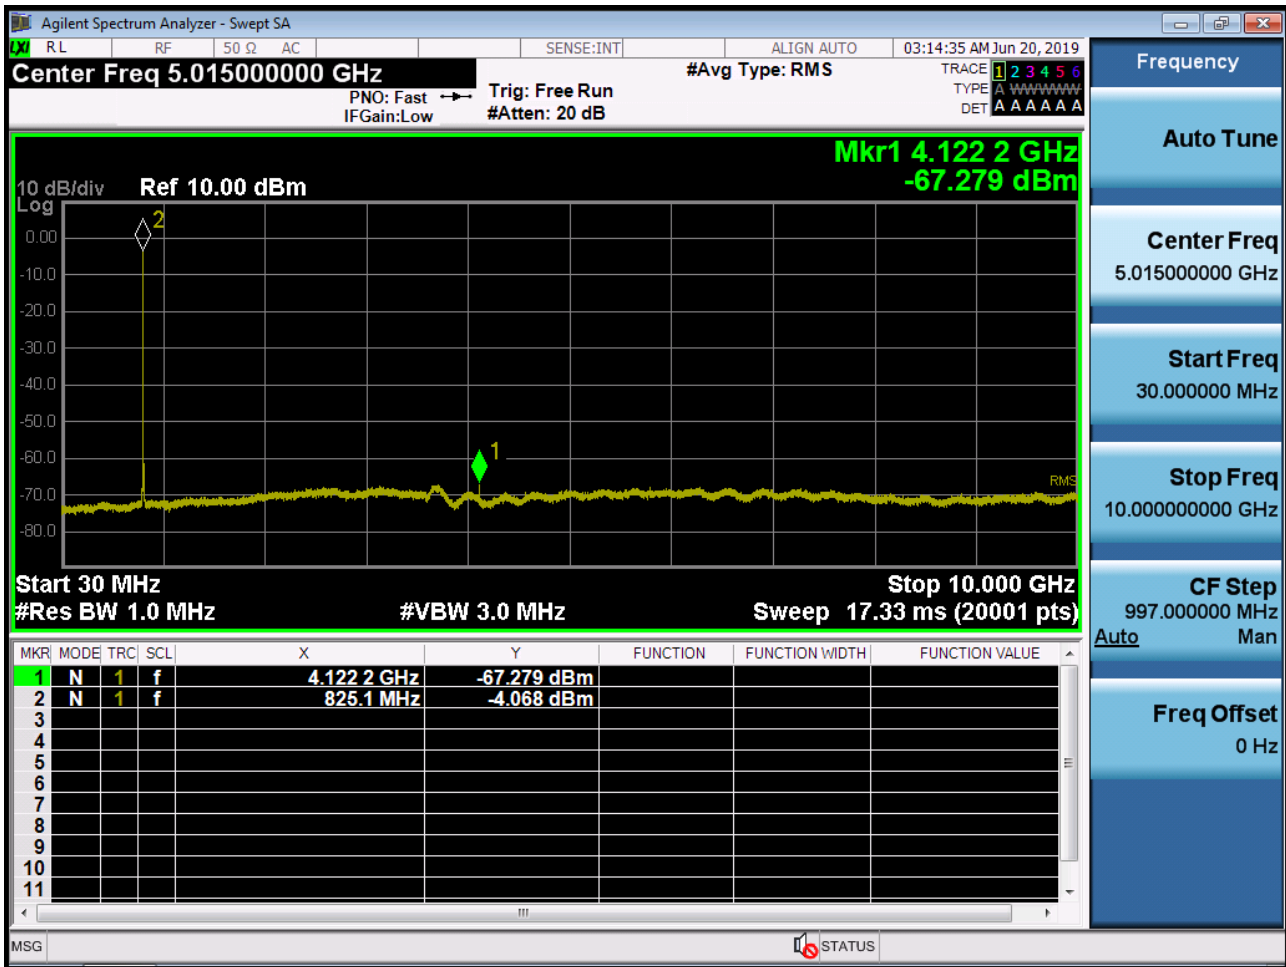


BAND5/ 26. Conducted Spurious Plot (26915ch_5MHz_QPSK_RB 1_0)

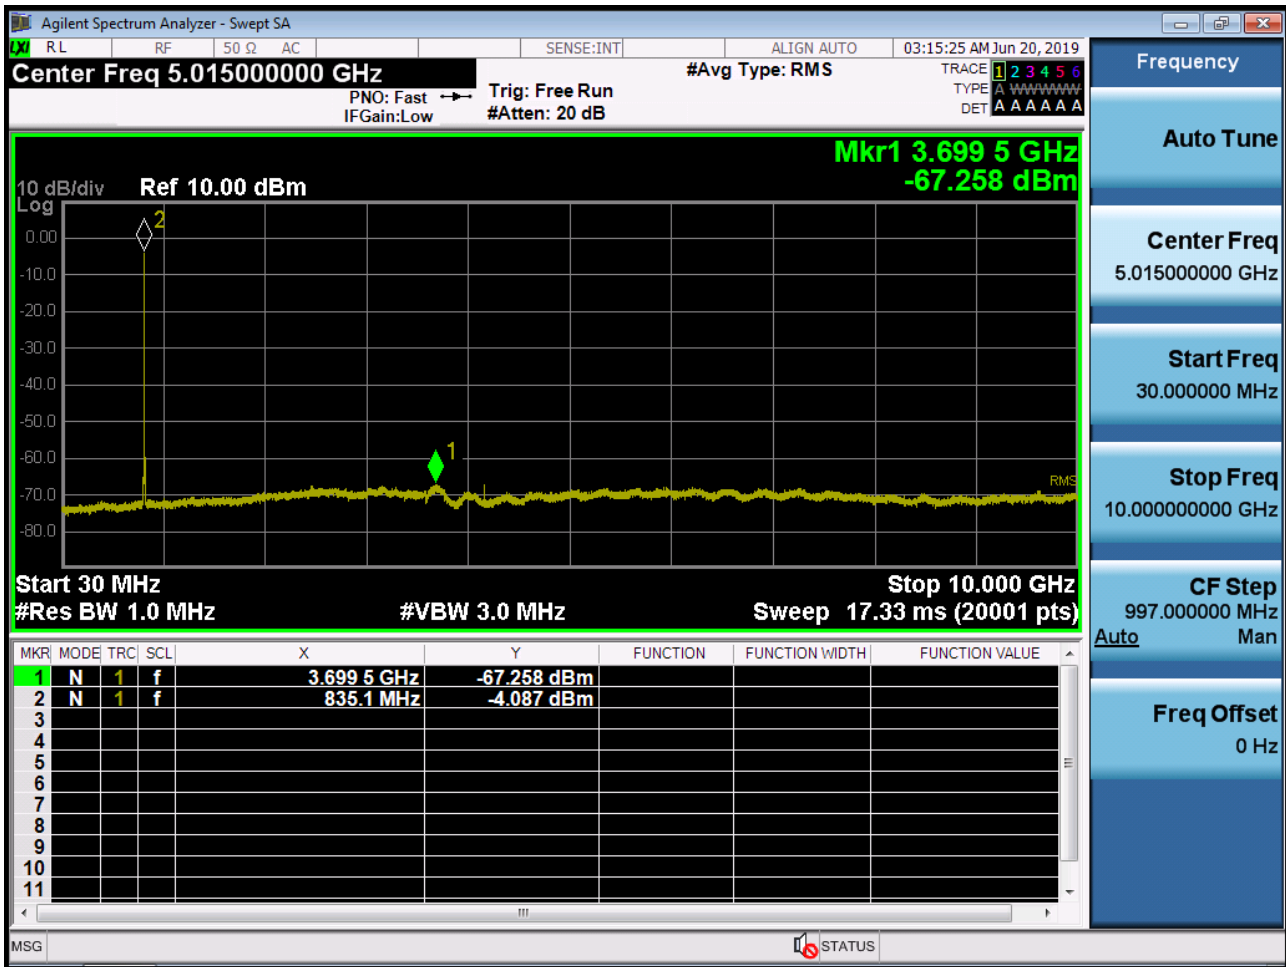


BAND5/ 26. Conducted Spurious Plot (27015ch_5MHz_QPSK_RB 1_0)

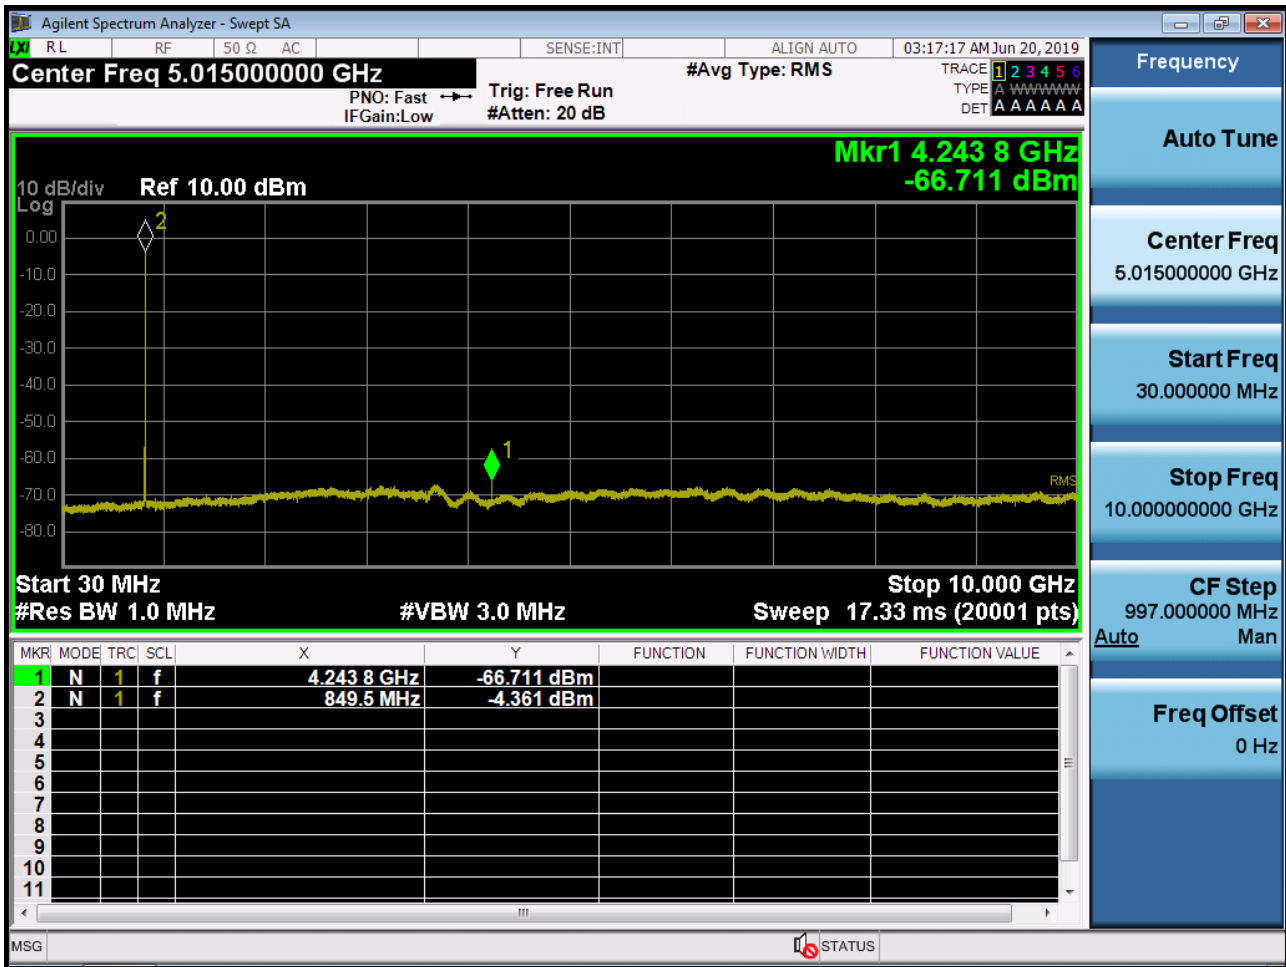


BAND5/ 26. Conducted Spurious Plot (26840ch_10MHz_QPSK_RB 1_0)

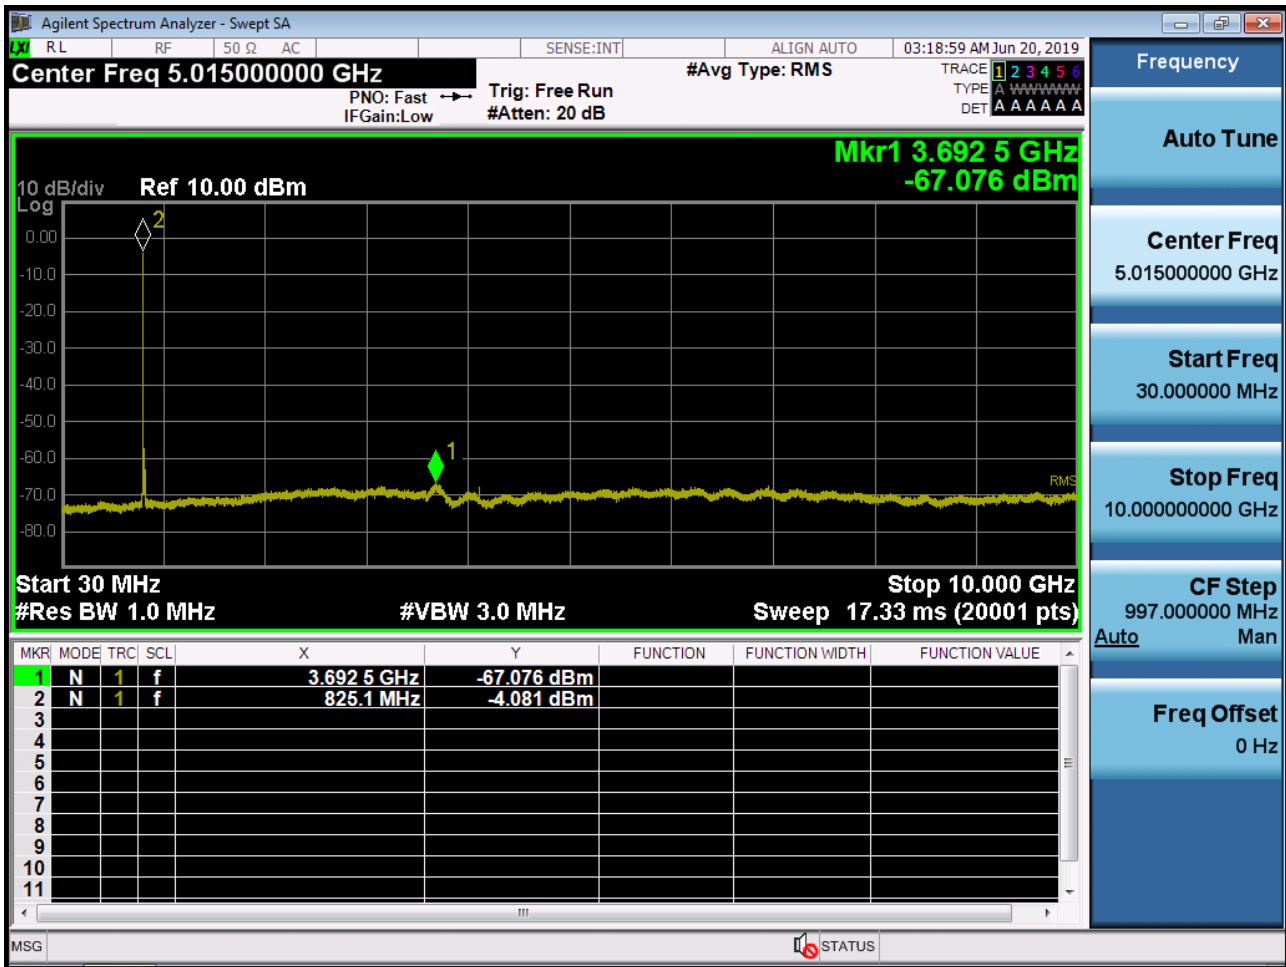


BAND5/ 26. Conducted Spurious Plot (26915ch_10MHz_QPSK_RB 1_0)

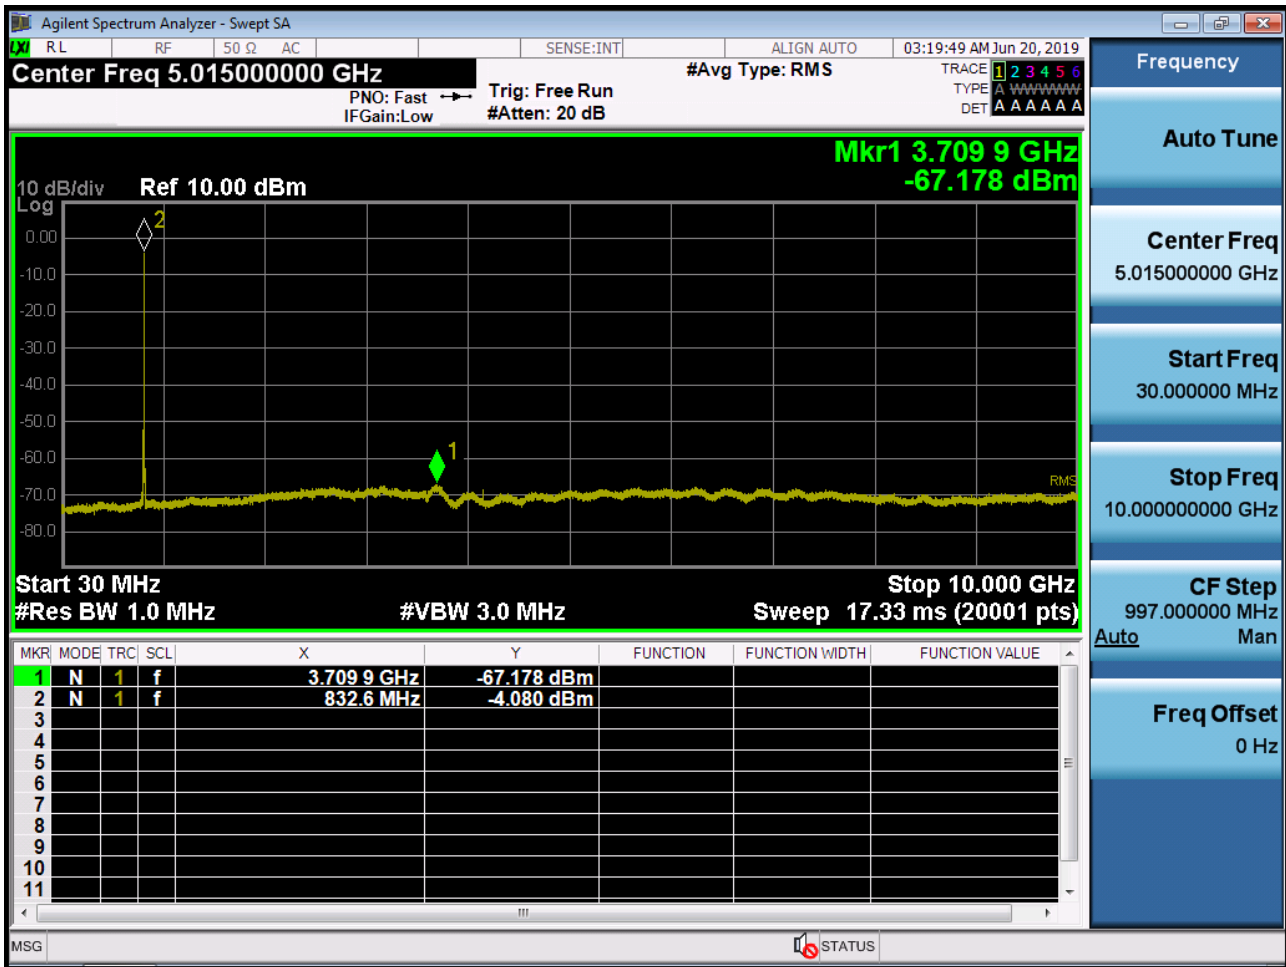


BAND5/ 26. Conducted Spurious Plot (26990ch_10MHz_QPSK_RB 1_0)

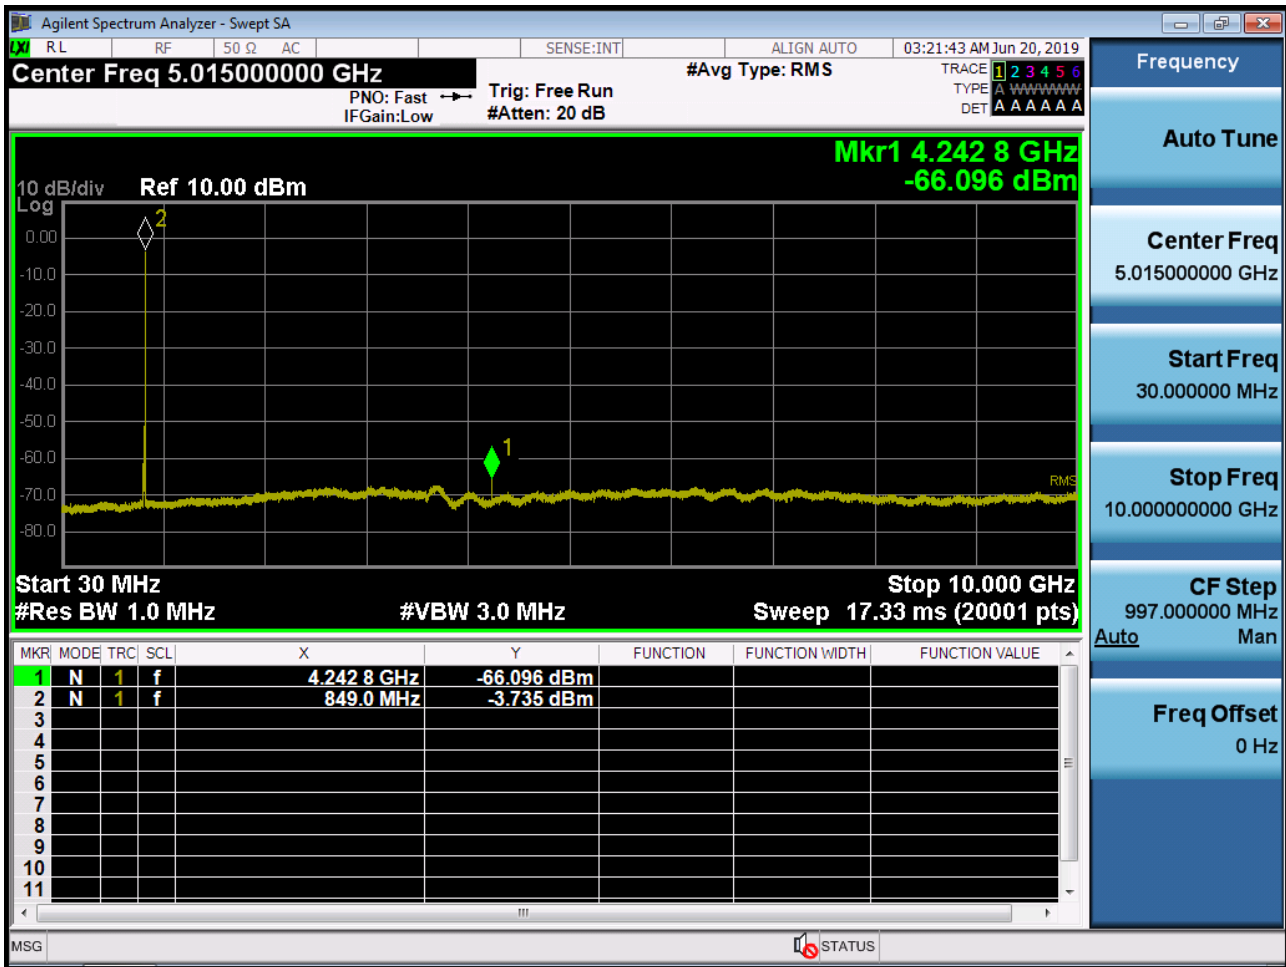


BAND 26. Conducted Spurious (26865ch_15MHz_QPSK_RB 1_0)

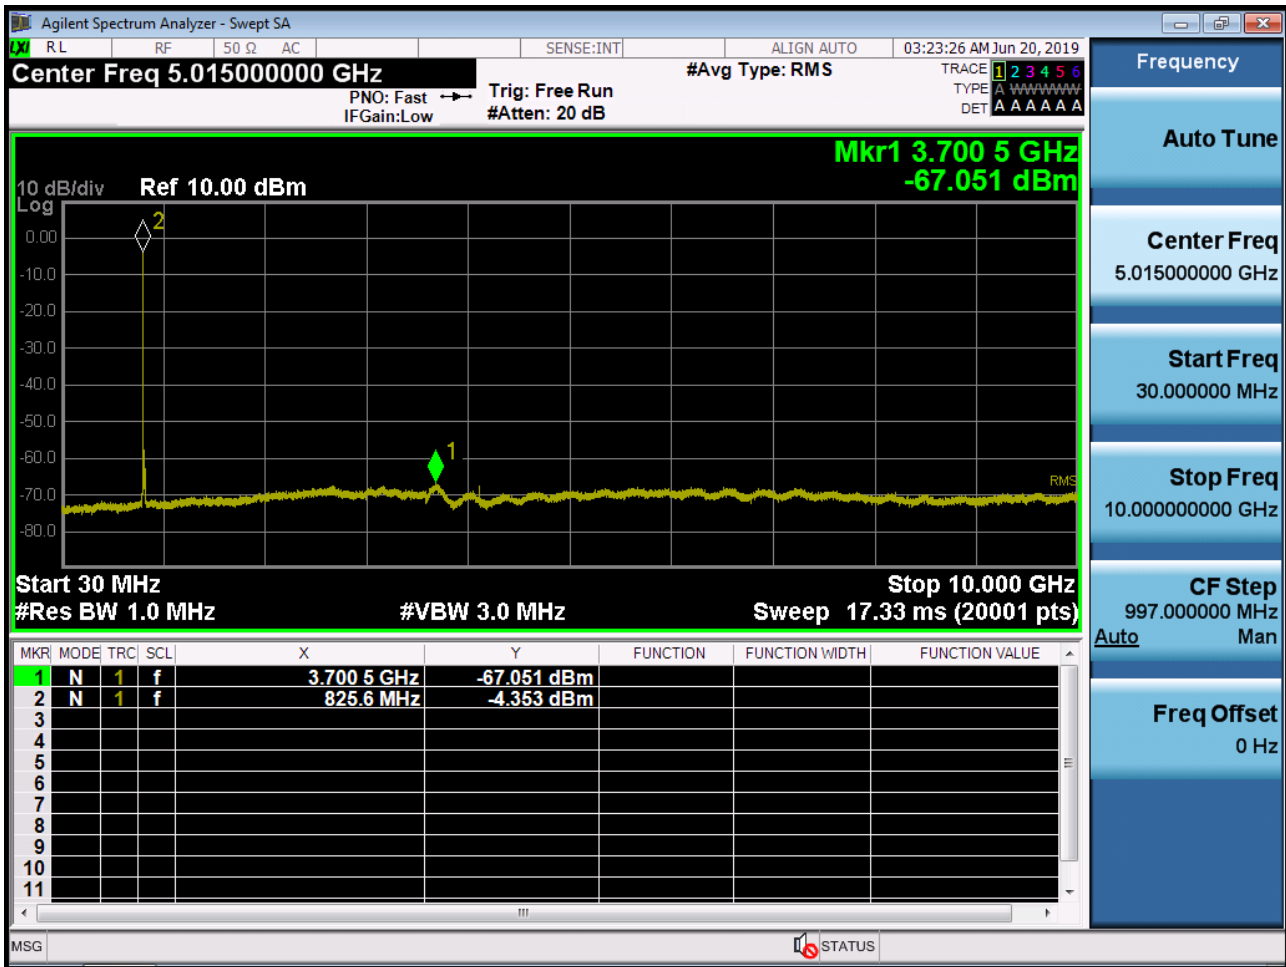

BAND 26. Conducted Spurious (26915ch_15MHz_QPSK_RB 1_0)

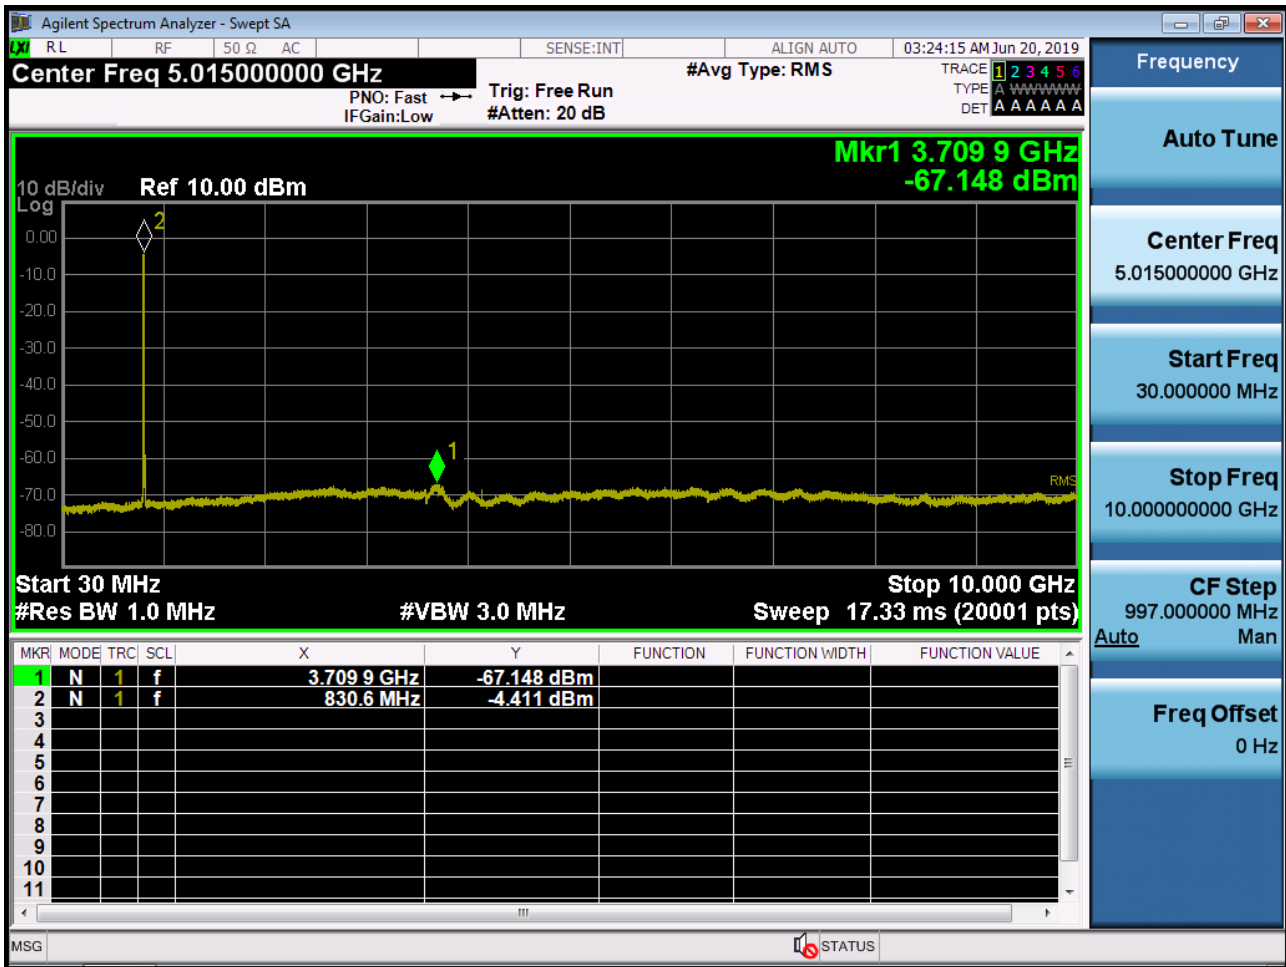

BAND 26. Conducted Spurious (26965ch_15MHz_QPSK_RB 1_0)

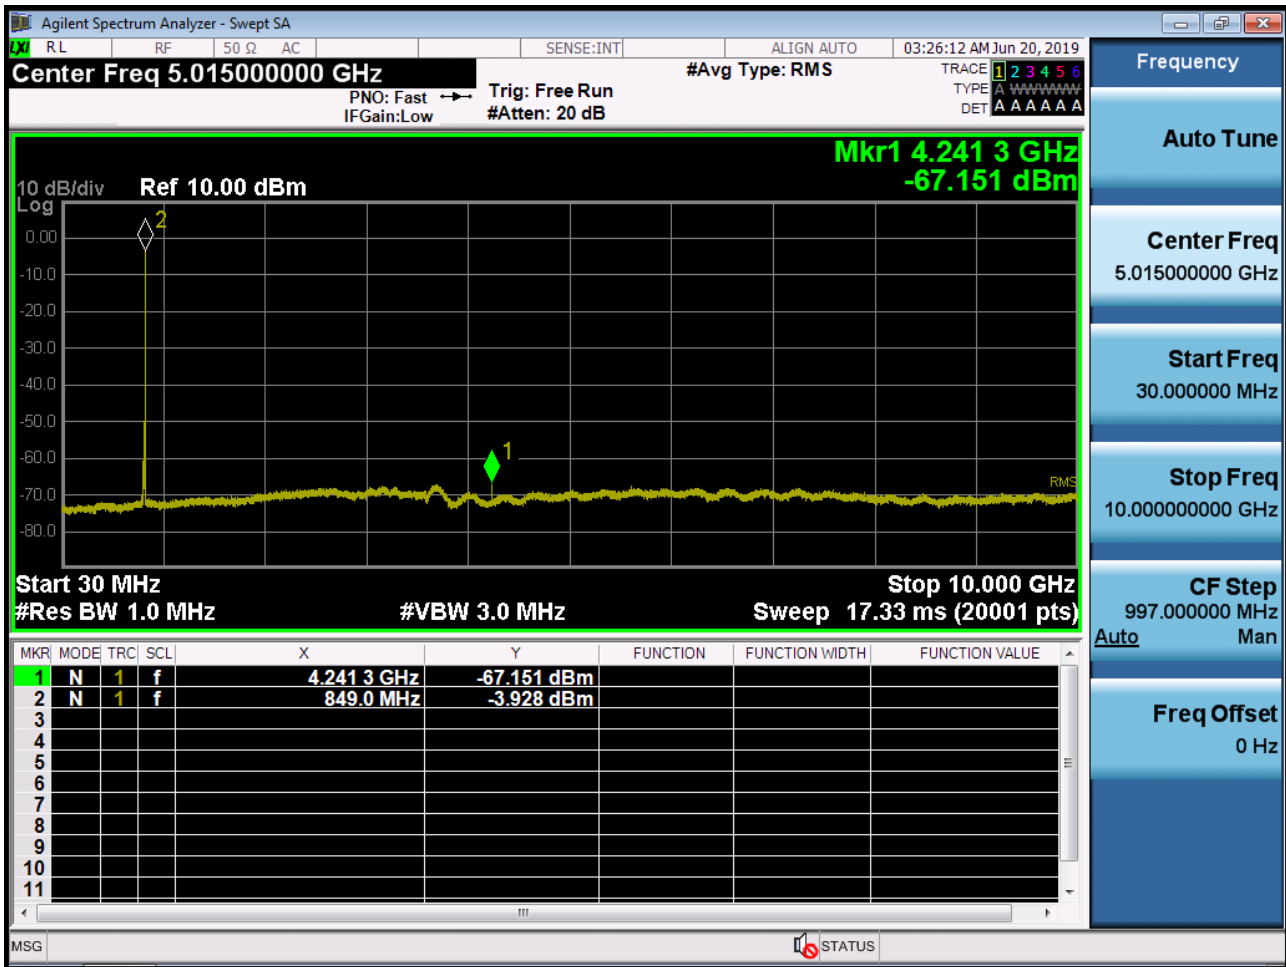

10. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1907-FI031-P