

RF Test Report

Bluetooth

Report No. : FCCBVCO-WAY-P21090032R3
Customer : Samsung Electronics Co., Ltd.
Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do,
16677, Korea
Use of Report : Certification
Model Name : SM-R885U (Alt. SM-R885F)
FCC ID (Model) : A3LSMR885 (SM-R885U, SM-R885F)
IC No. (Model) : 649E-SMR8851 (SM-R885F)
HVIN : SM-R885F1
Date of Test : 2021.09.23 to 2021.10.07
Test Method Used : FCC 47 CFR PART 15 Subpart C (Section §15.247) /
ISED RSS-247
Testing Environment : Refer to the Test Condition

Test Result : Pass Fail

ISSUED BY: BV CPS ADT Korea Ltd., EMC/RF Laboratory

ADDRESS: Innoplex No.2 106, Sinwon-ro 306, Yeongtong-gu,
Suwon-si, Gyeonggi-do, Korea 16675

TEST LOCATION: HeungAn-daero 49, DongAn-gu, Anyang-si,
Gyeonggi-do, Korea, 14119

Tested by

Name : David Jang



(Signature)

Technical Manager

Name : Jongha Choi



(Signature)

2021. 10. 25

BV CPS ADT Korea Ltd.

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



RELEASE CONTROL RECORD

REPORT NO.	REASON FOR CHANGE	DATE ISSUED
FCCBVCO-WAY-P21090032	Original release	2021.10.08
FCCBVCO-WAY-P21090032R1	Updated	2021.10.18
FCCBVCO-WAY-P21090032R2	Updated	2021.10.21
FCCBVCO-WAY-P21090032R3	Updated	2021.10.25

Table of Contents

RELEASE CONTROL RECORD	2
1 SUMMARY OF TEST RESULTS.....	5
1.1 DECISION RULES FOR STATEMENT OF CONFORMITY.....	6
1.2 MEASUREMENT UNCERTAINTY	6
2 GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODE	8
2.2.1 <i>Test Mode Applicability and Tested Channel Details</i>	9
2.3 MAXIMUM OUTPUT POWER.....	11
2.4 DUTY CYCLE OF TEST SIGNAL	11
2.5 20 DB AND 99 % BANDWIDTH.....	13
2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	18
2.7 TEST EQUIPMENT	19
3 TEST RESULTS	20
3.1 ANTENNA REQUIREMENT.....	20
3.2 MAXIMUM PEAK OUTPUT POWER.....	21
3.2.1 <i>Regulation</i>	21
3.2.2 <i>Test Procedure</i>	21
3.2.3 <i>Deviation from Test Standard</i>	23
3.2.4 <i>Test Setup</i>	23
3.2.5 <i>Test Result</i>	24
3.3 CARRIER FREQUENCY SEPARATION	27
3.3.1 <i>Regulation</i>	27
3.3.2 <i>Test Procedure</i>	27
3.3.3 <i>Deviation from Test Standard</i>	27
3.3.4 <i>Test Setup</i>	27
3.3.5 <i>Test Result</i>	28
3.4 NUMBER OF HOPPING CHANNELS	29
3.4.1 <i>Regulation</i>	29
3.4.2 <i>Test Procedure</i>	29
3.4.3 <i>Deviation from Test Standard</i>	29
3.4.4 <i>Test Setup</i>	30
3.4.5 <i>Test Result</i>	31
3.5 TIME OF OCCUPANCY (DWELL TIME)	32



3.5.1	Regulation.....	32
3.5.2	Test Procedure.....	32
3.5.3	Deviation from Test Standard.....	33
3.5.4	Test Setup.....	33
3.5.5	Test Result.....	33
3.6	SPURIOUS EMISSION, BAND EDGE AND RESTRICTED BANDS.....	38
3.6.1	Regulation.....	38
3.6.2	Test Procedure.....	39
3.6.3	Deviation from Test Standard.....	43
3.6.4	Test Setup.....	43
3.6.5	Test Result of Radiated Spurious Emission.....	46
3.6.6	Test Result of Conducted Spurious Emission.....	59
3.7	AC CONDUCTED EMISSIONS (150 KHZ TO 30 MHZ).....	65
3.7.1	Regulation.....	65
3.7.2	Test Procedure.....	65
3.7.3	Deviation from Test Standard.....	65
3.7.4	Test Setup.....	66
3.7.5	Test Result.....	67
APPENDIX – INFORMATION OF THE TESTING LABORATORIES.....		68

1 Summary of Test Results


The EUT has been tested according to the following specifications

Applied Standard : FCC Part 15, Subpart C 15.247, RSS-247					
FCC Part Section(s)	RSS Section(s)	Test Description	Limit	Test Result	Reference
15.247(b)(1)	RSS-247 [5.4(2)]	Maximum Peak Output Power	< 1 Watt if ≥ 75 non-overlapping channels used	PASS	Section 3.2
15.247(a)(1)	RSS-247 [5.1(2)]	Carrier Frequency Separation	> 2/3 of 20 dB BW for systems with Output Power < 125 mW	PASS	Section 3.3
15.247(a)(1)(iii)	RSS-247 [5.1(1)]	20 dB Channel Bandwidth	N/A	PASS	Section 2.5
-	-	Occupied Bandwidth (99 % Bandwidth)	N/A	PASS	Section 2.5
15.247(a)(1)(iii)	RSS-247 [5.1(4)]	Number of Hopping Channels	> 15 Channels	PASS	Section 3.4
15.247(a)(1)(iii)	RSS-247 [5.1(4)]	Time of Occupancy (Dwell Time)	< 0.4 sec in 31.6 sec period	PASS	Section 3.5
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions (Conducted Spurious Emission)	> 20 dBc	PASS	Section 3.6
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in Restricted bands must meet the radiated limits detailed in 15.209 (RSS-247 limits)	PASS	Section 3.6
15.207	RSS-Gen [8.8]	AC Conducted Emissions (150 kHz – 30 MHz)	< FCC 15.207 limits (RSS-Gen [8.8] limits)	PASS	Section 3.7

NOTES

- 1) The general test methods used to test on this devices are ANSI C63.10.
- 2) If The Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.
- 3) Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

1.1 Decision Rules for Statement of Conformity

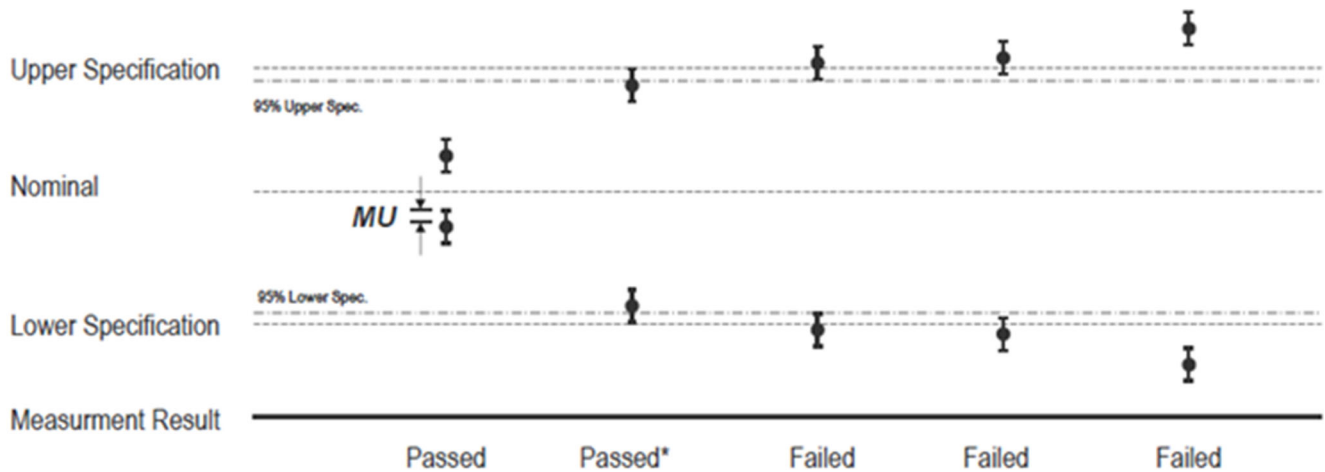

QUA-52 Decision Rule(QA Document) was applied.

Step 1) : Reference Check, Daily Check, Peripheral device Check

Step 2) : Re-test Procedure (Repeat the test maximum 3 times, Different Test Engineer)

- 1) If the original test results are subject to retesting and the judgement is unclear, the retest is carried out.
- 2) If the result of the first retest is the same as the initial test, the judgement is made based on the value.
- 3) If the result of the first retest differ from the results of the initial test, the second re-test is carried out.
- 4) After completion of the second retest, the average of the three test results is determined as the final result. However, if the deviation of the three test values is more than 5 % of the reference value, the technical manager should review the reproducibility of the test from the beginning.

1.2 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2

Measurement Items	Frequency Range	Expanded Uncertainty $U = kU_c (k = 2)$
Conducted Emissions at main ports	150 kHz – 30 MHz	2.99
Radiated Spurious Emissions	9 kHz – 30 MHz	1.92
	30 MHz – 1 GHz	4.00
	1 GHz – 18 GHz	5.68
	18 GHz – 26.5 GHz	5.24

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of $k = 2$.

2 General Information

2.1 General Description of EUT

Product	Smart Wearable
Brand	Samsung
Model	SM-R885U (Alt. SM-R885F) for FCC ID : A3LSMR885
Identification No. of EUT	-
Series Model	SM-R885F for IC No. : 649E-SMR8851
HVIN	SM-R885F1
Model Difference	-
Power Supply	DC 3.88 V
Modulation Type	GFSK, $\pi/4$ DQPSK, 8DPSK
Transfer Rate	1 Mbps(BDR) / 2 Mbps, 3 Mbps(EDR)
Operating Frequency	2 402 to 2 480 MHz
Number of Channel	79 Channels
Output Power	16.78 dBm (47.64 mW)
Antenna Type	LDS Antenna
Antenna Connector	Internal
H/W Version	REV1.0
S/W Version	R885U.001(SM-R885U), R885F.001(SM-R885F)
Test device Information	Model : SM-R885U Serial number - Conducted(410005bee4b248ad, 41000596e4f648df), Radiated(R3AR500TZJZ, T3AR404RNSP, R3AR500TZBK, R3AR500TZ5R

NOTES

- 1) The above equipment has been tested by **Bureau Veritas Consumer Products Services ADT Korea**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.
- 2) The following antennas were provided to the EUT

Antenna	Type	Connector	Peak Gain (dBi)				
			2.4 GHz	U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
Bluetooth/ Wi-Fi	LDS Antenna	Internal	-5.1	-4.1	-5.9	-6.7	-5.0



3) Spurious emission of the simultaneous operation and the test data please refer to report no. FCCBVCO-WAY-P21090032-4 (U-NII Test Report).

4) List of Accessories

Accessories	Brand	Model	Manufacturer	Specification
Wireless Charger	Samsung	EP-OR825	Samsung	FCC ID : A3LEPOR825/ IC : 649E-EPOR825

2.2 Description of Test Mode

[Test Channel of EUT]

- Bluetooth BDR/EDR

Channel	Frequency [MHz]	Channel	Frequency [MHz]	Channel	Frequency [MHz]	Channel	Frequency [MHz]
0	2 402	20	2 422	40	2 442	60	2 462
1	2 403	21	2 423	41	2 443	61	2 463
2	2 404	22	2 424	42	2 444	62	2 464
3	2 405	23	2 425	43	2 445	63	2 465
4	2 406	24	2 426	44	2 446	64	2 466
5	2 407	25	2 427	45	2 447	65	2 467
6	2 408	26	2 428	46	2 448	66	2 468
7	2 409	27	2 429	47	2 449	67	2 469
8	2 410	28	2 430	48	2 450	68	2 470
9	2 411	29	2 431	49	2 451	69	2 471
10	2 412	30	2 432	50	2 452	70	2 472
11	2 413	31	2 433	51	2 453	71	2 473
12	2 414	32	2 434	52	2 454	72	2 474
13	2 415	33	2 435	53	2 455	73	2 475
14	2 416	34	2 436	54	2 456	74	2 476
15	2 417	35	2 437	55	2 457	75	2 477
16	2 418	36	2 438	56	2 458	76	2 478
17	2 419	37	2 439	57	2 459	77	2 479
18	2 420	38	2 440	58	2 460	78	2 480
19	2 421	39	2 441	59	2 461		

2.2.1 Test Mode Applicability and Tested Channel Details

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. All Radiated emission tests have been performed two mode(with charger and without charger). The worst case was found when positioned on Y axis and without charger mode for radiated emission. Following channel(s) was(were) selected for the final test as listed below :

EUT Configure mode	Applicable to				Description
	RE < 1G	RE ≥ 1G	PLC	APCM	
Without Charger	√	√	-	√	-
With Charger	-	-	√	-	-

Where RE ≥ 1 G : Radiated Emission above 1 GHz & Bandedge Measurement
 RE < 1 G : Radiated Emission below 1 GHz
 PLC : Power Line Conducted Emission
 APCM : Antenna Port Conducted Measurement

Radiated Emission Test (Below 1 GHz)

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type	Packet Type
0 to 78	0	GFSK	DH1

NOTES

According to exploratory test no any obvious emission were detected from 9 khz to 30 MHz.
 Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Radiated Emission Test (Above 1 GHz)

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type	Packet Type
0 to 78	0, 39, 78	GFSK	DH1
0 to 78	0, 39, 78	8DPSK	3-DH1

Radiated Emission Test (Above 18 GHz)

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type	Packet Type
0 to 78	0	GFSK	DH1

Power line Conducted Emission Test

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type	Packet Type
0 to 78	0	GFSK	DH1

Antenna Port Conducted Measurement

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type	Packet Type
0 to 78	0, 39, 78	GFSK	ALL
0 to 78	0, 39, 78	$\pi/4$ DQPSK	ALL
0 to 78	0, 39, 78	8DPSK	ALL

Test Condition

Applicable to	Environmental Conditions	Test Voltage	Tested by
RE < 1G	23 °C, 49 % RH	DC 3.88 V	David Jang
RE ≥ 1G	23 °C, 51 % RH	DC 3.88 V	David Jang
PLC	22 °C, 48 % RH	DC 3.88 V	David Jang
APCM	23 °C, 50 % RH	DC 3.88 V	David Jang

2.3 Maximum Output Power


Frequency Range [MHz]	Test Items	Test Mode	Result [dBm]	Result [mW]
2 402 - 2 480	Average Power	BDR(GFSK)	15.88	38.69
		EDR(π /4DQPSK)	8.08	6.43
		EDR(8DPSK)	8.29	6.74
	Peak Power	BDR(GFSK)	16.78	47.64
		EDR(π /4DQPSK)	9.14	8.20
		EDR(8DPSK)	9.06	8.05

2.4 Duty Cycle of Test Signal

Test Mode	Test Items	Packet Type	On Time B [msec]	Period [msec]	Duty Cycle X [Linear]	Duty Cycle [%]	DCF [dB]
BDR(GFSK)	Duty Cycle	DH1	0.388	1.253	0.310	31.0	5.09
EDR(π /4DQPSK)	Duty Cycle	2DH1	0.391	1.251	0.313	31.3	5.05
EDR(8DPSK)	Duty Cycle	3DH1	0.386	1.249	0.309	30.9	5.10



Test Plot of Duty Cycle

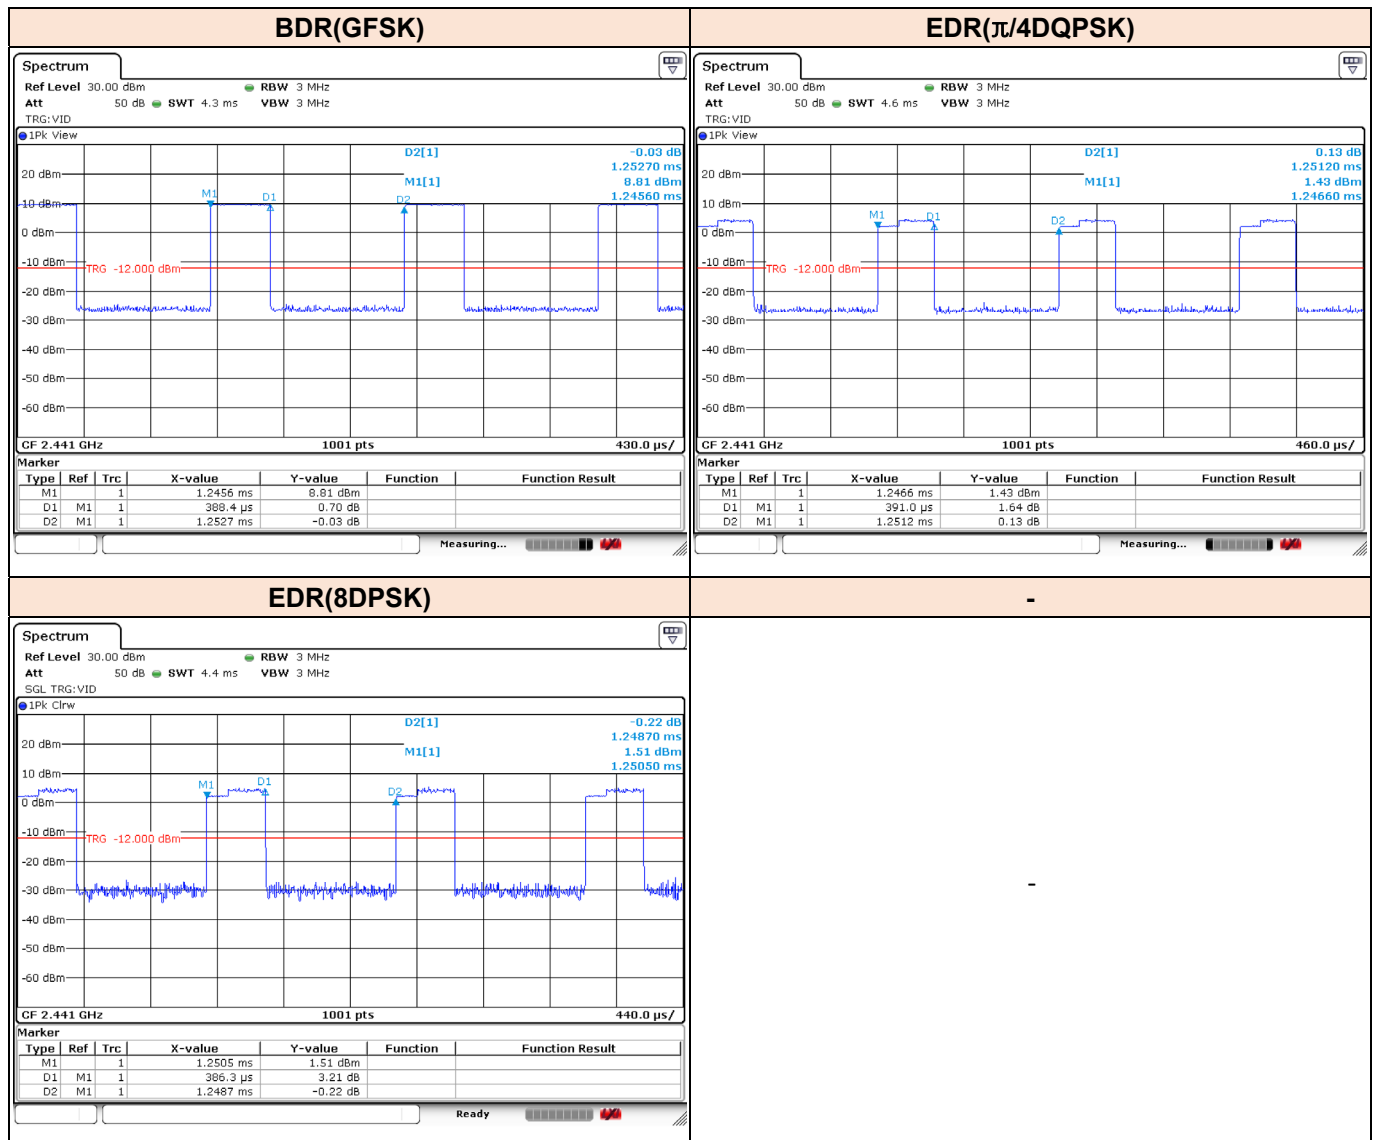


2.5 20 dB and 99 % Bandwidth

[Test Data of 20 dB Bandwidth and 99 % Bandwidth]

Test Mode	Channel	Frequency [MHz]	20 dB BW [MHz]	99 BW [MHz]
BDR(GFSK)	Lowest	2 402	0.974	0.923
	Middle	2 441	0.977	0.944
	Highest	2 480	0.977	0.929
Worst Result			0.977	0.944
EDR(π /4DQPSK)	Lowest	2 402	1.346	1.196
	Middle	2 441	1.346	1.187
	Highest	2 480	1.349	1.184
Worst Result			1.349	1.196
EDR(8DPSK)	Lowest	2 402	1.289	1.181
	Middle	2 441	1.289	1.181
	Highest	2 480	1.292	1.172
Worst Result			1.292	1.181



Test Plot of 20 dB Bandwidth


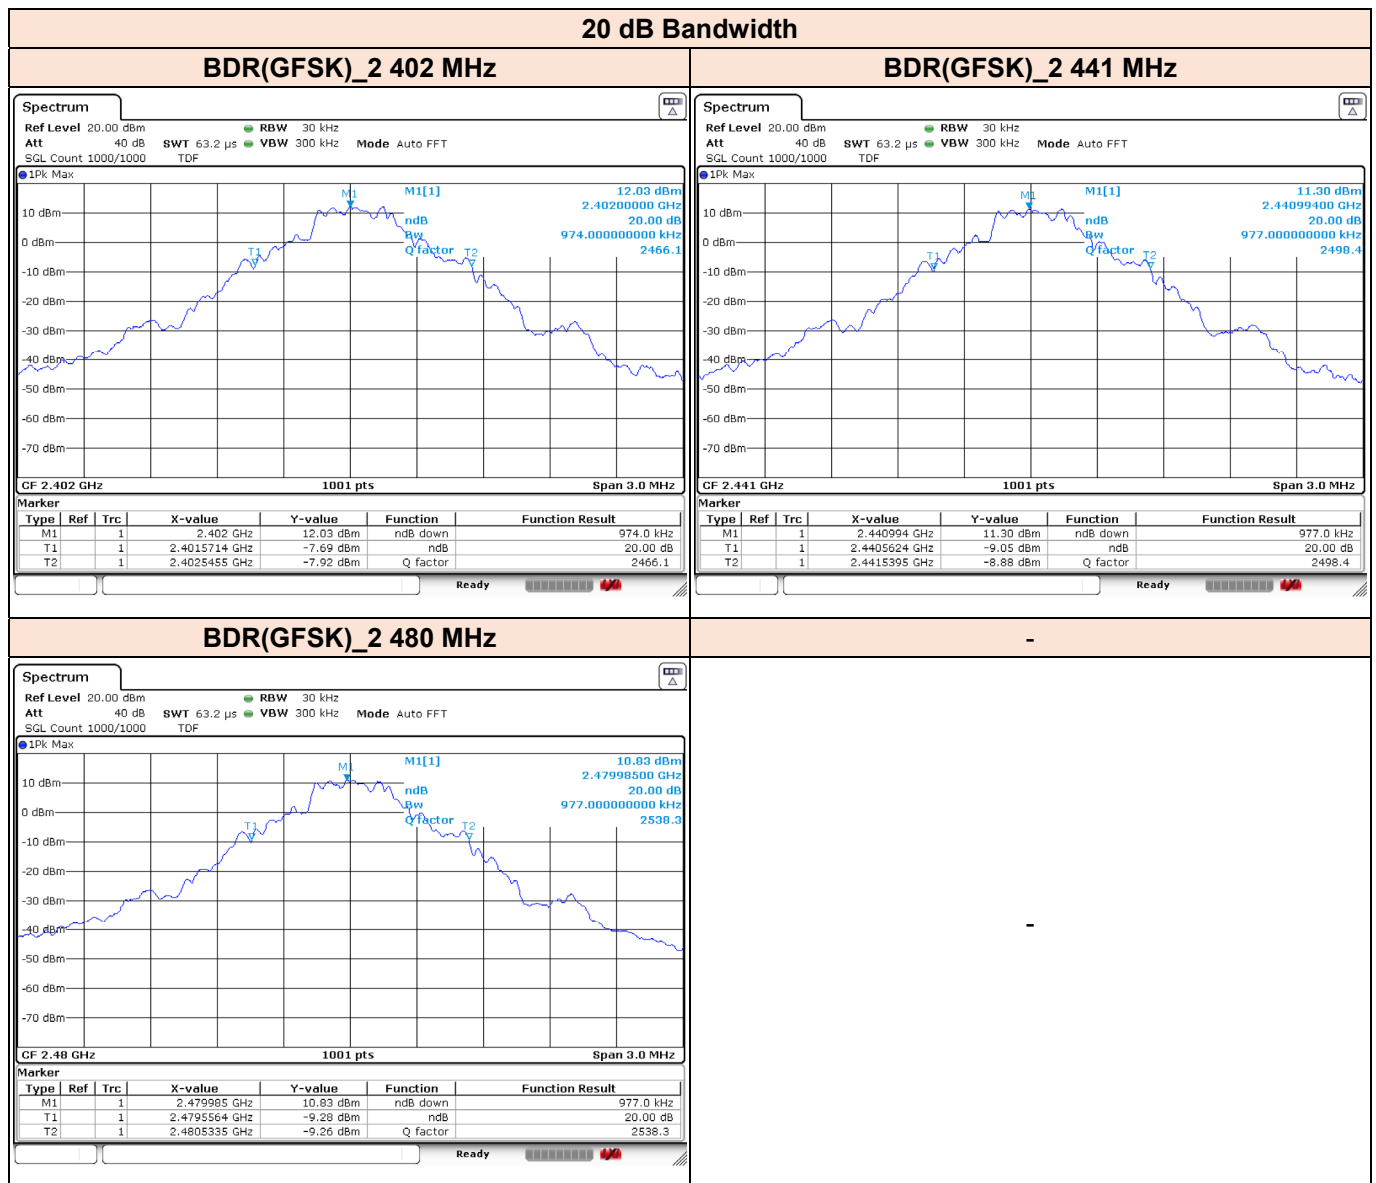




20 dB Bandwidth



EDR(π /4DQPSK)_2 402 MHz

EDR(8DPSK)_2 402 MHz

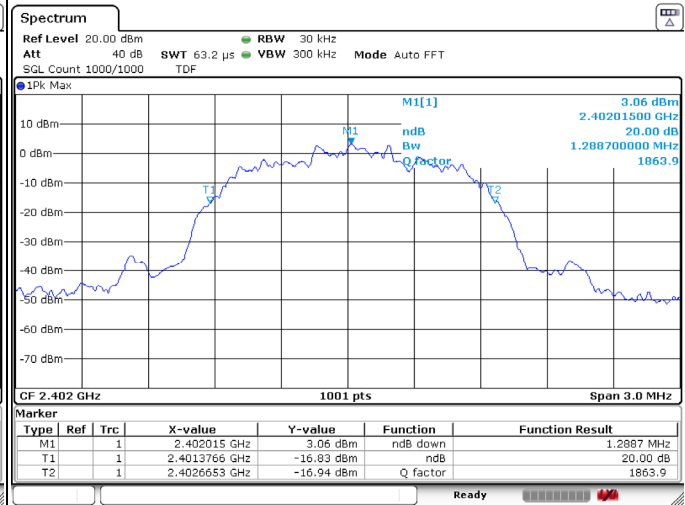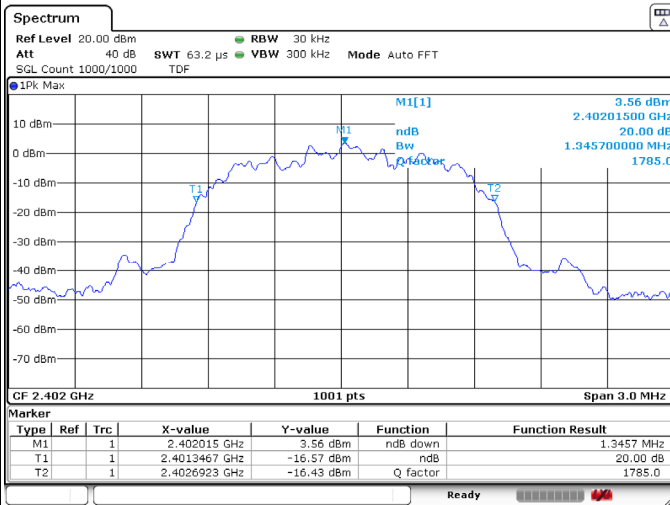



EDR(π /4DQPSK)_2 441 MHz

EDR(8DPSK)_2 441 MHz

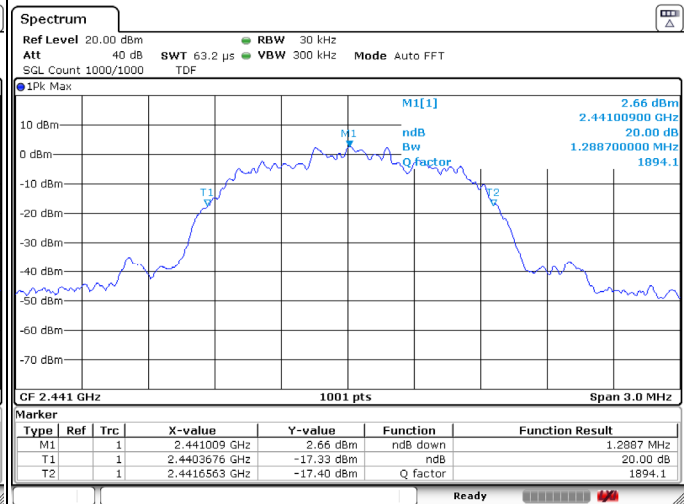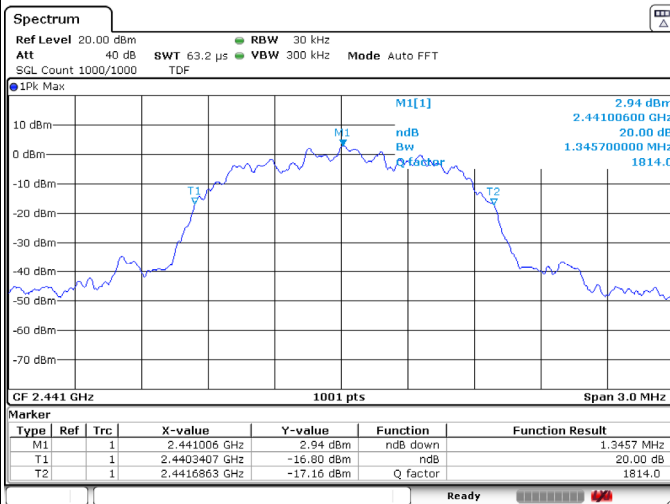


EDR(π /4DQPSK)_2 480 MHz

EDR(8DPSK)_2 480 MHz

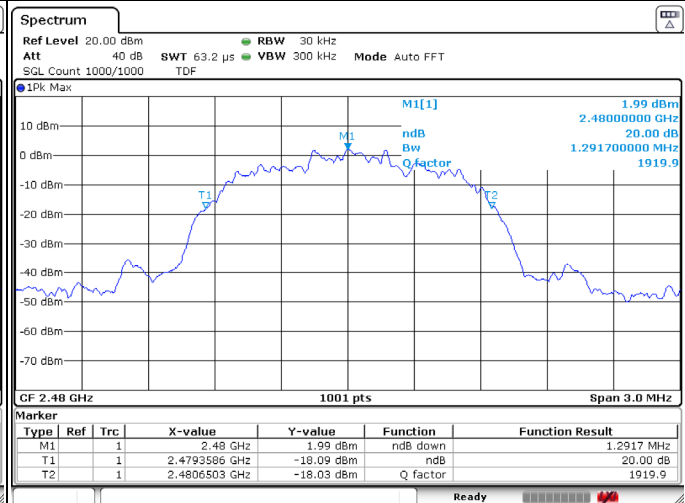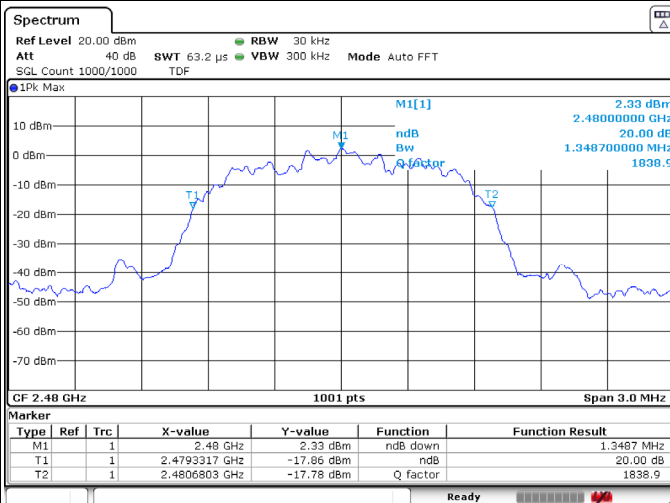



Test Plot of 99 % Bandwidth

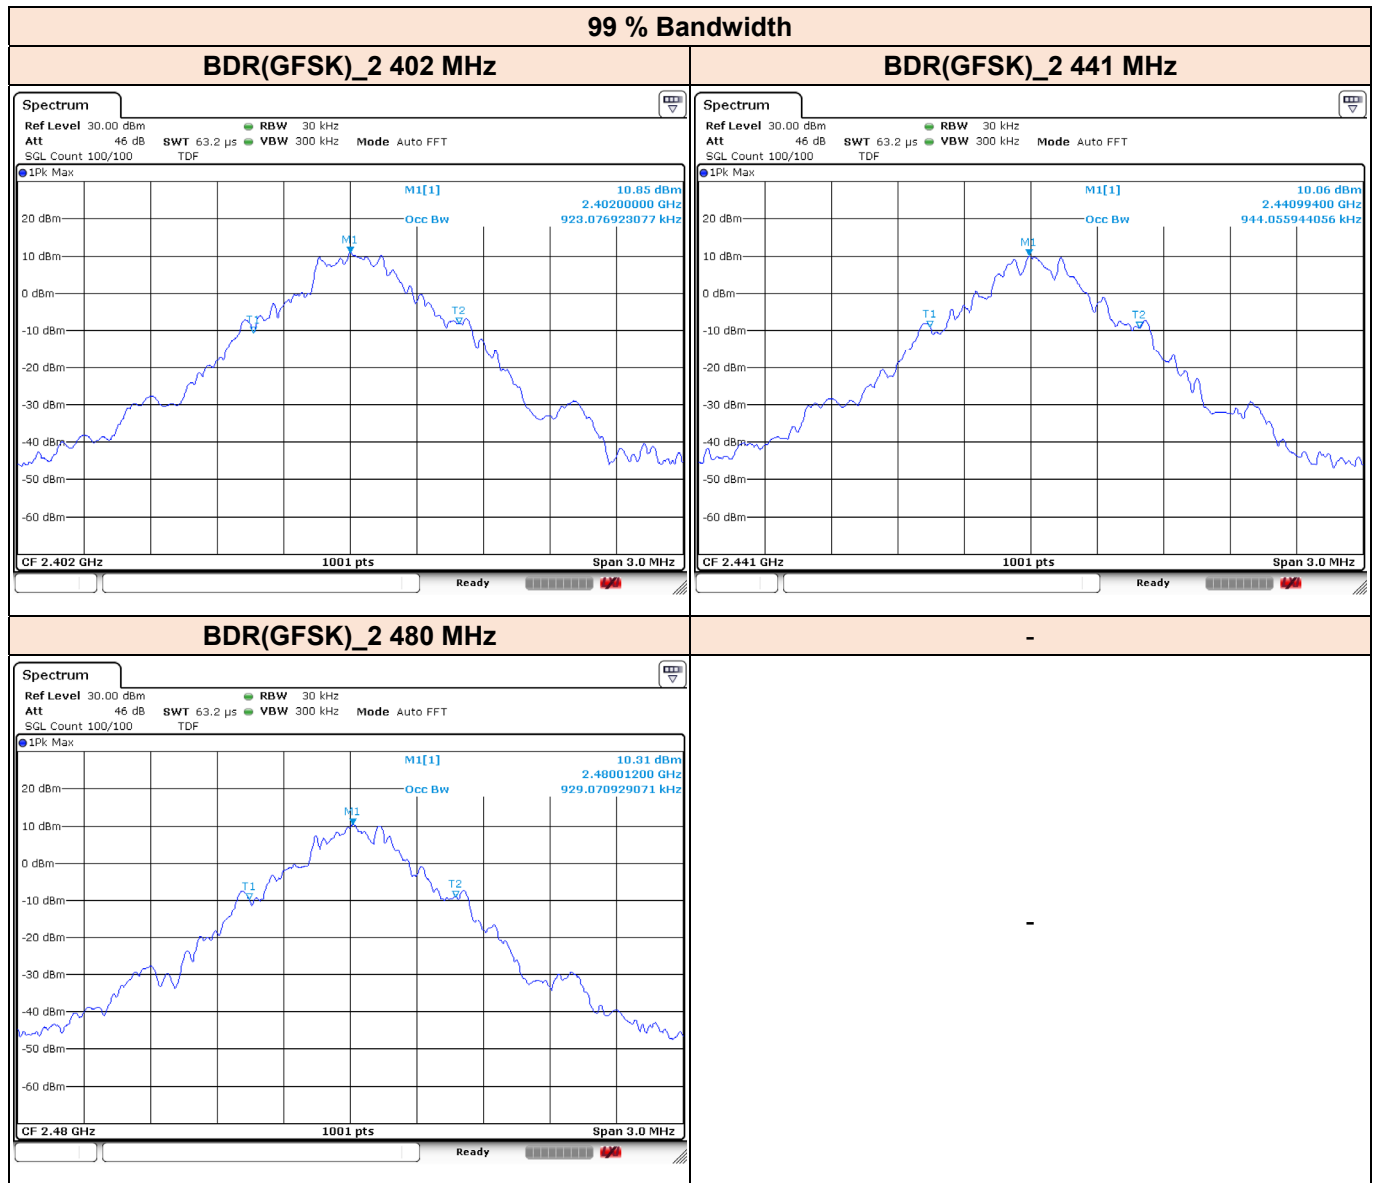





BUREAU
VERITAS

99 % Bandwidth



EDR(π /4DQPSK)_2 402 MHz

EDR(8DPSK)_2 402 MHz

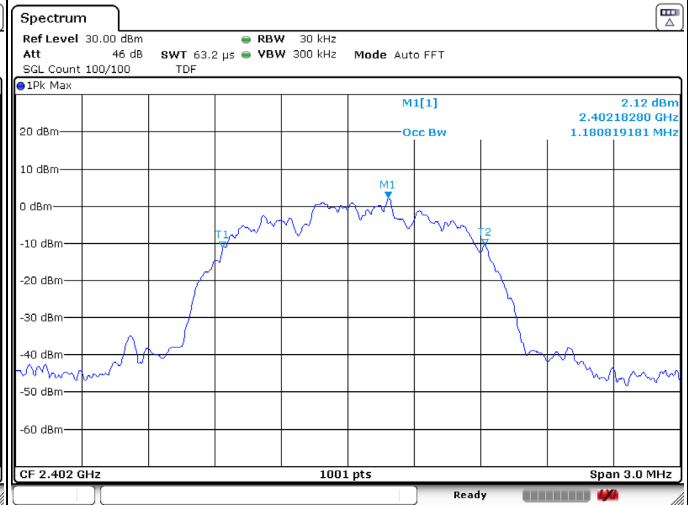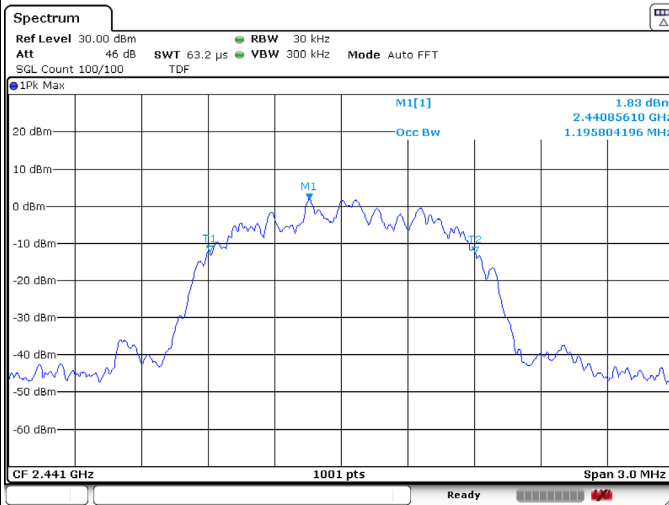



EDR(π /4DQPSK)_2 441 MHz

EDR(8DPSK)_2 441 MHz

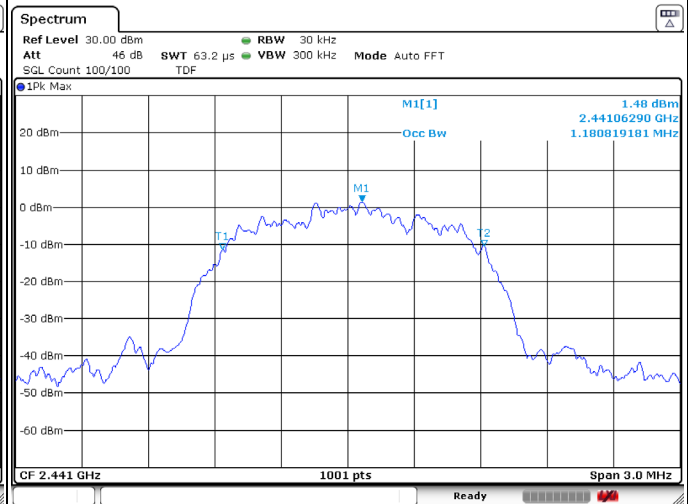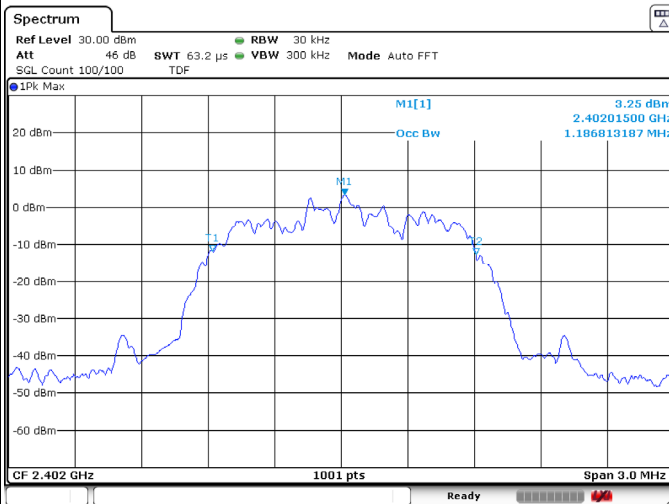

EDR(π /4DQPSK)_2 480 MHz

EDR(8DPSK)_2 480 MHz

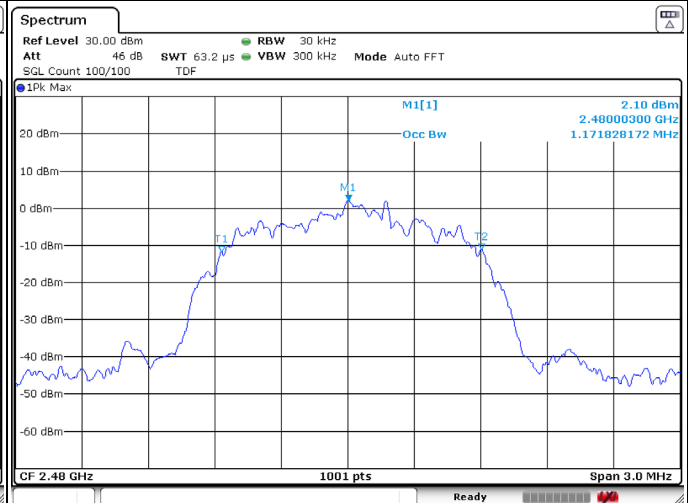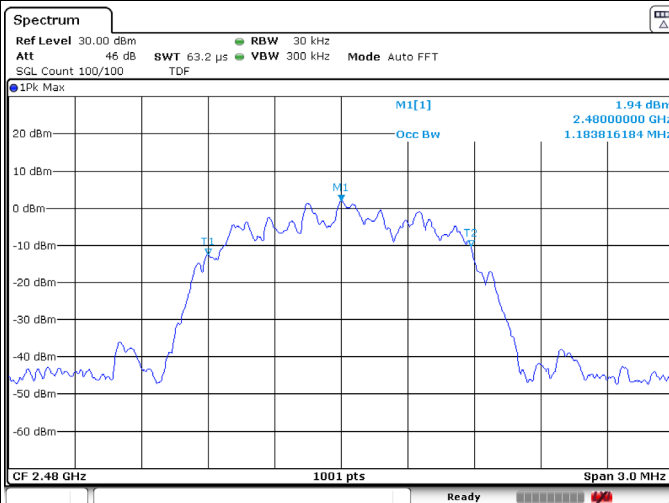

2.6 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards.

FCC CFR 47 Part 15, Subpart C (§15.247)

KDB 558074 D01 15.247 Meas Guidance v05r02

ANSI C63.10-2013

RSS-247 Issue 2

RSS-GEN Issue 5

All test items in this test report have been performed and recorded as per the above standards.



2.7 Test Equipment

Test Equipment is traceable to the National Institute of Standards and Technology (NIST). Measurement antenna used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Serial Number	Cal Date	Cal Due
R&S	HFH2-Z2E	Active Loop Antenna, 30 MHz	349806	2021.02.18	2023.02.18
Schwarzbeck	VULB 9163	Trilog Antenna, 3 GHz (with 6 dB ATT.)	01199	2021.02.22	2023.02.22
Schwarzbeck	VUBA 9117	30 MHz ~ 1 GHz	403	2020.01.09	2022.01.09
R&S	HF907	Horn Antenna, 18 GHz	102772	2020.12.09	2021.12.09
R&S	SCU08F2	Signal Conditioning Unit, 8 GHz	08400016	2020.12.09	2021.12.09
R&S	SCU-18F	Signal Conditioning Unit, 18 GHz	180111	2020.12.09	2021.12.09
Schwarzbeck	BBHA9170	15 - 40 GHz, 10 W (cont.) 25 W (peak)	00955	2020.12.09	2021.12.09
L3 Narda-MITEQ	JS44-18004000-33- 8P	Amplifier, 40 GHz	2142086	2021.01.05	2022.01.05
R&S	FSW50	DC Coupled : 2 Hz to 50 GHz AC Coupled : 10 MHz to 50 GHz	101403	2020.12.09	2021.12.09
R&S	ESW44	EMI Test Receiver, 44 GHz	101812	2020.12.09	2021.12.09
R&S	FSV30	Spectrum Analyzer, 30 GHz	103017	2020.12.07	2021.12.07
Aeroflex	40AH2W-3	Attenuator, 3 dB	1	2020.12.24	2021.12.24
Mini-Circuits	VAT-10W2+	Attenuator, 10 dB	1531	2020.12.08	2021.12.08
Pasternack	PE7087-10	10 dB Atten / 2 W / DC to 26 GHz	1712-2	2021.06.04	2022.06.04
Aeroflex	40AH2W-10	Attenuator, 10 dB	1	2021.06.04	2022.06.01
Micro-Tronics	HPM17543	High Pass Filter 3 GHz	028	2021.06.04	2022.06.04
R&S	NRP6A	Average Power Sensor	102045	2020.12.07	2021.12.07
R&S	NRP6A	Average Power Sensor	102044	2020.12.07	2021.12.07
R&S	NRX	Power Meter, 110 GHz	100947	2020.12.07	2021.12.07
Keysight Technologies	MP400B	MIMO Power Set Master, 18 GHz	None	2020.12.31	2021.12.31
R&S	ENV216	LISN	102437	2020.12.08	2021.12.08
R&S	ESR	EMI Test Receiver, 3.6 GHz	102529	2020.12.08	2021.12.08
Tescom	TC-3000C	Bluetooth Tester	3000C000461	2020.12.07	2021.12.07
Weinschel	1579	Power Splitter	71667	2021.01.04	2022.01.04

3 Test Results

3.1 Antenna Requirement

Except from §15.203 of the FCC Rules/Regulations:

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of the section.

- The antenna(s) of the EUT are Permanently attached.
- There are no provisions for connection to an external antenna.

Result

The EUT complies with the requirement of §15.203

3.2 Maximum Peak Output Power

3.2.1 Regulation

§15.247(a)(1) : Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

§15.247(b)(1) : For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

§15.247(b)(4) : The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Test Procedure

The method of measurement used to test this FHSS device is ANSI C63.10-2013.

This is an RF conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation.

- a) Use the following spectrum analyzer settings:

Peak Power Measurement

- 1) Span : Approximately five times the 20 dB bandwidth, centered on hopping channel.
 - 2) RBW > 20 dB bandwidth of emission being measured.
 - 3) VBW \geq RBW.
 - 4) Sweep : Auto.
 - 5) Detector function : Peak.
 - 6) Trace : Max hold.
- b) Allow trace to stabilize
 - c) Use the marker-to-peak function to set the marker to the peak of the emissions
 - d) The indicated level is the peak output power, after any corrections for external attenuators and cables.
 - e) A plot of the test results and setup description shall be included in the test report.

Average Power Measurement

Measurement using a power meter.

a) Average Power measurement using an RF average power meter, as follows:

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

b) If the transmitter does not transmit continuously, measure the duty cycle, D, of the transmitter output signal.

c) Measure the average power of the transmitter.

This measurement is an average over both the ON and OFF periods of the transmitter.


d) Correct the measurement in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle.

Please refer D value at page 11 2.4 Duty cycle of test signal.


3.2.3 Deviation from Test Standard

No deviation.

3.2.4 Test Setup

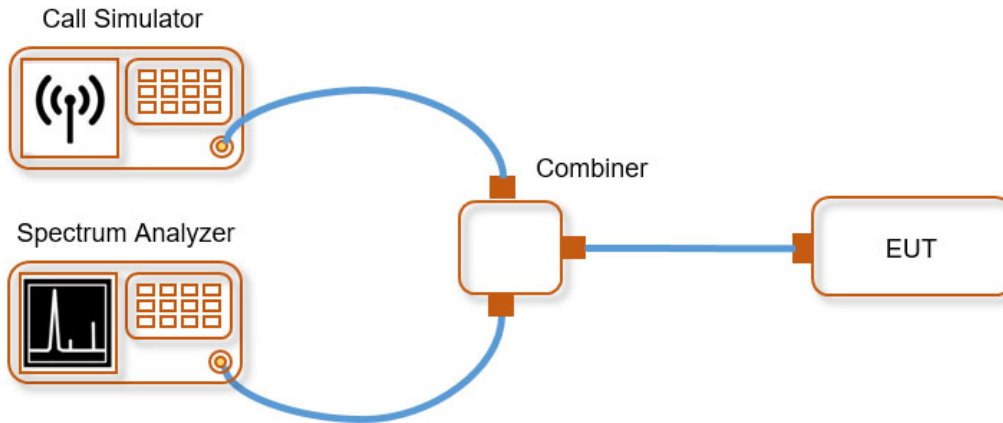

[Peak Power Measurement]

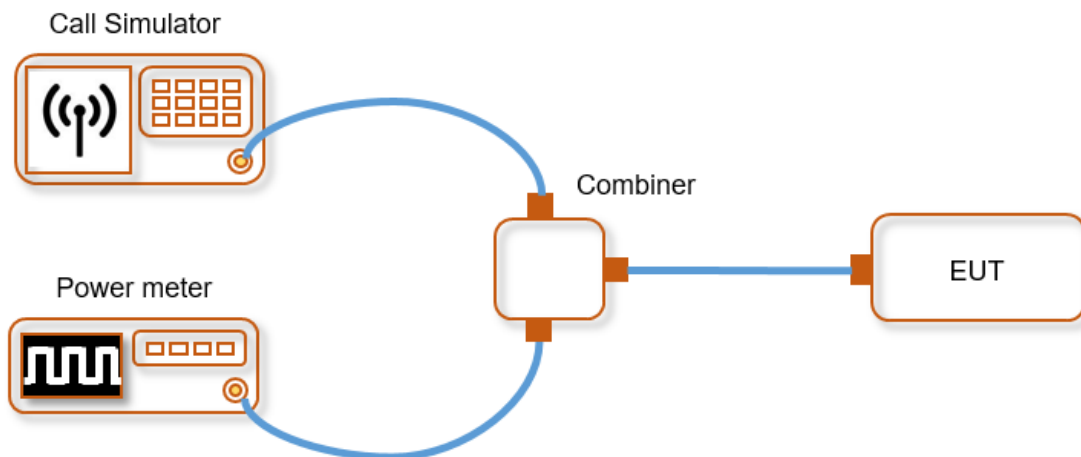

[Average Power Measurement]

3.2.5 Test Result

[Test Data of Peak Power]

Test Mode	Channel	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin [dB]
BDR (GFSK)	Lowest	2 402	16.78	21.00	4.22
	Middle	2 441	16.29	21.00	4.71
	Highest	2 480	15.86	21.00	5.14
Worst Result			16.78	21.00	4.22
EDR ($\pi/4$ DQPSK)	Lowest	2 402	11.58	21.00	9.42
	Middle	2 441	11.69	21.00	9.31
	Highest	2 480	10.22	21.00	10.78
Worst Result			11.69	21.00	9.31
EDR (8DPSK)	Lowest	2 402	12.09	21.00	8.91
	Middle	2 441	11.22	21.00	9.78
	Highest	2 480	10.68	21.00	10.32
Worst Result			12.09	21.00	8.91

[Test Data of Average Power]


Test Mode	Channel	Frequency [MHz]	Average Power [dBm]	Average Power [mW]
BDR (GFSK)	Lowest	2 402	15.88	38.69
	Middle	2 441	15.53	35.69
	Highest	2 480	15.00	31.59
EDR ($\pi/4$ DQPSK)	Lowest	2 402	8.08	6.43
	Middle	2 441	7.84	6.08
	Highest	2 480	7.09	5.12
EDR (8DPSK)	Lowest	2 402	8.29	6.74
	Middle	2 441	7.65	5.81
	Highest	2 480	6.93	4.93

Remarks

1. Peak Power(dBm) = Peak Reading Value(dB μ V/m)
2. Average Power(dBm) = Average Reading Value(dB μ V/m) + Duty Cycle Correction Factor(dB)



[Test Plot of Peak Power]


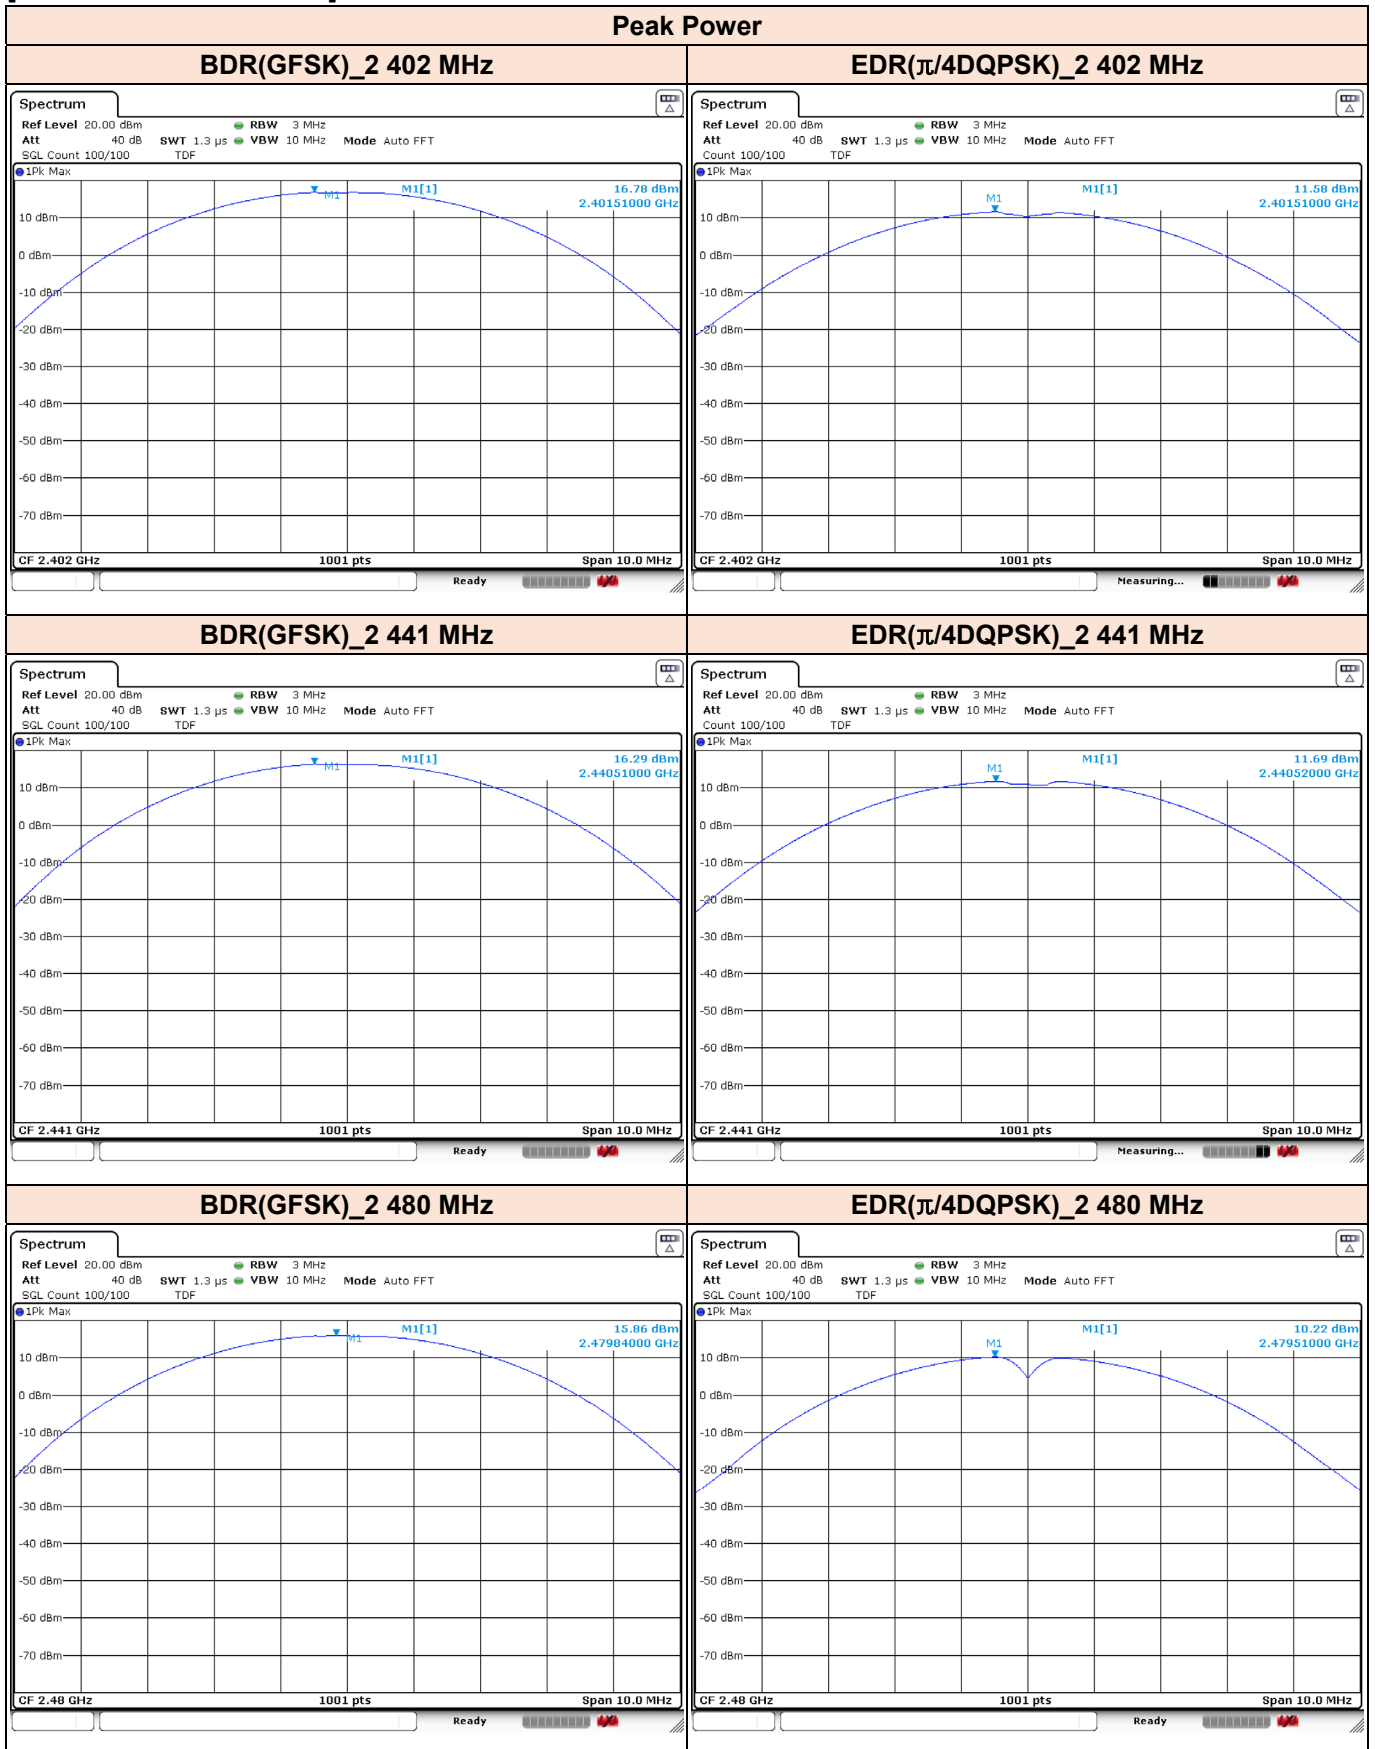






Peak Power

EDR(8DPSK)_2 402 MHz

EDR(8DPSK)_2 441 MHz

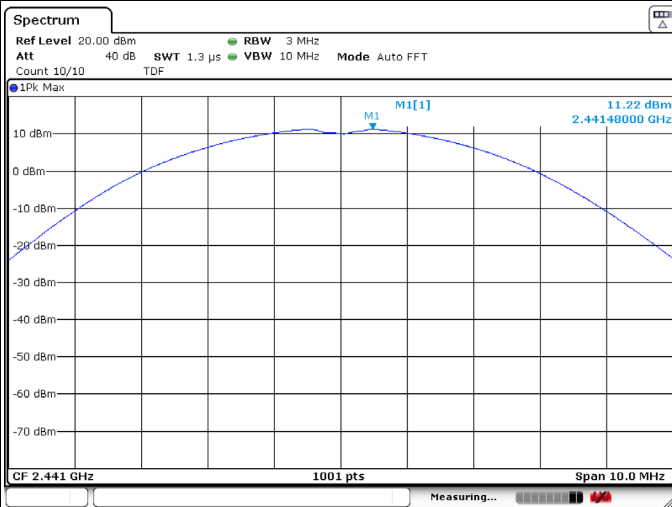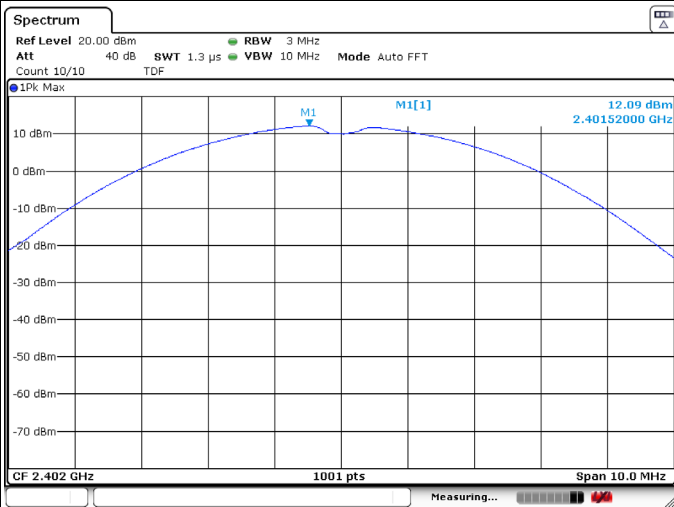

EDR(8DPSK)_2 480 MHz

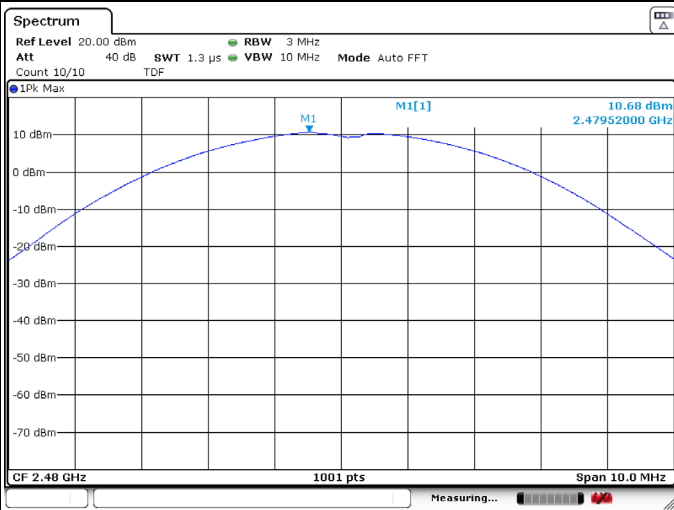

3.3 Carrier Frequency Separation

3.3.1 Regulation

§15.247(a)(1) : Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

3.3.2 Test Procedure


The method of measurement used to test this FHSS device is ANSI C63.10-2013.

- a) The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:
- b) Span: Wide enough to capture the peaks of two adjacent channels.
- c) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- d) Video (or average) bandwidth (VBW) \geq RBW.
- e) Sweep: Auto.
- f) Detector function: Peak.
- g) Trace: Max hold.
- h) Allow the trace to stabilize.
- i) Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

3.3.3 Deviation from Test Standard


No deviation.

3.3.4 Test Setup

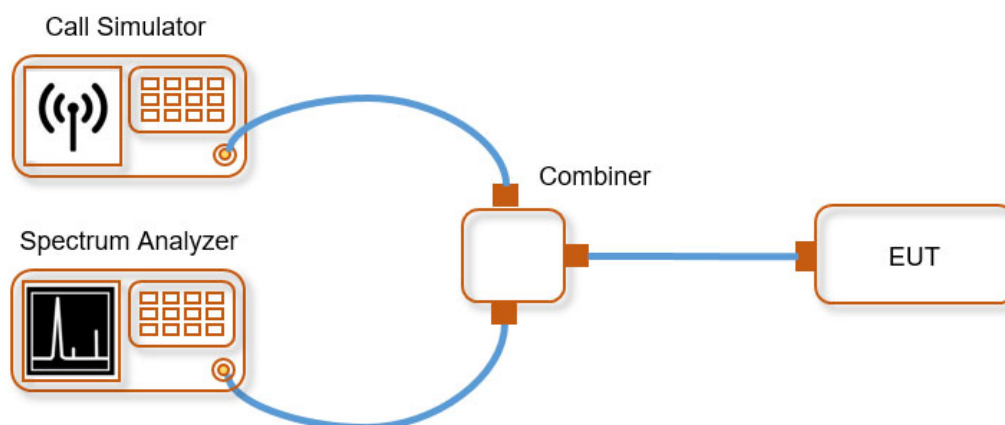



3.3.5 Test Result

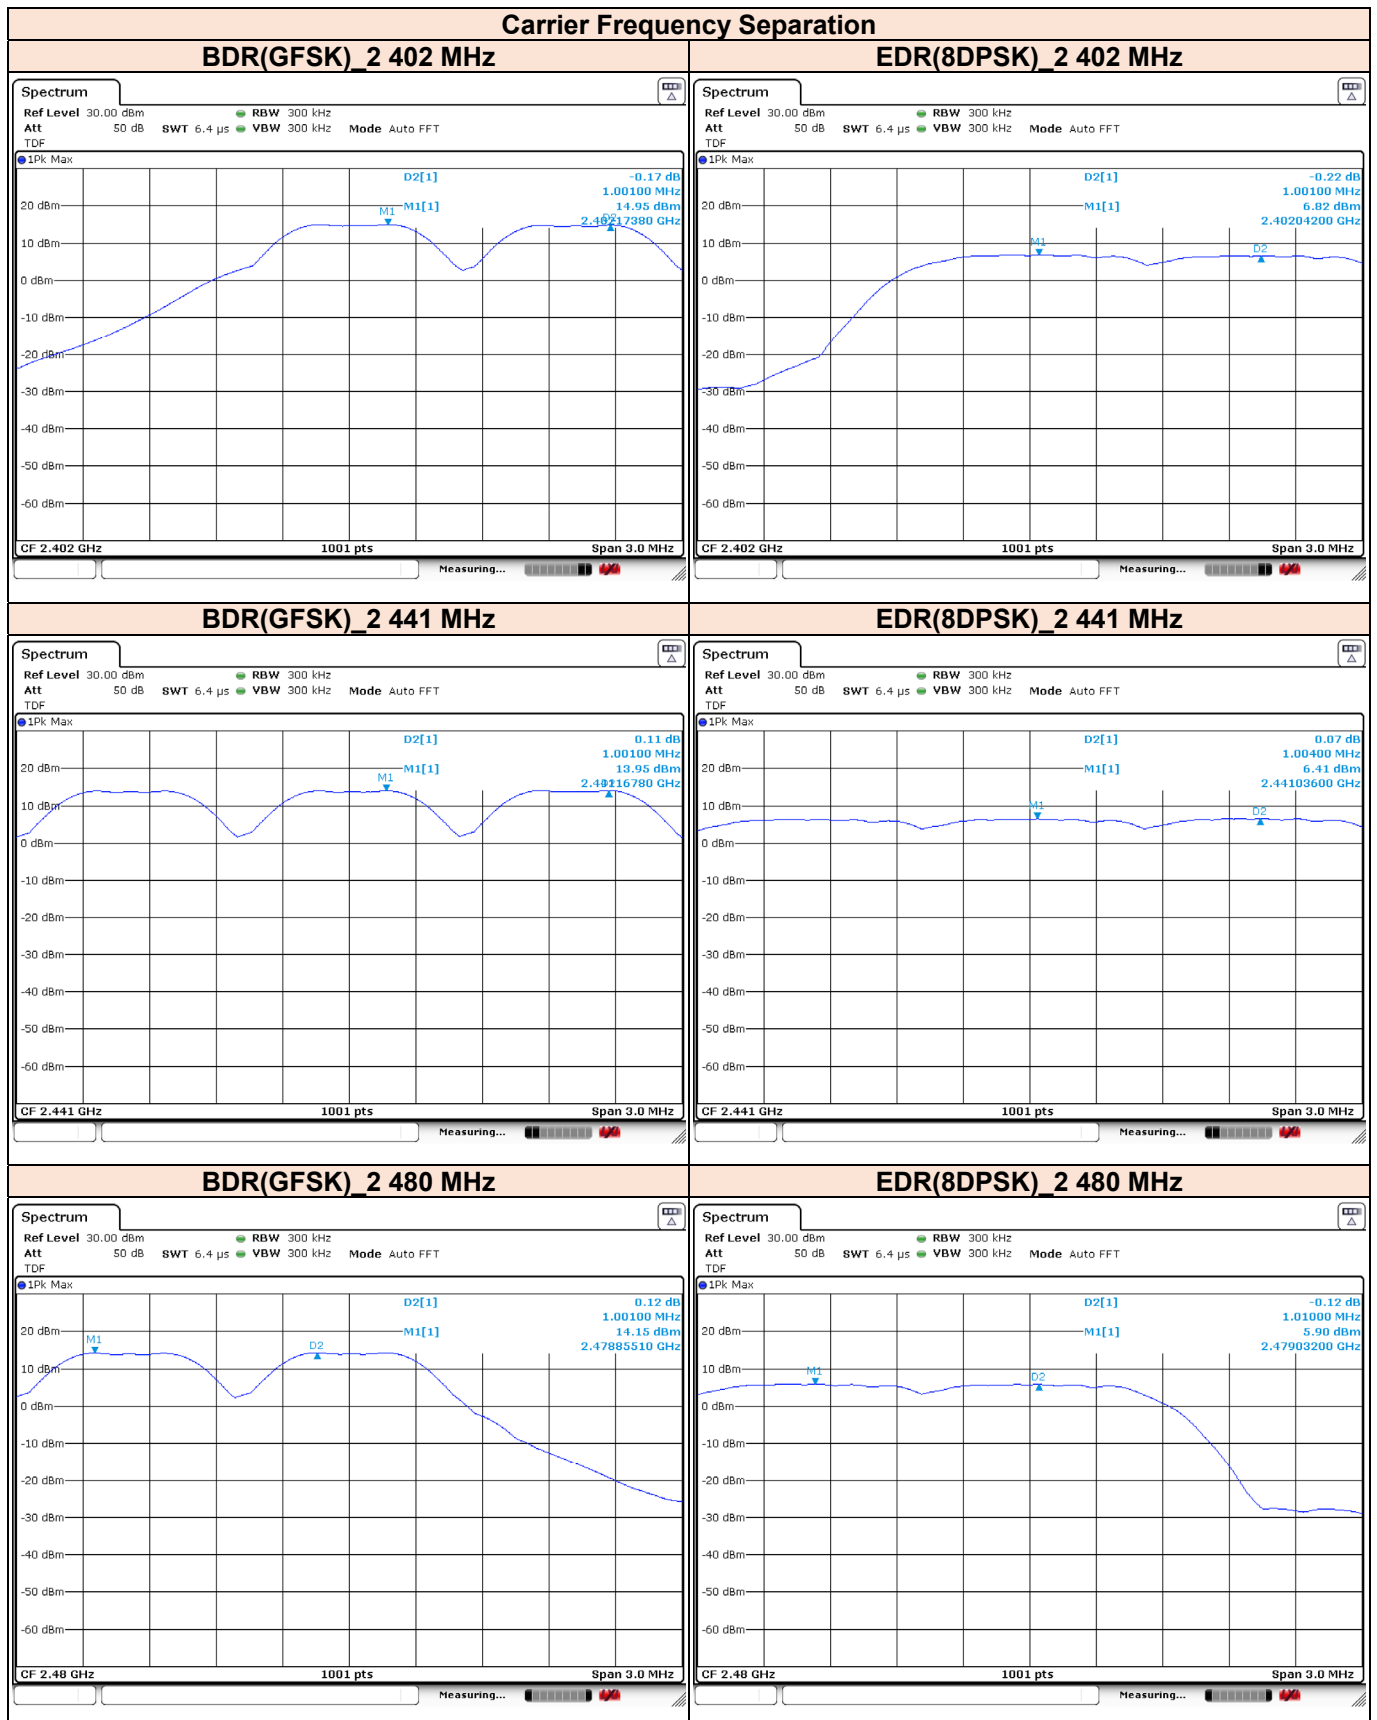

3.4 Number of Hopping Channels

3.4.1 Regulation

§15.247(a)(1)(iii) : Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

§15.247(b)(1) : For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

3.4.2 Test Procedure

The method of measurement used to test this FHSS device is ANSI C63.10-2013.

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:


- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW \geq RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

3.4.3 Deviation from Test Standard

No deviation.


3.4.4 Test Setup

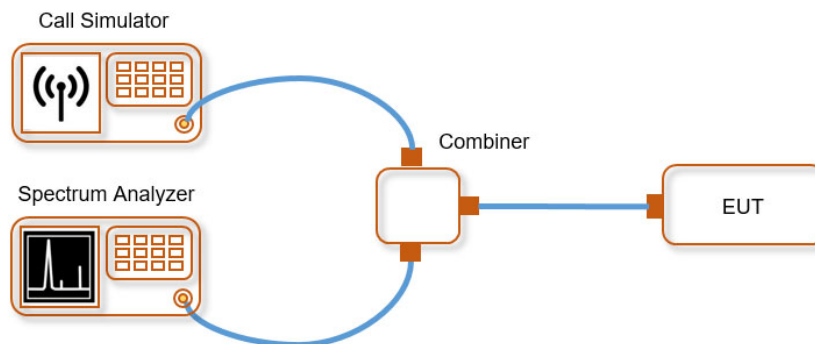



3.4.5 Test Result

[Test Plot]

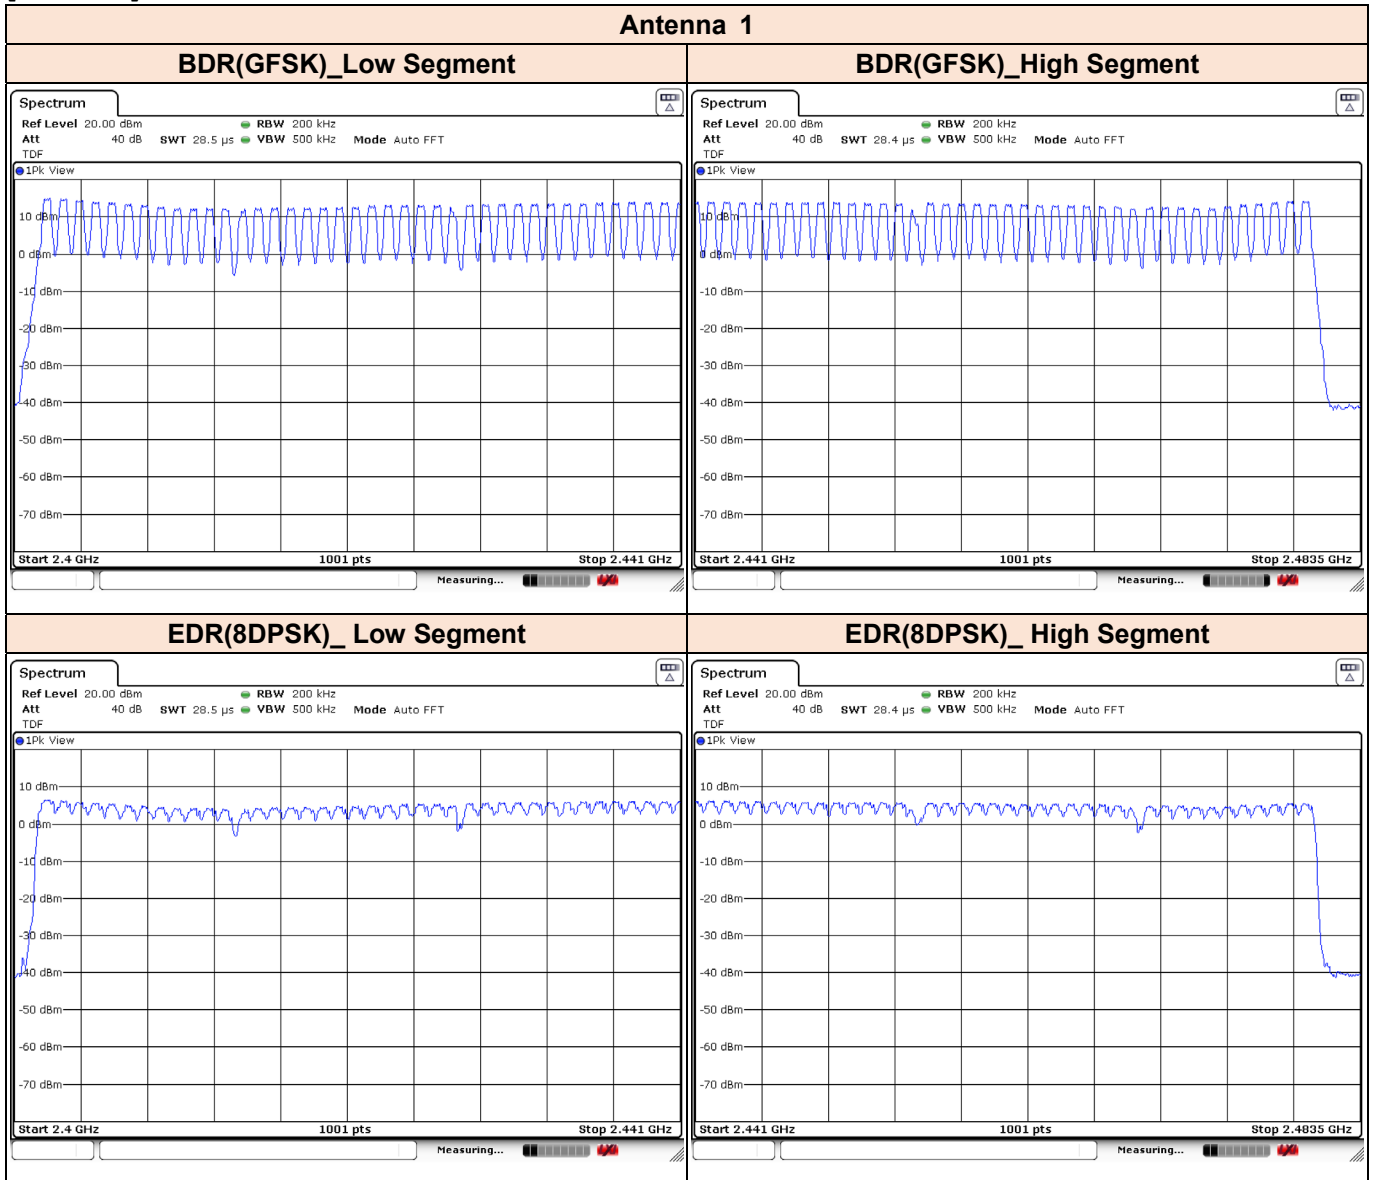

3.5 Time of Occupancy (Dwell Time)

3.5.1 Regulation

§15.247(a)(1)(iii) : Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

3.5.2 Test Procedure

The method of measurement used to test this FHSS device is ANSI C63.10-2013.

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Zero span, centered on a hopping channel.
- b) RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
- c) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d) Detector function: Peak.
- e) Trace: Max hold.

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

$$\begin{aligned} & \text{(Number of hops in the period specified in the requirements)} = \\ & \text{(number of hops on spectrum analyzer)} \times \text{(period specified in the requirements / analyzer sweep time)} \end{aligned}$$


The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation.

The measured transmit time and time between hops shall be consistent with the values described in the operational description for the EUT.

3.5.3 Deviation from Test Standard

No deviation.

3.5.4 Test Setup

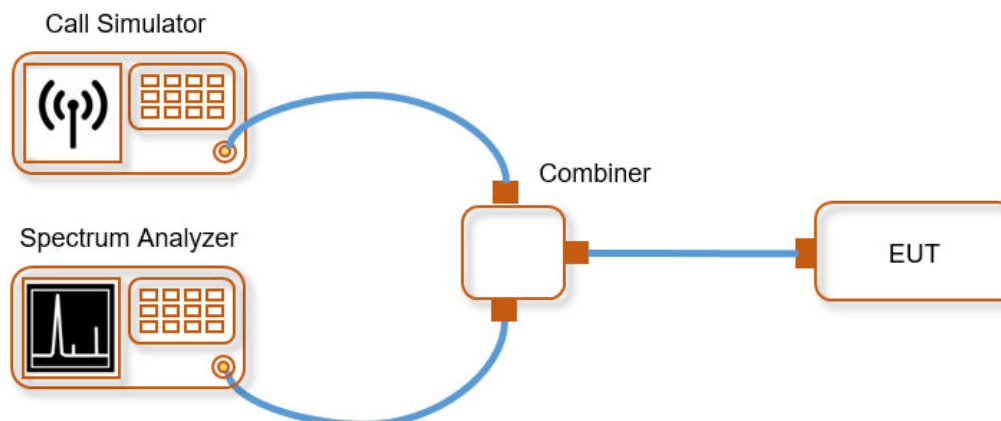

3.5.5 Test Result

[Test Data]

Adaptive Mode	Test Mode	Packet Type	Pulse Width [msec]	Hopping Rate [Hop/Sec]	Number of Channels	Results [sec]	Limit [sec]	Margin [sec]
Normal	BDR (GFSK)	DH1	0.382	800.00	79	0.122	0.400	0.278
		DH3	1.636	400.00	79	0.262	0.400	0.138
		DH5	2.886	266.67	79	0.308	0.400	0.092
	EDR ($\pi/4$ DQPSK)	2-DH1	0.388	800.00	79	0.124	0.400	0.276
		2-DH3	1.636	400.00	79	0.262	0.400	0.138
		2-DH5	2.882	266.67	79	0.307	0.400	0.093
	EDR (8DPSK)	3-DH1	0.388	800.00	79	0.124	0.400	0.276
		3-DH3	1.638	400.00	79	0.262	0.400	0.138
		3-DH5	2.888	266.67	79	0.308	0.400	0.092
AFH	BDR (GFSK)	DH1	0.382	400.00	20	0.061	0.400	0.339
		DH3	1.638	200.00	20	0.131	0.400	0.269
		DH5	2.884	133.33	20	0.154	0.400	0.246
	EDR ($\pi/4$ DQPSK)	2-DH1	0.388	400.00	20	0.062	0.400	0.338
		2-DH3	1.638	200.00	20	0.131	0.400	0.269
		2-DH5	2.888	133.33	20	0.154	0.400	0.246
	EDR (8DPSK)	3-DH1	0.388	400.00	20	0.062	0.400	0.338
		3-DH3	1.638	200.00	20	0.131	0.400	0.269
		3-DH5	2.891	133.33	20	0.154	0.400	0.246





[Test Plot]

Non-AFH



BDR(GFSK)_2 441 MHz_DH1

EDR(π /4DQPSK)_2 441 MHz_2-DH1

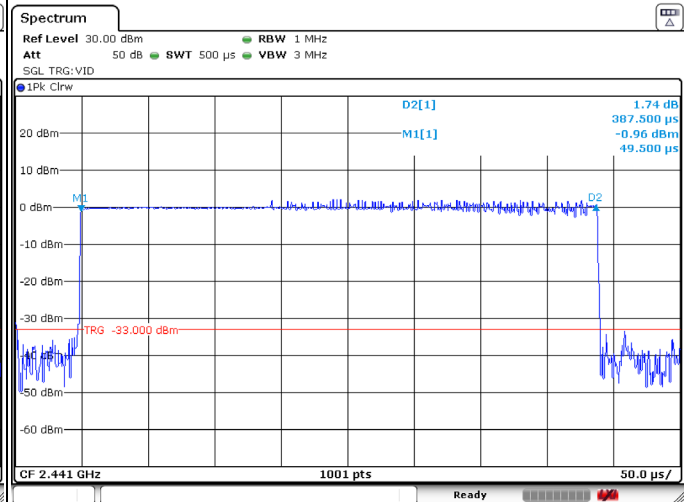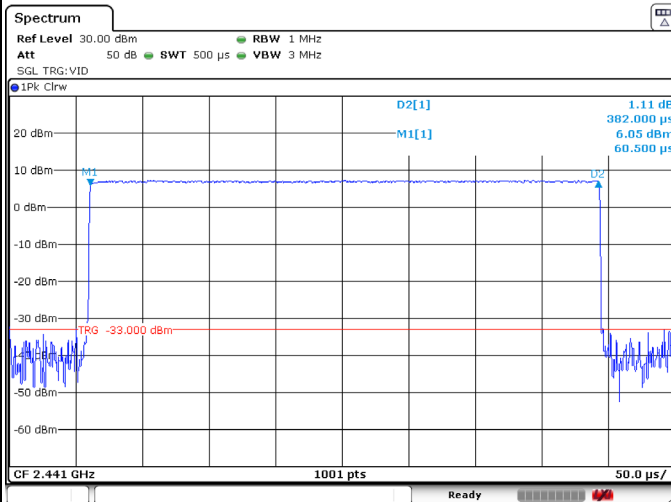



BDR(GFSK)_2 441 MHz_DH3

EDR(π /4DQPSK)_2 441 MHz_2-DH3

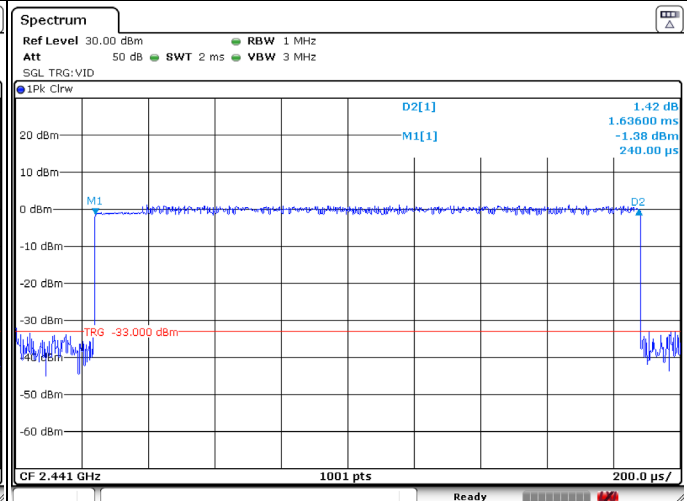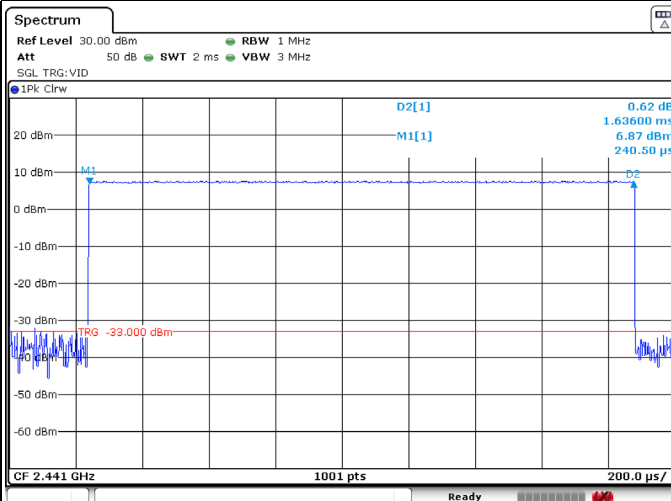

BDR(GFSK)_2 441 MHz_DH5


EDR(π /4DQPSK)_2 441 MHz_2-DH5

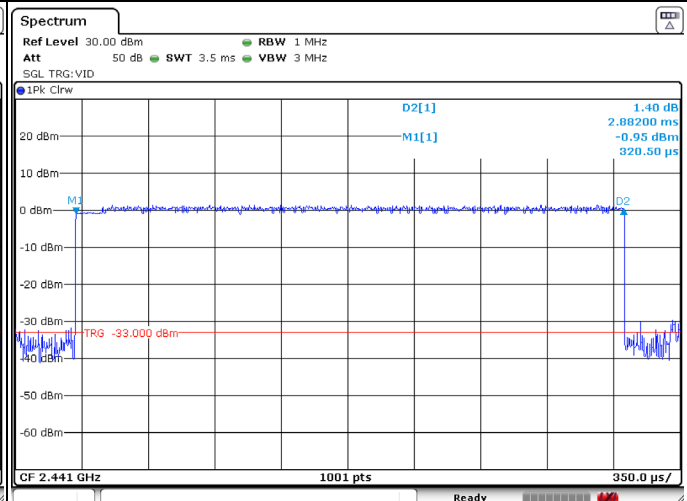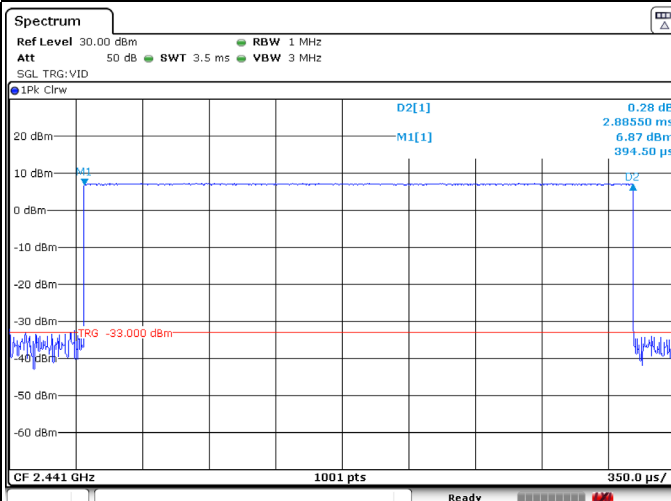




Non-AFH

EDR(8DPSK)_2 441 MHz_3-DH1

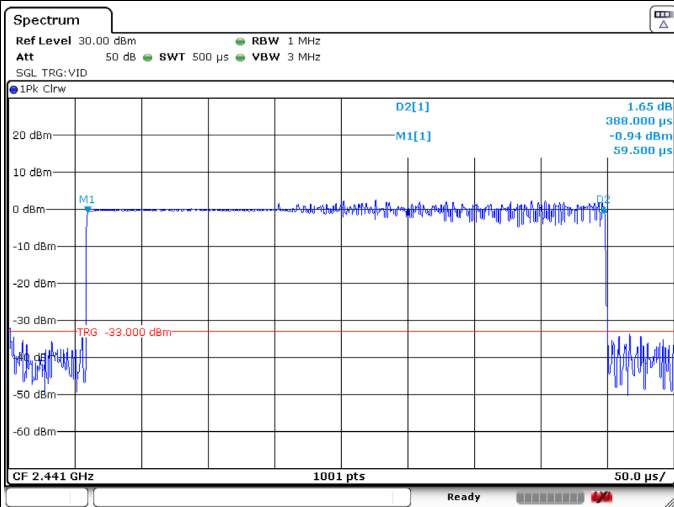

EDR(8DPSK)_2 441 MHz_3-DH3

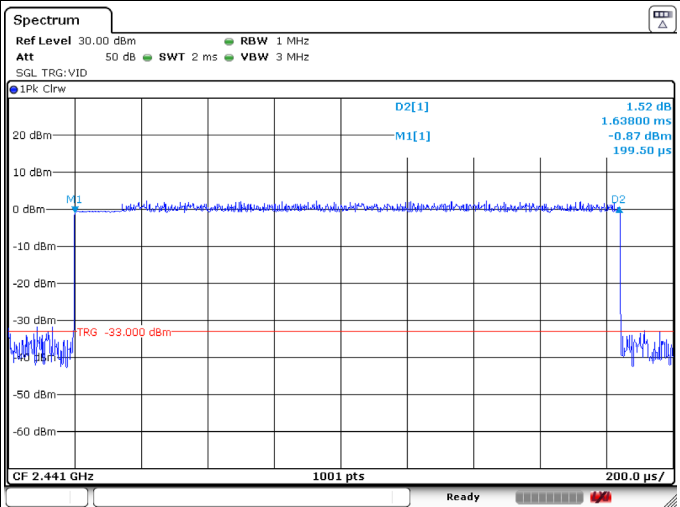

EDR(8DPSK)_2 441 MHz_3-DH5

