

IC

According to RSS-247(5.5), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

According to RSS-Gen(8.9), Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

Table 5- General field strength limits at frequencies above 30 MHz

Frequency(MHz)	Field strength (μ V/m at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

Table 6- General field strength limits at frequencies below 30 MHz

Frequency	Magnetic field strength (H-Field) (μ A/m)	Measurement distance(m)
9 – 490 kHz ¹⁾	6.37/F (F in kHz)	300
490 – 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

According to RSS-Gen(8.10), Restricted frequency bands, identified in table 7, are designated primarily for safety-of-life services (distress calling and certain aeronautical activities), certain satellite downlinks, radio astronomy and some government uses. Except where otherwise indicated, the following conditions related to the restricted frequency bands apply:

- (a) The transmit frequency, including fundamental components of modulation, of licence-exempt radio apparatus shall not fall within the restricted frequency bands listed in table 7 except for apparatus compliant with RSS-287, Emergency Position Indicating Radio Beacons (EPIRB), Emergency Locator Transmitters (ELT), Personal Locator Beacons (PLB), and Maritime Survivor Locator Devices (MSLD).
- (b) Unwanted emissions that fall into restricted frequency bands listed in table 7 shall comply with the limits specified in table 5 and table 6.
- (c) Unwanted emissions that do not fall within the restricted frequency bands listed in table 7 shall comply either with the limits specified in the applicable RSS or with those specified in table 5 and table 6.

Table 7- Restricted frequency bands*

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138	--	

* Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

Test procedure

ANSI C63.10-2013 Section 12.7.7.2, 12.7.5, 12.7.6

KDB 789033 D02 v02r01 – Section G

Test settings**Peak field strength measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in table
3. VBW \geq (3×RBW)
4. Detector = peak
5. Sweep time = auto
6. Trace mode = max hold
7. Allow sweeps to continue until the trace stabilizes

Table. RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1 000 MHz	100 kHz to 120 kHz
> 1 000 MHz	1 MHz

Average field strength measurements**Trace averaging with continuous EUT transmission at full power**

If the EUT can be configured or modified to transmit continuously ($D \geq 98\%$), then the average emission levels shall be measured using the following method (with EUT transmitting continuously):

1. RBW = 1 MHz (unless otherwise specified).
2. VBW \geq (3×RBW).
3. Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq (\text{RBW} / 2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
4. Averaging type = power (i.e., rms):
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
5. Sweep time = auto.
6. Perform a trace average of at least 100 traces.

Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT ($D \geq 98\%$) cannot be achieved and the duty cycle is constant (duty cycle variations are less than $\pm 2\%$), then the following procedure shall be used:

1. The EUT shall be configured to operate at the maximum achievable duty cycle.
2. Measure the duty cycle D of the transmitter output signal as described in 11.6.
3. RBW = 1 MHz (unless otherwise specified).
4. VBW $\geq [3 \times \text{RBW}]$.
5. Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq (\text{RBW} / 2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SRF0132 Page (39) of (69)	 eurofins KCTL
---	---	---

6. Averaging type = power (i.e., rms):
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
7. Sweep time = auto.
8. Perform a trace average of at least 100 traces.
9. A correction factor shall be added to the measurement results prior to comparing with the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (rms) mode was used in step f), then the applicable correction factor is [10 log (1 / D)], where D is the duty cycle.
 - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is [20 log (1 / D)], where D is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous ($D \geq 98\%$) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

Notes:

1. $f < 30 \text{ MHz}$, extrapolation factor of 40 dB/decade of distance. $F_d = 40 \log(D_m/D_s)$
2. $f \geq 30 \text{ MHz}$, extrapolation factor of 20 dB/decade of distance. $F_d = 20 \log(D_m/D_s)$

Where:

F_d = Distance factor in dB


D_m = Measurement distance in meters

D_s = Specification distance in meters

3. Factors(dB) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB) + or F_d (dB)
4. Average test would be performed if the peak result were greater than the average limit.
5. ¹⁾ means restricted band.
6. Below 30 MHz frequency range, In order to search for the worst result, all orientations about parallel, perpendicular, and ground-parallel were investigated then reported. when the emission level was higher than 20 dB of the limit, then the following statement shall be made: "No spurious emissions were detected within 20 dB of the limit."
7. For above 1 GHz pre-scan to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dB μ V/m, which is equivalent to $Y - 51.5 = Z$ dB μ A/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.


Test results (Below 30 MHz) – Worst case: 802.11a / UNII-1_5 240 MHz

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
No spurious emissions were detected within 20 dB of the limit.								

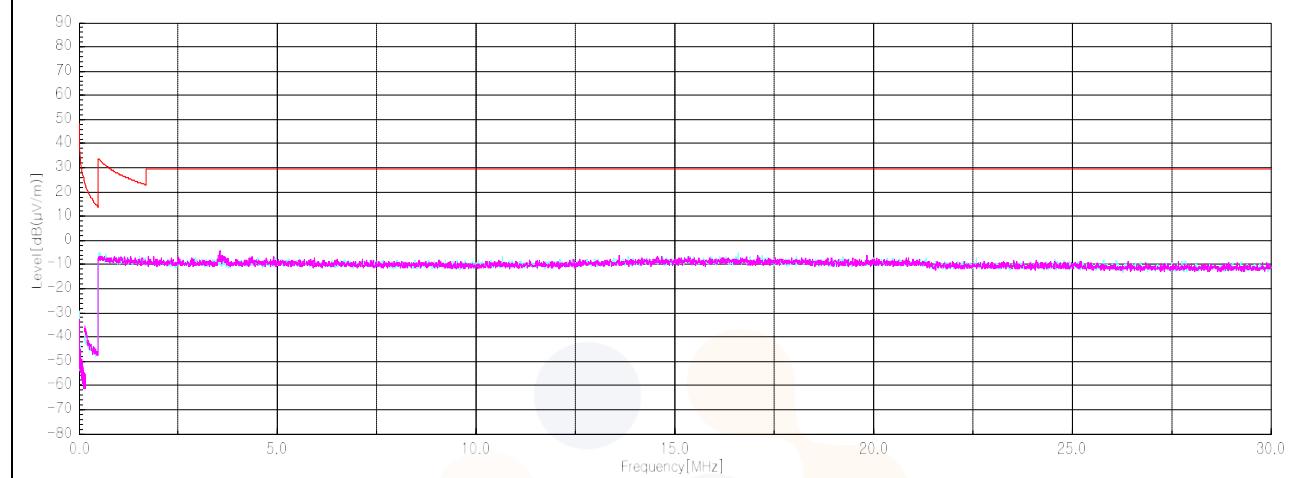Horizontal/Vertical

Test results (Below 1 000 MHz) – Worst case: 802.11a / UNII-1_5 240 MHz

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Quasi peak data								
33.88	H	24.30	22.57	-31.01	-	15.86	40.00	24.14
108.81 ¹⁾	H	23.90	17.88	-30.63	-	11.15	43.50	32.35
129.55 ¹⁾	H	25.40	18.00	-30.52	-	12.88	43.50	30.62
266.44 ¹⁾	H	23.80	19.69	-30.16	-	13.33	46.00	32.67
557.32	V	24.00	24.70	-29.80	-	18.90	46.00	27.10
892.69	H	24.10	26.50	-28.50	-	22.10	46.00	23.90

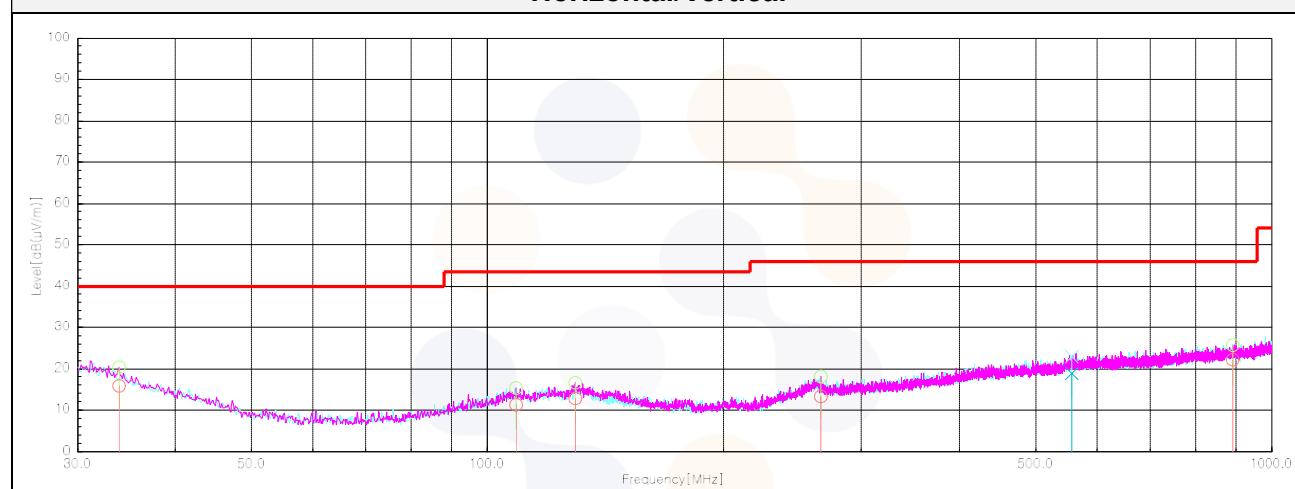Horizontal/Vertical


Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SRF0132 Page (42) of (69)	 eurofins KCTL
---	---	---

Test results (Above 1 000 MHz)

802.11a UNII-1

Lowest Channel (5 180 MHz)


Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(µV))	(dB)	(dB)	(dB)	(dB(µV/m))	(dB(µV/m))	(dB)
Peak data								
5 149.99 ¹⁾	V	48.70	33.20	-30.48	-	51.42	74.00	22.58
10 401.95	H	54.00	38.80	-42.52	-	50.28	68.20	17.92
11 739.78 ¹⁾	V	54.20	38.50	-42.48	-	50.22	74.00	23.78
15 580.78 ¹⁾	V	52.60	37.94	-40.53	-	50.01	74.00	23.99
Average Data								
5 149.99 ¹⁾	V	37.23	33.20	-30.48	0.29	40.24	54.00	13.76

Middle Channel (5 200 MHz)


Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(µV))	(dB)	(dB)	(dB)	(dB(µV/m))	(dB(µV/m))	(dB)
Peak data								
10 478.23	V	53.90	38.80	-42.36	-	50.34	68.20	17.86
15 800.05 ¹⁾	V	52.30	37.70	-40.06	-	49.94	74.00	24.06
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Highest Channel (5 240 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(µV))	(dB)	(dB)	(dB)	(dB(µV/m))	(dB(µV/m))	(dB)
Peak data								
10 462.13	V	54.00	38.80	-42.39	-	50.41	68.20	17.79
15 930.38 ¹⁾	V	52.50	37.76	-39.78	-	50.48	74.00	23.52
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

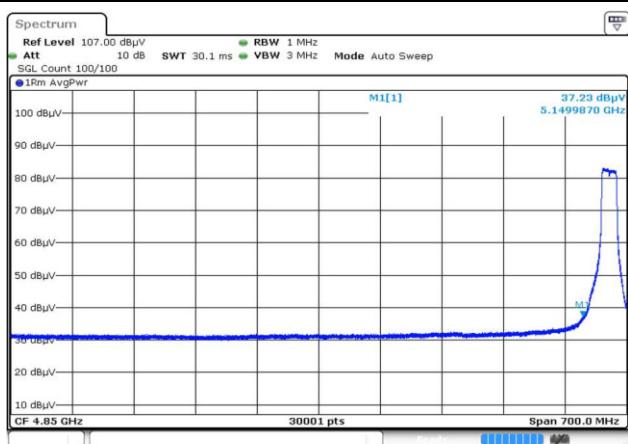802.11a UNII-1**Lowest Channel (5 180 MHz)****Average Data**

Blank

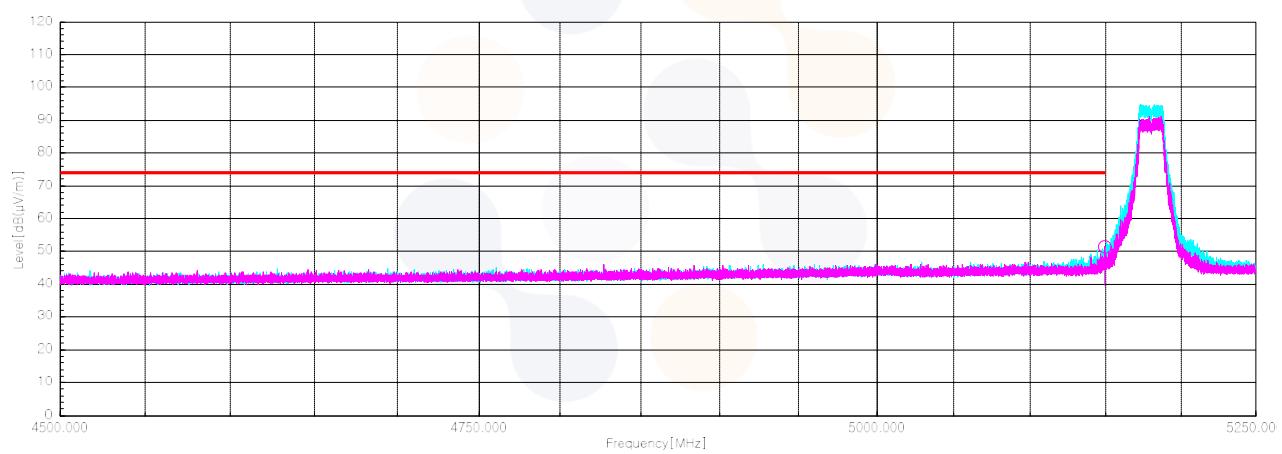Horizontal/Vertical for Band-edge

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SRF0132 Page (44) of (69)	 eurofins KCTL
---	---	--

802.11n HT20 UNII-1

Lowest Channel (5 180 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(µV))	(dB)	(dB)	(dB)	(dB(µV/m))	(dB(µV/m))	(dB)
Peak data								
5 149.87 ¹⁾	V	50.40	33.20	-30.48	-	53.12	74.00	20.88
10 469.42	H	53.20	38.80	-42.37	-	49.63	68.20	18.57
15 631.38 ¹⁾	V	52.00	37.67	-40.42	-	49.25	74.00	24.75
Average Data								
5 149.87 ¹⁾	V	36.99	33.20	-30.48	0.42	40.13	54.00	13.87

Middle Channel (5 200 MHz)


Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(µV))	(dB)	(dB)	(dB)	(dB(µV/m))	(dB(µV/m))	(dB)
Peak data								
10 368.22	H	53.50	38.80	-42.59	-	49.71	68.20	18.49
15 365.35 ¹⁾	H	51.80	38.54	-40.64	-	49.70	74.00	24.30
Average Data								

No spurious emissions were detected within 20 dB of the limit.


Highest Channel (5 240 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(µV))	(dB)	(dB)	(dB)	(dB(µV/m))	(dB(µV/m))	(dB)
Peak data								
10 542.25	H	53.40	38.80	-42.34	-	49.86	68.20	18.34
15 773.98 ¹⁾	V	52.00	37.70	-40.11	-	49.59	74.00	24.41
Average Data								

No spurious emissions were detected within 20 dB of the limit.

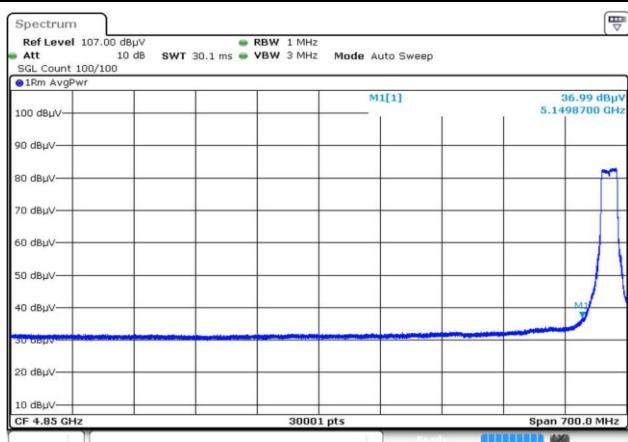802.11n HT20 UNII-1**Lowest Channel (5 180 MHz)****Average Data**

Blank

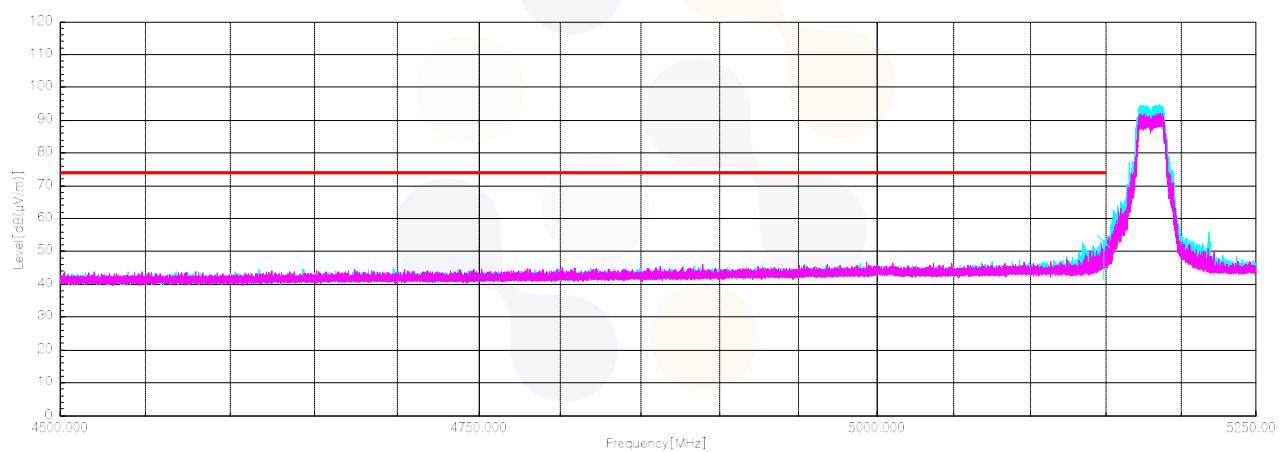
Horizontal/Vertical for Band-edge

Plot of Harmonics and Spurious Emissions


In order to simplify the report, attached plots were only the lowest margin condition

802.11a UNII-1_Lowest Channel (5 180 MHz)


Horizontal/Vertical for 1 GHz ~ 6.5 GHz

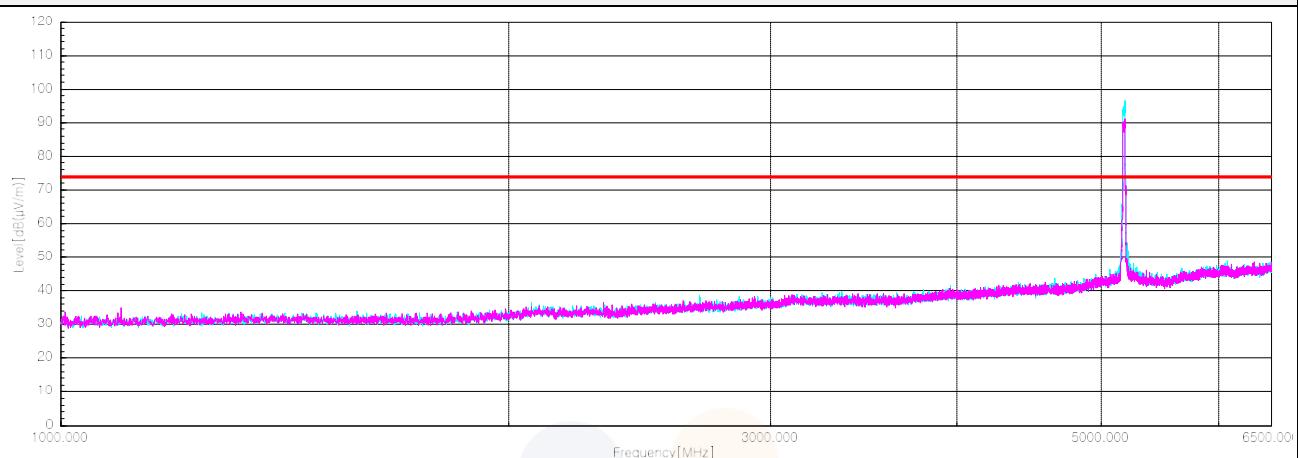

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

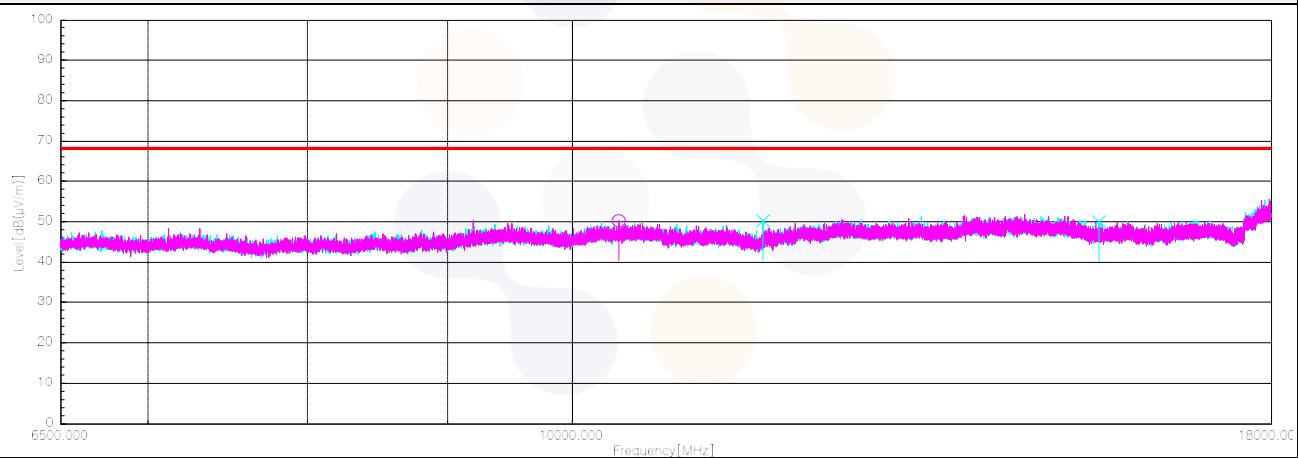

Horizontal/Vertical for 18 GHz ~ 40 GHz

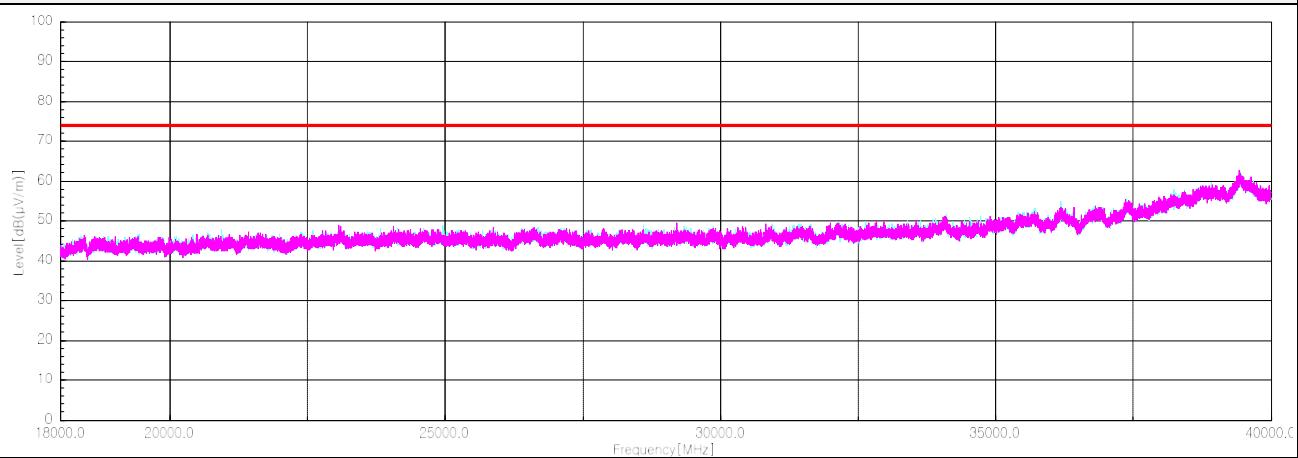

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SRF0132 Page (47) of (69)	 eurofins KCTL
---	---	---

802.11a UNII-2A

Lowest Channel (5 260 MHz)


Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(µV))	(dB)	(dB)	(dB)	(dB(µV/m))	(dB(µV/m))	(dB)
Peak data								
10 586.33	H	54.00	38.80	-42.38	-	50.42	68.20	17.78
15 844.90 ¹⁾	V	51.90	37.70	-39.96	-	49.64	74.00	24.36
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Middle Channel (5 280 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(µV))	(dB)	(dB)	(dB)	(dB(µV/m))	(dB(µV/m))	(dB)
Peak data								
10 587.48	H	53.70	38.80	-42.38	-	50.12	68.20	18.08
16 042.32 ¹⁾	H	51.70	37.52	-39.60	-	49.62	74.00	24.38
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Highest Channel (5 320 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(µV))	(dB)	(dB)	(dB)	(dB(µV/m))	(dB(µV/m))	(dB)
Peak data								
5 350.27 ¹⁾	V	51.00	33.00	-30.33	-	53.67	74.00	20.33
10 548.38	H	53.20	38.80	-42.35	-	49.65	68.20	18.55
15 820.37 ¹⁾	V	51.90	37.70	-40.01	-	49.59	74.00	24.41
Average Data								
5 350.27 ¹⁾	V	38.81	33.00	-30.33	0.29	41.77	54.00	12.23

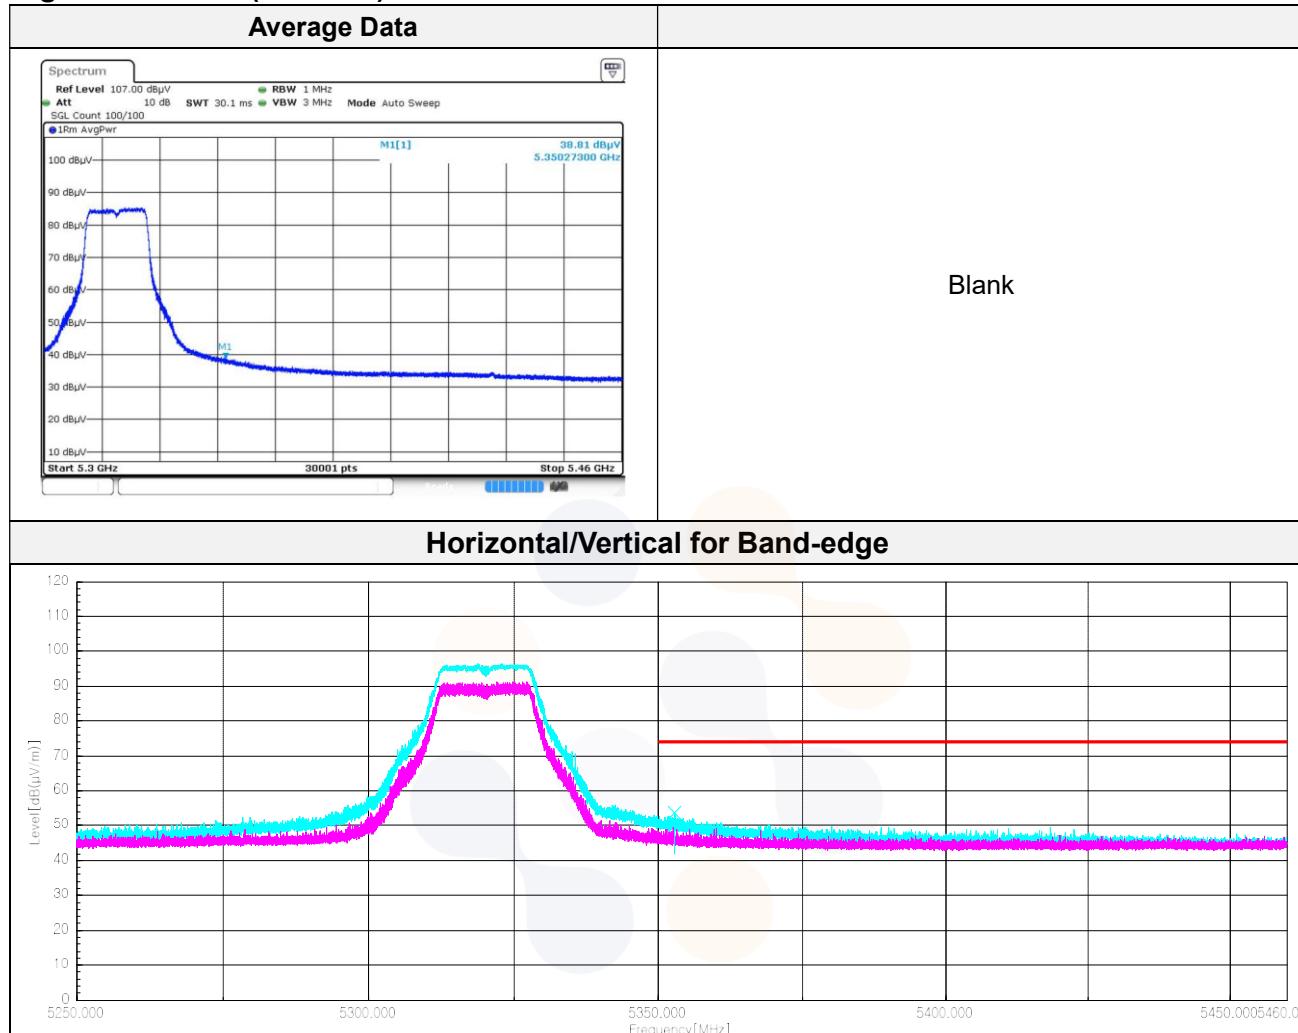802.11a UNII-2A**Highest Channel (5 320 MHz)**

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SRF0132 Page (49) of (69)	 eurofins KCTL
---	---	---

802.11n HT20 UNII-2A

Lowest Channel (5 260 MHz)


Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(µV))	(dB)	(dB)	(dB)	(dB(µV/m))	(dB(µV/m))	(dB)
Peak data								
10 408.85	V	53.40	38.80	-42.50	-	49.70	68.20	18.50
15 814.23 ¹⁾	V	51.80	37.70	-40.03	-	49.47	74.00	24.53
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Middle Channel (5 280 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(µV))	(dB)	(dB)	(dB)	(dB(µV/m))	(dB(µV/m))	(dB)
Peak data								
10 719.73 ¹⁾	V	53.30	39.14	-42.49	-	49.95	74.00	24.05
15 819.60 ¹⁾	H	52.20	37.70	-40.02	-	49.88	74.00	24.12
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Highest Channel (5 320 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(µV))	(dB)	(dB)	(dB)	(dB(µV/m))	(dB(µV/m))	(dB)
Peak data								
5 350.08 ¹⁾	V	50.70	33.00	-30.33	-	53.37	74.00	20.63
10 588.63	H	53.00	38.80	-42.38	-	49.42	68.20	18.78
15 990.95 ¹⁾	H	51.50	37.70	-39.65	-	49.55	74.00	24.45
Average Data								
5 350.08 ¹⁾	V	37.79	33.00	-30.33	0.42	40.88	54.00	13.12

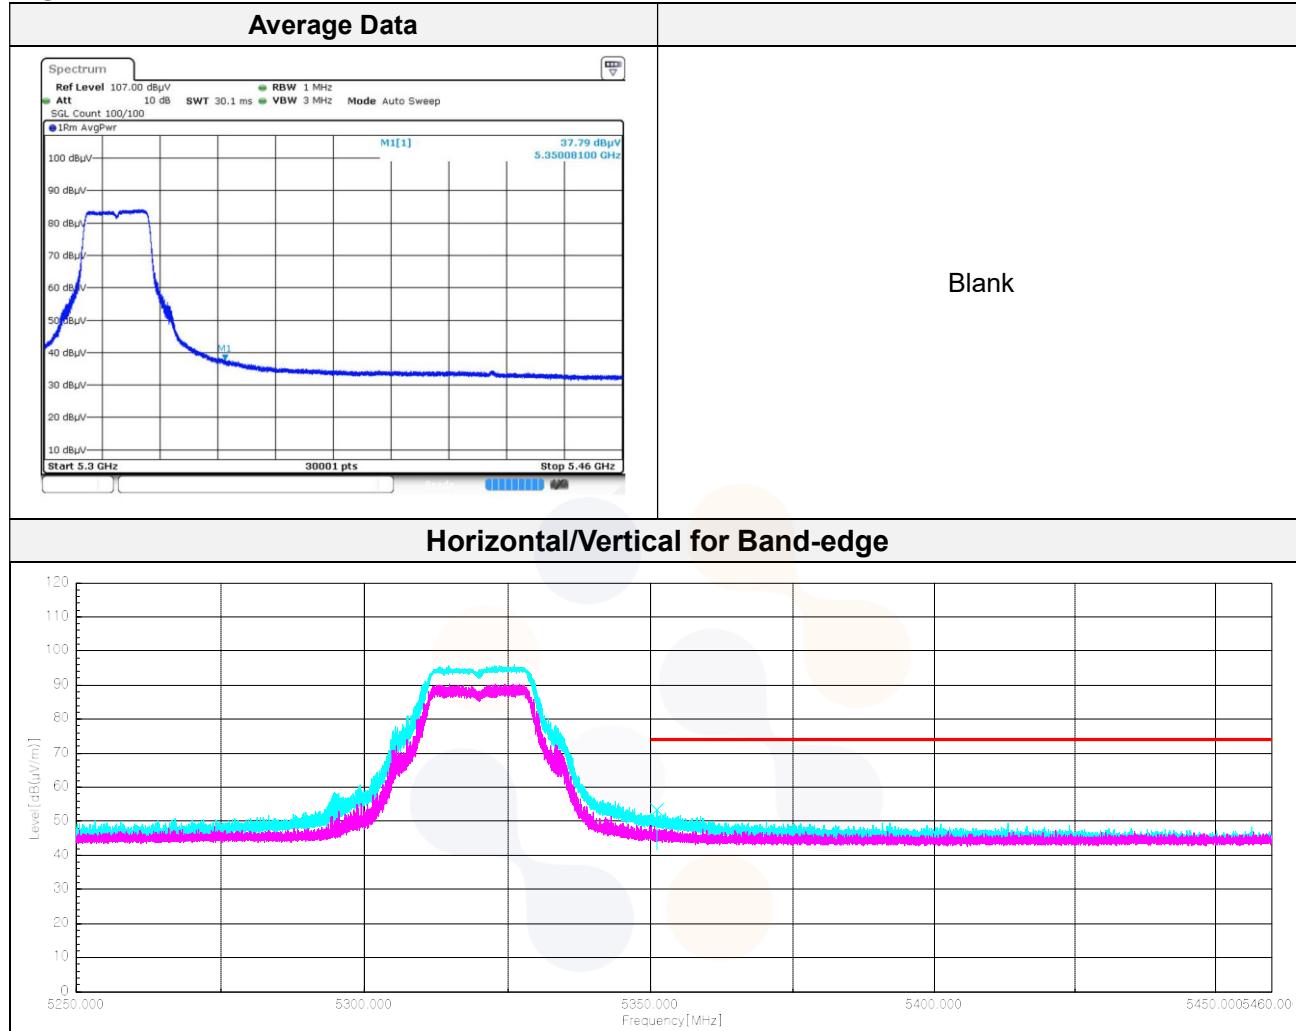
802.11n HT20 UNII-2A**Highest Channel (5 320 MHz)**

Plot of Harmonics and Spurious Emissions


In order to simplify the report, attached plots were only the lowest margin condition

802.11a_UNII-2A_Highest Channel (5 320 MHz)


Horizontal/Vertical for 1 GHz ~ 6.5 GHz

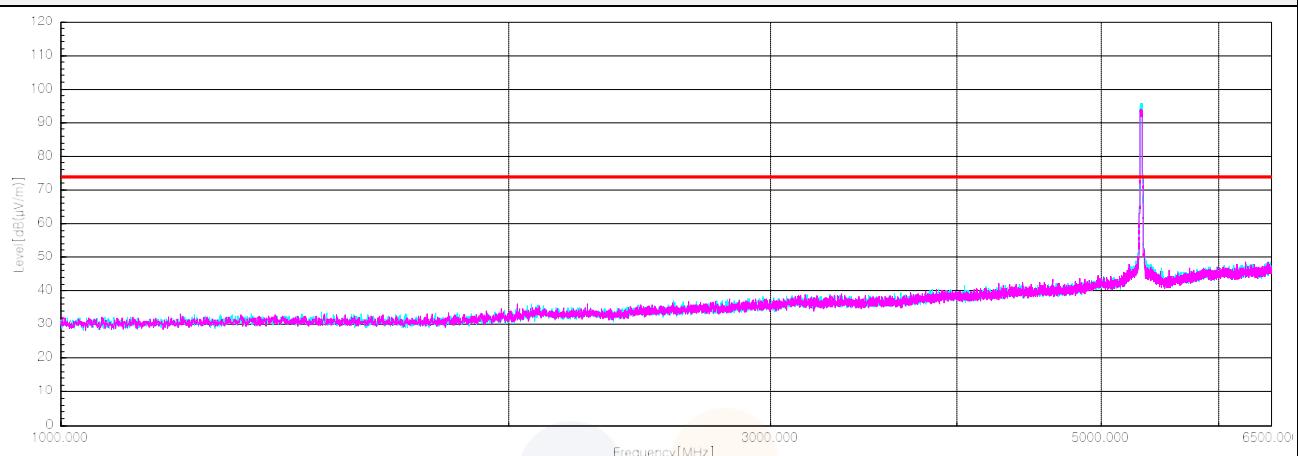

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

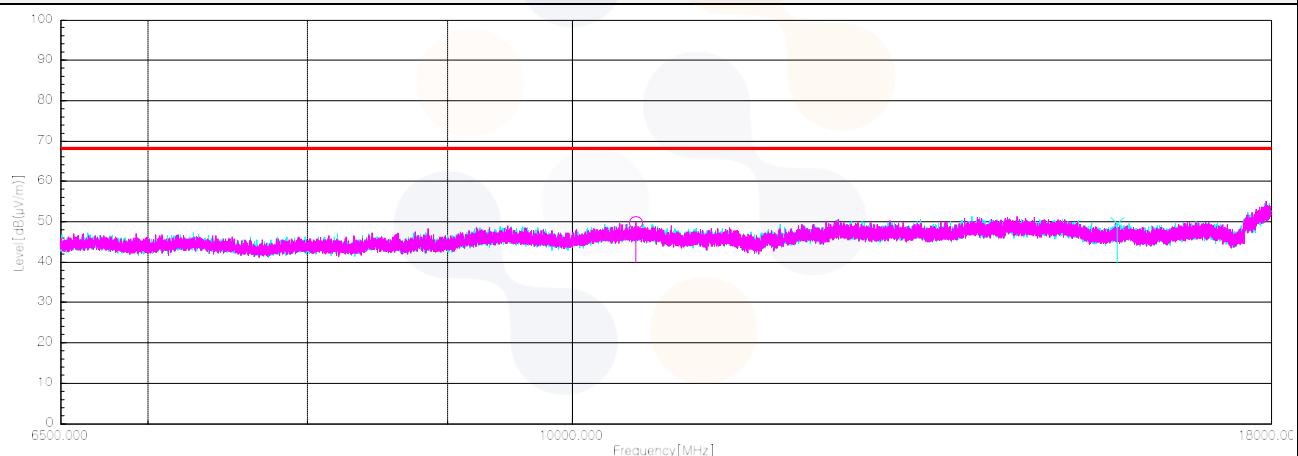

Horizontal/Vertical for 18 GHz ~ 40 GHz

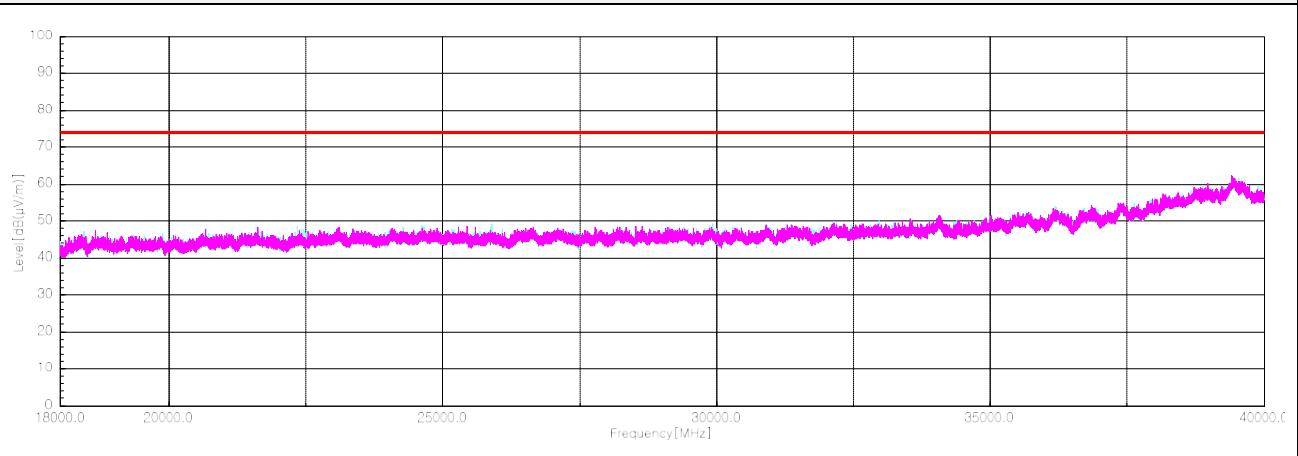

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SRF0132 Page (52) of (69)	 eurofins KCTL
---	---	---

802.11a UNII-2C

Lowest Channel (5 500 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(µV))	(dB)	(dB)	(dB)	(dB(µV/m))	(dB(µV/m))	(dB)
Peak data								
5 459.93 ¹⁾	V	49.60	33.00	-30.11	-	52.49	74.00	21.51
11 049.78 ¹⁾	H	53.00	38.80	-42.71	-	49.09	74.00	24.91
16 749.95	V	51.90	37.50	-38.26	-	51.14	68.20	17.06
Average Data								
5 459.93 ¹⁾	V	36.20	33.00	-30.11	0.29	39.38	54.00	14.62

Middle Channel (5 600 MHz)


Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(µV))	(dB)	(dB)	(dB)	(dB(µV/m))	(dB(µV/m))	(dB)
Peak data								
11 242.98 ¹⁾	H	52.70	38.89	-42.71	-	48.88	74.00	25.12
17 051.63	H	50.70	37.40	-37.25	-	50.85	68.20	17.35
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Highest Channel (5 700 MHz)


Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(µV))	(dB)	(dB)	(dB)	(dB(µV/m))	(dB(µV/m))	(dB)
Peak data								
5 725.47	V	48.90	33.60	-29.98	-	52.52	68.20	15.68
11 330.00 ¹⁾	V	52.60	38.90	-42.72	-	48.78	74.00	25.22
17 177.37	V	50.20	37.55	-37.18	-	50.57	68.20	17.63
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

802.11a UNII-2C

Lowest Channel (5 500 MHz)

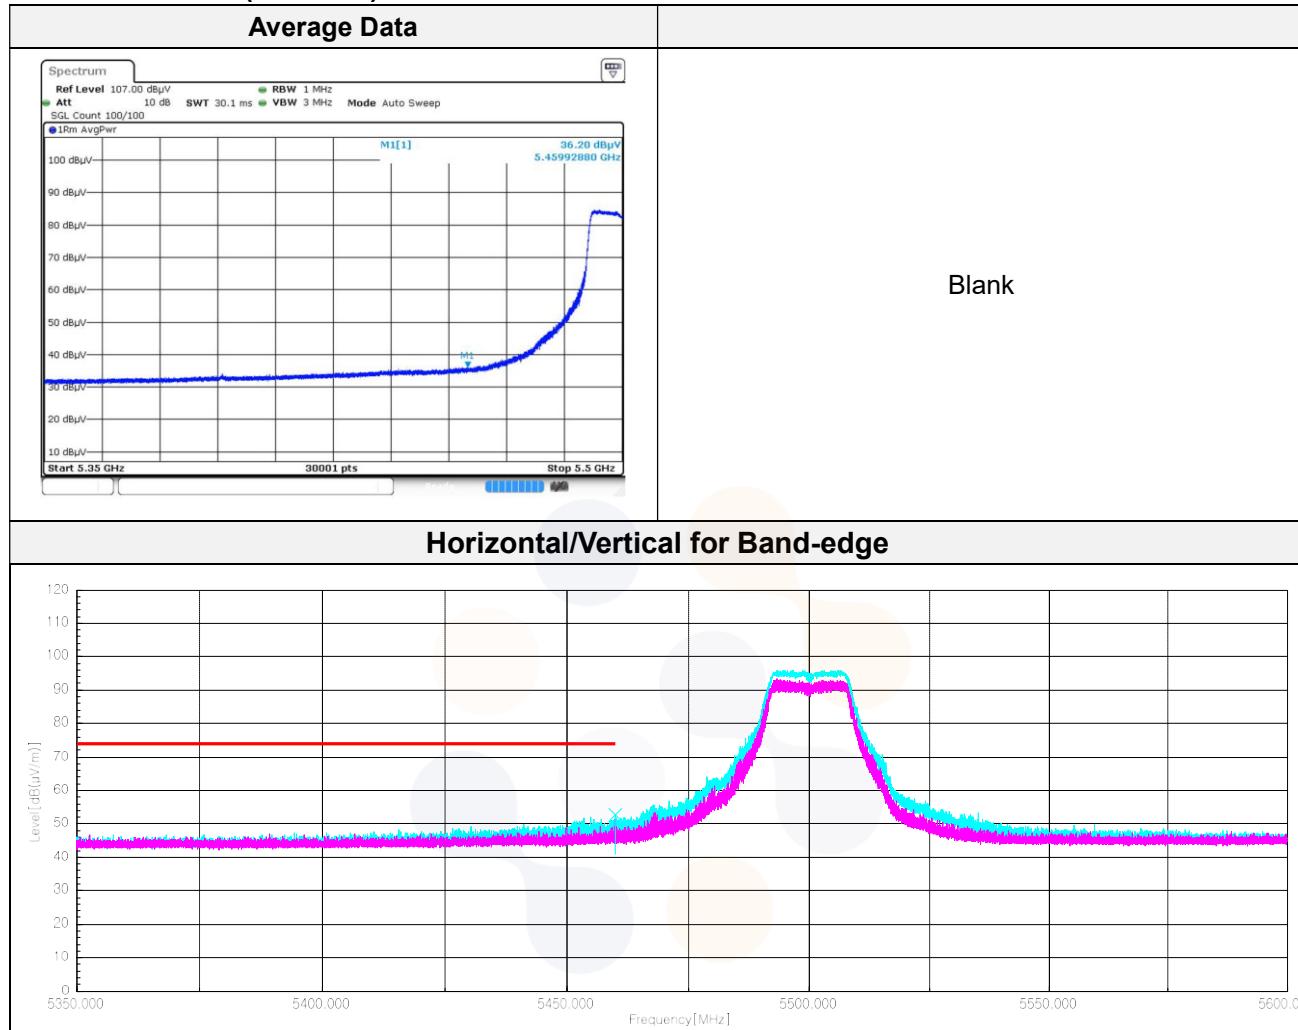

Highest Channel (5 700 MHz)

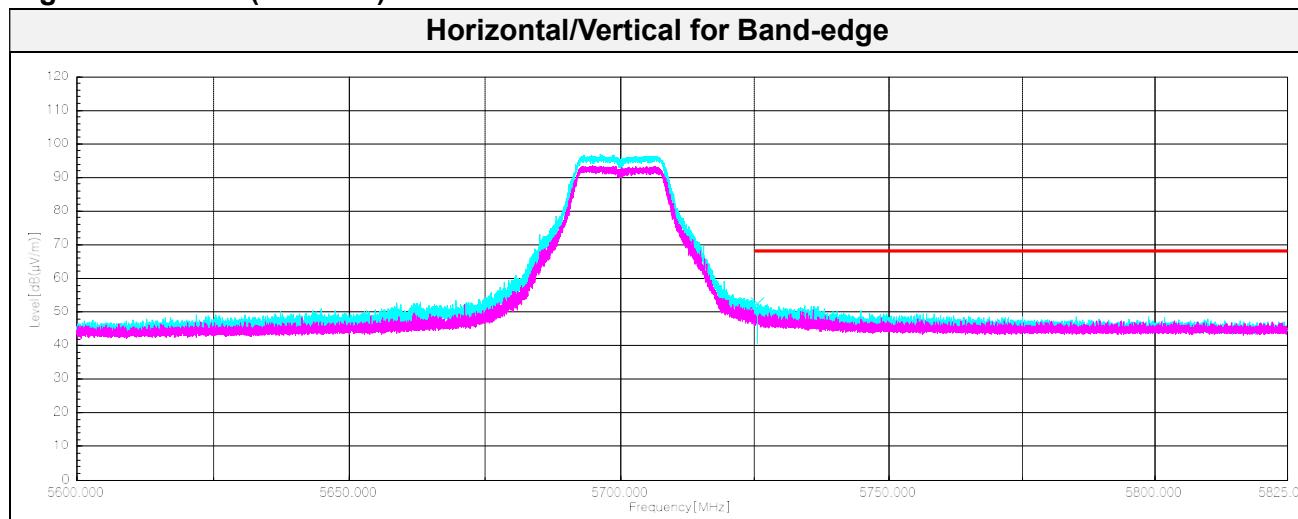

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SRF0132 Page (54) of (69)	 KCTL
---	---	--

802.11n HT20 UNII-2C

Lowest Channel (5 500 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(µV))	(dB)	(dB)	(dB)	(dB(µV/m))	(dB(µV/m))	(dB)
Peak data								
5 459.24 ¹⁾	V	51.80	33.00	-30.11	-	54.69	74.00	19.31
10 886.48 ¹⁾	H	52.30	38.93	-42.62	-	48.61	74.00	25.39
16 602.37	H	51.20	37.70	-38.84	-	50.06	68.20	18.14
Average Data								
5 459.24 ¹⁾	V	37.46	33.00	-30.11	0.42	40.77	54.00	13.23

Middle Channel (5 600 MHz)


Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(µV))	(dB)	(dB)	(dB)	(dB(µV/m))	(dB(µV/m))	(dB)
Peak data								
11 325.40 ¹⁾	V	52.60	38.90	-42.72	-	48.78	74.00	25.22
16 805.92	H	50.40	37.39	-38.04	-	49.75	68.20	18.45
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Highest Channel (5 700 MHz)


Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(µV))	(dB)	(dB)	(dB)	(dB(µV/m))	(dB(µV/m))	(dB)
Peak data								
5 725.32	V	51.30	33.60	-29.98	-	54.92	68.20	13.28
11 613.67 ¹⁾	V	52.00	38.57	-42.60	-	47.97	74.00	26.03
17 129.45	H	49.70	37.40	-37.21	-	49.89	68.20	18.31
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

802.11n HT20 UNII-2C

Lowest Channel (5 500 MHz)

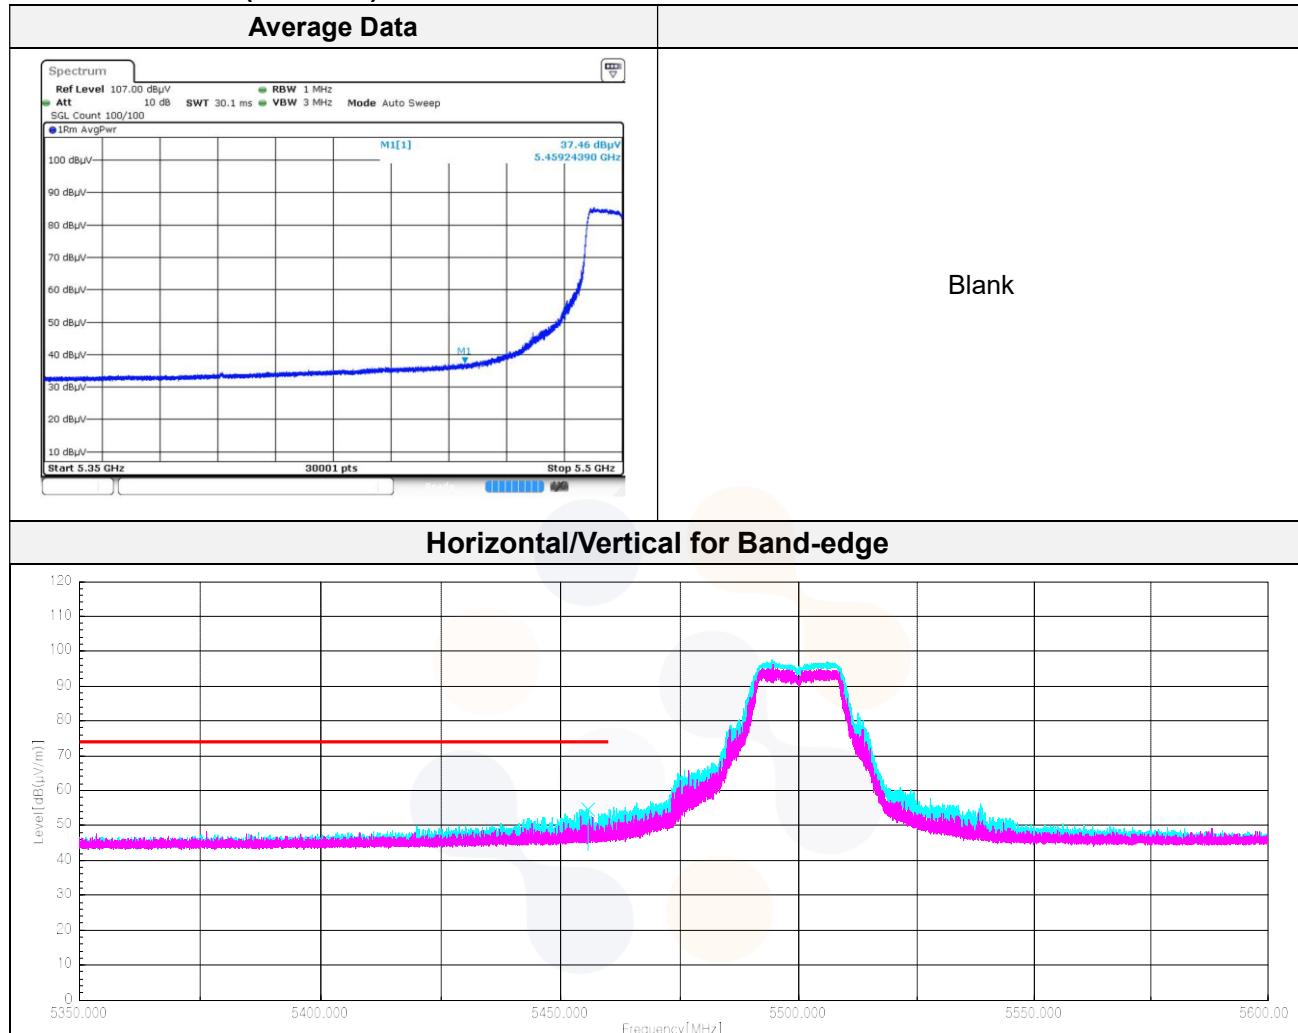

Highest Channel (5 700 MHz)

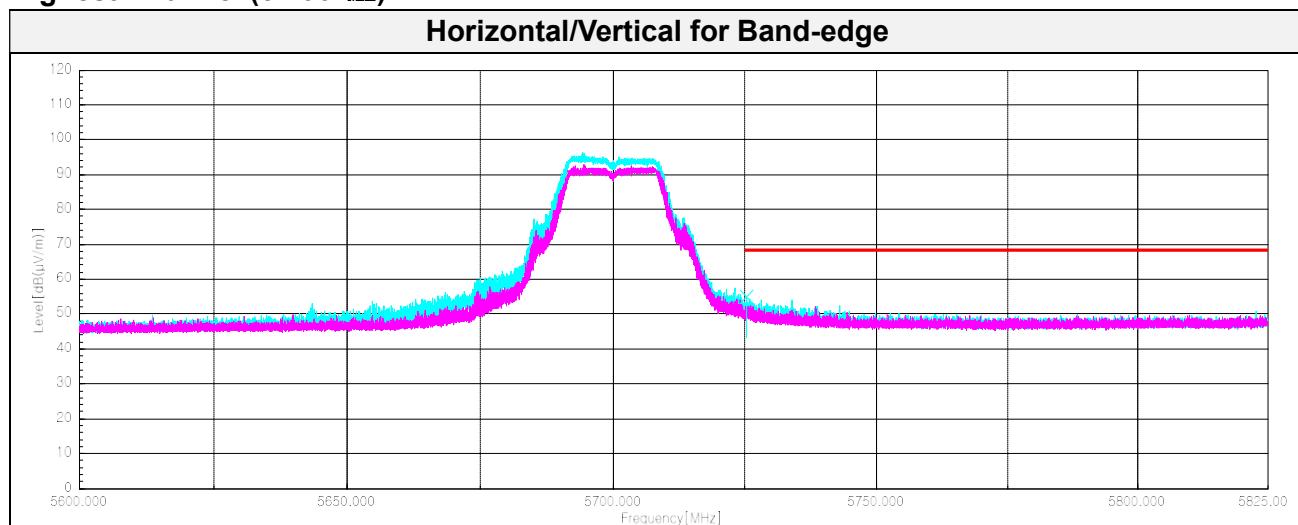


Plot of Harmonics and Spurious Emissions


In order to simplify the report, attached plots were only the lowest margin condition

802.11n HT20_UNII-2C_Lowest Channel (5 500 MHz)


Horizontal/Vertical for 1 GHz ~ 6.5 GHz

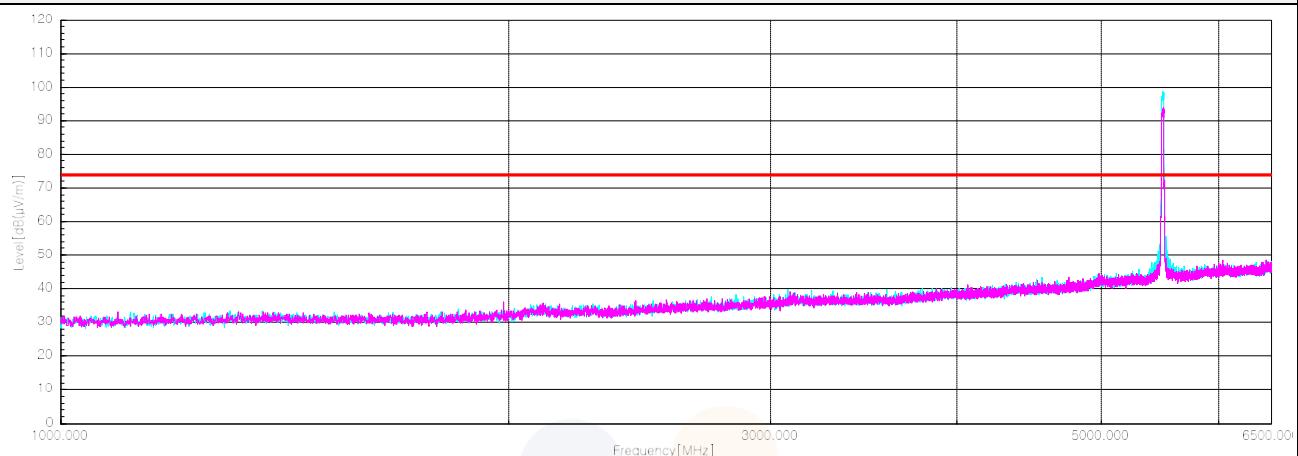

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

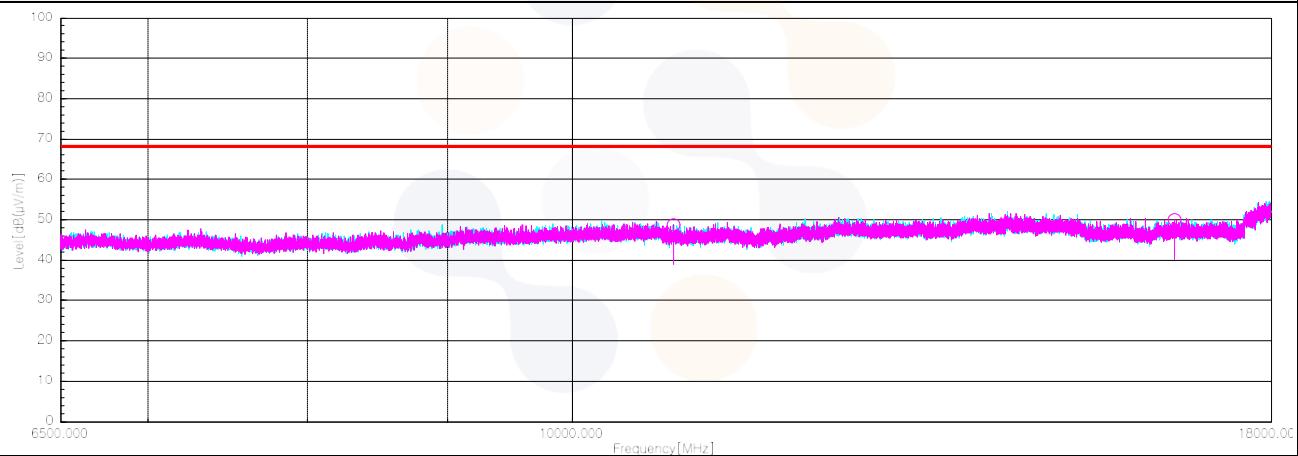

Horizontal/Vertical for 18 GHz ~ 40 GHz

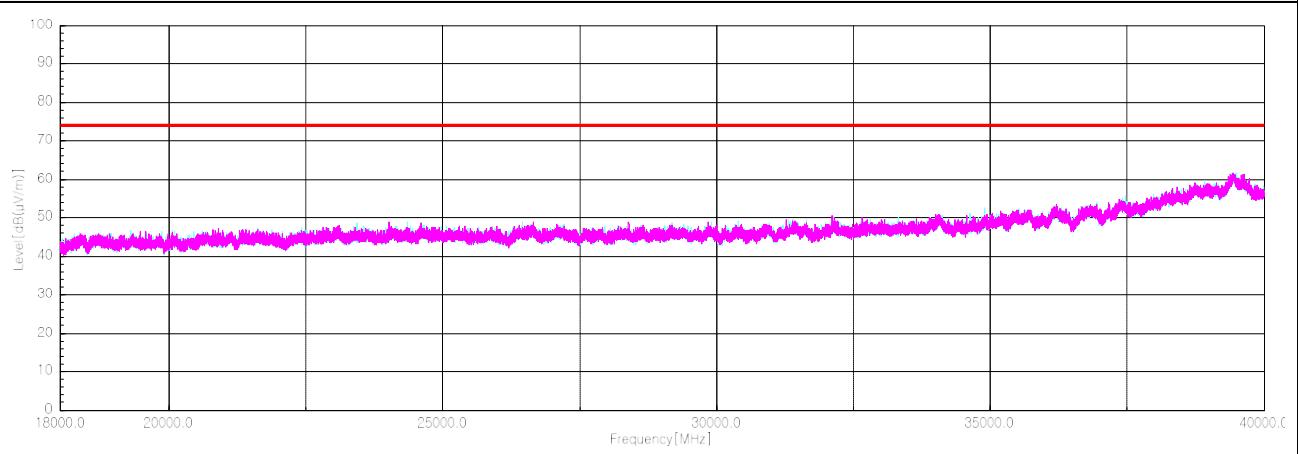

Straddle Channel**802.11a (5 720 MHz)**

Frequency (MHz)	Pol. (V/H)	Reading (dB(µV))	Ant. Factor (dB)	Amp.+Cable (dB)	DCF (dB)	Result (dB(µV/m))	Limit (dB(µV/m))	Margin (dB)
Peak data								
11 234.17 ¹⁾	H	52.80	38.87	-42.71	-	48.96	74.00	25.04
17 051.63	H	49.60	37.40	-37.25	-	49.75	68.20	18.45
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

802.11n HT20 (5 720 MHz)


Frequency (MHz)	Pol. (V/H)	Reading (dB(µV))	Ant. Factor (dB)	Amp.+Cable (dB)	DCF (dB)	Result (dB(µV/m))	Limit (dB(µV/m))	Margin (dB)
Peak data								
11 394.40 ¹⁾	V	52.40	39.09	-42.72	-	48.77	74.00	25.23
17 084.22	V	50.20	37.47	-37.23	-	50.44	68.20	17.76
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Plot of Harmonics and Spurious Emissions


In order to simplify the report, attached plots were only the lowest margin condition

802.11n HT20_Straddle Channel (5 720 MHz)


Horizontal/Vertical for 1 GHz ~ 6.5 GHz

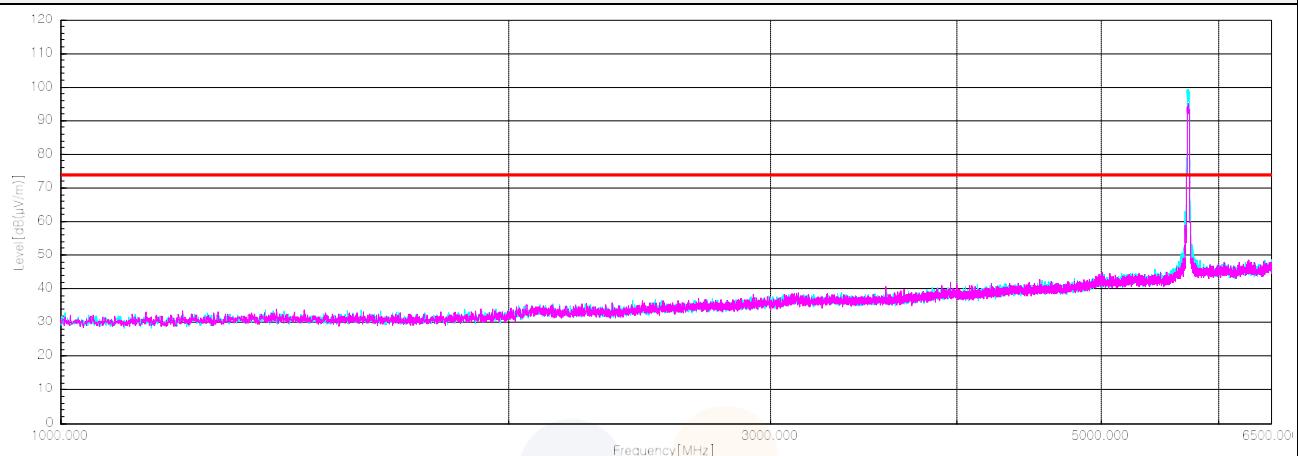

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

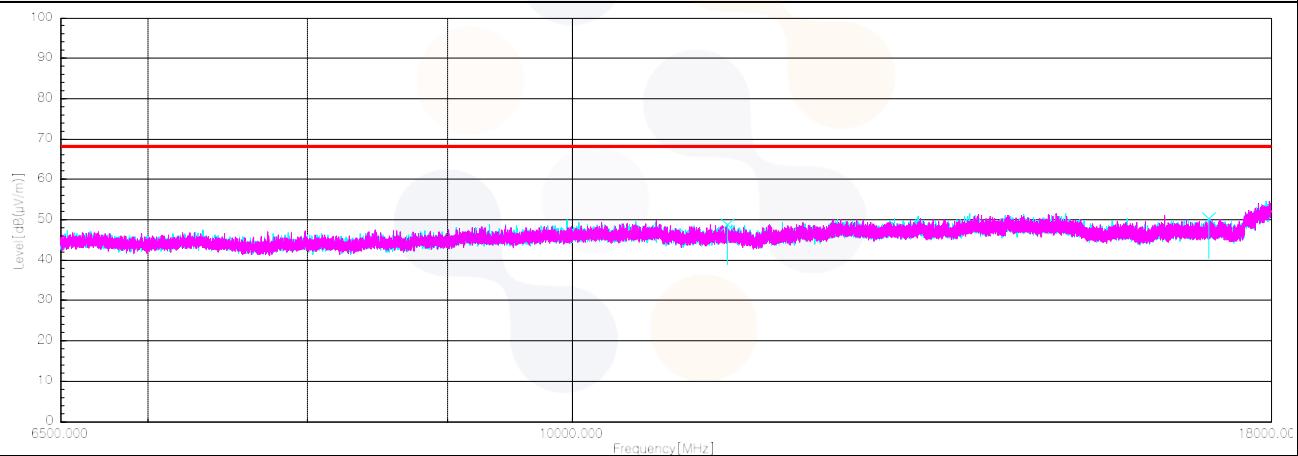

Horizontal/Vertical for 18 GHz ~ 40 GHz

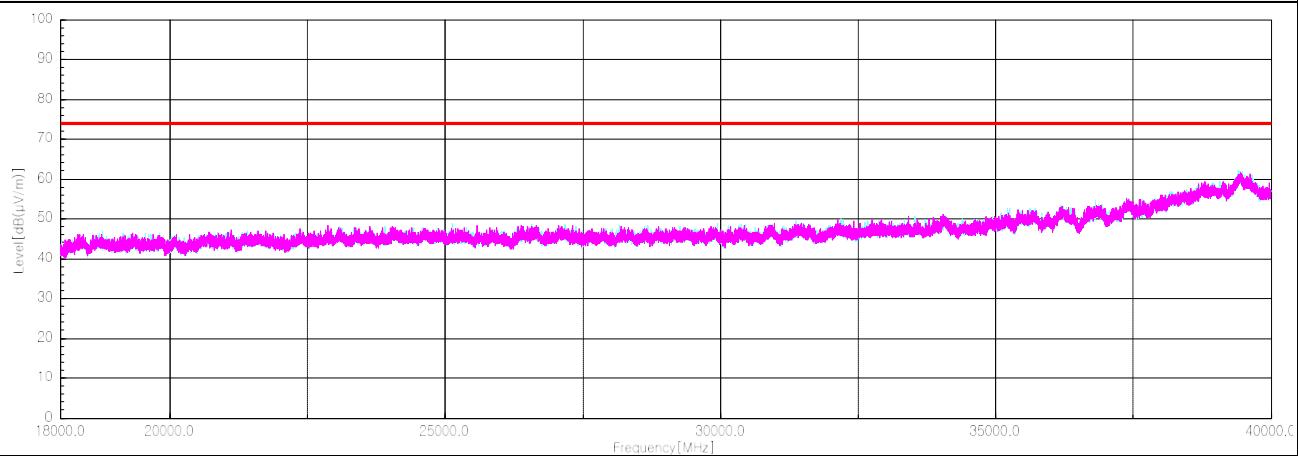

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SRF0132 Page (59) of (69)	 KCTL
---	---	--

802.11a UNII-3

Lowest Channel (5 745 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(µV))	(dB)	(dB)	(dB)	(dB(µV/m))	(dB(µV/m))	(dB)
Peak data								
5 724.93	V	58.00	33.60	-29.98	-	61.62	122.00	60.38
11 210.02 ¹⁾	H	52.90	38.82	-42.71	-	49.01	74.00	24.99
16 771.03	V	50.30	37.46	-38.18	-	49.58	68.20	18.62
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Middle Channel (5 785 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(µV))	(dB)	(dB)	(dB)	(dB(µV/m))	(dB(µV/m))	(dB)
Peak data								
11 455.73 ¹⁾	V	52.10	38.89	-42.72	-	48.27	74.00	25.73
14 846.70	H	53.40	40.01	-40.71	-	52.70	68.20	15.50
17 080.77	V	49.90	37.46	-37.23	-	50.13	68.20	18.07
Average Data								
No spurious emissions were detected within 20 dB of the limit.								


Highest Channel (5 825 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(µV))	(dB)	(dB)	(dB)	(dB(µV/m))	(dB(µV/m))	(dB)
Peak data								
5 852.69	V	50.90	34.21	-29.77	-	55.34	116.10	60.76
11 615.97 ¹⁾	H	52.40	38.57	-42.60	-	48.37	74.00	25.63
17 126.38	V	50.30	37.40	-37.21	-	50.49	68.20	17.71
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

802.11a UNII-3


Lowest Channel (5 745 MHz)

Horizontal/Vertical for Band-edge

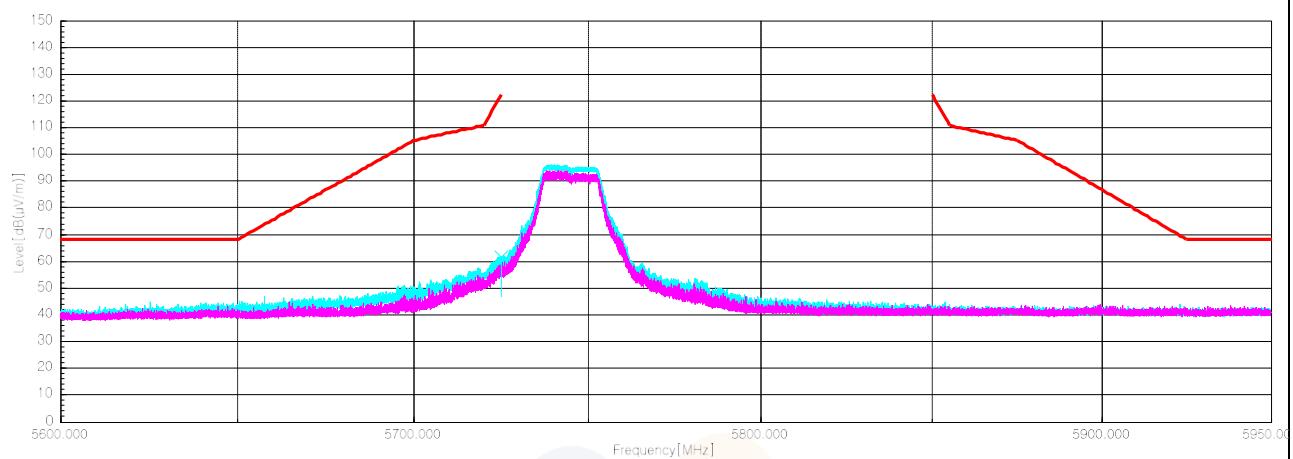

Highest Channel (5 825 MHz)

Horizontal/Vertical for Band-edge

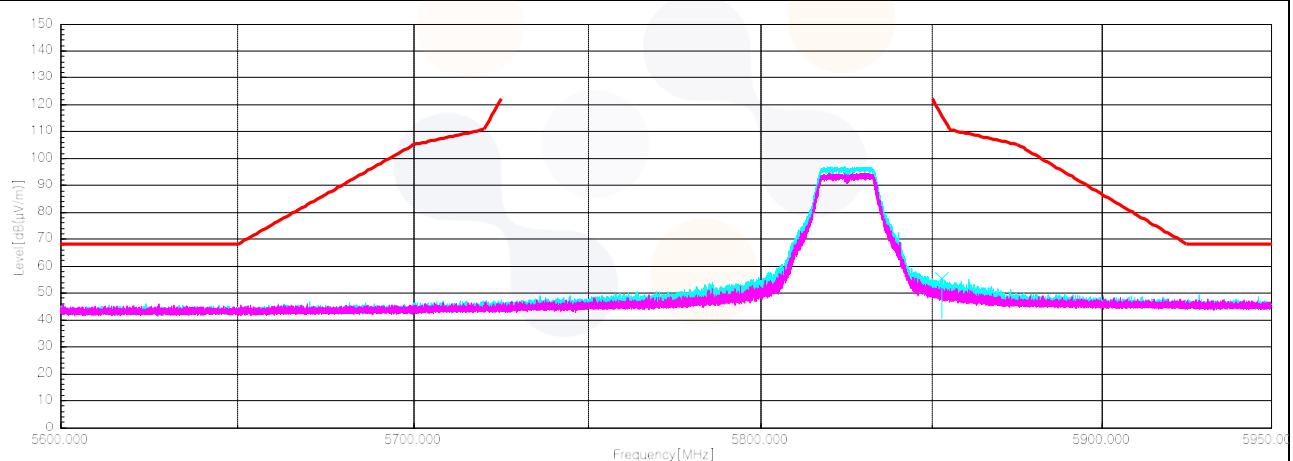

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SRF0132 Page (61) of (69)	 eurofins KCTL
---	--	---

802.11n HT20 UNII-3

Lowest Channel (5 745 MHz)

Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(µV))	(dB)	(dB)	(dB)	(dB(µV/m))	(dB(µV/m))	(dB)
Peak data								
5 724.88	V	59.20	33.60	-29.98	-	62.82	121.90	59.08
11 792.30 ¹⁾	V	52.70	38.50	-42.42	-	48.78	74.00	25.22
17 260.55	H	49.50	37.84	-37.13	-	50.21	68.20	17.99
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Middle Channel (5 785 MHz)


Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(µV))	(dB)	(dB)	(dB)	(dB(µV/m))	(dB(µV/m))	(dB)
Peak data								
11 486.40 ¹⁾	V	52.90	38.83	-42.72	-	49.01	74.00	24.99
12 153.02 ¹⁾	H	53.50	39.11	-41.79	-	50.82	74.00	23.18
17 129.45	V	49.70	37.40	-37.21	-	49.89	68.20	18.31
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Highest Channel (5 825 MHz)


Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(µV))	(dB)	(dB)	(dB)	(dB(µV/m))	(dB(µV/m))	(dB)
Peak data								
5 850.92	V	52.50	34.20	-29.77	-	56.93	121.30	64.37
11 756.65 ¹⁾	H	53.60	38.50	-42.46	-	49.64	74.00	24.36
17 215.70	V	49.50	37.63	-37.16	-	49.97	68.20	18.23
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

802.11n HT20 UNII-3

Lowest Channel (5 745 MHz)

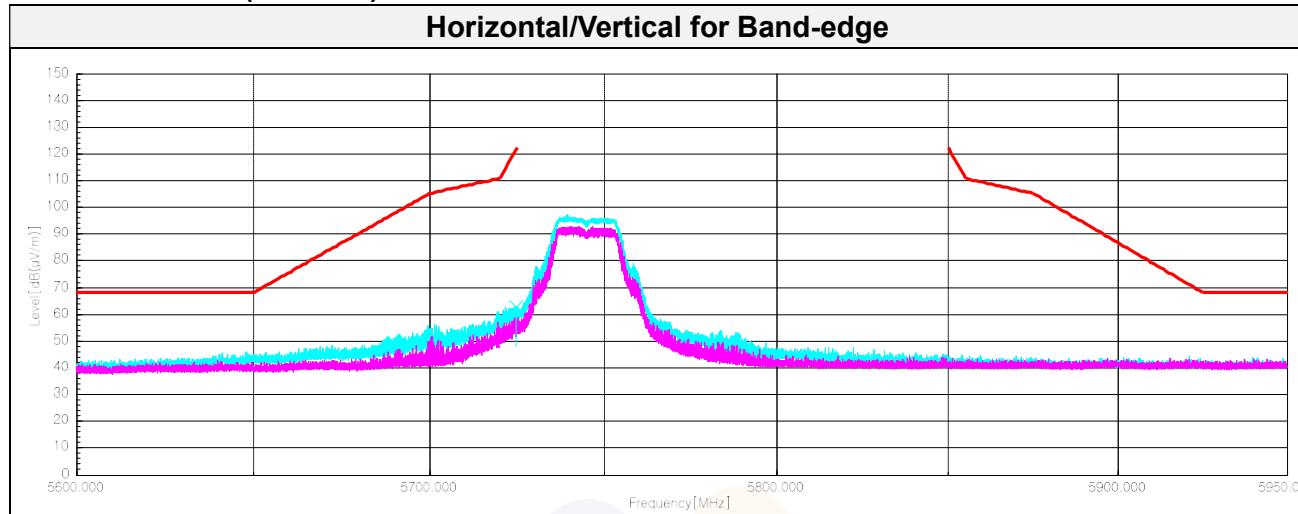

Highest Channel (5 825 MHz)

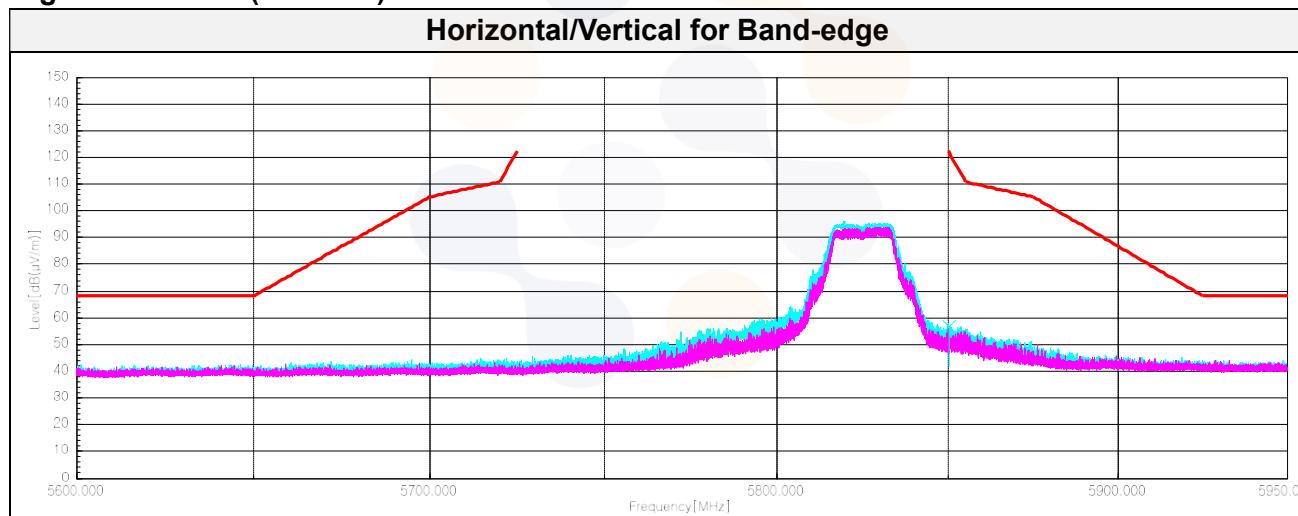


Plot of Harmonics and Spurious Emissions


In order to simplify the report, attached plots were only the lowest margin condition

802.11a_UNII-3: Middle Channel (5 785 MHz)


Horizontal/Vertical for 1 GHz ~ 6.5 GHz

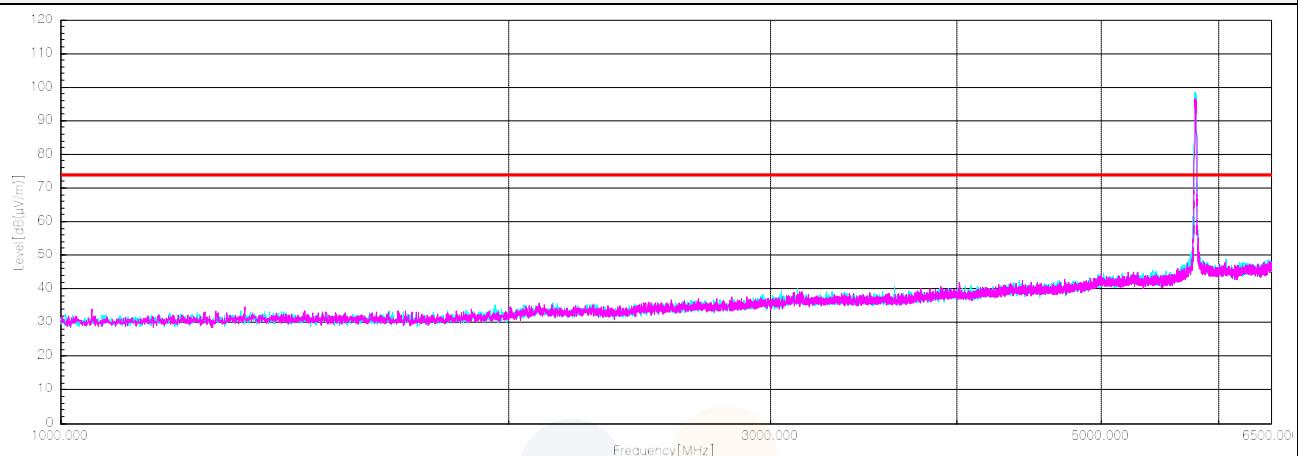

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

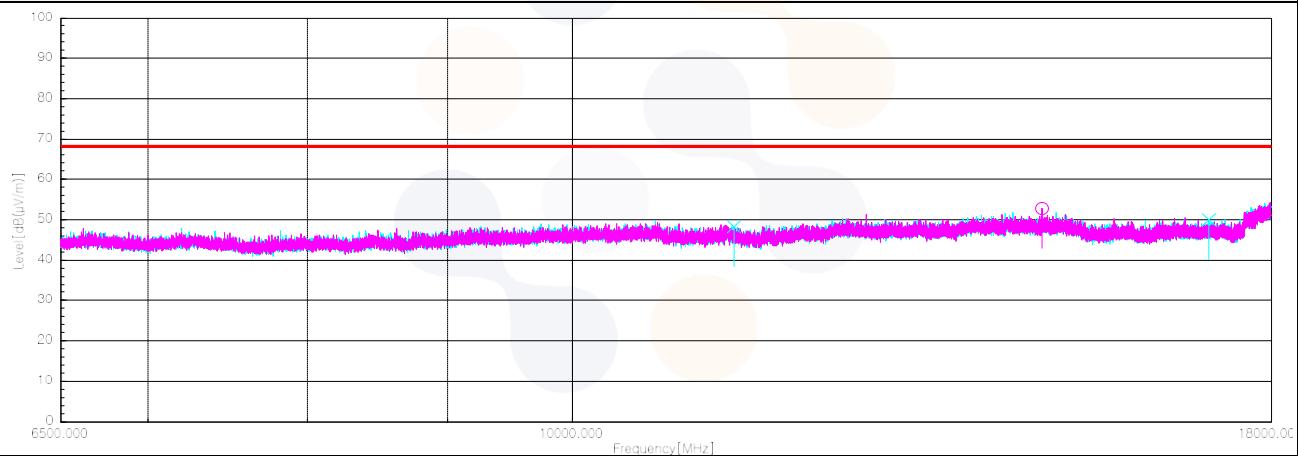

Horizontal/Vertical for 18 GHz ~ 40 GHz

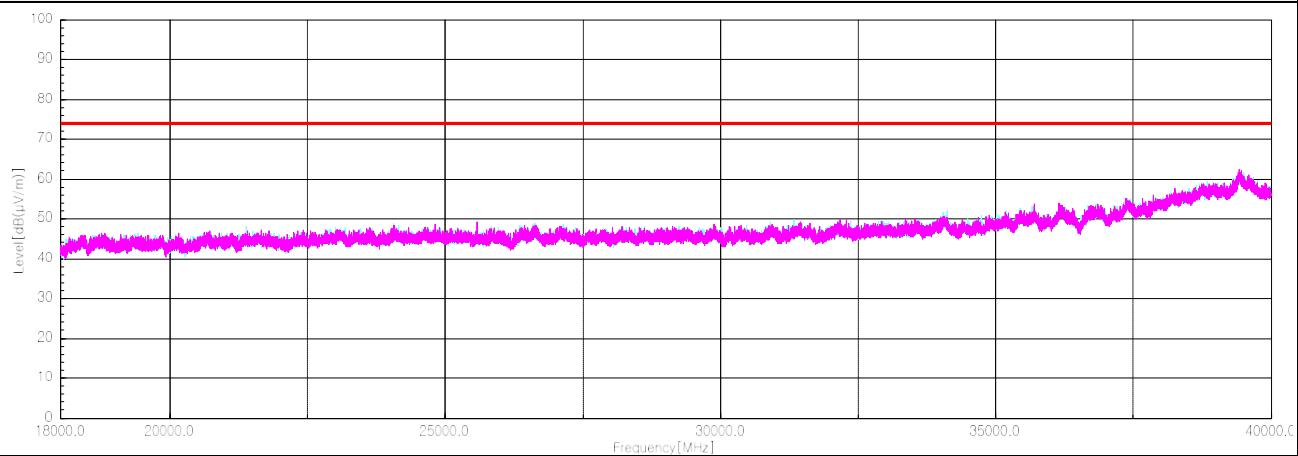


Spurious Emission for Simultaneous Tx Condition

Case	WLAN 5 GHz	Bluetooth
Mode	802.11a	BDR
Channel	64	78
Frequency	5 320 MHz	2 480 MHz
Data Rate	6 Mbps	DH1


Notes.

The lowest margin condition among the channels and modes were selected for test.


Frequency	Pol.	Reading	Ant. Factor	Amp.+Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 845.53 ¹⁾	V	71.50	28.56	-46.40	-	53.66	74.00	20.34
4 924.40 ¹⁾	V	55.00	32.85	-42.42	-	45.43	74.00	28.57
7 408.88 ¹⁾	V	52.40	36.48	-40.69	-	48.19	74.00	25.81
10 589.02	V	53.70	38.80	-42.38	-	50.12	74.00	23.88
15 950.32 ¹⁾	V	52.40	37.70	-39.74	-	50.36	74.00	23.64
Average Data								
2 845.53 ¹⁾	V	61.12	28.56	-46.40	-	43.28	54.00	10.72

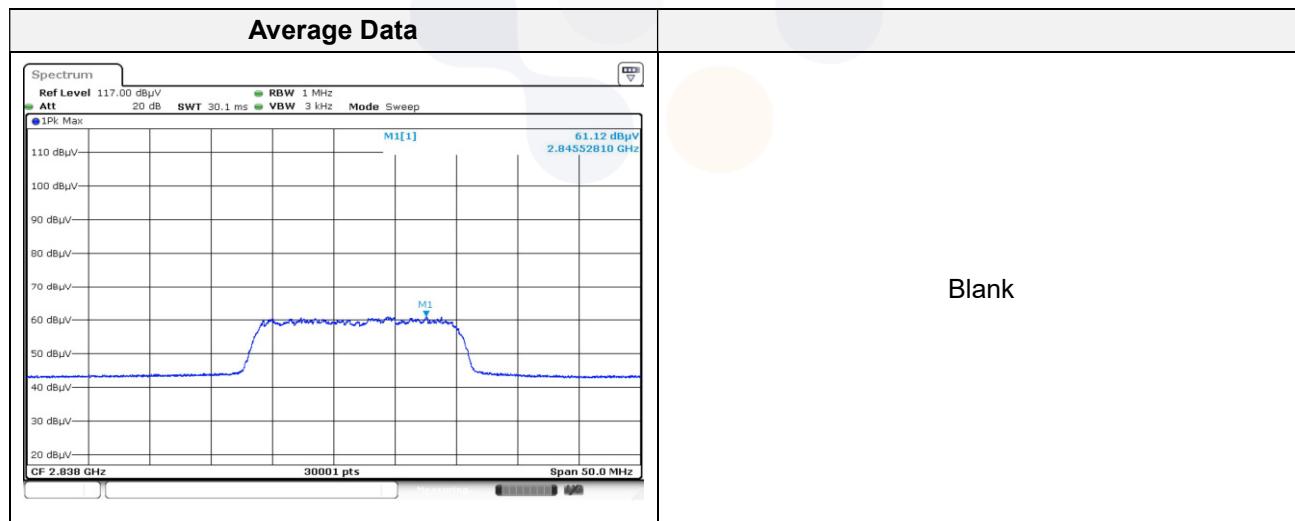


Horizontal/Vertical for 1 GHz ~ 3.5 GHz

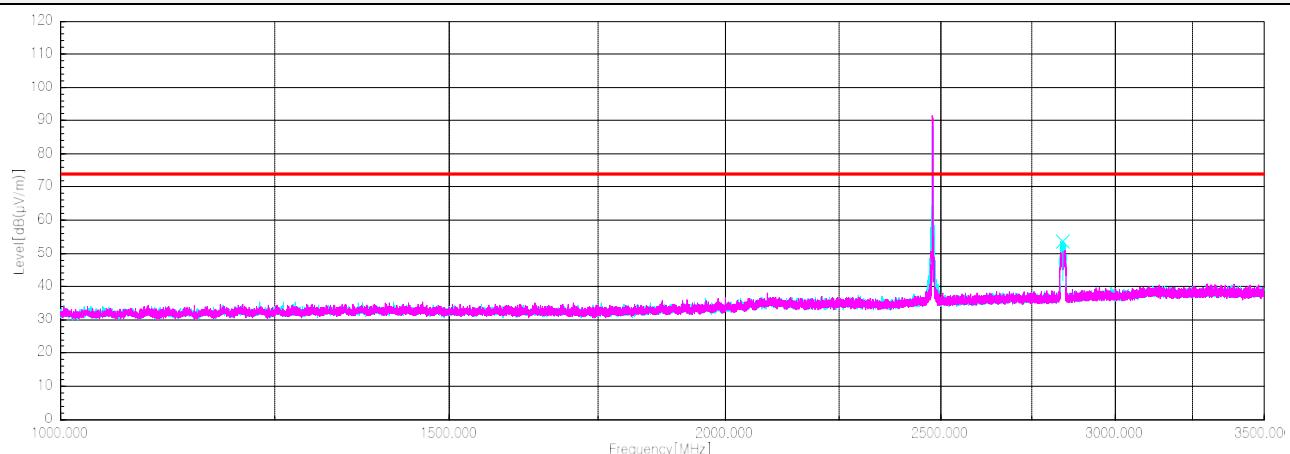


Horizontal/Vertical for 3.5 GHz ~ 5 GHz

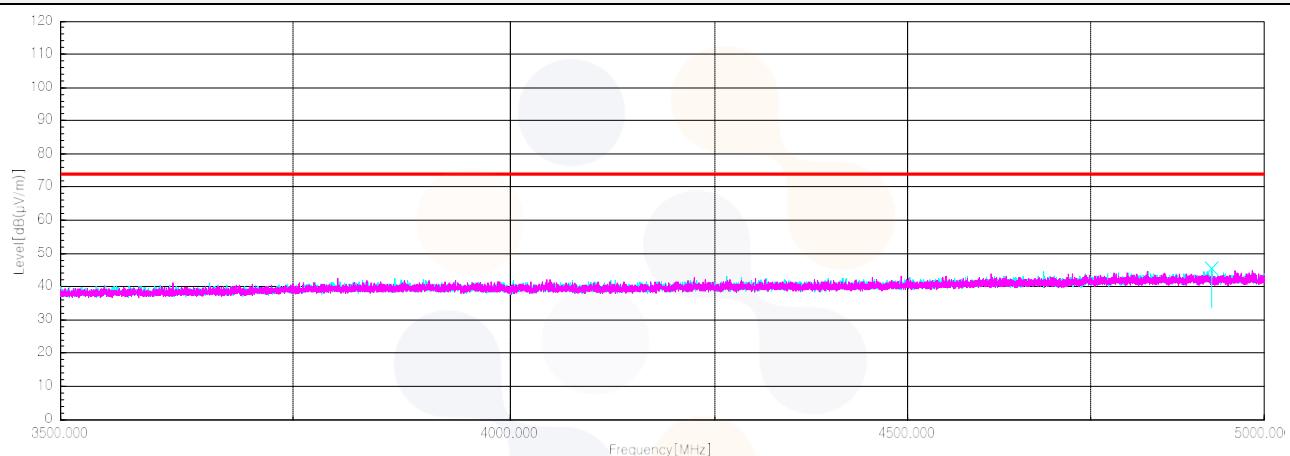


Horizontal/Vertical for 5 GHz ~ 6.5 GHz

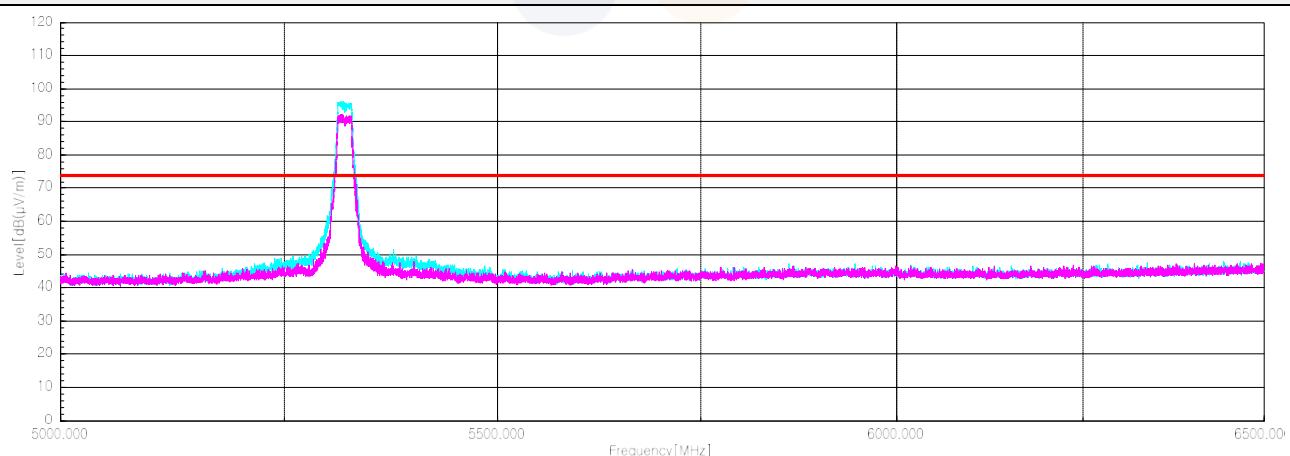

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

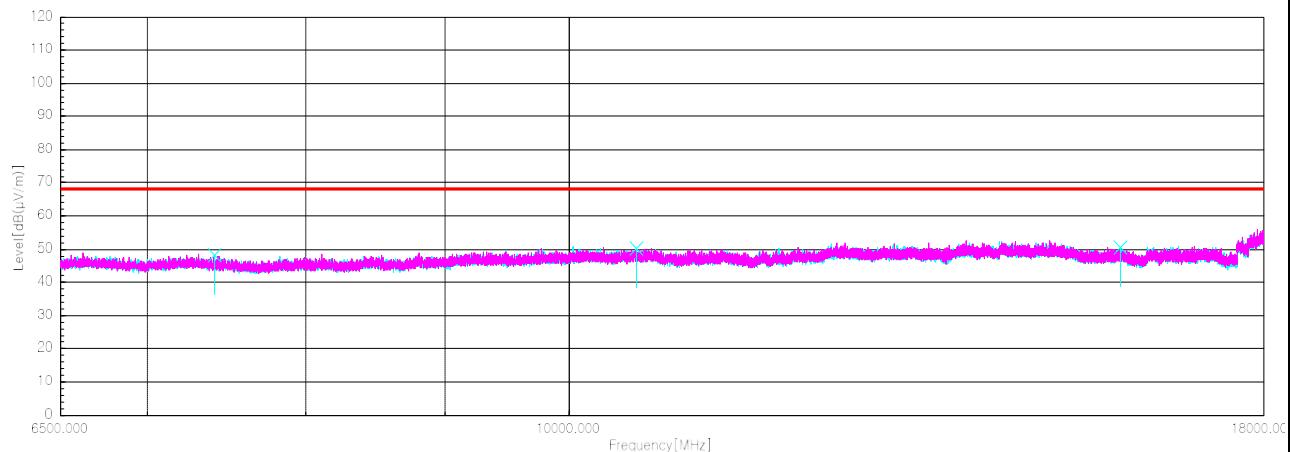


Horizontal/Vertical for 18 GHz ~ 40 GHz

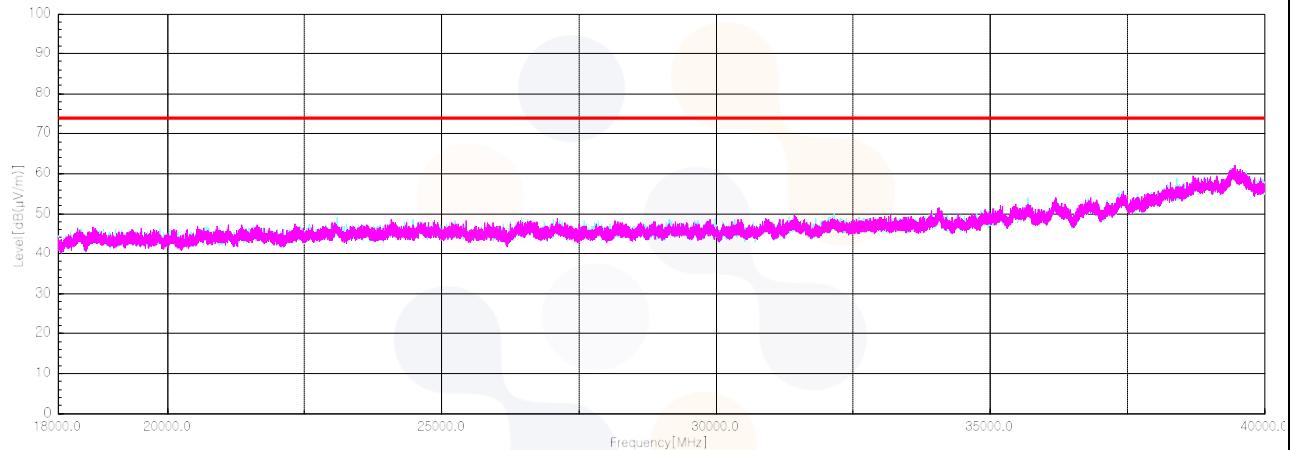

7.7. AC Conducted emission

Test setup

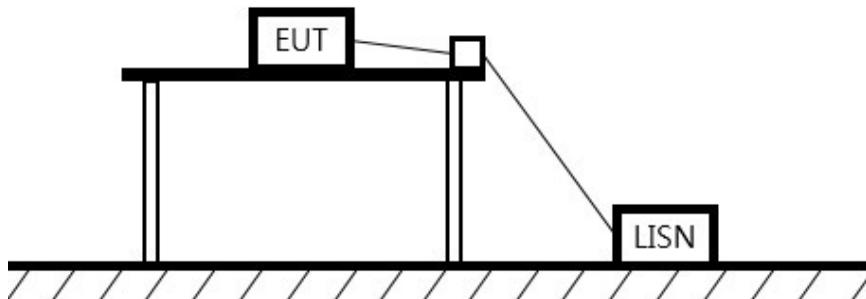

Limit

§15.407

According to 15.207(a) and RSS-Gen (8.8), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50uH/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.


Frequency of Emission (MHz)	Conducted limit (dB μ V/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

Measurement procedure

1. The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
2. Each current-carrying conductor of the EUT power cord was individually connected through a 50Ω/50µH LISN, which is an input transducer to a spectrum analyzer or an EMI/Field Intensity Meter, to the input power source.
3. Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
4. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment is the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
5. The measurements were made with the detector set to peak amplitude within a bandwidth of 10 kHz or to quasi-peak and average within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.

Test results

Worst case: 802.11a / UNII-1_5 240 MHz

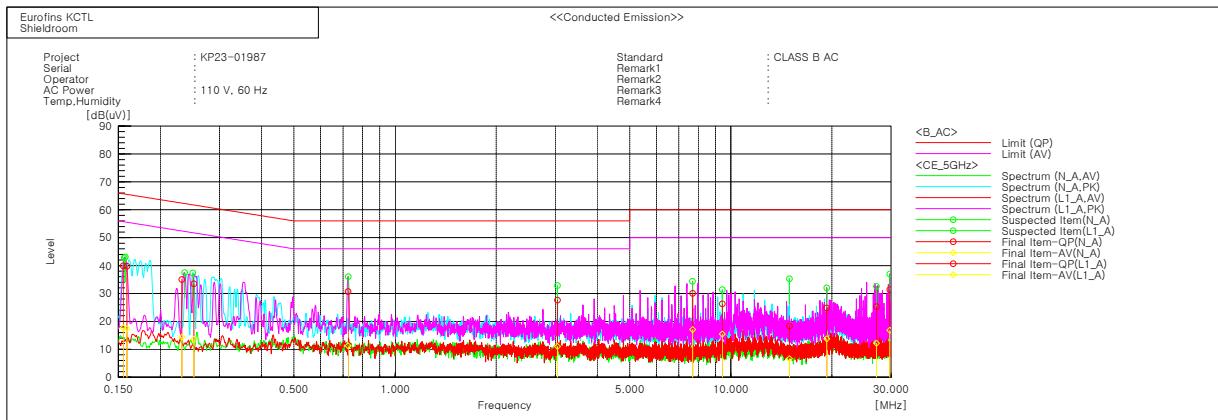

Final Result

--- N_A Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f.	Result QP [dB]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.15502	30.0	7.8	9.9	39.9	17.7	65.7	55.7	25.8	38.0
2	0.25161	23.7	3.7	9.8	33.5	13.5	61.7	51.7	28.2	38.2
3	3.04557	17.8	1.1	9.9	27.7	11.0	56.0	46.0	28.3	35.0
4	9.4309	16.1	5.2	10.2	26.3	15.4	60.0	50.0	33.7	34.6
5	14.94129	7.9	-3.9	10.5	18.4	6.6	60.0	50.0	41.6	43.4
6	27.13307	14.3	1.2	11.0	25.3	12.2	60.0	50.0	34.7	37.8

--- L1_A Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f.	Result QP [dB]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.159	29.8	7.4	10.0	39.8	17.4	65.5	55.5	25.7	38.1
2	0.23181	25.2	4.5	9.8	35.0	14.3	62.4	52.4	27.4	38.1
3	0.72429	20.8	1.4	9.9	30.7	11.3	56.0	46.0	25.3	34.7
4	7.69177	19.9	7.0	10.1	30.0	17.1	60.0	50.0	30.0	32.9
5	19.30063	14.2	3.1	10.7	24.9	13.8	60.0	50.0	35.1	36.2
6	29.74439	20.3	5.7	11.1	31.4	16.8	60.0	50.0	28.6	33.2

8. Measurement equipment

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Spectrum Analyzer	R&S	FSV3044	101427	24.03.28*
Spectrum Analyzer	R&S	FSVA40	101574	24.04.24*
Attenuator	HUBER+SUHNER	6610_SK-50-1 /199_NE	ATT10	24.04.10*
DC Power Supply	AGILENT	E3632A	MY40000265	24.04.27*
Spectrum Analyzer	R&S	FSV40	100988	23.07.11
PSA Spectrum Analyzer	Agilent	E4440A	MY46186407	24.03.22
Broadband Pre Amplifier	SCHWARZBECK	BBV9718D	53	24.03.17
Low Noise Amplifier	TESTEK	TK-PA18H	220123-L	23.12.02
Low Noise Amplifier	TESTEK	TK-PA1840H	220133-L	23.12.02
Amplifier	SONOMA INSTRUMENT	310N	421821	23.12.14
Horn Antenna	SCHWARZBECK	BBHA9120D	2764	23.12.06
Horn Antenna	SCHWARZBECK	BBHA9170	1267	23.12.05
Bi-log Antenna	Teseq GmbH	CBL 6112D	63756	24.11.17
Loop Antenna	R&S	HFH2-Z2	100355	24.08.10
High Pass Filter	Wainwright Instruments GmbH	WHKX8-5655-6500-18000-40SS	SN7	23.12.14
TWO-LINE V-Network	R&S	ENV216	101358	23.09.29
EMI Test Receiver	R&S	ESCI3	100001	23.08.18
Signal Generator	R&S	SMB100A	176206	24.01.19

* Tests related to this equipment were progressed after the calibration was completed.

End of test report