



SAR EVALUATION REPORT

Applicant Name:
 Samsung Electronics Co., Ltd.

Date of Testing:
 11/23/18 - 1/14/19
Test Site/Location:
 PCTEST Lab, Columbia, MD, USA
Document Serial No.:
 1M1811190204-01-R1.A3L

FCC ID: A3LSMS260DL

APPLICANT: SAMSUNG ELECTRONICS CO., LTD.

DUT Type: Portable Handset
Application Type: Certification
FCC Rule Part(s): CFR §2.1093
Model: SM-S260DL

Equipment Class	Band & Mode	Tx Frequency	SAR		
			1g Head (W/kg)	1g Body-Worn (W/kg)	1g Hotspot (W/kg)
PCE	GSM/GPRS/EDGE 850	824.20 - 848.80 MHz	0.61	0.46	1.04
PCE	GSM/GPRS/EDGE 1900	1850.20 - 1909.80 MHz	0.52	0.38	0.80
PCE	UMTS 850	826.40 - 846.60 MHz	0.46	0.35	0.53
PCE	UMTS 1750	1712.4 - 1752.6 MHz	0.50	0.51	1.23
PCE	UMTS 1900	1852.4 - 1907.6 MHz	0.80	0.53	0.71
PCE	LTE Band 71	665.5 - 695.5 MHz	0.36	0.43	0.62
PCE	LTE Band 12	699.7 - 715.3 MHz	0.39	0.47	0.62
PCE	LTE Band 13	779.5 - 784.5 MHz	0.26	0.31	0.35
PCE	LTE Band 5 (Cell)	824.7 - 848.3 MHz	0.66	0.52	0.74
PCE	LTE Band 66 (AWS)	1710.7 - 1779.3 MHz	0.69	0.49	1.36
PCE	LTE Band 4 (AWS)	1710.7 - 1754.3 MHz	N/A	N/A	N/A
PCE	LTE Band 2 (PCS)	1850.7 - 1909.3 MHz	0.84	0.58	0.68
DTS	2.4 GHz WLAN	2412 - 2462 MHz	1.11	0.28	0.63
DSS/DTS	Bluetooth	2402 - 2480 MHz	N/A	N/A	N/A
Simultaneous SAR per KDB 690783 D01v01r03:			1.57	0.86	1.50

Note: This revised Test Report (S/N: 1M1811190204-01-R1.A3L) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.7 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.

Randy Ortanez
 President



The SAR Tick is an initiative of the Mobile & Wireless Forum (MWF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MWF. Further details can be obtained by emailing: sartick@mwfai.info.

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 - 1/14/2019	DUT Type: Portable Handset	Page 1 of 84	

TABLE OF CONTENTS

1	DEVICE UNDER TEST	3
2	LTE INFORMATION	10
3	INTRODUCTION	11
4	DOSIMETRIC ASSESSMENT	12
5	DEFINITION OF REFERENCE POINTS	13
6	TEST CONFIGURATION POSITIONS	14
7	RF EXPOSURE LIMITS	17
8	FCC MEASUREMENT PROCEDURES.....	18
9	RF CONDUCTED POWERS	23
10	SYSTEM VERIFICATION.....	48
11	SAR DATA SUMMARY	51
12	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	64
13	SAR MEASUREMENT VARIABILITY	78
14	EQUIPMENT LIST.....	80
15	MEASUREMENT UNCERTAINTIES.....	81
16	CONCLUSION.....	82
17	REFERENCES	83
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES		
APPENDIX D: SAR TISSUE SPECIFICATIONS		
APPENDIX E: SAR SYSTEM VALIDATION		
APPENDIX F: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS		
APPENDIX G: POWER REDUCTION VERIFICATION		

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 2 of 84	

1 DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1750	Voice/Data	1712.4 - 1752.6 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
LTE Band 71	Voice/Data	665.5 - 695.5 MHz
LTE Band 12	Voice/Data	699.7 - 715.3 MHz
LTE Band 13	Voice/Data	779.5 - 784.5 MHz
LTE Band 5 (Cell)	Voice/Data	824.7 - 848.3 MHz
LTE Band 66 (AWS)	Voice/Data	1710.7 - 1779.3 MHz
LTE Band 4 (AWS)	Voice/Data	1710.7 - 1754.3 MHz
LTE Band 2 (PCS)	Voice/Data	1850.7 - 1909.3 MHz
2.4 GHz WLAN	Voice/Data	2412 - 2462 MHz
Bluetooth	Data	2402 - 2480 MHz

1.2 Power Reduction for SAR

This device utilizes a single step power reduction mechanism for SAR compliance under portable hotspot conditions for some wireless modes and bands. All hotspot SAR evaluations for this device were performed at the maximum allowed output power when hotspot is enabled. Detailed descriptions of the power reduction mechanism are included in the operational description.

This device uses an independent fixed level power reduction mechanism for WLAN operations during voice or VoIP held to ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the head SAR positions described in IEEE 1528-2013. Detailed descriptions of the power reduction mechanism are included in the operational description.

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 3 of 84	

1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

1.3.1 Maximum Output Power

Mode / Band		Voice (dBm)	Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
		1 TX Slot	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots
GSM/GPRS/EDGE 850	Maximum	34.0	34.0	31.5	30.0	29.0	28.0	26.0	24.5	23.0
	Nominal	33.0	33.0	30.5	29.0	28.0	27.0	25.0	23.5	22.0
GSM/GPRS/EDGE 1900	Maximum	32.0	32.0	28.5	27.5	26.5	27.0	25.5	24.0	22.5
	Nominal	31.0	31.0	27.5	26.5	25.5	26.0	24.5	23.0	21.5

Mode / Band		Modulated Average (dBm)			
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA	3GPP DC-HSDPA
UMTS Band 5 (850 MHz)	Maximum	23.7	23.7	23.7	23.7
	Nominal	22.7	22.7	22.7	22.7
UMTS Band 4 (1750 MHz)	Maximum	24.7	24.7	24.7	24.7
	Nominal	23.7	23.7	23.7	23.7
UMTS Band 2 (1900 MHz)	Maximum	24.5	24.5	24.5	24.5
	Nominal	23.5	23.5	23.5	23.5

FCC ID: A3LSMS260DL	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 4 of 84	

Mode / Band		Modulated Average (dBm)
LTE Band 71	Maximum	25.2
	Nominal	24.2
LTE Band 12	Maximum	25.2
	Nominal	24.2
LTE Band 13	Maximum	23.5
	Nominal	22.5
LTE Band 5 (Cell)	Maximum	25.2
	Nominal	24.2
LTE Band 66 (AWS)	Maximum	25.2
	Nominal	24.2
LTE Band 4 (AWS)	Maximum	25.2
	Nominal	24.2
LTE Band 2 (PCS)	Maximum	24.8
	Nominal	23.8

Mode / Band		Modulated Average (dBm)
IEEE 802.11b (2.4 GHz)	Maximum	21.0
	Nominal	20.0
IEEE 802.11g (2.4 GHz)	Maximum	20.0
	Nominal	19.0
IEEE 802.11n (2.4 GHz)	Maximum	20.0
	Nominal	19.0

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 5 of 84	

Mode / Band		Modulated Average (dBm)
Bluetooth	Maximum	8.5
	Nominal	7.5
Bluetooth EDR	Maximum	7.0
	Nominal	6.0
Bluetooth LE	Maximum	4.0
	Nominal	3.0

1.3.2 Reduced Output Power

Mode / Band		Modulated Average (dBm)			
		<i>3GPP WCDMA</i>	<i>3GPP HSDPA</i>	<i>3GPP HSUPA</i>	<i>3GPP DC-HSDPA</i>
UMTS Band 2 (1900 MHz)	Maximum	22.5	22.5	22.5	22.5
	Nominal	21.5	21.5	21.5	21.5

Mode / Band		Modulated Average (dBm)
LTE Band 2 (PCS)	Maximum	22.8
	Nominal	21.8

Mode / Band		Modulated Average (dBm)
IEEE 802.11b (2.4 GHz)	Maximum	16.5
	Nominal	15.5
IEEE 802.11g (2.4 GHz)	Maximum	16.5
	Nominal	15.5
IEEE 802.11n (2.4 GHz)	Maximum	16.5
	Nominal	15.5

FCC ID: A3LSMS260DL	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 6 of 84	

1.4 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. The overall diagonal dimension of the device is ≤160 mm and the diagonal display is ≤150 mm. A diagram showing the location of the device antennas can be found in Appendix F.

**Table 1-1
Device Edges/Sides for SAR Testing**

Mode	Back	Front	Top	Bottom	Right	Left
GPRS 850	Yes	Yes	No	Yes	Yes	Yes
GPRS 1900	Yes	Yes	No	Yes	Yes	Yes
UMTS 850	Yes	Yes	No	Yes	Yes	Yes
UMTS 1750	Yes	Yes	No	Yes	Yes	Yes
UMTS 1900	Yes	Yes	No	Yes	Yes	Yes
LTE Band 71	Yes	Yes	No	Yes	Yes	Yes
LTE Band 12	Yes	Yes	No	Yes	Yes	Yes
LTE Band 13	Yes	Yes	No	Yes	Yes	Yes
LTE Band 5 (Cell)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 66 (AWS)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 2 (PCS)	Yes	Yes	No	Yes	Yes	Yes
2.4 GHz WLAN	Yes	Yes	Yes	No	Yes	Yes

Note: Particular DUT edges were not required to be evaluated for wireless router SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v02r01 Section III. The distances between the transmit antennas and the edges of the device are included in the filing.

1.5 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be operating simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures.

**Table 1-2
Simultaneous Transmission Scenarios**

No.	Capable Transmit Configuration	Head	Body-Worn Accessory	Wireless Router	Notes
1	GSM voice + 2.4 GHz Wi-Fi	Yes	Yes	N/A	
2	GSM voice + 2.4 GHz Bluetooth	Yes^	Yes	N/A	^ Bluetooth Tethering is considered
3	UMTS + 2.4 GHz Wi-Fi	Yes	Yes	Yes	
4	UMTS + 2.4 GHz Bluetooth	Yes^	Yes	Yes^	^ Bluetooth Tethering is considered
5	LTE + 2.4 GHz Wi-Fi	Yes	Yes	Yes	
6	LTE + 2.4 GHz Bluetooth	Yes^	Yes	Yes^	^ Bluetooth Tethering is considered
7	GPRS/EDGE + 2.4 GHz Wi-Fi	N/A	N/A	Yes	
8	GPRS/EDGE + 2.4 GHz Bluetooth	N/A	N/A	Yes^	^ Bluetooth Tethering is considered

- 2.4 GHz WLAN, and 2.4 GHz Bluetooth share the same antenna path and cannot transmit simultaneously.

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 7 of 84	

2. All licensed modes share the same antenna path and cannot transmit simultaneously.
3. When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
4. Per the manufacturer, WIFI Direct is not expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Therefore, there are no simultaneous transmission scenarios involving WIFI direct beyond that listed in the above table.
5. This device supports VOLTE.
6. This device supports VoWIFI.

1.6 Miscellaneous SAR Test Considerations

(A) WIFI/BT

Per FCC KDB 447498 D01v06, the 1g SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 3.0$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, Head Bluetooth SAR was not required; $[(7/5) * \sqrt{2.480}] = 2.2 < 3.0$. Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, body-worn Bluetooth SAR was not required; $[(7/15) * \sqrt{2.480}] = 0.7 < 3.0$. Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, hotspot Bluetooth SAR was not required; $[(7/10) * \sqrt{2.480}] = 1.1 < 3.0$. Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

(B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 8 of 84	

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE Band falls completely within an LTE band with a larger transmission frequency range, both LTE bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.

1.7 Guidance Applied

- IEEE 1528-2013
- FCC KDB Publication 941225 D01v03r01, D05v02r04, D06v02r01 (2G/3G/4G and Hotspot)
- FCC KDB Publication 248227 D01v02r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v06 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)
- October 2013 TCB Workshop Notes (GPRS Testing Considerations)

1.8 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 11.

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 9 of 84

LTE Information			
FCC ID	A3LSMS260DL		
Form Factor	Portable Handset		
Frequency Range of each LTE transmission band	LTE Band 71 (665.5 - 695.5 MHz)		
	LTE Band 12 (699.7 - 715.3 MHz)		
	LTE Band 13 (779.5 - 784.5 MHz)		
	LTE Band 5 (Cell) (824.7 - 848.3 MHz)		
	LTE Band 66 (AWS) (1710.7 - 1779.3 MHz)		
	LTE Band 4 (AWS) (1710.7 - 1754.3 MHz)		
	LTE Band 2 (PCS) (1850.7 - 1909.3 MHz)		
Channel Bandwidths	LTE Band 71: 5 MHz, 10 MHz, 15 MHz, 20 MHz		
	LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz		
	LTE Band 13: 5 MHz, 10 MHz		
	LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz		
	LTE Band 66 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz		
	LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz		
Channel Numbers and Frequencies (MHz)	Low	Mid	High
	LTE Band 71: 5 MHz	665.5 (133147)	680.5 (133297)
LTE Band 71: 10 MHz	668 (133172)	680.5 (133297)	693 (133422)
LTE Band 71: 15 MHz	670.5 (133197)	680.5 (133297)	690.5 (133397)
LTE Band 71: 20 MHz	673 (133222)	680.5 (133297)	688 (133372)
LTE Band 12: 1.4 MHz	699.7 (23017)	707.5 (23095)	715.3 (23173)
LTE Band 12: 3 MHz	700.5 (23025)	707.5 (23095)	714.5 (23165)
LTE Band 12: 5 MHz	701.5 (23035)	707.5 (23095)	713.5 (23155)
LTE Band 12: 10 MHz	704 (23060)	707.5 (23095)	711 (23130)
LTE Band 13: 5 MHz	779.5 (23205)	782 (23230)	784.5 (23255)
LTE Band 13: 10 MHz	N/A	782 (23230)	N/A
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)	836.5 (20525)	848.3 (20643)
LTE Band 5 (Cell): 3 MHz	825.5 (20415)	836.5 (20525)	847.5 (20635)
LTE Band 5 (Cell): 5 MHz	826.5 (20425)	836.5 (20525)	846.5 (20625)
LTE Band 5 (Cell): 10 MHz	829 (20450)	836.5 (20525)	844 (20600)
LTE Band 66 (AWS): 1.4 MHz	1710.7 (131979)	1745 (132322)	1779.3 (132665)
LTE Band 66 (AWS): 3 MHz	1711.5 (131987)	1745 (132322)	1778.5 (132657)
LTE Band 66 (AWS): 5 MHz	1712.5 (131997)	1745 (132322)	1777.5 (132647)
LTE Band 66 (AWS): 10 MHz	1715 (132022)	1745 (132322)	1775 (132622)
LTE Band 66 (AWS): 15 MHz	1717.5 (132047)	1745 (132322)	1772.5 (132597)
LTE Band 66 (AWS): 20 MHz	1720 (132072)	1745 (132322)	1770 (132572)
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)	1732.5 (20175)	1754.3 (20393)
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)	1732.5 (20175)	1753.5 (20385)
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)	1732.5 (20175)	1752.5 (20375)
LTE Band 4 (AWS): 10 MHz	1715 (20000)	1732.5 (20175)	1750 (20350)
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)	1732.5 (20175)	1747.5 (20325)
LTE Band 4 (AWS): 20 MHz	1720 (20050)	1732.5 (20175)	1745 (20300)
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)	1880 (18900)	1909.3 (19193)
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)	1880 (18900)	1908.5 (19185)
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)	1880 (18900)	1907.5 (19175)
LTE Band 2 (PCS): 10 MHz	1855 (18650)	1880 (18900)	1905 (19150)
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)	1880 (18900)	1902.5 (19125)
LTE Band 2 (PCS): 20 MHz	1860 (18700)	1880 (18900)	1900 (19100)
UE Category	4		
Modulations Supported in UL	QPSK, 16QAM		
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)	YES		
A-MPR (Additional MPR) disabled for SAR Testing?	YES		
LTE Additional Information	This device does not support full CA features on 3GPP Release 10. All uplink communications are identical to the Release 8 Specifications. The following LTE Release 10 Features are not supported: Carrier Aggregation, Relay, HetNet, Enhanced MIMO, eCIC, WIFI Offloading, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.		

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 10 of 84	

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

Equation 3-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 11 of 84

4 DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASy manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.

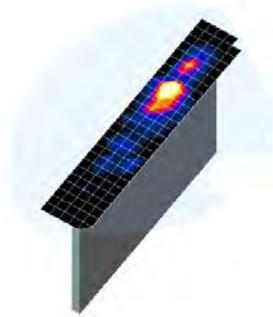


Figure 4-1
Sample SAR Area Scan

Table 4-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
			$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	$\Delta z_{\text{zoom}}(n>1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 22

*Also compliant to IEEE 1528-2013 Table 6

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 12 of 84	

5

DEFINITION OF REFERENCE POINTS

5.1 EAR REFERENCE POINT

Figure 5-2 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (see Figure 5-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].

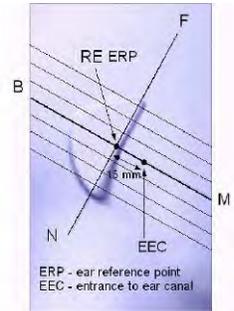


Figure 5-1
Close-Up Side view of ERP

5.2 HANDSET REFERENCE POINTS

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 5-3). The acoustic output was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 5-2
Front, back and side view of SAM Twin Phantom

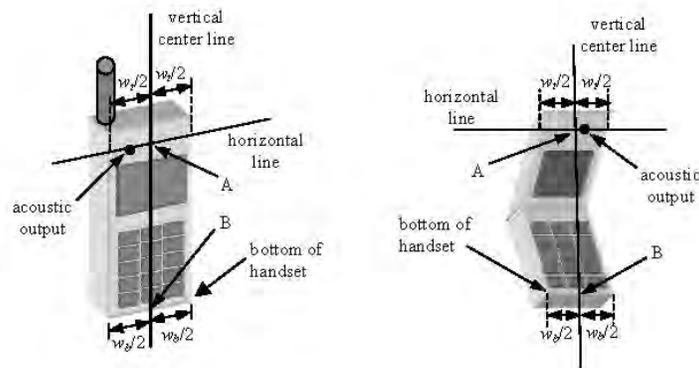


Figure 5-3
Handset Vertical Center & Horizontal Line Reference Points

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 13 of 84

6 TEST CONFIGURATION POSITIONS

6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

6.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

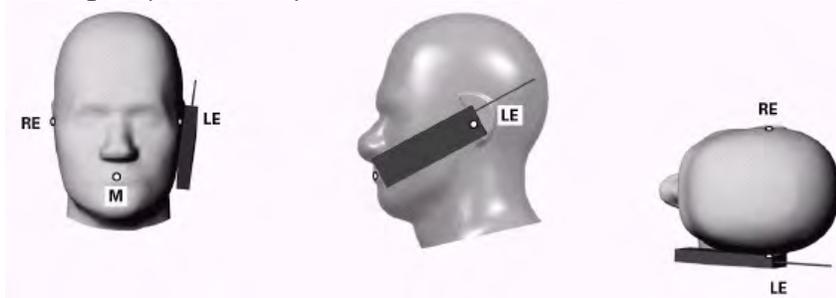


Figure 6-1 Front, Side and Top View of Cheek Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 6-2).

6.3 Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6-2).

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 14 of 84

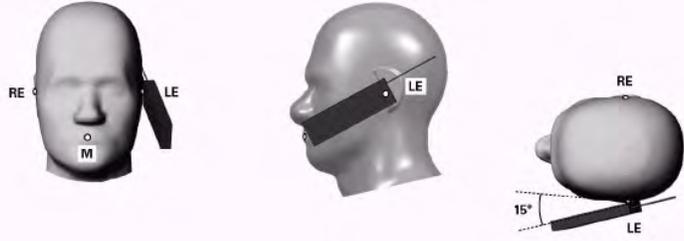


Figure 6-2 Front, Side and Top View of Ear/15° Tilt Position




Figure 6-3 Side view w/ relevant markings

6.4 SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones. Per IEEE 1528-2013, a rotated SAM phantom is necessary to allow probe access to such regions. Both SAM heads of the TwinSAM-Chin20 are rotated 20 degrees around the NF line. Each head can be removed from the table for emptying and cleaning.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04v01r03. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR location identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

6.5 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6-4). Per FCC KDB Publication 648474 D04v01r03, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

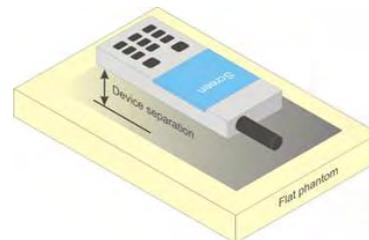


Figure 6-4 Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 15 of 84

contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

6.6 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1g body and 10g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v06, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.

6.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 16 of 84	

7 RF EXPOSURE LIMITS

7.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

7.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 7-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6**

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: A3LSMS260DL	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 17 of 84

8 FCC MEASUREMENT PROCEDURES

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

8.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03r01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is ≤ 1.2 W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

8.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

8.4 SAR Measurement Conditions for UMTS

8.4.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 18 of 84	

8.4.2 Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

8.4.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all “1s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH_n configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH_n, for the highest reported SAR configuration in 12.2 kbps RMC.

8.4.4 SAR Measurements with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

8.4.5 SAR Measurements with Rel 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

8.4.6 SAR Measurement Conditions for DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

8.5 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r04 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 19 of 84	

8.5.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

8.5.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

8.5.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

8.5.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r04:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to $\frac{1}{2}$ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

8.6 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

8.6.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 20 of 84

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

8.6.2 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.

8.6.3 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

8.6.4 OFDM Transmission Mode and SAR Test Channel Selection

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11g then 802.11n, is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

8.6.5 Initial Test Configuration Procedure

For OFDM, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order IEEE 802.11 mode.

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 21 of 84 REV 21.2 M 12/05/2018	

The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 8.6.4).

8.6.6 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required.

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 22 of 84

9.1 GSM Conducted Powers

Table 9-1
Maximum Conducted Power

Maximum Burst-Averaged Output Power										
Band	Channel	Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
		GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	32.83	32.94	30.92	29.66	28.27	27.17	25.02	23.81	22.38
	190	33.02	32.91	30.87	29.76	28.35	27.20	25.01	23.79	22.35
	251	32.96	32.91	30.91	29.64	28.23	27.22	25.03	23.81	22.38
GSM 1900	512	30.41	30.32	27.14	26.48	24.63	25.70	23.52	22.29	20.94
	661	30.39	30.33	27.14	26.19	24.69	25.66	23.48	22.25	20.92
	810	30.40	30.29	27.12	26.48	24.64	25.67	23.53	22.24	20.86

Calculated Maximum Frame-Averaged Output Power										
Band	Channel	Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
		GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	23.80	23.91	24.90	25.40	25.26	18.14	19.00	19.55	19.37
	190	23.99	23.88	24.85	25.50	25.34	18.17	18.99	19.53	19.34
	251	23.93	23.88	24.89	25.38	25.22	18.19	19.01	19.55	19.37
GSM 1900	512	21.38	21.29	21.12	22.22	21.62	16.67	17.50	18.03	17.93
	661	21.36	21.30	21.12	21.93	21.68	16.63	17.46	17.99	17.91
	810	21.37	21.26	21.10	22.22	21.63	16.64	17.51	17.98	17.85

GSM 850	Frame Avg.Targets:	23.97	23.97	24.48	24.74	24.99	17.97	18.98	19.24	18.99
GSM 1900		21.97	21.97	21.48	22.24	22.49	16.97	18.48	18.74	18.49

FCC ID: A3LSMS260DL	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 23 of 84 REV 21.2 M 12/05/2018	

Note:

1. Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
2. GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
3. EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

GSM Class: B
GPRS Multislot class: 33 (Max 4 Tx uplink slots)
EDGE Multislot class: 33 (Max 4 Tx uplink slots)
DTM Multislot Class: N/A

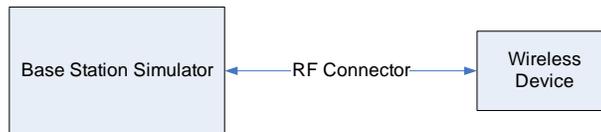


Figure 9-1
Power Measurement Setup

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 24 of 84	

9.2 UMTS Conducted Powers

**Table 9-2
Maximum Conducted Power**

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	22.81	22.69	22.93	24.27	24.14	24.37	24.22	23.92	24.23	-
99		12.2 kbps AMR	22.56	21.39	22.55	24.39	22.55	24.16	24.22	22.22	24.00	-
6	HSDPA	Subtest 1	22.85	22.68	22.95	24.45	24.20	24.42	23.20	22.80	23.17	0
6		Subtest 2	22.89	22.77	22.98	23.77	23.45	23.74	22.30	21.92	22.28	0
6		Subtest 3	22.23	22.12	22.26	22.74	22.47	22.74	21.30	21.03	21.41	0.5
6		Subtest 4	22.26	22.11	22.25	22.82	22.50	22.74	22.37	21.95	22.32	0.5
6	HSUPA	Subtest 1	21.95	21.83	22.02	23.32	23.05	23.43	22.33	21.83	22.18	0
6		Subtest 2	20.25	20.09	20.33	21.65	21.40	21.65	20.32	20.01	20.42	2
6		Subtest 3	21.34	21.18	21.39	22.66	22.42	22.68	21.20	21.00	21.30	1
6		Subtest 4	20.26	20.20	20.35	21.64	21.42	21.66	20.42	20.00	20.30	2
6		Subtest 5	22.87	22.72	22.95	24.44	24.22	24.46	23.20	22.91	23.19	0
8	DC-HSDPA	Subtest 1	22.87	22.81	22.65	24.35	24.20	24.34	23.00	22.90	23.11	0
8		Subtest 2	22.88	22.82	22.73	23.80	23.20	23.85	22.13	22.12	22.40	0
8		Subtest 3	22.38	22.36	22.05	23.15	22.80	22.57	21.51	21.00	21.50	0.5
8		Subtest 4	22.17	22.10	22.01	22.57	22.50	22.60	21.90	21.90	22.15	0.5

FCC ID: A3LSMS260DL	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 25 of 84	


**Table 9-3
Reduced Conducted Power**

3GPP Release Version	Mode	3GPP 34.121 Subtest	PCS Band [dBm]			3GPP MPR [dB]
			9262	9400	9538	
99	WCDMA	12.2 kbps RMC	21.39	21.19	21.51	-
99		12.2 kbps AMR	21.37	21.14	21.49	-
6	HSDPA	Subtest 1	21.85	21.57	21.97	0
6		Subtest 2	22.03	21.73	22.04	0
6		Subtest 3	21.28	21.03	21.40	0.5
6		Subtest 4	22.03	21.75	22.15	0.5
6	HSUPA	Subtest 1	20.83	20.74	21.09	0
6		Subtest 2	19.98	19.77	20.17	2
6		Subtest 3	20.90	20.69	21.07	1
6		Subtest 4	19.97	19.73	20.22	2
6		Subtest 5	21.82	21.66	22.08	0
8	DC-HSDPA	Subtest 1	21.71	21.63	21.95	0
8		Subtest 2	21.74	21.62	21.94	0
8		Subtest 3	21.28	20.87	21.48	0.5
8		Subtest 4	21.88	21.68	22.09	0.5

DC-HSDPA considerations

- 3GPP Specification 34.121-1 Release 8 Ver 8.10.0 was used for DC-HSDPA guidance
- H-Set 12 (QPSK) was confirmed to be used during DC-HSDPA measurements
- The DUT supports UE category 24 for HSDPA

It is expected by the manufacturer that MPR for some HSPA subtests may be up to 2 dB more than specified by 3GPP, but also as low as 0 dB according to the chipset implementation in this model.

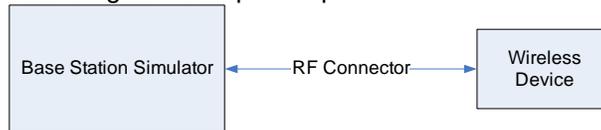

**Figure 9-2
Power Measurement Setup**

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 26 of 84	

9.3 LTE Conducted Powers

9.3.1 LTE Band 71

Table 9-4
LTE Band 71 Conducted Powers - 20 MHz Bandwidth

LTE Band 71 20 MHz Bandwidth				
Modulation	RB Size	RB Offset	Mid Channel	Designed MPR [dB]
			133297 (680.5 MHz)	
			Conducted Power [dBm]	
QPSK	1	0	24.32	0
	1	50	24.05	0
	1	99	24.08	0
	50	0	21.95	2
	50	25	21.83	2
	50	50	21.78	2
	100	0	21.83	2
16QAM	1	0	22.70	2
	1	50	22.70	2
	1	99	22.66	2
	50	0	20.83	3
	50	25	20.77	3
	50	50	20.70	3
	100	0	20.70	3

Note: LTE Band 71 at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 27 of 84

**Table 9-5
LTE Band 71 Conducted Powers - 15 MHz Bandwidth**

LTE Band 71 15 MHz Bandwidth				
Modulation	RB Size	RB Offset	Mid Channel	Designed MPR [dB]
			133297 (680.5 MHz)	
			Conducted Power [dBm]	
QPSK	1	0	24.32	0
	1	36	24.09	0
	1	74	24.08	0
	36	0	21.97	2
	36	18	21.98	2
	36	37	21.90	2
16QAM	75	0	21.94	2
	1	0	22.57	2
	1	36	22.53	2
	1	74	22.38	2
	36	0	20.94	3
	36	18	20.88	3
	36	37	20.83	3
75	0	20.87	3	

Note: LTE Band 71 at 15 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

**Table 9-6
LTE Band 71 Conducted Powers - 10 MHz Bandwidth**

LTE Band 71 10 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Designed MPR [dB]
			133172 (668.0 MHz)	133297 (680.5 MHz)	133422 (693.0 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	24.12	24.29	24.31	0
	1	25	24.07	24.22	24.33	0
	1	49	24.04	24.14	24.31	0
	25	0	21.55	21.66	21.67	2
	25	12	21.57	21.61	21.71	2
	25	25	21.58	21.68	21.72	2
16QAM	50	0	21.56	21.62	21.72	2
	1	0	22.42	22.43	22.64	2
	1	25	22.41	22.46	22.61	2
	1	49	22.48	22.42	22.62	2
	25	0	20.56	20.54	20.68	3
	25	12	20.57	20.56	20.69	3
	25	25	20.54	20.51	20.70	3
50	0	20.52	20.55	20.68	3	

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 28 of 84

**Table 9-7
LTE Band 71 Conducted Powers - 5 MHz Bandwidth**

LTE Band 71 5 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Designed MPR [dB]
			133147 (665.5 MHz)	133297 (680.5 MHz)	133447 (695.5 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	24.18	24.21	24.32	0
	1	12	24.21	24.12	24.27	0
	1	24	24.22	24.13	24.29	0
	12	0	21.91	21.95	21.91	2
	12	6	21.95	21.93	21.88	2
	12	13	21.94	21.90	21.92	2
16QAM	25	0	21.93	21.91	21.89	2
	1	0	22.65	22.56	22.58	2
	1	12	22.71	22.54	22.53	2
	1	24	22.67	22.49	22.54	2
	12	0	20.92	20.89	20.85	3
	12	6	20.94	20.89	20.86	3
	12	13	20.92	20.88	20.87	3
	25	0	20.86	20.89	20.83	3

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 29 of 84

9.3.2

LTE Band 12

Table 9-8
 LTE Band 12 Conducted Powers - 10 MHz Bandwidth
 LTE Band 12
 10 MHz Bandwidth

Modulation	RB Size	RB Offset	Mid Channel	Designed MPR [dB]
			23095 (707.5 MHz)	
			Conducted Power [dBm]	
QPSK	1	0	24.31	0
	1	25	24.35	0
	1	49	24.34	0
	25	0	21.35	2
	25	12	21.41	2
	25	25	21.39	2
	50	0	21.38	2
16QAM	1	0	22.05	2
	1	25	22.10	2
	1	49	22.17	2
	25	0	20.35	3
	25	12	20.45	3
	25	25	20.38	3
	50	0	20.39	3

Note: LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMS260DL	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 30 of 84

**Table 9-9
LTE Band 12 Conducted Powers - 5 MHz Bandwidth**

LTE Band 12 5 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Designed MPR [dB]
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	24.34	24.05	24.15	0
	1	12	24.22	24.10	24.12	0
	1	24	24.17	24.16	24.13	0
	12	0	21.62	21.59	21.60	2
	12	6	21.57	21.59	21.62	2
	12	13	21.58	21.62	21.65	2
16QAM	25	0	21.60	21.57	21.61	2
	1	0	22.05	22.01	22.31	2
	1	12	22.09	22.00	22.13	2
	1	24	22.09	22.01	22.03	2
	12	0	20.59	20.49	20.59	3
	12	6	20.57	20.57	20.62	3
	12	13	20.54	20.55	20.66	3
	25	0	20.63	20.59	20.67	3

**Table 9-10
LTE Band 12 Conducted Powers - 3 MHz Bandwidth**

LTE Band 12 3 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Designed MPR [dB]
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	24.21	24.19	24.29	0
	1	7	24.13	24.21	24.27	0
	1	14	24.07	24.22	24.29	0
	8	0	21.57	21.56	21.56	2
	8	4	21.58	21.56	21.57	2
	8	7	21.55	21.60	21.57	2
	15	0	21.54	21.57	21.58	2
16QAM	1	0	21.93	22.09	21.98	2
	1	7	21.81	22.10	21.95	2
	1	14	21.85	22.05	21.92	2
	8	0	20.57	20.50	20.48	3
	8	4	20.61	20.51	20.50	3
	8	7	20.60	20.52	20.57	3
	15	0	20.43	20.50	20.60	3

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 31 of 84

Table 9-11
LTE Band 12 Conducted Powers -1.4 MHz Bandwidth

LTE Band 12 1.4 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Designed MPR [dB]
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	24.12	24.42	24.11	0
	1	2	24.14	24.40	24.11	0
	1	5	24.12	24.43	24.09	0
	3	0	24.15	24.12	24.16	0
	3	2	24.18	24.18	24.22	0
	3	3	24.14	24.15	24.21	0
	6	0	21.60	21.55	21.52	2
16QAM	1	0	21.90	21.94	22.31	2
	1	2	21.87	21.93	22.35	2
	1	5	21.84	22.01	22.34	2
	3	0	22.15	22.15	22.08	2
	3	2	22.16	22.21	22.15	2
	3	3	22.14	22.21	22.16	2
	6	0	20.64	20.58	20.73	3

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 32 of 84

9.3.3

LTE Band 13

Table 9-12
 LTE Band 13 Conducted Powers - 10 MHz Bandwidth

LTE Band 13 10 MHz Bandwidth				
Modulation	RB Size	RB Offset	Mid Channel	Designed MPR [dB]
			23230 (782.0 MHz)	
			Conducted Power [dBm]	
QPSK	1	0	22.67	0
	1	25	22.64	0
	1	49	22.70	0
	25	0	21.45	1
	25	12	21.49	1
	25	25	21.52	1
	50	0	21.50	1
16QAM	1	0	21.39	1
	1	25	21.43	1
	1	49	21.45	1
	25	0	20.94	2
	25	12	20.98	2
	25	25	21.00	2
	50	0	21.01	2

FCC ID: A3LSMS260DL	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 33 of 84

Table 9-13
LTE Band 13 Conducted Powers - 5 MHz Bandwidth
LTE Band 13
5 MHz Bandwidth

Modulation	RB Size	RB Offset	Mid Channel	Designed MPR [dB]
			23230 (782.0 MHz)	
			Conducted Power [dBm]	
QPSK	1	0	22.61	0
	1	12	22.65	0
	1	24	22.73	0
	12	0	21.70	1
	12	6	21.71	1
	12	13	21.78	1
	25	0	21.72	1
16QAM	1	0	21.78	1
	1	12	21.68	1
	1	24	21.76	1
	12	0	21.21	2
	12	6	21.23	2
	12	13	21.26	2
	25	0	21.23	2

Note: LTE Band 13 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMS260DL	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 34 of 84	

9.3.4

LTE Band 5 (Cell)

Table 9-14
 LTE Band 5 (Cell) Conducted Powers - 10 MHz Bandwidth

LTE Band 5 (Cell) 10 MHz Bandwidth				
Modulation	RB Size	RB Offset	Mid Channel	Designed MPR [dB]
			20525 (836.5 MHz)	
			Conducted Power [dBm]	
QPSK	1	0	24.25	0
	1	25	24.27	0
	1	49	24.26	0
	25	0	22.30	2
	25	12	22.31	2
	25	25	22.33	2
	50	0	22.31	2
16QAM	1	0	22.30	2
	1	25	22.32	2
	1	49	22.31	2
	25	0	21.33	3
	25	12	21.30	3
	25	25	21.35	3
	50	0	21.28	3

Note: LTE Band 5 (Cell) at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMS260DL	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 35 of 84

Table 9-15
LTE Band 5 (Cell) Conducted Powers - 5 MHz Bandwidth

LTE Band 5 (Cell) 5 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Designed MPR [dB]
			20425 (826.5 MHz)	20525 (836.5 MHz)	20625 (846.5 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	24.34	24.30	24.27	0
	1	12	24.34	24.29	24.27	0
	1	24	24.33	24.28	24.25	0
	12	0	22.61	22.47	22.59	2
	12	6	22.62	22.48	22.53	2
	12	13	22.60	22.49	22.51	2
	25	0	22.62	22.47	22.50	2
16QAM	1	0	22.39	22.30	22.27	2
	1	12	22.35	22.36	22.28	2
	1	24	22.36	22.38	22.28	2
	12	0	21.58	21.44	21.50	3
	12	6	21.57	21.48	21.49	3
	12	13	21.61	21.45	21.48	3
	25	0	21.57	21.44	21.54	3

Table 9-16
LTE Band 5 (Cell) Conducted Powers - 3 MHz Bandwidth

LTE Band 5 (Cell) 3 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Designed MPR [dB]
			20415 (825.5 MHz)	20525 (836.5 MHz)	20635 (847.5 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	24.31	24.22	24.34	0
	1	7	24.31	24.21	24.35	0
	1	14	24.30	24.21	24.32	0
	8	0	22.58	22.47	22.54	2
	8	4	22.59	22.46	22.50	2
	8	7	22.58	22.50	22.49	2
	15	0	22.59	22.48	22.48	2
16QAM	1	0	22.44	22.41	22.45	2
	1	7	22.39	22.44	22.40	2
	1	14	22.37	22.47	22.35	2
	8	0	21.52	21.54	21.59	3
	8	4	21.47	21.47	21.55	3
	8	7	21.50	21.50	21.55	3
	15	0	21.55	21.44	21.43	3

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 36 of 84

Table 9-17
LTE Band 5 (Cell) Conducted Powers -1.4 MHz Bandwidth

LTE Band 5 (Cell) 1.4 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Designed MPR [dB]
			20407 (824.7 MHz)	20525 (836.5 MHz)	20643 (848.3 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	24.27	24.30	24.30	0
	1	2	24.26	24.29	24.29	0
	1	5	24.25	24.27	24.30	0
	3	0	24.27	24.25	24.28	0
	3	2	24.30	24.23	24.31	0
	3	3	24.24	24.24	24.26	0
	6	0	22.51	22.47	22.43	2
16QAM	1	0	22.40	22.36	22.38	2
	1	2	22.43	22.30	22.37	2
	1	5	22.45	22.35	22.32	2
	3	0	22.30	22.31	22.31	2
	3	2	22.35	22.30	22.32	2
	3	3	22.38	22.31	22.34	2
	6	0	21.49	21.55	21.49	3

FCC ID: A3LSMS260DL	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 37 of 84

9.3.5

LTE Band 66 (AWS)

Table 9-18
LTE Band 66 (AWS) Conducted Powers - 20 MHz Bandwidth

LTE Band 66 (AWS) 20 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Designed MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	24.36	24.52	24.61	0
	1	50	24.46	24.53	24.63	0
	1	99	24.49	24.56	24.59	0
	50	0	22.16	22.20	22.34	2
	50	25	22.18	22.19	22.31	2
	50	50	22.17	22.19	22.30	2
16QAM	100	0	22.16	22.18	22.29	2
	1	0	23.00	22.93	23.08	2
	1	50	22.97	22.83	23.12	2
	1	99	22.98	22.96	23.09	2
	50	0	21.21	21.18	21.28	3
	50	25	21.14	21.16	21.27	3
	50	50	21.19	21.18	21.28	3
	100	0	21.18	21.22	21.28	3

Table 9-19
LTE Band 66 (AWS) Conducted Powers - 15 MHz Bandwidth

LTE Band 66 (AWS) 15 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Designed MPR [dB]
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	24.61	24.69	24.91	0
	1	36	24.64	24.71	24.89	0
	1	74	24.60	24.68	24.83	0
	36	0	22.25	22.30	22.44	2
	36	18	22.28	22.31	22.44	2
	36	37	22.31	22.31	22.44	2
	75	0	22.27	22.30	22.42	2
16QAM	1	0	23.10	23.00	23.20	2
	1	36	23.13	22.90	23.20	2
	1	74	23.05	22.91	23.18	2
	36	0	21.26	21.29	21.41	3
	36	18	21.28	21.31	21.43	3
	36	37	21.29	21.30	21.43	3
	75	0	21.31	21.29	21.41	3

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 38 of 84

Table 9-20
LTE Band 66 (AWS) Conducted Powers - 10 MHz Bandwidth

LTE Band 66 (AWS) 10 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Designed MPR [dB]
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	24.60	24.67	24.84	0
	1	25	24.61	24.69	24.81	0
	1	49	24.52	24.68	24.80	0
	25	0	21.97	22.00	22.00	2
	25	12	21.99	22.01	22.02	2
	25	25	22.02	22.00	22.00	2
	50	0	22.01	22.00	21.99	2
16QAM	1	0	22.91	22.98	22.99	2
	1	25	22.90	22.99	22.97	2
	1	49	22.92	22.97	22.98	2
	25	0	21.00	21.00	21.09	3
	25	12	21.03	21.02	21.14	3
	25	25	21.05	21.01	21.12	3
	50	0	20.98	21.02	21.15	3

Table 9-21
LTE Band 66 (AWS) Conducted Powers - 5 MHz Bandwidth

LTE Band 66 (AWS) 5 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Designed MPR [dB]
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	24.60	24.58	24.67	0
	1	12	24.65	24.60	24.63	0
	1	24	24.67	24.60	24.66	0
	12	0	22.30	22.25	22.34	2
	12	6	22.31	22.24	22.37	2
	12	13	22.30	22.26	22.35	2
	25	0	22.29	22.26	22.35	2
16QAM	1	0	22.97	22.75	23.11	2
	1	12	23.01	22.80	23.10	2
	1	24	23.00	23.00	23.12	2
	12	0	21.31	21.22	21.25	3
	12	6	21.32	21.22	21.25	3
	12	13	21.31	21.23	21.25	3
	25	0	21.24	21.30	21.24	3

FCC ID: A3LSMS260DL	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 39 of 84	

Table 9-22
LTE Band 66 (AWS) Conducted Powers - 3 MHz Bandwidth

LTE Band 66 (AWS) 3 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Designed MPR [dB]
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	24.59	24.52	24.72	0
	1	7	24.60	24.56	24.74	0
	1	14	24.63	24.53	24.70	0
	8	0	22.29	22.20	22.36	2
	8	4	22.30	22.20	22.34	2
	8	7	22.30	22.24	22.36	2
	15	0	22.29	22.20	22.35	2
16QAM	1	0	23.01	22.90	22.98	2
	1	7	22.94	22.90	23.00	2
	1	14	22.93	22.88	22.97	2
	8	0	21.23	21.30	21.48	3
	8	4	21.30	21.17	21.45	3
	8	7	21.29	21.15	21.47	3
	15	0	21.27	21.16	21.35	3

Table 9-23
LTE Band 66 (AWS) Conducted Powers -1.4 MHz Bandwidth

LTE Band 66 (AWS) 1.4 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Designed MPR [dB]
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	24.92	24.78	24.90	0
	1	2	24.91	24.84	24.90	0
	1	5	24.94	24.80	24.87	0
	3	0	24.62	24.61	24.68	0
	3	2	24.67	24.67	24.77	0
	3	3	24.65	24.65	24.70	0
	6	0	22.33	22.29	22.40	2
16QAM	1	0	22.97	22.96	23.00	2
	1	2	22.96	22.94	23.02	2
	1	5	23.00	23.00	23.06	2
	3	0	23.10	23.10	23.11	2
	3	2	23.13	23.17	23.15	2
	3	3	23.10	23.15	23.14	2
	6	0	21.32	21.30	21.30	3

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 40 of 84

9.3.6

LTE Band 2 (PCS)

Table 9-24
LTE Band 2 (PCS) Conducted Powers - 20 MHz Bandwidth

LTE Band 2 (PCS) 20 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Designed MPR [dB]
			18700 (1860.0 MHz)	18900 (1880.0 MHz)	19100 (1900.0 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	23.67	23.71	23.88	0
	1	50	23.75	23.78	24.00	0
	1	99	23.81	23.76	23.98	0
	50	0	22.45	22.33	22.61	1
	50	25	22.48	22.35	22.64	1
	50	50	22.49	22.35	22.63	1
16QAM	100	0	22.48	22.34	22.63	1
	1	0	22.15	22.17	22.36	1
	1	50	22.16	22.22	22.39	1
	1	99	22.11	22.25	22.40	1
	50	0	21.42	21.26	21.60	2
	50	25	21.47	21.29	21.57	2
	50	50	21.48	21.39	21.56	2
	100	0	21.47	21.32	21.64	2

Table 9-25
LTE Band 2 (PCS) Conducted Powers - 15 MHz Bandwidth

LTE Band 2 (PCS) 15 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Designed MPR [dB]
			18675 (1857.5 MHz)	18900 (1880.0 MHz)	19125 (1902.5 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	23.90	23.67	24.10	0
	1	36	23.89	23.71	24.13	0
	1	74	23.92	23.73	24.08	0
	36	0	22.47	22.33	22.68	1
	36	18	22.48	22.33	22.69	1
	36	37	22.45	22.37	22.74	1
16QAM	75	0	22.47	22.30	22.70	1
	1	0	22.21	22.10	22.70	1
	1	36	22.19	22.24	22.74	1
	1	74	22.27	22.20	22.75	1
	36	0	21.45	21.26	21.71	2
	36	18	21.53	21.29	21.71	2
	36	37	21.53	21.30	21.69	2
	75	0	21.52	21.29	21.68	2

FCC ID: A3LSMS260DL	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 41 of 84

Table 9-26
LTE Band 2 (PCS) Conducted Powers - 10 MHz Bandwidth

LTE Band 2 (PCS) 10 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Designed MPR [dB]
			18650 (1855.0 MHz)	18900 (1880.0 MHz)	19150 (1905.0 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	23.83	23.72	24.01	0
	1	25	23.84	23.74	23.97	0
	1	49	23.89	23.76	24.00	0
	25	0	22.10	22.00	22.30	1
	25	12	22.12	22.01	22.29	1
	25	25	22.11	22.00	22.28	1
	50	0	22.10	21.96	22.29	1
16QAM	1	0	22.38	22.21	22.50	1
	1	25	22.36	22.23	22.54	1
	1	49	22.36	22.36	22.55	1
	25	0	21.05	20.90	21.36	2
	25	12	21.10	20.91	21.37	2
	25	25	21.11	20.90	21.40	2
	50	0	21.09	20.95	21.35	2

Table 9-27
LTE Band 2 (PCS) Conducted Powers - 5 MHz Bandwidth

LTE Band 2 (PCS) 5 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Designed MPR [dB]
			18625 (1852.5 MHz)	18900 (1880.0 MHz)	19175 (1907.5 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	23.80	23.67	24.10	0
	1	12	23.85	23.70	24.09	0
	1	24	23.88	23.71	24.15	0
	12	0	22.51	22.30	22.70	1
	12	6	22.52	22.32	22.69	1
	12	13	22.53	22.33	22.75	1
	25	0	22.50	22.29	22.70	1
16QAM	1	0	22.46	22.15	22.67	1
	1	12	22.48	22.16	22.68	1
	1	24	22.49	22.17	22.64	1
	12	0	21.47	21.29	21.70	2
	12	6	21.48	21.28	21.69	2
	12	13	21.49	21.28	21.73	2
	25	0	21.53	21.27	21.71	2

FCC ID: A3LSMS260DL	 PCTEST <small>ENGINEERING LABORATORY, INC.</small>	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 42 of 84	

Table 9-28
LTE Band 2 (PCS) Conducted Powers - 3 MHz Bandwidth

LTE Band 2 (PCS) 3 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Designed MPR [dB]
			18615 (1851.5 MHz)	18900 (1880.0 MHz)	19185 (1908.5 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	23.88	23.64	24.10	0
	1	7	23.87	23.66	24.09	0
	1	14	23.87	23.63	24.10	0
	8	0	22.50	22.33	22.77	1
	8	4	22.49	22.29	22.78	1
	8	7	22.51	22.31	22.79	1
	15	0	22.47	22.31	22.80	1
16QAM	1	0	22.50	22.02	22.56	1
	1	7	22.53	22.01	22.59	1
	1	14	22.49	22.00	22.57	1
	8	0	21.43	21.35	21.74	2
	8	4	21.46	21.34	21.77	2
	8	7	21.44	21.32	21.72	2
	15	0	21.45	21.27	21.70	2

Table 9-29
LTE Band 2 (PCS) Conducted Powers -1.4 MHz Bandwidth

LTE Band 2 (PCS) 1.4 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Designed MPR [dB]
			18607 (1850.7 MHz)	18900 (1880.0 MHz)	19193 (1909.3 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	23.77	23.85	24.15	0
	1	2	23.78	23.84	24.16	0
	1	5	23.75	23.86	24.17	0
	3	0	23.74	23.67	24.09	0
	3	2	23.79	23.69	24.13	0
	3	3	23.77	23.68	24.09	0
	6	0	22.46	22.32	22.77	1
16QAM	1	0	22.24	22.05	22.39	1
	1	2	22.26	22.06	22.36	1
	1	5	22.18	22.01	22.44	1
	3	0	22.21	22.11	22.66	1
	3	2	22.25	22.16	22.68	1
	3	3	22.23	22.18	22.67	1
	6	0	21.49	21.47	21.74	2

FCC ID: A3LSMS260DL	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 43 of 84	

Table 9-30
LTE Band 2 (PCS) Reduced Conducted Powers - 20 MHz Bandwidth

LTE Band 2 (PCS) 20 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Designed MPR [dB]
			18700 (1860.0 MHz)	18900 (1880.0 MHz)	19100 (1900.0 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	21.59	21.75	21.83	0
	1	50	21.69	21.70	21.96	0
	1	99	21.73	21.72	21.92	0
	50	0	20.42	20.32	20.63	1
	50	25	20.48	20.36	20.67	1
	50	50	20.49	20.37	20.65	1
	100	0	20.51	20.35	20.62	1
16QAM	1	0	20.16	20.13	20.35	1
	1	50	20.20	20.19	20.40	1
	1	99	20.23	20.26	20.42	1
	50	0	19.50	19.30	19.55	2
	50	25	19.52	19.28	19.54	2
	50	50	19.54	19.33	19.61	2
	100	0	19.46	19.34	19.67	2

Table 9-31
LTE Band 2 (PCS) Reduced Conducted Powers - 15 MHz Bandwidth

LTE Band 2 (PCS) 15 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Designed MPR [dB]
			18675 (1857.5 MHz)	18900 (1880.0 MHz)	19125 (1902.5 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	21.86	21.75	22.04	0
	1	36	21.84	21.77	22.06	0
	1	74	21.87	21.70	22.03	0
	36	0	20.49	20.33	20.67	1
	36	18	20.53	20.36	20.72	1
	36	37	20.50	20.41	20.74	1
	75	0	20.51	20.38	20.73	1
16QAM	1	0	20.43	20.36	20.67	1
	1	36	20.48	20.42	20.70	1
	1	74	20.49	20.39	20.64	1
	36	0	19.48	19.35	19.72	2
	36	18	19.53	19.34	19.71	2
	36	37	19.56	19.33	19.73	2
	75	0	19.52	19.34	19.73	2

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 44 of 84

Table 9-32
LTE Band 2 (PCS) Reduced Conducted Powers - 10 MHz Bandwidth

LTE Band 2 (PCS) 10 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Designed MPR [dB]
			18650 (1855.0 MHz)	18900 (1880.0 MHz)	19150 (1905.0 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	21.79	21.66	21.97	0
	1	25	21.82	21.70	21.98	0
	1	49	21.85	21.74	21.96	0
	25	0	20.15	19.96	20.31	1
	25	12	20.12	19.97	20.29	1
	25	25	20.10	20.01	20.31	1
	50	0	20.15	20.00	20.32	1
16QAM	1	0	20.37	20.35	20.56	1
	1	25	20.38	20.29	20.62	1
	1	49	20.40	20.34	20.57	1
	25	0	19.10	18.99	19.39	2
	25	12	19.17	18.97	19.41	2
	25	25	19.20	18.99	19.38	2
	50	0	19.15	19.01	19.37	2

Table 9-33
LTE Band 2 (PCS) Reduced Conducted Powers - 5 MHz Bandwidth

LTE Band 2 (PCS) 5 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Designed MPR [dB]
			18625 (1852.5 MHz)	18900 (1880.0 MHz)	19175 (1907.5 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	21.68	21.54	21.95	0
	1	12	21.69	21.55	21.97	0
	1	24	21.74	21.61	21.99	0
	12	0	20.48	20.35	20.77	1
	12	6	20.48	20.31	20.76	1
	12	13	20.45	20.36	20.75	1
	25	0	20.46	20.34	20.73	1
16QAM	1	0	20.28	20.16	20.55	1
	1	12	20.22	20.17	20.48	1
	1	24	20.31	20.15	20.49	1
	12	0	19.42	19.25	19.78	2
	12	6	19.46	19.24	19.75	2
	12	13	19.47	19.27	19.69	2
	25	0	19.49	19.32	19.77	2

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 45 of 84	

Table 9-34
LTE Band 2 (PCS) Reduced Conducted Powers - 3 MHz Bandwidth

LTE Band 2 (PCS) 3 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Designed MPR [dB]
			18615 (1851.5 MHz)	18900 (1880.0 MHz)	19185 (1908.5 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	21.75	21.60	22.12	0
	1	7	21.77	21.64	22.14	0
	1	14	21.75	21.62	22.15	0
	8	0	20.47	20.29	20.75	1
	8	4	20.48	20.27	20.78	1
	8	7	20.47	20.31	20.75	1
	15	0	20.48	20.33	20.72	1
16QAM	1	0	20.22	20.12	20.57	1
	1	7	20.25	20.12	20.65	1
	1	14	20.19	20.15	20.51	1
	8	0	19.44	19.41	19.70	2
	8	4	19.43	19.39	19.75	2
	8	7	19.42	19.37	19.76	2
	15	0	19.43	19.29	19.78	2

Table 9-35
LTE Band 2 (PCS) Reduced Conducted Powers -1.4 MHz Bandwidth

LTE Band 2 (PCS) 1.4 MHz Bandwidth						
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	Designed MPR [dB]
			18607 (1850.7 MHz)	18900 (1880.0 MHz)	19193 (1909.3 MHz)	
			Conducted Power [dBm]			
QPSK	1	0	21.69	21.72	22.04	0
	1	2	21.72	21.73	22.01	0
	1	5	21.72	21.75	22.03	0
	3	0	21.74	21.62	22.01	0
	3	2	21.78	21.67	22.05	0
	3	3	21.75	21.65	22.03	0
	6	0	20.44	20.34	20.75	1
16QAM	1	0	20.28	20.11	20.57	1
	1	2	20.26	20.10	20.50	1
	1	5	20.30	20.08	20.58	1
	3	0	20.27	20.08	20.50	1
	3	2	20.27	20.14	20.49	1
	3	3	20.26	20.13	20.53	1
	6	0	19.51	19.33	19.72	2

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 46 of 84

9.4 WLAN Conducted Powers

Table 9-36
2.4 GHz WLAN Maximum Average RF Power

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
2412	1	19.16	18.81	18.81
2437	6	18.56	18.11	17.97
2462	11	18.72	18.33	18.33

Table 9-37
2.4 GHz WLAN Reduced Average RF Power

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
2412	1	16.12	15.37	15.32
2437	6	16.07	16.25	16.41
2462	11	16.28	15.79	15.54

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- The bolded data rate and channel above were tested for SAR.

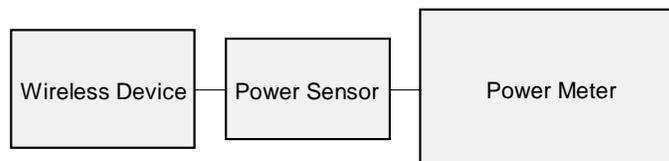


Figure 9-3
Power Measurement Setup

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 47 of 84	

10 SYSTEM VERIFICATION

10.1 Tissue Verification

**Table 10-1
Measured Head Tissue Properties**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
11/28/2018	750H	22.0	680	0.845	43.448	0.888	42.305	-4.84%	2.70%
			695	0.859	43.248	0.889	42.227	-3.37%	2.42%
			710	0.873	43.053	0.890	42.149	-1.91%	2.14%
			720	0.882	42.916	0.891	42.097	-1.01%	1.95%
			725	0.851	41.631	0.891	42.071	-4.49%	-1.05%
			740	0.865	41.410	0.893	41.994	-3.14%	-1.39%
			755	0.878	41.197	0.894	41.916	-1.79%	-1.72%
			770	0.892	40.999	0.895	41.838	-0.34%	-2.01%
			785	0.906	40.812	0.896	41.760	1.12%	-2.27%
			800	0.920	40.620	0.897	41.682	2.56%	-2.55%
12/3/2018	750H	19.0	700	0.856	42.481	0.889	42.201	-3.71%	0.66%
			710	0.858	42.471	0.890	42.149	-3.60%	0.76%
			720	0.860	42.450	0.891	42.097	-3.48%	0.84%
			725	0.862	42.440	0.891	42.071	-3.25%	0.88%
			740	0.866	42.398	0.893	41.994	-3.02%	0.96%
			755	0.871	42.352	0.894	41.916	-2.57%	1.04%
11/28/2018	850H	19.2	820	0.878	41.166	0.899	41.578	-2.34%	-0.99%
			835	0.893	40.949	0.900	41.500	-0.78%	-1.33%
			850	0.907	40.748	0.916	41.500	-0.98%	-1.81%
11/30/2018	850H	18.4	820	0.866	39.970	0.899	41.578	-3.67%	-3.87%
			835	0.880	39.749	0.900	41.500	-2.22%	-4.22%
			850	0.894	39.531	0.916	41.500	-2.40%	-4.74%
11/23/2018	1750H	19.1	1710	1.324	39.839	1.348	40.142	-1.78%	-0.75%
			1750	1.346	39.792	1.371	40.079	-1.82%	-0.72%
			1790	1.370	39.724	1.394	40.016	-1.72%	-0.73%
1/2/2019	1750H	20.0	1710	1.337	41.757	1.348	40.142	-0.82%	4.02%
			1750	1.362	41.692	1.371	40.079	-0.66%	4.02%
			1790	1.386	41.622	1.394	40.016	-0.57%	4.01%
11/23/2018	1900H	20.7	1850	1.401	39.178	1.400	40.000	0.07%	-2.06%
			1880	1.433	39.040	1.400	40.000	2.36%	-2.40%
			1910	1.466	38.897	1.400	40.000	4.71%	-2.76%
1/2/2019	1900H	20.0	1850	1.427	41.522	1.400	40.000	1.93%	3.81%
			1880	1.446	41.475	1.400	40.000	3.29%	3.69%
			1910	1.464	41.425	1.400	40.000	4.57%	3.56%
12/5/2018	2450H	18.5	2400	1.822	39.401	1.756	39.289	3.76%	0.29%
			2450	1.861	39.328	1.800	39.200	3.39%	0.33%
			2500	1.902	39.221	1.855	39.136	2.53%	0.22%
12/10/2018	2450H	18.4	2400	1.806	38.836	1.756	39.289	2.85%	-1.15%
			2450	1.848	38.744	1.800	39.200	2.67%	-1.16%
			2500	1.887	38.669	1.855	39.136	1.73%	-1.19%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 48 of 84

**Table 10-2
Measured Body Tissue Properties**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
11/29/2018	750B	19.9	680	0.922	55.020	0.958	55.804	-3.76%	-1.40%
			695	0.927	54.995	0.959	55.745	-3.34%	-1.35%
			700	0.928	54.992	0.959	55.726	-3.23%	-1.32%
			710	0.932	54.960	0.960	55.687	-2.92%	-1.31%
			720	0.935	54.924	0.961	55.648	-2.71%	-1.30%
			725	0.937	54.908	0.961	55.629	-2.50%	-1.30%
			740	0.942	54.874	0.963	55.570	-2.18%	-1.25%
			755	0.948	54.830	0.964	55.512	-1.66%	-1.23%
			770	0.953	54.808	0.965	55.453	-1.24%	-1.16%
			785	0.958	54.818	0.966	55.395	-0.83%	-1.04%
12/3/2018	750B	19.5	800	0.963	54.809	0.967	55.336	-0.41%	-0.95%
			680	0.914	55.094	0.958	55.804	-4.59%	-1.27%
			695	0.919	55.071	0.959	55.745	-4.17%	-1.21%
			710	0.925	55.058	0.960	55.687	-3.65%	-1.13%
			720	0.928	55.052	0.961	55.648	-3.43%	-1.07%
			725	0.930	55.047	0.961	55.629	-3.23%	-1.05%
			740	0.935	55.026	0.963	55.570	-2.91%	-0.98%
			755	0.940	54.986	0.964	55.512	-2.49%	-0.95%
			770	0.946	54.925	0.965	55.453	-1.97%	-0.95%
			785	0.953	54.872	0.966	55.395	-1.35%	-0.94%
11/27/2018	850B	20.0	820	0.980	53.824	0.969	55.258	1.14%	-2.60%
			835	0.995	53.655	0.970	55.200	2.58%	-2.80%
			850	1.010	53.483	0.988	55.154	2.23%	-3.03%
11/29/2018	850B	19.4	820	0.985	53.556	0.969	55.258	1.65%	-3.08%
			835	1.000	53.377	0.970	55.200	3.09%	-3.30%
			850	1.016	53.219	0.988	55.154	2.83%	-3.51%
12/5/2018	850B	20.5	820	0.956	52.777	0.969	55.258	-1.34%	-4.49%
			835	0.963	52.703	0.970	55.200	-0.72%	-4.52%
			850	0.970	52.658	0.988	55.154	-1.82%	-4.53%
11/26/2018	1750B	20.7	1710	1.513	51.837	1.463	53.537	3.42%	-3.18%
			1750	1.552	51.718	1.488	53.432	4.30%	-3.21%
			1790	1.588	51.598	1.514	53.326	4.89%	-3.24%
1/2/2019	1750B	19.6	1710	1.448	53.124	1.463	53.537	-1.03%	-0.77%
			1750	1.477	53.051	1.488	53.432	-0.74%	-0.71%
			1790	1.504	53.012	1.514	53.326	-0.66%	-0.59%
1/14/2019	1750B	21.4	1710	1.452	52.738	1.463	53.537	-0.75%	-1.49%
			1750	1.480	52.702	1.488	53.432	-0.54%	-1.37%
			1790	1.508	52.645	1.514	53.326	-0.40%	-1.28%
11/26/2018	1900B	19.2	1850	1.548	52.745	1.520	53.300	1.84%	-1.04%
			1880	1.573	52.714	1.520	53.300	3.49%	-1.10%
			1910	1.595	52.655	1.520	53.300	4.93%	-1.21%
11/28/2018	1900B	20.0	1850	1.552	52.643	1.520	53.300	2.11%	-1.23%
			1880	1.572	52.599	1.520	53.300	3.42%	-1.32%
			1910	1.595	52.560	1.520	53.300	4.93%	-1.39%
1/14/2019	1900B	21.4	1850	1.551	52.537	1.520	53.300	2.04%	-1.43%
			1880	1.573	52.490	1.520	53.300	3.49%	-1.52%
			1910	1.592	52.450	1.520	53.300	4.74%	-1.59%
12/5/2018	2450B	20.5	2400	1.964	50.592	1.902	52.767	3.26%	-4.12%
			2450	2.011	50.514	1.950	52.700	3.13%	-4.15%
			2500	2.059	50.417	2.021	52.636	1.88%	-4.22%
12/10/2018	2450B	23.3	2400	1.973	50.566	1.902	52.767	3.73%	-4.17%
			2450	2.017	50.493	1.950	52.700	3.44%	-4.19%
			2500	2.059	50.409	2.021	52.636	1.88%	-4.23%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.


FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 49 of 84

10.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.

**Table 10-3
System Verification Results**

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR _{1g} (W/kg)	1 W Target SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation _{1g} (%)
AM8	750	HEAD	11/28/2018	21.0	22.0	0.200	1057	7491	1.670	8.310	8.350	0.48%
AM8	750	HEAD	12/03/2018	20.1	18.5	0.200	1097	7491	1.590	8.220	7.950	-3.28%
AM2	850	HEAD	11/28/2018	20.4	19.2	0.200	1009	7416	2.020	10.000	10.100	1.00%
AM2	850	HEAD	11/30/2018	19.1	18.4	0.200	1009	7416	1.990	10.000	9.950	-0.50%
AM1	1750	HEAD	11/23/2018	19.6	19.3	0.100	1104	3275	3.590	36.400	35.900	-1.37%
AM1	1750	HEAD	01/02/2019	20.4	20.0	0.100	1104	3275	3.500	36.400	35.000	-3.85%
AM6	1900	HEAD	11/23/2018	21.4	19.6	0.100	5d180	3131	3.800	39.200	38.000	-3.06%
AM1	1900	HEAD	01/02/2019	20.1	20.0	0.100	5d181	3275	3.760	39.500	37.600	-4.81%
AM1	2450	HEAD	12/05/2018	21.9	18.9	0.100	750	3275	5.660	53.300	56.600	6.19%
AM2	2450	HEAD	12/10/2018	22.0	20.4	0.100	750	7416	5.360	53.300	53.600	0.56%
AM7	750	BODY	11/29/2018	20.5	20.1	0.200	1057	3329	1.760	8.790	8.800	0.11%
AM7	750	BODY	12/03/2018	19.4	18.5	0.200	1057	3329	1.760	8.790	8.800	0.11%
AM6	850	BODY	11/27/2018	22.6	20.1	0.200	1009	3131	2.130	9.880	10.650	7.79%
AM6	850	BODY	11/29/2018	22.7	20.5	0.200	1009	3131	2.140	9.880	10.700	8.30%
AM7	850	BODY	12/05/2018	20.1	19.0	0.200	1010	3329	1.970	10.200	9.850	-3.43%
AM6	1750	BODY	11/26/2018	21.1	20.1	0.100	1083	3131	4.010	37.300	40.100	7.51%
AM1	1750	BODY	01/02/2019	19.6	18.7	0.100	1104	3275	3.720	36.600	37.200	1.64%
AM7	1750	BODY	01/14/2019	22.0	20.6	0.100	1092	3329	3.610	36.400	36.100	-0.82%
AM7	1900	BODY	11/26/2018	20.7	19.2	0.100	5d180	3329	4.220	39.500	42.200	6.84%
AM7	1900	BODY	11/28/2018	22.6	21.3	0.100	5d181	3329	4.020	39.500	40.200	1.77%
AM7	1900	BODY	01/14/2019	23.0	21.0	0.100	5d181	3329	3.810	39.500	38.100	-3.54%
AM7	2450	BODY	12/05/2018	20.5	19.0	0.100	750	3329	5.380	51.200	53.800	5.08%
AM7	2450	BODY	12/10/2018	25.0	23.2	0.100	945	3329	5.170	49.400	51.700	4.66%

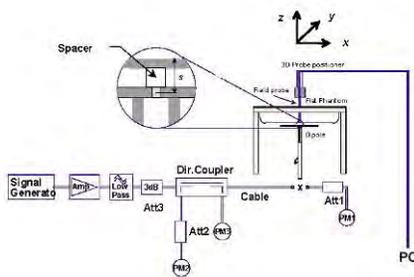

**Figure 10-1
System Verification Setup Diagram**



**Figure 10-2
System Verification Setup Photo**

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 50 of 84

11 SAR DATA SUMMARY

11.1 Standalone Head SAR Data

**Table 11-1
GSM 850 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	34.0	33.02	0.13	Right	Cheek	01133	1:8.3	0.410	1.253	0.514	
836.60	190	GSM 850	GSM	34.0	33.02	-0.05	Right	Tilt	01133	1:8.3	0.211	1.253	0.264	
824.20	128	GSM 850	GSM	34.0	32.83	-0.04	Left	Cheek	01133	1:8.3	0.371	1.309	0.486	
836.60	190	GSM 850	GSM	34.0	33.02	-0.19	Left	Cheek	01133	1:8.3	0.485	1.253	0.608	A1
848.80	251	GSM 850	GSM	34.0	32.96	-0.07	Left	Cheek	01133	1:8.3	0.477	1.271	0.606	
836.60	190	GSM 850	GSM	34.0	33.02	0.03	Left	Tilt	01133	1:8.3	0.239	1.253	0.299	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-2
GSM 1900 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	661	GSM 1900	GSM	32.0	30.39	-0.01	Right	Cheek	01851	1:8.3	0.181	1.449	0.262	
1880.00	661	GSM 1900	GSM	32.0	30.39	0.10	Right	Tilt	01851	1:8.3	0.103	1.449	0.149	
1880.00	661	GSM 1900	GSM	32.0	30.39	0.10	Left	Cheek	01851	1:8.3	0.358	1.449	0.519	A2
1880.00	661	GSM 1900	GSM	32.0	30.39	0.16	Left	Tilt	01851	1:8.3	0.092	1.449	0.133	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 51 of 84

**Table 11-3
UMTS 850 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	23.7	22.69	0.07	Right	Cheek	01133	1:1	0.324	1.262	0.409	
836.60	4183	UMTS 850	RMC	23.7	22.69	-0.02	Right	Tilt	01133	1:1	0.161	1.262	0.203	
836.60	4183	UMTS 850	RMC	23.7	22.69	0.02	Left	Cheek	01133	1:1	0.368	1.262	0.464	A3
836.60	4183	UMTS 850	RMC	23.7	22.69	0.06	Left	Tilt	01133	1:1	0.188	1.262	0.237	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (W/kg) averaged over 1 gram							

**Table 11-4
UMTS 1750 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1732.40	1412	UMTS 1750	RMC	24.7	24.14	-0.04	Right	Cheek	01869	1:1	0.350	1.138	0.398	
1732.40	1412	UMTS 1750	RMC	24.7	24.14	0.01	Right	Tilt	01869	1:1	0.124	1.138	0.141	
1732.40	1412	UMTS 1750	RMC	24.7	24.14	0.01	Left	Cheek	01869	1:1	0.442	1.138	0.503	A4
1732.40	1412	UMTS 1750	RMC	24.7	24.14	-0.13	Left	Tilt	01869	1:1	0.092	1.138	0.105	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-5
UMTS 1900 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	9400	UMTS 1900	RMC	24.5	23.92	-0.04	Right	Cheek	01869	1:1	0.353	1.143	0.403	
1880.00	9400	UMTS 1900	RMC	24.5	23.92	0.02	Right	Tilt	01869	1:1	0.186	1.143	0.213	
1852.40	9262	UMTS 1900	RMC	24.5	24.22	-0.02	Left	Cheek	01869	1:1	0.720	1.067	0.768	
1880.00	9400	UMTS 1900	RMC	24.5	23.92	0.03	Left	Cheek	01869	1:1	0.690	1.143	0.789	
1907.60	9538	UMTS 1900	RMC	24.5	24.23	-0.02	Left	Cheek	01869	1:1	0.753	1.064	0.801	A5
1880.00	9400	UMTS 1900	RMC	24.5	23.92	0.11	Left	Tilt	01869	1:1	0.161	1.143	0.184	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 52 of 84

**Table 11-6
LTE Band 71 Head SAR**

FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
680.50	133297	Mid	LTE Band 71	20	25.2	24.32	0.06	0	Right	Cheek	QPSK	1	0	01851	1:1	0.225	1.225	0.276	
680.50	133297	Mid	LTE Band 71	20	23.2	21.95	0.03	2	Right	Cheek	QPSK	50	0	01851	1:1	0.137	1.334	0.183	
680.50	133297	Mid	LTE Band 71	20	25.2	24.32	0.04	0	Right	Tilt	QPSK	1	0	01851	1:1	0.120	1.225	0.147	
680.50	133297	Mid	LTE Band 71	20	23.2	21.95	0.16	2	Right	Tilt	QPSK	50	0	01851	1:1	0.073	1.334	0.097	
680.50	133297	Mid	LTE Band 71	20	25.2	24.32	-0.13	0	Left	Cheek	QPSK	1	0	01851	1:1	0.293	1.225	0.359	A6
680.50	133297	Mid	LTE Band 71	20	23.2	21.95	0.00	2	Left	Cheek	QPSK	50	0	01851	1:1	0.170	1.334	0.227	
680.50	133297	Mid	LTE Band 71	20	25.2	24.32	0.12	0	Left	Tilt	QPSK	1	0	01851	1:1	0.145	1.225	0.178	
680.50	133297	Mid	LTE Band 71	20	23.2	21.95	0.07	2	Left	Tilt	QPSK	50	0	01851	1:1	0.094	1.334	0.125	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-7
LTE Band 12 Head SAR**

FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	25.2	24.35	0.02	0	Right	Cheek	QPSK	1	25	01299	1:1	0.264	1.216	0.321	
707.50	23095	Mid	LTE Band 12	10	23.2	21.41	0.01	2	Right	Cheek	QPSK	25	12	01299	1:1	0.138	1.510	0.208	
707.50	23095	Mid	LTE Band 12	10	25.2	24.35	-0.03	0	Right	Tilt	QPSK	1	25	01299	1:1	0.173	1.216	0.210	
707.50	23095	Mid	LTE Band 12	10	23.2	21.41	0.16	2	Right	Tilt	QPSK	25	12	01299	1:1	0.097	1.510	0.146	
707.50	23095	Mid	LTE Band 12	10	25.2	24.35	0.15	0	Left	Cheek	QPSK	1	25	01299	1:1	0.321	1.216	0.390	A7
707.50	23095	Mid	LTE Band 12	10	23.2	21.41	-0.08	2	Left	Cheek	QPSK	25	12	01299	1:1	0.173	1.510	0.261	
707.50	23095	Mid	LTE Band 12	10	25.2	24.35	0.11	0	Left	Tilt	QPSK	1	25	01299	1:1	0.209	1.216	0.254	
707.50	23095	Mid	LTE Band 12	10	23.2	21.41	-0.15	2	Left	Tilt	QPSK	25	12	01299	1:1	0.115	1.510	0.174	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-8
LTE Band 13 Head SAR**

FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
782.00	23230	Mid	LTE Band 13	10	23.5	22.70	-0.16	0	Right	Cheek	QPSK	1	49	01133	1:1	0.193	1.202	0.232	
782.00	23230	Mid	LTE Band 13	10	22.5	21.52	-0.09	1	Right	Cheek	QPSK	25	25	01133	1:1	0.158	1.253	0.198	
782.00	23230	Mid	LTE Band 13	10	23.5	22.70	0.05	0	Right	Tilt	QPSK	1	49	01133	1:1	0.129	1.202	0.155	
782.00	23230	Mid	LTE Band 13	10	22.5	21.52	0.07	1	Right	Tilt	QPSK	25	25	01133	1:1	0.109	1.253	0.137	
782.00	23230	Mid	LTE Band 13	10	23.5	22.70	0.03	0	Left	Cheek	QPSK	1	49	01133	1:1	0.220	1.202	0.264	A8
782.00	23230	Mid	LTE Band 13	10	22.5	21.52	0.02	1	Left	Cheek	QPSK	25	25	01133	1:1	0.185	1.253	0.232	
782.00	23230	Mid	LTE Band 13	10	23.5	22.70	0.02	0	Left	Tilt	QPSK	1	49	01133	1:1	0.171	1.202	0.206	
782.00	23230	Mid	LTE Band 13	10	22.5	21.52	-0.02	1	Left	Tilt	QPSK	25	25	01133	1:1	0.143	1.253	0.179	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 53 of 84	

**Table 11-9
LTE Band 5 (Cell) Head SAR**

FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.2	24.27	-0.04	0	Right	Cheek	QPSK	1	25	01133	1:1	0.459	1.239	0.569	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.2	22.33	-0.03	2	Right	Cheek	QPSK	25	25	01133	1:1	0.284	1.222	0.347	
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.2	24.27	-0.04	0	Right	Tilt	QPSK	1	25	01133	1:1	0.228	1.239	0.282	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.2	22.33	0.10	2	Right	Tilt	QPSK	25	25	01133	1:1	0.124	1.222	0.152	
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.2	24.27	0.03	0	Left	Cheek	QPSK	1	25	01133	1:1	0.533	1.239	0.660	A9
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.2	22.33	0.05	2	Left	Cheek	QPSK	25	25	01133	1:1	0.310	1.222	0.379	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.2	22.31	0.07	2	Left	Cheek	QPSK	50	0	01133	1:1	0.315	1.227	0.387	
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.2	24.27	0.17	0	Left	Tilt	QPSK	1	25	01133	1:1	0.277	1.239	0.343	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.2	22.33	0.00	2	Left	Tilt	QPSK	25	25	01133	1:1	0.156	1.222	0.191	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-10
LTE Band 66 (AWS) Head SAR**

FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1770.00	132572	High	LTE Band 66 (AWS)	20	25.2	24.63	0.00	0	Right	Cheek	QPSK	1	50	01299	1:1	0.311	1.140	0.355	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.2	22.34	0.03	2	Right	Cheek	QPSK	50	0	01299	1:1	0.184	1.219	0.224	
1770.00	132572	High	LTE Band 66 (AWS)	20	25.2	24.63	0.07	0	Right	Tilt	QPSK	1	50	01299	1:1	0.154	1.140	0.176	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.2	22.34	-0.03	2	Right	Tilt	QPSK	50	0	01299	1:1	0.098	1.219	0.119	
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.2	24.49	0.16	0	Left	Cheek	QPSK	1	99	01299	1:1	0.537	1.178	0.633	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	25.2	24.56	0.11	0	Left	Cheek	QPSK	1	99	01299	1:1	0.569	1.159	0.659	
1770.00	132572	High	LTE Band 66 (AWS)	20	25.2	24.63	0.10	0	Left	Cheek	QPSK	1	50	01299	1:1	0.606	1.140	0.691	A10
1770.00	132572	High	LTE Band 66 (AWS)	20	23.2	22.34	0.03	2	Left	Cheek	QPSK	50	0	01299	1:1	0.335	1.219	0.408	
1770.00	132572	High	LTE Band 66 (AWS)	20	25.2	24.63	0.05	0	Left	Tilt	QPSK	1	50	01299	1:1	0.129	1.140	0.147	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.2	22.34	0.14	2	Left	Tilt	QPSK	50	0	01299	1:1	0.078	1.219	0.095	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 54 of 84	

**Table 11-11
LTE Band 2 (PCS) Head SAR**

FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1900.00	19100	High	LTE Band 2 (PCS)	20	24.8	24.00	0.02	0	Right	Cheek	QPSK	1	50	01133	1:1	0.401	1.202	0.482	
1900.00	19100	High	LTE Band 2 (PCS)	20	23.8	22.64	0.06	1	Right	Cheek	QPSK	50	25	01133	1:1	0.304	1.306	0.397	
1900.00	19100	High	LTE Band 2 (PCS)	20	24.8	24.00	0.04	0	Right	Tilt	QPSK	1	50	01133	1:1	0.220	1.202	0.264	
1900.00	19100	High	LTE Band 2 (PCS)	20	23.8	22.64	0.05	1	Right	Tilt	QPSK	50	25	01133	1:1	0.174	1.306	0.227	
1860.00	18700	Low	LTE Band 2 (PCS)	20	24.8	23.81	0.02	0	Left	Cheek	QPSK	1	99	01133	1:1	0.667	1.256	0.838	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	24.8	23.78	0.09	0	Left	Cheek	QPSK	1	50	01133	1:1	0.661	1.265	0.836	
1900.00	19100	High	LTE Band 2 (PCS)	20	24.8	24.00	0.15	0	Left	Cheek	QPSK	1	50	01133	1:1	0.699	1.202	0.840	A11
1900.00	19100	High	LTE Band 2 (PCS)	20	23.8	22.64	0.03	1	Left	Cheek	QPSK	50	25	01133	1:1	0.556	1.306	0.726	
1900.00	19100	High	LTE Band 2 (PCS)	20	23.8	22.63	0.06	1	Left	Cheek	QPSK	100	0	01133	1:1	0.548	1.309	0.717	
1900.00	19100	High	LTE Band 2 (PCS)	20	24.8	24.00	0.17	0	Left	Tilt	QPSK	1	50	01133	1:1	0.167	1.202	0.201	
1900.00	19100	High	LTE Band 2 (PCS)	20	23.8	22.64	0.04	1	Left	Tilt	QPSK	50	25	01133	1:1	0.134	1.306	0.175	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-12
DTS Head SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												(W/kg)	(W/kg)			(W/kg)	
2462	11	802.11b	DSSS	22	16.5	16.28	0.05	Right	Cheek	01299	1	99.7	0.627	0.624	1.052	1.003	0.658	
2462	11	802.11b	DSSS	22	16.5	16.28	-0.20	Right	Tilt	01299	1	99.7	0.574	-	1.052	1.003	-	
2412	1	802.11b	DSSS	22	16.5	16.12	-0.03	Left	Cheek	01299	1	99.7	0.978	0.968	1.091	1.003	1.059	
2437	6	802.11b	DSSS	22	16.5	16.07	0.06	Left	Cheek	01299	1	99.7	1.124	1.000	1.104	1.003	1.107	A12
2462	11	802.11b	DSSS	22	16.5	16.28	0.20	Left	Cheek	01299	1	99.7	1.135	0.866	1.052	1.003	0.914	
2462	11	802.11b	DSSS	22	16.5	16.28	0.05	Left	Tilt	01299	1	99.7	0.918	0.695	1.052	1.003	0.733	
2437	6	802.11b	DSSS	22	16.5	16.07	0.03	Left	Cheek	01299	1	99.7	1.665	0.928	1.104	1.003	1.028	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram								

Note: Blue entries represent variability measurements.

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M181190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 55 of 84	

11.2 Standalone Body-Worn SAR Data

**Table 11-13
GSM/UMTS/ Body-Worn SAR Data**

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	34.0	33.02	0.18	15 mm	01851	1:8.3	back	0.367	1.253	0.460	A13
1880.00	661	GSM 1900	GSM	32.0	30.39	-0.07	15 mm	01229	1:8.3	back	0.262	1.449	0.380	A15
836.60	4183	UMTS 850	RMC	23.7	22.69	0.06	15 mm	01851	1:1	back	0.277	1.262	0.350	A17
1732.40	1412	UMTS 1750	RMC	24.7	24.14	-0.01	15 mm	01869	1:1	back	0.445	1.138	0.506	A19
1880.00	9400	UMTS 1900	RMC	24.5	23.92	0.13	15 mm	01869	1:1	back	0.461	1.143	0.527	A21
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-14
LTE Body-Worn SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
680.50	133297	Mid	LTE Band 71	20	25.2	24.32	-0.03	0	01851	QPSK	1	0	15 mm	back	1:1	0.350	1.225	0.429	A23
680.50	133297	Mid	LTE Band 71	20	23.2	21.95	0.02	2	01851	QPSK	50	0	15 mm	back	1:1	0.212	1.334	0.283	
707.50	23095	Mid	LTE Band 12	10	25.2	24.35	0.13	0	01229	QPSK	1	25	15 mm	back	1:1	0.386	1.216	0.469	A25
707.50	23095	Mid	LTE Band 12	10	23.2	21.41	-0.02	2	01229	QPSK	25	12	15 mm	back	1:1	0.197	1.510	0.297	
782.00	23230	Mid	LTE Band 13	10	23.5	22.70	-0.11	0	01229	QPSK	1	49	15 mm	back	1:1	0.260	1.202	0.313	A27
782.00	23230	Mid	LTE Band 13	10	22.5	21.52	-0.01	1	01229	QPSK	25	25	15 mm	back	1:1	0.215	1.253	0.269	
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.2	24.27	-0.13	0	01133	QPSK	1	25	15 mm	back	1:1	0.422	1.239	0.523	A29
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.2	22.33	0.02	2	01133	QPSK	25	25	15 mm	back	1:1	0.281	1.222	0.343	
1770.00	132572	High	LTE Band 66 (AWS)	20	25.2	24.63	-0.07	0	01851	QPSK	1	50	15 mm	back	1:1	0.427	1.140	0.487	A31
1770.00	132572	High	LTE Band 66 (AWS)	20	23.2	22.34	0.04	2	01851	QPSK	50	0	15 mm	back	1:1	0.278	1.219	0.339	
1900.00	19100	High	LTE Band 2 (PCS)	20	24.8	24.00	0.00	0	01133	QPSK	1	50	15 mm	back	1:1	0.482	1.202	0.579	A33
1900.00	19100	High	LTE Band 2 (PCS)	20	23.8	22.64	0.02	1	01133	QPSK	50	25	15 mm	back	1:1	0.370	1.306	0.483	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram												

**Table 11-15
DTS Body-Worn SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												(W/kg)	(W/kg)		(W/kg)		
2412	1	802.11b	DSSS	22	21.0	19.16	0.20	15 mm	01133	1	back	99.7	0.196	0.181	1.528	1.003	0.277	A35
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 56 of 84	

11.3 Standalone Hotspot SAR Data

**Table 11-16
GPRS Hotspot SAR Data**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
824.20	128	GSM 850	GPRS	29.0	28.27	0.04	10 mm	01851	4	1:2.076	back	0.756	1.183	0.894	
836.60	190	GSM 850	GPRS	29.0	28.35	0.06	10 mm	01851	4	1:2.076	back	0.882	1.161	1.024	A14
848.80	251	GSM 850	GPRS	29.0	28.23	-0.15	10 mm	01851	4	1:2.076	back	0.870	1.194	1.039	
836.60	190	GSM 850	GPRS	29.0	28.35	-0.08	10 mm	01851	4	1:2.076	front	0.687	1.161	0.798	
836.60	190	GSM 850	GPRS	29.0	28.35	-0.17	10 mm	01851	4	1:2.076	bottom	0.215	1.161	0.250	
836.60	190	GSM 850	GPRS	29.0	28.35	-0.05	10 mm	01851	4	1:2.076	right	0.272	1.161	0.316	
836.60	190	GSM 850	GPRS	29.0	28.35	-0.07	10 mm	01851	4	1:2.076	left	0.231	1.161	0.268	
836.60	190	GSM 850	GPRS	29.0	28.35	0.04	10 mm	01851	4	1:2.076	back	0.813	1.161	0.944	
1880.00	661	GSM 1900	GPRS	26.5	24.69	0.03	10 mm	01229	4	1:2.076	back	0.430	1.517	0.652	
1850.20	512	GSM 1900	GPRS	26.5	24.63	0.13	10 mm	01229	4	1:2.076	front	0.519	1.538	0.798	A16
1880.00	661	GSM 1900	GPRS	26.5	24.69	-0.06	10 mm	01229	4	1:2.076	front	0.492	1.517	0.746	
1909.80	810	GSM 1900	GPRS	26.5	24.64	0.10	10 mm	01229	4	1:2.076	front	0.519	1.535	0.797	
1880.00	661	GSM 1900	GPRS	26.5	24.69	0.04	10 mm	01229	4	1:2.076	bottom	0.456	1.517	0.692	
1880.00	661	GSM 1900	GPRS	26.5	24.69	-0.03	10 mm	01229	4	1:2.076	right	0.053	1.517	0.080	
1880.00	661	GSM 1900	GPRS	26.5	24.69	0.05	10 mm	01229	4	1:2.076	left	0.280	1.517	0.425	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

Note: Blue entries represent variability measurements.

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 57 of 84	

Table 11-17
UMTS Hotspot SAR Data

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	23.7	22.69	-0.02	10 mm	01851	N/A	1:1	back	0.422	1.262	0.533	A18
836.60	4183	UMTS 850	RMC	23.7	22.69	0.01	10 mm	01851	N/A	1:1	front	0.327	1.262	0.413	
836.60	4183	UMTS 850	RMC	23.7	22.69	0.01	10 mm	01851	N/A	1:1	bottom	0.184	1.262	0.232	
836.60	4183	UMTS 850	RMC	23.7	22.69	0.12	10 mm	01851	N/A	1:1	right	0.216	1.262	0.273	
836.60	4183	UMTS 850	RMC	23.7	22.69	-0.02	10 mm	01851	N/A	1:1	left	0.195	1.262	0.246	
1712.40	1312	UMTS 1750	RMC	24.7	24.27	-0.07	10 mm	01869	N/A	1:1	back	1.110	1.104	1.225	A20
1732.40	1412	UMTS 1750	RMC	24.7	24.14	-0.07	10 mm	01869	N/A	1:1	back	0.956	1.138	1.088	
1752.60	1513	UMTS 1750	RMC	24.7	24.37	0.00	10 mm	01869	N/A	1:1	back	0.924	1.079	0.997	
1712.40	1312	UMTS 1750	RMC	24.7	24.27	-0.01	10 mm	01869	N/A	1:1	front	0.902	1.104	0.996	
1732.40	1412	UMTS 1750	RMC	24.7	24.14	-0.05	10 mm	01869	N/A	1:1	front	0.810	1.138	0.922	
1752.60	1513	UMTS 1750	RMC	24.7	24.37	-0.03	10 mm	01869	N/A	1:1	front	0.843	1.079	0.910	
1732.40	1412	UMTS 1750	RMC	24.7	24.14	0.00	10 mm	01869	N/A	1:1	bottom	0.639	1.138	0.727	
1732.40	1412	UMTS 1750	RMC	24.7	24.14	-0.11	10 mm	01869	N/A	1:1	right	0.115	1.138	0.131	
1732.40	1412	UMTS 1750	RMC	24.7	24.14	0.02	10 mm	01869	N/A	1:1	left	0.507	1.138	0.577	
1880.00	9400	UMTS 1900	RMC	22.5	21.19	0.03	10 mm	01299	N/A	1:1	back	0.461	1.352	0.623	
1852.40	9262	UMTS 1900	RMC	22.5	21.39	0.05	10 mm	01299	N/A	1:1	front	0.499	1.291	0.644	
1880.00	9400	UMTS 1900	RMC	22.5	21.19	0.03	10 mm	01299	N/A	1:1	front	0.511	1.352	0.691	
1907.60	9538	UMTS 1900	RMC	22.5	21.51	-0.01	10 mm	01299	N/A	1:1	front	0.561	1.256	0.705	A22
1880.00	9400	UMTS 1900	RMC	22.5	21.19	-0.02	10 mm	01299	N/A	1:1	bottom	0.442	1.352	0.598	
1880.00	9400	UMTS 1900	RMC	22.5	21.19	0.01	10 mm	01299	N/A	1:1	right	0.057	1.352	0.077	
1880.00	9400	UMTS 1900	RMC	22.5	21.19	-0.06	10 mm	01299	N/A	1:1	left	0.313	1.352	0.423	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT							Body								
Spatial Peak							1.6 W/kg (mW/g)								
Uncontrolled Exposure/General Population							averaged over 1 gram								

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 58 of 84	

**Table 11-18
LTE Band 71 Hotspot SAR**

FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
680.50	133297	Mid	LTE Band 71	20	25.2	24.32	0.07	0	01851	QPSK	1	0	10 mm	back	1:1	0.503	1.225	0.616	A24
680.50	133297	Mid	LTE Band 71	20	23.2	21.95	-0.03	2	01851	QPSK	50	0	10 mm	back	1:1	0.292	1.334	0.390	
680.50	133297	Mid	LTE Band 71	20	25.2	24.32	-0.08	0	01851	QPSK	1	0	10 mm	front	1:1	0.352	1.225	0.431	
680.50	133297	Mid	LTE Band 71	20	23.2	21.95	-0.05	2	01851	QPSK	50	0	10 mm	front	1:1	0.203	1.334	0.271	
680.50	133297	Mid	LTE Band 71	20	25.2	24.32	0.03	0	01851	QPSK	1	0	10 mm	bottom	1:1	0.105	1.225	0.129	
680.50	133297	Mid	LTE Band 71	20	23.2	21.95	-0.01	2	01851	QPSK	50	0	10 mm	bottom	1:1	0.060	1.334	0.080	
680.50	133297	Mid	LTE Band 71	20	25.2	24.32	0.04	0	01851	QPSK	1	0	10 mm	right	1:1	0.138	1.225	0.169	
680.50	133297	Mid	LTE Band 71	20	23.2	21.95	0.03	2	01851	QPSK	50	0	10 mm	right	1:1	0.092	1.334	0.123	
680.50	133297	Mid	LTE Band 71	20	25.2	24.32	0.10	0	01851	QPSK	1	0	10 mm	left	1:1	0.268	1.225	0.328	
680.50	133297	Mid	LTE Band 71	20	23.2	21.95	0.02	2	01851	QPSK	50	0	10 mm	left	1:1	0.160	1.334	0.213	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-19
LTE Band 12 Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	25.2	24.35	-0.05	0	01229	QPSK	1	25	10 mm	back	1:1	0.512	1.216	0.623	A26
707.50	23095	Mid	LTE Band 12	10	23.2	21.41	-0.01	2	01229	QPSK	25	12	10 mm	back	1:1	0.257	1.510	0.388	
707.50	23095	Mid	LTE Band 12	10	25.2	24.35	-0.05	0	01229	QPSK	1	25	10 mm	front	1:1	0.385	1.216	0.468	
707.50	23095	Mid	LTE Band 12	10	23.2	21.41	-0.02	2	01229	QPSK	25	12	10 mm	front	1:1	0.196	1.510	0.296	
707.50	23095	Mid	LTE Band 12	10	25.2	24.35	-0.10	0	01229	QPSK	1	25	10 mm	bottom	1:1	0.108	1.216	0.131	
707.50	23095	Mid	LTE Band 12	10	23.2	21.41	-0.04	2	01229	QPSK	25	12	10 mm	bottom	1:1	0.054	1.510	0.082	
707.50	23095	Mid	LTE Band 12	10	25.2	24.35	-0.21	0	01229	QPSK	1	25	10 mm	right	1:1	0.209	1.216	0.254	
707.50	23095	Mid	LTE Band 12	10	23.2	21.41	-0.11	2	01229	QPSK	25	12	10 mm	right	1:1	0.103	1.510	0.156	
707.50	23095	Mid	LTE Band 12	10	25.2	24.35	-0.04	0	01229	QPSK	1	25	10 mm	left	1:1	0.341	1.216	0.415	
707.50	23095	Mid	LTE Band 12	10	23.2	21.41	0.01	2	01229	QPSK	25	12	10 mm	left	1:1	0.178	1.510	0.269	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 59 of 84	

**Table 11-20
LTE Band 13 Hotspot SAR**

FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
782.00	23230	Mid	LTE Band 13	10	23.5	22.70	0.03	0	01229	QPSK	1	49	10 mm	back	1:1	0.291	1.202	0.350	A28
782.00	23230	Mid	LTE Band 13	10	22.5	21.52	0.04	1	01229	QPSK	25	25	10 mm	back	1:1	0.230	1.253	0.288	
782.00	23230	Mid	LTE Band 13	10	23.5	22.70	0.00	0	01229	QPSK	1	49	10 mm	front	1:1	0.227	1.202	0.273	
782.00	23230	Mid	LTE Band 13	10	22.5	21.52	0.00	1	01229	QPSK	25	25	10 mm	front	1:1	0.183	1.253	0.229	
782.00	23230	Mid	LTE Band 13	10	23.5	22.70	0.09	0	01229	QPSK	1	49	10 mm	bottom	1:1	0.085	1.202	0.102	
782.00	23230	Mid	LTE Band 13	10	22.5	21.52	0.01	1	01229	QPSK	25	25	10 mm	bottom	1:1	0.067	1.253	0.084	
782.00	23230	Mid	LTE Band 13	10	23.5	22.70	0.02	0	01229	QPSK	1	49	10 mm	right	1:1	0.199	1.202	0.239	
782.00	23230	Mid	LTE Band 13	10	22.5	21.52	0.00	1	01229	QPSK	25	25	10 mm	right	1:1	0.157	1.253	0.197	
782.00	23230	Mid	LTE Band 13	10	23.5	22.70	0.21	0	01229	QPSK	1	49	10 mm	left	1:1	0.207	1.202	0.249	
782.00	23230	Mid	LTE Band 13	10	22.5	21.52	0.08	1	01229	QPSK	25	25	10 mm	left	1:1	0.165	1.253	0.207	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-21
LTE Band 5 (Cell) Hotspot SAR**

FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.2	24.27	-0.03	0	01133	QPSK	1	25	10 mm	back	1:1	0.594	1.239	0.736	A30
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.2	22.33	-0.01	2	01133	QPSK	25	25	10 mm	back	1:1	0.395	1.222	0.483	
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.2	24.27	0.01	0	01133	QPSK	1	25	10 mm	front	1:1	0.437	1.239	0.541	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.2	22.33	-0.14	2	01133	QPSK	25	25	10 mm	front	1:1	0.314	1.222	0.384	
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.2	24.27	-0.13	0	01133	QPSK	1	25	10 mm	bottom	1:1	0.278	1.239	0.344	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.2	22.33	-0.03	2	01133	QPSK	25	25	10 mm	bottom	1:1	0.154	1.222	0.188	
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.2	24.27	-0.06	0	01133	QPSK	1	25	10 mm	right	1:1	0.339	1.239	0.420	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.2	22.33	0.01	2	01133	QPSK	25	25	10 mm	right	1:1	0.222	1.222	0.271	
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.2	24.27	0.10	0	01133	QPSK	1	25	10 mm	left	1:1	0.306	1.239	0.379	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.2	22.33	0.00	2	01133	QPSK	25	25	10 mm	left	1:1	0.190	1.222	0.232	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 60 of 84	

**Table 11-22
LTE Band 66 (AWS) Hotspot SAR**

FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.2	24.49	-0.05	0	01851	QPSK	1	99	10 mm	back	1:1	1.150	1.178	1.355	A32
1745.00	132322	Mid	LTE Band 66 (AWS)	20	25.2	24.56	-0.04	0	01851	QPSK	1	99	10 mm	back	1:1	0.996	1.159	1.154	
1770.00	132572	High	LTE Band 66 (AWS)	20	25.2	24.63	0.03	0	01851	QPSK	1	50	10 mm	back	1:1	0.966	1.140	1.101	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.2	22.34	-0.03	2	01851	QPSK	50	0	10 mm	back	1:1	0.595	1.219	0.725	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.2	22.29	-0.03	2	01851	QPSK	100	0	10 mm	back	1:1	0.584	1.233	0.720	
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.2	24.49	0.04	0	01851	QPSK	1	99	10 mm	front	1:1	0.911	1.178	1.073	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	25.2	24.56	-0.19	0	01851	QPSK	1	99	10 mm	front	1:1	0.935	1.159	1.084	
1770.00	132572	High	LTE Band 66 (AWS)	20	25.2	24.63	-0.15	0	01851	QPSK	1	50	10 mm	front	1:1	0.891	1.140	1.016	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.2	22.34	0.02	2	01851	QPSK	50	0	10 mm	front	1:1	0.521	1.219	0.635	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.2	22.29	0.00	2	01851	QPSK	100	0	10 mm	front	1:1	0.528	1.233	0.651	
1770.00	132572	High	LTE Band 66 (AWS)	20	25.2	24.63	-0.06	0	01851	QPSK	1	50	10 mm	bottom	1:1	0.683	1.140	0.779	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.2	22.34	-0.01	2	01851	QPSK	50	0	10 mm	bottom	1:1	0.408	1.219	0.497	
1770.00	132572	High	LTE Band 66 (AWS)	20	25.2	24.63	0.11	0	01851	QPSK	1	50	10 mm	right	1:1	0.095	1.140	0.108	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.2	22.34	0.00	2	01851	QPSK	50	0	10 mm	right	1:1	0.061	1.219	0.074	
1770.00	132572	High	LTE Band 66 (AWS)	20	25.2	24.63	-0.01	0	01851	QPSK	1	50	10 mm	left	1:1	0.596	1.140	0.679	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.2	22.34	-0.04	2	01851	QPSK	50	0	10 mm	left	1:1	0.357	1.219	0.435	
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.2	24.49	-0.08	0	01851	QPSK	1	99	10 mm	back	1:1	1.050	1.178	1.237	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram									

Note: Blue entries represent variability measurements.

**Table 11-23
LTE Band 2 (PCS) Hotspot SAR**

FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1900.00	19100	High	LTE Band 2 (PCS)	20	22.8	21.96	-0.11	0	01133	QPSK	1	50	10 mm	back	1:1	0.506	1.213	0.614	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.8	20.67	0.01	1	01133	QPSK	50	25	10 mm	back	1:1	0.404	1.297	0.524	
1860.00	18700	Low	LTE Band 2 (PCS)	20	22.8	21.73	-0.01	0	01133	QPSK	1	99	10 mm	front	1:1	0.507	1.279	0.648	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	22.8	21.75	0.20	0	01133	QPSK	1	0	10 mm	front	1:1	0.513	1.274	0.654	
1900.00	19100	High	LTE Band 2 (PCS)	20	22.8	21.96	-0.02	0	01133	QPSK	1	50	10 mm	front	1:1	0.561	1.213	0.680	A34
1900.00	19100	High	LTE Band 2 (PCS)	20	21.8	20.67	-0.05	1	01133	QPSK	50	25	10 mm	front	1:1	0.446	1.297	0.578	
1900.00	19100	High	LTE Band 2 (PCS)	20	22.8	21.96	0.19	0	01133	QPSK	1	50	10 mm	bottom	1:1	0.427	1.213	0.518	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.8	20.67	0.07	1	01133	QPSK	50	25	10 mm	bottom	1:1	0.364	1.297	0.472	
1900.00	19100	High	LTE Band 2 (PCS)	20	22.8	21.96	0.05	0	01133	QPSK	1	50	10 mm	right	1:1	0.074	1.213	0.090	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.8	20.67	-0.09	1	01133	QPSK	50	25	10 mm	right	1:1	0.060	1.297	0.078	
1900.00	19100	High	LTE Band 2 (PCS)	20	22.8	21.96	-0.05	0	01133	QPSK	1	50	10 mm	left	1:1	0.328	1.213	0.398	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.8	20.67	-0.03	1	01133	QPSK	50	25	10 mm	left	1:1	0.253	1.297	0.328	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 61 of 84	

**Table 11-24
WLAN Hotspot SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
2412	1	802.11b	DSSS	22	21.0	19.16	0.06	10 mm	01869	1	back	99.7	0.374	0.392	1.528	1.003	0.601	
2412	1	802.11b	DSSS	22	21.0	19.16	0.11	10 mm	01869	1	front	99.7	0.283	0.214	1.528	1.003	0.328	
2412	1	802.11b	DSSS	22	21.0	19.16	0.08	10 mm	01869	1	top	99.7	0.467	0.414	1.528	1.003	0.634	A36
2412	1	802.11b	DSSS	22	21.0	19.16	-0.13	10 mm	01869	1	right	99.7	0.092	-	1.528	1.003	-	
2412	1	802.11b	DSSS	22	21.0	19.16	0.20	10 mm	01869	1	left	99.7	0.018	-	1.528	1.003	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT									Body									
Spatial Peak									1.6 W/kg (mW/g)									
Uncontrolled Exposure/General Population									averaged over 1 gram									

11.4 SAR Test Notes

General Notes:

- The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
- Batteries are fully charged at the beginning of the SAR measurements.
- Liquid tissue depth was at least 15.0 cm for all frequencies.
- The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
- SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
- Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 15 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
- Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was ≤ 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were required.
- Per FCC KDB 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than or equal to 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 13 for variability analysis.
- During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated (See Section 6.7 for more details).
- This device utilizes power reduction for some wireless modes and technologies, as outlined in Section 1.3. The maximum output power allowed for each transmitter and exposure condition was evaluated for SAR compliance based on expected use conditions and simultaneous transmission scenarios.

GSM Test Notes:

- Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
- Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.

FCC ID: A3LSMS260DL	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 62 of 84	

- Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

UMTS Notes:

- UMTS mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
- Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

LTE Notes:

- LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r04. The general test procedures used for testing can be found in Section 8.5.4.
- MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
- A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

WLAN Notes:

- For held-to-ear and hotspot operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg for 1g evaluations, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
- Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 8.6.3 for more information.
- When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg for 1g evaluations or all test channels were measured.
- The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 63 of 84	

12 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore, simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is ≤ 1.6 W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1g or 10g SAR.

(*) For test positions that were not required to be evaluated for WLAN SAR per FCC KDB Publication 248227, the worst case WLAN SAR result was used for simultaneous transmission analysis.

When standalone SAR is not required to be measured, per FCC KDB 447498 D01v06 4.3.2 b), the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Separation Distance, mm}}$$

Table 12-1
Estimated SAR

Mode	Frequency	Maximum Allowed Power	Separation Distance (Head)	Estimated SAR (Head)	Separation Distance (Body worn)	Estimated SAR (Body worn)	Separation Distance (Hotspot)	Estimated SAR (Hotspot)
	[MHz]	[dBm]	[mm]	[W/kg]	[mm]	[W/kg]	[mm]	[W/kg]
Bluetooth	2480	8.50	5	0.294	15	0.098	10	0.147

Note: Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 64 of 84

12.3 Head SAR Simultaneous Transmission Analysis

(*) For test positions that were not required to be evaluated for WLAN SAR per FCC KDB publication 248227, the worst case WLAN SAR result for the applicable exposure conditions was used for simultaneous transmission analysis.

**Table 12-2
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Held to Ear)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	GSM 850	0.608	1.107	See Table Below
	GSM 1900	0.519	1.107	See Table Below
	UMTS 850	0.464	1.107	1.571
	UMTS 1750	0.503	1.107	See Table Below
	UMTS 1900	0.801	1.107	See Table Below
	LTE Band 71	0.359	1.107	1.466
	LTE Band 12	0.390	1.107	1.497
	LTE Band 13	0.264	1.107	1.371
	LTE Band 5 (Cell)	0.660	1.107	See Table Below
	LTE Band 66 (AWS)	0.691	1.107	See Table Below
	LTE Band 2 (PCS)	0.840	1.107	See Table Below

FCC ID: A3LSMS260DL	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 65 of 84	

Simult Tx	Configuration	GSM 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2		
Head SAR	Right Cheek	0.514	0.658	1.172	N/A
	Right Tilt	0.264	1.107*	1.371	N/A
	Left Cheek	0.608	1.107	See Note 1	0.03
	Left Tilt	0.299	0.733	1.032	N/A

Simult Tx	Configuration	GSM 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2		
Head SAR	Right Cheek	0.262	0.658	0.920	N/A
	Right Tilt	0.149	1.107*	1.256	N/A
	Left Cheek	0.519	1.107	See Note 1	0.02
	Left Tilt	0.133	0.733	0.866	N/A

Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2		
Head SAR	Right Cheek	0.398	0.658	1.056	N/A
	Right Tilt	0.141	1.107*	1.248	N/A
	Left Cheek	0.503	1.107	See Note 1	0.02
	Left Tilt	0.105	0.733	0.838	N/A

Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2		
Head SAR	Right Cheek	0.403	0.658	1.061	N/A
	Right Tilt	0.213	1.107*	1.320	N/A
	Left Cheek	0.801	1.107	See Note 1	0.03
	Left Tilt	0.184	0.733	0.917	N/A

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 66 of 84	

Simult Tx	Configuration	LTE Band 5 (Cell) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2
Head SAR	Right Cheek	0.569	0.658	1.227	N/A
	Right Tilt	0.282	1.107*	1.389	N/A
	Left Cheek	0.660	1.107	See Note 1	0.03
	Left Tilt	0.343	0.733	1.076	N/A

Simult Tx	Configuration	LTE Band 66 (AWS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2
Head SAR	Right Cheek	0.355	0.658	1.013	N/A
	Right Tilt	0.176	1.107*	1.283	N/A
	Left Cheek	0.691	1.107	See Note 1	0.03
	Left Tilt	0.147	0.733	0.880	N/A

Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2
Head SAR	Right Cheek	0.482	0.658	1.140	N/A
	Right Tilt	0.264	1.107*	1.371	N/A
	Left Cheek	0.840	1.107	See Note 1	0.03
	Left Tilt	0.201	0.733	0.934	N/A

FCC ID: A3LSMS260DL	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 67 of 84

**Table 12-3
Simultaneous Transmission Scenario with Bluetooth (Held to Ear)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	GSM 850	0.608	0.294	0.902
	GSM 1900	0.519	0.294	0.813
	UMTS 850	0.464	0.294	0.758
	UMTS 1750	0.503	0.294	0.797
	UMTS 1900	0.801	0.294	1.095
	LTE Band 71	0.359	0.294	0.653
	LTE Band 12	0.390	0.294	0.684
	LTE Band 13	0.264	0.294	0.558
	LTE Band 5 (Cell)	0.660	0.294	0.954
	LTE Band 66 (AWS)	0.691	0.294	0.985
	LTE Band 2 (PCS)	0.840	0.294	1.134

Note: Bluetooth SAR was not required to be measured per FCC KDB Publication 447498 D01v06. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

Note 1: No evaluation was performed to determine the aggregate 1g SAR for these configurations as the SPLS ratio between the antenna pairs was not greater than 0.04 per FCC KDB 447498 D01v06. See Section 12.6 for detailed SPLS ratio analysis.

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 68 of 84

12.4 Body-Worn Simultaneous Transmission Analysis

Table 12-4
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	GSM 850	0.460	0.277	0.737
	GSM 1900	0.380	0.277	0.657
	UMTS 850	0.350	0.277	0.627
	UMTS 1750	0.506	0.277	0.783
	UMTS 1900	0.527	0.277	0.804
	LTE Band 71	0.429	0.277	0.706
	LTE Band 12	0.469	0.277	0.746
	LTE Band 13	0.313	0.277	0.590
	LTE Band 5 (Cell)	0.523	0.277	0.800
	LTE Band 66 (AWS)	0.487	0.277	0.764
	LTE Band 2 (PCS)	0.579	0.277	0.856

FCC ID: A3LSMS260DL	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 69 of 84	

**Table 12-5
Simultaneous Transmission Scenario with Bluetooth (Body-Worn at 1.5 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	GSM 850	0.460	0.098	0.558
	GSM 1900	0.380	0.098	0.478
	UMTS 850	0.350	0.098	0.448
	UMTS 1750	0.506	0.098	0.604
	UMTS 1900	0.527	0.098	0.625
	LTE Band 71	0.429	0.098	0.527
	LTE Band 12	0.469	0.098	0.567
	LTE Band 13	0.313	0.098	0.411
	LTE Band 5 (Cell)	0.523	0.098	0.621
	LTE Band 66 (AWS)	0.487	0.098	0.585
LTE Band 2 (PCS)	0.579	0.098	0.677	

Note: Bluetooth SAR was not required to be measured per FCC KDB Publication 447498 D01v06. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 70 of 84	

12.5 Hotspot SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v02r01, the devices edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR (“-”).

(*) For test positions that were not required to be evaluated for WLAN SAR per FCC KDB publication 248227, the worst case WLAN SAR result for the applicable exposure conditions was used for simultaneous transmission analysis.

Table 12-6
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	GPRS 850	1.039	0.634	See Table Below
	GPRS 1900	0.798	0.634	1.432
	UMTS 850	0.533	0.634	1.167
	UMTS 1750	1.225	0.634	See Table Below
	UMTS 1900	0.705	0.634	1.339
	LTE Band 71	0.616	0.634	1.250
	LTE Band 12	0.623	0.634	1.257
	LTE Band 13	0.350	0.634	0.984
	LTE Band 5 (Cell)	0.736	0.634	1.370
	LTE Band 66 (AWS)	1.355	0.634	See Table Below
	LTE Band 2 (PCS)	0.680	0.634	1.314

Simult Tx	Configuration	GPRS 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2
Hotspot SAR	Back	1.039	0.601	See Note 1	0.02
	Front	0.798	0.328	1.126	N/A
	Top	-	0.634	0.634	N/A
	Bottom	0.250	-	0.250	N/A
	Right	0.316	0.634*	0.950	N/A
	Left	0.268	0.634*	0.902	N/A

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 71 of 84

Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2		
Hotspot SAR	Back	1.225	0.601	See Note 1	0.02
	Front	0.996	0.328	1.324	N/A
	Top	-	0.634	0.634	N/A
	Bottom	0.727	-	0.727	N/A
	Right	0.131	0.634*	0.765	N/A
	Left	0.577	0.634*	1.211	N/A

Simult Tx	Configuration	LTE Band 66 (AWS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2		
Hotspot SAR	Back	1.355	0.601	See Note 1	0.02
	Front	1.084	0.328	1.412	N/A
	Top	-	0.634	0.634	N/A
	Bottom	0.779	-	0.779	N/A
	Right	0.108	0.634*	0.742	N/A
	Left	0.679	0.634*	1.313	N/A

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 72 of 84	

**Table 12-7
Simultaneous Transmission Scenario with Bluetooth (Hotspot at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	GPRS 850	1.039	0.147	1.186
	GPRS 1900	0.798	0.147	0.945
	UMTS 850	0.533	0.147	0.680
	UMTS 1750	1.225	0.147	1.372
	UMTS 1900	0.705	0.147	0.852
	LTE Band 71	0.616	0.147	0.763
	LTE Band 12	0.623	0.147	0.770
	LTE Band 13	0.350	0.147	0.497
	LTE Band 5 (Cell)	0.736	0.147	0.883
	LTE Band 66 (AWS)	1.355	0.147	1.502
LTE Band 2 (PCS)	0.680	0.147	0.827	

Note: Bluetooth SAR was not required to be measured per FCC KDB Publication 447498 D01v06. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

Note 1: No evaluation was performed to determine the aggregate 1g SAR for these configurations as the SPLS ratio between the antenna pairs was not greater than 0.04 per FCC KDB 447498 D01v06. See Section 12.6 for detailed SPLS ratio analysis.

12.6 SPLSR Evaluation and Analysis

Per FCC KDB Publication 447498 D01v06, when the sum of the standalone transmitters is more than 1.6 W/kg for 1g, the SAR sum to peak locations can be analyzed to determine SAR distribution overlaps. When the SAR peak to location ratio (shown below) for each pair of antennas is ≤ 0.04 for 1g, simultaneous SAR evaluation is not required. The distance between the transmitters was calculated using the following formula.

$$\text{Distance}_{\text{Tx1} - \text{Tx2}} = R_i = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2} \text{ (Head)}$$

$$\text{Distance}_{\text{Tx1} - \text{Tx2}} = R_i = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2} \text{ (Hotspot)}$$

$$\text{SPLS Ratio} = \frac{(SAR_1 + SAR_2)^{1.5}}{R_i}$$

FCC ID: A3LSMS260DL	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 73 of 84

12.6.1 Left Cheek SPLSR Evaluation and Analysis

Table 12-8
Peak SAR Locations for Left Cheek


Mode/Band	x (mm)	y (mm)	z (mm)
2.4 GHz WLAN	-5.07	319.42	-172.88
GSM 850	38.43	264.31	-174.35
GSM 1900	48.57	246.88	-169.95
UMTS 1750	52.92	239.16	-167.76
UMTS 1900	47.09	259.51	-172.51
LTE Band 5	38.42	264.32	-174.29
LTE Band 66	44.17	244.03	-170.95
LTE Band 2 (PCS)	48.57	246.87	-169.97

Table 12-9
Left Cheek SAR to Peak Location Separation Ratio Calculations

Antenna Pair		Standalone SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLSR Ratio	Plot Number
Ant "a"	Ant "b"	a	b	a+b	D _{a-b}	$(a+b)^{1.5}/D_{a-b}$	
2.4 GHz WLAN	GSM 850	1.107	0.608	1.715	70.22	0.03	1
2.4 GHz WLAN	GSM 1900	1.107	0.519	1.626	90.27	0.02	2
2.4 GHz WLAN	UMTS 1750	1.107	0.503	1.610	99.15	0.02	3
2.4 GHz WLAN	UMTS 1900	1.107	0.801	1.908	79.44	0.03	4
2.4 GHz WLAN	LTE Band 5	1.107	0.66	1.767	70.21	0.03	5
2.4 GHz WLAN	LTE Band 66	1.107	0.691	1.798	90.07	0.03	6
2.4 GHz WLAN	LTE Band 2 (PCS)	1.107	0.84	1.947	90.27	0.03	7

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M181190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 74 of 84	

Table 12-10
Left Cheek SAR to Peak Location Separation Ratio Plots

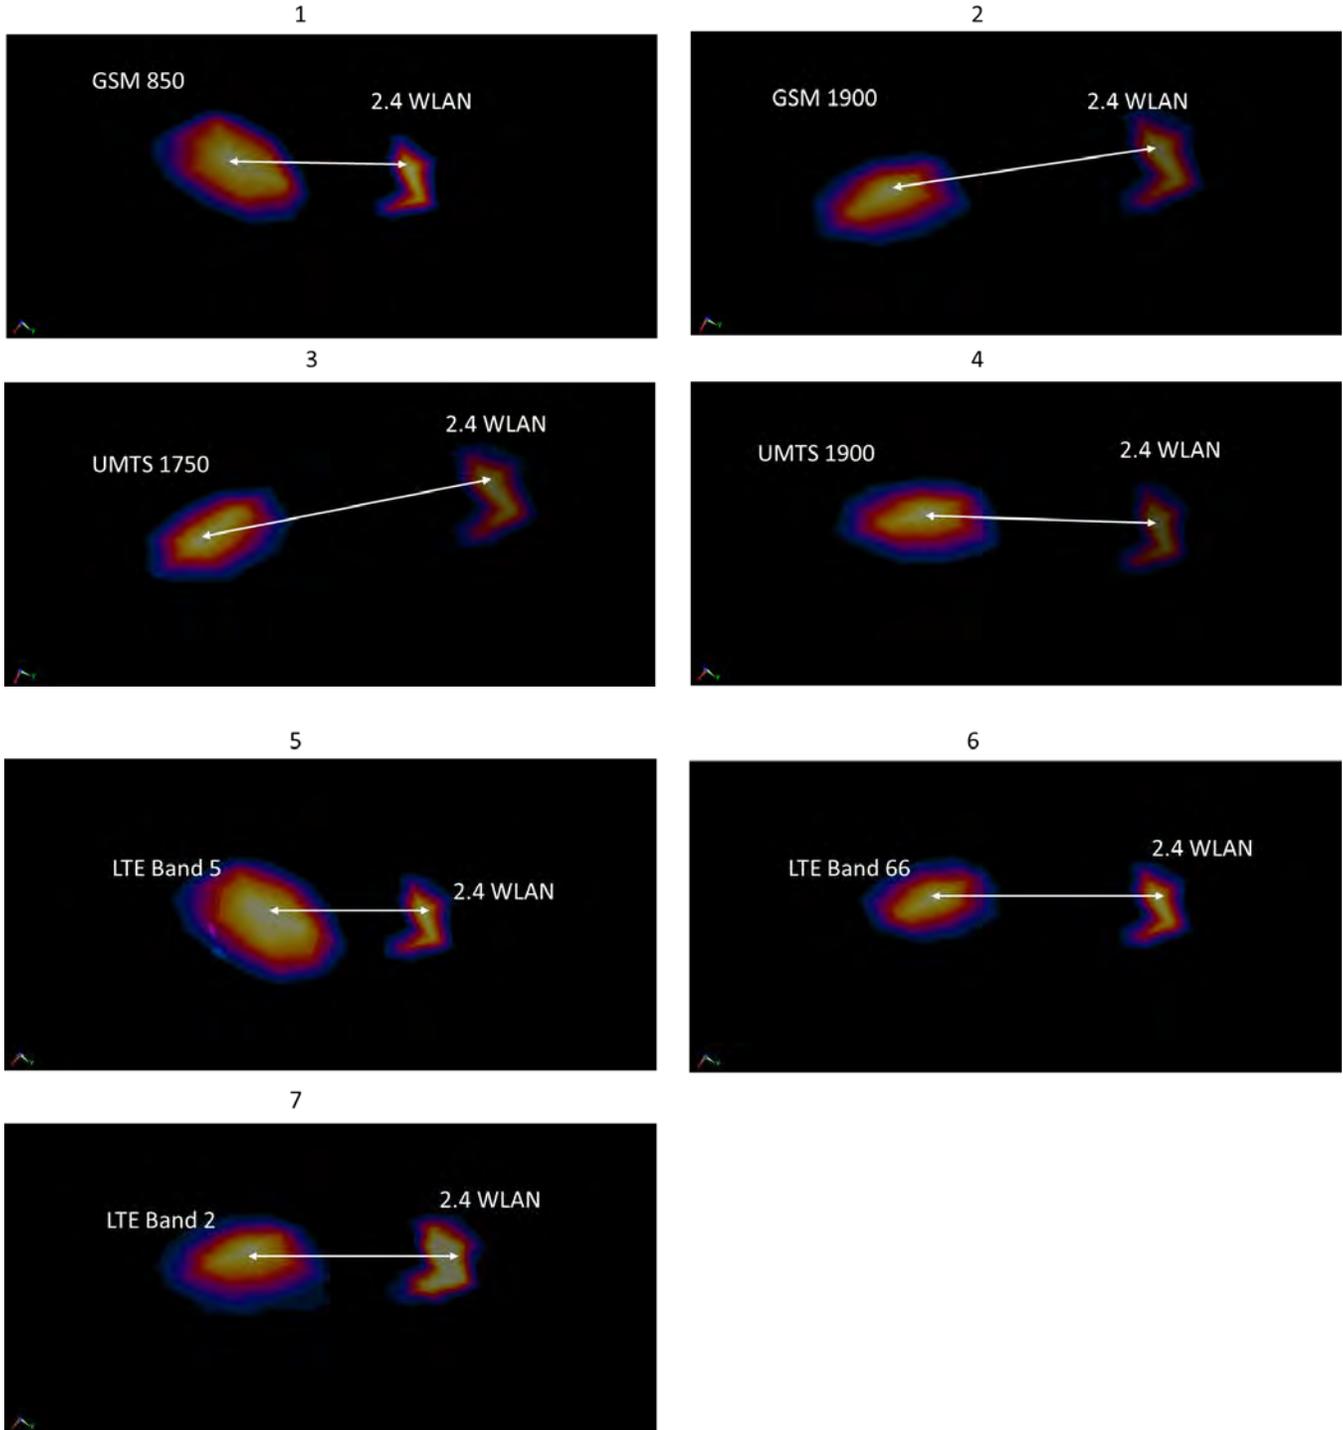

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 75 of 84

12.6.2

Back Side SPLSR Evaluation and Analysis


Table 12-11
Peak SAR Locations for Body Back Side

Mode/Band	x (mm)	y (mm)
2.4 GHz WLAN	-29.01	60.01
GPRS 850	-10.00	-60.00
UMTS 1750	5.00	-60.00
LTE Band 66	13.00	-60.00

Table 12-12
Back Side SAR to Peak Location Separation Ratio Calculations

Antenna Pair		Standalone SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio	Plot Number
Ant "a"	Ant "b"	a	b	a+b	D _{a-b}	$(a+b)^{1.5}/D_{a-b}$	
2.4 GHz WLAN	GPRS 850	0.601	1.039	1.640	121.51	0.02	8
2.4 GHz WLAN	UMTS 1750	0.601	1.225	1.826	124.74	0.02	9
2.4 GHz WLAN	LTE Band 66	0.601	1.355	1.956	127.15	0.02	10

Table 12-13
Back Side SAR to Peak Location Separation Ratio Plots

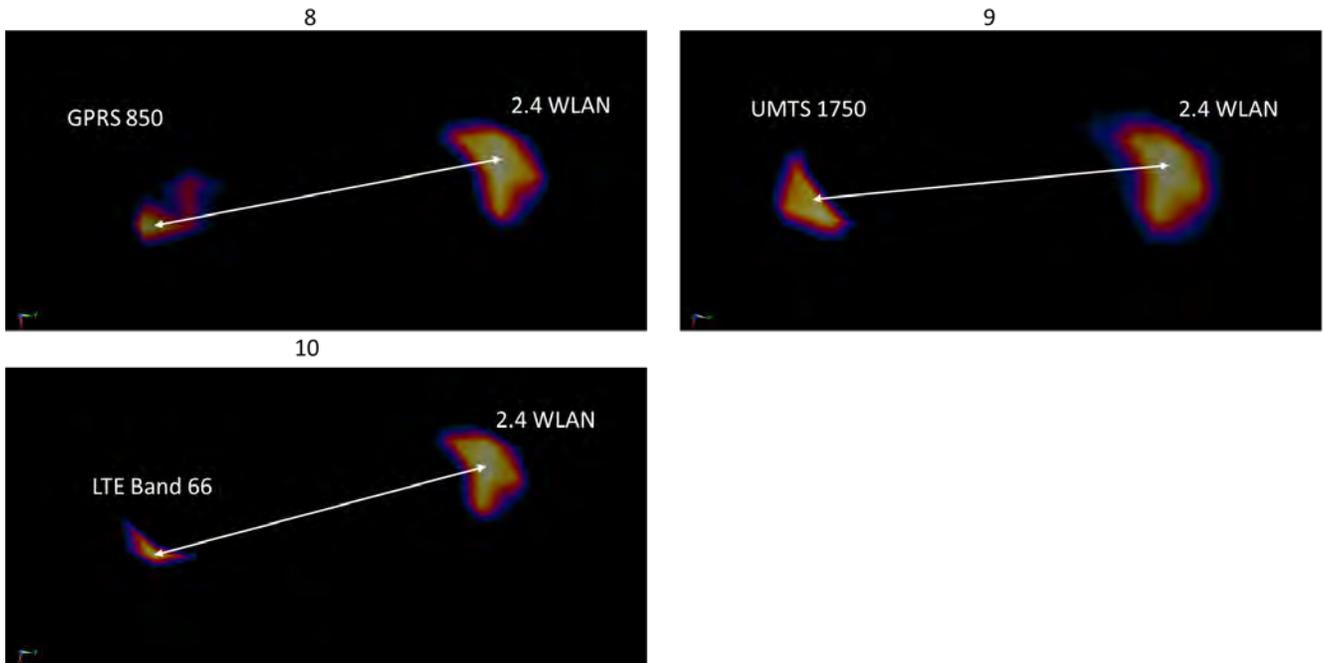

FCC ID: A3LSMS260DL	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 SAMSUNG	Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 76 of 84	

12.7 Simultaneous Transmission Conclusion

The above numerical summed SAR and SPLSR analysis are sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528-2013 Section 6.3.4.1.2.

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 77 of 84	

13 SAR MEASUREMENT VARIABILITY

13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

**Table 13-1
Head SAR Measurement Variability Results**

HEAD VARIABILITY RESULTS														
Band	FREQUENCY		Mode/Band	Service	Side	Test Position	Data Rate (Mbps)	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.						(W/kg)	(W/kg)		(W/kg)		(W/kg)	
2450	2437.00	6	802.11b, 22 MHz Bandwidth	DSSS	Left	Cheek	1	1.000	0.928	1.08	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							averaged over 1 gram 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 13-2
Body SAR Measurement Variability Results**

BODY VARIABILITY RESULTS														
Band	FREQUENCY		Mode	Service	# of Time Slots	Side	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.						(W/kg)	(W/kg)		(W/kg)		(W/kg)	
835	836.80	190	GSM 850	GPRS	4	back	10 mm	0.882	0.813	1.08	N/A	N/A	N/A	N/A
1750	1720.00	132072	LTE Band 66 (AWS), 20 MHz Bandwidth	QPSK, 1 RB, 99 RB Offset	N/A	back	10 mm	1.150	1.050	1.10	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 78 of 84	

13.2 Measurement Uncertainty

The measured SAR was <1.5 W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 79 of 84

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8594A	(9kHz-2.9GHz) Spectrum Analyzer	N/A	N/A	N/A	3051A00187
Agilent	8753ES	S-Parameter Network Analyzer	7/30/2018	Annual	7/30/2019	MY40000670
Agilent	8753ES	S-Parameter Vector Network Analyzer	8/30/2018	Annual	8/30/2019	MY40003841
Agilent	E4438C	ESG Vector Signal Generator	3/23/2017	Biennial	3/23/2019	MY42082659
Agilent	E4438C	ESG Vector Signal Generator	4/18/2018	Annual	4/18/2019	MY45091346
Agilent	E5515C	Wireless Communications Test Set	5/22/2018	Biennial	5/22/2020	GB43193563
Agilent	E5515C	Wireless Communications Test Set	1/24/2018	Annual	1/24/2019	GB44400860
Agilent	N4010A	Wireless Connectivity Test Set	N/A	N/A	N/A	GB46170464
Agilent	N4010A	Wireless Connectivity Test Set	N/A	N/A	N/A	GB44450273
Agilent	N5182A	MXG Vector Signal Generator	4/18/2018	Annual	4/18/2019	MY47420800
Agilent	N5182A	MXG Vector Signal Generator	1/24/2018	Annual	1/24/2019	MY47420651
Agilent	N5182A-506	MXG Vector Signal Generator	6/19/2018	Annual	6/19/2019	MY48180366
Agilent	N9030A	PXA Signal Analyzer (44GHz)	5/25/2018	Annual	5/25/2019	MY52350166
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433972
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433974
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433976
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433978
Anritsu	MA24106A	USB Power Sensor	6/5/2018	Annual	6/5/2019	1231538
Anritsu	MA24106A	USB Power Sensor	6/5/2018	Annual	6/5/2019	1231535
Anritsu	MA24106A	USB Power Sensor	6/21/2018	Annual	6/21/2019	1244524
Anritsu	MA24106A	USB Power Sensor	6/5/2018	Annual	6/5/2019	1244515
Anritsu	MA2411B	Pulse Power Sensor	3/2/2018	Annual	3/2/2019	1339018
Anritsu	ML2495A	Power Meter	10/21/2018	Annual	10/21/2019	941001
Anritsu	MT8820C	Radio Communication Analyzer	3/20/2018	Annual	3/20/2019	620114419
Anritsu	MT8821C	Radio Communication Analyzer	7/26/2018	Annual	7/26/2019	620114418
Anritsu	MT8821C	Radio Communication Analyzer	7/24/2018	Annual	7/24/2019	6201664756
COMTECH	AR85729-5	Solid State Amplifier	CBT	N/A	CBT	M155A00-009
COMTECH	AR85729-5/5759B	Solid State Amplifier	CBT	N/A	CBT	M3W1A00-1002
Control Company	4040	Therm./Clock/Humidity Monitor	3/31/2017	Biennial	3/31/2019	170232394
Control Company	4352	Ultra Long Stem Thermometer	5/2/2017	Biennial	5/2/2019	170330144
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/4/2018	Annual	6/4/2019	MY53401181
Keysight Technologies	U3401A	Digital Multimeter	5/17/2018	Annual	5/17/2019	MY57201470
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
Mini Circuits	PWR-4GHS	USB Power Sensor	1/20/2018	Annual	1/20/2019	11710030063
Mini Circuits	PWR-SEN-4GHS	USB Power Sensor	3/30/2018	Annual	3/30/2019	11401010036
MiniCircuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	R897950903
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Mitutoyo	CD-6'CSX	Digital Caliper	4/18/2018	Biennial	4/18/2020	13264165
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	BW-S3W2	Attenuator (3dB)	CBT	N/A	CBT	120
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	NC-100	Torque Wrench	4/18/2018	Annual	4/18/2019	N/A
Pasternack	NC-100	Torque Wrench	5/23/2018	Biennial	5/23/2020	N/A
Rohde & Schwarz	CMU200	Base Station Simulator	5/18/2018	Annual	5/18/2019	109892
Rohde & Schwarz	CMW500	Radio Communication Tester	6/8/2018	Annual	6/8/2019	112347
Rohde & Schwarz	CMW500	Radio Communication Tester	8/10/2018	Annual	8/10/2019	116743
Rohde & Schwarz	CMW500	Radio Communication Tester	4/5/2018	Annual	4/5/2019	128633
Rohde & Schwarz	CMW500	Radio Communication Tester	6/9/2018	Annual	6/9/2019	108843
Rohde & Schwarz	CMW500	Radio Communication tester	8/3/2018	Annual	8/3/2019	140144
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	1/19/2018	Annual	1/19/2019	164948
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	5/29/2018	Annual	5/29/2019	161662
Seekonk	NC-100	Torque Wrench (8" lb)	5/10/2018	Biennial	5/10/2020	21053
Seekonk	NC-100	Torque Wrench (8" lb)	5/23/2018	Biennial	5/23/2020	N/A
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/15/2018	Annual	5/15/2019	1070
SPEAG	D750V3	750 MHz SAR Dipole	6/13/2017	Biennial	6/13/2019	1057
SPEAG	D750V3	750 MHz SAR Dipole	9/8/2017	Biennial	9/8/2019	1097
SPEAG	D850V2	850 MHz SAR Dipole	8/16/2017	Biennial	8/16/2019	1009
SPEAG	D850V2	850 MHz SAR Dipole	9/8/2017	Biennial	9/8/2019	1010
SPEAG	D1750V2	1750 MHz SAR Dipole	9/7/2017	Biennial	9/7/2019	1104
SPEAG	D1750V2	1750 MHz SAR Dipole	5/15/2018	Annual	5/15/2019	1092
SPEAG	D1900V2	1900 MHz SAR Dipole	8/16/2017	Biennial	8/16/2019	50180
SPEAG	D2450V2	2450 MHz SAR Dipole	6/7/2017	Biennial	6/7/2019	750
SPEAG	D1750V2	1750 MHz SAR Dipole	6/9/2017	Biennial	6/9/2019	1083
SPEAG	D1900V2	1900 MHz SAR Dipole	9/7/2017	Biennial	9/7/2019	50181
SPEAG	D2450V2	2450 MHz SAR Dipole	5/16/2018	Annual	5/16/2019	945
SPEAG	EX3DV4	SAR Probe	7/20/2018	Annual	7/20/2019	7491
SPEAG	EX3DV4	SAR Probe	7/20/2018	Annual	7/20/2019	7416
SPEAG	ES3DV3	SAR Probe	4/12/2018	Annual	4/12/2019	3275
SPEAG	ES3DV3	SAR Probe	3/13/2018	Annual	3/13/2019	3131
SPEAG	ES3DV3	SAR Probe	2/13/2018	Annual	2/13/2019	3329
SPEAG	DAE4	Dasy Data Acquisition Electronics	10/18/2018	Annual	10/18/2019	1364
SPEAG	DAE4	Dasy Data Acquisition Electronics	7/10/2018	Annual	7/10/2019	1402
SPEAG	DAE4	Dasy Data Acquisition Electronics	4/12/2018	Annual	4/12/2019	501
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/7/2018	Annual	3/7/2019	604
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/8/2018	Annual	2/8/2019	1403

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 80 of 84

15 MEASUREMENT UNCERTAINTIES

a	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System								
Probe Calibration	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	2.0	R	1.73	1.0	1.0	1.2	1.2	∞
Linearity	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	0.25	R	1.73	1.0	1.0	0.1	0.1	∞
Readout Electronics	0.3	N	1	1.0	1.0	0.3	0.3	∞
Response Time	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions - Noise	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
RF Ambient Conditions - Reflections	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	6.7	R	1.73	1.0	1.0	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Test Sample Related								
Test Sample Positioning	2.7	N	1	1.0	1.0	2.7	2.7	35
Device Holder Uncertainty	1.67	N	1	1.0	1.0	1.7	1.7	5
Output Power Variation - SAR drift measurement	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
SAR Scaling	0.0	R	1.73	1.0	1.0	0.0	0.0	∞
Phantom & Tissue Parameters								
Phantom Uncertainty (Shape & Thickness tolerances)	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	4.2	N	1	0.78	0.71	3.3	3.0	10
Liquid Permittivity - measurement uncertainty	4.1	N	1	0.23	0.26	1.0	1.1	10
Liquid Conductivity - Temperature Uncertainty	3.4	R	1.73	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	0.6	R	1.73	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)	RSS					11.5	11.3	60
Expanded Uncertainty (95% CONFIDENCE LEVEL)	k=2					23.0	22.6	

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 81 of 84	

16 CONCLUSION

16.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: A3LSMS260DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset		Page 82 of 84

17 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID: A3LSMS260DL	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 83 of 84	

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: A3LSMS260DL	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1811190204-01-R1.A3L	Test Dates: 11/23/18 – 1/14/2019	DUT Type: Portable Handset	Page 84 of 84

APPENDIX A: SAR TEST DATA

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01133

Communication System: UID 0, GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium: 850 Head Medium parameters used (interpolated):
 $f = 836.6$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 39.726$; $\rho = 1000$ kg/m³
Phantom section: Left Section

Test Date: 11-30-2018; Ambient Temp: 19.1°C; Tissue Temp: 18.4°C

Probe: EX3DV4 - SN7416; ConvF(9.45, 9.45, 9.45); Calibrated: 7/20/2018;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1402; Calibrated: 7/10/2018
Phantom: Twin-SAM V4.0; Type: QD 000 P40 CA; Serial: 1275
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: GSM 850, Left Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.63 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.638 W/kg

SAR(1 g) = 0.485 W/kg

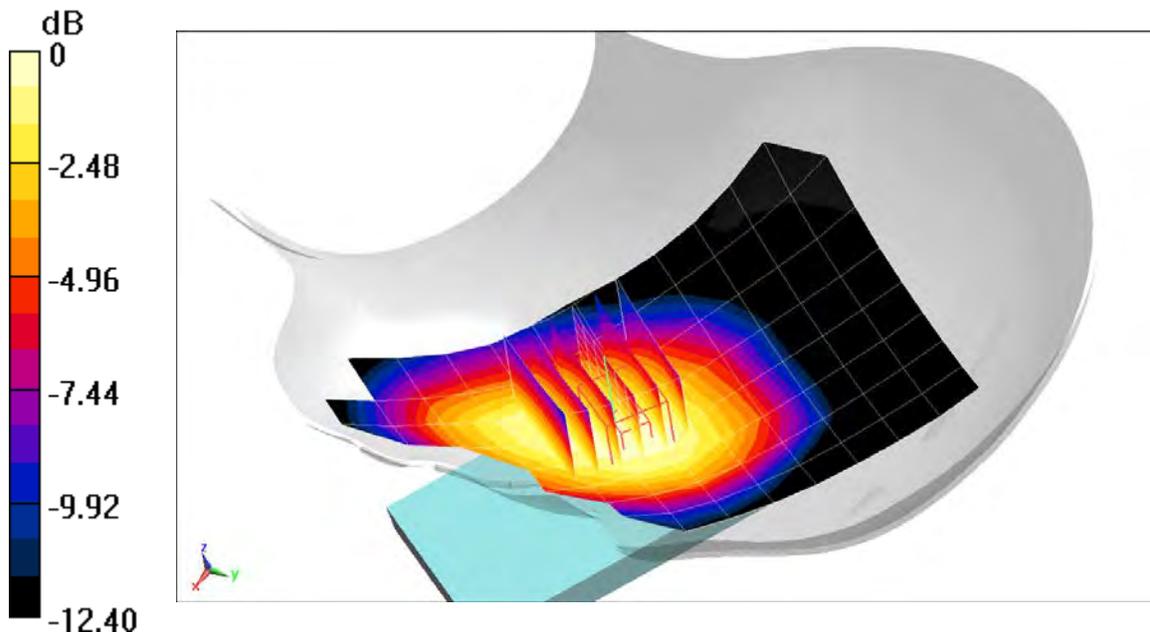

0 dB = 0.583 W/kg = -2.34 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01851


Communication System: UID 0, GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: 1900 Head Medium parameters used:
 $f = 1880 \text{ MHz}$; $\sigma = 1.433 \text{ S/m}$; $\epsilon_r = 39.04$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 11-23-2018; Ambient Temp: 21.4°C; Tissue Temp: 19.6°C

Probe: ES3DV3 - SN3131; ConvF(5.27, 5.27, 5.27); Calibrated: 3/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn604; Calibrated: 3/7/2018
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: GSM 1900, Left Head, Cheek, Mid.ch

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.56 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 0.561 W/kg
SAR(1 g) = 0.358 W/kg

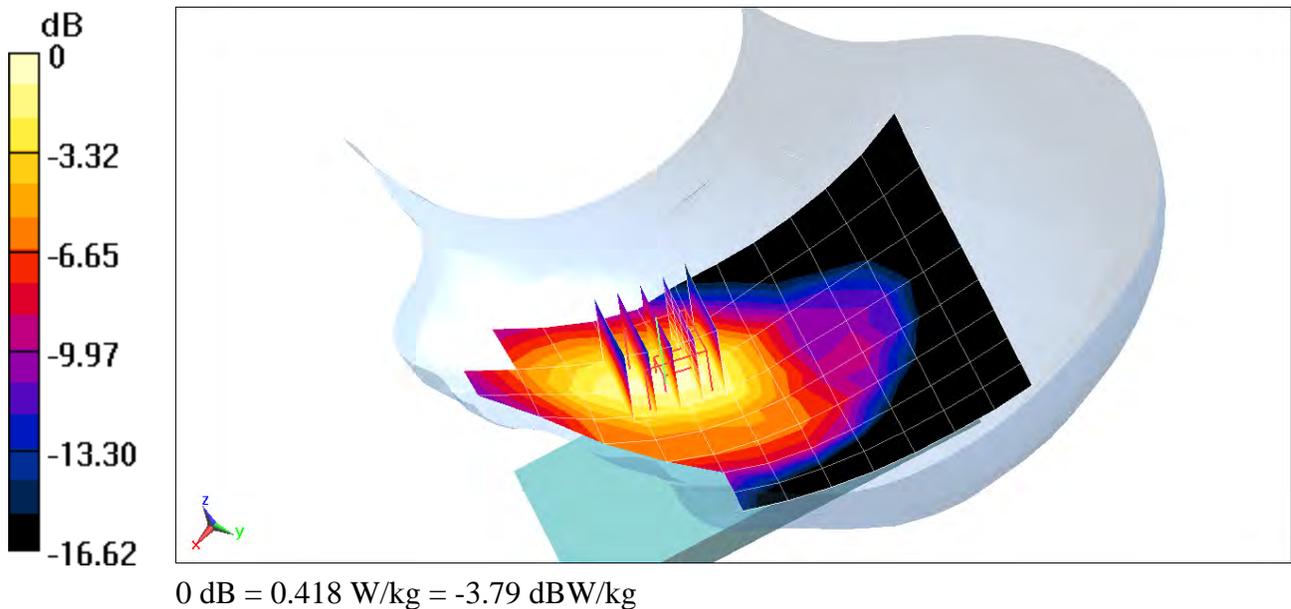

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01133

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: 850 Head Medium parameters used (interpolated):
 $f = 836.6$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 39.726$; $\rho = 1000$ kg/m³
Phantom section: Left Section

Test Date: 11-30-2018; Ambient Temp: 19.1°C; Tissue Temp: 18.4°C

Probe: EX3DV4 - SN7416; ConvF(9.45, 9.45, 9.45); Calibrated: 7/20/2018;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1402; Calibrated: 7/10/2018
Phantom: Twin-SAM V4.0; Type: QD 000 P40 CA; Serial: 1275
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: UMTS 850, Left Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.78 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.487 W/kg

SAR(1 g) = 0.368 W/kg

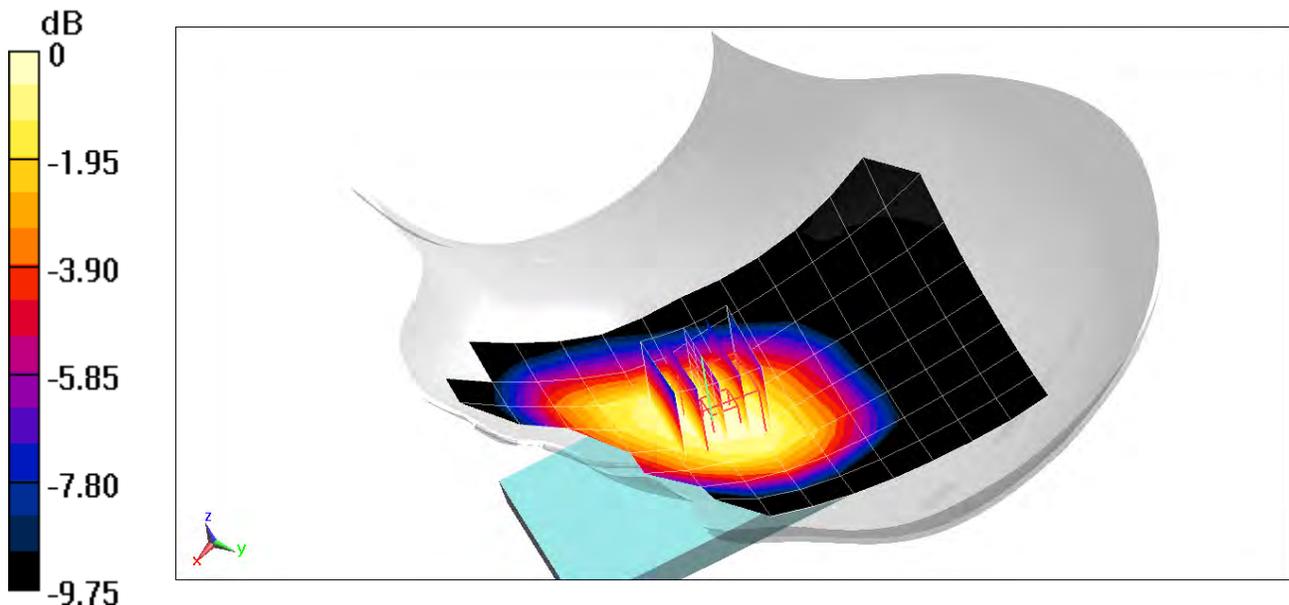

0 dB = 0.443 W/kg = -3.54 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01869

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1
Medium: 1750 Head Medium parameters used (interpolated):
 $f = 1732.4 \text{ MHz}$; $\sigma = 1.351 \text{ S/m}$; $\epsilon_r = 41.721$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 1-2-2019; Ambient Temp: 20.4°C; Tissue Temp: 20.0°C

Probe: ES3DV3 - SN3275; ConvF(5.52, 5.52, 5.52); Calibrated: 4/12/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn501; Calibrated: 4/12/2018
Phantom: Twin-SAM V4.0; Type: QD 000 P40 CD; Serial: 1736
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: UMTS 1750, Left Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.86 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.650 W/kg

SAR(1 g) = 0.442 W/kg

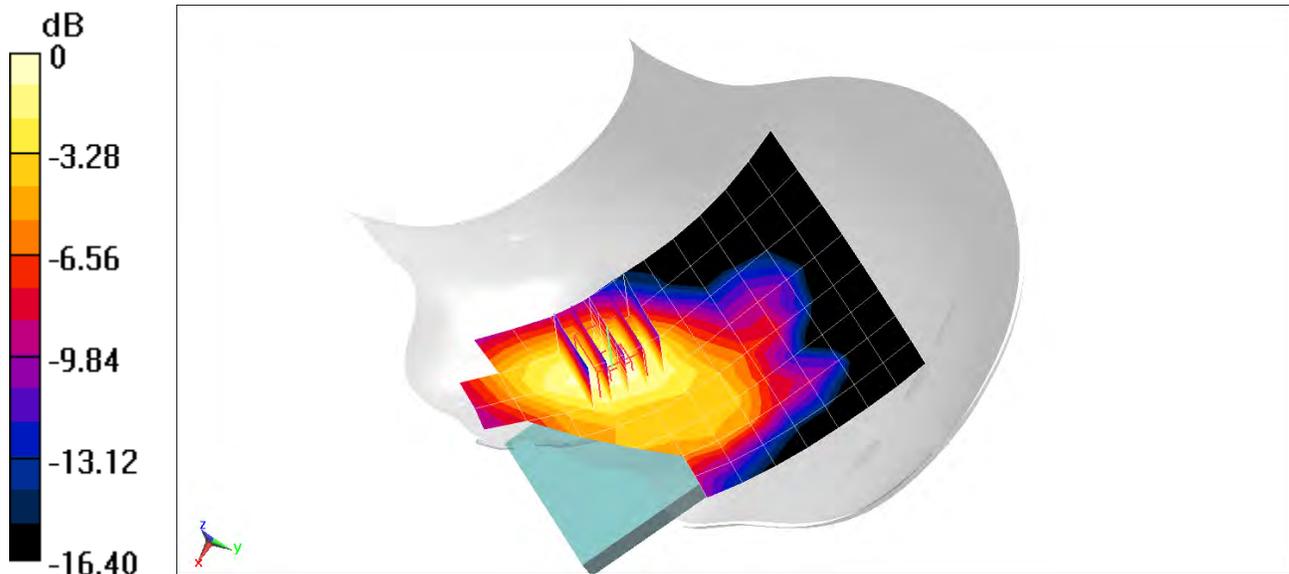

0 dB = 0.514 W/kg = -2.89 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01869


Communication System: UID 0, UMTS; Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium: 1900 Head Medium parameters used (interpolated):
 $f = 1907.6 \text{ MHz}$; $\sigma = 1.463 \text{ S/m}$; $\epsilon_r = 41.429$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 01-02-2019; Ambient Temp: 20.1°C; Tissue Temp: 20.0°C

Probe: ES3DV3 - SN3275; ConvF(5.33, 5.33, 5.33); Calibrated: 4/12/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn501; Calibrated: 4/12/2018
Phantom: Twin-SAM V4.0; Type: QD 000 P40 CD; Serial: 1736
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: UMTS 1900, Left Head, Cheek, High.ch

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 23.49 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 1.14 W/kg
SAR(1 g) = 0.753 W/kg

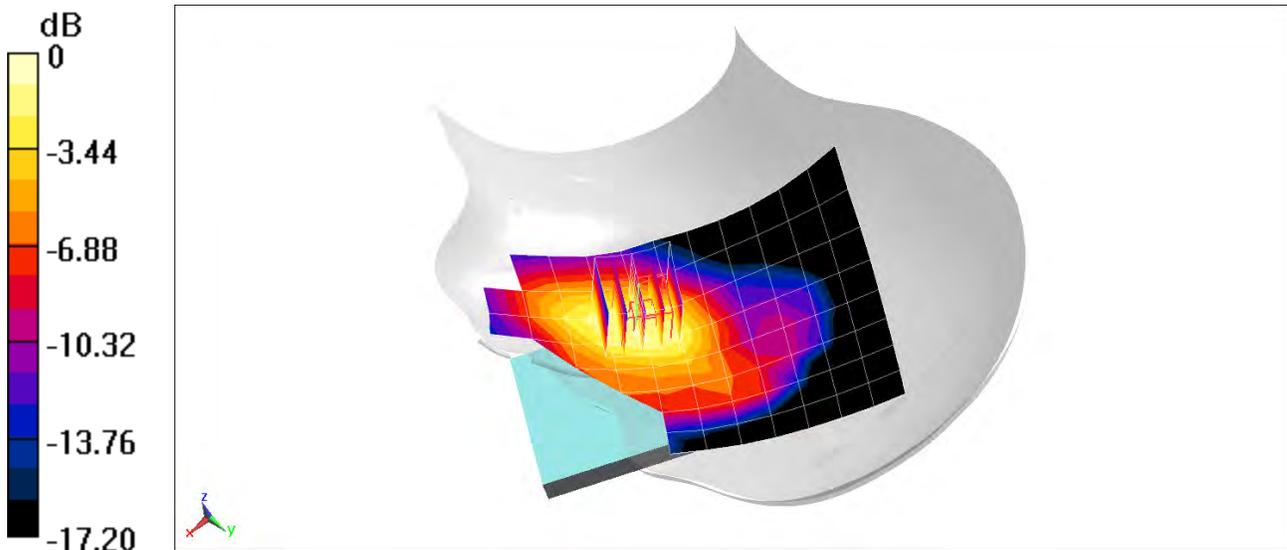

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01851


Communication System: UID 0, LTE Band 71; Frequency: 680.5 MHz; Duty Cycle: 1:1
Medium: 750 Head Medium parameters used (interpolated):
 $f = 680.5$ MHz; $\sigma = 0.845$ S/m; $\epsilon_r = 43.441$; $\rho = 1000$ kg/m³
Phantom section: Left Section

Test Date: 11-28-2018; Ambient Temp: 21.0°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7491; ConvF(10.48, 10.48, 10.48); Calibrated: 7/20/2018;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1364; Calibrated: 10/18/2018
Phantom: Twin-SAM V8.0_Left; Type: QD 000 P41 AA; Serial: 1935
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 71, Left Head, Cheek, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 19.85 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 0.375 W/kg
SAR(1 g) = 0.293 W/kg

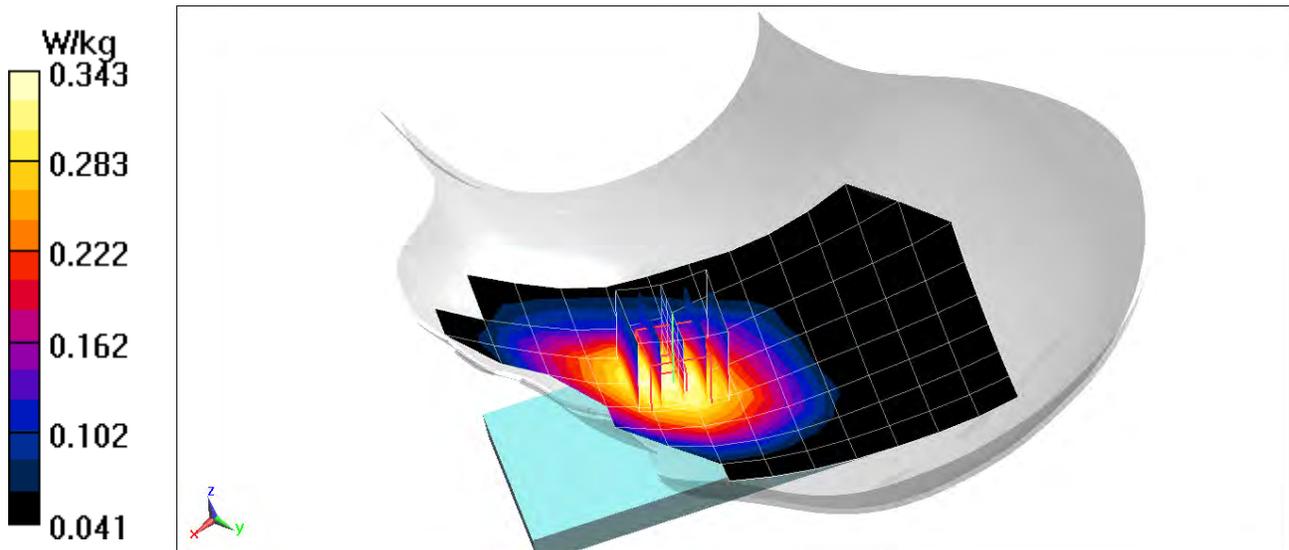

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01299


Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: 750 Head Medium parameters used (interpolated):
 $f = 707.5 \text{ MHz}$; $\sigma = 0.858 \text{ S/m}$; $\epsilon_r = 42.473$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 12-03-2018; Ambient Temp: 20.1°C; Tissue Temp: 18.5°C

Probe: EX3DV4 - SN7491; ConvF(10.48, 10.48, 10.48); Calibrated: 7/20/2018;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1364; Calibrated: 10/18/2018
Phantom: Twin-SAM V8.0_Left; Type: QD 000 P41 AA; Serial: 1935
Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 12, Left Head, Cheek, Mid.ch, QPSK,
10 MHz Bandwidth, 1 RB, 25 RB Offset**

Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 20.32 V/m; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 0.397 W/kg
SAR(1 g) = 0.321 W/kg

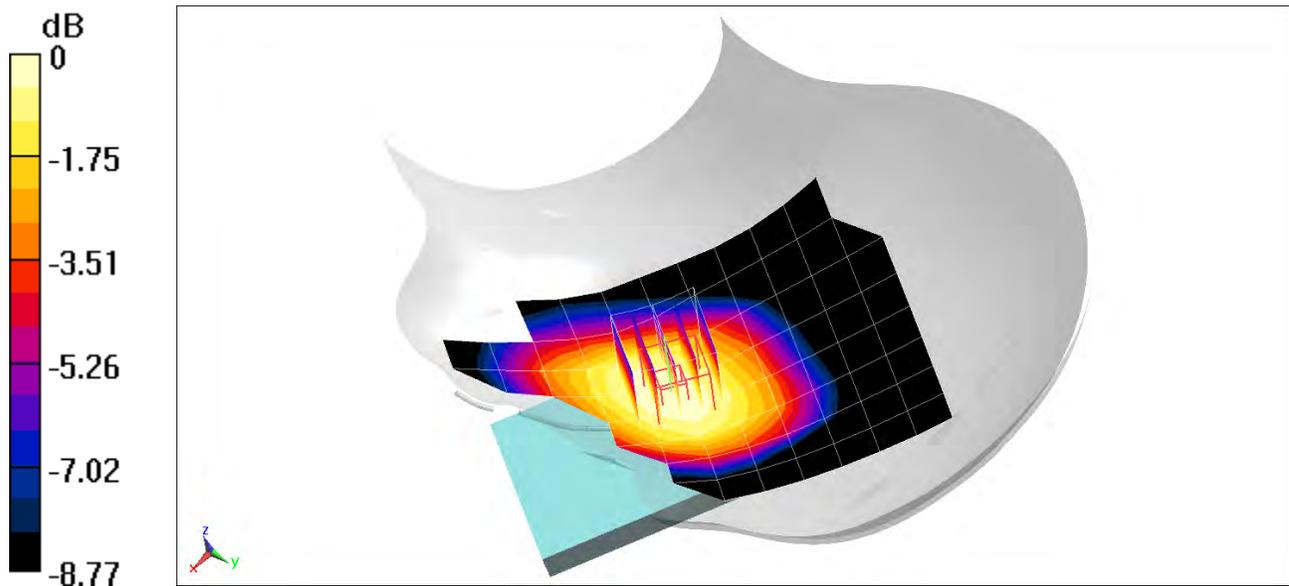

0 dB = 0.373 W/kg = -4.28 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01133


Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1
Medium: 750 Head Medium parameters used (interpolated):
 $f = 782 \text{ MHz}$; $\sigma = 0.903 \text{ S/m}$; $\epsilon_r = 40.849$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 11-28-2018; Ambient Temp: 21.0°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7491; ConvF(10.48, 10.48, 10.48); Calibrated: 7/20/2018;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1364; Calibrated: 10/18/2018
Phantom: Twin-SAM V8.0_Left; Type: QD 000 P41 AA; Serial: 1935
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 13, Left Head, Cheek, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset**

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.15 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.285 W/kg
SAR(1 g) = 0.220 W/kg

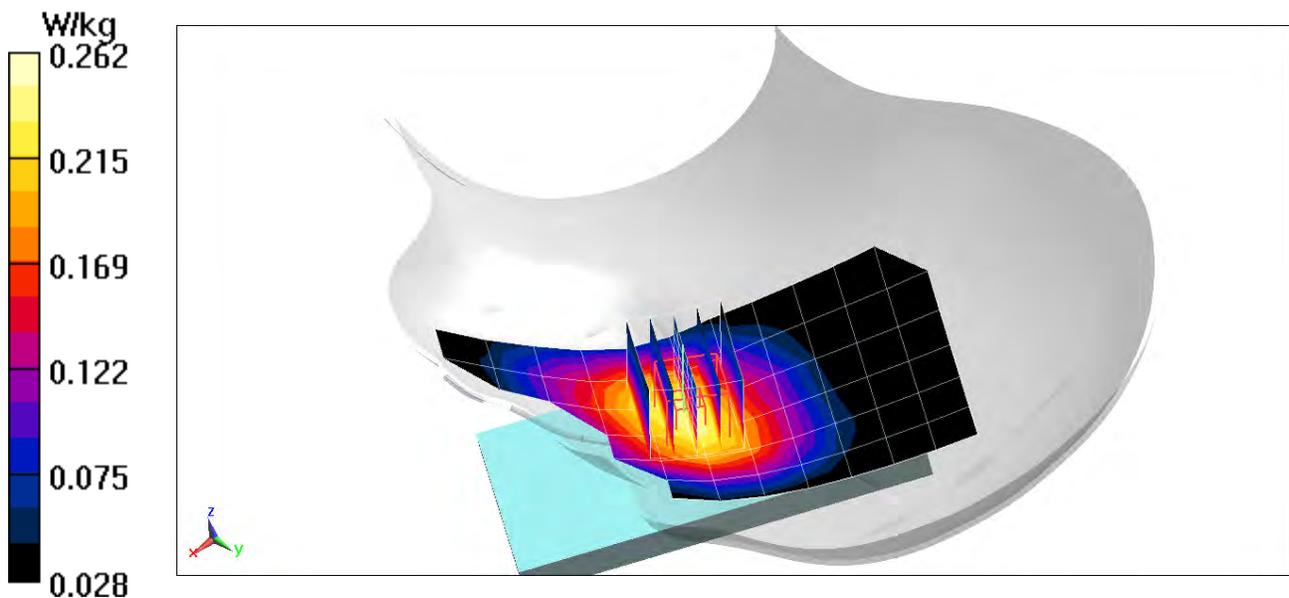

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01869

Communication System: UID 0, LTE Band 5 (Cell.); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: 850 Head Medium parameters used (interpolated):
 $f = 836.5 \text{ MHz}$; $\sigma = 0.894 \text{ S/m}$; $\epsilon_r = 40.929$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 11-28-2018; Ambient Temp: 20.4°C; Tissue Temp: 19.2°C

Probe: EX3DV4 - SN7416; ConvF(9.45, 9.45, 9.45); Calibrated: 7/20/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1402; Calibrated: 7/10/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CA; Serial: 1275

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 5 (Cell.), Left Head, Cheek, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.31 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.712 W/kg

SAR(1 g) = 0.533 W/kg

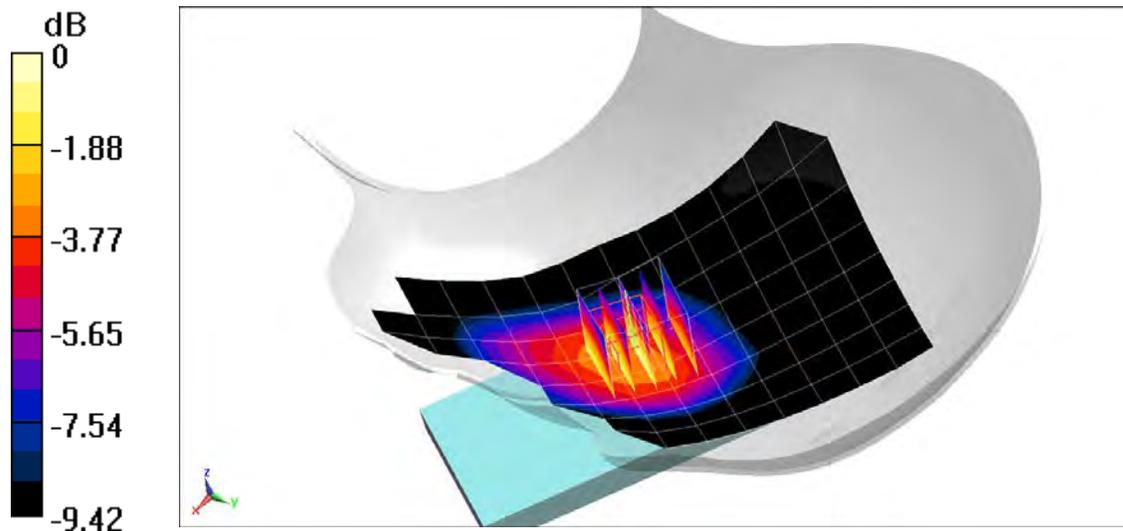

0 dB = 0.648 W/kg = -1.88 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01299


Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1770 MHz; Duty Cycle: 1:1
Medium: 1750 Head Medium parameters used (interpolated):
 $f = 1770$ MHz; $\sigma = 1.358$ S/m; $\epsilon_r = 39.758$; $\rho = 1000$ kg/m³
Phantom section: Left Section

Test Date: 11-23-2018; Ambient Temp: 19.6°C; Tissue Temp: 19.3°C

Probe: ES3DV3 - SN3275; ConvF(5.52, 5.52, 5.52); Calibrated: 4/12/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn501; Calibrated: 4/12/2018
Phantom: Twin-SAM V4.0; Type: QD 000 P40 CD; Serial: 1736
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 66 (AWS), Left Head, Cheek, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 22.76 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 0.929 W/kg
SAR(1 g) = 0.606 W/kg

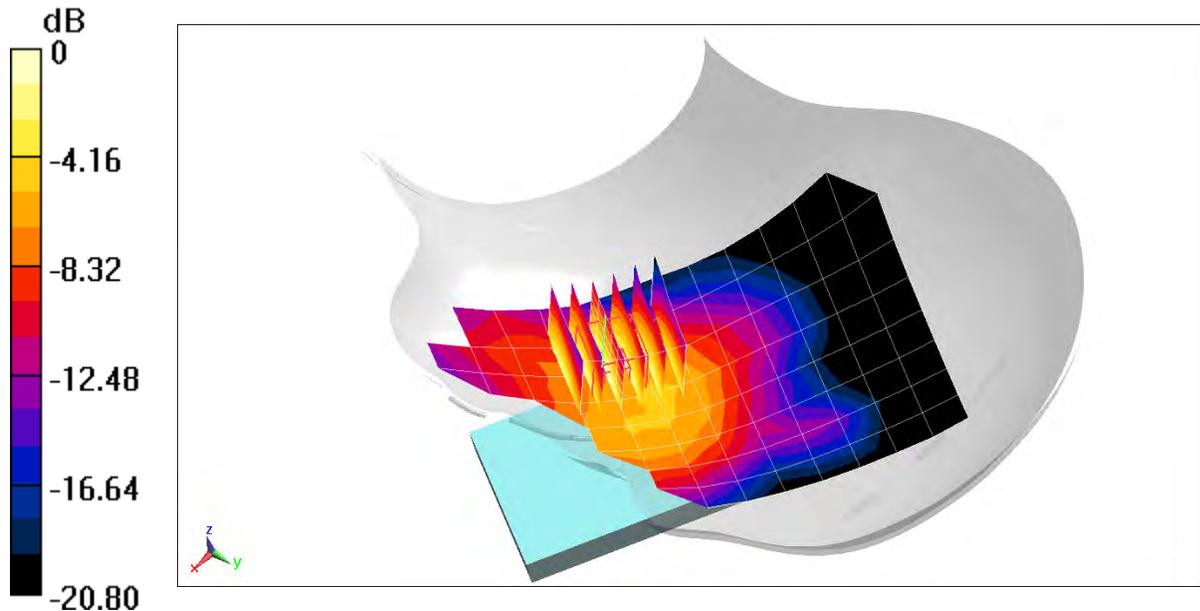

0 dB = 0.688 W/kg = -1.62 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01851


Communication System: UID 0, LTE Band 2 (PCS); Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: 1900 Head Medium parameters used (interpolated):
 $f = 1900 \text{ MHz}$; $\sigma = 1.455 \text{ S/m}$; $\epsilon_r = 38.945$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 11-23-2018; Ambient Temp: 21.4°C; Tissue Temp: 19.6°C

Probe: ES3DV3 - SN3131; ConvF(5.27, 5.27, 5.27); Calibrated: 3/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn604; Calibrated: 3/7/2018
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 2 (PCS), Left Head, Cheek, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**

Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 24.30 V/m; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 1.09 W/kg
SAR(1 g) = 0.699 W/kg

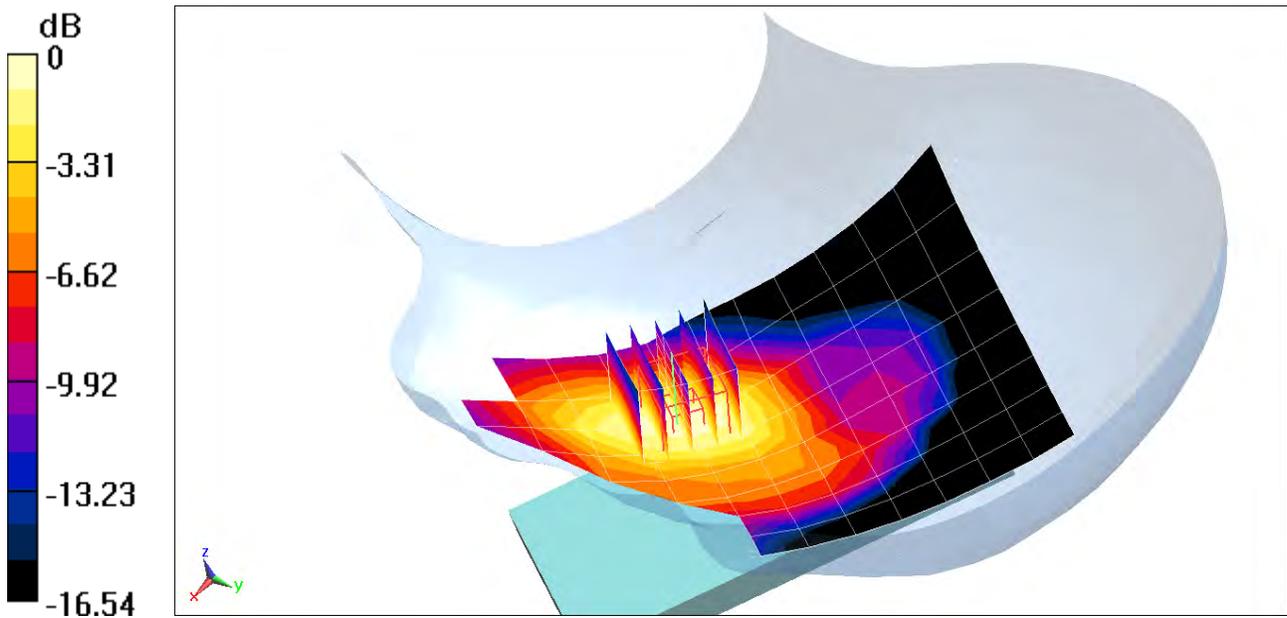

0 dB = 0.817 W/kg = -0.88 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01299


Communication System: UID 0, _IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: 2450 Head Medium parameters used (interpolated):
 $f = 2437 \text{ MHz}$; $\sigma = 1.851 \text{ S/m}$; $\epsilon_r = 39.347$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 12-5-2018; Ambient Temp: 21.9°C; Tissue Temp: 18.9°C

Probe: ES3DV3 - SN3275; ConvF(4.74, 4.74, 4.74); Calibrated: 4/12/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn501; Calibrated: 4/12/2018
Phantom: Twin-SAM V4.0; Type: QD 000 P40 CD; Serial: 1736
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: IEEE 802.11b, 22 MHz Bandwidth,
Left Head, Cheek, Ch 6, 1 Mbps**

Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm
Zoom Scan (8x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 20.48 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 2.50 W/kg
SAR(1 g) = 1 W/kg

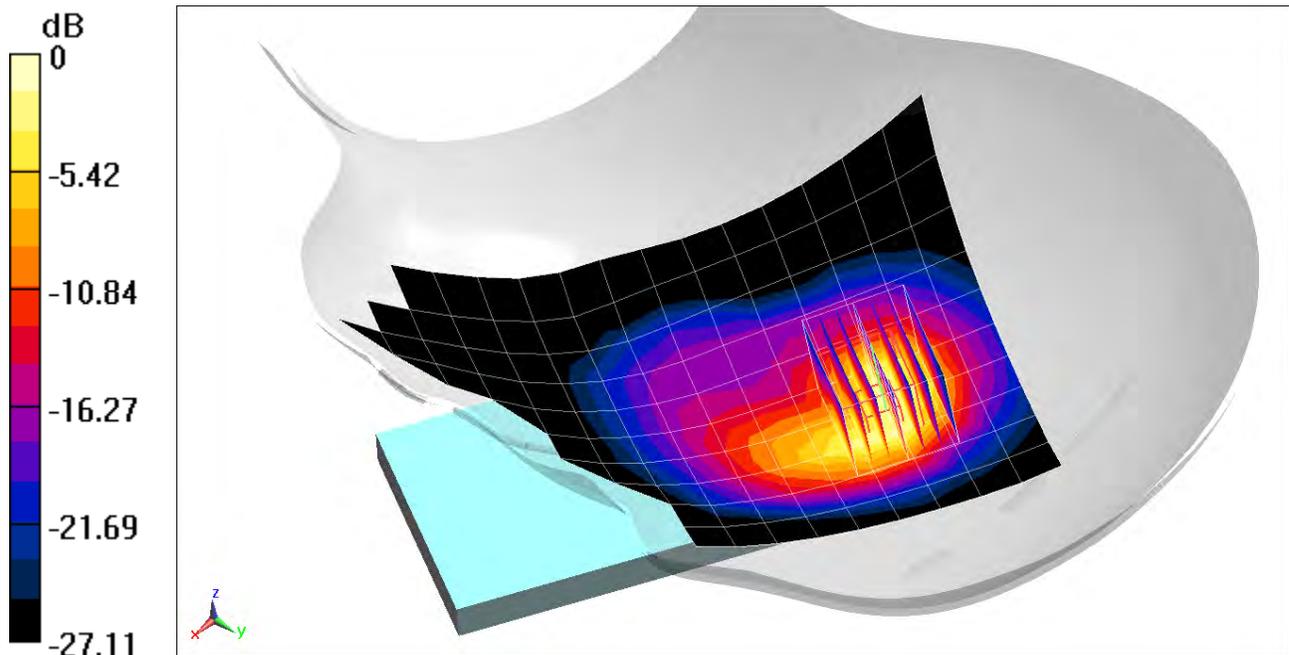

0 dB = 1.39 W/kg = 1.43 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01851


Communication System: UID 0, GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium: 835 Body Medium parameters used (interpolated):
 $f = 836.6 \text{ MHz}$; $\sigma = 1.002 \text{ S/m}$; $\epsilon_r = 53.36$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11-29-2018; Ambient Temp: 22.7°C; Tissue Temp: 20.5°C

Probe: ES3DV3 - SN3131; ConvF(6.14, 6.14, 6.14); Calibrated: 3/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn604; Calibrated: 3/7/2018
Phantom: SAM Sub; Type: QD 000 P40 CC; Serial: 1375
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: GSM 850, Body SAR, Back side, Mid.ch

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 19.80 V/m; Power Drift = 0.18 dB
Peak SAR (extrapolated) = 0.472 W/kg
SAR(1 g) = 0.367 W/kg

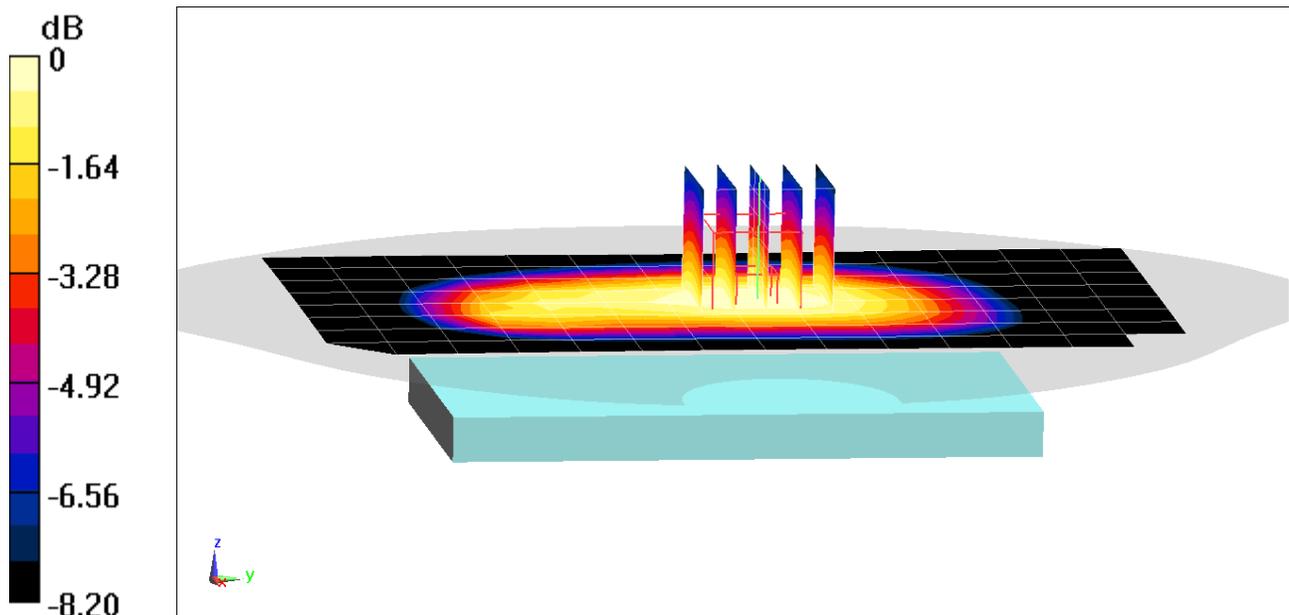

0 dB = 0.405 W/kg = -3.93 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01851


Communication System: UID 0, _GSM GPRS; 4 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.076
Medium: 835 Body Medium parameters used (interpolated):
 $f = 836.6 \text{ MHz}$; $\sigma = 0.997 \text{ S/m}$; $\epsilon_r = 53.637$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-27-2018; Ambient Temp: 22.6°C; Tissue Temp: 20.1°C

Probe: ES3DV3 - SN3131; ConvF(6.14, 6.14, 6.14); Calibrated: 3/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn604; Calibrated: 3/7/2018
Phantom: SAM Sub; Type: QD 000 P40 CC; Serial: 1375
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: GPRS 850, Body SAR, Back side, Mid.ch, 4 Tx Slots

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 25.07 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 1.46 W/kg
SAR(1 g) = 0.882 W/kg

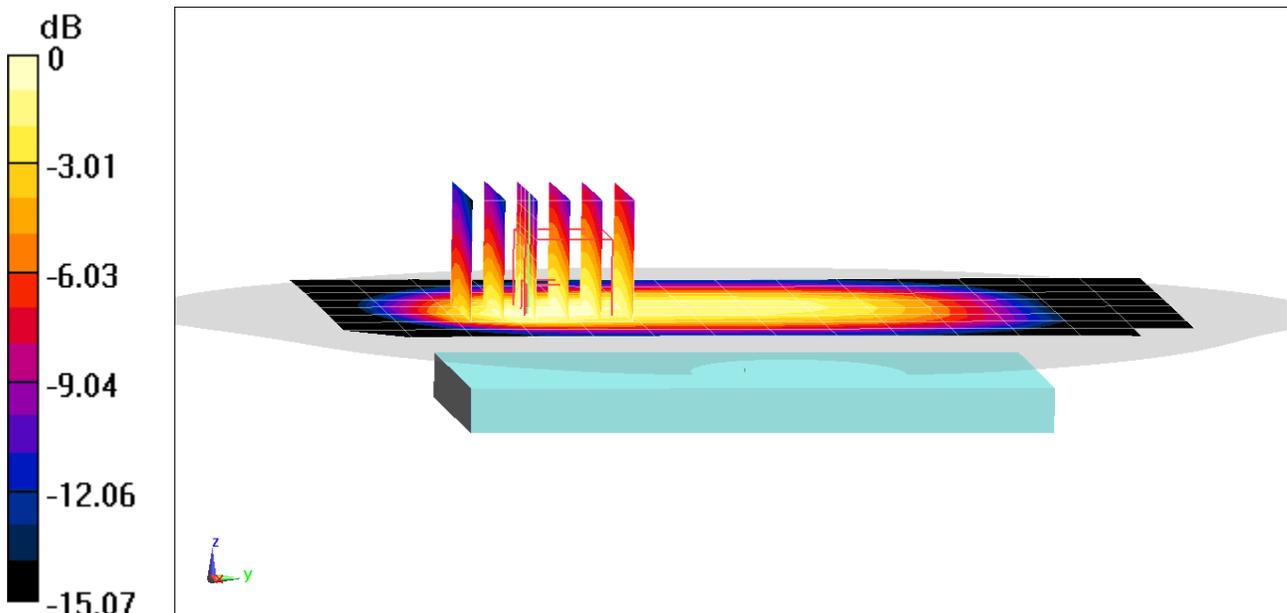

0 dB = 1.01 W/kg = 0.04 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01229

Communication System: UID 0, GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.572 \text{ S/m}$; $\epsilon_r = 52.599$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11-28-2018; Ambient Temp: 22.6°C; Tissue Temp: 21.3°C

Probe: ES3DV3 - SN3329; ConvF(4.84, 4.84, 4.84); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1403; Calibrated: 2/8/2018

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: GSM 1900, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.83 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.406 W/kg

SAR(1 g) = 0.262 W/kg

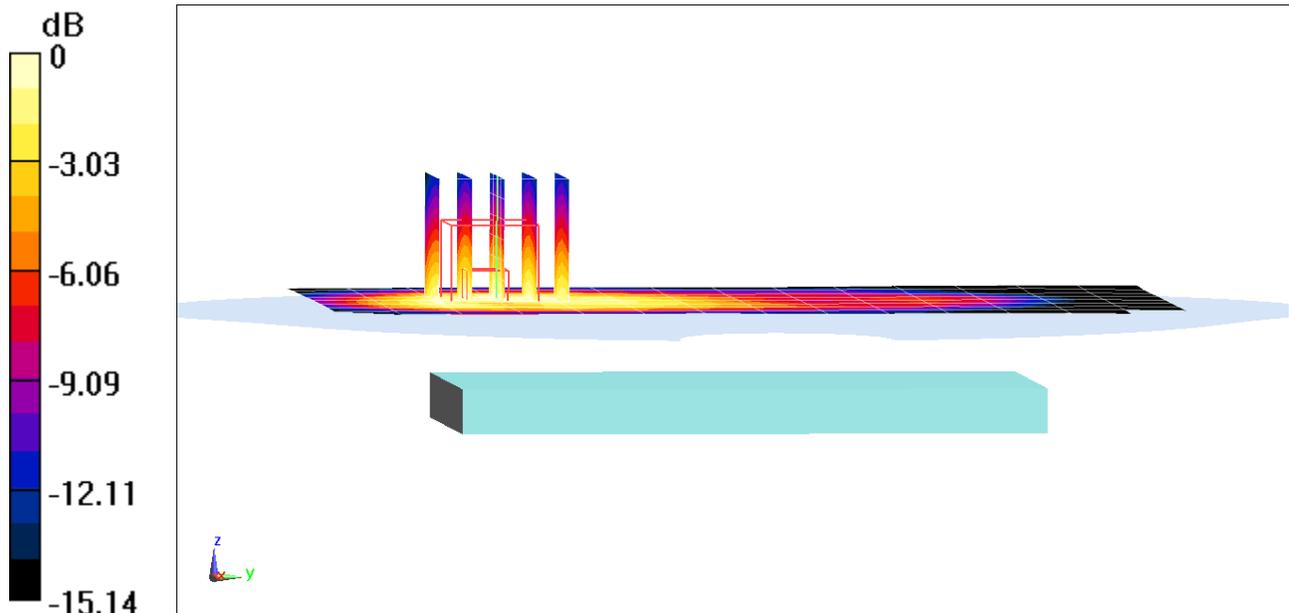

0 dB = 0.307 W/kg = -5.13 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01229

Communication System: UID 0, _GSM GPRS; 4 Tx slots; Frequency: 1850.2 MHz; Duty Cycle: 1:2.076

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1850.2$ MHz; $\sigma = 1.552$ S/m; $\epsilon_r = 52.643$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-28-2018; Ambient Temp: 22.6°C; Tissue Temp: 21.3°C

Probe: ES3DV3 - SN3329; ConvF(4.84, 4.84, 4.84); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1403; Calibrated: 2/8/2018

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: GPRS 1900, Body SAR, Front side, Low.ch, 4 Tx Slots


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.39 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.813 W/kg

SAR(1 g) = 0.519 W/kg

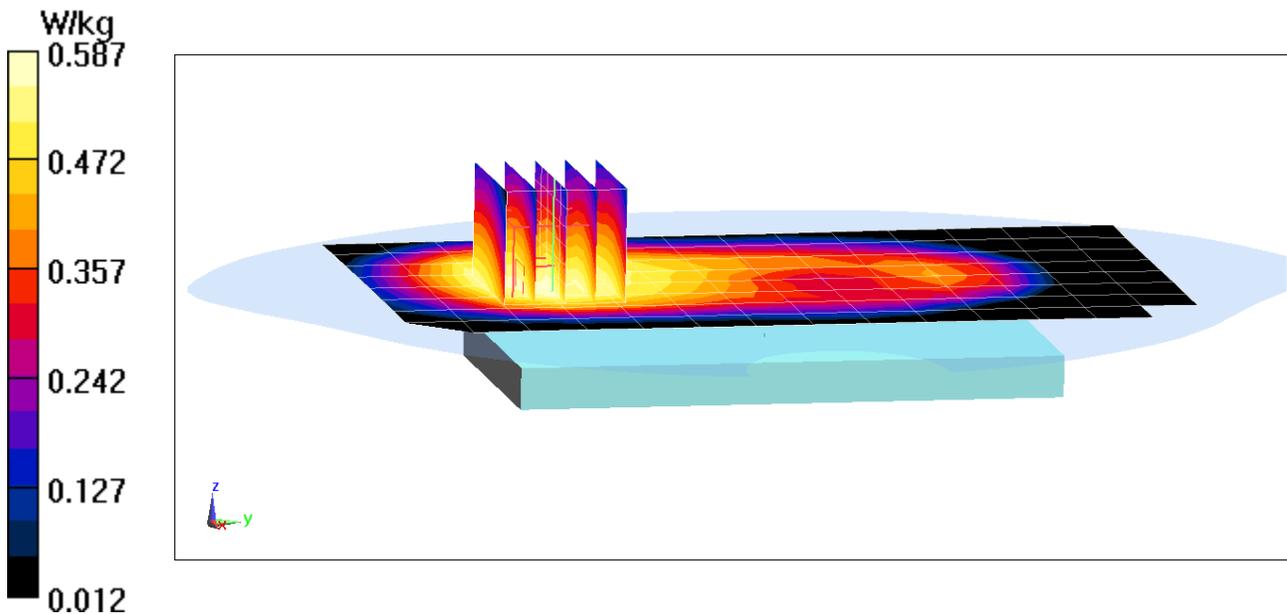

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01851

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: 835 Body Medium parameters used (interpolated):
 $f = 836.6 \text{ MHz}$; $\sigma = 0.997 \text{ S/m}$; $\epsilon_r = 53.637$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11-27-2018; Ambient Temp: 22.6°C; Tissue Temp: 20.1°C

Probe: ES3DV3 - SN3131; ConvF(6.14, 6.14, 6.14); Calibrated: 3/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn604; Calibrated: 3/7/2018
Phantom: SAM Sub; Type: QD 000 P40 CC; Serial: 1375
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: UMTS 850, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.00 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.355 W/kg

SAR(1 g) = 0.277 W/kg

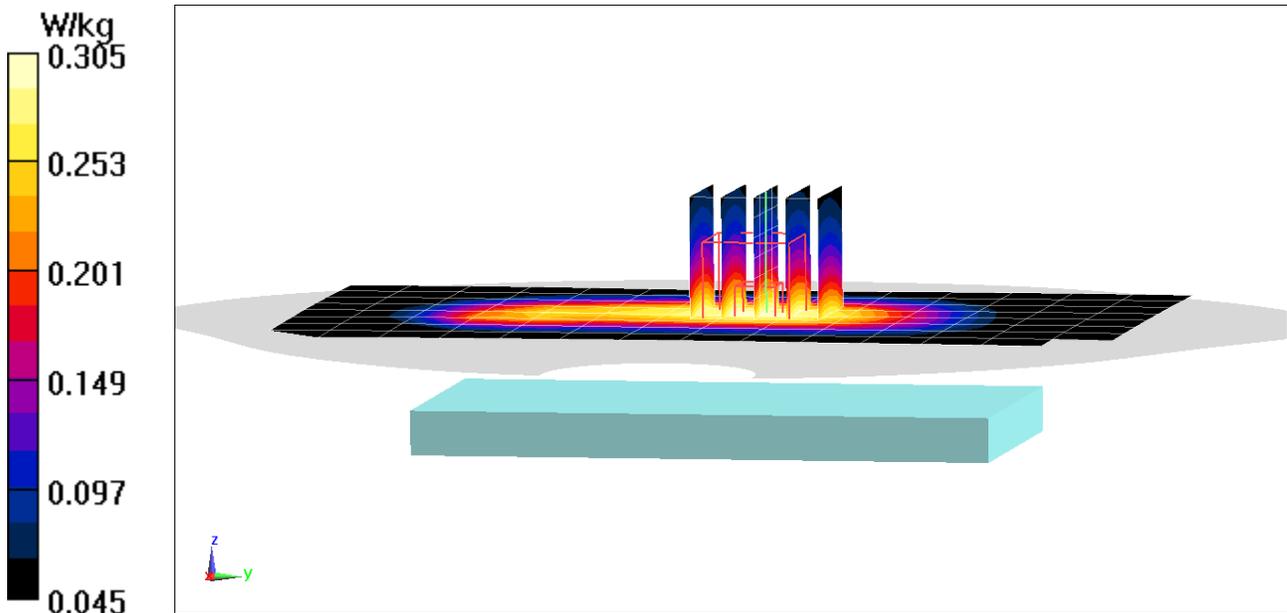

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01851

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: 835 Body Medium parameters used (interpolated):
 $f = 836.6 \text{ MHz}$; $\sigma = 0.997 \text{ S/m}$; $\epsilon_r = 53.637$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-27-2018; Ambient Temp: 22.6°C; Tissue Temp: 20.1°C

Probe: ES3DV3 - SN3131; ConvF(6.14, 6.14, 6.14); Calibrated: 3/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn604; Calibrated: 3/7/2018
Phantom: SAM Sub; Type: QD 000 P40 CC; Serial: 1375
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: UMTS 850, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.39 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.724 W/kg

SAR(1 g) = 0.422 W/kg

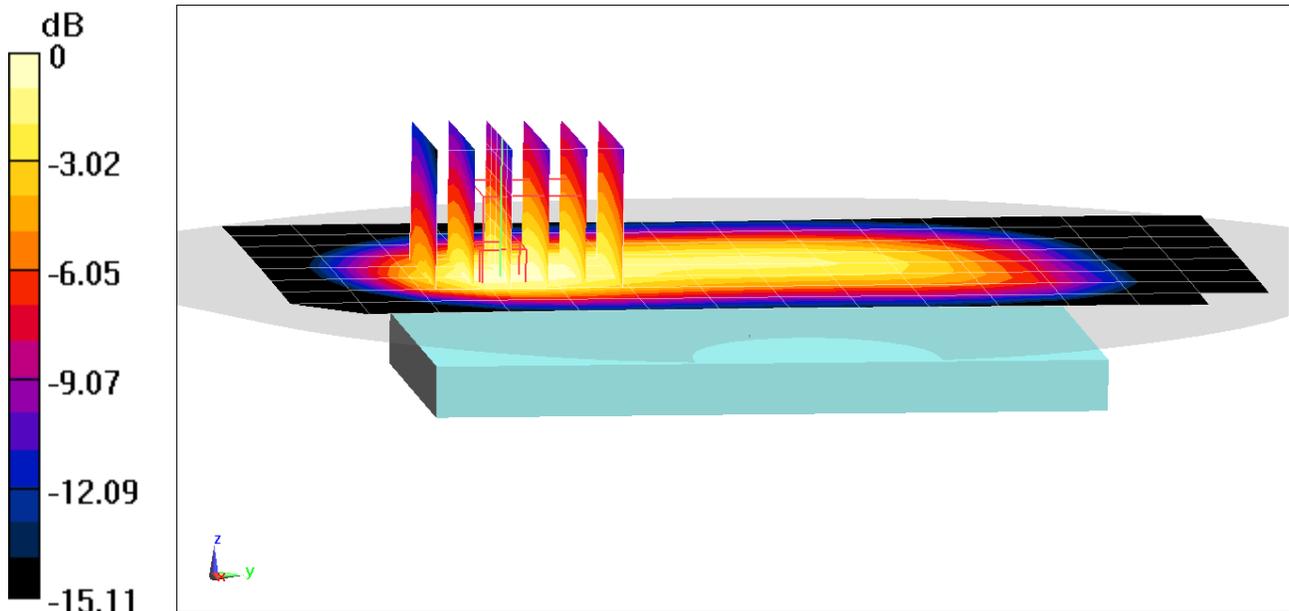

0 dB = 0.493 W/kg = -3.07 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01869

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1
Medium: 1750 Body Medium parameters used (interpolated):
 $f = 1732.4$ MHz; $\sigma = 1.468$ S/m; $\epsilon_r = 52.718$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-14-2019; Ambient Temp: 22.0°C; Tissue Temp: 20.6°C

Probe: ES3DV3 - SN3329; ConvF(5.04, 5.04, 5.04); Calibrated: 2/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1403; Calibrated: 2/8/2018
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: UMTS 1750, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.90 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.730 W/kg

SAR(1 g) = 0.445 W/kg

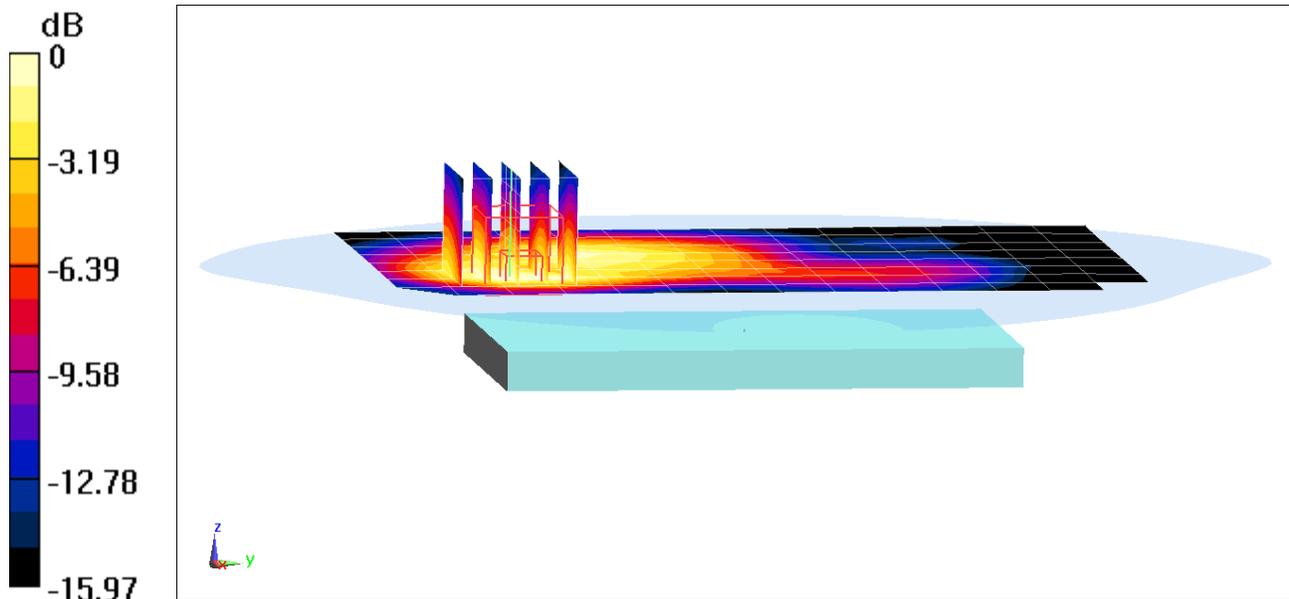

0 dB = 0.530 W/kg = -2.76 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01869


Communication System: UID 0, UMTS; Frequency: 1712.4 MHz; Duty Cycle: 1:1
Medium: 1750 Body Medium parameters used (interpolated):
 $f = 1712.4 \text{ MHz}$; $\sigma = 1.45 \text{ S/m}$; $\epsilon_r = 53.12$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-02-2019; Ambient Temp: 19.6°C; Tissue Temp: 18.7°C

Probe: ES3DV3 - SN3275; ConvF(5.08, 5.08, 5.08); Calibrated: 4/12/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn501; Calibrated: 4/12/2018
Phantom: Twin-SAM V4.0; Type: QD 000 P40 CD; Serial: 1736
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: UMTS 1750, Body SAR, Back side, Low.ch

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 29.87 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 2.10 W/kg
SAR(1 g) = 1.11 W/kg

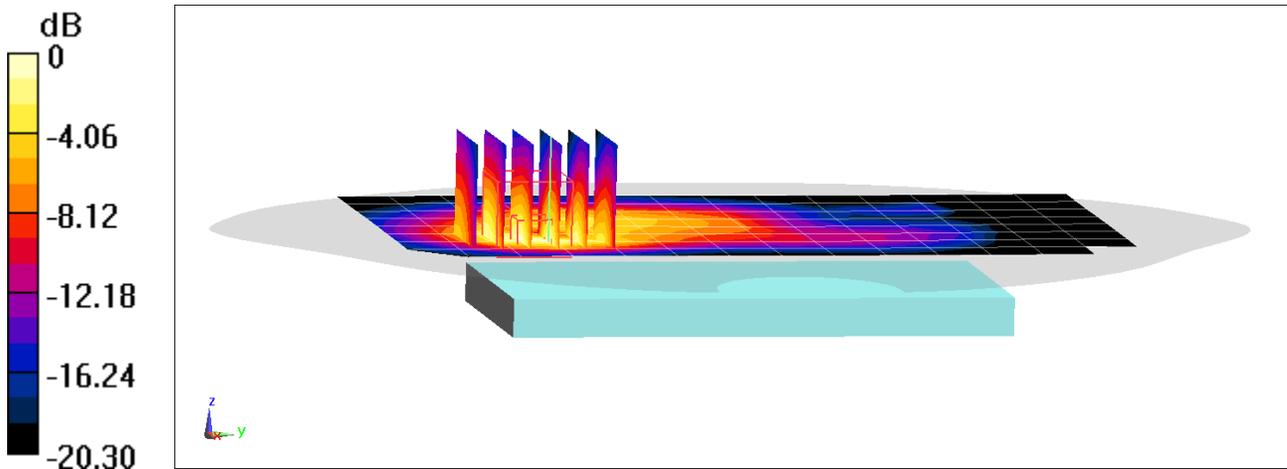

0 dB = 1.41 W/kg = 1.49 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01869

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.573 \text{ S/m}$; $\epsilon_r = 52.49$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-14-2019; Ambient Temp: 23.0°C; Tissue Temp: 21.0°C

Probe: ES3DV3 - SN3329; ConvF(4.84, 4.84, 4.84); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1403; Calibrated: 2/8/2018

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: UMTS 1900, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.93 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.709 W/kg

SAR(1 g) = 0.461 W/kg

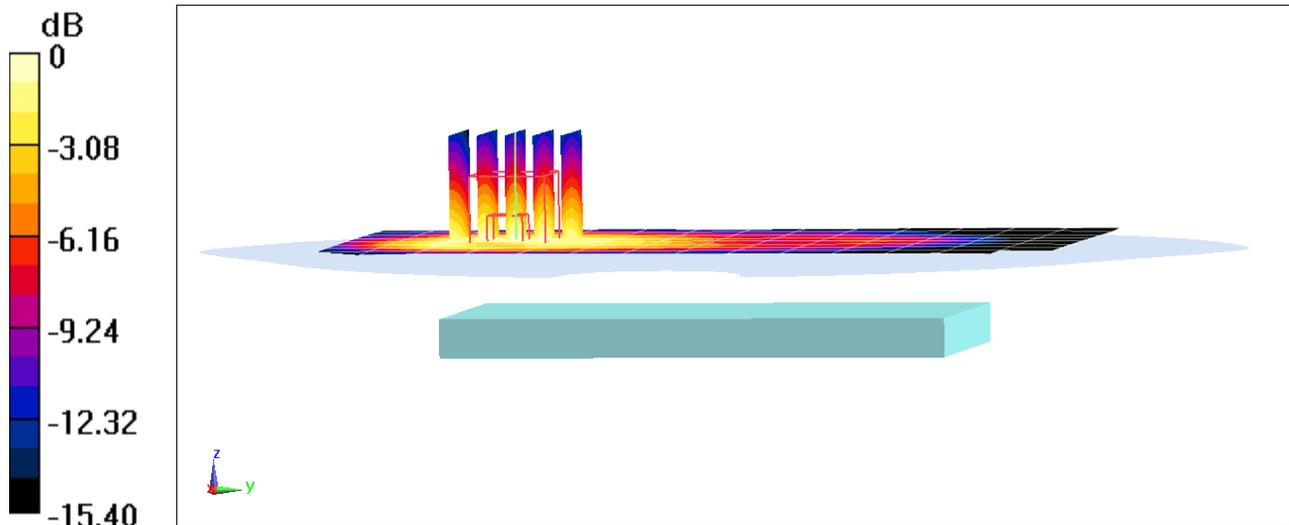

0 dB = 0.539 W/kg = -2.68 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01299


Communication System: UID 0, UMTS, Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium: 1900 Body Medium parameters used (interpolated):
 $f = 1907.6$ MHz; $\sigma = 1.593$ S/m; $\epsilon_r = 52.66$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-26-2018; Ambient Temp: 20.7°C; Tissue Temp: 19.2°C

Probe: ES3DV3 - SN3329; ConvF(4.84, 4.84, 4.84); Calibrated: 2/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1403; Calibrated: 2/8/2018
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Mode: UMTS 1900, Body SAR, Front side, High.ch

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 19.17 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.898 W/kg
SAR(1 g) = 0.561 W/kg

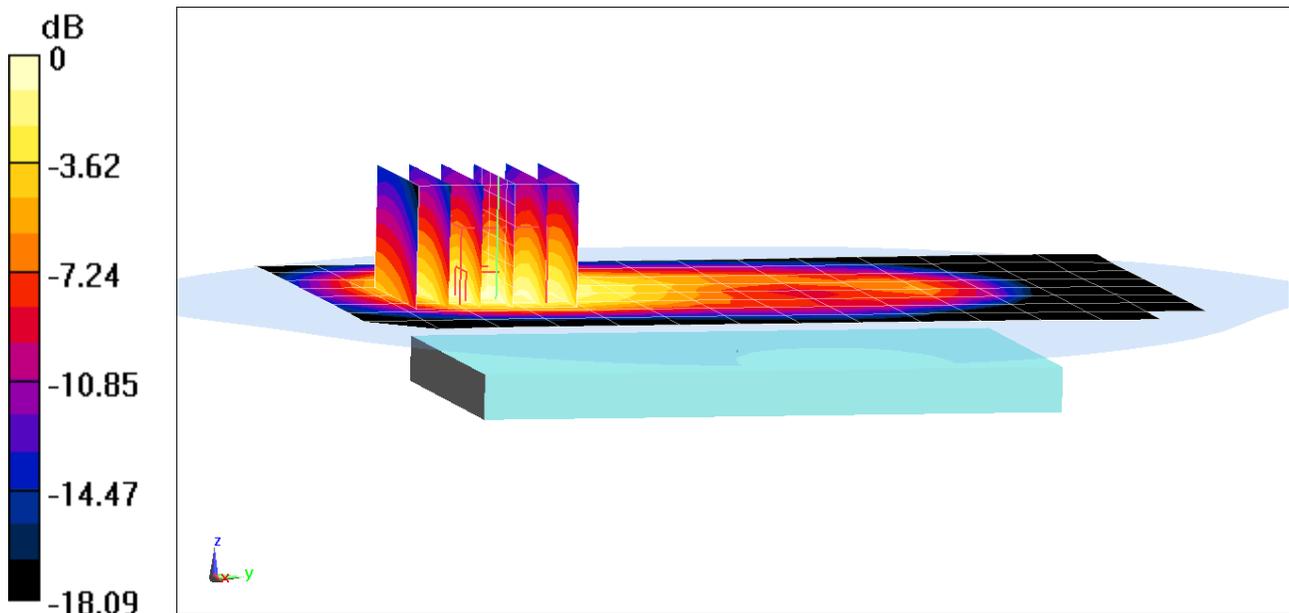

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01851

Communication System: UID 0, LTE Band 71; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: 695 - 785 MHz Body Medium parameters used (interpolated):

$f = 680.5 \text{ MHz}$; $\sigma = 0.914 \text{ S/m}$; $\epsilon_r = 55.093$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 12-3-2018; Ambient Temp: 19.4°C; Tissue Temp: 18.5°C

Probe: ES3DV3 - SN3329; ConvF(6.32, 6.32, 6.32); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1403; Calibrated: 2/8/2018

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 71, Body SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.84 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.455 W/kg

SAR(1 g) = 0.350 W/kg

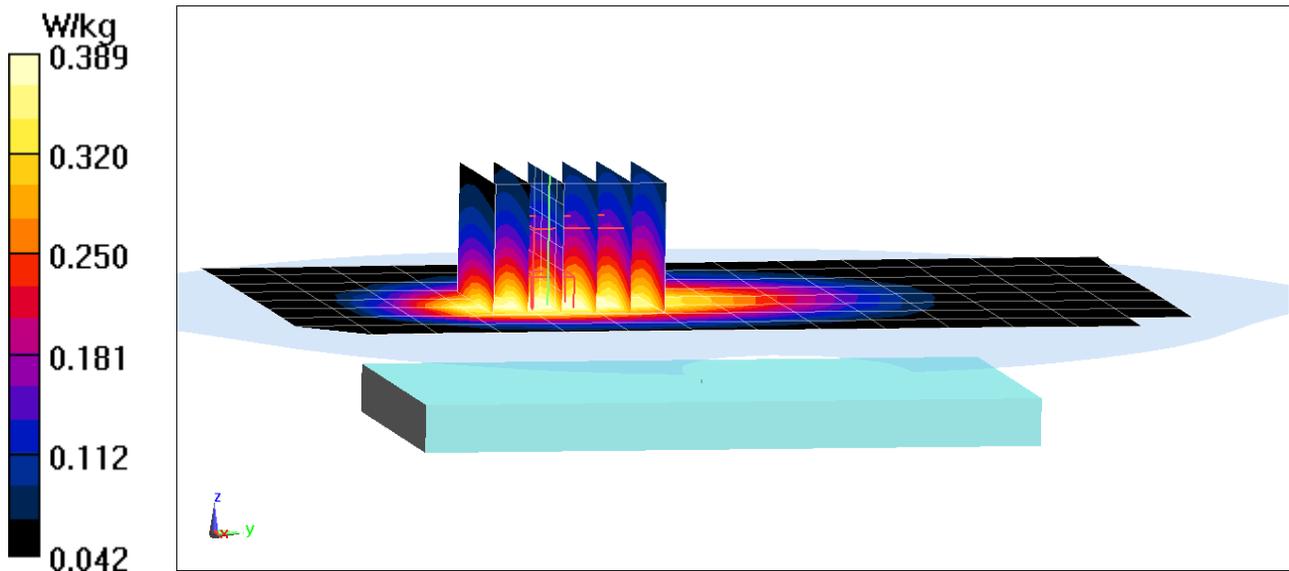

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01851

Communication System: UID 0, LTE Band 71; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: 695 - 785 MHz Body Medium parameters used (interpolated):

$f = 680.5 \text{ MHz}$; $\sigma = 0.914 \text{ S/m}$; $\epsilon_r = 55.093$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 12-3-2018; Ambient Temp: 19.4°C; Tissue Temp: 18.5°C

Probe: ES3DV3 - SN3329; ConvF(6.32, 6.32, 6.32); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1403; Calibrated: 2/8/2018

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 71, Body SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.55 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.784 W/kg

SAR(1 g) = 0.503 W/kg

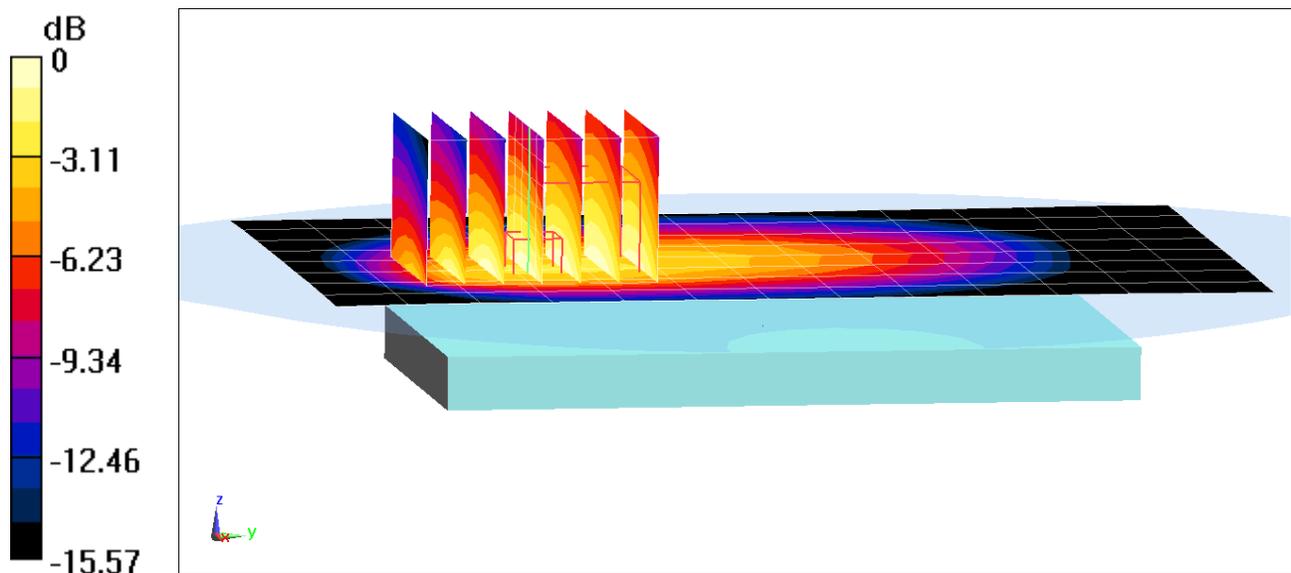

0 dB = 0.566 W/kg = -2.47 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01229

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 695 - 785 MHz Body Medium parameters used (interpolated):

$f = 707.5$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 54.968$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11-29-2018; Ambient Temp: 20.5°C; Tissue Temp: 20.1°C

Probe: ES3DV3 - SN3329; ConvF(6.32, 6.32, 6.32); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1403; Calibrated: 2/8/2018

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 12, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.73 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.489 W/kg

SAR(1 g) = 0.386 W/kg

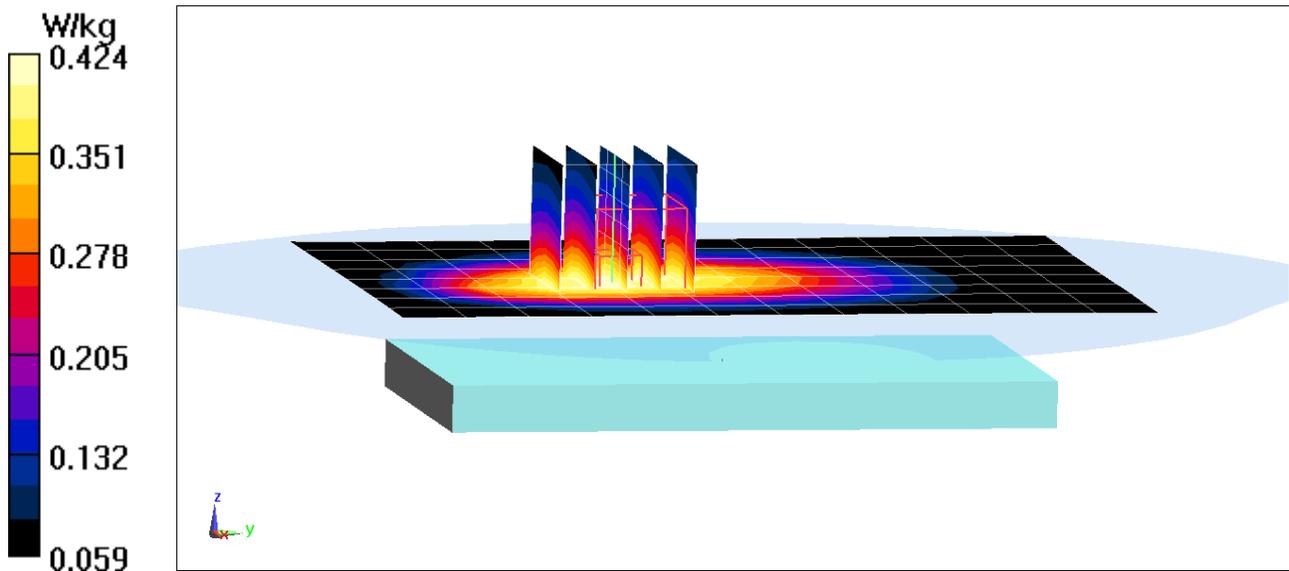

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01229

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 695 - 785 MHz Body Medium parameters used (interpolated):

$f = 707.5$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 54.968$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-29-2018; Ambient Temp: 20.5°C; Tissue Temp: 20.1°C

Probe: ES3DV3 - SN3329; ConvF(6.32, 6.32, 6.32); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1403; Calibrated: 2/8/2018

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 12, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x8x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.84 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.743 W/kg

SAR(1 g) = 0.512 W/kg

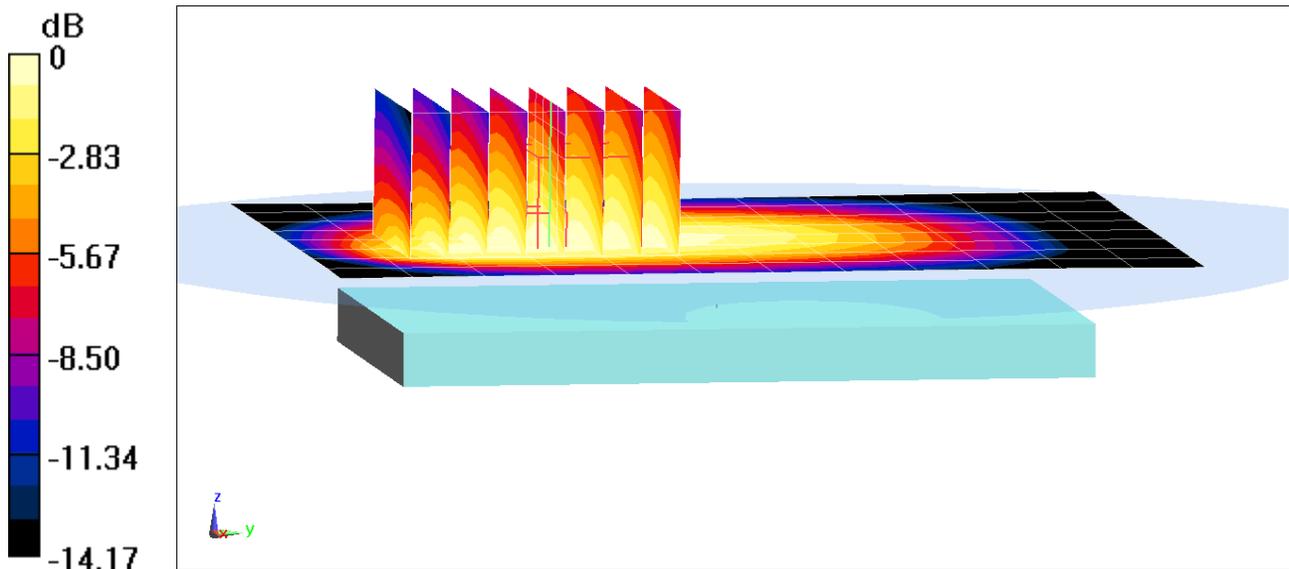

0 dB = 0.566 W/kg = -2.47 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01229

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 695 - 785 MHz Body Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.957 \text{ S/m}$; $\epsilon_r = 54.816$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11-29-2018; Ambient Temp: 20.5°C; Tissue Temp: 20.1°C

Probe: ES3DV3 - SN3329; ConvF(6.32, 6.32, 6.32); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1403; Calibrated: 2/8/2018

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 13, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.24 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.324 W/kg

SAR(1 g) = 0.260 W/kg

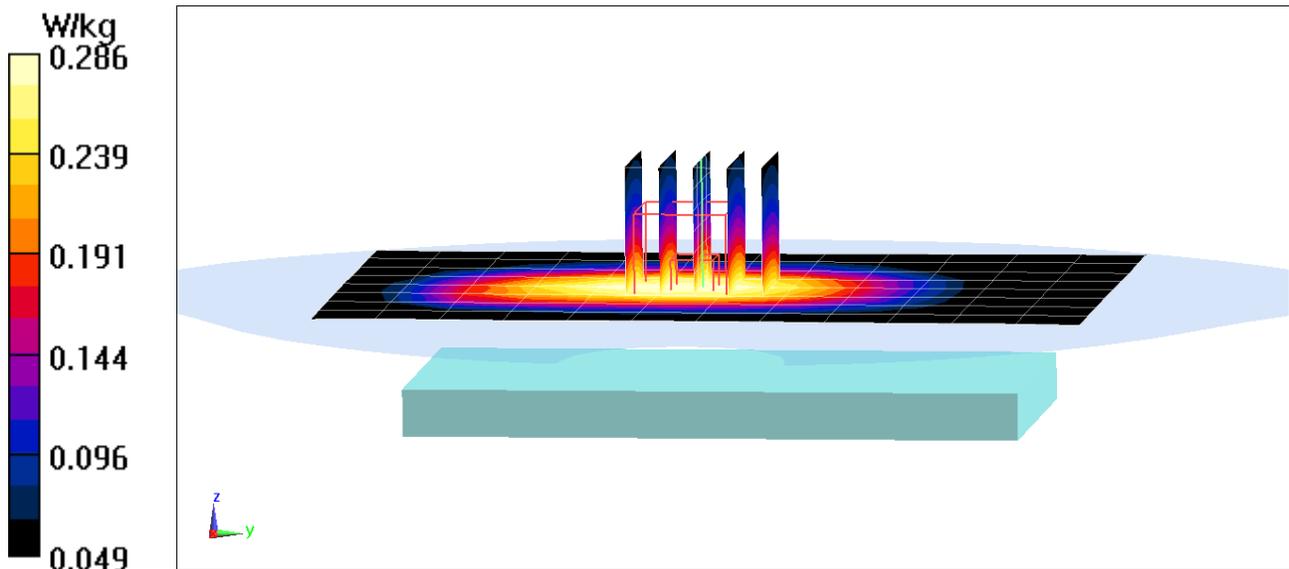

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01229

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 695 - 785 MHz Body Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.957 \text{ S/m}$; $\epsilon_r = 54.816$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-29-2018; Ambient Temp: 20.5°C; Tissue Temp: 20.1°C

Probe: ES3DV3 - SN3329; ConvF(6.32, 6.32, 6.32); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1403; Calibrated: 2/8/2018

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 13, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.58 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.359 W/kg

SAR(1 g) = 0.291 W/kg

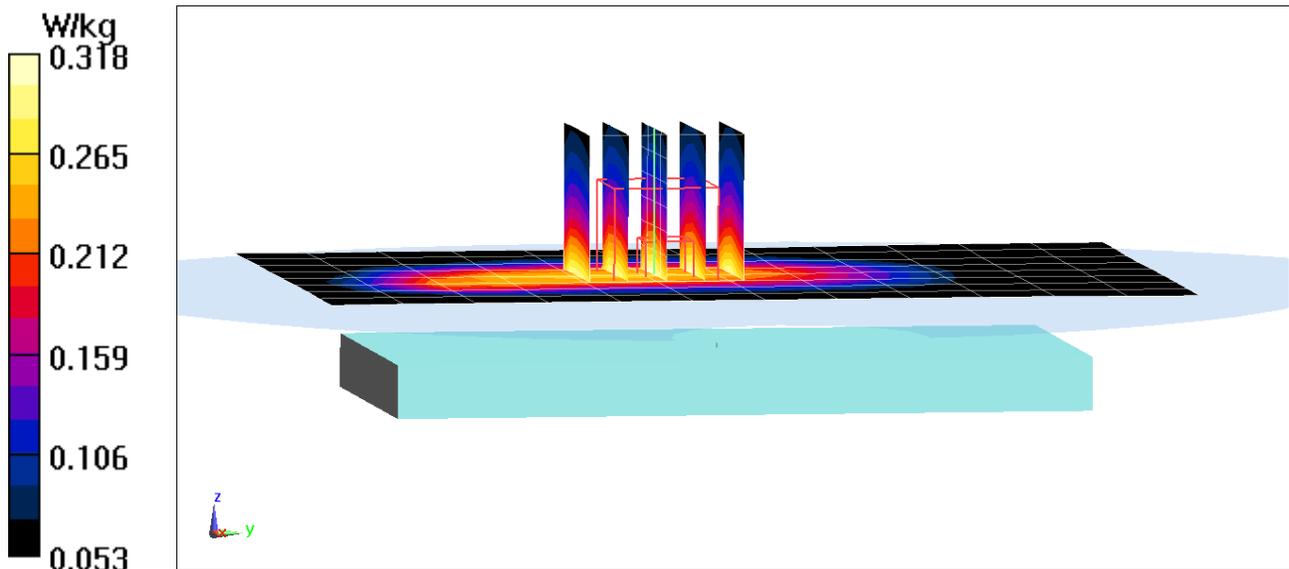

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01851


Communication System: UID 0, LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: 835 Body Medium parameters used (interpolated):
 $f = 836.5 \text{ MHz}$; $\sigma = 0.996 \text{ S/m}$; $\epsilon_r = 53.638$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11-27-2018; Ambient Temp: 22.6°C; Tissue Temp: 20.1°C

Probe: ES3DV3 - SN3131; ConvF(6.14, 6.14, 6.14); Calibrated: 3/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn604; Calibrated: 3/7/2018
Phantom: SAM Sub; Type: QD 000 P40 CC; Serial: 1375
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 5 (Cell.), Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (6x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 20.51 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 0.545 W/kg
SAR(1 g) = 0.422 W/kg

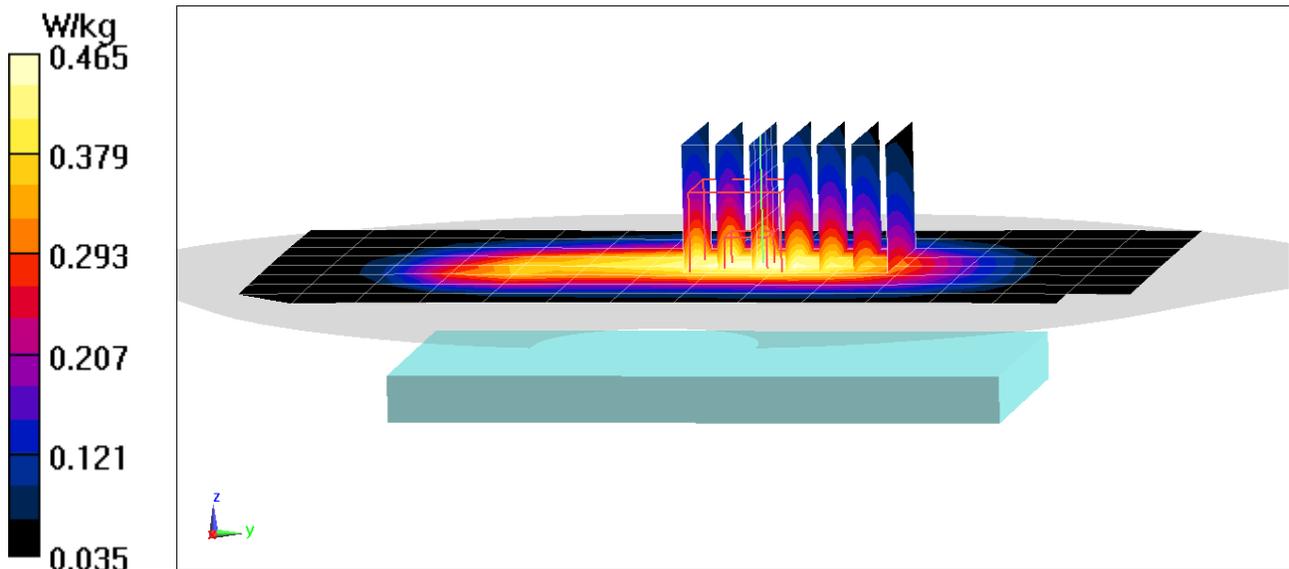

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01851

Communication System: UID 0, LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.5$ MHz; $\sigma = 0.996$ S/m; $\epsilon_r = 53.638$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-27-2018; Ambient Temp: 22.6°C; Tissue Temp: 20.1°C

Probe: ES3DV3 - SN3131; ConvF(6.14, 6.14, 6.14); Calibrated: 3/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn604; Calibrated: 3/7/2018

Phantom: SAM Sub; Type: QD 000 P40 CC; Serial: 1375

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 5 (Cell.), Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.43 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.594 W/kg

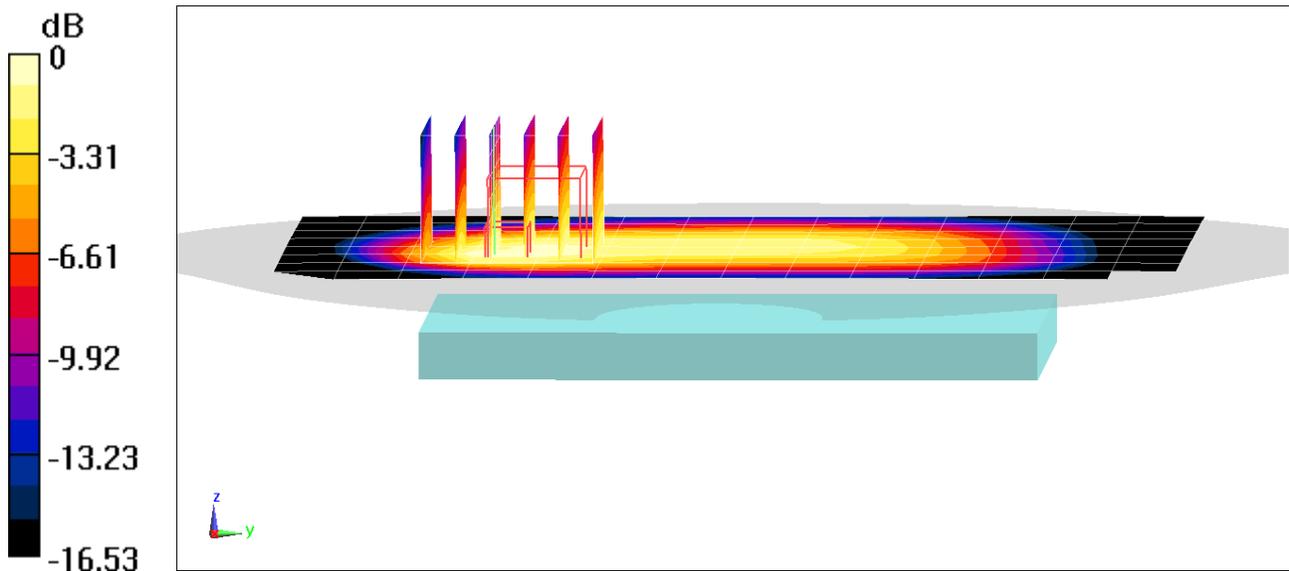

0 dB = 0.702 W/kg = -1.54 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01851

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1770 \text{ MHz}$; $\sigma = 1.57 \text{ S/m}$; $\epsilon_r = 51.658$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11-26-2018; Ambient Temp: 21.1°C; Tissue Temp: 20.1°C

Probe: ES3DV3 - SN3131; ConvF(5.03, 5.03, 5.03); Calibrated: 3/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn604; Calibrated: 3/7/2018

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 66 (AWS), Body SAR, Back side, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.43 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.753 W/kg

SAR(1 g) = 0.427 W/kg

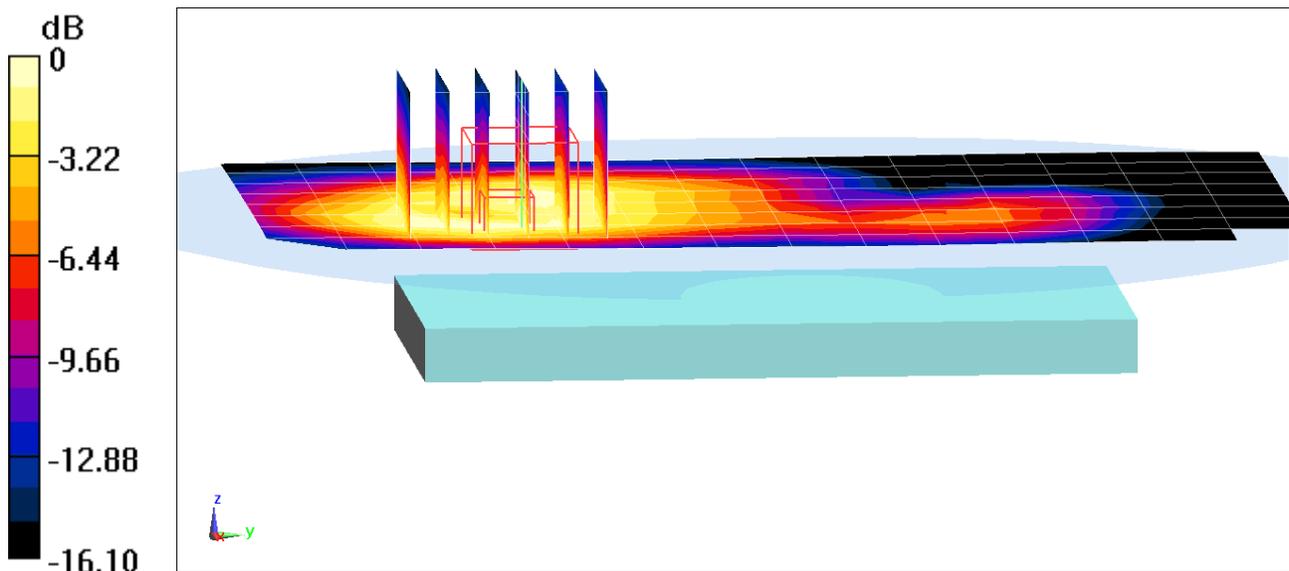

0 dB = 0.522 W/kg = -2.82 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01851

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1720 \text{ MHz}$; $\sigma = 1.523 \text{ S/m}$; $\epsilon_r = 51.807$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-26-2018; Ambient Temp: 21.1°C; Tissue Temp: 20.1°C

Probe: ES3DV3 - SN3131; ConvF(5.03, 5.03, 5.03); Calibrated: 3/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn604; Calibrated: 3/7/2018

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 66 (AWS), Body SAR, Back side, Low.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.30 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.26 W/kg

SAR(1 g) = 1.15 W/kg

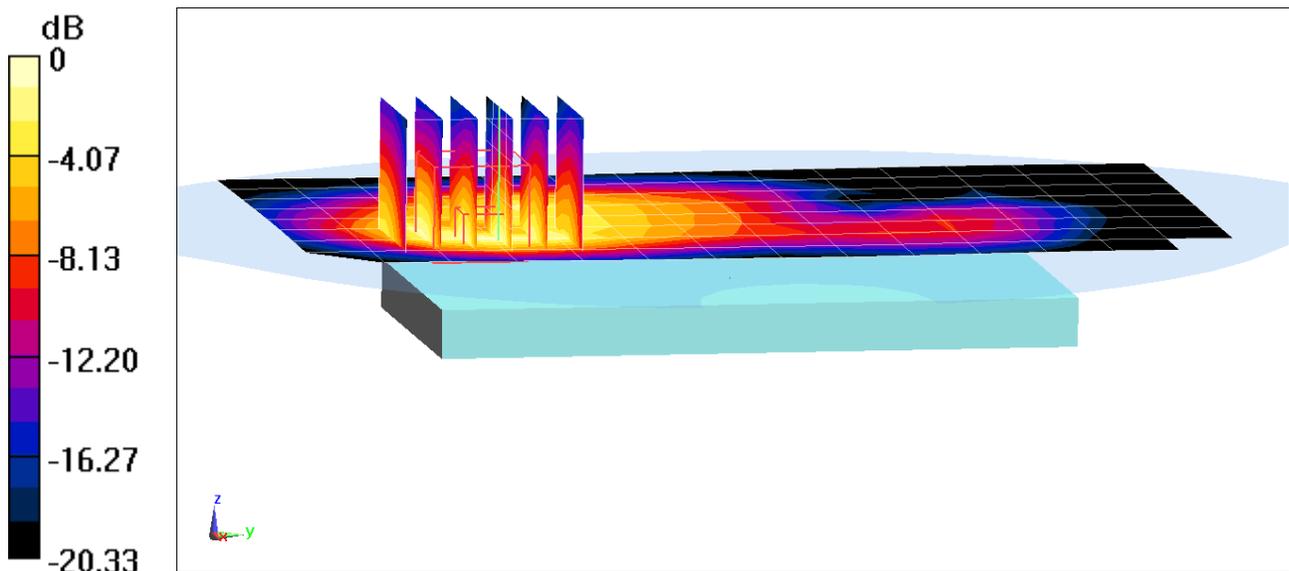

0 dB = 1.48 W/kg = 1.70 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01229


Communication System: UID 0, LTE Band 2 (PCS); Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: 1900 Body Medium parameters used (interpolated):
 $f = 1900 \text{ MHz}$; $\sigma = 1.588 \text{ S/m}$; $\epsilon_r = 52.675$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11-26-2018; Ambient Temp: 20.7°C; Tissue Temp: 19.2°C

Probe: ES3DV3 - SN3329; ConvF(4.84, 4.84, 4.84); Calibrated: 2/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1403; Calibrated: 2/8/2018
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 2 (PCS), Body SAR, Back side, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 18.64 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.748 W/kg
SAR(1 g) = 0.482 W/kg

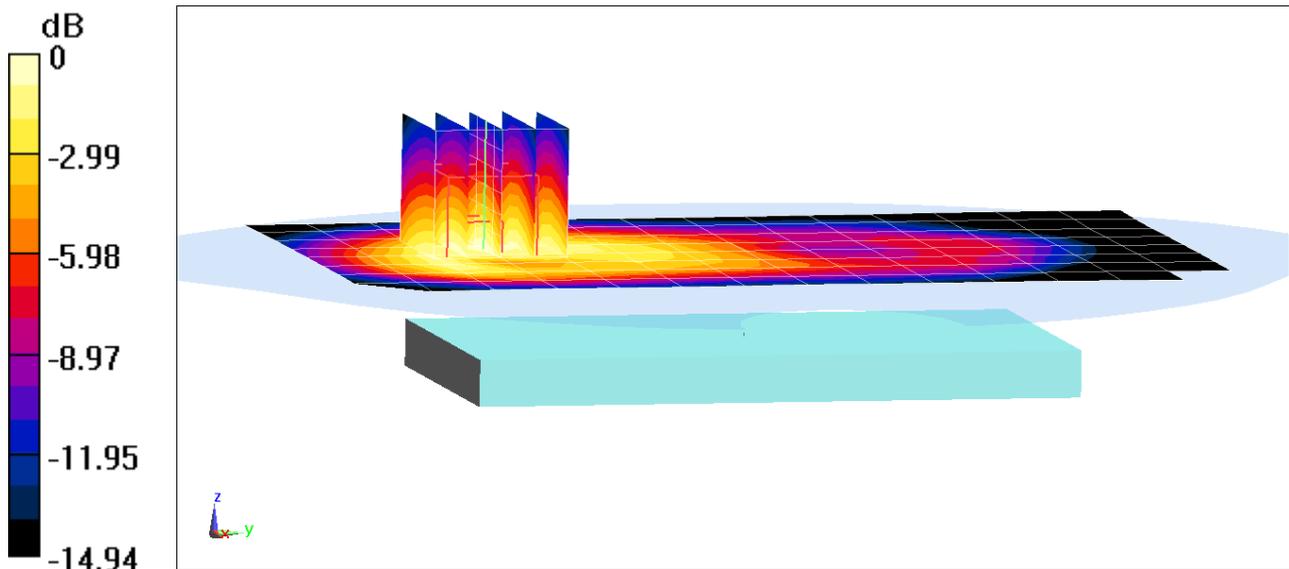

0 dB = 0.568 W/kg = -2.46 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01229


Communication System: UID 0, _LTE Band 2 (PCS); Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: 1900 Body Medium parameters used (interpolated):
 $f = 1900 \text{ MHz}$; $\sigma = 1.588 \text{ S/m}$; $\epsilon_r = 52.675$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-26-2018; Ambient Temp: 20.7°C; Tissue Temp: 19.2°C

Probe: ES3DV3 - SN3329; ConvF(4.84, 4.84, 4.84); Calibrated: 2/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1403; Calibrated: 2/8/2018
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: LTE Band 2 (PCS), Body SAR, Front side, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**

Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 19.18 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.899 W/kg
SAR(1 g) = 0.561 W/kg

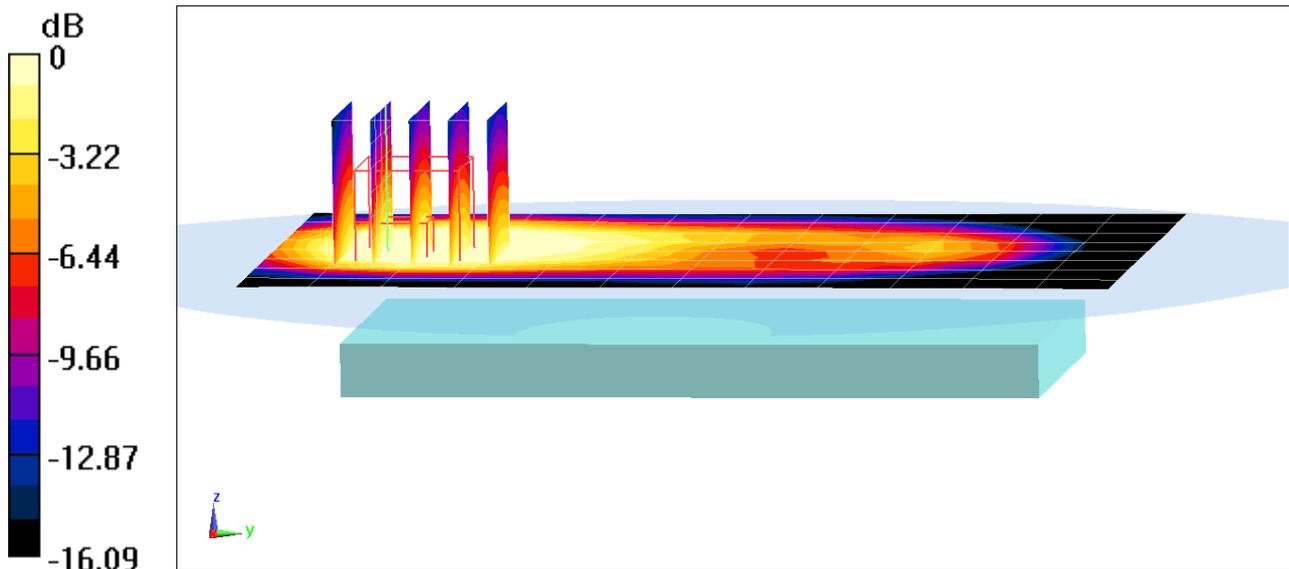

0 dB = 0.642 W/kg = -1.92 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01133

Communication System: UID 0, _IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium: 2450 Body Medium parameters used (interpolated):
 $f = 2412 \text{ MHz}$; $\sigma = 1.975 \text{ S/m}$; $\epsilon_r = 50.573$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 12-5-2018; Ambient Temp: 20.5°C; Tissue Temp: 19.0°C

Probe: ES3DV3 - SN3329; ConvF(4.5, 4.5, 4.5); Calibrated: 2/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1403; Calibrated: 2/8/2018
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: IEEE 802.11b, 22 MHz Bandwidth,
Body SAR, Ch 1, 1 Mbps, Back Side**


Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.907 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.353 W/kg

SAR(1 g) = 0.181 W/kg

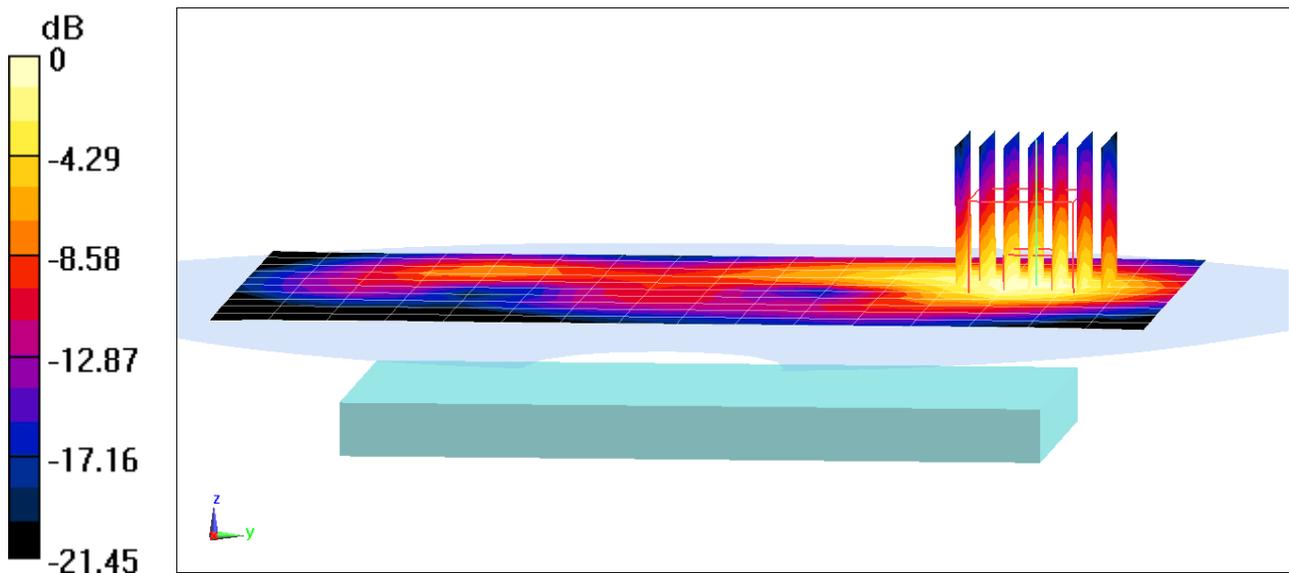

0 dB = 0.228 W/kg = -6.42 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMS260DL; Type: Portable Handset; Serial: 01869

Communication System: UID 0, _IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2412$ MHz; $\sigma = 1.984$ S/m; $\epsilon_r = 50.548$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 12-10-2018; Ambient Temp: 25.0°C; Tissue Temp: 23.2°C

Probe: ES3DV3 - SN3329; ConvF(4.5, 4.5, 4.5); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1403; Calibrated: 2/8/2018

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Mode: IEEE 802.11b, 22 MHz Bandwidth,
Body SAR, Ch 01, 1 Mbps, Top Edge**


Area Scan (10x11x1): Measurement grid: dx=5mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.243 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.853 W/kg

SAR(1 g) = 0.414 W/kg

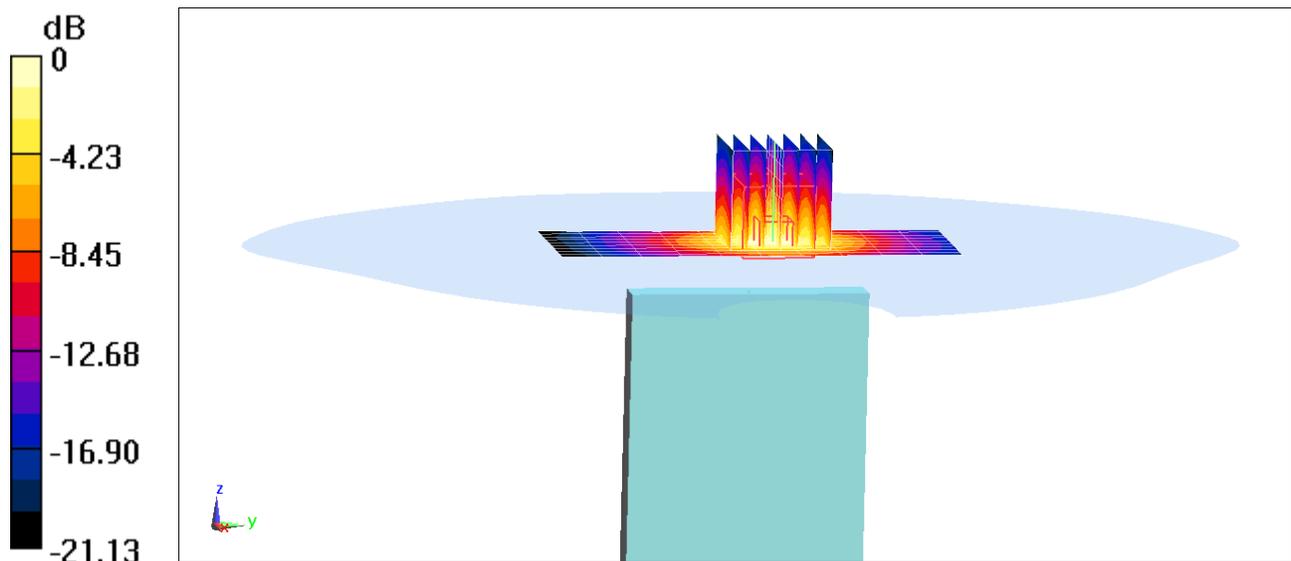

APPENDIX B: SYSTEM VERIFICATION

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1057

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Head Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.874 \text{ S/m}$; $\epsilon_r = 41.268$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11-28-2018; Ambient Temp: 21.0°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7491; ConvF(10.48, 10.48, 10.48) @ 750 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 10/18/2018

Phantom: Twin-SAM V8.0_Left; Type: QD 000 P41 AA; Serial: 1935

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.49 W/kg

SAR(1 g) = 1.67 W/kg

Deviation(1 g) = 0.48%

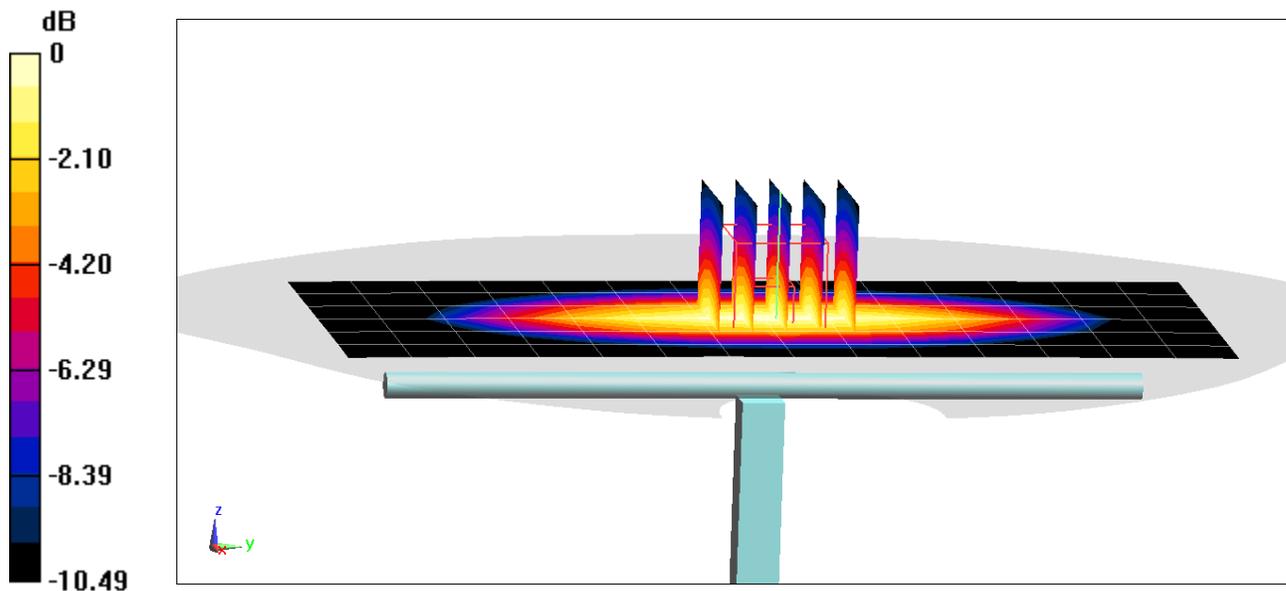

0 dB = 2.22 W/kg = 3.46 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1097

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Head Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.869 \text{ S/m}$; $\epsilon_r = 42.367$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 12-03-2018; Ambient Temp: 20.1°C; Tissue Temp: 18.5°C

Probe: EX3DV4 - SN7491; ConvF(10.48, 10.48, 10.48); Calibrated: 7/20/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 10/18/2018

Phantom: Twin-SAM V8.0_Left; Type: QD 000 P41 AA; Serial: 1935

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.33 W/kg

SAR(1 g) = 1.59 W/kg

Deviation(1 g) = -3.28%

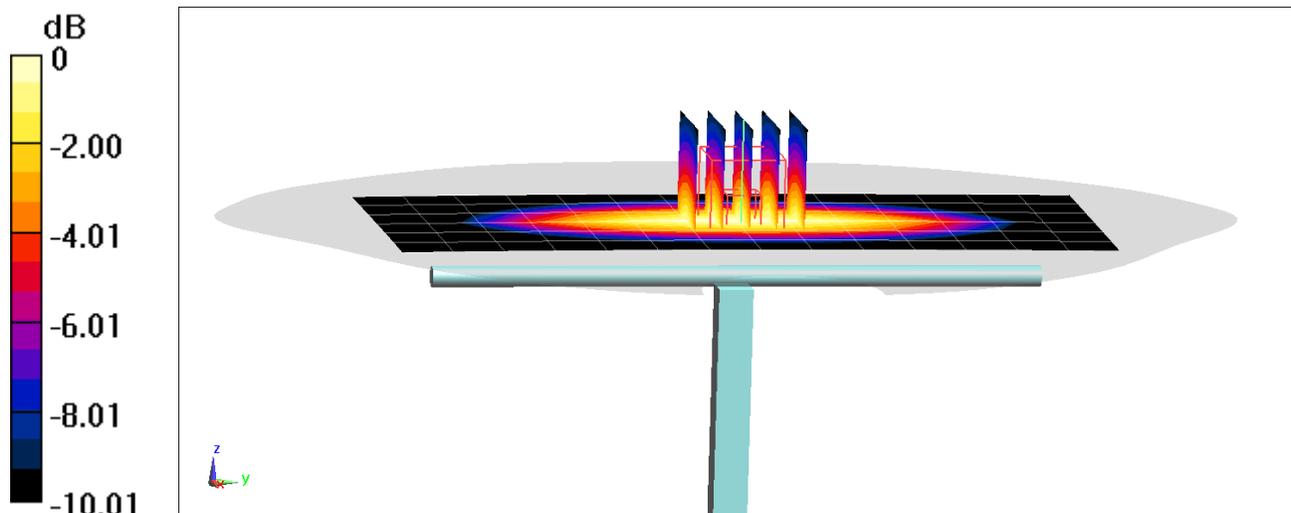

0 dB = 2.09 W/kg = 3.20 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 850 MHz; Type: D850V2; Serial: SN1009

Communication System: UID 0, CW; Frequency: 850 MHz; Duty Cycle: 1:1

Medium: 850 Head Medium parameters used:

$f = 850 \text{ MHz}$; $\sigma = 0.907 \text{ S/m}$; $\epsilon_r = 40.748$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11-28-2018; Ambient Temp: 20.4°C; Tissue Temp: 19.2°C

Probe: EX3DV4 - SN7416; ConvF(9.45, 9.45, 9.45); Calibrated: 7/20/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1402; Calibrated: 7/10/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CA; Serial: 1275

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

850 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 3.16 W/kg

SAR(1 g) = 2.02 W/kg

Deviation(1 g) = 1.00%

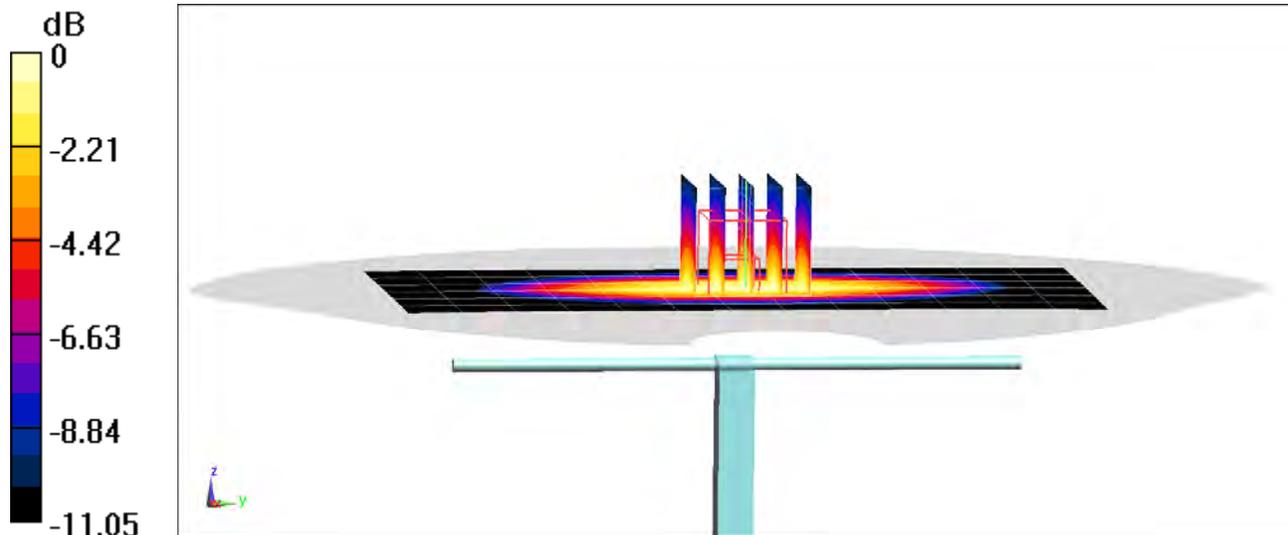

0 dB = 2.75 W/kg = 4.39 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1104

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.362 \text{ S/m}$; $\epsilon_r = 41.692$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 1-2-2019; Ambient Temp: 20.4°C; Tissue Temp: 20.0°C

Probe: ES3DV3 - SN3275; ConvF(5.52, 5.52, 5.52) @ 1750 MHz; Calibrated: 4/12/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn501; Calibrated: 4/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CD; Serial: 1736

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.17 W/kg

SAR(1 g) = 3.5 W/kg

Deviation(1 g) = -3.85%

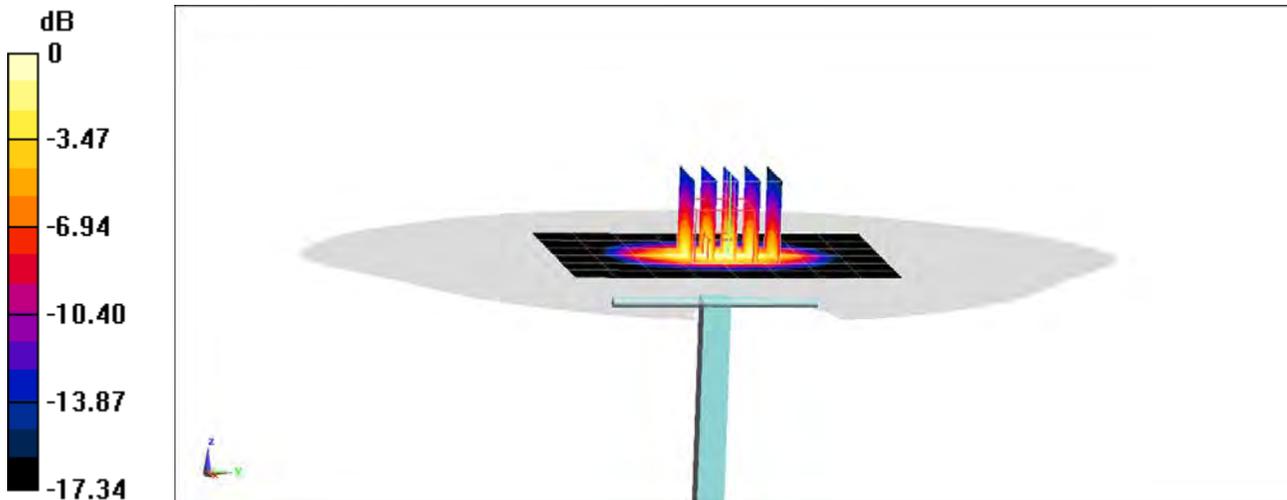

0 dB = 4.33 W/kg = 6.36 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d180

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.455 \text{ S/m}$; $\epsilon_r = 38.945$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-23-2018; Ambient Temp: 21.4°C; Tissue Temp: 19.6°C

Probe: ES3DV3 - SN3131; ConvF(5.27, 5.27, 5.27) @ 1900 MHz; Calibrated: 3/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn604; Calibrated: 3/7/2018

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.03 W/kg

SAR(1 g) = 3.8 W/kg

Deviation(1 g) = -3.06%

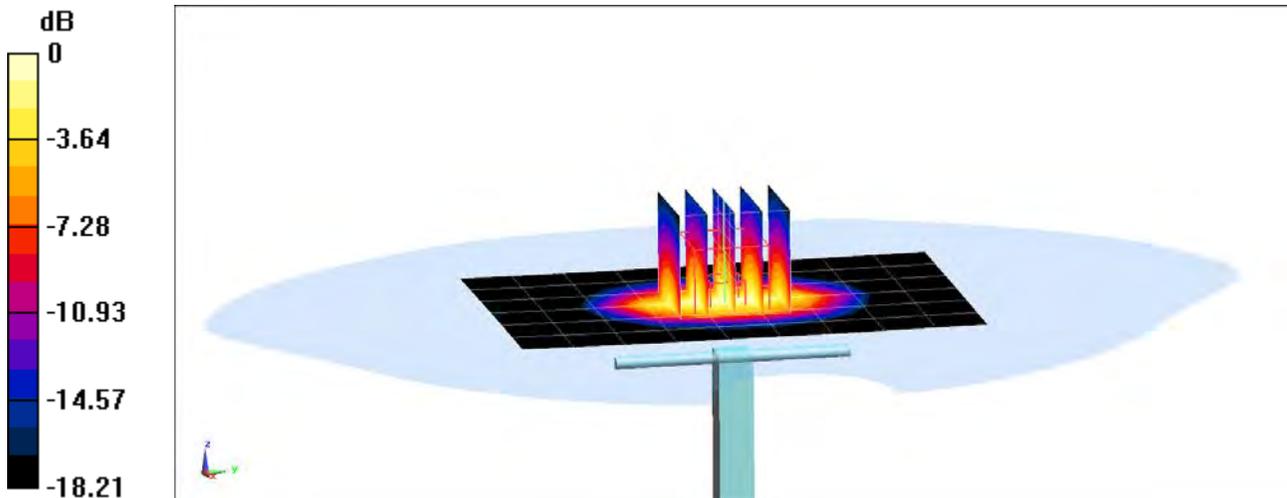

0 dB = 4.85 W/kg = 6.86 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d181

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.458 \text{ S/m}$; $\epsilon_r = 41.442$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-02-2019; Ambient Temp: 20.1°C; Tissue Temp: 20.0°C

Probe: ES3DV3 - SN3275; ConvF(5.33, 5.33, 5.33) @ 1900 MHz; Calibrated: 4/12/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn501; Calibrated: 4/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CD; Serial: 1736

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.75 W/kg

SAR(1 g) = 3.76 W/kg

Deviation(1 g) = -4.81%

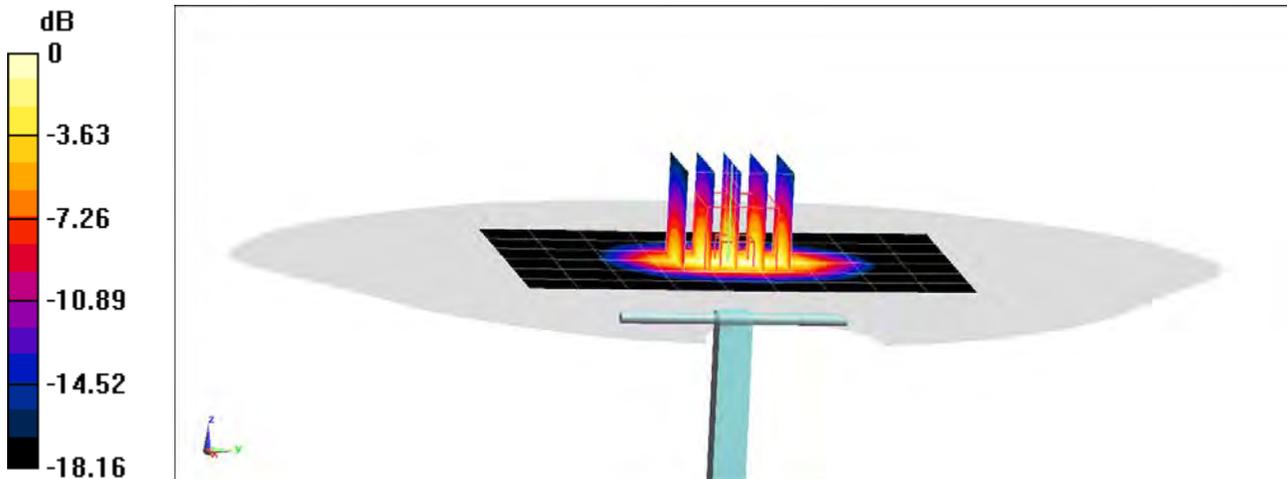

0 dB = 4.76 W/kg = 6.78 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 750

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2450$ MHz; $\sigma = 1.861$ S/m; $\epsilon_r = 39.328$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 12-5-2018; Ambient Temp: 21.9°C; Tissue Temp: 18.9°C

Probe: ES3DV3 - SN3275; ConvF(4.74, 4.74, 4.74) @ 2450 MHz; Calibrated: 4/12/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn501; Calibrated: 4/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CD; Serial: 1736

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.6 W/kg

SAR(1 g) = 5.66 W/kg

Deviation(1 g) = 6.19%

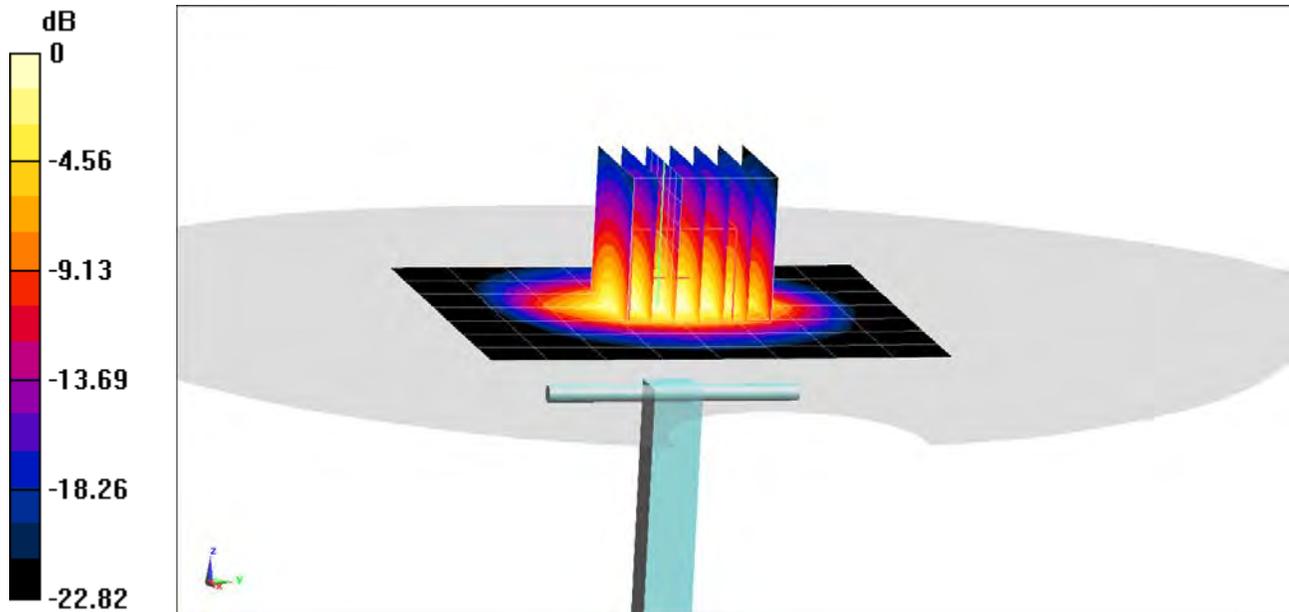

0 dB = 7.42 W/kg = 8.70 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 750

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.848 \text{ S/m}$; $\epsilon_r = 38.744$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 12-10-2018; Ambient Temp: 22.0°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7416; ConvF(7.25, 7.25, 7.25) @ 2450 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1402; Calibrated: 7/10/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CA; Serial: 1275

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.3 W/kg

SAR(1 g) = 5.36 W/kg

Deviation(1 g) = 0.56%

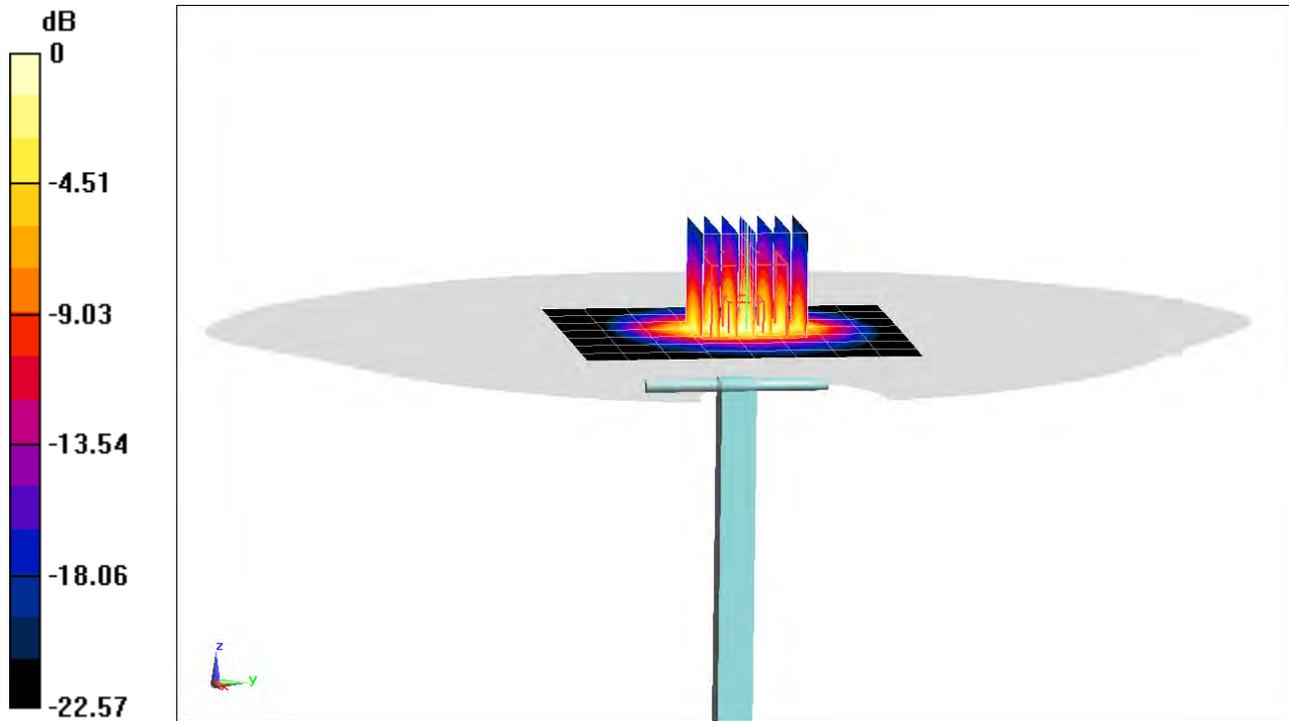

0 dB = 9.08 W/kg = 9.58 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1057

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 MHz Body Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.946 \text{ S/m}$; $\epsilon_r = 54.845$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11-29-2018; Ambient Temp: 20.5°C; Tissue Temp: 20.1°C

Probe: ES3DV3 - SN3329; ConvF(6.32, 6.32, 6.32) @ 750 MHz; Calibrated: 2/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1403; Calibrated: 2/8/2018

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.55 W/kg

SAR(1 g) = 1.76 W/kg

Deviation(1 g) = 0.11%

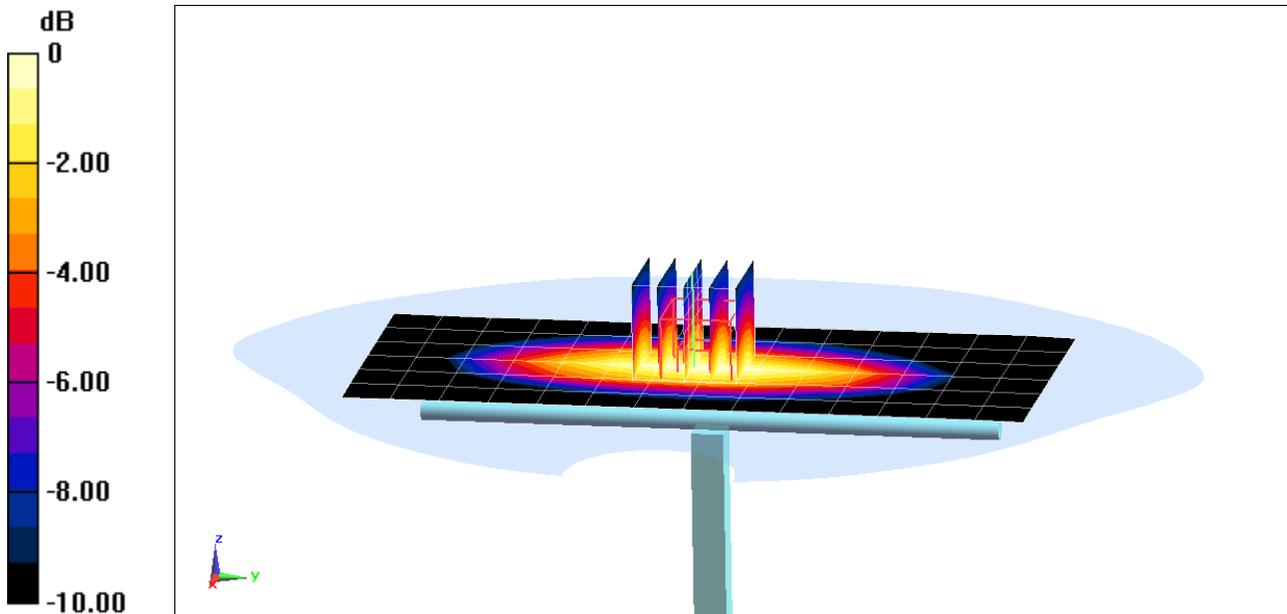

0 dB = 2.05 W/kg = 3.12 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 850 MHz; Type: D850V2; Serial: 1009

Communication System: UID 0, CW; Frequency: 850 MHz; Duty Cycle: 1:1

Medium: 850 Body Medium parameters used:

$f = 850 \text{ MHz}$; $\sigma = 1.016 \text{ S/m}$; $\epsilon_r = 53.219$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11-29-2018; Ambient Temp: 22.7°C; Tissue Temp: 20.5°C

Probe: ES3DV3 - SN3131; ConvF(6.14, 6.14, 6.14); Calibrated: 3/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn604; Calibrated: 3/7/2018

Phantom: SAM Sub; Type: QD 000 P40 CC; Serial: 1375

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

850 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 3.23 W/kg

SAR(1 g) = 2.14 W/kg

Deviation(1 g) = 8.30%

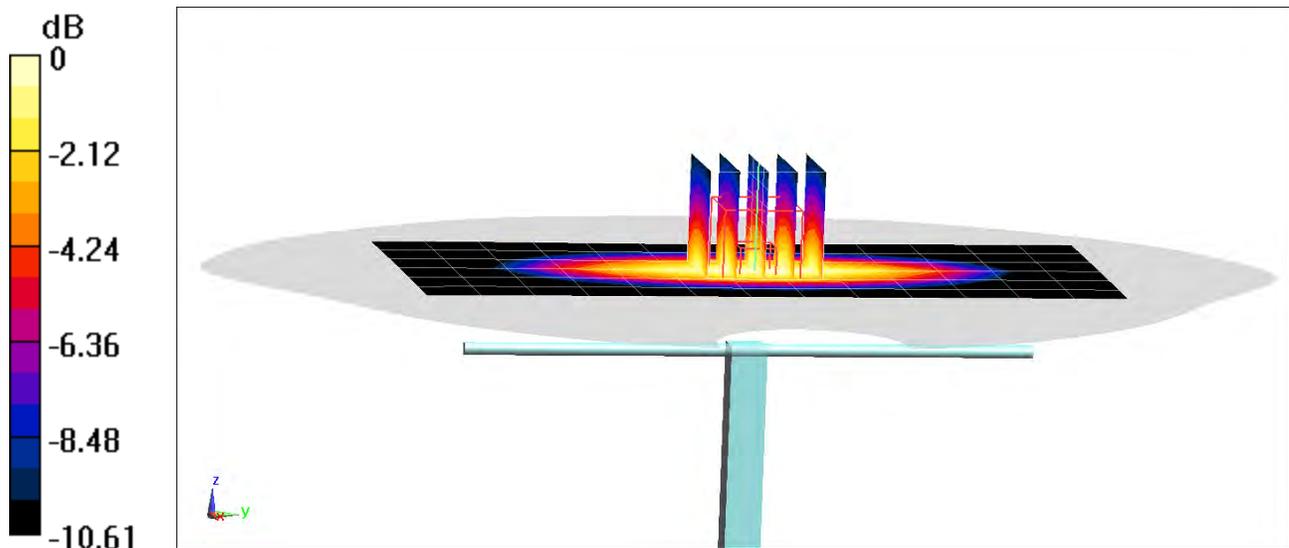

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 850 MHz; Type: D850V2; Serial: 1010

Communication System: UID 0, CW; Frequency: 850 MHz; Duty Cycle: 1:1

Medium: 850 Body Medium parameters used:

$f = 850 \text{ MHz}$; $\sigma = 0.97 \text{ S/m}$; $\epsilon_r = 52.658$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 12-5-2018; Ambient Temp: 20.1°C; Tissue Temp: 19.0°C

Probe: ES3DV3 - SN3329; ConvF(6.24, 6.24, 6.24); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1403; Calibrated: 2/8/2018

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

850 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.91 W/kg

SAR(1 g) = 1.97 W/kg

Deviation(1 g) = -3.43%

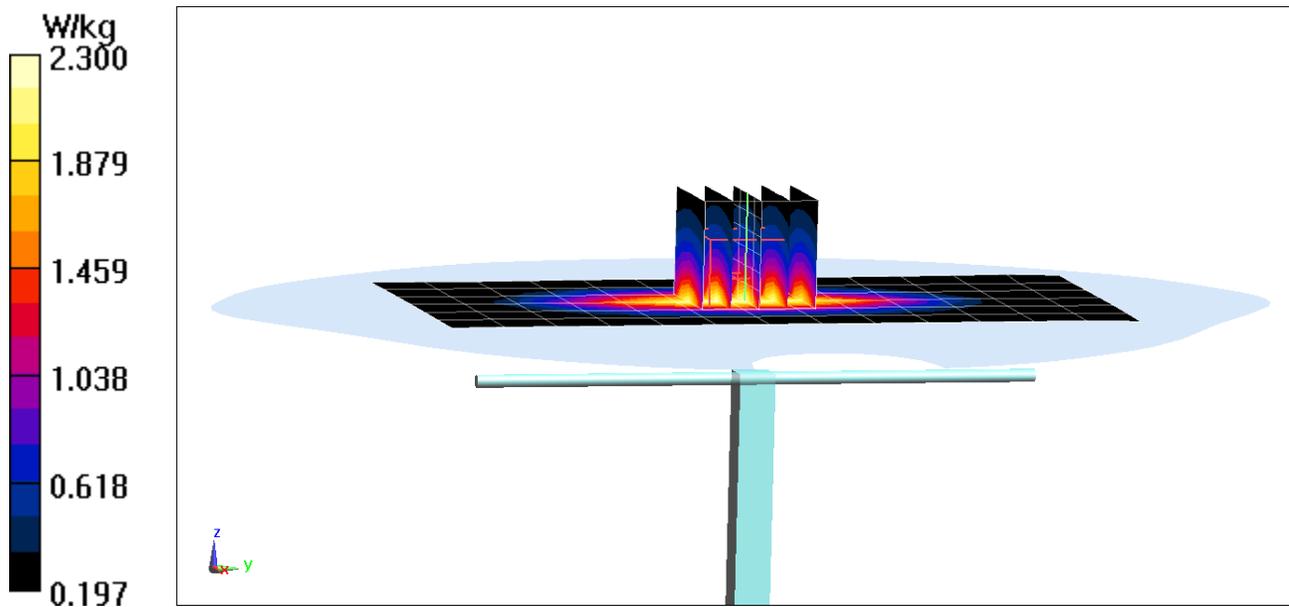

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1083

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.552 \text{ S/m}$; $\epsilon_r = 51.718$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-26-2018; Ambient Temp: 21.1°C; Tissue Temp: 20.1°C

Probe: ES3DV3 - SN3131; ConvF(5.03, 5.03, 5.03) @ 1750 MHz; Calibrated: 3/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn604; Calibrated: 3/7/2018

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.17 W/kg

SAR(1 g) = 4.01 W/kg

Deviation(1 g) = 7.51%

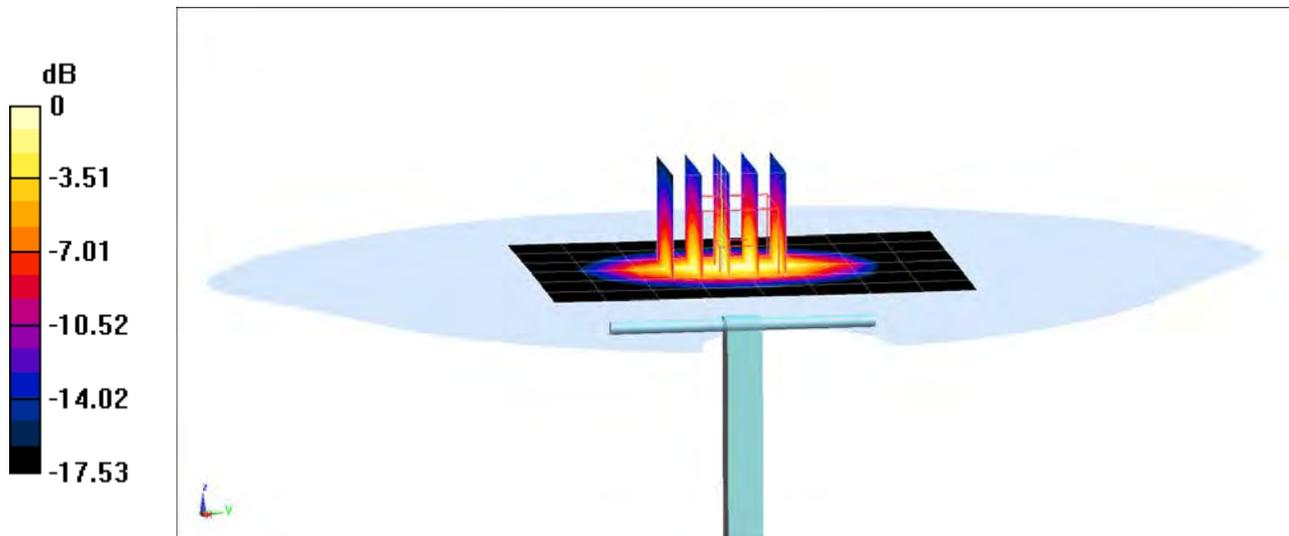

0 dB = 5.00 W/kg = 6.99 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1104

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.477 \text{ S/m}$; $\epsilon_r = 53.051$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-02-2019; Ambient Temp: 19.6°C; Tissue Temp: 18.7°C

Probe: ES3DV3 - SN3275; ConvF(5.08, 5.08, 5.08) @ 1750 MHz; Calibrated: 4/12/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn501; Calibrated: 4/12/2018

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CD; Serial: 1736

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.46 W/kg

SAR(1 g) = 3.72 W/kg

Deviation(1 g) = 1.64%

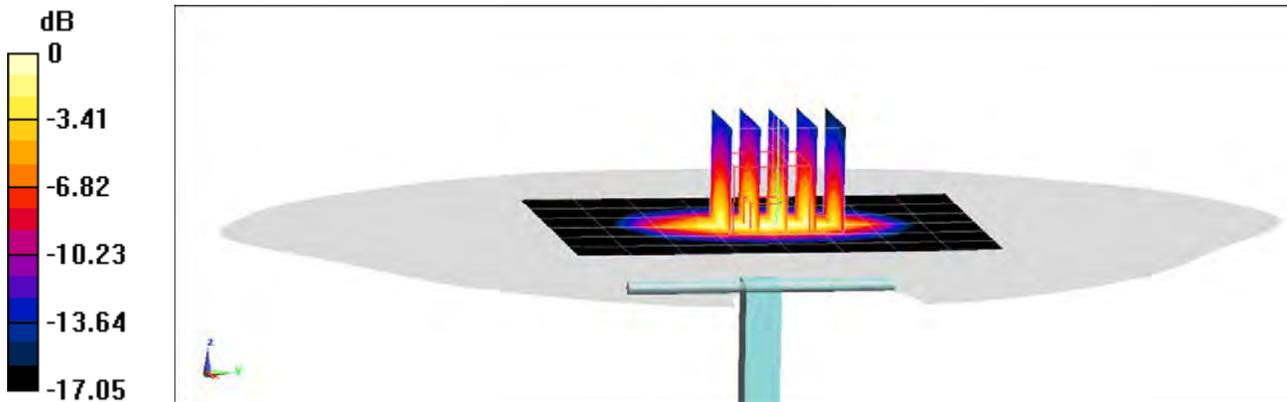

0 dB = 4.58 W/kg = 6.61 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1092

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.48 \text{ S/m}$; $\epsilon_r = 52.702$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-14-2019; Ambient Temp: 22.0°C; Tissue Temp: 20.6°C

Probe: ES3DV3 - SN3329; ConvF(5.04, 5.04, 5.04) @ 1750 MHz; Calibrated: 2/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1403; Calibrated: 2/8/2018

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.19 W/kg

SAR(1 g) = 3.61 W/kg

Deviation(1 g) = -0.82%

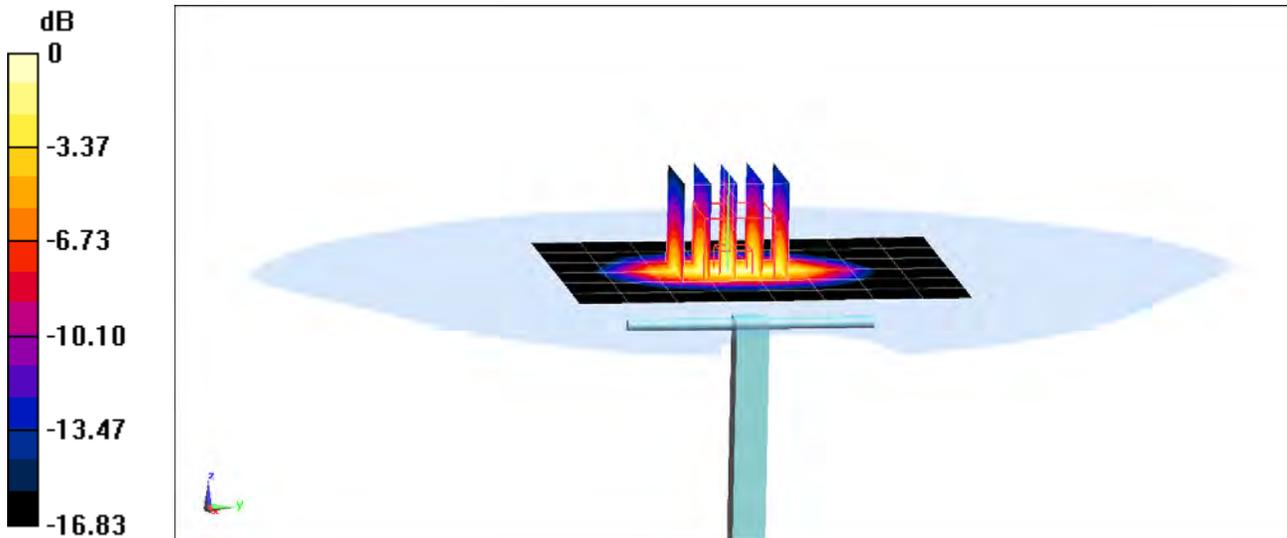

0 dB = 4.57 W/kg = 6.60 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: SN5d180

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.588 \text{ S/m}$; $\epsilon_r = 52.675$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-26-2018; Ambient Temp: 20.7°C; Tissue Temp: 19.2°C

Probe: ES3DV3 - SN3329; ConvF(4.84, 4.84, 4.84) @ 1900 MHz; Calibrated: 2/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1403; Calibrated: 2/8/2018

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.41 W/kg

SAR(1 g) = 4.22 W/kg

Deviation(1 g) = 6.84%

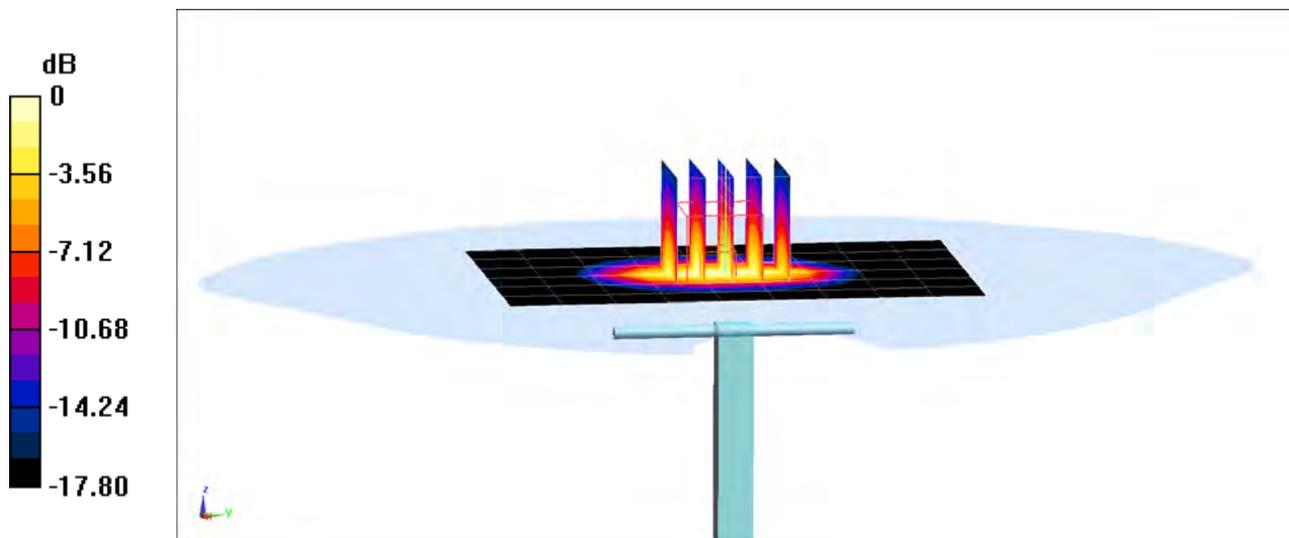

0 dB = 5.30 W/kg = 7.24 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d181

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900$ MHz; $\sigma = 1.586$ S/m; $\epsilon_r = 52.463$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-14-2019; Ambient Temp: 23.0°C; Tissue Temp: 21.0°C

Probe: ES3DV3 - SN3329; ConvF(4.84, 4.84, 4.84); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1403; Calibrated: 2/8/2018

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.74 W/kg

SAR(1 g) = 3.81 W/kg

Deviation(1 g) = -3.54%

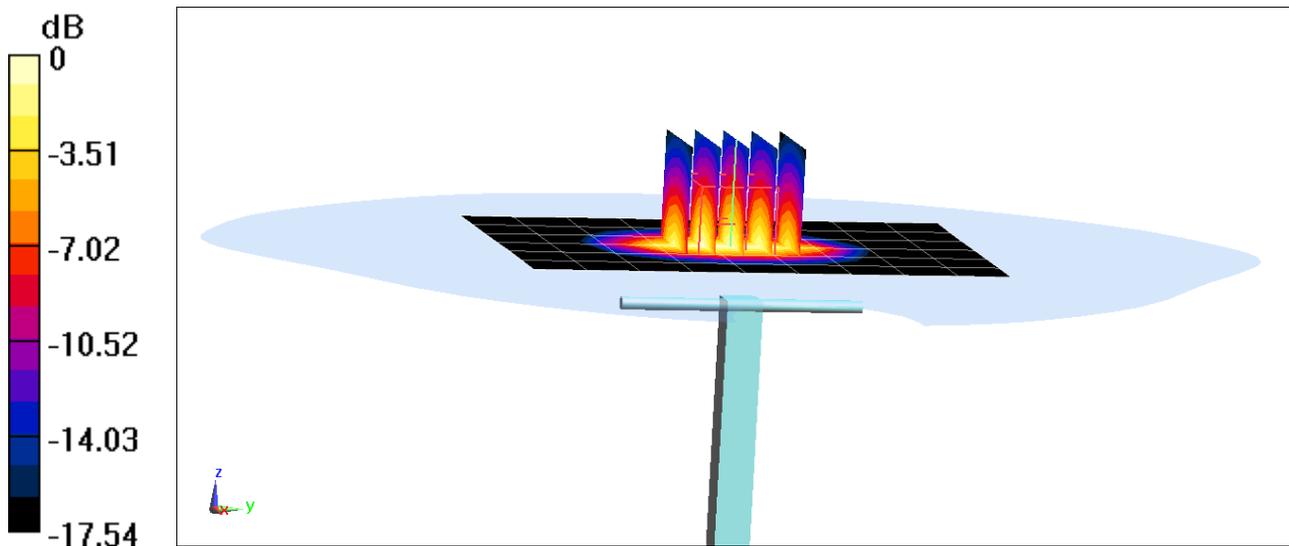

0 dB = 4.83 W/kg = 6.84 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 750

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450$ MHz; $\sigma = 2.011$ S/m; $\epsilon_r = 50.514$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 12-05-2018; Ambient Temp: 20.5°C; Tissue Temp: 19.0°C

Probe: ES3DV3 - SN3329; ConvF(4.5, 4.5, 4.5) @ 2450 MHz; Calibrated: 2/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1403; Calibrated: 2/8/2018

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.7 W/kg

SAR(1 g) = 5.38 W/kg

Deviation(1 g) = 5.08%

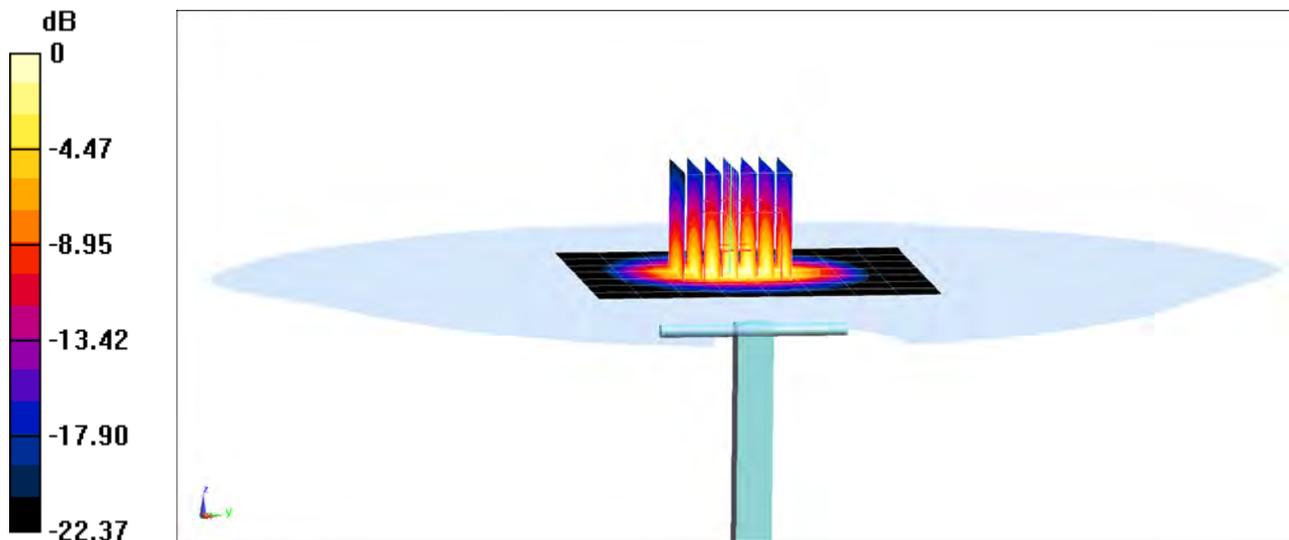

0 dB = 7.12 W/kg = 8.52 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 945

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450$ MHz; $\sigma = 2.017$ S/m; $\epsilon_r = 50.493$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 12-10-2018; Ambient Temp: 25.0°C; Tissue Temp: 23.2°C

Probe: ES3DV3 - SN3329; ConvF(4.5, 4.5, 4.5) @ 2450 MHz; Calibrated: 2/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1403; Calibrated: 2/8/2018

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.1 W/kg

SAR(1 g) = 5.17 W/kg

Deviation(1 g) = 4.66%

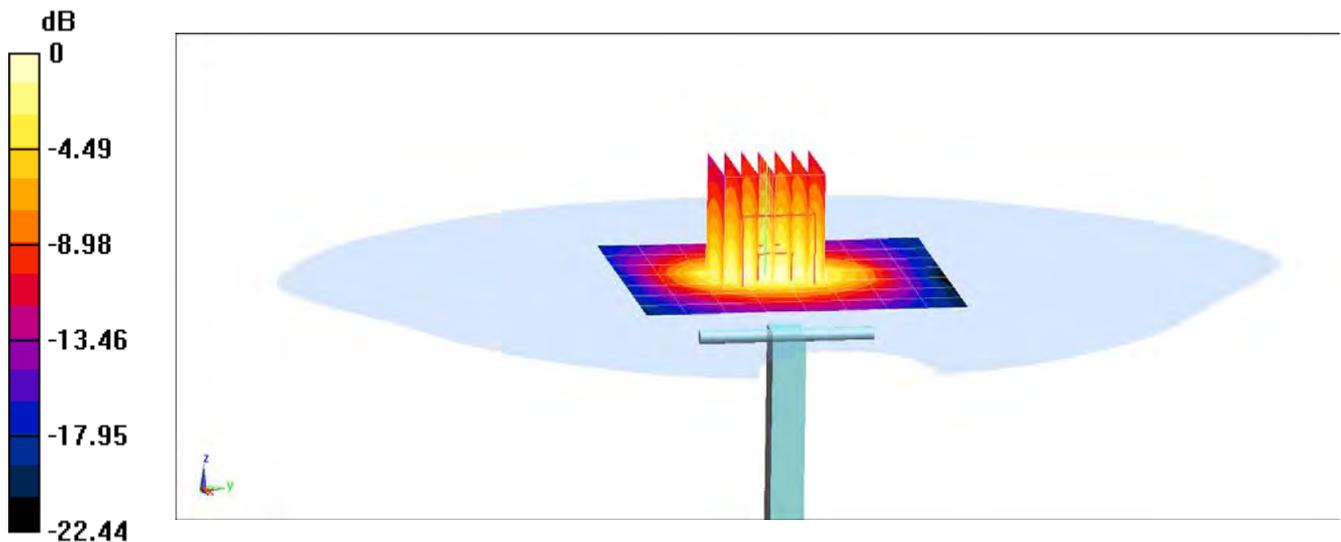

0 dB = 6.71 W/kg = 8.27 dBW/kg

APPENDIX C: PROBE CALIBRATION



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D750V3-1057_Jun17**

CALIBRATION CERTIFICATE

Object **D750V3 - SN:1057**

Calibration procedure(s) **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **June 13, 2017**

*BNW
8/3/2017
SC ✓
6/1/2018*

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	31-May-17 (No. EX3-7349_May17)	May-18
DAE4	SN: 601	28-Mar-17 (No. DAE4-601_Mar17)	Mar-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (In house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (In house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (In house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (In house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (In house check Oct-16)	In house check: Oct-17

Calibrated by: **Name** Johannes Kurikka **Function** Laboratory Technician

Approved by: **Name** Kalja Pokovic **Technical Manager**

Signature

Issued: June 15, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	41.2 \pm 6 %	0.91 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.12 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.31 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.39 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	54.8 \pm 6 %	0.97 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.22 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.79 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.46 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.79 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$55.9 \Omega + 0.1 j\Omega$
Return Loss	- 25.0 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$51.2 \Omega - 2.3 j\Omega$
Return Loss	- 32.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.035 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 08, 2011

DASY5 Validation Report for Head TSL

Date: 13.06.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1057

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.49, 10.49, 10.49); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.79 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.29 W/kg

SAR(1 g) = 2.12 W/kg; SAR(10 g) = 1.37 W/kg

Maximum value of SAR (measured) = 2.88 W/kg

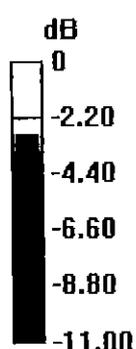


0 dB = 2.88 W/kg = 4.59 dBW/kg

Impedance Measurement Plot for Head TSL

13 Jun 2017 12:28:02

[CH1] S11 1 U FS 1: 55.930 Ω 0.0645 Ω 13.677 μH 750.000 000 MHz

*
De1
CA

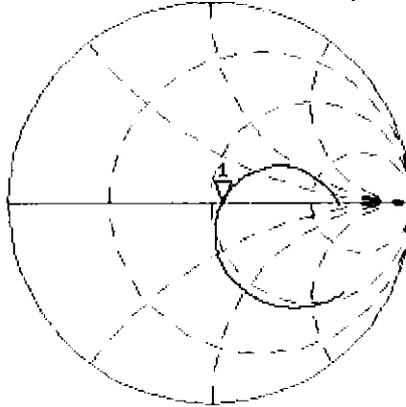

Avg
16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-25.037 dB 750.000 000 MHz

CA

Avg
16

H1d

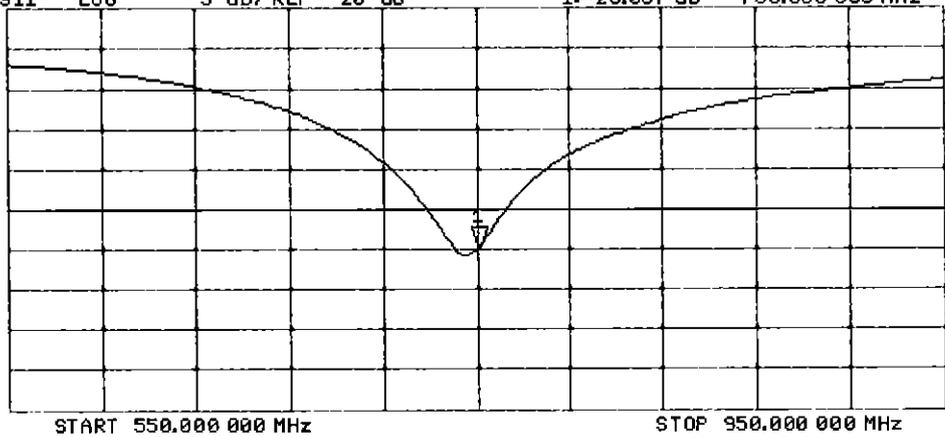

DASY5 Validation Report for Body TSL

Date: 12.06.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1057

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.97$ S/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.35, 10.35, 10.35); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.76 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.34 W/kg

SAR(1 g) = 2.22 W/kg; SAR(10 g) = 1.46 W/kg

Maximum value of SAR (measured) = 2.93 W/kg

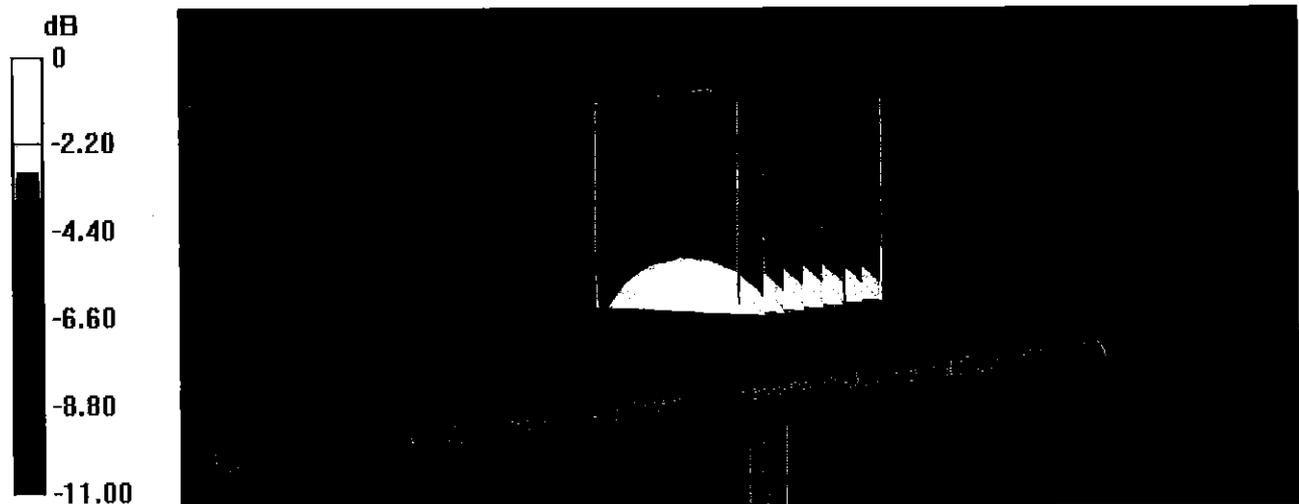


0 dB = 2.93 W/kg = 4.67 dBW/kg

Impedance Measurement Plot for Body TSL

12 Jun 2017 12:57:06


CH1 S11 1 U FS 1: 51.168 Ω -2.2578 Ω 93.988 pF 750.000 000 MHz

*
De1
CA
Avg
16
H1 d

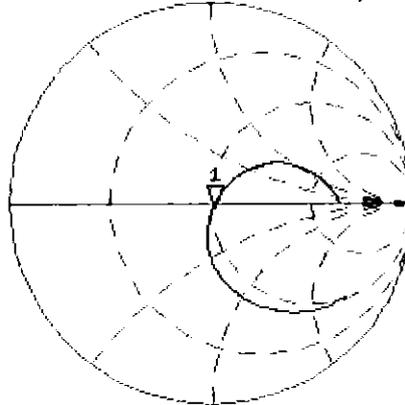

CH2 S11 LOG 5 dB/REF -20 dB 1: -31.993 dB 750.000 000 MHz

CA
Avg
16
H1 d

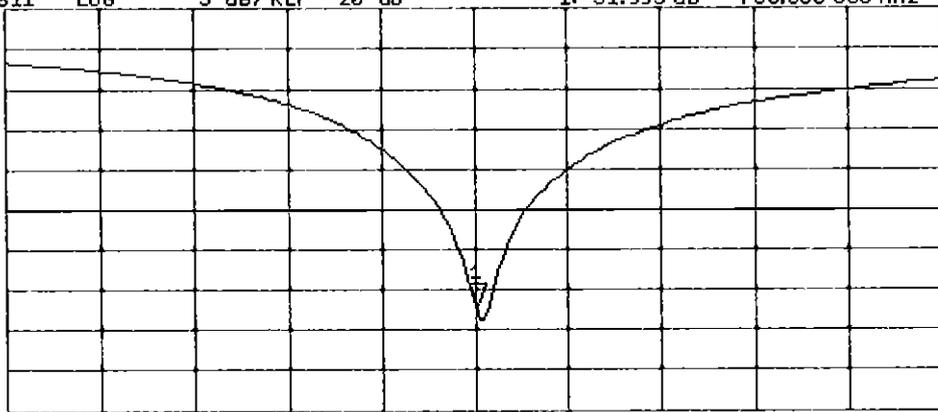

START 550.000 000 MHz

STOP 950.000 000 MHz

Certification of Calibration

Object: D750V3 – SN: 1057

Calibration procedure(s): Procedure for Calibration Extension for SAR Dipoles.

Extended Calibration date: June 01, 2018

Description: SAR Validation Dipole at 750 MHz.

Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8753ES	S-Parameter Network Analyzer	9/14/2017	Annual	9/14/2018	US39170118
Agilent	N5182A	MXG Vector Signal Generator	3/19/2018	Annual	3/19/2019	US46240505
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	343972
Anritsu	ML2496A	Power Meter	10/9/2017	Annual	10/9/2018	1138001
Anritsu	MA2411B	Pulse Power Sensor	11/15/2017	Annual	11/15/2018	1339007
Anritsu	MA2411B	Pulse Power Sensor	11/22/2017	Annual	11/22/2018	1339008
Control Company	4040	Temperature / Humidity Monitor	2/28/2018	Biennial	2/28/2020	150761911
Control Company	4352	Ultra Long Stem Thermometer	2/14/2017	Biennial	2/14/2019	170112507
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/1/2017	Annual	6/1/2018	MY53401181
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
SPEAG	DAKS-3.5	Portable DAK	9/5/2017	Annual	9/5/2018	1045
SPEAG	EX3DV4	SAR Probe	1/26/2018	Annual	1/26/2019	7490
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/26/2018	Annual	1/26/2019	1532

Measurement Uncertainty = $\pm 23\%$ (k=2)

	Name	Function	Signature
Calibrated By:	Sangmin Cha	Biomedical Engineer II	
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	

DIPOLE CALIBRATION EXTENSION

Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:



1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.

The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:



Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) W/kg @ 23.0 dBm	Measured Head SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Head (10g) W/kg @ 23.0 dBm	Measured Head SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
6/13/2018	6/1/2018	1.035	1.662	1.66	-0.12%	1.078	1.09	1.11%	55.9	51.8	4.1	0.1	-3.9	4	-25	-27.7	-10.80%	PASS

Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) W/kg @ 23.0 dBm	Measured Body SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 23.0 dBm	Measured Body SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
6/13/2018	6/1/2018	1.035	1.758	1.67	-5.01%	1.158	1.11	-4.15%	51.2	48.4	2.8	-2.3	-6.2	3.9	-32	-27.2	15.00%	PASS

Impedance & Return-Loss Measurement Plot for Head TSL

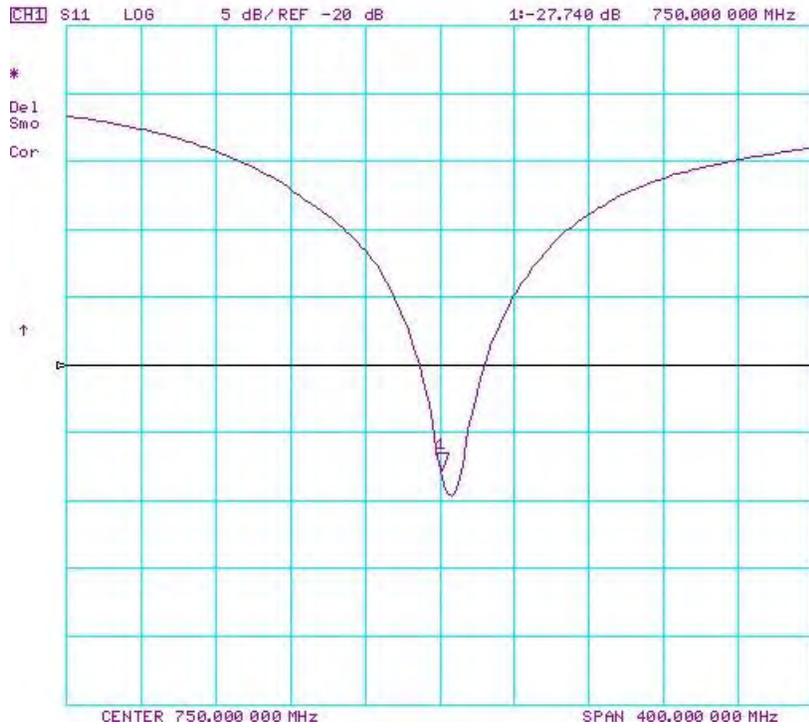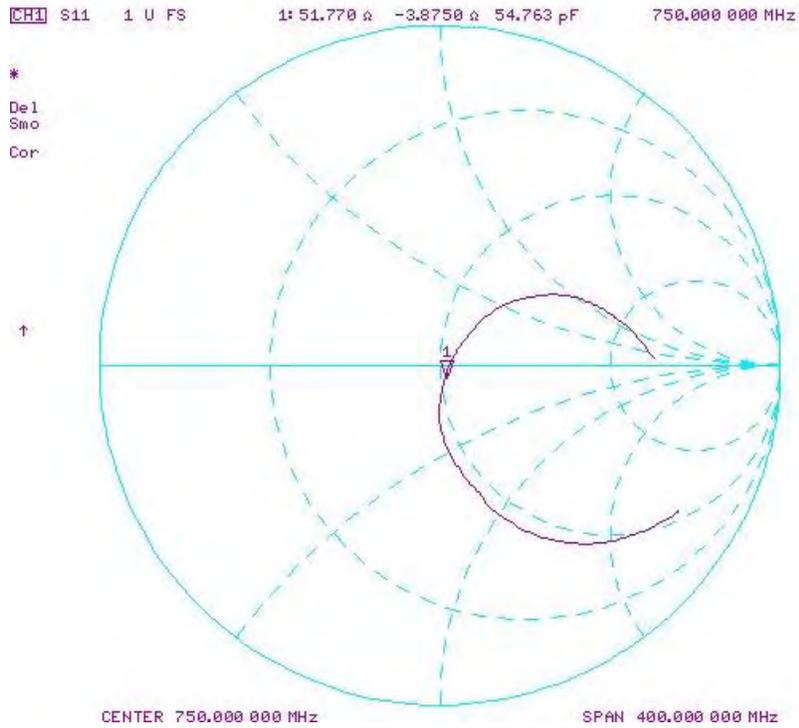

Impedance & Return-Loss Measurement Plot for Body TSL

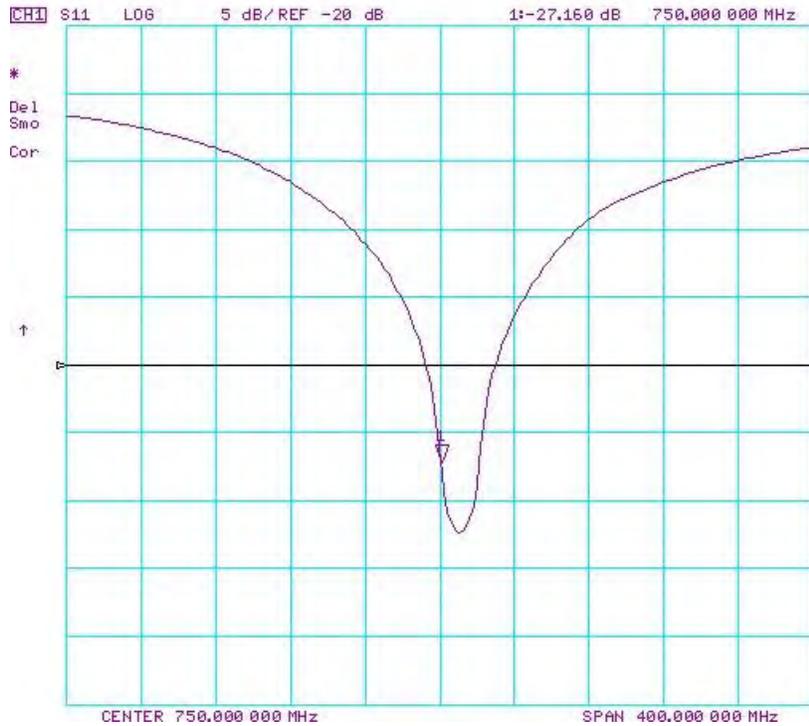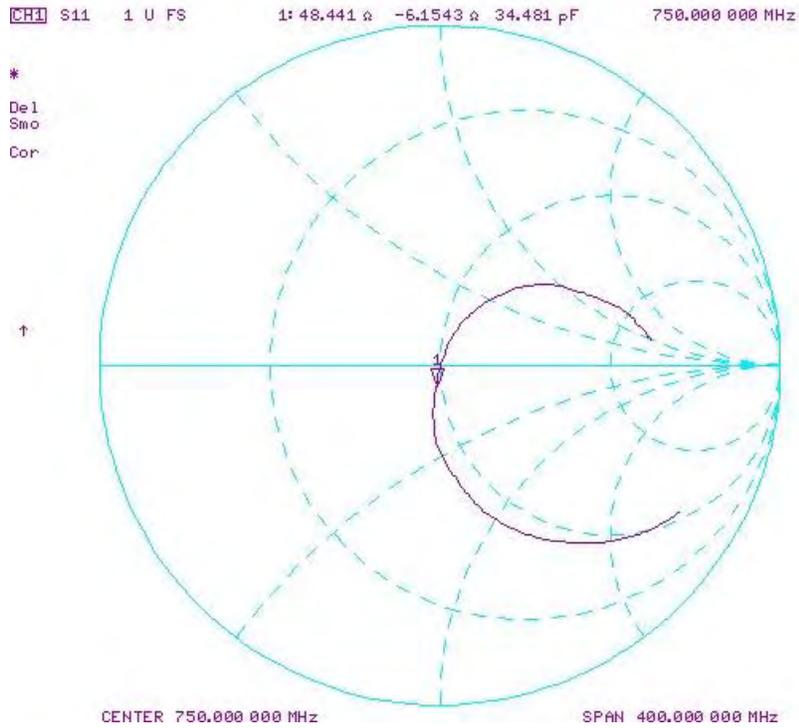



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client: **PC Test**

Certificate No.: **D750V3-1097_Sep17**

CALIBRATION CERTIFICATE

Object: **D750V3 - SN:1097**

Calibration procedure(s): **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

SCV
10/03/2017

Calibration date: **September 08, 2017**

SCV
9/8/2018

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	31-May-17 (No. EX3-7349_May17)	May-18
DAE4	SN: 601	28-Mar-17 (No. DAE4-601_Mar17)	Mar-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by: **Claudio Leubler** Name: Claudio Leubler Function: Laboratory Technician

Signature: *[Handwritten Signature]*

Approved by: **Katja Pokovic** Name: Katja Pokovic Function: Technical Manager

Signature: *[Handwritten Signature]*

Issued: September 8, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	41.2 \pm 6 %	0.90 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.08 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.22 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.36 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.39 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	55.5 \pm 6 %	0.96 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.14 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.56 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.42 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.68 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	54.4 Ω - 0.6 j Ω
Return Loss	- 27.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	50.0 Ω - 3.6 j Ω
Return Loss	- 28.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.034 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 05, 2013

DASY5 Validation Report for Head TSL

Date: 08.09.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1097

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.49, 10.49, 10.49); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.59 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.19 W/kg

SAR(1 g) = 2.08 W/kg; SAR(10 g) = 1.36 W/kg

Maximum value of SAR (measured) = 2.80 W/kg

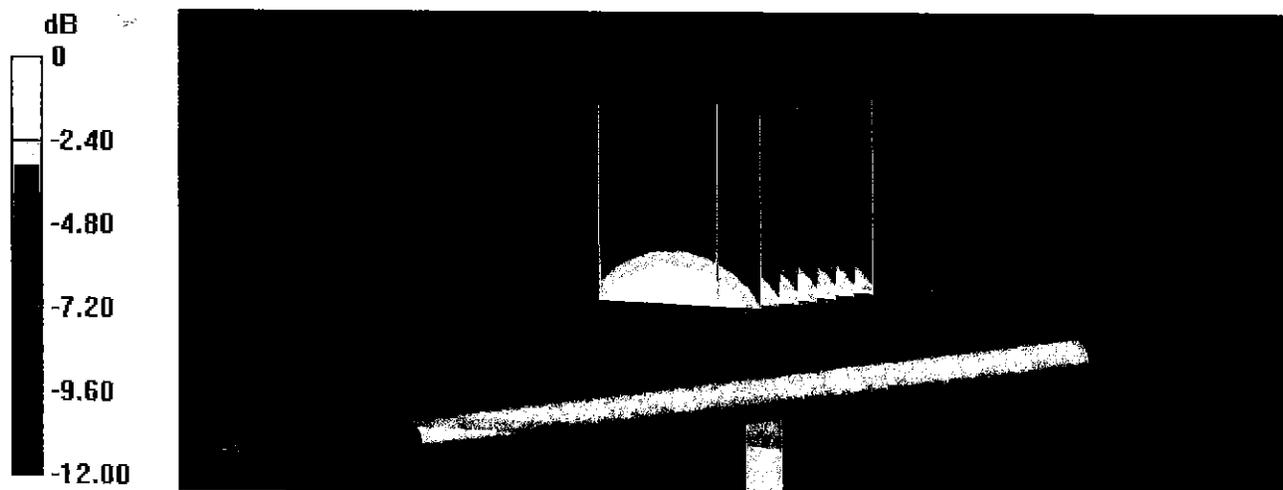


Impedance Measurement Plot for Head TSL

8 Sep 2017 13:09:24

CH1 S11 1 U FS 1: 54.383 Ω -552.73 m Ω 383.92 pF 750.000 000 MHz

*
De1
CA

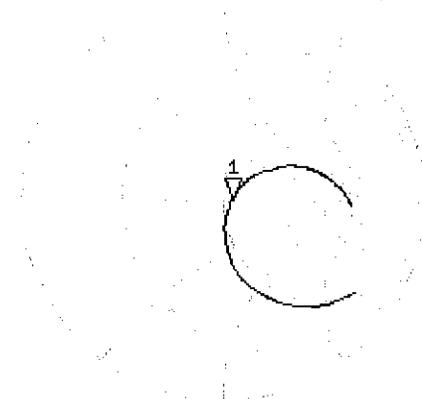

Avg
16

H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -27.463 dB 750.000 000 MHz

CA

Avg
16

H1d

START 550.000 000 MHz

STOP 950.000 000 MHz

DASY5 Validation Report for Body TSL

Date: 08.09.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1097

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.35, 10.35, 10.35); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.96 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 3.16 W/kg

SAR(1 g) = 2.14 W/kg; SAR(10 g) = 1.42 W/kg

Maximum value of SAR (measured) = 2.81 W/kg

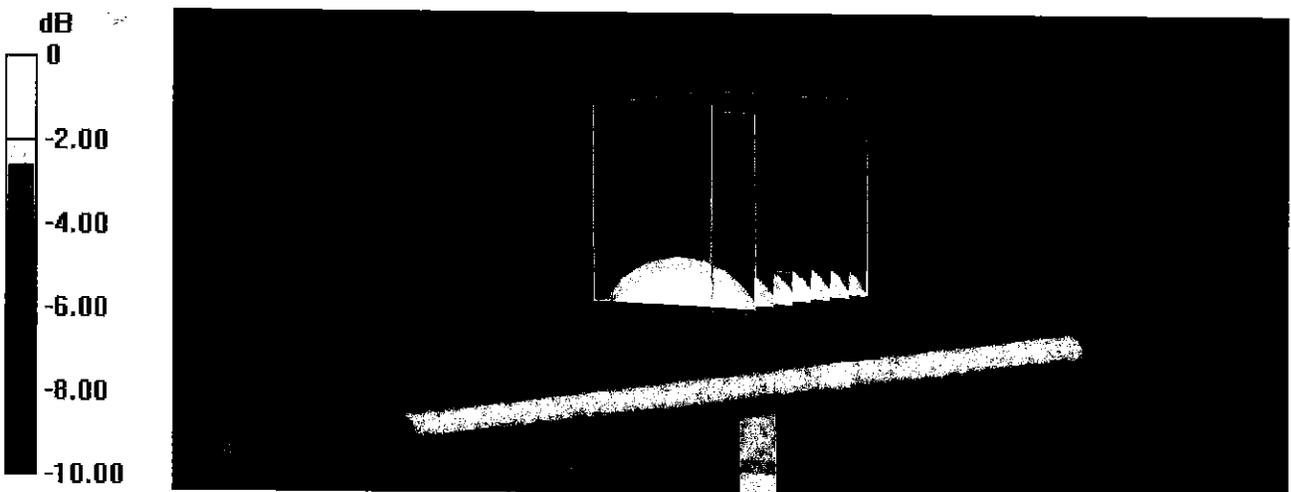

0 dB = 2.81 W/kg = 4.49 dBW/kg

Impedance Measurement Plot for Body TSL

8 Sep 2017 13:08:43
[CH1] S11 1 U FS 1: 49.951 Ω -3.6172 Ω 58.666 pF 750.000 000 MHz

*
De1
CA

Avg
15

H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-28.833 dB 750.000 000 MHz



CA

Avg
15

H1d

START 550.000 000 MHz

STOP 950.000 000 MHz

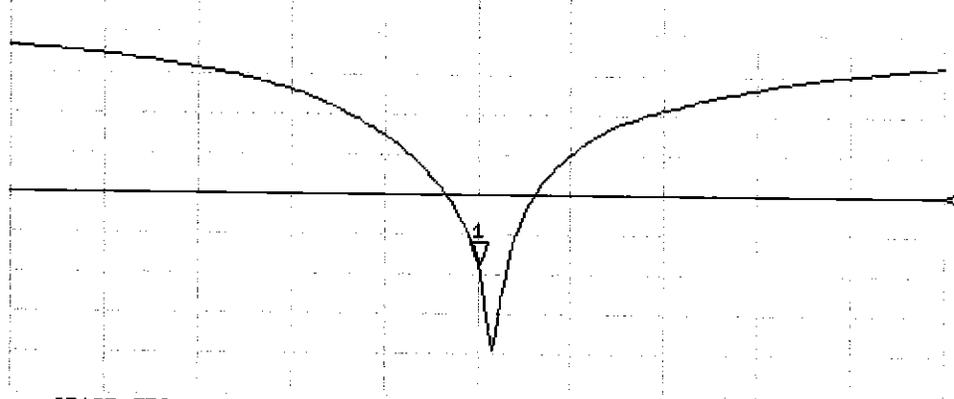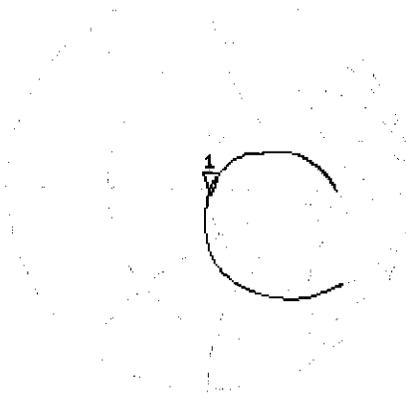

Certification of Calibration

Object: D750V3 – SN: 1097

Calibration procedure(s): Procedure for Calibration Extension for SAR Dipoles.

Extended Calibration date: September 08, 2018

Description: SAR Validation Dipole at 750 MHz.

Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8753ES	S-Parameter Network Analyzer	9/14/2017	Annual	9/14/2018	US39170118
Agilent	N5182A	MXG Vector Signal Generator	3/19/2018	Annual	3/19/2019	US46240505
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	343972
Anritsu	ML2496A	Power Meter	10/9/2017	Annual	10/9/2018	1138001
Anritsu	MA2411B	Pulse Power Sensor	11/15/2017	Annual	11/15/2018	1339007
Anritsu	MA2411B	Pulse Power Sensor	11/22/2017	Annual	11/22/2018	1339008
Control Company	4040	Temperature / Humidity Monitor	2/28/2018	Biennial	2/28/2020	150761911
Control Company	4352	Ultra Long Stem Thermometer	2/14/2017	Biennial	2/14/2019	170112507
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/4/2018	Annual	6/4/2019	MY53401181
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/15/2018	Annual	5/15/2019	1070
SPEAG	ES3DV3	SAR Probe	9/18/2017	Annual	9/18/2018	3287
SPEAG	DAE4	Data Acquisition Electronics	1/26/2018	Annual	1/26/2019	1533
SPEAG	EX3DV4	SAR Probe	7/20/2018	Annual	7/20/2019	7416
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/18/2018	Annual	1/18/2019	793

Measurement Uncertainty = $\pm 23\%$ (k=2)

	Name	Function	Signature
Calibrated By:	Sangmin Cha	Team Lead Engineer	
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	

DIPOLE CALIBRATION EXTENSION

Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:



1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.

The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:



Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) W/kg @ 23.0 dBm	Measured Head SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Head (10g) W/kg @ 23.0 dBm	Measured Head SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
9/8/2017	9/8/2018	1.034	1.644	1.7	3.41%	1.078	1.12	3.90%	54.4	54.1	0.3	-0.6	-0.6	0	-27.5	-25.5	7.30%	PASS

Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) W/kg @ 23.0 dBm	Measured Body SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 23.0 dBm	Measured Body SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
9/8/2017	9/8/2018	1.034	1.712	1.78	3.97%	1.136	1.17	2.99%	50	49.6	0.4	-3.6	-3.1	0.5	-28.8	-30.3	-5.20%	PASS

Impedance & Return-Loss Measurement Plot for Head TSL

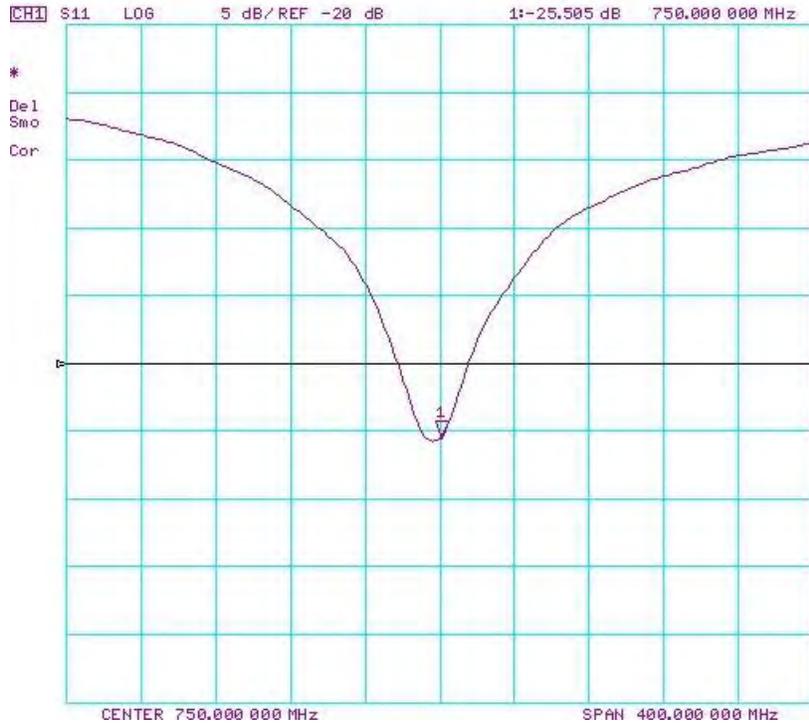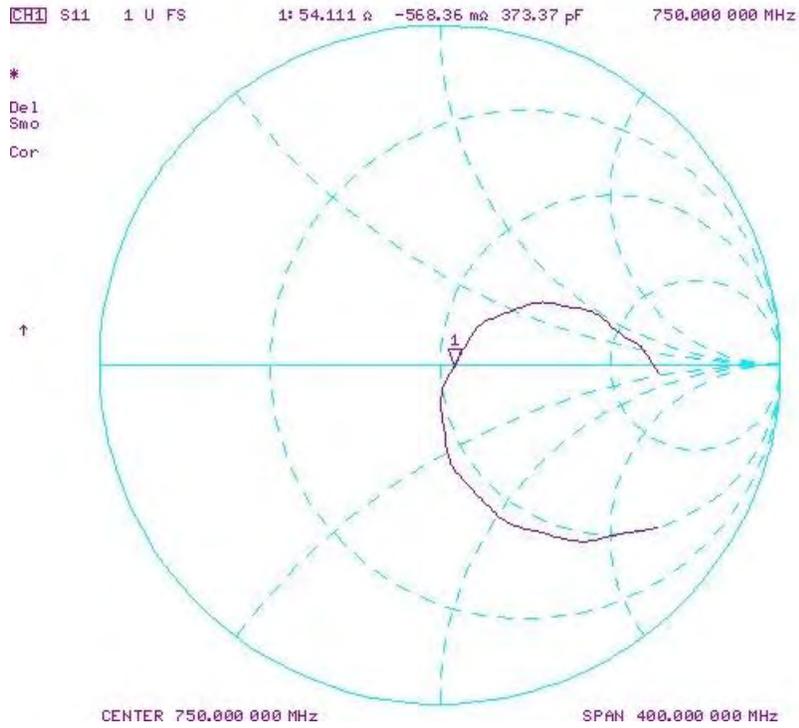

Impedance & Return-Loss Measurement Plot for Body TSL

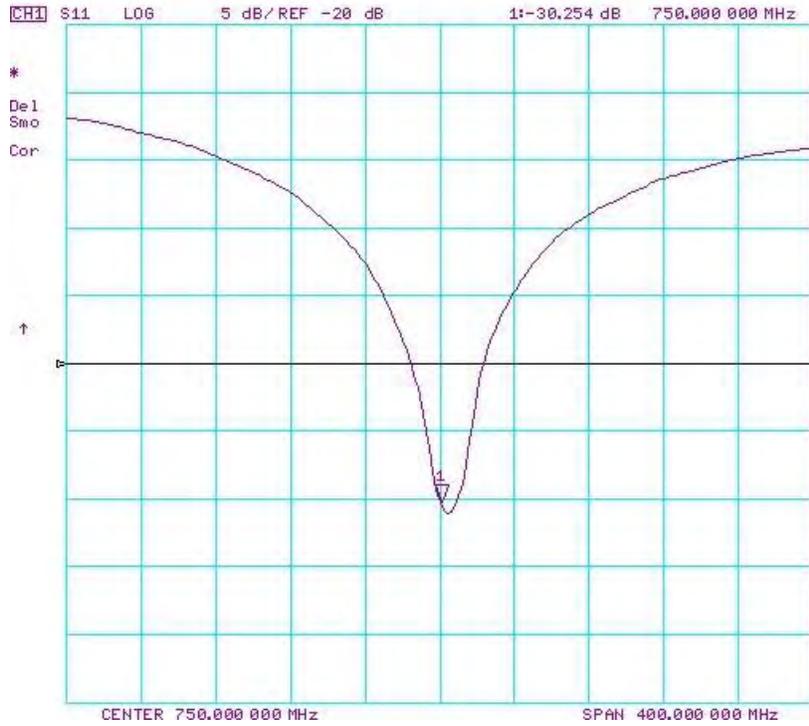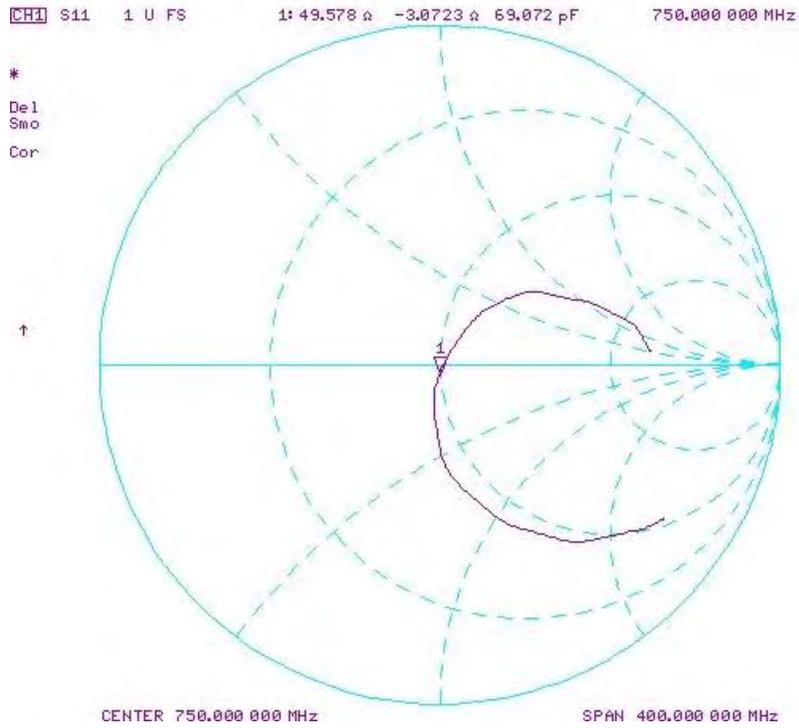



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D850V2-1009_Aug17**

CALIBRATION CERTIFICATE

Object **D850V2 - SN:1009**

Calibration procedure(s) **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **August 16, 2017**

*8/27/17
PNV
8/21/18
SCV*

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	31-May-17 (No. EX3-7349_May17)	May-18
DAE4	SN: 601	28-Mar-17 (No. DAE4-601_Mar17)	Mar-18

Secondary Standards	ID #	Check Date (In house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (In house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (In house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (In house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (In house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8763E	SN: US37390585	18-Oct-01 (In house check Oct-16)	In house check: Oct-17

Calibrated by: **Johannes Kurikka** Name: Johannes Kurikka Function: Laboratory Technician

Approved by: **Katja Pokovic** Name: Katja Pokovic Function: Technical Manager

Signature
Johannes Kurikka
Katja Pokovic

Issued: August 17, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	850 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.92 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.9 ± 6 %	0.94 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.56 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	10.0 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.66 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.54 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.99 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54.7 ± 6 %	1.02 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.53 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.88 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.65 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.48 W/kg ± 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.5 Ω - 2.5 j Ω
Return Loss	- 29.2 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.5 Ω - 7.3 j Ω
Return Loss	- 22.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.438 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	September 04, 2012

DASY5 Validation Report for Head TSL

Date: 16.08.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 850 MHz; Type: D850V2; Serial: D850V2 - SN:1009

Communication System: UID 0 - CW; Frequency: 850 MHz

Medium parameters used: $f = 850$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.93, 9.93, 9.93); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 63.35 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.86 W/kg

SAR(1 g) = 2.56 W/kg; SAR(10 g) = 1.66 W/kg

Maximum value of SAR (measured) = 3.43 W/kg

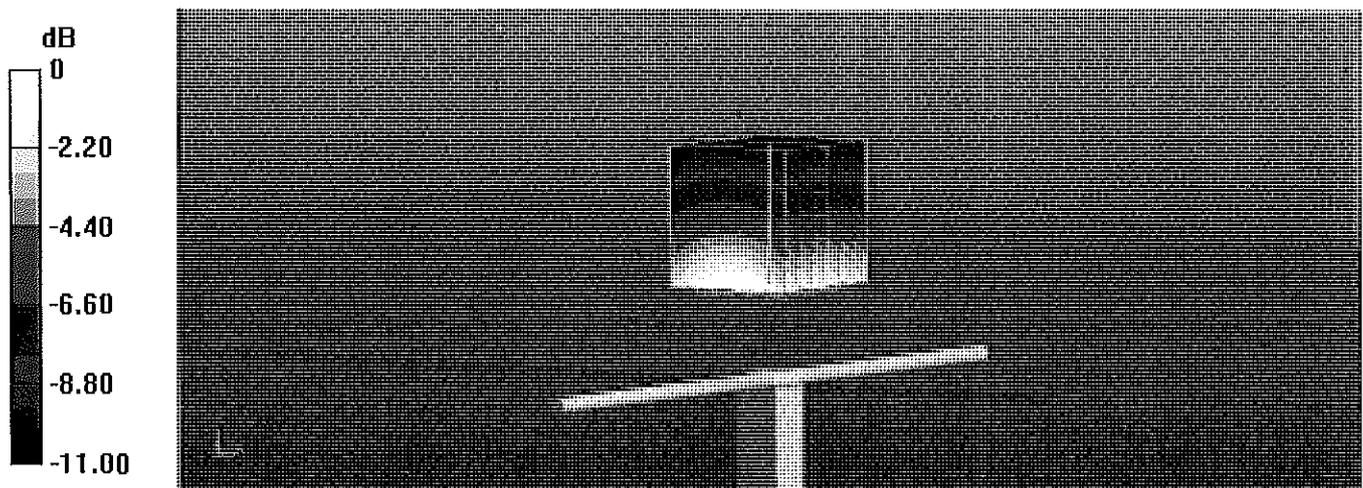


0 dB = 3.43 W/kg = 5.35 dBW/kg

Impedance Measurement Plot for Head TSL


16 Aug 2017 13:01:08
[CH1] S11 1 U FS 1: 52.521 Ω -2.4941 Ω 75.072 pF 850.000 000 MHz

*
Del
CA
Avg
16
H1d

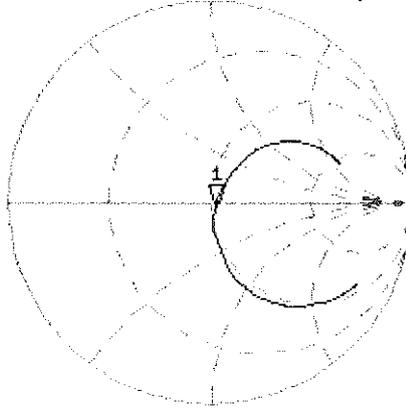

CH2 S11 LOG 5 dB/REF -20 dB 1: -29.218 dB 850.000 000 MHz

CA
Avg
16
H1d

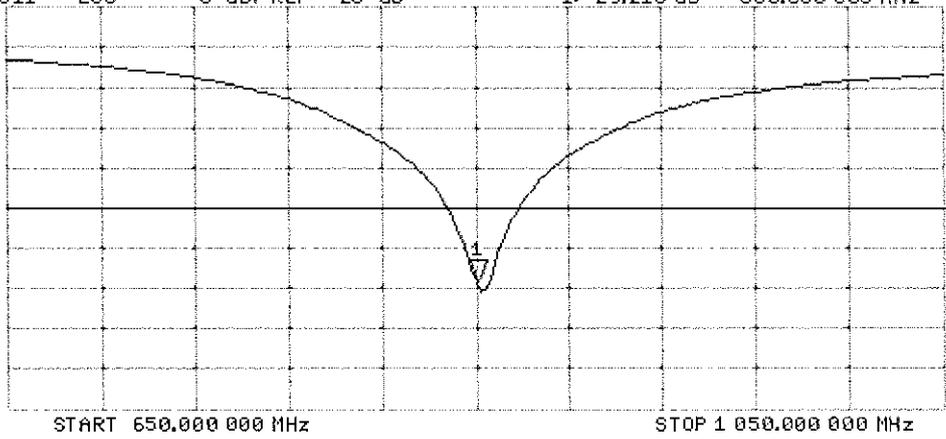

DASY5 Validation Report for Body TSL

Date: 16.08.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 850 MHz; Type: D850V2; Serial: D850V2 - SN:1009

Communication System: UID 0 - CW; Frequency: 850 MHz

Medium parameters used: $f = 850$ MHz; $\sigma = 1.02$ S/m; $\epsilon_r = 54.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.11, 10.11, 10.11); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 60.51 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.80 W/kg

SAR(1 g) = 2.53 W/kg; SAR(10 g) = 1.65 W/kg

Maximum value of SAR (measured) = 3.35 W/kg

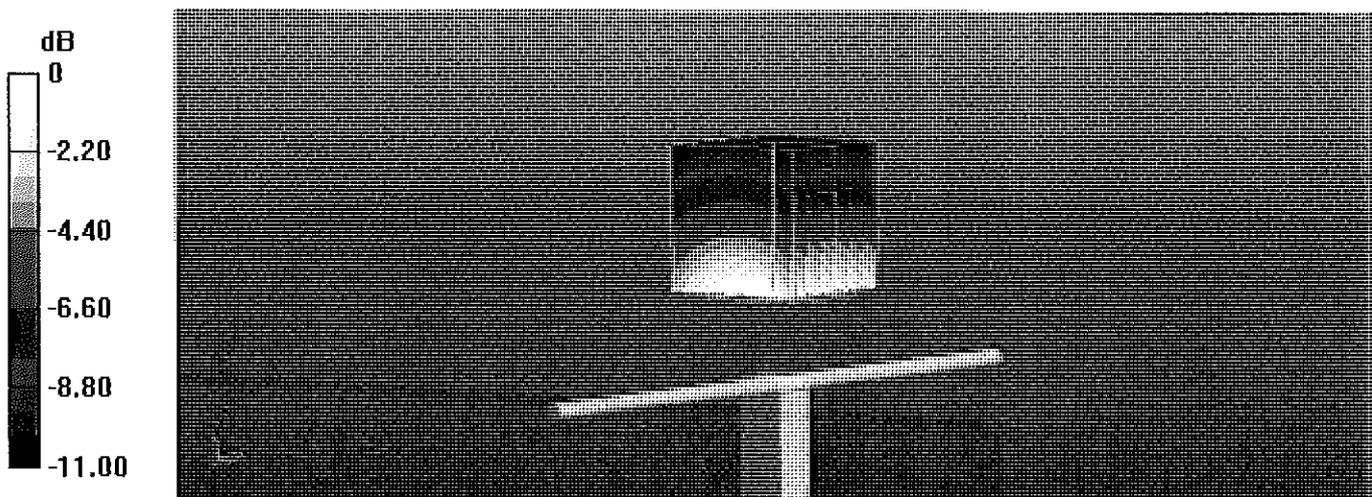


0 dB = 3.35 W/kg = 5.25 dBW/kg

Impedance Measurement Plot for Body TSL

16 Aug 2017 15:51:01
[CH1] S11 1 U FS 1: 47.543 Ω -7.3145 Ω 25.599 pF 850.000 000 MHz

*
Del
CA

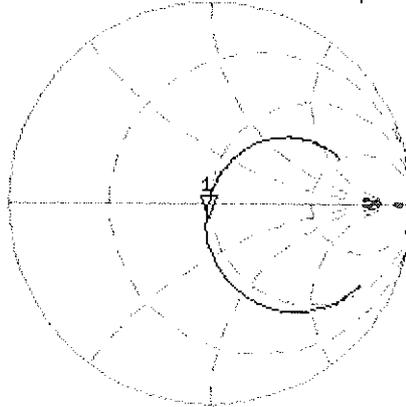

Avg
16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-22.060 dB 850.000 000 MHz

CA

Avg
16

H1d

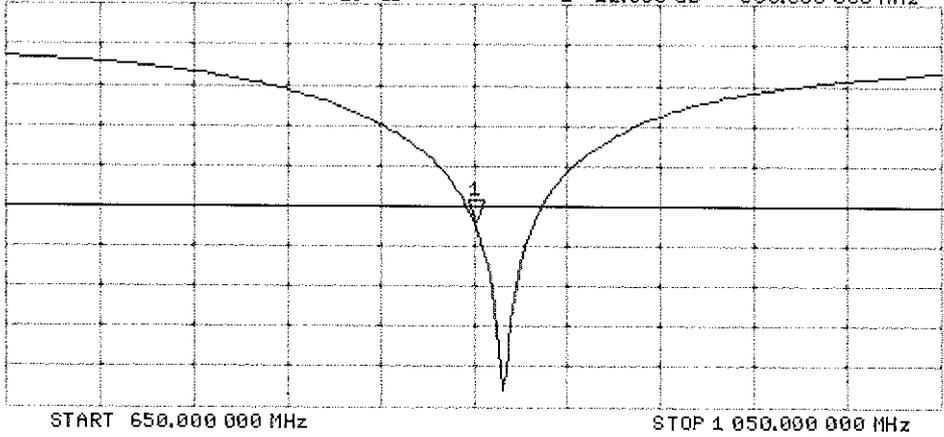

Certification of Calibration

Object: D850V2 – SN: 1009

Calibration procedure(s): Procedure for Calibration Extension for SAR Dipoles.


Extended Calibration date: August 02, 2018

Description: SAR Validation Dipole at 850 MHz.

Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8753ES	S-Parameter Network Analyzer	9/14/2017	Annual	9/14/2018	US39170118
Agilent	N5182A	MXG Vector Signal Generator	3/19/2018	Annual	3/19/2019	US46240505
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	343972
Anritsu	ML2496A	Power Meter	10/9/2017	Annual	10/9/2018	1138001
Anritsu	MA2411B	Pulse Power Sensor	11/15/2017	Annual	11/15/2018	1339007
Anritsu	MA2411B	Pulse Power Sensor	11/22/2017	Annual	11/22/2018	1339008
Control Company	4040	Temperature / Humidity Monitor	2/28/2018	Biennial	2/28/2020	150761911
Control Company	4352	Ultra Long Stem Thermometer	2/14/2017	Biennial	2/14/2019	170112507
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/4/2018	Annual	6/4/2019	MY53401181
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
SPEAG	DAKS-3.5	Portable DAK	9/5/2017	Annual	9/5/2018	1045
SPEAG	E53DV3	SAR Probe	3/13/2018	Annual	3/13/2019	3131
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/7/2018	Annual	3/7/2019	604

Measurement Uncertainty = $\pm 23\%$ (k=2)

	Name	Function	Signature
Calibrated By:	Sangmin Cha	Biomedical Engineer II	
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	

DIPOLE CALIBRATION EXTENSION

Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:



1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.

The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:



Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) W/kg @ 23.0 dBm	Measured Head SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Head (10g) W/kg @ 23.0 dBm	Measured Head SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
8/16/2017	8/2/2018	1.438	2	1.83	-3.50%	1.308	1.25	-4.43%	52.5	51.9	0.6	-2.5	-1.6	0.9	-29.2	-29.6	-1.40%	PASS

Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) W/kg @ 23.0 dBm	Measured Body SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 23.0 dBm	Measured Body SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
8/16/2017	8/2/2018	1.438	1.976	2.07	4.76%	1.296	1.36	4.94%	47.5	46.7	0.8	-7.3	-3.7	3.6	-22.1	-26	-17.60%	PASS

Impedance & Return-Loss Measurement Plot for Head TSL

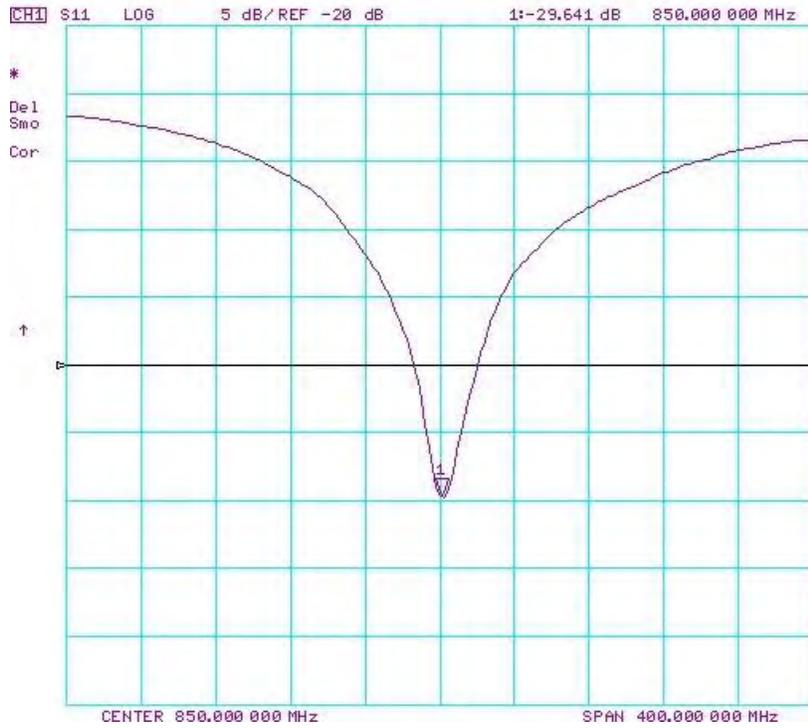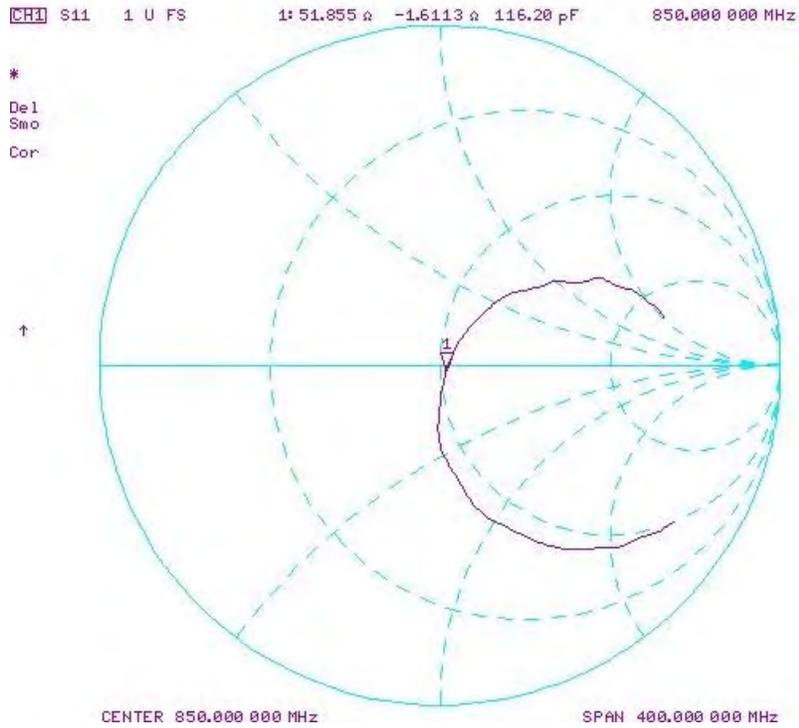

Impedance & Return-Loss Measurement Plot for Body TSL

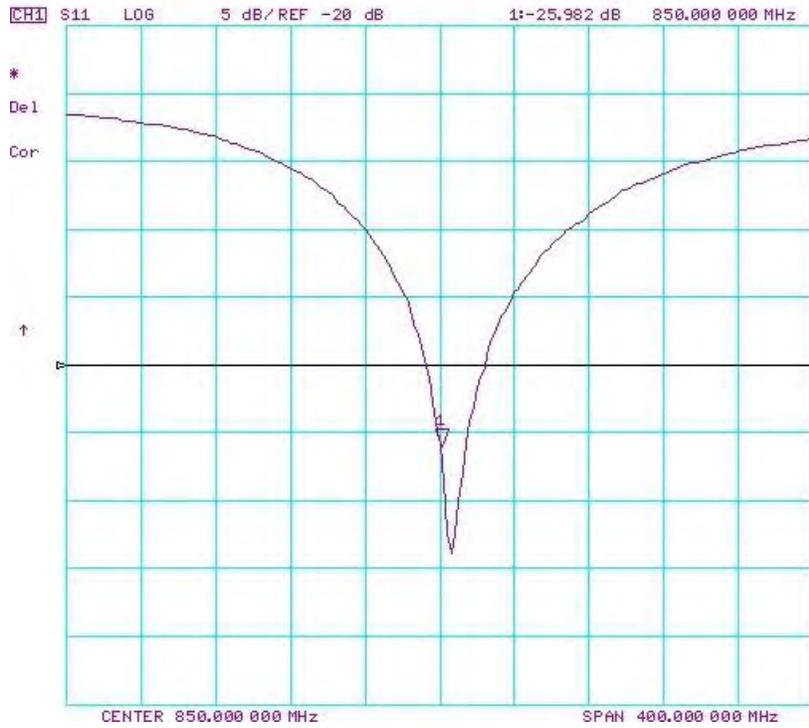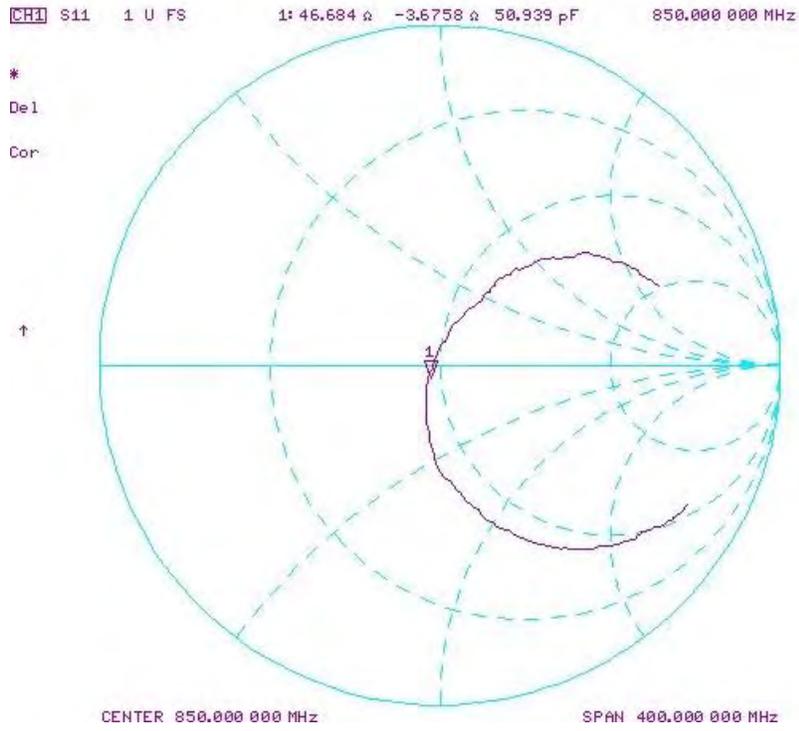



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client: **PC Test**

Certificate No: **D850V2-1010_Sep17**

CALIBRATION CERTIFICATE

Object: **D850V2 - SN:1010**

Calibration procedure(s): **QA-CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

*SCV
10/03/2017

SCV
9/9/2018*

Calibration date: **September 08, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02622)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	31-May-17 (No. EX3-7349_May17)	May-18
DAE4	SN: 601	28-Mar-17 (No. DAE4-601_Mar17)	Mar-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by: **Claudio Leubler** Name: Claudio Leubler Function: Laboratory Technician

Signature: *[Handwritten Signature]*

Approved by: **Katja Pakovic** Name: Katja Pakovic Function: Technical Manager

Signature: *[Handwritten Signature]*

Issued: September 8, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	850 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.92 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	40.9 \pm 6 %	0.94 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.53 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.93 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.63 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.42 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.99 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	55.3 \pm 6 %	0.99 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	---	---

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.55 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	10.2 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.67 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.68 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.2 Ω - 3.1 j Ω
Return Loss	- 30.2 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.6 Ω - 5.8 j Ω
Return Loss	- 23.2 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.432 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	September 04, 2012

DASY5 Validation Report for Head TSL

Date: 08.09.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 850 MHz; Type: D850V2; Serial: D850V2 - SN:1010

Communication System: UID 0 - CW; Frequency: 850 MHz

Medium parameters used: $f = 850$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.93, 9.93, 9.93); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 63.32 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.85 W/kg

SAR(1 g) = 2.53 W/kg; SAR(10 g) = 1.63 W/kg

Maximum value of SAR (measured) = 3.41 W/kg

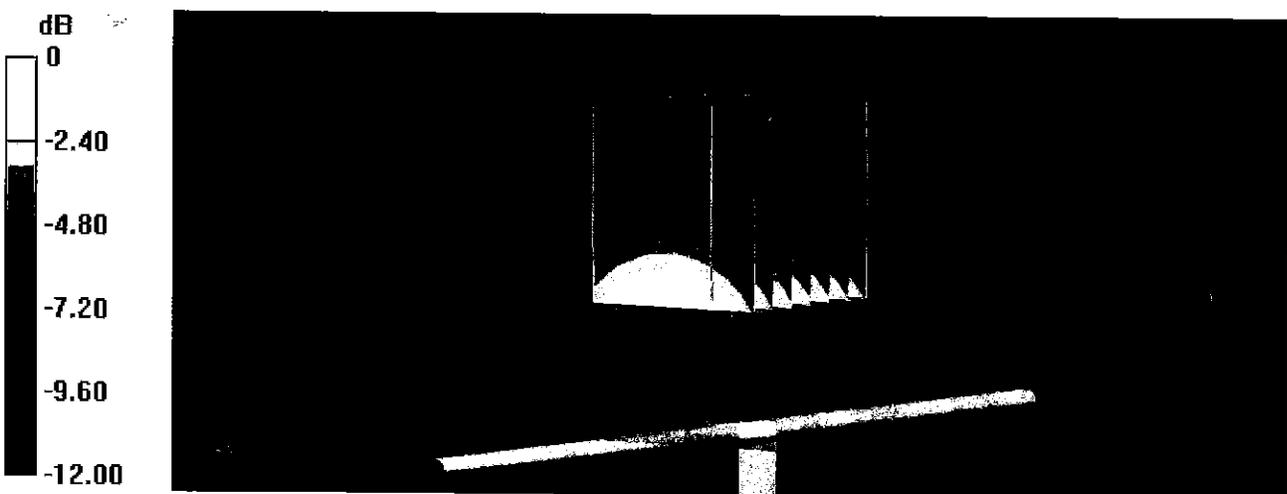

0 dB = 3.41 W/kg = 5.33 dBW/kg

Impedance Measurement Plot for Head TSL

8 Sep 2017 13:24:25

CHI S11 1 U FS 1: 50.227 Ω -3.0996 Ω 60.408 pF 850.000 000 MHz

*
De1
Ca

avg
16

H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -30.173 dB 850.000 000 MHz



Ca

avg
16

H1d

START 650.000 000 MHz

STOP 1 850.000 000 MHz

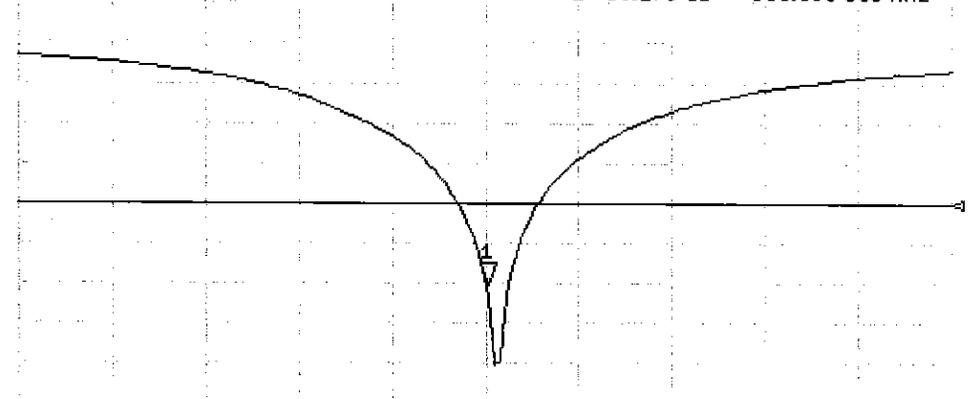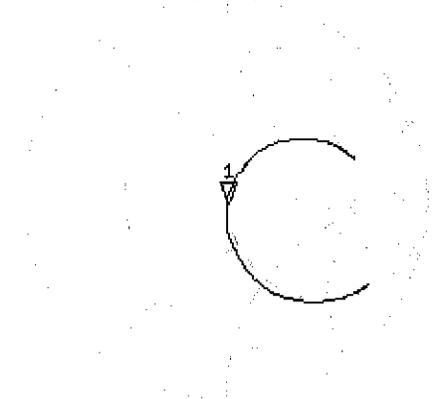

DASY5 Validation Report for Body TSL

Date: 08.09.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 850 MHz; Type: D850V2; Serial: D850V2 - SN:1010

Communication System: UID 0 - CW; Frequency: 850 MHz

Medium parameters used: $f = 850$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 55.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.11, 10.11, 10.11); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 61.09 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.79 W/kg

SAR(1 g) = 2.55 W/kg; SAR(10 g) = 1.67 W/kg

Maximum value of SAR (measured) = 3.36 W/kg

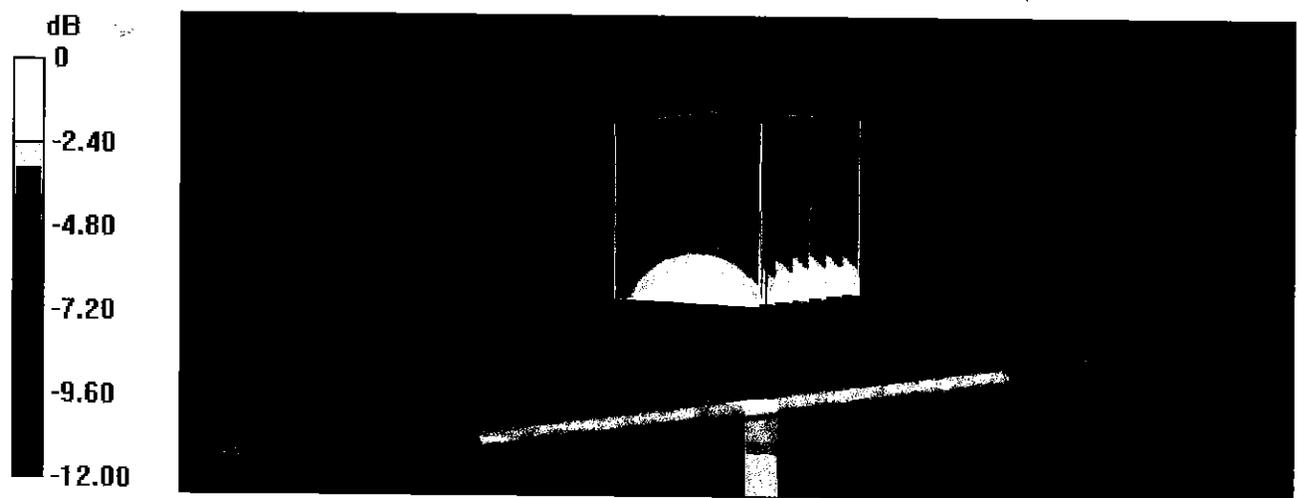

0 dB = 3.36 W/kg = 5.26 dBW/kg

Impedance Measurement Plot for Body TSL

8 Sep 2017 13:23:43
 [CH1] S11 1 U FS 1: 46.627 Ω -5.7715 Ω 32.442 pF 850.000 000 MHz

*
 Del
 CA

Avg
 16

H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -23.213 dB 850.000 000 MHz



CA

Avg
 16

H1d

START 650.000 000 MHz

STOP 1 850.000 000 MHz

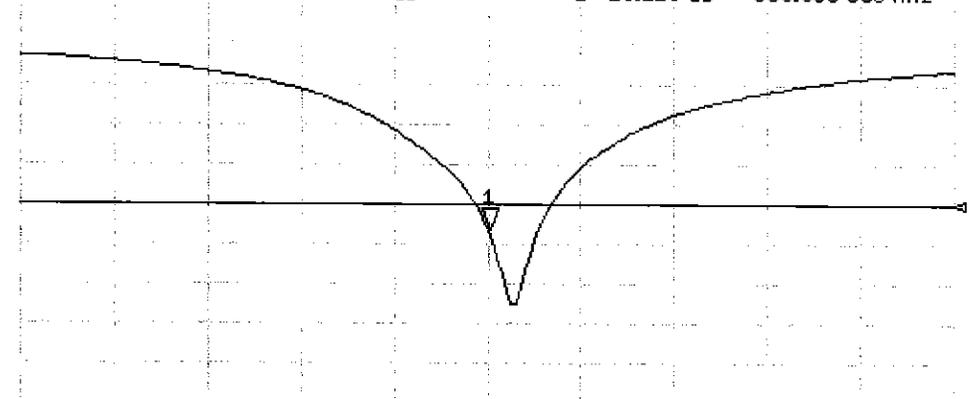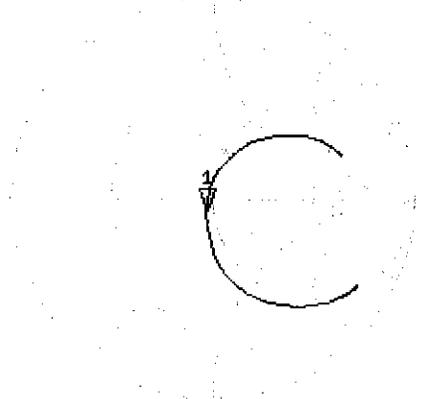

Certification of Calibration

Object: D850V2 – SN: 1010

Calibration procedure(s): Procedure for Calibration Extension for SAR Dipoles.

Extended Calibration date: September 08, 2018

Description: SAR Validation Dipole at 850 MHz.

Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8753ES	S-Parameter Network Analyzer	9/14/2017	Annual	9/14/2018	US39170118
Agilent	N5182A	MXG Vector Signal Generator	3/19/2018	Annual	3/19/2019	US46240505
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	343972
Anritsu	ML2496A	Power Meter	10/9/2017	Annual	10/9/2018	1138001
Anritsu	MA2411B	Pulse Power Sensor	11/15/2017	Annual	11/15/2018	1339007
Anritsu	MA2411B	Pulse Power Sensor	11/22/2017	Annual	11/22/2018	1339008
Control Company	4040	Temperature / Humidity Monitor	2/28/2018	Biennial	2/28/2020	150761911
Control Company	4352	Ultra Long Stem Thermometer	2/14/2017	Biennial	2/14/2019	170112507
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/4/2018	Annual	6/4/2019	MY53401181
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/15/2018	Annual	5/15/2019	1070
SPEAG	ES3DV3	SAR Probe	9/18/2017	Annual	9/18/2018	3287
SPEAG	DAE4	Data Acquisition Electronics	1/26/2018	Annual	1/26/2019	1533
SPEAG	EX3DV4	SAR Probe	1/26/2018	Annual	1/26/2019	7490
SPEAG	DAE4	Data Acquisition Electronics	1/26/2018	Annual	1/26/2019	1532

Measurement Uncertainty = $\pm 23\%$ (k=2)

	Name	Function	Signature
Calibrated By:	Sangmin Cha	Team Lead Engineer	
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	

DIPOLE CALIBRATION EXTENSION



Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.



The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:

Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) W/kg @ 23.0 dBm	Measured Head SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Head (10g) W/kg @ 23.0 dBm	Measured Head SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
9/8/2017	9/8/2018	1.432	1.986	2.01	1.21%	1.284	1.31	2.02%	50.2	48.9	1.3	-3.1	-2.3	0.8	-30.2	-30.1	0.30%	PASS
Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) W/kg @ 23.0 dBm	Measured Body SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 23.0 dBm	Measured Body SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
9/8/2017	9/8/2017	1.432	2.04	2.01	-1.47%	1.336	1.32	-1.20%	46.6	46.7	0.1	-5.8	-3.4	2.4	-23.2	-25.8	-11.20%	PASS

Impedance & Return-Loss Measurement Plot for Head TSL

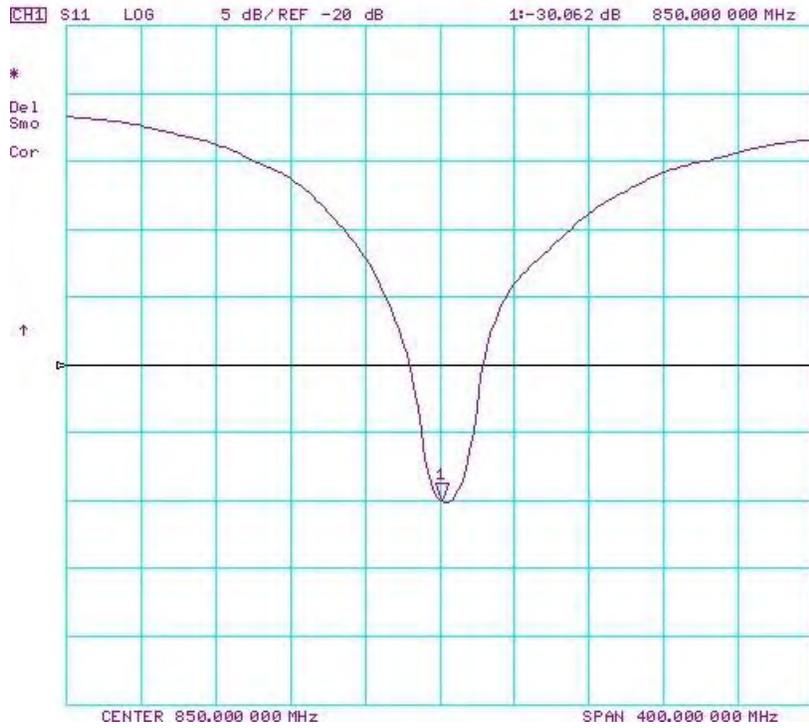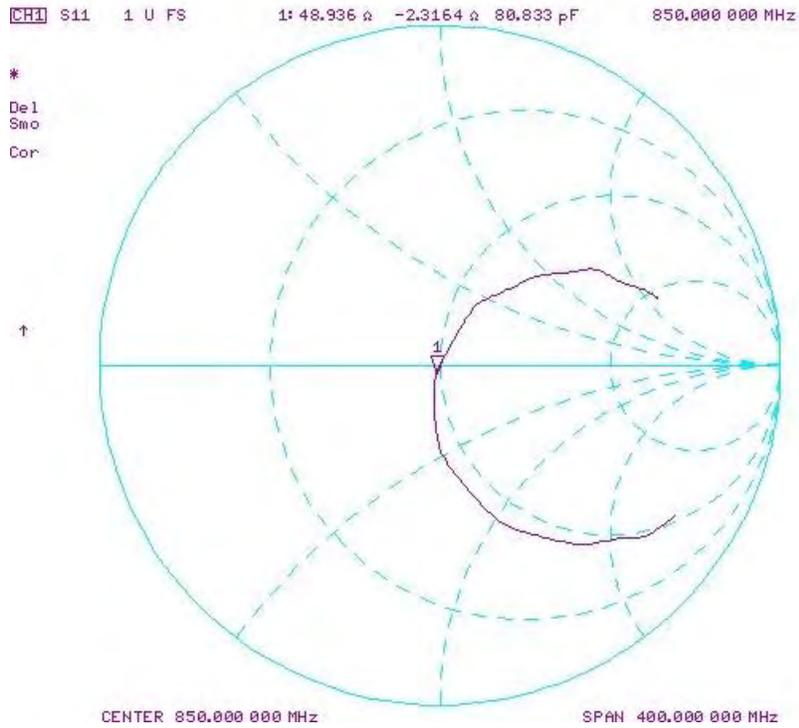

Impedance & Return-Loss Measurement Plot for Body TSL

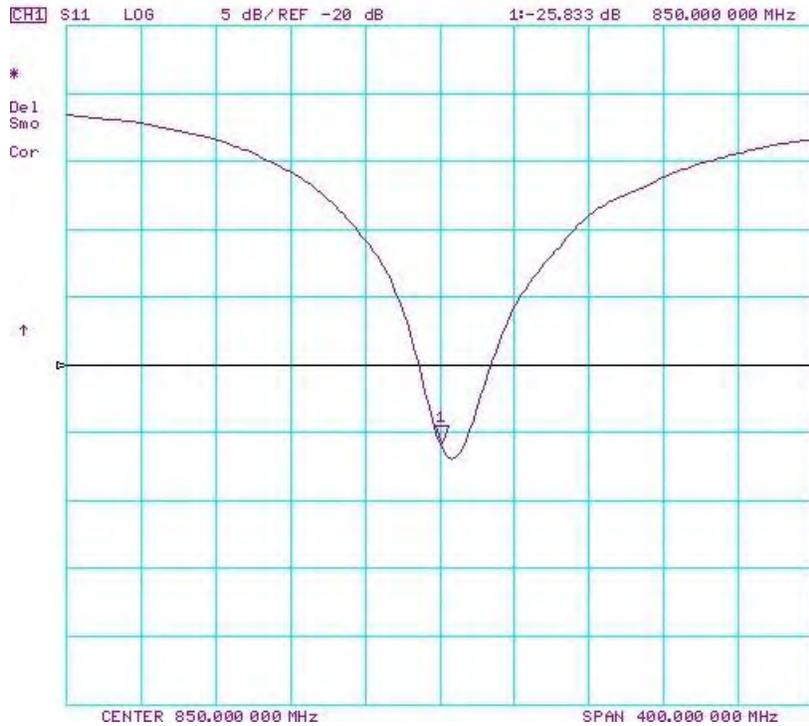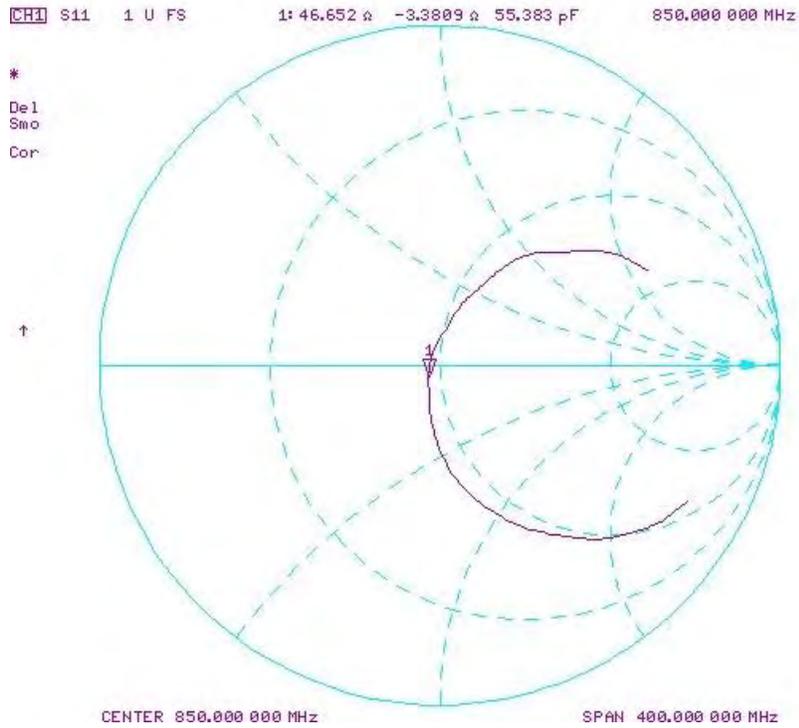

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kallbrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D1750V2-1104_Sep17**

CALIBRATION CERTIFICATE

Object **D1750V2 - SN:1104**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **September 07, 2017**

SC ✓
10/03/2017

SC ✓
9/7/2018

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02528)	Apr-18
Reference Probe EX3DV4	SN: 7349	31-May-17 (No. EX3-7349_May17)	May-18
DAE4	SN: 601	28-Mar-17 (No. DAE4-601_Mar17)	Mar-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB97480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by: **Michael Weber** Name: Michael Weber Function: Laboratory Technician

Approved by: **Katja Pokovic** Name: Katja Pokovic Technical Manager

Signature
M Weber
K Pokovic

Issued: September 7, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1750 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.1	1.37 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	39.1 \pm 6 %	1.36 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.11 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	36.4 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	4.81 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	19.2 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.4	1.49 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	53.8 \pm 6 %	1.46 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.03 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	36.6 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	4.85 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	19.6 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.8 Ω - 0.2 j Ω
Return Loss	- 41.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.5 Ω - 0.7 j Ω
Return Loss	- 28.7 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.217 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	May 16, 2013

DASY5 Validation Report for Head TSL

Date: 07.09.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1104

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.73, 8.73, 8.73); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 104.9 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 17.0 W/kg

SAR(1 g) = 9.11 W/kg; SAR(10 g) = 4.81 W/kg

Maximum value of SAR (measured) = 13.9 W/kg

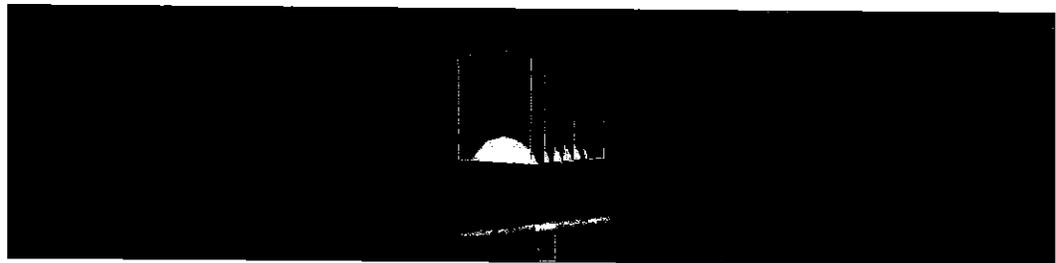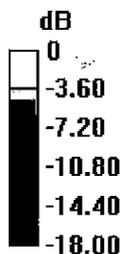


0 dB = 13.9 W/kg = 11.43 dBW/kg

Impedance Measurement Plot for Head TSL

7 Sep 2017 12:19:31

CH1 S11 1 U FS 1: 50.834 Ω -150.29 $m\Omega$ 604.73 pF 1 750.000 000 MHz

*
Del
CA

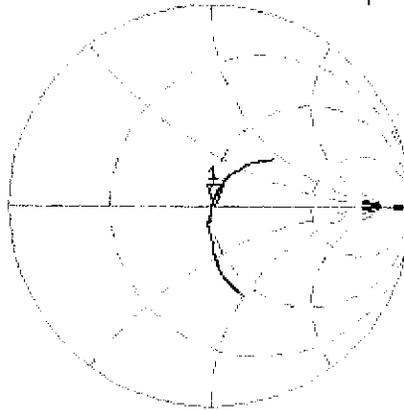

Avg
16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -41.481 dB 1 750.000 000 MHz

CA

Avg
16

H1d

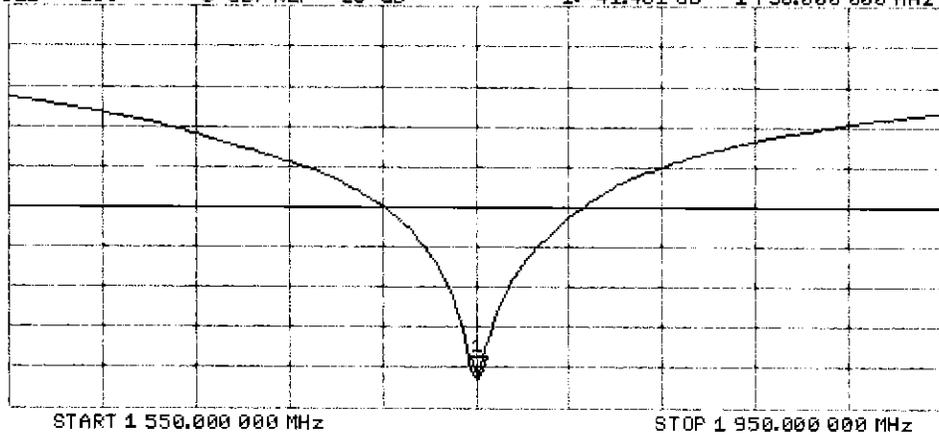

DASY5 Validation Report for Body TSL

Date: 07.09.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1104

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.46, 8.46, 8.46); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.30 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 15.6 W/kg

SAR(1 g) = 9.03 W/kg; SAR(10 g) = 4.85 W/kg

Maximum value of SAR (measured) = 12.9 W/kg

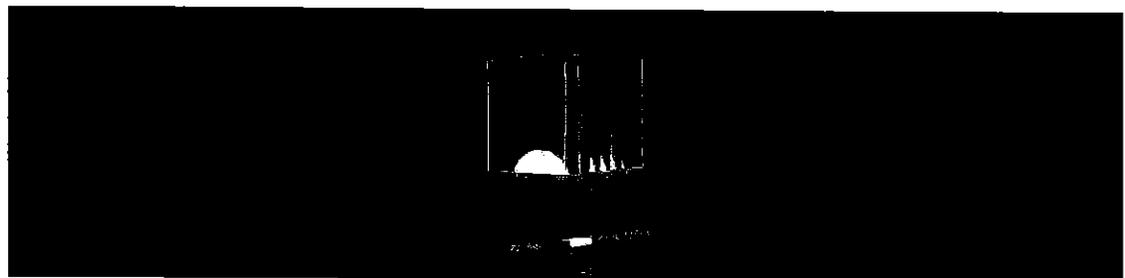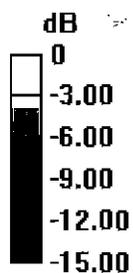

0 dB = 12.9 W/kg = 11.11 dBW/kg

Impedance Measurement Plot for Body TSL

7 Sep 2017 12:18:38

CH1 S11 1 U FS 1: 46.527 Ω -689.45 m Ω 131.91 pF 1 750.000 000 MHz

*


Del

CA

Avg

16

H1d

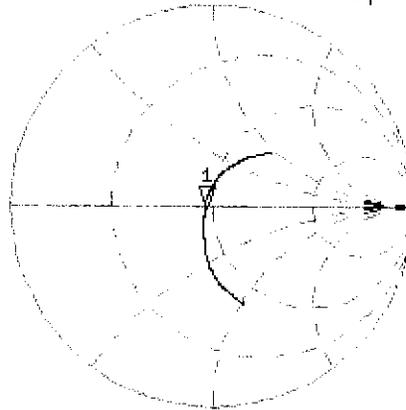


CH2 S11 LOG 5 dB/REF -20 dB 1: -28.710 dB 1 750.000 000 MHz

CA

Avg

16

H1d

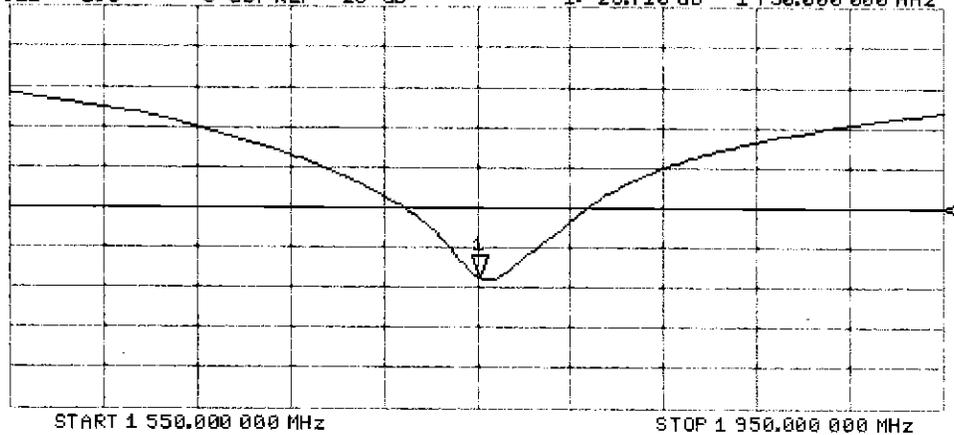

START 1 550.000 000 MHz

STOP 1 950.000 000 MHz

Certification of Calibration

Object D1750V2 – SN: 1104

Calibration procedure(s) Procedure for Calibration Extension for SAR Dipoles.


Extended Calibration date: September 07, 2018

Description: SAR Validation Dipole at 1750 MHz.

Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8753ES	S-Parameter Network Analyzer	9/14/2017	Annual	9/14/2018	US39170118
Agilent	N5182A	MXG Vector Signal Generator	3/19/2018	Annual	3/19/2019	US46240505
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	343972
Anritsu	ML2496A	Power Meter	10/9/2017	Annual	10/9/2018	1138001
Anritsu	MA2411B	Pulse Power Sensor	11/15/2017	Annual	11/15/2018	1339007
Anritsu	MA2411B	Pulse Power Sensor	11/22/2017	Annual	11/22/2018	1339008
Control Company	4040	Temperature / Humidity Monitor	2/28/2018	Biennial	2/28/2020	150761911
Control Company	4352	Ultra Long Stem Thermometer	2/14/2017	Biennial	2/14/2019	170112507
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/4/2018	Annual	6/4/2019	MY53401181
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/15/2018	Annual	5/15/2019	1070
SPEAG	ES3DV3	SAR Probe	9/18/2017	Annual	9/18/2018	3287
SPEAG	DAE4	Data Acquisition Electronics	1/26/2018	Annual	1/26/2019	1533

Measurement Uncertainty = $\pm 23\%$ (k=2)

	Name	Function	Signature
Calibrated By:	Sangmin Cha	Team Lead Engineer	
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	

DIPOLE CALIBRATION EXTENSION

Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:



1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.

The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:



Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) W/kg @ 20.0 dBm	Measured Head SAR (1g) W/kg @ 20.0 dBm	Deviation 1g (%)	Certificate SAR Target Head (10g) W/kg @ 20.0 dBm	Measured Head SAR (10g) W/kg @ 20.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
9/7/2017	9/7/2018	1.217	3.64	3.62	-0.55%	1.92	1.94	1.04%	50.8	49.8	1	-0.2	-0.3	0.1	-41.5	-35.9	13.50%	PASS

Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) W/kg @ 20.0 dBm	Measured Body SAR (1g) W/kg @ 20.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 20.0 dBm	Measured Body SAR (10g) W/kg @ 20.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
9/7/2017	9/7/2018	1.217	3.66	3.84	4.92%	1.96	2.07	5.61%	46.527	45.4	1.1	-0.69	-1.6	0.9	-28.7	-25.8	10.10%	PASS

Impedance & Return-Loss Measurement Plot for Head TSL

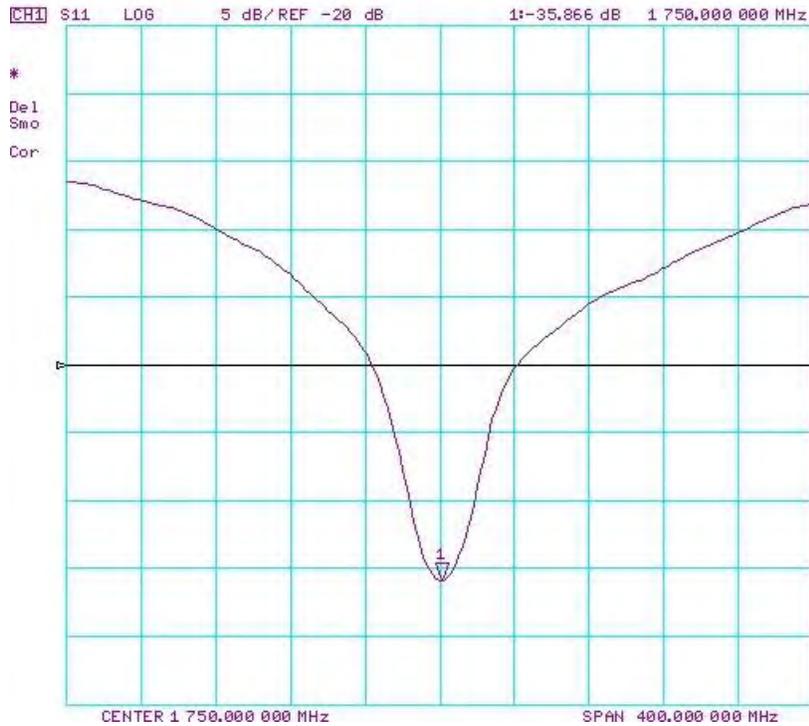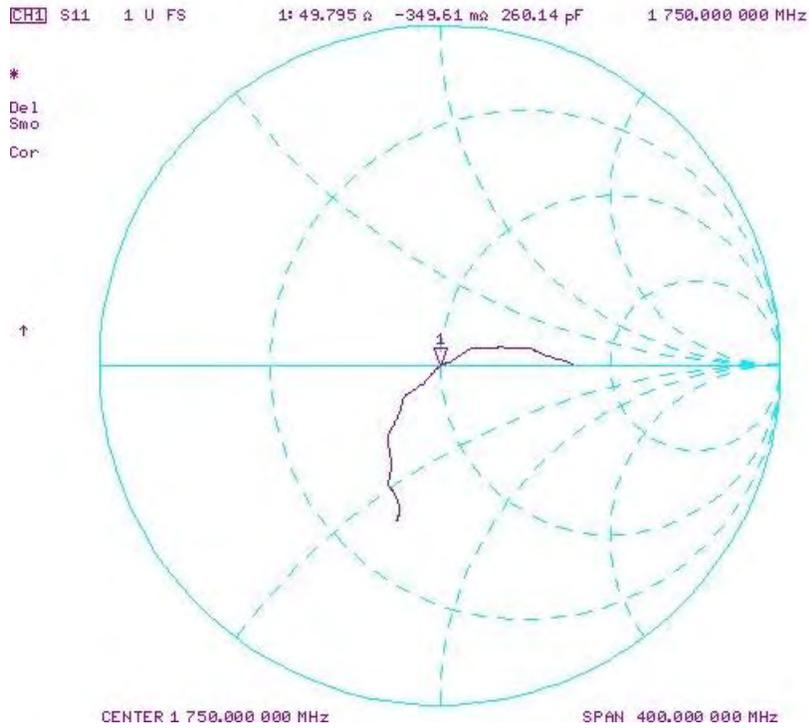

Impedance & Return-Loss Measurement Plot for Body TSL

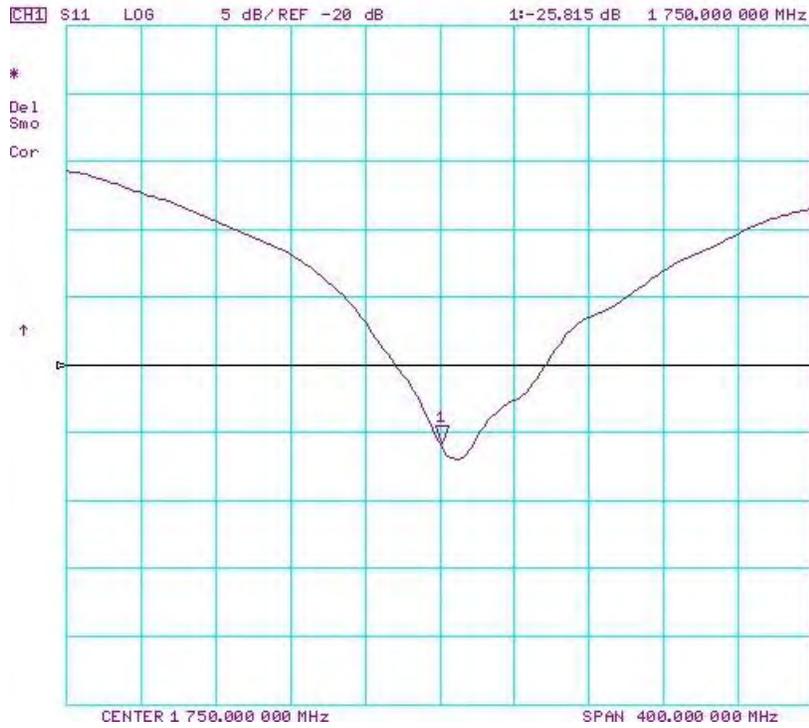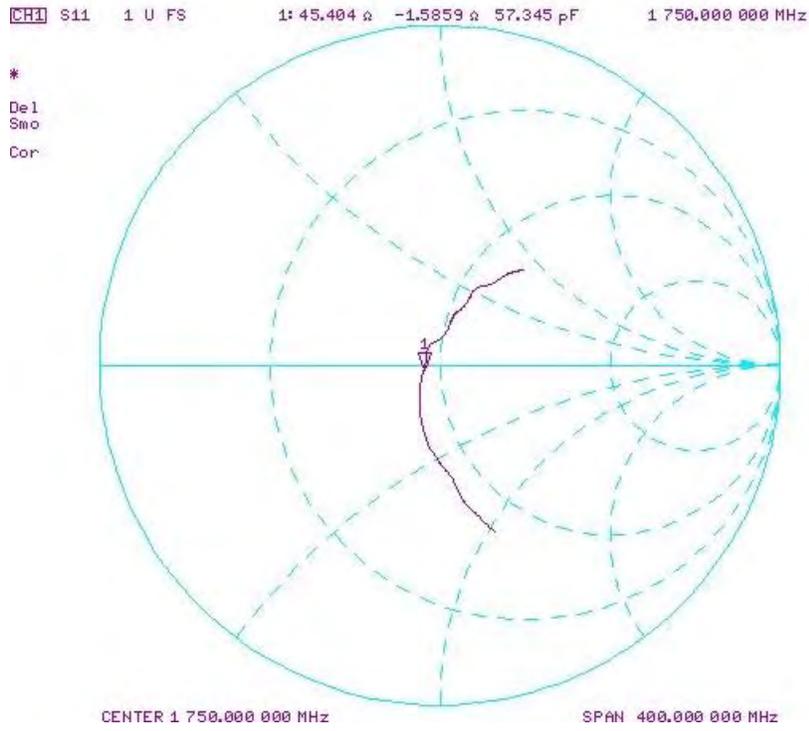

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D1750V2-1083_Jun17**

CALIBRATION CERTIFICATE

Object **D1750V2 - SN: 1083**

Calibration procedure(s) **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **June 09, 2017**

BNV
8/3/2017
SCV
6/1/2018

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20K)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	31-May-17 (No. EX3-7349_May17)	May-18
DAE4	SN: 601	28-Mar-17 (No. DAE4-601_Mar17)	Mar-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by: **Michael Weber** Name: Michael Weber Function: Laboratory Technician

Signature: *M. Weber*

Approved by: **Katja Pokovic** Name: Katja Pokovic Function: Technical Manager

Signature: *Katja Pokovic*

Issued: June 13, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- e) DASy4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1750 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.1	1.37 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	39.2 \pm 6 %	1.36 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.17 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	36.7 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	4.83 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	19.3 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.4	1.49 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	53.2 \pm 6 %	1.47 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.26 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	37.3 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	4.95 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	19.9 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.1 Ω - 1.2 j Ω
Return Loss	- 35.8 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.8 Ω - 1.2 j Ω
Return Loss	- 29.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.218 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	January 19, 2011

DASY5 Validation Report for Head TSL

Date: 08.06.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN: 1083

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.73, 8.73, 8.73); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 103.2 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 17.2 W/kg

SAR(1 g) = 9.17 W/kg; SAR(10 g) = 4.83 W/kg

Maximum value of SAR (measured) = 13.7 W/kg

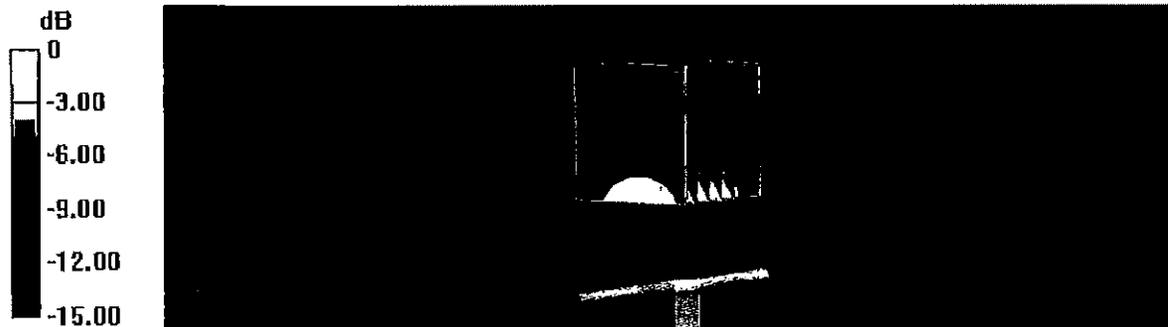


0 dB = 13.7 W/kg = 11.37 dBW/kg

Impedance Measurement Plot for Head TSL

8 Jun 2017 14:31:44

CH1 S11 1 U FS 3: 51.141 n -1.1875 n 76.585 pF 1 750.000 000 MHz

*
Del
CA

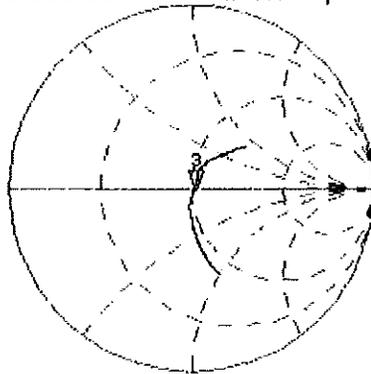

Av9
16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 3:-35.754 dB 1 750.000 000 MHz

CA

Av9
16

H1d

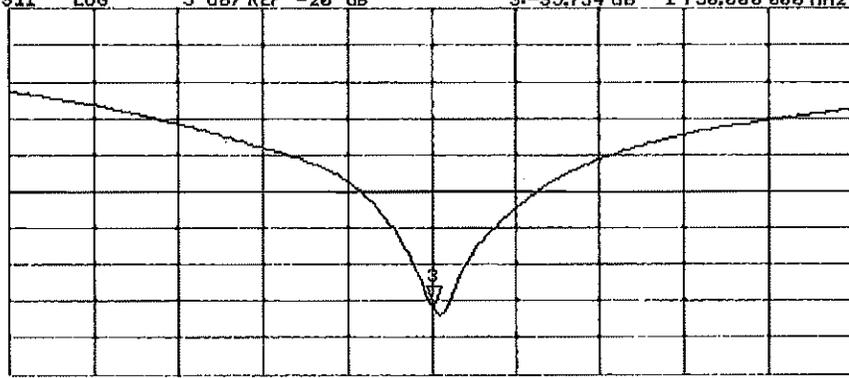

START 1 550.000 000 MHz

STOP 1 950.000 000 MHz

DASY5 Validation Report for Body TSL

Date: 09.06.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN: 1083

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.47$ S/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.46, 8.46, 8.46); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/ $P_{in}=250$ mW, $d=10$ mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 99.81 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 16.2 W/kg

SAR(1 g) = 9.26 W/kg; SAR(10 g) = 4.95 W/kg

Maximum value of SAR (measured) = 13.2 W/kg




0 dB = 13.2 W/kg = 11.21 dBW/kg

Impedance Measurement Plot for Body TSL

9 Jun 2017 12:05:25

CH1 S11 1 U FS 1: 45.814 n -1.1541 n 78.128 pF 1 750.000 000 MHz

*
De1
CA
Avg
16
H1d

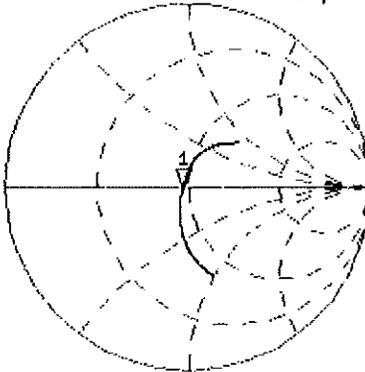

CH2 S11 LOG 5 dB/REF -20 dB 1: -29.117 dB 1 750.000 000 MHz



Certification of Calibration

Object: D1750V2 – SN: 1083

Calibration procedure(s): Procedure for Calibration Extension for SAR Dipoles.



Extended Calibration date: June 01, 2018

Description: SAR Validation Dipole at 1750 MHz.

Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8753ES	S-Parameter Network Analyzer	9/14/2017	Annual	9/14/2018	US39170118
Agilent	N5182A	MXG Vector Signal Generator	3/19/2018	Annual	3/19/2019	US46240505
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	343972
Anritsu	ML2496A	Power Meter	10/9/2017	Annual	10/9/2018	1138001
Anritsu	MA2411B	Pulse Power Sensor	11/15/2017	Annual	11/15/2018	1339007
Anritsu	MA2411B	Pulse Power Sensor	11/22/2017	Annual	11/22/2018	1339008
Control Company	4040	Temperature / Humidity Monitor	2/28/2018	Biennial	2/28/2020	150761911
Control Company	4352	Ultra Long Stem Thermometer	2/14/2017	Biennial	2/14/2019	170112507
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/1/2017	Annual	6/1/2018	MY53401181
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
SPEAG	DAKS-3.5	Portable DAK	9/5/2017	Annual	9/5/2018	1045
SPEAG	ES3DV3	SAR Probe	3/13/2018	Annual	3/13/2019	3131
SPEAG	EX3DV4	SAR Probe	1/26/2018	Annual	1/26/2019	7490
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/7/2018	Annual	3/7/2019	604
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/26/2018	Annual	1/26/2019	1532

Measurement Uncertainty = $\pm 23\%$ (k=2)

	Name	Function	Signature
Calibrated By:	Sangmin Cha	Biomedical Engineer II	
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	

DIPOLE CALIBRATION EXTENSION

Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.

The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:

Calibration Date	Expiration Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) SAR @ 20.0 dBm	Measured Head SAR (1g) SAR @ 20.0 dBm	Deviation (g) (%)	Certificate SAR Target Body (10g) SAR @ 20.0 dBm	Measured Body SAR (10g) SAR @ 20.0 dBm	Deviation (g) (%)	Certificate Impedance Head (Chr) Real	Measured Impedance Head (Chr) Real	Difference (Chr) Real	Certificate Impedance Head (Chr) Imaginary	Measured Impedance Head (Chr) Imaginary	Difference (Chr) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (dB) (%)	PASS/FAIL
6/9/2017	6/1/2018	1.28	3.67	3.67	0.00%	1.90	1.90	0.00%	51.1	50.2	0.9	-1.2	-1	0.2	-35.8	-34.4	-7.50%	PASS


Calibration Date	Expiration Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) SAR @ 20.0 dBm	Measured Body SAR (1g) SAR @ 20.0 dBm	Deviation (g) (%)	Certificate SAR Target Body (10g) SAR @ 20.0 dBm	Measured Body SAR (10g) SAR @ 20.0 dBm	Deviation (g) (%)	Certificate Impedance Body (Chr) Real	Measured Impedance Body (Chr) Real	Difference (Chr) Real	Certificate Impedance Body (Chr) Imaginary	Measured Impedance Body (Chr) Imaginary	Difference (Chr) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (dB) (%)	PASS/FAIL
6/9/2017	6/1/2018	1.28	3.73	3.51	-5.36%	1.90	1.88	-5.53%	46.6	46.2	0.6	-1.2	-0.7	0.5	-29.1	-28	-3.78%	PASS

Impedance & Return-Loss Measurement Plot for Head TSL

CHI S11 1 U FS 1: 50.232 Ω -1.0000 Ω 98.946 pF 1 750.000 000 MHz

*
De1
Smo
Cor

↑


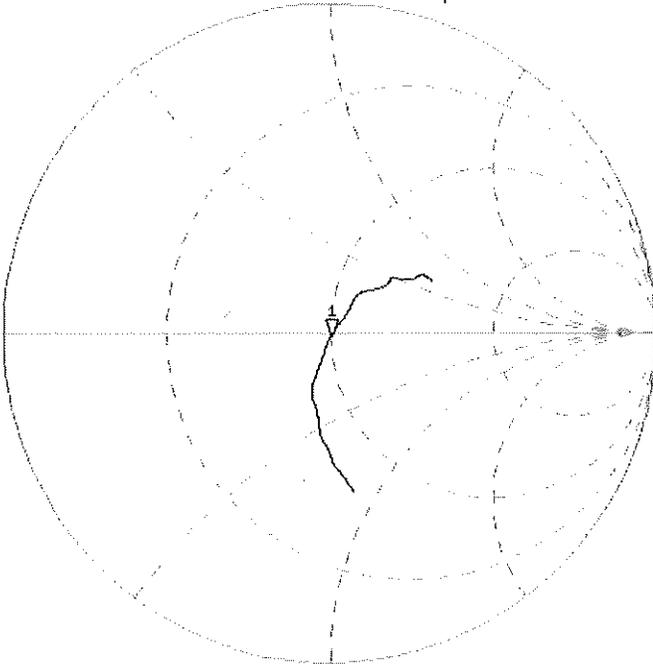


CHI S11 LOG 5 dB/REF -20 dB 1: -38.434 dB 1 750.000 000 MHz

*
De1
Smo
Cor



Impedance & Return-Loss Measurement Plot for Body TSL

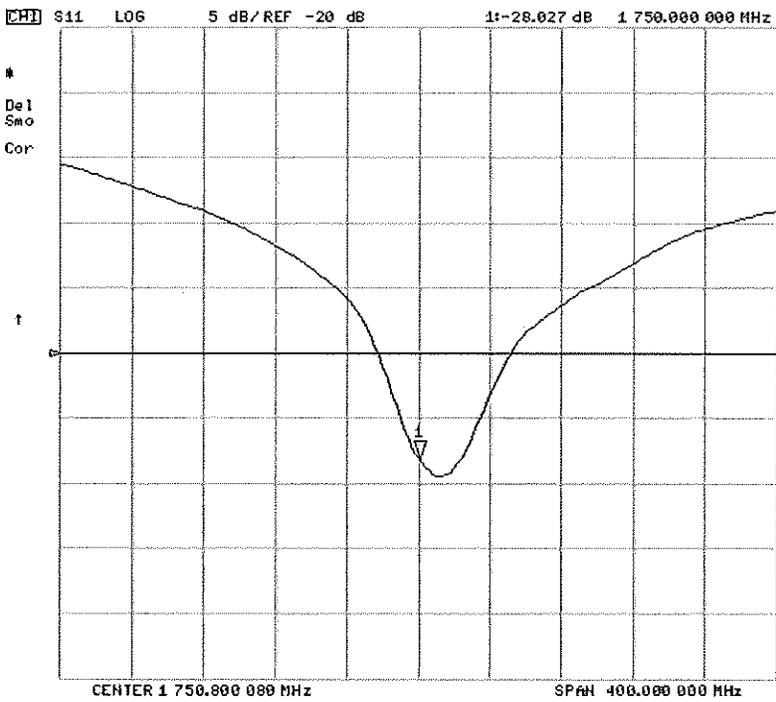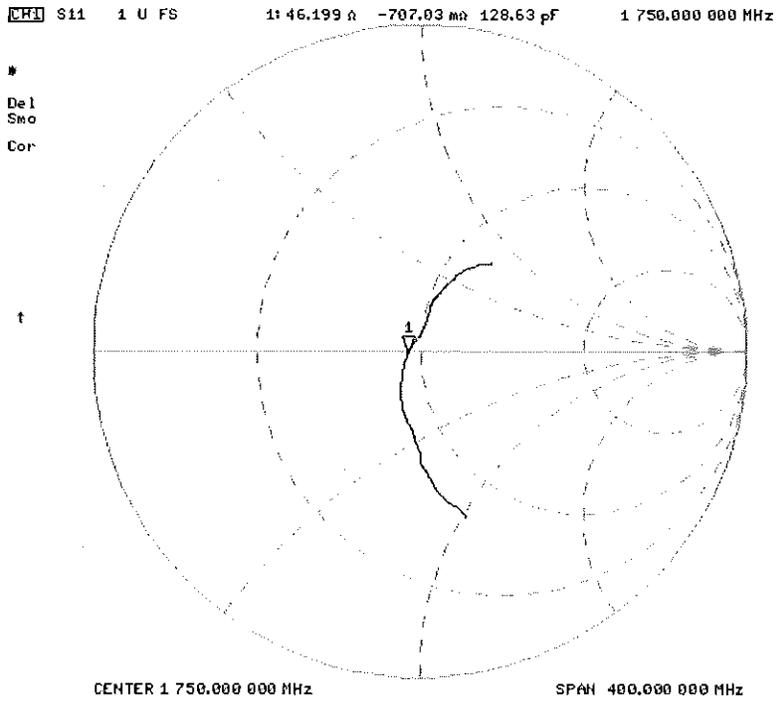



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D1750V2-1092_May18**

CALIBRATION CERTIFICATE

Object **D1750V2 - SN:1092**

Calibration procedure(s) **QA CAL-05.v10
Calibration procedure for dipole validation kits above 700 MHz**

*SC ✓
5/31/2018*

Calibration date: **May 15, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-18 (No. 217-02682)	Apr-19
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-18 (No. 217-02683)	Apr-19
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by: **Manu Seitz** Function: **Laboratory Technician** Signature:

Approved by: **Katja Pokovic** Technical Manager

Issued: May 17, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.1
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1750 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.1	1.37 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	39.0 \pm 6 %	1.34 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	8.95 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	36.1 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	4.73 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	19.0 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.4	1.49 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	53.2 \pm 6 %	1.46 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	8.99 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	36.4 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	4.81 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	19.4 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	49.2 Ω - 1.0 j Ω
Return Loss	- 37.8 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	44.8 Ω - 0.6 j Ω
Return Loss	- 25.2 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.217 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 07, 2012

DASY5 Validation Report for Head TSL

Date: 15.05.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1092

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.5, 8.5, 8.5) @ 1750 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 106.8 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 16.3 W/kg

SAR(1 g) = 8.95 W/kg; SAR(10 g) = 4.73 W/kg

Maximum value of SAR (measured) = 13.8 W/kg

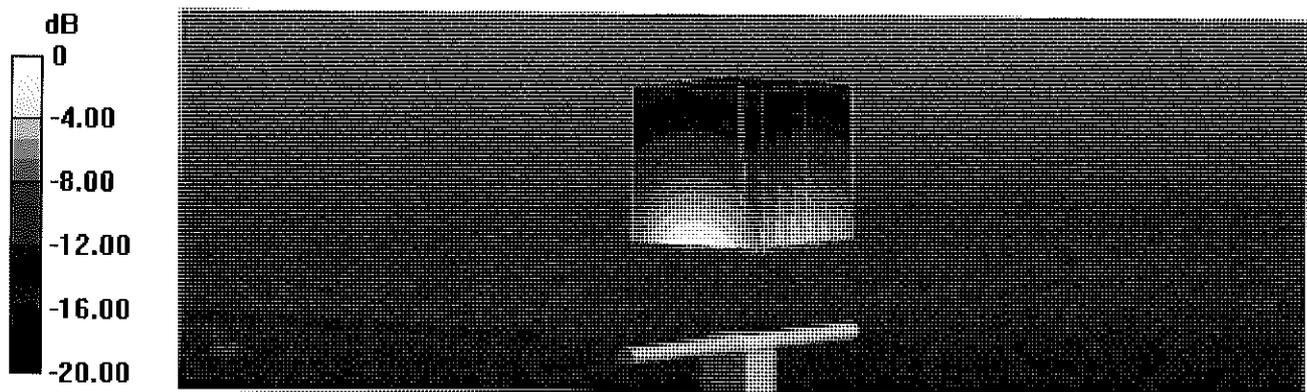


Impedance Measurement Plot for Head TSL

15 May 2018 11:09:26


[CH1] S11 1 U FS 1: 49.203 Ω -1.0117 Ω 89.892 pF 1 750.000 000 MHz

*
Del
CA
Avg
16
H1d

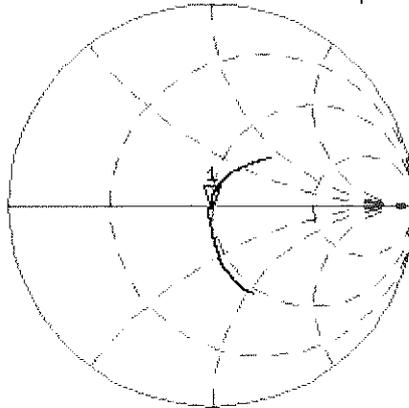

CH2 S11 LOG 5 dB/REF -20 dB 1:-37.762 dB 1 750.000 000 MHz

CA
Avg
16
H1d

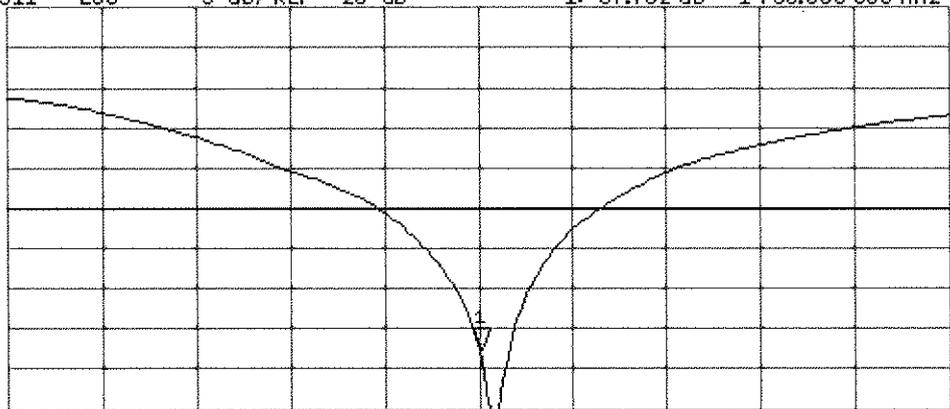

START 1 550.000 000 MHz

STOP 1 950.000 000 MHz

DASY5 Validation Report for Body TSL

Date: 15.05.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1092

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.35, 8.35, 8.35) @ 1750 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.4 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 15.8 W/kg

SAR(1 g) = 8.99 W/kg; SAR(10 g) = 4.81 W/kg

Maximum value of SAR (measured) = 13.4 W/kg

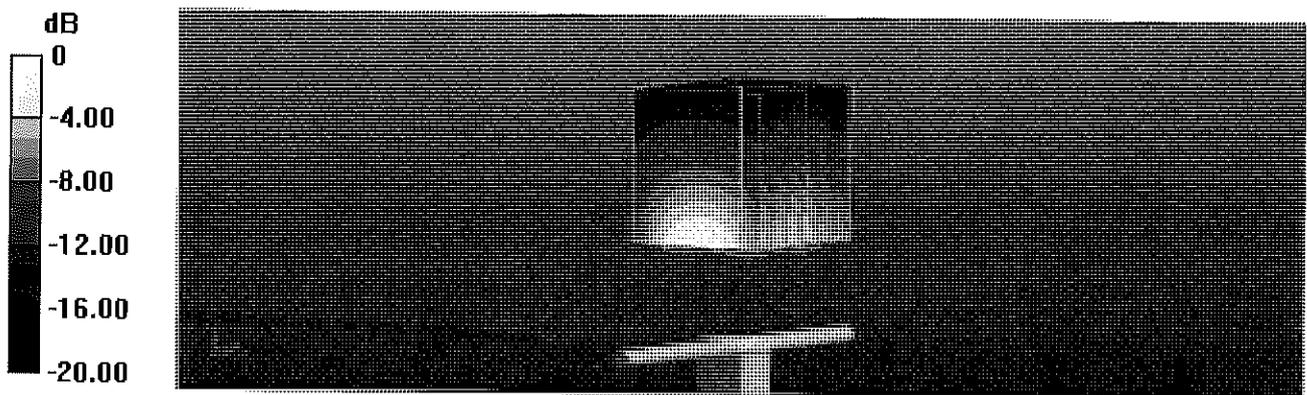


0 dB = 13.4 W/kg = 11.27 dBW/kg

Impedance Measurement Plot for Body TSL

15 May 2018 11:08:25


CH1 S11 1 U F8 1: 44.846 Ω -589.84 $m\Omega$ 154.19 pF 1 750.000 000 MHz

*
De1
CA
Avg
16
H1d

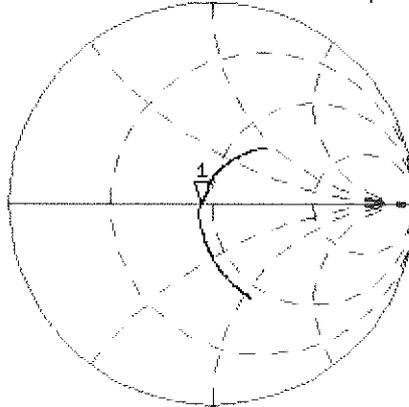

CH2 S11 LOG 5 dB/REF -20 dB 1:-25.245 dB 1 750.000 000 MHz

CA
Avg
16
H1d

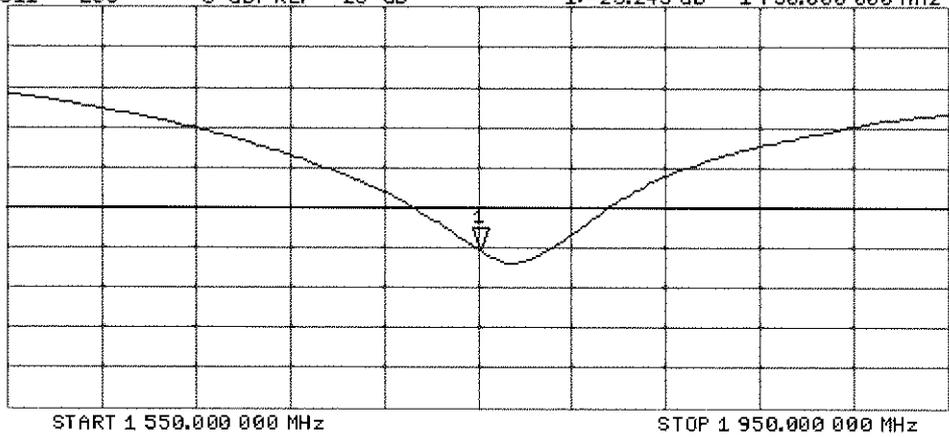



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D1900V2-5d180_Aug17**

CALIBRATION CERTIFICATE

Object: **D1900V2 SN:5d180**

Calibration procedure(s): **QA CAL:05.v9
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **August 16, 2017**

PMV
8/27/17
SCV
8/1/18

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	31-May-17 (No. EX3-7349_May17)	May-18
DAE4	SN: 601	28-Mar-17 (No. DAE4-601_Mar17)	Mar-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by: **Johannes Kurkka** (Name) / **Laboratory Technician** (Function) / *[Signature]* (Signature)

Approved by: **Kalja Pokovic** (Name) / **Technical Manager** (Function) / *[Signature]* (Signature)

Issued: August 16, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	40.6 \pm 6 %	1.36 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.60 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	39.2 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.09 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	20.6 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	54.1 \pm 6 %	1.48 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.68 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	39.5 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.17 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.9 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	54.0 Ω + 5.7 j Ω
Return Loss	- 23.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	49.6 Ω + 6.5 j Ω
Return Loss	- 23.7 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.203 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	August 23, 2013

DASY5 Validation Report for Head TSL

Date: 16.08.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d180

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.43, 8.43, 8.43); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 103.7 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 17.6 W/kg

SAR(1 g) = 9.6 W/kg; SAR(10 g) = 5.09 W/kg

Maximum value of SAR (measured) = 14.1 W/kg

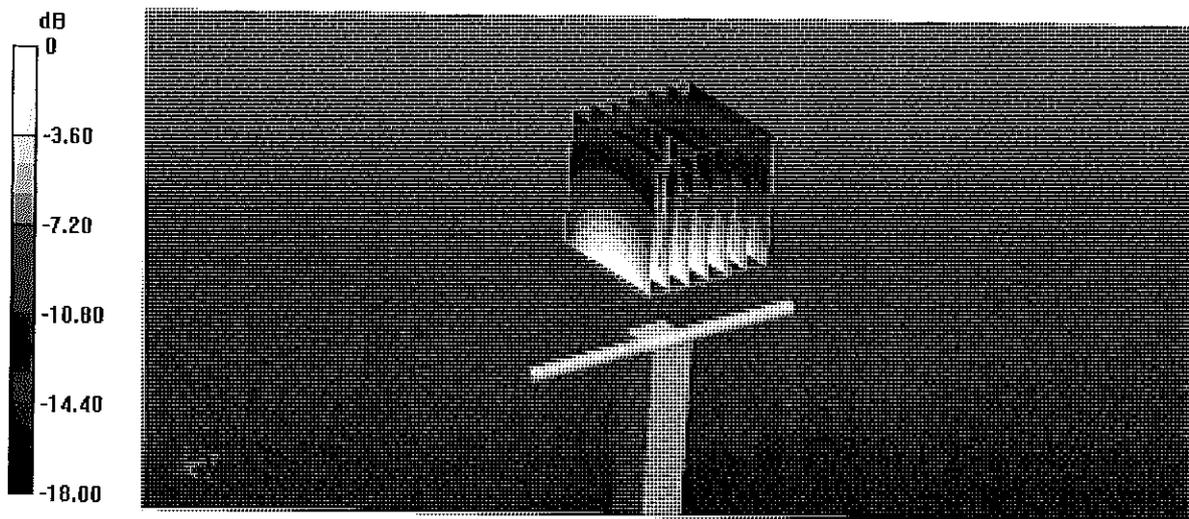

0 dB = 14.1 W/kg = 11.49 dBW/kg

Impedance Measurement Plot for Head TSL

16 Aug 2017 13:06:53

CH1 S11 1 U FS 1: 54.041 Ω 5.7129 Ω 478.54 μH 1 900.000 000 MHz

*


Del

CA

Avg

16

H1d

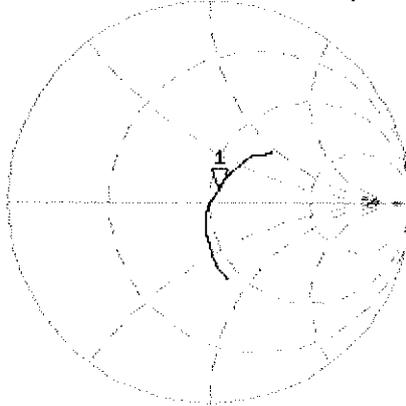


CH2 S11 LOG 5 dB/REF -20 dB 1:-23.454 dB 1 900.000 000 MHz

CA

Avg

16

H1d

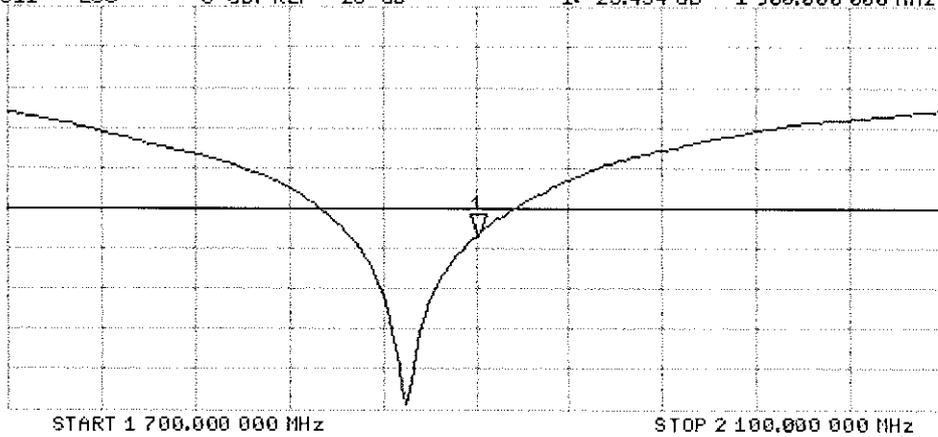

DASY5 Validation Report for Body TSL

Date: 16.08.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d180

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.48$ S/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.2, 8.2, 8.2); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.33 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 9.68 W/kg; SAR(10 g) = 5.17 W/kg

Maximum value of SAR (measured) = 14.1 W/kg

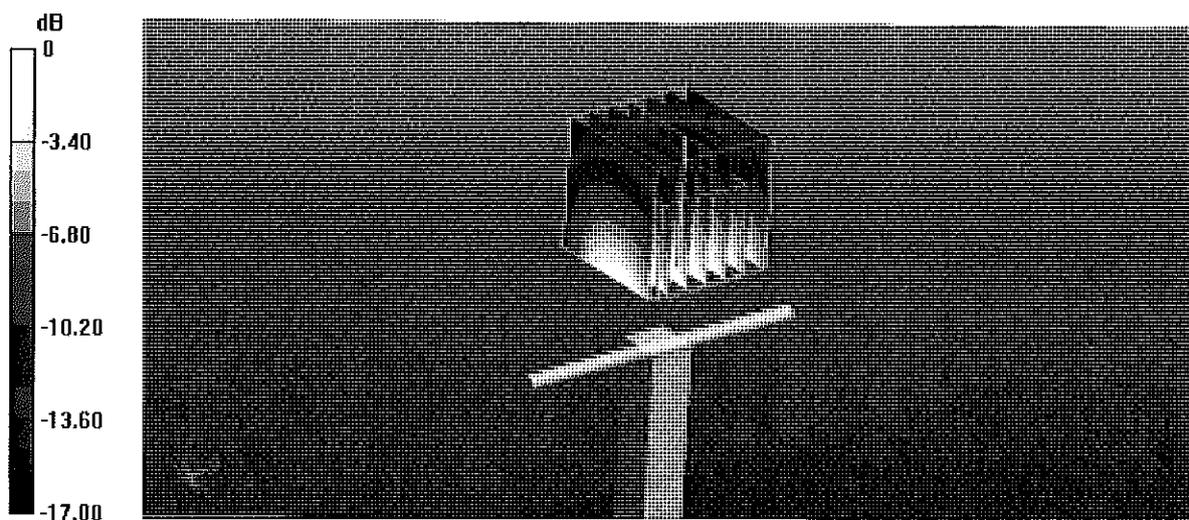


0 dB = 14.1 W/kg = 11.49 dBW/kg

Impedance Measurement Plot for Body TSL

16 Aug 2017 13:06:08

CH1 S11 1 U FS 1: 49.605 Ω 6.4844 Ω 543.17 μ H 1 900.000 000 MHz

*
De1
Ca

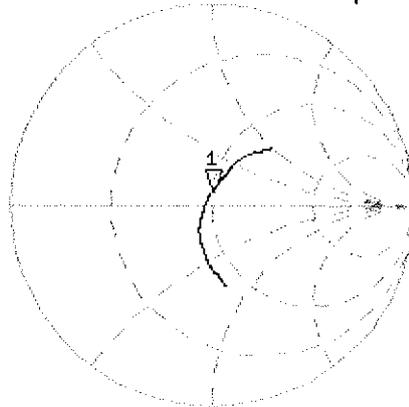

Avg
16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-23.719 dB 1 900.000 000 MHz

Ca

Avg
16

H1d

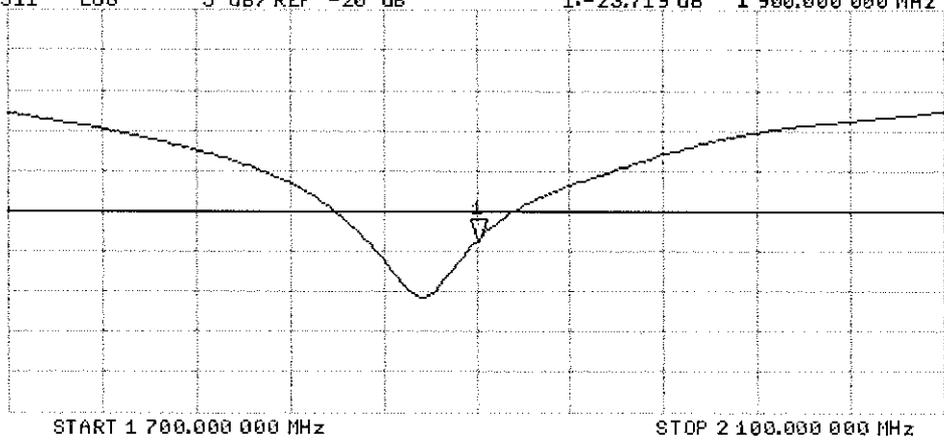

Certification of Calibration

Object D1900V2 – SN: 5d180

Calibration procedure(s) Procedure for Calibration Extension for SAR Dipoles.


Extended Calibration date: August 01, 2018

Description: SAR Validation Dipole at 1900 MHz.

Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8753ES	S-Parameter Network Analyzer	9/14/2017	Annual	9/14/2018	US39170118
Agilent	N5182A	MXG Vector Signal Generator	3/19/2018	Annual	3/19/2019	US46240505
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	343972
Anritsu	ML2496A	Power Meter	10/9/2017	Annual	10/9/2018	1138001
Anritsu	MA2411B	Pulse Power Sensor	11/15/2017	Annual	11/15/2018	1339007
Anritsu	MA2411B	Pulse Power Sensor	11/22/2017	Annual	11/22/2018	1339008
Control Company	4040	Temperature / Humidity Monitor	2/28/2018	Biennial	2/28/2020	150761911
Control Company	4352	Ultra Long Stem Thermometer	2/14/2017	Biennial	2/14/2019	170112507
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/4/2018	Annual	6/4/2019	MY53401181
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
SPEAG	DAKS-3.5	Portable DAK	9/5/2017	Annual	9/5/2018	1045
SPEAG	ES3DV3	SAR Probe	2/13/2018	Annual	2/13/2019	3329
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/8/2018	Annual	2/8/2019	1403

Measurement Uncertainty = $\pm 23\%$ (k=2)

	Name	Function	Signature
Calibrated By:	Sangmin Cha	Biomedical Engineer II	
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	

DIPOLE CALIBRATION EXTENSION

Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:



1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.

The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:



Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) W/kg @ 20.0 dBm	Measured Head SAR (1g) W/kg @ 20.0 dBm	Deviation 1g (%)	Certificate SAR Target Head (10g) W/kg @ 20.0 dBm	Measured Head SAR (10g) W/kg @ 20.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
8/16/2017	8/1/2018	1.203	3.92	3.81	-2.81%	2.06	1.97	-4.37%	54	52.5	1.5	5.7	4.2	1.5	-23.5	-26.5	-12.80%	PASS

Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) W/kg @ 20.0 dBm	Measured Body SAR (1g) W/kg @ 20.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 20.0 dBm	Measured Body SAR (10g) W/kg @ 20.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
8/16/2017	8/1/2018	1.203	3.95	4.29	8.61%	2.09	2.21	5.74%	49.6	48.1	1.5	6.5	3.9	2.6	-23.7	-26.7	-12.70%	PASS

Impedance & Return-Loss Measurement Plot for Head TSL

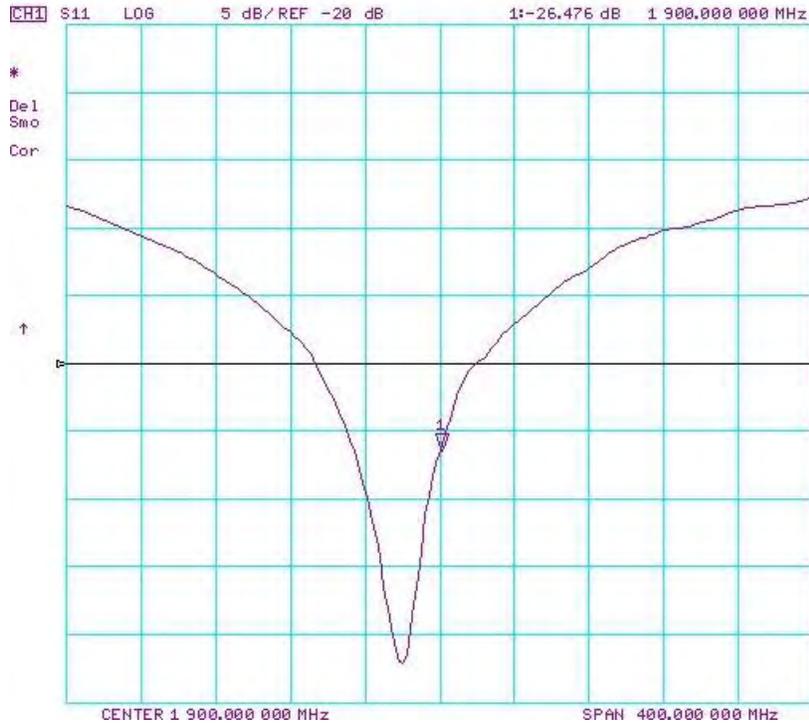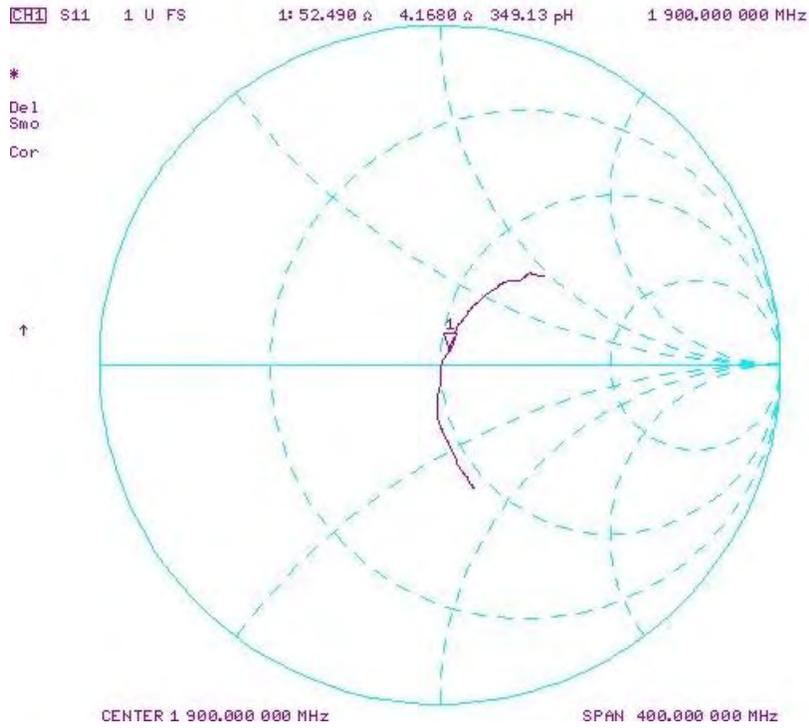

Impedance & Return-Loss Measurement Plot for Body TSL

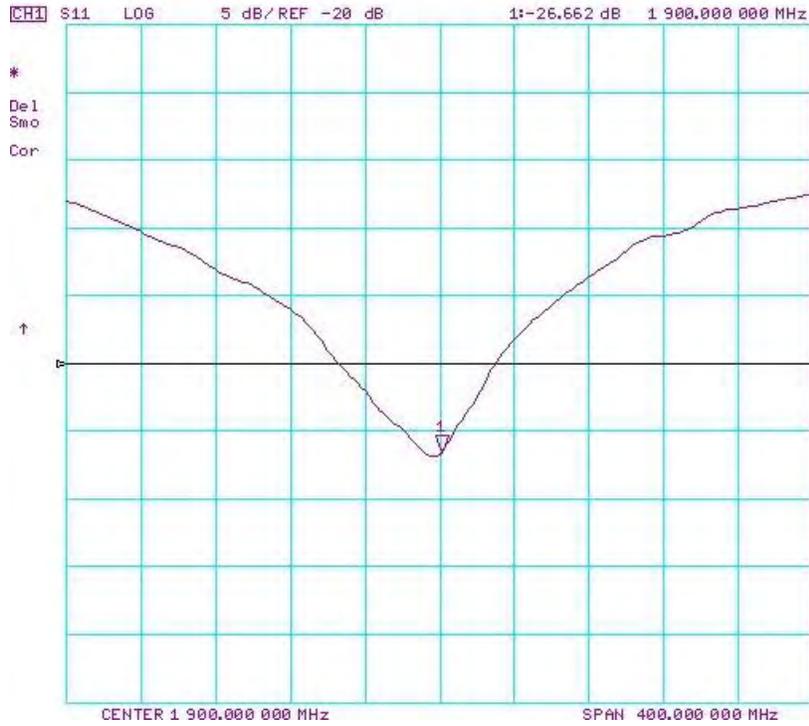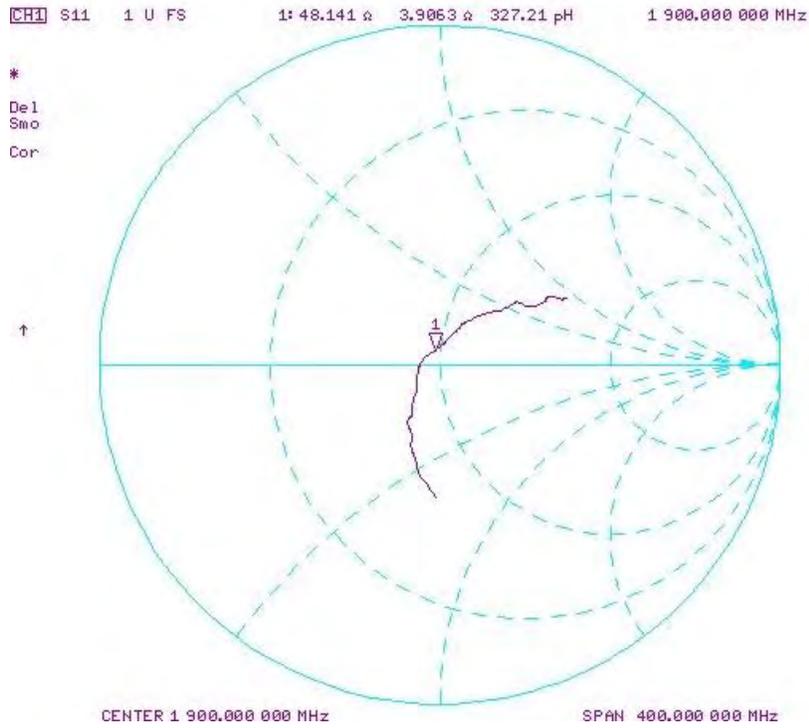



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D1900V2-5d181_Sep17**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN:5d181**

Calibration procedure(s) **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

*SC ✓
10/03/2017
SC ✓
9/7/2018*

Calibration date: **September 07, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	31-May-17 (No. EX3-7349_May17)	May-18
DAE4	SN: 601	28-Mar-17 (No. DAE4-601_Mar17)	Mar-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-18)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by: **Jeton Kastrati** Name: **Jeton Kastrati** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Name: **Katja Pokovic** Function: **Technical Manager**

[Handwritten signatures]

Issued: September 7, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	39.0 \pm 6 %	1.38 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.85 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	39.5 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.15 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	20.6 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	54.3 \pm 6 %	1.47 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.65 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	39.5 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.14 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.9 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$53.7 \Omega + 4.6 j\Omega$
Return Loss	- 24.9 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$49.2 \Omega + 5.6 j\Omega$
Return Loss	- 24.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.200 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	August 23, 2013

DASY5 Validation Report for Head TSL

Date: 07.09.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d181

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.43, 8.43, 8.43); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 106.8 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 18.5 W/kg

SAR(1 g) = 9.85 W/kg; SAR(10 g) = 5.15 W/kg

Maximum value of SAR (measured) = 14.8 W/kg

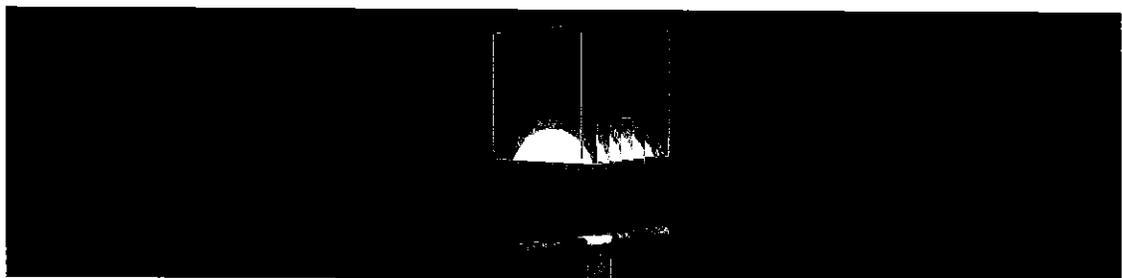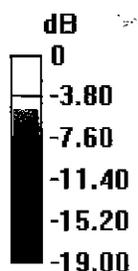

0 dB = 14.8 W/kg = 11.70 dBW/kg

Impedance Measurement Plot for Head TSL

7 Sep 2017 09:10:32


CH1 S11 1 U FS 3: 53.668 Ω 4.5957 Ω 384.96 pF 1 900.000 000 MHz

*
De1

CA

Avg
16

H1d

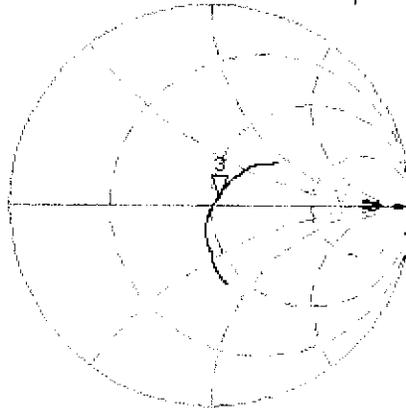


CH2 S11 LOG 5 dB/REF -20 dB 3: -24.931 dB 1 900.000 000 MHz

CA

Avg
16

H1d

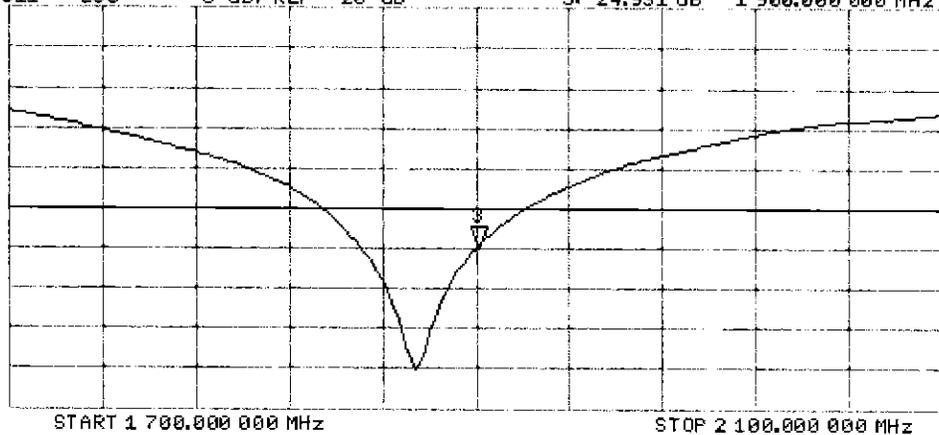

DASY5 Validation Report for Body TSL

Date: 07.09.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d181

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.47$ S/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.2, 8.2, 8.2); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.4 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 17.0 W/kg

SAR(1 g) = 9.65 W/kg; SAR(10 g) = 5.14 W/kg

Maximum value of SAR (measured) = 13.8 W/kg

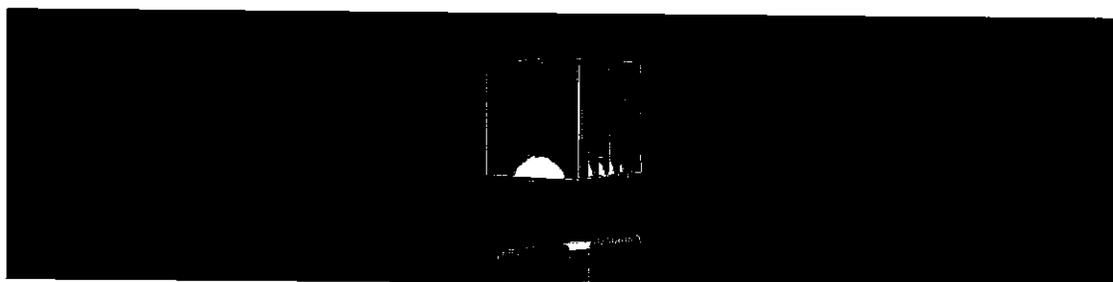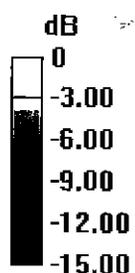


0 dB = 13.8 W/kg = 11.40 dBW/kg

Impedance Measurement Plot for Body TSL

7 Sep 2017 09:09:41

CH1 S11 1 U FS 3: 49.201 Ω 5.6484 Ω 473.15 pH 1 900.000 000 MHz

*
De1
CA

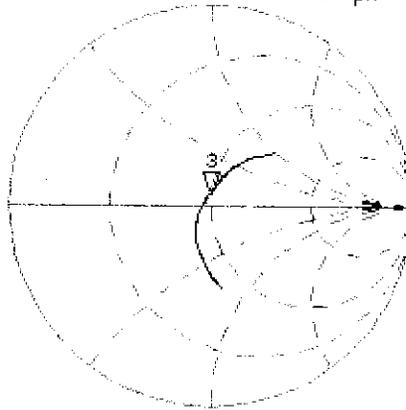

Avg
16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 3: -24.816 dB 1 900.000 000 MHz

CA

Avg
16

H1d

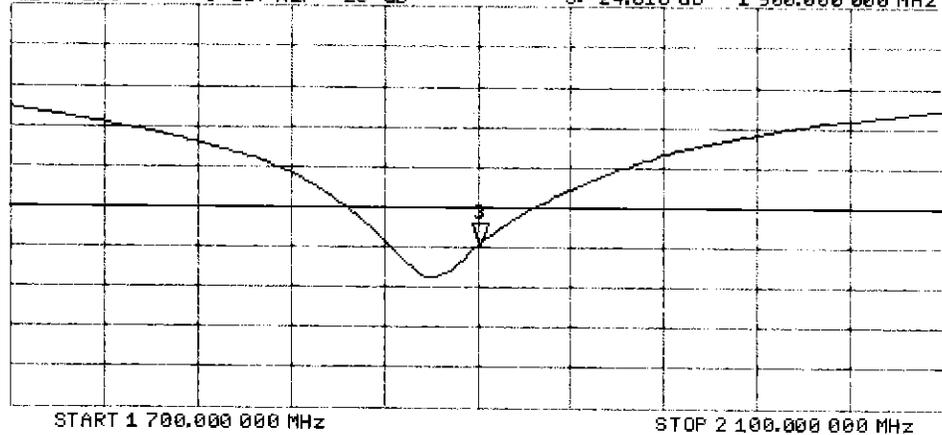

Certification of Calibration

Object: D1900V2 – SN: 5d181

Calibration procedure(s): Procedure for Calibration Extension for SAR Dipoles.

Extended Calibration date: September 07, 2018

Description: SAR Validation Dipole at 1900 MHz.

Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8753ES	S-Parameter Network Analyzer	9/14/2017	Annual	9/14/2018	US39170118
Agilent	N5182A	MXG Vector Signal Generator	3/19/2018	Annual	3/19/2019	US46240505
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	343972
Anritsu	ML2496A	Power Meter	10/9/2017	Annual	10/9/2018	1138001
Anritsu	MA2411B	Pulse Power Sensor	11/15/2017	Annual	11/15/2018	1339007
Anritsu	MA2411B	Pulse Power Sensor	11/22/2017	Annual	11/22/2018	1339008
Control Company	4040	Temperature / Humidity Monitor	2/28/2018	Biennial	2/28/2020	150761911
Control Company	4352	Ultra Long Stem Thermometer	2/14/2017	Biennial	2/14/2019	170112507
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/4/2018	Annual	6/4/2019	MY53401181
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/15/2018	Annual	5/15/2019	1070
SPEAG	ES3DV3	SAR Probe	9/18/2017	Annual	9/18/2018	3287
SPEAG	DAE4	Data Acquisition Electronics	1/26/2018	Annual	1/26/2019	1533
SPEAG	ES3DV3	SAR Probe	3/13/2018	Annual	3/13/2019	3131
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/7/2018	Annual	3/7/2019	604

Measurement Uncertainty = $\pm 23\%$ (k=2)

	Name	Function	Signature
Calibrated By:	Sangmin Cha	Team Lead Engineer	
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	

DIPOLE CALIBRATION EXTENSION



Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.



The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:

Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) W/kg @ 20.0 dBm	Measured Head SAR (1g) W/kg @ 20.0 dBm	Deviation 1g (%)	Certificate SAR Target Head (10g) W/kg @ 20.0 dBm	Measured Head SAR (10g) W/kg @ 20.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
9/7/2017	9/7/2018	1.2	3.95	3.99	1.01%	2.06	2.07	0.49%	53.7	49.6	4.1	4.6	2.6	2	-24.9	-28.9	-16.10%	PASS
Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) W/kg @ 20.0 dBm	Measured Body SAR (1g) W/kg @ 20.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 20.0 dBm	Measured Body SAR (10g) W/kg @ 20.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
9/7/2017	9/7/2018	1.2	3.95	4.13	4.56%	2.09	2.14	2.39%	49.2	45.8	3.4	5.6	2.1	3.5	-24.8	-24.7	0.40%	PASS

Impedance & Return-Loss Measurement Plot for Head TSL

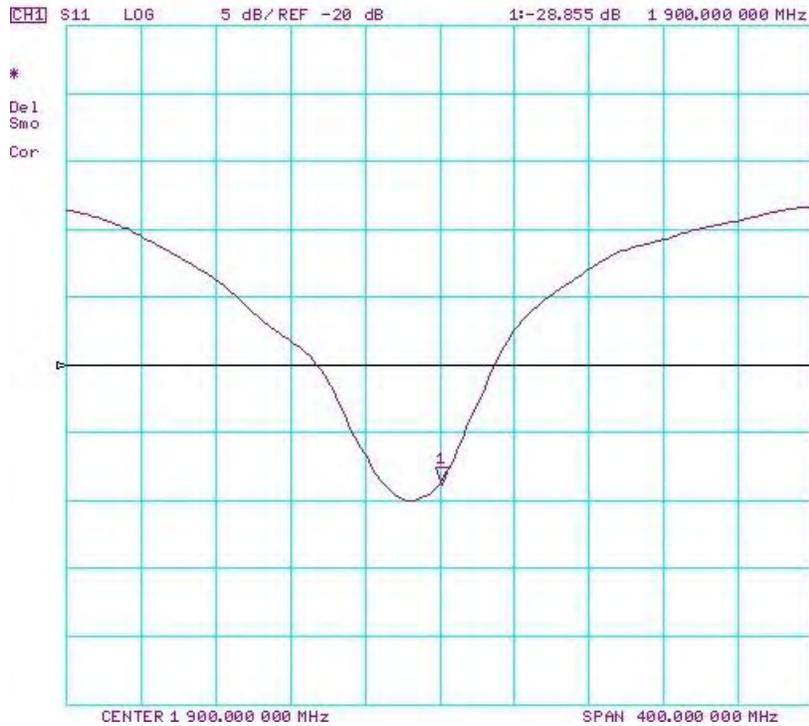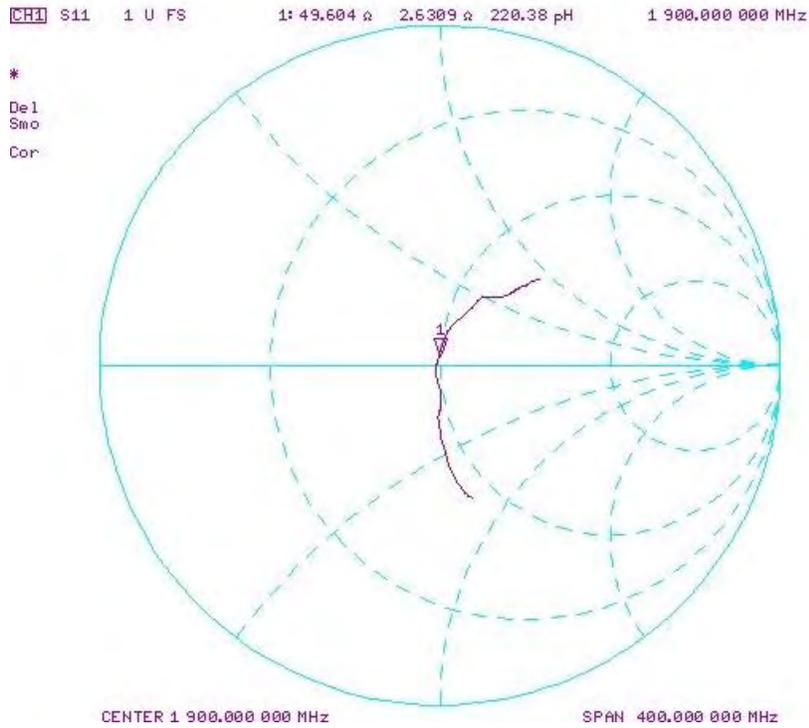

Impedance & Return-Loss Measurement Plot for Body TSL

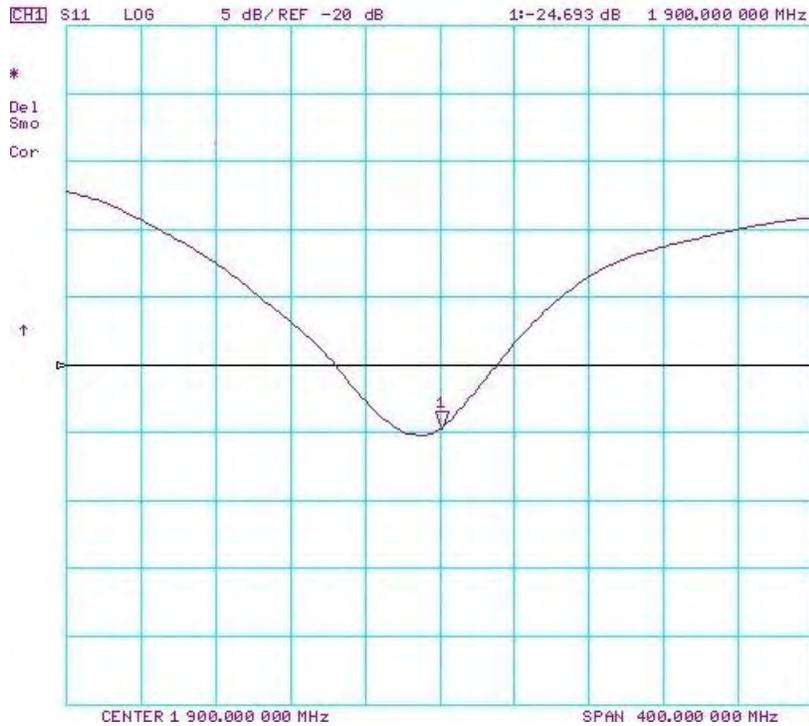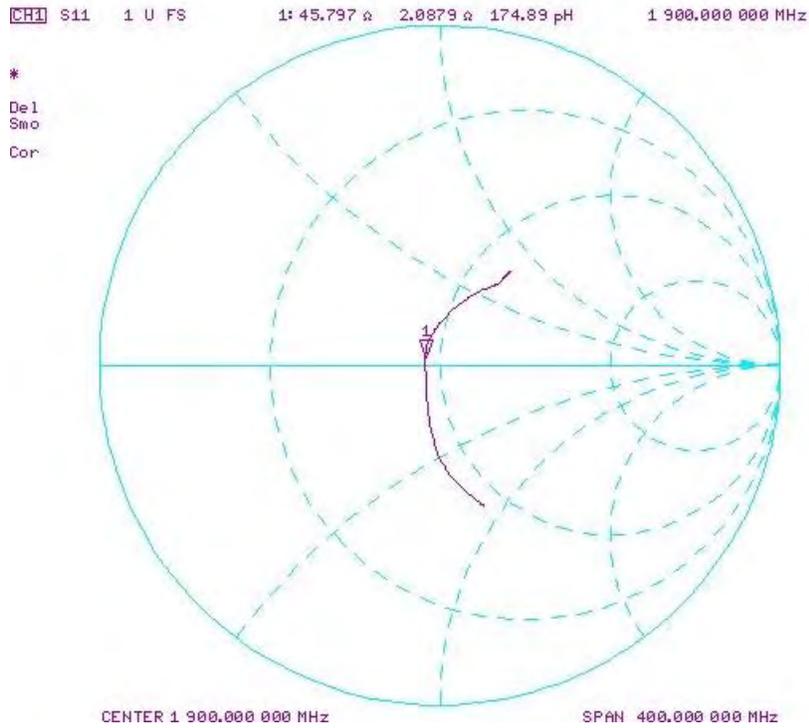



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D2450V2-750_Jun17**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN:750**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **June 07, 2017**

BNW
8/31/2017

SC ✓
6/11/2018

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	31-Dec-16 (No. EX3-7349_Dec16)	Dec-17
DAE4	SN: 601	28-Mar-17 (No. DAE4-601_Mar17)	Mar-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8401A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by: **Johannes Kurikka** Name: Johannes Kurikka Function: Laboratory Technician

Approved by: **Katja Pokovic** Name: Katja Pokovic Function: Technical Manager

Signature

Johannes Kurikka

Katja Pokovic

Issued: June 9, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	37.9 \pm 6 %	1.85 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.6 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	53.3 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.29 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.8 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	52.2 \pm 6 %	2.04 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.1 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	51.2 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.13 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	24.2 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.7 Ω + 5.8 j Ω
Return Loss	- 23.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	49.7 Ω + 6.7 j Ω
Return Loss	- 23.5 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.155 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	December 01, 2003

DASY5 Validation Report for Head TSL

Date: 07.06.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:750

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 37.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.12, 8.12, 8.12); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 113.7 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 27.9 W/kg

SAR(1 g) = 13.6 W/kg; SAR(10 g) = 6.29 W/kg

Maximum value of SAR (measured) = 22.0 W/kg

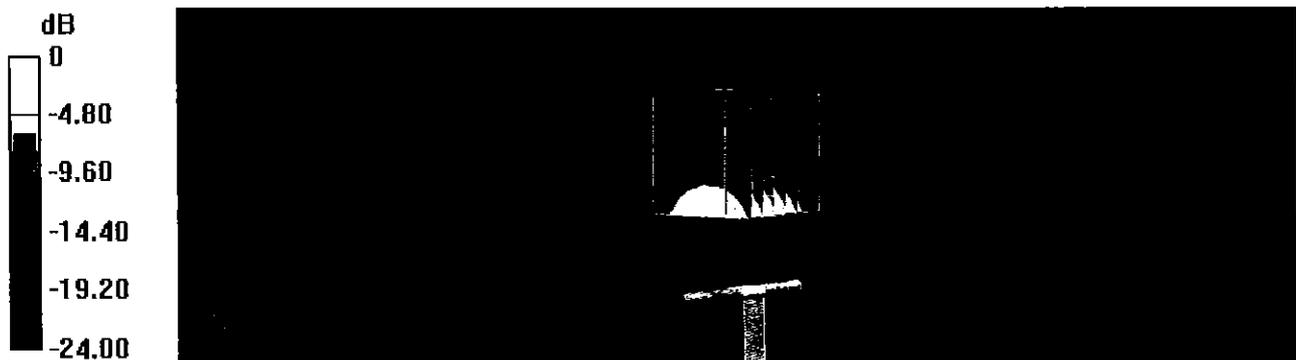


0 dB = 22.0 W/kg = 13.42 dBW/kg

Impedance Measurement Plot for Head TSL

7 Jun 2017 12:38:18

CH1 S11 1 U FS 1: 53.705 Ω 5.8223 Ω 378.22 pH 2 450.000 000 MHz

*
De l
CA

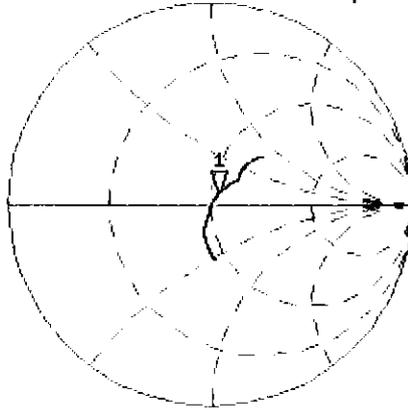

AVG
16


H1 d

CH2 S11 LOG 5 dB/REF -20 dB 1: -23.544 dB 2 450.000 000 MHz

CA

AVG
16

H1 d

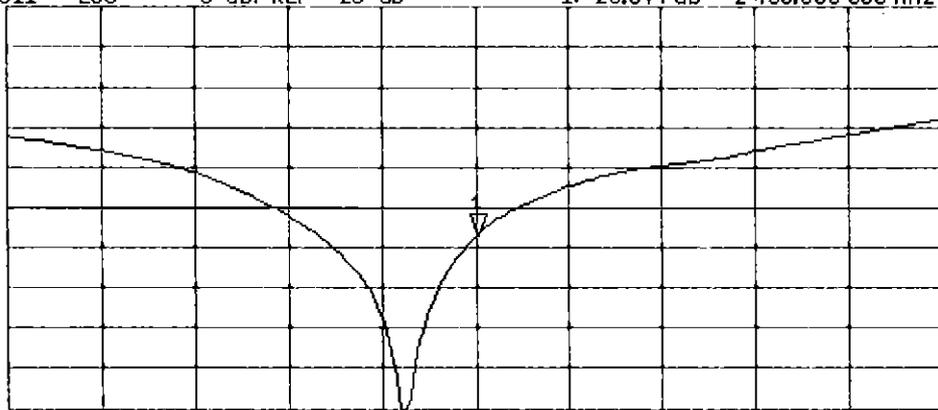

START 2 250.000 000 MHz

STOP 2 650.000 000 MHz

DASY5 Validation Report for Body TSL

Date: 07.06.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:750

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.04$ S/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.1, 8.1, 8.1); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 103.3 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 26.0 W/kg

SAR(1 g) = 13.1 W/kg; SAR(10 g) = 6.13 W/kg

Maximum value of SAR (measured) = 20.5 W/kg

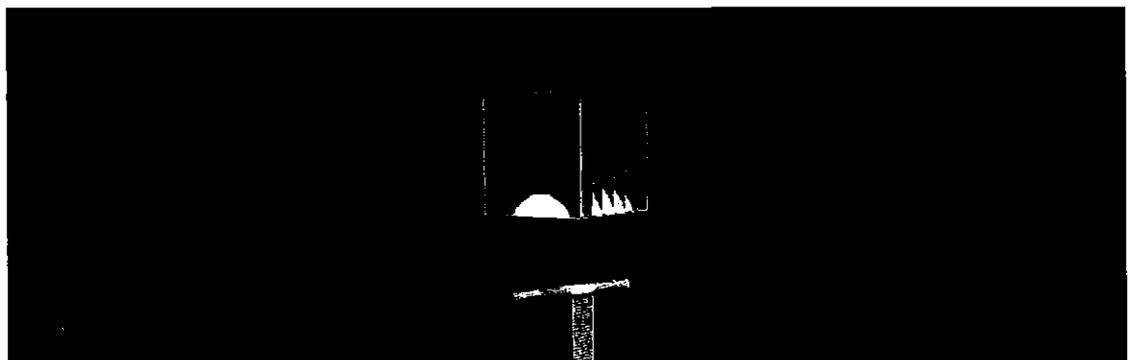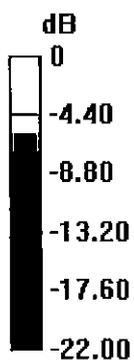

0 dB = 20.5 W/kg = 13.12 dBW/kg

Impedance Measurement Plot for Body TSL

7 Jun 2017 12:37:20


CH1 S11 1 U FS 1: 49.697 Ω 6.6563 Ω 432.40 pF 2 450.000 000 MHz

*
Del

CA

Avg
16

H1d

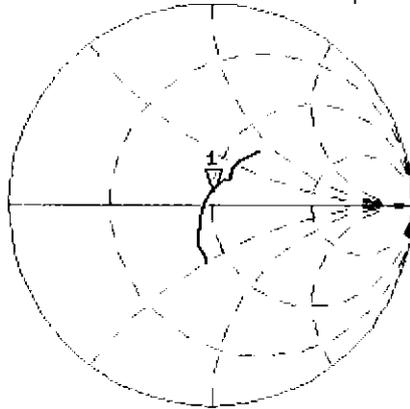


CH2 S11 LOG 5 dB/REF -20 dB 1: -23.519 dB 2 450.000 000 MHz

CA

Avg
16

H1d

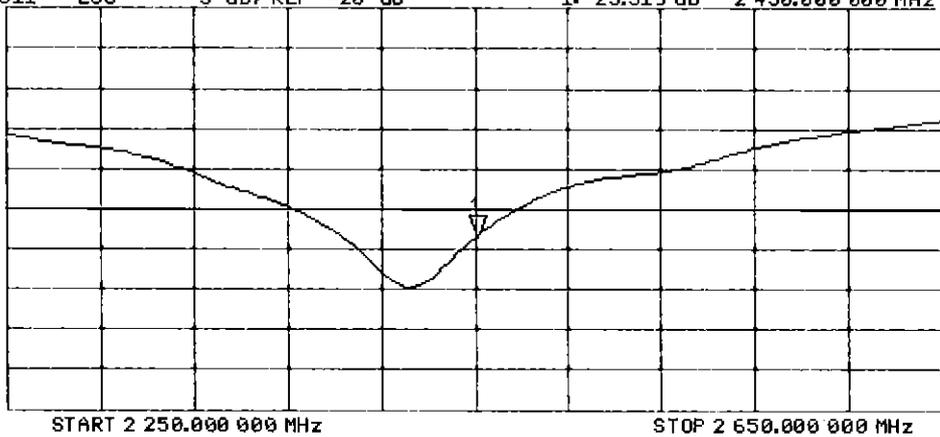

Certification of Calibration

Object D2450V2 – SN: 750

Calibration procedure(s) Procedure for Calibration Extension for SAR Dipoles.


Extended Calibration date: June 01, 2018

Description: SAR Validation Dipole at 2450 MHz.

Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8753ES	S-Parameter Network Analyzer	9/14/2017	Annual	9/14/2018	US39170118
Agilent	N5182A	MXG Vector Signal Generator	3/19/2018	Annual	3/19/2019	US46240505
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	343972
Anritsu	ML2496A	Power Meter	10/9/2017	Annual	10/9/2018	1138001
Anritsu	MA2411B	Pulse Power Sensor	11/15/2017	Annual	11/15/2018	1339007
Anritsu	MA2411B	Pulse Power Sensor	11/22/2017	Annual	11/22/2018	1339008
Control Company	4040	Temperature / Humidity Monitor	2/28/2018	Biennial	2/28/2020	150761911
Control Company	4352	Ultra Long Stem Thermometer	2/14/2017	Biennial	2/14/2019	170112507
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/1/2017	Annual	6/1/2018	MY53401181
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
SPEAG	DAKS-3.5	Portable DAK	9/5/2017	Annual	9/5/2018	1045
SPEAG	ES3DV3	SAR Probe	3/13/2018	Annual	3/13/2019	3131
SPEAG	EX3DV4	SAR Probe	1/26/2018	Annual	1/26/2019	7490
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/7/2018	Annual	3/7/2019	604
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/26/2018	Annual	1/26/2019	1532

Measurement Uncertainty = $\pm 23\%$ (k=2)

	Name	Function	Signature
Calibrated By:	Sangmin Cha	Biomedical Engineer II	
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	

DIPOLE CALIBRATION EXTENSION

Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:



1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.

The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:



Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) W/kg @ 20.0 dBm	Measured Head SAR (1g) W/kg @ 20.0 dBm	Deviation 1g (%)	Certificate SAR Target Head (10g) W/kg @ 20.0 dBm	Measured Head SAR (10g) W/kg @ 20.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
6/7/2017	6/1/2018	1.155	5.33	5.54	3.94%	2.48	2.51	1.21%	53.7	50.4	3.3	5.8	5.1	0.7	-23.5	-25	-6.40%	PASS

Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) W/kg @ 20.0 dBm	Measured Body SAR (1g) W/kg @ 20.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 20.0 dBm	Measured Body SAR (10g) W/kg @ 20.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
6/7/2017	6/1/2018	1.155	5.12	4.9	-4.30%	2.42	2.23	-7.85%	49.7	46.1	3.6	6.7	2.8	3.9	-23.5	-24.5	-4.30%	PASS

Impedance & Return-Loss Measurement Plot for Head TSL

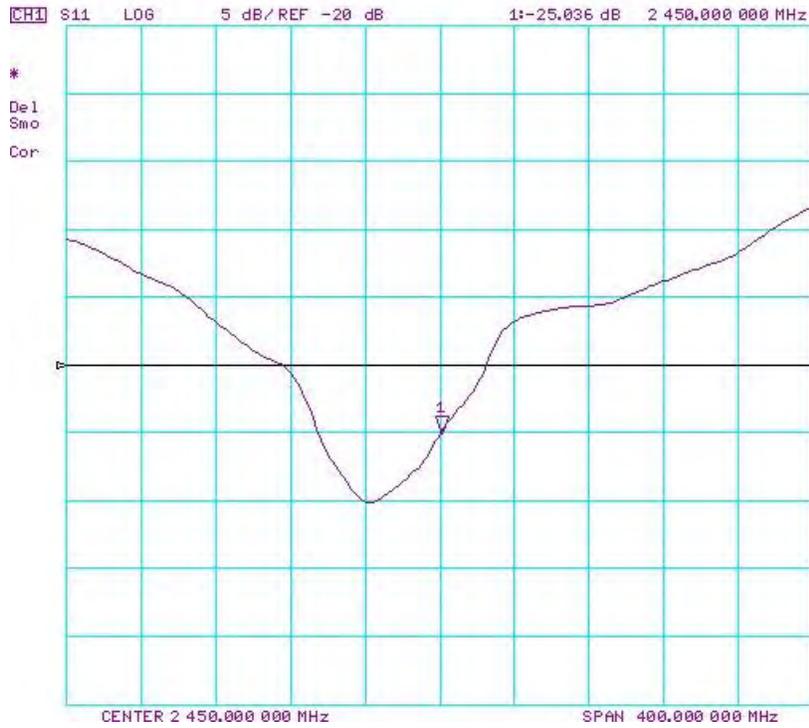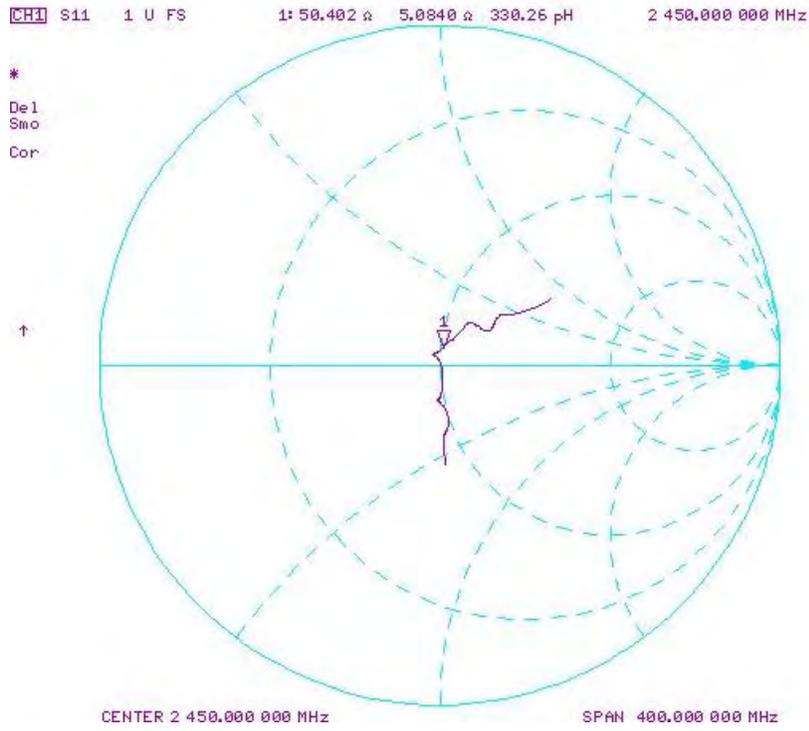

Impedance & Return-Loss Measurement Plot for Body TSL

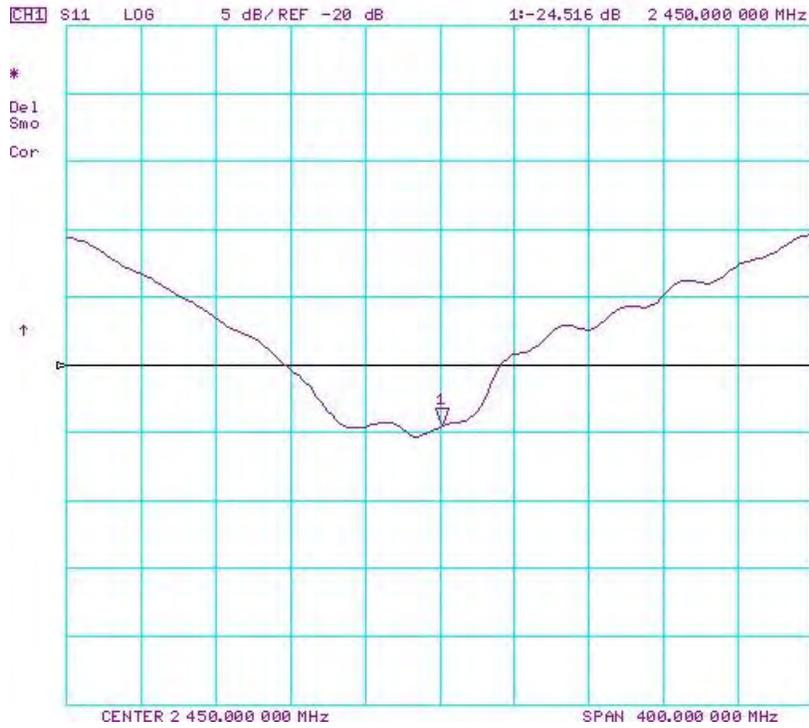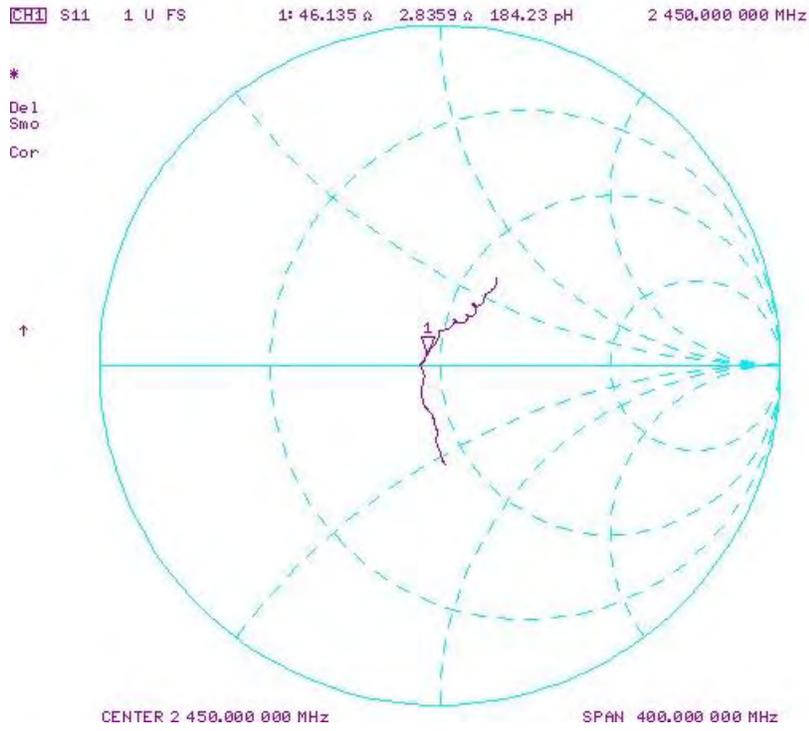



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D2450V2-945_May18**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN:945**

Calibration procedure(s) **QA CAL-05.v10
Calibration procedure for dipole validation kits above 700 MHz**

SCV
5/31/2018

Calibration date: **May 16, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-18 (No. 217-02682)	Apr-19
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-18 (No. 217-02683)	Apr-19
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by: **Manu Seltz** Function: **Laboratory Technician** Signature: *[Signature]*

Approved by: **Katja Pokovic** Technical Manager *[Signature]*

Issued: May 17, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.1
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	38.2 ± 6 %	1.85 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.0 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	51.0 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.02 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.8 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.3 ± 6 %	1.99 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.5 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	49.4 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.83 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.2 W/kg ± 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	56.1 Ω + 3.7 j Ω
Return Loss	- 23.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	51.9 Ω + 5.0 j Ω
Return Loss	- 25.7 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.157 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 15, 2014

DASY5 Validation Report for Head TSL

Date: 16.05.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:945

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.88, 7.88, 7.88) @ 2450 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 114.8 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 25.9 W/kg

SAR(1 g) = 13 W/kg; SAR(10 g) = 6.02 W/kg

Maximum value of SAR (measured) = 21.4 W/kg

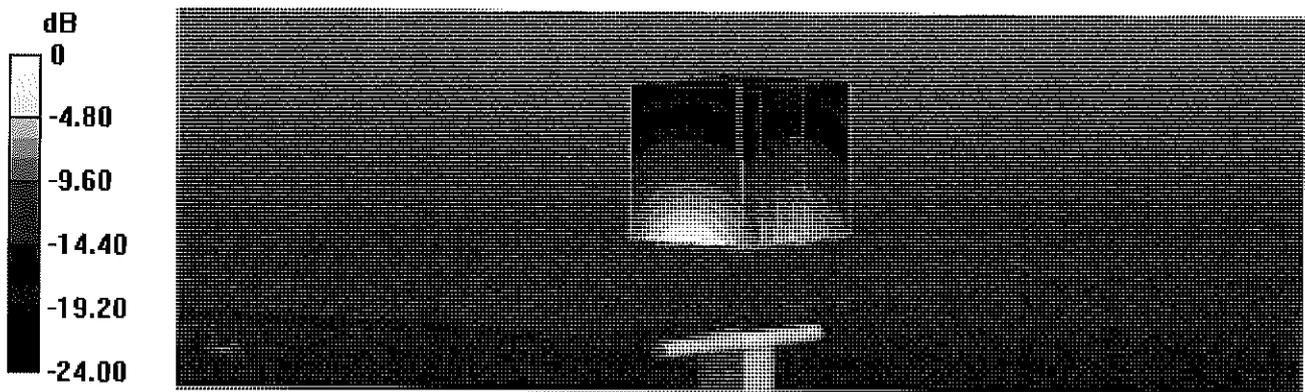


0 dB = 21.4 W/kg = 13.30 dBW/kg

Impedance Measurement Plot for Head TSL

16 May 2018 12:05:05


[CH1] S11 1 U FS 1: 56.092 Ω 3.7012 Ω 240.43 μ H 2 450.000 000 MHz

*
Del
CA
Avg
16
H1d

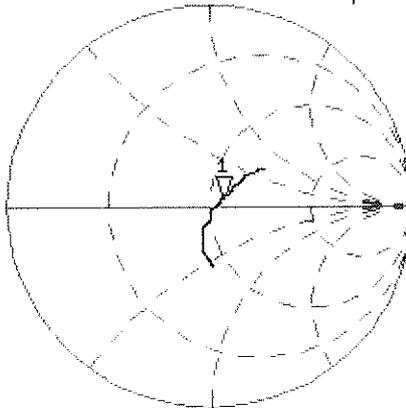

CH2 S11 LOG 5 dB/REF -20 dB 1: -23.462 dB 2 450.000 000 MHz

CA
Avg
16
H1d

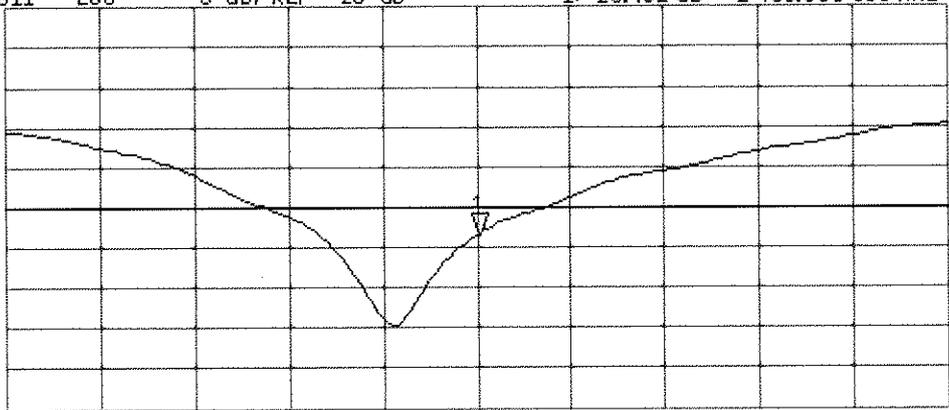

START 2 250.000 000 MHz

STOP 2 650.000 000 MHz

DASY5 Validation Report for Body TSL

Date: 16.05.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:945

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.99$ S/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.01, 8.01, 8.01) @ 2450 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 106.8 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 25.0 W/kg

SAR(1 g) = 12.5 W/kg; SAR(10 g) = 5.83 W/kg


Maximum value of SAR (measured) = 20.2 W/kg

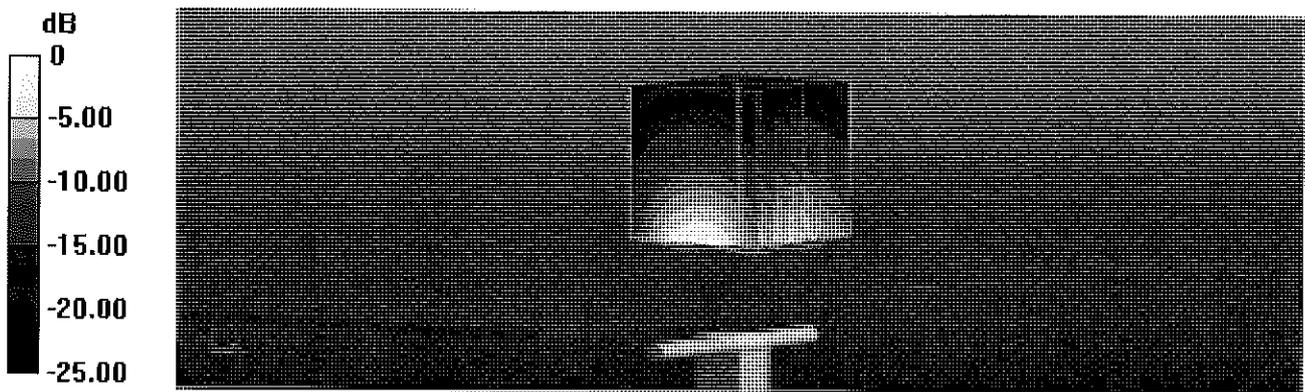


Impedance Measurement Plot for Body TSL

16 May 2018 12:03:43
[CH1] S11 1 U FS 1: 51.910 Ω 4.9629 Ω 322.40 μ H 2 450.000 000 MHz

*
De1
CA
Avg
16
H1d

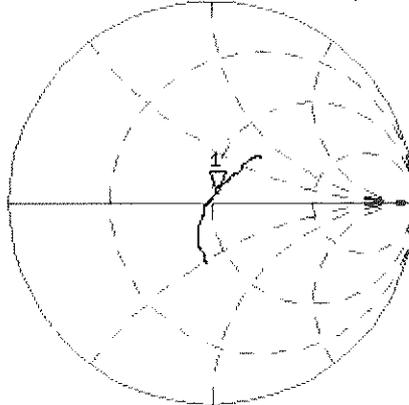

CH2 S11 LOG 5 dB/REF -20 dB 1: -25.659 dB 2 450.000 000 MHz

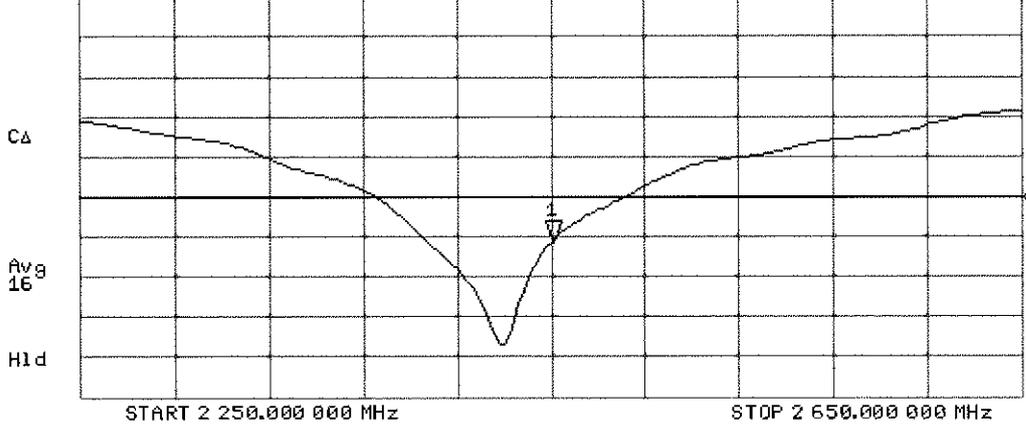



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **EX3-7491_Jul18**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:7491**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6
Calibration procedure for dosimetric E-field probes**

Calibration date: **July 20, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

*SC ✓
8/2/2018*

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-18 (No. 217-02682)	Apr-19
Reference Probe ES3DV2	SN: 3013	30-Dec-17 (No. ES3-3013_Dec17)	Dec-18
DAE4	SN: 660	21-Dec-17 (No. DAE4-660_Dec17)	Dec-18
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-18)	In house check: Jun-20
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-17)	In house check: Oct-18

Calibrated by: **Name: Michael Weber, Function: Laboratory Technician, Signature: [Handwritten Signature]**

Approved by: **Name: Kalja Pokovic, Function: Technical Manager, Signature: [Handwritten Signature]**

Issued: July 23, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- *NORM_{x,y,z}*: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). *NORM_{x,y,z}* are only intermediate values, i.e., the uncertainties of *NORM_{x,y,z}* does not affect the E^2 -field uncertainty inside TSL (see below *ConvF*).
- *NORM(f)_{x,y,z}* = *NORM_{x,y,z}* * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- *DCP_{x,y,z}*: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- *PAR*: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- *A_{x,y,z}*; *B_{x,y,z}*; *C_{x,y,z}*; *D_{x,y,z}*; *VR_{x,y,z}*; *A, B, C, D* are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. *VR* is the maximum calibration range expressed in RMS voltage across the diode.
- *ConvF* and *Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to *NORM_{x,y,z}* * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- *Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- *Connector Angle*: The angle is assessed using the information gained by determining the *NORM_x* (no uncertainty required).

Probe EX3DV4

SN:7491

Manufactured:	March 20, 2017
Repaired:	July 10, 2018
Calibrated:	July 20, 2018

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7491

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.56	0.55	0.49	$\pm 10.1\%$
DCP (mV) ^B	99.1	99.7	100.8	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	150.4	$\pm 3.3\%$
		Y	0.0	0.0	1.0		146.8	
		Z	0.0	0.0	1.0		158.3	

Note: For details on UID parameters see Appendix.

Sensor Model Parameters

	C1 fF	C2 fF	α V^{-1}	T1 $\text{ms}\cdot\text{V}^{-2}$	T2 $\text{ms}\cdot\text{V}^{-1}$	T3 ms	T4 V^{-2}	T5 V^{-1}	T6
X	35.21	264.2	36.02	7.203	0.000	5.028	1.076	0.208	1.005
Y	43.10	332.1	37.48	6.569	0.184	5.070	0.501	0.436	1.008
Z	32.15	239.5	35.45	5.491	0.000	5.007	0.859	0.176	1.004

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7491

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	41.9	0.89	10.48	10.48	10.48	0.55	0.85	± 12.0 %
835	41.5	0.90	10.10	10.10	10.10	0.53	0.80	± 12.0 %
1750	40.1	1.37	8.81	8.81	8.81	0.36	0.80	± 12.0 %
1900	40.0	1.40	8.48	8.48	8.48	0.30	0.87	± 12.0 %
2300	39.5	1.67	8.12	8.12	8.12	0.25	0.90	± 12.0 %
2450	39.2	1.80	7.67	7.67	7.67	0.33	0.84	± 12.0 %
2600	39.0	1.96	7.52	7.52	7.52	0.30	0.88	± 12.0 %
5250	35.9	4.71	5.62	5.62	5.62	0.40	1.80	± 13.1 %
5600	35.5	5.07	5.05	5.05	5.05	0.40	1.80	± 13.1 %
5750	35.4	5.22	5.27	5.27	5.27	0.40	1.80	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7491

Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) ^c	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	55.5	0.96	10.60	10.60	10.60	0.35	0.97	± 12.0 %
835	55.2	0.97	10.30	10.30	10.30	0.41	0.86	± 12.0 %
1750	53.4	1.49	8.55	8.55	8.55	0.35	0.87	± 12.0 %
1900	53.3	1.52	8.19	8.19	8.19	0.36	0.85	± 12.0 %
2300	52.9	1.81	7.91	7.91	7.91	0.34	0.87	± 12.0 %
2450	52.7	1.95	7.74	7.74	7.74	0.34	0.85	± 12.0 %
2600	52.5	2.16	7.44	7.44	7.44	0.25	0.92	± 12.0 %
5250	48.9	5.36	4.82	4.82	4.82	0.50	1.90	± 13.1 %
5600	48.5	5.77	4.19	4.19	4.19	0.50	1.90	± 13.1 %
5750	48.3	5.94	4.37	4.37	4.37	0.50	1.90	± 13.1 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.


Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

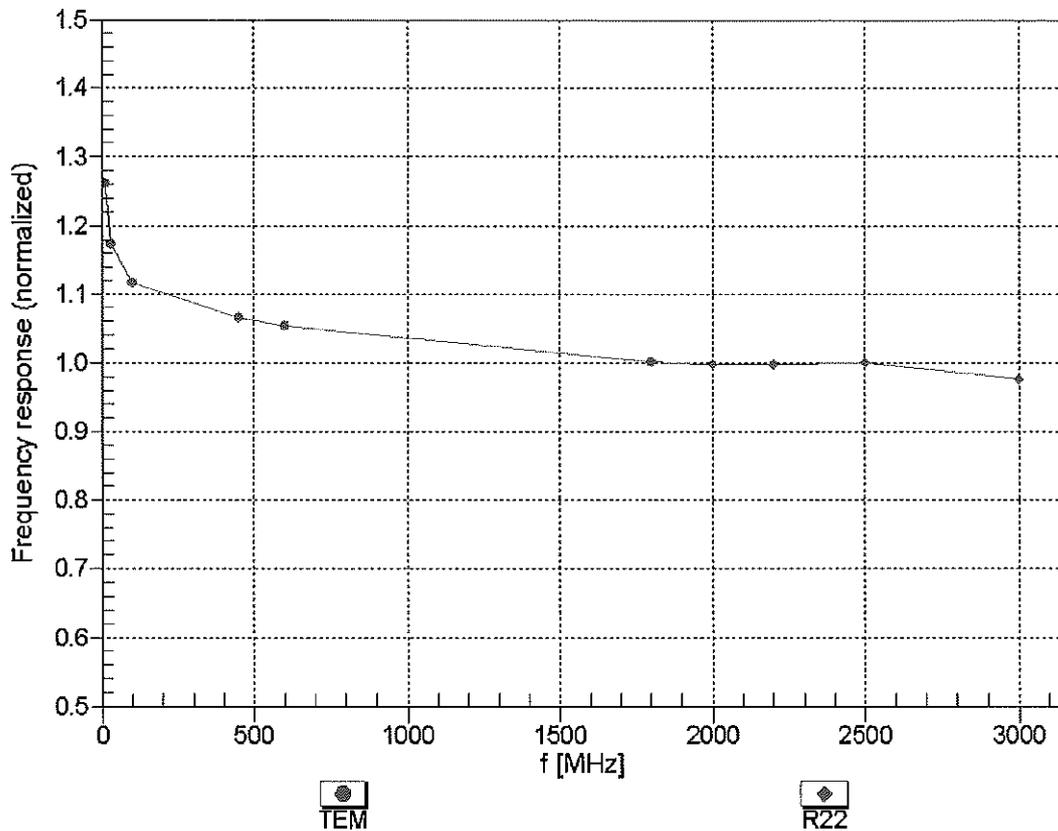



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

f=600 MHz,TEM


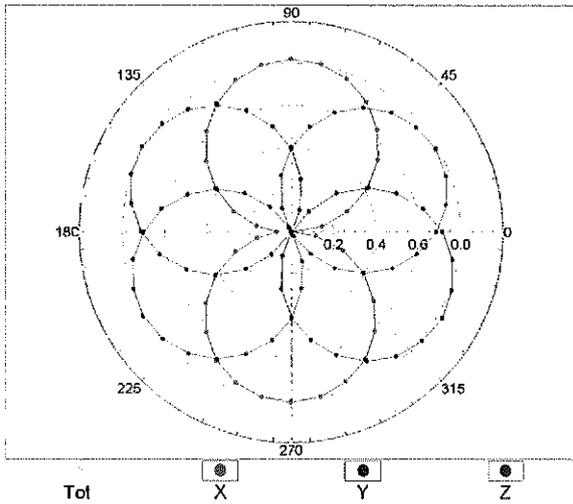


f=1800 MHz,R22

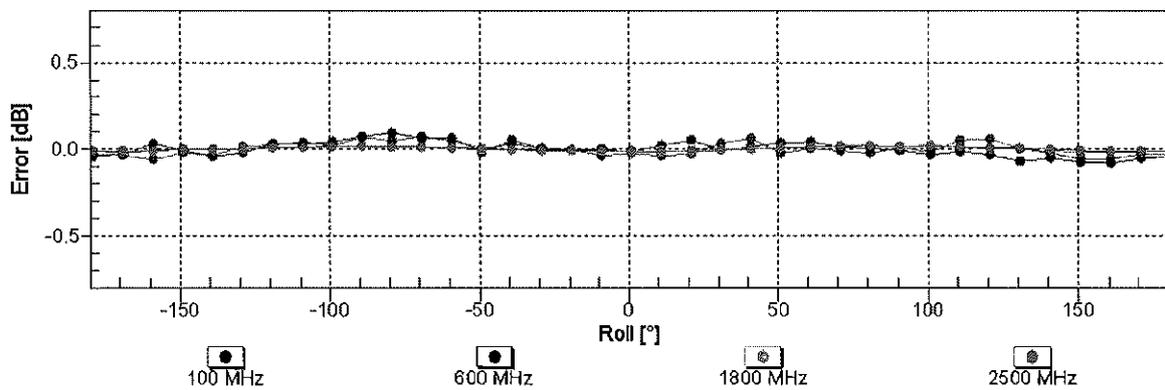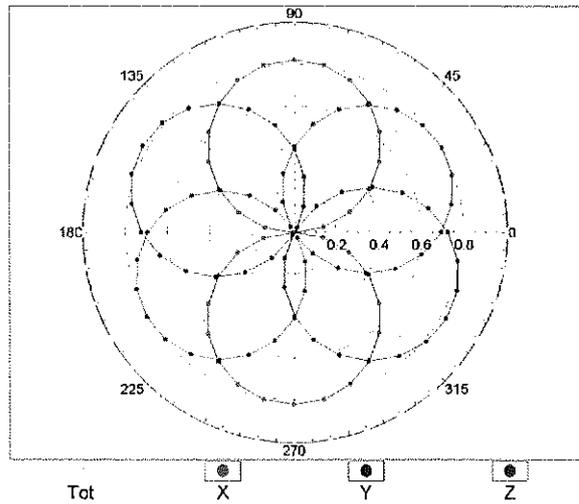


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

Dynamic Range f(SAR_{head}) (TEM cell , f_{eval}= 1900 MHz)

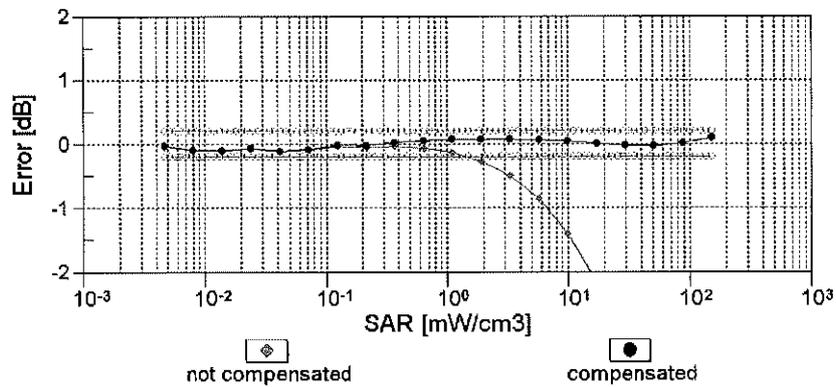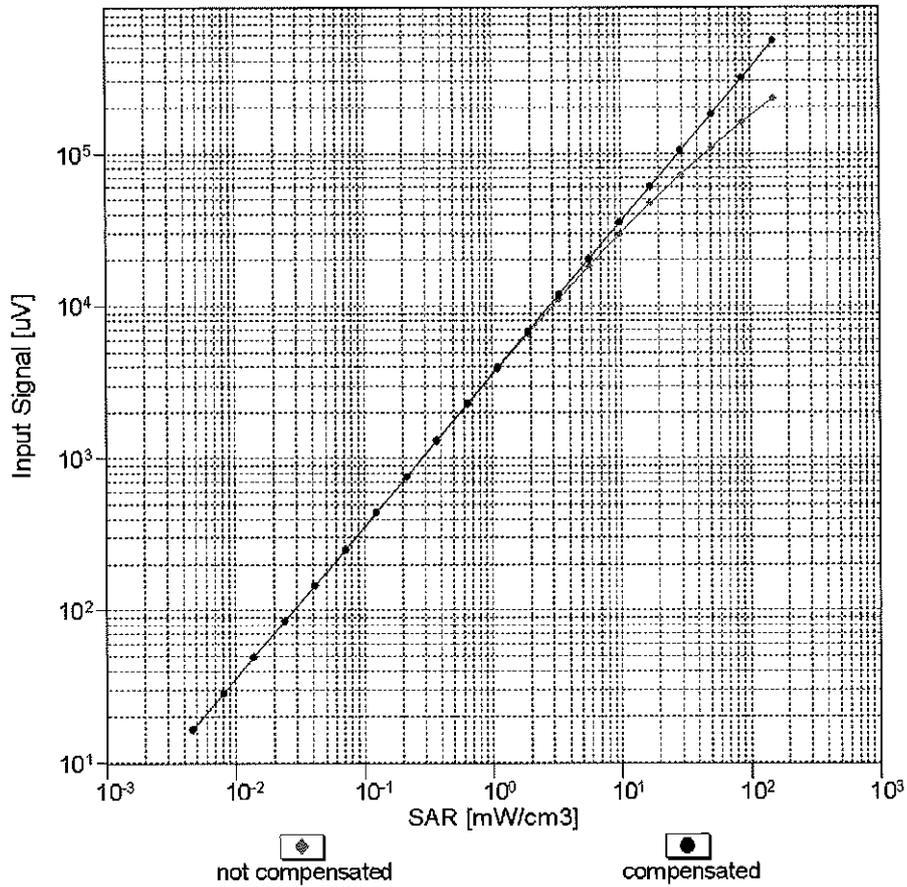



Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Conversion Factor Assessment

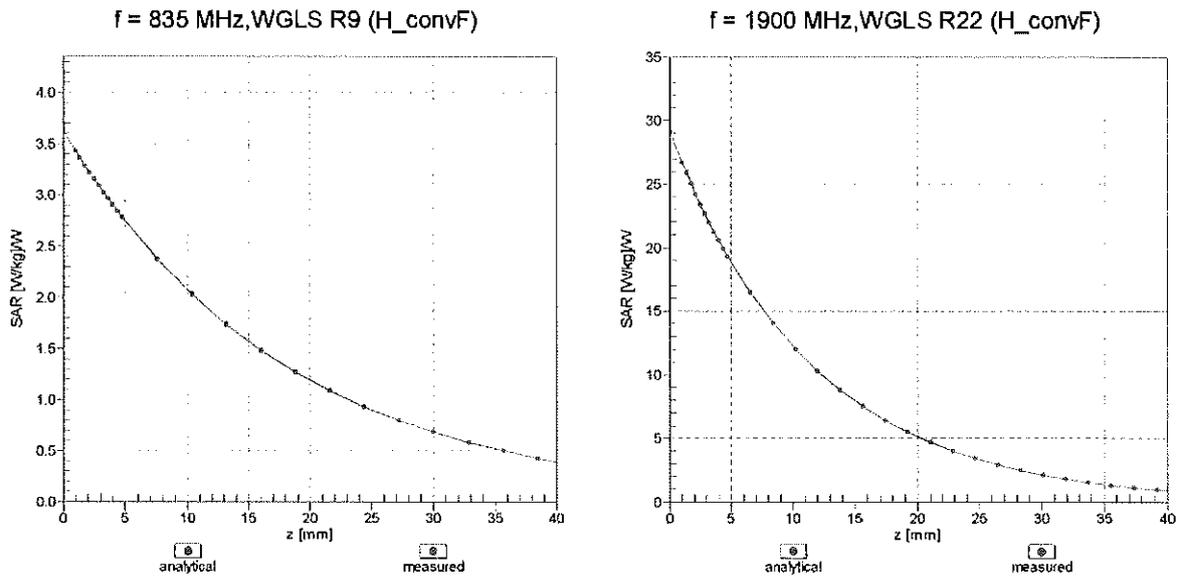

Deviation from Isotropy in Liquid

Error (ϕ, θ), f = 900 MHz

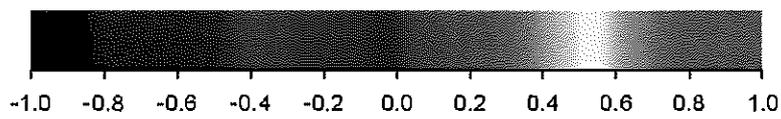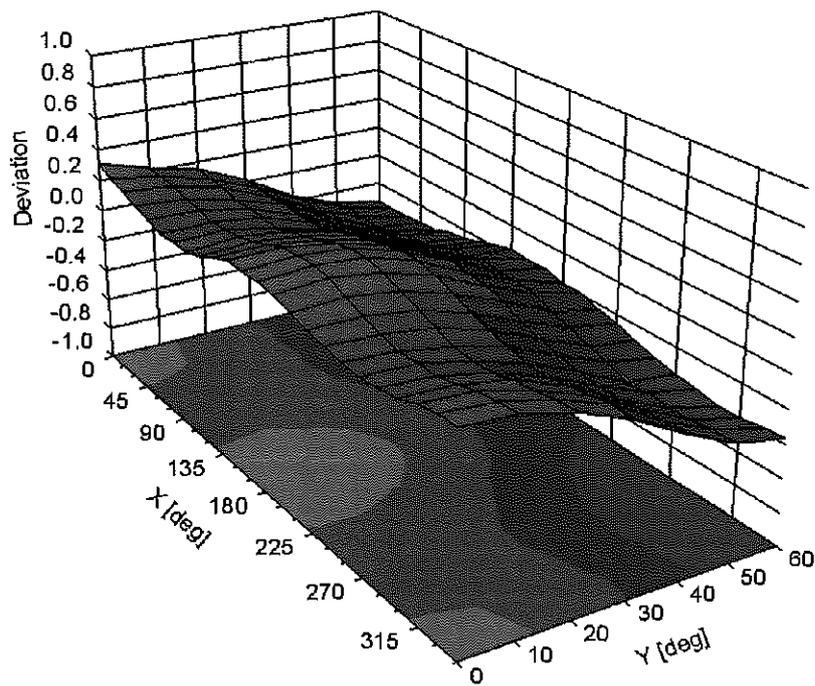

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ (k=2)

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7491

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	110.9
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Appendix: Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB/μV	C	D dB	VR mV	Max Unc ^E (k=2)
0	CW	X	0.00	0.00	1.00	0.00	150.4	± 3.3 %
		Y	0.00	0.00	1.00		146.8	
		Z	0.00	0.00	1.00		158.3	
10010- CAA	SAR Validation (Square, 100ms, 10ms)	X	1.34	61.83	7.07	10.00	20.0	± 9.6 %
		Y	1.58	62.93	8.08		20.0	
		Z	1.36	61.75	7.02		20.0	
10011- CAB	UMTS-FDD (WCDMA)	X	1.10	69.86	16.50	0.00	150.0	± 9.6 %
		Y	0.84	64.59	13.11		150.0	
		Z	0.95	67.18	14.87		150.0	
10012- CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	X	1.13	64.17	15.58	0.41	150.0	± 9.6 %
		Y	1.05	62.41	14.09		150.0	
		Z	1.10	63.39	14.82		150.0	
10013- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	X	4.65	66.79	17.11	1.46	150.0	± 9.6 %
		Y	4.73	66.33	16.86		150.0	
		Z	4.57	66.64	16.86		150.0	
10021- DAC	GSM-FDD (TDMA, GMSK)	X	100.00	103.89	21.71	9.39	50.0	± 9.6 %
		Y	100.00	108.73	24.23		50.0	
		Z	26.33	90.02	18.11		50.0	
10023- DAC	GPRS-FDD (TDMA, GMSK, TN 0)	X	100.00	103.35	21.52	9.57	50.0	± 9.6 %
		Y	100.00	108.19	24.05		50.0	
		Z	8.05	78.49	14.82		50.0	
10024- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	X	100.00	103.76	20.63	6.56	60.0	± 9.6 %
		Y	100.00	108.89	23.12		60.0	
		Z	100.00	101.52	19.56		60.0	
10025- DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	X	7.71	95.52	39.83	12.57	50.0	± 9.6 %
		Y	3.82	69.58	26.35		50.0	
		Z	5.34	82.06	33.11		50.0	
10026- DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	X	6.67	89.14	32.86	9.56	60.0	± 9.6 %
		Y	6.11	84.79	30.60		60.0	
		Z	5.40	83.14	30.03		60.0	
10027- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	X	100.00	105.72	20.77	4.80	80.0	± 9.6 %
		Y	100.00	109.47	22.55		80.0	
		Z	100.00	102.59	19.31		80.0	
10028- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	X	100.00	109.66	21.79	3.55	100.0	± 9.6 %
		Y	100.00	109.26	21.76		100.0	
		Z	100.00	105.24	19.82		100.0	
10029- DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	X	4.10	76.83	26.30	7.80	80.0	± 9.6 %
		Y	4.05	75.26	25.26		80.0	
		Z	3.61	73.61	24.52		80.0	
10030- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	X	100.00	101.83	19.37	5.30	70.0	± 9.6 %
		Y	100.00	106.78	21.72		70.0	
		Z	100.00	99.08	18.07		70.0	
10031- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	X	100.00	99.29	16.49	1.88	100.0	± 9.6 %
		Y	0.43	63.88	6.46		100.0	
		Z	100.00	95.02	14.71		100.0	

10032-CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	X	100.00	103.35	17.34	1.17	100.0	± 9.6 %
		Y	0.14	60.00	3.51		100.0	
		Z	100.00	98.56	15.49		100.0	
10033-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	X	15.94	99.69	25.70	5.30	70.0	± 9.6 %
		Y	8.86	93.04	24.94		70.0	
		Z	4.54	80.85	19.18		70.0	
10034-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	X	2.96	77.85	17.14	1.88	100.0	± 9.6 %
		Y	1.73	70.99	15.19		100.0	
		Z	1.45	68.86	12.96		100.0	
10035-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	X	1.93	73.49	15.25	1.17	100.0	± 9.6 %
		Y	1.24	67.47	13.23		100.0	
		Z	1.14	67.01	11.91		100.0	
10036-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	X	33.38	110.64	28.65	5.30	70.0	± 9.6 %
		Y	14.03	100.51	27.24		70.0	
		Z	5.92	84.73	20.56		70.0	
10037-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	X	2.49	75.90	16.43	1.88	100.0	± 9.6 %
		Y	1.61	70.25	14.86		100.0	
		Z	1.32	67.93	12.55		100.0	
10038-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	X	1.97	74.03	15.61	1.17	100.0	± 9.6 %
		Y	1.24	67.69	13.45		100.0	
		Z	1.14	67.23	12.15		100.0	
10039-CAB	CDMA2000 (1xRTT, RC1)	X	1.69	72.14	14.31	0.00	150.0	± 9.6 %
		Y	1.13	65.88	11.78		150.0	
		Z	1.05	66.64	11.42		150.0	
10042-CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	X	99.80	100.56	19.56	7.78	50.0	± 9.6 %
		Y	100.00	104.61	21.59		50.0	
		Z	2.99	70.61	11.28		50.0	
10044-CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	X	0.00	110.68	3.82	0.00	150.0	± 9.6 %
		Y	0.02	125.31	15.46		150.0	
		Z	0.00	100.18	3.88		150.0	
10048-CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	X	5.03	70.28	13.19	13.80	25.0	± 9.6 %
		Y	19.60	86.32	19.47		25.0	
		Z	3.96	67.14	11.88		25.0	
10049-CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	X	6.28	75.19	13.99	10.79	40.0	± 9.6 %
		Y	49.36	98.98	21.95		40.0	
		Z	4.01	70.23	12.03		40.0	
10056-CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	X	100.00	119.24	30.27	9.03	50.0	± 9.6 %
		Y	79.13	119.42	31.62		50.0	
		Z	21.35	96.00	23.74		50.0	
10058-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	X	3.32	72.42	23.38	6.55	100.0	± 9.6 %
		Y	3.31	71.39	22.62		100.0	
		Z	3.02	70.13	22.02		100.0	
10059-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	X	1.13	65.02	16.09	0.61	110.0	± 9.6 %
		Y	1.05	63.09	14.54		110.0	
		Z	1.09	63.96	15.16		110.0	
10060-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	X	100.00	146.09	38.55	1.30	110.0	± 9.6 %
		Y	2.18	83.07	21.15		110.0	
		Z	2.56	86.95	23.01		110.0	

10061-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	X	2.12	78.72	22.19	2.04	110.0	± 9.6 %
		Y	1.64	72.98	19.41		110.0	
		Z	1.52	72.27	19.03		110.0	
10062-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	X	4.48	66.83	16.57	0.49	100.0	± 9.6 %
		Y	4.53	66.30	16.26		100.0	
		Z	4.39	66.67	16.33		100.0	
10063-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	X	4.48	66.91	16.66	0.72	100.0	± 9.6 %
		Y	4.54	66.38	16.35		100.0	
		Z	4.40	66.74	16.41		100.0	
10064-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)	X	4.72	67.10	16.85	0.86	100.0	± 9.6 %
		Y	4.82	66.65	16.60		100.0	
		Z	4.63	66.92	16.60		100.0	
10065-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	X	4.58	66.91	16.91	1.21	100.0	± 9.6 %
		Y	4.68	66.51	16.69		100.0	
		Z	4.49	66.71	16.64		100.0	
10066-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	X	4.59	66.89	17.05	1.46	100.0	± 9.6 %
		Y	4.69	66.53	16.86		100.0	
		Z	4.49	66.66	16.76		100.0	
10067-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	X	4.87	67.15	17.52	2.04	100.0	± 9.6 %
		Y	4.98	66.75	17.34		100.0	
		Z	4.76	66.93	17.23		100.0	
10068-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	X	4.88	67.02	17.67	2.55	100.0	± 9.6 %
		Y	5.01	66.72	17.53		100.0	
		Z	4.78	66.80	17.37		100.0	
10069-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	X	4.94	67.05	17.86	2.67	100.0	± 9.6 %
		Y	5.09	66.76	17.74		100.0	
		Z	4.83	66.81	17.55		100.0	
10071-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	X	4.73	66.83	17.38	1.99	100.0	± 9.6 %
		Y	4.81	66.40	17.17		100.0	
		Z	4.65	66.66	17.13		100.0	
10072-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	X	4.68	67.04	17.56	2.30	100.0	± 9.6 %
		Y	4.77	66.65	17.36		100.0	
		Z	4.58	66.82	17.27		100.0	
10073-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	X	4.72	67.18	17.88	2.83	100.0	± 9.6 %
		Y	4.81	66.77	17.68		100.0	
		Z	4.63	66.96	17.58		100.0	
10074-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	X	4.71	67.08	18.01	3.30	100.0	± 9.6 %
		Y	4.79	66.64	17.82		100.0	
		Z	4.63	66.89	17.72		100.0	
10075-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	X	4.72	67.05	18.25	3.82	90.0	± 9.6 %
		Y	4.81	66.68	18.10		90.0	
		Z	4.63	66.84	17.94		90.0	
10076-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	X	4.75	66.90	18.41	4.15	90.0	± 9.6 %
		Y	4.82	66.48	18.23		90.0	
		Z	4.67	66.71	18.11		90.0	
10077-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	X	4.77	66.98	18.52	4.30	90.0	± 9.6 %
		Y	4.85	66.54	18.33		90.0	
		Z	4.69	66.79	18.22		90.0	

10081-CAB	CDMA2000 (1xRTT, RC3)	X	0.70	65.48	10.90	0.00	150.0	± 9.6 %
		Y	0.59	62.19	9.27		150.0	
		Z	0.55	62.91	9.10		150.0	
10082-CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	X	0.63	60.00	2.84	4.77	80.0	± 9.6 %
		Y	0.58	60.00	3.13		80.0	
		Z	20.99	63.47	2.92		80.0	
10090-DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	X	100.00	103.79	20.66	6.56	60.0	± 9.6 %
		Y	100.00	109.00	23.19		60.0	
		Z	100.00	101.52	19.57		60.0	
10097-CAB	UMTS-FDD (HSDPA)	X	1.91	69.67	16.36	0.00	150.0	± 9.6 %
		Y	1.62	65.97	14.31		150.0	
		Z	1.77	68.37	15.43		150.0	
10098-CAB	UMTS-FDD (HSUPA, Subtest 2)	X	1.88	69.64	16.36	0.00	150.0	± 9.6 %
		Y	1.59	65.90	14.26		150.0	
		Z	1.73	68.31	15.40		150.0	
10099-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	X	6.73	89.36	32.94	9.56	60.0	± 9.6 %
		Y	6.15	84.95	30.66		60.0	
		Z	5.44	83.31	30.09		60.0	
10100-CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	3.08	70.94	17.19	0.00	150.0	± 9.6 %
		Y	2.81	68.58	15.67		150.0	
		Z	2.88	69.85	16.58		150.0	
10101-CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	3.13	67.76	16.16	0.00	150.0	± 9.6 %
		Y	3.05	66.58	15.31		150.0	
		Z	3.04	67.27	15.79		150.0	
10102-CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	3.23	67.73	16.24	0.00	150.0	± 9.6 %
		Y	3.16	66.61	15.44		150.0	
		Z	3.14	67.29	15.89		150.0	
10103-CAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	5.24	74.74	20.38	3.98	65.0	± 9.6 %
		Y	4.97	72.97	19.57		65.0	
		Z	4.85	73.48	19.68		65.0	
10104-CAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	5.14	72.01	19.90	3.98	65.0	± 9.6 %
		Y	5.15	71.24	19.54		65.0	
		Z	4.80	70.82	19.17		65.0	
10105-CAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	4.94	70.96	19.71	3.98	65.0	± 9.6 %
		Y	4.80	69.63	19.08		65.0	
		Z	4.76	70.37	19.26		65.0	
10108-CAF	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	2.66	70.35	17.07	0.00	150.0	± 9.6 %
		Y	2.44	67.86	15.47		150.0	
		Z	2.48	69.23	16.39		150.0	
10109-CAF	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	2.78	67.82	16.07	0.00	150.0	± 9.6 %
		Y	2.70	66.35	15.10		150.0	
		Z	2.68	67.26	15.62		150.0	
10110-CAF	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	2.15	69.80	16.67	0.00	150.0	± 9.6 %
		Y	1.95	66.88	14.89		150.0	
		Z	1.97	68.48	15.81		150.0	
10111-CAF	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	2.56	69.31	16.42	0.00	150.0	± 9.6 %
		Y	2.37	66.90	15.11		150.0	
		Z	2.41	68.50	15.76		150.0	

10112-CAF	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	2.91	67.86	16.13	0.00	150.0	± 9.6 %
		Y	2.82	66.42	15.21		150.0	
		Z	2.81	67.36	15.70		150.0	
10113-CAF	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	2.70	69.44	16.52	0.00	150.0	± 9.6 %
		Y	2.52	67.13	15.30		150.0	
		Z	2.55	68.68	15.89		150.0	
10114-CAC	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	X	4.96	67.25	16.56	0.00	150.0	± 9.6 %
		Y	5.01	66.84	16.22		150.0	
		Z	4.89	67.13	16.39		150.0	
10115-CAC	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	X	5.20	67.30	16.58	0.00	150.0	± 9.6 %
		Y	5.27	66.93	16.28		150.0	
		Z	5.12	67.16	16.41		150.0	
10116-CAC	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	X	5.04	67.44	16.58	0.00	150.0	± 9.6 %
		Y	5.09	67.01	16.23		150.0	
		Z	4.96	67.28	16.40		150.0	
10117-CAC	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	X	4.95	67.19	16.55	0.00	150.0	± 9.6 %
		Y	4.97	66.69	16.16		150.0	
		Z	4.87	67.03	16.37		150.0	
10118-CAC	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	X	5.27	67.51	16.69	0.00	150.0	± 9.6 %
		Y	5.35	67.15	16.40		150.0	
		Z	5.19	67.35	16.51		150.0	
10119-CAC	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	X	5.04	67.44	16.59	0.00	150.0	± 9.6 %
		Y	5.08	66.98	16.23		150.0	
		Z	4.97	67.30	16.42		150.0	
10140-CAE	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	3.26	67.76	16.16	0.00	150.0	± 9.6 %
		Y	3.19	66.62	15.35		150.0	
		Z	3.16	67.32	15.80		150.0	
10141-CAE	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	3.38	67.90	16.34	0.00	150.0	± 9.6 %
		Y	3.32	66.77	15.56		150.0	
		Z	3.29	67.50	16.00		150.0	
10142-CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	1.93	70.04	16.11	0.00	150.0	± 9.6 %
		Y	1.69	66.50	14.20		150.0	
		Z	1.71	68.26	14.94		150.0	
10143-CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	2.41	70.07	15.69	0.00	150.0	± 9.6 %
		Y	2.14	66.99	14.32		150.0	
		Z	2.16	68.55	14.60		150.0	
10144-CAE	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	2.01	66.59	13.46	0.00	150.0	± 9.6 %
		Y	1.96	65.02	12.83		150.0	
		Z	1.82	65.43	12.49		150.0	
10145-CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	0.79	61.74	8.30	0.00	150.0	± 9.6 %
		Y	0.89	61.82	8.93		150.0	
		Z	0.67	60.49	7.04		150.0	
10146-CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	1.02	60.90	6.96	0.00	150.0	± 9.6 %
		Y	1.41	62.85	9.13		150.0	
		Z	0.86	60.00	5.90		150.0	
10147-CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	1.08	61.31	7.28	0.00	150.0	± 9.6 %
		Y	1.52	63.66	9.67		150.0	
		Z	0.87	60.00	5.96		150.0	