



# ELEMENT WASHINGTON DC LLC

7185 Oakland Mills Road, Columbia, MD 21046 USA  
Tel. 410.290.6652 / Fax 410.290.6654  
<http://www.element.com>

## PART 22 MEASUREMENT REPORT

**Applicant Name:**

Samsung Electronics Co., Ltd.  
129, Samsung-ro,  
Yeongtong-gu, Suwon-si  
Gyeonggi-do, 16677, Korea

**Date of Testing:**

5/30 - 7/31/2023

**Test Report Issue Date:**

8/4/2023

**Test Site/Location:**

Element Lab. Columbia, MD, USA

**Test Report Serial No.:**

1M2304260063-04.A3L

**FCC ID:**

**A3LSMS711B**

**Applicant Name:**

**Samsung Electronics Co., Ltd.**

**Application Type:**

Certification

**Model:**

SM-S711B/DS

**Additional Model(s):**

SM-S711B

**EUT Type:**

Portable Handset

**FCC Classification:**

PCS Licensed Transmitter Held to Ear (PCE)

**FCC Rule Part:**

22

**Test Procedure(s):**

ANSI C63.26-2015, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

**RJ Ortanez**  
Executive Vice President



<b>FCC ID:</b> A3LSMS711B	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2304260063-04.A3L	<b>Test Dates:</b> 5/30 - 7/31/2023	<b>EUT Type:</b> Portable Handset	Page 1 of 65

V3.0 1/4/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

# TABLE OF CONTENTS

1.0	INTRODUCTION .....	4
1.1	Scope .....	4
1.2	Element Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description .....	5
2.2	Device Capabilities.....	5
2.3	Test Configuration .....	5
2.4	Software and Firmware .....	5
2.5	EMI Suppression Device(s)/Modifications .....	5
3.0	DESCRIPTION OF TESTS .....	6
3.1	Evaluation Procedure .....	6
3.2	Radiated Power and Radiated Spurious Emissions .....	6
4.0	MEASUREMENT UNCERTAINTY .....	7
5.0	TEST EQUIPMENT CALIBRATION DATA .....	8
6.0	SAMPLE CALCULATIONS .....	9
7.0	TEST RESULTS .....	10
7.1	Summary.....	10
7.2	Occupied Bandwidth .....	11
7.3	Spurious and Harmonic Emissions at Antenna Terminal .....	26
7.4	Band Edge Emissions at Antenna Terminal.....	36
7.5	Radiated Power (ERP) .....	43
7.6	Radiated Spurious Emissions Measurements.....	47
7.7	Frequency Stability / Temperature Variation .....	60
8.0	CONCLUSION.....	65

<b>FCC ID:</b> A3LSMS711B	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2304260063-04.A3L	<b>Test Dates:</b> 5/30 - 7/31/2023	<b>EUT Type:</b> Portable Handset	Page 2 of 65

## PART 22 MEASUREMENT REPORT

Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	ERP		EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	Max. Power [W]	Max. Power [dBm]	
GSM/GPRS	N/A	GMSK	824.2 - 848.8	0.710	28.52	1.166	30.67	241KGXW
EDGE	N/A	8-PSK	824.2 - 848.8	0.120	20.81	0.197	22.96	252KG7W
VCDMA	N/A	Spread Spectrum	826.4 - 846.6	0.087	19.41	0.143	21.56	4M19F9W
LTE Band 26/5	15MHz (Band 26 only)	QPSK	831.5 - 841.5	0.067	18.28	0.110	20.43	13M6G7D
		16QAM	831.5 - 841.5	0.047	16.70	0.077	18.85	13M6W7D
	10 MHz	QPSK	829.0 - 844.0	0.066	18.20	0.108	20.35	9M04G7D
		16QAM	829.0 - 844.0	0.044	16.44	0.072	18.59	9M05W7D
	5 MHz	QPSK	826.5 - 846.5	0.070	18.43	0.114	20.58	4M55G7D
		16QAM	826.5 - 846.5	0.048	16.79	0.078	18.94	4M57W7D
	3 MHz	QPSK	825.5 - 847.5	0.066	18.21	0.109	20.36	2M73G7D
		16QAM	825.5 - 847.5	0.045	16.52	0.074	18.67	2M73W7D
	1.4 MHz	QPSK	824.7 - 848.3	0.066	18.19	0.108	20.34	1M11G7D
		16QAM	824.7 - 848.3	0.044	16.39	0.071	18.54	1M10W7D
NR Band n5	20 MHz	$\pi/2$ BPSK	834.0 - 839.0	0.076	18.78	0.124	20.93	18M0G7D
		QPSK	834.0 - 839.0	0.072	18.59	0.119	20.74	19M1G7D
		16QAM	834.0 - 839.0	0.059	17.69	0.096	19.84	19M1W7D
	15 MHz	$\pi/2$ BPSK	831.5 - 841.5	0.075	18.75	0.123	20.90	13M6G7D
		QPSK	831.5 - 841.5	0.071	18.54	0.117	20.69	14M2G7D
		16QAM	831.5 - 841.5	0.057	17.54	0.093	19.69	14M2W7D
	10 MHz	$\pi/2$ BPSK	829.0 - 844.0	0.074	18.67	0.121	20.82	9M04G7D
		QPSK	829.0 - 844.0	0.069	18.41	0.114	20.56	9M34G7D
		16QAM	829.0 - 844.0	0.054	17.34	0.089	19.49	9M36W7D
	5 MHz	$\pi/2$ BPSK	826.5 - 846.5	0.075	18.77	0.123	20.92	4M53G7D
		QPSK	826.5 - 846.5	0.071	18.48	0.116	20.63	4M55G7D
		16QAM	826.5 - 846.5	0.054	17.29	0.088	19.44	4M59W7D

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 3 of 65

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 Element Test Location

These measurement tests were conducted at the Element Laboratory located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

### 1.3 Test Facility / Accreditations

Measurements were performed at Element Lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreement.

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 4 of 65

V3.0 1/4/2022

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMS711B**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 22.

**Test Device Serial No.:** 0168M, 0073M, 1056M, 0874M, 1050M, 0974M

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR (FR1), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz and 6GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer.

This device uses a tuner circuit that dynamically updates the antenna impedance parameters to optimize antenna performance for certain bands and modes of operation. The tuner for this device was set to simulate a "free space" condition where the transmit antenna is matched to the medium into which it is transmitting and, thus, the power is at its maximum level.

### 2.3 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

### 2.4 Software and Firmware

Testing was performed on device(s) using software/firmware version S711BXXU\_0627\_0900\_devFull installed on the EUT.

### 2.5 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 5 of 65

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the “American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services” (ANSI C63.26-2015) were used in the measurement of the EUT.

**Deviation from Measurement Procedure.....None**

### 3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI C63.26-2015. For emissions below 1GHz, a half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi];}$$

where  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g \text{ [dBm]} - \text{cable loss [dB]}$ .

For radiated spurious emissions measurements, the field strength conversion method is used per the formulas in Section 5.2.7 of ANSI C63.26-2015. Field Strength (EIRP) is calculated using the following formulas:

$$E_{\text{[dB}\mu\text{V/m]}} = \text{Measured amplitude level}_{\text{[dBm]}} + 107 + \text{Cable Loss}_{\text{[dB]}} + \text{Antenna Factor}_{\text{[dB/m]}}$$

And

$$\text{EIRP}_{\text{[dBm]}} = E_{\text{[dB}\mu\text{V/m]}} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015.

<b>FCC ID:</b> A3LSMS711B	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2304260063-04.A3L	<b>Test Dates:</b> 5/30 - 7/31/2023	<b>EUT Type:</b> Portable Handset	Page 6 of 65

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 7 of 65

V3.0 1/4/2022

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AP2-001	EMC Cable and Switch System	1/11/2023	Annual	1/11/2024	AP2-001
-	AP2-002	EMC Cable and Switch System	1/11/2023	Annual	1/11/2024	AP2-002
-	ETS-001	EMC Cable and Switch System	1/11/2023	Annual	1/11/2024	ETS-001
-	ETS-002	EMC Cable and Switch System	1/11/2023	Annual	1/11/2024	ETS-002
-	LTX1	Licensed Transmitter Cable Set	1/12/2023	Annual	1/12/2024	LTX1
-	LTX2	Licensed Transmitter Cable Set	1/12/2023	Annual	1/12/2024	LTX2
-	LTX3	Licensed Transmitter Cable Set	1/12/2023	Annual	1/12/2024	LTX3
-	LTX4	Licensed Transmitter Cable Set	1/12/2023	Annual	1/12/2024	LTX4
-	LTX5	Licensed Transmitter Cable Set	1/12/2023	Annual	1/12/2024	LTX5
Anritsu	MT8821C	Radio Communication Analyzer	N/A			620152694
EMCO	3115	Horn Antenna (1-18GHz)	8/8/2022	Biennial	8/8/2024	9704-5182
EMCO	3116	Horn Antenna (18-40GHz)	7/20/2021	Biennial	8/30/2023	9203-2178
Keysight Technologies	N9030A	PXA Signal Analyzer (3Hz-26.5GHz)	9/6/2022	Annual	9/6/2023	MY54490576
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	3/15/2023	Annual	3/15/2024	MY52350166
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			112347
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Test Antenna	9/28/2022	Biennial	9/28/2024	101058
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	8/29/2022	Annual	8/29/2023	100342
Rohde & Schwarz	ESW44	EMI Test Receiver (2Hz-44GHz)	3/1/2023	Annual	3/1/2024	101716
Rohde & Schwarz	VULB9162	Bi-Log Antenna	2/21/2023	Biennial	2/21/2025	00301
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	8/30/2022	Biennial	8/30/2024	A051107

Table 5-1. Test Equipment

### Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 8 of 65



## 6.0 SAMPLE CALCULATIONS

### GSM Emission Designator

#### **Emission Designator = 250KGXW**

GSM BW = 250 kHz  
 G = Phase Modulation  
 X = Cases not otherwise covered  
 W = Combination (Audio/Data)

### EDGE Emission Designator

#### **Emission Designator = 250KG7W**

EDGE BW = 250 kHz  
 G = Phase Modulation  
 7 = Quantized/Digital Info  
 W = Combination (Audio/Data)

### WCDMA Emission Designator

#### **Emission Designator = 4M16F9W**

WCDMA BW = 4.16 MHz  
 F = Frequency Modulation  
 9 = Composite Digital Info  
 W = Combination (Audio/Data)

### QPSK Modulation

#### **Emission Designator = 8M62G7D**

LTE BW = 8.62 MHz  
 G = Phase Modulation  
 7 = Quantized/Digital Info  
 D = Data transmission, telemetry, telecommand

### QAM Modulation

#### **Emission Designator = 8M45W7D**

LTE BW = 8.45 MHz  
 W = Amplitude/Angle Modulated  
 7 = Quantized/Digital Info  
 D = Data transmission, telemetry, telecommand

### Spurious Radiated Emission

#### **Example: Spurious emission at 3700.40 MHz**

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was  $-81.0$  dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0$  dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of  $-30.9$  dBm yielding  $-24.80$  dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm  $- (-24.80) = 50.3$  dBc.

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 9 of 65

V3.0 1/4/2022

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: Samsung Electronics Co., Ltd.  
 FCC ID: A3LSMS711B  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 Mode(s): GSM/GPRS/WCDMA/NR/LTE

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
<b>CONDUCTED</b>	Transmitter Conducted Output Power	2.1046(a), 2.1046(c)	N/A	<b>PASS</b>	See RF Exposure Report
	Occupied Bandwidth	2.1049(h)	N/A	<b>PASS</b>	Section 7.2
	Conducted Band Edge / Spurious Emissions	2.1051, 22.917(a)	$\geq 43 + 10 \log(P[\text{Watts}])$ dB of attenuation below transmitter power	<b>PASS</b>	Sections 7.3, 7.4
	Frequency Stability	2.1055, 22.355	The carrier frequency of the transmitter must be maintained within the 2.5ppm	<b>PASS</b>	Section 7.7
<b>RADIATED</b>	Effective Radiated Power / Equivalent Isotropic Radiated Power	22.913(a)(5)	< 7 Watts max. ERP	<b>PASS</b>	Section 7.5
	Radiated Spurious Emissions	2.1053, 22.917(a)	$> 43 + 10 \log_{10}(P[\text{Watts}])$ for all out-of-band emissions	<b>PASS</b>	Section 7.6

**Table 7-1. Summary of Test Results**

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is EMC Software Tool v1.0.

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 10 of 65

## 7.2 Occupied Bandwidth

### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Procedure Used


ANSI C63.26-2015 – Section 5.4.4

### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

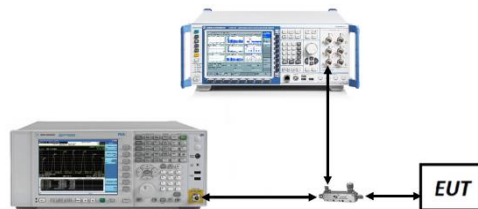

**Figure 7-1. Test Instrument & Measurement Setup**

### Test Notes

None.


FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 11 of 65

Mode	Bandwidth	Modulation	OBW [MHz]
GSM-Cell	N/A	GMSK	0.241
GSM-Cell Edge		8-PSK	0.252
WCDMA-Cell		Spread Spectrum	4.19
LTE-B26-5	15MHz	QPSK	13.55
		16QAM	13.56
	10MHz	QPSK	9.04
		16QAM	9.05
	5 MHz	QPSK	4.55
		16QAM	4.57
	3 MHz	QPSK	2.73
		16QAM	2.73
	1.4 MHz	QPSK	1.11
		16QAM	1.10
NR-n5	20 MHz	$\pi/2$ BPSK	17.99
		QPSK	19.11
		16QAM	19.08
	15 MHz	$\pi/2$ BPSK	13.56
		QPSK	14.17
		16QAM	14.22
	10 MHz	$\pi/2$ BPSK	9.04
		QPSK	9.34
		16QAM	9.36
	5 MHz	$\pi/2$ BPSK	4.53
		QPSK	4.55
		16QAM	4.59


**Table 7-2. Occupied Bandwidth Test Results**

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 12 of 65

# LTE Band 26/5

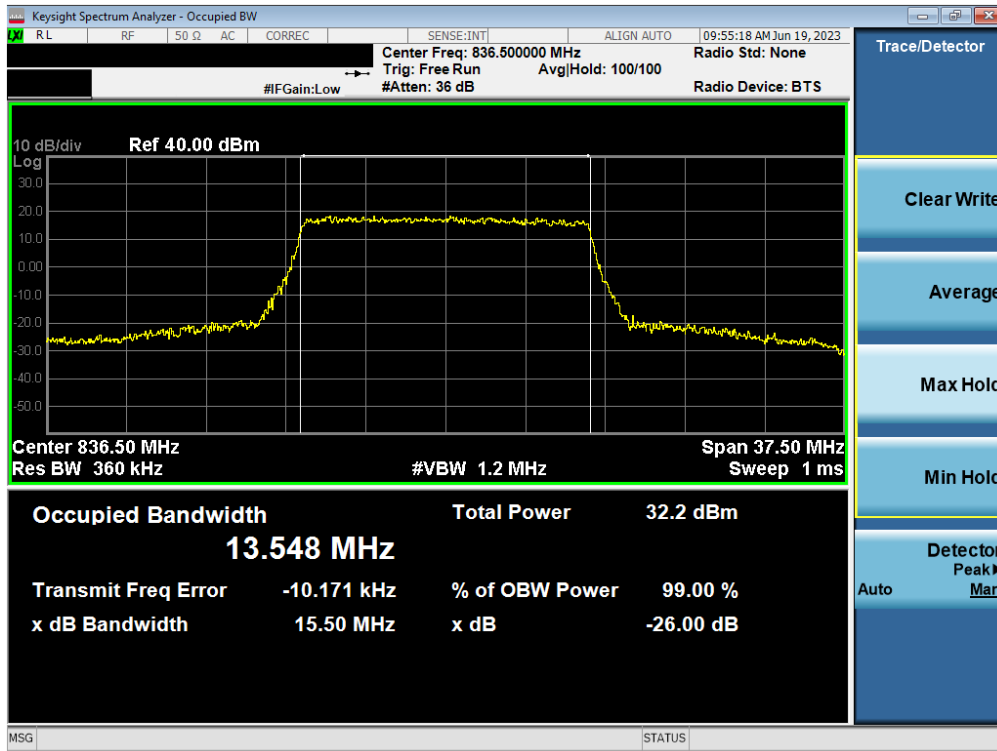


Plot 7-1. Occupied Bandwidth Plot (LTE Band 26 - 15MHz QPSK - Full RB)

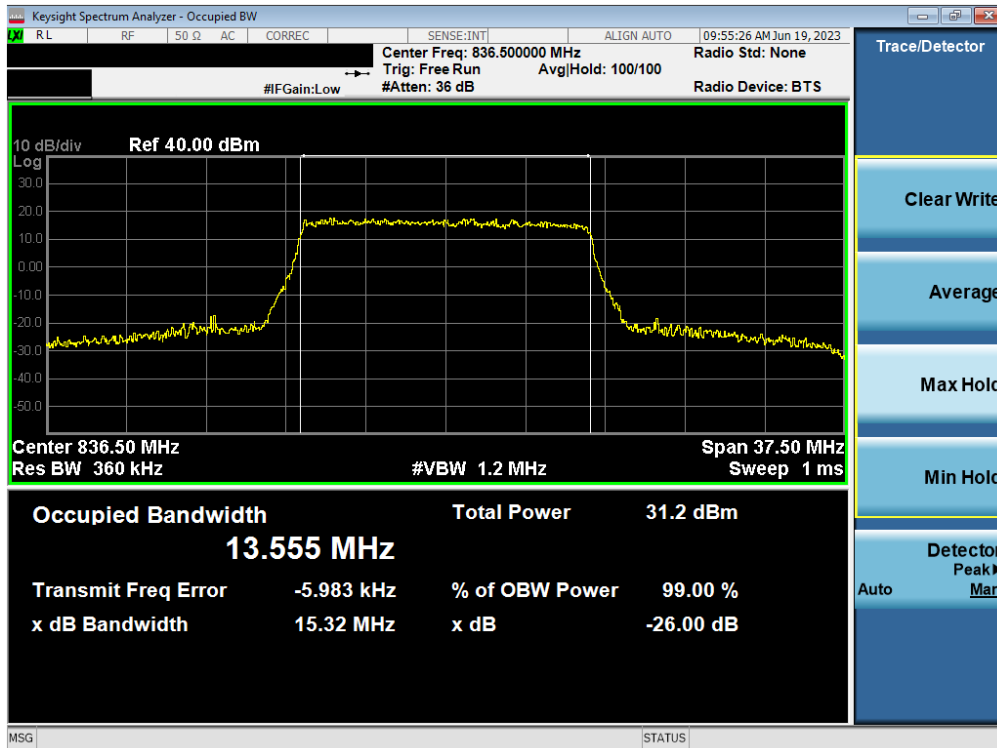


Plot 7-2. Occupied Bandwidth Plot (LTE Band 26 - 15MHz 16-QAM - Full RB)

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 13 of 65

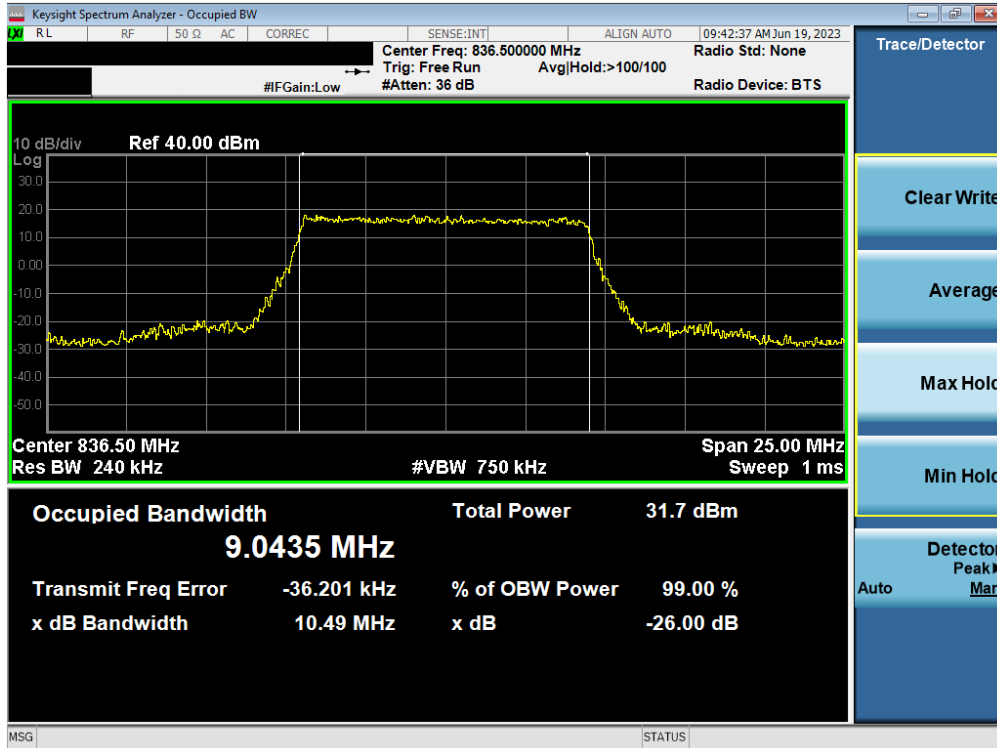

Plot 7-3. Occupied Bandwidth Plot (LTE Band 26/5 - 10MHz QPSK - Full RB)

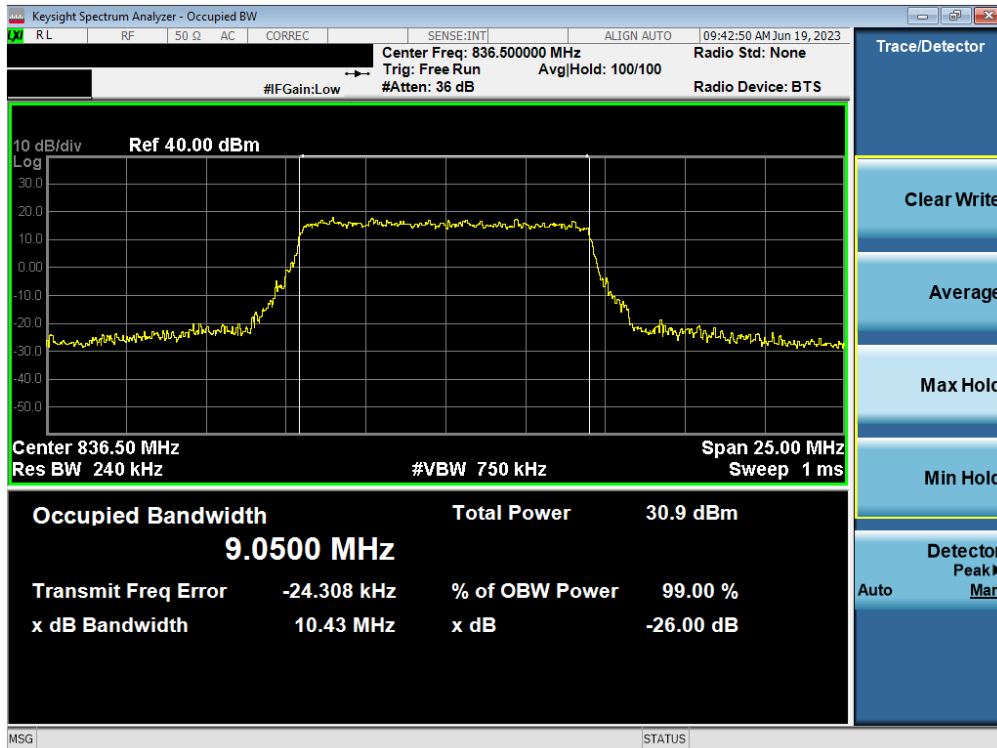


Plot 7-4. Occupied Bandwidth Plot (LTE Band 26/5 - 10MHz 16-QAM - Full RB)

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 14 of 65




Plot 7-5. Occupied Bandwidth Plot (LTE Band 26/5 - 5MHz QPSK - Full RB)

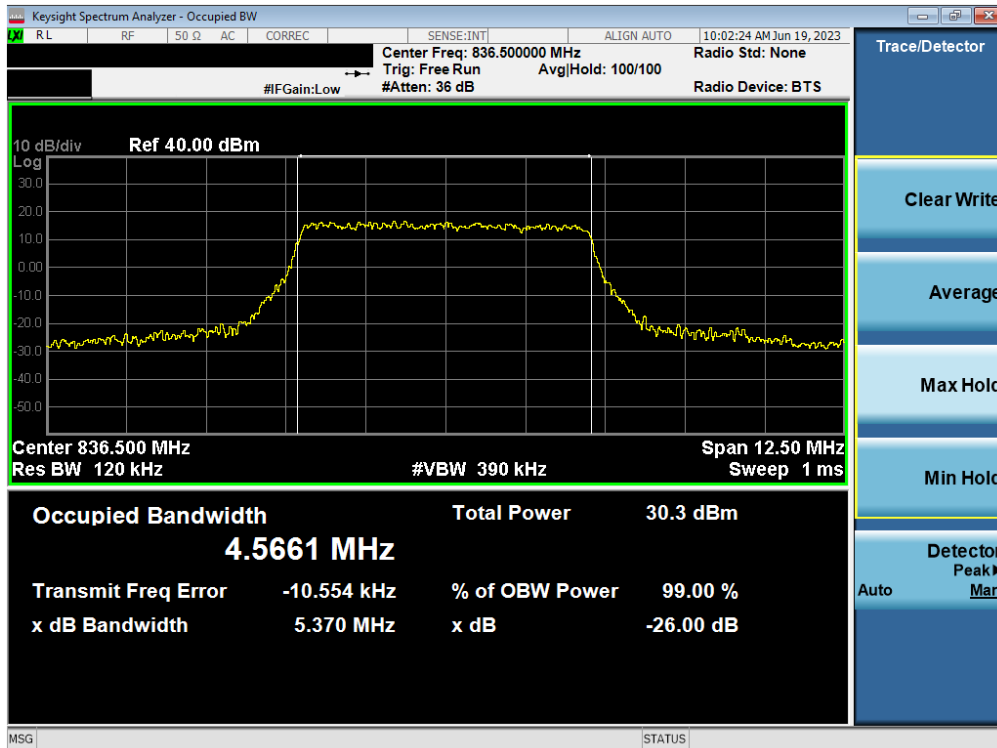


Plot 7-6. Occupied Bandwidth Plot (LTE Band 26/5 - 5MHz 16-QAM - Full RB)

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 15 of 65

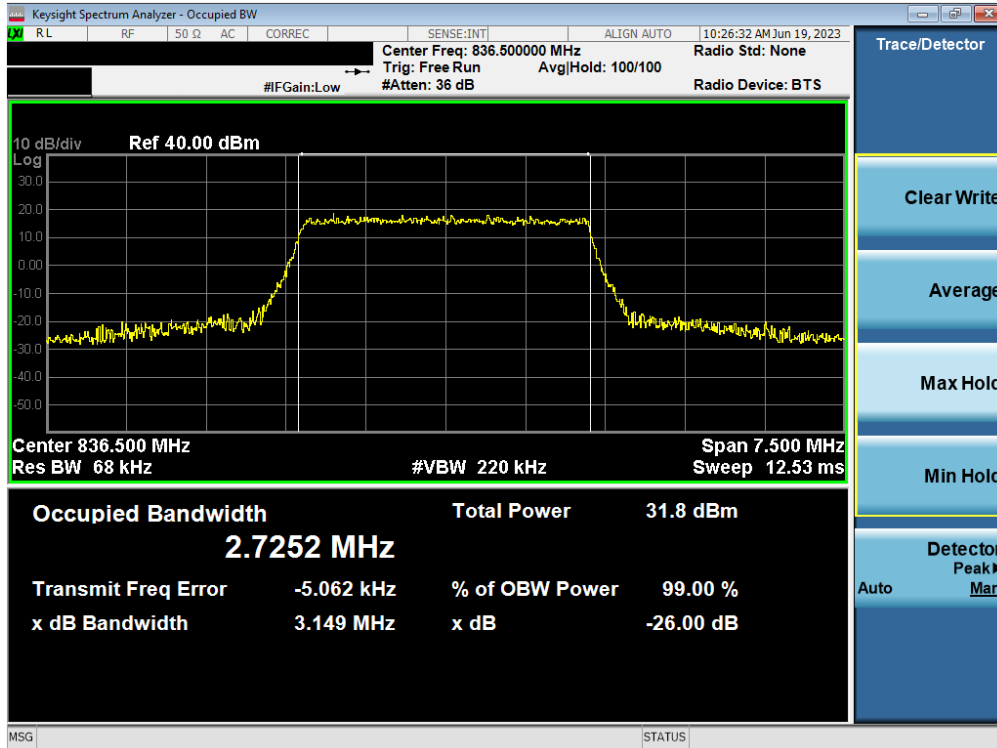


Plot 7-7. Occupied Bandwidth Plot (LTE Band 26/5 - 3MHz QPSK - Full RB)

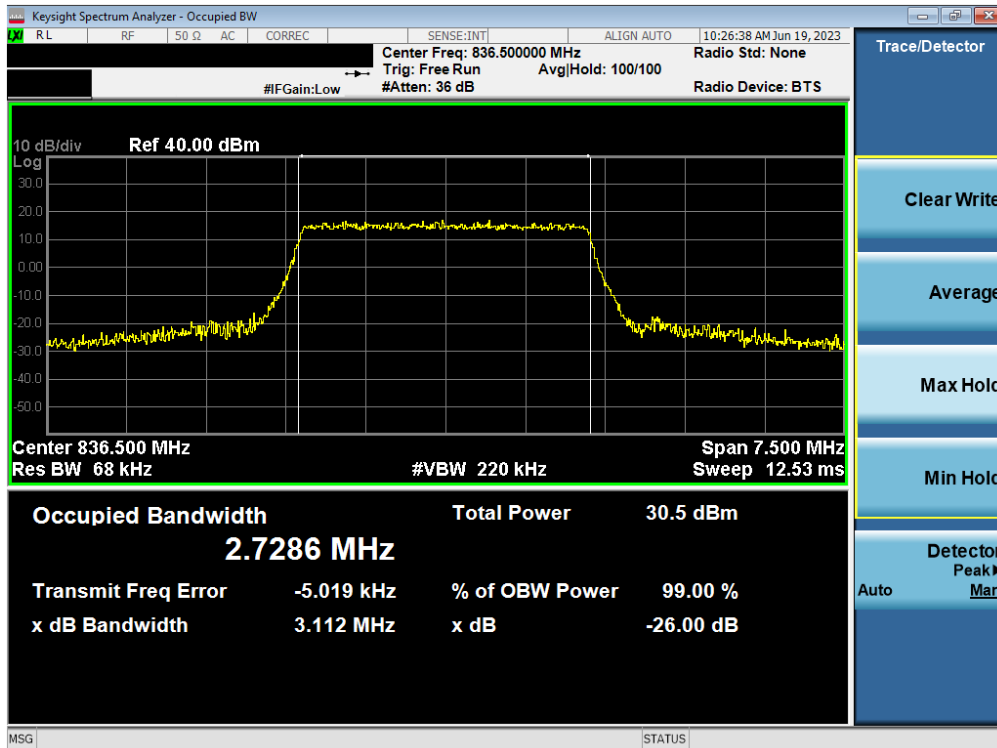


Plot 7-8. Occupied Bandwidth Plot (LTE Band 26/5 - 3MHz 16-QAM - Full RB)

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 16 of 65



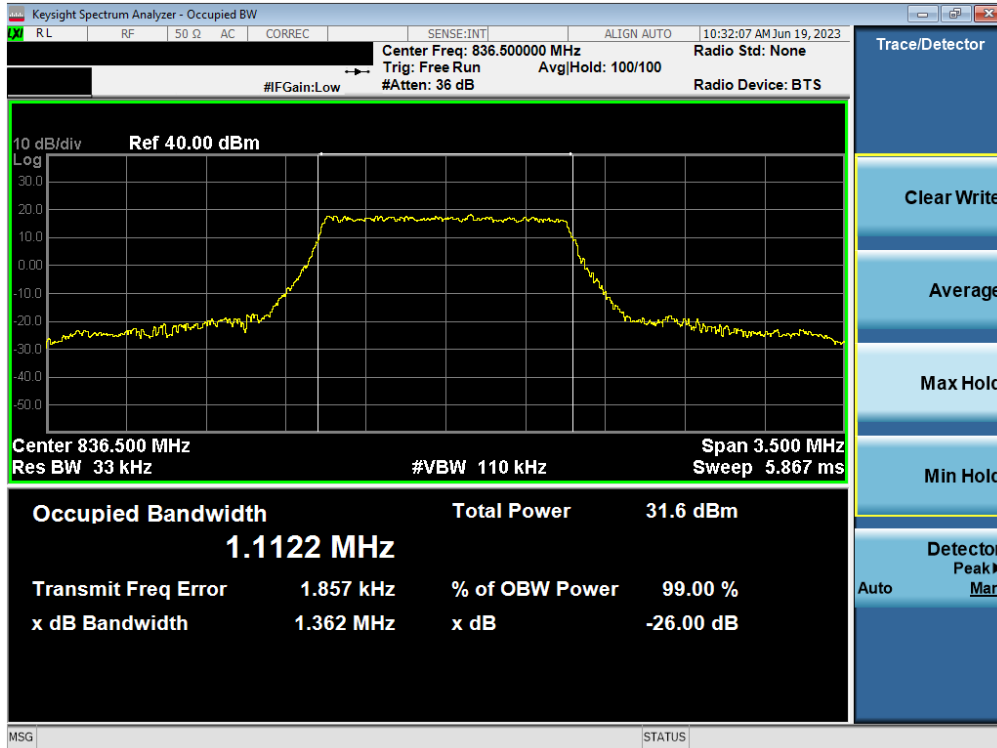


Plot 7-9. Occupied Bandwidth Plot (LTE Band 26/5 - 1.4MHz QPSK - Full RB)

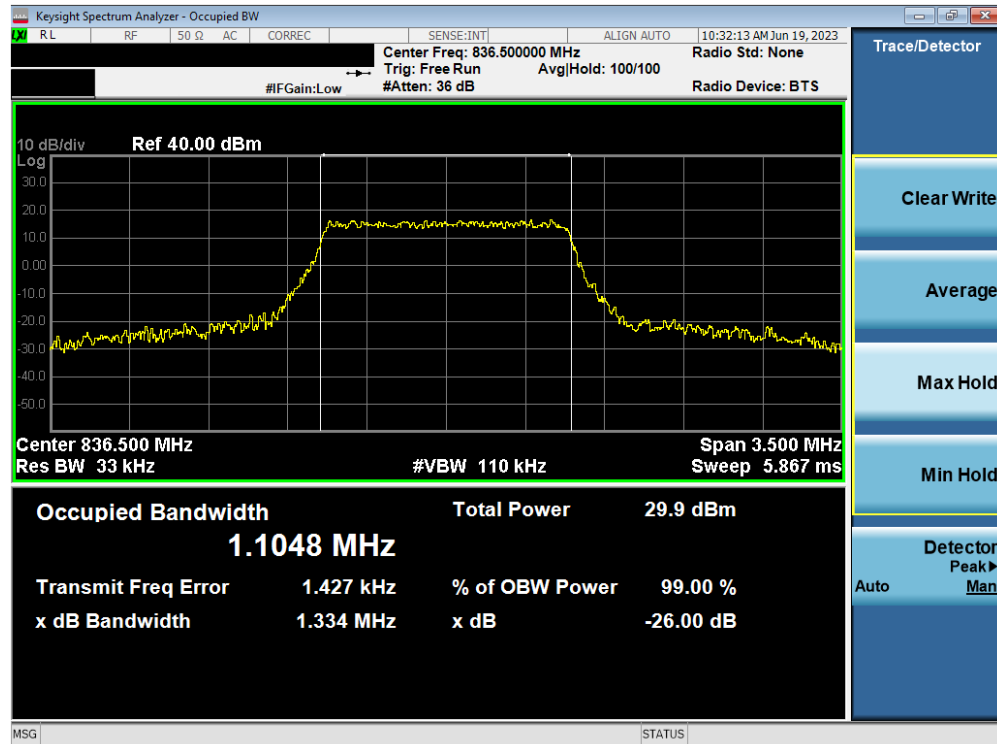


Plot 7-10. Occupied Bandwidth Plot (LTE Band 26/5 - 1.4MHz 16-QAM - Full RB)

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 17 of 65

# NR Band n5

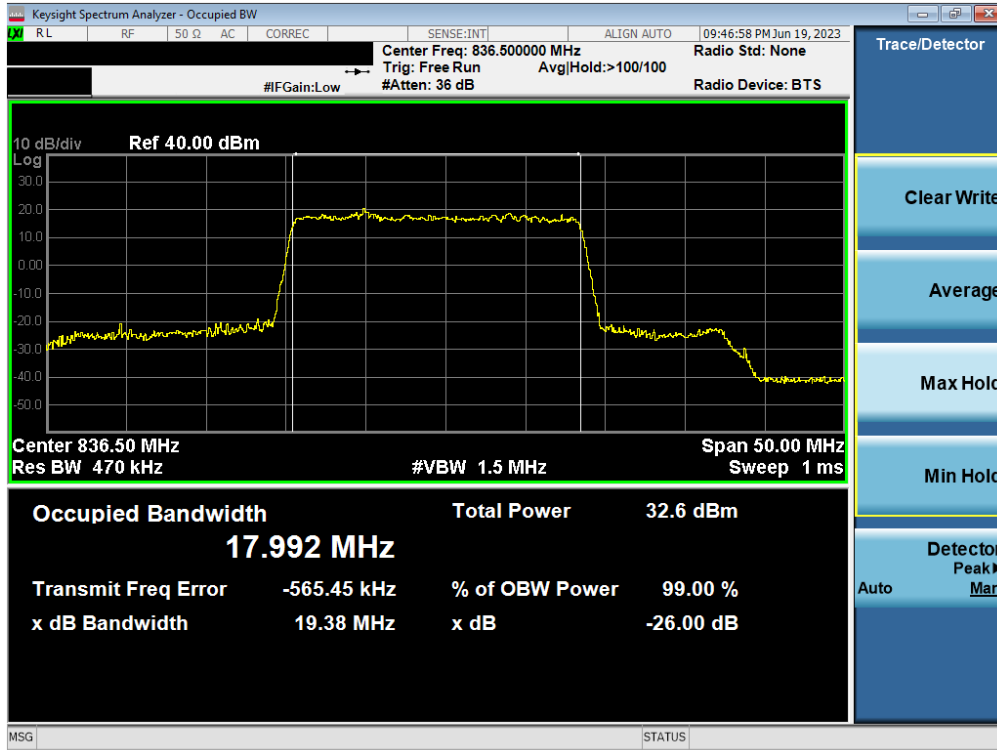


Plot 7-11. Occupied Bandwidth Plot (NR Band n5 - 20MHz  $\pi/2$  BPSK - Full RB)

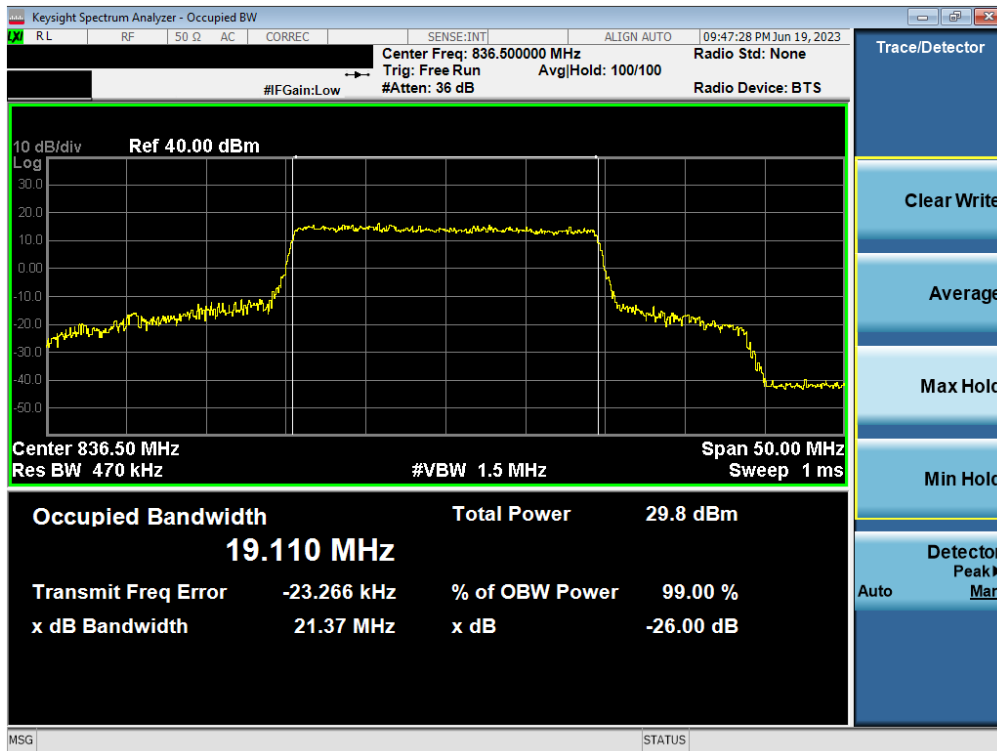


Plot 7-12. Occupied Bandwidth Plot (NR Band n5 - 20MHz QPSK - Full RB)

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 18 of 65

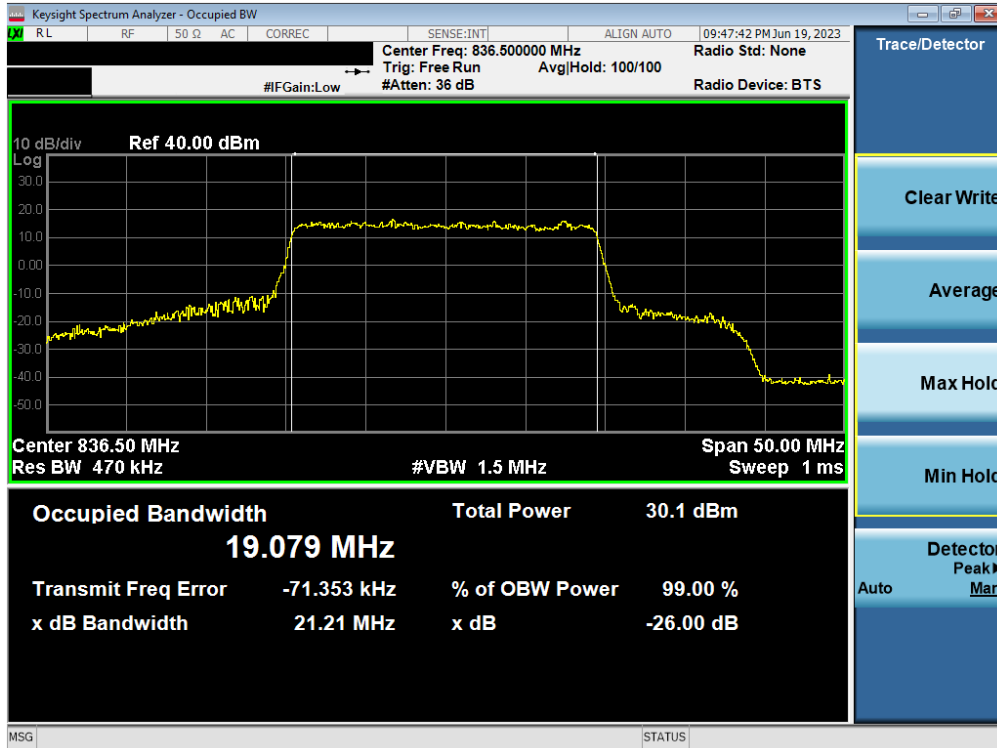


Plot 7-13. Occupied Bandwidth Plot (NR Band n5 - 20MHz 16-QAM - Full RB)

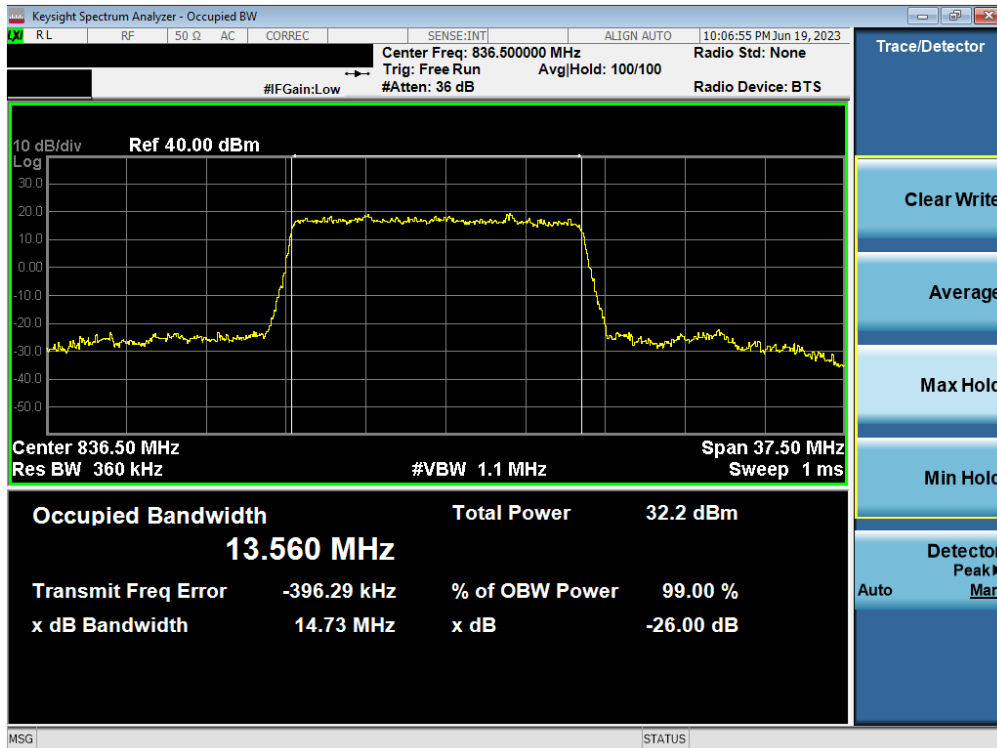

Plot 7-14. Occupied Bandwidth Plot (NR Band n5 - 15MHz  $\pi/2$  BPSK - Full RB)

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 19 of 65

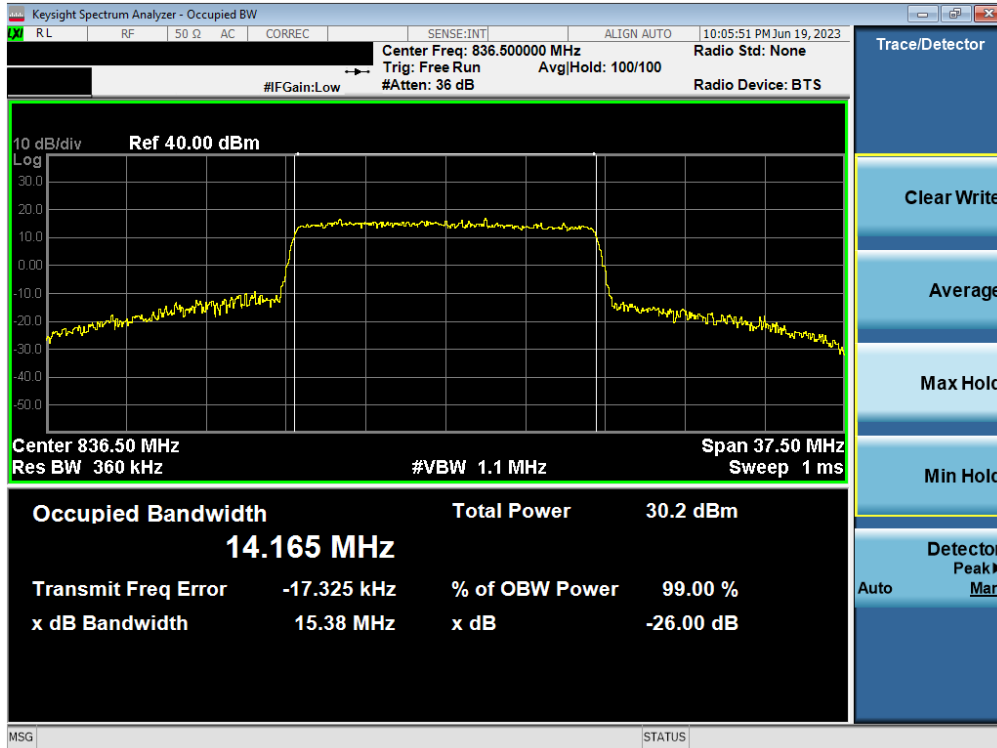


Plot 7-15. Occupied Bandwidth Plot (NR Band n5 - 15MHz QPSK - Full RB)



Plot 7-16. Occupied Bandwidth Plot (NR Band n5 - 15MHz 16-QAM - Full RB)

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 20 of 65

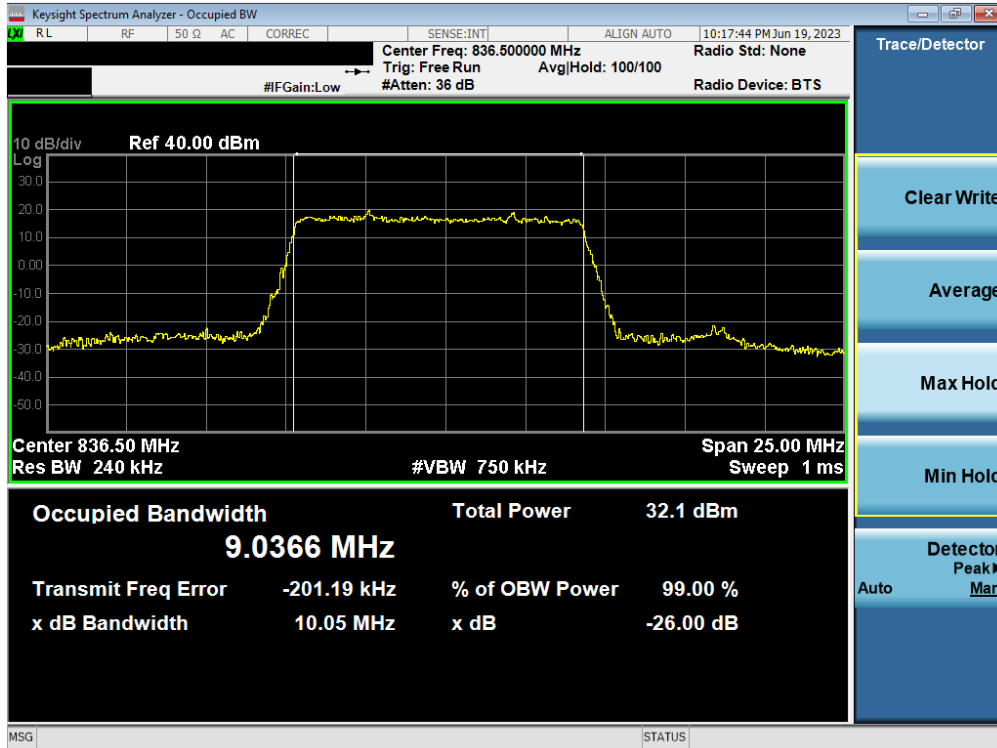


Plot 7-17. Occupied Bandwidth Plot (NR Band n5 - 10MHz  $\pi/2$  BPSK - Full RB)



Plot 7-18. Occupied Bandwidth Plot (NR Band n5 - 10MHz QPSK - Full RB)

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 21 of 65

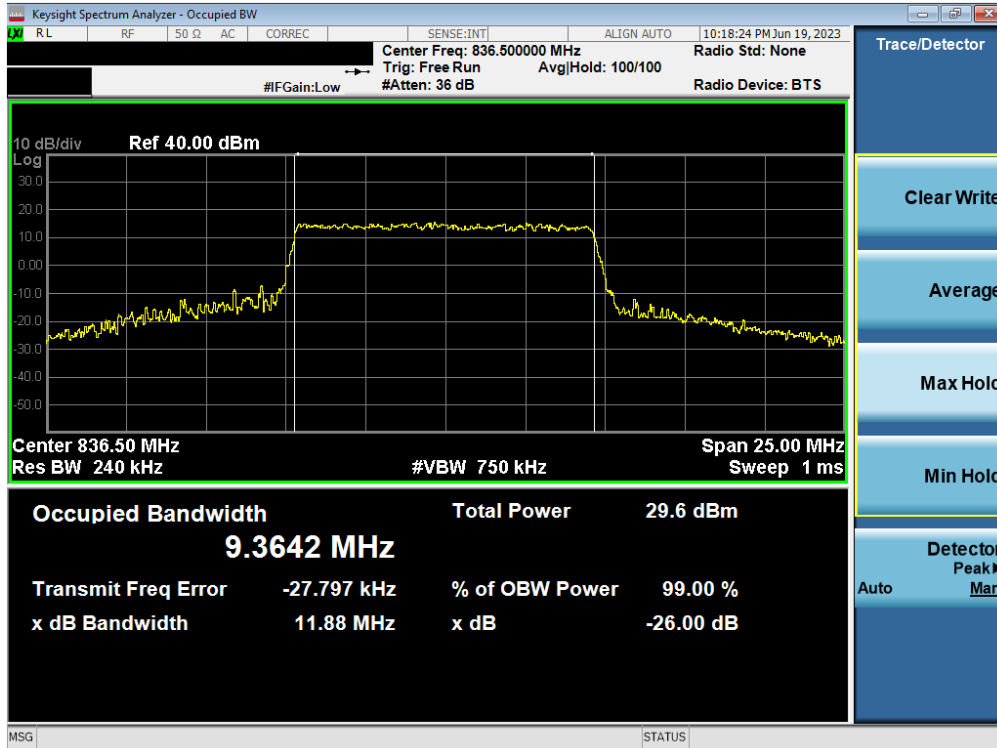


Plot 7-19. Occupied Bandwidth Plot (NR Band n5 - 10MHz 16-QAM - Full RB)




Plot 7-20. Occupied Bandwidth Plot (NR Band n5 - 5MHz  $\pi/2$  BPSK - Full RB)

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 22 of 65

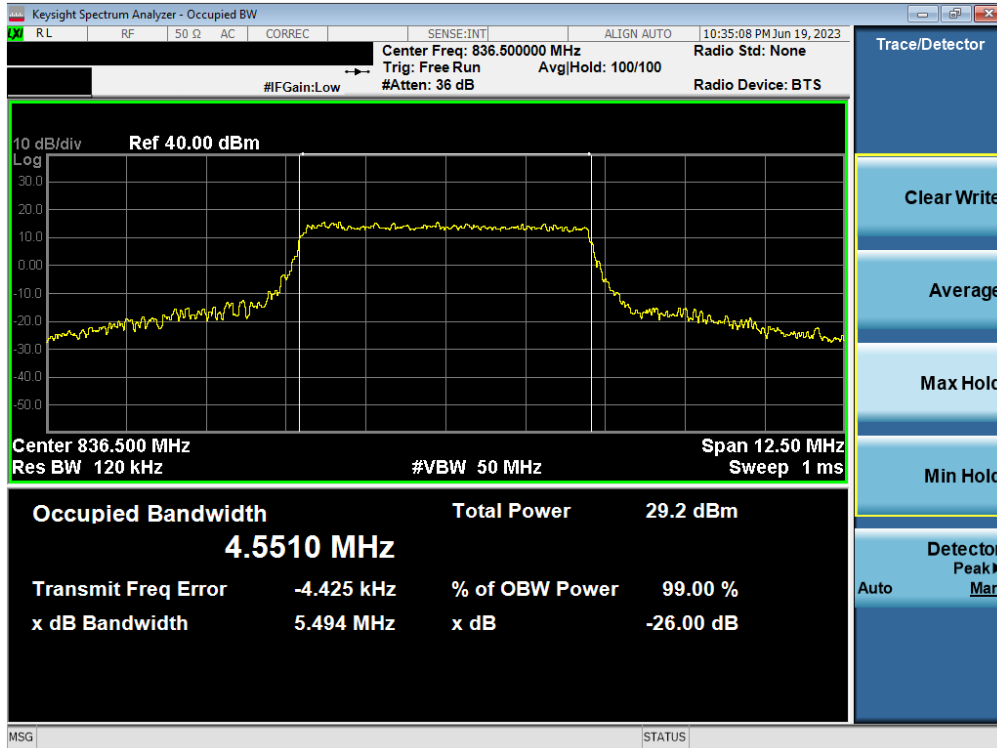

Plot 7-21. Occupied Bandwidth Plot (NR Band n5 - 5MHz QPSK - Full RB)

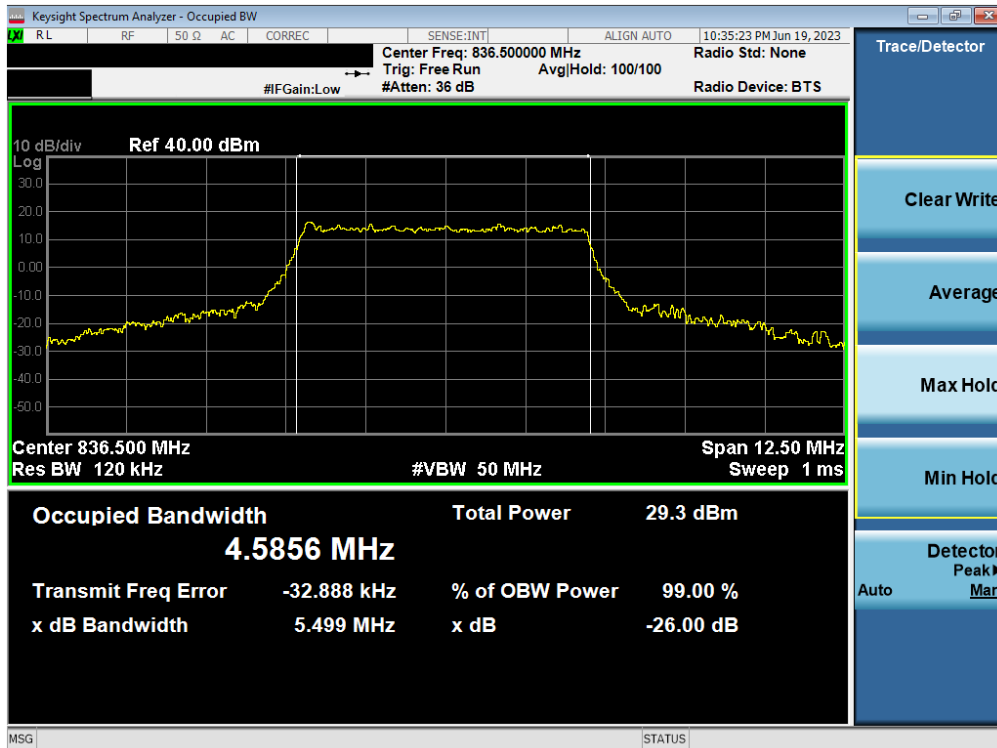


Plot 7-22. Occupied Bandwidth Plot (NR Band n5 - 5MHz 16-QAM - Full RB)

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 23 of 65

# GPRS Cell



Plot 7-23. Occupied Bandwidth Plot (GPRS, Ch. 190)

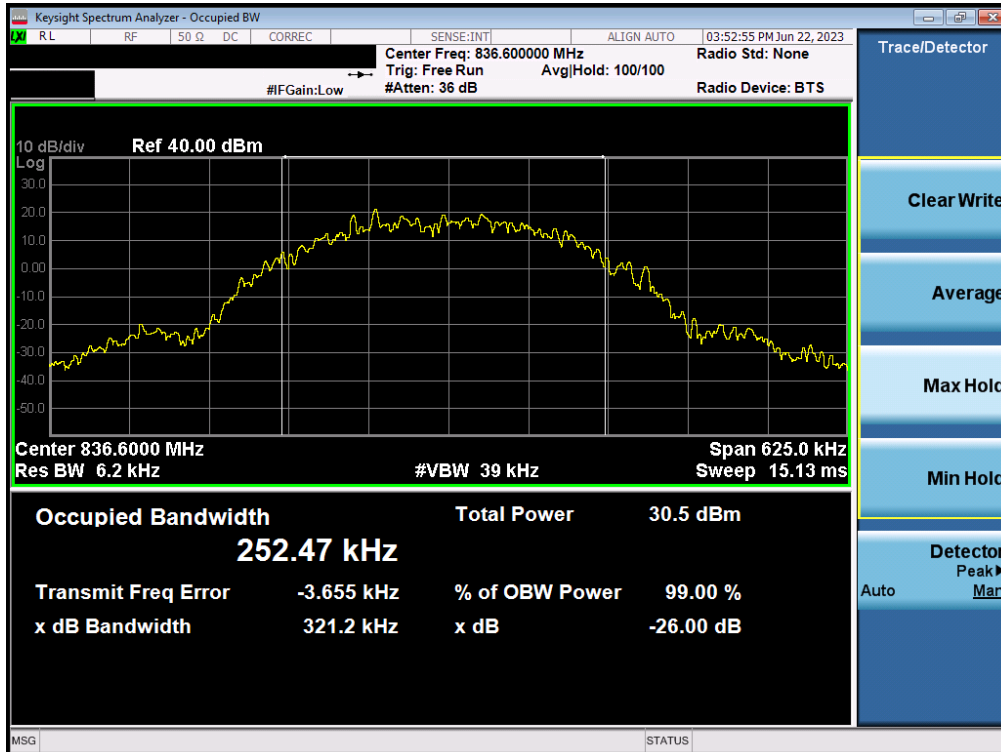


Plot 7-24. Occupied Bandwidth Plot (EDGE, Ch. 190)

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 24 of 65



# WCDMA Cell

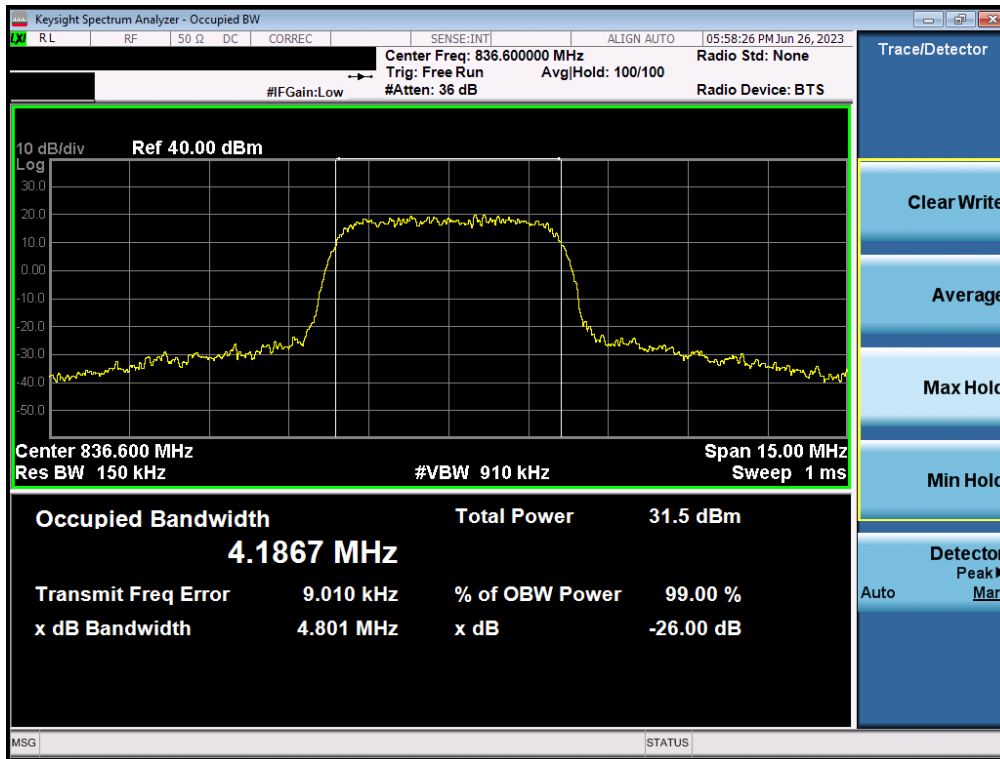

Plot 7-25. Occupied Bandwidth Plot (WCDMA, Ch. 4183)

<b>FCC ID:</b> A3LSMS711B	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2304260063-04.A3L	<b>Test Dates:</b> 5/30 - 7/31/2023	<b>EUT Type:</b> Portable Handset	Page 25 of 65

### 7.3 Spurious and Harmonic Emissions at Antenna Terminal

#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

**The minimum permissible attenuation level of any spurious emission is  $43 + 10 \log_{10}(P_{[Watts]})$ , where P is the transmitter power in Watts.**

#### Test Procedure Used


ANSI C63.26-2015 – Section 5.7.4

#### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

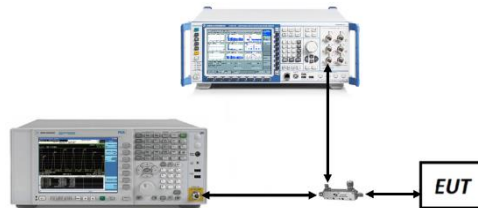

**Figure 7-2. Test Instrument & Measurement Setup**

#### Test Notes

1. Per Part 22, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth 100 kHz or greater for measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
2. For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 26 of 65

Mode	Bandwidth	Channel	Range [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]
GSM-Cell	250kHz	Low	30.0 - 823.0	-36.45	-13.0	-23.45
		Low	849.0 - 1000.0	-56.02	-13.0	-43.02
		Low	1000.0 - 10000.0	-29.46	-13.0	-16.46
		Mid	30.0 - 824.0	-54.79	-13.0	-41.79
		Mid	849.0 - 1000.0	-55.90	-13.0	-42.90
		Mid	1000.0 - 10000.0	-29.25	-13.0	-16.25
		High	30.0 - 824.0	-54.01	-13.0	-41.01
		High	850.0 - 1000.0	-37.93	-13.0	-24.93
		High	1000.0 - 10000.0	-29.03	-13.0	-16.02
WCDMA-Cell	5MHz	Low	30.0 - 823.0	-31.35	-13.0	-18.35
		Low	849.0 - 1000.0	-63.35	-13.0	-50.35
		Low	1000.0 - 10000.0	-47.05	-13.0	-34.05
		Mid	30.0 - 824.0	-55.50	-13.0	-42.50
		Mid	849.0 - 1000.0	-56.11	-13.0	-43.11
		Mid	1000.0 - 10000.0	-46.96	-13.0	-33.96
		High	30.0 - 824.0	-62.61	-13.0	-49.61
		High	850.0 - 1000.0	-33.93	-13.0	-20.93
		High	1000.0 - 10000.0	-47.11	-13.0	-34.11
LTE-B26-5	10MHz	Low	30.0 - 823.0	-46.21	-13.0	-33.21
		Low	849.0 - 1000.0	-53.82	-13.0	-40.82
		Low	1000.0 - 10000.0	-45.28	-13.0	-32.28
		Mid	30.0 - 824.0	-50.27	-13.0	-37.27
		Mid	849.0 - 1000.0	-50.23	-13.0	-37.23
		Mid	1000.0 - 10000.0	-45.47	-13.0	-32.47
		High	30.0 - 824.0	-54.41	-13.0	-41.41
		High	850.0 - 1000.0	-46.57	-13.0	-33.57
		High	1000.0 - 10000.0	-45.15	-13.0	-32.15
NR-n5	20MHz	Low	30.0 - 824.0	-45.07	-13.0	-32.07
		Low	849.0 - 1000.0	-51.10	-13.0	-38.10
		Low	1000.0 - 10000.0	-45.21	-13.0	-32.21
		Mid	30.0 - 824.0	-45.22	-13.0	-32.22
		Mid	849.0 - 1000.0	-46.80	-13.0	-33.79
		Mid	1000.0 - 10000.0	-45.32	-13.0	-32.32
		High	30.0 - 824.0	-50.06	-13.0	-37.06
		High	849.0 - 1000.0	-47.05	-13.0	-34.05
		High	1000.0 - 10000.0	-45.33	-13.0	-32.33


**Table 7-3. Spurious and Harmonic Emissions Test Results**

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 27 of 65

### LTE Band 26/5

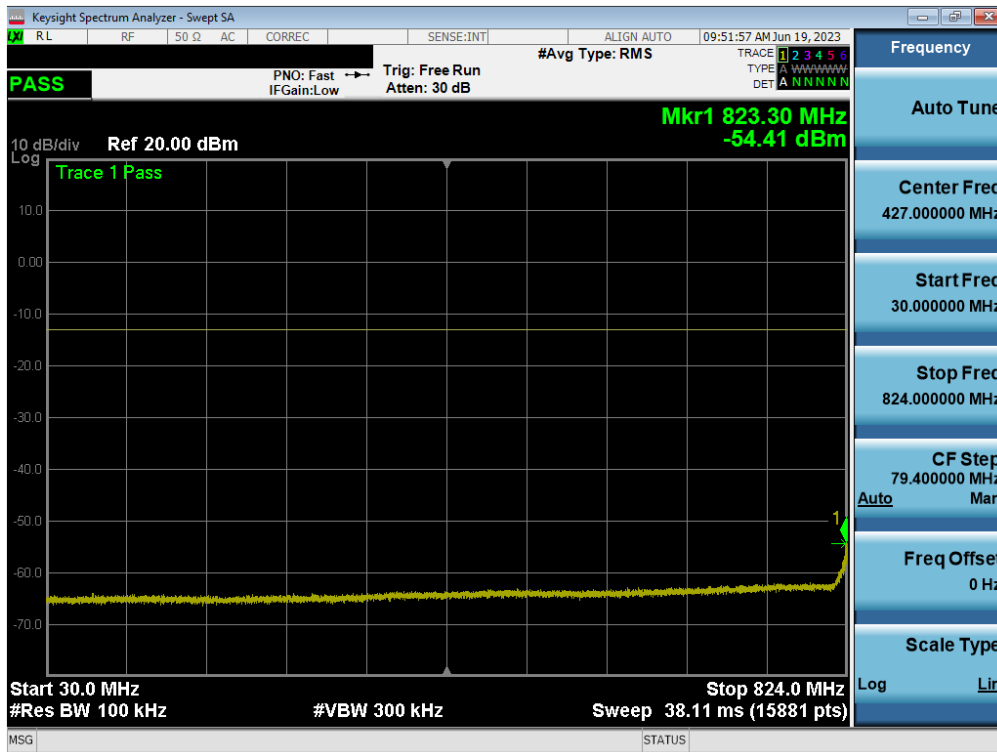


Plot 7-26. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - 1 RB - High Channel)

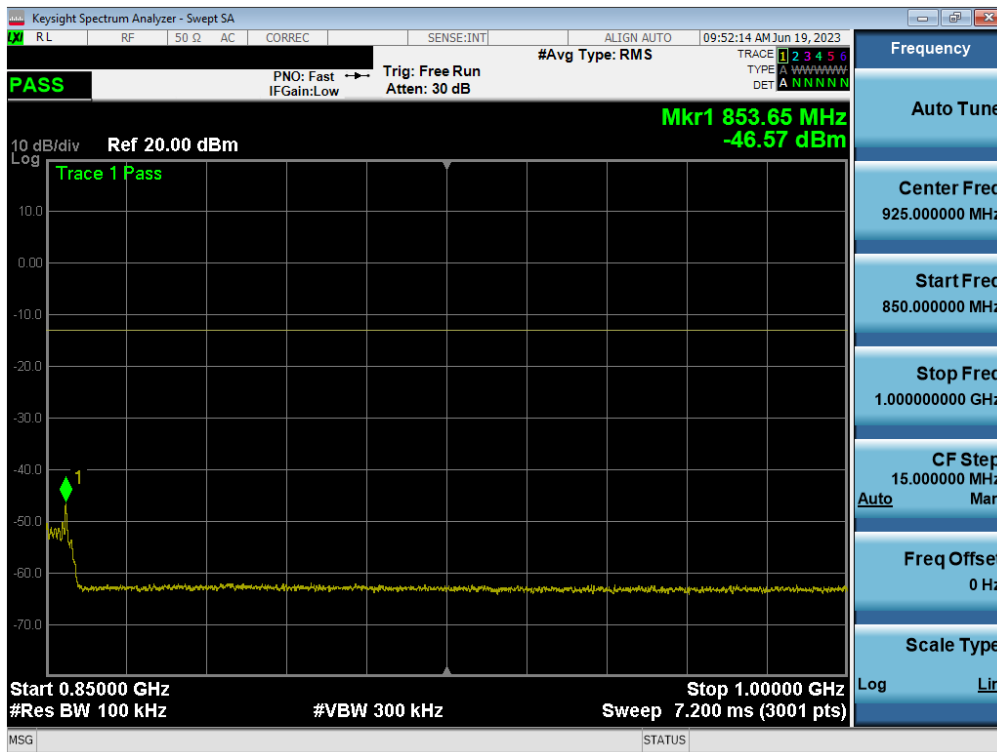

Plot 7-27. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - 1 RB - High Channel)


FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 28 of 65

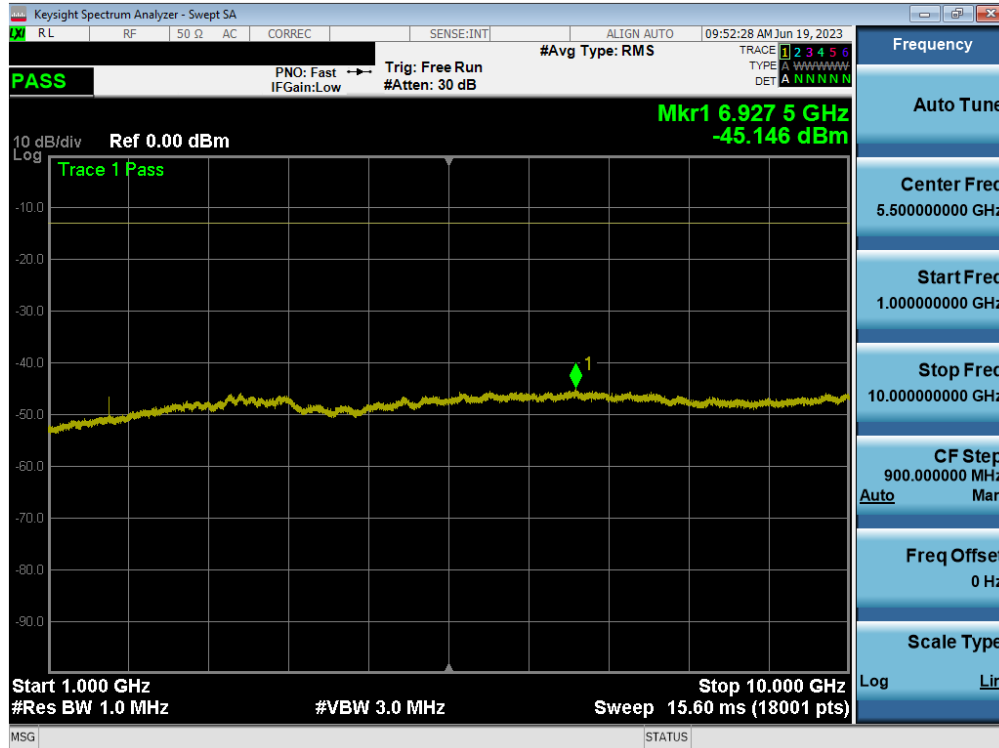


Plot 7-28. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - 1 RB - High Channel)

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 29 of 65

## NR Band n5

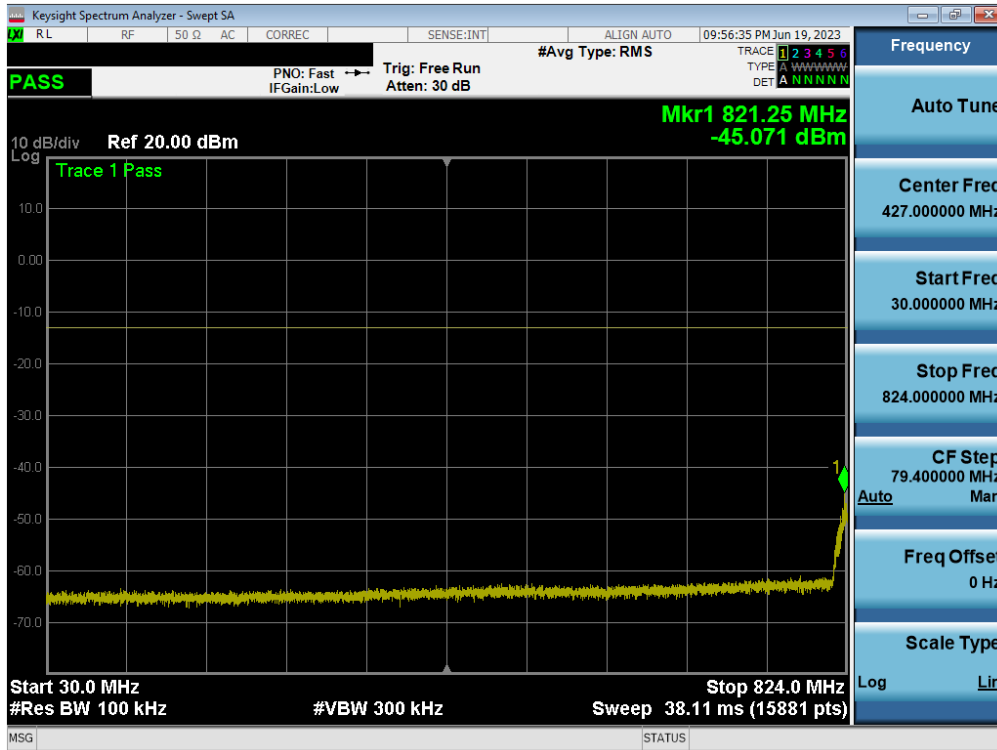


Plot 7-29. Conducted Spurious Plot (NR Band n5 - 20.0MHz - 1 RB - Low Channel)

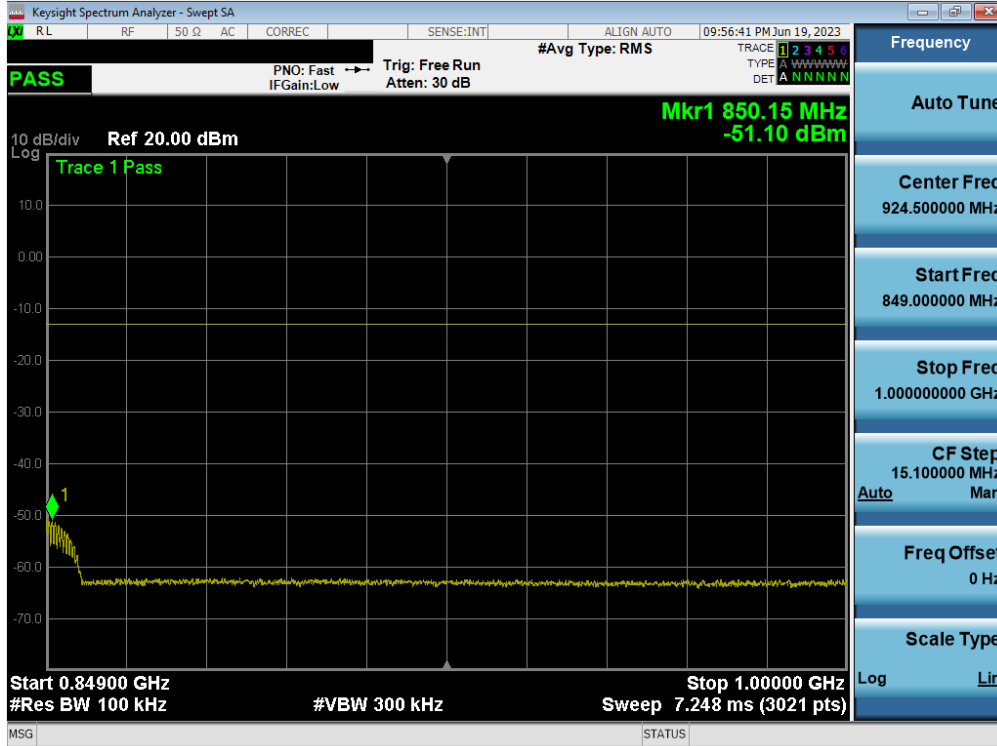

Plot 7-30. Conducted Spurious Plot (NR Band n5 - 20.0MHz - 1 RB - Low Channel)


FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 30 of 65

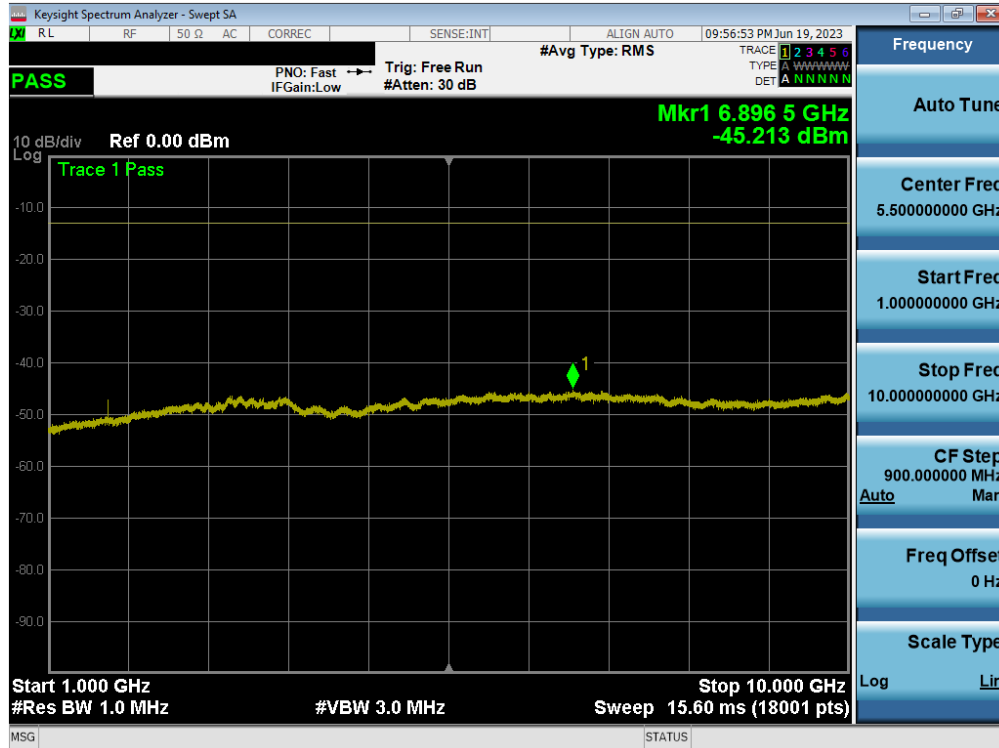


Plot 7-31. Conducted Spurious Plot (NR Band n5 - 20.0MHz - 1 RB - Low Channel)

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 31 of 65

# GSM/GPRS Cell

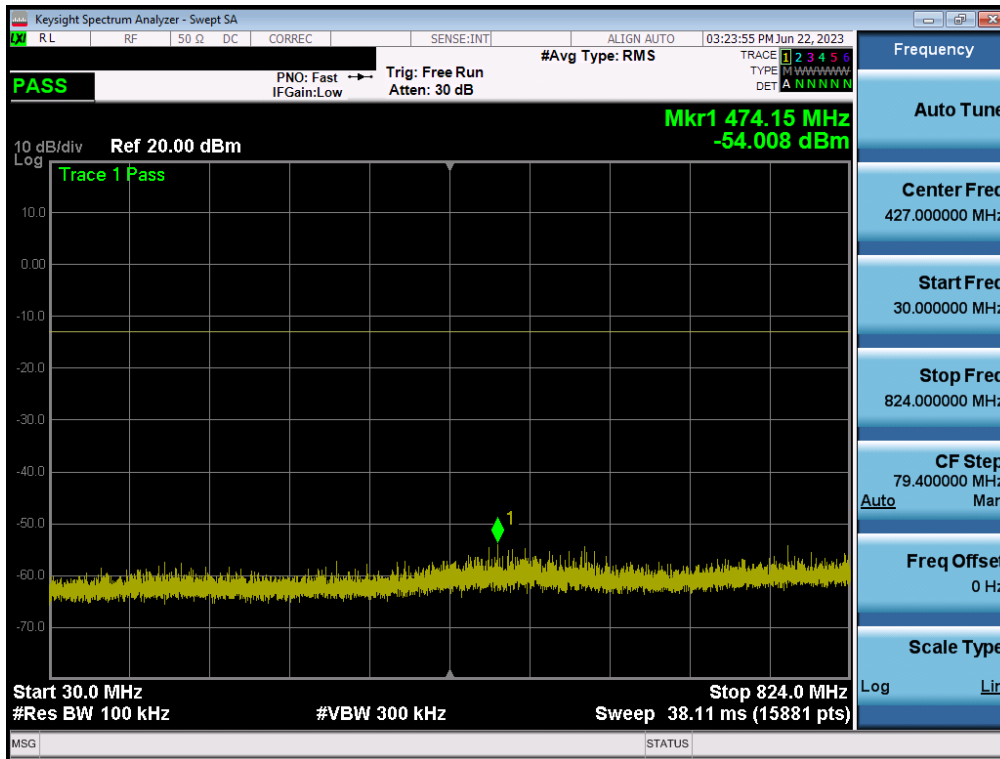


Plot 7-32. Conducted Spurious Plot (GPRS Ch. 251)

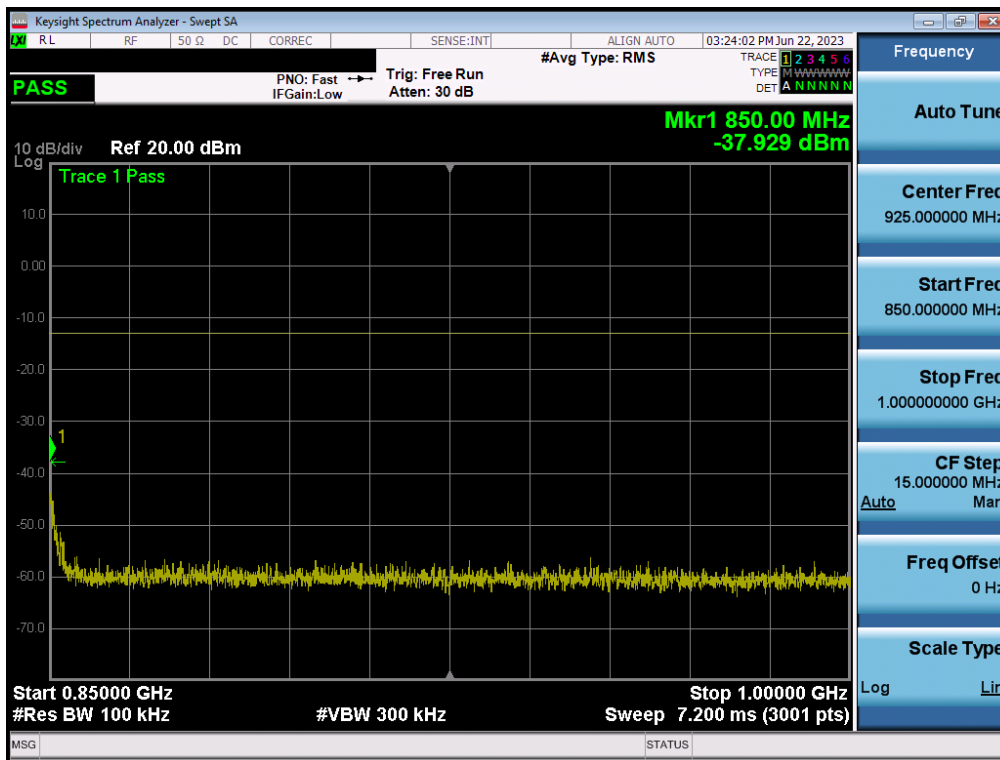

Plot 7-33. Conducted Spurious Plot (GPRS Ch. 251)

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 32 of 65




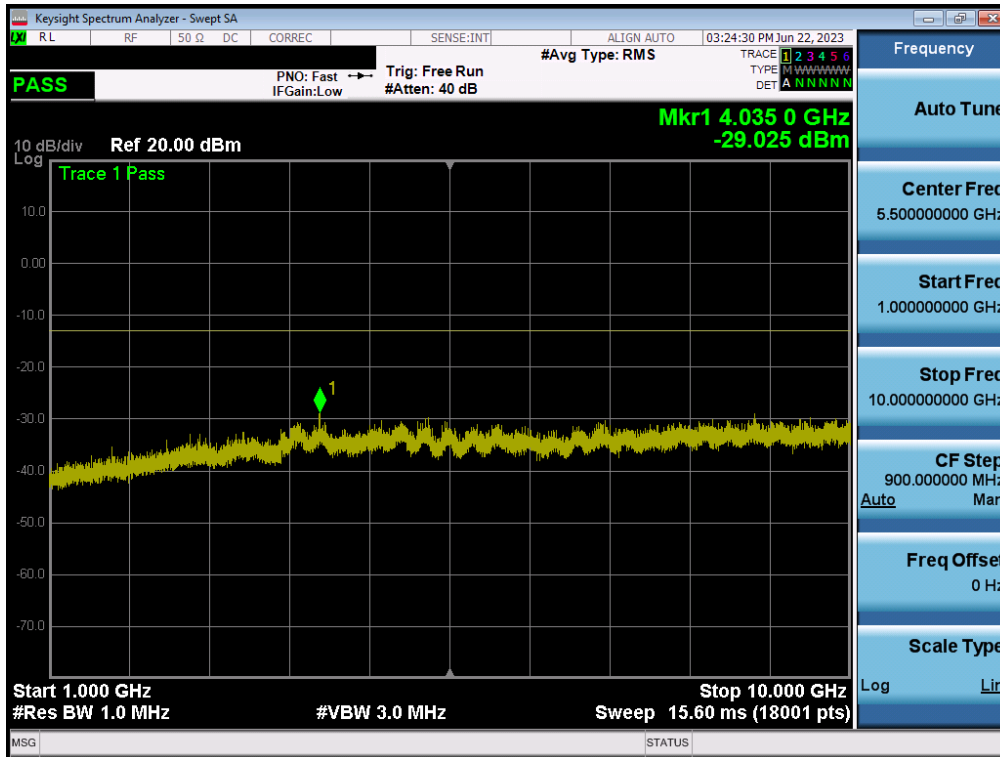


Plot 7-34. Conducted Spurious Plot (GPRS Ch. 251)

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 33 of 65

# WCDMA Cell

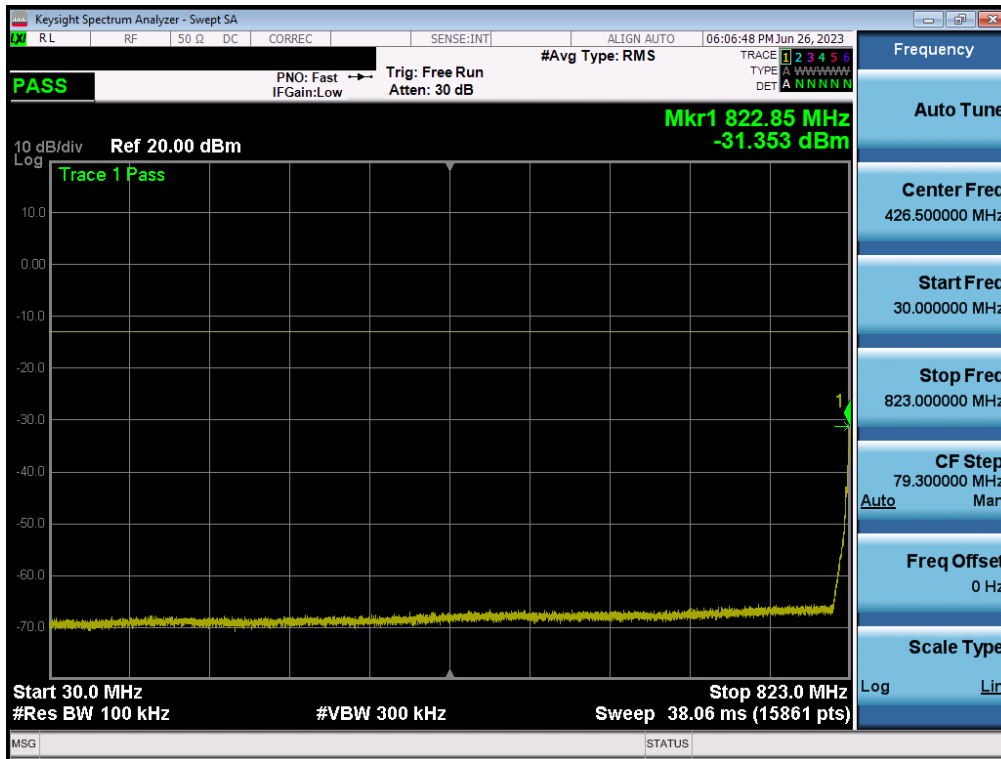


Plot 7-35. Conducted Spurious Plot (WCDMA Ch. 4132)

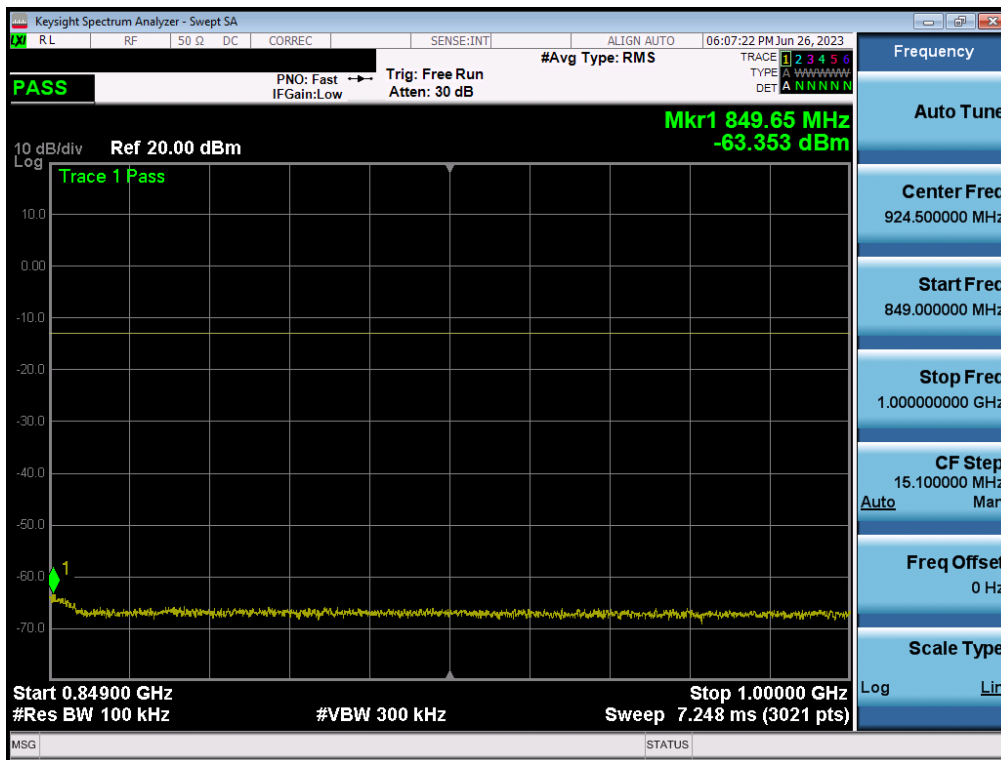

Plot 7-36. Conducted Spurious Plot (WCDMA Ch. 4132)

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 34 of 65

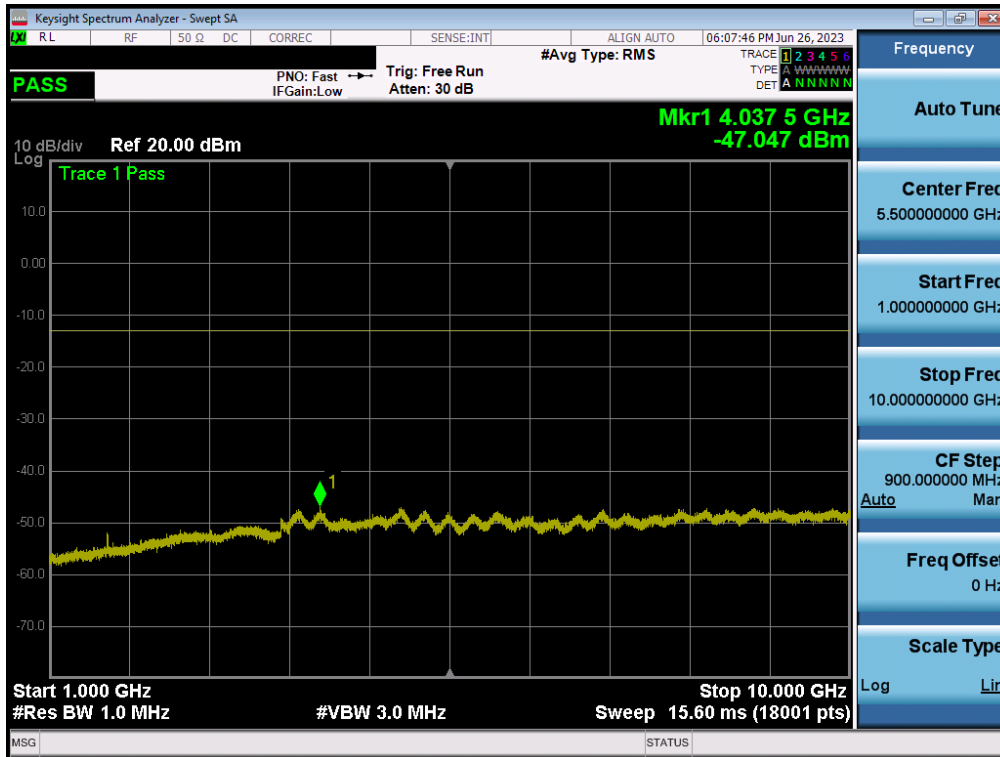

Plot 7-37. Conducted Spurious Plot (WCDMA Ch. 4132)

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 35 of 65

## 7.4 Band Edge Emissions at Antenna Terminal

### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The minimum permissible attenuation level of any spurious emission is  $43 + 10 \log_{10}(P_{[Watts]})$ , where P is the transmitter power in Watts.***

### Test Procedure Used


ANSI C63.26-2015 – Section 5.7.3

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW  $\geq$  1% of the emission bandwidth
4. VBW  $\geq$  3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq$  2 x Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

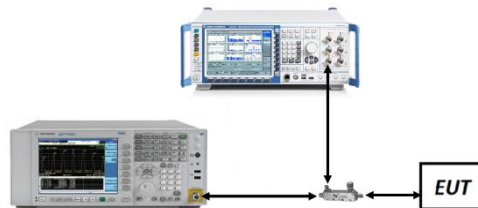

**Figure 7-3. Test Instrument & Measurement Setup**

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 36 of 65

V3.0 1/4/2022

**Test Notes**

1. Per 22.917(b), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
  
2. For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


<b>FCC ID:</b> A3LSMS711B	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2304260063-04.A3L	<b>Test Dates:</b> 5/30 - 7/31/2023	<b>EUT Type:</b> Portable Handset	Page 37 of 65

Mode	Bandwidth	Channel	Test Case	Level [dBm]	Limit [dBm]	Margin [dB]
GSM-Cell	250kHz	Low	Band Edge	-15.38	-13	-2.38
		High	Band Edge	-16.49	-13	-3.49
WCDMA-Cell	5MHz	Low	Band Edge	-19.30	-13	-6.30
		High	Band Edge	-20.38	-13	-7.38
LTE-B26-5	15 MHz	Low	Band Edge	-28.04	-13	-15.04
		High	Band Edge	-31.94	-13	-18.94
	10 MHz	Low	Band Edge	-27.58	-13	-14.58
		High	Band Edge	-29.84	-13	-16.84
	5 MHz	Low	Band Edge	-20.70	-13	-7.70
		High	Band Edge	-21.64	-13	-8.64
	3 MHz	Low	Band Edge	-17.82	-13	-4.82
		High	Band Edge	-18.38	-13	-5.38
	1.4 MHz	Low	Band Edge	-17.11	-13	-4.11
		High	Band Edge	-19.22	-13	-6.22
NR-n5	20 MHz	Low	Band Edge	-28.61	-13	-15.61
		High	Band Edge	-31.74	-13	-18.74
	15 MHz	Low	Band Edge	-28.32	-13	-15.32
		High	Band Edge	-31.26	-13	-18.26
	10 MHz	Low	Band Edge	-28.31	-13	-15.31
		High	Band Edge	-28.82	-13	-15.82
	5 MHz	Low	Band Edge	-22.34	-13	-9.34
		High	Band Edge	-25.30	-13	-12.30

**Table 7-4. Band Edge Emission Test Results**

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 38 of 65

### LTE Band 26/5

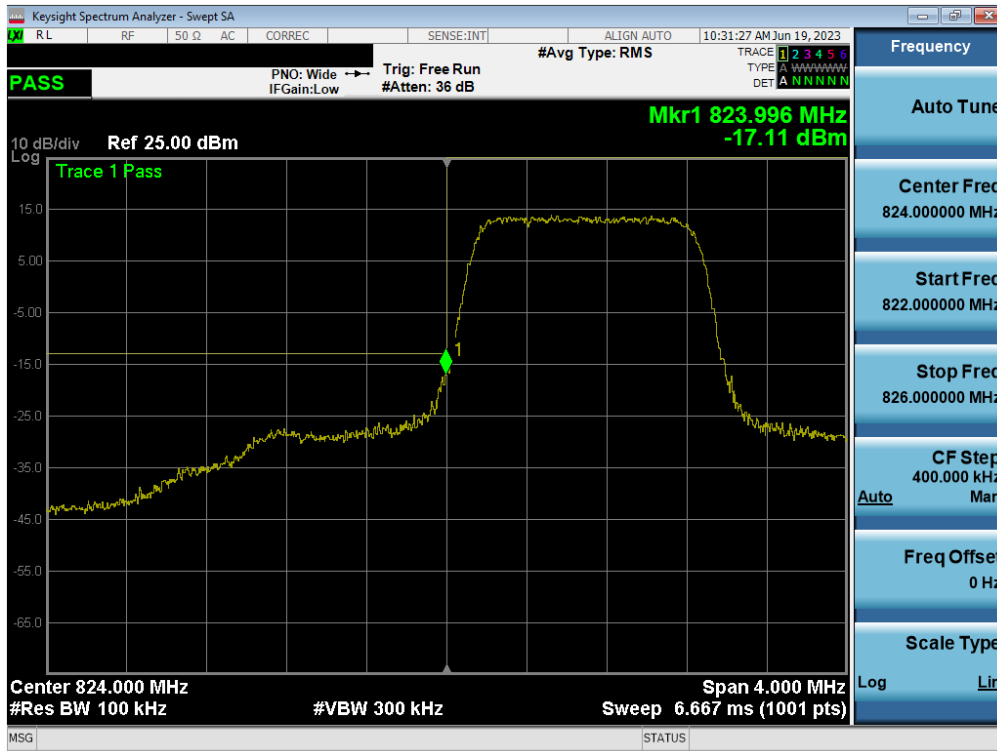


Plot 7-38. Lower Band Edge Plot (LTE Band 26/5 – 1.4MHz QPSK – Full RB)




Plot 7-39. Upper Band Edge Plot (LTE Band 26/5 – 1.4MHz QPSK – Full RB)

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 39 of 65

# NR Band n5

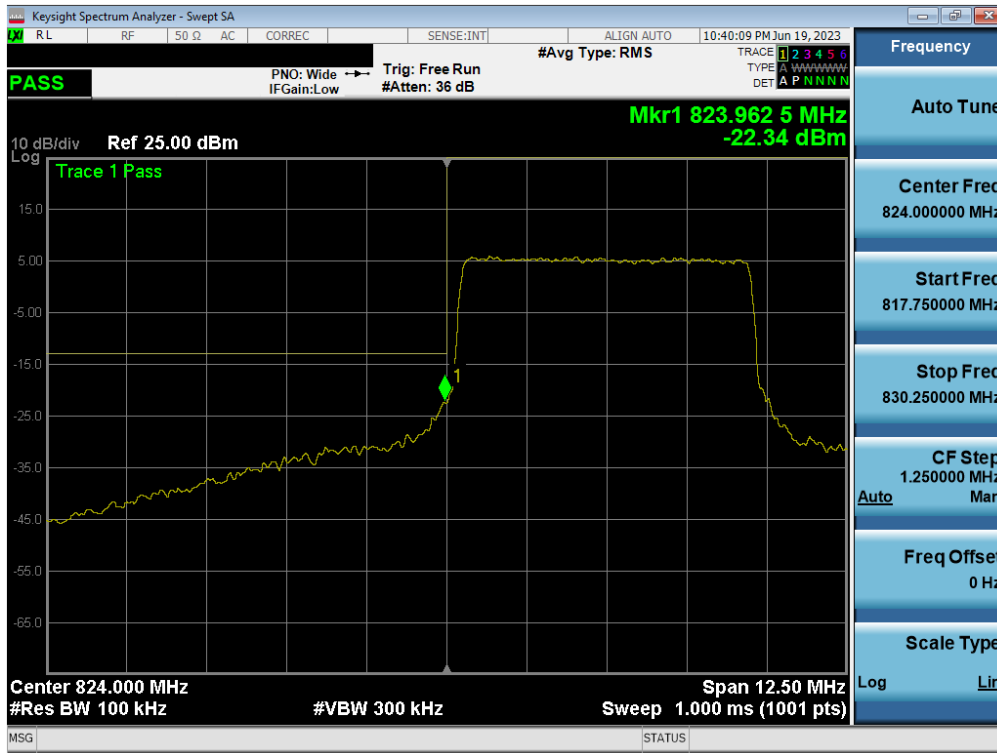

Plot 7-40. Lower Band Edge Plot (NR Band n5 – 5.0MHz - Full RB)

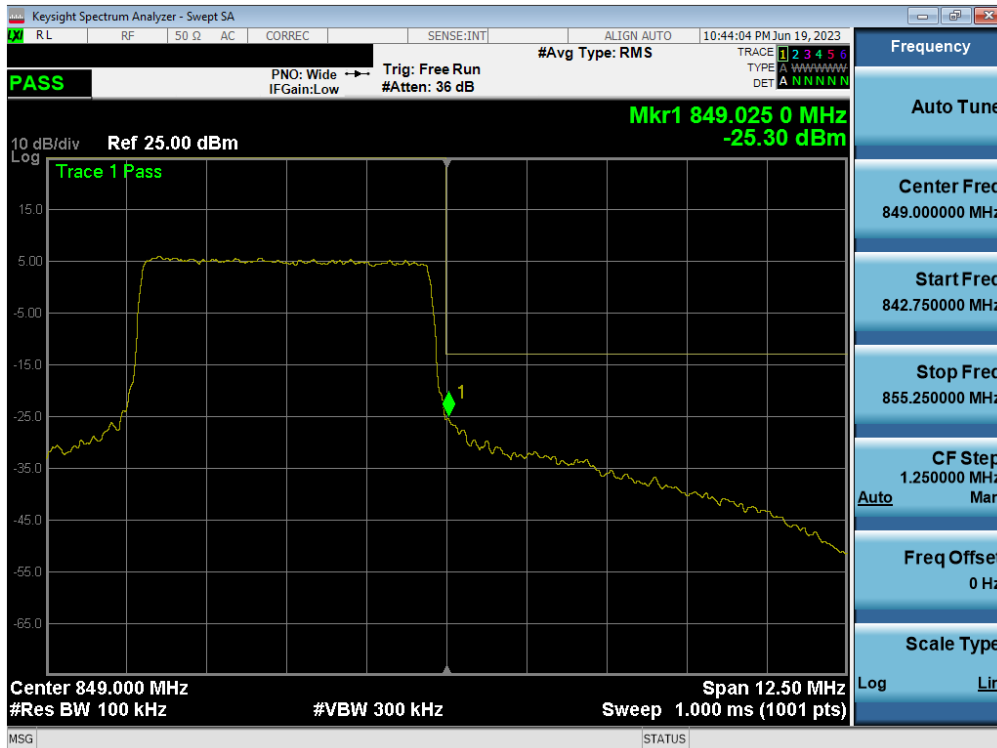


Plot 7-41. Upper Band Edge Plot (NR Band n5 – 5.0MHz - Full RB)


FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 40 of 65



# GSM/GPRS Cell

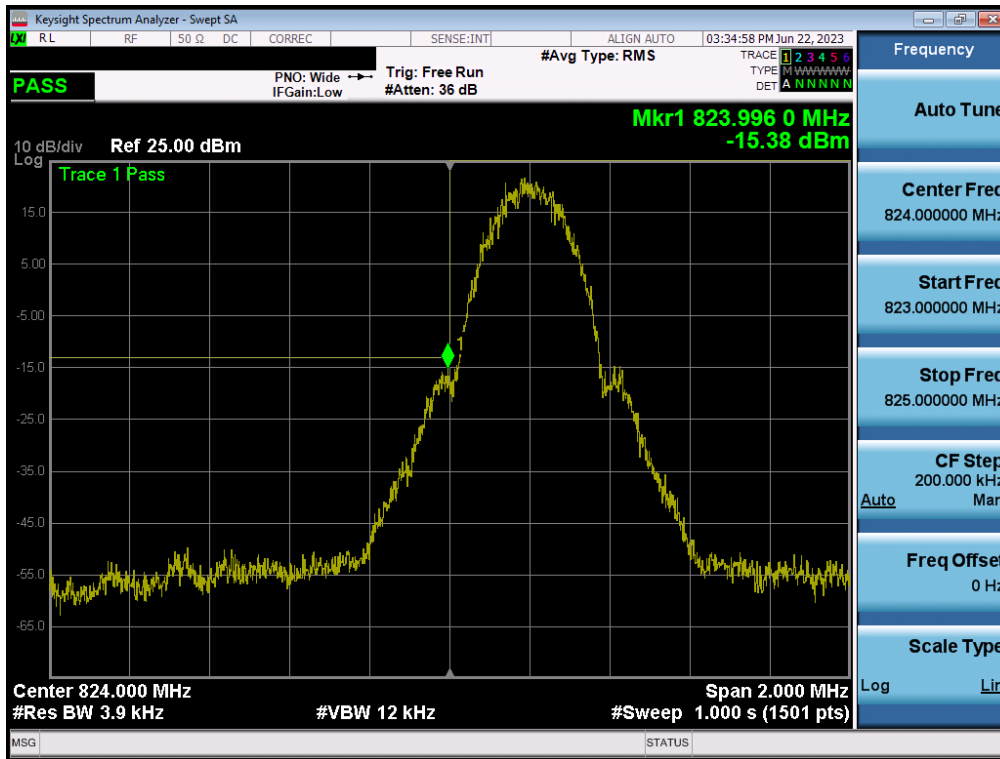


Plot 7-42. Lower Band Edge Plot (GPRS Cell – Ch. 128)

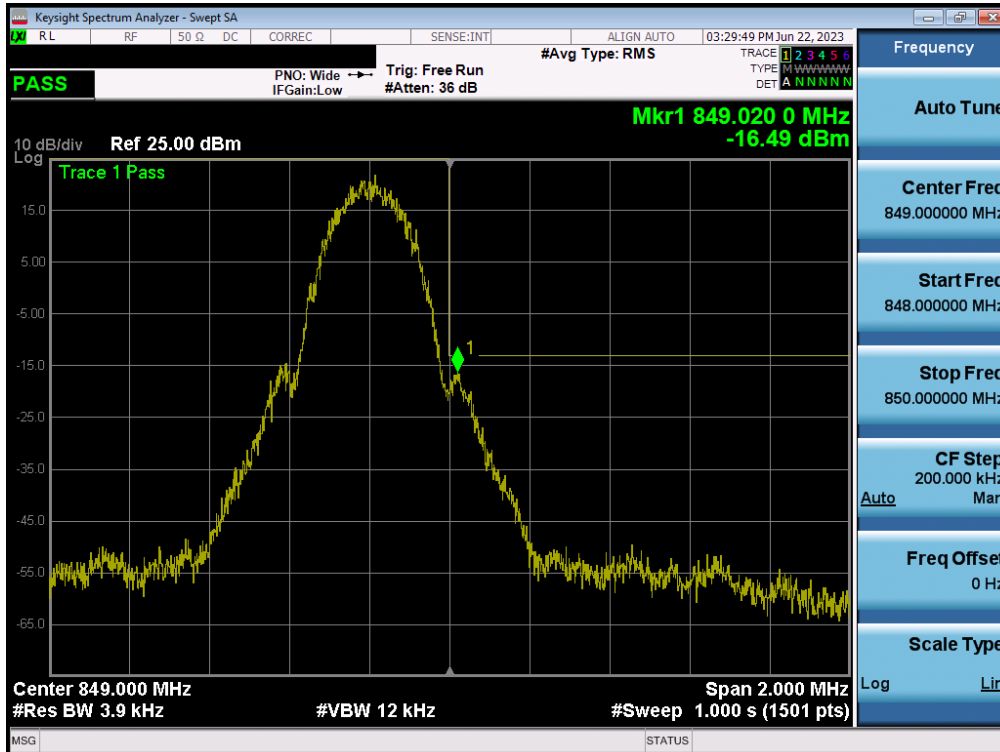

Plot 7-43. Upper Band Edge Plot (GPRS Cell – Ch. 251)

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 41 of 65

### WCDMA Cell

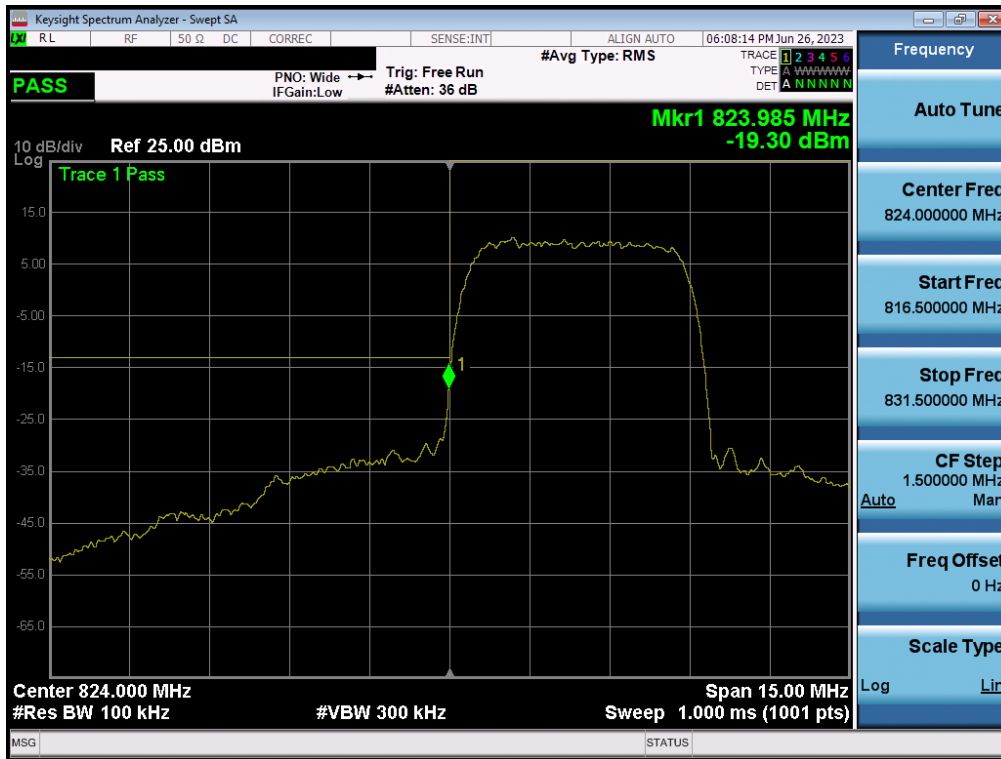

Plot 7-44. Lower Band Edge Plot (WCDMA Cell – Ch. 4132)



Plot 7-45. Upper Band Edge Plot (WCDMA Cell – Ch. 4233)

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 42 of 65

## 7.5 Radiated Power (ERP)

### Test Overview

Effective Radiated Power (ERP) measurements are performed using the substitution method described in ANSI C63.26-2015 with the EUT transmitting into an integral antenna. Measurements are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

ANSI C63.26-2015 – Section 5.2.4.4

### Test Settings


1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer’s “time domain power” measurement capability is used.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $\geq$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”. Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration.
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the “gating” function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize.

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 43 of 65


V3.0 1/4/2022

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

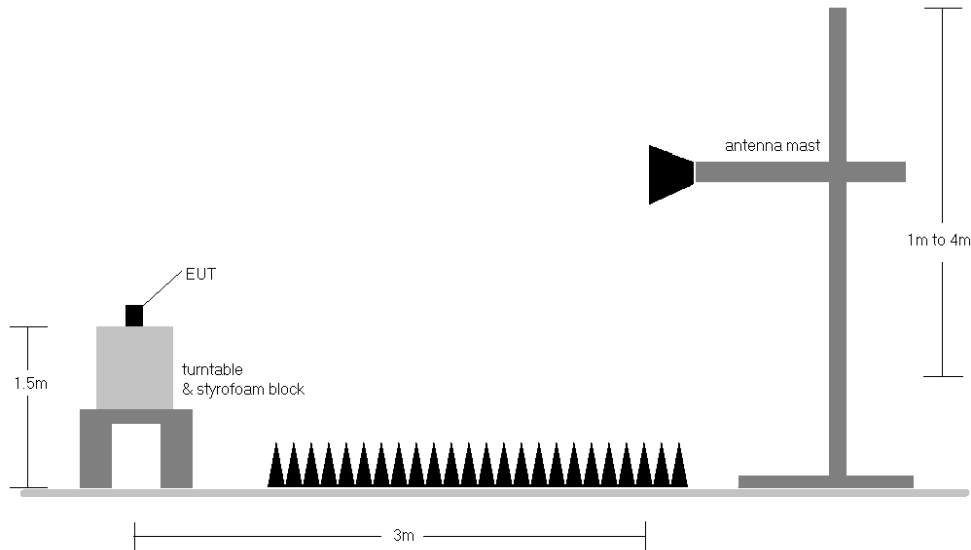

**Figure 7-4. Radiated Test Setup < 1GHz**

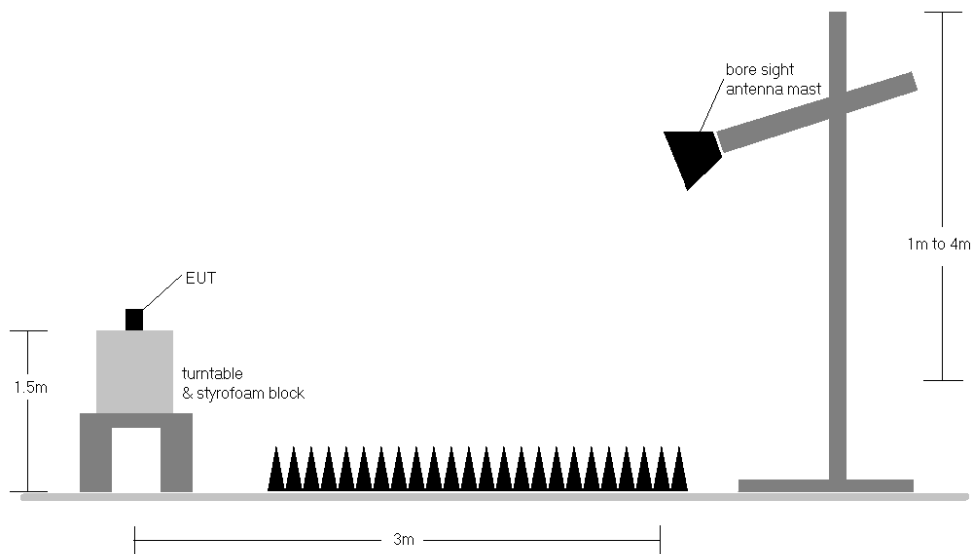

**Figure 7-5. Radiated Test Setup > 1GHz**

## Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest powers are reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest powers are reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1".

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 44 of 65

V3.0 1/4/2022



- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst-case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 4) This unit was tested with its standard battery.
- 5) For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

<b>FCC ID:</b> A3LSMS711B	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2304260063-04.A3L	<b>Test Dates:</b> 5/30 - 7/31/2023	<b>EUT Type:</b> Portable Handset	Page 45 of 65

V3.0 1/4/2022



## 7.6 Radiated Spurious Emissions Measurements

### Test Overview

Radiated spurious emissions measurements are performed using the field strength conversion method described in ANSI C63.26-2015 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using hybrid (biconical/log) antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

ANSI C63.26-2015 – Section 5.5.4

### Test Settings


1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq 2 \times$  span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 47 of 65


V3.0 1/4/2022

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

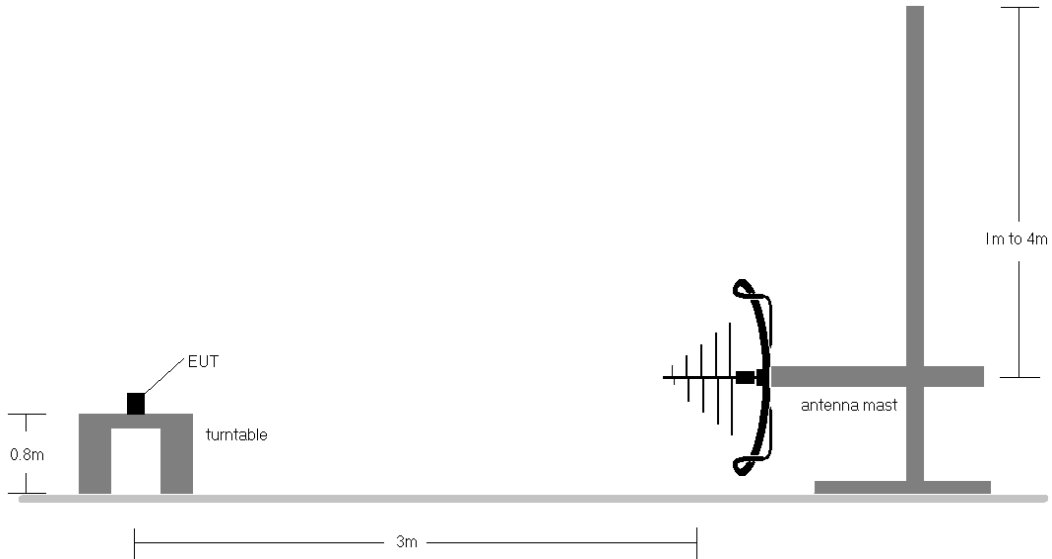

**Figure 7-6. Test Instrument & Measurement Setup < 1GHz**

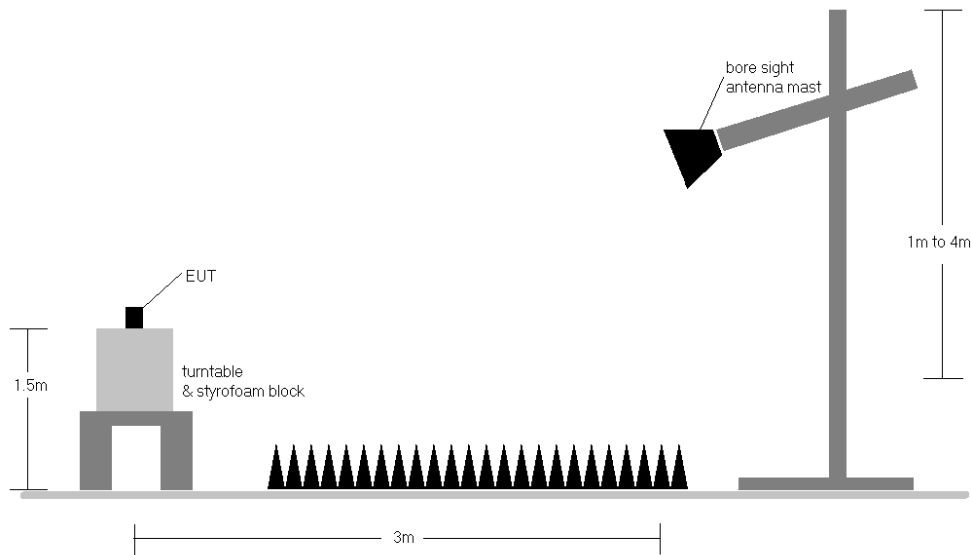

**Figure 7-7. Test Instrument & Measurement Setup > 1GHz**

<b>FCC ID:</b> A3LSMS711B	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2304260063-04.A3L	<b>Test Dates:</b> 5/30 - 7/31/2023	<b>EUT Type:</b> Portable Handset	Page 48 of 65




**Test Notes**


- 1) Field strengths are calculated using the Measurement quantity conversions in ANSI C63.26-2015 Section 5.2.7:
  - a)  $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
  - b)  $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$ ; where D is the measurement distance in meters.
- 2) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest powers are reported in GPRS mode while transmitting with one slot active.
- 3) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest powers are reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1".
- 4) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst-case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 5) This unit was tested with its standard battery.
- 6) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 7) Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1-meter test distance with the application of a distance correction factor.
- 8) The "-" shown in the following RSE tables are used to denote a noise floor measurement.
- 9) For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.
- 10) Spurious emission in EN-DC Operating mode with Sub 6GHz NR carrier as well as an LTE carrier (anchor) has been checked and was found to not to be the worst case.

<b>FCC ID:</b> A3LSMS711B	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2304260063-04.A3L	<b>Test Dates:</b> 5/30 - 7/31/2023	<b>EUT Type:</b> Portable Handset	Page 49 of 65

### LTE Band 26/5

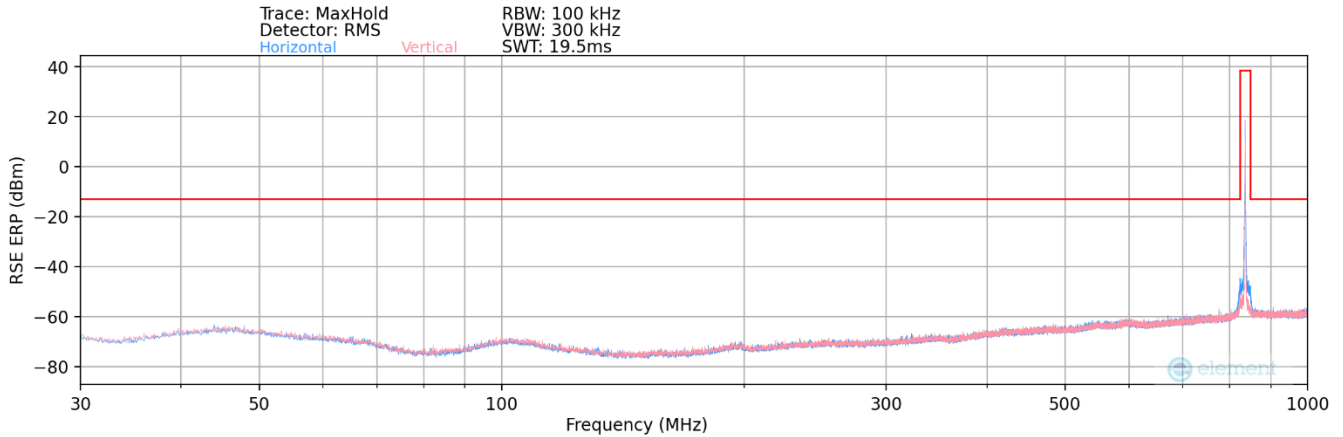

**Plot 7-46. Radiated Spurious Plot (LTE Band 26/5 – Below 1GHz)**

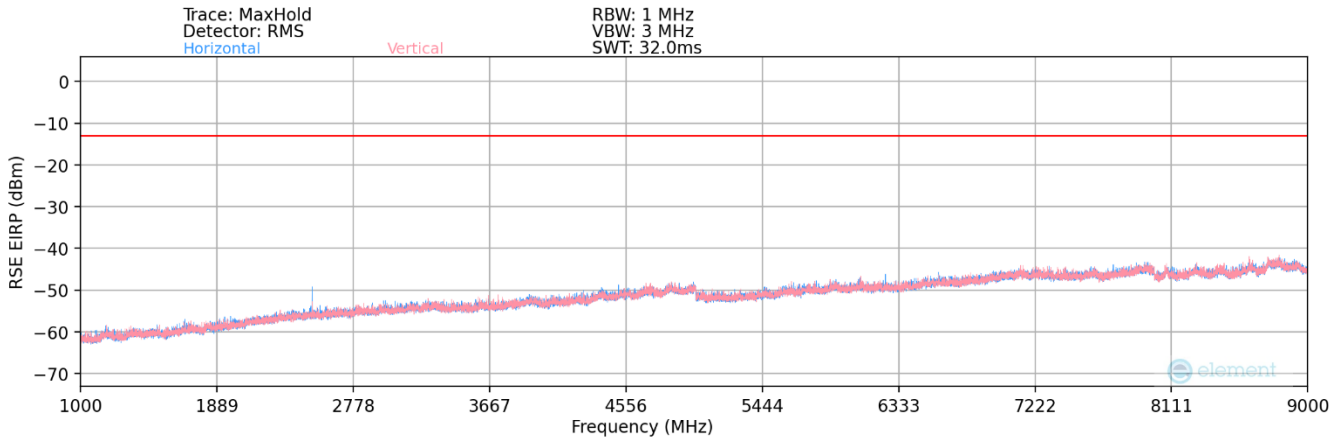

**Plot 7-47. Radiated Spurious Plot (LTE Band 26/5)**

<b>Bandwidth (MHz):</b>	10
<b>Frequency (MHz):</b>	836.5
<b>RB / Offset:</b>	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
503.22	H	-	-	-85.80	-4.36	16.84	-78.42	-13.00	-65.42

**Table 7-9. Radiated Spurious Data (LTE Band 26/5 – Below 1GHz)**

<b>FCC ID:</b> A3LSMS711B	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2304260063-04.A3L	<b>Test Dates:</b> 5/30 - 7/31/2023	<b>EUT Type:</b> Portable Handset	Page 50 of 65

Bandwidth (MHz):	10
Frequency (MHz):	829
RB / Offset:	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1658.00	H	135.00	187.00	-75.75	0.10	31.35	-63.90	-13.00	-50.90
2487.00	H	105.00	43.00	-72.21	4.09	38.88	-56.37	-13.00	-43.37
3316.00	H	-	-	-79.71	6.80	34.09	-61.17	-13.00	-48.17
4145.00	H	-	-	-80.37	8.03	34.66	-60.60	-13.00	-47.60
4974.00	H	-	-	-80.30	10.11	36.81	-58.45	-13.00	-45.45

**Table 7-10. Radiated Spurious Data (LTE Band 26/5 – Low Channel)**

Bandwidth (MHz):	10
Frequency (MHz):	836.5
RB / Offset:	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.00	H	142.00	185.00	-75.12	0.40	32.28	-62.98	-13.00	-49.98
2509.50	H	156.00	140.00	-70.04	4.08	41.04	-54.21	-13.00	-41.21
3346.00	H	-	-	-79.84	6.58	33.74	-61.52	-13.00	-48.52
4182.50	H	-	-	-80.41	8.03	34.62	-60.64	-13.00	-47.64
5019.00	H	-	-	-80.62	10.53	36.91	-58.35	-13.00	-45.35

**Table 7-11. Radiated Spurious Data (LTE Band 26/5 – Mid Channel)**


Bandwidth (MHz):	10
Frequency (MHz):	844
RB / Offset:	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1688.00	H	184.00	8.00	-76.85	0.53	30.68	-64.58	-13.00	-51.58
2532.00	H	164.00	29.00	-71.68	4.41	39.73	-55.53	-13.00	-42.53
3376.00	H	-	-	-79.63	6.31	33.68	-61.58	-13.00	-48.58
4220.00	H	-	-	-80.47	8.16	34.69	-60.57	-13.00	-47.57
5064.00	H	-	-	-80.46	10.40	36.94	-58.32	-13.00	-45.32


**Table 7-12. Radiated Spurious Data (LTE Band 26/5 – High Channel)**

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 51 of 65

### NR Band n5

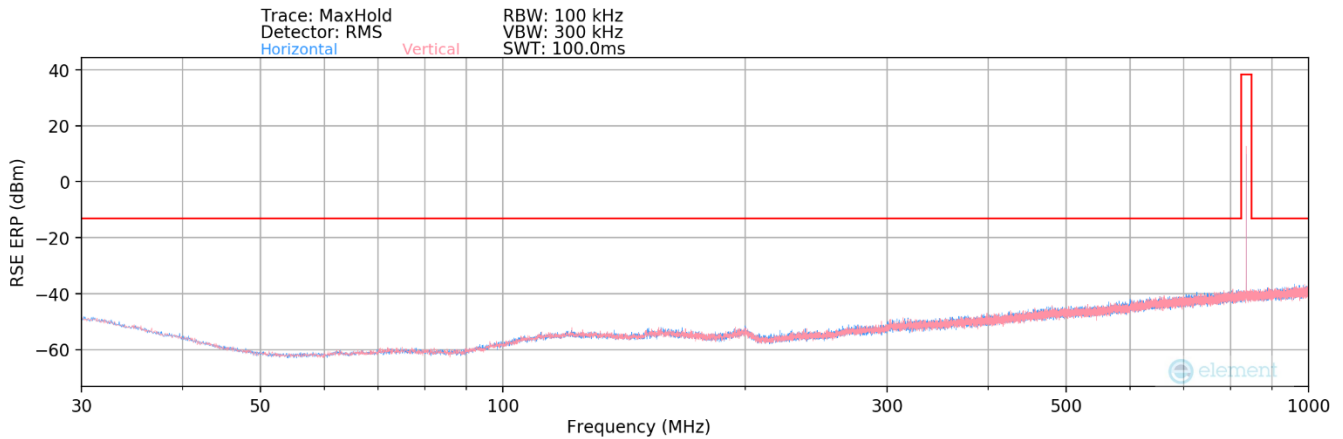

**Plot 7-48. Radiated Spurious Plot (NR Band n5 – Below 1GHz)**

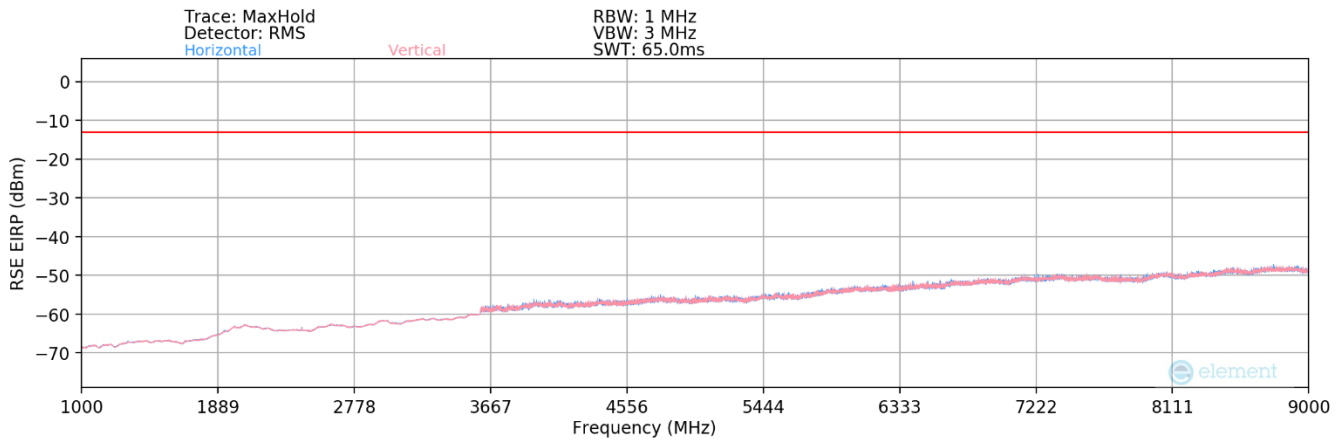

**Plot 7-49. Radiated Spurious Plot (NR Band n5)**

<b>Bandwidth (MHz):</b>	20
<b>Frequency (MHz):</b>	836.5
<b>RB / Offset:</b>	1 / 53
<b>Mode:</b>	Stand Alone

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
106.73	V	-	-	-83.23	18.98	42.75	-52.51	-13.00	-39.51
196.79	V	-	-	-83.21	19.61	43.40	-51.85	-13.00	-38.85
227.72	V	-	-	-83.28	18.47	42.19	-53.07	-13.00	-40.07

**Table 7-13. Radiated Spurious Data (NR Band n5 – Low Channel)**

<b>FCC ID:</b> A3LSMS711B	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2304260063-04.A3L	<b>Test Dates:</b> 5/30 - 7/31/2023	<b>EUT Type:</b> Portable Handset	Page 52 of 65



Bandwidth (MHz):	20
Frequency (MHz):	834
RB / Offset:	1 / 53
Mode:	Stand Alone

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1668.00	V	166.00	338.00	-73.19	-7.20	26.61	-68.65	-13.00	-55.65
2502.00	V	-	-	-76.14	-4.19	26.67	-68.58	-13.00	-55.58
3336.00	V	-	-	-76.72	-1.27	29.01	-66.25	-13.00	-53.25
4170.00	V	-	-	-77.49	1.37	30.88	-64.38	-13.00	-51.38

**Table 7-14. Radiated Spurious Data (NR Band n5 – Low Channel)**

Bandwidth (MHz):	20
Frequency (MHz):	836.5
RB / Offset:	1 / 53
Mode:	Stand Alone

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.00	V	139.00	228.00	-73.22	-7.13	26.65	-68.61	-13.00	-55.61
2509.50	V	-	-	-76.20	-4.07	26.73	-68.53	-13.00	-55.53
3346.00	V	-	-	-76.35	-1.25	29.40	-65.86	-13.00	-52.86
4182.50	V	-	-	-77.19	1.39	31.20	-64.06	-13.00	-51.06

**Table 7-15. Radiated Spurious Data (NR Band n5 – Mid Channel)**

Bandwidth (MHz):	20
Frequency (MHz):	839
RB / Offset:	1 / 53
Mode:	Stand Alone

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1678.00	V	159.00	336.00	-73.11	-7.07	26.82	-68.44	-13.00	-55.44
2517.00	V	-	-	-76.11	-3.93	26.96	-68.30	-13.00	-55.30
3356.00	V	-	-	-76.47	-1.22	29.31	-65.94	-13.00	-52.94
4195.00	V	-	-	-77.11	1.30	31.19	-64.07	-13.00	-51.07

**Table 7-16. Radiated Spurious Data (NR Band n5 – High Channel)**

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 53 of 65

V3.0 1/4/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.



<b>Case:</b>	w/ Wireless Charging Pad
<b>Bandwidth (MHz):</b>	20
<b>Frequency (MHz):</b>	839
<b>RB / Offset:</b>	1 / 53
<b>Mode:</b>	Stand Alone

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1678.00	V	-	-	-75.74	-7.07	24.19	-71.07	-13.00	-58.07
2517.00	V	-	-	-76.02	-3.93	27.05	-68.21	-13.00	-55.21
3356.00	V	-	-	-76.34	-1.22	29.44	-65.81	-13.00	-52.81
4195.00	V	-	-	-77.05	1.30	31.25	-64.01	-13.00	-51.01


**Table 7-17. Radiated Spurious Data with WCP (NR Band n5)**

<b>FCC ID:</b> A3LSMS711B	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2304260063-04.A3L	<b>Test Dates:</b> 5/30 - 7/31/2023	<b>EUT Type:</b> Portable Handset	Page 54 of 65


V3.0 1/4/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

### GSM/GPRS Cell

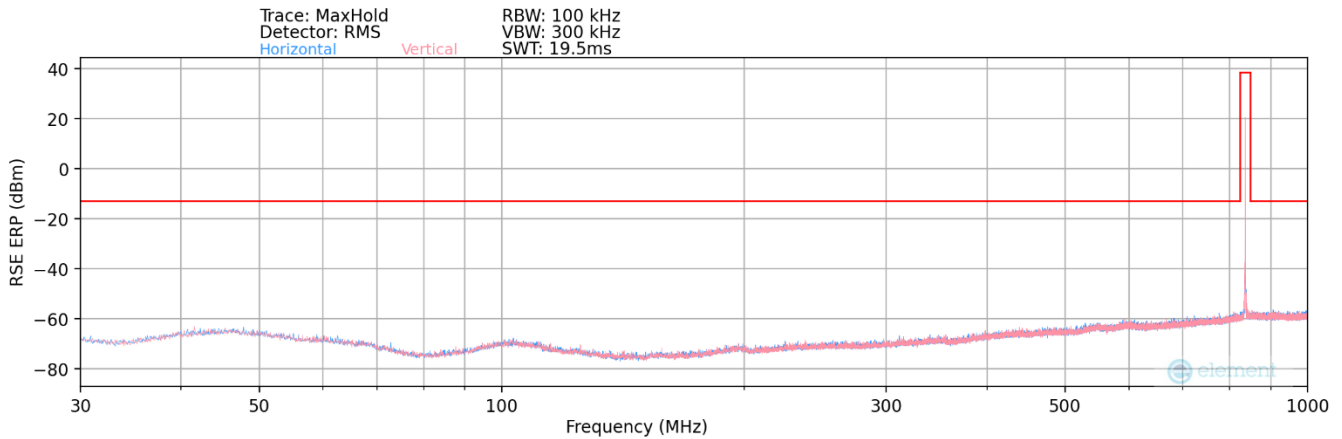

**Plot 7-50. Radiated Spurious Plot (GPRS Cell – Below 1GHz)**

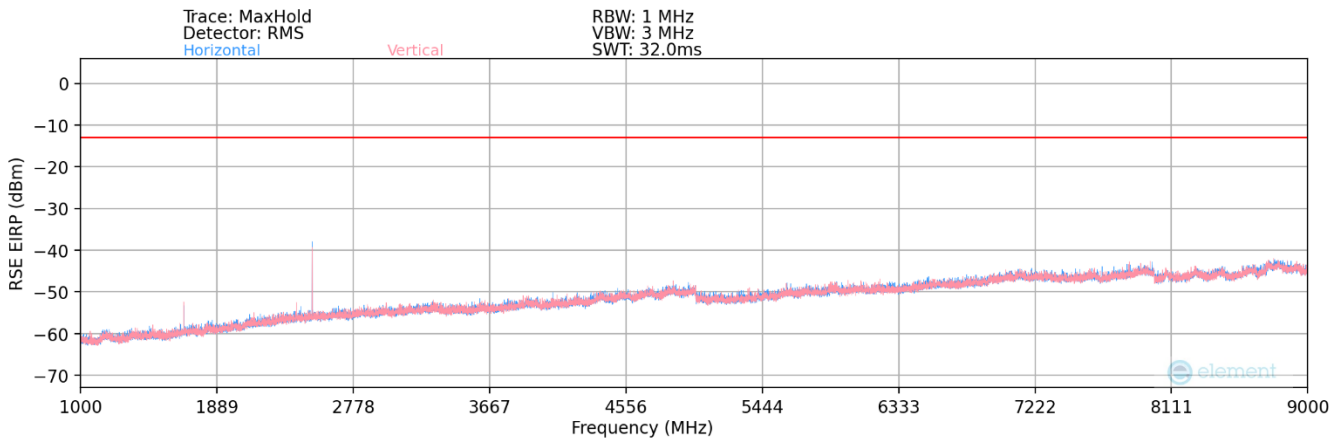

**Plot 7-51. Radiated Spurious Plot (GPRS Cell)**

<b>Mode:</b>	GPRS 1 Tx Slot
<b>Channel:</b>	251
<b>Frequency (MHz):</b>	848.8

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
334.88	H	-	-	-68.13	-7.59	31.28	-63.98	-13.00	-50.98

**Table 7-18. Radiated Spurious Data (GPRS Cell – Below 1GHz)**

<b>FCC ID:</b> A3LSMS711B	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2304260063-04.A3L	<b>Test Dates:</b> 5/30 - 7/31/2023	<b>EUT Type:</b> Portable Handset	Page 55 of 65

<b>Mode:</b>	GPRS 1 Tx Slot
<b>Channel:</b>	128
<b>Frequency (MHz):</b>	824.2

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1648.40	H	295.00	206.00	-64.33	-0.19	42.48	-52.78	-13.00	-39.78
2472.60	H	108.00	326.00	-59.44	4.00	51.56	-43.70	-13.00	-30.70
3296.80	H	-	-	-70.56	6.50	42.94	-52.32	-13.00	-39.32
4121.00	H	-	-	-71.28	8.02	43.74	-51.51	-13.00	-38.51
4945.20	H	-	-	-70.92	9.53	45.61	-49.65	-13.00	-36.65

**Table 7-19. Radiated Spurious Data (GPRS Cell – Low Channel)**

<b>Mode:</b>	GPRS 1 Tx Slot
<b>Channel:</b>	190
<b>Frequency (MHz):</b>	836.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.20	H	132.00	213.00	-60.19	0.40	47.21	-48.05	-13.00	-35.05
2509.80	H	157.00	220.00	-53.06	4.08	58.02	-37.23	-13.00	-24.23
3346.40	H	-	-	-70.48	6.58	43.10	-52.16	-13.00	-39.16
4183.00	H	102.00	20.00	-70.34	8.03	44.69	-50.57	-13.00	-37.57
5019.60	H	-	-	-71.51	10.53	46.02	-49.24	-13.00	-36.24
5856.20	H	-	-	-72.23	11.65	46.42	-48.84	-13.00	-35.84
6692.80	H	-	-	-72.67	13.78	48.11	-47.15	-13.00	-34.15

**Table 7-20. Radiated Spurious Data (GPRS Cell – Mid Channel)**

<b>Mode:</b>	GPRS 1 Tx Slot
<b>Channel:</b>	251
<b>Frequency (MHz):</b>	848.8

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1697.60	H	189.00	21.00	-64.78	0.64	42.86	-52.39	-13.00	-39.39
2546.40	H	109.00	213.00	-53.01	4.21	58.20	-37.06	-13.00	-24.06
3395.20	H	-	-	-70.76	6.24	42.48	-52.78	-13.00	-39.78
4244.00	H	105.00	6.00	-69.97	8.44	45.47	-49.78	-13.00	-36.78
5092.80	H	-	-	-71.37	10.11	45.74	-49.52	-13.00	-36.52
5941.60	H	-	-	-72.33	12.18	46.85	-48.41	-13.00	-35.41
6790.40	H	-	-	-73.28	14.39	48.11	-47.15	-13.00	-34.15

**Table 7-21. Radiated Spurious Data (GPRS Cell – High Channel)**

<b>FCC ID:</b> A3LSMS711B	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2304260063-04.A3L	<b>Test Dates:</b> 5/30 - 7/31/2023	<b>EUT Type:</b> Portable Handset	Page 56 of 65





<b>Case:</b>	w/ Wireless Charging Pad
<b>Mode:</b>	GPRS 1 Tx Slot
<b>Channel:</b>	251
<b>Frequency (MHz):</b>	848.8

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
0.00	H	181.00	34.00	-65.68	0.64	41.96	-53.29	-13.00	-40.29
0.00	H	158.00	217.00	-54.01	4.21	57.20	-38.06	-13.00	-25.06
0.00	H	-	-	-70.96	6.24	42.28	-52.98	-13.00	-39.98
0.00	H	57.00	-30.00	-70.57	8.44	44.87	-50.38	-13.00	-37.38
0.00	H	-	-	-71.07	10.11	46.04	-49.22	-13.00	-36.22
0.00	H	-	-	-72.43	12.18	46.75	-48.51	-13.00	-35.51
6790.40	H	-	-	-73.29	14.39	48.10	-47.16	-13.00	-34.16


**Table 7-22. Radiated Spurious Data with WCP (GPRS Cell)**

<b>FCC ID:</b> A3LSMS711B	<b>PART 22 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2304260063-04.A3L	<b>Test Dates:</b> 5/30 - 7/31/2023	<b>EUT Type:</b> Portable Handset	Page 57 of 65


V3.0 1/4/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## WCDMA Cell

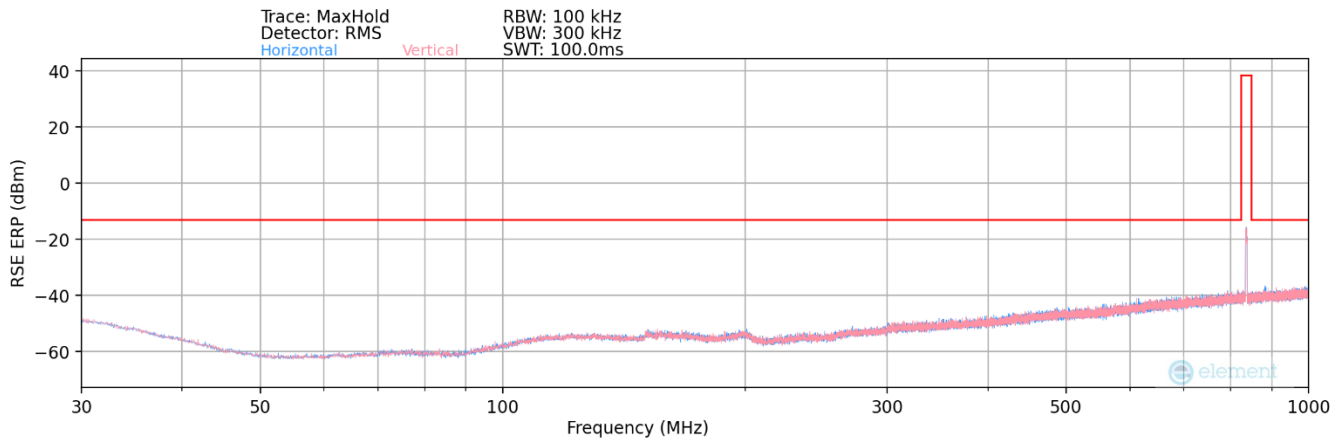

**Plot 7-52. Radiated Spurious Plot (WCDMA Cell – Below 1GHz)**

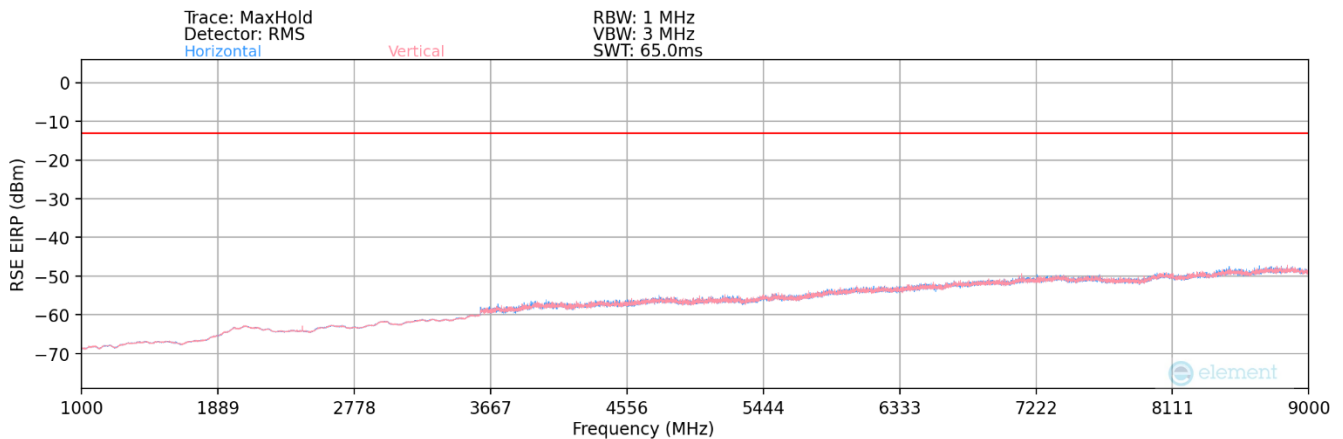

**Plot 7-53. Radiated Spurious Plot (WCDMA Cell)**

Mode:	WCDMA RMC
Channel:	4183
Frequency (MHz):	836.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
440.00	H	-	-	-85.26	24.85	46.59	-48.67	-13.00	-35.67
510.00	H	-	-	-82.63	26.16	50.53	-44.72	-13.00	-31.72

**Table 7-23. Radiated Spurious Data (WCDMA Cell – Below 1GHz)**

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 58 of 65

Mode:	WCDMA RMC
Channel:	4132
Frequency (MHz):	826.4

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1652.80	H	-	-	-76.21	-7.37	23.42	-71.84	-13.00	-58.84
2479.20	H	-	-	-77.43	-4.39	25.18	-70.07	-13.00	-57.07
3305.60	H	-	-	-77.41	-1.12	28.47	-66.78	-13.00	-53.78

**Table 7-24. Radiated Spurious Data (WCDMA Cell – Low Channel)**

Mode:	WCDMA RMC
Channel:	4183
Frequency (MHz):	836.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.20	H	-	-	-76.32	-7.13	23.55	-71.71	-13.00	-58.71
2509.80	H	-	-	-77.48	-4.06	25.46	-69.80	-13.00	-56.80
3346.40	H	-	-	-77.66	-1.25	28.09	-67.17	-13.00	-54.17

**Table 7-25. Radiated Spurious Data (WCDMA Cell – Mid Channel)**

Mode:	WCDMA RMC
Channel:	4233
Frequency (MHz):	846.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1693.20	H	-	-	-76.21	-6.86	23.93	-71.33	-13.00	-58.33
2539.80	H	-	-	-77.46	-3.39	26.15	-69.10	-13.00	-56.10
3386.40	H	-	-	-77.23	-1.15	28.62	-66.64	-13.00	-53.64

**Table 7-26. Radiated Spurious Data (WCDMA Cell – High Channel)**

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 59 of 65



## 7.7 Frequency Stability / Temperature Variation

### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

***For Part 22, the frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency.***

### Test Procedure Used

ANSI C63.26-2015 – Section 5.6

### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.


### Test Notes

None

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 60 of 65

LTE Band 26/5					
		Operating Frequency (Hz):		836,500,000	
		Ref. Voltage (VDC):		4.43	
		Deviation Limit:		± 0.00025% or 2.5 ppm	
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.43	- 30	836,586,882	-1,002	-0.0001198
		- 20	836,587,111	-773	-0.0000924
		- 10	836,588,482	598	0.0000715
		0	836,588,144	260	0.0000311
		+ 10	836,588,017	133	0.0000159
		+ 20 (Ref)	836,587,884	0	0.0000000
		+ 30	836,588,147	263	0.0000314
		+ 40	836,588,187	303	0.0000362
Battery Endpoint	3.27	+ 20	836,586,421	-1,463	-0.0001749

Table 7-27. LTE Band 26/5 Frequency Stability Data

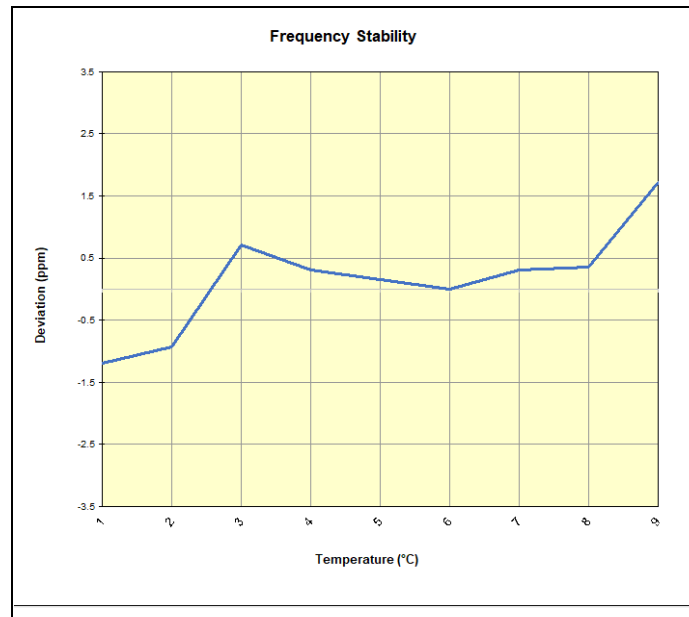


Plot 7-54. LTE Band 26/5 Frequency Stability Chart

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 61 of 65

NR Band n5					
Operating Frequency (Hz):		836,500,000			
Ref. Voltage (VDC):		4.43			
Deviation Limit:		± 0.00025% or 2.5 ppm			
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.43	- 30	836,544,483	-1,145	-0.0001369
		- 20	836,544,981	-647	-0.0000773
		- 10	836,544,971	-657	-0.0000785
		0	836,545,873	245	0.0000293
		+ 10	836,545,697	69	0.0000082
		+ 20 (Ref)	836,545,628	0	0.0000000
		+ 30	836,546,084	456	0.0000545
		+ 40	836,546,742	1,114	0.0001332
Battery Endpoint	3.27	+ 20	836,546,326	698	0.0000834

Table 7-28. NR Band n5 Frequency Stability Data

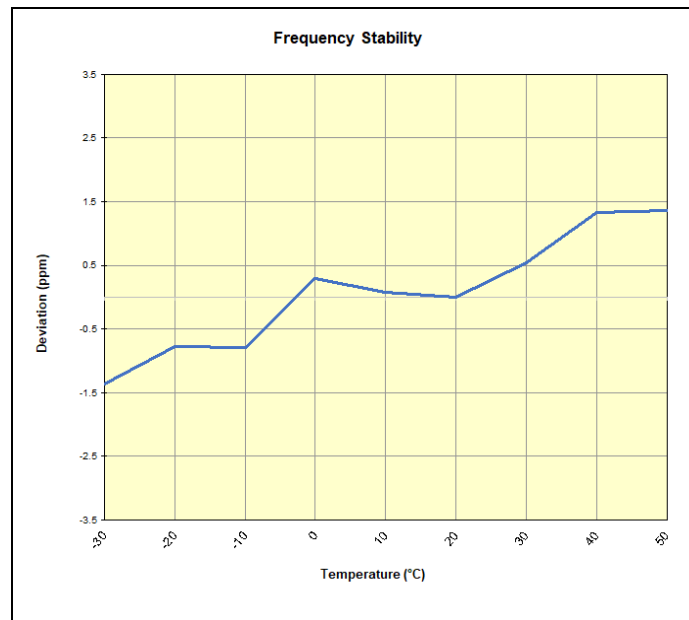


Plot 7-55. NR Band n5 Frequency Stability Chart

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 62 of 65

GSM/GPRS Cellular					
Operating Frequency (Hz):		836,600,000			
Ref. Voltage (VDC):		4.43			
Deviation Limit:		± 0.00025% or 2.5 ppm			
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.43	- 30	836,614,015	-241	-0.0000288
		- 20	836,614,270	14	0.0000017
		- 10	836,614,779	523	0.0000625
		0	836,614,922	666	0.0000796
		+ 10	836,614,503	247	0.0000295
		+ 20 (Ref)	836,614,256	0	0.0000000
		+ 30	836,614,111	-145	-0.0000173
		+ 40	836,614,903	647	0.0000773
		+ 50	836,615,155	899	0.0001075
Battery Endpoint	3.27	+ 20	836,615,258	1,002	0.0001198

Table 7-29. GSM/GPRS Cell Frequency Stability Data

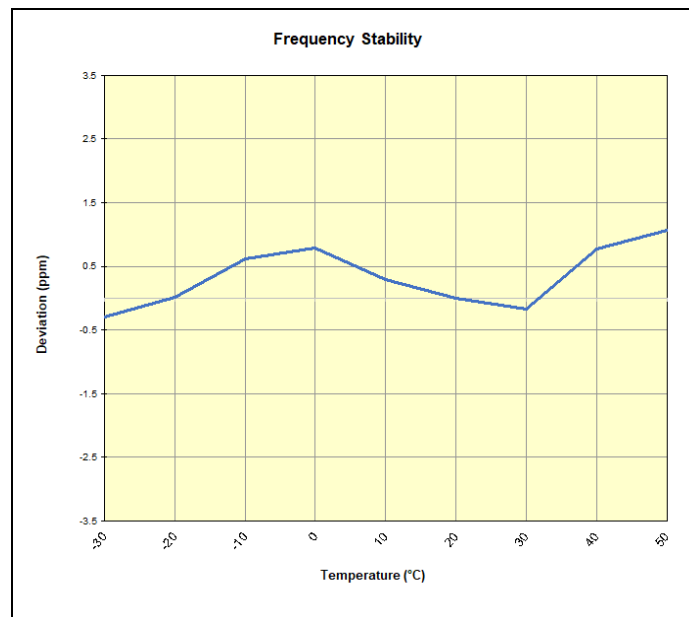


Plot 7-56. GSM/GPRS Cell Frequency Stability Chart

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 63 of 65

WCDMA Cellular					
Operating Frequency (Hz):		836,600,000			
Ref. Voltage (VDC):		4.43			
Deviation Limit:		± 0.00025% or 2.5 ppm			
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.43	- 30	836,621,334	-321	-0.0000384
		- 20	836,621,128	-527	-0.0000630
		- 10	836,621,681	26	0.0000031
		0	836,622,886	1,231	0.0001471
		+ 10	836,622,202	547	0.0000654
		+ 20 (Ref)	836,621,655	0	0.0000000
		+ 30	836,621,399	-256	-0.0000306
		+ 40	836,621,814	159	0.0000190
		+ 50	836,622,309	654	0.0000782
Battery Endpoint	3.27	+ 20	836,621,408	-247	-0.0000295

Table 7-30. WCDMA Cell Frequency Stability Data

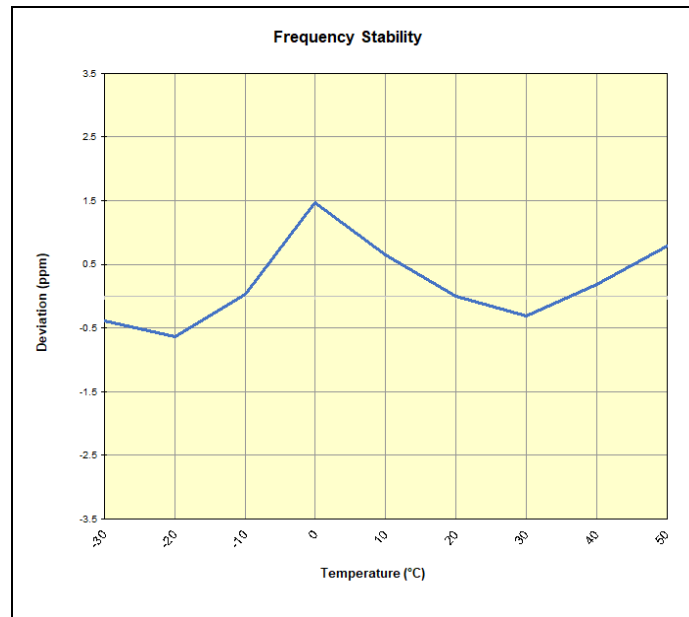

Plot 7-57. WCDMA Cell Frequency Stability Chart

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 64 of 65



## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMS711B** complies with all the requirements of Part 22 of the FCC rules.

FCC ID: A3LSMS711B	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-04.A3L	Test Dates: 5/30 - 7/31/2023	EUT Type: Portable Handset	Page 65 of 65

V3.0 1/4/2022