

**MEASUREMENT REPORT
FCC PART 15.407 802.11ax (OFDMA)**

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:
5/30 - 8/9/2023
Test Report Issue Date:
8/9/2023
Test Site/Location:
Element lab., Columbia, MD, USA
Test Report Serial No.:
1M2304260063-16.A3L

FCC ID:	A3LSMS711B
APPLICANT:	Samsung Electronics Co., Ltd.

Application Type: Certification
Model: SM-S711B/DS
Additional Model(s): SM-S711B
EUT Type: Portable Handset
Frequency Range: 5180 – 5885MHz
Modulation Type: OFDMA
FCC Equipment Class: Unlicensed National Information Infrastructure TX (NII)
FCC Rule Part(s): Part 15 Subpart E (15.407)
Test Procedure(s): ANSI C63.10-2013, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez
Executive Vice President



FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 1 of 154

T A B L E O F C O N T E N T S

1.0	INTRODUCTION	4
1.1	Scope.....	4
1.2	Element Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Antenna Description.....	8
2.4	Test Configuration.....	8
2.5	Software and Firmware	8
2.6	EMI Suppression Device(s) / Modifications.....	8
3.0	DESCRIPTION OF TESTS	9
3.1	Evaluation Procedure	9
3.2	Radiated Emissions.....	9
3.3	Environmental Conditions.....	9
4.0	ANTENNA REQUIREMENTS	10
5.0	MEASUREMENT UNCERTAINTY	11
6.0	TEST EQUIPMENT CALIBRATION DATA.....	12
7.0	TEST RESULTS	13
7.1	Summary.....	13
7.2	26dB Bandwidth Measurement.....	14
7.2.1	MIMO Antenna-1 26dB Bandwidth Measurements.....	19
7.2.2	MIMO Antenna-2 26dB Bandwidth Measurements.....	30
7.3	6dB Bandwidth Measurement	41
7.3.1	MIMO Antenna-1 6dB Bandwidth Measurements	45
7.3.2	MIMO Antenna-2 6dB Bandwidth Measurements	52
7.4	UNII Output Power Measurement.....	59
7.5	Maximum Power Spectral Density.....	67
7.5.1	MIMO Antenna-1 Power Spectral Density Measurements.....	70
7.5.2	MIMO Antenna-2 Power Spectral Density Measurements.....	88
7.6	Radiated Emission Measurements	107
7.6.1	MIMO Radiated Spurious Emission Measurements (26 Tones)	113
7.6.2	MIMO Radiated Spurious Emission Measurements (242 Tones)	126
7.6.3	MIMO Radiated Band Edge Measurements (20MHz BW – Partial Tone – 106T)	139
7.6.4	MIMO Radiated Band Edge Measurements (20MHz BW – Full Tone – 242T)	142
7.6.5	MIMO Radiated Band Edge Measurements (40MHz BW – Full Tone – 484T)	145
7.6.6	MIMO Radiated Band Edge Measurements (80MHz BW – Full Tone – 996T)	148
7.6.7	MIMO Radiated Band Edge Measurements (160MHz BW – 996T).....	151
8.0	CONCLUSION.....	154

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 2 of 154

MEASUREMENT REPORT

UNII Band	Channel Bandwidth (MHz)	Tx Frequency (MHz)	MIMO	
			Max. Power (mW)	Max. Power (dBm)
1	20	5180 - 5240	75.683	18.79
2A		5260 - 5320	77.625	18.90
2C		5500 - 5720	72.946	18.63
3		5745 - 5825	69.984	18.45
4		5845 - 5885	78.886	18.97
1	40	5190 - 5230	73.961	18.69
2A		5270 - 5310	77.804	18.91
2C		5510 - 5710	73.621	18.67
3		5755 - 5795	72.611	18.61
4		5835 - 5875	81.658	19.12
1	80	5210	69.823	18.44
2A		5290	78.886	18.97
2C		5530 - 5690	77.268	18.88
3		5775	71.945	18.57
3/4		5855	76.913	18.86
1/2A	160	5250	73.114	18.64
2C		5290	73.621	18.67
3/4		5815	88.512	19.47

EUT Overview

Note: The UNII Band 4 max power values shown in the above table are e.i.r.p values.

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 3 of 154

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

These measurement tests were conducted at the Element laboratory located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 4 of 154

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMS711B**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

Test Device Serial No.: 1359M, 1274M, 0817M, 1270M, 1264M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR (FR1), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz and 6GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer

Band 1		Band 2A		Band 2C		Band 3		Band 3/4	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745	169	5845
:	:	:	:	:	:	:	:	:	:
40	5200	56	5280	120	5600	157	5785	173	5865
:	:	:	:	:	:	:	:	:	:
48	5240	64	5320	144	5720	165	5825	177	5885

Table 2-1. 802.11ax (20MHz) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3		Band 3/4	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755	167	5835
:	:	:	:	:	:	:	:	:	:
46	5230	62	5310	118	5590	159	5795	175	5875
				:	:				
				142	5710				

Table 2-2. 802.11ax (40MHz BW) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3		Band 3/4	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775	167	5835
				:	:				
				122	5610				
				:	:				
				138	5690				

Table 2-3. 802.11ax (80MHz BW) Frequency / Channel Operations

Band 1/2A		Band 2C		Band 3/4	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
50	5250	114	5570	163	5815

Table 2-4. 802.11ax (160MHz BW) Frequency / Channel Operations

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 5 of 154

Notes:

- 5GHz NII operation is possible in 20MHz, 40MHz, 80MHz, and 160MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Mode	Bandwidth	Tone	Duty Cycle
	[MHz]		
802.11ax NII RU	20	26T	99.3
		52T	99.3
		106T	99.3
		242T	99.3
802.11ax NII RU	40	26T	99.4
		52T	99.4
		106T	99.3
		242T	99.3
		484T	99.3
802.11ax NII RU	80	26T	99.4
		52T	99.4
		106T	99.3
		242T	99.3
		484T	99.3
		996T	99.3
802.11ax NII RU	160	26T	99.3
		52T	99.4
		106T	99.3
		242T	99.3
		484T	99.3
		996T	99.3

Table 2-5. Measured Duty Cycles

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 6 of 154



2. The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM		CDD	
		ANT1	ANT2	ANT1	ANT2	ANT1	ANT2
5GHz	11a	x	x	✓	✓	✓	✓
	11n	x	x	✓	✓	✓	✓
	11ac	x	x	✓	✓	✓	✓
	11ax	x	x	✓	✓	✓	✓

Table 2-6. Frequency / Channel Operations

✓ = Support; x = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

CDD = Cyclic Delay Diversity – 2Tx Function

3. The device supports the following data rates (shown in Mbps):

MCS Index	Spatial Stream	OFDMA (802.11ax)																							
		26T			52T			106T			242T			484T			996T			2x996T					
		0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI			
0	1	0.9	0.8	0.8	1.8	1.7	1.5	3.8	3.5	3.2	8.6	8.1	7.3	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3	144.1	136.1	122.5
1	1	1.8	1.7	1.5	3.5	3.3	3	7.5	7.1	6.4	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3	144.1	136.1	122.5	288.2	272.2	245
2	1	2.6	2.5	2.3	5.3	5	4.5	11.3	10.6	9.6	25.8	24.4	21.9	51.6	48.8	43.9	108.1	102.1	91.9	216.2	204.2	183.8	432.4	408.3	367.5
3	1	3.5	3.3	3	7.1	6.7	6	15	14.2	12.8	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5	288.2	272.2	245	576.5	544.4	490
4	1	5.3	5	4.5	10.6	10	9	22.5	21.3	19.1	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8	432.4	408.3	367.5	864.7	816.7	735
5	1	7.1	6.7	6	14.1	13.3	12	30	28.3	25.5	68.8	65	58.5	137.6	130	117	288.2	272.2	245	576.5	544.4	490	1152.9	1088.9	980
6	1	7.9	7.5	6.8	15.9	15	13.5	33.8	31.9	28.7	77.4	73.1	65.8	154.9	146.3	131.6	324.3	306.3	275.6	648.5	612.5	551.3	1297.1	1225	1102.5
7	1	8.8	8.3	7.5	17.6	16.7	15	37.5	35.4	31.9	86	81.3	73.1	172.1	162.5	146.3	360.3	340.3	306.3	720.6	680.6	612.5	1512.1	1425.1	1297.1
8	1	10.6	10	9	21.2	20	18	45	42.5	38.3	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5	864.7	816.7	735	1728.2	1633.3	1470
9	1	11.8	11.1	10	23.5	22.2	20	50	47.2	42.5	114.7	108.3	97.5	229.4	216.7	195	480.4	453.7	408.3	960.8	907.4	816.7	2048.3	1921.6	1735.5
10	1	13.2	12.5	11.3	26.5	25	22.5	56.3	53.1	47.8	129	121.9	109.7	258.1	243.8	219.4	540.4	510.4	459.4	1080.9	1020.8	918.8	2402	2268.5	2041.7
11	1	14.7	13.9	12.5	29.4	27.8	25	62.5	59	53.1	143.4	135.4	121.9	286.8	270.8	243.8	600.5	567.1	510.4	1201	1134.3	1020.8	2802	2665.5	2411.7
0	2	1.8	1.7	1.5	3.5	3.3	3	7.5	7.1	6.4	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3	144.1	136.1	122.5	288.2	272.2	245
1	2	3.5	3.3	3	7.1	6.7	6	15	14.2	12.8	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5	288.2	272.2	245	576.5	544.4	490
2	2	5.3	5	4.5	10.6	10	9	22.5	21.3	19.1	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8	432.4	408.3	367.5	864.7	816.7	735
3	2	7.1	6.7	6	14.1	13.3	12	30	28.3	25.5	68.8	65	58.5	137.6	130	117	288.2	272.2	245	576.5	544.4	490	1152.9	1088.9	980
4	2	10.6	10	9	21.2	20	18	45	42.5	38.3	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5	864.7	816.7	735	1728.2	1633.3	1470
5	2	14.1	13.3	12	28.2	26.7	24	60	56.7	51	137.6	130	117	275.3	260	234	576.5	544.4	490	1152.9	1088.9	980	2305.8	2177.8	1980
6	2	15.9	15	13.5	31.8	30	27	67.5	63.8	57.4	154.9	146.3	131.6	309.7	292.5	263.3	648.5	612.5	551.3	1297.1	1225	1102.5	2802	2665.5	2411.7
7	2	17.6	16.7	15	35.3	33.3	30	75	70.8	63.8	172.1	162.5	146.3	344.1	325	292.5	720.6	680.6	612.5	1441.2	1361.1	1225	3512.1	3333.3	3045
8	2	21.2	20	18	42.4	40	36	90	85	76.5	206.5	195	175.5	412.9	390	351	864.7	816.7	735	1728.2	1633.3	1470	4224.2	4033.3	3740
9	2	23.5	22.2	20	47.1	44.4	40	100	94.4	85	229.4	216.7	195	458.8	433.3	390	960.8	907.4	816.7	1921.6	1814.8	1633.3	4736.3	4533.3	4235
10	2	26.5	25	22.5	52.9	50	45	112.5	106.3	95.6	258.1	243.8	219.4	516.2	487.5	438.8	1080.9	1020.8	918.8	2161.8	2041.7	1837.5	5448.3	5211.7	4835
11	2	29.4	27.8	25	58.8	55.6	50	125	118.1	106.3	286.8	270.8	243.8	573.5	541.7	487.5	1201	1134.3	1020.8	2402	2268.5	2041.7	6054.3	5811.7	5435

Table 2-7. Supported Data Rates

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 7 of 154

2.3 Antenna Description

The following antenna gains were used for the testing.

Frequency [GHz]	Antenna 1 Gain (dBi)	Antenna 2 Gain (dBi)	Directional Gain (dBi)
5.20	-2.55	-4.51	-0.46
5.30	-2.29	-5.71	-0.82
5.50	-2.61	-3.22	0.10
5.80	-2.01	-3.55	0.26
5.85	-2.41	-2.48	0.57

Table 2-8. Antenna Peak Gain

2.4 Test Configuration

ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 7.6 for radiated emissions test setups, and 7.2, 7.3, 7.4, and 7.5 for antenna port conducted emissions test setups.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.5 Software and Firmware

The test was conducted with software/firmware version S711BXXU0_0627_0900_devFull installed on the EUT.

2.6 EMI Suppression Device(s) / Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 8 of 154

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

3.3 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 9 of 154

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 10 of 154

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 11 of 154

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AP2-001	EMC Cable and Switch System	1/11/2023	Annual	1/11/2024	AP2-001
-	AP2-002	EMC Cable and Switch System	1/11/2023	Annual	1/11/2024	AP2-002
-	ETS-001	EMC Cable and Switch System	1/11/2023	Annual	1/11/2024	ETS-001
-	ETS-002	EMC Cable and Switch System	1/11/2023	Annual	1/11/2024	ETS-002
-	WL25-1	Conducted Cable Set (25GHz)	1/12/2023	Annual	1/12/2024	WL25-1
-	WL40-1	Conducted Cable Set (40GHz)	1/12/2023	Annual	1/12/2024	WL40-1
Anritsu	MA24408A	Microwave Peak Power Sensor	6/1/2022	Annual	8/30/2023	11675
Anritsu	MA24408A	Microwave Peak Power Sensor	4/12/2022	Annual	8/30/2023	11676
EMCO	3115	Horn Antenna (1-18GHz)	8/8/2022	Biennial	8/8/2024	9704-5182
EMCO	3116	Horn Antenna (18-40GHz)	7/20/2021	Biennial	8/30/2023	9203-2178
Keysight Technologies	N9030A	PXA Signal Analyzer (3Hz-26.5GHz)	9/6/2022	Annual	9/6/2023	MY54490576
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	3/15/2023	Annual	3/15/2024	MY52350166
Keysight Technologies	N9038A	MXE EMI Receiver	1/21/2022	Annual	7/31/2023	MY51210133
Pasternack	NMLC-2	Line Conducted Emissions Cable (NM)	1/11/2023	Annual	1/11/2024	NMLC-2
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Test Antenna	9/28/2022	Biennial	9/28/2024	101058
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	8/29/2022	Annual	8/29/2023	100342
Rohde & Schwarz	ESW44	EMI Test Receiver (2Hz-44GHz)	3/1/2023	Annual	3/1/2024	101716
Rohde & Schwarz	VULB9162	Bi-Log Antenna	2/21/2023	Biennial	2/21/2025	00301
Solar Electronics	8012-50-R-24-BNC	Line Impedance Stabilization Network	9/21/2021	Biennial	9/21/2023	310233
Sunol	DRH-118	Horn Antenna (1-18GHz)	2/14/2022	Biennial	2/14/2024	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	8/30/2022	Biennial	8/30/2024	A051107
Sunol	JB6	JB6 Antenna	3/2/2023	Biennial	3/2/2025	A082816

Table 6-1. Annual Test Equipment Calibration Schedule

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 12 of 154

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMS711B
 FCC Classification: Unlicensed National Information Infrastructure (UNII)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
N/A	RSS-Gen [6.7]	26dB Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
15.407(e)	RSS-Gen [6.7]	6dB Bandwidth	>500kHz (5725-5850MHz and 5850 – 5895MHz)		PASS	Section 7.3
15.407 (a)(1)(iv), (a)(2), (a)(3)	RSS-247 [6.2]	Maximum Conducted Output Power	Maximum conducted powers must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.4
15.407 (a)(1)(iv), (a)(2), (a)(3)	RSS-247 [6.2]	Maximum Power Spectral Density	Maximum power spectral density must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.5
15.407(h)	RSS-247 [6.3]	Dynamic Frequency Selection	See DFS Test Report		PASS	See DFS Test Report
15.407(b)(1), (b)(2), (b)(3), (b)(4)	RSS-247 [6.2]	Undesirable Emissions	Undesirable emissions must meet the limits detailed in 15.407(b) (RSS-247 [6.2])	RADIATED	PASS	Section 7.6
15.205, 15.407(b)(1), (b)(4), (b)(5), (b)(6)	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])		PASS	Section 7.6, 7.7

Table 7-1. Summary of Test Results

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “UNII Automation,” Version 4.7.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Chamber Automation,” Version 1.5.0.
- 6) 802.11ax OFDMA testing was performed for all signal tone configurations as specified by the 802.11ax standard. Worst case results are determined and reported per the guidance provided at the October 2018 TCB Workshop.
- 7) Only one RU index could be selected at a time, so no contiguous or non-contiguous RUs were considered for testing.

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 13 of 154

7.2 26dB Bandwidth Measurement

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

Test Procedure Used

ANSI C63.10-2013 – Section 12.4

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 26. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

The 26dB Bandwidth measurement for each channel was measured with the RU index showing the highest conducted power.

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 14 of 154

MIMO 26dB Bandwidth Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	ax (20MHz)	26T	MCS0	19.04
	5200	40	ax (20MHz)	26T	MCS0	20.49
	5240	48	ax (20MHz)	26T	MCS0	20.41
	5190	38	ax (40MHz)	26T	MCS0	40.76
	5230	46	ax (40MHz)	26T	MCS0	40.35
	5210	42	ax (80MHz)	26T	MCS0	78.43
Band 1/2A	5250	50	ax (160MHz)	26T	MCS0	164.20
Band 2A	5260	52	ax (20MHz)	26T	MCS0	20.59
	5280	56	ax (20MHz)	26T	MCS0	20.53
	5320	64	ax (20MHz)	26T	MCS0	20.31
	5270	54	ax (40MHz)	26T	MCS0	40.58
	5310	62	ax (40MHz)	26T	MCS0	40.27
	5290	58	ax (80MHz)	26T	MCS0	81.78
Band 2C	5500	100	ax (20MHz)	26T	MCS0	20.55
	5600	120	ax (20MHz)	26T	MCS0	19.03
	5720	144	ax (20MHz)	26T	MCS0	20.50
	5510	102	ax (40MHz)	26T	MCS0	40.55
	5590	118	ax (40MHz)	26T	MCS0	38.19
	5710	142	ax (40MHz)	26T	MCS0	40.76
	5530	106	ax (80MHz)	26T	MCS0	80.92
	5610	122	ax (80MHz)	26T	MCS0	82.00
	5690	138	ax (80MHz)	26T	MCS0	81.17
	5570	114	ax (160MHz)	26T	MCS0	162.70

Table 7-2. Bands 1, 2A, 2C Conducted 26dB Bandwidth Measurements MIMO ANT1 (26 Tones)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 15 of 154

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	ax (20MHz)	26T	MCS0	18.47
	5200	40	ax (20MHz)	26T	MCS0	20.07
	5240	48	ax (20MHz)	26T	MCS0	20.26
	5190	38	ax (40MHz)	26T	MCS0	39.97
	5230	46	ax (40MHz)	26T	MCS0	40.39
	5210	42	ax (80MHz)	26T	MCS0	78.18
band 1/2A	5250	50	ax (160MHz)	26T	MCS0	162.50
Band 2A	5260	52	ax (20MHz)	26T	MCS0	20.21
	5280	56	ax (20MHz)	26T	MCS0	20.11
	5320	64	ax (20MHz)	26T	MCS0	19.99
	5270	54	ax (40MHz)	26T	MCS0	39.68
	5310	62	ax (40MHz)	26T	MCS0	40.09
	5290	58	ax (80MHz)	26T	MCS0	80.95
Band 2C	5500	100	ax (20MHz)	26T	MCS0	20.16
	5600	120	ax (20MHz)	26T	MCS0	18.39
	5720	144	ax (20MHz)	26T	MCS0	20.00
	5510	102	ax (40MHz)	26T	MCS0	39.93
	5590	118	ax (40MHz)	26T	MCS0	38.12
	5710	142	ax (40MHz)	26T	MCS0	39.81
	5530	106	ax (80MHz)	26T	MCS0	81.07
	5610	122	ax (80MHz)	26T	MCS0	80.88
	5690	138	ax (80MHz)	26T	MCS0	81.46
	5570	114	ax (160MHz)	26T	MCS0	161.50

Table 7-3. Bands 1, 2A, 2C Conducted 26dB Bandwidth Measurements MIMO ANT2 (26 Tones)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 16 of 154

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	ax (20MHz)	242T	MCS0	22.85
	5200	40	ax (20MHz)	242T	MCS0	22.40
	5240	48	ax (20MHz)	242T	MCS0	22.45
	5190	38	ax (40MHz)	484T	MCS0	43.62
	5230	46	ax (40MHz)	484T	MCS0	44.28
	5210	42	ax (80MHz)	996T	MCS0	87.40
and 1/2A	5250	50	ax (160MHz)	996T	MCS0	165.10
Band 2A	5260	52	ax (20MHz)	242T	MCS0	22.29
	5280	56	ax (20MHz)	242T	MCS0	22.51
	5320	64	ax (20MHz)	242T	MCS0	22.76
	5270	54	ax (40MHz)	484T	MCS0	44.07
	5310	62	ax (40MHz)	484T	MCS0	44.23
	5290	58	ax (80MHz)	996T	MCS0	86.74
Band 2C	5500	100	ax (20MHz)	242T	MCS0	23.13
	5600	120	ax (20MHz)	242T	MCS0	22.44
	5720	144	ax (20MHz)	242T	MCS0	22.52
	5510	102	ax (40MHz)	484T	MCS0	43.63
	5590	118	ax (40MHz)	484T	MCS0	44.39
	5710	142	ax (40MHz)	484T	MCS0	43.62
	5530	106	ax (80MHz)	996T	MCS0	89.50
	5610	122	ax (80MHz)	996T	MCS0	87.97
	5690	138	ax (80MHz)	996T	MCS0	91.04
	5570	114	ax (160MHz)	996T	MCS0	163.70

Table 7-4. Bands 1, 2A, 2C Conducted 26dB Bandwidth Measurements MIMO ANT1 (Full Tones)


FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 17 of 154

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	ax (20MHz)	242T	MCS0	22.45
	5200	40	ax (20MHz)	242T	MCS0	21.88
	5240	48	ax (20MHz)	242T	MCS0	22.69
	5190	38	ax (40MHz)	484T	MCS0	44.25
	5230	46	ax (40MHz)	484T	MCS0	44.49
	5210	42	ax (80MHz)	996T	MCS0	85.89
	5250	50	ax (160MHz)	996T	MCS0	166.90
Band 2A	5260	52	ax (20MHz)	242T	MCS0	22.65
	5280	56	ax (20MHz)	242T	MCS0	23.77
	5320	64	ax (20MHz)	242T	MCS0	22.97
	5270	54	ax (40MHz)	484T	MCS0	44.23
	5310	62	ax (40MHz)	484T	MCS0	44.45
	5290	58	ax (80MHz)	996T	MCS0	87.81
Band 2C	5500	100	ax (20MHz)	242T	MCS0	22.18
	5600	120	ax (20MHz)	242T	MCS0	22.11
	5720	144	ax (20MHz)	242T	MCS0	24.36
	5510	102	ax (40MHz)	484T	MCS0	44.29
	5590	118	ax (40MHz)	484T	MCS0	45.54
	5710	142	ax (40MHz)	484T	MCS0	43.22
	5530	106	ax (80MHz)	996T	MCS0	84.06
	5610	122	ax (80MHz)	996T	MCS0	88.82
	5690	138	ax (80MHz)	996T	MCS0	90.62
	5570	114	ax (160MHz)	996T	MCS0	158.80


Table 7-5. Bands 1, 2A, 2C Conducted 26dB Bandwidth Measurements MIMO ANT2 (Full Tones)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 18 of 154

7.2.1 MIMO Antenna-1 26dB Bandwidth Measurements

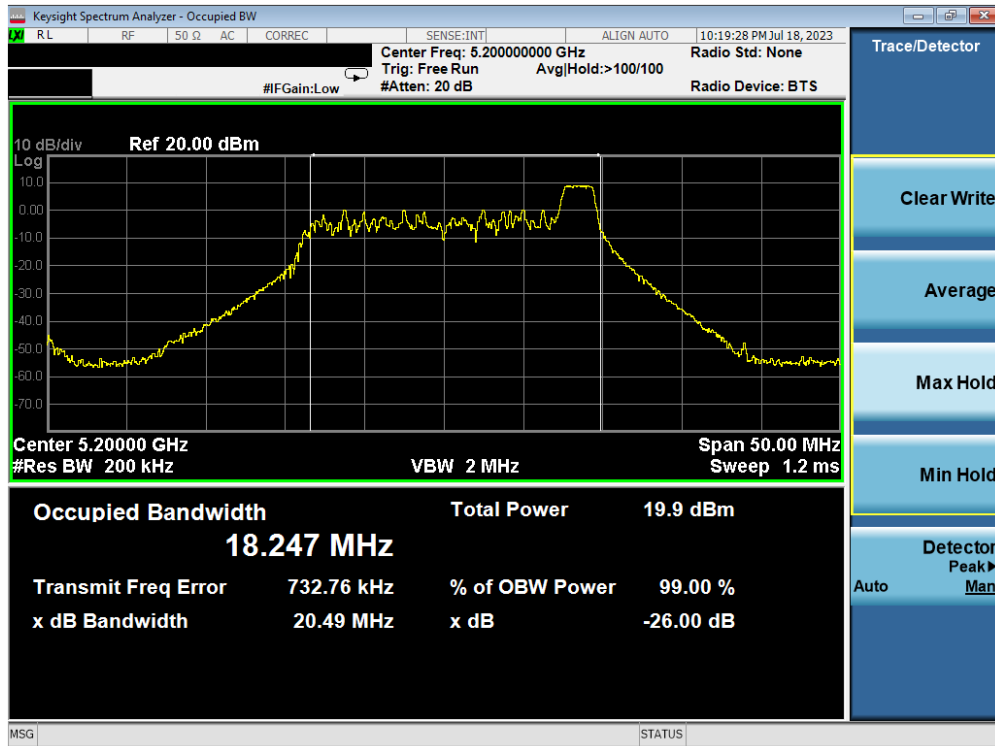


Plot 7-1. 26dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 40)

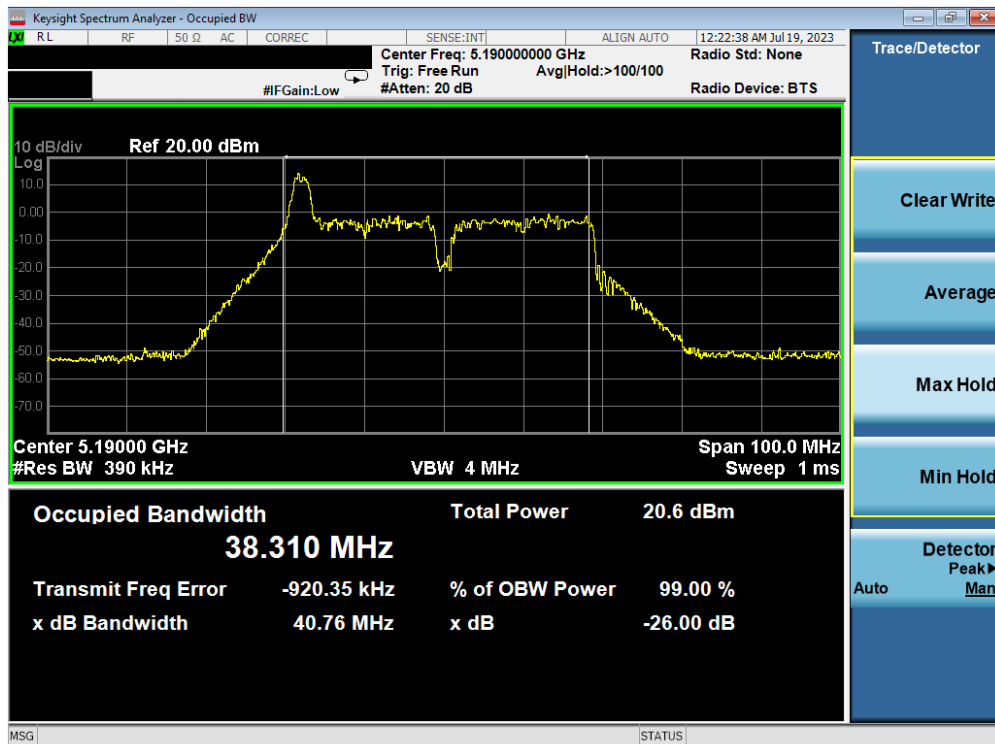


Plot 7-2. 26dB Bandwidth Plot MIMO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 38)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 19 of 154

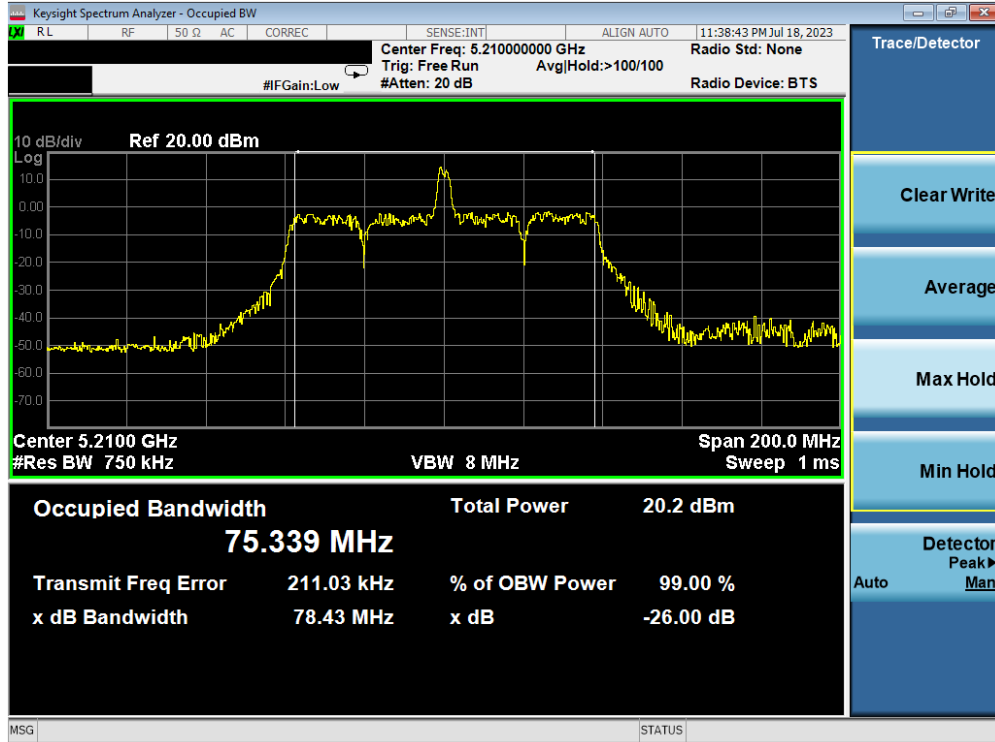


Plot 7-3. 26dB Bandwidth Plot MIMO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 42)

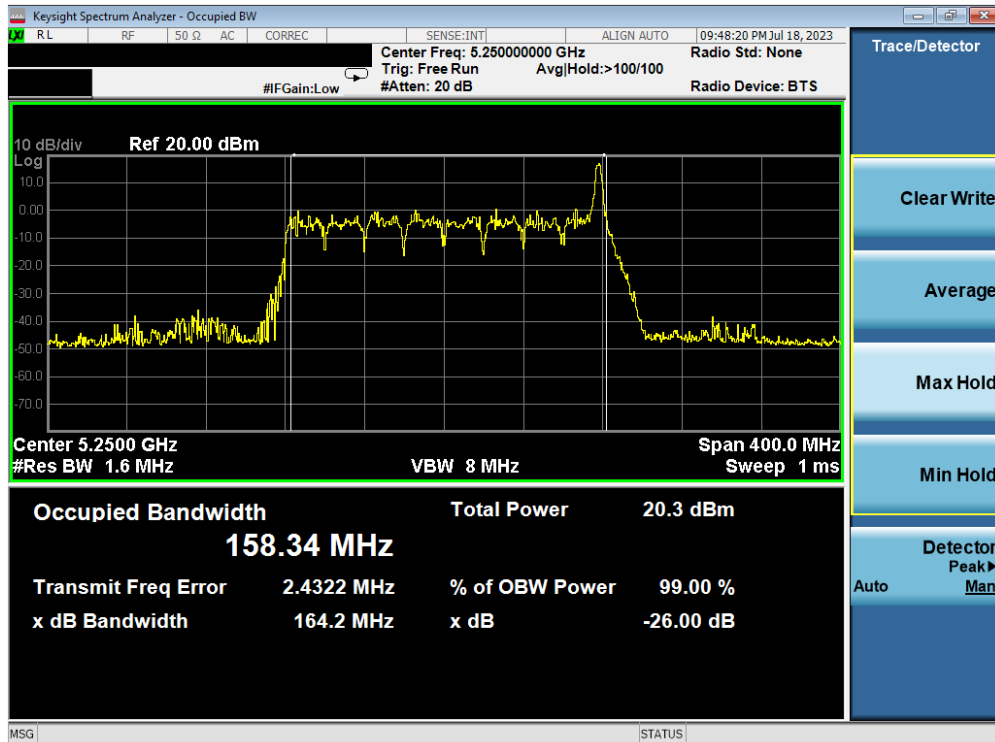


Plot 7-4. 26dB Bandwidth Plot MIMO ANT1 (160MHz BW 802.11ax – 26 Tones (UNII Band 1/2A) – Ch. 50)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 20 of 154

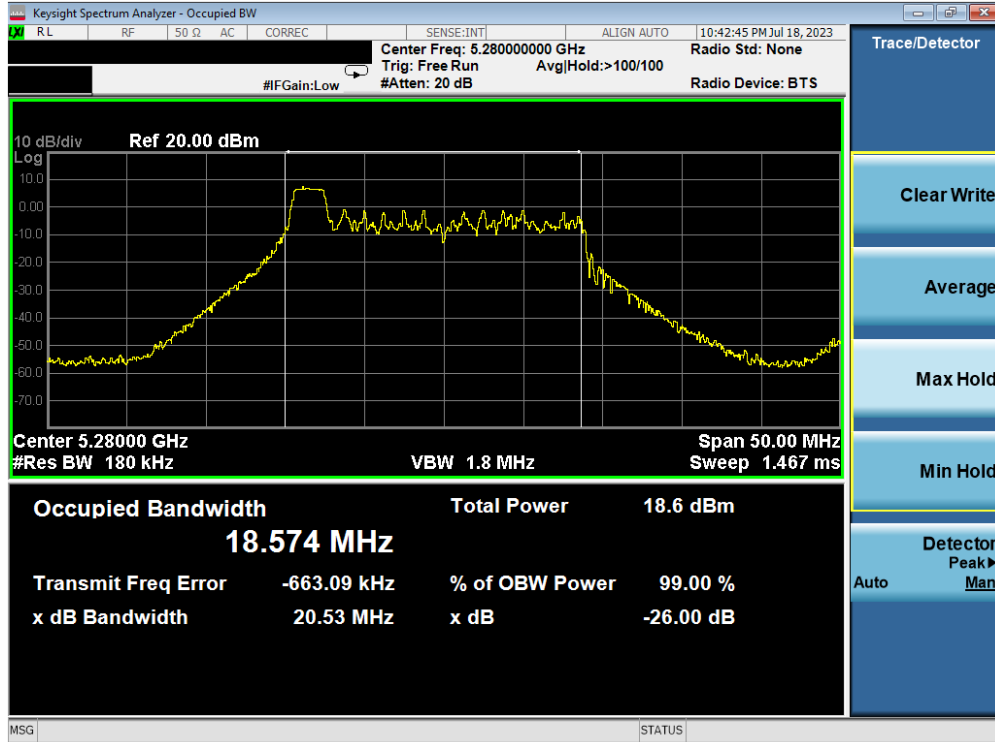


Plot 7-5. 26dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 56)

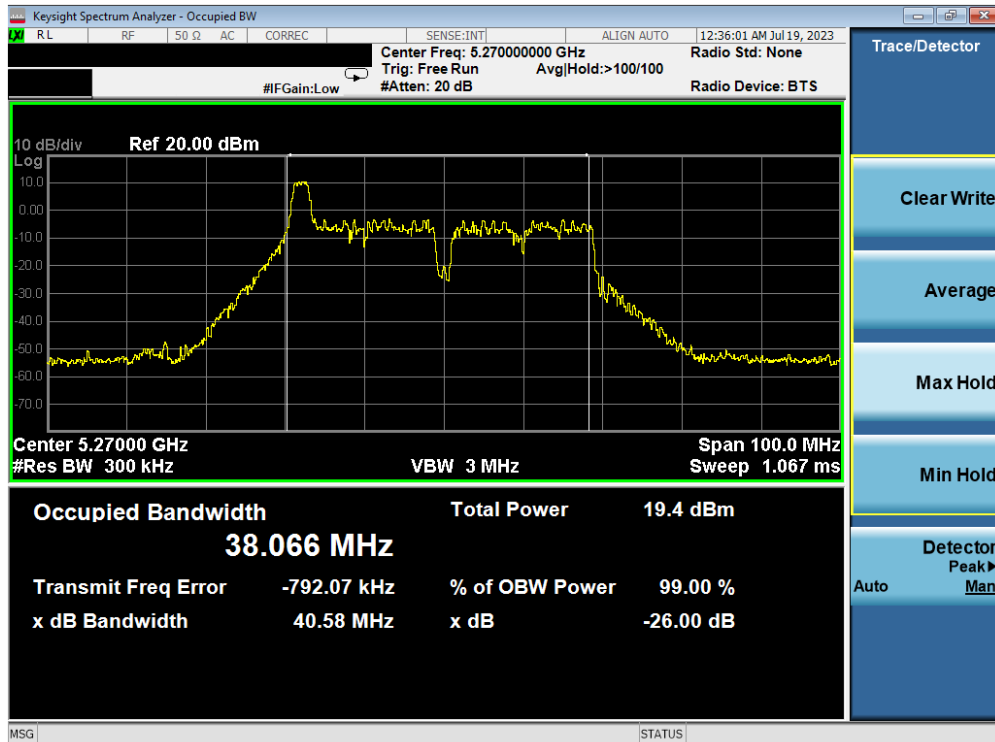


Plot 7-6. 26dB Bandwidth Plot MIMO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 21 of 154

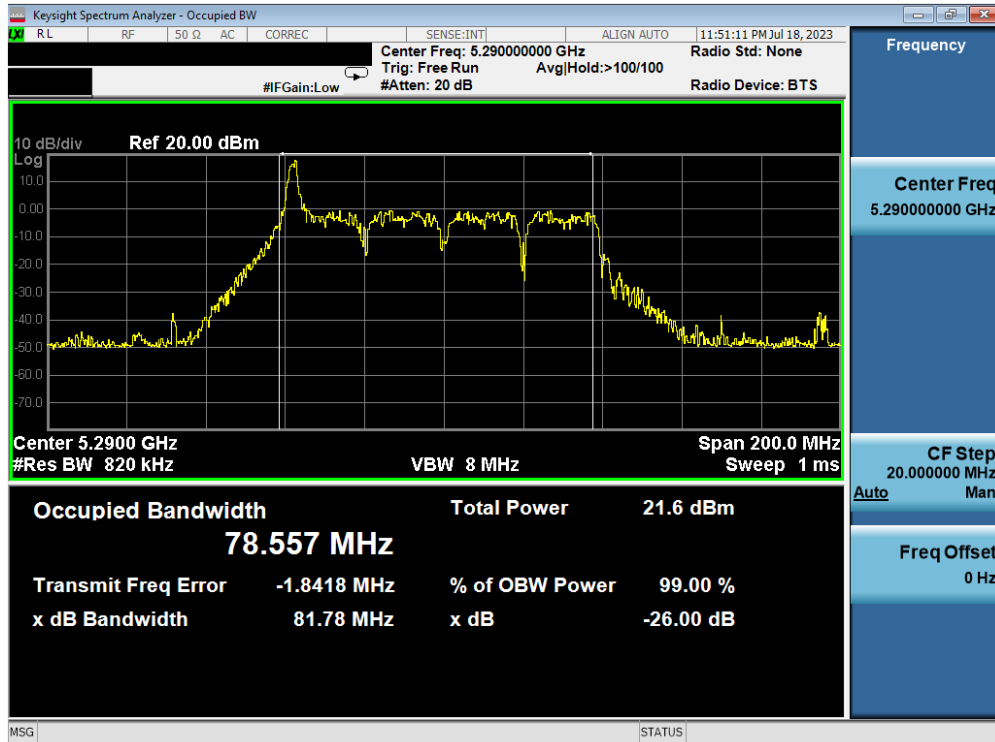


Plot 7-7. 26dB Bandwidth Plot MIMO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 58)

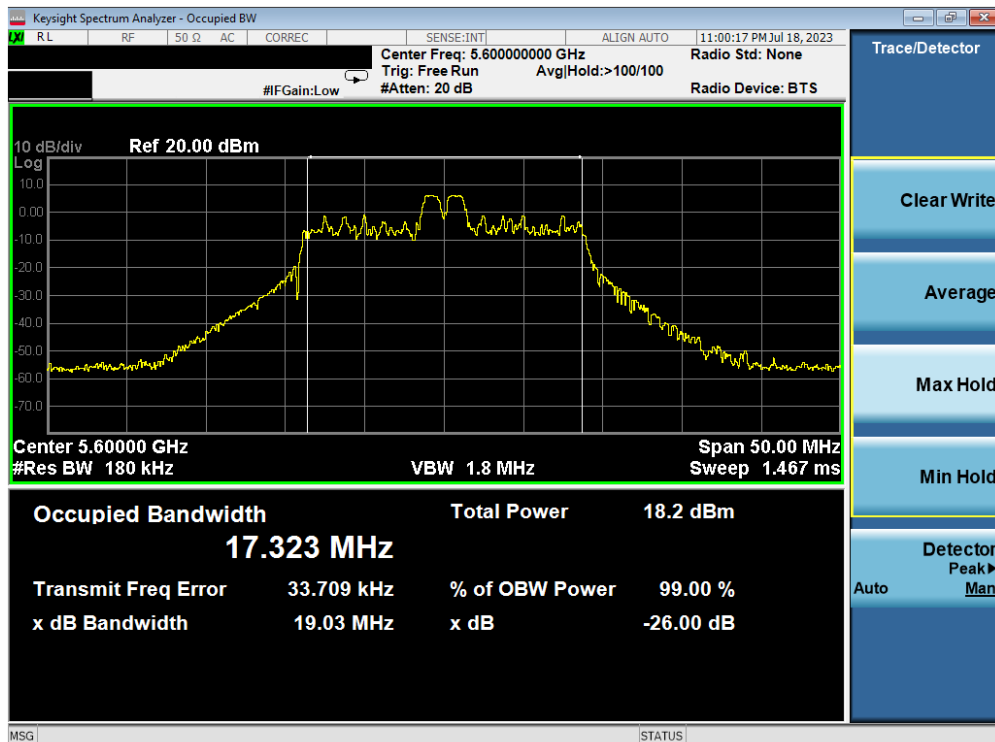


Plot 7-8. 26dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 22 of 154

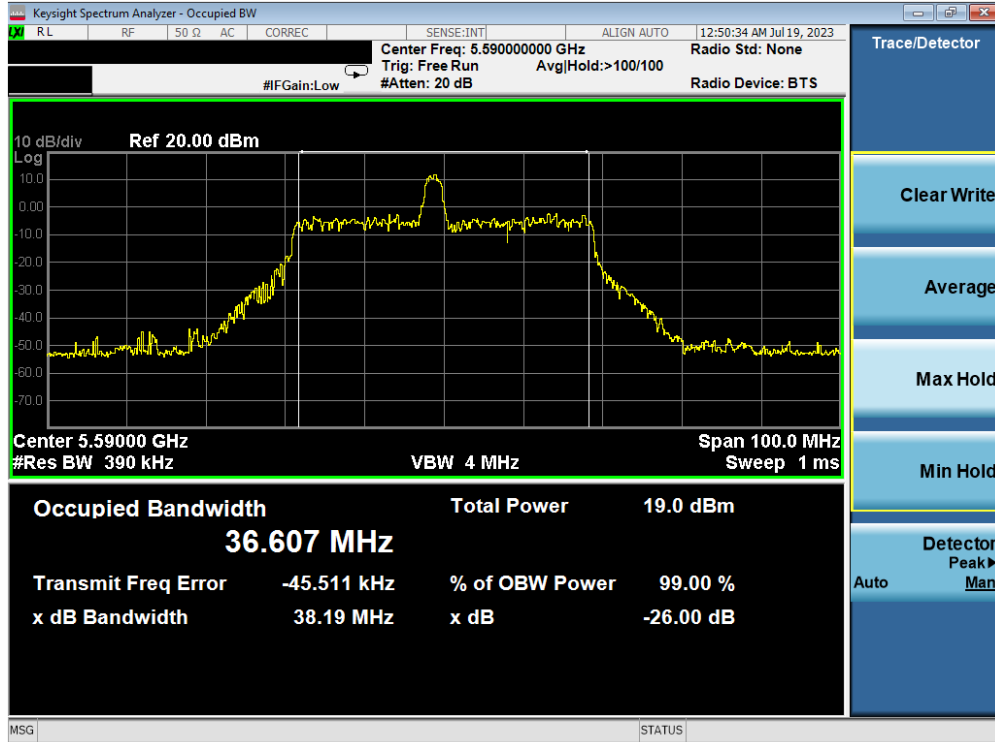


Plot 7-9. 26dB Bandwidth Plot MIMO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 118)

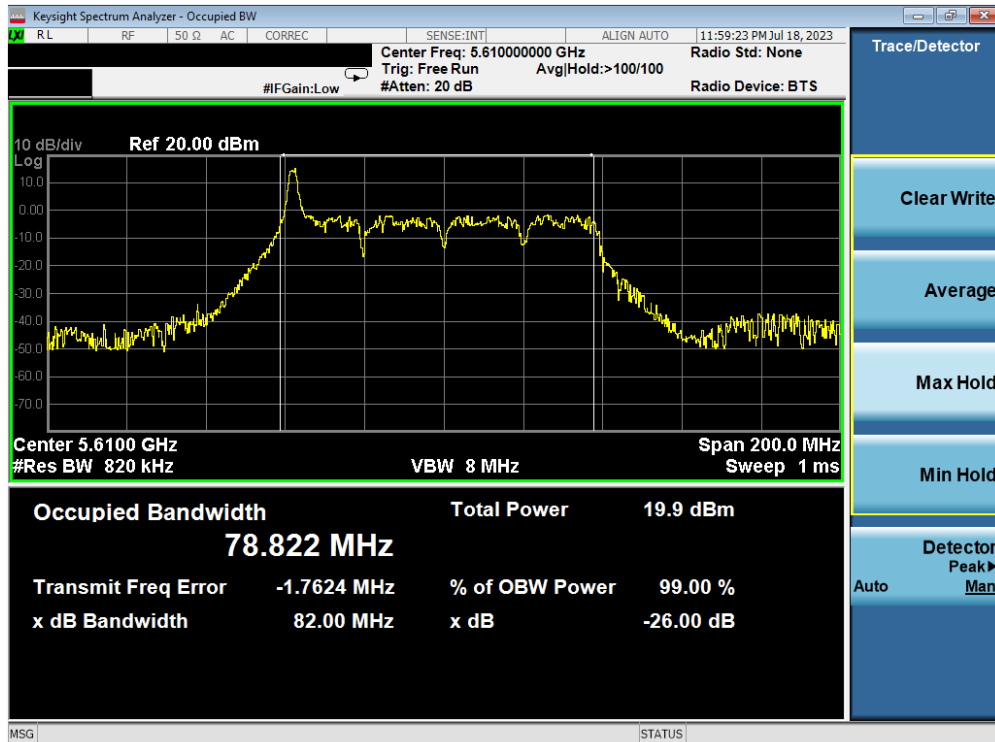


Plot 7-10. 26dB Bandwidth Plot MIMO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 23 of 154

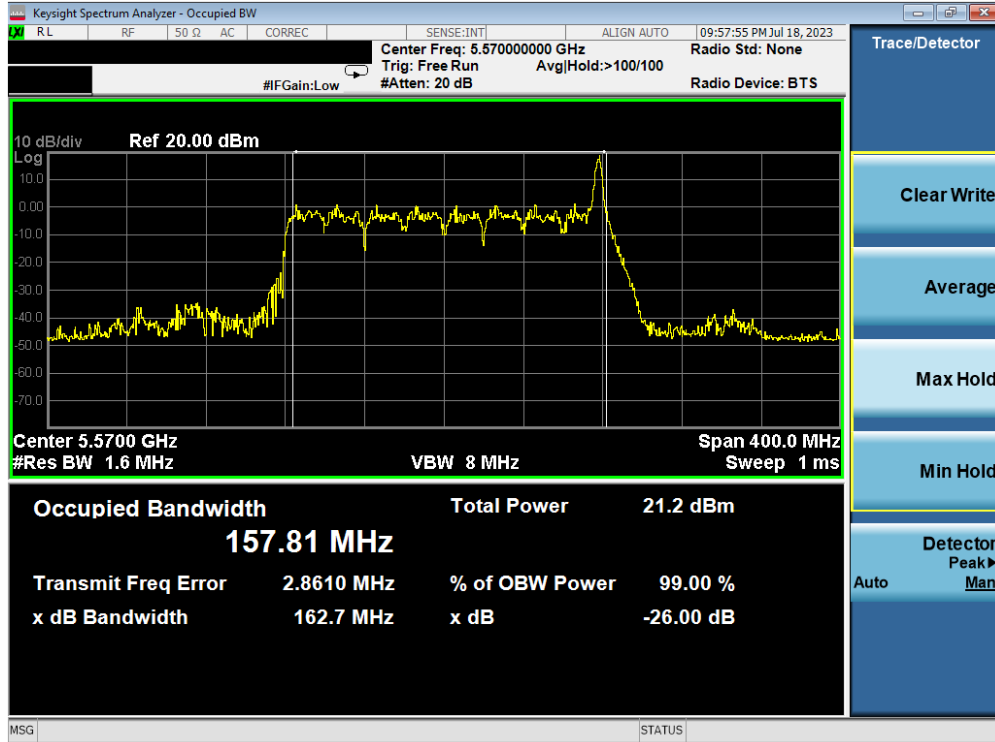


Plot 7-11. 26dB Bandwidth Plot MIMO ANT1 (160MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 114)

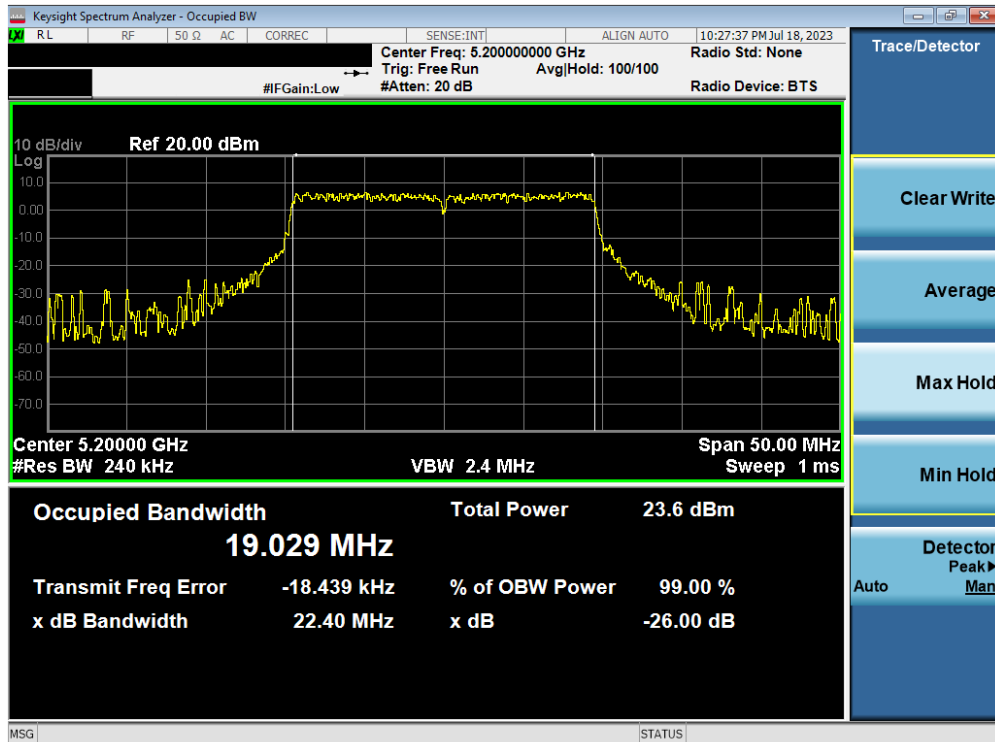


Plot 7-12. 26dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 1) – Ch. 40)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 24 of 154

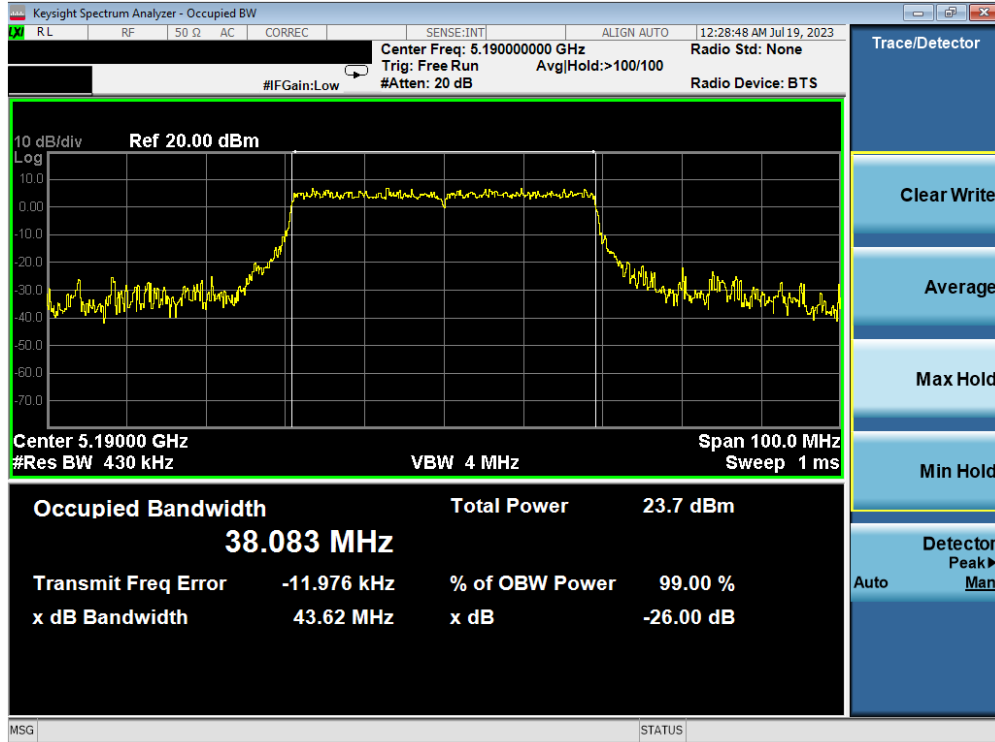


Plot 7-13. 26dB Bandwidth Plot MIMO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 1) – Ch. 38)

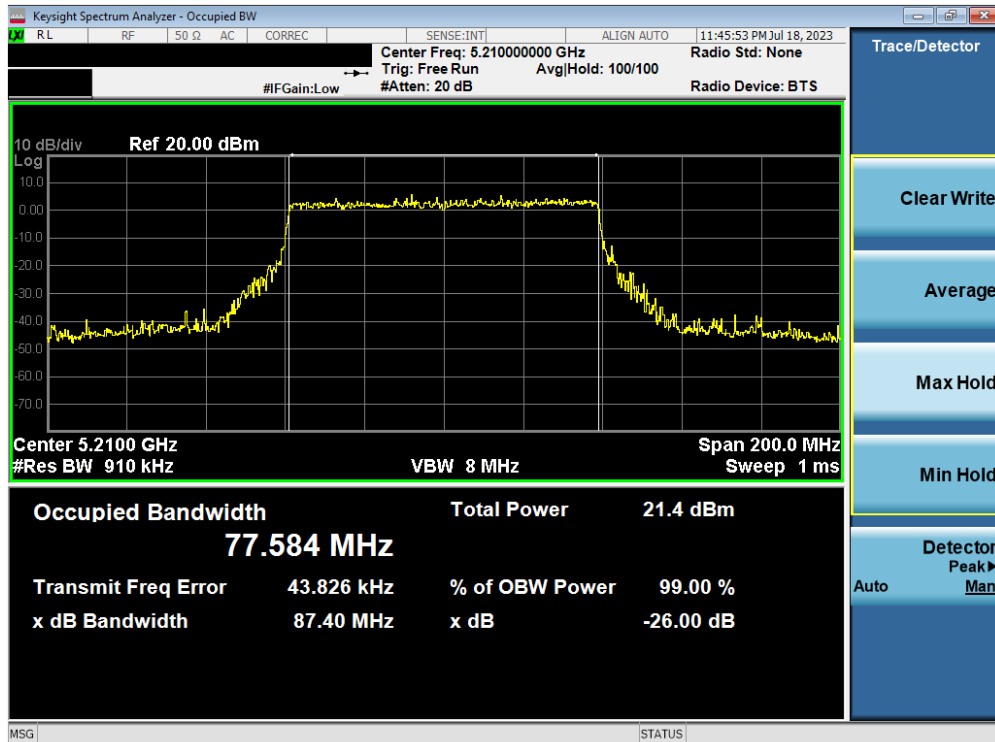


Plot 7-14. 26dB Bandwidth Plot MIMO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 1) – Ch. 42)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 25 of 154

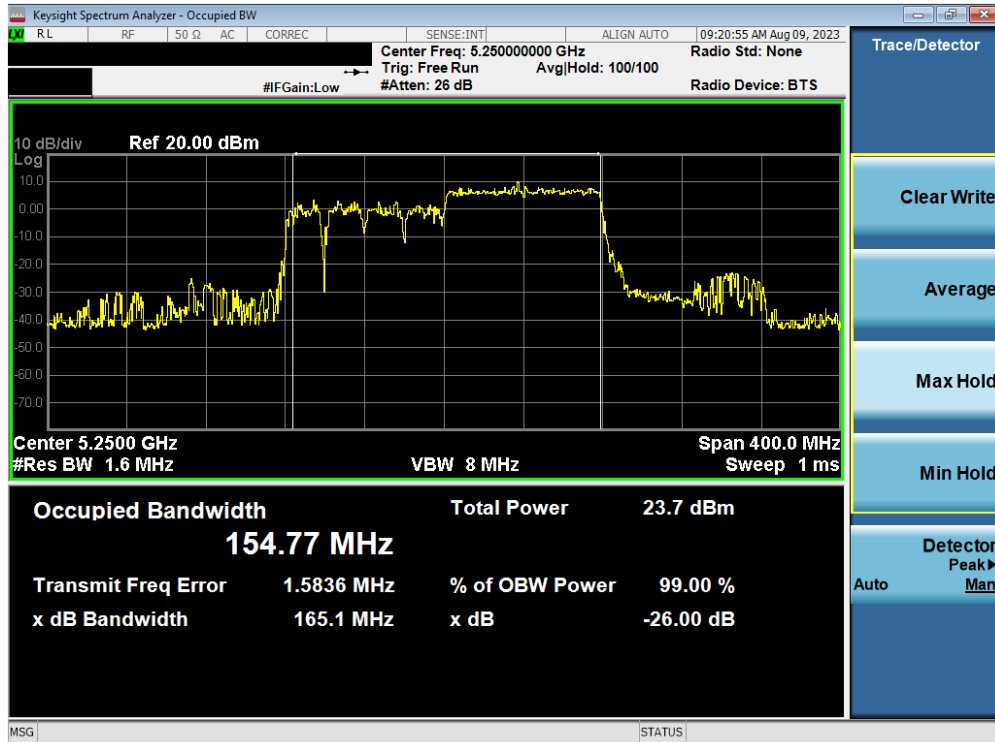


Plot 7-15. 26dB Bandwidth Plot MIMO ANT1 (160MHz BW 802.11ax – 996 Tones (UNII Band 1/2A) – Ch. 50)

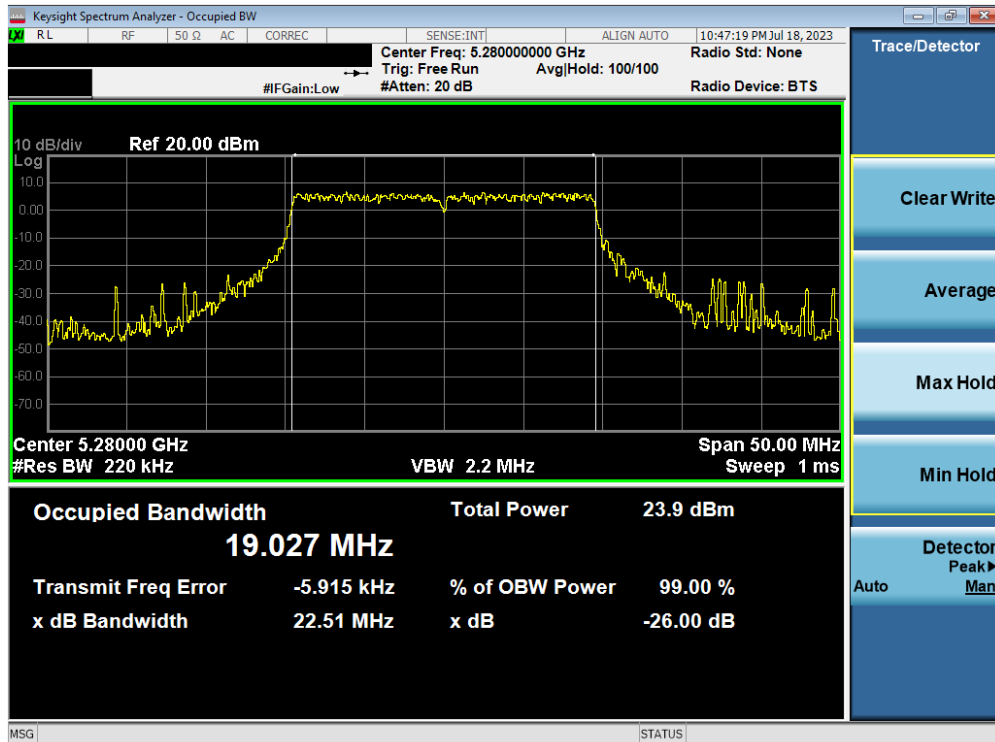


Plot 7-16. 26dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 26 of 154

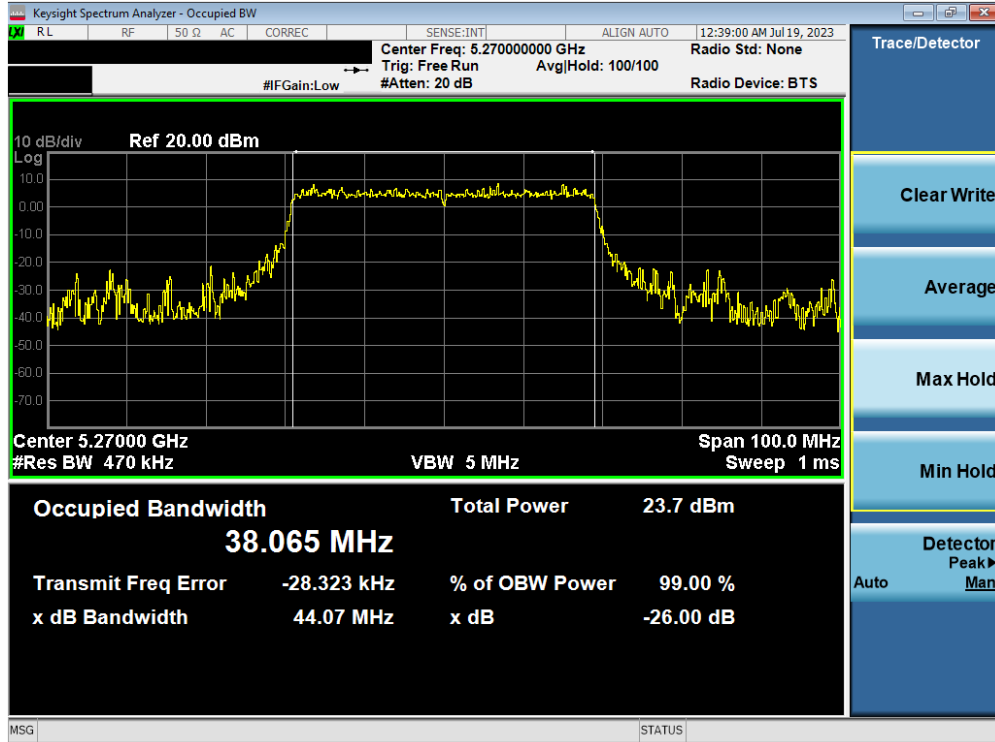


Plot 7-17. 26dB Bandwidth Plot MIMO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 2A) – Ch. 54)

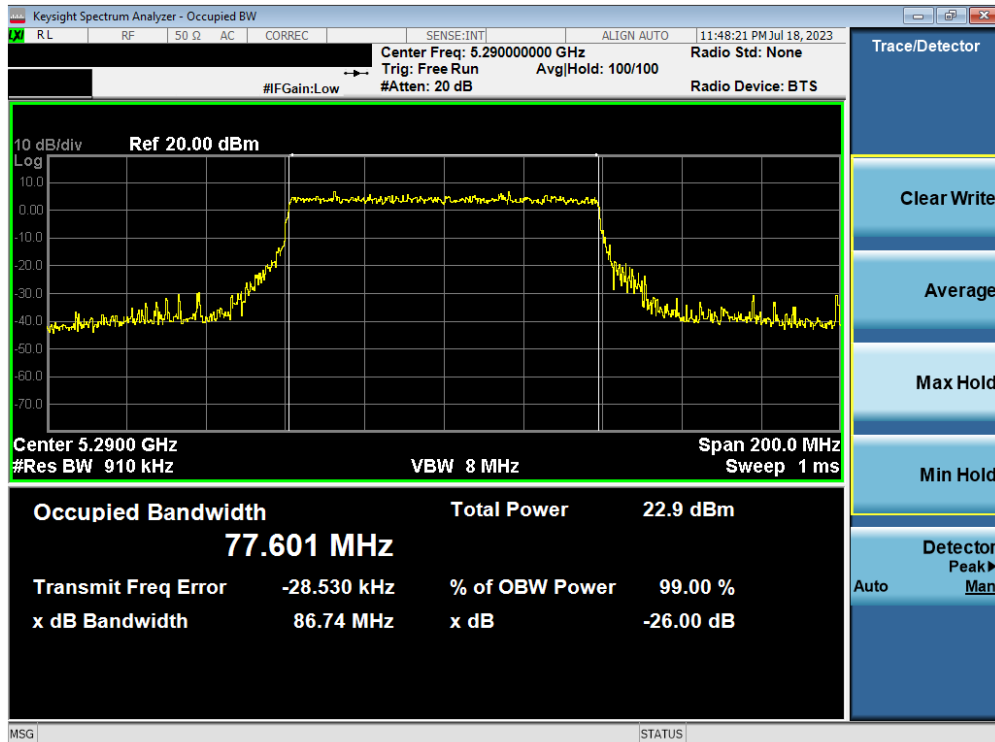


Plot 7-18. 26dB Bandwidth Plot MIMO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 27 of 154

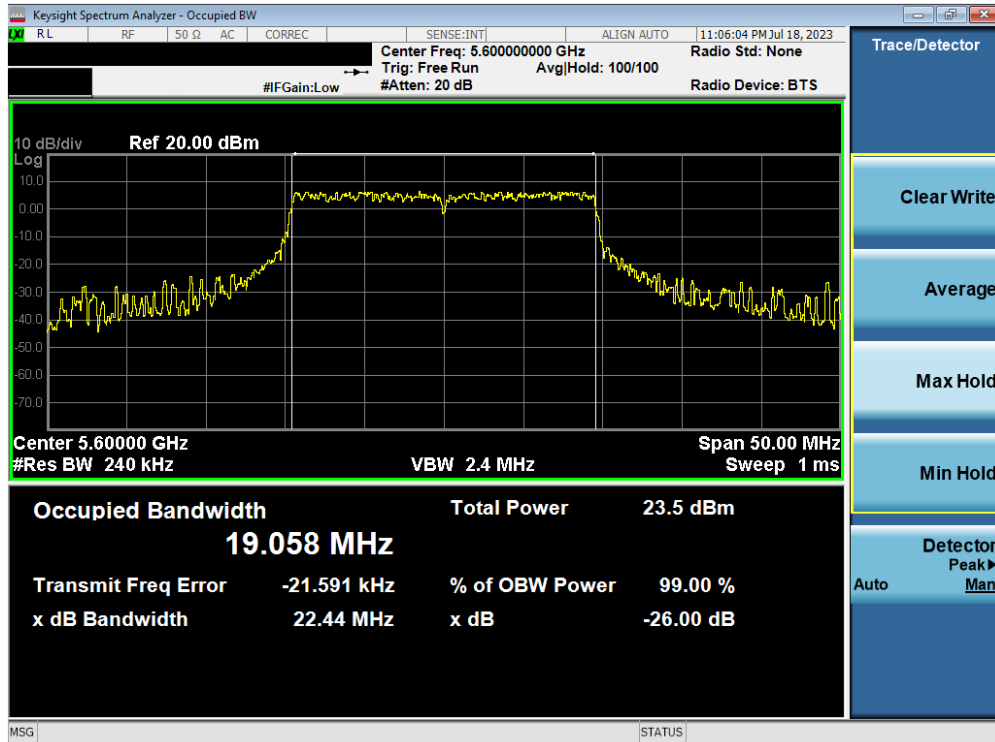


Plot 7-19. 26dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 2C) – Ch. 120)

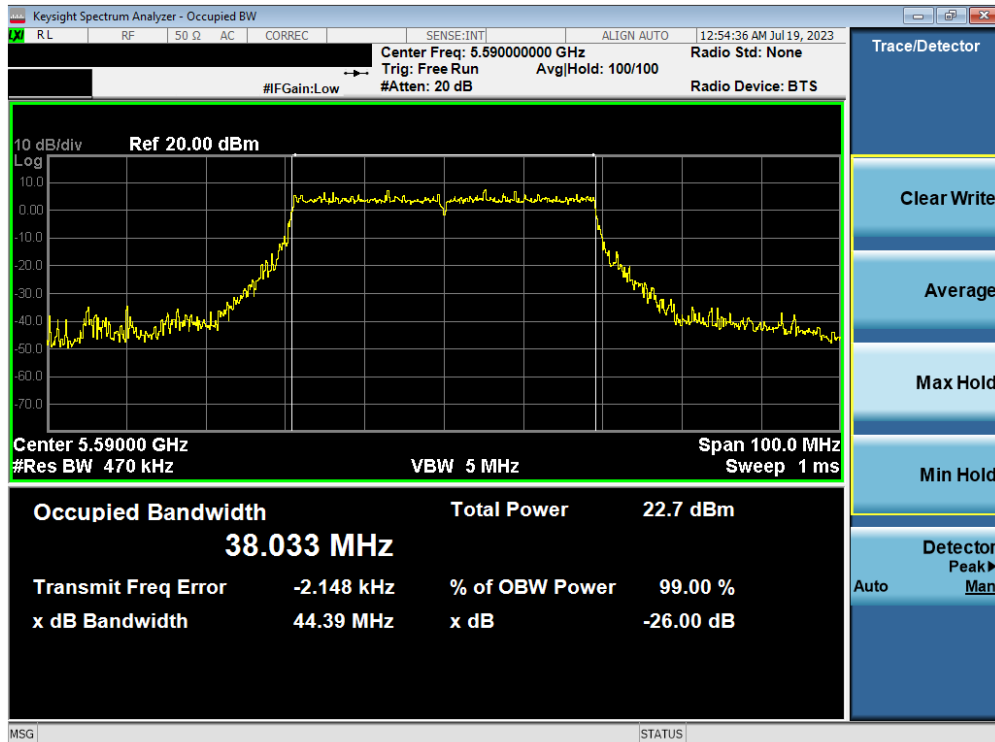


Plot 7-20. 26dB Bandwidth Plot MIMO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 2C) – Ch. 118)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 28 of 154

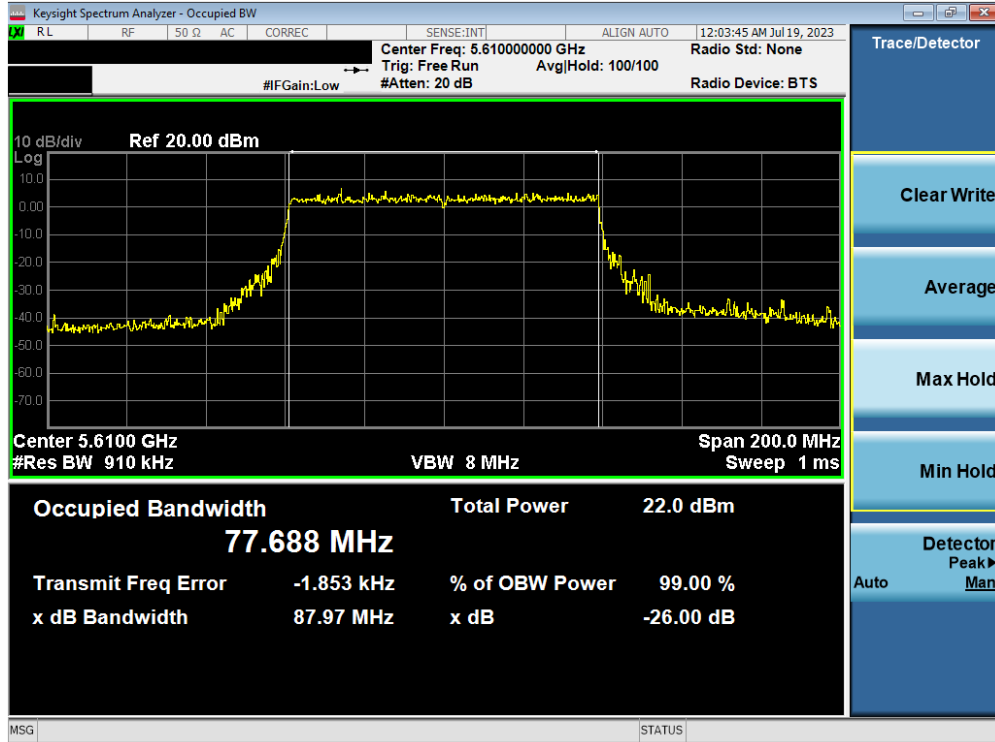


Plot 7-21. 26dB Bandwidth Plot MIMO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 2C) – Ch. 122)

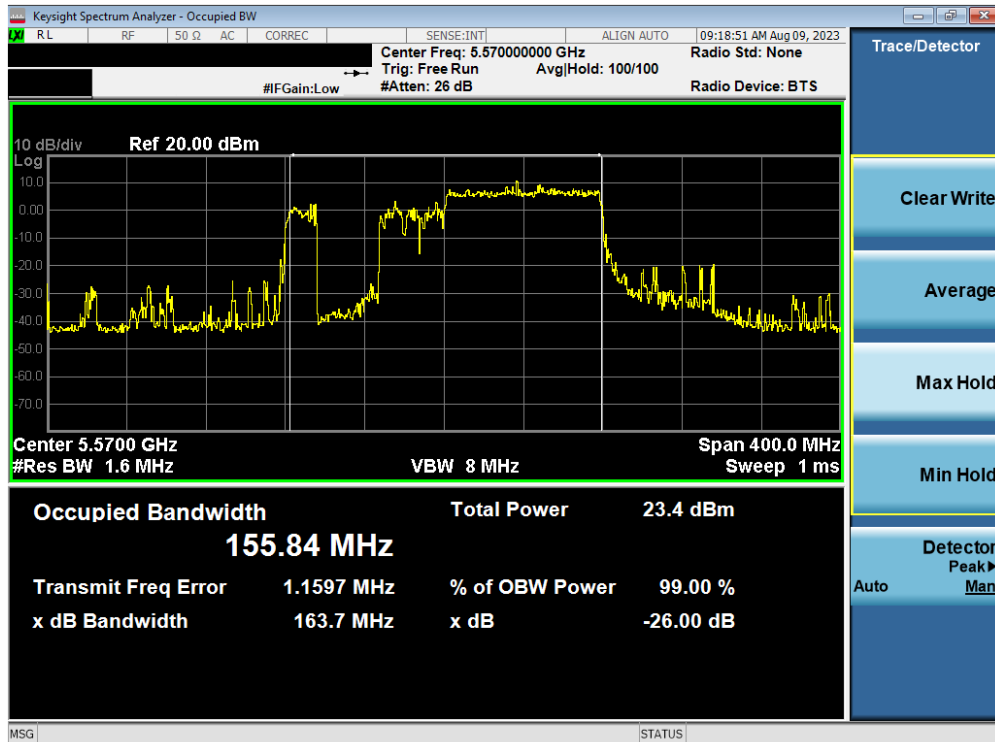


Plot 7-22. 26dB Bandwidth Plot MIMO ANT1 (160MHz BW 802.11ax – 996 Tones (UNII Band 2C) – Ch. 114)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 29 of 154

7.2.2 MIMO Antenna-2 26dB Bandwidth Measurements

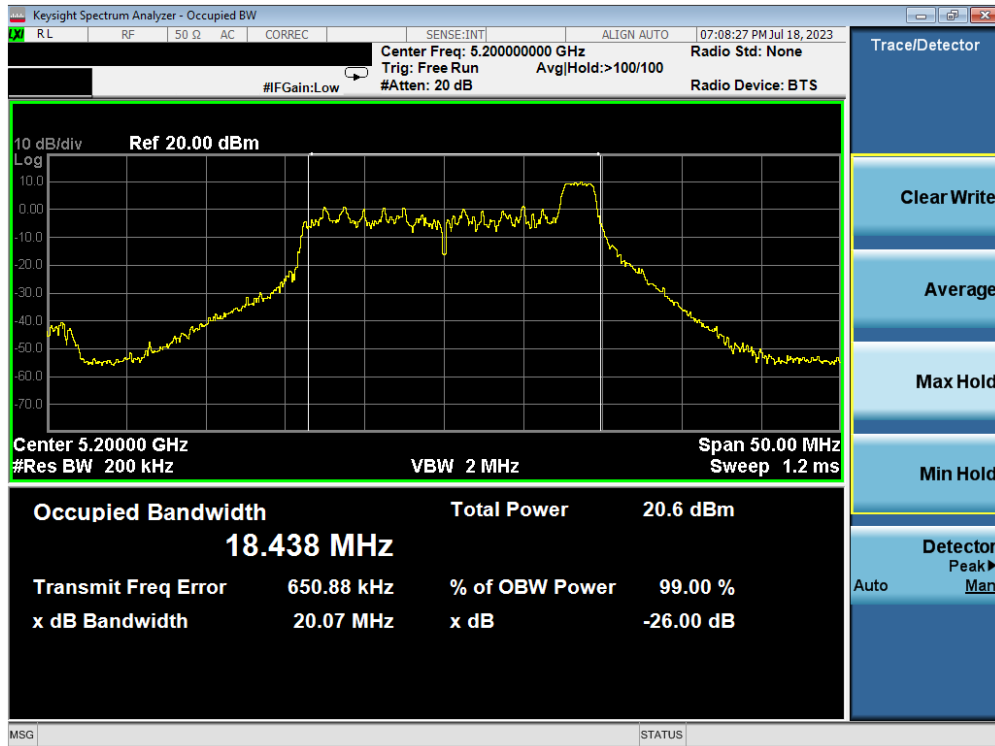


Plot 7-23. 26dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 40)

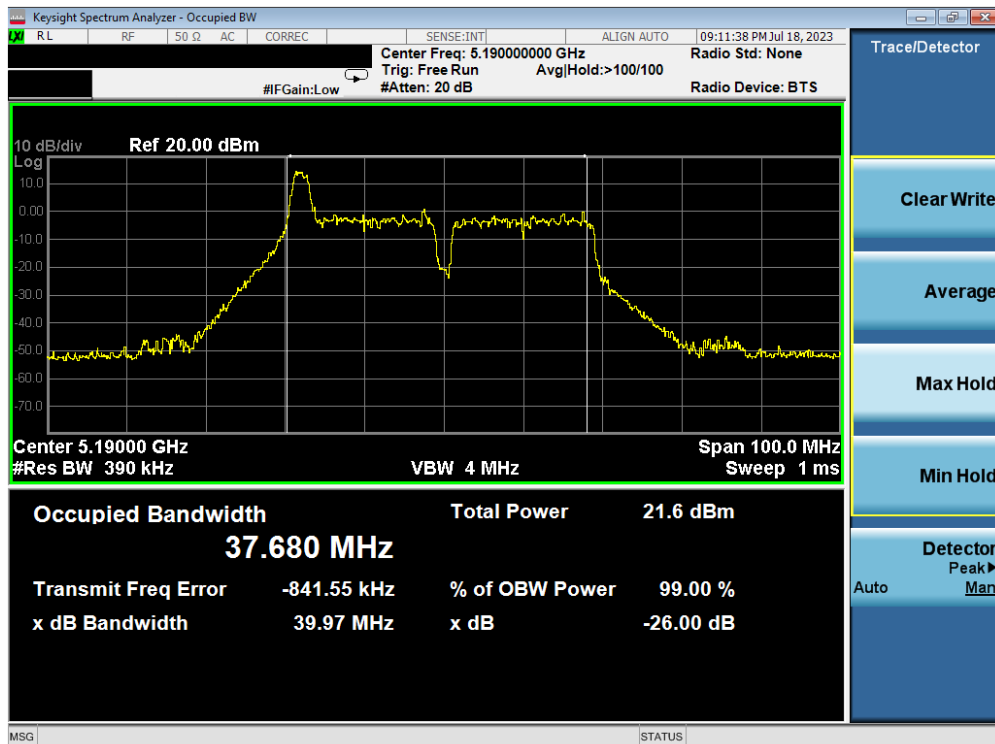


Plot 7-24. 26dB Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 38)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 30 of 154

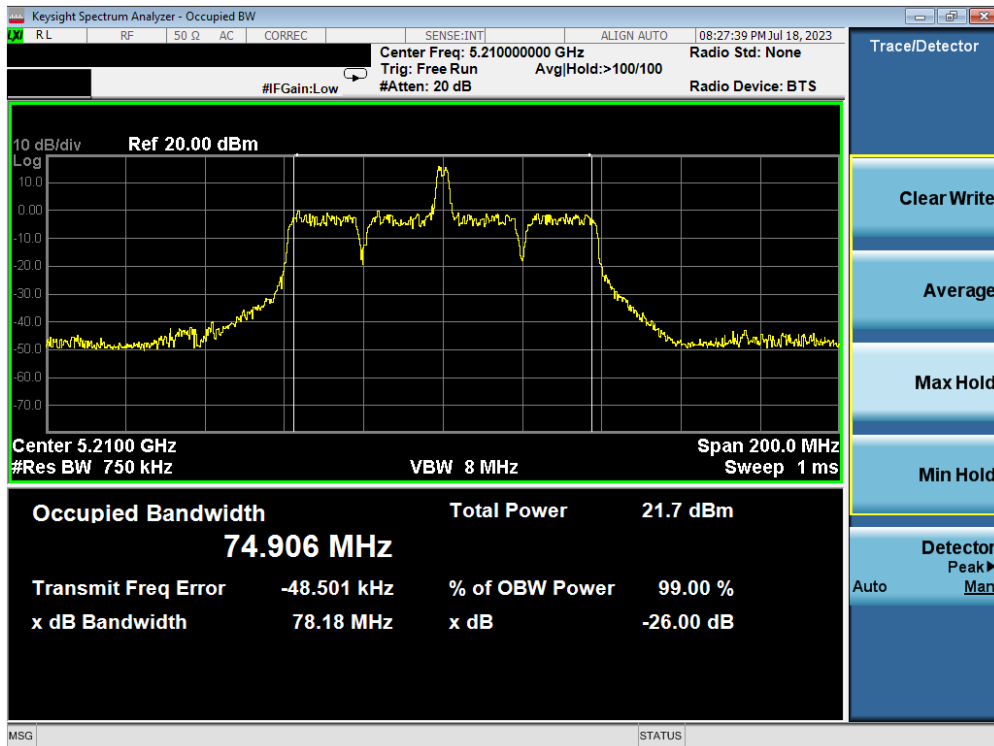


Plot 7-25. 26dB Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 42)

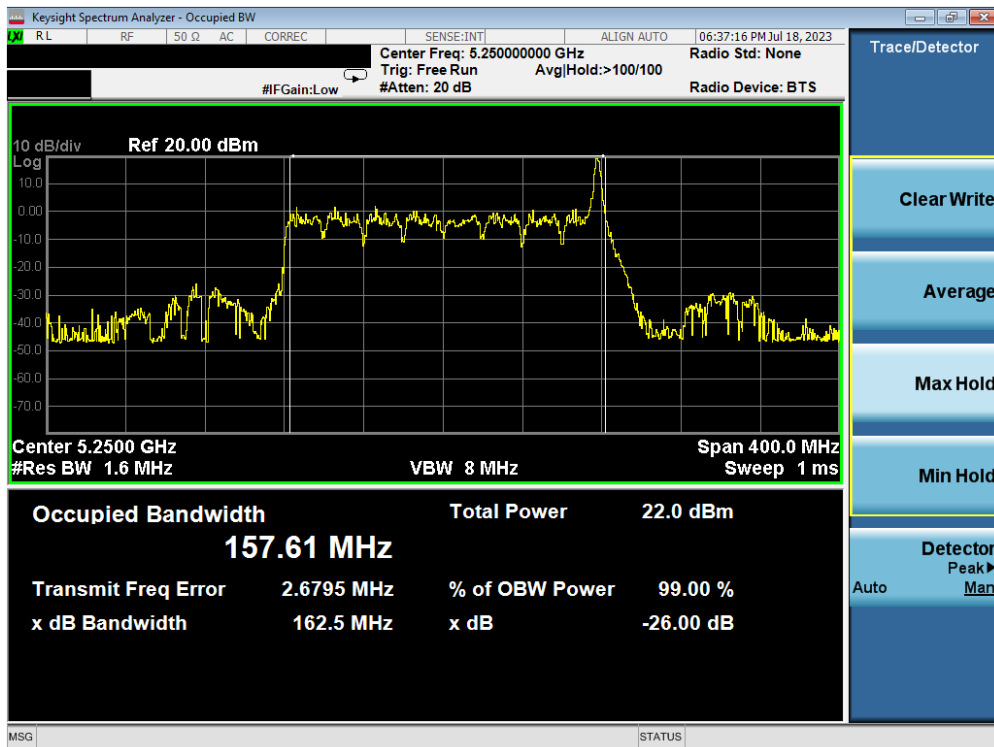


Plot 7-26. 26dB Bandwidth Plot MIMO ANT2 (160MHz BW 802.11ax – 26 Tones (UNII Band 1/2A) – Ch. 50)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 31 of 154

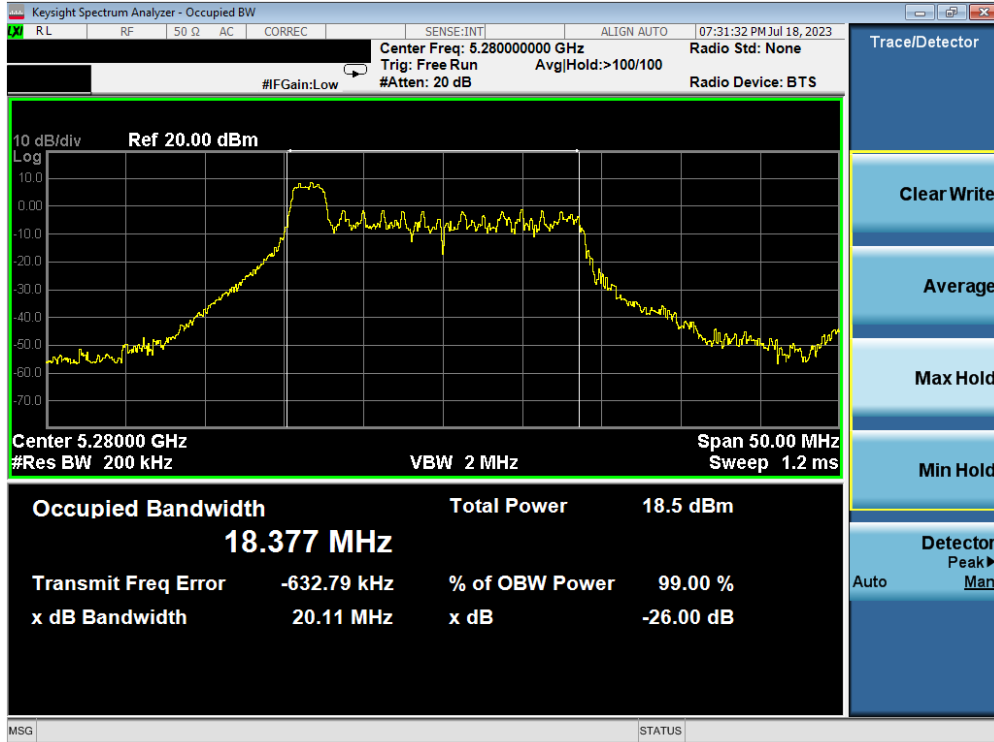


Plot 7-27. 26dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 56)

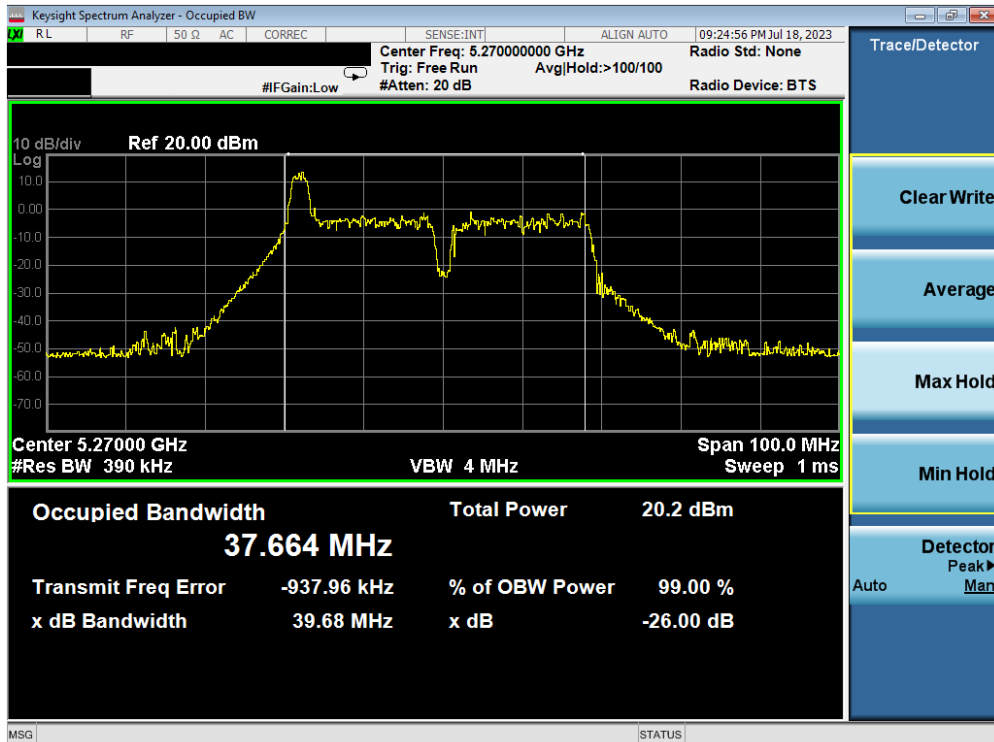


Plot 7-28. 26dB Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 32 of 154

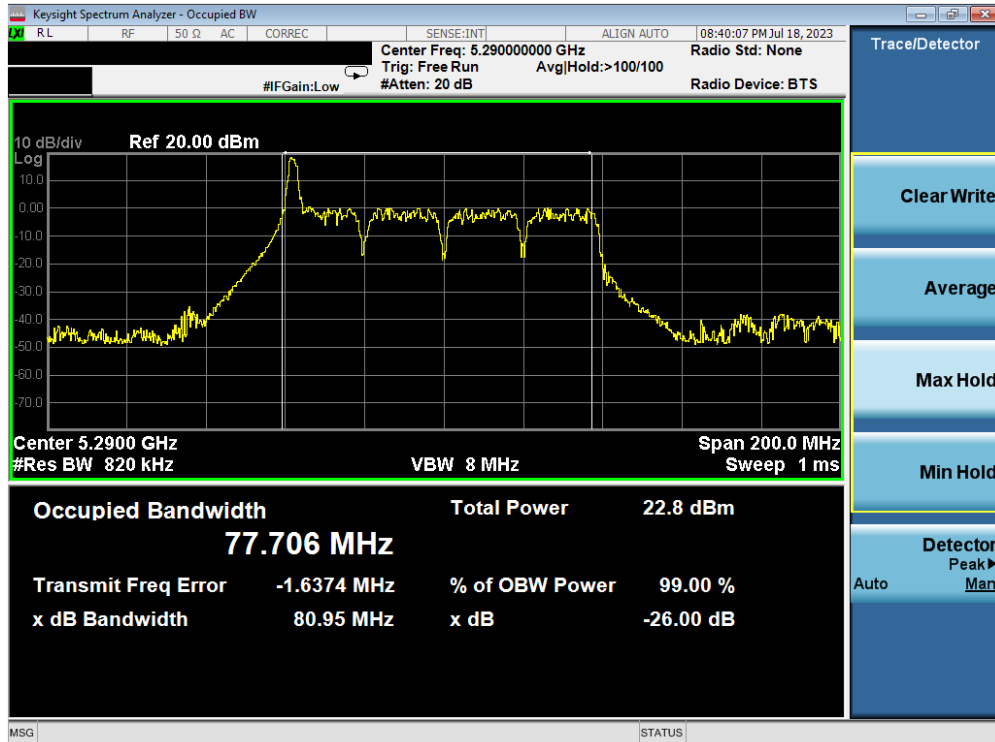


Plot 7-29. 26dB Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 58)

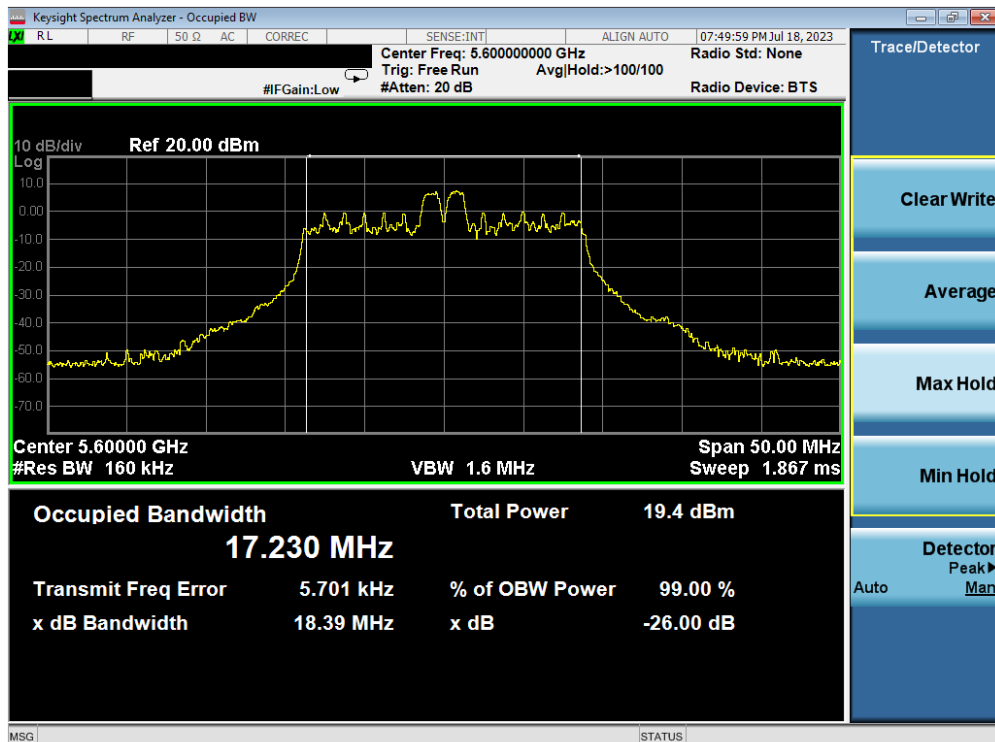


Plot 7-30. 26dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 33 of 154

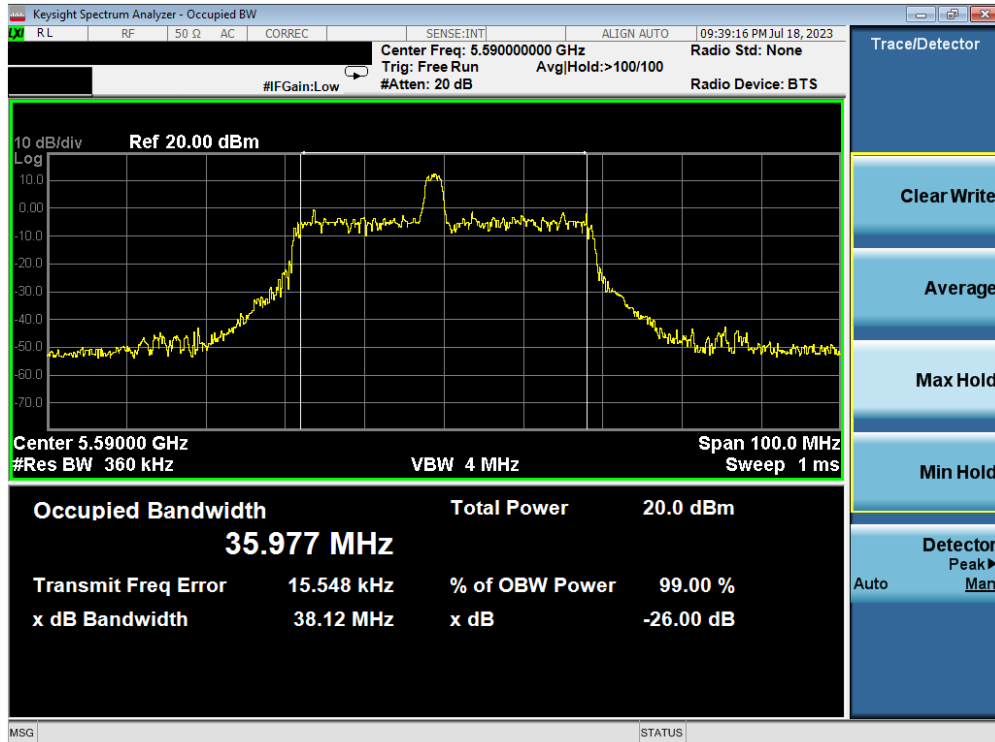


Plot 7-31. 26dB Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 118)

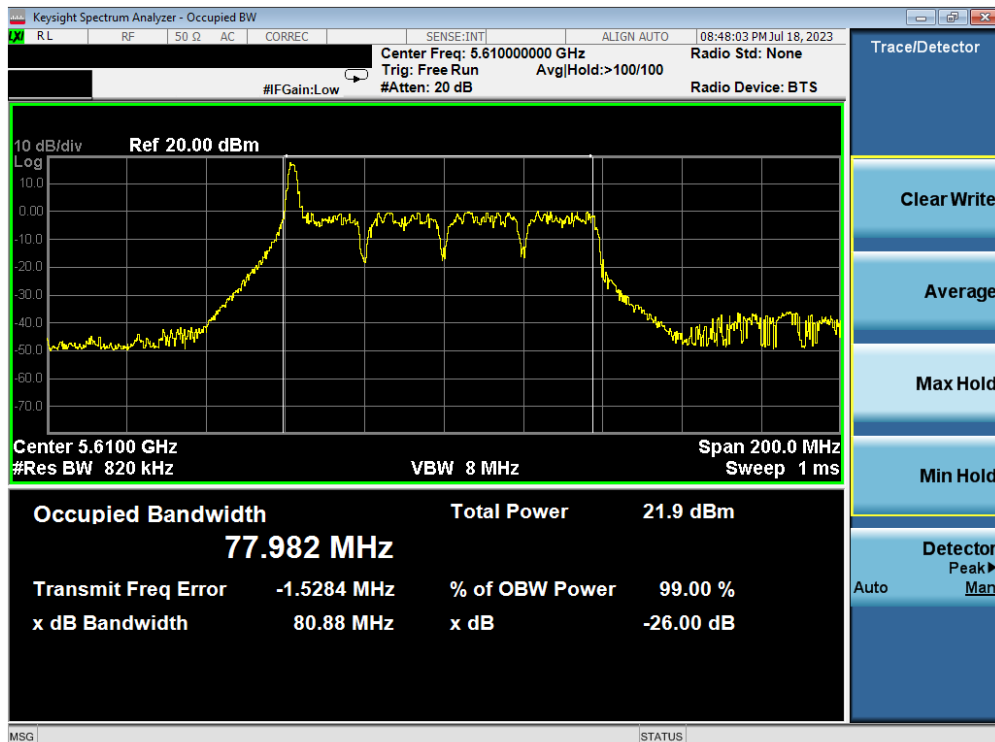


Plot 7-32. 26dB Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 34 of 154

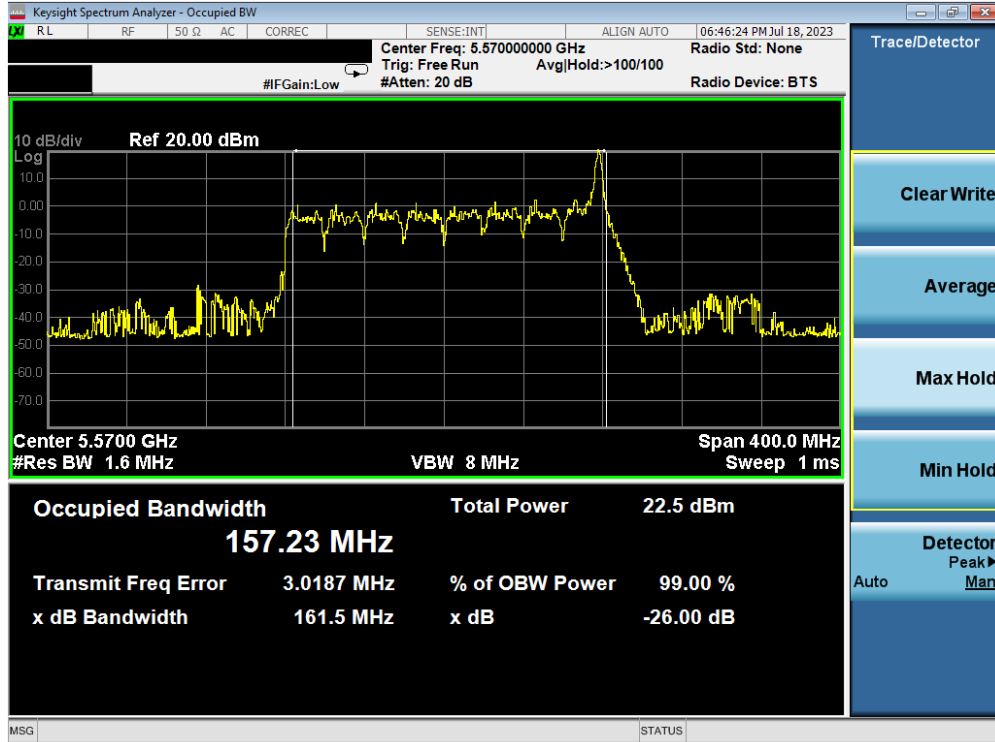


Plot 7-33. 26dB Bandwidth Plot MIMO ANT2 (160MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 114)

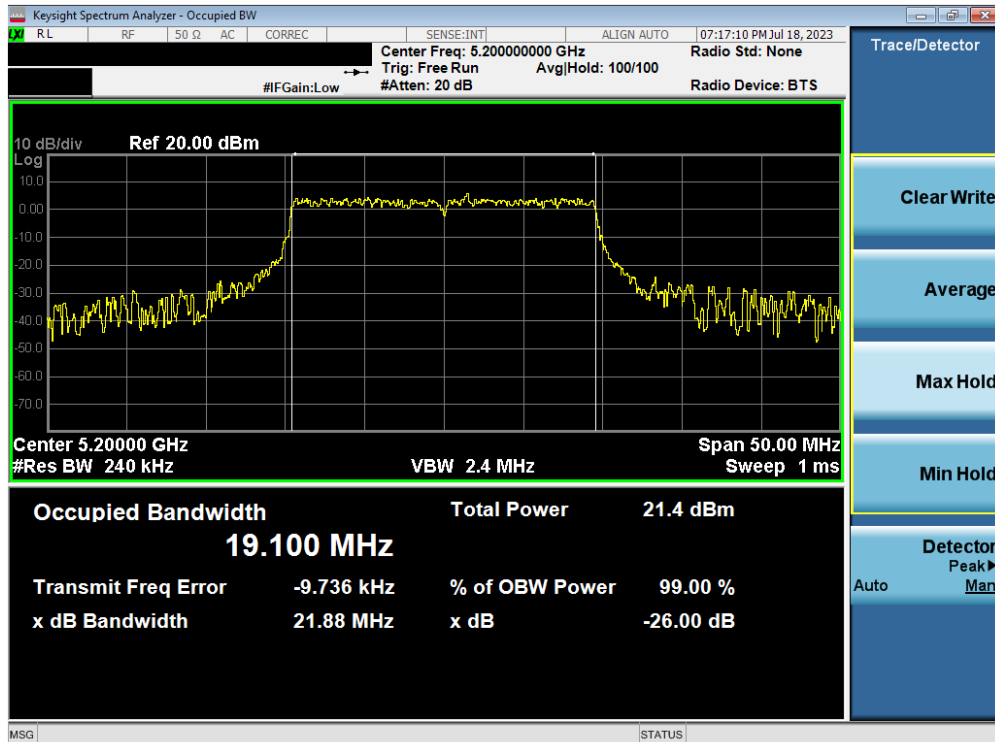


Plot 7-34. 26dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 1) – Ch. 40)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 35 of 154

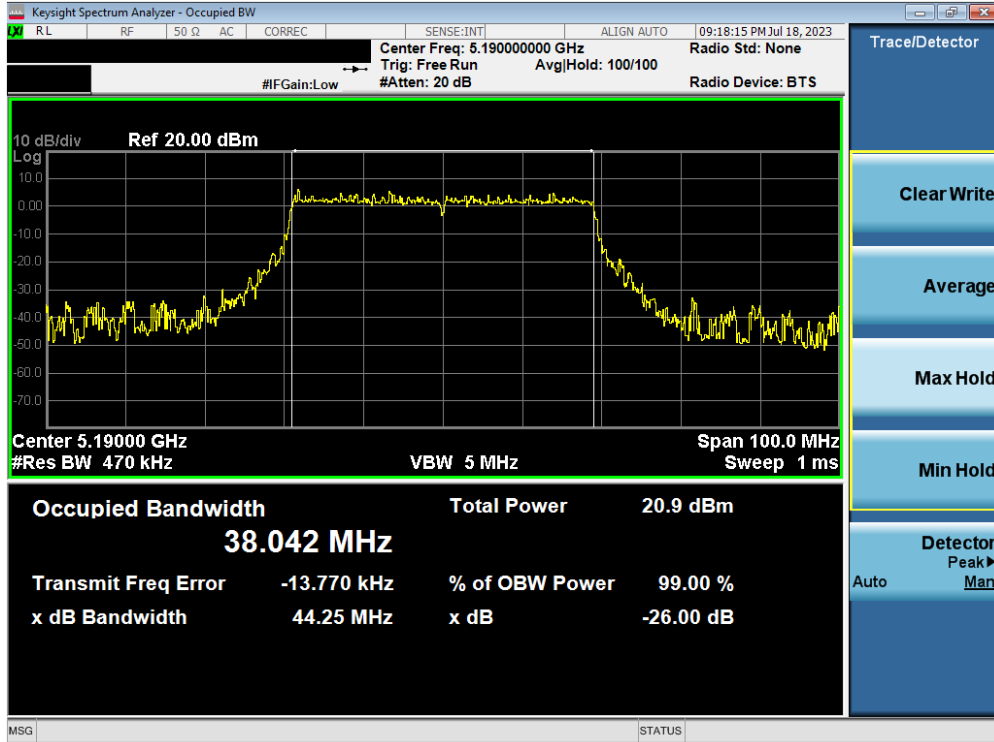


Plot 7-35. 26dB Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 1) – Ch. 38)

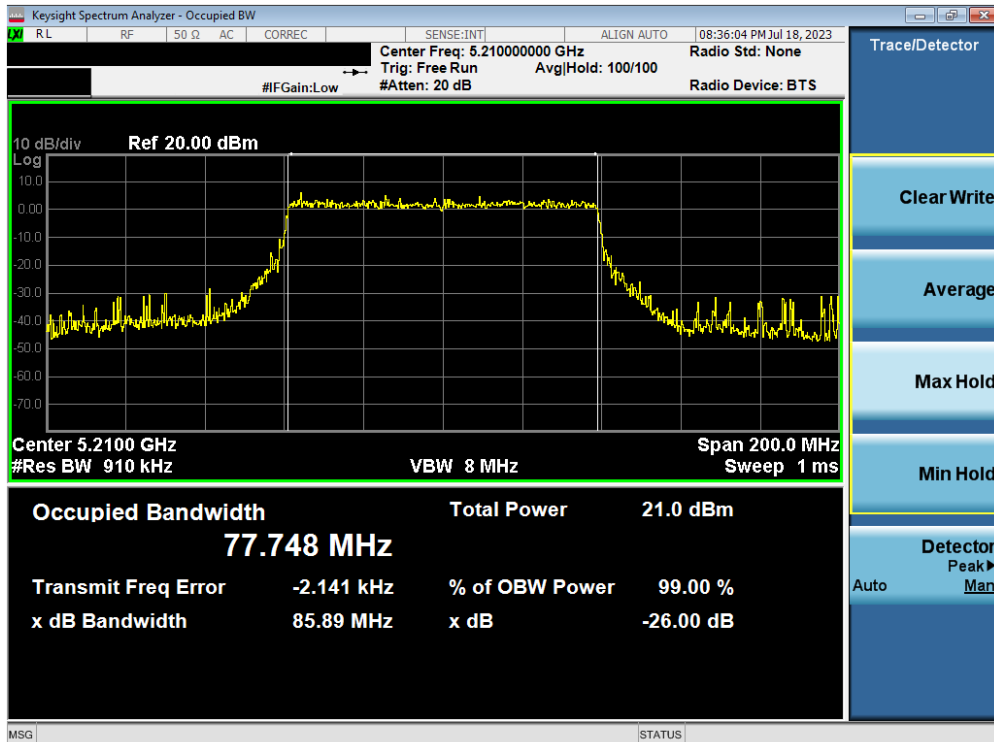


Plot 7-36. 26dB Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax – 996 Tones (UNII Band 1) – Ch. 42)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 36 of 154

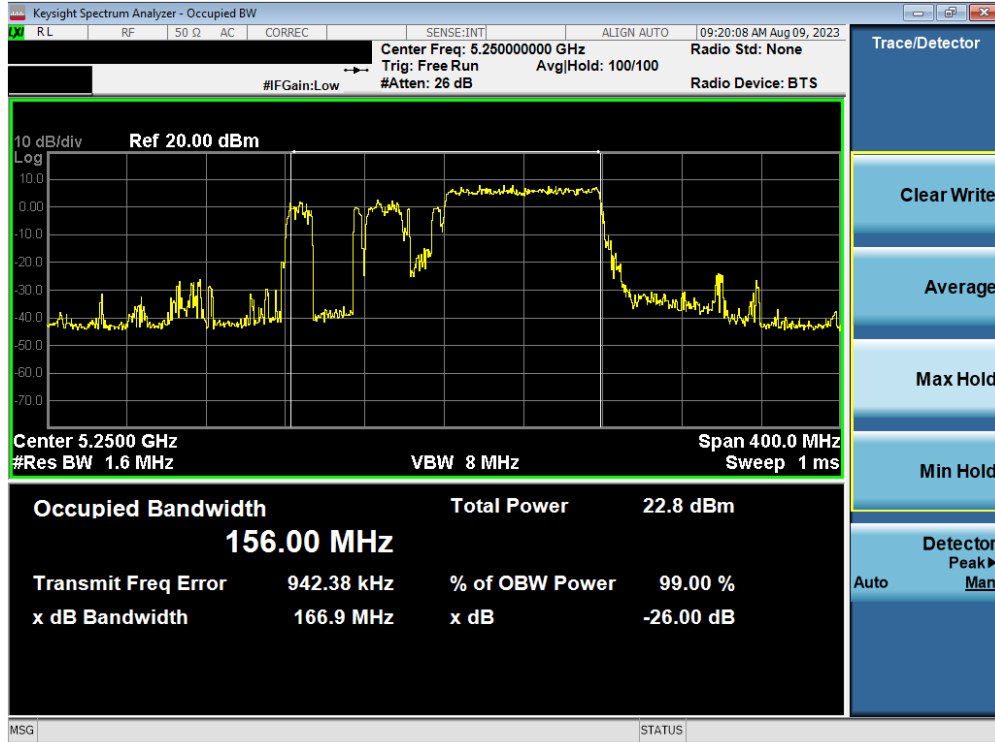


Plot 7-37. 26dB Bandwidth Plot MIMO ANT2 (160MHz BW 802.11ax – 996 Tones (UNII Band 1/2A) – Ch. 50)

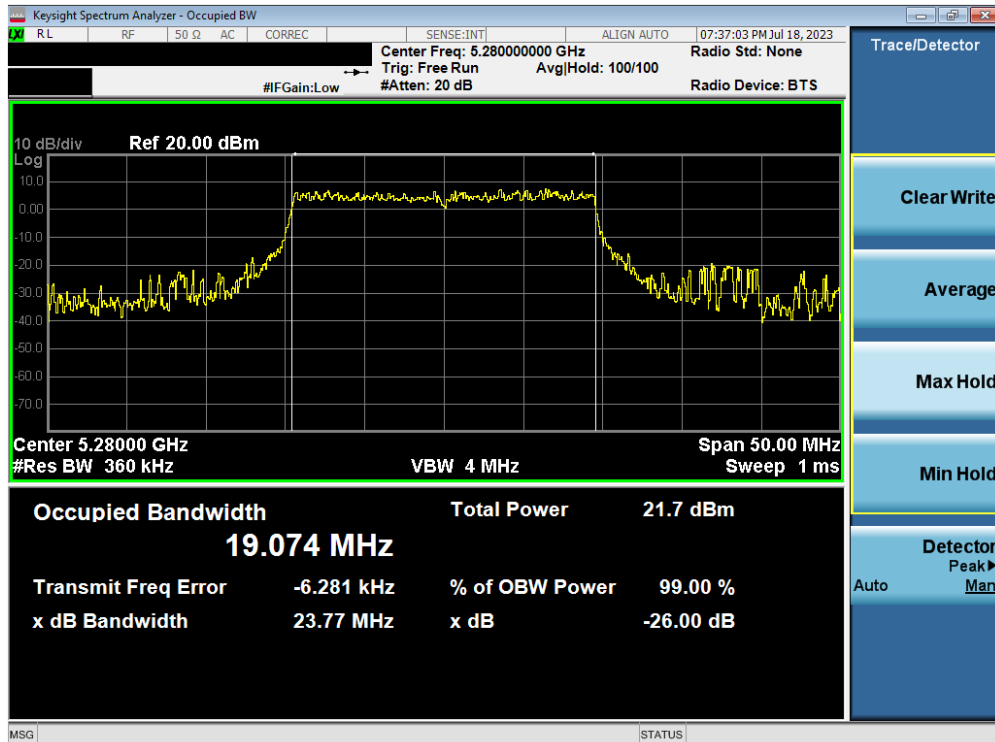


Plot 7-38. 26dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 37 of 154

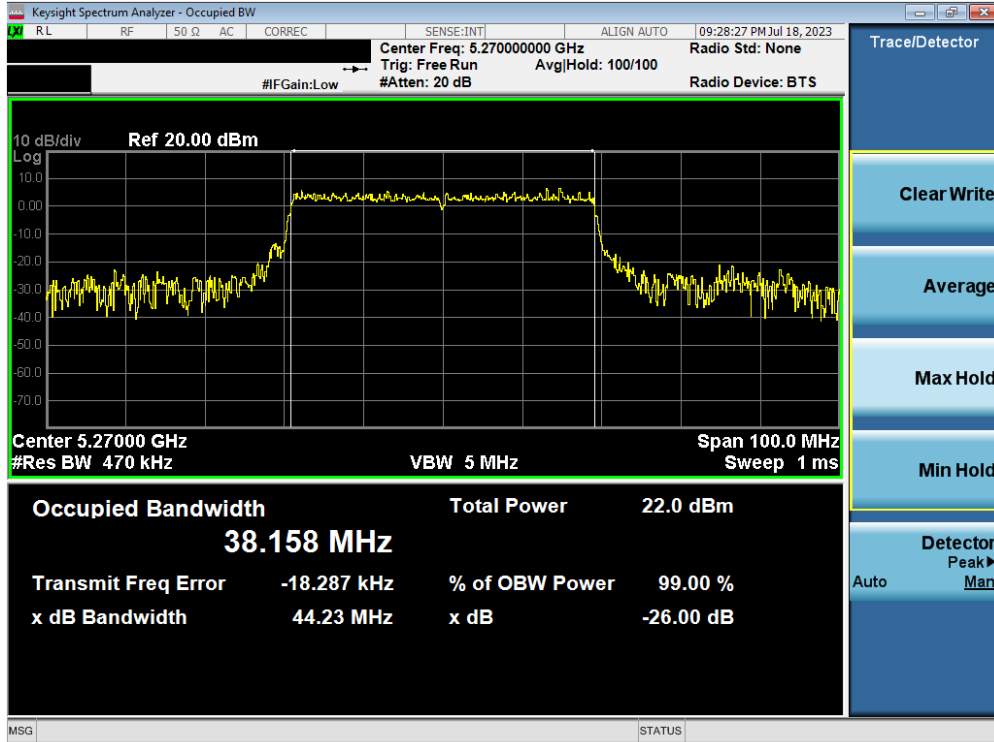


Plot 7-39. 26dB Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 2A) – Ch. 54)

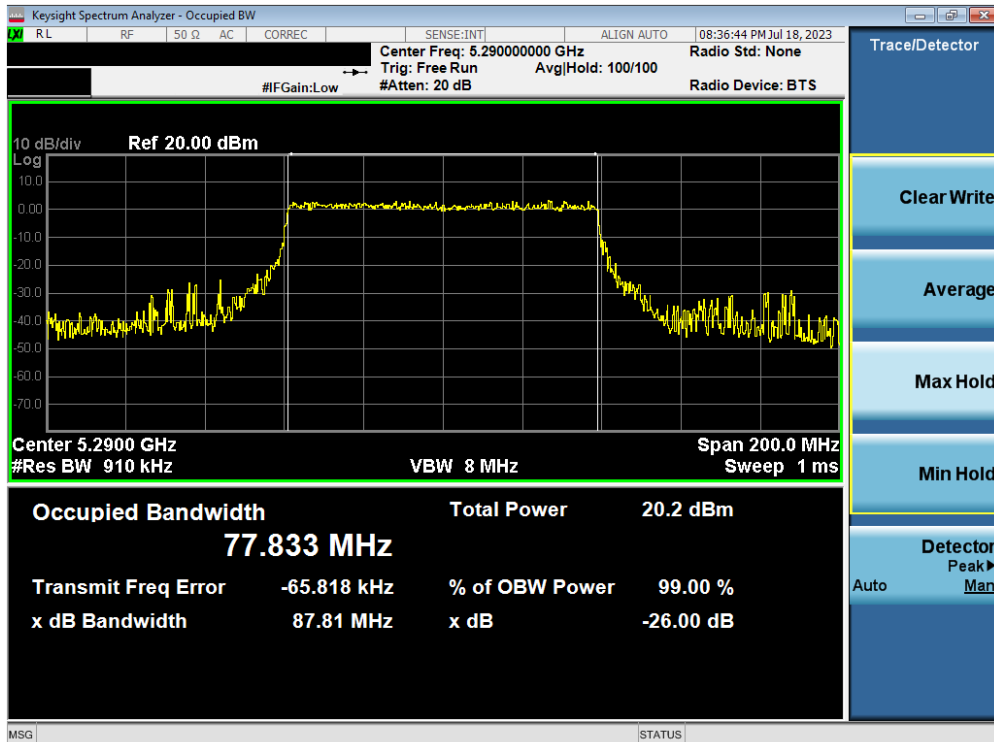


Plot 7-40. 26dB Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax – 996 Tones (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 38 of 154

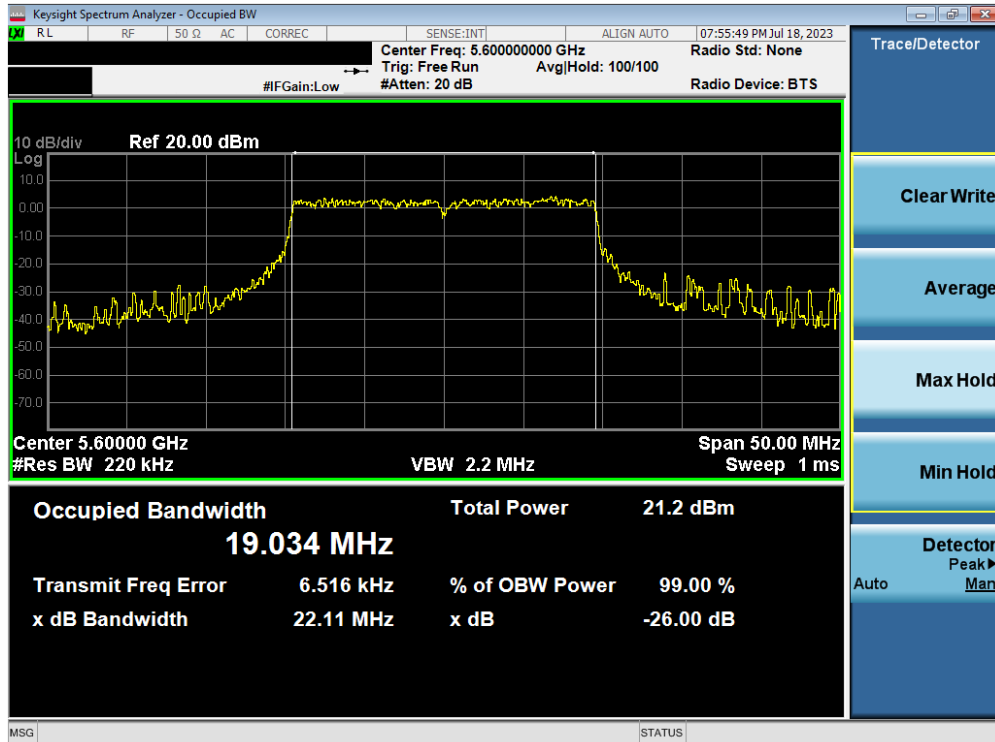


Plot 7-41. 26dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 2C) – Ch. 120)

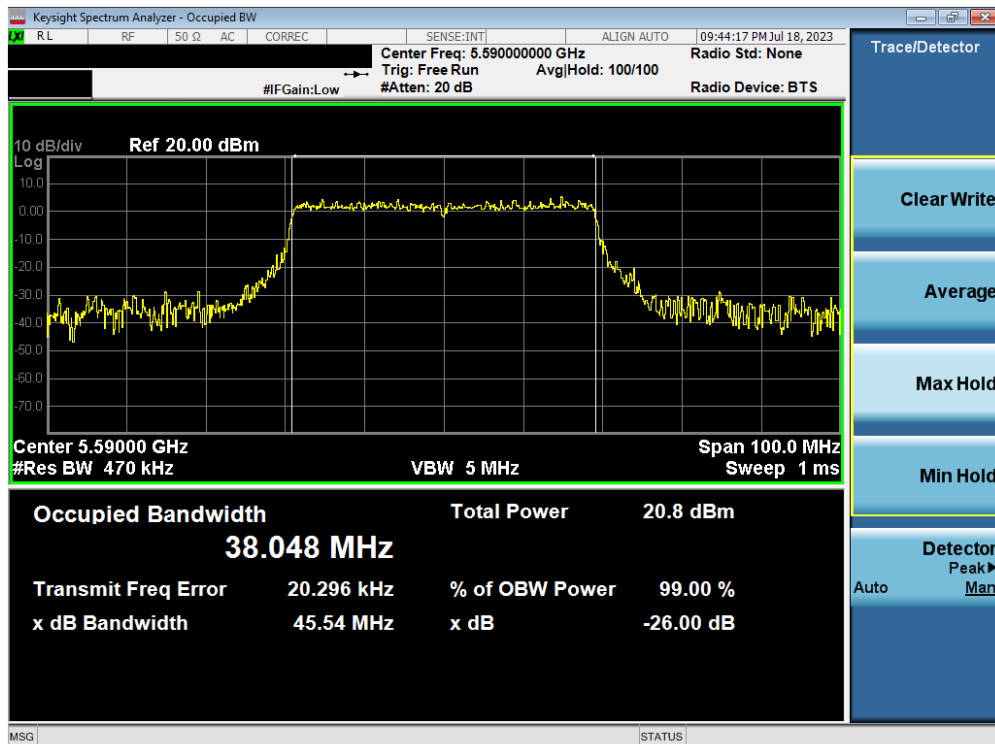


Plot 7-42. 26dB Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 2C) – Ch. 118)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 39 of 154

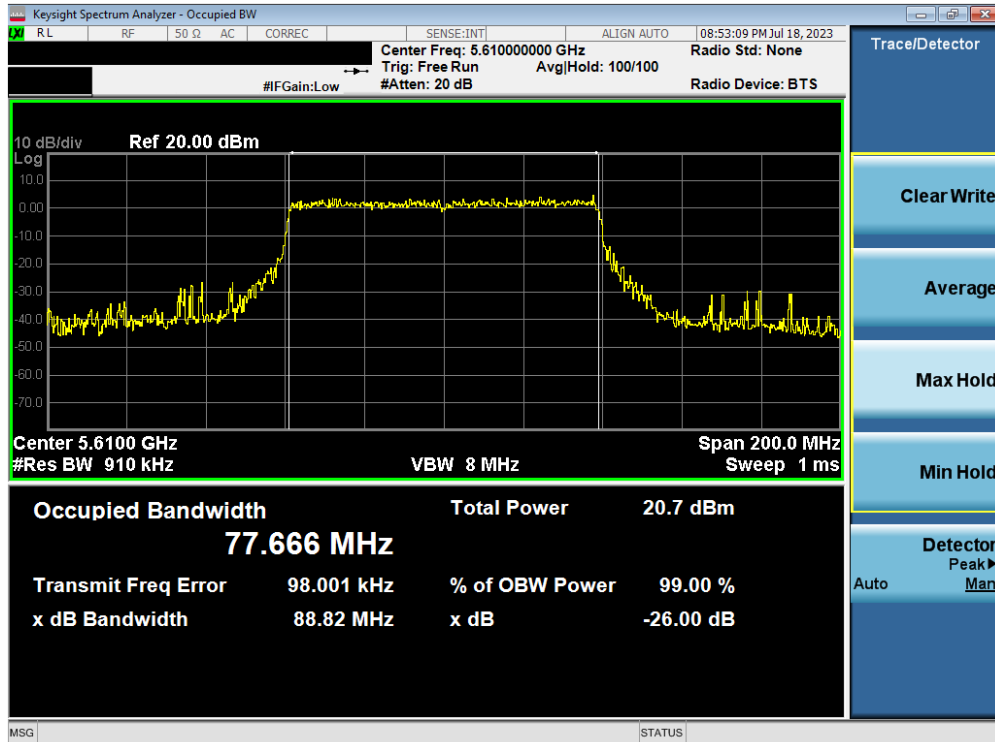

Plot 7-43. 26dB Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax – 996 Tones (UNII Band 2C) – Ch. 122)

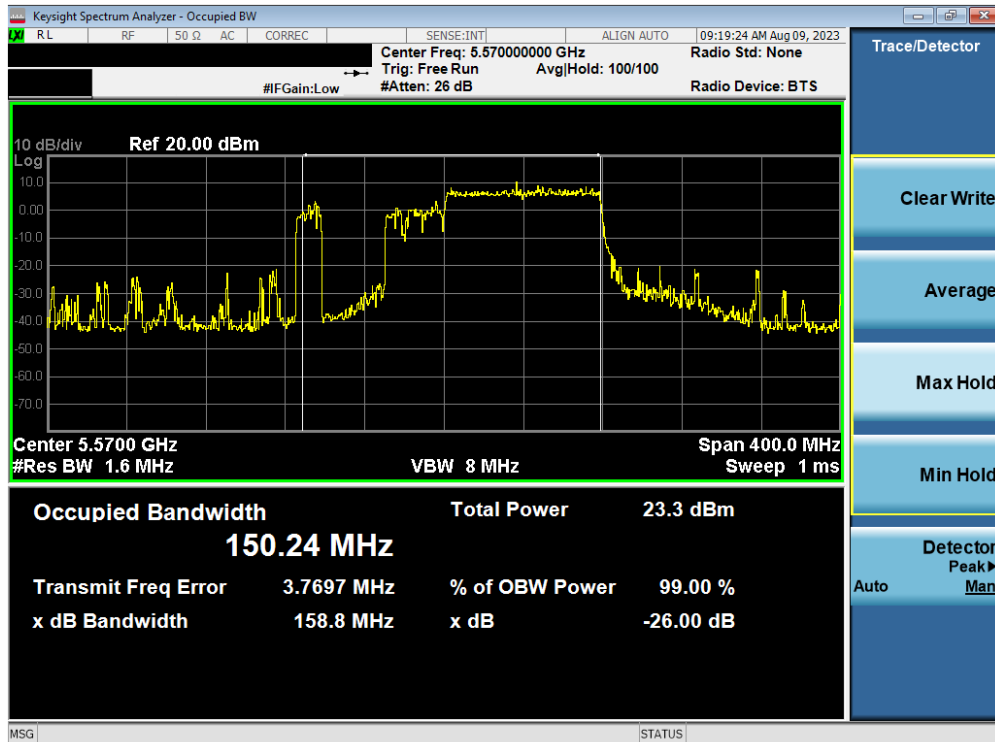

Plot 7-44. 26dB Bandwidth Plot MIMO ANT2 (160MHz BW 802.11ax – 996 Tones (UNII Band 2C) – Ch. 114)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 40 of 154

7.3 6dB Bandwidth Measurement

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

In the 5.725 – 5.850GHz and 5.850-5.895GHz bands, the 6dB bandwidth must be ≥ 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 6.9.2

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes

The 6dB Bandwidth measurement for each channel was measured with the RU index showing the highest conducted power.

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 41 of 154

MIMO 6dB Bandwidth Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3	5745	149	ax (20MHz)	26T	MCS0	2.17
	5785	157	ax (20MHz)	26T	MCS0	2.73
	5825	165	ax (20MHz)	26T	MCS0	2.14
	5755	151	ax (40MHz)	26T	MCS0	2.17
	5795	159	ax (40MHz)	26T	MCS0	2.18
	5775	155	ax (80MHz)	26T	MCS0	2.93

Table 7-6. Band 3 Conducted 6dB Bandwidth Measurements MIMO ANT1 (26 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3/4	5845	169	ax (20MHz)	26T	MCS0	2.66
Band 4	5865	173	ax (20MHz)	26T	MCS0	2.64
	5885	177	ax (20MHz)	26T	MCS0	2.76
Band 3/4	5835	167	ax (40MHz)	26T	MCS0	2.16
Band 4	5875	175	ax (40MHz)	26T	MCS0	2.19
Band 3/4	5855	171	ax (80MHz)	26T	MCS0	2.31
	5815	163	ax (160MHz)	26T	MCS0	2.64

Table 7-7. Bands 3/4 Conducted 6dB Bandwidth Measurements MIMO ANT1 (26 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3	5745	149	ax (20MHz)	26T	MCS0	2.13
	5785	157	ax (20MHz)	26T	MCS0	2.69
	5825	165	ax (20MHz)	26T	MCS0	2.16
	5755	151	ax (40MHz)	26T	MCS0	2.15
	5795	159	ax (40MHz)	26T	MCS0	2.16
	5775	155	ax (80MHz)	26T	MCS0	2.86

Table 7-8. Band 3 Conducted 6dB Bandwidth Measurements MIMO ANT2 (26 Tones)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 42 of 154

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3/4	5845	169	ax (20MHz)	26T	MCS0	2.69
Band 4	5865	173	ax (20MHz)	26T	MCS0	2.70
	5885	177	ax (20MHz)	26T	MCS0	2.68
Band 3/4	5835	167	ax (40MHz)	26T	MCS0	2.20
Band 4	5875	175	ax (40MHz)	26T	MCS0	2.21
Band 3/4	5855	171	ax (80MHz)	26T	MCS0	2.27
	5815	163	ax (160MHz)	26T	MCS0	2.52

Table 7-9. Bands 3/4 Conducted 6dB Bandwidth Measurements MIMO ANT2 (26 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3	5745	149	ax (20MHz)	242T	MCS0	19.05
	5785	157	ax (20MHz)	242T	MCS0	19.04
	5825	165	ax (20MHz)	242T	MCS0	19.03
	5755	151	ax (40MHz)	484T	MCS0	38.24
	5795	159	ax (40MHz)	484T	MCS0	38.14
	5775	155	ax (80MHz)	996T	MCS0	78.09

Table 7-10. Band 3 Conducted 6dB Bandwidth Measurements MIMO ANT1 (Full Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3/4	5845	169	ax (20MHz)	242T	MCS0	19.10
Band 4	5865	173	ax (20MHz)	242T	MCS0	19.03
	5885	177	ax (20MHz)	242T	MCS0	19.08
Band 3/4	5835	167	ax (40MHz)	484T	MCS0	38.17
Band 4	5875	175	ax (40MHz)	484T	MCS0	38.21
Band 3/4	5855	171	ax (80MHz)	996T	MCS0	78.21
	5815	163	ax (160MHz)	996T	MCS0	157.31

Table 7-11. Bands 3/4 Conducted 6dB Bandwidth Measurements MIMO ANT1 (Full Tones)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 43 of 154

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3	5745	149	ax (20MHz)	242T	MCS0	19.07
	5785	157	ax (20MHz)	242T	MCS0	19.07
	5825	165	ax (20MHz)	242T	MCS0	19.03
	5755	151	ax (40MHz)	484T	MCS0	38.10
	5795	159	ax (40MHz)	484T	MCS0	38.17
	5775	155	ax (80MHz)	996T	MCS0	78.23


Table 7-12. Band 3 Conducted 6dB Bandwidth Measurements MIMO ANT2 (Full Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3/4	5845	169	ax (20MHz)	242T	MCS0	19.04
Band 4	5865	173	ax (20MHz)	242T	MCS0	19.08
	5885	177	ax (20MHz)	242T	MCS0	19.14
Band 3/4	5835	167	ax (40MHz)	484T	MCS0	38.15
Band 4	5875	175	ax (40MHz)	484T	MCS0	38.07
Band 3/4	5855	171	ax (80MHz)	996T	MCS0	78.22
	5815	163	ax (160MHz)	996T	MCS0	157.70


Table 7-13. Bands 3/4 Conducted 6dB Bandwidth Measurements MIMO ANT2 (Full Tones)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 44 of 154

7.3.1 MIMO Antenna-1 6dB Bandwidth Measurements

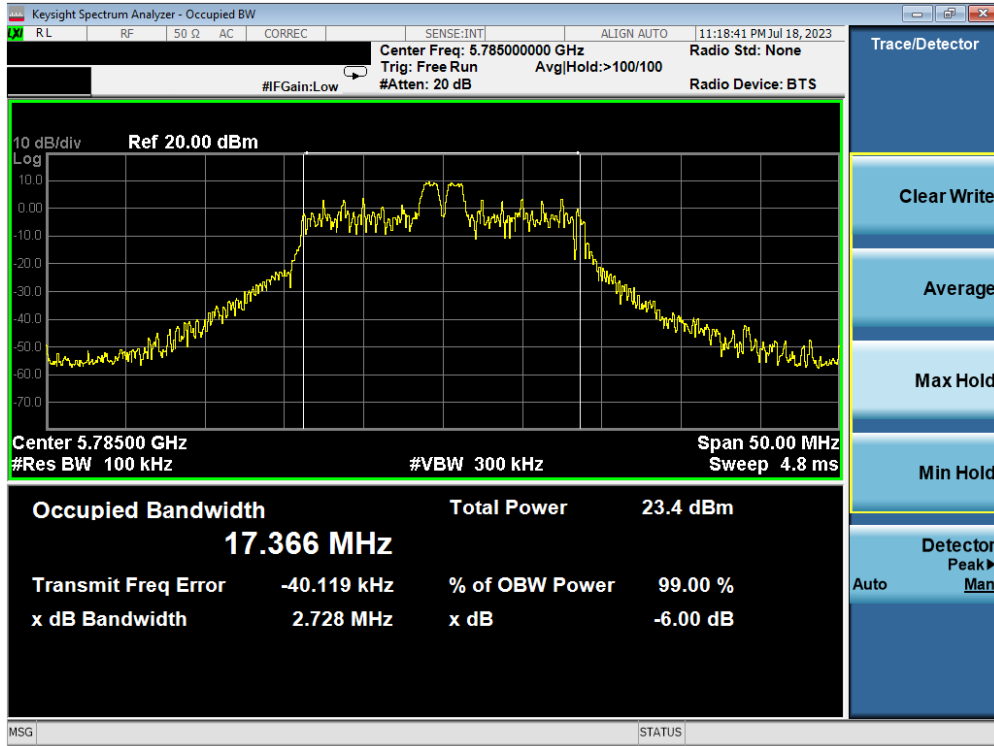


Plot 7-45. 6dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 157)

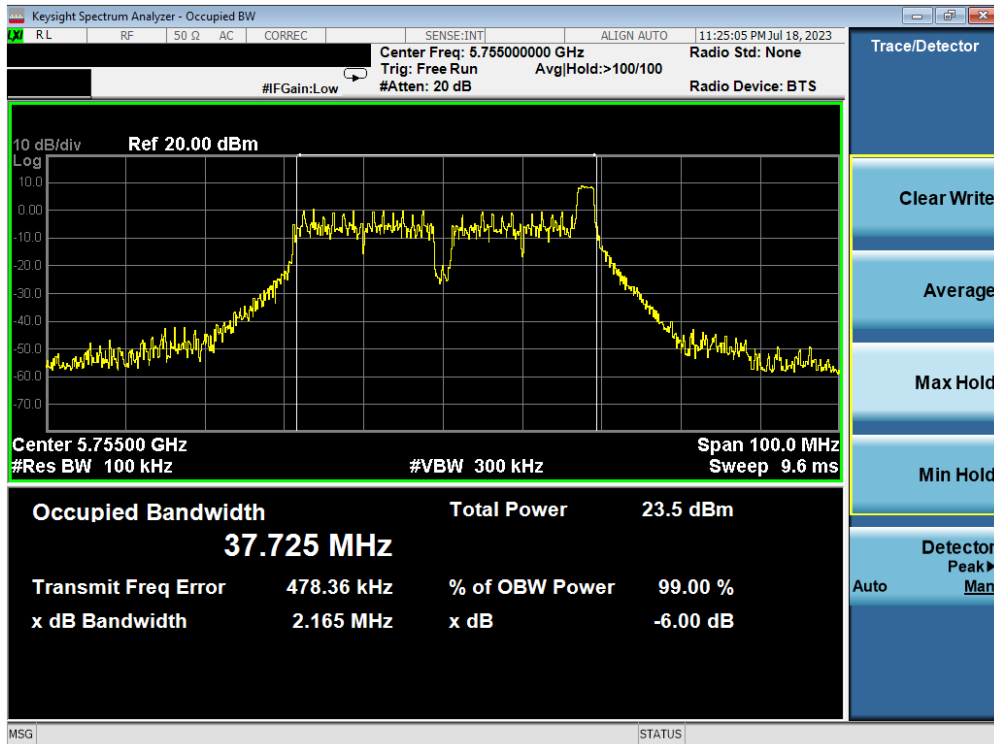


Plot 7-46. 6dB Bandwidth Plot MIMO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 151)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 45 of 154

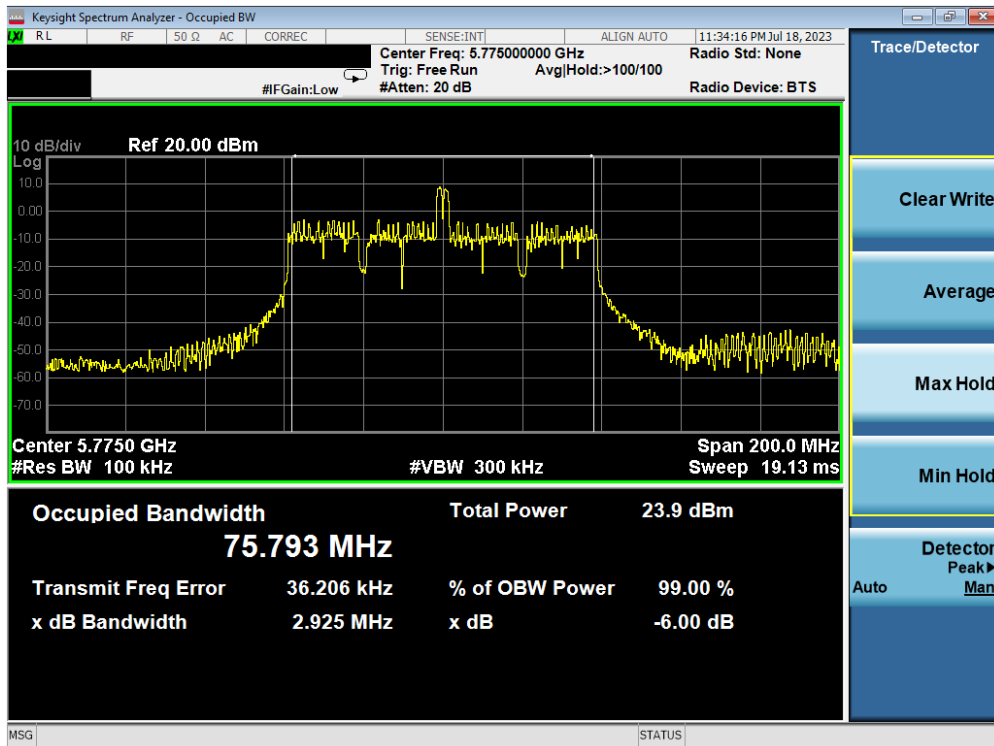


Plot 7-47. 6dB Bandwidth Plot MIMO ANT1 (80MHz BW 802.11ax – 26 Tones (Ull Band 3) – Ch. 155)

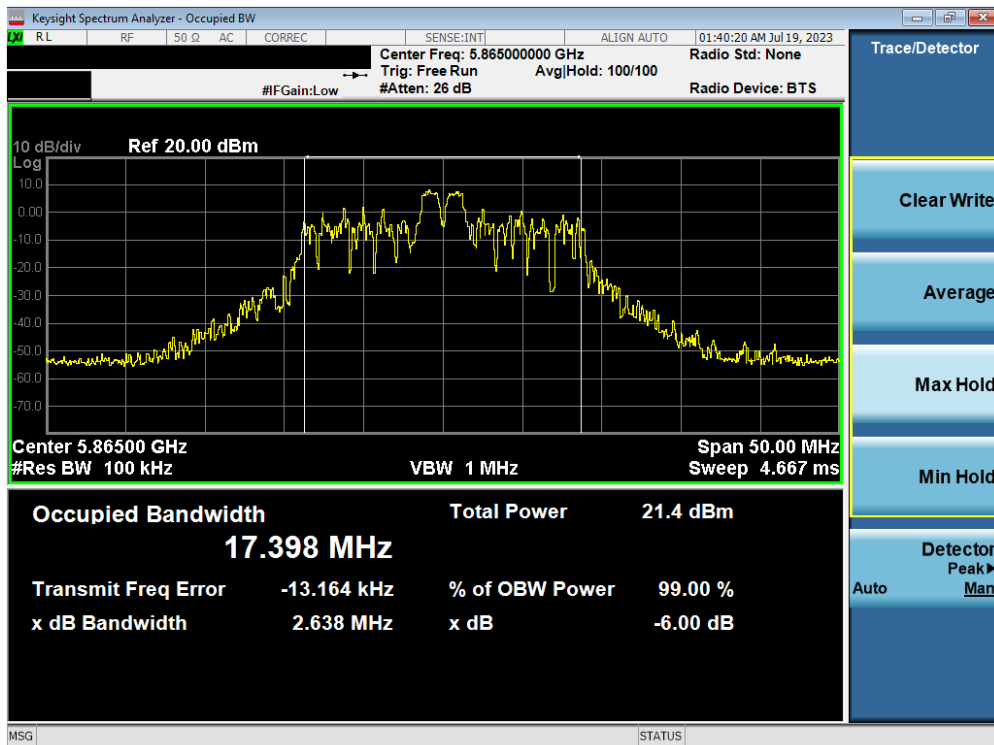


Plot 7-48. 6dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 26 Tones (Ull Band 4) – Ch. 173)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 46 of 154

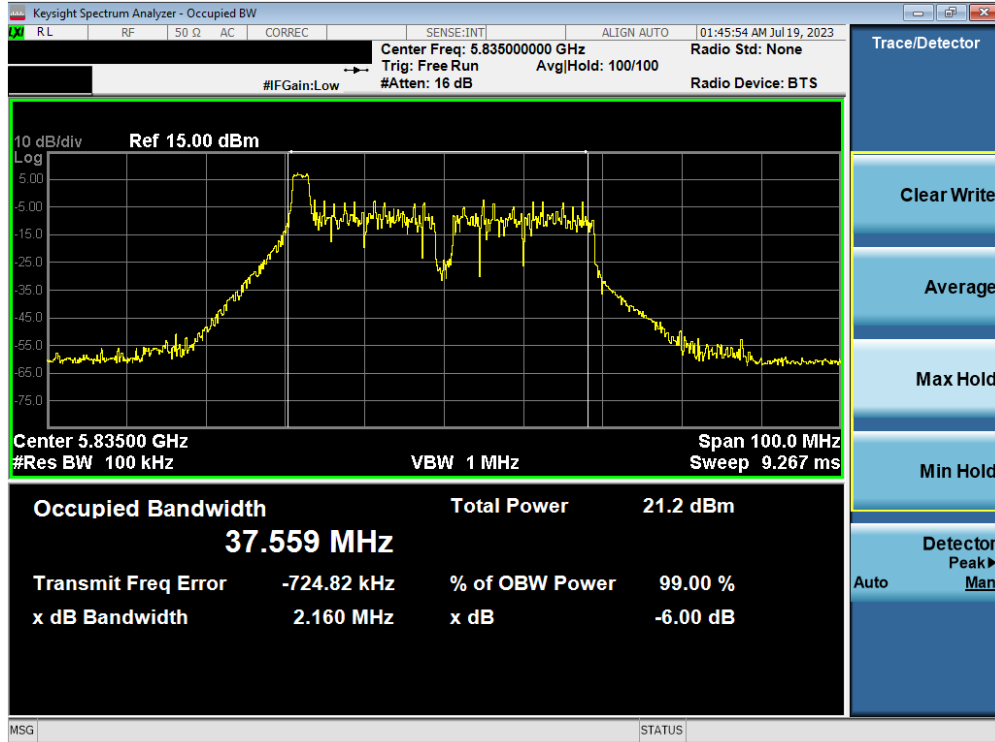


Plot 7-49. 6dB Bandwidth Plot MIMO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 3/4) – Ch. 167)

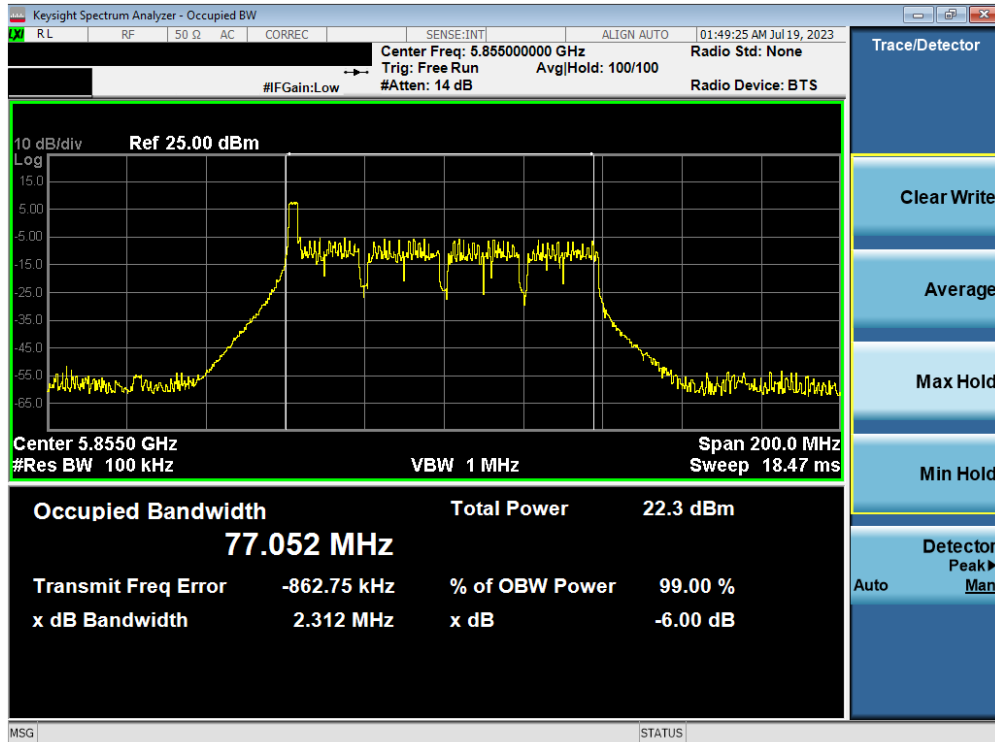


Plot 7-50. 6dB Bandwidth Plot MIMO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 3/4) – Ch. 171)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 47 of 154

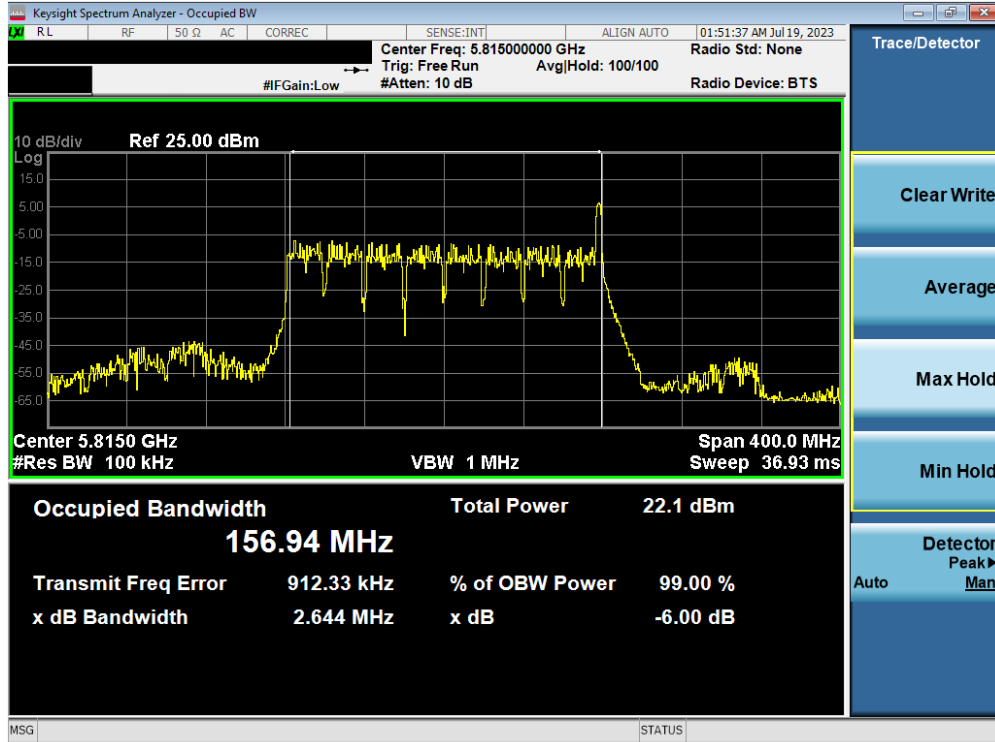


Plot 7-51. 6dB Bandwidth Plot MIMO ANT1 (160MHz BW 802.11ax – 26 Tones (UNII Band 3/4) – Ch. 163)

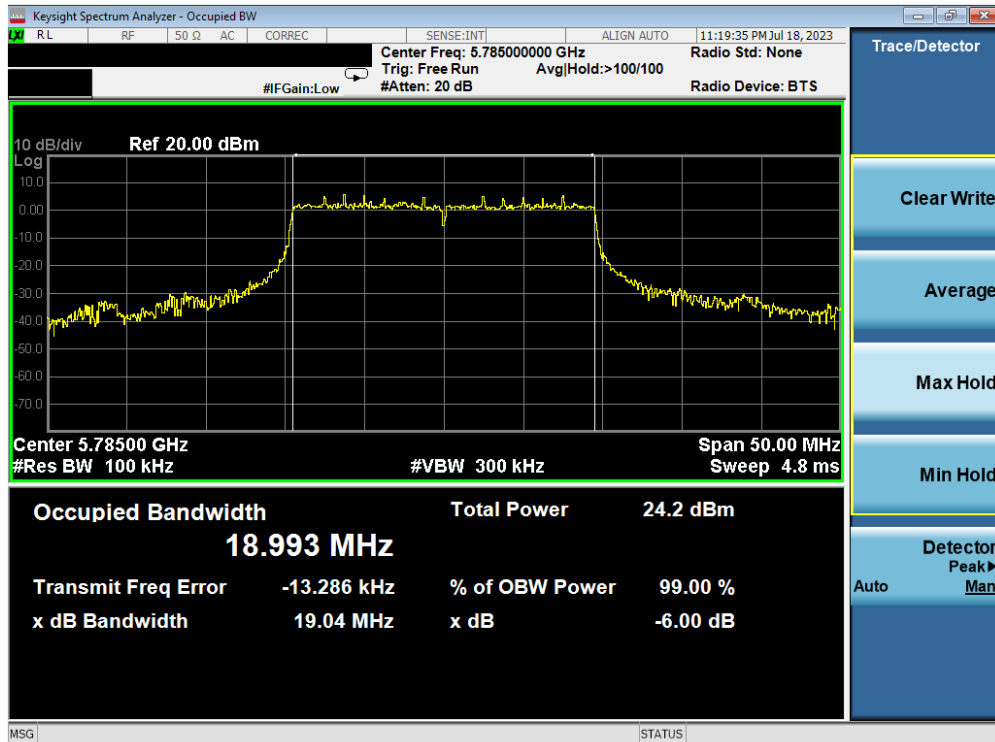


Plot 7-52. 6dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 3) – Ch. 157)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 48 of 154

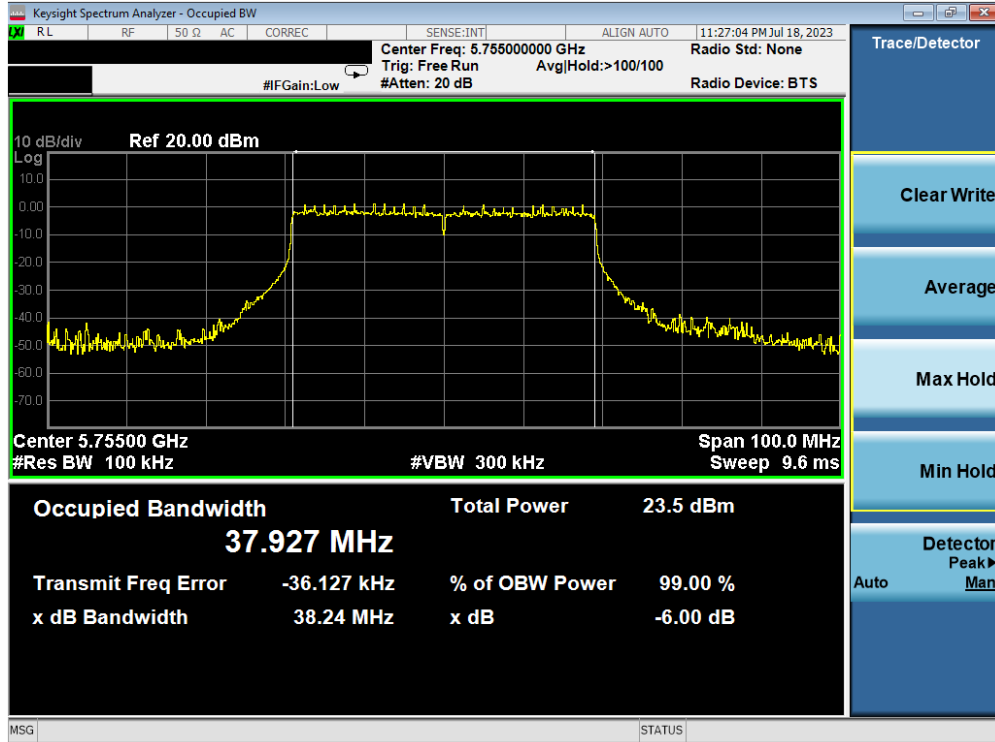


Plot 7-53. 6dB Bandwidth Plot MIMO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 3) – Ch. 151)

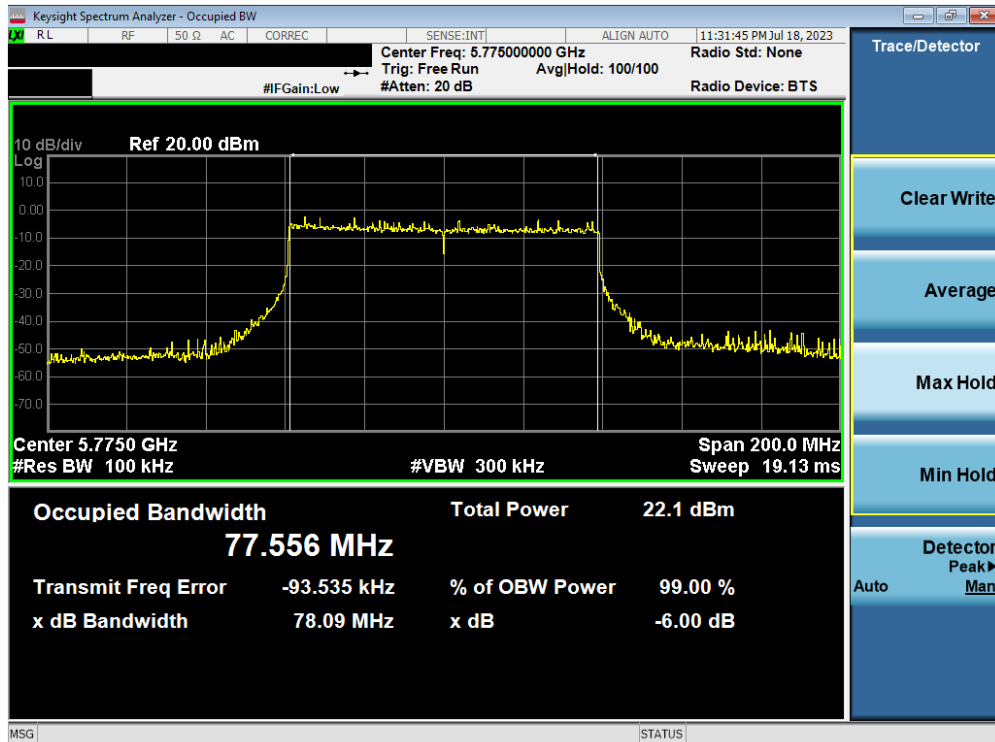


Plot 7-54. 6dB Bandwidth Plot MIMO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 3) – Ch. 155)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 49 of 154

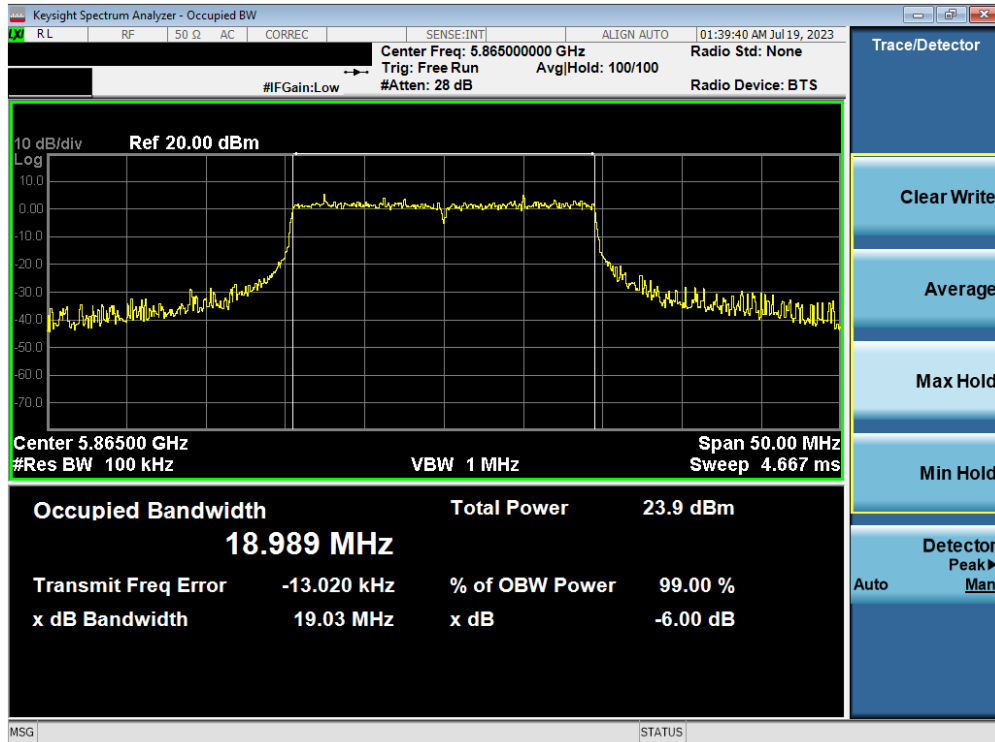


Plot 7-55. 6dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 4) – Ch. 173)

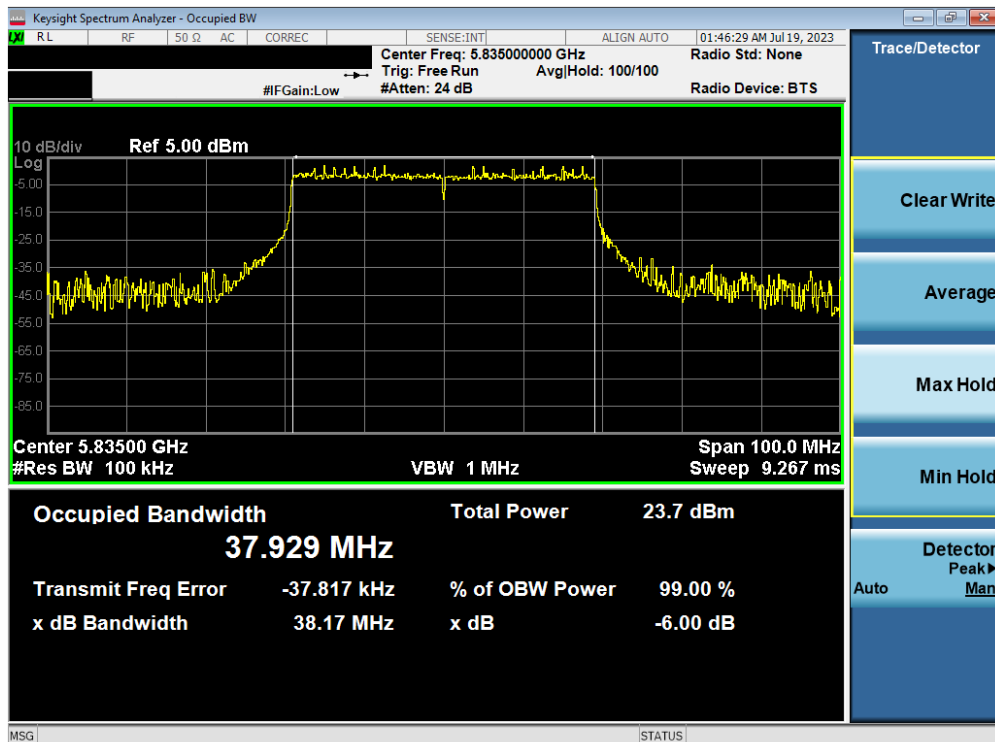


Plot 7-56. 6dB Bandwidth Plot MIMO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 3/4) – Ch. 167)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 50 of 154

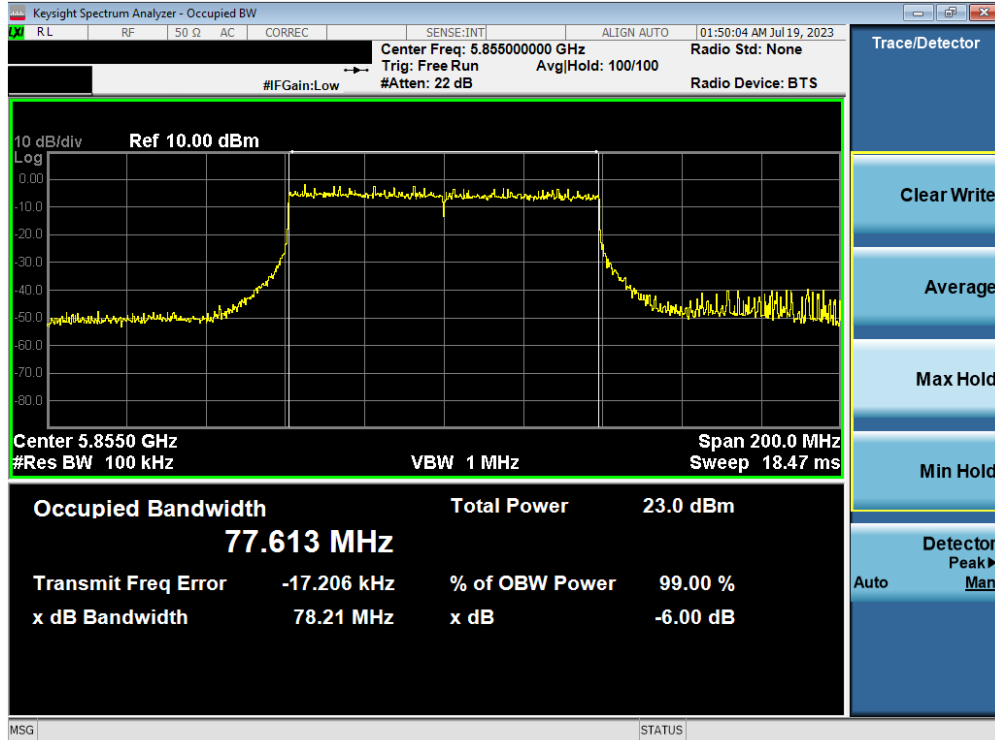


Plot 7-57. 6dB Bandwidth Plot MIMO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 3/4) – Ch. 171)

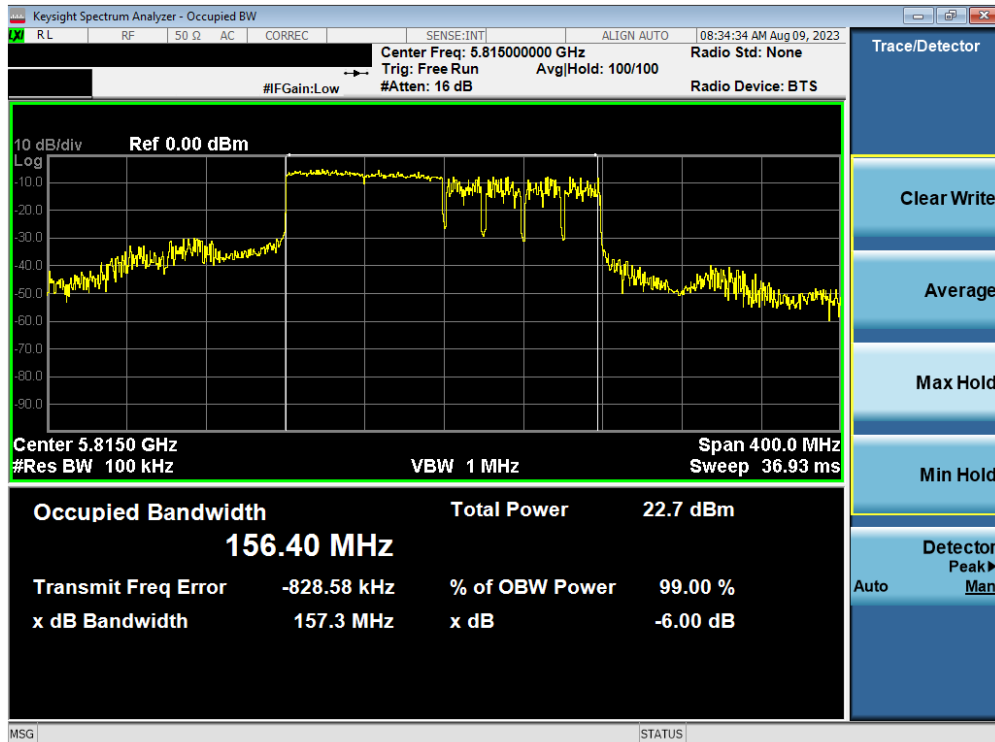


Plot 7-58. 6dB Bandwidth Plot MIMO ANT1 (160MHz BW 802.11ax – 996 Tones (UNII Band 3/4) – Ch. 163)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 51 of 154

7.3.2 MIMO Antenna-2 6dB Bandwidth Measurements

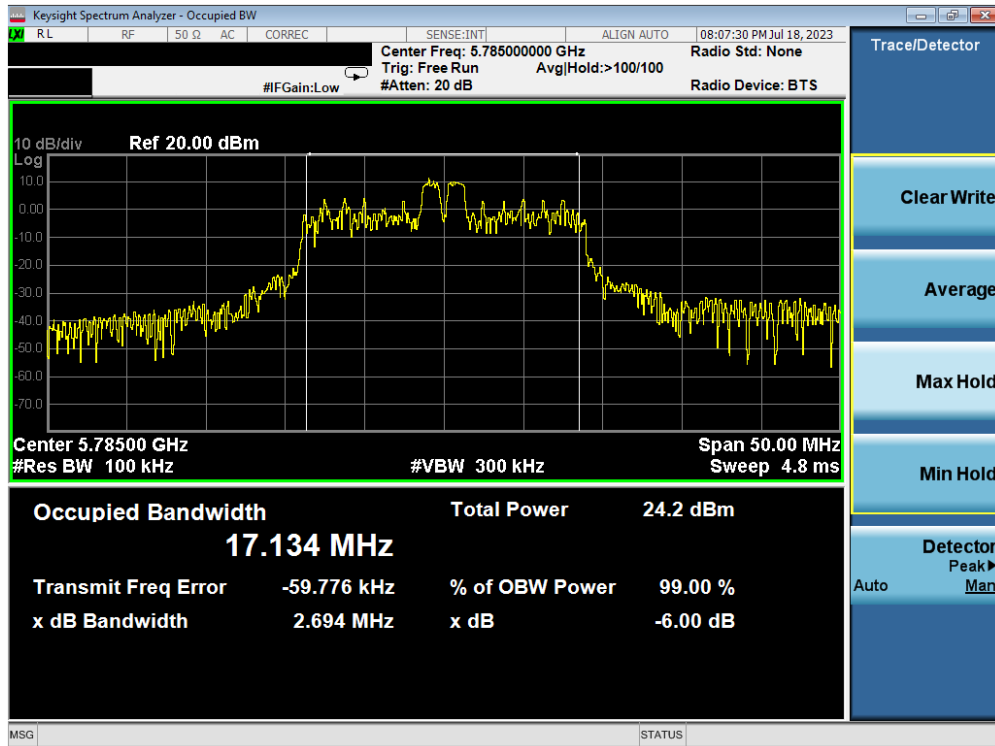


Plot 7-59. 6dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 157)

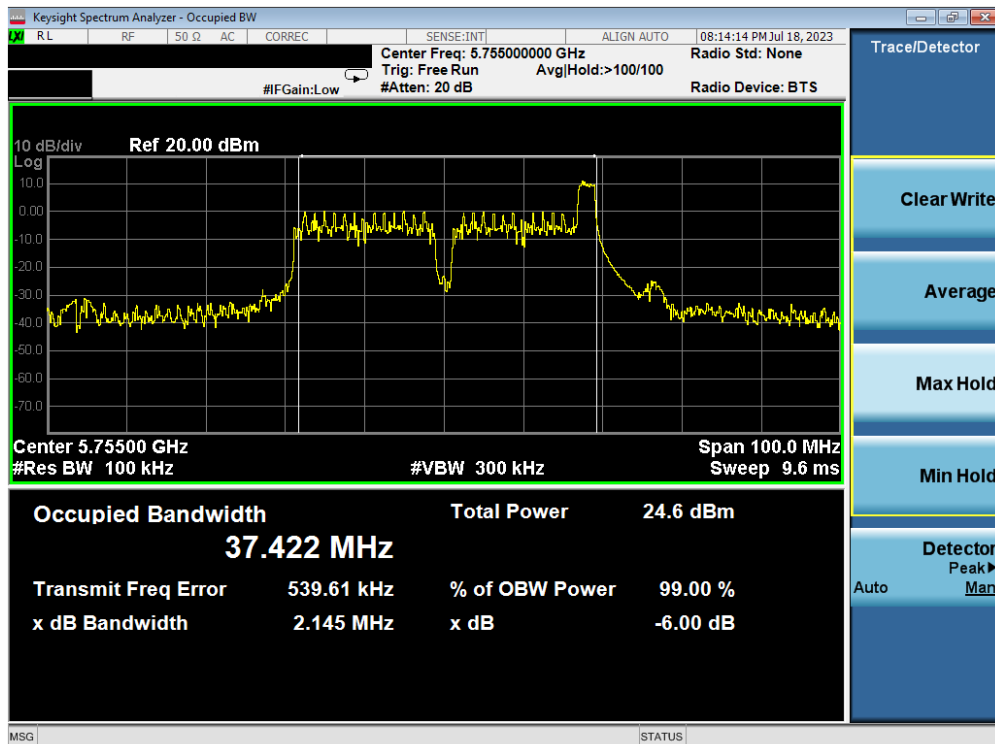


Plot 7-60. 6dB Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 151)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 52 of 154

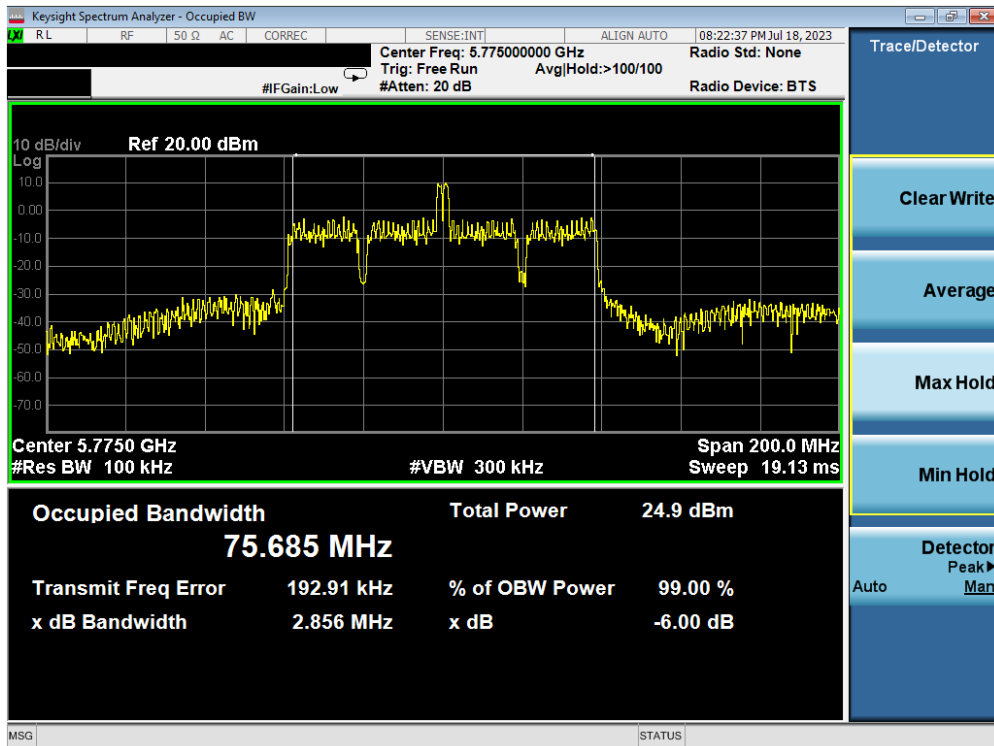


Plot 7-61. 6dB Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax – 26 Tones (Ull Band 3) – Ch. 155)

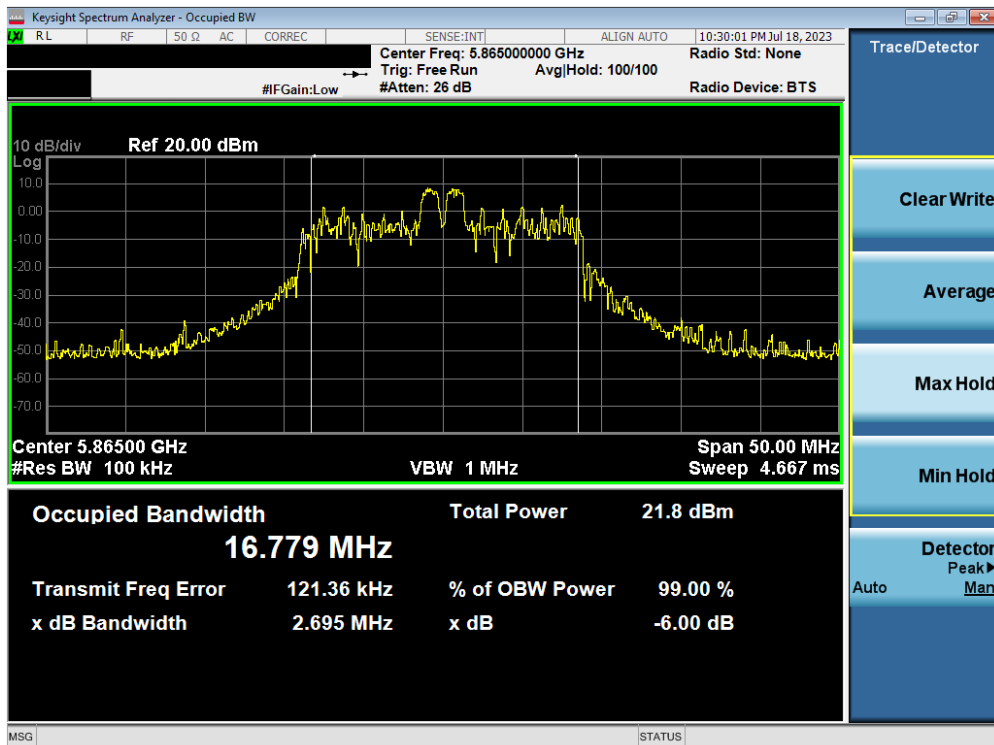


Plot 7-62. 6dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (Ull Band 4) – Ch. 173)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 53 of 154

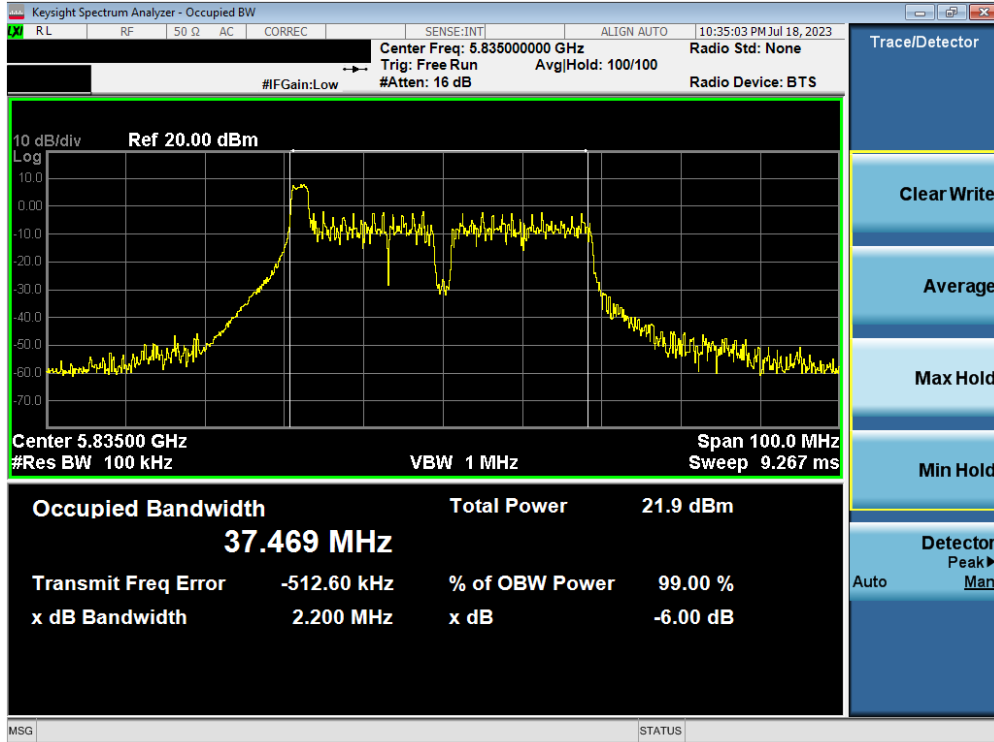


Plot 7-63. 6dB Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 3/4) – Ch. 167)

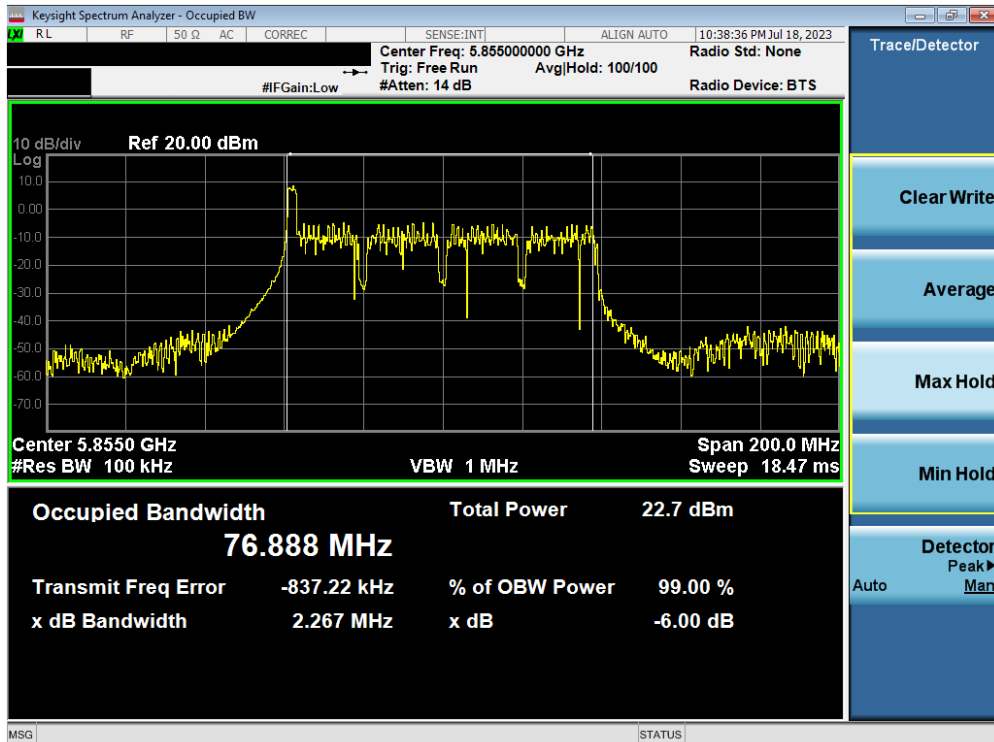


Plot 7-64. 6dB Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 3/4) – Ch. 171)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 54 of 154

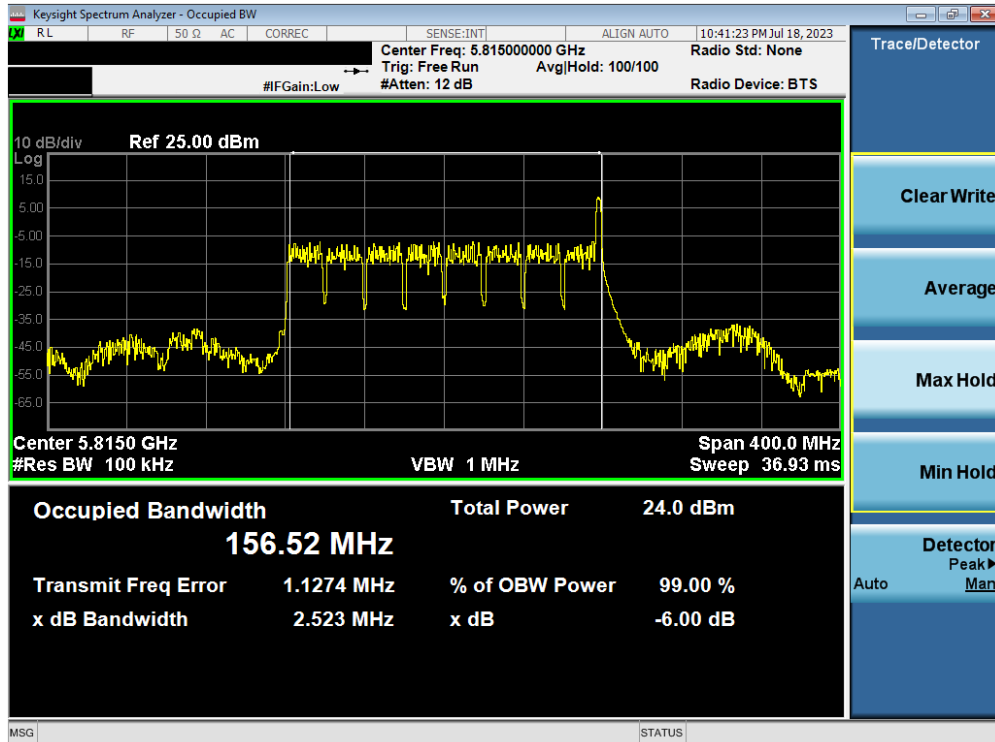


Plot 7-65. 6dB Bandwidth Plot MIMO ANT2 (160MHz BW 802.11ax – 26 Tones (UNII Band 3/4) – Ch. 163)

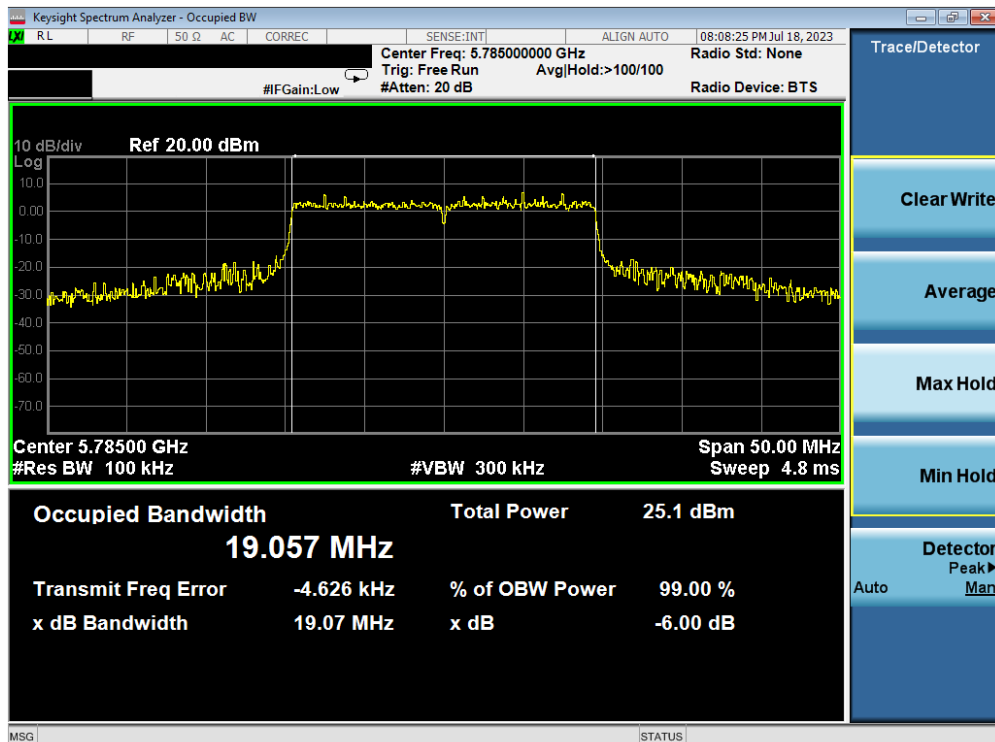


Plot 7-66. 6dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 3) – Ch. 157)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 55 of 154

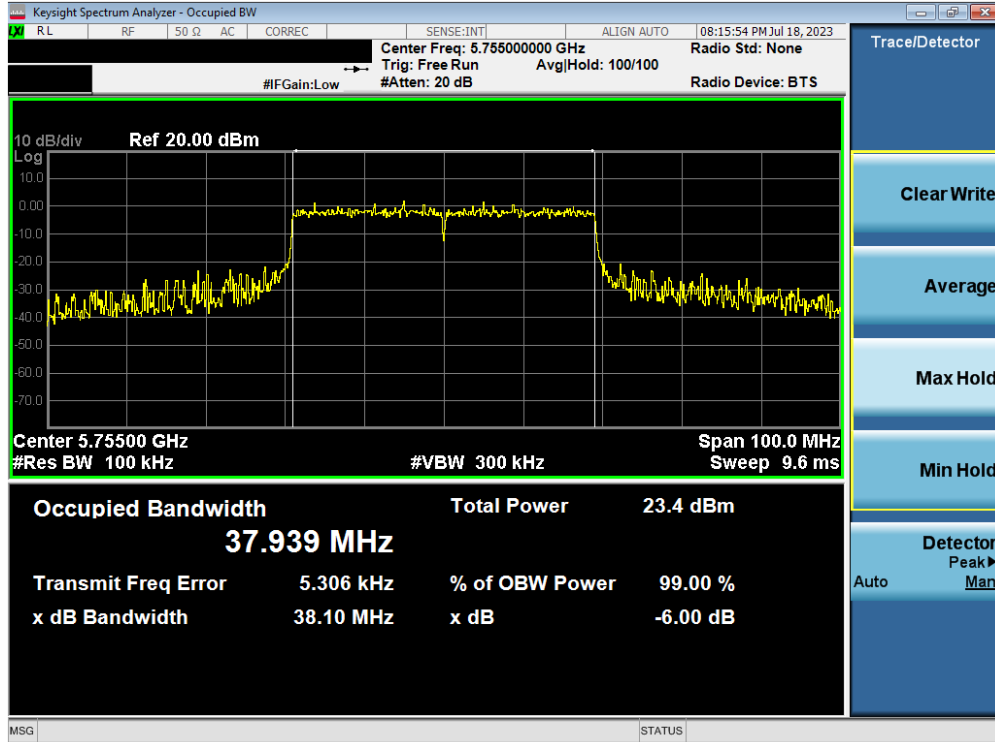


Plot 7-67. 6dB Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 3) – Ch. 151)

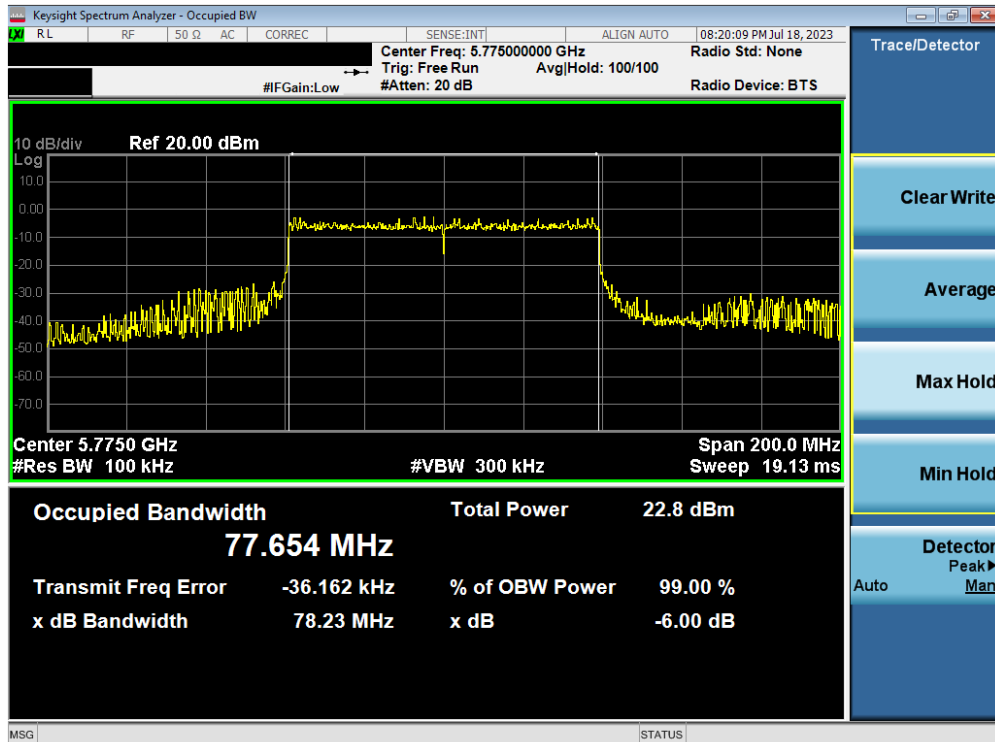


Plot 7-68. 6dB Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax – 996 Tones (UNII Band 3) – Ch. 155)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 56 of 154

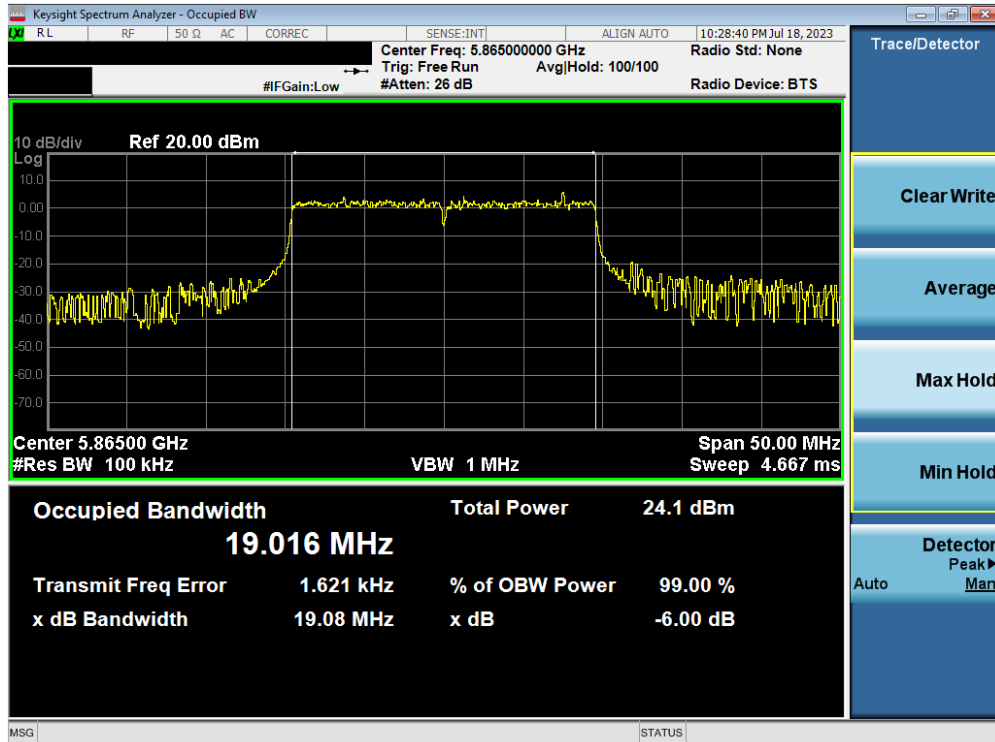


Plot 7-69. 6dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 4) – Ch. 173)

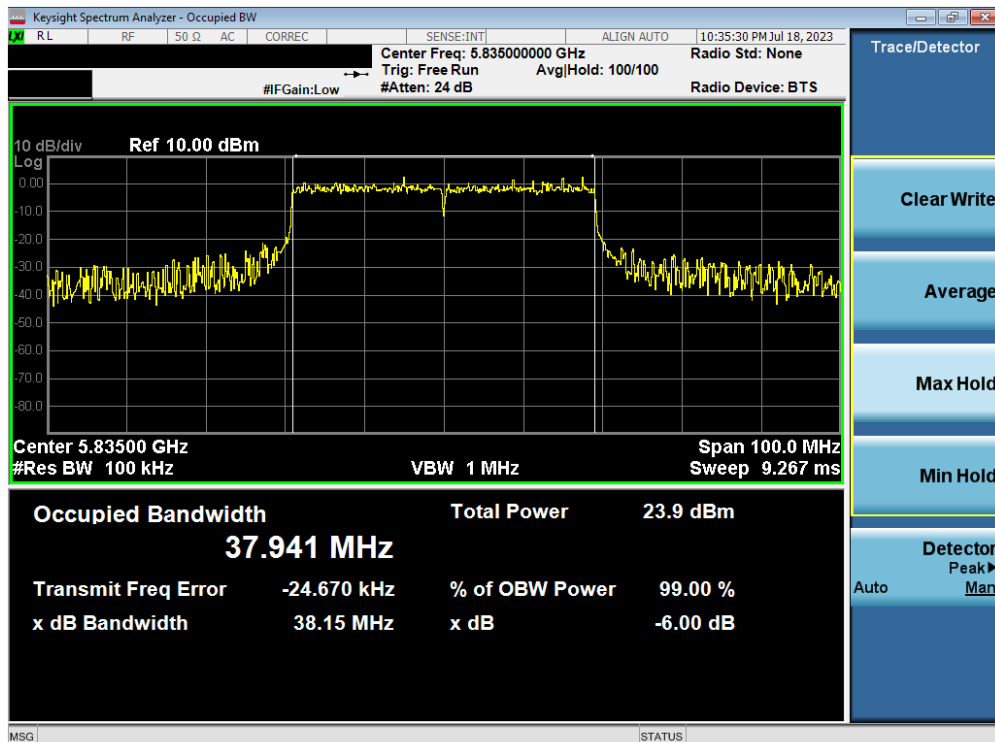


Plot 7-70. 6dB Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 3/4) – Ch. 167)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 57 of 154

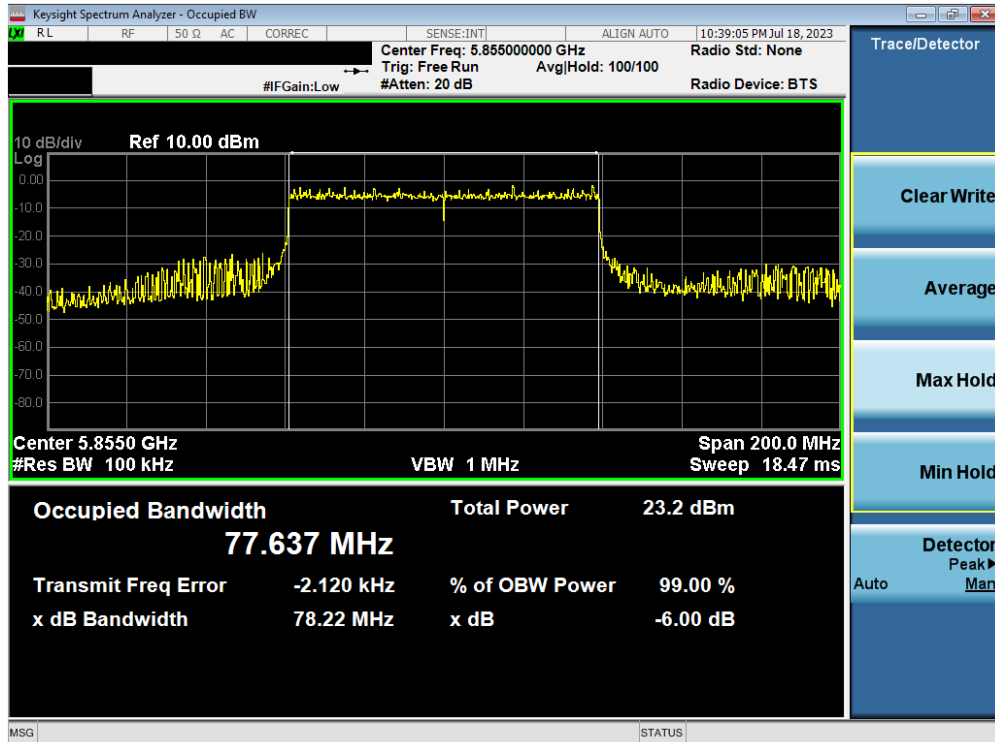

Plot 7-71. 6dB Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax – 996 Tones (UNII Band 3/4) – Ch. 171)

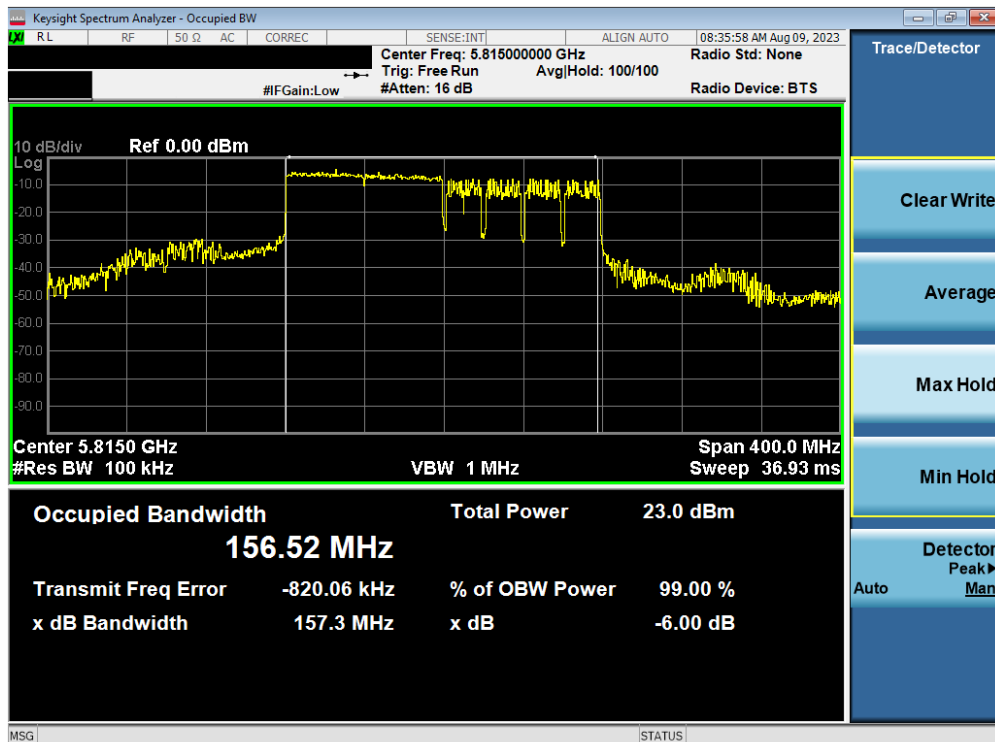

Plot 7-72. 6dB Bandwidth Plot MIMO ANT2 (160MHz BW 802.11ax – 996 Tones (UNII Band 3/4) – Ch. 163)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 58 of 154

7.4 UNII Output Power Measurement

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies.

The output power limits are specified in the tables below.

UNII Band	Frequency Range	Maximum Conducted Power Limit	Maximum e.i.r.p
		FCC	FCC
UNII 1	5.15 – 5.25GHz	23.98dBm (250mW)	N/A
UNII 2A	5.25 – 5.35GHz	The lesser of 23.98dBm (250mW) or 11dBm + 10log ₁₀ B	N/A
UNII 2C	5.47 – 5.725GHz		
UNII 3	5.725 – 5.850GHz	30dBm (1W)	N/A
UNII 4	5.850 – 5.895GHz	N/A	30dBm (1W)

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G
ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 59 of 154

MIMO Conducted Output Power Measurements (26 Tones)

Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)									Conducted Power Limit	Conducted Power Margin	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. margin		
				RU Index: 0			RU Index: 4			RU Index: 8										
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO								
20MHz BW	1	36	26T	5180	9.60	9.71	12.67	9.81	9.69	12.76	9.77	9.73	12.76	23.98	-11.22	-0.46	12.30	30.0	-17.70	
				5200	9.51	9.68	12.61	9.69	9.65	12.68	9.69	9.63	12.67	23.98	-11.30	-0.46	12.22	30.0	-17.78	
				5240	9.17	9.80	12.51	9.19	9.78	12.51	9.41	9.66	12.55	23.98	-11.43	-0.46	12.09	30.0	-17.91	
	2A	52	26T	5260	9.99	9.76	12.89	9.61	9.40	12.52	9.99	9.66	12.84	23.65	-10.76	-0.82	12.07	30.0	-17.93	
				5280	9.93	9.67	12.81	9.56	9.42	12.50	9.99	9.48	12.75	23.65	-10.84	-0.82	11.99	30.0	-18.01	
				5320	9.89	9.99	12.95	9.44	9.56	12.51	9.95	9.94	12.96	23.65	-10.69	-0.82	12.14	30.0	-17.86	
	2C	100	26T	5500	9.89	9.20	12.57	9.86	9.36	12.63	9.91	9.04	12.51	23.65	-11.02	0.10	12.73	30.0	-17.27	
				5600	9.44	9.86	12.67	9.43	9.90	12.68	9.36	9.94	12.67	23.65	-10.97	0.10	12.78	30.0	-17.22	
				5720	9.32	9.66	12.50	9.78	9.71	12.76	9.39	9.99	12.71	23.65	-10.89	0.10	12.86	30.0	-17.14	
	3	149	26T	5745	12.99	12.97	15.70	11.93	12.61	15.29	12.24	12.97	15.63	30.00	-14.30	0.26	15.96	36.0	-20.04	
				5785	11.53	12.71	15.17	11.92	12.71	15.34	11.28	12.69	15.05	30.00	-14.66	0.26	15.60	36.0	-20.40	
				5825	11.59	12.97	15.34	11.03	12.79	15.01	11.35	12.97	15.25	30.00	-14.66	0.26	15.60	36.0	-20.40	
	4	169	26T	5845	11.38	12.89	15.21	11.46	12.88	15.24	11.16	12.87	15.11	-	-	0.57	15.81	30.0	-14.19	
				5865	11.47	12.89	15.25	11.64	12.87	15.31	11.25	12.86	15.14	-	-	0.57	15.88	30.0	-14.12	
				5885	11.08	12.86	15.07	11.33	12.89	15.19	10.89	12.88	15.01	-	-	0.57	15.76	30.0	-14.24	
	40MHz BW	1	38	26T	5190	9.89	9.92	12.92	9.86	9.71	12.80	9.68	9.49	12.60	23.98	-11.06	-0.46	12.45	30.0	-17.55
5230					9.60	9.78	12.70	9.20	9.93	12.59	9.09	10.01	12.58	23.98	-11.28	-0.46	12.24	30.0	-17.76	
5270					9.98	9.78	12.89	9.66	9.40	12.54	9.99	9.31	12.67	23.65	-10.76	-0.82	12.07	30.0	-17.93	
2A		62	26T	5310	9.71	10.00	12.87	9.56	9.68	12.63	9.84	9.71	12.79	23.65	-10.78	-0.82	12.05	30.0	-17.95	
				5510	10.01	9.20	12.63	9.98	9.01	12.53	9.94	8.99	12.50	23.65	-11.02	0.10	12.73	30.0	-17.27	
				5590	9.39	9.65	12.53	9.58	9.98	12.79	9.21	9.77	12.51	23.65	-10.86	0.10	12.89	30.0	-17.11	
2C		142	26T	5710	9.51	10.00	12.77	9.16	9.82	12.51	9.18	10.01	12.63	23.65	-10.88	0.10	12.87	30.0	-17.13	
				5755	11.56	12.48	15.05	12.04	12.76	15.43	12.03	12.89	15.49	30.00	-14.51	0.26	15.75	36.0	-20.25	
				5795	11.63	12.79	15.26	12.01	12.53	15.29	11.16	12.72	15.02	30.00	-14.71	0.26	15.55	36.0	-20.45	
4		167	26T	5835	11.48	12.88	15.25	11.69	12.70	15.23	10.97	12.89	15.05	-	-	0.57	15.82	30.0	-14.18	
				5875	11.47	12.89	15.25	11.42	12.66	15.09	11.02	12.85	15.04	-	-	0.57	15.81	30.0	-14.19	
				5885	11.08	12.86	15.07	11.33	12.89	15.19	10.89	12.88	15.01	-	-	0.57	15.76	30.0	-14.24	
80MHz BW		1	42	26T	5210	9.21	9.79	12.52	9.42	9.89	12.67	9.45	9.55	12.51	23.98	-11.31	-0.46	12.21	30.0	-17.79
					5290	9.85	9.78	12.83	9.84	9.25	12.57	9.87	9.12	12.52	23.65	-10.82	-0.82	12.00	30.0	-18.00
					5530	10.00	9.33	12.69	10.01	9.13	12.60	9.36	9.78	12.59	23.65	-10.96	0.10	12.79	30.0	-17.21
		2C	122	26T	5610	9.65	9.74	12.71	9.44	9.67	12.57	9.04	10.01	12.56	23.65	-10.94	0.10	12.81	30.0	-17.19
	5690				9.54	9.50	12.53	9.41	9.88	12.66	9.28	9.99	12.66	23.65	-10.99	0.10	12.76	30.0	-17.24	
	5775				11.79	12.60	15.22	12.02	12.79	15.43	11.74	12.88	15.36	30.00	-14.57	0.26	15.69	36.0	-20.31	
	4	171	26T	5855	11.77	12.88	15.37	11.24	12.79	15.09	11.36	12.89	15.20	-	-	0.57	15.94	30.0	-14.06	
				5885	11.08	12.86	15.07	11.33	12.89	15.19	10.89	12.88	15.01	-	-	0.57	15.76	30.0	-14.24	
				5885	11.08	12.86	15.07	11.33	12.89	15.19	10.89	12.88	15.01	-	-	0.57	15.76	30.0	-14.24	
	160MHz BW	50	26T	Average Conducted Power (dBm)									Conducted Power Limit	Conducted Power Margin	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. margin		
				RU Index: 0 (L)			RU Index: 36 (L)			RU Index: 36 (U)										
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO								
5250				9.21	9.79	12.52	9.34	9.94	12.66	9.79	9.37	12.60							23.98	-11.32
5570	9.74	9.34	12.55	9.70	9.56	12.64	9.21	9.99	12.63	23.65	-11.01	0.10	12.74	30.0	-17.26					
5815	11.83	12.30	15.08	12.00	12.57	15.30	11.17	12.88	15.12	-	-	0.57	15.87	30.0	-14.13					

Table 7-14. MIMO (UNII) Maximum Conducted Output Power (26 Tones)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 60 of 154

MIMO Conducted Output Power Measurements (52 Tones)

Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)									Conducted Power Limit	Conducted Power Margin	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. margin		
				RU Index: 37			RU Index: 39			RU Index: 40										
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO								
20MHz BW	1	36	52T	5180	14.45	14.64	17.56	14.80	14.88	17.85	14.58	14.65	17.63	23.98	-6.13	-0.46	17.39	30.0	-12.61	
				5200	14.33	14.59	17.47	14.71	14.81	17.77	14.49	14.58	17.55	23.98	-6.21	-0.46	17.31	30.0	-12.69	
				5240	13.91	14.65	17.31	14.29	14.92	17.63	14.54	14.98	17.78	23.98	-6.20	-0.46	17.32	30.0	-12.68	
	2A	52	52T	5260	14.95	14.80	17.89	14.81	14.46	17.65	14.99	14.68	17.85	23.65	-5.76	-0.82	17.07	30.0	-12.93	
				5280	14.94	14.69	17.83	14.74	14.35	17.56	14.98	14.55	17.78	23.65	-5.82	-0.82	17.01	30.0	-12.99	
				5320	14.50	14.57	17.55	14.84	14.61	17.74	14.99	14.84	17.93	23.65	-5.72	-0.82	17.11	30.0	-12.89	
	2C	100	52T	5500	14.67	13.23	17.02	14.99	13.67	17.39	14.64	13.45	17.10	23.65	-6.26	0.10	17.49	30.0	-12.51	
				5600	14.43	14.70	17.58	14.13	14.55	17.36	14.29	14.80	17.56	23.65	-6.07	0.10	17.68	30.0	-12.32	
				5720	14.06	14.60	17.35	14.19	14.77	17.50	14.39	14.97	17.70	23.65	-5.95	0.10	17.80	30.0	-12.20	
	3	149	52T	5745	14.45	14.98	17.73	14.09	14.76	17.45	14.26	14.98	17.65	30.00	-12.27	0.26	17.99	36.0	-18.01	
				5785	13.78	14.67	17.26	13.91	14.92	17.45	14.06	14.98	17.55	30.00	-12.45	0.26	17.81	36.0	-18.19	
				5825	13.67	14.97	17.38	13.70	14.74	17.26	13.42	14.97	17.27	30.00	-12.62	0.26	17.64	36.0	-18.36	
	4	169	52T	5845	13.58	14.94	17.32	13.16	14.71	17.01	13.35	14.92	17.22	-	-	0.57	17.89	30.0	-12.11	
				5865	13.67	14.92	17.35	13.28	14.68	17.05	13.47	14.89	17.25	-	-	0.57	17.92	30.0	-12.08	
				5885	13.38	14.89	17.21	13.40	14.98	17.27	13.57	14.98	17.34	-	-	0.57	17.91	30.0	-12.09	
	40MHz BW	1	38	52T	5190	14.41	14.68	17.56	14.34	14.49	17.43	14.71	14.69	17.71	23.98	-6.27	-0.46	17.25	30.0	-12.75
5230					13.26	14.84	17.13	13.72	14.98	17.41	14.07	14.99	17.56	23.98	-6.42	-0.46	17.10	30.0	-12.90	
5270					14.98	14.94	17.97	14.85	14.51	17.69	14.63	13.96	17.32	23.65	-5.68	-0.82	17.15	30.0	-12.85	
2A		62	52T	5310	14.61	14.76	17.70	14.95	14.77	17.87	14.67	14.42	17.56	23.65	-5.78	-0.82	17.05	30.0	-12.95	
				5510	14.73	13.23	17.05	14.98	13.72	17.41	14.70	13.65	17.22	23.65	-6.24	0.10	17.51	30.0	-12.49	
				5590	14.61	14.69	17.66	14.32	14.56	17.45	14.41	14.89	17.67	23.65	-5.98	0.10	17.77	30.0	-12.23	
2C		142	52T	5710	14.32	14.67	17.51	14.42	14.86	17.66	14.40	14.99	17.72	23.65	-5.93	0.10	17.82	30.0	-12.18	
				5755	14.29	14.84	17.58	13.92	14.59	17.28	13.91	14.78	17.38	30.00	-12.42	0.26	17.84	36.0	-18.16	
				5795	14.17	14.92	17.57	13.75	14.66	17.24	13.71	14.87	17.34	30.00	-12.43	0.26	17.83	36.0	-18.17	
4		167	52T	5835	13.87	14.99	17.48	13.43	14.81	17.18	13.38	14.98	17.26	-	-	0.57	18.05	30.0	-11.95	
				5875	13.69	14.99	17.40	13.27	14.77	17.09	13.22	14.95	17.18	-	-	0.57	17.96	30.0	-12.04	
				5885	13.55	14.77	17.21	13.44	14.87	17.22	13.06	14.99	17.14	-	-	0.57	17.79	30.0	-12.21	
80MHz BW		1	42	52T	5210	13.32	14.93	17.21	13.38	14.71	17.11	13.93	14.71	17.35	23.98	-6.63	-0.46	16.88	30.0	-13.12
					5290	14.97	14.94	17.97	14.94	14.48	17.73	14.71	13.71	17.25	23.65	-5.68	-0.82	17.14	30.0	-12.86
					5530	14.99	13.46	17.30	14.75	13.63	17.24	14.80	14.16	17.50	23.65	-6.15	0.10	17.60	30.0	-12.40
		2A	122	52T	5610	14.78	14.74	17.77	14.35	14.67	17.52	14.17	14.99	17.61	23.65	-5.88	0.10	17.87	30.0	-12.13
	5690				14.19	14.80	17.52	14.44	14.93	17.70	14.26	14.97	17.64	23.65	-5.95	0.10	17.80	30.0	-12.20	
	5775				14.39	14.88	17.65	13.75	14.62	17.22	13.44	14.80	17.18	30.00	-12.35	0.26	17.91	36.0	-18.09	
	4	171	52T	5855	13.55	14.77	17.21	13.44	14.87	17.22	13.06	14.99	17.14	-	-	0.57	17.79	30.0	-12.21	
				5885	13.55	14.77	17.21	13.44	14.87	17.22	13.06	14.99	17.14	-	-	0.57	17.79	30.0	-12.21	
				5885	13.55	14.77	17.21	13.44	14.87	17.22	13.06	14.99	17.14	-	-	0.57	17.79	30.0	-12.21	
	160MHz BW	50	52T	Average Conducted Power (dBm)									Conducted Power Limit	Conducted Power Margin	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. margin		
				RU Index: 37 (L)			RU Index: 52 (L)			RU Index: 52 (U)										
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO								
				13.49	14.79	17.20	14.51	14.99	17.77	14.94	14.41	17.69							23.98	-6.21
	2C	114	52T	14.98	13.96	17.51	14.66	14.54	17.61	14.14	14.97	17.59	23.65	-6.04	0.10	17.71	30.0	-12.29		
	4	163	52T	14.79	14.91	17.86	13.71	14.67	17.23	13.39	14.98	17.27	-	-	0.57	18.43	30.0	-11.57		

Table 7-15. MIMO (UNII) Maximum Conducted Output Power (52 Tones)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 61 of 154

MIMO Conducted Output Power Measurements (106 Tones)

Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)									Conducted Power Limit	Conducted Power Margin	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. margin		
				RU Index: 53			RU Index: 54			N/A										
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO								
20MHz BW	1	36	106T	5180	15.46	15.67	18.58	15.56	15.68	18.63				23.98	-5.35	-0.46	18.17	30.0	-11.83	
				5200	15.44	15.67	18.57	15.57	15.65	18.62				23.98	-5.36	-0.46	18.16	30.0	-11.84	
				5240	15.01	15.54	18.29	15.07	15.49	18.30				23.98	-5.68	-0.46	17.84	30.0	-12.16	
	2A	52	106T	5280	15.49	15.29	18.40	15.54	15.19	18.38				23.65	-5.25	-0.82	17.58	30.0	-12.42	
				5280	15.46	15.19	18.34	15.48	15.06	18.29				23.65	-5.31	-0.82	17.52	30.0	-12.48	
				5320	15.59	15.29	18.45	15.61	15.20	18.42				23.65	-5.20	-0.82	17.63	30.0	-12.37	
	2C	100	106T	5500	15.83	14.23	18.11	15.83	14.38	18.18				23.65	-5.47	0.10	18.28	30.0	-11.72	
				5600	15.38	15.84	18.63	15.31	15.91	18.63				23.65	-5.02	0.10	18.73	30.0	-11.27	
				5720	15.02	15.62	18.34	14.90	15.61	18.28				23.65	-5.31	0.10	18.44	30.0	-11.56	
	3	149	106T	5745	14.93	15.55	18.26	14.76	15.55	18.18				30.00	-11.74	0.26	18.52	36.0	-17.48	
				5785	14.70	15.70	18.24	14.56	15.70	18.18				30.00	-11.76	0.26	18.50	36.0	-17.50	
				5825	14.85	15.95	18.45	14.67	15.95	18.37				30.00	-11.55	0.26	18.71	36.0	-17.29	
	4	169	106T	5845	14.77	15.93	18.40	14.64	15.91	18.33				-	-	0.57	18.97	30.0	-11.03	
				5865	14.70	15.90	18.35	14.56	15.89	18.29				-	-	0.57	18.92	30.0	-11.08	
				5885	14.21	15.75	18.06	14.11	15.74	18.01				-	-	0.57	18.62	30.0	-11.38	
	40MHz BW	1	38	106T	5190	15.42	15.62	18.53	15.36	15.48	18.43	15.68	15.67	18.69	23.98	-5.29	-0.46	18.22	30.0	-11.78
5230					14.49	15.92	18.27	14.41	15.71	18.12	14.69	15.75	18.26	23.98	-5.71	-0.46	17.81	30.0	-12.19	
5270					15.99	15.81	18.91	15.97	15.57	18.78	15.64	15.11	18.39	23.65	-4.74	-0.82	18.09	30.0	-11.91	
2A		54	106T	5310	15.68	15.45	18.58	15.54	15.21	18.39	15.73	15.18	18.47	23.65	-5.07	-0.82	17.76	30.0	-12.24	
				5510	15.93	14.21	18.16	15.78	14.19	18.07	15.89	14.55	18.28	23.65	-5.37	0.10	18.38	30.0	-11.62	
				5590	15.54	15.81	18.69	15.34	15.70	18.53	15.36	15.94	18.67	23.65	-4.96	0.10	18.79	30.0	-11.21	
2C		142	106T	5710	15.23	15.67	18.47	14.95	15.53	18.26	14.90	15.67	18.31	23.65	-5.18	0.10	18.57	30.0	-11.43	
				5755	15.04	15.81	18.45	14.78	15.62	18.23	14.68	15.77	18.27	30.00	-11.55	0.26	18.71	36.0	-17.29	
				5795	15.17	15.99	18.61	14.88	15.86	18.41	14.75	15.99	18.42	30.00	-11.39	0.26	18.87	36.0	-17.13	
4		167	106T	5835	15.04	15.99	18.55	14.76	15.87	18.36	14.61	15.98	18.36	-	-	0.57	19.12	30.0	-10.88	
				5875	14.77	15.99	18.43	14.47	15.85	18.22	14.34	15.95	18.23	-	-	0.57	19.00	30.0	-11.00	
80MHz BW		1	42	106T	5210	14.44	15.98	18.29	14.53	15.82	18.23	15.02	15.81	18.44	23.98	-5.54	-0.46	17.98	30.0	-12.02
					5290	15.99	15.92	18.97	15.99	15.51	18.77	15.71	14.81	18.29	23.65	-4.68	-0.82	18.14	30.0	-11.86
					5330	15.89	14.35	18.20	15.63	14.48	18.10	15.69	15.02	18.38	23.65	-5.27	0.10	18.48	30.0	-11.52
		2A	106	106T	5510	15.68	15.79	18.75	15.30	15.73	18.53	14.65	15.71	18.22	23.65	-4.90	0.10	18.85	30.0	-11.15
	5690				15.57	15.55	18.57	15.75	15.98	18.88	15.49	15.99	18.76	23.65	-4.77	0.10	18.98	30.0	-11.02	
	5775				15.26	15.84	18.57	14.69	15.63	18.20	14.35	15.79	18.14	30.00	-11.43	0.26	18.83	36.0	-17.17	
	4	171	106T	5855	14.72	15.56	18.17	14.67	15.81	18.29	14.27	15.94	18.20	-	-	0.57	18.86	30.0	-11.14	
	160MHz BW	50	106T	Average Conducted Power (dBm)									Conducted Power Limit	Conducted Power Margin	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. margin		
				RU Index: 53 (L)			RU Index: 60 (L)			RU Index: 60 (U)										
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO								
				15.07	15.99	18.56	15.45	15.81	18.64	15.93	15.22	18.60							23.98	-5.34
	5570	15.99	15.02	18.54	15.67	15.54	18.62	15.60	15.63	18.63	23.65	-5.02	0.10	18.73	30.0	-11.27				
	5815	15.78	15.99	18.90	14.73	15.74	18.27	13.87	15.89	18.01	-	-	0.57	19.47	30.0	-10.53				

Table 7-16. MIMO (UNII) Maximum Conducted Output Power (106 Tones)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 62 of 154

MIMO Conducted Output Power Measurements (242 Tones)

Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)									Conducted Power Limit	Conducted Power Margin	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. margin		
				RU Index: 61			N/A			N/A										
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO								
20MHz BW	1	36	242T	5180	15.52	15.72	18.63						23.98	-5.35	-0.46	18.17	30.0	-11.83		
				5200	15.40	15.61	18.52						23.98	-5.46	-0.46	18.05	30.0	-11.95		
				5240	15.56	15.98	18.79						23.98	-5.19	-0.46	18.33	30.0	-11.67		
	2A	52	242T	5260	15.98	15.80	18.90						23.65	-4.75	-0.82	18.08	30.0	-11.92		
				5280	15.99	15.69	18.85						23.65	-4.80	-0.82	18.03	30.0	-11.97		
				5320	15.62	15.28	18.46						23.65	-5.19	-0.82	17.64	30.0	-12.36		
	2C	100	242T	5500	15.85	14.32	18.16						23.65	-5.49	0.10	18.26	30.0	-11.74		
				5600	15.21	15.50	18.37						23.65	-5.28	0.10	18.47	30.0	-11.53		
				5720	14.95	15.61	18.30						23.65	-5.35	0.10	18.40	30.0	-11.60		
	3	149	242T	5745	14.82	15.56	18.22						30.00	-11.78	0.26	18.48	36.0	-17.52		
				5785	14.65	15.70	18.22						30.00	-11.78	0.26	18.48	36.0	-17.52		
				5825	14.77	15.94	18.40						30.00	-11.60	0.26	18.66	36.0	-17.34		
4	169	242T	5845	14.72	15.95	18.39						-	-	0.57	18.96	30.0	-11.04			
			5865	14.63	15.95	18.35						-	-	0.57	18.92	30.0	-11.08			
			5885	14.16	15.78	18.06						-	-	0.57	18.62	30.0	-11.38			
40MHz BW	1	38	242T	5190	15.34	15.61	18.49	15.51	15.59	18.56				23.98	-5.42	-0.46	18.10	30.0	-11.90	
				5230	14.38	15.85	18.19	14.53	15.71	18.17				23.98	-5.79	-0.46	17.73	30.0	-12.27	
				5270	15.96	15.73	18.86	15.99	15.53	18.78				23.65	-4.79	-0.82	18.04	30.0	-11.96	
	2A	54	242T	5310	15.55	15.31	18.44	15.58	15.12	18.37				23.65	-5.21	-0.82	17.62	30.0	-12.38	
				5510	15.80	14.24	18.10	15.78	14.48	18.19				23.65	-5.46	0.10	18.29	30.0	-11.71	
				5590	15.38	15.81	18.61	15.27	15.91	18.61				23.65	-5.04	0.10	18.71	30.0	-11.29	
	2C	118	242T	5710	15.08	15.58	18.35	14.86	15.64	18.28				23.65	-5.30	0.10	18.45	30.0	-11.55	
				5755	14.87	15.77	18.35	14.63	15.73	18.23				30.00	-11.65	0.26	18.61	36.0	-17.39	
				5795	14.97	15.99	18.52	14.71	15.95	18.38				30.00	-11.48	0.26	18.78	36.0	-17.22	
	3	151	242T	5835	14.85	15.96	18.45	14.58	15.92	18.31				-	-	0.57	19.02	30.0	-10.98	
				5875	14.57	15.91	18.30	14.29	15.87	18.16				-	-	0.57	18.87	30.0	-11.13	
				5885	14.57	15.91	18.30	14.29	15.87	18.16				-	-	0.57	18.87	30.0	-11.13	
80MHz BW	1	42	242T	5210	13.21	14.89	17.14	13.33	14.77	17.12	13.77	14.72	17.28	23.98	-6.70	-0.46	16.82	30.0	-13.18	
				5290	14.95	14.88	17.93	14.90	14.60	17.76	14.34	13.97	17.17	23.65	-5.72	-0.82	17.10	30.0	-12.90	
				5530	14.69	13.32	17.07	14.55	13.42	17.03	14.56	13.89	17.25	23.65	-6.40	0.10	17.35	30.0	-12.65	
	2A	106	242T	5610	14.64	14.77	17.72	14.39	14.73	17.57	14.13	14.99	17.59	23.65	-5.93	0.10	17.82	30.0	-12.18	
				5690	14.13	14.68	17.42	13.79	14.60	17.22	13.48	14.71	17.15	23.65	-6.23	0.10	17.52	30.0	-12.48	
				5775	14.17	14.87	17.54	13.81	14.71	17.29	13.37	14.76	17.13	30.00	-12.46	0.26	17.80	36.0	-18.20	
	3	155	242T	5855	13.38	14.70	17.10	13.57	14.93	17.31	13.13	14.99	17.17	-	-	0.57	17.88	30.0	-12.12	
				5865	14.70	17.10	13.57	14.93	17.31	13.13	14.99	17.17	-	-	0.57	17.88	30.0	-12.12		
				5885	14.70	17.10	13.57	14.93	17.31	13.13	14.99	17.17	-	-	0.57	17.88	30.0	-12.12		
	160MHz BW	1	50	242T	5250	12.69	13.90	16.35	12.99	13.48	16.25	13.55	12.95	16.27	23.98	-7.63	-0.46	15.89	30.0	-14.11
					5670	13.76	12.94	16.38	13.39	13.28	16.35	12.93	13.98	16.50	23.65	-7.15	0.10	16.60	30.0	-13.40
					5815	12.88	13.55	16.24	12.48	13.67	16.13	12.39	13.99	16.27	-	-	0.57	16.84	30.0	-13.16
2C		114	242T	5250	12.69	13.90	16.35	12.99	13.48	16.25	13.55	12.95	16.27	23.98	-7.63	-0.46	15.89	30.0	-14.11	
				5670	13.76	12.94	16.38	13.39	13.28	16.35	12.93	13.98	16.50	23.65	-7.15	0.10	16.60	30.0	-13.40	
				5815	12.88	13.55	16.24	12.48	13.67	16.13	12.39	13.99	16.27	-	-	0.57	16.84	30.0	-13.16	
4		163	242T	5250	12.69	13.90	16.35	12.99	13.48	16.25	13.55	12.95	16.27	23.98	-7.63	-0.46	15.89	30.0	-14.11	
				5670	13.76	12.94	16.38	13.39	13.28	16.35	12.93	13.98	16.50	23.65	-7.15	0.10	16.60	30.0	-13.40	
				5815	12.88	13.55	16.24	12.48	13.67	16.13	12.39	13.99	16.27	-	-	0.57	16.84	30.0	-13.16	

Table 7-17. MIMO (UNII) Maximum Conducted Output Power (242 Tones)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 63 of 154

MIMO Conducted Output Power Measurements (484 Tones)

Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)									Conducted Power Limit	Conducted Power Margin	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. margin		
				RU Index: 65			N/A			N/A										
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO								
40MHz BW	1	38	484T	5190	13.54	13.59	16.58						23.98	-7.40	-0.46	16.11	30.0	-13.89		
				5230	14.49	15.83	18.22						23.98	-5.76	-0.46	17.76	30.0	-12.24		
				5270	15.99	15.65	18.83						23.65	-4.82	-0.82	18.01	30.0	-11.99		
	2A	62	484T	5310	13.64	13.22	16.45						23.65	-7.20	-0.82	15.63	30.0	-14.37		
				5510	15.84	14.39	18.19						23.65	-5.46	0.10	18.29	30.0	-11.71		
				5590	15.35	15.89	18.64						23.65	-5.01	0.10	18.74	30.0	-11.26		
	2C	102	484T	5710	15.26	15.54	18.41						23.65	-5.24	0.10	18.51	30.0	-11.49		
				5755	14.78	15.79	18.32						30.00	-11.68	0.26	18.58	36.0	-17.42		
				5795	14.91	15.99	18.49						30.00	-11.51	0.26	18.75	36.0	-17.25		
	4	167	484T	5835	14.76	15.98	18.42						-	-	0.57	18.99	30.0	-11.01		
				5875	14.46	15.92	18.26						-	-	0.57	18.83	30.0	-11.17		
80MHz BW	1	42	484T	5210	13.26	14.82	17.12	13.59	14.69	17.19				23.98	-6.79	-0.46	16.72	30.0	-13.28	
				5290	13.88	13.55	16.73	13.21	13.89	16.57				23.65	-6.92	-0.82	15.91	30.0	-14.09	
				5530	14.76	13.49	17.18	14.67	13.89	17.31				23.65	-6.34	0.10	17.41	30.0	-12.59	
	2C	122	484T	5610	14.47	14.69	17.59	14.16	14.98	17.60				23.65	-6.05	0.10	17.70	30.0	-12.30	
				5690	13.89	14.49	17.21	13.49	14.62	17.10				23.65	-6.44	0.10	17.31	30.0	-12.69	
				5775	13.97	14.72	17.37	13.48	14.69	17.14				30.00	-12.63	0.26	17.63	36.0	-18.37	
	4	5855	171	484T	13.74	14.96	17.40	13.13	14.89	17.11				-	-	0.57	17.97	30.0	-12.03	
	160MHz BW	1	50	484T	Average Conducted Power (dBm)									Conducted Power Limit	Conducted Power Margin	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. margin	
					RU Index: 65			RU Index: 66 (L)			RU Index: 66 (U)									
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO							
		2C	114	484T	5250	12.71	13.81	16.31	12.87	13.53	16.22	13.40	12.94	16.19	23.98	-7.67	-0.46	15.85	30.0	-14.15
					5570	13.67	12.95	16.34	13.49	13.16	16.34	12.95	13.87	16.44	23.65	-7.21	0.10	16.54	30.0	-13.46
5815					13.22	13.93	16.60	12.56	13.67	16.16	12.42	13.99	16.29	-	-	0.57	17.17	30.0	-12.83	

Table 7-18. MIMO (UNII) Maximum Conducted Output Power (484 Tones)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 64 of 154

MIMO Conducted Output Power Measurements (996 Tones)

80MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)						Conducted Power Limit	Conducted Power Margin	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. margin										
					RU Index: 67			N/A																		
					ANT1	ANT2	MIMO	N/A	ANT2	MIMO																
80MHz BW	1	5210	42	996T	13.33	14.65	17.05				23.98	-6.93	-0.46	16.59	30.0	-13.41										
	2A	5290	58	996T	14.85	14.39	17.64				23.65	-6.01	-0.82	16.81	30.0	-13.19										
		5530	106	996T	14.61	13.58	17.14				23.65	-6.51	0.10	17.24	30.0	-12.76										
		5610	122	996T	14.22	14.71	17.48				23.65	-6.17	0.10	17.58	30.0	-12.42										
	2C	5690	138	996T	14.32	14.99	17.68				23.65	-5.97	0.10	17.78	30.0	-12.22										
		5775	155	996T	13.60	14.59	17.13				30.00	-12.87	0.26	17.39	36.0	-18.61										
	4	5855	171	996T	13.33	14.81	17.14				-	-	0.57	17.71	30.0	-12.29										
	160MHz BW	Band	Freq [MHz]	Channel	Tones	Average Conducted Power (dBm)						Conducted Power Limit	Conducted Power Margin	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. margin									
						RU Index: 67 (L)			RU Index: 67 (U)																	
						ANT1	ANT2	MIMO	ANT1	ANT2	MIMO															
1						5250	50	996T	12.88	13.99	16.48							13.94	13.89	16.93	23.98	-7.05	-0.46	16.47	30.0	-13.53
2C						5570	114	996T	13.98	13.41	16.71							13.65	13.99	16.83	23.65	-6.82	0.10	16.93	30.0	-13.07
	5815	163	996T	12.75	13.64	16.23	12.45	13.99	16.30	-	-	0.57	16.87	30.0	-13.13											

Table 7-19. MIMO (UNII) Maximum Conducted Output Power (996 Tones)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 65 of 154



Note:

Per ANSI C63.10-2013 and KDB 662911 v02r01 Section E1), the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

Sample MIMO Calculation:

At 5180MHz in 802.11ax (20MHz BW 242T) mode, the average conducted output power was measured to be 15.52 dBm for Antenna 1 and 15.72 dBm for Antenna 2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(15.52 \text{ dBm} + 15.72 \text{ dBm}) = (35.65 \text{ mW} + 37.33 \text{ mW}) = 72.98 \text{ mW} = 18.63 \text{ dBm}$$

Sample e.i.r.p. Calculation:

At 5180MHz in 802.11ax (20MHz BW 242T) mode, the average MIMO conducted power was calculated to be 18.63 dBm with directional gain of -0.46 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$18.63 \text{ dBm} + -0.46 \text{ dBi} = 18.17 \text{ dBm}$$

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 66 of 154

7.5 Maximum Power Spectral Density

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013, was used to measure the power spectral density.

The output power density limits are as specified in the tables below.

UNII Band	Frequency Range	Maximum Conducted Power Limit
		FCC
UNII 1	5.15 – 5.25GHz	11dBm/MHz
UNII 2A	5.25 – 5.35GHz	
UNII 2C	5.47 – 5.725GHz	
UNII 3	5.725 – 5.850GHz	30dBm/500kHz
UNII 4	5.850 – 5.895GHz	14dBm/MHz e.i.r.p

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.2.2 (Method SA-1)

ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times$ (span/RBW)
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes

The power spectral density for each channel was measured with the RU index showing the highest conducted power.

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 67 of 154

Summed MIMO Power Spectral Density Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Antenna-1 Power Density [dBm]	Antenna-2 Power Density [dBm]	Summed MIMO Power Density [dBm]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	26T	MCS0	7.16	7.62	10.41	11.00	-0.59
	5200	40	ax (20MHz)	26T	MCS0	7.56	7.97	10.78	11.00	-0.22
	5240	48	ax (20MHz)	26T	MCS0	7.11	7.93	10.55	11.00	-0.45
	5190	38	ax (40MHz)	26T	MCS0	7.08	7.98	10.57	11.00	-0.43
	5230	46	ax (40MHz)	26T	MCS0	7.47	7.81	10.65	11.00	-0.35
and 1/2A	5210	42	ax (80MHz)	26T	MCS0	6.70	7.92	10.36	11.00	-0.64
Band 2A	5250	50	ax (160MHz)	26T	MCS0	7.33	7.97	10.67	11.00	-0.33
	5260	52	ax (20MHz)	26T	MCS0	7.53	7.74	10.65	11.00	-0.35
	5280	56	ax (20MHz)	26T	MCS0	7.08	7.68	10.40	11.00	-0.60
	5320	64	ax (20MHz)	26T	MCS0	7.23	7.61	10.44	11.00	-0.56
	5270	54	ax (40MHz)	26T	MCS0	7.39	8.20	10.82	11.00	-0.18
Band 2C	5310	62	ax (40MHz)	26T	MCS0	6.96	7.78	10.40	11.00	-0.60
	5290	58	ax (80MHz)	26T	MCS0	7.11	7.89	10.53	11.00	-0.47
	5500	100	ax (20MHz)	26T	MCS0	7.88	7.46	10.68	11.00	-0.32
	5600	120	ax (20MHz)	26T	MCS0	6.30	7.73	10.08	11.00	-0.92
	5720	144	ax (20MHz)	26T	MCS0	7.31	7.83	10.59	11.00	-0.41
	5510	102	ax (40MHz)	26T	MCS0	7.43	7.21	10.33	11.00	-0.67
	5590	118	ax (40MHz)	26T	MCS0	6.74	8.01	10.43	11.00	-0.57
	5710	142	ax (40MHz)	26T	MCS0	7.43	7.13	10.29	11.00	-0.71
5530	106	ax (80MHz)	26T	MCS0	7.13	7.44	10.30	11.00	-0.70	
5610	122	ax (80MHz)	26T	MCS0	6.82	8.23	10.59	11.00	-0.41	
5690	138	ax (80MHz)	26T	MCS0	7.53	7.83	10.69	11.00	-0.31	
5570	114	ax (160MHz)	26T	MCS0	7.16	8.02	10.62	11.00	-0.38	

Table 7-20. Bands 1, 2A, 2C MIMO Conducted Power Spectral Density Measurements MIMO (26 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Antenna-1 Power Density [dBm]	Antenna-2 Power Density [dBm]	Summed MIMO Power Density [dBm]	Max Permissible Power Density	Margin [dB]
Band 3	5745	149	ax (20MHz)	26T	MCS0	10.42	10.77	13.61	30.00	-16.39
	5785	157	ax (20MHz)	26T	MCS0	9.24	9.84	12.56	30.00	-17.44
	5825	165	ax (20MHz)	26T	MCS0	10.51	10.33	13.43	30.00	-16.57
	5755	151	ax (40MHz)	26T	MCS0	8.76	9.45	12.13	30.00	-17.87
	5795	159	ax (40MHz)	26T	MCS0	8.39	9.06	11.75	30.00	-18.25
	5775	155	ax (80MHz)	26T	MCS0	8.68	8.77	11.73	30.00	-18.27

Table 7-21. Band 3 MIMO Conducted Power Spectral Density Measurements MIMO (26 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Antenna-1 Power Density [dBm/MHz]	Antenna-2 Power Density [dBm/MHz]	MIMO Summed Power Density [dBm/MHz]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]	Directional Antenna Gain [dBi]	EIRP Power Density [dBm/MHz]	Max EIRP Power Density [dBm/MHz]	Margin [dB]
Band 3/4	5845	169	ax (20MHz)	26T	MCS0	9.41	9.54	12.48	30.00	-17.52	0.57	13.05	14.00	-0.95
Band 4	5865	173	ax (20MHz)	26T	MCS0	9.75	9.55	12.66			0.57	13.23	14.00	-0.77
	5885	177	ax (20MHz)	26T	MCS0	9.43	10.02	12.74			0.57	13.31	14.00	-0.69
Band 3/4	5835	167	ax (40MHz)	26T	MCS0	9.53	10.11	12.84	30.00	-17.16	0.57	13.41	14.00	-0.59
Band 4	5875	175	ax (40MHz)	26T	MCS0	9.60	10.48	13.07			0.57	13.64	14.00	-0.36
Band 3/4	5855	171	ax (80MHz)	26T	MCS0	9.70	9.47	12.59	30.00	-17.41	0.57	13.16	14.00	-0.84
	5815	163	ax (160MHz)	26T	MCS0	8.21	10.72	12.65	30.00	-17.35	0.57	13.22	14.00	-0.78

Table 7-22. Bands 3/4 MIMO Conducted Power Spectral Density Measurements MIMO (26 Tones)

FCC ID: A3LSMS711B	MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 68 of 154	

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Antenna-1 Power Density [dBm]	Antenna-2 Power Density [dBm]	Summed MIMO Power Density [dBm]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	242T	MCS0	4.93	6.09	8.56	11.00	-2.44
	5200	40	ax (20MHz)	242T	MCS0	5.04	5.94	8.52	11.00	-2.48
	5240	48	ax (20MHz)	242T	MCS0	5.34	5.91	8.64	11.00	-2.36
	5190	38	ax (40MHz)	484T	MCS0	1.20	2.04	4.65	11.00	-6.35
	5230	46	ax (40MHz)	484T	MCS0	0.48	1.22	3.88	11.00	-7.12
	5210	42	ax (80MHz)	996T	MCS0	-3.97	-2.90	-0.39	11.00	-11.39
id 1/2A	5250	50	ax (160MHz)	996T	MCS0	-3.87	-3.89	-0.87	11.00	-11.87
Band 2A	5260	52	ax (20MHz)	242T	MCS0	5.62	5.90	8.77	11.00	-2.23
	5280	56	ax (20MHz)	242T	MCS0	5.48	5.79	8.65	11.00	-2.35
	5320	64	ax (20MHz)	242T	MCS0	5.13	5.61	8.39	11.00	-2.61
	5270	54	ax (40MHz)	484T	MCS0	1.50	1.95	4.74	11.00	-6.26
	5310	62	ax (40MHz)	484T	MCS0	1.32	1.49	4.42	11.00	-6.58
	5290	58	ax (80MHz)	996T	MCS0	-2.76	-2.09	0.60	11.00	-10.40
Band 2C	5500	100	ax (20MHz)	242T	MCS0	5.36	4.33	7.88	11.00	-3.12
	5600	120	ax (20MHz)	242T	MCS0	4.84	5.86	8.39	11.00	-2.61
	5720	144	ax (20MHz)	242T	MCS0	5.43	5.91	8.69	11.00	-2.31
	5510	102	ax (40MHz)	484T	MCS0	1.33	0.49	3.94	11.00	-7.06
	5590	118	ax (40MHz)	484T	MCS0	0.69	1.88	4.34	11.00	-6.66
	5710	142	ax (40MHz)	484T	MCS0	1.12	1.17	4.16	11.00	-6.84
	5530	106	ax (80MHz)	996T	MCS0	-3.07	-2.87	0.04	11.00	-10.96
	5610	122	ax (80MHz)	996T	MCS0	-3.62	-2.13	0.20	11.00	-10.80
	5690	138	ax (80MHz)	996T	MCS0	-3.02	-2.34	0.35	11.00	-10.65
5570	114	ax (160MHz)	996T	MCS0	-3.28	-3.34	-0.30	11.00	-11.30	

Table 7-23. Bands 1, 2A, 2C MIMO Conducted Power Spectral Density Measurements MIMO (Full Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Antenna-1 Power Density [dBm]	Antenna-2 Power Density [dBm]	Summed MIMO Power Density [dBm]	Max Permissible Power Density	Margin [dB]
Band 3	5745	149	ax (20MHz)	242T	MCS0	2.69	2.72	5.72	30.00	-24.28
	5785	157	ax (20MHz)	242T	MCS0	2.38	3.25	5.85	30.00	-24.15
	5825	165	ax (20MHz)	242T	MCS0	2.85	3.24	6.06	30.00	-23.94
	5755	151	ax (40MHz)	484T	MCS0	-1.68	-1.47	1.44	30.00	-28.56
	5795	159	ax (40MHz)	484T	MCS0	-1.66	-0.93	1.73	30.00	-28.27
	5775	155	ax (80MHz)	996T	MCS0	-5.84	-5.51	-2.66	30.00	-32.66


Table 7-24. Band 3 MIMO Conducted Power Spectral Density Measurements MIMO (Full Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Antenna-1 Power Density [dBm/MHz]	Antenna-2 Power Density [dBm/MHz]	MIMO Summed Power Density [dBm/MHz]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]	Directional Antenna Gain [dBi]	EIRP Power Density [dBm/MHz]	Max EIRP Power Density [dBm/MHz]	Margin [dB]
Band 3/4	5845	169	ax (20MHz)	242T	MCS0	5.56	5.79	8.69	30.00	-21.31	0.57	9.25	14.00	-4.75
Band 4	5865	173	ax (20MHz)	242T	MCS0	5.78	5.92	8.86			0.57	9.42	14.00	-4.58
	5885	177	ax (20MHz)	242T	MCS0	5.85	5.90	8.89			0.57	9.45	14.00	-4.55
Band 3/4	5835	167	ax (40MHz)	484T	MCS0	2.13	1.83	4.99	30.00	-25.01	0.57	5.56	14.00	-8.44
Band 4	5875	175	ax (40MHz)	484T	MCS0	1.47	1.68	4.59			0.57	5.15	14.00	-8.85
Band 3/4	5855	171	ax (80MHz)	996T	MCS0	-2.05	-2.66	0.67	30.00	-29.33	0.57	1.23	14.00	-12.77
	5815	163	ax (160MHz)	996T	MCS0	-3.61	-3.73	-0.66	30.00	-30.66	0.57	-0.09	14.00	-14.09


Table 7-25. Bands 3/4 MIMO Conducted Power Spectral Density Measurements MIMO (Full Tones)

FCC ID: A3LSMS711B	MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 69 of 154	

7.5.1 MIMO Antenna-1 Power Spectral Density Measurements

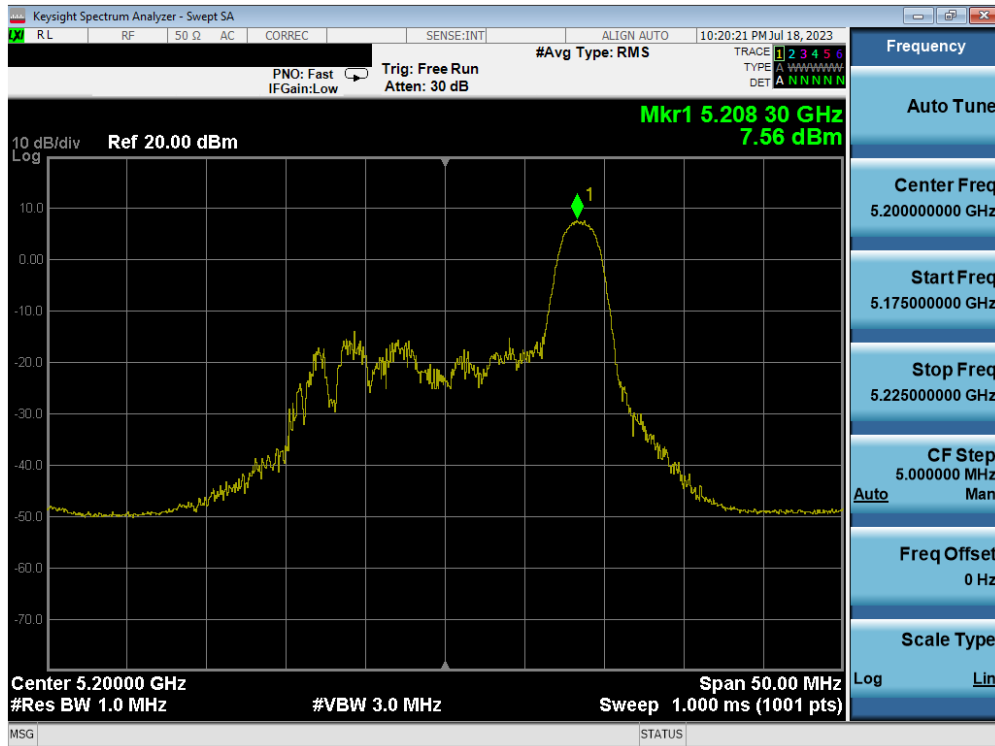


Plot 7-73. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 40)

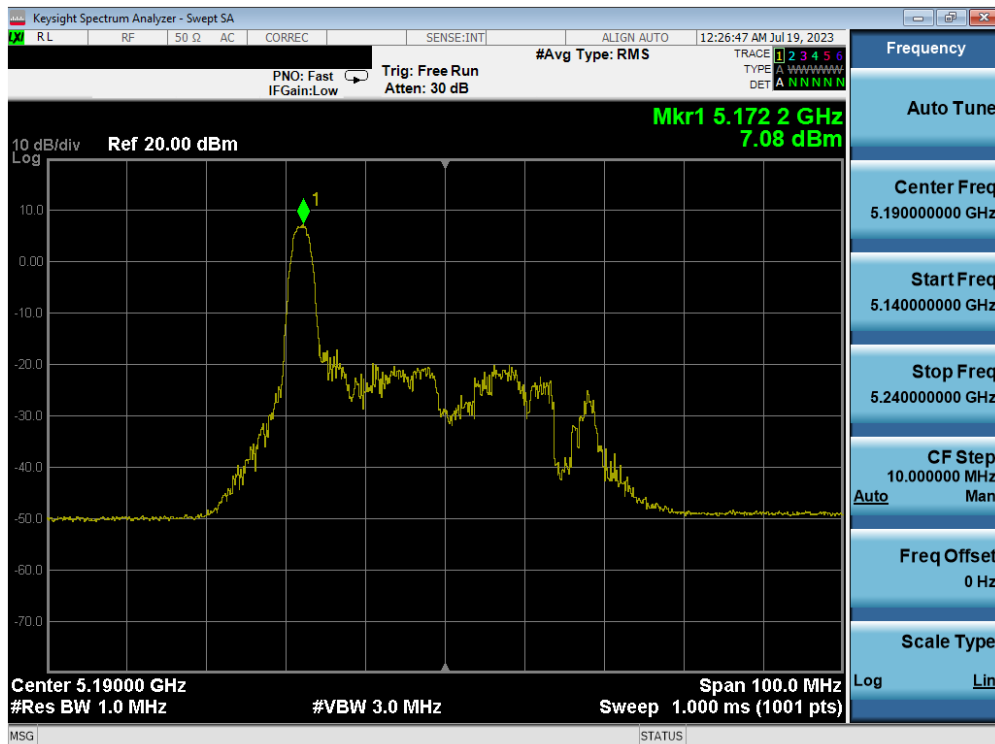


Plot 7-74. Power Spectral Density Plot MIMO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 38)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 70 of 154

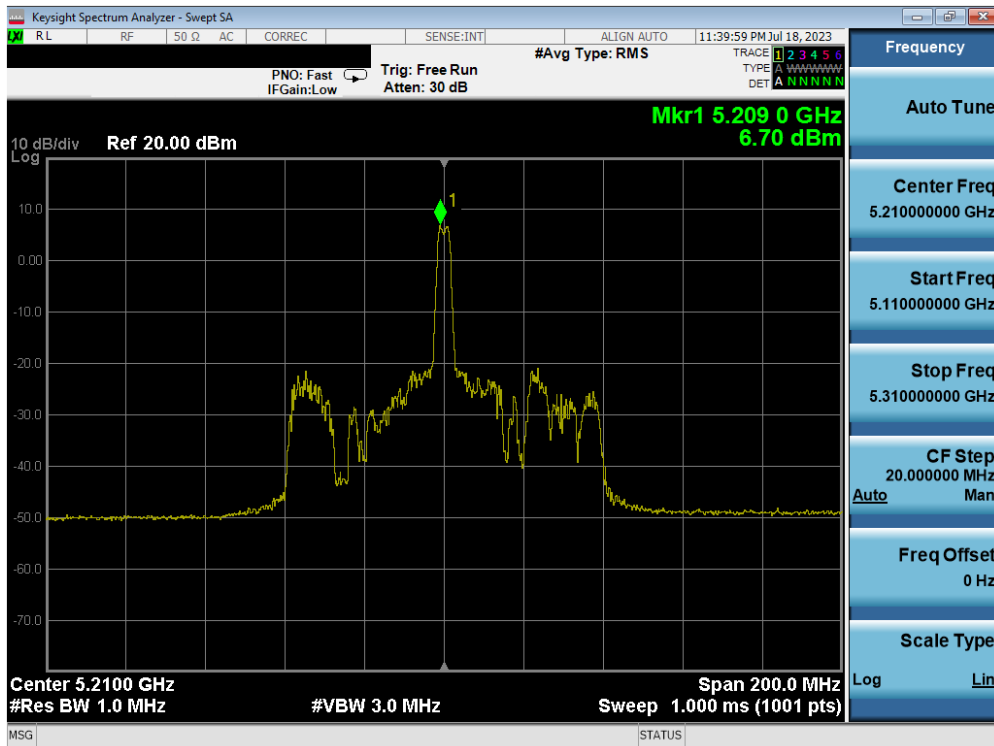


Plot 7-75. Power Spectral Density Plot MIMO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 42)

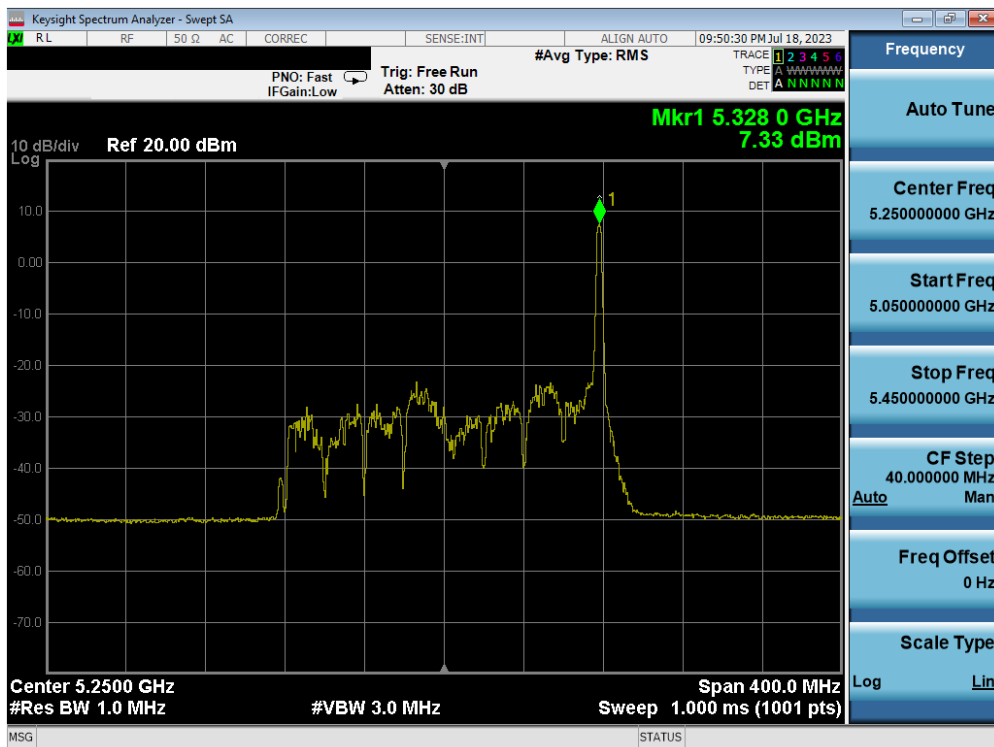


Plot 7-76. Power Spectral Density Plot MIMO ANT1 (160MHz BW 802.11ax – 26 Tones (UNII Band 1/2A) – Ch. 50)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 71 of 154

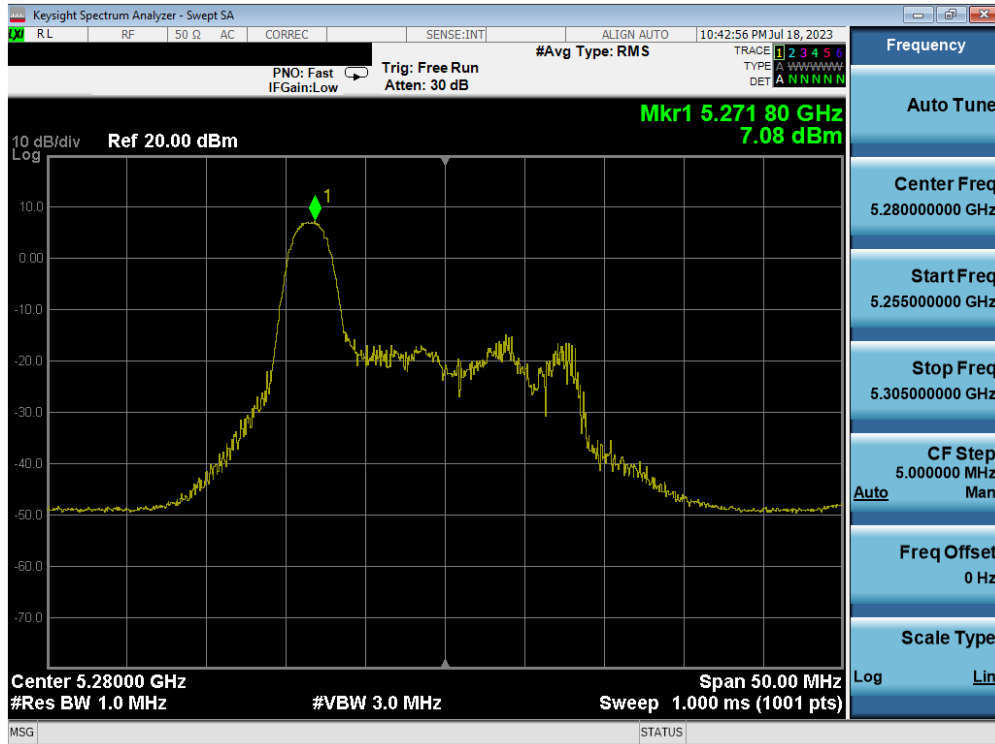


Plot 7-77. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 56)

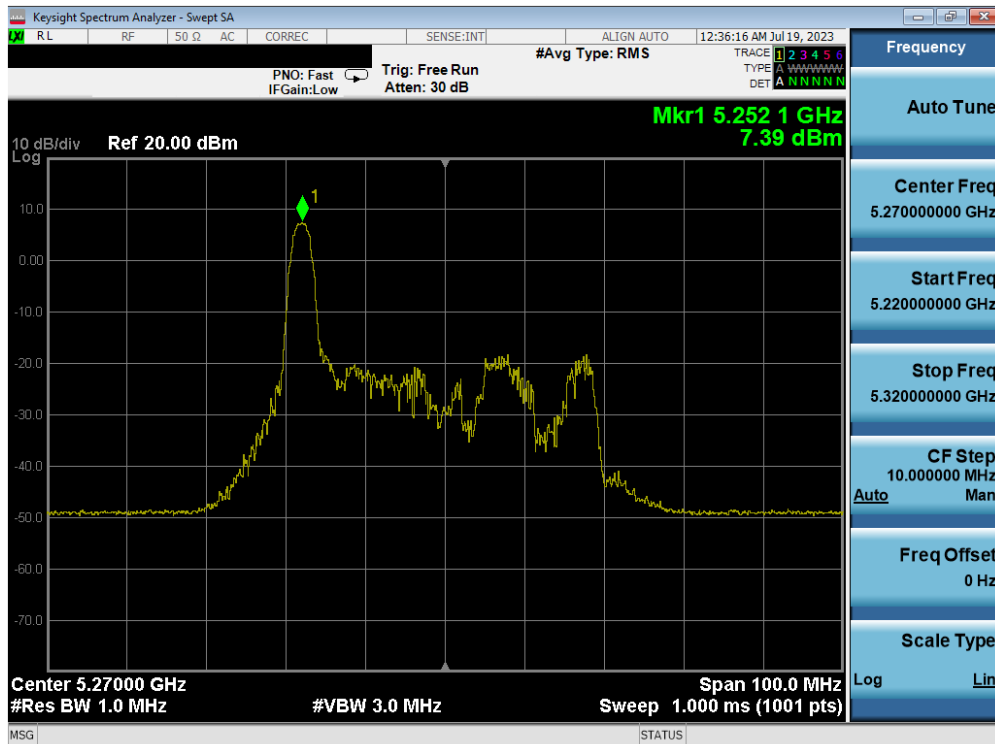


Plot 7-78. Power Spectral Density Plot MIMO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 72 of 154

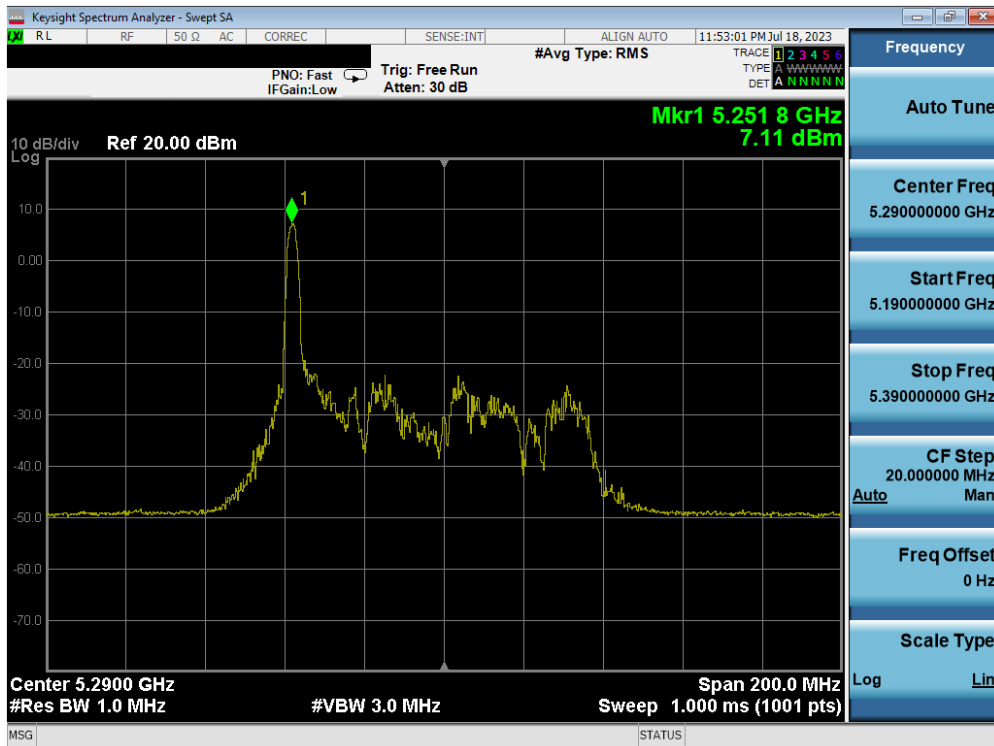

Plot 7-79. Power Spectral Density Plot MIMO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 58)

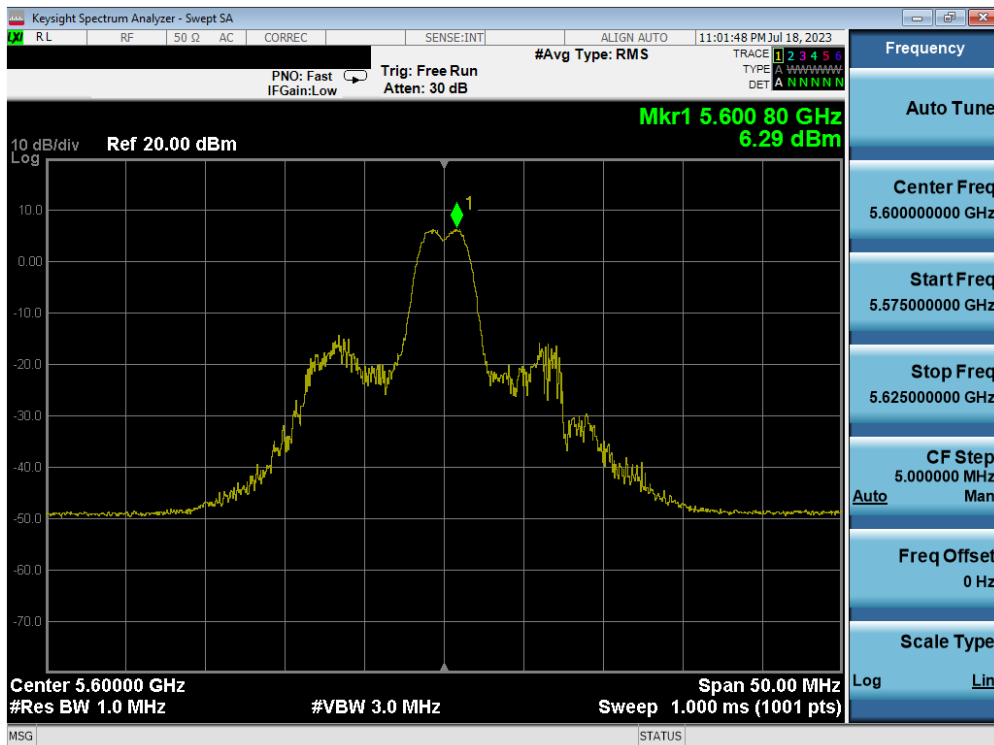


Plot 7-80. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 73 of 154




Plot 7-81. Power Spectral Density Plot MIMO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 118)

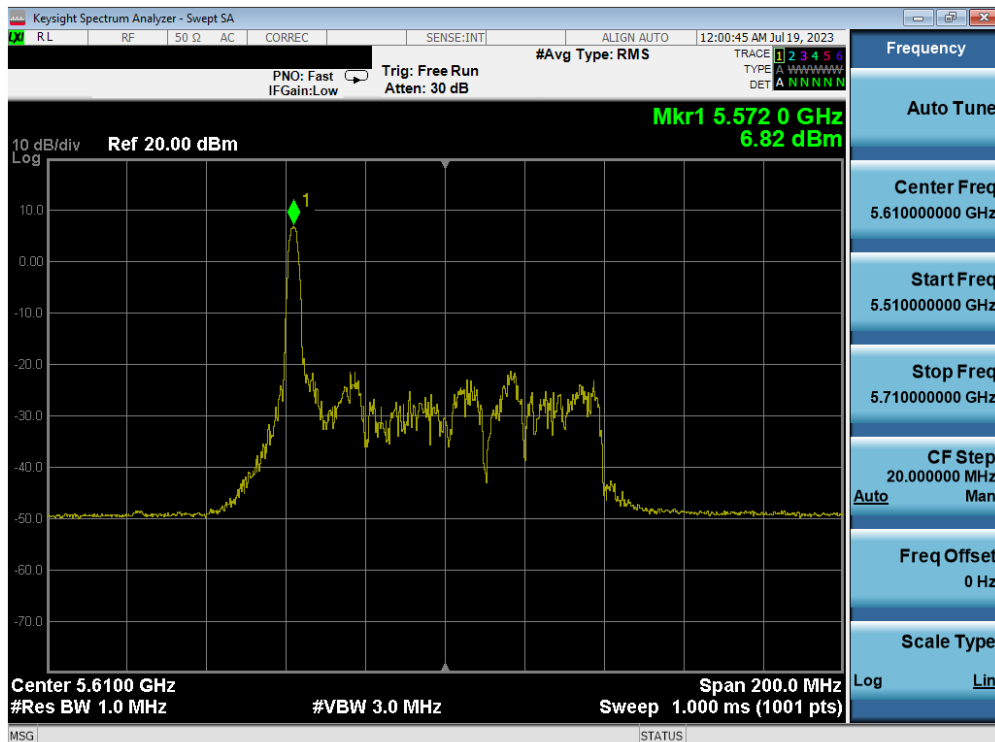


Plot 7-82. Power Spectral Density Plot MIMO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 74 of 154

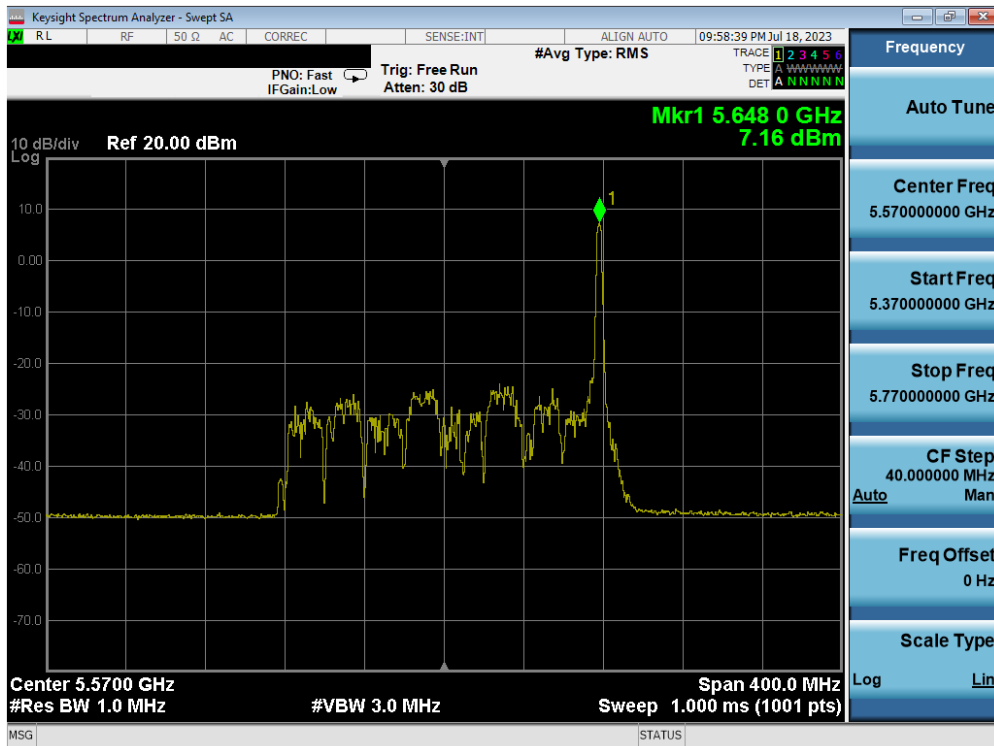


Plot 7-83. Power Spectral Density Plot MIMO ANT1 (160MHz BW 802.11ax – 2 Tones (UNII Band 2C) – Ch. 114)

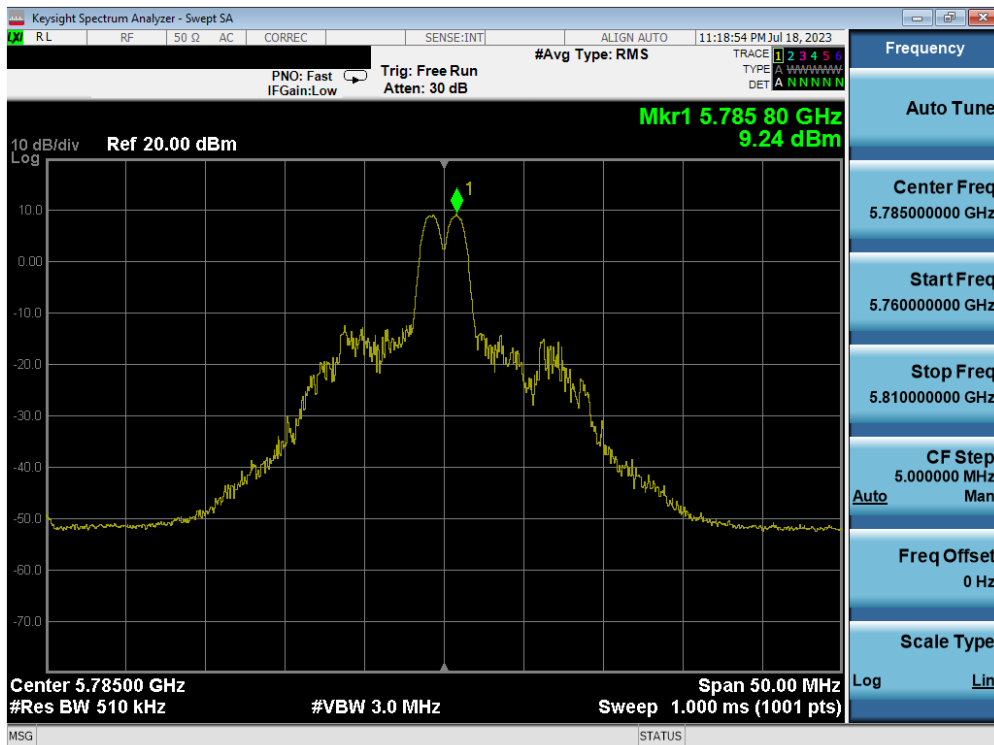


Plot 7-84. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 157)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 75 of 154

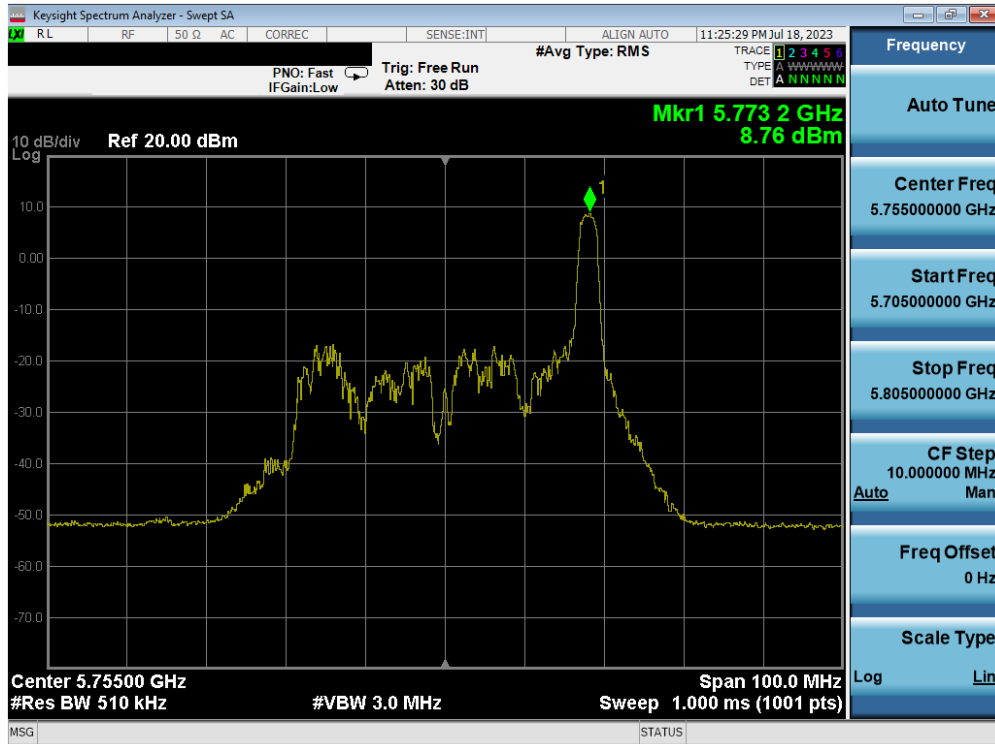

Plot 7-85. Power Spectral Density Plot MIMO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 151)

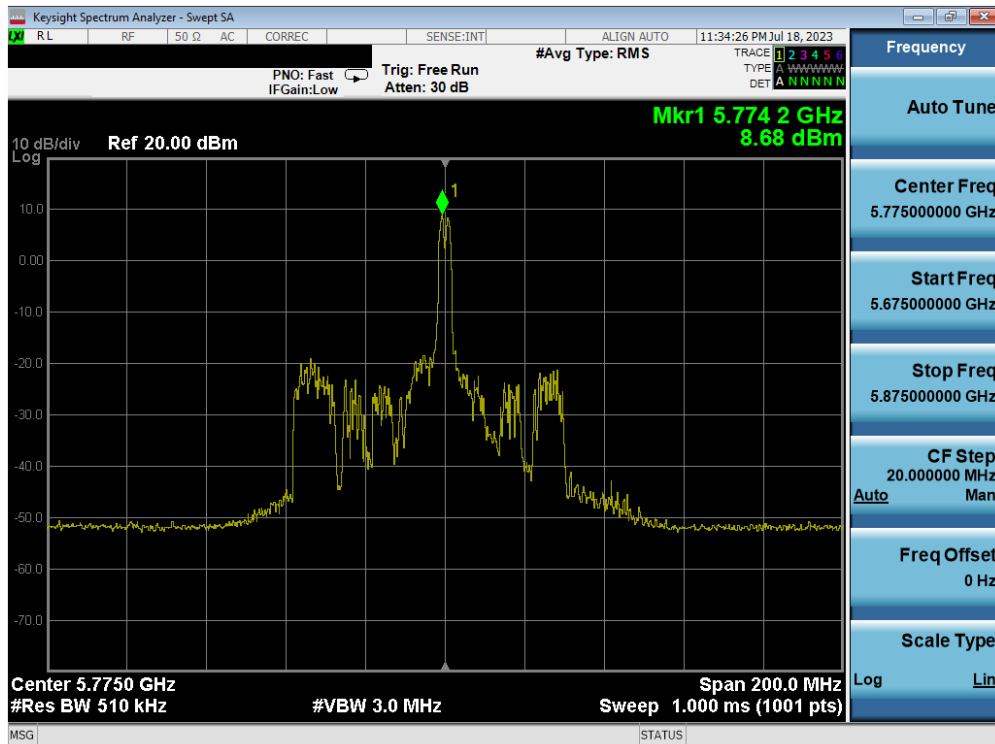


Plot 7-86. Power Spectral Density Plot MIMO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 155)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 76 of 154




Plot 7-87. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 4) – Ch. 173)

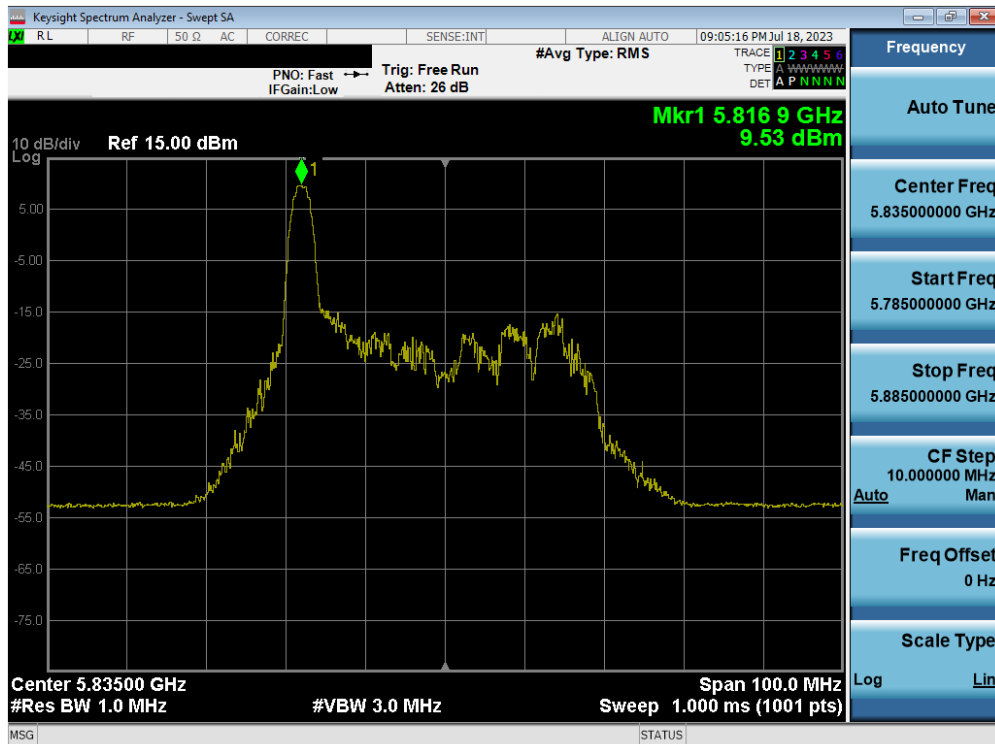


Plot 7-88. Power Spectral Density Plot MIMO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 3/4) – Ch. 167)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 77 of 154

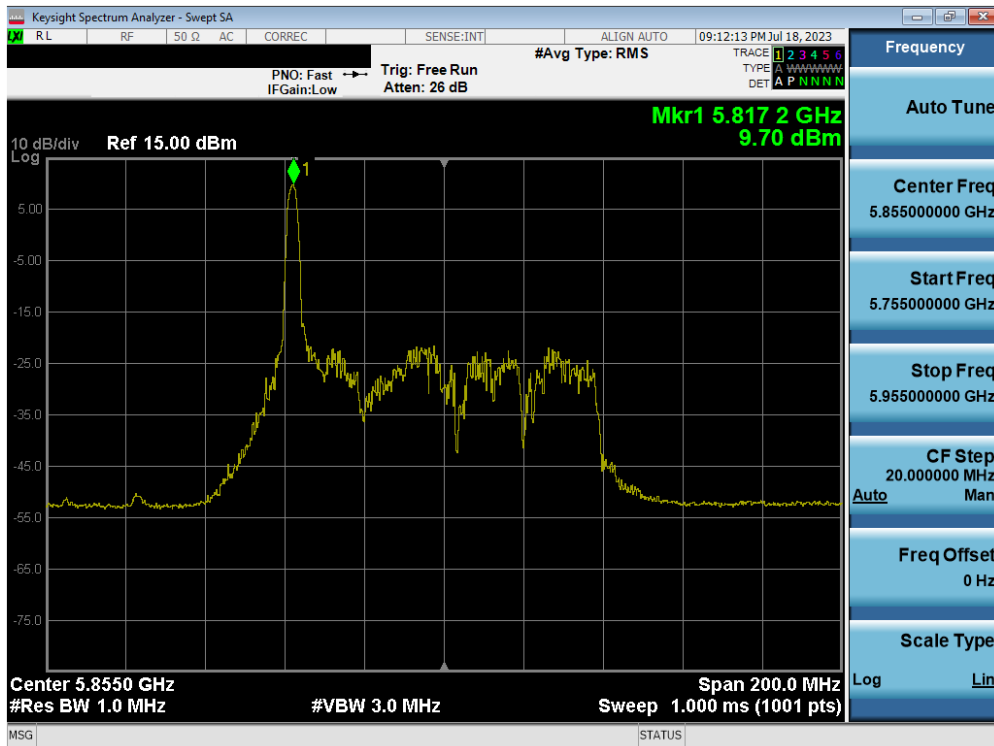


Plot 7-89. Power Spectral Density Plot MIMO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 3/4) – Ch. 171)

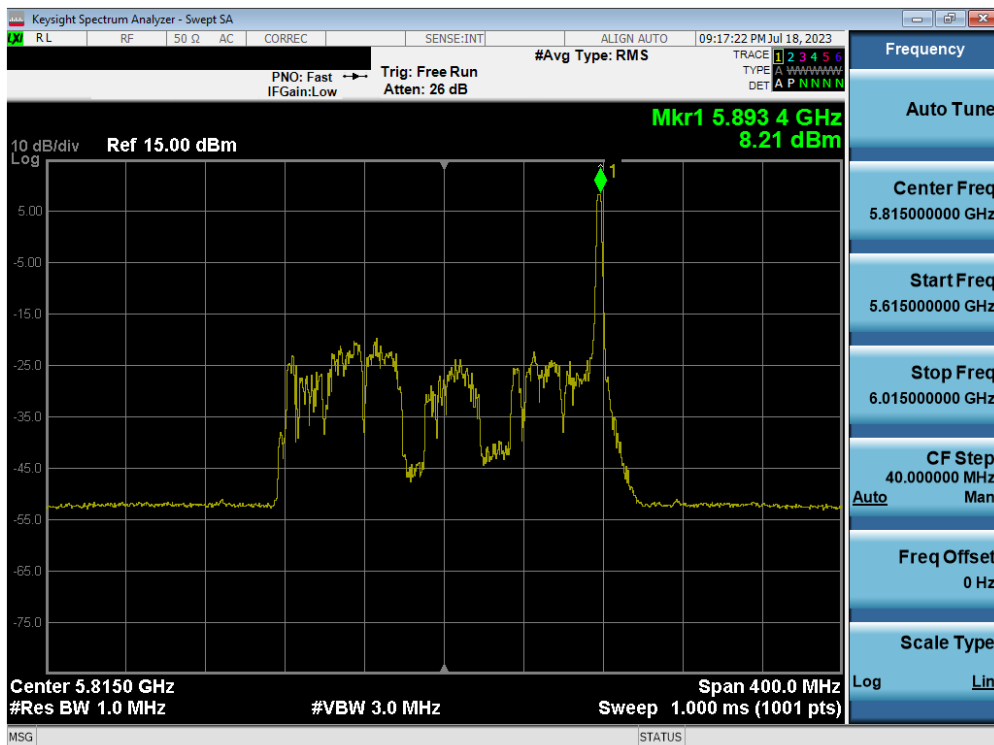


Plot 7-90. Power Spectral Density Plot MIMO ANT1 (160MHz BW 802.11ax – 26 Tones (UNII Band 3/4) – Ch. 163)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 78 of 154

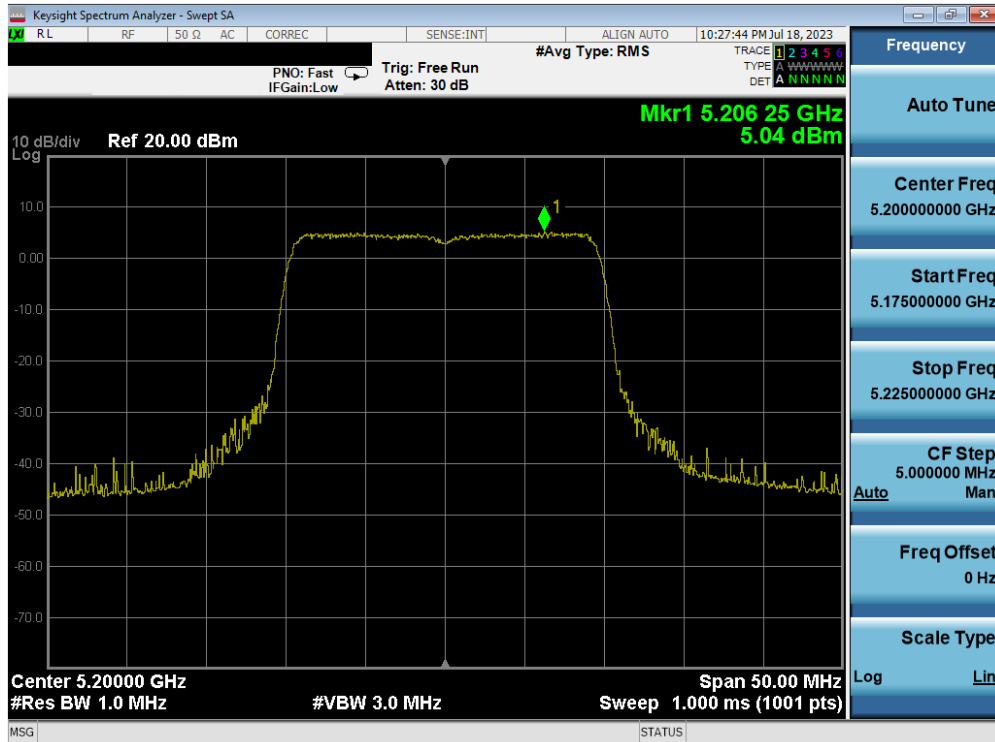


Plot 7-91. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11ax – Full Tones (UNII Band 1) – Ch. 40)

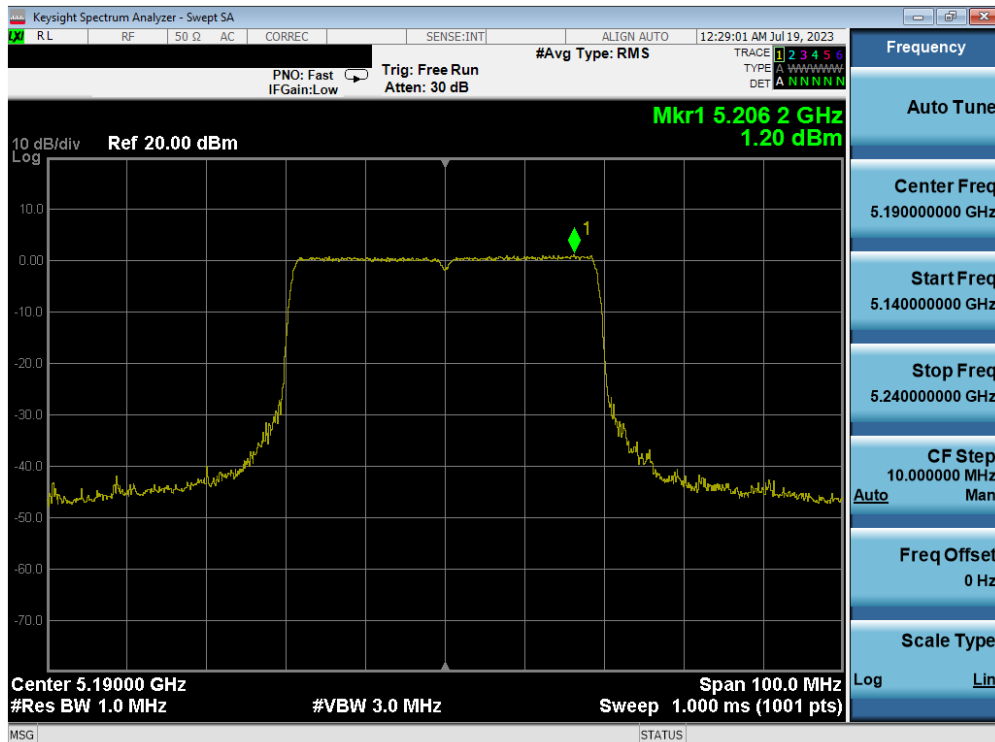


Plot 7-92. Power Spectral Density Plot MIMO ANT1 (40MHz BW 802.11ax – Full Tones (UNII Band 1) – Ch. 38)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 79 of 154

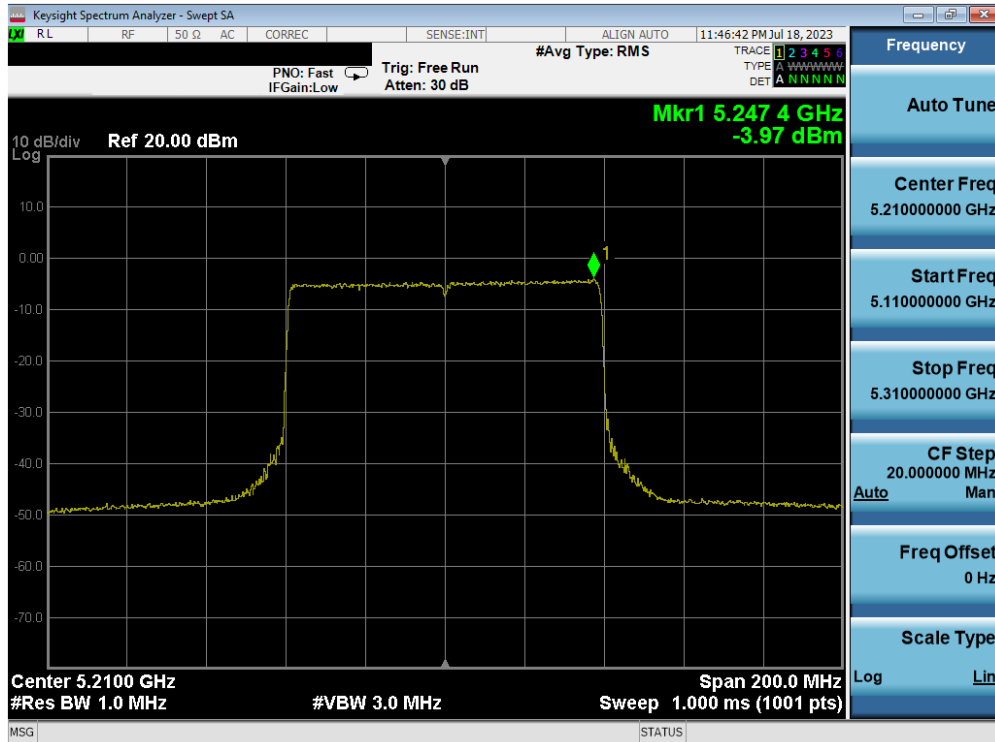


Plot 7-93. Power Spectral Density Plot MIMO ANT1 (80MHz BW 802.11ax – Full Tones (UNII Band 1) – Ch. 42)

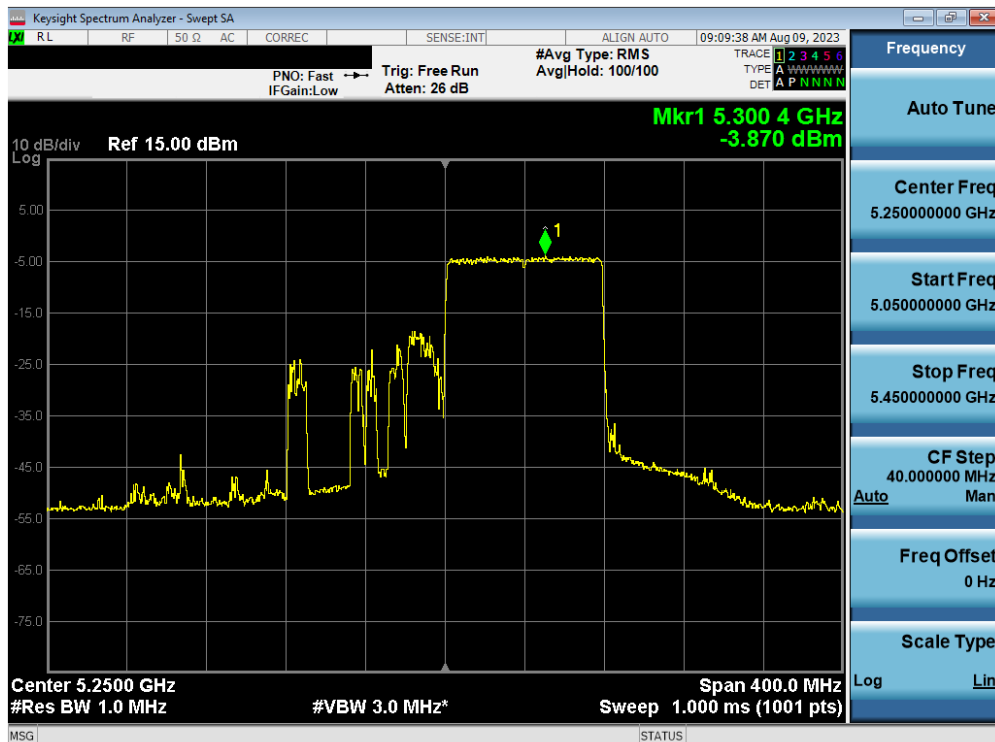


Plot 7-94. Power Spectral Density Plot MIMO ANT1 (160MHz BW 802.11ax – Full Tones (UNII Band 1/2A) – Ch. 50)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 80 of 154

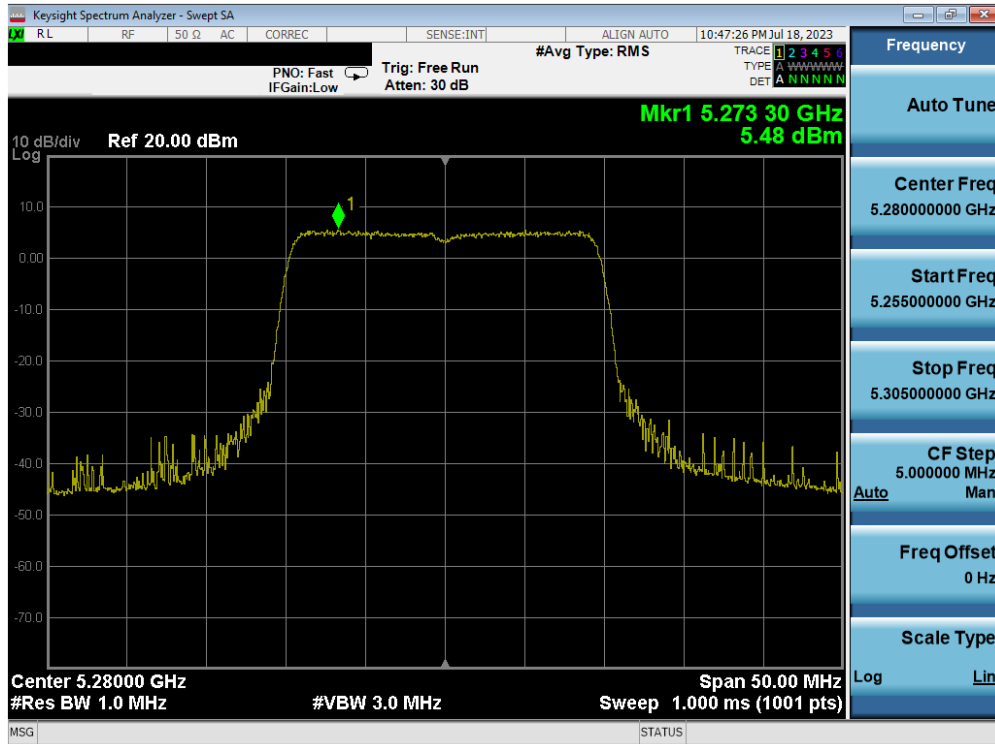


Plot 7-95. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11ax – Full Tones (UNII Band 2A) – Ch. 56)

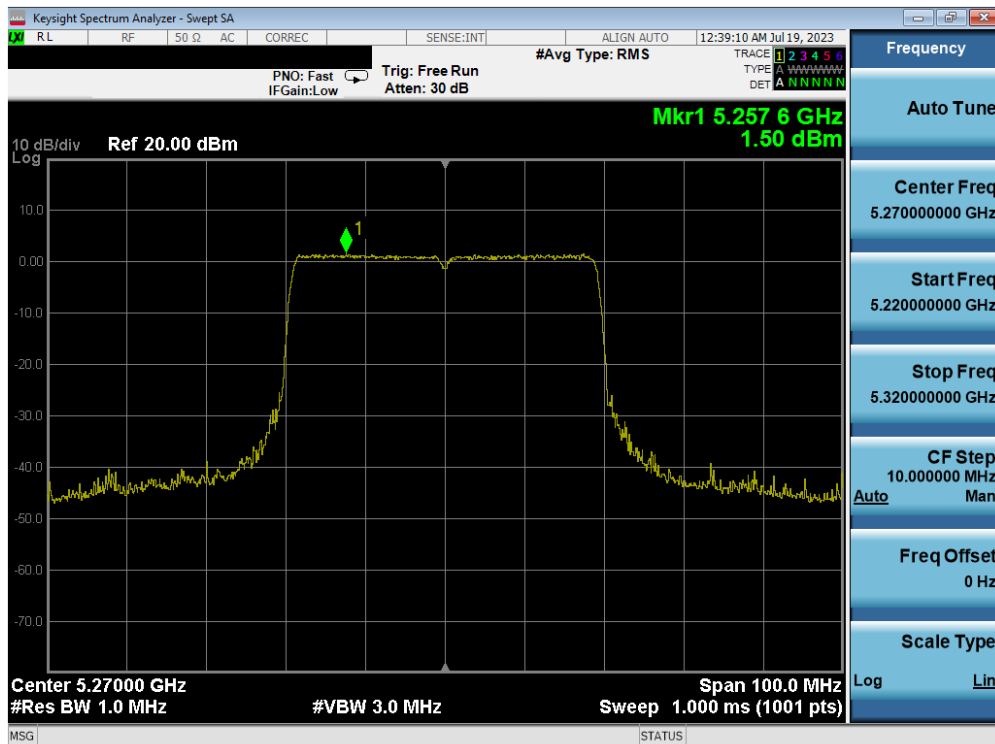


Plot 7-96. Power Spectral Density Plot MIMO ANT1 (40MHz BW 802.11ax – Full Tones (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 81 of 154

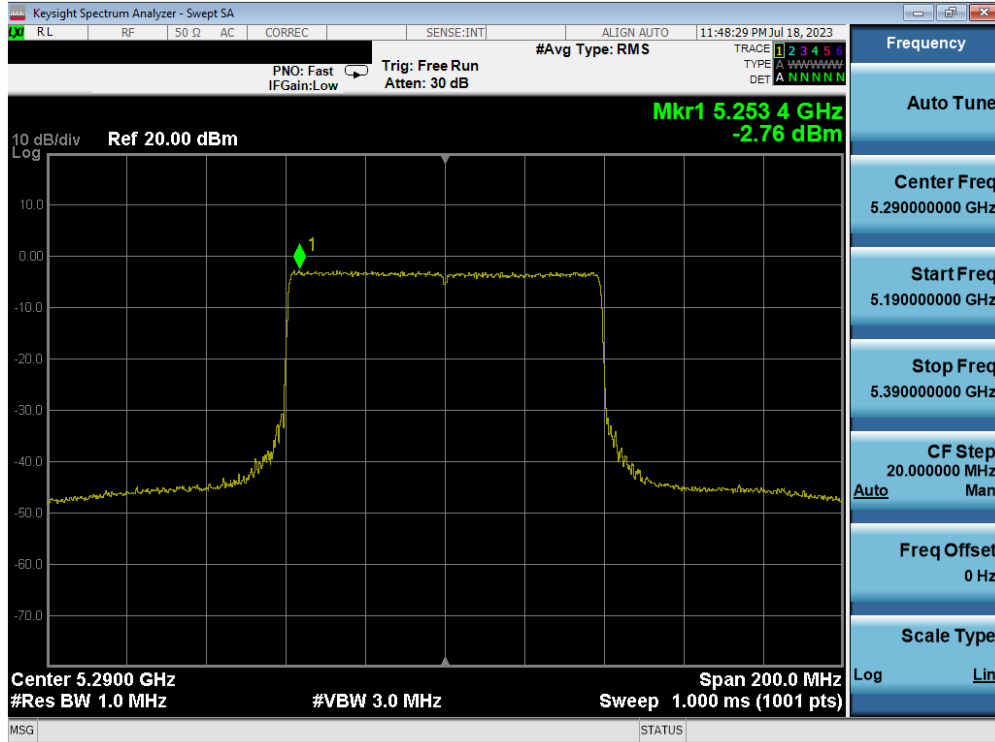


Plot 7-97. Power Spectral Density Plot MIMO ANT1 (80MHz BW 802.11ax – Full Tones (UNII Band 2A) – Ch. 58)

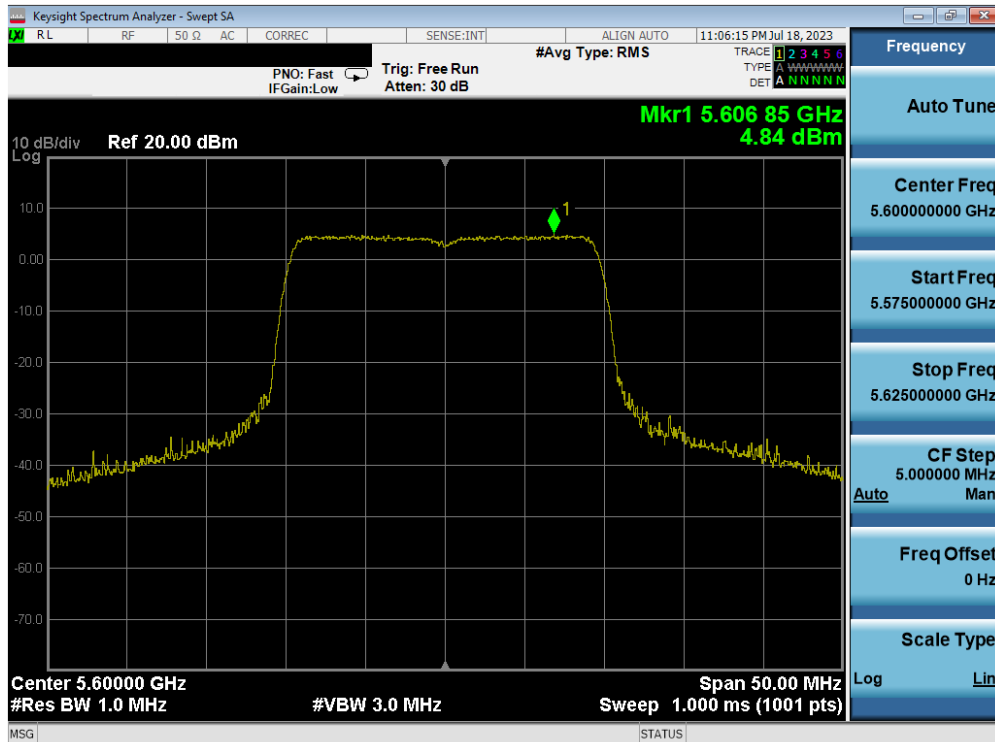


Plot 7-98. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11ax – Full Tones (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 82 of 154

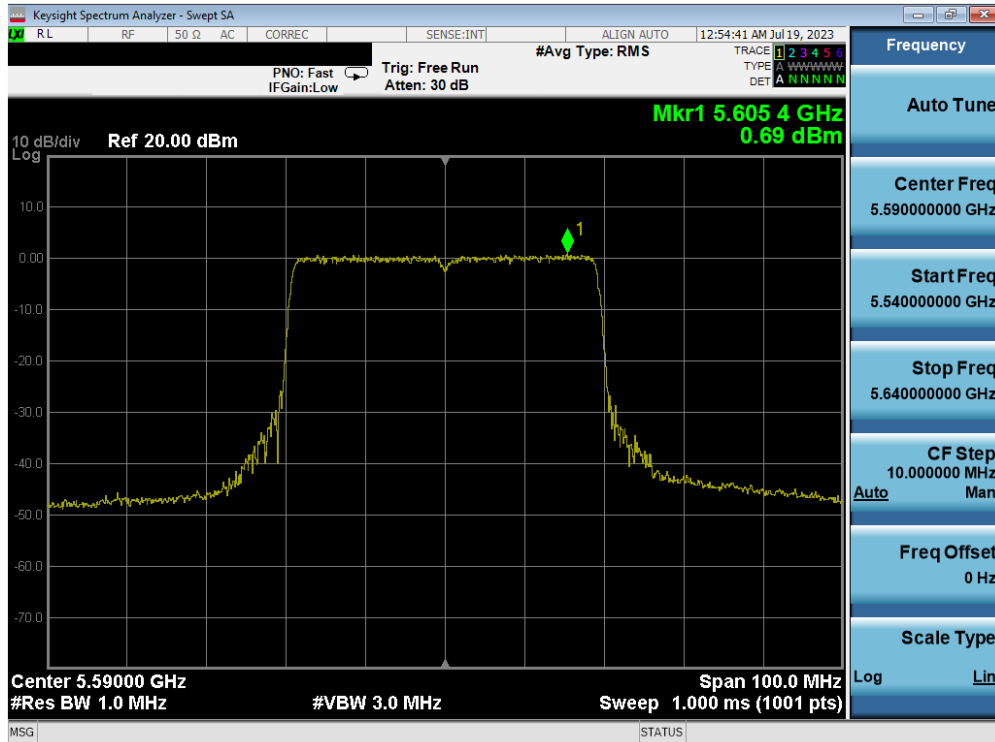


Plot 7-99. Power Spectral Density Plot MIMO ANT1 (40MHz BW 802.11ax – Full Tones (UNII Band 2C) – Ch. 118)

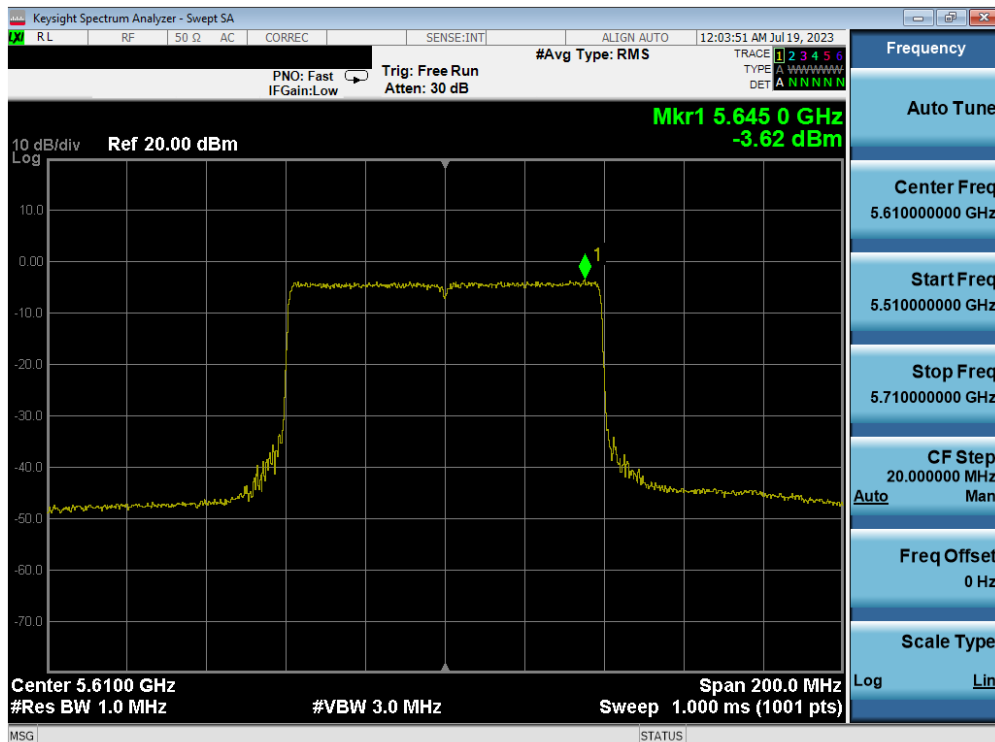


Plot 7-100. Power Spectral Density Plot MIMO ANT1 (80MHz BW 802.11ax – Full Tones (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMS711B		MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 83 of 154	

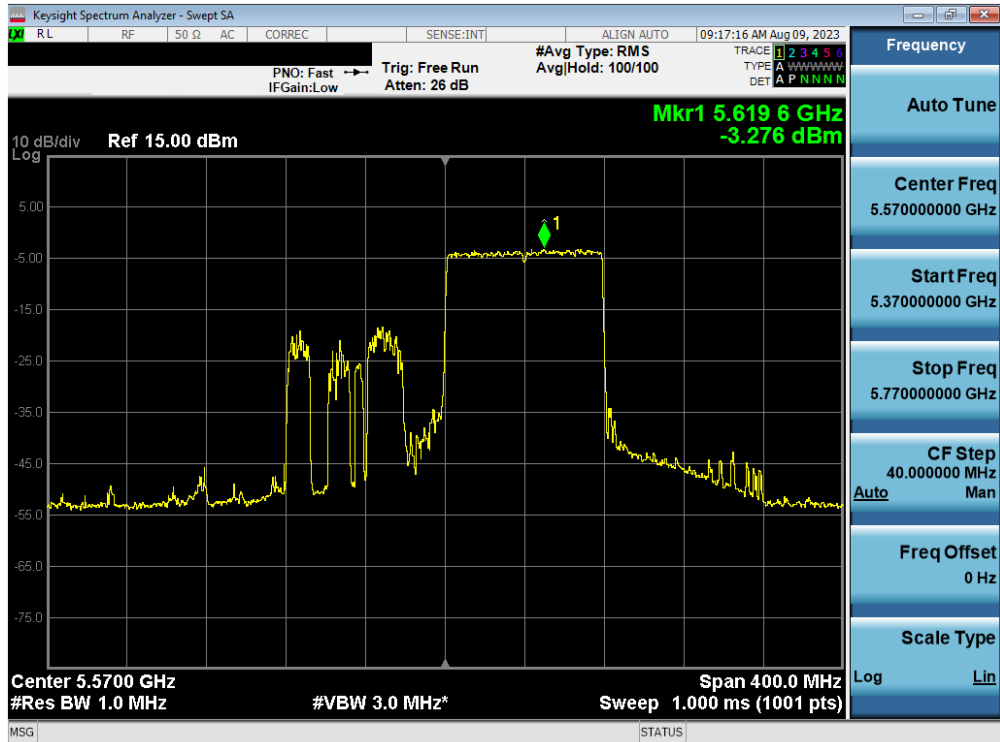


Plot 7-101. Power Spectral Density Plot MIMO ANT1 (160MHz BW 802.11ax – Full Tones (UNII Band 2C) – Ch. 114)

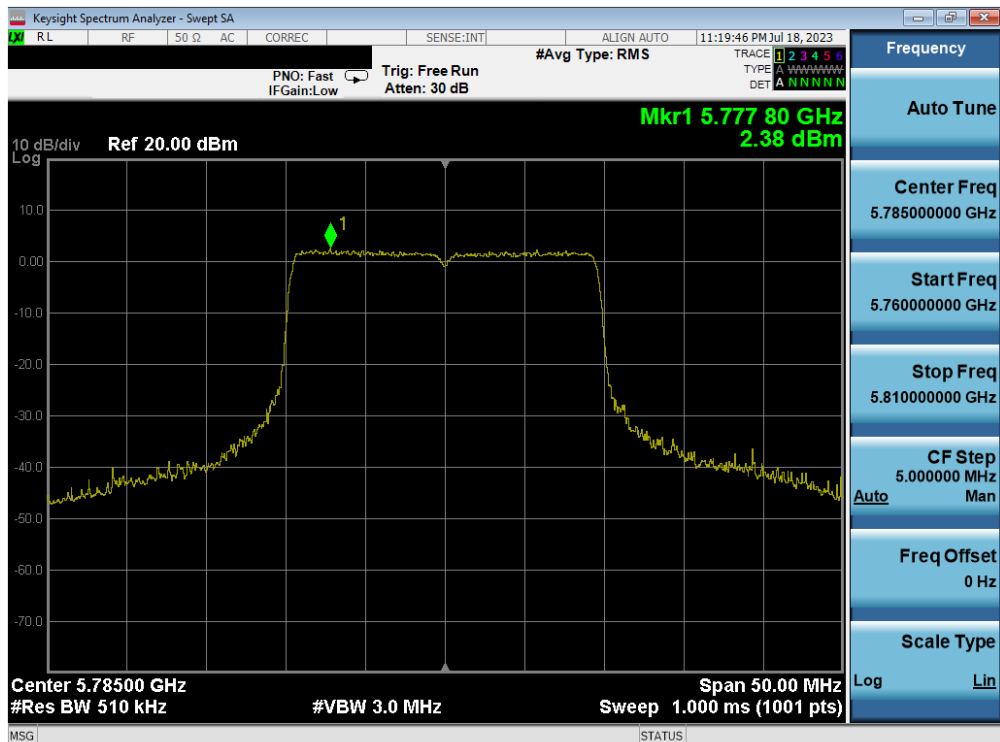


Plot 7-102. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11ax – Full Tones (UNII Band 3) – Ch. 157)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 84 of 154

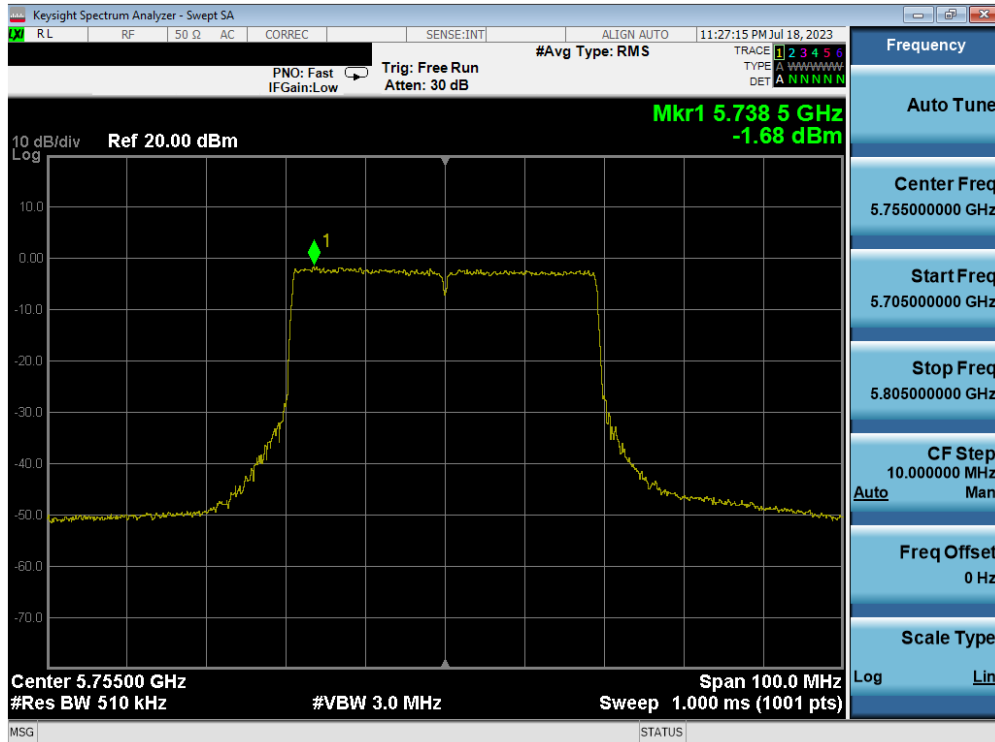


Plot 7-103. Power Spectral Density Plot MIMO ANT1 (40MHz BW 802.11ax – Full Tones (UNII Band 3) – Ch. 151)

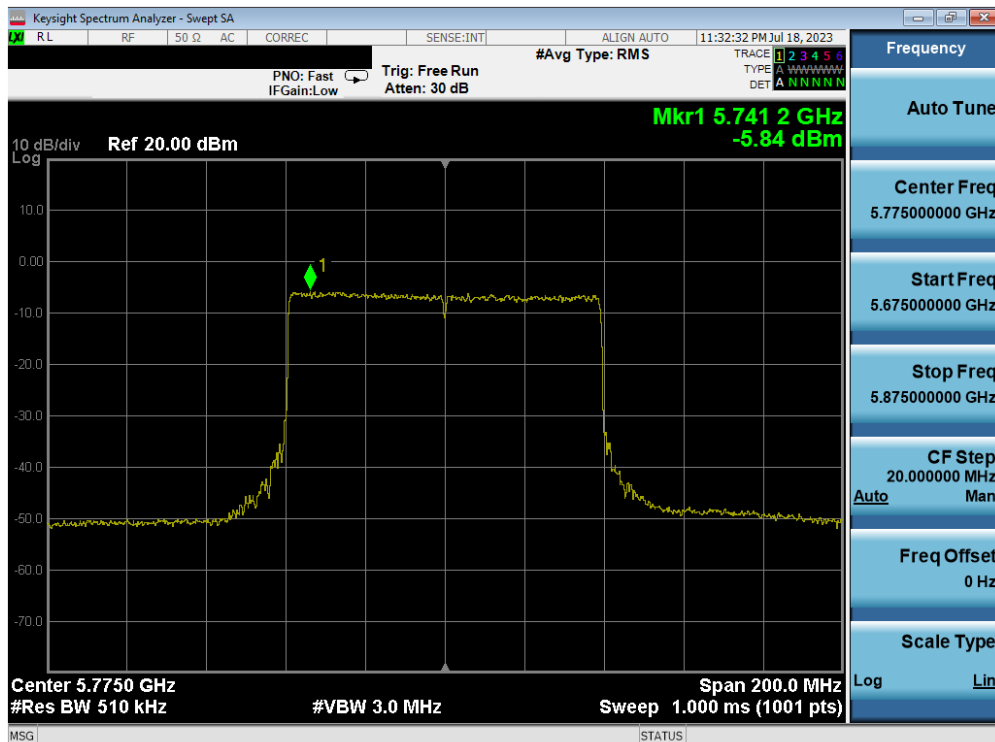


Plot 7-104. Power Spectral Density Plot MIMO ANT1 (80MHz BW 802.11ax – Full Tones (UNII Band 3) – Ch. 155)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 85 of 154

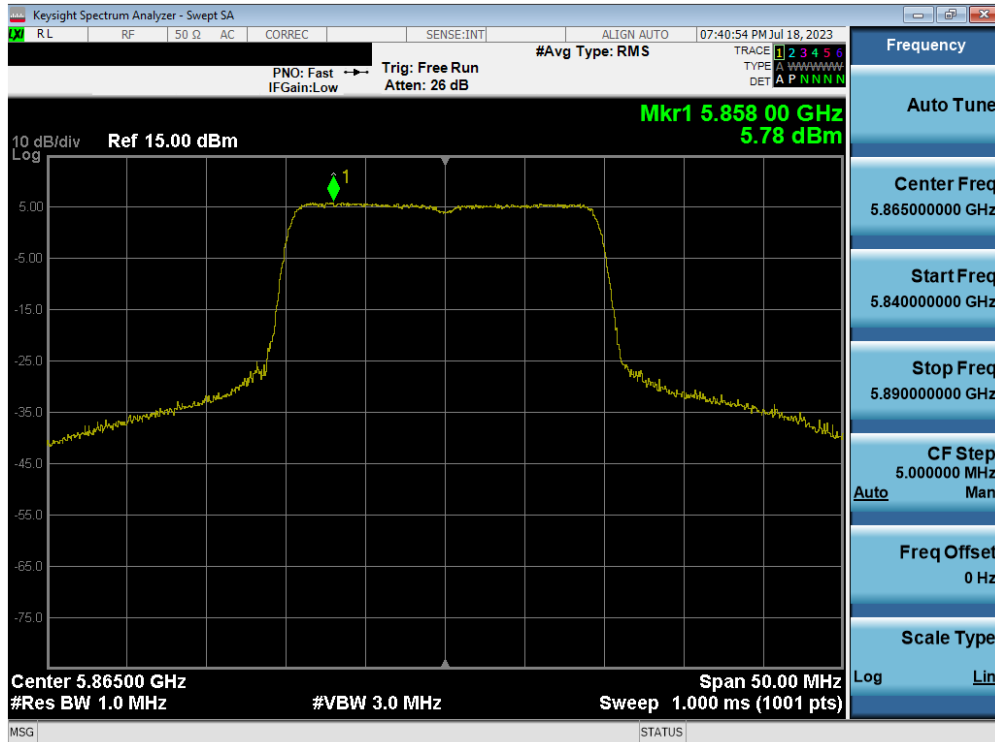


Plot 7-105. Power Spectral Density Plot MIMO ANT1 (20MHz BW 802.11ax – Full Tones (UNII Band 4) – Ch. 173)

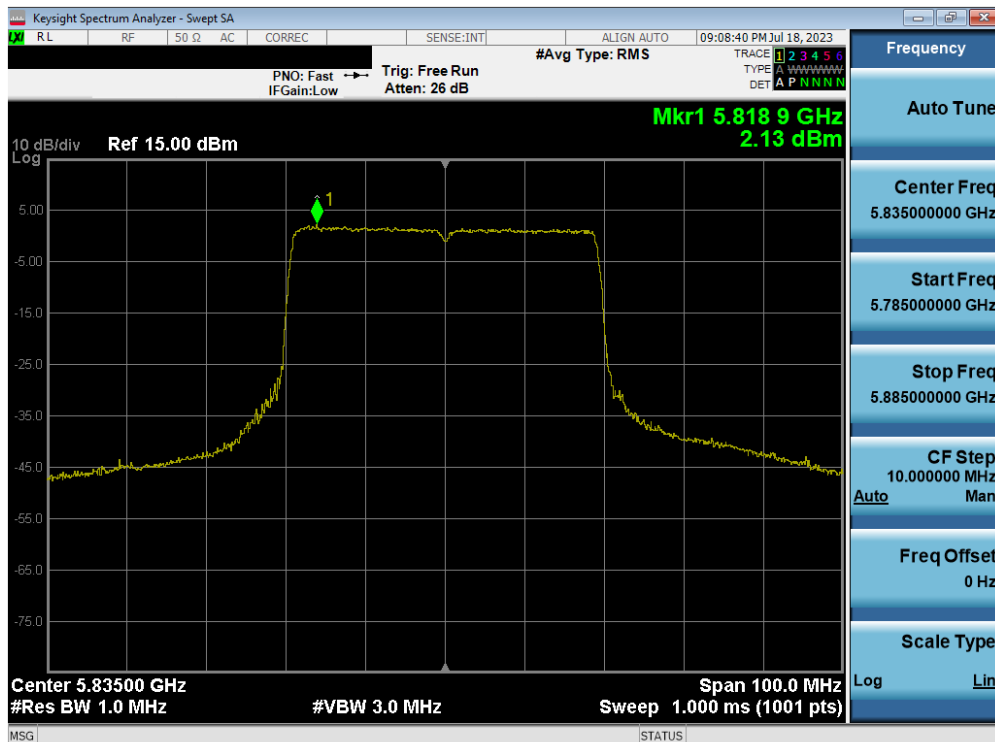


Plot 7-106. Power Spectral Density Plot MIMO ANT1 (40MHz BW 802.11ax – Full Tones (UNII Band 3/4) – Ch. 167)

FCC ID: A3LSMS711B		MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 86 of 154	

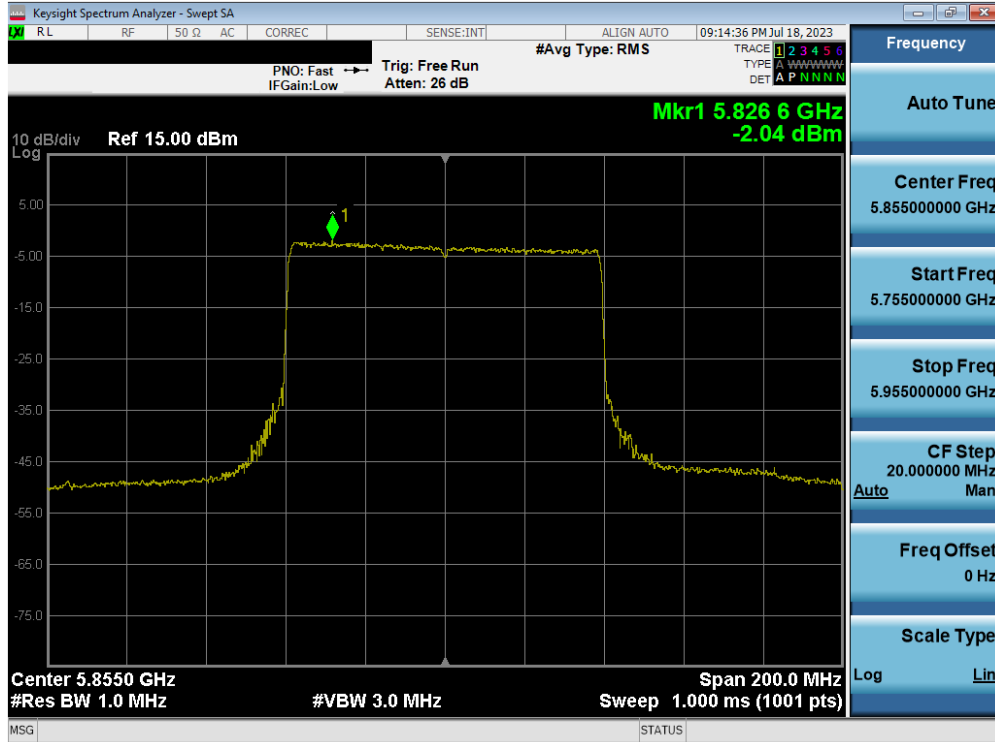


Plot 7-107. Power Spectral Density Plot MIMO ANT1 (80MHz BW 802.11ax – Full Tones (UNII Band 3/4) – Ch. 171)

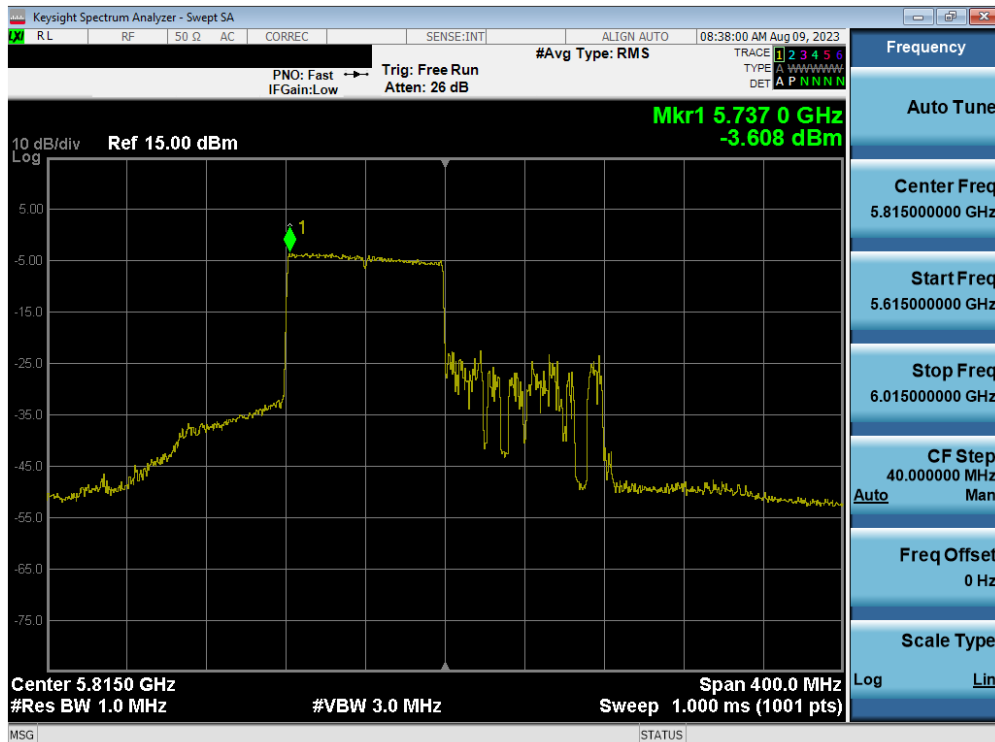


Plot 7-108. Power Spectral Density Plot MIMO ANT1 (160MHz BW 802.11ax – 996 Tones (UNII Band 3/4) – Ch. 163)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 87 of 154

7.5.2 MIMO Antenna-2 Power Spectral Density Measurements

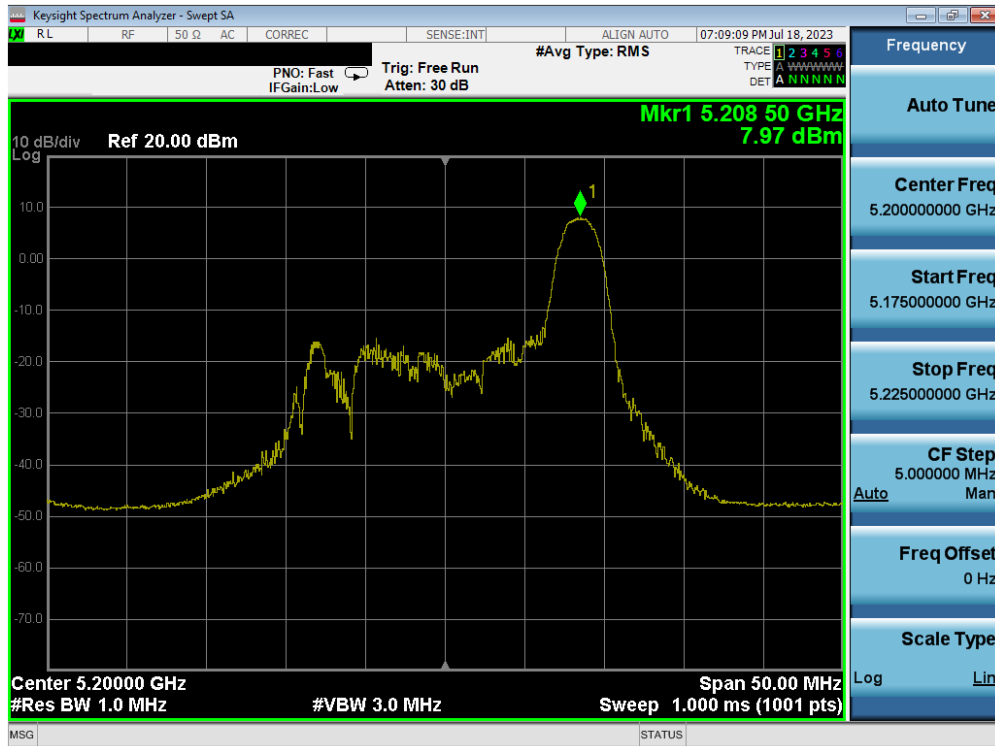

Plot 7-109. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 40)

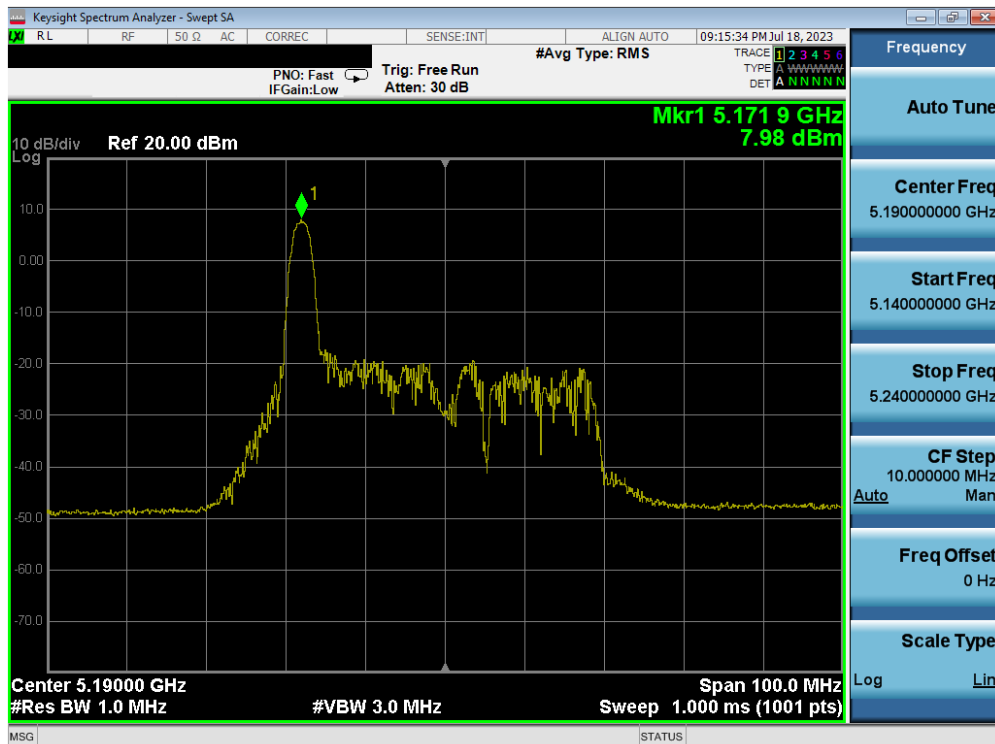

Plot 7-110. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 38)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 88 of 154




Plot 7-111. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 42)



Plot 7-112. Power Spectral Density Plot MIMO ANT2 (160MHz BW 802.11ax – 26 Tones (UNII Band 1/2A) – Ch. 50)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 89 of 154

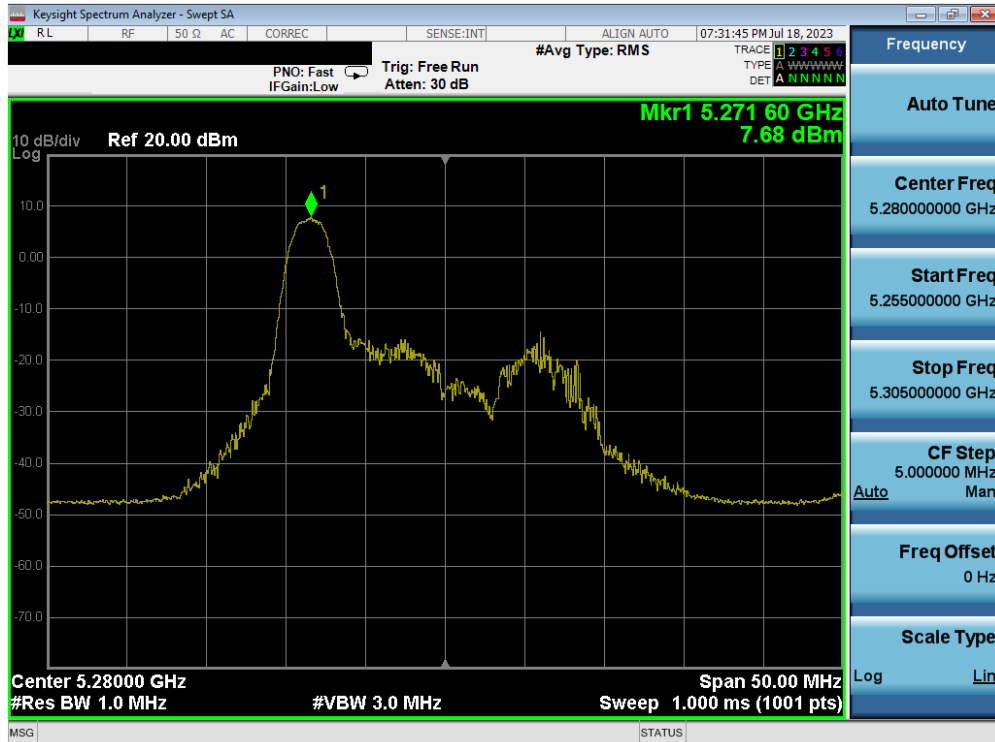


Plot 7-113. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 56)




Plot 7-114. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMS711B		MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 90 of 154	

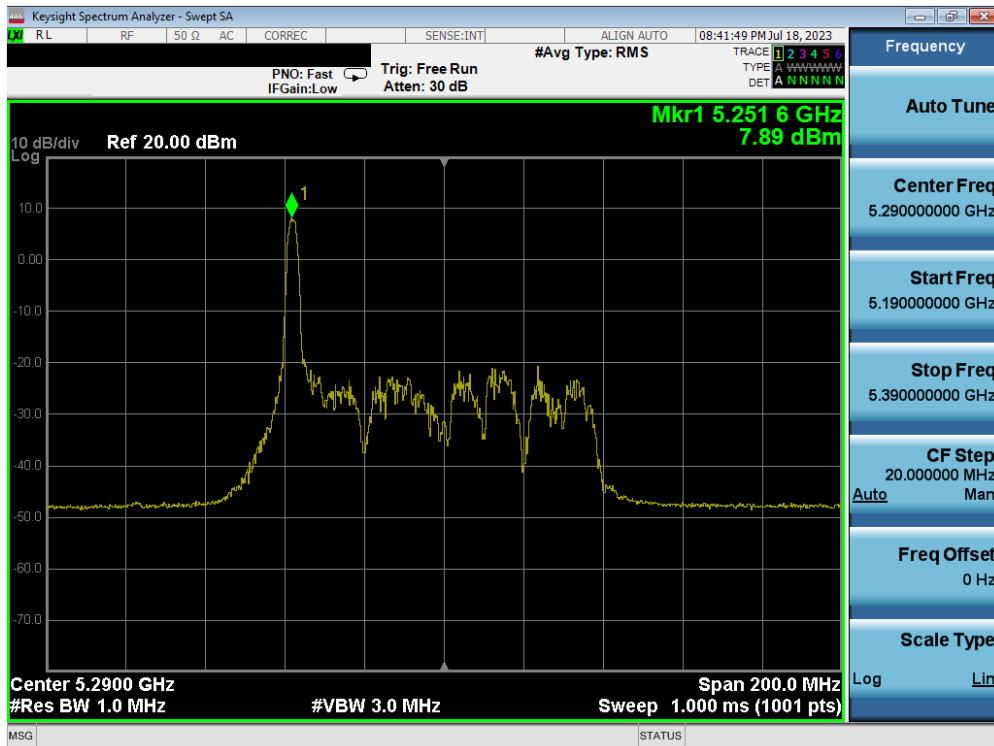


Plot 7-115. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 58)

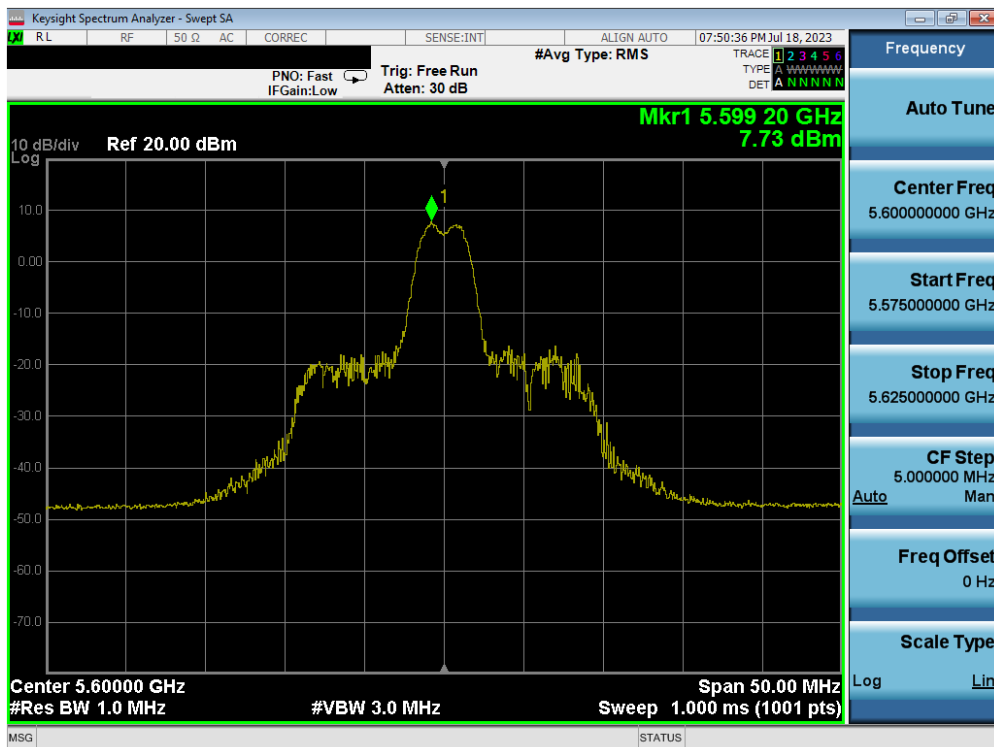

Plot 7-116. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 91 of 154

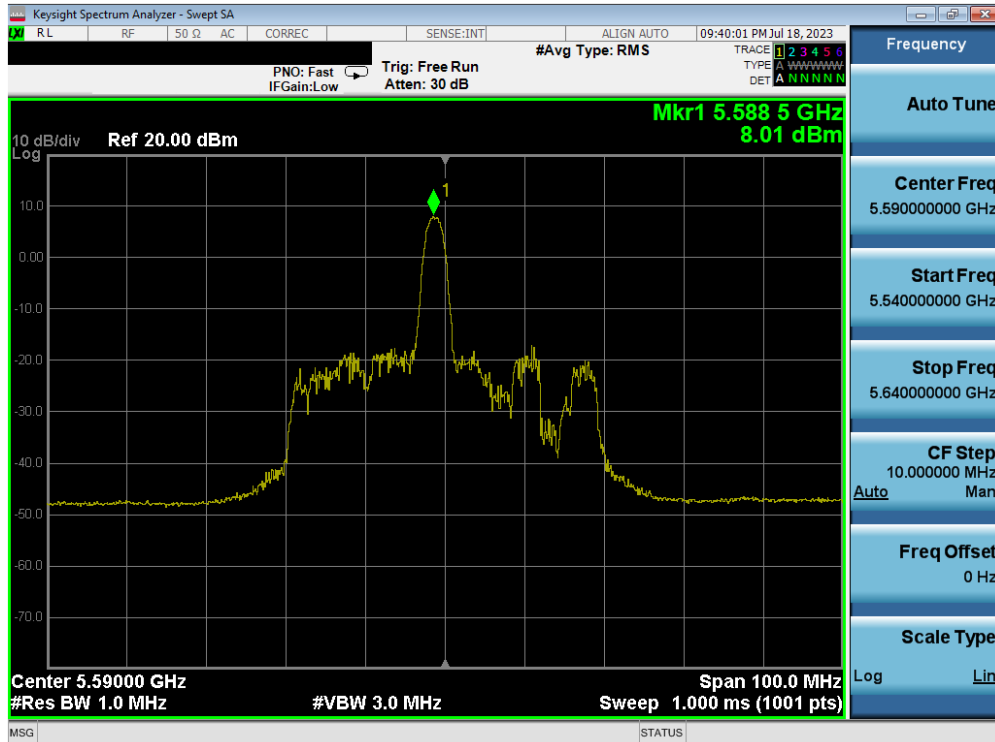


Plot 7-117. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 118)




Plot 7-118. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 92 of 154

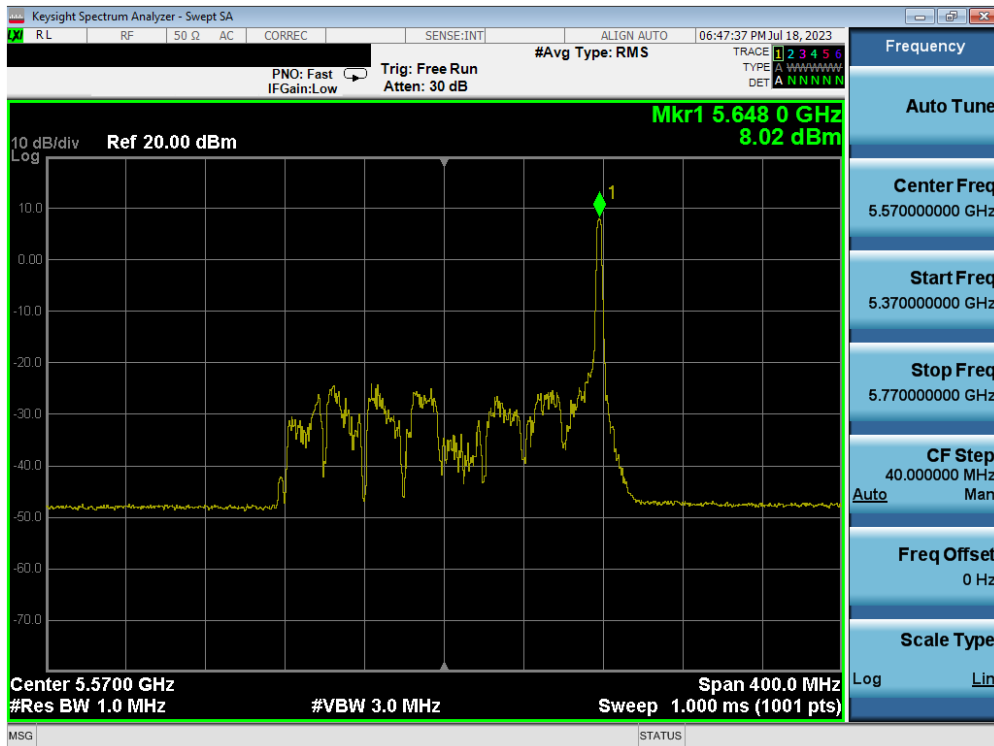

Plot 7-119. Power Spectral Density Plot MIMO ANT2 (160MHz BW 802.11ax – 2 Tones (UNII Band 2C) – Ch. 114)

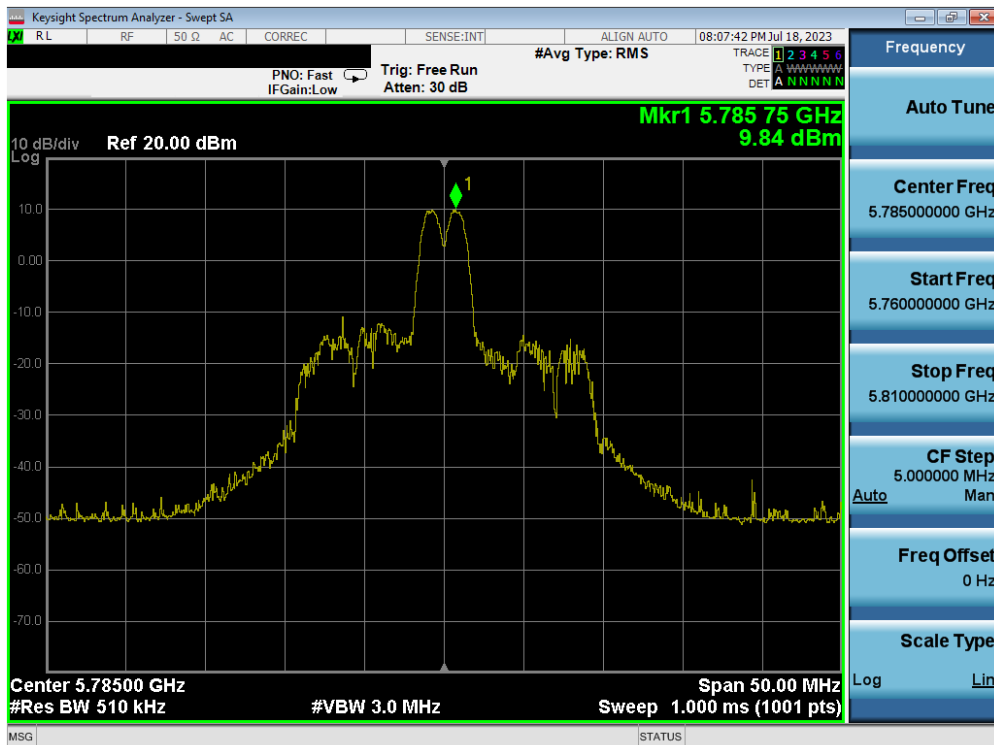


Plot 7-120. Power Spectral Density Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 157)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 93 of 154



Plot 7-121. Power Spectral Density Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 151)

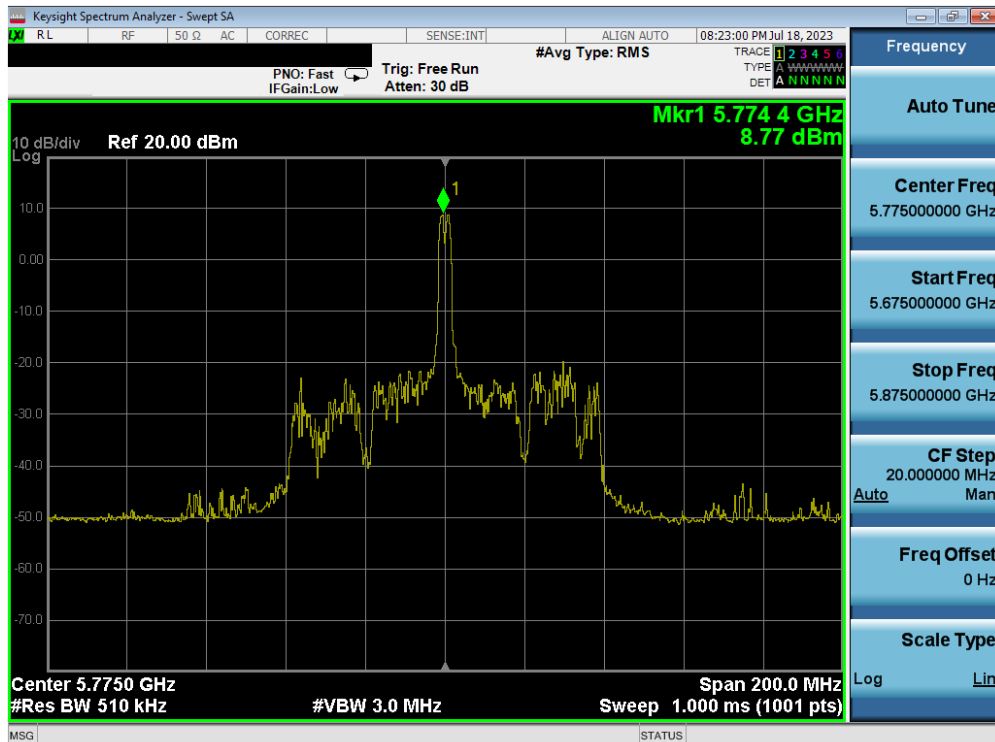

Plot 7-122. Power Spectral Density Plot MIMO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 155)

FCC ID: A3LSMS711B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260063-16.A3L	Test Dates: 5/30 - 8/9/2023	EUT Type: Portable Handset	Page 94 of 154