

APPENDIX A: SAR TEST PLOTS

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26895


Communication System: UID 0, GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3
Medium: 835 Head; Medium parameters used (interpolated):
 $f = 848.8$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 40.461$; $\rho = 1000$ kg/m³
Phantom section: Right Section;

Test Date: 06/07/2023; Ambient Temp: 22.5°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7640; ConvF(10.56, 10.56, 10.56) @ 848.8 MHz; Calibrated: 2/10/2023
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1645; Calibrated: 2/16/2023
Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1937
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Mode: GSM 850, Antenna A, Right Head, Cheek, High.ch

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.45 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.229 W/kg
SAR(1 g) = 0.182 W/kg
Smallest distance from peaks to all points 3 dB below = 22.6 mm
Ratio of SAR at M2 to SAR at M1 = 79.7%

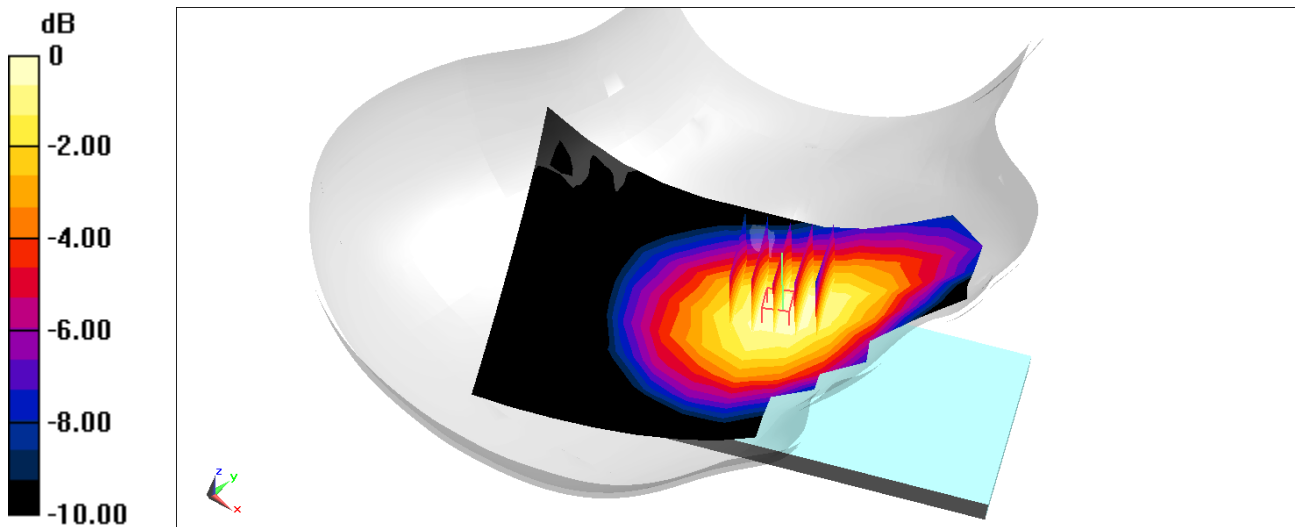

0 dB = 0.213 W/kg = -6.72 dBW/kg

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26747

Communication System: UID:10021 - DAC, GSM; MAIA: Y; Frequency: 1880.0 MHz

Medium: 1900 Head; Medium parameters used:

f = 1880.0 MHz; cond = 1.44 S/m; perm = 41.2; density = 1000 kg/m³

Phantom Section: LeftHead; Space: 0.00 mm

Test Date: 06/08/2023; Ambient Temp: 20.0°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7565; ConvF:(7.89,7.89,7.89); Calibrated: 2023-01-12

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1466; Calibrated: 2023-01-20

Phantom: Twin-SAM V5.0; Serial: 1868

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: GSM 1900, Antenna A, Left Head, Cheek, Mid Ch.

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.09 W/kg; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.143 W/kg

SAR(1 g) = 0.096 W/kg

Smallest distance from peaks to all points 3 dB below is 11.4 mm

Ratio of SAR at M2 to SAR at M1 = 88.2 %

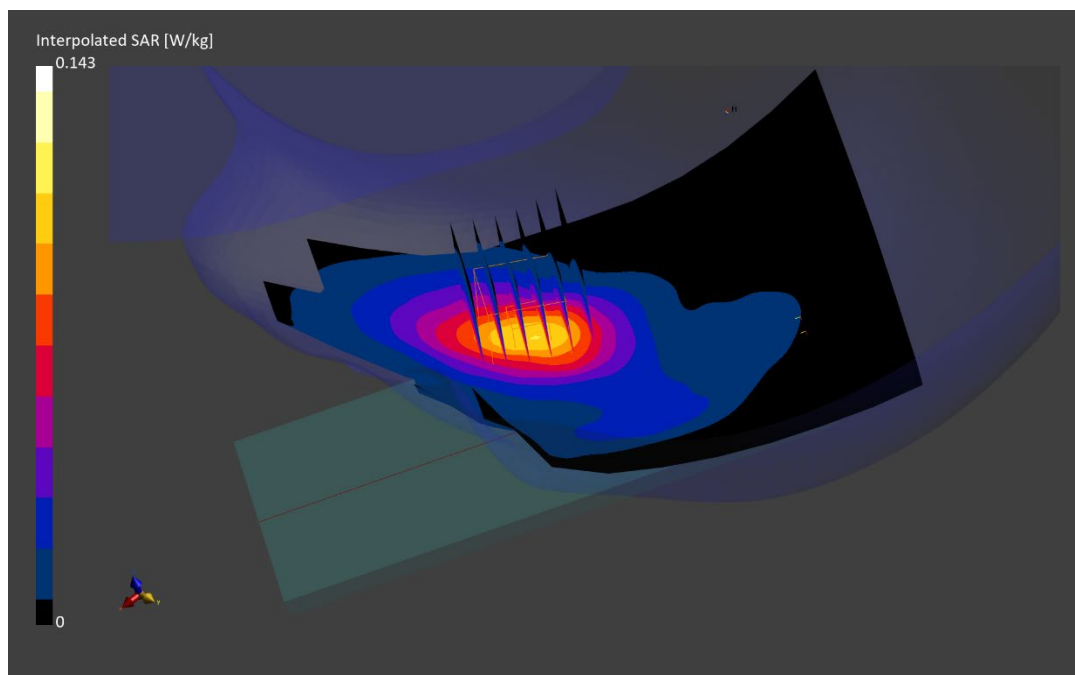

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26895


Communication System: UID 0, UMTS; Frequency: 846.6 MHz; Duty Cycle: 1:1
Medium: 835 Head; Medium parameters used (interpolated):
 $f = 846.6 \text{ MHz}$; $\sigma = 0.9 \text{ S/m}$; $\epsilon_r = 40.49$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section;

Test Date: 06/07/2023; Ambient Temp: 22.5°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7640; ConvF(10.56, 10.56, 10.56) @ 846.6 MHz; Calibrated: 2/10/2023
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1645; Calibrated: 2/16/2023
Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1937
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Mode: UMTS 850, Antenna A, Right Head, Cheek, High.ch

Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 17.63 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.343 W/kg
SAR(1 g) = 0.276 W/kg
Smallest distance from peaks to all points 3 dB below = 26.3 mm
Ratio of SAR at M2 to SAR at M1 = 81.7%

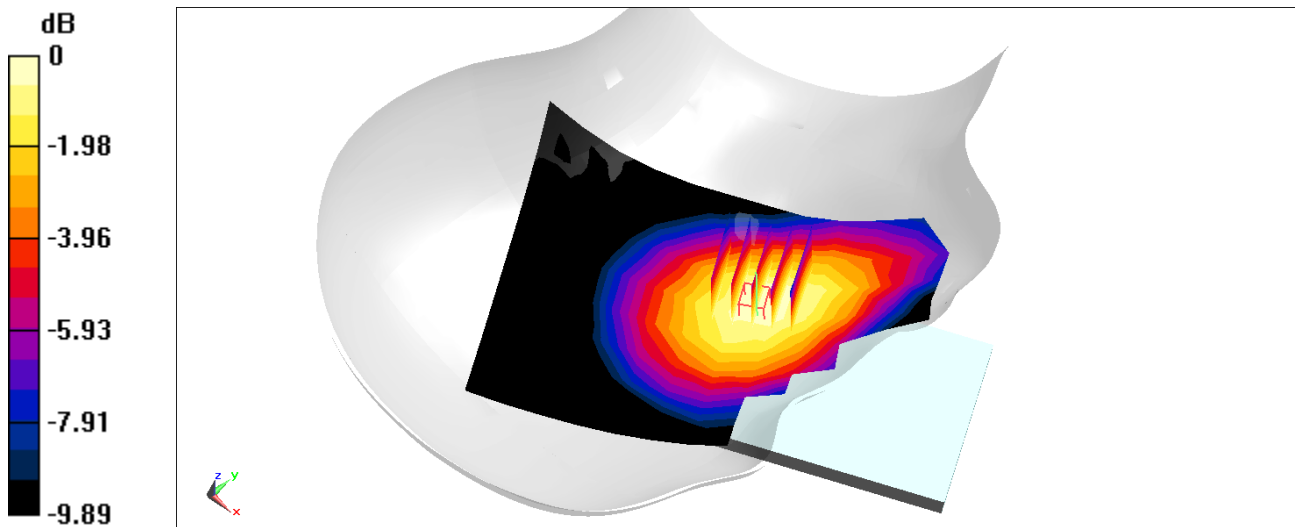

0 dB = 0.319 W/kg = -4.96 dBW/kg

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26655

Communication System: UID:10011 - CAB, WCDMA; MAIA: Y; Frequency: 1712.4 MHz

Medium: 1750 Head; Medium parameters used:

f = 1712.4 MHz; cond = 1.28 S/m; perm = 41.8; density = 1000 kg/m³

Phantom Section: LeftHead; Space: 0.00 mm

Test Date: 06/12/2023; Ambient Temp: 22.5°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7547; ConvF:(8.16,8.16,8.16); Calibrated: 2022-10-19

Sensor-Surface: 1.4mm (All points)

Electronics: DAE4 Sn1322; Calibrated: 2022-10-17

Phantom: Twin-SAM V8.0; Serial: 1934

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: UMTS 1750, Antenna A, Left Head, Cheek, Low Ch.

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.15 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.263 W/kg

SAR(1 g) = 0.178 W/kg

Smallest distance from peaks to all points 3 dB below is 12.4 mm

Ratio of SAR at M2 to SAR at M1 = 88.2 %

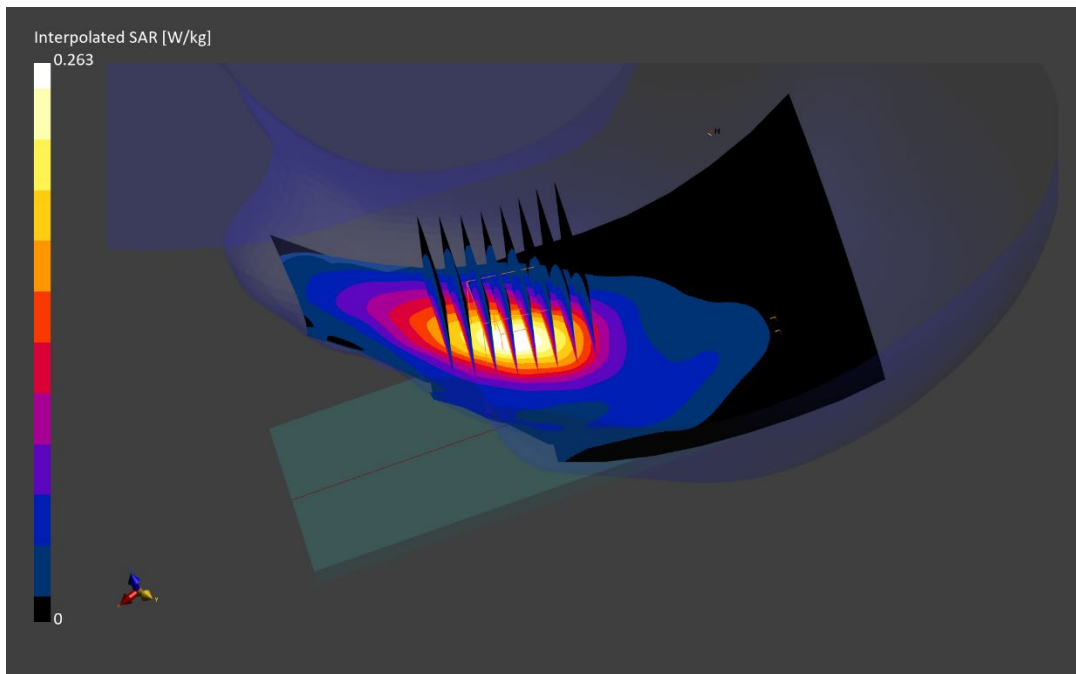

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26747

Communication System: UID:10011 - CAB, WCDMA; MAIA: Y; Frequency: 1852.4 MHz

Medium: 1900 Head; Medium parameters used:

f = 1852.4 MHz; cond = 1.34 S/m; perm = 41.9; density = 1000 kg/m³

Phantom Section: LeftHead; Space: 0.00 mm

Test Date: 06/19/2023; Ambient Temp: 23.0°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7547; ConvF:(7.81,7.81,7.81); Calibrated: 2022-10-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1322; Calibrated: 2022-10-17

Phantom: Twin-SAM V8.0; Serial: 1934

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: UMTS 1900, Antenna A, Left Head, Cheek, Low Ch.

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.20 W/kg; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.326 W/kg

SAR(1 g) = 0.225 W/kg

Smallest distance from peaks to all points 3 dB below is 12.5 mm

Ratio of SAR at M2 to SAR at M1 = 89.3 %

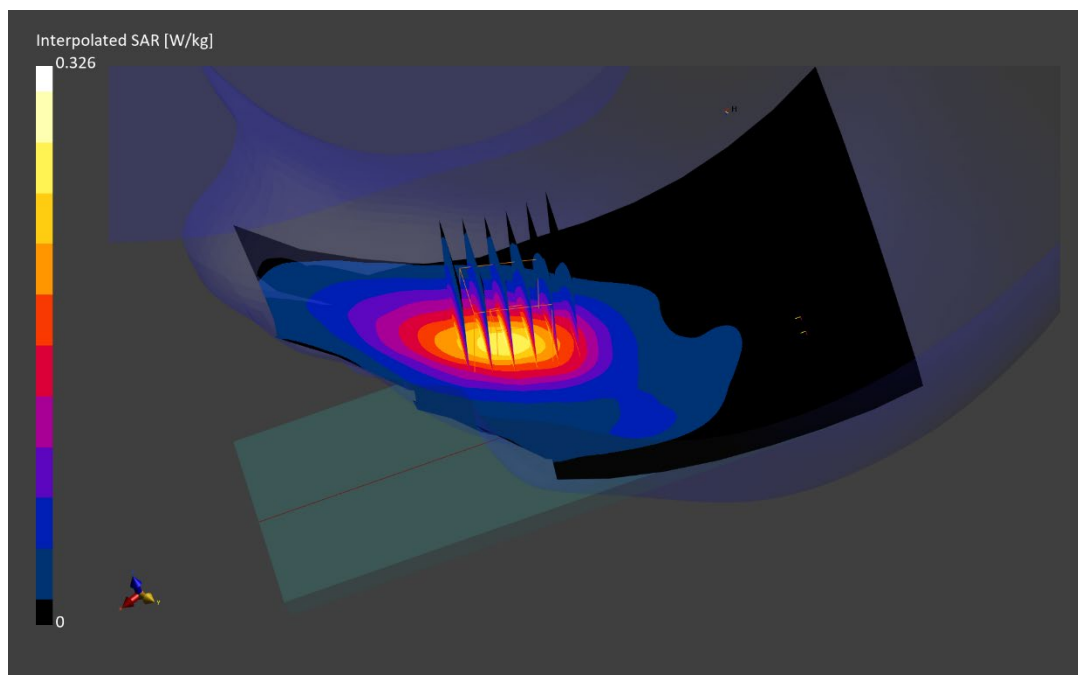

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 25764

Communication System: UID 0, LTE Band 71; Frequency: 680.5 MHz; Duty Cycle: 1:1
Medium: 750 Head; Medium parameters used (interpolated):
 $f = 680.5$ MHz; $\sigma = 0.866$ S/m; $\epsilon_r = 42.947$; $\rho = 1000$ kg/m³
Phantom section: Right Section

Test Date: 06/08/2023; Ambient Temp: 22.6°C; Tissue Temp: 23.1°C

Probe: EX3DV4 - SN7637; ConvF(10.29, 10.29, 10.29) @ 680.5 MHz; Calibrated: 3/16/2023
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1652; Calibrated: 3/16/2023
Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Mode: LTE Band 71, Antenna A, Right Head, Cheek, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 14.50 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.206 W/kg

SAR(1 g) = 0.175 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 86.5%

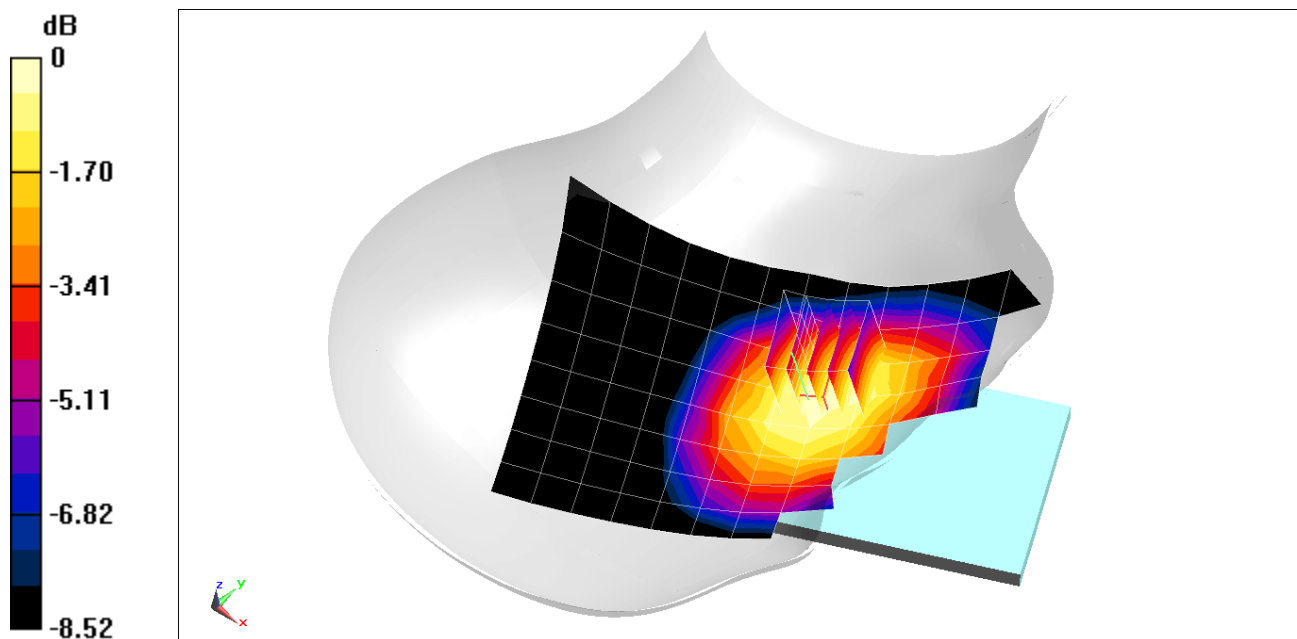

0 dB = 0.195 W/kg = -7.10 dBW/kg

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 25764

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 707.5$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.887$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 06/08/2023; Ambient Temp: 22.6°C; Tissue Temp: 23.1°C

Probe: EX3DV4 - SN7637; ConvF(10.29, 10.29, 10.29) @ 707.5 MHz; Calibrated: 3/16/2023

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1652; Calibrated: 3/16/2023

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Mode: LTE Band 12, Antenna A, Right Head, Cheek, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**

Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 15.78 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.247 W/kg

SAR(1 g) = 0.206 W/kg

Smallest distance from peaks to all points 3 dB below = 23.4 mm

Ratio of SAR at M2 to SAR at M1 = 82.1%

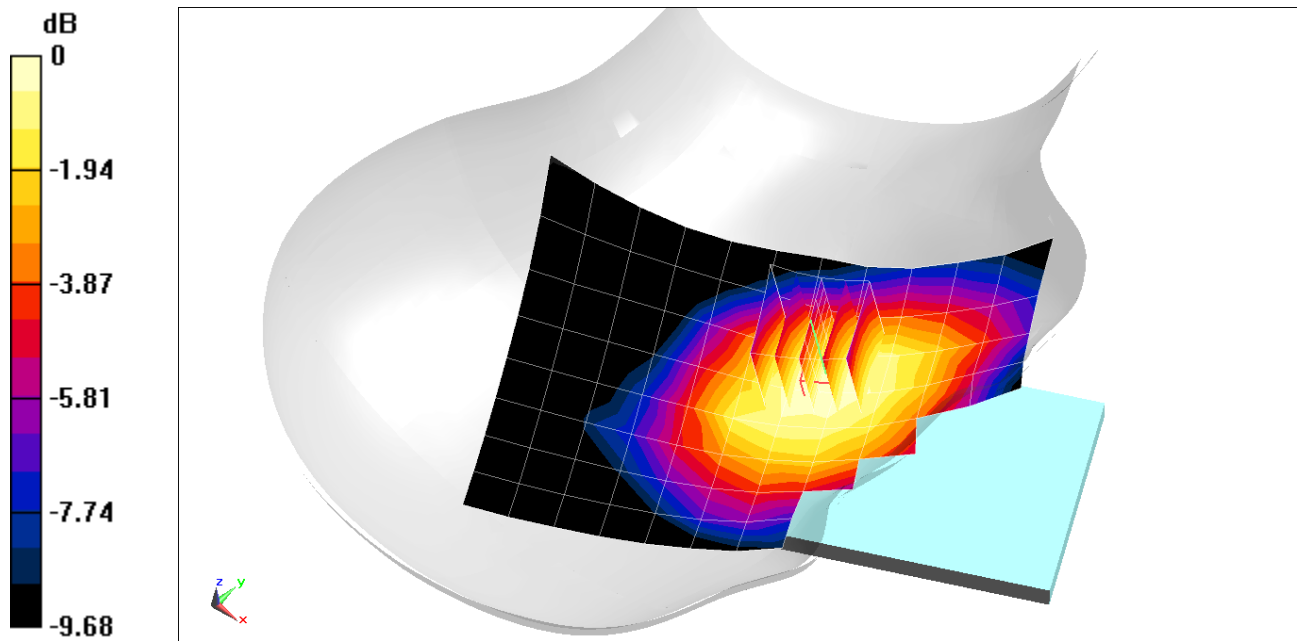

0 dB = 0.235 W/kg = -6.29 dBW/kg

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 25764

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.881 \text{ S/m}$; $\epsilon_r = 41.611$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 06/12/2023; Ambient Temp: 21.2°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7637; ConvF(10.29, 10.29, 10.29) @ 782 MHz; Calibrated: 3/16/2023

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1652; Calibrated: 3/16/2023

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Mode: LTE Band 13, Antenna A, Right Head, Cheek, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**

Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 18.25 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.320 W/kg

SAR(1 g) = 0.273 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 85.4%

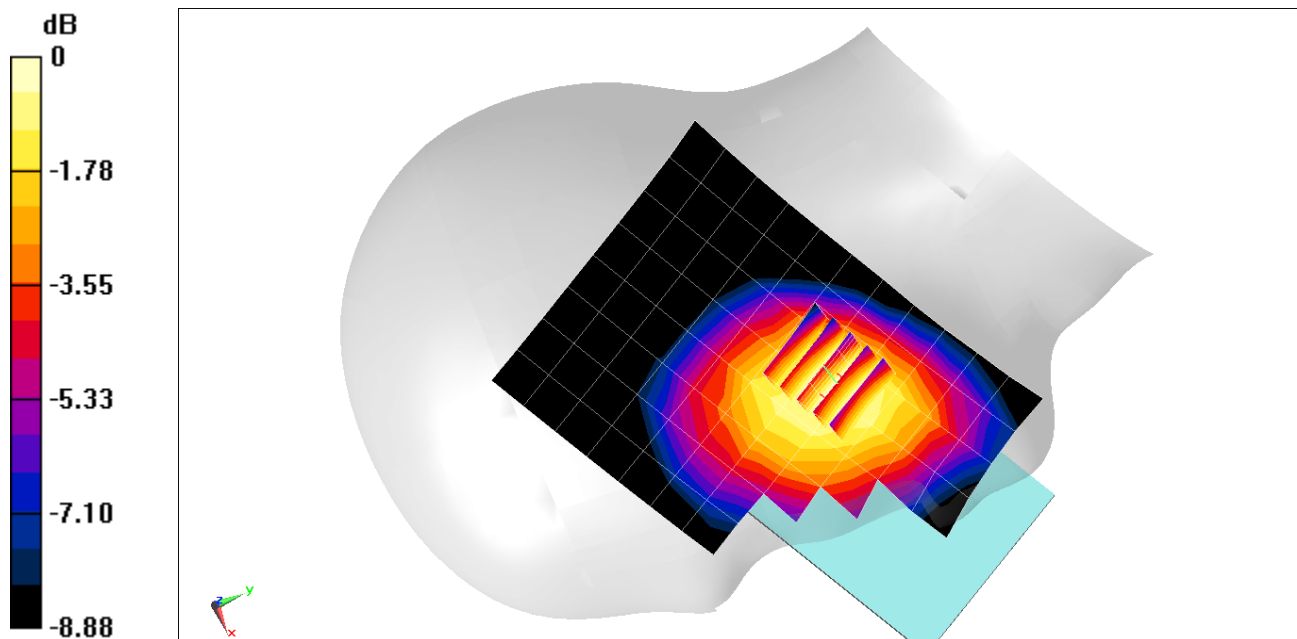

0 dB = 0.308 W/kg = -5.11 dBW/kg

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 25764

Communication System: UID 0, LTE Band 14; Frequency: 793 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 793 \text{ MHz}$; $\sigma = 0.885 \text{ S/m}$; $\epsilon_r = 41.582$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 06/12/2023; Ambient Temp: 21.2°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7637; ConvF(10.29, 10.29, 10.29) @ 793 MHz; Calibrated: 3/16/2023

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1652; Calibrated: 3/16/2023

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Mode: LTE Band 14, Antenna A, Right Head, Cheek, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**

Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 18.28 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.333 W/kg

SAR(1 g) = 0.283 W/kg

Smallest distance from peaks to all points 3 dB below = 23.7 mm

Ratio of SAR at M2 to SAR at M1 = 83.9%

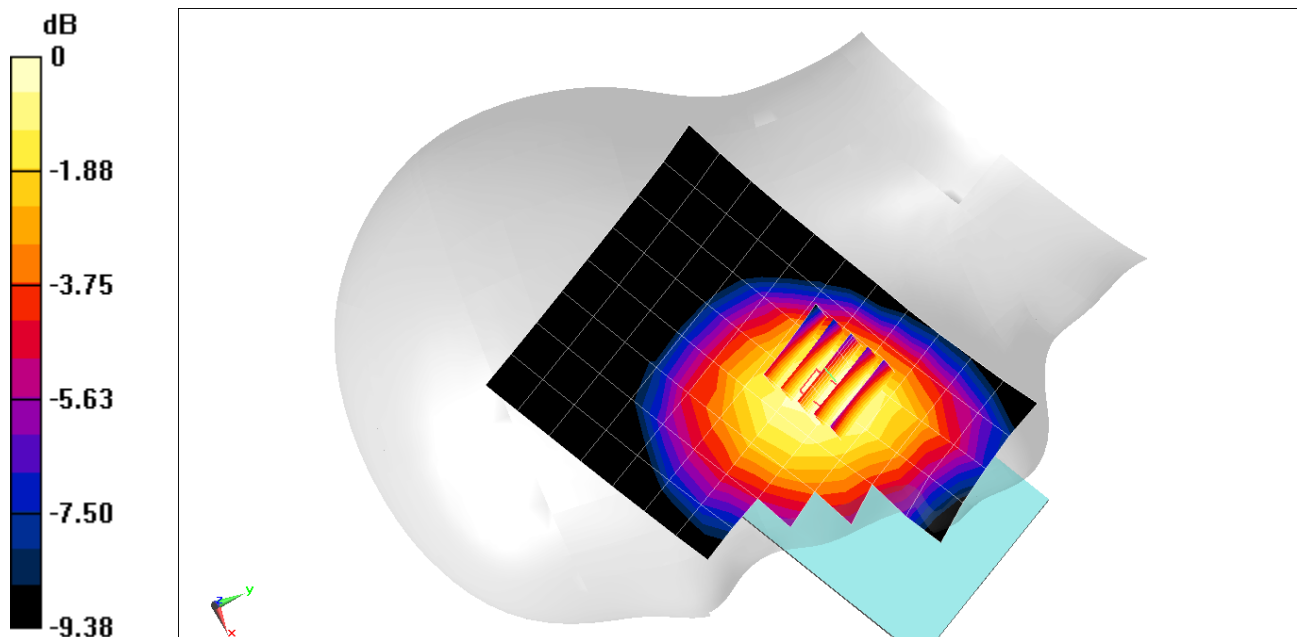

0 dB = 0.315 W/kg = -5.02 dBW/kg

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26895

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: 835 Head; Medium parameters used (interpolated):
 $f = 831.5$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 40.686$; $\rho = 1000$ kg/m³
Phantom section: Right Section

Test Date: 06/07/2023; Ambient Temp: 22.5°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7640; ConvF(10.56, 10.56, 10.56) @ 831.5 MHz; Calibrated: 2/10/2023
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1645; Calibrated: 2/16/2023
Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1937
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Mode: LTE Band 26 (Cell.), Antenna A, Right Head, Cheek, Mid.ch,
15 MHz Bandwidth, QPSK, 1 RB, 74 RB Offset**

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 16.84 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.294 W/kg

SAR(1 g) = 0.232 W/kg

Smallest distance from peaks to all points 3 dB below = 22.4 mm

Ratio of SAR at M2 to SAR at M1 = 78.7%

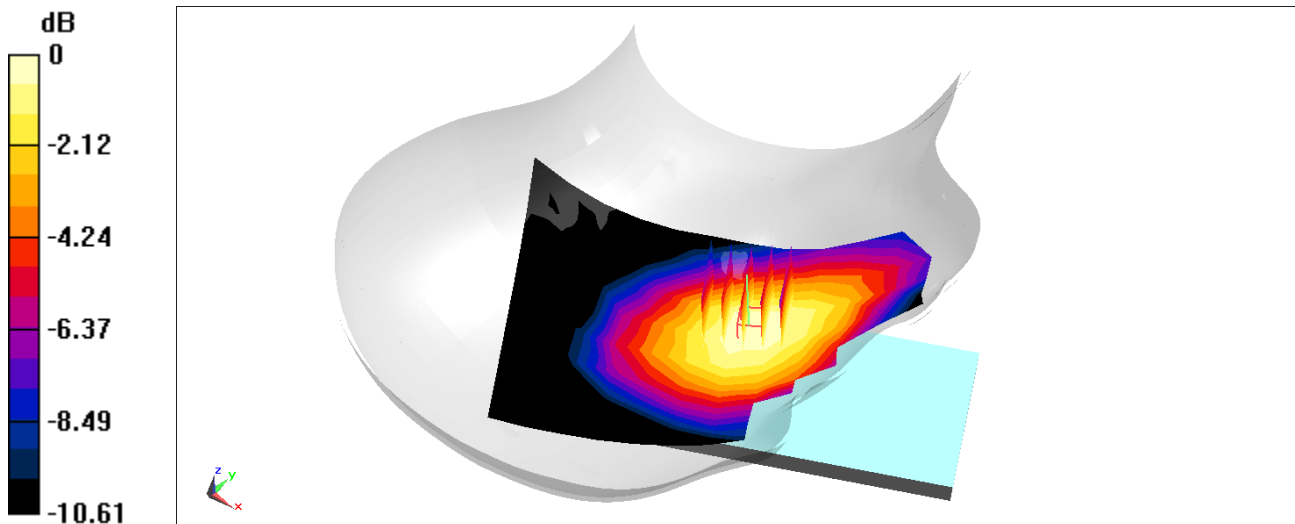

0 dB = 0.272 W/kg = -5.65 dBW/kg

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26523

Communication System: UID 0, LTE Band 5 (Cell.); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: 835 Head; Medium parameters used (interpolated):
 $f = 836.5$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 40.13$; $\rho = 1000$ kg/m³
Phantom section: Right Section;

Test Date: 06/20/2023; Ambient Temp: 22.4°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7637; ConvF(10.23, 10.23, 10.23) @ 836.5 MHz; Calibrated: 3/16/2023
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1652; Calibrated: 3/16/2023
Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Mode: LTE Band 5 (Cell.), Antenna A, Right Head, Cheek, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset**

Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 13.85 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.272 W/kg

SAR(1 g) = 0.216 W/kg

Smallest distance from peaks to all points 3 dB below = 23.3 mm

Ratio of SAR at M2 to SAR at M1 = 79.2%

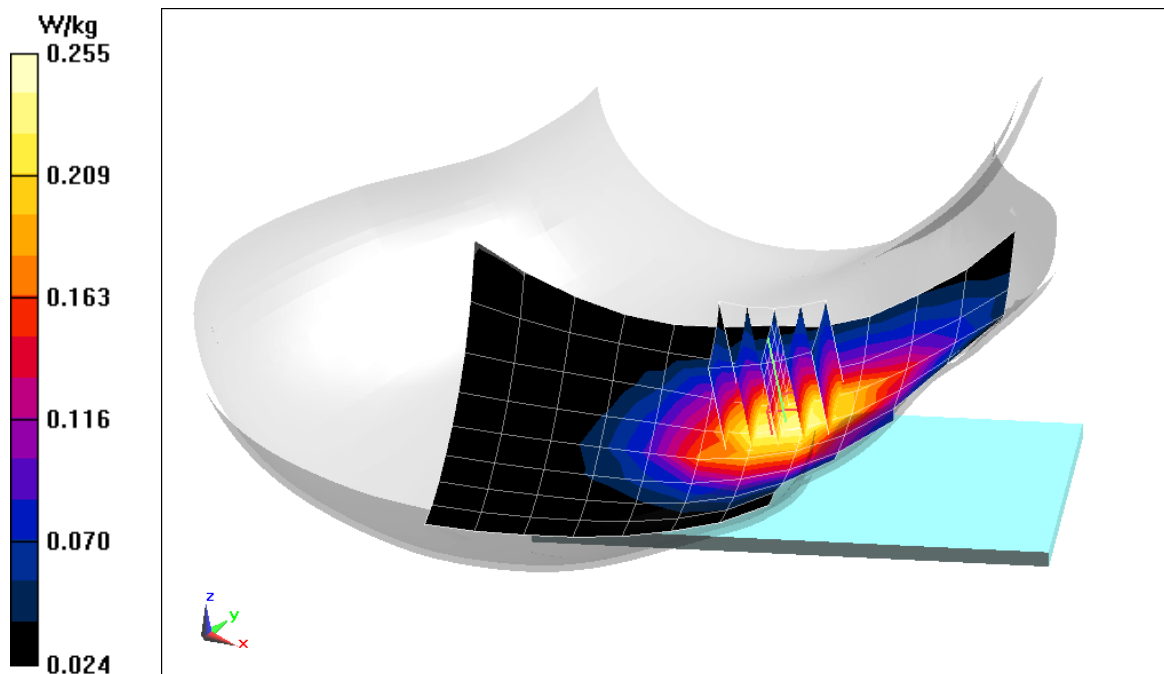

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26218

Communication System: UID:10154 - CAG, LTE-FDD; MAIA: Y; Frequency: 1715.0 MHz

Medium: 1750 Head; Medium parameters used:

f = 1715.0 MHz; cond = 1.35 S/m; perm = 39.2; density = 1000 kg/m³

Phantom Section: RightHead; Space: 0.00 mm

Test Date: 07/26/2023; Ambient Temp: 19.5°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7565; ConvF:(8.23,8.23,8.23); Calibrated: 2023-01-12

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1466; Calibrated: 2023-01-20

Phantom: Twin-SAM V5.0; Serial: 1868

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 66 (AWS), Antenna F, Right Head, Tilt, Low Ch.,
10 MHz Bandwidth, QPSK, 25 RB, 25 RB Offset**

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.45 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.505 W/kg

Smallest distance from peaks to all points 3 dB below is 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 78.5 %

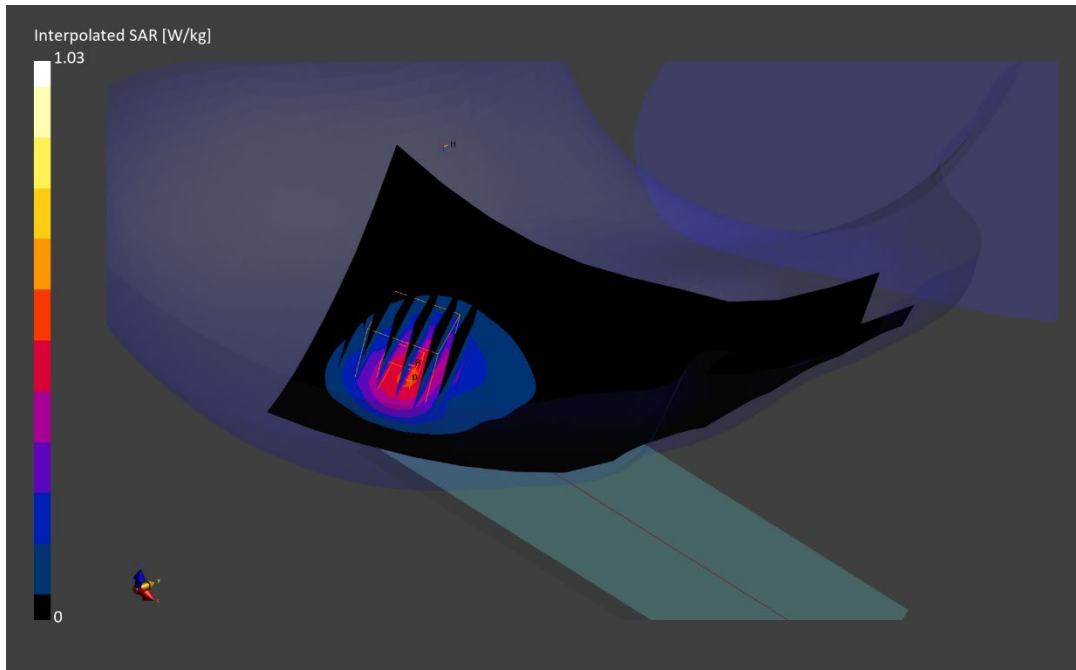

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26531

Communication System: UID:10297 - AAD, LTE-FDD; MAIA: Y; Frequency: 1882.5 MHz

Medium: 1900 Head; Medium parameters used:

f = 1882.5 MHz; cond = 1.39 S/m; perm = 39.1; density = 1000 kg/m³

Phantom Section: RightHead; Space: 0.00 mm

Test Date: 06/19/2023; Ambient Temp: 21.4°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7410; ConvF:(8.04,8.04,8.04); Calibrated: 2022-07-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1583; Calibrated: 2022-07-18

Phantom: Twin-SAM V8.0; Serial: 1630

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 25, Antenna F, Right Head, Tilt,
Mid Ch, 20 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset**

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (36.0 x 36.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.63 W/kg; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.574 W/kg

Smallest distance from peaks to all points 3 dB below is 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 81.2 %

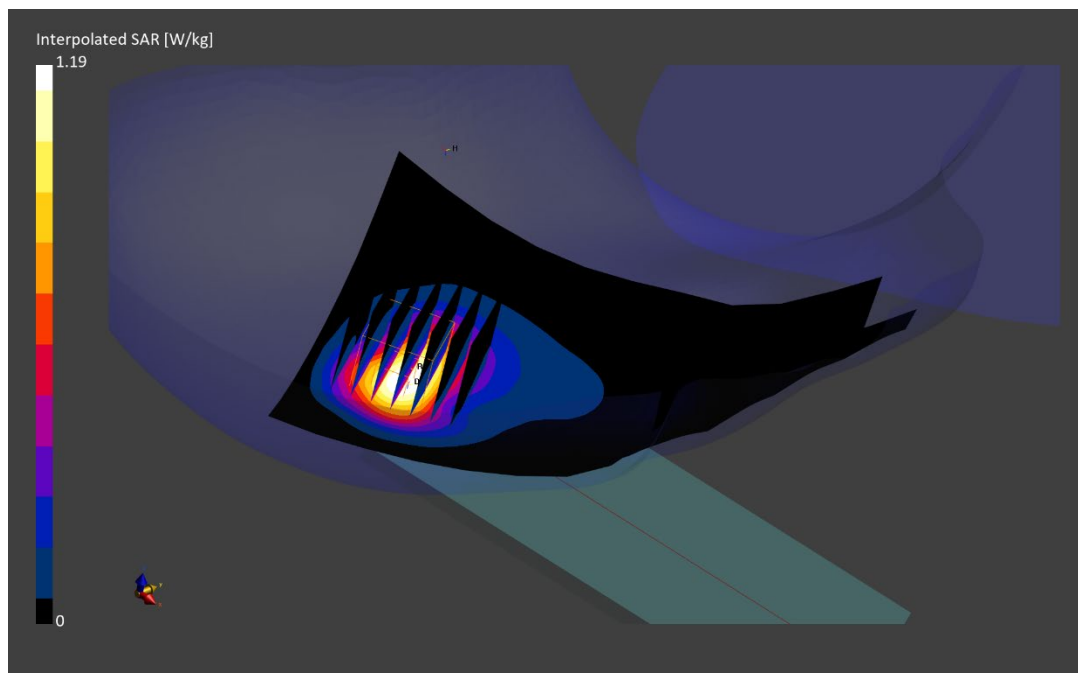

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26531

Communication System: UID:10175 - CAG, LTE-FDD; MAIA: Y; Frequency: 2310.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2310.0 MHz; cond = 1.74 S/m; perm = 38.9; density = 1000 kg/m³

Phantom Section: RightHead; Space: 0.00 mm

Test Date: 07/12/2023; Ambient Temp: 24.6°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7570; ConvF:(7.95,7.95,7.95); Calibrated: 2023-01-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1558; Calibrated: 2023-01-17

Phantom: Twin-SAM V8.0; Serial: 2060

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 30, Antenna F, Right Head, Tilt, Mid Ch.,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.42 W/kg; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.427 W/kg

Smallest distance from peaks to all points 3 dB below is 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 75.7 %

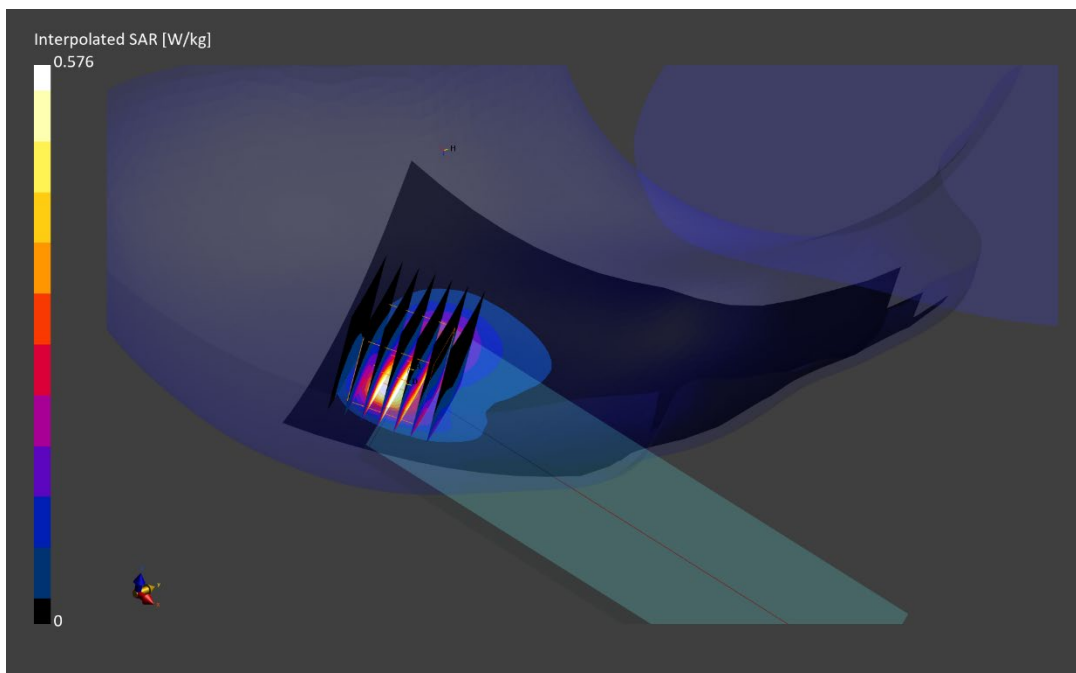

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26747

Communication System: UID:10297 - AAD, LTE-FDD; MAIA: Y; Frequency: 2560.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2560.0 MHz; cond = 1.92 S/m; perm = 37.6; density = 1000 kg/m³

Phantom Section: RightHead; Space: 0.00 mm

Test Date: 07/24/2023; Ambient Temp: 19.9°C; Tissue Temp: 19.9°C

Probe: EX3DV4 - SN7565; ConvF:(6.89,6.89,6.89); Calibrated: 2023-01-12

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1466; Calibrated: 2023-01-20

Phantom: Twin-SAM V5.0; Serial: 1868

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 7, Antenna F, Right Head, Cheek, High Ch,
20 MHz Bandwidth, QPSK, 50 RB, 50 RB Offset**

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.52 W/kg; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.554 W/kg

Smallest distance from peaks to all points 3 dB below is 5.9 mm

Ratio of SAR at M2 to SAR at M1 = 75.5 %

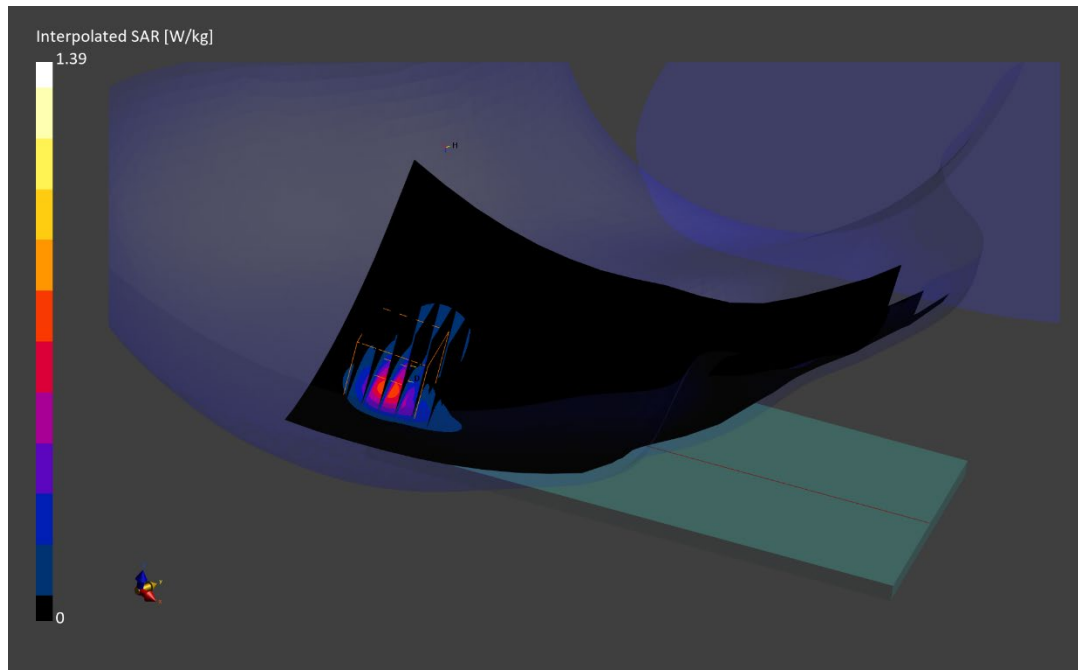

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26424

Communication System: UID:10172 - CAG, LTE-TDD; MAIA: Y; Frequency: 2593.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2593.0 MHz; cond = 1.95 S/m; perm = 37.6; density = 1000 kg/m³

Phantom Section: RightHead; Space: 0.00 mm

Test Date: 07/24/2023; Ambient Temp: 19.9°C; Tissue Temp: 19.9°C

Probe: EX3DV4 - SN7565; ConvF:(6.89,6.89,6.89); Calibrated: 2023-01-12

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1466; Calibrated: 2023-01-20

Phantom: Twin-SAM V5.0; Serial: 1868

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: LTE Band 41, HPUE, ULCA_41C, Antenna F, Right Head, Tilt,

PCC: Ch.40620, 20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset

SCC: Ch.40422, 20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=4.8 mm, dy=4.8 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.62 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.683 W/kg

Smallest distance from peaks to all points 3 dB below is 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 75.9 %

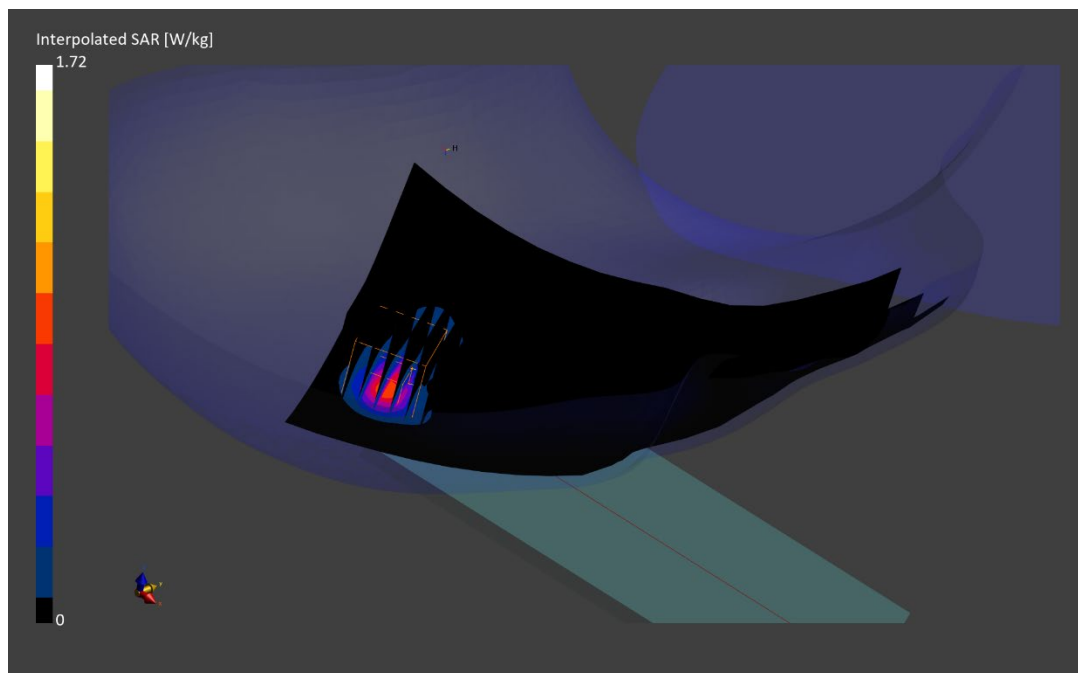

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 25913

Communication System: UID:10494 - AAF, LTE-TDD; MAIA: Y; Frequency: 3690.0 MHz

Medium: 3600 Head; Medium parameters used:

f = 3690.0 MHz; cond = 2.98 S/m; perm = 37.5; density = 1000 kg/m³

Phantom Section: RightHead; Space: 0.00 mm

Test Date: 06/12/2023; Ambient Temp: 22.0°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7406; ConvF:(7.02,7.02,7.02); Calibrated: 2022-07-18

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1677; Calibrated: 2022-07-18

Phantom: Twin-SAM V8.0; Serial: 2064

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 48, Antenna F, Right Head, Tilt, High Ch.,
20 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset**

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=3.6 mm, dy=3.6 mm, dz=1.4 mm; Graded Ratio: 1.4


Reference Value = 0.42 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.418 W/kg

Smallest distance from peaks to all points 3 dB below is 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 71.3 %

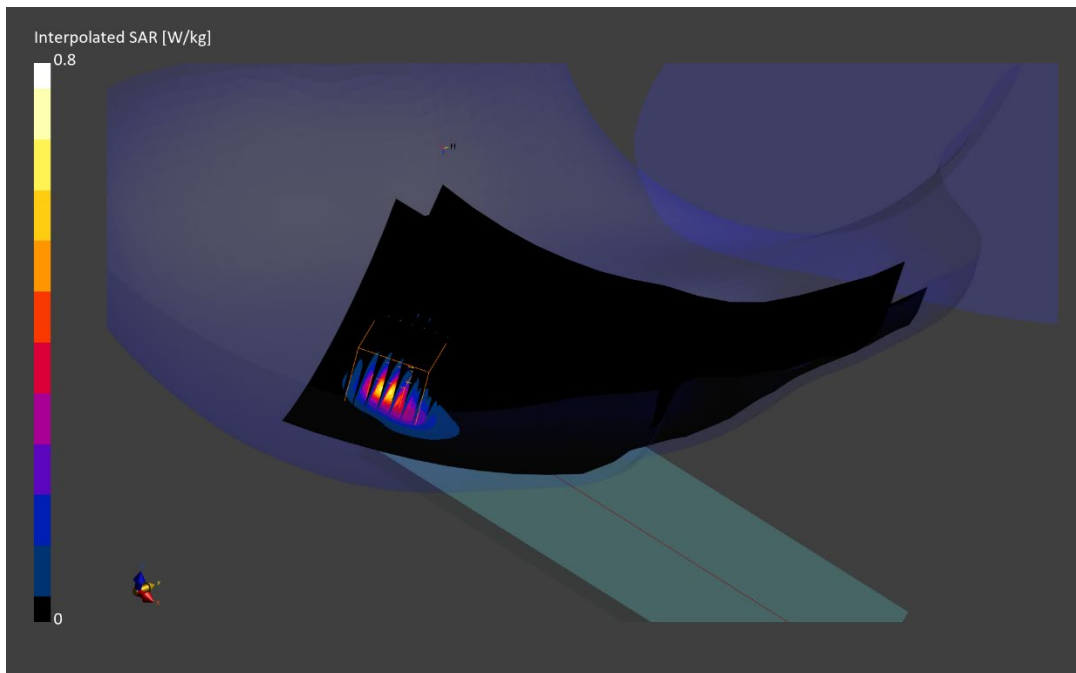

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26192

Communication System: UID 0, NR Band n71; Frequency: 680.5 MHz; Duty Cycle: 1:1
Medium: 750 Head; Medium parameters used (interpolated):
 $f = 680.5$ MHz; $\sigma = 0.851$ S/m; $\epsilon_r = 41.89$; $\rho = 1000$ kg/m³
Phantom section: Right Section

Test Date: 06/12/2023; Ambient Temp: 21.2°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7637; ConvF(10.29, 10.29, 10.29) @ 680.5 MHz; Calibrated: 3/16/2023
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1652; Calibrated: 3/16/2023
Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Mode: NR Band n71, Antenna A, Right Head, Cheek, 20 MHz Bandwidth,
DFT-s-OFDM QPSK, Ch. 136100, 50 RB, 28 RB Offset**

Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 13.87 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.188 W/kg

SAR(1 g) = 0.161 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 87.1%

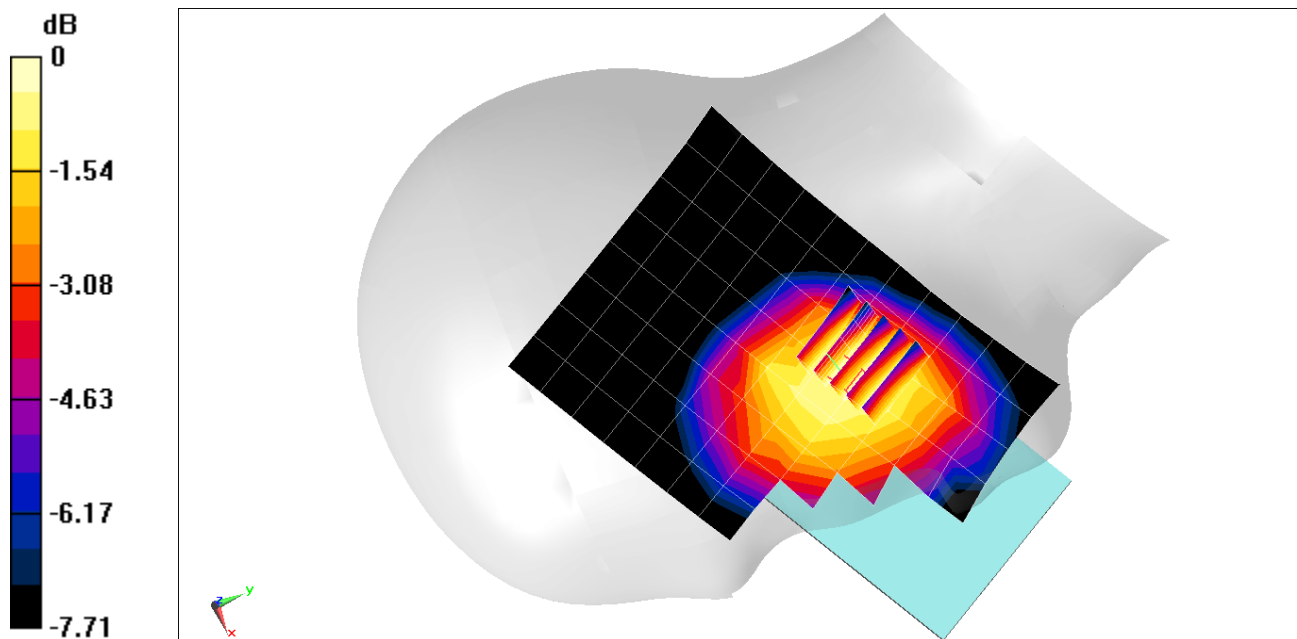

0 dB = 0.178 W/kg = -7.50 dBW/kg

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26192

Communication System: UID 0, NR Band n12; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: 750 Head; Medium parameters used (interpolated):
 $f = 707.5$ MHz; $\sigma = 0.859$ S/m; $\epsilon_r = 41.805$; $\rho = 1000$ kg/m³
Phantom section: Right Section

Test Date: 06/12/2023; Ambient Temp: 21.2°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7637; ConvF(10.29, 10.29, 10.29) @ 707.5 MHz; Calibrated: 3/16/2023
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1652; Calibrated: 3/16/2023
Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596
Measurement SW: DASYS2, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Mode: NR Band n12, Antenna A, Right Head, Cheek, 15 MHz Bandwidth,
DFT-s-OFDM QPSK, Ch. 141500, 36 RB, 22 RB Offset**

Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 15.51 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.227 W/kg

SAR(1 g) = 0.196 W/kg

Smallest distance from peaks to all points 3 dB below = 25.4 mm

Ratio of SAR at M2 to SAR at M1 = 87.5%

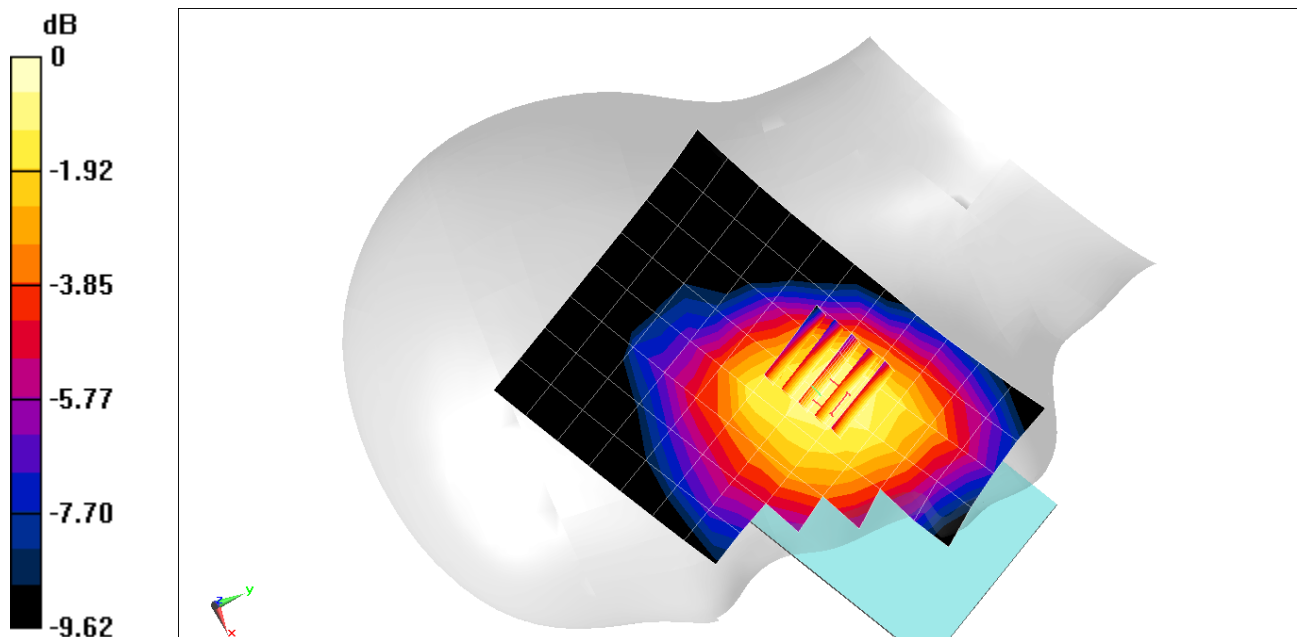

0 dB = 0.216 W/kg = -6.66 dBW/kg

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26374

Communication System: UID:10931 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 831.5 MHz

Medium: 835 Head; Medium parameters used:

f = 831.5 MHz; cond = 0.885 S/m; perm = 41.7; density = 1000 kg/m³

Phantom Section: RightHead; Space: 0.00 mm

Test Date: 06/15/2023; Ambient Temp: 22.3°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7713; ConvF:(10.17,10.17,10.17); Calibrated: 2023-01-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1530; Calibrated: 2023-01-18

Phantom: Twin-SAM V8.0; Serial: 2065

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: NR Band n26, Antenna A, Right Head, Cheek, Ch. 166300,
20 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 104 RB Offset**

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.19 W/kg; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.224 W/kg

SAR(1 g) = 0.182 W/kg

Smallest distance from peaks to all points 3 dB below is 27.7 mm

Ratio of SAR at M2 to SAR at M1 = 95.5 %

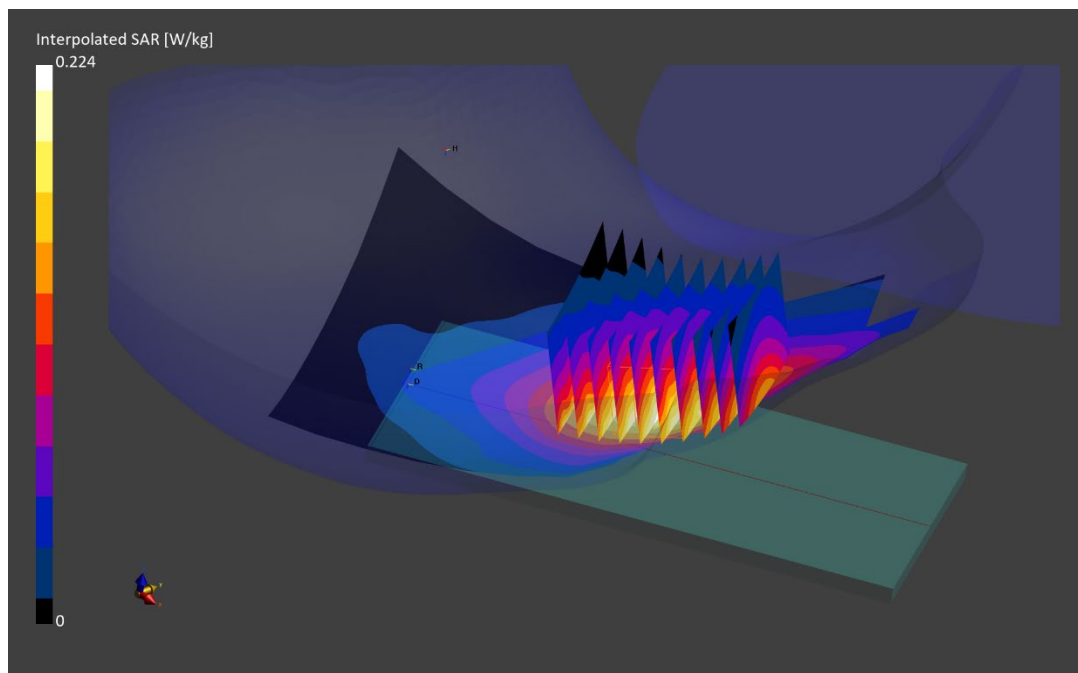

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 37611

Communication System: UID:10773 - AAD, CW; MAIA: Y; Frequency: 1745.0 MHz
Medium: 1750 Head; Medium parameters used:
f = 1745.0 MHz; cond = 1.38 S/m; perm = 39.3; density = 1000 kg/m³
Phantom Section: RightHead; Space: 0.00 mm

Test Date: 07/23/2023; Ambient Temp: 22.5°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7551; ConvF:(8.53,8.53,8.53); Calibrated: 2022-11-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1323; Calibrated: 2022-11-10
Phantom: Twin-SAM V8.0; Serial: 2057
Measurement SW: DASY Module SAR V16.2.0.1425

Mode: NR Band n66, Right Head, Tilt, Ch. 349000
40 MHz Bandwidth, CP-OFDM QPSK, 1 RB, 1 RB Offset

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.60 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.623 W/kg

Smallest distance from peaks to all points 3 dB below is 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 79.5 %

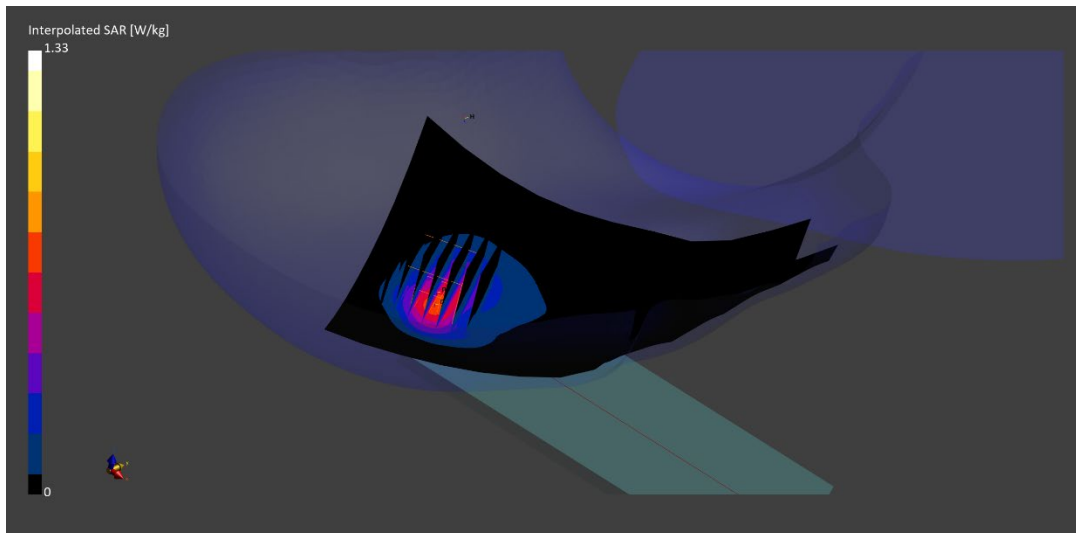

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 37520

Communication System: UID:10773 - AAD, CW; MAIA: Y; Frequency: 1882.5 MHz
Medium: 1900 Head; Medium parameters used:
f = 1882.5 MHz; cond = 1.37 S/m; perm = 41.0; density = 1000 kg/m³
Phantom Section: RightHead; Space: 0.00 mm

Test Date: 07/24/2023; Ambient Temp: 20.8°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN7409; ConvF:(8.2,8.2,8.2); Calibrated: 2023-06-15
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1334; Calibrated: 2023-06-15
Phantom: Twin-SAM V8.0; Serial: 1630
Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: NR Band n25, Antenna F, Right Head, Tilt, 40 MHz Bandwidth,
Ch. 376500, CP-OFDM QPSK, 1 RB, 1 RB Offset**

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.9 mm, dy=5.9 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.62 W/kg; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.585 W/kg

Smallest distance from peaks to all points 3 dB below is 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 74.2 %

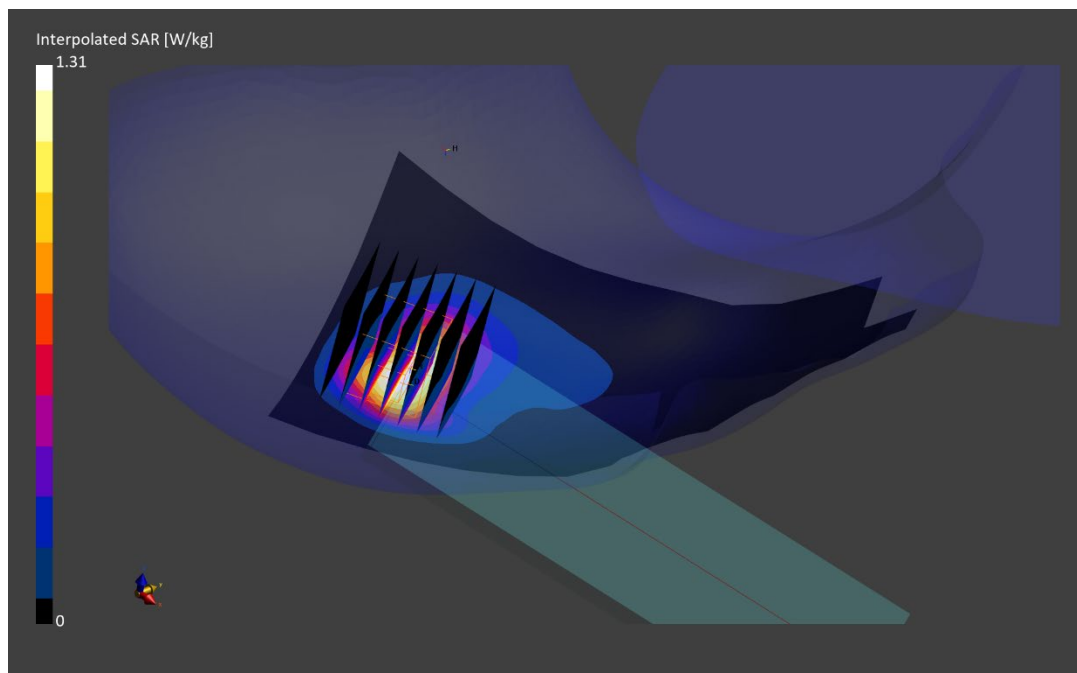

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26549

Communication System: UID:10768 - AAD, CW; MAIA: Y; Frequency: 2310.0 MHz
Medium: 2450 Head; Medium parameters used:
f = 2310.0 MHz; cond = 1.73 S/m; perm = 39.8; density = 1000 kg/m³
Phantom Section: RightHead; Space: 0.00 mm

Test Date: 07/17/2023; Ambient Temp: 21.3°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7713; ConvF:(8.53,8.53,8.53); Calibrated: 2023-01-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1530; Calibrated: 2023-01-18
Phantom: Twin-SAM V8.0; Serial: 2065
Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: NR Band n30, Antenna F, Right Head, Tilt, Ch. 462000,
10 MHz Bandwidth, CP-OFDM QPSK, 1 RB, 1 RB Offset**

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.54 W/kg; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.539 W/kg

Smallest distance from peaks to all points 3 dB below is 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 74.8 %

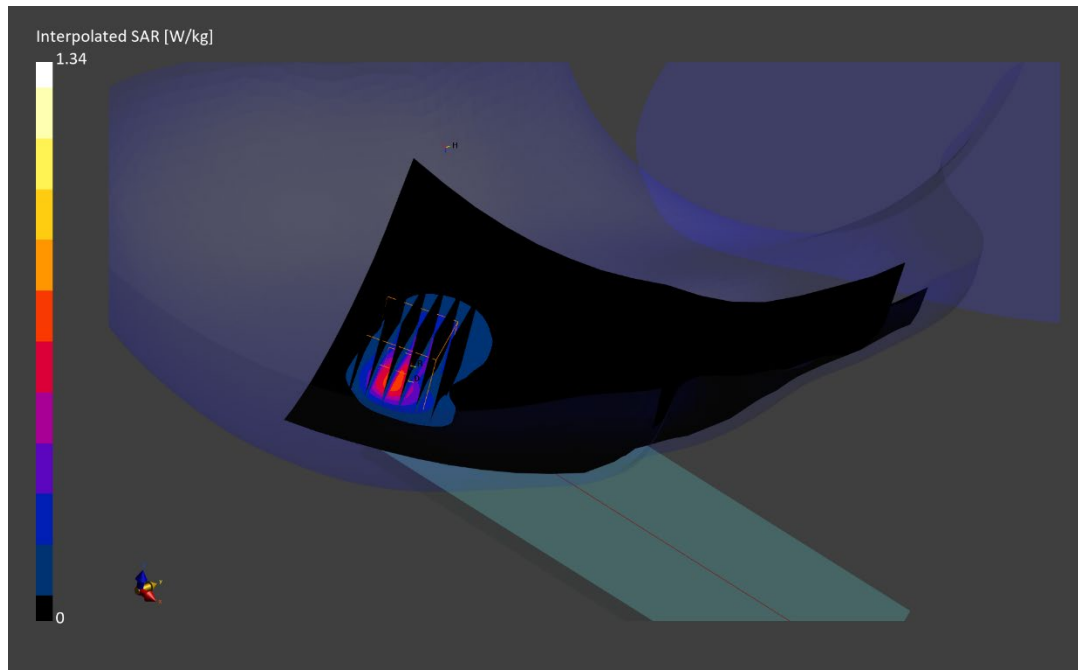

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 37306

Communication System: UID:0 - -, CW; MAIA: Y; Frequency: 2593.0 MHz
Medium: 2450 Head; Medium parameters used:
f = 2593.0 MHz; cond = 1.90 S/m; perm = 38.3; density = 1000 kg/m³
Phantom Section: RightHead; Space: 0.00 mm

Test Date: 07/24/2023; Ambient Temp: 21.1°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7570; ConvF:(7.26,7.26,7.26); Calibrated: 2023-01-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1558; Calibrated: 2023-01-17
Phantom: Twin-SAM V8.0; Serial: 2060
Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: NR Band n41, Antenna F, Right Head, Tilt, Ch.518598,
100 MHz Bandwidth, CW/SRS**

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=4.4 mm, dy=4.4 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.59 W/kg; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 0.653 W/kg

Smallest distance from peaks to all points 3 dB below is 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 76.5 %

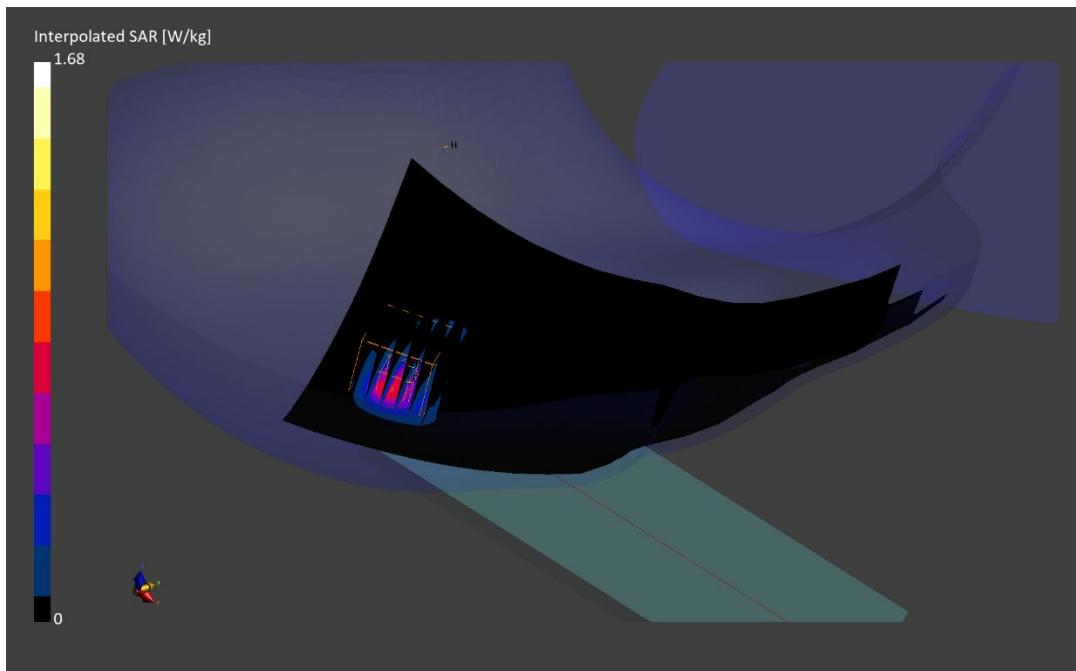

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26366

Communication System: UID:10797 - AAD, 5G NR FR1 TDD; MAIA: Y; Frequency: 3680.0 MHz

Medium: 3600 Head; Medium parameters used:

f = 3680.0 MHz; cond = 2.96 S/m; perm = 36.4; density = 1000 kg/m³

Phantom Section: RightHead; Space: 0.00 mm

Test Date: 06/19/2023; Ambient Temp: 19.9°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7638; ConvF:(6.99,6.99,6.99); Calibrated: 2023-03-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1408; Calibrated: 2023-03-13

Phantom: Twin-SAM V8.0; Serial: 1357

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: NR Band n48, Antenna F, Right Head, Tilt, Ch. 645332,
40 MHz Bandwidth, CP-OFDM QPSK, 1 RB, 1 RB Offset**

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=4.5 mm, dy=4.5 mm, dz=1.4 mm; Graded Ratio: 1.5


Reference Value = 0.81 W/kg; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.513 W/kg

Smallest distance from peaks to all points 3 dB below is 5.9 mm

Ratio of SAR at M2 to SAR at M1 = 69.7 %

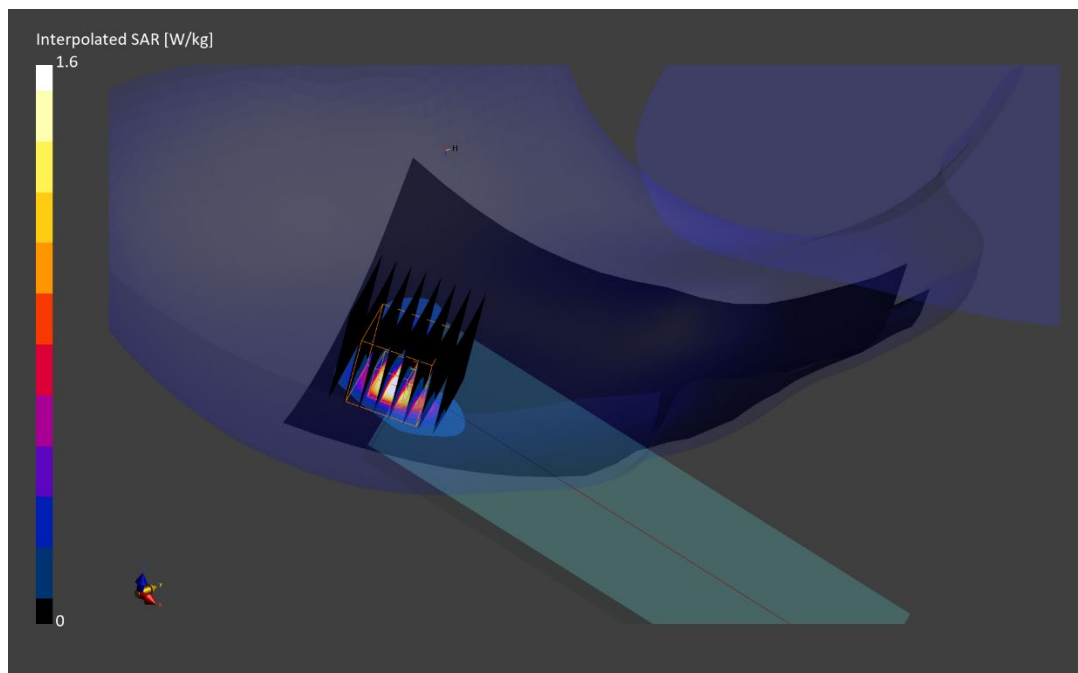

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26366

Communication System: UID:0 - -, CW; MAIA: Y; Frequency: 3500.0 MHz
Medium: 3600 Head; Medium parameters used:
f = 3500.0 MHz; cond = 2.79 S/m; perm = 37.3; density = 1000 kg/m³
Phantom Section: RightHead; Space: 0.00 mm

Test Date: 07/04/2023; Ambient Temp: 20.5°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7638; ConvF:(7.02,7.02,7.02); Calibrated: 2023-03-16
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1408; Calibrated: 2023-03-13
Phantom: Twin-SAM V8.0; Serial: 1357
Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: NR Band n77 DoD, Antenna I, Right Head, Cheek,
Ch. 633334, 100 MHz Bandwidth, CW/SRS**

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4


Reference Value = 0.91 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.525 W/kg

Smallest distance from peaks to all points 3 dB below is 5.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.1 %

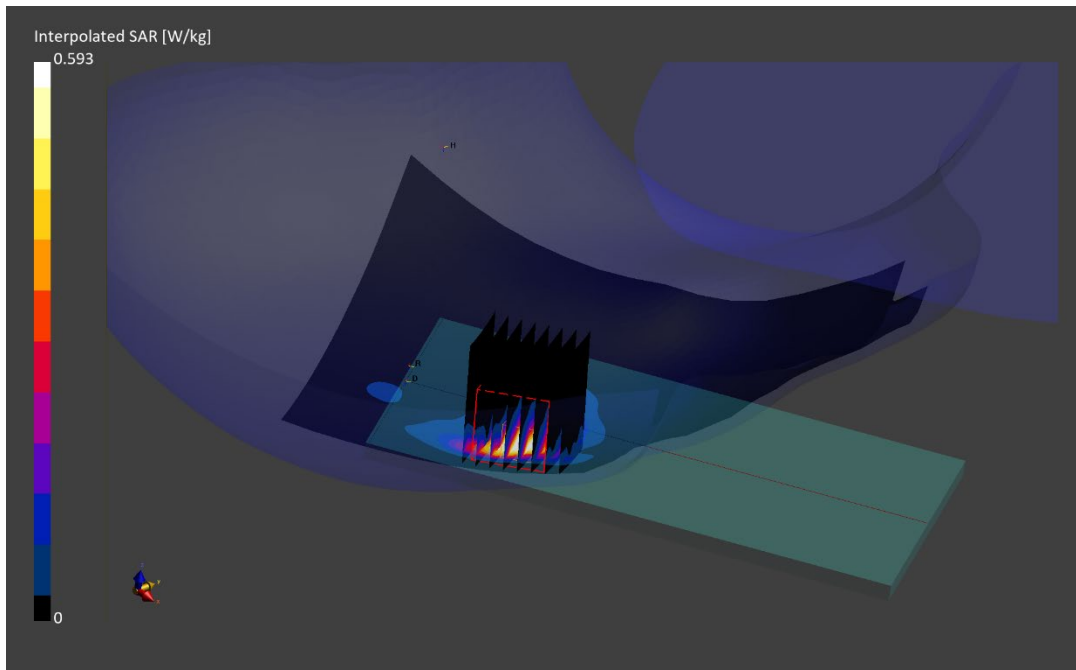

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 29519

Communication System: UID:10196 - CAD, WLAN; MAIA: Y; Frequency: 2462.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2462.0 MHz; cond = 1.86 S/m; perm = 38.6; density = 1000 kg/m³

Phantom Section: LeftHead; Space: 0.00 mm

Test Date: 07/12/2023; Ambient Temp: 24.6°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7570; ConvF:(7.55,7.55,7.55); Calibrated: 2023-01-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1558; Calibrated: 2023-01-17

Phantom: Twin-SAM V8.0; Serial: 2060

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: IEEE 802.11n, MIMO, 20 MHz Bandwidth, Left Head, Cheek, Ch.11, 13 Mbps

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.45 W/kg; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.844 W/kg

SAR(1 g) = 0.429 W/kg

Smallest distance from peaks to all points 3 dB below is 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 94.2 %

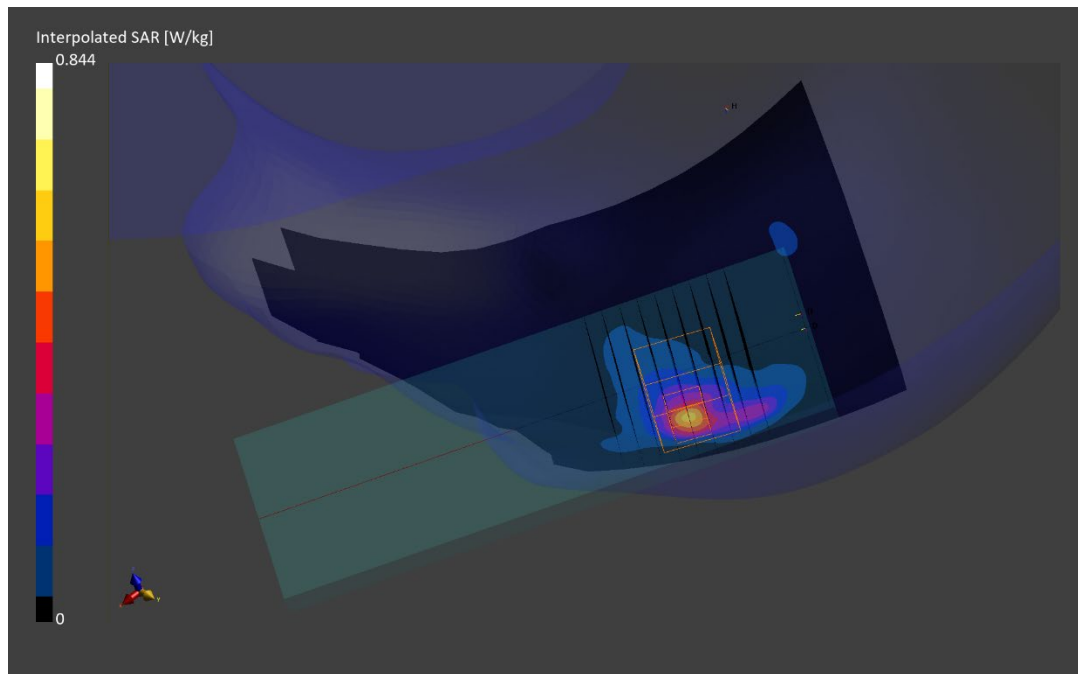

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 29279

Communication System: UID:10626 - AAC, CW; MAIA: Y; Frequency: 5855.0 MHz
Medium: 5200-5800 Head; Medium parameters used:
f = 5855.0 MHz; cond = 5.32 S/m; perm = 34.3; density = 1000 kg/m³
Phantom Section: RightHead; Space: 0.00 mm

Test Date: 07/17/2023; Ambient Temp: 22.3°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN7417; ConvF:(4.88,4.88,4.88); Calibrated: 2023-02-08
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn665; Calibrated: 2023-02-15
Phantom: Twin-SAM V5.0; Serial: 1757
Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: IEEE 802.11ac, U-NII-4, MIMO, 80 MHz Bandwidth,
Right Head, Cheek, Ch. 171, 58.5 Mbps**

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (24.0 x 24.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4


Reference Value = 0.32 W/kg; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.211 W/kg

Smallest distance from peaks to all points 3 dB below is 4.4 mm

Ratio of SAR at M2 to SAR at M1 = 51.7 %

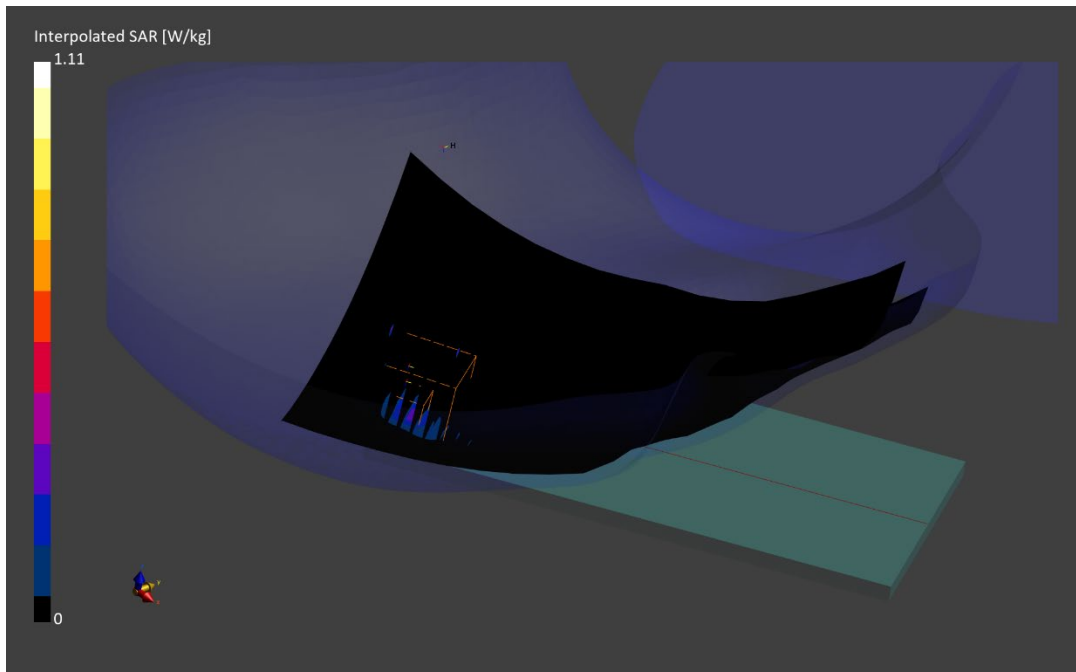

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 29352

Communication System: UID:10032 - CAA, Bluetooth; MAIA: Y; Frequency: 2441.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2441.0 MHz; cond = 1.85 S/m; perm = 39.4; density = 1000 kg/m³

Phantom Section: RightHead; Space: 0.00 mm

Test Date: 7/21/2023; Ambient Temp: 22.1°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7713; ConvF:(8.26,8.26,8.26); Calibrated: 2023-01-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1530; Calibrated: 2023-01-18

Phantom: Twin-SAM V8.0; Serial: 2065

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: Bluetooth, Antenna 1, Right Head, Cheek, Ch. 39, 1 Mbps

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.15 W/kg; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.381 W/kg

SAR(1 g) = 0.148 W/kg

Smallest distance from peaks to all points 3 dB below is 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 73.6 %

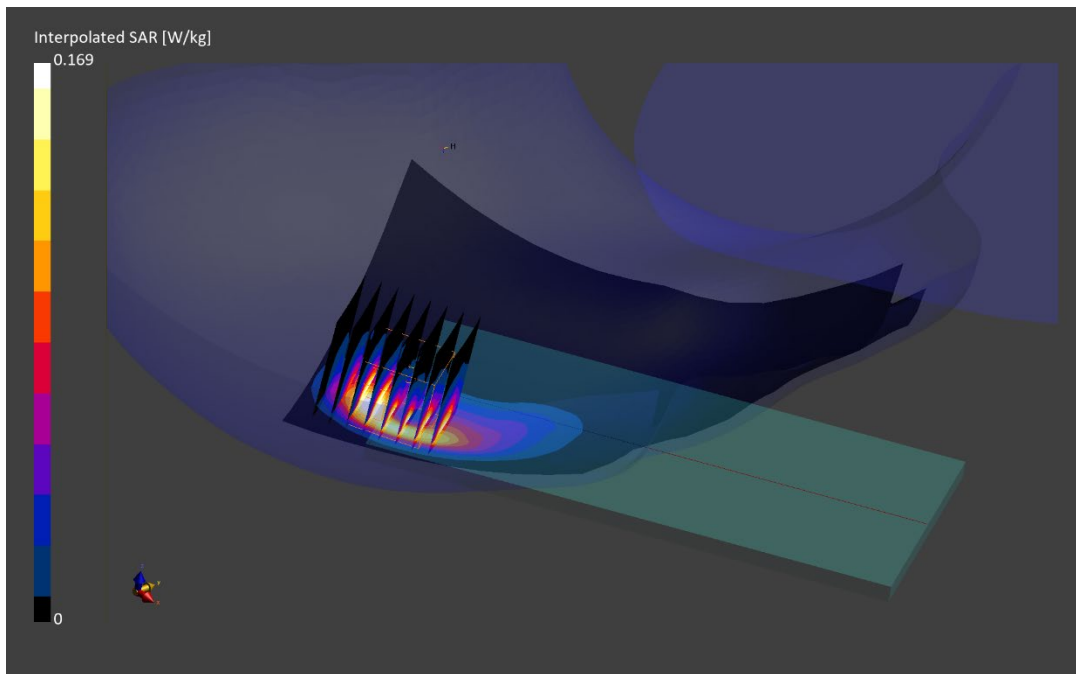

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26895


Communication System: UID 0, GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3
Medium: 835 Head; Medium parameters used (interpolated):
 $f = 848.8$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 39.989$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/12/2023; Ambient Temp: 22.4°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7640; ConvF(10.56, 10.56, 10.56) @ 848.8 MHz; Calibrated: 2/10/2023
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1645; Calibrated: 2/16/2023
Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1937
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Mode: GSM 850, Antenna A, Body SAR, Back side, High.ch

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 19.16 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.488 W/kg
SAR(1 g) = 0.304 W/kg
Smallest distance from peaks to all points 3 dB below = 13.6 mm
Ratio of SAR at M2 to SAR at M1 = 62.7%

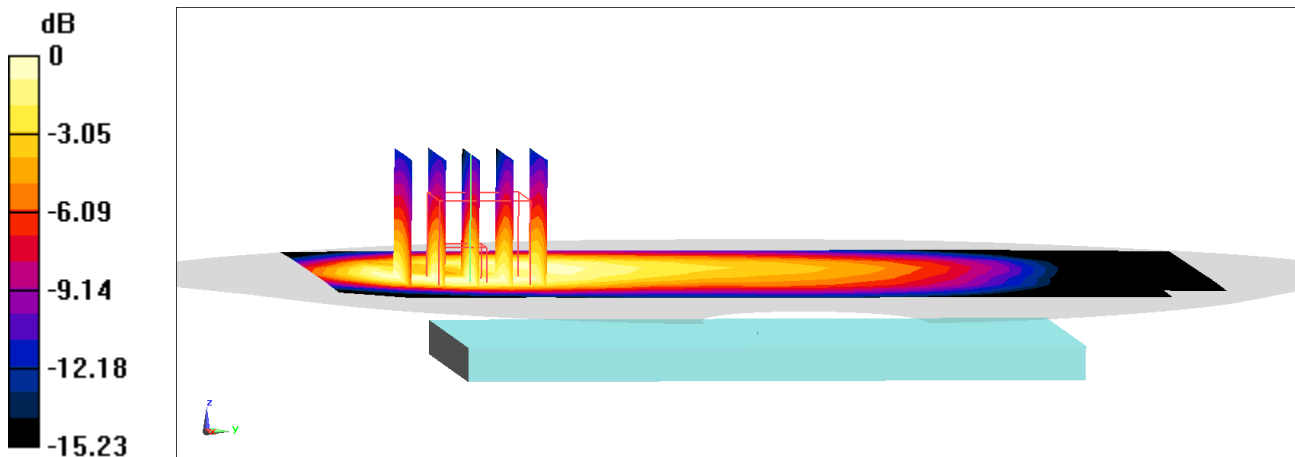

0 dB = 0.418 W/kg = -3.79 dBW/kg

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26655

Communication System: UID:10021 - DAC, GSM; MAIA: Y; Frequency: 1880.0 MHz

Medium: 1900 Head; Medium parameters used:

f = 1880.0 MHz; cond = 1.38 S/m; perm = 40.5; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/14/2023; Ambient Temp: 22.3°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7547; ConvF:(7.81,7.81,7.81); Calibrated: 2022-10-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1322; Calibrated: 2022-10-17

Phantom: Twin-SAM V8.0; Serial: 1934

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: GSM 1900, Antenna A, Body SAR, Back Side, Mid Ch.

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.14 W/kg; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.206 W/kg

SAR(1 g) = 0.125 W/kg

Smallest distance from peaks to all points 3 dB below is 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 85.3 %

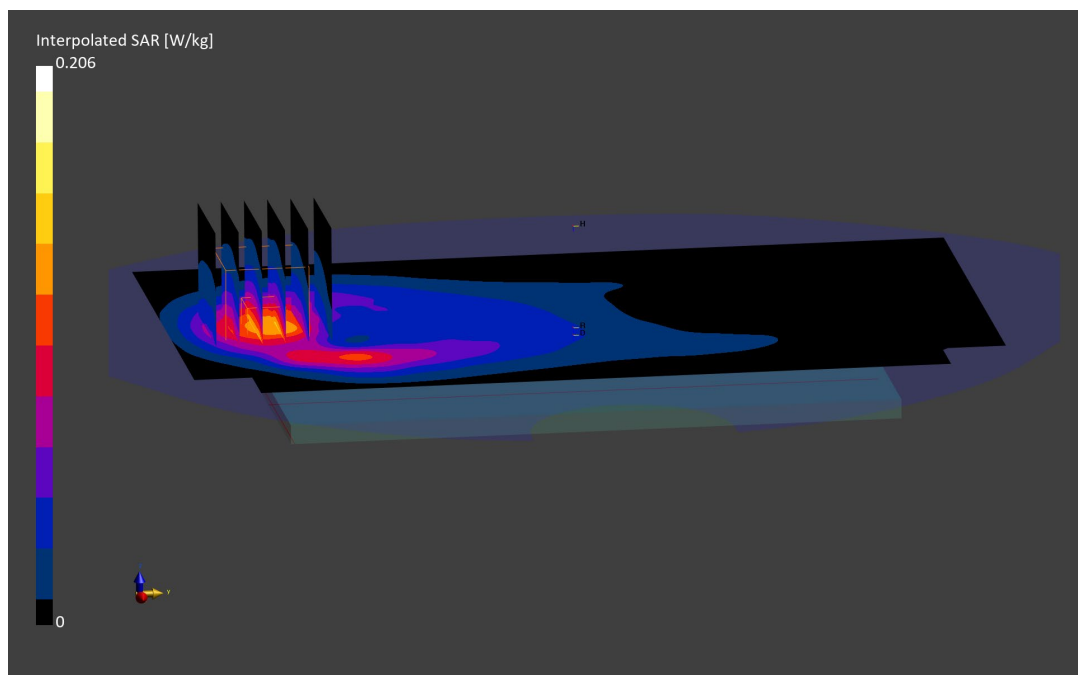

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26895

Communication System: UID 0, UMTS; Frequency: 846.6 MHz; Duty Cycle: 1:1
Medium: 835 Head; Medium parameters used (interpolated):
 $f = 846.6$ MHz; $\sigma = 0.893$ S/m; $\epsilon_r = 39.587$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/14/2023; Ambient Temp: 21.1°C; Tissue Temp: 20.9°C

Probe: EX3DV4 - SN7640; ConvF(10.56, 10.56, 10.56) @ 846.6 MHz; Calibrated: 2/10/2023
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1645; Calibrated: 2/16/2023
Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1937
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Mode: UMTS 850, Antenna A, Body SAR, Back side, High.ch

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 23.50 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.739 W/kg

SAR(1 g) = 0.459 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 61.5%

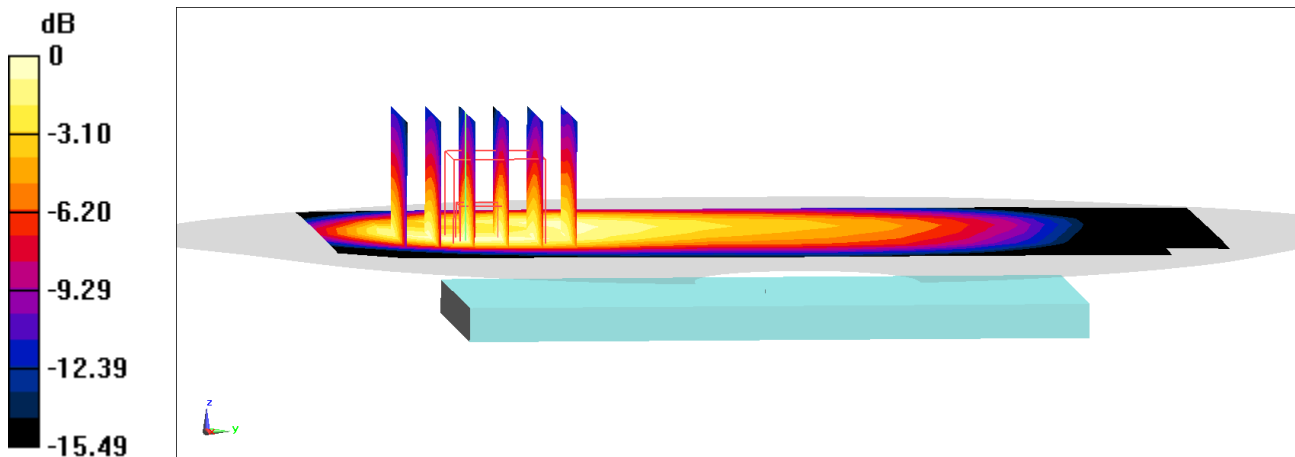

0 dB = 0.638 W/kg = -1.95 dBW/kg

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26655

Communication System: UID:10011 - CAB, WCDMA; MAIA: Y; Frequency: 1752.6 MHz

Medium: 1750 Head; Medium parameters used:

f = 1752.6 MHz; cond = 1.31 S/m; perm = 41.7; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/12/2023; Ambient Temp: 22.5°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7547; ConvF:(8.16,8.16,8.16); Calibrated: 2022-10-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1322; Calibrated: 2022-10-17

Phantom: Twin-SAM V8.0; Serial: 1934

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: UMTS 1750, Antenna A, Body SAR, Back Side, High Ch.

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.48 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.795 W/kg

SAR(1 g) = 0.478 W/kg

Smallest distance from peaks to all points 3 dB below is 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 85.2 %

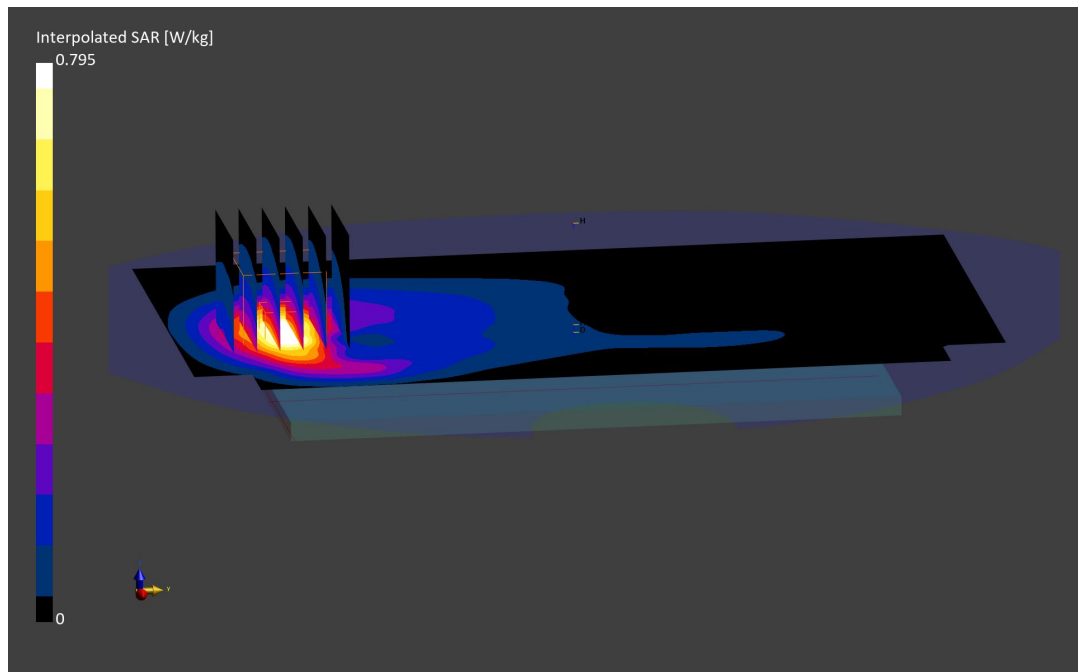

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26655

Communication System: UID:10011 - CAB, WCDMA; MAIA: Y; Frequency: 1852.4 MHz

Medium: 1900 Head; Medium parameters used:

f = 1852.4 MHz; cond = 1.36 S/m; perm = 40.5; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/14/2023; Ambient Temp: 22.3°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7547; ConvF:(7.81,7.81,7.81); Calibrated: 2022-10-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1322; Calibrated: 2022-10-17

Phantom: Twin-SAM V8.0; Serial: 1934

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: UMTS 1900, Antenna A, Body SAR, Back Side, Low Ch.

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.18 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.291 W/kg

SAR(1 g) = 0.176 W/kg

Smallest distance from peaks to all points 3 dB below is 11.4 mm

Ratio of SAR at M2 to SAR at M1 = 86.1 %

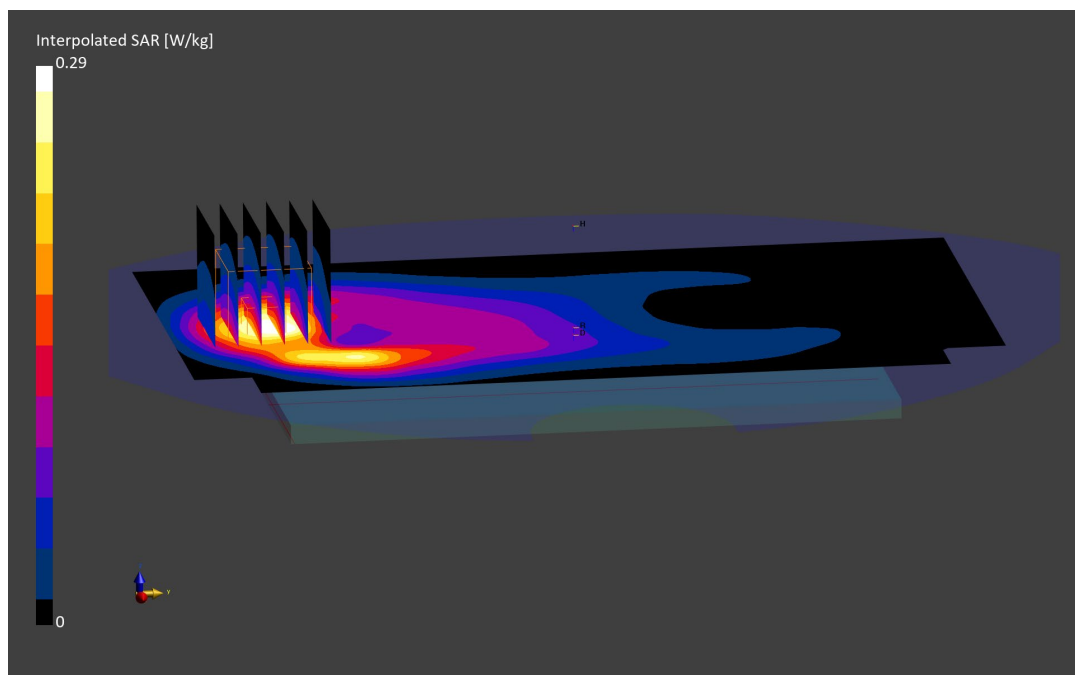

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 25764

Communication System: UID 0, LTE Band 71; Frequency: 680.5 MHz; Duty Cycle: 1:1
Medium: 750 Head; Medium parameters used (interpolated):
 $f = 680.5$ MHz; $\sigma = 0.864$ S/m; $\epsilon_r = 42.924$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/19/2023; Ambient Temp: 22.1°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7640; ConvF(10.91, 10.91, 10.91) @ 680.5 MHz; Calibrated: 2/10/2023
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1645; Calibrated: 2/16/2023
Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1937
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Mode: LTE Band 71, Antenna A, Body SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 20.98 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.601 W/kg

SAR(1 g) = 0.359 W/kg

Smallest distance from peaks to all points 3 dB below = 17 mm

Ratio of SAR at M2 to SAR at M1 = 57.7%

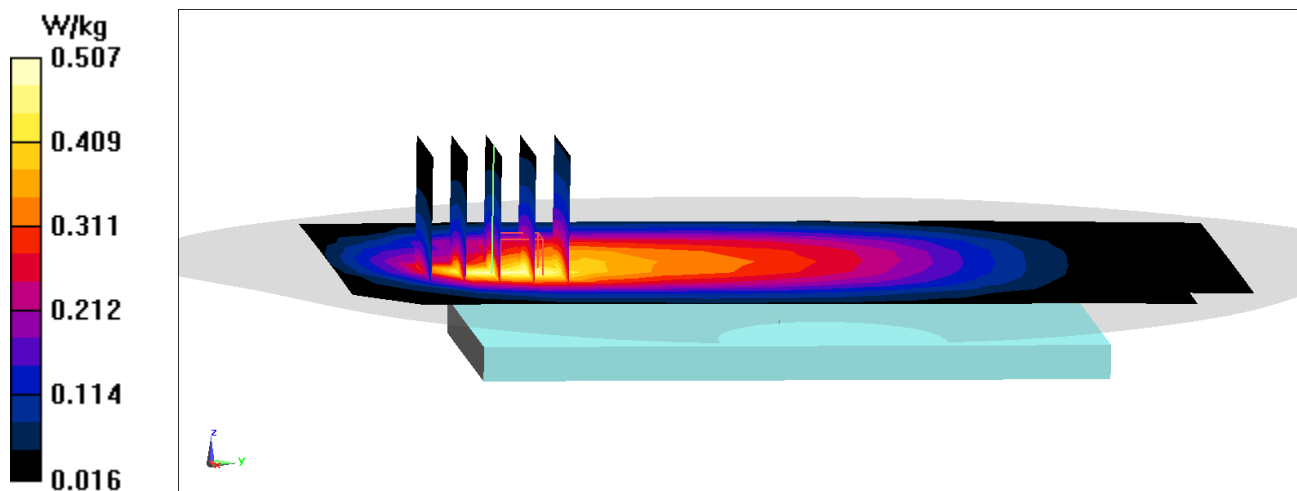

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 25764

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: 750 Head; Medium parameters used (interpolated):
 $f = 707.5$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 42.866$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/19/2023; Ambient Temp: 22.1°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7640; ConvF(10.91, 10.91, 10.91) @ 707.5 MHz; Calibrated: 2/10/2023
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1645; Calibrated: 2/16/2023
Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1937
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Mode: LTE Band 12, Antenna A, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**

Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 23.89 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.752 W/kg

SAR(1 g) = 0.466 W/kg

Smallest distance from peaks to all points 3 dB below = 16.1 mm

Ratio of SAR at M2 to SAR at M1 = 60.5%

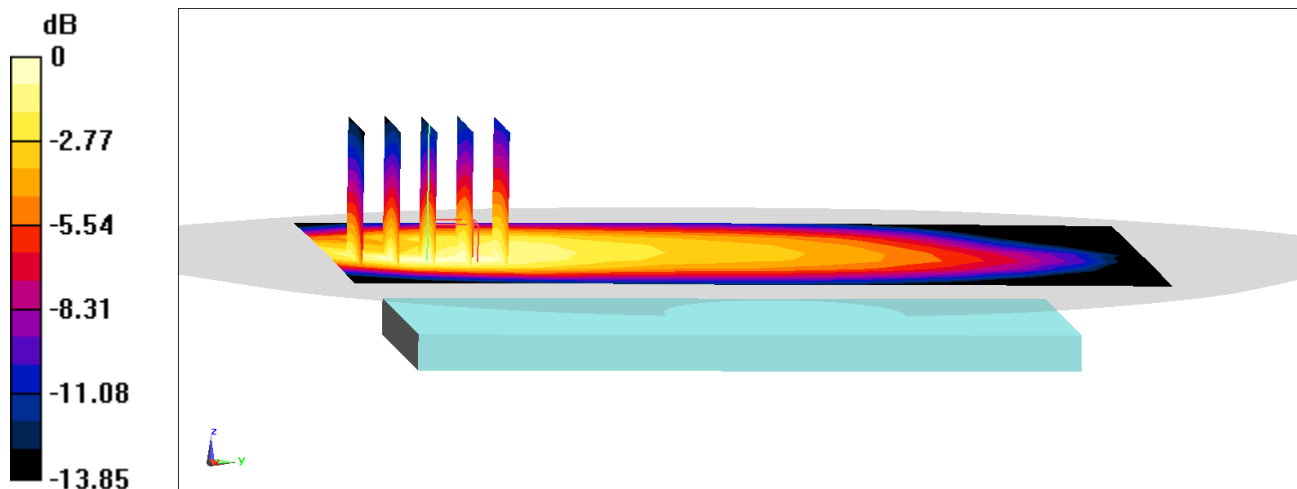

0 dB = 0.645 W/kg = -1.90 dBW/kg

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 25764

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.898 \text{ S/m}$; $\epsilon_r = 42.665$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/19/2023; Ambient Temp: 22.1°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7640; ConvF(10.91, 10.91, 10.91) @ 782 MHz; Calibrated: 2/10/2023

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1645; Calibrated: 2/16/2023

Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1937

Measurement SW: DASYS2, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Mode: LTE Band 13, Antenna A, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.96 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.849 W/kg

SAR(1 g) = 0.517 W/kg

Smallest distance from peaks to all points 3 dB below = 14.5 mm

Ratio of SAR at M2 to SAR at M1 = 60.3%

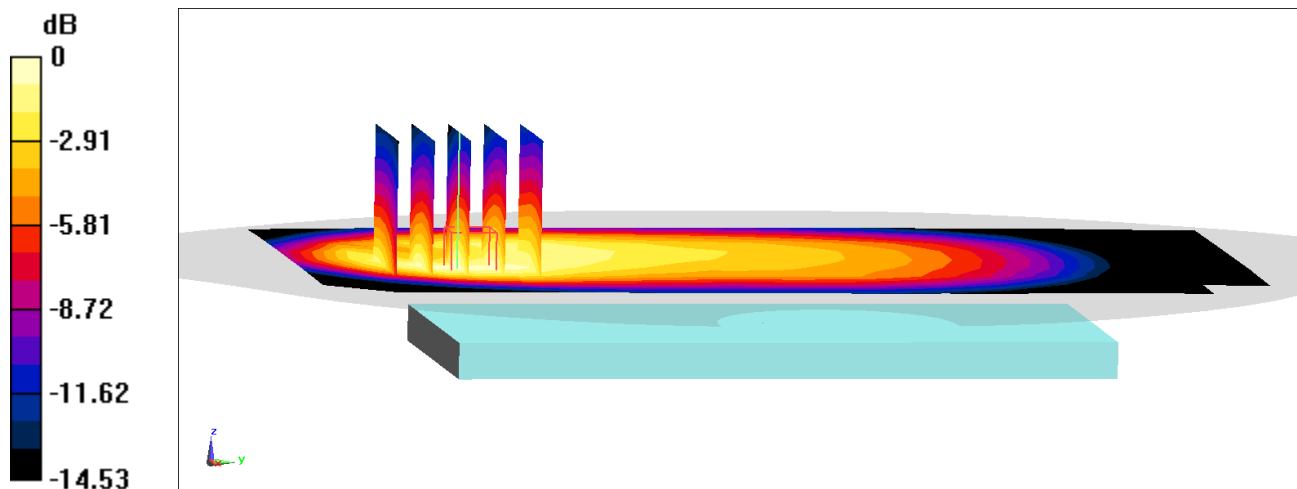

0 dB = 0.725 W/kg = -1.40 dBW/kg

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 25764

Communication System: UID 0, LTE Band 14; Frequency: 793 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 793 \text{ MHz}$; $\sigma = 0.883 \text{ S/m}$; $\epsilon_r = 41.07$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/21/2023; Ambient Temp: 22.1°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7640; ConvF(10.91, 10.91, 10.91) @ 793 MHz; Calibrated: 2/10/2023

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1645; Calibrated: 2/16/2023

Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1937

Measurement SW: DASYS2, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Mode: LTE Band 14, Antenna A, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.64 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.793 W/kg

SAR(1 g) = 0.497 W/kg

Smallest distance from peaks to all points 3 dB below = 14.5 mm

Ratio of SAR at M2 to SAR at M1 = 63%

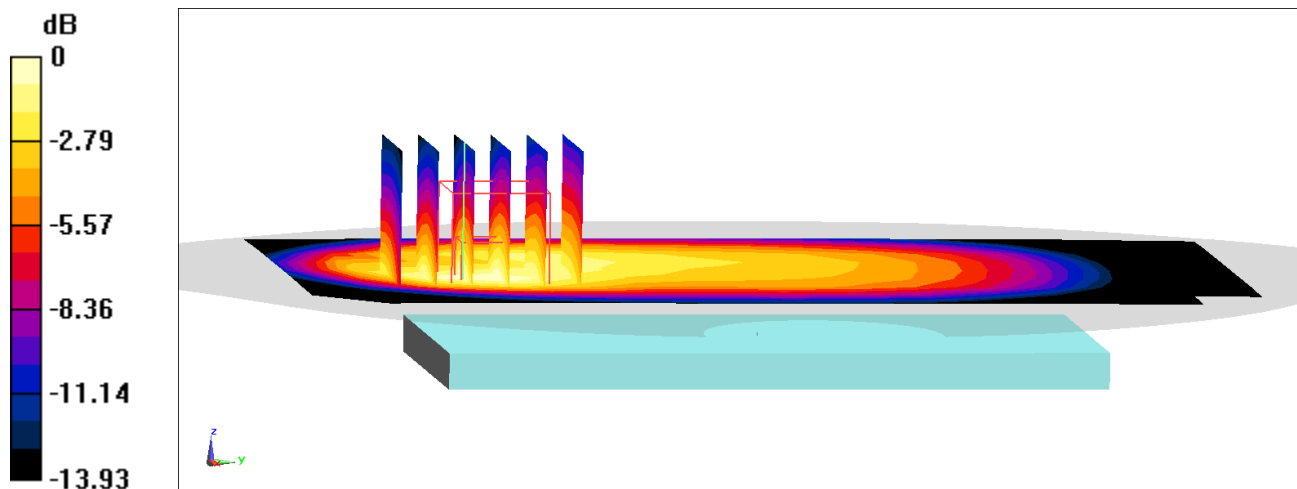

0 dB = 0.676 W/kg = -1.70 dBW/kg

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26895

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: 835 Head; Medium parameters used (interpolated):
 $f = 831.5$ MHz; $\sigma = 0.879$ S/m; $\epsilon_r = 39.777$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/14/2023; Ambient Temp: 21.1°C; Tissue Temp: 20.9°C

Probe: EX3DV4 - SN7640; ConvF(10.56, 10.56, 10.56) @ 831.5 MHz; Calibrated: 2/10/2023
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1645; Calibrated: 2/16/2023
Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1937
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Mode: LTE Band 26 (Cell.), Antenna A, Body SAR, Back side, Mid.ch,
15 MHz Bandwidth, QPSK, 1 RB, 74 RB Offset**

Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 26.32 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.898 W/kg

SAR(1 g) = 0.570 W/kg

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 62.7%

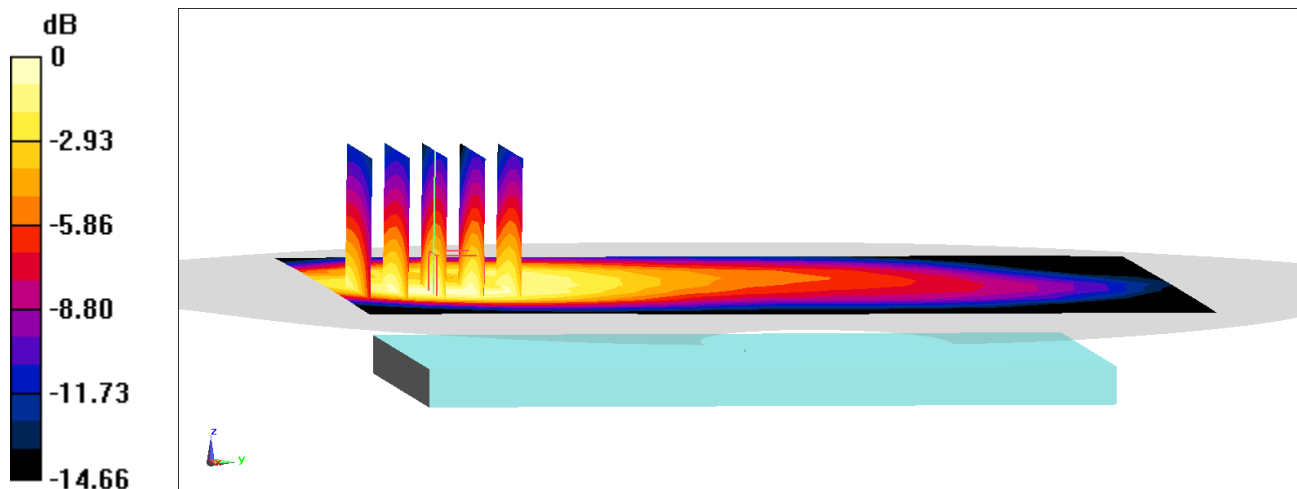

0 dB = 0.779 W/kg = -1.08 dBW/kg

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26523

Communication System: UID 0, LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: 835 Head; Medium parameters used (interpolated):
 $f = 836.5$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 40.13$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/20/2023; Ambient Temp: 22.4°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7637; ConvF(10.23, 10.23, 10.23) @ 836.5 MHz; Calibrated: 3/16/2023
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1652; Calibrated: 3/16/2023
Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Mode: LTE Band 5 (Cell.), ULCA CA_5B, Body SAR, Back side, Mid.ch,
PCC: Ch. 20525, 10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset
SCC: Ch. 20597, 5 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset

Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 25.73 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.831 W/kg

SAR(1 g) = 0.541 W/kg

Smallest distance from peaks to all points 3 dB below = 13.7 mm

Ratio of SAR at M2 to SAR at M1 = 67.3%

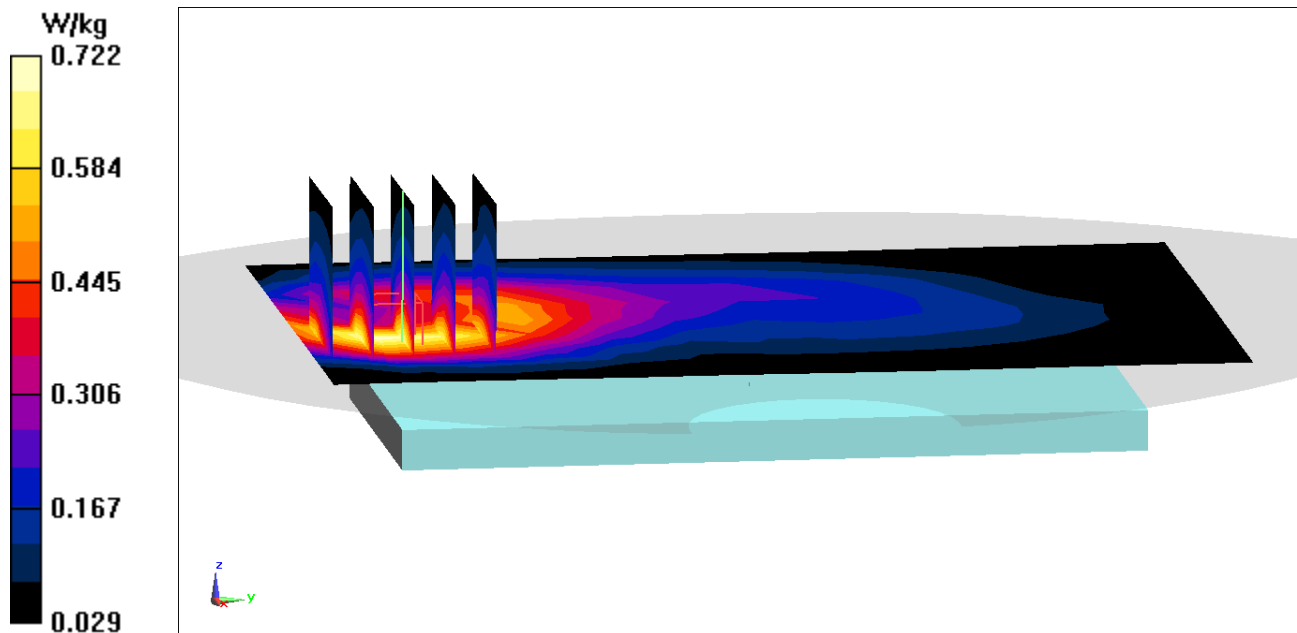

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26218

Communication System: UID:10169 - CAE, LTE-FDD; MAIA: Y; Frequency: 1720.0 MHz

Medium: 1750 Head; Medium parameters used:

f = 1720.0 MHz; cond = 1.29 S/m; perm = 39.8; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/21/2023; Ambient Temp: 21.0°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7547; ConvF:(8.16,8.16,8.16); Calibrated: 2022-10-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1322; Calibrated: 2022-10-17

Phantom: Twin-SAM V8.0; Serial: 1934

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 66, Antenna A, Body SAR, Back Side, Low Ch.,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.56 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.899 W/kg

SAR(1 g) = 0.536 W/kg

Smallest distance from peaks to all points 3 dB below is 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 85.1 %

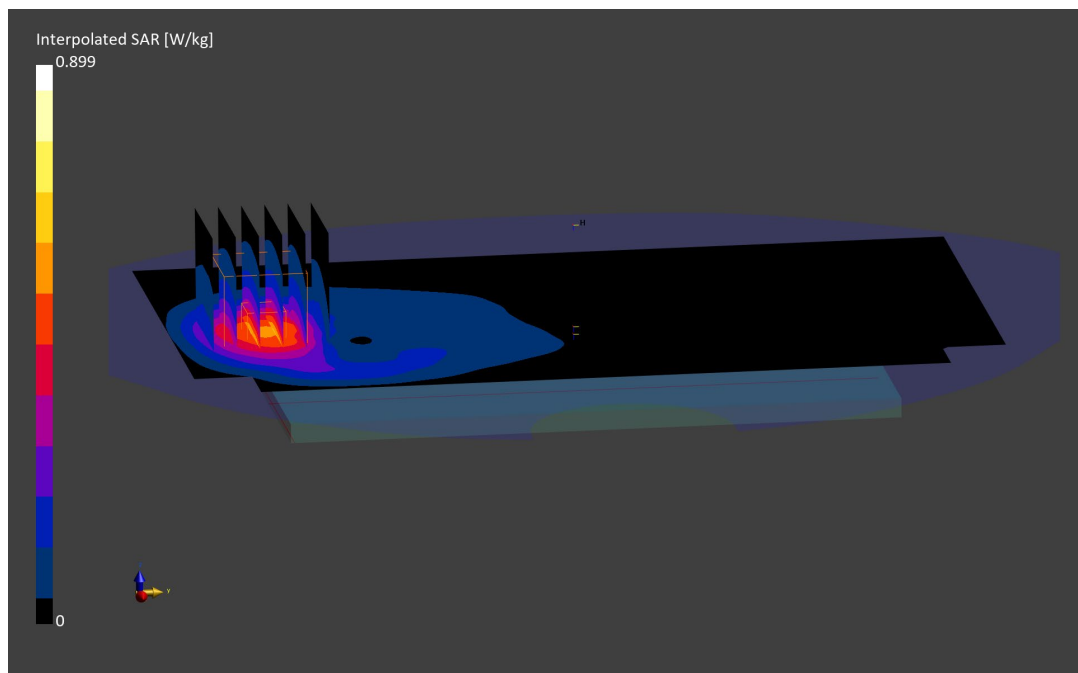

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26598

Communication System: UID:10297 - AAD, LTE-FDD; MAIA: Y; Frequency: 1860.0 MHz

Medium: 1900 Head; Medium parameters used:

f = 1860.0 MHz; cond = 1.37 S/m; perm = 39.2; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/19/2023; Ambient Temp: 21.4°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7410; ConvF:(8.04,8.04,8.04); Calibrated: 2022-07-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1583; Calibrated: 2022-07-18

Phantom: Twin-SAM V8.0; Serial: 1630

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 25, Antenna A, Body SAR, Back Side,
Low Ch., 20 MHz Bandwidth, QPSK, 50 RB, 25 RB Offset**

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (36.0 x 36.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.41 W/kg; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.633 W/kg

SAR(1 g) = 0.351 W/kg

Smallest distance from peaks to all points 3 dB below is 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 83.0 %

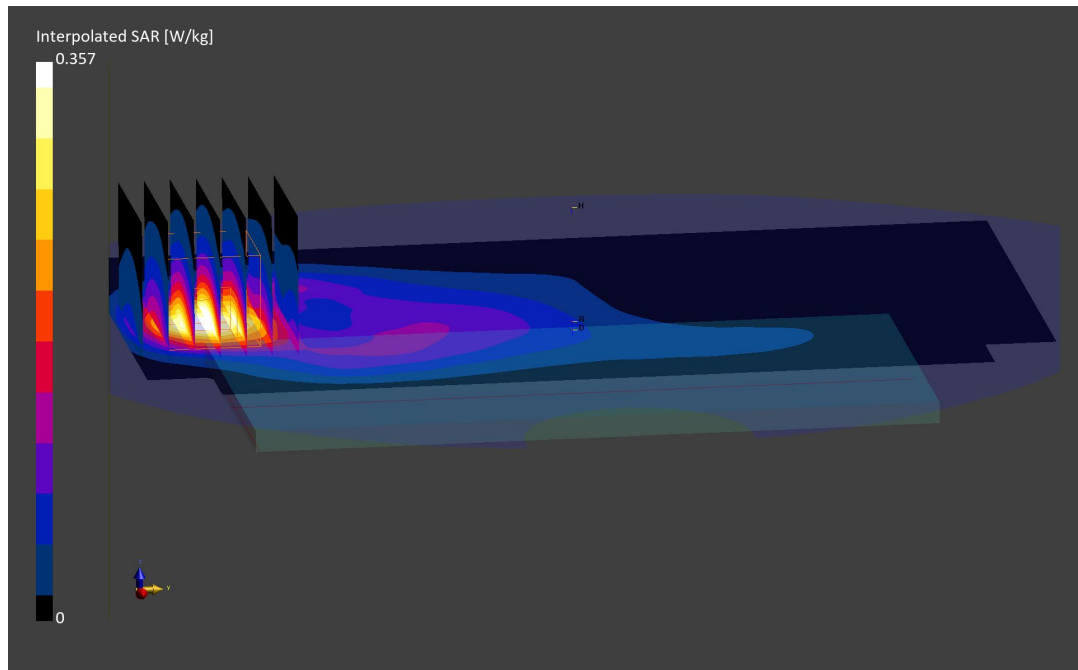

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26259

Communication System: UID:10175 - CAG, LTE-FDD; MAIA: Y; Frequency: 2310.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2310.0 MHz; cond = 1.75 S/m; perm = 39.6; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 7/21/2023; Ambient Temp: 22.1°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7713; ConvF:(8.53,8.53,8.53); Calibrated: 2023-01-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1530; Calibrated: 2023-01-18

Phantom: Twin-SAM V8.0; Serial: 2065

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 30, Antenna A, Body SAR, Back Side,
Mid Ch., 10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.29 W/kg; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.648 W/kg

SAR(1 g) = 0.327 W/kg

Smallest distance from peaks to all points 3 dB below is 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 79.7 %

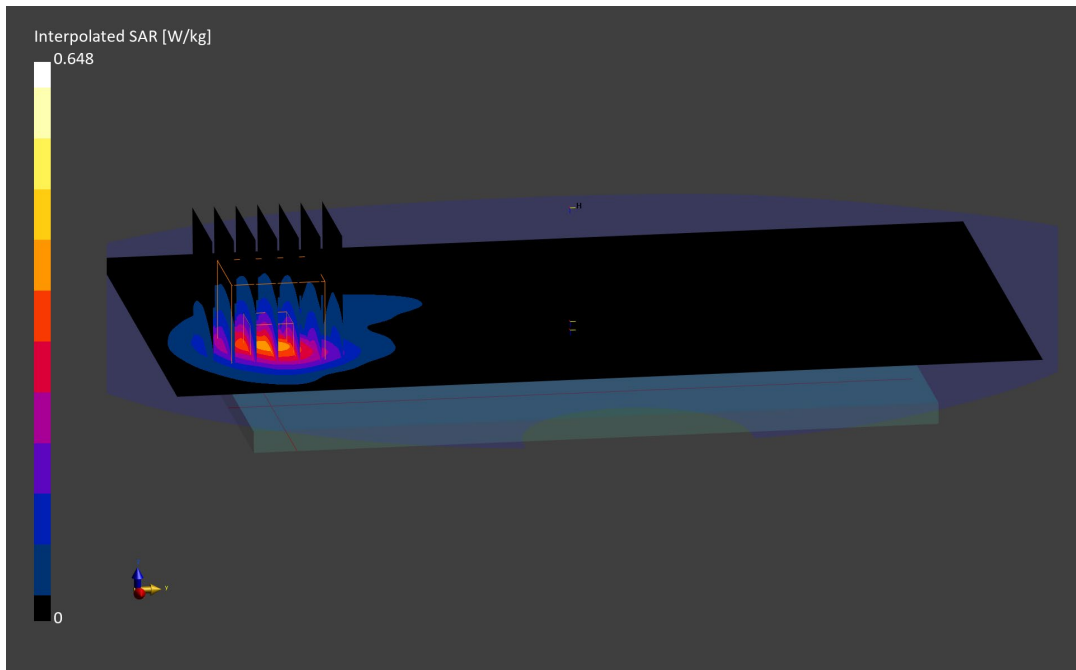

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26747

Communication System: UID:10297 - AAD, LTE-FDD; MAIA: Y; Frequency: 2510.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2510.0 MHz; cond = 1.91 S/m; perm = 39.2; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 07/05/2023; Ambient Temp: 20.3°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7565; ConvF:(7.08,7.08,7.08); Calibrated: 2023-01-12

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1466; Calibrated: 2023-01-20

Phantom: Twin-SAM V5.0; Serial: 1868

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 7, Antenna B, Body SAR, Back Side, Low Ch.,
20 MHz Bandwidth, QPSK, 50 RB, 25 RB Offset**

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.33 W/kg; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.697 W/kg

SAR(1 g) = 0.350 W/kg

Smallest distance from peaks to all points 3 dB below is 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 80.7 %

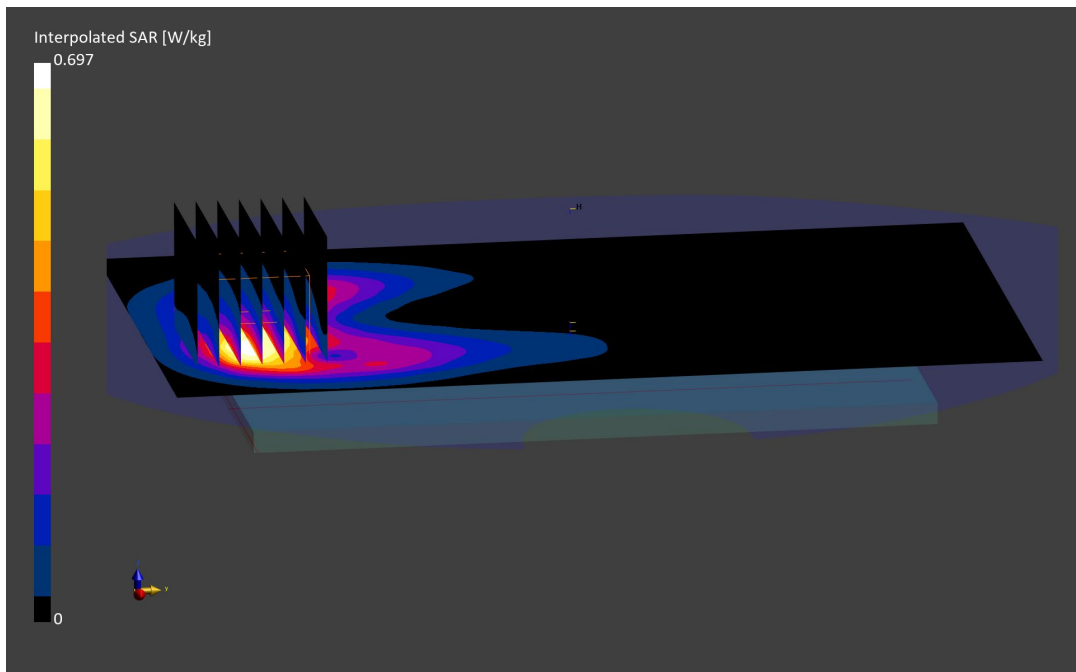

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26424

Communication System: UID:10151 - CAG, LTE-TDD; MAIA: Y; Frequency: 2593.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2593.0 MHz; cond = 1.93 S/m; perm = 37.3; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 07/12/2023; Ambient Temp: 20.4°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7565; ConvF:(6.89,6.89,6.89); Calibrated: 2023-01-12

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1466; Calibrated: 2023-01-20

Phantom: Twin-SAM V5.0; Serial: 1868

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 41, HPUE, Antenna B, Body SAR, Back Side, Mid Ch.,
20 MHz Bandwidth, QPSK, 50 RB, 50 RB Offset**

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.40 W/kg; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.851 W/kg

SAR(1 g) = 0.431 W/kg

Smallest distance from peaks to all points 3 dB below is 12.0 mm

Ratio of SAR at M2 to SAR at M1 = 80.0 %

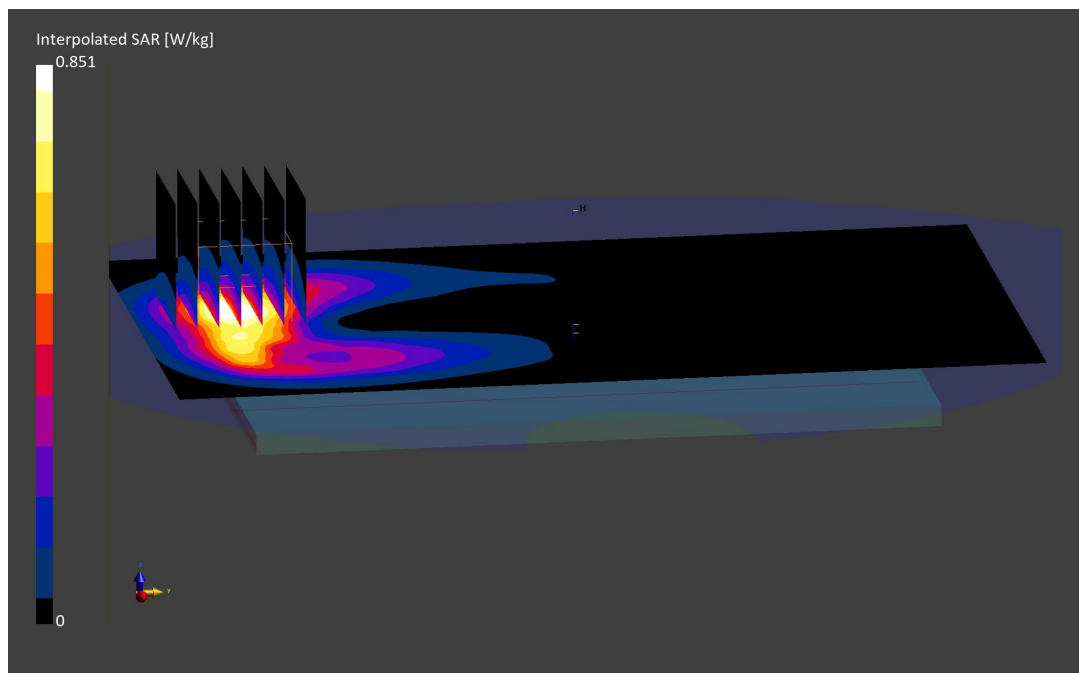

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 25913

Communication System: UID:10494 - AAF, LTE-TDD; MAIA: Y; Frequency: 3560.0 MHz

Medium: 3600 Head; Medium parameters used:

f = 3560.0 MHz; cond = 2.86 S/m; perm = 37.7; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/12/2023; Ambient Temp: 22.0°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7406; ConvF:(7.06,7.06,7.06); Calibrated: 2022-07-18

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1677; Calibrated: 2022-07-18

Phantom: Twin-SAM V8.0; Serial: 2064

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 48, Antenna F, Body SAR, Back Side, Low Ch.,
20 MHz Bandwidth, QPSK, 50 RB, 25 RB Offset**

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.5


Reference Value = 0.18 W/kg; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.427 W/kg

SAR(1 g) = 0.165 W/kg

Smallest distance from peaks to all points 3 dB below is 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 74.2 %

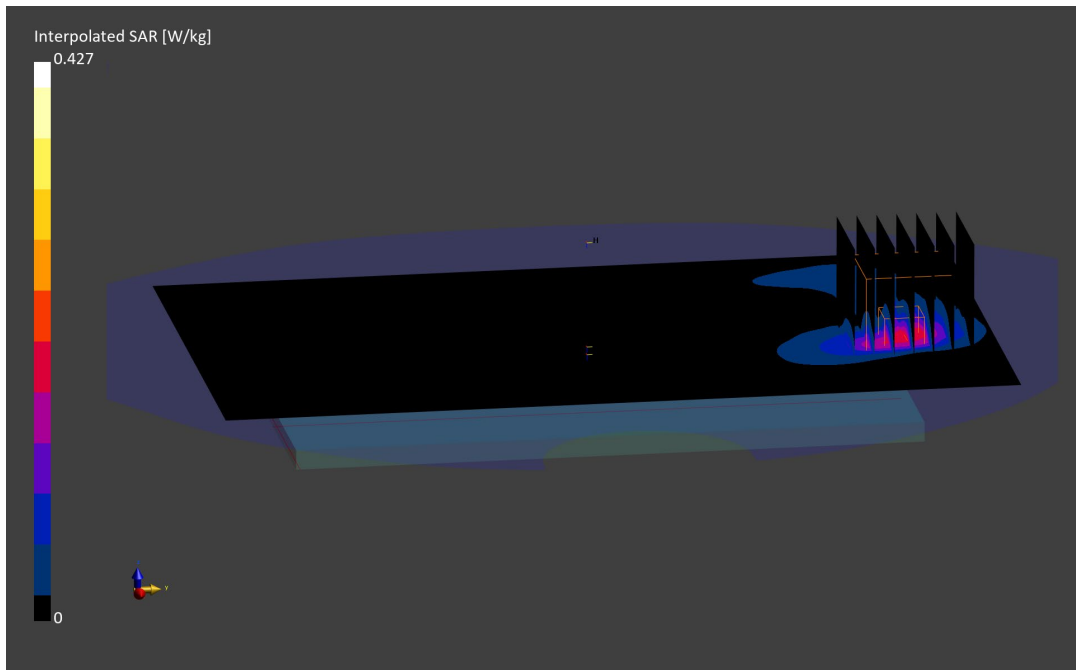

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26912

Communication System: UID 0, NR Band n71; Frequency: 680.5 MHz; Duty Cycle: 1:1
Medium: 750 Head; Medium parameters used (interpolated):
 $f = 680.5$ MHz; $\sigma = 0.847$ S/m; $\epsilon_r = 42.488$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/14/2023; Ambient Temp: 22.7°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7637; ConvF(10.29, 10.29, 10.29) @ 680.5 MHz; Calibrated: 3/16/2023
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1652; Calibrated: 3/16/2023
Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Mode: NR Band n71, Antenna A, Body SAR, Back Side, 20 MHz Bandwidth,
DFT-s-OFDM QPSK, Ch. 136100, 1 RB, 1 RB Offset**

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 21.83 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.605 W/kg

SAR(1 g) = 0.384 W/kg

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 64.7%

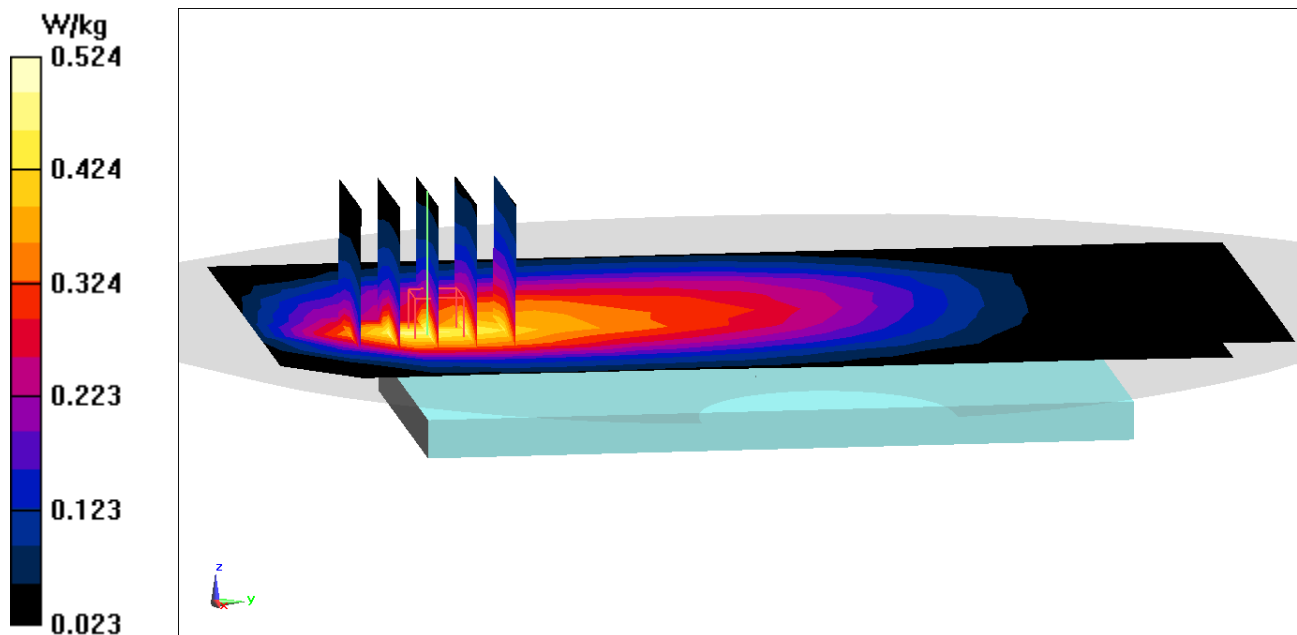

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26192

Communication System: UID 0, NR Band n12; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: 750 Head; Medium parameters used (interpolated):
 $f = 707.5$ MHz; $\sigma = 0.855$ S/m; $\epsilon_r = 41.313$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/21/2023; Ambient Temp: 22.1°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7640; ConvF(10.91, 10.91, 10.91) @ 707.5 MHz; Calibrated: 2/10/2023
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1645; Calibrated: 2/16/2023
Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1937
Measurement SW: DASYS2, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Mode: NR Band n12, Antenna A, Body SAR, Back Side, Ch. 141500
15 MHz Bandwidth, DFT-s-OFDM QPSK, 36RB, 22 RB Offset**

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 23.07 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.694 W/kg

SAR(1 g) = 0.443 W/kg

Smallest distance from peaks to all points 3 dB below = 16.5 mm

Ratio of SAR at M2 to SAR at M1 = 64.2%

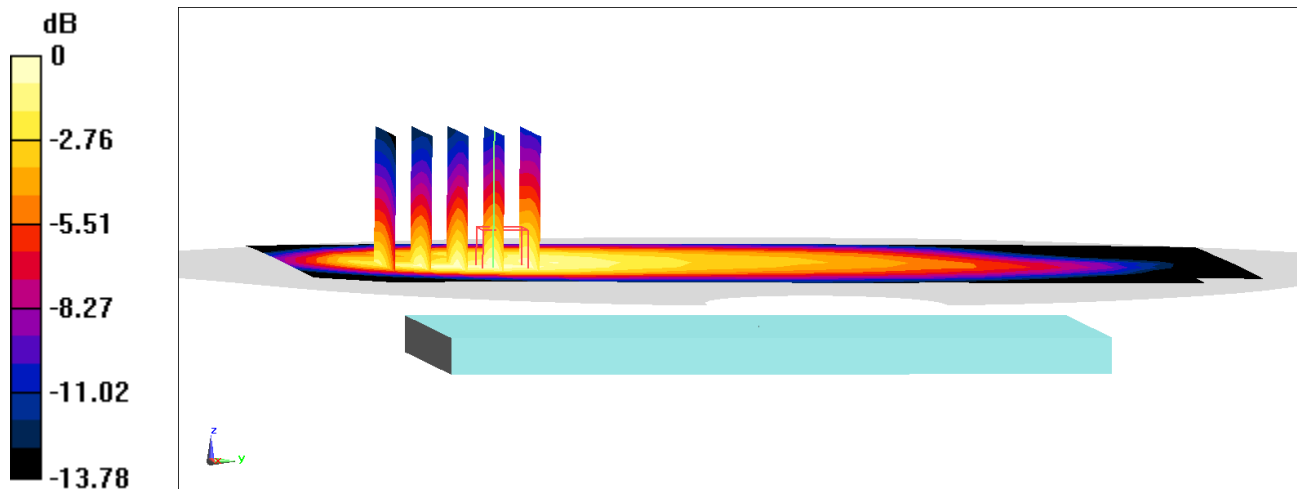

0 dB = 0.600 W/kg = -2.22 dBW/kg

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26374

Communication System: UID:10931 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 831.5 MHz

Medium: 835 Head; Medium parameters used:

f = 831.5 MHz; cond = 0.865 S/m; perm = 41.0; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/22/2023; Ambient Temp: 21.0°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7406; ConvF:(9.86,9.86,9.86); Calibrated: 2022-07-18

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1677; Calibrated: 2022-07-18

Phantom: Twin-SAM V8.0; Serial: 2064

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: NR Band n26, Antenna A, Body SAR, Back Side, Ch. 166300,
20 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 104 RB Offset**

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.43 W/kg; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.687 W/kg

SAR(1 g) = 0.418 W/kg

Smallest distance from peaks to all points 3 dB below is 14.0 mm

Ratio of SAR at M2 to SAR at M1 = 82.9 %

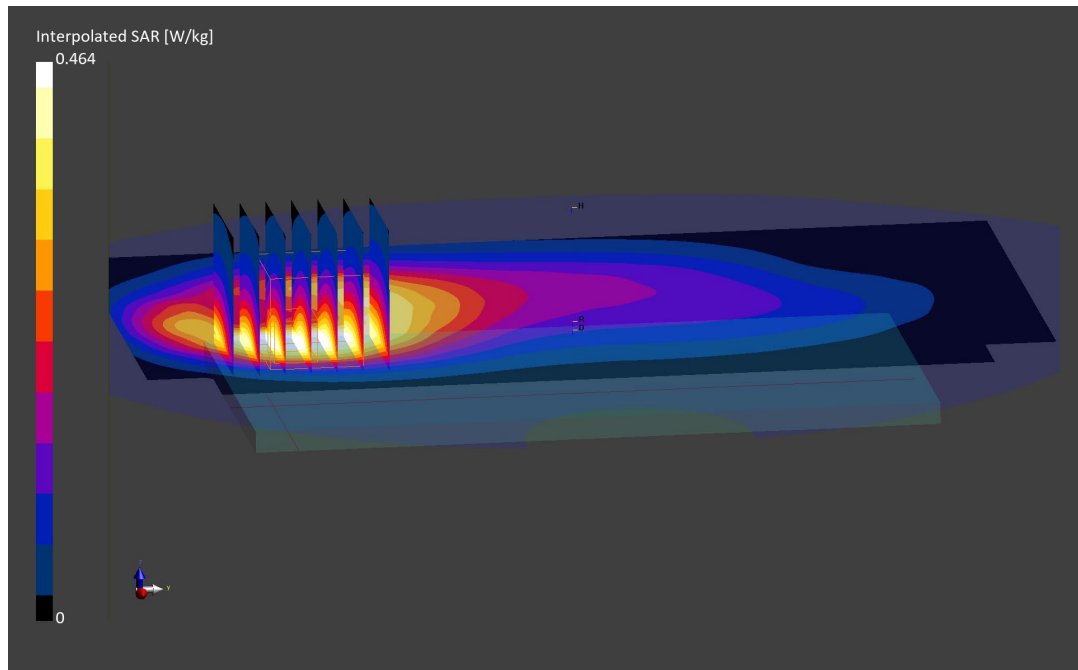

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 25772

Communication System: UID:10934 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 1745.0 MHz

Medium: 1750 Head; Medium parameters used:

f = 1745.0 MHz; cond = 1.31 S/m; perm = 40.4; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/13/2023; Ambient Temp: 21.6°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7410; ConvF:(8.34,8.34,8.34); Calibrated: 2022-07-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1583; Calibrated: 2022-07-18

Phantom: Twin-SAM V8.0; Serial: 1630

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: NR Band n66, Antenna A, Body SAR, Back Side, Ch. 349000,
40 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 108 RB Offset**

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (36.0 x 36.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.72 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.662 W/kg

Smallest distance from peaks to all points 3 dB below is 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 84.0 %

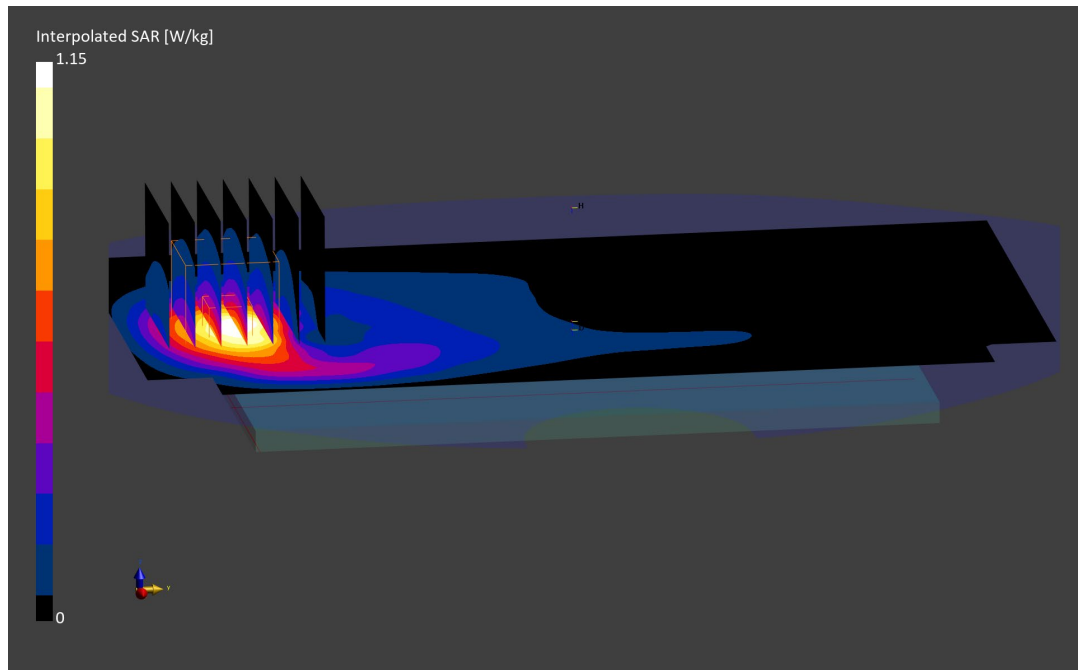

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26549

Communication System: UID:10773 - AAD, CW; MAIA: Y; Frequency: 1882.5 MHz
Medium: 1900 Head; Medium parameters used:
f = 1882.5 MHz; cond = 1.39 S/m; perm = 39.5; density = 1000 kg/m³
Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/12/2023; Ambient Temp: 22.5°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7570; ConvF:(8.28,8.28,8.28); Calibrated: 2023-01-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1558; Calibrated: 2023-01-17
Phantom: Twin-SAM V8.0; Serial: 2060
Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: NR Band n25, Antenna F, Body SAR, Back Side, Ch. 376500,
40 MHz Bandwidth, CP-OFDM QPSK, 1 RB, 1 RB Offset**

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.24 W/kg; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.415 W/kg

SAR(1 g) = 0.243 W/kg

Smallest distance from peaks to all points 3 dB below is 14.5 mm

Ratio of SAR at M2 to SAR at M1 = 83.6 %

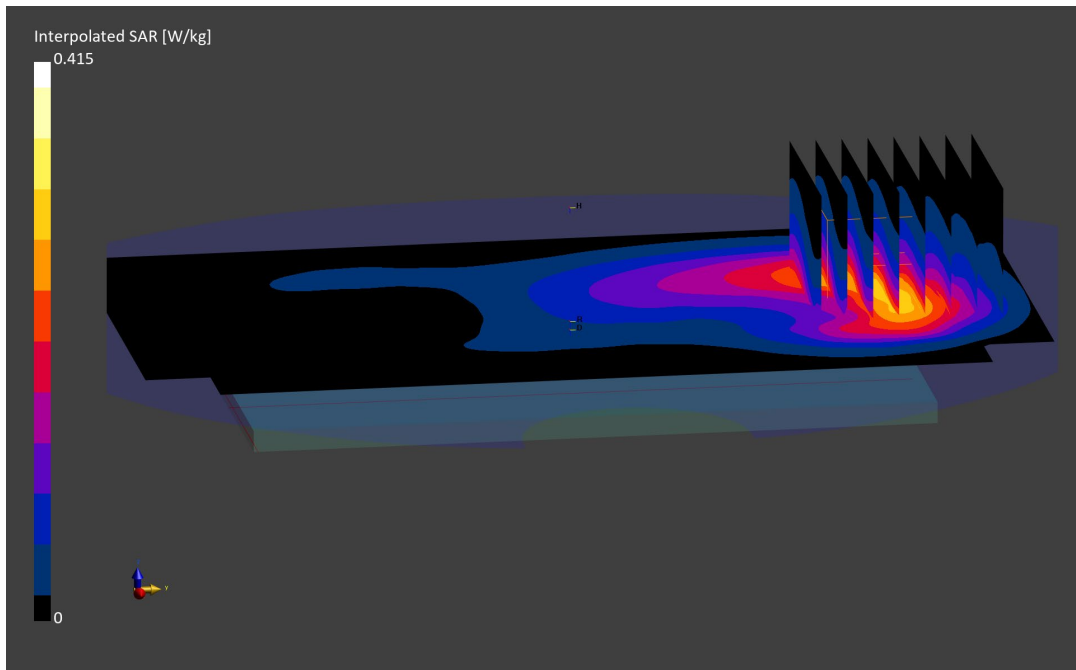

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26549

Communication System: UID:10768 - AAD, CW; MAIA: Y; Frequency: 2310.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2310.0 MHz; cond = 1.76 S/m; perm = 38.6; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/15/2023; Ambient Temp: 21°C; Tissue Temp: 21°C

Probe: EX3DV4 - SN7406; ConvF:(7.86,7.86,7.86); Calibrated: 2022-07-18

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1677; Calibrated: 2022-07-18

Phantom: Twin-SAM V8.0; Serial: 2064

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: NR Band n30, Antenna F, Body SAR, Back Side, Ch. 462000,
10 MHz Bandwidth, CP-OFDM QPSK, 1 RB, 1 RB Offset**

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.36 W/kg; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.642 W/kg

SAR(1 g) = 0.352 W/kg

Smallest distance from peaks to all points 3 dB below is 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 81.9 %

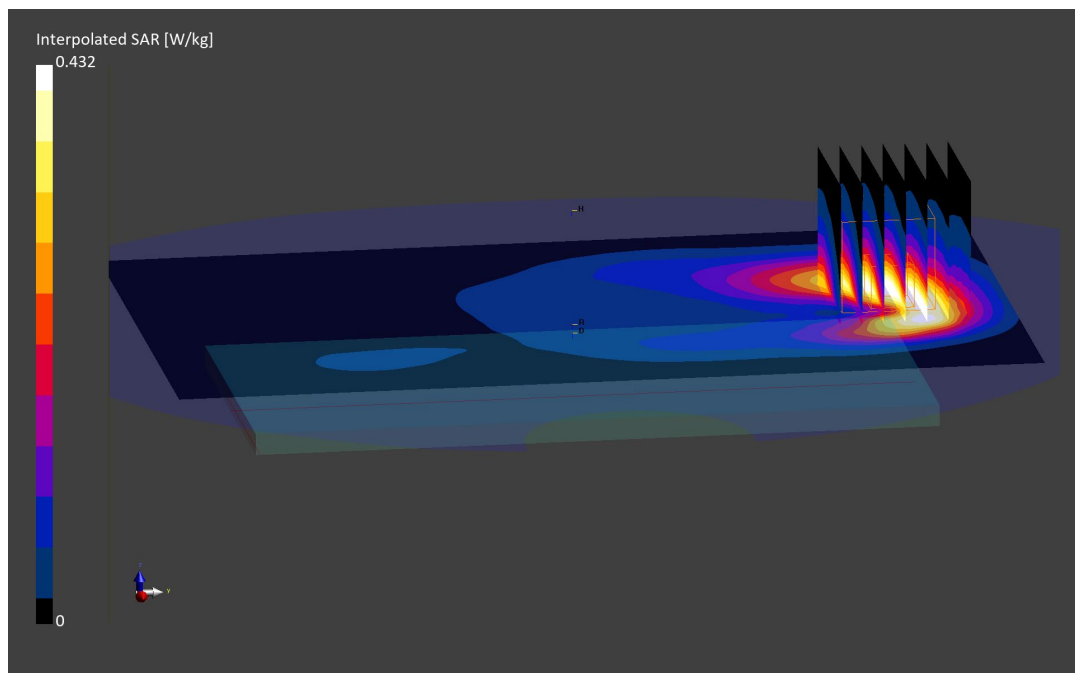

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26366

Communication System: UID:10803 - AAD, 5G NR FR1 TDD; MAIA: Y; Frequency: 2593.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2593.0 MHz; cond = 1.89 S/m; perm = 38.0; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/21/2023; Ambient Temp: 24.9°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN3837; ConvF:(7.15,7.15,7.15); Calibrated: 2023-01-17

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn793; Calibrated: 2023-01-17

Phantom: Twin-SAM V8.0; Serial: 1944

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: NR Band n41, Antenna B, Body SAR, Bottom Edge,
Ch. 518598, 100 MHz Bandwidth, CP-OFDM QPSK, 1 RB, 1 RB Offset**

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.39 W/kg; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.886 W/kg

SAR(1 g) = 0.429 W/kg

Smallest distance from peaks to all points 3 dB below is 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.5 %

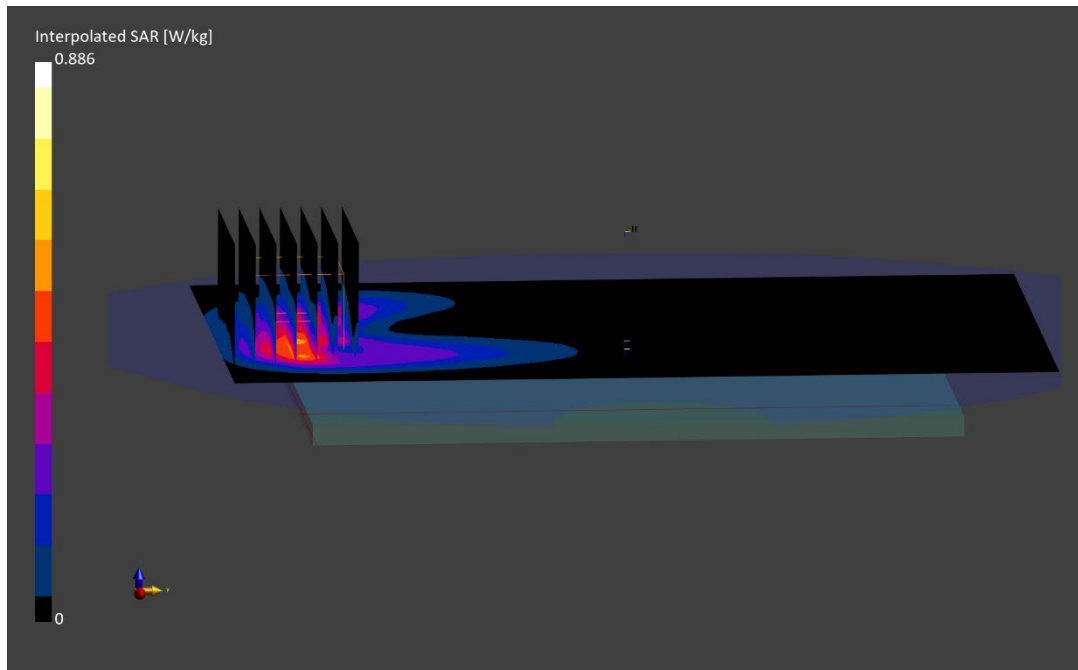

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26903

Communication System: UID:10913 - AAB, 5G NR FR1 TDD; MAIA: Y; Frequency: 3680.0 MHz

Medium: 3600 Head; Medium parameters used:

f = 3680.0 MHz; cond = 2.96 S/m; perm = 36.4; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/19/2023; Ambient Temp: 19.9°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7638; ConvF:(6.99,6.99,6.99); Calibrated: 2023-03-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1408; Calibrated: 2023-03-13

Phantom: Twin-SAM V8.0; Serial: 1357

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: NR Band n48, Antenna F, Body SAR, Back Side, Ch. 645332,
40 MHz Bandwidth, DFT-s-OFDM QPSK, 50 RB, 56 RB Offset**

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.5


Reference Value = 0.26 W/kg; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.373 W/kg

SAR(1 g) = 0.142 W/kg

Smallest distance from peaks to all points 3 dB below is 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 72.9 %

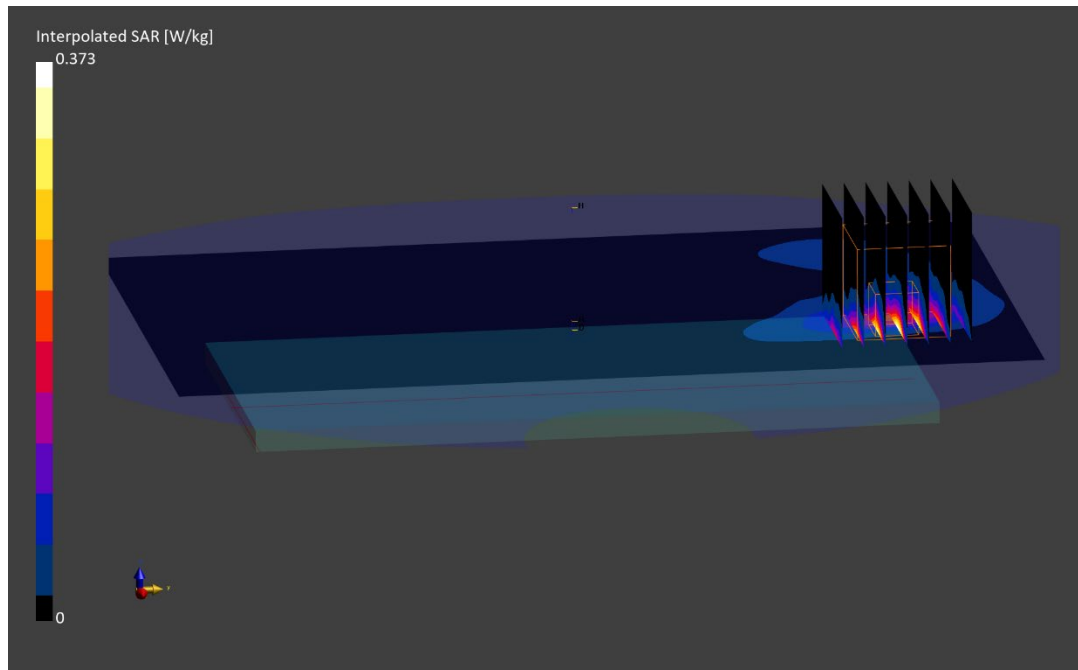

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26366

Communication System: UID:0 - -, CW; MAIA: Y; Frequency: 3500.0 MHz

Medium: 3600 Head; Medium parameters used:

f = 3500.0 MHz; cond = 2.79 S/m; perm = 37.3; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 07/04/2023; Ambient Temp: 20.5°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7638; ConvF:(7.02,7.02,7.02); Calibrated: 2023-03-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1408; Calibrated: 2023-03-13

Phantom: Twin-SAM V8.0; Serial: 1357

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: NR Band n77 DoD, Antenna D, Body SAR, Back Side,
Ch. 633334, 100 MHz Bandwidth, CW/SRS**

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.5


Reference Value = 0.42 W/kg; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.615 W/kg

SAR(1 g) = 0.254 W/kg

Smallest distance from peaks to all points 3 dB below is 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 77.6 %

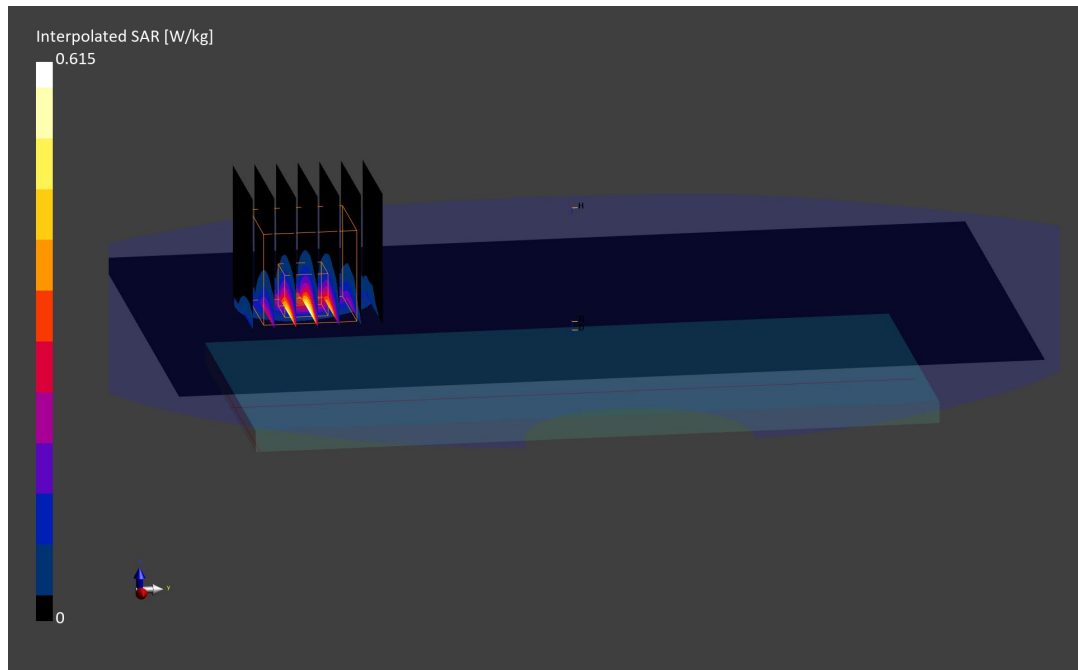

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 29519

Communication System: UID:10415 - AAA, WLAN; MAIA: Y; Frequency: 2462.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2462.0 MHz; cond = 1.85 S/m; perm = 37.3; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 07/02/2023; Ambient Temp: 23.5°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7570; ConvF:(7.55,7.55,7.55); Calibrated: 2023-01-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1558; Calibrated: 2023-01-17

Phantom: Twin-SAM V8.0; Serial: 2060

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: IEEE 802.11b, 22 MHz Bandwidth, MIMO, Body SAR, Back Side, Ch. 11, 1 Mbps

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.27 W/kg; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.496 W/kg

SAR(1 g) = 0.269 W/kg

Smallest distance from peaks to all points 3 dB below is 13.2 mm

Ratio of SAR at M2 to SAR at M1 = 78.9 %

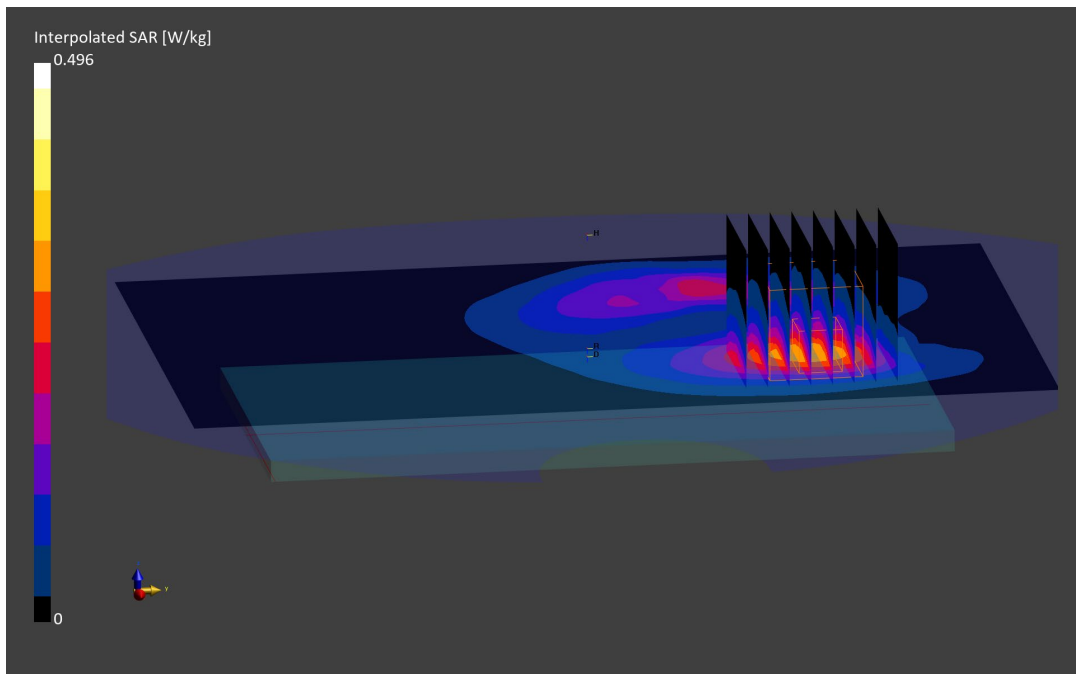

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 29568

Communication System: UID:10196 - CAD, WLAN; MAIA: Y; Frequency: 5320.0 MHz

Medium: 5200-5800 Head; Medium parameters used:

f = 5320.0 MHz; cond = 4.57 S/m; perm = 34.9; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/27/2023; Ambient Temp: 23.9°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7570; ConvF:(5.52,5.52,5.52); Calibrated: 2023-01-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1558; Calibrated: 2023-01-17

Phantom: Twin-SAM V8.0; Serial: 2060

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: IEEE 802.11n, 20 MHz Bandwidth, UNII-2A, MIMO,
Ch. 64, Body SAR, Back Side, 6.5 Mbps**

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4


Reference Value = 0.30 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.359 W/kg

Smallest distance from peaks to all points 3 dB below is 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 64.5 %

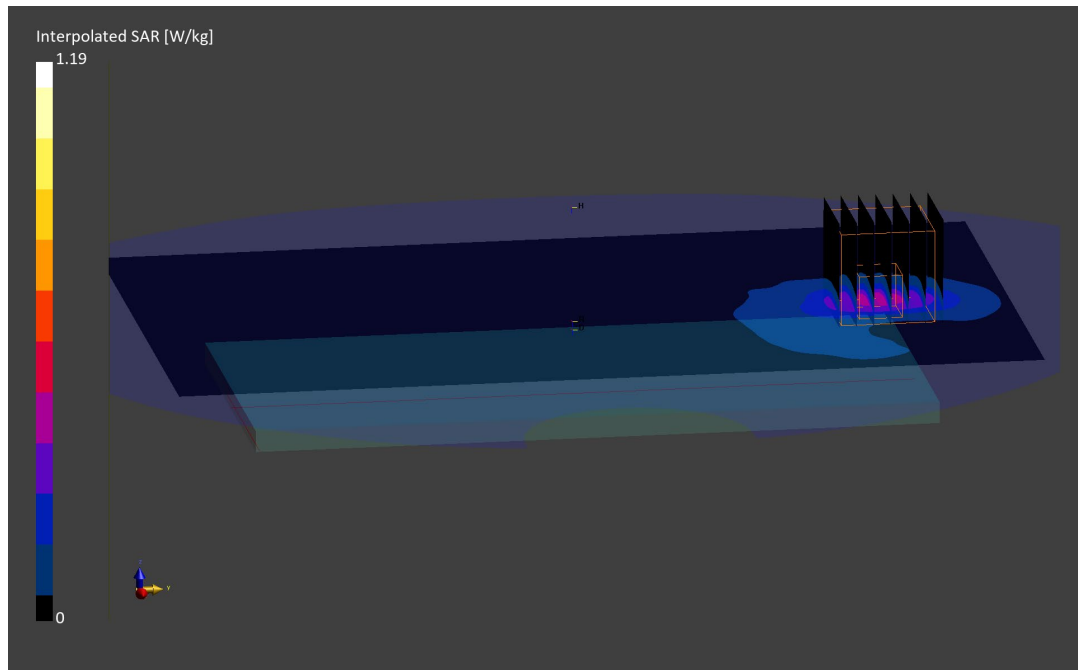

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 29568

Communication System: UID:10032 - CAA, Bluetooth; MAIA: Y; Frequency: 2441.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2441.0 MHz; cond = 1.80 S/m; perm = 38.8; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/20/2023; Ambient Temp: 24.6°C; Tissue Temp: 22.9°C

Probe: EX3DV4 - SN7570; ConvF:(7.55,7.55,7.55); Calibrated: 2023-01-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1558; Calibrated: 2023-01-17

Phantom: Twin-SAM V8.0; Serial: 2060

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: Bluetooth, Antenna 1, Body SAR, Ch. 39, 1 Mbps, Back Side

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.11 W/kg; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.216 W/kg

SAR(1 g) = 0.116 W/kg

Smallest distance from peaks to all points 3 dB below is 15.9 mm

Ratio of SAR at M2 to SAR at M1 = 79.4 %

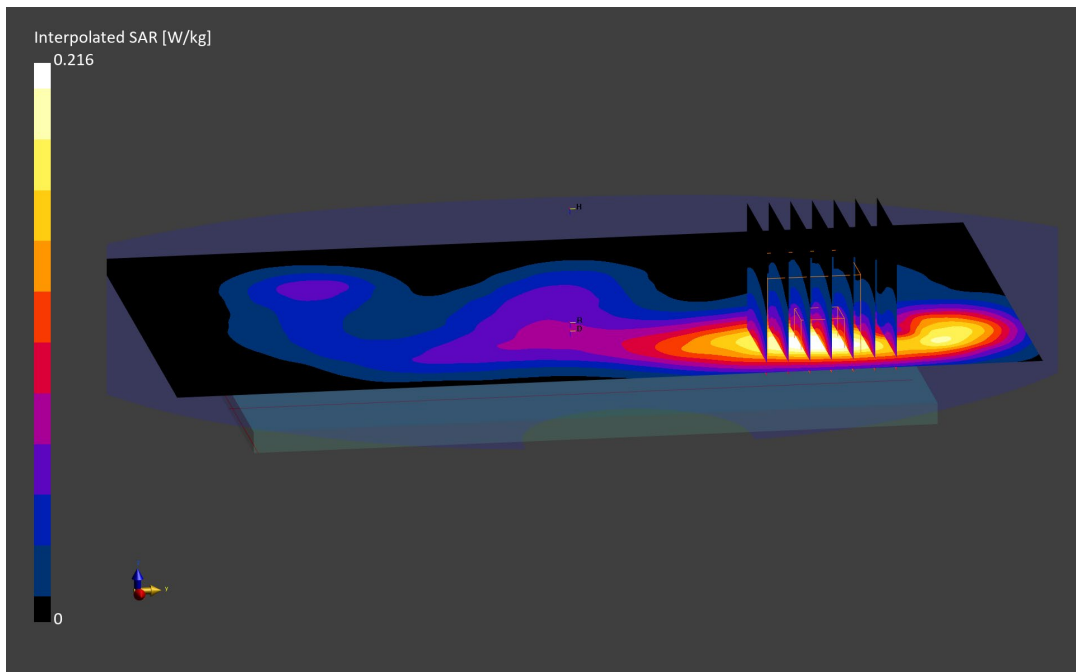

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26895

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 848.8 MHz; Duty Cycle: 1:2.76
Medium: 835 Head; Medium parameters used (interpolated):
 $f = 848.8$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 39.989$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06/12/2023; Ambient Temp: 22.4°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7640; ConvF(10.56, 10.56, 10.56) @ 848.8 MHz; Calibrated: 2/10/2023
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1645; Calibrated: 2/16/2023
Phantom: Twin-SAM V8.0lte me; Type: QD 000 P41 AA; Serial: 1937
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Mode: GPRS 850, Antenna A, Body SAR, Back side, High.ch, 3 Tx Slots

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.50 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.781 W/kg

SAR(1 g) = 0.490 W/kg

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 63.6%

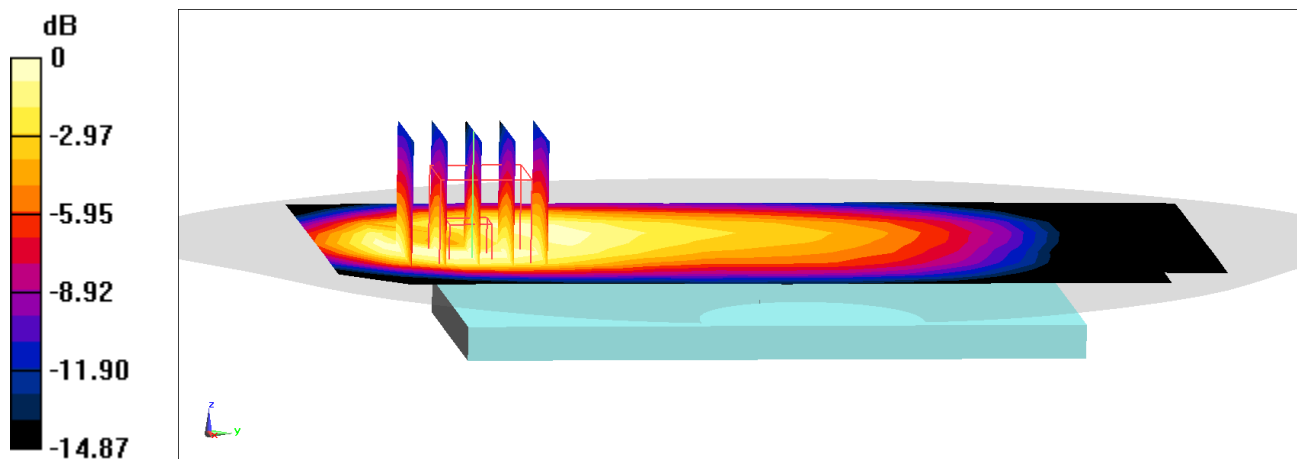

0 dB = 0.675 W/kg = -1.71 dBW/kg

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26655

Communication System: UID:10028 - DAC, GSM; MAIA: Y; Frequency: 1909.8 MHz

Medium: 1900 Head; Medium parameters used:

f = 1909.8 MHz; cond = 1.40 S/m; perm = 40.5; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/14/2023; Ambient Temp: 22.3°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7547; ConvF:(7.81,7.81,7.81); Calibrated: 2022-10-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1322; Calibrated: 2022-10-17

Phantom: Twin-SAM V8.0; Serial: 1934

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: GPRS 1900, Antenna A, Body SAR, Bottom Edge, High Ch., 4 Tx Slots

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.31 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.521 W/kg

SAR(1 g) = 0.296 W/kg

Smallest distance from peaks to all points 3 dB below is 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 84.5 %

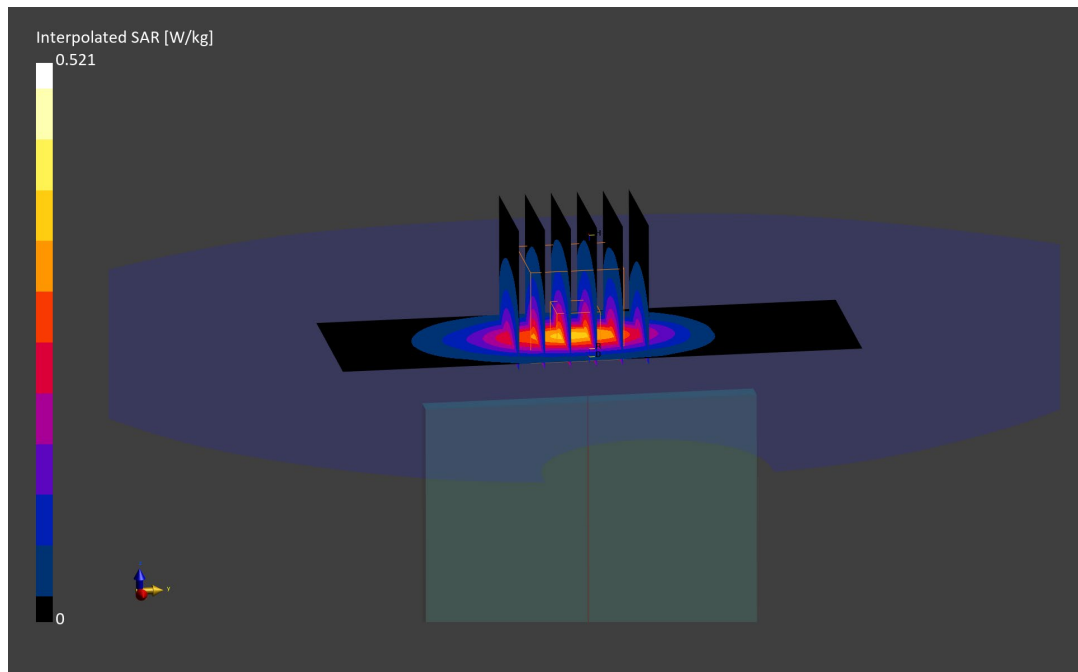

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26655

Communication System: UID:10011 - CAB, WCDMA; MAIA: Y; Frequency: 1752.6 MHz

Medium: 1750 Head; Medium parameters used:

f = 1752.6 MHz; cond = 1.31 S/m; perm = 41.7; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/12/2023; Ambient Temp: 22.5°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7547; ConvF:(8.16,8.16,8.16); Calibrated: 2022-10-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1322; Calibrated: 2022-10-17

Phantom: Twin-SAM V8.0; Serial: 1934

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: UMTS 1750, Antenna A, Body SAR, Bottom Edge, High Ch.

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.90 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.850 W/kg

Smallest distance from peaks to all points 3 dB below is 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 84.3 %

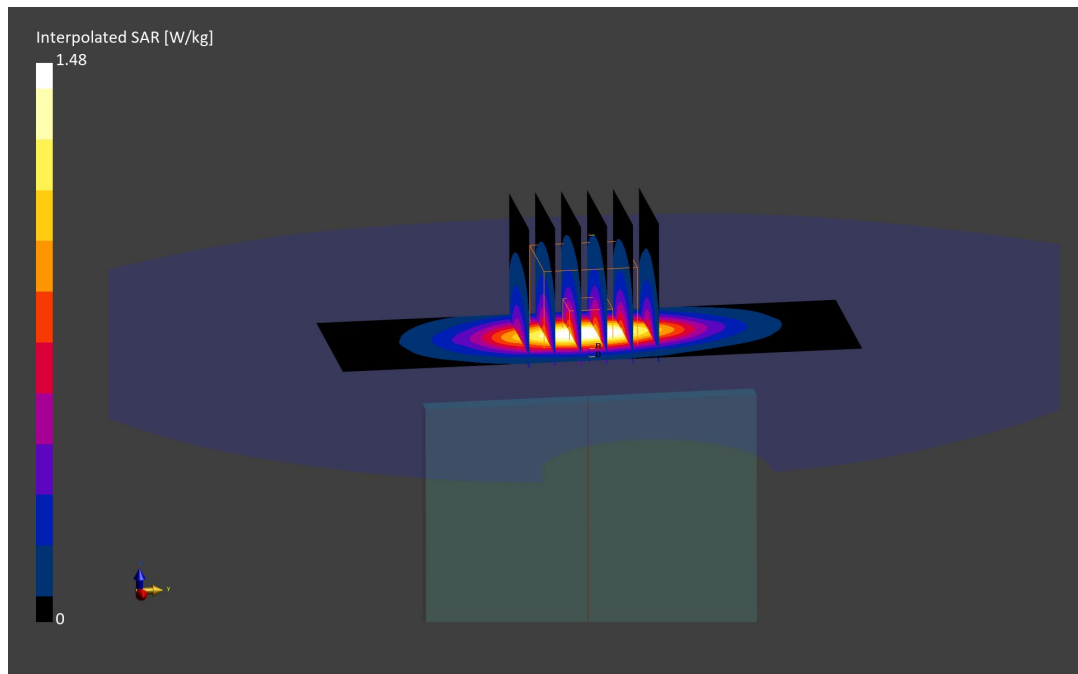

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26655

Communication System: UID:10011 - CAB, WCDMA; MAIA: Y; Frequency: 1852.4 MHz

Medium: 1900 Head; Medium parameters used:

f = 1852.4 MHz; cond = 1.34 S/m; perm = 41.9; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/19/2023; Ambient Temp: 23.0°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7547; ConvF:(7.81,7.81,7.81); Calibrated: 2022-10-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1322; Calibrated: 2022-10-17

Phantom: Twin-SAM V8.0; Serial: 1934

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: UMTS 1900, Antenna A, Body SAR, Bottom Edge, Low Ch.

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.45 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.733 W/kg

SAR(1 g) = 0.428 W/kg

Smallest distance from peaks to all points 3 dB below is 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 85.0 %

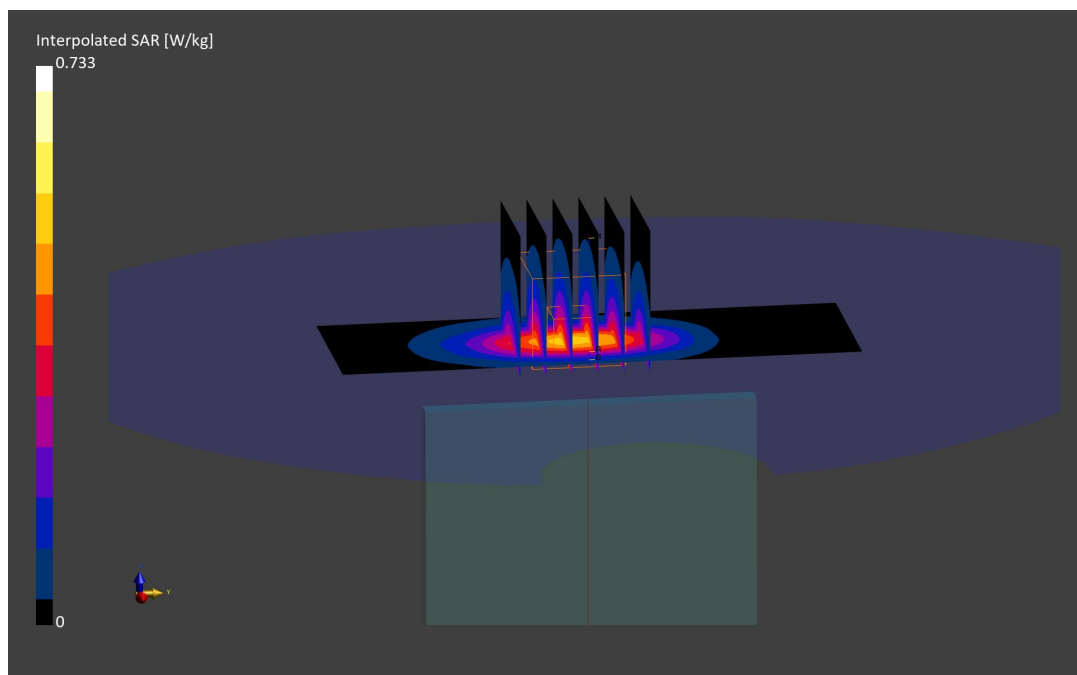

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26218

Communication System: UID:10297 - AAD, LTE-FDD; MAIA: Y; Frequency: 1745.0 MHz

Medium: 1750 Head; Medium parameters used:

f = 1745.0 MHz; cond = 1.30 S/m; perm = 39.7; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/21/2023; Ambient Temp: 21.0°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7547; ConvF:(8.16,8.16,8.16); Calibrated: 2022-10-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1322; Calibrated: 2022-10-17

Phantom: Twin-SAM V8.0; Serial: 1934

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 66, Antenna A, Body SAR, Bottom Edge, Mid Ch.,
20 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset**

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 1.00 W/kg; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 0.949 W/kg

Smallest distance from peaks to all points 3 dB below is 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 84.2 %

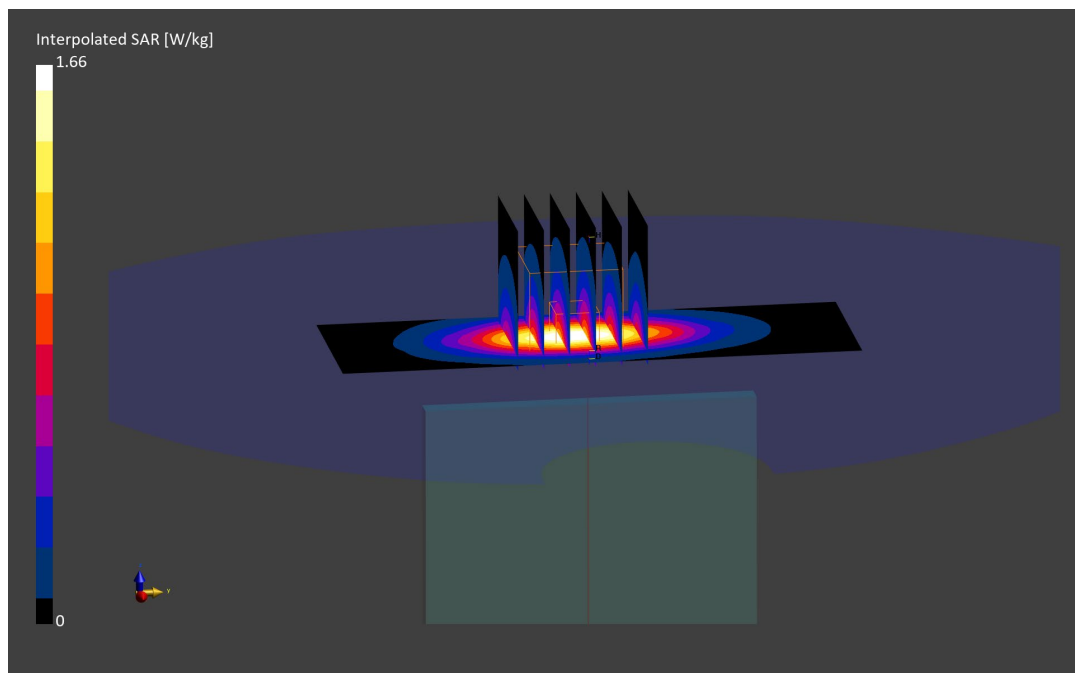

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26598

Communication System: UID:10100 - CAE, LTE-FDD; MAIA: Y; Frequency: 1905.0 MHz

Medium: 1900 Head; Medium parameters used:

f = 1905.0 MHz; cond = 1.40 S/m; perm = 39.1; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/19/2023; Ambient Temp: 21.4°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7410; ConvF:(8.04,8.04,8.04); Calibrated: 2022-07-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1583; Calibrated: 2022-07-18

Phantom: Twin-SAM V8.0; Serial: 1630

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 25, Antenna A, Body SAR, Bottom Edge, High Ch.,
20 MHz Bandwidth, QPSK, 100 RB, 0 RB Offset**

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=15.0 mm

Zoom Scan (36.0 x 36.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.82 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.702 W/kg

Smallest distance from peaks to all points 3 dB below is 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 81.7 %

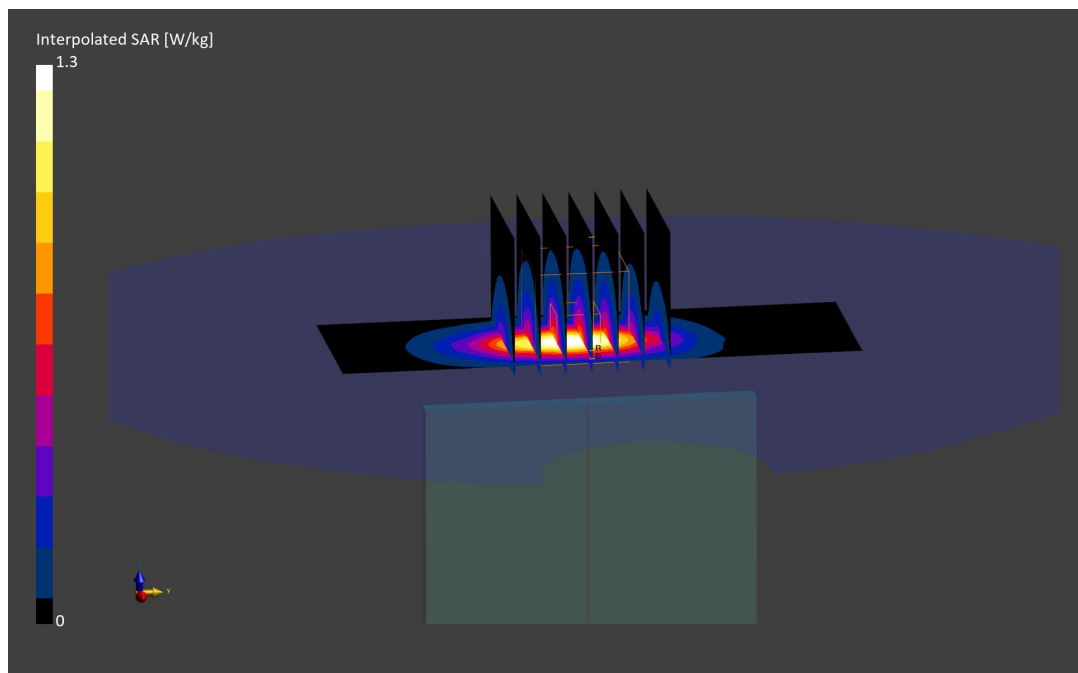

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26259

Communication System: UID:10175 - CAG, LTE-FDD; MAIA: Y; Frequency: 2310.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2310.0 MHz; cond = 1.75 S/m; perm = 39.6; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 7/21/2023; Ambient Temp: 22.1°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7713; ConvF:(8.53,8.53,8.53); Calibrated: 2023-01-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1530; Calibrated: 2023-01-18

Phantom: Twin-SAM V8.0; Serial: 2065

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 30, Antenna A, Body SAR, Bottom Edge, Mid Ch.,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.79 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.639 W/kg

Smallest distance from peaks to all points 3 dB below is 10.0 mm

Ratio of SAR at M2 to SAR at M1 = 80.7 %

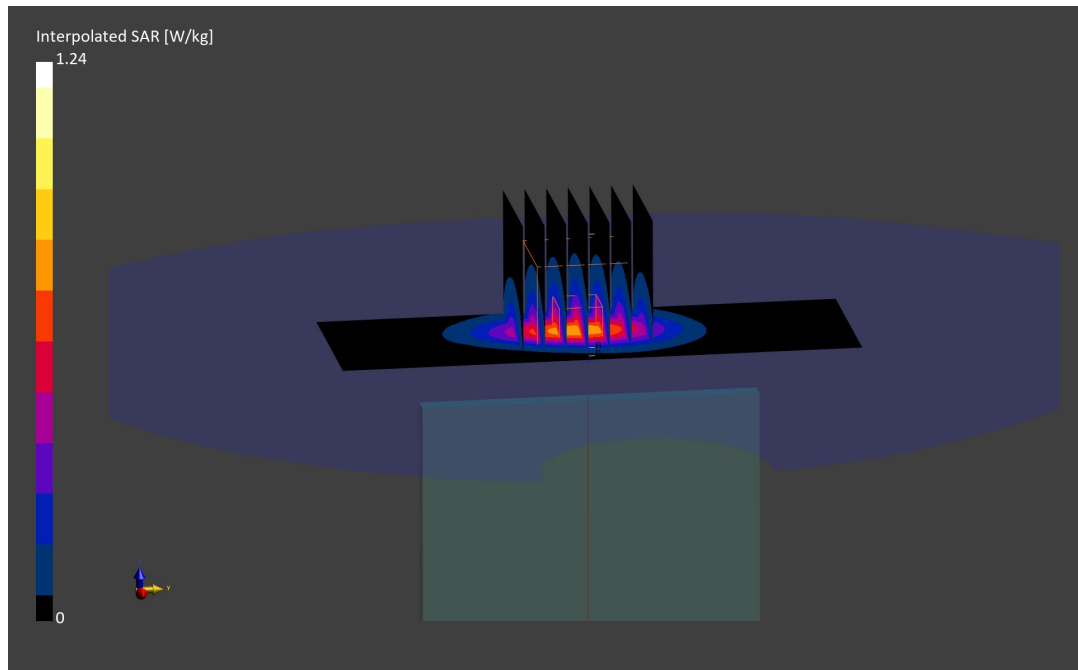

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26747

Communication System: UID:10297 - AAD, LTE-FDD; MAIA: Y; Frequency: 2510.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2510.0 MHz; cond = 1.91 S/m; perm = 39.2; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 07/05/2023; Ambient Temp: 20.3°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7565; ConvF:(7.08,7.08,7.08); Calibrated: 2023-01-12

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1466; Calibrated: 2023-01-20

Phantom: Twin-SAM V5.0; Serial: 1868

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 7, Antenna B, Body SAR, Bottom Edge, Low Ch.,
20 MHz Bandwidth, QPSK, 50 RB, 25 RB Offset**

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.40 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.857 W/kg

SAR(1 g) = 0.438 W/kg

Smallest distance from peaks to all points 3 dB below is 12.0 mm

Ratio of SAR at M2 to SAR at M1 = 80.2 %

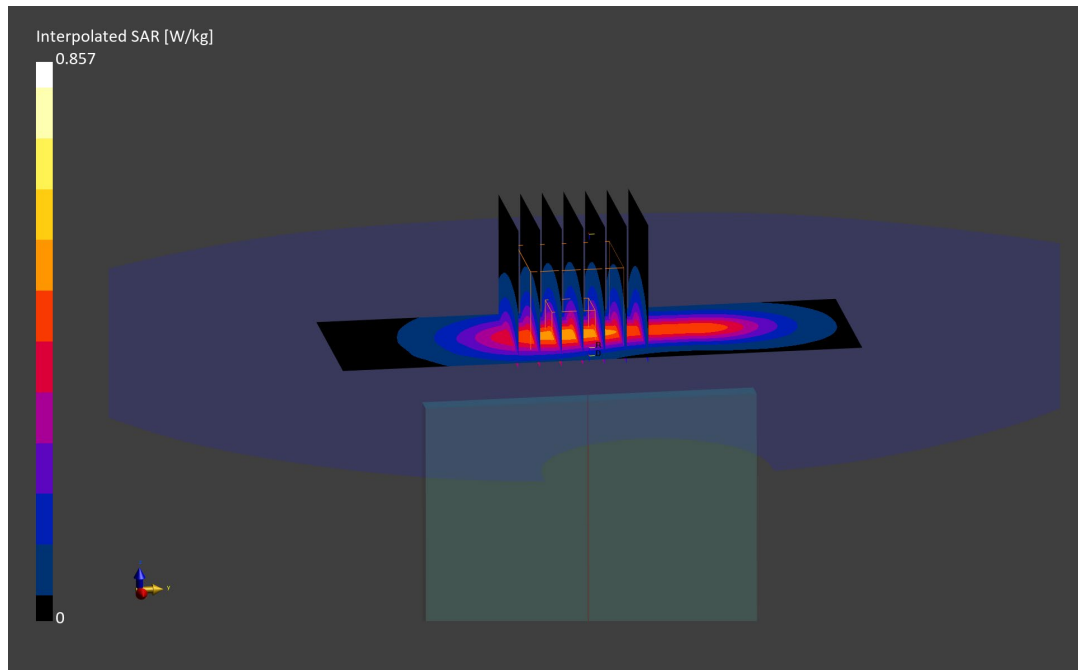

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26424

Communication System: UID:10172 - CAG, LTE-TDD; MAIA: Y; Frequency: 2680.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2680.0 MHz; cond = 2.00 S/m; perm = 37.2; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 07/12/2023; Ambient Temp: 20.4°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7565; ConvF:(6.89,6.89,6.89); Calibrated: 2023-01-12

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1466; Calibrated: 2023-01-20

Phantom: Twin-SAM V5.0; Serial: 1868

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 41, HPUE, Antenna B, Body SAR, Bottom Edge, High Ch.,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.72 W/kg; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 0.776 W/kg

Smallest distance from peaks to all points 3 dB below is 11.0 mm

Ratio of SAR at M2 to SAR at M1 = 77.4 %

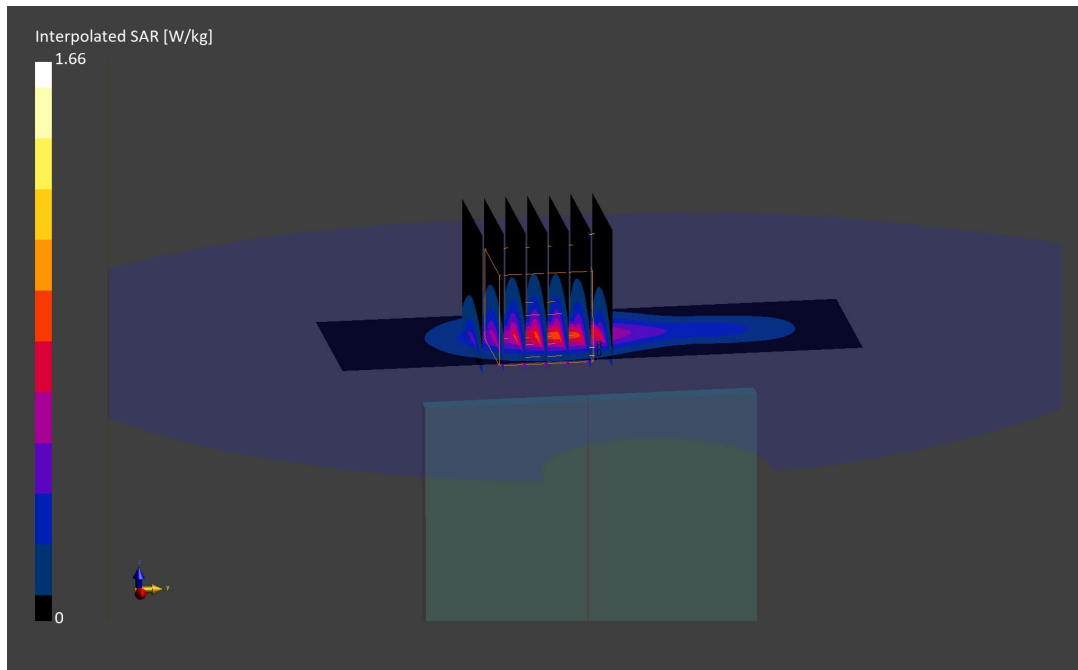

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 25913

Communication System: UID:10435 - AAF, LTE-TDD; MAIA: Y; Frequency: 3560.0 MHz

Medium: 3600 Head; Medium parameters used:

f = 3560.0 MHz; cond = 2.86 S/m; perm = 37.7; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/12/2023; Ambient Temp: 22.0°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7406; ConvF:(7.06,7.06,7.06); Calibrated: 2022-07-18

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1677; Calibrated: 2022-07-18

Phantom: Twin-SAM V8.0; Serial: 2064

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 48, Antenna F, Body SAR, Top Edge, Low Ch.,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.5


Reference Value = 0.18 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.442 W/kg

SAR(1 g) = 0.175 W/kg

Smallest distance from peaks to all points 3 dB below is 10.0 mm

Ratio of SAR at M2 to SAR at M1 = 73.9 %

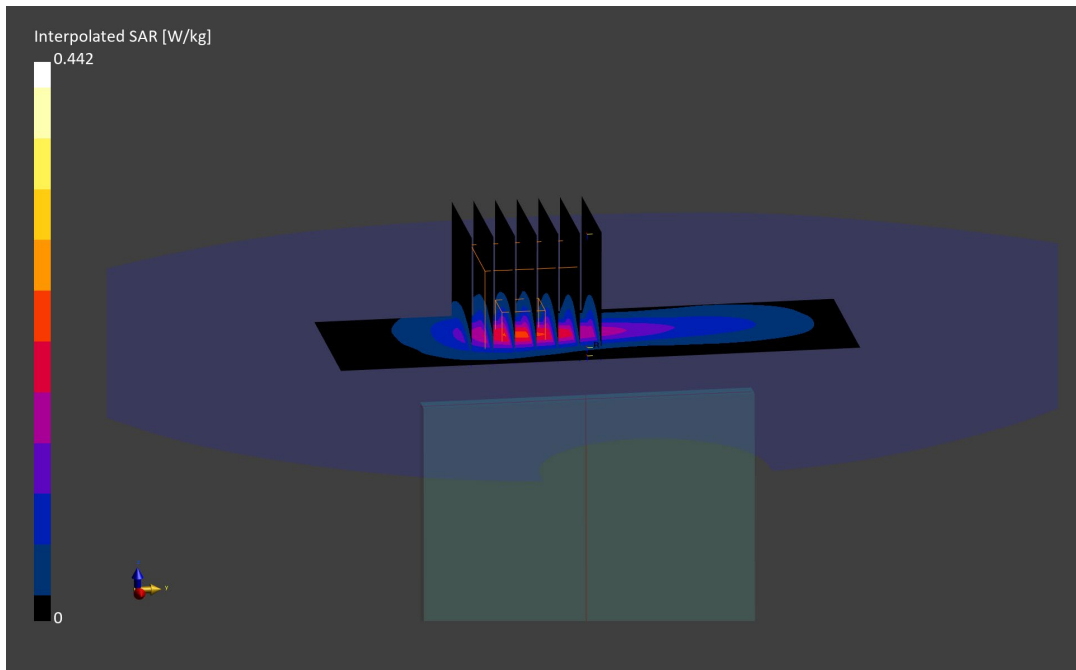

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 25772

Communication System: UID:10773 - AAD, CW; MAIA: Y; Frequency: 1745.0 MHz

Medium: 1750 Head; Medium parameters used:

f = 1745.0 MHz; cond = 1.31 S/m; perm = 40.4; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/13/2023; Ambient Temp: 21.6°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7410; ConvF:(8.34,8.34,8.34); Calibrated: 2022-07-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1583; Calibrated: 2022-07-18

Phantom: Twin-SAM V8.0; Serial: 1630

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: NR Band n66, Antenna A, Body SAR, Bottom Edge, Ch. 349000,
40 MHz Bandwidth, CP-OFDM QPSK, 1 RB, 1 RB Offset**

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 1.30 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.15 W/kg

SAR(1 g) = 1.12 W/kg

Smallest distance from peaks to all points 3 dB below is 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 83.0 %

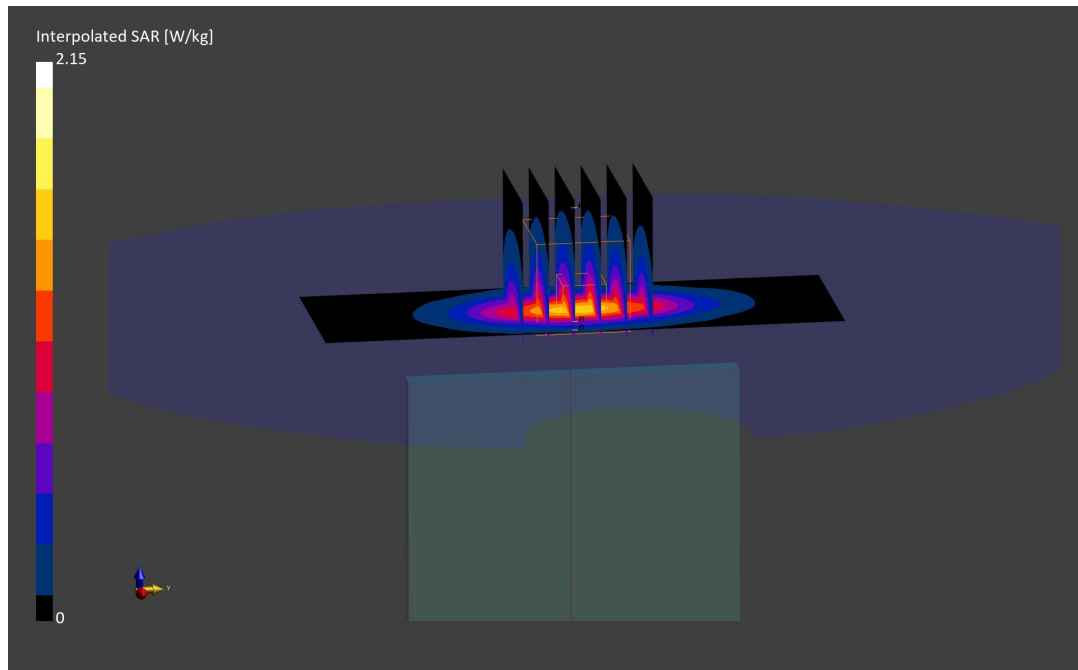

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26549

Communication System: UID:10773 - AAD, CW; MAIA: Y; Frequency: 1882.5 MHz

Medium: 1900 Head; Medium parameters used:

f = 1882.5 MHz; cond = 1.39 S/m; perm = 39.5; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/12/2023; Ambient Temp: 22.5°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7570; ConvF:(8.28,8.28,8.28); Calibrated: 2023-01-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1558; Calibrated: 2023-01-17

Phantom: Twin-SAM V8.0; Serial: 2060

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: NR Band n25, Antenna F, Body SAR, Top Edge, Ch. 376500,
40 MHz Bandwidth, CP-OFDM QPSK, 1 RB, 1 RB Offset**

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.69 W/kg; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.682 W/kg

Smallest distance from peaks to all points 3 dB below is 12.0 mm

Ratio of SAR at M2 to SAR at M1 = 81.4 %

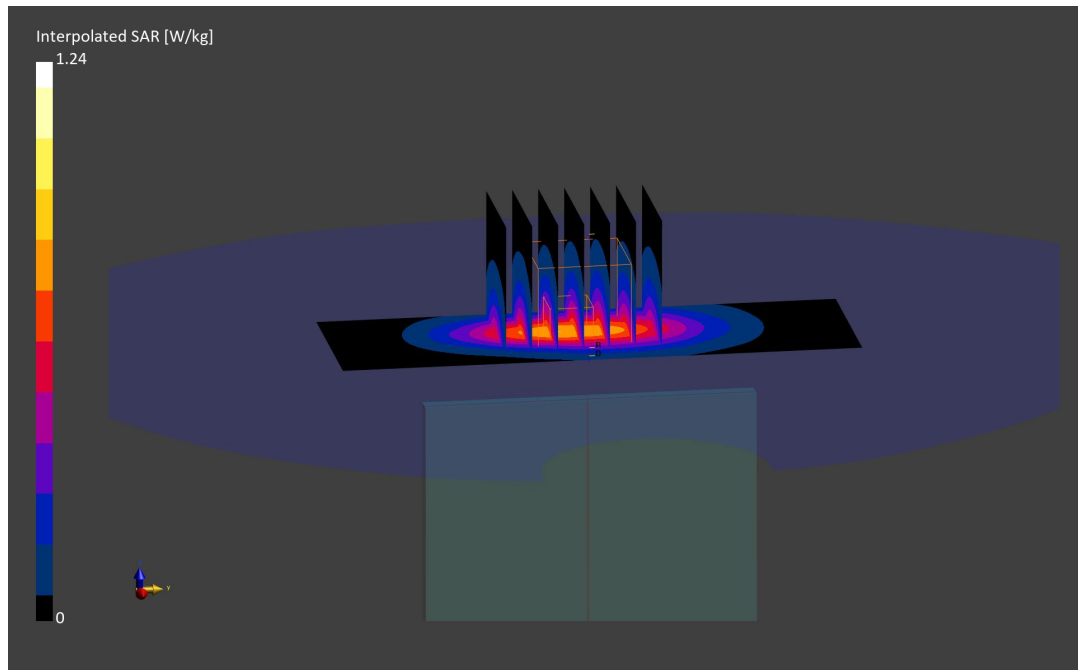

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26549

Communication System: UID:10768 - AAD, CW; MAIA: Y; Frequency: 2310.0 MHz
Medium: 2450 Head; Medium parameters used:
f = 2310.0 MHz; cond = 1.75 S/m; perm = 39.6; density = 1000 kg/m³
Phantom Section: Flat; Space: 10.00 mm

Test Date: 7/21/2023; Ambient Temp: 22.1°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7713; ConvF:(8.53,8.53,8.53); Calibrated: 2023-01-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1530; Calibrated: 2023-01-18
Phantom: Twin-SAM V8.0; Serial: 2065
Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: NR Band n30, Antenna A, Body SAR, Bottom Edge, Ch. 462000,
10 MHz Bandwidth, CP-OFDM QPSK, 1 RB, 1 RB Offset**

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.76 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.611 W/kg

Smallest distance from peaks to all points 3 dB below is 10.0 mm

Ratio of SAR at M2 to SAR at M1 = 80.5 %

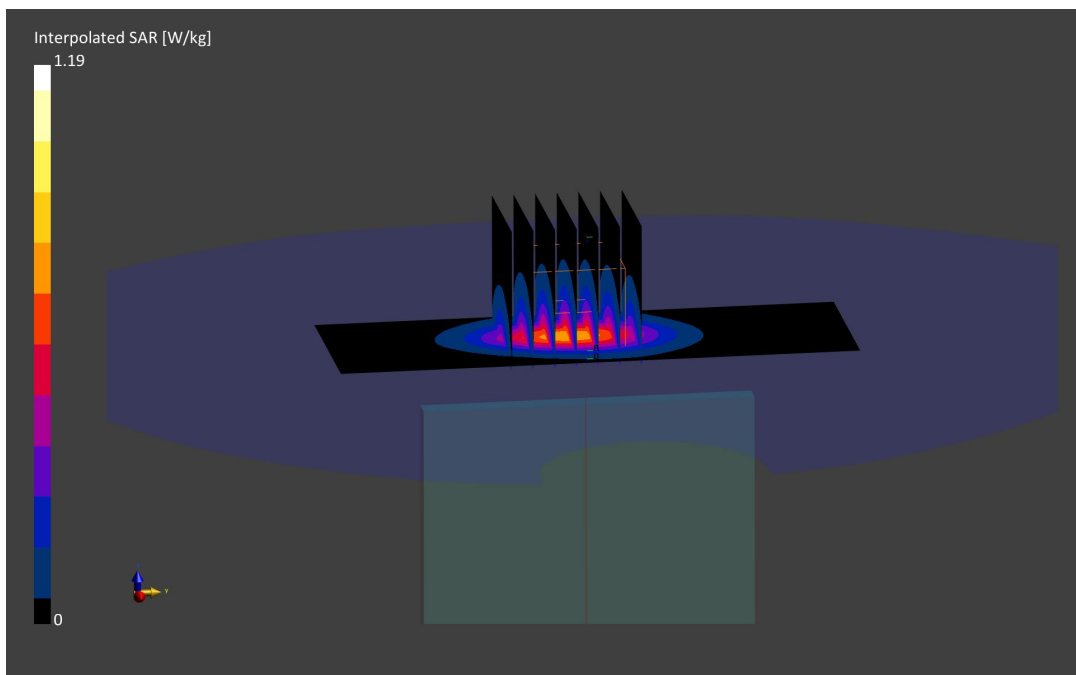

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26366

Communication System: UID:10803 - AAD, 5G NR FR1 TDD; MAIA: Y; Frequency: 2593.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2593.0 MHz; cond = 1.89 S/m; perm = 38.0; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/21/2023; Ambient Temp: 24.9°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN3837; ConvF:(7.15,7.15,7.15); Calibrated: 2023-01-17

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn793; Calibrated: 2023-01-17

Phantom: Twin-SAM V8.0; Serial: 1944

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: NR Band n41, Antenna B, Body SAR, Bottom Edge,
Ch. 518598, 100 MHz Bandwidth, CP-OFDM QPSK, 1 RB, 1 RB Offset**

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.47 W/kg; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.522 W/kg

Smallest distance from peaks to all points 3 dB below is 12.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.6 %

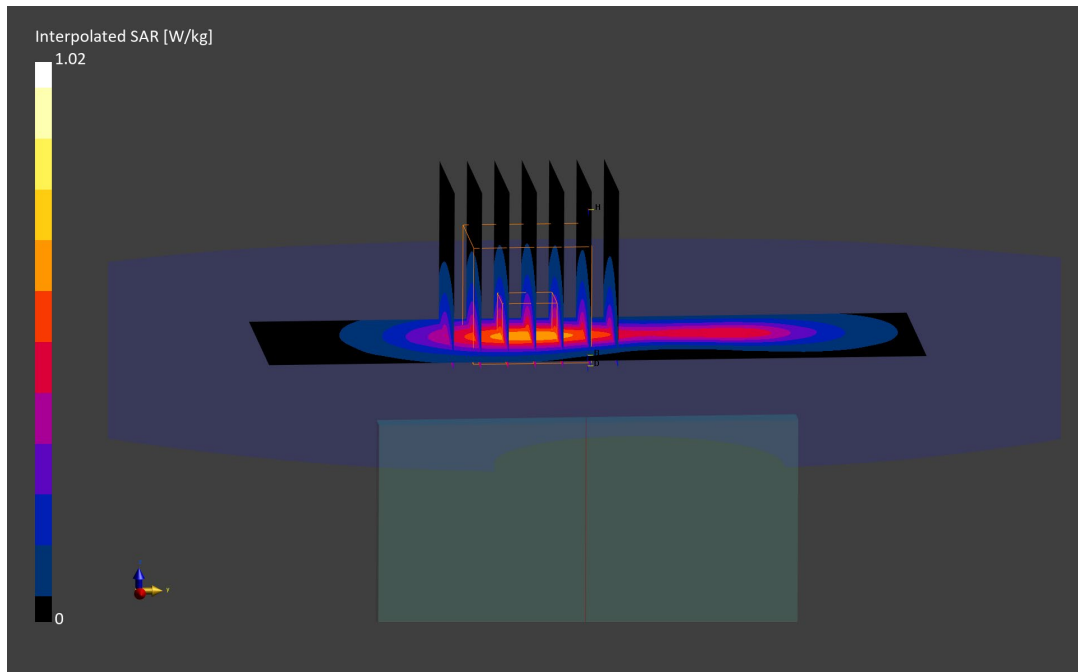

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26903

Communication System: UID:10797 - AAD, 5G NR FR1 TDD; MAIA: Y; Frequency: 3680.0 MHz

Medium: 3600 Head; Medium parameters used:

f = 3680.0 MHz; cond = 2.96 S/m; perm = 36.4; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 06/19/2023; Ambient Temp: 19.9°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7638; ConvF:(6.99,6.99,6.99); Calibrated: 2023-03-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1408; Calibrated: 2023-03-13

Phantom: Twin-SAM V8.0; Serial: 1357

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: NR Band n48, Antenna F, Body SAR, Top Edge, Ch. 645332,
40 MHz Bandwidth, CP-OFDM QPSK, 1 RB, 1 RB Offset**

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.5


Reference Value = 0.31 W/kg; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.472 W/kg

SAR(1 g) = 0.180 W/kg

Smallest distance from peaks to all points 3 dB below is 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 72.9 %

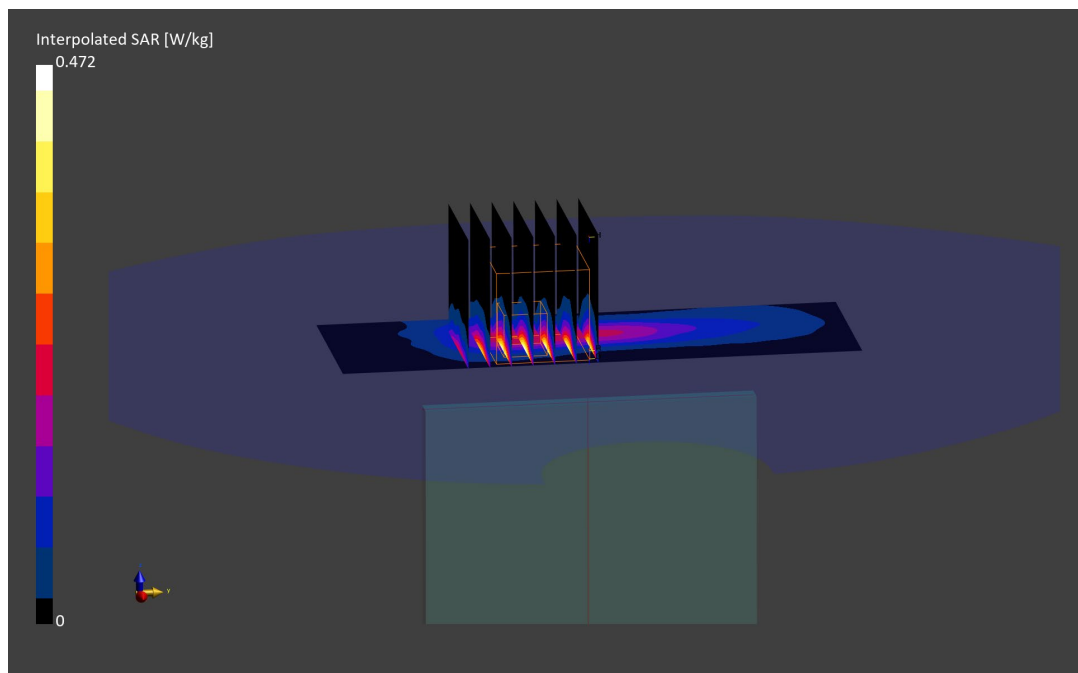

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 29519

Communication System: UID:10415 - AAA, WLAN; MAIA: Y; Frequency: 2462.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2462.0 MHz; cond = 1.85 S/m; perm = 37.3; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 07/02/2023; Ambient Temp: 23.5°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7570; ConvF:(7.55,7.55,7.55); Calibrated: 2023-01-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1558; Calibrated: 2023-01-17

Phantom: Twin-SAM V8.0; Serial: 2060

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: IEEE 802.11b, 22 MHz Bandwidth, MIMO, Body SAR, Left Edge, Ch. 11, 1 Mbps

Area Scan (40.0 x 200.0): Measurement grid: dx=5.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.30 W/kg; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.599 W/kg

SAR(1 g) = 0.292 W/kg

Smallest distance from peaks to all points 3 dB below is 11.0 mm

Ratio of SAR at M2 to SAR at M1 = 77.9 %

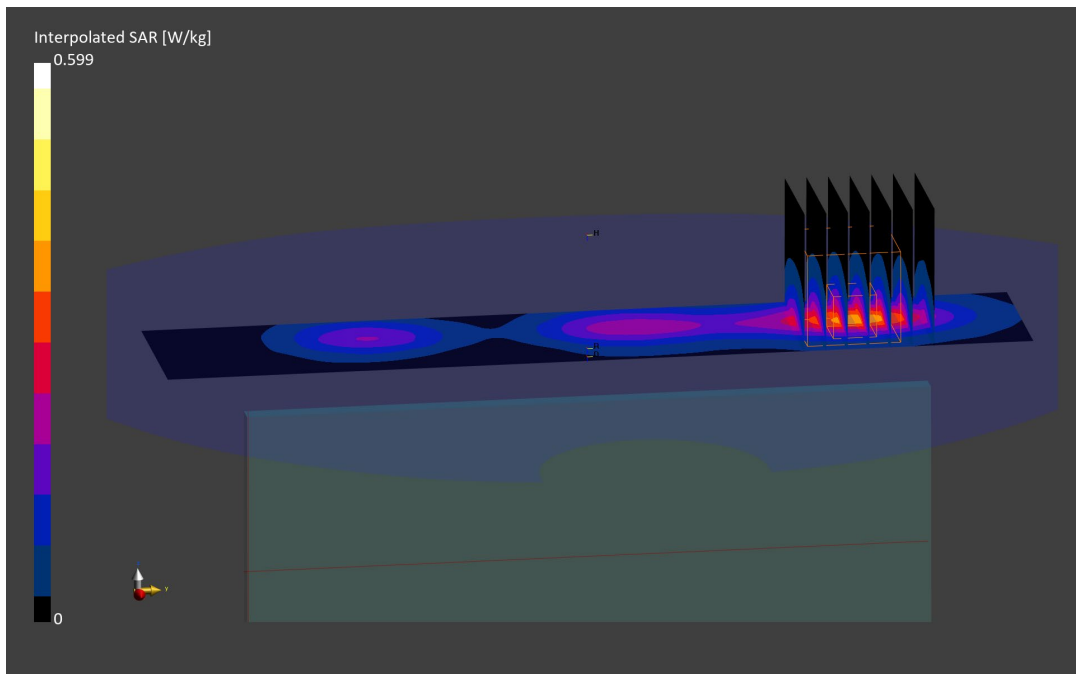

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26655

Communication System: UID:10011 - CAB, WCDMA; MAIA: Y; Frequency: 1752.6 MHz

Medium: 1750 Head; Medium parameters used:

f = 1752.6 MHz; cond = 1.37 S/m; perm = 38.7; density = 1000 kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/20/2023; Ambient Temp: 20.1°C; Tissue Temp: 19.6°C

Probe: EX3DV4 - SN7565; ConvF:(8.23,8.23,8.23); Calibrated: 2023-01-12

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1466; Calibrated: 2023-01-20

Phantom: Twin-SAM V5.0; Serial: 1868

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: UMTS 1750, Antenna A, Phablet SAR, Bottom Edge, High Ch.

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=10.0 mm

Zoom Scan (30.4 x 45.6 x 30.0): Measurement grid: dx=3.8 mm, dy=3.8 mm, dz=1.4 mm; Graded Ratio: 1.4


Reference Value = 2.66 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 10.9 W/kg

SAR(10 g) = 1.29 W/kg

Smallest distance from peaks to all points 3 dB below is 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 64.5 %

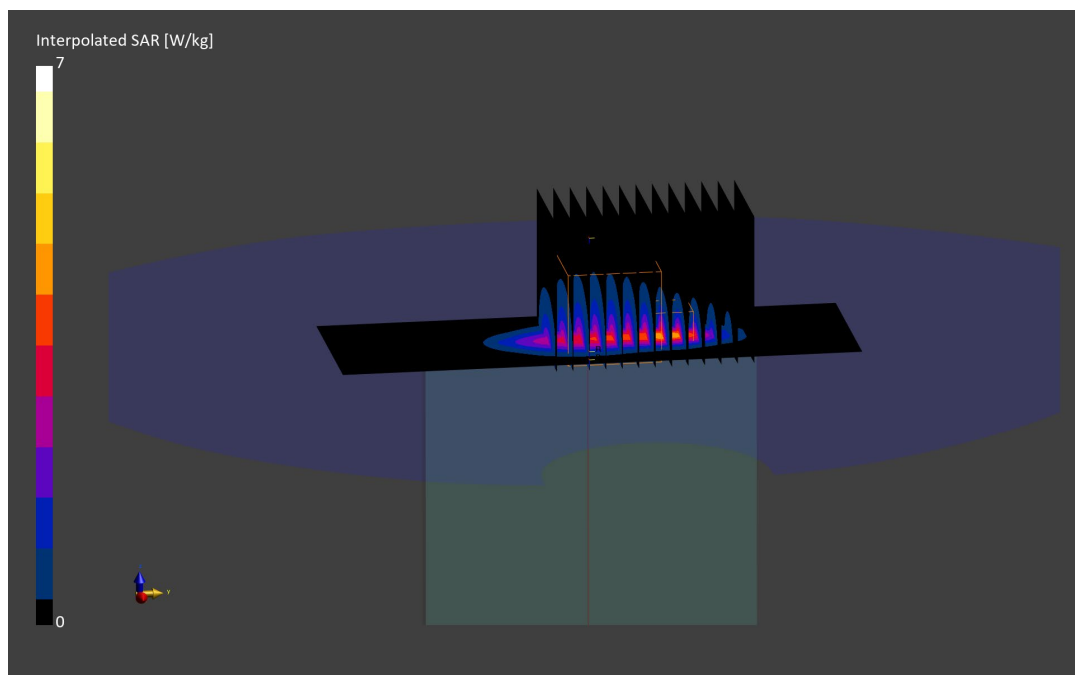

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26655

Communication System: UID:10011 - CAB, WCDMA; MAIA: Y; Frequency: 1852.4 MHz

Medium: 1900 Head; Medium parameters used:

f = 1852.4 MHz; cond = 1.36 S/m; perm = 40.5; density = 1000 kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/14/2023; Ambient Temp: 22.3°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7547; ConvF:(7.81,7.81,7.81); Calibrated: 2022-10-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1322; Calibrated: 2022-10-17

Phantom: Twin-SAM V8.0; Serial: 1934

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: UMTS 1900, Antenna A, Phablet SAR, Bottom Edge, Low Ch.

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.5 mm, dy=5.5 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 3.07 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 6.66 W/kg

SAR(10 g) = 1.26 W/kg

Smallest distance from peaks to all points 3 dB below is 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 67.9 %

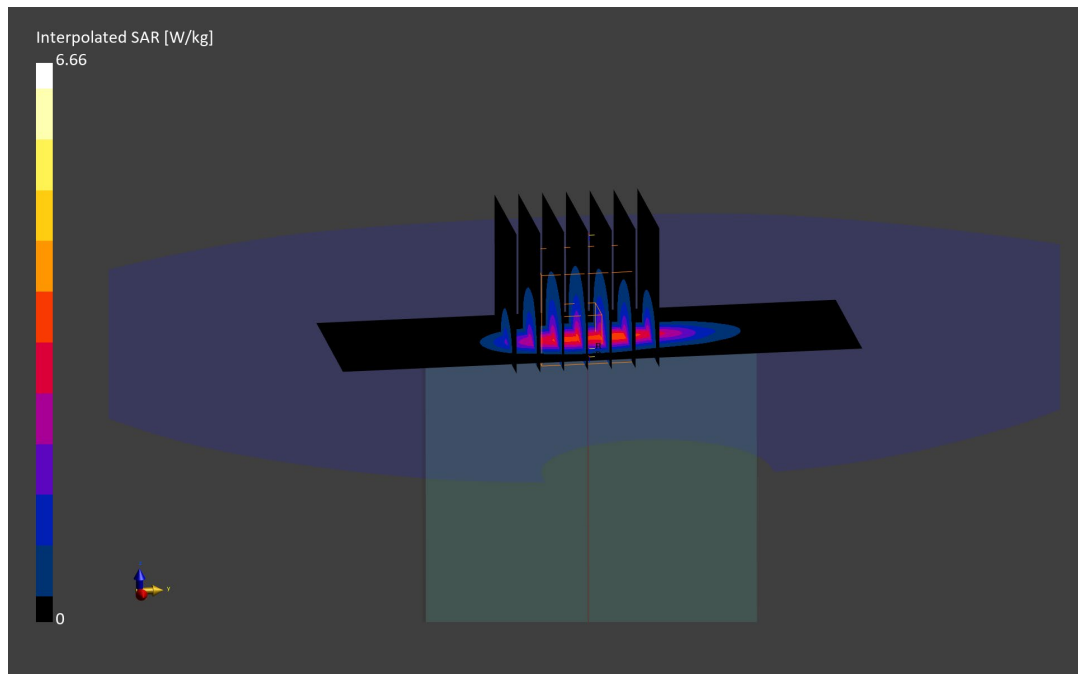

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26218

Communication System: UID:10100 - CAE, LTE-FDD; MAIA: Y; Frequency: 1720.0 MHz

Medium: 1750 Head; Medium parameters used:

f = 1720.0 MHz; cond = 1.42 S/m; perm = 39.4; density = 1000 kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/29/2023; Ambient Temp: 21.9°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7547; ConvF:(8.16,8.16,8.16); Calibrated: 2022-10-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1322; Calibrated: 2022-10-17

Phantom: Twin-SAM V8.0; Serial: 1934

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 66, Antenna F, Phablet SAR, Top Edge,
Low Ch., 20 MHz Bandwidth, QPSK, 100 RB, 0 RB Offset**

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=3.8 mm, dy=3.8 mm, dz=1.4 mm; Graded Ratio: 1.4


Reference Value = 4.52 W/kg; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 13.1 W/kg

SAR(10 g) = 1.71 W/kg

Smallest distance from peaks to all points 3 dB below is 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 70.0 %

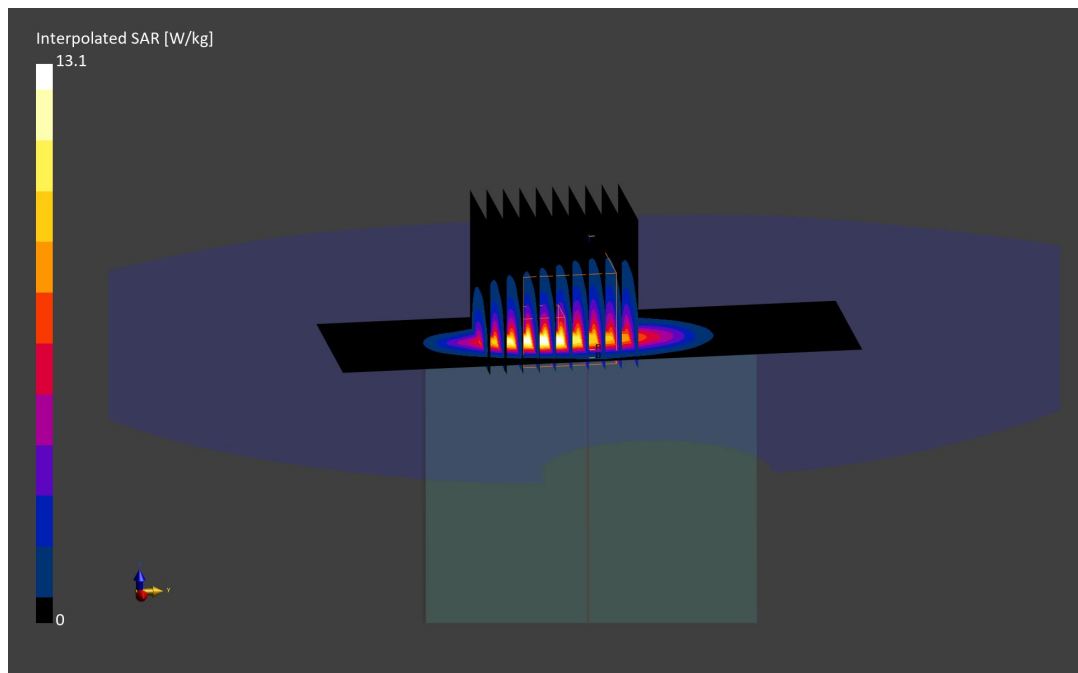

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26531

Communication System: UID:10297 - AAD, LTE-FDD; MAIA: Y; Frequency: 1882.5 MHz

Medium: 1900 Head; Medium parameters used:

f = 1882.5 MHz; cond = 1.39 S/m; perm = 39.1; density = 1000 kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/19/2023; Ambient Temp: 21.4°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7410; ConvF:(8.04,8.04,8.04); Calibrated: 2022-07-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1583; Calibrated: 2022-07-18

Phantom: Twin-SAM V8.0; Serial: 1630

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 25, Antenna F, Phablet SAR, Top Edge, Mid Ch.,
20 MHz Bandwidth, QPSK, 50 RB, 25 RB Offset**

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=15.0 mm

Zoom Scan (34.4 x 34.4 x 30.0): Measurement grid: dx=4.3 mm, dy=4.3 mm, dz=1.4 mm; Graded Ratio: 1.4


Reference Value = 4.55 W/kg; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 13.1 W/kg

SAR(10 g) = 1.40 W/kg

Smallest distance from peaks to all points 3 dB below is 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 64.7 %

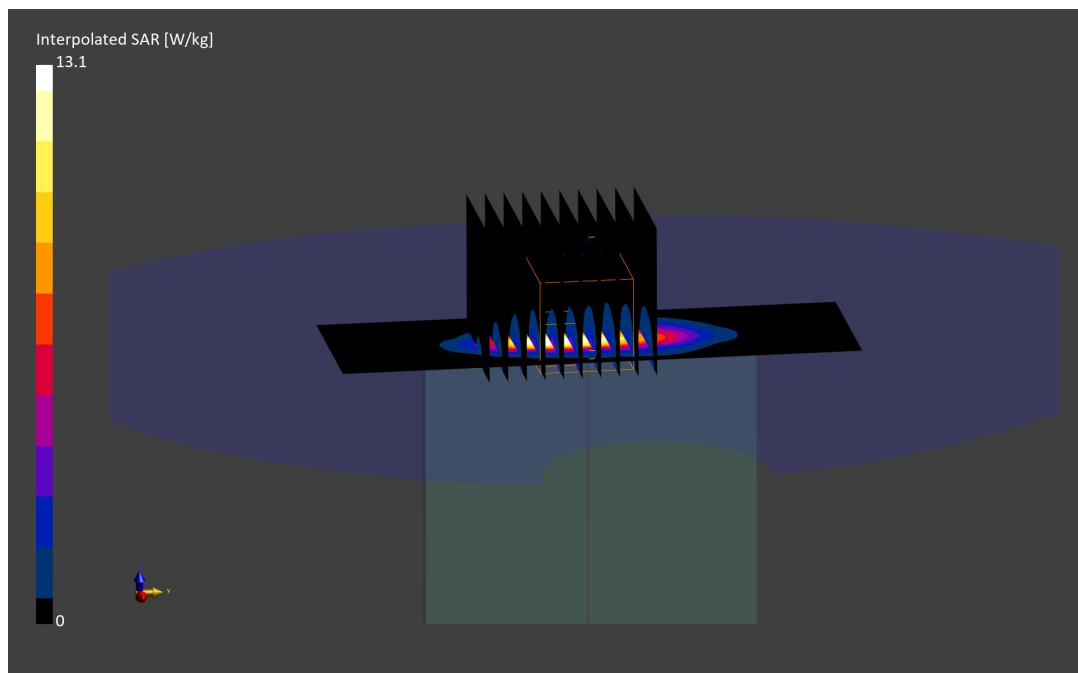

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26598

Communication System: UID:10175 - CAG, LTE-FDD; MAIA: Y; Frequency: 2310.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2310.0 MHz; cond = 1.69 S/m; perm = 38.2; density = 1000 kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/18/2023; Ambient Temp: 22.9°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7570; ConvF:(7.95,7.95,7.95); Calibrated: 2023-01-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1558; Calibrated: 2023-01-17

Phantom: Twin-SAM V8.0; Serial: 2060

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 30, Antenna A, Phablet SAR, Bottom Edge, Mid Ch.,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 2.90 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 6.62 W/kg

SAR(10 g) = 1.14 W/kg

Smallest distance from peaks to all points 3 dB below is 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 74.9 %

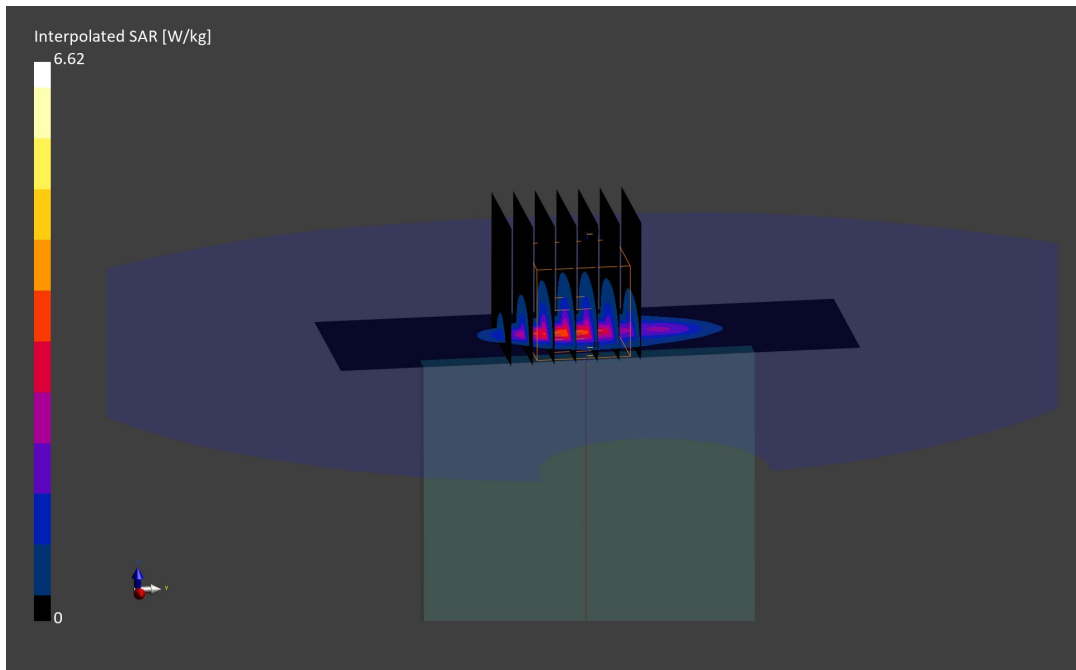

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26747

Communication System: UID:10169 - CAE, LTE-FDD; MAIA: Y; Frequency: 2510.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2510.0 MHz; cond = 1.91 S/m; perm = 39.2; density = 1000 kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/05/2023; Ambient Temp: 20.3°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7565; ConvF:(7.08,7.08,7.08); Calibrated: 2023-01-12

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1466; Calibrated: 2023-01-20

Phantom: Twin-SAM V5.0; Serial: 1868

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 7, Antenna B, Phablet SAR, Bottom Edge, Low Ch.,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=4.5 mm, dy=4.5 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 4.97 W/kg; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 17.8 W/kg

SAR(10 g) = 1.77 W/kg

Smallest distance from peaks to all points 3 dB below is 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 66.5 %

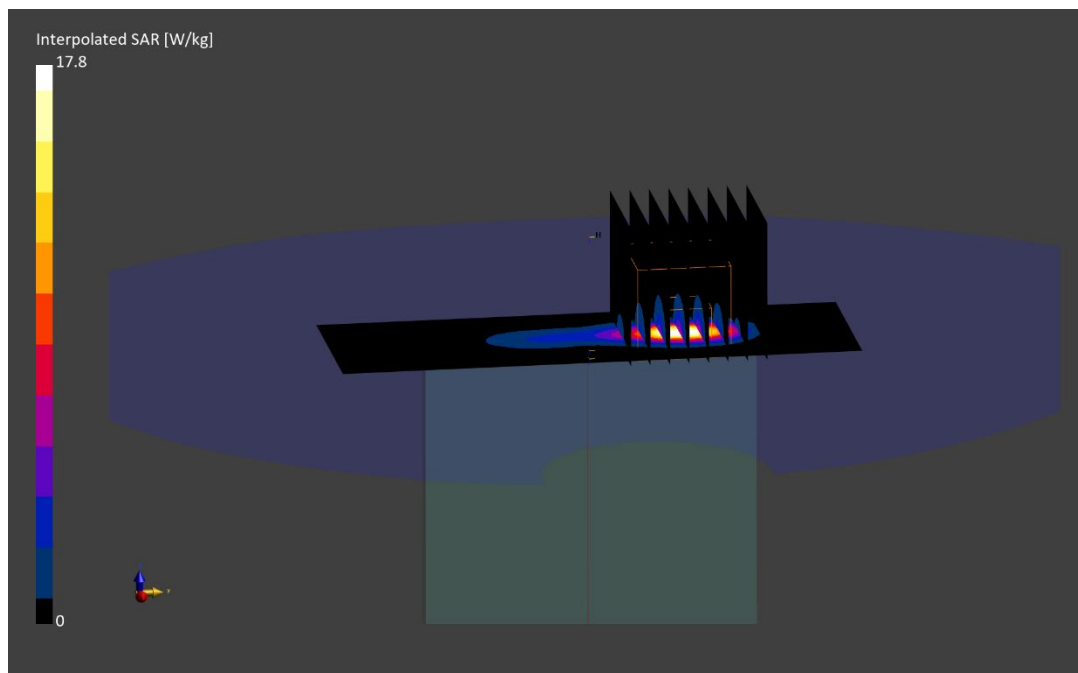

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26424

Communication System: UID:10172 - CAG, LTE-TDD; MAIA: Y; Frequency: 2636.5 MHz

Medium: 2450 Head; Medium parameters used:

f = 2636.5 MHz; cond = 1.99 S/m; perm = 37.6; density = 1000 kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/19/2023; Ambient Temp: 19.5°C; Tissue Temp: 19.9°C

Probe: EX3DV4 - SN7565; ConvF:(6.89,6.89,6.89); Calibrated: 2023-01-12

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1466; Calibrated: 2023-01-20

Phantom: Twin-SAM V5.0; Serial: 1868

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 41, HPUE, Antenna B, Phablet SAR, Bottom Edge,
Mid-High Ch., 20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=4.3 mm, dy=4.3 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 5.39 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 19.3 W/kg

SAR(10 g) = 1.84 W/kg

Smallest distance from peaks to all points 3 dB below is 5.2 mm

Ratio of SAR at M2 to SAR at M1 = 66.7 %

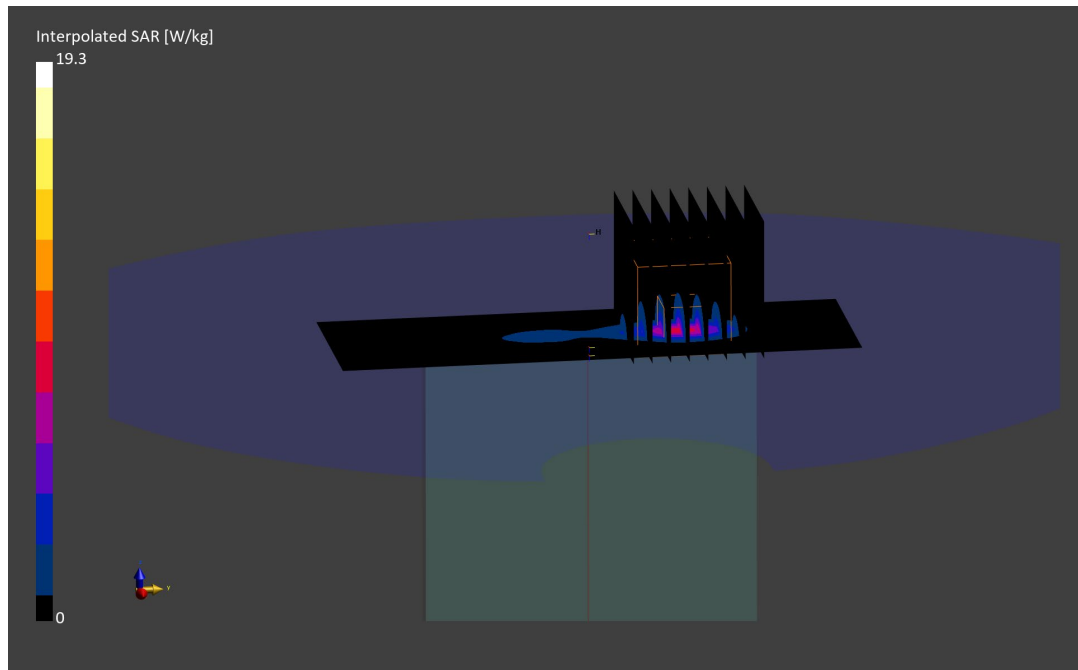

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26549

Communication System: UID:10773 - AAD, CW; MAIA: Y; Frequency: 1745.0 MHz
Medium: 1750 Head; Medium parameters used:
f = 1745.0 MHz; cond = 1.31 S/m; perm = 40.4; density = 1000 kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/13/2023; Ambient Temp: 21.6°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7410; ConvF:(8.34,8.34,8.34); Calibrated: 2022-07-19
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1583; Calibrated: 2022-07-18
Phantom: Twin-SAM V8.0; Serial: 1630
Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: NR Band n66, Antenna F, Phablet SAR, Top Edge, Ch. 349000,
40 MHz Bandwidth, CP-OFDM QPSK, 1 RB, 1 RB Offset**

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=4.1 mm, dy=4.1 mm, dz=1.4 mm; Graded Ratio: 1.4


Reference Value = 5.41 W/kg; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 15.4 W/kg

SAR(10 g) = 1.71 W/kg

Smallest distance from peaks to all points 3 dB below is 5.0 mm

Ratio of SAR at M2 to SAR at M1 = 66.0 %

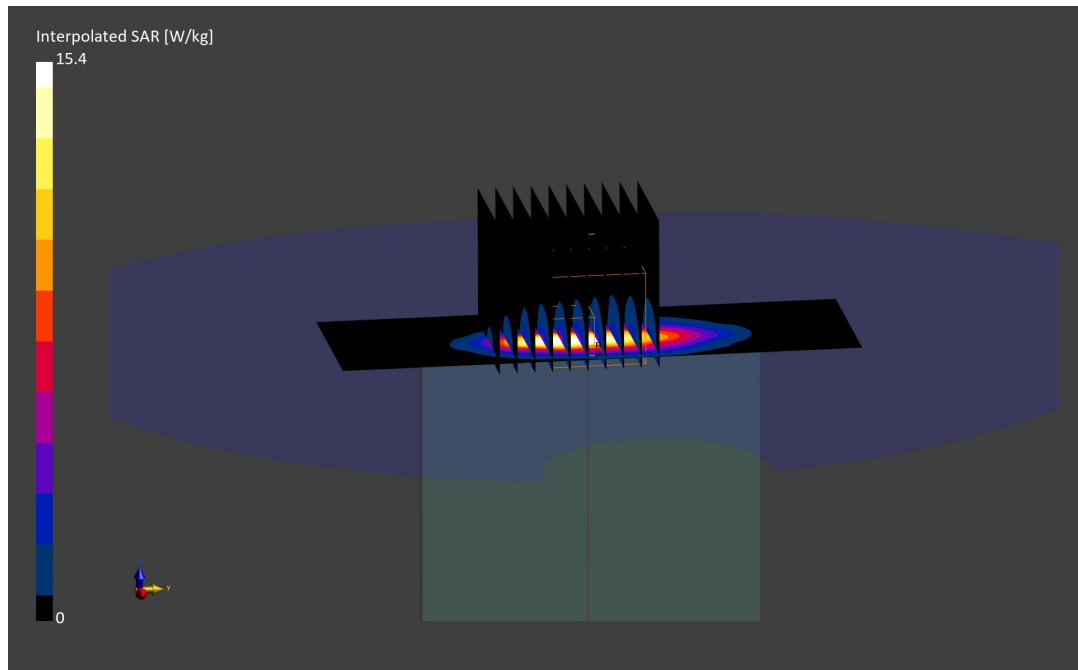

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26549

Communication System: UID:10773 - AAD, CW; MAIA: Y; Frequency: 1882.5 MHz

Medium: 1900 Head; Medium parameters used:

f = 1882.5 MHz; cond = 1.39 S/m; perm = 39.5; density = 1000 kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/12/2023; Ambient Temp: 22.5°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7570; ConvF:(8.28,8.28,8.28); Calibrated: 2023-01-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1558; Calibrated: 2023-01-17

Phantom: Twin-SAM V8.0; Serial: 2060

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: NR Band n25, Antenna F, Phablet SAR, Top Edge, Ch. 376500,
40 MHz Bandwidth, CP-OFDM QPSK, 1 RB, 1 RB Offset**

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=4.6 mm, dy=4.6 mm, dz=1.4 mm; Graded Ratio: 1.4


Reference Value = 5.28 W/kg; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 17.2 W/kg

SAR(10 g) = 2.16 W/kg

Smallest distance from peaks to all points 3 dB below is 5.0 mm

Ratio of SAR at M2 to SAR at M1 = 65.6 %

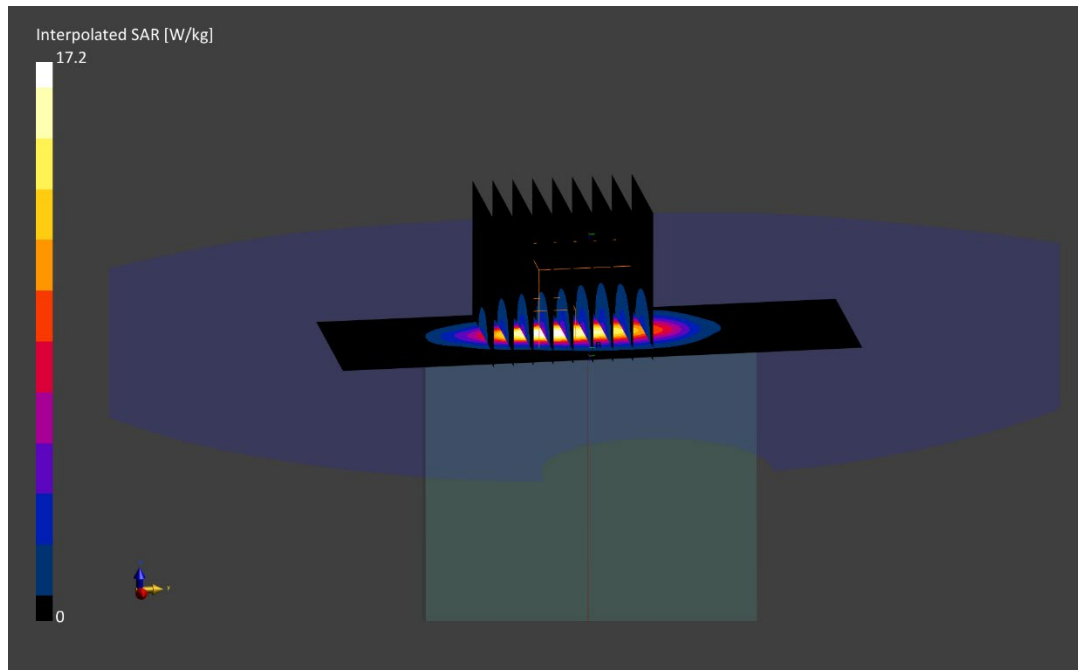

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26549

Communication System: UID:10768 - AAD, CW; MAIA: Y; Frequency: 2310.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2310.0 MHz; cond = 1.75 S/m; perm = 39.6; density = 1000 kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 7/21/2023; Ambient Temp: 22.1°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7713; ConvF:(8.53,8.53,8.53); Calibrated: 2023-01-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1530; Calibrated: 2023-01-18

Phantom: Twin-SAM V8.0; Serial: 2065

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: NR Band n30, Antenna A, Phablet SAR, Bottom Edge, Ch. 462000,
10 MHz Bandwidth, CP-OFDM QPSK, 1 RB, 1 RB Offset**

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 1.44 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.68 W/kg

SAR(10 g) = 0.485 W/kg

Smallest distance from peaks to all points 3 dB below is 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 74.0 %

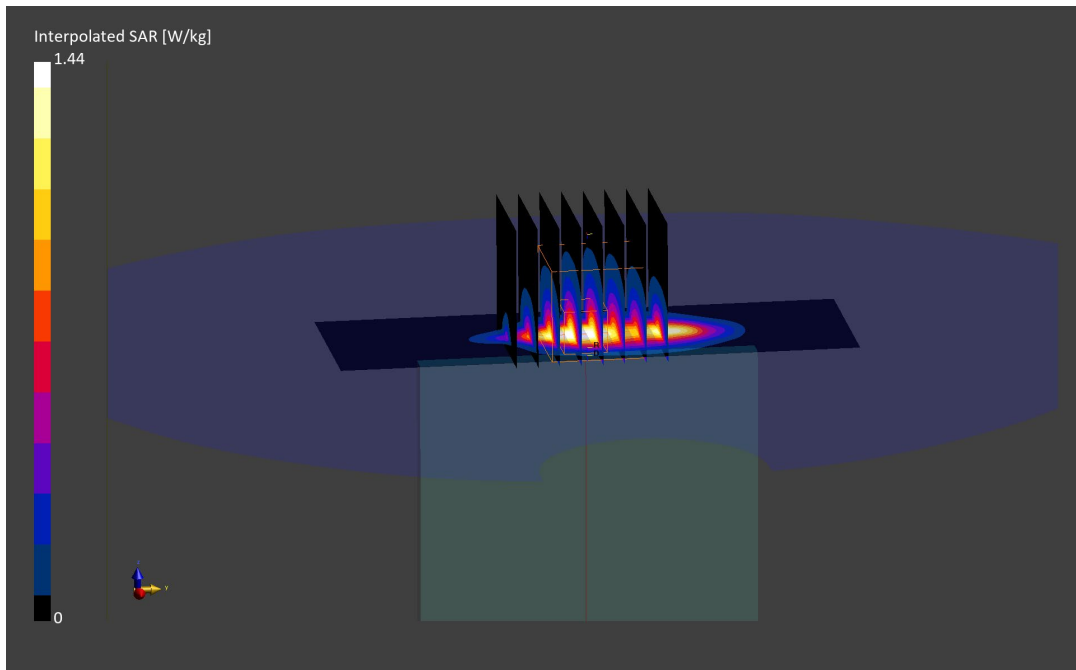

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 37611

Communication System: UID:10866 - AAD, 5G NR FR1 TDD; MAIA: Y; Frequency: 2593.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2593.0 MHz; cond = 1.89 S/m; perm = 37.8; density = 1000 kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/27/2023; Ambient Temp: 21.9°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7570; ConvF:(7.26,7.26,7.26); Calibrated: 2023-01-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1558; Calibrated: 2023-01-17

Phantom: Twin-SAM V8.0; Serial: 2060

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: NR Band n41, Antenna B, Phablet SAR, Back Side, Ch. 518598,
100 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 137 RB Offset**

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=4.3 mm, dy=4.3 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 3.04 W/kg; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 10.1 W/kg

SAR(10 g) = 1.16 W/kg

Smallest distance from peaks to all points 3 dB below is 5.3 mm

Ratio of SAR at M2 to SAR at M1 = 69.4 %

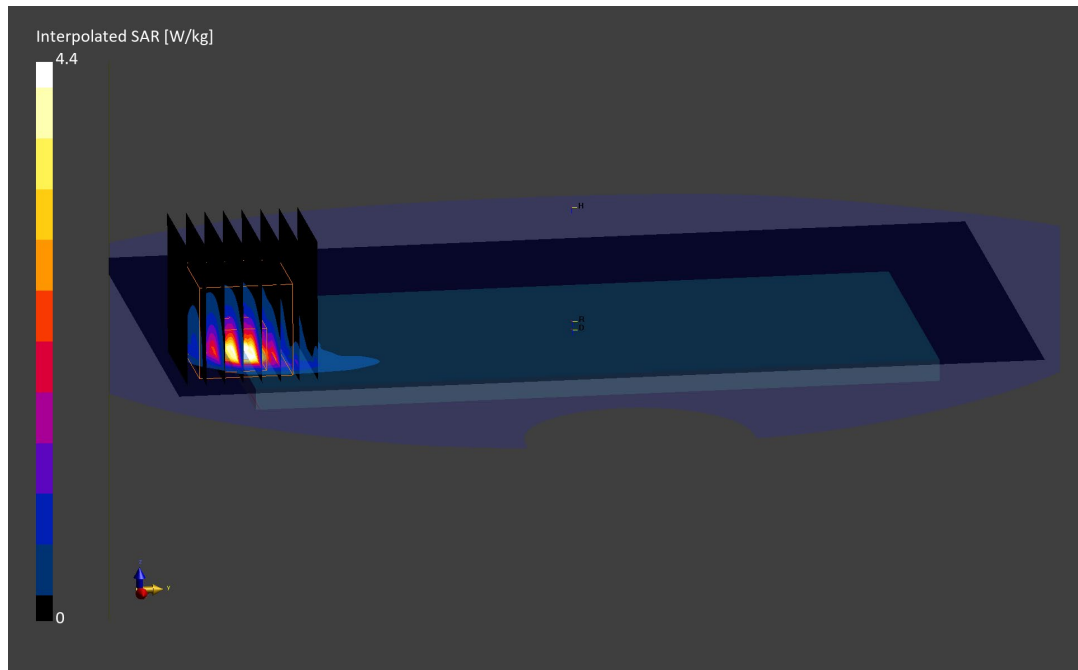

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26366

Communication System: UID:0 - -, CW; MAIA: Y; Frequency: 3500.0 MHz

Medium: 3600 Head; Medium parameters used:

f = 3500.0 MHz; cond = 2.79 S/m; perm = 37.3; density = 1000 kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/04/2023; Ambient Temp: 20.5°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7638; ConvF:(7.02,7.02,7.02); Calibrated: 2023-03-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1408; Calibrated: 2023-03-13

Phantom: Twin-SAM V8.0; Serial: 1357

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: NR Band n77 DoD, Antenna D, Phablet SAR, Back Side,
Ch. 633334, 100 MHz Bandwidth, CW/SRS**

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.5


Reference Value = 7.93 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 11.7 W/kg

SAR(10 g) = 1.40 W/kg

Smallest distance from peaks to all points 3 dB below is 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 84.5 %

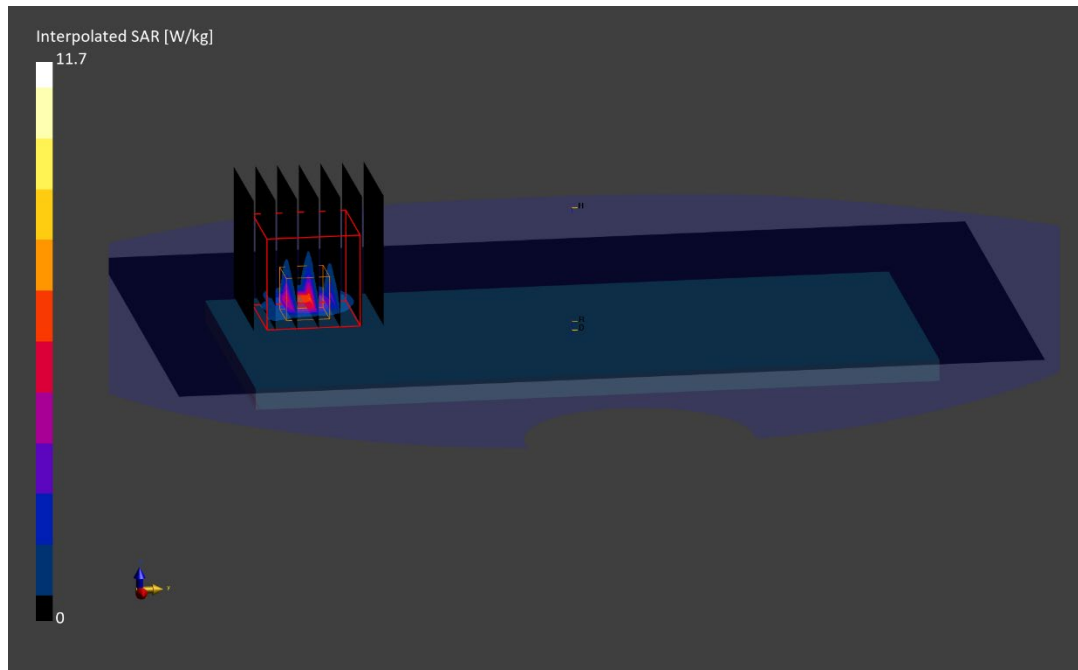

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 29568

Communication System: UID:10196 - CAD, WLAN; MAIA: Y; Frequency: 5320.0 MHz

Medium: 5200-5800 Head; Medium parameters used:

f = 5320.0 MHz; cond = 4.57 S/m; perm = 34.9; density = 1000 kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/27/2023; Ambient Temp: 23.9°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7570; ConvF:(5.52,5.52,5.52); Calibrated: 2023-01-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1558; Calibrated: 2023-01-17

Phantom: Twin-SAM V8.0; Serial: 2060

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: IEEE 802.11n, 20 MHz Bandwidth, UNII-2A, MIMO,
Ch. 64, Phablet SAR, Front Side, 13 Mbps**

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (33.6 x 33.6 x 22.0): Measurement grid: dx=2.1 mm, dy=2.1 mm, dz=1.4 mm; Graded Ratio: 1.4


Reference Value = 1.50 W/kg; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 13.6 W/kg

SAR(10 g) = 0.889 W/kg

Smallest distance from peaks to all points 3 dB below is 3.4 mm

Ratio of SAR at M2 to SAR at M1 = 55.1 %

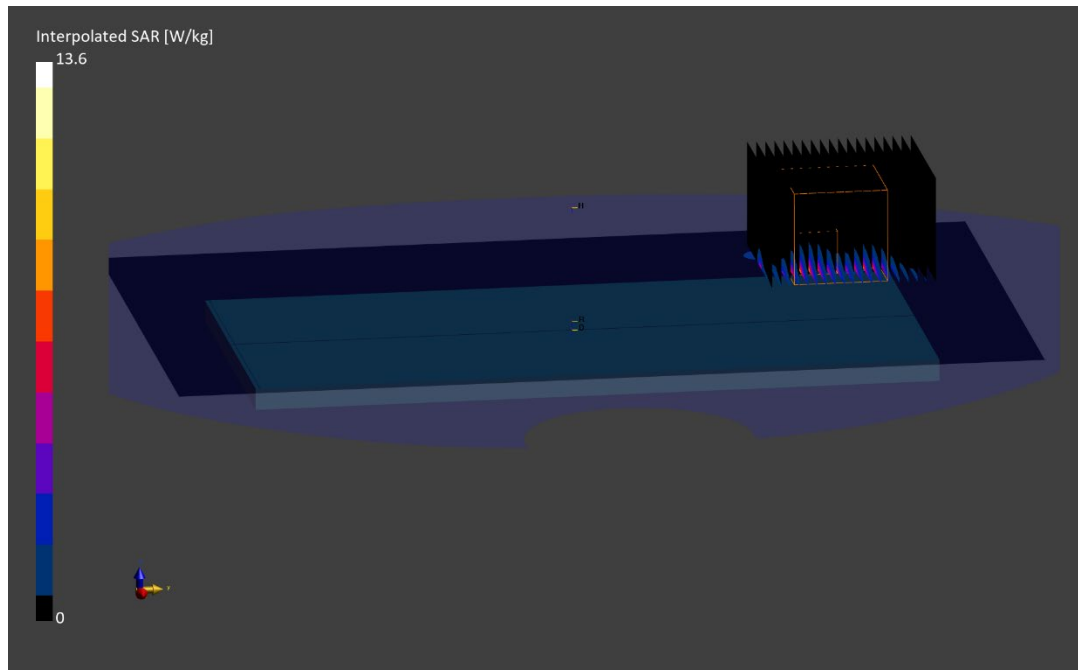

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 29568

Communication System: UID:10032 - CAA, Bluetooth; MAIA: Y; Frequency: 2402.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2402.0 MHz; cond = 1.77 S/m; perm = 38.8; density = 1000 kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/20/2023; Ambient Temp: 24.6°C; Tissue Temp: 22.9°C

Probe: EX3DV4 - SN7570; ConvF:(7.55,7.55,7.55); Calibrated: 2023-01-11

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1558; Calibrated: 2023-01-17

Phantom: Twin-SAM V8.0; Serial: 2060

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: Bluetooth, Antenna 2, Phablet SAR, Ch. 0, 1 Mbps, Front Side

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=3.6 mm, dy=3.6 mm, dz=1.4 mm; Graded Ratio: 1.4


Reference Value = 1.02 W/kg; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.69 W/kg

SAR(10 g) = 0.430 W/kg

Smallest distance from peaks to all points 3 dB below is 4.4 mm

Ratio of SAR at M2 to SAR at M1 = 65.2 %

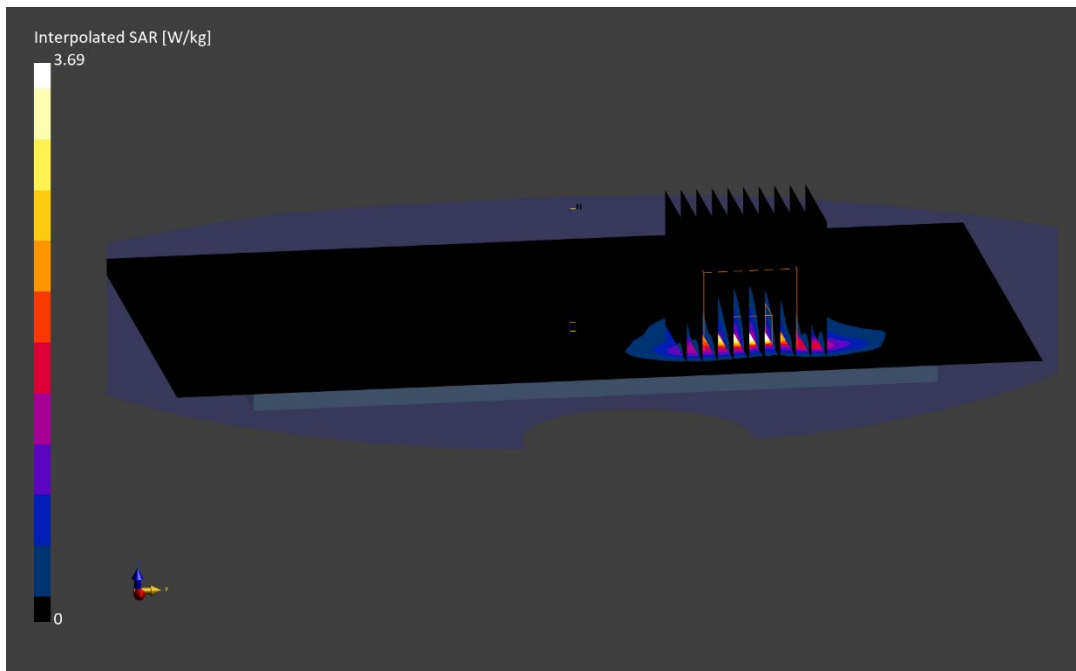

ELEMENT

DUT: A3LSMS711U; Type: Portable Handset; Serial: 26267

Communication System: UID:0 - -, CW; MAIA: Y; Frequency: 13.6 MHz
Medium: 30 Head; Medium parameters used:
f = 13.6 MHz; cond = 0.717 S/m; perm = 52.8; density = 1000 kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/06/2023; Ambient Temp: 21.6°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7417; ConvF:(18.67,18.67,18.67); Calibrated: 2023-02-08
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn665; Calibrated: 2023-02-15
Phantom: ELI V8.0; Serial: 2077
Measurement SW: DASY Module SAR V16.2.0.1425

Mode: NFC, Phablet SAR, Back Side

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (36.0 x 36.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Reference Value = 0.06 W/kg; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.205 W/kg

SAR(10 g) = 0.024 W/kg

Smallest distance from peaks to all points 3 dB below is 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 58.5 %

