


Date: 1.AUG.2023 08:54:57


Plot 7-246. Contention Based Protocol Timing Plot (20MHz (UNII Band 6) – Ch. 101)

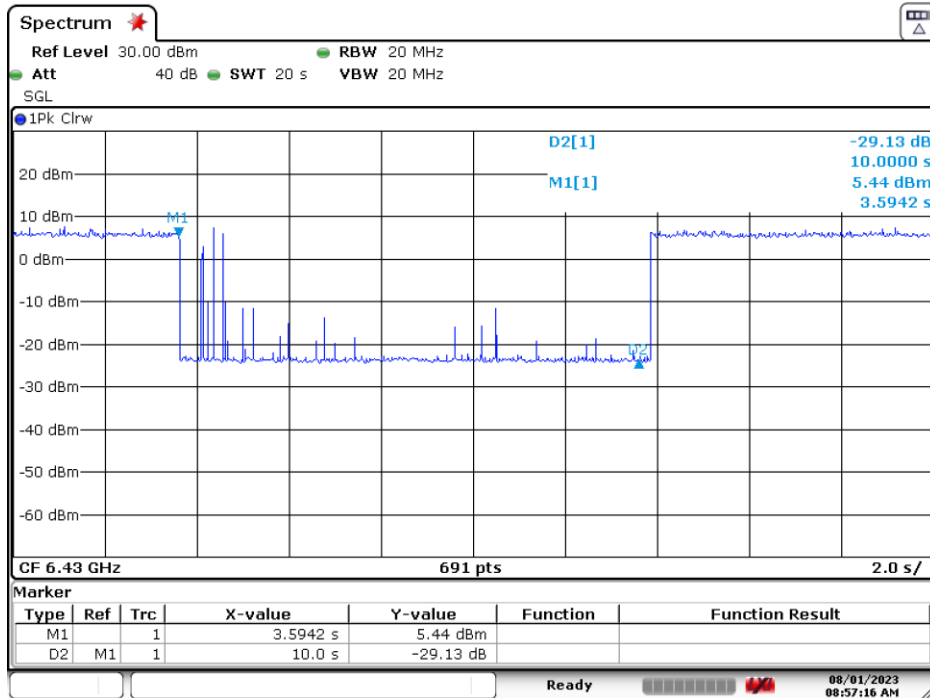

Date: 1.AUG.2023 08:57:16


Plot 7-247. Contention Based Protocol Timing Plot (160MHz (UNII Band 6) – Ch. 111 Low)

FCC ID: A3LSMS711U		MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset		Page 168 of 207

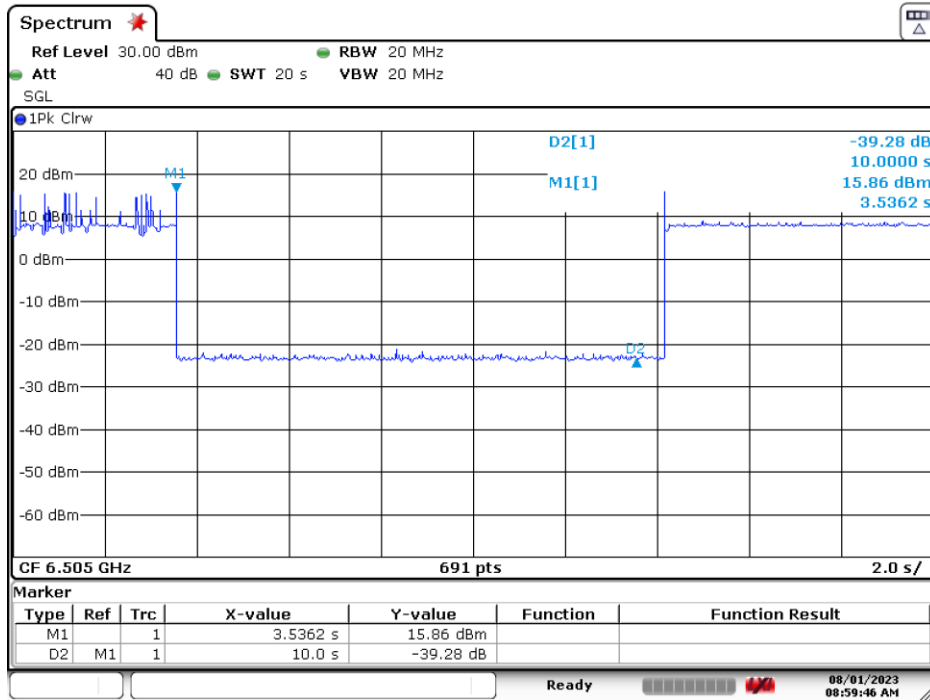

Date: 1.AUG.2023 08:59:46


Plot 7-248. Contention Based Protocol Timing Plot (160MHz (UNII Band 6) – Ch. 111 Mid)

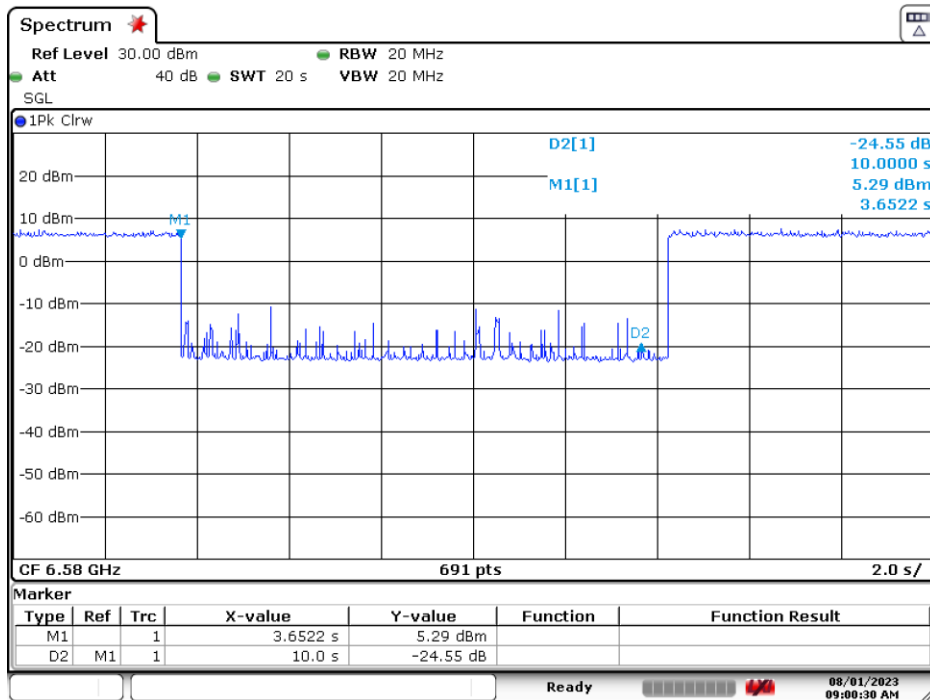

Date: 1.AUG.2023 09:00:30


Plot 7-249. Contention Based Protocol Timing Plot (160MHz (UNII Band 6) – Ch. 111 High)

FCC ID: A3LSMS711U		MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset		Page 169 of 207

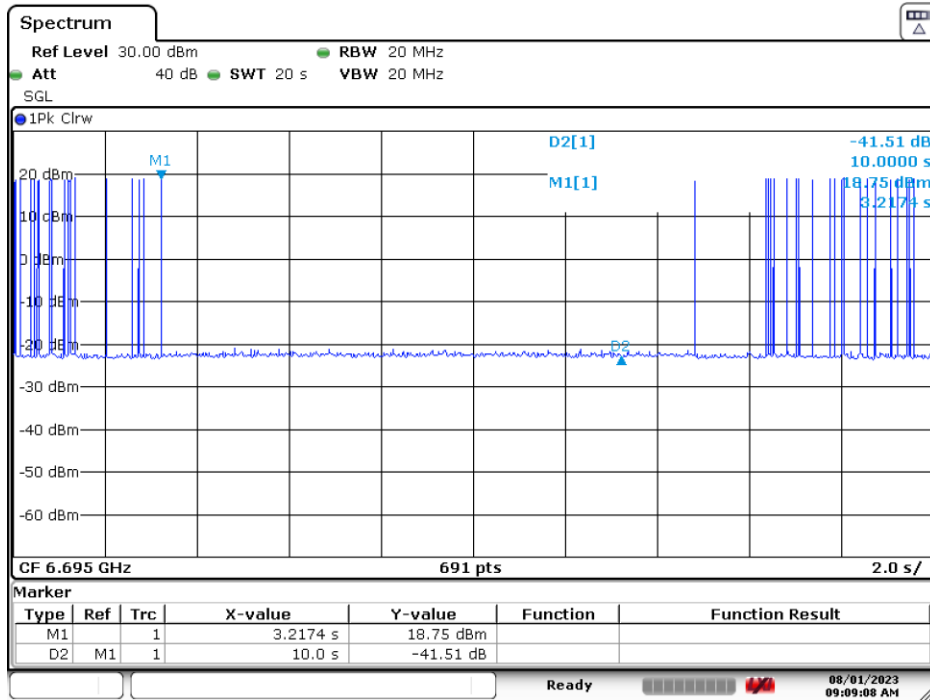

Date: 1.AUG.2023 09:09:07


Plot 7-250. Contention Based Protocol Timing Plot (20MHz (UNII Band 7) – Ch. 149)

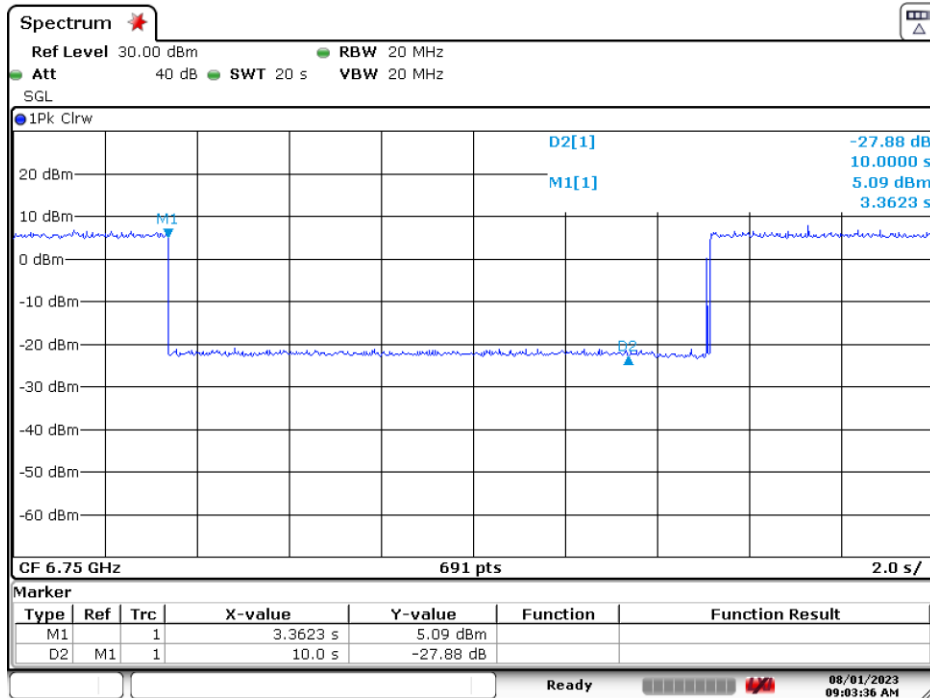

Date: 1.AUG.2023 09:03:36


Plot 7-251. Contention Based Protocol Timing Plot (160MHz (UNII Band 7) – Ch. 175 Low)

FCC ID: A3LSMS711U		MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset		Page 170 of 207

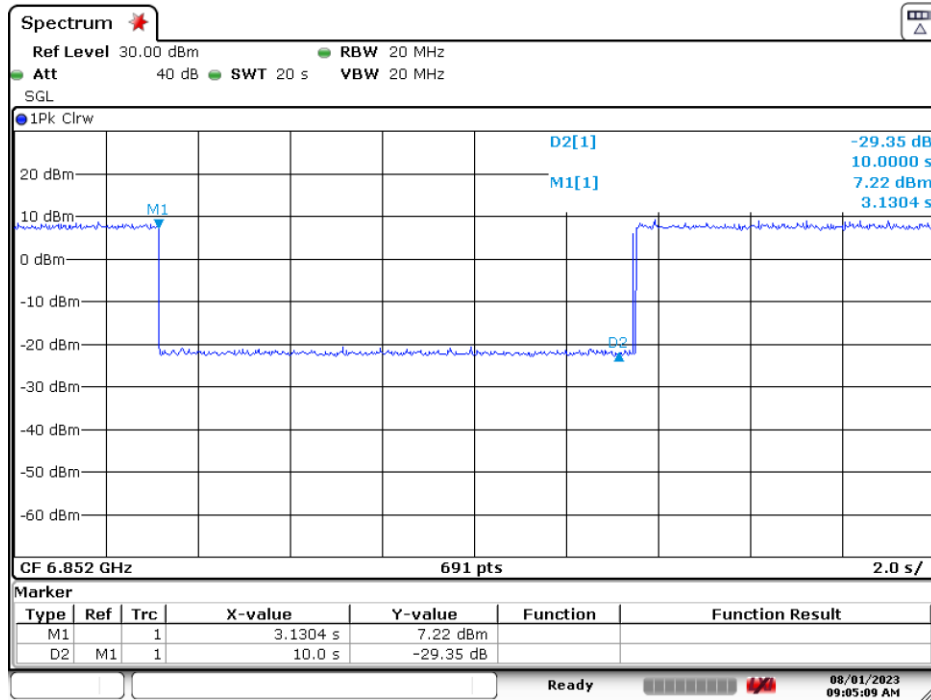

Date: 1.AUG.2023 09:05:09


Plot 7-252. Contention Based Protocol Timing Plot (160MHz (UNII Band 7) – Ch. 175 Mid)

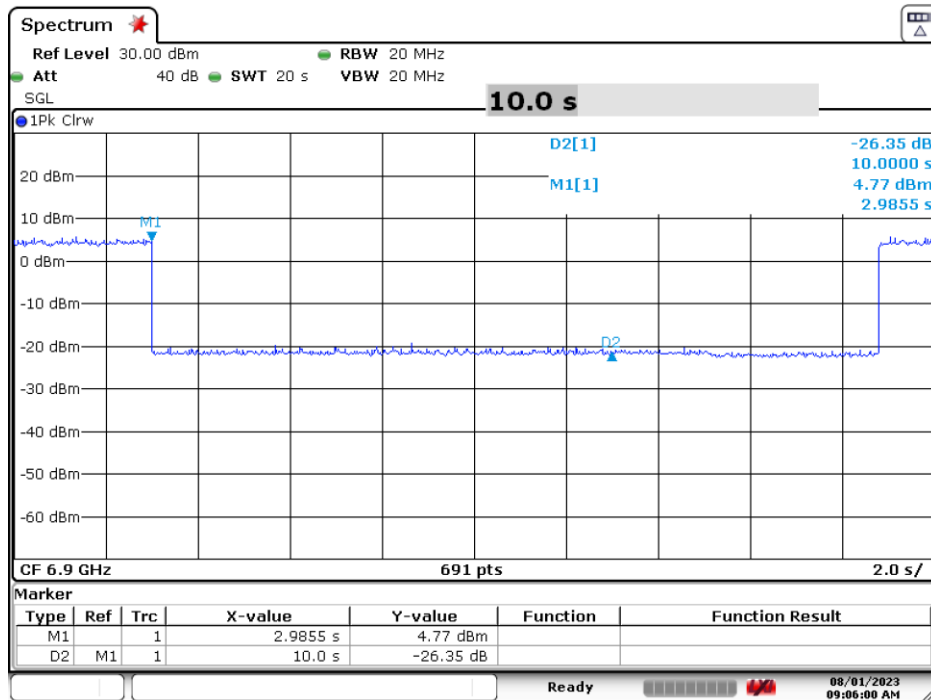

Date: 1.AUG.2023 09:06:00


Plot 7-253. Contention Based Protocol Timing Plot (160MHz (UNII Band 7) – Ch. 175 High)

FCC ID: A3LSMS711U		MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset		Page 171 of 207

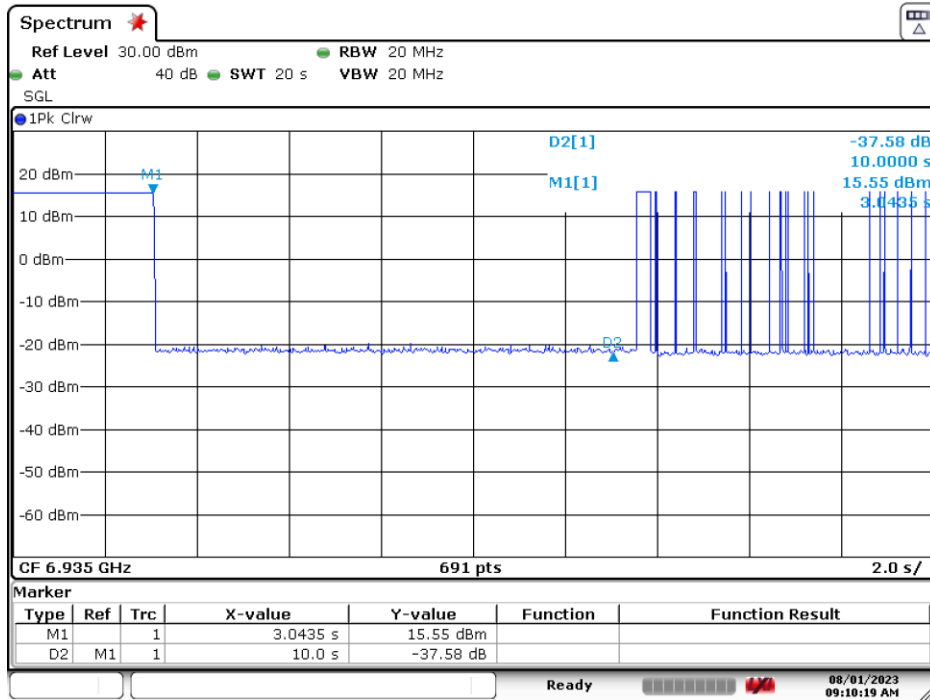

Date: 1.AUG.2023 09:10:20


Plot 7-254. Contention Based Protocol Timing Plot (20MHz (UNII Band 8) – Ch. 197)

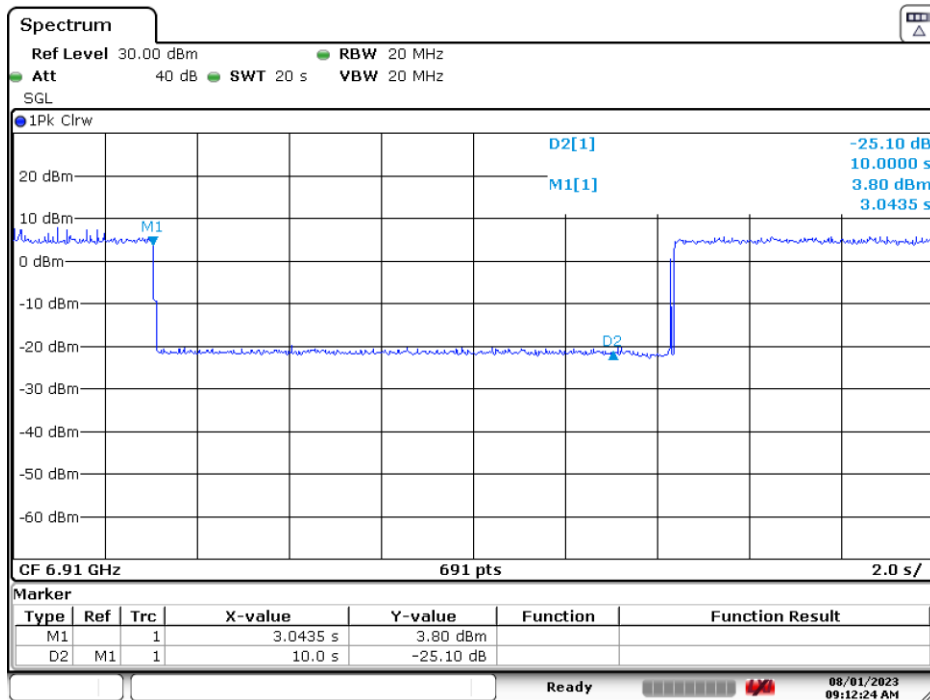

Date: 1.AUG.2023 09:12:25


Plot 7-255. Contention Based Protocol Timing Plot (160MHz (UNII Band 8) – Ch. 207 Low)

FCC ID: A3LSMS711U		MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset		Page 172 of 207

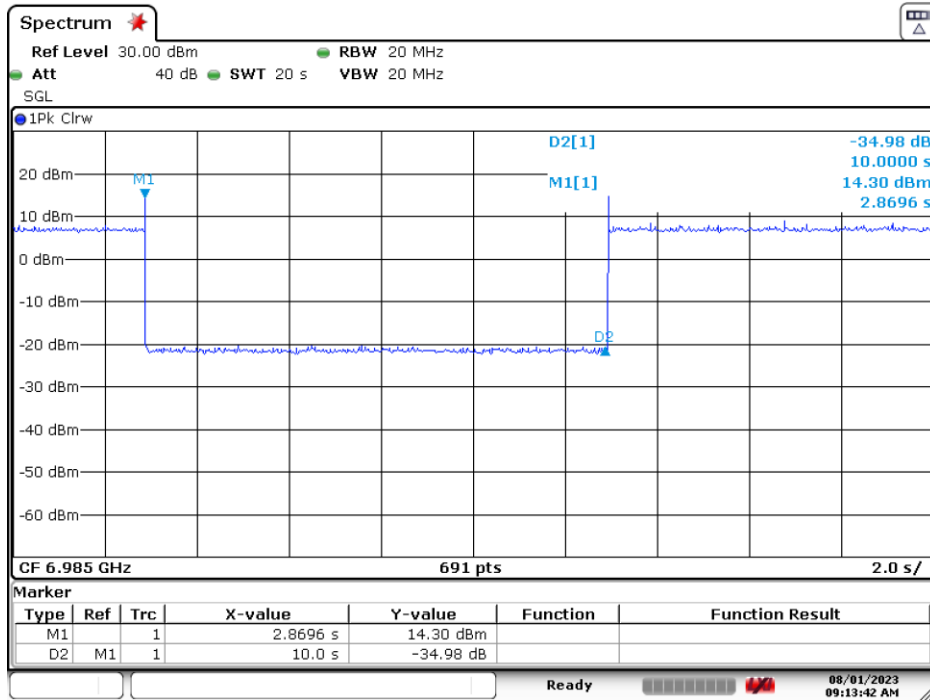

Date: 1.AUG.2023 09:13:43

Plot 7-256. Contention Based Protocol Timing Plot (160MHz (UNII Band 8) – Ch. 207 Mid)

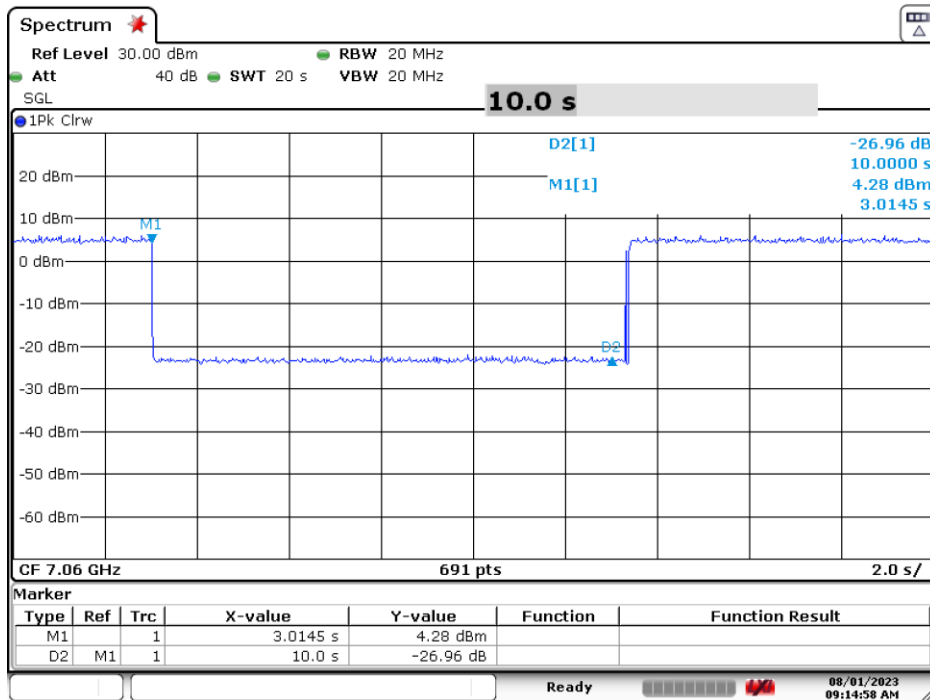

Date: 1.AUG.2023 09:14:59

Plot 7-257. Contention Based Protocol Timing Plot (160MHz (UNII Band 8) – Ch. 207 High)

FCC ID: A3LSMS711U		MEASUREMENT REPORT		Approved by:
Test Report S/N:		Test Dates:		Technical Manager
1M2304260060-20.A3L		5/24-8/1/2023		Page 173 of 207
		EUT Type:		
		Portable Handset		

7.7 Radiated Emission Measurements

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies. All channels, modes (e.g. 802.11ax (20/40/80/160MHz)), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz

Emissions found in a restricted band are subject to the limits of 15.209 as shown in the table below.

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-24. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Sections 12.7.7.2, 12.7.6, 12.7.5

Test Settings – Above 1GHz

Average Field Strength Measurements (Method AD – Average Detection)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span} \backslash \backslash \text{RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces.

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 174 of 207

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize.

Test Settings – Below 1GHz

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

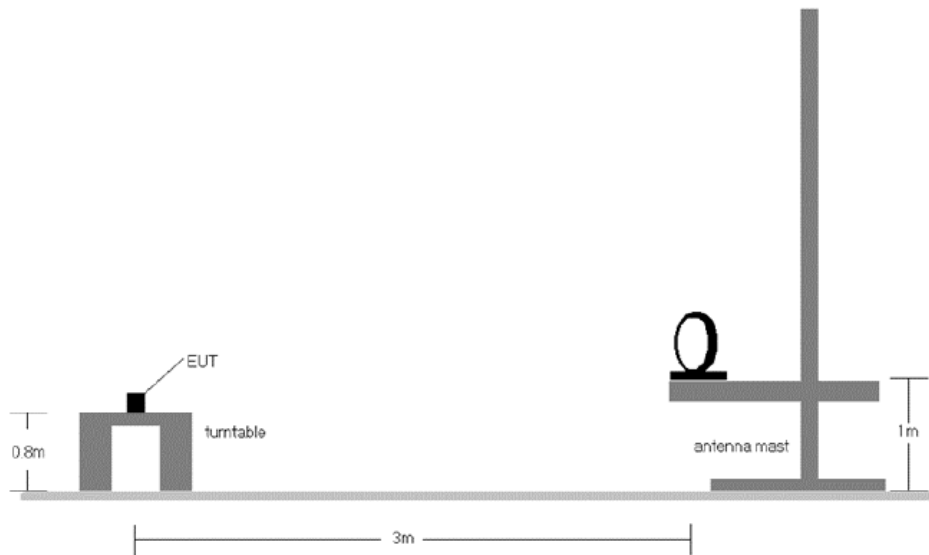


Figure 7-6. Radiated Test Setup < 30MHz

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 175 of 207

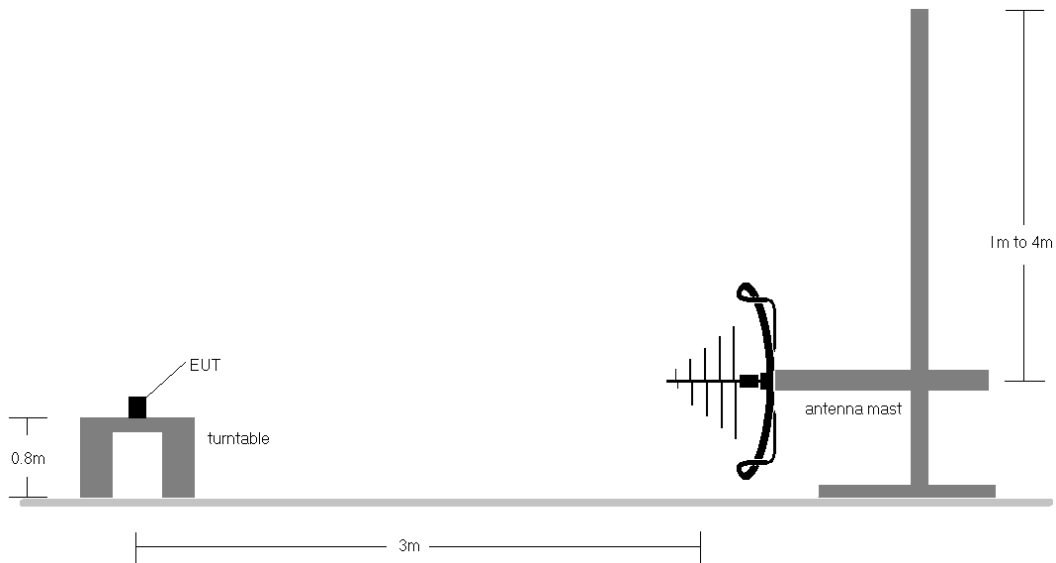


Figure 7-7. Radiated Test Setup < 1GHz

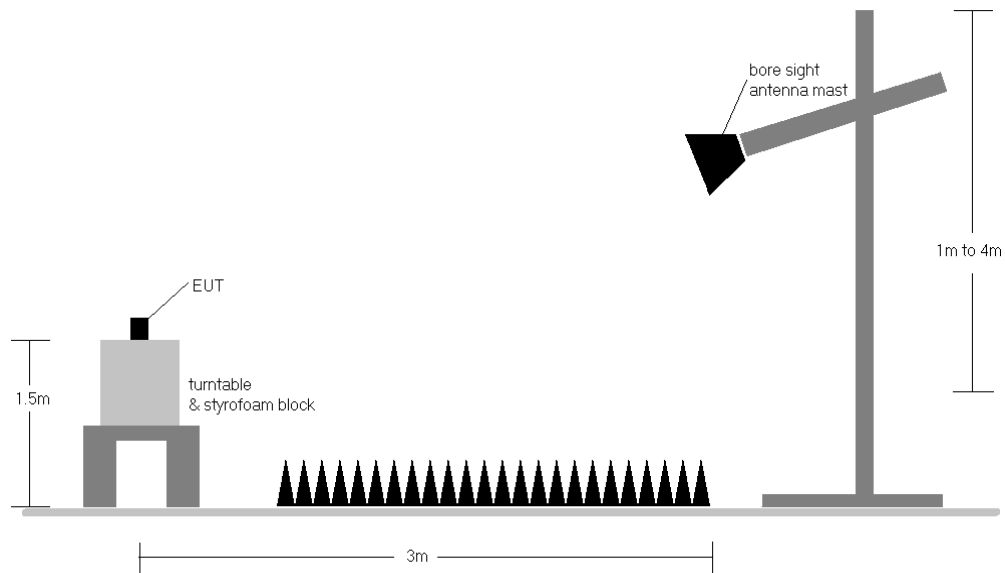


Figure 7-8. Radiated Test Setup > 1GHz

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 176 of 207

Test Notes

1. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in §15.209. All spurious emissions that do not lie in a restricted band are subject to an average limit of -27dBm/MHz. At 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
2. All spurious emissions that do not lie in a restricted band are subject to a peak limit not to exceed 20dB of the average limit [68.2dB μ V/m]. If a peak measurement passes the average limit, it was determined no further investigation is necessary.
3. The antenna is manipulated through typical positions, polarity, and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported, however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1-meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
9. For radiated measurements, emissions were investigated for the fully-loaded RU configuration and for all of the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB]
- Margin [dB] = Field Strength Level [dB μ V/m] – Limit [dB μ V/m]

Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 177 of 207


7.7.1 MIMO Radiated Spurious Emission Measurements (26 Tones)

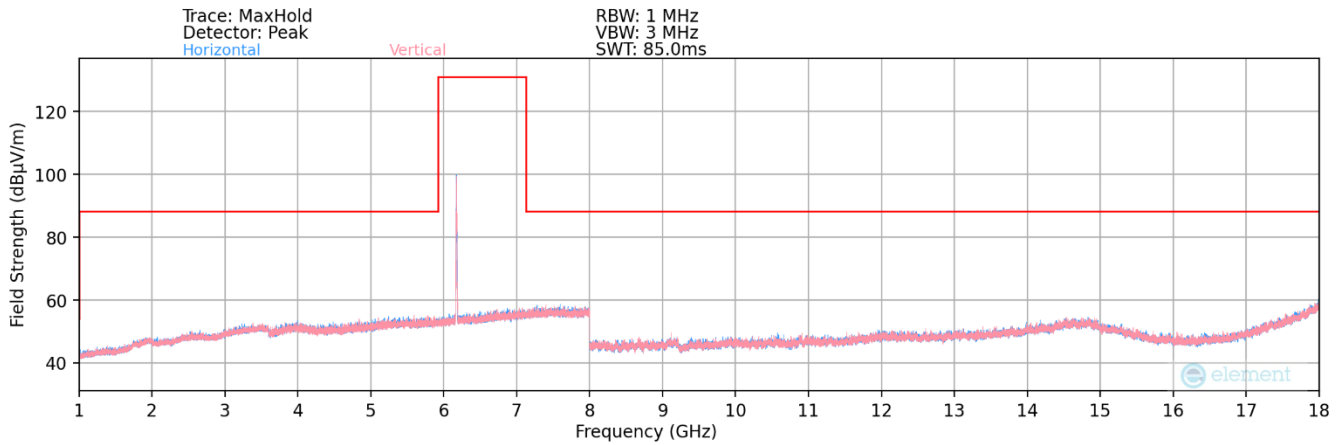

Plot 7-258. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 5 Ch. 45) – LPI

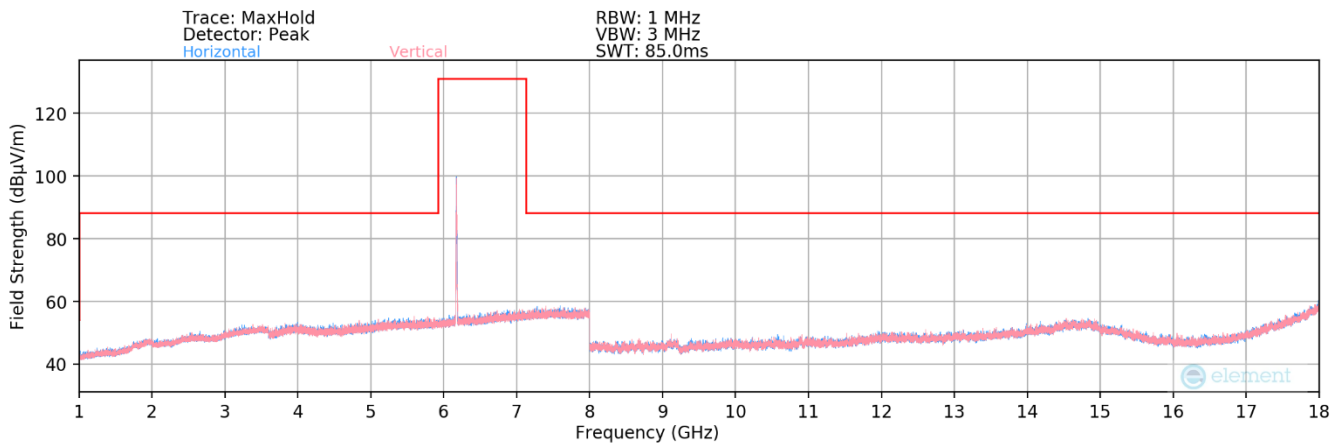


Plot 7-259. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 5 Ch. 45) – SP

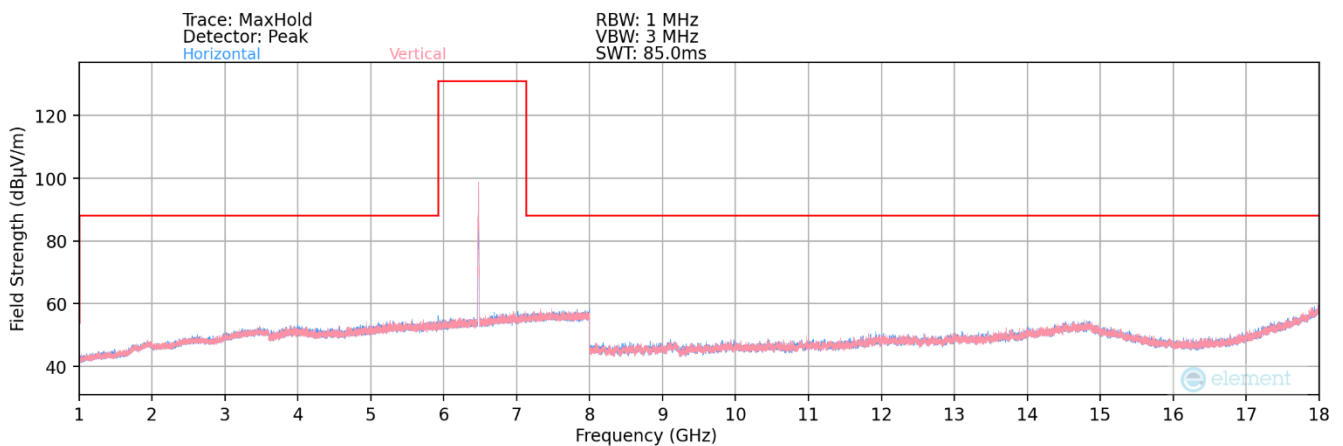


Plot 7-260. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 6 Ch. 105)


FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 178 of 207

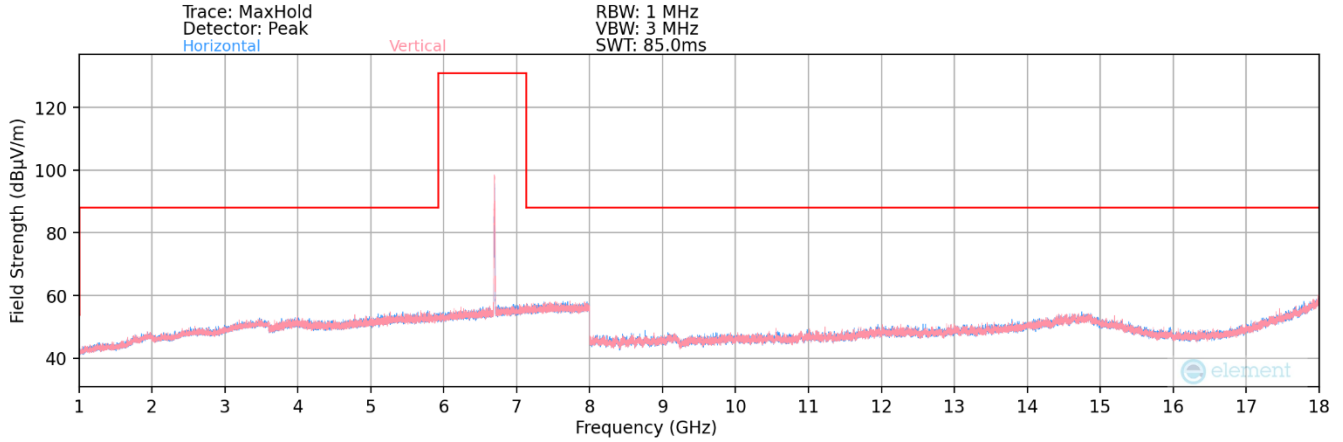

Plot 7-261. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 7 Ch. 149) – LPI

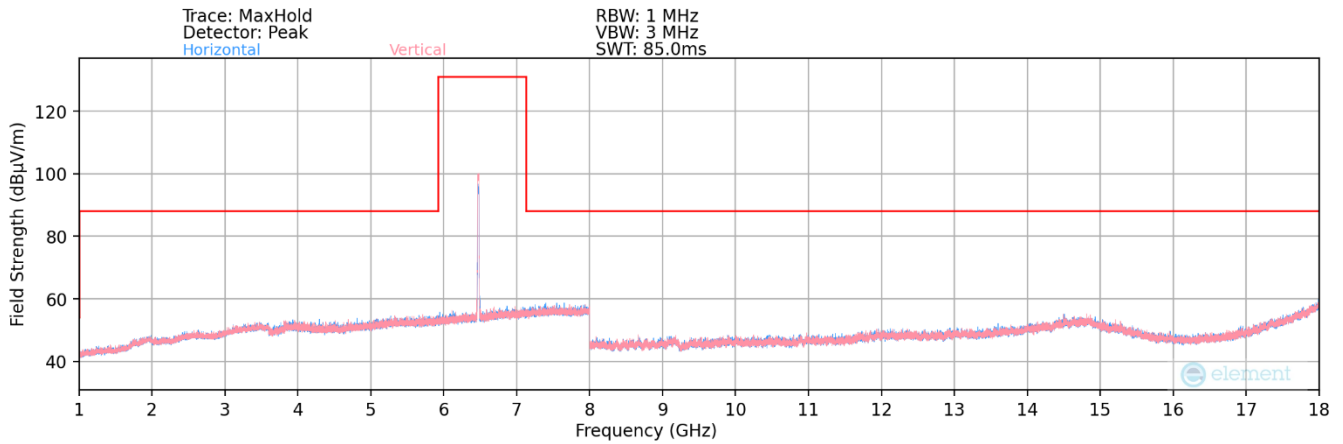


Plot 7-262. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 7 Ch. 149) - SP

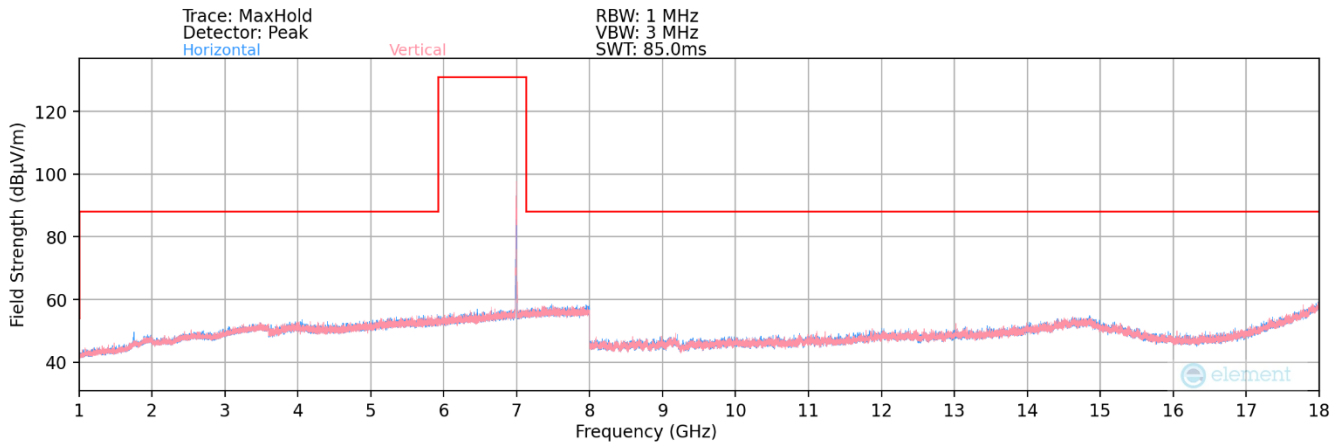


Plot 7-263. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – U Band 8 Ch. 209)


FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 179 of 207

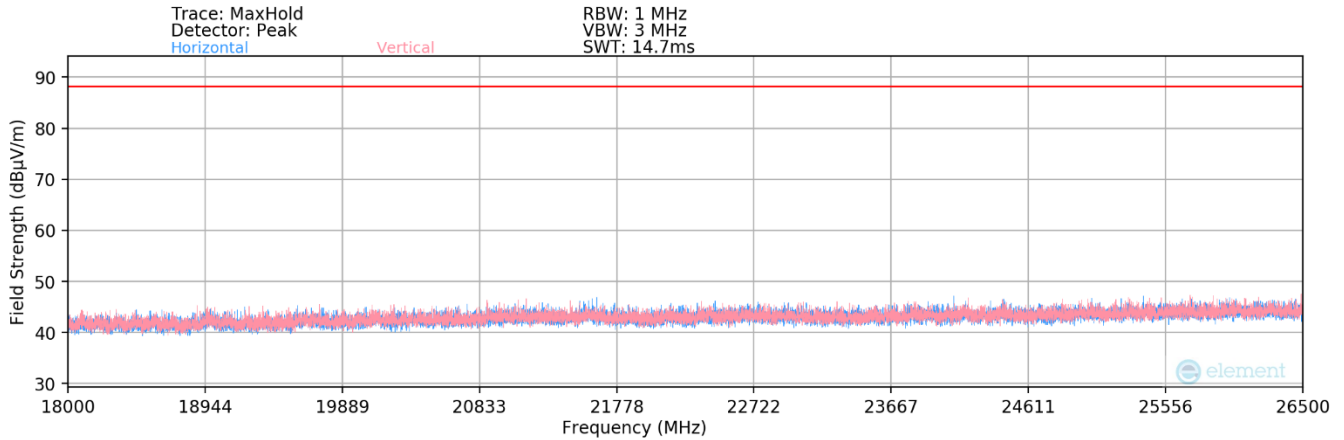

Plot 7-264. Radiated Spurious Plot 18GHz - 26.5GHz (802.11ax) – LPI

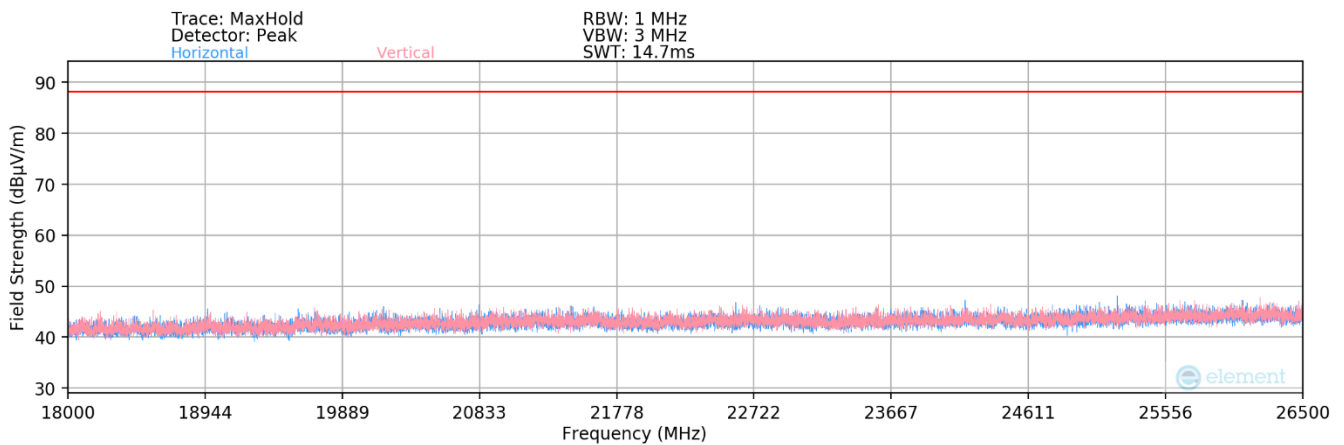


Plot 7-265. Radiated Spurious Plot 18GHz - 26.5GHz (802.11ax) – SP

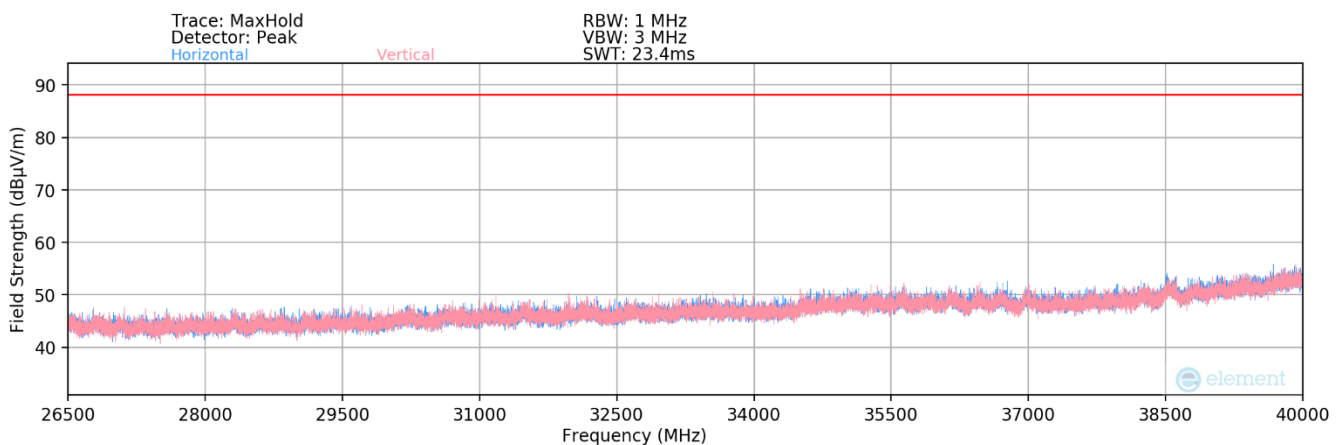

Plot 7-266. Radiated Spurious Plot 26.5GHz - 40GHz (802.11ax) – LPI

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 180 of 207

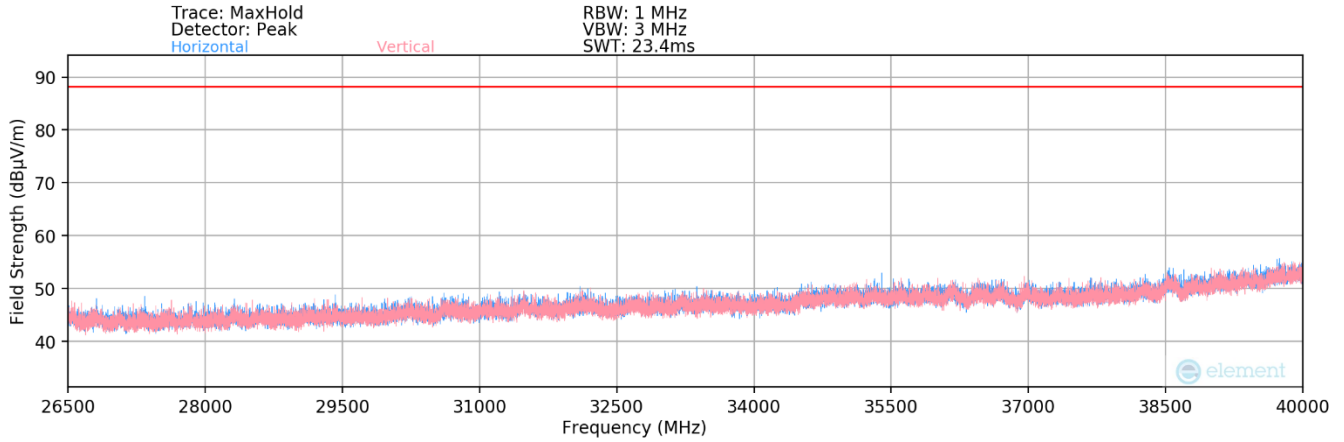

Plot 7-267. Radiated Spurious Plot 26.5GHz - 40GHz (802.11ax) – SP

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 181 of 207



7.7.1.1 MIMO Radiated Spurious Emission Measurements (26 Tones) – UNII Band 5

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5935MHz
 Channel: 2

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11870.00	Average	V	-	-	-78.04	9.32	0.00	38.28	53.98	-15.70
* 11870.00	Peak	V	-	-	-65.94	9.32	0.00	50.38	73.98	-23.60
* 17805.00	Average	V	-	-	-76.92	15.72	0.00	45.80	53.98	-8.18
* 17805.00	Peak	V	-	-	-65.17	15.72	0.00	57.55	73.98	-16.43
* 23740.00	Average	V	150	340	-62.86	3.96	-9.54	38.55	53.98	-15.43
* 23740.00	Peak	V	150	340	-56.36	3.96	-9.54	45.06	73.98	-28.92
* 29675.00	Peak	V	-	-	-57.84	5.90	-9.54	45.52	68.20	-22.68

Table 7-25. Radiated Measurements MIMO (26 Tones) – LPI

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11870.00	Average	V	191	50	-76.27	9.32	0.00	40.05	53.98	-13.93
* 11870.00	Peak	V	191	50	-62.29	9.32	0.00	54.03	73.98	-19.95
* 17805.00	Average	V	-	-	-76.94	15.72	0.00	45.78	53.98	-8.20
* 17805.00	Peak	V	-	-	-65.36	15.72	0.00	57.36	73.98	-16.62
* 23740.00	Average	V	-	-	-67.33	3.96	-9.54	34.09	53.98	-19.89
* 23740.00	Peak	V	-	-	-57.21	3.96	-9.54	44.21	73.98	-29.77
* 29675.00	Peak	V	-	-	-56.73	5.90	-9.54	46.64	68.20	-21.56

Table 7-26. Radiated Measurements MIMO (26 Tones) – SP

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 182 of 207

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6175MHz
 Channel: 45

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 12350.00	Average	V	-	-	-78.04	9.61	0.00	38.57	53.98	-15.41
* 12350.00	Peak	V	-	-	-66.21	9.67	0.00	50.46	73.98	-23.52
* 18525.00	Average	V	-	-	-65.88	1.55	-9.54	33.13	53.98	-20.85
* 18525.00	Peak	V	-	-	-56.03	1.55	-9.54	42.98	73.98	-31.00
24700.00	Peak	V	-	-	-55.84	4.20	-9.54	45.82	68.20	-22.38
30875.00	Peak	V	-	-	-57.11	6.77	-9.54	47.11	68.20	-21.09

Table 7-27. Radiated Measurements MIMO (26 Tones) – LPI

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 12350.00	Average	V	106	55	-76.44	9.61	0.00	40.17	53.98	-13.81
* 12350.00	Peak	V	106	55	-63.59	9.67	0.00	53.08	73.98	-20.90
* 18525.00	Average	V	-	-	-67.00	1.55	-9.54	32.01	53.98	-21.97
* 18525.00	Peak	V	-	-	-55.15	1.55	-9.54	43.86	73.98	-30.12
24700.00	Peak	V	-	-	-56.54	4.20	-9.54	45.12	68.20	-23.08
30875.00	Peak	V	-	-	-56.61	6.77	-9.54	47.61	68.20	-20.59

Table 7-28. Radiated Measurements MIMO (26 Tones) – SP

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 183 of 207

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6415MHz
 Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12830.00	Peak	V	-	-	-66.05	9.64	0.00	50.59	68.20	-17.61
* 19245.00	Average	V	-	-	-66.46	2.35	-9.54	33.35	53.98	-20.63
* 19245.00	Peak	V	-	-	-56.15	2.35	-9.54	43.66	73.98	-30.32
25660.00	Peak	V	150	344	-55.63	4.41	-9.54	46.23	68.20	-21.97
32075.00	Peak	V	-	-	-57.01	7.43	-9.54	47.89	68.20	-20.31

Table 7-29. Radiated Measurements MIMO (26 Tones) – LPI

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12830.00	Peak	V	-	-	-66.47	9.64	0.00	50.17	68.20	-18.03
* 19245.00	Average	V	-	-	-66.12	2.35	-9.54	33.69	53.98	-20.29
* 19245.00	Peak	V	-	-	-56.21	2.35	-9.54	43.60	73.98	-30.38
25660.00	Peak	V	-	-	-56.73	4.41	-9.54	45.13	68.20	-23.07
32075.00	Peak	V	-	-	-56.70	7.43	-9.54	48.19	68.20	-20.01

Table 7-30. Radiated Measurements MIMO (26 Tones) – SP

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 184 of 207



7.7.1.2 MIMO Radiated Spurious Emission Measurements (26 Tones) – UNII Band 6

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6435MHz
 Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
12870.00	Peak	V	-	-	-66.49	10.05	0.00	50.56	68.20	-17.64
* 19305.00	Average	V	-	-	-66.39	2.13	-9.54	33.21	53.98	-20.77
* 19305.00	Peak	V	-	-	-55.84	2.13	-9.54	43.75	73.98	-30.23
25740.00	Peak	V	150	310	-56.52	4.51	-9.54	45.46	68.20	-22.74
32175.00	Peak	V	-	-	-57.36	7.53	-9.54	47.63	68.20	-20.57

Table 7-31. Radiated Measurements MIMO (26 Tones)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6475MHz
 Channel: 105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
12950.00	Peak	V	-	-	-65.93	10.13	0.00	51.20	68.20	-17.00
* 19425.00	Average	V	-	-	-63.67	2.22	-9.54	36.01	53.98	-17.97
* 19425.00	Peak	V	-	-	-54.90	2.22	-9.54	44.78	73.98	-29.20
25900.00	Peak	V	150	313	-56.08	4.57	-9.54	45.95	68.20	-22.25
32375.00	Peak	V	-	-	-57.63	7.29	-9.54	47.13	68.20	-21.07

Table 7-32. Radiated Measurements MIMO (26 Tones)

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 185 of 207



Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6515MHz
 Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13030.00	Peak	V	-	-	-65.87	10.12	0.00	51.25	68.20	-16.95
* 19545.00	Average	V	-	-	-66.19	2.37	-9.54	33.64	53.98	-20.34
* 19545.00	Peak	V	-	-	-56.44	2.37	-9.54	43.39	73.98	-30.59
26060.00	Peak	V	150	320	-55.72	4.80	-9.54	46.54	68.20	-21.66
32575.00	Peak	V	-	-	-56.95	6.85	-9.54	47.36	68.20	-20.84

Table 7-33. Radiated Measurements MIMO (26 Tones)

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 186 of 207

7.7.1.3 MIMO Radiated Spurious Emission Measurements (26 Tones) – UNII Band 7

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6535MHz
 Channel: 117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13070.00	Peak	V	-	-	-66.27	10.15	0.00	50.88	68.20	-17.32
* 19605.00	Average	V	-	-	-63.34	2.64	-9.54	36.77	53.98	-17.21
* 19605.00	Peak	V	-	-	-55.57	2.64	-9.54	44.54	73.98	-29.44
26140.00	Peak	V	150	316	-56.59	4.56	-9.54	45.43	68.20	-22.77
32675.00	Peak	V	-	-	-55.87	7.03	-9.54	48.62	68.20	-19.58

Table 7-34. Radiated Measurements MIMO (26 Tones) – LPI

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13070.00	Peak	V	-	-	-66.48	10.15	0.00	50.67	68.20	-17.53
* 19605.00	Average	V	-	-	-65.94	2.64	-9.54	34.16	53.98	-19.82
* 19605.00	Peak	V	-	-	-55.58	2.64	-9.54	44.53	73.98	-29.45
26140.00	Peak	V	-	-	-54.87	4.56	-9.54	47.15	68.20	-21.05
32675.00	Peak	V	-	-	-57.22	7.03	-9.54	47.27	68.20	-20.93

Table 7-35. Radiated Measurements MIMO (26 Tones) – SP

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 187 of 207

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6695MHz
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 13390.00	Average	V	-	-	-78.21	10.35	0.00	39.14	53.98	-14.84
* 13390.00	Peak	V	-	-	-65.85	10.35	0.00	51.50	73.98	-22.48
* 20085.00	Average	V	-	-	-66.13	3.01	-9.54	34.34	53.98	-19.64
* 20085.00	Peak	V	-	-	-54.69	3.01	-9.54	45.78	73.98	-28.20
26780.00	Peak	V	150	57	-55.42	4.57	-9.54	46.61	68.20	-21.59
33475.00	Peak	V	-	-	-56.09	7.57	-9.54	48.94	68.20	-19.26

Table 7-36. Radiated Measurements MIMO (26 Tones) - LPI

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 13390.00	Average	V	250	44	-76.27	10.35	0.00	41.08	53.98	-12.90
* 13390.00	Peak	V	250	44	-63.29	10.35	0.00	54.06	73.98	-19.92
* 20085.00	Average	V	-	-	-64.91	3.01	-9.54	35.56	53.98	-18.42
* 20085.00	Peak	V	-	-	-55.66	3.01	-9.54	44.81	73.98	-29.17
26780.00	Peak	V	-	-	-56.64	4.57	-9.54	45.40	68.20	-22.80
33475.00	Peak	V	-	-	-57.10	7.57	-9.54	47.93	68.20	-20.27

Table 7-37. Radiated Measurements MIMO (26 Tones) – SP

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 188 of 207

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6875MHz
 Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
13750.00	Peak	V	-	-	-66.17	11.07	0.00	51.90	68.20	-16.30
* 20625.00	Average	V	-	-	-66.88	3.42	-9.54	34.01	53.98	-19.97
* 20625.00	Peak	V	-	-	-56.66	3.42	-9.54	44.22	73.98	-29.76
27500.00	Average	V	150	50	-55.54	4.54	-9.54	46.46	68.20	-21.74
34375.00	Peak	V	-	-	-56.41	8.08	-9.54	49.13	68.20	-19.07

Table 7-38. Radiated Measurements MIMO (26 Tones) – LPI

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
13750.00	Peak	V	-	-	-66.17	11.07	0.00	51.90	68.20	-16.30
* 20625.00	Average	V	-	-	-66.88	3.42	-9.54	34.01	53.98	-19.97
* 20625.00	Peak	V	-	-	-56.66	3.42	-9.54	44.22	73.98	-29.76
27500.00	Average	V	150	50	-55.54	4.54	-9.54	46.46	68.20	-21.74
34375.00	Peak	V	-	-	-56.41	8.08	-9.54	49.13	68.20	-19.07

Table 7-39. Radiated Measurements MIMO (26 Tones) – SP

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 189 of 207



7.7.1.4 MIMO Radiated Spurious Emission Measurements (26 Tones) – UNII Band 8

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6895MHz
 Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
13790.00	Peak	V	-	-	-65.90	11.00	0.00	52.10	68.20	-16.10
* 20685.00	Average	V	-	-	-66.88	3.67	-9.54	34.25	53.98	-19.73
* 20685.00	Peak	V	-	-	-56.84	3.67	-9.54	44.29	73.98	-29.69
27580.00	Peak	V	150	57	-56.59	4.68	-9.54	45.55	68.20	-22.65
34475.00	Peak	V	-	-	-55.90	7.83	-9.54	49.39	68.20	-18.81

Table 7-40. Radiated Measurements MIMO (26 Tones)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6995MHz
 Channel: 209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
13990.00	Peak	V	-	-	-67.43	11.26	0.00	50.83	68.20	-17.37
* 20985.00	Average	V	-	-	-66.94	3.59	-9.54	34.11	53.98	-19.87
* 20985.00	Peak	V	-	-	-57.20	3.59	-9.54	43.85	73.98	-30.13
27980.00	Peak	V	150	51	-56.44	5.05	-9.54	46.07	68.20	-22.13
34975.00	Peak	V	-	-	-56.55	8.24	-9.54	49.15	68.20	-19.05

Table 7-41. Radiated Measurements MIMO (26 Tones)

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 190 of 207


Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 4
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 7115MHz
 Channel: 233

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
14230.00	Peak	V	-	-	-69.18	12.13	0.00	49.95	68.20	-18.25
* 21345.00	Average	V	-	-	-66.73	4.08	-9.54	34.81	53.98	-19.17
* 21345.00	Peak	V	-	-	-56.56	4.08	-9.54	44.98	73.98	-29.00
28460.00	Peak	V	-	-	-56.98	5.14	-9.54	45.62	68.20	-22.58
35575.00	Peak	V	-	-	-55.24	8.16	-9.54	50.39	68.20	-17.81


Table 7-42. Radiated Measurements MIMO (26 Tones)

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 191 of 207


7.7.2 MIMO Radiated Spurious Emission Measurements (242 Tones)

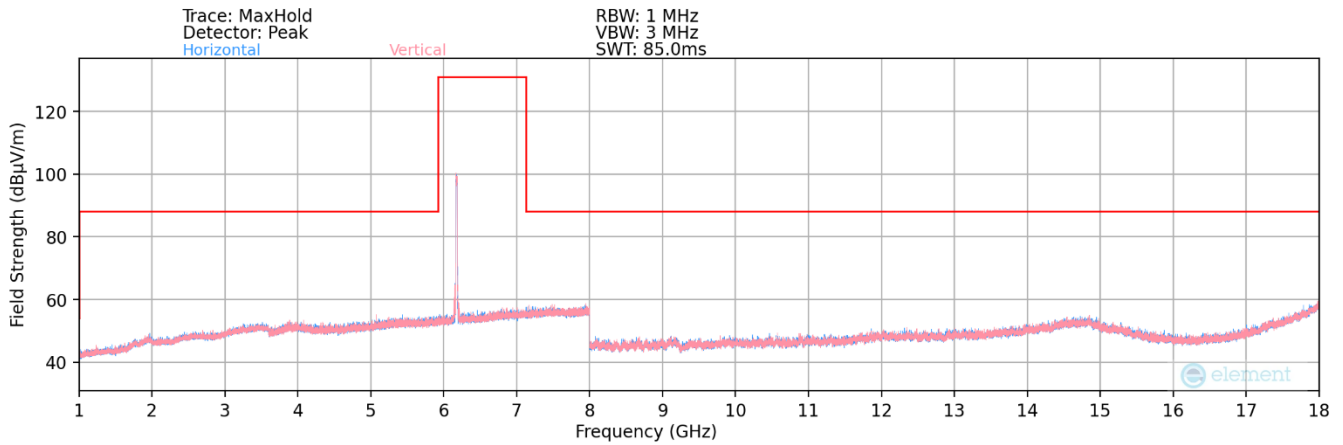

Plot 7-268. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 5 Ch. 45) – LPI/SP

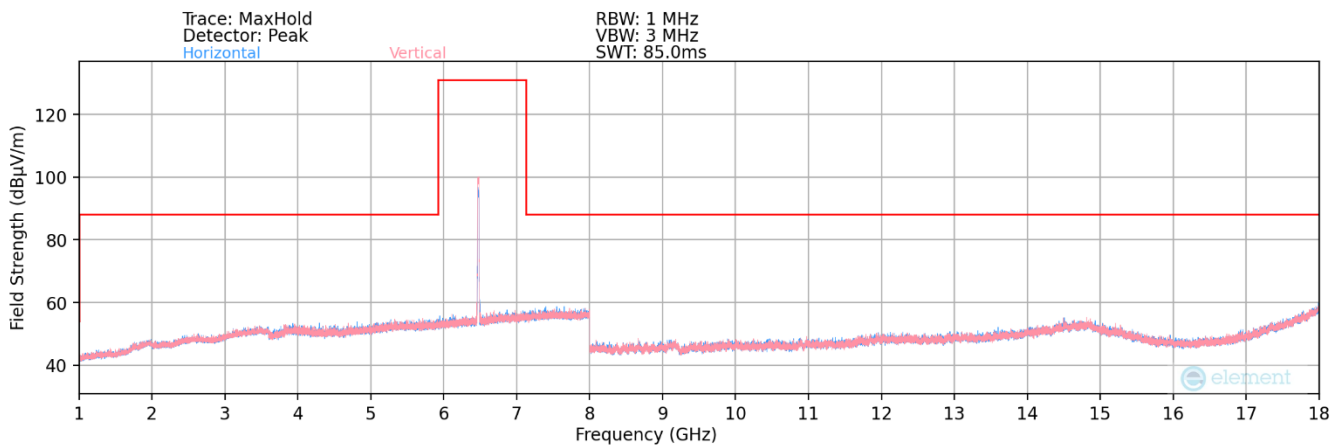


Plot 7-269. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 6 Ch. 105)

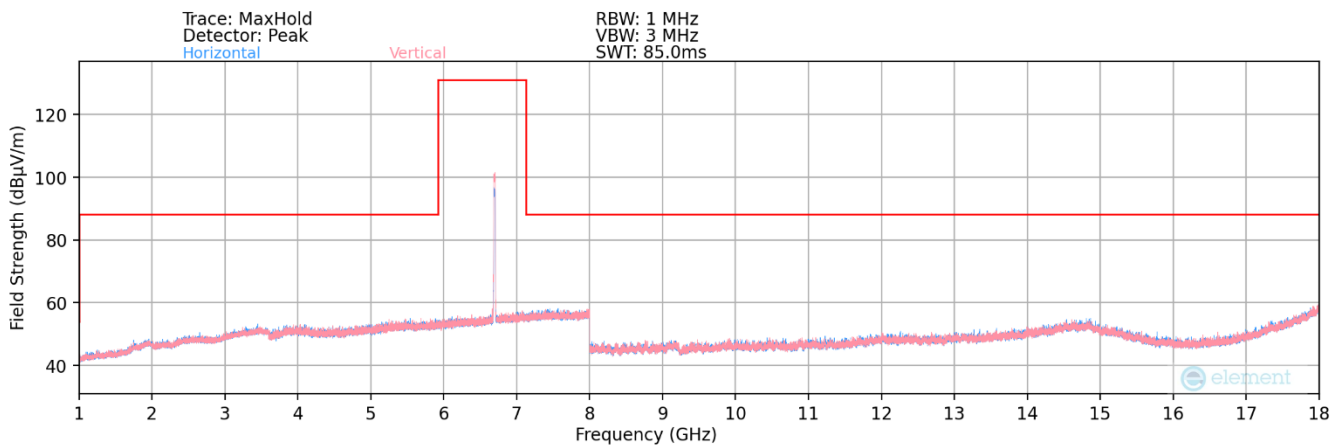


Plot 7-270. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 7 Ch. 149) – LPI/SP


FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 192 of 207

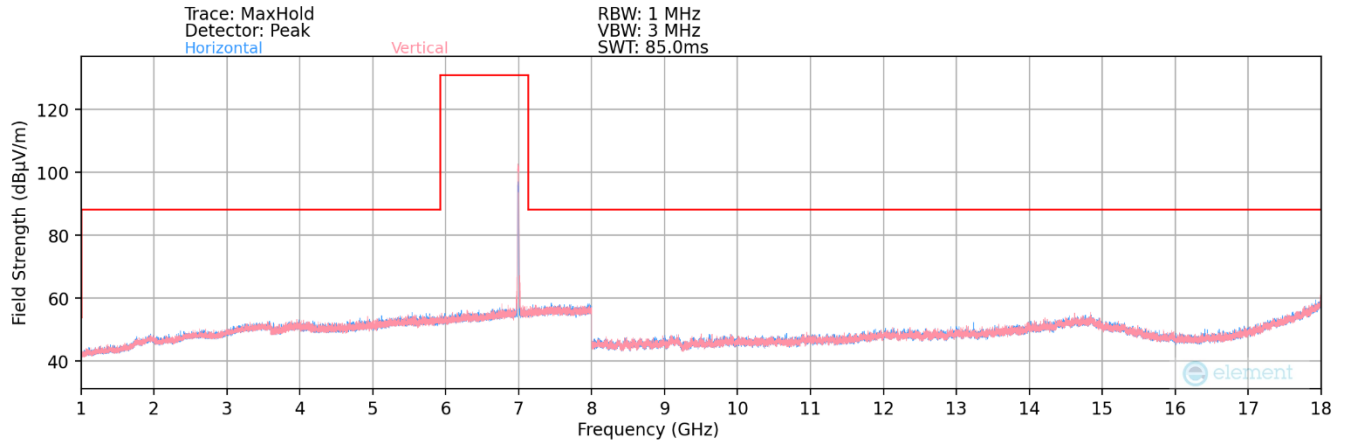

Plot 7-271. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – U Band 8 Ch. 209)

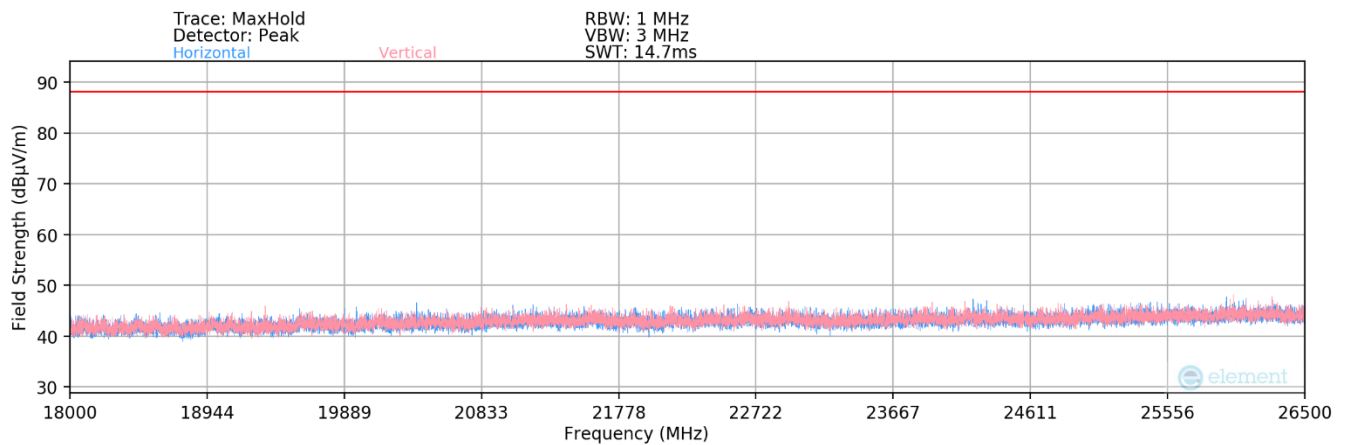

Plot 7-272. Radiated Spurious Plot 18GHz - 26.5GHz (802.11ax) – LPI/SP

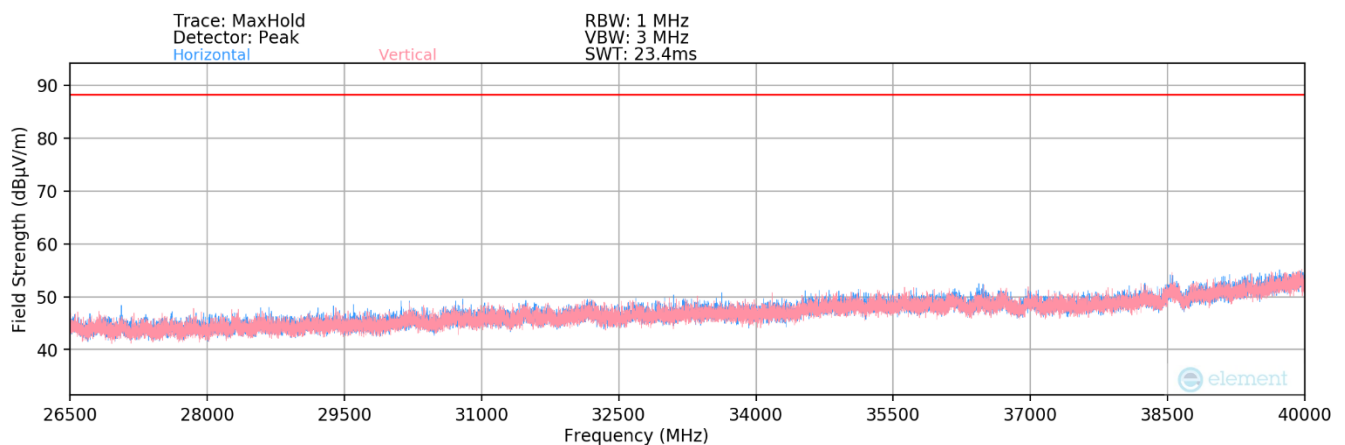

Plot 7-273. Radiated Spurious Plot 26.5GHz - 40GHz (802.11ax) – LPI/SP

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 193 of 207



7.7.2.1 MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII Band 5

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5935MHz
 Channel: 2

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11870.00	Average	V	-	-	-79.13	9.32	0.00	37.19	53.98	-16.79
* 11870.00	Peak	V	-	-	-66.81	9.32	0.00	49.51	73.98	-24.47
* 17805.00	Average	V	-	-	-77.54	15.72	0.00	45.18	53.98	-8.80
* 17805.00	Peak	V	-	-	-65.00	15.72	0.00	57.72	73.98	-16.26
* 23740.00	Average	V	-	-	-66.55	3.96	-9.54	34.87	53.98	-19.11
* 23740.00	Peak	V	-	-	-52.14	3.96	-9.54	49.28	73.98	-24.70
* 29675.00	Peak	V	-	-	-55.93	5.90	-9.54	47.43	68.20	-20.77

Table 7-43. Radiated Measurements MIMO (242 Tones) – LPI/SP

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6175MHz
 Channel: 45

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 12350.00	Average	V	-	-	-81.37	9.61	0.00	35.24	53.98	-18.74
* 12350.00	Peak	V	-	-	-69.07	9.67	0.00	47.60	73.98	-26.38
* 18525.00	Average	V	-	-	-65.78	1.55	-9.54	33.23	53.98	-20.75
* 18525.00	Peak	V	-	-	-55.78	1.55	-9.54	43.23	73.98	-30.75
24700.00	Peak	V	-	-	-55.13	4.20	-9.54	46.53	68.20	-21.67
30875.00	Peak	V	-	-	-55.81	6.77	-9.54	48.42	68.20	-19.78

Table 7-44. Radiated Measurements MIMO (242 Tones) – LPI/SP

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 194 of 207

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6415MHz
 Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12830.00	Peak	V	-	-	-66.39	9.64	0.00	50.25	68.20	-17.95
* 19245.00	Average	V	-	-	-66.06	2.35	-9.54	33.75	53.98	-20.23
* 19245.00	Peak	V	-	-	-55.23	2.35	-9.54	44.58	73.98	-29.40
25660.00	Peak	V	-	-	-56.41	4.41	-9.54	45.45	68.20	-22.75
32075.00	Peak	V	-	-	-57.07	7.43	-9.54	47.82	68.20	-20.38

Table 7-45. Radiated Measurements MIMO (242 Tones) – LPI/SP

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 195 of 207

7.7.2.2 MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII Band 6

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6435MHz
 Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
12870.00	Peak	V	-	-	-66.90	10.05	0.00	50.15	68.20	-18.05
* 19305.00	Average	V	-	-	-66.41	2.13	-9.54	33.18	53.98	-20.80
* 19305.00	Peak	V	-	-	-56.23	2.13	-9.54	43.37	73.98	-30.61
25740.00	Peak	V	150	0	-56.16	4.51	-9.54	45.81	68.20	-22.39
32175.00	Peak	V	-	-	-56.93	7.53	-9.54	48.06	68.20	-20.14

Table 7-46. Radiated Measurements MIMO (242 Tones)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6475MHz
 Channel: 105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
12950.00	Peak	V	-	-	-67.95	10.13	0.00	49.18	68.20	-19.02
* 19425.00	Average	V	-	-	-66.22	2.22	-9.54	33.46	53.98	-20.52
* 19425.00	Peak	V	-	-	-56.41	2.22	-9.54	43.27	73.98	-30.71
25900.00	Peak	V	15	317	-56.65	4.57	-9.54	45.39	68.20	-22.81
32375.00	Peak	V	-	-	-56.36	7.29	-9.54	48.39	68.20	-19.81

Table 7-47. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 196 of 207

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6515MHz
 Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13030.00	Peak	V	-	-	-68.18	10.12	0.00	48.94	68.20	-19.26
* 19545.00	Average	V	-	-	-66.30	2.37	-9.54	33.54	53.98	-20.44
* 19545.00	Peak	V	-	-	-55.53	2.37	-9.54	44.31	73.98	-29.67
26060.00	Peak	V	150	1	-57.09	4.80	-9.54	45.17	68.20	-23.03
32575.00	Peak	V	-	-	-56.40	6.85	-9.54	47.91	68.20	-20.29

Table 7-48. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 197 of 207



7.7.2.3 MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII Band 7

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6535MHz
 Channel: 117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
13070.00	Peak	V	-	-	-68.68	10.15	0.00	48.47	68.20	-19.73
* 19605.00	Average	V	-	-	-66.17	2.64	-9.54	33.93	53.98	-20.05
* 19605.00	Peak	V	-	-	-56.03	2.64	-9.54	44.07	73.98	-29.91
26140.00	Peak	V	150	354	-56.71	4.56	-9.54	45.31	68.20	-22.89
32675.00	Peak	V	-	-	-57.26	7.03	-9.54	47.24	68.20	-20.96

Table 7-49. Radiated Measurements MIMO (242 Tones) – LPI/SP

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6695MHz
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 13390.00	Average	V	-	-	-81.24	10.35	0.00	36.11	53.98	-17.87
* 13390.00	Peak	V	-	-	-69.21	10.35	0.00	48.14	73.98	-25.84
* 20085.00	Average	V	-	-	-66.23	3.01	-9.54	34.24	53.98	-19.74
* 20085.00	Peak	V	-	-	-54.83	3.01	-9.54	45.64	73.98	-28.34
26780.00	Peak	V	-	-	-57.15	4.57	-9.54	44.88	68.20	-23.32
33475.00	Peak	V	-	-	-57.55	7.57	-9.54	47.47	68.20	-20.73

Table 7-50. Radiated Measurements MIMO (242 Tones) – LPI/SP

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 198 of 207

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6875MHz
 Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13750.00	Peak	V	-	-	-65.79	11.07	0.00	52.28	68.20	-15.92
* 20625.00	Average	V	-	-	-67.05	3.42	-9.54	33.84	53.98	-20.14
* 20625.00	Peak	V	-	-	-56.19	3.42	-9.54	44.70	73.98	-29.28
27500.00	Peak	V	-	-	-56.45	4.54	-9.54	45.55	68.20	-22.65
34375.00	Peak	V	-	-	-57.41	8.08	-9.54	48.13	68.20	-20.07

Table 7-51. Radiated Measurements MIMO (242 Tones) – LPI/SP

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 199 of 207

7.7.2.4 MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII Band 8

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6895MHz
 Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13790.00	Peak	V	-	-	-65.66	11.00	0.00	52.34	68.20	-15.86
* 20685.00	Average	V	-	-	-67.09	3.67	-9.54	34.04	53.98	-19.94
* 20685.00	Peak	V	-	-	-56.24	3.67	-9.54	44.88	73.98	-29.10
27580.00	Peak	V	-	-	-55.98	4.68	-9.54	46.16	68.20	-22.04
34475.00	Peak	V	-	-	-56.84	7.83	-9.54	48.45	68.20	-19.75

Table 7-52. Radiated Measurements MIMO (242 Tones)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6995MHz
 Channel: 209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13990.00	Peak	V	-	-	-67.47	11.26	0.00	50.79	68.20	-17.41
* 20985.00	Average	V	-	-	-67.44	3.59	-9.54	33.61	53.98	-20.37
* 20985.00	Peak	V	-	-	-56.32	3.59	-9.54	44.73	73.98	-29.25
27980.00	Peak	V	-	-	-56.86	5.05	-9.54	45.65	68.20	-22.55
34975.00	Peak	V	-	-	-57.58	8.24	-9.54	48.12	68.20	-20.08

Table 7-53. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 200 of 207

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 7115MHz
 Channel: 233


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
14230.00	Peak	V	-	-	-68.82	12.13	0.00	50.31	68.20	-17.89
* 21345.00	Average	V	-	-	-66.86	4.08	-9.54	34.67	53.98	-19.31
* 21345.00	Peak	V	-	-	-56.72	4.08	-9.54	44.82	73.98	-29.16
28460.00	Peak	V	-	-	-57.20	5.14	-9.54	45.40	68.20	-22.80
35575.00	Peak	V	-	-	-55.71	8.16	-9.54	49.91	68.20	-18.29

Table 7-54. Radiated Measurements MIMO (242 Tones)


FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 201 of 207

7.7.3 MIMO Radiated Band Edge Measurements (20MHz BW – Partial Tone – 106T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index	53
Distance of Measurements:	3 Meters
Operating Frequency:	5935MHz
Channel:	2

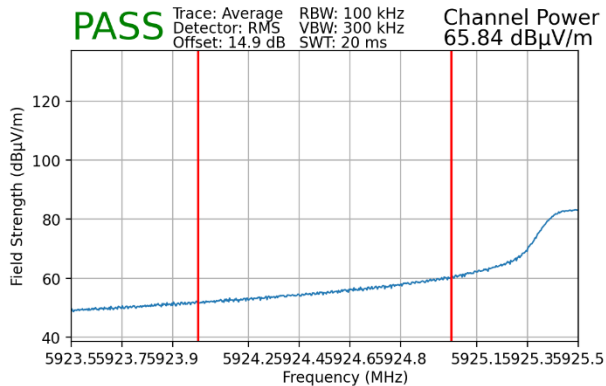


Plot 7-274. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 106T)

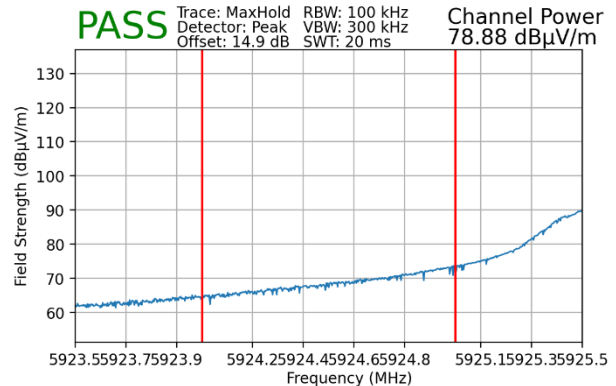


Plot 7-275. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 106T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index	54
Distance of Measurements:	3 Meters
Operating Frequency:	7115MHz
Channel:	233

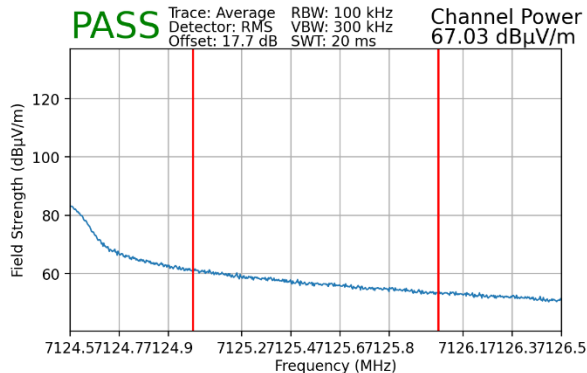

Plot 7-276. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 106T)

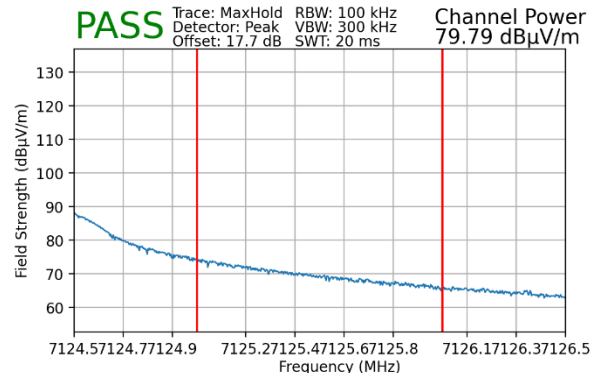


Plot 7-277. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 106T)


FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 202 of 207

7.7.4 MIMO Radiated Band Edge Measurements (20MHz BW – Full Tone – 242T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index	61
Distance of Measurements:	3 Meters
Operating Frequency:	5935MHz
Channel:	2

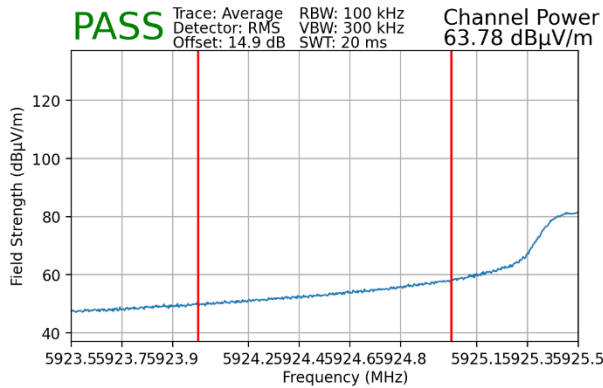


Plot 7-278. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 242T)

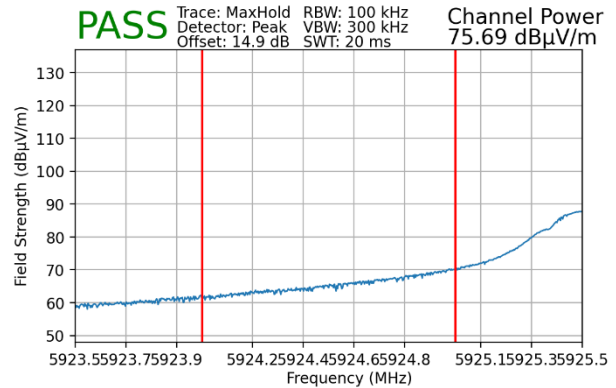


Plot 7-279. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 242T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index	61
Distance of Measurements:	3 Meters
Operating Frequency:	7115MHz
Channel:	233

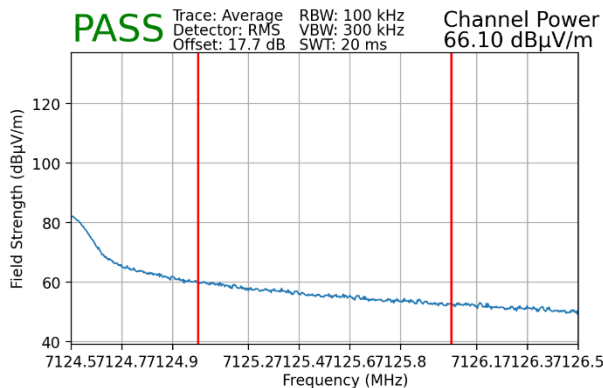

Plot 7-280. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 242T)

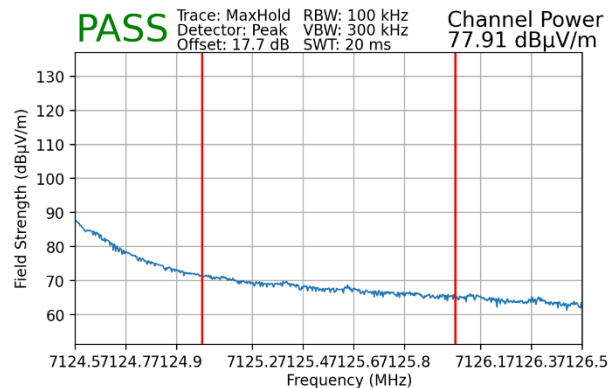


Plot 7-281. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 242T)


FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 203 of 207

7.7.5 MIMO Radiated Band Edge Measurements (40MHz BW – Full Tone – 484T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index	65
Distance of Measurements:	3 Meters
Operating Frequency:	5965MHz
Channel:	3

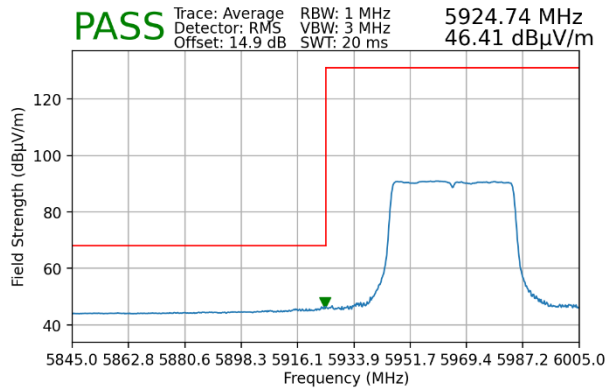


Plot 7-282. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 484T)

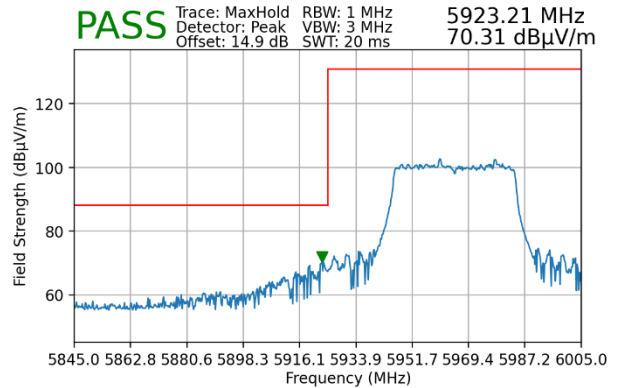


Plot 7-283. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 484T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index	65
Distance of Measurements:	3 Meters
Operating Frequency:	7085MHz
Channel:	227

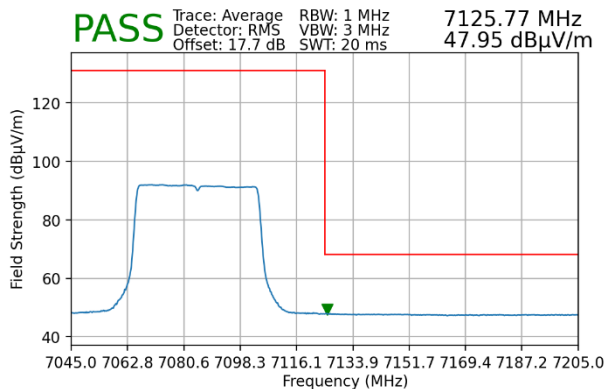

Plot 7-284. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 484T)

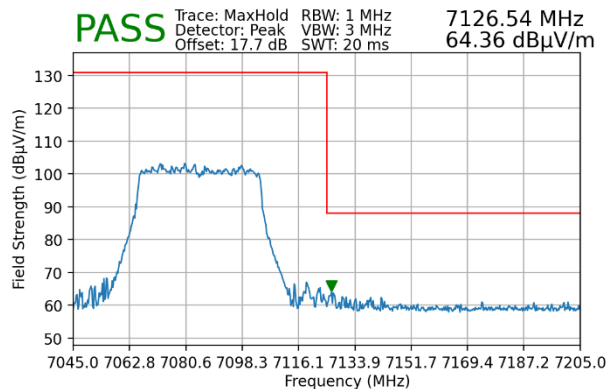


Plot 7-285. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 484T)


FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 204 of 207

7.7.6 MIMO Radiated Band Edge Measurements (80MHz BW – Full Tone – 996T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index	67
Distance of Measurements:	3 Meters
Operating Frequency:	5985MHz
Channel:	7

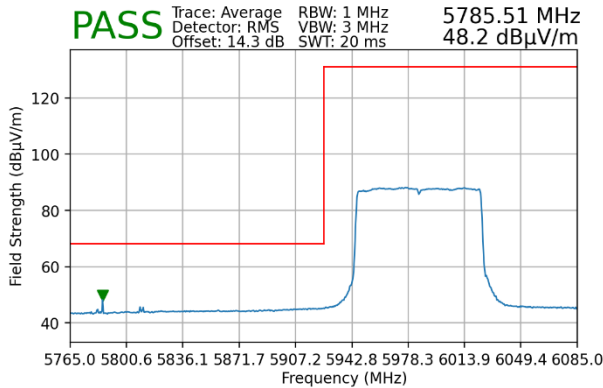


Plot 7-286. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 996T)

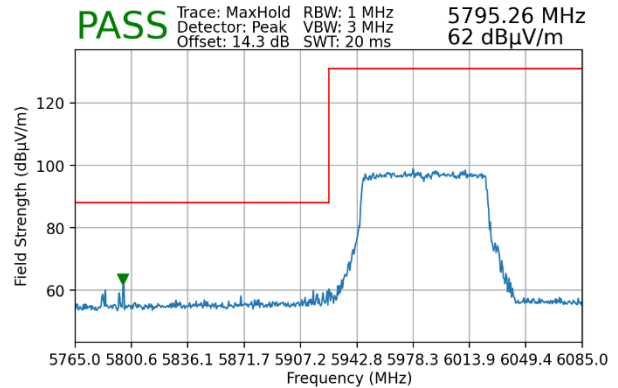


Plot 7-287. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 996T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index	67
Distance of Measurements:	3 Meters
Operating Frequency:	7025MHz
Channel:	215

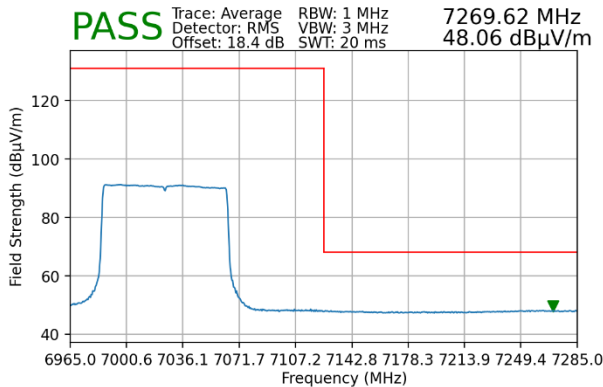

Plot 7-288. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 996T)

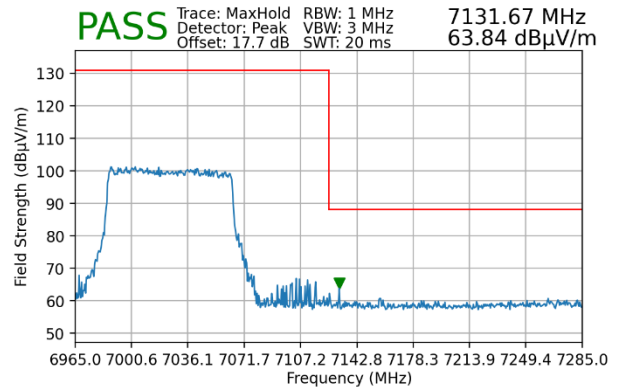


Plot 7-289. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 996T)


FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 205 of 207

7.7.7 MIMO Radiated Band Edge Measurements (160MHz BW – Full Tone – 2x996T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index	68
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

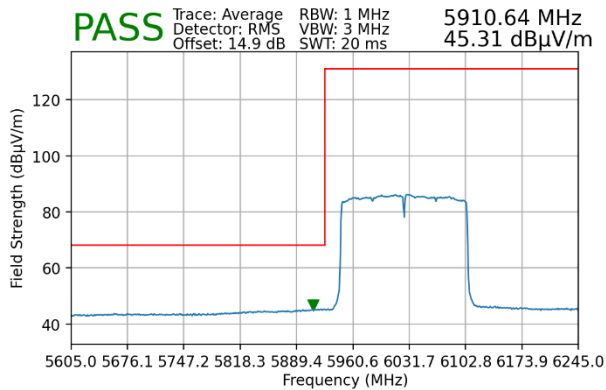


Plot 7-290. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 2x996T)

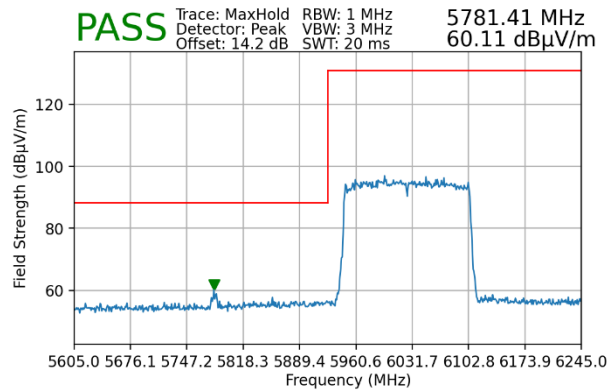


Plot 7-291. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 2x996T)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index	68
Distance of Measurements:	3 Meters
Operating Frequency:	6985MHz
Channel:	207

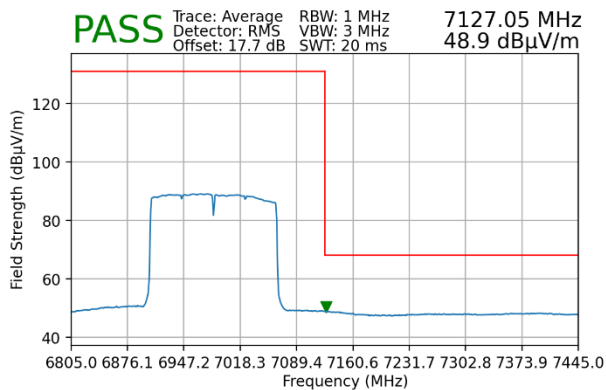

Plot 7-292. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 2x996T)

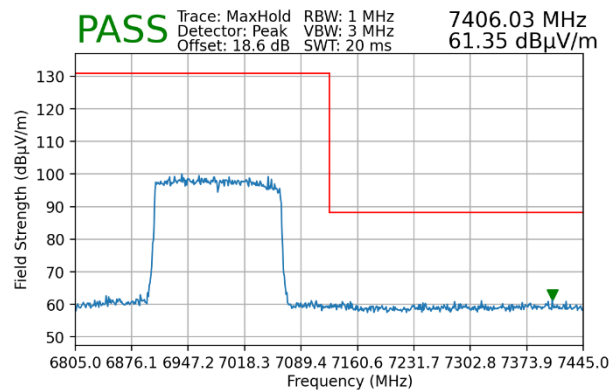

Plot 7-293. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 2x996T)

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 206 of 207

8 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMS711U** is in compliance with FCC Part Subpart E (15.407) of the FCC rules for operation as a client device.

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-20.A3L	Test Dates: 5/24-8/1/2023	EUT Type: Portable Handset	Page 207 of 207