



Plot 7-107. Conducted Spurious Plot MIMO ANT1 (802.11b – Ch. 11)

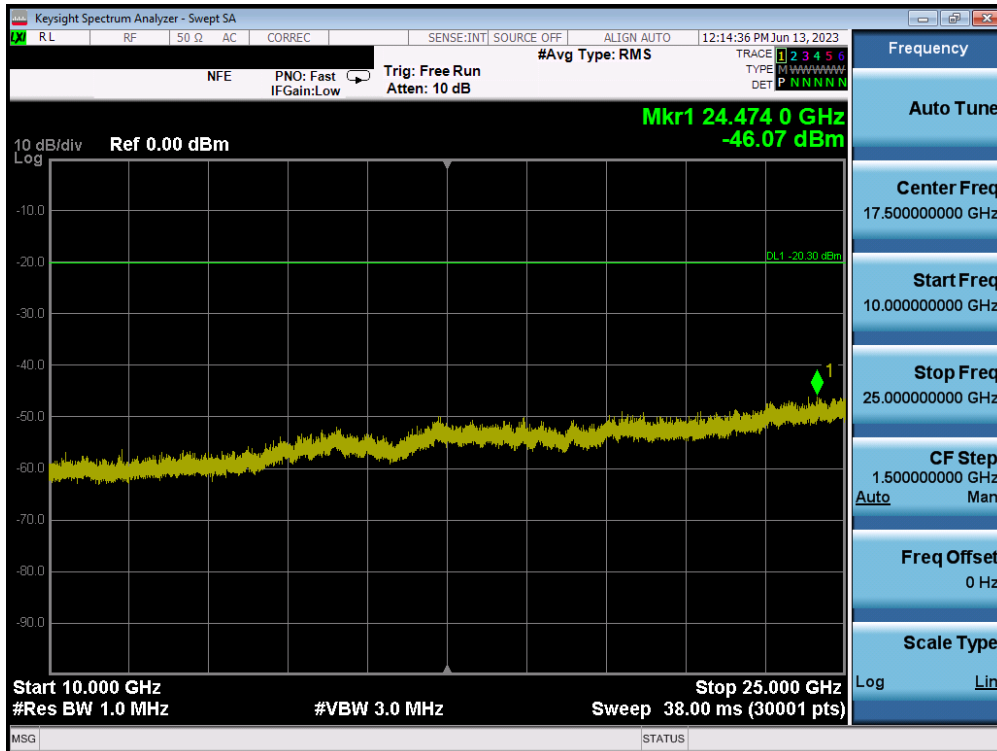


Plot 7-108. Conducted Spurious Plot MIMO ANT1 (802.11b – Ch. 11)

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-15.A3L	Test Dates: 5/24-7/31/2023	EUT Type: Portable Handset	Page 80 of 108

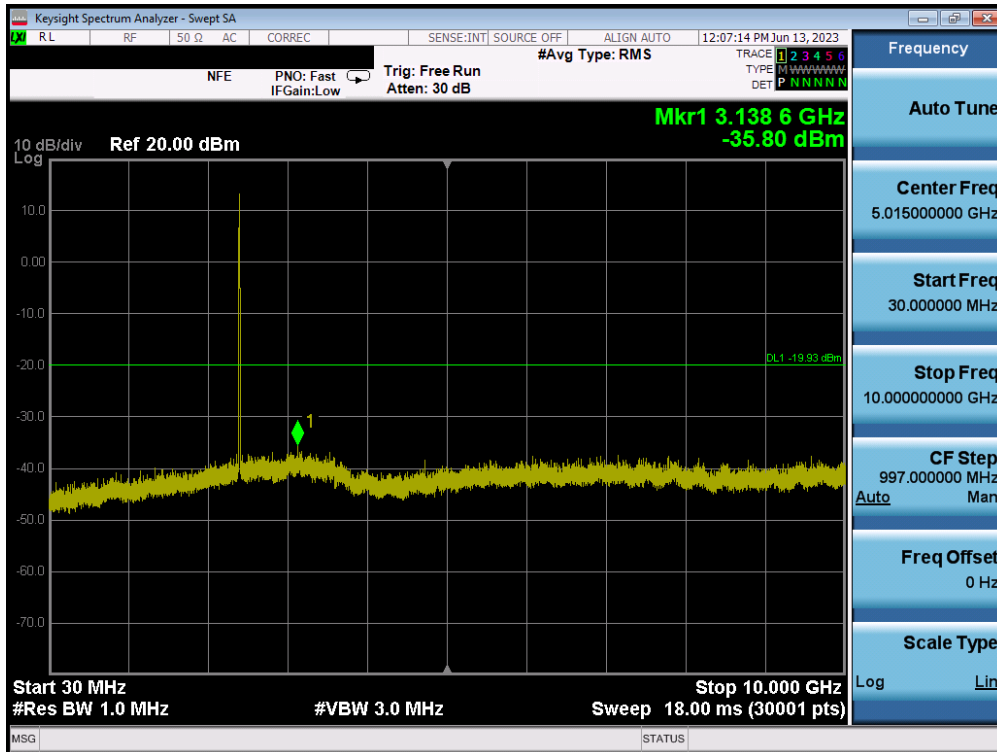


Plot 7-109. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 1)

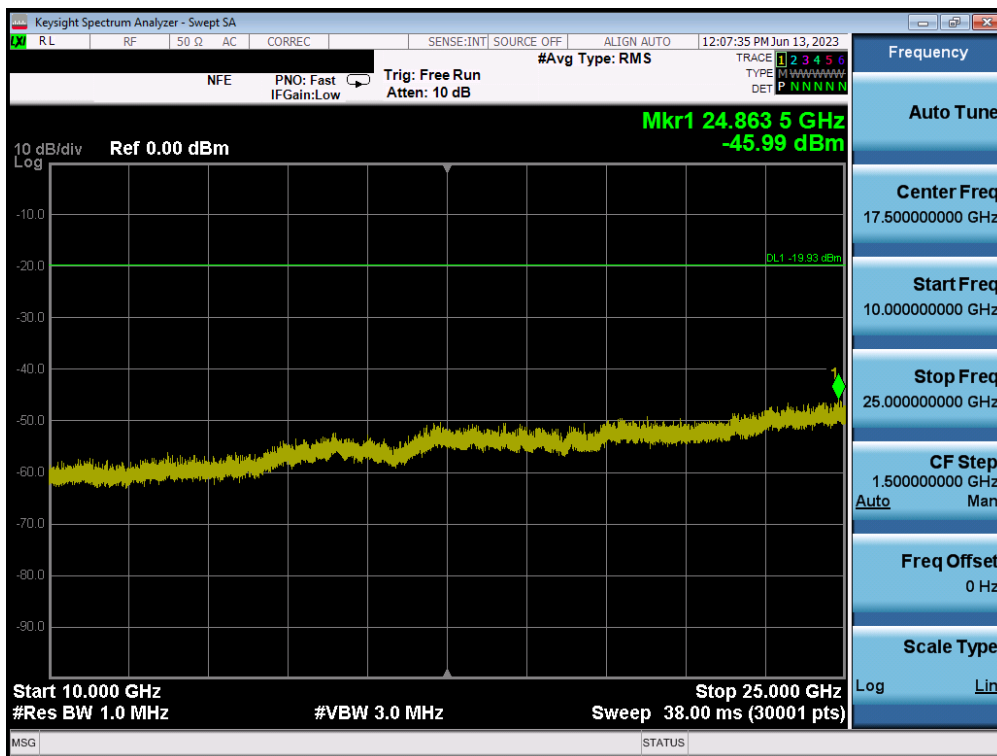


Plot 7-110. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 1)

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-15.A3L	Test Dates: 5/24-7/31/2023	EUT Type: Portable Handset	Page 81 of 108

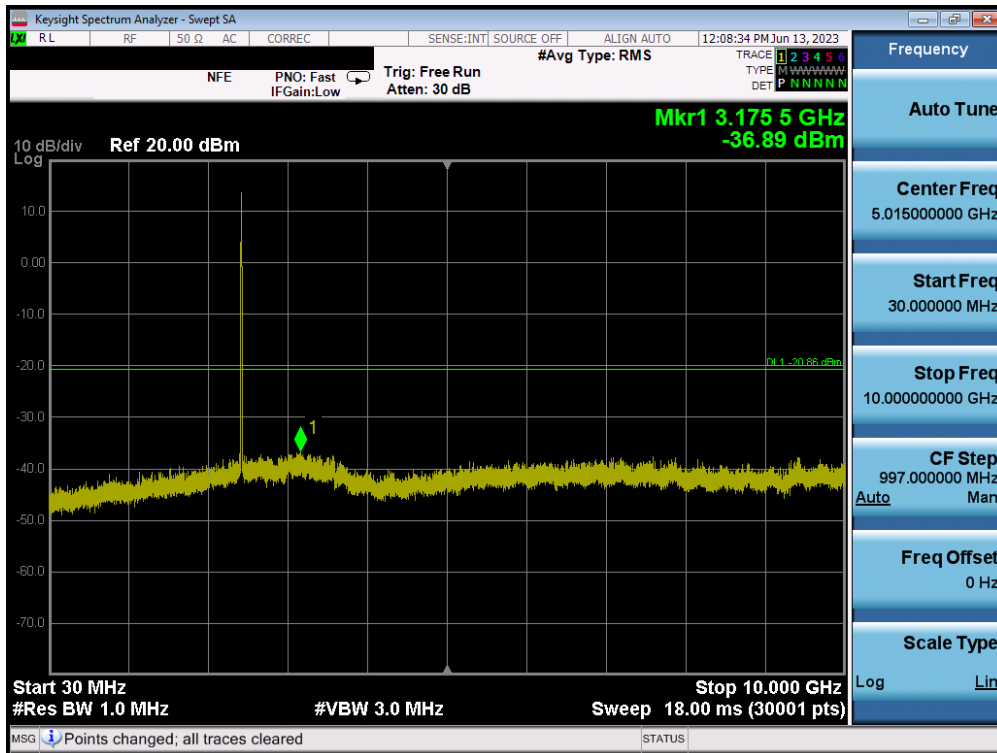


Plot 7-111. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 6)

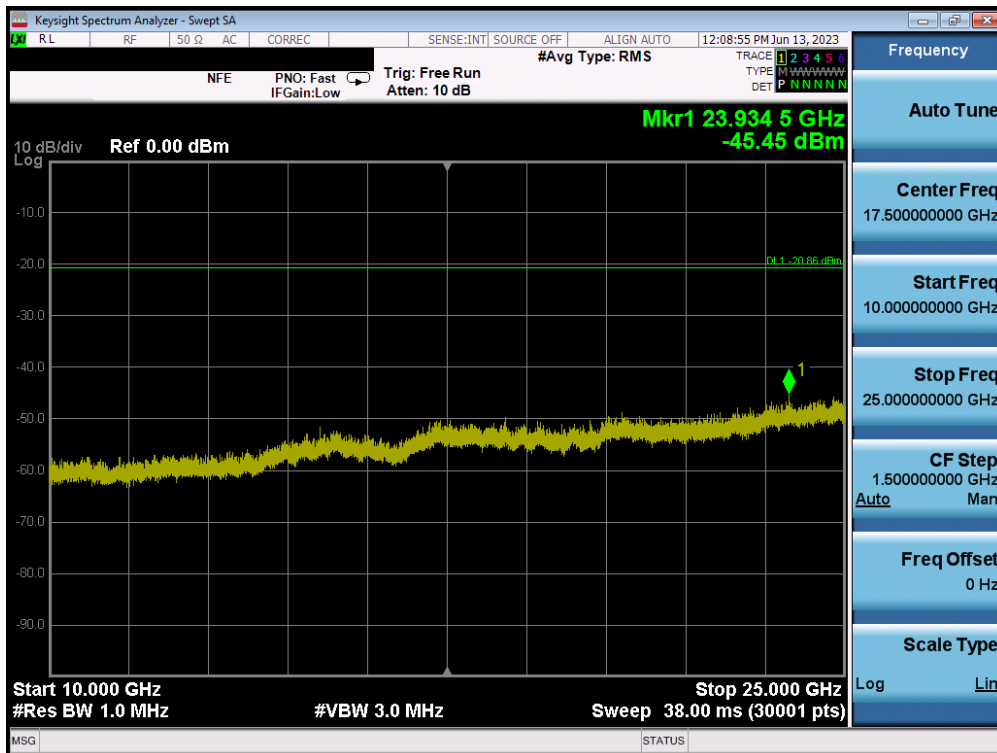


Plot 7-112. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 6)

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-15.A3L	Test Dates: 5/24-7/31/2023	EUT Type: Portable Handset	Page 82 of 108

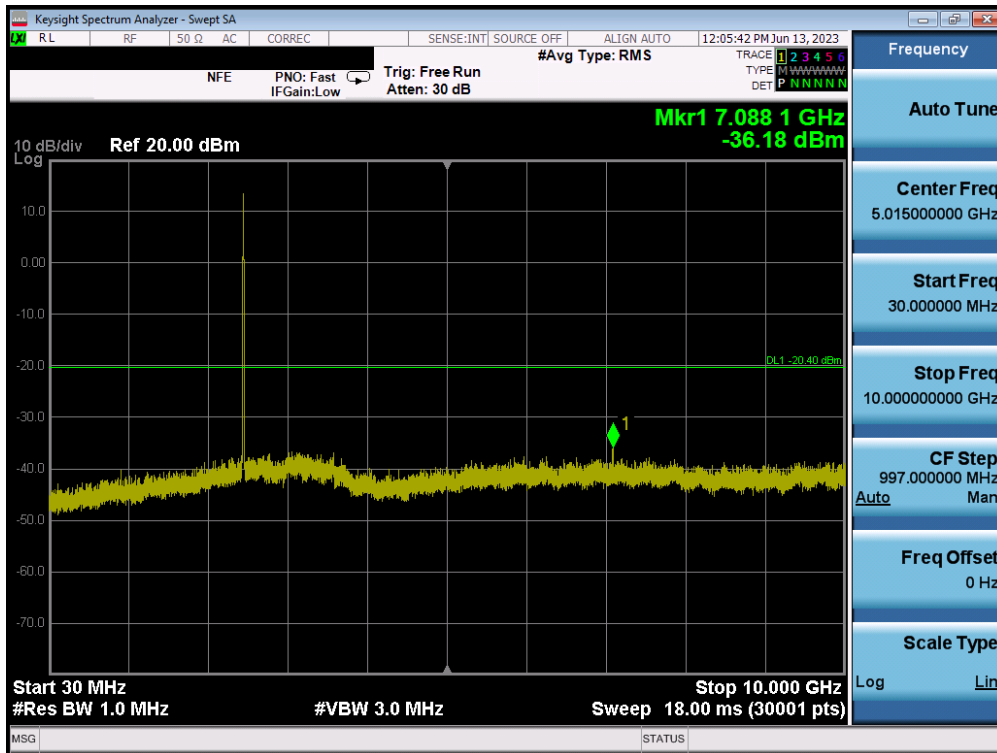

Plot 7-113. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 11)

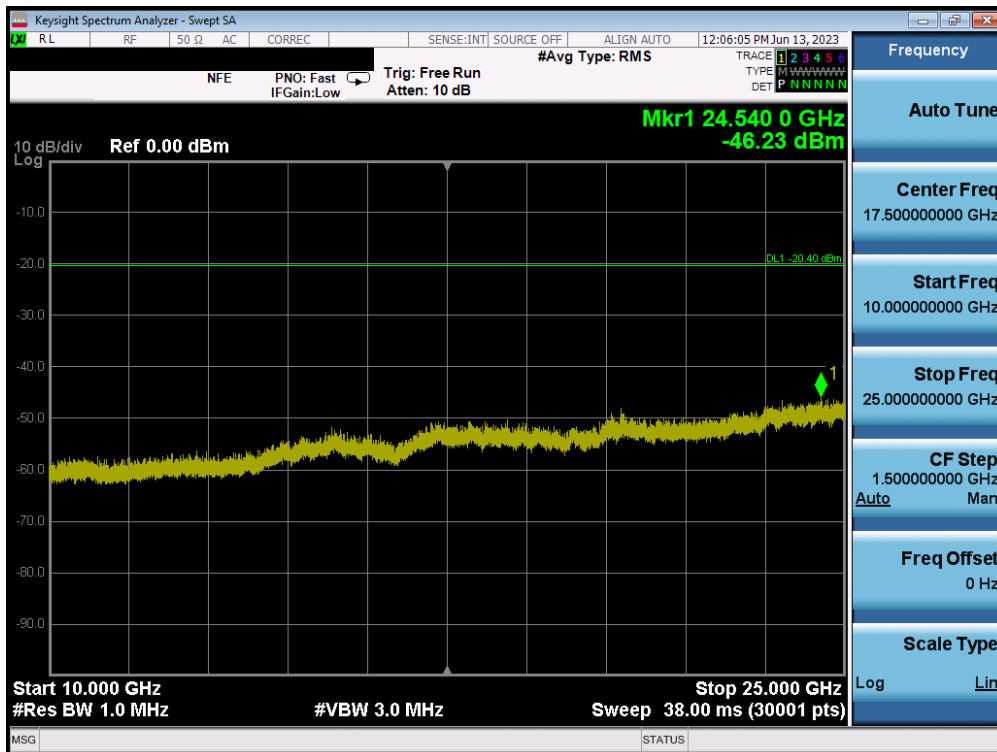

Plot 7-114. Conducted Spurious Plot MIMO ANT2 (802.11b – Ch. 11)

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-15.A3L	Test Dates: 5/24-7/31/2023	EUT Type: Portable Handset	Page 83 of 108

## 7.7 Radiated Emission Measurements

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst-case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in FCC §15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown FCC §15.209 and RSS-Gen (8.9).***

Frequency	Field Strength [ $\mu\text{V/m}$ ]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table 7-11. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2013 – Section 6.6.4.3

### Test Settings – Above 1GHz

#### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be  $\geq 2 \times \text{span} \backslash \backslash \text{RBW}$ )
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-15.A3L	Test Dates: 5/24-7/31/2023	EUT Type: Portable Handset	Page 84 of 108

**Peak Field Strength Measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


**Test Settings – Below 1GHz**

**Quasi-Peak Field Strength Measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

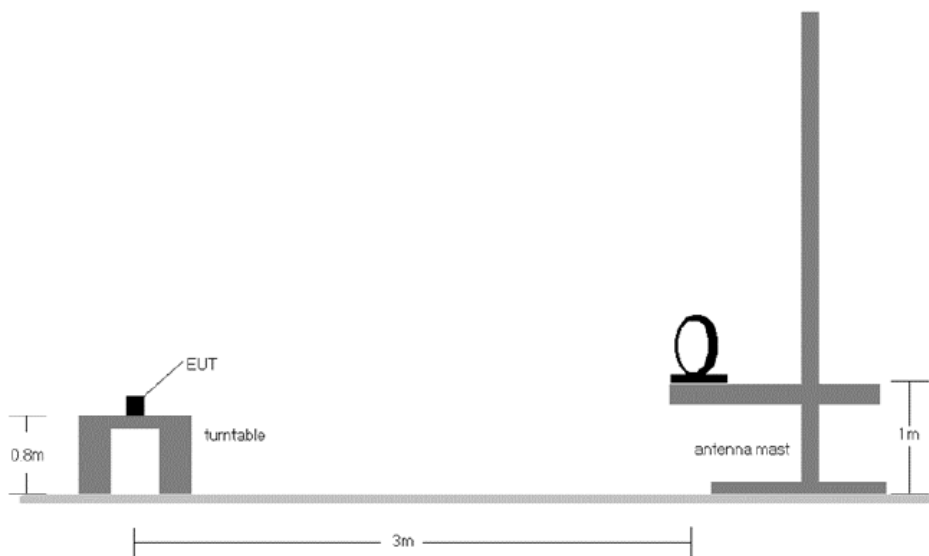


**Figure 7-6. Radiated Test Setup < 30MHz**

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-15.A3L	Test Dates: 5/24-7/31/2023	EUT Type: Portable Handset	Page 85 of 108

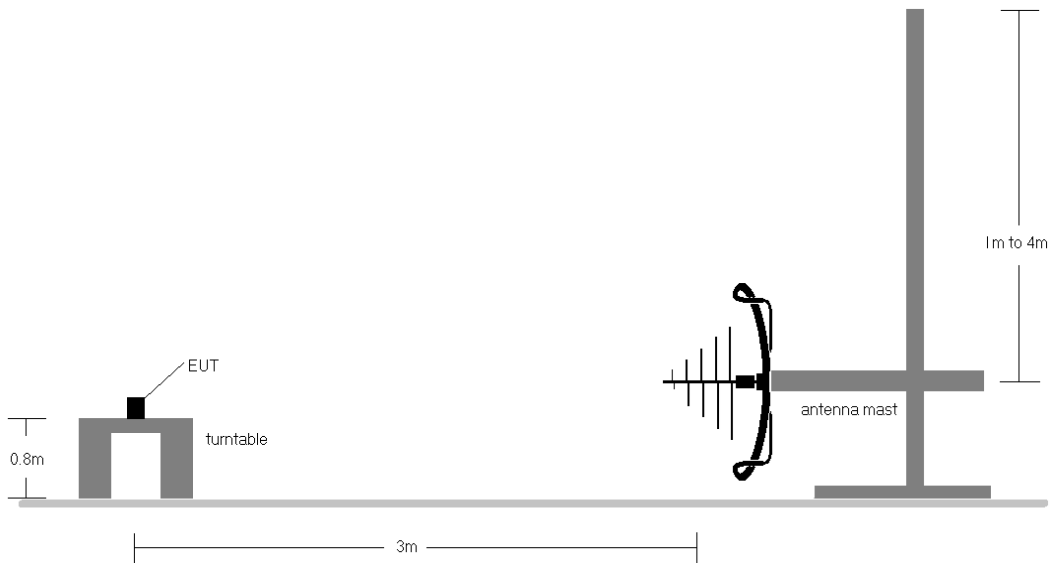

**Figure 7-7. Radiated Test Setup < 1GHz**

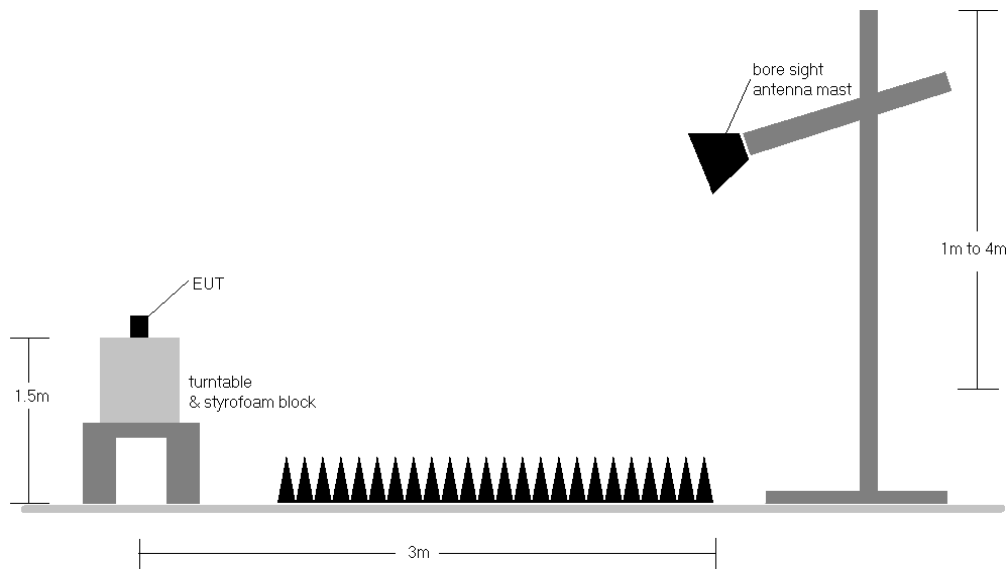

**Figure 7-8. Radiated Test Setup > 1GHz**

**Test Notes**

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of ANSI C63.10-2013 Section 11.3 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limits shown in §15.209.

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-15.A3L	Test Dates: 5/24-7/31/2023	EUT Type: Portable Handset	Page 86 of 108

3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
9. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst-case results during the transmitter spurious emissions testing.
10. No spurious emissions were detected within 20dB of the limit below 30MHz.
11. The results recorded using the broadband antenna are known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
12. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

## **Sample Calculations**

### **Determining Spurious Emissions Levels**

- Field Strength Level  $_{[dB_{\mu V/m}]}$  = Analyzer Level  $_{[dBm]}$  + 107 + AFCL  $_{[dB/m]}$
- AFCL  $_{[dB/m]}$  = Antenna Factor  $_{[dB/m]}$  + Cable Loss  $_{[dB]}$
- Margin  $_{[dB]}$  = Field Strength Level  $_{[dB_{\mu V/m}]}$  – Limit  $_{[dB_{\mu V/m}]}$


### **Radiated Band Edge Measurement Offset**

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.7 was calculated using the formula:  
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Pre-amplifier Gain


FCC ID: A3LSMS711U	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2304260060-15.A3L	<b>Test Dates:</b> 5/24-7/31/2023	<b>EUT Type:</b> Portable Handset	Page 87 of 108




### 7.7.1 SISO Antenna-2 Radiated Spurious Emission Measurements

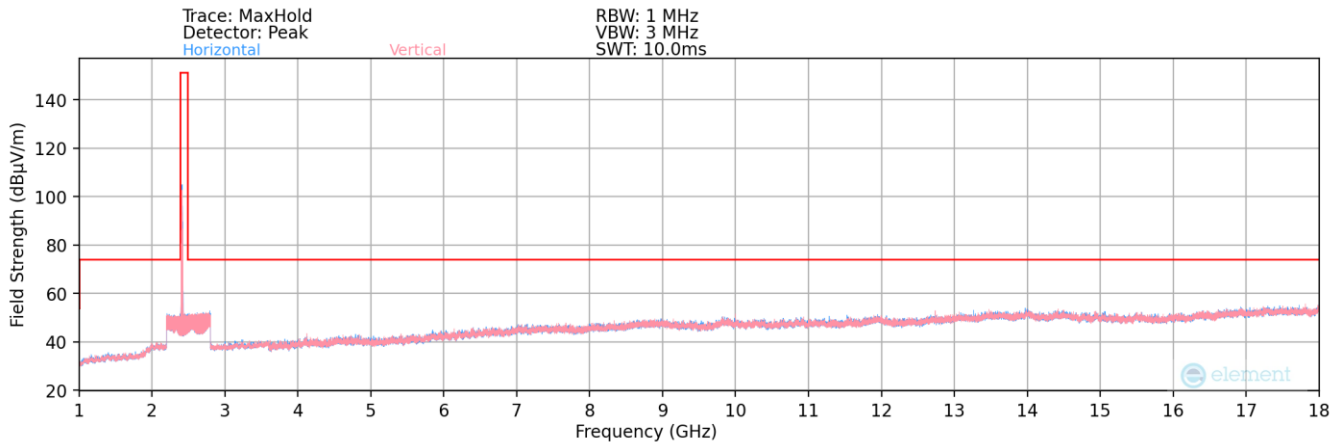

**Plot 7-115. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11b – Ch. 1)**

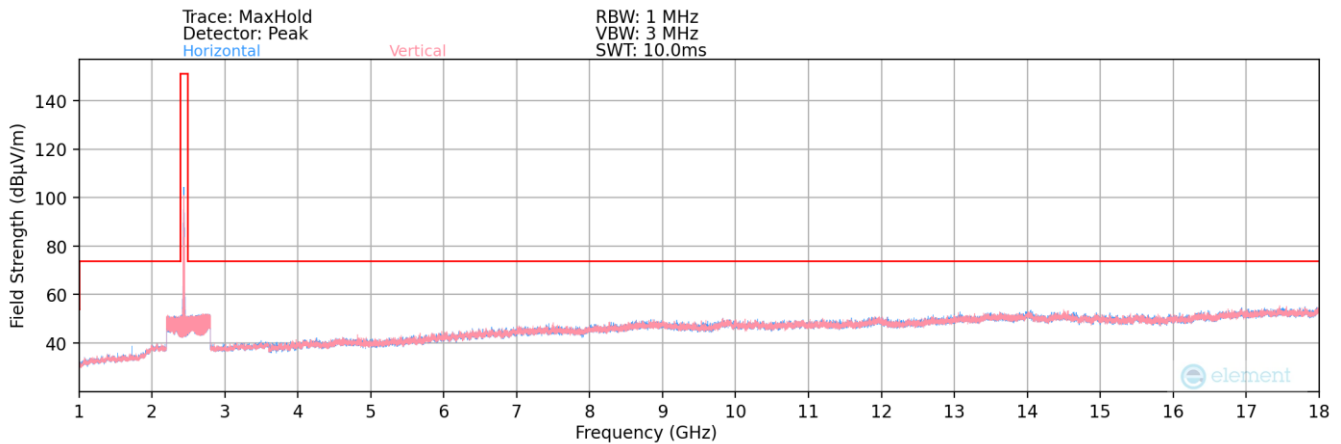


**Plot 7-116. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11b – Ch. 6)**

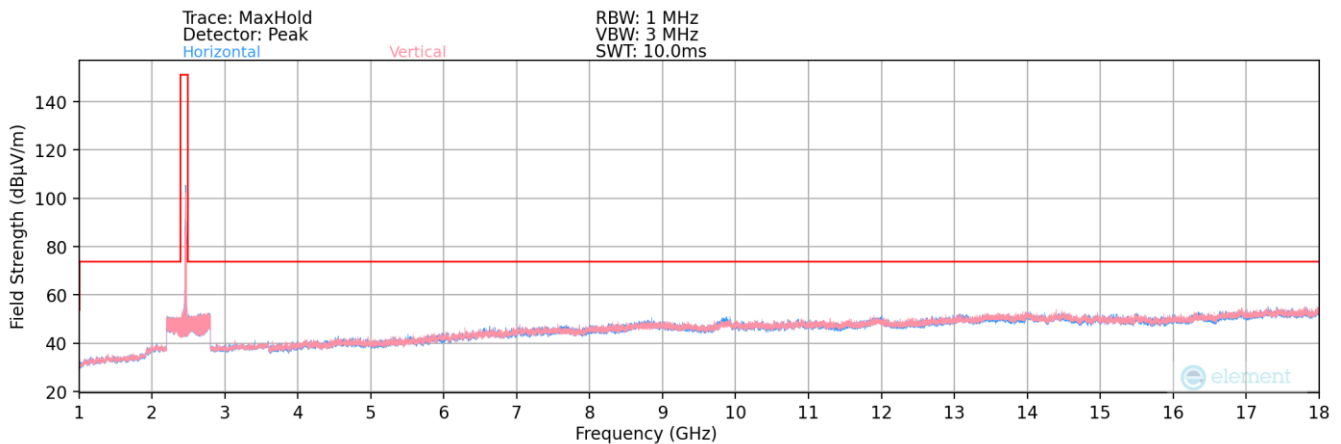

**Plot 7-117. Radiated Spurious Plot above 1GHz SISO ANT2 (802.11b – Ch. 11)**

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-15.A3L	Test Dates: 5/24-7/31/2023	EUT Type: Portable Handset	Page 88 of 108

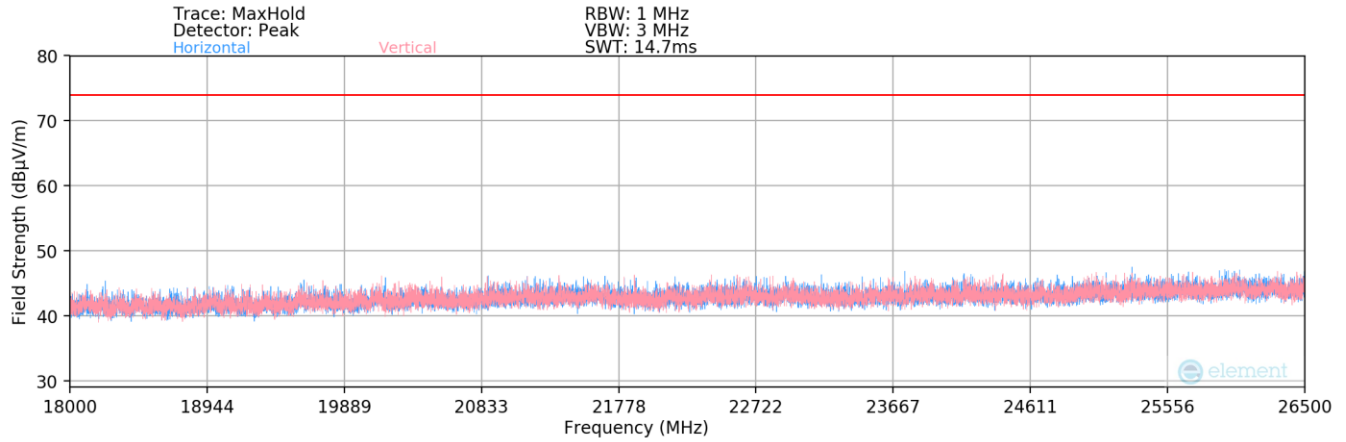

**Plot 7-118. Radiated Spurious Plot above 18GHz SISO ANT2**

<b>FCC ID:</b> A3LSMS711U	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2304260060-15.A3L	<b>Test Dates:</b> 5/24-7/31/2023	<b>EUT Type:</b> Portable Handset	Page 89 of 108

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4824.00	Avg	H	219	19	-74.40	2.68	35.28	53.98	-18.70
4824.00	Peak	H	219	19	-65.21	2.68	44.47	73.98	-29.51
12060.00	Avg	H	-	-	-79.97	12.71	39.74	53.98	-14.23
12060.00	Peak	H	-	-	-68.16	12.71	51.55	73.98	-22.42

**Table 7-12. Radiated Measurements SISO ANT2**

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 6

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4874.00	Avg	H	286	0	-74.38	2.89	35.51	53.98	-18.47
4874.00	Peak	H	286	0	-64.57	2.89	45.32	73.98	-28.66
7311.00	Avg	H	137	243	-77.30	8.87	38.57	53.98	-15.41
7311.00	Peak	H	137	243	-65.61	8.87	50.26	73.98	-23.72
12185.00	Avg	H	-	-	-80.14	12.99	39.85	53.98	-14.12
12185.00	Peak	H	-	-	-67.98	12.99	52.01	73.98	-21.96

**Table 7-13. Radiated Measurements SISO ANT2**

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-15.A3L	Test Dates: 5/24-7/31/2023	EUT Type: Portable Handset	Page 90 of 108

Worst Case Mode: 802.11b  
Worst Case Transfer Rate: 1 Mbps  
Distance of Measurements: 3 Meters  
Operating Frequency: 2462MHz  
Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4924.00	Avg	H	288	1	-75.56	2.87	34.31	53.98	-19.67
4924.00	Peak	H	288	1	-65.33	2.87	44.54	73.98	-29.44
7386.00	Avg	H	145	345	-76.74	8.86	39.12	53.98	-14.86
7386.00	Peak	H	145	345	-65.57	8.86	50.29	73.98	-23.69
12310.00	Avg	H	-	-	-80.46	13.13	39.67	53.98	-14.31
12310.00	Peak	H	-	-	-68.50	13.13	51.63	73.98	-22.35

**Table 7-14. Radiated Measurements SISO ANT2**


Worst Case Mode: 802.11b  
Worst Case Transfer Rate: 1 Mbps  
Distance of Measurements: 3 Meters  
Operating Frequency: 2462MHz  
Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4924.00	Avg	H	212	344	-76.01	2.87	33.86	53.98	-20.12
4924.00	Peak	H	212	344	-65.71	2.87	44.15	73.98	-29.83
7386.00	Avg	H	-	-	-78.62	8.86	37.24	53.98	-16.74
7386.00	Peak	H	-	-	-66.96	8.86	48.90	73.98	-25.08
12310.00	Avg	H	-	-	-80.32	13.13	39.81	53.98	-14.17
12310.00	Peak	H	-	-	-68.52	13.13	51.61	73.98	-22.37


**Table 7-15. Radiated Measurements SISO ANT2 with WCP**

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-15.A3L	Test Dates: 5/24-7/31/2023	EUT Type: Portable Handset	Page 91 of 108


## 7.7.2 MIMO Radiated Spurious Emission Measurements

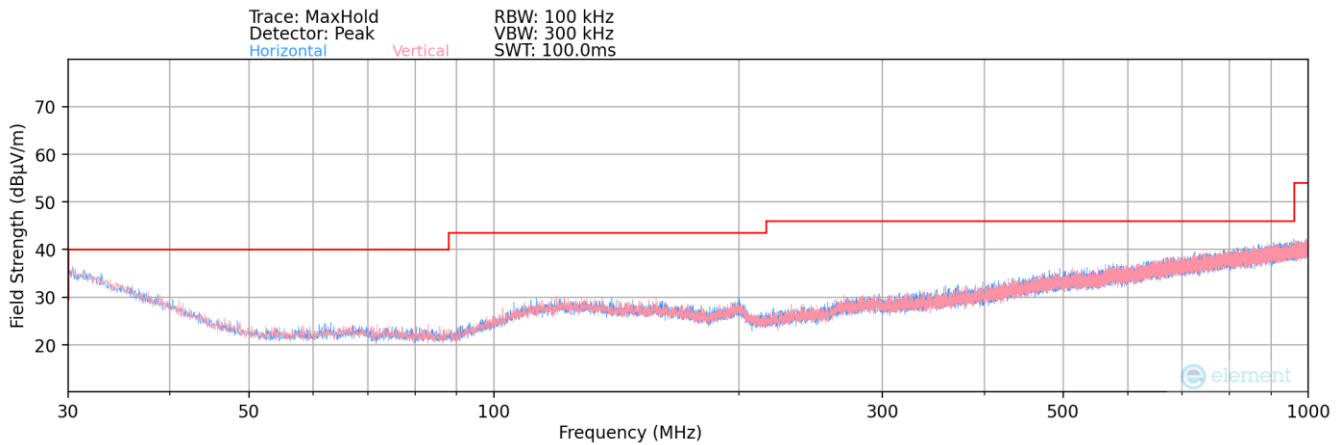

**Plot 7-119. Radiated Spurious Plot below 1GHz MIMO**

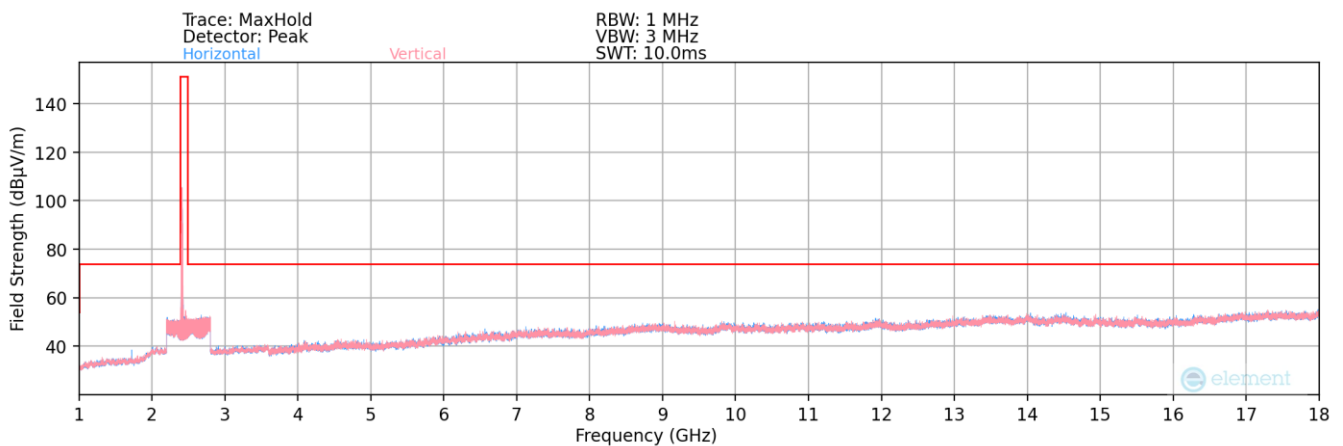


**Plot 7-120. Radiated Spurious Plot above 1GHz MIMO (802.11b – Ch. 1)**

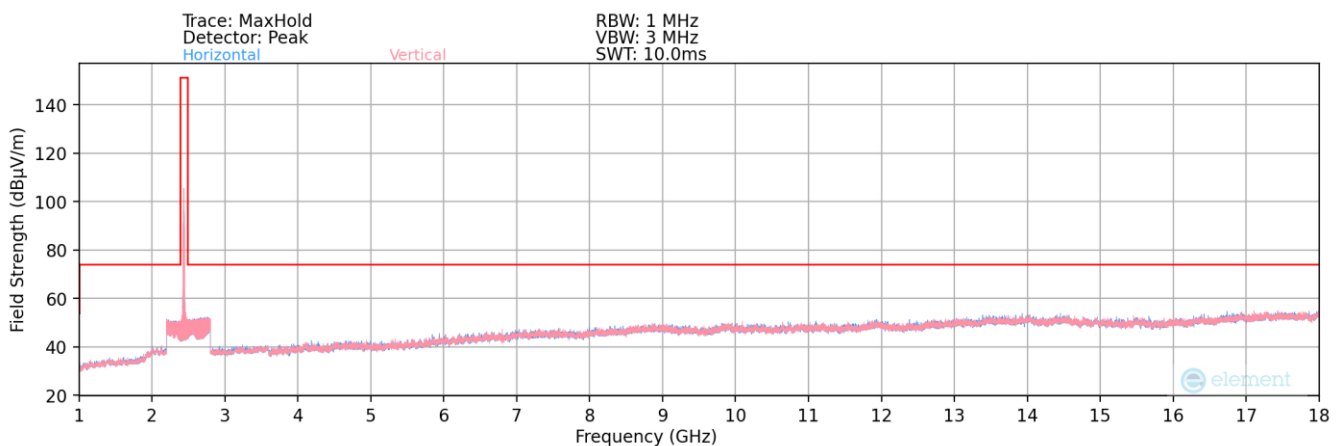


**Plot 7-121. Radiated Spurious Plot above 1GHz MIMO (802.11b – Ch. 6)**

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-15.A3L	Test Dates: 5/24-7/31/2023	EUT Type: Portable Handset	Page 92 of 108

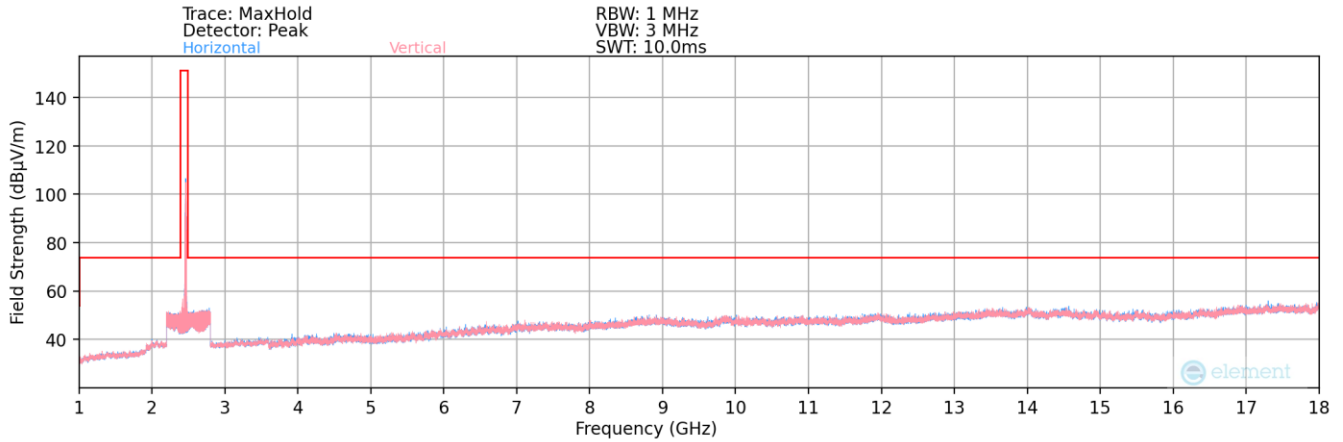

**Plot 7-122. Radiated Spurious Plot above 1GHz MIMO (802.11b – Ch. 11)**

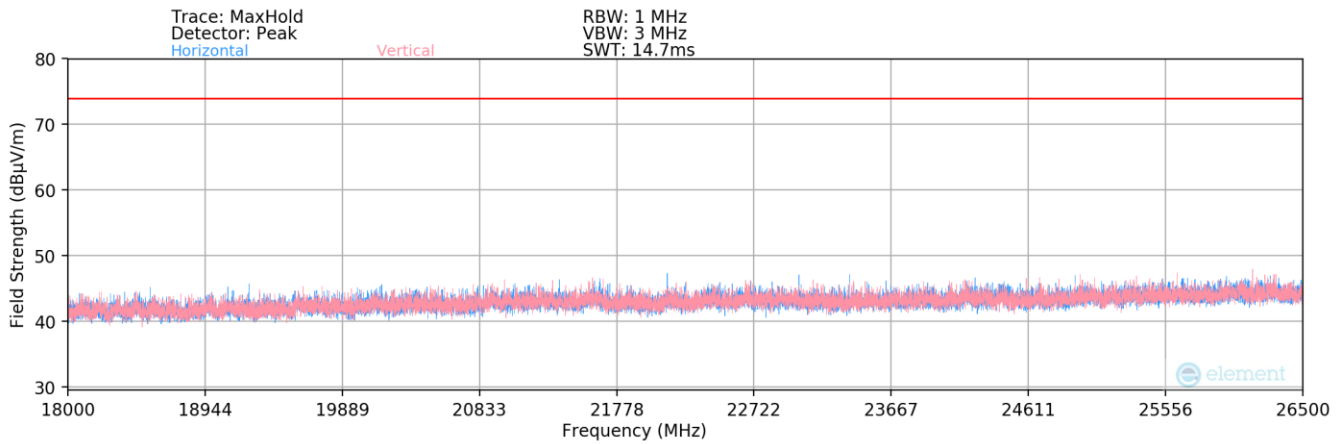

**Plot 7-123. Radiated Spurious Plot above 18GHz MIMO**

FCC ID: A3LSMS711U	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2304260060-15.A3L	Test Dates: 5/24-7/31/2023	EUT Type: Portable Handset	Page 93 of 108



Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4824.00	Avg	H	166	0	-76.88	9.15	39.27	53.98	-14.71
4824.00	Peak	H	166	0	-69.58	9.15	46.57	73.98	-27.41
12060.00	Avg	H	-	-	-85.30	22.59	44.29	53.98	-9.69
12060.00	Peak	H	-	-	-73.98	22.59	55.61	73.98	-18.37

**Table 7-16. Radiated Measurements MIMO**

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 6

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4874.00	Avg	H	162	355	-76.97	9.49	39.52	53.98	-14.46
4874.00	Peak	H	162	355	-69.11	9.49	47.38	73.98	-26.60
7311.00	Avg	H	-	-	-83.04	15.09	39.05	53.98	-14.93
7311.00	Peak	H	-	-	-72.26	15.09	49.83	73.98	-24.15
12185.00	Avg	H	-	-	-86.39	23.11	43.72	53.98	-10.26
12185.00	Peak	H	-	-	-75.12	23.11	54.99	73.98	-18.99

**Table 7-17. Radiated Measurements MIMO**

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-15.A3L	Test Dates: 5/24-7/31/2023	EUT Type: Portable Handset	Page 94 of 108

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4924.00	Avg	H	158	355	-77.92	9.70	38.78	53.98	-15.19
4924.00	Peak	H	158	355	-69.91	9.70	46.79	73.98	-27.18
7386.00	Avg	H	-	-	-82.85	15.22	39.37	53.98	-14.61
7386.00	Peak	H	-	-	-72.02	15.22	50.20	73.98	-23.78
12310.00	Avg	H	-	-	-86.01	23.56	44.55	53.98	-9.43
12310.00	Peak	H	-	-	-75.15	23.56	55.41	73.98	-18.57

**Table 7-18. Radiated Measurements MIMO**

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 6

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4874.00	Avg	H	170	348	-74.40	2.89	35.49	53.98	-18.49
4874.00	Peak	H	170	348	-65.20	2.89	44.69	73.98	-29.29
7311.00	Avg	H	-	-	-79.26	8.87	36.61	53.98	-17.37
7311.00	Peak	H	-	-	-67.44	8.87	48.43	73.98	-25.55
12185.00	Avg	H	-	-	-80.23	12.99	39.76	53.98	-14.21
12185.00	Peak	H	-	-	-68.29	12.99	51.70	73.98	-22.27

**Table 7-19. Radiated Measurements MIMO with WCP**


FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-15.A3L	Test Dates: 5/24-7/31/2023	EUT Type: Portable Handset	Page 95 of 108




### 7.7.3 Simultaneous Tx Radiated Spurious Emissions Measurements

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1, 2	1, 2
Channel	6	120
Operating Frequency (MHz)	2437	5600
Data Rate (Mbps)	1	6
Mode	802.11b	802.11a

**Table 7-20. Simultaneous Transmission Config**

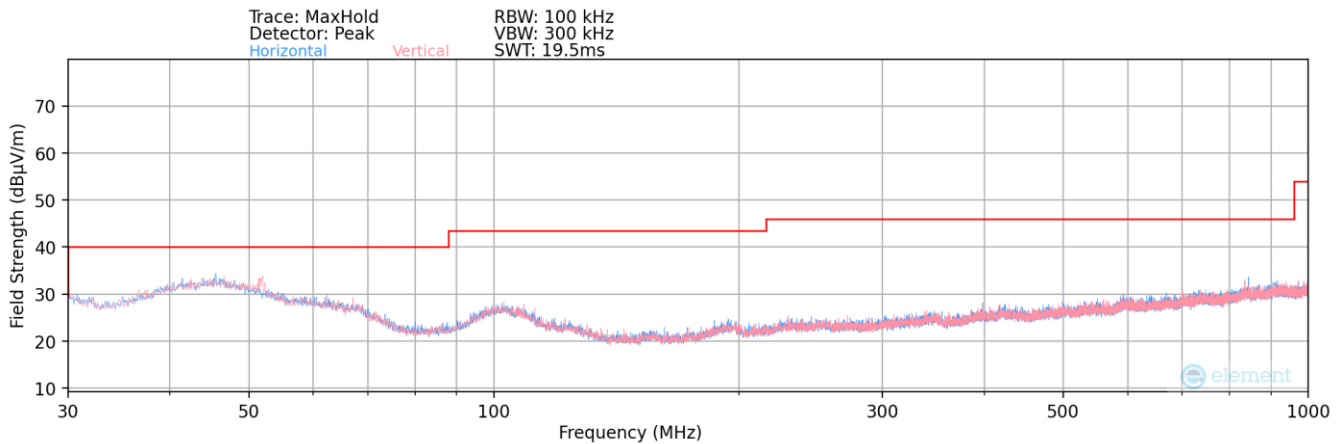


**Plot 7-124. Radiated Spurious Plot below 1GHz (2.4GHz – 5GHz)**

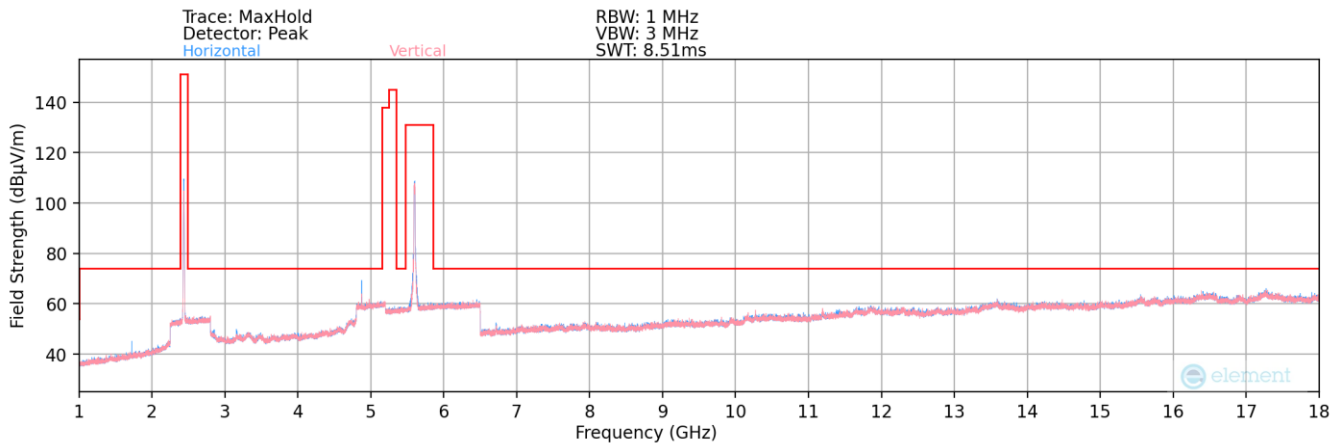


**Plot 7-125. Radiated Spurious Plot above 1GHz (2.4GHz – 5GHz)**

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-15.A3L	Test Dates: 5/24-7/31/2023	EUT Type: Portable Handset	Page 96 of 108

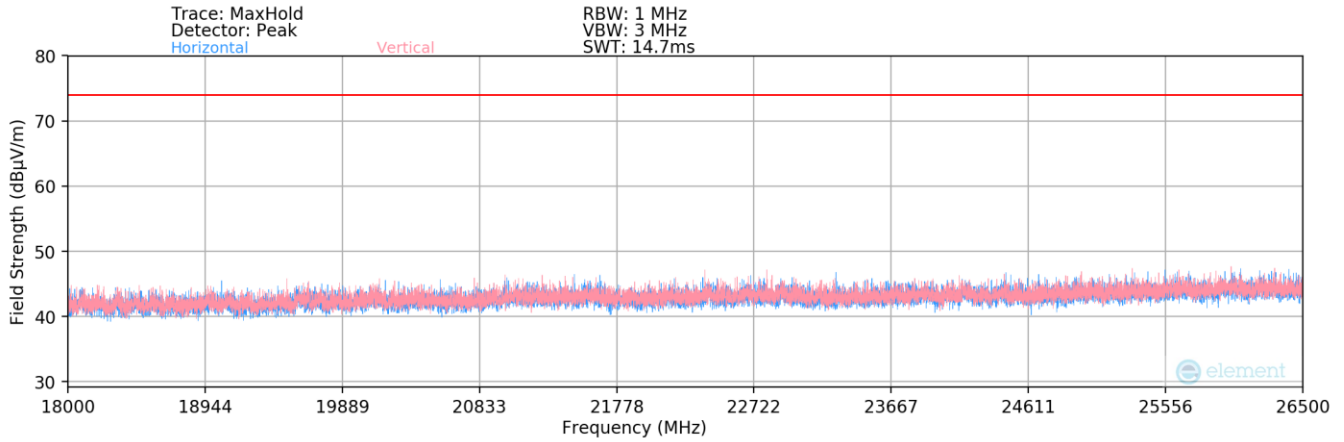

**Plot 7-126. Radiated Spurious Plot 18GHz – 26.5GHz (2.4GHz – 5GHz)**

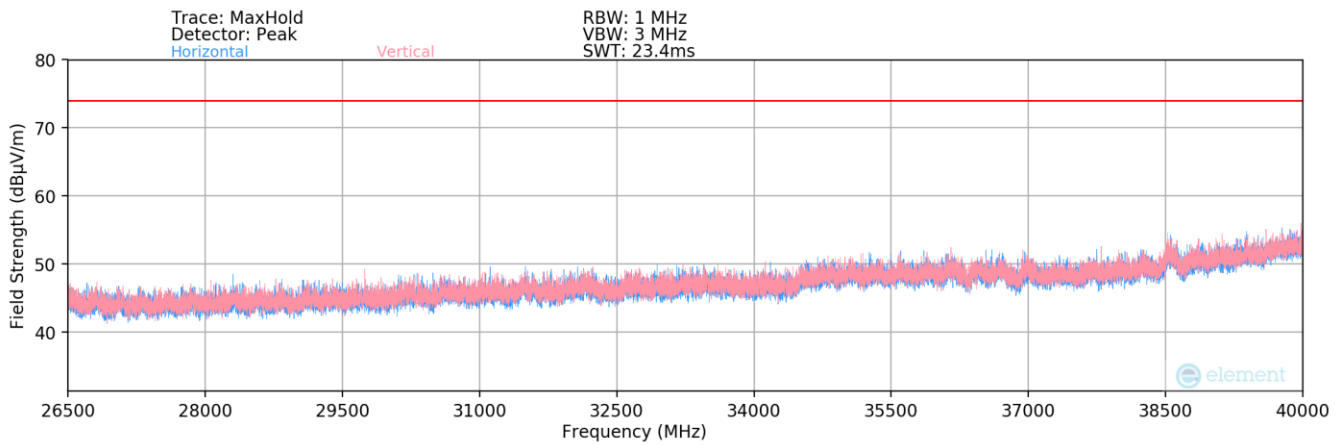

**Plot 7-127. Radiated Spurious Plot above 26.5GHz (2.4GHz – 5GHz)**

FCC ID: A3LSMS711U	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2304260060-15.A3L	Test Dates: 5/24-7/31/2023	EUT Type: Portable Handset	Page 97 of 108


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
726.00	Peak	H	-	-	-75.48	-0.61	0.00	30.91	46.02	-15.11
1711.00	Peak	H	-	-	-66.47	1.04	0.00	41.57	68.20	-26.63
3163.00	Peak	H	-	-	-69.20	7.10	0.00	44.90	68.20	-23.30
6721.80	Peak	H	100	145	-67.60	14.30	0.00	53.70	68.20	-14.50
* 8037.00	Average	H	101	167	-80.65	15.92	0.00	42.27	53.98	-11.71
* 8037.00	Peak	H	101	167	-70.02	15.92	0.00	52.90	73.98	-21.08
8763.00	Peak	H	-	-	-71.27	17.05	0.00	52.78	68.20	-15.42
10474.00	Peak	H	-	-	-72.16	21.20	0.00	56.04	68.20	-12.16
* 13637.00	Average	H	-	-	-83.65	25.18	0.00	48.53	53.98	-5.45
* 13637.00	Peak	H	-	-	-72.20	25.18	0.00	59.98	73.98	-14.00
* 19237.00	Average	H	-	-	-65.92	2.39	-9.54	33.93	53.98	-20.05
* 19237.00	Peak	H	-	-	-56.27	2.39	-9.54	43.57	73.98	-30.41

**Table 7-21. Radiated Spurious Emission Measurements (2.4GHz – 5GHz)**


FCC ID: A3LSMS711U	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2304260060-15.A3L	Test Dates: 5/24-7/31/2023	EUT Type: Portable Handset	Page 98 of 108

Description	2.4 GHz Emission	6 GHz Emission
Antenna	1, 2	1, 2
Channel	6	2
Operating Frequency (MHz)	2437	5935
Data Rate (Mbps)	1	6
Mode	802.11b	802.11a

**Table 7-22. Simultaneous Transmission Config**

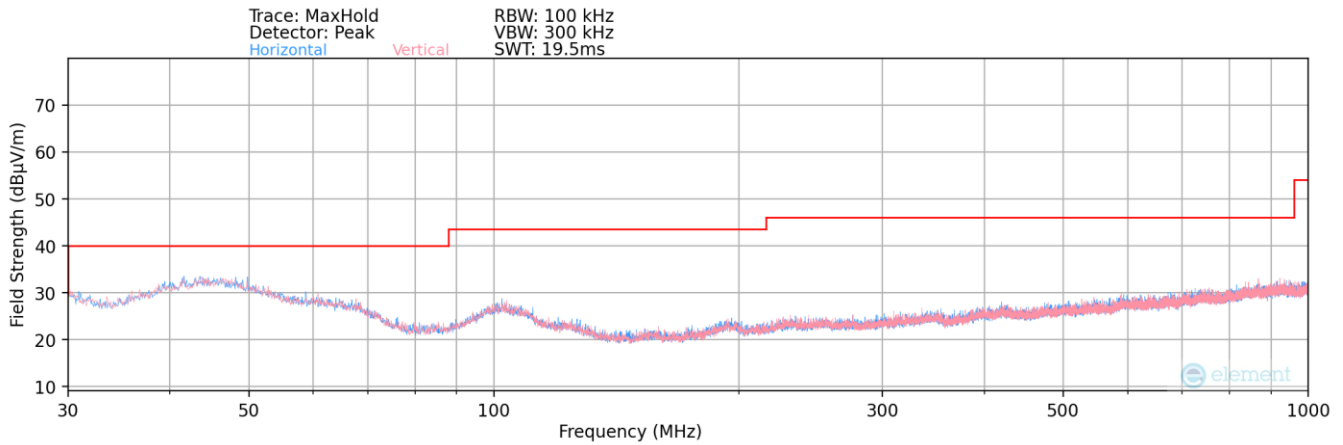


**Plot 7-128. Radiated Spurious Plot below 1GHz (2.4GHz -6GHz)**

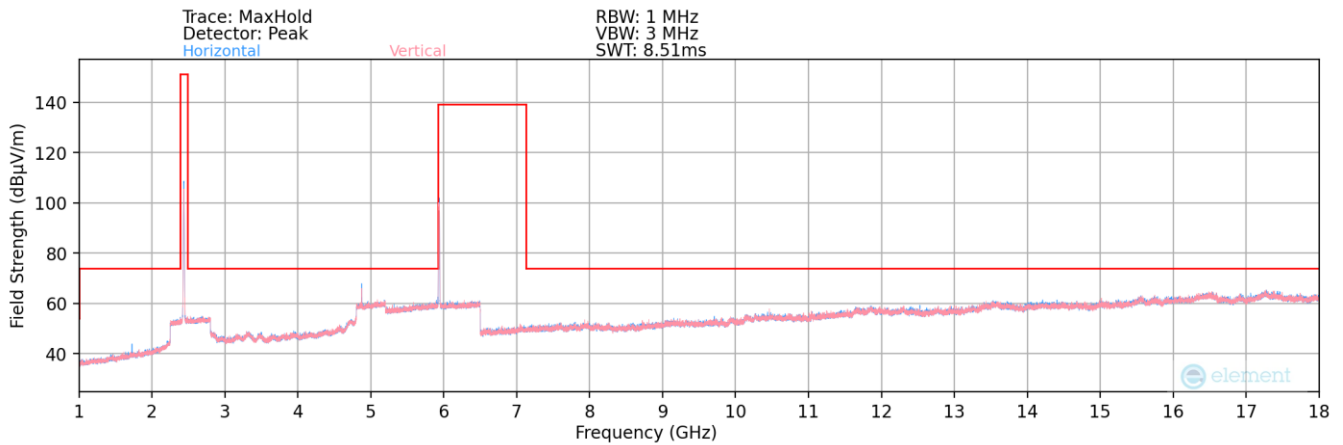


**Plot 7-129. Radiated Spurious Plot above 1GHz (2.4GHz -6GHz)**

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-15.A3L	Test Dates: 5/24-7/31/2023	EUT Type: Portable Handset	Page 99 of 108

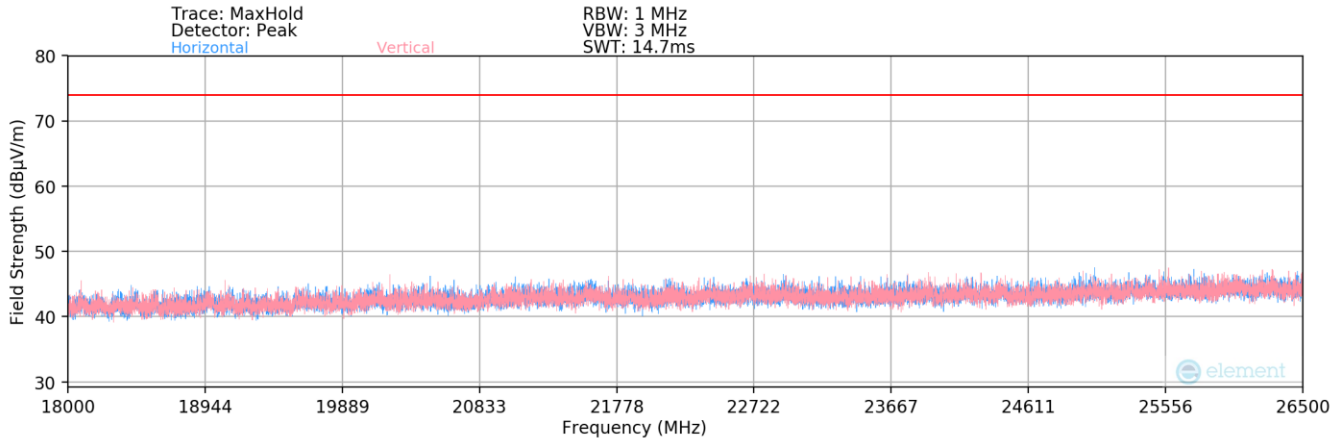

**Plot 7-130. Radiated Spurious Plot 18GHz – 26.5GHz (2.4GHz –6GHz)**

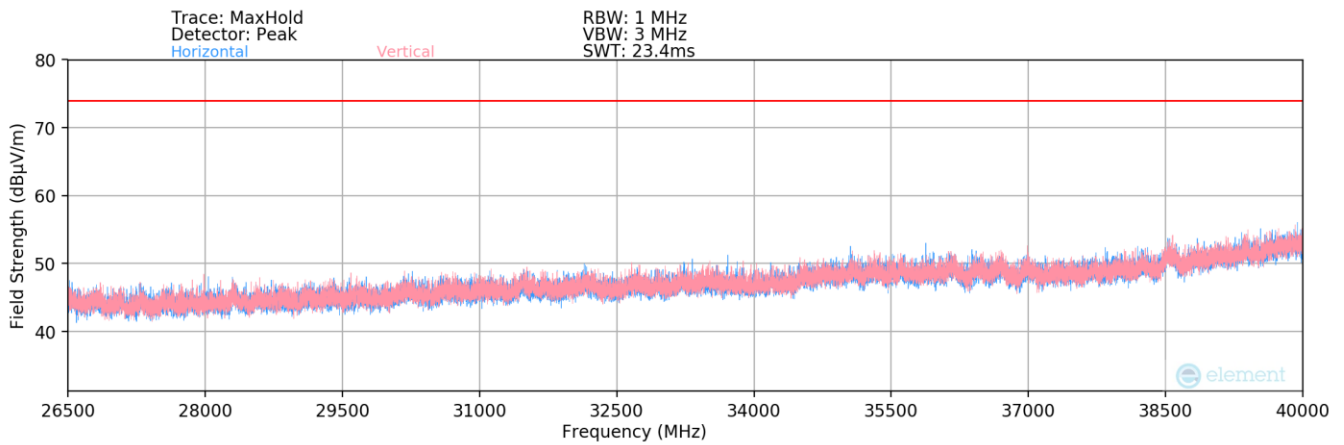

**Plot 7-131. Radiated Spurious Plot above 26.5GHz (2.4GHz –6GHz)**

FCC ID: A3LSMS711U	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2304260060-15.A3L	Test Dates: 5/24-7/31/2023	EUT Type: Portable Handset	Page 100 of 108

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
315.00	Peak	H	-	-	-72.79	-8.17	0.00	26.04	46.02	-19.98
* 1061.00	Average	H	-	-	-77.68	-3.09	0.00	26.23	53.98	-27.75
* 1061.00	Peak	H	-	-	-65.87	-3.09	0.00	38.04	73.98	-35.94
3498.00	Peak	H	-	-	-68.39	8.06	0.00	46.67	68.20	-21.53
6996.00	Peak	H	-	-	-70.37	14.37	0.00	51.00	68.20	-17.20
* 8372.00	Average	H	-	-	-83.23	16.66	0.00	40.43	53.98	-13.55
* 8372.00	Peak	H	-	-	-72.12	16.66	0.00	51.54	73.98	-22.44
* 9433.00	Average	H	-	-	-83.72	18.56	0.00	41.84	53.98	-12.14
* 9433.00	Peak	H	-	-	-72.02	18.56	0.00	53.54	73.98	-20.44
* 10809.00	Average	H	-	-	-83.60	20.66	0.00	44.06	53.98	-9.92
* 10809.00	Peak	H	-	-	-71.64	20.66	0.00	56.02	73.98	-17.96
* 20242.00	Average	H	-	-	-66.26	3.43	-9.54	34.62	53.98	-19.36
* 20242.00	Peak	H	-	-	-56.28	3.43	-9.54	44.61	73.98	-29.37


**Table 7-23. Radiated Spurious Emission Measurements (2.4GHz –6GHz)**

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-15.A3L	Test Dates: 5/24-7/31/2023	EUT Type: Portable Handset	Page 101 of 108


### 7.7.4 SISO Antenna-2 Radiated Restricted Band Edge Measurements

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11g
Worst Case Transfer Rate:	6 Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

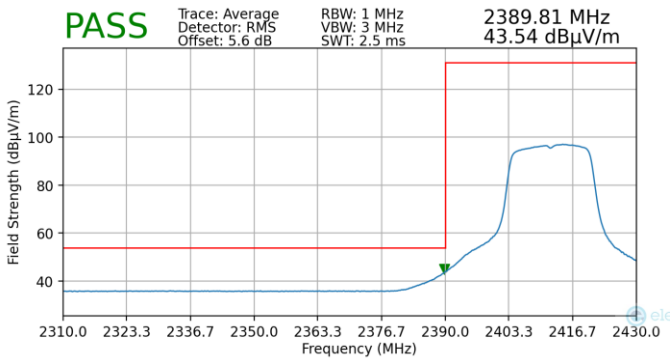


**Plot 7-132. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Average)**

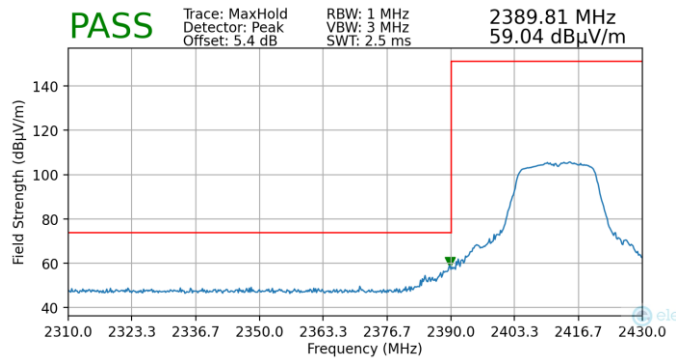


**Plot 7-133. Radiated Restricted Lower Band Edge Measurement SISO ANT2 (Peak)**

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

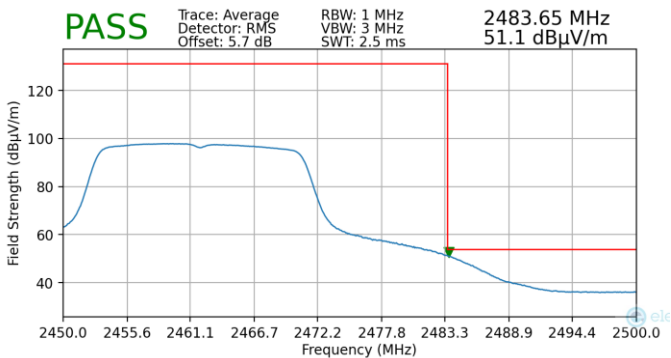

**Plot 7-134. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Average)**

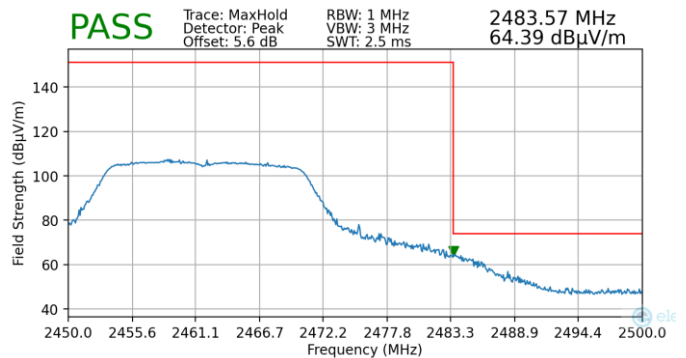


**Plot 7-135. Radiated Restricted Upper Band Edge Measurement SISO ANT2 (Peak)**

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-15.A3L	Test Dates: 5/24-7/31/2023	EUT Type: Portable Handset	Page 102 of 108


### 7.7.5 MIMO Radiated Restricted Band Edge Measurements

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS8
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

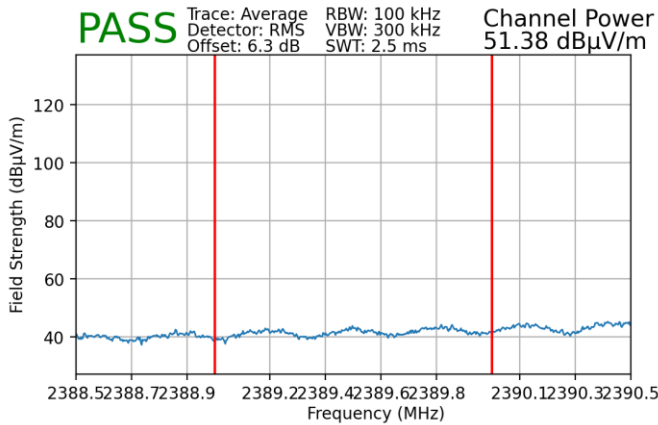


**Plot 7-136. Radiated Restricted Lower Band Edge Measurement MIMO (Average)**

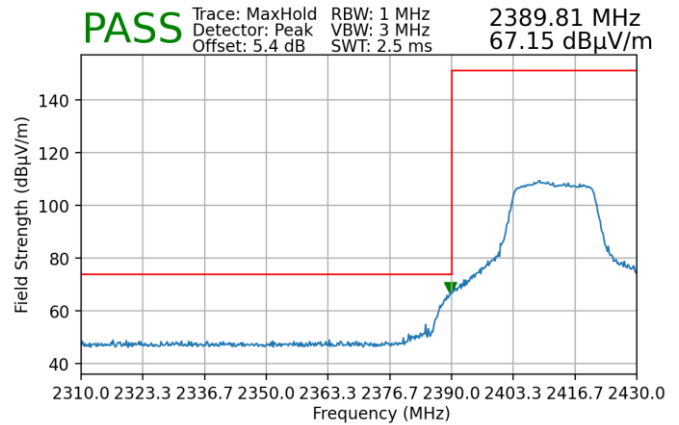


**Plot 7-137. Radiated Restricted Lower Band Edge Measurement MIMO (Peak)**

Worst Case Mode:	802.11g
Worst Case Transfer Rate:	6 Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

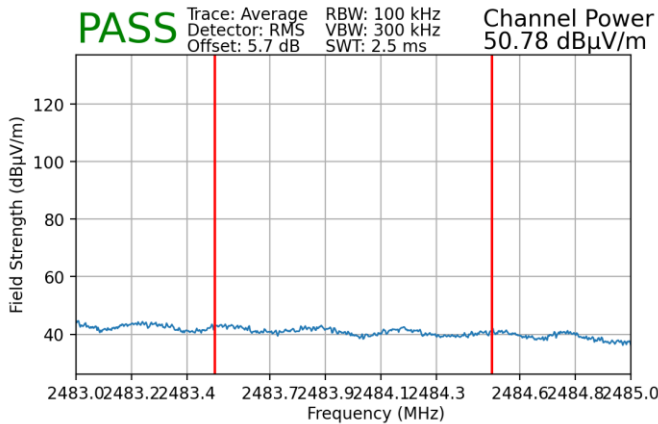

**Plot 7-138. Radiated Restricted Upper Band Edge Measurement MIMO (Average)**

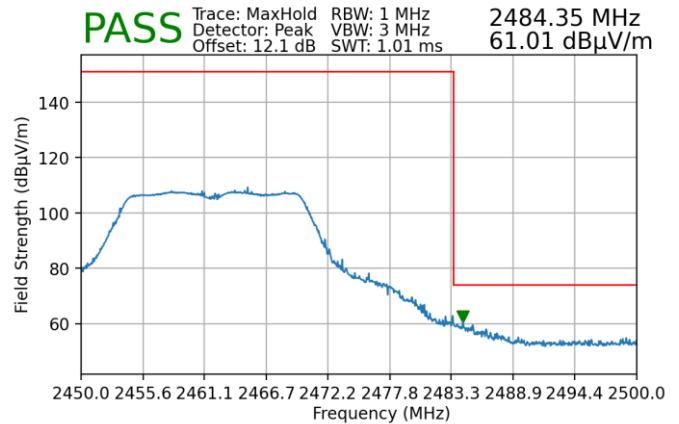


**Plot 7-139. Radiated Restricted Upper Band Edge Measurement MIMO (Peak)**


FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-15.A3L	Test Dates: 5/24-7/31/2023	EUT Type: Portable Handset	Page 103 of 108



Worst Case Mode: 802.11g  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462 MHz  
 Channel: 11

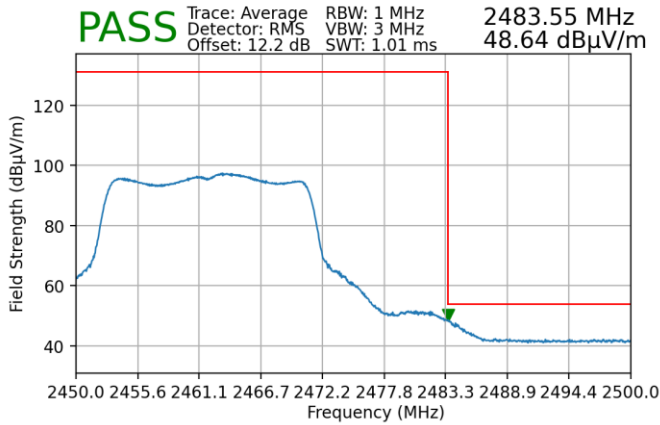

**Plot 7-140. Radiated Restricted Band Edge Measurement MIMO with WCP (Average)**

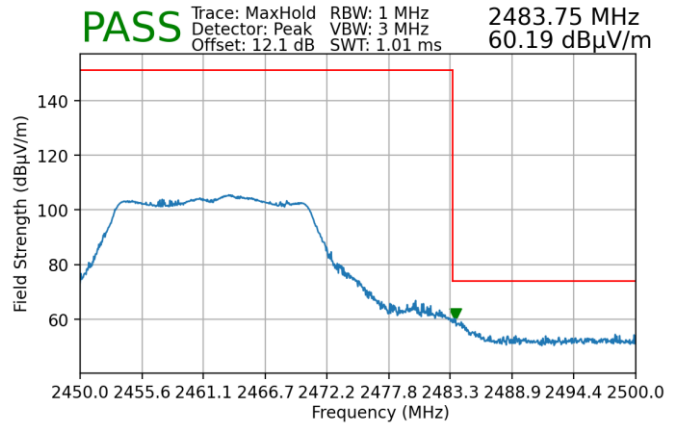

**Plot 7-141. Radiated Restricted Band Edge Measurement MIMO with WCP (Peak)**

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-15.A3L	Test Dates: 5/24-7/31/2023	EUT Type: Portable Handset	Page 104 of 108

## 7.8 Line-Conducted Test Data

### Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

**All conducted emissions must not exceed the limits shown in the table below per §15.207 and RSS-Gen (8.8).**

Frequency of emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

**Table 7-24. Conducted Limits**

\*Decreases with the logarithm of the frequency.

### Test Procedures Used

ANSI C63.10-2013, Section 6.2

### Test Settings

#### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

#### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-15.A3L	Test Dates: 5/24-7/31/2023	EUT Type: Portable Handset	Page 105 of 108

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


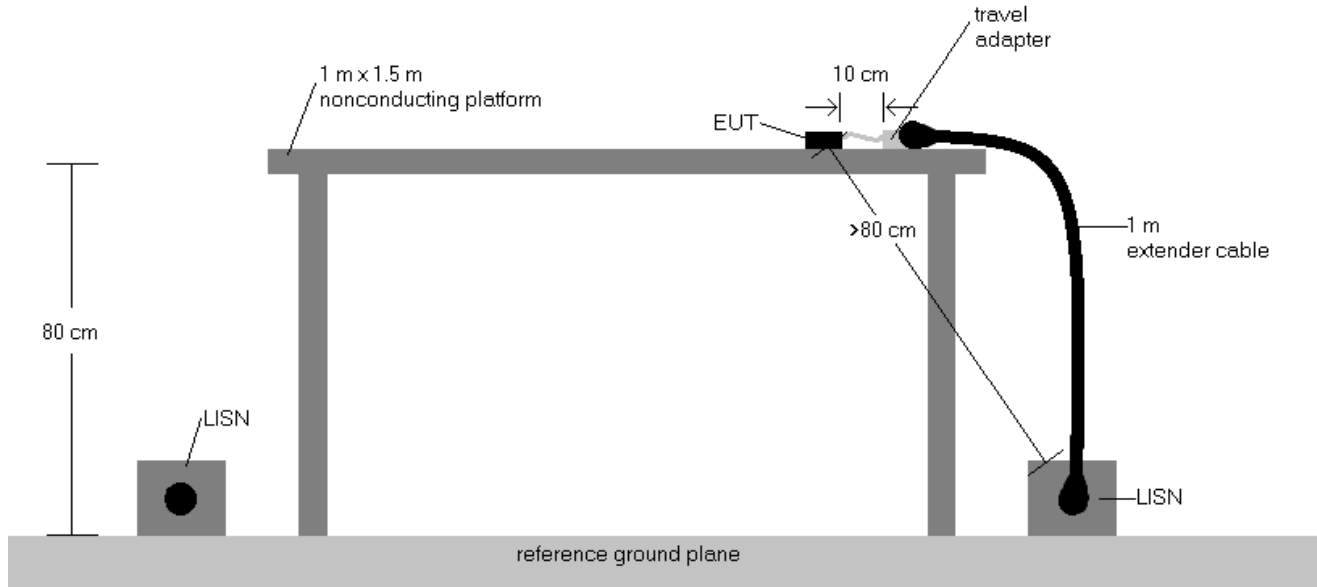


Figure 7-9. Test Instrument & Measurement Setup


### Test Notes

- All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
- The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen(8.8).
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP\AV Level (dB $\mu$ V) = QP\AV Analyzer\Receiver Level (dB $\mu$ V) + Corr. (dB)
- Margin (dB) = QP\AV Limit (dB $\mu$ V) - QP\AV Level (dB $\mu$ V)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-15.A3L	Test Dates: 5/24-7/31/2023	EUT Type: Portable Handset	Page 106 of 108

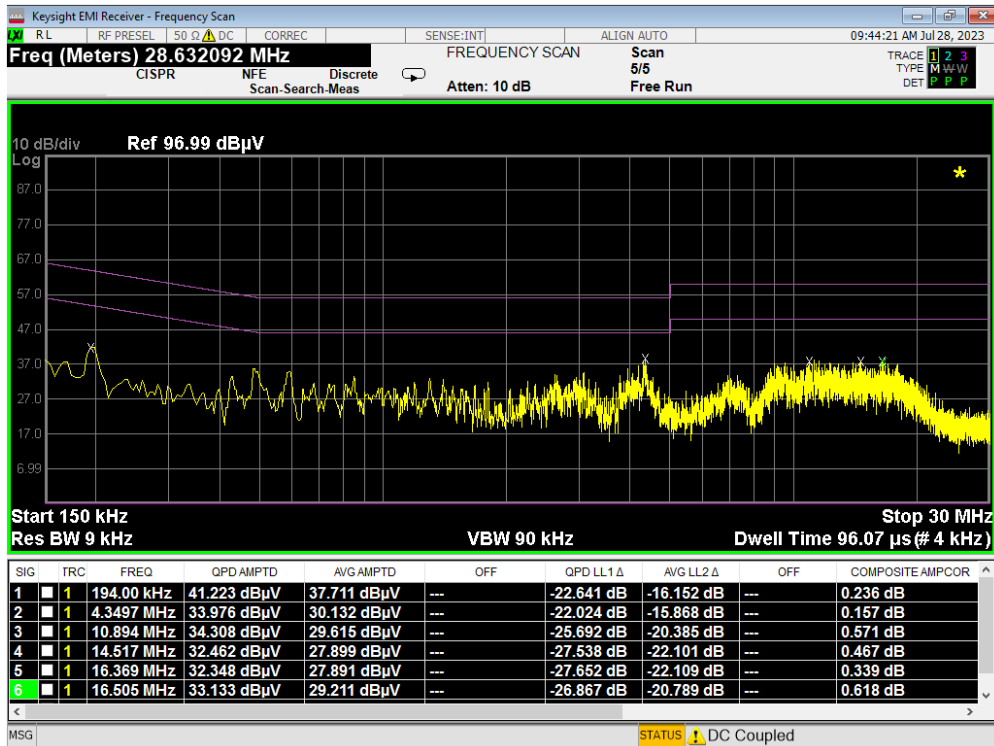

Plot 7-142. Line Conducted Plot with 802.11b (L1)

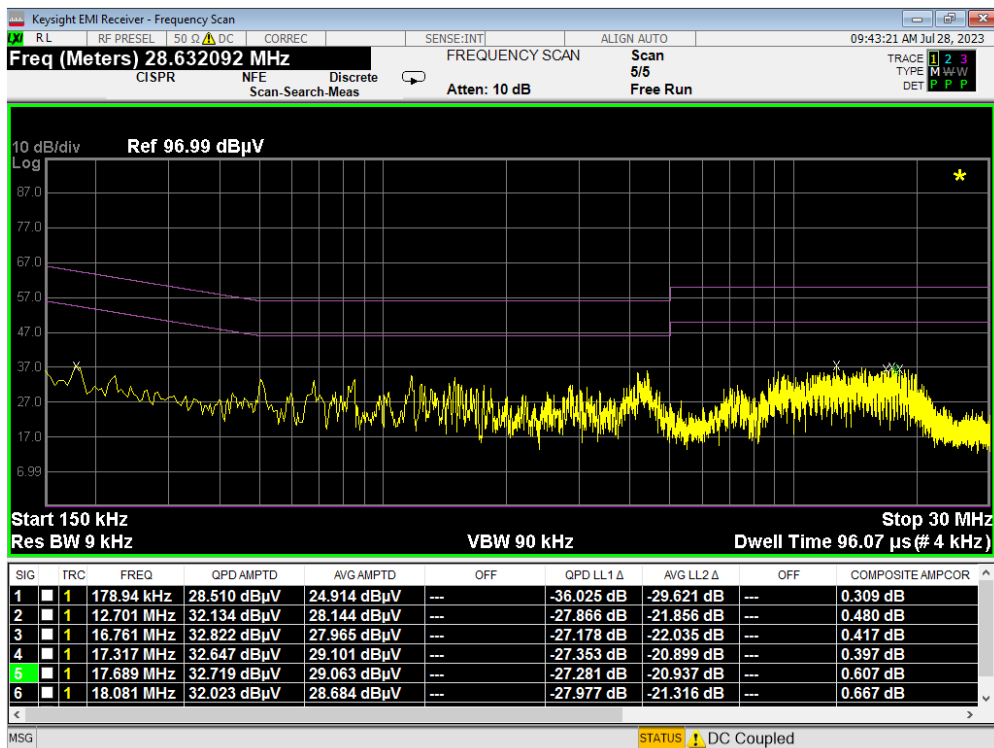

Plot 7-143. Line Conducted Plot with 802.11b (N)

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-15.A3L	Test Dates: 5/24-7/31/2023	EUT Type: Portable Handset	Page 107 of 108

## 8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMS711U** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules.

FCC ID: A3LSMS711U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2304260060-15.A3L	Test Dates: 5/24-7/31/2023	EUT Type: Portable Handset	Page 108 of 108