

FCC BT LE REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Address:
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Date of Issue:
November 05, 2021

Test Site/Location:
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA

Report No.: HCT-RF-2110-FC025-R1

FCC ID:	A3LSMS901B
APPLICANT:	SAMSUNG Electronics Co., Ltd.

Model: SM-S901B/DS
EUT Type: Mobile Phone
Average Output Power: Normal : 6.77 dBm (4.75 mW)
High Power : 14.19 dBm (26.24 mW)
Frequency Range: 2 402 MHz ~ 2 480 MHz
Modulation type GFSK
FCC Classification: Digital Transmission System(DTS)
FCC Rule Part(s): Part 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

Report No.: HCT-RF-2110-FC025-R1

REVIEWED BY



Report prepared by : Jeong Ho Kim
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2110-FC025	October 28, 2021	- First Approval Report
HCT-RF-2110-FC025-R1	November 05, 2021	- Additional Model delete

Table of Contents

REVIEWED BY	2
1. EUT DESCRIPTION	5
ANTENNA CONFIGURATIONS BT(LE).....	6
2. TEST METHODOLOGY	6
EUT CONFIGURATION	6
EUT EXERCISE	6
GENERAL TEST PROCEDURES	6
DESCRIPTION OF TEST MODES	7
3. INSTRUMENT CALIBRATION.....	7
4. FACILITIES AND ACCREDITATIONS	7
FACILITIES	7
EQUIPMENT	7
5. ANTENNA REQUIREMENTS	8
6. MEASUREMENT UNCERTAINTY	8
7. DESCRIPTION OF TESTS.....	9
8. SUMMARY TEST OF RESULTS	24
9. TEST RESULT	25
9.1 DUTY CYCLE.....	25
9.2 6 dB BANDWIDTH	32
9.3 OUTPUT POWER	41
9.4 POWER SPECTRAL DENSITY	45
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS.....	48
9.6 RADIATED SPURIOUS EMISSIONS	65
9.7 RADIATED RESTRICTED BAND EDGES	78
9.8 POWERLINE CONDUCTED EMISSIONS	86
10. LIST OF TEST EQUIPMENT	90
11. ANNEX A_ TEST SETUP PHOTO	92

1. EUT DESCRIPTION

Model	SM-S901B/DS	
Additional Model	-	
EUT Type	Mobile Phone	
Power Supply	DC 3.88 V	
Frequency Range	2 402 MHz ~ 2 480 MHz	
Max. RF Output Power (Normal)	Peak (For information only)	125k Bit/s : 6.933 dBm (4.94 mW) 500k Bit/s : 6.932 dBm (4.93 mW) 1M Bit/s : 6.969 dBm (4.98 mW) 2M Bit/s : 7.219 dBm (5.27 mW)
	Average	125k Bit/s : 6.75 dBm (4.73 mW) 500k Bit/s : 6.73 dBm (4.71 mW) 1M Bit/s : 6.77 dBm (4.75 mW) 2M Bit/s : 6.76 dBm (4.75 mW)
Max. RF Output Power (High Power)	Peak (For information only)	1M Bit/s : 14.027 dBm (25.28 mW) 2M Bit/s : 14.698 dBm (29.50 mW)
	Average	1M Bit/s : 13.75 dBm (23.69 mW) 2M Bit/s : 14.19 dBm (26.24 mW)
Modulation Type	GFSK	
Bluetooth Version	5.2	
Number of Channels	40 Channels	
Date(s) of Tests	September 24, 2021 ~ October 28, 2021	
Serial number	Radiated: R3CR90EYFYM Conducted (High Power) : R3CR90EYJRZ Conducted (Normal) : R3CR90EYJRZ	

ANTENNA CONFIGURATIONS BT(LE)

1. The device employs MIMO technology. Below are the possible configurations

Configurations	SISO	
	Ant1(core-0)	Ant2(Core-1)
Bluetooth Low Energy	O	X

Note:

- 1. O = Support, X = Not Support
- 2. SISO = Single Input Single Output

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil,

Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of §15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05 (Confidence level about 95 %, $k=2$)

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

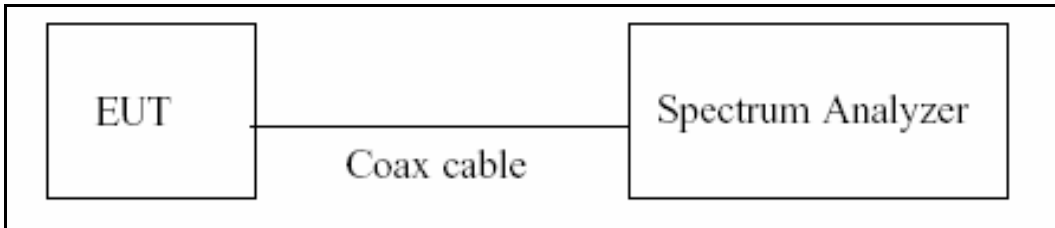

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method, 6.0)b) in KDB 558074 v05r02.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

7.2. 6 dB Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to

(Procedure 8.2 in KDB 558074 v05r02, Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration



Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
: Measure the peak power of the transmitter.

- Average Power (Procedure 8.3.2.3 in KDB 558074 v05r02, Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Measured Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Measured Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3 kHz BW.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- 4) $VBW \geq 3 \times RBW$.
- 5) Sweep = auto couple
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / RBW]$.
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.
If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11) if then duty factor shall be added to adjust the result if the duty cycle is less than 98 %

Sample Calculation

- Power Spectral Density = Measured Value + ATT loss + Cable loss


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 30 dBc]

Test Configuration



Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 8.5 in KDB 558074 v05r02, Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points $\geq 2 \times$ Span/VBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	20.04
100	20.09
200	20.13
300	20.19
400	20.22
500	20.23
600	20.23
700	20.25
800	20.27
900	20.29
1000	20.31
2000	20.46
2400	20.52
2480	20.52
2500	20.52
3000	20.57
4000	20.67
5000	20.75
5150	20.77
5850	20.82
6000	20.82
7000	20.91
8000	20.98
9000	21.05
10 000	21.12
11 000	21.16
12 000	21.24
13 000	21.32
14 000	21.30
15 000	21.32
16 000	21.37
17 000	21.41
18 000	21.47
19 000	21.50
20 000	21.56
21 000	21.77
22 000	21.74
23 000	21.94
24 000	21.77

Note : 1. 2 400 ~ 2 500 MHz is fundamental frequency range.

2. Factor = Attenuator loss(20 dB) + Cable loss(1ea)


7.6. Radiated Test

Limit


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

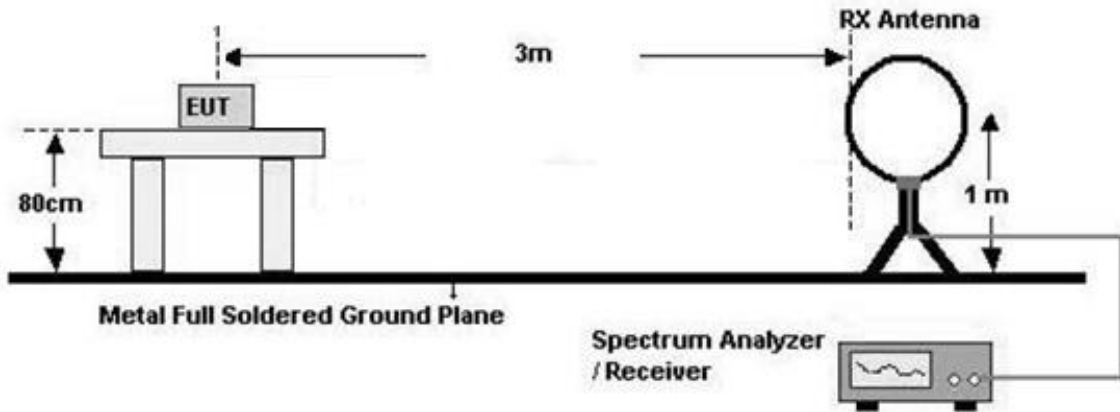

30 MHz - 1 GHz

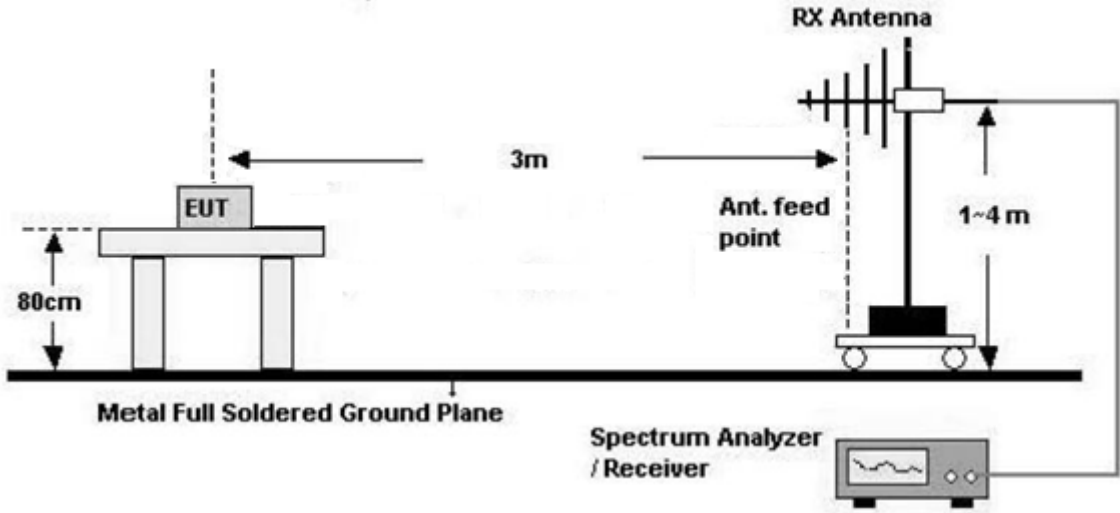

Above 1 GHz

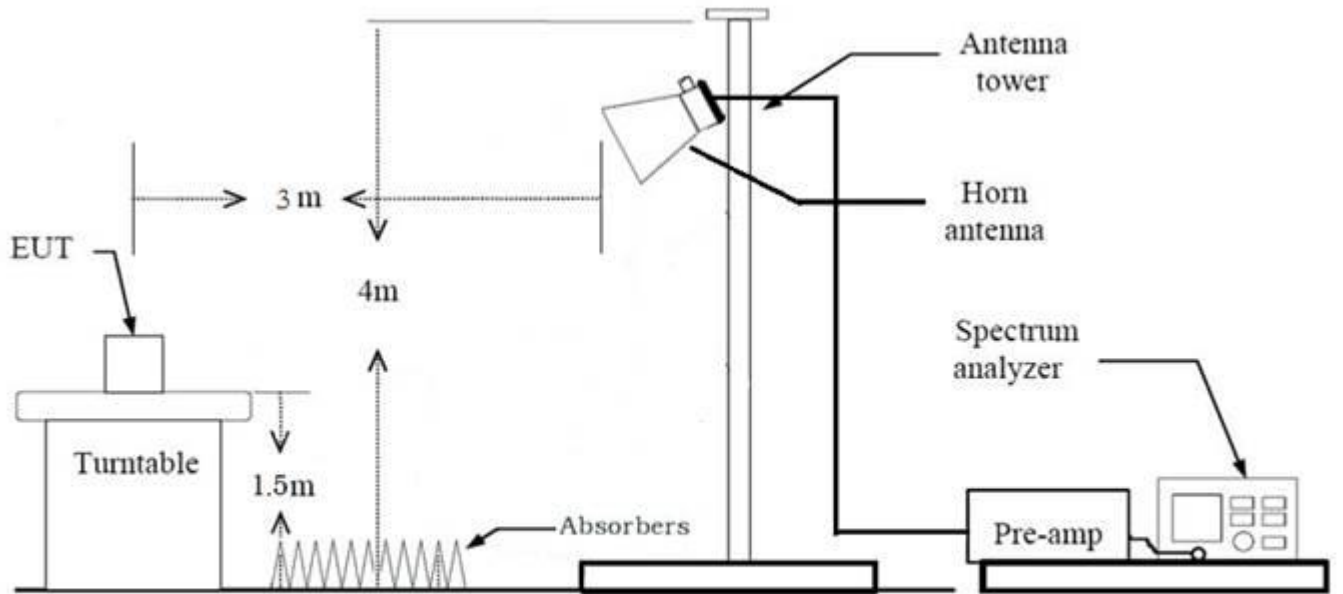

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = - 80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = - 40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.
OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW \geq 3 x RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

In general, (1) is used mainly

7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Max hold
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Average):
 - Duty cycle < 98 %, duty cycle variations are less than ± 2 %
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Distance extrapolation factor = $20\log$ (test distance / specific distance) (dB)
11. Total (Measurement Type : Peak)
 - = Peak Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G)
 - + Distance Factor(D.F)

Total (Measurement Type : Average)

= Average Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G)
+ Distance Factor(D.F) + Duty Cycle Factor

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
 - Detector = Peak
 - Trace = Max hold
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Average):
 - Duty cycle < 98 %, duty cycle variations are less than ± 2 %
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
 - Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

11. Total(Measurement Type : Peak)

= Peak Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average)

= Average Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

+ Duty Cycle Factor

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

7.8. Worst case configuration and mode

Radiated Test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
 - Worstcase : Stand alone
2. EUT Axis:
 - Radiated Spurious Emissions : Z
 - Radiated Restricted Band Edge : Z
3. All packet length of operation were investigated and the test results are worst case in lowest packet length.
(Worst case :1M Bit/s 37 Byte, 2M Bit/s 37 Byte)
(125k, 500k, 1M Bit/s all have the same 1MHz Band width and only Worst result is attached.)
4. All datarate of operation were investigated and the worst case configuration results are reported.
 - Worst case : 1 M, 2 M (Normal & high Power)
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + External accessories(Earphone, etc)+Travel Adapter, Stand alone + Travel Adapter
 - Worstcase : Stand alone + Travel Adapter

Conducted test

1. The EUT was configured with packet length of highest power.
 - ALL supported mode tested.
 - Worst Results Notes for each test item

8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

9. TEST RESULT

9.1 DUTY CYCLE

[Normal]


Data rate (Bit/s)	Packet length (Byte)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
125k	37	3.100	3.747	0.8274	0.82
	255	17.067	17.500	0.9752	0.11
500k	37	1.067	1.877	0.5684	2.45
	255	4.560	5.000	0.9120	0.40
1M	37	0.389	0.624	0.6227	2.06
	255	2.130	2.500	0.8520	0.70
2M	37	0.205	0.624	0.3286	4.83
	255	1.080	1.876	0.5757	2.40

[High Power]

Data rate (Bit/s)	Packet length (Byte)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
1M	37	0.389	0.626	0.6215	2.07
	255	2.135	2.500	0.8540	0.69
2M	37	0.204	0.624	0.3266	4.86
	255	1.076	1.876	0.5736	2.41


125k Bit/s(37 Byte) Test Plots

Duty Cycle (Low-CH 0)

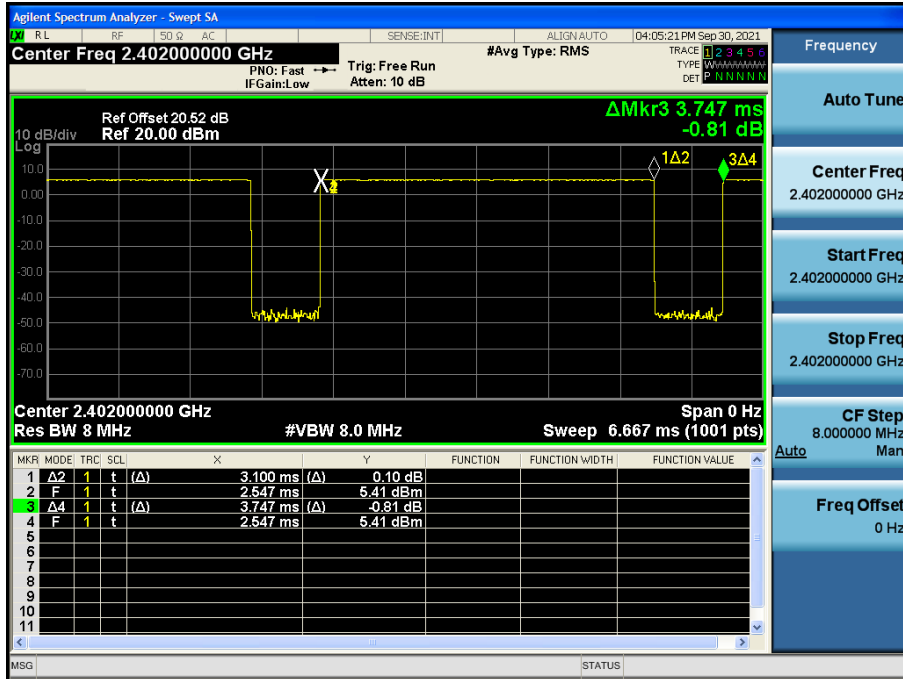


125k Bit/s(255 Byte) Test Plots

Duty Cycle (Low-CH 0)

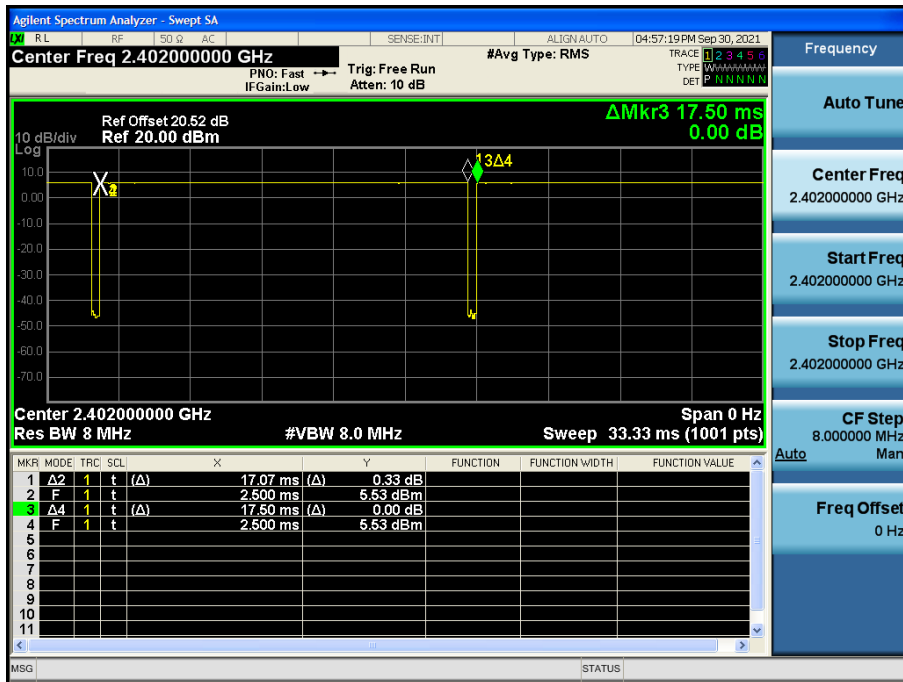


500k Bit/s(37 Byte) Test Plots

Duty Cycle (Low-CH 0)

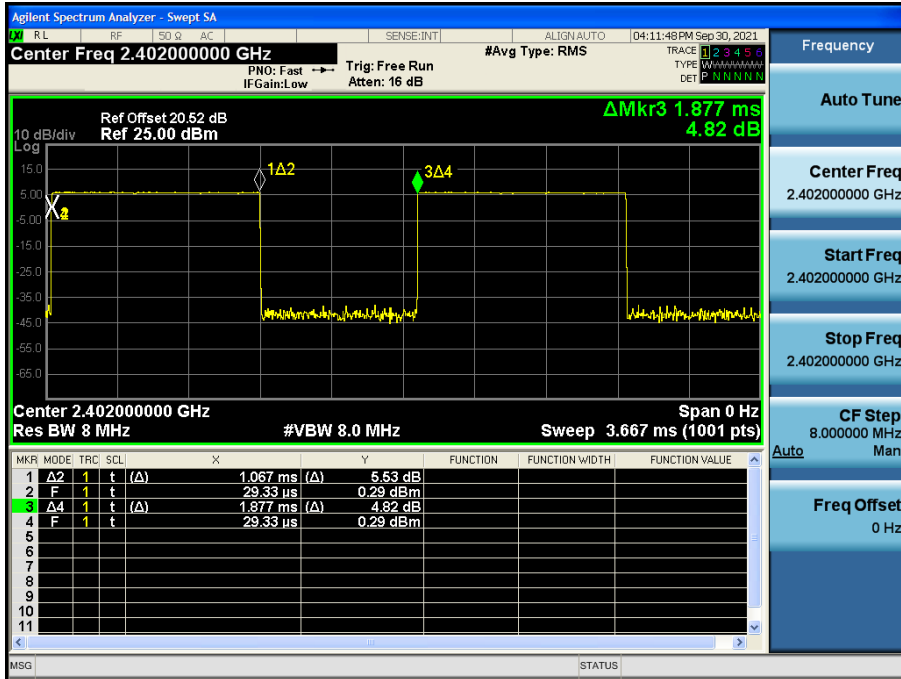


500k Bit/s(255 Byte) Test Plots

Duty Cycle (Low-CH 0)

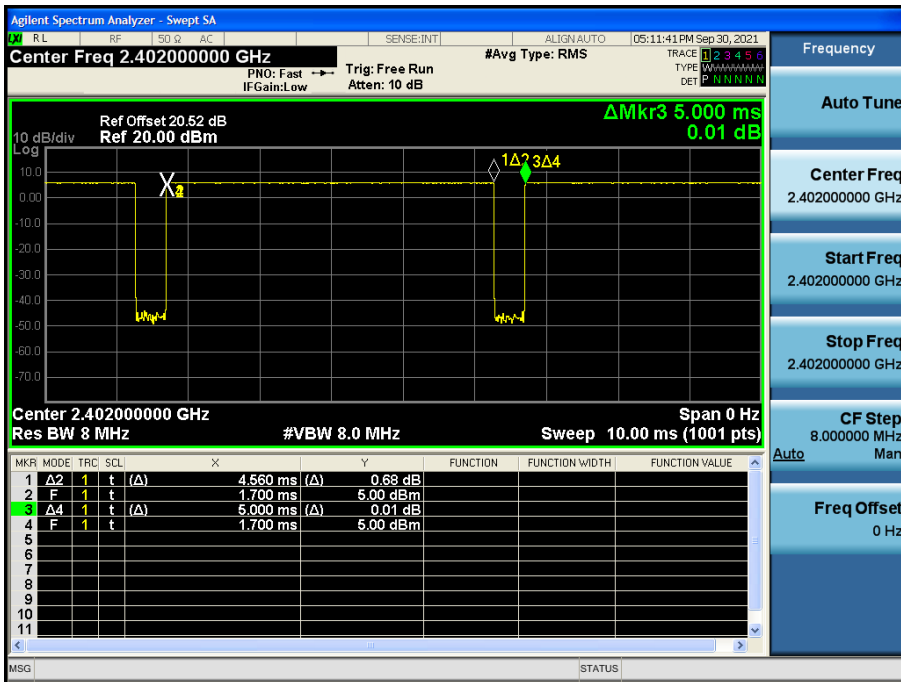


1M Bit/s (37 Byte) Test Plots

Duty Cycle (Low-CH 0)

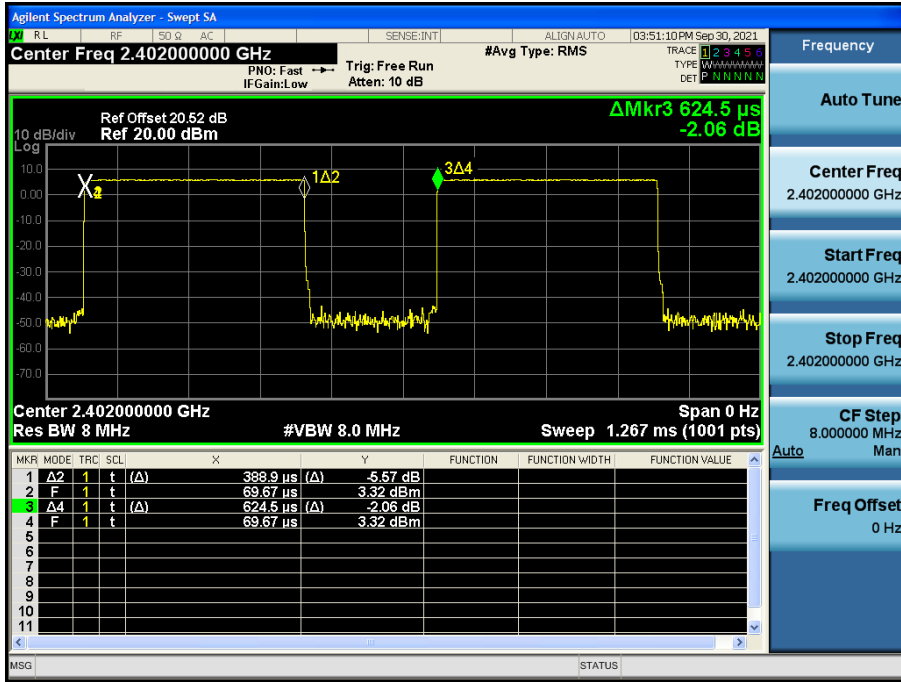


1M Bit/s (255 Byte) Test Plots

Duty Cycle (Low-CH 0)

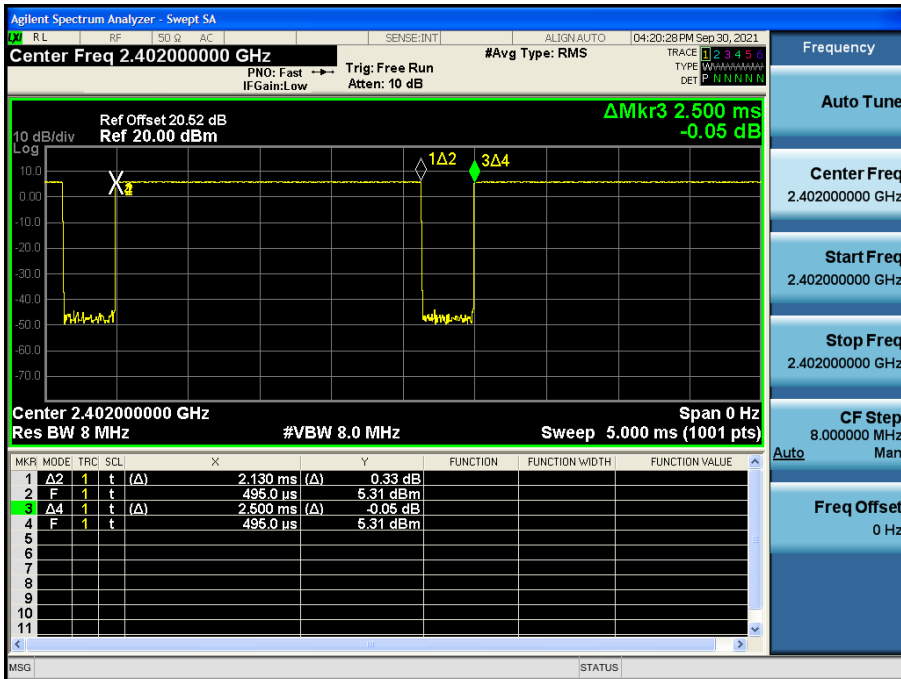


2M Bit/s (37 Byte) Test Plots

Duty Cycle (Low-CH 0)

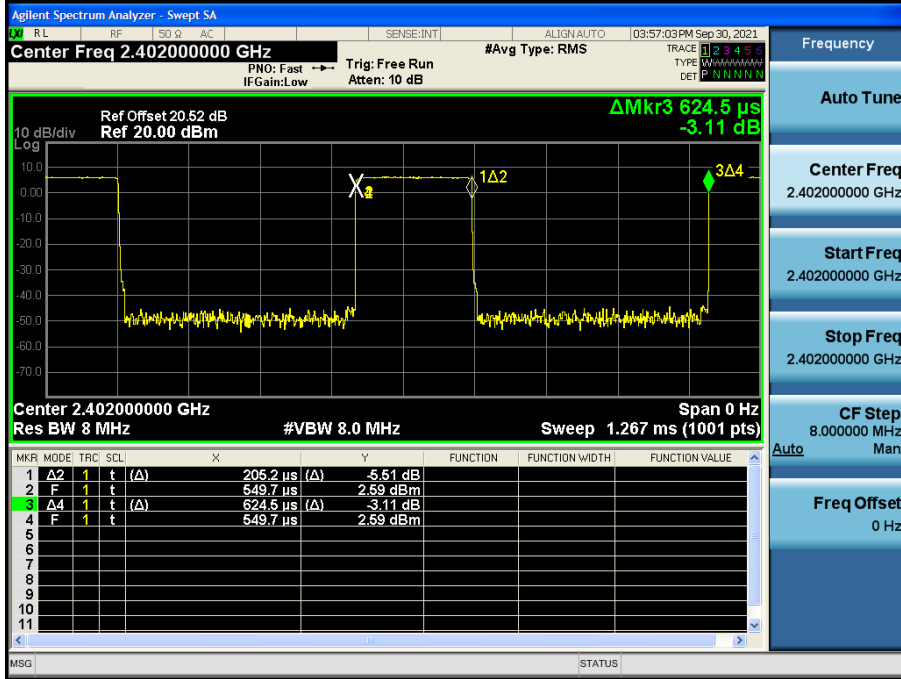

2M Bit/s (255 Byte) Test Plots


Duty Cycle (Low-CH 0)

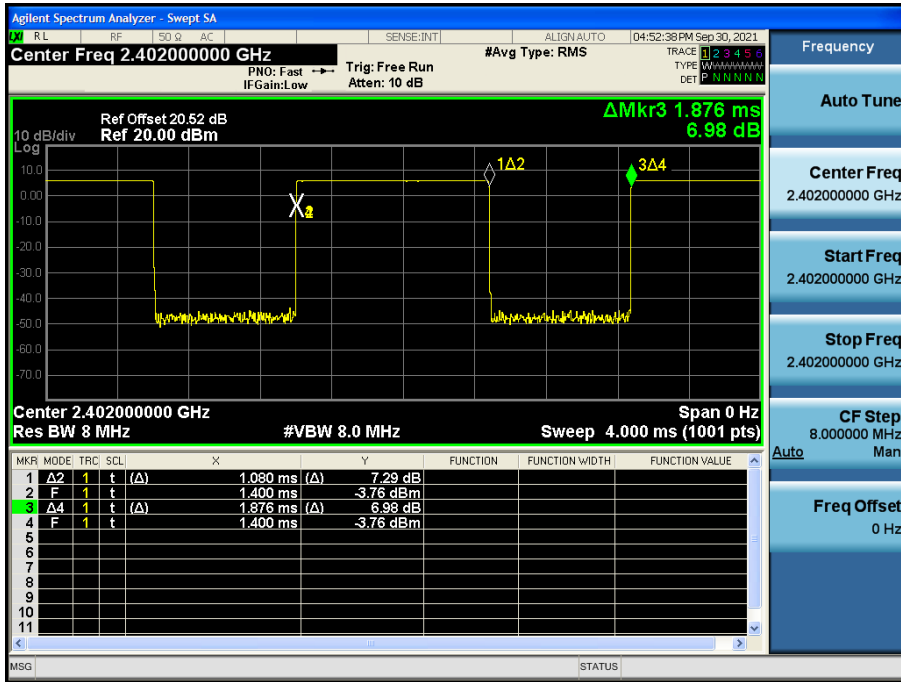

High Power


1M Bit/s (37 Byte) Test Plots

Duty Cycle (Low-CH 0)

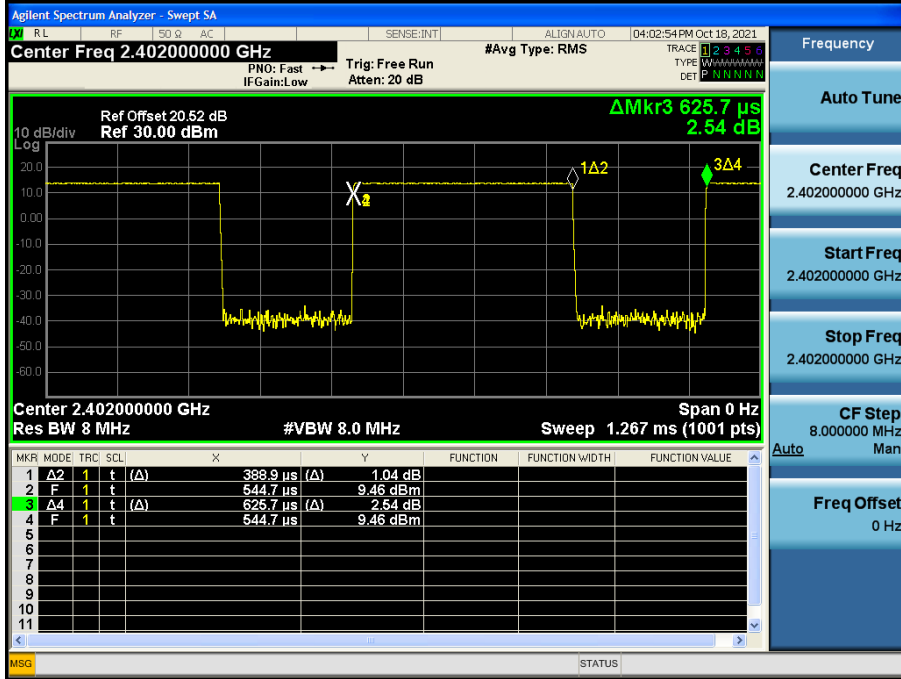


1M Bit/s (255 Byte) Test Plots

Duty Cycle (Low-CH 0)

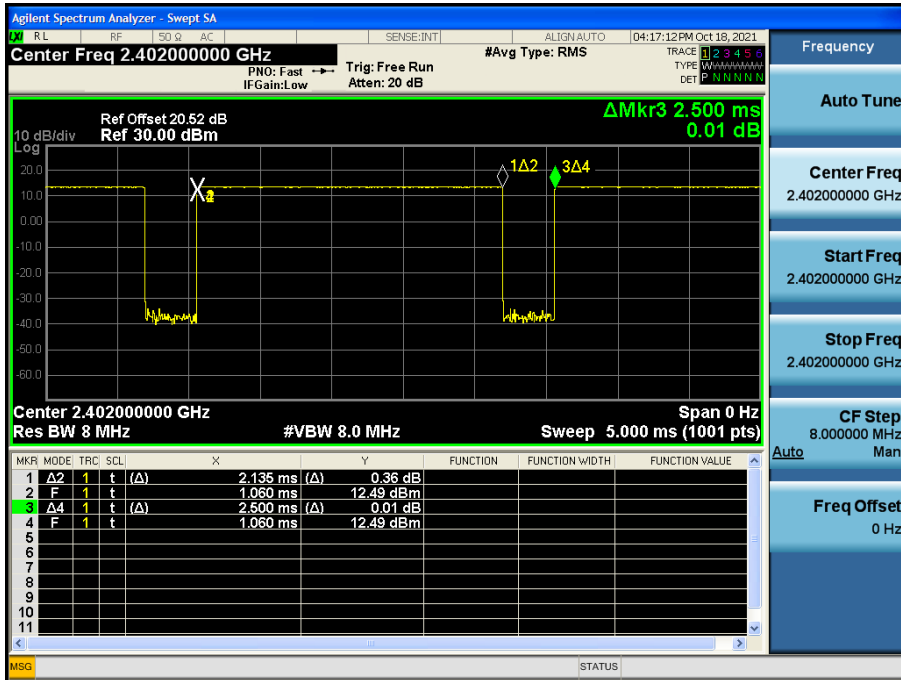


2M Bit/s (37 Byte) Test Plots

Duty Cycle (Low-CH 0)

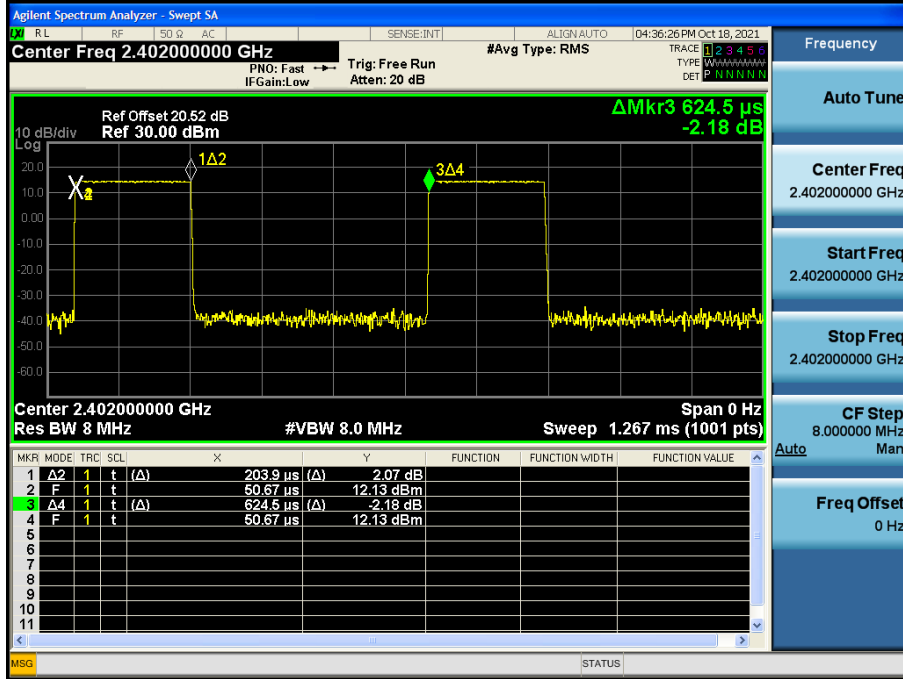

2M Bit/s (255 Byte) Test Plots

Duty Cycle (Low-CH 0)

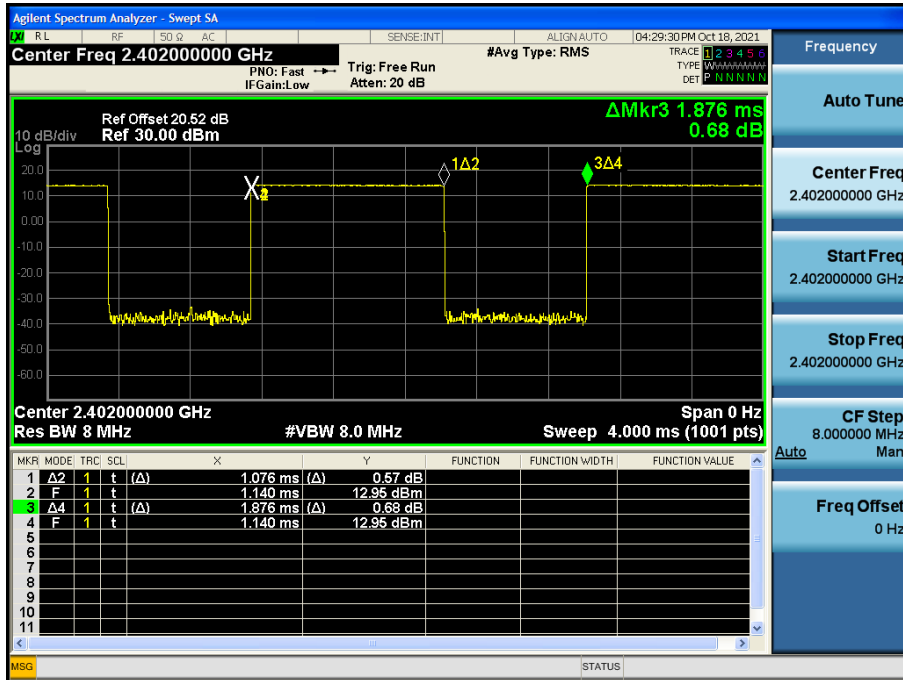

9.2 6 dB BANDWIDTH

Mode (Bit/s)	Channel	6 dB Bandwidth (kHz)	Limit (kHz)
125k(37)	0	633.4	> 500
	19	631.3	
	39	628.9	
125k(255)	0	634.4	> 500
	19	635.3	
	39	640.0	
500k(37)	0	668.9	> 500
	19	664.0	
	39	663.7	
500k(255)	0	676.9	> 500
	19	664.1	
	39	664.7	
1M(37)	0	682.2	> 500
	19	676.0	
	39	671.0	
1M(255)	0	666.4	> 500
	19	664.6	
	39	666.5	
2M(37)	0	1164	> 500
	19	1152	
	39	1154	
2M(255)	0	1148	> 500
	19	1163	
	39	1159	
1M(37) High Power	0	668.7	> 500
	19	670.6	
	39	669.8	
1M(255) High Power	0	664.4	> 500
	19	667.3	
	39	664.3	
2M(37) High Power	0	1131	> 500
	19	1135	
	39	1137	
2M(255) High Power	0	1146	> 500
	19	1152	
	39	1155	


Note:

Worst case test Plot Only 125k, 500k **Bit/s**: 37 Byte,


1M **Bit/s(High Power)**: 255 Byte, 2M **Bit/s(High Power)**: 37 Byte

125k Bit/s(37 Byte) Test Plots


6 dB Bandwidth plot (Low-CH 0)

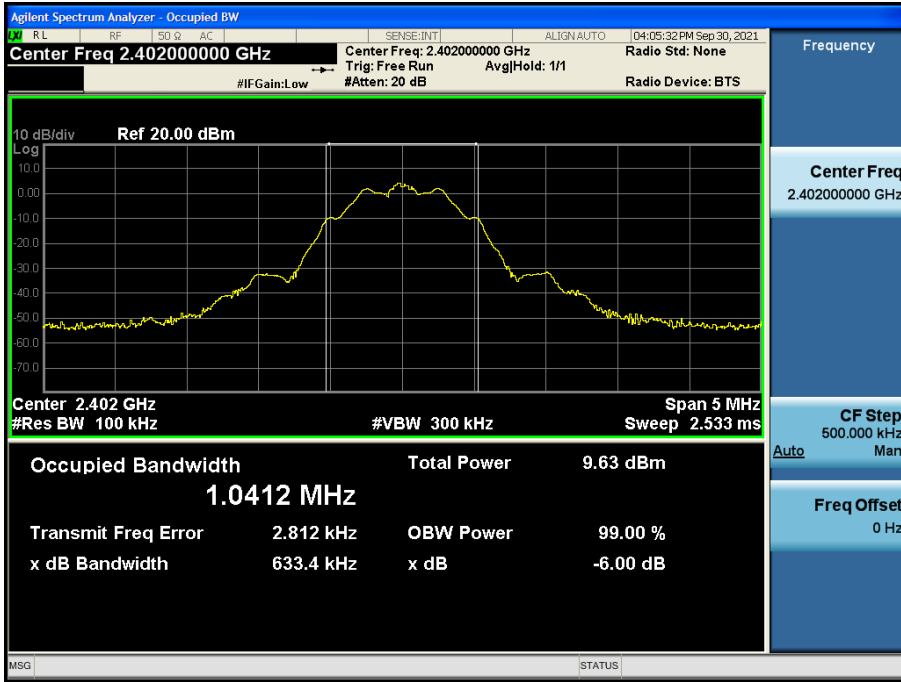

6 dB Bandwidth plot (Mid-CH 19)

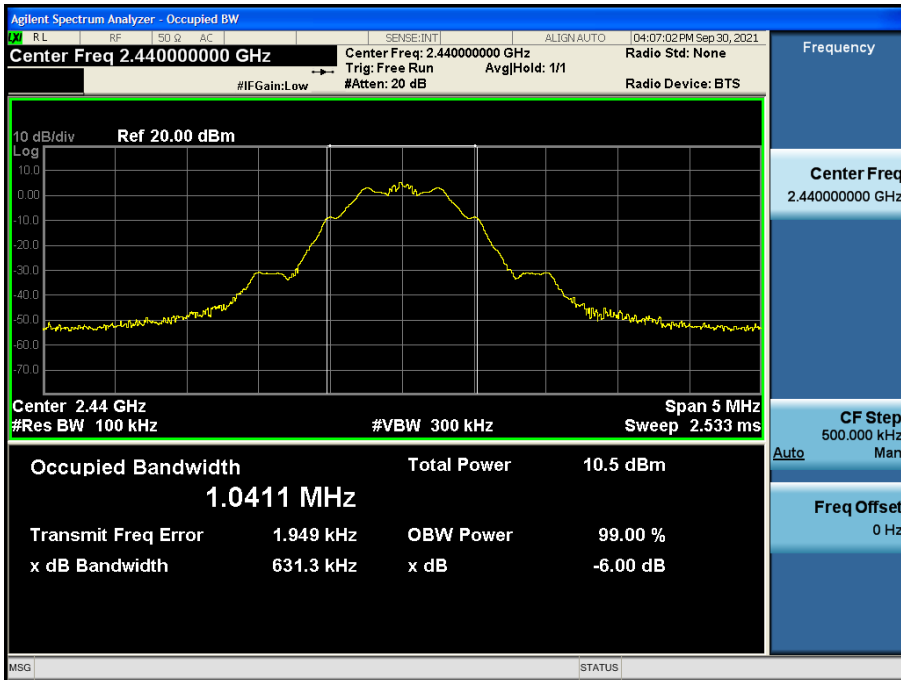


6 dB Bandwidth plot (High-CH 39)

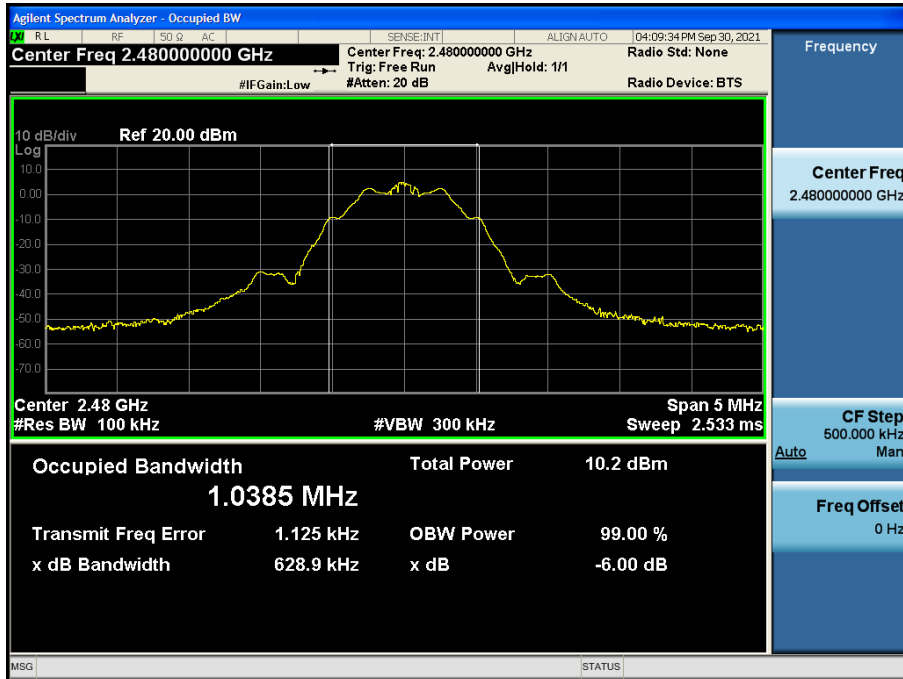


500k Bit/s(37 Byte) Test Plots


6 dB Bandwidth plot (Low-CH 0)

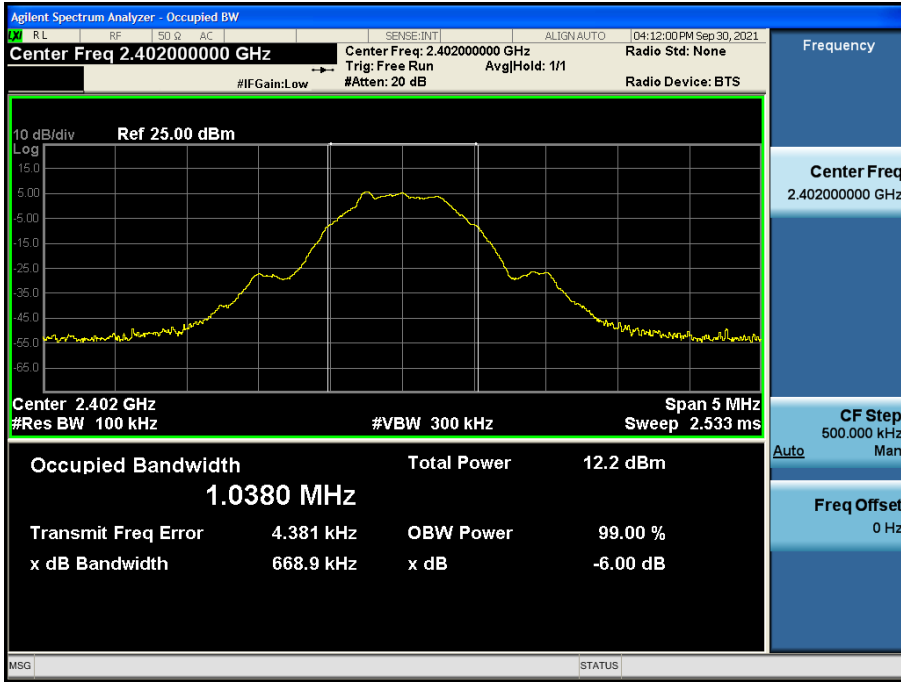

6 dB Bandwidth plot (Mid-CH 19)

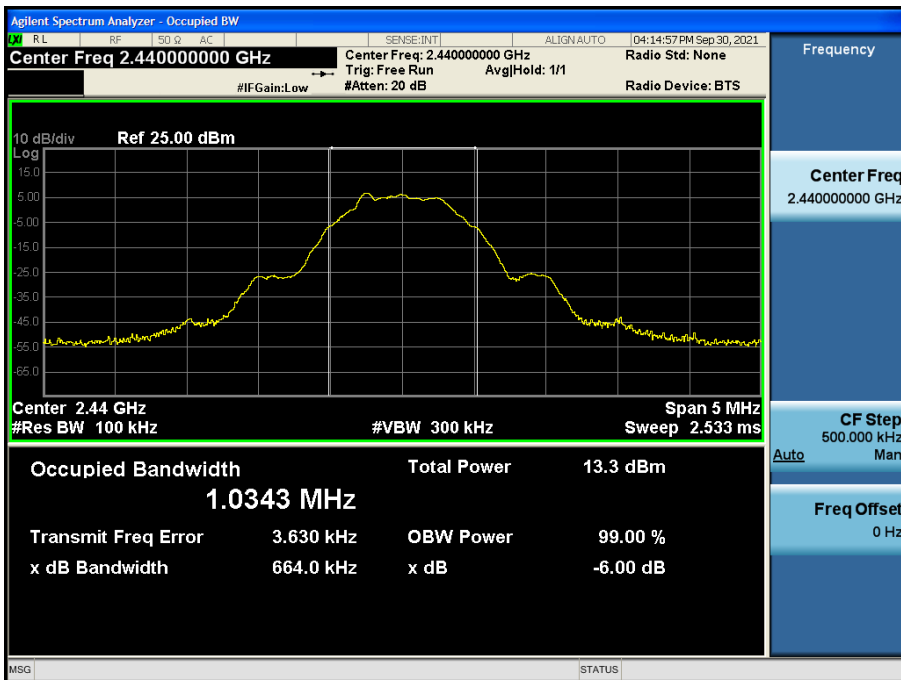


6 dB Bandwidth plot (High-CH 39)

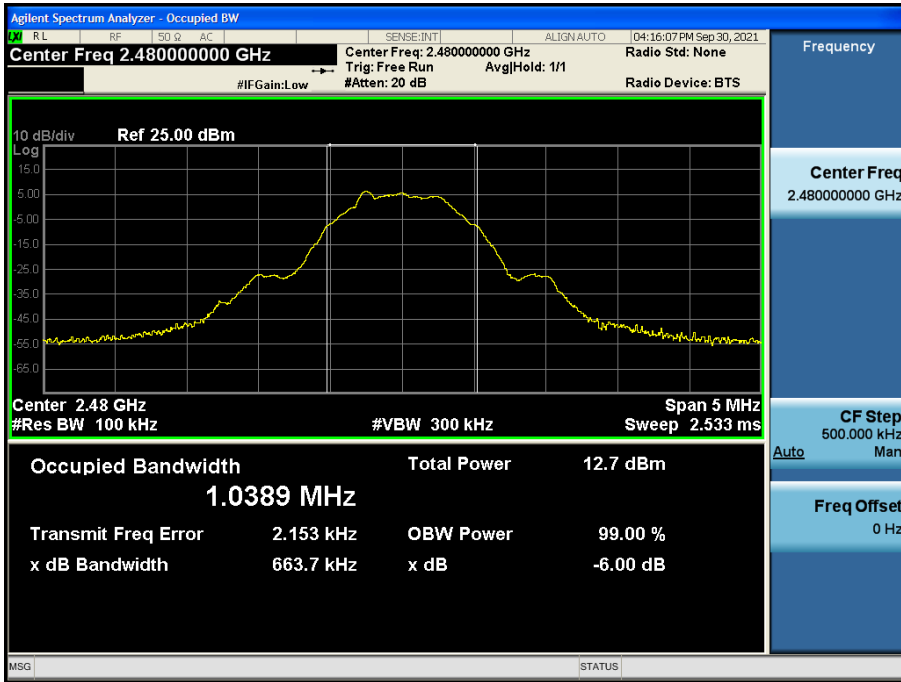


1 MBit/s (255 Byte) Test Plots_High Power


6 dB Bandwidth plot (Low-CH 0)

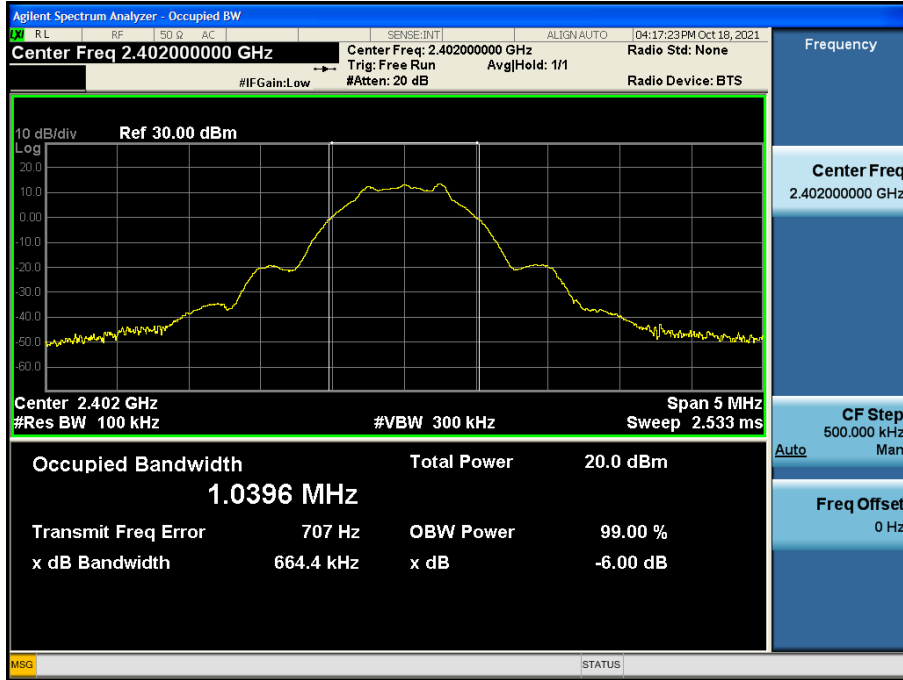

6 dB Bandwidth plot (Mid-CH 19)

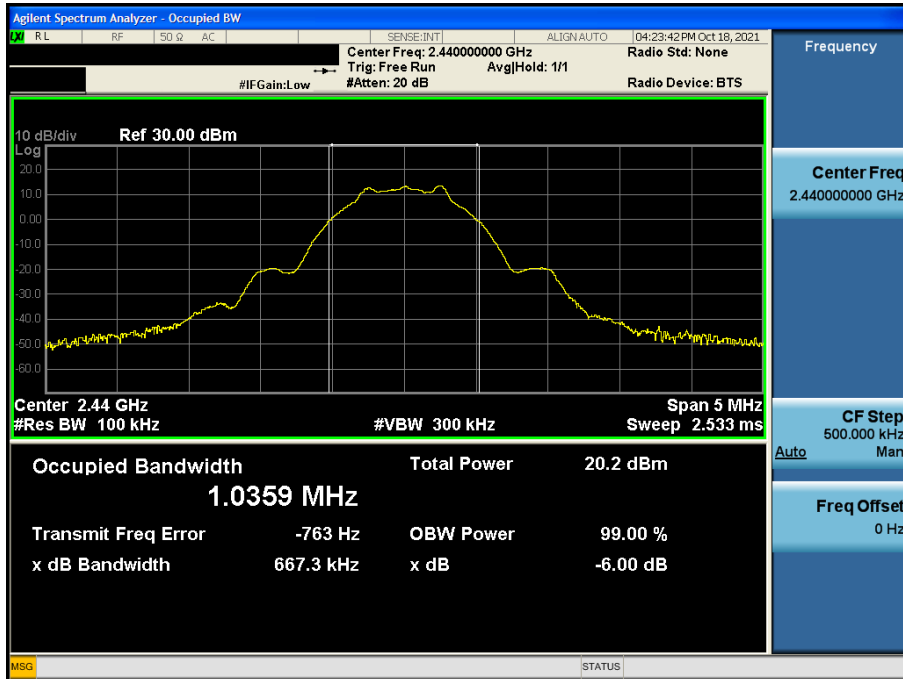


6 dB Bandwidth plot (High-CH 39)

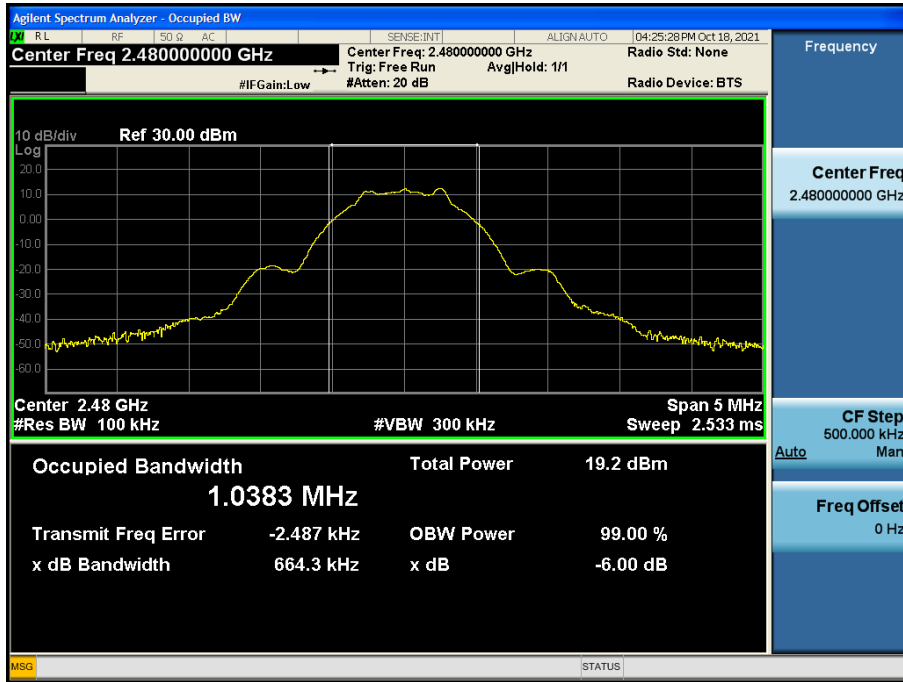


▣ 2 MBit/s (37 Byte) Test Plots_High Power


6 dB Bandwidth plot (Low-CH 0)

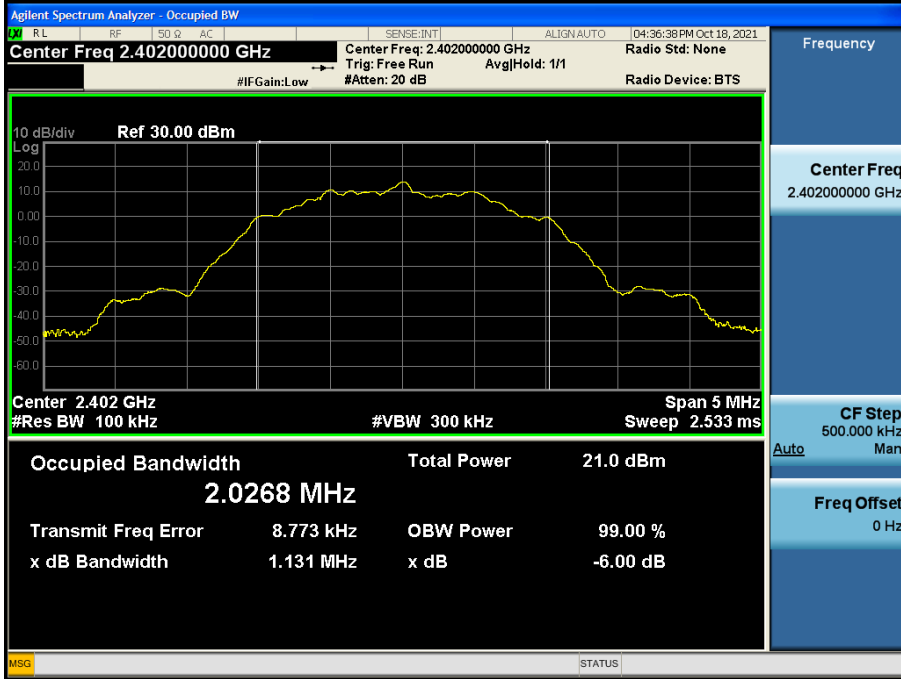

6 dB Bandwidth plot (Mid-CH 19)

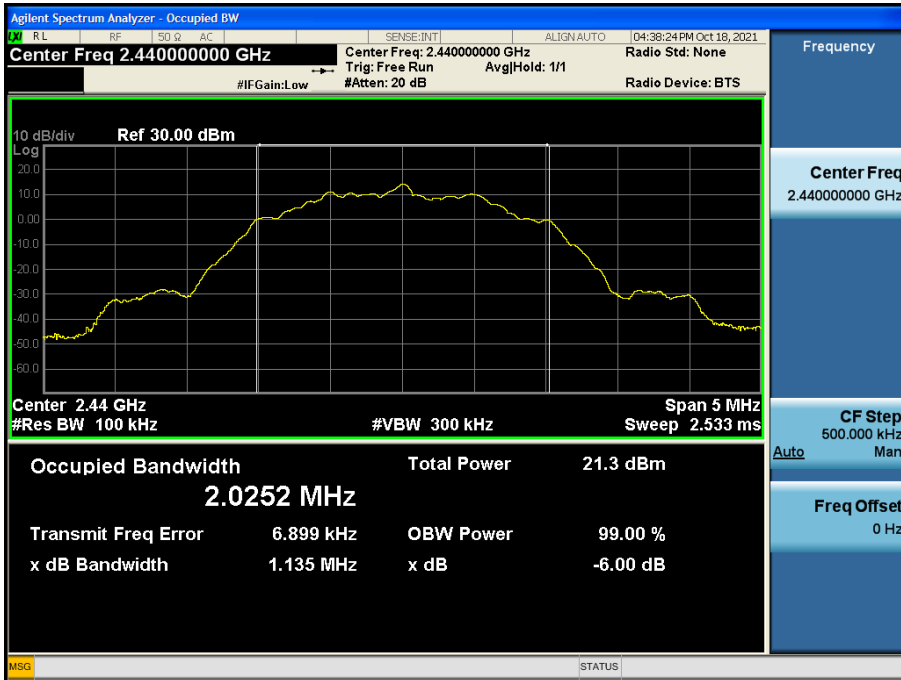

6 dB Bandwidth plot (High-CH 39)

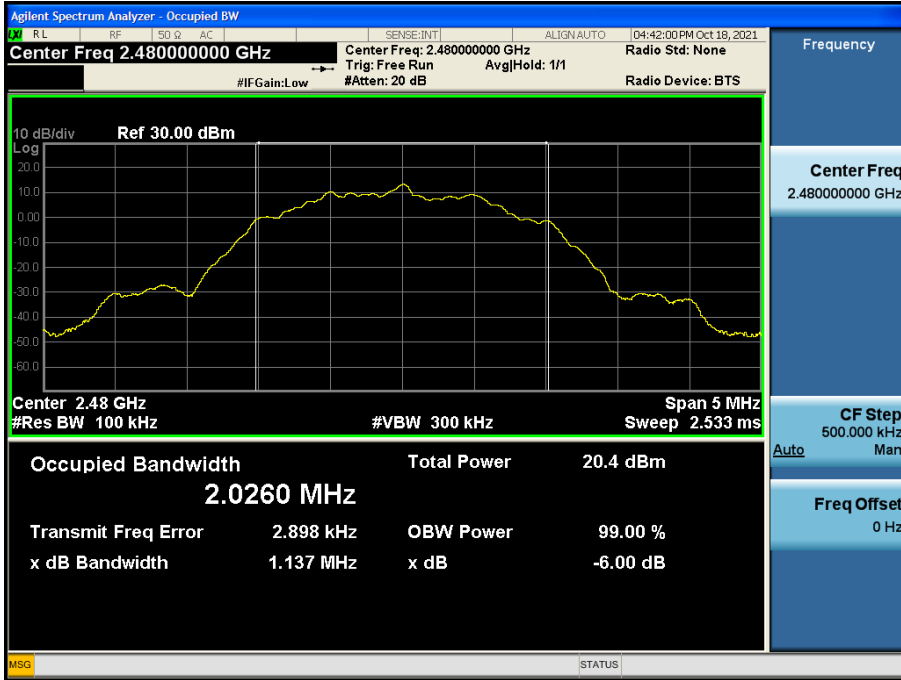

9.3 OUTPUT POWER

Peak Power(Normal)

Data rate (Bit/s)	Packet length (Byte)	LE Mode		Measured Power(dBm)	Limit (dBm)
		Frequency [MHz]	Channel		
125k	37	2402	0	5.940	30
		2440	19	6.933	
		2480	39	6.383	
	255	2402	0	5.883	
		2440	19	6.857	
		2480	39	6.292	
500k	37	2402	0	5.935	
		2440	19	6.932	
		2480	39	6.388	
	255	2402	0	5.861	
		2440	19	6.852	
		2480	39	6.311	
1M	37	2402	0	5.934	
		2440	19	6.969	
		2480	39	6.419	
	255	2402	0	5.843	
		2440	19	6.866	
		2480	39	6.323	
2M	37	2402	0	6.076	
		2440	19	7.219	
		2480	39	6.681	
	255	2402	0	6.014	
		2440	19	7.094	
		2480	39	6.567	

Note :

1. Power meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 20.52 dB is offset for 2.4 GHz Band.

Peak Power(High Power)

Data rate (Bit/s)	Packet length (Byte)	LE Mode		Measured Power(dBm)	Limit (dBm)
		Frequency [MHz]	Channel		
1M	37	2402	0	13.789	30
		2440	19	14.027	
		2480	39	13.136	
	255	2402	0	13.457	
		2440	19	13.592	
		2480	39	12.581	
2M	37	2402	0	14.456	
		2440	19	14.698	
		2480	39	13.815	
	255	2402	0	14.124	
		2440	19	14.274	
		2480	39	13.305	

Note :

1. Power meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 20.52 dB is offset for 2.4 GHz Band.

Average Power(Normal)

Data rate (Bit/s)	Packet length (Byte)	LE Mode		Measured Power (dBm)	Duty Cycle Factor (dB)	Result (dBm)	Limit (dBm)
		Frequency [MHz]	Channel				
125k	37	2402	0	4.94	0.82	5.76	30
		2440	19	5.93	0.82	6.75	
		2480	39	5.35	0.82	6.17	
	255	2402	0	5.48	0.11	5.59	
		2440	19	6.56	0.11	6.67	
		2480	39	5.99	0.11	6.10	
500k	37	2402	0	3.08	2.45	5.53	
		2440	19	4.28	2.45	6.73	
		2480	39	3.76	2.45	6.21	
	255	2402	0	5.24	0.40	5.64	
		2440	19	6.24	0.40	6.64	
		2480	39	5.67	0.40	6.07	
1M	37	2402	0	3.55	2.06	5.61	
		2440	19	4.71	2.06	6.77	
		2480	39	4.17	2.06	6.23	
	255	2402	0	4.85	0.70	5.55	
		2440	19	5.93	0.70	6.63	
		2480	39	5.42	0.70	6.12	
2M	37	2402	0	0.63	4.83	5.46	
		2440	19	1.93	4.83	6.76	
		2480	39	1.37	4.83	6.20	
	255	2402	0	3.25	2.40	5.65	
		2440	19	4.23	2.40	6.63	
		2480	39	3.61	2.40	6.01	

Note :

1. Power meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 20.52 dB is offset for 2.4 GHz Band.

Average Power(High Power)

Data rate (Bit/s)	Packet length (Byte)	LE Mode		Measured Power (dBm)	Duty Cycle Factor (dB)	Result (dBm)	Limit (dBm)
		Frequency [MHz]	Channel				
1M	37	2402	0	11.45	2.07	13.52	30
		2440	19	11.68	2.07	13.75	
		2480	39	10.78	2.07	12.85	
	255	2402	0	12.49	0.69	13.18	
		2440	19	12.60	0.69	13.29	
		2480	39	11.57	0.69	12.26	
2M	37	2402	0	9.14	4.86	14.00	
		2440	19	9.33	4.86	14.19	
		2480	39	8.57	4.86	13.43	
	255	2402	0	11.19	2.41	13.60	
		2440	19	11.34	2.41	13.75	
		2480	39	10.34	2.41	12.75	

Note :

1. Power meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 20.52 dB is offset for 2.4 GHz Band.

9.4 POWER SPECTRAL DENSITY

Frequency (MHz)	Channel No.	Mode	Test Result			Limit (dBm)
			Measured Power(dBm)	Duty Cycle Factor(dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	
2402	0	125k 37 Byte	-0.963	0.82	-0.140	8 dBm / 3 kHz
2440	19		-0.083	0.82	0.740	
2480	39		-0.691	0.82	0.132	
2402	0	125k 255 Byte	-0.601	0.11	-0.492	
2440	19		0.539	0.11	0.648	
2480	39		0.016	0.11	0.125	
2402	0	500k 37 Byte	-3.444	2.45	-0.990	
2440	19		-2.918	2.45	-0.464	
2480	39		-3.149	0.40	-2.749	
2402	0	500k 255 Byte	-1.375	0.40	-0.975	
2440	19		-0.461	0.40	-0.061	
2480	39		-1.466	0.40	-1.066	
2402	0	1 MBit/s 37 Byte	-2.641	2.06	-0.584	
2440	19		-1.552	2.06	0.505	
2480	39		-1.831	2.06	0.226	
2402	0	1 MBit/s 255 Byte	-1.624	0.70	-0.928	
2440	19		-0.544	0.70	0.152	
2480	39		-0.955	0.70	-0.259	
2402	0	2 MBit/s 37 Byte	-6.735	4.83	-1.902	
2440	19		-6.102	4.83	-1.269	
2480	39		-5.755	4.83	-0.922	
2402	0	2 MBit/s 255 Byte	-5.660	2.40	-3.262	
2440	19		-4.669	2.40	-2.271	
2480	39		-4.975	2.40	-2.577	
2402	0	1 MBit/s 37 Byte High Power	-1.232	2.07	0.834	
2440	19		-1.060	2.07	1.006	
2480	39		-3.169	2.07	-1.103	
2402	0	1 MBit/s 255 Byte High Power	-2.121	0.69	-1.436	
2440	19		-2.274	0.69	-1.589	
2480	39		-4.711	0.69	-4.026	
2402	0	2 MBit/s 37 Byte High Power	-6.161	4.86	-1.301	
2440	19		-6.326	4.86	-1.466	
2480	39		-7.410	4.86	-2.550	
2402	0	2 MBit/s 255 Byte High Power	-6.940	2.41	-4.526	
2440	19		-7.057	2.41	-4.643	
2480	39		-7.648	2.41	-5.234	

Note :

1. Spectrum measured Value not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss + Cable loss

3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.

So, 20.52 dB is offset for 2.4 GHz Band.


4. Worst case test Plot Only : High Power 1 MBit/s (37 Byte)

▣ 1M Bit/s (37 Byte) Test Plots_High Power

Power Spectral Density (Low-CH 0)



Power Spectral Density (Mid-CH 19)

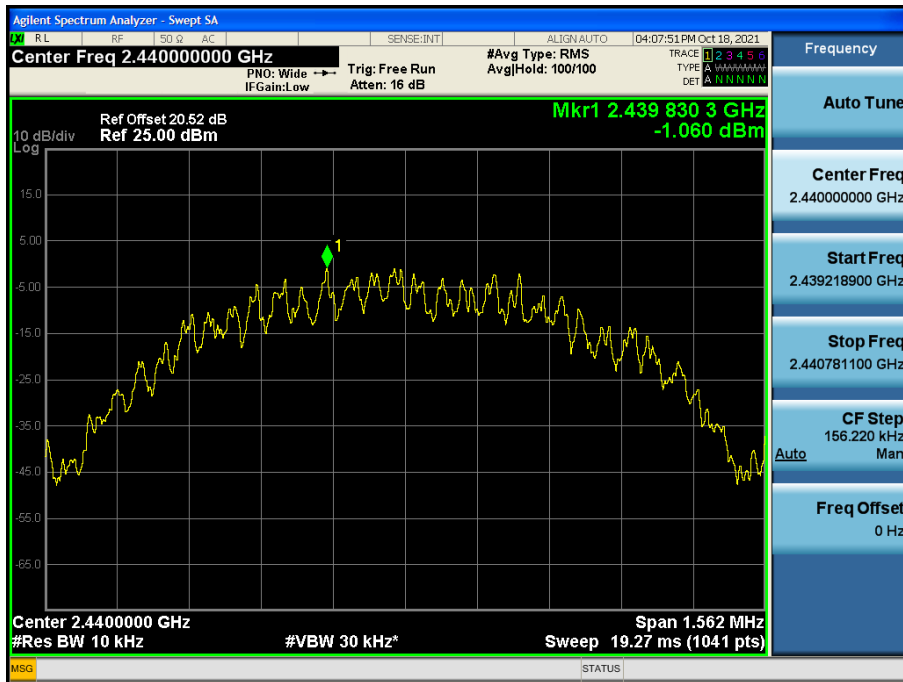

Power Spectral Density (High-CH 39)




9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS


Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.

1 MBit/s (37 Byte) Test Plots –Band Edge(High Power)
Low-CH 0

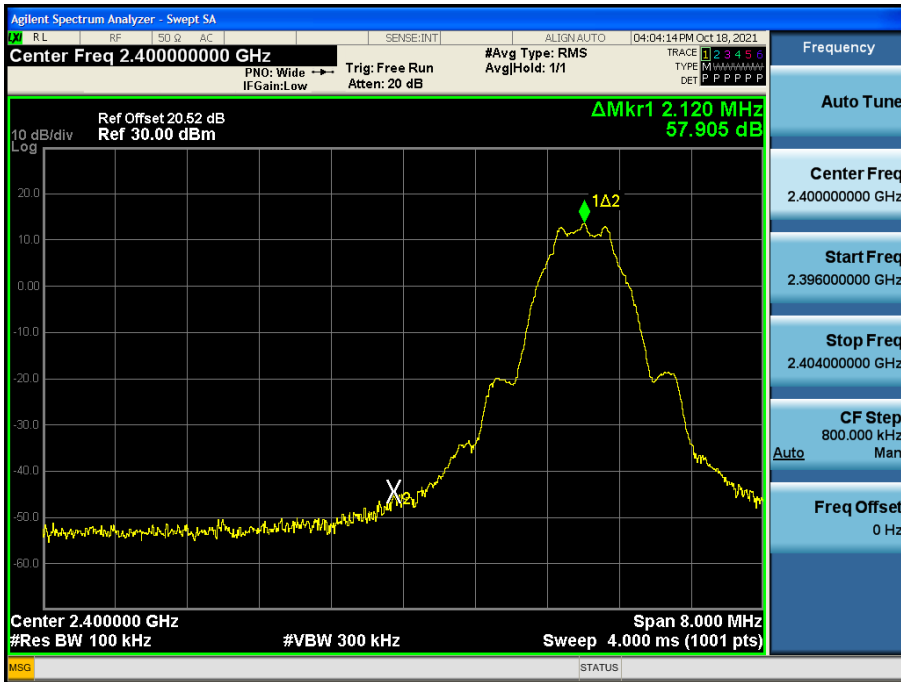


High-CH 39

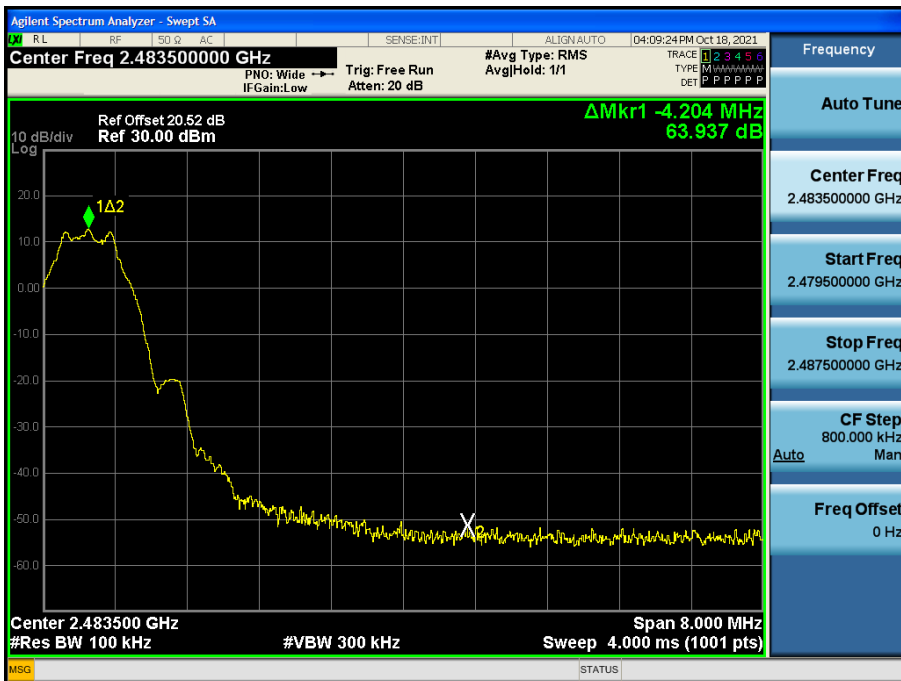

1 MBit/s (37 Byte) Test Plots -Conducted Spurious Emission(High Power)


30 MHz ~ 1 GHz

Conducted Spurious Emission (Mid-CH 19)

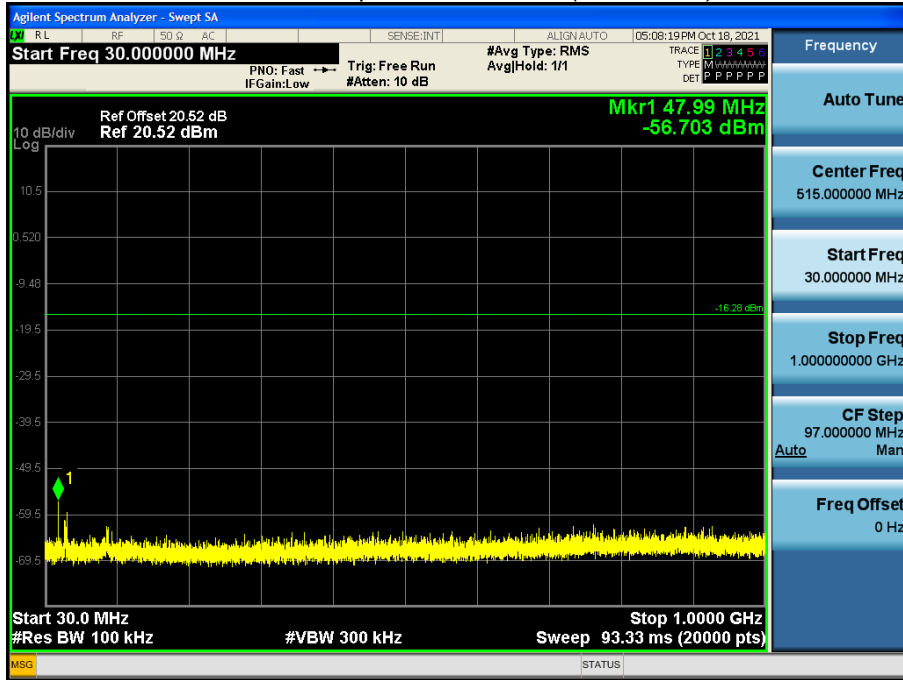


1 GHz ~ 3 GHz

Conducted Spurious Emission (Mid-CH 19)

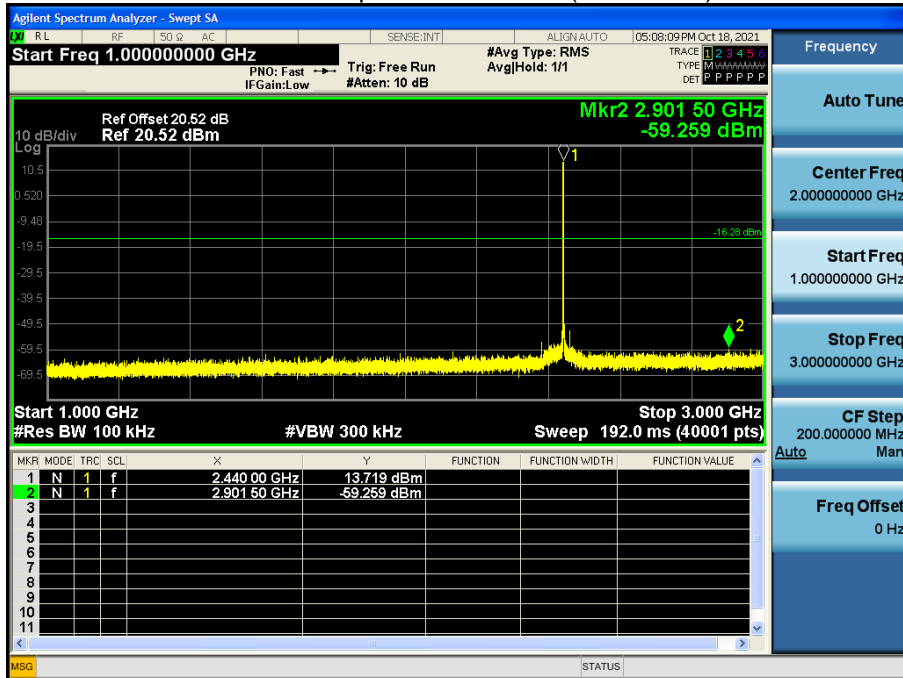


3 GHz ~ 5 GHz

Conducted Spurious Emission (Mid-CH 19)

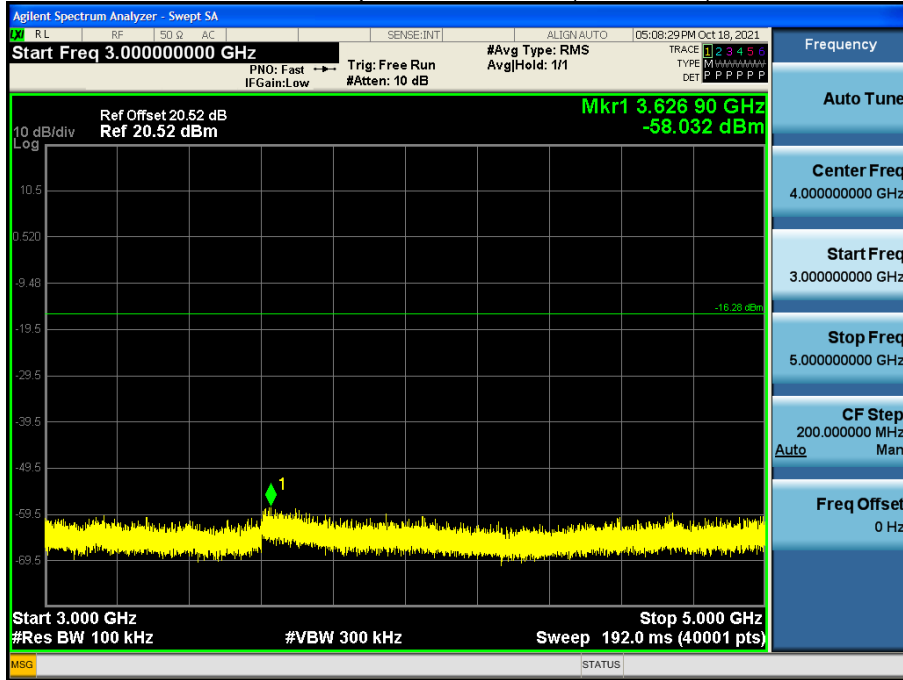


5 GHz ~ 7 GHz

Conducted Spurious Emission (Mid-CH 19)

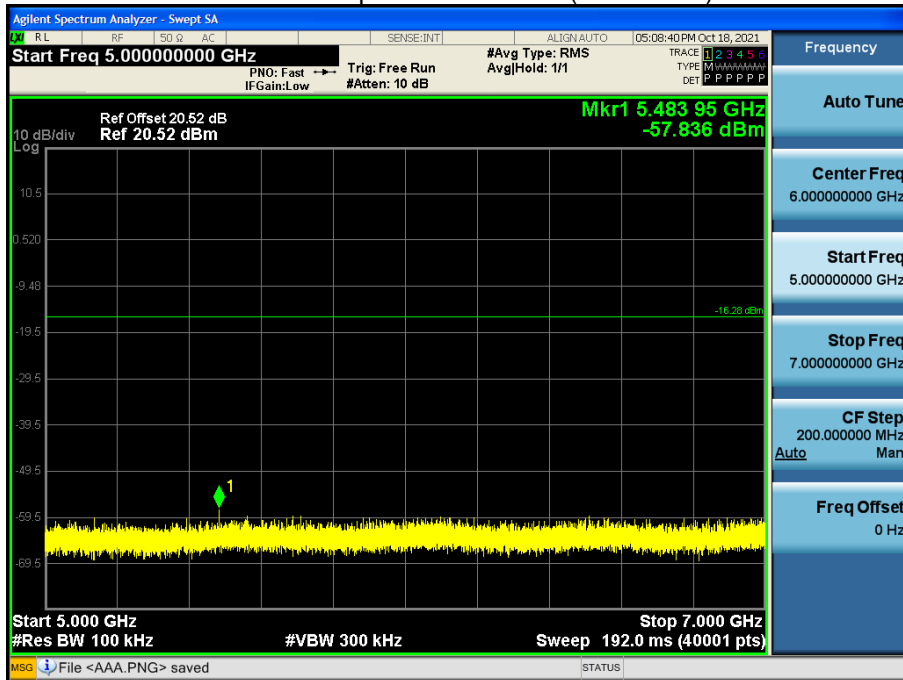


7 GHz ~ 9 GHz

Conducted Spurious Emission (Mid-CH 19)

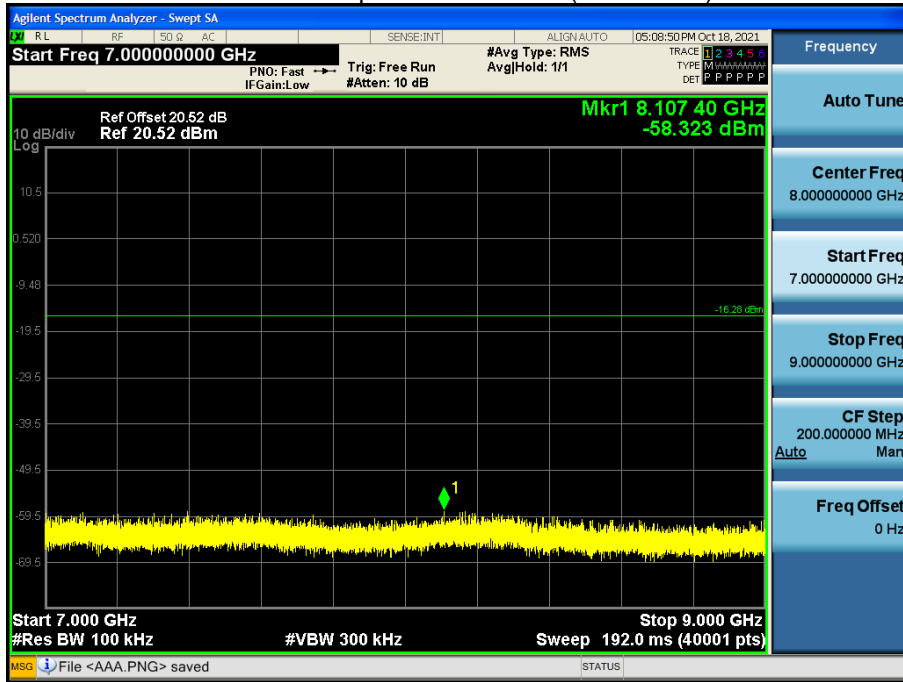


9 GHz ~ 11 GHz

Conducted Spurious Emission (Mid-CH 19)

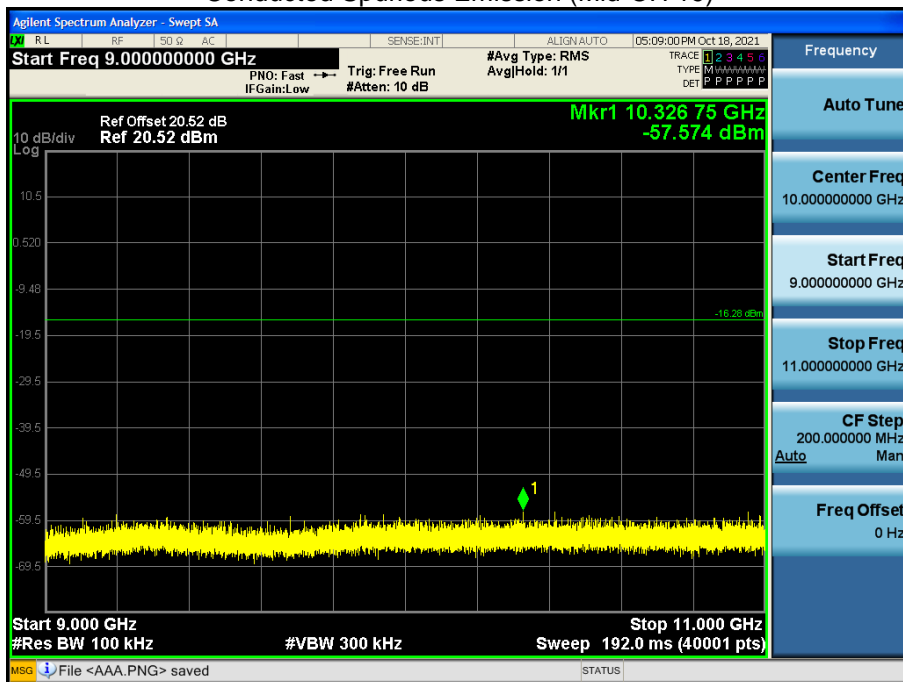


11 GHz ~ 13 GHz

Conducted Spurious Emission (Mid-CH 19)

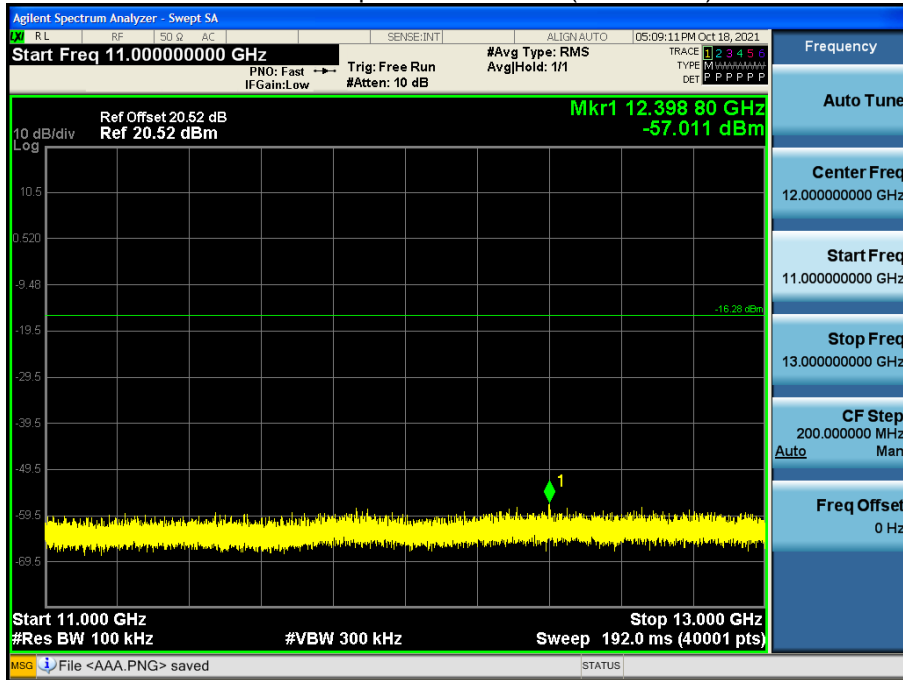


13 GHz ~ 15 GHz

Conducted Spurious Emission (Mid-CH 19)

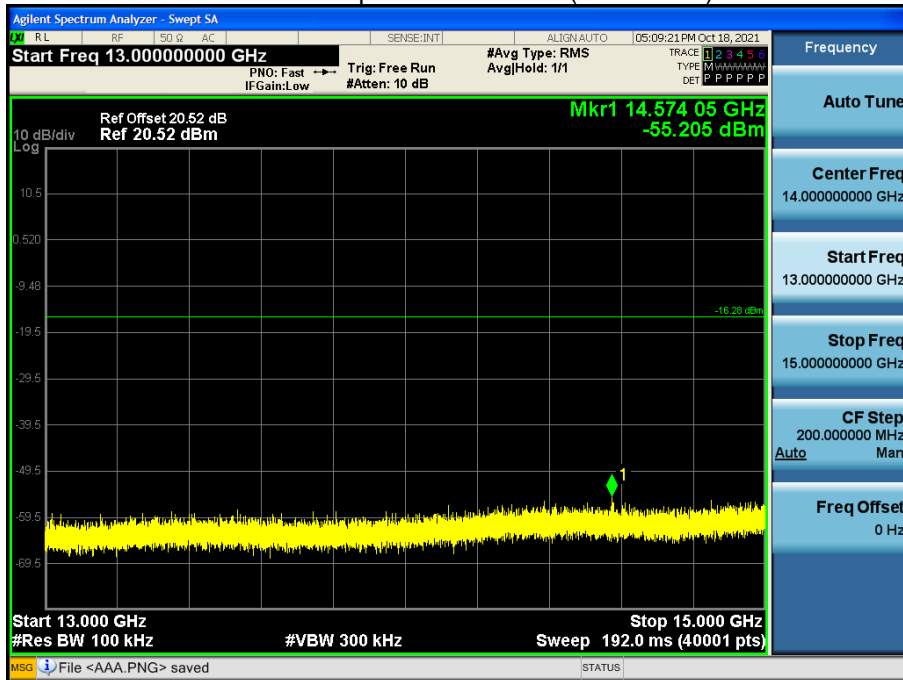


15 GHz ~ 17 GHz

Conducted Spurious Emission (Mid-CH 19)

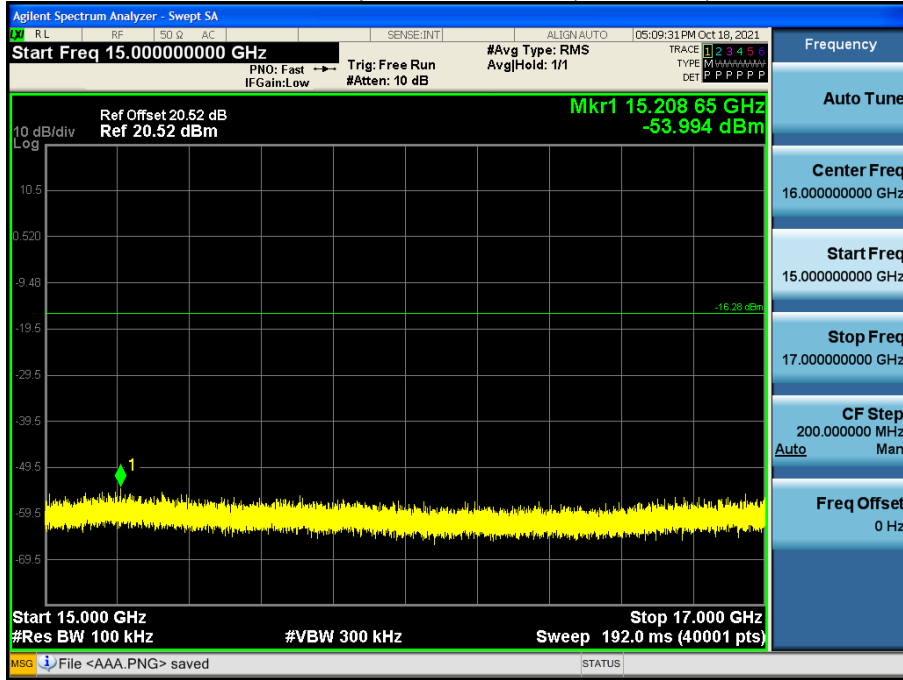


17 GHz ~ 19 GHz

Conducted Spurious Emission (Mid-CH 19)

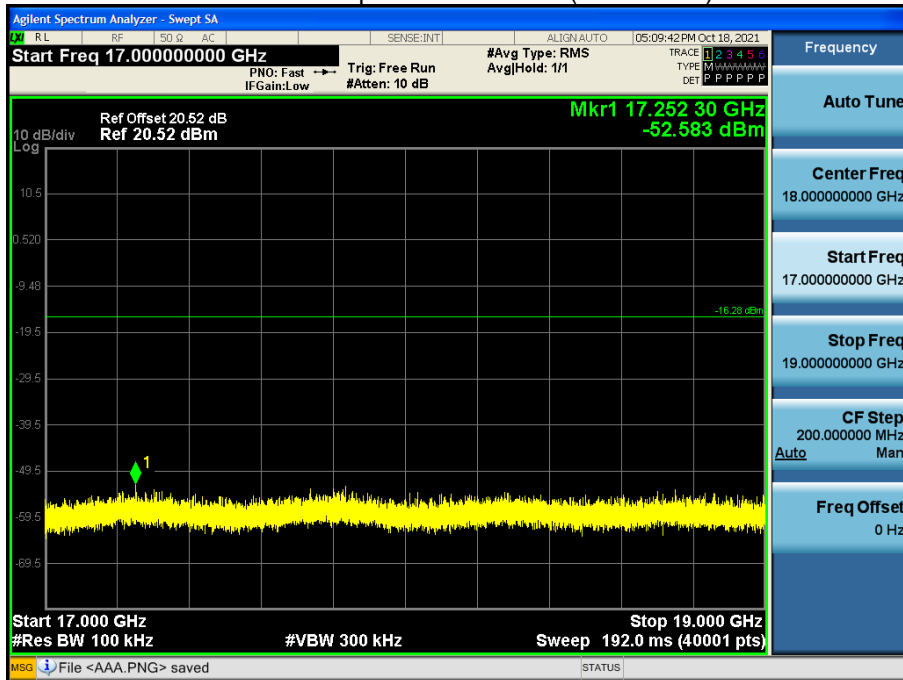


19 GHz ~ 21 GHz

Conducted Spurious Emission (Mid-CH 19)

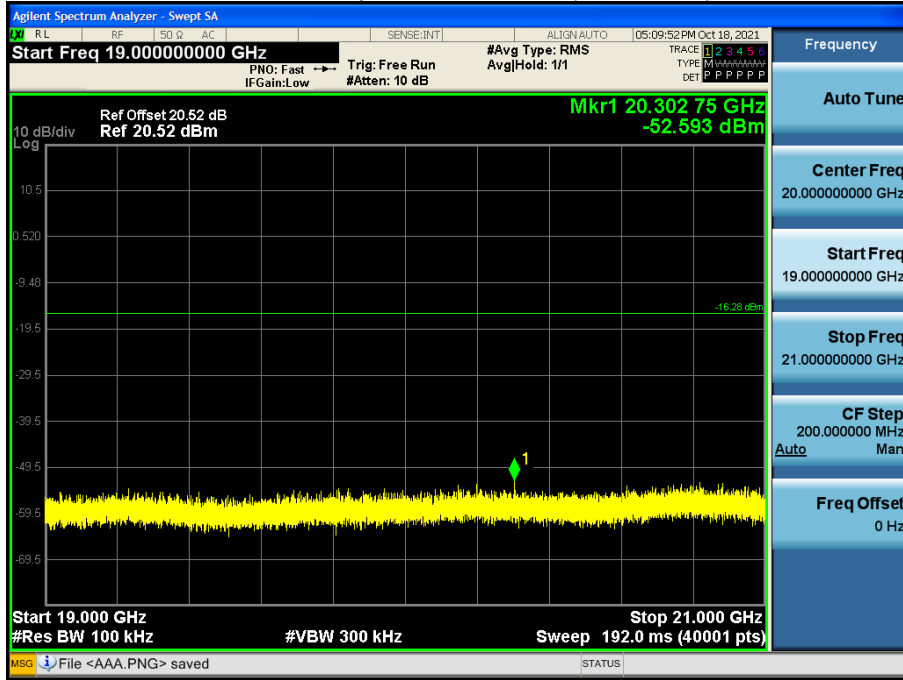


21 GHz ~ 23 GHz

Conducted Spurious Emission (Mid-CH 19)

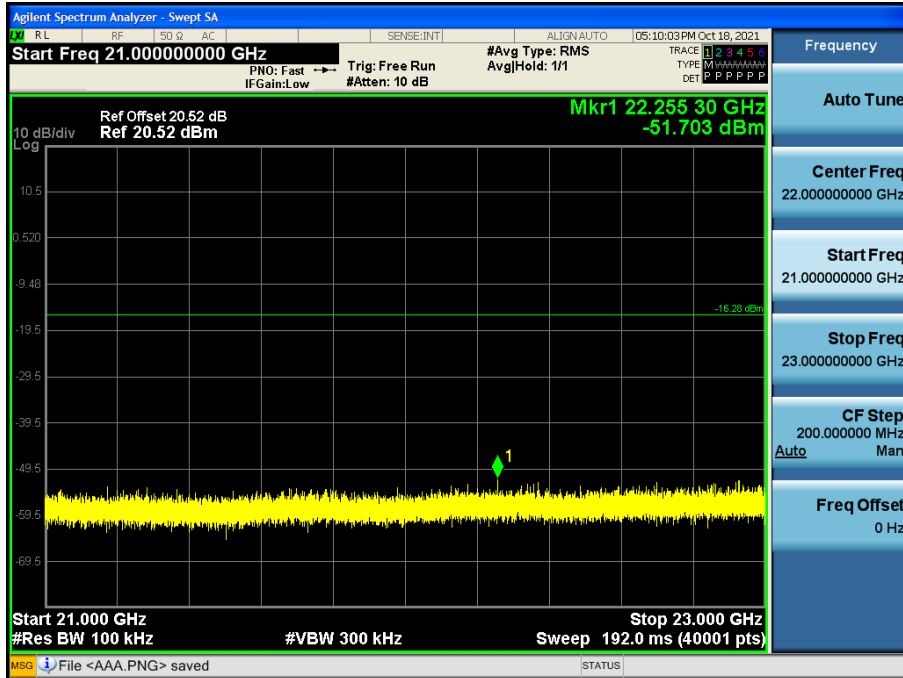


23 GHz ~ 25 GHz

Conducted Spurious Emission (Mid-CH 19)

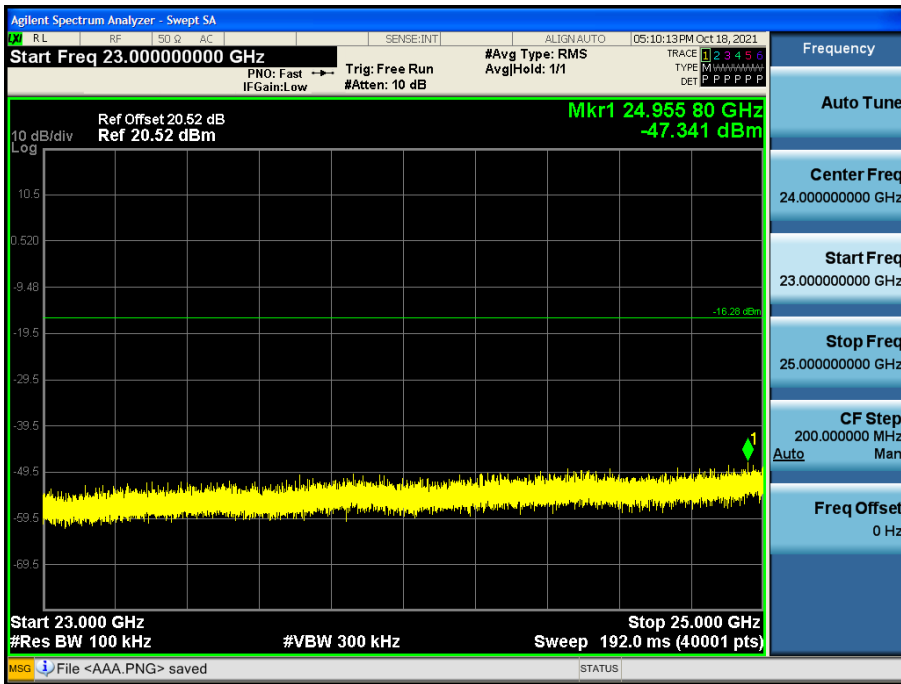

2 MBit/s (37 Byte) Test Plots –BandEdge(High Power)
Low-CH 0

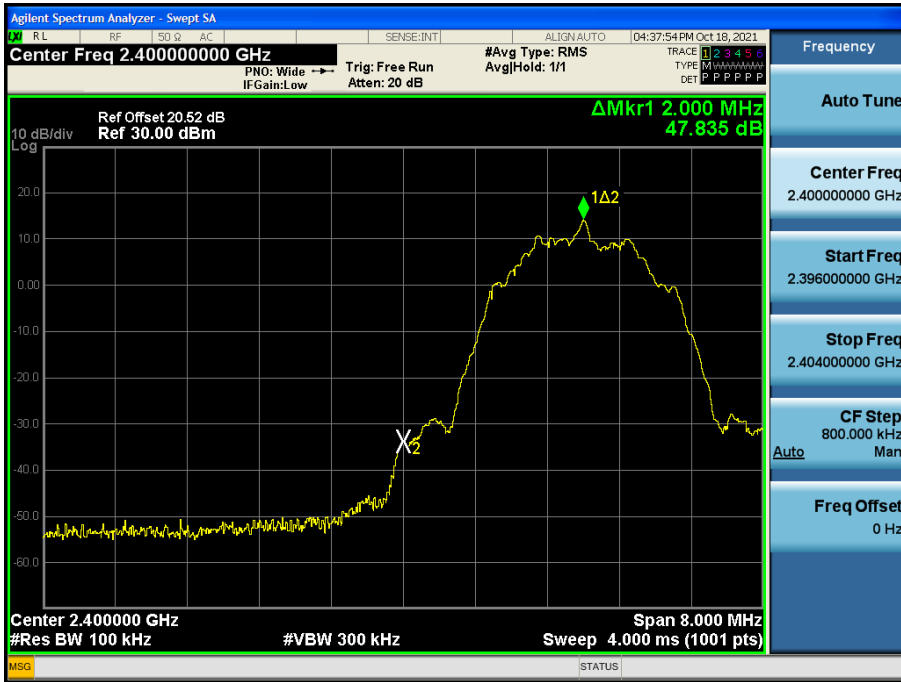


High-CH 39



2 MBit/s (37 Byte) Test Plots -Conducted Spurious Emission(High Power)


30 MHz ~ 1 GHz

Conducted Spurious Emission (Mid-CH 19)

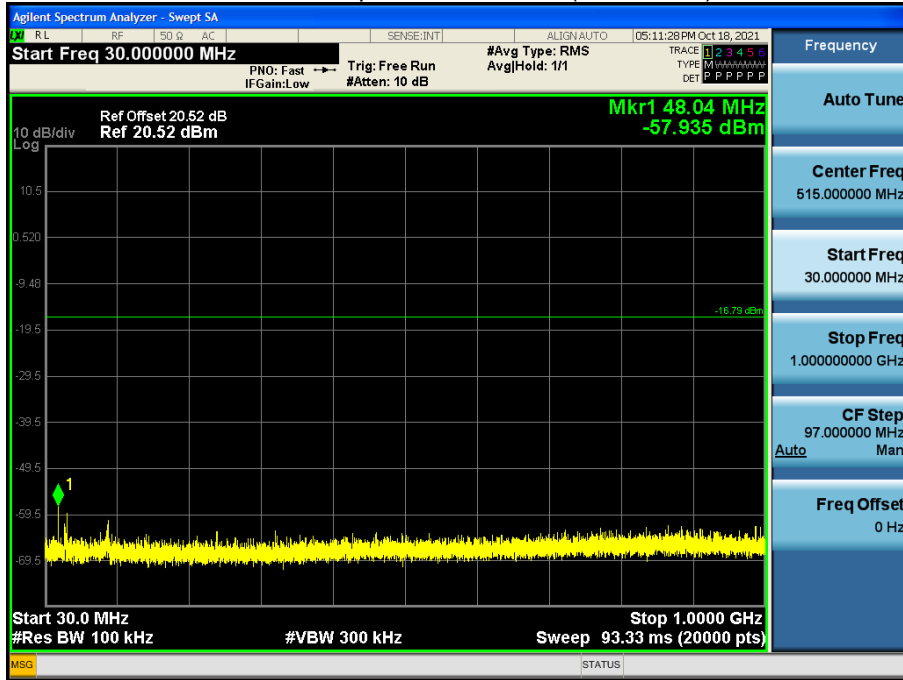


1 GHz ~ 3 GHz

Conducted Spurious Emission (Mid-CH 19)

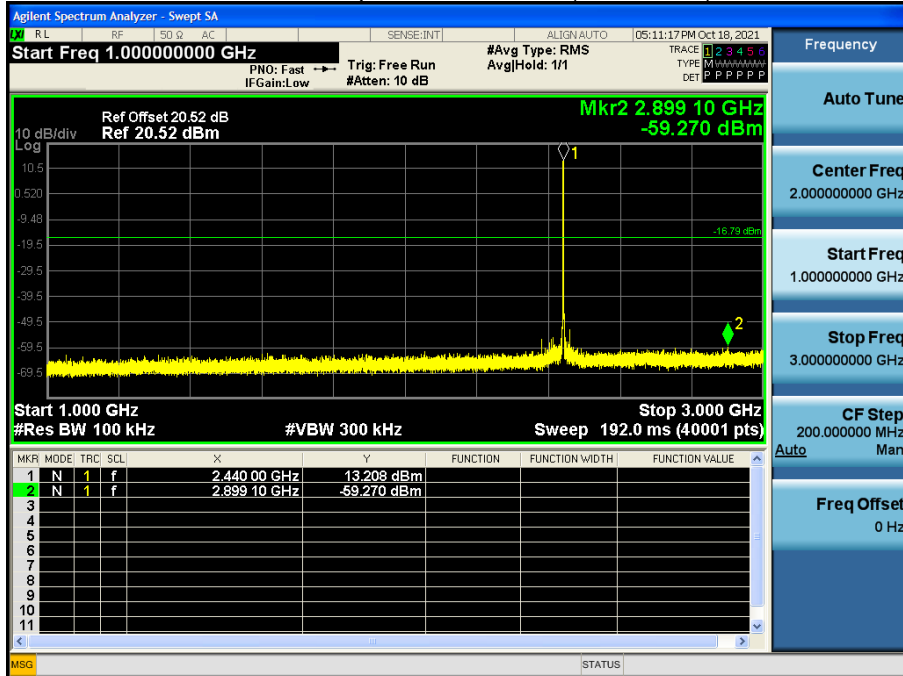


3 GHz ~ 5 GHz

Conducted Spurious Emission (Mid-CH 19)

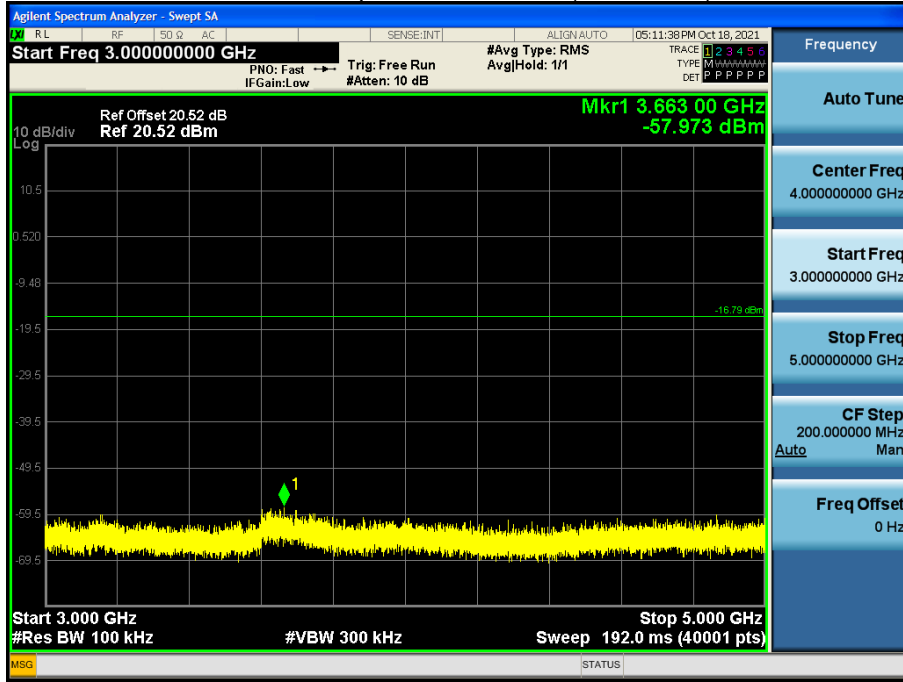


5 GHz ~ 7 GHz

Conducted Spurious Emission (Mid-CH 19)

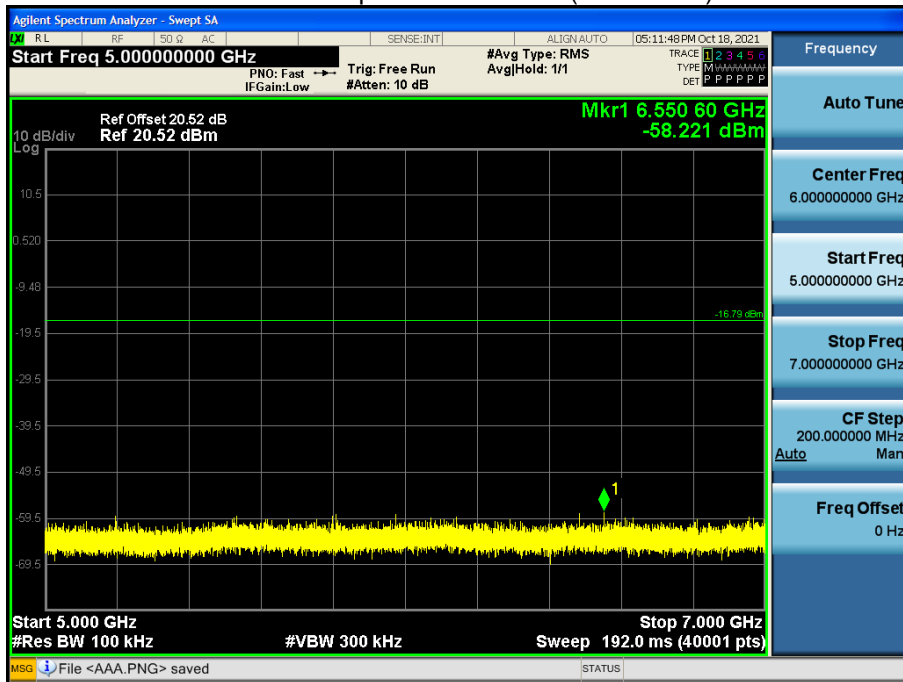


7 GHz ~ 9 GHz

Conducted Spurious Emission (Mid-CH 19)

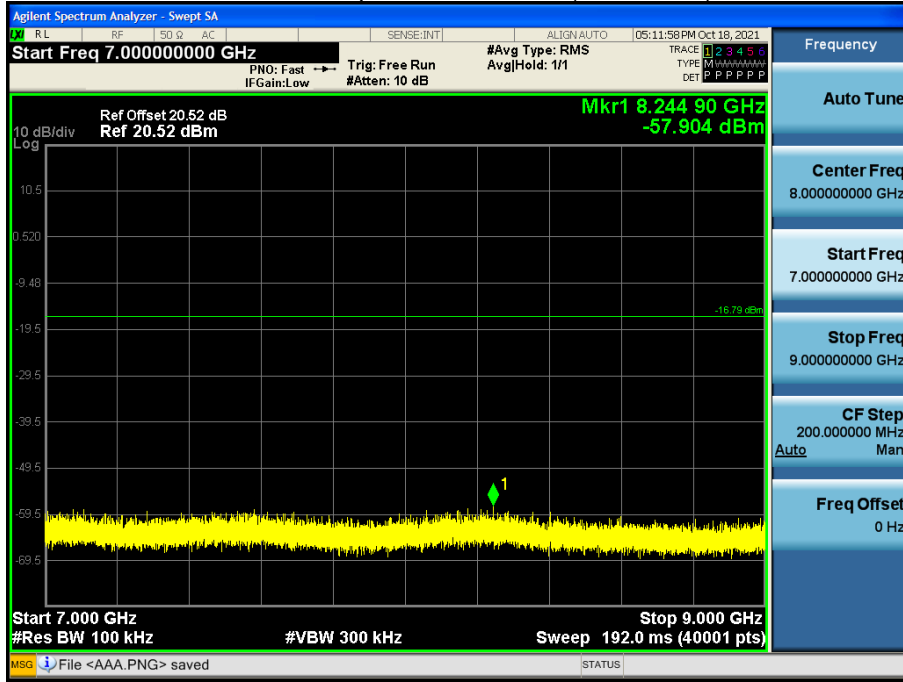


9 GHz ~ 11 GHz

Conducted Spurious Emission (Mid-CH 19)

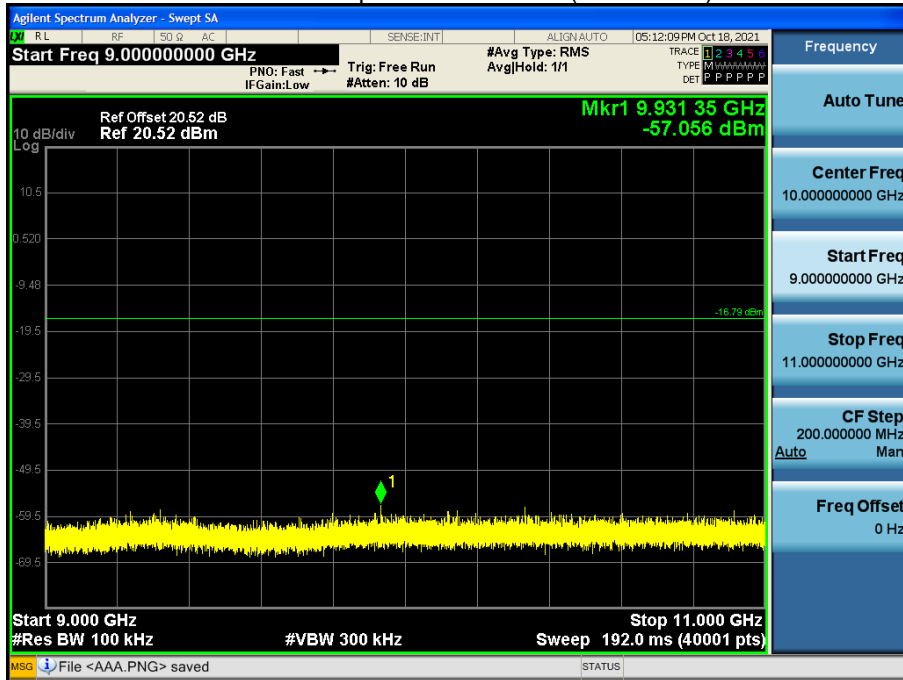


11 GHz ~ 13 GHz

Conducted Spurious Emission (Mid-CH 19)

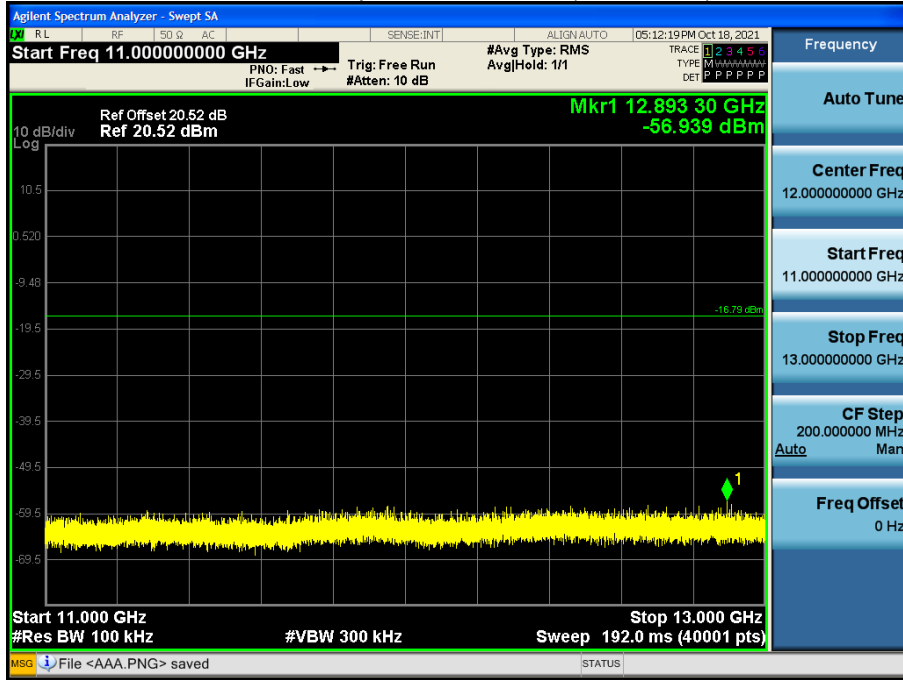


13 GHz ~ 15 GHz

Conducted Spurious Emission (Mid-CH 19)

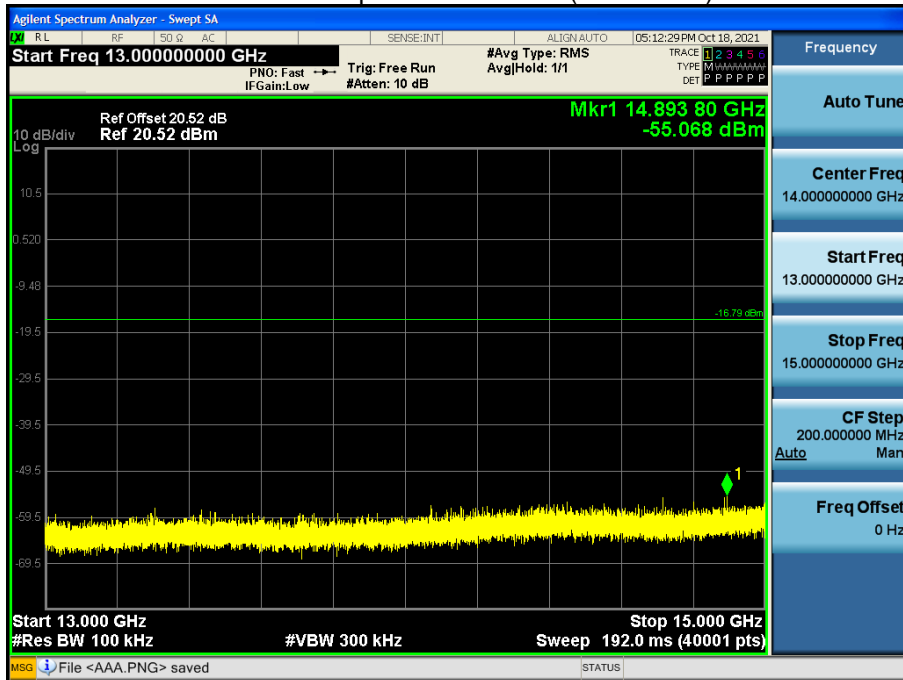


15 GHz ~ 17 GHz

Conducted Spurious Emission (Mid-CH 19)

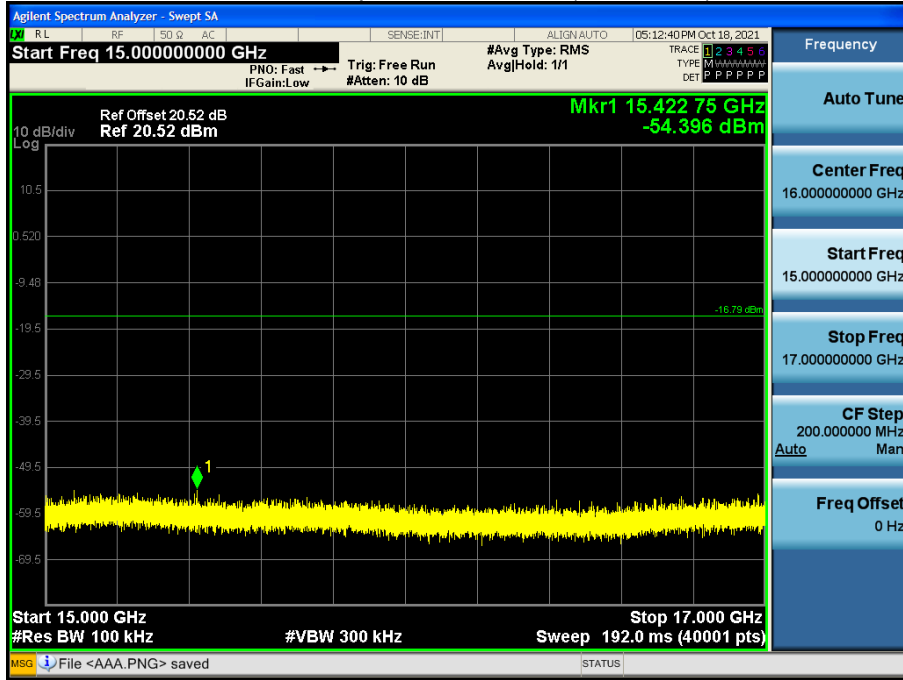


17 GHz ~ 19 GHz

Conducted Spurious Emission (Mid-CH 19)

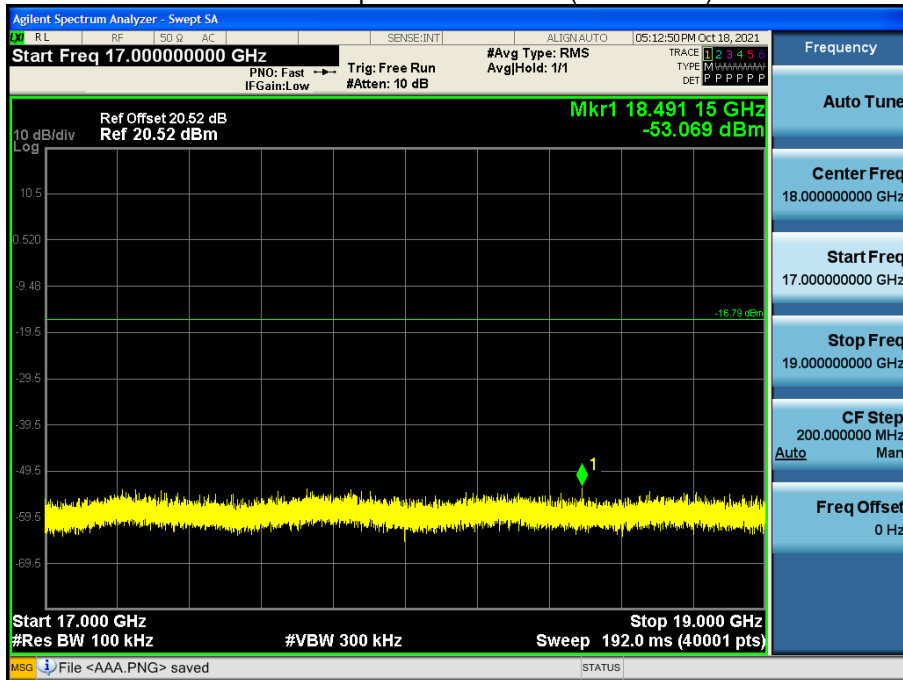


19 GHz ~ 21 GHz

Conducted Spurious Emission (Mid-CH 19)

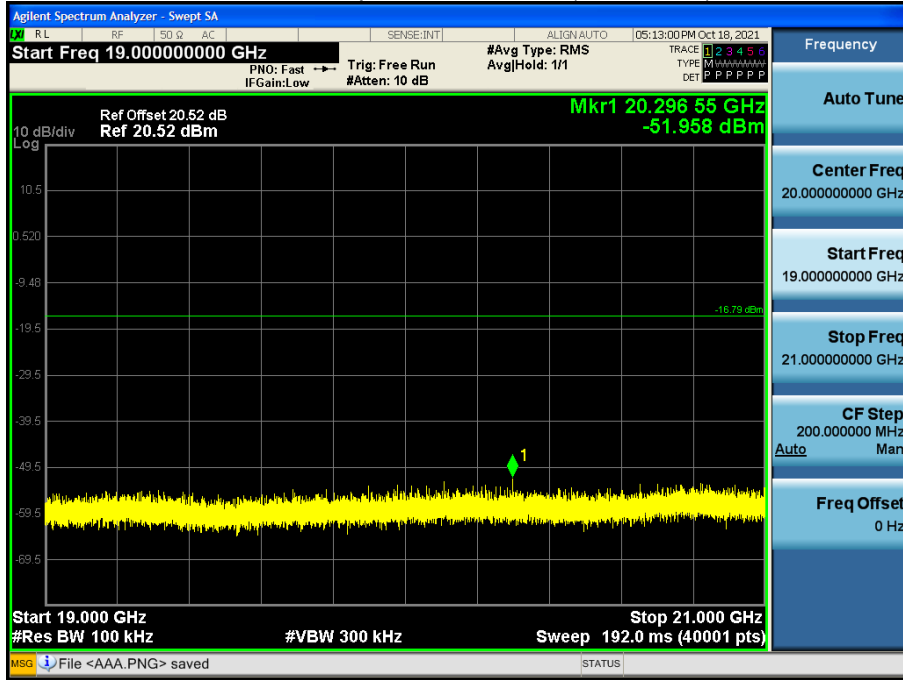


21 GHz ~ 23 GHz

Conducted Spurious Emission (Mid-CH 19)

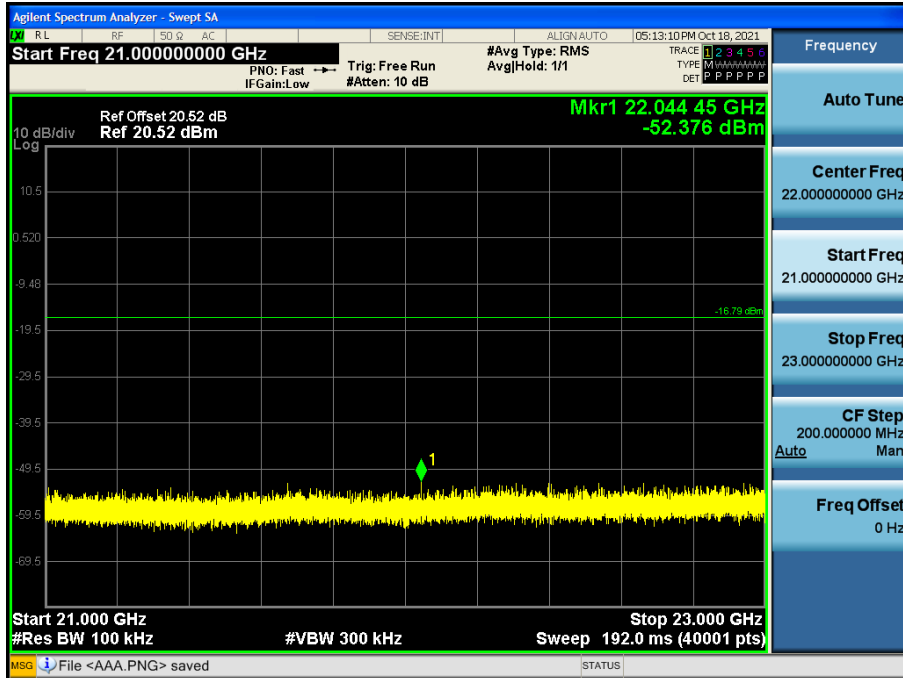

23 GHz ~ 25 GHz

Conducted Spurious Emission (Mid-CH 19)

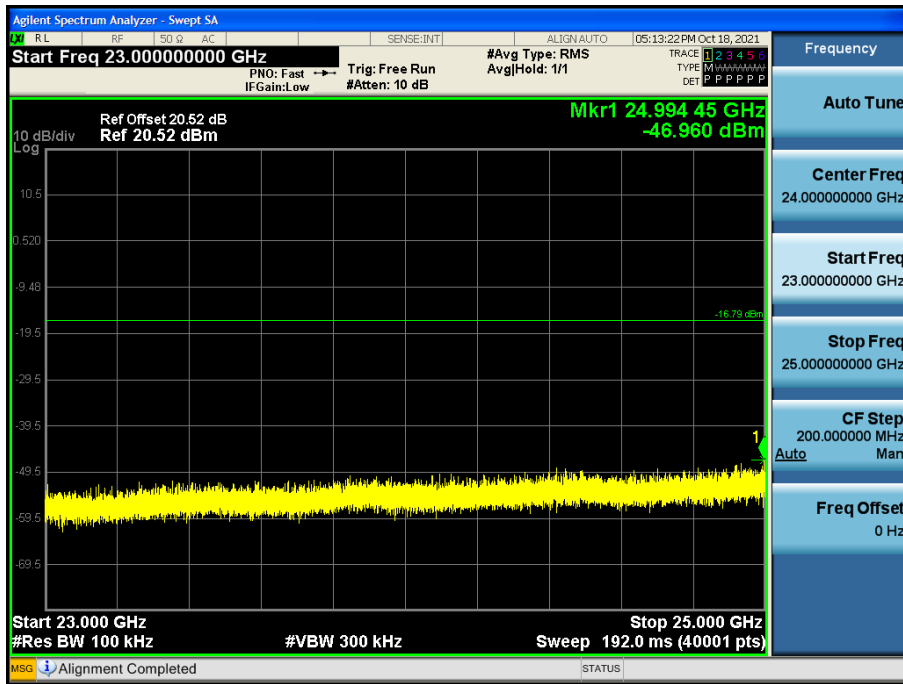

9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30 MHz

Frequency	Measured Value	A.F+C.L+D.F	POL	Total	Limit	Margin
[MHz]	[dBµV]	[dB/m]	[H/V]	[dBµV/m]	[dBµV/m]	[dB]
No Critical peaks found						

Note:

1. The Measured of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBµV) + Distance extrapolation factor
4. Radiated test is performed with hopping off.

Frequency Range : Below 1 GHz

Frequency	Measured Value	A.F+C.L	POL	Total	Limit	Margin
[MHz]	[dBµV]	[dB/m]	[H/V]	[dBµV/m]	[dBµV/m]	[dB]
No Critical peaks found						

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
2. Radiated test is performed with hopping off.

Frequency Range : Above 1 GHz

Mode : 1 MBit/s (37 Byte)_Normal

Operation Mode: CH Low

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB/m]	Pol. [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4804	40.86	0.00	5.14	V	46.00	73.98	27.98	PK
4804	28.79	2.06	5.14	V	35.99	53.98	17.99	AV
7206	37.96	0.00	12.89	V	50.85	73.98	23.13	PK
7206	25.82	2.06	12.89	V	40.77	53.98	13.21	AV
4804	41.03	0.00	5.14	H	46.17	73.98	27.81	PK
4804	28.82	2.06	5.14	H	36.02	53.98	17.96	AV
7206	37.98	0.00	12.89	H	50.87	73.98	23.11	PK
7206	25.86	2.06	12.89	H	40.81	53.98	13.17	AV

Operation Mode: CH Mid

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB/m]	Pol. [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4880	40.95	0.00	5.44	V	46.39	73.98	27.59	PK
4880	28.48	2.06	5.44	V	35.98	53.98	18.00	AV
7320	38.12	0.00	12.98	V	51.10	73.98	22.88	PK
7320	25.92	2.06	12.98	V	40.96	53.98	13.02	AV
4880	40.73	0.00	5.44	H	46.17	73.98	27.81	PK
4880	28.43	2.06	5.44	H	35.93	53.98	18.05	AV
7320	37.60	0.00	12.98	H	50.58	73.98	23.40	PK
7320	25.87	2.06	12.98	H	40.91	53.98	13.07	AV

Operation Mode: CH High

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB/m]	Pol. [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4960	41.28	0.00	6.25	V	47.53	73.98	26.45	PK
4960	28.83	2.06	6.25	V	37.14	53.98	16.84	AV
7440	38.15	0.00	12.61	V	50.76	73.98	23.22	PK
7440	26.12	2.06	12.61	V	40.79	53.98	13.19	AV
4960	41.59	0.00	6.25	H	47.84	73.98	26.14	PK
4960	28.86	2.06	6.25	H	37.17	53.98	16.81	AV
7440	38.49	0.00	12.61	H	51.10	73.98	22.88	PK
7440	26.15	2.06	12.61	H	40.82	53.98	13.16	AV

Mode : 2 MBit/s (37 Byte)_Normal

Operation Mode: CH Low

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB/m]	Pol. [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4804	40.64	0.00	5.14	V	45.78	73.98	28.20	PK
4804	28.82	4.83	5.14	V	38.79	53.98	15.19	AV
7206	37.92	0.00	12.89	V	50.81	73.98	23.17	PK
7206	25.84	4.83	12.89	V	43.56	53.98	10.42	AV
4804	40.90	0.00	5.14	H	46.04	73.98	27.94	PK
4804	28.85	4.83	5.14	H	38.82	53.98	15.16	AV
7206	38.01	0.00	12.89	H	50.90	73.98	23.08	PK
7206	25.87	4.83	12.89	H	43.59	53.98	10.39	AV

Operation Mode: CH Mid

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB/m]	Pol. [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4880	40.90	0.00	5.44	V	46.34	73.98	27.64	PK
4880	28.45	4.83	5.44	V	38.72	53.98	15.26	AV
7320	38.45	0.00	12.98	V	51.43	73.98	22.55	PK
7320	25.88	4.83	12.98	V	43.69	53.98	10.29	AV
4880	40.82	0.00	5.44	H	46.26	73.98	27.72	PK
4880	28.42	4.83	5.44	H	38.69	53.98	15.29	AV
7320	37.89	0.00	12.98	H	50.87	73.98	23.11	PK
7320	25.86	4.83	12.98	H	43.67	53.98	10.31	AV

Operation Mode: CH High

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB/m]	Pol. [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4960	41.20	0.00	6.25	V	47.45	73.98	26.53	PK
4960	28.84	4.83	6.25	V	39.92	53.98	14.06	AV
7440	38.19	0.00	12.61	V	50.80	73.98	23.18	PK
7440	26.11	4.83	12.61	V	43.55	53.98	10.43	AV
4960	41.25	0.00	6.25	H	47.50	73.98	26.48	PK
4960	28.87	4.83	6.25	H	39.95	53.98	14.03	AV
7440	38.59	0.00	12.61	H	51.20	73.98	22.78	PK
7440	26.13	4.83	12.61	H	43.57	53.98	10.41	AV

Mode : 1 MBit/s (37 Byte)_ High Power

Operation Mode: CH Low

Frequency [MHz]	Measured Value [dB μ V]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB/m]	Pol. [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4804	41.56	0.00	5.14	V	46.70	73.98	27.28	PK
4804	28.96	2.07	5.14	V	36.17	53.98	17.81	AV
7206	38.53	0.00	12.89	V	51.42	73.98	22.56	PK
7206	25.98	2.07	12.89	V	40.94	53.98	13.04	AV
4804	41.71	0.00	5.14	H	46.85	73.98	27.13	PK
4804	29.08	2.07	5.14	H	36.29	53.98	17.69	AV
7206	38.79	0.00	12.89	H	51.68	73.98	22.30	PK
7206	26.03	2.07	12.89	H	40.99	53.98	12.99	AV

Operation Mode: CH Mid

Frequency [MHz]	Measured Value [dB μ V]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB/m]	Pol. [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4880	40.97	0.00	5.44	V	46.41	73.98	27.57	PK
4880	28.62	2.07	5.44	V	36.13	53.98	17.85	AV
7320	38.47	0.00	12.98	V	51.45	73.98	22.53	PK
7320	26.04	2.07	12.98	V	41.09	53.98	12.89	AV
4880	41.30	0.00	5.44	H	46.74	73.98	27.24	PK
4880	28.70	2.07	5.44	H	36.21	53.98	17.77	AV
7320	38.72	0.00	12.98	H	51.70	73.98	22.28	PK
7320	26.08	2.07	12.98	H	41.13	53.98	12.85	AV

Operation Mode: CH High

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB/m]	Pol. [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4960	41.88	0.00	6.25	V	48.13	73.98	25.85	PK
4960	29.09	2.07	6.25	V	37.41	53.98	16.57	AV
7440	38.76	0.00	12.61	V	51.37	73.98	22.61	PK
7440	26.18	2.07	12.61	V	40.86	53.98	13.12	AV
4960	42.16	0.00	6.25	H	48.41	73.98	25.57	PK
4960	29.18	2.07	6.25	H	37.50	53.98	16.48	AV
7440	38.98	0.00	12.61	H	51.59	73.98	22.39	PK
7440	26.33	2.07	12.61	H	41.01	53.98	12.97	AV

Mode : 2 MBit/s (37 Byte)_ High Power

Operation Mode: CH Low

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB/m]	Pol. [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4804	41.27	0.00	5.14	V	46.41	73.98	27.57	PK
4804	29.02	4.86	5.14	V	39.02	53.98	14.96	AV
7206	38.10	0.00	12.89	V	50.99	73.98	22.99	PK
7206	25.84	4.86	12.89	V	43.59	53.98	10.39	AV
4804	41.41	0.00	5.14	H	46.55	73.98	27.43	PK
4804	29.13	4.86	5.14	H	39.13	53.98	14.85	AV
7206	38.29	0.00	12.89	H	51.18	73.98	22.80	PK
7206	26.02	4.86	12.89	H	43.77	53.98	10.21	AV

Operation Mode: CH Mid


Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB/m]	Pol. [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4880	40.93	0.00	5.44	V	46.37	73.98	27.61	PK
4880	28.52	4.86	5.44	V	38.82	53.98	15.16	AV
7320	38.61	0.00	12.98	V	51.59	73.98	22.39	PK
7320	25.92	4.86	12.98	V	43.76	53.98	10.22	AV
4880	41.25	0.00	5.44	H	46.69	73.98	27.29	PK
4880	28.66	4.86	5.44	H	38.96	53.98	15.02	AV
7320	38.76	0.00	12.98	H	51.74	73.98	22.24	PK
7320	26.04	4.86	12.98	H	43.88	53.98	10.10	AV

Operation Mode: CH High


Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB/m]	Pol. [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4960	41.54	0.00	6.25	V	47.79	73.98	26.19	PK
4960	29.04	4.86	6.25	V	40.15	53.98	13.83	AV
7440	38.96	0.00	12.61	V	51.57	73.98	22.41	PK
7440	26.25	4.86	12.61	V	43.72	53.98	10.26	AV
4960	41.73	0.00	6.25	H	47.98	73.98	26.00	PK
4960	29.16	4.86	6.25	H	40.27	53.98	13.71	AV
7440	39.10	0.00	12.61	H	51.71	73.98	22.27	PK
7440	26.32	4.86	12.61	H	43.79	53.98	10.19	AV

▣ 1 MBit/s 37 Byte Test Plots (Worst case : Z-V)_Normal

Radiated Spurious Emissions plot – Average Result (Ch.19 3rd Harmonic)

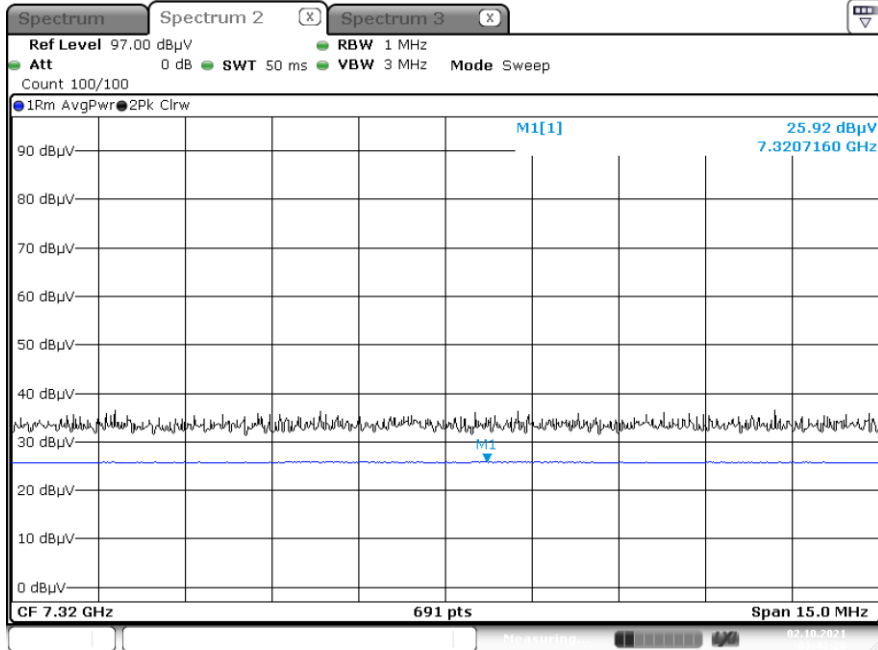


Radiated Spurious Emissions plot – Peak Result (Ch.19 3rd Harmonic)

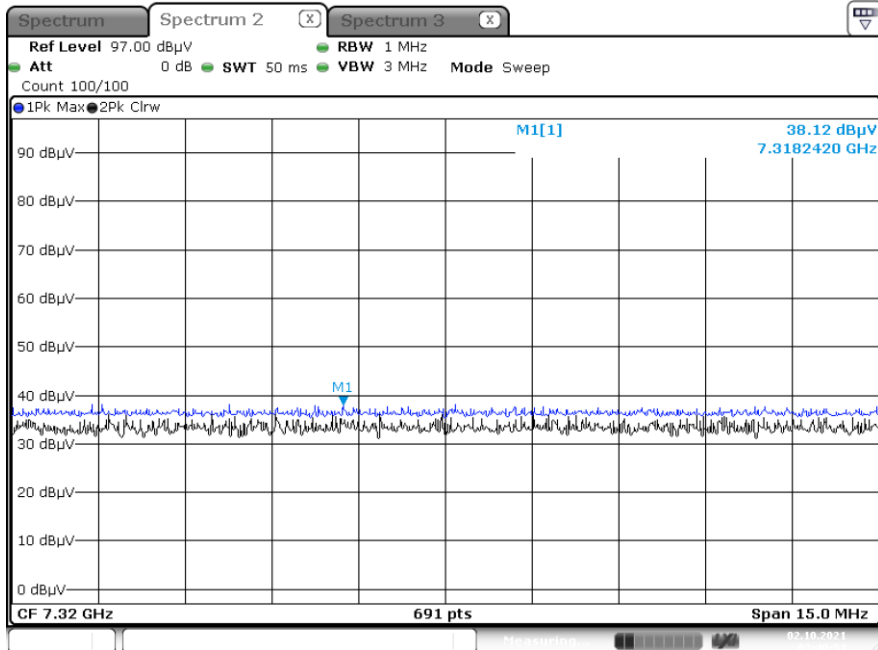


2 MBit/s 37 Byte Test Plots (Worst case : Z-V)_Normal

Radiated Spurious Emissions plot – Average Result (Ch.19 3rd Harmonic)

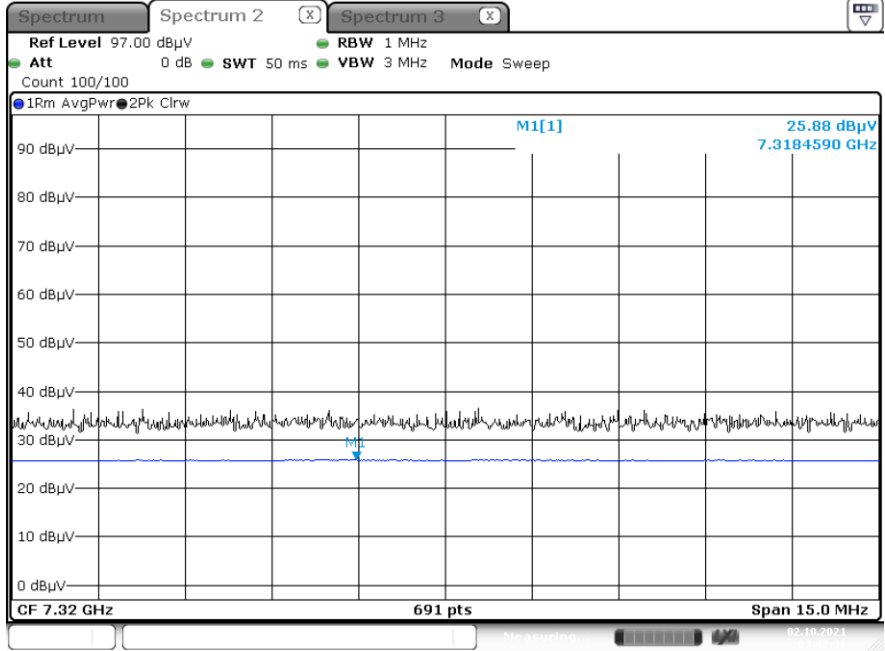


Radiated Spurious Emissions plot – Peak Result (Ch.19 3rd Harmonic)

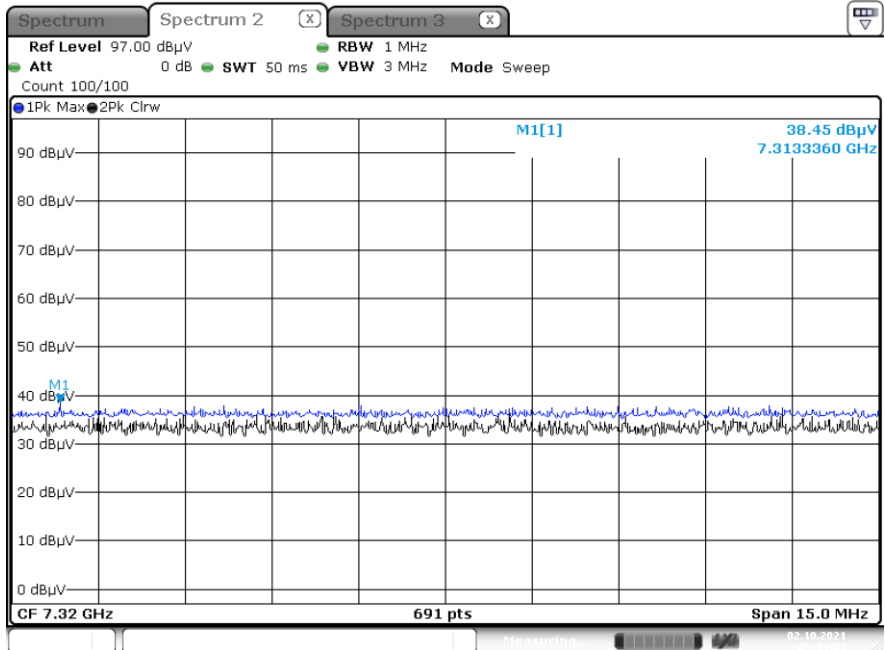


☑ 1 MBit/s 37 Byte Test Plots (Worst case : Z-H)_ High Power

Radiated Spurious Emissions plot – Average Result (Ch.19 3rd Harmonic)

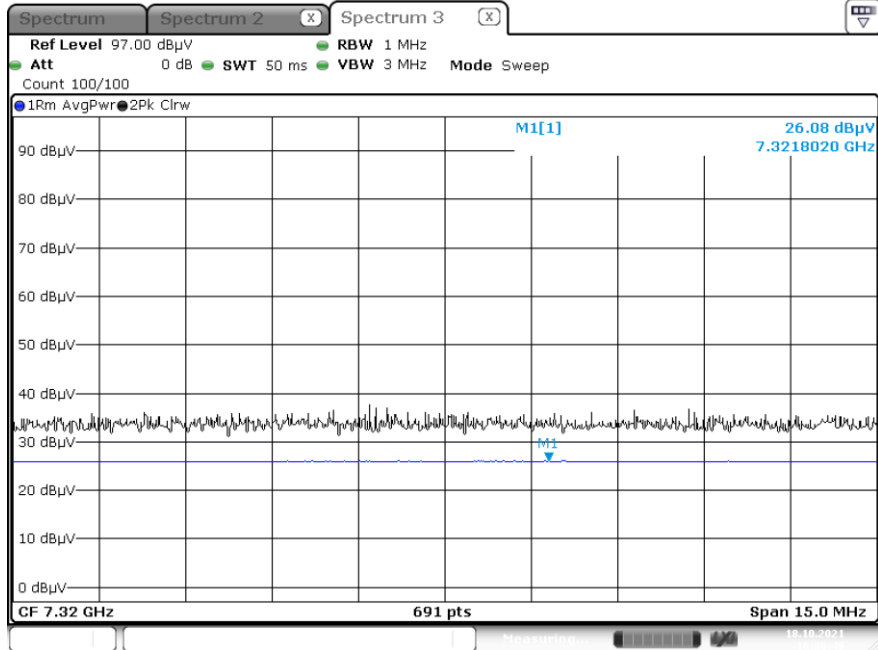


Radiated Spurious Emissions plot – Peak Result (Ch.19 3rd Harmonic)

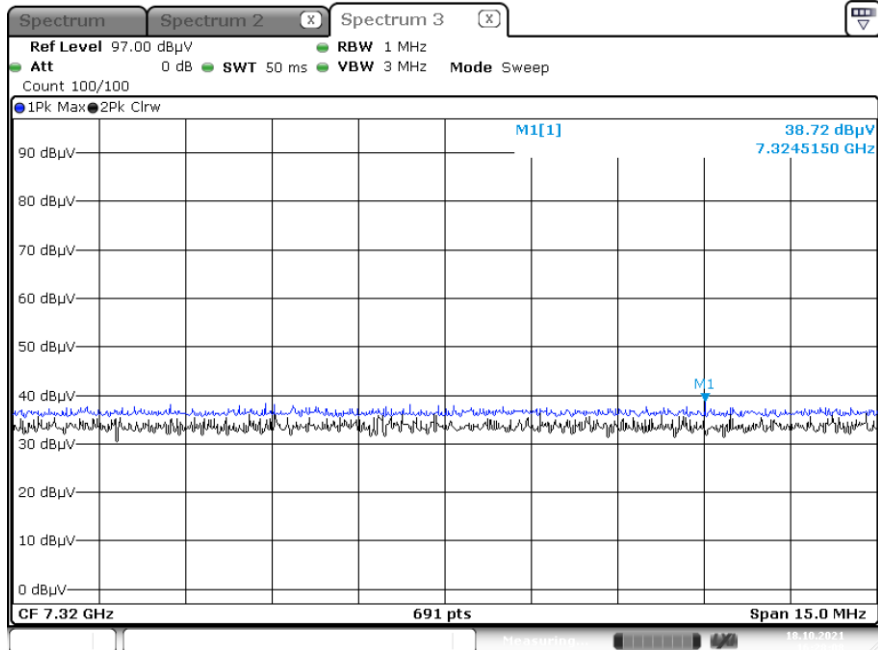


2 MBit/s 37 Byte Test Plots (Worst case : Z-H)_ High Power

Radiated Spurious Emissions plot – Average Result (Ch.19 3rd Harmonic)

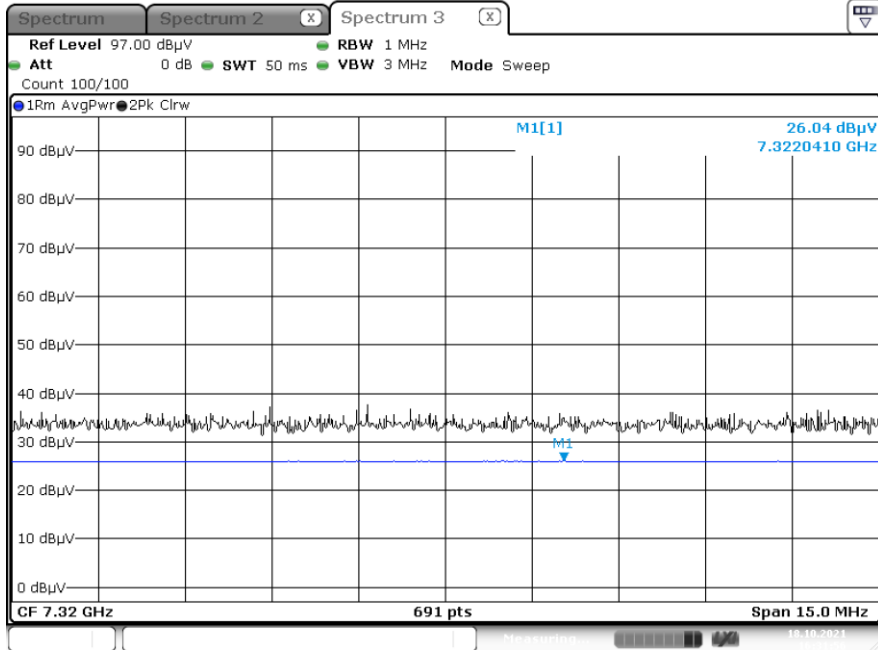

Radiated Spurious Emissions plot – Peak Result (Ch.19 3rd Harmonic)

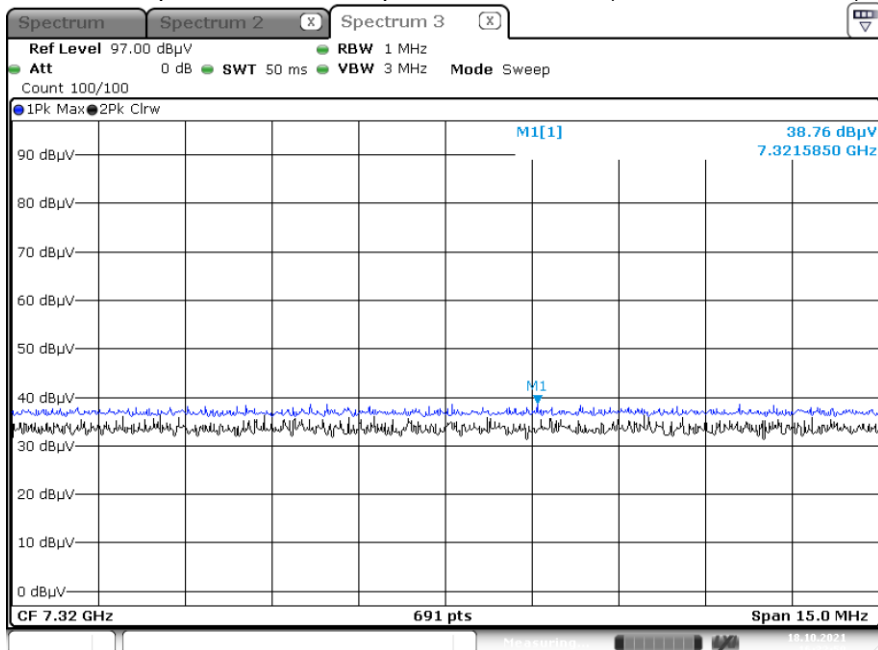

Note:

Plot of worst case are only reported.

9.7 RADIATED RESTRICTED BAND EDGES

Mode : 125k Bit/s (37 Byte)

Operating Frequency 2402 MHz, 2480 MHz

Channel No. 0 CH, 39 CH

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ATT -A.G+D.F [dB/m]	Ant. Pol. [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	47.01	0.00	2.99	H	50.00	73.98	23.98	PK
2390.0	35.22	0.82	2.99	H	39.03	53.98	14.95	AV
2390.0	46.89	0.00	2.99	V	49.88	73.98	24.10	PK
2390.0	35.17	0.82	2.99	V	38.98	53.98	15.00	AV
2483.5	48.93	0.00	4.20	H	53.13	73.98	20.85	PK
2483.5	35.26	0.82	4.20	H	40.28	53.98	13.70	AV
2483.5	48.78	0.00	4.20	V	52.98	73.98	21.00	PK
2483.5	35.05	0.82	4.20	V	40.07	53.98	13.91	AV

Mode : 125k Bit/s (255 Byte)

Operating Frequency 2402 MHz, 2480 MHz

Channel No. 0 CH, 39 CH

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ATT -A.G+D.F [dB/m]	Ant. Pol. [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	47.33	0.00	2.99	H	50.32	73.98	23.66	PK
2390.0	35.30	0.11	2.99	H	38.40	53.98	15.58	AV
2390.0	47.14	0.00	2.99	V	50.13	73.98	23.85	PK
2390.0	35.25	0.11	2.99	V	38.35	53.98	15.63	AV
2483.5	47.56	0.00	4.20	H	51.76	73.98	22.22	PK
2483.5	35.41	0.11	4.20	H	39.72	53.98	14.26	AV
2483.5	47.37	0.00	4.20	V	51.57	73.98	22.41	PK
2483.5	35.20	0.11	4.20	V	39.51	53.98	14.47	AV

Mode : 500k Bit/s (37 Byte)

Operating Frequency 2402 MHz, 2480 MHz

Channel No. 0 CH, 39 CH

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ATT -A.G+D.F [dB/m]	Ant. Pol. [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	47.11	0.00	2.99	H	50.10	73.98	23.88	PK
2390.0	35.11	2.45	2.99	H	40.55	53.98	13.43	AV
2390.0	47.04	0.00	2.99	V	50.03	73.98	23.95	PK
2390.0	35.08	2.45	2.99	V	40.52	53.98	13.46	AV
2483.5	49.55	0.00	4.20	H	53.75	73.98	20.23	PK
2483.5	35.15	2.45	4.20	H	41.80	53.98	12.18	AV
2483.5	49.25	0.00	4.20	V	53.45	73.98	20.53	PK
2483.5	34.88	2.45	4.20	V	41.53	53.98	12.45	AV

Mode : 500k Bit/s (255 Byte)

Operating Frequency 2402 MHz, 2480 MHz

Channel No. 0 CH, 39 CH

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ATT -A.G+D.F [dB/m]	Ant. Pol. [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	48.03	0.00	2.99	H	51.02	73.98	22.96	PK
2390.0	35.26	0.40	2.99	H	38.65	53.98	15.33	AV
2390.0	47.78	0.00	2.99	V	50.77	73.98	23.21	PK
2390.0	35.19	0.40	2.99	V	38.58	53.98	15.40	AV
2483.5	49.72	0.00	4.20	H	53.92	73.98	20.06	PK
2483.5	35.33	0.40	4.20	H	39.93	53.98	14.05	AV
2483.5	49.54	0.00	4.20	V	53.74	73.98	20.24	PK
2483.5	35.18	0.40	4.20	V	39.78	53.98	14.20	AV

Mode : 1 MBit/s (37 Byte)

Operating Frequency 2402 MHz, 2480 MHz

Channel No. 0 CH, 39 CH

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ATT -A.G+D.F [dB/m]	Ant. Pol. [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	47.42	0.00	2.99	H	50.41	73.98	23.57	PK
2390.0	35.18	2.06	2.99	H	40.23	53.98	13.75	AV
2390.0	47.28	0.00	2.99	V	50.27	73.98	23.71	PK
2390.0	35.11	2.06	2.99	V	40.16	53.98	13.82	AV
2483.5	49.55	0.00	4.20	H	53.75	73.98	20.23	PK
2483.5	35.14	2.06	4.20	H	41.40	53.98	12.58	AV
2483.5	49.42	0.00	4.20	V	53.62	73.98	20.36	PK
2483.5	35.01	2.06	4.20	V	41.27	53.98	12.71	AV

Mode : 1 MBit/s (255 Byte)

Operating Frequency 2402 MHz, 2480 MHz

Channel No. 0 CH, 39 CH

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ATT -A.G+D.F [dB/m]	Ant. Pol. [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	47.50	0.00	2.99	H	50.49	73.98	23.49	PK
2390.0	35.29	0.70	2.99	H	38.98	53.98	15.00	AV
2390.0	47.13	0.00	2.99	V	50.12	73.98	23.86	PK
2390.0	35.20	0.70	2.99	V	38.89	53.98	15.09	AV
2483.5	48.58	0.00	4.20	H	52.78	73.98	21.20	PK
2483.5	35.28	0.70	4.20	H	40.18	53.98	13.80	AV
2483.5	48.12	0.00	4.20	V	52.32	73.98	21.66	PK
2483.5	34.96	0.70	4.20	V	39.86	53.98	14.12	AV

Mode : 2 MBit/s (37 Byte)

Operating Frequency 2402 MHz, 2480 MHz

Channel No. 0 CH, 39 CH

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ATT -A.G+D.F [dB/m]	Ant. Pol. [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	47.68	0.00	2.99	H	50.67	73.98	23.31	PK
2390.0	35.14	4.83	2.99	H	42.96	53.98	11.02	AV
2390.0	46.88	0.00	2.99	V	49.87	73.98	24.11	PK
2390.0	35.12	4.83	2.99	V	42.94	53.98	11.04	AV
2483.5	50.87	0.00	4.20	H	55.07	73.98	18.91	PK
2483.5	35.72	4.83	4.20	H	44.75	53.98	9.23	AV
2483.5	50.66	0.00	4.20	V	54.86	73.98	19.12	PK
2483.5	35.63	4.83	4.20	V	44.66	53.98	9.32	AV

Mode : 2 MBit/s (255 Byte)

Operating Frequency 2402 MHz, 2480 MHz

Channel No. 0 CH, 39 CH

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ATT -A.G+D.F [dB/m]	Ant. Pol. [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	47.24	0.00	2.99	H	50.23	73.98	23.75	PK
2390.0	35.22	2.40	2.99	H	40.61	53.98	13.37	AV
2390.0	46.67	0.00	2.99	V	49.66	73.98	24.32	PK
2390.0	35.18	2.40	2.99	V	40.57	53.98	13.41	AV
2483.5	50.62	0.00	4.20	H	54.82	73.98	19.16	PK
2483.5	36.19	2.40	4.20	H	42.79	53.98	11.19	AV
2483.5	50.27	0.00	4.20	V	54.47	73.98	19.51	PK
2483.5	35.99	2.40	4.20	V	42.59	53.98	11.39	AV

High Power

Mode : 1 MBit/s (37 Byte)

Operating Frequency 2402 MHz, 2480 MHz

Channel No. 0 CH, 39 CH

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ATT -A.G+D.F [dB/m]	Ant. Pol. [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	51.18	0.00	2.99	H	54.17	73.98	19.81	PK
2390.0	39.72	2.07	2.99	H	44.78	53.98	9.20	AV
2390.0	50.78	0.00	2.99	V	53.77	73.98	20.21	PK
2390.0	39.34	2.07	2.99	V	44.40	53.98	9.58	AV
2483.5	56.18	0.00	4.20	H	60.38	73.98	13.60	PK
2483.5	40.35	2.07	4.20	H	46.62	53.98	7.36	AV
2483.5	55.81	0.00	4.20	V	60.01	73.98	13.97	PK
2483.5	39.94	2.07	4.20	V	46.21	53.98	7.77	AV

Mode : 1 MBit/s (255 Byte)

Operating Frequency 2402 MHz, 2480 MHz

Channel No. 0 CH, 39 CH

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ATT -A.G+D.F [dB/m]	Ant. Pol. [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	50.76	0.00	2.99	H	53.75	73.98	20.23	PK
2390.0	39.93	0.69	2.99	H	43.61	53.98	10.37	AV
2390.0	50.32	0.00	2.99	V	53.31	73.98	20.67	PK
2390.0	39.65	0.69	2.99	V	43.33	53.98	10.65	AV
2483.5	55.56	0.00	4.20	H	59.76	73.98	14.22	PK
2483.5	40.50	0.69	4.20	H	45.39	53.98	8.59	AV
2483.5	55.24	0.00	4.20	V	59.44	73.98	14.54	PK
2483.5	40.11	0.69	4.20	V	45.00	53.98	8.98	AV

Mode : 2 MBit/s (37 Byte)

Operating Frequency 2402 MHz, 2480 MHz

Channel No. 0 CH, 39 CH

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ATT -A.G+D.F [dB/m]	Ant. Pol. [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	51.03	0.00	2.99	H	54.02	73.98	19.96	PK
2390.0	39.21	4.86	2.99	H	47.06	53.98	6.92	AV
2390.0	50.78	0.00	2.99	V	53.77	73.98	20.21	PK
2390.0	38.84	4.86	2.99	V	46.69	53.98	7.29	AV
2483.5	55.53	0.00	4.20	H	59.73	73.98	14.25	PK
2483.5	40.36	4.86	4.20	H	49.42	53.98	4.56	AV
2483.5	55.24	0.00	4.20	V	59.44	73.98	14.54	PK
2483.5	39.92	4.86	4.20	V	48.98	53.98	5.00	AV

Mode : 2 MBit/s (255 Byte)


Operating Frequency 2402 MHz, 2480 MHz

Channel No. 0 CH, 39 CH


Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L+ATT -A.G+D.F [dB/m]	Ant. Pol. [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	50.96	0.00	2.99	H	53.95	73.98	20.03	PK
2390.0	39.62	2.41	2.99	H	45.02	53.98	8.96	AV
2390.0	50.53	0.00	2.99	V	53.52	73.98	20.46	PK
2390.0	39.24	2.41	2.99	V	44.64	53.98	9.34	AV
2483.5	54.90	0.00	4.20	H	59.10	73.98	14.88	PK
2483.5	40.63	2.41	4.20	H	47.24	53.98	6.74	AV
2483.5	54.47	0.00	4.20	V	58.67	73.98	15.31	PK
2483.5	40.18	2.41	4.20	V	46.79	53.98	7.19	AV

Mode : 2 MBit/s (37 Byte) Test Plots _Normal

Radiated Restricted Band Edges plot – Average Result (Ch.39, X-H)

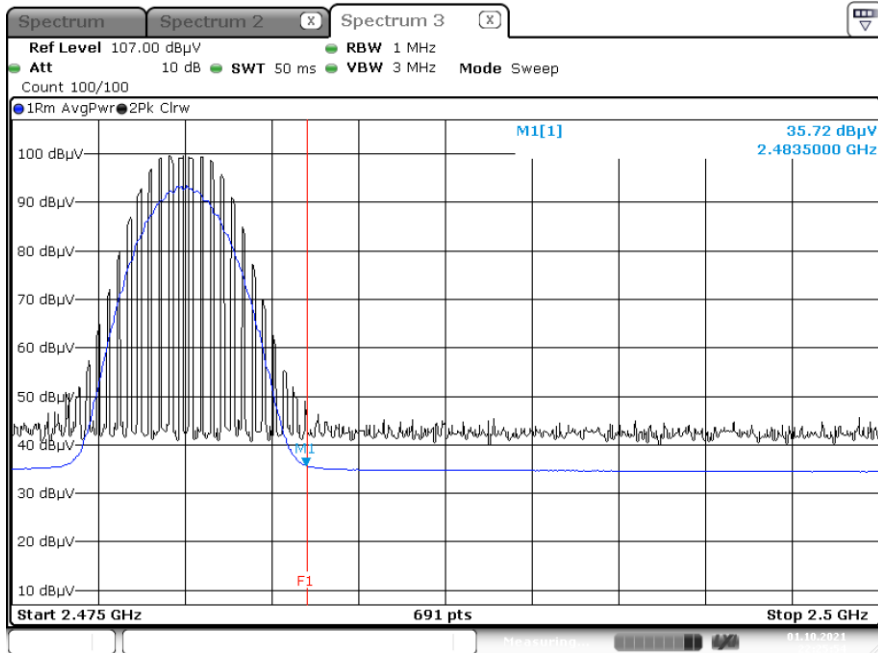


Radiated Restricted Band Edges plot – Peak Result (Ch.39, X-H)

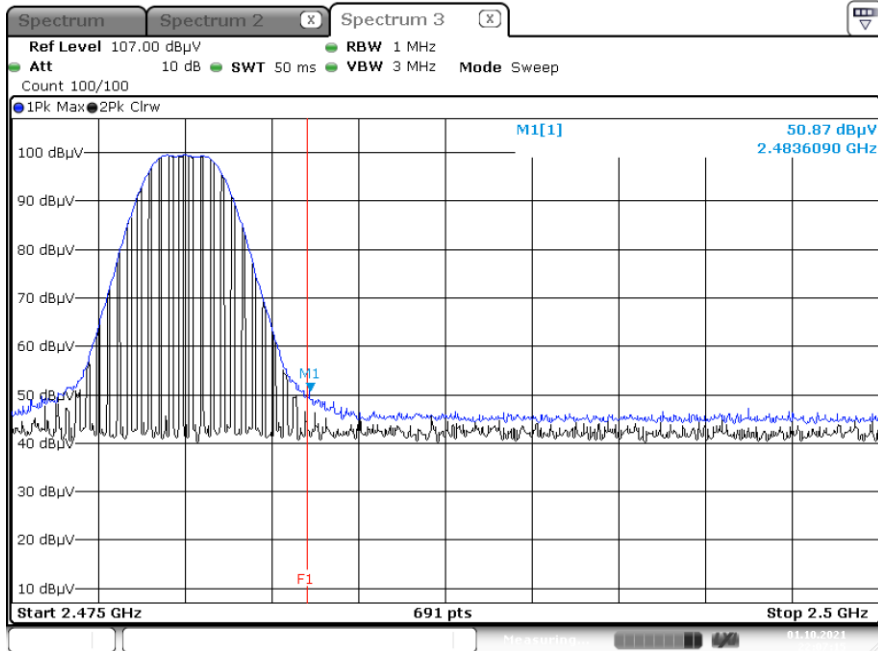


Mode : 2 MBit/s (37 Byte) Test Plots_High Power

Radiated Restricted Band Edges plot – Average Result (Ch.39, X-H)

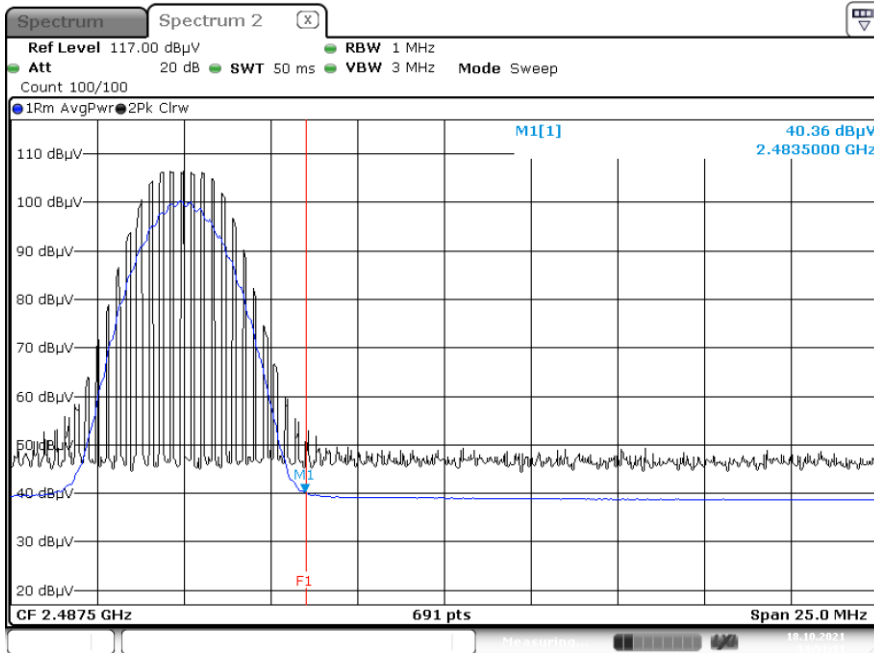

Radiated Restricted Band Edges plot – Peak Result (Ch.39, X-H)

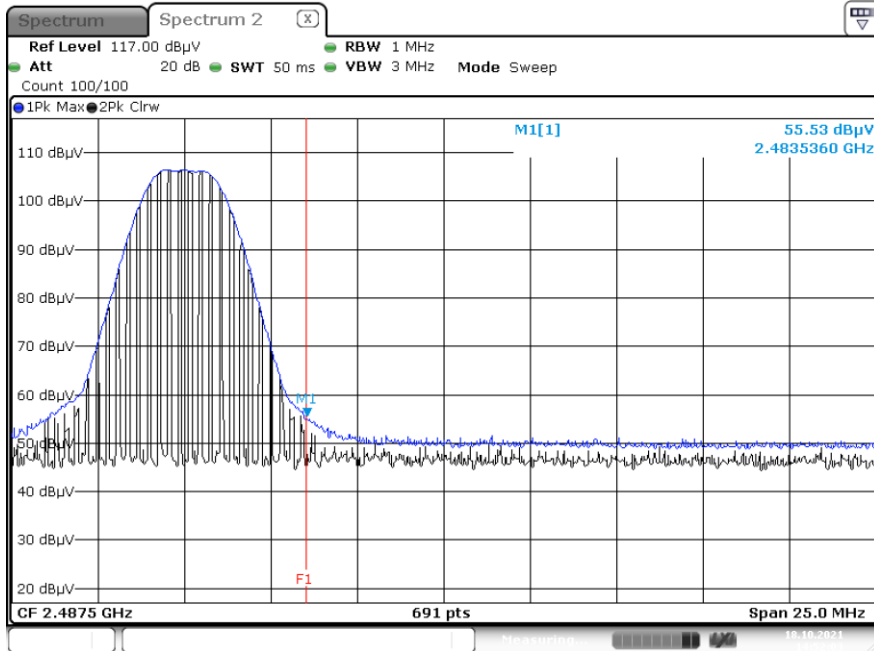

Note:

Plot of worst case are only reported.

9.8 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions (Line 1)

BTLE MODE_L1


1 / 2

Test Report

Common Information

EUT : SM-S901B/DS
 Manufacturer : SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions : BTLE MODE_L1

Full Spectrum

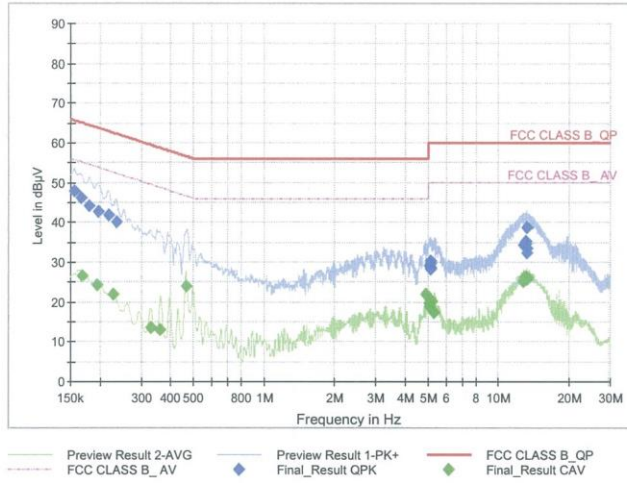

Final Result QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	47.84	65.75	17.91	9.000	L1	OFF	9.6
0.1658	46.20	65.17	18.97	9.000	L1	OFF	9.6
0.1793	44.16	64.52	20.36	9.000	L1	OFF	9.6
0.1973	42.67	63.73	21.05	9.000	L1	OFF	9.6
0.2175	41.71	62.91	21.21	9.000	L1	OFF	9.6
0.2355	40.18	62.25	22.07	9.000	L1	OFF	9.6
5.0968	29.13	60.00	30.87	9.000	L1	OFF	9.9
5.1058	28.37	60.00	31.63	9.000	L1	OFF	9.9
5.1125	30.29	60.00	29.71	9.000	L1	OFF	9.9
5.1170	30.34	60.00	29.66	9.000	L1	OFF	9.9
5.1350	29.58	60.00	30.42	9.000	L1	OFF	9.9
5.1530	28.48	60.00	31.52	9.000	L1	OFF	9.9
12.7603	34.30	60.00	25.70	9.000	L1	OFF	10.2
12.9920	35.20	60.00	24.80	9.000	L1	OFF	10.2
13.0078	34.69	60.00	25.31	9.000	L1	OFF	10.2
13.1765	38.67	60.00	21.33	9.000	L1	OFF	10.2
13.2238	32.20	60.00	27.80	9.000	L1	OFF	10.2
13.2575	33.58	60.00	26.42	9.000	L1	OFF	10.2

2021-09-30

오후 11:35:21

BTLE MODE_L1

2 / 2

Final Result CAV

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1680	26.46	55.06	28.60	9.000	L1	OFF	9.6
0.1950	24.28	53.82	29.54	9.000	L1	OFF	9.6
0.2265	21.96	52.58	30.61	9.000	L1	OFF	9.6
0.3300	13.42	49.45	36.03	9.000	L1	OFF	9.6
0.3615	13.02	48.69	35.67	9.000	L1	OFF	9.6
0.4650	23.95	46.60	22.65	9.000	L1	OFF	9.6
4.9010	21.95	46.00	24.05	9.000	L1	OFF	9.9
5.0675	18.74	50.00	31.26	9.000	L1	OFF	9.9
5.0990	19.69	50.00	30.31	9.000	L1	OFF	9.9
5.1328	20.43	50.00	29.57	9.000	L1	OFF	9.9
5.1665	20.28	50.00	29.72	9.000	L1	OFF	9.9
5.2948	17.23	50.00	32.77	9.000	L1	OFF	9.9
12.7220	25.26	50.00	24.74	9.000	L1	OFF	10.2
12.7580	25.22	50.00	24.78	9.000	L1	OFF	10.2
12.9560	26.25	50.00	23.75	9.000	L1	OFF	10.2
13.1855	26.33	50.00	23.67	9.000	L1	OFF	10.2
13.2215	25.61	50.00	24.39	9.000	L1	OFF	10.2
13.2553	25.92	50.00	24.08	9.000	L1	OFF	10.2

2021-09-30

오후 11:35:21

Conducted Emissions (Line 2)

BTLE MODE_N


1 / 2

Test Report

Common Information

EUT : SM-S901B/DS
 Manufacturer : SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions : BTLE MODE_N

Full Spectrum

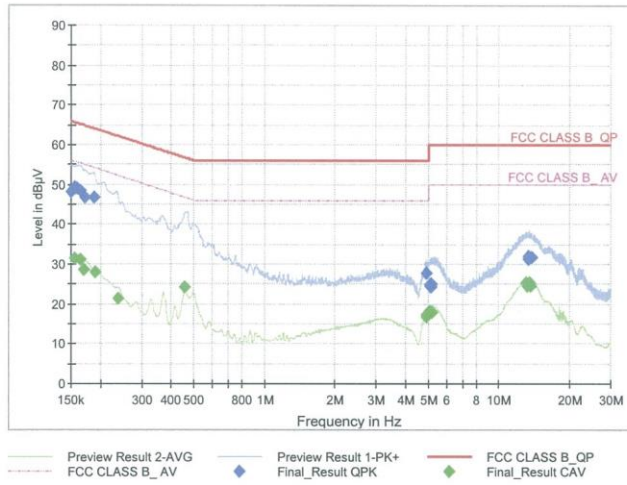

Final Result QPK

Frequency (MHz)	QuasiPeak (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1500	48.23	66.00	17.77	9.000	N	OFF	9.6
0.1545	49.43	65.75	16.32	9.000	N	OFF	9.6
0.1590	48.94	65.52	16.58	9.000	N	OFF	9.6
0.1635	48.60	65.28	16.69	9.000	N	OFF	9.6
0.1725	46.78	64.84	18.06	9.000	N	OFF	9.6
0.1883	46.74	64.11	17.38	9.000	N	OFF	9.6
4.9213	27.59	56.00	28.41	9.000	N	OFF	9.9
5.0743	24.83	60.00	35.17	9.000	N	OFF	9.9
5.0788	24.54	60.00	35.46	9.000	N	OFF	9.9
5.1013	24.71	60.00	35.29	9.000	N	OFF	9.9
5.1170	25.04	60.00	34.96	9.000	N	OFF	9.9
5.1283	24.27	60.00	35.73	9.000	N	OFF	9.9
13.2800	31.93	60.00	28.07	9.000	N	OFF	10.2
13.3475	31.45	60.00	28.55	9.000	N	OFF	10.2
13.3948	31.22	60.00	28.78	9.000	N	OFF	10.2
13.5073	31.54	60.00	28.46	9.000	N	OFF	10.2
13.5500	31.79	60.00	28.21	9.000	N	OFF	10.2
13.7323	31.87	60.00	28.13	9.000	N	OFF	10.2

2021-09-30

오후 11:30:06

BTLE MODE_N

2 / 2

Final Result CAV

Frequency (MHz)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	31.41	55.75	24.35	9.000	N	OFF	9.6
0.1635	31.10	55.28	24.18	9.000	N	OFF	9.6
0.1703	28.59	54.95	26.36	9.000	N	OFF	9.6
0.1905	28.00	54.02	26.02	9.000	N	OFF	9.6
0.2378	21.44	52.17	30.73	9.000	N	OFF	9.6
0.4583	24.10	46.72	22.63	9.000	N	OFF	9.6
4.8785	17.32	46.00	28.68	9.000	N	OFF	9.9
4.9235	16.64	46.00	29.36	9.000	N	OFF	9.9
5.0383	18.00	50.00	32.00	9.000	N	OFF	9.9
5.0473	18.05	50.00	31.95	9.000	N	OFF	9.9
5.0945	18.14	50.00	31.86	9.000	N	OFF	9.9
5.1688	17.92	50.00	32.08	9.000	N	OFF	9.9
13.0078	25.34	50.00	24.66	9.000	N	OFF	10.2
13.2530	24.47	50.00	25.53	9.000	N	OFF	10.2
13.4623	24.83	50.00	25.17	9.000	N	OFF	10.2
13.5073	25.34	50.00	24.66	9.000	N	OFF	10.2
13.5523	24.75	50.00	25.25	9.000	N	OFF	10.2
13.5770	24.52	50.00	25.48	9.000	N	OFF	10.2

2021-09-30

오후 11:30:06

10. LIST OF TEST EQUIPMENT

Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/23/2022	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	06/17/2022	Annual
Temperature Chamber	SU-642	ESPEC	0093008124	03/15/2022	Annual
Signal Analyzer	N9030A	Agilent	MY49432108	03/09/2022	Annual
Power Meter	N1911A	Agilent	MY45100523	04/08/2022	Annual
Power Sensor	N1921A	Agilent	MY57820067	04/08/2022	Annual
Power Splitter	11667B	Hewlett Packard	10545	02/09/2022	Annual
DC Power Supply	E3632A	HP	MY50360067	02/26/2022	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C	HP	07560	06/18/2022	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C	HP	08285	06/28/2022	Annual
Attenuator(20 dB)	18N-20dB	Rohde & Schwarz	8	03/08/2022	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	N/A	N/A	N/A
Controller	EM1000	Audix	060520	N/A	N/A
Turn Table	N/A	Audix	N/A	N/A	N/A
Amp & Filter Bank Switch Controller	FBSM-01B	TNM system	TM19050002	N/A	N/A
Loop Antenna	1513	Schwarzbeck	1513-333	03/19/2022	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	09/04/2022	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	02296	05/19/2022	Biennial
Horn Antenna(15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170124	04/12/2023	Biennial
Spectrum Analyzer	FSV(10 Hz ~ 40 GHz)	Rohde & Schwarz	101055	05/14/2022	Annual
Band Reject Filter	WRCJV2400/2483.5-2370/2520-60/12SS	Wainwright Instruments	2	01/06/2022	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	5	06/24/2022	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	6	06/24/2022	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/04/2021	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/23/2022	Annual
HPF(3~18GHz) LNA1(1~18GHz)	FMSR-05B	TNM system	F6	01/20/2022	Annual
ATT(10dB) + LNA1(1~18GHz)	FMSR -05B	TNM system	None	01/20/2022	Annual
ATT(3dB) + LNA1(1~18GHz)	FMSR -05B	TNM system	None	01/20/2022	Annual
LNA1(1~18GHz)	FMSR -05B	TNM system	25540	01/20/2022	Annual
HPF(7~18GHz) LNA2(6~18GHz)	FMSR -05B	TNM system	28550	01/20/2022	Annual
Thru(30MHz ~ 18GHz)	FMSR -05B	TNM system	None	01/20/2022	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2110-FC025-P