



Part 96 MEASUREMENT REPORT NR Band n48

Applicant Name:

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022

Test Report Issue Date:

07/06/2022

Test Site/Location:

PCTEST Lab. Columbia, MD, USA

Test Report Serial No.:

1M2112090150-05.A3L

FCC ID:	A3LSMS901U
APPLICANT:	Samsung Electronics Co., Ltd.

Application Type:

Certification

Model:

SM-S901U

Additional Models:

SM-S901U1

EUT Type:

Portable Handset

FCC Classification:

Citizens Band End User Devices (CBE)

FCC Rule Part(s):

96

Test Procedure(s):

ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01, KDB 940660 D01 v03, WINNF-18-IN-00178 v1.0.0.00, KDB 648474 D03 v01r04

Class II Permissive Change:


Please see FCC change document

Original Grant Date:

12/07/2021

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President








FCC ID: A3LSMS901U	 PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset	Page 1 of 53

TABLE OF CONTENTS


1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration	5
2.4	Software and Firmware	5
2.5	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Measurement Procedure.....	6
3.2	Radiated Power and Radiated Spurious Emissions	6
4.0	MEASUREMENT UNCERTAINTY	7
5.0	TEST EQUIPMENT CALIBRATION DATA	8
6.0	SAMPLE CALCULATIONS	10
7.0	TEST RESULTS	11
7.1	Summary.....	11
7.2	Conducted Power Output Data	12
7.3	Occupied Bandwidth	15
7.4	Spurious and Harmonic Emissions at Antenna Terminal	22
7.5	Band Edge Emissions at Antenna Terminal	29
7.6	Radiated Power (EIRP)	36
7.7	Radiated Spurious Emissions Measurements.....	39
7.8	Frequency Stability / Temperature Variation	48
7.9	End User Device Additional Requirement (CBSD Protocol).....	50
8.0	CONCLUSION.....	53

FCC ID: A3LSMS901U	 PCTEST® <small>Proud to be part of element</small>	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset	Page 2 of 53	



MEASUREMENT REPORT



FCC Part 96



Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
NR Band n48	40 MHz	$\pi/2$ BPSK	3570.0-3680.0	0.093	19.68	35M9G7D
		QPSK	3570.0-3680.0	0.094	19.75	37M9G7D
		16QAM	3570.0-3680.0	0.073	18.62	38M0W7D
	30 MHz	$\pi/2$ BPSK	3565.0-3685.0	0.096	19.83	27M1G7D
		QPSK	3565.0-3685.0	0.097	19.85	28M0G7D
		16QAM	3565.0-3685.0	0.079	18.97	28M0W7D
	20 MHz	$\pi/2$ BPSK	3560.0 -3690.0	0.081	19.06	18M0G7D
		QPSK	3560.0 -3690.0	0.085	19.27	18M0G7D
		16QAM	3560.0 -3690.0	0.082	19.15	18M0W7D
	10 MHz	$\pi/2$ BPSK	3555.0-3695.0	0.088	19.47	8M73G7D
		QPSK	3555.0-3695.0	0.089	19.51	8M74G7D
		16QAM	3555.0-3695.0	0.089	19.48	8M72W7D

EUT Overview

Note: EIRP levels shown in the table above are measured over the full channel bandwidth. These values will appear on the Grant of Authorization.

FCC ID: A3LSMS901U	 PCTEST [®] Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset	Page 3 of 53	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.



1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Columbia, MD 21046, U.S.A.

- PCTEST is a OnGo Alliance Approved Test Lab (ATL)
- PCTEST is a WinnForum Approved Test Lab
- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for CBRS Alliance Certification Test Plan and WinnForum Conformance and Performance Test Technical Standard.
- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: A3LSMS901U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset	Page 4 of 53	

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID:A3LSMS901U**. The test data contained in this report pertains only to the emissions due to the EUT's NR Band 48 operation in the CBRS band. Per FCC Part 96, this device is evaluated under Citizens Band End User Devices (CBE).

Test Device Serial No.: 0291M, 2091M, 0277M, 0910M, 0301M, 2651M, 2575M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR (FR1 and FR2), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer

This device uses a tuner circuit that dynamically updates the antenna impedance parameters to optimize antenna performance for certain bands and modes of operation. The tuner for this device was set to simulate a "free space" condition where the transmit antenna is matched to the medium into which it is transmitting and, thus, the power is at its maximum level.

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.




This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.4 Software and Firmware

Testing was performed on samples using firmware version S901USQU0AUJ5 loaded on the EUT's.

2.5 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMS901U	 Proud to be part of 	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset	Page 5 of 53	

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI/TIA-603-E-2016. A half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [dBm] = P_g [dBm] - \text{cable loss} [dB] + \text{antenna gain} [dBd/dBi];$$

where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g [dBm] - \text{cable loss} [dB]$.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:



$$E_{[dB\mu V/m]} = \text{Measured amplitude level}_{[dBm]} + 107 + \text{Cable Loss}_{[dB]} + \text{Antenna Factor}_{[dB/m]}$$

And

$$\text{EIRP}_{[dBm]} = E_{[dB\mu V/m]} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01.




Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015.

FCC ID: A3LSMS901U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset	Page 6 of 53	

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMS901U	 PCTEST Proud to be part of  element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 7 of 53

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AP2	EMC Cable and Switch System	3/4/2021	Annual	3/4/2022	AP2
-	AP1	EMC Cable and Switch System	3/9/2021	Annual	3/9/2022	AP1
-	ETS	EMC Cable and Switch System	3/4/2021	Annual	3/4/2022	ETS
-	LTx1	Licensed Transmitter Cable Set	3/12/2021	Annual	3/12/2022	LTx1
-	LTx2	Licensed Transmitter Cable Set	3/12/2021	Annual	3/12/2022	LTx2
Agilent	N9030A	50GHz PXA Signal Analyzer	1/20/2021	Annual	1/20/2022	US51350301
Anritsu	MT8821C	Radio Communication Analyzer	N/A			6201381794
Emco	3115	Horn Antenna (1-18GHz)	6/18/2020	Biennial	6/18/2022	9704-5182
Espec	ESX-2CA	Environmental Chamber	8/27/2020	Annual	8/27/2022	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	4/20/2021	Biennial	4/20/2023	00125518
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	3/12/2020	Biennial	3/12/2022	128337
Keysight Technologies	N9020A	MXA Signal Analyzer	12/22/2020	Annual	12/22/2021	MY54500644
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	7/21/2021	Annual	7/21/2022	MY49430494
Keysight Technologies	N9038A	MXE EMI Receiver	12/11/2021	Annual	12/11/2022	MY49430494
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11208010032
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			100976
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	8/3/2021	Annual	8/3/2022	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	4/30/2021	Annual	4/30/2022	100348
Rohde & Schwarz	ESW44	EMI Test Receiver 2Hz to 44 GHz	1/21/2021	Annual	1/21/2022	101716
Rohde & Schwarz	FSW26	2Hz-26.5GHz Signal and Spectrum Analyzer	2/10/2021	Annual	2/10/2022	103187
Sunol	JB6	LB6 Antenna	11/13/2020	Biennial	11/13/2022	A082816



Table 5-1. Test Equipment (09/20/2021 - 11/05/2021)

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Keysight Technologies	N9020A	PXA Signal Analyzer	3/4/2022	Annual	3/4/2023	US46470561

Table 5-2. Test Equipment (06/09/2022)



Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AP2	EMC Cable and Switch System	1/4/2022	Annual	1/4/2023	AP2
-	LTx4	Licensed Transmitter Cable Set	12/19/2021	Annual	12/19/2022	LTx4
-	LTx5	Licensed Transmitter Cable Set	12/19/2021	Annual	12/19/2022	LTx5
Emco	3115	Horn Antenna (1-18GHz)	6/18/2020	Biennial	6/18/2022	9704-5182
Emco	3116	Horn Antenna (18 - 40GHz)	7/20/2021	Biennial	7/20/2023	9203-2178
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	7/21/2021	Annual	7/21/2022	MY49430494
Keysight Technologies	N9030B	PXA Signal Analyzer, Multi-touch	1/7/2022	Annual	1/7/2023	MY57141001
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	8/3/2021	Annual	8/3/2022	100342
Rohde & Schwarz	ESW44	EMI Test Receiver 2Hz to 44 GHz	3/28/2022	Annual	3/28/2023	101716

Table 5-3. Test Equipment (06/22/2022-06/29/2022)

FCC ID: A3LSMS901U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset	Page 8 of 53	

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMS901U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 9 of 53

6.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated




7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (7250 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm $-$ (-24.80).

FCC ID: A3LSMS901U	 PCTEST Proud to be part of 	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 10 of 53

7.0 TEST RESULTS

7.1 Summary



Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMS901U
 FCC Classification: Citizens Band End User Devices (CBE)
 Mode(s): NR

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Conducted Power	2.1046	N/A	PASS	Section 7.2
	Occupied Bandwidth	2.1049	N/A	PASS	Section 7.3
	Conducted Band Edge / Spurious Emissions	2.1051, 96.41(e)(ii)	-13 dBm/MHz at frequencies within 0-B MHz of channel edge (where B is the bandwidth of the assigned channel) -25 dBm/MHz at frequencies greater than B MHz above and below channel edge -40 dBm/MHz at frequencies below 3530 MHz and above 3720 MHz	PASS	Sections 7.4, 7.5
	Additional Maximum Power Reduction (A-MPR)	2.1046	N/A	PASS	Section 7.2
	Frequency Stability	2.1055	Fundamental emissions stay within authorized frequency block	PASS	Section 7.8
	End User Device Additional Requirements (CBSD Protocol)	96.47	End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation. An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.	PASS	Section 7.9
	Uplink Carrier Aggregation	96.41(e)	> 43 + 10log(P[Watts]) at Band Edge and for all out-of-band emissions	PASS	Sections 7.2 - 7.4
RADIATED	Equivalent Isotropic Radiated Power (EIRP)	96.41(b)	23 dBm/10MHz	PASS	Section 7.6
	Radiated Spurious Emissions	2.1053, 96.41(e)	-40 dBm/MHz	PASS	Section 7.8
	Uplink Carrier Aggregation	96.41(e)	> 43 + 10log(P[Watts]) at Band Edge and for all out-of-band emissions	PASS	Sections 7.7

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST EMC Software Tool v1.0, Chamber Control v1.3.1.

FCC ID: A3LSMS901U	 PCTEST [®] Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 11 of 53

7.2 Conducted Power Output Data

Test Overview

The EUT is set up to transmit at maximum power for LTE. All power levels are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Span = 2 x OBW to 3 x OBW
2. RBW = 1% to 5% of the OBW
3. Number of measurement points in sweep $\geq 2 \times \text{span} / \text{RBW}$
4. Sweep = auto-couple (less than transmission burst duration)
5. Detector = RMS (power)
6. Trigger was set to enable power measurements only on full power bursts
7. Trace was allowed to stabilize
8. Spectrum analyzer's "Channel Power" function was used to compute the power by integrating the spectrum across the OBW of the signal

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.






Figure 7-1. Test Instrument & Measurement Setup



Test Notes

1. Conducted power measurements were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth. Channel bandwidth data is shown in the tables below based only on the channel bandwidths that were supported in this device.
2. Conducted power measurements are also evaluated for simultaneous transmission of the n48 carrier plus a supported LTE anchor band (EN-DC). The powers were investigated while both bands are operating at their widest supported channel bandwidth.
3. All other conducted power measurements are contained in the RF exposure report for this filing.

FCC ID: A3LSMS901U	 PCTEST [®] Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset	Page 12 of 53	

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
40 MHz	π/2 BPSK	638000	3570.0	1 / 53	22.17
		641666	3625.0	1 / 53	21.87
		645332	3680.0	1 / 26	21.74
	QPSK	638000	3570.0	1 / 53	22.24
		641666	3625.0	1 / 53	21.91
		645332	3680.0	1 / 26	21.66
	16-QAM	638000	3570.0	1 / 79	20.72
		641666	3625.0	1 / 53	19.80
		645332	3680.0	1 / 26	19.82
	64-QAM	638000	3570.0	1 / 79	19.28
		641666	3625.0	1 / 26	19.44
		645332	3680.0	1 / 26	19.19
256-QAM	638000	3570.0	1 / 79	19.03	
	641666	3625.0	1 / 26	18.79	
	645332	3680.0	1 / 26	18.59	
30 MHz	π/2 BPSK	637666	3565.0	1 / 20	22.32
		641666	3625.0	1 / 19	22.00
		645666	3685.0	1 / 19	21.92
	QPSK	637666	3565.0	1 / 58	22.34
		641666	3625.0	1 / 19	21.91
		645666	3685.0	1 / 19	21.92
	16-QAM	637666	3565.0	1 / 58	20.94
		641666	3625.0	1 / 19	20.50
		645666	3685.0	1 / 19	20.17
	64-QAM	637666	3565.0	1 / 58	20.31
		641666	3625.0	1 / 58	19.69
		645666	3685.0	1 / 58	19.62
256-QAM	637666	3565.0	1 / 58	19.32	
	641666	3625.0	1 / 58	18.83	
	645666	3685.0	1 / 58	18.67	
20 MHz	π/2 BPSK	637334	3560.0	1 / 37	21.55
		641666	3625.0	1 / 37	22.21
		646000	3690.0	1 / 37	21.77
	QPSK	637334	3560.0	1 / 37	21.51
		641666	3625.0	1 / 37	22.05
		646000	3690.0	1 / 37	21.97
	16-QAM	637334	3560.0	1 / 37	21.24
		641666	3625.0	1 / 37	19.82
		646000	3690.0	1 / 37	19.56
	64-QAM	637334	3560.0	1 / 38	20.87
		641666	3625.0	1 / 38	19.27
		646000	3690.0	1 / 13	19.36
256-QAM	637334	3560.0	1 / 38	18.66	
	641666	3625.0	1 / 38	18.83	
	646000	3690.0	1 / 13	18.60	
10 MHz	π/2 BPSK	637000	3555.0	1 / 17	21.96
		641666	3625.0	1 / 17	21.93
		646332	3695.0	1 / 6	21.64
	QPSK	637000	3555.0	1 / 17	22.00
		641666	3625.0	1 / 17	21.81
		646332	3695.0	1 / 6	21.68
	16-QAM	637000	3555.0	1 / 17	21.57
		641666	3625.0	1 / 17	20.16
		646332	3695.0	1 / 6	19.10
	64-QAM	637000	3555.0	1 / 17	20.86
		641666	3625.0	1 / 17	18.98
		646332	3695.0	1 / 6	18.84
256-QAM	637000	3555.0	1 / 17	18.61	
	641666	3625.0	1 / 17	18.23	
	646332	3695.0	1 / 6	18.35	

Table 7-2. Conducted Power Output Data (NR Band n48)

FCC ID: A3LSMS901U	 PCTEST® Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 13 of 53

NR							LTE Band							NR Conducted Power [dBm]	LTE Conducted Power [dBm]	EN-DC Total Tx. Power (dBm)
NR Band	NR Bandwidth [MHz]	NR (UL) channel	NR (UL) Frequency	NR (UL) channel	Mod.	NR UL RB#/Offset	LTE Band	LTE Bandwidth [MHz]	LTE (UL) channel	LTE (UL) Frequency	LTE (UL) channel	Mod.	LTE UL RB#/Offset			
n48	40	Mid	3625	641666	$\pi/2$ BPSK	1/26	B66	20	Mid	1745	132322 (66786)	QPSK	1/0	23.98	23.43	26.72
					QPSK	100/0						22.20	22.31	25.27		
					QPSK	1/26						23.42	23.37	26.41		
					QPSK	1/53						23.49	22.93	26.23		
					QPSK	1/79						23.45	22.58	26.05		
					16Q	1/26						23.28	22.10	25.74		

Table 7-3. Conducted Power Output Data (EN-DC, n48 – B66)

NR							LTE Band							NR Conducted Power [dBm]	LTE Conducted Power [dBm]	EN-DC Total Tx. Power (dBm)
NR Band	NR Bandwidth [MHz]	NR (UL) channel	NR (UL) Frequency	NR (UL) channel	Mod.	NR UL RB#/Offset	LTE Band	LTE Bandwidth [MHz]	LTE (UL) channel	LTE (UL) Frequency	LTE (UL) channel	Mod.	LTE UL RB#/Offset			
n48	40	Mid	3625	641666	$\pi/2$ BPSK	1/26	B2	20	Mid	1880	18900 (900)	QPSK	1/0	23.79	23.07	26.46
					QPSK	100/0						22.71	22.13	25.44		
					QPSK	1/26						23.69	22.97	26.36		
					QPSK	1/53						23.34	23.15	26.26		
					QPSK	1/79						23.19	23.27	26.24		
					16Q	1/26						23.18	21.93	25.61		



Table 7-4. Conducted Power Output Data (EN-DC, n48 – B2)

PCC						SCC						PCC Conducted Power [dBm]	SCC Conducted Power [dBm]	Inter-Band ULCA Total Tx. Power [dBm]
PCC Band	PCC Bandwidth [MHz]	PCC Channel	PCC Frequency [MHz]	Mod.	PCC RB#/Offset	SCC Band	SCC Bandwidth [MHz]	SCC Channel	SCC Frequency [MHz]	Mod.	SCC RB#/Offset			
n5	20	Mid	836.5	$\pi/2$ BPSK	1 / 53	n48	40	Mid	3625	$\pi/2$ BPSK	1 / 53	21.24	20.59	23.94
				QPSK	100 / 0					21.07	20.57	23.84		
				QPSK	1 / 26					21.12	20.78	23.96		
				QPSK	1 / 53					21.43	20.65	24.07		
				QPSK	1 / 79					21.14	20.39	23.79		
				16Q	1/53					21.36	20.39	23.91		

Table 7-5. Conducted Power Output Data (NR CA, n48 – B5)

PCC						SCC						PCC Conducted Power [dBm]	SCC Conducted Power [dBm]	Inter-Band ULCA Total Tx. Power [dBm]
PCC Band	PCC Bandwidth [MHz]	PCC Channel	PCC Frequency [MHz]	Mod.	PCC RB#/Offset	SCC Band	SCC Bandwidth [MHz]	SCC Channel	SCC Frequency [MHz]	Mod.	SCC RB#/Offset			
n5	20	Mid	836.5	$\pi/2$ BPSK	1 / 53	n48	40	Mid	3625	$\pi/2$ BPSK	1 / 53	21.24	20.59	23.94
				QPSK	100 / 0					21.07	20.57	23.84		
				QPSK	1 / 26					21.12	20.78	23.96		
				QPSK	1 / 53					21.43	20.65	24.07		
				QPSK	1 / 79					21.14	20.39	23.79		
				16Q	1/53					21.36	20.39	23.91		

Table 7-6. Conducted Power Output Data (NR CA, n48 – B2)

FCC ID: A3LSMS901U	 PCTEST® Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 14 of 53

7.3 Occupied Bandwidth

\$2.1049

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer’s automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW ≥ 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup



The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-2. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: A3LSMS901U	 PCTEST [®] Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 15 of 53

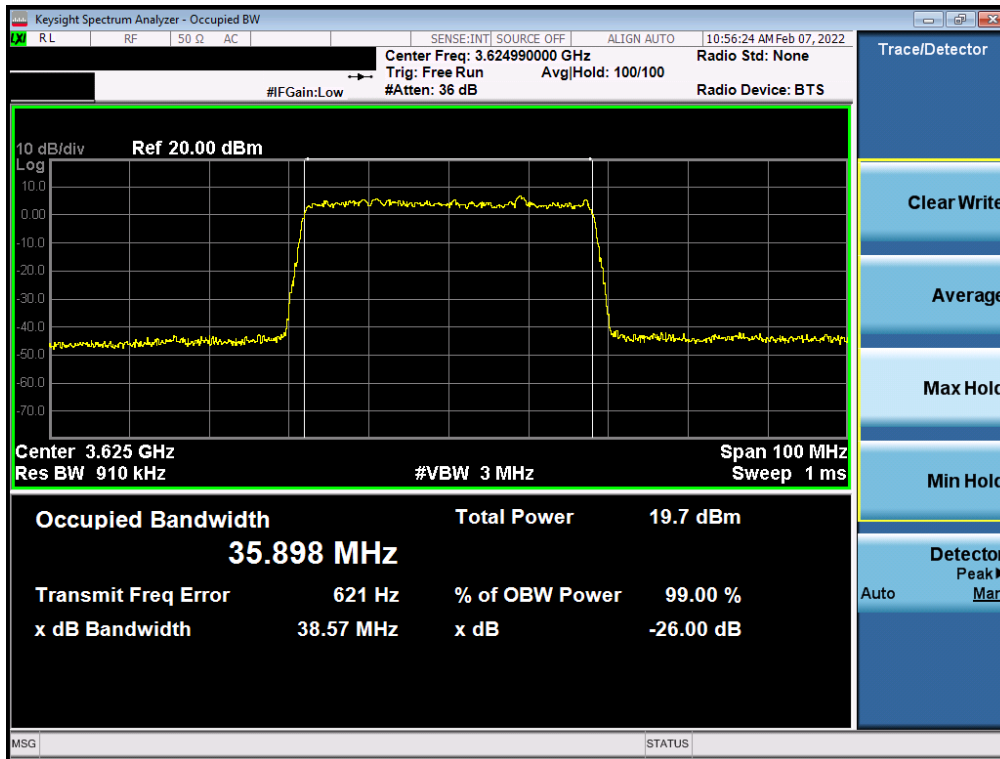

NR Band n48

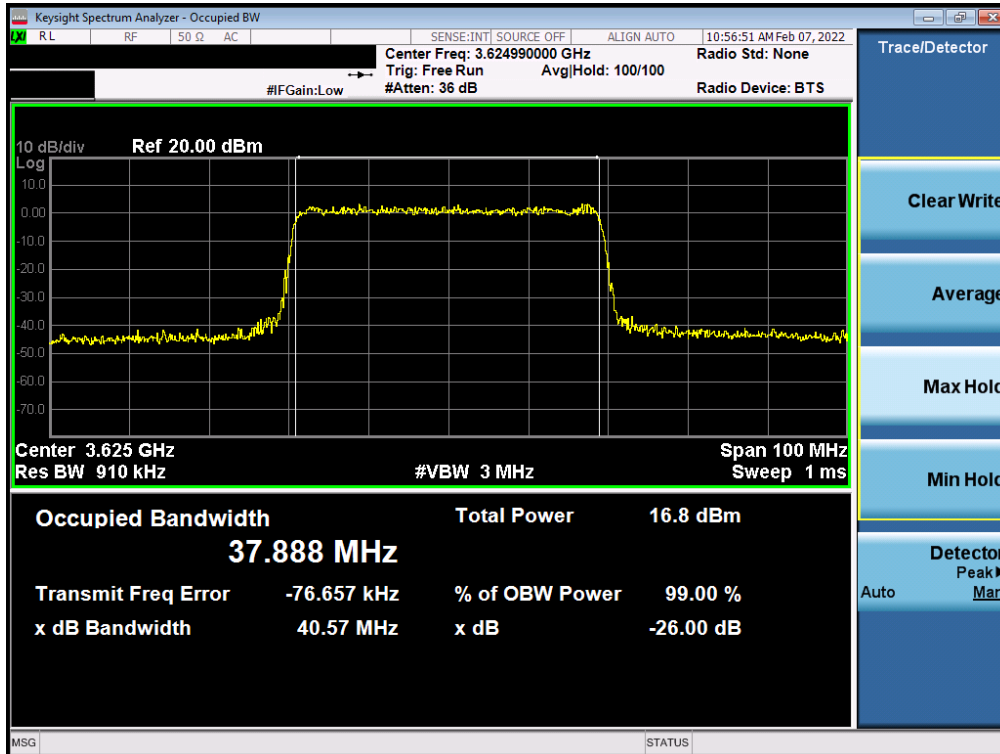


Plot 7-1. Occupied Bandwidth Plot (NR Band n48 - 40MHz $\pi/2$ BPSK - Full RB Configuration)




Plot 7-2. Occupied Bandwidth Plot (NR Band n48 - 40MHz QPSK - Full RB Configuration)

FCC ID: A3LSMS901U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 16 of 53

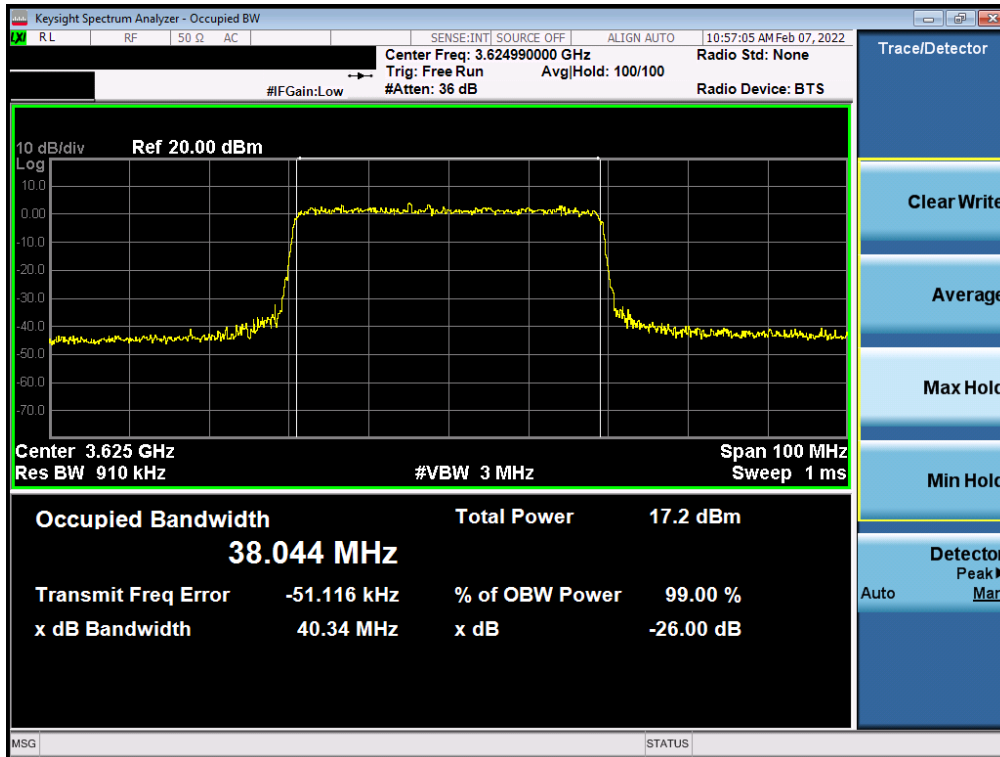


Plot 7-3. Occupied Bandwidth Plot (NR Band n48 - 40MHz 16-QAM - Full RB Configuration)

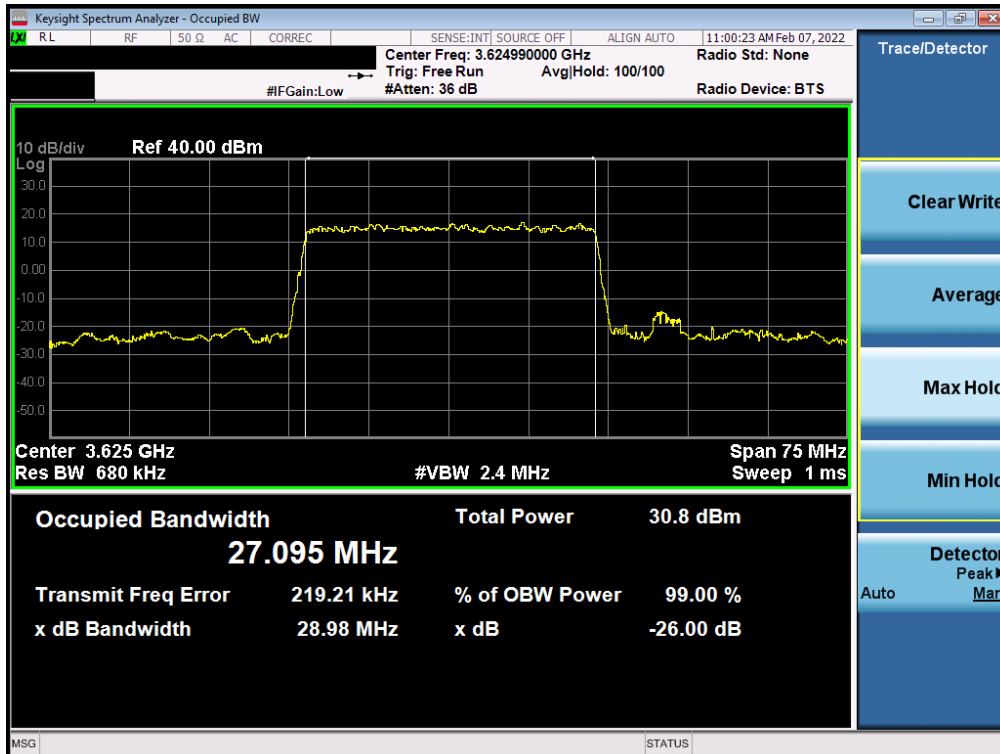


Plot 7-4. Occupied Bandwidth Plot (NR Band n48 - 30MHz $\pi/2$ BPSK - Full RB Configuration)

FCC ID: A3LSMS901U	Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 17 of 53

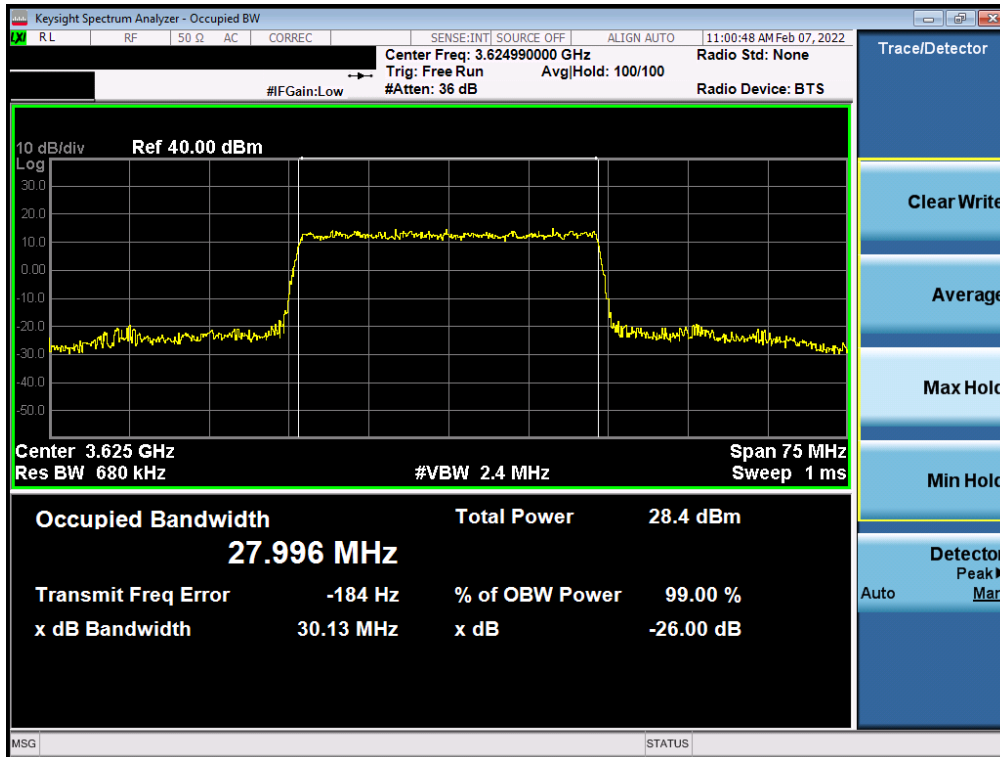


Plot 7-5. Occupied Bandwidth Plot (NR Band n48 - 30MHz QPSK - Full RB Configuration)

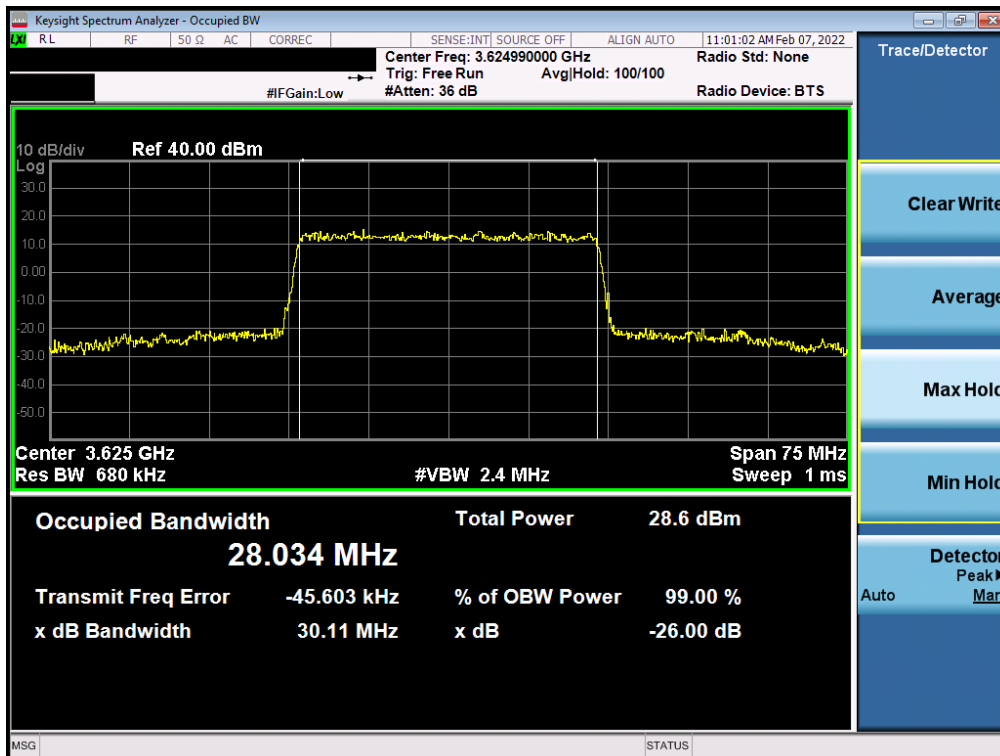


Plot 7-6. Occupied Bandwidth Plot (NR Band n48 - 30MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMS901U	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 18 of 53

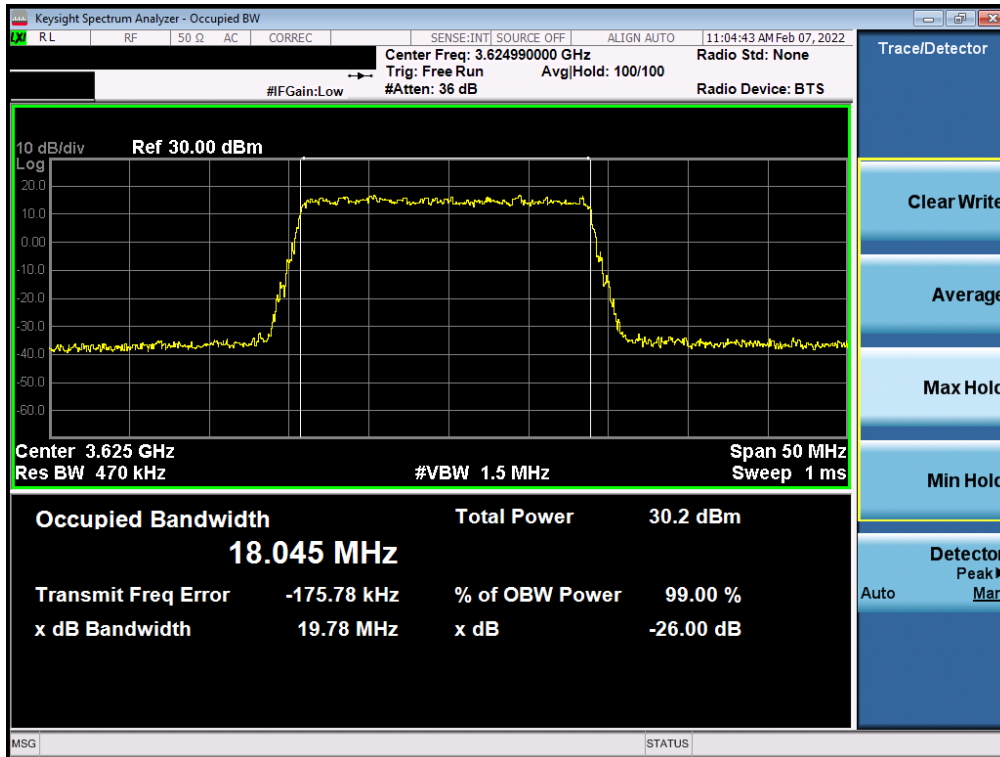


Plot 7-7. Occupied Bandwidth Plot (NR Band n48 - 20MHz $\pi/2$ BPSK - Full RB Configuration)

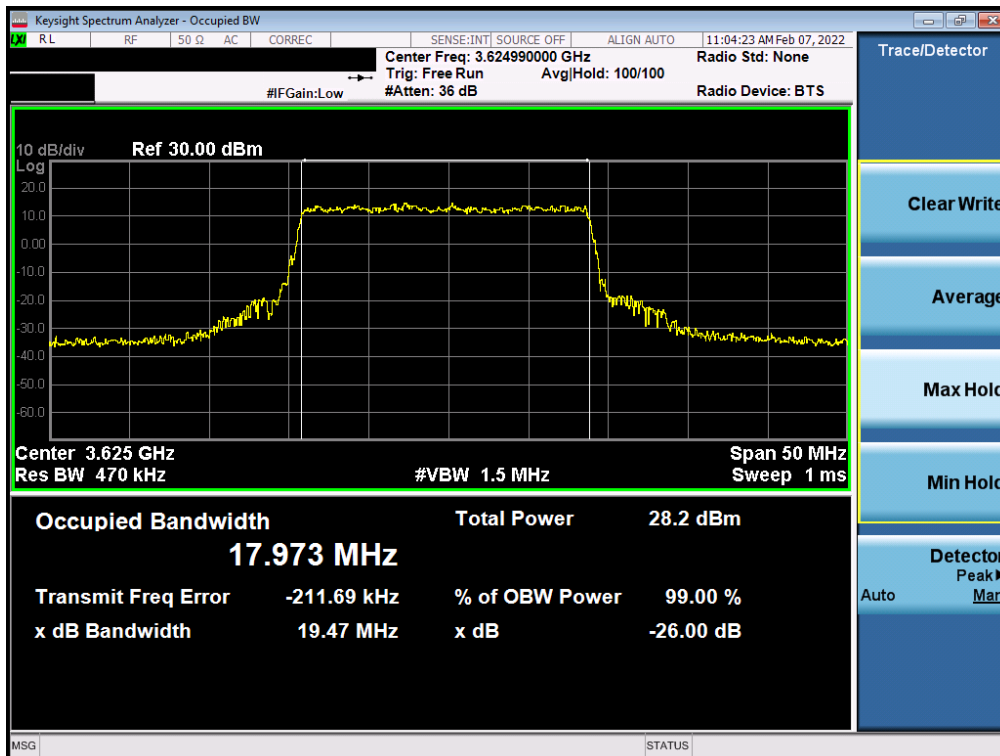


Plot 7-8. Occupied Bandwidth Plot (NR Band n48 - 20MHz QPSK - Full RB Configuration)

FCC ID: A3LSMS901U	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 19 of 53

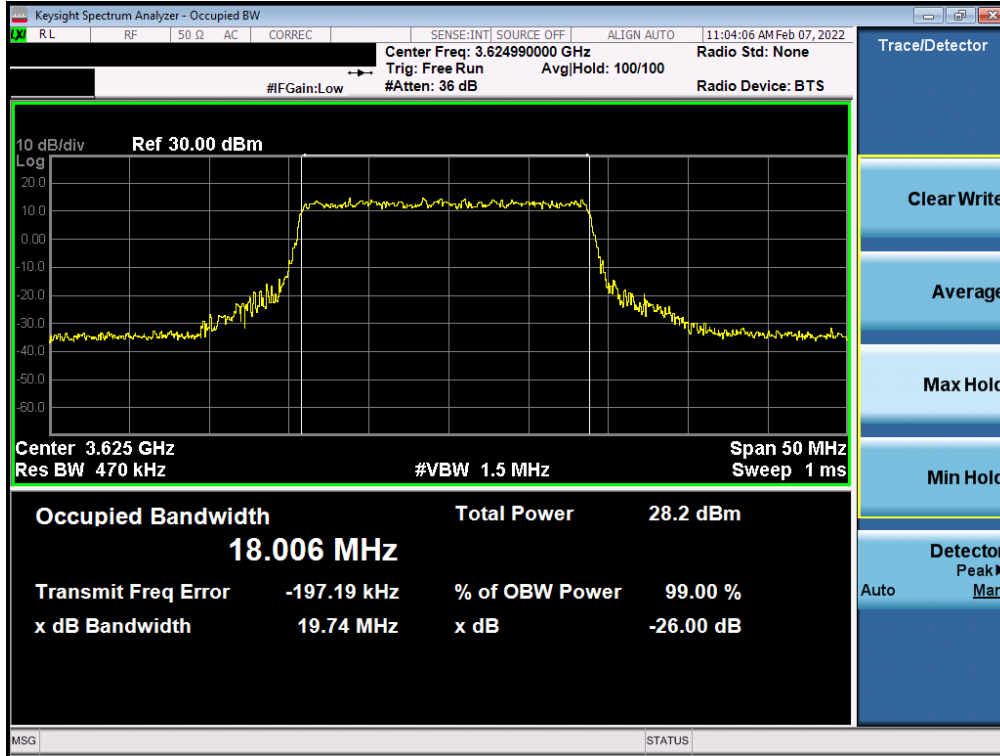

Plot 7-9. Occupied Bandwidth Plot (NR Band n48 - 20MHz 16-QAM - Full RB Configuration)

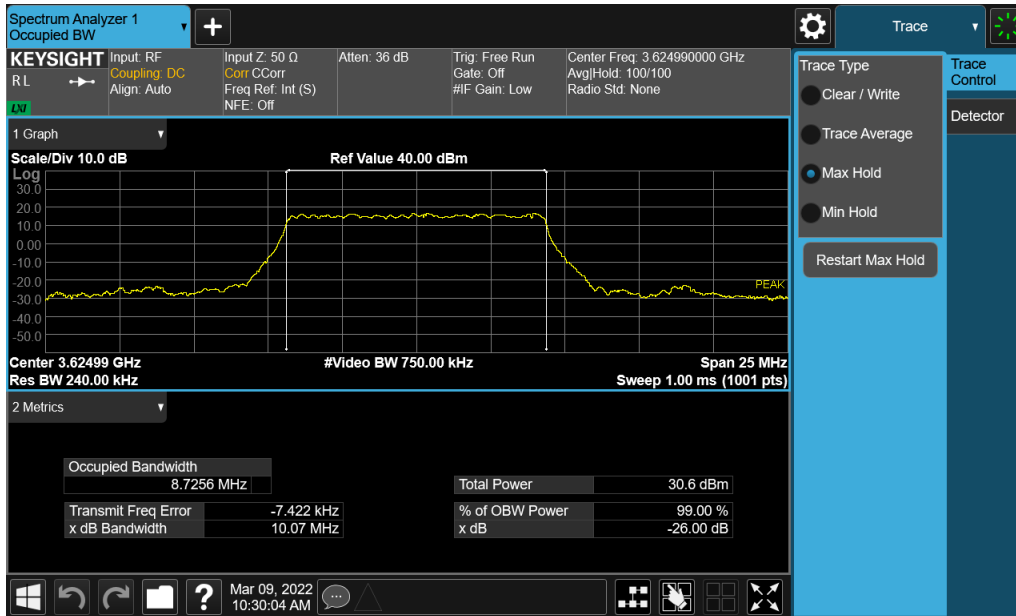

Plot 7-10. Occupied Bandwidth Plot (NR Band n48 - 10MHz $\pi/2$ BPSK - Full RB Configuration)




FCC ID: A3LSMS901U	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 20 of 53



Plot 7-11. Occupied Bandwidth Plot (NR Band n48 - 10MHz QPSK - Full RB Configuration)



Plot 7-12. Occupied Bandwidth Plot (NR Band n48 - 10MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMS901U	 PCTEST Proud to be part of 	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 21 of 53

7.4 Spurious and Harmonic Emissions at Antenna Terminal

\$2.1051 §96.41(e)

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to at least 10 * the fundamental frequency (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = Max Hold
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup



The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-3. Test Instrument & Measurement Setup

Test Notes


Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater.

FCC ID: A3LSMS901U	 PCTEST® Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset	Page 22 of 53	

NR Band n48

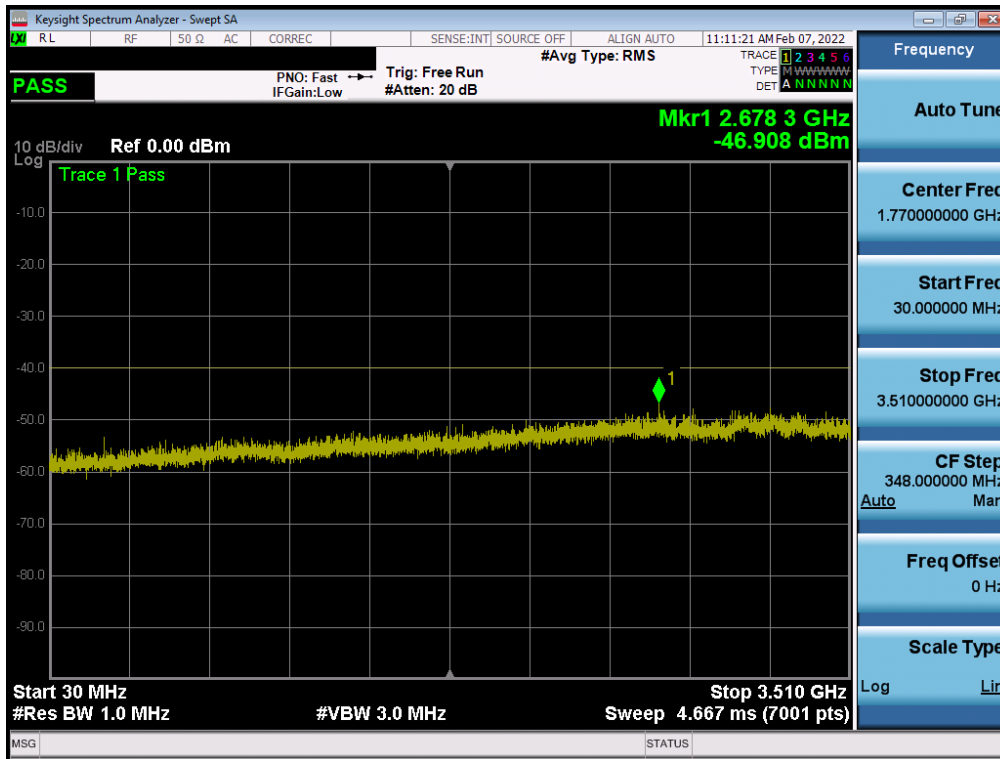


Plot 7-13. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Low Channel)

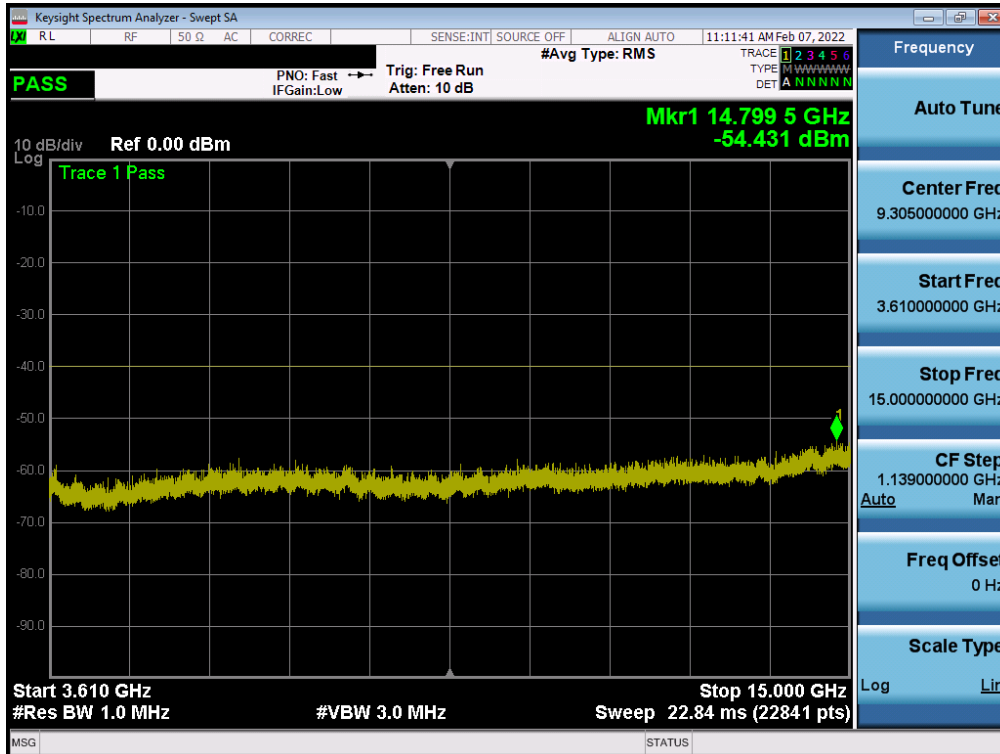


Plot 7-14. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Low Channel)

FCC ID: A3LSMS901U	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 23 of 53

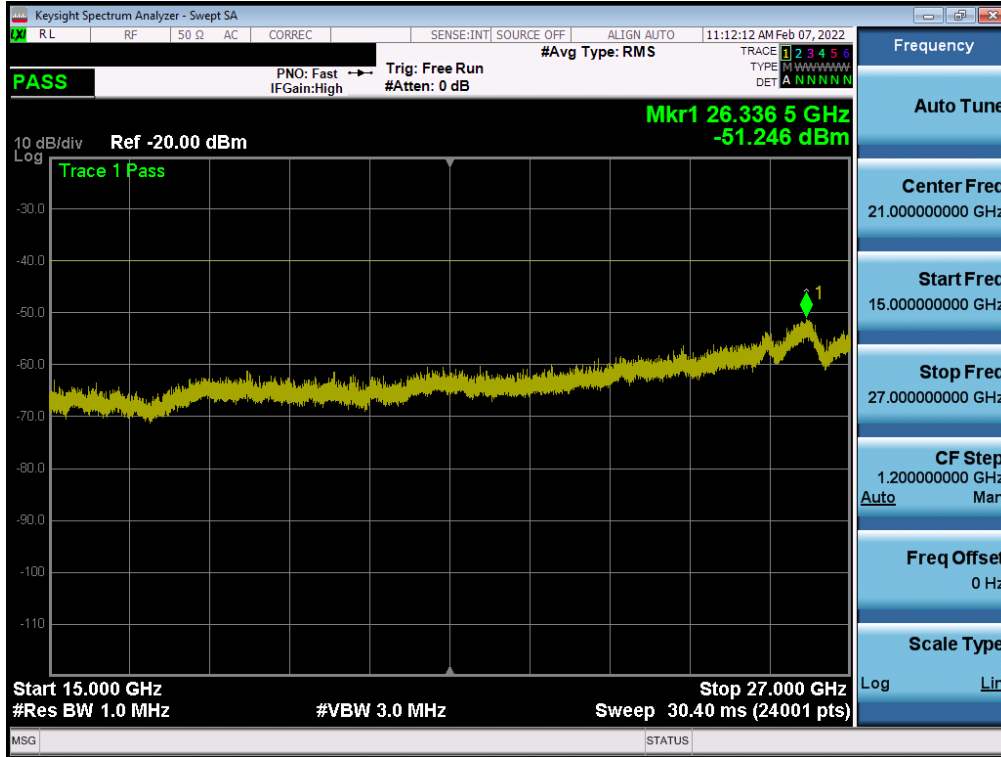


Plot 7-15. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Low Channel)

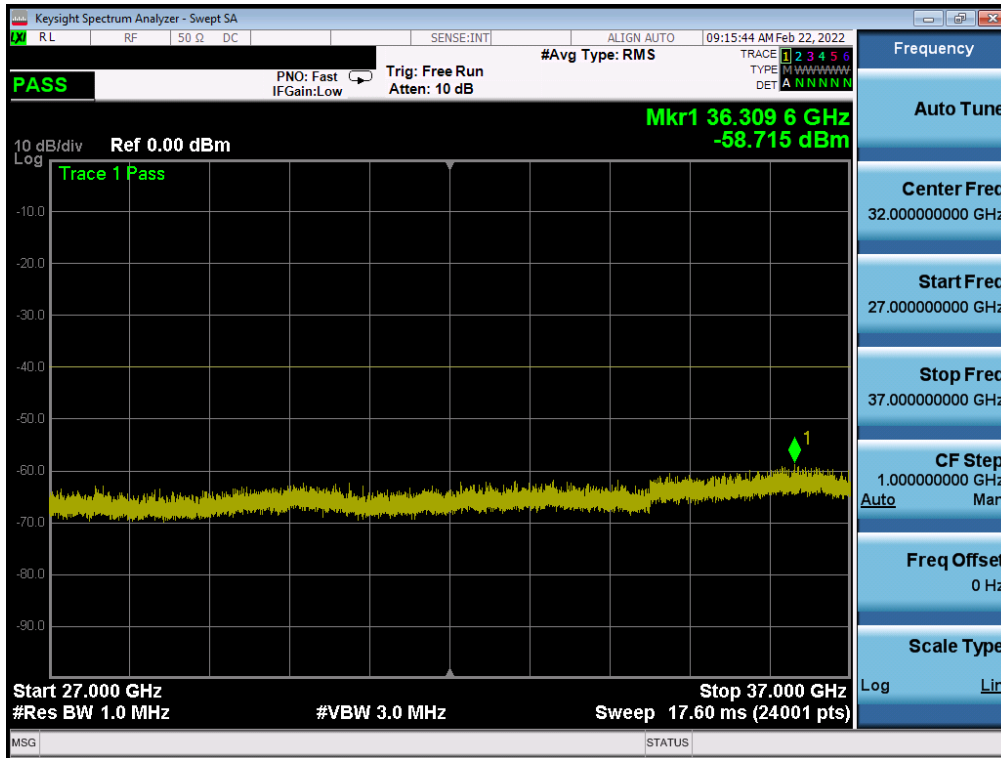


Plot 7-16. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Low Channel)

FCC ID: A3LSMS901U	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 24 of 53

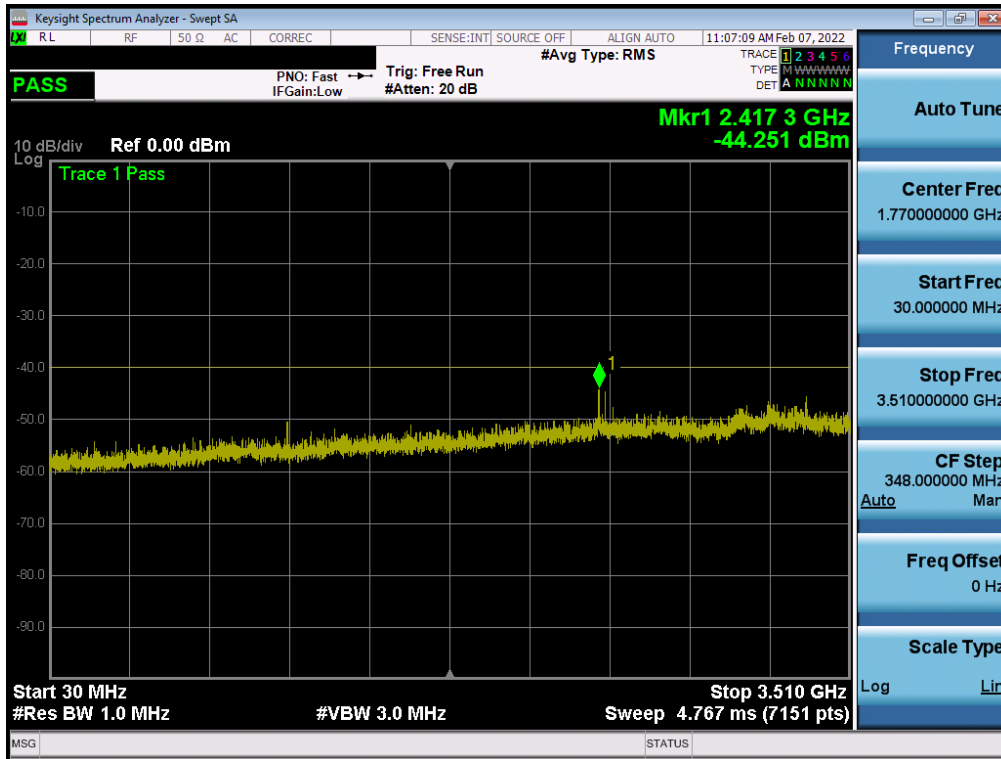


Plot 7-17. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Mid Channel)

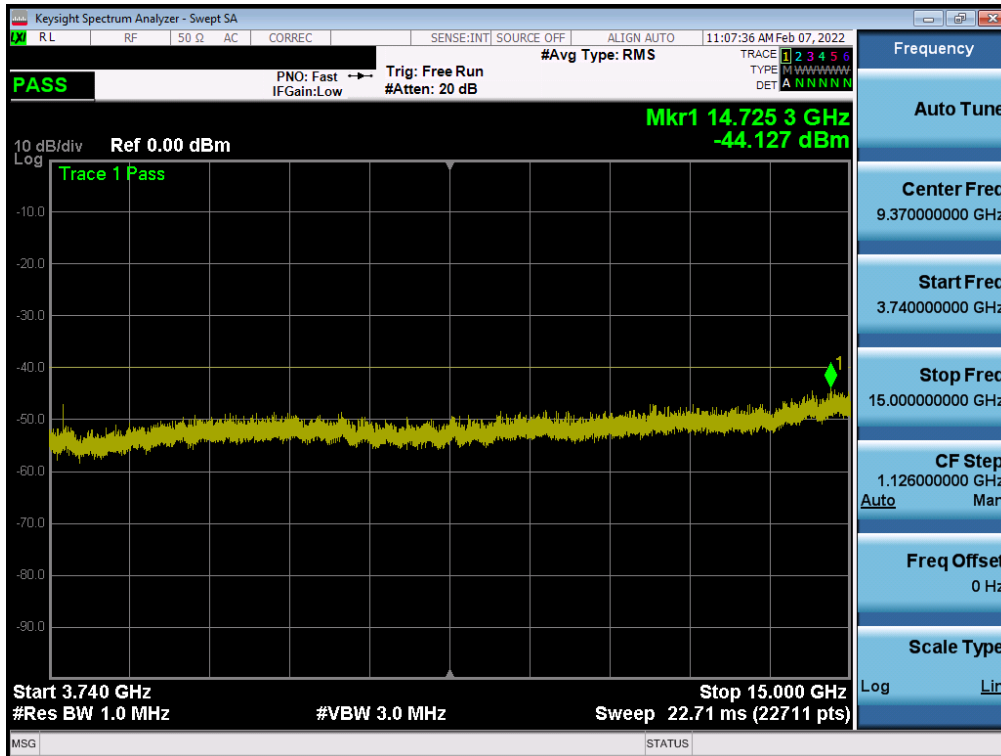


Plot 7-18. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Mid Channel)

FCC ID: A3LSMS901U	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 25 of 53

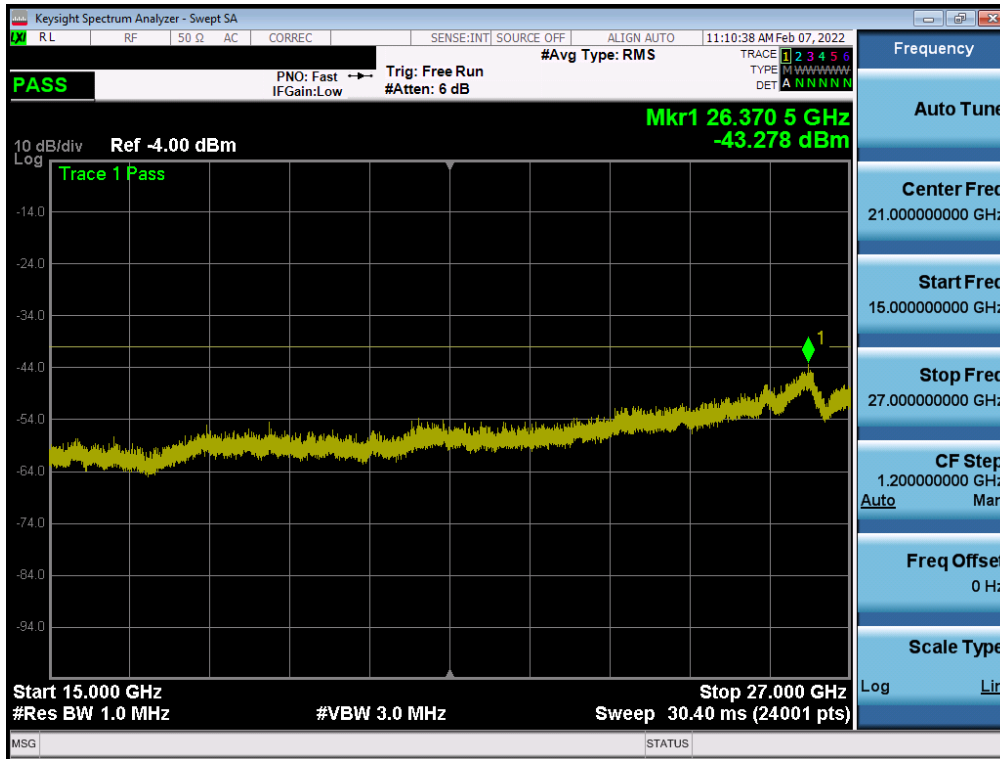


Plot 7-19. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Mid Channel)

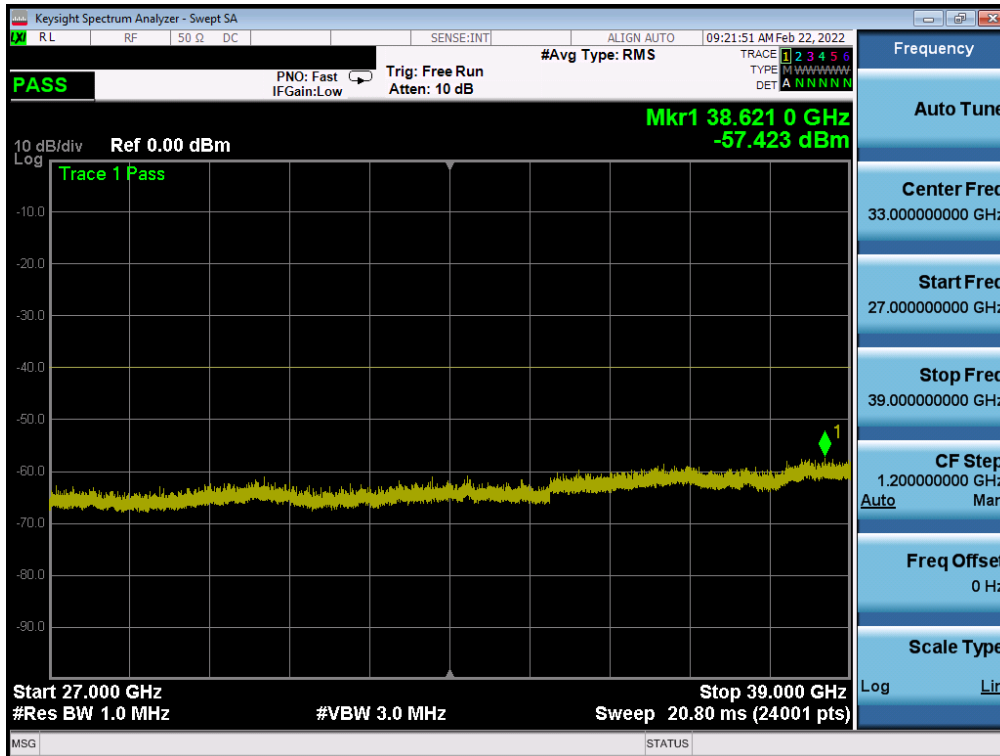


Plot 7-20. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Mid Channel)

FCC ID: A3LSMS901U	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 26 of 53

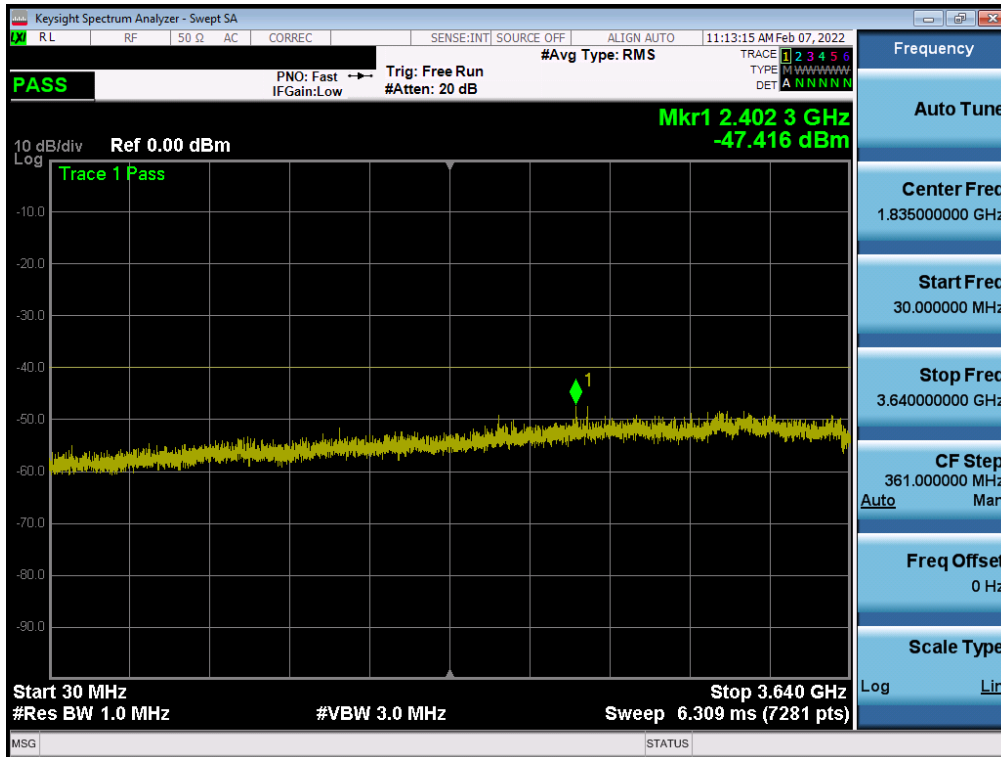


Plot 7-21. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - High Channel)

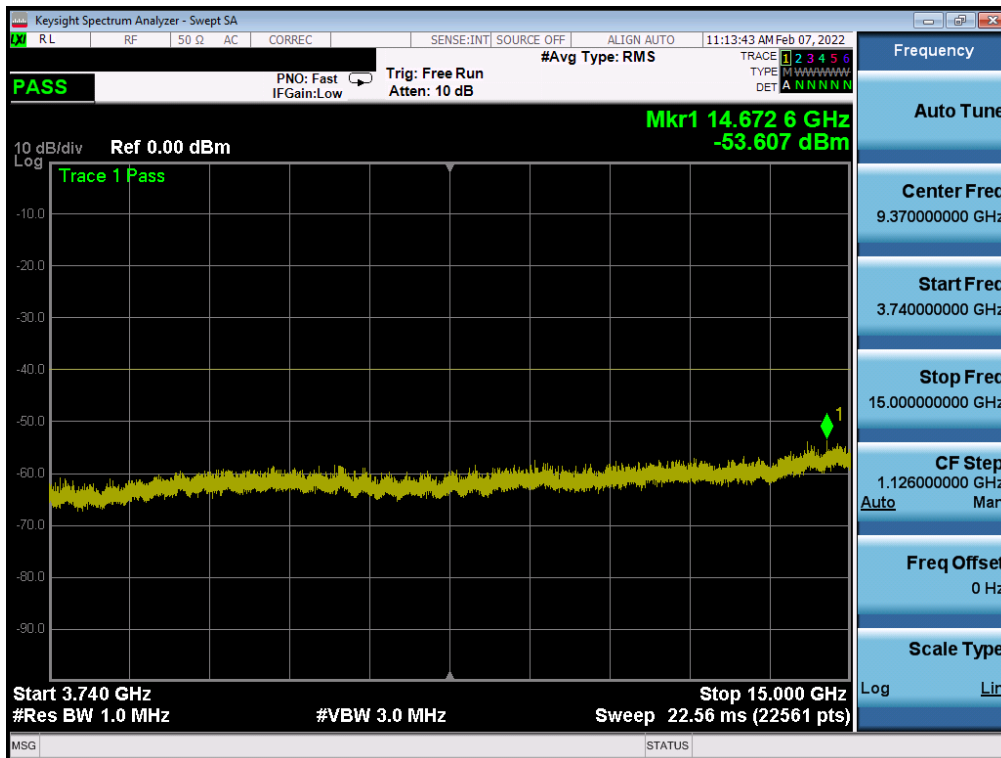


Plot 7-22. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - High Channel)

FCC ID: A3LSMS901U	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 27 of 53

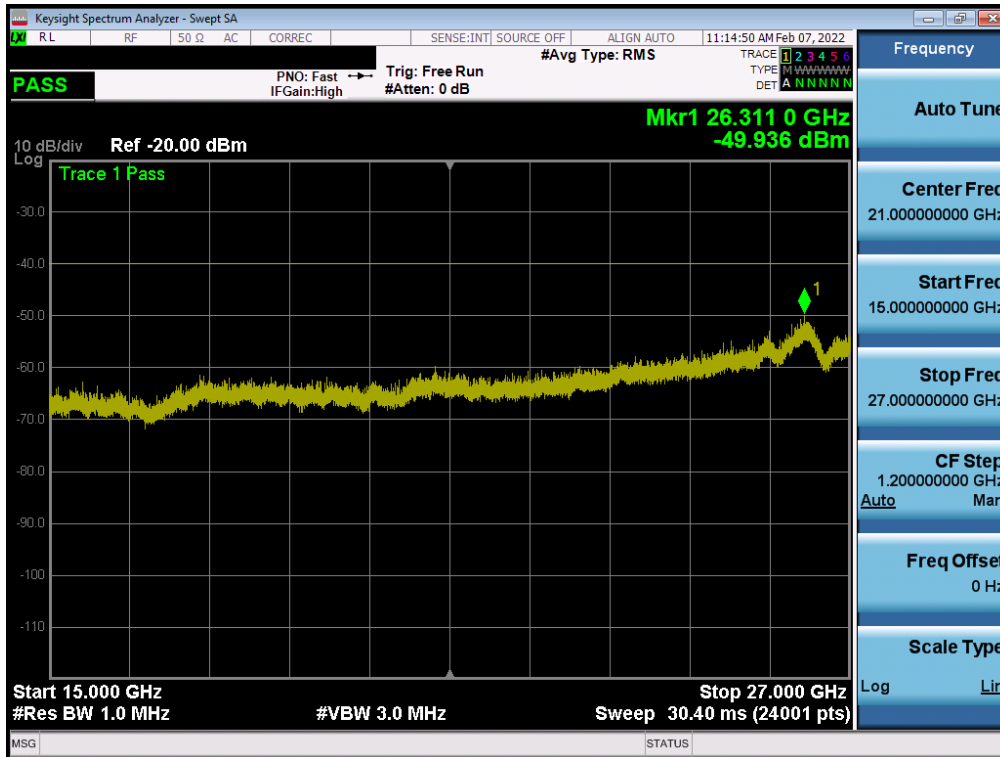

Plot 7-23. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - High Channel)

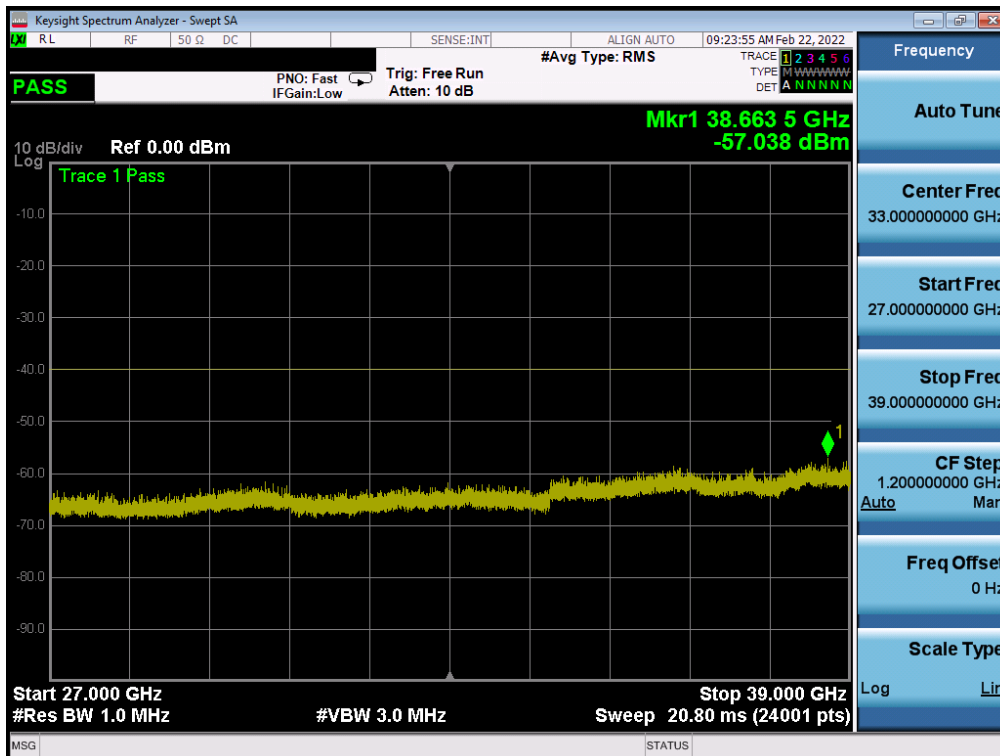

Plot 7-24. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - High Channel)

FCC ID: A3LSMS901U	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 28 of 53

7.5 Band Edge Emissions at Antenna Terminal

§2.1051 §96.41(e)(ii)

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The conducted power of any emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B MHz (where B is the bandwidth in MHz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B MHz below the lower CBSD-assigned channel edge. At all frequencies greater than B MHz above the upper CBSD assigned channel edge and less than B MHz below the lower CBSD-assigned channel edge, the conducted power of any end user device emission shall not exceed -25 dBm/MHz. The conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW \geq 1% of the emission bandwidth
4. VBW \geq 3 x RBW
5. Detector = RMS
6. Number of sweep points \geq 2 x Span/RBW
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup



The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-4. Test Instrument & Measurement Setup

Test Notes


Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's authorized frequency channel, a resolution bandwidth of no less than one percent of the fundamental emission bandwidth may be employed.

FCC ID: A3LSMS901U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset	Page 29 of 53	

NR Band n48

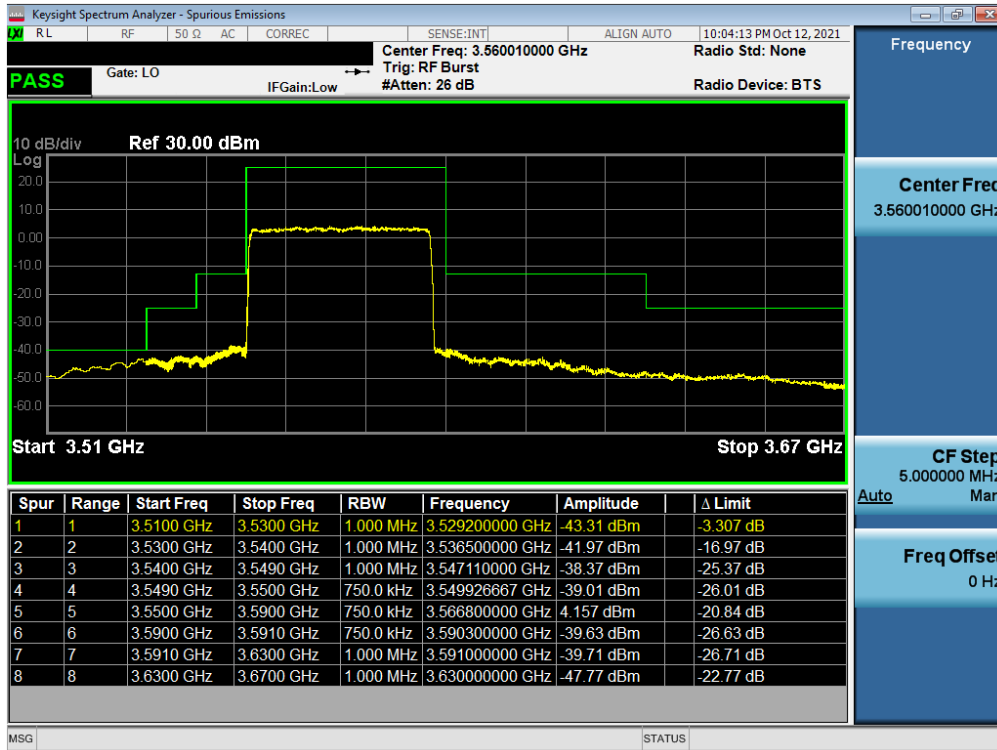


Plot 7-25. Channel - Ant1 Edge Plot (NR Band n48 - 40MHz QPSK - Low Channel)

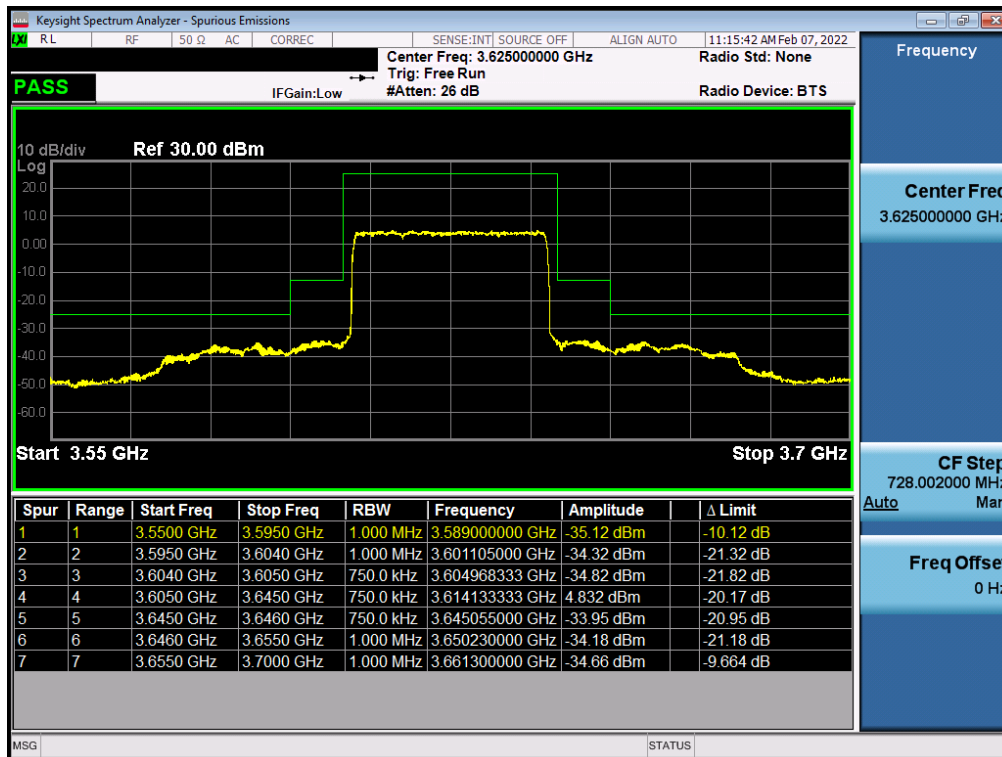


Plot 7-26. Channel - Ant1 Edge Plot (NR Band n48 - 40MHz QPSK - Mid Channel)

FCC ID: A3LSMS901U	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 30 of 53

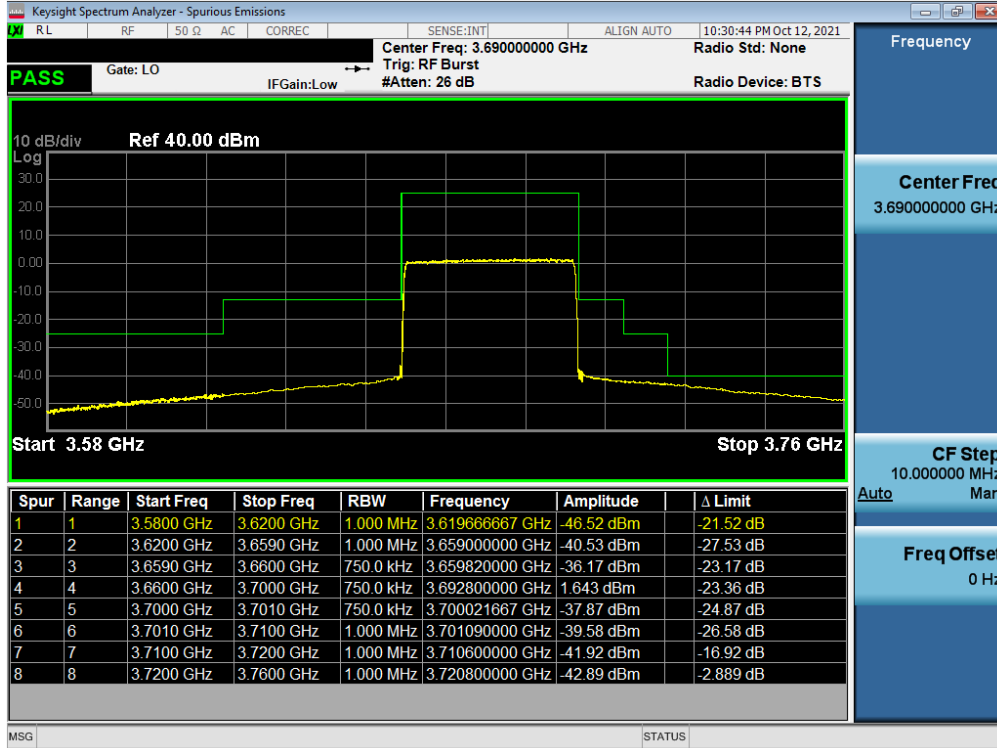


Plot 7-27. Channel - Ant1 Edge Plot (NR Band n48 - 40MHz QPSK - High Channel)

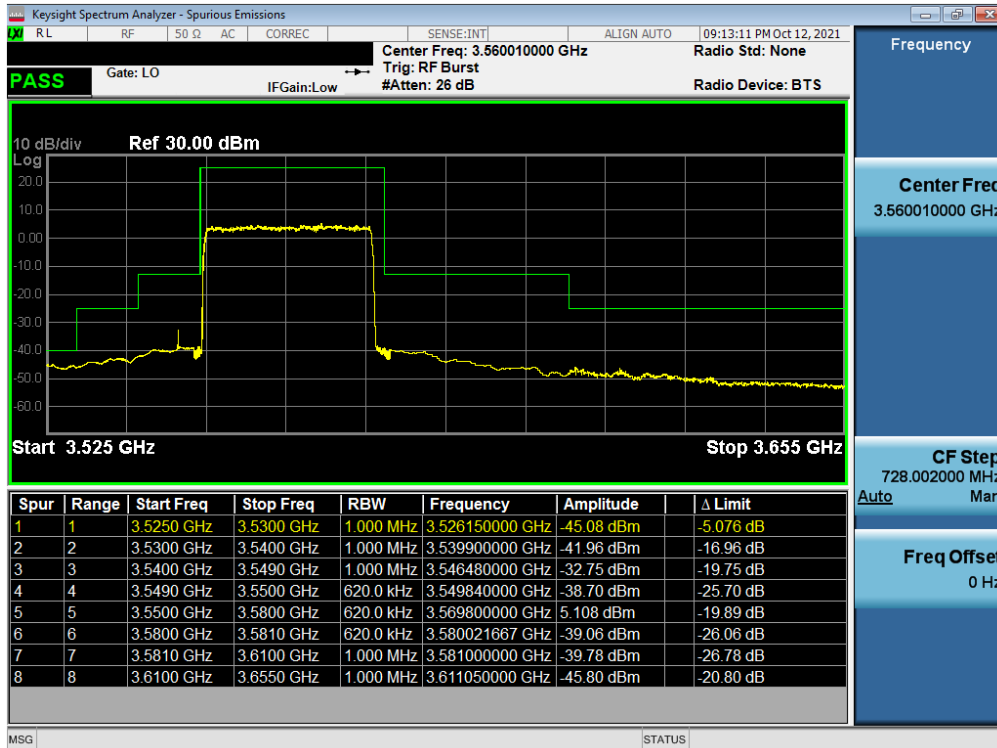


Plot 7-28. Channel - Ant1 Edge Plot (NR Band n48 - 30MHz QPSK - Low Channel)

FCC ID: A3LSMS901U	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 31 of 53

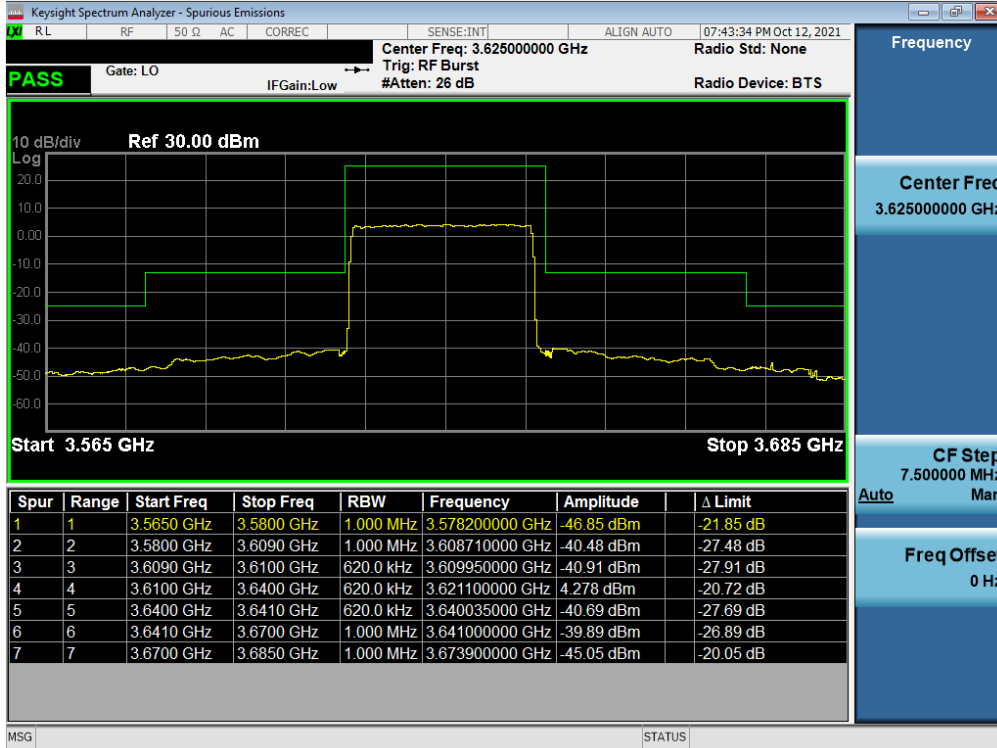


Plot 7-29. Channel - Ant1 Edge Plot (NR Band n48 - 30MHz QPSK - Mid Channel)

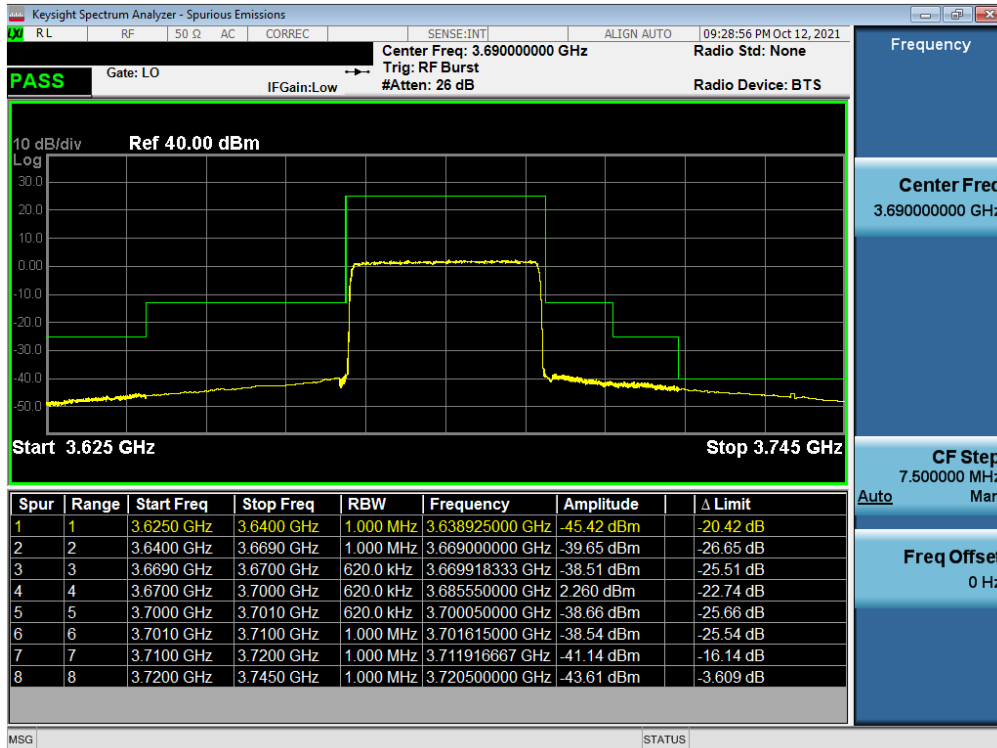


Plot 7-30. Channel - Ant1 Edge Plot (NR Band n48 - 30MHz QPSK - High Channel)

FCC ID: A3LSMS901U	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 32 of 53

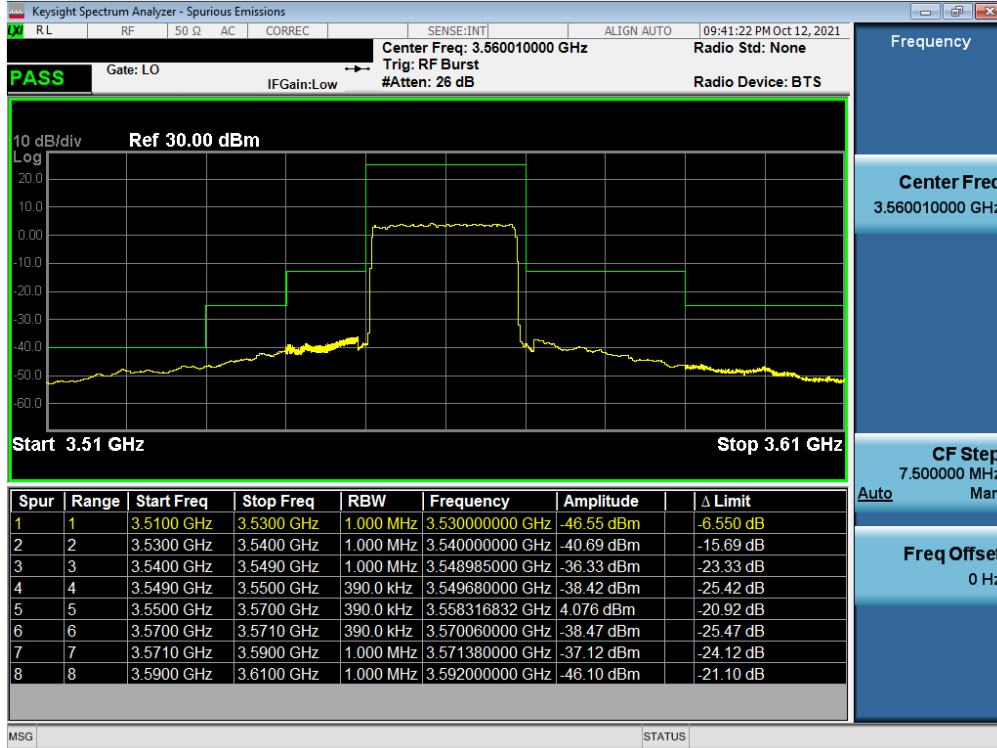


Plot 7-31. Channel - Ant1 Edge Plot (NR Band n48 - 20MHz QPSK - Low Channel)

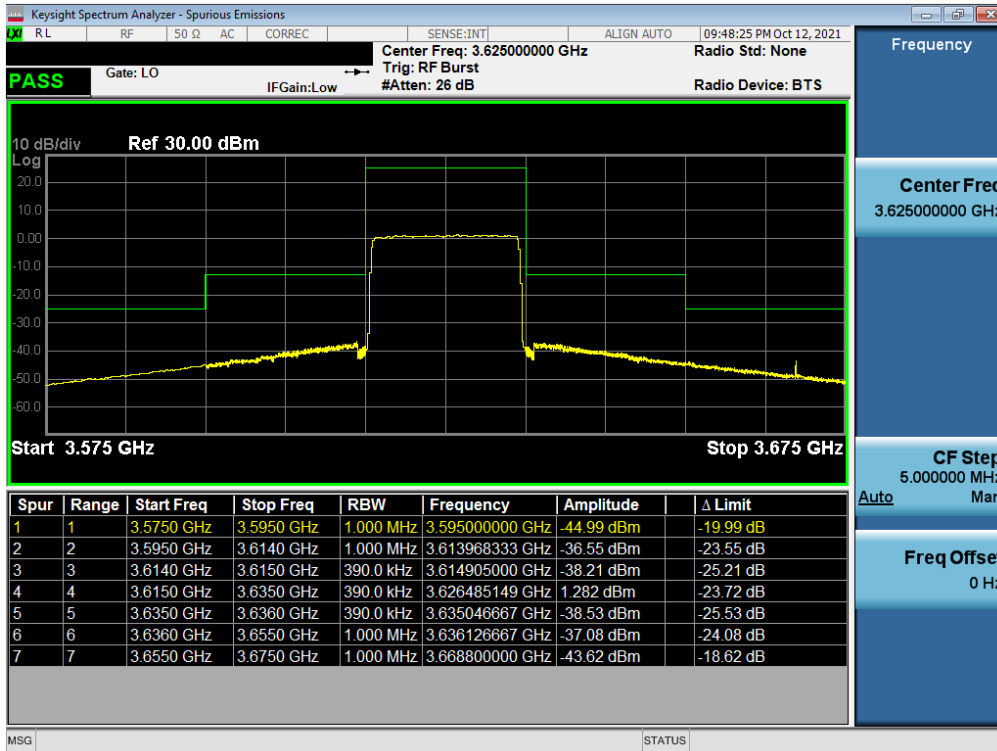


Plot 7-32. Channel - Ant1 Edge Plot (NR Band n48 - 20MHz QPSK - Mid Channel)

FCC ID: A3LSMS901U	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 33 of 53

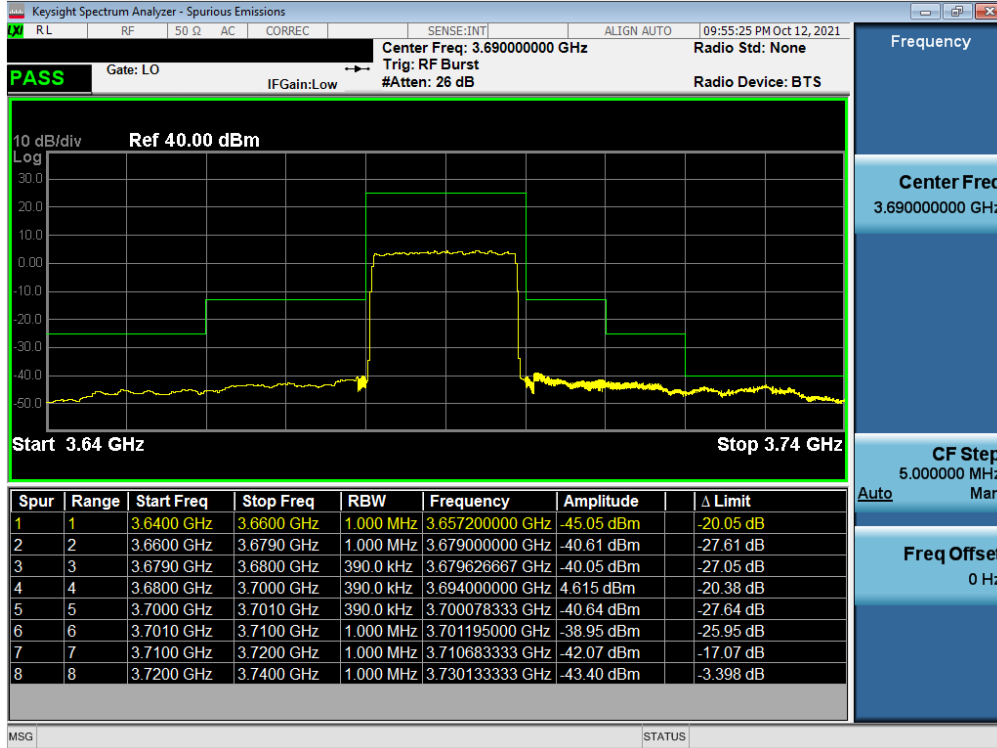


Plot 7-33. Channel - Ant1 Edge Plot (NR Band n48 - 20MHz QPSK - High Channel)

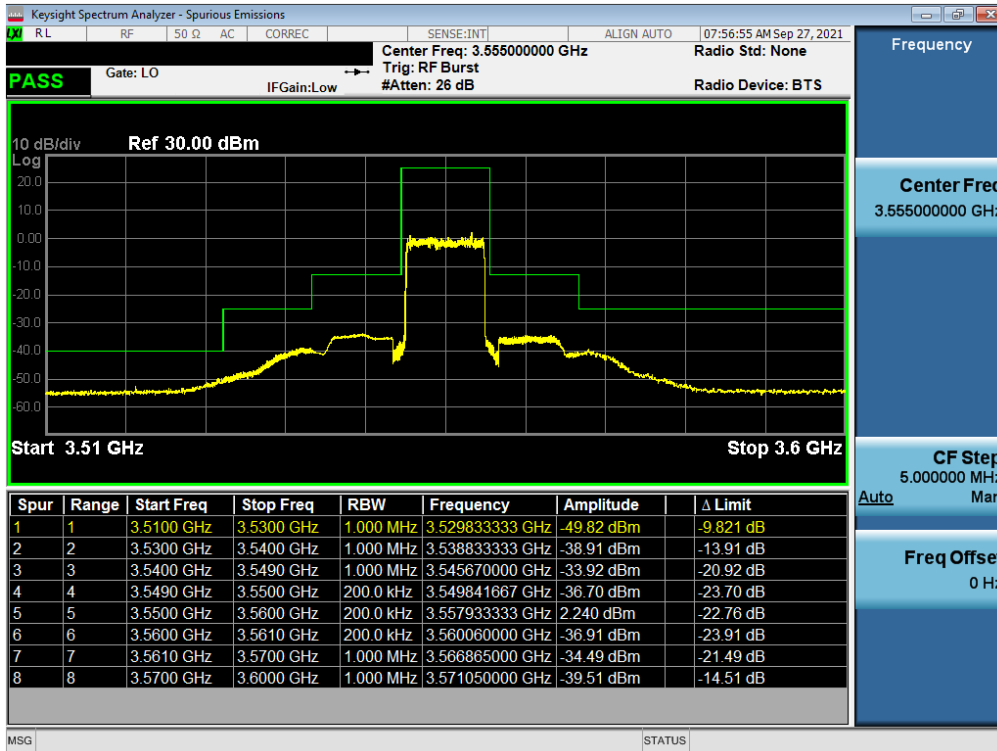


Plot 7-34. Channel - Ant1 Edge Plot (NR Band n48 - 10MHz QPSK - Low Channel)

FCC ID: A3LSMS901U	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 34 of 53

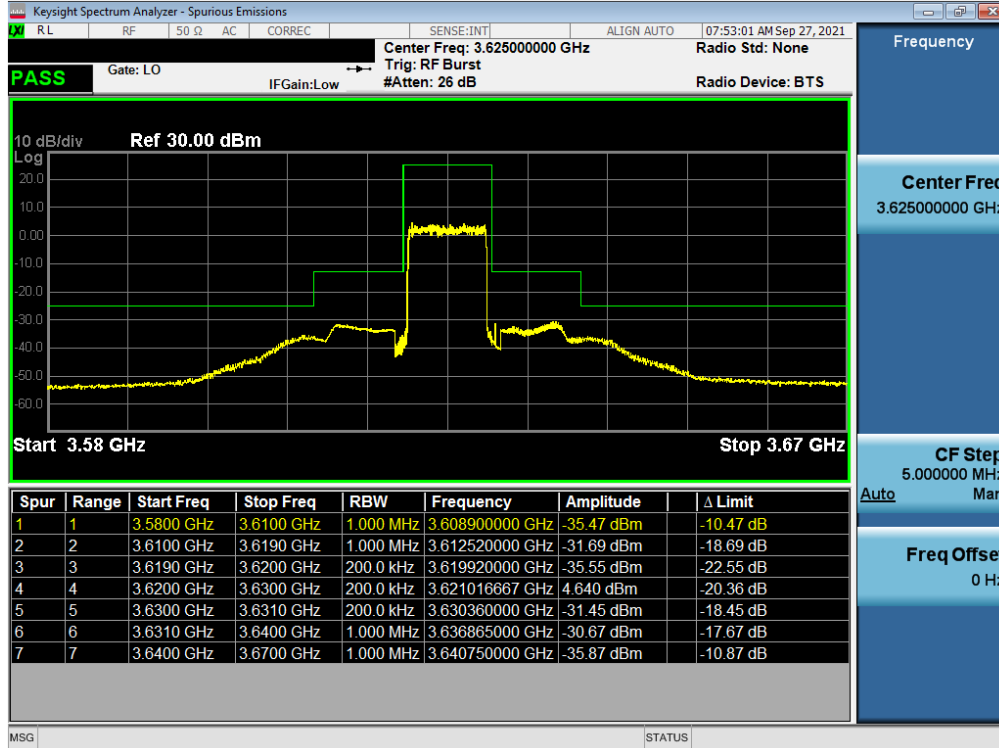

Plot 7-35. Channel - Ant1 Edge Plot (NR Band n48 - 10MHz QPSK - Mid Channel)

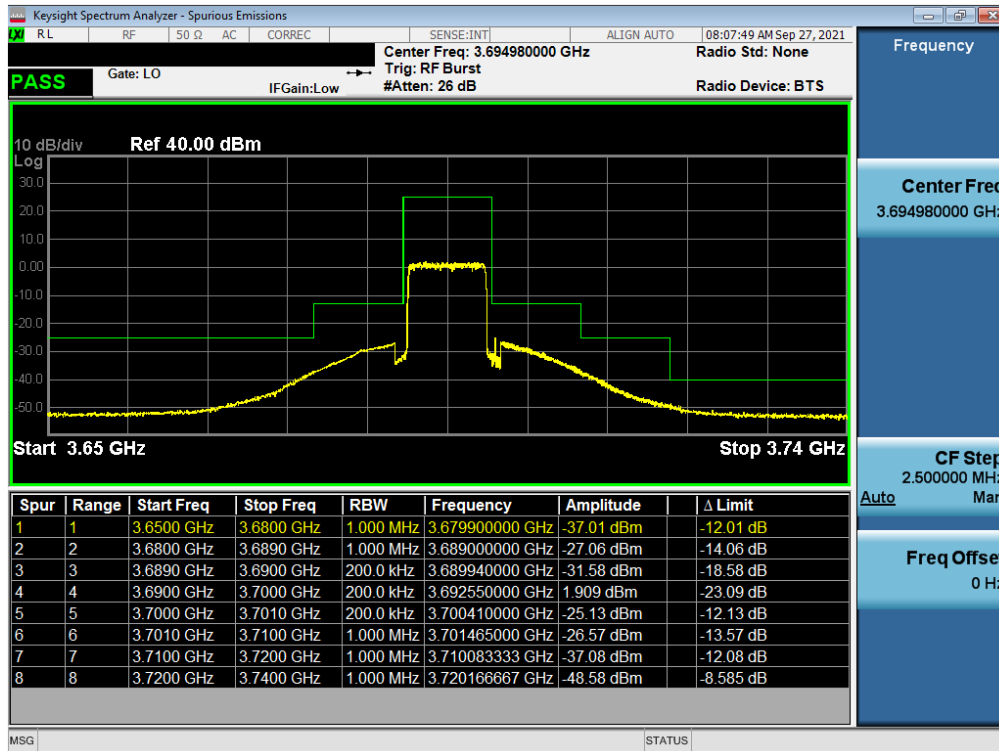

Plot 7-36. Channel - Ant1 Edge Plot (NR Band n48 - 10MHz QPSK - High Channel)

FCC ID: A3LSMS901U	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 35 of 53

7.6 Radiated Power (EIRP)

§96.41(b)

Test Overview

Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.



Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points \geq 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was set equal to 10MHz.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: A3LSMS901U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset	Page 36 of 53	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

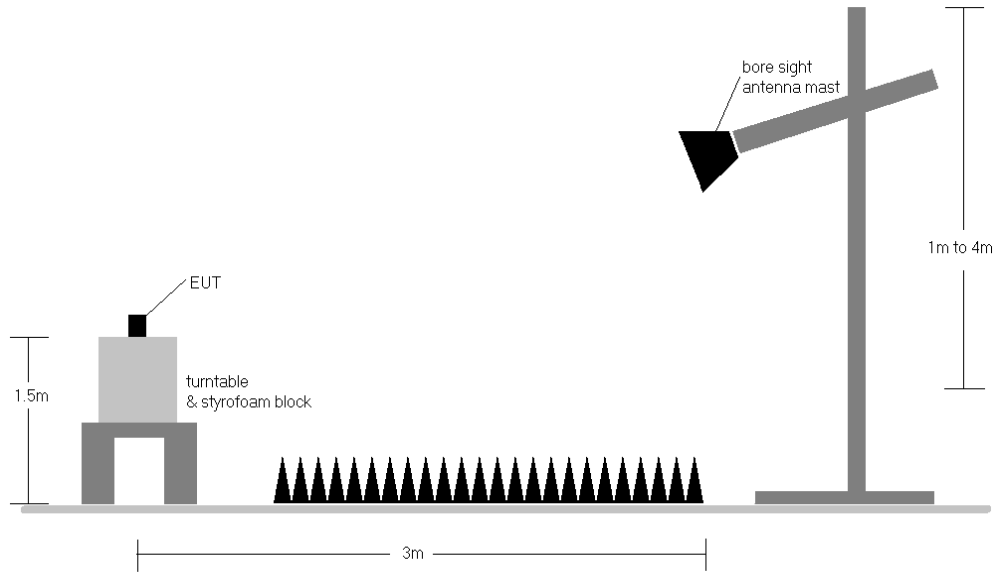




Figure 7-5. Radiated Test Setup >1GHz



Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g., CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.
- 4) The worst case EIRP shown in this section is found with NR operating only using 1RB. As such, the EIRP/10MHz and full channel EIRP values will be identical since 1RB is fully contained within all available channel bandwidths for NR Band 48 (i.e. 10, 20, 30, 40MHz).

FCC ID: A3LSMS901U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset	Page 37 of 53	

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
40 MHz	$\pi/2$ BPSK	3570.0	V	117	277	7.14	1 / 53	12.54	19.68	0.093	23.00	-3.32
	$\pi/2$ BPSK	3625.0	V	124	284	6.91	1 / 53	11.93	18.84	0.077	23.00	-4.16
	$\pi/2$ BPSK	3680.0	V	110	285	6.63	1 / 79	12.35	18.98	0.079	23.00	-4.02
	QPSK	3570.0	V	117	277	7.14	1 / 53	12.61	19.75	0.094	23.00	-3.25
	QPSK	3625.0	V	124	284	6.91	1 / 53	12.00	18.91	0.078	23.00	-4.09
	QPSK	3680.0	V	110	285	6.63	1 / 79	12.33	18.96	0.079	23.00	-4.04
16-QAM	3570.0	V	117	277	7.14	1 / 53	11.48	18.62	0.073	23.00	-4.38	
30 MHz	$\pi/2$ BPSK	3565.0	V	117	277	7.15	1 / 20	12.68	19.83	0.096	23.00	-3.17
	$\pi/2$ BPSK	3625.0	V	124	284	6.91	1 / 19	12.07	18.98	0.079	23.00	-4.02
	$\pi/2$ BPSK	3685.0	V	110	285	6.62	1 / 19	12.54	19.16	0.082	23.00	-3.84
	QPSK	3565.0	V	117	277	7.15	1 / 58	12.70	19.85	0.097	23.00	-3.15
	QPSK	3625.0	V	124	284	6.91	1 / 19	12.00	18.91	0.078	23.00	-4.09
	QPSK	3685.0	V	110	285	6.62	1 / 19	12.60	19.22	0.084	23.00	-3.78
16-QAM	3685.0	V	110	285	6.62	1 / 19	12.35	18.97	0.079	23.00	-4.03	
20 MHz	$\pi/2$ BPSK	3560.0	V	117	277	7.15	1 / 37	11.91	19.06	0.081	23.00	-3.94
	$\pi/2$ BPSK	3625.0	V	124	284	6.91	1 / 37	12.27	19.18	0.083	23.00	-3.82
	$\pi/2$ BPSK	3690.0	V	110	285	6.60	1 / 37	12.41	19.01	0.080	23.00	-3.99
	QPSK	3560.0	V	117	277	7.15	1 / 37	11.86	19.01	0.080	23.00	-3.99
	QPSK	3625.0	V	124	284	6.91	1 / 37	12.14	19.05	0.080	23.00	-3.95
	QPSK	3690.0	V	110	285	6.60	1 / 37	12.67	19.27	0.085	23.00	-3.73
16-QAM	3560.0	V	117	277	7.15	1 / 37	12.00	19.15	0.082	23.00	-3.85	
10 MHz	$\pi/2$ BPSK	3555.0	V	117	277	7.15	1 / 17	12.32	19.47	0.088	23.00	-3.53
	$\pi/2$ BPSK	3625.0	V	124	284	6.91	1 / 17	11.99	18.90	0.078	23.00	-4.10
	$\pi/2$ BPSK	3695.0	V	110	285	6.59	1 / 6	12.28	18.87	0.077	23.00	-4.13
	QPSK	3555.0	V	117	277	7.15	1 / 17	12.36	19.51	0.089	23.00	-3.49
	QPSK	3625.0	V	124	284	6.91	1 / 17	11.90	18.81	0.076	23.00	-4.19
	QPSK	3695.0	V	110	285	6.59	1 / 6	12.39	18.98	0.079	23.00	-4.02
16-QAM	3555.0	V	117	277	7.15	1 / 17	12.33	19.48	0.089	23.00	-3.52	
40 MHz	QPSK (CP-OFDM)	3570.0	V	101	279	6.63	1 / 26	9.48	16.11	0.041	23.00	-6.89
	QPSK (Opposite Pol.)	3570.0	H	112	309	6.25	1 / 26	12.26	18.51	0.071	23.00	-4.49
	QPSK (WCP)	3570.0	V	111	290	6.63	1 / 53	12.79	19.42	0.087	23.00	-3.58

Table 7-7. EIRP Data (NR Band n48)

FCC ID: A3LSMS901U	 PCTEST [®] Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 38 of 53

7.7 Radiated Spurious Emissions Measurements

~~§2.1053~~ §96.41(e)

Test Overview



Radiated spurious emissions measurements are performed using the field strength conversion method described in KDB 971168 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points \geq 2 x span / RBW
5. Detector = RMS
6. Trace mode = Max Hold (In cases where the level is within 2dB of the limit, the final measurement is taken using triggering/gating and trace averaging.)
7. The trace was allowed to stabilize

FCC ID: A3LSMS901U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 39 of 53

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

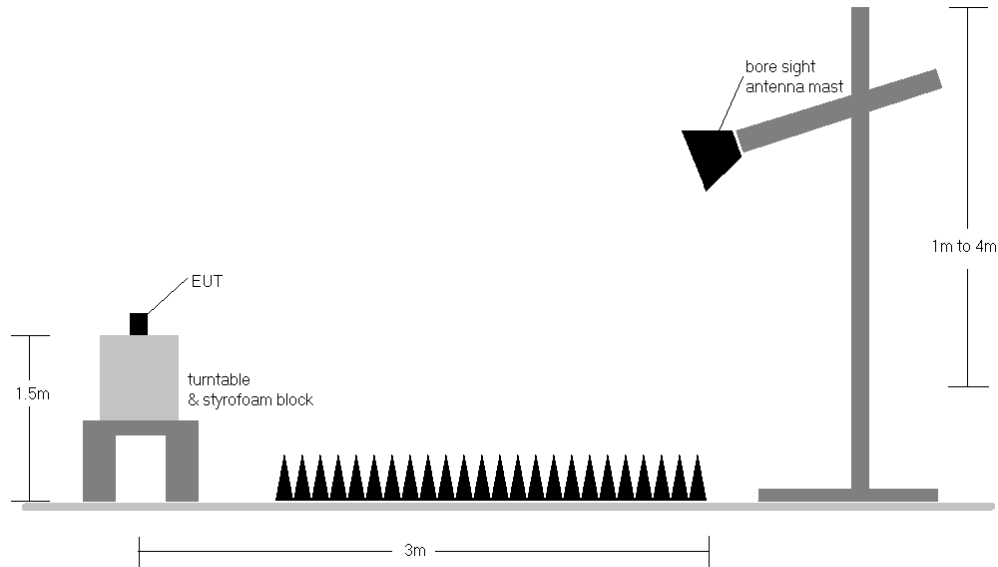





Figure 7-6. Test Instrument & Measurement Setup


Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 4) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 5) The "-" shown in the following RSE tables are used to denote a noise floor measurement.
- 6) Per KDB 971168, Field Strength Level (dBµV/m) is converted to EIRP Spurious Emission Level (dBm) using the formula in Section 5.8.4 (d):


$$\text{EIRP (dBm)} = \text{E (dB}\mu\text{V/m)} + 20 \log D - 104.8;$$
 where D is the measurement distance in meters
- 7) For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.
- 8) Spurious emissions shown in this section are measured while operating in EN-DC mode with Sub 6GHz NR carrier as well as an LTE carrier (anchor). Spurious emissions from the NR carrier device, is subject to the rules under which the NR carrier operates. Spurious emission caused by the LTE carrier must meet the requirements of the rules under which the LTE carrier operates.

FCC ID: A3LSMS901U	 PCTEST Proud to be part of 	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 40 of 53


NR Band n48

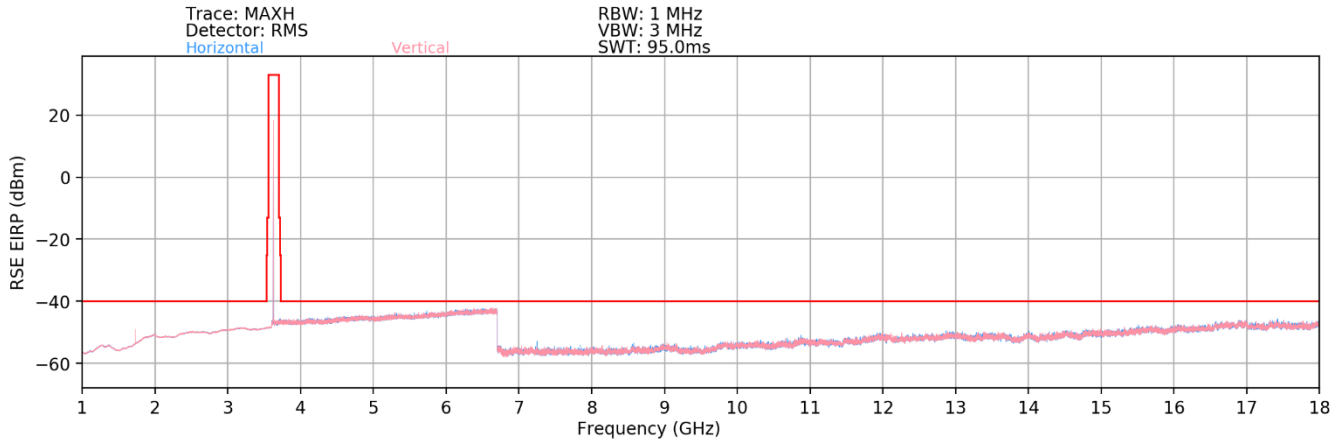

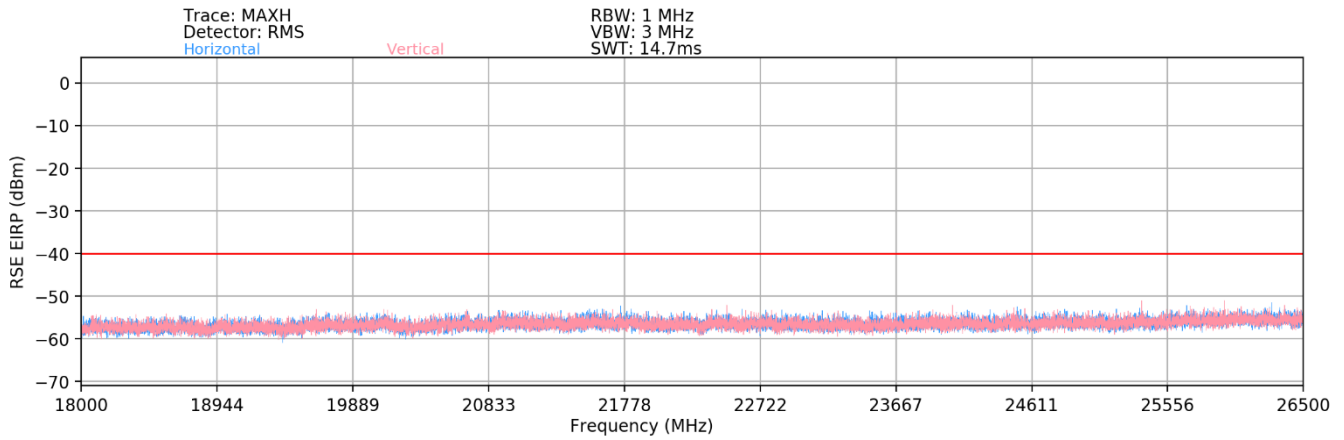


Plot 7-37. Radiated Spurious Plot (NR Band n48)

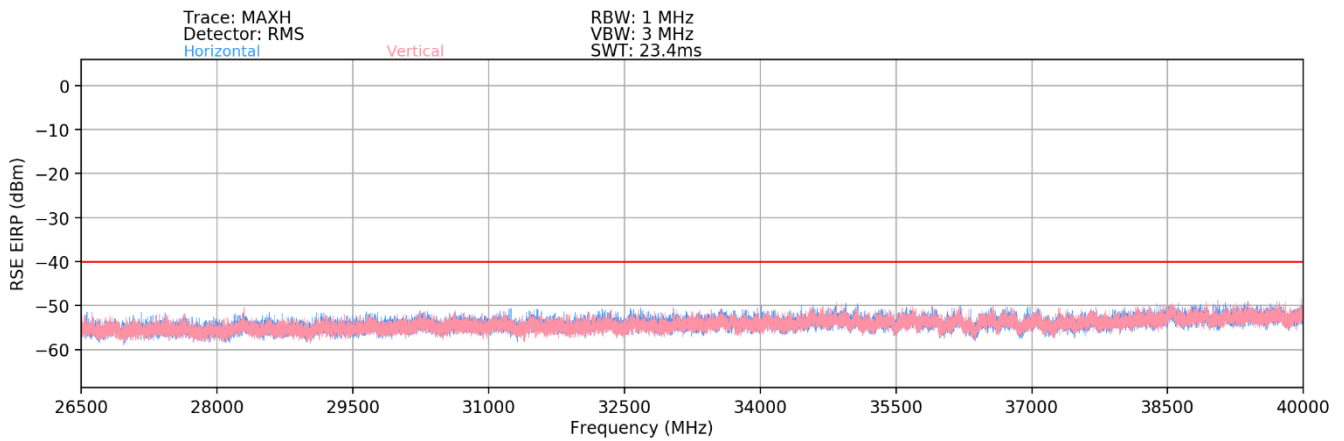

Plot 7-38. Radiated Spurious Plot (NR Band n48)



Plot 7-39. Radiated Spurious Plot (NR Band n48)

FCC ID: A3LSMS901U	 PCTEST Proud to be part of 	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 41 of 53

Bandwidth (MHz):	20
Frequency (MHz):	3560.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50
Detector / Trace Mode:	RMS / Max Hold
RBW / VBW:	1MHz / 3MHz

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7120.00	H	211.00	39.00	-71.99	15.82	50.83	-44.42	-40.00	-4.42
10680.00	H	-	-	-75.61	20.80	52.19	-43.07	-40.00	-3.07
14240.00	H	-	-	-83.60	27.62	51.02	-44.24	-40.00	-4.24

Table 7-8. Radiated Spurious Data (NR Band n48 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	3625.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50
Detector / Trace Mode:	RMS / Max Hold
RBW / VBW:	1MHz / 3MHz



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7250.00	H	123.00	41.00	-72.66	15.87	50.21	-45.04	-40.00	-5.04
10875.00	H	-	-	-76.25	21.45	52.20	-43.05	-40.00	-3.05
14500.00	H	-	-	-87.40	27.75	47.35	-47.90	-40.00	-7.90

Table 7-9. Radiated Spurious Data (NR Band n48 – Mid Channel)

Bandwidth (MHz):	40
Frequency (MHz):	3680.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	
Detector / Trace Mode:	RMS / Max Hold
RBW / VBW:	1MHz / 3MHz

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7360.00	H	204.00	58.00	-72.46	16.43	50.97	-44.29	-40.00	-4.29
11040.00	H	-	-	-76.98	22.02	52.04	-43.22	-40.00	-3.22
14720.00	H	-	-	-86.33	28.00	48.67	-46.58	-40.00	-6.58




Table 7-10. Radiated Spurious Data (NR Band n48 – High Channel)

FCC ID: A3LSMS901U	 PCTEST® Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 42 of 53


Bandwidth (MHz):	40
Frequency (MHz):	3625.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53
Detector / Trace Mode:	RMS / Max Ho
RBW / VBW:	1MHz / 3MHz

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7250.0	V	-	-	-75.22	15.87	47.65	-47.60	-40.00	-7.60
10875.0	V	-	-	-77.19	21.45	51.26	-43.99	-40.00	-3.99
14500.0	V	-	-	-87.66	27.75	47.09	-48.16	-40.00	-8.16


Table 7-11. Radiated Spurious Data with WCP (NR Band n48)

FCC ID: A3LSMS901U	 PCTEST Proud to be part of  element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 43 of 53

EN-DC: NR Band n48 – B66

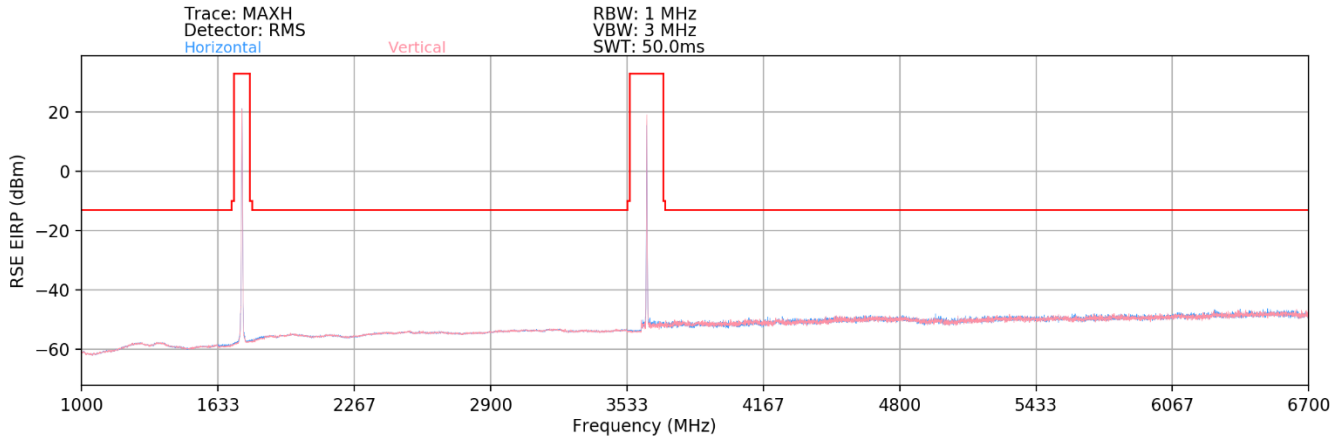

Plot 7-40. Radiated Spurious Plot (NR Band n48 – B66)

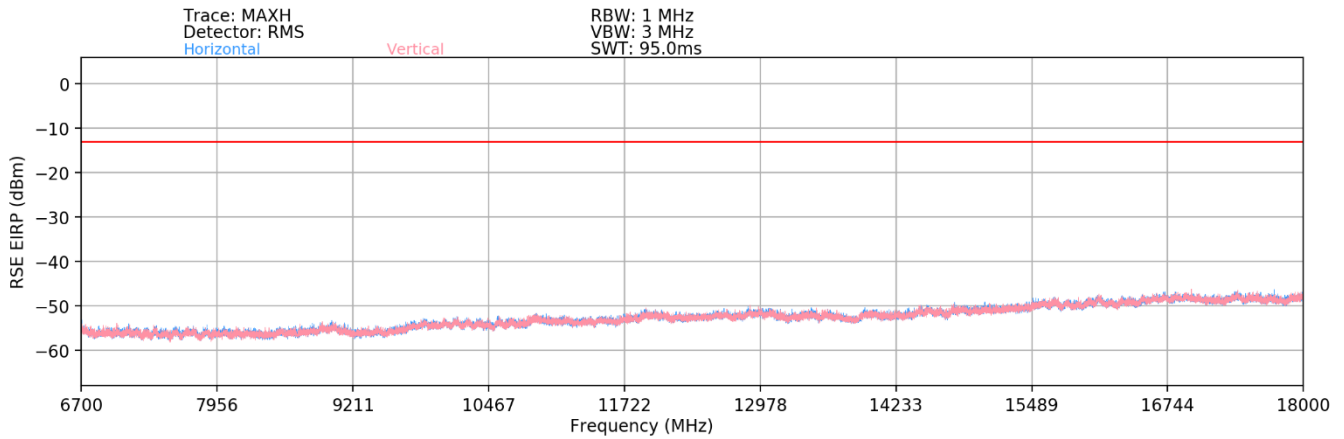



Plot 7-41. Radiated Spurious Plot (NR Band n48 – B66)


Bandwidth (MHz):	40 & 20
Frequency (MHz):	3625 & 1745
RB Config (Size / Offset):	1/53 & 1/50
Detector / Trace Mode:	RMS / Max Hol
RBW / VBW:	1MHz / 3MHz

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5505.0	V	-	-	-76.66	14.77	45.11	-50.15	-13.00	-37.15
7385.0	V	-	-	-79.02	9.71	37.69	-57.57	-13.00	-44.57
9265.0	V	-	-	-78.83	9.52	37.69	-57.56	-13.00	-44.56


Table 7-12. Radiated Spurious Data (NR Band n48 – B66)

FCC ID: A3LSMS901U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 44 of 53

EN-DC: NR Band n48 – B2

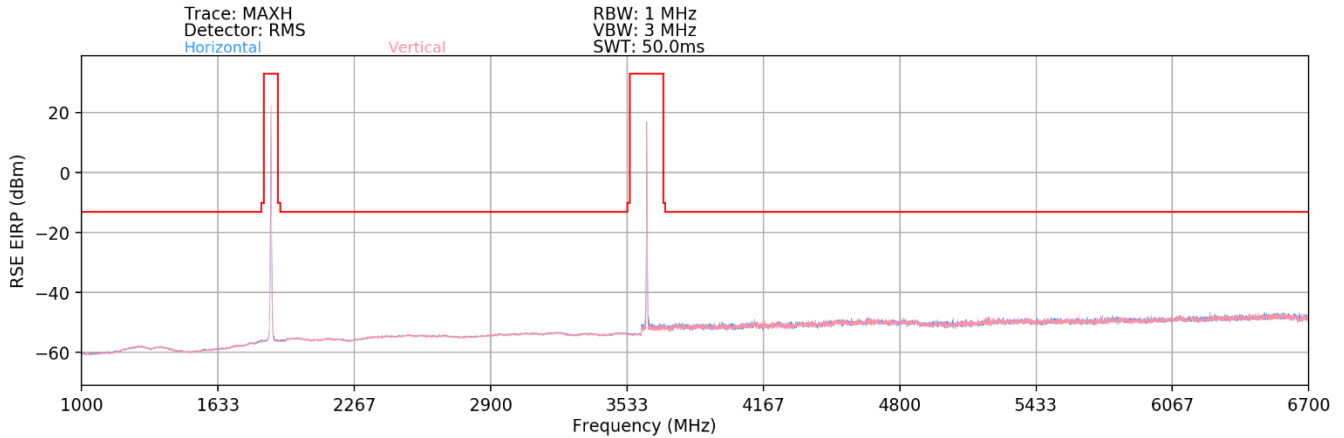

Plot 7-42. Radiated Spurious Plot (NR Band n48 – B2)

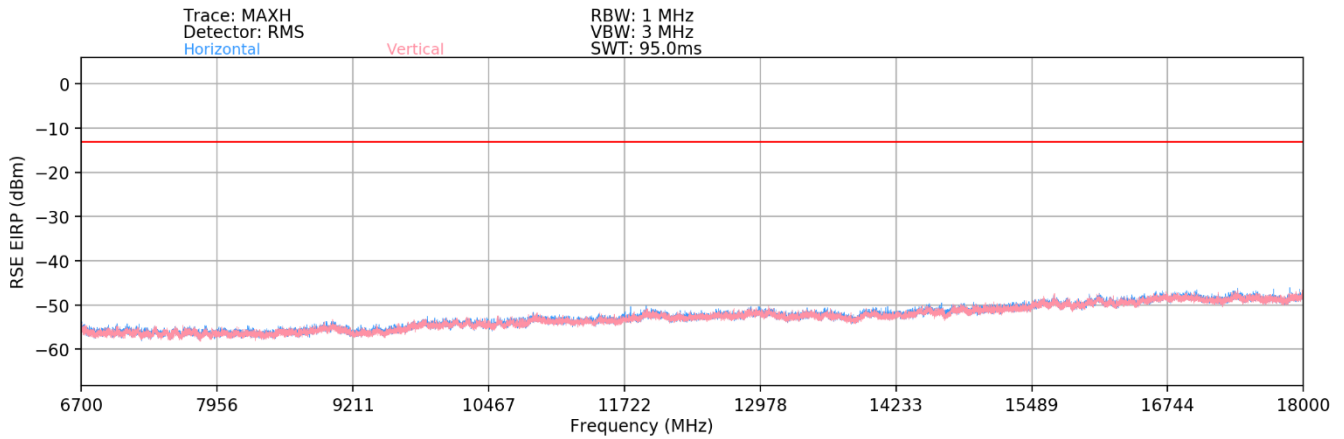



Plot 7-43. Radiated Spurious Plot (NR Band n48 – B2)


Bandwidth (MHz):	40 & 20
Frequency (MHz):	3625 & 1880
RB Config (Size / Offset):	1/53 & 1/50
Detector / Trace Mode:	RMS / Max Hol
RBW / VBW:	1MHz / 3MHz

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5370.0	V	-	-	-77.27	14.90	44.63	-50.63	-13.00	-37.63
7115.0	V	-	-	-77.87	9.31	38.44	-56.82	-13.00	-43.82
8860.0	V	-	-	-78.53	9.35	37.82	-57.44	-13.00	-44.44

Table 7-13. Radiated Spurious Data (NR Band n48 – B2)

FCC ID: A3LSMS901U	 PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset	Page 45 of 53

NR CA: NR Band n48 – NR Band n5

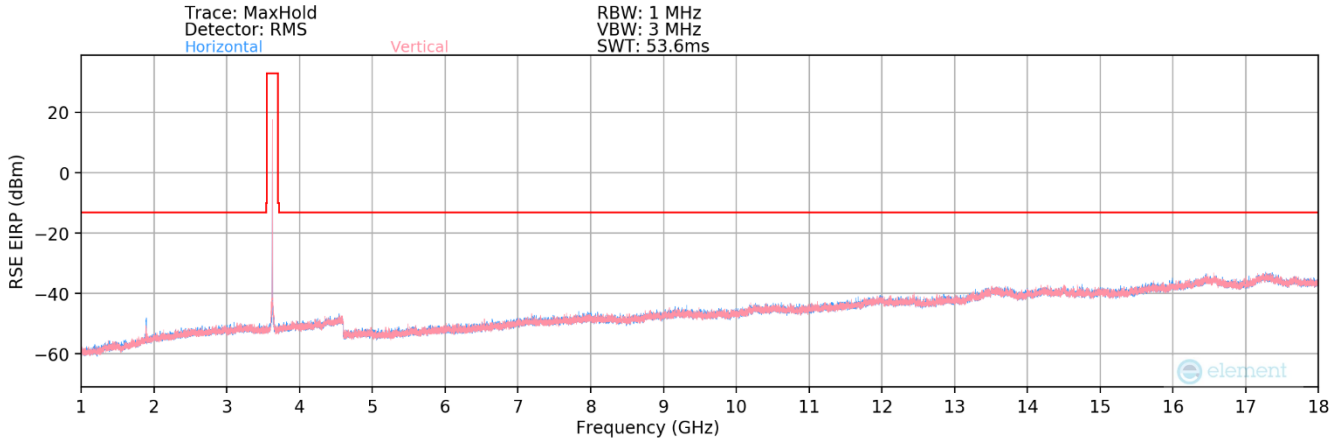



Plot 7-44. Radiated Spurious Plot (NR Band n48 – n5)


Bandwidth (MHz):	40 & 20
Frequency (MHz):	3625 & 836.5
RB Config (Size / Offset):	1/53 & 1/53
Detector / Trace Mode:	RMS / Max Hold
RBW / VBW:	1MHz / 3MHz

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1893.50	H	397	50	-59.00	2.94	50.94	-44.31	-13.00	-31.31
6413.50	H	-	-	-74.14	13.49	46.35	-48.91	-13.00	-35.91
10317.00	H	-	-	-76.22	20.81	51.59	-43.66	-13.00	-30.66
13663.50	H	-	-	-75.14	26.10	57.96	-37.30	-13.00	-24.30

Table 7-14. Radiated Spurious Data (NR Band n48 – n5)

FCC ID: A3LSMS901U	 PCTEST® Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 46 of 53

NR CA: NR Band n48 – NR Band n2

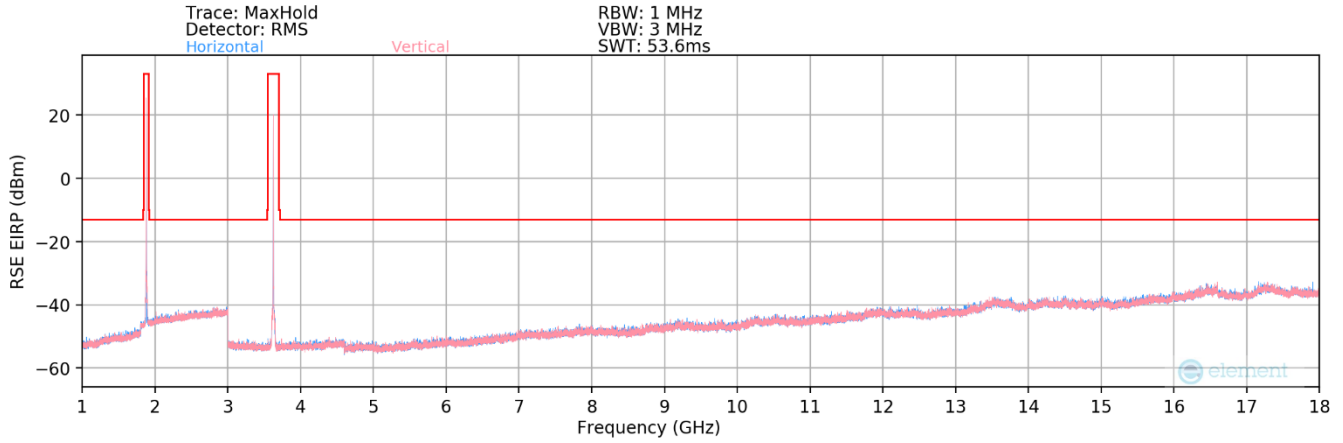



Plot 7-45. Radiated Spurious Plot (NR Band n48 – n2)

Bandwidth (MHz):	40 & 20
Frequency (MHz):	3625 & 1880
RB Config (Size / Offset):	1/53 & 1/53
Detector / Trace Mode:	RMS / Max Hold
RBW / VBW:	1MHz / 3MHz

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
2150.00	V	-	-	-70.17	13.16	49.99	-45.27	-13.00	-32.27
5100.00	V	-	-	-73.99	11.14	44.15	-51.11	-13.00	-38.11
13295.00	V	-	-	-77.50	25.37	54.87	-40.39	-13.00	-27.39

Table 7-15. Radiated Spurious Data (NR Band n48 – n2)

FCC ID: A3LSMS901U	 PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset	Page 47 of 53

7.8 Frequency Stability / Temperature Variation

§2.1055

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 96, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI/TIA-603-E-2016

Test Settings



1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes


None

FCC ID: A3LSMS901U	 PCTEST® Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset	Page 48 of 53	



Frequency Stability / Temperature Variation

NR Band n48					
Operating Frequency (Hz):		3,625,000,000			
Ref. Voltage (VDC):		4.39			
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.39	- 30	3,625,130,750	8,308	0.0002292
		- 20	3,625,130,229	7,787	0.0002148
		- 10	3,625,128,487	6,045	0.0001668
		0	3,625,125,661	3,219	0.0000888
		+ 10	3,625,124,788	2,346	0.0000647
		+ 20 (Ref)	3,625,122,442	0	0.0000000
		+ 30	3,625,123,226	784	0.0000216
		+ 40	3,625,125,263	2,821	0.0000778
		+ 50	3,625,127,200	4,758	0.0001313
Battery Endpoint	3.40	+ 20	3,625,122,561	119	0.0000033

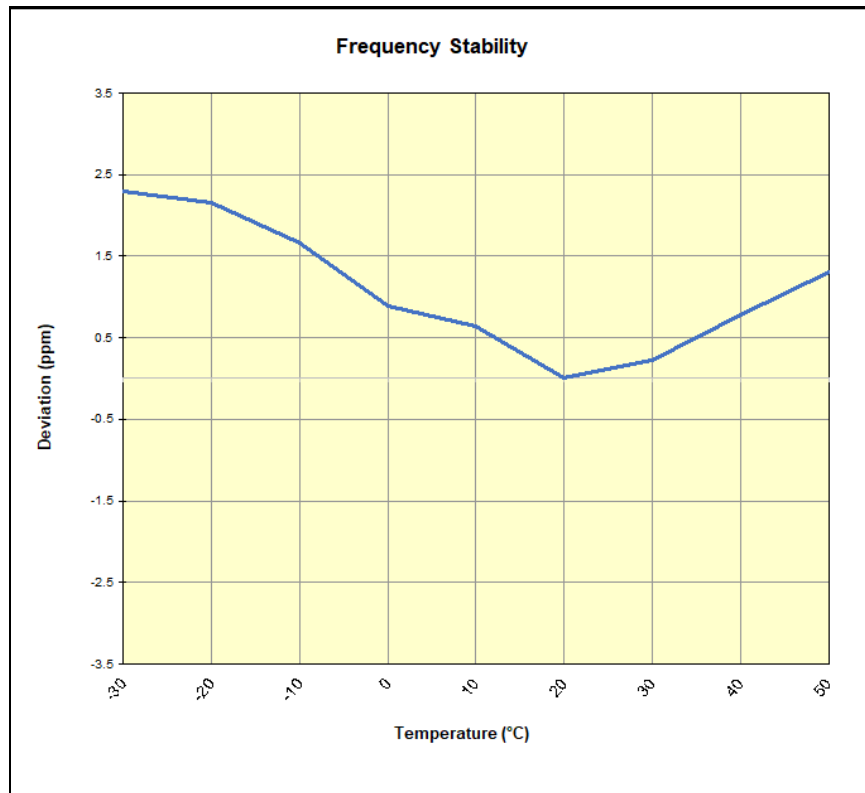Table 7-16. NR Band n48 Frequency Stability Data



Plot 7-46. NR Band n48 Frequency Stability Chart

FCC ID: A3LSMS901U	 PCTEST [®] Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 49 of 53

7.9 End User Device Additional Requirement (CBSD Protocol)

§96.47

Test Overview and Limit

End user device additional requirements (CBSD Protocol) are tested per the test procedures listed below. During testing, the EUT is connected to a certified 5G NR CBSD as a companion device to show compliance with Part 96.47.

End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.

An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.

Test Procedure Used

KDB 940660 D01 v03, WINNF-18-IN-00178 v1.0.0.00



Test Setup/Method

The EUT was connected via an RF cable to a certified 5G CBSD and spectrum analyzer. The following procedure is performed by applying WINNF-18-IN-00178 v1.0.0.00 CBRS End User Device as UUT Test Guidelines


1. Run#1:
 - a. Setup WINNF.PT.C.HBT.1 with 3615MHz – 3635MHz.
 - b. Enable 5G AP service from CBSD.
 - c. Check EUT Tx frequency.
 - d. Disable AP service and check EUT stop transmission within 10s.
2. Run#2:
 - a. Setup WINNF.PT.C.HBT.1 with 3660MHz – 3680MHz.
 - b. Enable 5G AP service from CBSD.
 - c. Check EUT Tx frequency.
 - d. Disable AP service and check EUT stop transmission within 10s.

Test Notes


The EUT is an End User Device.

FCC ID: A3LSMS901U	 PCTEST® Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset	Page 50 of 53	

Run#1:

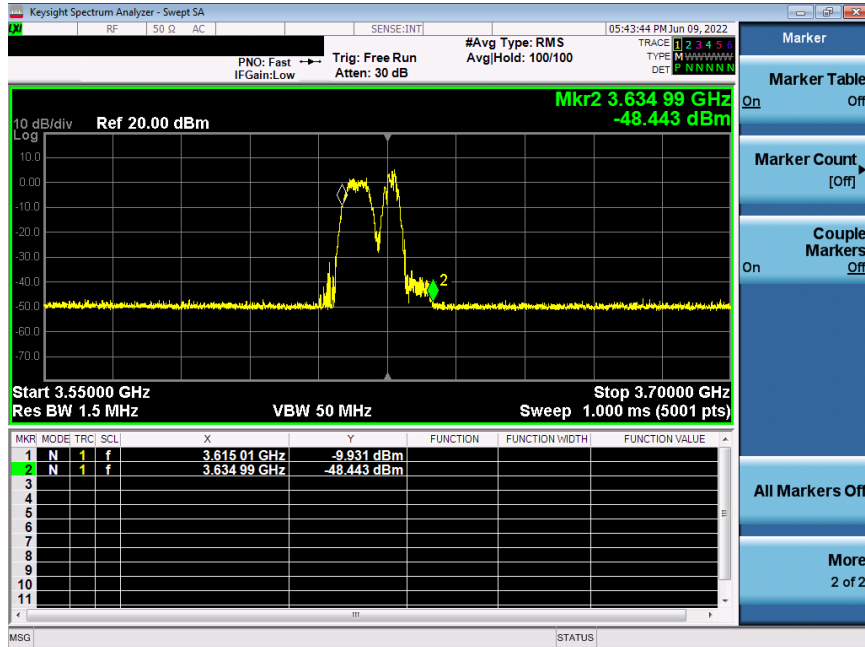

Plot 7-47. Run#1 End User Device Frequency of Operations

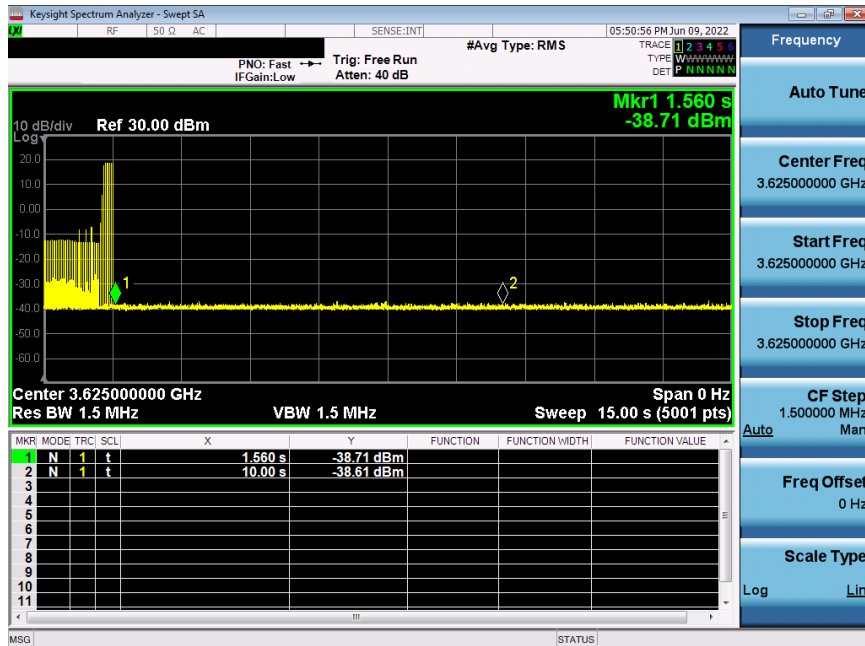


Plot 7-48. Run#1 End User Device Discontinues Operations within 10s

Note:


CBSD sends instructions to discontinue NR operations (beginning of plot at time = 0 seconds)
 Marker 1: EUT discontinues operation.
 Marker 2: 10 seconds elapsed time from CBSD sending instructions to EUT.

FCC ID: A3LSMS901U	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 51 of 53

Run#2:

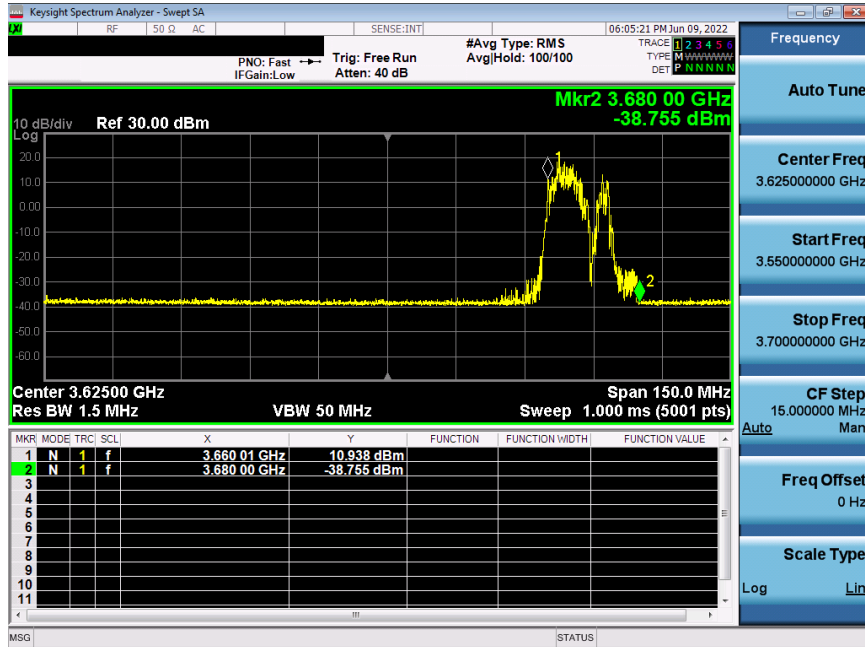

Plot 7-49. Run#2 End User Device Frequency of Operations

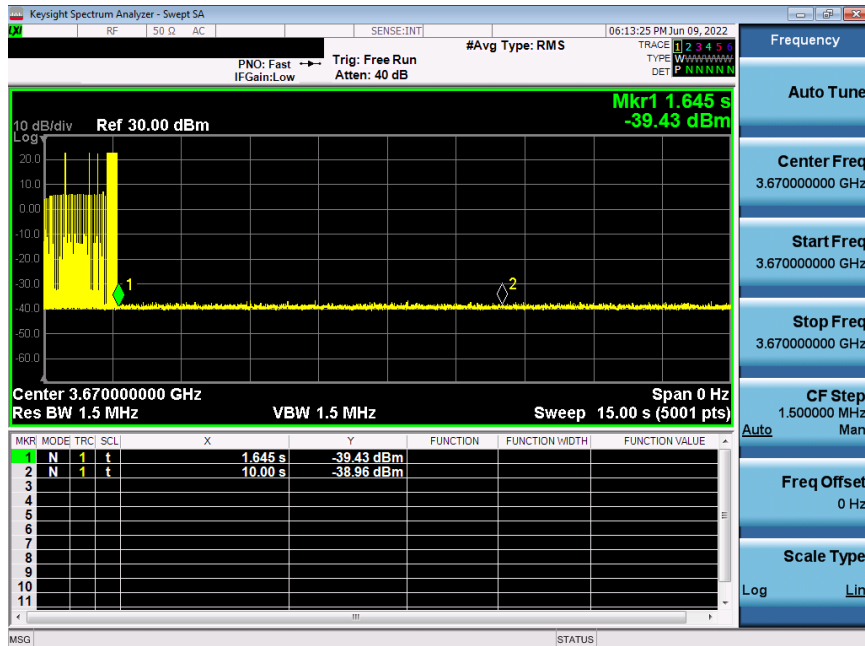

Plot 7-50. Run#2 End User Device Discontinues Operations within 10s



Note:

CBSD sends instructions to discontinue NR operations (beginning of plot at time = 0 seconds)
 Marker 1: EUT discontinues operation.
 Marker 2: 10 seconds elapsed time from CBSD sending instructions to EUT.

FCC ID: A3LSMS901U	PCTEST Proud to be part of element	PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset		Page 52 of 53

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMS901U** complies with all of the End User Device requirements of Part 96 of the FCC Rules for NR operation.

FCC ID: A3LSMS901U		PART 96 MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Technical Manager
Test Report S/N: 1M2112090150-05.A3L	Test Dates: 09/20/2021 - 11/05/2021, 06/09/2022, 06/22/2022-06/29/2022	EUT Type: Portable Handset	Page 53 of 53	