

**MEASUREMENT REPORT
FCC PART 15.407 UNII OFDMA**

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea


Date of Testing:
09/09 – 12/03/2021
Report Issue Date:
12/07/2021
Test Site/Location:
PCTEST Lab. Columbia, MD, USA
Test Report Serial No.:
1M2110010116-10.A3L

FCC ID:	A3LSMS906E
APPLICANT:	Samsung Electronics Co., Ltd.

Application Type: Certification
Model: SM-S906E/DS
Additional Model(s): SM-S906E
EUT Type: Portable Handset
Frequency Range: 5180 – 5825MHz
Modulation Type: OFDMA
FCC Equipment Class: Unlicensed National Information Infrastructure TX (NII)
FCC Rule Part(s): Part 15 Subpart E (15.407)
ISED Specification: RSS-247 Issue 2
Test Procedure(s): ANSI C63.10-2013, KDB 789033 D02 v02r01,
KDB 648474 D03 v01r04, KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President




FCC ID: A3LSMS906E		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset	Page 1 of 237	


TABLE OF CONTENTS

1.0	INTRODUCTION.....	4
1.1	Scope.....	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description.....	5
2.2	Device Capabilities.....	5
2.3	Antenna Description.....	7
2.4	Test Configuration.....	7
2.5	Software and Firmware.....	7
2.6	EMI Suppression Device(s)/Modifications.....	7
3.0	DESCRIPTION OF TESTS.....	8
3.1	Evaluation Procedure.....	8
3.2	Radiated Emissions.....	8
3.3	Environmental Conditions.....	8
4.0	ANTENNA REQUIREMENTS.....	9
5.0	MEASUREMENT UNCERTAINTY.....	10
6.0	TEST EQUIPMENT CALIBRATION DATA.....	11
7.0	TEST RESULTS.....	12
7.1	Summary.....	12
7.2	26dB Bandwidth Measurement – 802.11ax OFDMA.....	14
7.3	6dB Bandwidth Measurement – 802.11ax OFDMA.....	71
7.4	UNII Output Power Measurement – 802.11ax OFDMA.....	108
7.5	Maximum Power Spectral Density – 802.11ax OFDMA.....	117
7.6	Radiated Spurious Emission Measurements – Above 1GHz.....	200
7.6.1	MIMO Radiated Spurious Emission Measurements.....	203
7.6.2	MIMO Radiated Band Edge Measurements (20MHz BW).....	225
7.6.3	MIMO Radiated Band Edge Measurements (40MHz BW).....	228
7.6.4	MIMO Radiated Band Edge Measurements (80MHz BW).....	231
7.7	Radiated Spurious Emissions Measurements – Below 1GHz.....	234
8.0	CONCLUSION.....	237

FCC ID: A3LSMS906E	 Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset	Page 2 of 237	



MEASUREMENT REPORT



UNII Band	Channel Bandwidth (MHz)	Tx Frequency (MHz)	MIMO	
			Max. Power (mW)	Max. Power (dBm)
1	20	5180 - 5240	99.691	19.99
2A		5260 - 5320	94.422	19.75
2C		5500 - 5720	90.232	19.55
3		5745 - 5825	84.749	19.28
4		5845 - 5885	37.068	15.69
1	40	5190 - 5230	72.050	18.58
2A		5270 - 5310	76.001	18.81
2C		5510 - 5710	78.080	18.93
3		5755 - 5795	79.439	19.00
4		5835 - 5875	28.642	14.57
1	80	5210	60.494	17.82
2A		5290	61.067	17.86
2C		5530 - 5690	62.111	17.93
3		5775	59.929	17.78
3/4		5855	23.388	13.69
1/2A	160	5250	62.517	17.96
2C		5570	62.951	17.99
3/4		5815	23.388	13.69

EUT Overview

Note: UNII Band 4 powers shown in the table above are EIRP values.

FCC ID: A3LSMS906E		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 3 of 237

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: A3LSMS906E		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 4 of 237

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMS906E**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

Test Device Serial No.: 1233M, 0278M, 1224M, 0284M, 1229M, 0292M, 0298M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR (FR1), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz and 6GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer, UWB

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
:	:	:	:	:	:	:	:
40	5200	56	5280	120	5600	157	5785
:	:	:	:	:	:	:	:
48	5240	64	5320	144	5720	165	5825

Table 2-1. 802.11ax (20MHz) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
:	:	:	:	:	:	:	:
46	5230	62	5310	118	5590	159	5795
				:	:		
				142	5710		

Table 2-2. 802.11ax (40MHz BW) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775
				:	:		
				138	5690		

Table 2-3. 802.11ax (80MHz BW) Frequency / Channel Operations

Band 1/2A		Band 2C		Band 4	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
50	5250	114	5570	163	5815

Table 2-4. 802.11ac / 802.11ax (160MHz BW) Frequency / Channel Operations

FCC ID: A3LSMS906E		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 5 of 237

Notes:

- 5GHz NII operation is possible in 20MHz, and 40MHz, and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of ANSI C63.10-2013 and KDB 789033 D02 v02r01. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Mode	Antenna	Bandwidth	Duty Cycle
		[MHz]	
802.11ax NII RU	MIMO CDD	20	99.6
			98.7
			98.1
			96.2
802.11ax NII RU	MIMO CDD	40	99.4
			98.9
			98.2
			96.5
802.11ax NII RU	MIMO CDD	80	93.9
			98.7
			99.1
			98.1
			96.4
802.11ax NII RU	MIMO CDD	160 1st	89.9
			93.9
			98.1
			96.3
			99.3
802.11ax NII RU	MIMO CDD	160 2nd	90.2
			93.2
			97.5
			95.7
			98.5

Table 2-5. Measured Duty Cycles

FCC ID: A3LSMS906E		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset	Page 6 of 237	

2. The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SDM		MIMO	
		ANT1	ANT2	ANT1	ANT2
5GHz	11ax (20MHz)	✓	✓	✓	✓
	11ax (40MHz)	✓	✓	✓	✓
	11ax (80MHz)	✓	✓	✓	✓

Table 2-6. Frequency / Channel Operations

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

3. This device supports simultaneous transmission operation, which allows for two SISO channels to operate independent of one another in the 2.4GHz (WLAN & BT) and 5GHz bands simultaneously on each antenna. The following tables show the worst case configurations determined during testing. The data for these configurations is contained in this test report. The BT + 5GHz case is not considered as worst case since the BT power is lower than the 2.4GHz WLAN power.

2.3 Antenna Description

Following antenna was used for the testing.

Frequency [GHz]	Antenna 1 Gain (dBi)	Antenna 2 Gain (dBi)	Directional Gain [dBi]
5.15	-6.4	-6.7	-3.54
5.30	-6.4	-6.5	-3.44
5.50	-6.5	-7.0	-3.74
5.725	-6.8	-7.0	-3.89
5.96	-7.2	-7.4	-4.29

Table 2-7. Antenna Peak Gain

2.4 Test Configuration

The EUT was tested per the guidance of KDB 789033 D02 v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.5 Software and Firmware

The test was conducted with firmware version S906USQU0AUJ9 installed on the EUT.

2.6 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: A3LSMS906E		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 7 of 237

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

3.3 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMS906E	 <small>Proud to be part of element</small>	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset	Page 8 of 237	

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: A3LSMS906E	 <small>Proud to be part of  element</small>	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset	Page 9 of 237	

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMS906E	 PCTEST Proud to be part of  element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 10 of 237

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurement antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	WL25-1	Conducted Cable Set (25GHz)	9/7/2021	Annual	9/7/2022	WL25-1
-	WL25-2	Conducted Cable Set (25GHz)	9/7/2021	Annual	9/7/2022	WL25-2
-	WL25-3	Conducted Cable Set (25GHz)	9/7/2021	Annual	9/7/2022	WL25-3
-	WL40-1	Conducted Cable Set (40GHz)	9/10/2021	Annual	9/10/2022	WL40-1
Agilent	N9038A	MXE EMI Receiver	8/11/2020	Annual	12/1/2021	MY51210133
Agilent	N9030A	PXA Signal Analyzer (44GHz)	7/21/2021	Annual	7/21/2022	MY49430494
Anritsu	ML2495A	Power Meter	1/18/2021	Annual	1/18/2022	941001
Anritsu	MA2411B	Pulse Power Sensor	3/8/2021	Annual	3/8/2022	1339007
Emco	3115	Horn Antenna (1-18GHz)	6/18/2020	Biennial	6/18/2022	9704-5182
Emco	3116C	Horn Antenna (18 - 40GHz)	5/11/2021	Biennial	5/11/2023	218893
ETS-Lindgren	3816/2NM	Line Impedance Stabilization Network	7/9/2020	Biennial	7/9/2022	114451
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	8/17/2020	Annual	12/17/2021	MY52350166
Pasternack	NMLC-2	Line Conducted Emissions Cable (NM)	9/10/2021	Annual	9/10/2022	NMLC-2
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	7/21/2021	Annual	7/12/2022	MY49430494
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	8/3/2021	Annual	8/3/2022	100342
Rohde & Schwarz	ESW44	EMI Test Receiver 2Hz to 44GHz	1/21/2021	Annual	1/21/2022	101716
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	8/25/2021	Annual	8/25/2022	103200
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	9/3/2021	Annual	9/3/2022	102138
Solar Electronics	8012-50-R-24-BNC	Line Impedance Stabilization Network	9/21/2021	Biennial	9/21/2023	310233
Schwarzbeck	VULB9162	Bilog Antenna	4/17/2020	Biennial	4/17/2022	00301

Table 6-1. Annual Test Equipment Calibration Schedule

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMS906E		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset	Page 11 of 237	

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMS906E
 FCC Classification: Unlicensed National Information Infrastructure (UNII)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
N/A	RSS-Gen [6.7]	26dB Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
15.407(e)	RSS-Gen [6.7]	6dB Bandwidth	>500kHz(5725-5850MHz)		PASS	Section 7.3
15.407 (a.1.iv), (a.2), (a.3)	RSS-247 [6.2]	Maximum Conducted Output Power	Maximum conducted powers must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.4
15.407 (a.1.iv), (a.2), (a.3)	RSS-247 [6.2]	Maximum Power Spectral Density	Maximum power spectral density must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.5
15.407(h)	RSS-247 [6.3]	Dynamic Frequency Selection	See DFS Test Report		PASS	See DFS Test Report
15.407(b.1), (2), (3), (4)	RSS-247 [6.2]	Undesirable Emissions	Undesirable emissions must meet the limits detailed in 15.407(b) (RSS-247 [6.2])	RADIATED	PASS	Section 7.6
15.205, 15.407(b.1), (4), (5), (6)	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])		PASS	Section 7.6, 7.7

Table 7-1. Summary of Test Results

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "UNII Automation," Version 4.7.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 1.3.1.
- 6) Per RSS-247 Section 6.2.3, transmission on channels which overlap the 5600-5650 MHz is prohibited. This device operates under these frequencies only under the control of a certified master device and does not support active scanning on these channels. This device does not transmit any beacons or initiate any transmissions in UNII Bands 2A or 2C.

FCC ID: A3LSMS906E		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset	Page 12 of 237	

- 7) 802.11ax OFDMA testing was performed for all signal tone configurations as specified by the 802.11ax standard. Worst case results are determined and reported per the guidance provided at the October 2018 TCB Workshop.
- 8) Only one RU index could be selected at a time so no contiguous or non-contiguous RU's were considered for testing.

FCC ID: A3LSMS906E		MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset	Page 13 of 237

7.2 26dB Bandwidth Measurement – 802.11ax OFDMA

RSS-Gen [6.2]

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

Test Procedure Used

ANSI C63.10-2013 – Section 12.4

KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

The 26dB Bandwidth measurement for each channel was measured with the RU index showing the highest conducted power.


FCC ID: A3LSMS906E		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 14 of 237

MIMO Antenna-1 26 dB Bandwidth Measurements (26 Tones)


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	ax (20MHz)	26T	MCS0	19.22
	5200	40	ax (20MHz)	26T	MCS0	20.91
	5240	48	ax (20MHz)	26T	MCS0	20.67
	5190	38	ax (40MHz)	26T	MCS0	22.34
	5230	46	ax (40MHz)	26T	MCS0	20.49
	5210	42	ax (80MHz)	26T	MCS0	41.73
Band 1/2A	5250	50	ax (160MHz L)	26T	MCS0	26.63
	5250	50	ax (160MHz U)	26T	MCS0	34.52
Band 2A	5260	52	ax (20MHz)	26T	MCS0	20.70
	5280	56	ax (20MHz)	26T	MCS0	19.84
	5320	64	ax (20MHz)	26T	MCS0	20.34
	5270	54	ax (40MHz)	26T	MCS0	22.57
	5310	62	ax (40MHz)	26T	MCS0	21.74
	5290	58	ax (80MHz)	26T	MCS0	20.26
Band 2C	5500	100	ax (20MHz)	26T	MCS0	18.77
	5600	120	ax (20MHz)	26T	MCS0	19.57
	5720	144	ax (20MHz)	26T	MCS0	18.62
	5510	102	ax (40MHz)	26T	MCS0	19.61
	5590	118	ax (40MHz)	26T	MCS0	19.25
	5710	142	ax (40MHz)	26T	MCS0	18.83
	5530	106	ax (80MHz)	26T	MCS0	38.84
	5610	122	ax (80MHz)	26T	MCS0	38.28
	5690	138	ax (80MHz)	26T	MCS0	19.18
	5570	114	ax (160MHz L)	26T	MCS0	9.64
5570	114	ax (160MHz U)	26T	MCS0	21.15	

Table 7-2. Conducted Bandwidth Measurements MIMO ANT1 (26 Tones)

FCC ID: A3LSMS906E		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 15 of 237

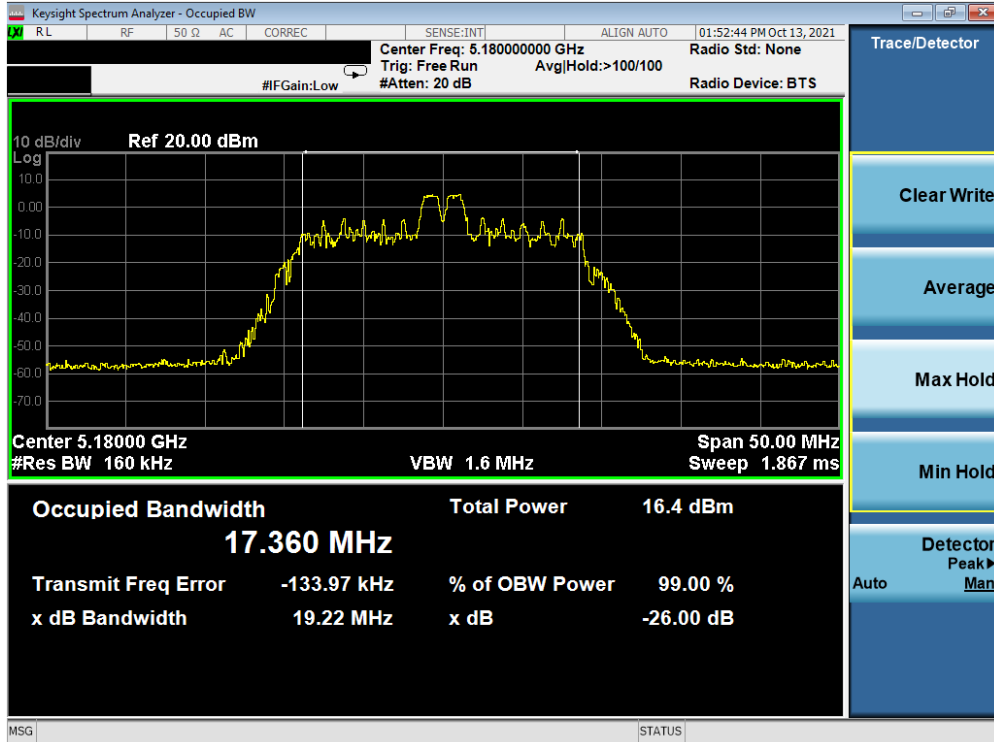


Plot 7-1. 26dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 36)

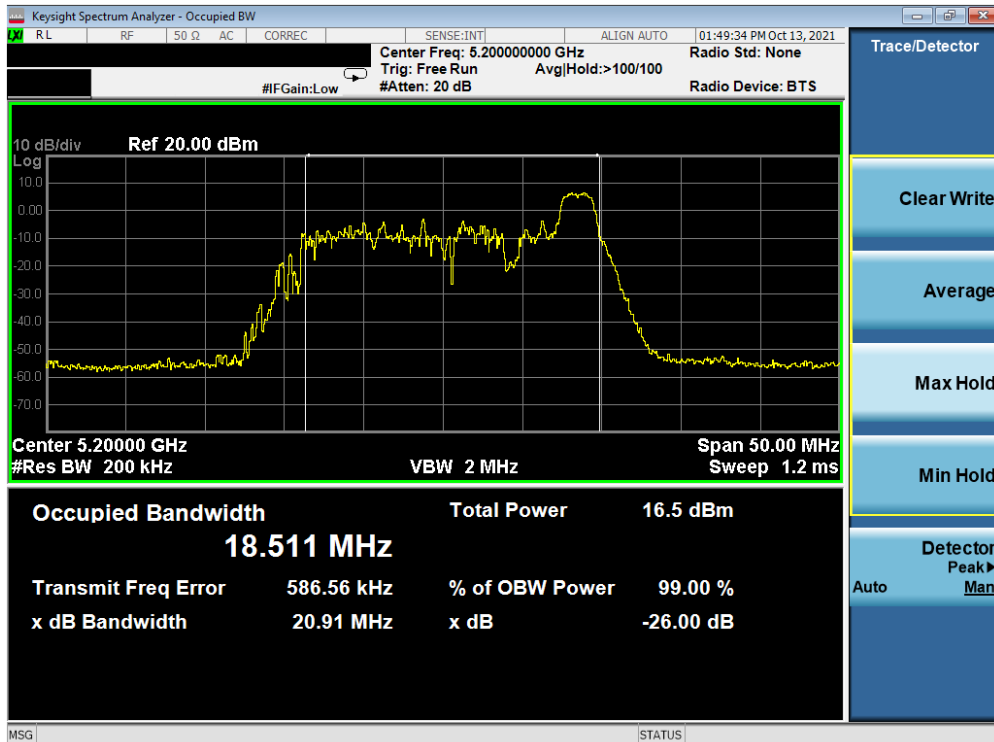


Plot 7-2. 26dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 40)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 16 of 237

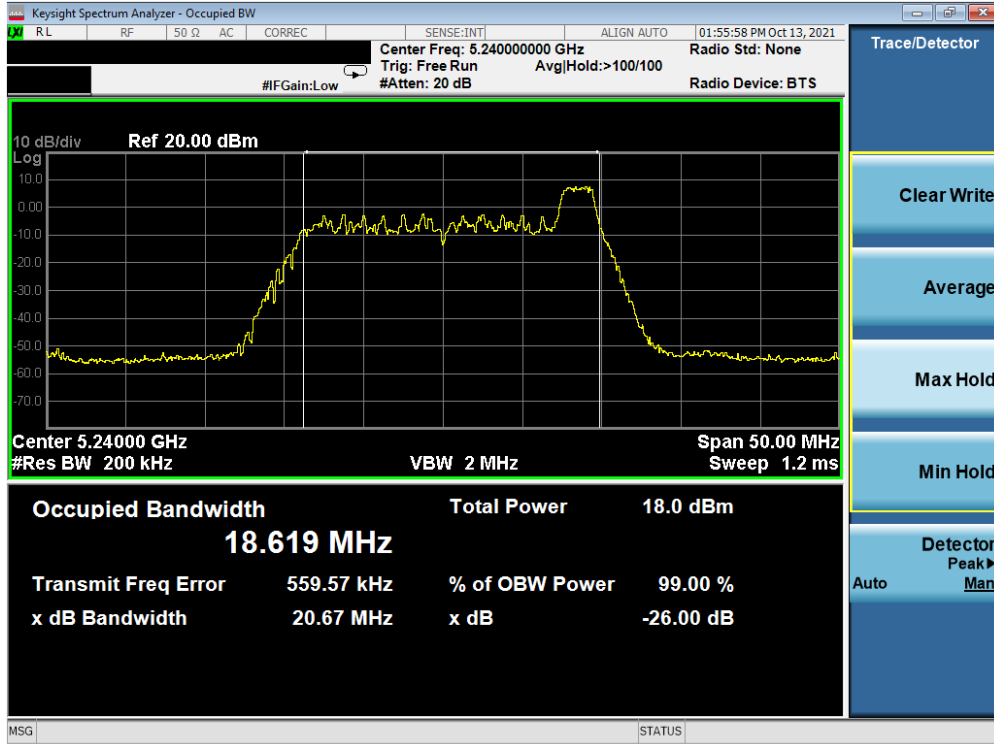


Plot 7-3. 26dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 48)

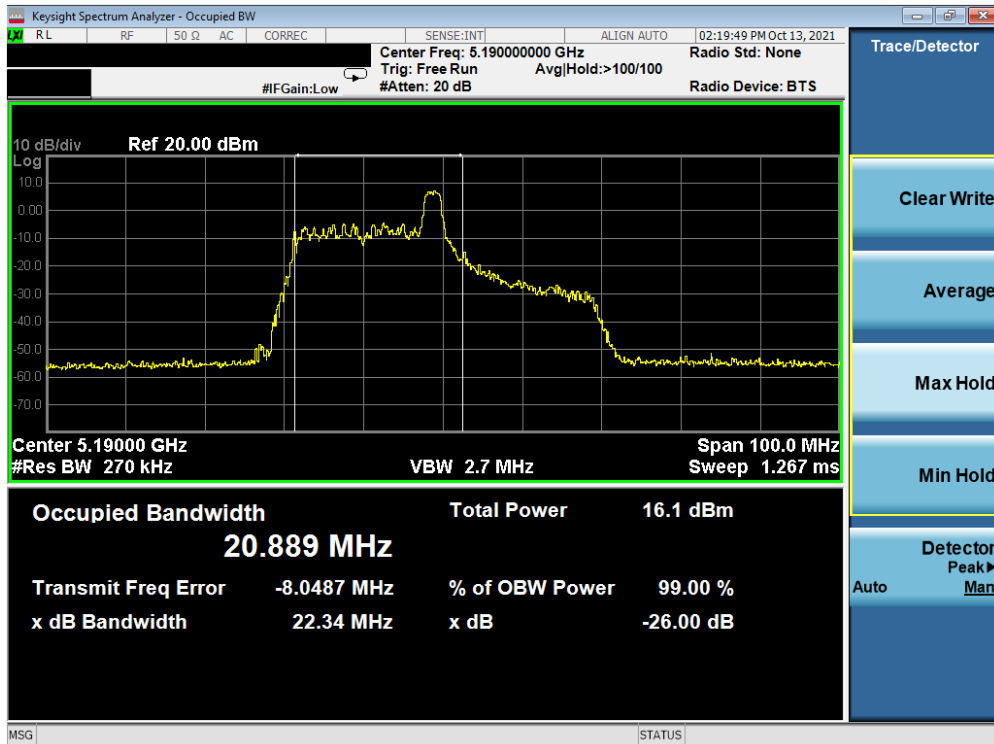


Plot 7-4. 26dB Bandwidth Plot MIMO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 38)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 17 of 237

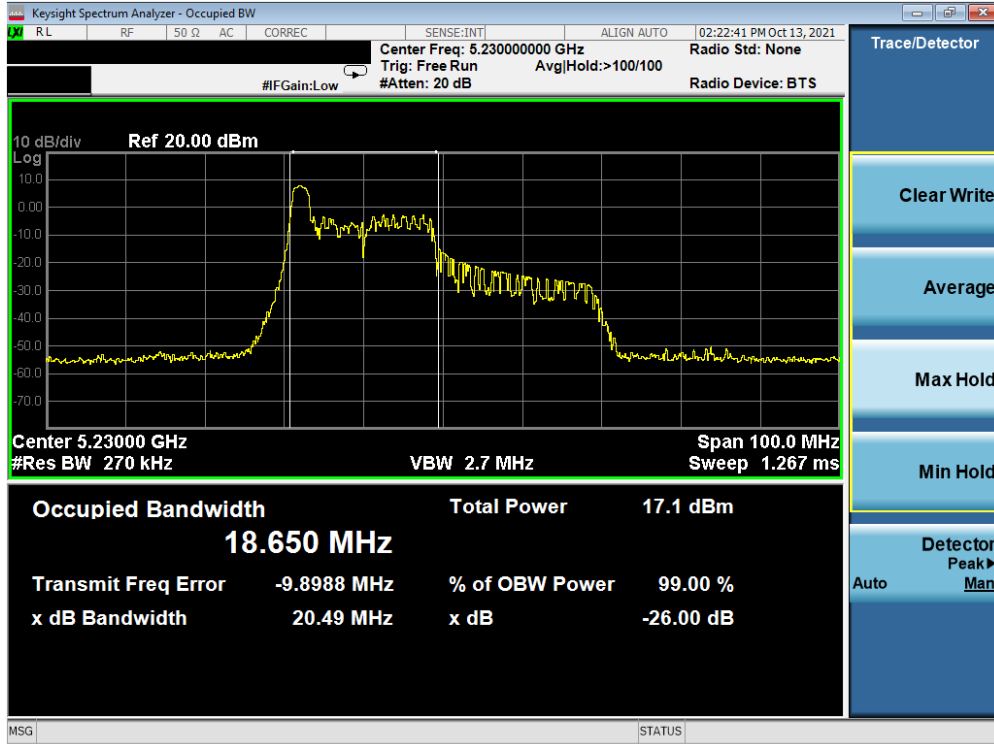


Plot 7-5. 26dB Bandwidth Plot MIMO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 46)

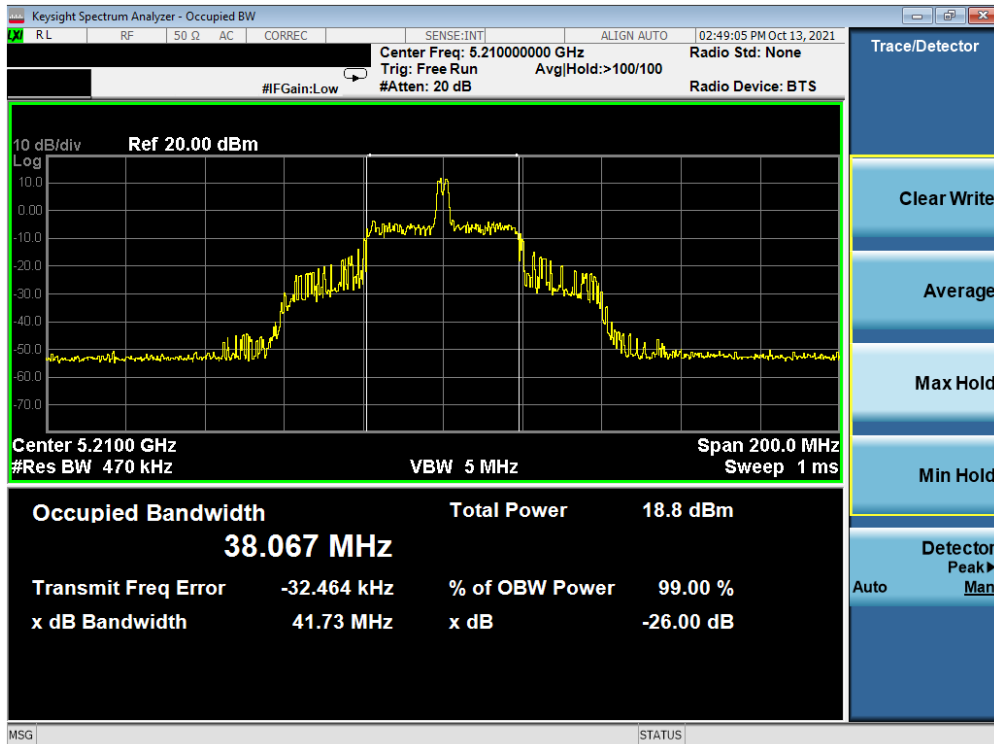


Plot 7-6. 26dB Bandwidth Plot MIMO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 42)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 18 of 237

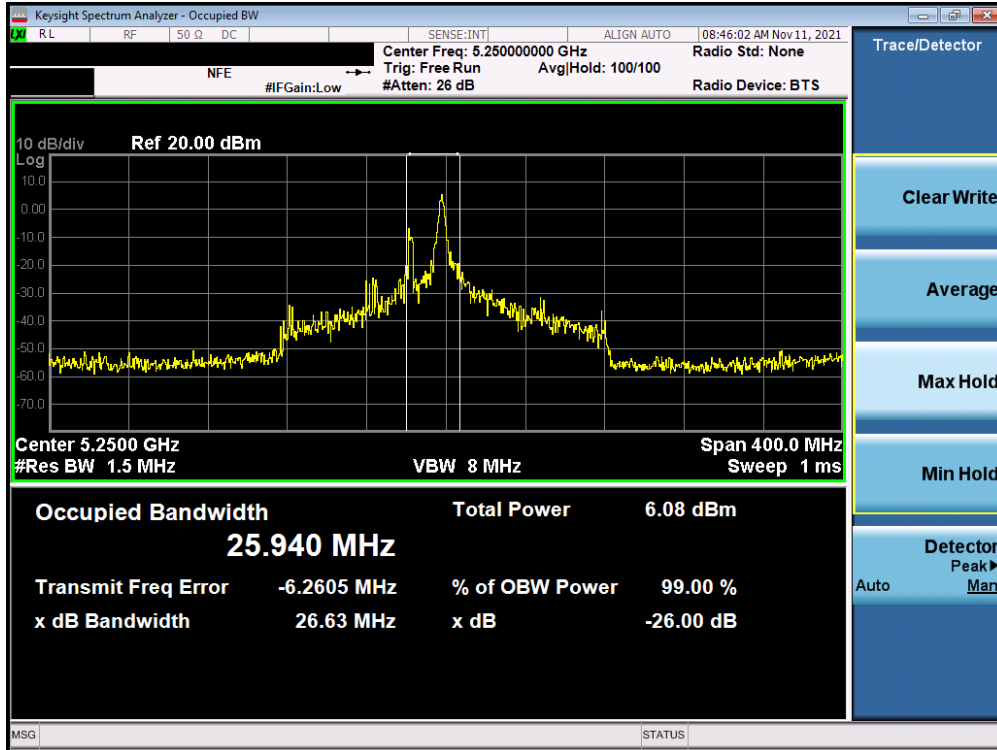


Plot 7-7. 26dB Bandwidth Plot MIMO ANT1 (160MHz BW (L) 802.11ax – 26 Tones (UNII Band 1/2A) – Ch. 50)

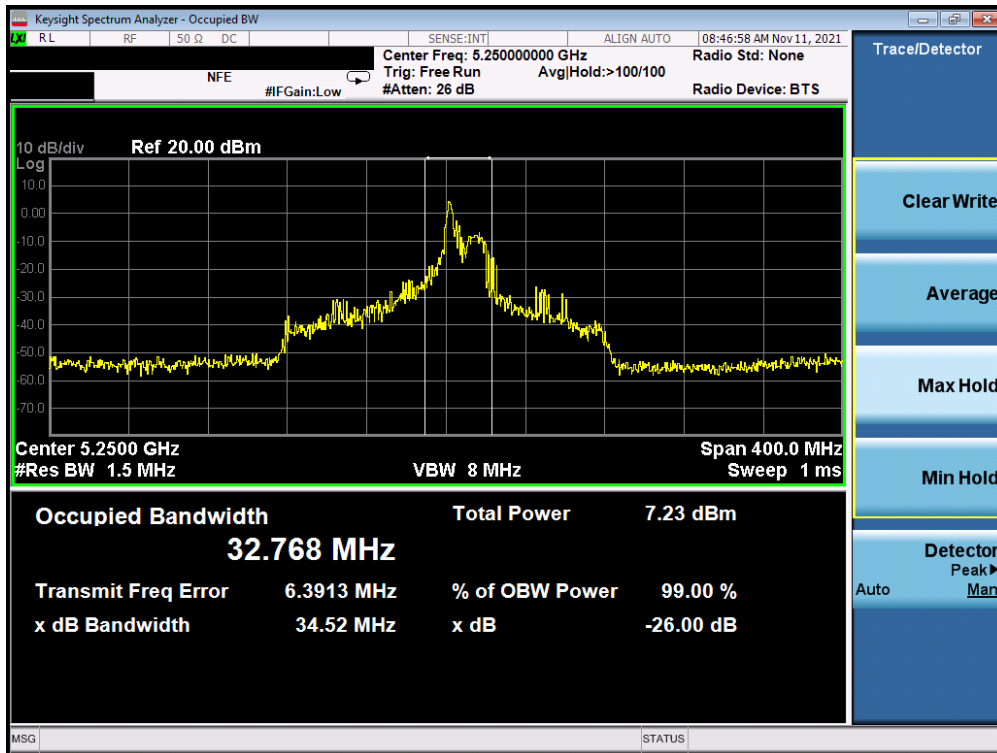


Plot 7-8. 26dB Bandwidth Plot MIMO ANT1 (160MHz BW (U) 802.11ax – 26 Tones (UNII Band 1/2A) – Ch. 50)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 19 of 237

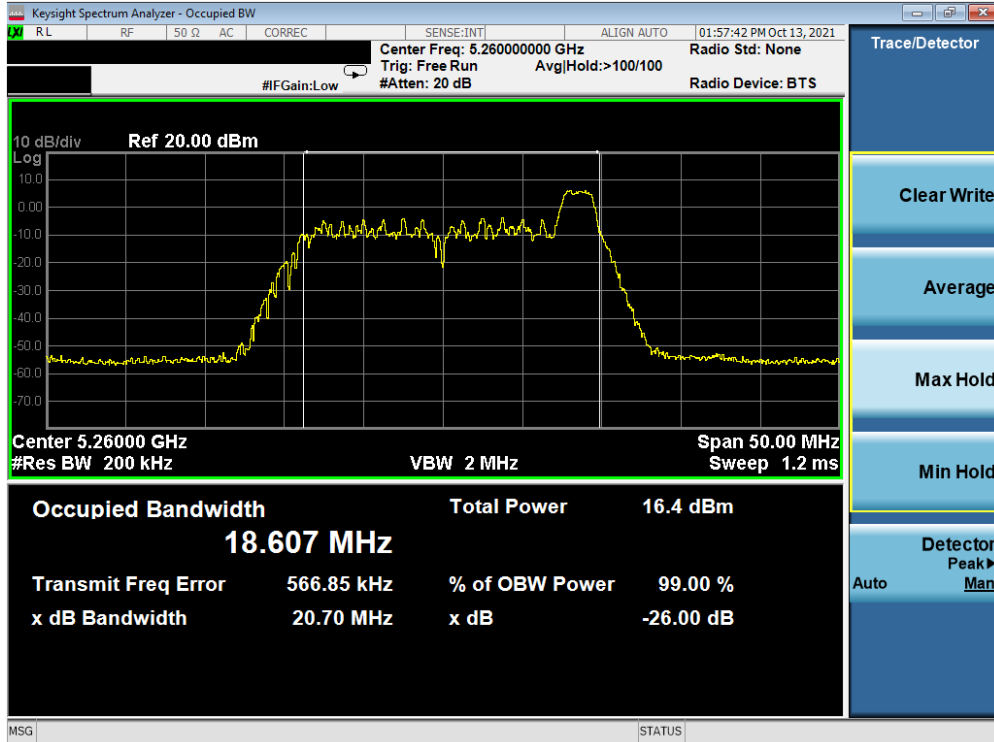


Plot 7-9. 26dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 52)

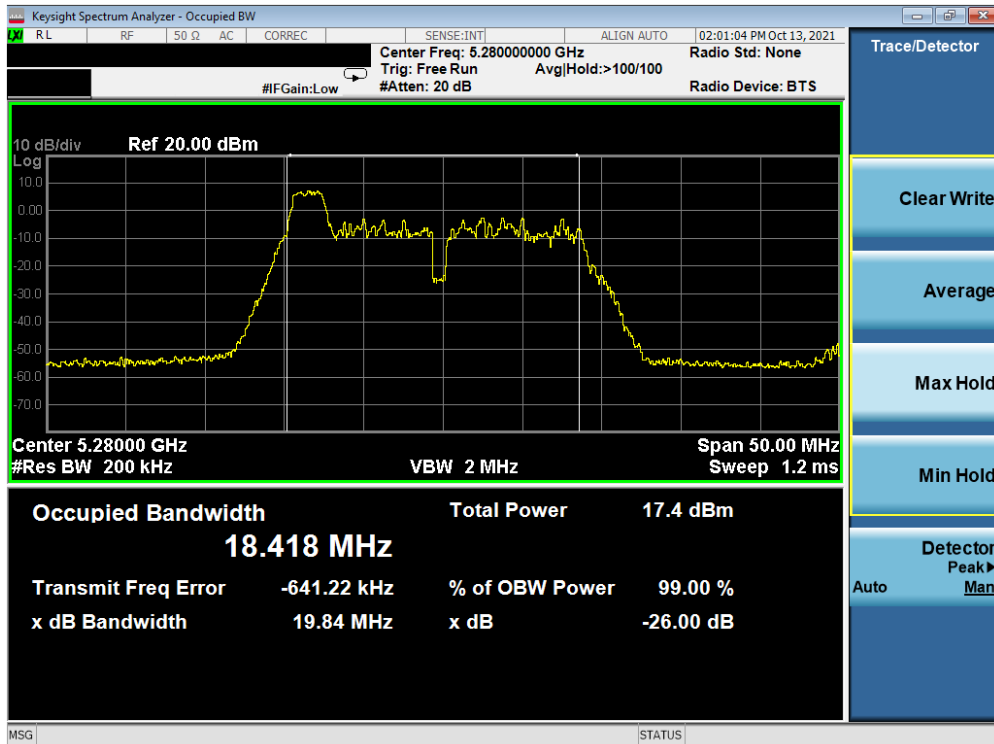


Plot 7-10. 26dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 20 of 237

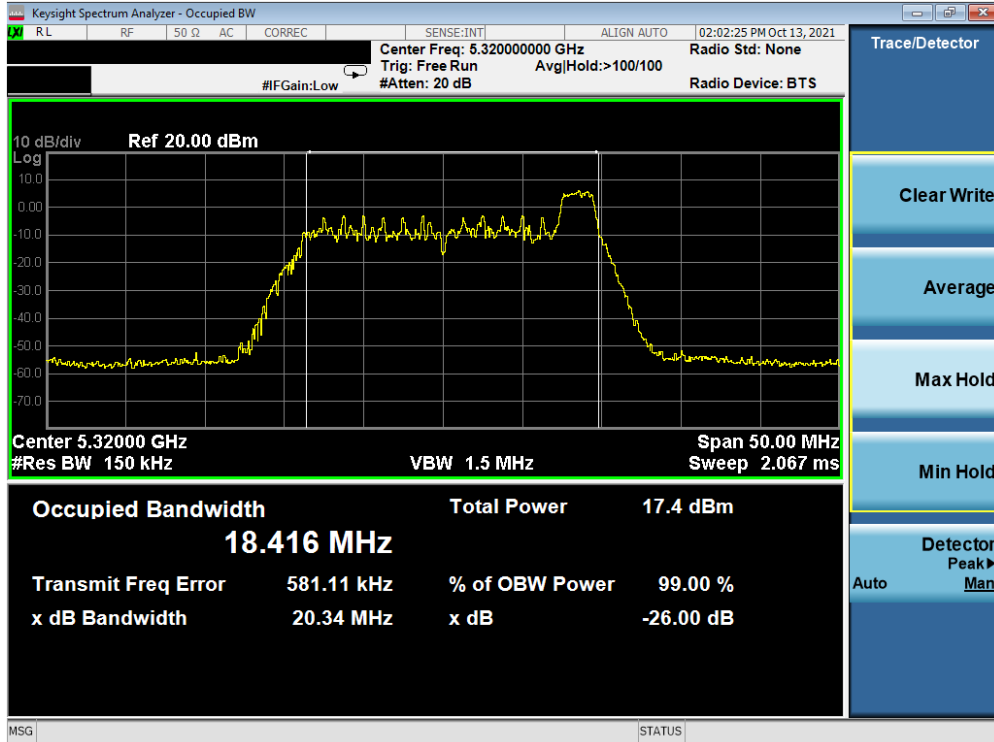


Plot 7-11. 26dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 64)

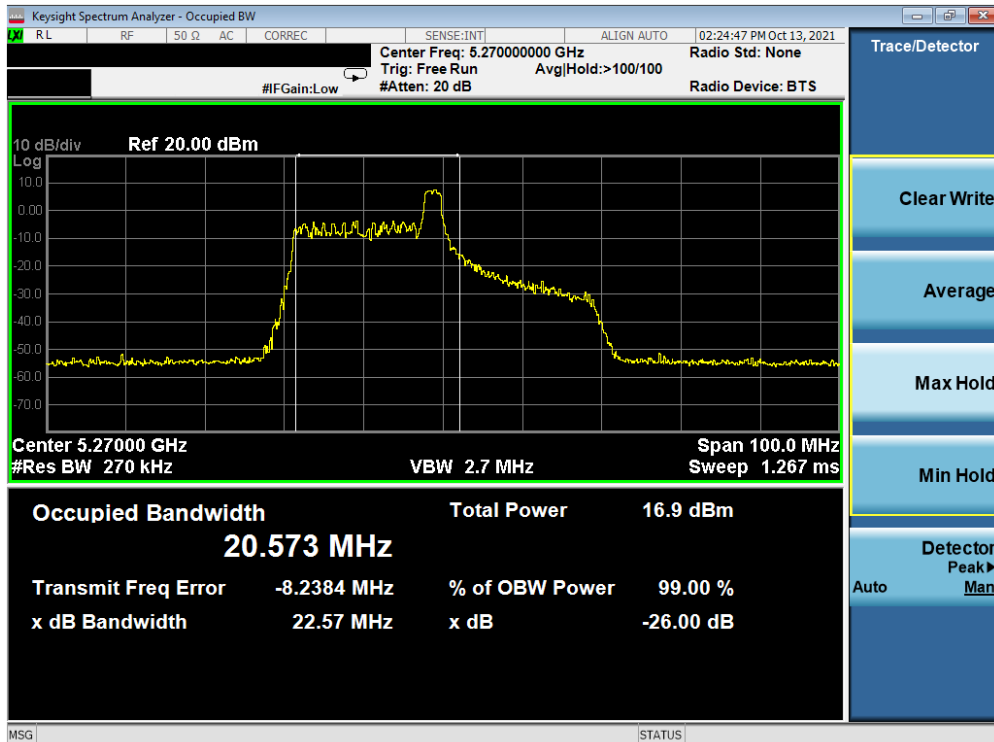


Plot 7-12. 26dB Bandwidth Plot MIMO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 21 of 237

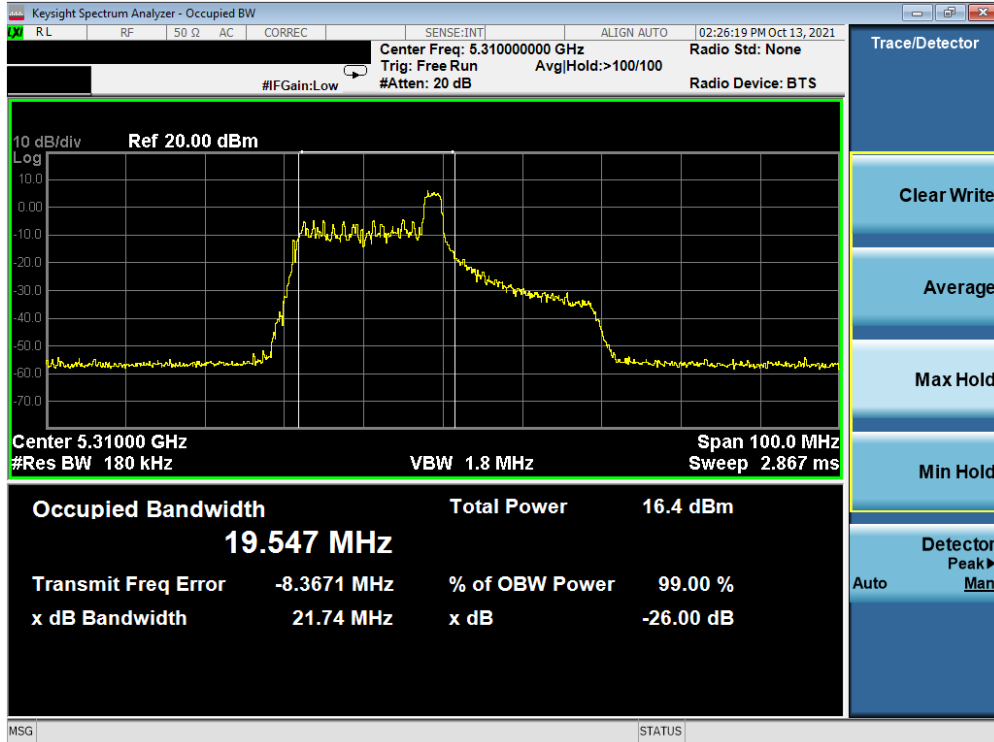


Plot 7-13. 26dB Bandwidth Plot MIMO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 62)

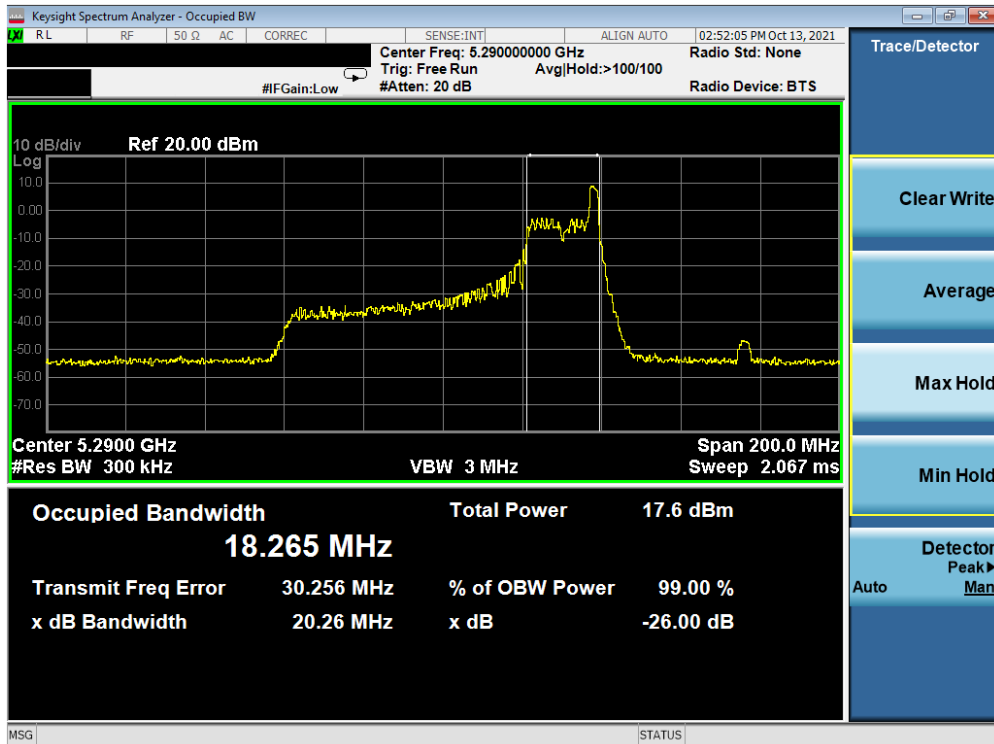


Plot 7-14. 26dB Bandwidth Plot MIMO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 22 of 237

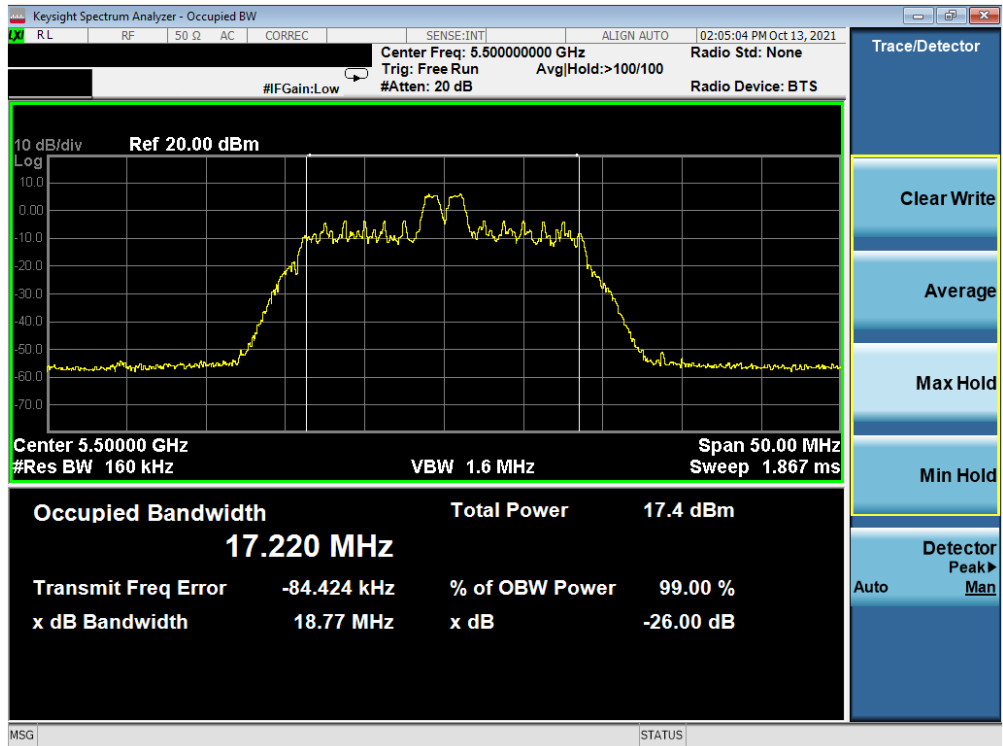


Plot 7-15. 26dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 100)

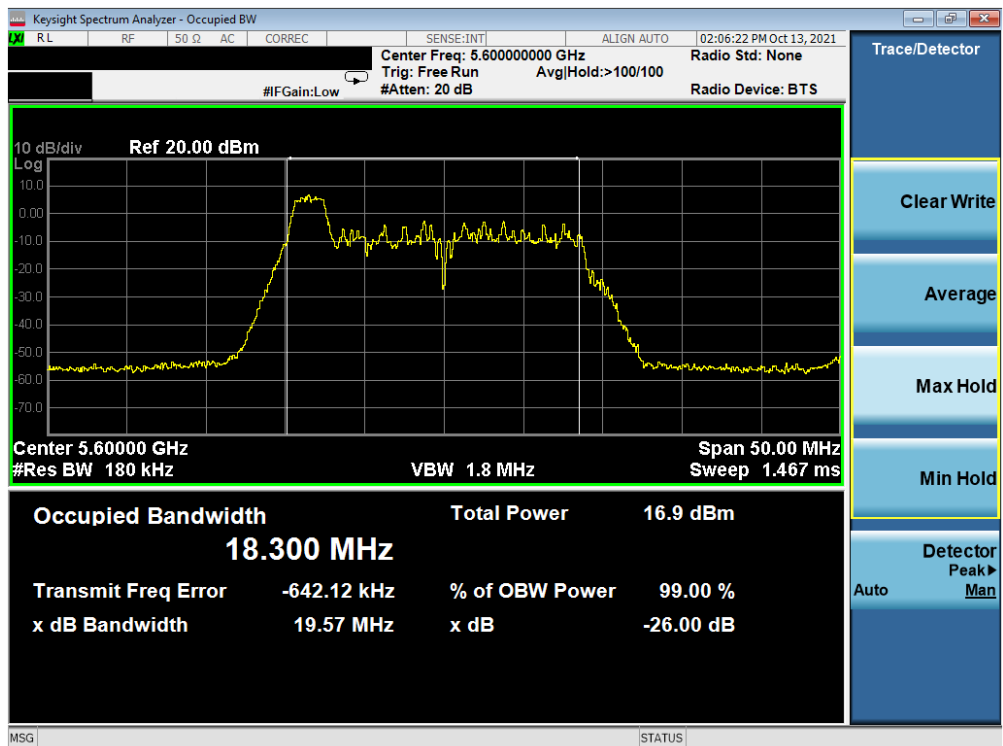


Plot 7-16. 26dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 23 of 237

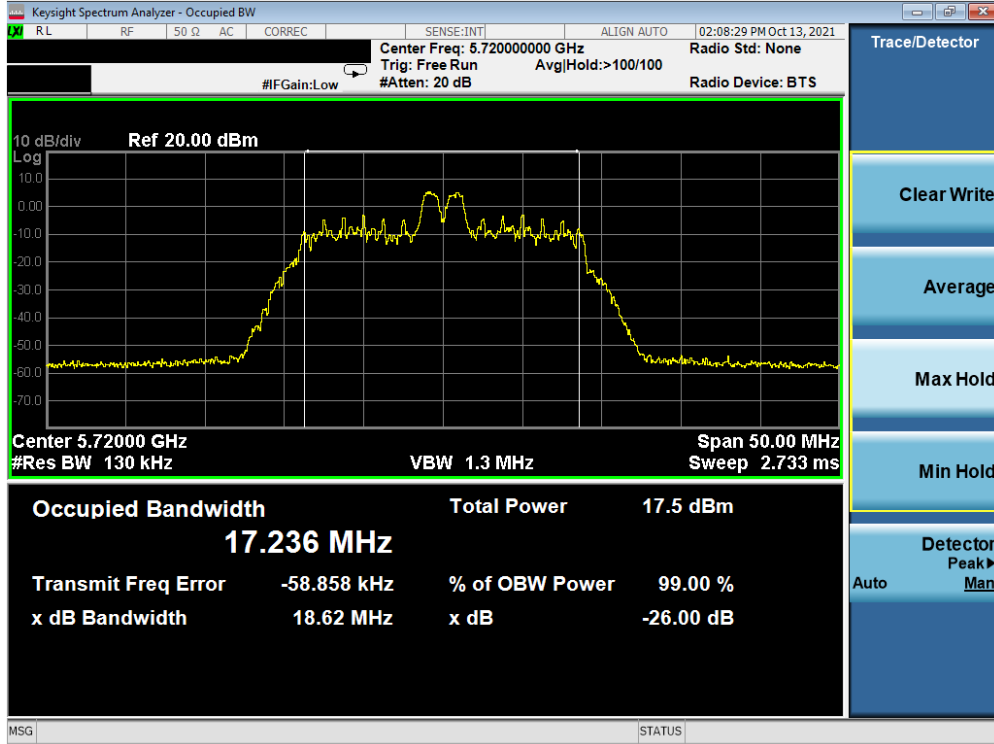


Plot 7-17. 26dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 144)

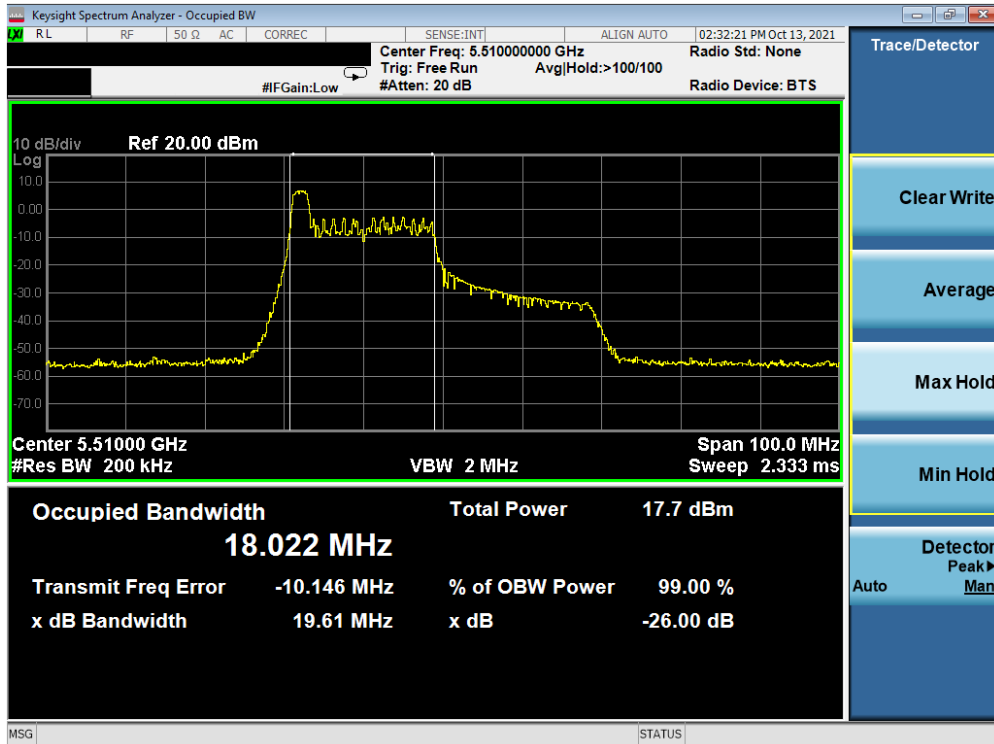


Plot 7-18. 26dB Bandwidth Plot MIMO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 102)

FCC ID: A3LSMS906E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 24 of 237

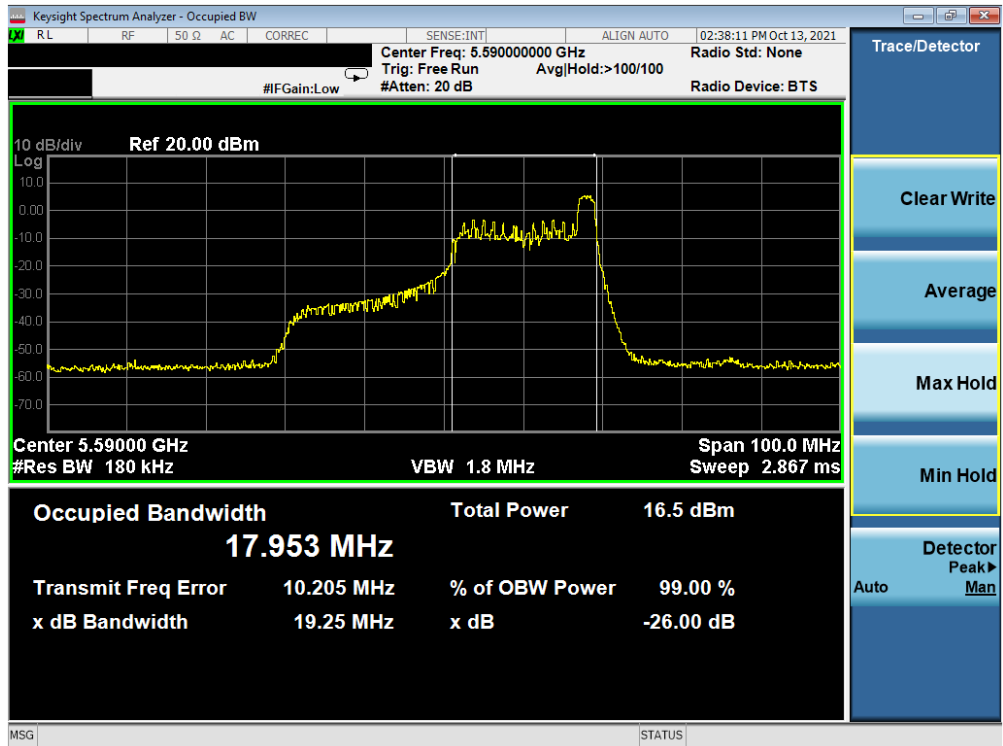


Plot 7-19. 26dB Bandwidth Plot MIMO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 118)

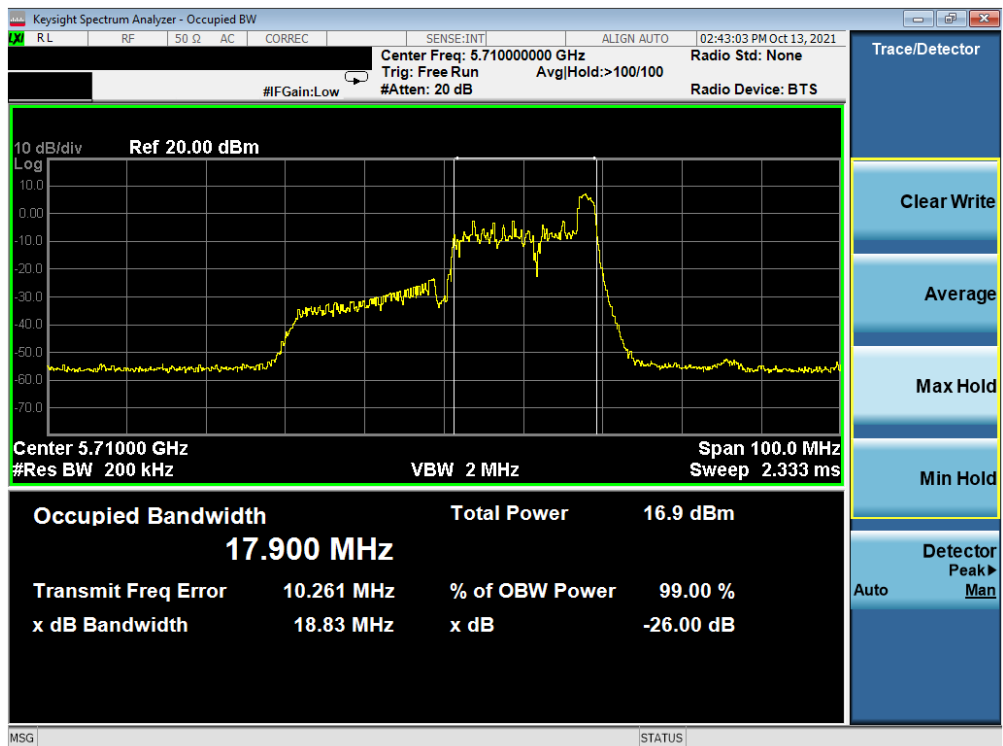


Plot 7-20. 26dB Bandwidth Plot MIMO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 142)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 25 of 237

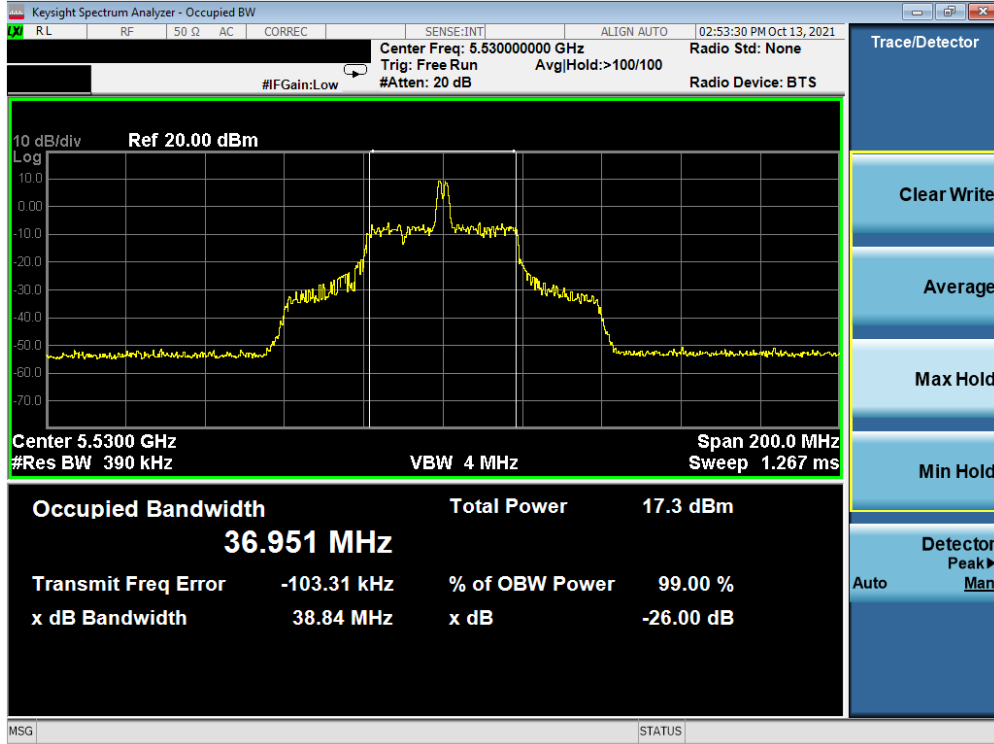


Plot 7-21. 26dB Bandwidth Plot MIMO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 106)

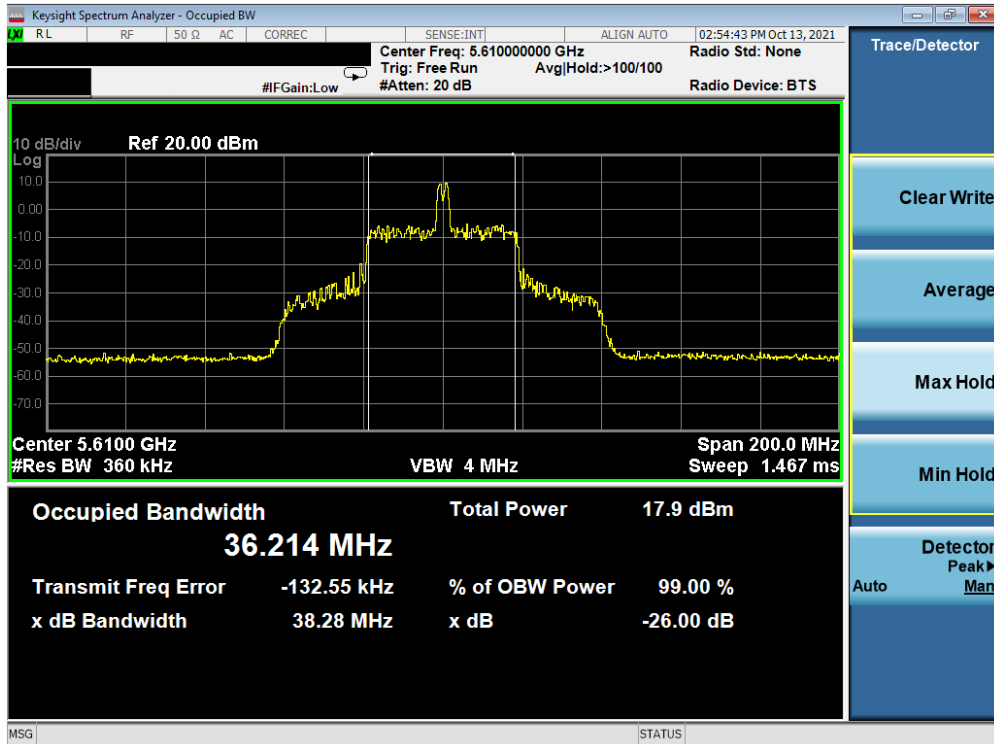


Plot 7-22. 26dB Bandwidth Plot MIMO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 26 of 237

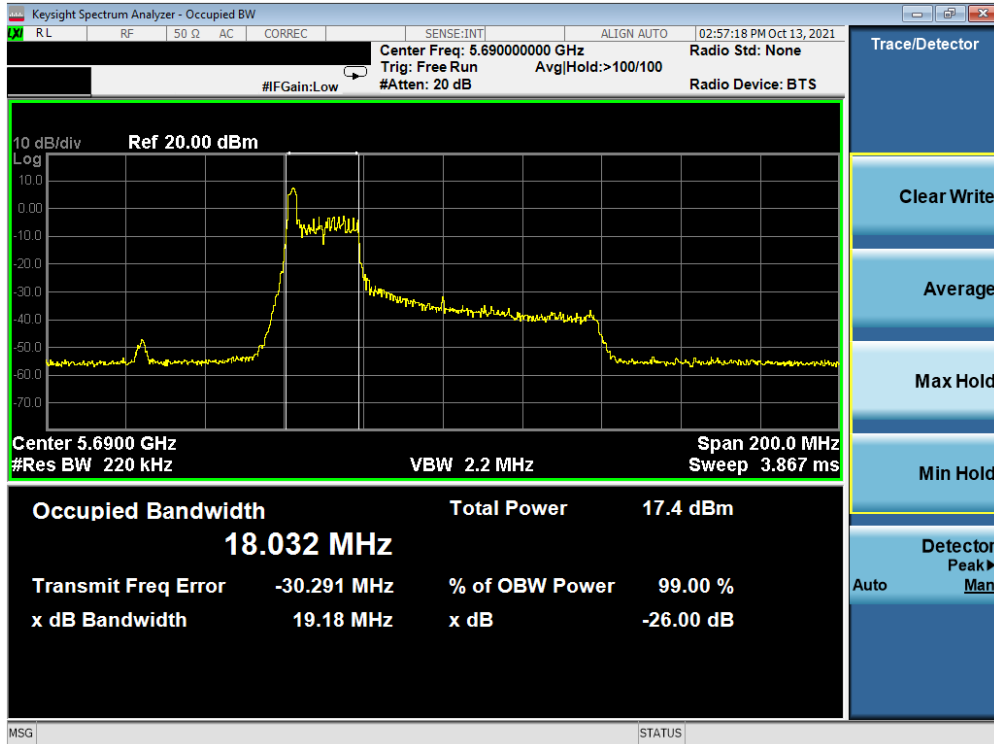


Plot 7-23. 26dB Bandwidth Plot MIMO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 138)

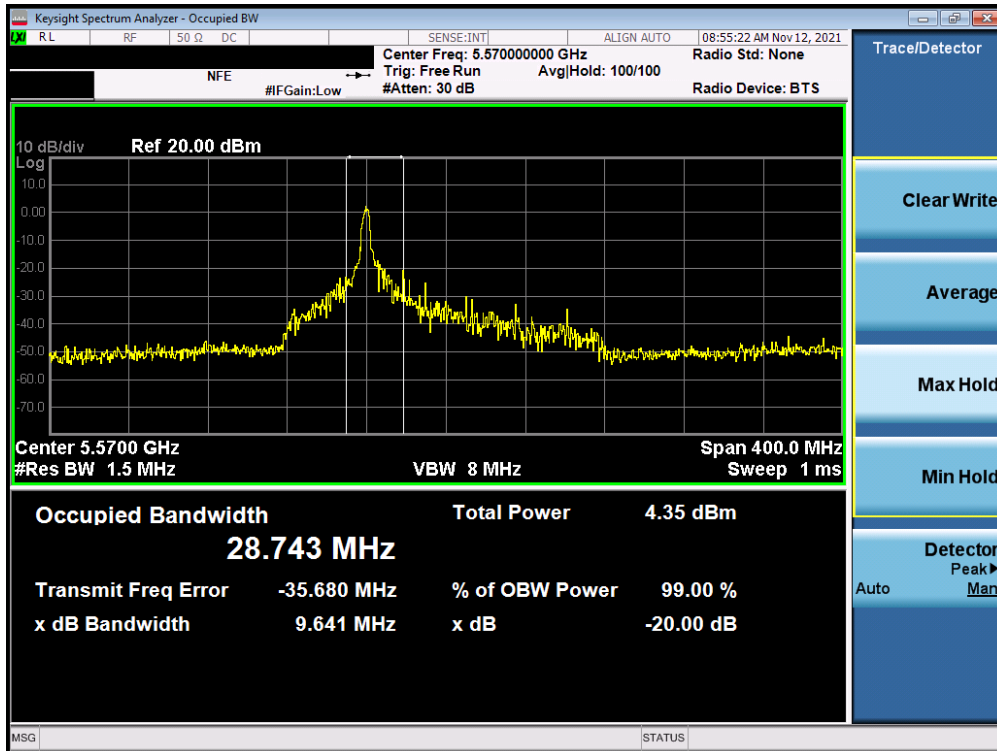

Plot 7-24. 26dB Bandwidth Plot MIMO ANT1 (160MHz BW (L) 802.11ax – 26 Tones (UNII Band 2C) – Ch. 114)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 27 of 237

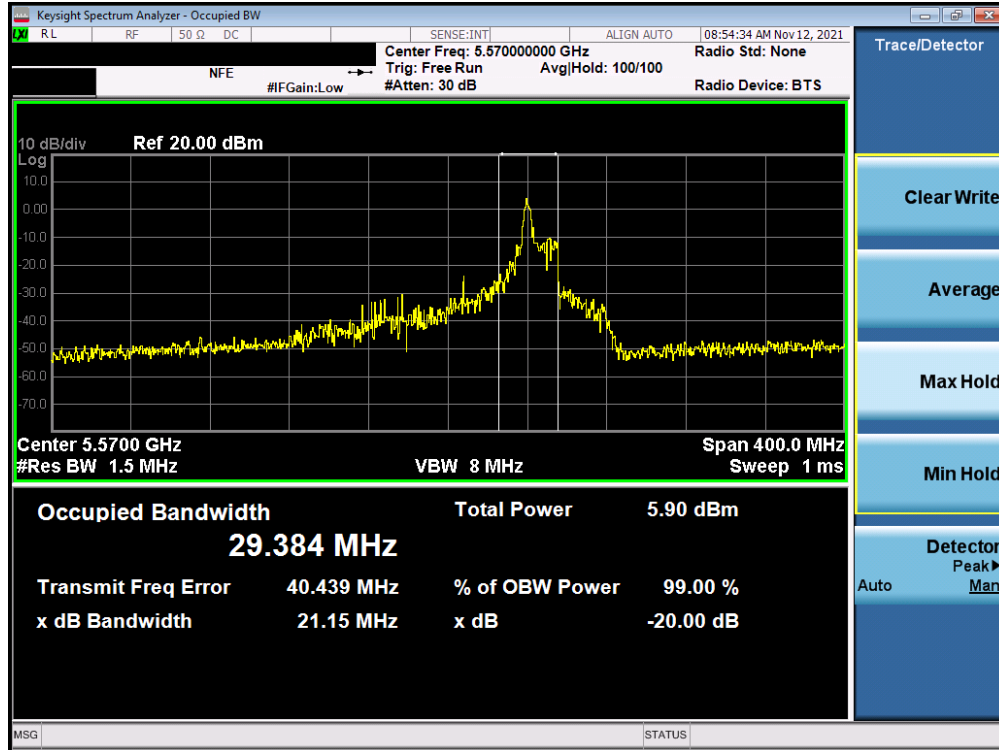

Plot 7-25. 26dB Bandwidth Plot MIMO ANT1 (160MHz BW (U) 802.11ax – 26 Tones (UNII Band 2C) – Ch. 114)


FCC ID: A3LSMS906E		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 28 of 237

MIMO Antenna-1 26 dB Bandwidth Measurements (Full Tones)


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	ax (20MHz)	242T	MCS0	21.93
	5200	40	ax (20MHz)	242T	MCS0	21.95
	5240	48	ax (20MHz)	242T	MCS0	22.01
	5190	38	ax (40MHz)	484T	MCS0	40.81
	5230	46	ax (40MHz)	484T	MCS0	40.78
	5210	42	ax (80MHz)	996T	MCS0	86.54
Band 1/2A	5250	50	ax (160MHz L)	996T	MCS0	93.84
	5250	50	ax (160MHz U)	996T	MCS0	118.90
Band 2A	5260	52	ax (20MHz)	242T	MCS0	21.76
	5280	56	ax (20MHz)	242T	MCS0	21.91
	5320	64	ax (20MHz)	242T	MCS0	21.69
	5270	54	ax (40MHz)	484T	MCS0	40.23
	5310	62	ax (40MHz)	484T	MCS0	40.29
	5290	58	ax (80MHz)	996T	MCS0	81.88
Band 2C	5500	100	ax (20MHz)	242T	MCS0	21.57
	5600	120	ax (20MHz)	242T	MCS0	21.65
	5720	144	ax (20MHz)	242T	MCS0	21.50
	5510	102	ax (40MHz)	484T	MCS0	40.30
	5590	118	ax (40MHz)	484T	MCS0	40.17
	5710	142	ax (40MHz)	484T	MCS0	40.17
	5530	106	ax (80MHz)	996T	MCS0	81.46
	5610	122	ax (80MHz)	996T	MCS0	81.81
	5690	138	ax (80MHz)	996T	MCS0	81.35
	5570	114	ax (160MHz L)	996T	MCS0	104.20
	5570	114	ax (160MHz U)	996T	MCS0	85.30

Table 7-3. Conducted Bandwidth Measurements MIMO ANT1 (Full Tones)

FCC ID: A3LSMS906E	 PCTEST® Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 29 of 237

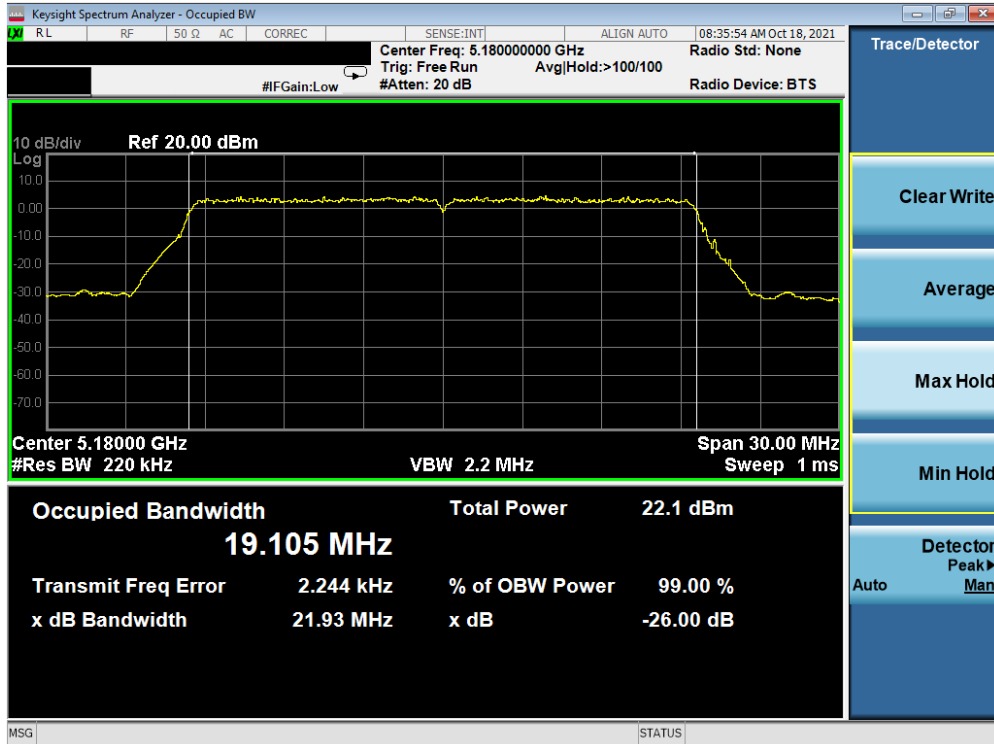


Plot 7-26. 26dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 1) – Ch. 36)

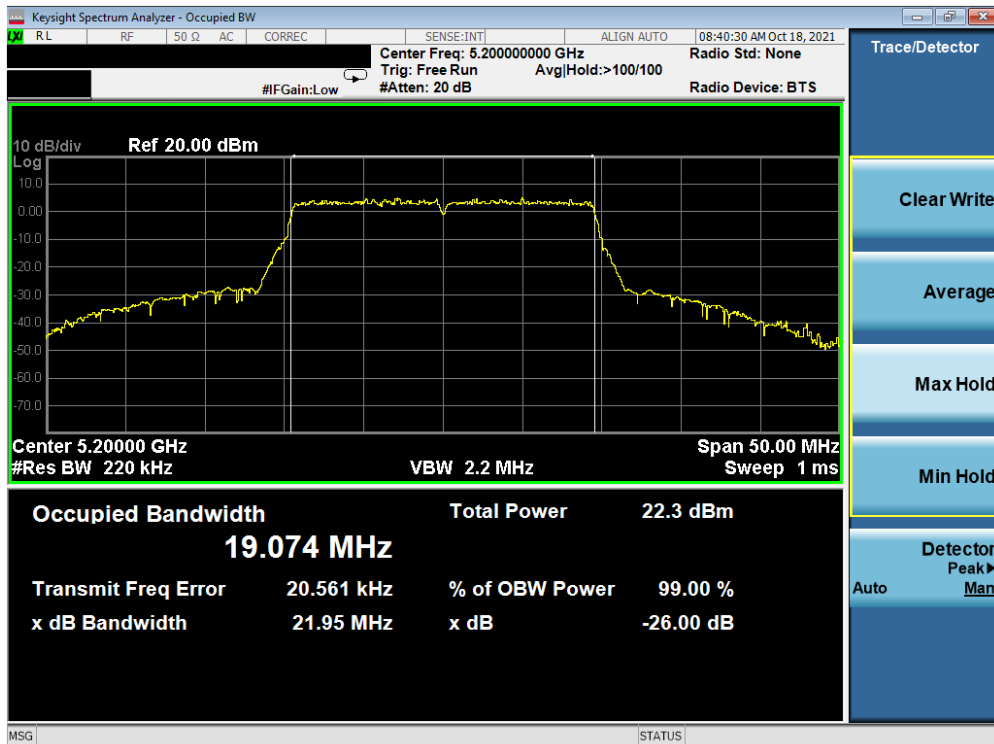


Plot 7-27. 26dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 1) – Ch. 40)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 30 of 237

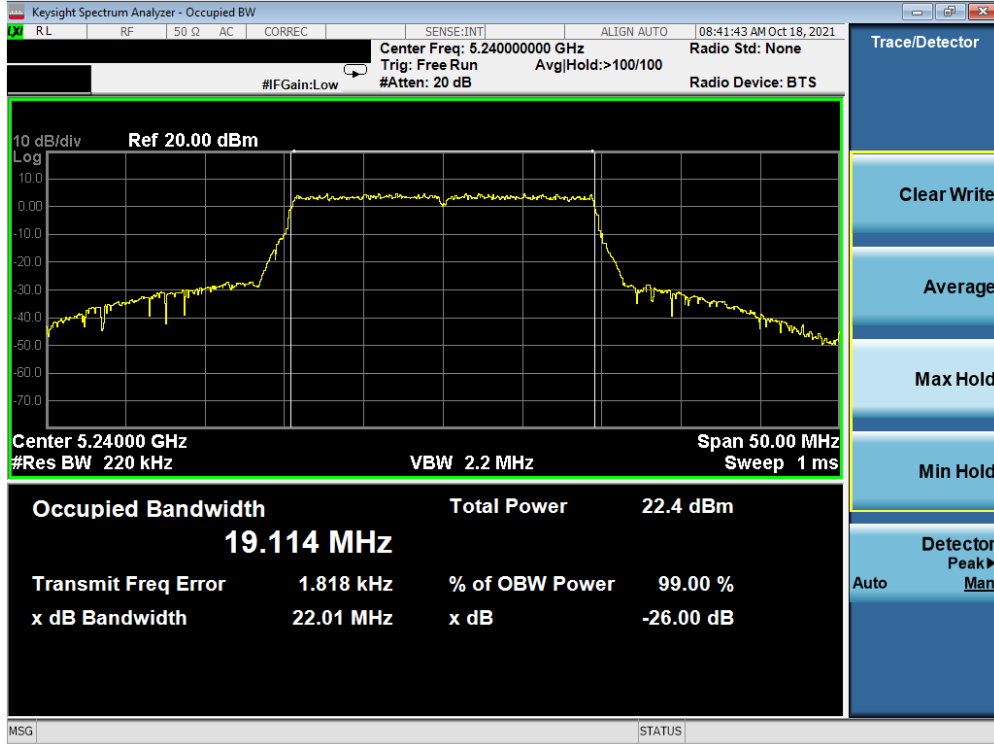


Plot 7-28. 26dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 1) – Ch. 48)

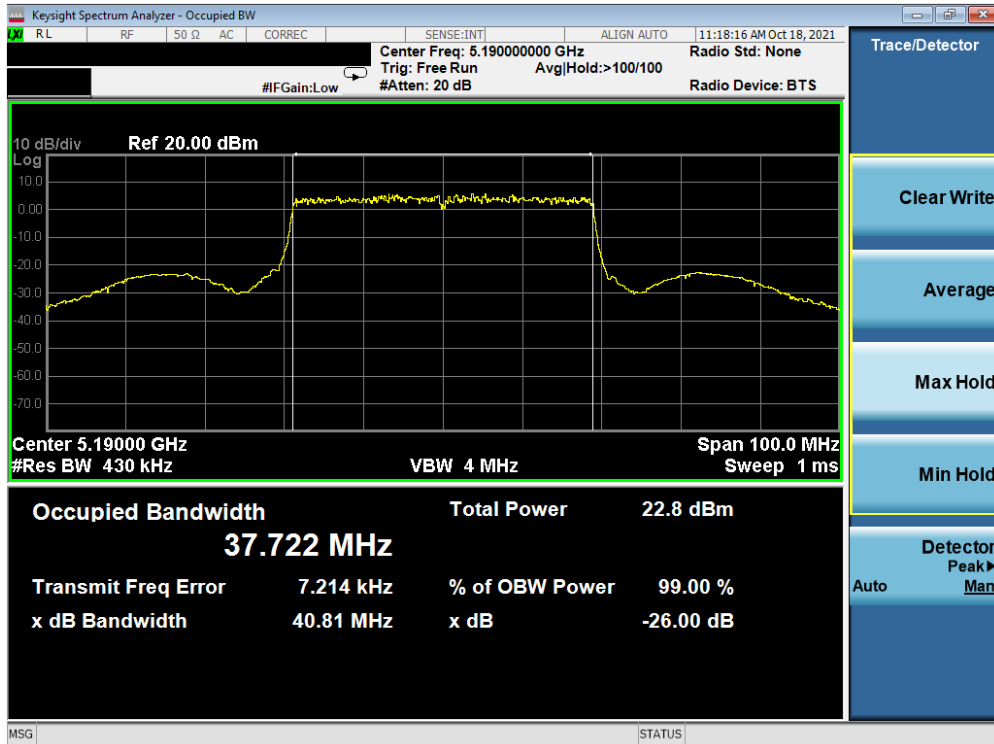


Plot 7-29. 26dB Bandwidth Plot MIMO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 1) – Ch. 38)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 31 of 237

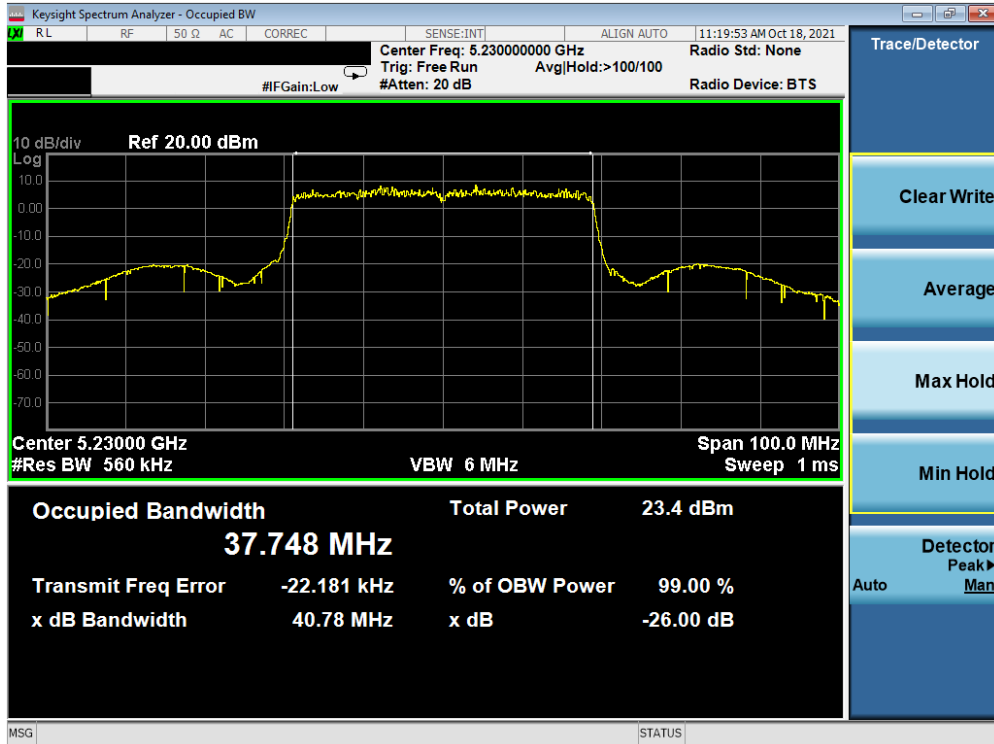


Plot 7-30. 26dB Bandwidth Plot MIMO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 1) – Ch. 46)

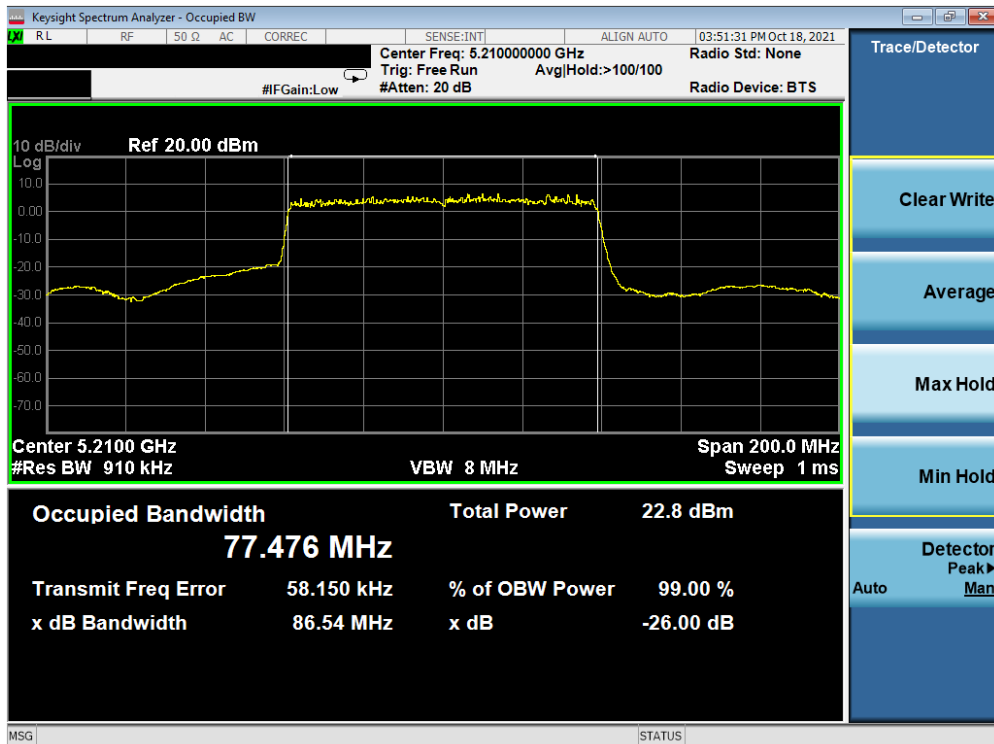


Plot 7-31. 26dB Bandwidth Plot MIMO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 1) – Ch. 42)

FCC ID: A3LSMS906E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 32 of 237

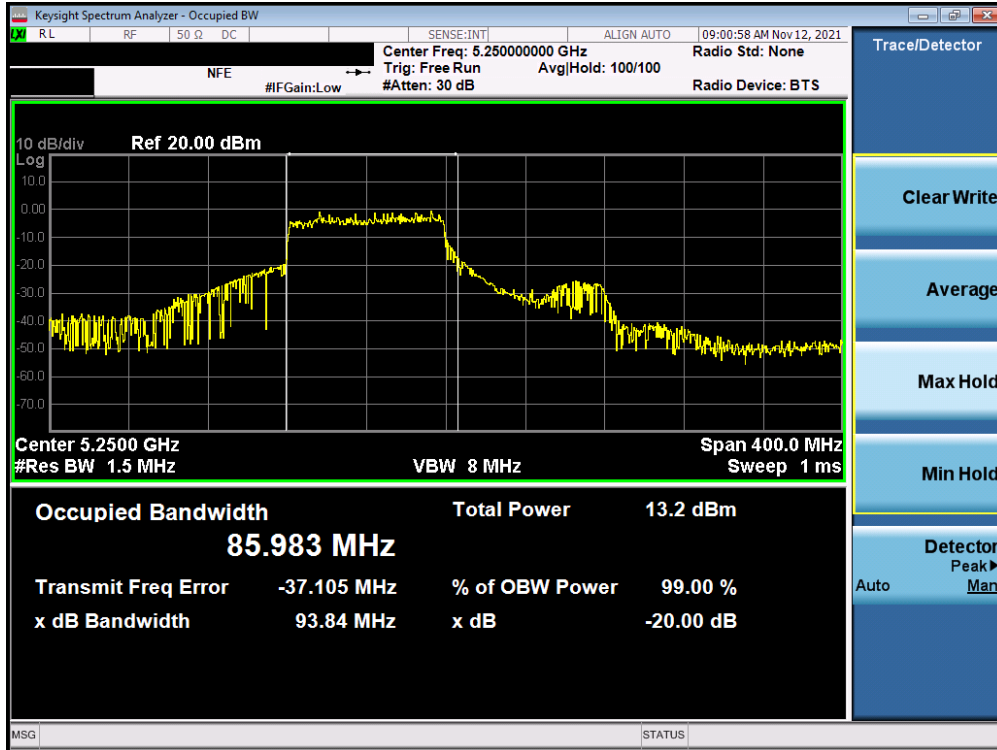


Plot 7-32. 26dB Bandwidth Plot MIMO ANT1 (160MHz BW (L) 802.11ax – 996 Tones (UNII Band 1/2A) – Ch. 50)

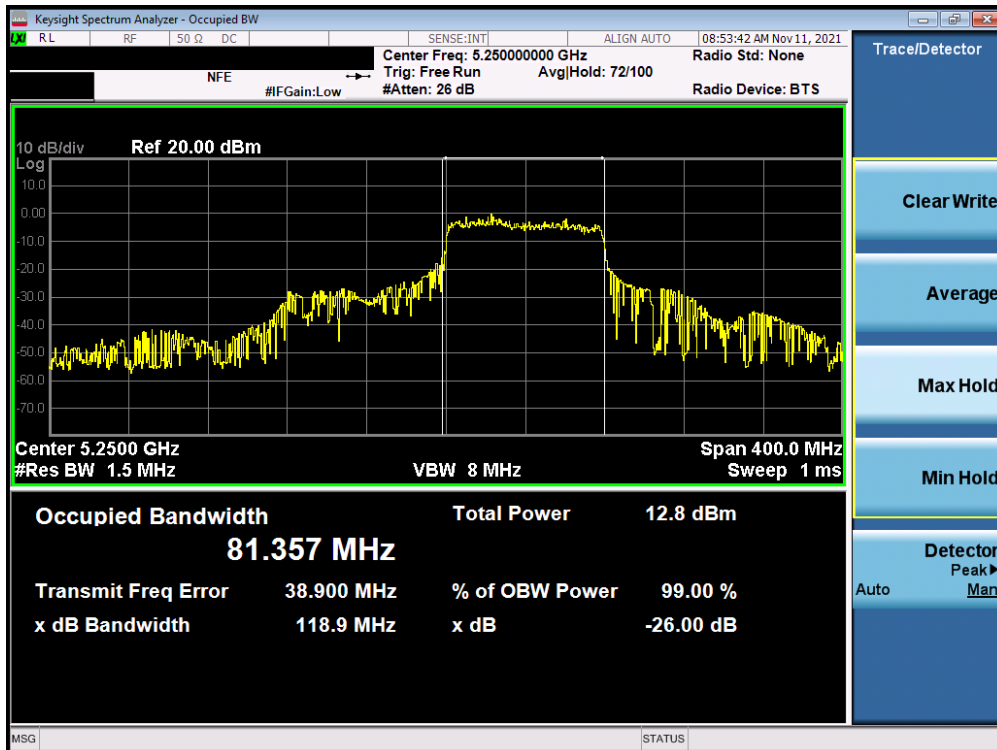


Plot 7-33. 26dB Bandwidth Plot MIMO ANT1 (160MHz BW (U) 802.11ax – 996 Tones (UNII Band 1/2A) – Ch. 50)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 33 of 237

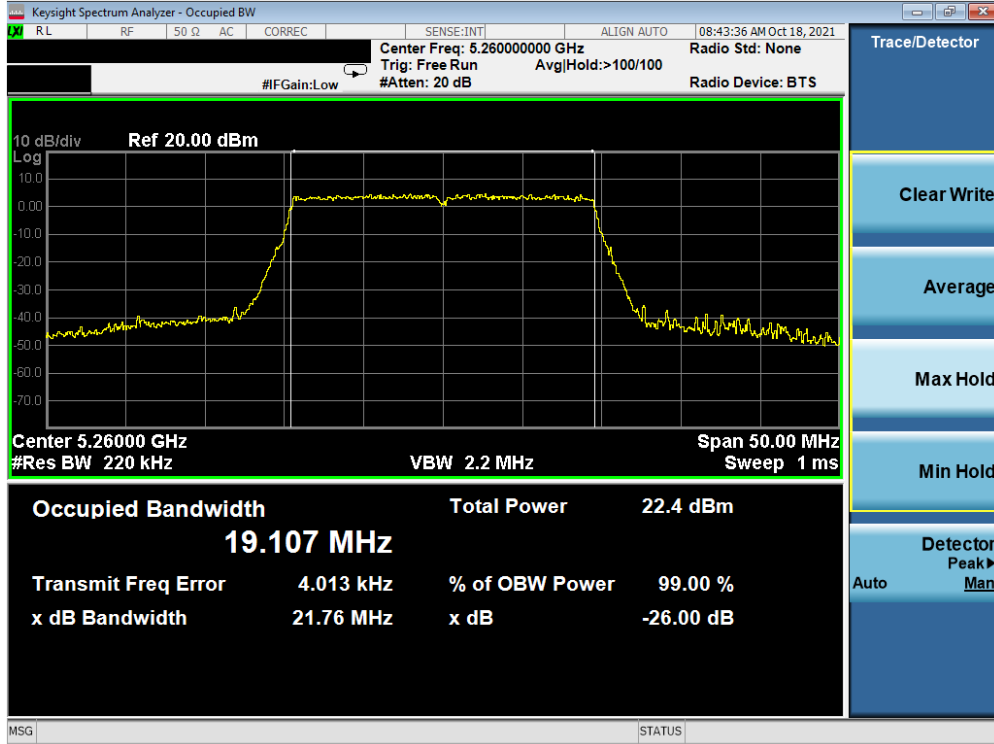


Plot 7-34. 26dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 2A) – Ch. 52)

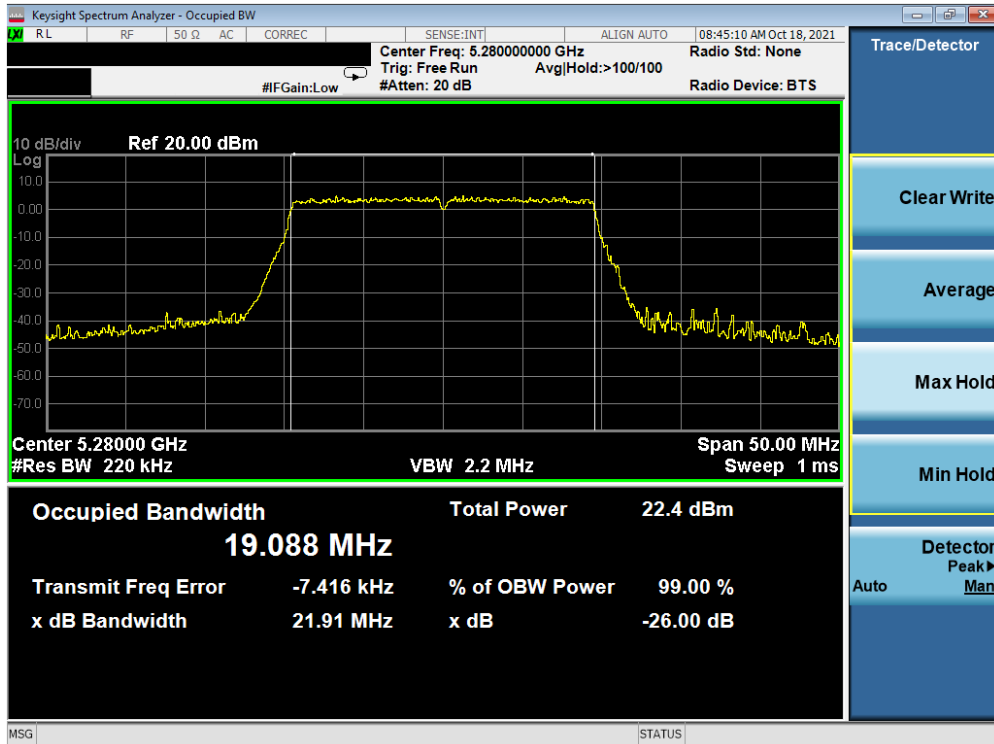


Plot 7-35. 26dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 34 of 237

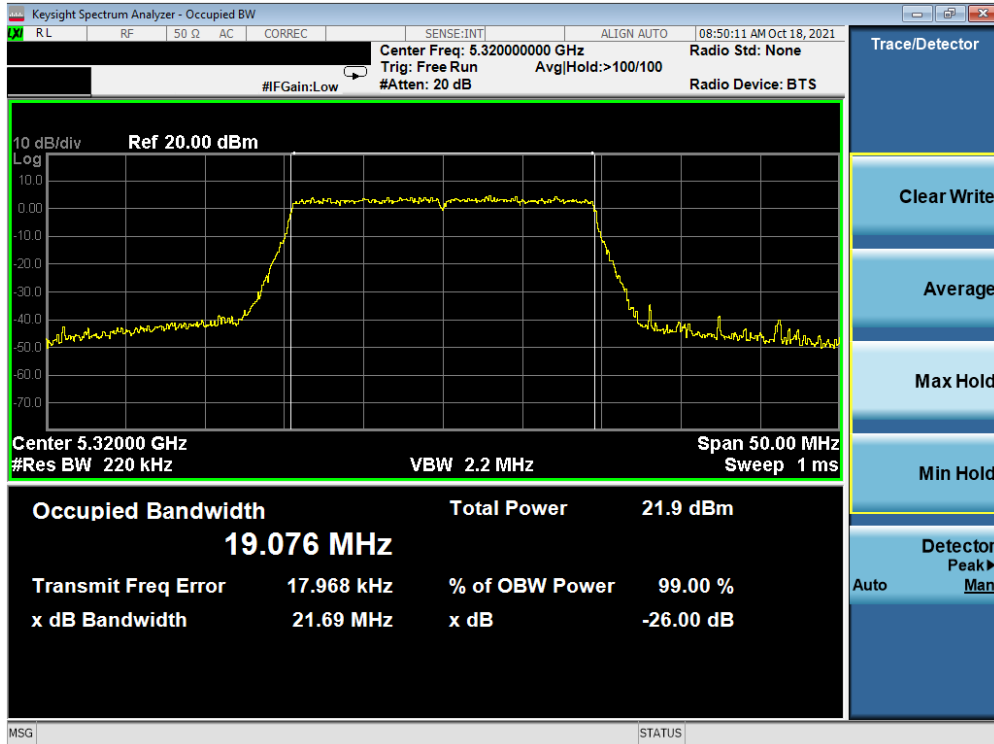


Plot 7-36. 26dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 2A) – Ch. 64)

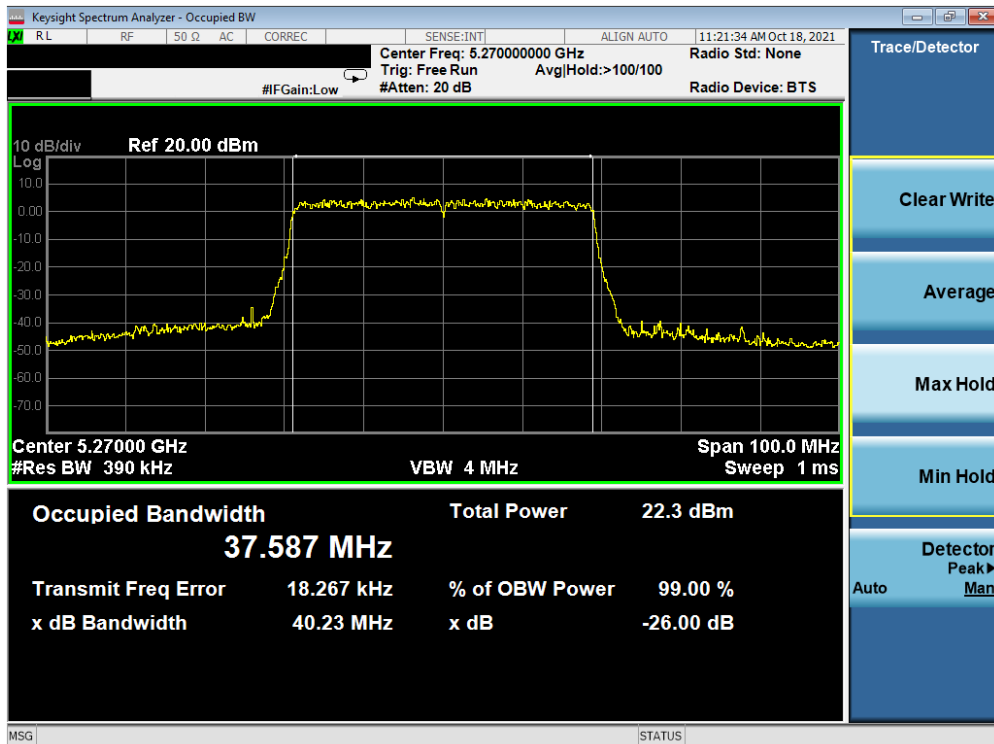


Plot 7-37. 26dB Bandwidth Plot MIMO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 35 of 237

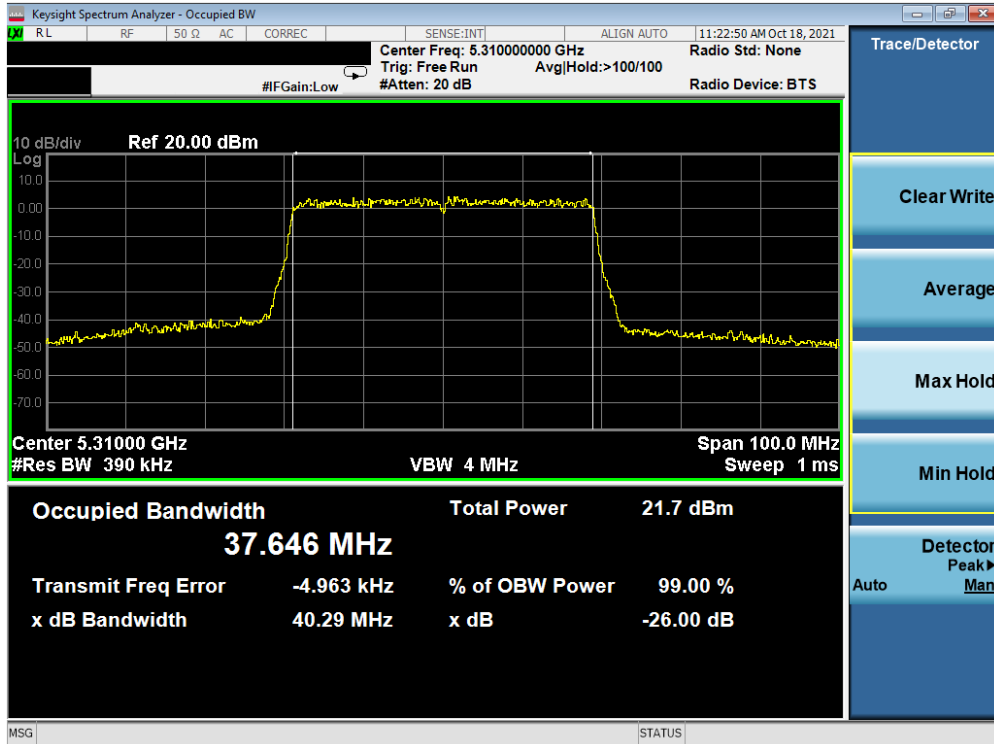


Plot 7-38. 26dB Bandwidth Plot MIMO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 2A) – Ch. 62)

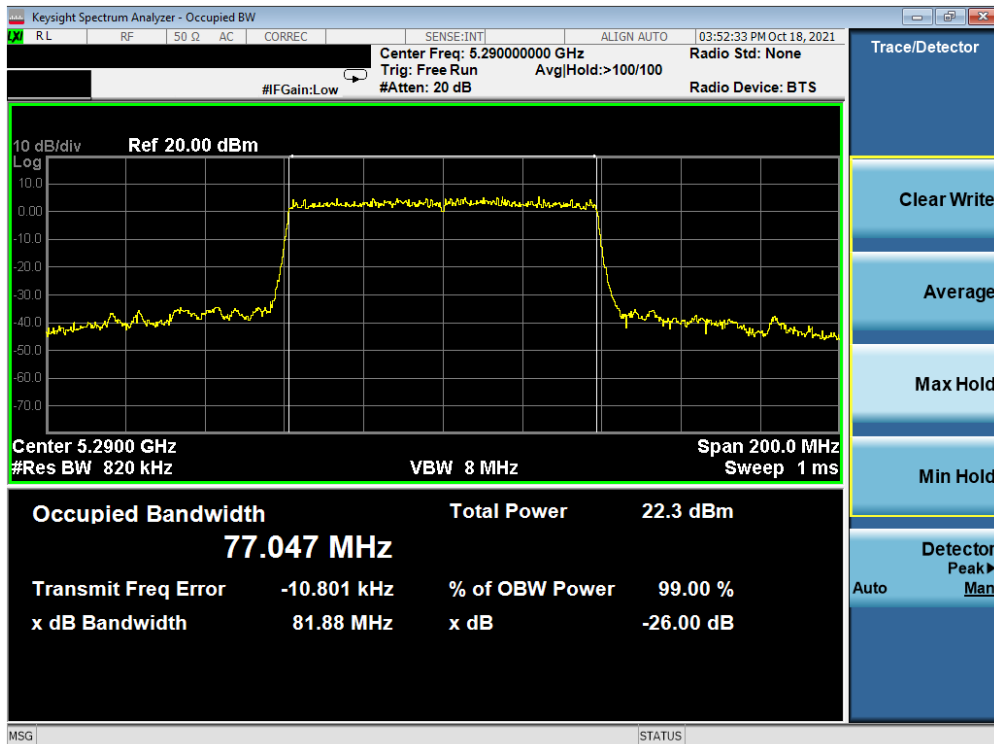


Plot 7-39. 26dB Bandwidth Plot MIMO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 36 of 237

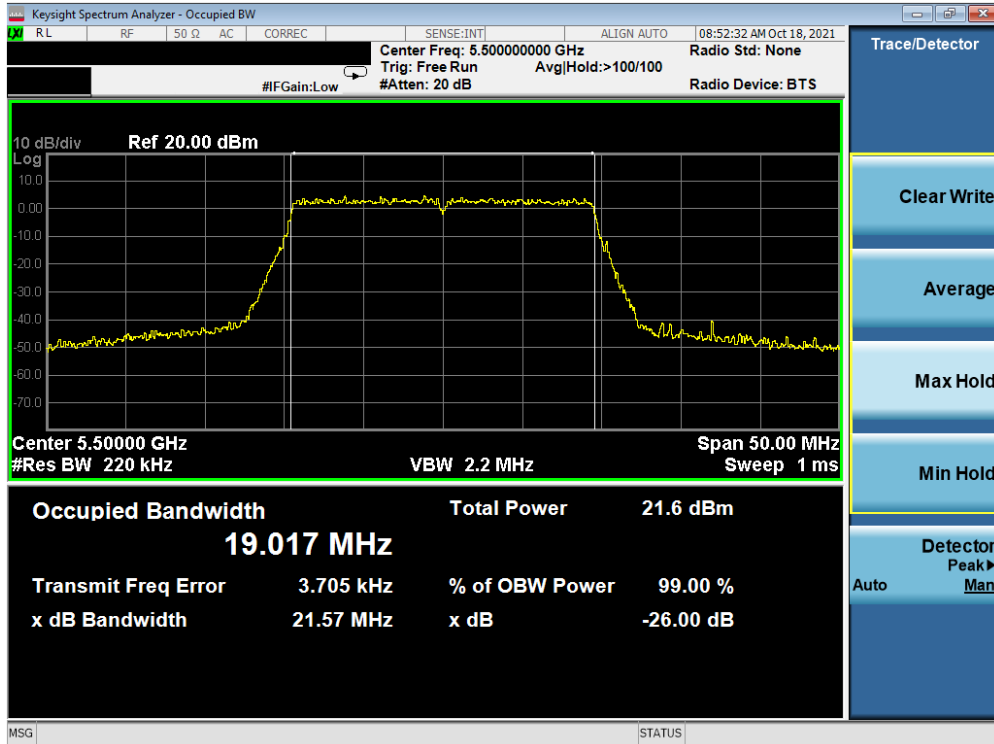


Plot 7-40. 26dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 2C) – Ch. 100)

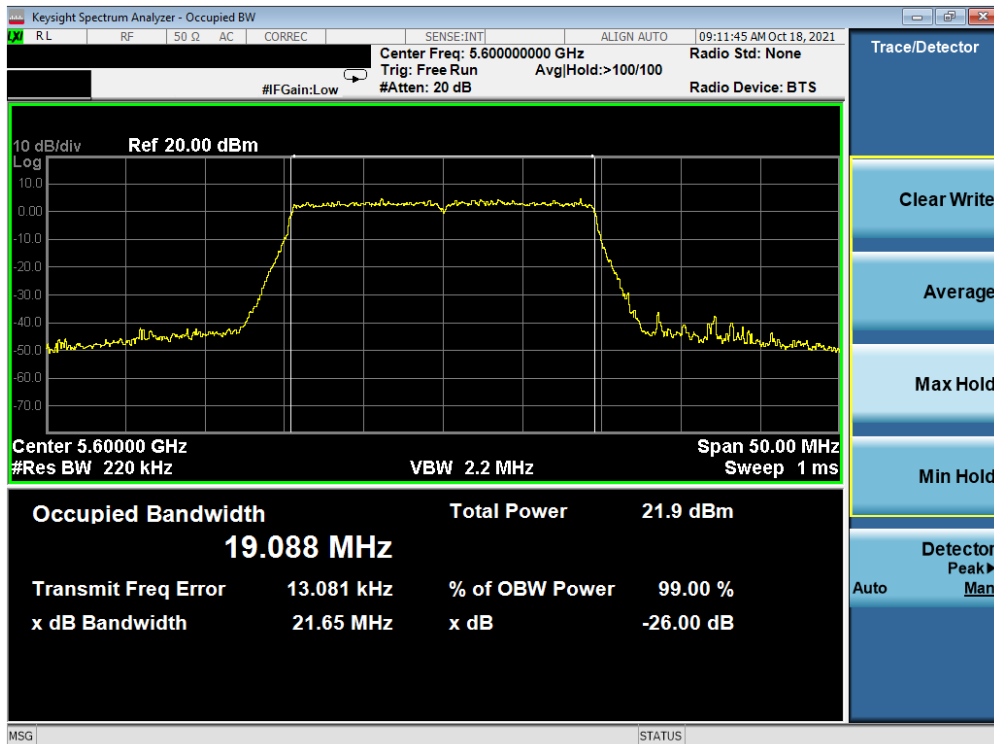


Plot 7-41. 26dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 37 of 237

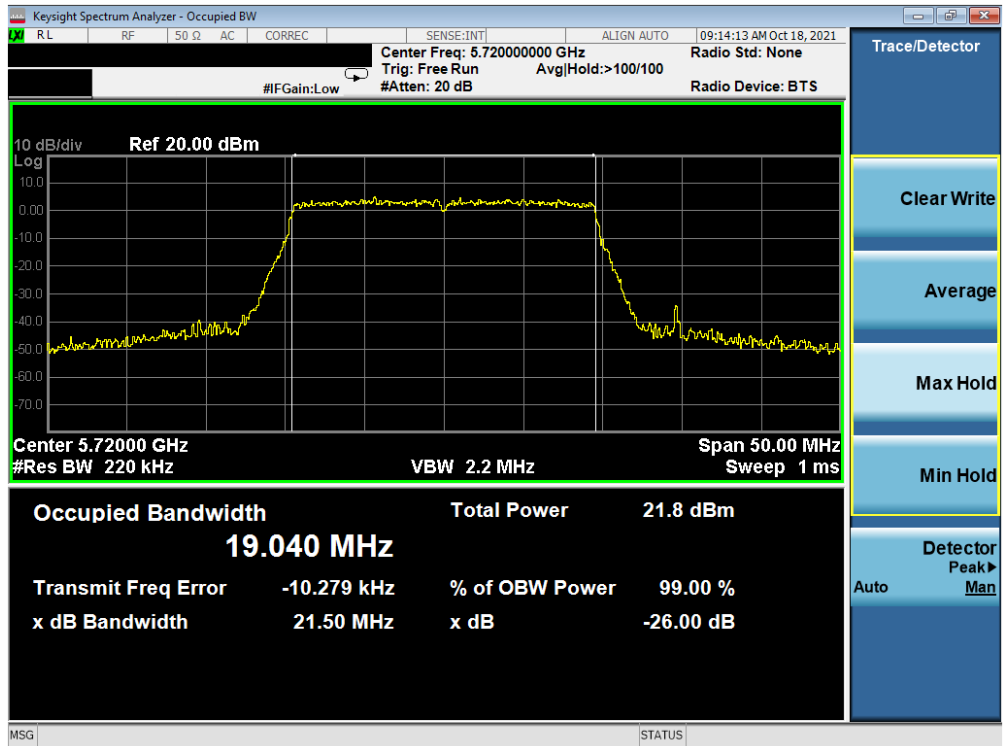


Plot 7-42. 26dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 2C) – Ch. 144)

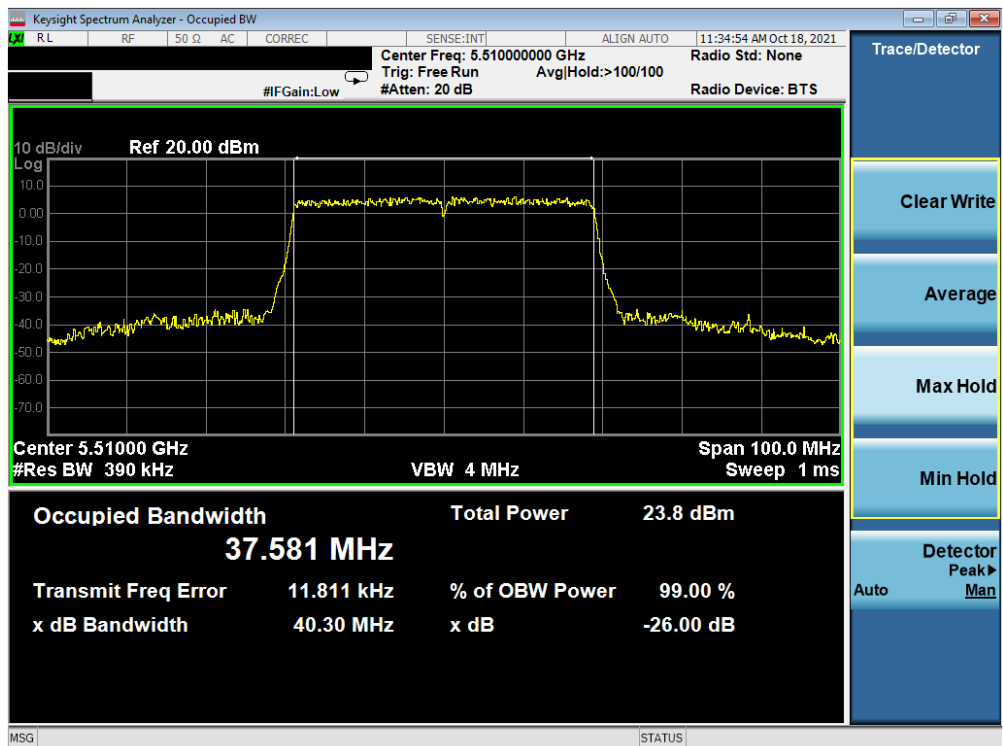


Plot 7-43. 26dB Bandwidth Plot MIMO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 2C) – Ch. 102)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 38 of 237

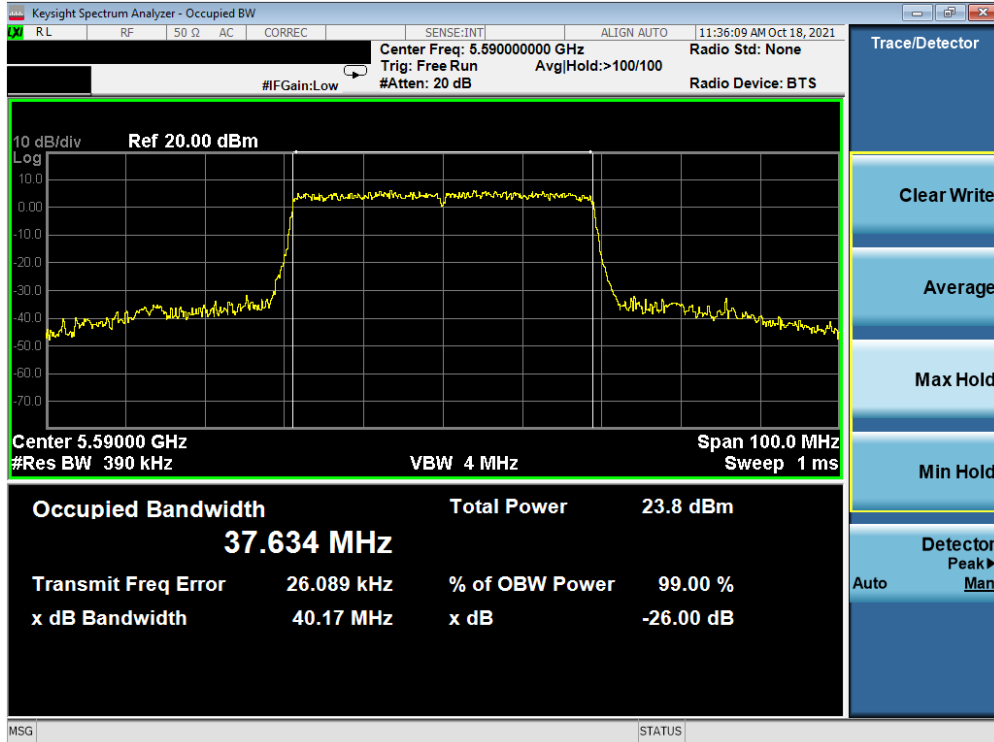


Plot 7-44. 26dB Bandwidth Plot MIMO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 2C) – Ch. 118)

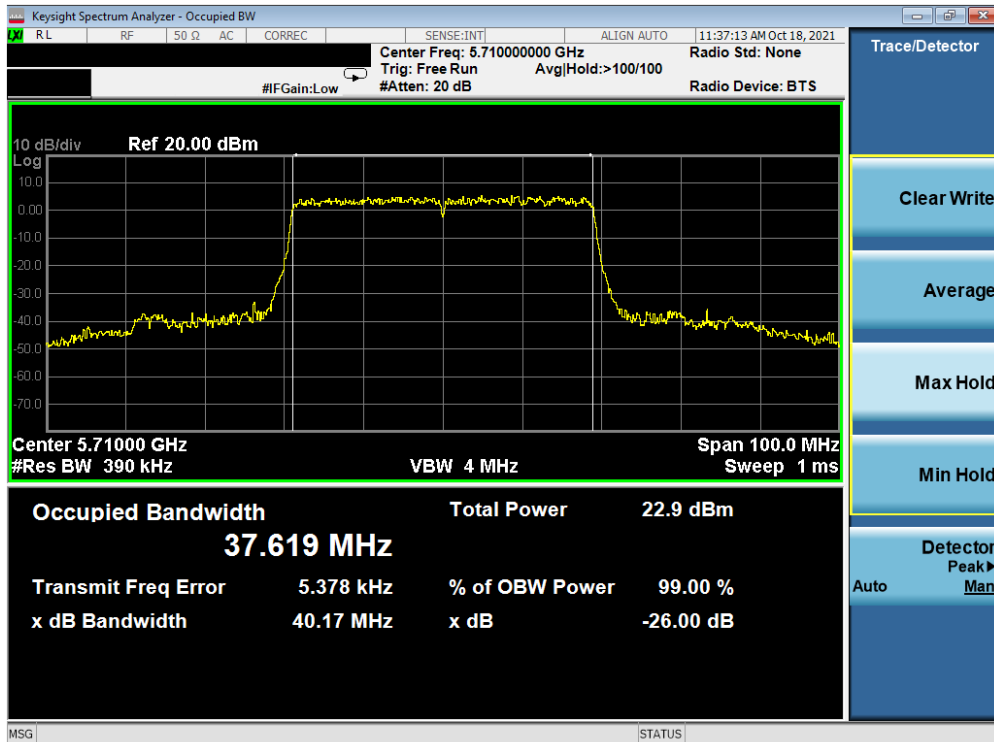


Plot 7-45. 26dB Bandwidth Plot MIMO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 2C) – Ch. 142)

FCC ID: A3LSMS906E		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 39 of 237

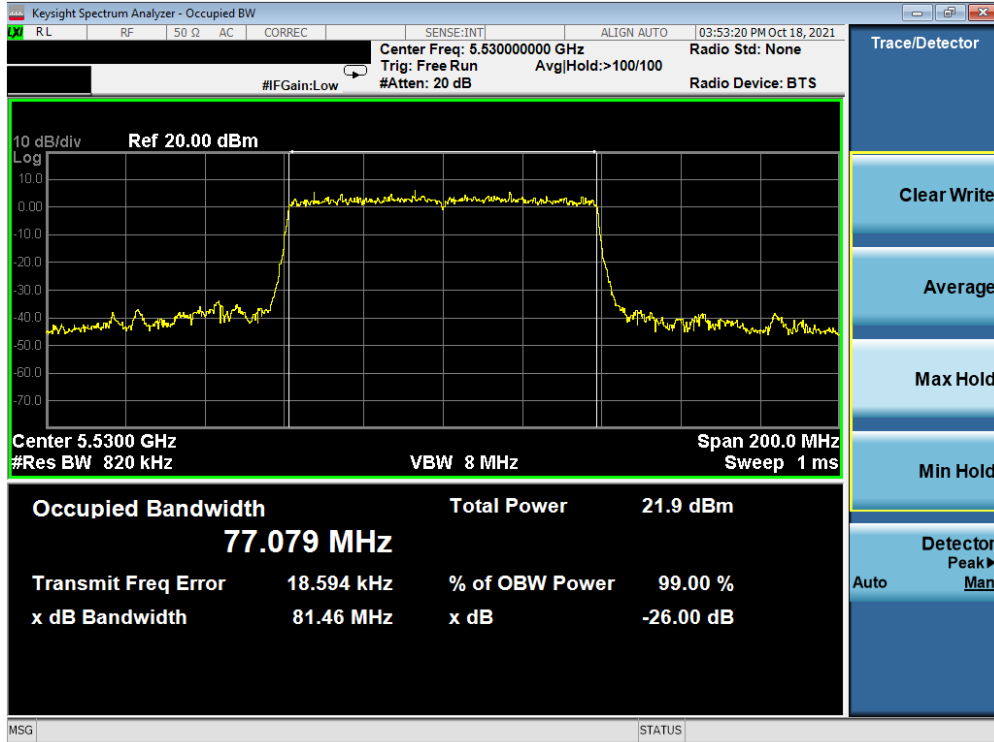


Plot 7-46. 26dB Bandwidth Plot MIMO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 2C) – Ch. 106)

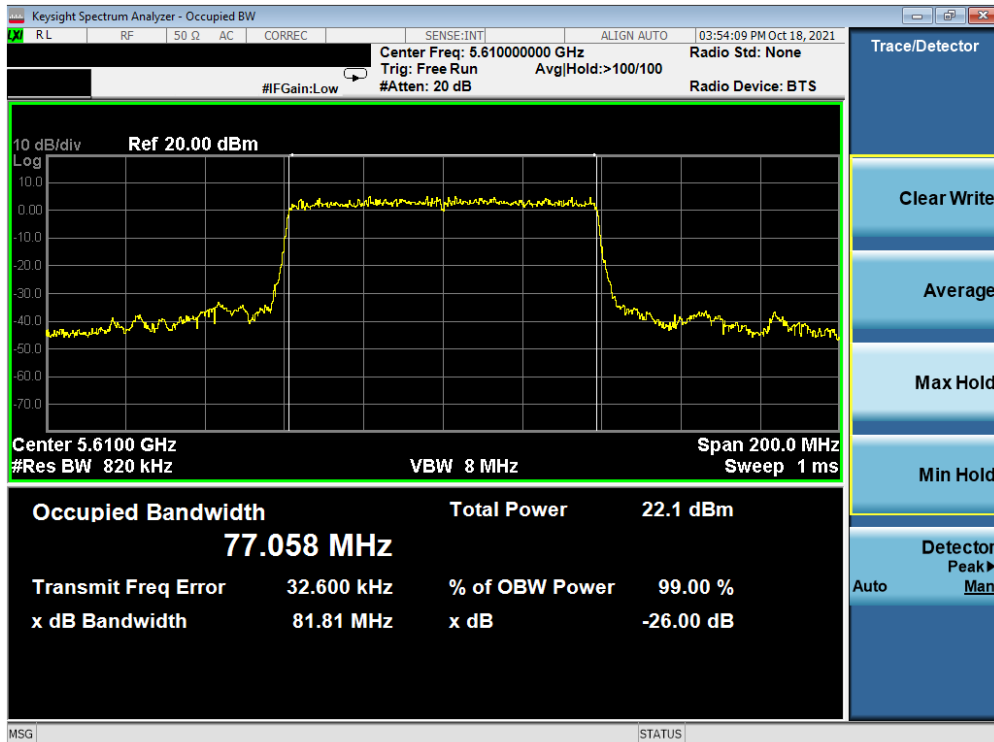


Plot 7-47. 26dB Bandwidth Plot MIMO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 40 of 237

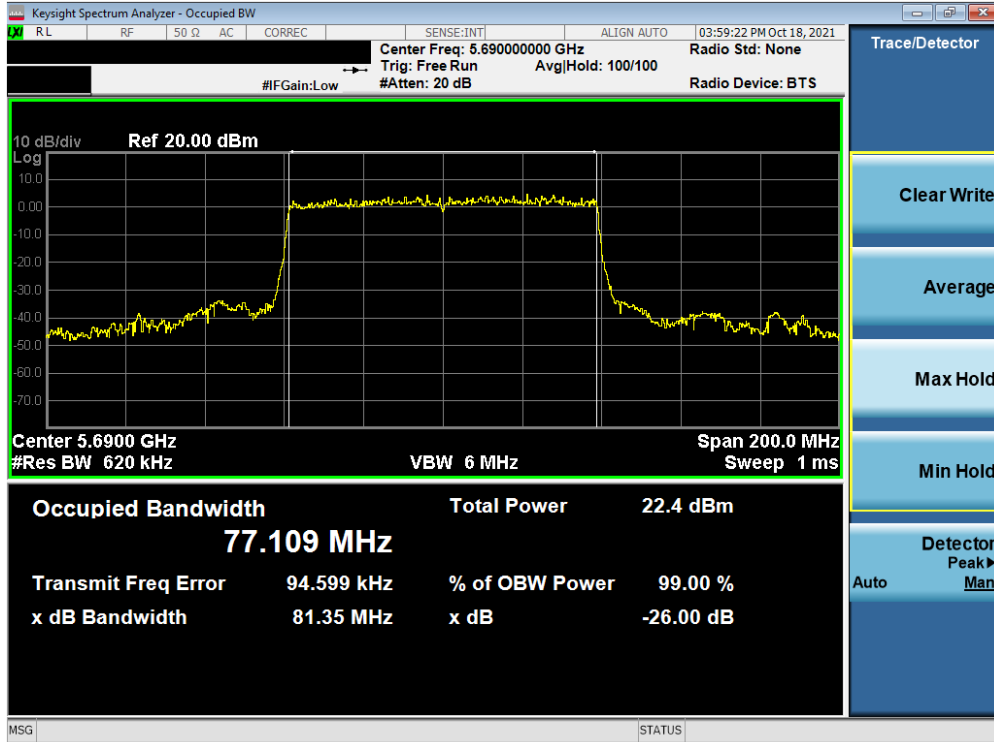


Plot 7-48. 26dB Bandwidth Plot MIMO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 2C) – Ch. 138)

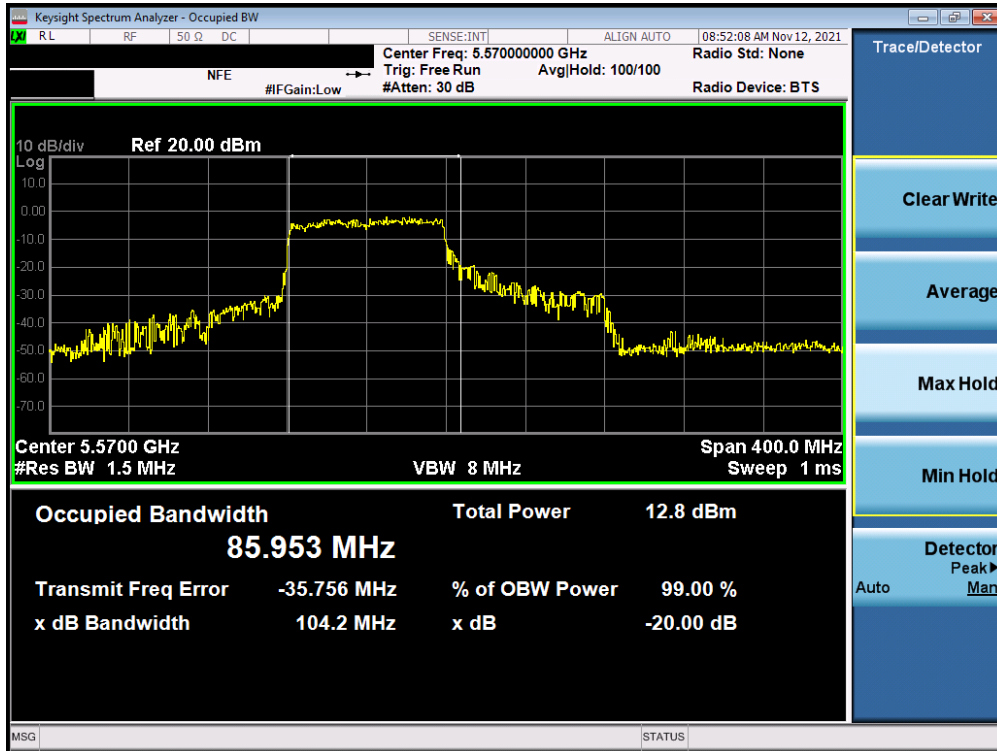

Plot 7-49. 26dB Bandwidth Plot MIMO ANT1 (160MHz BW (L) 802.11ax – 996 Tones (UNII Band 2C) – Ch. 114)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 41 of 237

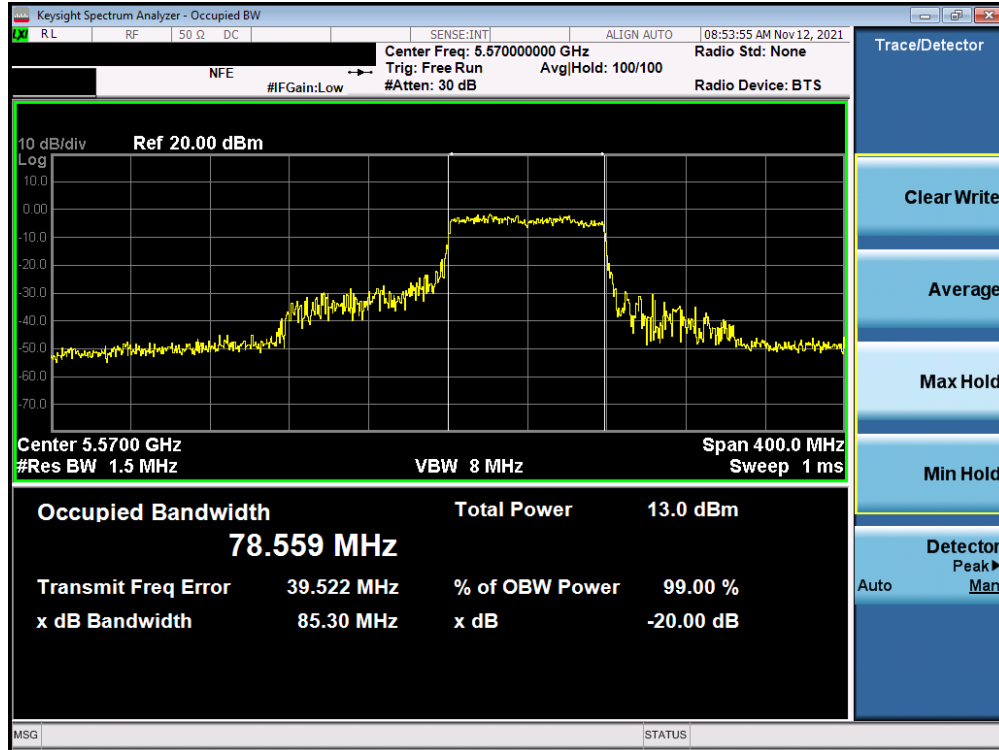

Plot 7-50. 26dB Bandwidth Plot MIMO ANT1 (160MHz BW (U) 802.11ax – 996 Tones (UNII Band 2C) – Ch. 114)


FCC ID: A3LSMS906E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 42 of 237

MIMO Antenna-2 26dB Bandwidth Measurements (26 Tones)


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	ax (20MHz)	26T	MCS0	18.08
	5200	40	ax (20MHz)	26T	MCS0	19.73
	5240	48	ax (20MHz)	26T	MCS0	19.72
	5190	38	ax (40MHz)	26T	MCS0	21.01
	5230	46	ax (40MHz)	26T	MCS0	18.94
	5210	42	ax (80MHz)	26T	MCS0	38.33
Band 1/2A	5250	50	ax (160MHz L)	26T	MCS0	27.62
	5250	50	ax (160MHz U)	26T	MCS0	30.78
Band 2A	5260	52	ax (20MHz)	26T	MCS0	19.62
	5280	56	ax (20MHz)	26T	MCS0	19.72
	5320	64	ax (20MHz)	26T	MCS0	19.66
	5270	54	ax (40MHz)	26T	MCS0	21.37
	5310	62	ax (40MHz)	26T	MCS0	21.22
	5290	58	ax (80MHz)	26T	MCS0	38.04
Band 2C	5500	100	ax (20MHz)	26T	MCS0	19.88
	5600	120	ax (20MHz)	26T	MCS0	19.69
	5720	144	ax (20MHz)	26T	MCS0	18.04
	5510	102	ax (40MHz)	26T	MCS0	18.91
	5590	118	ax (40MHz)	26T	MCS0	18.70
	5710	142	ax (40MHz)	26T	MCS0	18.70
	5530	106	ax (80MHz)	26T	MCS0	38.15
	5610	122	ax (80MHz)	26T	MCS0	38.23
	5690	138	ax (80MHz)	26T	MCS0	38.32
	5570	114	ax (160MHz L)	26T	MCS0	37.68
5570	114	ax (160MHz U)	26T	MCS0	36.96	

Table 7-4. Conducted Bandwidth Measurements MIMO ANT2 (26 Tones)

FCC ID: A3LSMS906E		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 43 of 237

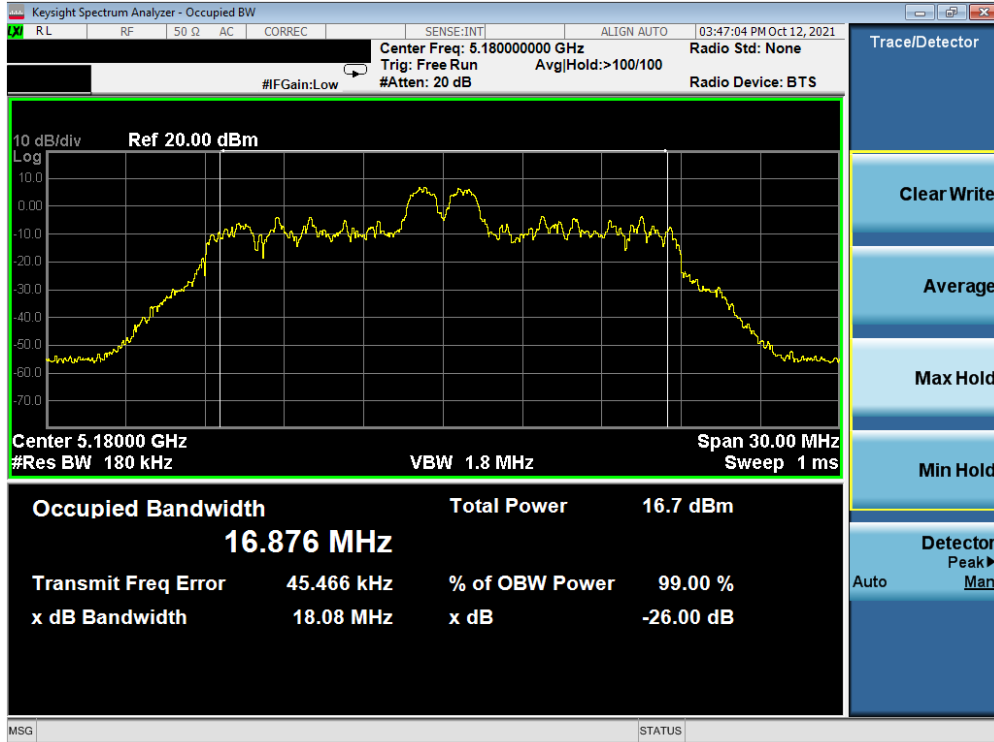


Plot 7-51. 26dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 36)

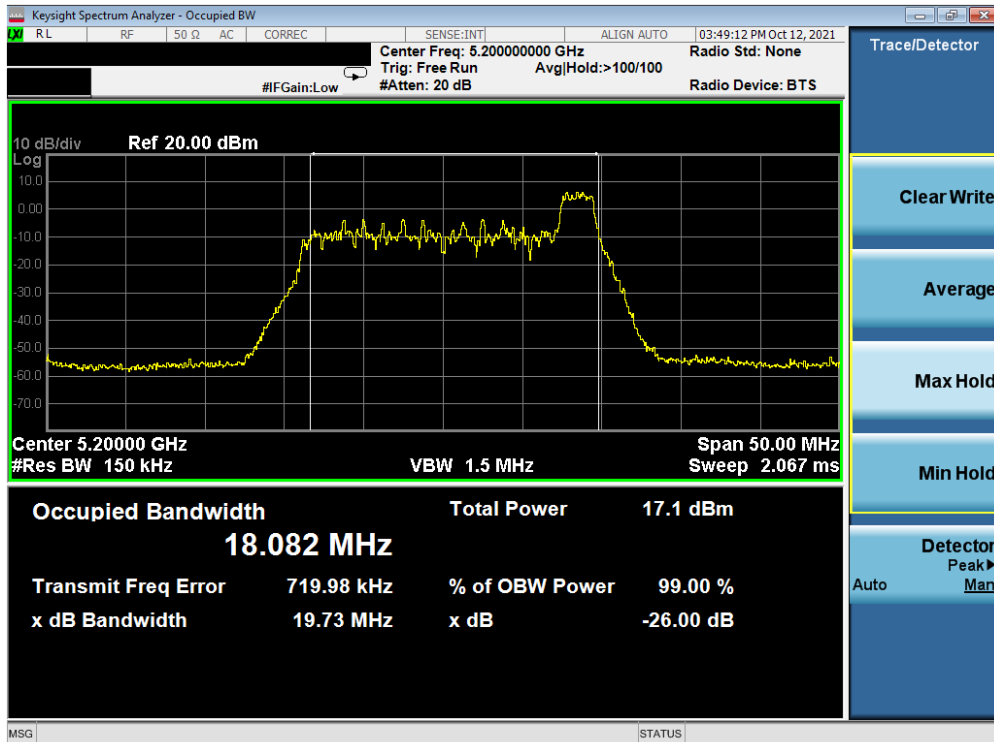


Plot 7-52. 26dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 40)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 44 of 237

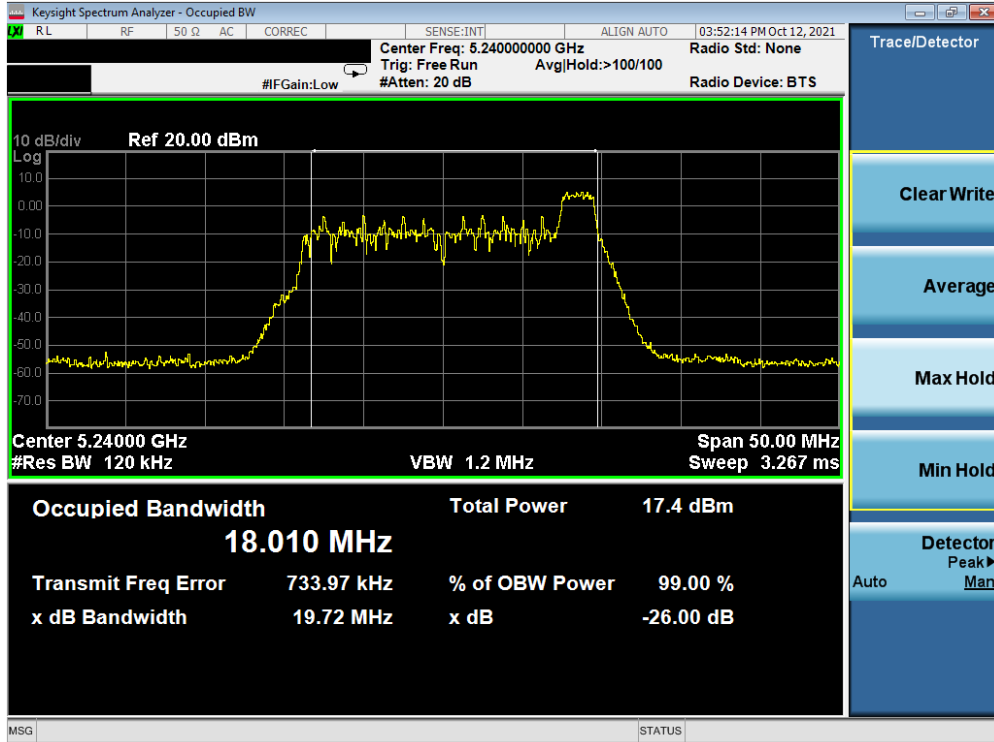


Plot 7-53. 26dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 48)

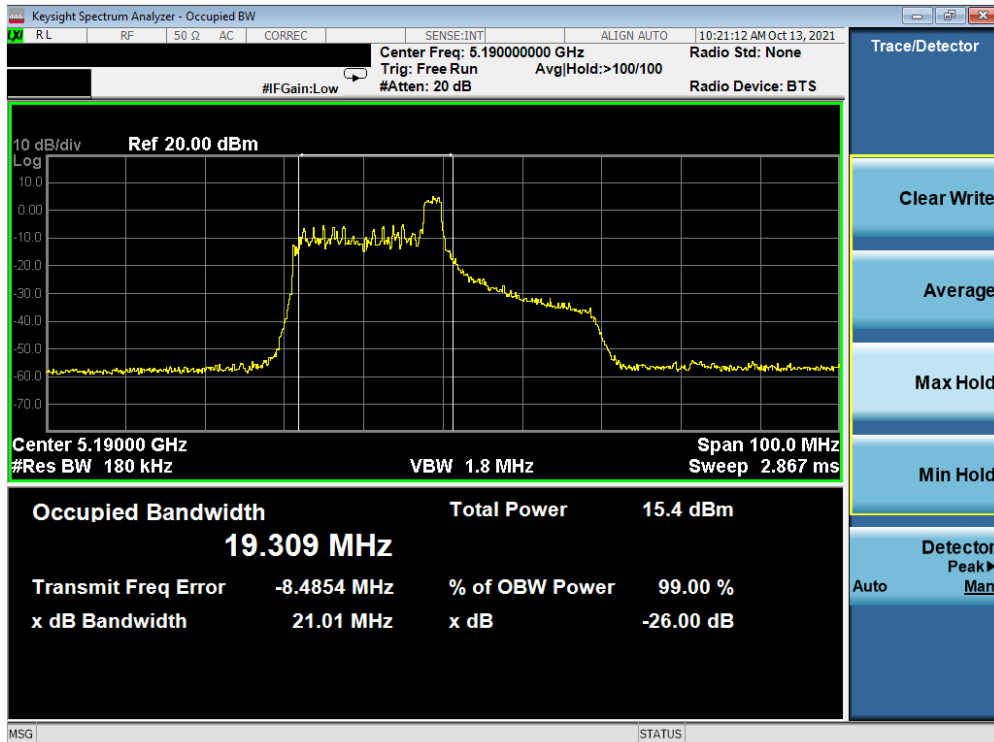


Plot 7-54. 26dB Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 38)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 45 of 237

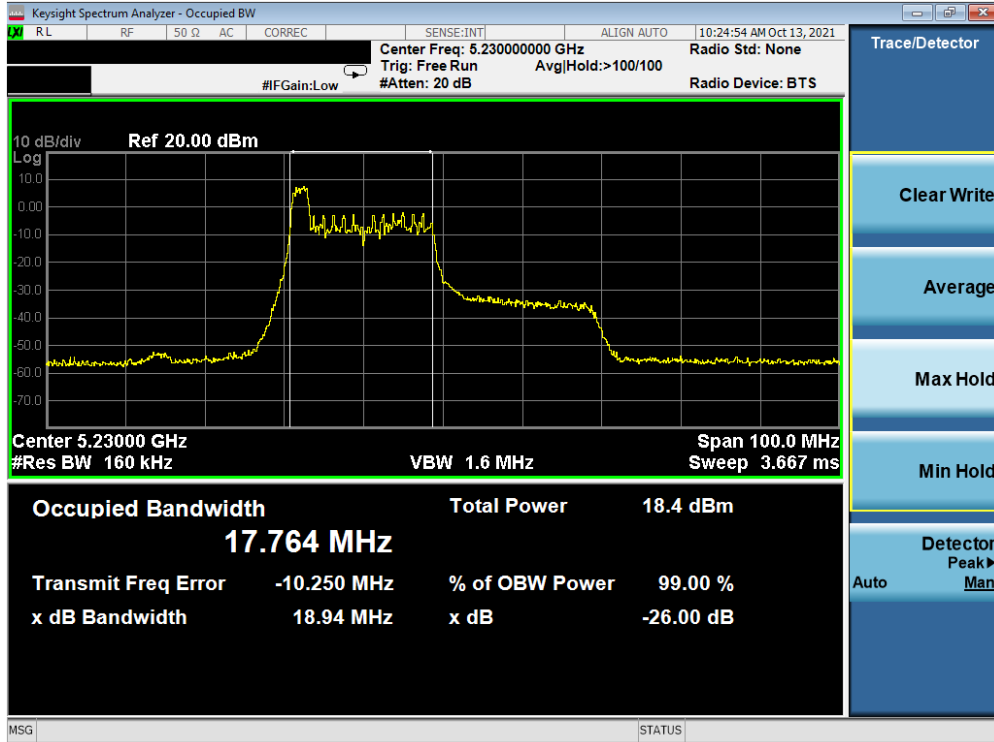


Plot 7-55. 26dB Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 46)

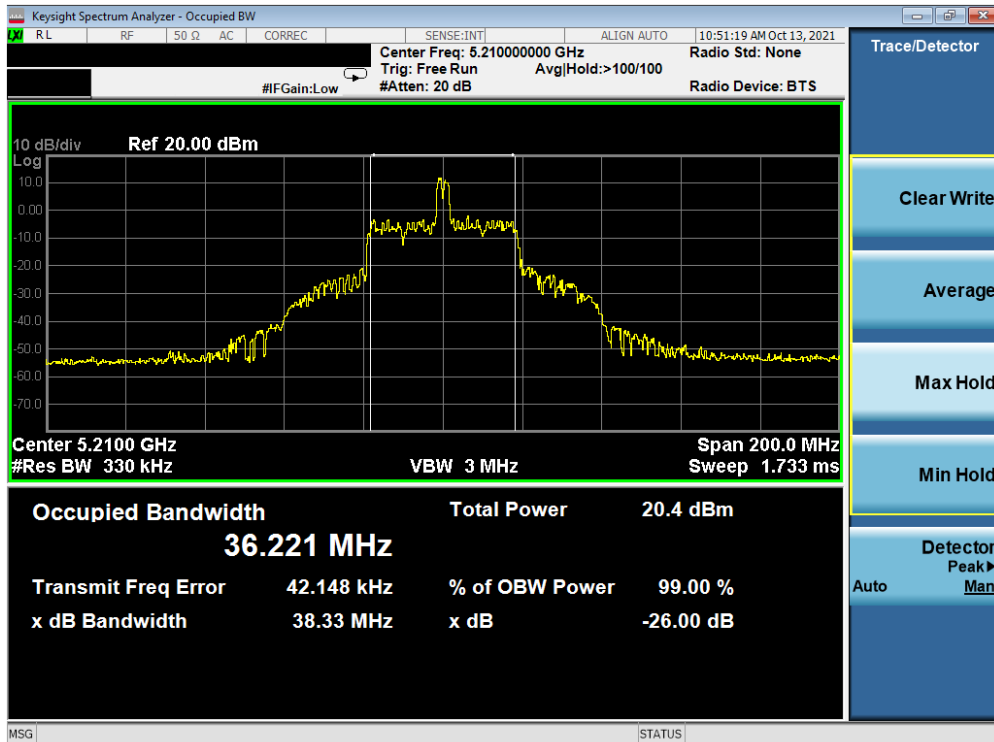


Plot 7-56. 26dB Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 42)

FCC ID: A3LSMS906E		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 46 of 237

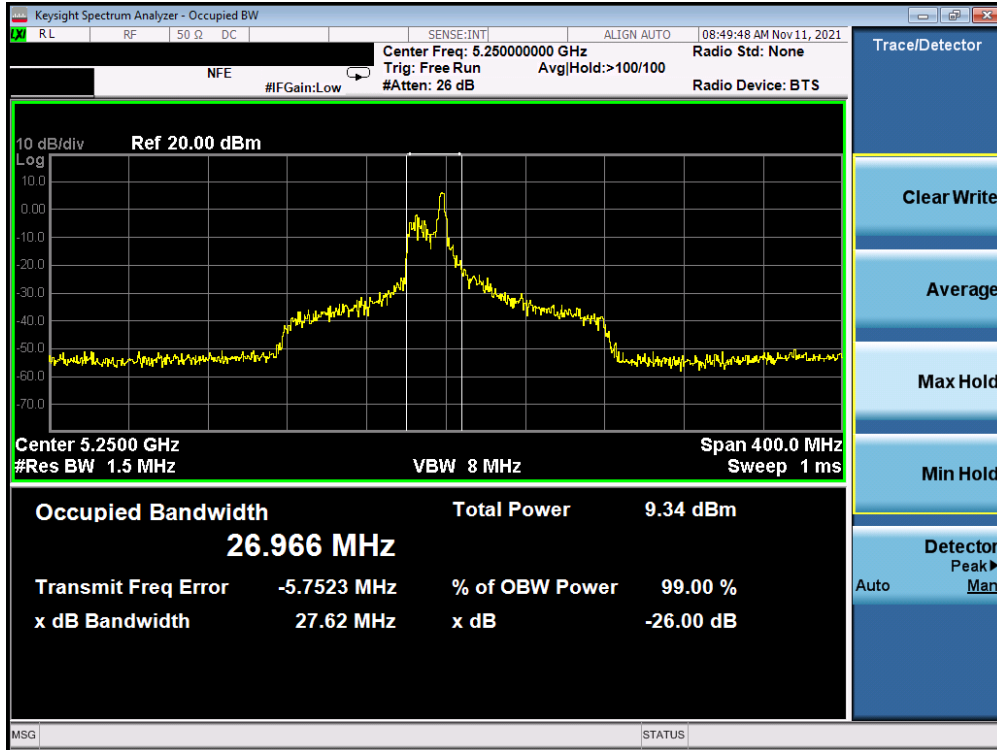


Plot 7-57. 26dB Bandwidth Plot MIMO ANT2 (160MHz BW (L) 802.11ax – 26 Tones (UNII Band 1/2A) – Ch. 50)

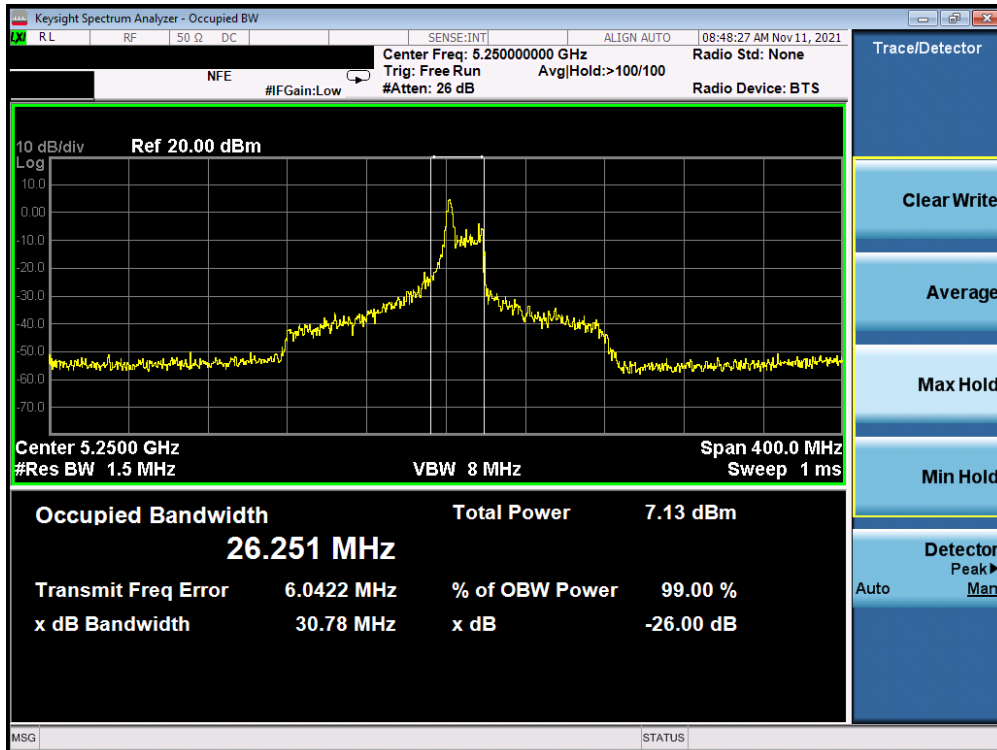


Plot 7-58. 26dB Bandwidth Plot MIMO ANT2 (160MHz BW (U) 802.11ax – 26 Tones (UNII Band 1/2A) – Ch. 50)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 47 of 237

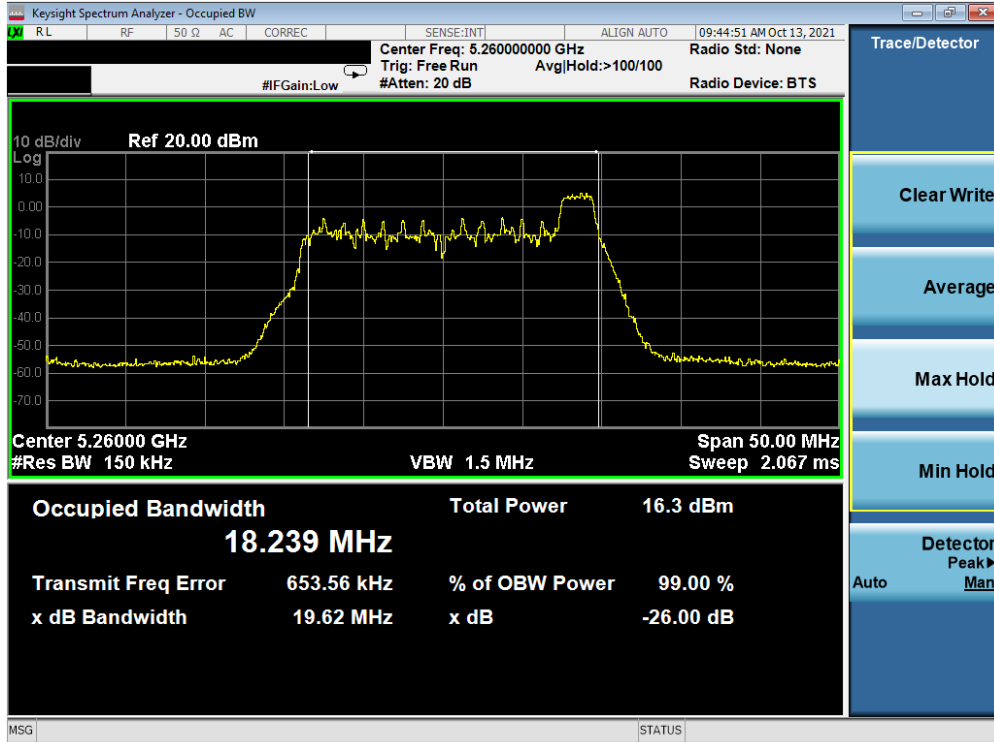


Plot 7-59. 26dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 52)

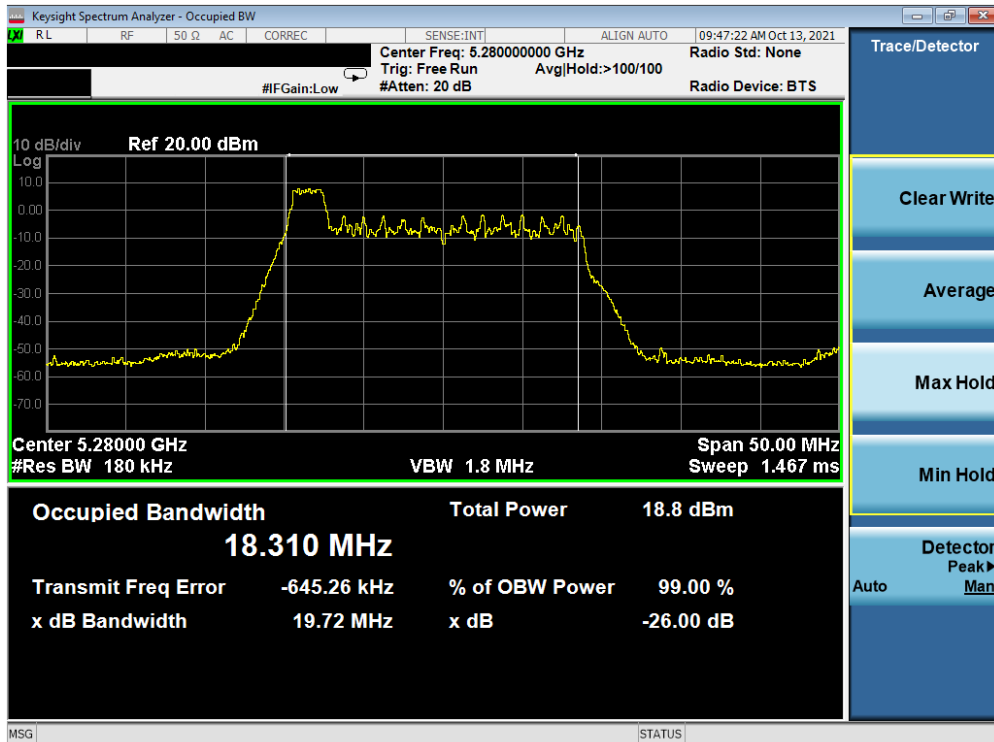


Plot 7-60. 26dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 48 of 237

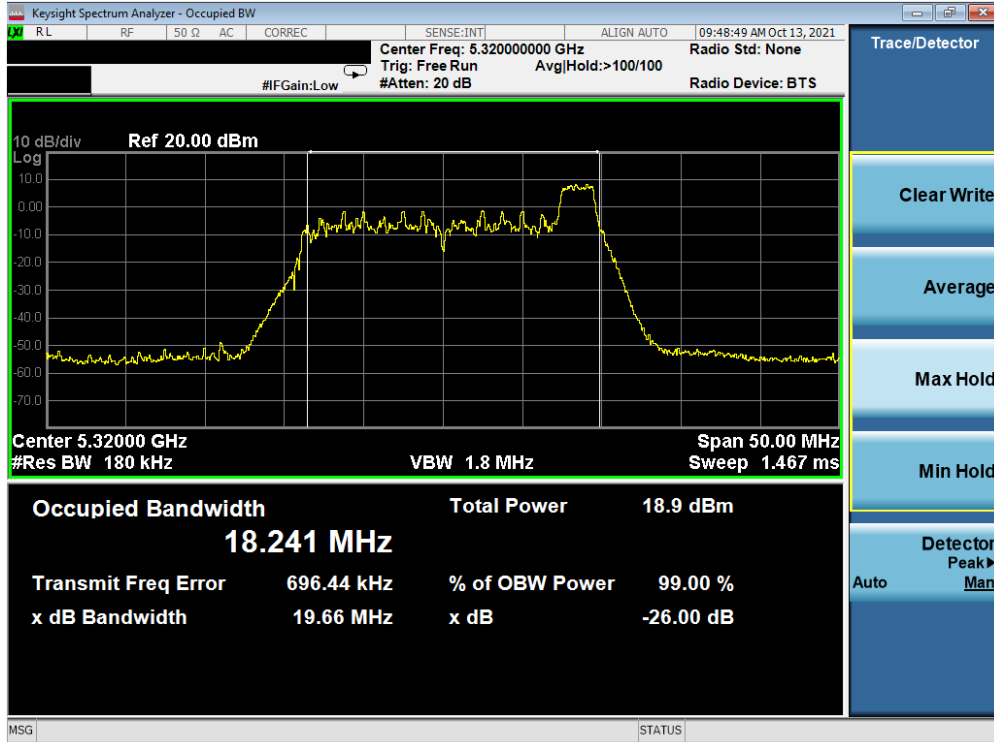


Plot 7-61. 26dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 64)

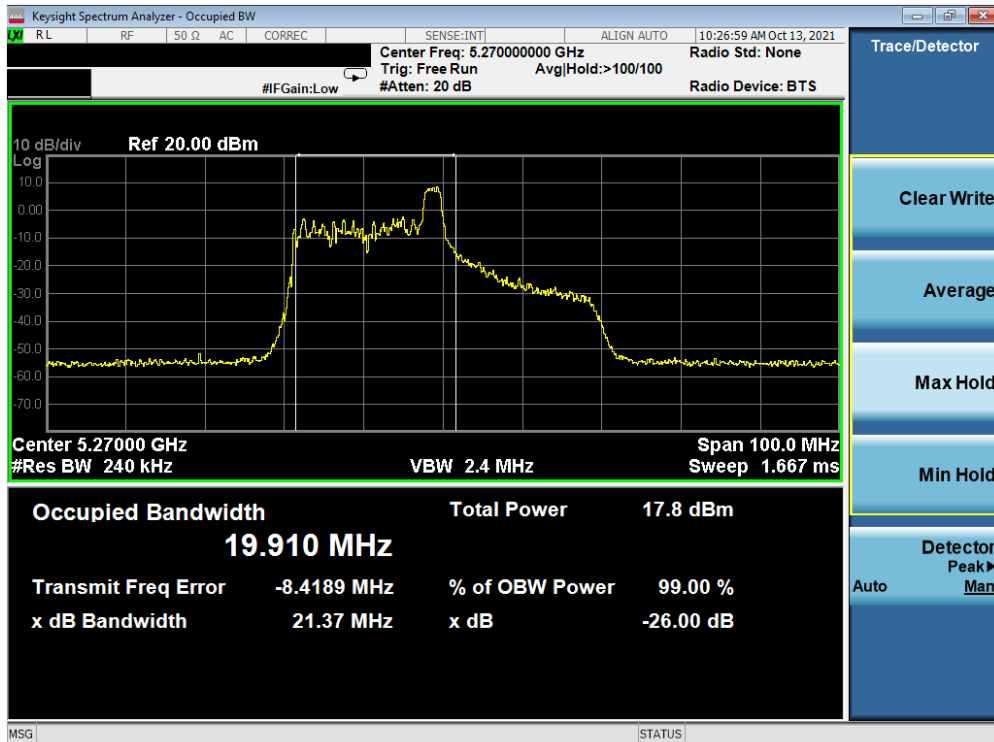


Plot 7-62. 26dB Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMS906E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 49 of 237

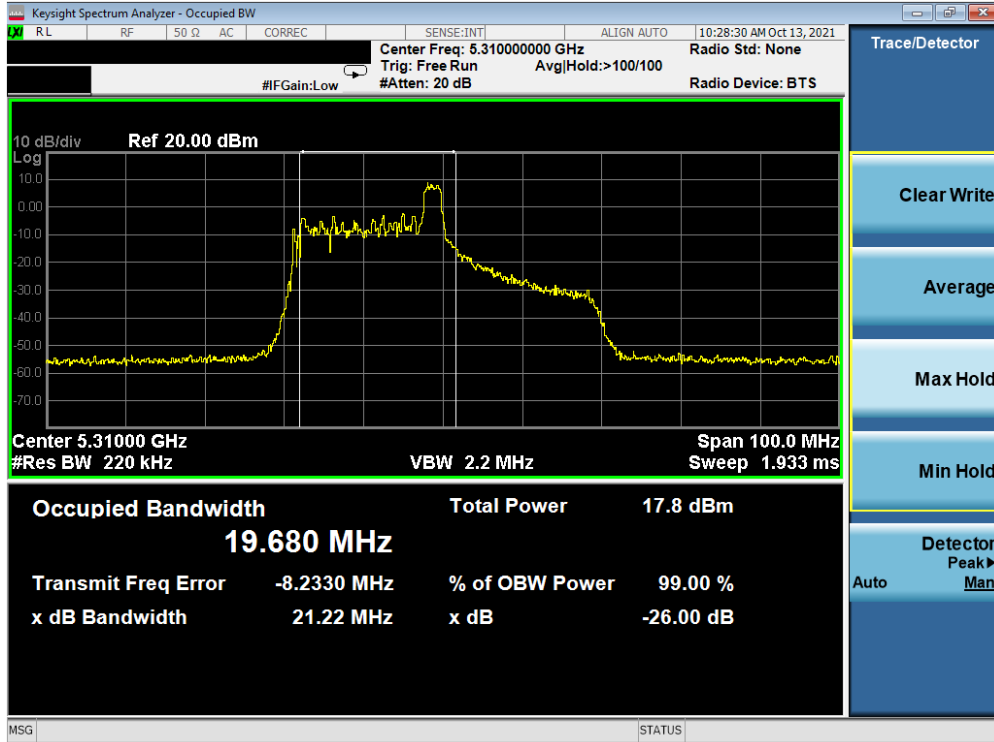


Plot 7-63. 26dB Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 62)

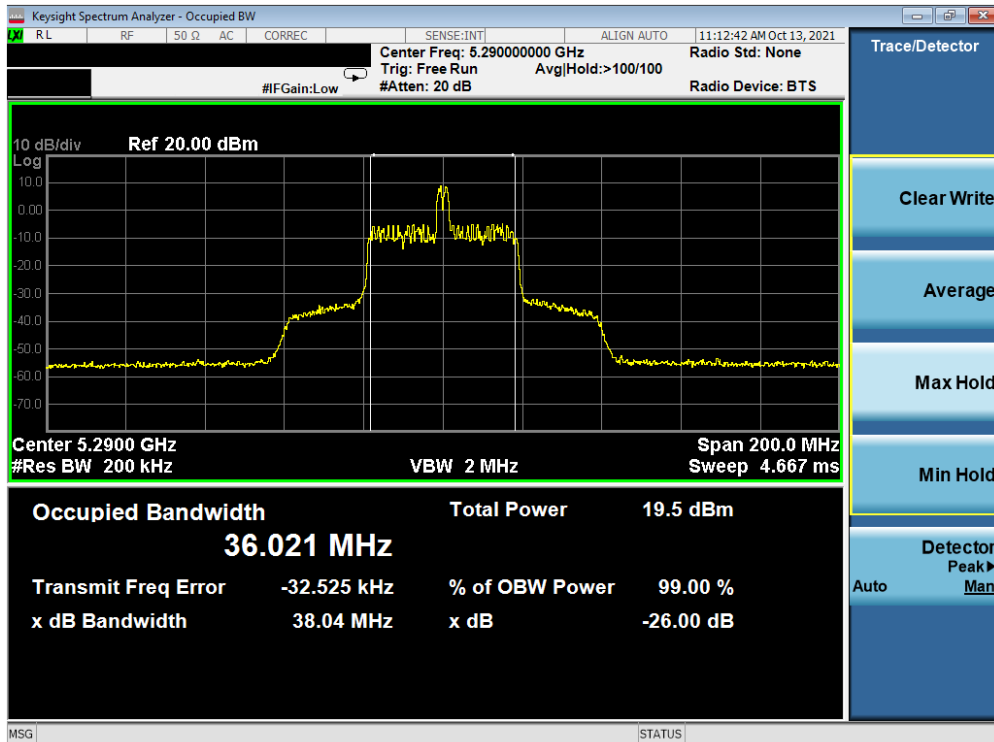


Plot 7-64. 26dB Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 50 of 237

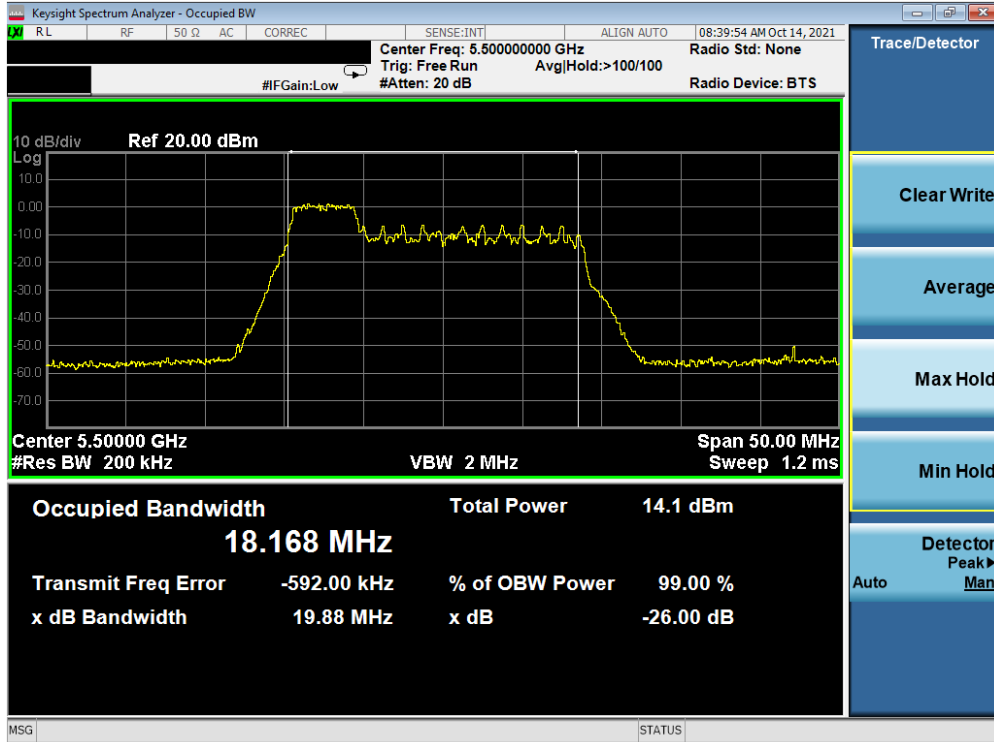


Plot 7-65. 26dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 100)

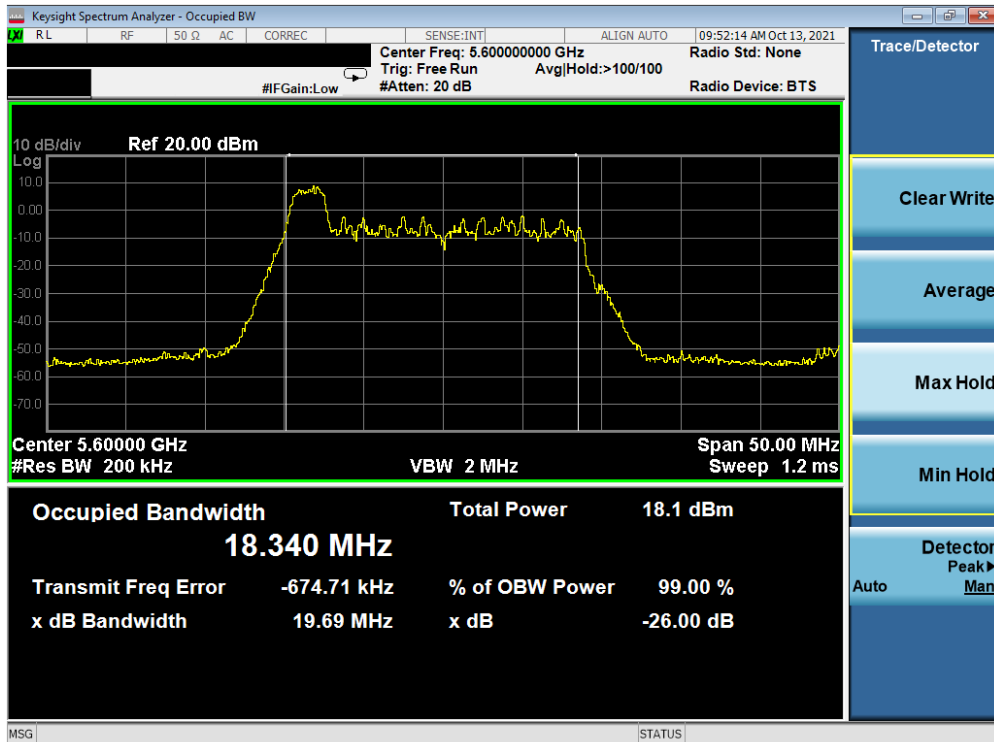


Plot 7-66. 26dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 51 of 237

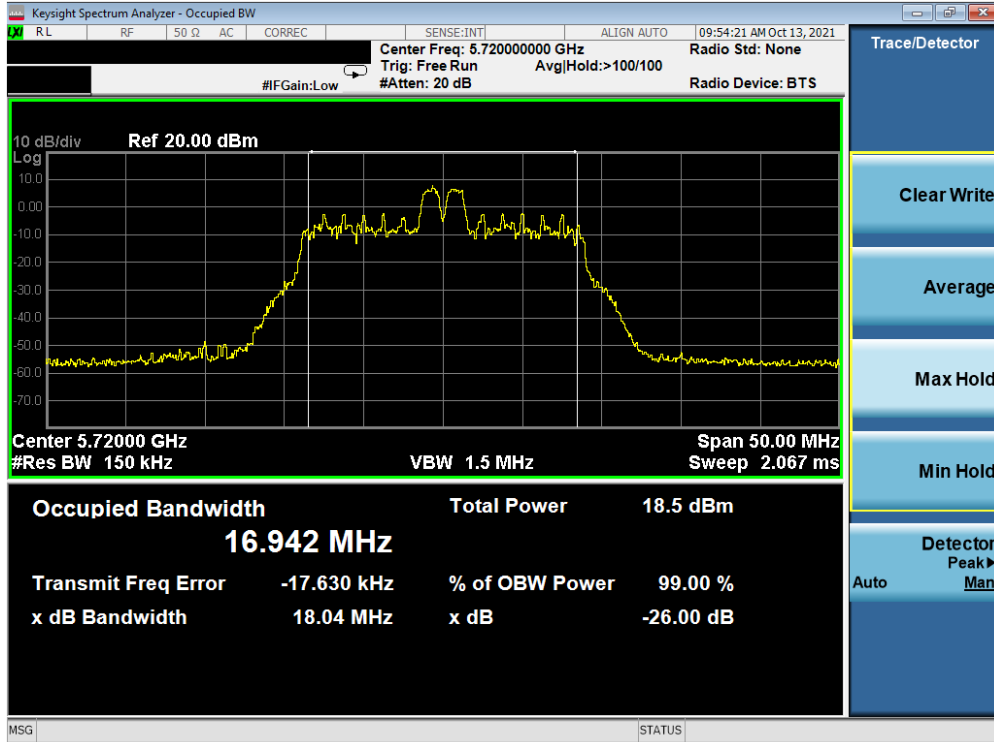


Plot 7-67. 26dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 144)

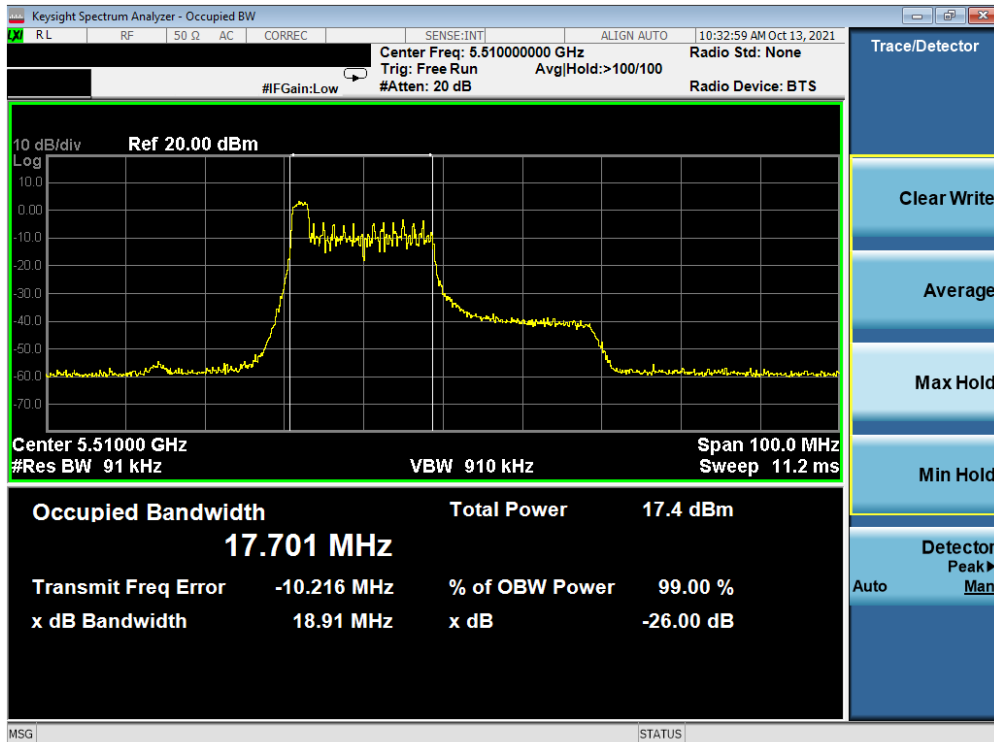


Plot 7-68. 26dB Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 102)

FCC ID: A3LSMS906E	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 52 of 237

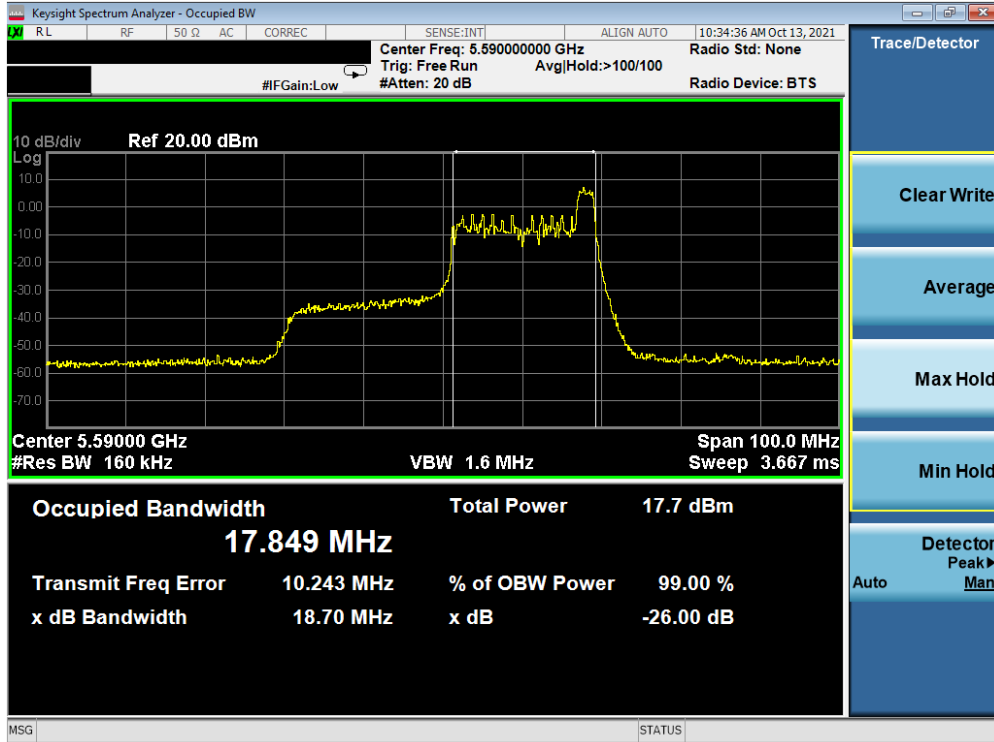


Plot 7-69. 26dB Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 118)

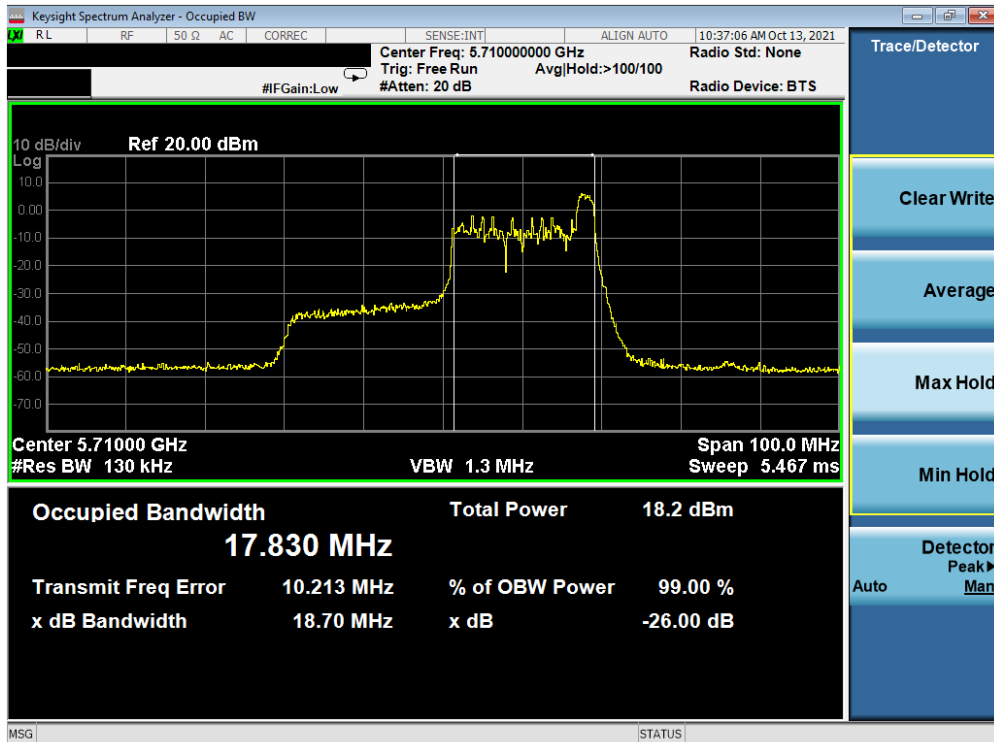


Plot 7-70. 26dB Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 142)

FCC ID: A3LSMS906E		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 53 of 237

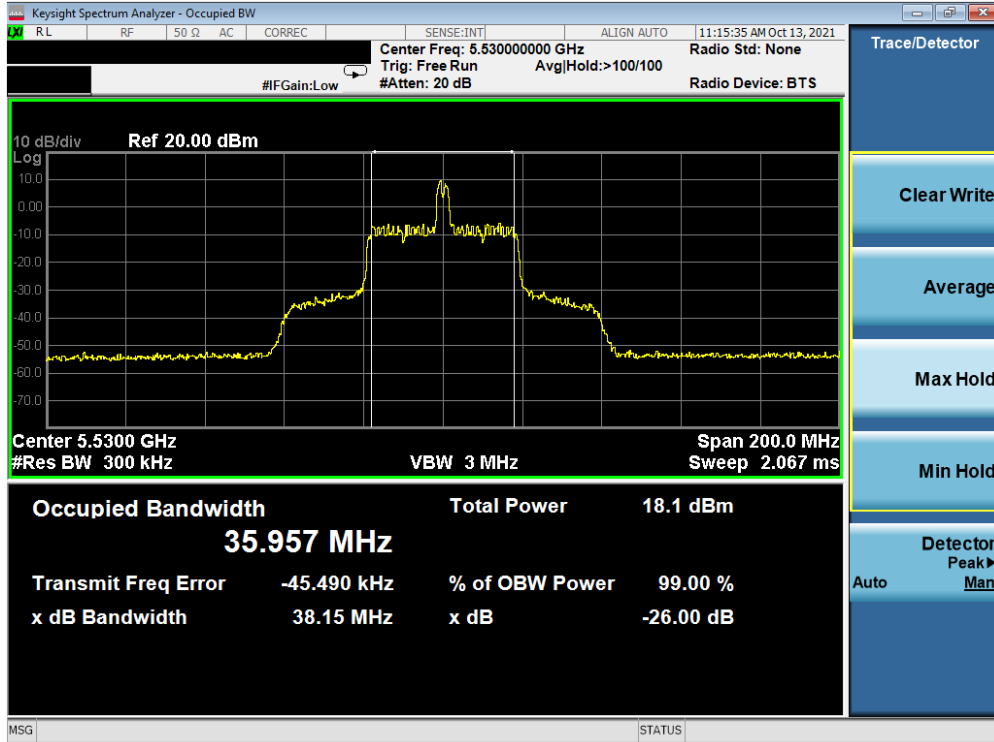


Plot 7-71. 26dB Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 106)

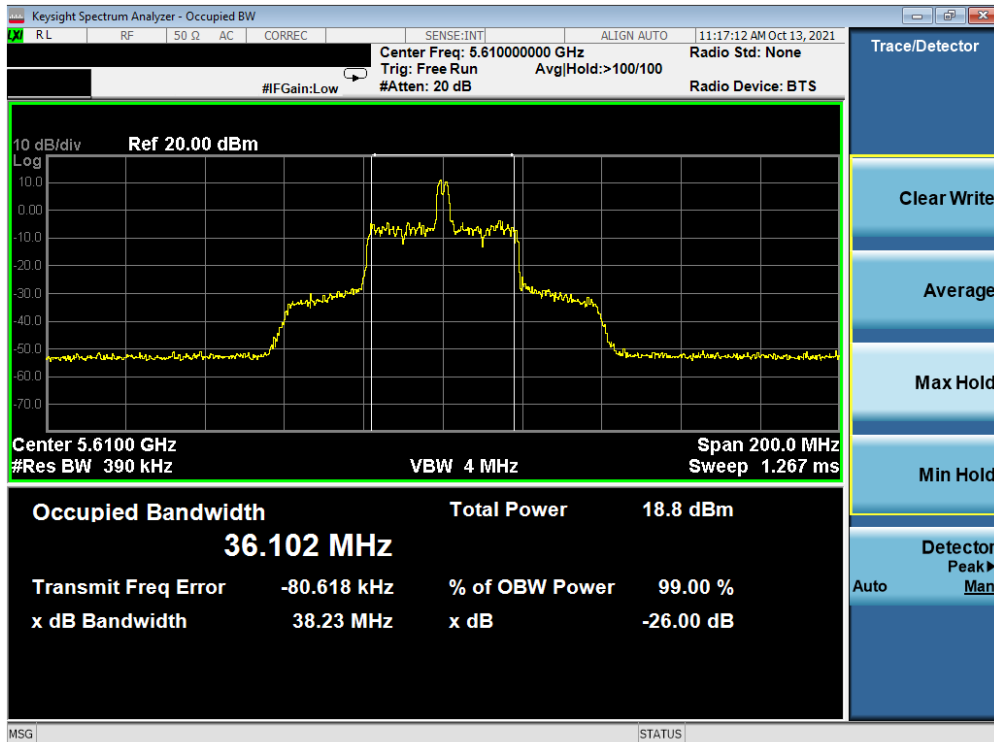


Plot 7-72. 26dB Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMS906E	Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 54 of 237

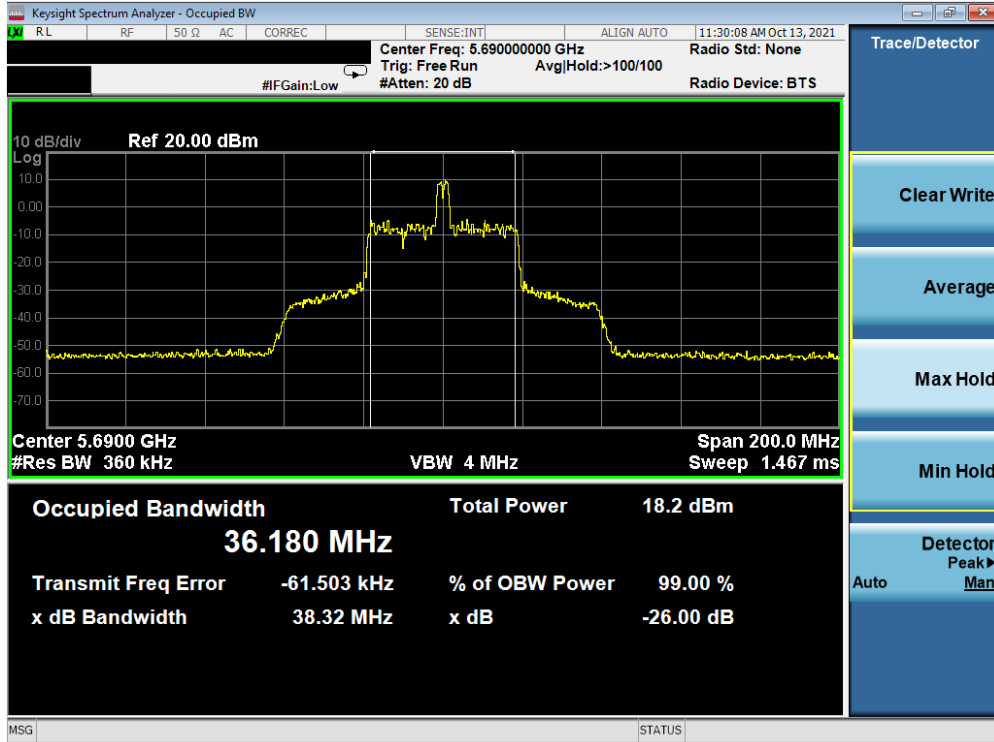


Plot 7-73. 26dB Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 138)

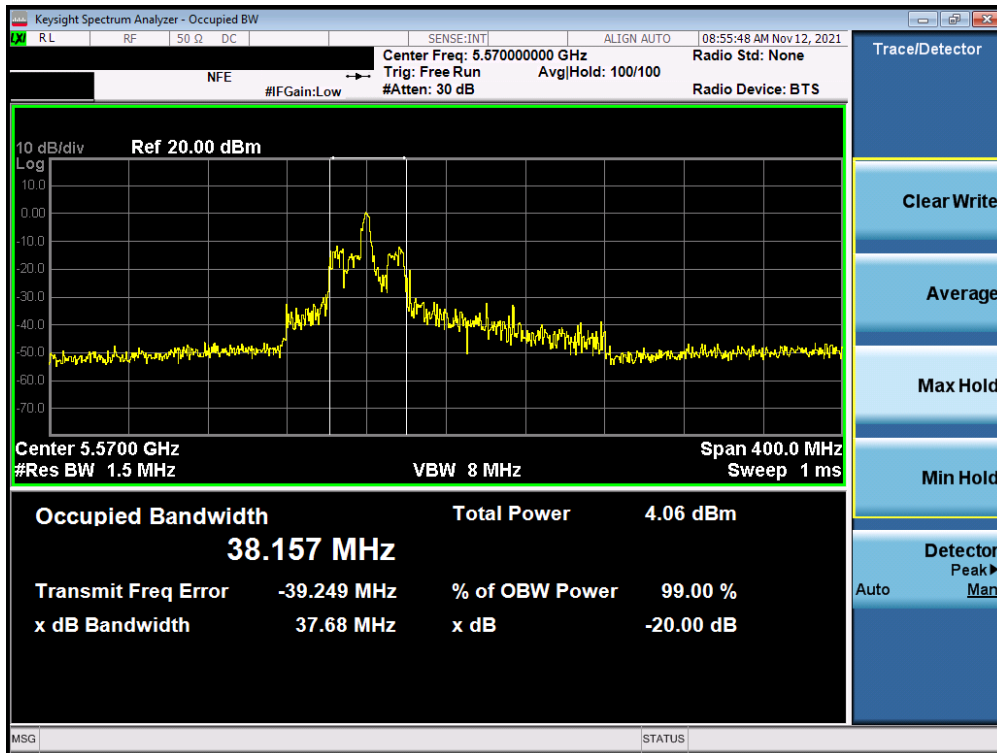

Plot 7-74. 26dB Bandwidth Plot MIMO ANT2 (160MHz BW (L) 802.11ax – 26 Tones (UNII Band 2C) – Ch. 114)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 55 of 237

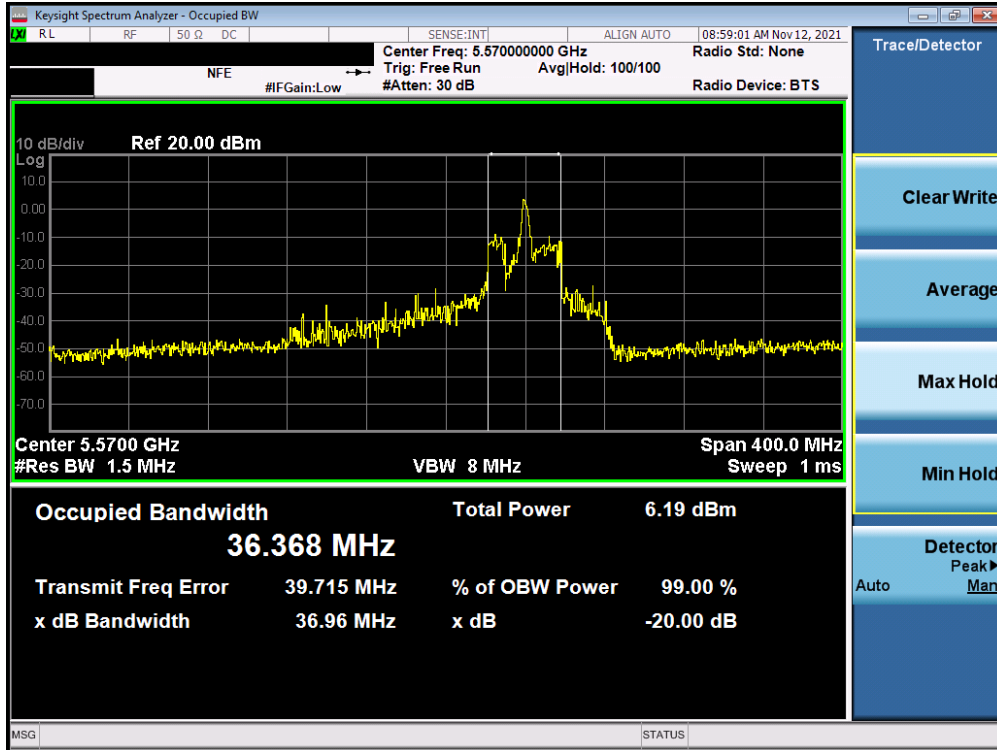

Plot 7-75. 26dB Bandwidth Plot MIMO ANT2 (160MHz BW (U) 802.11ax – 26 Tones (UNII Band 2C) – Ch. 114)


FCC ID: A3LSMS906E		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 56 of 237

MIMO Antenna-2 26dB Bandwidth Measurements (Full Tones)


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	ax (20MHz)	242T	MCS0	21.46
	5200	40	ax (20MHz)	242T	MCS0	21.33
	5240	48	ax (20MHz)	242T	MCS0	21.25
	5190	38	ax (40MHz)	484T	MCS0	40.80
	5230	46	ax (40MHz)	484T	MCS0	42.71
	5210	42	ax (80MHz)	996T	MCS0	94.68
Band 1/2A	5250	50	ax (160MHz L)	996T	MCS0	127.90
	5250	50	ax (160MHz U)	996T	MCS0	123.50
Band 2A	5260	52	ax (20MHz)	242T	MCS0	21.46
	5280	56	ax (20MHz)	242T	MCS0	21.55
	5320	64	ax (20MHz)	242T	MCS0	21.34
	5270	54	ax (40MHz)	484T	MCS0	40.13
	5310	62	ax (40MHz)	484T	MCS0	40.03
	5290	58	ax (80MHz)	996T	MCS0	81.05
Band 2C	5500	100	ax (20MHz)	242T	MCS0	21.23
	5600	120	ax (20MHz)	242T	MCS0	21.35
	5720	144	ax (20MHz)	242T	MCS0	21.49
	5510	102	ax (40MHz)	484T	MCS0	39.94
	5550	118	ax (40MHz)	484T	MCS0	39.89
	5710	142	ax (40MHz)	484T	MCS0	40.08
	5530	106	ax (80MHz)	996T	MCS0	81.17
	5610	122	ax (80MHz)	996T	MCS0	81.20
	5690	138	ax (80MHz)	996T	MCS0	81.04
	5570	114	ax (160MHz L)	996T	MCS0	96.62
	5570	114	ax (160MHz U)	996T	MCS0	84.38

Table 7-5. Conducted Bandwidth Measurements MIMO ANT2 (Full Tones)

FCC ID: A3LSMS906E		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 57 of 237

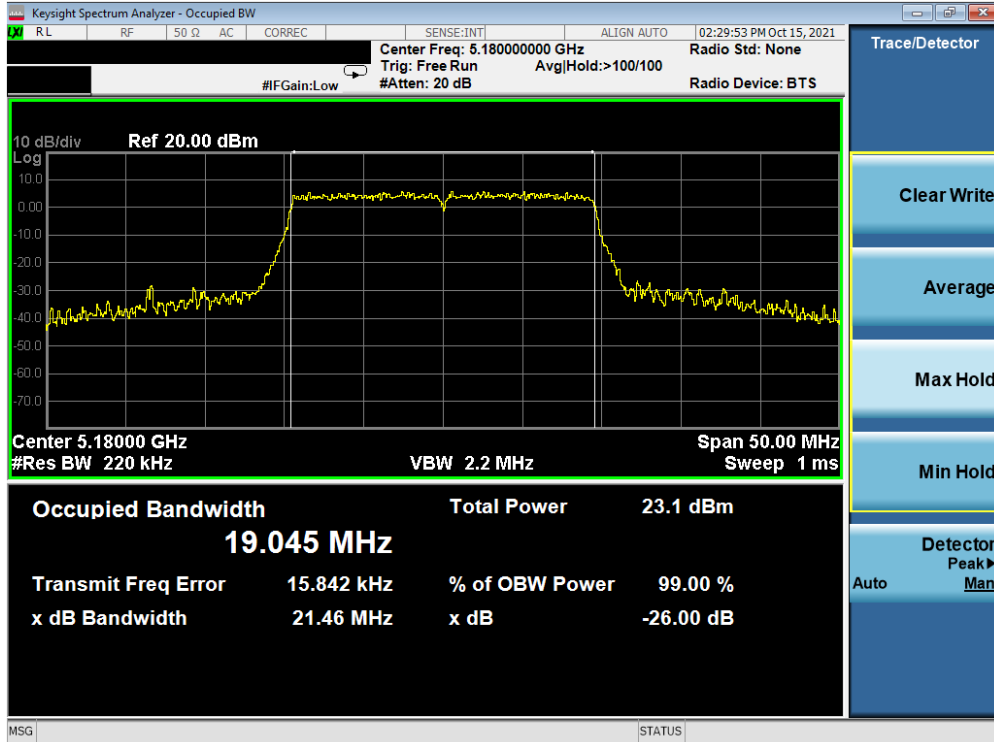


Plot 7-76. 26dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 1) – Ch. 36)

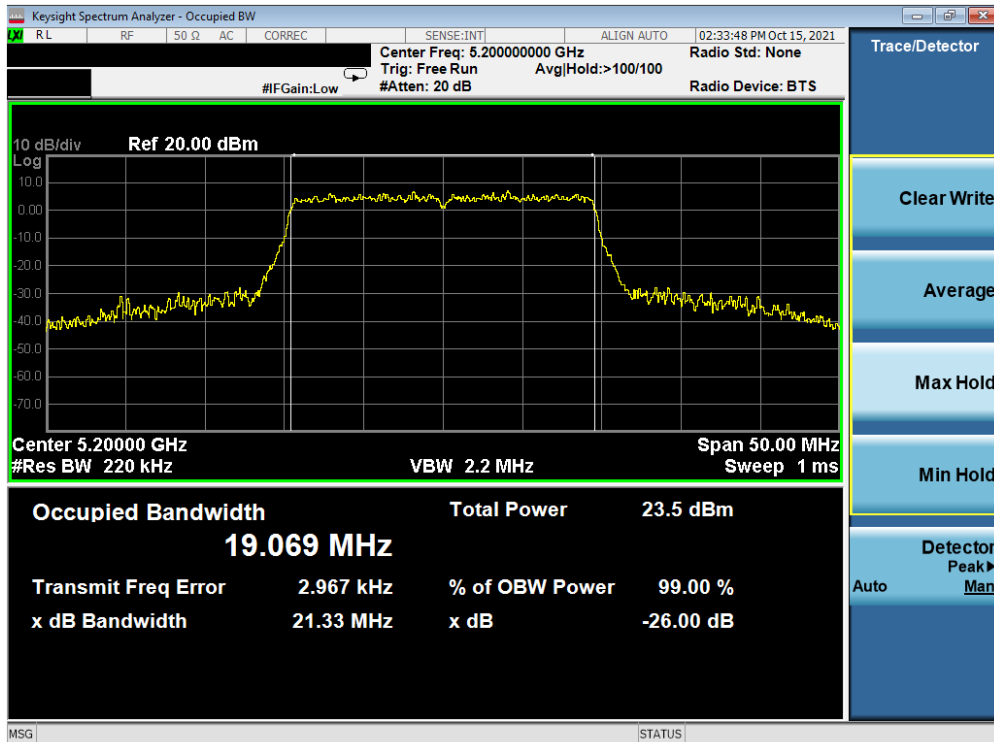


Plot 7-77. 26dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 1) – Ch. 40)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 58 of 237

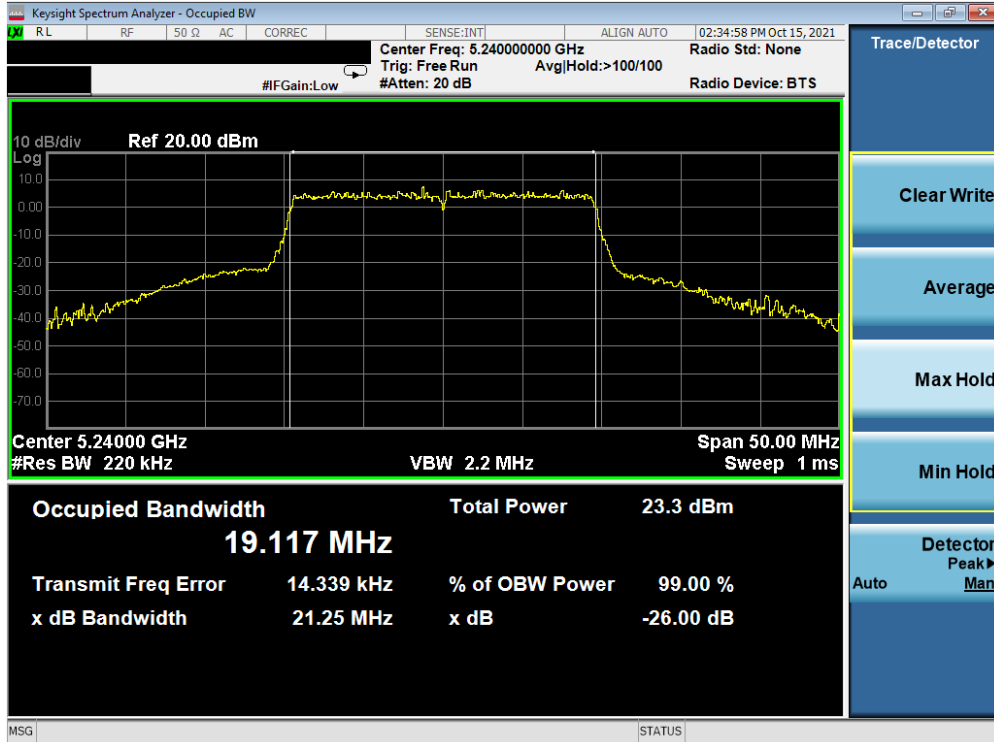


Plot 7-78. 26dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 1) – Ch. 48)

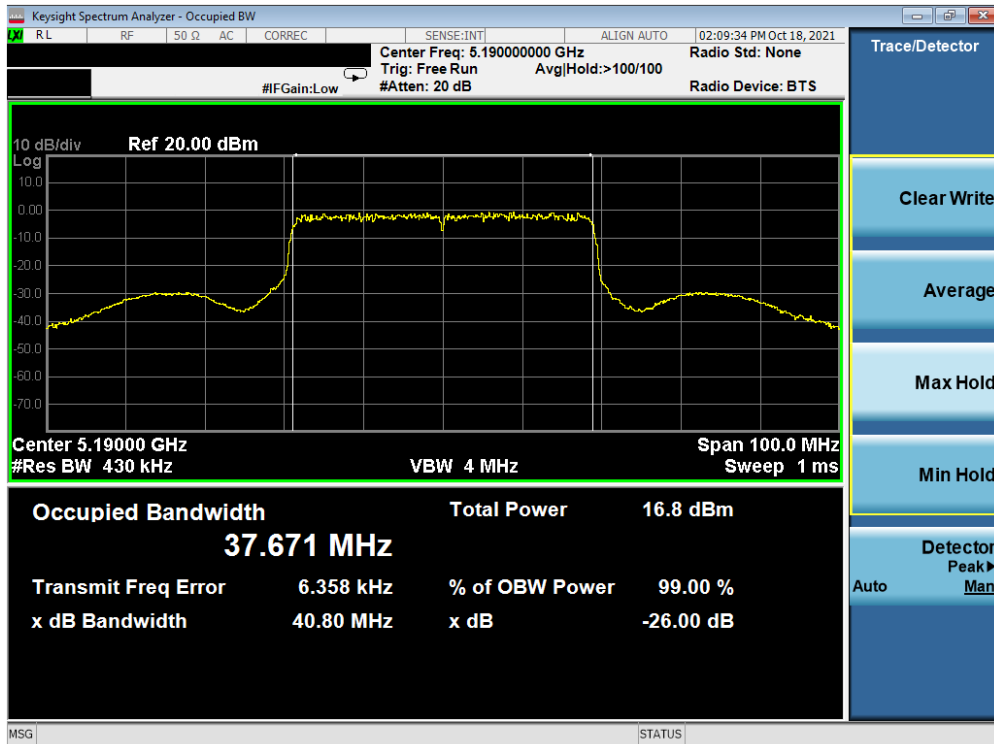


Plot 7-79. 26dB Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 1) – Ch. 38)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 59 of 237

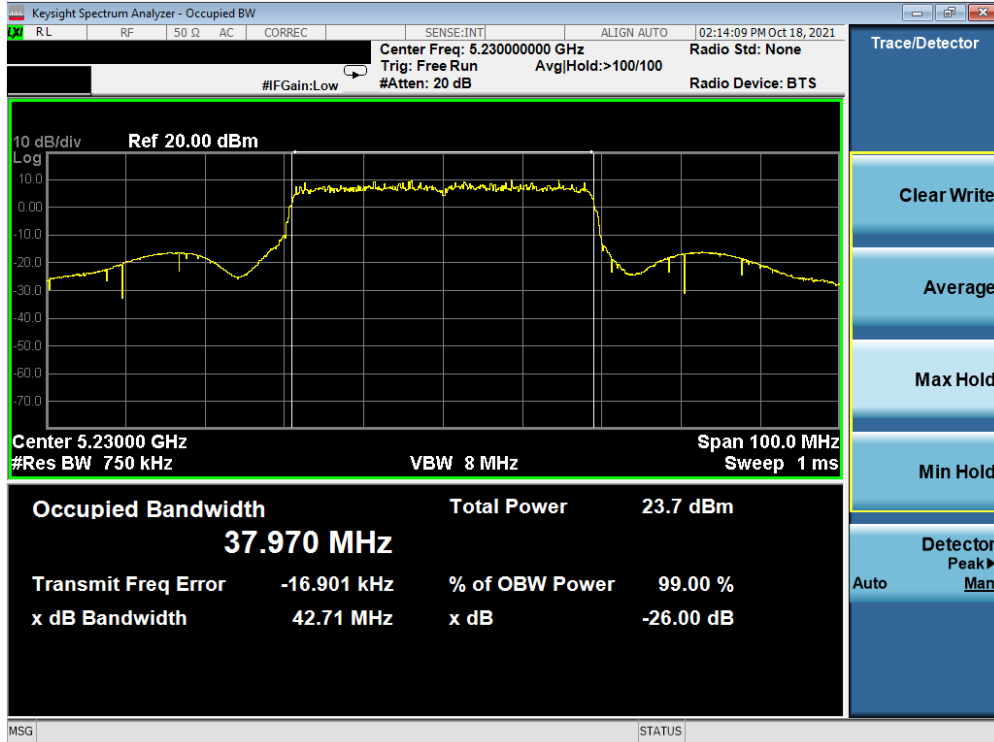

Plot 7-80. 26dB Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 1) – Ch. 46)

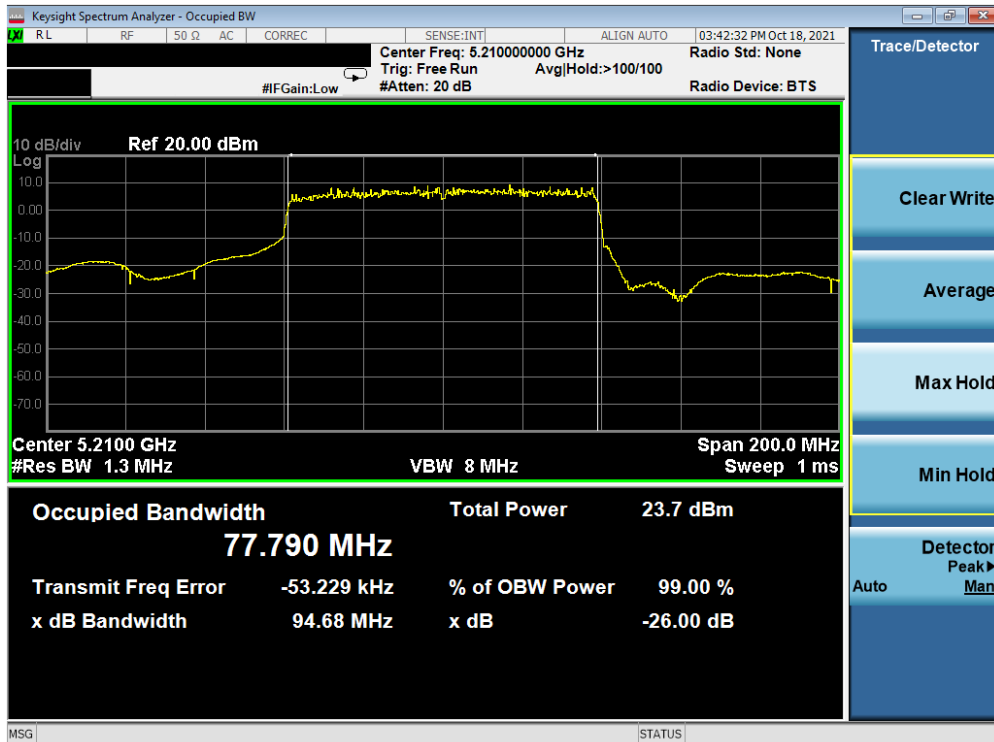

Plot 7-81. 26dB Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax – 996 Tones (UNII Band 1) – Ch. 42)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 60 of 237




Plot 7-82. 26dB Bandwidth Plot MIMO ANT2 (160MHz BW (L) 802.11ax – 996 Tones (UNII Band 1/2A) – Ch. 50)




Plot 7-83. 26dB Bandwidth Plot MIMO ANT2 (160MHz BW (U) 802.11ax – 996 Tones (UNII Band 1/2A) – Ch. 50)

FCC ID: A3LSMS906E	Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 61 of 237

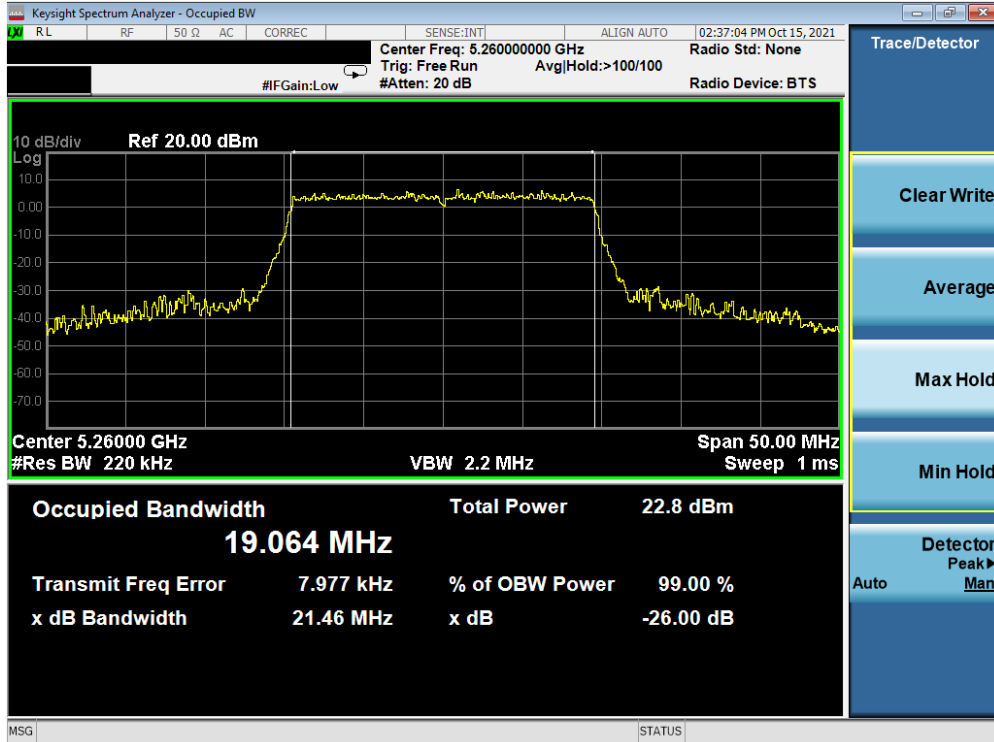


Plot 7-84. 26dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 2A) – Ch. 52)

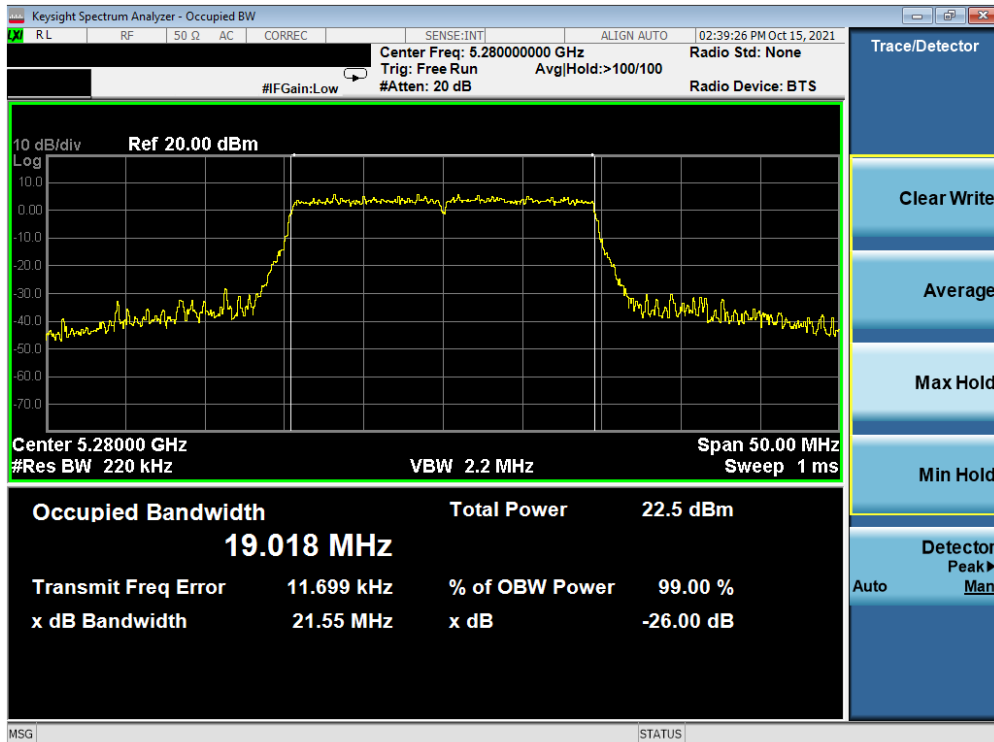


Plot 7-85. 26dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 62 of 237

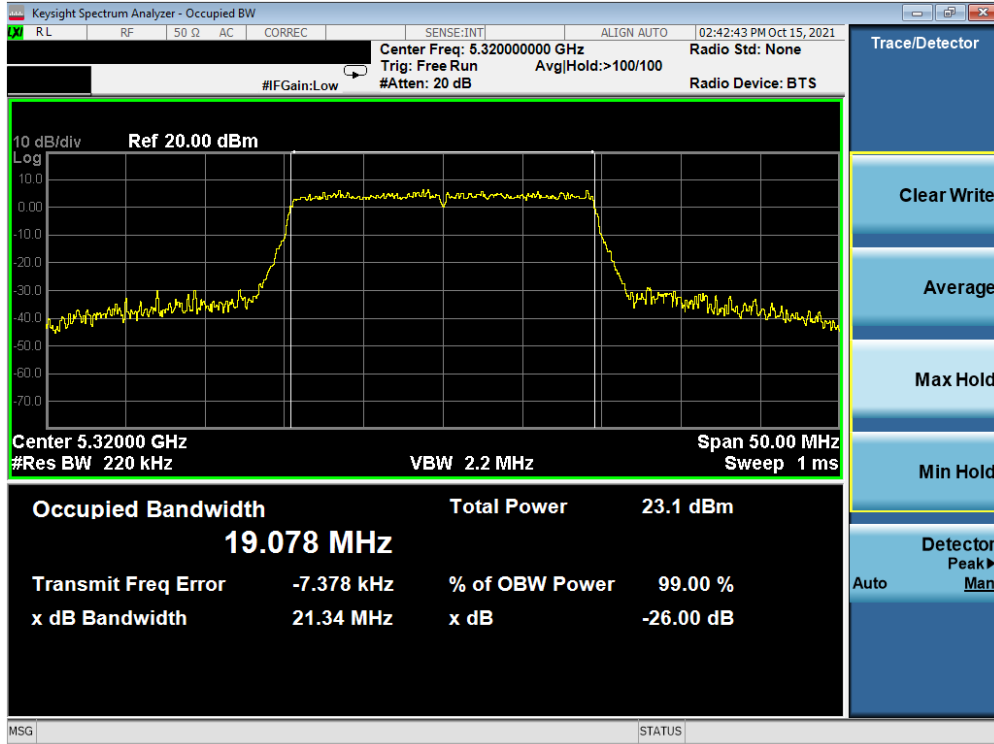


Plot 7-86. 26dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 2A) – Ch. 64)

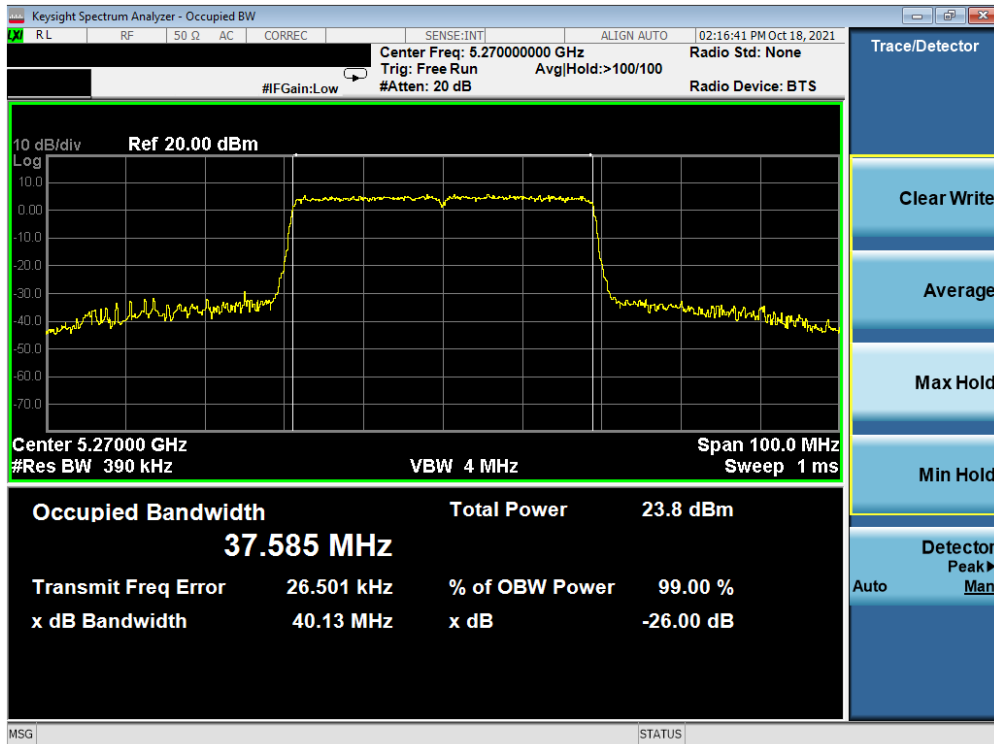


Plot 7-87. 26dB Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 63 of 237

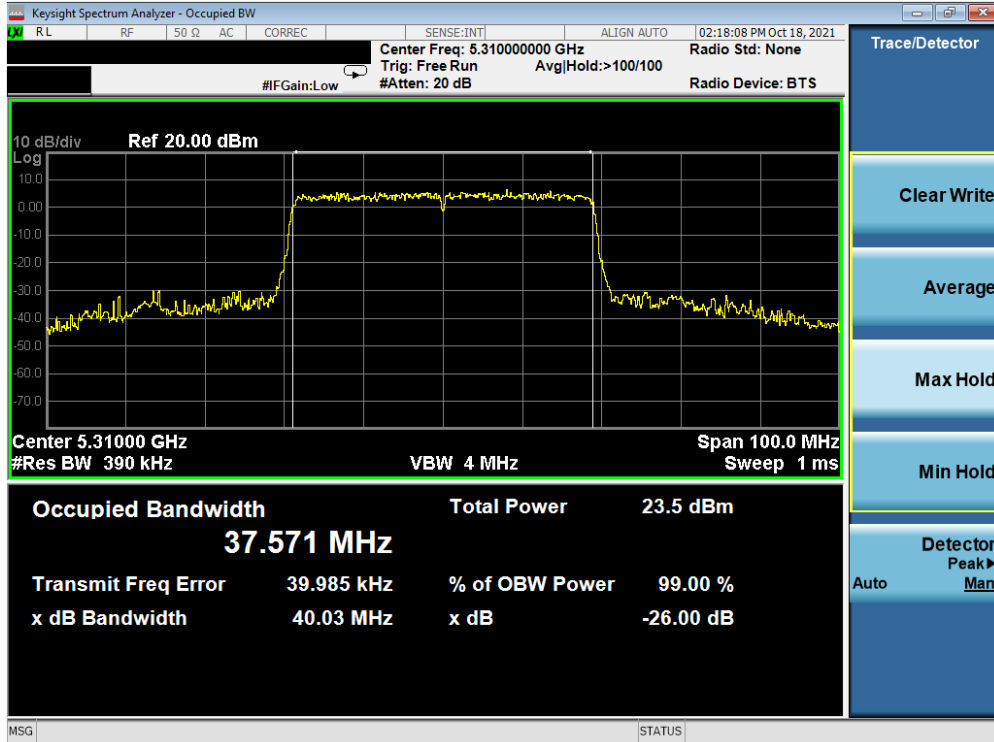


Plot 7-88. 26dB Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 2A) – Ch. 62)

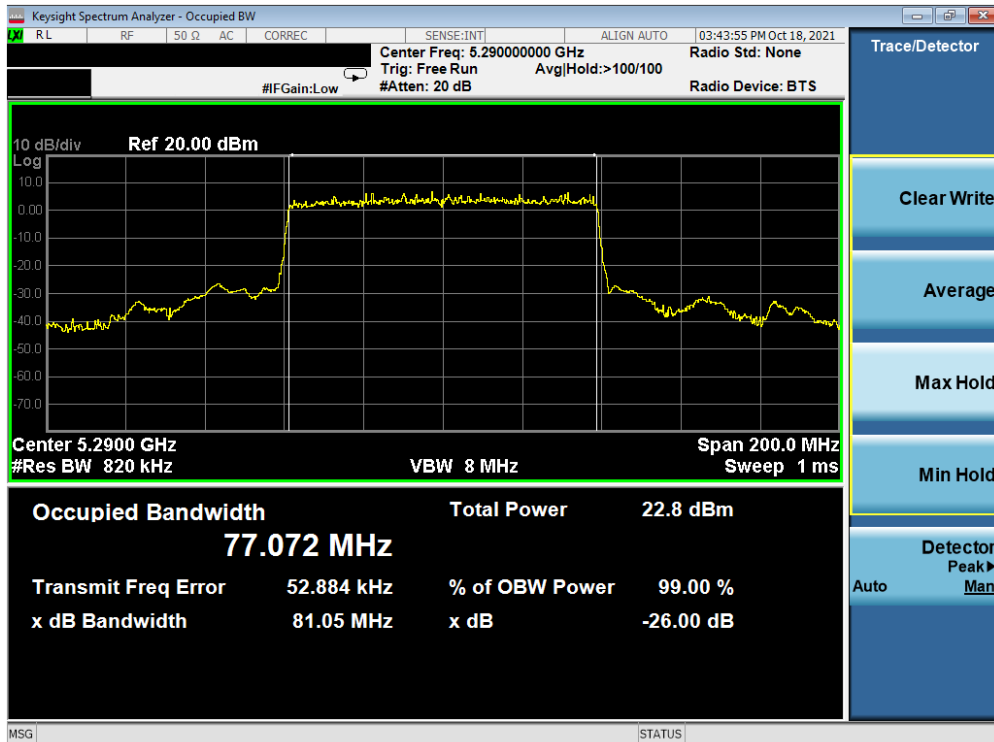


Plot 7-89. 26dB Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax – 996 Tones (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 64 of 237

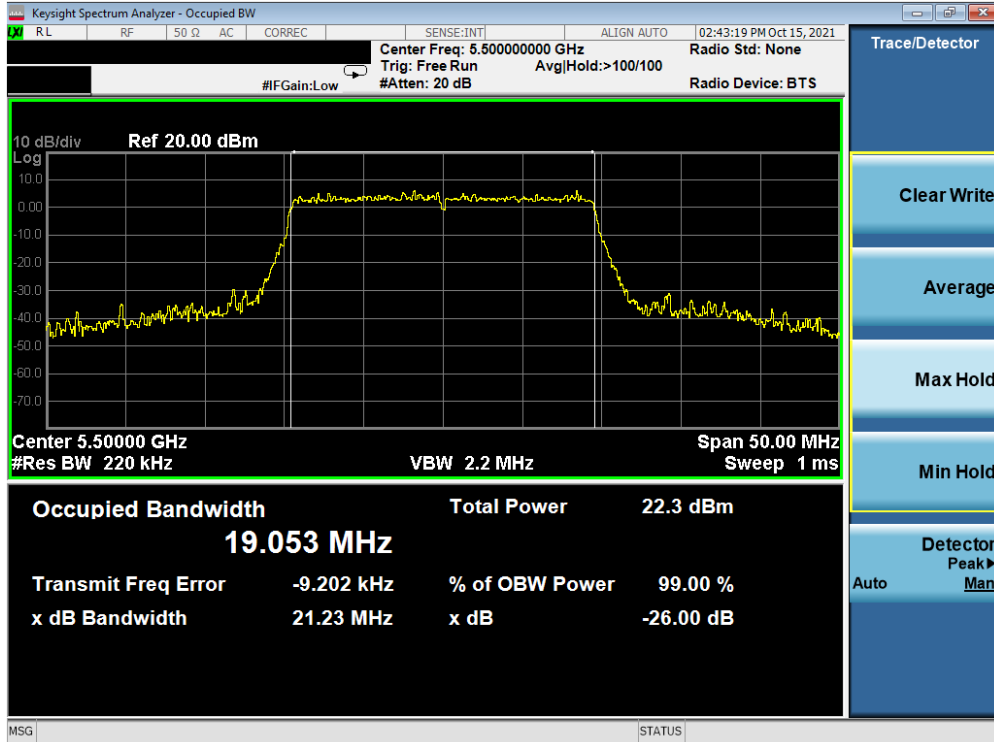


Plot 7-90. 26dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 2C) – Ch. 100)

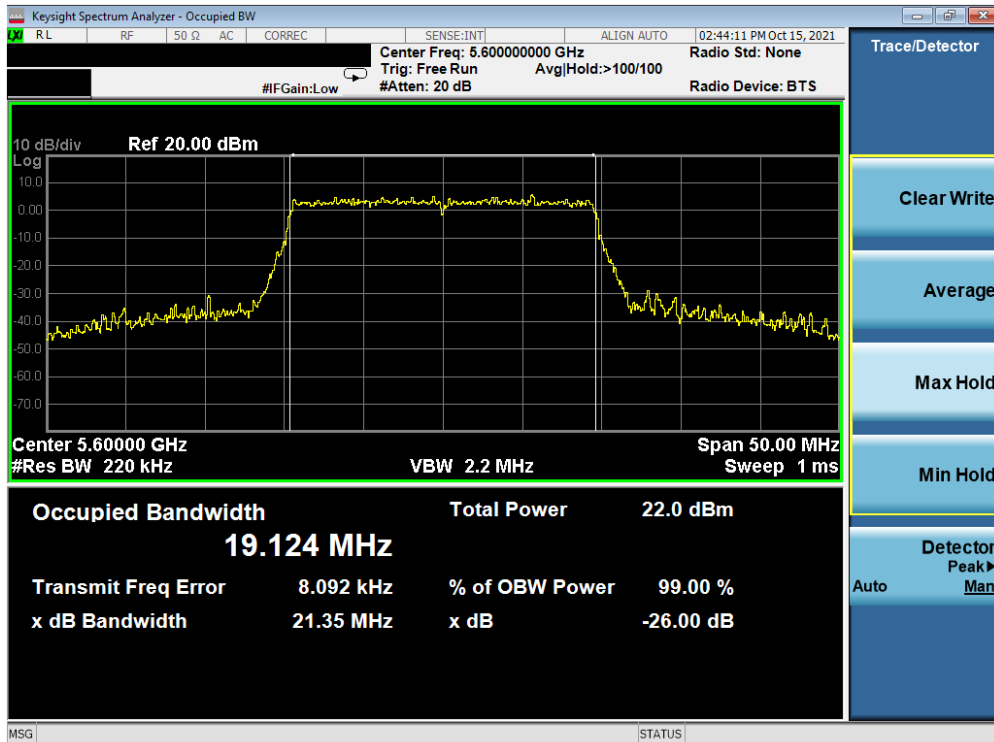


Plot 7-91. 26dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 65 of 237

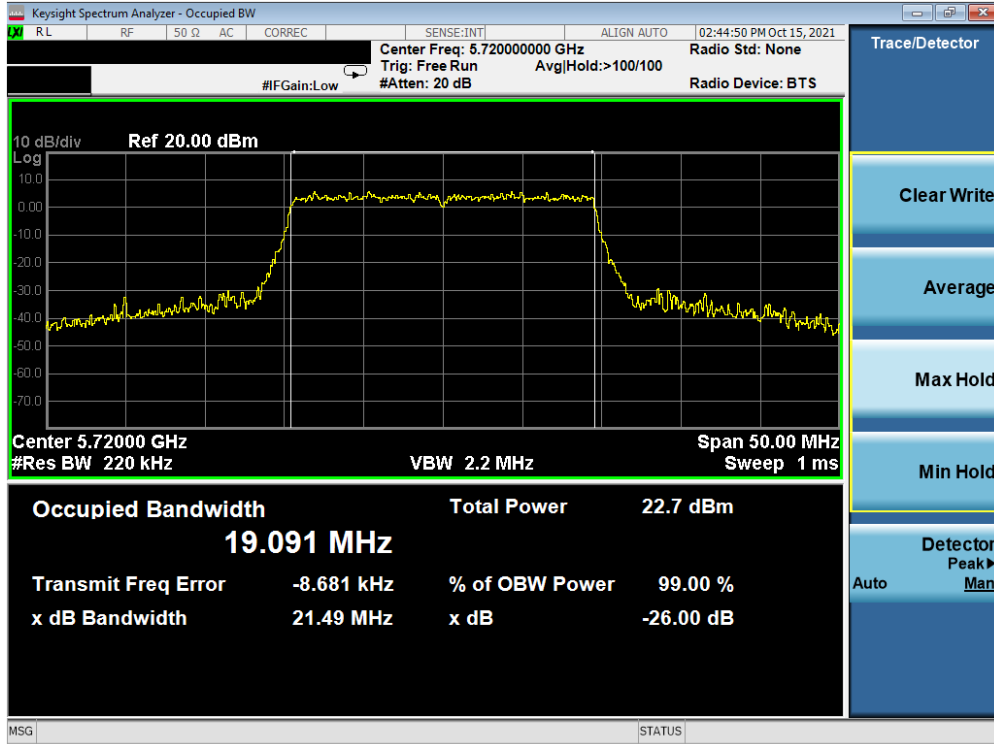


Plot 7-92. 26dB Bandwidth Plot MIMO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 2C) – Ch. 144)

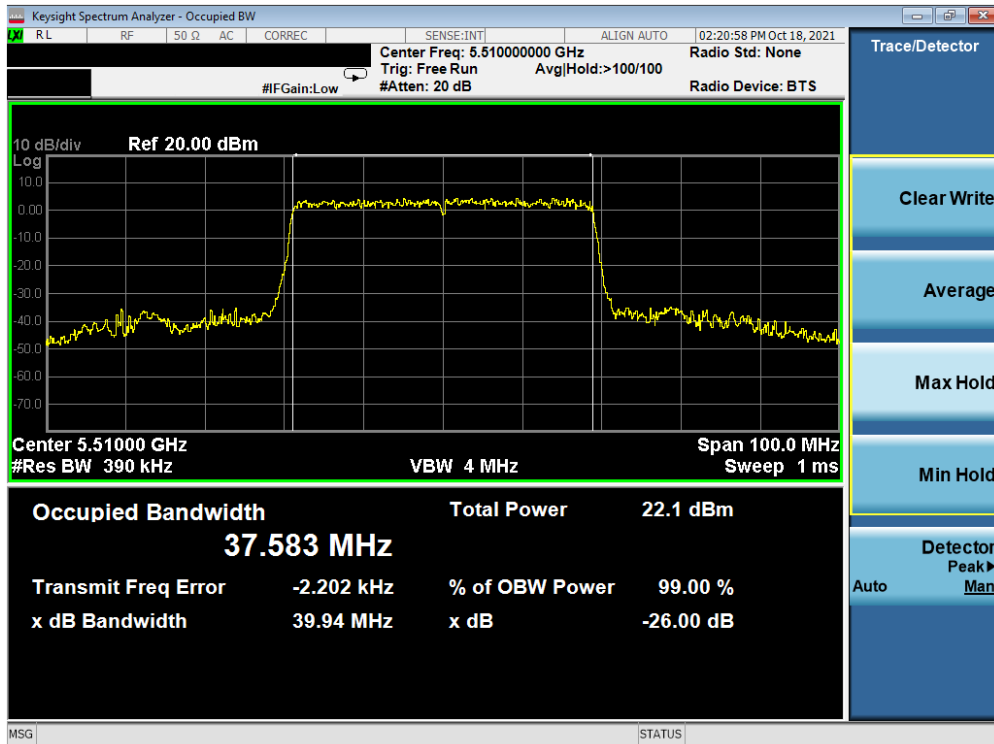


Plot 7-93. 26dB Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 2C) – Ch. 102)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 66 of 237

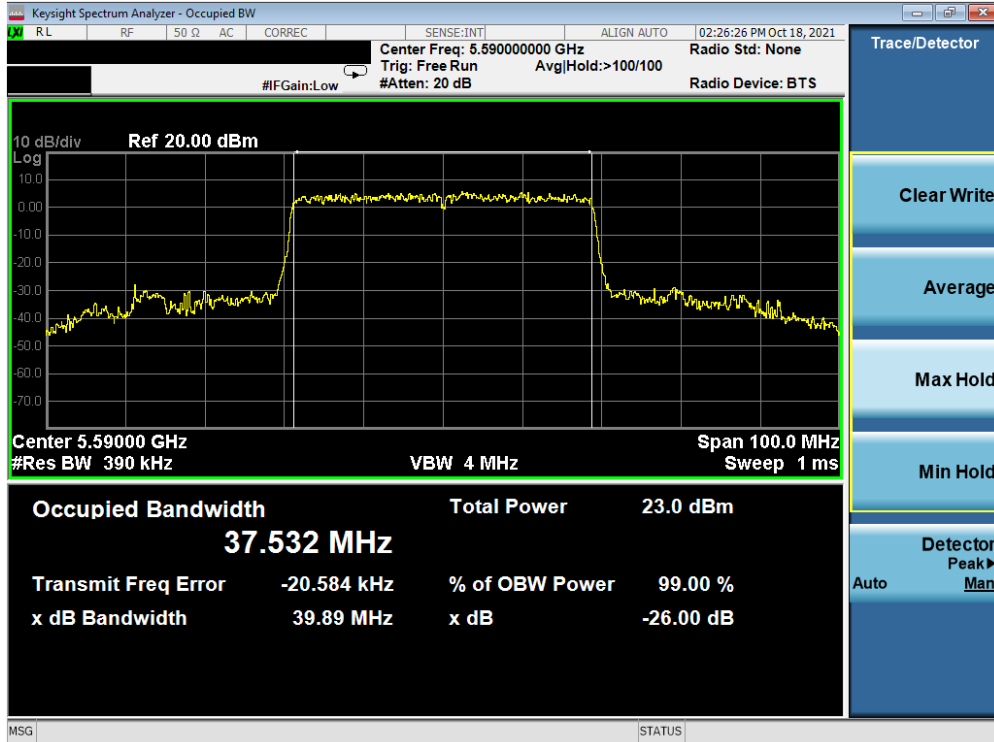


Plot 7-94. 26dB Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 2C) – Ch. 118)

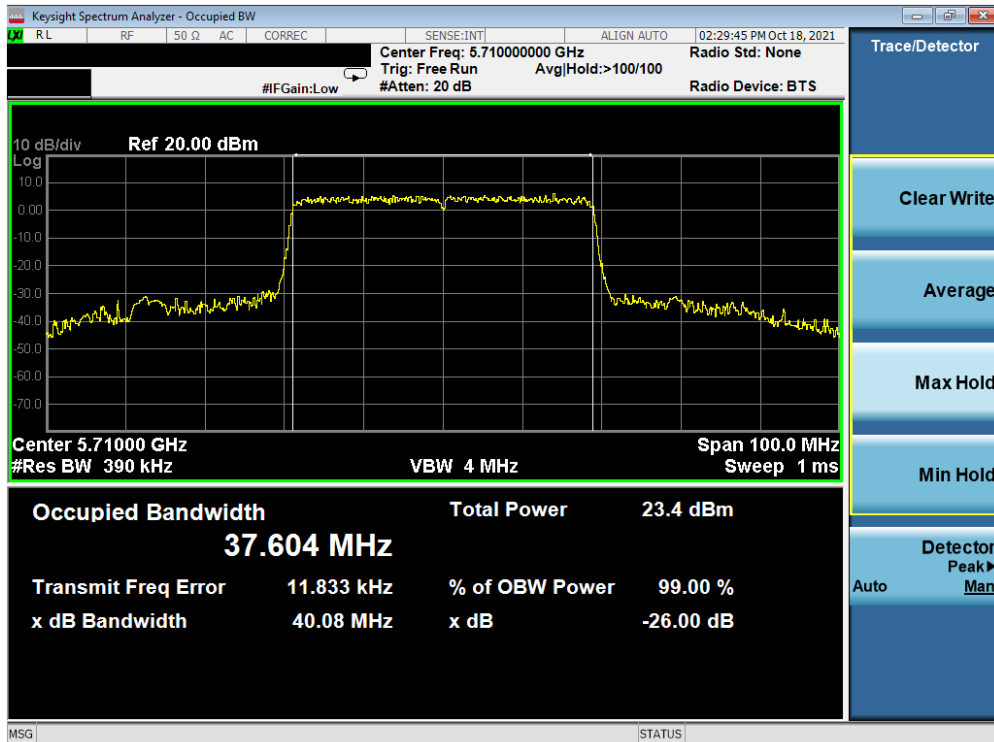


Plot 7-95. 26dB Bandwidth Plot MIMO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 2C) – Ch. 142)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 67 of 237

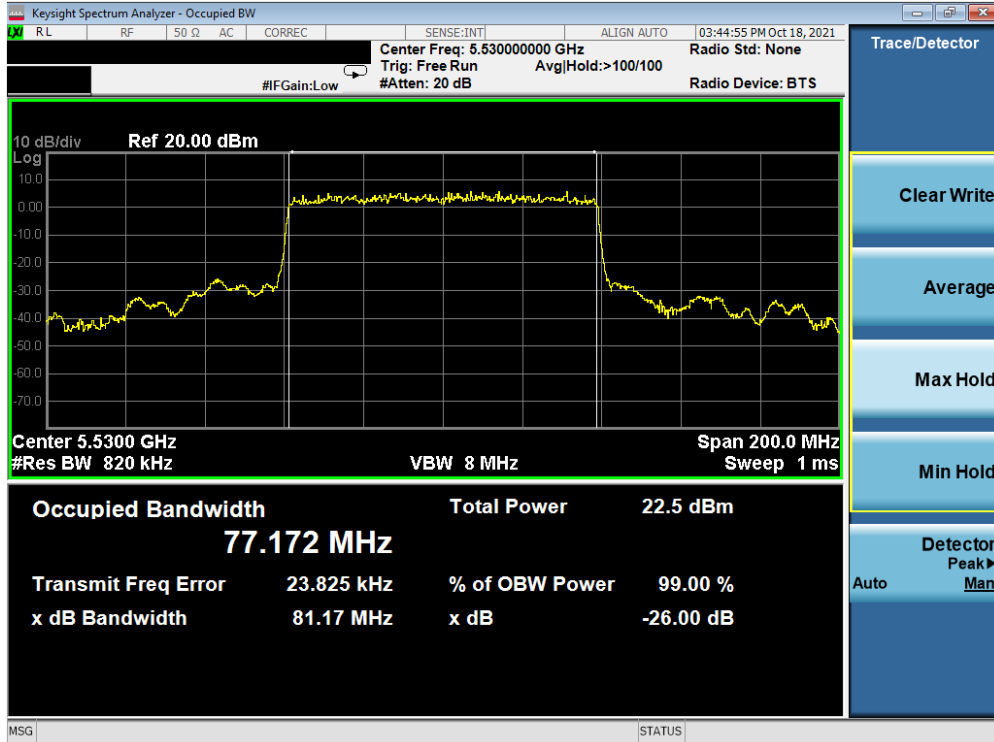


Plot 7-96. 26dB Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax – 996 Tones (UNII Band 2C) – Ch. 106)

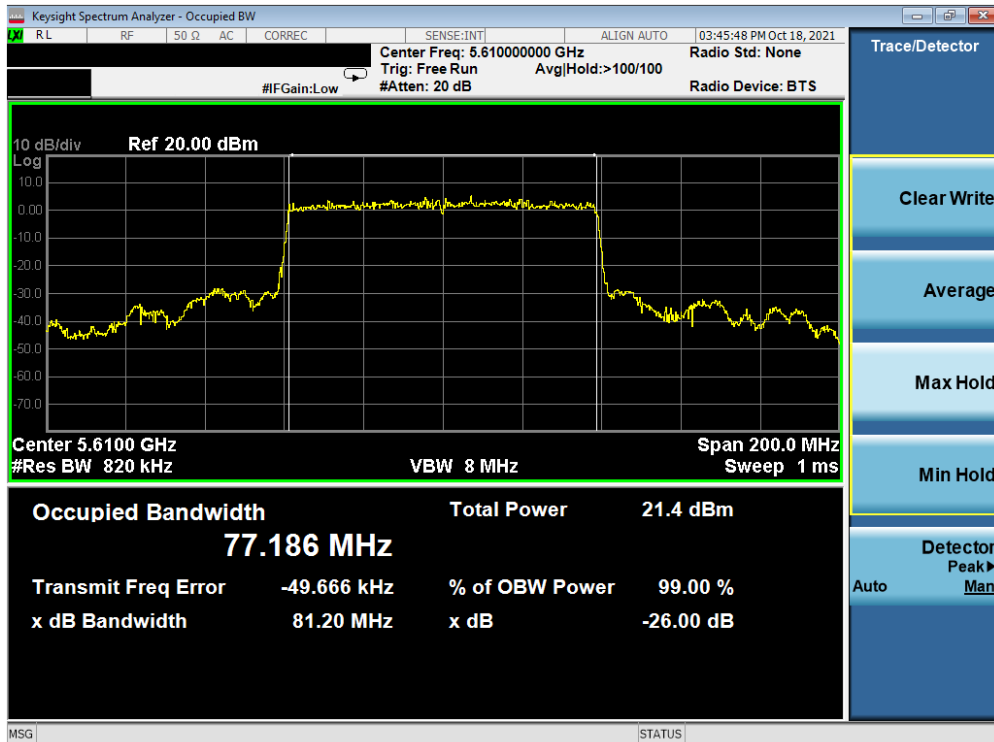


Plot 7-97. 26dB Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax – 996 Tones (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 68 of 237

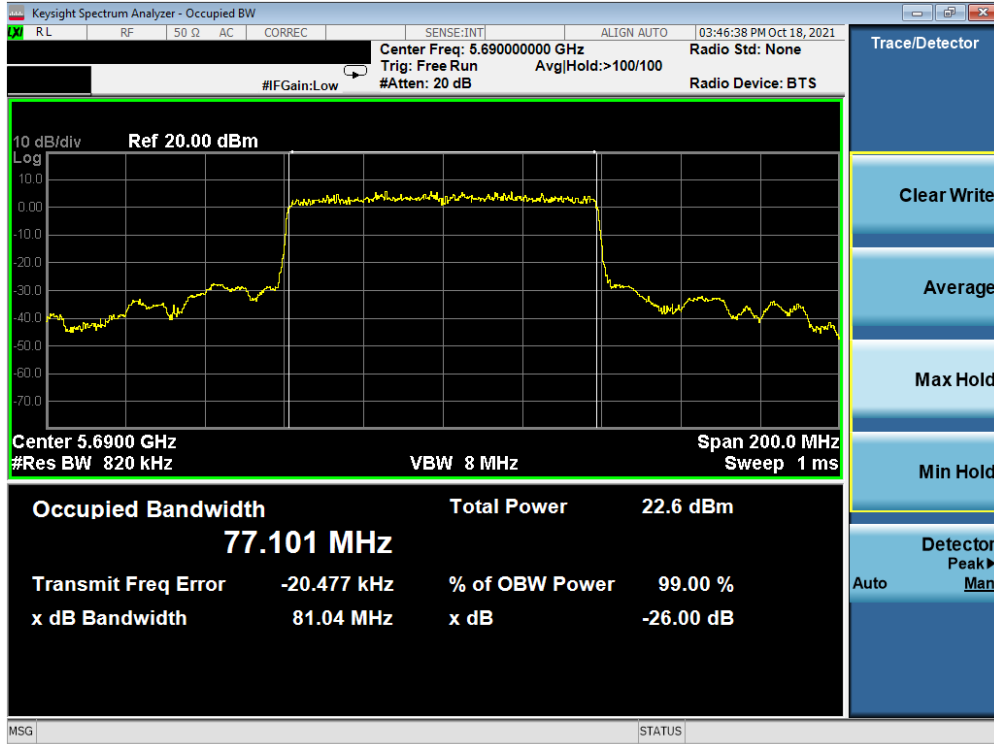


Plot 7-98. 26dB Bandwidth Plot MIMO ANT2 (80MHz BW 802.11ax – 996 Tones (UNII Band 2C) – Ch. 138)

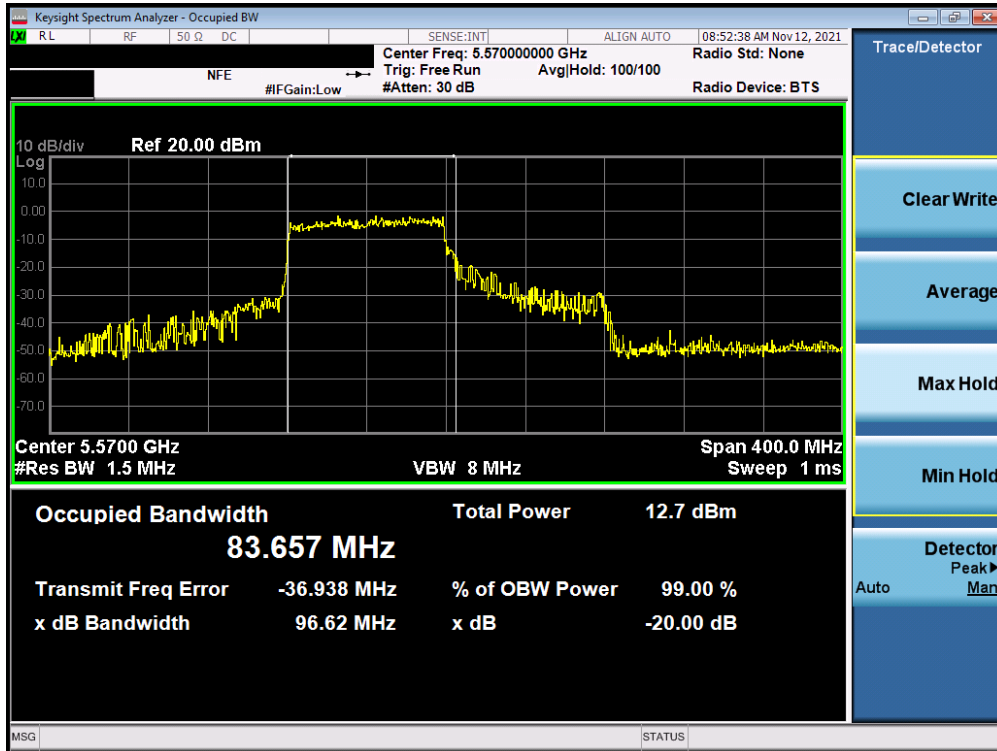

Plot 7-99. 26dB Bandwidth Plot MIMO ANT2 (160MHz BW (L) 802.11ax – 996 Tones (UNII Band 2C) – Ch. 114)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 69 of 237

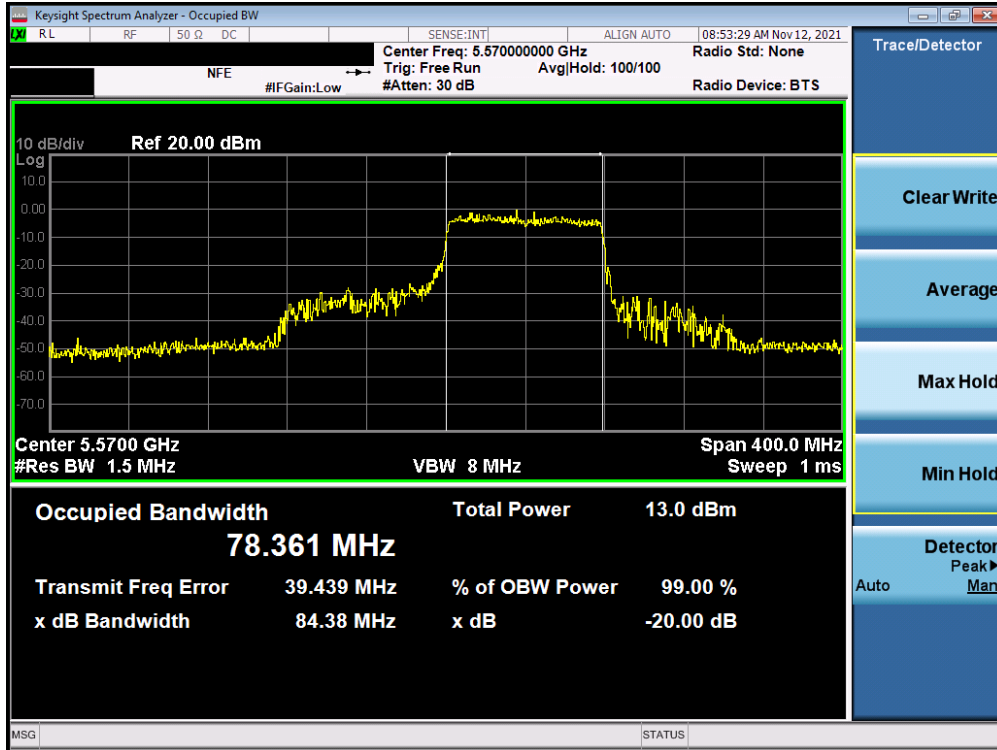

Plot 7-100. 26dB Bandwidth Plot MIMO ANT2 (160MHz BW (U) 802.11ax – 996 Tones (UNII Band 2C) – Ch. 114)

FCC ID: A3LSMS906E		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 70 of 237

7.3 6dB Bandwidth Measurement – 802.11ax OFDMA §15.407 (e); RSS-Gen [6.7]

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

In the 5.725 – 5.850GHz and 5.850 – 5.895 bands, the 6dB bandwidth must be ≥ 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 6.9.2
KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW ≥ 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes

The 6dB Bandwidth measurement for each channel was measured with the RU index showing the highest conducted power.


FCC ID: A3LSMS906E		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 71 of 237

MIMO Antenna-1 6 dB Bandwidth Measurements (26 Tones)


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3	5745	149	ax (20MHz)	26T	MCS0	2.09
	5785	157	ax (20MHz)	26T	MCS0	2.65
	5825	165	ax (20MHz)	26T	MCS0	2.69
	5755	151	ax (40MHz)	26T	MCS0	2.11
	5795	159	ax (40MHz)	26T	MCS0	2.12
	5775	155	ax (80MHz)	26T	MCS0	2.79

Table 7-6. Conducted Bandwidth Measurements MIMO ANT1 (26 Tones)

FCC ID: A3LSMS906E		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset	Page 72 of 237	

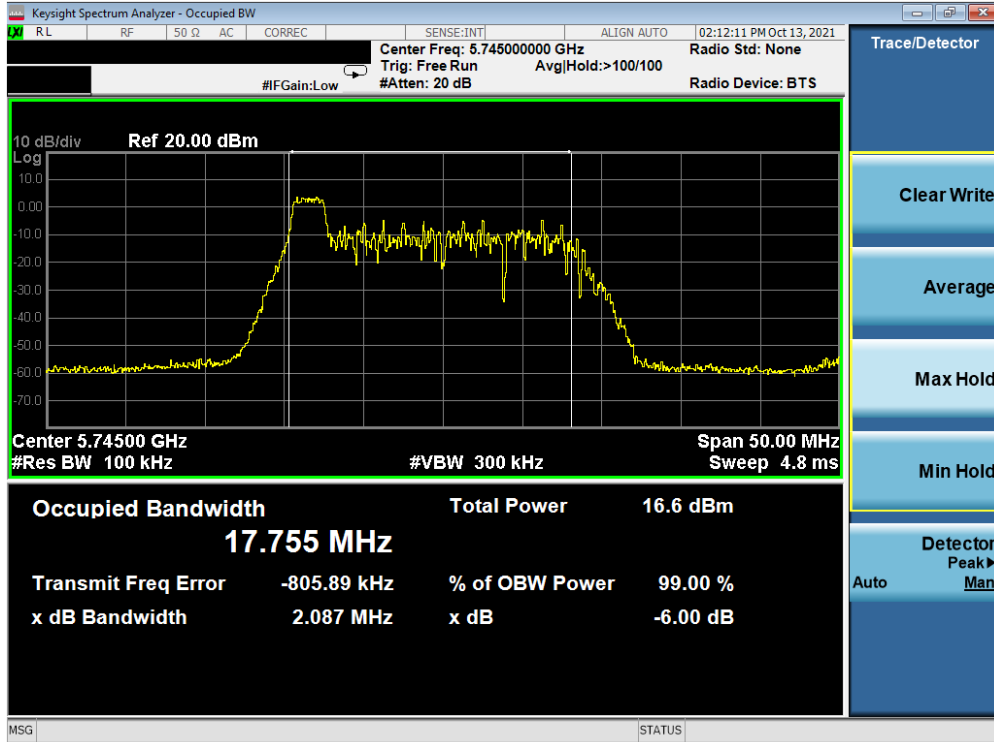


Plot 7-101. 6dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 149)

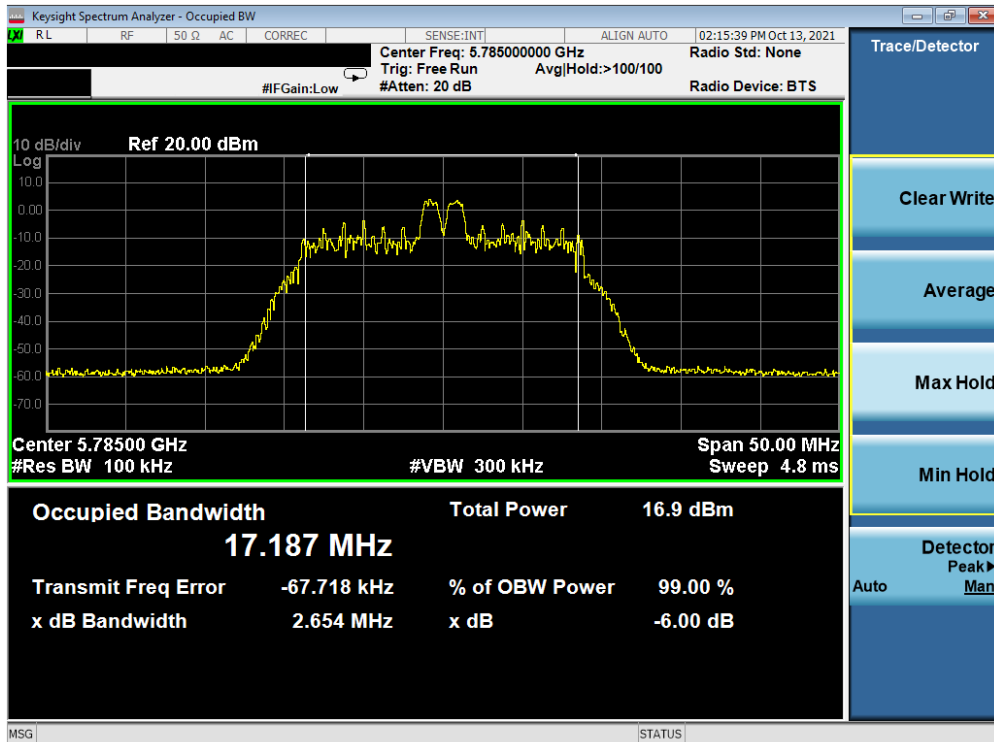


Plot 7-102. 6dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 157)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 73 of 237

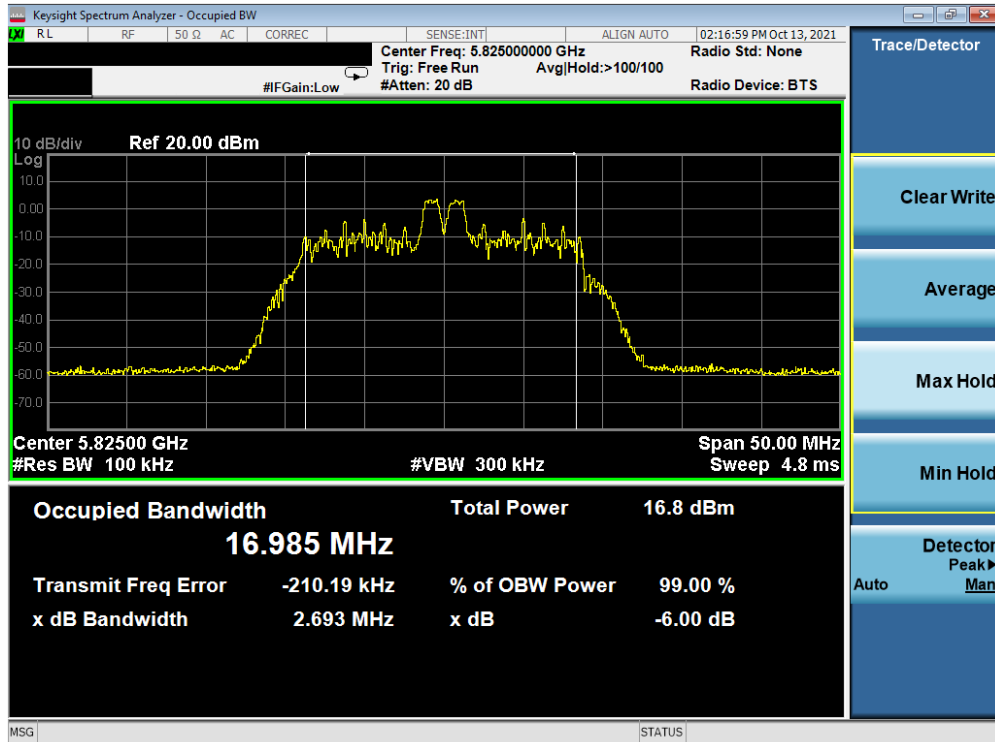


Plot 7-103. 6dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 165)

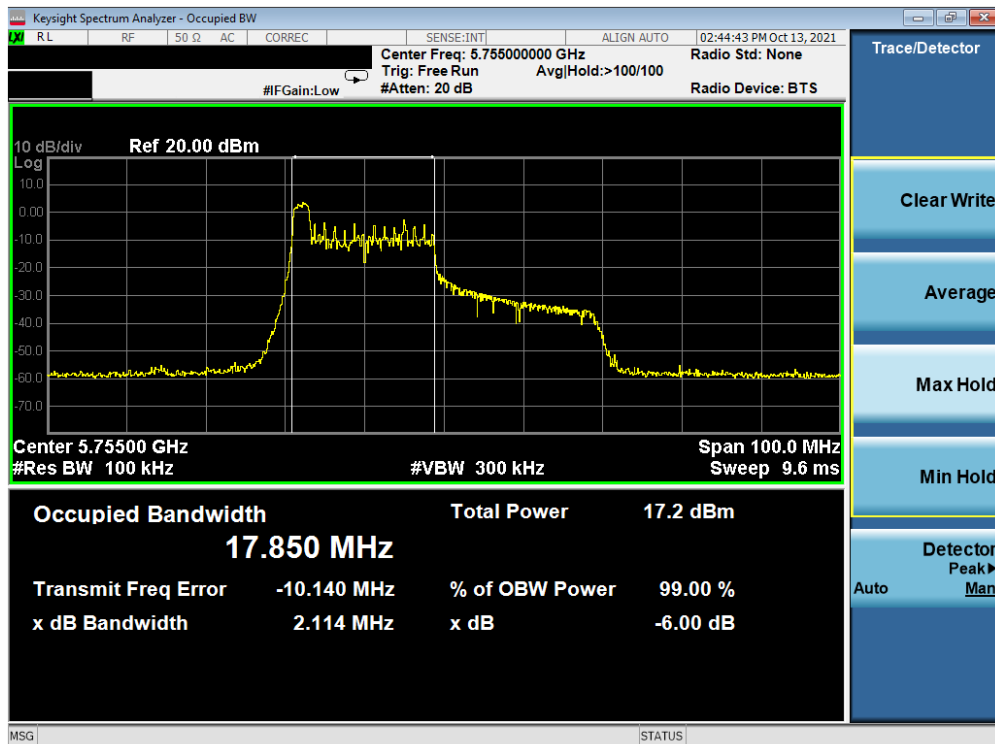


Plot 7-104. 6dB Bandwidth Plot MIMO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 151)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 74 of 237

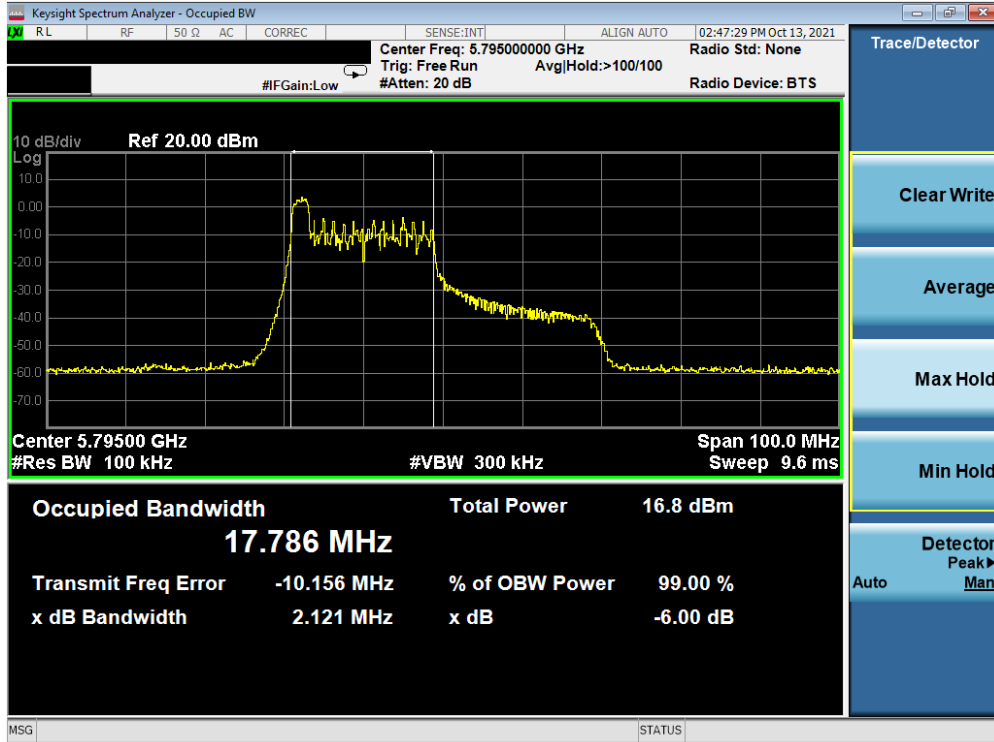

Plot 7-105. 6dB Bandwidth Plot MIMO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 159)

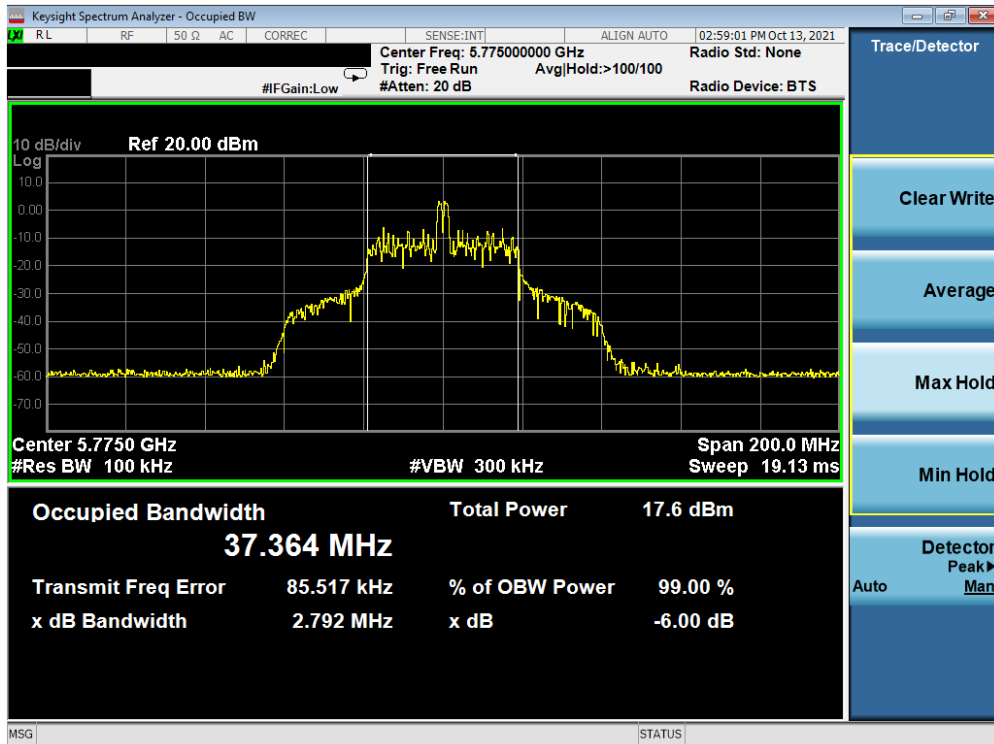


Plot 7-106. 6dB Bandwidth Plot MIMO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 155)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 75 of 237


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3/4	5845	169	ax (20MHz)	26T	MCS0	2.08
Band 4	5865	173	ax (20MHz)	26T	MCS0	2.09
	5885	177	ax (20MHz)	26T	MCS0	2.62
Band 3/4	5835	167	ax (40MHz)	26T	MCS0	2.09
Band 4	5875	175	ax (40MHz)	26T	MCS0	2.13
Band 3/4	5855	171	ax (80MHz)	26T	MCS0	2.26
	5815	163	ax (160MHz L)	26T	MCS0	3.00
	5815	163	ax (160MHz U)	26T	MCS0	2.53

Table 7-7. Conducted Bandwidth Measurements MIMO ANT1 (26 Tones)

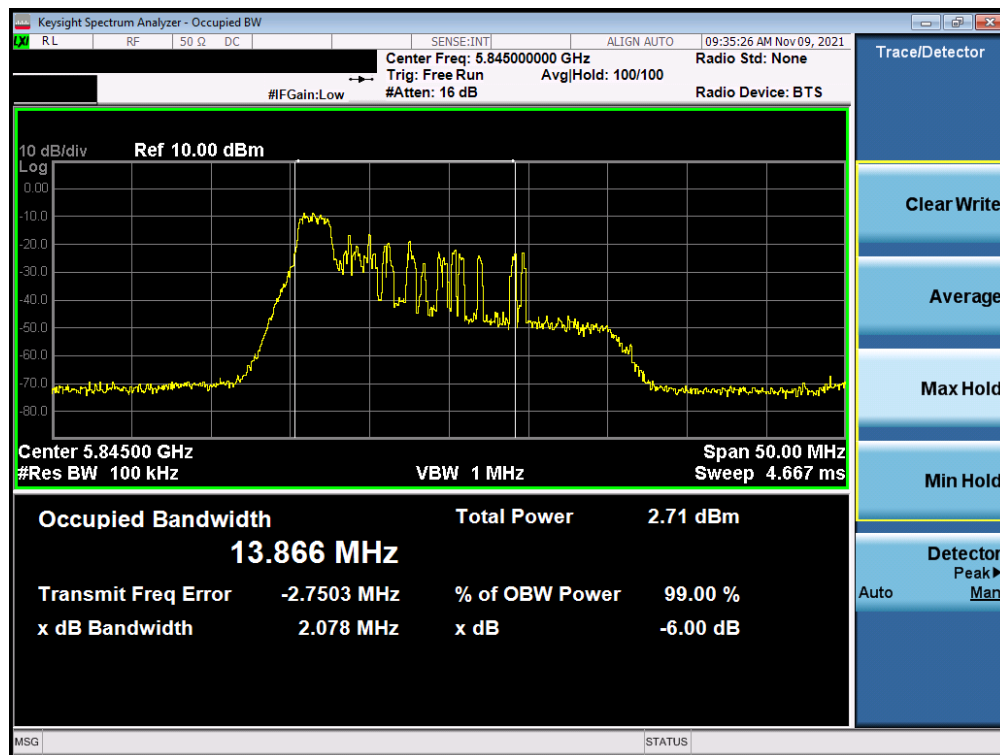


Plot 7-107. 6dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 3/4) – Ch. 169)

FCC ID: A3LSMS906E		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 76 of 237

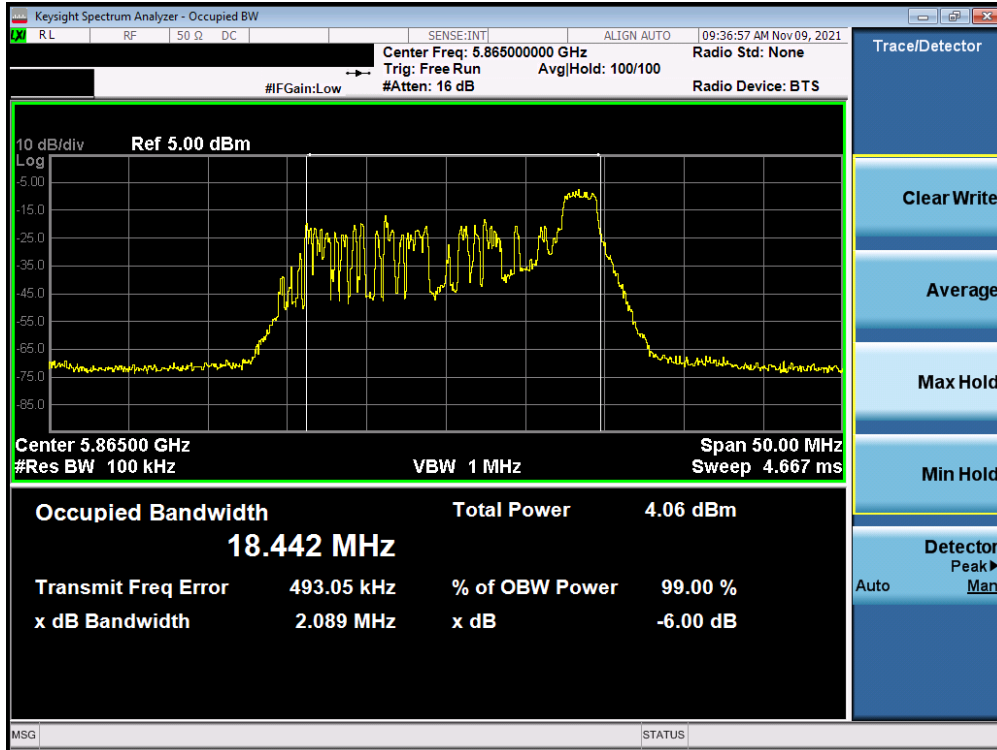

Plot 7-108. 6dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 4) – Ch. 173)

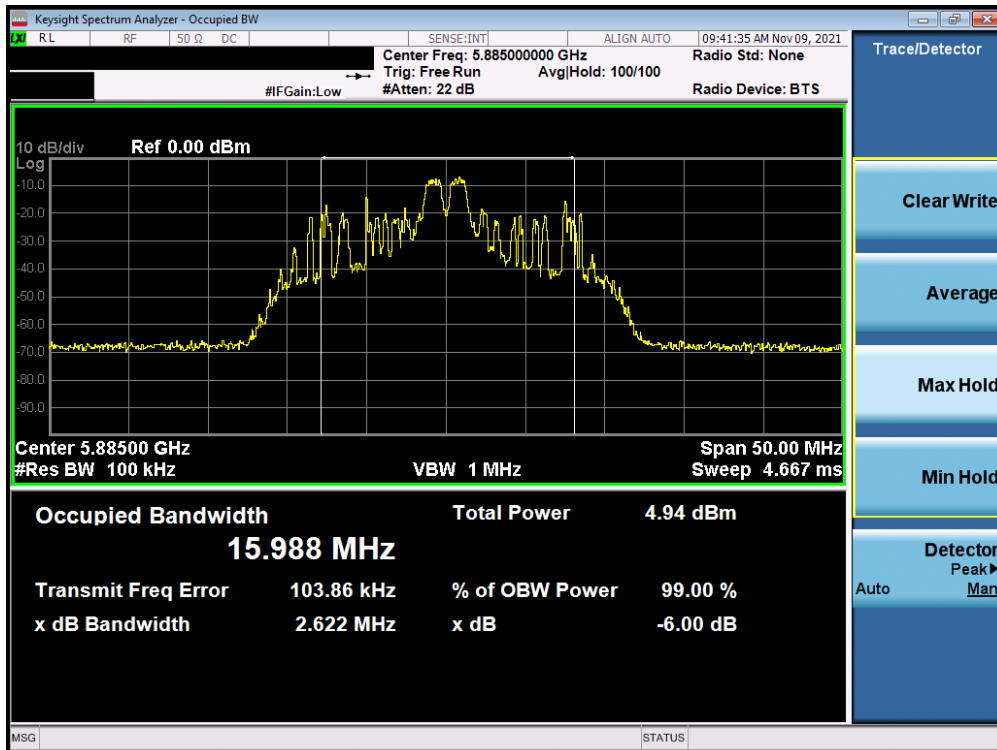

Plot 7-109. 6dB Bandwidth Plot MIMO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 4) – Ch. 177)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2110010116-10.A3L	Test Dates: 09/09 – 12/03/2021	EUT Type: Portable Handset		Page 77 of 237