

**PART 24 C2PC TEST REPORT**

**Applicant Name:**  
 Samsung Electronics Co., Ltd.  
 129, Samsung-ro,  
 Yeongtong-gu, Suwon-si  
 Gyeonggi-do, 16677, Korea


**Date of Testing:**  
 02/01/2022 - 02/28/2022  
**Test Report Issue Date:**  
 03/02/2022  
**Test Site/Location:**  
 PCTEST Lab. Columbia, MD, USA  
**Test Report Serial No.:**  
 1M2202030009-04.A3L

<b>FCC ID:</b>	<b>A3LSMS906E</b>
<b>Applicant Name:</b>	<b>Samsung Electronics Co., Ltd.</b>



**Application Type:** Class II Permissive Change  
**Model:** SM-S906E/DS  
**Additional Model(s):** SM-S906E  
**EUT Type:** Portable Handset  
**FCC Classification:** PCS Licensed Transmitter Held to Ear (PCE)  
**FCC Rule Part:** 24  
**Test Procedure(s):** ANSI C63.26-2015, KDB 648474 D03 v01r04  
**Class II Permissive Change:** Please see FCC change document  
**Original Grant Date:** 01/10/2022

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



  
 Randy Ortanez  
 President




<b>FCC ID:</b> A3LSMS906E		<b>PART 24 MEASUREMENT REPORT</b> Class II Permissive Change		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2202030009-04.A3L	<b>Test Dates:</b> 02/01/2022 - 02/28/2022	<b>EUT Type:</b> Portable Handset	Page 1 of 56	


## TABLE OF CONTENTS

1.0	INTRODUCTION .....	4
1.1	Scope .....	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description .....	5
2.2	Device Capabilities.....	5
2.3	Test Configuration .....	5
2.4	EMI Suppression Device(s)/Modifications .....	5
3.0	DESCRIPTION OF TESTS .....	6
3.1	Evaluation Procedure .....	6
3.2	Radiated Power and Radiated Spurious Emissions .....	6
4.0	MEASUREMENT UNCERTAINTY .....	7
5.0	TEST EQUIPMENT CALIBRATION DATA .....	8
6.0	SAMPLE CALCULATIONS .....	9
7.0	TEST RESULTS.....	10
7.1	Summary.....	10
7.2	Occupied Bandwidth .....	11
7.3	Spurious and Harmonic Emissions at Antenna Terminal .....	18
7.4	Band Edge Emissions at Antenna Terminal .....	24
7.5	Peak-Average Ratio .....	38
7.6	Radiated Power (ERP/EIRP).....	45
7.7	Radiated Spurious Emissions Measurements.....	48
7.8	Frequency Stability / Temperature Variation .....	54
8.0	CONCLUSION.....	56



<b>FCC ID:</b> A3LSMS906E	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>PART 24 MEASUREMENT REPORT</b> <b>Class II Permissive Change</b>	 <b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2202030009-04.A3L	<b>Test Dates:</b> 02/01/2022 - 02/28/2022	<b>EUT Type:</b> Portable Handset	Page 2 of 56



## PART 24 MEASUREMENT REPORT



Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
NR Band n25/2	20 MHz	$\pi/2$ BPSK	1860 - 1905	0.242	23.84	18M0G7D
		QPSK	1860 - 1905	0.248	23.94	19M1G7D
		16QAM	1860 - 1905	0.206	23.13	19M1W7D
	15 MHz	$\pi/2$ BPSK	1857.5 - 1907.5	0.245	23.88	13M6G7D
		QPSK	1857.5 - 1907.5	0.241	23.82	14M2G7D
		16QAM	1857.5 - 1907.5	0.195	22.91	14M2W7D
	10 MHz	$\pi/2$ BPSK	1855 - 1910	0.234	23.69	9M03G7D
		QPSK	1855 - 1910	0.242	23.84	9M39G7D
		16QAM	1855 - 1910	0.203	23.08	9M36W7D
	5 MHz	$\pi/2$ BPSK	1852.5 - 1912.5	0.240	23.79	4M60G7D
		QPSK	1852.5 - 1912.5	0.247	23.92	4M53G7D
		16QAM	1852.5 - 1912.5	0.204	23.10	4M58W7D

FCC ID: A3LSMS906E	 <b>PART 24 MEASUREMENT REPORT</b> <b>Class II Permissive Change</b>			Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset	Page 3 of 56	

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.



### 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

### 1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: A3LSMS906E	 <b>PART 24 MEASUREMENT REPORT</b> <b>Class II Permissive Change</b> 		Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset	Page 4 of 56

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMS906E**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 24.

**Test Device Serial No.:** 1509M, 1510M, 1489M

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (FR1), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer, Ultra Wideband



### 2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 3.2 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMS906E	 PCTEST® Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change		Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset	Page 5 of 56	

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

**Deviation from Measurement Procedure.....None**

### 3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI/TIA-603-E-2016. A half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [dBm] = P_g [dBm] - \text{cable loss} [dB] + \text{antenna gain} [dBd/dBi];$$

where  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g [dBm] - \text{cable loss} [dB]$ .

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:



$$E_{[dB\mu V/m]} = \text{Measured amplitude level}_{[dBm]} + 107 + \text{Cable Loss}_{[dB]} + \text{Antenna Factor}_{[dB/m]}$$

And

$$\text{EIRP}_{[dBm]} = E_{[dB\mu V/m]} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.



Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

FCC ID: A3LSMS906E	 <small>Proud to be part of element</small>	<b>PART 24 MEASUREMENT REPORT</b> <b>Class II Permissive Change</b>	 <b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2202030009-04.A3L	<b>Test Dates:</b> 02/01/2022 - 02/28/2022	<b>EUT Type:</b> Portable Handset	Page 6 of 56

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMS906E	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change		Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 7 of 56

## 5.0 TEST EQUIPMENT CALIBRATION DATA



Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AP2	EMC Cable and Switch System	3/4/2021	Annual	3/4/2022	AP2
-	ETS	EMC Cable and Switch System	3/4/2021	Annual	3/4/2022	ETS
-	LTx1	Licensed Transmitter Cable Set	3/12/2021	Annual	3/12/2022	LTx1
-	LTx2	Licensed Transmitter Cable Set	3/12/2021	Annual	3/12/2022	LTx2
Emco	3115	Horn Antenna (1-18GHz)	6/18/2020	Biennial	6/18/2022	9704-5182
Keysight Technologies	N9030A	PXA Signal Analyzer	1/6/2022	Annual	1/6/2023	MY55410501
Keysight Technologies	N9038A	MXE EMI Receiver	1/21/2022	Annual	1/21/2023	MY51210133
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	8/3/2021	Annual	8/3/2022	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	5/25/2021	Annual	5/25/2022	100348

**Table 5-1. Test Equipment**

### Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMS906E	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change		Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset	Page 8 of 56	



## 6.0 SAMPLE CALCULATIONS

### QPSK Modulation

#### Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

### QAM Modulation

#### Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated



7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

### Spurious Radiated Emission

#### Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was  $-81.0$  dBm. The gain of the substituted antenna is  $8.1$  dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0$  dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is  $2.0$  dB at  $3700.40$  MHz. So  $6.1$  dB is added to the signal generator reading of  $-30.9$  dBm yielding  $-24.80$  dBm. The fundamental EIRP was  $25.50$  dBm so this harmonic was  $25.50$  dBm  $- (-24.80) = 50.3$  dBc.

FCC ID: A3LSMS906E	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change		Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 9 of 56

## 7.0 TEST RESULTS

### 7.1 Summary



Company Name: Samsung Electronics Co., Ltd.  
 FCC ID: A3LSMS906E  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 Mode(s): NR

Test Condition	Test Description	FCC Part Section(s)	RSS Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Transmitter Conducted Output Power*	2.1046(a), 2.1046(c)	RSS-Gen(6.12)	N/A	PASS	See RF Exposure Report
	Occupied Bandwidth	2.1049(h)	RSS-Gen(6.7)	N/A	PASS	Section 7.2
	Conducted Band Edge / Spurious Emissions	2.1051, 24.238(a)	RSS-Gen(6.13), RSS-133(6.5)	> 43 + 10log <sub>10</sub> (P[Watts]) at Band Edge and for all out-of-band emissions	PASS	Sections 7.3, 7.4
	Peak-to-Average Ratio	24.232(d)	RSS-133(6.4)	≤ 13 dB	PASS	Section 7.5
	Frequency Stability	2.1055, 24.235	RSS-Gen(6.11), RSS-133(6.3)	Fundamental emissions stay within authorized frequency block **Carrier frequency shall not depart from the reference frequency in excess of ±2.5 ppm	PASS	Section 7.8
RADIATED	Equivalent Isotropic Radiated Power	24.232(c)	RSS-Gen(6.12), RSS-133(6.4)	< 2 Watts max. EIRP	PASS	Section 7.6
	Radiated Spurious Emissions	2.1053, 24.238(a)	RSS-Gen(6.13), RSS-133(6.5)	≥ 43 + 10 log (P[Watts]) dB of attenuation below transmitter power **Spurious emissions from receivers shall not exceed the limits detailed in RSS-Gen(7.3)	PASS	Section 7.7

**Table 7-1. Summary of Test Results**

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST EMC Software Tool v1.0.

FCC ID: A3LSMS906E		PART 24 MEASUREMENT REPORT Class II Permissive Change		Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 10 of 56

## 7.2 Occupied Bandwidth

### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 4.2

### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

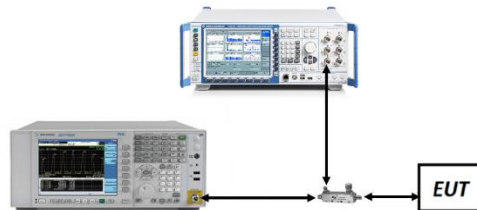


**Figure 7-1. Test Instrument & Measurement Setup**

### Test Notes


None.

FCC ID: A3LSMS906E	<b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b> Class II Permissive Change	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 11 of 56

### NR Band n25/2

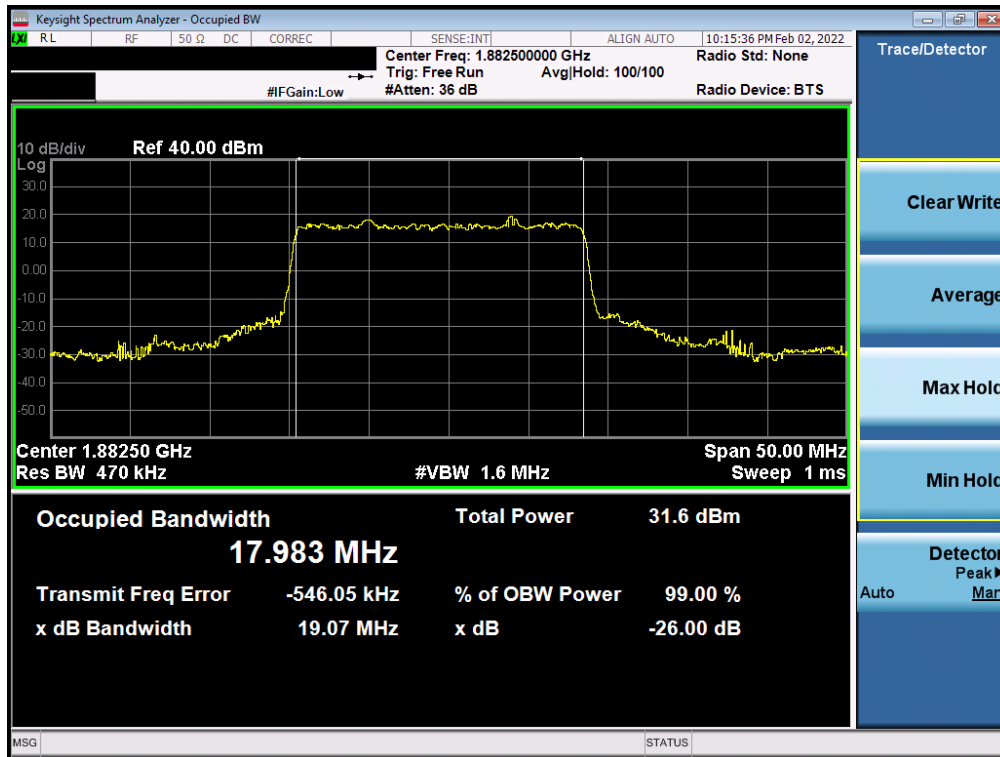


Plot 7-1. Occupied Bandwidth Plot (NR Band n25/2 - 20.0MHz DFT-s-OFDM BPSK - Full RB)

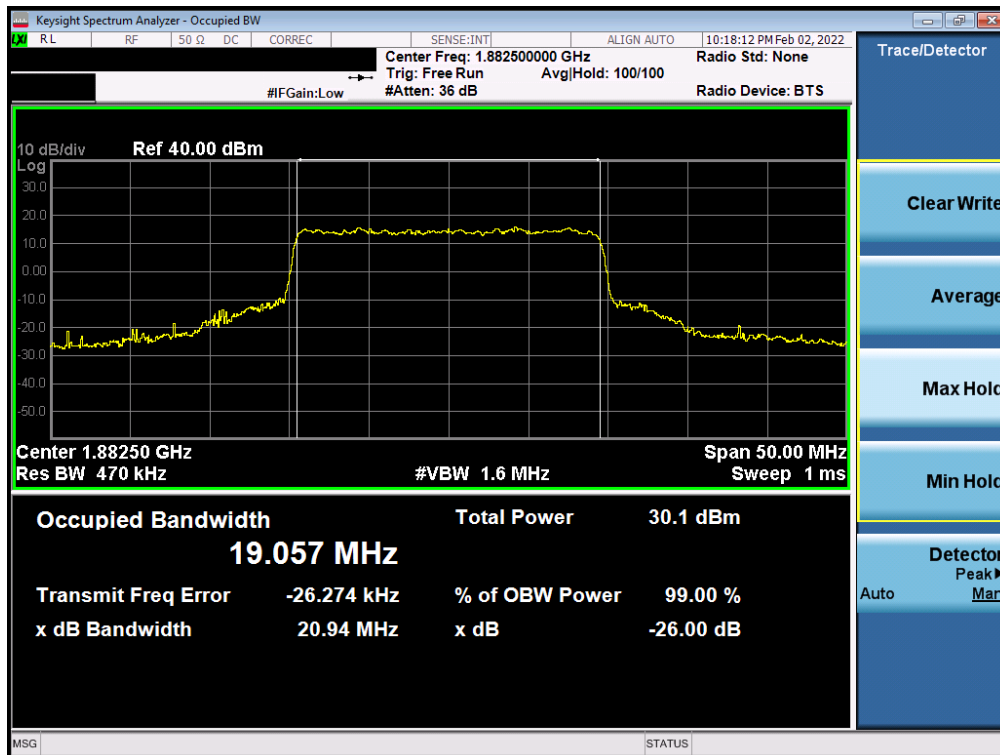


Plot 7-2. Occupied Bandwidth Plot (NR Band n25/2 - 20.0MHz CP-OFDM QPSK - Full RB)

FCC ID: A3LSMS906E	<b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b> Class II Permissive Change	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 12 of 56

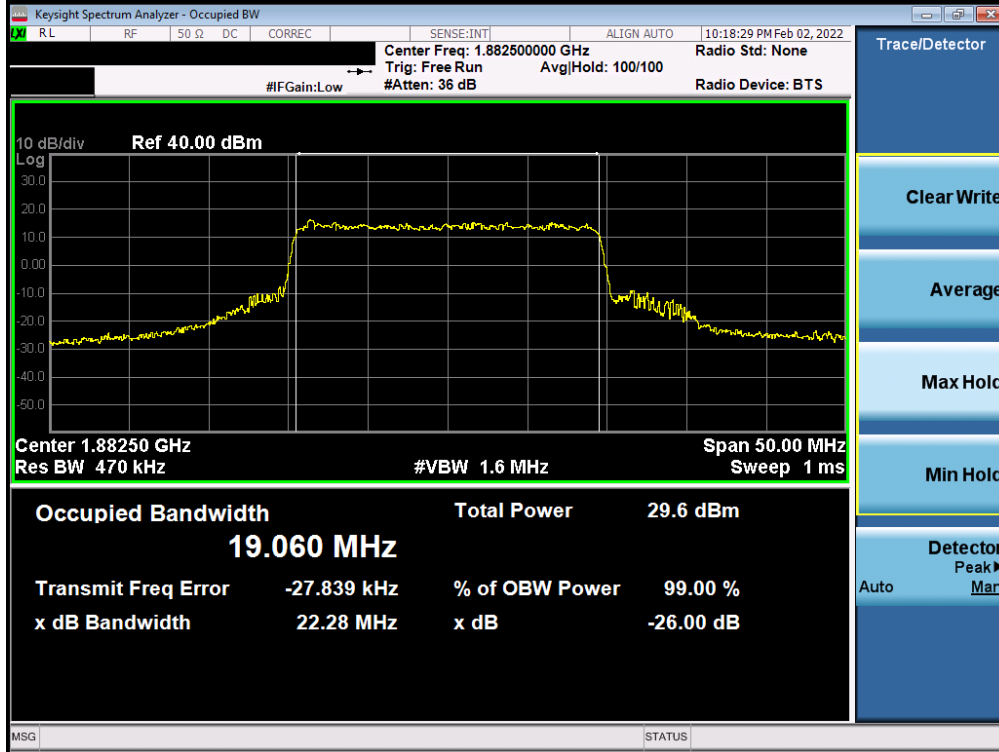


Plot 7-3. Occupied Bandwidth Plot (NR Band n25/2 - 20.0MHz CP-OFDM 16QAM - Full RB)

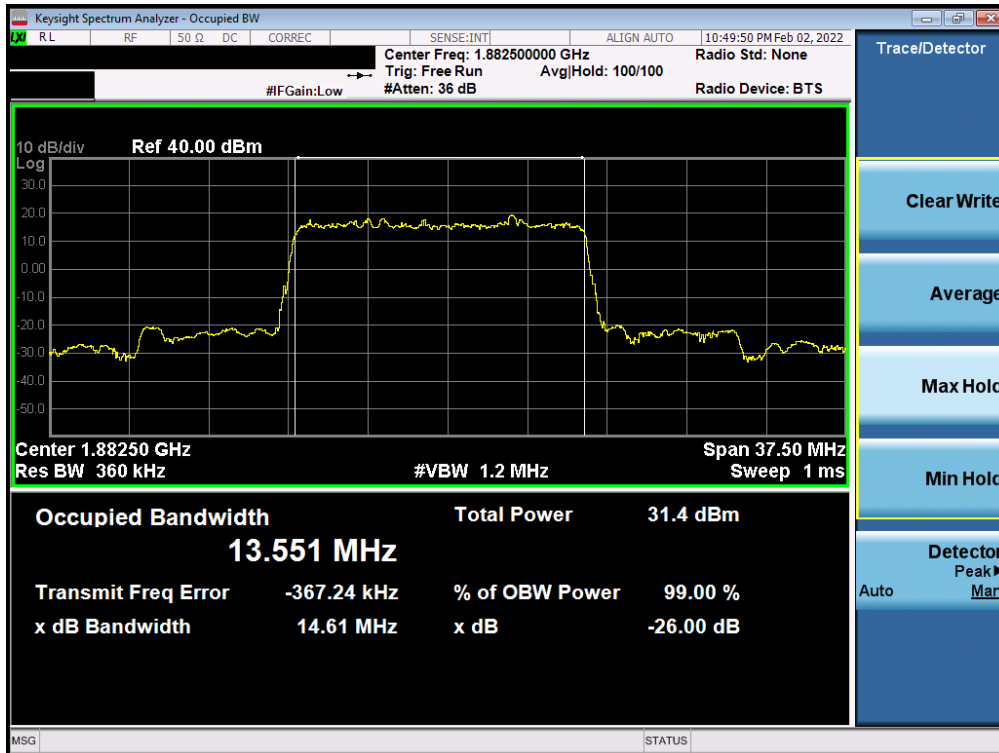


Plot 7-4. Occupied Bandwidth Plot (NR Band n25/2 - 15.0MHz DFT-s-OFDM BPSK - Full RB)

FCC ID: A3LSMS906E	<b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b> Class II Permissive Change	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 13 of 56

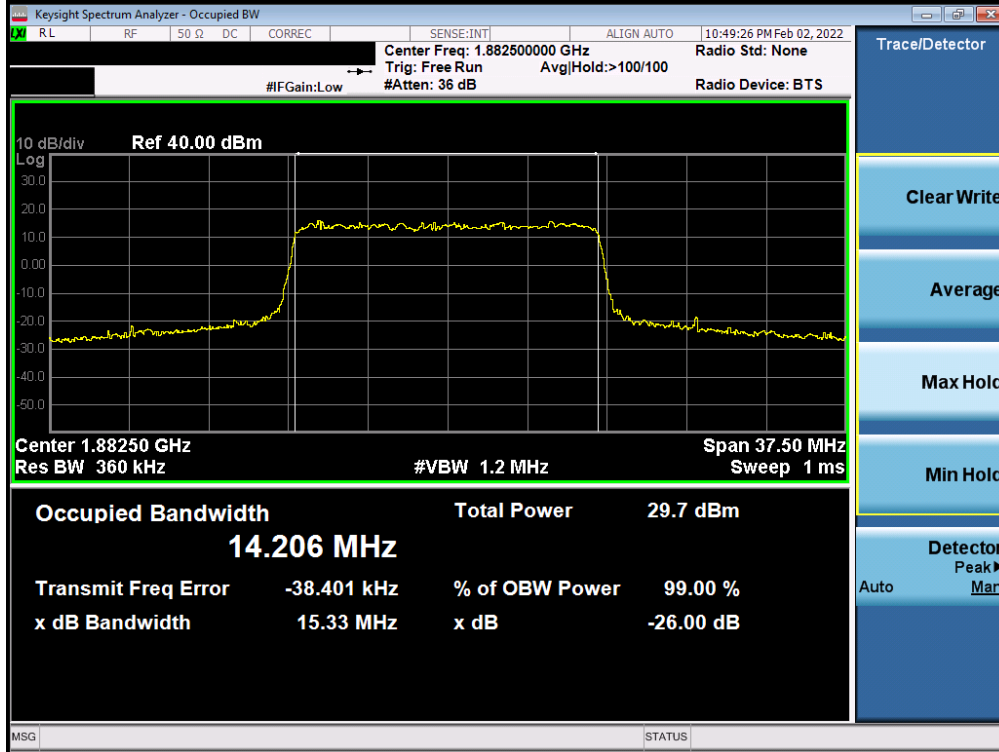


Plot 7-5. Occupied Bandwidth Plot (NR Band n25/2 - 15.0MHz CP-OFDM QPSK - Full RB)

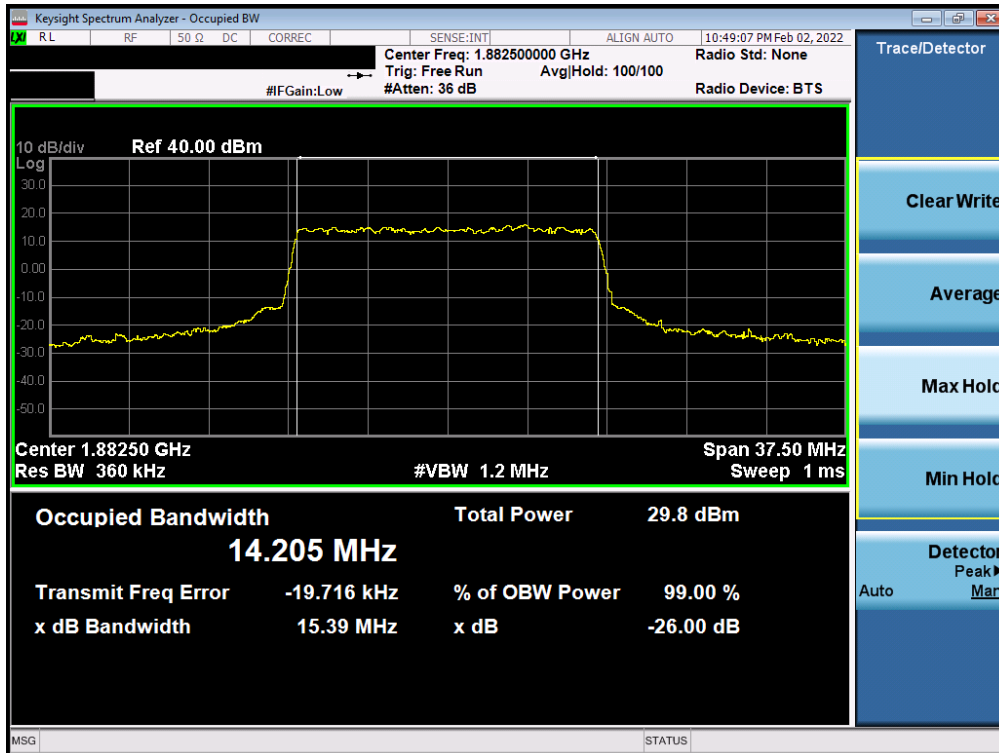


Plot 7-6. Occupied Bandwidth Plot (NR Band n25/2 - 15.0MHz CP-OFDM 16QAM - Full RB)

FCC ID: A3LSMS906E	<b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b> Class II Permissive Change	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 14 of 56

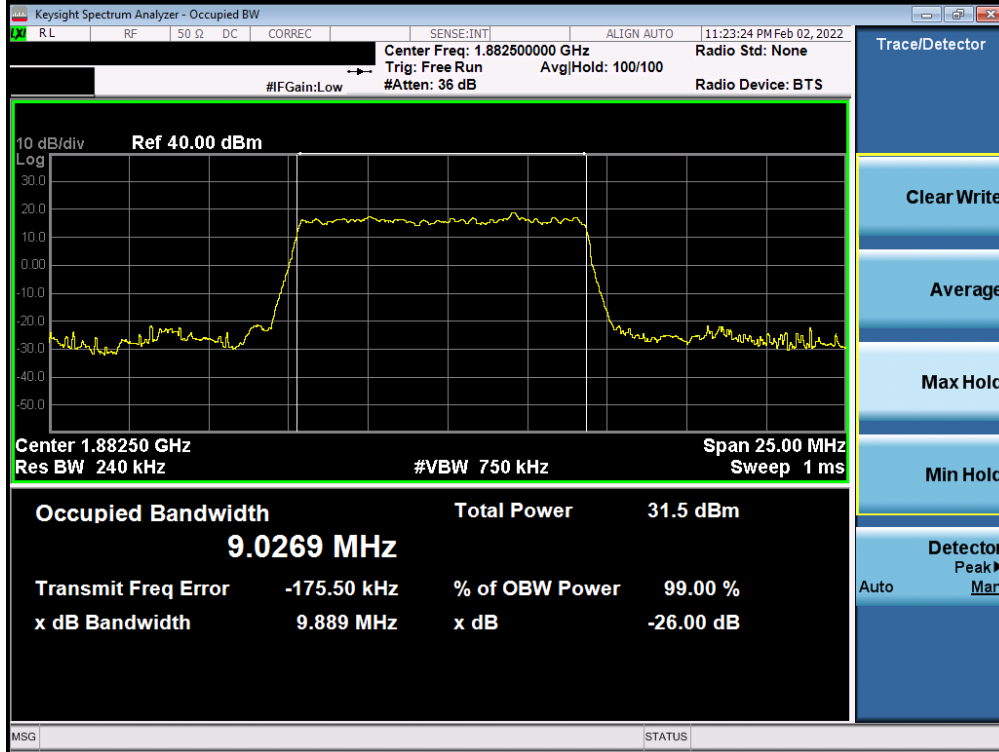


Plot 7-7. Occupied Bandwidth Plot (NR Band n25/2 - 10.0MHz DFT-s-OFDM BPSK - Full RB)

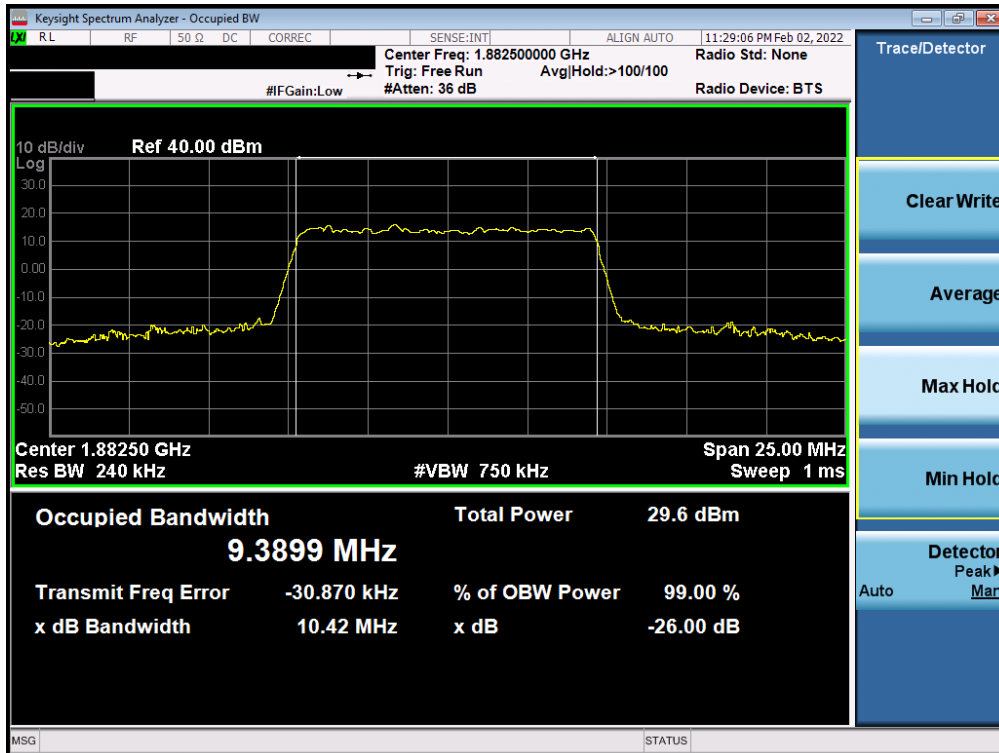


Plot 7-8. Occupied Bandwidth Plot (NR Band n25/2 - 10.0MHz CP-OFDM QPSK - Full RB)

FCC ID: A3LSMS906E	<b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b> Class II Permissive Change	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 15 of 56

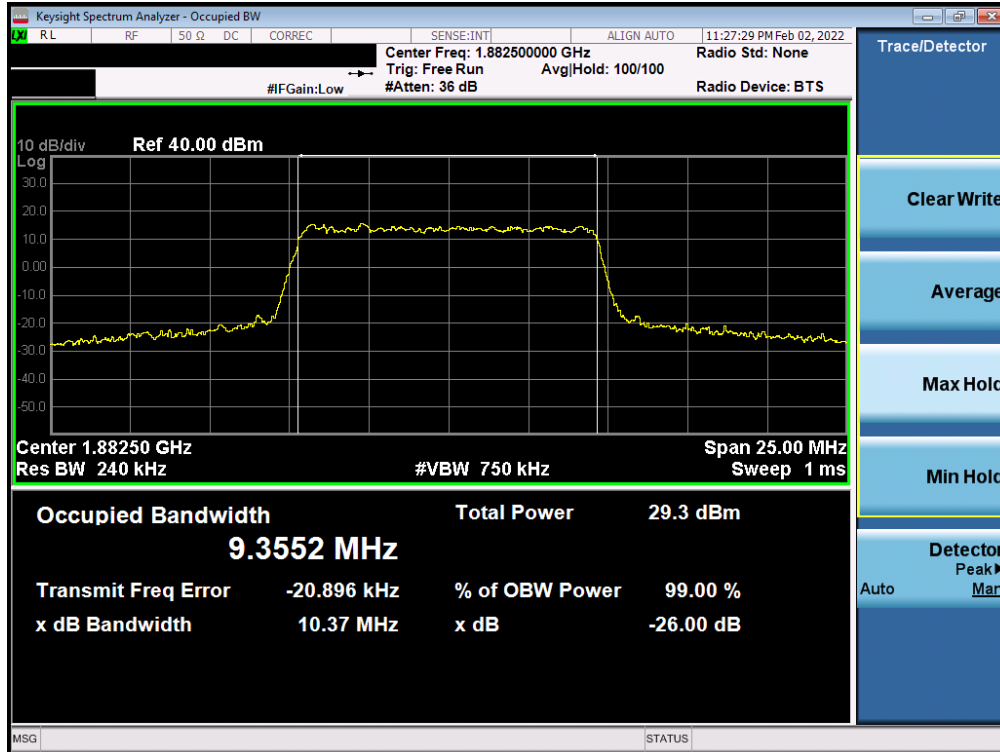


Plot 7-9. Occupied Bandwidth Plot (NR Band n25/2 - 10.0MHz CP-OFDM 16QAM - Full RB)

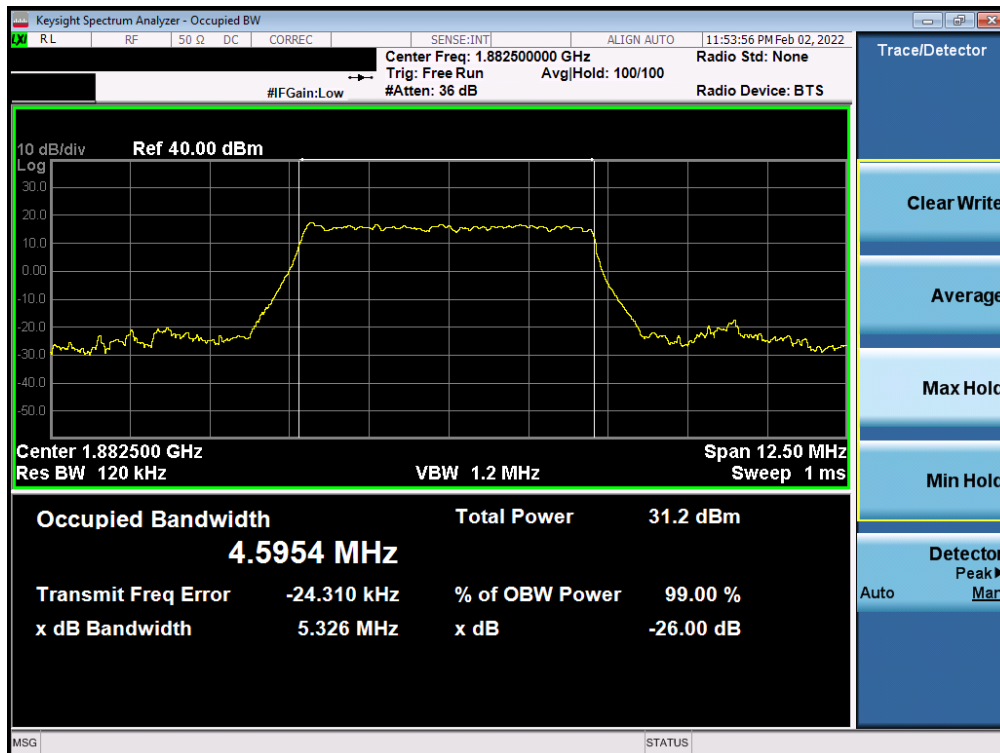


Plot 7-10. Occupied Bandwidth Plot (NR Band n25/2 - 5.0MHz DFT-s-OFDM BPSK - Full RB)

FCC ID: A3LSMS906E	<b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b> Class II Permissive Change	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 16 of 56



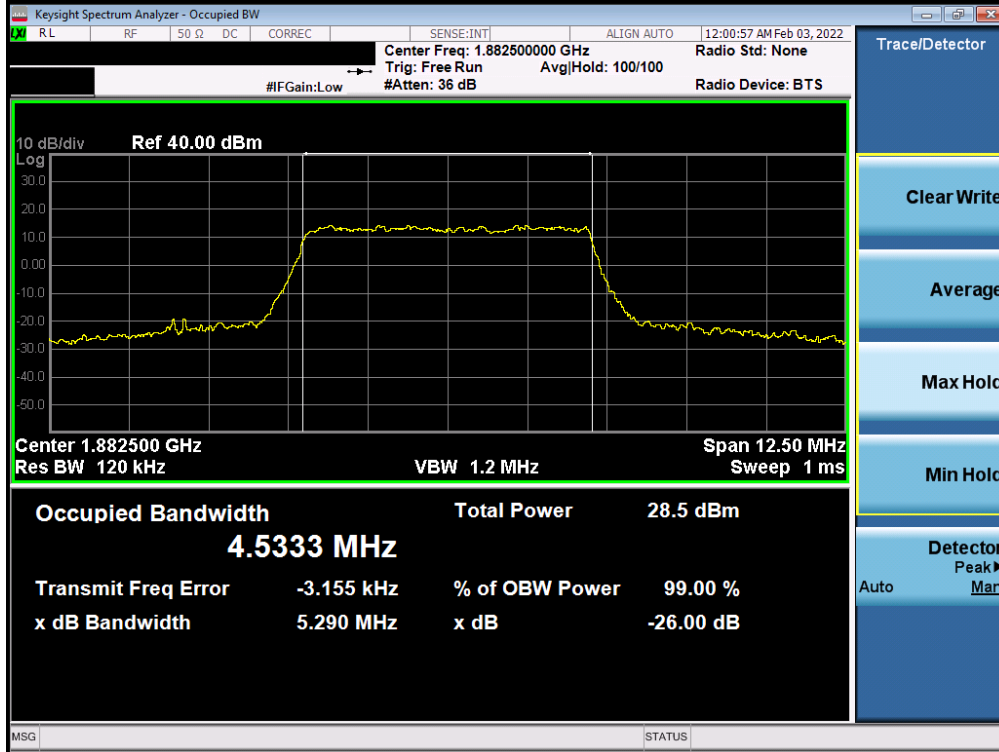

Plot 7-11. Occupied Bandwidth Plot (NR Band n25/2 - 5.0MHz CP-OFDM QPSK - Full RB)

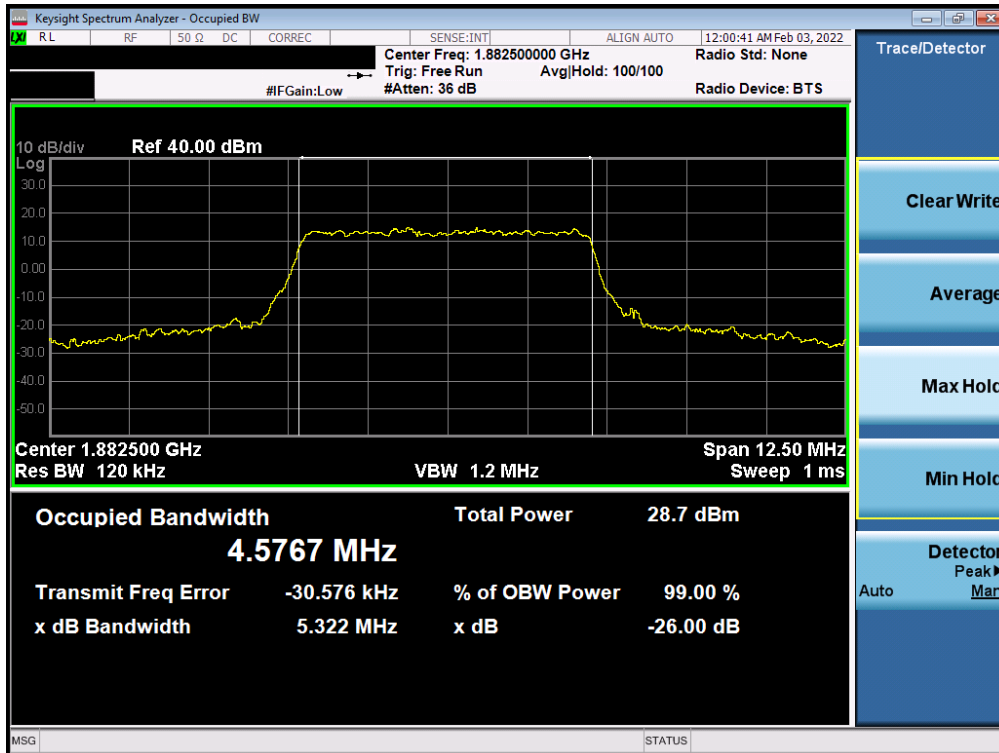

Plot 7-12. Occupied Bandwidth Plot (NR Band n25/2 - 5.0MHz CP-OFDM 16QAM - Full RB)

FCC ID: A3LSMS906E	<b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b> Class II Permissive Change	<b>Approved by:</b> Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset	Page 17 of 56

## 7.3 Spurious and Harmonic Emissions at Antenna Terminal

### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The minimum permissible attenuation level of any spurious emission is  $43 + 10 \log_{10}(P_{[Watts]})$ , where  $P$  is the transmitter power in Watts.***

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 6.0

### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 20GHz (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

### Test Setup

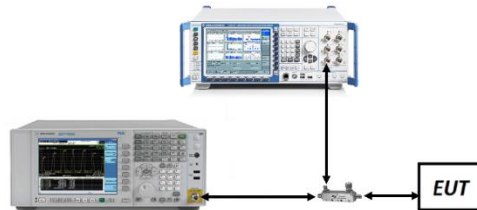

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 7-2. Test Instrument & Measurement Setup**

### Test Notes


1. Per Part 24 and RSS-133, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth 100 kHz or greater for measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
2. For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

FCC ID: A3LSMS906E	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change		Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 18 of 56

### NR Band n25/2

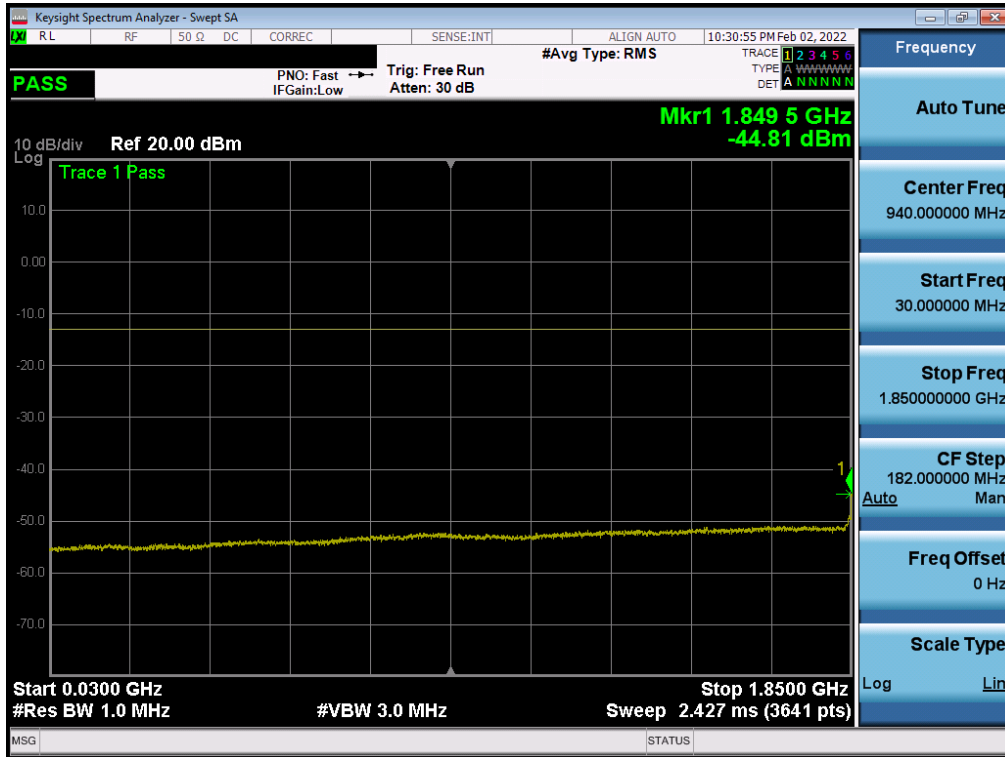


Plot 7-13. Conducted Spurious Plot (NR Band n25/2 -20.0MHz - 1RB - Low Channel)

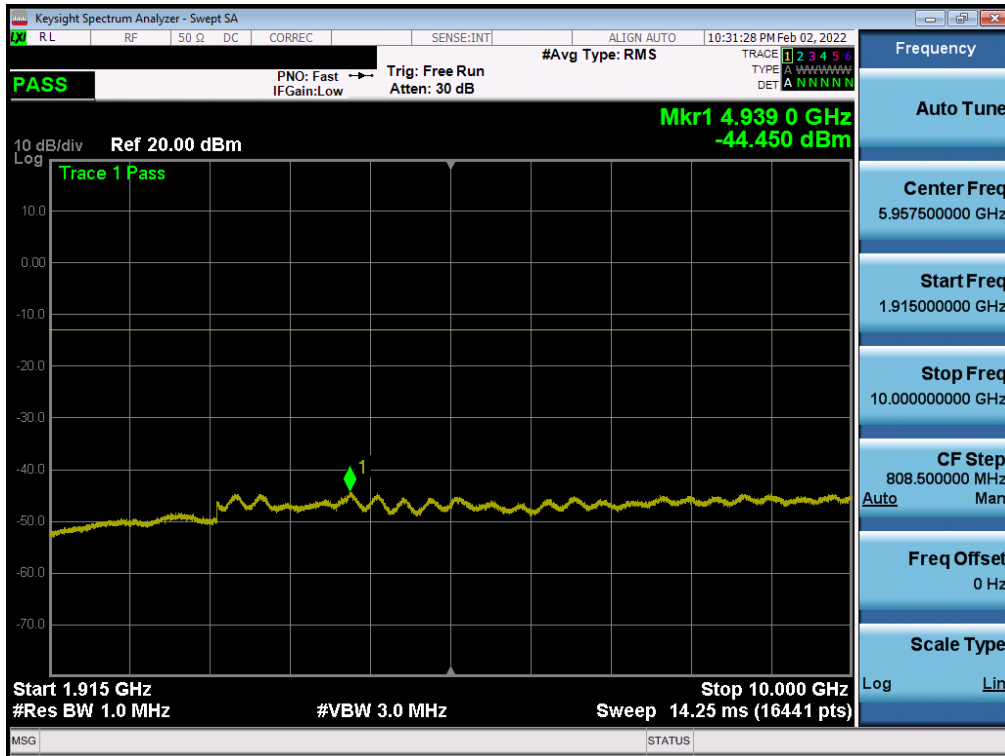


Plot 7-14. Conducted Spurious Plot (NR Band n25/2 - 20.0MHz - 1RB - Low Channel)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 19 of 56

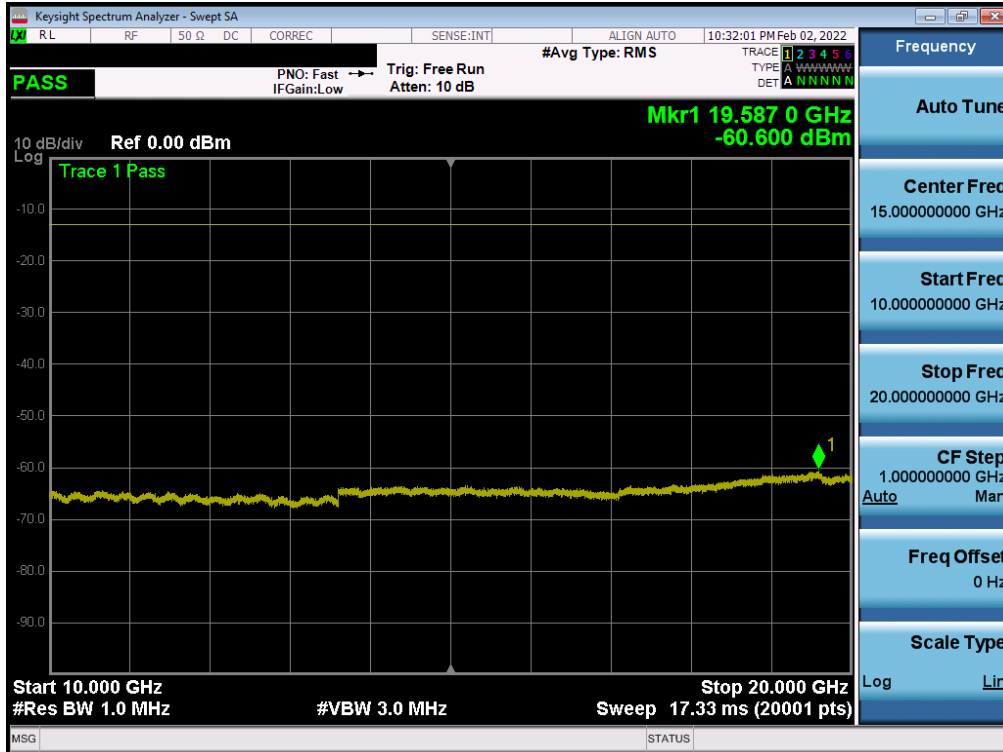


Plot 7-15. Conducted Spurious Plot (NR Band n25/2 - 20.0MHz - 1RB - Low Channel)

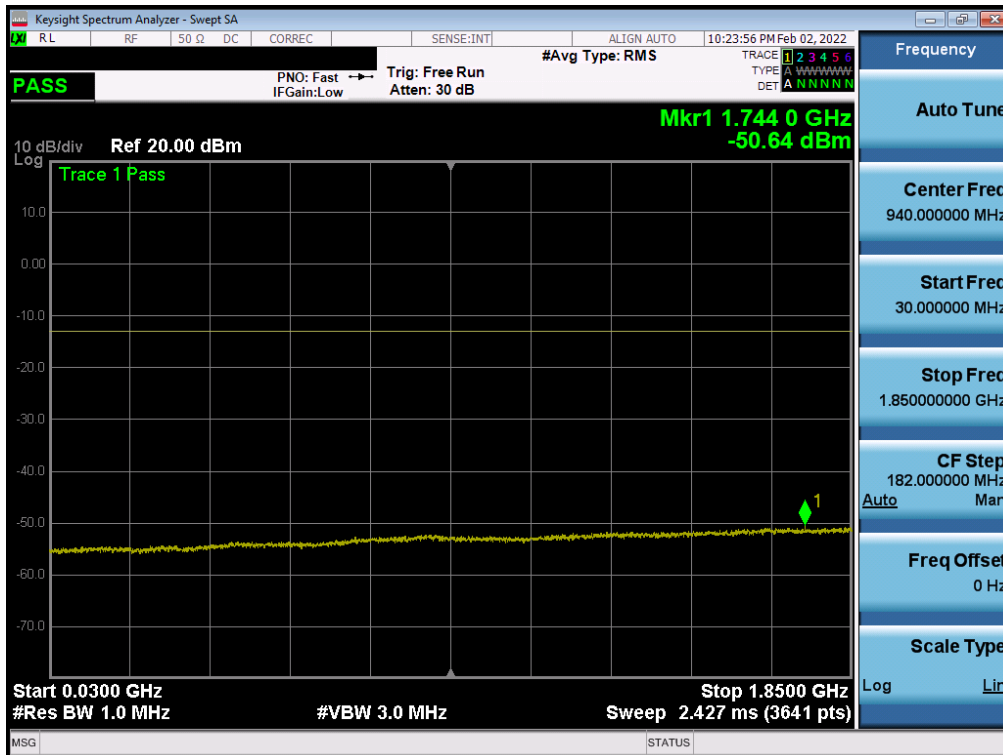


Plot 7-16. Conducted Spurious Plot (NR Band n25/2 - 20.0MHz - 1RB - Mid Channel)

FCC ID: A3LSMS906E	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 20 of 56

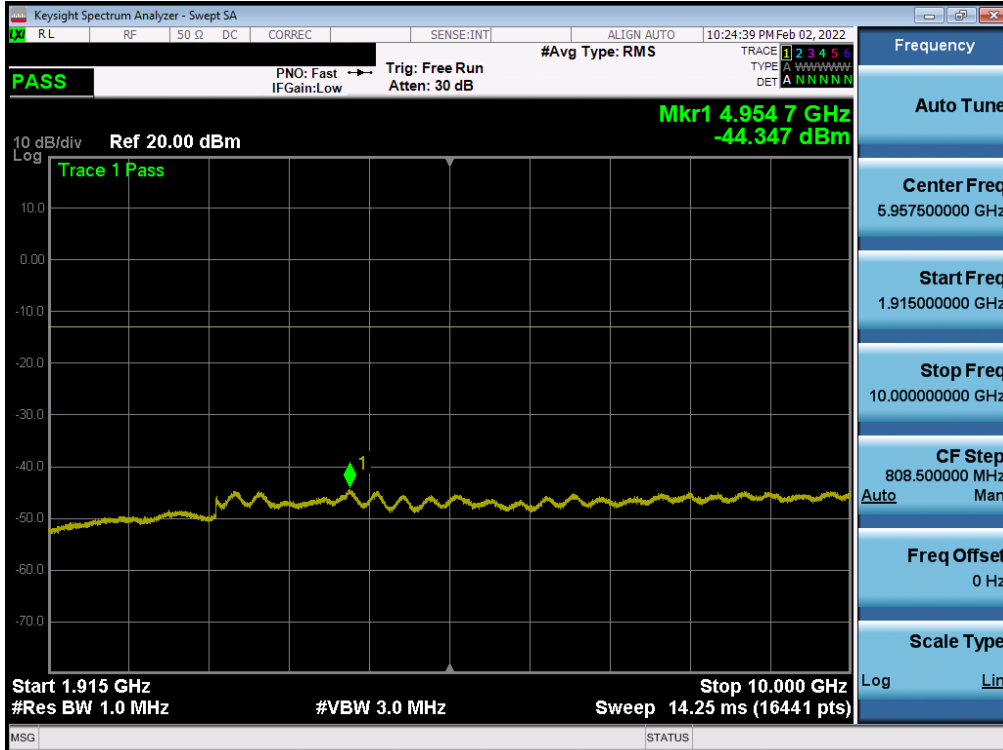


Plot 7-17. Conducted Spurious Plot (NR Band n25/2 - 20.0MHz - 1RB - Mid Channel)

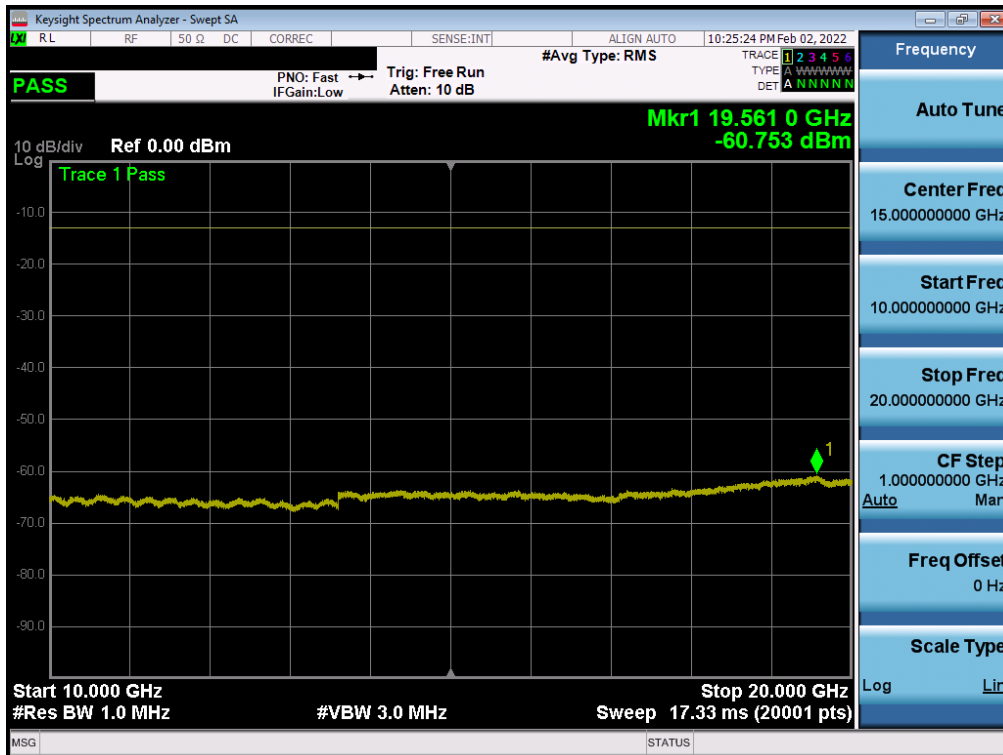


Plot 7-18. Conducted Spurious Plot (NR Band n25/2 - 20.0MHz - 1RB - Mid Channel)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 21 of 56

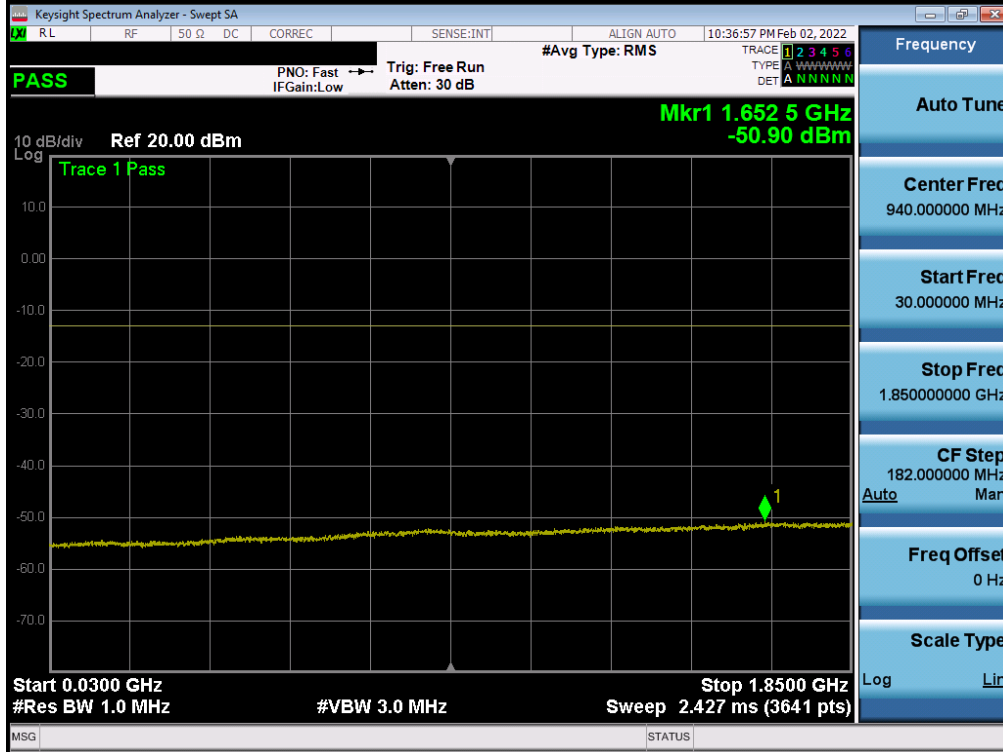


Plot 7-19. Conducted Spurious Plot (NR Band n25/2 - 20.0MHz - 1RB - High Channel)

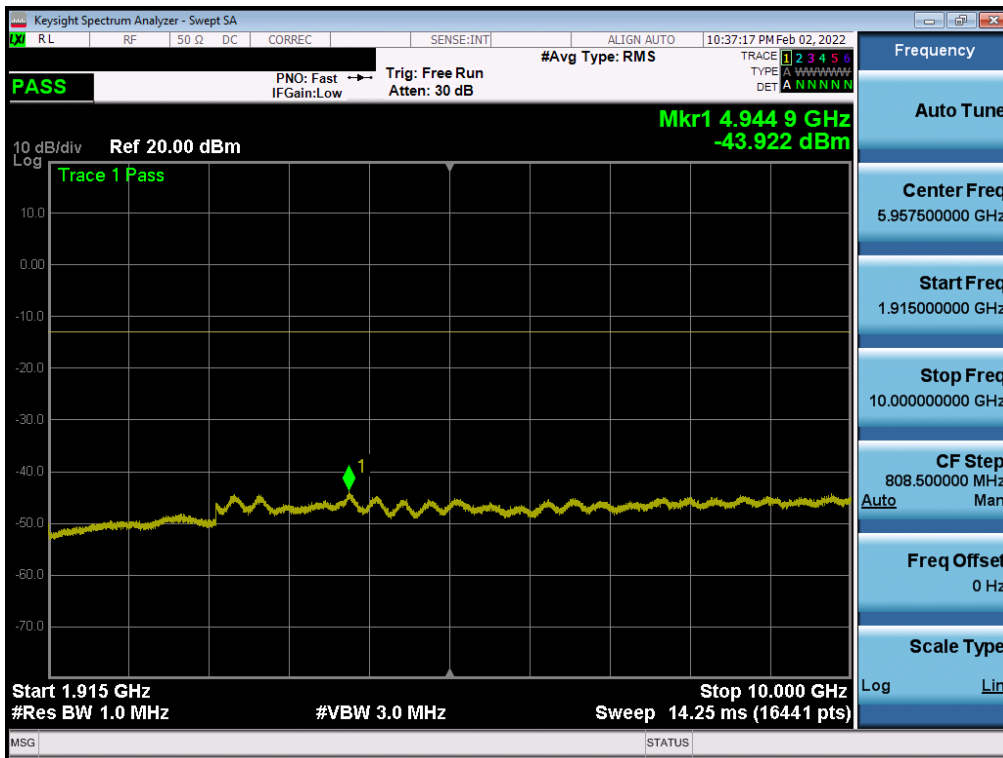

Plot 7-20. Conducted Spurious Plot (NR Band n25/2 - 20.0MHz - 1RB - High Channel)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 22 of 56

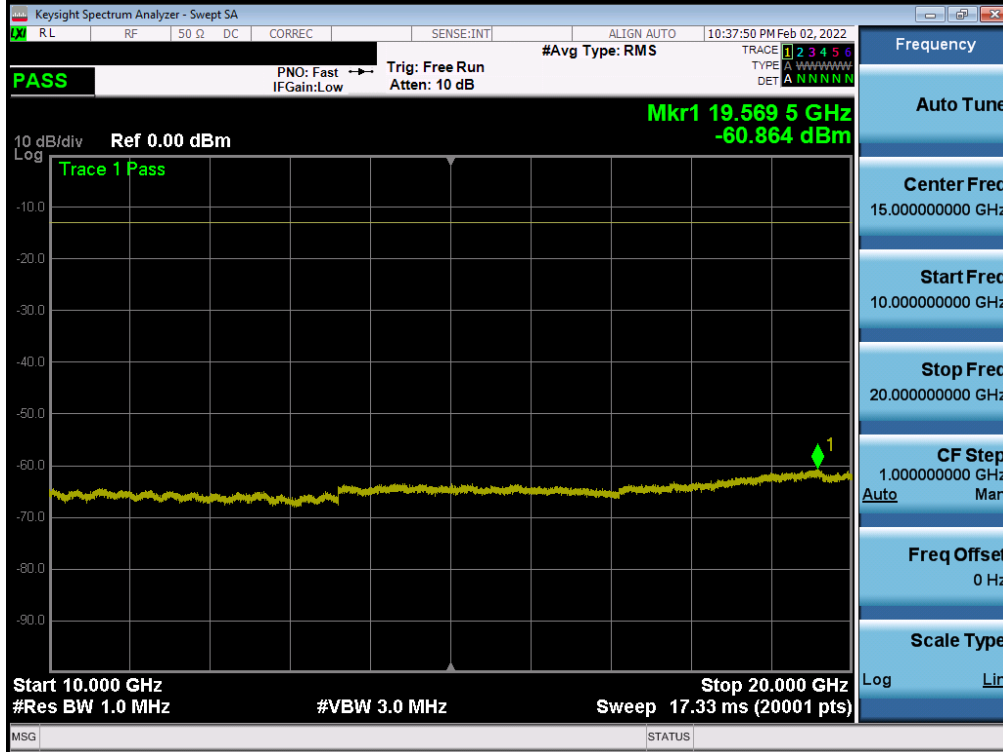

Plot 7-21. Conducted Spurious Plot (NR Band n25/2 - 20.0MHz - 1RB - High Channel)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change		Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 23 of 56

## 7.4 Band Edge Emissions at Antenna Terminal

### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The minimum permissible attenuation level of any spurious emission is  $43 + 10 \log_{10}(P_{[Watts]})$ , where  $P$  is the transmitter power in Watts.***

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 6.0

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW  $\geq$  1% of the emission bandwidth
4. VBW  $\geq$  3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq$  2 x Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

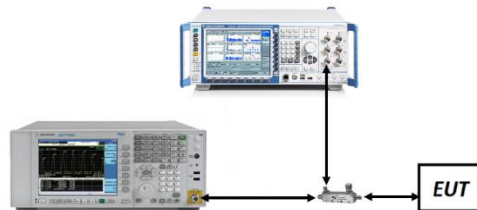



**Figure 7-3. Test Instrument & Measurement Setup**

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 24 of 56




## Test Notes

1. Per 24.238(b) and RSS-133(6.5), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
2. For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

FCC ID: A3LSMS906E	 <b>PART 24 MEASUREMENT REPORT</b> <b>Class II Permissive Change</b> 		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2202030009-04.A3L	<b>Test Dates:</b> 02/01/2022 - 02/28/2022	<b>EUT Type:</b> Portable Handset	Page 25 of 56

## NR Band n25/2

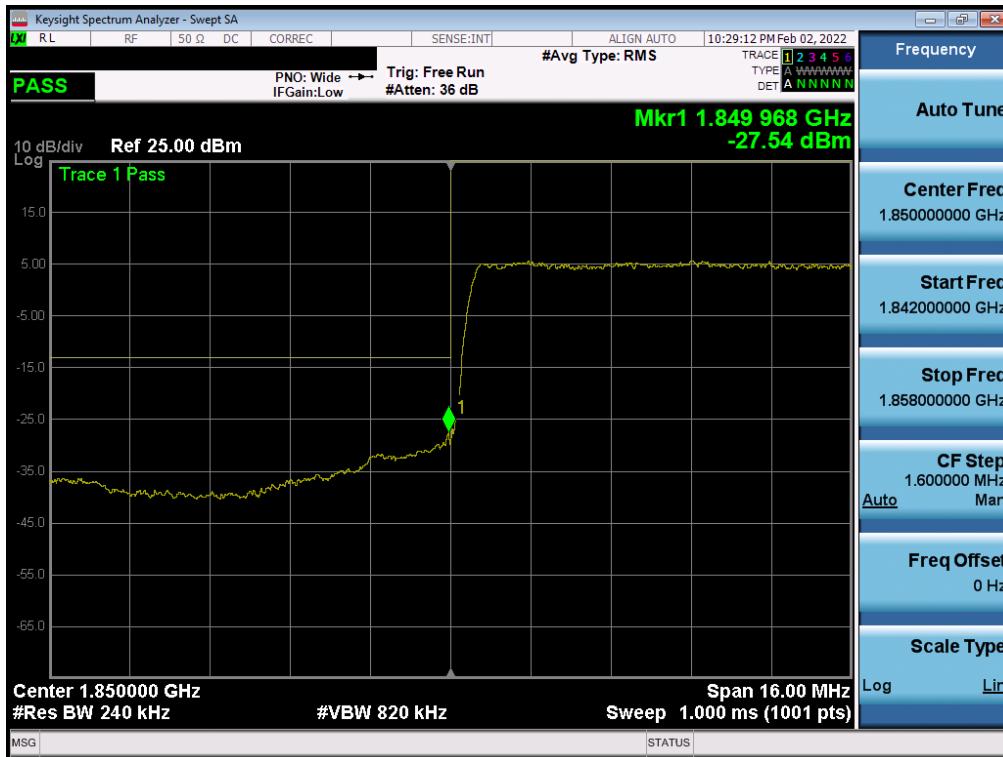

Plot 7-22. Lower Band Edge Plot (NR Band n25/2 - 20MHz QPSK – Full RB)




Plot 7-23. Extended Lower Band Edge Plot (NR Band n25/2 - 20MHz QPSK – Full RB)

FCC ID: A3LSMS906E	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 26 of 56



Plot 7-24. Upper Band Edge Plot (NR Band n2 - 20MHz QPSK – Full RB)

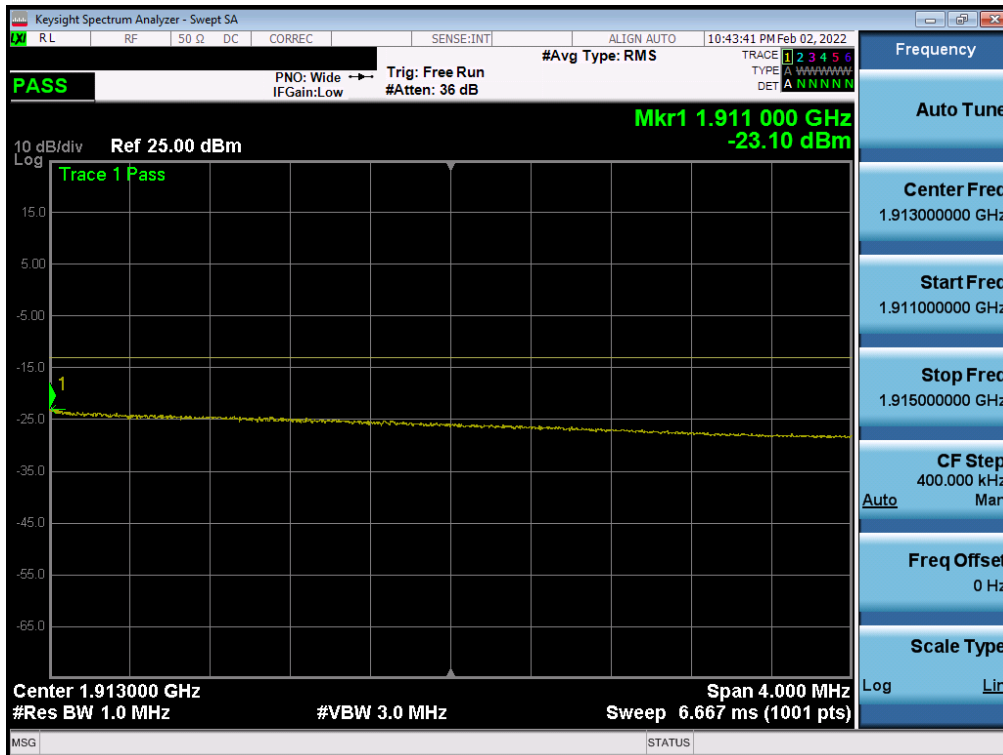

Plot 7-25. Extended Upper Band Edge Plot (NR Band n2 - 20MHz QPSK – Full RB)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 27 of 56




Plot 7-26. Upper Band Edge Plot (NR Band n25 - 20MHz QPSK – Full RB)




Plot 7-27. Extended Upper Band Edge Plot (NR Band n25 - 20MHz QPSK – Full RB)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 28 of 56

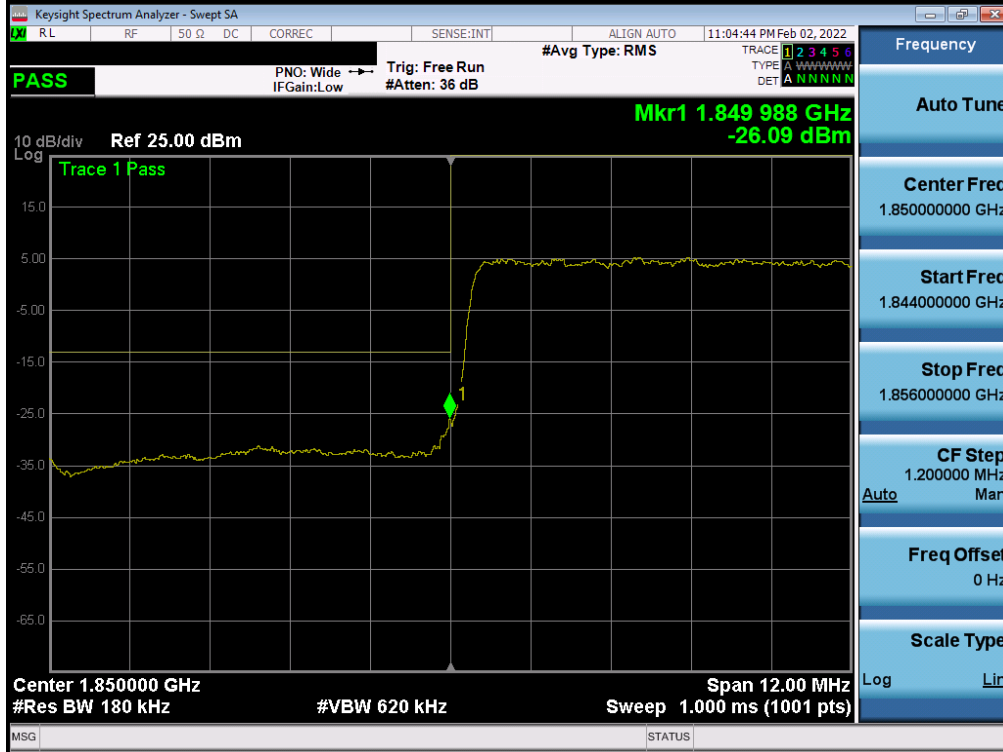


Plot 7-28. Lower Band Edge Plot (NR Band n25/2 - 15MHz QPSK – Full RB)

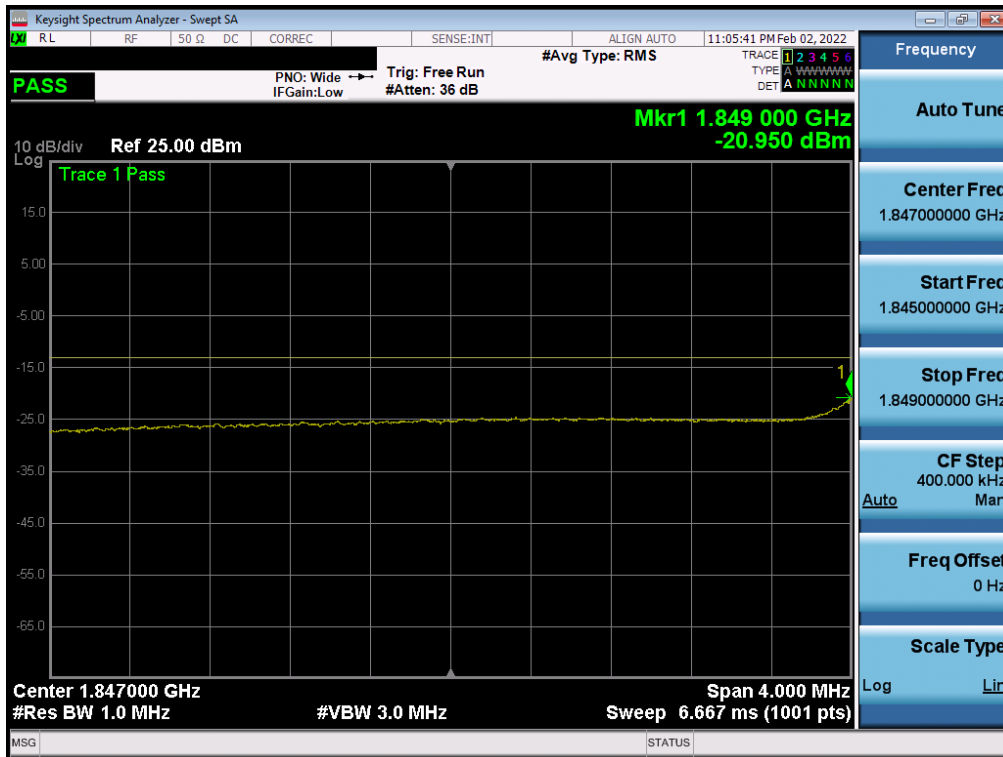

Plot 7-29. Extended Lower Band Edge Plot (NR Band n25/2 - 15MHz QPSK – Full RB)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 29 of 56

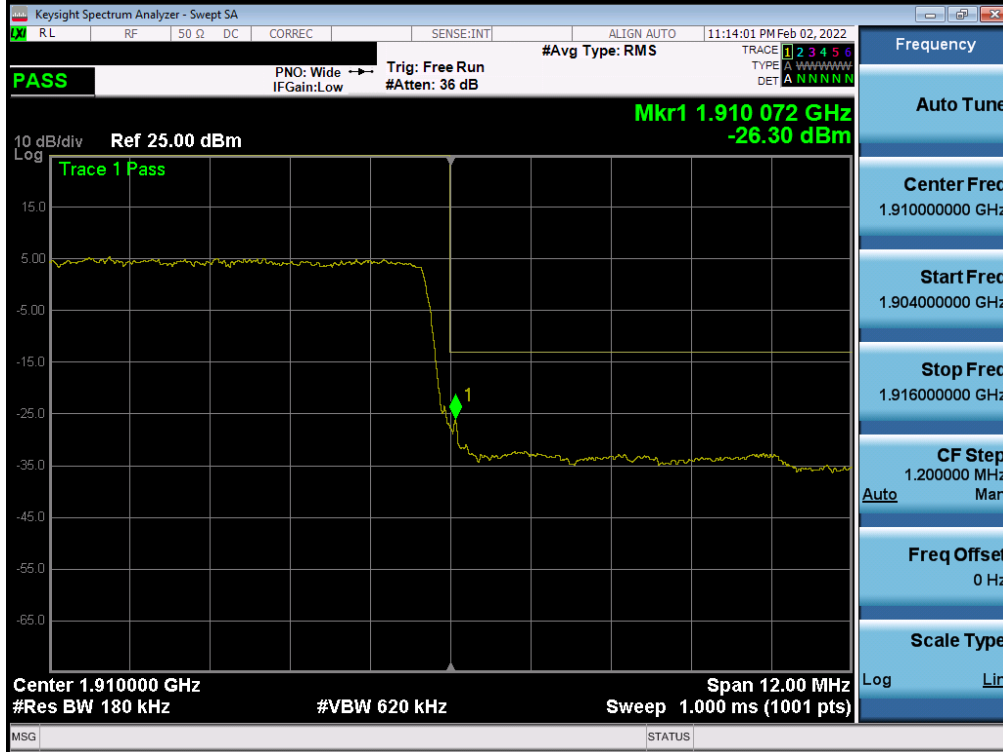


Plot 7-30. Upper Band Edge Plot (NR Band n2 - 15MHz QPSK – Full RB)




Plot 7-31. Extended Upper Band Edge Plot (NR Band n2 - 15MHz QPSK – Full RB)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 30 of 56

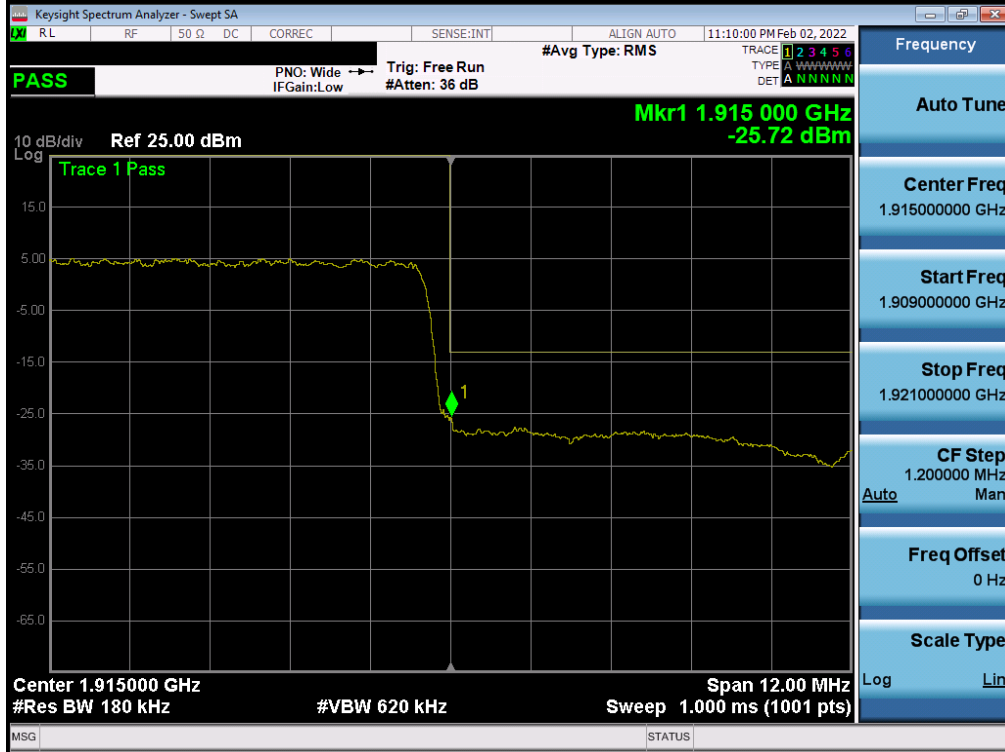


Plot 7-32. Upper Band Edge Plot (NR Band n25 - 15MHz QPSK – Full RB)

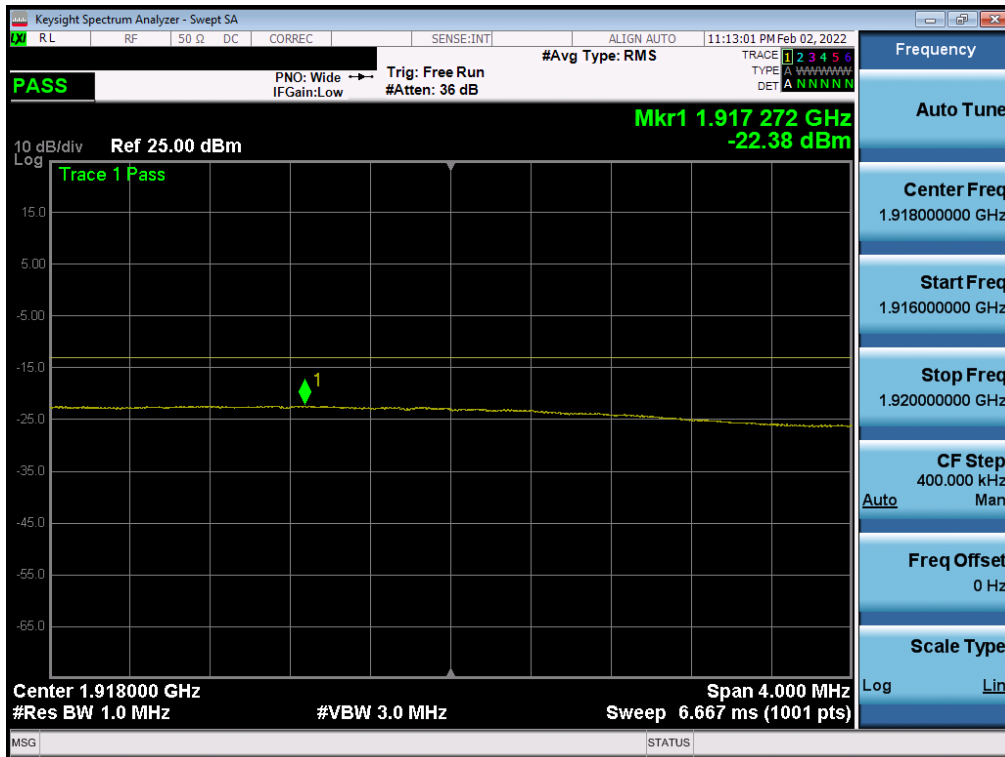


Plot 7-33. Extended Upper Band Edge Plot (NR Band n25 - 15MHz QPSK – Full RB)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 31 of 56

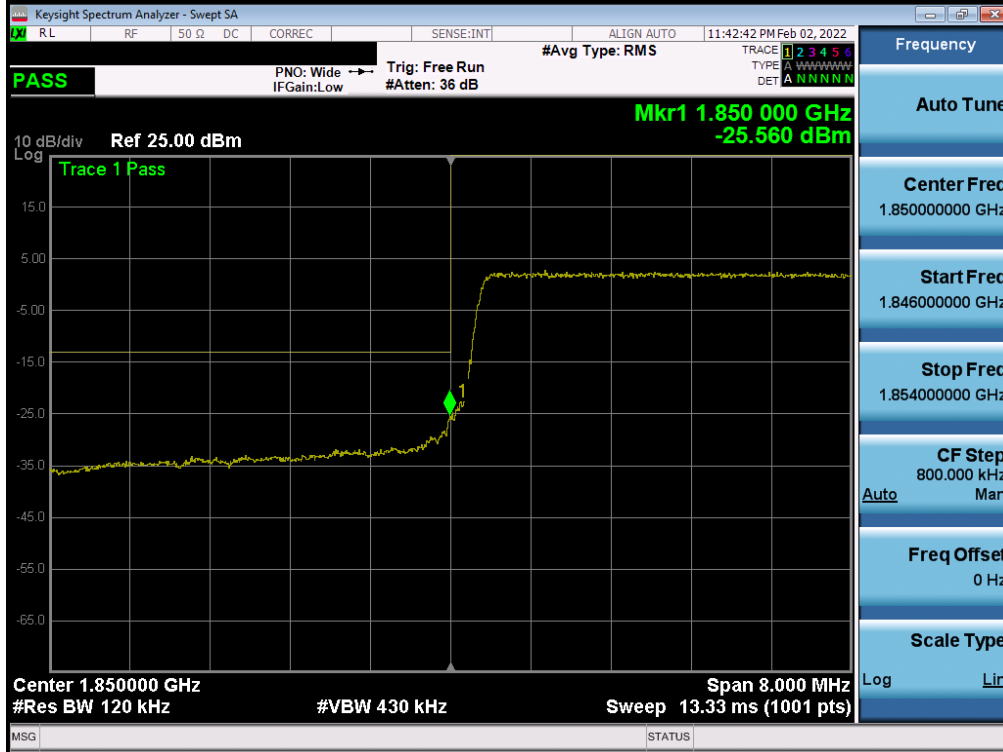

Plot 7-34. Lower Band Edge Plot (NR Band n25/2 - 10MHz QPSK – Full RB)

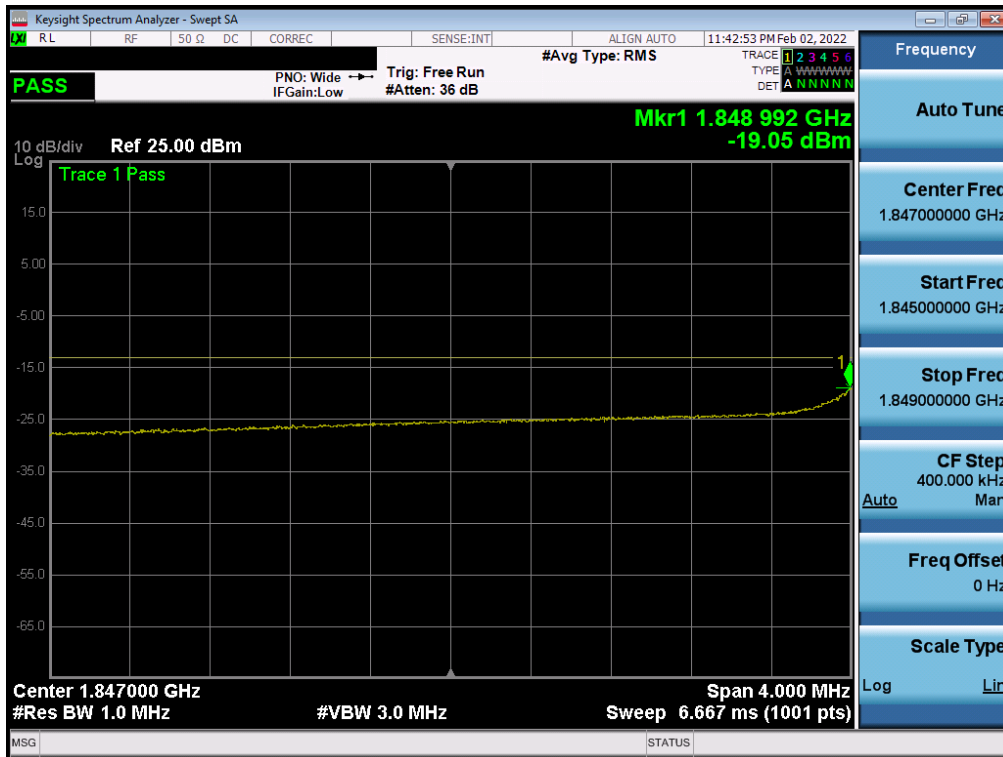


Plot 7-35. Extended Lower Band Edge Plot (NR Band n25/2 - 10MHz QPSK – Full RB)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 32 of 56





Plot 7-36. Upper Band Edge Plot (NR Band n2 - 10MHz QPSK – Full RB)

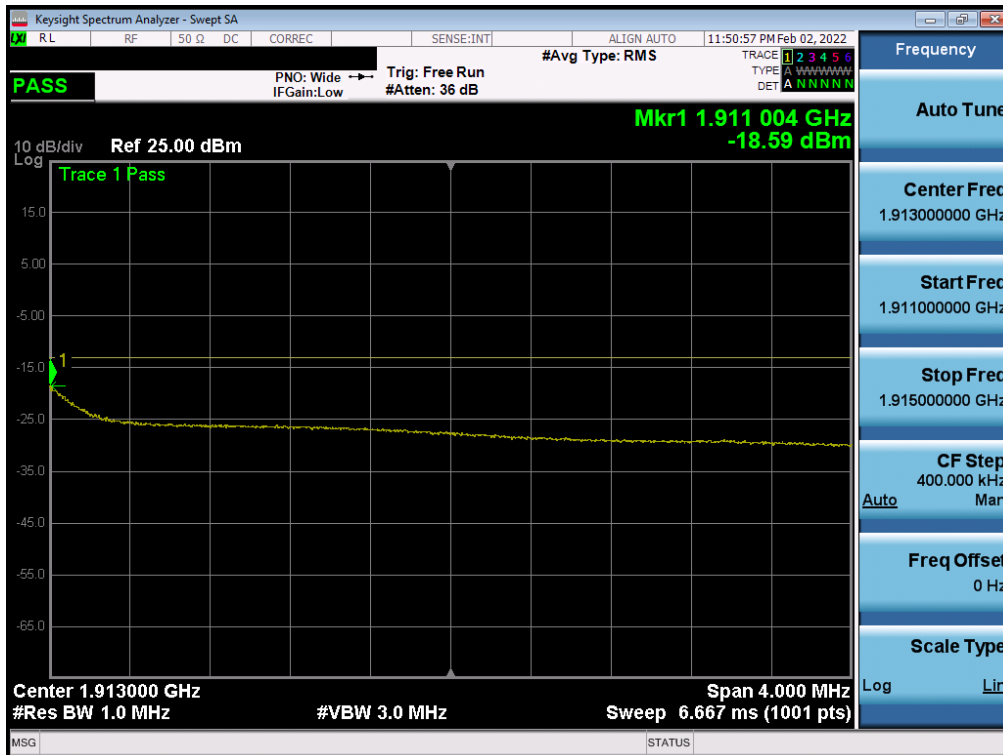

Plot 7-37. Extended Upper Band Edge Plot (NR Band n2 - 10MHz QPSK – Full RB)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 33 of 56




Plot 7-38. Upper Band Edge Plot (NR Band n25 - 10MHz QPSK – Full RB)




Plot 7-39. Extended Upper Band Edge Plot (NR Band n25 - 10MHz QPSK – Full RB)

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 34 of 56

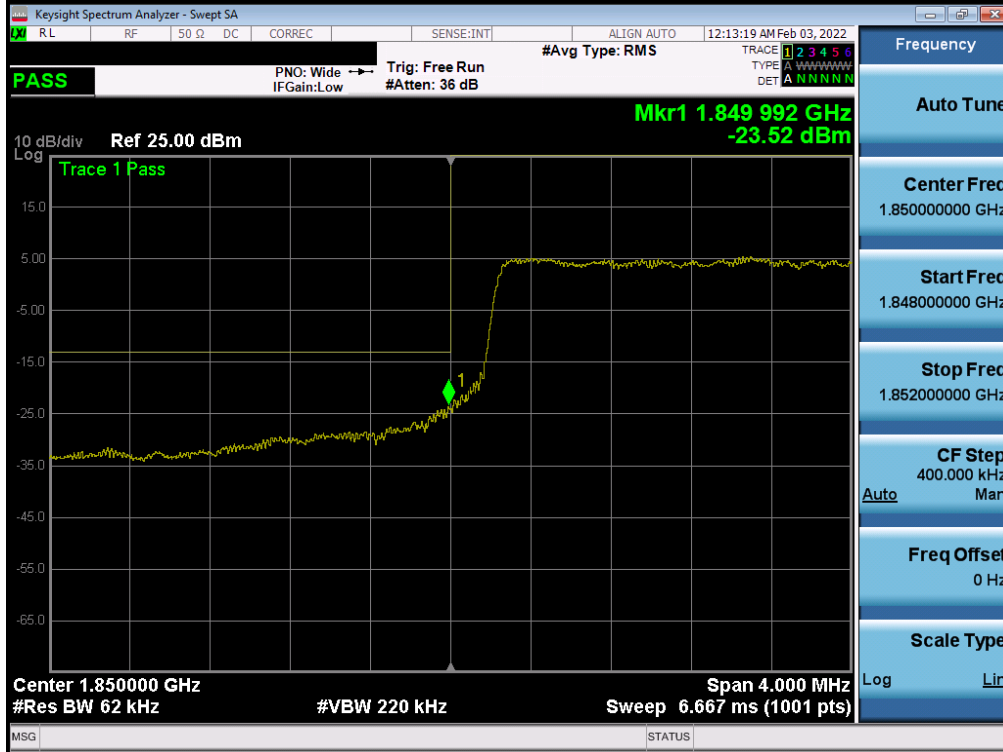

Plot 7-40. Lower Band Edge Plot (NR Band n25/2 – 5MHz QPSK – Full RB)

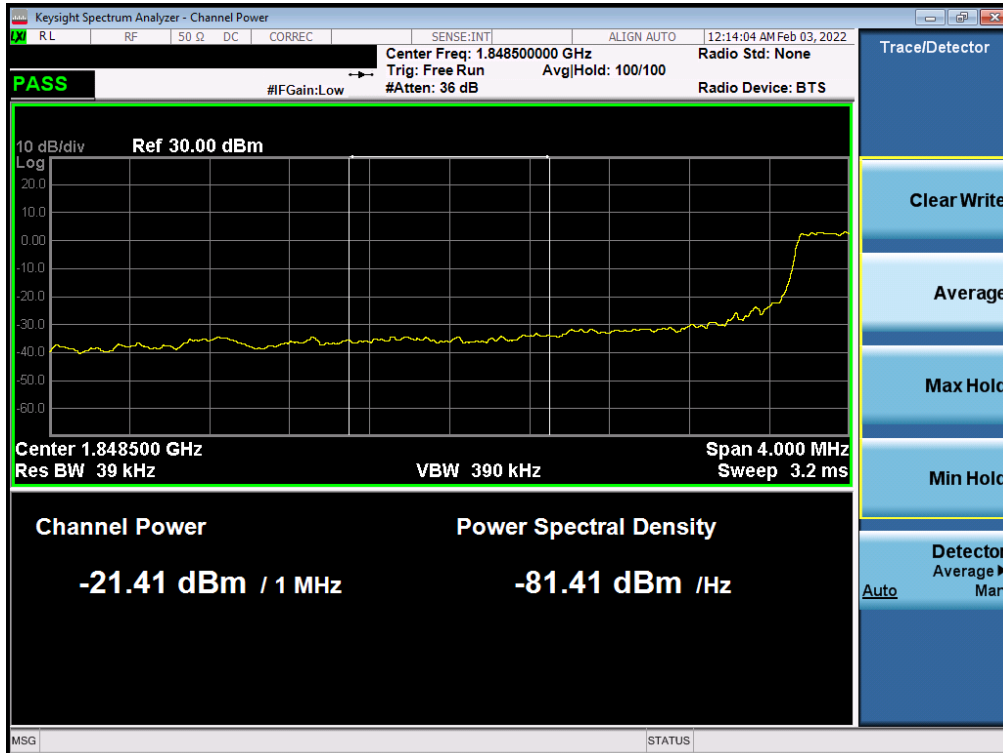


Plot 7-41. Extended Lower Band Edge Plot (NR Band n25/2 – 5MHz QPSK – Full RB)

FCC ID: A3LSMS906E	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 35 of 56



Plot 7-42. Upper Band Edge Plot (NR Band n2 – 5MHz QPSK – Full RB)

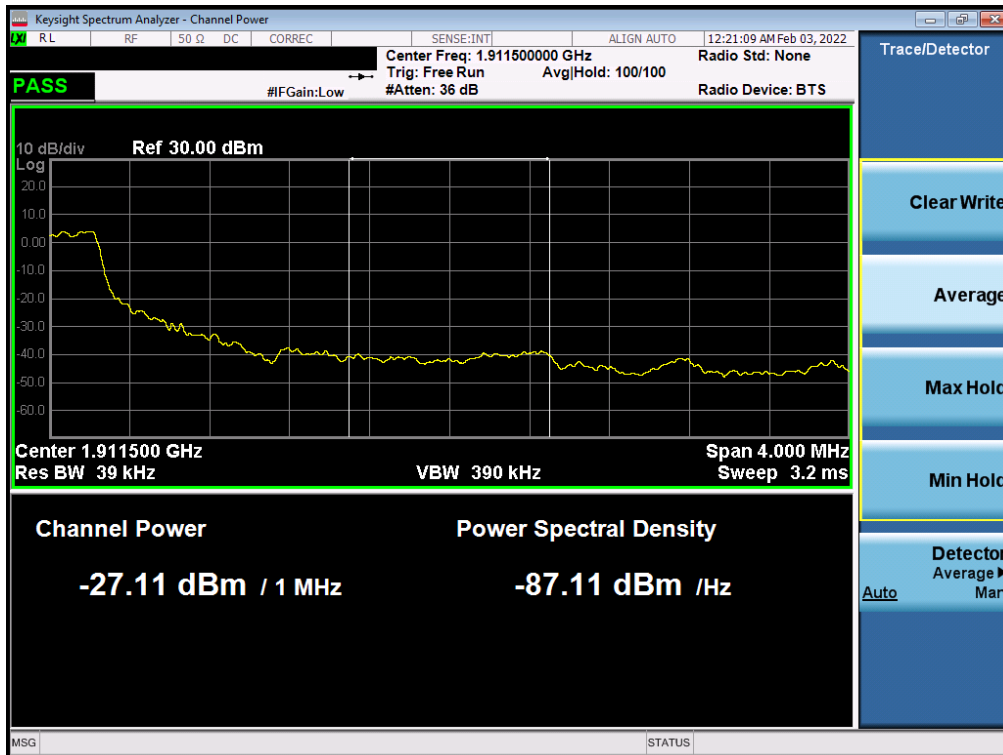


Plot 7-43. Extended Upper Band Edge Plot (NR Band n2 – 5MHz QPSK – Full RB)

FCC ID: A3LSMS906E	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 36 of 56



Plot 7-44. Upper Band Edge Plot (NR Band n25 – 5MHz QPSK – Full RB)

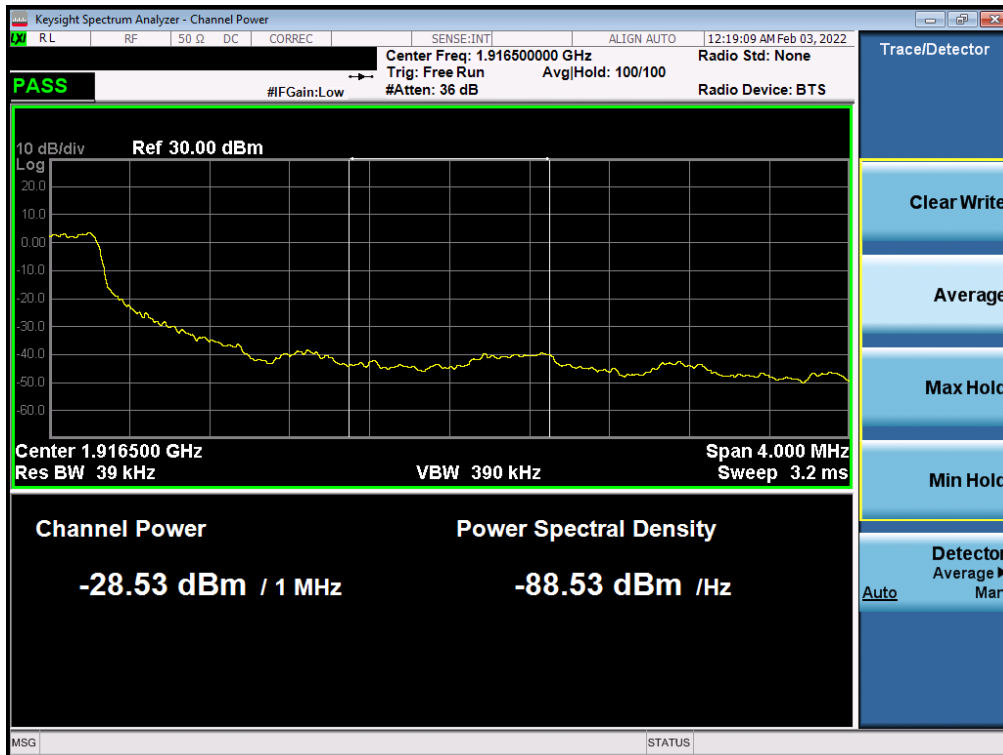

Plot 7-45. Extended Upper Band Edge Plot (NR Band n25 – 5MHz QPSK – Full RB)

FCC ID: A3LSMS906E	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 37 of 56

## 7.5 Peak-Average Ratio

### Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

### Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.7.1

### Test Settings

1. The signal analyzer’s CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW  $\geq$  OBW or specified reference bandwidth
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal “RF Burst” trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the “on time” of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

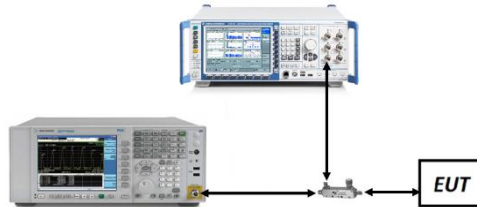



Figure 7-4. Test Instrument & Measurement Setup

### Test Notes


None.

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 38 of 56

**NR Band n25/2**

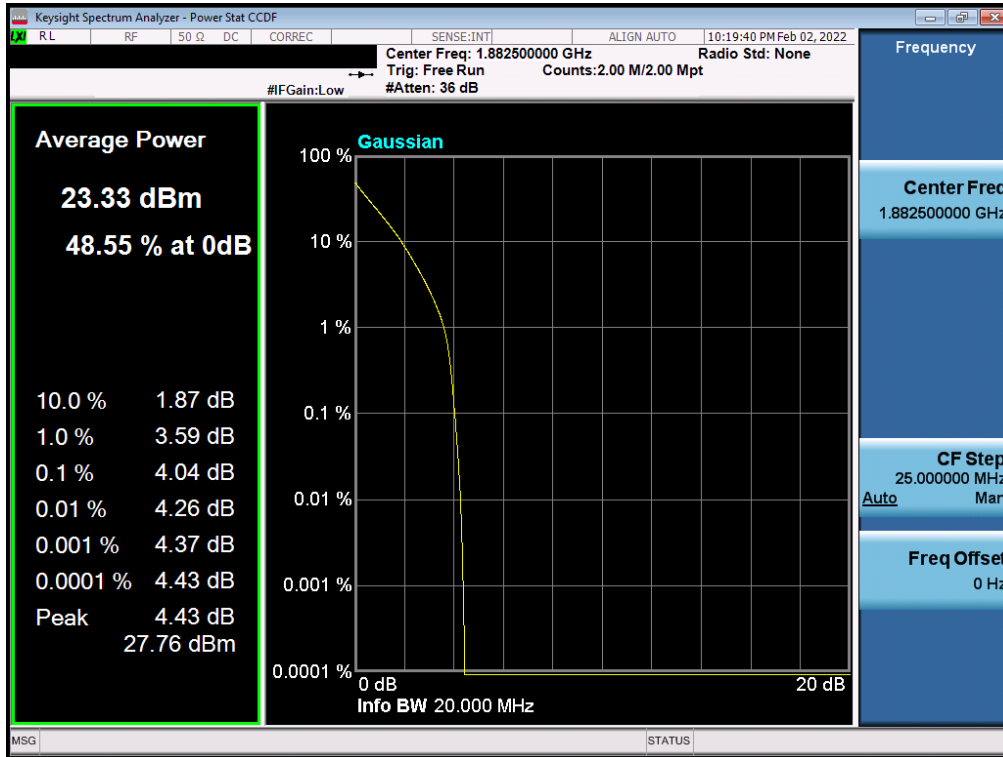


**Plot 7-46. PAR Plot (NR Band n25/2 - 20.0MHz DFT-s-OFDM BPSK - Full RB)**

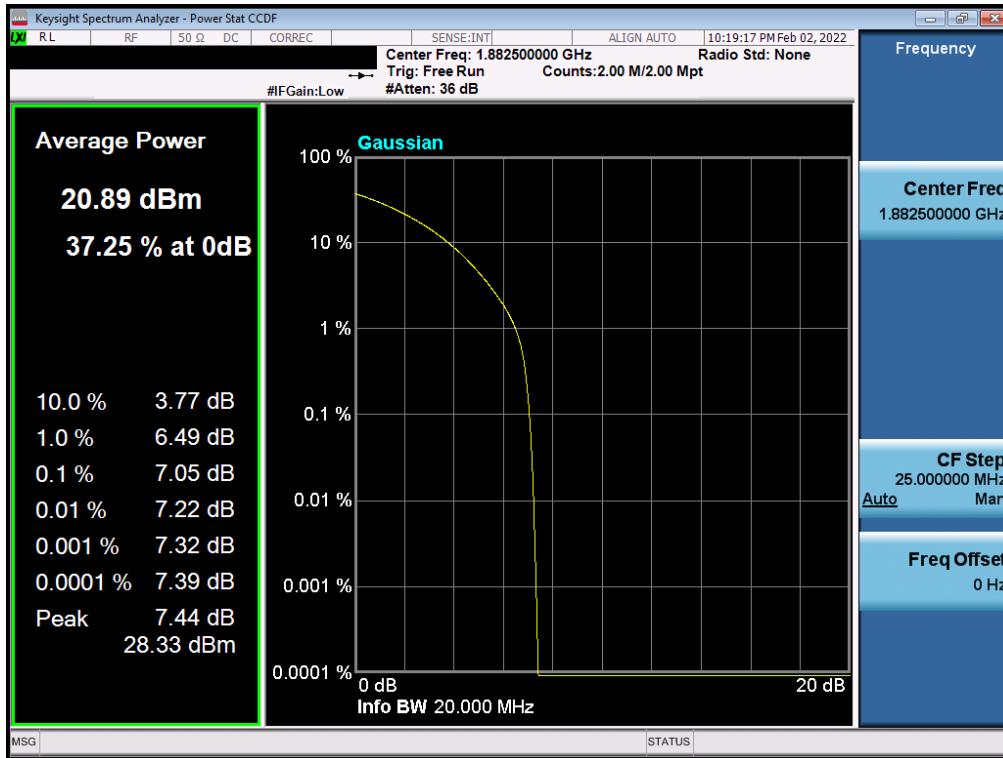


**Plot 7-47. PAR Plot (NR Band n25/2 - 20.0MHz CP-OFDM QPSK - Full RB)**

FCC ID: A3LSMS906E	<b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b> Class II Permissive Change	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 39 of 56

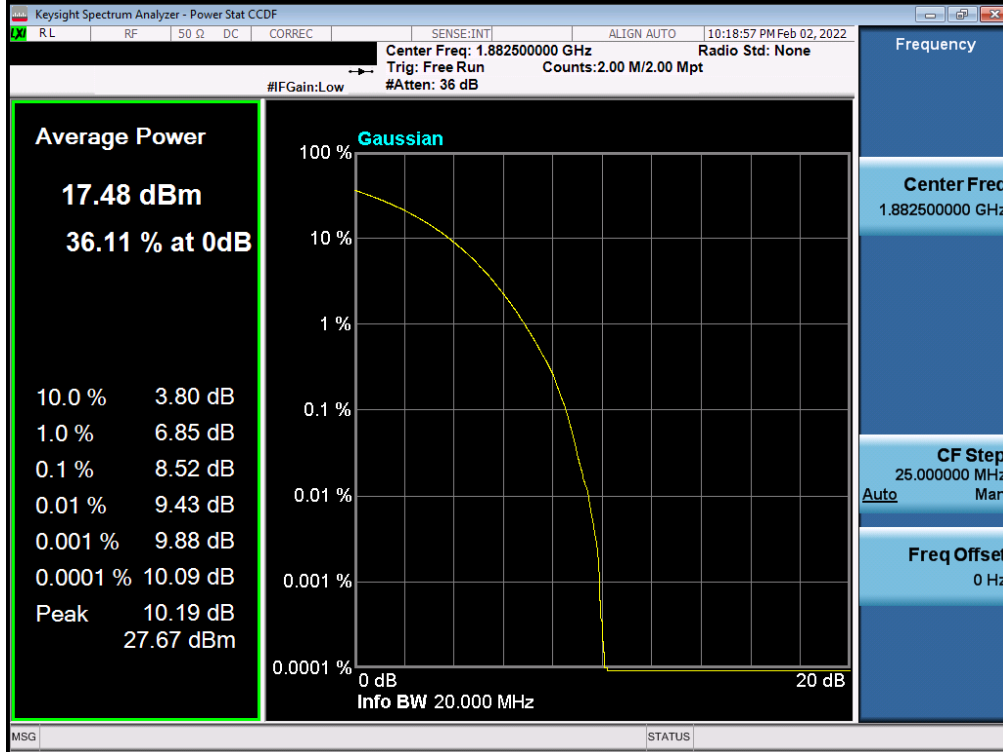


Plot 7-48. PAR Plot (NR Band n25/2 - 20.0MHz CP-OFDM 256-QAM - Full RB)

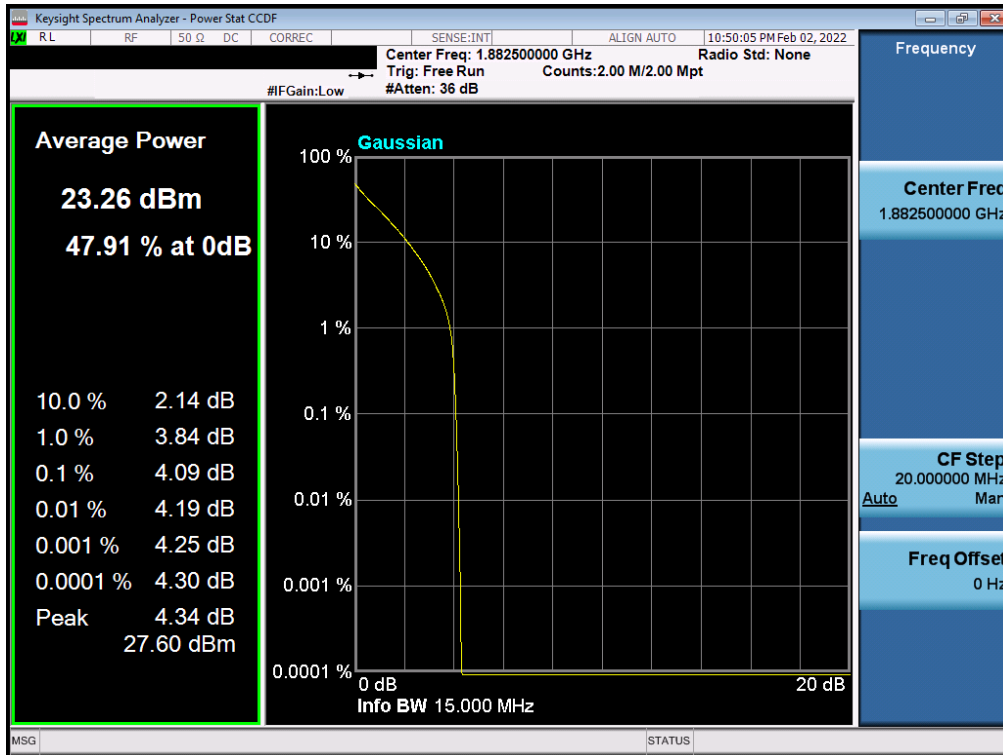


Plot 7-49. PAR Plot (NR Band n25/2 - 15.0MHz DFT-s-OFDM BPSK - Full RB)

FCC ID: A3LSMS906E	<b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b> Class II Permissive Change	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 40 of 56



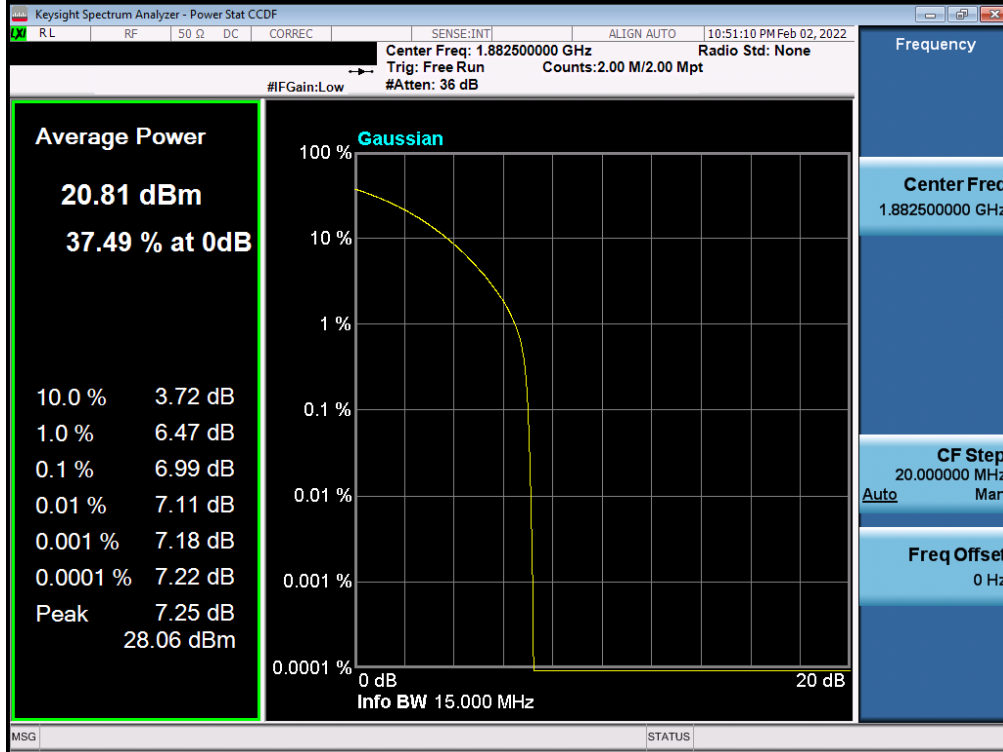


Plot 7-50. PAR Plot (NR Band n25/2 - 15.0MHz CP-OFDM QPSK - Full RB)

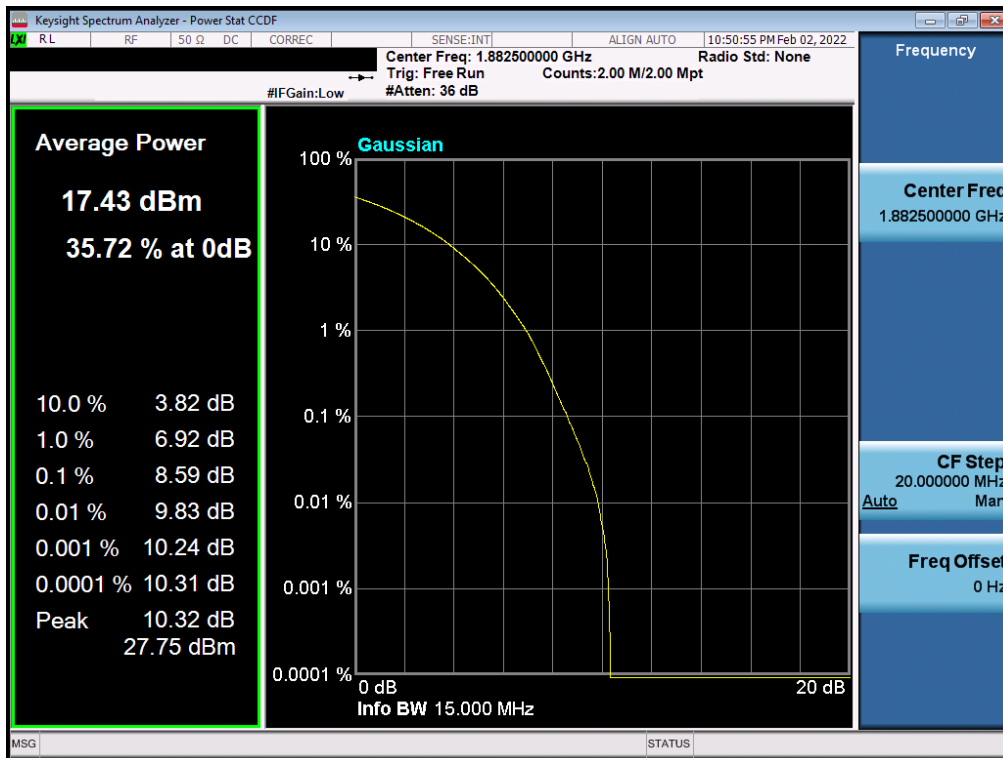


Plot 7-51. PAR Plot (NR Band n25/2 - 15.0MHz CP-OFDM 256-QAM - Full RB)

FCC ID: A3LSMS906E	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 41 of 56

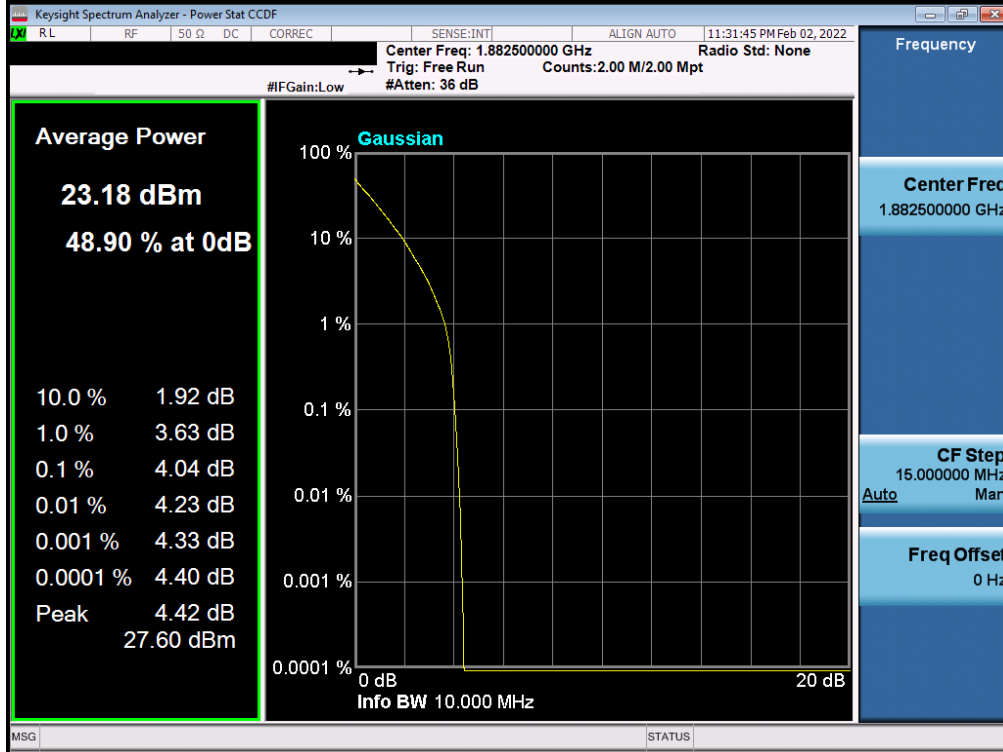


Plot 7-52. PAR Plot (NR Band n25/2 - 10.0MHz DFT-s-OFDM BPSK - Full RB)

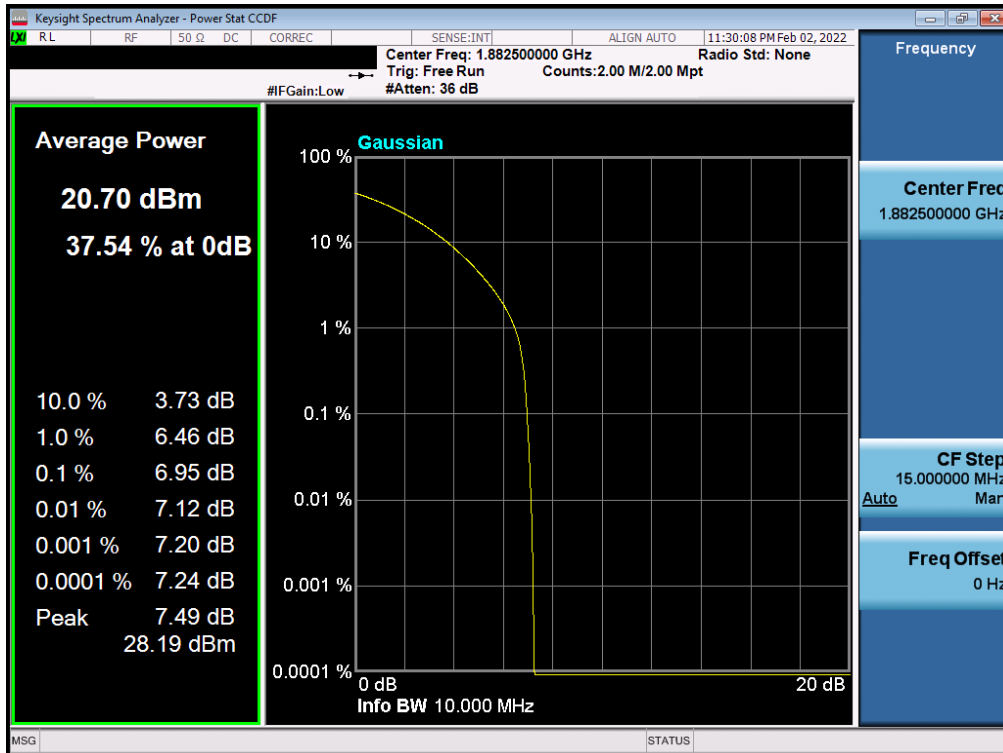


Plot 7-53. PAR Plot (NR Band n25/2 - 10.0MHz CP-OFDM QPSK - Full RB)

FCC ID: A3LSMS906E	<b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b> Class II Permissive Change	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 42 of 56

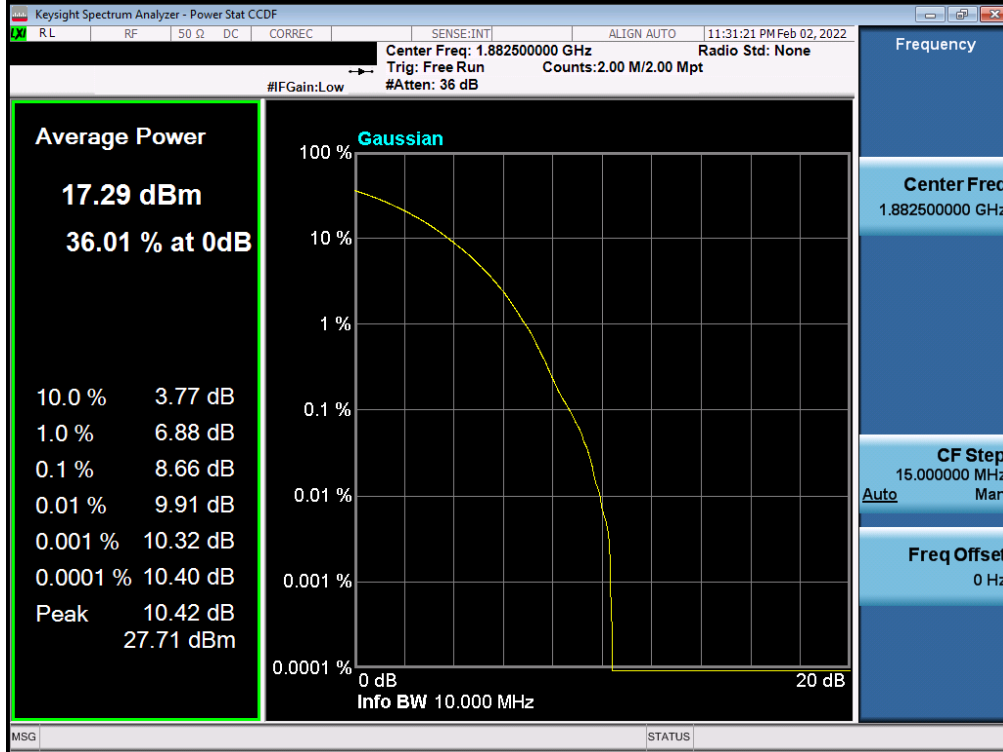


Plot 7-54. PAR Plot (NR Band n25/2 - 10.0MHz CP-OFDM 256-QAM - Full RB)

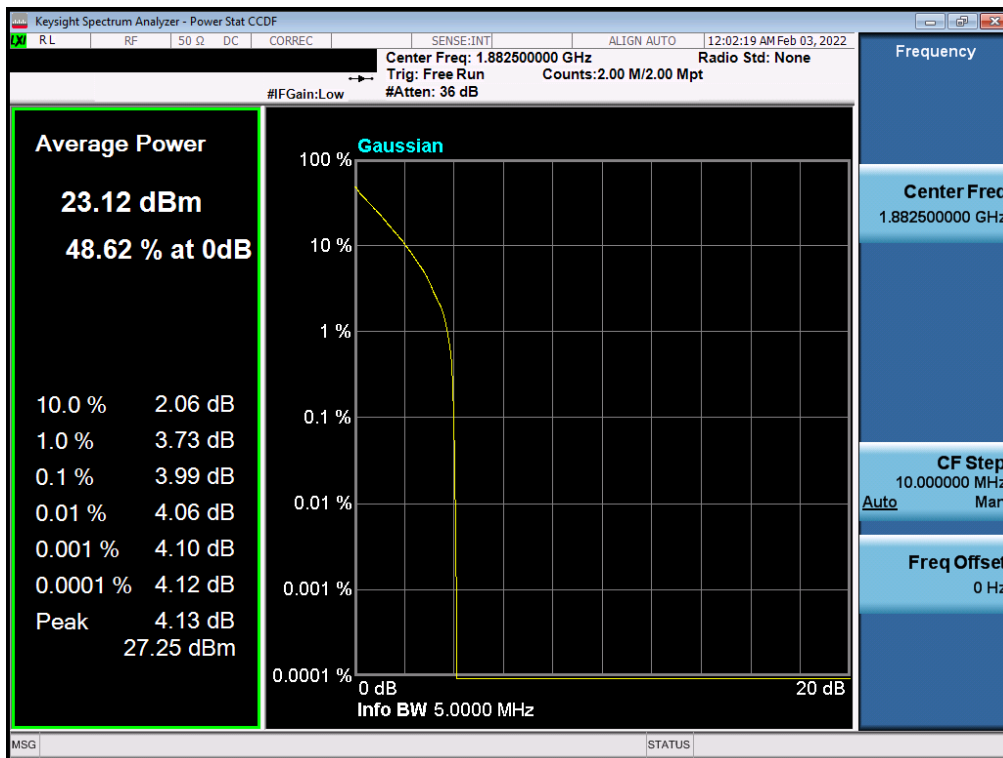


Plot 7-55. PAR Plot (NR Band n25/2 - 5.0MHz DFT-s-OFDM BPSK - Full RB)

FCC ID: A3LSMS906E	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 43 of 56

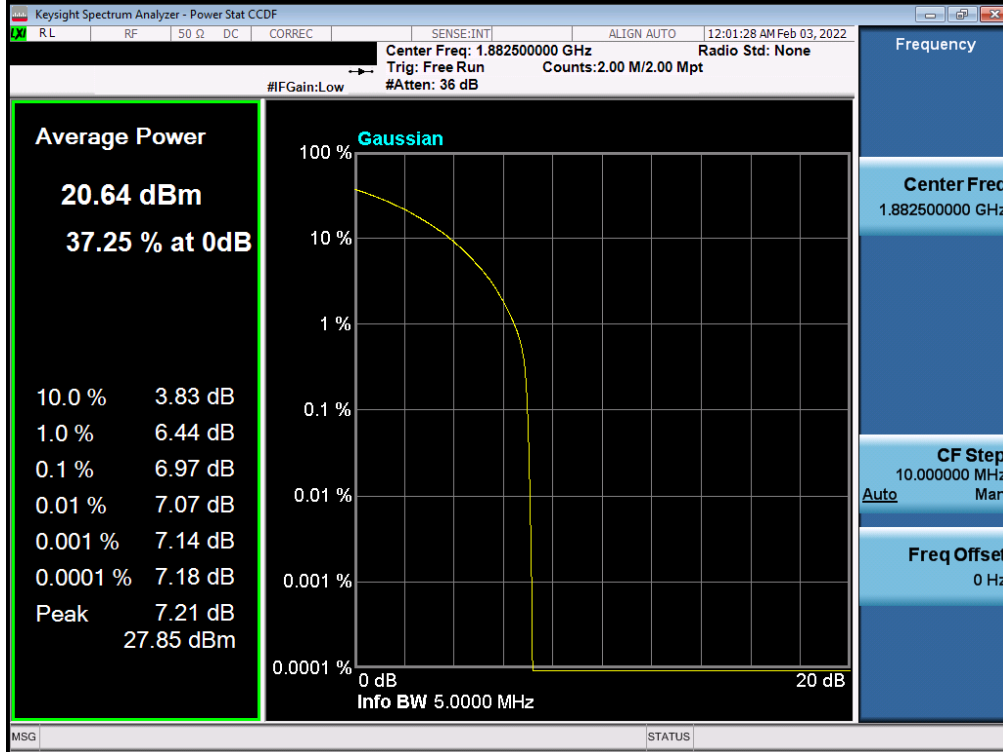

Plot 7-56. PAR Plot (NR Band n25/2 - 5.0MHz CP-OFDM QPSK - Full RB)

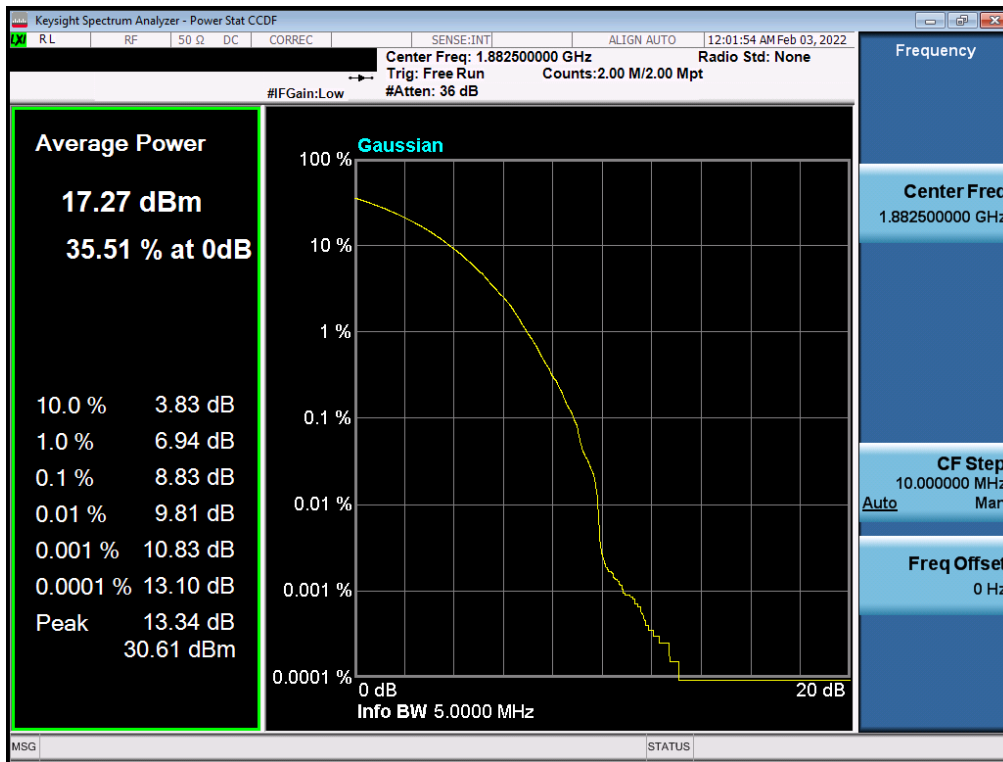

Plot 7-57. PAR Plot (NR Band n25/2 - 5.0MHz CP-OFDM 256-QAM - Full RB)

FCC ID: A3LSMS906E	<b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b> Class II Permissive Change	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 44 of 56

## 7.6 Radiated Power (ERP/EIRP)

### Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.



### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17


### Test Settings

1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer’s “time domain power” measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $\geq$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”. Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the “gating” function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: A3LSMS906E	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change		Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 45 of 56

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

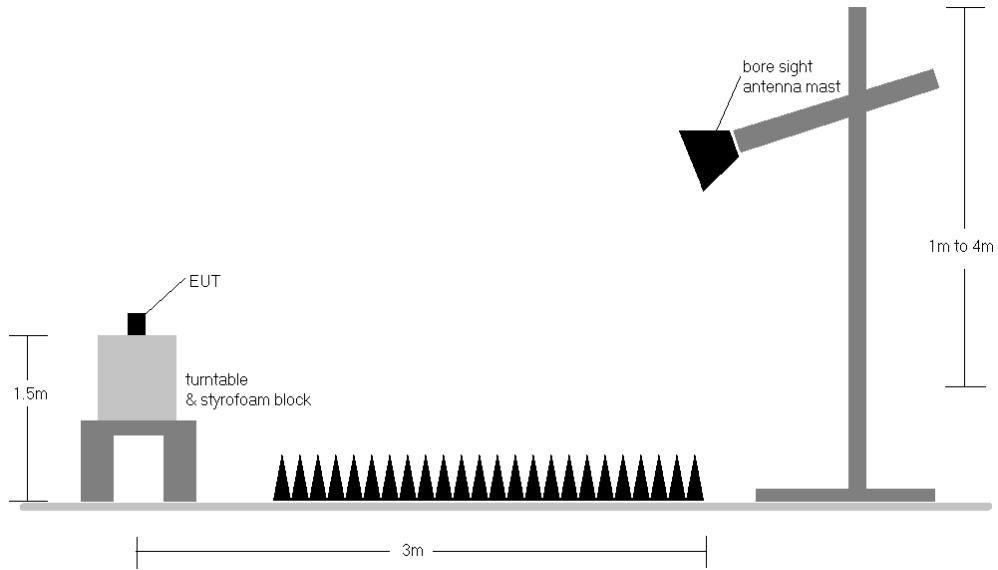

**Figure 7-5. Radiated Test Setup >1GHz**



<p>FCC ID: A3LSMS906E</p>	<p><b>PCTEST</b> Proud to be part of element</p>	<p><b>PART 24 MEASUREMENT REPORT</b> <b>Class II Permissive Change</b></p>	<p><b>Approved by:</b> Technical Manager</p>
<p><b>Test Report S/N:</b> 1M2202030009-04.A3L</p>	<p><b>Test Dates:</b> 02/01/2022 - 02/28/2022</p>	<p><b>EUT Type:</b> Portable Handset</p>	<p>Page 46 of 56</p>

## Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
20 MHz	$\pi/2$ BPSK	1860.0	V	113	334	9.68	1 / 53	14.17	23.84	0.242	33.01	-9.17
	$\pi/2$ BPSK	1882.5	V	205	340	9.99	1 / 79	13.81	23.80	0.240	33.01	-9.22
	$\pi/2$ BPSK	1905.0	V	115	333	10.18	1 / 26	12.92	23.10	0.204	33.01	-9.91
	QPSK	1860.0	V	113	334	9.68	1 / 53	14.13	23.81	0.240	33.01	-9.20
	QPSK	1882.5	V	205	340	9.99	1 / 79	13.95	<b>23.94</b>	0.248	33.01	-9.07
	QPSK	1905.0	V	115	333	10.18	1 / 26	13.13	23.32	0.215	33.01	-9.69
	16-QAM	1860.0	V	113	334	9.68	1 / 53	13.46	23.13	0.206	33.01	-9.88
15 MHz	$\pi/2$ BPSK	1857.5	V	113	334	9.66	1 / 39	14.23	<b>23.88</b>	0.245	33.01	-9.13
	$\pi/2$ BPSK	1882.5	V	205	340	9.99	1 / 58	13.77	23.76	0.237	33.01	-9.25
	$\pi/2$ BPSK	1907.5	V	115	333	10.19	1 / 39	12.95	23.14	0.206	33.01	-9.87
	QPSK	1857.5	V	113	334	9.66	1 / 39	14.16	23.82	0.241	33.01	-9.19
	QPSK	1882.5	V	205	340	9.99	1 / 58	13.78	23.77	0.238	33.01	-9.24
	QPSK	1907.5	V	115	333	10.19	1 / 39	13.01	23.21	0.209	33.01	-9.80
	16-QAM	1857.5	V	113	334	9.66	1 / 39	13.25	22.91	0.195	33.01	-10.10
10 MHz	$\pi/2$ BPSK	1855.0	V	113	334	9.64	1 / 13	14.02	23.66	0.232	33.01	-9.35
	$\pi/2$ BPSK	1882.5	V	205	340	9.99	1 / 38	13.70	23.69	0.234	33.01	-9.32
	$\pi/2$ BPSK	1910.0	V	115	333	10.20	1 / 13	12.78	22.98	0.199	33.01	-10.03
	QPSK	1855.0	V	113	334	9.64	1 / 13	14.20	<b>23.84</b>	0.242	33.01	-9.17
	QPSK	1882.5	V	205	340	9.99	1 / 38	13.71	23.70	0.235	33.01	-9.31
	QPSK	1910.0	V	115	333	10.20	1 / 13	12.86	23.06	0.202	33.01	-9.95
	16-QAM	1855.0	V	113	334	9.64	1 / 13	13.44	23.08	0.203	33.01	-9.93
5 MHz	$\pi/2$ BPSK	1852.5	V	113	334	9.63	1 / 6	14.17	23.79	0.240	33.01	-9.22
	$\pi/2$ BPSK	1882.5	V	205	340	9.99	1 / 12	13.56	23.55	0.227	33.01	-9.46
	$\pi/2$ BPSK	1912.5	V	115	333	10.21	1 / 12	12.80	23.00	0.200	33.01	-10.01
	QPSK	1852.5	V	113	334	9.63	1 / 6	14.30	<b>23.92</b>	0.247	33.01	-9.09
	QPSK	1882.5	V	205	340	9.99	1 / 12	13.52	23.51	0.224	33.01	-9.50
	QPSK	1912.5	V	115	333	10.21	1 / 12	12.90	23.10	0.204	33.01	-9.91
	16-QAM	1852.5	V	113	334	9.63	1 / 6	13.47	23.10	0.204	33.01	-9.91
20 MHz	QPSK (CP-OFDM)	1870.0	V	127	321	9.99	1 / 54	12.20	22.19	0.165	33.01	-10.82
	QPSK (Opposite Pol.)	1870.0	H	122	359	9.83	1 / 54	12.46	22.29	0.169	33.01	-10.72
	QPSK (WCP)	1870.0	H	154	339	9.83	1 / 54	13.70	23.53	0.225	33.01	-9.48

Table 7-2. EIRP Data (NR Band n25/2)

FCC ID: A3LSMS906E	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change		Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 47 of 56

## 7.7 Radiated Spurious Emissions Measurements

### Test Overview



Radiated spurious emissions measurements are performed using the field strength conversion method described in KDB 971168 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

### Test Settings


1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq 2 \times$  span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: A3LSMS906E	 <b>PART 24 MEASUREMENT REPORT</b> <b>Class II Permissive Change</b>		 <b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2202030009-04.A3L	<b>Test Dates:</b> 02/01/2022 - 02/28/2022	<b>EUT Type:</b> Portable Handset	Page 48 of 56




**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

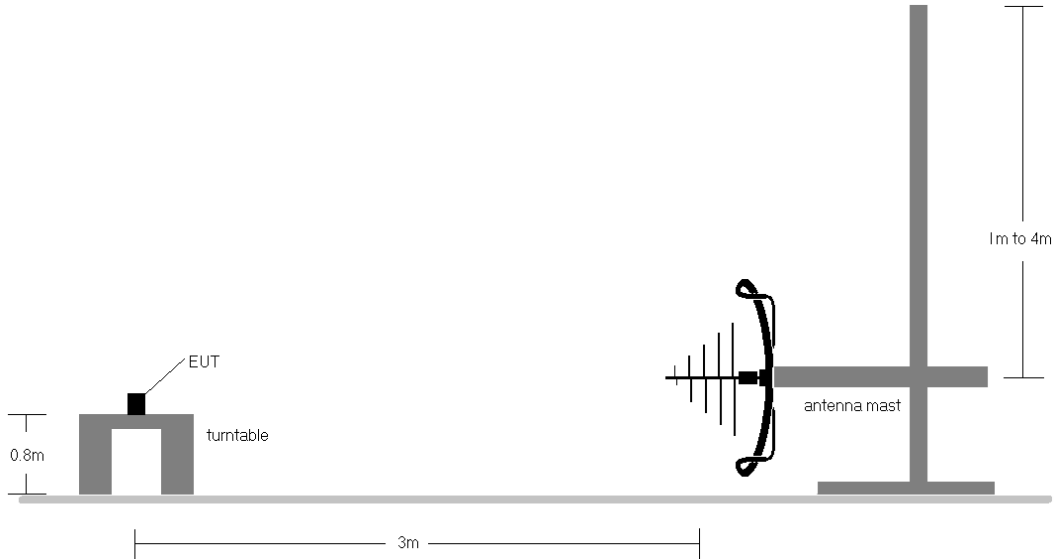

**Figure 7-6. Test Instrument & Measurement Setup < 1GHz**

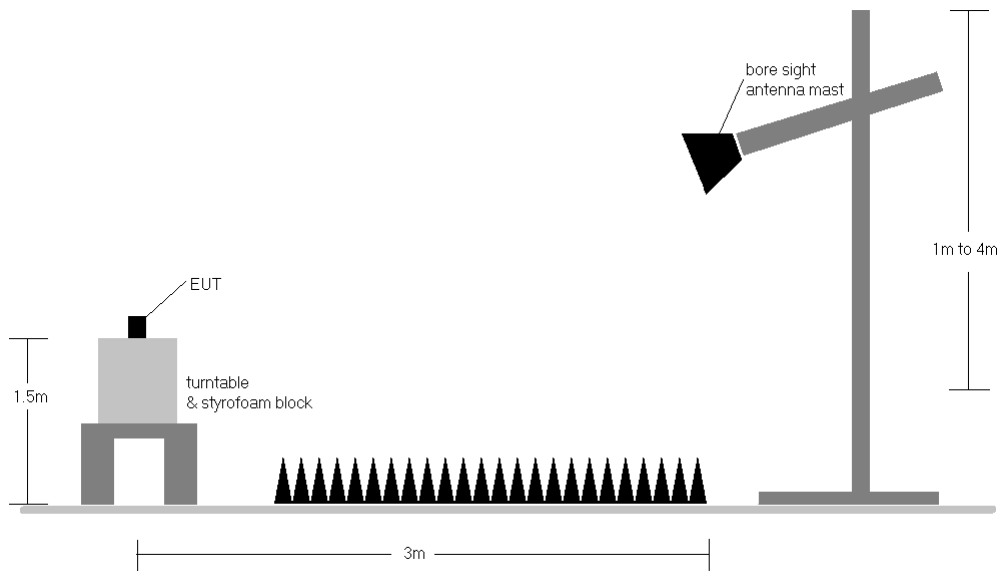



**Figure 7-7. Test Instrument & Measurement Setup >1 GHz**


<p>FCC ID: A3LSMS906E</p>		<p>PART 24 MEASUREMENT REPORT Class II Permissive Change</p>	<p>Approved by: Technical Manager</p>
<p>Test Report S/N: 1M2202030009-04.A3L</p>	<p>Test Dates: 02/01/2022 - 02/28/2022</p>	<p>EUT Type: Portable Handset</p>	<p>Page 49 of 56</p>

## Test Notes


- 1) Field strengths are calculated using the Measurement quantity conversions in KDB 971168 Section 5.8.4.
  - a)  $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
  - b)  $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$ ; where D is the measurement distance in meters.
- 2) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 3) This unit was tested with its standard battery.
- 4) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 5) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 6) The "-" shown in the following RSE tables are used to denote a noise floor measurement.
- 7) For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.
- 8) Spurious emissions shown in this section are measured while operating in EN-DC mode with Sub 6GHz NR carrier as well as an LTE carrier (anchor). Spurious emissions from the NR carrier device, is subject to the rules under which the NR carrier operates. Spurious emission caused by the LTE carrier must meet the requirements of the rules under which the LTE carrier operates.

FCC ID: A3LSMS906E	 <b>PART 24 MEASUREMENT REPORT</b> <b>Class II Permissive Change</b> 		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2202030009-04.A3L	<b>Test Dates:</b> 02/01/2022 - 02/28/2022	<b>EUT Type:</b> Portable Handset	Page 50 of 56

## NR Band n25/2

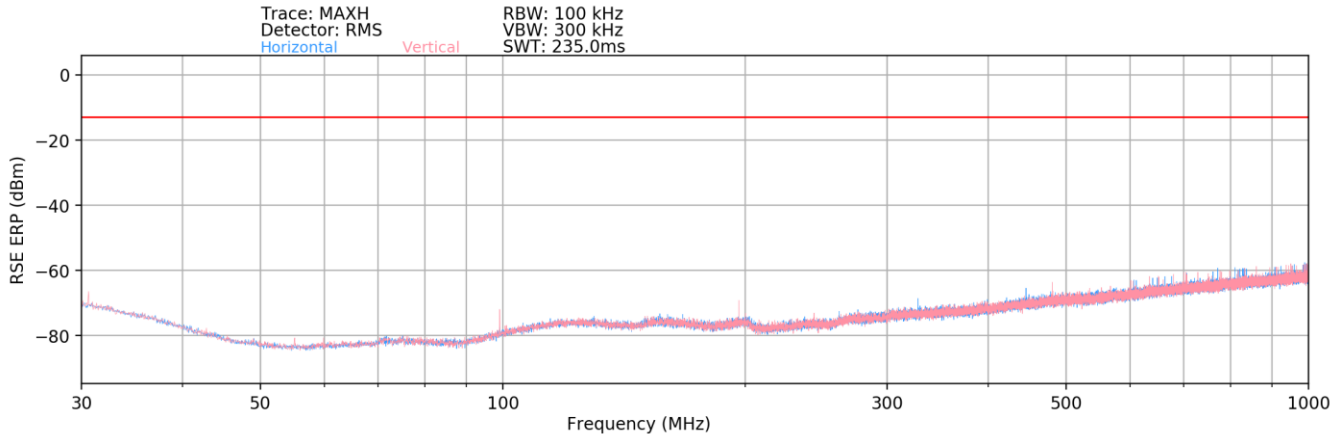

**Plot 7-58. Radiated Spurious Plot (NR Band n25/2 – 30MHz-1GHz)**

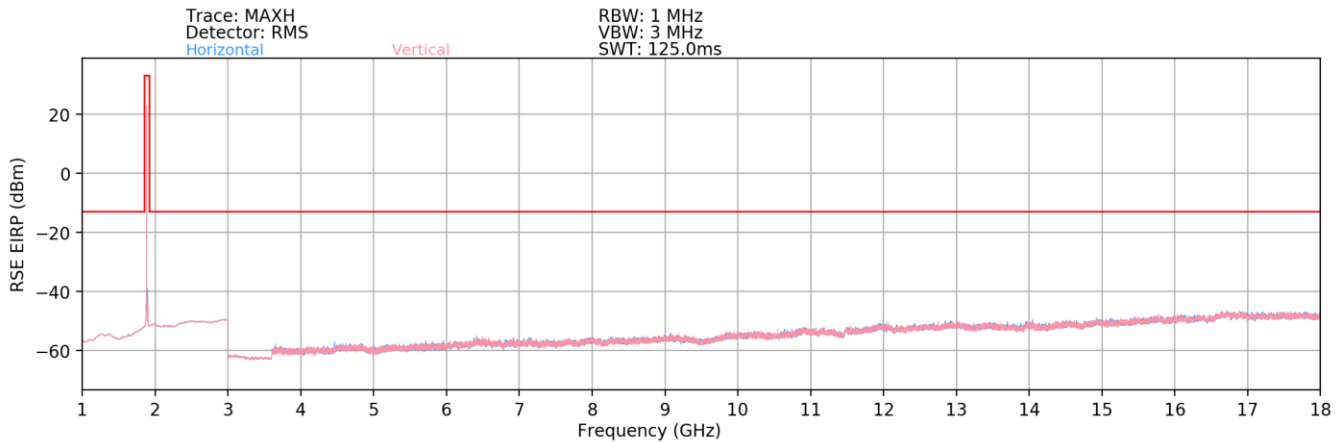

**Plot 7-59. Radiated Spurious Plot (NR Band n25/2 –1-18GHz)**

Bandwidth (MHz):	20
Frequency (MHz):	1860.0
RB / Offset:	1 / 53
Mode:	Stand Alone

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3720.0	V	-	-	-77.91	3.32	32.41	-62.85	-13.00	-49.85
5580.0	V	249	15	-74.33	5.05	37.72	-57.54	-13.00	-44.54
7440.0	V	-	-	-78.89	7.31	35.42	-59.84	-13.00	-46.84
9300.0	V	-	-	-79.38	9.24	36.86	-58.39	-13.00	-45.39
11160.0	V	-	-	-80.03	12.09	39.06	-56.20	-13.00	-43.20
13020.0	V	-	-	-80.22	14.53	41.31	-53.94	-13.00	-40.94
14880.0	V	-	-	-80.89	15.93	42.04	-53.22	-13.00	-40.22
16740.0	V	-	-	-80.35	18.44	45.09	-50.16	-13.00	-37.16

**Table 7-3. Radiated Spurious Data (NR Band n25/2 – Low Channel)**

FCC ID: A3LSMS906E	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset	Page 51 of 56	

Bandwidth (MHz):	20
Frequency (MHz):	1882.5
RB / Offset:	1 / 53
Mode:	Stand Alone



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3765.0	V	-	-	-78.14	3.08	31.94	-63.32	-13.00	-50.32
5647.5	V	296	242	-77.84	5.38	34.54	-60.71	-13.00	-47.71
7530.0	V	-	-	-78.88	7.55	35.67	-59.59	-13.00	-46.59
9412.5	V	-	-	-79.97	9.98	37.01	-58.25	-13.00	-45.25
11295.0	V	-	-	-80.24	12.12	38.88	-56.38	-13.00	-43.38
13177.5	V	-	-	-80.43	13.85	40.42	-54.84	-13.00	-41.84
15060.0	V	-	-	-80.37	15.36	41.99	-53.27	-13.00	-40.27
16942.5	V	-	-	-79.75	18.03	45.28	-49.98	-13.00	-36.98

Table 7-4. Radiated Spurious Data (NR Band n25/2 – Mid Channel)


Bandwidth (MHz):	20
Frequency (MHz):	1905.0
RB / Offset:	1 / 53
Mode:	Stand Alone

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3810.0	V	-	-	-77.78	2.93	32.15	-63.11	-13.00	-50.11
5715.0	V	119	102	-73.67	5.32	38.65	-56.60	-13.00	-43.60
7620.0	V	-	-	-79.21	7.77	35.56	-59.70	-13.00	-46.70
9525.0	V	-	-	-79.99	9.98	36.99	-58.27	-13.00	-45.27
11430.0	V	-	-	-80.44	12.80	39.36	-55.90	-13.00	-42.90
13335.0	V	-	-	-80.29	13.93	40.64	-54.62	-13.00	-41.62
15240.0	V	-	-	-80.20	15.82	42.62	-52.63	-13.00	-39.63
17145.0	V	-	-	-79.94	17.75	44.81	-50.45	-13.00	-37.45


Table 7-5. Radiated Spurious Data (NR Band n25/2 – High Channel)

FCC ID: A3LSMS906E	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change		Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset	Page 52 of 56	

## EN-DC: NR Band n25/2 – Band 12

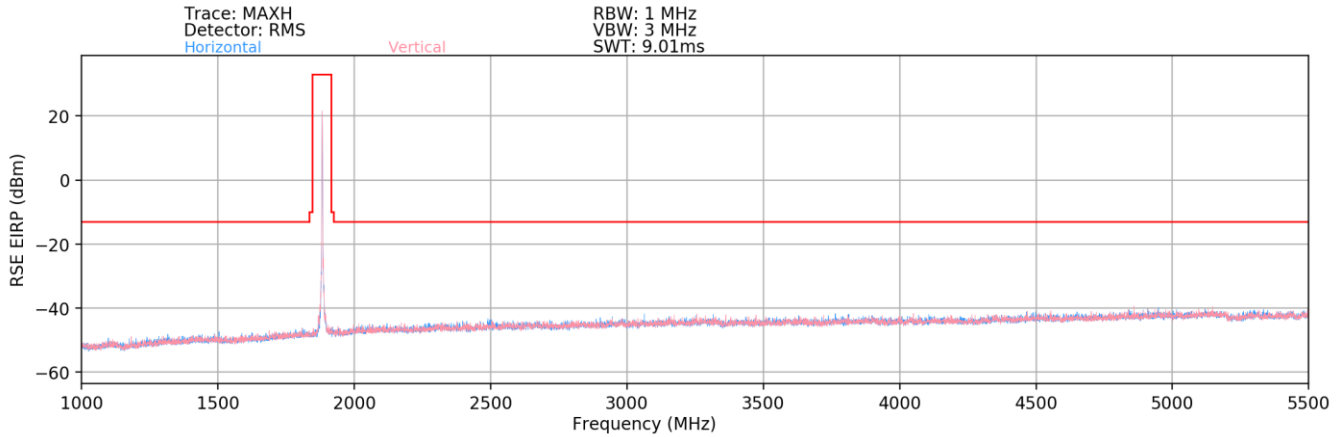

**Plot 7-60. Radiated Spurious Plot (EN-DC: n25/2 – Band 12 – 1-5.5GHz)**

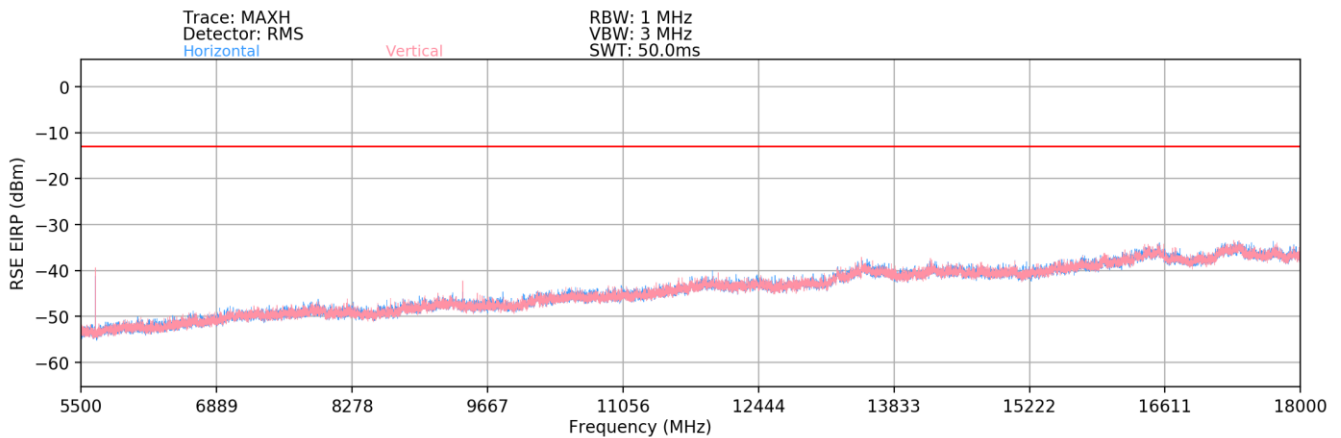

**Plot 7-61. Radiated Spurious Plot (EN-DC: n25/2 – Band 12 – 5.5-18GHz)**

Case:	n25/2-B12
Bandwidth (MHz):	20 & 10
Frequency (MHz):	1882.5 & 707.5
RB / Offset:	1/53 & 1/25
Mode:	EN-DC
Anchor Band:	Band 12

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5647.5	V	102	20	-65.90	11.06	52.16	-43.10	-13.00	-30.10
9412.5	V	101	321	-78.70	18.89	47.19	-48.07	-13.00	-35.07
10107.5	V	-	-	-83.97	19.81	42.84	-52.42	-13.00	-39.42
11282.5	V	-	-	-84.45	21.97	44.52	-50.74	-13.00	-37.74
12457.5	V	-	-	-84.26	24.15	46.89	-48.36	-13.00	-35.36

**Table 7-6. Radiated Spurious Data (EN-DC: n25/2 – Band 12)**

FCC ID: A3LSMS906E	<b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b> Class II Permissive Change	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset	Page 53 of 56	

## 7.8 Frequency Stability / Temperature Variation

### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

### Test Procedure Used

ANSI/TIA-603-E-2016

### Test Settings



1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.


### Test Notes

None

FCC ID: A3LSMS906E	 PCTEST® Proud to be part of element	PART 24 MEASUREMENT REPORT Class II Permissive Change		Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 54 of 56

NR Band n25/2					
Operating Frequency (Hz):		1,882,500,000			
Ref. Voltage (VDC):		4.40			
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.40	- 30	1,882,580,506	1,614	0.0000857
		- 20	1,882,580,825	1,932	0.0001026
		- 10	1,882,580,371	1,479	0.0000786
		0	1,882,579,700	807	0.0000429
		+ 10	1,882,580,083	1,191	0.0000632
		+ 20 (Ref)	1,882,578,892	0	0.0000000
		+ 30	1,882,579,994	1,101	0.0000585
		+ 40	1,882,579,796	904	0.0000480
Battery Endpoint	3.85	+ 20	1,882,579,682	789	0.0000419

**Table 7-7. NR Band n25/2 Frequency Stability Data**

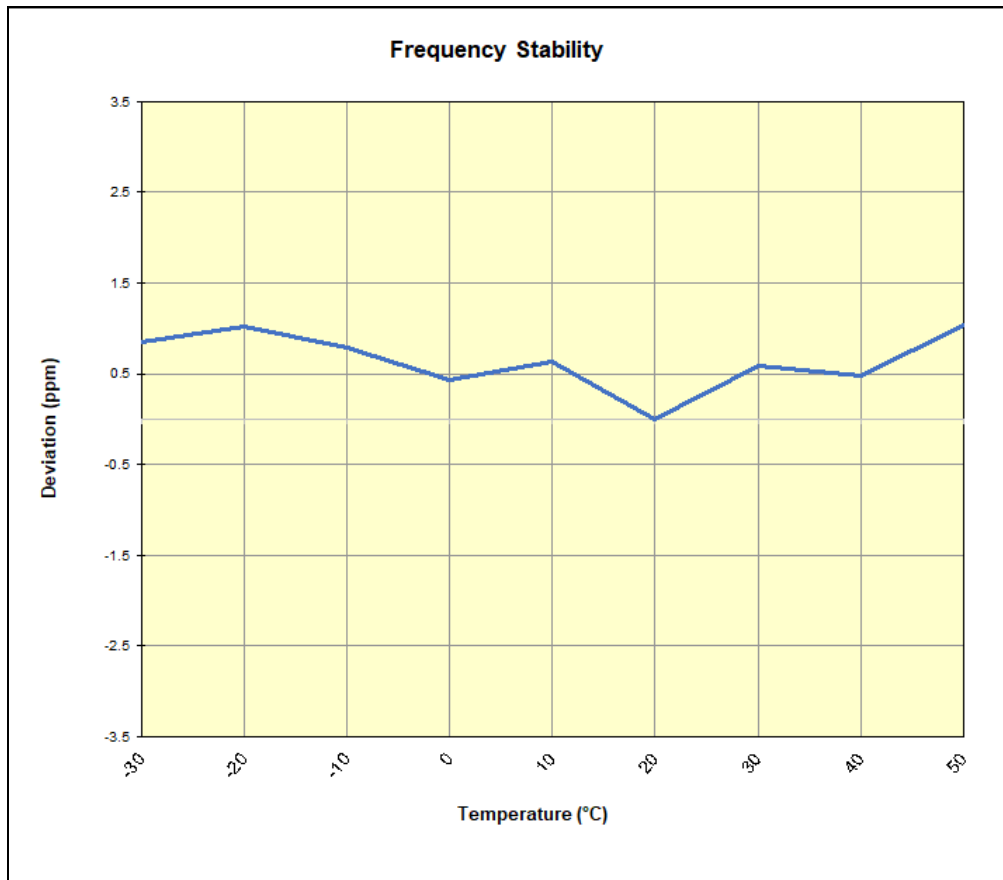



**Plot 7-62. NR Band n25/2 Frequency Stability Chart**

FCC ID: A3LSMS906E	<b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b> Class II Permissive Change	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2202030009-04.A3L	Test Dates: 02/01/2022 - 02/28/2022	EUT Type: Portable Handset		Page 55 of 56

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the Samsung **Portable Handset** **FCC ID: A3LSMS906E** complies with all the requirements of Part 24 of the FCC rules.

<b>FCC ID:</b> A3LSMS906E		<b>PART 24 MEASUREMENT REPORT</b> <b>Class II Permissive Change</b>	 <b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2202030009-04.A3L	<b>Test Dates:</b> 02/01/2022 - 02/28/2022	<b>EUT Type:</b> Portable Handset	Page 56 of 56