

Head Tissue Simulating Liquids

Head Tissue	Parameters according to IEEE Std 1528-2013 / IEC 62209 / FCC KDB 865664 D01		
Narrow-Band Solutions (±5% tolerance)	Product	Test Frequency (MHz)	Main Ingredients
	HSL300V2	300	Water, Sugar
	HSL450V2	450	Water, Sugar
	HSL750V2	750	Water, Sugar
	HSL900V2	835, 900	Water, Sugar
	HSL1450V2	1450, 1500, 1640	Water, DGBE
	HSL1750V2	1750	Water, DGBE
	HSL1800V2	1800, 1900	Water, DGBE
	HSL1900V2	1900	Water, DGBE
	HSL1950V2	1950, 2000	Water, DGBE
	HSL2450V2	2450, 2600	Water, DGBE
Broad-Band Solutions (±5% tolerance)	Product	Test Frequency (MHz)	Main Ingredients
	HBBL30-250V3	30-250	Water, Tween
	HBBL1350-1850V3	1400-1800	Water, Tween
	HBBL1550-1950V3	1750-1900	Water, Tween
	HBBL1900-3800V3	1950-3000	Water, Tween
	HBBL3500-5800V5	3500-5800	Water, Oil

Body Tissue Simulating Liquids

Body Tissue (Muscle)	Parameters according to FCC KDB 865664 D01		
Narrow-Band Solutions (±5% tolerance)	Product	Test Frequency (MHz)	Main Ingredients
	MSL300V2	300	Water, Sugar
	MSL450V2	400, 450	Water, Sugar
	MSL750V2	750	Water, Sugar
	MSL900V2	835, 900	Water, Sugar
	MSL1450V2	1450, 1500, 1640	Water, DGBE
	MSL1750V2	1750	Water, DGBE
	MSL1800V2	1800, 1900	Water, DGBE
	MSL1900V2	1900	Water, DGBE
	MSL1950V2	1950, 2100	Water, DGBE
	MSL2450V2	2450, 2600	Water, DGBE
Broad-Band Solutions (±5% tolerance)	Product	Test Frequency (MHz)	Main Ingredients
	MBBL130-250V3	130-250	Water, Tween
	MBBL1350-1850V3	1350-1800	Water, Tween
	MBBL1550-1950V3	1550-1850	Water, Tween
	MBBL1900-3800V3	1950-3800	Water, Tween
	MBBL3500-5800V5	3500-5800	Water, Oil

Zeughausstrasse 43, 8004 Zurich, Switzerland
 Phone +41 44 245 9700, Fax +41 44 245 9779
 info@speag.com, http://www.speag.com

Measurement Certificate / Material Test

Item Name **Head Tissue Simulating Liquid (HBBL1550-1950V3)**
 Product No. SL AAH 181 AA (Charge: 140916-1)
 Manufacturer SPEAG

Measurement Method

TSL dielectric parameters measured using calibrated OCP probe.

Setup Validation

Validation results were within $\pm 2.5\%$ towards the target values of Methanol.

Target Parameters

Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.



Test Condition

Ambient Environment temperatur (22 ± 3)°C and humidity < 70%.
 TSL Temperature 22°C
 Test Date 17-Sep-14
 Operator IEN

Additional Information

TSL Density 1.052 g/cm³
 TSL Heat-capacity 3.322 kJ/(kg*K)

f [MHz]	Measured			Target		Diff.to Target [%]	
	HP-e'	HP-e''	sigma	eps	sigma	Δ -eps	Δ -sigma
1500	41.0	13.22	1.10	40.4	1.23	1.3	-10.2
1525	40.9	13.26	1.12	40.4	1.24	1.1	-9.5
1550	40.8	13.29	1.15	40.4	1.26	1.0	-8.8
1575	40.7	13.32	1.17	40.3	1.27	0.8	-8.1
1600	40.6	13.35	1.19	40.3	1.28	0.6	-7.5
1625	40.4	13.40	1.21	40.3	1.30	0.4	-6.7
1650	40.3	13.46	1.24	40.2	1.31	0.3	-5.9
1675	40.2	13.48	1.26	40.2	1.33	0.1	-5.4
1700	40.1	13.50	1.28	40.2	1.34	-0.1	-4.9
1725	40.0	13.55	1.30	40.1	1.36	-0.2	-4.2
1750	39.9	13.59	1.32	40.1	1.37	-0.3	-3.5
1775	39.8	13.62	1.35	40.0	1.39	-0.5	-2.9
1800	39.7	13.65	1.37	40.0	1.40	-0.6	-2.4
1825	39.6	13.69	1.39	40.0	1.40	-0.9	-0.7
1850	39.6	13.74	1.41	40.0	1.40	-1.1	1.0
1875	39.5	13.77	1.44	40.0	1.40	-1.3	2.6
1900	39.4	13.79	1.46	40.0	1.40	-1.6	4.1
1925	39.3	13.84	1.48	40.0	1.40	-1.8	5.9
1950	39.2	13.88	1.51	40.0	1.40	-2.0	7.6
1975	39.1	13.91	1.53	40.0	1.40	-2.3	9.2
2000	39.0	13.94	1.55	40.0	1.40	-2.5	10.8

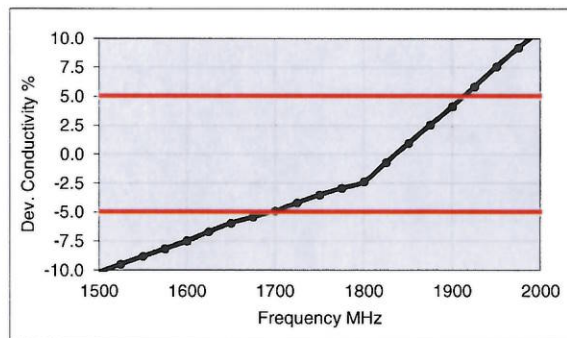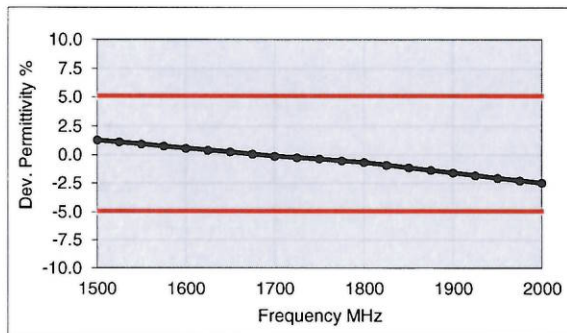

Zeughausstrasse 43, 8004 Zurich, Switzerland
 Phone +41 44 245 9700, Fax +41 44 245 9779
 info@speag.com, http://www.speag.com

Measurement Certificate / Material Test

Item Name **Head Tissue Simulating Liquid (HBBL1900-3800V3)**
 Product No. SL AAH 196 AB (Charge: 140729-2)
 Manufacturer SPEAG

Measurement Method

TSL dielectric parameters measured using calibrated OCP probe.

Setup Validation

Validation results were within $\pm 2.5\%$ towards the target values of Methanol.

Target Parameters

Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.

Test Condition

Ambient Environment temperatur (22 ± 3)°C and humidity < 70%.
 TSL Temperature 22°C
 Test Date 30-Jul-14
 Operator CL

Additional Information

TSL Density 1.054 g/cm³
 TSL Heat-capacity 3.389 kJ/(kg*K)

f [MHz]	Measured			Target		Diff.to Target [%]	
	HP-e'	HP-e''	sigma	eps	sigma	Δ-eps	Δ-sigma
1900	40.6	12.5	1.3	40.0	1.4	1.5	-5.6
1950	40.4	12.6	1.4	40.0	1.4	1.1	-2.1
2000	40.3	12.7	1.4	40.0	1.4	0.6	1.3
2050	40.1	12.9	1.5	39.9	1.4	0.5	1.6
2100	39.9	13.0	1.5	39.8	1.5	0.3	1.9
2150	39.8	13.1	1.6	39.7	1.5	0.1	2.0
2200	39.6	13.2	1.6	39.6	1.6	-0.2	2.6
2250	39.4	13.3	1.7	39.6	1.6	-0.3	2.9
2300	39.2	13.5	1.7	39.5	1.7	-0.6	3.4
2350	39.1	13.6	1.8	39.4	1.7	-0.8	3.9
2400	38.9	13.7	1.8	39.3	1.8	-1.0	4.5
2450	38.7	13.9	1.9	39.2	1.8	-1.3	4.9
2500	38.5	14.0	1.9	39.1	1.9	-1.6	4.8
2550	38.4	14.1	2.0	39.1	1.9	-1.8	4.8
2600	38.1	14.2	2.1	39.0	2.0	-2.2	4.7
2650	37.9	14.3	2.1	38.9	2.0	-2.6	4.6
2700	37.8	14.5	2.2	38.9	2.1	-2.9	4.7
2750	37.5	14.5	2.2	38.8	2.1	-3.3	4.5
2800	37.4	14.6	2.3	38.8	2.2	-3.6	4.5
2850	37.2	14.7	2.3	38.7	2.2	-3.9	4.5
2900	37.0	14.9	2.4	38.6	2.3	-4.2	4.6
2950	36.8	14.9	2.5	38.6	2.3	-4.5	4.5
3000	36.6	15.0	2.5	38.5	2.4	-4.9	4.3
3050	36.4	15.1	2.6	38.4	2.5	-5.2	4.6
3100	36.2	15.2	2.6	38.4	2.5	-5.6	4.6
3150	36.1	15.3	2.7	38.3	2.6	-5.9	4.8
3200	35.9	15.3	2.7	38.3	2.6	-6.3	4.7
3250	35.7	15.4	2.8	38.2	2.7	-6.6	4.8
3300	35.5	15.4	2.8	38.2	2.7	-6.9	4.7
3350	35.4	15.5	2.9	38.1	2.8	-7.2	4.9
3400	35.2	15.6	2.9	38.0	2.8	-7.5	4.8
3450	35.0	15.6	3.0	38.0	2.9	-7.8	4.9
3500	34.9	15.7	3.1	37.9	2.9	-8.1	4.9
3550	34.7	15.7	3.1	37.9	3.0	-8.4	4.9
3600	34.5	15.8	3.2	37.8	3.0	-8.7	5.1
3650	34.4	15.9	3.2	37.8	3.1	-9.0	5.0
3700	34.2	15.9	3.3	37.7	3.1	-9.3	5.2
3750	34.0	16.0	3.3	37.6	3.2	-9.6	5.0
3800	33.9	16.0	3.4	37.6	3.2	-9.9	5.3
3850	33.7	16.1	3.4	37.5	3.3	-10.1	5.2

