

FCC ID: A3LSMS908U

Part 0 Power Density Report  
Power Density Characterization  
Revision B

November 22, 2021

SAMSUNG ELECTRONICS

# Power Density Characterization


## 1 Exposure Scenarios

At frequencies > 6 GHz, the total peak spatial averaged power density (psPD) is required to be assessed for all antenna configurations (beams) from all mmW antenna modules installed inside the device. This device has 2 patch antenna arrays (M Patch, N Patch).

As showed in Figure 1, the surfaces near-by each mmW antenna module for PD characterization are identified and listed in Table 1.


**Table 1**  
**Evaluation Surfaces for PD Characterization**

Band/Mode	Antenna Module	Back	Front	Top	Bottom	Right	Left
NR n258	M	Yes	Yes	Yes	No	No	Yes
NR n258	N	Yes	Yes	No	No	Yes	No
NR n261	M	Yes	Yes	Yes	No	No	Yes
NR n261	N	Yes	Yes	No	No	Yes	No
NR n260	M	Yes	Yes	Yes	No	No	Yes
NR n260	N	Yes	Yes	No	No	Yes	No

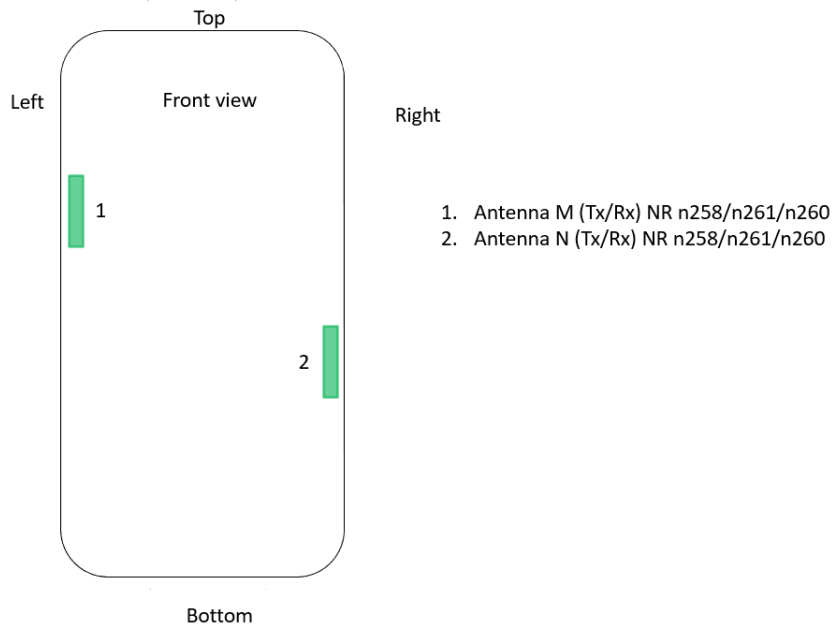

**Figure 1: Location of mmW antenna modules looking from front of the DUT**

## 2 Power Density Characterization Method

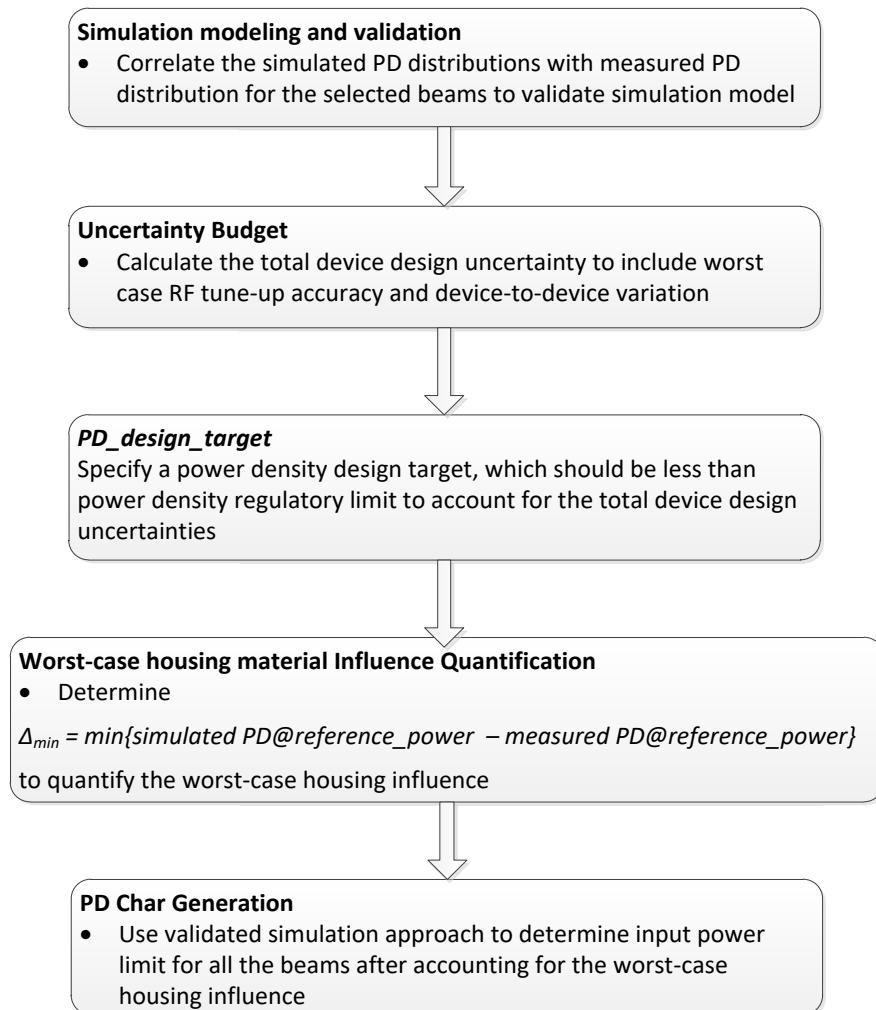

3 Codebook for all supported beams

**Table 2**  
**5G mmW NR Band n258 Ant M Codebook**

Band	Antenna Module	Antenna Type	Beam ID	Feed no.	Paired With
n258	M	Patch	0	1	128
n258	M	Patch	2	1	130
n258	M	Patch	4	1	132
n258	M	Patch	6	1	134
n258	M	Patch	8	1	136
n258	M	Patch	10	2	138
n258	M	Patch	11	2	139
n258	M	Patch	12	2	140
n258	M	Patch	13	2	141
n258	M	Patch	18	2	146
n258	M	Patch	19	2	147
n258	M	Patch	20	2	148
n258	M	Patch	24	5	152
n258	M	Patch	25	5	153
n258	M	Patch	26	5	154
n258	M	Patch	27	5	155
n258	M	Patch	28	5	156
n258	M	Patch	34	5	162
n258	M	Patch	35	5	163
n258	M	Patch	36	5	164
n258	M	Patch	37	5	165
n258	M	Patch	128	1	0
n258	M	Patch	130	1	2
n258	M	Patch	132	1	4
n258	M	Patch	134	1	6
n258	M	Patch	136	1	8
n258	M	Patch	138	2	10
n258	M	Patch	139	2	11
n258	M	Patch	140	2	12
n258	M	Patch	141	2	13
n258	M	Patch	146	2	18
n258	M	Patch	147	2	19
n258	M	Patch	148	2	20
n258	M	Patch	152	5	24
n258	M	Patch	153	5	25
n258	M	Patch	154	5	26
n258	M	Patch	155	5	27
n258	M	Patch	156	5	28
n258	M	Patch	162	5	34
n258	M	Patch	163	5	35
n258	M	Patch	164	5	36
n258	M	Patch	165	5	37

**Table 3**  
**5G mmW NR Band n258 Ant N Codebook**

Band	Antenna Module	Antenna Type	Beam ID	Feed no.	Paired With
n258	N	Patch	1	1	129
n258	N	Patch	3	1	131
n258	N	Patch	5	1	133
n258	N	Patch	7	1	135
n258	N	Patch	9	1	137
n258	N	Patch	14	2	142
n258	N	Patch	15	2	143
n258	N	Patch	16	2	144
n258	N	Patch	17	2	145
n258	N	Patch	21	2	149
n258	N	Patch	22	2	150
n258	N	Patch	23	2	151
n258	N	Patch	29	5	157
n258	N	Patch	30	5	158
n258	N	Patch	31	5	159
n258	N	Patch	32	5	160
n258	N	Patch	33	5	161
n258	N	Patch	38	5	166
n258	N	Patch	39	5	167
n258	N	Patch	40	5	168
n258	N	Patch	41	5	169
n258	N	Patch	129	1	1
n258	N	Patch	131	1	3
n258	N	Patch	133	1	5
n258	N	Patch	135	1	7
n258	N	Patch	137	1	9
n258	N	Patch	142	2	14
n258	N	Patch	143	2	15
n258	N	Patch	144	2	16
n258	N	Patch	145	2	17
n258	N	Patch	149	2	21
n258	N	Patch	150	2	22
n258	N	Patch	151	2	23
n258	N	Patch	157	5	29
n258	N	Patch	158	5	30
n258	N	Patch	159	5	31
n258	N	Patch	160	5	32
n258	N	Patch	161	5	33
n258	N	Patch	166	5	38
n258	N	Patch	167	5	39
n258	N	Patch	168	5	40
n258	N	Patch	169	5	41

**Table 4**  
**5G mmW NR Band n261 Ant M Codebook**

Band	Antenna Module	Antenna Type	Beam ID	Feed no.	Paired With
n261	M	Patch	0	1	128
n261	M	Patch	2	1	130
n261	M	Patch	4	1	132
n261	M	Patch	6	1	134
n261	M	Patch	8	1	136
n261	M	Patch	10	2	138
n261	M	Patch	11	2	139
n261	M	Patch	12	2	140
n261	M	Patch	13	2	141
n261	M	Patch	18	2	146
n261	M	Patch	19	2	147
n261	M	Patch	20	2	148
n261	M	Patch	24	5	152
n261	M	Patch	25	5	153
n261	M	Patch	26	5	154
n261	M	Patch	27	5	155
n261	M	Patch	28	5	156
n261	M	Patch	34	5	162
n261	M	Patch	35	5	163
n261	M	Patch	36	5	164
n261	M	Patch	37	5	165
n261	M	Patch	128	1	0
n261	M	Patch	130	1	2
n261	M	Patch	132	1	4
n261	M	Patch	134	1	6
n261	M	Patch	136	1	8
n261	M	Patch	138	2	10
n261	M	Patch	139	2	11
n261	M	Patch	140	2	12
n261	M	Patch	141	2	13
n261	M	Patch	146	2	18
n261	M	Patch	147	2	19
n261	M	Patch	148	2	20
n261	M	Patch	152	5	24
n261	M	Patch	153	5	25
n261	M	Patch	154	5	26
n261	M	Patch	155	5	27
n261	M	Patch	156	5	28
n261	M	Patch	162	5	34
n261	M	Patch	163	5	35
n261	M	Patch	164	5	36
n261	M	Patch	165	5	37

**Table 5**  
**5G mmW NR Band n261 Ant N Codebook**

Band	Antenna Module	Antenna Type	Beam ID	Feed no.	Paired With
n261	N	Patch	1	1	129
n261	N	Patch	3	1	131
n261	N	Patch	5	1	133
n261	N	Patch	7	1	135
n261	N	Patch	9	1	137
n261	N	Patch	14	2	142
n261	N	Patch	15	2	143
n261	N	Patch	16	2	144
n261	N	Patch	17	2	145
n261	N	Patch	21	2	149
n261	N	Patch	22	2	150
n261	N	Patch	23	2	151
n261	N	Patch	29	5	157
n261	N	Patch	30	5	158
n261	N	Patch	31	5	159
n261	N	Patch	32	5	160
n261	N	Patch	33	5	161
n261	N	Patch	38	5	166
n261	N	Patch	39	5	167
n261	N	Patch	40	5	168
n261	N	Patch	41	5	169
n261	N	Patch	129	1	1
n261	N	Patch	131	1	3
n261	N	Patch	133	1	5
n261	N	Patch	135	1	7
n261	N	Patch	137	1	9
n261	N	Patch	142	2	14
n261	N	Patch	143	2	15
n261	N	Patch	144	2	16
n261	N	Patch	145	2	17
n261	N	Patch	149	2	21
n261	N	Patch	150	2	22
n261	N	Patch	151	2	23
n261	N	Patch	157	5	29
n261	N	Patch	158	5	30
n261	N	Patch	159	5	31
n261	N	Patch	160	5	32
n261	N	Patch	161	5	33
n261	N	Patch	166	5	38
n261	N	Patch	167	5	39
n261	N	Patch	168	5	40
n261	N	Patch	169	5	41

**Table 6**  
**5G mmW NR Band n260 Ant M Codebook**

Band	Antenna Module	Antenna Type	Beam ID	Feed no.	Paired With
n260	M	Patch	0	1	128
n260	M	Patch	2	1	130
n260	M	Patch	4	1	132
n260	M	Patch	6	1	134
n260	M	Patch	8	1	136
n260	M	Patch	10	2	138
n260	M	Patch	11	2	139
n260	M	Patch	12	2	140
n260	M	Patch	13	2	141
n260	M	Patch	18	2	146
n260	M	Patch	19	2	147
n260	M	Patch	20	2	148
n260	M	Patch	24	5	152
n260	M	Patch	25	5	153
n260	M	Patch	26	5	154
n260	M	Patch	27	5	155
n260	M	Patch	28	5	156
n260	M	Patch	34	5	162
n260	M	Patch	35	5	163
n260	M	Patch	36	5	164
n260	M	Patch	37	5	165
n260	M	Patch	128	1	0
n260	M	Patch	130	1	2
n260	M	Patch	132	1	4
n260	M	Patch	134	1	6
n260	M	Patch	136	1	8
n260	M	Patch	138	2	10
n260	M	Patch	139	2	11
n260	M	Patch	140	2	12
n260	M	Patch	141	2	13
n260	M	Patch	146	2	18
n260	M	Patch	147	2	19
n260	M	Patch	148	2	20
n260	M	Patch	152	5	24
n260	M	Patch	153	5	25
n260	M	Patch	154	5	26
n260	M	Patch	155	5	27
n260	M	Patch	156	5	28
n260	M	Patch	162	5	34
n260	M	Patch	163	5	35
n260	M	Patch	164	5	36
n260	M	Patch	165	5	37



**Table 7**  
**5G mmW NR Band n260 Ant N Codebook**

Band	Antenna Module	Antenna Type	Beam ID	Feed no.	Paired With
n260	N	Patch	1	1	129
n260	N	Patch	3	1	131
n260	N	Patch	5	1	133
n260	N	Patch	7	1	135
n260	N	Patch	9	1	137
n260	N	Patch	14	2	142
n260	N	Patch	15	2	143
n260	N	Patch	16	2	144
n260	N	Patch	17	2	145
n260	N	Patch	21	2	149
n260	N	Patch	22	2	150
n260	N	Patch	23	2	151
n260	N	Patch	29	5	157
n260	N	Patch	30	5	158
n260	N	Patch	31	5	159
n260	N	Patch	32	5	160
n260	N	Patch	33	5	161
n260	N	Patch	38	5	166
n260	N	Patch	39	5	167
n260	N	Patch	40	5	168
n260	N	Patch	41	5	169
n260	N	Patch	129	1	1
n260	N	Patch	131	1	3
n260	N	Patch	133	1	5
n260	N	Patch	135	1	7
n260	N	Patch	137	1	9
n260	N	Patch	142	2	14
n260	N	Patch	143	2	15
n260	N	Patch	144	2	16
n260	N	Patch	145	2	17
n260	N	Patch	149	2	21
n260	N	Patch	150	2	22
n260	N	Patch	151	2	23
n260	N	Patch	157	5	29
n260	N	Patch	158	5	30
n260	N	Patch	159	5	31
n260	N	Patch	160	5	32
n260	N	Patch	161	5	33
n260	N	Patch	166	5	38
n260	N	Patch	167	5	39
n260	N	Patch	168	5	40
n260	N	Patch	169	5	41

#### 4 Simulation and Modeling Validation

Power density simulations of all beams and surfaces were performed. Details of these simulations and modeling validation can be found in the Power Density Simulation Report. Table below includes a summary of the validation results to support worst-case housing influence quantification in power density characterization for this model.

With an input power of 6 dBm for n258 band, 6 dBm for n261 band, and 6 dBm for n260 band, PD measurements are conducted for at least one single beam per antenna module on worst-surface(s). PD measurements are performed at mid channel of each mmW band and with CW modulation. All measured PD values are listed in table below along with corresponding simulated PD values for the same configuration.

PD value will be used to determine worst-case housing influence for conservative assessment.

**Table 8**

Band	Antenna	Beam ID	Surface	4cm <sup>2</sup> psPD		Delta = Simulated - Measured
				Measured	Simulated	
				(mW/cm <sup>2</sup> )		(dB)
n258	M	37	Back	0.758	1.528	<b>3.04</b>
		28	Left	0.32	0.936	4.66
		162	Back	0.99	2.228	3.52
			Left	0.617	1.48	3.80
	N	32	Back	0.387	0.781	3.05
		40	Right	0.763	1.668	3.40
		157	Back	0.59	0.747	<b>1.02</b>
		167	Right	0.366	0.546	1.74
n261	M	37	Back	0.956	1.720	<b>2.55</b>
		27	Left	0.540	1.289	3.78
		165	Back	1.050	2.263	3.33
		156	Left	0.632	1.589	4.00
	N	40	Back	0.432	1.036	3.80
		29	Right	0.901	1.669	2.68
		161	Back	0.322	0.580	<b>2.56</b>
Right	0.260		0.595	3.60		
n260	M	28	Back	0.382	1.185	4.92
		155	Back	0.476	1.036	3.38
		156	Left	0.441	0.843	<b>2.81</b>
	N	40	Back	0.308	0.687	3.48
		31	Right	0.753	1.331	<b>2.47</b>
		167	Back	0.230	0.608	4.22
		166	Right	0.426	0.934	3.41
Front	0.291		0.640	3.42		

## 5 PD\_design\_target

**Table 9**

<b>PD_design_target</b>	
$PD\_design\_target < PD\_regulatory\_limit \times 10^{\frac{-Total\ Uncertainty}{10}}$	
<b>psPD over 4 cm<sup>2</sup> Averaging Area (mW/cm<sup>2</sup>)</b>	
Total Uncertainty	2.0 dB
PD_regulatory_limit	1.0 mW/cm <sup>2</sup>
PD_design_target	0.631 mW/cm <sup>2</sup>

## 6 Δmin

For non-metal material, the material property cannot be accurately characterized at mmW frequencies to date. The estimated material property for the device housing is used in the simulation model, which could influence the accuracy in simulation for PD amplitude quantification. Since the housing influence on PD could vary from surface to surface where the EM field propagates through, the most underestimated surface is used to quantify the worst-case housing influence for conservative assessment.

Since the mmW antenna modules are placed at different locations, only surrounding material/housing has impact on EM field propagation, and in turn power density. Furthermore, depending on the type of antenna array, i.e., dipole antenna array or patch antenna array, the nature of EM field propagation in the near field is different. Therefore, the worst-case housing influence is determined per antenna module and per antenna type.

For this DUT, the below procedure was used to determine worst-case housing influence, Δmin:

1. Based on PD simulation, for each module and antenna type, determine one or more worst-surface(s) that has highest 4cm<sup>2</sup> PD for all the single beams per antenna module and per antenna type in the mid channel of each band.
2. For identified worst surface(s) per antenna module and per antenna type group,
  - a. First determine Δmin based on identified worst surface(s), and derive input.power.limit
  - b. Then prove all other near-by surface(s), i.e., non-selected surface(s), is not required for housing material loss quantification (in other words, these non-evaluated surfaces have no influence on the determined input.power.limit) by:

- i. re-scale all simulated 4cm<sup>2</sup> PD values to input.power.limit to identify the worst-PD beam per each non-evaluated surface
  - ii. Measure 4cm<sup>2</sup> PD at input.power.limit on identified worst-PD beam per each non-evaluated surface
  - iii. Demonstrate all measured 4cm<sup>2</sup> PD values are below PD\_design\_target
3. If any of the above surface(s) in Step (2.b.iii) have measured 4cm<sup>2</sup> PD  $\geq$  PD\_design\_target, then those surfaces must be included in the  $\Delta_{min}$  determination in Step (2.a), and re-evaluate input.power.limit with these added surfaces.

Following above procedure, based on the Samsung PD simulation report, the worst-surface(s) having highest 4cm<sup>2</sup> PD for all the single beams per each antenna type and each antenna module group in the mid channel of n258, n261, and n260 bands are identified in the following table:

**Table 10**

**Worst-surface(s) for Ant M, Ant N**

Antenna Module	Antenna Type	Back (S2)	Front (S1)	Top (S5)	Bottom (S6)	Right (S4)	Left (S3)
<b>M</b>	<b>Patch</b>	Yes	No	No	No	No	Yes
<b>N</b>	<b>Patch</b>	Yes	No	No	No	Yes	No

Thus, when comparing a simulated 4cm<sup>2</sup>-averaged PD and measured 4 cm<sup>2</sup>-averaged PD for the identified worst surface(s), the worst error introduced for each antenna type and each antenna module group when using the estimated material property in the simulation is highlighted in bold numbers in the table below. Thus, the worst-case housing influence, denoted as  $\Delta_{min} = \text{Sim. PD} - \text{Meas. PD}$ , is determined as

**Table 11**  
 **$\Delta_{min}$  for Ant M, Ant N**

Band	Antenna	$\Delta_{min}$ (dB)
n258	M	<b>3.04</b>
	N	<b>1.02</b>
n261	M	<b>2.55</b>
	N	<b>2.56</b>
n260	M	<b>2.81</b>
	N	<b>2.47</b>

$\Delta_{min}$  represents the worst case where RF exposure is underestimated the most in simulation when using the estimated material property of the housing. For conservative assessment, the  $\Delta_{min}$  is used as the worst-case factor and applied to all the beams in the corresponding antenna type and antenna module group to determine input power limits in PD char for compliance.

The detail input.power.limit derivation is described in Section 7.

Simulated 4cm<sup>2</sup> PD values in the Power Density Simulation Report are scaled to input.power.limit and are listed in the tables below for all single beams for all identified surfaces, when assuming the simulation is performed with correct housing influence.

Determine the worst beam for each of non-selected surface(s), identified in the table below:

**Table 12**

**Non-Selected Surface(s) for Ant M, Ant N**

Antenna Module	Antenna Type	Band	Back (S2)	Front (S1)	Top (S5)	Bottom (S6)	Right (S4)	Left (S3)
<b>M</b>	<b>Patch</b>	<b>n258</b>	No	Yes	Yes	No	No	No
<b>M</b>	<b>Patch</b>	<b>n261</b>	No	Yes	Yes	No	No	No
<b>M</b>	<b>Patch</b>	<b>n260</b>	No	Yes	Yes	No	No	Yes
<b>N</b>	<b>Patch</b>	<b>n258</b>	No	Yes	No	No	No	No
<b>N</b>	<b>Patch</b>	<b>n261</b>	No	Yes	No	No	No	No
<b>N</b>	<b>Patch</b>	<b>n260</b>	No	Yes	No	No	No	No

Then perform PD measurement for all determined worst-case beams, highlighted in orange in the tables below, on the corresponding surface. Measurement is performed in the mid channel of each band with CW modulation. The evaluation distance is at 2 mm.

**Table 13**  
**n258/mid channel, Antenna M Patch simulated 4cm2 PD at PD\_Design\_Target**  
**(if simulation performed with correct housing material properties) ( $\Delta_{min}$ )**

Antenna	Beam ID_1	Simulated 4cm <sup>2</sup> PD (mW/cm <sup>2</sup> ) Corresponding to PD_design_target if the simulation was performed with correct No. Module Type housing material properties					
		S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Back)
M	0	0.012	0.491	0.021	0.003	0.191	0.573
M	2	0.020	0.313	0.020	0.003	0.038	0.608
M	4	0.015	0.215	0.015	0.004	0.027	0.587
M	6	0.015	0.130	0.030	0.002	0.030	0.607
M	8	0.016	0.261	0.041	0.002	0.030	0.610
M	10	0.019	0.362	0.048	0.006	0.095	0.618
M	11	0.020	0.295	0.038	0.003	0.092	0.548
M	12	0.017	0.224	0.008	0.004	0.022	0.590
M	13	0.020	0.451	0.008	0.003	0.113	0.598
M	18	0.012	0.244	0.056	0.004	0.029	0.585
M	19	0.016	0.332	0.031	0.002	0.067	0.566
M	20	0.011	0.254	0.009	0.002	0.012	0.577
M	24	0.023	0.230	0.099	0.013	0.211	0.570
M	25	0.016	0.290	0.055	0.001	0.023	0.591
M	26	0.028	0.235	0.016	0.001	0.029	0.587
M	27	0.020	0.297	0.006	0.001	0.022	0.593
M	28	0.016	0.371	0.013	0.003	0.045	0.603
M	34	0.014	0.258	0.078	0.005	0.103	0.568
M	35	0.034	0.272	0.032	0.002	0.035	0.570
M	36	0.019	0.257	0.009	0.000	0.028	0.591
M	37	0.022	0.322	0.009	0.002	0.029	0.600
M	128	0.003	0.271	0.022	0.002	0.049	0.573
M	130	0.003	0.303	0.026	0.005	0.022	0.600
M	132	0.006	0.419	0.040	0.004	0.042	0.631
M	134	0.006	0.424	0.047	0.006	0.053	0.561
M	136	0.004	0.331	0.055	0.004	0.029	0.559
M	138	0.006	0.382	0.076	0.010	0.044	0.615
M	139	0.002	0.348	0.027	0.001	0.046	0.576
M	140	0.004	0.378	0.008	0.003	0.027	0.623
M	141	0.006	0.327	0.013	0.006	0.037	0.596
M	146	0.005	0.403	0.088	0.002	0.039	0.606
M	147	0.002	0.349	0.012	0.001	0.046	0.574
M	148	0.006	0.486	0.005	0.006	0.055	0.631
M	152	0.005	0.424	0.144	0.002	0.049	0.631
M	153	0.005	0.371	0.043	0.001	0.025	0.570
M	154	0.008	0.436	0.009	0.001	0.057	0.573
M	155	0.005	0.409	0.008	0.001	0.042	0.592
M	156	0.004	0.391	0.005	0.004	0.034	0.604
M	162	0.003	0.419	0.112	0.001	0.021	0.631
M	163	0.007	0.428	0.011	0.001	0.050	0.584
M	164	0.008	0.450	0.006	0.002	0.058	0.601
M	165	0.004	0.389	0.007	0.002	0.036	0.590

**Table 14**  
**n258/mid channel, Antenna N Patch simulated 4cm2 PD at PD\_Design\_Target**  
**(if simulation performed with correct housing material properties) ( $\Delta_{min}$ )**

Antenna	Beam ID_1	Simulated 4cm <sup>2</sup> PD (mW/cm <sup>2</sup> ) Corresponding to PD_design_target if the simulation was performed with correct No. Module Type housing material properties					
		S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Back)
N	1	0.597	0.004	0.004	0.021	0.198	0.356
N	3	0.593	0.003	0.002	0.010	0.184	0.218
N	5	0.601	0.006	0.002	0.009	0.171	0.193
N	7	0.604	0.006	0.002	0.012	0.217	0.169
N	9	0.631	0.005	0.005	0.012	0.206	0.335
N	14	0.615	0.007	0.003	0.036	0.191	0.393
N	15	0.589	0.008	0.004	0.024	0.222	0.366
N	16	0.631	0.004	0.001	0.010	0.269	0.275
N	17	0.631	0.003	0.001	0.004	0.233	0.288
N	21	0.629	0.002	0.004	0.004	0.235	0.273
N	22	0.584	0.005	0.002	0.011	0.232	0.324
N	23	0.631	0.003	0.001	0.003	0.233	0.293
N	29	0.622	0.016	0.009	0.059	0.179	0.446
N	30	0.599	0.013	0.009	0.031	0.200	0.323
N	31	0.573	0.003	0.001	0.005	0.234	0.241
N	32	0.631	0.005	0.001	0.007	0.225	0.358
N	33	0.621	0.009	0.002	0.008	0.259	0.314
N	38	0.631	0.020	0.011	0.063	0.163	0.458
N	39	0.550	0.004	0.004	0.008	0.200	0.248
N	40	0.612	0.005	0.001	0.005	0.247	0.268
N	41	0.609	0.007	0.002	0.005	0.225	0.339
N	129	0.382	0.008	0.004	0.012	0.108	0.506
N	131	0.339	0.008	0.004	0.021	0.059	0.462
N	133	0.434	0.015	0.005	0.020	0.113	0.513
N	135	0.379	0.010	0.005	0.019	0.087	0.495
N	137	0.307	0.006	0.003	0.016	0.058	0.547
N	142	0.371	0.005	0.003	0.005	0.062	0.472
N	143	0.361	0.006	0.000	0.012	0.078	0.532
N	144	0.376	0.009	0.000	0.009	0.087	0.498
N	145	0.376	0.014	0.009	0.041	0.159	0.509
N	149	0.336	0.007	0.001	0.003	0.060	0.513
N	150	0.375	0.005	0.002	0.003	0.084	0.513
N	151	0.380	0.014	0.003	0.036	0.092	0.483
N	157	0.361	0.007	0.002	0.003	0.077	0.501
N	158	0.375	0.008	0.001	0.007	0.080	0.484
N	159	0.411	0.013	0.002	0.006	0.109	0.535
N	160	0.365	0.015	0.002	0.027	0.095	0.498
N	161	0.382	0.007	0.003	0.062	0.138	0.491
N	166	0.367	0.007	0.001	0.003	0.080	0.495
N	167	0.411	0.009	0.001	0.004	0.099	0.510
N	168	0.383	0.013	0.002	0.013	0.107	0.551
N	169	0.371	0.014	0.002	0.035	0.105	0.498

**Table 15**  
**n261/mid channel, Antenna M Patch simulated 4cm2 PD at PD\_Design\_Target**  
**(if simulation performed with correct housing material properties) ( $\Delta_{min}$ )**

Antenna	Beam ID_1	Simulated 4cm <sup>2</sup> PD (mW/cm <sup>2</sup> ) Corresponding to PD_design_target if the simulation was performed with correct No. Module Type housing material properties					
		S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Back)
M	0	0.015	0.401	0.013	0.003	0.097	0.570
M	2	0.012	0.311	0.020	0.002	0.030	0.631
M	4	0.014	0.379	0.025	0.002	0.028	0.603
M	6	0.012	0.328	0.025	0.005	0.054	0.631
M	8	0.006	0.381	0.038	0.002	0.064	0.577
M	10	0.020	0.323	0.051	0.003	0.040	0.604
M	11	0.012	0.371	0.022	0.001	0.031	0.631
M	12	0.017	0.408	0.006	0.001	0.055	0.603
M	13	0.021	0.421	0.012	0.002	0.069	0.612
M	18	0.018	0.319	0.029	0.001	0.050	0.605
M	19	0.009	0.395	0.009	0.001	0.024	0.628
M	20	0.010	0.395	0.044	0.006	0.031	0.631
M	24	0.012	0.382	0.087	0.002	0.049	0.595
M	25	0.015	0.348	0.027	0.001	0.026	0.575
M	26	0.013	0.414	0.012	0.001	0.048	0.621
M	27	0.007	0.491	0.009	0.001	0.042	0.631
M	28	0.007	0.444	0.012	0.007	0.034	0.614
M	34	0.013	0.354	0.052	0.001	0.026	0.576
M	35	0.020	0.357	0.011	0.001	0.052	0.584
M	36	0.012	0.444	0.010	0.001	0.046	0.605
M	37	0.004	0.462	0.010	0.003	0.027	0.631
M	128	0.003	0.291	0.016	0.005	0.022	0.604
M	130	0.003	0.332	0.015	0.006	0.017	0.625
M	132	0.003	0.380	0.021	0.003	0.036	0.631
M	134	0.003	0.376	0.019	0.002	0.017	0.614
M	136	0.002	0.390	0.035	0.002	0.020	0.625
M	138	0.004	0.348	0.024	0.005	0.016	0.626
M	139	0.004	0.346	0.007	0.001	0.018	0.627
M	140	0.002	0.410	0.002	0.002	0.021	0.625
M	141	0.003	0.401	0.022	0.010	0.028	0.607
M	146	0.004	0.344	0.015	0.002	0.015	0.627
M	147	0.004	0.350	0.004	0.001	0.021	0.625
M	148	0.004	0.383	0.012	0.007	0.022	0.614
M	152	0.003	0.346	0.061	0.001	0.020	0.597
M	153	0.002	0.462	0.024	0.000	0.012	0.631
M	154	0.003	0.445	0.003	0.000	0.022	0.630
M	155	0.003	0.435	0.005	0.001	0.030	0.631
M	156	0.005	0.454	0.006	0.010	0.055	0.631
M	162	0.003	0.408	0.051	0.001	0.017	0.626
M	163	0.003	0.456	0.006	0.000	0.014	0.631
M	164	0.003	0.453	0.004	0.001	0.032	0.631
M	165	0.005	0.392	0.003	0.002	0.031	0.628



**Table 16**  
**n261/mid channel, Antenna N Patch simulated 4cm2 PD at PD\_Design\_Target**  
**(if simulation performed with correct housing material properties) ( $\Delta$ min)**

Antenna	Beam ID_1	Simulated 4cm <sup>2</sup> PD (mW/cm <sup>2</sup> ) Corresponding to PD_design_target if the simulation was performed with correct No. Module Type housing material properties					
		S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Back)
N	1	0.582	0.005	0.005	0.009	0.165	0.349
N	3	0.605	0.007	0.004	0.018	0.132	0.314
N	5	0.534	0.004	0.002	0.012	0.120	0.254
N	7	0.598	0.004	0.004	0.006	0.108	0.375
N	9	0.596	0.004	0.004	0.012	0.166	0.287
N	14	0.586	0.003	0.005	0.020	0.210	0.205
N	15	0.610	0.006	0.001	0.010	0.148	0.416
N	16	0.536	0.006	0.002	0.012	0.157	0.358
N	17	0.555	0.004	0.007	0.019	0.154	0.265
N	21	0.615	0.004	0.002	0.013	0.172	0.364
N	22	0.599	0.008	0.003	0.004	0.160	0.493
N	23	0.601	0.004	0.006	0.013	0.202	0.227
N	29	0.631	0.003	0.003	0.026	0.248	0.217
N	30	0.554	0.008	0.001	0.005	0.196	0.392
N	31	0.621	0.011	0.002	0.006	0.147	0.590
N	32	0.490	0.008	0.002	0.005	0.210	0.299
N	33	0.568	0.002	0.011	0.009	0.208	0.213
N	38	0.601	0.005	0.003	0.019	0.232	0.226
N	39	0.611	0.011	0.002	0.007	0.156	0.567
N	40	0.593	0.009	0.003	0.005	0.170	0.538
N	41	0.521	0.005	0.004	0.010	0.220	0.205
N	129	0.433	0.010	0.005	0.020	0.117	0.631
N	131	0.625	0.013	0.013	0.019	0.196	0.385
N	133	0.602	0.011	0.017	0.017	0.138	0.419
N	135	0.614	0.011	0.006	0.017	0.188	0.387
N	137	0.610	0.021	0.014	0.035	0.234	0.489
N	142	0.452	0.013	0.013	0.028	0.195	0.631
N	143	0.608	0.010	0.005	0.010	0.201	0.382
N	144	0.611	0.009	0.011	0.026	0.199	0.406
N	145	0.603	0.007	0.014	0.032	0.208	0.631
N	149	0.607	0.012	0.012	0.027	0.209	0.373
N	150	0.616	0.010	0.005	0.007	0.191	0.399
N	151	0.557	0.013	0.016	0.021	0.132	0.422
N	157	0.432	0.016	0.011	0.016	0.166	0.631
N	158	0.631	0.014	0.006	0.008	0.207	0.463
N	159	0.625	0.016	0.002	0.007	0.216	0.419
N	160	0.593	0.012	0.005	0.019	0.187	0.479
N	161	0.592	0.011	0.020	0.008	0.194	0.577
N	166	0.619	0.019	0.012	0.016	0.209	0.624
N	167	0.626	0.015	0.002	0.006	0.212	0.411
N	168	0.614	0.016	0.003	0.008	0.209	0.404
N	169	0.631	0.006	0.014	0.015	0.165	0.541

**Table 17**  
**n260/mid channel, Antenna M Patch simulated 4cm2 PD at PD\_Design\_Target**  
**(if simulation performed with correct housing material properties) ( $\Delta$ min)**

Antenna	Beam ID_1	Simulated 4cm <sup>2</sup> PD (mW/cm <sup>2</sup> ) Corresponding to PD_design_target if the simulation was performed with correct No. Module Type housing material properties					
		S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Back)
M	0	0.009	0.258	0.018	0.002	0.032	0.551
M	2	0.012	0.228	0.022	0.002	0.022	0.524
M	4	0.009	0.165	0.037	0.002	0.027	0.512
M	6	0.007	0.248	0.038	0.002	0.043	0.548
M	8	0.011	0.224	0.056	0.002	0.022	0.592
M	10	0.008	0.178	0.047	0.006	0.030	0.532
M	11	0.013	0.268	0.013	0.003	0.035	0.548
M	12	0.010	0.194	0.048	0.001	0.029	0.487
M	13	0.009	0.207	0.029	0.002	0.017	0.546
M	18	0.007	0.227	0.039	0.004	0.041	0.568
M	19	0.011	0.206	0.043	0.001	0.024	0.519
M	20	0.007	0.183	0.052	0.002	0.030	0.510
M	24	0.012	0.251	0.084	0.006	0.045	0.592
M	25	0.014	0.289	0.018	0.003	0.067	0.542
M	26	0.026	0.262	0.020	0.001	0.025	0.573
M	27	0.011	0.229	0.072	0.001	0.024	0.456
M	28	0.009	0.233	0.092	0.003	0.023	0.617
M	34	0.012	0.272	0.049	0.005	0.069	0.586
M	35	0.022	0.289	0.011	0.002	0.040	0.586
M	36	0.023	0.228	0.048	0.001	0.024	0.467
M	37	0.011	0.229	0.075	0.002	0.020	0.573
M	128	0.006	0.564	0.015	0.003	0.090	0.631
M	130	0.006	0.378	0.022	0.006	0.077	0.621
M	132	0.008	0.246	0.024	0.003	0.029	0.586
M	134	0.006	0.324	0.023	0.003	0.064	0.619
M	136	0.010	0.466	0.032	0.003	0.095	0.631
M	138	0.006	0.494	0.018	0.006	0.076	0.545
M	139	0.006	0.314	0.019	0.002	0.070	0.631
M	140	0.007	0.288	0.034	0.004	0.048	0.611
M	141	0.005	0.306	0.036	0.005	0.051	0.528
M	146	0.008	0.377	0.015	0.006	0.068	0.584
M	147	0.006	0.286	0.019	0.002	0.056	0.631
M	148	0.005	0.303	0.034	0.004	0.046	0.599
M	152	0.008	0.448	0.055	0.010	0.112	0.581
M	153	0.008	0.396	0.014	0.003	0.078	0.631
M	154	0.011	0.323	0.011	0.001	0.064	0.631
M	155	0.007	0.409	0.016	0.001	0.107	0.631
M	156	0.008	0.466	0.046	0.004	0.082	0.535
M	162	0.007	0.453	0.025	0.006	0.089	0.631
M	163	0.011	0.239	0.013	0.003	0.055	0.631
M	164	0.011	0.411	0.014	0.001	0.101	0.631
M	165	0.007	0.426	0.031	0.001	0.101	0.631

**Table 18**  
**n260/mid channel, Antenna N Patch simulated 4cm2 PD at PD\_Design\_Target**  
**(if simulation performed with correct housing material properties) ( $\Delta$ min)**

Antenna	Beam ID_1	Simulated 4cm <sup>2</sup> PD (mW/cm <sup>2</sup> ) Corresponding to PD_design_target if the simulation was performed with correct No. Module Type housing material properties					
		S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Back)
N	1	0.595	0.004	0.002	0.010	0.208	0.195
N	3	0.631	0.002	0.002	0.020	0.175	0.216
N	5	0.613	0.004	0.002	0.020	0.163	0.232
N	7	0.584	0.006	0.002	0.019	0.161	0.210
N	9	0.607	0.004	0.002	0.015	0.217	0.215
N	14	0.631	0.005	0.003	0.031	0.185	0.229
N	15	0.600	0.005	0.001	0.019	0.243	0.293
N	16	0.540	0.006	0.002	0.006	0.170	0.261
N	17	0.577	0.009	0.005	0.018	0.187	0.196
N	21	0.631	0.003	0.002	0.028	0.199	0.244
N	22	0.583	0.004	0.001	0.010	0.202	0.304
N	23	0.537	0.009	0.004	0.013	0.176	0.206
N	29	0.573	0.004	0.003	0.052	0.217	0.239
N	30	0.631	0.004	0.002	0.032	0.239	0.264
N	31	0.631	0.002	0.002	0.004	0.246	0.308
N	32	0.532	0.005	0.002	0.004	0.193	0.256
N	33	0.571	0.013	0.008	0.025	0.207	0.193
N	38	0.631	0.004	0.001	0.048	0.221	0.284
N	39	0.631	0.004	0.002	0.016	0.259	0.272
N	40	0.580	0.003	0.002	0.005	0.208	0.314
N	41	0.488	0.009	0.003	0.007	0.201	0.212
N	129	0.631	0.007	0.007	0.011	0.478	0.228
N	131	0.554	0.006	0.014	0.009	0.344	0.233
N	133	0.631	0.006	0.003	0.018	0.302	0.248
N	135	0.564	0.008	0.005	0.011	0.345	0.222
N	137	0.600	0.011	0.006	0.014	0.384	0.224
N	142	0.592	0.008	0.006	0.019	0.329	0.222
N	143	0.584	0.008	0.004	0.008	0.275	0.289
N	144	0.523	0.010	0.003	0.006	0.311	0.269
N	145	0.544	0.006	0.018	0.015	0.340	0.193
N	149	0.602	0.014	0.004	0.019	0.366	0.226
N	150	0.631	0.009	0.012	0.009	0.478	0.264
N	151	0.568	0.008	0.021	0.013	0.362	0.196
N	157	0.631	0.007	0.004	0.030	0.370	0.249
N	158	0.518	0.016	0.002	0.012	0.371	0.245
N	159	0.631	0.011	0.004	0.005	0.325	0.420
N	160	0.538	0.015	0.004	0.009	0.409	0.253
N	161	0.622	0.006	0.025	0.021	0.385	0.205
N	166	0.631	0.008	0.003	0.022	0.432	0.238
N	167	0.631	0.014	0.002	0.008	0.324	0.412
N	168	0.547	0.007	0.012	0.008	0.350	0.294
N	169	0.578	0.016	0.012	0.011	0.426	0.294

The test results in the table below shows that the all measured 4cm<sup>2</sup> PD values are less than PD\_design\_target of 0.631 mW/cm<sup>2</sup>, thus, the non-selected surfaces have no influence on the determined  $\Delta_{min}$  and input.power.limit in Section 7.

**Table 19**  
**4cm<sup>2</sup> PD of the selected beams measured on the corresponding surfaces**  
**that are not selected for  $\Delta_{min}$  determination**

Band	Antenna	Beam ID	Surface	Tested Power Level (dBm)	input.power.limit (dBm)	Meas. 4cm <sup>2</sup> PD (mW/cm <sup>2</sup> )
n258	M	24	Front	8.1	8.1	0.036
		152	Top	3.6	3.6	0.073
	N	16	Front	5.8	5.8	0.090
n261	M	0	Front	11.4	11.4	0.022
		24	Top	4.7	4.7	0.100
	N	29	Front	3.1	3.1	0.126
n260	M	128	Left	12.3	12.3	0.262
		152	Front	6.7	6.7	0.040
		28	Top	4.8	4.8	0.069
	N	129	Front	12.7	12.4	0.198

## 7 PD Char

### 7.1 Single Beams

To determine the input power limit at each antenna port, simulation was performed at low, mid, and high channel for each mmW band supported, with 6 dBm input power per active port for n258 band, 6 dBm input power per active port for n261 band, and 6 dBm input power per active port for n260 band:

1. Obtained PD<sub>surface</sub> value (the worst PD among all identified surfaces of the DUT) at all three channels for all single beams specified in the codebook.
2. Derived a scaling factor at low, mid and high channel,  $s(i)_{low\_or\_mid\_or\_high}$ , by:

$$s(i)_{low\_or\_mid\_or\_high} = \frac{PD\ design\ target}{sim.PD_{surface}(i)}, \quad i \in single\ beams \quad (1)$$

3. Determined the worst-case scaling factor,  $s(i)$ , among low, mid and high channels:

$$s(i) = \min\{s_{low}(i), s_{mid}(i), s_{high}(i)\}, \quad i \in single\ beams \quad (2)$$

and this scaling factor applies to the input power at each antenna port.

For 2<sup>nd</sup> generation of Smart Transmit, "Qualcomm MG Script" prints the  $sim.power_{limit}$  for all three channels, denoted as  $sim.power_{limit\_L}$ ,  $sim.power_{limit\_M}$ , and  $sim.power_{limit\_H}$ . The  $sim.power_{limit}$  is determined by:

$$sim.power_{limit} = \min\{sim.power_{limit\_L}, sim.power_{limit\_M}, sim.power_{limit\_H}\}$$

## 7.2 Beam Pairs

Per the manufacturer, the relative phase between beam pair is not controlled in the chipset design and could vary from run to run. Therefore, for each beam pair, based on the simulation results, the worst-case scaling factor was determined mathematically to ensure the compliance. The worst-case PD for MIMO operations was found by sweeping the relative phase for all possible angles to ensure a conservative assessment. The power density simulation report contains the worst-case power density for each surface after sweeping through all relative phases between beams.

Once the power density was determined for the worst-case  $\emptyset$ , the scaling factor was obtained by the below equation for low, mid and high channels:

$$s(i)_{low\_or\_mid\_or\_high} = \frac{PD\ design\ target}{total\ PD\ (\emptyset(i)_{worstcase})}, i \in beam\ pairs \quad (3)$$

The *total PD* ( $\emptyset_{worstcase}$ ) varies with channel and beam pair, the lowest scaling factor among all three channels,  $s(i)$ , is determined for the beam pair  $i$ :

$$\mathbf{s(i)} = \min\{s_{low}(i), s_{mid}(i), s_{high}(i)\}, i \in beam\ pairs \quad (4)$$

For 2<sup>nd</sup> generation of Smart Transmit, "Qualcomm MG Script" prints the `sim.power_limit` for all three channels, denoted as `sim.power_limit_L`, `sim.power_limit_M`, and `sim.power_limit_H`. The `sim.power_limit` is determined by:

$$sim.\ power\_limit = \min\{sim.\ power\_limit\_L, sim.\ power\_limit\_M, sim.\ power\_limit\_H\}$$

### 7.3 Input.Power.Limit Calculations

The PD Char specifies the limit of input power at antenna port that corresponds to PD\_design\_target for all the beams.

Ideally, if there is no uncertainty associated with hardware design, the input power limit, denoted as *input.power.limit(i)*, for beam *i* can be obtained after accounting for the housing influence ( $\Delta_{min}$ ), given by:

- For n258, n261, and n260

$$input.power.limit(i) = sim.power_{limit} + 10 * \log(s(i)) + \Delta_{min}, i \in all\ beams \quad (5)$$

where 6 dBm is the input power used in simulation for n258, n261 and n260, respectively;  $s(i)$  is the scaling factor obtained from Eq. (2) or Eq. (4) for beam *i*;  $\Delta_{min}$  is the worst-case housing influence factor for beam *i*.

If simulation overestimates the housing influence, then  $\Delta_{min}$  (= simulated PD – measured PD) is negative, which means that the measured PD would be higher than the simulated PD. The input power to antenna elements determined via simulation must be decreased for compliance.

Similarly, if simulation underestimates the loss, then  $\Delta_{min}$  is positive (measured PD would be lower than the simulated value). Input power to antenna elements determined via simulation can be increased and still be PD compliant.

In reality the hardware design has uncertainty which must be properly considered. The device design related uncertainty is embedded in the process of  $\Delta_{min}$  determination. Since the device uncertainty is already accounted for in PD\_design\_target, it needs to be removed to avoid double counting this uncertainty.

Thus, Equation 5 is modified to:

**If** -TxAGC uncertainty <  $\Delta_{min}$  < TxAGC uncertainty,

$$input.power.limit(i) = sim.power_{limit}(i), i \in all\ beams, \text{ for n258, n261, and n260} \quad (6)$$

**else if**  $\Delta_{min}$  < -TxAGC uncertainty,

$$input.power.limit(i) = sim.power_{limit}(i) + (\Delta_{min} + TxAGC\ uncertainty), \\ i \in all\ beams, \text{ for n258, n261, and n260} \quad (7)$$

**else if**  $\Delta_{min}$  > TxAGC uncertainty,

$$input.power.limit(i) = sim.power_{limit}(i) + (\Delta_{min} - TxAGC\ uncertainty), \\ i \in all\ beams, \text{ for n258, n261, and n260} \quad (8)$$

Following above logic, the `input.power.limit` for this DUT can be calculated using Equations (6), (7), and (8), i.e.,

**Table 20**  
***input.power.limit* Calculation**

Band	Antenna	$\Delta_{min}$	TxAGC Uncertainty	<i>input.power.limit</i>	Notes
		(dB)	(dB)	(dBm)	
n258	M	3.04	0.63	$input.power.limit(l) = sim.power\_limit + 2.41$	Using Eq.8
	N	1.02	0.63	$input.power.limit(l) = sim.power\_limit + 0.39$	Using Eq.8
n261	M	2.55	0.63	$input.power.limit(l) = sim.power\_limit + 1.92$	Using Eq.8
	N	2.56	0.63	$input.power.limit(l) = sim.power\_limit + 1.93$	Using Eq.8
n260	M	2.81	0.63	$input.power.limit(l) = sim.power\_limit + 2.18$	Using Eq.8
	N	2.47	0.63	$input.power.limit(l) = sim.power\_limit + 1.84$	Using Eq.8

**Table 21**  
***Permanent backoff applied to calculated input.power.limit***

Band	Antenna	backoff (dB)
n258	M	0.5
n258	N	0.5
n261	M	0.5
n261	N	0.5
n260	M	0.5
n260	N	0.5

Note: The above backoff values have been permanently applied to the `input.power.limits` calculated from the equations above. The final `input.power.limits` implemented in the EFS are in the tables below.

**Table 22**  
***Permanent backoff applied to specific beams***

Band	Antenna	Beam ID	backoff (dB)
n260	N	129	0.3
n260	N	150	0.3
n260	N	160	0.3
n260	N	169	0.3

Note: The above backoff values have been permanently applied to the `input.power.limits` calculated from the equations above. The final `input.power.limits` implemented in the EFS are in the tables below.



**Table 23**  
**5G NR n258 M Patch *input.power.limit***

Band	Beam ID 1	Beam ID 2	input.power.limit
n258	0	-	12.7
n258	2	-	11.8
n258	4	-	11.3
n258	6	-	11.2
n258	8	-	11.5
n258	10	-	11.1
n258	11	-	9.6
n258	12	-	8.1
n258	13	-	8.5
n258	18	-	8.3
n258	19	-	8.8
n258	20	-	7.2
n258	24	-	8.1
n258	25	-	4.1
n258	26	-	4.2
n258	27	-	4.2
n258	28	-	3.8
n258	34	-	6.2
n258	35	-	4.3
n258	36	-	4.4
n258	37	-	3.8
n258	-	128	10.2
n258	-	130	10.2
n258	-	132	10.9
n258	-	134	10.6
n258	-	136	10.7
n258	-	138	9.0
n258	-	139	6.8
n258	-	140	6.7
n258	-	141	6.9
n258	-	146	7.9
n258	-	147	6.8
n258	-	148	7.1
n258	-	152	3.6
n258	-	153	3.2
n258	-	154	3.7
n258	-	155	2.9
n258	-	156	2.4
n258	-	162	2.4
n258	-	163	3.8
n258	-	164	3.7
n258	-	165	2.7
n258	0	128	8.0
n258	2	130	7.6
n258	4	132	7.9
n258	6	134	7.5
n258	8	136	7.5
n258	10	138	6.1
n258	11	139	4.4
n258	12	140	4.2
n258	13	141	4.2
n258	18	146	4.7
n258	19	147	4.3
n258	20	148	3.9
n258	24	152	1.0
n258	25	153	0.1
n258	26	154	0.8
n258	27	155	0.2
n258	28	156	-0.3
n258	34	162	-0.4
n258	35	163	0.6
n258	36	164	0.9
n258	37	165	-0.2

**Table 24**

**5G mmWave NR n258 N Patch *input.power.limit***

Band	Beam ID 1	Beam ID 2	input.power.limit
n258	1	-	9.0
n258	3	-	8.2
n258	5	-	8.5
n258	7	-	8.6
n258	9	-	9.4
n258	14	-	6.3
n258	15	-	7.3
n258	16	-	5.8
n258	17	-	4.7
n258	21	-	5.3
n258	22	-	6.2
n258	23	-	4.7
n258	29	-	5.6
n258	30	-	4.7
n258	31	-	1.4
n258	32	-	2.4
n258	33	-	2.5
n258	38	-	6.2
n258	39	-	2.2
n258	40	-	1.4
n258	41	-	2.4
n258	-	129	11.9
n258	-	131	12.0
n258	-	133	12.7
n258	-	135	12.6
n258	-	137	10.8
n258	-	142	8.0
n258	-	143	7.6
n258	-	144	8.4
n258	-	145	10.4
n258	-	149	7.5
n258	-	150	7.9
n258	-	151	10.2
n258	-	157	4.0
n258	-	158	4.2
n258	-	159	4.8
n258	-	160	4.5
n258	-	161	6.0
n258	-	166	4.0
n258	-	167	4.5
n258	-	168	5.0
n258	-	169	4.8
n258	1	129	7.3
n258	3	131	7.0
n258	5	133	6.5
n258	7	135	7.1
n258	9	137	7.3
n258	14	142	4.5
n258	15	143	6.0
n258	16	144	4.9
n258	17	145	4.0
n258	21	149	3.7
n258	22	150	4.1
n258	23	151	3.8
n258	29	157	2.0
n258	30	158	2.0
n258	31	159	0.3
n258	32	160	1.1
n258	33	161	1.4
n258	38	166	2.4
n258	39	167	1.1
n258	40	168	0.4
n258	41	169	0.9

**Table 25**

**5G mmWave NR n261 M Patch *input.power.limit***

Band	Beam ID 1	Beam ID 2	input.power.limit
n261	0	-	11.4
n261	2	-	10.3
n261	4	-	11.0
n261	6	-	11.3
n261	8	-	10.4
n261	10	-	8.7
n261	11	-	7.0
n261	12	-	7.3
n261	13	-	8.1
n261	18	-	7.9
n261	19	-	6.7
n261	20	-	8.5
n261	24	-	4.7
n261	25	-	2.9
n261	26	-	3.7
n261	27	-	3.2
n261	28	-	3.7
n261	34	-	3.3
n261	35	-	3.5
n261	36	-	3.6
n261	37	-	3.0
n261	-	128	9.4
n261	-	130	9.2
n261	-	132	9.5
n261	-	134	9.3
n261	-	136	10.1
n261	-	138	6.7
n261	-	139	6.0
n261	-	140	5.9
n261	-	141	6.4
n261	-	146	6.3
n261	-	147	5.9
n261	-	148	6.0
n261	-	152	2.0
n261	-	153	2.3
n261	-	154	2.5
n261	-	155	2.0
n261	-	156	1.9
n261	-	162	1.9
n261	-	163	2.5
n261	-	164	2.3
n261	-	165	1.8
n261	0	128	6.6
n261	2	130	6.5
n261	4	132	6.6
n261	6	134	6.7
n261	8	136	6.6
n261	10	138	4.0
n261	11	139	3.3
n261	12	140	3.9
n261	13	141	3.1
n261	18	146	3.6
n261	19	147	3.1
n261	20	148	3.8
n261	24	152	-0.6
n261	25	153	-0.7
n261	26	154	-0.1
n261	27	155	-1.0
n261	28	156	-1.2
n261	34	162	-0.9
n261	35	163	-0.3
n261	36	164	-0.3
n261	37	165	-1.4

**Table 26**

**5G mmWave NR n261 N Patch *input.power.limit***

Band	Beam ID 1	Beam ID 2	input.power.limit
n261	1	-	10.9
n261	3	-	10.7
n261	5	-	10.4
n261	7	-	10.5
n261	9	-	10.4
n261	14	-	7.5
n261	15	-	7.7
n261	16	-	7.8
n261	17	-	8.0
n261	21	-	7.6
n261	22	-	8.3
n261	23	-	7.2
n261	29	-	3.1
n261	30	-	3.8
n261	31	-	4.8
n261	32	-	3.3
n261	33	-	3.3
n261	38	-	3.1
n261	39	-	4.7
n261	40	-	4.4
n261	41	-	2.8
n261	-	129	14.3
n261	-	131	15.3
n261	-	133	14.9
n261	-	135	14.8
n261	-	137	15.8
n261	-	142	12.3
n261	-	143	11.3
n261	-	144	11.8
n261	-	145	12.8
n261	-	149	12.1
n261	-	150	11.2
n261	-	151	11.5
n261	-	157	7.8
n261	-	158	7.7
n261	-	159	7.9
n261	-	160	8.1
n261	-	161	7.3
n261	-	166	8.4
n261	-	167	7.8
n261	-	168	7.9
n261	-	169	7.6
n261	1	129	9.1
n261	3	131	8.9
n261	5	133	8.7
n261	7	135	8.7
n261	9	137	8.8
n261	14	142	5.8
n261	15	143	5.4
n261	16	144	5.9
n261	17	145	6.0
n261	21	149	5.3
n261	22	150	6.3
n261	23	151	5.3
n261	29	157	0.9
n261	30	158	1.9
n261	31	159	2.3
n261	32	160	1.2
n261	33	161	0.9
n261	38	166	1.5
n261	39	167	2.2
n261	40	168	2.3
n261	41	169	0.6

**Table 27****5G mmWave NR n260 M Patch *input.power.limit***

Band	Beam ID 1	Beam ID 2	input.power.limit
n260	0	-	11.2
n260	2	-	11.5
n260	4	-	11.2
n260	6	-	11.4
n260	8	-	11.0
n260	10	-	8.1
n260	11	-	9.3
n260	12	-	8.4
n260	13	-	7.9
n260	18	-	8.4
n260	19	-	8.6
n260	20	-	8.1
n260	24	-	5.1
n260	25	-	5.6
n260	26	-	5.8
n260	27	-	5.2
n260	28	-	4.8
n260	34	-	5.6
n260	35	-	5.4
n260	36	-	5.8
n260	37	-	5.1
n260	-	128	12.3
n260	-	130	12.7
n260	-	132	11.9
n260	-	134	12.3
n260	-	136	12.6
n260	-	138	9.0
n260	-	139	9.6
n260	-	140	9.1
n260	-	141	8.8
n260	-	146	9.4
n260	-	147	9.6
n260	-	148	8.7
n260	-	152	6.7
n260	-	153	6.2
n260	-	154	5.8
n260	-	155	5.5
n260	-	156	5.1
n260	-	162	6.0
n260	-	163	6.4
n260	-	164	5.8
n260	-	165	5.5
n260	0	128	8.2
n260	2	130	8.3
n260	4	132	8.0
n260	6	134	8.0
n260	8	136	7.9
n260	10	138	5.0
n260	11	139	6.0
n260	12	140	5.1
n260	13	141	5.0
n260	18	146	6.2
n260	19	147	5.4
n260	20	148	4.3
n260	24	152	2.0
n260	25	153	2.2
n260	26	154	1.8
n260	27	155	1.2
n260	28	156	0.4
n260	34	162	2.2
n260	35	163	2.4
n260	36	164	1.6
n260	37	165	1.0

**Table 28****5G mmWave NR n260 N Patch *input.power.limit***

Band	Beam ID 1	Beam ID 2	input.power.limit
n260	1	-	10.4
n260	3	-	10.6
n260	5	-	10.6
n260	7	-	10.5
n260	9	-	10.5
n260	14	-	7.9
n260	15	-	7.7
n260	16	-	7.5
n260	17	-	7.7
n260	21	-	7.6
n260	22	-	7.6
n260	23	-	7.5
n260	29	-	4.0
n260	30	-	4.5
n260	31	-	4.0
n260	32	-	3.9
n260	33	-	3.7
n260	38	-	4.6
n260	39	-	4.4
n260	40	-	3.8
n260	41	-	3.8
n260	-	129	12.4
n260	-	131	11.7
n260	-	133	11.9
n260	-	135	11.5
n260	-	137	11.7
n260	-	142	9.1
n260	-	143	8.5
n260	-	144	8.7
n260	-	145	9.0
n260	-	149	8.6
n260	-	150	9.4
n260	-	151	9.3
n260	-	157	5.7
n260	-	158	4.8
n260	-	159	5.7
n260	-	160	5.0
n260	-	161	6.5
n260	-	166	5.5
n260	-	167	5.5
n260	-	168	5.5
n260	-	169	5.7
n260	1	129	7.5
n260	3	131	7.1
n260	5	133	7.5
n260	7	135	7.1
n260	9	137	7.1
n260	14	142	5.8
n260	15	143	5.3
n260	16	144	4.1
n260	17	145	5.6
n260	21	149	4.4
n260	22	150	5.3
n260	23	151	5.6
n260	29	157	0.6
n260	30	158	0.6
n260	31	159	0.6
n260	32	160	0.9
n260	33	161	1.3
n260	38	166	0.8
n260	39	167	0.8
n260	40	168	0.4
n260	41	169	0.9