



## SAR EVALUATION REPORT

**Applicant Name:**  
 Samsung Electronics Co., Ltd.  
 129, Samsung-ro, Maetan dong,  
 Yeongtong-gu, Suwon-si  
 Gyeonggi-do, 16677, Korea

**Date of Testing:**  
 10/31/21 - 11/15/21  
**Test Site/Location:**  
 PCTEST Lab, Columbia, MD, USA  
**Document Serial No.:**  
 1M2112090152-01.A3L

**FCC ID:** A3LSMS908U

**APPLICANT:** SAMSUNG ELECTRONICS CO., LTD.


**DUT Type:** Portable Handset  
**Application Type:** Class II Permissive Change  
**FCC Rule Part(s):** CFR §2.1093  
**Model(s):** SM-S908U, SM-S908U1  
**Permissive Change(s):** See FCC Change Document  
**Date of Original Certification:** 12/10/21

Equipment Class	Band & Mode	Tx Frequency	SAR			
			1g Head (W/kg)	1g Body-Worn (W/kg)	1g Hotspot (W/kg)	10g Phablet (W/kg)
CBE	NR Band n48	3555 - 3694.98 MHz	0.88	0.14	0.67	3.15
<b>Simultaneous SAR per KDB 690783 D01v01r03:</b>			1.59	N/A	N/A	3.99

Only operations relevant to this permissive change were evaluated for compliance. Please see the original compliance evaluation in RF Exposure Technical Report S/N 1M2109090102-01 (Rev1).A3L for complete evaluation of all other operating modes. The operational description includes a description of all changed items.



This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.9 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.

  
 Randy Ortanez  
 President






The SAR Tick is an initiative of the Mobile & Wireless Forum (MWF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MWF. Further details can be obtained by emailing: sartick@mwfai.info.

FCC ID: A3LSMS908U		SAR EVALUATION REPORT		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2112090152-01.A3L	<b>Test Dates:</b> 10/31/21 - 11/15/21	<b>DUT Type:</b> Portable Handset	Page 1 of 35	

# TABLE OF CONTENTS




1	DEVICE UNDER TEST .....	3
2	LTE AND NR INFORMATION .....	12
3	INTRODUCTION .....	14
4	DOSIMETRIC ASSESSMENT .....	15
5	DEFINITION OF REFERENCE POINTS .....	16
6	TEST CONFIGURATION POSITIONS .....	17
7	RF EXPOSURE LIMITS .....	21
8	FCC MEASUREMENT PROCEDURES.....	22
9	RF CONDUCTED POWERS.....	23
10	SYSTEM VERIFICATION.....	24
11	SAR DATA SUMMARY .....	26
12	SAR MEASUREMENT VARIABILITY .....	30
13	EQUIPMENT LIST.....	31
14	MEASUREMENT UNCERTAINTIES.....	32
15	CONCLUSION.....	33
16	REFERENCES .....	34
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: SAR TISSUE SPECIFICATIONS		
APPENDIX D: ANTENNA GROUPING ANALYSIS & JUSTIFICATION		
APPENDIX E: SIMULTANEOUS NUMERICAL CALCULATIONS		
APPENDIX F: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS		
APPENDIX G: SAR SYSTEM VALIDATION		
APPENDIX H: NR LOWER BANDWIDTH RF CONDUCTED POWERS		
APPENDIX I: PROBE AND DIPOLE CALIBRATION CERTIFICATES		

FCC ID: A3LSMS908U	 <small>Proud to be part of</small> 	SAR EVALUATION REPORT		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2112090152-01.A3L	<b>Test Dates:</b> 10/31/21 - 11/15/21	<b>DUT Type:</b> Portable Handset	Page 2 of 35	

# 1 DEVICE UNDER TEST

## 1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1750	Voice/Data	1712.4 - 1752.6 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
LTE Band 71	Voice/Data	665.5 - 695.5 MHz
LTE Band 12	Voice/Data	699.7 - 715.3 MHz
LTE Band 17	Voice/Data	779.5 - 784.5 MHz
LTE Band 13	Voice/Data	779.5 - 784.5 MHz
LTE Band 14	Voice/Data	790.5 - 795.5 MHz
LTE Band 26 (Cell)	Voice/Data	814.7 - 848.3 MHz
LTE Band 5 (Cell)	Voice/Data	824.7 - 848.3 MHz
LTE Band 66 (AWS)	Voice/Data	1710.7 - 1779.3 MHz
LTE Band 4 (AWS)	Voice/Data	1710.7 - 1754.3 MHz
LTE Band 25 (PCS)	Voice/Data	1850.7 - 1914.3 MHz
LTE Band 2 (PCS)	Voice/Data	1850.7 - 1909.3 MHz
LTE Band 30	Voice/Data	2307.5 - 2312.5 MHz
LTE Band 7	Voice/Data	2502.5 - 2567.5 MHz
LTE Band 48	Voice/Data	3552.5 - 3697.5 MHz
LTE Band 41	Voice/Data	2498.5 - 2687.5 MHz
LTE Band 38	Voice/Data	2572.5 - 2617.5 MHz
NR Band n71	Voice/Data	665.5 - 695.5 MHz
NR Band n12	Voice/Data	701.5 - 713.5 MHz
NR Band n5 (Cell)	Voice/Data	826.5 - 846.5 MHz
NR Band n66 (AWS)	Voice/Data	1712.5 - 1777.5 MHz
NR Band n25 (PCS)	Voice/Data	1852.5 - 1912.5 MHz
NR Band n2 (PCS)	Voice/Data	1852.5 - 1907.5 MHz
NR Band n30	Voice/Data	2307.5 - 2312.5 MHz
NR Band n7	Voice/Data	2502.5 - 2567.5 MHz
NR Band n41	Voice/Data	2506.02 - 2679.99 MHz
NR Band n38	Voice/Data	2575 - 2615 MHz
NR Band n48	Voice/Data	3555 - 3694.98 MHz
NR Band n78	Voice/Data	3460.02 - 3639.99 MHz
NR Band n77 DoD	Voice/Data	3455.01 - 3544.98 MHz
NR Band n77	Voice/Data	3705 - 3975 MHz
2.4 GHz WLAN	Voice/Data	2412 - 2462 MHz
U-NII-1	Voice/Data	5180 - 5240 MHz
U-NII-2A	Voice/Data	5260 - 5320 MHz
U-NII-2C	Voice/Data	5500 - 5720 MHz
U-NII-3	Voice/Data	5745 - 5825 MHz
U-NII-4	Voice/Data	5845 - 5885 MHz
U-NII-5	Voice/Data	5935 - 6415 MHz
U-NII-6	Voice/Data	6435 - 6525 MHz
U-NII-7	Voice/Data	6535 - 6875 MHz
U-NII-8	Voice/Data	6895 - 7115 MHz
Bluetooth	Data	2402 - 2480 MHz
NFC	Data	13.56 MHz
NR Band n258	Data	24250 - 24450 MHz; 24750 - 25250 MHz
NR Band n260	Data	37000 - 40000 MHz
NR Band n261	Data	27500 - 28350 MHz
UWB	Data	6489.6 - 7987.2 MHz

FCC ID: A3LSMS908U	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2112090152-01.A3L	Test Dates: 10/31/21 - 11/15/21	DUT Type: Portable Handset		Page 3 of 35

## 1.2 Time-Averaging Algorithm for RF Exposure Compliance




This Device is enabled with the Qualcomm® Smart Transmit Gen2 feature. This feature performs time averaging algorithm in real time to control and manage transmitting power and ensure the time-averaged RF exposure is in compliance with FCC requirements all the time. Refer to Compliance Summary document for detailed description of Qualcomm® Smart Transmit feature (report SN could be found in Section 1.11 – Bibliography).

Note that WLAN operations are not enabled with Smart Transmit.




The Smart Transmit algorithm maintains the time-averaged transmit power, in turn, time-averaged RF exposure of *SAR\_design\_target*, below the predefined time-averaged power limit (i.e.,  $P_{limit}$  for sub-6 radio), for each characterized technology and band (see RF Exposure Part 0 Test Report, report SN could be found in Section 1.11 - Bibliography).

The Smart Transmit algorithm maintains the time-averaged transmit power, in turn, time-averaged RF exposure of *SAR\_design\_target* or *PD\_design\_target*, below the predefined time-averaged power limit (i.e.,  $P_{limit}$  for sub-6 radio, and *input.power.limit* for 5G mmW NR), for each characterized technology and band (see RF Exposure Part 0 Test Report, report SN can be found in Section 1.11 - Bibliography).

Smart Transmit allows the device to transmit at higher power instantaneously, as high as  $P_{max}$ , when needed, but enforces power limiting to maintain time-averaged transmit power to  $P_{limit}$ . Below table shows  $P_{limit}$  EFS settings and maximum tune up output power  $P_{max}$  configured for this EUT for various transmit conditions (Device State Index DSI). Note that the device uncertainty for sub-6GHz WWAN is 1.0dB for this EUT.

FCC ID: A3LSMS908U	 <small>Proud to be part of</small> 	SAR EVALUATION REPORT	 <b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2112090152-01.A3L	<b>Test Dates:</b> 10/31/21 - 11/15/21	<b>DUT Type:</b> Portable Handset	Page 4 of 35

Exposure Scenario			Body-Worn	Phablet Max	Phablet Reduced	Head	Hotspot	Earjack	Maximum Tune-Up Output Power*
Averaging Volume			1g	10g	10g	1g	1g	10g	
Spacing			15 mm	12, 8, 6, 0 mm	0 mm	0 mm	10 mm	0 mm	
DSI			0	0	1	2	3	4	
Technology/Band	Antenna	Antenna Group							Pmax
GSM 850	A	AG0	30.9	28.3	32.7	25.5	28.3	25.3	
GSM 1900	A	AG0	24.9	22.7	34.5	18.5	22.7	21.6	
UMTS 850	A	AG0	29.4	27.8	31.5	26.3	27.8	24.0	
UMTS 1750	A	AG0	25.0	19.0	32.9	19.0	19.0	23.0	
UMTS 1900	A	AG0	25.6	20.5	33.6	17.5	20.5	23.0	
LTE Band 71	A	AG0	31.4	28.9	34.4	29.4	28.9	24.7	
LTE Band 12	A	AG0	31.0	28.0	33.0	28.8	28.0	24.5	
LTE Band 13	A	AG0	29.7	28.0	31.9	27.0	28.0	24.2	
LTE Band 14	A	AG0	29.8	28.1	31.5	26.5	28.1	24.5	
LTE Band 26 (Cell)	A	AG0	29.2	27.6	29.5	26.1	27.6	24.5	
LTE Band 5 (Cell)	A	AG0	29.2	27.7	31.4	25.9	27.7	24.5	
LTE Band 66/4 (AWS)	A	AG0	25.6	20.0	33.0	18.5	20.0	23.8	
LTE Band 25/2 (PCS)	A	AG0	24.6	20.5	33.5	17.5	20.5	23.5	
LTE Band 30	A	AG0	26.3	21.5	36.8	18.5	21.5	22.5	
LTE Band 7	B	AG0	26.3	20.0	36.5	20.0	20.0	23.0	
LTE Band 41/38 (PC3)	B	AG0	27.9	20.0	36.7	20.0	20.0	22.0	
LTE Band 41 (PC2)	B	AG0	27.9	20.0	36.7	20.0	20.0	22.9	
LTE Band 48	F	AG1	17.0	17.0	17.0	17.0	17.0	21.0	
NR Band n71	A	AG0	26.4	27.3	32.7	28.4	27.3	24.8	
NR Band n12	A	AG0	30.3	27.4	32.1	28.8	27.4	24.7	
NR Band n5 (Cell)	A	AG0	28.8	26.4	30.3	25.6	26.4	24.8	
NR Band n66 (AWS)	A	AG0	25.2	20.0	32.8	18.5	20.0	23.9	
NR Band n66 (AWS)	J	AG1	19.0	19.0	18.0	19.0	19.0	23.5	
NR Band n25/2 (PCS)	A	AG0	26.0	20.5	32.4	17.5	20.5	23.5	
NR Band n25/2 (PCS)	J	AG1	19.0	19.0	18.0	19.0	19.0	23.5	
NR Band n30	A	AG0	25.5	21.5	36.9	18.5	21.5	22.5	
NR Band n30	J	AG1	18.0	18.0	18.0	18.0	18.0	22.0	
NR Band n7	B	AG0	26.9	20.0	35.8	20.0	20.0	23.0	
NR Band n41 SRS 1 (PC3)/n38	J	AG1	19.0	19.0	18.0	19.0	19.0	24.0	
NR Band n41 SRS 1 (PC2)	J	AG1	19.0	19.0	18.0	19.0	19.0	26.0	
NR Band n41 SRS 2 (PC3)	D	AG0	15.5	15.5	15.5	15.5	15.5	18.5	
NR Band n41 SRS 2 (PC2)	D	AG0	15.5	15.5	15.5	15.5	15.5	20.5	
NR Band n41 SRS 3 (PC3)	E	AG1	14.0	14.0	14.0	14.0	14.0	17.8	
NR Band n41 SRS 3 (PC2)	E	AG1	14.0	14.0	14.0	14.0	14.0	19.8	
NR Band n41 SRS 4 (PC3)	B	AG0	18.0	18.0	18.0	18.0	18.0	20.0	
NR Band n41 SRS 4 (PC2)	B	AG0	18.0	18.0	18.0	18.0	18.0	22.0	
NR Band n48	F	AG1	17.0	17.0	17.0	17.0	17.0	23.0	
NR Band n77 DoD SRS 1 (PC3)	F	AG1	17.0	17.0	17.0	17.0	17.0	24.0	
NR Band n77 DoD SRS 1 (PC2)	F	AG1	17.0	17.0	17.0	17.0	17.0	26.0	
NR Band n77 DoD SRS 2 (PC3)	I	AG1	17.0	17.0	17.0	17.0	17.0	24.0	
NR Band n77 DoD SRS 2 (PC2)	I	AG1	17.0	17.0	17.0	17.0	17.0	26.0	
NR Band n77 DoD SRS 3 (PC3)	D	AG0	10.5	10.5	10.5	10.5	10.5	17.5	
NR Band n77 DoD SRS 3 (PC2)	D	AG0	10.5	10.5	10.5	10.5	10.5	19.5	
NR Band n77 DoD SRS 4 (PC3)	C	AG0	11.0	11.0	11.0	11.0	11.0	16.5	
NR Band n77 DoD SRS 4 (PC2)	C	AG0	11.0	11.0	11.0	11.0	11.0	18.5	
NR Band n77 SRS 1 (PC3)	F	AG1	17.0	17.0	17.0	17.0	17.0	24.0	
NR Band n77 SRS 1 (PC2)	F	AG1	17.0	17.0	17.0	17.0	17.0	26.0	
NR Band n77 SRS 2 (PC3)	I	AG1	17.0	17.0	17.0	17.0	17.0	24.0	
NR Band n77 SRS 2 (PC2)	I	AG1	17.0	17.0	17.0	17.0	17.0	26.0	
NR Band n77 SRS 3 (PC3)	D	AG0	10.5	10.5	10.5	10.5	10.5	17.5	
NR Band n77 SRS 3 (PC2)	D	AG0	10.5	10.5	10.5	10.5	10.5	19.5	
NR Band n77 SRS 4 (PC3)	C	AG0	11.0	11.0	11.0	11.0	11.0	16.5	
NR Band n77 SRS 4 (PC2)	C	AG0	11.0	11.0	11.0	11.0	11.0	18.5	

FCC ID: A3LSMS908U	 PCTEST Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2112090152-01.A3L	Test Dates: 10/31/21 - 11/15/21	DUT Type: Portable Handset	Page 5 of 35	

\*Note all  $P_{limit}$  EFS and maximum tune up output power  $P_{max}$  levels entered in above Table correspond to average power levels after accounting for duty cycle in the case of TDD modulation schemes (e.g. GSM and LTE TDD).

\*Maximum tune up output power  $P_{max}$  is used to configure EUT during RF tune up procedure. The maximum allowed output power is equal to maximum Tune up output power + 1dB device design uncertainty.

The maximum time-averaged output power (dBm) for any 2G/3G/4G/5G Sub6 WWAN technology, band, and DSI = minimum of " $P_{limit}$  EFS" and "Maximum tune up output power  $P_{max}$ " + 1dB device uncertainty. SAR values in this report were scaled to this maximum time-averaged output power to determine compliance per KDB Publication 447498 D01v06.

The purpose of this report (Part 1 test) is to demonstrate that the EUT meets FCC SAR limits when transmitting in static transmission scenario at maximum allowable time-averaged power levels.

**Measurement Condition: All conducted power and SAR measurements in this report (Part 1 test) were performed by setting *Reserve\_power\_margin* (Smart Transmit EFS entry) to 0dB.**

### 1.3 Power Reduction for SAR

This device used an independent fixed level power reduction mechanism for WLAN/BT when 5G NR is active and also for WLAN/BT during all voice or VoIP held to ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the head SAR positions described in IEEE 1528-2013. Detailed descriptions of the power reduction mechanism are included in the operational description.

### 1.4 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

#### 1.4.1 5G Output Power




Only operations relevant to this permissive change were evaluated for compliance. No other target changes have been made. Targets for all other bands/exposure conditions can be found in the original filing.

Mode / Band	Antenna		Modulated Average Output Power (in dBm)					
			Pmax	DSI =0 (Body- Worn or Phablet Max)	DSI =1 (Phablet Reduced)	DSI =2 (Head)	DSI =3 (Hotspot)	DSI =4 (Earjack)
NR Band n48	F	Max Allowed Power	24.0	18.0	18.0	18.0	18.0	18.0
		Nominal	23.0	17.0	17.0	17.0	17.0	17.0

For NR TDD, the above powers listed are TDD burst average values.

#### 1.4.2 WLAN and Bluetooth Maximum and Reduced Output Powers

Only operations relevant to this permissive change were evaluated for compliance. No other target changes have been made. Targets for all other bands/exposure conditions can be found in the original filing.

FCC ID: A3LSMS908U	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2112090152-01.A3L	Test Dates: 10/31/21 - 11/15/21	DUT Type: Portable Handset		Page 6 of 35




## 1.5 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device antennas can be found in Appendix F. Since the diagonal dimension of this device is > 160 mm and <200 mm, it is considered a “phablet.”

**Table 1-1  
Device Edges/Sides for SAR Testing**

Device Sides/Edges for SAR Testing						
Mode	Back	Front	Top	Bottom	Right	Left
GPRS 850	Yes	Yes	No	Yes	Yes	Yes
GPRS 1900	Yes	Yes	No	Yes	Yes	Yes
UMTS 850	Yes	Yes	No	Yes	Yes	Yes
UMTS 1750	Yes	Yes	No	Yes	Yes	Yes
UMTS 1900	Yes	Yes	No	Yes	Yes	Yes
LTE Band 71	Yes	Yes	No	Yes	Yes	Yes
LTE Band 12	Yes	Yes	No	Yes	Yes	Yes
LTE Band 13	Yes	Yes	No	Yes	Yes	Yes
LTE Band 14	Yes	Yes	No	Yes	Yes	Yes
LTE Band 26 (Cell)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 5 (Cell)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 66 (AWS)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 25 (PCS)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 30	Yes	Yes	No	Yes	Yes	Yes
LTE Band 7	Yes	Yes	No	Yes	Yes	No
LTE Band 48	Yes	Yes	Yes	No	No	Yes
LTE Band 41	Yes	Yes	No	Yes	Yes	No
NR Band n71	Yes	Yes	No	Yes	Yes	Yes
NR Band n12	Yes	Yes	No	Yes	Yes	Yes
NR Band n5 (Cell)	Yes	Yes	No	Yes	Yes	Yes
NR Band n66 (AWS) Antenna A	Yes	Yes	No	Yes	Yes	Yes
NR Band n66 (AWS) Antenna J	Yes	Yes	Yes	No	Yes	No
NR Band n25 (PCS) Antenna A	Yes	Yes	No	Yes	Yes	Yes
NR Band n25 (PCS) Antenna J	Yes	Yes	Yes	No	Yes	No
NR Band n30 Antenna A	Yes	Yes	No	Yes	Yes	Yes
NR Band n30 Antenna J	Yes	Yes	Yes	No	Yes	No
NR Band n7 Antenna B	Yes	Yes	No	Yes	Yes	No
NR Band n41 Antenna J	Yes	Yes	Yes	No	Yes	No
NR Band n41 Antenna D	Yes	Yes	No	Yes	No	Yes
NR Band n41 Antenna E	Yes	Yes	Yes	No	No	Yes
NR Band n41 Antenna B	Yes	Yes	No	Yes	Yes	No
NR Band n48 Antenna F	Yes	Yes	Yes	No	No	Yes
NR Band n77 DoD Antenna F	Yes	Yes	Yes	No	No	Yes
NR Band n77 DoD Antenna I	Yes	Yes	Yes	No	No	Yes
NR Band n77 DoD Antenna D	Yes	Yes	No	Yes	No	Yes
NR Band n77 DoD Antenna C	Yes	Yes	No	Yes	Yes	No
NR Band n77 Antenna F	Yes	Yes	Yes	No	No	Yes
NR Band n77 Antenna I	Yes	Yes	Yes	No	No	Yes
NR Band n77 Antenna D	Yes	Yes	No	Yes	No	Yes
NR Band n77 Antenna C	Yes	Yes	No	Yes	Yes	No
2.4 GHz WLAN Ant 1	Yes	Yes	Yes	No	No	Yes
2.4 GHz WLAN Ant 2	Yes	Yes	No	No	No	Yes
2.4 GHz WLAN MIMO	Yes	Yes	Yes	No	No	Yes
5 GHz WLAN MIMO	Yes	Yes	Yes	No	No	Yes
Bluetooth Ant 1	Yes	Yes	Yes	No	No	Yes
Bluetooth Ant 2	Yes	Yes	No	No	No	Yes
Bluetooth MIMO	Yes	Yes	Yes	No	No	Yes

Note: Particular DUT edges were not required to be evaluated for wireless router SAR or phablet SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v02r01 Section III and FCC KDB Publication 648474 D04v01r03. The distances between the transmit antennas and the edges of the device are included in the filing. When wireless router mode is enabled, U-NII-1, U-NII-2A, U-NII-2C, UNII-4, and WIFI6E operations are disabled.

FCC ID: A3LSMS908U	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2112090152-01.A3L	Test Dates: 10/31/21 - 11/15/21	DUT Type: Portable Handset		Page 7 of 35




## 1.6 Near Field Communications (NFC) Antenna

This DUT has NFC operations. The NFC antenna is integrated into the device for this model. Therefore, all SAR tests were performed with the device which already incorporates the NFC antenna. A diagram showing the location of the NFC antenna can be found in Appendix F.

## 1.7 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be operating simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.




This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures.

<b>FCC ID:</b> A3LSMS908U	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2112090152-01.A3L	<b>Test Dates:</b> 10/31/21 - 11/15/21	<b>DUT Type:</b> Portable Handset		Page 8 of 35



**Table 1-2  
Simultaneous Transmission Scenarios**

No.	Capable Transmit Configuration	Head	Body-Worn Accessory	Wireless Router	Phablet	Notes
1	GSM voice + 2.4 GHz WLAN	Yes	Yes	N/A	Yes	
2	GSM voice + 2.4 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
3	GSM voice + 5 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
4	GSM voice + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
5	GSM voice + 2.4 GHz Bluetooth	Yes <sup>A</sup>	Yes	N/A	Yes	<sup>A</sup> Bluetooth Tethering is considered
6	GSM voice + 2.4 GHz Bluetooth MIMO	Yes	Yes	N/A	Yes	
7	GSM voice + 2.4 GHz WLAN + 5 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
8	GSM voice + 2.4 GHz WLAN MIMO + 5 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
9	GSM voice + 2.4 GHz WLAN + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
10	GSM voice + 2.4 GHz WLAN MIMO + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
11	GSM voice + 2.4 GHz Bluetooth + 5 GHz WLAN MIMO	Yes <sup>A</sup>	Yes	N/A	Yes	<sup>A</sup> Bluetooth Tethering is considered
12	GSM voice + 2.4 GHz Bluetooth MIMO + 5 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
13	GSM voice + 2.4 GHz Bluetooth + 6 GHz WLAN MIMO	Yes <sup>A</sup>	Yes	N/A	Yes	<sup>A</sup> Bluetooth Tethering is considered
14	GSM voice + 2.4 GHz Bluetooth MIMO + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
15	UMTS + 2.4 GHz WLAN	Yes	Yes	Yes	Yes	
16	UMTS + 2.4 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
17	UMTS + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
18	UMTS + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
19	UMTS + 2.4 GHz Bluetooth	Yes <sup>A</sup>	Yes	Yes <sup>A</sup>	Yes	<sup>A</sup> Bluetooth Tethering is considered
20	UMTS + 2.4 GHz Bluetooth MIMO	Yes	Yes	Yes	Yes	
21	UMTS + 2.4 GHz WLAN + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
22	UMTS + 2.4 GHz WLAN MIMO + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
23	UMTS + 2.4 GHz WLAN + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
24	UMTS + 2.4 GHz WLAN MIMO + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
25	UMTS + 2.4 GHz Bluetooth + 5 GHz WLAN MIMO	Yes <sup>A</sup>	Yes	Yes <sup>A</sup>	Yes	<sup>A</sup> Bluetooth Tethering is considered
26	UMTS + 2.4 GHz Bluetooth MIMO + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
27	UMTS + 2.4 GHz Bluetooth + 6 GHz WLAN MIMO	Yes <sup>A</sup>	Yes	N/A	Yes	<sup>A</sup> Bluetooth Tethering is considered
28	UMTS + 2.4 GHz Bluetooth MIMO + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
29	LTE + 2.4 GHz WLAN	Yes	Yes	Yes	Yes	
30	LTE + 2.4 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
31	LTE + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
32	LTE + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
33	LTE + 2.4 GHz Bluetooth	Yes <sup>A</sup>	Yes	Yes <sup>A</sup>	Yes	<sup>A</sup> Bluetooth Tethering is considered
34	LTE + 2.4 GHz Bluetooth MIMO	Yes	Yes	Yes	Yes	
35	LTE + 2.4 GHz WLAN + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
36	LTE + 2.4 GHz WLAN MIMO + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
37	LTE + 2.4 GHz WLAN + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
38	LTE + 2.4 GHz WLAN MIMO + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
39	LTE + 2.4 GHz Bluetooth + 5 GHz WLAN MIMO	Yes <sup>A</sup>	Yes	Yes <sup>A</sup>	Yes	<sup>A</sup> Bluetooth Tethering is considered
40	LTE + 2.4 GHz Bluetooth MIMO + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
41	LTE + 2.4 GHz Bluetooth + 6 GHz WLAN MIMO	Yes <sup>A</sup>	Yes	N/A	Yes	<sup>A</sup> Bluetooth Tethering is considered
42	LTE + 2.4 GHz Bluetooth MIMO + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
43	LTE + NR	Yes	Yes	N/A	Yes	
44	LTE + NR + 2.4 GHz WLAN	Yes	Yes	Yes	Yes	
45	LTE + NR + 2.4 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
46	LTE + NR + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
47	LTE + NR + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
48	LTE + NR + 2.4 GHz Bluetooth	Yes <sup>A</sup>	Yes	Yes <sup>A</sup>	Yes	<sup>A</sup> Bluetooth Tethering is considered
49	LTE + NR + 2.4 GHz Bluetooth MIMO	Yes	Yes	Yes	Yes	
50	LTE + NR + 2.4 GHz WLAN + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
51	LTE + NR + 2.4 GHz WLAN MIMO + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
52	LTE + NR + 2.4 GHz WLAN + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
53	LTE + NR + 2.4 GHz WLAN MIMO + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
54	LTE + NR + 2.4 GHz Bluetooth + 5 GHz WLAN MIMO	Yes <sup>A</sup>	Yes	Yes <sup>A</sup>	Yes	<sup>A</sup> Bluetooth Tethering is considered
55	LTE + NR + 2.4 GHz Bluetooth MIMO + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
56	LTE + NR + 2.4 GHz Bluetooth + 6 GHz WLAN MIMO	Yes <sup>A</sup>	Yes	N/A	Yes	<sup>A</sup> Bluetooth Tethering is considered
57	LTE + NR + 2.4 GHz Bluetooth MIMO + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
58	NR + 2.4 GHz WLAN	Yes	Yes	Yes	Yes	
59	NR + 2.4 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
60	NR + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
61	NR + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
62	NR + 2.4 GHz Bluetooth	Yes <sup>A</sup>	Yes	Yes <sup>A</sup>	Yes	<sup>A</sup> Bluetooth Tethering is considered
63	NR + 2.4 GHz Bluetooth MIMO	Yes	Yes	Yes	Yes	
64	NR + 2.4 GHz WLAN + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
65	NR + 2.4 GHz WLAN MIMO + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
66	NR + 2.4 GHz WLAN + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
67	NR + 2.4 GHz WLAN MIMO + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
68	NR + 2.4 GHz Bluetooth + 5 GHz WLAN MIMO	Yes <sup>A</sup>	Yes	Yes <sup>A</sup>	Yes	<sup>A</sup> Bluetooth Tethering is considered
69	NR + 2.4 GHz Bluetooth MIMO + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
70	NR + 2.4 GHz Bluetooth + 6 GHz WLAN MIMO	Yes <sup>A</sup>	Yes	N/A	Yes	<sup>A</sup> Bluetooth Tethering is considered
71	NR + 2.4 GHz Bluetooth MIMO + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
72	GPRS/EDGE + 2.4 GHz WLAN	N/A	N/A	Yes	Yes	
73	GPRS/EDGE + 2.4 GHz WLAN MIMO	N/A	N/A	Yes	Yes	
74	GPRS/EDGE + 5 GHz WLAN MIMO	N/A	N/A	Yes	Yes	
75	GPRS/EDGE + 6 GHz WLAN MIMO	N/A	N/A	N/A	Yes	
76	GPRS/EDGE + 2.4 GHz Bluetooth	N/A	N/A	Yes <sup>A</sup>	Yes	<sup>A</sup> Bluetooth Tethering is considered
77	GPRS/EDGE + 2.4 GHz Bluetooth MIMO	N/A	N/A	Yes	Yes	
78	GPRS/EDGE + 2.4 GHz WLAN + 5 GHz WLAN MIMO	N/A	N/A	Yes	Yes	
79	GPRS/EDGE + 2.4 GHz WLAN MIMO + 5 GHz WLAN MIMO	N/A	N/A	Yes	Yes	
80	GPRS/EDGE + 2.4 GHz WLAN + 6 GHz WLAN MIMO	N/A	N/A	N/A	Yes	
81	GPRS/EDGE + 2.4 GHz WLAN MIMO + 6 GHz WLAN MIMO	N/A	N/A	N/A	Yes	
82	GPRS/EDGE + 2.4 GHz Bluetooth + 5 GHz WLAN MIMO	N/A	N/A	Yes <sup>A</sup>	Yes	<sup>A</sup> Bluetooth Tethering is considered
83	GPRS/EDGE + 2.4 GHz Bluetooth MIMO + 5 GHz WLAN MIMO	N/A	N/A	Yes	Yes	
84	GPRS/EDGE + 2.4 GHz Bluetooth + 6 GHz WLAN MIMO	N/A	N/A	N/A	Yes	
85	GPRS/EDGE + 2.4 GHz Bluetooth MIMO + 6 GHz WLAN MIMO	N/A	N/A	N/A	Yes	

FCC ID: A3LSMS908U	 PCTEST Proud to be part of 	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2112090152-01.A3L	Test Dates: 10/31/21 - 11/15/21	DUT Type: Portable Handset		Page 9 of 35

1. 2.4 GHz WLAN and 2.4 GHz Bluetooth share the same antenna path and cannot transmit simultaneously.
2. 5 GHz WLAN and 6 GHz WLAN share the same antenna path and cannot transmit simultaneously.
3. When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
4. Per the manufacturer, WIFI Direct is not expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Therefore, there are no simultaneous transmission scenarios involving WIFI direct beyond that listed in the above table.
5. 5 GHz Wireless Router is only supported for the U-NII-3 by S/W, therefore U-NII-1, U-NII-2A, U-NII-2C, and U-NII-4 were not evaluated for wireless router conditions.
6. 6 GHz Wireless Router is not supported, therefore it was not evaluated for wireless router conditions.
7. This device supports 2x2 MIMO Tx for WLAN 802.11a/b/g/n/ac/ax. 802.11a/b/g/n/ac/ax supports CDD and STBC and 802.11n/ac/ax additionally supports SDM. WLAN can transmit only when operating with MIMO.
8. This device supports VoWIFI.
9. This device supports Bluetooth Tethering in SISO Mode.
10. This device supports VoLTE.
11. This device supports VoNR.
12. LTE + 5G NR FR1 Scenarios are limited to EN-DC combinations with anchor bands as shown in the NR FR1 checklist.
13. 5G NR FR2 n258, n260, and n261 cannot transmit simultaneously.
14. LTE + 5G NR FR2 Scenarios are limited to EN-DC combinations with anchor bands as shown in the NR FR2 checklist.

## 1.8 Miscellaneous SAR Test Considerations

### (A) WIFI/BT

There were no changes made to the WIFI and BT operations within this device. Please see original filing for complete evaluation of these operating modes.

### (B) Licensed Transmitter(s)




Only operations relevant to this permissive change were evaluated for compliance. Please see original filing for complete evaluation for all other operating modes. The operational description includes a description of all changed items.

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg.

This device supports NR capabilities with overlapping transmission frequency ranges. When the supported frequency range of an NR Band falls completely within an NR band with a larger transmission frequency range, both NR bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both NR bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.

NR implementation supports SA and NSA mode. In EN-DC mode, NR operates with the LTE Bands shown in the NR FR1 checklist acting as anchor bands. Per FCC guidance, SAR tests for NR Bands and LTE Anchor Bands were performed separately due to limitations in SAR probe calibration factors.

SRS was tested with CW signal per Qualcomm guidance in 80-w2112-4.

FCC ID: A3LSMS908U	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2112090152-01.A3L	<b>Test Dates:</b> 10/31/21 - 11/15/21	<b>DUT Type:</b> Portable Handset	Page 10 of 35	

## 1.9 Guidance Applied




- IEEE 1528-2013
- FCC KDB Publication 941225 D01v03r01, D05v02r04, D05Av01r02, D06v02r01 (2G/3G/4G and Hotspot)
- FCC KDB Publication 248227 D01v02r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v06 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 648474 D04v01r03 (Phablet Procedures)
- FCC KDB Publication 616217 D04v01r02 (Proximity Sensor)

## 1.10 Device Serial Numbers



Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 11.

## 1.11 Bibliography



Report Type	Report Serial Number
RF Exposure Part 0 Test Report	1M2112090152-04.A3L
Original RF Exposure Part 1 Test Report	1M2109090102-01(Rev1).A3L

FCC ID: A3LSMS908U	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2112090152-01.A3L	<b>Test Dates:</b> 10/31/21 - 11/15/21	<b>DUT Type:</b> Portable Handset	Page 11 of 35	

LTE Information																																																																																																																																																																																																																																																																																																																																																																																																																																								
Form Factor	Portable Handset																																																																																																																																																																																																																																																																																																																																																																																																																																							
Frequency Range of each LTE transmission band	LTE Band 71 (665.5 - 695.5 MHz)																																																																																																																																																																																																																																																																																																																																																																																																																																							
	LTE Band 12 (699.7 - 715.3 MHz)																																																																																																																																																																																																																																																																																																																																																																																																																																							
	LTE Band 13 (779.5 - 784.5 MHz)																																																																																																																																																																																																																																																																																																																																																																																																																																							
	LTE Band 14 (790.5 - 795.5 MHz)																																																																																																																																																																																																																																																																																																																																																																																																																																							
	LTE Band 26 (Cell) (814.7 - 848.3 MHz)																																																																																																																																																																																																																																																																																																																																																																																																																																							
	LTE Band 5 (Cell) (824.7 - 848.3 MHz)																																																																																																																																																																																																																																																																																																																																																																																																																																							
	LTE Band 66 (AWS) (1710.7 - 1779.5 MHz)																																																																																																																																																																																																																																																																																																																																																																																																																																							
	LTE Band 4 (AWS) (1710.7 - 1754.3 MHz)																																																																																																																																																																																																																																																																																																																																																																																																																																							
	LTE Band 25 (PCS) (1850.7 - 1914.3 MHz)																																																																																																																																																																																																																																																																																																																																																																																																																																							
	LTE Band 2 (PCS) (1850.7 - 1909.3 MHz)																																																																																																																																																																																																																																																																																																																																																																																																																																							
	LTE Band 30 (2307.5 - 2312.5 MHz)																																																																																																																																																																																																																																																																																																																																																																																																																																							
	LTE Band 7 (2502.5 - 2567.5 MHz)																																																																																																																																																																																																																																																																																																																																																																																																																																							
	LTE Band 48 (2552.5 - 2697.5 MHz)																																																																																																																																																																																																																																																																																																																																																																																																																																							
	LTE Band 41 (2498.5 - 2697.5 MHz)																																																																																																																																																																																																																																																																																																																																																																																																																																							
	LTE Band 38 (2572.5 - 2617.5 MHz)																																																																																																																																																																																																																																																																																																																																																																																																																																							
Channel Bandwidths	LTE Band 71: 5 MHz, 10 MHz, 15 MHz, 20 MHz																																																																																																																																																																																																																																																																																																																																																																																																																																							
	LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz																																																																																																																																																																																																																																																																																																																																																																																																																																							
	LTE Band 13: 5 MHz, 10 MHz																																																																																																																																																																																																																																																																																																																																																																																																																																							
	LTE Band 14: 5 MHz, 10 MHz																																																																																																																																																																																																																																																																																																																																																																																																																																							
	LTE Band 26 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz																																																																																																																																																																																																																																																																																																																																																																																																																																							
	LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz																																																																																																																																																																																																																																																																																																																																																																																																																																							
	LTE Band 66 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz																																																																																																																																																																																																																																																																																																																																																																																																																																							
	LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz																																																																																																																																																																																																																																																																																																																																																																																																																																							
	LTE Band 25 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz																																																																																																																																																																																																																																																																																																																																																																																																																																							
	LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz																																																																																																																																																																																																																																																																																																																																																																																																																																							
	LTE Band 30: 5 MHz, 10 MHz																																																																																																																																																																																																																																																																																																																																																																																																																																							
	LTE Band 7: 5 MHz, 10 MHz, 15 MHz, 20 MHz																																																																																																																																																																																																																																																																																																																																																																																																																																							
	LTE Band 48: 5 MHz, 10 MHz, 15 MHz, 20 MHz																																																																																																																																																																																																																																																																																																																																																																																																																																							
	LTE Band 41: 5 MHz, 10 MHz, 15 MHz, 20 MHz																																																																																																																																																																																																																																																																																																																																																																																																																																							
	LTE Band 38: 5 MHz, 10 MHz, 15 MHz, 20 MHz																																																																																																																																																																																																																																																																																																																																																																																																																																							
Channel Numbers and Frequencies (MHz)	Low	Low-Mid	Mid	Mid-High	High																																																																																																																																																																																																																																																																																																																																																																																																																																			
	<table border="1"> <tbody> <tr><td>LTE Band 71: 5 MHz</td><td>665.5 (133147)</td><td></td><td>680.5 (133297)</td><td></td><td>695.5 (133447)</td></tr> <tr><td>LTE Band 71: 10 MHz</td><td>668 (133172)</td><td></td><td>680.5 (133297)</td><td></td><td>693 (133422)</td></tr> <tr><td>LTE Band 71: 15 MHz</td><td>670.5 (133197)</td><td></td><td>680.5 (133297)</td><td></td><td>690.5 (133397)</td></tr> <tr><td>LTE Band 71: 20 MHz</td><td>673 (133222)</td><td></td><td>680.5 (133297)</td><td></td><td>688 (133372)</td></tr> <tr><td>LTE Band 12: 1.4 MHz</td><td>699.7 (23017)</td><td></td><td>707.5 (23095)</td><td></td><td>715.3 (23173)</td></tr> <tr><td>LTE Band 12: 3 MHz</td><td>700.5 (23025)</td><td></td><td>707.5 (23095)</td><td></td><td>714.5 (23165)</td></tr> <tr><td>LTE Band 12: 5 MHz</td><td>701.5 (23035)</td><td></td><td>707.5 (23095)</td><td></td><td>713.5 (23155)</td></tr> <tr><td>LTE Band 12: 10 MHz</td><td>704 (23060)</td><td></td><td>707.5 (23095)</td><td></td><td>711 (23130)</td></tr> <tr><td>LTE Band 13: 5 MHz</td><td>779.5 (23205)</td><td></td><td>782 (23230)</td><td></td><td>784.5 (23255)</td></tr> <tr><td>LTE Band 13: 10 MHz</td><td>N/A</td><td></td><td>782 (23230)</td><td></td><td>N/A</td></tr> <tr><td>LTE Band 14: 5 MHz</td><td>790.5 (23305)</td><td></td><td>795 (23330)</td><td></td><td>795.5 (23355)</td></tr> <tr><td>LTE Band 14: 10 MHz</td><td>N/A</td><td></td><td>793 (23330)</td><td></td><td>N/A</td></tr> <tr><td>LTE Band 26 (Cell): 1.4 MHz</td><td>814.7 (26697)</td><td></td><td>831.5 (26865)</td><td></td><td>848.3 (27033)</td></tr> <tr><td>LTE Band 26 (Cell): 3 MHz</td><td>815.5 (26705)</td><td></td><td>831.5 (26865)</td><td></td><td>847.5 (27025)</td></tr> <tr><td>LTE Band 26 (Cell): 5 MHz</td><td>816.5 (26715)</td><td></td><td>831.5 (26865)</td><td></td><td>846.5 (27015)</td></tr> <tr><td>LTE Band 26 (Cell): 10 MHz</td><td>819 (26740)</td><td></td><td>831.5 (26865)</td><td></td><td>844 (26990)</td></tr> <tr><td>LTE Band 26 (Cell): 15 MHz</td><td>821.5 (26765)</td><td></td><td>831.5 (26865)</td><td></td><td>841.5 (26965)</td></tr> <tr><td>LTE Band 5 (Cell): 1.4 MHz</td><td>824.7 (23407)</td><td></td><td>836.5 (23525)</td><td></td><td>848.3 (23643)</td></tr> <tr><td>LTE Band 5 (Cell): 3 MHz</td><td>825.5 (23415)</td><td></td><td>836.5 (23525)</td><td></td><td>847.5 (23635)</td></tr> <tr><td>LTE Band 5 (Cell): 5 MHz</td><td>826.5 (23425)</td><td></td><td>836.5 (23525)</td><td></td><td>846.5 (23625)</td></tr> <tr><td>LTE Band 5 (Cell): 10 MHz</td><td>829 (23450)</td><td></td><td>836.5 (23525)</td><td></td><td>844 (23600)</td></tr> <tr><td>LTE Band 66 (AWS): 1.4 MHz</td><td>1710.7 (131979)</td><td></td><td>1745 (132322)</td><td></td><td>1779.5 (132665)</td></tr> <tr><td>LTE Band 66 (AWS): 3 MHz</td><td>1711.5 (131987)</td><td></td><td>1745 (132322)</td><td></td><td>1778.5 (132657)</td></tr> <tr><td>LTE Band 66 (AWS): 5 MHz</td><td>1712.5 (131997)</td><td></td><td>1745 (132322)</td><td></td><td>1777.5 (132647)</td></tr> <tr><td>LTE Band 66 (AWS): 10 MHz</td><td>1715 (132022)</td><td></td><td>1745 (132322)</td><td></td><td>1775 (132622)</td></tr> <tr><td>LTE Band 66 (AWS): 15 MHz</td><td>1717.5 (132047)</td><td></td><td>1745 (132322)</td><td></td><td>1772.5 (132597)</td></tr> <tr><td>LTE Band 66 (AWS): 20 MHz</td><td>1720 (132072)</td><td></td><td>1745 (132322)</td><td></td><td>1770 (132572)</td></tr> <tr><td>LTE Band 4 (AWS): 1.4 MHz</td><td>1710.7 (19957)</td><td></td><td>1732.5 (20175)</td><td></td><td>1754.3 (20393)</td></tr> <tr><td>LTE Band 4 (AWS): 3 MHz</td><td>1711.5 (19965)</td><td></td><td>1732.5 (20175)</td><td></td><td>1753.5 (20385)</td></tr> <tr><td>LTE Band 4 (AWS): 5 MHz</td><td>1712.5 (19975)</td><td></td><td>1732.5 (20175)</td><td></td><td>1752.5 (20375)</td></tr> <tr><td>LTE Band 4 (AWS): 10 MHz</td><td>1715 (20000)</td><td></td><td>1732.5 (20175)</td><td></td><td>1750 (20350)</td></tr> <tr><td>LTE Band 4 (AWS): 15 MHz</td><td>1717.5 (20025)</td><td></td><td>1732.5 (20175)</td><td></td><td>1747.5 (20325)</td></tr> <tr><td>LTE Band 4 (AWS): 20 MHz</td><td>1720 (20050)</td><td></td><td>1732.5 (20175)</td><td></td><td>1745 (20300)</td></tr> <tr><td>LTE Band 25 (PCS): 1.4 MHz</td><td>1850.7 (26047)</td><td></td><td>1882.5 (26365)</td><td></td><td>1914.3 (26683)</td></tr> <tr><td>LTE Band 25 (PCS): 3 MHz</td><td>1851.5 (26055)</td><td></td><td>1882.5 (26365)</td><td></td><td>1913.5 (26675)</td></tr> <tr><td>LTE Band 25 (PCS): 5 MHz</td><td>1852.5 (26065)</td><td></td><td>1882.5 (26365)</td><td></td><td>1912.5 (26665)</td></tr> <tr><td>LTE Band 25 (PCS): 10 MHz</td><td>1855 (26090)</td><td></td><td>1882.5 (26365)</td><td></td><td>1910 (26640)</td></tr> <tr><td>LTE Band 25 (PCS): 15 MHz</td><td>1857.5 (26115)</td><td></td><td>1882.5 (26365)</td><td></td><td>1907.5 (26615)</td></tr> <tr><td>LTE Band 25 (PCS): 20 MHz</td><td>1860 (26140)</td><td></td><td>1882.5 (26365)</td><td></td><td>1905 (26590)</td></tr> <tr><td>LTE Band 2 (PCS): 1.4 MHz</td><td>1850.7 (18607)</td><td></td><td>1880 (18900)</td><td></td><td>1908.3 (19193)</td></tr> <tr><td>LTE Band 2 (PCS): 3 MHz</td><td>1851.5 (18615)</td><td></td><td>1880 (18900)</td><td></td><td>1908.5 (19185)</td></tr> <tr><td>LTE Band 2 (PCS): 5 MHz</td><td>1852.5 (18625)</td><td></td><td>1880 (18900)</td><td></td><td>1907.5 (19175)</td></tr> <tr><td>LTE Band 2 (PCS): 10 MHz</td><td>1855 (18650)</td><td></td><td>1880 (18900)</td><td></td><td>1905 (19150)</td></tr> <tr><td>LTE Band 2 (PCS): 15 MHz</td><td>1857.5 (18675)</td><td></td><td>1880 (18900)</td><td></td><td>1902.5 (19125)</td></tr> <tr><td>LTE Band 2 (PCS): 20 MHz</td><td>1860 (18700)</td><td></td><td>1880 (18900)</td><td></td><td>1900 (19100)</td></tr> <tr><td>LTE Band 30: 5 MHz</td><td>2307.5 (27695)</td><td></td><td>2310 (27710)</td><td></td><td>2312.5 (27735)</td></tr> <tr><td>LTE Band 30: 10 MHz</td><td>N/A</td><td></td><td>2310 (27710)</td><td></td><td>N/A</td></tr> <tr><td>LTE Band 7: 5 MHz</td><td>2502.5 (20775)</td><td></td><td>2535 (21100)</td><td></td><td>2567.5 (21425)</td></tr> <tr><td>LTE Band 7: 10 MHz</td><td>2505 (20800)</td><td></td><td>2535 (21100)</td><td></td><td>2565 (21400)</td></tr> <tr><td>LTE Band 7: 15 MHz</td><td>2507.5 (20825)</td><td></td><td>2535 (21100)</td><td></td><td>2562.5 (21375)</td></tr> <tr><td>LTE Band 7: 20 MHz</td><td>2510 (20850)</td><td></td><td>2535 (21100)</td><td></td><td>2560 (21350)</td></tr> <tr><td>LTE Band 48: 5 MHz</td><td>3552.5 (55265)</td><td>3600.8 (55748)</td><td>N/A</td><td>3649.2 (56232)</td><td>3697.5 (56715)</td></tr> <tr><td>LTE Band 48: 10 MHz</td><td>3555 (55290)</td><td>3601.7 (55757)</td><td>N/A</td><td>3648.3 (56223)</td><td>3695 (56690)</td></tr> <tr><td>LTE Band 48: 15 MHz</td><td>3557.5 (55315)</td><td>3602.5 (55765)</td><td>N/A</td><td>3647.5 (56215)</td><td>3692.5 (56665)</td></tr> <tr><td>LTE Band 48: 20 MHz</td><td>3560 (55340)</td><td>3603.3 (55773)</td><td>N/A</td><td>3646.7 (56207)</td><td>3690 (56640)</td></tr> <tr><td>LTE Band 41: 5 MHz</td><td>2506 (39750)</td><td>2549.5 (40185)</td><td>2593 (40620)</td><td>2636.5 (41055)</td><td>2680 (41490)</td></tr> <tr><td>LTE Band 41: 10 MHz</td><td>2508 (39750)</td><td>2549.5 (40185)</td><td>2593 (40620)</td><td>2636.5 (41055)</td><td>2680 (41490)</td></tr> <tr><td>LTE Band 41: 15 MHz</td><td>2506 (39750)</td><td>2549.5 (40185)</td><td>2593 (40620)</td><td>2636.5 (41055)</td><td>2680 (41490)</td></tr> <tr><td>LTE Band 41: 20 MHz</td><td>2506 (39750)</td><td>2549.5 (40185)</td><td>2593 (40620)</td><td>2636.5 (41055)</td><td>2680 (41490)</td></tr> <tr><td>LTE Band 38: 5 MHz</td><td>2572.5 (37775)</td><td></td><td>2595 (38000)</td><td></td><td>2617.5 (38225)</td></tr> <tr><td>LTE Band 38: 10 MHz</td><td>2575 (37800)</td><td></td><td>2595 (38000)</td><td></td><td>2615 (38200)</td></tr> <tr><td>LTE Band 38: 15 MHz</td><td>2577.5 (37825)</td><td></td><td>2595 (38000)</td><td></td><td>2612.5 (38175)</td></tr> <tr><td>LTE Band 38: 20 MHz</td><td>2580 (37850)</td><td></td><td>2595 (38000)</td><td></td><td>2610 (38150)</td></tr> <tr> <td>UE Category</td> <td colspan="5">DL UE Cat 20, UL UE Cat 18</td> </tr> <tr> <td>Modulations Supported in UL</td> <td colspan="5">QPSK, 16QAM, 64QAM, 256QAM</td> </tr> <tr> <td>Modulations Supported in DL</td> <td colspan="5">QPSK, 16QAM, 64QAM, 256QAM</td> </tr> <tr> <td>LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)</td> <td colspan="5">YES</td> </tr> <tr> <td>A-MPR (Additional MPR) disabled for SAR Testing?</td> <td colspan="5">YES</td> </tr> <tr> <td>LTE Carrier Aggregation Possible Combinations</td> <td colspan="5">The technical description includes all the possible carrier aggregation combinations</td> </tr> <tr> <td>LTE Additional Information</td> <td colspan="5">This device does not support full CA features on 3GPP Release 16. It supports carrier aggregation, downlink MIMO, LAA features as shown in Section 9 and Appendix J. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. The following LTE Release 16 Features are not supported: Relay, HeNet, Enhanced MIMO, eICIC, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.</td> </tr> </tbody> </table>					LTE Band 71: 5 MHz	665.5 (133147)		680.5 (133297)		695.5 (133447)	LTE Band 71: 10 MHz	668 (133172)		680.5 (133297)		693 (133422)	LTE Band 71: 15 MHz	670.5 (133197)		680.5 (133297)		690.5 (133397)	LTE Band 71: 20 MHz	673 (133222)		680.5 (133297)		688 (133372)	LTE Band 12: 1.4 MHz	699.7 (23017)		707.5 (23095)		715.3 (23173)	LTE Band 12: 3 MHz	700.5 (23025)		707.5 (23095)		714.5 (23165)	LTE Band 12: 5 MHz	701.5 (23035)		707.5 (23095)		713.5 (23155)	LTE Band 12: 10 MHz	704 (23060)		707.5 (23095)		711 (23130)	LTE Band 13: 5 MHz	779.5 (23205)		782 (23230)		784.5 (23255)	LTE Band 13: 10 MHz	N/A		782 (23230)		N/A	LTE Band 14: 5 MHz	790.5 (23305)		795 (23330)		795.5 (23355)	LTE Band 14: 10 MHz	N/A		793 (23330)		N/A	LTE Band 26 (Cell): 1.4 MHz	814.7 (26697)		831.5 (26865)		848.3 (27033)	LTE Band 26 (Cell): 3 MHz	815.5 (26705)		831.5 (26865)		847.5 (27025)	LTE Band 26 (Cell): 5 MHz	816.5 (26715)		831.5 (26865)		846.5 (27015)	LTE Band 26 (Cell): 10 MHz	819 (26740)		831.5 (26865)		844 (26990)	LTE Band 26 (Cell): 15 MHz	821.5 (26765)		831.5 (26865)		841.5 (26965)	LTE Band 5 (Cell): 1.4 MHz	824.7 (23407)		836.5 (23525)		848.3 (23643)	LTE Band 5 (Cell): 3 MHz	825.5 (23415)		836.5 (23525)		847.5 (23635)	LTE Band 5 (Cell): 5 MHz	826.5 (23425)		836.5 (23525)		846.5 (23625)	LTE Band 5 (Cell): 10 MHz	829 (23450)		836.5 (23525)		844 (23600)	LTE Band 66 (AWS): 1.4 MHz	1710.7 (131979)		1745 (132322)		1779.5 (132665)	LTE Band 66 (AWS): 3 MHz	1711.5 (131987)		1745 (132322)		1778.5 (132657)	LTE Band 66 (AWS): 5 MHz	1712.5 (131997)		1745 (132322)		1777.5 (132647)	LTE Band 66 (AWS): 10 MHz	1715 (132022)		1745 (132322)		1775 (132622)	LTE Band 66 (AWS): 15 MHz	1717.5 (132047)		1745 (132322)		1772.5 (132597)	LTE Band 66 (AWS): 20 MHz	1720 (132072)		1745 (132322)		1770 (132572)	LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)		1732.5 (20175)		1754.3 (20393)	LTE Band 4 (AWS): 3 MHz	1711.5 (19965)		1732.5 (20175)		1753.5 (20385)	LTE Band 4 (AWS): 5 MHz	1712.5 (19975)		1732.5 (20175)		1752.5 (20375)	LTE Band 4 (AWS): 10 MHz	1715 (20000)		1732.5 (20175)		1750 (20350)	LTE Band 4 (AWS): 15 MHz	1717.5 (20025)		1732.5 (20175)		1747.5 (20325)	LTE Band 4 (AWS): 20 MHz	1720 (20050)		1732.5 (20175)		1745 (20300)	LTE Band 25 (PCS): 1.4 MHz	1850.7 (26047)		1882.5 (26365)		1914.3 (26683)	LTE Band 25 (PCS): 3 MHz	1851.5 (26055)		1882.5 (26365)		1913.5 (26675)	LTE Band 25 (PCS): 5 MHz	1852.5 (26065)		1882.5 (26365)		1912.5 (26665)	LTE Band 25 (PCS): 10 MHz	1855 (26090)		1882.5 (26365)		1910 (26640)	LTE Band 25 (PCS): 15 MHz	1857.5 (26115)		1882.5 (26365)		1907.5 (26615)	LTE Band 25 (PCS): 20 MHz	1860 (26140)		1882.5 (26365)		1905 (26590)	LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)		1880 (18900)		1908.3 (19193)	LTE Band 2 (PCS): 3 MHz	1851.5 (18615)		1880 (18900)		1908.5 (19185)	LTE Band 2 (PCS): 5 MHz	1852.5 (18625)		1880 (18900)		1907.5 (19175)	LTE Band 2 (PCS): 10 MHz	1855 (18650)		1880 (18900)		1905 (19150)	LTE Band 2 (PCS): 15 MHz	1857.5 (18675)		1880 (18900)		1902.5 (19125)	LTE Band 2 (PCS): 20 MHz	1860 (18700)		1880 (18900)		1900 (19100)	LTE Band 30: 5 MHz	2307.5 (27695)		2310 (27710)		2312.5 (27735)	LTE Band 30: 10 MHz	N/A		2310 (27710)		N/A	LTE Band 7: 5 MHz	2502.5 (20775)		2535 (21100)		2567.5 (21425)	LTE Band 7: 10 MHz	2505 (20800)		2535 (21100)		2565 (21400)	LTE Band 7: 15 MHz	2507.5 (20825)		2535 (21100)		2562.5 (21375)	LTE Band 7: 20 MHz	2510 (20850)		2535 (21100)		2560 (21350)	LTE Band 48: 5 MHz	3552.5 (55265)	3600.8 (55748)	N/A	3649.2 (56232)	3697.5 (56715)	LTE Band 48: 10 MHz	3555 (55290)	3601.7 (55757)	N/A	3648.3 (56223)	3695 (56690)	LTE Band 48: 15 MHz	3557.5 (55315)	3602.5 (55765)	N/A	3647.5 (56215)	3692.5 (56665)	LTE Band 48: 20 MHz	3560 (55340)	3603.3 (55773)	N/A	3646.7 (56207)	3690 (56640)	LTE Band 41: 5 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)	LTE Band 41: 10 MHz	2508 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)	LTE Band 41: 15 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)	LTE Band 41: 20 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)	LTE Band 38: 5 MHz	2572.5 (37775)		2595 (38000)		2617.5 (38225)	LTE Band 38: 10 MHz	2575 (37800)		2595 (38000)		2615 (38200)	LTE Band 38: 15 MHz	2577.5 (37825)		2595 (38000)		2612.5 (38175)	LTE Band 38: 20 MHz	2580 (37850)		2595 (38000)		2610 (38150)	UE Category	DL UE Cat 20, UL UE Cat 18					Modulations Supported in UL	QPSK, 16QAM, 64QAM, 256QAM					Modulations Supported in DL	QPSK, 16QAM, 64QAM, 256QAM					LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)	YES					A-MPR (Additional MPR) disabled for SAR Testing?	YES					LTE Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations					LTE Additional Information	This device does not support full CA features on 3GPP Release 16. It supports carrier aggregation, downlink MIMO, LAA features as shown in Section 9 and Appendix J. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. The following LTE Release 16 Features are not supported: Relay, HeNet, Enhanced MIMO, eICIC, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.			
LTE Band 71: 5 MHz	665.5 (133147)		680.5 (133297)		695.5 (133447)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 71: 10 MHz	668 (133172)		680.5 (133297)		693 (133422)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 71: 15 MHz	670.5 (133197)		680.5 (133297)		690.5 (133397)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 71: 20 MHz	673 (133222)		680.5 (133297)		688 (133372)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 12: 1.4 MHz	699.7 (23017)		707.5 (23095)		715.3 (23173)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 12: 3 MHz	700.5 (23025)		707.5 (23095)		714.5 (23165)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 12: 5 MHz	701.5 (23035)		707.5 (23095)		713.5 (23155)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 12: 10 MHz	704 (23060)		707.5 (23095)		711 (23130)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 13: 5 MHz	779.5 (23205)		782 (23230)		784.5 (23255)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 13: 10 MHz	N/A		782 (23230)		N/A																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 14: 5 MHz	790.5 (23305)		795 (23330)		795.5 (23355)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 14: 10 MHz	N/A		793 (23330)		N/A																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 26 (Cell): 1.4 MHz	814.7 (26697)		831.5 (26865)		848.3 (27033)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 26 (Cell): 3 MHz	815.5 (26705)		831.5 (26865)		847.5 (27025)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 26 (Cell): 5 MHz	816.5 (26715)		831.5 (26865)		846.5 (27015)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 26 (Cell): 10 MHz	819 (26740)		831.5 (26865)		844 (26990)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 26 (Cell): 15 MHz	821.5 (26765)		831.5 (26865)		841.5 (26965)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 5 (Cell): 1.4 MHz	824.7 (23407)		836.5 (23525)		848.3 (23643)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 5 (Cell): 3 MHz	825.5 (23415)		836.5 (23525)		847.5 (23635)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 5 (Cell): 5 MHz	826.5 (23425)		836.5 (23525)		846.5 (23625)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 5 (Cell): 10 MHz	829 (23450)		836.5 (23525)		844 (23600)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 66 (AWS): 1.4 MHz	1710.7 (131979)		1745 (132322)		1779.5 (132665)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 66 (AWS): 3 MHz	1711.5 (131987)		1745 (132322)		1778.5 (132657)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 66 (AWS): 5 MHz	1712.5 (131997)		1745 (132322)		1777.5 (132647)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 66 (AWS): 10 MHz	1715 (132022)		1745 (132322)		1775 (132622)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 66 (AWS): 15 MHz	1717.5 (132047)		1745 (132322)		1772.5 (132597)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 66 (AWS): 20 MHz	1720 (132072)		1745 (132322)		1770 (132572)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)		1732.5 (20175)		1754.3 (20393)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)		1732.5 (20175)		1753.5 (20385)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)		1732.5 (20175)		1752.5 (20375)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 4 (AWS): 10 MHz	1715 (20000)		1732.5 (20175)		1750 (20350)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)		1732.5 (20175)		1747.5 (20325)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 4 (AWS): 20 MHz	1720 (20050)		1732.5 (20175)		1745 (20300)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 25 (PCS): 1.4 MHz	1850.7 (26047)		1882.5 (26365)		1914.3 (26683)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 25 (PCS): 3 MHz	1851.5 (26055)		1882.5 (26365)		1913.5 (26675)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 25 (PCS): 5 MHz	1852.5 (26065)		1882.5 (26365)		1912.5 (26665)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 25 (PCS): 10 MHz	1855 (26090)		1882.5 (26365)		1910 (26640)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 25 (PCS): 15 MHz	1857.5 (26115)		1882.5 (26365)		1907.5 (26615)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 25 (PCS): 20 MHz	1860 (26140)		1882.5 (26365)		1905 (26590)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)		1880 (18900)		1908.3 (19193)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)		1880 (18900)		1908.5 (19185)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)		1880 (18900)		1907.5 (19175)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 2 (PCS): 10 MHz	1855 (18650)		1880 (18900)		1905 (19150)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)		1880 (18900)		1902.5 (19125)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 2 (PCS): 20 MHz	1860 (18700)		1880 (18900)		1900 (19100)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 30: 5 MHz	2307.5 (27695)		2310 (27710)		2312.5 (27735)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 30: 10 MHz	N/A		2310 (27710)		N/A																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 7: 5 MHz	2502.5 (20775)		2535 (21100)		2567.5 (21425)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 7: 10 MHz	2505 (20800)		2535 (21100)		2565 (21400)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 7: 15 MHz	2507.5 (20825)		2535 (21100)		2562.5 (21375)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 7: 20 MHz	2510 (20850)		2535 (21100)		2560 (21350)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 48: 5 MHz	3552.5 (55265)	3600.8 (55748)	N/A	3649.2 (56232)	3697.5 (56715)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 48: 10 MHz	3555 (55290)	3601.7 (55757)	N/A	3648.3 (56223)	3695 (56690)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 48: 15 MHz	3557.5 (55315)	3602.5 (55765)	N/A	3647.5 (56215)	3692.5 (56665)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 48: 20 MHz	3560 (55340)	3603.3 (55773)	N/A	3646.7 (56207)	3690 (56640)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 41: 5 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 41: 10 MHz	2508 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 41: 15 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 41: 20 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 38: 5 MHz	2572.5 (37775)		2595 (38000)		2617.5 (38225)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 38: 10 MHz	2575 (37800)		2595 (38000)		2615 (38200)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 38: 15 MHz	2577.5 (37825)		2595 (38000)		2612.5 (38175)																																																																																																																																																																																																																																																																																																																																																																																																																																			
LTE Band 38: 20 MHz	2580 (37850)		2595 (38000)		2610 (38150)																																																																																																																																																																																																																																																																																																																																																																																																																																			
UE Category	DL UE Cat 20, UL UE Cat 18																																																																																																																																																																																																																																																																																																																																																																																																																																							
Modulations Supported in UL	QPSK, 16QAM, 64QAM, 256QAM																																																																																																																																																																																																																																																																																																																																																																																																																																							
Modulations Supported in DL	QPSK, 16QAM, 64QAM, 256QAM																																																																																																																																																																																																																																																																																																																																																																																																																																							
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)	YES																																																																																																																																																																																																																																																																																																																																																																																																																																							
A-MPR (Additional MPR) disabled for SAR Testing?	YES																																																																																																																																																																																																																																																																																																																																																																																																																																							
LTE Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations																																																																																																																																																																																																																																																																																																																																																																																																																																							
LTE Additional Information	This device does not support full CA features on 3GPP Release 16. It supports carrier aggregation, downlink MIMO, LAA features as shown in Section 9 and Appendix J. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. The following LTE Release 16 Features are not supported: Relay, HeNet, Enhanced MIMO, eICIC, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																																																																																																																																																																																																																																																																																																																																																																																																							

FCC ID: A3LSMS908U		SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1M2112090152-01.A3L	Test Dates: 10/31/21 - 11/15/21	DUT Type: Portable Handset		Page 12 of 35	

NR Information	
Form Factor	Portable Handset
Frequency Range of each NR transmission band	NR Band n71 (665.5 - 685.5 MHz) NR Band n12 (701.5 - 713.5 MHz) NR Band n5 (Cell) (826.5 - 846.5 MHz) NR Band n66 (AWS) (1712.5 - 1777.5 MHz) NR Band n25 (PCS) (1852.5 - 1912.5 MHz) NR Band n2 (PCS) (1852.5 - 1907.5 MHz) NR Band n30 (2307.5 - 2312.5 MHz) NR Band n7 (2502.5 - 2567.5 MHz) NR Band n1 (2506.02 - 2679.99 MHz) NR Band n38 (2576.5 - 2615 MHz) NR Band n48 (3555 - 3694.98 MHz) NR Band n77 DoD (3455.01 - 3544.98 MHz) NR Band n77 (3705 - 3875 MHz)
Channel Bandwidths	NR Band n71: 5 MHz, 10 MHz, 15 MHz, 20 MHz NR Band n12: 5 MHz, 10 MHz, 15 MHz NR Band n5 (Cell): 5 MHz, 10 MHz, 15 MHz, 20 MHz NR Band n66 (AWS): 10 MHz, 15 MHz, 20 MHz, 30 MHz, 40 MHz NR Band n25 (PCS): 5 MHz, 10 MHz, 15 MHz, 20 MHz, 25 MHz, 30 MHz, 40 MHz NR Band n2 (PCS): 5 MHz, 10 MHz, 15 MHz, 20 MHz NR Band n30: 5 MHz, 10 MHz NR Band n7: 5 MHz, 10 MHz, 15 MHz, 20 MHz, 25 MHz, 30 MHz, 40 MHz NR Band n1: 20 MHz, 30 MHz, 40 MHz, 50 MHz, 60 MHz, 70 MHz, 80 MHz, 90 MHz, 100 MHz NR Band n38: 10 MHz, 15 MHz, 20 MHz, 30 MHz, 40 MHz NR Band n48: 10 MHz, 20 MHz, 30 MHz, 40 MHz NR Band n77 DoD: 10 MHz, 15 MHz, 20 MHz, 30 MHz, 40 MHz, 50 MHz, 60 MHz, 70 MHz, 80 MHz, 90 MHz, 100 MHz NR Band n77: 10 MHz, 15 MHz, 20 MHz, 30 MHz, 40 MHz, 50 MHz, 60 MHz, 70 MHz, 80 MHz, 90 MHz, 100 MHz
Channel Numbers and Frequencies (MHz)	NR Band n71: 5 MHz 665.5 (133147) 680.5 (136100) 695.5 (133447) NR Band n71: 10 MHz 668 (133600) 680.5 (136100) 693 (136000) NR Band n71: 15 MHz 670.5 (134100) 680.5 (136100) 690.5 (136100) NR Band n71: 20 MHz 673 (134600) 680.5 (136100) 693 (136100) NR Band n12: 5 MHz 701.5 (140300) 707.5 (141500) 713.5 (142700) NR Band n12: 10 MHz 704 (140800) 707.5 (141500) 711 (142200) NR Band n12: 15 MHz 706.5 (141300) 707.5 (141500) 708.5 (141700) NR Band n5 (Cell): 5 MHz 826.5 (165300) 836.5 (167300) 846.5 (169300) NR Band n5 (Cell): 10 MHz 829 (165800) 836.5 (167300) 844 (168800) NR Band n5 (Cell): 15 MHz 831.5 (166300) 836.5 (167300) 841.5 (168300) NR Band n5 (Cell): 20 MHz 834 (166800) 836.5 (167300) 839 (167800) NR Band n66 (AWS): 5 MHz 1712.5 (342500) 1745 (349000) 1777.5 (355500) NR Band n66 (AWS): 10 MHz 1715 (343000) 1745 (349000) 1775 (355000) NR Band n66 (AWS): 15 MHz 1717.5 (343500) 1745 (349000) 1772.5 (354500) NR Band n66 (AWS): 20 MHz 1720 (344000) 1745 (349000) 1770 (354000) NR Band n66 (AWS): 30 MHz 1725 (345000) 1745 (349000) 1765 (353000) NR Band n66 (AWS): 40 MHz 1730 (346000) 1745 (349000) 1760 (352000) NR Band n25 (PCS): 5 MHz 1852.5 (370500) 1852.5 (370500) 1912.5 (365500) NR Band n25 (PCS): 10 MHz 1855 (371000) 1852.5 (370500) 1910 (365000) NR Band n25 (PCS): 15 MHz 1857.5 (371500) 1852.5 (370500) 1907.5 (361500) NR Band n25 (PCS): 20 MHz 1860 (372000) 1852.5 (370500) 1905 (361000) NR Band n25 (PCS): 25 MHz 1862.5 (372500) 1852.5 (370500) 1902.5 (360500) NR Band n25 (PCS): 30 MHz 1865 (373000) 1852.5 (370500) 1900 (360000) NR Band n25 (PCS): 40 MHz 1870 (374000) 1852.5 (370500) 1895 (359000) NR Band n2 (PCS): 5 MHz 1852.5 (370500) 1880 (376000) 1907.5 (361500) NR Band n2 (PCS): 10 MHz 1855 (371000) 1880 (376000) 1905 (361000) NR Band n2 (PCS): 15 MHz 1857.5 (371500) 1880 (376000) 1902.5 (360500) NR Band n2 (PCS): 20 MHz 1860 (372000) 1880 (376000) 1900 (360000) NR Band n30: 5 MHz 2307.5 (461500) 2310 (462000) 2312.5 (462500) NR Band n30: 10 MHz N/A 2310 (462000) N/A NR Band n7: 5 MHz 2502.5 (500500) 2535 (507000) 2567.5 (513500) NR Band n7: 10 MHz 2505 (501000) 2535 (507000) 2565 (513000) NR Band n7: 15 MHz 2507.5 (501500) 2535 (507000) 2562.5 (512500) NR Band n7: 20 MHz 2510 (502000) 2535 (507000) 2560 (512000) NR Band n7: 25 MHz 2512.5 (502500) 2535 (507000) 2557.5 (511500) NR Band n7: 30 MHz 2515 (503000) 2535 (507000) 2555 (511000) NR Band n7: 40 MHz 2520 (504000) 2535 (507000) 2550 (510000) NR Band n41: 20 MHz 2508.02 (501204) 2549.49 (509898) 2592.99 (518598) 2636.49 (527298) 2679.99 (535998) NR Band n41: 30 MHz 2511 (502000) 2552.01 (510402) 2592.99 (518598) 2634 (526800) 2674.98 (534998) NR Band n41: 40 MHz 2516.01 (503002) 2567.04 (511406) N/A 2618.67 (521748) 2670 (534000) NR Band n41: 50 MHz 2521.02 (504204) 2592.99 (518598) 2644.99 (532998) NR Band n41: 60 MHz 2526 (505200) 2592.99 (518598) 2659.99 (531998) NR Band n41: 70 MHz 2531.01 (506202) N/A 2655 (531000) NR Band n41: 80 MHz 2536.02 (507204) N/A 2649.99 (529998) NR Band n41: 90 MHz 2541 (508200) N/A 2644.98 (528998) NR Band n41: 100 MHz 2546.01 (509202) 2592.99 (518598) 2640 (528000) NR Band n38: 10 MHz 2575 (515000) 2595 (519000) 2615 (523000) NR Band n38: 15 MHz 2577.5 (515500) 2594 (518000) 2612.5 (522500) NR Band n38: 20 MHz 2580 (516000) 2595 (519000) 2560 (512000) NR Band n38: 30 MHz 2585 (517000) 2595 (519000) 2555 (511000) NR Band n38: 40 MHz 2590 (518000) 2595 (519000) 2550 (510000) NR Band n48: 10 MHz 3555 (637000) N/A 3601.68 (640112) 3648.33 (645222) 3694.98 (646332) NR Band n48: 20 MHz 3560.01 (637334) 3603.33 (640222) N/A 3645.68 (643112) 3690 (645000) NR Band n48: 30 MHz 3565.02 (637668) 3605.01 (640334) N/A 3645 (643000) 3684.99 (645668) NR Band n48: 40 MHz 3570 (638000) N/A 3624.99 (641666) N/A 3679.98 (645332) NR Band n77 DoD: 10 MHz 3485.01 (633334) 3500.01 (633334) 3541.99 (638332) NR Band n77 DoD: 15 MHz 3457.5 (630500) 3500.01 (633334) 3542.49 (638166) NR Band n77 DoD: 20 MHz 3460.02 (630668) 3500.01 (633334) 3540 (636000) NR Band n77 DoD: 25 MHz 3485 (631000) 3500.01 (633334) 3537.48 (635832) NR Band n77 DoD: 30 MHz 3470.01 (631334) N/A 3534.99 (635666) NR Band n77 DoD: 40 MHz 3475.02 (631668) N/A 3475.02 (631666) NR Band n77 DoD: 50 MHz N/A 3500.01(633334) N/A NR Band n77 DoD: 60 MHz N/A 3500.01(633334) N/A NR Band n77 DoD: 70 MHz N/A 3500.01(633334) N/A NR Band n77 DoD: 80 MHz N/A 3500.01(633334) N/A NR Band n77 DoD: 90 MHz N/A 3500.01(633334) N/A NR Band n77 DoD: 100 MHz N/A 3500.01(633334) N/A NR Band n77: 10 MHz 3705 (647000) 3759 (650600) 3813 (654200) 3867 (657800) 3921 (661400) 3975 (665000) NR Band n77: 15 MHz 3707.52 (647168) 3760.5 (650700) 3813.51 (654234) 3866.49 (657766) 3919.5 (661500) 3972.48 (664832) NR Band n77: 20 MHz 3710.01 (647334) 3762 (650800) 3813.99 (654266) 3866.01 (657734) 3918.81(200) 3969.99 (664666) NR Band n77: 30 MHz 3715.02 (647668) 3765 (651000) 3815.01 (654334) 3864.99 (657666) 3915 (661000) 3964.98 (664332) NR Band n77: 40 MHz 3720 (648000) 3768 (651200) 3816 (654400) 3864 (657600) 3912 (660800) 3960 (664000) NR Band n77: 50 MHz 3725.01 (648334) 3782.49 (652166) 3840 (656000) 3897.51 (659834) 3954.99 (663666) NR Band n77: 60 MHz 3730.02 (648668) 3803.34 (653556) N/A N/A 3876.66 (659444) 3940.98 (663332) NR Band n77: 70 MHz 3735 (649000) 3804.99 (653666) N/A N/A 3875.01 (659334) 3945 (663000) NR Band n77: 80 MHz 3740.01 (649334) N/A 3840 (656000) N/A 3930.99 (662666) NR Band n77: 90 MHz 3745.02 (649668) N/A 3840 (656000) N/A 3934.98 (662332) NR Band n77: 100 MHz 3750 (650000) N/A N/A N/A N/A 3930 (662000) SCS for NR Band n71/n12/n5/n66/n25/n2/n30/n7 15 MHz SCS for NR Band n41/n38/n77 30 MHz Modulations Supported in UL DFT-s-OFDM: m2 BPSK, QPSK, 16QAM, 64QAM, 256QAM CP-OFDM: QPSK, 16QAM, 64QAM, 256QAM AMPR (Additional MPR) allocated for SAR Testing? YES LTE Anchor Bands for NR Band n71 LTE Band 69/2/48 LTE Anchor Bands for NR Band n12 LTE Band 69/2 LTE Anchor Bands for NR Band n5 (Cell) LTE Band 2/66/30/48 LTE Anchor Bands for NR Band n66 (AWS) LTE Band 12/13/14/5/2/30/48 LTE Anchor Bands for NR Band n25 (PCS) LTE Band 12/66 LTE Anchor Bands for NR Band n2 (PCS) LTE Band 12/13/14/5/66/48/30 LTE Anchor Bands for NR Band n30 LTE Band 12/14/5/66/2 LTE Anchor Bands for NR Band n7 N/A LTE Anchor Bands for NR Band n41 LTE Band 69/2/52 LTE Anchor Bands for NR Band n38 N/A LTE Anchor Bands for NR Band n48 LTE Band 69/2 LTE Anchor Bands for NR Band n77 LTE Band 12/13/14/5/66/2/30

FCC ID: A3LSMS908U	 <b>PCTEST</b> Proud to be part of element	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2112090152-01.A3L	<b>Test Dates:</b> 10/31/21 - 11/15/21	<b>DUT Type:</b> Portable Handset		Page 13 of 35

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

### 3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density ( $\rho$ ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

**Equation 3-1**  
**SAR Mathematical Equation**

$$SAR = \frac{d}{dt} \left( \frac{dU}{dm} \right) = \frac{d}{dt} \left( \frac{dU}{\rho dv} \right)$$




SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- $\sigma$  = conductivity of the tissue-simulating material (S/m)
- $\rho$  = mass density of the tissue-simulating material (kg/m<sup>3</sup>)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]


FCC ID: A3LSMS908U	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2112090152-01.A3L	<b>Test Dates:</b> 10/31/21 - 11/15/21	<b>DUT Type:</b> Portable Handset	Page 14 of 35	

# 4 DOSIMETRIC ASSESSMENT

## 4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASy manual online for more details):
  - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
  - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
  - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.





**Figure 4-1**  
Sample SAR Area Scan

**Table 4-1**  
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04\*

Frequency	Maximum Area Scan Resolution (mm) ( $\Delta x_{\text{area}}, \Delta y_{\text{area}}$ )	Maximum Zoom Scan Resolution (mm) ( $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$ )	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x, y, z)
			Uniform Grid	Graded Grid		
			$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	$\Delta z_{\text{zoom}}(n>1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 22

\*Also compliant to IEEE 1528-2013 Table 6


FCC ID: A3LSMS908U		SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1M2112090152-01.A3L	Test Dates: 10/31/21 - 11/15/21	DUT Type: Portable Handset		Page 15 of 35	

# 5

## DEFINITION OF REFERENCE POINTS

### 5.1 EAR REFERENCE POINT

Figure 5-2 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (see Figure 5-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




**Figure 5-1**  
Close-Up Side view of ERP

### 5.2 HANDSET REFERENCE POINTS




Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 5-3). The acoustic output was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.

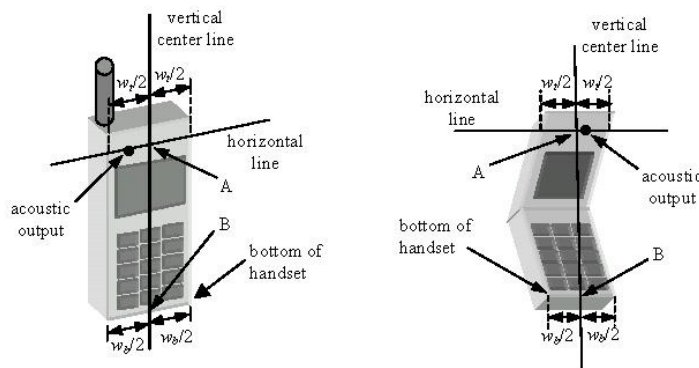

**Figure 5-2**  
Front, back and side view of SAM Twin Phantom



**Figure 5-3**  
Handset Vertical Center & Horizontal Line Reference Points

FCC ID: A3LSMS908U	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2112090152-01.A3L	Test Dates: 10/31/21 - 11/15/21	DUT Type: Portable Handset		Page 16 of 35



## 6 TEST CONFIGURATION POSITIONS

### 6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ .

### 6.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

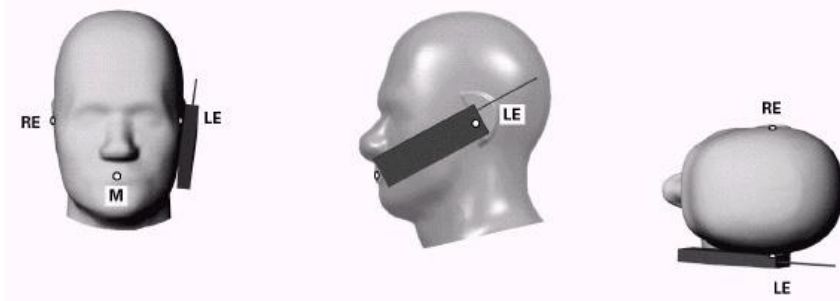





Figure 6-1 Front, Side and Top View of Cheek Position


2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 6-2).

### 6.3 Positioning for Ear / 15° Tilt


With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6-2).

FCC ID: A3LSMS908U	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2112090152-01.A3L	Test Dates: 10/31/21 - 11/15/21	DUT Type: Portable Handset		Page 17 of 35

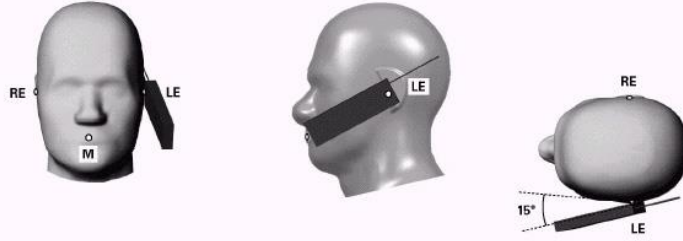

**Figure 6-2 Front, Side and Top View of Ear/15° Tilt Position**



**Figure 6-3 Side view w/ relevant markings**


### 6.4 SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones. Per IEEE 1528-2013, a rotated SAM phantom is necessary to allow probe access to such regions. Both SAM heads of the TwinSAM-Chin20 are rotated 20 degrees around the NF line. Each head can be removed from the table for emptying and cleaning.




Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04v01r03. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR location identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

### 6.5 Body-Worn Accessory Configurations

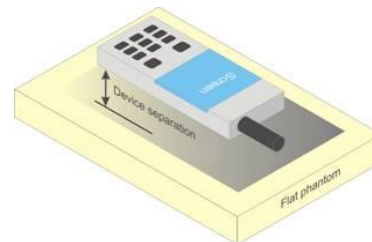Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6-4). Per FCC KDB Publication 648474 D04v01r03, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.



**Figure 6-4 Sample Body-Worn Diagram**

FCC ID: A3LSMS908U	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2112090152-01.A3L	Test Dates: 10/31/21 - 11/15/21	DUT Type: Portable Handset		Page 18 of 35

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person’s face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

## 6.6 Extremity Exposure Configurations




Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user’s body, SAR compliance for the body is also required. The 1g body and 10g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v06, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.

## 6.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets (L x W ≥ 9 cm x 5 cm) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 procedures. The “Portable Hotspot” feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

FCC ID: A3LSMS908U	 <small>Proud to be part of</small> 	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2112090152-01.A3L	Test Dates: 10/31/21 - 11/15/21	DUT Type: Portable Handset	Page 19 of 35	

## 6.8 Phablet Configurations




For smart phones with a display diagonal dimension > 150 mm or an overall diagonal dimension > 160 mm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the phablets procedures outlined in KDB Publication 648474 D04v01r03 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna  $\leq 25$  mm from that surface or edge, in direct contact with the phantom, for 10g SAR. The UMPC mini-tablet 1g SAR at 5 mm is not required. When hotspot mode applies, 10g SAR is required only for the surfaces and edges with hotspot mode 1g SAR > 1.2 W/kg.

## 6.9 Proximity Sensor Considerations

This device uses a power reduction mechanism to reduce output powers in certain use conditions when the device is used close the user's body.

When the device's antenna is within a certain distance of the user, the sensor activates and reduces the maximum allowed output power. However, the sensor is not active when the device is moved beyond the sensor triggering distance and the maximum output power is no longer limited. Therefore, additional evaluation is needed in the vicinity of the triggering distance to ensure SAR is compliant when the device is allowed to operate at a non-reduced output power level. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device at these additional test positions. Sensor triggering distance summary data can be found in the original filing.

The sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the sensor entirely covers the antennas.

FCC ID: A3LSMS908U	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2112090152-01.A3L	<b>Test Dates:</b> 10/31/21 - 11/15/21	<b>DUT Type:</b> Portable Handset	Page 20 of 35	

# 7 RF EXPOSURE LIMITS

## 7.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.




## 7.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 7-1  
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6**

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
<b>Peak Spatial Average SAR</b> Head	1.6	8.0
<b>Whole Body SAR</b>	0.08	0.4
<b>Peak Spatial Average SAR</b> Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.




FCC ID: A3LSMS908U	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2112090152-01.A3L	<b>Test Dates:</b> 10/31/21 - 11/15/21	<b>DUT Type:</b> Portable Handset	Page 21 of 35	

## 8 FCC MEASUREMENT PROCEDURES

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

### 8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

FCC ID: A3LSMS908U	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2112090152-01.A3L	Test Dates: 10/31/21 - 11/15/21	DUT Type: Portable Handset		Page 22 of 35

All conducted power measurements for 2G/3G/4G/5G Sub6 WWAN technologies and bands in this section were performed by setting *Reserve\_power\_margin* (Qualcomm® Smart Transmit EFS entry) to 0dB, so that the EUT transmits continuously at minimum ( $P_{limit}$ , maximum tune up output power  $P_{max}$ ).

## 9.1 NR Conducted Powers


Per October 2020 TCB Workshop Guidance, NR FR1 SAR evaluations are being generally based on adapting the existing LTE SAR procedures (FCC KDB Publication 941225 D05v02r05). Therefore, NR SAR for the lower bandwidths was not required for testing based on the measured output power and the reported NR SAR for the highest bandwidth. Lower bandwidth conducted powers for NR Band n48 can be found in Appendix H.

Note: Some bands do not support non-overlapping channels. Per FCC Guidance, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.




### 9.1.1 NR Band n48 Antenna F

**Table 9-1**  
NR Band n48 Antenna F Measured  $P_{Limit}$  for all DSI - 40 MHz Bandwidth

NR Band n48 40 MHz Bandwidth							
Modulation	RB Size	RB Offset	Channel			MPR Allowed per 3GPP [dB]	MPR [dB]
			638000 (3570 MHz)	641666 (3624.99 MHz)	645332 (3679.98 MHz)		
			Conducted Power [dBm]				
DFT-s-OFDM $\pi/2$ BPSK	1	1	16.62	16.79	16.74	0	0.0
	1	53	17.06	16.66	16.40		0.0
	1	104	17.10	16.69	16.81		0.0
	50	0	16.78	16.75	16.56	0-0.5	0.0
	50	28	16.75	16.60	16.44	0	0.0
	50	56	16.84	16.56	16.65	0-0.5	0.0
	100	0	16.85	16.58	16.49		0.0
DFT-s-OFDM QPSK	1	1	16.63	16.80	16.76	0	0.0
	1	53	16.89	16.57	16.47		0.0
	1	104	<b>17.04</b>	16.64	16.85		0.0
	50	0	16.68	16.79	16.69	0-1	0.0
	50	28	16.75	16.58	16.56	0	0.0
	50	56	<b>16.98</b>	16.57	16.72	0-1	0.0
	100	0	<b>16.97</b>	16.62	16.50		0.0
DFT-s-OFDM 16QAM	1	1	16.55	16.75	17.05	0-1	0.0
CP-OFDM QPSK	1	1	16.51	16.70	16.83	0-1.5	0.0



**Figure 9-1**  
Power Measurement Setup – NR TDD

FCC ID: A3LSMS908U	 PCTEST Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2112090152-01.A3L	Test Dates: 10/31/21 - 11/15/21	DUT Type: Portable Handset	Page 23 of 35	




# 10 SYSTEM VERIFICATION

## 10.1 Tissue Verification

**Table 10-1  
Measured Tissue Properties**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon$	TARGET Conductivity, $\sigma$ (S/m)	TARGET Dielectric Constant, $\epsilon$	% dev $\sigma$	% dev $\epsilon$
11/15/2021	3600 Head	18.5	3300	2.662	39.410	2.708	38.157	-1.70%	3.28%
			3350	2.712	39.310	2.759	38.100	-1.70%	3.18%
			3450	2.815	39.132	2.861	37.986	-1.61%	3.02%
			3500	2.865	39.059	2.913	37.929	-1.65%	2.98%
			3550	2.916	38.982	2.964	37.871	-1.62%	2.93%
			3560	2.927	38.967	2.974	37.860	-1.58%	2.92%
			3600	2.969	38.893	3.015	37.814	-1.53%	2.85%
			3650	3.018	38.807	3.066	37.757	-1.57%	2.78%
			3690	3.059	38.731	3.107	37.711	-1.54%	2.70%
10/31/2021	3600 Body	19.9	3300	3.030	49.776	3.080	51.593	-1.62%	-3.52%
			3350	3.089	49.680	3.139	51.525	-1.59%	-3.58%
			3450	3.207	49.508	3.256	51.389	-1.50%	-3.66%
			3500	3.260	49.444	3.314	51.321	-1.63%	-3.66%
			3550	3.320	49.362	3.372	51.254	-1.54%	-3.69%
			3560	3.332	49.347	3.384	51.240	-1.54%	-3.69%
			3600	3.379	49.276	3.431	51.186	-1.52%	-3.73%
			3650	3.437	49.181	3.489	51.118	-1.49%	-3.79%
			3690	3.484	49.110	3.536	51.063	-1.47%	-3.82%
11/03/2021	3600 Body	20.0	3300	2.984	49.461	3.080	51.593	-3.12%	-4.13%
			3350	3.042	49.356	3.139	51.525	-3.09%	-4.21%
			3450	3.157	49.157	3.256	51.389	-3.04%	-4.34%
			3500	3.212	49.074	3.314	51.321	-3.08%	-4.38%
			3550	3.271	48.993	3.372	51.254	-3.00%	-4.41%
			3560	3.283	48.975	3.384	51.240	-2.98%	-4.42%
			3600	3.330	48.904	3.431	51.186	-2.94%	-4.46%
			3650	3.389	48.825	3.489	51.118	-2.87%	-4.49%
			3690	3.435	48.748	3.536	51.063	-2.86%	-4.53%
			3700	3.446	48.737	3.548	51.050	-2.87%	-4.53%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

FCC ID: A3LSMS908U	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2112090152-01.A3L	Test Dates: 10/31/21 - 11/15/21	DUT Type: Portable Handset		Page 24 of 35



## 10.2 Test System Verification


Prior to SAR assessment, the system is verified to  $\pm 10\%$  of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix G.

**Table 10-2  
System Verification Results – 1g**

System Verification TARGET & MEASURED												
SAR System	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp. (C)	Liquid Temp. (C)	Input Power (W)	Source SN	Probe SN	Measured SAR1g (W/kg)	1W Target SAR1g (W/kg)	1W Normalized SAR 1g (W/kg)	Deviation1g (%)
L	3500	HEAD	11/15/2021	21.0	19.4	0.10	1097	7670	6.470	66.40	64.700	-2.56%
L	3700	HEAD	11/15/2021	21.0	19.4	0.10	1067	7670	7.040	67.20	70.400	4.76%
I	3500	BODY	10/31/2021	20.1	19.6	0.10	1059	7661	6.610	63.00	66.100	4.92%
I	3700	BODY	10/31/2021	20.1	19.6	0.10	1018	7661	6.600	63.50	66.000	3.94%

**Table 10-3  
System Verification Results – 10g**

System Verification TARGET & MEASURED												
SAR System	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp. (C)	Liquid Temp. (C)	Input Power (W)	Source SN	Probe SN	Measured SAR10g (W/kg)	1W Target SAR10g (W/kg)	1W Normalized SAR10g (W/kg)	Deviation10g (%)
I	3500	BODY	11/03/2021	20.9	20.0	0.10	1059	7661	2.530	23.30	25.300	8.58%
I	3700	BODY	11/03/2021	20.9	20.0	0.10	1018	7661	2.420	22.50	24.200	7.56%

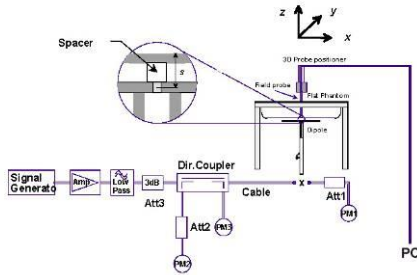

**Figure 10-1  
System Verification Setup Diagram**



**Figure 10-2  
System Verification Setup Photo**

FCC ID: A3LSMS908U	PCTEST Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2112090152-01.A3L	Test Dates: 10/31/21 - 11/15/21	DUT Type: Portable Handset		Page 25 of 35

# 11 SAR DATA SUMMARY

## 11.1 Standalone Head SAR Data



**Table 11-1  
NR Band n48 Head SAR**

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Antenna Config	Power Drift [dB]	MPR [dB]	Side	Test Position	Waveform	Modulation	RB Size	RB Offset	Serial Number	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Reported SAR (1g) (W/kg)	Plot #	
Mhz	Ch.																				
3570.00	638000	Low	NR Band n48	40	18.0	17.04	F	0.03	0	Right	Cheek	DFT-S-OFDM	QPSK	1	104	0861M	1:1	0.624	1.247	0.778	
3624.99	641666	Mid	NR Band n48	40	18.0	16.80	F	0.09	0	Right	Cheek	DFT-S-OFDM	QPSK	1	1	0861M	1:1	0.658	1.318	0.867	
3679.98	645332	High	NR Band n48	40	18.0	16.85	F	0.09	0	Right	Cheek	DFT-S-OFDM	QPSK	1	104	0861M	1:1	0.674	1.303	0.878	A1
3570.00	638000	Low	NR Band n48	40	18.0	16.98	F	-0.03	0	Right	Cheek	DFT-S-OFDM	QPSK	50	56	0861M	1:1	0.595	1.265	0.753	
3624.99	641666	Mid	NR Band n48	40	18.0	16.79	F	0.01	0	Right	Cheek	DFT-S-OFDM	QPSK	50	0	0861M	1:1	0.663	1.321	0.876	
3679.98	645332	High	NR Band n48	40	18.0	16.72	F	-0.04	0	Right	Cheek	DFT-S-OFDM	QPSK	50	56	0861M	1:1	0.627	1.343	0.842	
3570.00	638000	Low	NR Band n48	40	18.0	16.97	F	-0.02	0	Right	Cheek	DFT-S-OFDM	QPSK	100	0	0861M	1:1	0.579	1.268	0.734	
3679.98	645332	High	NR Band n48	40	18.0	16.83	F	-0.02	0	Right	Cheek	CP-OFDM	QPSK	1	1	0861M	1:1	0.626	1.309	0.819	
3570.00	638000	Low	NR Band n48	40	18.0	17.04	F	0.05	0	Right	Tilt	DFT-S-OFDM	QPSK	1	104	0861M	1:1	0.370	1.247	0.461	
3570.00	638000	Low	NR Band n48	40	18.0	16.98	F	-0.03	0	Right	Tilt	DFT-S-OFDM	QPSK	50	56	0861M	1:1	0.361	1.265	0.457	
3570.00	638000	Low	NR Band n48	40	18.0	17.04	F	0.08	0	Left	Cheek	DFT-S-OFDM	QPSK	1	104	0861M	1:1	0.178	1.247	0.222	
3570.00	638000	Low	NR Band n48	40	18.0	16.98	F	-0.06	0	Left	Cheek	DFT-S-OFDM	QPSK	50	56	0861M	1:1	0.172	1.265	0.218	
3570.00	638000	Low	NR Band n48	40	18.0	17.04	F	0.01	0	Left	Tilt	DFT-S-OFDM	QPSK	1	104	0861M	1:1	0.161	1.247	0.201	
3570.00	638000	Low	NR Band n48	40	18.0	16.98	F	-0.03	0	Left	Tilt	DFT-S-OFDM	QPSK	50	56	0861M	1:1	0.154	1.265	0.195	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Head 1.6 W/kg (mW/g) averaged over 1 gram									

## 11.2 Standalone Body-Worn SAR Data

**Table 11-2  
NR Band n48 Body-Worn SAR**

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Antenna Config	Power Drift [dB]	MPR [dB]	Serial Number	Waveform	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Reported SAR (1g) (W/kg)	Plot #	
Mhz	Ch.																				
3570.00	638000	Low	NR Band n48	40	18.0	17.04	F	0.18	0	0557M	DFT-S-OFDM	QPSK	1	104	15 mm	back	1:1	0.112	1.247	0.140	A2
3570.00	638000	Low	NR Band n48	40	18.0	16.98	F	-0.15	0	0557M	DFT-S-OFDM	QPSK	50	56	15 mm	back	1:1	0.104	1.265	0.132	
3679.98	645332	High	NR Band n48	40	18.0	16.83	F	0.13	0	0557M	CP-OFDM	QPSK	1	1	15 mm	back	1:1	0.089	1.309	0.117	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: A3LSMS908U	 PCTEST Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2112090152-01.A3L	Test Dates: 10/31/21 - 11/15/21	DUT Type: Portable Handset		Page 26 of 35

### 11.3 Standalone Hotspot SAR Data

**Table 11-3  
NR Band n48 Hotspot SAR**



MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Antenna Config	Power Drift [dB]	MPR [dB]	Serial Number	Waveform	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Reported SAR (1g) (W/kg)	Plot #	
MHz	Ch.																				
3570.00	638000	Low	NR Band n48	40	18.0	17.04	F	-0.03	0	0557M	DFT-S-OFDM	QPSK	1	104	10 mm	back	1:1	0.244	1.247	0.304	
3570.00	638000	Low	NR Band n48	40	18.0	16.98	F	-0.01	0	0557M	DFT-S-OFDM	QPSK	50	56	10 mm	back	1:1	0.222	1.265	0.281	
3570.00	638000	Low	NR Band n48	40	18.0	17.04	F	-0.02	0	0557M	DFT-S-OFDM	QPSK	1	104	10 mm	front	1:1	0.195	1.247	0.243	
3570.00	638000	Low	NR Band n48	40	18.0	16.98	F	-0.12	0	0557M	DFT-S-OFDM	QPSK	50	56	10 mm	front	1:1	0.194	1.265	0.245	
3570.00	638000	Low	NR Band n48	40	18.0	17.04	F	-0.03	0	0557M	DFT-S-OFDM	QPSK	1	104	10 mm	top	1:1	0.166	1.247	0.207	
3570.00	638000	Low	NR Band n48	40	18.0	16.98	F	0.06	0	0557M	DFT-S-OFDM	QPSK	50	56	10 mm	top	1:1	0.157	1.265	0.199	
3570.00	638000	Low	NR Band n48	40	18.0	17.04	F	0.02	0	0557M	DFT-S-OFDM	QPSK	1	104	10 mm	left	1:1	0.515	1.247	0.642	
3624.99	641666	Mid	NR Band n48	40	18.0	16.80	F	-0.09	0	0557M	DFT-S-OFDM	QPSK	1	1	10 mm	left	1:1	0.447	1.318	0.589	
3679.98	645332	High	NR Band n48	40	18.0	16.85	F	-0.05	0	0557M	DFT-S-OFDM	QPSK	1	104	10 mm	left	1:1	0.365	1.303	0.476	
3570.00	638000	Low	NR Band n48	40	18.0	16.98	F	0.00	0	0557M	DFT-S-OFDM	QPSK	50	56	10 mm	left	1:1	0.460	1.265	0.582	
3624.99	641666	Mid	NR Band n48	40	18.0	16.79	F	-0.03	0	0557M	DFT-S-OFDM	QPSK	50	0	10 mm	left	1:1	0.436	1.321	0.576	
3679.98	645332	High	NR Band n48	40	18.0	16.72	F	0.03	0	0557M	DFT-S-OFDM	QPSK	50	56	10 mm	left	1:1	0.359	1.343	0.482	
3570.00	638000	Low	NR Band n48	40	18.0	16.97	F	-0.01	0	0557M	DFT-S-OFDM	QPSK	100	0	10 mm	left	1:1	0.526	1.268	0.667	A3
3679.98	645332	High	NR Band n48	40	18.0	16.83	F	-0.02	0	0557M	CP-OFDM	QPSK	1	1	10 mm	left	1:1	0.403	1.309	0.528	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram									

### 11.4 Standalone Phablet SAR Data

**Table 11-4  
NR Band n48 Phablet SAR**

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Antenna Config	Power Drift [dB]	MPR [dB]	Serial Number	Waveform	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g) (W/kg)	Scaling Factor	Reported SAR (10g) (W/kg)	Plot #	
MHz	Ch.																				
3570.00	638000	Low	NR Band n48	40	18.0	17.04	F	-0.02	0	0557M	DFT-S-OFDM	QPSK	1	104	0 mm	back	1:1	0.753	1.247	0.939	
3570.00	638000	Low	NR Band n48	40	18.0	16.98	F	-0.01	0	0557M	DFT-S-OFDM	QPSK	50	56	0 mm	back	1:1	0.726	1.265	0.918	
3570.00	638000	Low	NR Band n48	40	18.0	17.04	F	0.02	0	0557M	DFT-S-OFDM	QPSK	1	104	0 mm	left	1:1	2.380	1.247	2.968	
3624.99	641666	Mid	NR Band n48	40	18.0	16.80	F	-0.06	0	0557M	DFT-S-OFDM	QPSK	1	1	0 mm	left	1:1	2.160	1.318	2.847	
3679.98	645332	High	NR Band n48	40	18.0	16.85	F	-0.10	0	0557M	DFT-S-OFDM	QPSK	1	104	0 mm	left	1:1	1.830	1.303	2.384	
3570.00	638000	Low	NR Band n48	40	18.0	16.98	F	-0.02	0	0557M	DFT-S-OFDM	QPSK	50	56	0 mm	left	1:1	2.320	1.265	2.935	
3624.99	641666	Mid	NR Band n48	40	18.0	16.79	F	0.02	0	0557M	DFT-S-OFDM	QPSK	50	0	0 mm	left	1:1	2.030	1.321	2.682	
3679.98	645332	High	NR Band n48	40	18.0	16.72	F	-0.04	0	0557M	DFT-S-OFDM	QPSK	50	56	0 mm	left	1:1	1.790	1.343	2.404	
3570.00	638000	Low	NR Band n48	40	18.0	16.97	F	0.00	0	0557M	DFT-S-OFDM	QPSK	100	0	0 mm	left	1:1	2.480	1.268	3.145	A4
3679.98	645332	High	NR Band n48	40	18.0	16.83	F	-0.06	0	0557M	CP-OFDM	QPSK	1	1	0 mm	left	1:1	1.920	1.309	2.513	
3570.00	638000	Low	NR Band n48	40	18.0	16.97	F	-0.04	0	0557M	DFT-S-OFDM	QPSK	100	0	0 mm	left	1:1	2.440	1.268	3.094	
3624.99	641666	Mid	NR Band n48	40	18.0	16.80	F	-0.04	0	0557M	DFT-S-OFDM	QPSK	1	1	0 mm	left	1:1	2.160	1.318	2.847	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Extremity 4.0 W/kg (mW/g) averaged over 10 grams									

Note: Blue entry represents variability measurement.

FCC ID: A3LSMS908U	 PCTEST Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2112090152-01.A3L	Test Dates: 10/31/21 - 11/15/21	DUT Type: Portable Handset		Page 27 of 35




## 11.5 SAR Test Notes

### General Notes:




1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 15 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
7. Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was  $\leq 1.2$  W/kg, no additional body-worn SAR evaluations using a headset cable were required.
8. Per FCC KDB 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than or equal to 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 12 for variability analysis.
9. During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated (See Section 6.7 for more details).
10. Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is  $> 160$  mm and  $< 200$  mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR  $> 1.2$  W/kg.
11. Additional SAR tests for phablet SAR were evaluated per KDB 616217 Section 6 (See Section 6.9 for more information).
12. Unless otherwise noted, when 10g SAR measurement is considered, a factor of 2.5 is applied to the 1g thresholds for the equivalent test cases.
13. This device uses Qualcomm Smart Transmit for 2G/3G/4G/5G operations to control and manage transmitting power in real time to ensure RF Exposure compliance. Per FCC Guidance, compliance for was assessed at the minimum of the time averaged power and the maximum output power for each band/mode/exposure condition (DSI).

### NR Notes:

1. NR implementation supports SA and NSA mode. In EN-DC mode, NR operates with the LTE Bands shown in the NR FR1 checklist acting as anchor bands. Per FCC guidance, SAR tests for NR Bands and LTE Anchors Bands were performed separately due to limitations in SAR probe calibration factors.
2. Due to test setup limitations, SAR testing for NR TDD was performed using test mode software to establish the connection.
3. Simultaneous transmission analysis for EN-DC operations is addressed in the Part 2 Test Report (Serial Number can be found in the original filing).
4. This device additionally supports some EN-DC conditions where additional LTE carriers are added on the downlink only.
5. Per FCC Guidance, NR modulations and RB Sizes/Offsets were selected for testing such that configurations with the highest output power were evaluated for SAR tests.
6. Per FCC KDB Publication 447498 D01v06, when the reported NR Band n77 C-Band SAR measured at the highest output power channel in a given a test configuration was  $> 0.4$  W/kg for 1g evaluations and  $> 1$  W/kg for 10g evaluation, testing at the other channels was required for such test configurations.

FCC ID: A3LSMS908U	 PCTEST Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2112090152-01.A3L	Test Dates: 10/31/21 - 11/15/21	DUT Type: Portable Handset	Page 28 of 35	

7. Per FCC KDB Publication 447498 D01v06, when the reported NR Band n41 SAR measured at the highest output power channel in a given a test configuration was > 0.6 W/kg for 1g evaluations and > 1 W/kg for 10g evaluation, testing at the other channels was required for such test configurations.
8. SRS was tested with CW signal per Qualcomm guidance in 80-w2112-4.

FCC ID: A3LSMS908U	 <b>PCTEST</b> <small>Proud to be part of </small>	<b>SAR EVALUATION REPORT</b>	 <b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2112090152-01.A3L	<b>Test Dates:</b> 10/31/21 - 11/15/21	<b>DUT Type:</b> Portable Handset	Page 29 of 35  REV 21.4 M 09/11/2019

## 12 SAR MEASUREMENT VARIABILITY

### 12.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:




- 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg (~10% from the 1g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .
- 4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg
- 5) When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

**Table 12-1  
Phablet SAR Measurement Variability Results**

PHABLET VARIABILITY RESULTS														
Band	FREQUENCY		Mode	Service	Side	Spacing	Antenna Config	Measured SAR (10g)	1st Repeated SAR (10g)	Ratio	2nd Repeated SAR (10g)	Ratio	3rd Repeated SAR (10g)	Ratio
	MHz	Ch.						(W/kg)	(W/kg)		(W/kg)		(W/kg)	
3500	3570.00	638000	NR Band n48, 40 MHz Bandwidth	DFT-S-OFDM, QPSK, 100 RB, 0 RB Offset	left	0 mm	F	2.480	2.440	1.02	N/A	N/A	N/A	N/A
3700	3624.99	641666	NR Band n48, 40 MHz Bandwidth	DFT-S-OFDM, QPSK, 1 RB, 1 RB Offset	left	0 mm	F	2.160	2.160	1.00	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT) Spatial Peak Uncontrolled Exposure/General Population								Phablet 4.0 W/kg (mW/g) averaged over 10 grams						

### 12.2 Measurement Uncertainty

The measured SAR was  $< 1.5$  W/kg for 1g and  $< 3.75$  W/kg for 10g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.




FCC ID: A3LSMS908U	 PCTEST Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2112090152-01.A3L	Test Dates: 10/31/21 - 11/15/21	DUT Type: Portable Handset	Page 30 of 35	

# 13 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8594A	(9kHz-2.9GHz) Spectrum Analyzer	N/A	N/A	N/A	3051A00187
Agilent	85033E	3.5mm Standard Calibration Kit	7/7/2021	Annual	7/7/2022	MY53402352
Agilent	E4438C	ESG Vector Signal Generator	12/14/2020	Biennial	12/14/2022	MY42082385
Agilent	E4432B	ESG-D Series Signal Generator	2/24/2021	Annual	2/24/2022	US40053896
Agilent	N5182A	MXG Vector Signal Generator	6/15/2021	Annual	6/15/2022	MY47420800
Agilent	N5182A	MXG Vector Signal Generator	6/21/2021	Annual	6/21/2022	MY47420603
Agilent	8753ES	S-Parameter Vector Network Analyzer	2/2/2021	Annual	2/2/2022	US39170122
Agilent	E5515C	Wireless Communications Test Set	5/4/2021	Biennial	5/4/2023	GB41450275
Amplifier Research	15S1G6	Amplifier	9/15/2021	Annual	9/15/2022	433971
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433972
Anritsu	MN8110B	I/O Adaptor	CBT	N/A	CBT	6261747881
Anritsu	ML2495A	Power Meter	1/18/2021	Annual	1/18/2022	941001
Anritsu	ML2496A	Power Meter	2/19/2021	Annual	2/19/2022	1138001
Anritsu	MA2411B	Pulse Power Sensor	8/10/2021	Annual	8/10/2022	1207364
Anritsu	MA2411B	Pulse Power Sensor	12/18/2020	Annual	12/18/2021	1126066
Anritsu	MT8821C	Radio Communication Analyzer	4/16/2021	Annual	4/16/2022	6200901190
Anritsu	MT8820C	Radio Communication Analyzer	10/23/2021	Annual	10/23/2022	6201300731
Anritsu	MA24106A	USB Power Sensor	8/10/2021	Annual	8/10/2022	1231538
Anritsu	MA24106A	USB Power Sensor	8/10/2021	Annual	8/10/2022	1231535
COMTECH	AR85729-5/5759B	Solid State Amplifier	CBT	N/A	CBT	M3W1A00-1002
Control Company	4353	Long Stem Thermometer	10/28/2020	Biennial	10/28/2022	200670623
Control Company	4353	Long Stem Thermometer	10/28/2020	Biennial	10/28/2022	200670633
Control Company	4040	Therm./ Clock/ Humidity Monitor	2/23/2021	Annual	2/23/2022	160574418
Intelligent Weighing	PD-3000	Electronic Balance	CBT	N/A	CBT	11081534
Insize	1108-150	Digital Caliper	1/17/2020	Biennial	1/17/2022	409193536
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	N6705B	DC Power Analyzer	5/5/2021	Triennial	5/5/2024	MY53004059
Keysight Technologies	N9020A	MXA Signal Analyzer	2/24/2021	Annual	2/24/2022	MY48010233
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	TVA-11-422	RF Power Amp	CBT	N/A	CBT	QA1303002
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	BW-S3W2	Attenuator (3dB)	CBT	N/A	CBT	120
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	NC-100	Torque Wrench	44166	Annual	44531	N/A
Pasternack	NC-100	Torque Wrench	8/4/2020	Biennial	8/4/2022	N/A
Pasternack	NC-100	Torque Wrench (8in-lbs)	8/5/2020	Biennial	8/5/2022	47639-47
Rohde & Schwarz	CMW500	Radio Communication Tester	4/13/2021	Annual	4/13/2022	167284
Rohde & Schwarz	CMW500	Radio Communication Tester	4/27/2021	Annual	4/27/2022	167285
Rohde & Schwarz	CMW500	Radio Communication Tester	9/24/2021	Annual	9/24/2022	167286
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	9/29/2021	Annual	9/29/2022	151849
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	9/29/2021	Annual	9/29/2022	145663
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/12/2021	Annual	5/12/2022	1070
SPEAG	MAIA	Modulation and Audio Interference Analyzer	N/A	N/A	N/A	1237
SPEAG	D3500V2	3500 MHz SAR Dipole	1/21/2020	Biennial	1/21/2022	1097
SPEAG	D3500V2	3500 MHz SAR Dipole	1/19/2021	Biennial	1/19/2023	1059
SPEAG	D3700V2	3700 MHz SAR Dipole	1/21/2020	Biennial	1/21/2022	1067
SPEAG	D3700V2	3700 MHz SAR Dipole	1/19/2021	Biennial	1/19/2023	1018
SPEAG	DAE4	Dasy Data Acquisition Electronics	8/16/2021	Annual	8/16/2022	1450
SPEAG	DAE4	Dasy Data Acquisition Electronics	8/3/2021	Annual	8/3/2022	1681
SPEAG	EX3DV4	SAR Probe	6/28/2021	Annual	6/28/2022	7661
SPEAG	EX3DV4	SAR Probe	8/5/2021	Annual	8/5/2022	7670

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.




Note: All equipment was used solely within its respective calibration period.

FCC ID: A3LSMS908U	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2112090152-01.A3L	Test Dates: 10/31/21 - 11/15/21	DUT Type: Portable Handset		Page 31 of 35

# 14 MEASUREMENT UNCERTAINTIES

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c <sub>i</sub> 1gm	c <sub>i</sub> 10 gms	1gm u <sub>i</sub> (± %)	10gms u <sub>i</sub> (± %)	v <sub>i</sub>
<b>Measurement System</b>									
Probe Calibration	E.2.1	7	N	1	1	1	7.0	7.0	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	E.2.3	2	R	1.732	1	1	1.2	1.2	∞
Linearity	E.2.4	0.3	N	1	1	1	0.3	0.3	∞
System Detection Limits	E.2.4	0.25	R	1.732	1	1	0.1	0.1	∞
Modulation Response	E.2.5	4.8	R	1.732	1	1	2.8	2.8	∞
Readout Electronics	E.2.6	0.3	N	1	1	1	0.3	0.3	∞
Response Time	E.2.7	0.8	R	1.732	1	1	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.732	1	1	1.5	1.5	∞
RF Ambient Conditions - Noise	E.6.1	3	R	1.732	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	3	R	1.732	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.8	R	1.732	1	1	0.5	0.5	∞
Probe Positioning w/ respect to Phantom	E.6.3	6.7	R	1.732	1	1	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	4	R	1.732	1	1	2.3	2.3	∞
<b>Test Sample Related</b>									
Test Sample Positioning	E.4.2	3.12	N	1	1	1	3.1	3.1	35
Device Holder Uncertainty	E.4.1	1.67	N	1	1	1	1.7	1.7	5
Output Power Variation - SAR drift measurement	E.2.9	5	R	1.732	1	1	2.9	2.9	∞
SAR Scaling	E.6.5	0	R	1.732	1	1	0.0	0.0	∞
<b>Phantom &amp; Tissue Parameters</b>									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	E.3.3	4.3	N	1	0.78	0.71	3.3	3.0	76
Liquid Permittivity - measurement uncertainty	E.3.3	4.2	N	1	0.23	0.26	1.0	1.1	75
Liquid Conductivity - Temperature Uncertainty	E.3.4	3.4	R	1.732	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	E.3.4	0.6	R	1.732	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)	RSS						12.2	12.0	191
Expanded Uncertainty (95% CONFIDENCE LEVEL)	k=2						24.4	24.0	

The above measurement uncertainties are according to IEEE Std. 1528-2013

FCC ID: A3LSMS908U	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2112090152-01.A3L	<b>Test Dates:</b> 10/31/21 - 11/15/21	<b>DUT Type:</b> Portable Handset	Page 32 of 35	






# 15 CONCLUSION

## 15.1 Measurement Conclusion




The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]




FCC ID: A3LSMS908U	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2112090152-01.A3L	Test Dates: 10/31/21 - 11/15/21	DUT Type: Portable Handset		Page 33 of 35

## 16 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID: A3LSMS908U	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2112090152-01.A3L	<b>Test Dates:</b> 10/31/21 - 11/15/21	<b>DUT Type:</b> Portable Handset	Page 34 of 35	

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

<b>FCC ID:</b> A3LSMS908U	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2112090152-01.A3L	<b>Test Dates:</b> 10/31/21 - 11/15/21	<b>DUT Type:</b> Portable Handset	Page 35 of 35	