

# FCC BT LE REPORT

## Certification

**Applicant Name:**  
SAMSUNG Electronics Co., Ltd.

**Address:**  
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**Date of Issue:**  
November 03, 2022

**Test Site/Location:**  
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA

**Report No.:** HCT-RF-2210-FC032-R1

|                   |                                      |
|-------------------|--------------------------------------|
| <b>FCC ID:</b>    | <b>A3LSMS911B</b>                    |
| <b>APPLICANT:</b> | <b>SAMSUNG Electronics Co., Ltd.</b> |

**Model:** SM-S911B/DS  
**Additional Model:** SM-S911B  
**EUT Type:** Mobile Phone  
**Average Output Power:** Ant.1: 14.80 dBm (30.20 mW)  
Ant.2: 14.82 dBm (30.34 mW)  
**Frequency Range:** 2 402 MHz ~ 2 480 MHz  
**Modulation type** GFSK  
**FCC Classification:** Digital Transmission System(DTS)  
**FCC Rule Part(s):** Part 15.247

**Engineering Statement:**

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

Report No.: HCT-RF-2210-FC032-R1

---

REVIEWED BY



---

Report prepared by : Jin Gwan Lee  
Engineer of Telecommunication Testing Center

---

Report approved by : Jong Seok Lee  
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked \*.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

\* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

# Version

| TEST REPORT NO.      | DATE             | DESCRIPTION  |
|----------------------|------------------|--|
| HCT-RF-2210-FC032    | October 21, 2022 | - First Approval Report  |
| HCT-RF-2210-FC032-R1 | November 3, 2022 | - Retest (Section 9.1 ~ 9.5)<br>- Section 9.6 & 9.7, Revised Duty Cycle Factor & Total Value, and Margin |

# Table of Contents

|  |     |
|--|-----|
| REVIEWED BY .....                                | 2   |
| 1. EUT DESCRIPTION .....                         | 5   |
| ANTENNA CONFIGURATIONS .....                     | 6   |
| 2. TEST METHODOLOGY .....                        | 8   |
| EUT CONFIGURATION .....                          | 8   |
| EUT EXERCISE .....                               | 8   |
| GENERAL TEST PROCEDURES .....                    | 8   |
| DESCRIPTION OF TEST MODES .....                  | 9   |
| 3. INSTRUMENT CALIBRATION.....                   | 9   |
| 4. FACILITIES AND ACCREDITATIONS .....           | 9   |
| FACILITIES .....                                 | 9   |
| EQUIPMENT .....                                  | 9   |
| 5. ANTENNA REQUIREMENTS .....                    | 10  |
| 6. MEASUREMENT UNCERTAINTY .....                 | 10  |
| 7. DESCRIPTION OF TESTS.....                     | 11  |
| 8. SUMMARY TEST OF RESULTS .....                 | 28  |
| 9. TEST RESULT .....                             | 29  |
| 9.1 DUTY CYCLE.....                              | 29  |
| 9.2 6 dB BANDWIDTH .....                         | 34  |
| 9.3 OUTPUT POWER .....                           | 52  |
| 9.4 POWER SPECTRAL DENSITY .....                 | 56  |
| 9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS..... | 62  |
| 9.6 RADIATED SPURIOUS EMISSIONS .....            | 80  |
| 9.7 RADIATED RESTRICTED BAND EDGES .....         | 91  |
| 9.8 POWERLINE CONDUCTED EMISSIONS .....          | 95  |
| 10. LIST OF TEST EQUIPMENT .....                 | 99  |
| 11. ANNEX A_ TEST SETUP PHOTO .....              | 101 |

**1. EUT DESCRIPTION**

|                                      |  |                                |  |
|--------------------------------------|--|--------------------------------|--|
| <b>Model</b>                         | SM-S911B/DS  |                                |  |
| <b>Additional Model</b>              | SM-S911B   |                                |  |
| <b>EUT Type</b>                      | Mobile Phone   |                                |  |
| <b>Power Supply</b>                  | DC 3.88 V  |                                |  |
| <b>Frequency Range</b>               | 2 402 MHz ~ 2 480 MHz  |                                |  |
| <b>Max. RF Output Power (Normal)</b> | Ant.1  | Peak<br>(For information only) | 1 M Bit/s: 15.378 dBm (34.50 mW)<br>2 M Bit/s: 15.143 dBm (32.68 mW)<br>125 k Bit/s : 6.728 dBm (4.71 mW)<br>500 k Bit/s : 6.744 dBm (4.72 mW) |
|                                      |  | Average                        | 1 M Bit/s: 14.62 dBm (28.98 mW)<br>2 M Bit/s: 14.80 dBm (30.20 mW)<br>125 k Bit/s : 6.57 dBm (4.54 mW)<br>500 k Bit/s : 6.67 dBm (4.64 mW)     |
|                                      | Ant.2  | Peak<br>(For information only) | 1 M Bit/s: 14.926 dBm (31.09 mW)<br>2 M Bit/s: 15.249 dBm (33.49 mW)<br>125 k Bit/s : 6.859 dBm (4.85 mW)<br>500 k Bit/s : 6.864 dBm (4.86 mW) |
|                                      |  | Average                        | 1 M Bit/s: 14.73 dBm (29.72 mW)<br>2 M Bit/s: 14.82 dBm (30.34 mW)<br>125 k Bit/s : 6.69 dBm (4.67 mW)<br>500 k Bit/s : 6.75 dBm (4.73 mW)     |
| <b>Modulation Type</b>               | GFSK   |                                |  |
| <b>Bluetooth Version</b>             | 5.3  |                                |  |
| <b>Number of Channels</b>            | 40 Channels  |                                |  |
| <b>Date(s) of Tests</b>              | September 06, 2022 ~ October 21, 2022<br>November 2, 2022 ~ November 3, 2022 |                                |  |
| <b>Serial number</b>                 | Radiated: R3CT90BE36R<br>Conducted : R3CT706PF2A                             |                                |  |

**ANTENNA CONFIGURATIONS**

1. The device employs MIMO technology. Below are the possible configurations

| Configurations | SISO         |              | Dual BT     |
|----------------|--------------|--------------|-------------|
|                | Ant1(core-0) | Ant2(Core-1) | Ant1 & Ant2 |
| Bluetooth      | O            | O            | X           |

**Note:**

- 1) O = Support, X = Not Support
- 2) SISO = Single Input Single Output
- 3) Dual BT = Single Output 1 & 2

2.This device supports simultaneous transmission operation, which allows for two channels to operate independent of one another in the 2.4 GHz and 5 GHz bands simultaneously on each antenna.

| RSDB Scenario  | 2.4 GHz<br>WiFi<br>Ant.1 | 2.4 GHz<br>WiFi<br>Ant.2 | 5 GHz<br>WiFi<br>Ant.1 | 5 GHz<br>WiFi<br>Ant.2 | 6 GHz<br>WiFi<br>Ant.1 | 6 GHz<br>WiFi<br>Ant.2 | Bluetooth<br>Ant.1 | Bluetooth<br>Ant.2 |
|--|--------------------------|--------------------------|------------------------|------------------------|------------------------|------------------------|--------------------|--------------------|
| 2.4 GHz WiFi MIMO +<br>6 GHz WiFi MIMO                       | on                       | on                       |                        |                        | on                     | on                     |                    |                    |
| 2.4 GHz WiFi MIMO +<br>5 GHz WiFi MIMO                       | on                       | on                       | on                     | on                     |                        |                        |                    |                    |
| Bluetooth ANT.1 +<br>2.4 GHz WiFi ANT.2 +<br>5 GHz WiFi MIMO |                          | on                       | on                     | on                     |                        |                        | on                 |                    |
| Bluetooth ANT.1 +<br>2.4 GHz WiFi ANT.2 +<br>6 GHz WiFi MIMO |                          | on                       |                        |                        | on                     | on                     | on                 |                    |

| Non-DBS                              | 2.4 GHz<br>WiFi<br>Ant.1 | 2.4 GHz<br>WiFi<br>Ant.2 | 5 GHz<br>WiFi<br>Ant.1 | 5 GHz<br>WiFi<br>Ant.2 | 6 GHz<br>WiFi<br>Ant.1 | 6 GHz<br>WiFi<br>Ant.2 | Bluetooth<br>Ant.1 | Bluetooth<br>Ant.2 |
|--------------------------------------|--------------------------|--------------------------|------------------------|------------------------|------------------------|------------------------|--------------------|--------------------|
| Bluetooth ANT.2 +<br>6 GHz WiFi MIMO |                          |                          |                        |                        | on                     | on                     |                    | on                 |
| Bluetooth ANT.2 +<br>5GHz WiFi MIMO  |                          |                          | on                     | on                     |                        |                        |                    | on                 |
| Bluetooth ANT.1 +<br>6 GHz WiFi MIMO |                          |                          |                        |                        | on                     | on                     | on                 |                    |
| Bluetooth ANT.1 +<br>5GHz WiFi MIMO  |                          |                          | on                     | on                     | -                      | -                      | on                 | -                  |

## **2. TEST METHODOLOGY**

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

### **EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### **EUT EXERCISE**

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

## **GENERAL TEST PROCEDURES**

### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)



## **DESCRIPTION OF TEST MODES**

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

## **3. INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## **4. FACILITIES AND ACCREDITATIONS**

### **FACILITIES**

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil,

Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

### **EQUIPMENT**

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

**5. ANTENNA REQUIREMENTS**

**According to FCC 47 CFR §15.203**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of §15.203

**6. MEASUREMENT UNCERTAINTY**

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Parameter                                | Expanded Uncertainty (dB)                   |
|--|---|
| Conducted Disturbance (150 kHz ~ 30 MHz) | 2.00 ( Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (9 kHz ~ 30 MHz)    | 4.40 ( Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (30 MHz ~ 1 GHz)    | 5.74 ( Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (1 GHz ~ 18 GHz)    | 5.51 ( Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (18 GHz ~ 40 GHz)   | 5.92 ( Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (Above 40 GHz)      | 5.48 ( Confidence level about 95 %, $k=2$ ) |

## 7. DESCRIPTION OF TESTS

### 7.1. Duty Cycle

#### Test Configuration

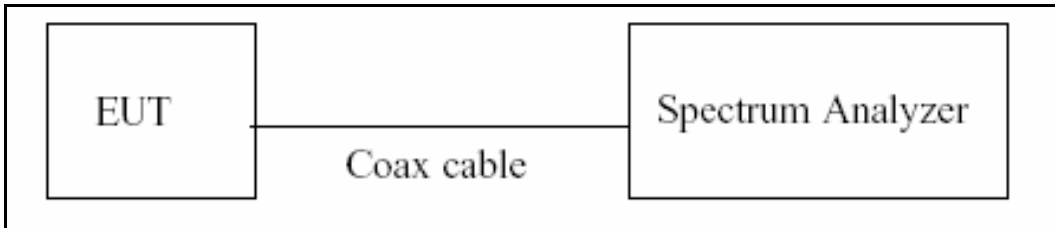

#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method, 6.0)b) in KDB 558074 v05r02.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if  $T \leq 6.25$  microseconds. ( $50/6.25 = 8$ )

The zero-span method was used because all measured T data are  $> 6.25$  microseconds and both RBW and VBW are  $> 50/T$ .


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ( $\geq$  RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep  $> 100$
6. Trace mode = Clear write
7. Measure  $T_{total}$  and  $T_{on}$
8. Calculate Duty Cycle =  $T_{on} / T_{total}$  and Duty Cycle Factor =  $10\log(1/\text{Duty Cycle})$

## 7.2. 6 dB Bandwidth

### Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

### Test Configuration



### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to

(Procedure 8.2 in KDB 558074 v05r02, Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

### 7.3. Output Power

#### Limit

The maximum permissible conducted output power is 1 Watt.

#### Test Configuration



#### Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)  
: Measure the peak power of the transmitter.
  
- Average Power (Procedure 8.3.2.3 in KDB 558074 v05r02, Procedure 11.9.2.3 in ANSI 63.10-2013)
  - 1) Measure the duty cycle.
  - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
  - 3) Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

#### Sample Calculation


- Conducted Output Power(Peak) = Measured Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Measured Value + ATT loss + Cable loss + Duty Cycle Factor

## 7.4. Power Spectral Density

### Limit

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3 kHz BW.

### Test Configuration



### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3)  $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$ .
- 4)  $VBW \geq 3 \times RBW$ .
- 5) Sweep = auto couple
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep  $\geq [2 \times \text{span} / RBW]$ .
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.  
If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11) if then duty factor shall be added to adjust the result if the duty cycle is less than 98 %

### Sample Calculation

- Power Spectral Density = Measured Value + ATT loss + Cable loss


## 7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

### Limit

The maximum conducted (average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.

[ Conducted > 30 dBc ]

### Test Configuration



### Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 8.5 in KDB 558074 v05r02, Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points  $\geq 2 \times$  Span/VBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

**Factors for frequency**

| Freq(MHz) | Factor(dB) |
|-----------|------------|
| 30        | 10.55      |
| 100       | 10.59      |
| 200       | 10.64      |
| 300       | 10.68      |
| 400       | 10.74      |
| 500       | 10.74      |
| 600       | 10.74      |
| 700       | 10.77      |
| 800       | 10.78      |
| 900       | 10.79      |
| 1000      | 10.84      |
| 2000      | 10.99      |
| 2400      | 11.05      |
| 2412      | 11.05      |
| 2437      | 11.05      |
| 2462      | 11.05      |
| 2500      | 11.03      |
| 3000      | 11.15      |
| 4000      | 11.21      |
| 5000      | 11.30      |
| 5700      | 11.37      |
| 5800      | 11.37      |
| 6000      | 11.58      |
| 7000      | 11.70      |
| 8000      | 11.69      |
| 9000      | 11.78      |
| 10000     | 11.88      |
| 11000     | 11.97      |
| 12000     | 12.06      |
| 13000     | 12.07      |
| 14000     | 12.11      |
| 15000     | 12.20      |
| 16000     | 12.29      |
| 17000     | 12.48      |
| 18000     | 12.62      |
| 19000     | 12.54      |
| 20000     | 12.21      |
| 21000     | 12.34      |

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss + EUT Cable loss




**7.6. Radiated Test**

**Limit**


| Frequency (MHz) | Field Strength ( $\mu\text{V/m}$ ) | Measurement Distance (m) |
|-----------------|------------------------------------|--------------------------|
| 0.009 – 0.490   | $2400/F(\text{kHz})$               | 300                      |
| 0.490 – 1.705   | $24000/F(\text{kHz})$              | 30                       |
| 1.705 – 30      | 30                                 | 30                       |
| 30-88           | 100                                | 3                        |
| 88-216          | 150                                | 3                        |
| 216-960         | 200                                | 3                        |
| Above 960       | 500                                | 3                        |

**Test Configuration**


Below 30 MHz

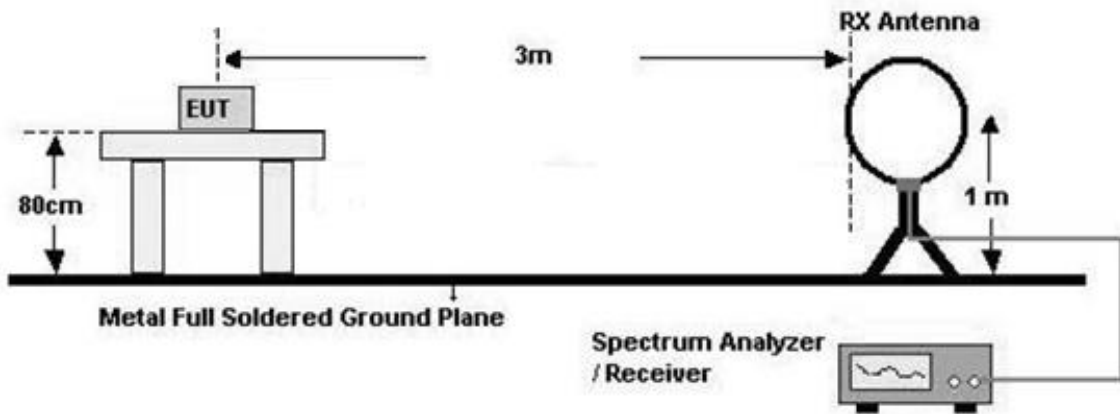

30 MHz - 1 GHz

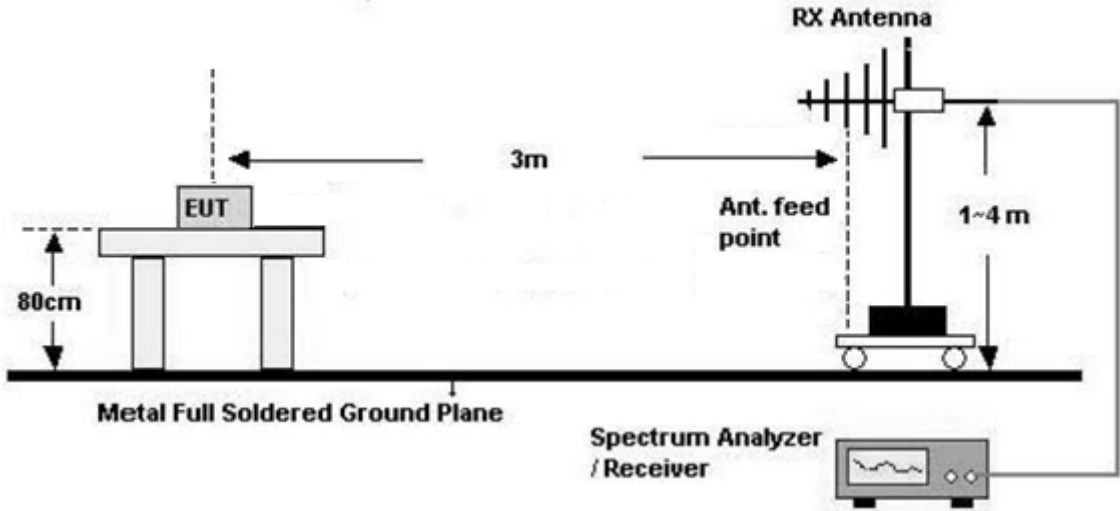

Above 1 GHz

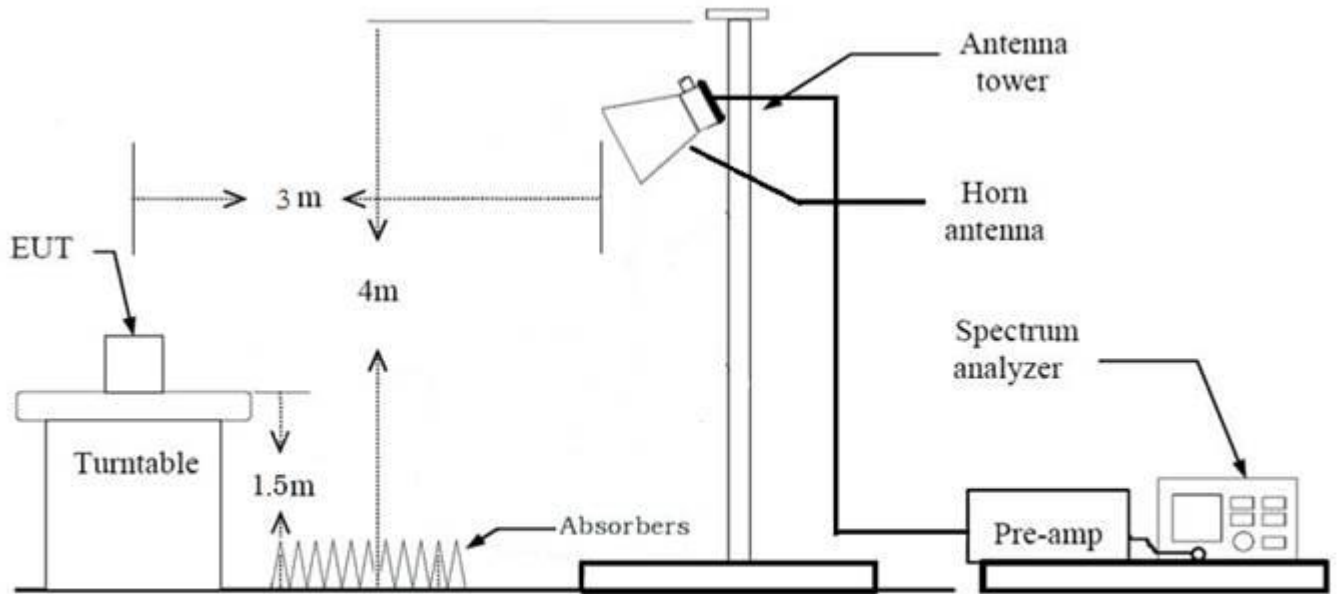

**Test Procedure of Radiated spurious emissions(Below 30 MHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) =  $40\log(3\text{ m}/300\text{ m}) = - 80\text{ dB}$   
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) =  $40\log(3\text{ m}/30\text{ m}) = - 40\text{ dB}$   
Measurement Distance : 3 m
8. Spectrum Setting
  - Frequency Range = 9 kHz ~ 30 MHz
  - Detector = Peak
  - Trace = Maxhold
  - RBW = 9 kHz
  - VBW  $\geq 3 \times$  RBW
9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**KDB 414788 OFS and Chamber Correlation Justification**

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

**Test Procedure of Radiated spurious emissions(Below 1 GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW  $\geq$  3 x RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

In general, (1) is used mainly

7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = Peak
    - Trace = Max hold
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Average):
    - Duty cycle < 98 %, duty cycle variations are less than  $\pm 2$  %
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = RMS
    - Averaging type = power (*i.e.*, RMS)
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
    - Sweep time = auto.
    - Trace mode = average (at least 100 traces).
    - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Distance extrapolation factor =  $20\log$  (test distance / specific distance) (dB)
11. Total (Measurement Type : Peak)
  - = Peak Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G)
  - + Distance Factor(D.F)

Total (Measurement Type : Average)

= Average Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G)  
+ Distance Factor(D.F) + Duty Cycle Factor

#### **Test Procedure of Radiated Restricted Band Edge**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
    - Detector = Peak
    - Trace = Max hold
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Average):
    - Duty cycle < 98 %, duty cycle variations are less than  $\pm 2$  %
    - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
    - Detector = RMS
    - Averaging type = power (i.e., RMS)
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
    - Sweep time = auto.
    - Trace mode = average (at least 100 traces).
    - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
    - Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)

11. Total(Measurement Type : Peak)

= Peak Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average)

= Average Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

+ Duty Cycle Factor

## 7.7. AC Power line Conducted Emissions

### Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

| Frequency Range (MHz) | Limits (dB $\mu$ V)     |                         |
|-----------------------|-------------------------|-------------------------|
|                       | Quasi-peak              | Average                 |
| 0.15 to 0.50          | 66 to 56 <sup>(a)</sup> | 56 to 46 <sup>(a)</sup> |
| 0.50 to 5             | 56                      | 46                      |
| 5 to 30               | 60                      | 50                      |

<sup>(a)</sup>Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

### Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

### Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor



## 7.8. Worst case configuration and mode

### Radiated Test

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone, Stand alone + External accessories(Earphone etc)
  - Worstcase : Stand alone
2. EUT Axis:
  - (1) Ant 1
    - Radiated Spurious Emissions : Y
    - Radiated Restricted Band Edge : X
  - (2) Ant 2
    - Radiated Spurious Emissions : Z
    - Radiated Restricted Band Edge : Y
3. All packet length of operation were investigated and the test results are worst case in lowest packet length.  
(Worst case :1M Bit/s 37 Byte, 2M Bit/s 37 Byte)  
(125k, 500k, 1M Bit/s all have the same 1MHz Band width and only Worst result is attached.)
4. All datarate of operation were investigated and the worst case configuration results are reported.
  - Worst case : 1 M, 2 M
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
  - Position : Horizontal, Vertical, Parallel to the ground plane
6. SM-S911B/DS, SM-S911B were tested and the worst case results are reported.  
(Worst case : SM-S911B/DS)

**Radiated test(DBS)**

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone, Stand alone + External accessories(Earphone, Keyboard, etc)
  - Worstcase : Stand alone
2. EUT Axis
  - Radiated Spurious Emissions : Z
3. All of RSDB Scenario were investigated and the worst case configuration results are reported.
  - Worst case : Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO

| RSDB Scenario  | 2.4 GHz WiFi Ant.1 | 2.4 GHz WiFi Ant.2 | 5 GHz WiFi Ant.1 | 5 GHz WiFi Ant.2 | 6 GHz WiFi Ant.1 | 6 GHz WiFi Ant.2 | Bluetooth Ant.1 | Bluetooth Ant.2 |
|--|--------------------|--------------------|------------------|------------------|------------------|------------------|-----------------|-----------------|
| 2.4 GHz WiFi MIMO + 6 GHz WiFi MIMO                    | on                 | on                 |                  |                  | on               | on               |                 |                 |
| 2.4 GHz WiFi MIMO + 5 GHz WiFi MIMO                    | on                 | on                 | on               | on               |                  |                  |                 |                 |
| Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO |                    | on                 | on               | on               |                  |                  | on              |                 |
| Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 6 GHz WiFi MIMO |                    | on                 |                  |                  | on               | on               | on              |                 |

| Non-DBS                           | 2.4 GHz WiFi Ant.1 | 2.4 GHz WiFi Ant.2 | 5 GHz WiFi Ant.1 | 5 GHz WiFi Ant.2 | 6 GHz WiFi Ant.1 | 6 GHz WiFi Ant.2 | Bluetooth Ant.1 | Bluetooth Ant.2 |
|-----------------------------------|--------------------|--------------------|------------------|------------------|------------------|------------------|-----------------|-----------------|
| Bluetooth ANT.2 + 6 GHz WiFi MIMO |                    |                    |                  |                  | on               | on               |                 | on              |
| Bluetooth ANT.2 + 5GHz WiFi MIMO  |                    |                    | on               | on               |                  |                  |                 | on              |
| Bluetooth ANT.1 + 6 GHz WiFi MIMO |                    |                    |                  |                  | on               | on               | on              |                 |
| Bluetooth ANT.1 + 5GHz WiFi MIMO  |                    |                    | on               | on               | -                | -                | on              | -               |

4. The following tables show the worst case configurations determined during testing.

(Worst case: The lowest margin condition the channels and modes were selected for test.)

(Test Result : Please refer to the SM-S911B/DS [BT] Test Report.)

| RSDB Scenario        | Description | Bluetooth Emission | 2.4GHz Emission    | 5 GHz Emission     |
|----------------------|-------------|--------------------|--------------------|--------------------|
| Bluetooth ANT.1 +    | Antenna     | ANT1               | ANT2               | Ant All            |
|                      | Channel     | 78                 | 1                  | 36                 |
| 2.4 GHz WiFi ANT.2 + | Data Rate   | 1 Mbps             | MCS 0              | MCS 0              |
| 5 GHz WiFi MIMO      | Mode        | $\pi/4$ DQPSK      | 802.11ax(HE20), SU | 802.11ax(HE20), SU |

**AC Power line Conducted Emissions**

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone + External accessories(Earphone etc) + Travel Adapter,  
Stand alone + Travel Adapter

- Worstcase : Stand alone + Travel Adapter

2. SM-S911B/DS, SM-S911B were tested and the worst case results are reported.

(Worst case : SM-S911B/DS)

**Conducted test**

1. The EUT was configured with packet length of highest power.

- ALL supported mode tested.
- Worst Results refer to Notes for each test item

2. SM-S911B/DS, SM-S911B were tested and the worst case results are reported.

(Worst case : SM-S911B/DS)

**8. SUMMARY TEST OF RESULTS**

| Test Description                  | FCC Part Section(s)              | Test Limit           | Test Condition | Test Result |
|-----------------------------------|----------------------------------|----------------------|----------------|-------------|
| 6 dB Bandwidth                    | §15.247(a)(2)                    | > 500 kHz            | Conducted      | PASS        |
| Conducted Maximum Output Power    | §15.247(b)(3)                    | < 1 Watt             |                | PASS        |
| Power Spectral Density            | §15.247(e)                       | < 8 dBm / 3 kHz Band |                | PASS        |
| Band Edge (Out of Band Emissions) | §15.247(d)                       | Conducted > 30 dBc   |                | PASS        |
| AC Power line Conducted Emissions | §15.207                          | cf. Section 7.7      |                | PASS        |
| Radiated Spurious Emissions       | §15.247(d),<br>15.205,<br>15.209 | cf. Section 7.6      | Radiated       | PASS        |
| Radiated Restricted Band Edge     | §15.247(d),<br>15.205,<br>15.209 | cf. Section 7.6      |                | PASS        |


**9. TEST RESULT**

**9.1 DUTY CYCLE**

| Data rate<br>(Bit/s) | Packet length<br>(Byte) | T <sub>on</sub><br>(ms) | T <sub>total</sub><br>(ms) | Duty Cycle | Duty Cycle Factor<br>(dB) |
|----------------------|-------------------------|-------------------------|----------------------------|------------|---------------------------|
| 1M                   | 37                      | 0.389                   | 0.756                      | 0.514      | 2.89                      |
|                      | 255                     | 2.135                   | 2.500                      | 0.854      | 0.69                      |
| 2M                   | 37                      | 0.204                   | 0.535                      | 0.381      | 4.19                      |
|                      | 255                     | 1.077                   | 1.410                      | 0.764      | 1.17                      |
| 125k                 | 37                      | 3.100                   | 4.110                      | 0.754      | 1.22                      |
|                      | 255                     | 17.070                  | 18.060                     | 0.945      | 0.24                      |
| 500k                 | 37                      | 1.065                   | 1.815                      | 0.587      | 2.32                      |
|                      | 255                     | 4.560                   | 5.310                      | 0.859      | 0.66                      |


1 M Bit/s (37 Byte) Test Plots

Duty Cycle (Low-CH 0)

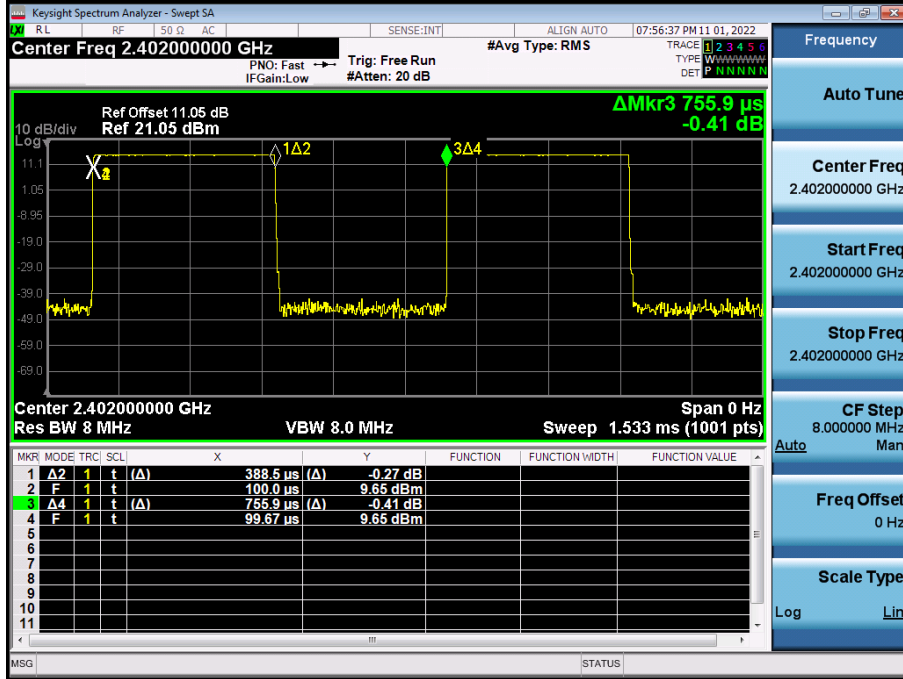


1 M Bit/s (255 Byte) Test Plots

Duty Cycle (Low-CH 0)

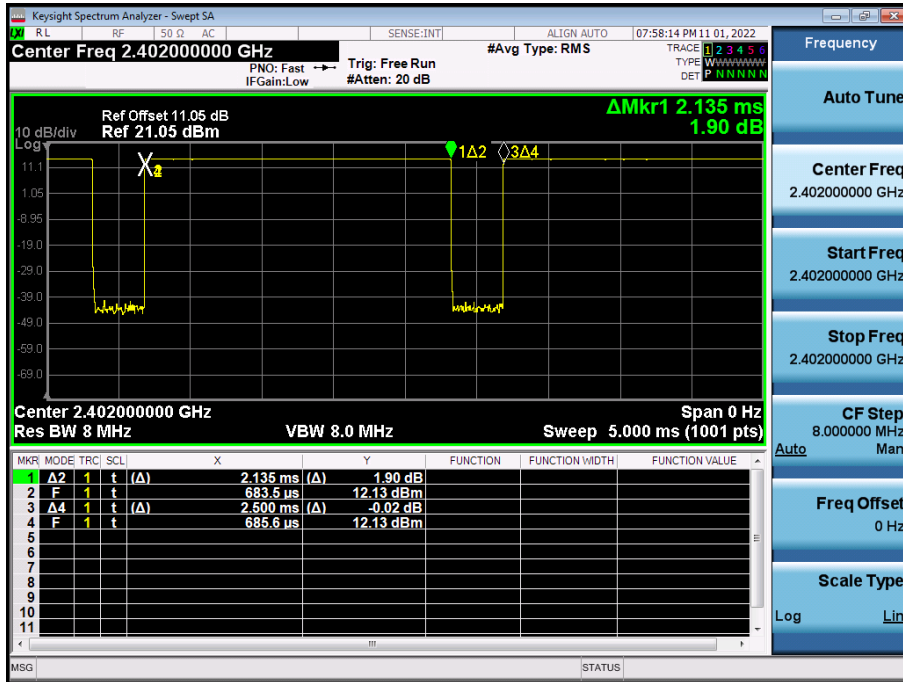


2 M Bit/s (37 Byte) Test Plots

Duty Cycle (Low-CH 0)

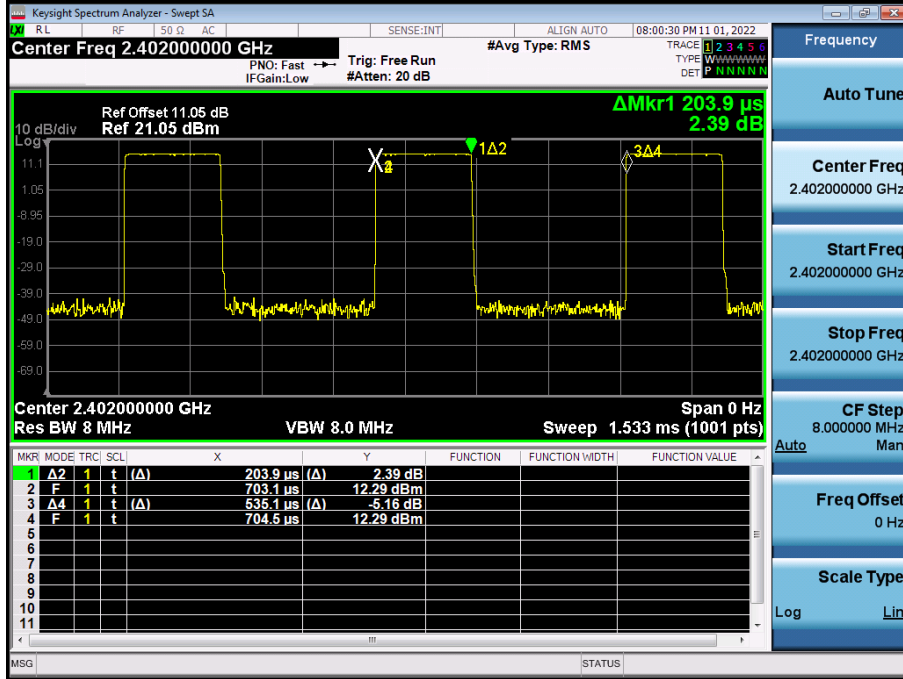


2 M Bit/s (255 Byte) Test Plots

Duty Cycle (Low-CH 0)

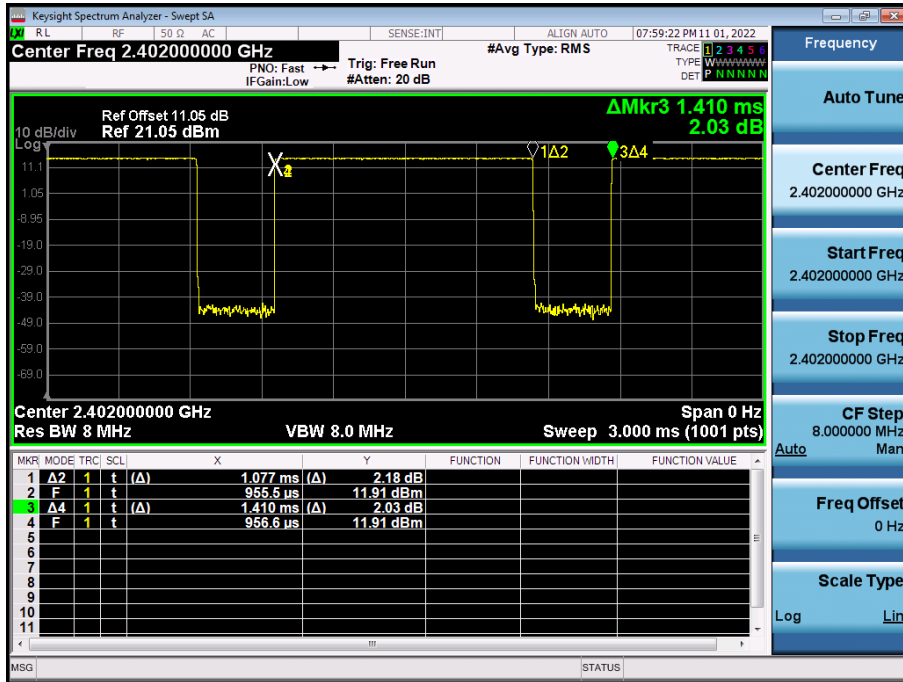


125 k Bit/s(37 Byte) Test Plots

Duty Cycle (Low-CH 0)

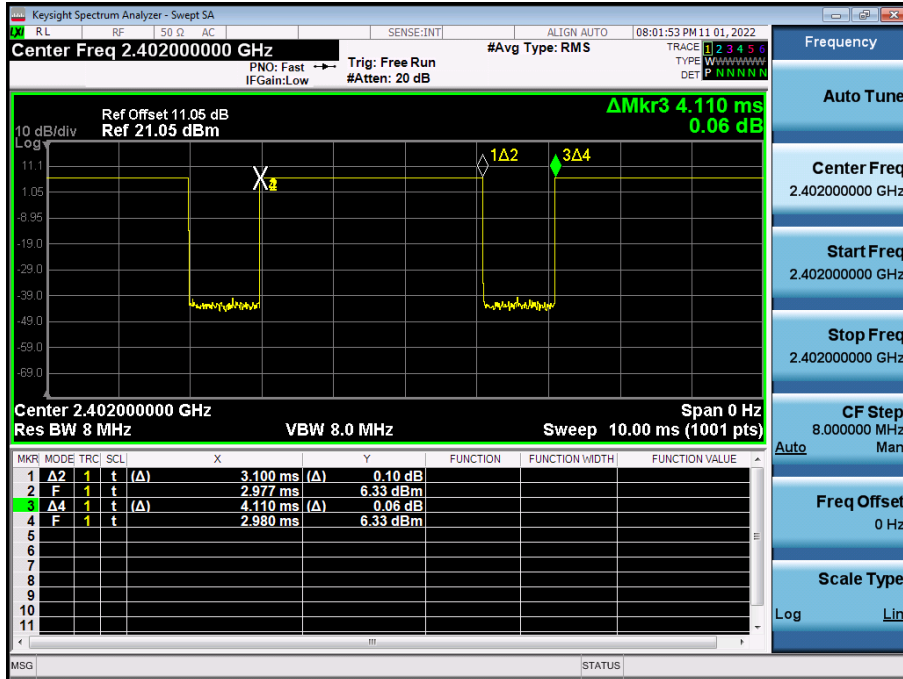

125 k Bit/s(255 Byte) Test Plots


Duty Cycle (Low-CH 0)

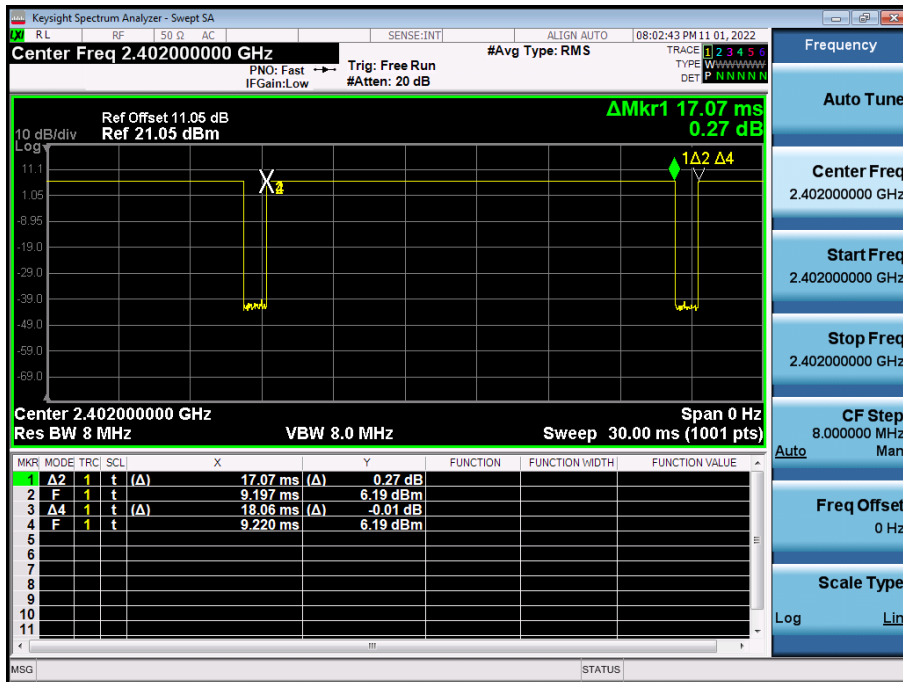




500 k Bit/s(37 Byte) Test Plots

Duty Cycle (Low-CH 0)

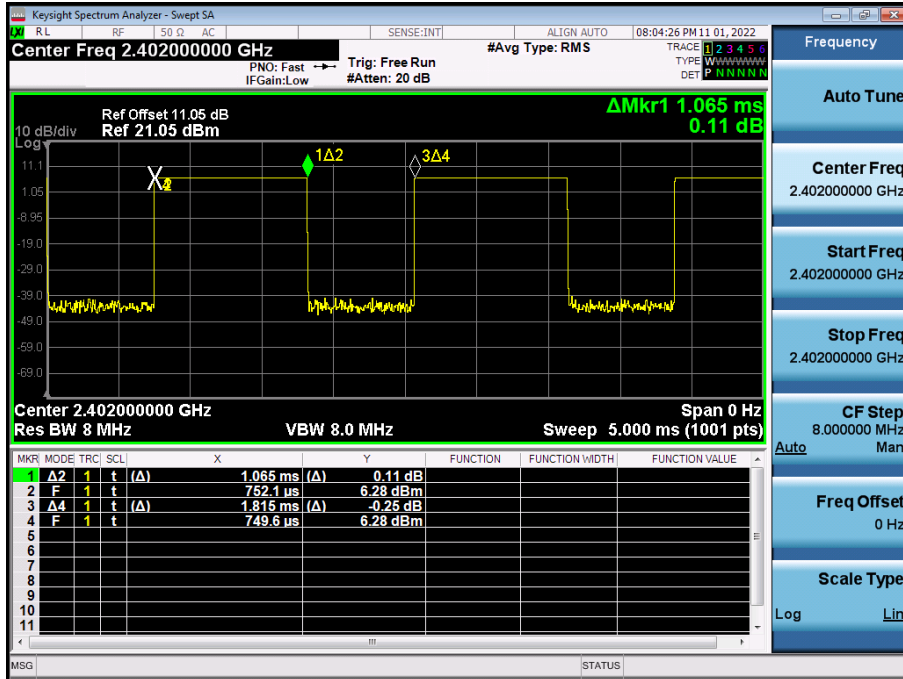

500 k Bit/s(255 Byte) Test Plots

Duty Cycle (Low-CH 0)

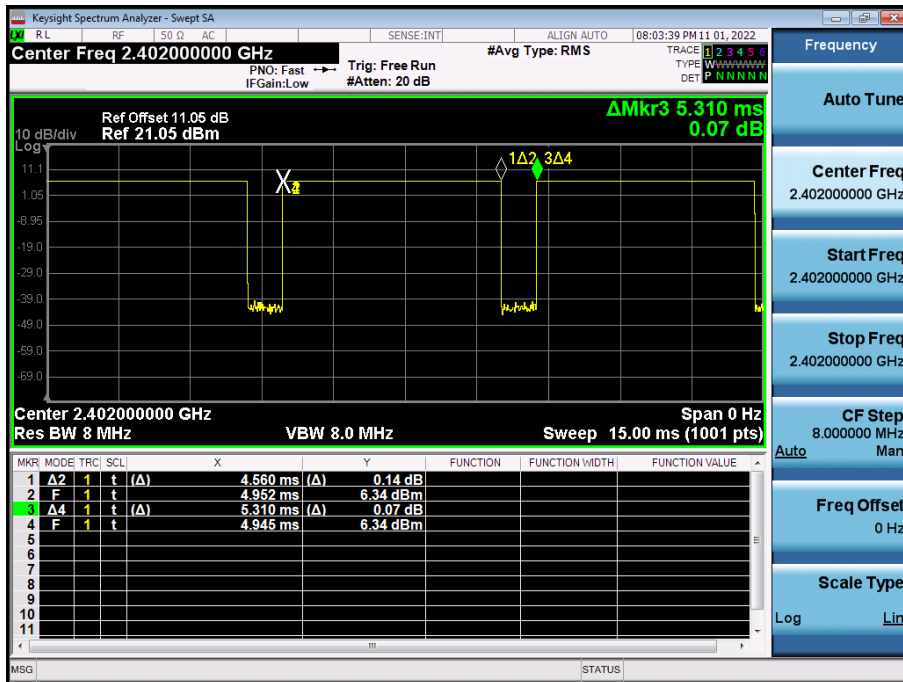

**9.2 6 dB BANDWIDTH**
**[Ant.1]**

| Mode (Bit/s) | Channel | 6 dB Bandwidth (kHz) | Limit (kHz) |
|--------------|---------|----------------------|-------------|
| 1M(37)       | 0       | 672.2                | > 500       |
|              | 19      | 669.1                |             |
|              | 39      | 671.0                |             |
| 1M(255)      | 0       | 667.3                | > 500       |
|              | 19      | 665.2                |             |
|              | 39      | 669.0                |             |
| 2M(37)       | 0       | 1140                 | > 500       |
|              | 19      | 1142                 |             |
|              | 39      | 1143                 |             |
| 2M(255)      | 0       | 1145                 | > 500       |
|              | 19      | 1153                 |             |
|              | 39      | 1157                 |             |
| 125k(37)     | 0       | 625.0                | > 500       |
|              | 19      | 625.8                |             |
|              | 39      | 624.8                |             |
| 125k(255)    | 0       | 626.5                | > 500       |
|              | 19      | 628.3                |             |
|              | 39      | 624.7                |             |
| 500k(37)     | 0       | 664.4                | > 500       |
|              | 19      | 662.5                |             |
|              | 39      | 662.3                |             |
| 500k(255)    | 0       | 664.9                | > 500       |
|              | 19      | 664.7                |             |
|              | 39      | 664.0                |             |

**Note:**

In order to simplify the report, attached plots were only the narrowest 6 dB BW Channel.

1M Bit/s: 255 Byte

2M Bit/s: 37 Byte

125k Bit/s: 255 Byte

500k Bit/s: 37 Byte

[Ant.2]

| Mode (Bit/s) | Channel | 6 dB Bandwidth (kHz) | Limit (kHz) |
|--------------|---------|----------------------|-------------|
| 1M(37)       | 0       | 673.0                | > 500       |
|              | 19      | 672.8                |             |
|              | 39      | 672.2                |             |
| 1M(255)      | 0       | 665.2                | > 500       |
|              | 19      | 670.0                |             |
|              | 39      | 667.3                |             |
| 2M(37)       | 0       | 1141                 | > 500       |
|              | 19      | 1140                 |             |
|              | 39      | 1141                 |             |
| 2M(255)      | 0       | 1150                 | > 500       |
|              | 19      | 1152                 |             |
|              | 39      | 1150                 |             |
| 125k(37)     | 0       | 625.3                | > 500       |
|              | 19      | 625.8                |             |
|              | 39      | 624.8                |             |
| 125k(255)    | 0       | 625.3                | > 500       |
|              | 19      | 633.4                |             |
|              | 39      | 625.8                |             |
| 500k(37)     | 0       | 664.4                | > 500       |
|              | 19      | 664.3                |             |
|              | 39      | 665.1                |             |
| 500k(255)    | 0       | 664.9                | > 500       |
|              | 19      | 665.2                |             |
|              | 39      | 667.0                |             |

**Note:**

In order to simplify the report, attached plots were only the narrowest 6 dB BW Channel

1M Bit/s: 255 Byte

2M Bit/s: 37 Byte


125k Bit/s: 37 Byte

500k Bit/s: 37 Byte


[Ant.1]

▣ 1 MBit/s (255 Byte) Test Plots


6 dB Bandwidth plot (Low-CH 0)

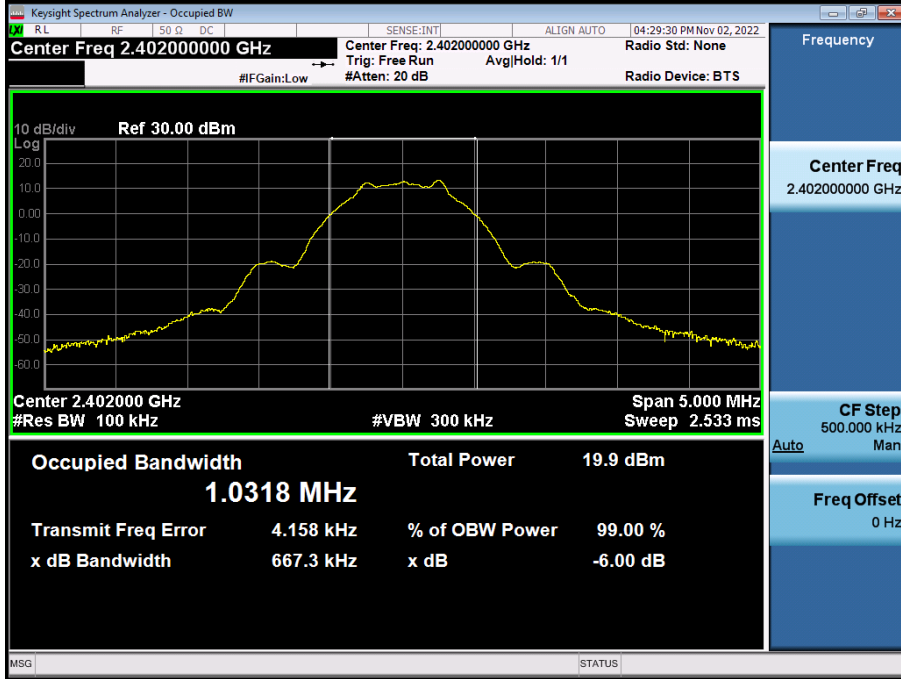

6 dB Bandwidth plot (Mid-CH 19)

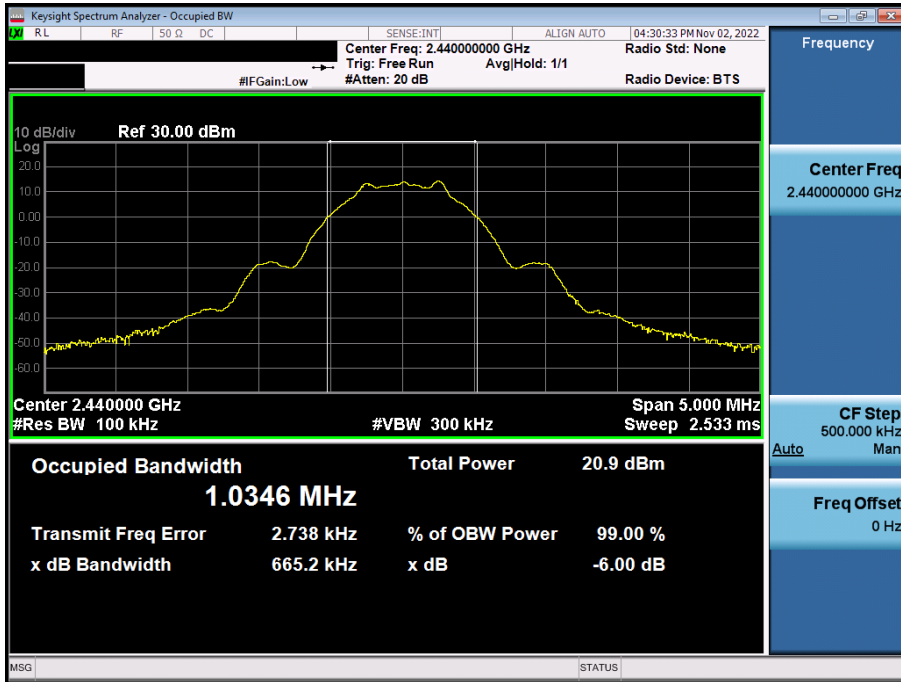


6 dB Bandwidth plot (High-CH 39)

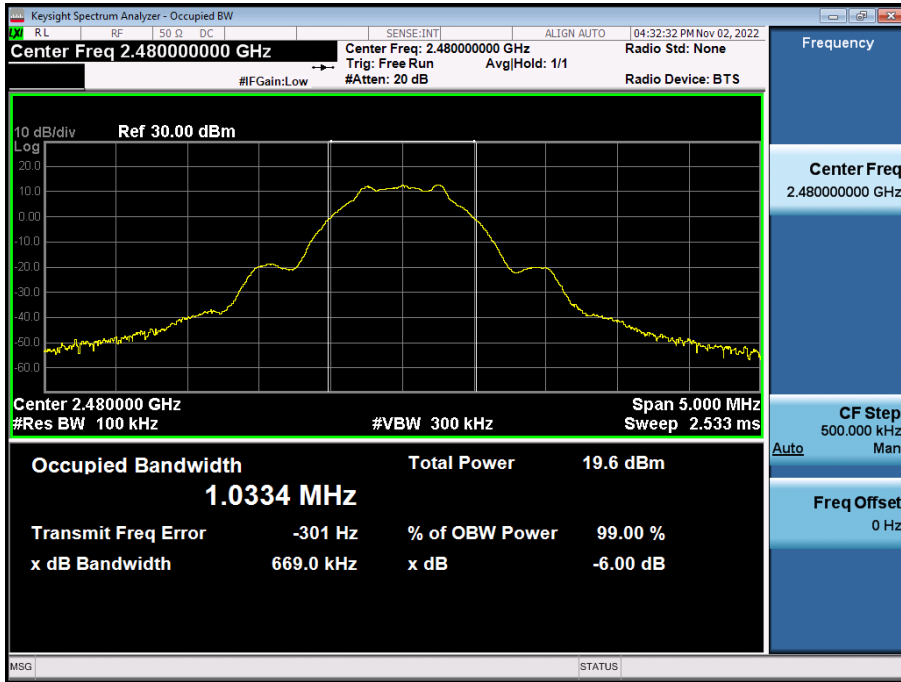


2 MBit/s (37 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)

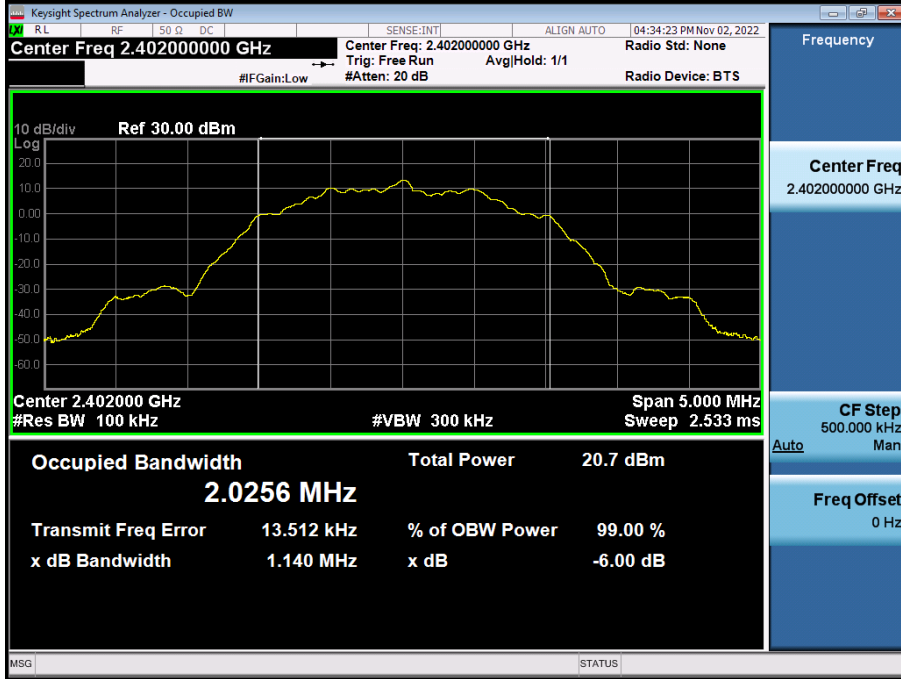

6 dB Bandwidth plot (Mid-CH 19)

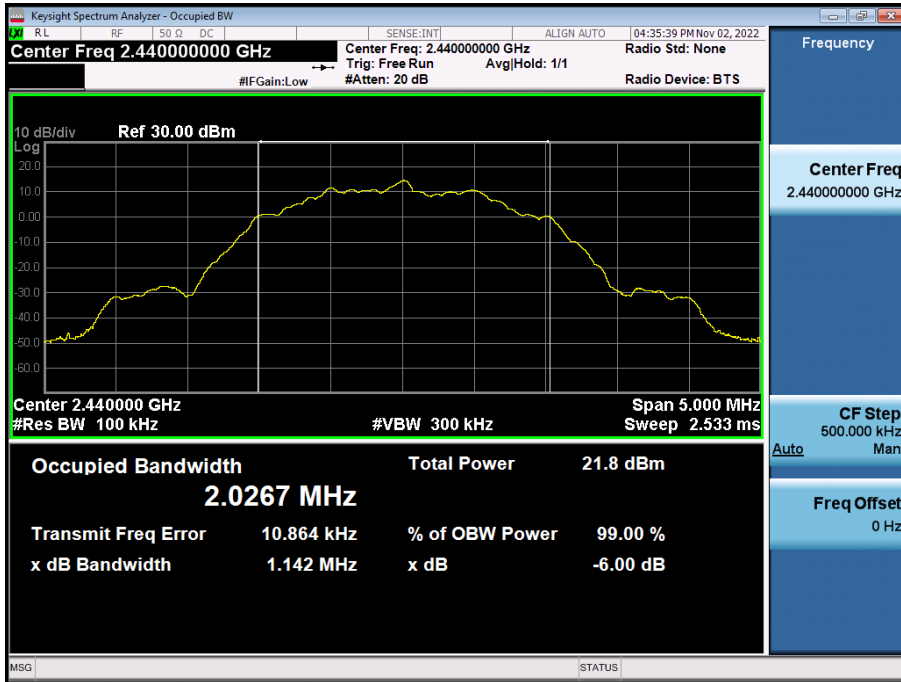


6 dB Bandwidth plot (High-CH 39)



125k Bit/s(255 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)

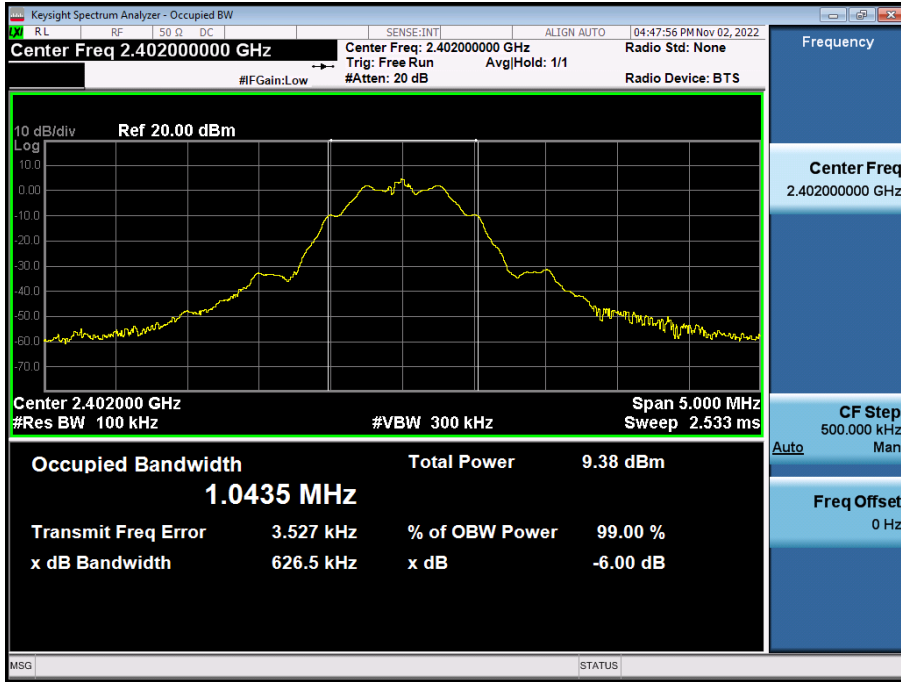


6 dB Bandwidth plot (Mid-CH 19)






6 dB Bandwidth plot (High-CH 39)

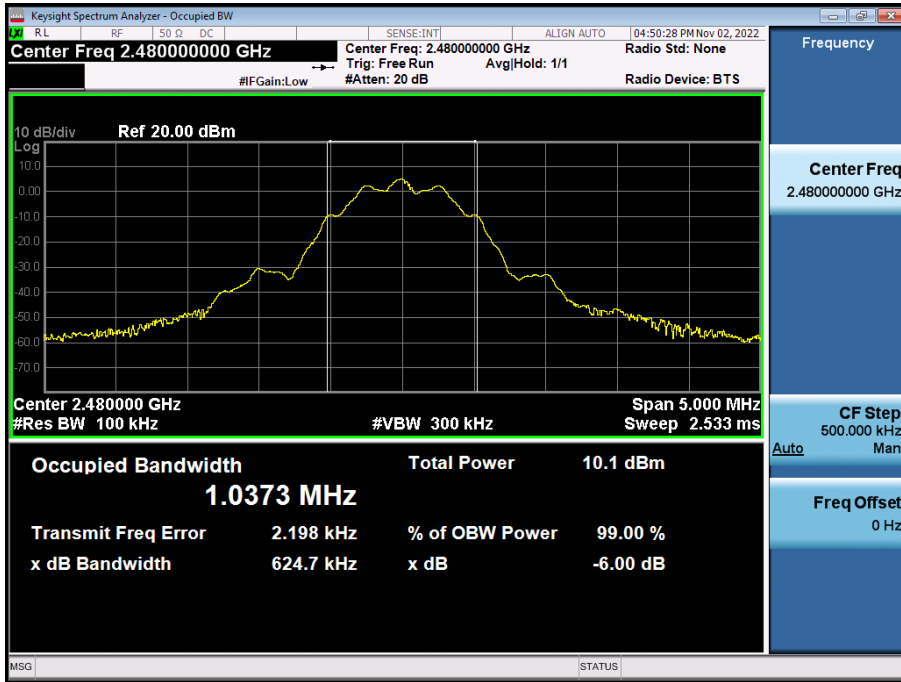


500k Bit/s(37 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)

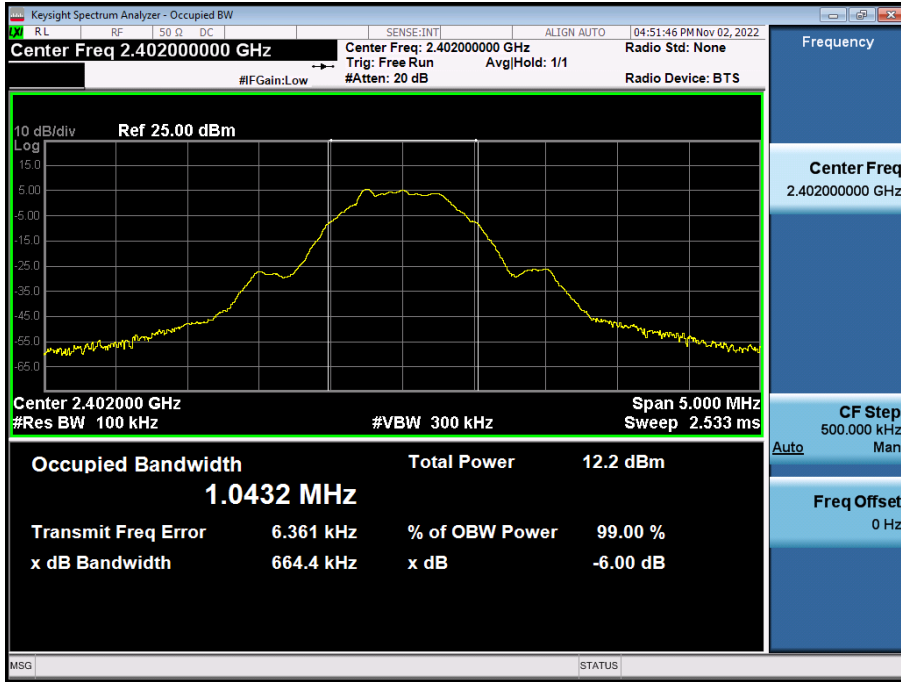

6 dB Bandwidth plot (Mid-CH 19)

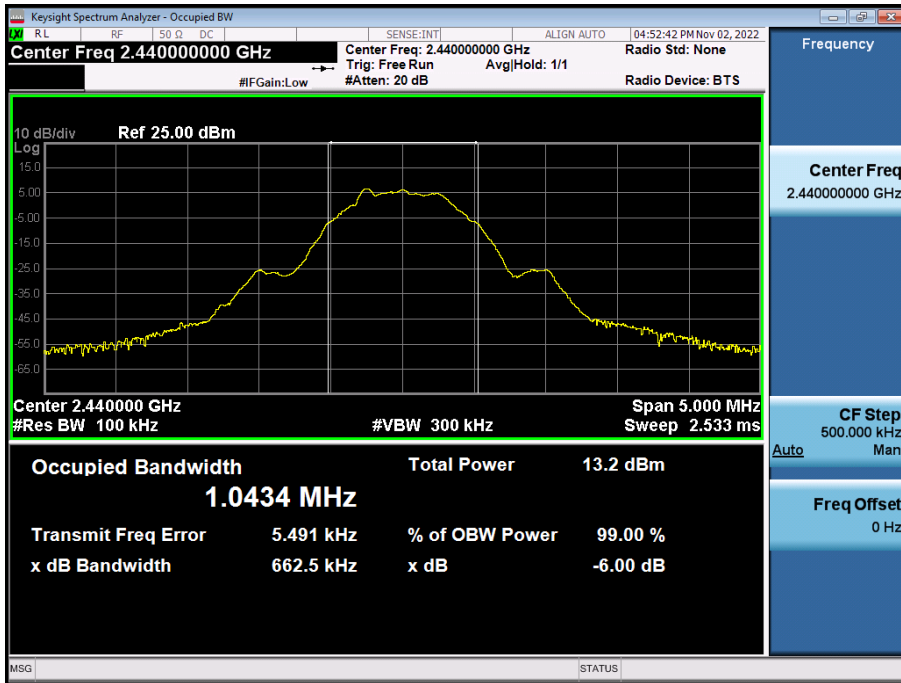

6 dB Bandwidth plot (High-CH 39)




[Ant.2]

▣ 1 MBit/s (255 Byte) Test Plots


6 dB Bandwidth plot (Low-CH 0)



6 dB Bandwidth plot (Mid-CH 19)

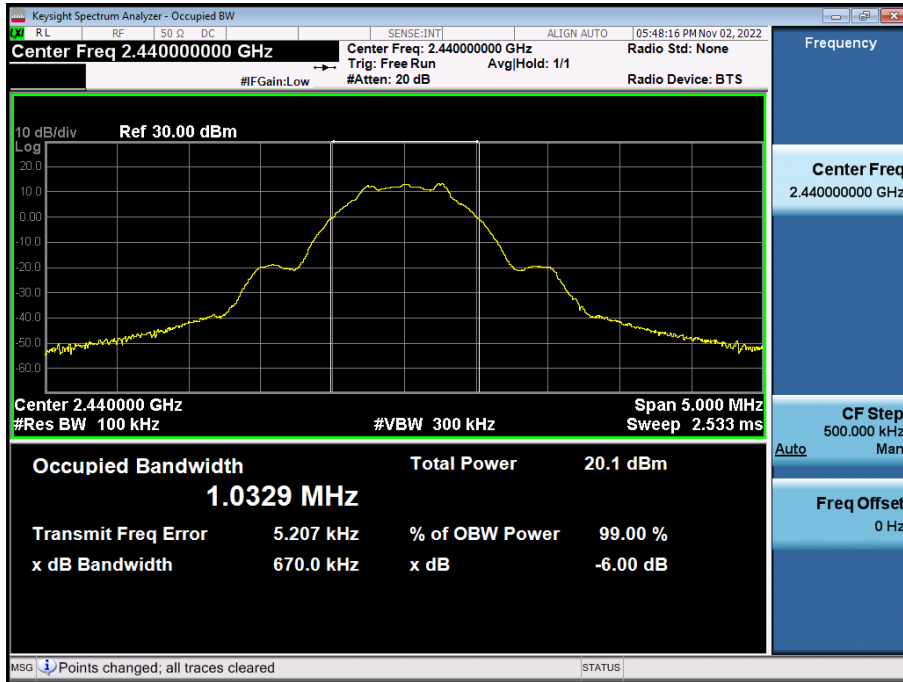


6 dB Bandwidth plot (High-CH 39)

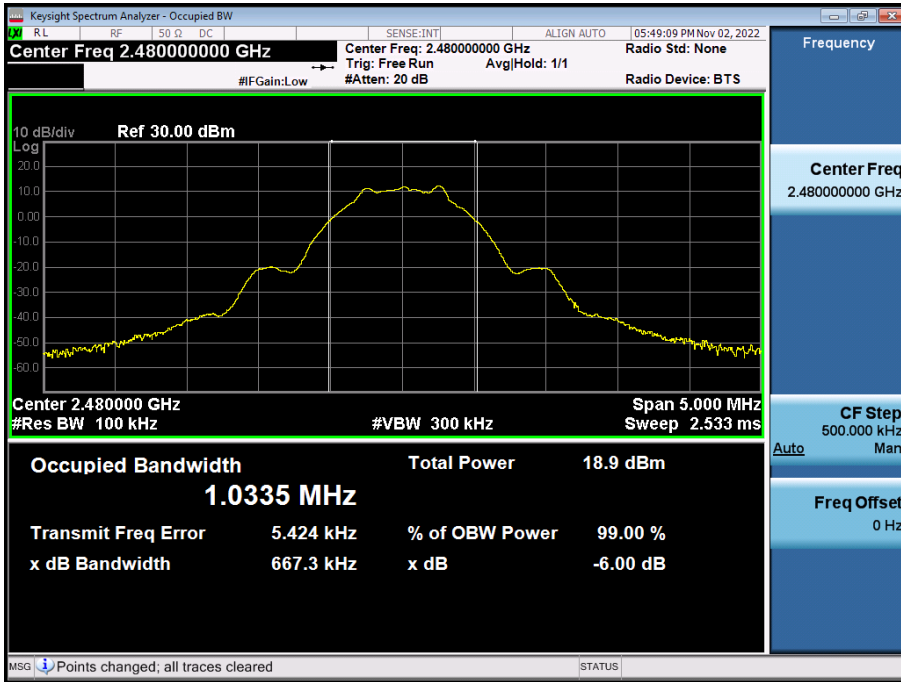


2 MBit/s (37 Byte) Test Plots


6 dB Bandwidth plot (Low-CH 0)

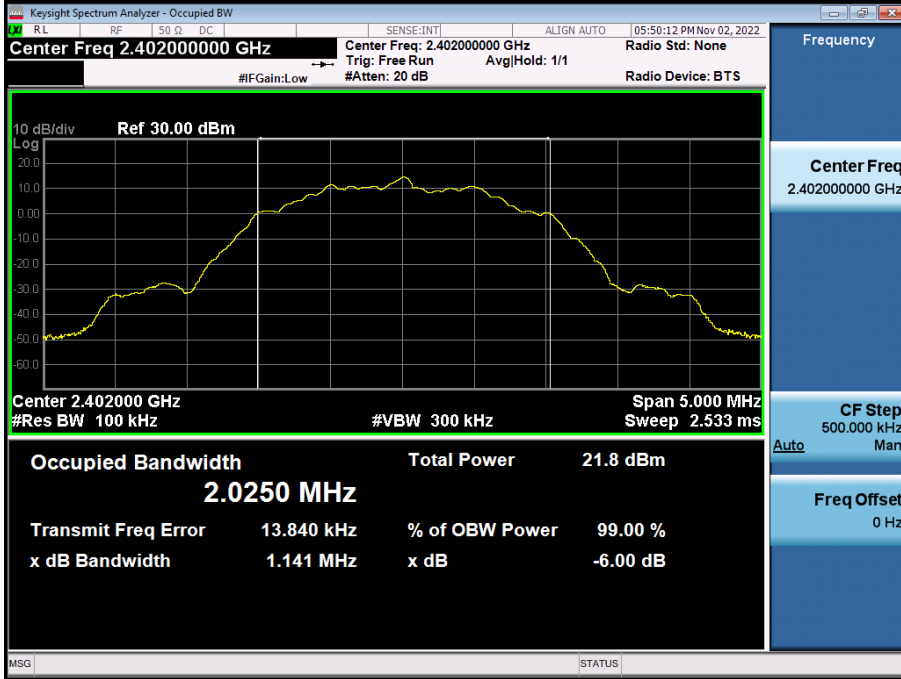

6 dB Bandwidth plot (Mid-CH 19)

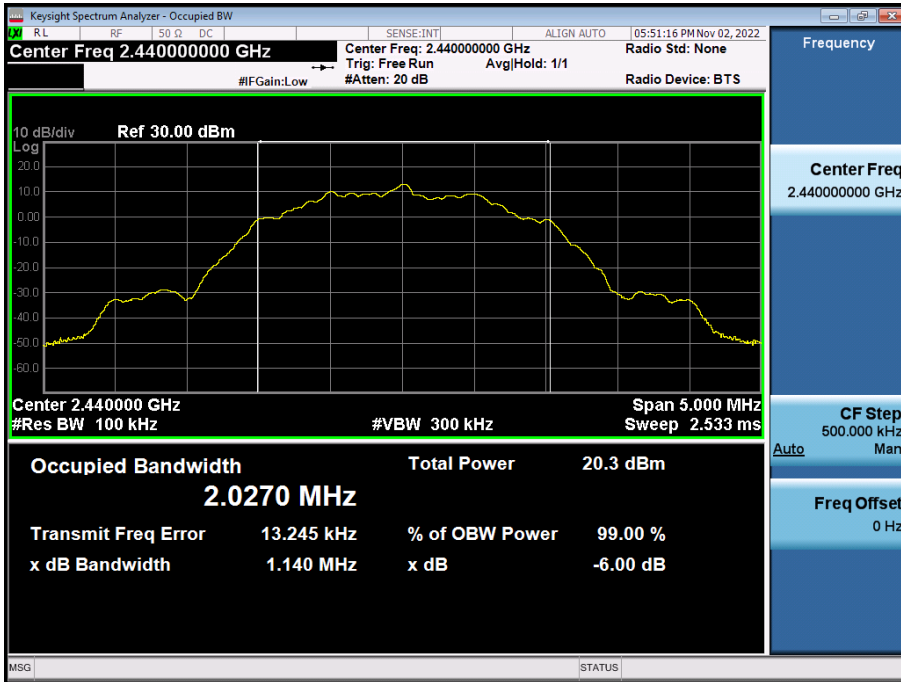

6 dB Bandwidth plot (High-CH 39)

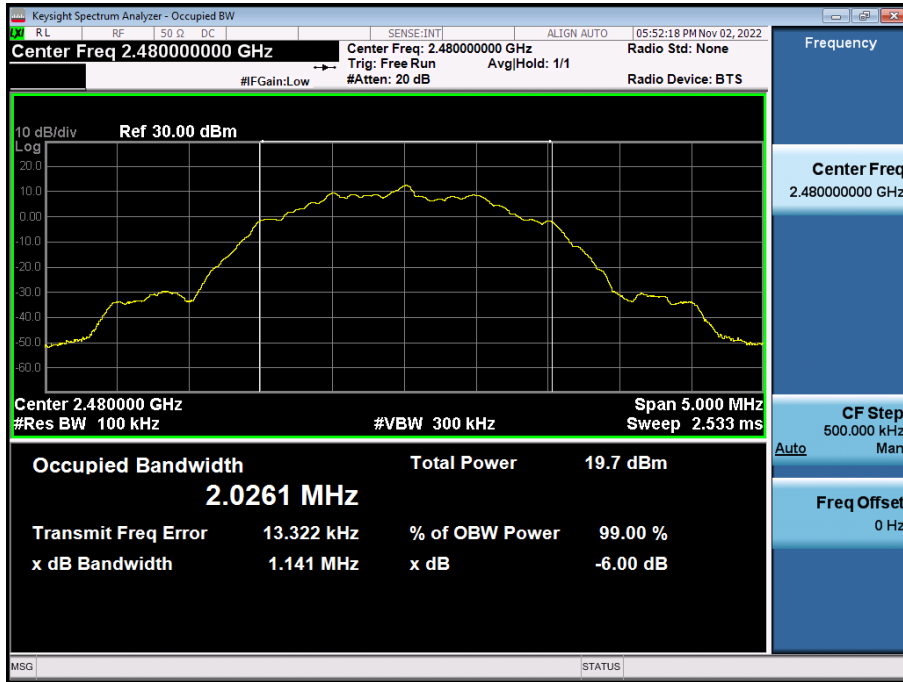


125k Bit/s(37 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)




6 dB Bandwidth plot (Mid-CH 19)

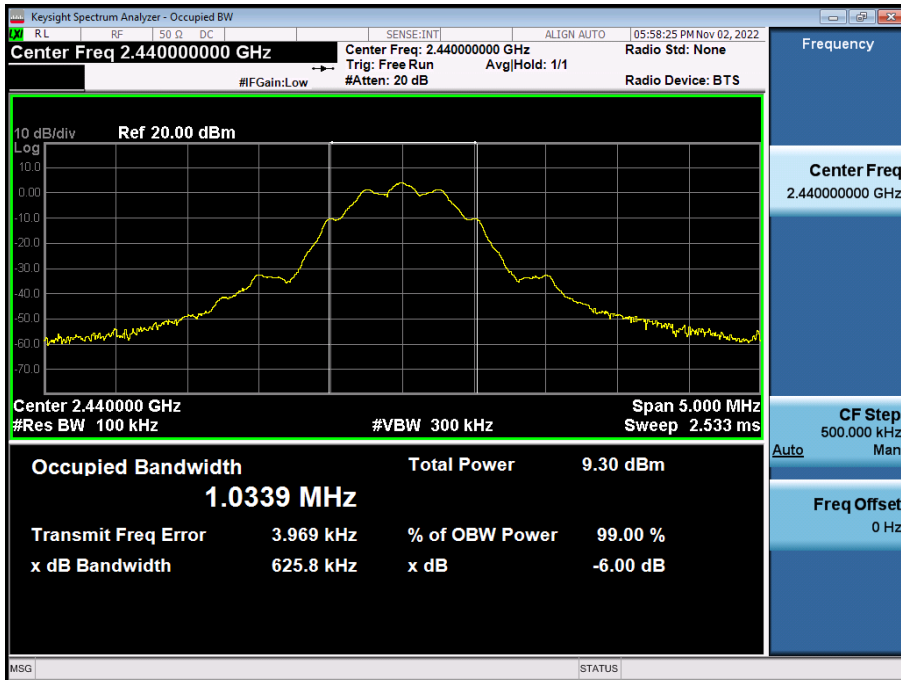




6 dB Bandwidth plot (High-CH 39)

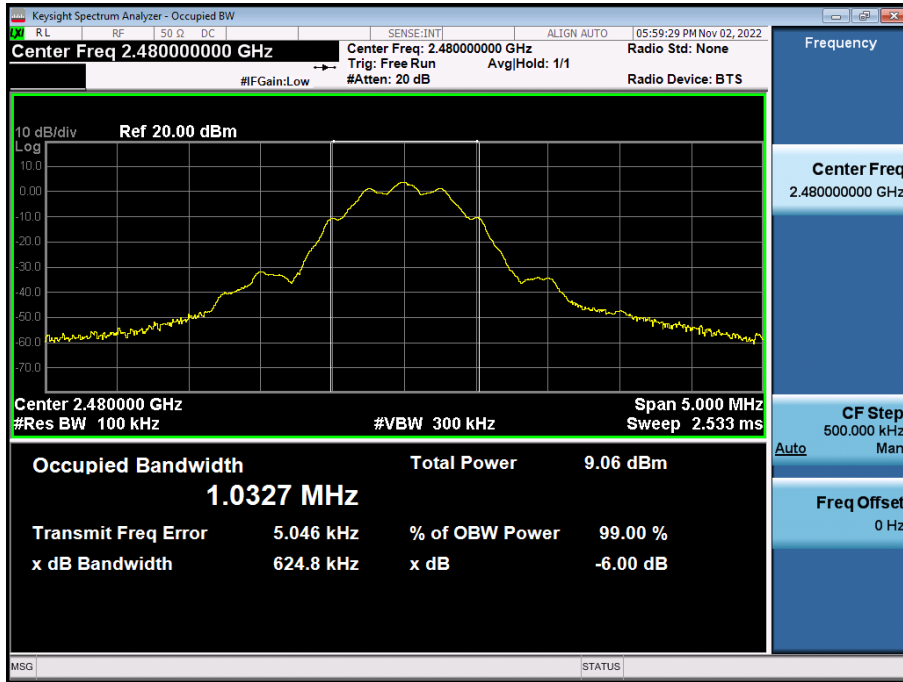


500k Bit/s(37 Byte) Test Plots


6 dB Bandwidth plot (Low-CH 0)

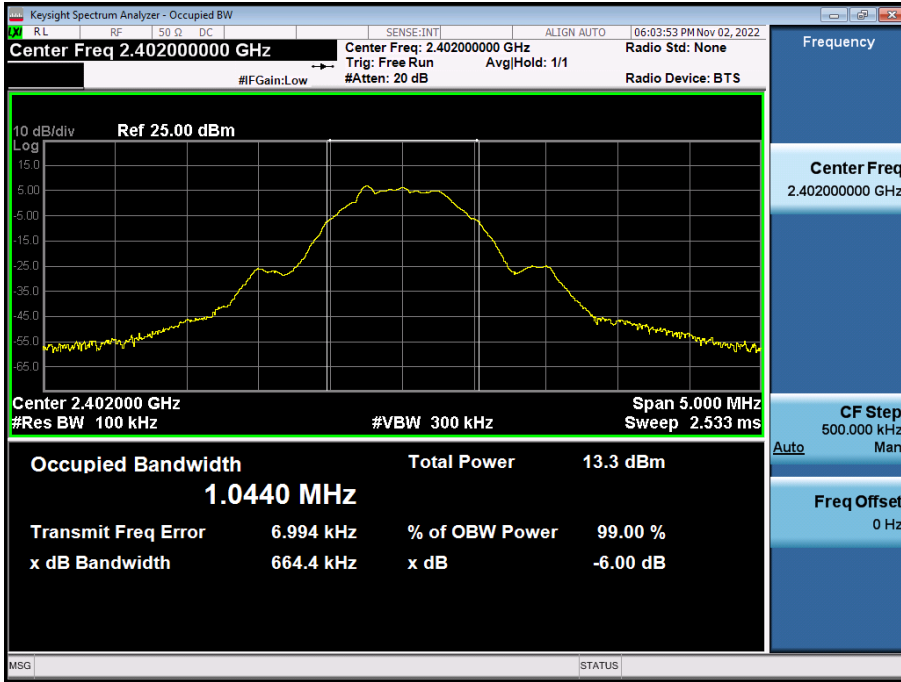

6 dB Bandwidth plot (Mid-CH 19)

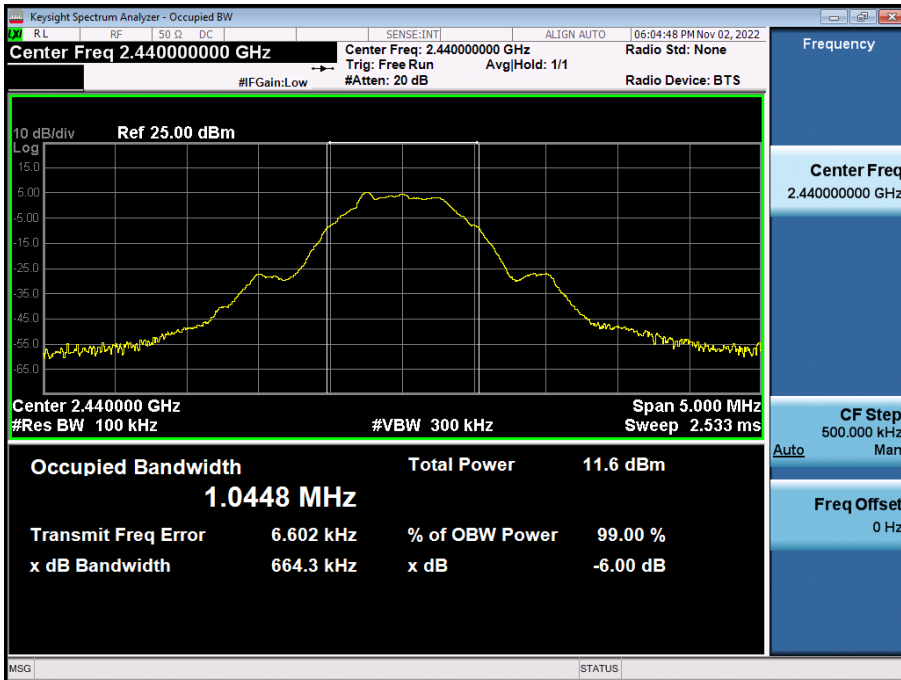

6 dB Bandwidth plot (High-CH 39)

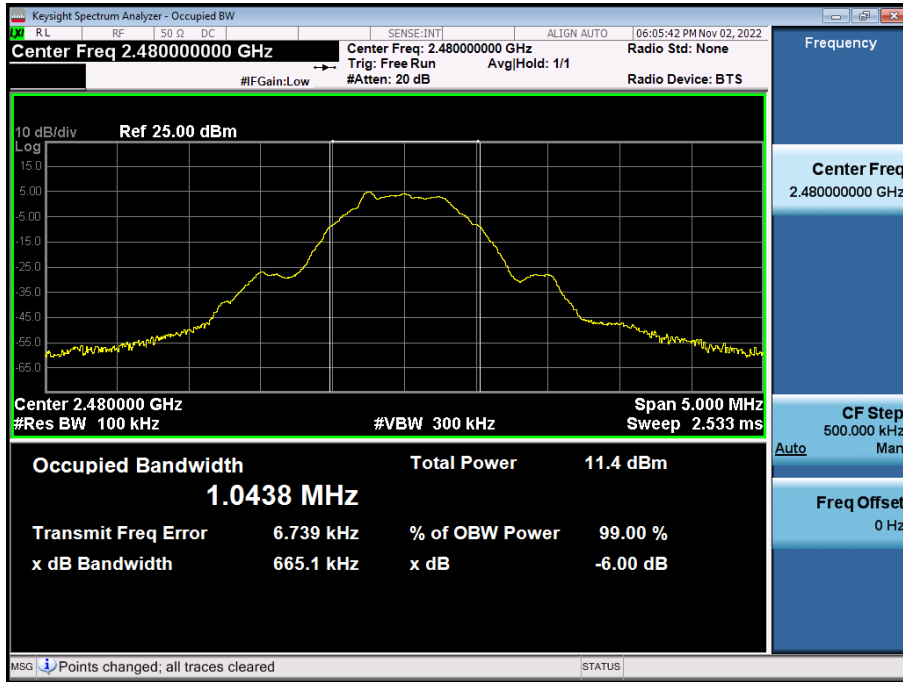

### 9.3 OUTPUT POWER

[Ant.1]

**Peak Power**

| Data rate<br>(Bit/s) | Packet length<br>(Byte) | LE Mode         |         | Measured Power(dBm) | Limit (dBm) |
|----------------------|-------------------------|-----------------|---------|---------------------|-------------|
|                      |                         | Frequency [MHz] | Channel |                     |             |
| 1M                   | 37                      | 2402            | 0       | 13.828              | 30          |
|                      |                         | 2440            | 19      | 15.378              |             |
|                      |                         | 2480            | 39      | 13.662              |             |
|                      | 255                     | 2402            | 0       | 13.338              |             |
|                      |                         | 2440            | 19      | 14.291              |             |
|                      |                         | 2480            | 39      | 13.057              |             |
| 2M                   | 37                      | 2402            | 0       | 14.097              |             |
|                      |                         | 2440            | 19      | 15.143              |             |
|                      |                         | 2480            | 39      | 14.047              |             |
|                      | 255                     | 2402            | 0       | 13.616              |             |
|                      |                         | 2440            | 19      | 14.635              |             |
|                      |                         | 2480            | 39      | 13.375              |             |
| 125k                 | 37                      | 2402            | 0       | 5.838               |             |
|                      |                         | 2440            | 19      | 6.728               |             |
|                      |                         | 2480            | 39      | 6.194               |             |
|                      | 255                     | 2402            | 0       | 5.776               |             |
|                      |                         | 2440            | 19      | 6.713               |             |
|                      |                         | 2480            | 39      | 6.195               |             |
| 500k                 | 37                      | 2402            | 0       | 5.770               |             |
|                      |                         | 2440            | 19      | 6.734               |             |
|                      |                         | 2480            | 39      | 6.231               |             |
|                      | 255                     | 2402            | 0       | 5.773               |             |
|                      |                         | 2440            | 19      | 6.744               |             |
|                      |                         | 2480            | 39      | 6.235               |             |

**Note :**

1. Power meter offset = Attenuator loss + Cable loss + EUT Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.  
So, 11.05 dB is offset for 2.4 GHz Band.

**[Ant.2]**

**Peak Power**

| Data rate<br>(Bit/s) | Packet length<br>(Byte) | LE Mode         |         | Measured Power(dBm) | Limit (dBm) |
|----------------------|-------------------------|-----------------|---------|---------------------|-------------|
|                      |                         | Frequency [MHz] | Channel |                     |             |
| 1M                   | 37                      | 2402            | 0       | 14.926              | 30          |
|                      |                         | 2440            | 19      | 13.409              |             |
|                      |                         | 2480            | 39      | 12.813              |             |
|                      | 255                     | 2402            | 0       | 14.374              |             |
|                      |                         | 2440            | 19      | 13.522              |             |
|                      |                         | 2480            | 39      | 12.295              |             |
| 2M                   | 37                      | 2402            | 0       | 15.249              |             |
|                      |                         | 2440            | 19      | 13.705              |             |
|                      |                         | 2480            | 39      | 13.124              |             |
|                      | 255                     | 2402            | 0       | 14.679              |             |
|                      |                         | 2440            | 19      | 13.221              |             |
|                      |                         | 2480            | 39      | 12.632              |             |
| 125k                 | 37                      | 2402            | 0       | 6.859               |             |
|                      |                         | 2440            | 19      | 5.182               |             |
|                      |                         | 2480            | 39      | 4.939               |             |
|                      | 255                     | 2402            | 0       | 6.830               |             |
|                      |                         | 2440            | 19      | 5.148               |             |
|                      |                         | 2480            | 39      | 4.938               |             |
| 500k                 | 37                      | 2402            | 0       | 6.864               |             |
|                      |                         | 2440            | 19      | 5.201               |             |
|                      |                         | 2480            | 39      | 4.950               |             |
|                      | 255                     | 2402            | 0       | 6.835               |             |
|                      |                         | 2440            | 19      | 5.148               |             |
|                      |                         | 2480            | 39      | 4.905               |             |

**Note :**

1. Power meter offset = Attenuator loss + Cable loss + EUT Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.  
So, 11.05 dB is offset for 2.4 GHz Band.

**[Ant.1]**

**Average Power**

| Data rate<br>(Bit/s) | Packet length<br>(Byte) | LE Mode         |         | Measured Power<br>(dBm) | Duty Cycle Factor<br>(dB) | Result<br>(dBm) | Limit<br>(dBm) |
|----------------------|-------------------------|-----------------|---------|-------------------------|---------------------------|-----------------|----------------|
|                      |                         | Frequency [MHz] | Channel |                         |                           |                 |                |
| 1M                   | 37                      | 2402            | 0       | 10.71                   | 2.89                      | 13.60           | 30             |
|                      |                         | 2440            | 19      | 11.73                   | 2.89                      | 14.62           |                |
|                      |                         | 2480            | 39      | 10.54                   | 2.89                      | 13.43           |                |
|                      | 255                     | 2402            | 0       | 12.37                   | 0.69                      | 13.06           |                |
|                      |                         | 2440            | 19      | 13.48                   | 0.69                      | 14.17           |                |
|                      |                         | 2480            | 39      | 12.14                   | 0.69                      | 12.83           |                |
| 2M                   | 37                      | 2402            | 0       | 9.42                    | 4.19                      | 13.61           |                |
|                      |                         | 2440            | 19      | 10.61                   | 4.19                      | 14.80           |                |
|                      |                         | 2480            | 39      | 9.39                    | 4.19                      | 13.58           |                |
|                      | 255                     | 2402            | 0       | 11.98                   | 1.17                      | 13.15           |                |
|                      |                         | 2440            | 19      | 13.09                   | 1.17                      | 14.26           |                |
|                      |                         | 2480            | 39      | 11.76                   | 1.17                      | 12.93           |                |
| 125k                 | 37                      | 2402            | 0       | 4.49                    | 1.22                      | 5.71            |                |
|                      |                         | 2440            | 19      | 5.35                    | 1.22                      | 6.57            |                |
|                      |                         | 2480            | 39      | 4.81                    | 1.22                      | 6.03            |                |
|                      | 255                     | 2402            | 0       | 5.38                    | 0.24                      | 5.62            |                |
|                      |                         | 2440            | 19      | 6.33                    | 0.24                      | 6.57            |                |
|                      |                         | 2480            | 39      | 5.76                    | 0.24                      | 6.00            |                |
| 500k                 | 37                      | 2402            | 0       | 3.32                    | 2.32                      | 5.64            |                |
|                      |                         | 2440            | 19      | 4.35                    | 2.32                      | 6.67            |                |
|                      |                         | 2480            | 39      | 3.81                    | 2.32                      | 6.13            |                |
|                      | 255                     | 2402            | 0       | 4.94                    | 0.66                      | 5.60            |                |
|                      |                         | 2440            | 19      | 5.95                    | 0.66                      | 6.61            |                |
|                      |                         | 2480            | 39      | 5.40                    | 0.66                      | 6.06            |                |

**Note :**

1. Power meter offset = Attenuator loss + Cable loss + EUT Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.  
So, 11.05 dB is offset for 2.4 GHz Band.

[Ant.2]

Average Power

| Data rate<br>(Bit/s) | Packet length<br>(Byte) | LE Mode         |         | Measured Power<br>(dBm) | Duty Cycle Factor<br>(dB) | Result<br>(dBm) | Limit<br>(dBm) |
|----------------------|-------------------------|-----------------|---------|-------------------------|---------------------------|-----------------|----------------|
|                      |                         | Frequency [MHz] | Channel |                         |                           |                 |                |
| 1M                   | 37                      | 2402            | 0       | 11.84                   | 2.89                      | 14.73           | 30             |
|                      |                         | 2440            | 19      | 10.33                   | 2.89                      | 13.22           |                |
|                      |                         | 2480            | 39      | 9.71                    | 2.89                      | 12.60           |                |
|                      | 255                     | 2402            | 0       | 14.02                   | 0.69                      | 14.71           |                |
|                      |                         | 2440            | 19      | 12.61                   | 0.69                      | 13.30           |                |
|                      |                         | 2480            | 39      | 11.82                   | 0.69                      | 12.51           |                |
| 2M                   | 37                      | 2402            | 0       | 10.63                   | 4.19                      | 14.82           |                |
|                      |                         | 2440            | 19      | 9.23                    | 4.19                      | 13.42           |                |
|                      |                         | 2480            | 39      | 8.51                    | 4.19                      | 12.70           |                |
|                      | 255                     | 2402            | 0       | 13.06                   | 1.17                      | 14.23           |                |
|                      |                         | 2440            | 19      | 11.60                   | 1.17                      | 12.77           |                |
|                      |                         | 2480            | 39      | 11.49                   | 1.17                      | 12.66           |                |
| 125k                 | 37                      | 2402            | 0       | 5.46                    | 1.22                      | 6.68            |                |
|                      |                         | 2440            | 19      | 3.81                    | 1.22                      | 5.03            |                |
|                      |                         | 2480            | 39      | 3.56                    | 1.22                      | 4.78            |                |
|                      | 255                     | 2402            | 0       | 6.45                    | 0.24                      | 6.69            |                |
|                      |                         | 2440            | 19      | 4.78                    | 0.24                      | 5.02            |                |
|                      |                         | 2480            | 39      | 4.53                    | 0.24                      | 4.77            |                |
| 500k                 | 37                      | 2402            | 0       | 4.38                    | 2.32                      | 6.70            |                |
|                      |                         | 2440            | 19      | 2.86                    | 2.32                      | 5.18            |                |
|                      |                         | 2480            | 39      | 2.55                    | 2.32                      | 4.87            |                |
|                      | 255                     | 2402            | 0       | 6.09                    | 0.66                      | 6.75            |                |
|                      |                         | 2440            | 19      | 4.34                    | 0.66                      | 5.00            |                |
|                      |                         | 2480            | 39      | 4.07                    | 0.66                      | 4.73            |                |

**Note :**

1. Power meter offset = Attenuator loss + Cable loss + EUT Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.  
So, 11.05 dB is offset for 2.4 GHz Band.

## 9.4 POWER SPECTRAL DENSITY

[Ant.1]

| Frequency (MHz) | Channel No. | Mode                 | Test Result              |                       |                       | Limit            |
|-----------------|-------------|----------------------|--------------------------|-----------------------|-----------------------|------------------|
|                 |             |                      | Measured PSD (dBm/3 kHz) | Duty Cycle Factor(dB) | Total PSD (dBm/ 3kHz) |                  |
| 2402            | 0           | 1 MBit/s<br>37 Byte  | -5.818                   | 2.89                  | -2.927                | 8 dBm /<br>3 kHz |
| 2440            | 19          |                      | -5.267                   | 2.89                  | -2.376                |                  |
| 2480            | 39          |                      | -6.052                   | 2.89                  | -3.161                |                  |
| 2402            | 0           | 1 MBit/s<br>255 Byte | -8.168                   | 0.69                  | -7.483                |                  |
| 2440            | 19          |                      | -7.910                   | 0.69                  | -7.225                |                  |
| 2480            | 39          |                      | -9.206                   | 0.69                  | -8.521                |                  |
| 2402            | 0           | 2 MBit/s<br>37 Byte  | -8.596                   | 4.19                  | -4.406                |                  |
| 2440            | 19          |                      | -7.407                   | 4.19                  | -3.217                |                  |
| 2480            | 39          |                      | -8.639                   | 4.19                  | -4.449                |                  |
| 2402            | 0           | 2 MBit/s<br>255 Byte | -11.326                  | 1.17                  | -10.156               |                  |
| 2440            | 19          |                      | -10.125                  | 1.17                  | -8.955                |                  |
| 2480            | 39          |                      | -11.588                  | 1.17                  | -10.418               |                  |
| 2402            | 0           | 125k<br>37 Byte      | -2.318                   | 1.22                  | -1.093                |                  |
| 2440            | 19          |                      | -1.494                   | 1.22                  | -0.269                |                  |
| 2480            | 39          |                      | -1.901                   | 1.22                  | -0.676                |                  |
| 2402            | 0           | 125k<br>255 Byte     | -1.250                   | 0.24                  | -1.005                |                  |
| 2440            | 19          |                      | -0.911                   | 0.24                  | -0.666                |                  |
| 2480            | 39          |                      | -0.891                   | 0.24                  | -0.646                |                  |
| 2402            | 0           | 500k<br>37 Byte      | -9.285                   | 2.32                  | -6.970                |                  |
| 2440            | 19          |                      | -8.313                   | 2.32                  | -5.998                |                  |
| 2480            | 39          |                      | -8.319                   | 0.66                  | -7.658                |                  |
| 2402            | 0           | 500k<br>255 Byte     | -12.456                  | 0.66                  | -11.795               |                  |
| 2440            | 19          |                      | -11.871                  | 0.66                  | -11.210               |                  |
| 2480            | 39          |                      | -11.443                  | 0.66                  | -10.782               |                  |

### Note :

1. Spectrum measured Value not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss + Cable loss + EUT Cable loss

3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.

So, 11.05 dB is offset for 2.4 GHz Band.

4. Total PSD = Measured PSD + Duty Cycle Factor

5. In order to simplify the report, The plots were attached with the highest PSD Mode.

Worst case : 125k Bit/s (37 Byte)



**[Ant.2]**

| Frequency (MHz) | Channel No. | Mode                 | Test Result              |                       |                       | Limit (dBm)      |
|-----------------|-------------|----------------------|--------------------------|-----------------------|-----------------------|------------------|
|                 |             |                      | Measured PSD (dBm/3 kHz) | Duty Cycle Factor(dB) | Total PSD (dBm/ 3kHz) |                  |
| 2402            | 0           | 1 MBit/s<br>37 Byte  | -4.760                   | 2.89                  | -1.869                | 8 dBm /<br>3 kHz |
| 2440            | 19          |                      | -5.887                   | 2.89                  | -2.996                |                  |
| 2480            | 39          |                      | -6.826                   | 2.89                  | -3.935                |                  |
| 2402            | 0           | 1 MBit/s<br>255 Byte | -7.062                   | 0.69                  | -6.377                |                  |
| 2440            | 19          |                      | -8.145                   | 0.69                  | -7.460                |                  |
| 2480            | 39          |                      | -9.284                   | 0.69                  | -8.599                |                  |
| 2402            | 0           | 2 MBit/s<br>37 Byte  | -7.507                   | 4.19                  | -3.317                |                  |
| 2440            | 19          |                      | -8.996                   | 4.19                  | -4.806                |                  |
| 2480            | 39          |                      | -9.162                   | 4.19                  | -4.972                |                  |
| 2402            | 0           | 2 MBit/s<br>255 Byte | -10.024                  | 1.17                  | -8.854                |                  |
| 2440            | 19          |                      | -11.680                  | 1.17                  | -10.510               |                  |
| 2480            | 39          |                      | -11.736                  | 1.17                  | -10.566               |                  |
| 2402            | 0           | 125k<br>37 Byte      | -1.621                   | 1.22                  | -0.396                |                  |
| 2440            | 19          |                      | -2.962                   | 1.22                  | -1.737                |                  |
| 2480            | 39          |                      | -3.411                   | 1.22                  | -2.186                |                  |
| 2402            | 0           | 125k<br>255 Byte     | -0.346                   | 0.24                  | -0.101                |                  |
| 2440            | 19          |                      | -2.051                   | 0.24                  | -1.806                |                  |
| 2480            | 39          |                      | -2.274                   | 0.24                  | -2.029                |                  |
| 2402            | 0           | 500k<br>37 Byte      | -7.311                   | 2.32                  | -4.996                |                  |
| 2440            | 19          |                      | -8.102                   | 2.32                  | -5.787                |                  |
| 2480            | 39          |                      | -9.559                   | 0.66                  | -8.898                |                  |
| 2402            | 0           | 500k<br>255 Byte     | -9.984                   | 0.66                  | -9.323                |                  |
| 2440            | 19          |                      | -12.058                  | 0.66                  | -11.397               |                  |
| 2480            | 39          |                      | -12.581                  | 0.66                  | -11.920               |                  |

**Note :**

1. Spectrum measured Value not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss + Cable loss + EUT Cable loss

3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.

So, 11.05 dB is offset for 2.4 GHz Band.

4. Total PSD = Measured PSD + Duty Cycle Factor

5. In order to simplify the report, The plots were attached with the highest PSD Mode.

Worst case : 125k Bit/s (255 Byte)

[Ant.1]

125k Bit/s (37 Byte) Test Plots

Power Spectral Density (Low-CH 0)



Power Spectral Density (Mid-CH 19)




Power Spectral Density (High-CH 39)




[Ant.2]

▣ 125k Bit/s (255 Byte) Test Plots

Power Spectral Density (Low-CH 0)

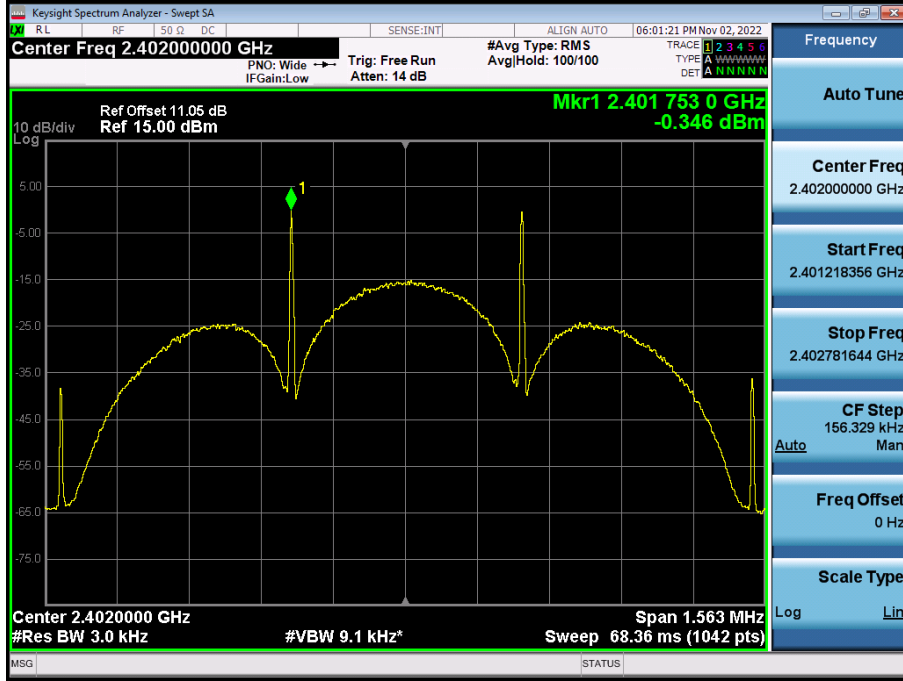

Power Spectral Density (Mid-CH 19)

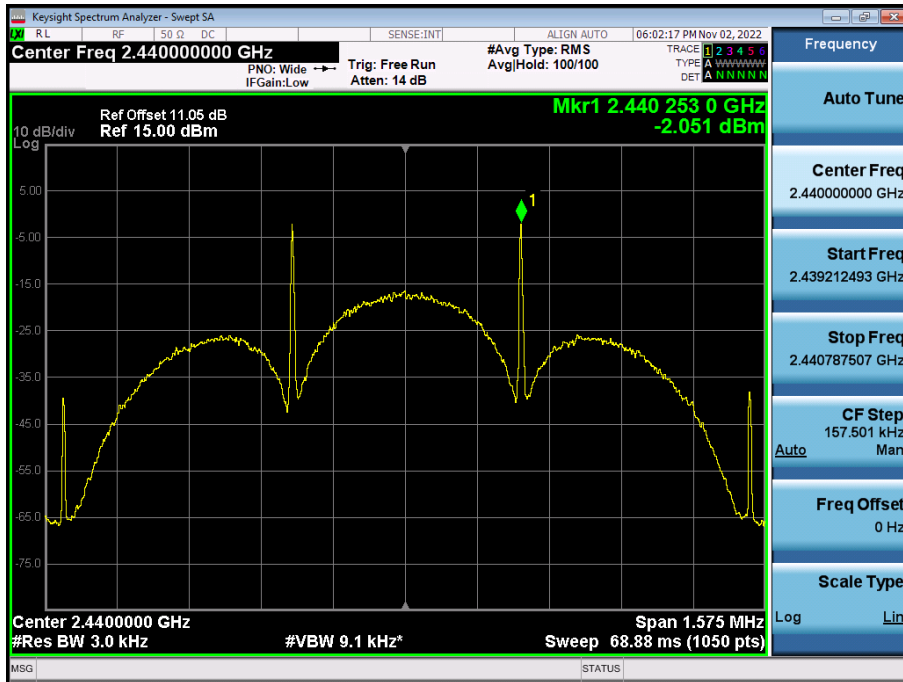

Power Spectral Density (High-CH 39)



**9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS**

[Ant.1]

[BAND EDGE]

| Frequency (MHz) | Mode                | Channel No. | Position | Test Result         |             |
|-----------------|---------------------|-------------|----------|---------------------|-------------|
|                 |                     |             |          | Measured Level (dB) | Limit (dBc) |
| 2402            | 1M Bit/s 37 Byte    | 0           | Lower    | 59.211              | 30          |
| 2480            |                     | 39          | Upper    | 61.344              | 30          |
| 2402            | 1M Bit/s 255 Byte   | 0           | Lower    | 61.037              | 30          |
| 2480            |                     | 39          | Upper    | 62.173              | 30          |
| 2402            | 2M Bit/s 37 Byte    | 0           | Lower    | 46.373              | 30          |
| 2480            |                     | 39          | Upper    | 62.734              | 30          |
| 2402            | 2M Bit/s 255 Byte   | 0           | Lower    | 46.504              | 30          |
| 2480            |                     | 39          | Upper    | 61.543              | 30          |
| 2402            | 125k Bit/s 37 Byte  | 0           | Lower    | 58.831              | 30          |
| 2480            |                     | 39          | Upper    | 64.258              | 30          |
| 2402            | 125k Bit/s 255 Byte | 0           | Lower    | 58.964              | 30          |
| 2480            |                     | 39          | Upper    | 63.454              | 30          |
| 2402            | 500k Bit/s 37 Byte  | 0           | Lower    | 59.265              | 30          |
| 2480            |                     | 39          | Upper    | 61.466              | 30          |
| 2402            | 500k Bit/s 255 Byte | 0           | Lower    | 61.821              | 30          |
| 2480            |                     | 39          | Upper    | 64.868              | 30          |

**Note :**

- In order to simplify the report, attached plots were only the worst case channel and data rate.
  - Lower Band Edge 2M Bit/s (37 Byte)
  - Upper Band Edge 1M Bit/s (37 Byte)

**[CONDUCTED SPURIOUS EMISSIONS]**

**Note :**

- In order to simplify the report, attached plots were only the worst case channel and data rate. Worst case 1M Bit/s (37 Byte)

**[Ant.2]**

**[BAND EDGE]**

| Frequency (MHz) | Mode                | Channel No. | Position | Test Result         |             |
|-----------------|---------------------|-------------|----------|---------------------|-------------|
|                 |                     |             |          | Measured Level (dB) | Limit (dBc) |
| 2402            | 1M Bit/s 37 Byte    | 0           | Lower    | 59.597              | 30          |
| 2480            |                     | 39          | Upper    | 60.879              | 30          |
| 2402            | 1M Bit/s 255 Byte   | 0           | Lower    | 59.734              | 30          |
| 2480            |                     | 39          | Upper    | 60.456              | 30          |
| 2402            | 2M Bit/s 37 Byte    | 0           | Lower    | 46.903              | 30          |
| 2480            |                     | 39          | Upper    | 60.615              | 30          |
| 2402            | 2M Bit/s 255 Byte   | 0           | Lower    | 45.326              | 30          |
| 2480            |                     | 39          | Upper    | 60.748              | 30          |
| 2402            | 125k Bit/s 37 Byte  | 0           | Lower    | 58.047              | 30          |
| 2480            |                     | 39          | Upper    | 61.431              | 30          |
| 2402            | 125k Bit/s 255 Byte | 0           | Lower    | 60.003              | 30          |
| 2480            |                     | 39          | Upper    | 59.615              | 30          |
| 2402            | 500k Bit/s 37 Byte  | 0           | Lower    | 60.368              | 30          |
| 2480            |                     | 39          | Upper    | 59.831              | 30          |
| 2402            | 500k Bit/s 255 Byte | 0           | Lower    | 58.784              | 30          |
| 2480            |                     | 39          | Upper    | 59.472              | 30          |

**Note :**

- In order to simplify the report, attached plots were only the worst case channel and data rate.
  - Lower 2M Bit/s (255 Byte)
  - Upper 500k Bit/s (255 Byte)

**[CONDUCTED SPURIOUS EMISSIONS]**

**Note :**

- In order to simplify the report, attached plots were only the worst case channel and data rate. Worst case 1M Bit/s (37 Byte)

[Ant.1]


▣ 2M Bit/s (37 Byte) Test Plots –Band Edge

Low-CH 0



▣ 1M Bit/s (37 Byte) Test Plots –Band Edge

High-CH 39

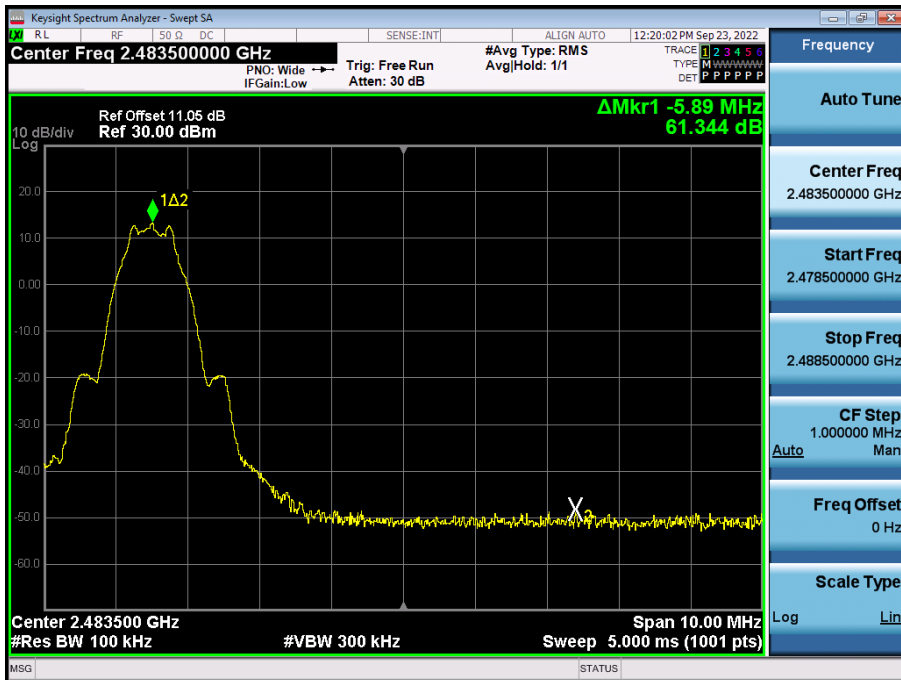




**1M Bit/s (37 Byte) Test Plots -Conducted Spurious Emission**


30 MHz ~ 1 GHz

Conducted Spurious Emission (Mid-CH 19)

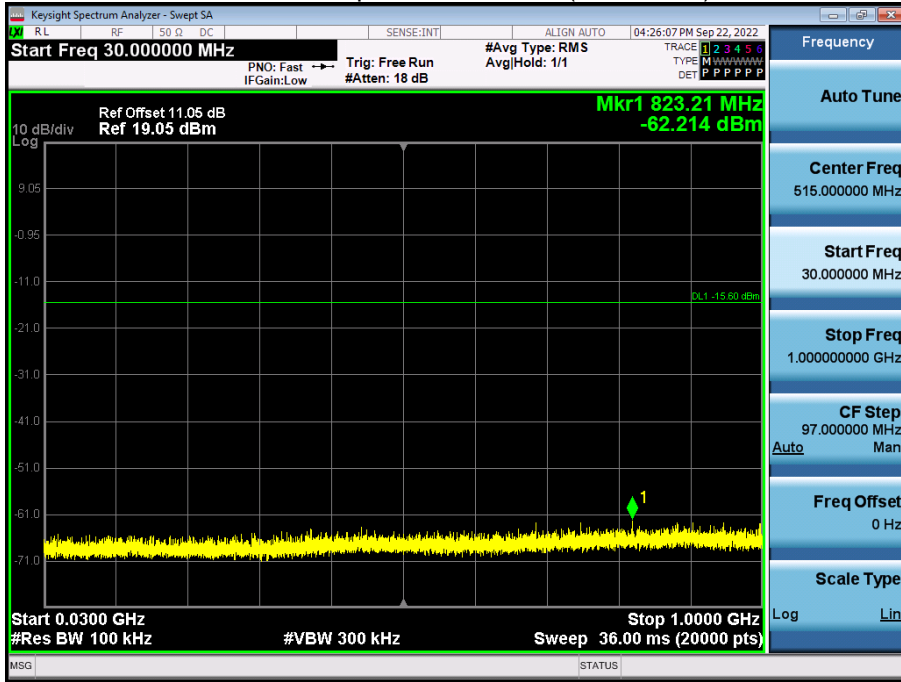


1 GHz ~ 3 GHz

Conducted Spurious Emission (Mid-CH 19)

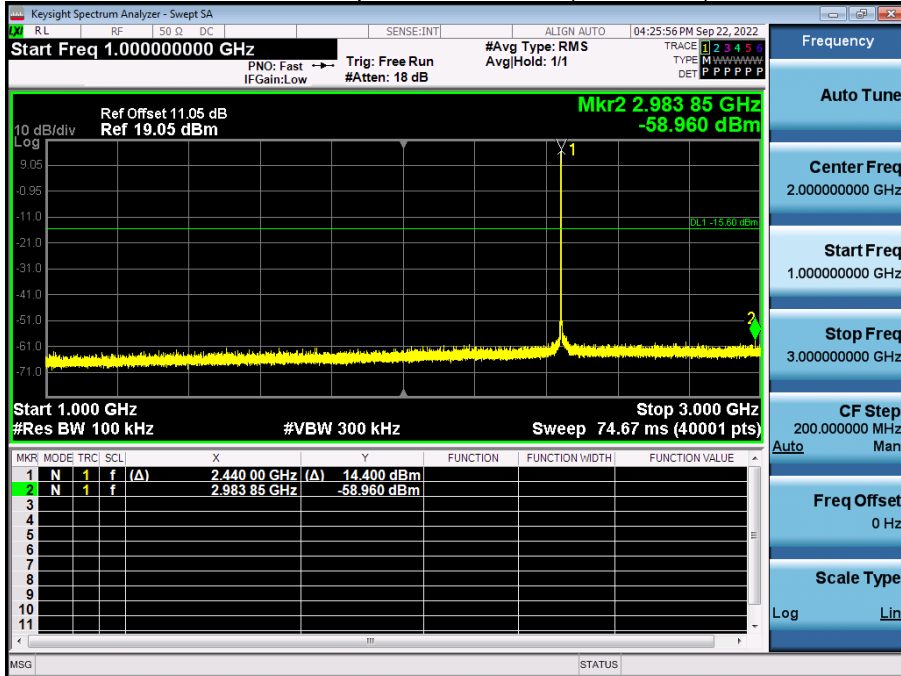


3 GHz ~ 5 GHz

Conducted Spurious Emission (Mid-CH 19)

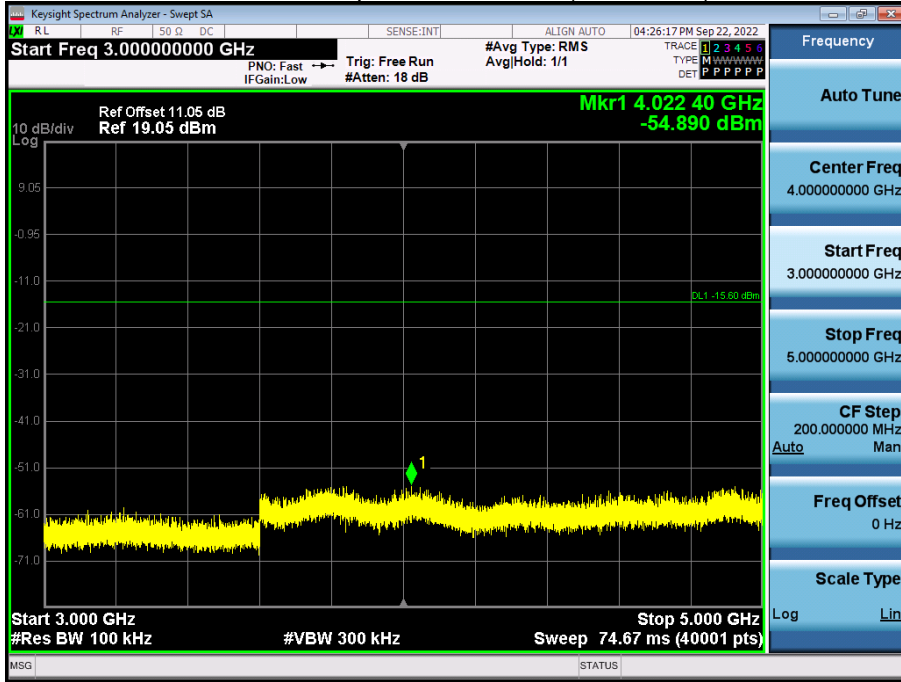


5 GHz ~ 7 GHz

Conducted Spurious Emission (Mid-CH 19)

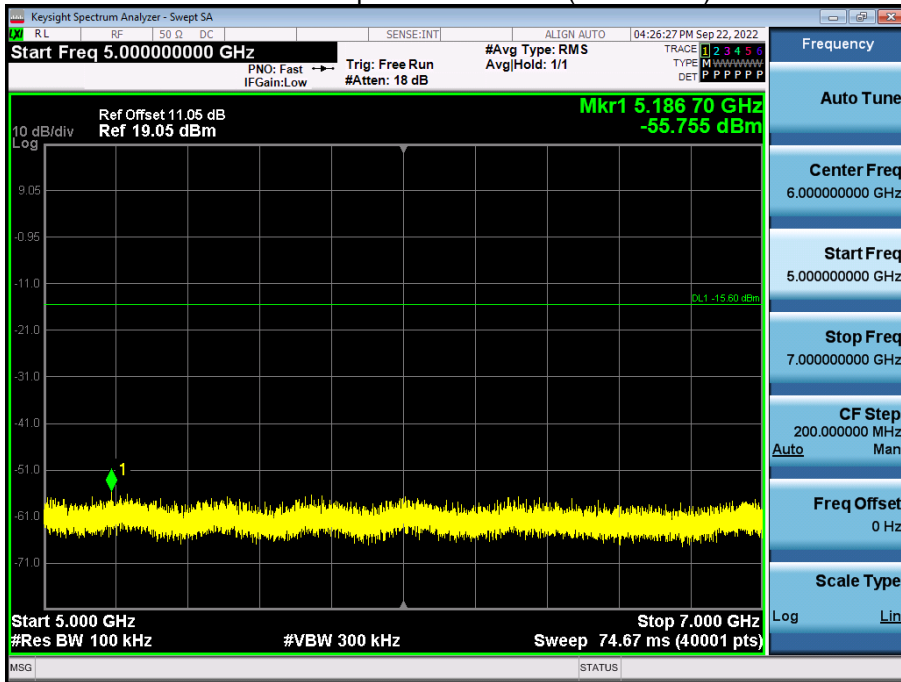


7 GHz ~ 9 GHz

Conducted Spurious Emission (Mid-CH 19)

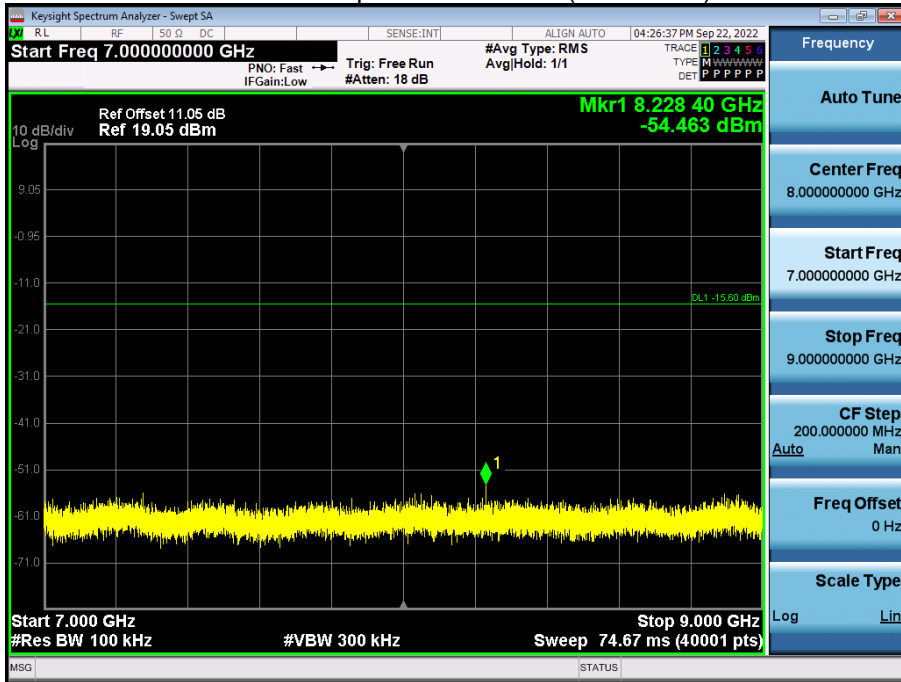


9 GHz ~ 11 GHz

Conducted Spurious Emission (Mid-CH 19)

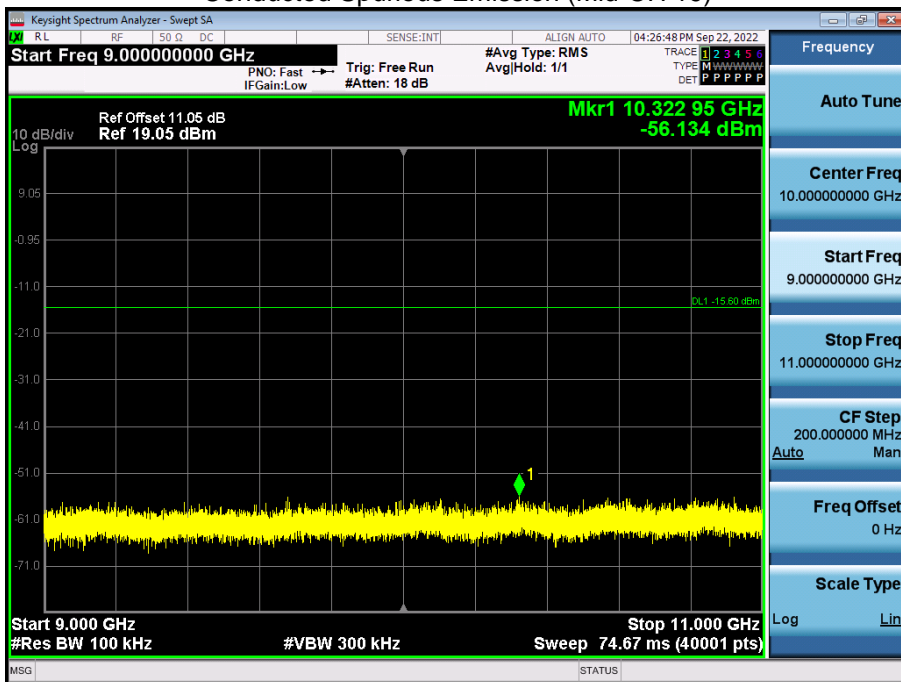


11 GHz ~ 13 GHz

Conducted Spurious Emission (Mid-CH 19)

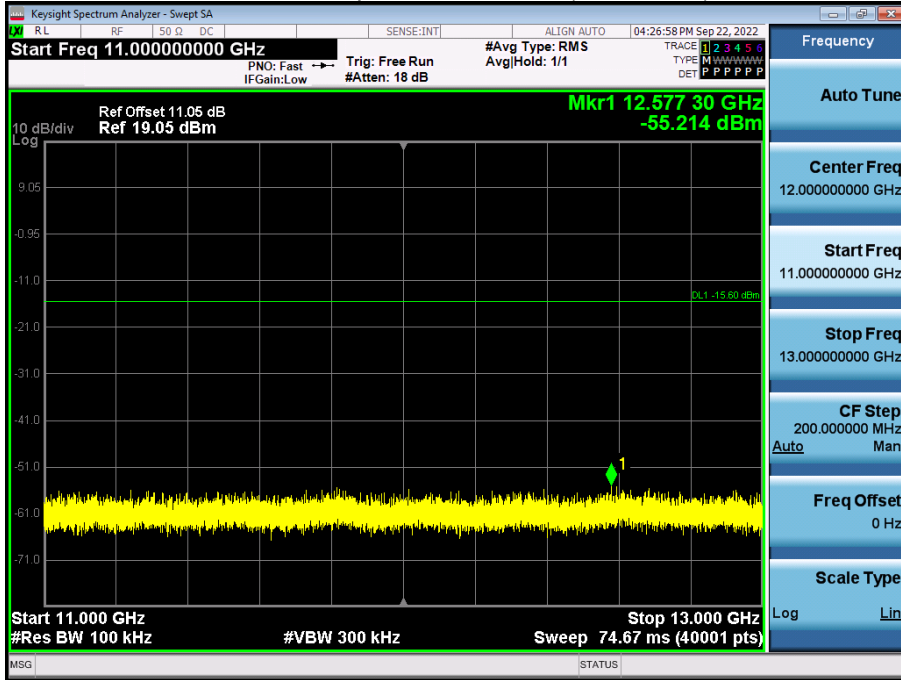


13 GHz ~ 15 GHz

Conducted Spurious Emission (Mid-CH 19)

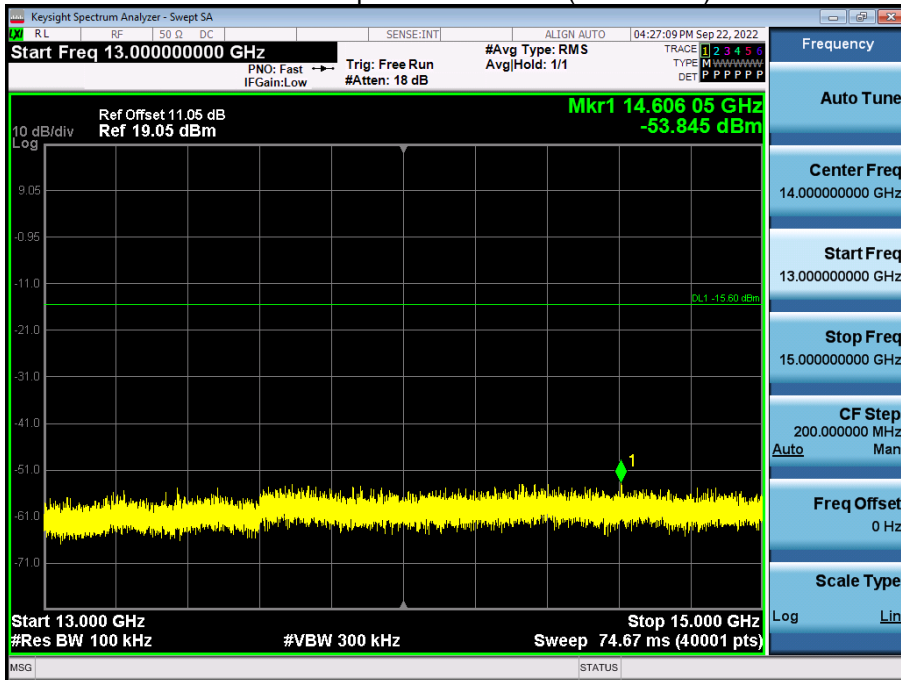


15 GHz ~ 17 GHz

Conducted Spurious Emission (Mid-CH 19)

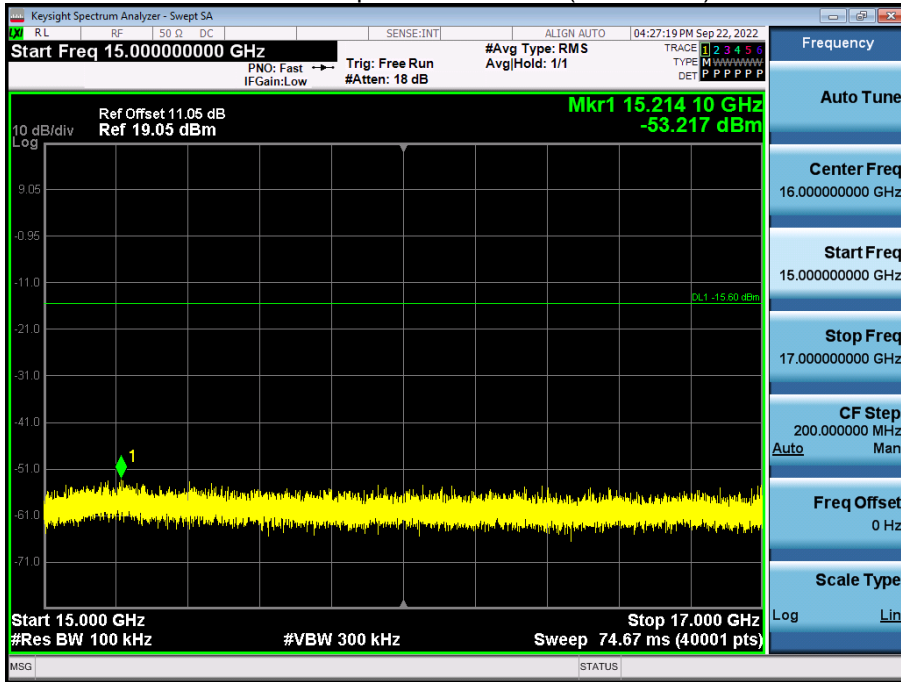


17 GHz ~ 19 GHz

Conducted Spurious Emission (Mid-CH 19)

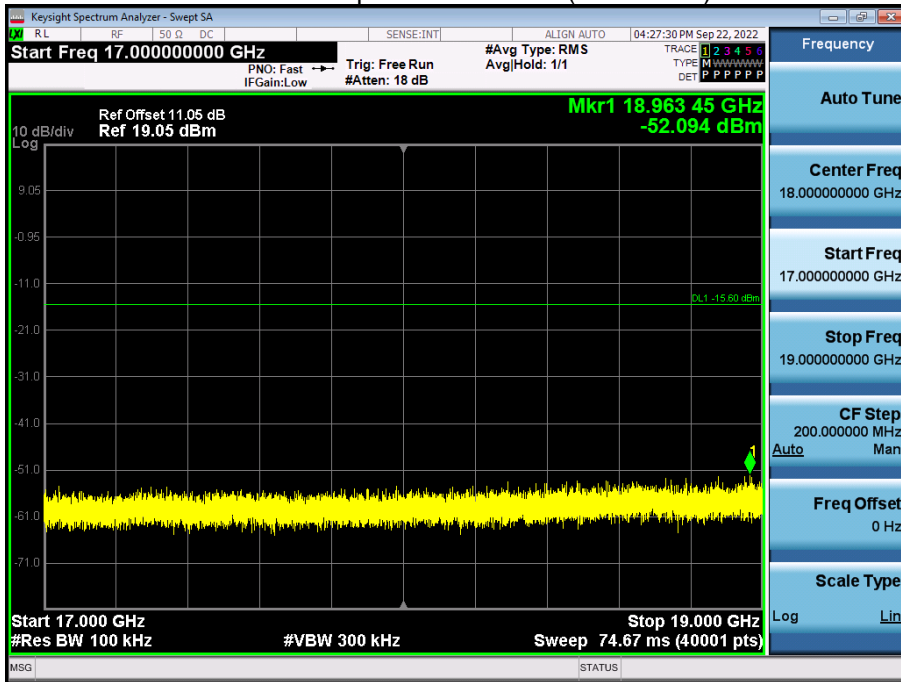


19 GHz ~ 21 GHz

Conducted Spurious Emission (Mid-CH 19)

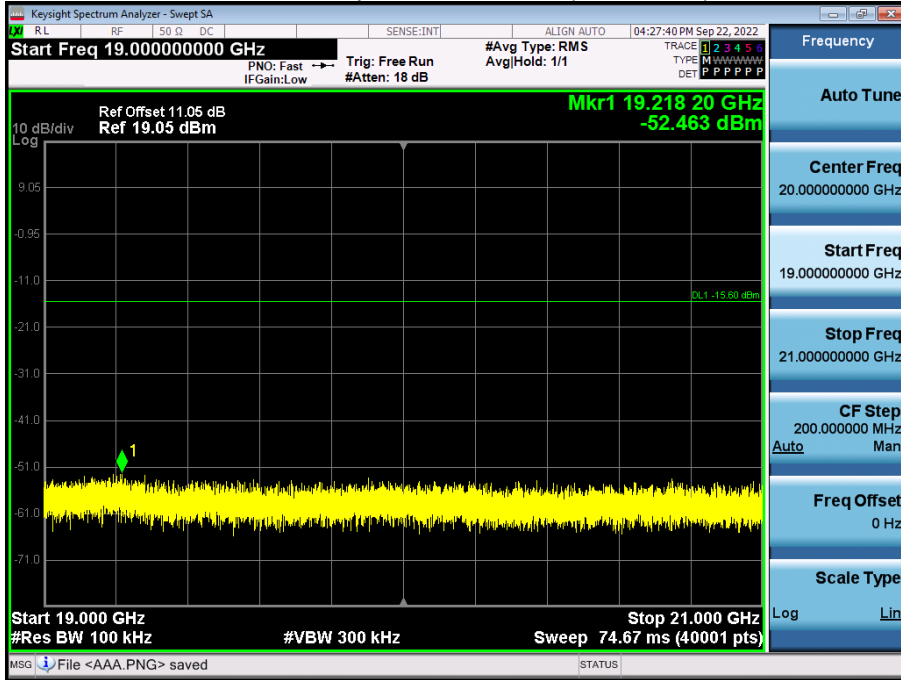


21 GHz ~ 23 GHz

Conducted Spurious Emission (Mid-CH 19)

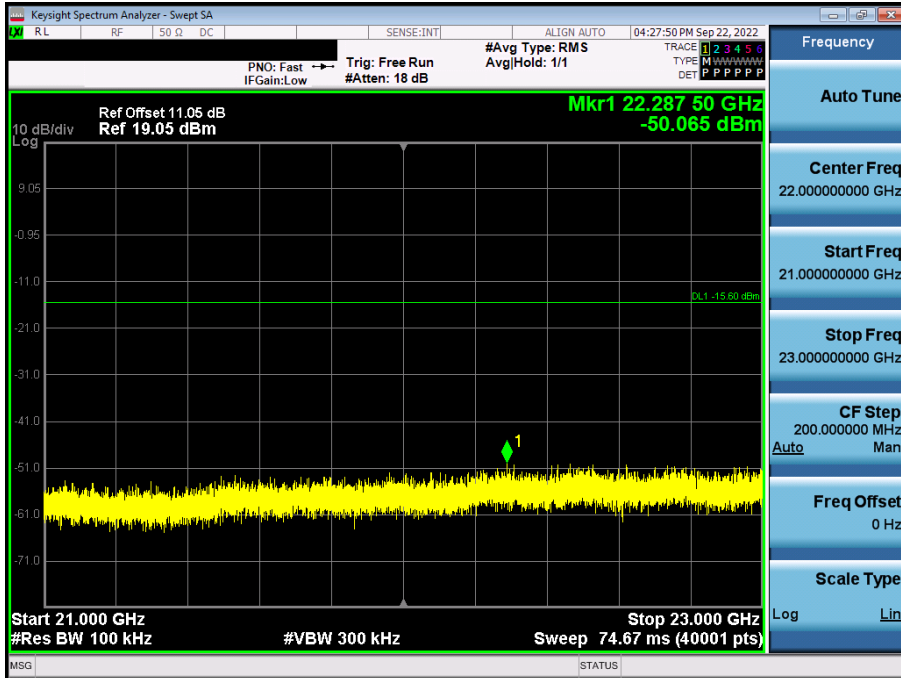

23 GHz ~ 25 GHz


Conducted Spurious Emission (Mid-CH 19)

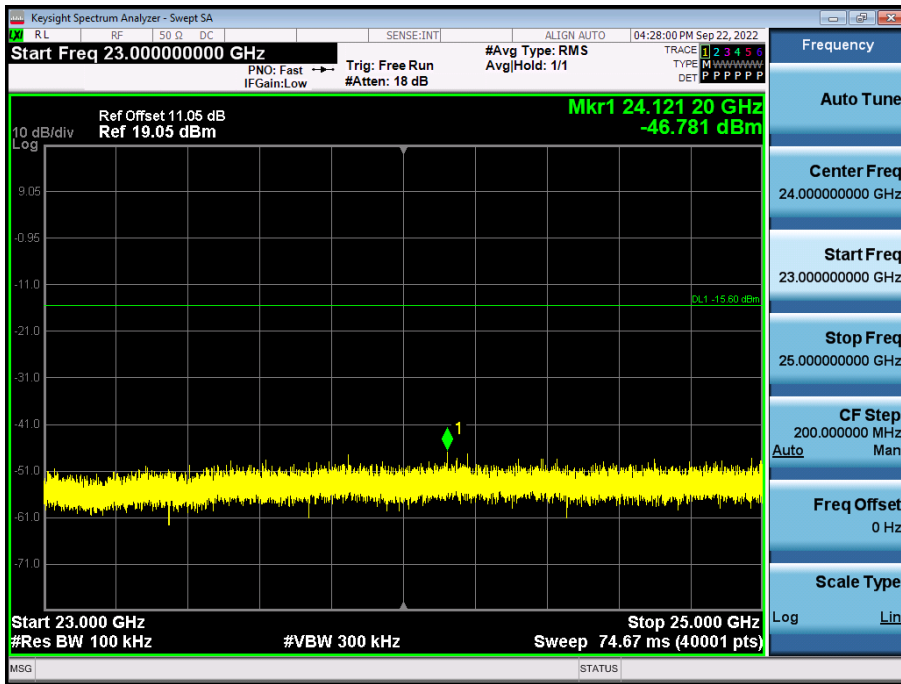

[Ant.2]


2M Bit/s (255 Byte) Test Plots –Band Edge

Low-CH 0

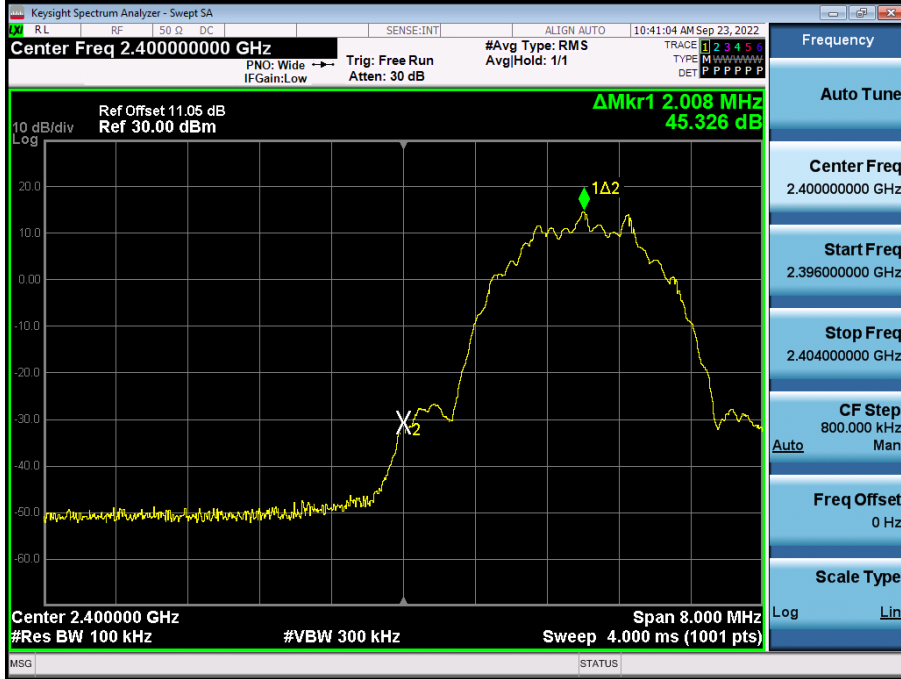

500k Bit/s (255 Byte) Test Plots –Band Edge

High-CH 39

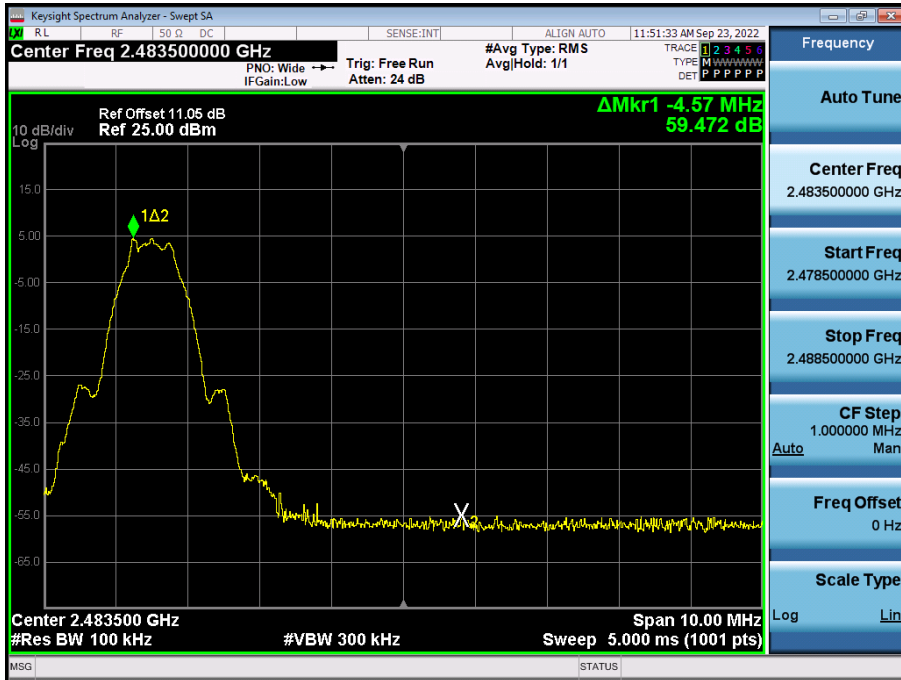




**1M Bit/s (37 Byte) Test Plots -Conducted Spurious Emission**


30 MHz ~ 1 GHz

Conducted Spurious Emission (Mid-CH 19)

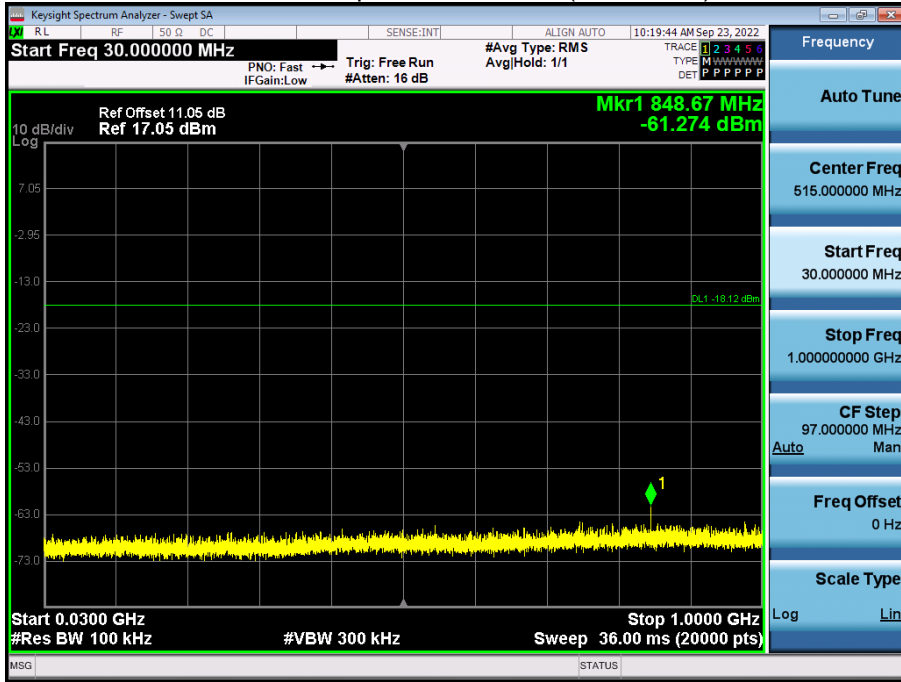


1 GHz ~ 3 GHz

Conducted Spurious Emission (Mid-CH 19)

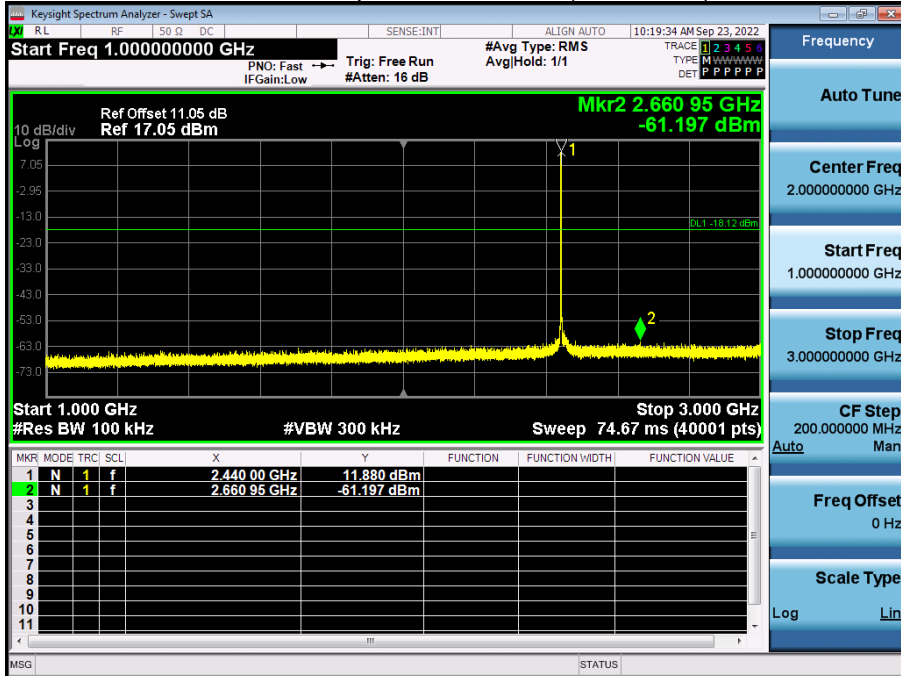


3 GHz ~ 5 GHz

Conducted Spurious Emission (Mid-CH 19)

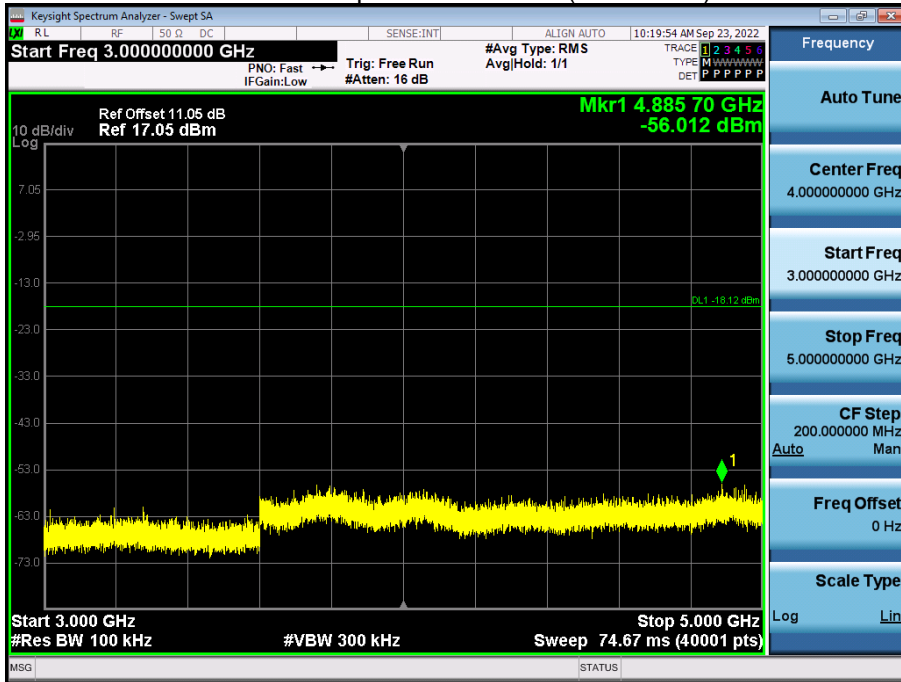


5 GHz ~ 7 GHz

Conducted Spurious Emission (Mid-CH 19)

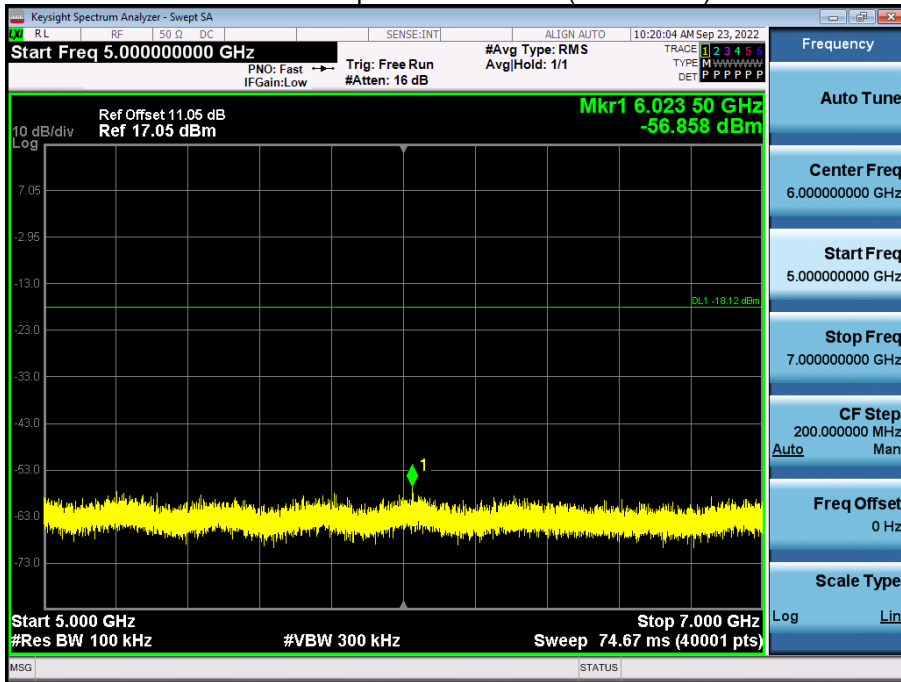


7 GHz ~ 9 GHz

Conducted Spurious Emission (Mid-CH 19)

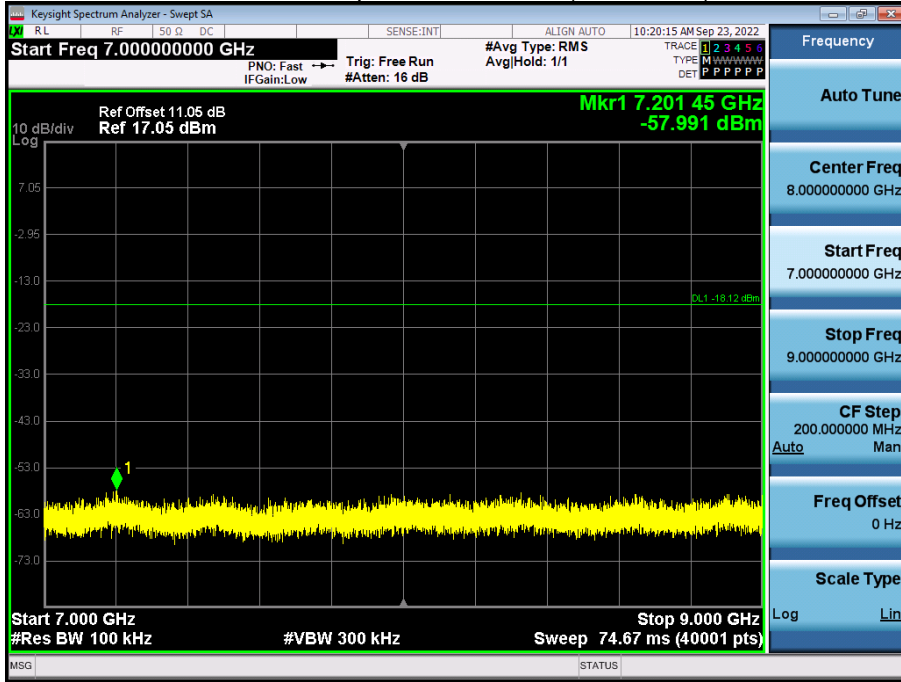


9 GHz ~ 11 GHz

Conducted Spurious Emission (Mid-CH 19)

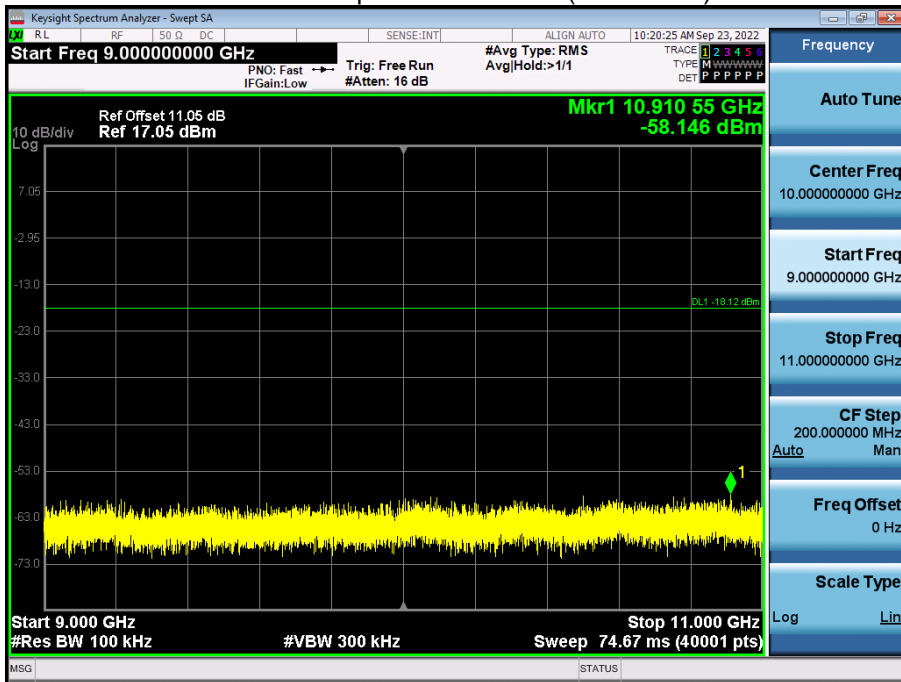


11 GHz ~ 13 GHz

Conducted Spurious Emission (Mid-CH 19)

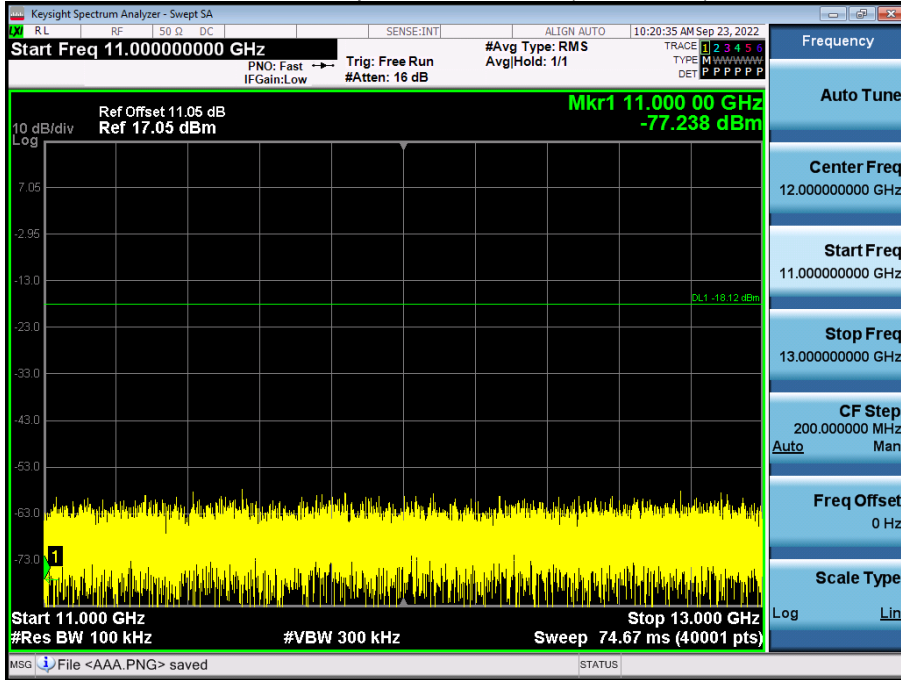


13 GHz ~ 15 GHz

Conducted Spurious Emission (Mid-CH 19)

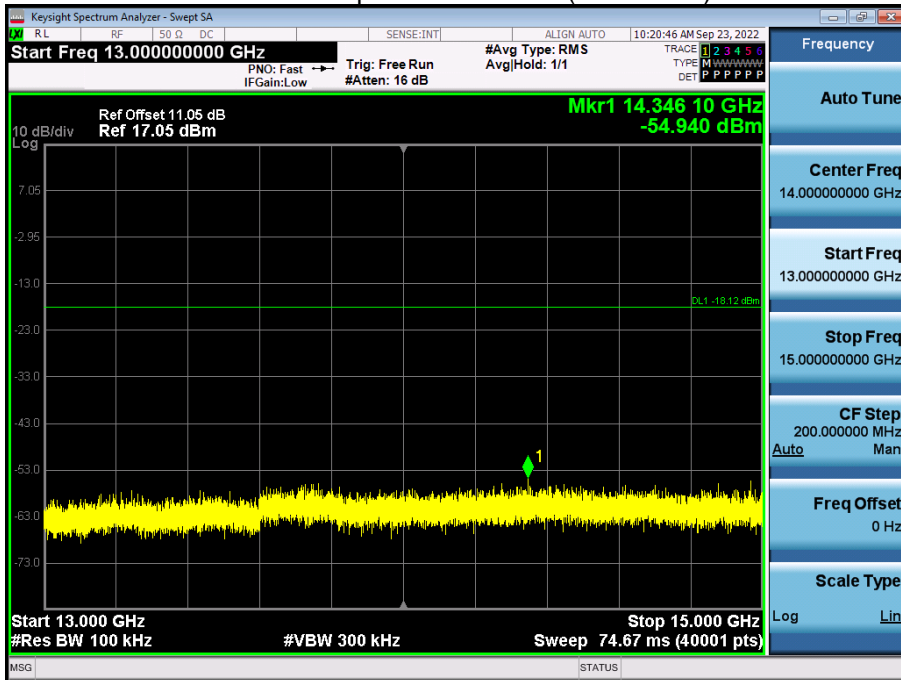


15 GHz ~ 17 GHz

Conducted Spurious Emission (Mid-CH 19)

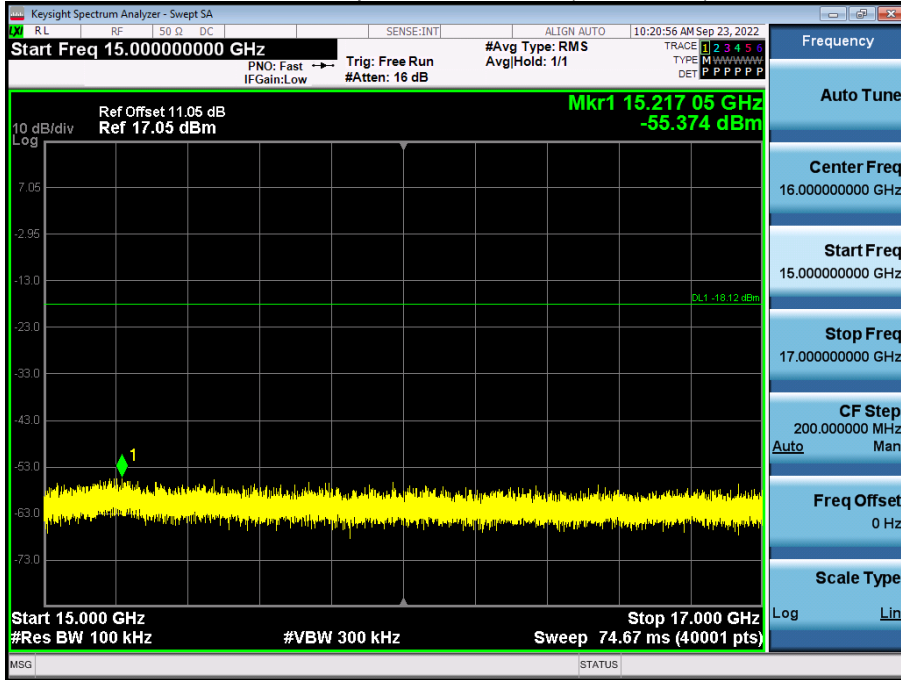


17 GHz ~ 19 GHz

Conducted Spurious Emission (Mid-CH 19)

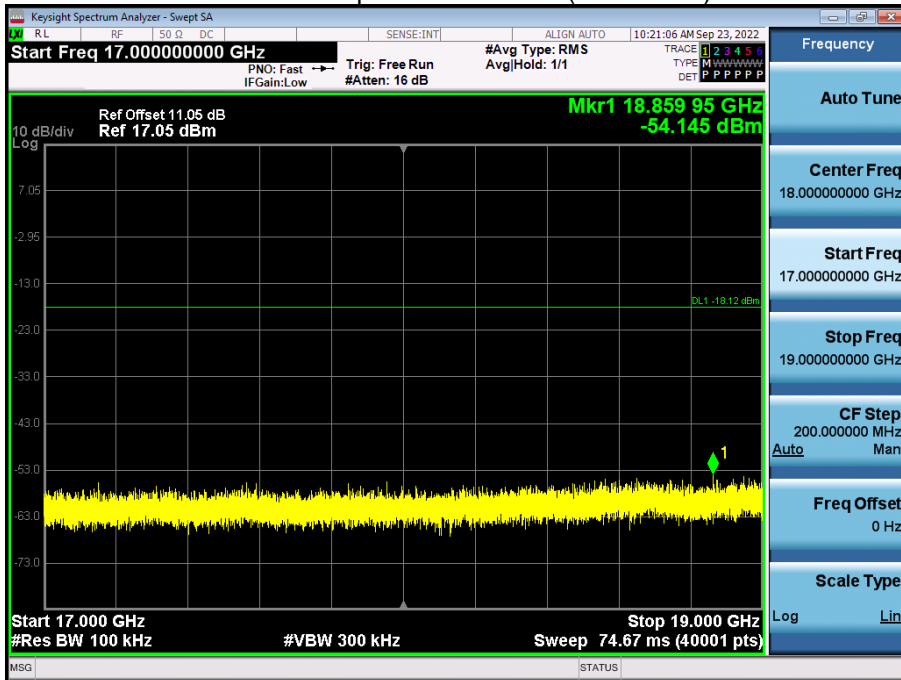


19 GHz ~ 21 GHz

Conducted Spurious Emission (Mid-CH 19)

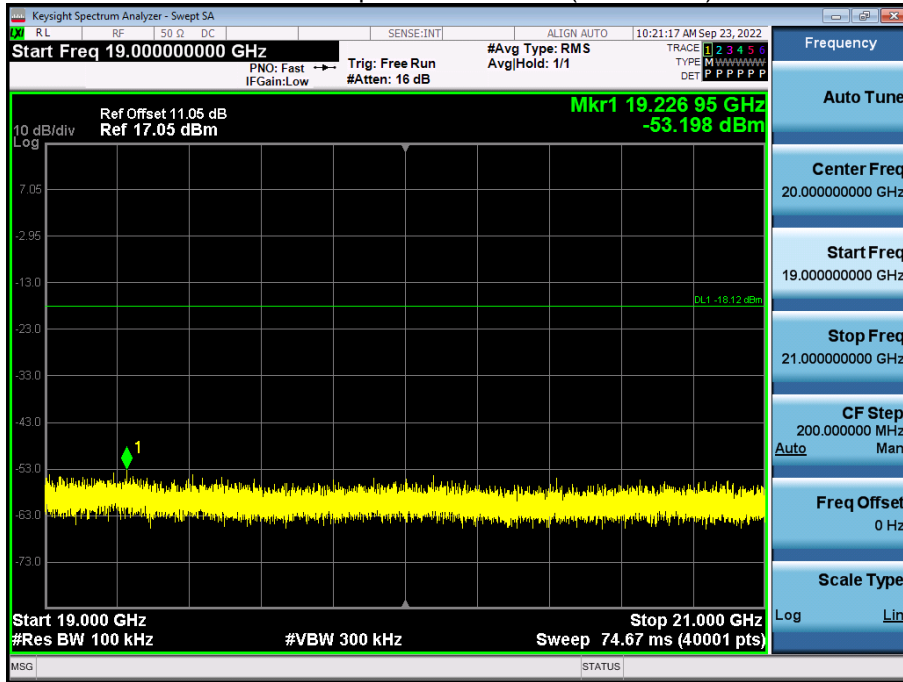


21 GHz ~ 23 GHz

Conducted Spurious Emission (Mid-CH 19)

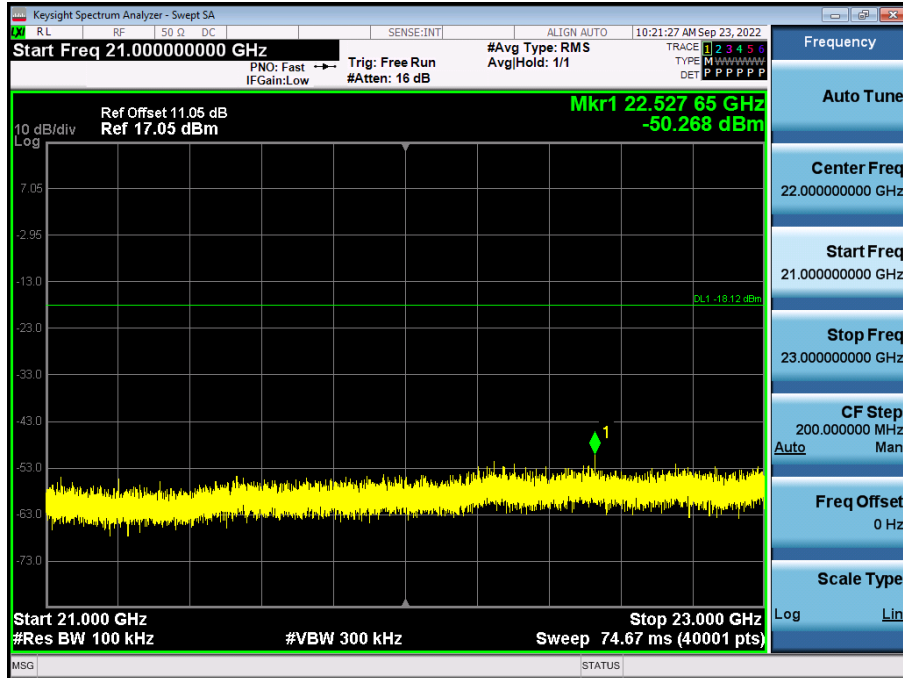

23 GHz ~ 25 GHz

Conducted Spurious Emission (Mid-CH 19)

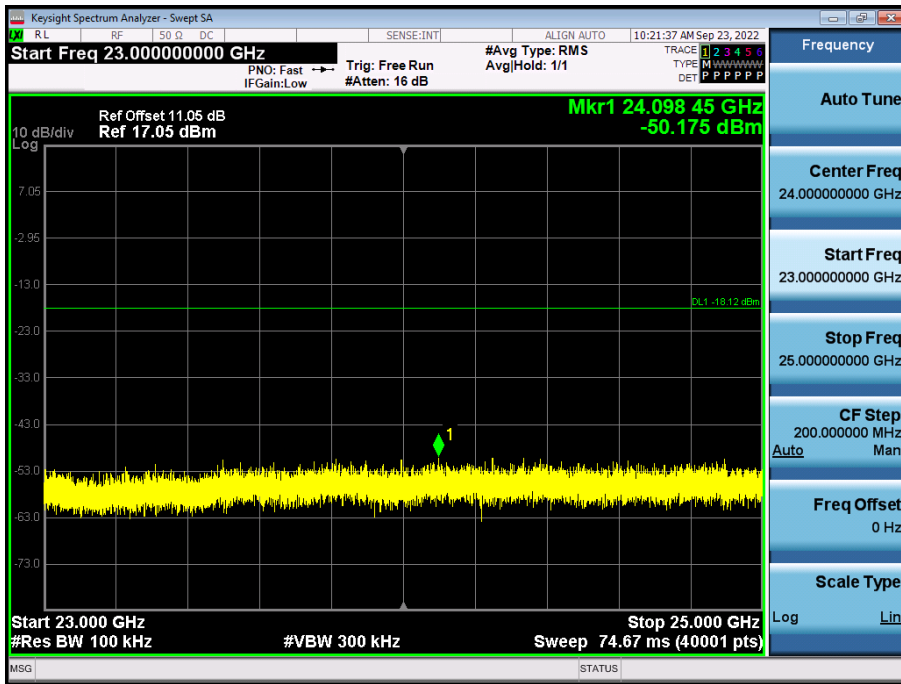

**9.6 RADIATED SPURIOUS EMISSIONS**

**Frequency Range : 9 kHz – 30 MHz**

| Frequency               | Measured Value | A.F+C.L+D.F | POL   | Total    | Limit    | Margin |
|-------------------------|----------------|-------------|-------|----------|----------|--------|
| [MHz]                   | [dBµV]         | [dB/m]      | [H/V] | [dBµV/m] | [dBµV/m] | [dB]   |
| No Critical peaks found |                |             |       |          |          |        |

**Note:**

1. The Measured of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor =  $40\log(\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dBµV) + Distance extrapolation factor

**Frequency Range : Below 1 GHz**

| Frequency               | Measured Value | A.F+C.L | POL   | Total    | Limit    | Margin |
|-------------------------|----------------|---------|-------|----------|----------|--------|
| [MHz]                   | [dBµV]         | [dB/m]  | [H/V] | [dBµV/m] | [dBµV/m] | [dB]   |
| No Critical peaks found |                |         |       |          |          |        |

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.



**Frequency Range : Above 1 GHz**
**[Ant.1]**
**Mode : 1 M Bit/s (37 Bytes)**

Operation Mode: CH Low

| Frequency<br>[MHz] | Measured Value<br>[dBμV] | Duty Cycle Factor<br>[dB] | A.F + C.L - A.G + D.F<br>[dB/m] | Pol.<br>[H/V] | Total<br>[dBμV/m] | Limit<br>[dBμV/m] | Margin<br>[dB] | Measurement Type |
|--------------------|--------------------------|---------------------------|---------------------------------|---------------|-------------------|-------------------|----------------|------------------|
| 4804               | 43.33                    | 0.00                      | 2.56                            | V             | 45.89             | 73.98             | 28.09          | PK               |
| 4804               | 31.28                    | 2.89                      | 2.56                            | V             | 36.73             | 53.98             | 17.25          | AV               |
| 7206               | 40.17                    | 0.00                      | 8.81                            | V             | 48.98             | 73.98             | 25.00          | PK               |
| 7206               | 27.93                    | 2.89                      | 8.81                            | V             | 39.63             | 53.98             | 14.35          | AV               |
| 4804               | 43.85                    | 0.00                      | 2.56                            | H             | 46.41             | 73.98             | 27.57          | PK               |
| 4804               | 31.71                    | 2.89                      | 2.56                            | H             | 37.16             | 53.98             | 16.82          | AV               |
| 7206               | 40.28                    | 0.00                      | 8.81                            | H             | 49.09             | 73.98             | 24.89          | PK               |
| 7206               | 28.00                    | 2.89                      | 8.81                            | H             | 39.70             | 53.98             | 14.28          | AV               |

Operation Mode: CH Mid

| Frequency<br>[MHz] | Measured Value<br>[dBμV] | Duty Cycle Factor<br>[dB] | A.F + C.L - A.G + D.F<br>[dB/m] | Pol.<br>[H/V] | Total<br>[dBμV/m] | Limit<br>[dBμV/m] | Margin<br>[dB] | Measurement Type |
|--------------------|--------------------------|---------------------------|---------------------------------|---------------|-------------------|-------------------|----------------|------------------|
| 4880               | 42.39                    | 0.00                      | 2.72                            | V             | 45.11             | 73.98             | 28.87          | PK               |
| 4880               | 30.02                    | 2.89                      | 2.72                            | V             | 35.63             | 53.98             | 18.35          | AV               |
| 7320               | 40.60                    | 0.00                      | 9.10                            | V             | 49.70             | 73.98             | 24.28          | PK               |
| 7320               | 28.19                    | 2.89                      | 9.10                            | V             | 40.18             | 53.98             | 13.80          | AV               |
| 4880               | 42.88                    | 0.00                      | 2.72                            | H             | 45.60             | 73.98             | 28.38          | PK               |
| 4880               | 30.14                    | 2.89                      | 2.72                            | H             | 35.75             | 53.98             | 18.23          | AV               |
| 7320               | 40.71                    | 0.00                      | 9.10                            | H             | 49.81             | 73.98             | 24.17          | PK               |
| 7320               | 28.33                    | 2.89                      | 9.10                            | H             | 40.32             | 53.98             | 13.66          | AV               |

Operation Mode: CH High

| Frequency<br>[MHz] | Measured Value<br>[dBμV] | Duty Cycle Factor<br>[dB] | A.F + C.L - A.G + D.F<br>[dB/m] | Pol.<br>[H/V] | Total<br>[dBμV/m] | Limit<br>[dBμV/m] | Margin<br>[dB] | Measurement Type |
|--------------------|--------------------------|---------------------------|---------------------------------|---------------|-------------------|-------------------|----------------|------------------|
| 4960               | 41.27                    | 0.00                      | 2.31                            | V             | 43.58             | 73.98             | 30.40          | PK               |
| 4960               | 26.48                    | 2.89                      | 2.31                            | V             | 31.68             | 53.98             | 22.30          | AV               |
| 7440               | 39.37                    | 0.00                      | 10.21                           | V             | 49.58             | 73.98             | 24.40          | PK               |
| 7440               | 27.51                    | 2.89                      | 10.21                           | V             | 40.61             | 53.98             | 13.37          | AV               |
| 4960               | 42.03                    | 0.00                      | 2.31                            | H             | 44.34             | 73.98             | 29.64          | PK               |
| 4960               | 29.69                    | 2.89                      | 2.31                            | H             | 34.89             | 53.98             | 19.09          | AV               |
| 7440               | 39.85                    | 0.00                      | 10.21                           | H             | 50.06             | 73.98             | 23.92          | PK               |
| 7440               | 27.85                    | 2.89                      | 10.21                           | H             | 40.95             | 53.98             | 13.03          | AV               |

**Mode : 2 M Bit/s (37 Bytes)**

Operation Mode: CH Low

| Frequency<br>[MHz] | Measured<br>Value<br>[dBμV] | Duty Cycle<br>Factor<br>[dB] | A.F + C.L - A.G + D.F<br>[dB/m] | Pol.<br>[H/V] | Total<br>[dBμV/m] | Limit<br>[dBμV/m] | Margin<br>[dB] | Measurement<br>Type |
|--------------------|-----------------------------|------------------------------|---------------------------------|---------------|-------------------|-------------------|----------------|---------------------|
| 4804               | 43.12                       | 0.00                         | 2.56                            | V             | 45.68             | 73.98             | 28.30          | PK                  |
| 4804               | 31.25                       | 4.19                         | 2.56                            | V             | 38.00             | 53.98             | 15.98          | AV                  |
| 7206               | 40.19                       | 0.00                         | 8.81                            | V             | 49.00             | 73.98             | 24.98          | PK                  |
| 7206               | 27.51                       | 4.19                         | 8.81                            | V             | 40.51             | 53.98             | 13.47          | AV                  |
| 4804               | 43.64                       | 0.00                         | 2.56                            | H             | 46.20             | 73.98             | 27.78          | PK                  |
| 4804               | 31.60                       | 4.19                         | 2.56                            | H             | 38.35             | 53.98             | 15.63          | AV                  |
| 7206               | 40.32                       | 0.00                         | 8.81                            | H             | 49.13             | 73.98             | 24.85          | PK                  |
| 7206               | 27.98                       | 4.19                         | 8.81                            | H             | 40.98             | 53.98             | 13.00          | AV                  |

Operation Mode: CH Mid

| Frequency<br>[MHz] | Measured<br>Value<br>[dBμV] | Duty Cycle<br>Factor<br>[dB] | A.F + C.L - A.G + D.F<br>[dB/m] | Pol.<br>[H/V] | Total<br>[dBμV/m] | Limit<br>[dBμV/m] | Margin<br>[dB] | Measurement<br>Type |
|--------------------|-----------------------------|------------------------------|---------------------------------|---------------|-------------------|-------------------|----------------|---------------------|
| 4880               | 42.52                       | 0.00                         | 2.72                            | V             | 45.24             | 73.98             | 28.74          | PK                  |
| 4880               | 30.07                       | 4.19                         | 2.72                            | V             | 36.98             | 53.98             | 17.00          | AV                  |
| 7320               | 40.32                       | 0.00                         | 9.10                            | V             | 49.42             | 73.98             | 24.56          | PK                  |
| 7320               | 28.17                       | 4.19                         | 9.10                            | V             | 41.46             | 53.98             | 12.52          | AV                  |
| 4880               | 42.68                       | 0.00                         | 2.72                            | H             | 45.40             | 73.98             | 28.58          | PK                  |
| 4880               | 30.12                       | 4.19                         | 2.72                            | H             | 37.03             | 53.98             | 16.95          | AV                  |
| 7320               | 40.47                       | 0.00                         | 9.10                            | H             | 49.57             | 73.98             | 24.41          | PK                  |
| 7320               | 28.30                       | 4.19                         | 9.10                            | H             | 41.59             | 53.98             | 12.39          | AV                  |

Operation Mode: CH High

| Frequency<br>[MHz] | Measured Value<br>[dBμV] | Duty Cycle Factor<br>[dB] | A.F + C.L - A.G + D.F<br>[dB/m] | Pol.<br>[H/V] | Total<br>[dBμV/m] | Limit<br>[dBμV/m] | Margin<br>[dB] | Measurement Type |
|--------------------|--------------------------|---------------------------|---------------------------------|---------------|-------------------|-------------------|----------------|------------------|
| 4960               | 41.39                    | 0.00                      | 2.31                            | V             | 43.70             | 73.98             | 30.28          | PK               |
| 4960               | 29.48                    | 4.19                      | 2.31                            | V             | 35.98             | 53.98             | 18.00          | AV               |
| 7440               | 40.07                    | 0.00                      | 10.21                           | V             | 50.28             | 73.98             | 23.70          | PK               |
| 7440               | 27.62                    | 4.19                      | 10.21                           | V             | 42.02             | 53.98             | 11.96          | AV               |
| 4960               | 41.82                    | 0.00                      | 2.31                            | H             | 44.13             | 73.98             | 29.85          | PK               |
| 4960               | 29.68                    | 4.19                      | 2.31                            | H             | 36.18             | 53.98             | 17.80          | AV               |
| 7440               | 40.18                    | 0.00                      | 10.21                           | H             | 50.39             | 73.98             | 23.59          | PK               |
| 7440               | 27.82                    | 4.19                      | 10.21                           | H             | 42.22             | 53.98             | 11.76          | AV               |

**[Ant.2]**

**Mode : 1 M Bit/s (37 Bytes)**

Operation Mode: CH Low

| Frequency<br>[MHz] | Measured Value<br>[dBμV] | Duty Cycle Factor<br>[dB] | A.F + C.L - A.G + D.F<br>[dB/m] | Pol.<br>[H/V] | Total<br>[dBμV/m] | Limit<br>[dBμV/m] | Margin<br>[dB] | Measurement Type |
|--------------------|--------------------------|---------------------------|---------------------------------|---------------|-------------------|-------------------|----------------|------------------|
| 4804               | 43.99                    | 0.00                      | 2.56                            | V             | 46.55             | 73.98             | 27.43          | PK               |
| 4804               | 31.42                    | 2.89                      | 2.56                            | V             | 36.87             | 53.98             | 17.11          | AV               |
| 7206               | 40.27                    | 0.00                      | 8.81                            | V             | 49.08             | 73.98             | 24.90          | PK               |
| 7206               | 28.00                    | 2.89                      | 8.81                            | V             | 39.70             | 53.98             | 14.28          | AV               |
| 4804               | 44.20                    | 0.00                      | 2.56                            | H             | 46.76             | 73.98             | 27.22          | PK               |
| 4804               | 31.88                    | 2.89                      | 2.56                            | H             | 37.33             | 53.98             | 16.65          | AV               |
| 7206               | 40.72                    | 0.00                      | 8.81                            | H             | 49.53             | 73.98             | 24.45          | PK               |
| 7206               | 28.09                    | 2.89                      | 8.81                            | H             | 39.79             | 53.98             | 14.19          | AV               |

Operation Mode: CH Mid

| Frequency<br>[MHz] | Measured Value<br>[dBμV] | Duty Cycle Factor<br>[dB] | A.F + C.L - A.G + D.F<br>[dB/m] | Pol.<br>[H/V] | Total<br>[dBμV/m] | Limit<br>[dBμV/m] | Margin<br>[dB] | Measurement Type |
|--------------------|--------------------------|---------------------------|---------------------------------|---------------|-------------------|-------------------|----------------|------------------|
| 4880               | 43.21                    | 0.00                      | 2.72                            | V             | 45.93             | 73.98             | 28.05          | PK               |
| 4880               | 30.42                    | 2.89                      | 2.72                            | V             | 36.03             | 53.98             | 17.95          | AV               |
| 7320               | 40.29                    | 0.00                      | 9.10                            | V             | 49.39             | 73.98             | 24.59          | PK               |
| 7320               | 28.19                    | 2.89                      | 9.10                            | V             | 40.18             | 53.98             | 13.80          | AV               |
| 4880               | 43.78                    | 0.00                      | 2.72                            | H             | 46.50             | 73.98             | 27.48          | PK               |
| 4880               | 30.69                    | 2.89                      | 2.72                            | H             | 36.30             | 53.98             | 17.68          | AV               |
| 7320               | 40.57                    | 0.00                      | 9.10                            | H             | 49.67             | 73.98             | 24.31          | PK               |
| 7320               | 28.31                    | 2.89                      | 9.10                            | H             | 40.30             | 53.98             | 13.68          | AV               |

Operation Mode: CH High

| Frequency<br>[MHz] | Measured Value<br>[dBμV] | Duty Cycle Factor<br>[dB] | A.F + C.L - A.G + D.F<br>[dB/m] | Pol.<br>[H/V] | Total<br>[dBμV/m] | Limit<br>[dBμV/m] | Margin<br>[dB] | Measurement Type |
|--------------------|--------------------------|---------------------------|---------------------------------|---------------|-------------------|-------------------|----------------|------------------|
| 4960               | 42.31                    | 0.00                      | 2.31                            | V             | 44.62             | 73.98             | 29.36          | PK               |
| 4960               | 29.79                    | 2.89                      | 2.31                            | V             | 34.99             | 53.98             | 18.99          | AV               |
| 7440               | 40.60                    | 0.00                      | 10.21                           | V             | 50.81             | 73.98             | 23.17          | PK               |
| 7440               | 27.57                    | 2.89                      | 10.21                           | V             | 40.67             | 53.98             | 13.31          | AV               |
| 4960               | 42.27                    | 0.00                      | 2.31                            | H             | 44.58             | 73.98             | 29.40          | PK               |
| 4960               | 29.87                    | 2.89                      | 2.31                            | H             | 35.07             | 53.98             | 18.91          | AV               |
| 7440               | 40.69                    | 0.00                      | 10.21                           | H             | 50.90             | 73.98             | 23.08          | PK               |
| 7440               | 27.81                    | 2.89                      | 10.21                           | H             | 40.91             | 53.98             | 13.07          | AV               |

**Mode : 2 M Bit/s (37 Bytes)**

Operation Mode: CH Low

| Frequency<br>[MHz] | Measured<br>Value<br>[dB $\mu$ V] | Duty Cycle<br>Factor<br>[dB] | A.F + C.L - A.G + D.F<br>[dB/m] | Pol.<br>[H/V] | Total<br>[dB $\mu$ V/m] | Limit<br>[dB $\mu$ V/m] | Margin<br>[dB] | Measurement<br>Type |
|--------------------|-----------------------------------|------------------------------|---------------------------------|---------------|-------------------------|-------------------------|----------------|---------------------|
| 4804               | 43.99                             | 0.00                         | 2.56                            | V             | 46.55                   | 73.98                   | 27.43          | PK                  |
| 4804               | 31.21                             | 4.19                         | 2.56                            | V             | 37.96                   | 53.98                   | 16.02          | AV                  |
| 7206               | 40.57                             | 0.00                         | 8.81                            | V             | 49.38                   | 73.98                   | 24.60          | PK                  |
| 7206               | 28.07                             | 4.19                         | 8.81                            | V             | 41.07                   | 53.98                   | 12.91          | AV                  |
| 4804               | 44.12                             | 0.00                         | 2.56                            | H             | 46.68                   | 73.98                   | 27.30          | PK                  |
| 4804               | 31.82                             | 4.19                         | 2.56                            | H             | 38.57                   | 53.98                   | 15.41          | AV                  |
| 7206               | 40.62                             | 0.00                         | 8.81                            | H             | 49.43                   | 73.98                   | 24.55          | PK                  |
| 7206               | 28.11                             | 4.19                         | 8.81                            | H             | 41.11                   | 53.98                   | 12.87          | AV                  |

Operation Mode: CH Mid

| Frequency<br>[MHz] | Measured<br>Value<br>[dB $\mu$ V] | Duty Cycle<br>Factor<br>[dB] | A.F + C.L - A.G + D.F<br>[dB/m] | Pol.<br>[H/V] | Total<br>[dB $\mu$ V/m] | Limit<br>[dB $\mu$ V/m] | Margin<br>[dB] | Measurement<br>Type |
|--------------------|-----------------------------------|------------------------------|---------------------------------|---------------|-------------------------|-------------------------|----------------|---------------------|
| 4880               | 42.82                             | 0.00                         | 2.72                            | V             | 45.54                   | 73.98                   | 28.44          | PK                  |
| 4880               | 29.99                             | 4.19                         | 2.72                            | V             | 36.90                   | 53.98                   | 17.08          | AV                  |
| 7320               | 40.27                             | 0.00                         | 9.10                            | V             | 49.37                   | 73.98                   | 24.61          | PK                  |
| 7320               | 28.18                             | 4.19                         | 9.10                            | V             | 41.47                   | 53.98                   | 12.51          | AV                  |
| 4880               | 43.21                             | 0.00                         | 2.72                            | H             | 45.93                   | 73.98                   | 28.05          | PK                  |
| 4880               | 30.70                             | 4.19                         | 2.72                            | H             | 37.61                   | 53.98                   | 16.37          | AV                  |
| 7320               | 40.41                             | 0.00                         | 9.10                            | H             | 49.51                   | 73.98                   | 24.47          | PK                  |
| 7320               | 28.30                             | 4.19                         | 9.10                            | H             | 41.59                   | 53.98                   | 12.39          | AV                  |

Operation Mode: CH High


| Frequency<br>[MHz] | Measured Value<br>[dBμV] | Duty Cycle Factor<br>[dB] | A.F + C.L - A.G + D.F<br>[dB/m] | Pol.<br>[H/V] | Total<br>[dBμV/m] | Limit<br>[dBμV/m] | Margin<br>[dB] | Measurement Type |
|--------------------|--------------------------|---------------------------|---------------------------------|---------------|-------------------|-------------------|----------------|------------------|
| 4960               | 42.11                    | 0.00                      | 2.31                            | V             | 44.42             | 73.98             | 29.56          | PK               |
| 4960               | 29.72                    | 4.19                      | 2.31                            | V             | 36.22             | 53.98             | 17.76          | AV               |
| 7440               | 39.97                    | 0.00                      | 10.21                           | V             | 50.18             | 73.98             | 23.80          | PK               |
| 7440               | 27.69                    | 4.19                      | 10.21                           | V             | 42.09             | 53.98             | 11.89          | AV               |
| 4960               | 42.14                    | 0.00                      | 2.31                            | H             | 44.45             | 73.98             | 29.53          | PK               |
| 4960               | 29.85                    | 4.19                      | 2.31                            | H             | 36.35             | 53.98             | 17.63          | AV               |
| 7440               | 40.17                    | 0.00                      | 10.21                           | H             | 50.38             | 73.98             | 23.60          | PK               |
| 7440               | 27.81                    | 4.19                      | 10.21                           | H             | 42.21             | 53.98             | 11.77          | AV               |



[Ant.1]


▣ 2 M Bit/s 37 Bytes Test Plots (Worst case : Y-H)

Radiated Spurious Emissions plot – Average Result (Ch.39 3rd Harmonic)

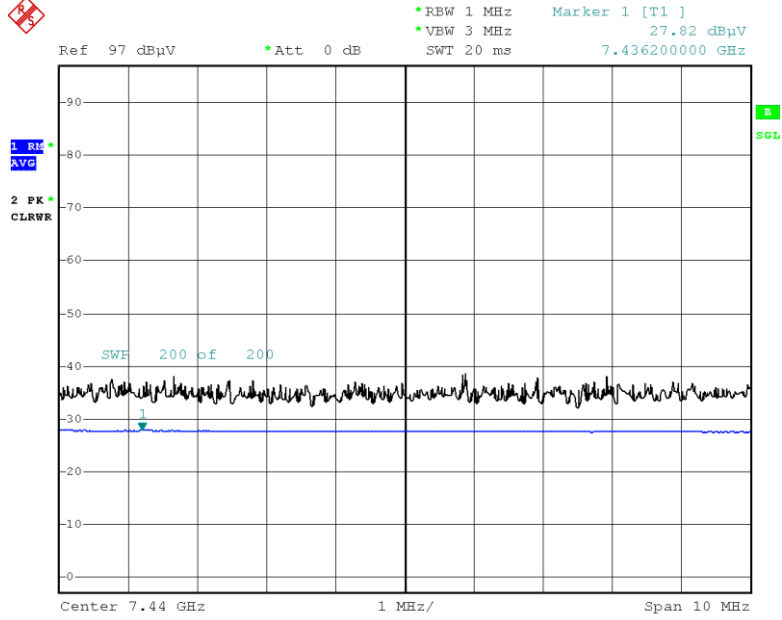

Date: 22.SEP.2022 20:52:26

Radiated Spurious Emissions plot – Peak Result (Ch.39 3rd Harmonic)

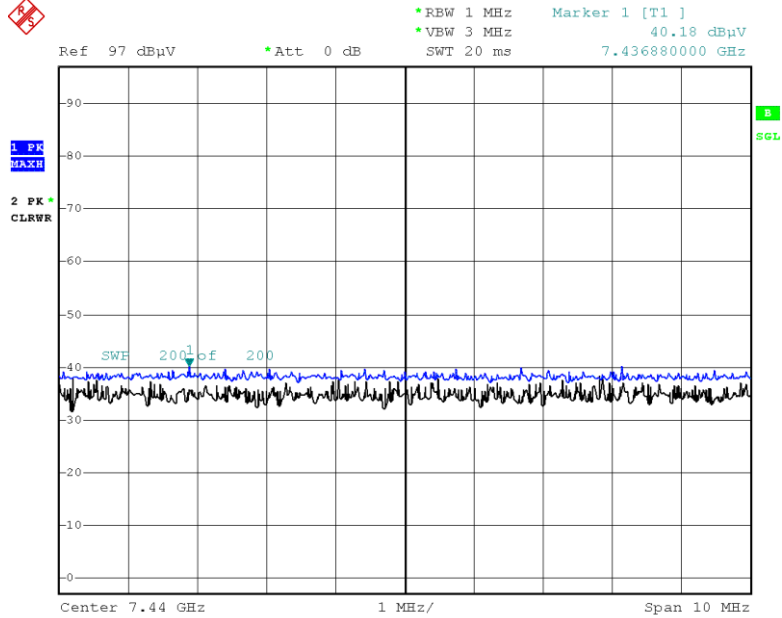


Date: 22.SEP.2022 20:52:39

[Ant.2]


▣ 2 M Bit/s 37 Bytes Test Plots (Worst case : Y-H)

Radiated Spurious Emissions plot – Average Result (Ch.39 3rd Harmonic)

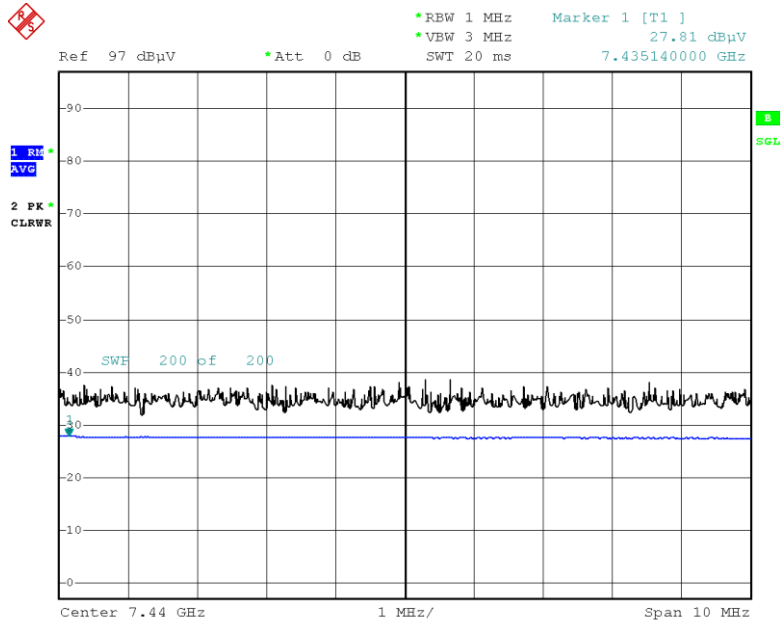

Date: 22.SEP.2022 21:24:47

Radiated Spurious Emissions plot – Peak Result (Ch.39 3rd Harmonic)

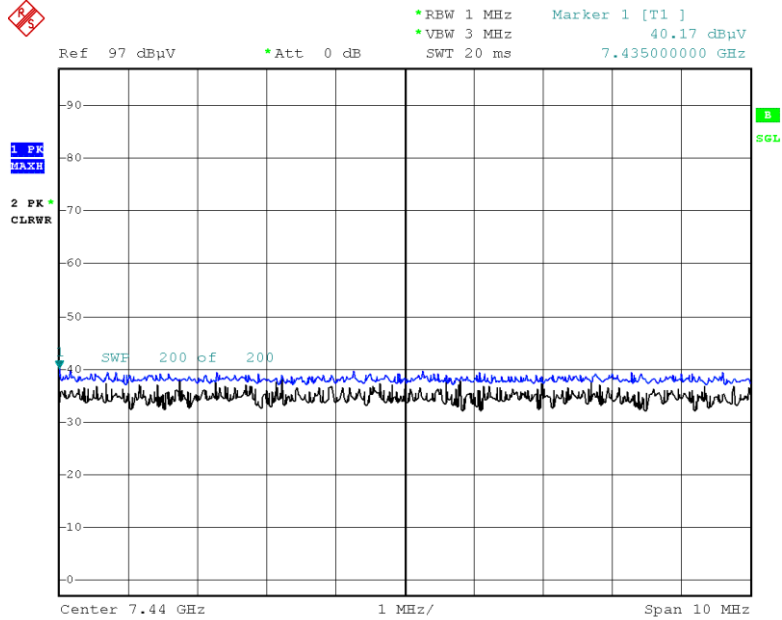

Date: 22.SEP.2022 21:24:58

**Note:**

Plot of worst case are only reported.

## 9.7 RADIATED RESTRICTED BAND EDGES

[Ant.1]

Mode : 1 M Bit/s (37 Bytes)

Operating Frequency 2402 MHz, 2480 MHz

Channel No. 0 CH, 39 CH

| Frequency<br>[MHz] | Measured Value<br>[dBμV] | Duty Cycle Factor<br>[dB] | AF+CL+DF<br>[dB/m] | Ant. Pol.<br>[H/V] | Total<br>[dBμV/m] | Limit<br>[dBμV/m] | Margin<br>[dB] | Measurement Type |
|--------------------|--------------------------|---------------------------|--------------------|--------------------|-------------------|-------------------|----------------|------------------|
| 2310-2390          | 20.63                    | 0.00                      | 35.43              | H                  | 56.05             | 73.98             | 17.93          | PK               |
| 2310-2390          | 8.60                     | 2.89                      | 35.43              | H                  | 46.92             | 53.98             | 7.06           | AV               |
| 2310-2390          | 20.19                    | 0.00                      | 35.43              | V                  | 55.62             | 73.98             | 18.36          | PK               |
| 2310-2390          | 8.46                     | 2.89                      | 35.43              | V                  | 46.77             | 53.98             | 7.21           | AV               |
| 2483.5-2500.0      | 22.97                    | 0.00                      | 35.57              | H                  | 58.53             | 73.98             | 15.45          | PK               |
| 2483.5-2500.0      | 9.47                     | 2.89                      | 35.57              | H                  | 47.93             | 53.98             | 6.05           | AV               |
| 2483.5-2500.0      | 22.34                    | 0.00                      | 35.57              | V                  | 57.91             | 73.98             | 16.07          | PK               |
| 2483.5-2500.0      | 9.32                     | 2.89                      | 35.57              | V                  | 47.78             | 53.98             | 6.20           | AV               |

Mode : 2 M Bit/s (37 Bytes)

Operating Frequency 2402 MHz, 2480 MHz

Channel No. 0 CH, 39 CH

| Frequency<br>[MHz] | Measured Value<br>[dBμV] | Duty Cycle Factor<br>[dB] | AF+CL+DF<br>[dB/m] | Ant. Pol.<br>[H/V] | Total<br>[dBμV/m] | Limit<br>[dBμV/m] | Margin<br>[dB] | Measurement Type |
|--------------------|--------------------------|---------------------------|--------------------|--------------------|-------------------|-------------------|----------------|------------------|
| 2310-2390          | 20.27                    | 0.00                      | 35.43              | H                  | 55.70             | 73.98             | 18.28          | PK               |
| 2310-2390          | 8.47                     | 4.19                      | 35.43              | H                  | 48.09             | 53.98             | 5.89           | AV               |
| 2310-2390          | 20.19                    | 0.00                      | 35.43              | V                  | 55.61             | 73.98             | 18.37          | PK               |
| 2310-2390          | 8.28                     | 4.19                      | 35.43              | V                  | 47.89             | 53.98             | 6.09           | AV               |
| 2483.5-2500.0      | 26.09                    | 0.00                      | 35.57              | H                  | 61.66             | 73.98             | 12.32          | PK               |
| 2483.5-2500.0      | 9.35                     | 4.19                      | 35.57              | H                  | 49.10             | 53.98             | 4.88           | AV               |
| 2483.5-2500.0      | 25.73                    | 0.00                      | 35.57              | V                  | 61.30             | 73.98             | 12.68          | PK               |
| 2483.5-2500.0      | 9.29                     | 4.19                      | 35.57              | V                  | 49.04             | 53.98             | 4.94           | AV               |

**[Ant.2]**
**Mode : 1 M Bit/s (37 Bytes)**

|                     |                    |
|---------------------|--------------------|
| Operating Frequency | 2402 MHz, 2480 MHz |
| Channel No.         | 0 CH, 39 CH        |

| Frequency<br>[MHz] | Measured Value<br>[dBμV] | Duty Cycle Factor<br>[dB] | AF+CL+DF<br>[dB/m] | Ant. Pol.<br>[H/V] | Total<br>[dBμV/m] | Limit<br>[dBμV/m] | Margin<br>[dB] | Measurement Type |
|--------------------|--------------------------|---------------------------|--------------------|--------------------|-------------------|-------------------|----------------|------------------|
| 2310-2390          | 20.15                    | 0.00                      | 35.43              | H                  | 55.58             | 73.98             | 18.40          | PK               |
| 2310-2390          | 8.52                     | 2.89                      | 35.43              | H                  | 46.84             | 53.98             | 7.14           | AV               |
| 2310-2390          | 20.03                    | 0.00                      | 35.43              | V                  | 55.45             | 73.98             | 18.53          | PK               |
| 2310-2390          | 8.43                     | 2.89                      | 35.43              | V                  | 46.74             | 53.98             | 7.24           | AV               |
| 2483.5-2500.0      | 20.58                    | 0.00                      | 35.57              | H                  | 56.15             | 73.98             | 17.83          | PK               |
| 2483.5-2500.0      | 8.75                     | 2.89                      | 35.57              | H                  | 47.21             | 53.98             | 6.77           | AV               |
| 2483.5-2500.0      | 20.16                    | 0.00                      | 35.57              | V                  | 55.72             | 73.98             | 18.26          | PK               |
| 2483.5-2500.0      | 8.72                     | 2.89                      | 35.57              | V                  | 47.17             | 53.98             | 6.81           | AV               |

**Mode : 2 M Bit/s (37 Bytes)**


|                     |                    |
|---------------------|--------------------|
| Operating Frequency | 2402 MHz, 2480 MHz |
| Channel No.         | 0 CH, 39 CH        |

| Frequency<br>[MHz] | Measured Value<br>[dBμV] | Duty Cycle Factor<br>[dB] | AF+CL+DF<br>[dB/m] | Ant. Pol.<br>[H/V] | Total<br>[dBμV/m] | Limit<br>[dBμV/m] | Margin<br>[dB] | Measurement Type |
|--------------------|--------------------------|---------------------------|--------------------|--------------------|-------------------|-------------------|----------------|------------------|
| 2310-2390          | 20.17                    | 0.00                      | 35.43              | H                  | 55.59             | 73.98             | 18.39          | PK               |
| 2310-2390          | 8.47                     | 4.19                      | 35.43              | H                  | 48.08             | 53.98             | 5.90           | AV               |
| 2310-2390          | 19.93                    | 0.00                      | 35.43              | V                  | 55.36             | 73.98             | 18.62          | PK               |
| 2310-2390          | 8.24                     | 4.19                      | 35.43              | V                  | 47.86             | 53.98             | 6.12           | AV               |
| 2483.5-2500.0      | 20.57                    | 0.00                      | 35.57              | H                  | 56.14             | 73.98             | 17.84          | PK               |
| 2483.5-2500.0      | 8.68                     | 4.19                      | 35.57              | H                  | 48.43             | 53.98             | 5.55           | AV               |
| 2483.5-2500.0      | 20.35                    | 0.00                      | 35.57              | V                  | 55.91             | 73.98             | 18.07          | PK               |
| 2483.5-2500.0      | 8.62                     | 4.19                      | 35.57              | V                  | 48.37             | 53.98             | 5.61           | AV               |


[Ant.1]

Mode : 2 M Bit/s (37 Bytes) Test Plots

Radiated Restricted Band Edges plot – Average Result (Ch.39, X-H)

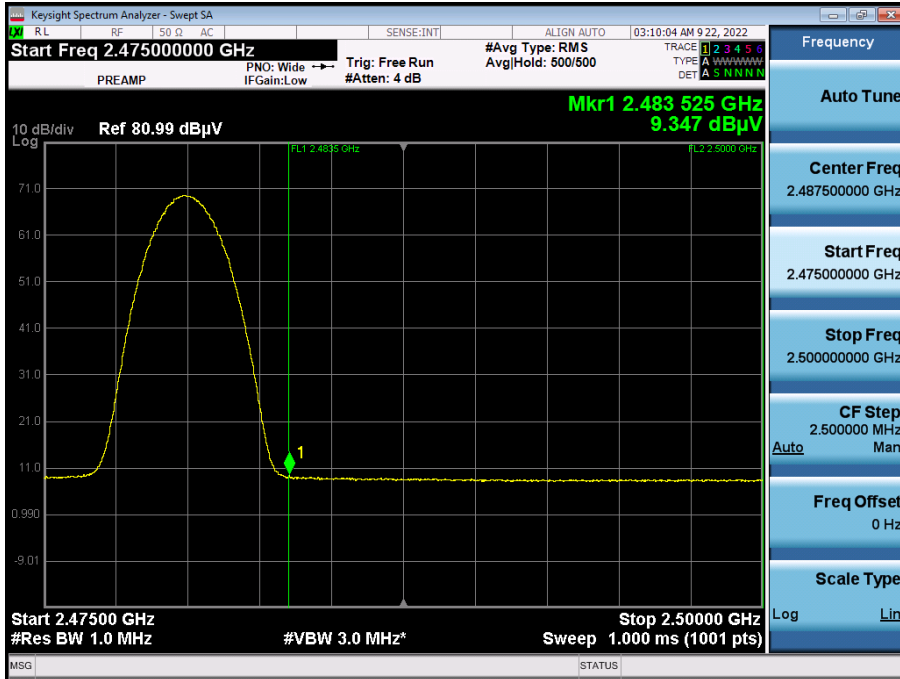


Radiated Restricted Band Edges plot – Peak Result (Ch.39, X-H)

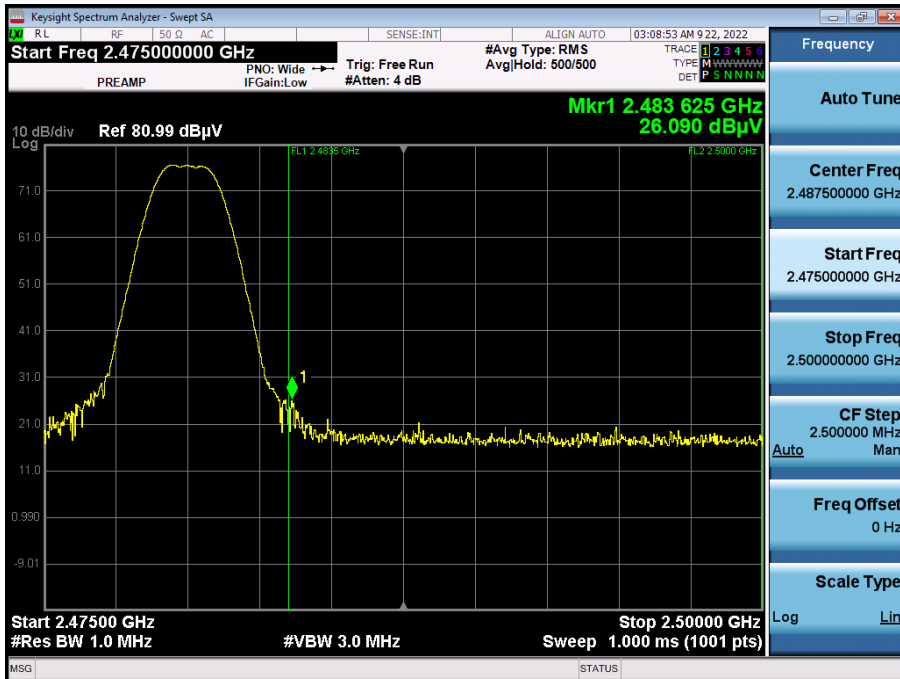


[Ant.2]

Mode : 2 M Bit/s (37 Bytes) Test Plots

Radiated Restricted Band Edges plot – Average Result (Ch.39, X-H)

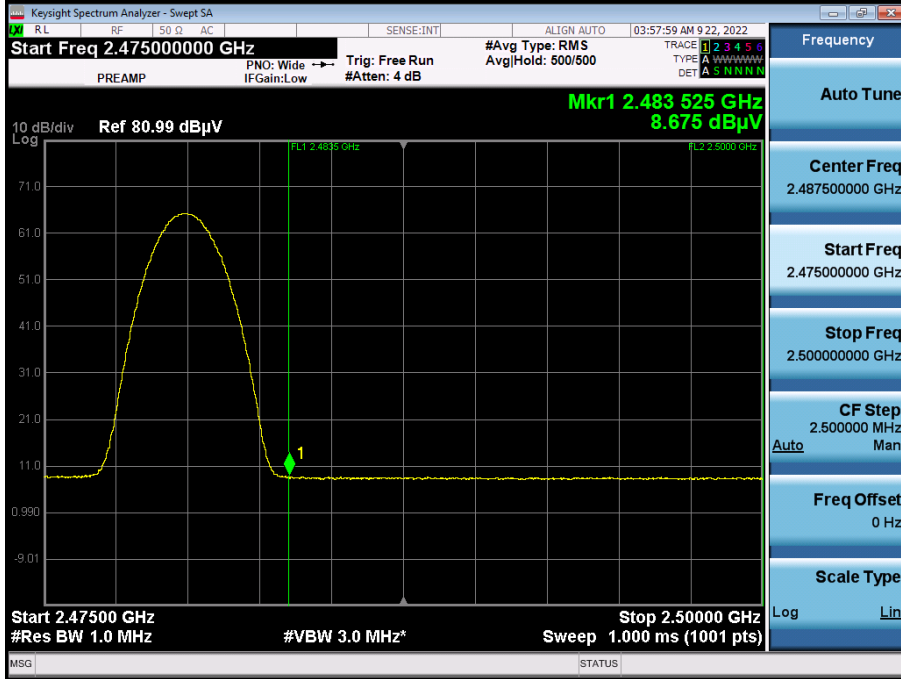

Radiated Restricted Band Edges plot – Peak Result (Ch.39, X-H)

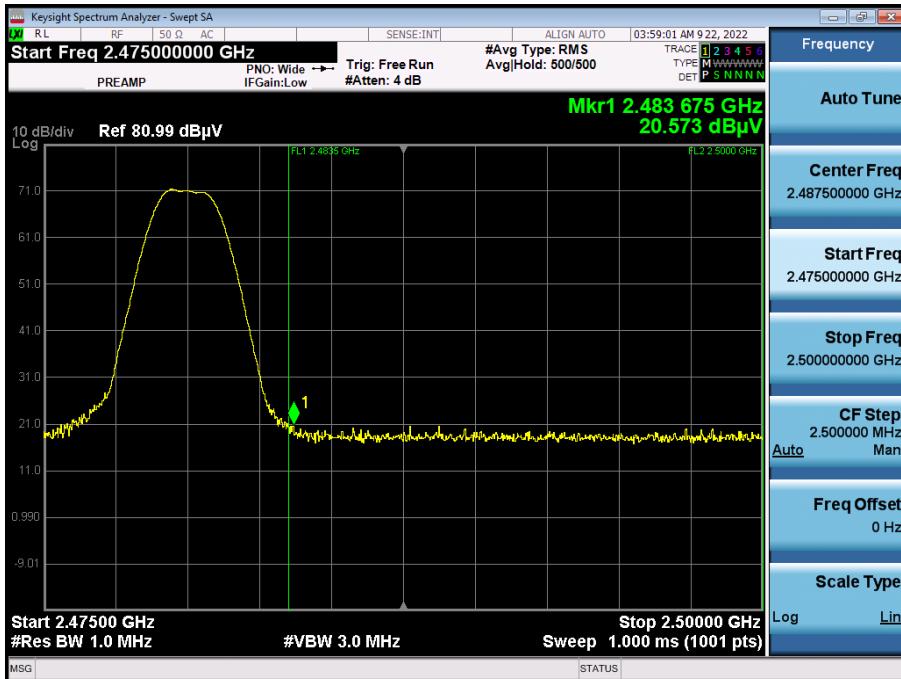

**Note:**

Plot of worst case are only reported.

**9.8 POWERLINE CONDUCTED EMISSIONS**

**Conducted Emissions (Line 1)**

BTLE MODE\_L1


1 / 2

**Test Report**

**Common Information**

EUT : SM-S911B/DS  
 Manufacturer : SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions : BTLE MODE\_L1

Full Spectrum

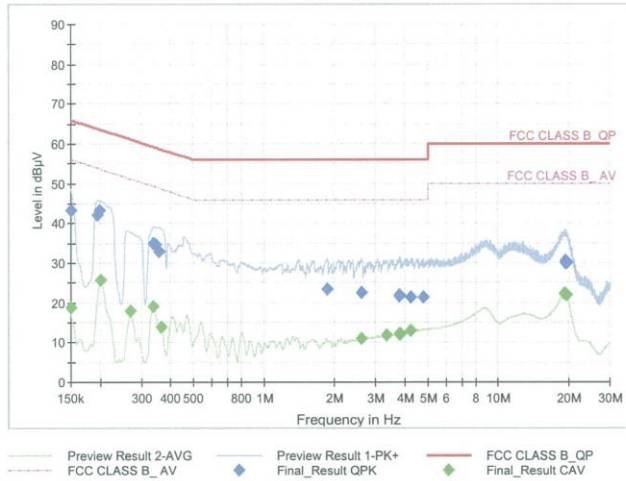

**Final Result QPK**

| Frequency (MHz) | QuasiPeak (dBµV) | Limit (dBµV) | Margin (dB) | Bandwidth (kHz) | Line | Filter | Corr. (dB) |
|-----------------|------------------|--------------|-------------|-----------------|------|--------|------------|
| 0.1500          | 43.39            | 66.00        | 22.61       | 9.000           | L1   | OFF    | 9.7        |
| 0.1950          | 42.14            | 63.82        | 21.68       | 9.000           | L1   | OFF    | 9.7        |
| 0.1995          | 43.36            | 63.63        | 20.27       | 9.000           | L1   | OFF    | 9.7        |
| 0.3390          | 34.90            | 59.23        | 24.33       | 9.000           | L1   | OFF    | 9.7        |
| 0.3458          | 34.67            | 59.06        | 24.39       | 9.000           | L1   | OFF    | 9.7        |
| 0.3548          | 32.86            | 58.85        | 25.99       | 9.000           | L1   | OFF    | 9.7        |
| 1.8658          | 23.34            | 56.00        | 32.66       | 9.000           | L1   | OFF    | 9.7        |
| 2.6105          | 22.59            | 56.00        | 33.41       | 9.000           | L1   | OFF    | 9.8        |
| 3.8008          | 21.91            | 56.00        | 34.09       | 9.000           | L1   | OFF    | 9.8        |
| 3.8075          | 21.65            | 56.00        | 34.35       | 9.000           | L1   | OFF    | 9.8        |
| 4.2530          | 21.42            | 56.00        | 34.58       | 9.000           | L1   | OFF    | 9.8        |
| 4.8043          | 21.29            | 56.00        | 34.71       | 9.000           | L1   | OFF    | 9.8        |
| 19.2380         | 30.33            | 60.00        | 29.67       | 9.000           | L1   | OFF    | 10.3       |
| 19.2583         | 30.13            | 60.00        | 29.87       | 9.000           | L1   | OFF    | 10.3       |
| 19.2673         | 30.21            | 60.00        | 29.79       | 9.000           | L1   | OFF    | 10.3       |
| 19.2740         | 30.47            | 60.00        | 29.53       | 9.000           | L1   | OFF    | 10.3       |
| 19.4810         | 30.09            | 60.00        | 29.91       | 9.000           | L1   | OFF    | 10.3       |
| 19.5058         | 30.04            | 60.00        | 29.96       | 9.000           | L1   | OFF    | 10.3       |

2022-09-28

오후 1:56:05

BTLE MODE\_L1

2 / 2

**Final Result CAV**

| Frequency (MHz) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Bandwidth (kHz) | Line | Filter | Corr. (dB) |
|-----------------|-----------------|--------------|-------------|-----------------|------|--------|------------|
| 0.1500          | 18.87           | 56.00        | 37.13       | 9.000           | L1   | OFF    | 9.7        |
| 0.2018          | 25.80           | 53.54        | 27.73       | 9.000           | L1   | OFF    | 9.7        |
| 0.2693          | 17.99           | 51.14        | 33.15       | 9.000           | L1   | OFF    | 9.7        |
| 0.3368          | 19.16           | 49.28        | 30.13       | 9.000           | L1   | OFF    | 9.7        |
| 0.3660          | 13.92           | 48.59        | 34.67       | 9.000           | L1   | OFF    | 9.7        |
| 2.6083          | 10.98           | 46.00        | 35.02       | 9.000           | L1   | OFF    | 9.8        |
| 2.6150          | 10.88           | 46.00        | 35.12       | 9.000           | L1   | OFF    | 9.8        |
| 3.3553          | 11.89           | 46.00        | 34.11       | 9.000           | L1   | OFF    | 9.8        |
| 3.7918          | 12.20           | 46.00        | 33.80       | 9.000           | L1   | OFF    | 9.8        |
| 3.8098          | 12.21           | 46.00        | 33.79       | 9.000           | L1   | OFF    | 9.8        |
| 4.2598          | 12.99           | 46.00        | 33.01       | 9.000           | L1   | OFF    | 9.8        |
| 19.1863         | 22.18           | 50.00        | 27.82       | 9.000           | L1   | OFF    | 10.3       |
| 19.2763         | 22.16           | 50.00        | 27.84       | 9.000           | L1   | OFF    | 10.3       |
| 19.2808         | 22.21           | 50.00        | 27.79       | 9.000           | L1   | OFF    | 10.3       |
| 19.3168         | 22.16           | 50.00        | 27.84       | 9.000           | L1   | OFF    | 10.3       |
| 19.3393         | 22.10           | 50.00        | 27.90       | 9.000           | L1   | OFF    | 10.3       |
| 19.4833         | 21.99           | 50.00        | 28.01       | 9.000           | L1   | OFF    | 10.3       |
| 19.5215         | 21.98           | 50.00        | 28.02       | 9.000           | L1   | OFF    | 10.3       |

2022-09-28

오후 1:56:05



**Conducted Emissions (Line 2)**

BTLE MODE\_N


1 / 2

**Test Report**

**Common Information**

EUT : SM-S911B/DS  
 Manufacturer : SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions : BTLE MODE\_N

Full Spectrum

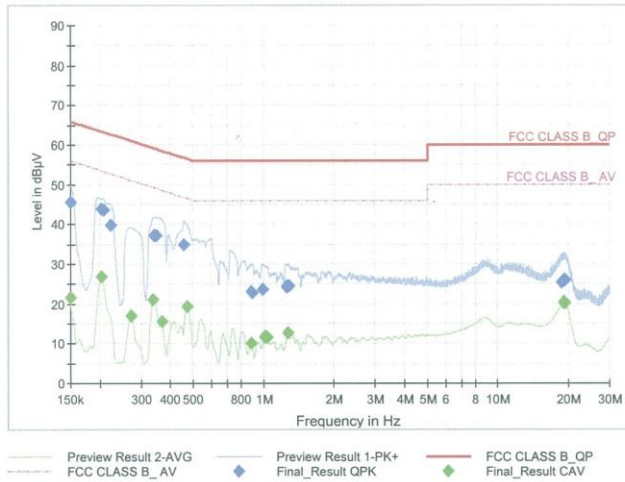

**Final Result QPK**

| Frequency (MHz) | QuasiPeak (dBµV) | Limit (dBµV) | Margin (dB) | Bandwidth (kHz) | Line | Filter | Corr. (dB) |
|-----------------|------------------|--------------|-------------|-----------------|------|--------|------------|
| 0.1500          | 45.49            | 66.00        | 20.51       | 9.000           | N    | OFF    | 9.6        |
| 0.2040          | 43.98            | 63.45        | 19.47       | 9.000           | N    | OFF    | 9.6        |
| 0.2085          | 43.52            | 63.27        | 19.75       | 9.000           | N    | OFF    | 9.6        |
| 0.2220          | 39.73            | 62.74        | 23.01       | 9.000           | N    | OFF    | 9.6        |
| 0.3413          | 37.15            | 59.17        | 22.02       | 9.000           | N    | OFF    | 9.6        |
| 0.3480          | 37.09            | 59.01        | 21.92       | 9.000           | N    | OFF    | 9.6        |
| 0.4583          | 34.90            | 56.72        | 21.83       | 9.000           | N    | OFF    | 9.6        |
| 0.8870          | 23.03            | 56.00        | 32.97       | 9.000           | N    | OFF    | 9.7        |
| 0.8960          | 22.71            | 56.00        | 33.29       | 9.000           | N    | OFF    | 9.7        |
| 0.9928          | 23.68            | 56.00        | 32.32       | 9.000           | N    | OFF    | 9.7        |
| 1.2583          | 24.31            | 56.00        | 31.69       | 9.000           | N    | OFF    | 9.7        |
| 1.2628          | 24.57            | 56.00        | 31.43       | 9.000           | N    | OFF    | 9.7        |
| 1.2808          | 24.43            | 56.00        | 31.57       | 9.000           | N    | OFF    | 9.7        |
| 18.7858         | 25.48            | 60.00        | 34.52       | 9.000           | N    | OFF    | 10.4       |
| 19.1615         | 25.94            | 60.00        | 34.06       | 9.000           | N    | OFF    | 10.4       |
| 19.1953         | 25.91            | 60.00        | 34.09       | 9.000           | N    | OFF    | 10.4       |
| 19.2335         | 25.89            | 60.00        | 34.11       | 9.000           | N    | OFF    | 10.4       |
| 19.3145         | 26.02            | 60.00        | 33.98       | 9.000           | N    | OFF    | 10.5       |

2022-09-28

오후 2:01:55

BTLE MODE\_N

2 / 2

**Final Result CAV**

| Frequency (MHz) | CAverage (dBμV) | Limit (dBμV) | Margin (dB) | Bandwidth (kHz) | Line | Filter | Corr. (dB) |
|-----------------|-----------------|--------------|-------------|-----------------|------|--------|------------|
| 0.1500          | 21.59           | 56.00        | 34.41       | 9.000           | N    | OFF    | 9.6        |
| 0.2040          | 26.84           | 53.45        | 26.61       | 9.000           | N    | OFF    | 9.6        |
| 0.2715          | 17.13           | 51.07        | 33.94       | 9.000           | N    | OFF    | 9.6        |
| 0.3390          | 20.92           | 49.23        | 28.31       | 9.000           | N    | OFF    | 9.6        |
| 0.3683          | 15.51           | 48.54        | 33.04       | 9.000           | N    | OFF    | 9.6        |
| 0.4718          | 19.36           | 46.48        | 27.12       | 9.000           | N    | OFF    | 9.6        |
| 0.8870          | 10.20           | 46.00        | 35.80       | 9.000           | N    | OFF    | 9.7        |
| 1.0108          | 11.69           | 46.00        | 34.31       | 9.000           | N    | OFF    | 9.7        |
| 1.0198          | 11.61           | 46.00        | 34.39       | 9.000           | N    | OFF    | 9.7        |
| 1.0378          | 11.47           | 46.00        | 34.53       | 9.000           | N    | OFF    | 9.7        |
| 1.2695          | 12.66           | 46.00        | 33.34       | 9.000           | N    | OFF    | 9.7        |
| 1.2763          | 12.81           | 46.00        | 33.19       | 9.000           | N    | OFF    | 9.7        |
| 19.0760         | 20.23           | 50.00        | 29.77       | 9.000           | N    | OFF    | 10.4       |
| 19.1615         | 20.30           | 50.00        | 29.70       | 9.000           | N    | OFF    | 10.4       |
| 19.1930         | 20.27           | 50.00        | 29.73       | 9.000           | N    | OFF    | 10.4       |
| 19.2313         | 20.33           | 50.00        | 29.67       | 9.000           | N    | OFF    | 10.4       |
| 19.2358         | 20.34           | 50.00        | 29.66       | 9.000           | N    | OFF    | 10.4       |
| 19.4428         | 20.22           | 50.00        | 29.78       | 9.000           | N    | OFF    | 10.5       |

2022-09-28

오후 2:01:55

## 10. LIST OF TEST EQUIPMENT

### Conducted Test

| Equipment                                    | Model         | Manufacturer    | Serial No. | Due to Calibration | Calibration Interval |
|--|---------------|-----------------|------------|--------------------|----------------------|
| LISN   | ENV216        | Rohde & Schwarz | 102245     | 08/22/2023         | Annual               |
| EMI Test Receiver                            | ESR           | Rohde & Schwarz | 101910     | 06/07/2023         | Annual               |
| Temperature Chamber                          | SU-642        | ESPEC           | 0093008124 | 03/04/2023         | Annual               |
| Signal Analyzer                              | N9030A        | Keysight        | MY55410508 | 09/06/2023         | Annual               |
| Power Meter                                  | N1911A        | Agilent         | MY45100523 | 03/24/2023         | Annual               |
| Power Sensor                                 | N1921A        | Agilent         | MY57820067 | 03/24/2023         | Annual               |
| Directional Coupler                          | 87300B        | Agilent         | 3116A03621 | 11/02/2022         | Annual               |
| Power Splitter                               | 11667B        | Hewlett Packard | 10545      | 02/03/2023         | Annual               |
| DC Power Supply                              | E3646A        | Agilent         | MY40002937 | 12/14/2022         | Annual               |
| Attenuator(10 dB)(DC-26.5 GHz)               | 5910-N-50-010 | H+S             | 00801      | 10/29/2022         | Annual               |
| Attenuator(20 dB)                            | 18N-20dB      | Rohde & Schwarz | 8          | 03/07/2023         | Annual               |
| Software                                     | EMC32         | Rohde & Schwarz | N/A        | N/A                | N/A                  |
| FCC WLAN&BT&BLE Conducted Test Software v3.0 | N/A           | HCT CO., LTD.   | N/A        | N/A                | N/A                  |

### **Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

**Radiated Test**

| Equipment                           | Model                              | Manufacturer           | Serial No.  | Due to Calibration | Calibration Interval |
|-------------------------------------|------------------------------------|------------------------|-------------|--------------------|----------------------|
| Controller(Antenna mast)            | CO3000                             | Innco system           | CO3000-4p   | N/A                | N/A                  |
| Antenna Position Tower              | MA4640/800-XP-EP                   | Innco system           | N/A         | N/A                | N/A                  |
| Controller                          | EM2090                             | Emco                   | 060520      | N/A                | N/A                  |
| Turn Table                          | N/A                                | Ets                    | N/A         | N/A                | N/A                  |
| Loop Antenna                        | FMZB 1513                          | Rohde & Schwarz        | 1513-333    | 03/17/2024         | Biennial             |
| Hybrid Antenna                      | VULB 9168                          | Schwarzbeck            | 9168-0895   | 08/16/2024         | Biennial             |
| Horn Antenna                        | BBHA 9120D                         | Schwarzbeck            | 9120D-1191  | 11/18/2023         | Biennial             |
| Horn Antenna(15 GHz ~ 40 GHz)       | BBHA9170                           | Schwarzbeck            | BBHA9170124 | 04/12/2023         | Biennial             |
| Amp & Filter Bank Switch Controller | FBSM-01A                           | TNM system             | 0           | N/A                | N/A                  |
| Band Reject Filter                  | WRCJV2400/2483.5-2370/2520-60/12SS | Wainwright Instruments | 2           | 01/06/2023         | Annual               |
| Band Reject Filter                  | WRCJV12-4900-5100-5900-6100-50SS   | Wainwright Instruments | 5           | 06/13/2023         | Annual               |
| Band Reject Filter                  | WRCJV12-4900-5100-5900-6100-50SS   | Wainwright Instruments | 6           | 06/13/2023         | Annual               |
| Band Reject Filter                  | WRCJV5100/5850-40/50-8EEK          | Wainwright Instruments | 1           | 02/07/2023         | Annual               |
| ATT(3 dB) + LNA2(6~18 GHz)          | 18B-03, CBL06185030                | WEINSCHL CERNEK        | N/A         | 12/22/2022         | Annual               |
| ATT(10 dB) + LNA1(0.1~18 GHz)       | 56-10, CBLU1183540B-01             | Api tech, CERNEK       | N/A         | 12/22/2022         | Annual               |
| High Pass Filter                    | WHKX10-2700-3000-18000-40SS        | Wainwright Instruments | N/A         | 12/22/2022         | Annual               |
| High Pass Filter                    | WHKX8-6090-7000-18000-40SS         | Wainwright Instruments | N/A         | 12/22/2022         | Annual               |
| Thru                                | COAXIAL ATTENUATOR                 | T&M SYSTEM             | N/A         | 12/22/2022         | Annual               |
| Power Amplifier                     | CBL18265035                        | CERNEK                 | 22966       | 12/02/2022         | Annual               |
| Power Amplifier                     | CBL26405040                        | CERNEK                 | 25956       | 03/11/2023         | Annual               |
| Spectrum Analyzer                   | FSP(9 kHz ~ 30 GHz)                | Rohde & Schwarz        | 836650/016  | 09/06/2023         | Annual               |
| Spectrum Analyzer                   | FSV40-N(9 kHz ~ 30 GHz)            | Rohde & Schwarz        | 101068-SZ   | 09/07/2023         | Annual               |

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

**11. ANNEX A\_ TEST SETUP PHOTO**

Please refer to test setup photo file no. as follows;

| No. | Description         |
|-----|---------------------|
| 1   | HCT-RF-2210-FC032-P |