

FCC DTS REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Date of Issue:
November 07, 2022

Address:
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Test Site/Location:
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA

Report No.: HCT-RF-2210-FC029-R1

FCC ID: A3LSMS911B

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model: SM-S911B/DS

Additional Model: SM-S911B

EUT Type: Mobile Phone

Average Output Power: Ant.1&2 - 802.11b : 20.40 dBm, 802.11g : 19.41 dBm, 802.11n(HT20) : 19.45 dBm

Frequency Range: 2412 MHz ~ 2472 MHz

Modulation type: CCK/DSSS/OFDM

FCC Classification: Digital Transmission System(DTS)

FCC Rule Part(s): Part 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

REVIEWED BY



Report prepared by : Sang Hoon Lee
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2210-FC029	October 21, 2022	- First Approval Report
HCT-RF-2210-FC029-R1	November 07, 2022	- Updated Output Power & P.S.D Contents

Table of Contents

REVIEWED BY	2
1. EUT DESCRIPTION	5
ANTENNA CONFIGURATIONS	6
2. TEST METHODOLOGY	8
EUT CONFIGURATION	8
EUT EXERCISE	8
GENERAL TEST PROCEDURES	8
DESCRIPTION OF TEST MODES	8
3. INSTRUMENT CALIBRATION.....	9
4. FACILITIES AND ACCREDITATIONS	9
FACILITIES	9
EQUIPMENT	9
5. ANTENNA REQUIREMENTS	10
6. MEASUREMENT UNCERTAINTY	10
7. DESCRIPTION OF TESTS.....	11
8. SUMMARY TEST OF RESULTS	26
9. TEST RESULT	27
9.1 DUTY CYCLE.....	27
9.2 6 dB BANDWIDTH	30
9.3 OUTPUT POWER	36
9.4 POWER SPECTRAL DENSITY	60
9.5 BAND EDGE / CONDUCTED SPURIOUS EMISSIONS.....	68
9.6 RADIATED SPURIOUS EMISSIONS	95
9.7 RADIATED RESTRICTED BAND EDGES	103
9.8 POWERLINE CONDUCTED EMISSIONS	110
10. LIST OF TEST EQUIPMENT	114
11. ANNEX A_ TEST SETUP PHOTO	116

1. EUT DESCRIPTION

Model	SM-S911B/DS		
Additional Model	SM-S911B		
EUT Type	Mobile Phone		
Power Supply	DC 3.88 V		
Frequency Range	2412 MHz ~ 2472 MHz		
Max. RF Output Power	<u>Peak Power</u> (For information only)	Ant.2	802.11b : 25.27 dBm 802.11g : 25.30 dBm 802.11n(HT20) : 25.12 dBm
		Ant.1&2 (MIMO)	802.11b : 27.69 dBm 802.11g : 27.91 dBm 802.11n(HT20) : 27.58 dBm
	<u>Average Power</u>	Ant.2	802.11b : 17.93 dBm 802.11g : 16.95 dBm 802.11n(HT20) : 16.98 dBm
		Ant.1&2 (MIMO)	802.11b : 20.40 dBm 802.11g : 19.41 dBm 802.11n(HT20) : 19.45 dBm
Modulation Type	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n		
Number of Channels	13 Channels		
Date(s) of Tests	September 06, 2022 ~ October 21, 2022		
Serial number	Radiated: R3CT90BE5CR Conducted : R3CT706PENK		

ANTENNA CONFIGURATIONS

1. Antenna configuration

Configurations	SISO		MIMO	
	Ant1	Ant2	CDD	SDM
802.11b	X	O	O	X
802.11g	X	O	O	O
802.11n(HT20)	X	O	O	X

Note:

- (1) O = Support, X = Not Support
- (2) SISO = Single Input Single Output
- (3) SDM = Spatial Diversity Multiplexing
- (4) CDD = Cyclic Delay Diversity
- (5) SISO test was performed for the MIMO test result.

2. This device supports simultaneous transmission operation, which allows for two channels to operate independent of one another in the 2.4 GHz and 5 GHz or 6GHz Bands simultaneously on each antenna.

RSDB Scenario	2.4 GHz	2.4 GHz	5 GHz	5 GHz	6 GHz	6 GHz	Bluetooth	Bluetooth
	WiFi Ant.1	WiFi Ant.2	WiFi Ant.1	WiFi Ant.2	WiFi Ant.1	WiFi Ant.2	Ant.1	Ant.2
2.4 GHz WiFi MIMO + 6 GHz WiFi MIMO	on	on			on	on		
2.4 GHz WiFi MIMO + 5 GHz WiFi MIMO	on	on	on	on				
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO		on	on	on			on	
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 6 GHz WiFi MIMO		on			on	on	on	

3. Directional Gain Calculation

According to KDB 662911 D01 Multiple Transmitter Output v02r01 F) 2) f) (ii)

Directional gain =

$$\bullet \quad \text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ss}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Ant Gain (dBi)	N _{ANT} / N _{ss}	Directional Gain (dBi)
ANT1 -2.01	2 / 2	-0.82
ANT2 -6.13		

Note

According to Ansi C63.10-2013 section 14.4.3, the directional gain is calculated using the formula, where GN_n is the gain of the nth antenna and NANT is the total number of antennas used.

$$\text{Directional Gain} = 10 \cdot \log(((10^{(\text{ANT1 Gain}/20)} + 10^{(\text{ANT2 Gain}/20)})^2)/2) \text{ dBi}$$

Sample MIMO Calculation:

Ex) Ant 1 : 11.58 dBm Ant 2 : 12.08 dBm

$$\text{Ant1} + \text{Ant 2} = \text{MIMO}$$

$$(11.58 \text{ dBm} + 12.08 \text{ dBm}) = (14.387 \text{ mW} + 16.143 \text{ mW}) = 30.53 \text{ mW} = 14.88 \text{ dBm}$$

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled "guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) 'the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices'.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

(1) The antennas of this E.U.T are permanently attached.

(2) The E.U.T Complies with the requirement of §15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	2.00 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.51 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.92 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.48 (Confidence level about 95 %, $k=2$)

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

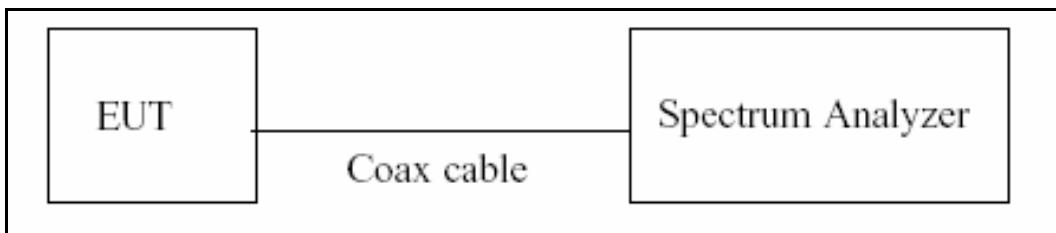

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

7.2. 6 dB Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration

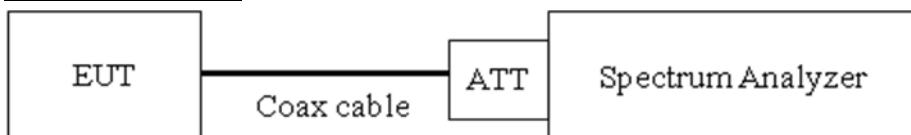

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW \geq 3 x RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration

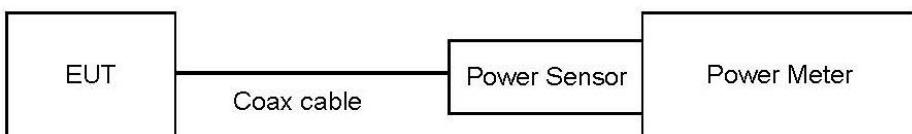

Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
 - : Measure the peak power of the transmitter.
- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Measured Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Measured Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3 kHz BW.

Test Configuration

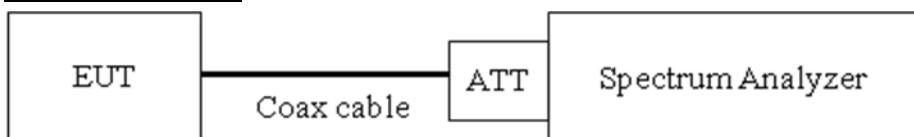

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3) RBW = 3 kHz ≤ RBW ≤ 100 kHz.
- 4) VBW ≥ 3 x RBW.
- 5) Sweep = auto couple
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.
If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11) if then duty factor shall be added to adjust the result if the duty cycle is less than 98 %

Sample Calculation

- Power Spectral Density = Measured Value + ATT loss + Cable loss + Duty Cycle Factor


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (Average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 30 dBc]

Test Configuration

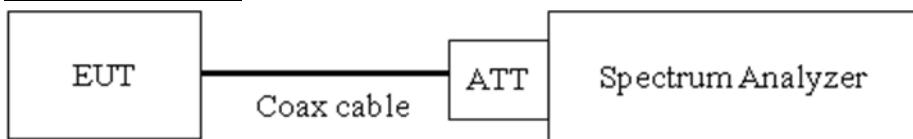

Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW \geq 3 x RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points \geq 2 x Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	20.04
100	20.09
200	20.13
300	20.19
400	20.22
500	20.23
600	20.23
700	20.25
800	20.27
900	20.29
1 000	20.31
2 000	20.46
2 400	20.52
2 480	20.52
2 500	20.52
3 000	20.57
4 000	20.67
5 000	20.75
5 150	20.77
5 850	20.82
6 000	20.82
7 000	20.91
8 000	20.98
9 000	21.05
10 000	21.12
11 000	21.16
12 000	21.24
13 000	21.32
14 000	21.30
15 000	21.32
16 000	21.37
17 000	21.41
18 000	21.47
19 000	21.50
20 000	21.56
21 000	21.77
22 000	21.74
23 000	21.94
24 000	21.77
25 000	21.80
26 000	21.80

Note : 1. 2 400 ~ 2 500 MHz is fundamental frequency range.

2. Factor = Attenuator loss(20 dB) + Cable loss(1ea)
3. EUT Cable : 0.35 dB → Total Port offset : 20.87 dB


7.6. Radiated Test

Limit


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

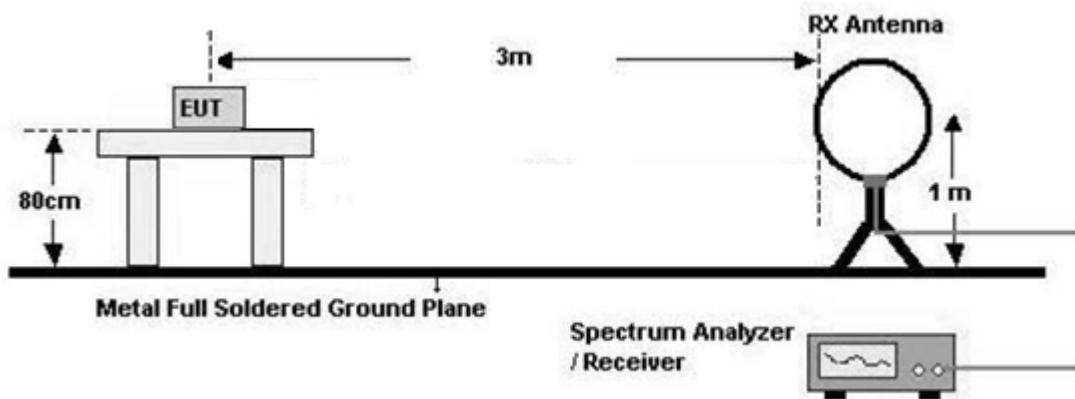

30 MHz - 1 GHz

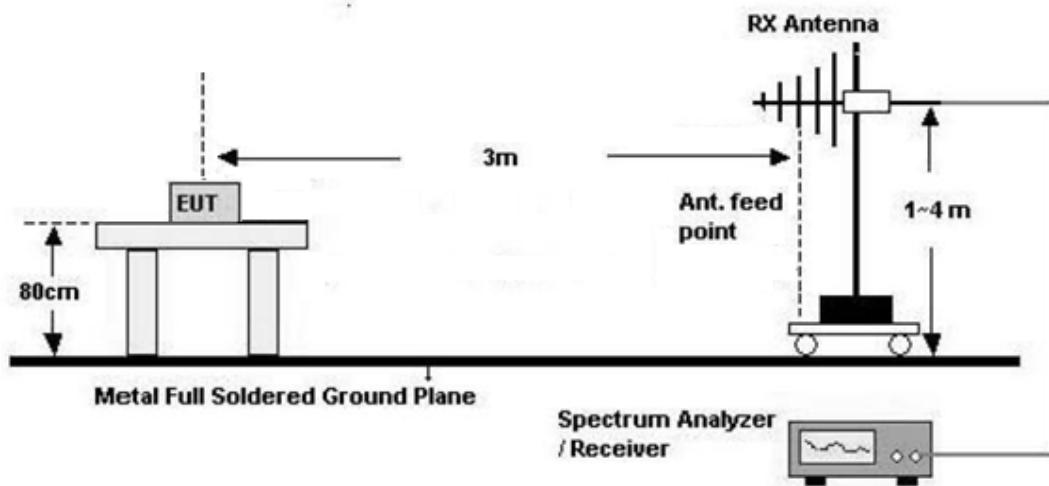

Above 1 GHz

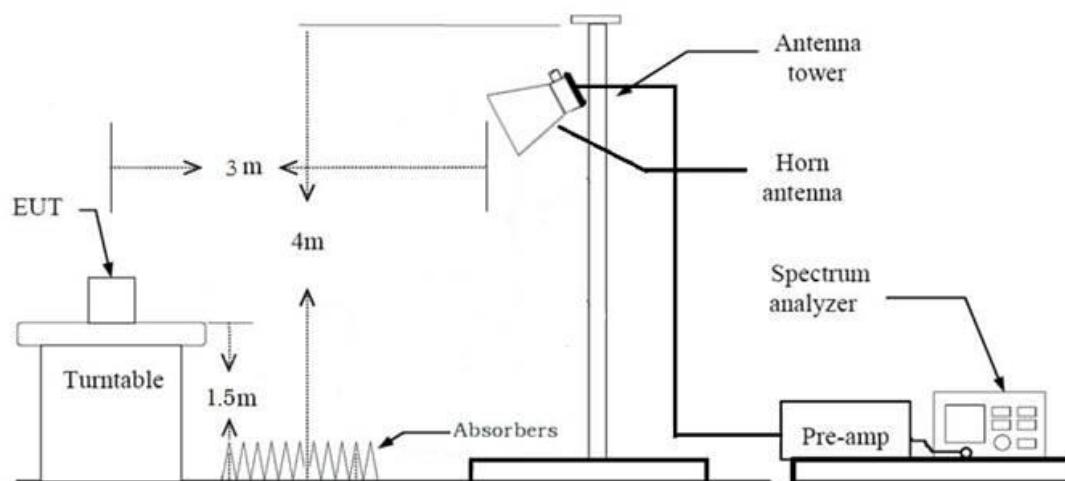

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor($0.009 \text{ MHz} - 0.490 \text{ MHz}$) = $40\log(3 \text{ m}/300 \text{ m}) = -80 \text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor($0.490 \text{ MHz} - 30 \text{ MHz}$) = $40\log(3 \text{ m}/30 \text{ m}) = -40 \text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times \text{RBW}$
9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW \geq 3 x RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

In general, (1) is used mainly

7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak

- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Average): Duty cycle $\geq 98\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

11. Total(Measurement Type : Peak)

$$= \text{Measured value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(A.G)} + \text{Distance Factor(D.F)}$$

Total(Measurement Type : Average, Duty cycle $\geq 98\%$)

$$= \text{Measured value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(A.G)} + \text{Distance Factor(D.F)}$$

Total(Measurement Type : Average, Duty cycle $< 98\%$)

$$\begin{aligned} &= \text{Measured value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(A.G)} + \text{Distance Factor(D.F)} \\ &\quad + \text{Duty Cycle Factor} \end{aligned}$$

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW \geq 3 x RBW

(2) Measurement Type(Average): Duty cycle \geq 98 %,

- Measured Frequency Range : 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle < 98 %, duty cycle variations are less than ± 2 %

- Measured Frequency Range : 2310 MHz ~ 2390 MHz / 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

11. Total(Measurement Type : Peak)

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle $\geq 98\%$)

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle $< 98\%$)

= Measured value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) + Duty Cycle Factor

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

7.8. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
 - Worstcase : Stand alone
2. EUT Axis
 - Radiated Spurious Emissions : Y, Z
 - Radiated Restricted Band Edge : X
3. Duty cycle factor applies only 802.11g/n (Duty cycle < 98 %).
4. All data rate of operation were investigated and the test results are worst case in lowest Data Rate of each mode.
 - 802.11b : 1 Mbps
 - 802.11g : 6 Mbps
 - 802.11n(HT20): MCS0
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane
6. SM-S911B/DS, SM-S911B were tested and the worst case results are reported.
(Worst case : SM-S911B/DS)

Radiated test(RSDB)

1. Please refer to the DTS ax Test Report.
2. SM-S911B/DS, SM-S911B were tested and the worst case results are reported.
(Worst case : SM-S911B/DS)

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + External accessories(Earphone, etc)+Travel Adapter,
Stand alone + Travel Adapter
 - Worstcase : Stand alone + Travel Adapter
2. SM-S911B/DS, SM-S911B were tested and the worst case results are reported.
(Worst case : SM-S911B/DS)

Conducted test

1. The EUT was configured with data rate of highest power.
2. SM-S911B/DS, SM-S911B were tested and the worst case results are reported.
(Worst case : SM-S911B/DS)

8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 7.6		PASS


9. TEST RESULT

9.1 DUTY CYCLE


Mode	Data Rate (Mbps)	T_{on} (ms)	T_{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11b	1	8.808	8.919	0.988	0.054
	2	4.399	4.512	0.975	0.110
	5.5	1.662	1.768	0.940	0.270
	11	0.882	0.983	0.897	0.473
802.11g	6	1.464	1.571	0.932	0.305
	9	0.983	1.089	0.902	0.446
	12	0.745	0.851	0.875	0.580
	18	0.507	0.613	0.826	0.828
	24	0.385	0.491	0.784	1.060
	36	0.263	0.370	0.712	1.473
	48	0.203	0.309	0.656	1.833
	54	0.182	0.289	0.632	1.996
802.11n (HT20)	6.5 (MCS0)	1.246	1.353	0.921	0.356
	13 (MCS1)	0.643	0.750	0.858	0.665
	19.5 (MCS2)	0.441	0.547	0.806	0.939
	26 (MCS3)	0.334	0.446	0.750	1.249
	39 (MCS4)	0.243	0.350	0.696	1.576
	52 (MCS5)	0.187	0.294	0.638	1.952
	58.5 (MCS6)	0.172	0.289	0.596	2.244
	65 (MCS7)	0.159	0.275	0.578	2.379

Test Plots


Duty cycle plot (802.11b(1 Mbps))

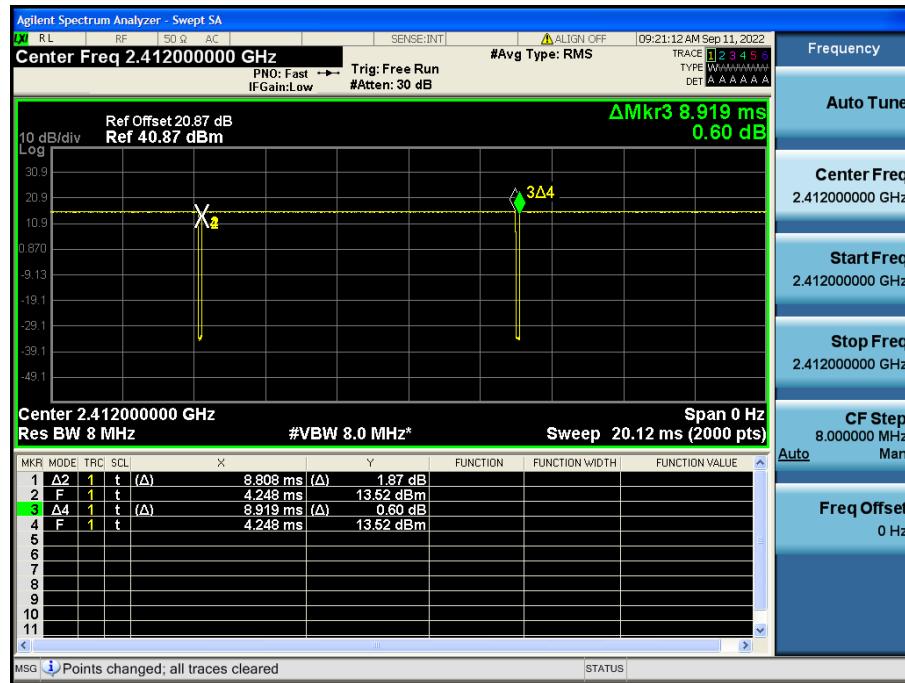

Duty cycle plot (802.11g(6 Mbps))

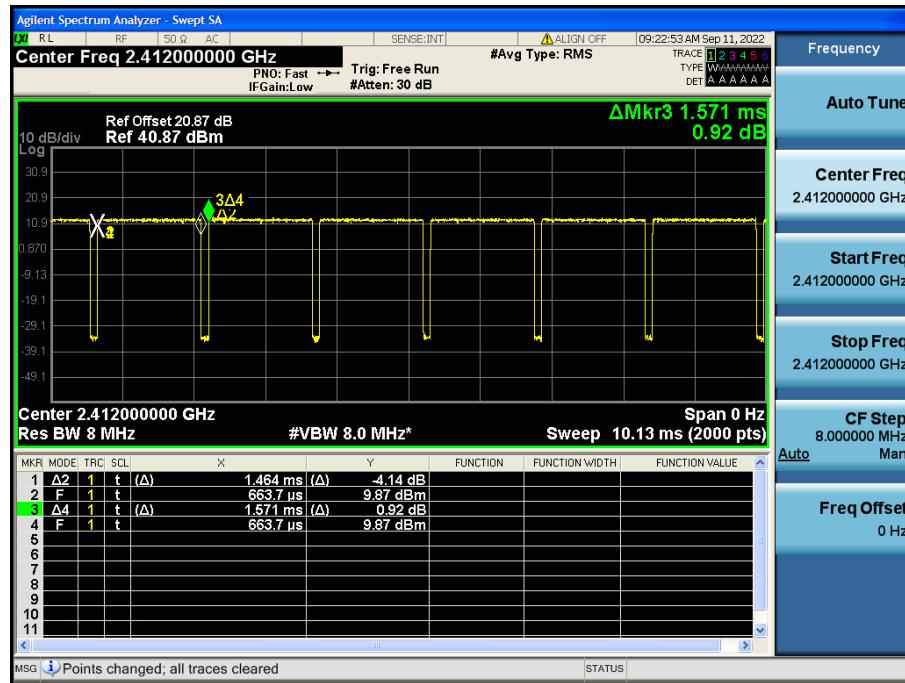

Duty cycle plot (802.11n(MCS0))

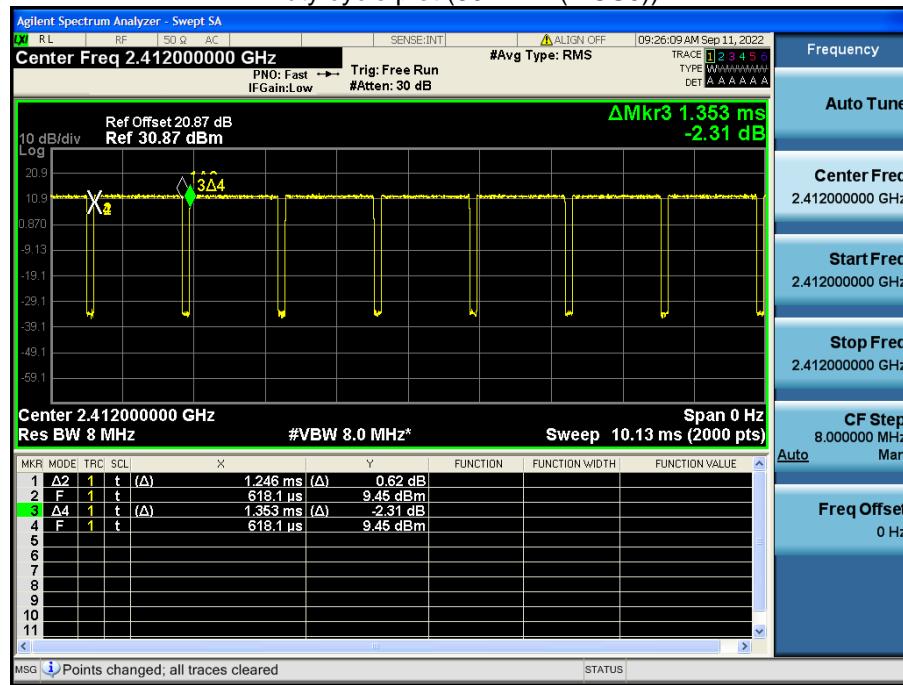
Note:

In order to simplify the report, attached plots were only the lowest data rate.

9.2 6 dB BANDWIDTH
[Ant.1]

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	13.13	0.5
2437	6	14.05	0.5
2462	11	13.09	0.5
2467	12	13.52	0.5
2472	13	13.12	0.5

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	15.98	0.5
2437	6	16.36	0.5
2462	11	16.35	0.5
2467	12	16.36	0.5
2472	13	16.12	0.5

802.11n(HT20) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.44	0.5
2437	6	17.31	0.5
2462	11	17.20	0.5
2467	12	17.31	0.5
2472	13	17.23	0.5

[Ant.2]

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	13.03	0.5
2437	6	13.56	0.5
2462	11	13.12	0.5
2467	12	12.64	0.5
2472	13	13.56	0.5

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.15	0.5
2437	6	16.35	0.5
2462	11	16.11	0.5
2467	12	16.09	0.5
2472	13	16.36	0.5


802.11n(HT20) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.85	0.5
2437	6	17.21	0.5
2462	11	17.22	0.5
2467	12	17.22	0.5
2472	13	17.35	0.5

[Ant.1]**□ Test Plots**


6 dB Bandwidth plot (802.11b-CH 11)



6 dB Bandwidth plot (802.11g-CH 1)

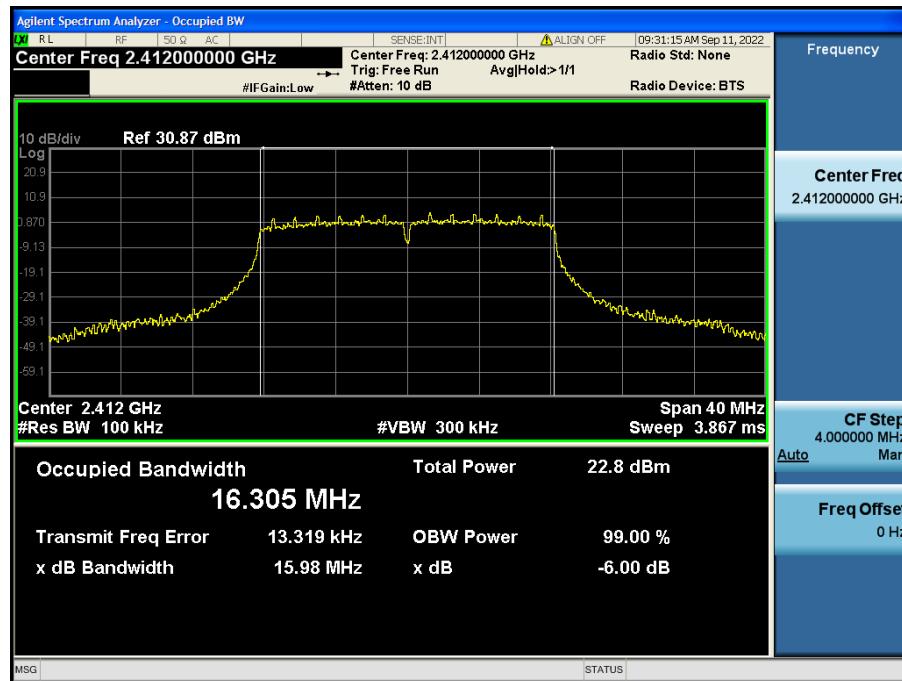

6 dB Bandwidth plot (802.11n_HT20-CH 1)

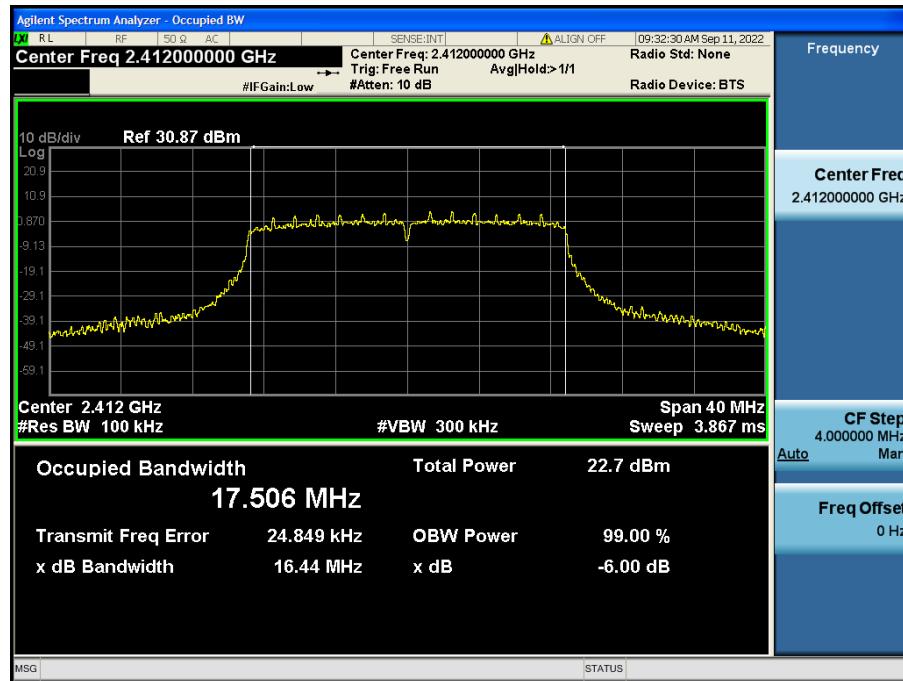


[Ant.2] **Test Plots**


6 dB Bandwidth plot (802.11b-CH 12)



6 dB Bandwidth plot (802.11g-CH 12)

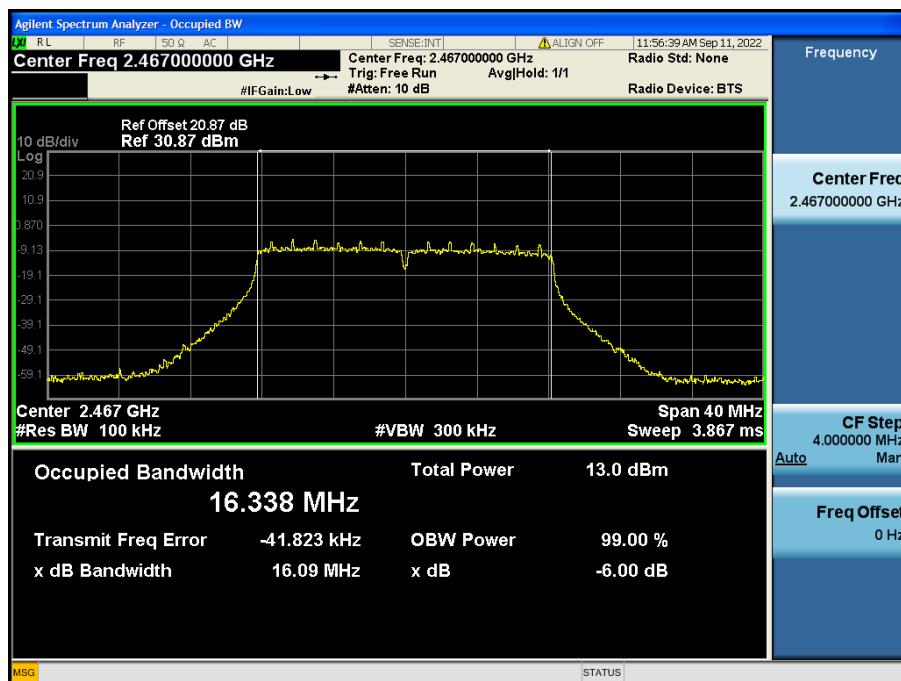

6 dB Bandwidth plot (802.11n_HT20-CH 1)

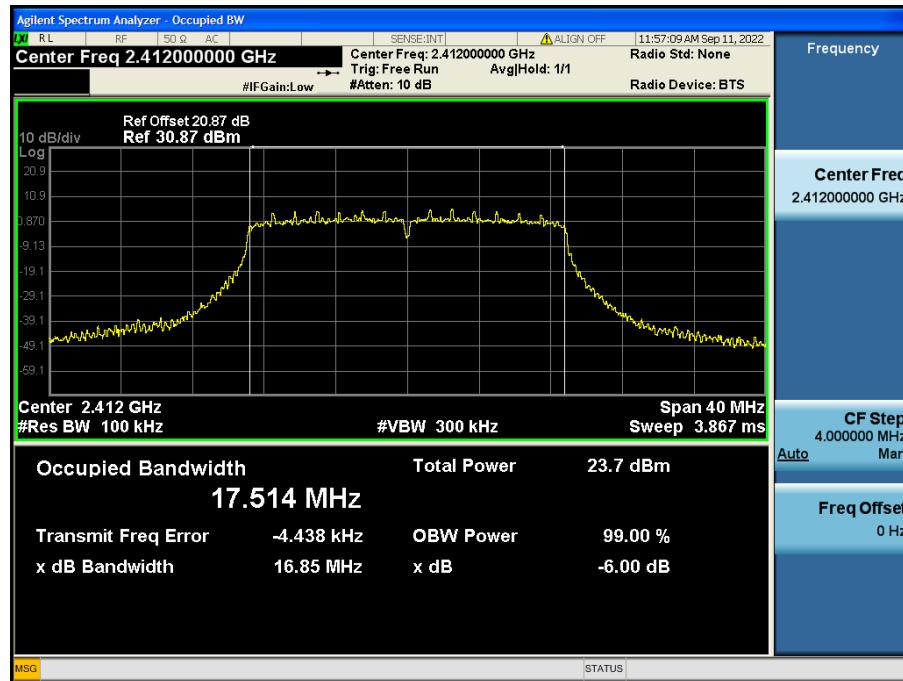**Note:**

In order to simplify the report, attached plots were only the narrowest 6 dB BW channel.

9.3 OUTPUT POWER

Power Level Setting

Peak Power

Power Meter offset

Attenuator loss(20 dB) + Cable loss + EUT Cable loss

[SISO(ANT2)]

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	1	21.80	30
		2	22.04	30
		5.5	23.73	30
		11	25.20	30
2437	6	1	21.85	30
		2	22.09	30
		5.5	23.80	30
		11	25.27	30
2462	11	1	21.81	30
		2	22.02	30
		5.5	23.73	30
		11	25.19	30
2467	12	1	7.59	30
		2	7.78	30
		5.5	9.59	30
		11	10.93	30
2472	13	1	2.27	30
		2	2.50	30
		5.5	4.27	30
		11	5.72	30

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6	24.51	30
		9	24.85	30
		12	25.20	30
		18	24.82	30
		24	25.30	30
		36	25.05	30
		48	25.08	30
		54	25.25	30
2437	6	6	24.55	30
		9	24.78	30
		12	25.18	30
		18	24.78	30
		24	25.16	30
		36	25.01	30
		48	25.08	30
		54	25.28	30
2462	11	6	24.54	30
		9	24.80	30
		12	25.26	30
		18	24.79	30
		24	25.25	30
		36	25.05	30
		48	25.15	30
		54	25.30	30
2467	12	6	12.33	30
		9	12.67	30
		12	13.10	30
		18	12.60	30
		24	13.24	30
		36	12.90	30
		48	12.90	30
		54	13.07	30
2472	13	6	7.16	30
		9	7.45	30
		12	7.89	30
		18	7.47	30
		24	8.44	30
		36	8.16	30
		48	8.21	30
		54	8.39	30

802.11n(HT20) Mode		MCS Index	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	0	24.57	30
		1	24.56	30
		2	24.67	30
		3	24.85	30
		4	24.80	30
		5	24.96	30
		6	24.98	30
		7	24.80	30
2437	6	0	24.65	30
		1	24.62	30
		2	24.79	30
		3	24.87	30
		4	24.93	30
		5	25.12	30
		6	25.10	30
		7	24.95	30
2462	11	0	24.60	30
		1	24.60	30
		2	24.77	30
		3	24.89	30
		4	24.92	30
		5	25.05	30
		6	25.09	30
		7	24.96	30
2467	12	0	12.45	30
		1	12.43	30
		2	12.56	30
		3	12.71	30
		4	12.78	30
		5	12.92	30
		6	12.91	30
		7	12.75	30
2472	13	0	7.59	30
		1	7.62	30
		2	7.74	30
		3	7.97	30
		4	7.97	30
		5	8.03	30
		6	8.05	30
		7	7.96	30

[MIMO(ANT1)]

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	1	20.62	30
		2	20.83	30
		5.5	22.48	30
		11	23.95	30
2437	6	1	20.31	30
		2	20.56	30
		5.5	22.16	30
		11	23.65	30
2462	11	1	20.71	30
		2	20.94	30
		5.5	22.58	30
		11	24.11	30
2467	12	1	6.57	30
		2	6.77	30
		5.5	8.42	30
		11	9.88	30
2472	13	1	-0.29	30
		2	-0.06	30
		5.5	1.81	30
		11	3.31	30

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6	23.59	30
		9	23.96	30
		12	24.35	30
		18	23.95	30
		24	24.47	30
		36	24.12	30
		48	24.17	30
		54	24.42	30
2437	6	6	22.94	30
		9	23.21	30
		12	23.65	30
		18	23.21	30
		24	23.82	30
		36	23.53	30
		48	23.58	30
		54	23.73	30
2462	11	6	23.40	30
		9	23.75	30
		12	24.14	30
		18	23.74	30
		24	24.28	30
		36	23.98	30
		48	24.03	30
		54	24.28	30
2467	12	6	11.13	30
		9	11.41	30
		12	11.84	30
		18	11.40	30
		24	12.00	30
		36	11.67	30
		48	11.72	30
		54	11.92	30
2472	13	6	4.53	30
		9	4.84	30
		12	5.23	30
		18	4.81	30
		24	5.58	30
		36	5.26	30
		48	5.34	30
		54	5.53	30

802.11n(HT20) Mode		MCS Index	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	0	23.59	30
		1	23.60	30
		2	23.66	30
		3	23.85	30
		4	23.87	30
		5	23.97	30
		6	24.00	30
		7	23.83	30
2437	6	0	22.99	30
		1	23.01	30
		2	23.09	30
		3	23.22	30
		4	23.34	30
		5	23.51	30
		6	23.53	30
		7	23.32	30
2462	11	0	23.44	30
		1	23.39	30
		2	23.55	30
		3	23.67	30
		4	23.79	30
		5	23.83	30
		6	23.97	30
		7	23.79	30
2467	12	0	11.24	30
		1	11.18	30
		2	11.29	30
		3	11.51	30
		4	11.54	30
		5	11.64	30
		6	11.69	30
		7	11.54	30
2472	13	0	4.94	30
		1	4.96	30
		2	5.03	30
		3	5.18	30
		4	5.18	30
		5	5.26	30
		6	5.35	30
		7	5.20	30

[MIMO(ANT2)]

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	1	21.80	30
		2	22.04	30
		5.5	23.73	30
		11	25.20	30
2437	6	1	21.85	30
		2	22.09	30
		5.5	23.80	30
		11	25.27	30
2462	11	1	21.81	30
		2	22.02	30
		5.5	23.73	30
		11	25.19	30
2467	12	1	7.59	30
		2	7.78	30
		5.5	9.59	30
		11	10.93	30
2472	13	1	2.27	30
		2	2.50	30
		5.5	4.27	30
		11	5.72	30

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6	24.51	30
		9	24.85	30
		12	25.20	30
		18	24.82	30
		24	25.30	30
		36	25.05	30
		48	25.08	30
		54	25.25	30
2437	6	6	24.55	30
		9	24.78	30
		12	25.18	30
		18	24.78	30
		24	25.16	30
		36	25.01	30
		48	25.08	30
		54	25.28	30
2462	11	6	24.54	30
		9	24.80	30
		12	25.26	30
		18	24.79	30
		24	25.25	30
		36	25.05	30
		48	25.15	30
		54	25.30	30
2467	12	6	12.33	30
		9	12.67	30
		12	13.10	30
		18	12.60	30
		24	13.24	30
		36	12.90	30
		48	12.90	30
		54	13.07	30
2472	13	6	7.16	30
		9	7.45	30
		12	7.89	30
		18	7.47	30
		24	8.44	30
		36	8.16	30
		48	8.21	30
		54	8.39	30

802.11n(HT20) Mode		MCS Index	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	0	24.57	30
		1	24.56	30
		2	24.67	30
		3	24.85	30
		4	24.80	30
		5	24.96	30
		6	24.98	30
		7	24.80	30
2437	6	0	24.65	30
		1	24.62	30
		2	24.79	30
		3	24.87	30
		4	24.93	30
		5	25.12	30
		6	25.10	30
		7	24.95	30
2462	11	0	24.60	30
		1	24.60	30
		2	24.77	30
		3	24.89	30
		4	24.92	30
		5	25.05	30
		6	25.09	30
		7	24.96	30
2467	12	0	12.45	30
		1	12.43	30
		2	12.56	30
		3	12.71	30
		4	12.78	30
		5	12.92	30
		6	12.91	30
		7	12.75	30
2472	13	0	7.59	30
		1	7.62	30
		2	7.74	30
		3	7.97	30
		4	7.97	30
		5	8.03	30
		6	8.05	30
		7	7.96	30

[MIMO(ANT1+ANT2)]

802.11b Mode		Rate (Mbps)	Ant.1 Measured Power(dBm)	Ant.2 Measured Power(dBm)	MIMO Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.					
2412	1	1	20.62	21.80	24.26	30
		2	20.83	22.04	24.49	30
		5.5	22.48	23.73	26.16	30
		11	23.95	25.20	27.63	30
2437	6	1	20.31	21.85	24.16	30
		2	20.56	22.09	24.40	30
		5.5	22.16	23.80	26.06	30
		11	23.65	25.27	27.55	30
2462	11	1	20.71	21.81	24.31	30
		2	20.94	22.02	24.53	30
		5.5	22.58	23.73	26.20	30
		11	24.11	25.19	27.69	30
2467	12	1	6.57	7.59	10.12	30
		2	6.77	7.78	10.32	30
		5.5	8.42	9.59	12.06	30
		11	9.88	10.93	13.45	30
2472	13	1	-0.29	2.27	4.18	30
		2	-0.06	2.50	4.42	30
		5.5	1.81	4.27	6.22	30
		11	3.31	5.72	7.69	30

802.11g Mode		Rate (Mbps)	Ant.1	Ant.2	MIMO	Limit (dBm)
Frequency[MHz]	Channel No.		Measured Power(dBm)	Measured Power(dBm)	Measured Power(dBm)	
2412	1	6	23.59	24.51	27.09	30
		9	23.96	24.85	27.44	30
		12	24.35	25.20	27.81	30
		18	23.95	24.82	27.42	30
		24	24.47	25.30	27.91	30
		36	24.12	25.05	27.62	30
		48	24.17	25.08	27.66	30
		54	24.42	25.25	27.86	30
		6	22.94	24.55	26.83	30
2437	6	9	23.21	24.78	27.08	30
		12	23.65	25.18	27.50	30
		18	23.21	24.78	27.08	30
		24	23.82	25.16	27.55	30
		36	23.53	25.01	27.34	30
		48	23.58	25.08	27.40	30
		54	23.73	25.28	27.58	30
		6	23.40	24.54	27.01	30
		9	23.75	24.80	27.32	30
2462	11	12	24.14	25.26	27.74	30
		18	23.74	24.79	27.31	30
		24	24.28	25.25	27.81	30
		36	23.98	25.05	27.56	30
		48	24.03	25.15	27.64	30
		54	24.28	25.30	27.83	30
		6	11.13	12.33	14.78	30
		9	11.41	12.67	15.10	30
		12	11.84	13.10	15.52	30
2467	12	18	11.40	12.60	15.05	30
		24	12.00	13.24	15.67	30
		36	11.67	12.90	15.34	30
		48	11.72	12.90	15.36	30
		54	11.92	13.07	15.55	30
		6	4.53	7.16	9.05	30
		9	4.84	7.45	9.35	30
		12	5.23	7.89	9.77	30
		18	4.81	7.47	9.35	30
2472	13	24	5.58	8.44	10.25	30
		36	5.26	8.16	9.96	30
		48	5.34	8.21	10.02	30
		54	5.53	8.39	10.20	30

802.11n(HT20) Mode		MCS Index	Ant.1 Measured Power(dBm)	Ant.2 Measured Power(dBm)	MIMO Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.					
2412	1	0	23.59	24.57	27.12	30
		1	23.60	24.56	27.11	30
		2	23.66	24.67	27.20	30
		3	23.85	24.85	27.39	30
		4	23.87	24.80	27.37	30
		5	23.97	24.96	27.50	30
		6	24.00	24.98	27.53	30
		7	23.83	24.80	27.35	30
2437	6	0	22.99	24.65	26.91	30
		1	23.01	24.62	26.90	30
		2	23.09	24.79	27.03	30
		3	23.22	24.87	27.13	30
		4	23.34	24.93	27.22	30
		5	23.51	25.12	27.40	30
		6	23.53	25.10	27.40	30
		7	23.32	24.95	27.22	30
2462	11	0	23.44	24.60	27.07	30
		1	23.39	24.60	27.04	30
		2	23.55	24.77	27.21	30
		3	23.67	24.89	27.33	30
		4	23.79	24.92	27.40	30
		5	23.83	25.05	27.49	30
		6	23.97	25.09	27.58	30
		7	23.79	24.96	27.43	30
2467	12	0	11.24	12.45	14.90	30
		1	11.18	12.43	14.86	30
		2	11.29	12.56	14.98	30
		3	11.51	12.71	15.16	30
		4	11.54	12.78	15.22	30
		5	11.64	12.92	15.34	30
		6	11.69	12.91	15.35	30
		7	11.54	12.75	15.20	30
2472	13	0	4.94	7.59	9.47	30
		1	4.96	7.62	9.50	30
		2	5.03	7.74	9.61	30
		3	5.18	7.97	9.81	30
		4	5.18	7.97	9.81	30
		5	5.26	8.03	9.87	30
		6	5.35	8.05	9.92	30
		7	5.20	7.96	9.81	30

Average Power

Power Meter offset Loss = Attenuator loss(20 dB) + Cable loss + EUT Cable loss

[SISO(ANT2)]

802.11b Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	1	17.78	0.054	17.84	30
		2	17.73	0.110	17.84	30
		5.5	17.56	0.270	17.83	30
		11	17.37	0.473	17.84	30
2437	6	1	17.84	0.054	17.90	30
		2	17.80	0.110	17.91	30
		5.5	17.62	0.270	17.89	30
		11	17.40	0.473	17.88	30
2462	11	1	17.86	0.054	17.92	30
		2	17.82	0.110	17.93	30
		5.5	17.63	0.270	17.90	30
		11	17.43	0.473	17.91	30
2467	12	1	4.82	0.054	4.87	30
		2	4.74	0.110	4.85	30
		5.5	4.61	0.270	4.88	30
		11	4.41	0.473	4.88	30
2472	13	1	-0.54	0.054	-0.49	30
		2	-0.57	0.110	-0.46	30
		5.5	-0.65	0.270	-0.39	30
		11	-0.84	0.473	-0.36	30

802.11g Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	6	16.45	0.305	16.75	30
		9	16.33	0.446	16.77	30
		12	16.23	0.580	16.81	30
		18	16.03	0.828	16.86	30
		24	15.65	1.060	16.71	30
		36	15.27	1.473	16.75	30
		48	14.95	1.833	16.79	30
		54	14.83	1.996	16.83	30
		6	16.49	0.305	16.80	30
2437	6	9	16.42	0.446	16.86	30
		12	16.19	0.580	16.77	30
		18	16.12	0.828	16.95	30
		24	15.79	1.060	16.85	30
		36	15.41	1.473	16.88	30
		48	15.10	1.833	16.93	30
		54	14.86	1.996	16.85	30
		6	16.46	0.305	16.76	30
		9	16.28	0.446	16.73	30
2462	11	12	16.17	0.580	16.75	30
		18	16.11	0.828	16.94	30
		24	15.78	1.060	16.84	30
		36	15.29	1.473	16.77	30
		48	15.03	1.833	16.87	30
		54	14.92	1.996	16.91	30
		6	4.24	0.305	4.55	30
		9	4.14	0.446	4.59	30
		12	3.97	0.580	4.55	30
2467	12	18	3.83	0.828	4.65	30
		24	3.59	1.060	4.65	30
		36	3.10	1.473	4.58	30
		48	2.82	1.833	4.65	30
		54	2.62	1.996	4.62	30
		6	-0.95	0.305	-0.65	30
		9	-1.06	0.446	-0.61	30
		12	-1.20	0.580	-0.62	30
		18	-1.34	0.828	-0.51	30
2472	13	24	-1.28	1.060	-0.22	30
		36	-1.68	1.473	-0.21	30
		48	-1.96	1.833	-0.13	30
		54	-2.13	1.996	-0.14	30

802.11n(HT20) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	0	16.19	0.356	16.55	30
		1	15.88	0.665	16.54	30
		2	15.72	0.939	16.66	30
		3	15.43	1.249	16.68	30
		4	15.25	1.576	16.82	30
		5	14.92	1.952	16.87	30
		6	14.64	2.244	16.88	30
		7	14.30	2.379	16.68	30
2437	6	0	16.36	0.356	16.71	30
		1	15.94	0.665	16.61	30
		2	15.91	0.939	16.85	30
		3	15.58	1.249	16.83	30
		4	15.35	1.576	16.93	30
		5	15.00	1.952	16.96	30
		6	14.73	2.244	16.98	30
		7	14.46	2.379	16.84	30
2462	11	0	16.28	0.356	16.64	30
		1	15.90	0.665	16.56	30
		2	15.78	0.939	16.72	30
		3	15.48	1.249	16.73	30
		4	15.23	1.576	16.81	30
		5	15.02	1.952	16.98	30
		6	14.74	2.244	16.98	30
		7	14.41	2.379	16.79	30
2467	12	0	4.08	0.356	4.44	30
		1	3.71	0.665	4.38	30
		2	3.60	0.939	4.54	30
		3	3.34	1.249	4.58	30
		4	3.09	1.576	4.67	30
		5	2.79	1.952	4.74	30
		6	2.59	2.244	4.83	30
		7	2.21	2.379	4.59	30
2472	13	0	-0.76	0.356	-0.40	30
		1	-1.13	0.665	-0.47	30
		2	-1.22	0.939	-0.29	30
		3	-1.40	1.249	-0.15	30
		4	-1.71	1.576	-0.13	30
		5	-2.02	1.952	-0.07	30
		6	-2.31	2.244	-0.07	30
		7	-2.63	2.379	-0.25	30

[MIMO(ANT1)]

802.11b Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	1	16.66	0.054	16.71	30
		2	16.67	0.110	16.78	30
		5.5	16.45	0.270	16.72	30
		11	16.29	0.473	16.76	30
2437	6	1	16.21	0.054	16.27	30
		2	16.18	0.110	16.29	30
		5.5	15.99	0.270	16.26	30
		11	15.80	0.473	16.27	30
2462	11	1	16.70	0.054	16.75	30
		2	16.66	0.110	16.77	30
		5.5	16.47	0.270	16.74	30
		11	16.24	0.473	16.72	30
2467	12	1	3.69	0.054	3.75	30
		2	3.63	0.110	3.74	30
		5.5	3.47	0.270	3.74	30
		11	3.28	0.473	3.75	30
2472	13	1	-3.06	0.054	-3.01	30
		2	-3.09	0.110	-2.98	30
		5.5	-3.10	0.270	-2.83	30
		11	-3.27	0.473	-2.79	30

802.11g Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	6	15.48	0.305	15.79	30
		9	15.37	0.446	15.82	30
		12	15.26	0.580	15.84	30
		18	15.06	0.828	15.88	30
		24	14.82	1.060	15.88	30
		36	14.33	1.473	15.81	30
		48	14.00	1.833	15.84	30
		54	13.88	1.996	15.87	30
		6	14.82	0.305	15.13	30
2437	6	9	14.64	0.446	15.09	30
		12	14.53	0.580	15.11	30
		18	14.47	0.828	15.29	30
		24	14.18	1.060	15.24	30
		36	13.74	1.473	15.21	30
		48	13.41	1.833	15.25	30
		54	13.27	1.996	15.27	30
		6	15.26	0.305	15.56	30
		9	15.21	0.446	15.65	30
2462	11	12	15.08	0.580	15.66	30
		18	14.89	0.828	15.72	30
		24	14.56	1.060	15.62	30
		36	14.14	1.473	15.61	30
		48	13.82	1.833	15.65	30
		54	13.70	1.996	15.69	30
		6	3.00	0.305	3.31	30
		9	2.89	0.446	3.34	30
		12	2.77	0.580	3.35	30
2467	12	18	2.59	0.828	3.42	30
		24	2.35	1.060	3.41	30
		36	1.89	1.473	3.37	30
		48	1.58	1.833	3.41	30
		54	1.40	1.996	3.39	30
		6	-3.57	0.305	-3.26	30
		9	-3.67	0.446	-3.22	30
		12	-3.82	0.580	-3.24	30
		18	-3.99	0.828	-3.16	30
2472	13	24	-4.05	1.060	-2.99	30
		36	-4.49	1.473	-3.01	30
		48	-4.80	1.833	-2.97	30
		54	-4.99	1.996	-2.99	30

802.11n(HT20) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	0	15.30	0.356	15.65	30
		1	14.88	0.665	15.55	30
		2	14.74	0.939	15.68	30
		3	14.55	1.249	15.80	30
		4	14.31	1.576	15.89	30
		5	13.99	1.952	15.94	30
		6	13.71	2.244	15.96	30
		7	13.33	2.379	15.71	30
2437	6	0	14.63	0.356	14.99	30
		1	14.23	0.665	14.89	30
		2	14.20	0.939	15.14	30
		3	13.96	1.249	15.21	30
		4	13.61	1.576	15.18	30
		5	13.33	1.952	15.28	30
		6	13.05	2.244	15.29	30
		7	12.80	2.379	15.18	30
2462	11	0	15.02	0.356	15.37	30
		1	14.64	0.665	15.30	30
		2	14.56	0.939	15.50	30
		3	14.26	1.249	15.51	30
		4	14.05	1.576	15.63	30
		5	13.72	1.952	15.68	30
		6	13.56	2.244	15.80	30
		7	13.17	2.379	15.55	30
2467	12	0	2.87	0.356	3.23	30
		1	2.49	0.665	3.15	30
		2	2.36	0.939	3.30	30
		3	2.11	1.249	3.36	30
		4	1.88	1.576	3.46	30
		5	1.54	1.952	3.49	30
		6	1.30	2.244	3.54	30
		7	0.98	2.379	3.35	30
2472	13	0	-3.40	0.356	-3.04	30
		1	-3.76	0.665	-3.10	30
		2	-3.89	0.939	-2.95	30
		3	-4.17	1.249	-2.92	30
		4	-4.49	1.576	-2.91	30
		5	-4.80	1.952	-2.85	30
		6	-5.00	2.244	-2.76	30
		7	-5.33	2.379	-2.95	30

[MIMO(ANT2)]

802.11b Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	1	17.78	0.054	17.84	30
		2	17.73	0.110	17.84	30
		5.5	17.56	0.270	17.83	30
		11	17.37	0.473	17.84	30
2437	6	1	17.84	0.054	17.90	30
		2	17.80	0.110	17.91	30
		5.5	17.62	0.270	17.89	30
		11	17.40	0.473	17.88	30
2462	11	1	17.86	0.054	17.92	30
		2	17.82	0.110	17.93	30
		5.5	17.63	0.270	17.90	30
		11	17.43	0.473	17.91	30
2467	12	1	4.82	0.054	4.87	30
		2	4.74	0.110	4.85	30
		5.5	4.61	0.270	4.88	30
		11	4.41	0.473	4.88	30
2472	13	1	-0.54	0.054	-0.49	30
		2	-0.57	0.110	-0.46	30
		5.5	-0.65	0.270	-0.39	30
		11	-0.84	0.473	-0.36	30

802.11g Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	6	16.45	0.305	16.75	30
		9	16.33	0.446	16.77	30
		12	16.23	0.580	16.81	30
		18	16.03	0.828	16.86	30
		24	15.65	1.060	16.71	30
		36	15.27	1.473	16.75	30
		48	14.95	1.833	16.79	30
		54	14.83	1.996	16.83	30
		6	16.49	0.305	16.80	30
2437	6	9	16.42	0.446	16.86	30
		12	16.19	0.580	16.77	30
		18	16.12	0.828	16.95	30
		24	15.79	1.060	16.85	30
		36	15.41	1.473	16.88	30
		48	15.10	1.833	16.93	30
		54	14.86	1.996	16.85	30
		6	16.46	0.305	16.76	30
		9	16.28	0.446	16.73	30
2462	11	12	16.17	0.580	16.75	30
		18	16.11	0.828	16.94	30
		24	15.78	1.060	16.84	30
		36	15.29	1.473	16.77	30
		48	15.03	1.833	16.87	30
		54	14.92	1.996	16.91	30
		6	4.24	0.305	4.55	30
		9	4.14	0.446	4.59	30
		12	3.97	0.580	4.55	30
2467	12	18	3.83	0.828	4.65	30
		24	3.59	1.060	4.65	30
		36	3.10	1.473	4.58	30
		48	2.82	1.833	4.65	30
		54	2.62	1.996	4.62	30
		6	-0.95	0.305	-0.65	30
		9	-1.06	0.446	-0.61	30
		12	-1.20	0.580	-0.62	30
		18	-1.34	0.828	-0.51	30
2472	13	24	-1.28	1.060	-0.22	30
		36	-1.68	1.473	-0.21	30
		48	-1.96	1.833	-0.13	30
		54	-2.13	1.996	-0.14	30

802.11n(HT20) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	0	16.19	0.356	16.55	30
		1	15.88	0.665	16.54	30
		2	15.72	0.939	16.66	30
		3	15.43	1.249	16.68	30
		4	15.25	1.576	16.82	30
		5	14.92	1.952	16.87	30
		6	14.64	2.244	16.88	30
		7	14.30	2.379	16.68	30
2437	6	0	16.36	0.356	16.71	30
		1	15.94	0.665	16.61	30
		2	15.91	0.939	16.85	30
		3	15.58	1.249	16.83	30
		4	15.35	1.576	16.93	30
		5	15.00	1.952	16.96	30
		6	14.73	2.244	16.98	30
		7	14.46	2.379	16.84	30
2462	11	0	16.28	0.356	16.64	30
		1	15.90	0.665	16.56	30
		2	15.78	0.939	16.72	30
		3	15.48	1.249	16.73	30
		4	15.23	1.576	16.81	30
		5	15.02	1.952	16.98	30
		6	14.74	2.244	16.98	30
		7	14.41	2.379	16.79	30
2467	12	0	4.08	0.356	4.44	30
		1	3.71	0.665	4.38	30
		2	3.60	0.939	4.54	30
		3	3.34	1.249	4.58	30
		4	3.09	1.576	4.67	30
		5	2.79	1.952	4.74	30
		6	2.59	2.244	4.83	30
		7	2.21	2.379	4.59	30
2472	13	0	-0.76	0.356	-0.40	30
		1	-1.13	0.665	-0.47	30
		2	-1.22	0.939	-0.29	30
		3	-1.40	1.249	-0.15	30
		4	-1.71	1.576	-0.13	30
		5	-2.02	1.952	-0.07	30
		6	-2.31	2.244	-0.07	30
		7	-2.63	2.379	-0.25	30

[MIMO(ANT1+ANT2)]

802.11b Mode		Rate (Mbps)	Ant.1 Measured Power(dBm)	Ant.2 Measured Power(dBm)	MIMO Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.					
2412	1	1	16.71	17.84	20.32	30
		2	16.78	17.84	20.35	30
		5.5	16.72	17.83	20.32	30
		11	16.76	17.84	20.34	30
2437	6	1	16.27	17.90	20.17	30
		2	16.29	17.91	20.18	30
		5.5	16.26	17.89	20.16	30
		11	16.27	17.88	20.16	30
2462	11	1	16.75	17.92	20.38	30
		2	16.77	17.93	20.40	30
		5.5	16.74	17.90	20.37	30
		11	16.72	17.91	20.36	30
2467	12	1	3.75	4.87	7.36	30
		2	3.74	4.85	7.34	30
		5.5	3.74	4.88	7.36	30
		11	3.75	4.88	7.36	30
2472	13	1	-3.01	-0.49	1.44	30
		2	-2.98	-0.46	1.47	30
		5.5	-2.83	-0.39	1.57	30
		11	-2.79	-0.36	1.60	30

802.11g Mode		Rate (Mbps)	Ant.1 Measured Power(dBm)	Ant.2 Measured Power(dBm)	MIMO Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.					
2412	1	6	15.79	16.75	19.31	30
		9	15.82	16.77	19.33	30
		12	15.84	16.81	19.36	30
		18	15.88	16.86	19.41	30
		24	15.88	16.71	19.32	30
		36	15.81	16.75	19.31	30
		48	15.84	16.79	19.35	30
		54	15.87	16.83	19.39	30
2437	6	6	15.13	16.80	19.05	30
		9	15.09	16.86	19.08	30
		12	15.11	16.77	19.03	30
		18	15.29	16.95	19.21	30
		24	15.24	16.85	19.13	30
		36	15.21	16.88	19.14	30
		48	15.25	16.93	19.18	30
		54	15.27	16.85	19.14	30
2462	11	6	15.56	16.76	19.21	30
		9	15.65	16.73	19.23	30
		12	15.66	16.75	19.25	30
		18	15.72	16.94	19.38	30
		24	15.62	16.84	19.28	30
		36	15.61	16.77	19.24	30
		48	15.65	16.87	19.31	30
		54	15.69	16.91	19.35	30
2467	12	6	3.31	4.55	6.98	30
		9	3.34	4.59	7.02	30
		12	3.35	4.55	7.00	30
		18	3.42	4.65	7.09	30
		24	3.41	4.65	7.08	30
		36	3.37	4.58	7.02	30
		48	3.41	4.65	7.09	30
		54	3.39	4.62	7.06	30
2472	13	6	-3.26	-0.65	1.25	30
		9	-3.22	-0.61	1.29	30
		12	-3.24	-0.62	1.27	30
		18	-3.16	-0.51	1.37	30
		24	-2.99	-0.22	1.62	30
		36	-3.01	-0.21	1.62	30
		48	-2.97	-0.13	1.69	30
		54	-2.99	-0.14	1.68	30

802.11n(HT20) Mode		MCS Index	Ant.1 Measured Power(dBm)	Ant.2 Measured Power(dBm)	MIMO Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.					
2412	1	0	15.65	16.55	19.14	30
		1	15.55	16.54	19.08	30
		2	15.68	16.66	19.21	30
		3	15.80	16.68	19.27	30
		4	15.89	16.82	19.39	30
		5	15.94	16.87	19.44	30
		6	15.96	16.88	19.45	30
		7	15.71	16.68	19.23	30
2437	6	0	14.99	16.71	18.95	30
		1	14.89	16.61	18.84	30
		2	15.14	16.85	19.09	30
		3	15.21	16.83	19.10	30
		4	15.18	16.93	19.15	30
		5	15.28	16.96	19.21	30
		6	15.29	16.98	19.23	30
		7	15.18	16.84	19.10	30
2462	11	0	15.37	16.64	19.06	30
		1	15.30	16.56	18.99	30
		2	15.50	16.72	19.16	30
		3	15.51	16.73	19.18	30
		4	15.63	16.81	19.27	30
		5	15.68	16.98	19.38	30
		6	15.80	16.98	19.44	30
		7	15.55	16.79	19.23	30
2467	12	0	3.23	4.44	6.88	30
		1	3.15	4.38	6.82	30
		2	3.30	4.54	6.97	30
		3	3.36	4.58	7.03	30
		4	3.46	4.67	7.12	30
		5	3.49	4.74	7.17	30
		6	3.54	4.83	7.24	30
		7	3.35	4.59	7.03	30
2472	13	0	-3.04	-0.40	1.49	30
		1	-3.10	-0.47	1.43	30
		2	-2.95	-0.29	1.59	30
		3	-2.92	-0.15	1.69	30
		4	-2.91	-0.13	1.71	30
		5	-2.85	-0.07	1.77	30
		6	-2.76	-0.07	1.80	30
		7	-2.95	-0.25	1.62	30

9.4 POWER SPECTRAL DENSITY

[SISO(ANT2)]

Mode	Frequency (MHz)	Channel No.	Test Result			
			Measured PSD(dBm) (dBm)	Duty Cycle Factor	Measured PSD(dBm) + Duty Cycle Factor	Limit (dBm)
802.11b	2412	1	-1.865	0.110	-1.755	8 dBm / 3 kHz
	2437	6	-1.971	0.110	-1.861	
	2462	11	-1.453	0.110	-1.343	
	2467	12	-14.735	0.473	-14.262	
	2472	13	-20.489	0.473	-20.016	
802.11g	2412	1	-8.001	0.828	-7.173	8 dBm / 3 kHz
	2437	6	-8.375	0.828	-7.547	
	2462	11	-6.962	0.828	-6.134	
	2467	12	-20.020	0.828	-19.192	
	2472	13	-24.390	1.833	-22.557	
802.11n(HT20)	2412	1	-7.227	2.244	-4.983	8 dBm / 3 kHz
	2437	6	-6.561	2.244	-4.317	
	2462	11	-8.271	2.244	-6.027	
	2467	12	-19.589	2.244	-17.345	
	2472	13	-24.600	2.244	-22.356	

[MIMO(ANT1)]

Mode	Frequency (MHz)	Channel No.	Test Result			
			Measured PSD(dBm)	Duty Cycle Factor	Measured PSD(dBm) + Duty Cycle Factor	Limit (dBm)
802.11b	2412	1	-3.499	0.110	-3.389	8 dBm / 3 kHz
	2437	6	-2.697	0.110	-2.587	
	2462	11	-2.196	0.110	-2.086	
	2467	12	-16.785	0.473	-16.312	
	2472	13	-23.773	0.473	-23.300	
802.11g	2412	1	-8.989	0.828	-8.161	8 dBm / 3 kHz
	2437	6	-9.949	0.828	-9.121	
	2462	11	-9.295	0.828	-8.467	
	2467	12	-21.256	0.828	-20.428	
	2472	13	-28.061	1.833	-26.228	
802.11n(HT20)	2412	1	-8.673	2.244	-6.429	8 dBm / 3 kHz
	2437	6	-9.048	2.244	-6.804	
	2462	11	-8.979	2.244	-6.735	
	2467	12	-21.016	2.244	-18.772	
	2472	13	-27.825	2.244	-25.581	

[MIMO(ANT2)]

Mode	Frequency (MHz)	Channel No.	Test Result			
			Measured PSD (dBm)	Duty Cycle Factor	Measured PSD(dBm) + Duty Cycle Factor	Limit (dBm)
802.11b	2412	1	-1.865	0.110	-1.755	8 dBm / 3 kHz
	2437	6	-1.971	0.110	-1.861	
	2462	11	-1.453	0.110	-1.343	
	2467	12	-14.735	0.473	-14.262	
	2472	13	-20.489	0.473	-20.016	
802.11g	2412	1	-8.001	0.828	-7.173	8 dBm / 3 kHz
	2437	6	-8.375	0.828	-7.547	
	2462	11	-6.962	0.828	-6.134	
	2467	12	-20.020	0.828	-19.192	
	2472	13	-24.390	1.833	-22.557	
802.11n(HT20)	2412	1	-7.227	2.244	-4.983	8 dBm / 3 kHz
	2437	6	-6.561	2.244	-4.317	
	2462	11	-8.271	2.244	-6.027	
	2467	12	-19.589	2.244	-17.345	
	2472	13	-24.600	2.244	-22.356	

[MIMO(ANT1+ANT2)]

Mode	Frequency (MHz)	Channel No.	Test Result			
			Ant.1 Measured Power(dBm) + Duty Cycle Factor	Ant.2 Measured Power(dBm) + Duty Cycle Factor	MIMO Measured Power(dBm)	Limit (dBm)
802.11b	2412	1	-3.389	-1.755	0.515	8 dBm / 3 kHz
	2437	6	-2.587	-1.861	0.802	
	2462	11	-2.086	-1.343	1.312	
	2467	12	-16.312	-14.262	-12.157	
	2472	13	-23.300	-20.016	-18.345	
802.11g	2412	1	-8.161	-7.173	-4.629	8 dBm / 3 kHz
	2437	6	-9.121	-7.547	-5.253	
	2462	11	-8.467	-6.134	-4.136	
	2467	12	-20.428	-19.192	-16.756	
	2472	13	-26.228	-22.557	-21.006	
802.11n(HT20)	2412	1	-6.429	-4.983	-2.636	8 dBm / 3 kHz
	2437	6	-6.804	-4.317	-2.375	
	2462	11	-6.735	-6.027	-3.356	
	2467	12	-18.772	-17.345	-14.990	
	2472	13	-25.581	-22.356	-20.666	

Note :

1. Spectrum Measured Levels are not plot data.


The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset Loss = Attenuator loss(20 dB) + Cable loss + EUT Cable loss

[Ant.1]

 Test Plots


Power Spectral Density (802.11b-CH 11)

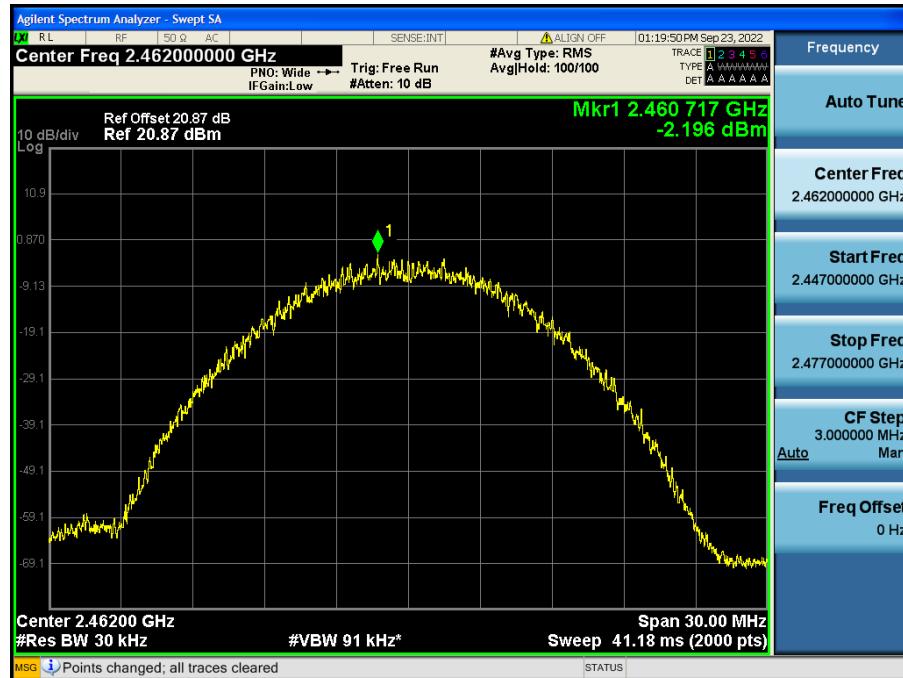

Power Spectral Density (802.11g-CH 11)




Power Spectral Density (802.11n_HT20-CH 6)

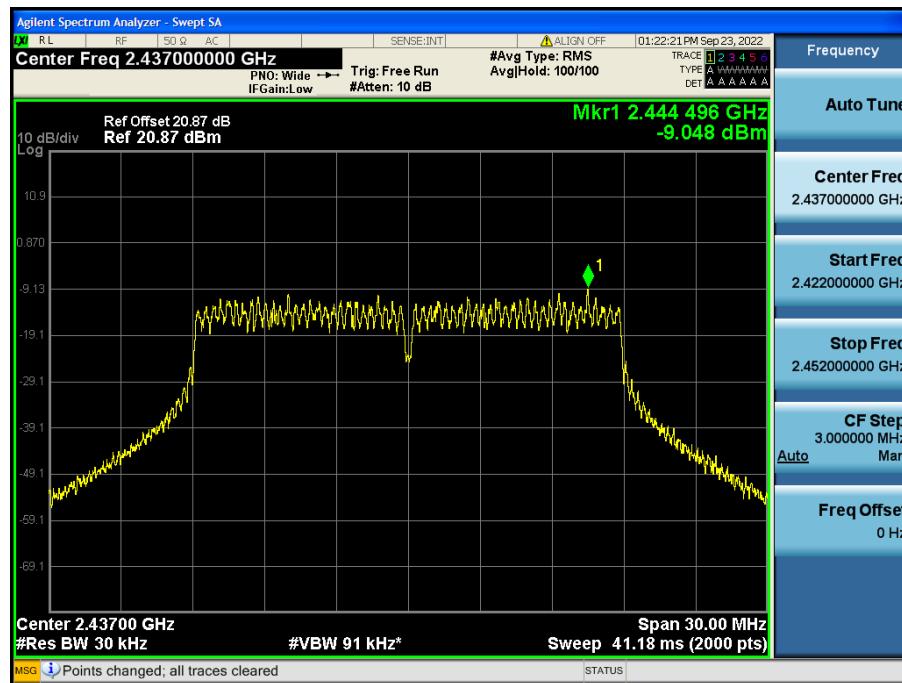


[Ant.2]

 Test Plots


Power Spectral Density (802.11b-CH 11)

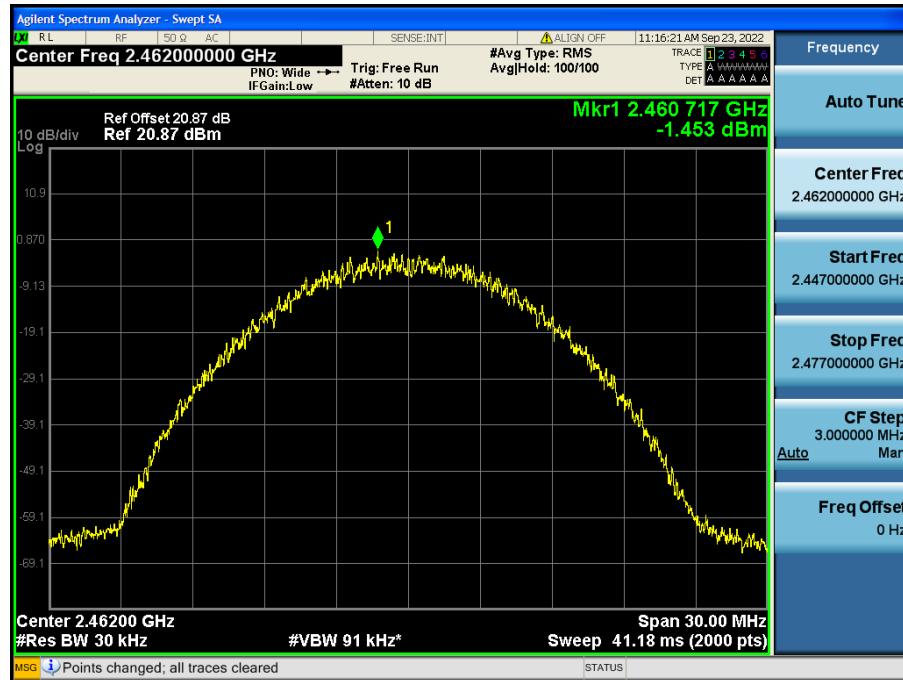

Power Spectral Density (802.11g-CH 11)

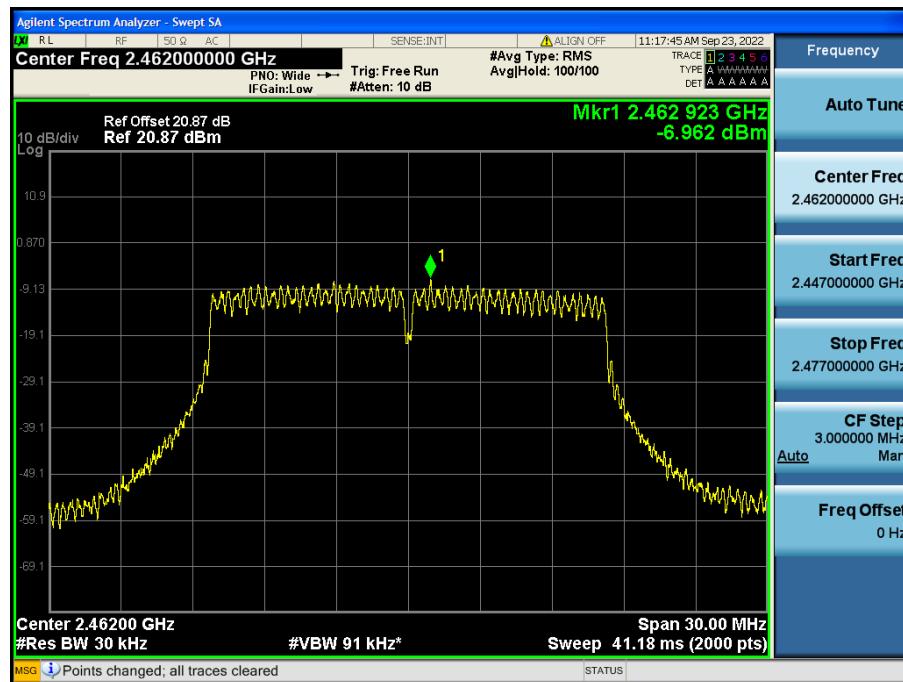

Power Spectral Density (802.11n_HT20-CH 6)

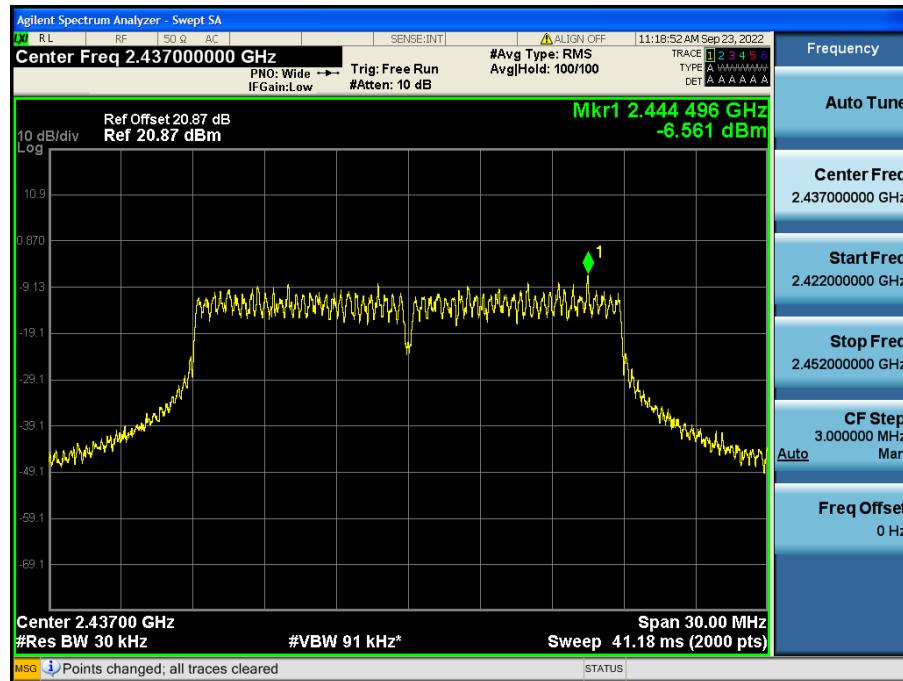**Note :**

In order to simplify the report, attached plots were only the worst case PSD channel.

9.5 BAND EDGE / CONDUCTED SPURIOUS EMISSIONS


Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.


[Ant.1]

 Test Plots(Band Edge)


Band Edge (802.11b-CH1)

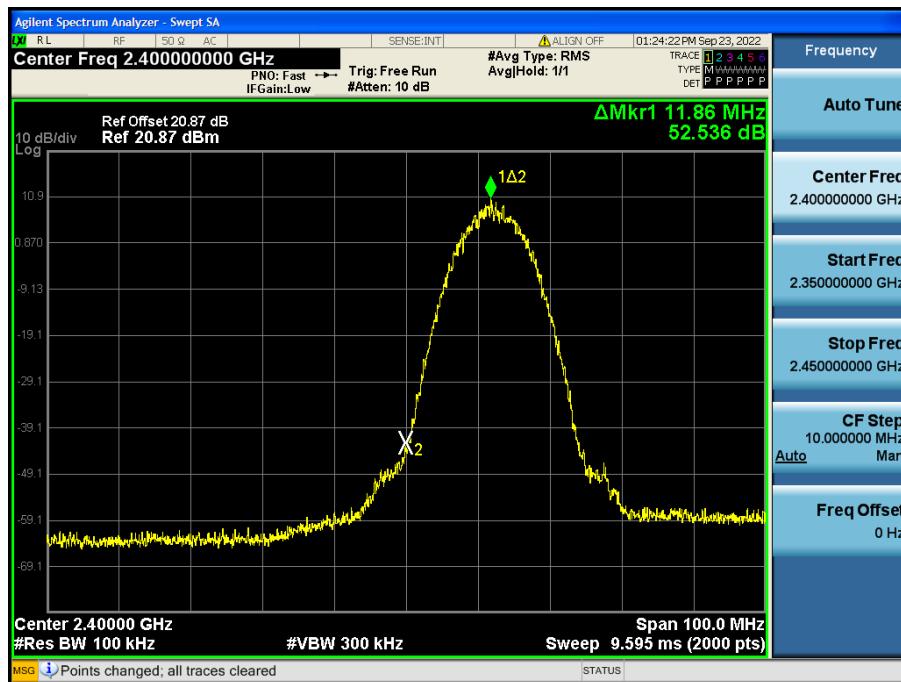


Band Edge (802.11b-CH11)

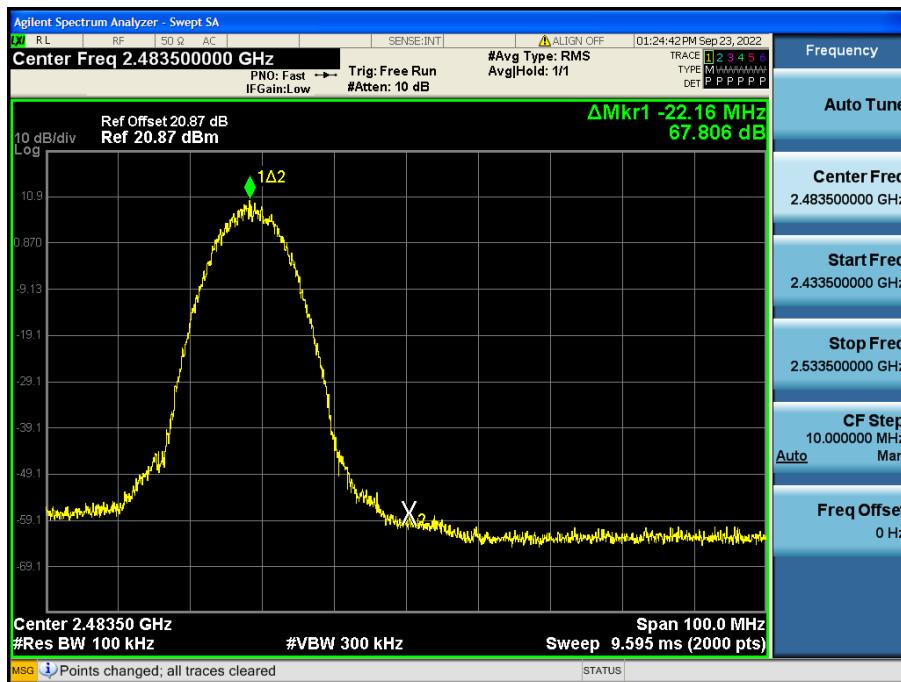


Band Edge (802.11b-CH12)

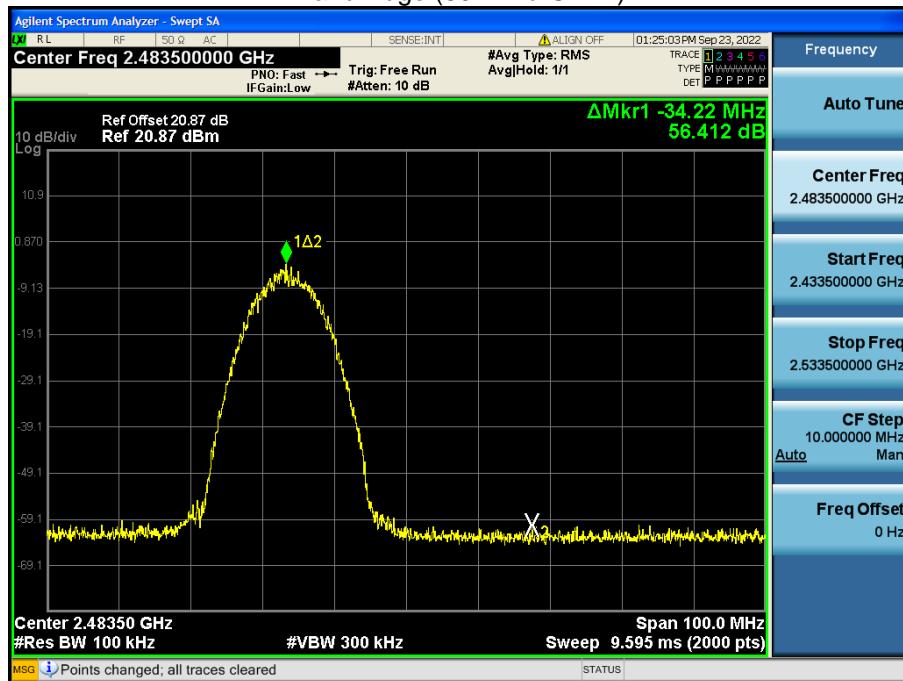


Band Edge (802.11b-CH13)

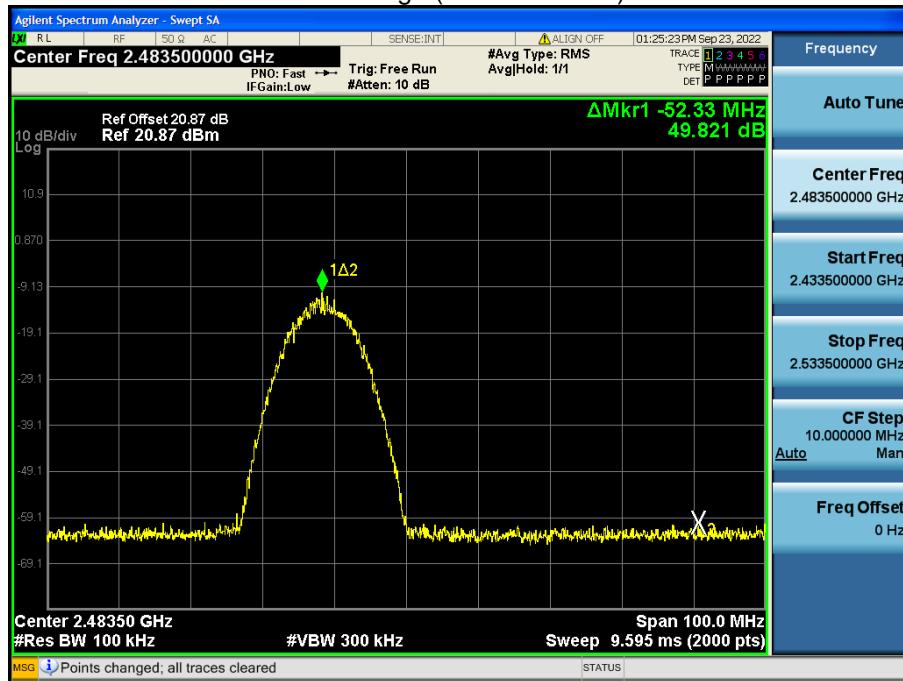


Band Edge (802.11g-CH1)

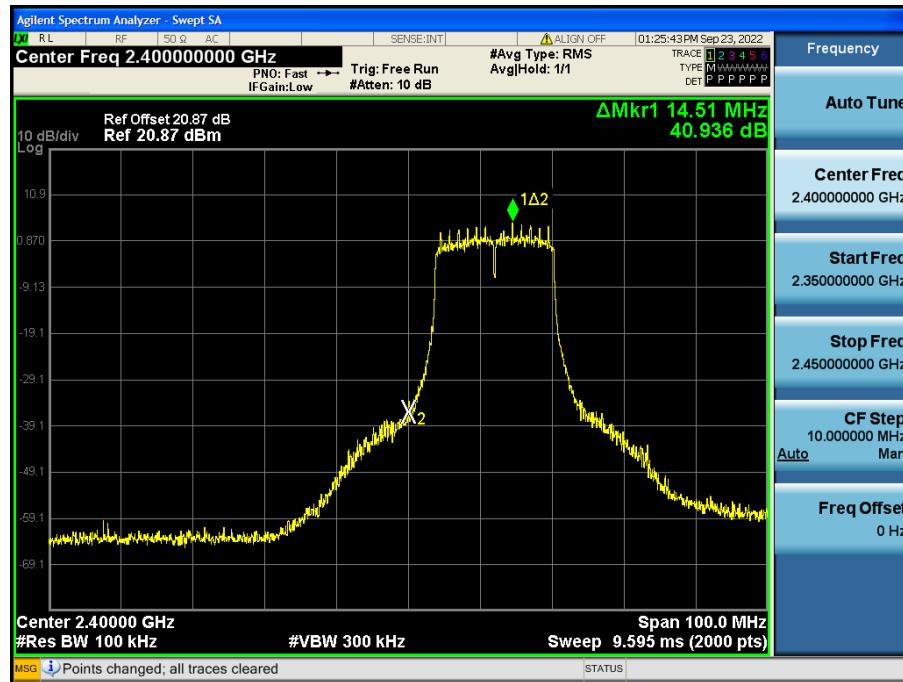


Band Edge (802.11g-CH11)

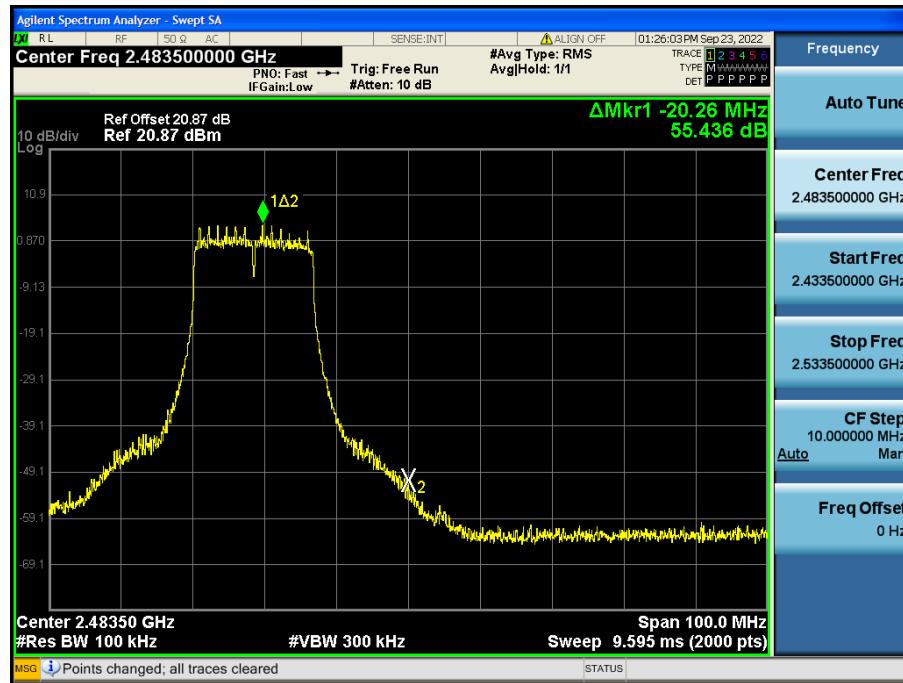


Band Edge (802.11g-CH12)

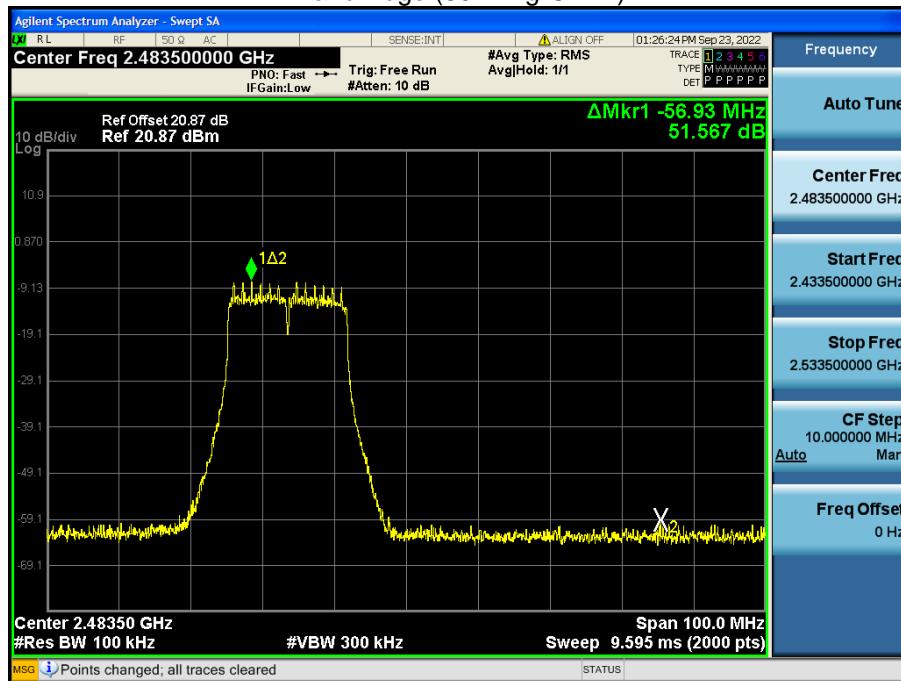

Band Edge (802.11g-CH13)

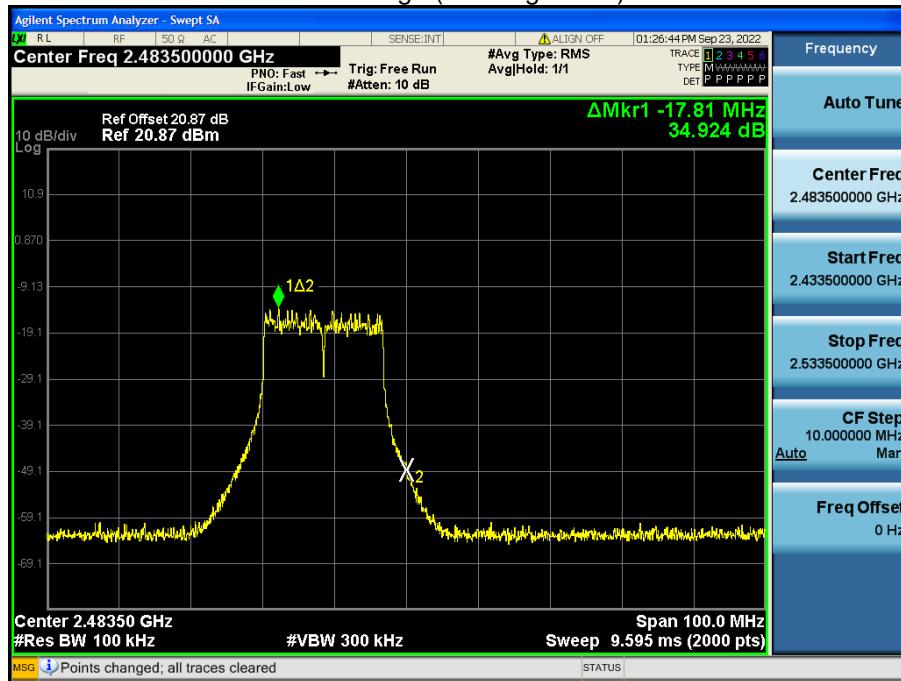


Band Edge (802.11n_HT20-CH1)

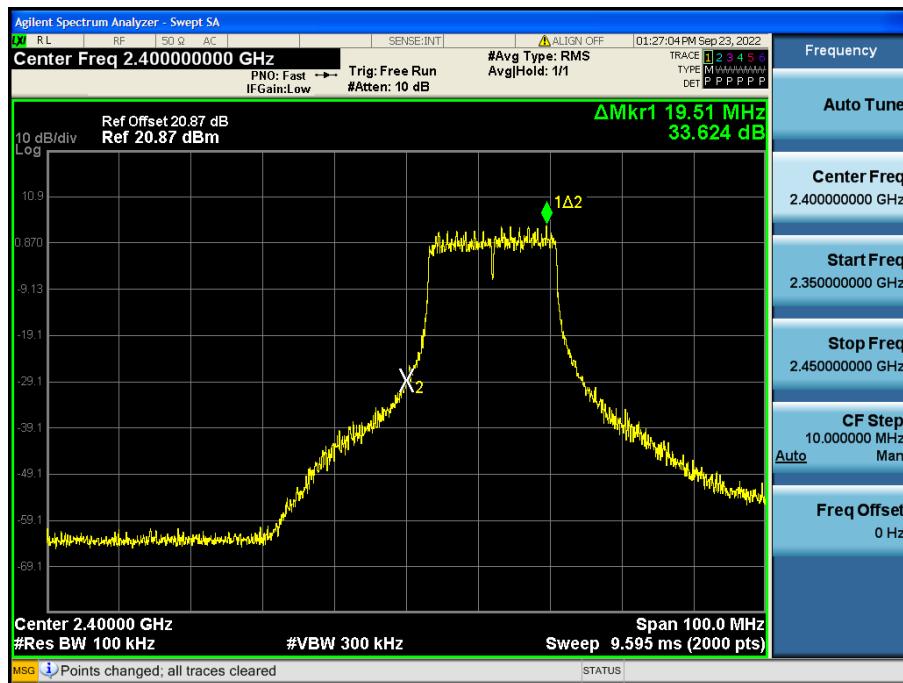


Band Edge (802.11n_HT20-CH11)



Band Edge (802.11n_HT20-CH12)

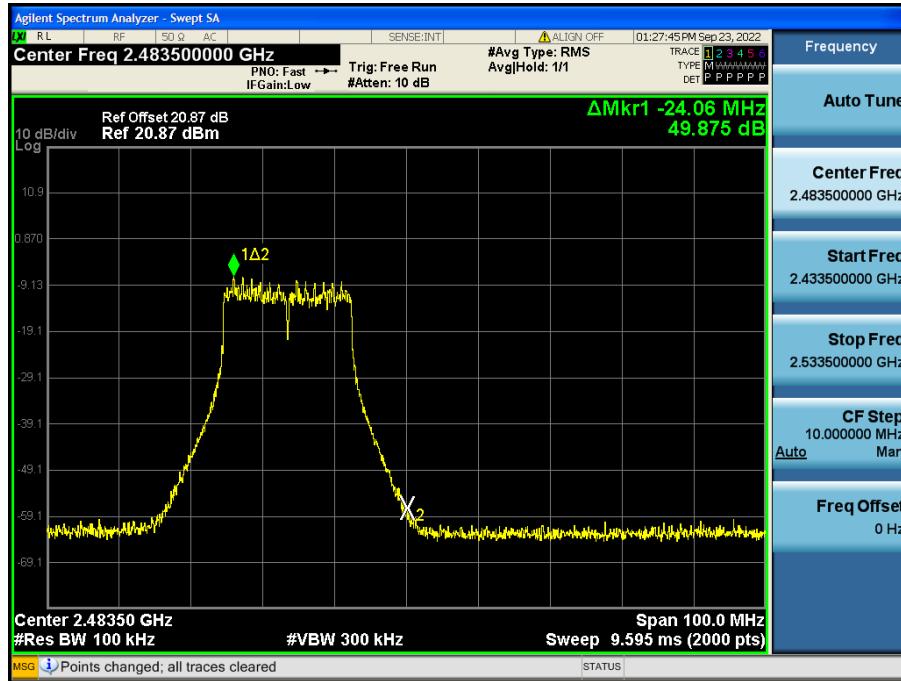


Band Edge (802.11n_HT20-CH13)

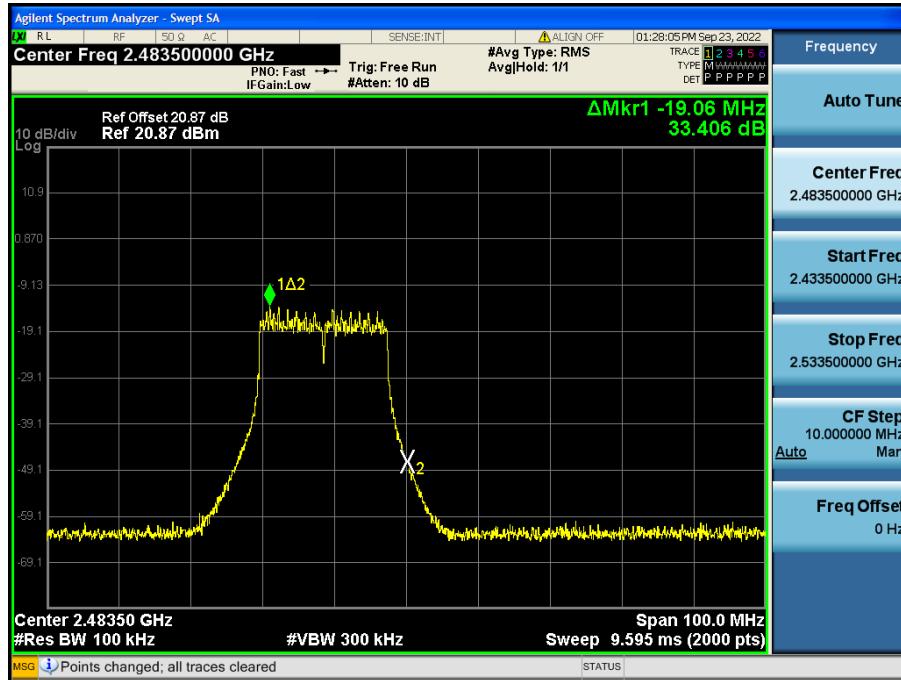


[Ant.2]

■ Test Plots(Band Edge)


Band Edge (802.11b-CH1)

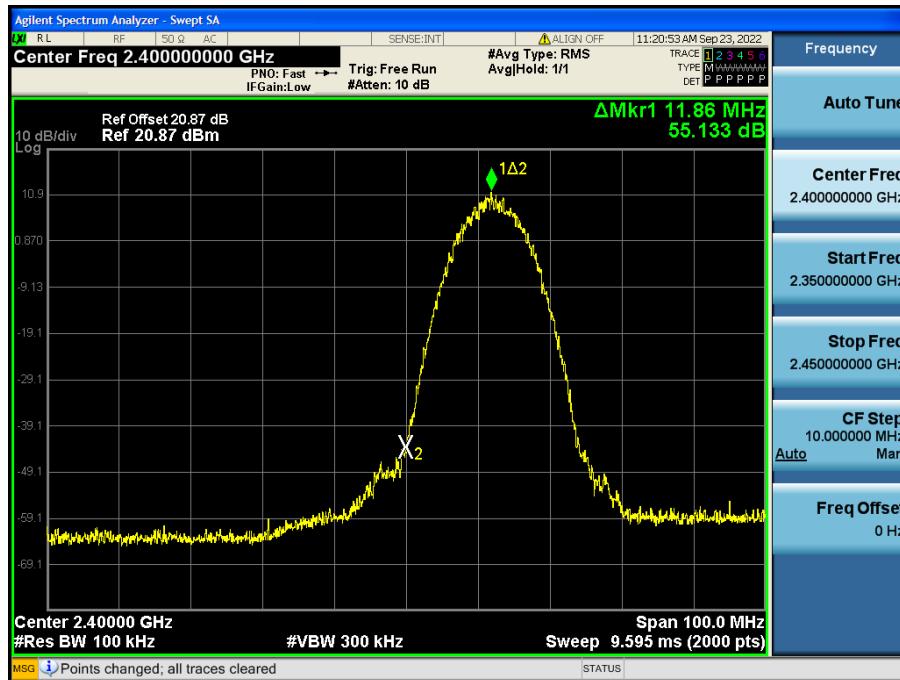


Band Edge (802.11b-CH11)

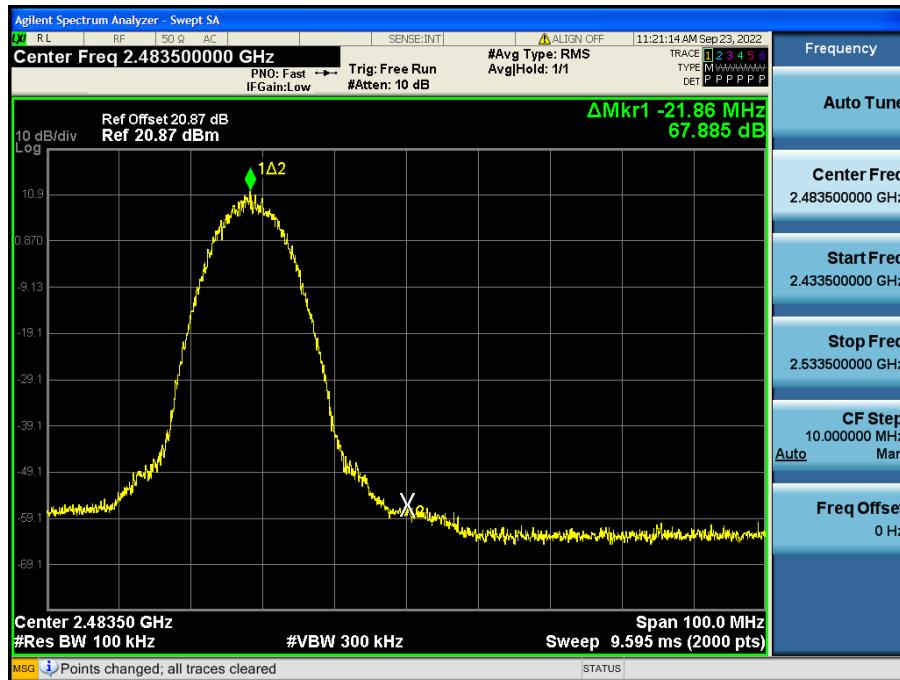


Band Edge (802.11b-CH12)

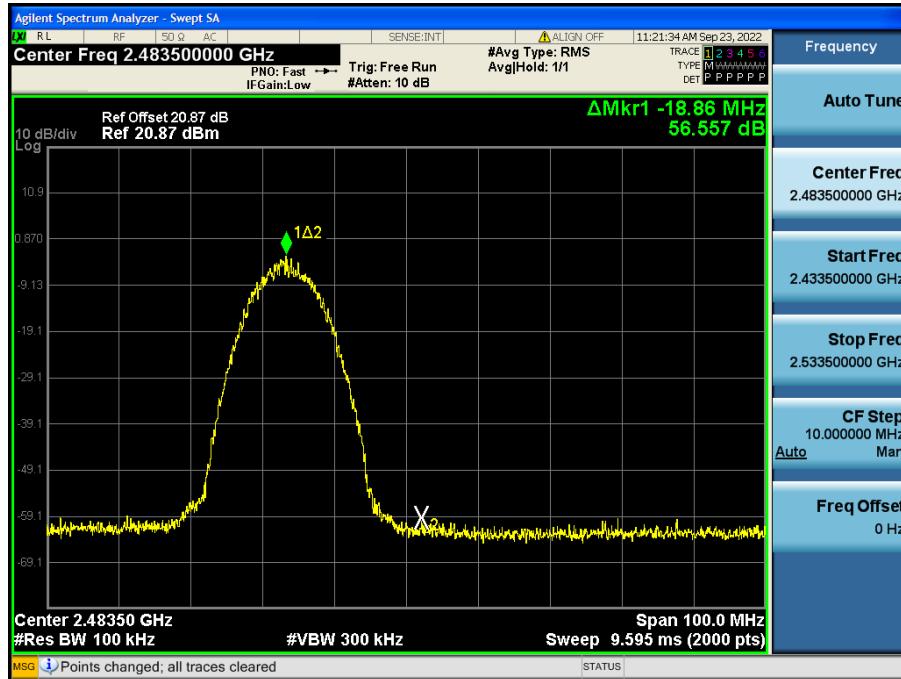


Band Edge (802.11b-CH13)

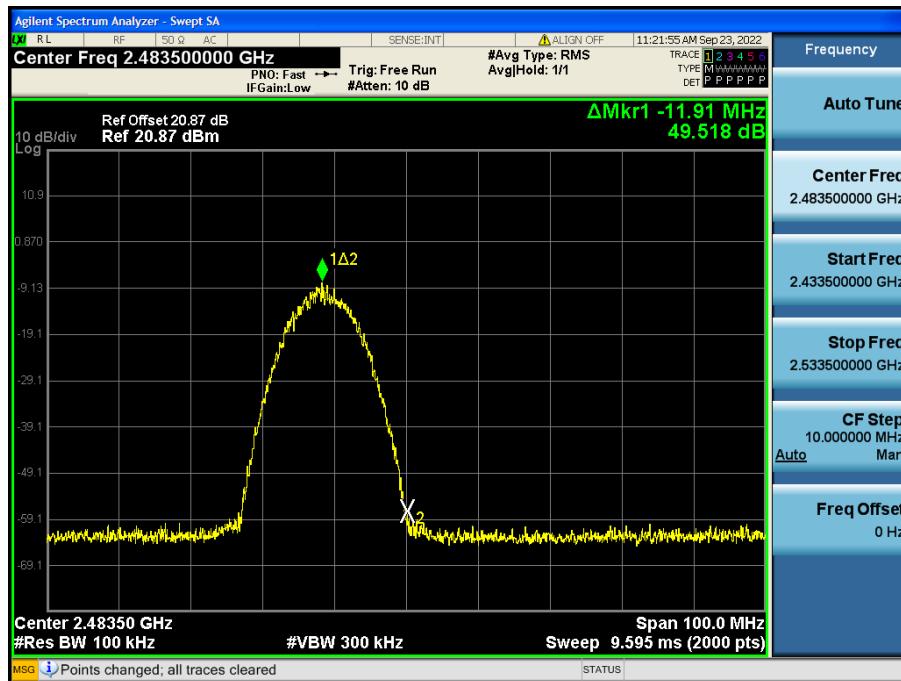


Band Edge (802.11g-CH1)

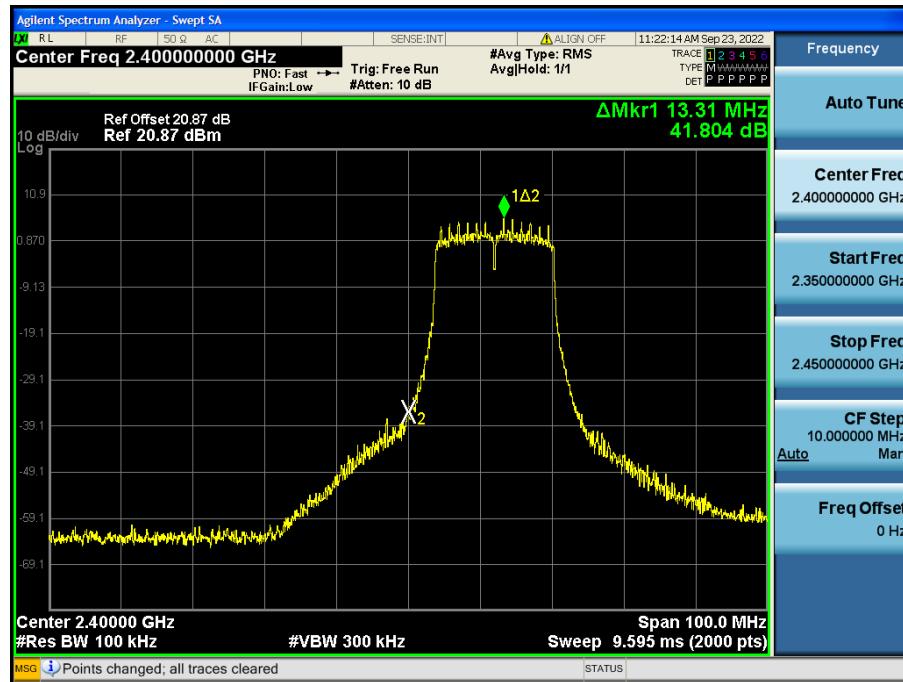


Band Edge (802.11g-CH11)

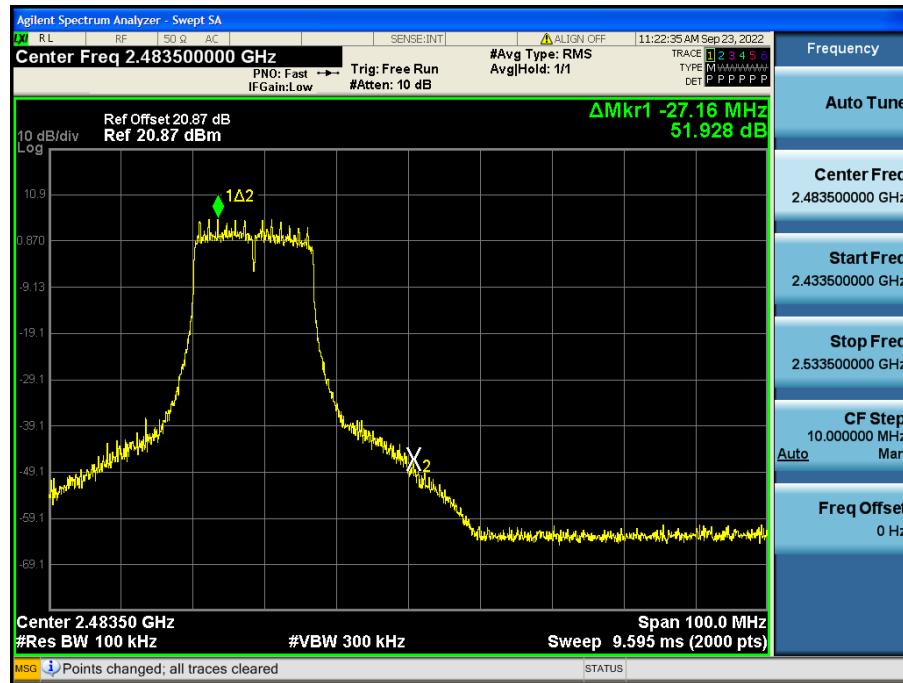


Band Edge (802.11g_CH12)

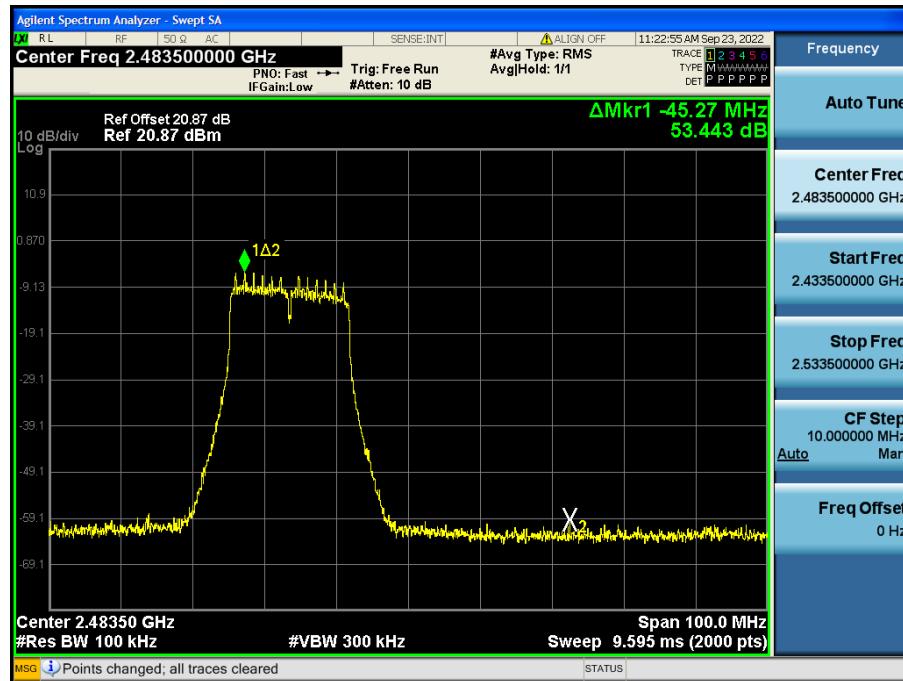


Band Edge (802.11g-CH13)

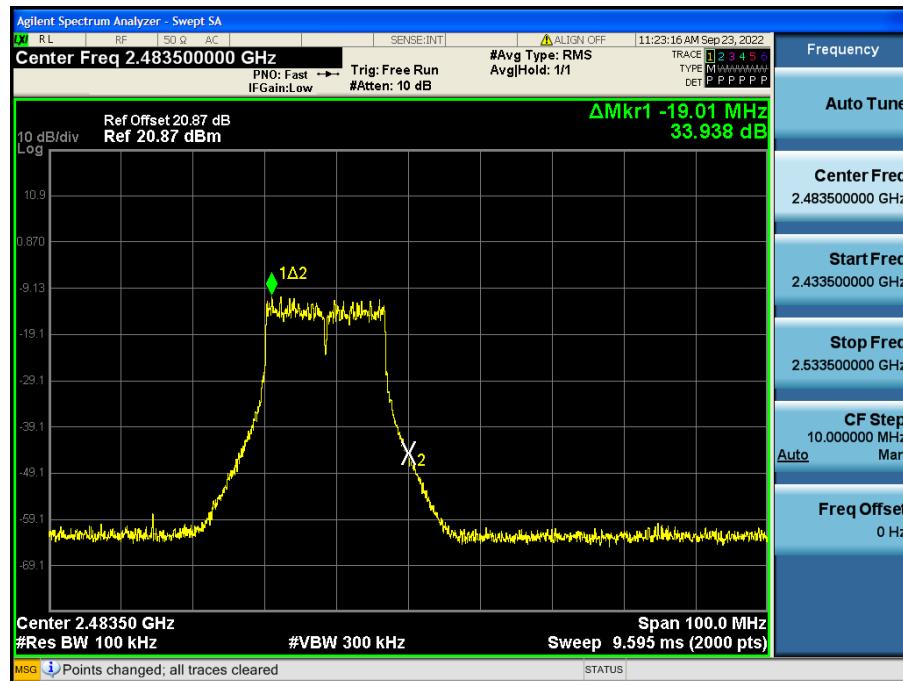


Band Edge (802.11n_HT20-CH1)

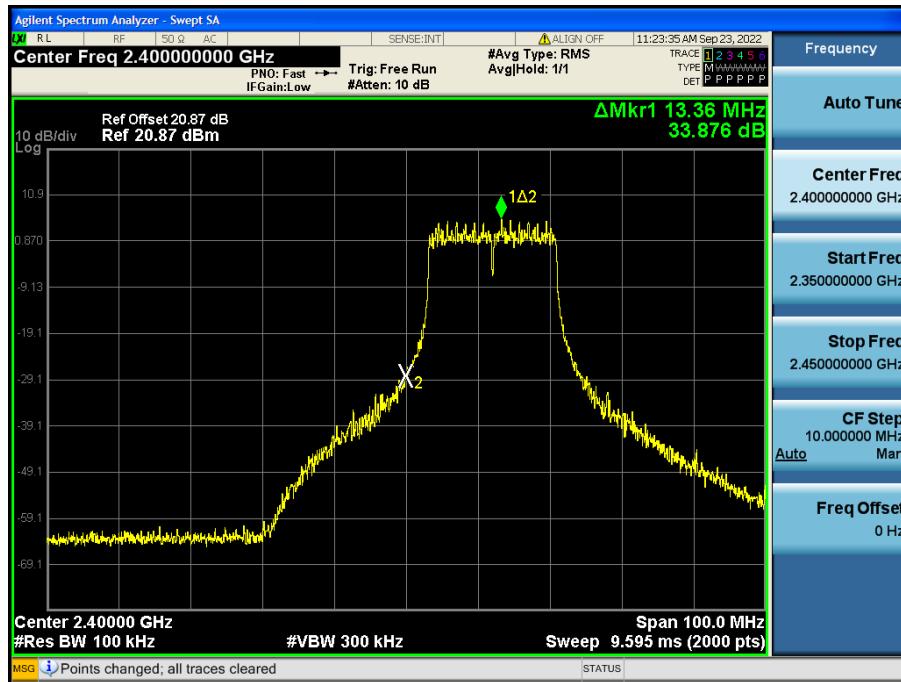


Band Edge (802.11n_HT20-CH11)

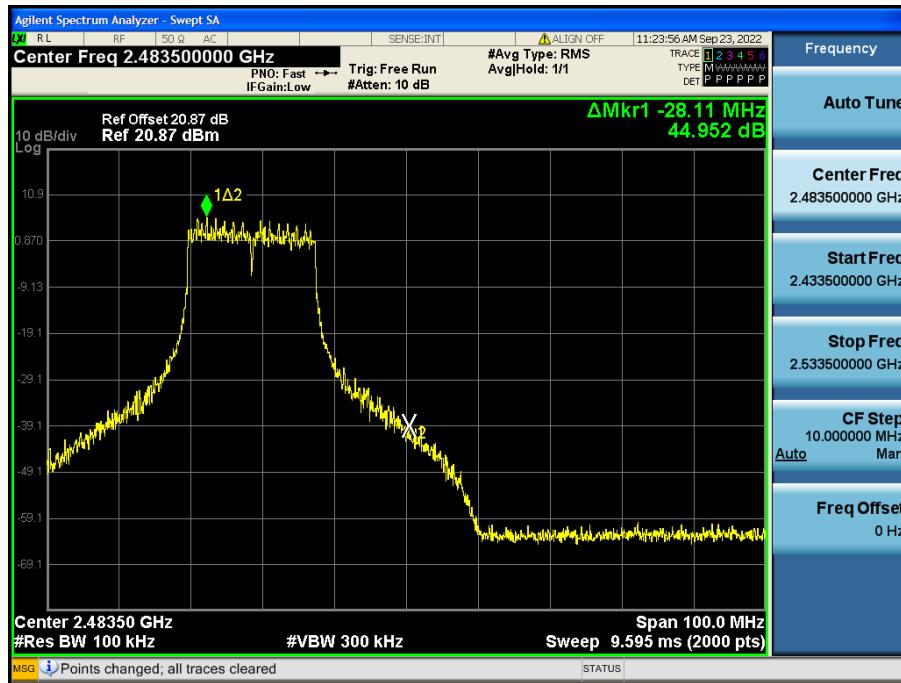

Band Edge (802.11n_HT20-CH12)

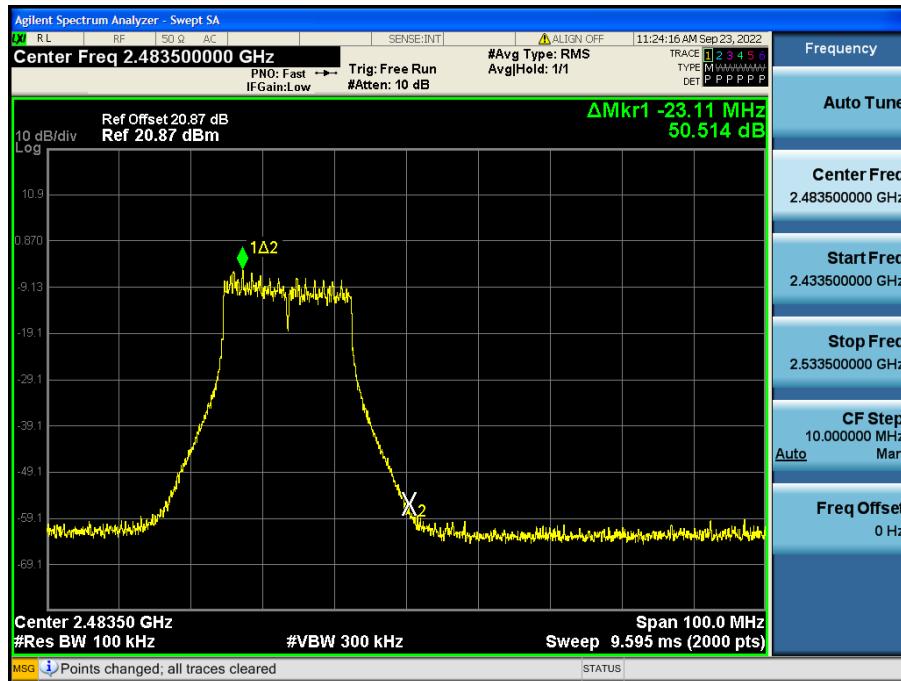

Band Edge (802.11n_HT20-CH13)

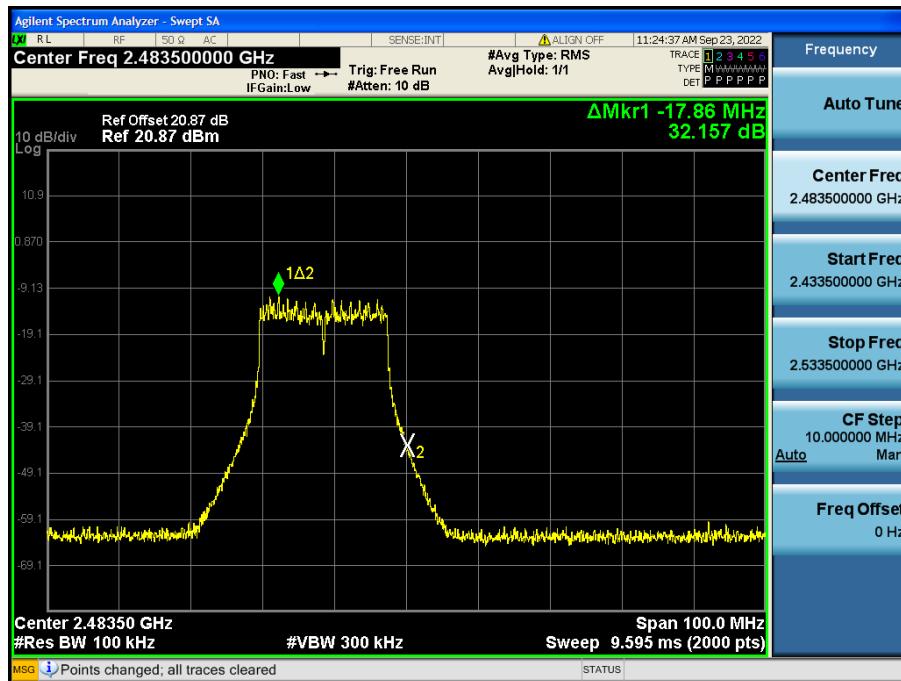


[Ant.1]

□ Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11b_Ch.1_2 Mbps)

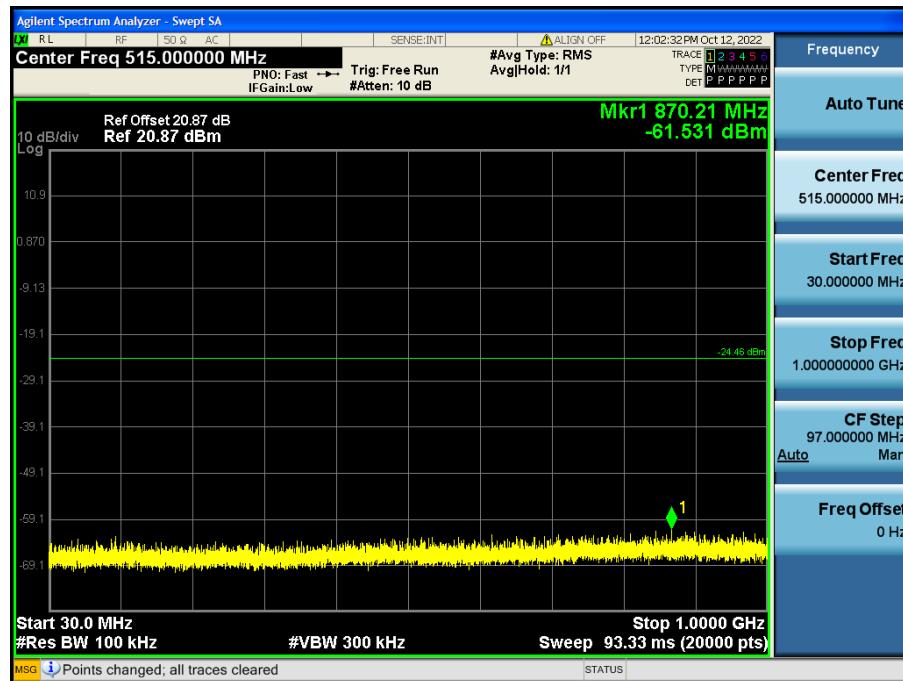


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11b_Ch.1_2 Mbps)

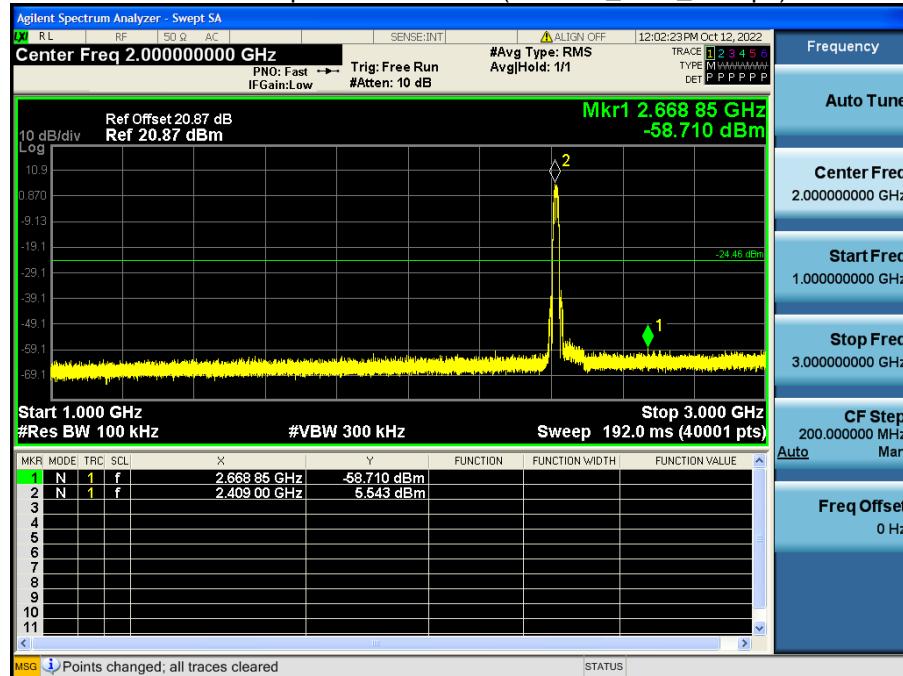


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11b_Ch.1_2 Mbps)

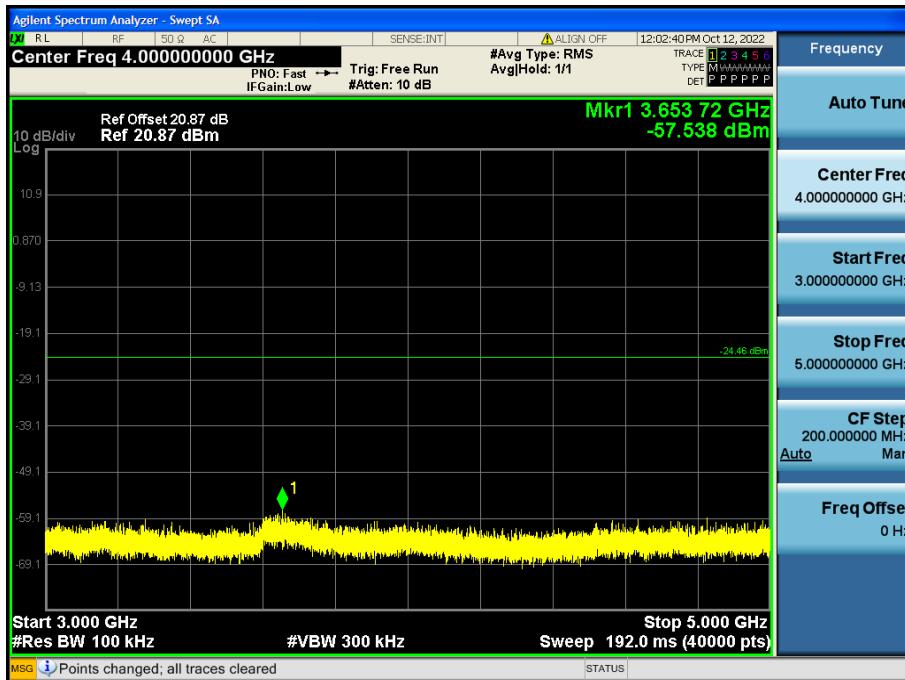


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11b_Ch.1_2 Mbps)

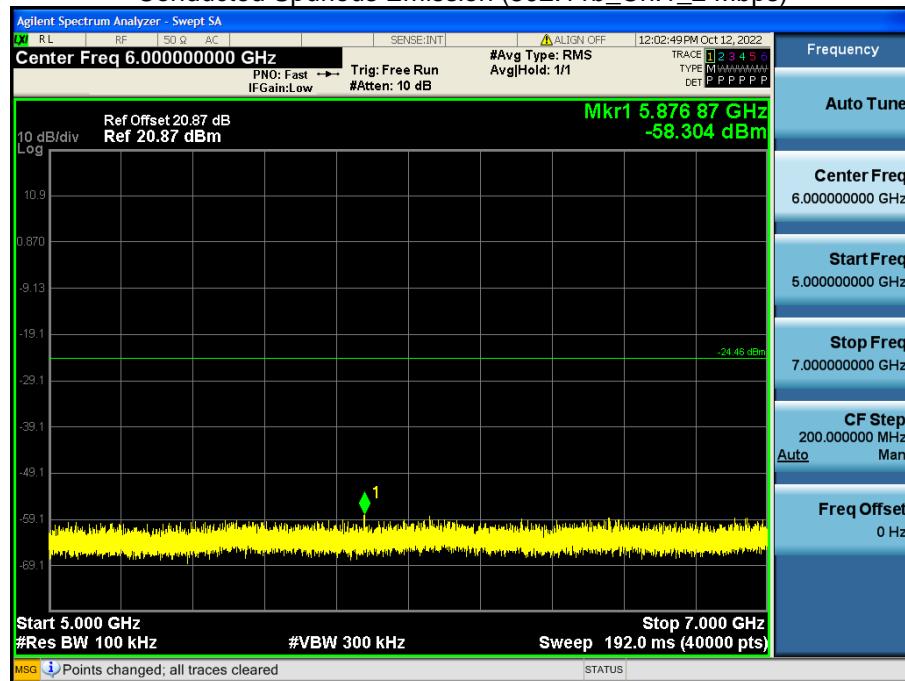


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11b_Ch.1_2 Mbps)

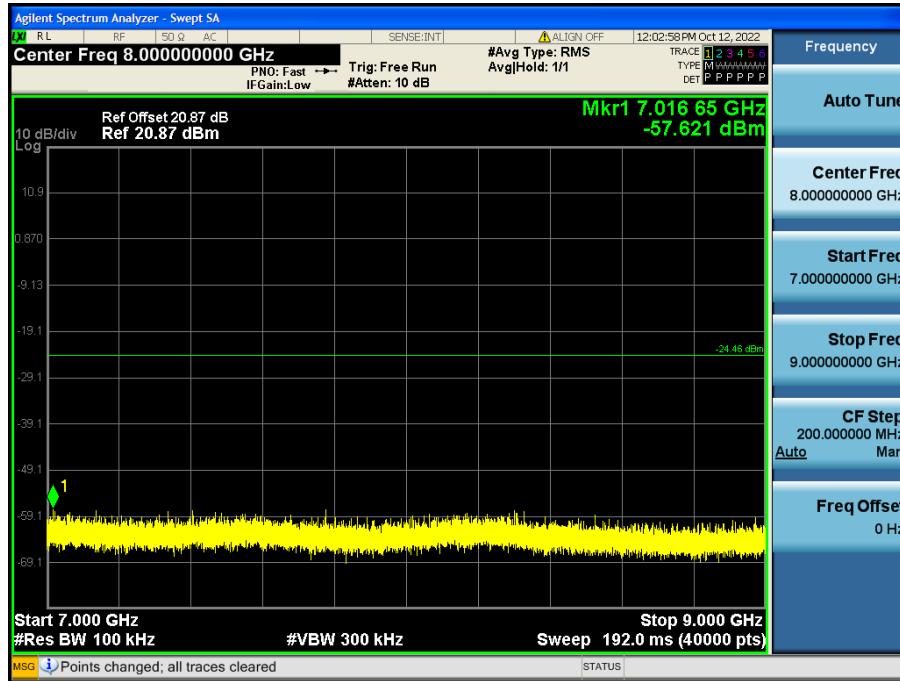


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11b_Ch.1_2 Mbps)

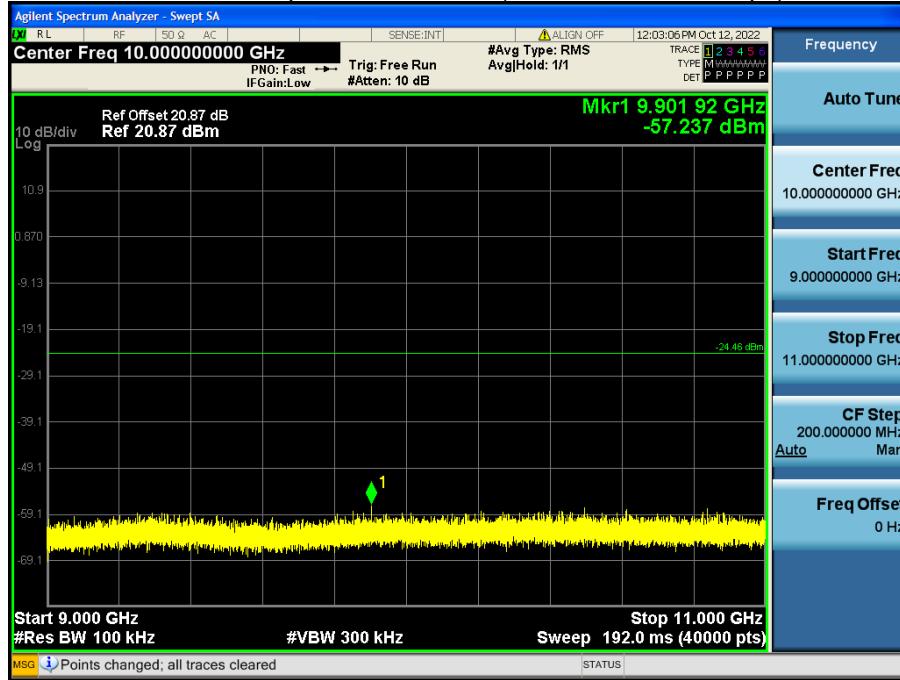


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11b_Ch.1_2 Mbps)

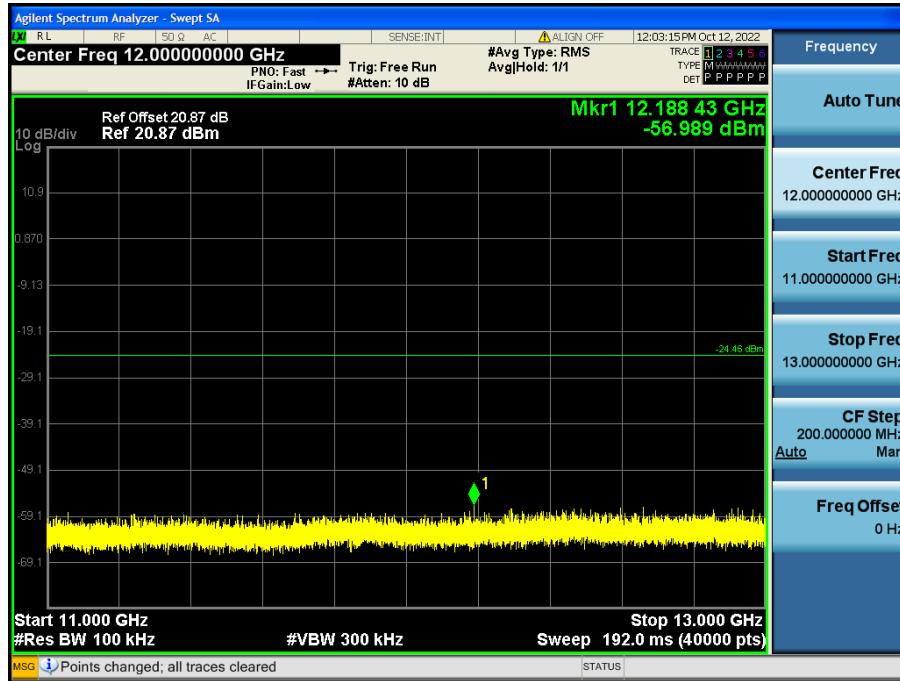


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11b_Ch.1_2 Mbps)

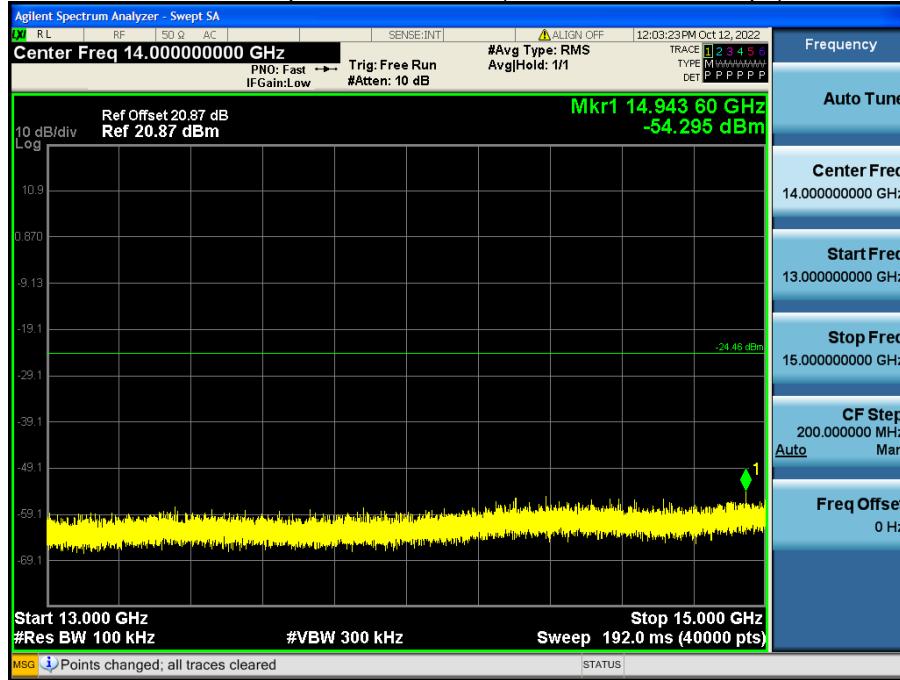


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11b_Ch.1_2 Mbps)

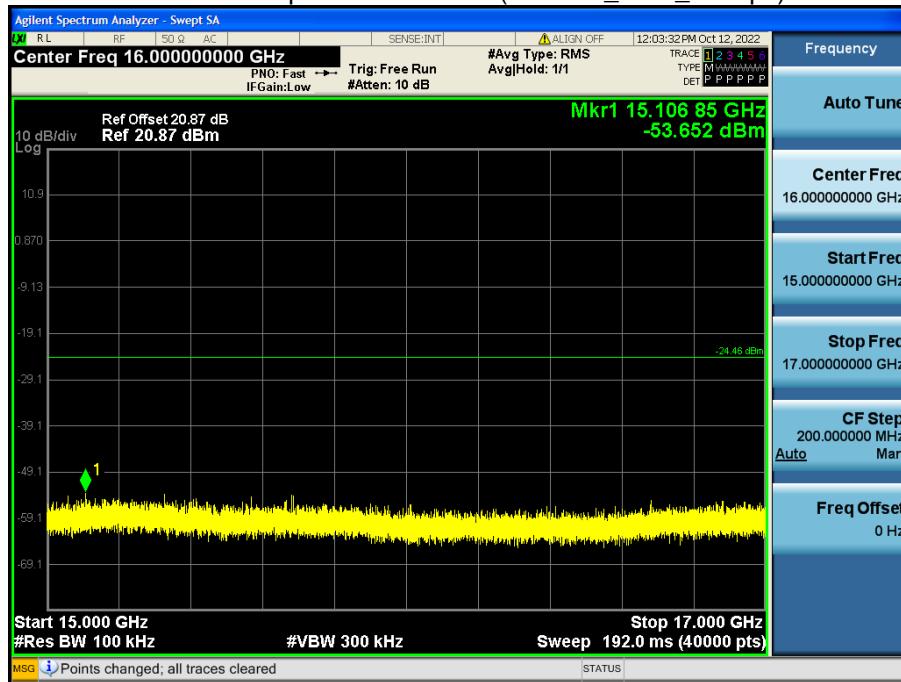


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11b_Ch.1_2 Mbps)

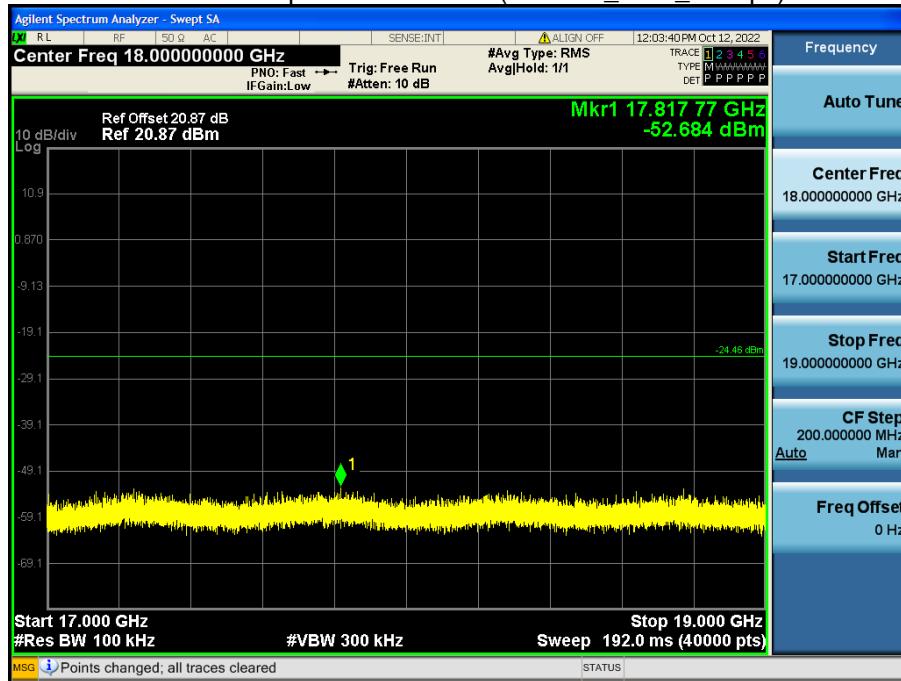


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11b_Ch.1_2 Mbps)

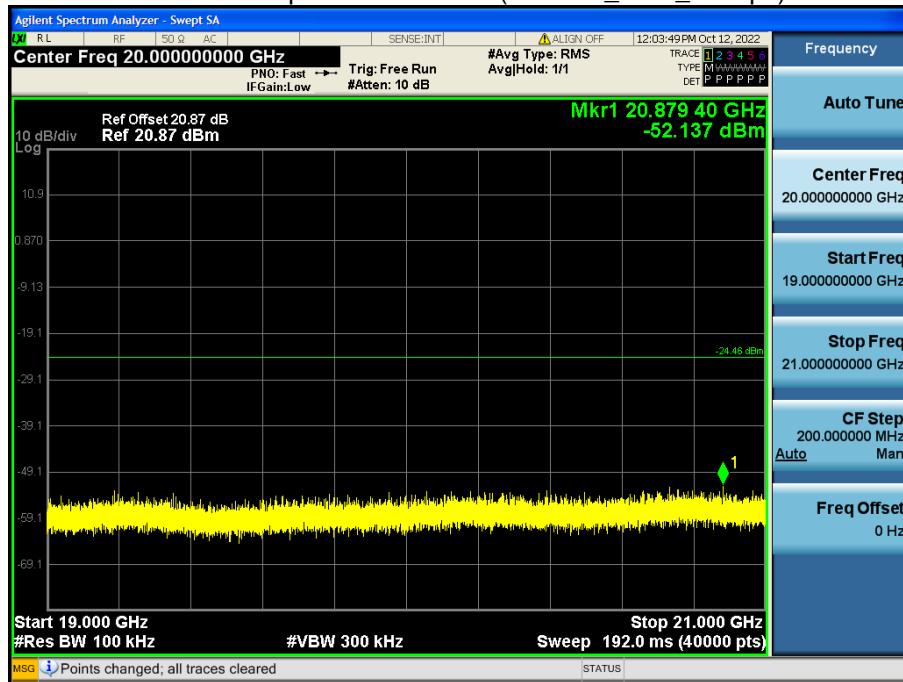


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11b_Ch.1_2 Mbps)

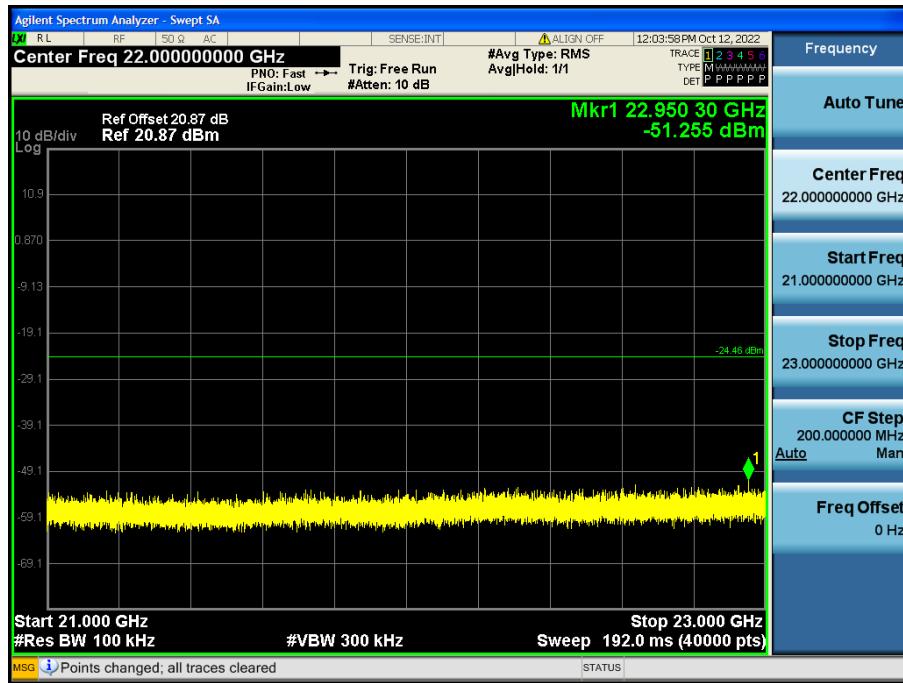

23 GHz ~ 25 GHz


Conducted Spurious Emission (802.11b_Ch.1_2 Mbps)

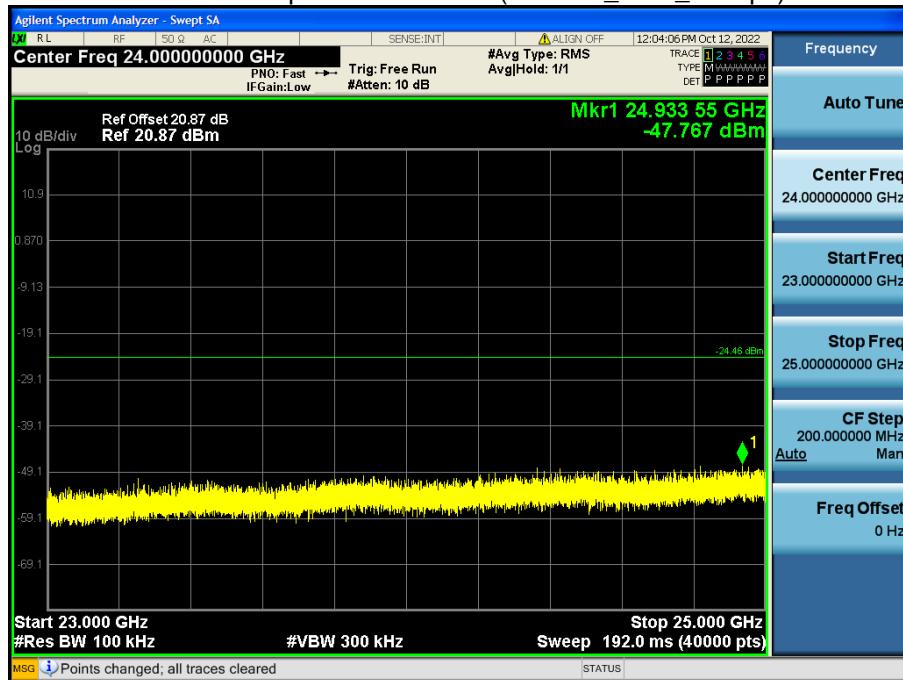

[Ant.2]**□ Test Plots(Conducted Spurious Emission)**


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11b_Ch.11_2 Mbps)

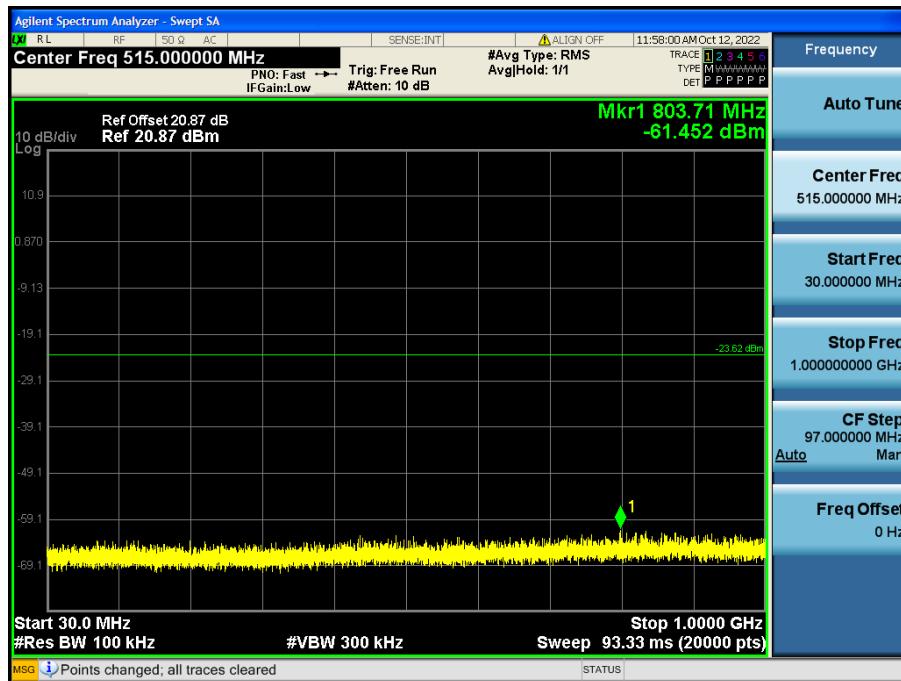


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11b_Ch.11_2 Mbps)

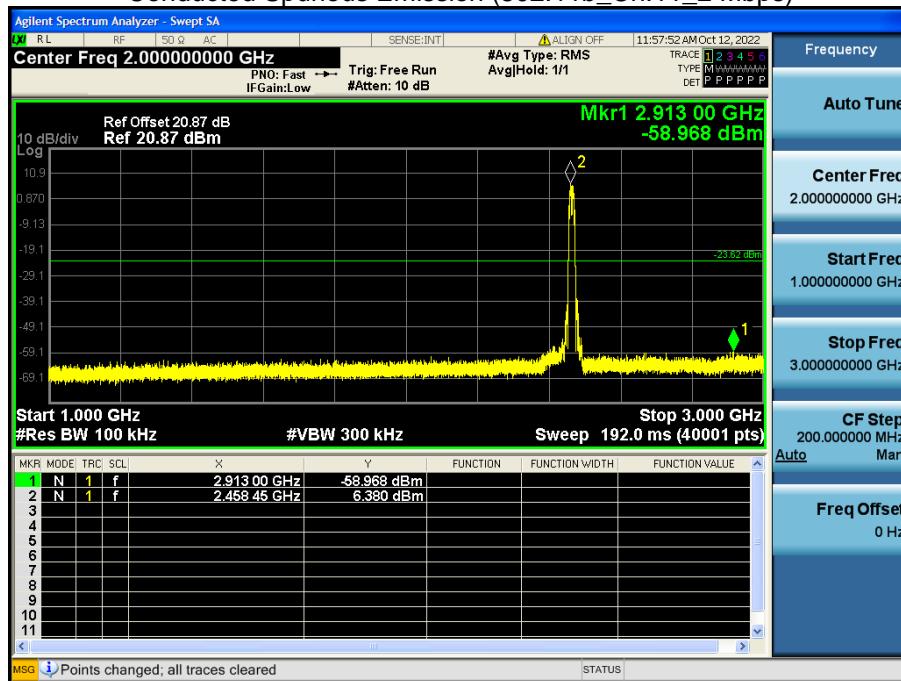


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11b_Ch.11_2 Mbps)

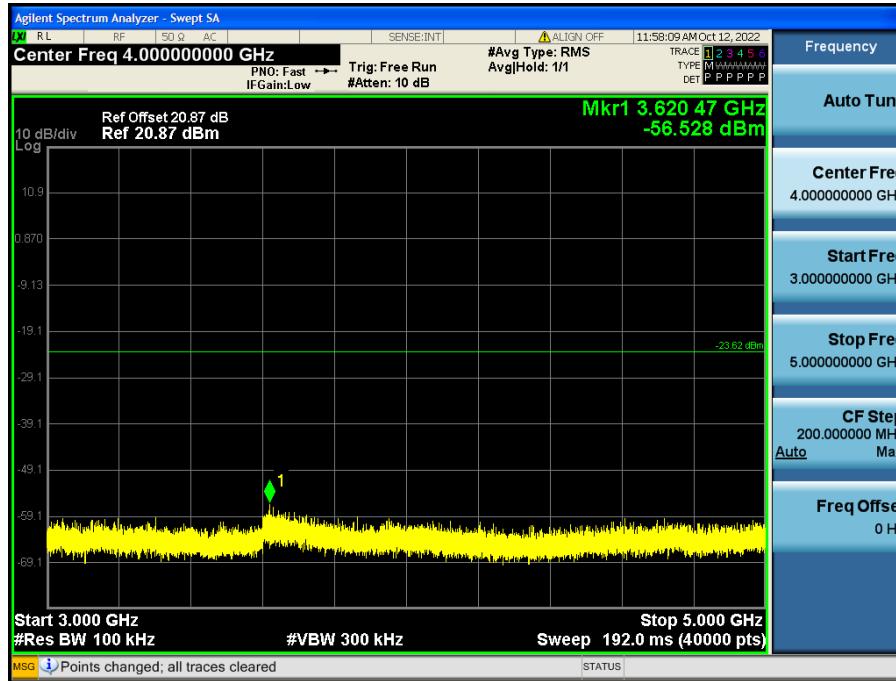


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11b_Ch.11_2 Mbps)

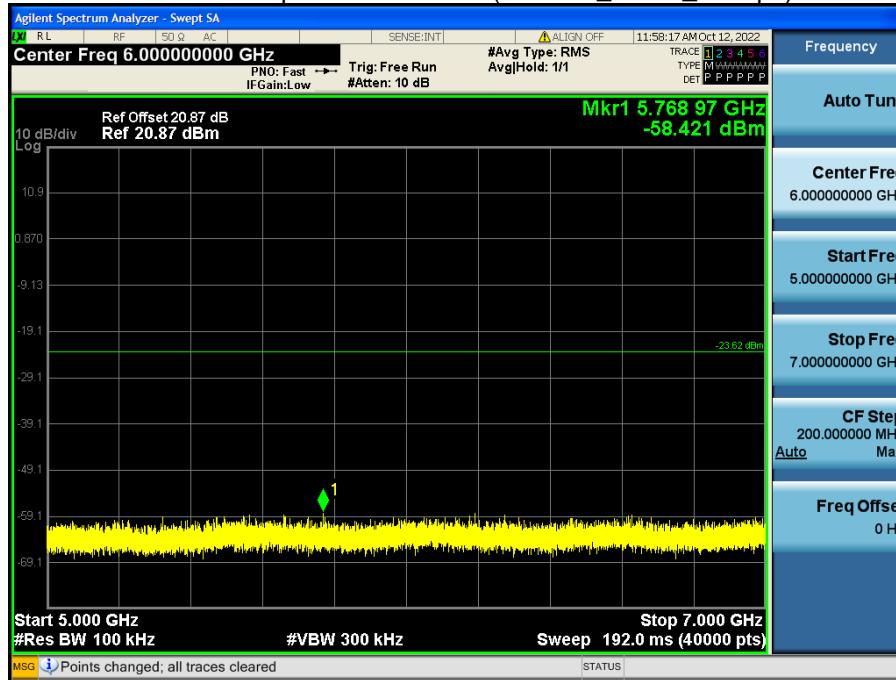


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11b_Ch.11_2 Mbps)

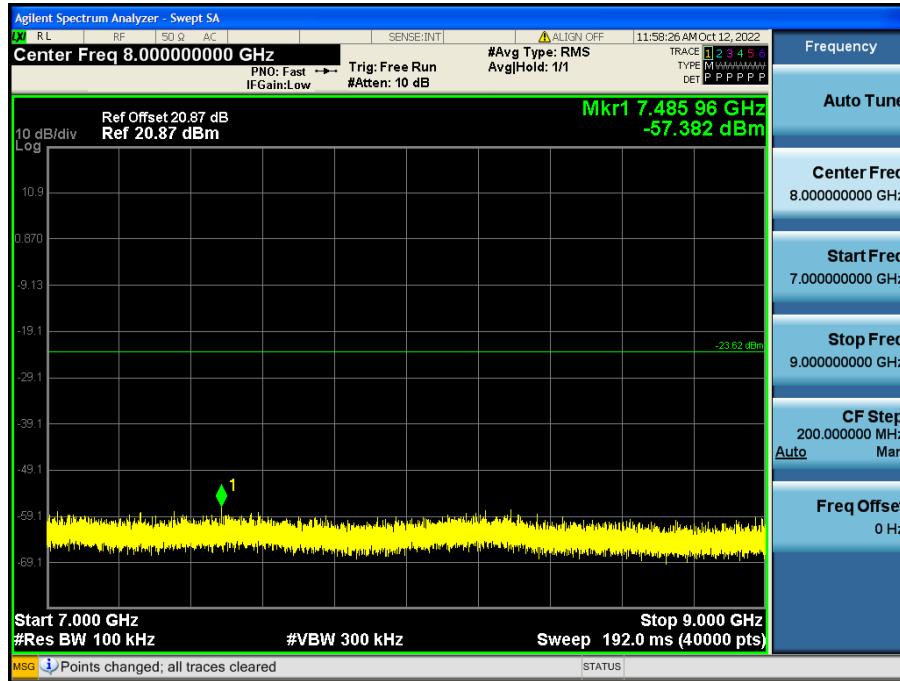


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11b_Ch.11_2 Mbps)

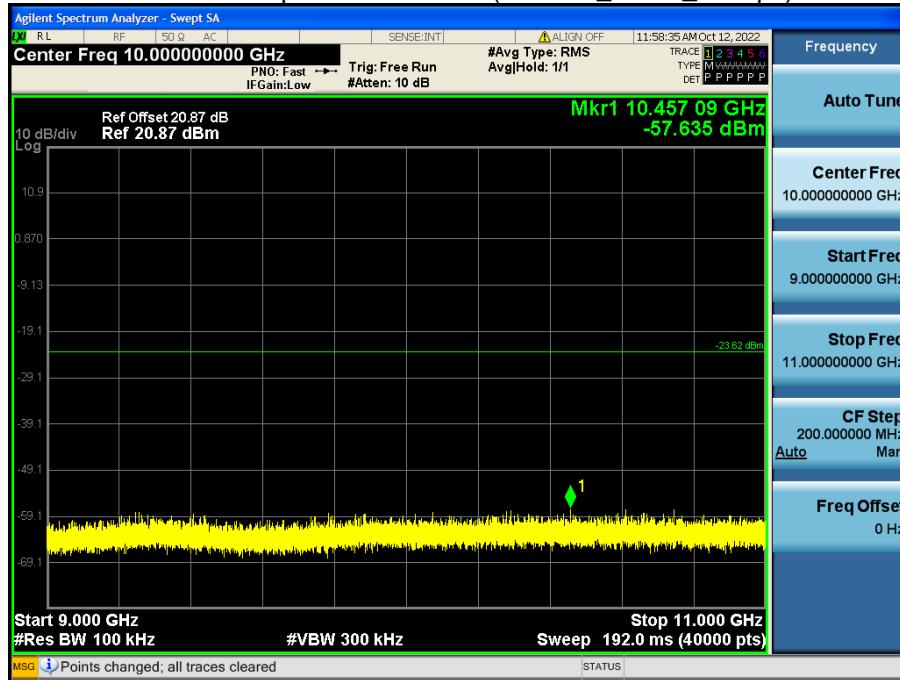


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11b_Ch.11_2 Mbps)

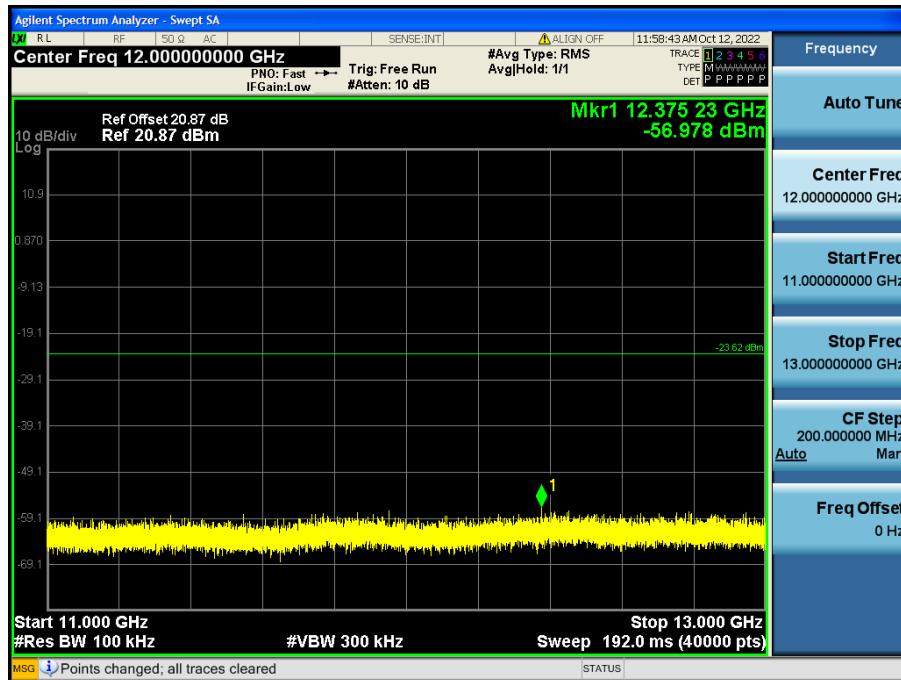


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11b_Ch.11_2 Mbps)

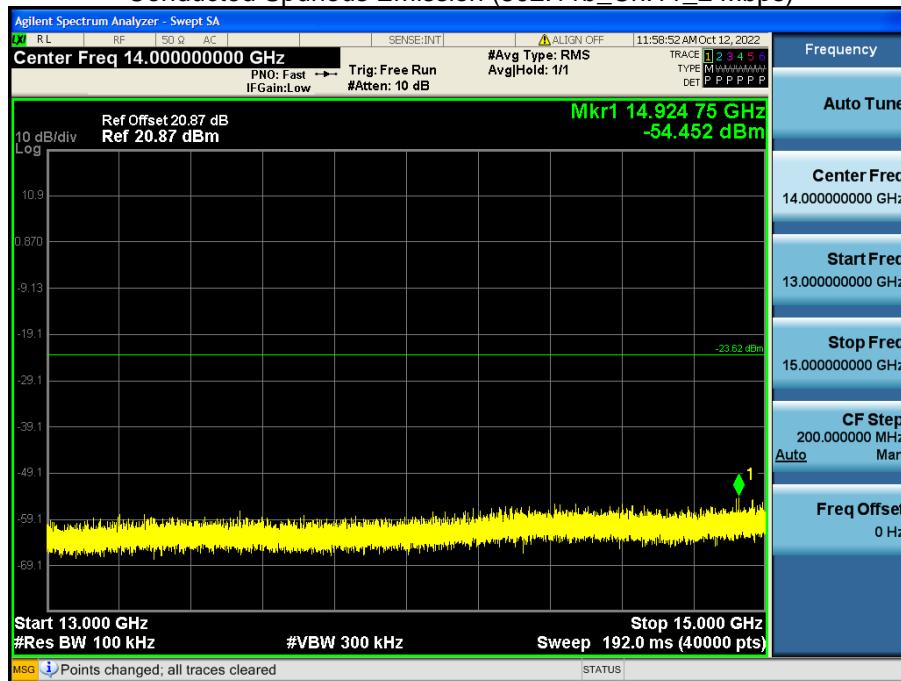


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11b_Ch.11_2 Mbps)

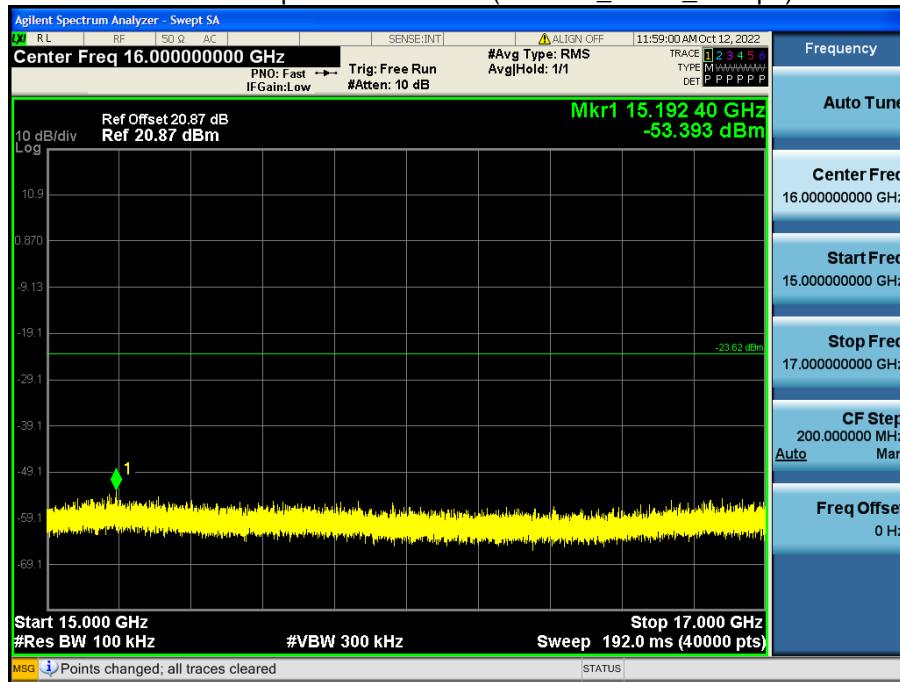


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11b_Ch.11_2 Mbps)

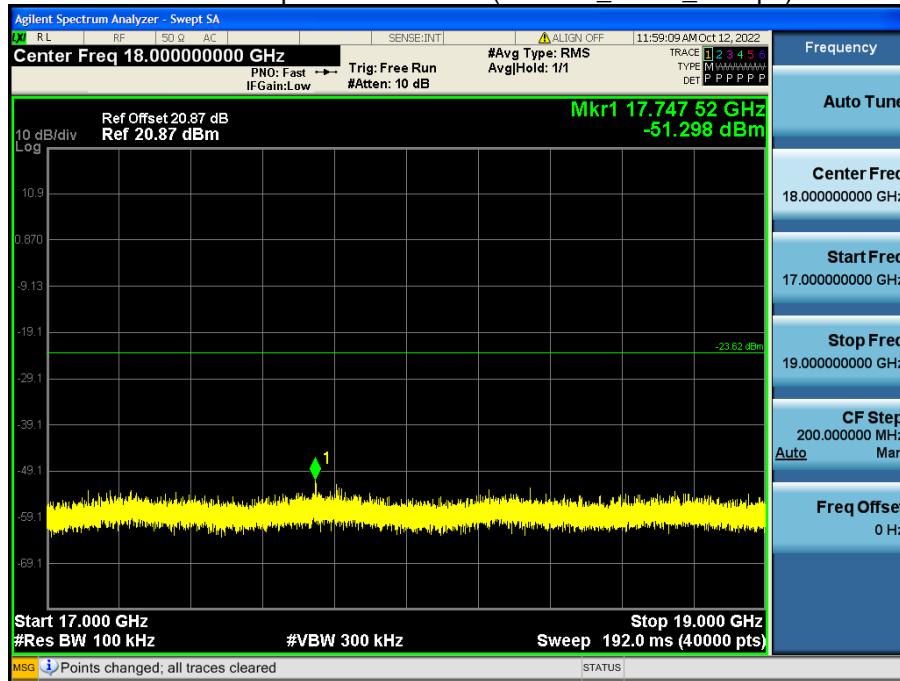


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11b_Ch.11_2 Mbps)

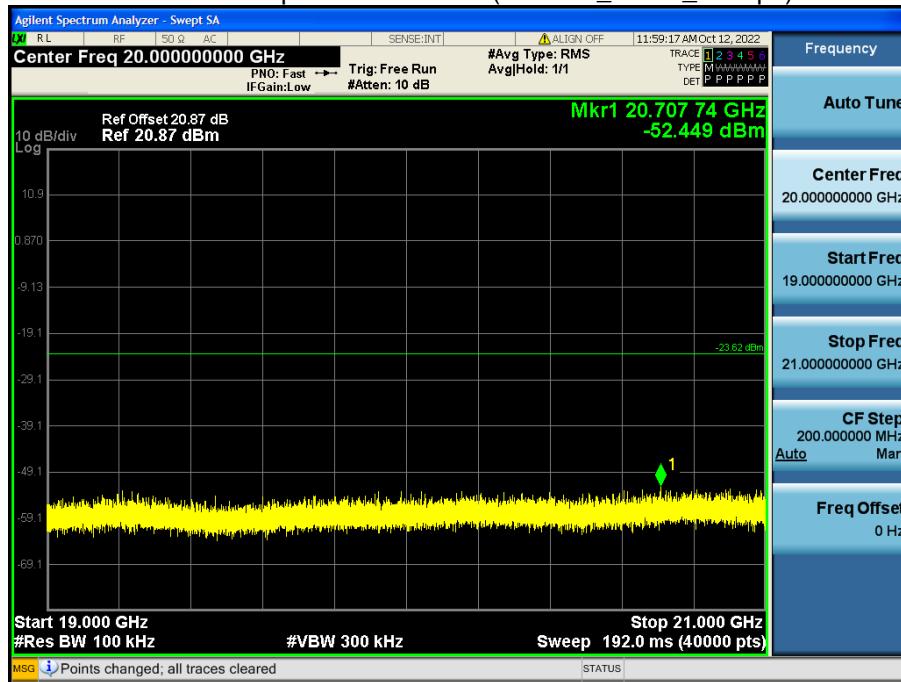


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11b_Ch.11_2 Mbps)

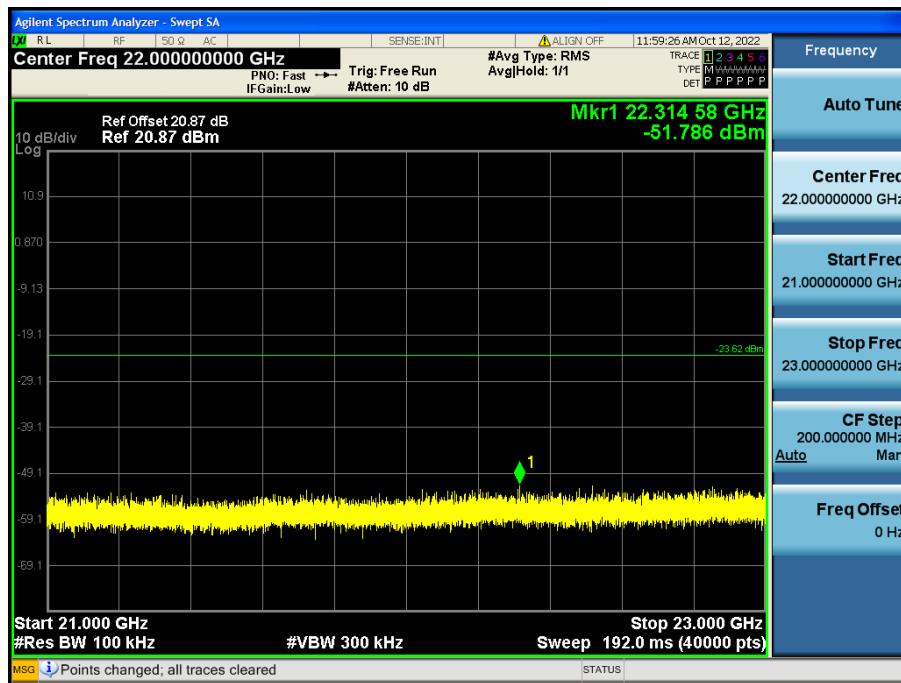

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11b_Ch.11_2 Mbps)

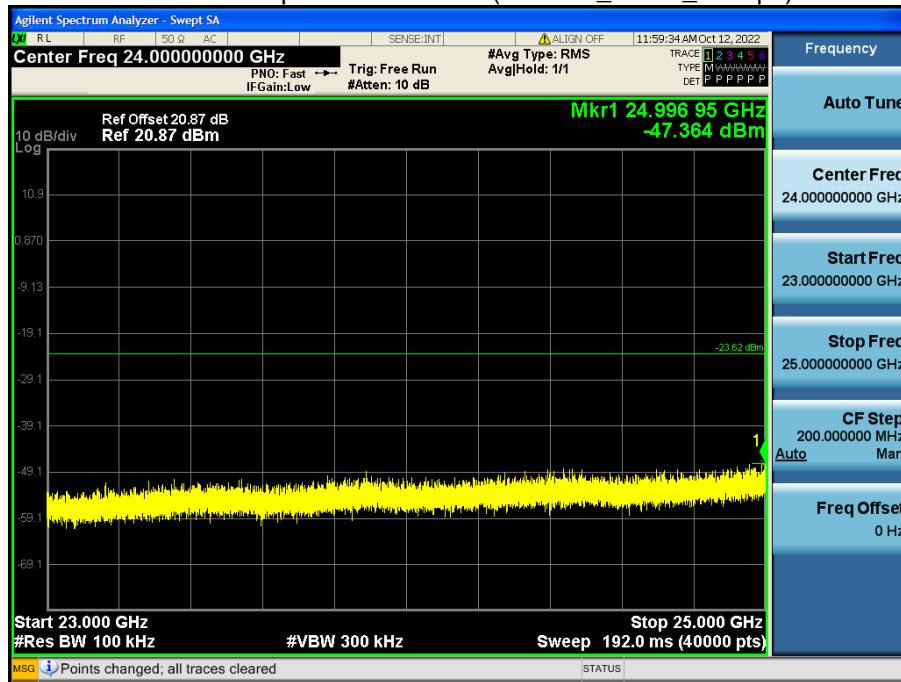

9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30 MHz

Frequency	Measured Value	A.F+C.L+D.F	Ant. POL	Total	Limit	Margin
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]
No Critical peaks found						

Note:

1. The Measured value of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dB μ V) + Distance extrapolation factor

Frequency Range : Below 1 GHz

Frequency	Measured Value	A.F+C.L	Ant. POL	Total	Limit	Margin
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]
No Critical peaks found						

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz**[Ant.1&Ant.2_MIMO(CDD)]**

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412 MHz
Channel No.	01 Ch

Frequency [MHz]	Measured Value [dB μ V/m]	A.F.+C.L.-A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4824	43.42	4.02	V	47.44	73.98	26.54	PK
4824	34.12	4.02	V	38.14	53.98	15.84	AV
7236	38.32	11.57	V	49.89	73.98	24.09	PK
7236	25.78	11.57	V	37.35	53.98	16.63	AV
4824	43.68	4.02	H	47.70	73.98	26.28	PK
4824	34.35	4.02	H	38.37	53.98	15.61	AV
7236	38.38	11.57	H	49.95	73.98	24.03	PK
7236	25.85	11.57	H	37.42	53.98	16.56	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2437 MHz
Channel No.	06 Ch

Frequency [MHz]	Measured Value [dB μ V/m]	A.F.+C.L.-A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4874	44.05	4.25	V	48.30	73.98	25.68	PK
4874	34.12	4.25	V	38.37	53.98	15.61	AV
7311	38.12	12.01	V	50.13	73.98	23.85	PK
7311	25.98	12.01	V	37.99	53.98	15.99	AV
4874	44.28	4.25	H	48.53	73.98	25.45	PK
4874	34.38	4.25	H	38.63	53.98	15.35	AV
7311	39.24	12.01	H	51.25	73.98	22.73	PK
7311	26.69	12.01	H	38.70	53.98	15.28	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2462 MHz
Channel No.	11 Ch

Frequency [MHz]	Measured Value [dB μ V/m]	A.F.+C.L.-A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4924	43.39	4.41	V	47.80	73.98	26.18	PK
4924	34.02	4.41	V	38.43	53.98	15.55	AV
7386	38.22	11.96	V	50.18	73.98	23.80	PK
7386	26.04	11.96	V	38.00	53.98	15.98	AV
4924	43.54	4.41	H	47.95	73.98	26.03	PK
4924	34.22	4.41	H	38.63	53.98	15.35	AV
7386	38.33	11.96	H	50.29	73.98	23.69	PK
7386	26.15	11.96	H	38.11	53.98	15.87	AV

Note:

Channel 12 and 13 are less powerful than channel 11 so the test for high channel was performed at channel 11.

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2412 MHz
Channel No.	01 Ch

Frequency [MHz]	Measured Value [dB μ V/m]	Duty Cycle Factor [dB]	A.F.+C.L. -A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measure ment Type
4824	41.44	0.00	4.02	V	45.46	73.98	28.52	PK
4824	29.22	0.31	4.02	V	33.55	53.98	20.44	AV
7236	38.12	0.00	11.57	V	49.69	73.98	24.29	PK
7236	25.89	0.31	11.57	V	37.77	53.98	16.22	AV
4824	41.63	0.00	4.02	H	45.65	73.98	28.33	PK
4824	29.42	0.31	4.02	H	33.75	53.98	20.24	AV
7236	38.36	0.00	11.57	H	49.93	73.98	24.05	PK
7236	25.98	0.31	11.57	H	37.86	53.98	16.13	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2437 MHz
Channel No.	06 Ch

Frequency [MHz]	Measured Value [dB μ V/m]	Duty Cycle Factor [dB]	A.F.+C.L. -A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measure ment Type
4874	41.32	0.00	4.25	V	45.57	73.98	28.41	PK
4874	29.69	0.31	4.25	V	34.25	53.98	19.74	AV
7311	38.33	0.00	12.01	V	50.34	73.98	23.64	PK
7311	25.89	0.31	12.01	V	38.21	53.98	15.78	AV
4874	41.45	0.00	4.25	H	45.70	73.98	28.28	PK
4874	29.85	0.31	4.25	H	34.41	53.98	19.58	AV
7311	38.42	0.00	12.01	H	50.43	73.98	23.55	PK
7311	25.95	0.31	12.01	H	38.27	53.98	15.72	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2462 MHz
Channel No.	11 Ch

Frequency [MHz]	Measured Value [dB μ V/m]	Duty Cycle Factor [dB]	A.F.+C.L. -A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measure ment Type
4924	41.39	0.00	4.41	V	45.80	73.98	28.18	PK
4924	29.51	0.31	4.41	V	34.23	53.98	19.76	AV
7386	38.51	0.00	11.96	V	50.47	73.98	23.51	PK
7386	25.87	0.31	11.96	V	38.14	53.98	15.85	AV
4924	41.51	0.00	4.41	H	45.92	73.98	28.06	PK
4924	29.65	0.31	4.41	H	34.37	53.98	19.62	AV
7386	38.55	0.00	11.96	H	50.51	73.98	23.47	PK
7386	25.93	0.31	11.96	H	38.20	53.98	15.79	AV

Note:

Channel 12 and 13 are less powerful than channel 11 so the test for high channel was performed at channel 11.

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2412 MHz
Channel No.	01 Ch

Frequency [MHz]	Measured Value [dB μ V]	Duty Cycle Factor [dB]	A.F.+C.L.- A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measure ment Type
4824	41.39	0.00	4.02	V	45.41	73.98	28.57	PK
4824	29.12	0.36	4.02	V	33.50	53.98	20.48	AV
7236	38.22	0.00	11.57	V	49.79	73.98	24.19	PK
7236	25.71	0.36	11.57	V	37.64	53.98	16.34	AV
4824	41.55	0.00	4.02	H	45.57	73.98	28.41	PK
4824	29.35	0.36	4.02	H	33.73	53.98	20.25	AV
7236	38.41	0.00	11.57	H	49.98	73.98	24.00	PK
7236	25.88	0.36	11.57	H	37.81	53.98	16.17	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2437 MHz
Channel No.	06 Ch

Frequency [MHz]	Measured Value [dB μ V]	Duty Cycle Factor [dB]	A.F.+C.L.- A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measure ment Type
4874	41.59	0.00	4.25	V	45.84	73.98	28.14	PK
4874	29.72	0.36	4.25	V	34.33	53.98	19.65	AV
7311	38.45	0.00	12.01	V	50.46	73.98	23.52	PK
7311	25.89	0.36	12.01	V	38.26	53.98	15.72	AV
4874	41.71	0.00	4.25	H	45.96	73.98	28.02	PK
4874	29.84	0.36	4.25	H	34.45	53.98	19.53	AV
7311	38.55	0.00	12.01	H	50.56	73.98	23.42	PK
7311	25.99	0.36	12.01	H	38.36	53.98	15.62	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2462 MHz
Channel No.	11 Ch

Frequency [MHz]	Measured Value [dB μ V]	Duty Cycle Factor [dB]	A.F.+C.L.- A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measure ment Type
4924	41.56	0.00	4.41	V	45.97	73.98	28.01	PK
4924	29.41	0.36	4.41	V	34.18	53.98	19.80	AV
7386	38.22	0.00	11.96	V	50.18	73.98	23.80	PK
7386	25.88	0.36	11.96	V	38.20	53.98	15.78	AV
4924	41.62	0.00	4.41	H	46.03	73.98	27.95	PK
4924	29.58	0.36	4.41	H	34.35	53.98	19.63	AV
7386	38.39	0.00	11.96	H	50.35	73.98	23.63	PK
7386	25.94	0.36	11.96	H	38.26	53.98	15.72	AV


Note:

Channel 12 and 13 are less powerful than channel 11 so the test for high channel was performed at channel 11.


[Ant.1&Ant.2_MIMO(CDD)]

Test Plots (Worst case : Y-H)

Radiated Spurious Emissions plot – Average Result (802.11b_1 Mbps, Ch.6 3rd Harmonic)

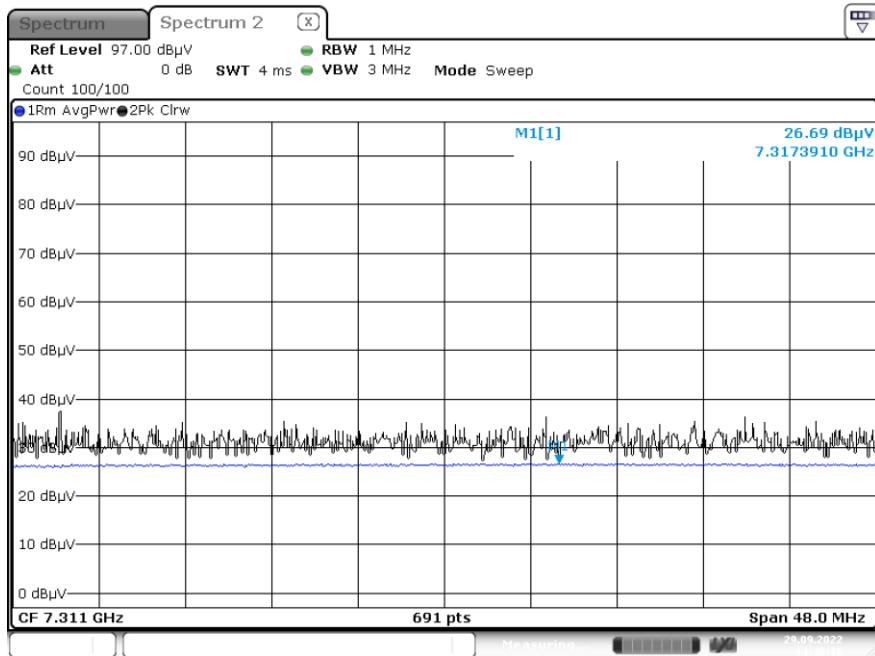

Radiated Spurious Emissions plot – Peak Result (802.11b_1 Mbps, Ch.6 3rd Harmonic)

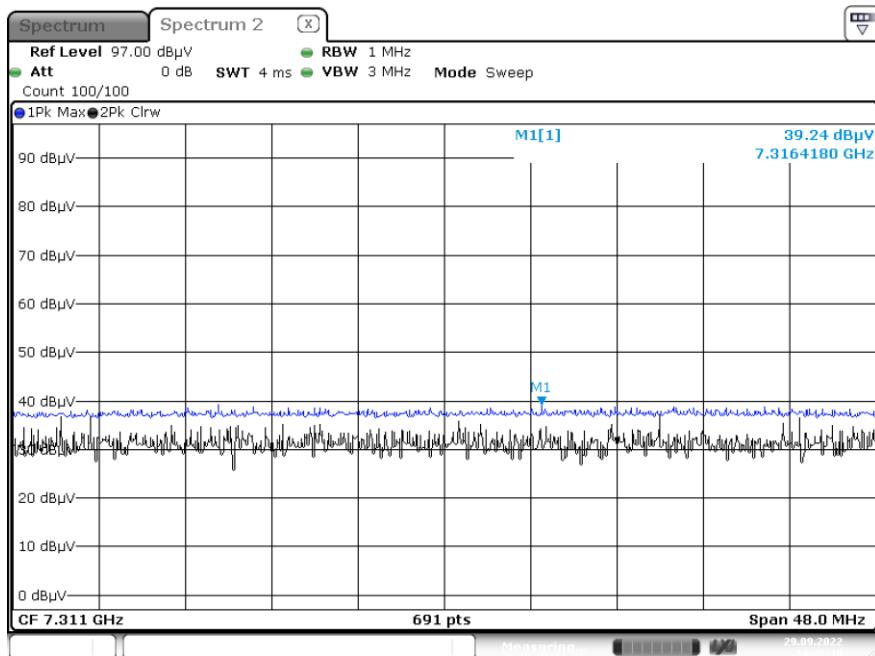

Note: Plot of worst case are only reported.

9.7 RADIATED RESTRICTED BAND EDGES

[Ant.1&Ant.2_MIMO(CDD)]

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Measured Value [dB μ V]	A.F+C.L-A.G+ ATT+D.F [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
2390.0	21.638	37.05	H	58.69	73.98	15.29	PK
2390.0	12.595	37.05	H	49.65	53.98	4.34	AV
2390.0	21.485	37.05	V	58.54	73.98	15.45	PK
2390.0	12.329	37.05	V	49.38	53.98	4.60	AV
2483.5	21.699	37.03	H	58.73	73.98	15.25	PK
2483.5	12.852	37.03	H	49.88	53.98	4.10	AV
2483.5	21.359	37.03	V	58.39	73.98	15.59	PK
2483.5	12.652	37.03	V	49.68	53.98	4.30	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2467 MHz, 2472 MHz
Channel No.	12 Ch, 13 Ch

Frequency [MHz]	Measured Value [dB μ V]	A.F+C.L-A.G+ ATT+D.F [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
2483.5	17.999	37.03	H	55.03	73.98	18.95	PK
2483.5	7.144	37.03	H	44.17	53.98	9.81	AV
2483.5	17.521	37.03	V	54.55	73.98	19.43	PK
2483.5	6.985	37.03	V	44.02	53.98	9.97	AV
2483.5	16.555	37.03	H	53.59	73.98	20.40	PK
2483.5	5.298	37.03	H	42.33	53.98	11.65	AV
2483.5	16.263	37.03	V	53.29	73.98	20.69	PK
2483.5	5.025	37.03	V	42.06	53.98	11.93	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Measured Value [dB μ V]	Duty Cycle Factor [dB]	A.F+C.L-A.G+ ATT+D.F [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
2390.0	29.550	0.000	37.05	H	66.60	73.98	7.38	PK
#2389.5	12.550	0.305	37.05	H	49.91	53.98	4.08	AV
2389.0	13.281	0.305	37.05	H	50.64	53.98	3.34	AV
2390.0	29.222	0.000	37.05	V	66.27	73.98	7.71	PK
#2389.5	12.325	0.305	37.05	V	49.68	53.98	4.30	AV
2389.0	13.025	0.305	37.05	V	50.38	53.98	3.60	AV
2483.5	28.989	0.000	37.03	H	66.02	73.98	7.96	PK
#2484	13.270	0.305	37.03	H	50.61	53.98	3.37	AV
2484.5	13.452	0.305	37.03	H	50.79	53.98	3.19	AV
2483.5	28.596	0.000	37.03	V	65.63	73.98	8.35	PK
#2484	13.025	0.305	37.03	V	50.36	53.98	3.62	AV
2484.5	13.125	0.305	37.03	V	50.46	53.98	3.52	AV

Note : Integration method Used (ANSI C63.10 Section11.13.3)

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2467 MHz, 2472 MHz
Channel No.	12 Ch, 13 Ch

Frequency [MHz]	Measured Value [dB μ V]	Duty Cycle Factor [dB]	A.F+C.L- A.G+ ATT+D.F [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measure ment Type
2483.5	18.521	0.000	37.03	H	55.55	73.98	18.43	PK
2483.5	7.050	0.305	37.03	H	44.39	53.98	9.60	AV
2483.5	18.159	0.000	37.03	V	55.19	73.98	18.79	PK
2483.5	6.895	0.305	37.03	V	44.23	53.98	9.75	AV
2483.5	20.489	0.000	37.03	H	57.52	73.98	16.46	PK
2483.5	7.586	0.305	37.03	H	44.92	53.98	9.06	AV
2483.5	20.222	0.000	37.03	V	57.25	73.98	16.73	PK
2483.5	7.125	0.305	37.03	V	44.46	53.98	9.52	AV

Operation Mode:	802.11n (HT20)
Transfer Rate:	0
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L-A.G+ ATT+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	26.989	0.000	37.05	H	64.04	73.98	9.94	PK
#2389.5	11.860	0.356	37.05	H	49.27	53.98	4.71	AV
2389.0	12.965	0.356	37.05	H	50.37	53.98	3.61	AV
2390.0	26.612	0.000	37.05	V	63.66	73.98	10.32	PK
#2389.5	11.697	0.356	37.05	V	49.10	53.98	4.88	AV
2389.0	12.598	0.356	37.05	V	50.00	53.98	3.98	AV
2483.5	27.907	0.000	37.03	H	64.94	73.98	9.04	PK
#2484	13.420	0.356	37.03	H	50.81	53.98	3.17	AV
#2485	11.990	0.356	37.03	H	49.38	53.98	4.60	AV
2485.5	12.793	0.356	37.03	H	50.18	53.98	3.80	AV
2483.5	27.652	0.000	37.03	V	64.68	73.98	9.30	PK
#2484	13.222	0.356	37.03	V	50.61	53.98	3.37	AV
#2485	11.698	0.356	37.03	V	49.08	53.98	4.90	AV
2485.5	12.521	0.356	37.03	V	49.91	53.98	4.07	AV

Note : Integration method Used (ANSI C63.10 Section11.13.3)

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2467 MHz, 2472 MHz
Channel No.	12 Ch, 13 Ch


Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor [dB]	A.F+C.L-A.G+ ATT+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	18.352	0.000	37.03	H	55.38	73.98	18.60	PK
2483.5	7.159	0.356	37.03	H	44.55	53.98	9.44	AV
2483.5	18.125	0.000	37.03	V	55.16	73.98	18.83	PK
2483.5	6.896	0.356	37.03	V	44.28	53.98	9.70	AV
2483.5	23.073	0.000	37.03	H	60.10	73.98	13.88	PK
2483.5	9.093	0.356	37.03	H	46.48	53.98	7.50	AV
2483.5	22.985	0.000	37.03	V	60.02	73.98	13.97	PK
2483.5	8.885	0.356	37.03	V	46.27	53.98	7.71	AV

█ Test Plots

[Ant.1&Ant.2_MIMO(CDD)] (Worst case : X-H)

Radiated Restricted Band Edges plot – Average Result (802.11n (HT20)_ MCS0, Ch.11)

Integration method Used_ 2 484 MHz

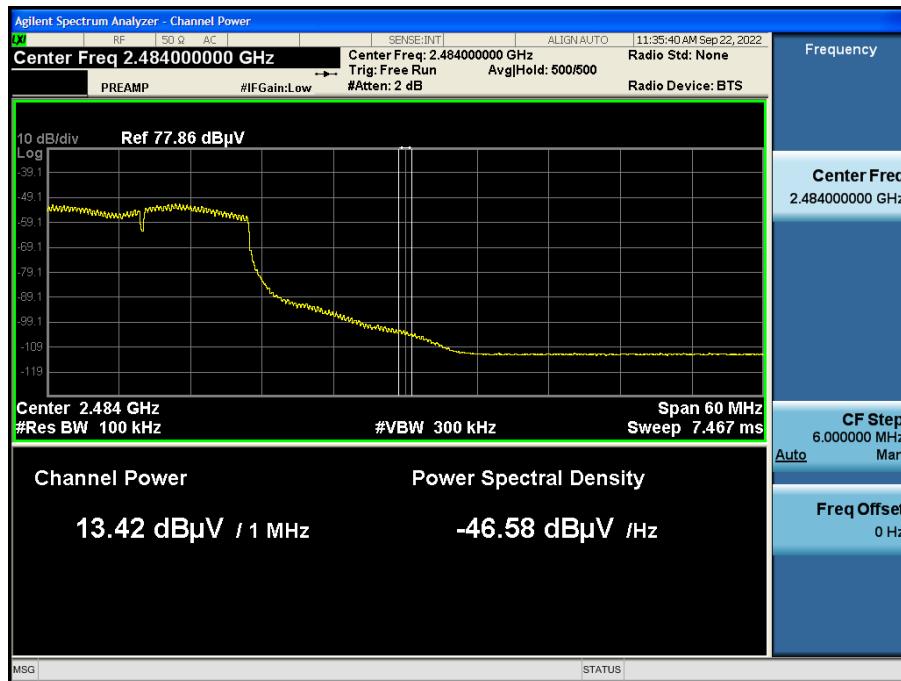

Radiated Restricted Band Edges plot – Average Result (802.11n (HT20)_ MCS0, Ch.11)

Integration method Used_ 2 485 MHz



Radiated Restricted Band Edges plot – Average Result (802.11n (HT20)_ MCS0, Ch.11)



Radiated Restricted Band Edges plot – Peak Result (802.11n (HT20)_ MCS0, Ch.11)

**Note:**

Plot of worst case are only reported.

9.8 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions (Line 1)

2.4G MODE_L1


1 / 2

Test Report

Common Information

EUT : SM-S911B/DS
 Manufacturer : SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions : WLAN 2.4G MODE_L1

Full Spectrum

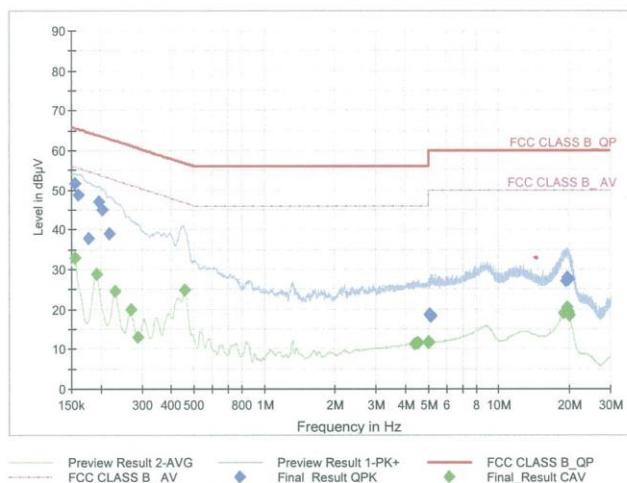

Final Result QPK

Frequency (MHz)	QuasiPeak (dB μ V)	Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	51.72	65.75	14.04	9.000	L1	OFF	9.7
0.1613	48.71	65.40	16.69	9.000	L1	OFF	9.7
0.1770	37.72	64.63	26.91	9.000	L1	OFF	9.7
0.1973	47.04	63.73	16.68	9.000	L1	OFF	9.7
0.2040	44.96	63.45	18.49	9.000	L1	OFF	9.7
0.2175	39.06	62.91	23.86	9.000	L1	OFF	9.7
5.0653	18.62	60.00	41.38	9.000	L1	OFF	9.9
5.0855	18.40	60.00	41.60	9.000	L1	OFF	9.9
5.1080	18.35	60.00	41.65	9.000	L1	OFF	9.9
5.1170	18.09	60.00	41.91	9.000	L1	OFF	9.9
5.1373	18.35	60.00	41.65	9.000	L1	OFF	9.9
5.1575	18.31	60.00	41.69	9.000	L1	OFF	9.9
19.2380	27.22	60.00	32.78	9.000	L1	OFF	10.3
19.4968	27.50	60.00	32.50	9.000	L1	OFF	10.3
19.5148	27.90	60.00	32.10	9.000	L1	OFF	10.3
19.5238	27.86	60.00	32.14	9.000	L1	OFF	10.3
19.5733	27.33	60.00	32.67	9.000	L1	OFF	10.3
19.7330	27.26	60.00	32.74	9.000	L1	OFF	10.4

2022-09-28

오후 1:26:13

2.4G MODE_L1

2 / 2

Final_Result_CAV

Frequency (MHz)	CAverage (dB μ V)	Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	32.83	55.75	22.93	9.000	L1	OFF	9.7
0.1928	28.79	53.92	25.13	9.000	L1	OFF	9.7
0.2310	24.44	52.41	27.97	9.000	L1	OFF	9.7
0.2693	19.90	51.14	31.24	9.000	L1	OFF	9.7
0.2873	13.11	50.60	37.50	9.000	L1	OFF	9.7
0.4560	24.68	46.77	22.08	9.000	L1	OFF	9.7
4.3588	11.31	46.00	34.69	9.000	L1	OFF	9.8
4.4735	11.47	46.00	34.53	9.000	L1	OFF	9.8
4.5095	11.53	46.00	34.47	9.000	L1	OFF	9.8
5.0000	11.76	46.00	34.24	9.000	L1	OFF	9.9
5.0045	11.74	50.00	38.26	9.000	L1	OFF	9.9
5.0360	11.62	50.00	38.38	9.000	L1	OFF	9.9
18.9455	19.04	50.00	30.96	9.000	L1	OFF	10.3
19.5148	20.46	50.00	29.54	9.000	L1	OFF	10.3
19.5710	19.73	50.00	30.27	9.000	L1	OFF	10.3
19.8050	19.24	50.00	30.76	9.000	L1	OFF	10.4
19.8253	19.09	50.00	30.91	9.000	L1	OFF	10.4
20.0008	18.51	50.00	31.49	9.000	L1	OFF	10.4

2022-09-28

오후 1:26:13

Conducted Emissions (Line 2)

2.4G MODE_N


1 / 2

Test Report

Common Information

EUT : SM-S911B/DS
 Manufacturer : SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions : WLAN 2.4G MODE_N

Full Spectrum

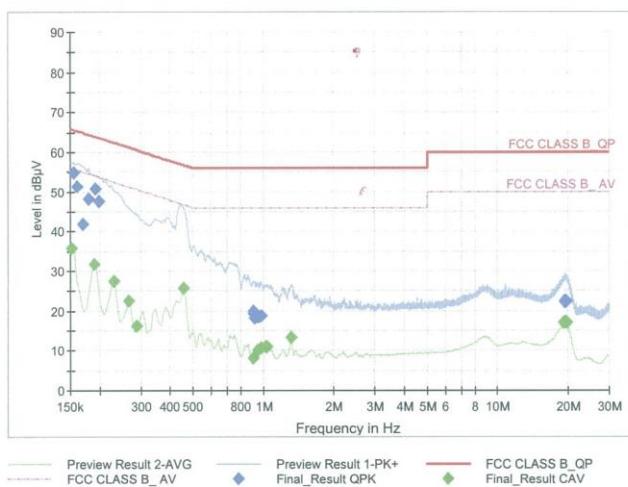

Final Result QPK

Frequency (MHz)	QuasiPeak (dB μ V)	Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	54.86	65.75	10.89	9.000	N	OFF	9.6
0.1613	51.39	65.40	14.01	9.000	N	OFF	9.6
0.1703	41.75	64.95	23.20	9.000	N	OFF	9.6
0.1793	48.06	64.52	16.46	9.000	N	OFF	9.6
0.1928	50.88	63.92	13.03	9.000	N	OFF	9.6
0.1995	47.67	63.63	15.96	9.000	N	OFF	9.6
0.9050	20.02	56.00	35.98	9.000	N	OFF	9.7
0.9118	19.36	56.00	36.64	9.000	N	OFF	9.7
0.9208	18.29	56.00	37.71	9.000	N	OFF	9.7
0.9388	18.56	56.00	37.44	9.000	N	OFF	9.7
0.9545	18.43	56.00	37.57	9.000	N	OFF	9.7
0.9793	18.68	56.00	37.32	9.000	N	OFF	9.7
19.3145	22.09	60.00	37.91	9.000	N	OFF	10.5
19.4540	22.37	60.00	37.63	9.000	N	OFF	10.5
19.5260	22.33	60.00	37.67	9.000	N	OFF	10.5
19.5395	22.45	60.00	37.55	9.000	N	OFF	10.5
19.5440	22.39	60.00	37.61	9.000	N	OFF	10.5
19.5890	22.26	60.00	37.74	9.000	N	OFF	10.5

2022-09-28

오후 1:15:18

2.4G MODE_N

2 / 2

Final_Result_CAV

Frequency (MHz)	CAverage (dB μ V)	Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1523	35.81	55.88	20.06	9.000	N	OFF	9.6
0.1905	31.84	54.02	22.17	9.000	N	OFF	9.6
0.2288	27.55	52.50	24.95	9.000	N	OFF	9.6
0.2670	22.40	51.21	28.81	9.000	N	OFF	9.6
0.2895	16.03	50.54	34.50	9.000	N	OFF	9.6
0.4560	25.55	46.77	21.22	9.000	N	OFF	9.6
0.9050	8.16	46.00	37.84	9.000	N	OFF	9.7
0.9455	10.14	46.00	35.86	9.000	N	OFF	9.7
0.9838	10.67	46.00	35.33	9.000	N	OFF	9.7
1.0265	11.10	46.00	34.90	9.000	N	OFF	9.7
1.0333	10.84	46.00	35.16	9.000	N	OFF	9.7
1.3168	13.25	46.00	32.75	9.000	N	OFF	9.7
19.2178	16.96	50.00	33.04	9.000	N	OFF	10.4
19.3325	17.14	50.00	32.86	9.000	N	OFF	10.5
19.4563	17.28	50.00	32.72	9.000	N	OFF	10.5
19.4810	17.26	50.00	32.74	9.000	N	OFF	10.5
19.5260	17.20	50.00	32.80	9.000	N	OFF	10.5
19.7690	16.99	50.00	33.01	9.000	N	OFF	10.5

2022-09-28

오후 1:15:18

10. LIST OF TEST EQUIPMENT

Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/22/2023	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	06/07/2023	Annual
Temperature Chamber	SU-642	ESPEC	0093008124	03/04/2023	Annual
Signal Analyzer	N9030A	Agilent	MY49432108	03/08/2023	Annual
Power Measurement Set	OSP 120	Rohde & Schwarz	101231	06/14/2023	Annual
Power Meter	N1911A	Agilent	MY45100523	03/24/2023	Annual
Power Sensor	N1921A	Agilent	MY57820067	03/24/2023	Annual
Directional Coupler	87300B	Agilent	3116A03621	11/02/2022	Annual
Power Splitter	11667B	Hewlett Packard	10545	02/03/2023	Annual
DC Power Supply	E3632A	HP	KR75303243	04/25/2023	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C	HP	08285	06/21/2023	Annual
Attenuator(20 dB)	18N-20dB	Rohde & Schwarz	8	03/07/2023	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	N/A	N/A	N/A
EM1000 / Controller	EM1000	Audix	060520	N/A	N/A
Turn Table	N/A	Audix	N/A	N/A	N/A
Amp &Filter Bank Switch Controller	FBSM-01B	TNM system	TM19050002	N/A	N/A
Loop Antenna	FMZB 1513	Rohde & Schwarz	1513-333	03/17/2024	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	08/16/2024	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1300	01/18/2024	Biennial
Horn Antenna(15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170124	04/12/2023	Biennial
Spectrum Analyzer	FSV(10 Hz ~ 40 GHz)	Rohde & Schwarz	101055	05/16/2023	Annual
Band Reject Filter	WRCJV2400/2483.5-2370/2520-60/12SS	Wainwright Instruments	2	01/06/2023	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	5	06/13/2023	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	6	06/13/2023	Annual
High Pass Filter(7 GHz ~ 18 GHz)	WHKX10-7150-8000-18000-50SS	Wainwright Instruments	1	03/11/2023	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/02/2022	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/11/2023	Annual
Bluetooth Tester	TC-3000C	TESCOM	3000C000175	04/05/2023	Annual
HPF(3~18GHz)+LNA1(1~18GHz)	FMSR-05B	TNM system	F6	01/19/2023	Annual
ATT(10dB) + LNA1(1~18GHz)	FMSR -05B	TNM system	None	01/19/2023	Annual
ATT(3dB) + LNA1(1~18GHz)	FMSR -05B	TNM system	None	01/19/2023	Annual
LNA1(1~18GHz)	FMSR -05B	TNM system	25540	01/19/2023	Annual
HPF(7~18GHz)+LNA2(6~18GHz)	FMSR -05B	TNM system	28550	01/19/2023	Annual
Thru(30MHz ~ 18GHz)	FMSR -05B	TNM system	None	01/19/2023	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2210-FC029-P