

# FCC LTE REPORT

## Certification

**Applicant Name:**  
SAMSUNG Electronics Co., Ltd.

**Date of Issue:**  
October 21, 2022

**Address:**  
129, Samsung-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**Location:**  
HCT CO., LTD.,  
74, Seoicheon-ro 578beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

**Report No.:** HCT-RF-2210-FC010

**FCC ID:** A3LSMS911B

**APPLICANT:** SAMSUNG Electronics Co., Ltd.

Model(s): SM-S911B/DS  
 Additional Model(s): SM-S911B  
 EUT Type: Mobile phone  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 FCC Rule Part(s): §24, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band2 (1.4)	1850.7 - 1909.3	1M10G7D	QPSK	0.213	23.28
		1M11W7D	16QAM	0.179	22.54
		1M10W7D	64QAM	0.139	21.42
		1M09W7D	256QAM	0.068	18.30
LTE – Band2 (3)	1851.5 - 1908.5	2M74G7D	QPSK	0.216	23.35
		2M72W7D	16QAM	0.182	22.61
		2M71W7D	64QAM	0.143	21.55
		2M72W7D	256QAM	0.069	18.37
LTE – Band2 (5)	1852.5 - 1907.5	4M53G7D	QPSK	0.210	23.22
		4M52W7D	16QAM	0.182	22.61
		4M51W7D	64QAM	0.142	21.52
		4M51W7D	256QAM	0.070	18.42
LTE – Band2 (10)	1855.0 - 1905.0	9M00G7D	QPSK	0.218	23.39
		8M98W7D	16QAM	0.177	22.48
		9M00W7D	64QAM	0.138	21.41
		9M00W7D	256QAM	0.068	18.33
LTE – Band2 (15)	1857.5 - 1902.5	13M5G7D	QPSK	0.201	23.04
		13M5W7D	16QAM	0.164	22.15
		13M5W7D	64QAM	0.128	21.07
		13M5W7D	256QAM	0.064	18.06
LTE – Band2 (20)	1860.0 - 1900.0	17M9G7D	QPSK	0.215	23.33
		18M0W7D	16QAM	0.171	22.32
		17M9W7D	64QAM	0.134	21.28
		17M9W7D	256QAM	0.066	18.22

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.  
 HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

Report No.: HCT-RF-2210-FC010

---

REVIEWED BY



---

Report prepared by : Jae Mun Do  
Engineer of Telecommunication Testing Center

---

Report approved by : Jong Seok Lee  
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked \*.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

\* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2210-FC010	October 21, 2022	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

## Table of Contents

REVIEWED BY .....	2
1. GENERAL INFORMATION .....	5
2. INTRODUCTION .....	6
2.1. DESCRIPTION OF EUT .....	6
2.2. MEASURING INSTRUMENT CALIBRATION .....	6
2.3. TEST FACILITY .....	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE .....	7
3.2 RADIATED POWER.....	8
3.3 RADIATED SPURIOUS EMISSIONS .....	9
3.4 PEAK- TO- AVERAGE RATIO.....	10
3.5 OCCUPIED BANDWIDTH. ....	12
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....	13
3.7 BAND EDGE .....	14
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	15
3.9 WORST CASE(RADIATED TEST) .....	16
3.10 WORST CASE(CONDUCTED TEST) .....	17
4. LIST OF TEST EQUIPMENT .....	18
5. MEASUREMENT UNCERTAINTY .....	19
6. SUMMARY OF TEST RESULTS .....	20
7. SAMPLE CALCULATION .....	21
8. TEST DATA .....	23
8.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	23
8.2 RADIATED SPURIOUS EMISSIONS .....	26
8.3 PEAK-TO-AVERAGE RATIO.....	27
8.4 OCCUPIED BANDWIDTH .....	28
8.5 CONDUCTED SPURIOUS EMISSIONS .....	29
8.6 BAND EDGE .....	30
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	31
8.8 UPLINK CARRIER AGGREGATION .....	49
8.8.1 RADIATED SPURIOUS EMISSIONS .....	50
9. TEST PLOTS.....	51
10. APPENDIX A_ TEST SETUP PHOTO .....	172

# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

<b>Applicant Name:</b>	SAMSUNG Electronics Co., Ltd.
<b>Address:</b>	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
<b>FCC ID:</b>	A3LSMS911B
<b>Application Type:</b>	Certification
<b>FCC Classification:</b>	PCS Licensed Transmitter Held to Ear (PCE)
<b>FCC Rule Part(s):</b>	§24, §2
<b>EUT Type:</b>	Mobile phone
<b>Model(s):</b>	SM-S911B/DS
<b>Additional Model(s):</b>	SM-S911B
<b>Tx Frequency:</b>	1850.7 MHz – 1909.3 MHz (LTE – Band2 (1.4 MHz)) 1851.5 MHz – 1908.5 MHz (LTE – Band2 (3 MHz)) 1852.5 MHz – 1907.5 MHz (LTE – Band2 (5 MHz)) 1855.0 MHz – 1905.0 MHz (LTE – Band2 (10 MHz)) 1857.5 MHz – 1902.5 MHz (LTE – Band2 (15 MHz)) 1860.0 MHz – 1900.0 MHz (LTE – Band2 (20 MHz))
<b>Date(s) of Tests:</b>	August 31, 2022~ October 11, 2022
<b>Serial number:</b>	Radiated: R3CT706PQ2F Conducted: 64208a01b13f7ece

## **2. INTRODUCTION**

### **2.1. DESCRIPTION OF EUT**

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160 MHz), Bluetooth, BT LE, NFC, AIT, WPT.

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

## 3.2 RADIATED POWER

### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $>$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.



### 3.3 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

#### Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $> 2 \times$  span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_g_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where:  $P_g$  is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

### 3.4 PEAK- TO- AVERAGE RATIO

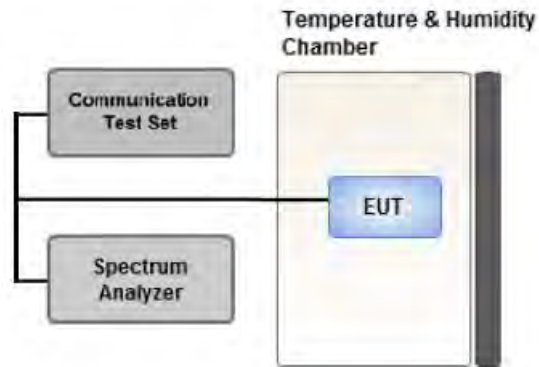

**Test setup**

#### ① CCDF Procedure for PAPR

##### **Test Settings**

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
  - .- for continuous transmissions, set to 1 ms,
  - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

**② Alternate Procedure for PAPR**

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as  $P_{Pk}$ .  
Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as  $P_{Avg}$ . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

**Test Settings(Peak Power)**


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW  $\geq 3 \times$  RBW.

1. Set the RBW  $\geq$  OBW.
2. Set VBW  $\geq 3 \times$  RBW.
3. Set span  $\geq 2 \times$  OBW.
4. Sweep time  $\geq 10 \times$  (number of points in sweep)  $\times$  (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

**Test Settings(Average Power)**

1. Set span to  $2 \times$  to  $3 \times$  the OBW.
2. Set RBW  $\geq$  OBW.
3. Set VBW  $\geq 3 \times$  RBW.
4. Set number of measurement points in sweep  $\geq 2 \times$  span / RBW.
5. Sweep time:  
Set  $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$  for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add  $[10 \log (1/\text{duty cycle})]$  to the measured maximum power level to compute the average power during continuous transmission. For example, add  $[10 \log (1/0.25)] = 6$  dB if the duty cycle is a constant 25 %.

### 3.5 OCCUPIED BANDWIDTH.

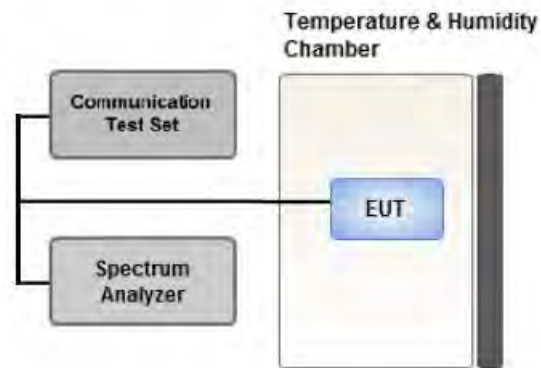

**Test setup**

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### **Test Settings**

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

### 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

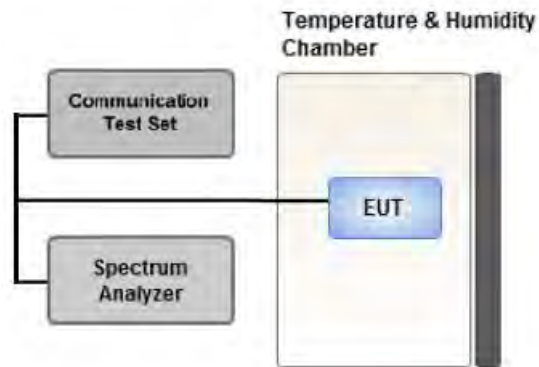

**Test setup**


#### **Test Overview**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### **Test Settings**

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = RMS
4. Trace Mode = Average
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 \* Span / RBW

### 3.7 BAND EDGE

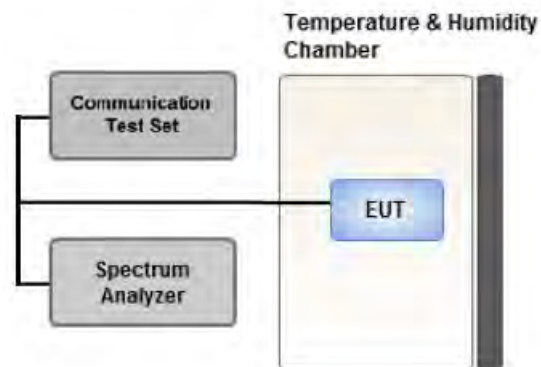

#### Test setup

#### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

#### Test Notes


According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels (low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by  $10 \log(1 \text{ MHz}/ \text{RB})$  or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

### 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

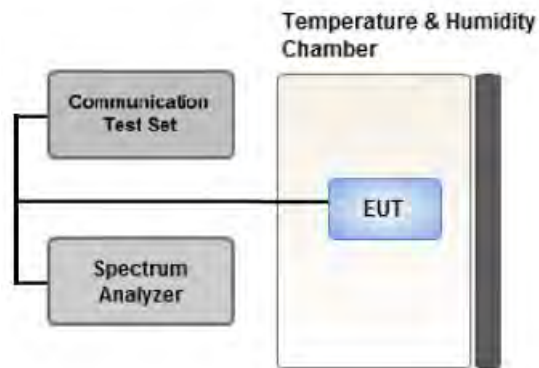

**Test setup**

#### **Test Overview**

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

#### **Test Settings**

1. The carrier frequency of the transmitter is measured at room temperature

(20 °C to provide a reference).

2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

**3.9 WORST CASE(RADIATED TEST)**

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.  
 Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)  
 Worst case : Stand alone
- We were performed the RSE test in condition of co-location.  
 Mode : Stand alone, Simultaneous transmission scenarios  
 Worst case : Stand alone
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 10 MHz)
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.
- SM-S911B/DS & additional models were tested and the worst case results are reported.  
 (Worst case : SM-S911B/DS)

[ Worst case ]

Test Description	Modulation	RB size	RB offset	Axis
<b>Effective Radiated Power</b>	QPSK, 16QAM, 64QAM, 256QAM	1	0	X
<b>Radiated Spurious and Harmonic Emissions</b>	QPSK	1	0	Z



**3.10 WORST CASE(CONDUCTED TEST)**

[ Worst case ]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset		
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0		
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0		
Band Edge	QPSK	1.4	Low	1	0		
			High	1	5		
		3	Low	1	0		
			High	1	14		
		5	Low	1	0		
			High	1	24		
		10	Low	1	0		
			High	1	49		
		15	Low	1	0		
			High	1	74		
		20	Low	1	0		
			High	1	99		
				1.4, 3, 5, 10, 15, 20	Low, High	Full RB	0
		Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5, 10, 15, 20	Low, Mid, High	1	0

- All modes of operation were investigated and the worst case configuration results are reported.

- SM-S911B/DS & additional models were tested and the worst case results are reported.

(Worst case : SM-S911B/DS)

#### 4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
H.P.F	FBSR-02B(WHK1.2/15 G-10EF)	T&M SYSTEM	-	02/18/2023	Annual
H.P.F	FBSR-02B(WHK3.3/18 G-10EF)	T&M SYSTEM	-	02/18/2023	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	11275	03/11/2023	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/21/2023	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	04/05/2023	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	04/05/2023	Biennial
Chamber	SU-642	ESPEC	93008124	03/04/2023	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/30/2023	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/15/2023	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	04/12/2023	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	05/02/2023	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	05/18/2023	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	08/29/2023	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2023	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/17/2024	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/03/2023	Biennial
Hybrid Antenna	VULB9168	Schwarzbeck	760	02/22/2023	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262116770	07/05/2023	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6200863156	12/29/2022	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2023	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/30/2023	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

**Note:**

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	2.00 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (9 kHz ~ 30 MHz)	4.40 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (30 MHz ~ 1 GHz)	5.74 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (1 GHz ~ 18 GHz)	5.51 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (18 GHz ~ 40 GHz)	5.92 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (Above 40 GHz)	5.48 (Confidence level about 95 %, $k=2$ )

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §24.238(a)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§24.232(d)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§24.235	Emission must remain in band	PASS

**Note:**

1. See SAR Report

### 6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§24.232(c)	< 2 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §24.238(a)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

**ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)**

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

**EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)**

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

**7.3. Emission Designator**

**GSM Emission Designator**

**Emission Designator = 249KGXW**

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

**EDGE Emission Designator**

**Emission Designator = 249KG7W**

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

**WCDMA Emission Designator**

**Emission Designator = 4M17F9W**

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

**QPSK Modulation**

**Emission Designator = 4M48G7D**

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

**QAM Modulation**

**Emission Designator = 4M48W7D**

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

## 8. TEST DATA

### 8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
1850.7	LTE B2/ 1.4 MHz	QPSK	-19.77	14.01	10.40	2.13	H	< 2.00	0.169	22.28	
		16-QAM	-20.53	13.25	10.40	2.13	H		0.142	21.52	
		64-QAM	-21.64	12.14	10.40	2.13	H		0.110	20.41	
		256-QAM	-24.74	9.04	10.40	2.13	H		0.054	17.31	
1880.0		QPSK	-19.59	15.03	10.40	2.23	H		0.209	23.20	
		16-QAM	-20.41	14.21	10.40	2.23	H		0.173	22.38	
		64-QAM	-21.49	13.13	10.40	2.23	H		0.135	21.30	
		256-QAM	-24.56	10.06	10.40	2.23	H		0.067	18.23	
1909.3		QPSK	-19.55	15.02	10.40	2.14	H		0.213	23.28	
		16-QAM	-20.29	14.28	10.40	2.14	H		0.179	22.54	
		64-QAM	-21.41	13.16	10.40	2.14	H		0.139	21.42	
		256-QAM	-24.53	10.04	10.40	2.14	H		0.068	18.30	

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
1851.5	LTE B2/ 3 MHz	QPSK	-19.80	13.98	10.40	2.13	H	< 2.00	0.168	22.25	
		16-QAM	-20.57	13.21	10.40	2.13	H		0.141	21.48	
		64-QAM	-21.62	12.16	10.40	2.13	H		0.111	20.43	
		256-QAM	-24.73	9.05	10.40	2.13	H		0.054	17.32	
1880.0		QPSK	-19.59	15.03	10.40	2.23	H		0.209	23.20	
		16-QAM	-20.36	14.26	10.40	2.23	H		0.175	22.43	
		64-QAM	-21.43	13.19	10.40	2.23	H		0.137	21.36	
		256-QAM	-24.54	10.08	10.40	2.23	H		0.067	18.25	
1908.5		QPSK	-19.48	15.09	10.40	2.14	H		0.216	23.35	
		16-QAM	-20.22	14.35	10.40	2.14	H		0.182	22.61	
		64-QAM	-21.28	13.29	10.40	2.14	H		0.143	21.55	
		256-QAM	-24.46	10.11	10.40	2.14	H		0.069	18.37	

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
1852.5	LTE B2/ 5 MHz	QPSK	-19.96	13.82	10.40	2.13	H	< 2.00	0.162	22.09	
		16-QAM	-20.64	13.14	10.40	2.13	H		0.139	21.41	
		64-QAM	-21.68	12.10	10.40	2.13	H		0.109	20.37	
		256-QAM	-24.79	8.99	10.40	2.13	H		0.053	17.26	
1880.0		QPSK	-19.57	15.05	10.40	2.23	H		0.210	23.22	
		16-QAM	-20.18	14.44	10.40	2.23	H		0.182	22.61	
		64-QAM	-21.27	13.35	10.40	2.23	H		0.142	21.52	
		256-QAM	-24.37	10.25	10.40	2.23	H		0.070	18.42	
1907.5		QPSK	-19.86	14.71	10.40	2.14	H		0.198	22.97	
		16-QAM	-20.56	14.01	10.40	2.14	H		0.169	22.27	
		64-QAM	-21.64	12.93	10.40	2.14	H		0.132	21.19	
		256-QAM	-24.81	9.76	10.40	2.14	H		0.063	18.02	

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
1855.0	LTE B2/ 10 MHz	QPSK	-20.07	13.89	10.40	2.15	H	< 2.00	0.164	22.14	
		16-QAM	-20.88	13.08	10.40	2.15	H		0.136	21.33	
		64-QAM	-21.95	12.01	10.40	2.15	H		0.106	20.26	
		256-QAM	-25.05	8.91	10.40	2.15	H		0.052	17.16	
1880.0		QPSK	-19.40	15.22	10.40	2.23	H		0.218	23.39	
		16-QAM	-20.31	14.31	10.40	2.23	H		0.177	22.48	
		64-QAM	-21.38	13.24	10.40	2.23	H		0.138	21.41	
		256-QAM	-24.46	10.16	10.40	2.23	H		0.068	18.33	
1905.0		QPSK	-19.71	14.87	10.40	2.16	H		0.205	23.11	
		16-QAM	-20.43	14.15	10.40	2.16	H		0.173	22.39	
		64-QAM	-21.53	13.05	10.40	2.16	H		0.135	21.29	
		256-QAM	-24.68	9.90	10.40	2.16	H		0.065	18.14	



Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
1857.5	LTE B2/ 15 MHz	QPSK	-20.01	14.13	10.40	2.17	H	< 2.00	0.172	22.36	
		16-QAM	-21.08	13.06	10.40	2.17	H		0.135	21.29	
		64-QAM	-22.10	12.04	10.40	2.17	H		0.107	20.27	
		256-QAM	-25.23	8.91	10.40	2.17	H		0.052	17.14	
1880.0		QPSK	-19.75	14.87	10.40	2.23	H		0.201	23.04	
		16-QAM	-20.64	13.98	10.40	2.23	H		0.164	22.15	
		64-QAM	-21.75	12.87	10.40	2.23	H		0.127	21.04	
		256-QAM	-24.85	9.77	10.40	2.23	H		0.062	17.94	
1902.5		QPSK	-19.91	14.68	10.40	2.18	H		0.195	22.90	
		16-QAM	-20.67	13.92	10.40	2.18	H		0.164	22.14	
		64-QAM	-21.74	12.85	10.40	2.18	H		0.128	21.07	
		256-QAM	-24.75	9.84	10.40	2.18	H		0.064	18.06	

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
1860.0	LTE B2/ 20 MHz	QPSK	-20.25	13.89	10.40	2.17	H	< 2.00	0.163	22.12	
		16-QAM	-21.08	13.06	10.40	2.17	H		0.135	21.29	
		64-QAM	-22.16	11.98	10.40	2.17	H		0.105	20.21	
		256-QAM	-25.22	8.92	10.40	2.17	H		0.052	17.15	
1880.0		QPSK	-19.46	15.16	10.40	2.23	H		0.215	23.33	
		16-QAM	-20.47	14.15	10.40	2.23	H		0.171	22.32	
		64-QAM	-21.51	13.11	10.40	2.23	H		0.134	21.28	
		256-QAM	-24.57	10.05	10.40	2.23	H		0.066	18.22	
1900.0		QPSK	-19.85	14.74	10.40	2.18	H		0.198	22.96	
		16-QAM	-20.82	13.77	10.40	2.18	H		0.158	21.99	
		64-QAM	-21.85	12.74	10.40	2.18	H		0.125	20.96	
		256-QAM	-24.91	9.68	10.40	2.18	H		0.062	17.90	

### 8.2 RADIATED SPURIOUS EMISSIONS

- ▣ OPERATING FREQUENCY: 1880.0 MHz
- ▣ MEASURED OUTPUT POWER: 23.39 dBm = 0.218 W
- ▣ MODE: LTE B2
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  36.39 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
18650 (1855.0)	3 710.00	-53.97	12.30	-59.08	3.14	H	-49.92	73.31
	5 565.00	-56.45	13.30	-54.36	3.90	V	-44.96	68.35
	7 420.00	-57.24	10.80	-47.08	4.57	V	-40.85	64.24
18900 (1880.0)	3 760.00	-54.24	12.32	-58.74	3.08	V	-49.50	72.89
	5 640.00	-55.74	13.10	-53.93	3.90	V	-44.73	68.12
	7 520.00	-56.96	10.84	-46.38	4.61	H	-40.15	63.54
19150 (1905.0)	3 810.00	-54.98	12.40	-59.40	3.12	H	-50.12	73.51
	5 715.00	-55.32	13.07	-52.95	3.96	H	-43.83	67.22
	7 620.00	-56.82	11.18	-46.33	4.65	V	-39.80	63.19

**8.3 PEAK-TO-AVERAGE RATIO**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
2	1.4 MHz	1880.0	QPSK	6	0	5.48
			16-QAM	6	0	6.23
			64-QAM	6	0	6.76
			256-QAM	6	0	6.88
	3 MHz		QPSK	15	0	5.38
			16-QAM	15	0	6.23
			64-QAM	15	0	6.70
			256-QAM	15	0	6.83
	5 MHz		QPSK	25	0	5.43
			16-QAM	25	0	6.24
			64-QAM	25	0	6.65
			256-QAM	25	0	6.81
	10 MHz		QPSK	50	0	5.49
			16-QAM	50	0	6.21
			64-QAM	50	0	6.63
			256-QAM	50	0	6.79
	15 MHz		QPSK	75	0	5.38
			16-QAM	75	0	6.18
			64-QAM	75	0	6.60
			256-QAM	75	0	6.76
20 MHz	QPSK	100	0	5.28		
	16-QAM	100	0	6.14		
	64-QAM	100	0	6.56		
	256-QAM	100	0	6.74		

**Note:**

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 112 ~ 135.

**8.4 OCCUPIED BANDWIDTH**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
2	1.4 MHz	1880.0	QPSK	6	0	1.1017
			16-QAM	6	0	1.1049
			64-QAM	6	0	1.1034
			256-QAM	6	0	1.0933
	3 MHz		QPSK	15	0	2.7361
			16-QAM	15	0	2.7145
			64-QAM	15	0	2.7081
			256-QAM	15	0	2.7156
	5 MHz		QPSK	25	0	4.5292
			16-QAM	25	0	4.5158
			64-QAM	25	0	4.5093
			256-QAM	25	0	4.5105
	10 MHz		QPSK	50	0	9.0020
			16-QAM	50	0	8.9810
			64-QAM	50	0	8.9988
			256-QAM	50	0	8.9988
	15 MHz		QPSK	75	0	13.459
			16-QAM	75	0	13.460
			64-QAM	75	0	13.485
			256-QAM	75	0	13.456
20 MHz	QPSK	100	0	17.922		
	16-QAM	100	0	17.963		
	64-QAM	100	0	17.934		
	256-QAM	100	0	17.905		

**Note:**

1. Plots of the EUT's Occupied Bandwidth are shown Page 88 ~ 111.

**8.5 CONDUCTED SPURIOUS EMISSIONS**

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
2	1.4	1850.7	3.7084	27.976	-77.317	-49.341	-13.00
		1880.0	3.6935	27.976	-77.190	-49.214	
		1909.3	3.6850	27.976	-77.435	-49.459	
	3	1851.5	3.6840	27.976	-77.481	-49.505	
		1880.0	3.6950	27.976	-77.426	-49.450	
		1908.5	3.6805	27.976	-77.145	-49.169	
	5	1852.5	3.7044	27.976	-77.251	-49.275	
		1880.0	3.7029	27.976	-77.044	-49.068	
		1907.5	3.6975	27.976	-77.283	-49.307	
	10	1855.0	3.7024	27.976	-77.288	-49.312	
		1880.0	3.6915	27.976	-77.359	-49.383	
		1905.0	3.6900	27.976	-77.548	-49.572	
	15	1857.5	3.7039	27.976	-77.417	-49.441	
		1880.0	3.6980	27.976	-76.987	-49.011	
		1902.5	3.7000	27.976	-77.214	-49.238	
	20	1860.0	3.6920	27.976	-77.221	-49.245	
		1880.0	3.7109	27.976	-76.813	-48.837	
		1900.0	3.7099	27.976	-77.404	-49.428	

**Note:**

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 136 ~ 171.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


## 8.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 52 ~ 87.

**8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE**


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1850,700,000 Hz
- ▣ CHANNEL: 18607 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1850 700 007	0.0	0.000 000	0.000
100 %		-30	1850 700 008	1.7	0.000 000	0.001
100 %		-20	1850 700 004	-3.0	0.000 000	-0.002
100 %		-10	1850 700 012	4.9	0.000 000	0.003
100 %		0	1850 700 003	-4.0	0.000 000	-0.002
100 %		+10	1850 700 010	3.7	0.000 000	0.002
100 %		+30	1850 700 008	1.6	0.000 000	0.001
100 %		+40	1850 700 004	-2.4	0.000 000	-0.001
100 %		+50	1850 700 004	-2.7	0.000 000	-0.001
Batt. Endpoint		3.300	+20	1850 700 011	4.4	0.000 000

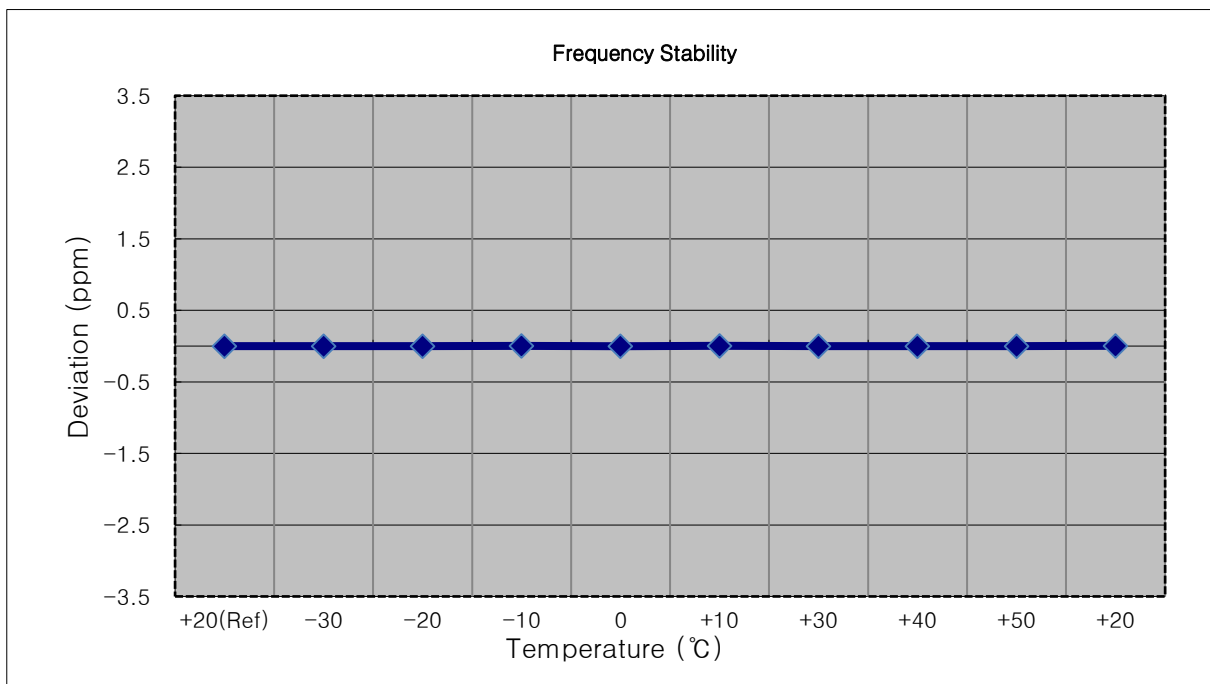

- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1851,500,000 Hz
- ▣ CHANNEL: 18615 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1851 500 003	0.0	0.000 000	0.000
100 %		-30	1851 500 006	3.5	0.000 000	0.002
100 %		-20	1851 499 999	-3.2	0.000 000	-0.002
100 %		-10	1851 499 999	-3.2	0.000 000	-0.002
100 %		0	1851 500 005	2.8	0.000 000	0.002
100 %		+10	1851 500 007	3.9	0.000 000	0.002
100 %		+30	1851 499 996	-7.0	0.000 000	-0.004
100 %		+40	1851 500 008	5.1	0.000 000	0.003
100 %		+50	1851 500 005	2.4	0.000 000	0.001
Batt. Endpoint	3.300	+20	1851 500 004	1.6	0.000 000	0.001

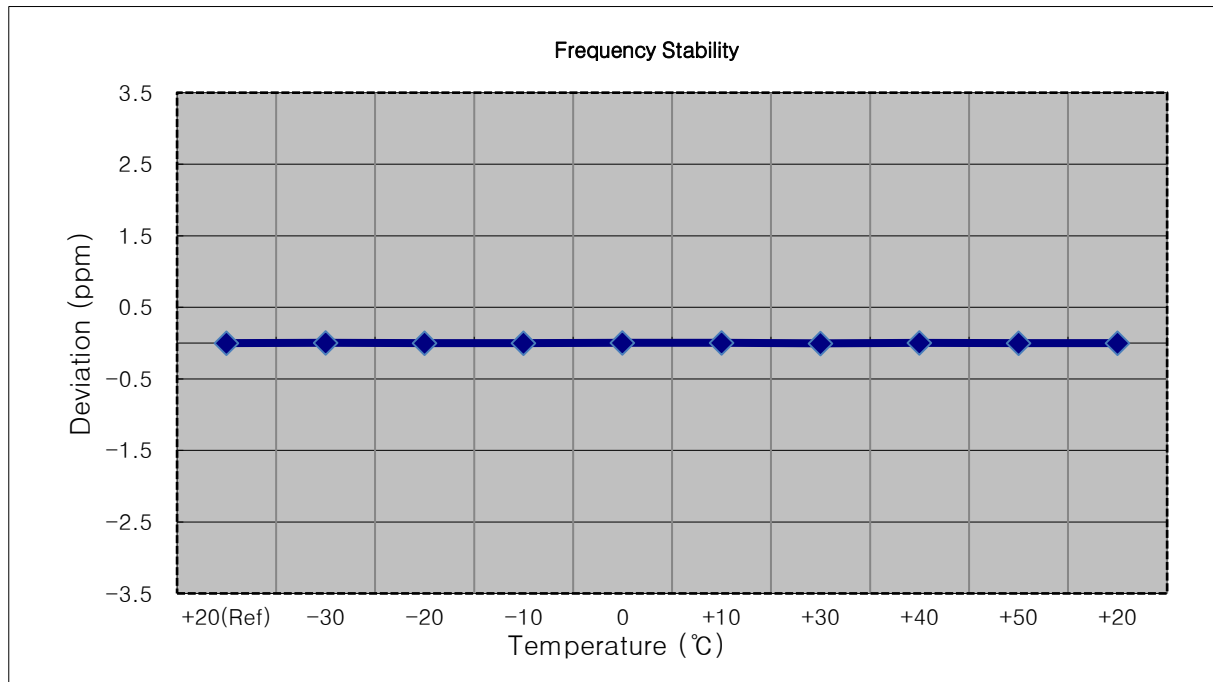




- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1852,500,000 Hz
- ▣ CHANNEL: 18625 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1852 500 003	0.0	0.000 000	0.000
100 %		-30	1852 500 007	3.6	0.000 000	0.002
100 %		-20	1852 500 008	4.7	0.000 000	0.003
100 %		-10	1852 500 008	5.3	0.000 000	0.003
100 %		0	1852 499 999	-4.2	0.000 000	-0.002
100 %		+10	1852 500 006	2.7	0.000 000	0.001
100 %		+30	1852 500 006	3.3	0.000 000	0.002
100 %		+40	1852 500 001	-2.3	0.000 000	-0.001
100 %		+50	1852 499 999	-3.7	0.000 000	-0.002
Batt. Endpoint		3.300	+20	1852 500 007	4.2	0.000 000

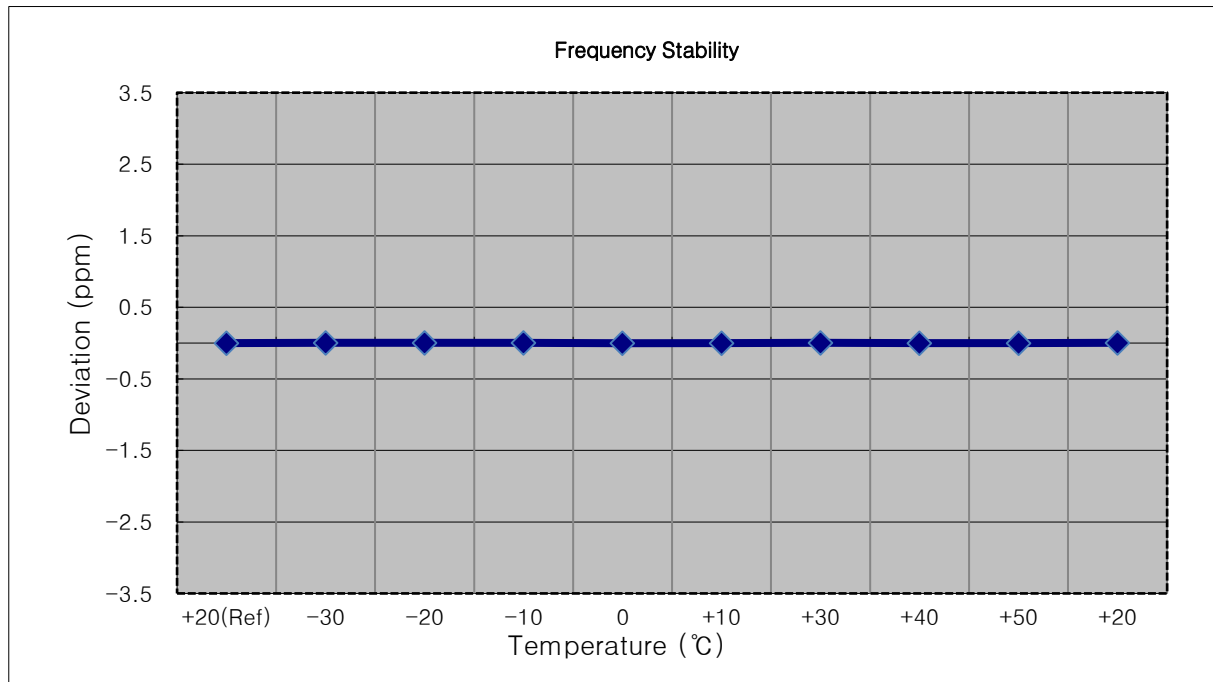


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1855,000,000 Hz
- ▣ CHANNEL: 18650 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1854 999 998	0.0	0.000 000	0.000
100 %		-30	1855 000 002	3.6	0.000 000	0.002
100 %		-20	1855 000 001	2.6	0.000 000	0.001
100 %		-10	1854 999 995	-2.7	0.000 000	-0.001
100 %		0	1854 999 993	-4.7	0.000 000	-0.003
100 %		+10	1855 000 003	4.9	0.000 000	0.003
100 %		+30	1854 999 996	-2.4	0.000 000	-0.001
100 %		+40	1854 999 993	-4.6	0.000 000	-0.002
100 %		+50	1855 000 000	1.7	0.000 000	0.001
Batt. Endpoint	3.300	+20	1854 999 994	-3.8	0.000 000	-0.002

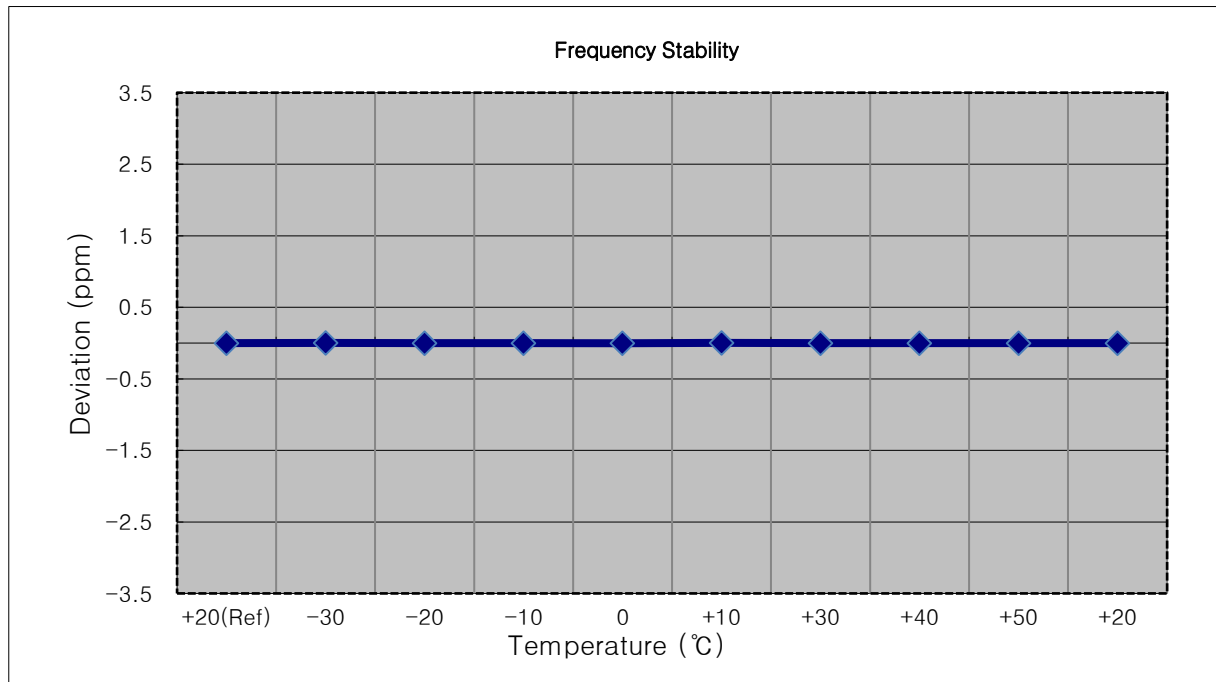


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1857,500,000 Hz
- ▣ CHANNEL: 18675 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1857 499 994	0.0	0.000 000	0.000
100 %		-30	1857 499 990	-3.4	0.000 000	-0.002
100 %		-20	1857 499 989	-4.7	0.000 000	-0.003
100 %		-10	1857 499 990	-3.1	0.000 000	-0.002
100 %		0	1857 499 990	-3.7	0.000 000	-0.002
100 %		+10	1857 499 992	-1.9	0.000 000	-0.001
100 %		+30	1857 499 991	-2.9	0.000 000	-0.002
100 %		+40	1857 499 990	-3.3	0.000 000	-0.002
100 %		+50	1857 499 989	-4.1	0.000 000	-0.002
Batt. Endpoint	3.300	+20	1857 499 996	2.7	0.000 000	0.001

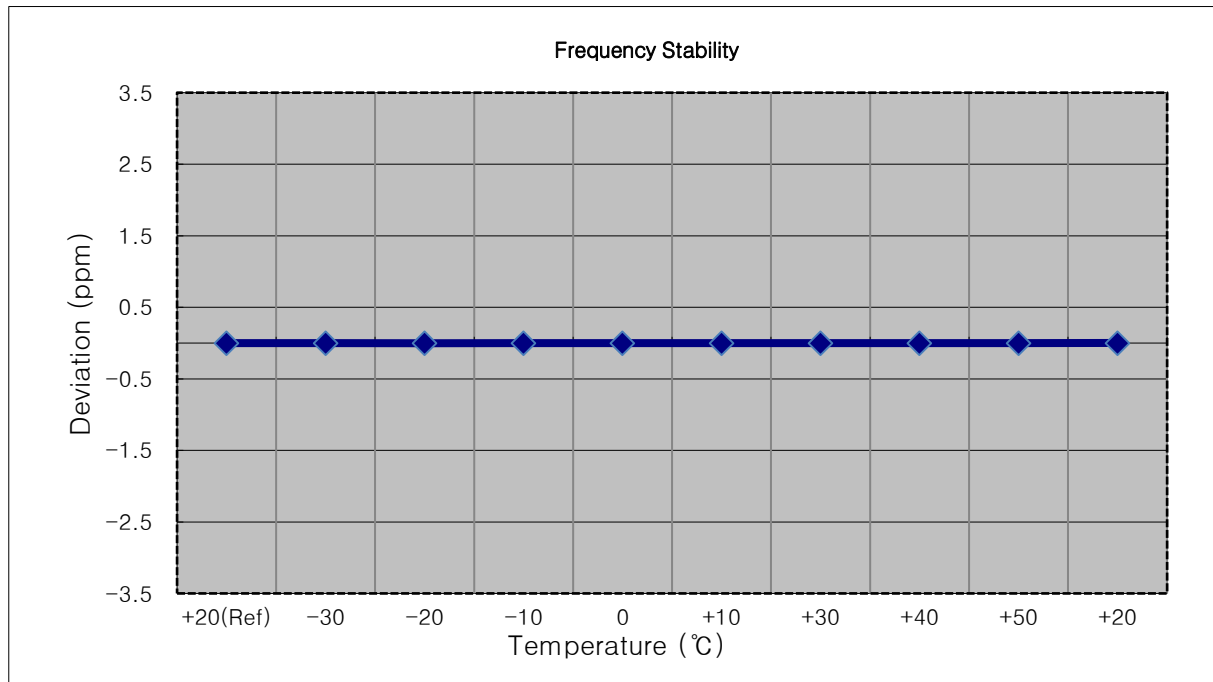


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1860,000,000 Hz
- ▣ CHANNEL: 18700 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1860 000 004	0.0	0.000 000	0.000
100 %		-30	1860 000 007	3.5	0.000 000	0.002
100 %		-20	1860 000 009	5.0	0.000 000	0.003
100 %		-10	1860 000 009	5.6	0.000 000	0.003
100 %		0	1860 000 009	5.7	0.000 000	0.003
100 %		+10	1860 000 010	6.1	0.000 000	0.003
100 %		+30	1860 000 010	6.4	0.000 000	0.003
100 %		+40	1860 000 010	6.3	0.000 000	0.003
100 %		+50	1860 000 009	5.1	0.000 000	0.003
Batt. Endpoint	3.300	+20	1860 000 009	5.4	0.000 000	0.003

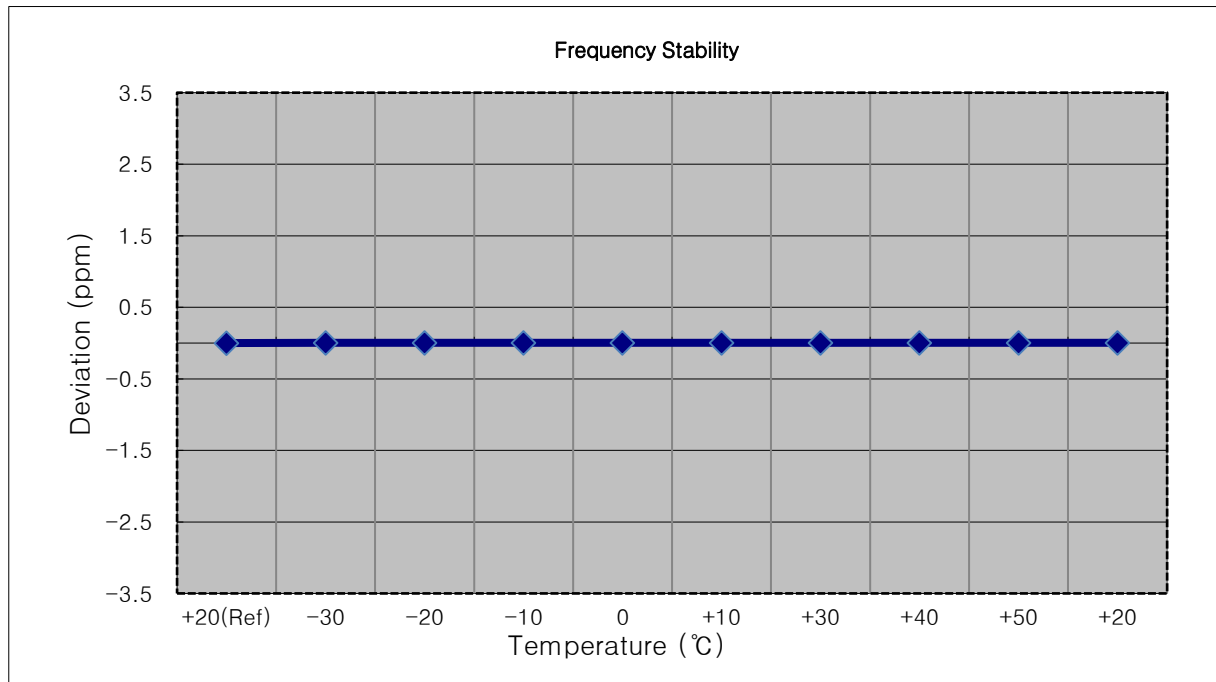


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1880 000 003	0.0	0.000 000	0.000
100 %		-30	1880 000 008	4.8	0.000 000	0.003
100 %		-20	1880 000 008	4.6	0.000 000	0.002
100 %		-10	1880 000 001	-2.7	0.000 000	-0.001
100 %		0	1880 000 008	4.9	0.000 000	0.003
100 %		+10	1880 000 007	3.6	0.000 000	0.002
100 %		+30	1880 000 000	-3.4	0.000 000	-0.002
100 %		+40	1880 000 007	3.2	0.000 000	0.002
100 %		+50	1880 000 006	2.9	0.000 000	0.002
Batt. Endpoint	3.300	+20	1879 999 994	-8.9	0.000 000	-0.005

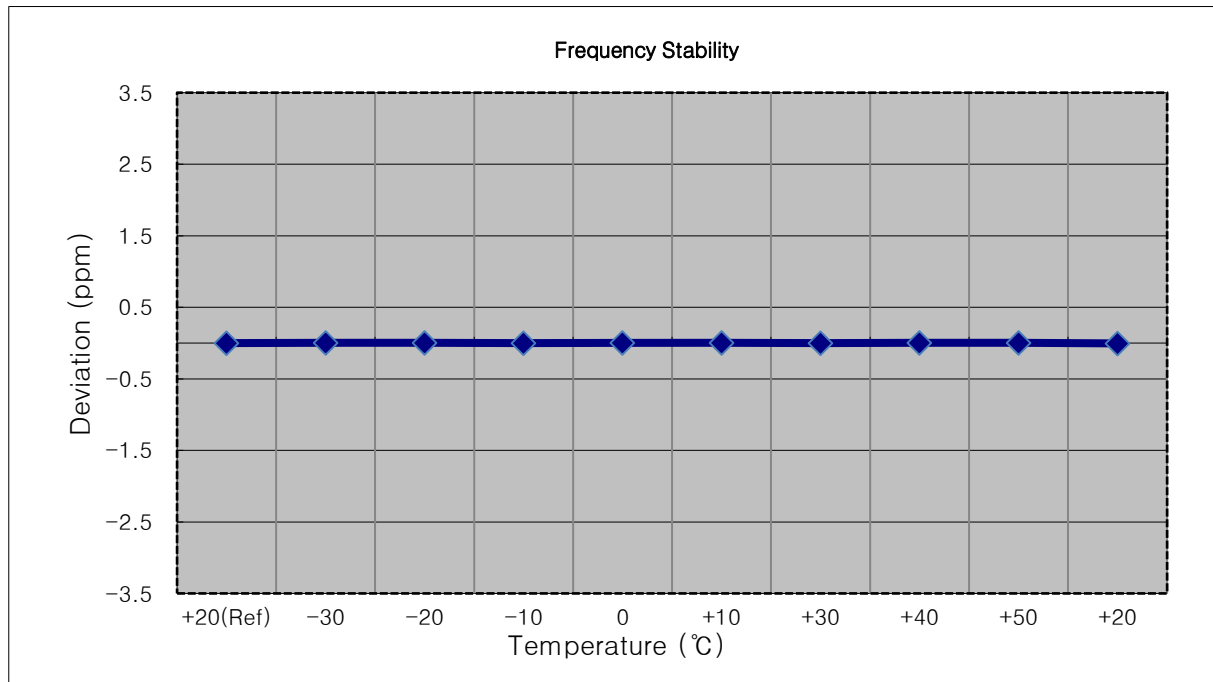


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1880 000 004	0.0	0.000 000	0.000
100 %		-30	1880 000 008	3.7	0.000 000	0.002
100 %		-20	1880 000 006	2.2	0.000 000	0.001
100 %		-10	1880 000 000	-4.6	0.000 000	-0.002
100 %		0	1879 999 997	-7.4	0.000 000	-0.004
100 %		+10	1879 999 999	-4.9	0.000 000	-0.003
100 %		+30	1880 000 007	2.5	0.000 000	0.001
100 %		+40	1879 999 999	-4.7	0.000 000	-0.002
100 %		+50	1880 000 000	-4.0	0.000 000	-0.002
Batt. Endpoint	3.300	+20	1880 000 008	3.9	0.000 000	0.002

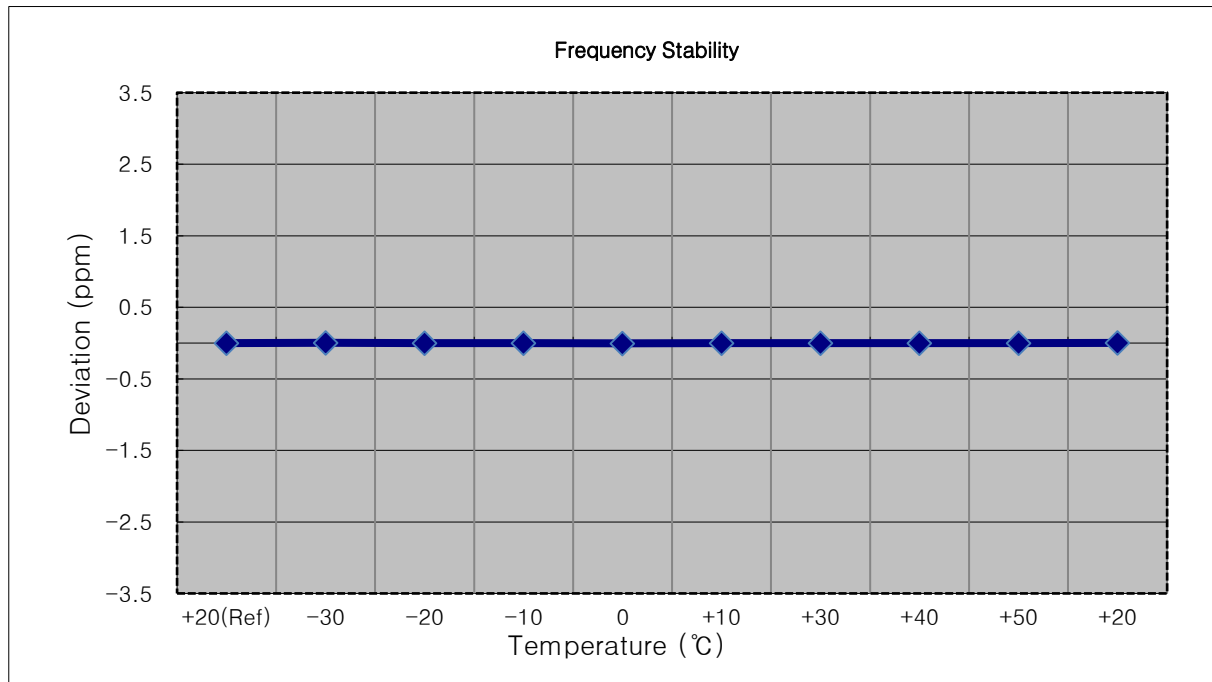


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1879 999 995	0.0	0.000 000	0.000
100 %		-30	1879 999 992	-2.9	0.000 000	-0.002
100 %		-20	1879 999 992	-2.8	0.000 000	-0.001
100 %		-10	1879 999 997	2.5	0.000 000	0.001
100 %		0	1879 999 999	4.2	0.000 000	0.002
100 %		+10	1879 999 998	3.2	0.000 000	0.002
100 %		+30	1879 999 991	-3.8	0.000 000	-0.002
100 %		+40	1879 999 998	2.9	0.000 000	0.002
100 %		+50	1879 999 998	2.9	0.000 000	0.002
Batt. Endpoint	3.300	+20	1879 999 999	4.3	0.000 000	0.002

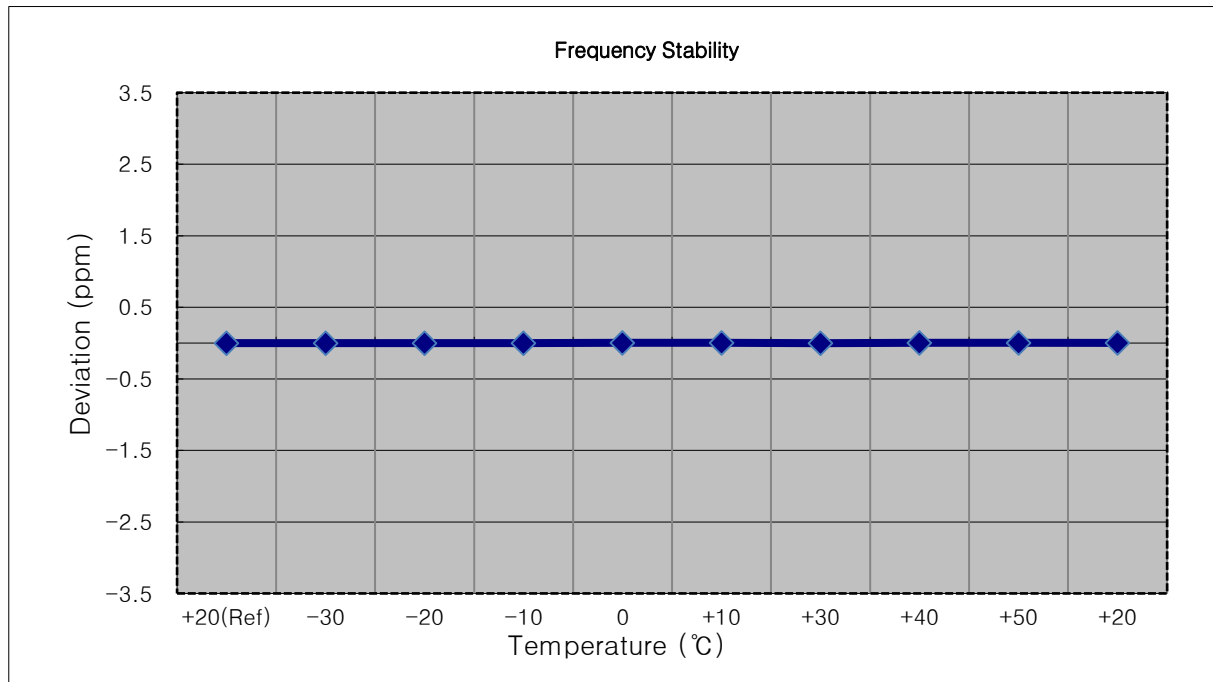

- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1879 999 995	0.0	0.000 000	0.000
100 %		-30	1879 999 990	-4.8	0.000 000	-0.003
100 %		-20	1879 999 992	-2.9	0.000 000	-0.002
100 %		-10	1879 999 991	-3.7	0.000 000	-0.002
100 %		0	1879 999 992	-3.0	0.000 000	-0.002
100 %		+10	1879 999 991	-3.8	0.000 000	-0.002
100 %		+30	1879 999 990	-4.4	0.000 000	-0.002
100 %		+40	1879 999 992	-2.3	0.000 000	-0.001
100 %		+50	1879 999 987	-7.6	0.000 000	-0.004
Batt. Endpoint	3.300	+20	1879 999 990	-4.2	0.000 000	-0.002

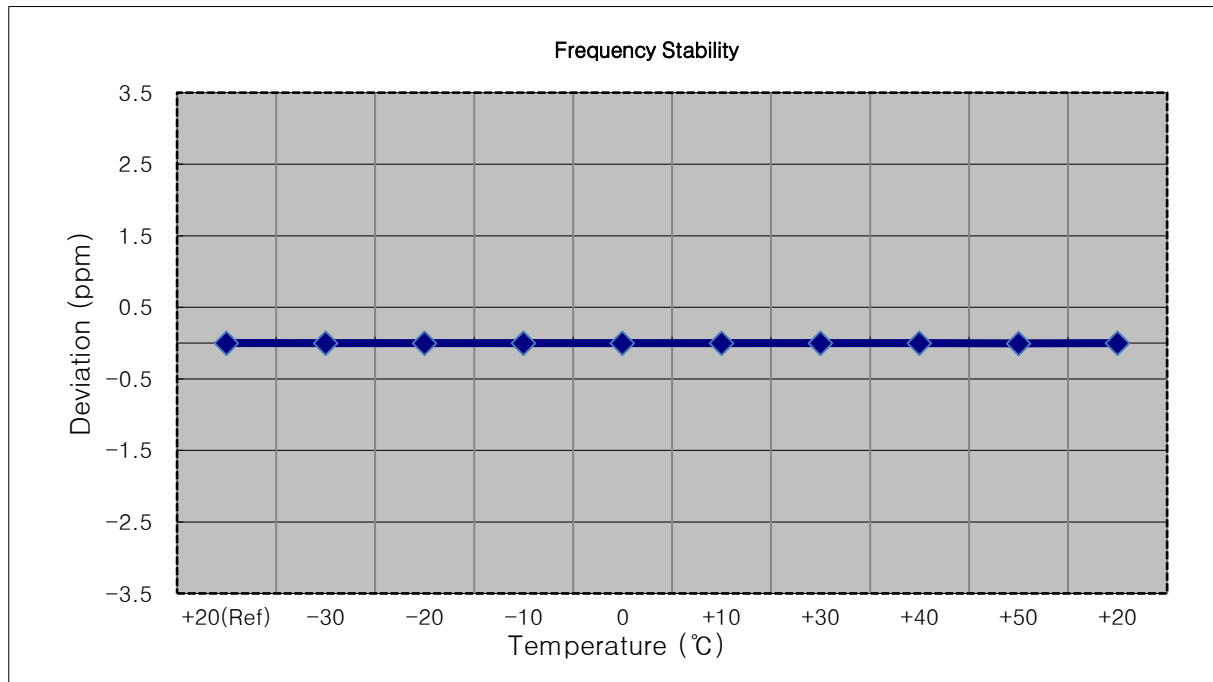




- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1880 000 003	0.0	0.000 000	0.000
100 %		-30	1880 000 008	5.0	0.000 000	0.003
100 %		-20	1880 000 010	6.7	0.000 000	0.004
100 %		-10	1880 000 006	2.7	0.000 000	0.001
100 %		0	1880 000 007	4.0	0.000 000	0.002
100 %		+10	1880 000 009	5.4	0.000 000	0.003
100 %		+30	1880 000 008	4.5	0.000 000	0.002
100 %		+40	1880 000 008	4.7	0.000 000	0.002
100 %		+50	1880 000 007	3.9	0.000 000	0.002
Batt. Endpoint	3.300	+20	1880 000 006	2.5	0.000 000	0.001

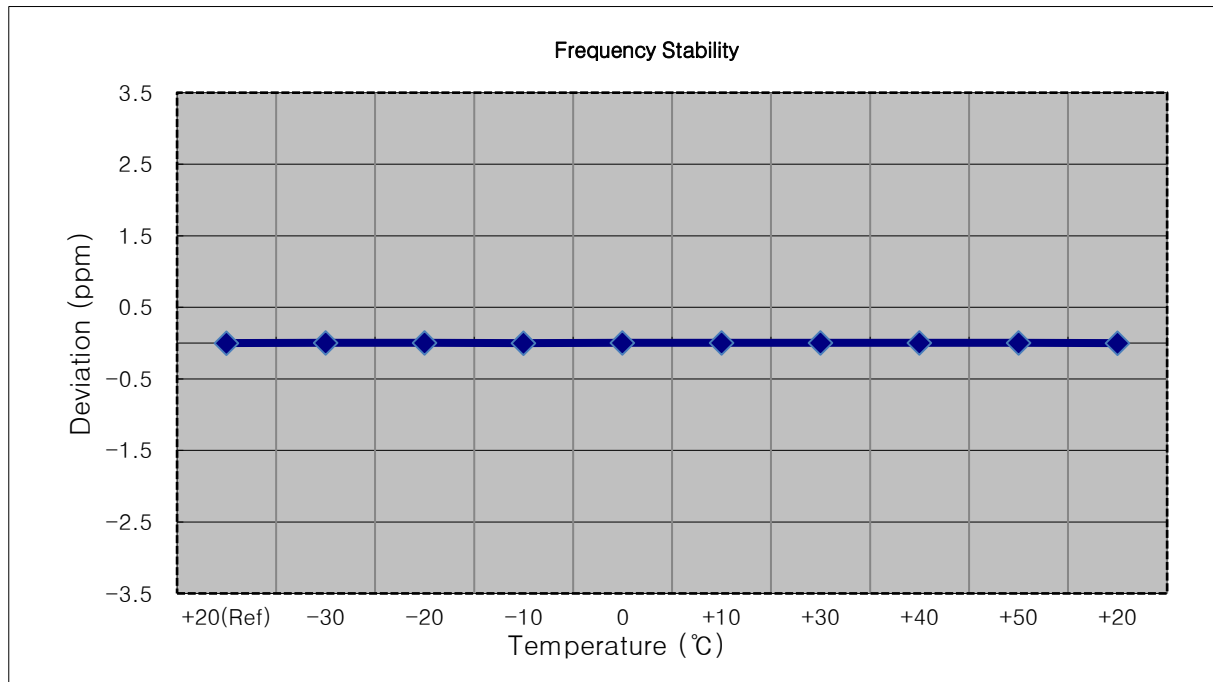


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1880 000 006	0.0	0.000 000	0.000
100 %		-30	1880 000 012	6.6	0.000 000	0.004
100 %		-20	1880 000 009	3.6	0.000 000	0.002
100 %		-10	1880 000 008	1.9	0.000 000	0.001
100 %		0	1880 000 011	5.4	0.000 000	0.003
100 %		+10	1880 000 010	3.9	0.000 000	0.002
100 %		+30	1880 000 011	5.7	0.000 000	0.003
100 %		+40	1880 000 010	4.1	0.000 000	0.002
100 %		+50	1880 000 012	6.1	0.000 000	0.003
Batt. Endpoint	3.300	+20	1880 000 012	6.0	0.000 000	0.003

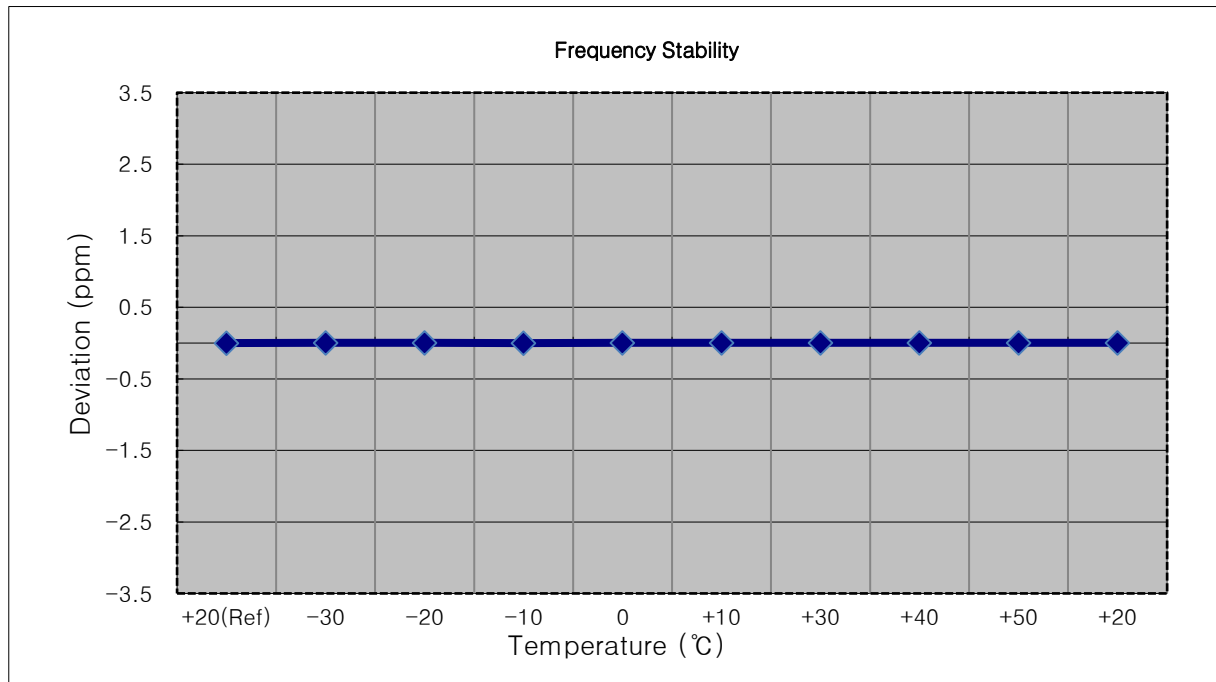


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1909,300,000 Hz
- ▣ CHANNEL: 19193 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1909 299 997	0.0	0.000 000	0.000
100 %		-30	1909 300 001	3.5	0.000 000	0.002
100 %		-20	1909 300 001	3.2	0.000 000	0.002
100 %		-10	1909 300 003	5.2	0.000 000	0.003
100 %		0	1909 300 002	4.6	0.000 000	0.002
100 %		+10	1909 299 994	-3.8	0.000 000	-0.002
100 %		+30	1909 300 002	4.7	0.000 000	0.002
100 %		+40	1909 299 992	-5.9	0.000 000	-0.003
100 %		+50	1909 300 002	4.3	0.000 000	0.002
Batt. Endpoint		3.300	+20	1909 300 002	4.6	0.000 000

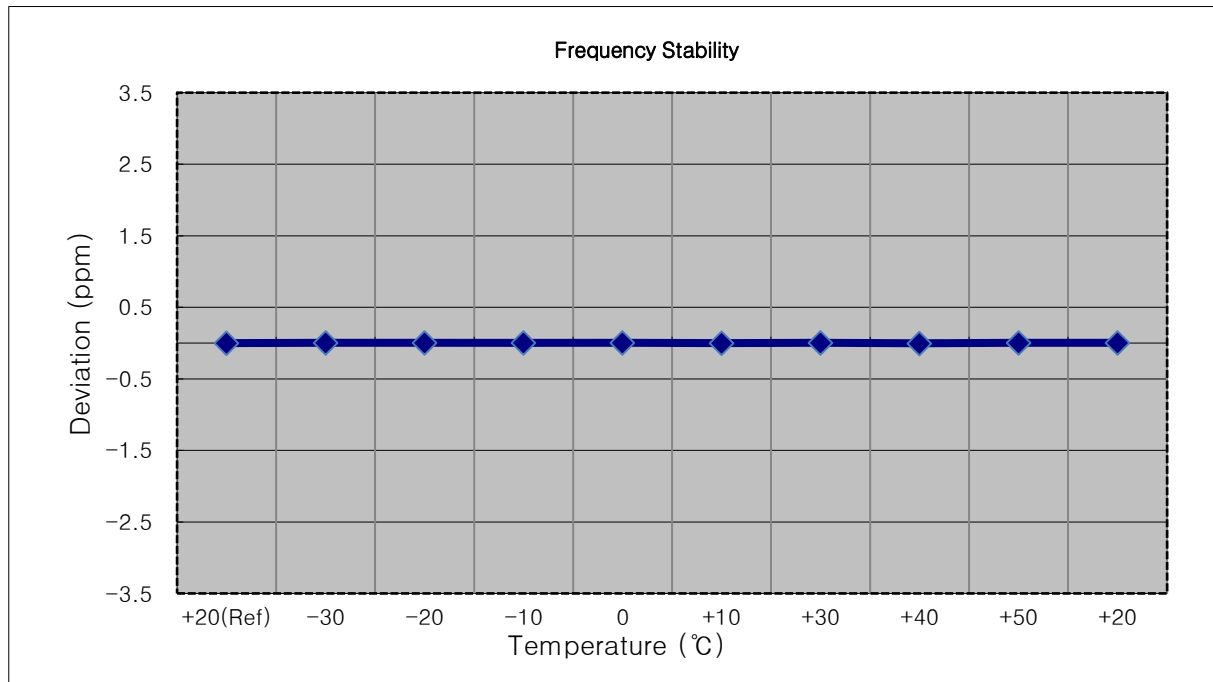


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1908,500,000 Hz
- ▣ CHANNEL: 19185 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1908 499 993	0.0	0.000 000	0.000
100 %		-30	1908 500 001	7.7	0.000 000	0.004
100 %		-20	1908 499 982	-11.7	-0.000 001	-0.006
100 %		-10	1908 500 002	8.5	0.000 000	0.004
100 %		0	1908 500 008	14.7	0.000 001	0.008
100 %		+10	1908 499 983	-10.2	-0.000 001	-0.005
100 %		+30	1908 500 004	10.8	0.000 001	0.006
100 %		+40	1908 500 004	11.0	0.000 001	0.006
100 %		+50	1908 499 985	-8.0	0.000 000	-0.004
Batt. Endpoint		3.300	+20	1908 499 982	-10.9	-0.000 001

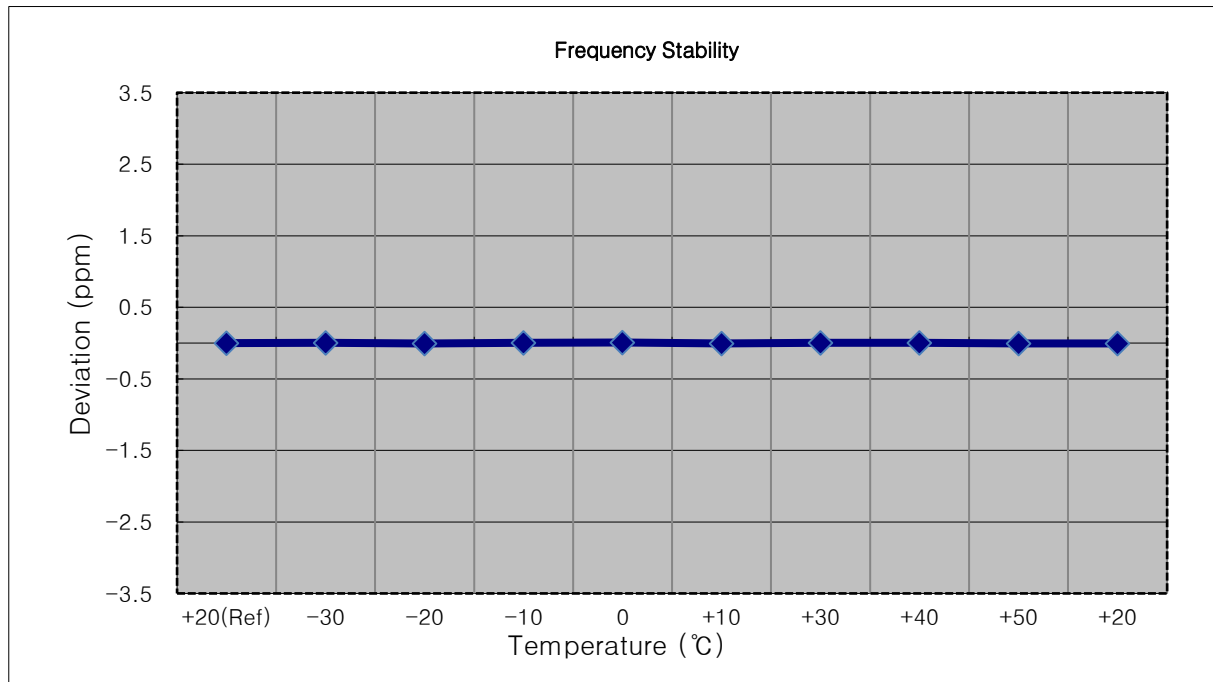


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1907,500,000 Hz
- ▣ CHANNEL: 19175 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1907 500 003	0.0	0.000 000	0.000
100 %		-30	1907 500 006	2.7	0.000 000	0.001
100 %		-20	1907 500 001	-2.0	0.000 000	-0.001
100 %		-10	1907 500 006	2.8	0.000 000	0.001
100 %		0	1907 500 007	3.7	0.000 000	0.002
100 %		+10	1907 500 000	-3.4	0.000 000	-0.002
100 %		+30	1907 500 008	4.3	0.000 000	0.002
100 %		+40	1907 500 007	3.8	0.000 000	0.002
100 %		+50	1907 500 006	2.7	0.000 000	0.001
Batt. Endpoint	3.300	+20	1907 500 007	3.2	0.000 000	0.002

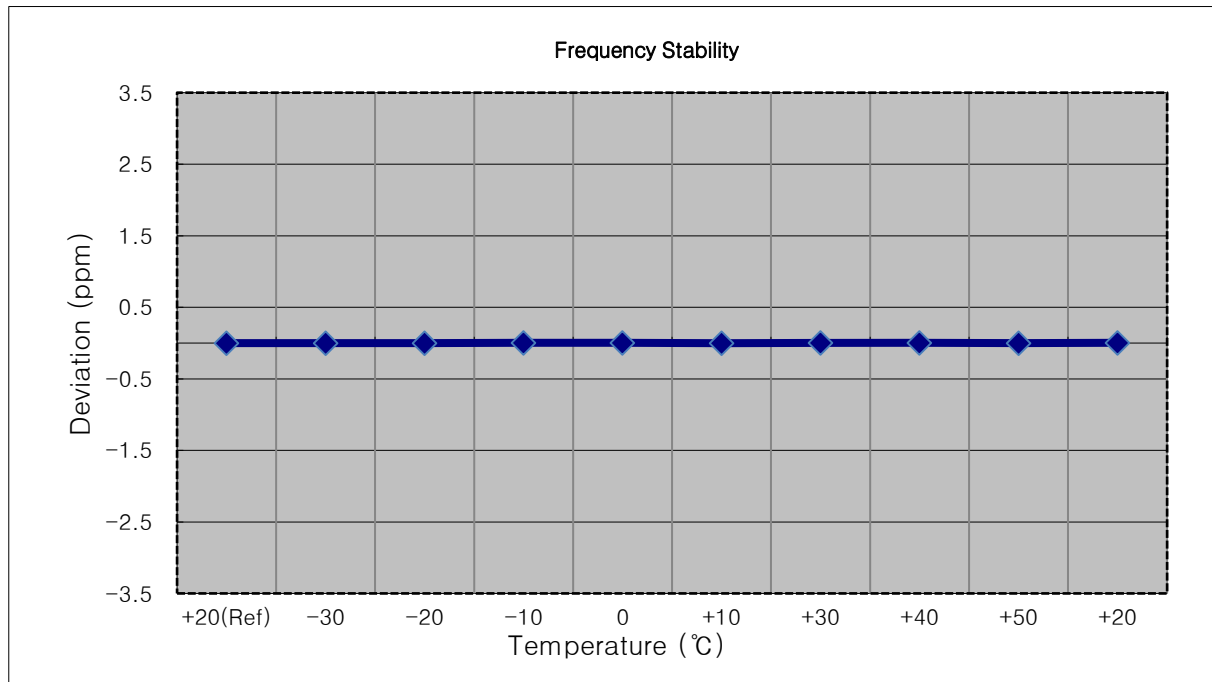


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1905,000,000 Hz
- ▣ CHANNEL: 19150 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1904 999 993	0.0	0.000 000	0.000
100 %		-30	1904 999 989	-4.5	0.000 000	-0.002
100 %		-20	1904 999 987	-6.6	0.000 000	-0.003
100 %		-10	1904 999 988	-5.5	0.000 000	-0.003
100 %		0	1904 999 986	-7.6	0.000 000	-0.004
100 %		+10	1904 999 986	-7.0	0.000 000	-0.004
100 %		+30	1904 999 985	-8.5	0.000 000	-0.004
100 %		+40	1904 999 989	-4.9	0.000 000	-0.003
100 %		+50	1904 999 988	-5.5	0.000 000	-0.003
Batt. Endpoint	3.300	+20	1904 999 990	-3.8	0.000 000	-0.002

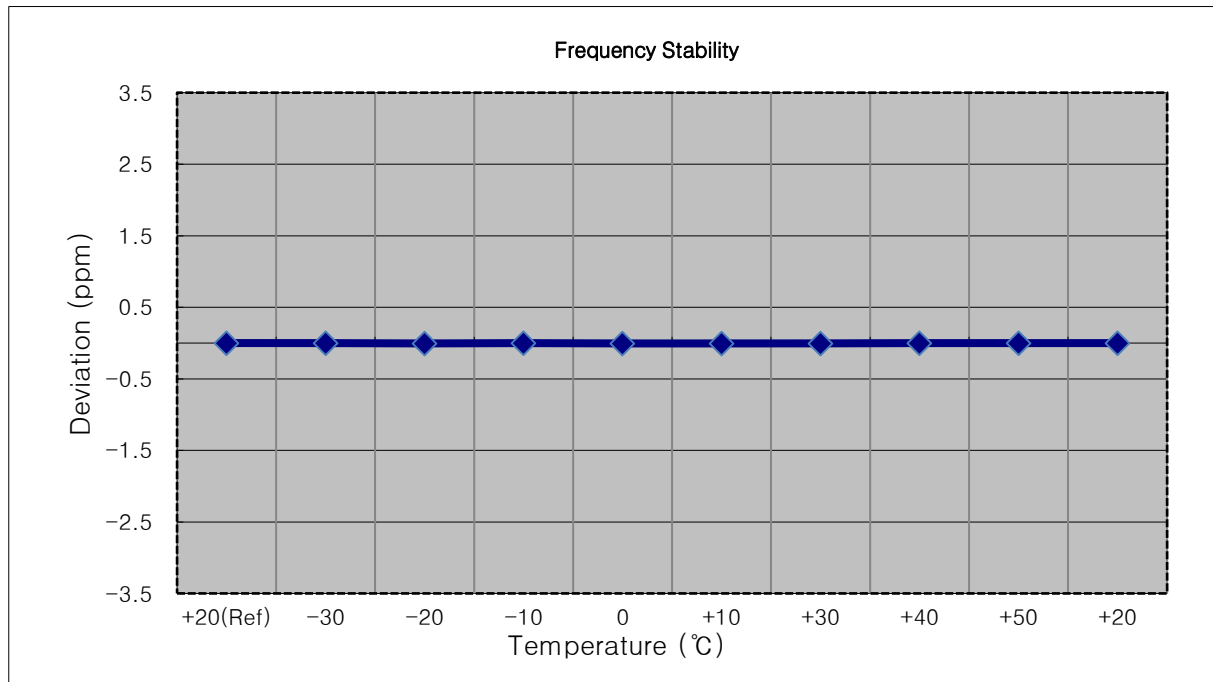


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1902,500,000 Hz
- ▣ CHANNEL: 19125 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1902 499 993	0.0	0.000 000	0.000
100 %		-30	1902 499 987	-6.3	0.000 000	-0.003
100 %		-20	1902 499 986	-6.8	0.000 000	-0.004
100 %		-10	1902 499 985	-7.7	0.000 000	-0.004
100 %		0	1902 499 987	-5.9	0.000 000	-0.003
100 %		+10	1902 499 986	-6.7	0.000 000	-0.004
100 %		+30	1902 499 988	-5.2	0.000 000	-0.003
100 %		+40	1902 499 987	-6.2	0.000 000	-0.003
100 %		+50	1902 499 988	-4.7	0.000 000	-0.002
Batt. Endpoint	3.300	+20	1902 499 987	-5.6	0.000 000	-0.003

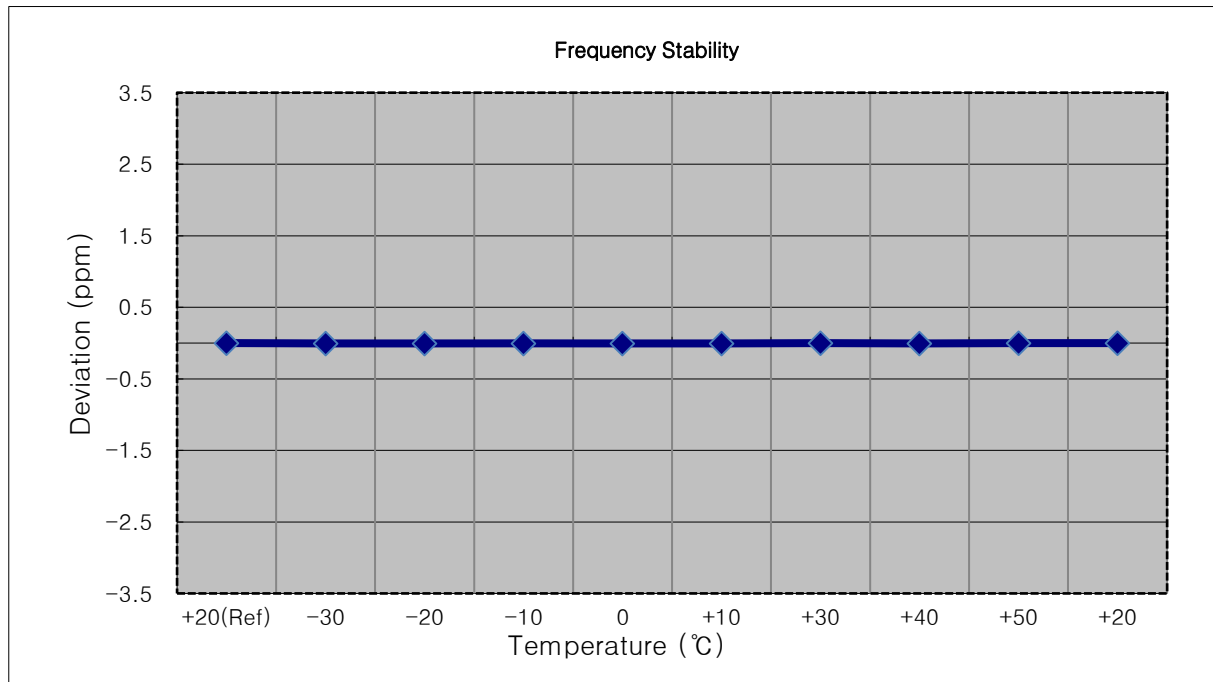

- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1900,000,000 Hz
- ▣ CHANNEL: 19100 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1899 999 992	0.0	0.000 000	0.000
100 %		-30	1899 999 983	-8.5	0.000 000	-0.004
100 %		-20	1899 999 984	-7.7	0.000 000	-0.004
100 %		-10	1899 999 982	-9.1	0.000 000	-0.005
100 %		0	1899 999 984	-7.4	0.000 000	-0.004
100 %		+10	1899 999 983	-8.7	0.000 000	-0.005
100 %		+30	1899 999 983	-8.5	0.000 000	-0.004
100 %		+40	1899 999 984	-8.0	0.000 000	-0.004
100 %		+50	1899 999 983	-8.3	0.000 000	-0.004
Batt. Endpoint	3.300	+20	1899 999 984	-7.3	0.000 000	-0.004

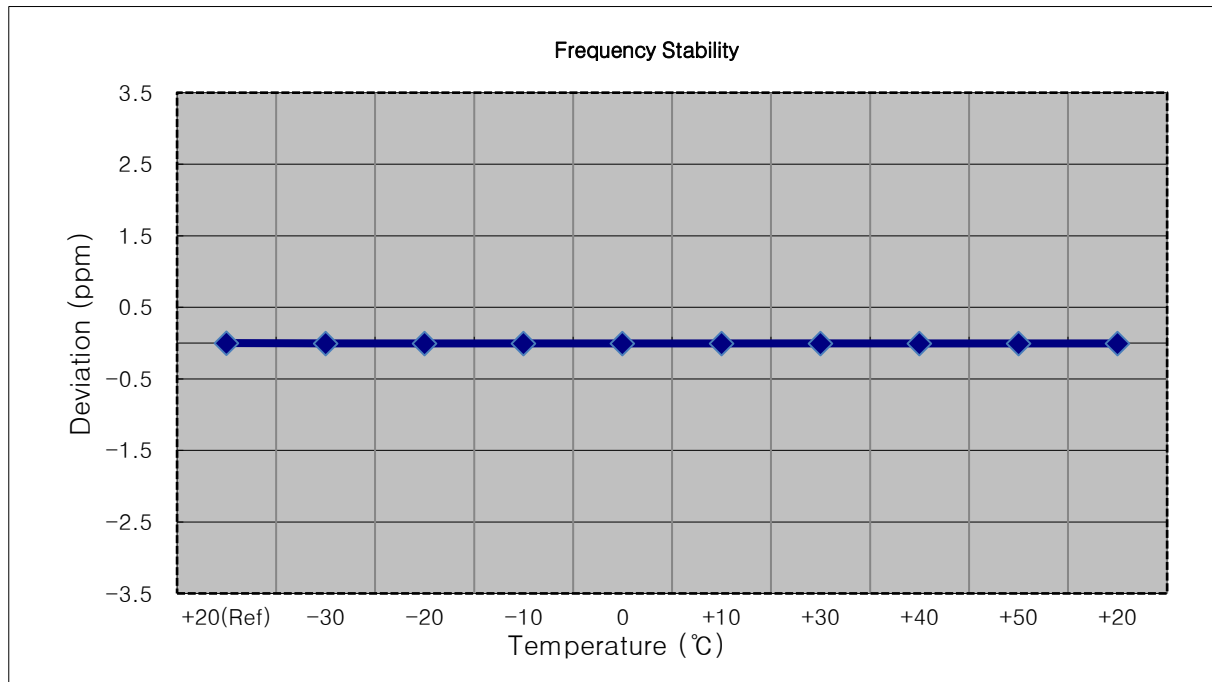



## 8.8 UPLINK CARRIER AGGREGATION

### Test Note

1. All tests were evaluated for the two bands using various combinations of RB size, RB offset, modulation, and channel bandwidth.
2. All modes of operation were investigated and the worst case configuration results are reported in this section.  
Please refer to the table below.
3. The worst case is reported with the modulations, RB sizes and offsets.

(Modulation: QPSK, RB: 1, RB Offset: 25)

### Radiated Spurious Emissions

PCC	SCC	PCC		SCC	
		BW(MHz)	Channel	BW(MHz)	Channel
2A	4A(Sub2 Ant)	10	18650	10	20000

**8.8.1 RADIATED SPURIOUS EMISSIONS**

2A(PCC)-4A(SCC)

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit (dBm)
3 710.00	-54.47	12.30	-59.57	3.14	H	-50.41	-13.00
5 565.00	-53.54	13.30	-51.45	3.90	V	-42.05	-13.00
7 420.00	-55.30	10.80	-45.14	4.57	H	-38.91	-13.00
9 275.00	-58.68	10.45	-42.35	5.35	V	-37.25	-13.00
11 130.00	-57.12	11.16	-37.88	5.83	V	-32.55	-13.00

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit (dBm)
3 430.00	-54.98	12.54	-61.38	3.02	V	-51.86	-13.00
5 145.00	-44.94	12.29	-42.69	3.70	H	-34.10	-13.00
6 860.00	-56.10	11.98	-49.53	4.38	V	-41.93	-13.00
8 575.00	-58.23	11.45	-45.59	5.06	V	-39.20	-13.00
10 290.00	-58.50	11.50	-40.49	5.81	H	-34.80	-13.00

## 9. TEST PLOTS

BW1.4 M\_BandEdge\_Lowest Channel\_QPSK\_FullRB(1)




BW1.4 M\_BandEdge\_Lowest Channel\_QPSK\_FullRB(2)




BW1.4 M\_BandEdge\_Highest Channel\_QPSK\_FullIRB(1)



BW1.4 M\_BandEdge\_Highest Channel\_QPSK\_FullIRB(2)

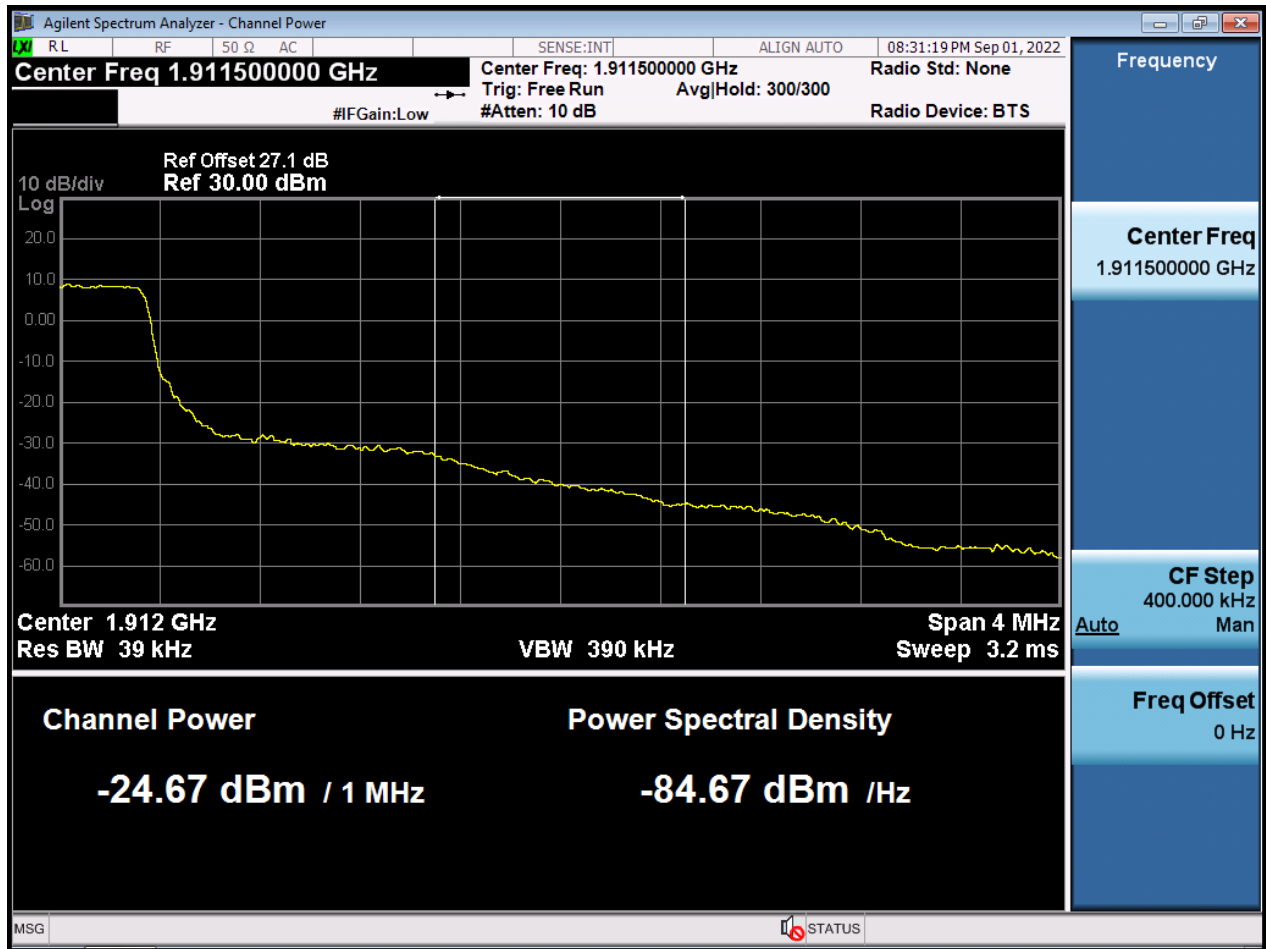


BW1.4 M\_BandEdge\_Lowest Channel\_QPSK\_1RB

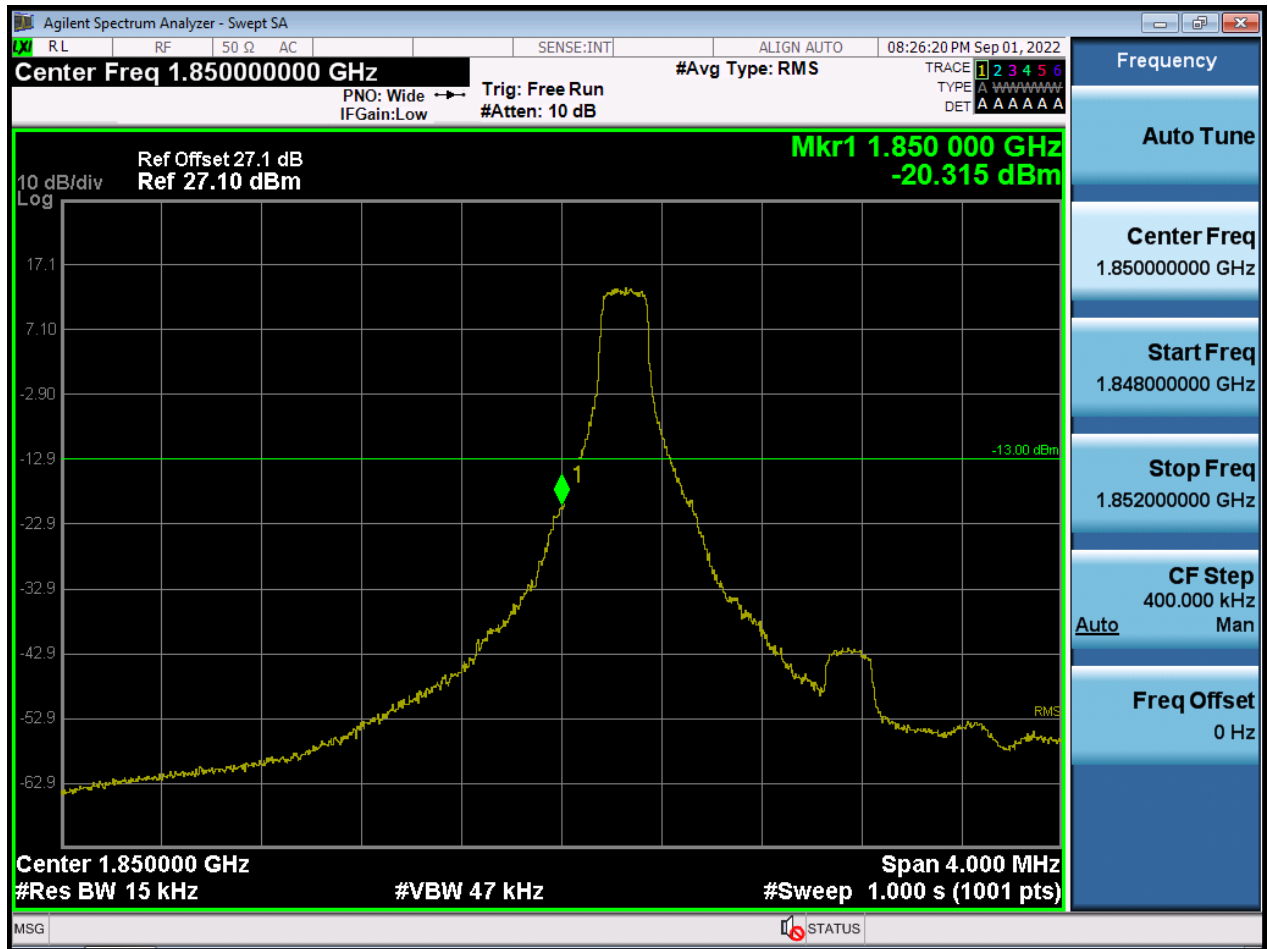




BW1.4 M\_BandEdge\_Highest Channel\_QPSK\_1RB

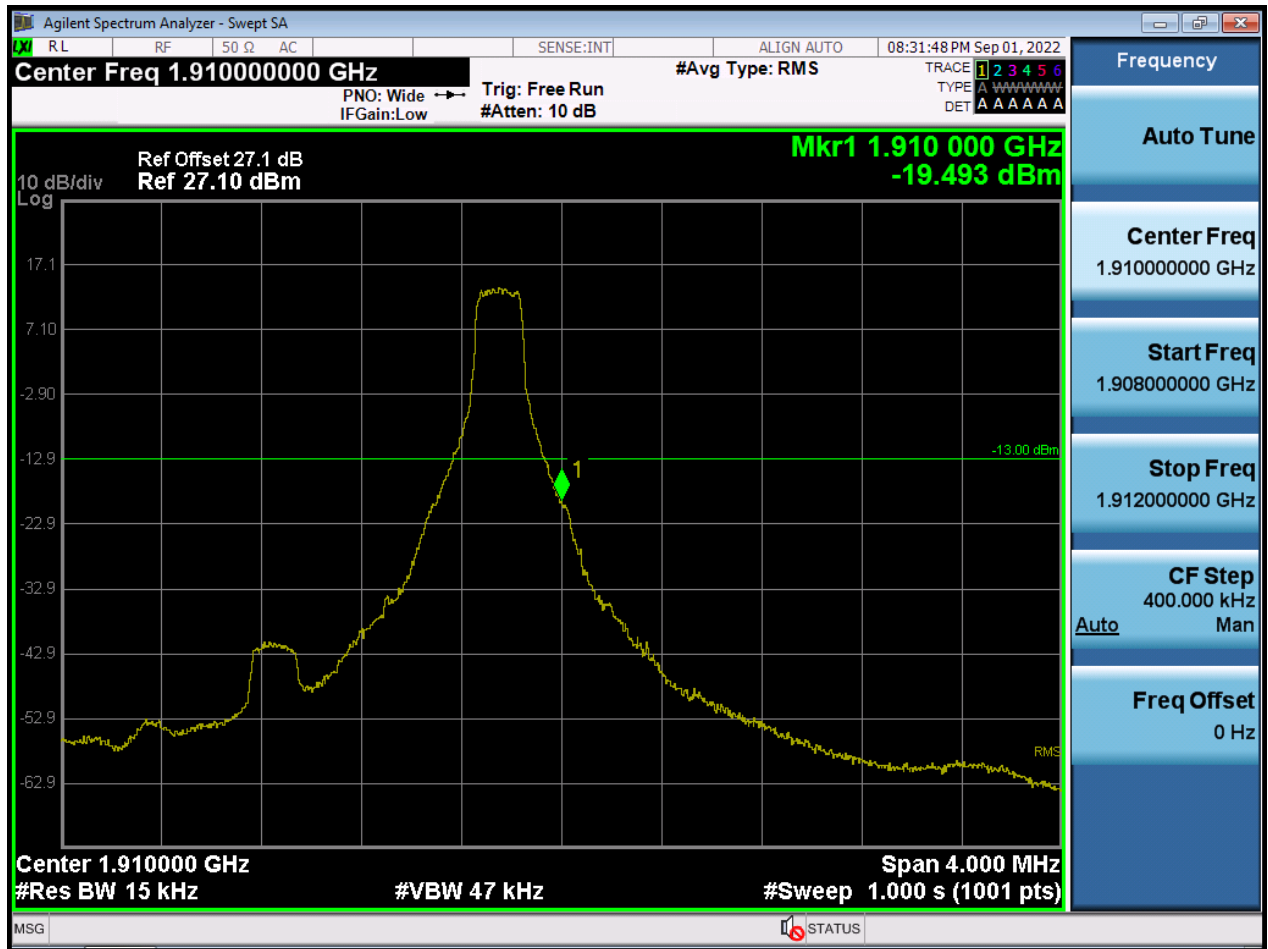

BW3 M\_BandEdge\_Lowest Channel\_QPSK\_FullIRB(1)




BW3 M\_BandEdge\_Lowest Channel\_QPSK\_FullIRB(2)

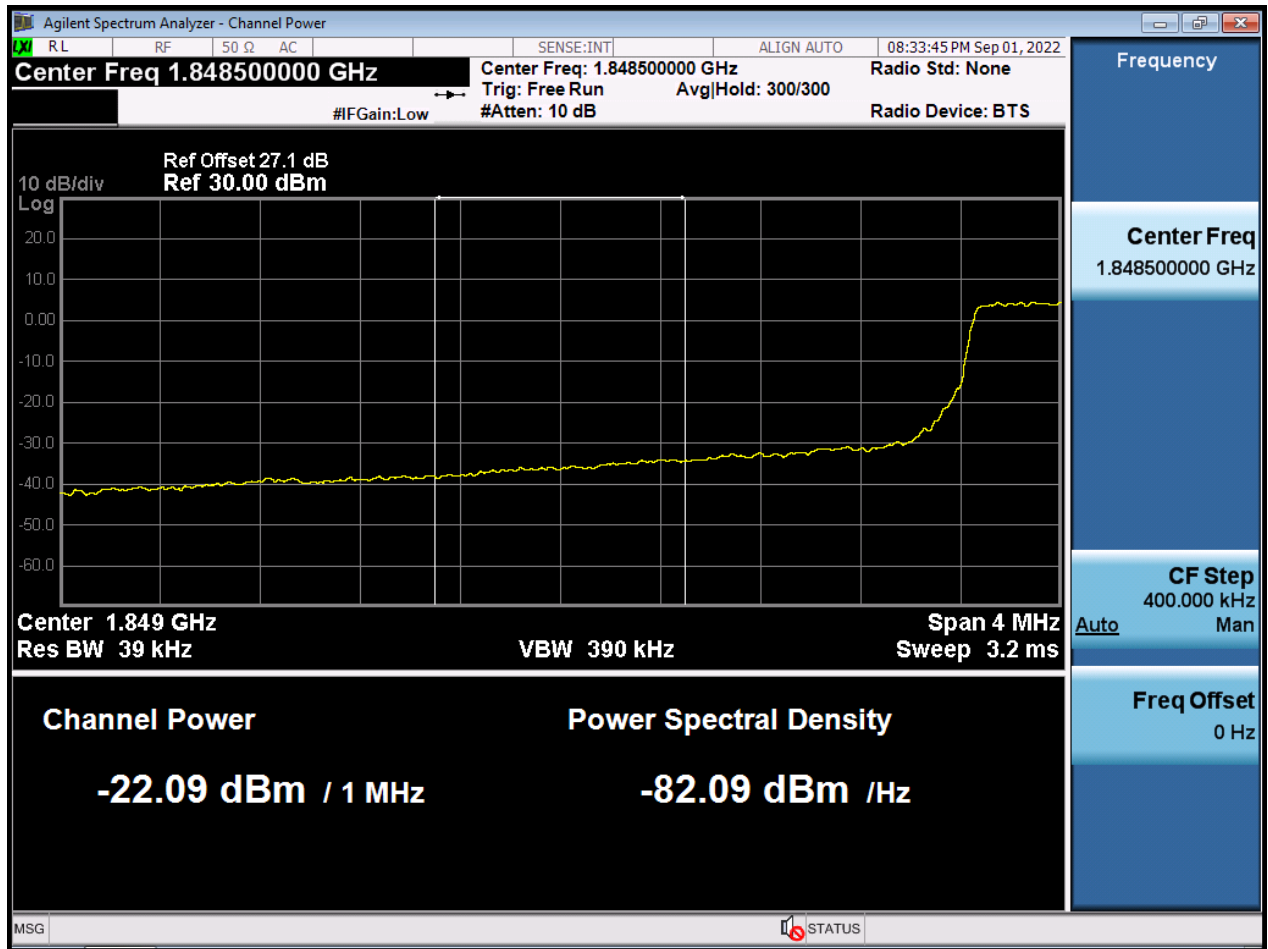


BW3 M\_BandEdge\_Highest Channel\_QPSK\_FullRB(1)




BW3 M\_BandEdge\_Highest Channel\_QPSK\_FullRB(2)

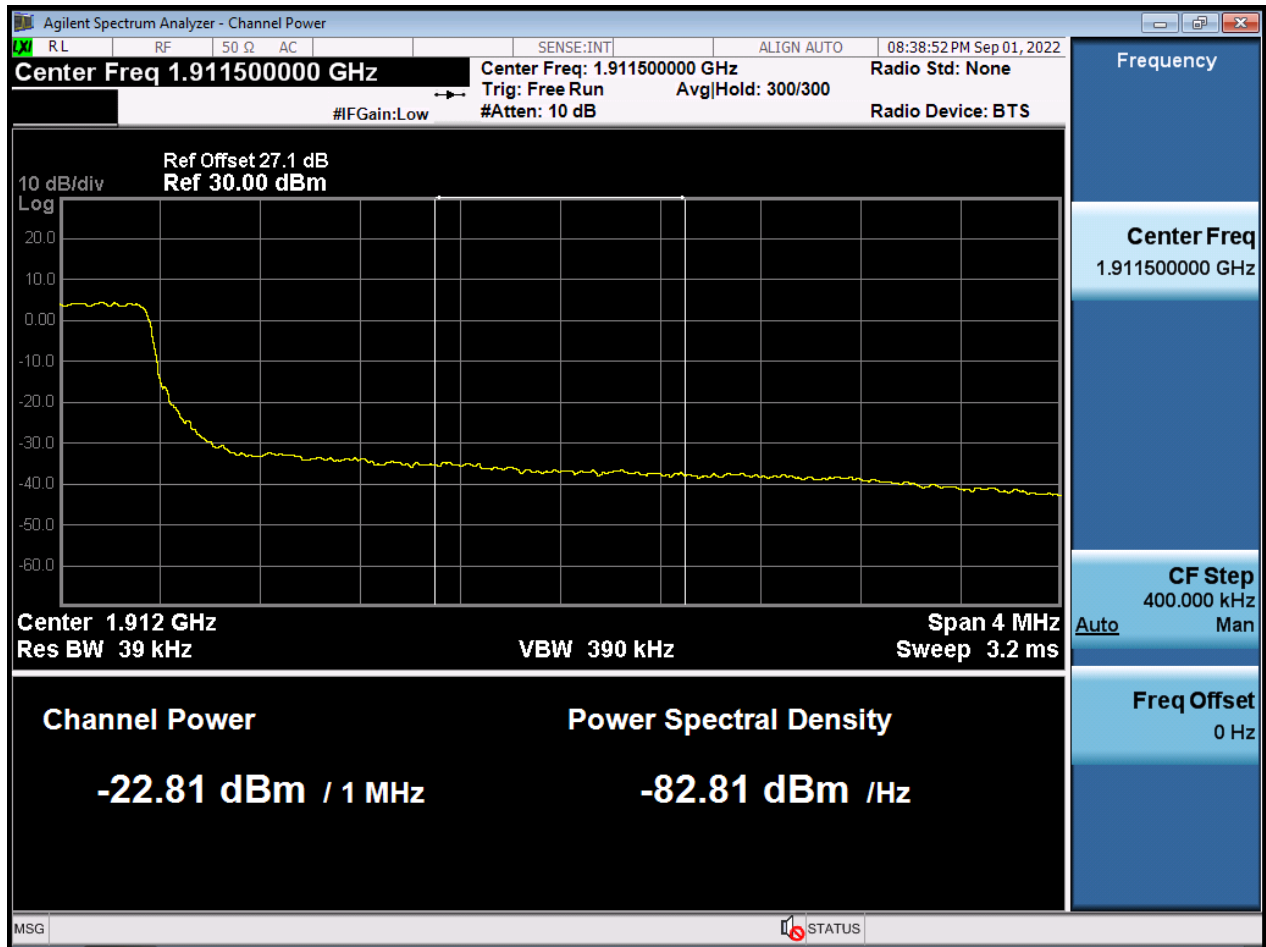

BW3 M\_BandEdge\_Lowest Channel\_QPSK\_1RB

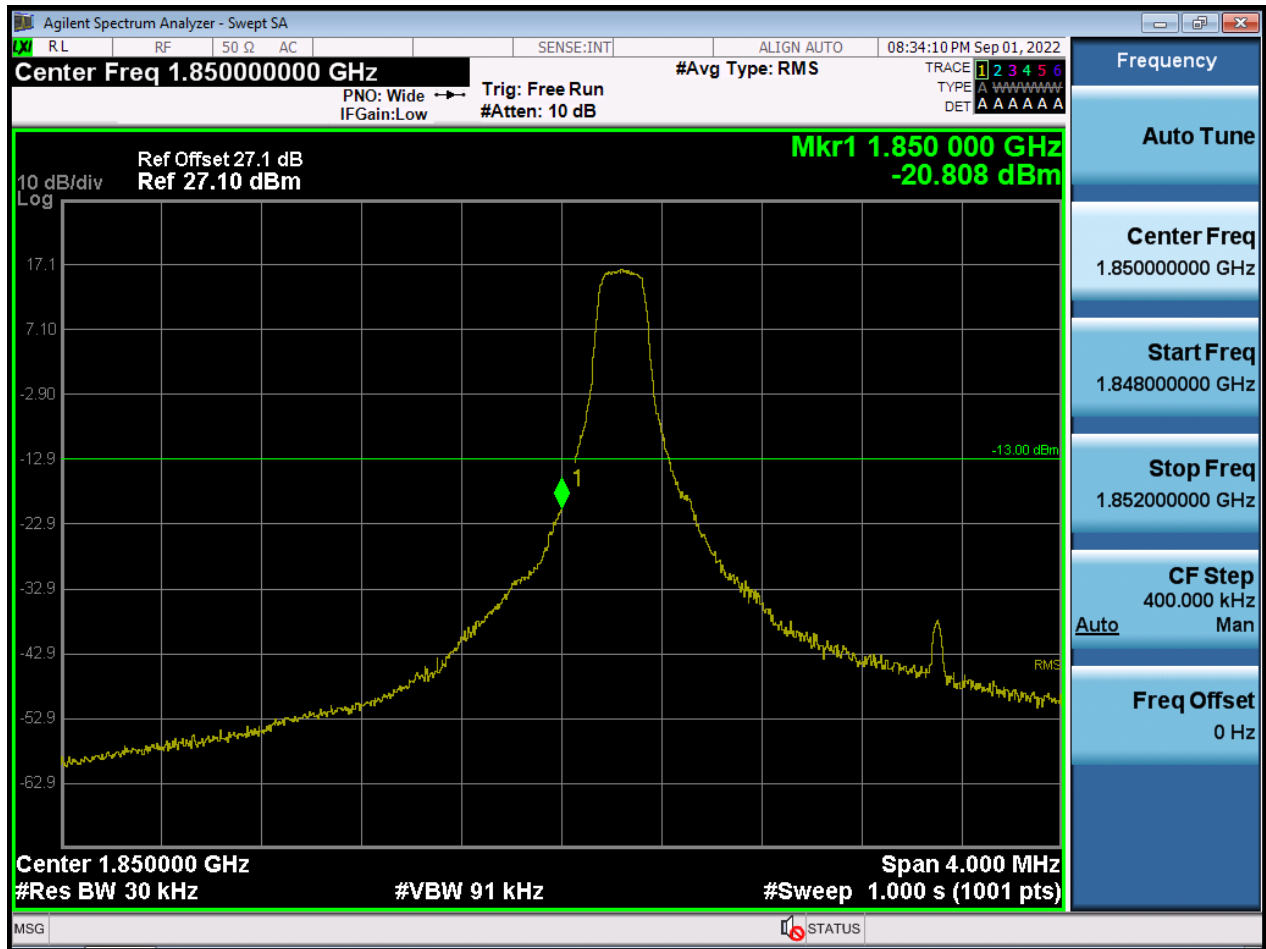

BW3 M\_BandEdge\_Highest Channel\_QPSK\_1RB

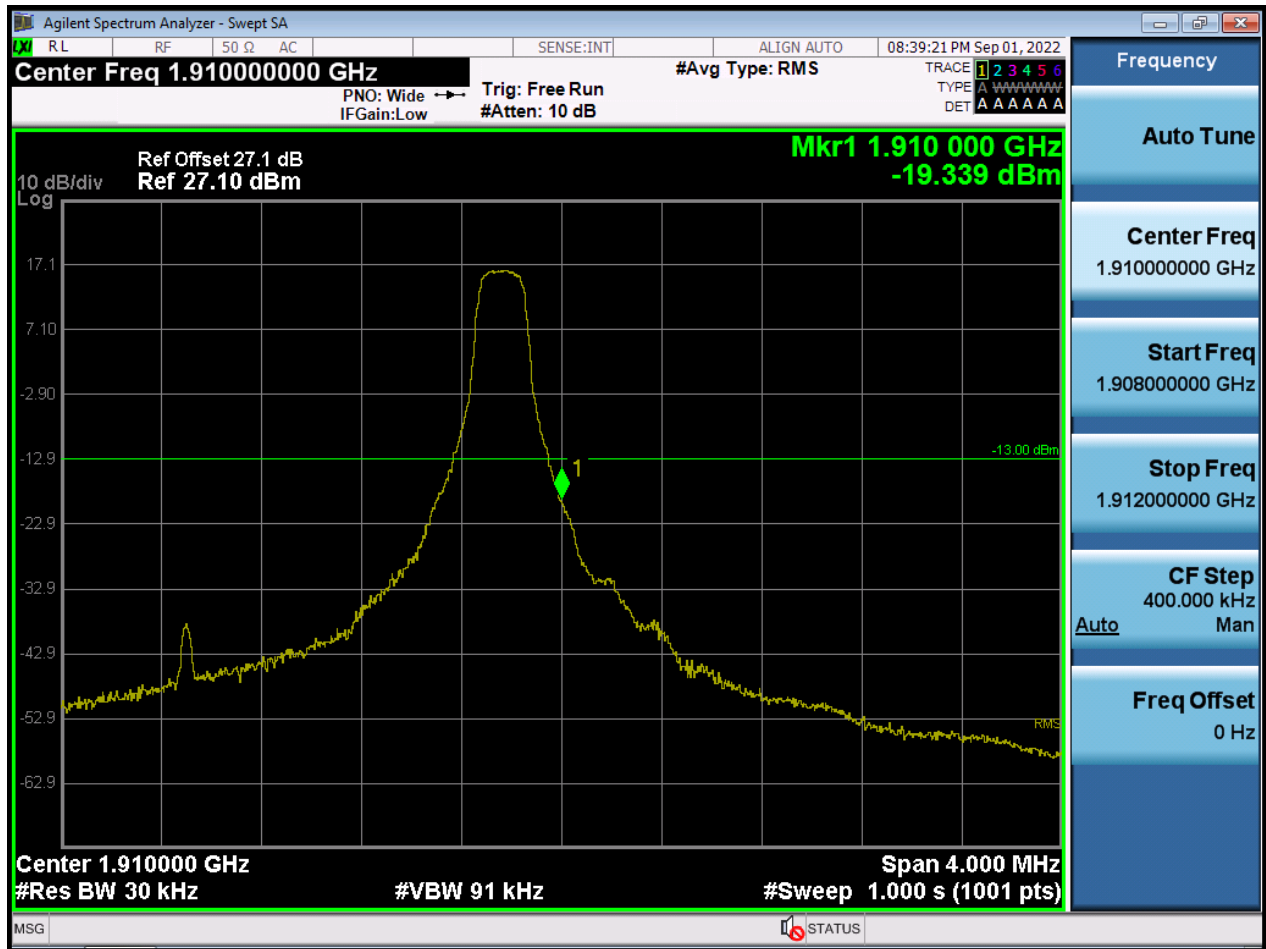

BW5 M\_BandEdge\_Lowest Channel\_QPSK\_FullIRB(1)






BW5 M\_BandEdge\_Lowest Channel\_QPSK\_FullIRB(2)




BW5 M\_BandEdge\_Highest Channel\_QPSK\_FullRB(1)




BW5 M\_BandEdge\_Highest Channel\_QPSK\_FullRB(2)

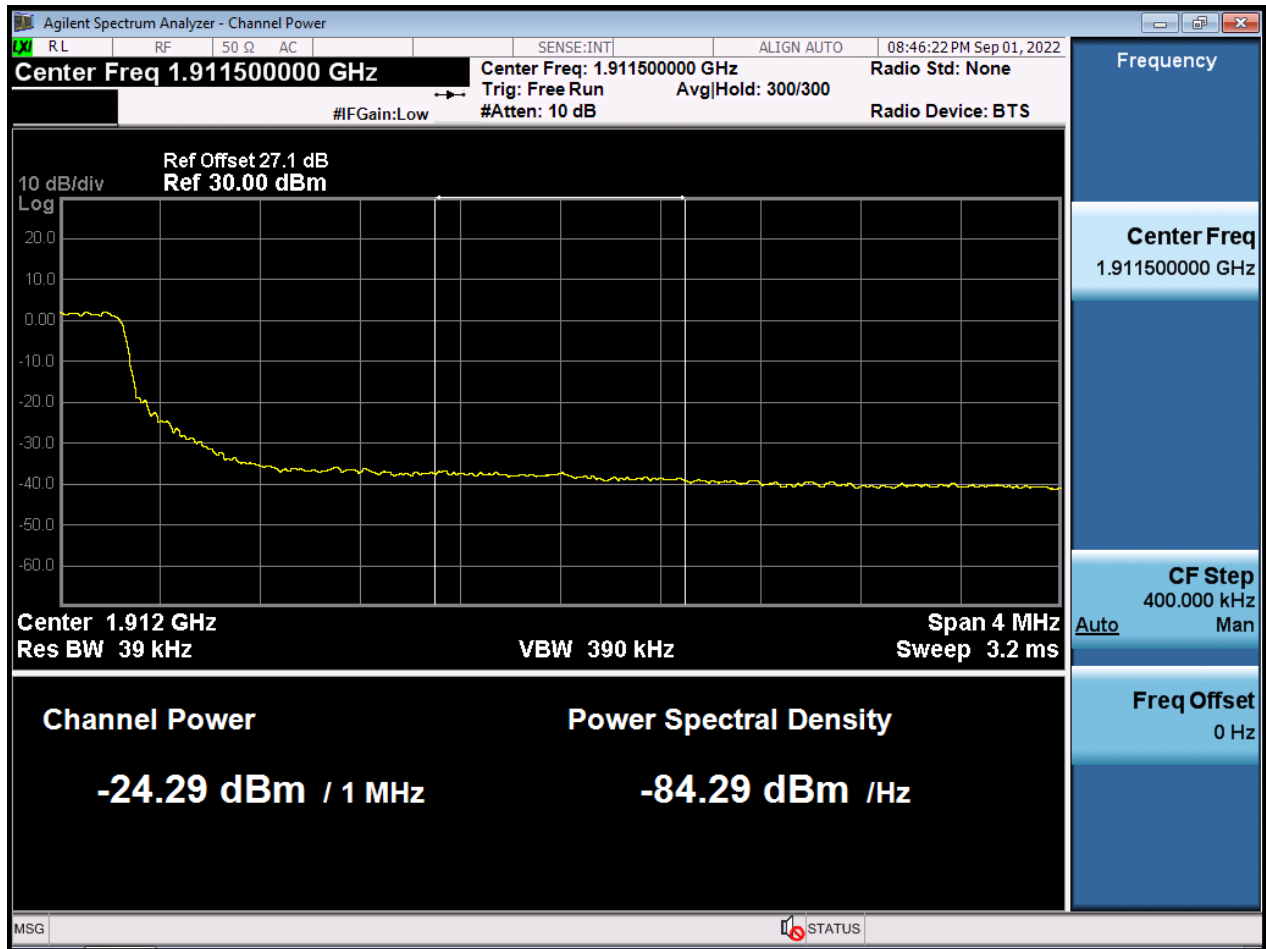

BW5 M\_BandEdge\_Lowest Channel\_QPSK\_1RB

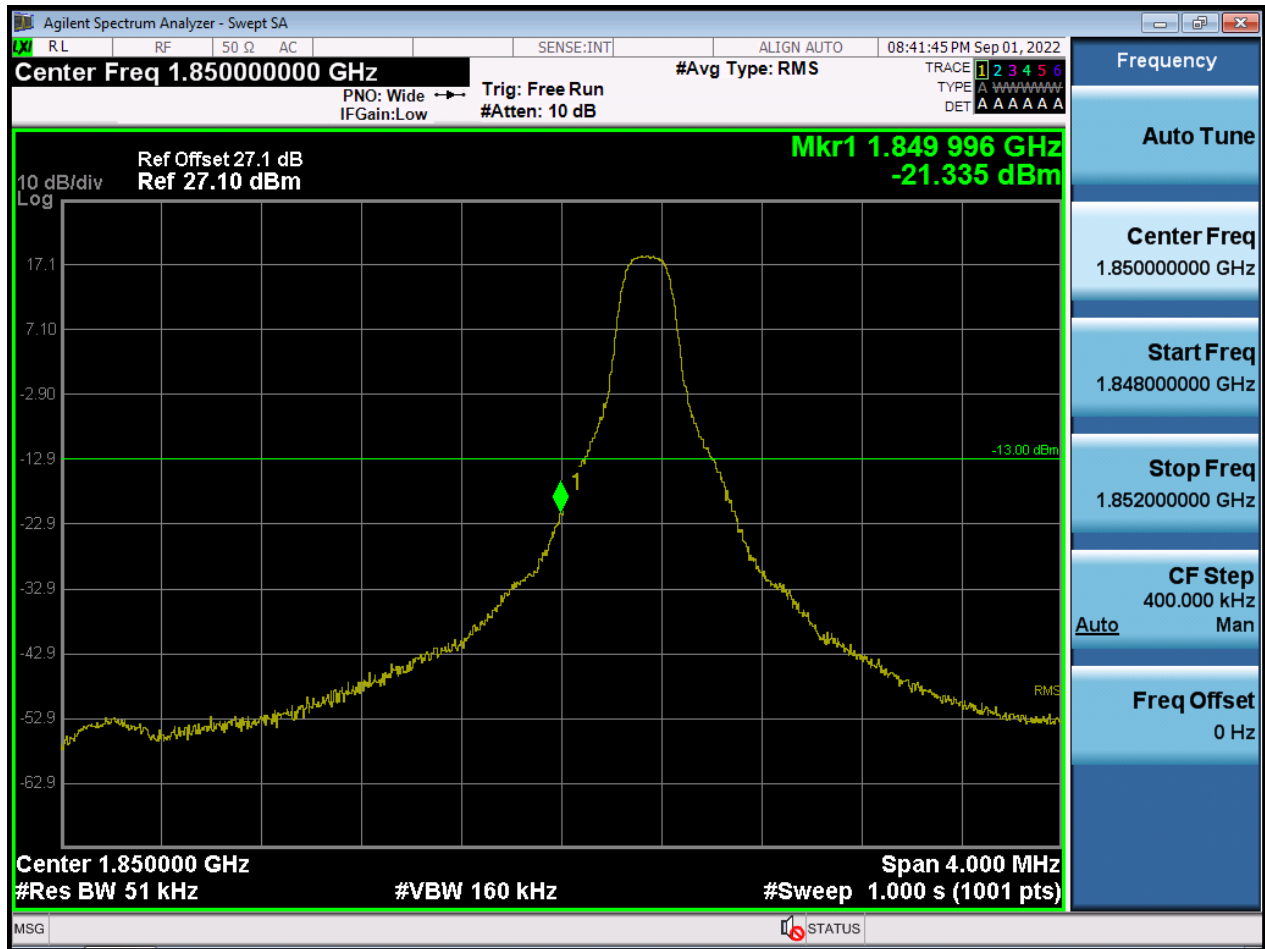


BW5 M\_BandEdge\_Highest Channel\_QPSK\_1RB

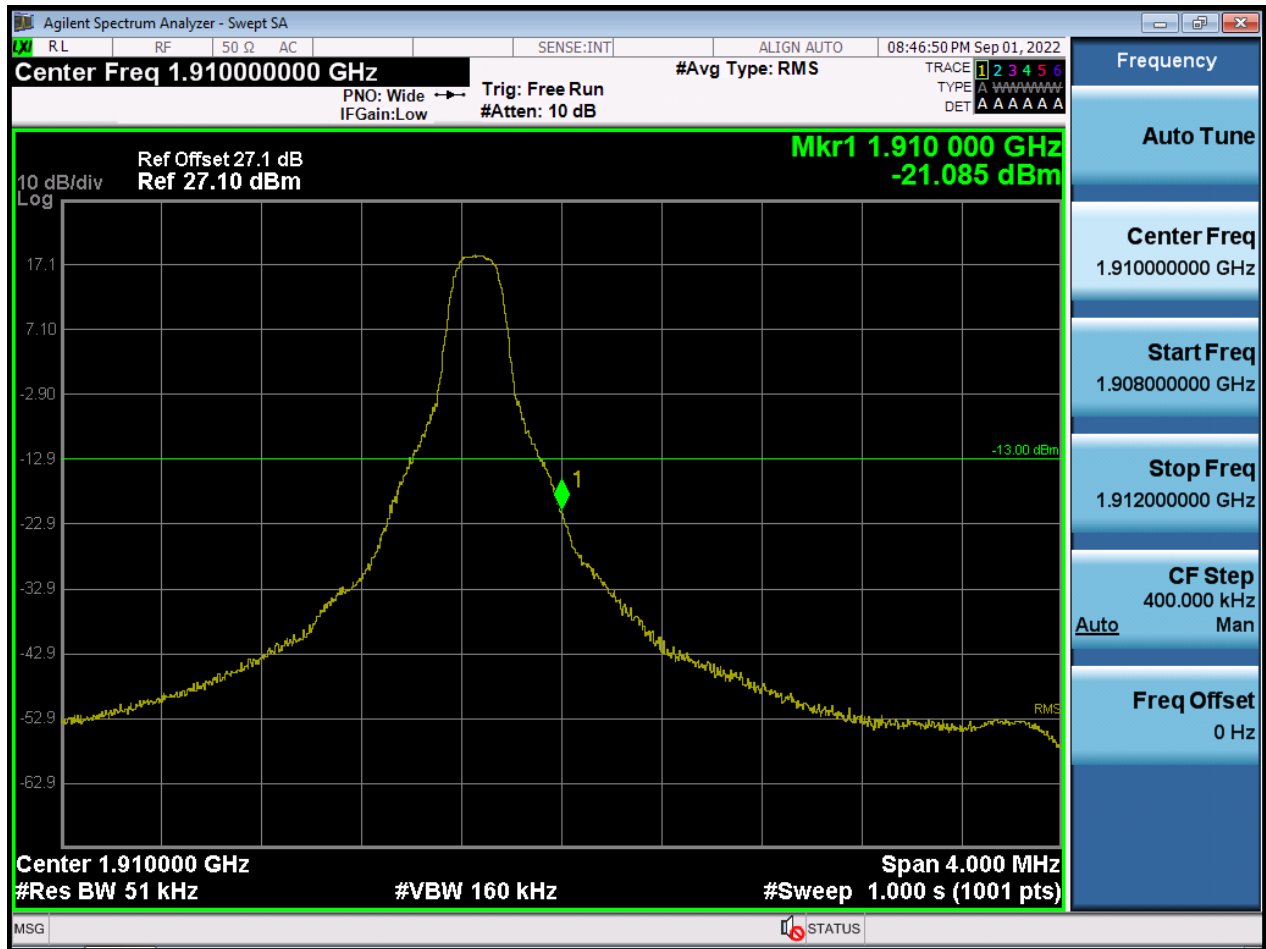

BW10 M\_BandEdge\_Lowest Channel\_QPSK\_FullIRB(1)



BW10 M\_BandEdge\_Lowest Channel\_QPSK\_FullIRB(2)

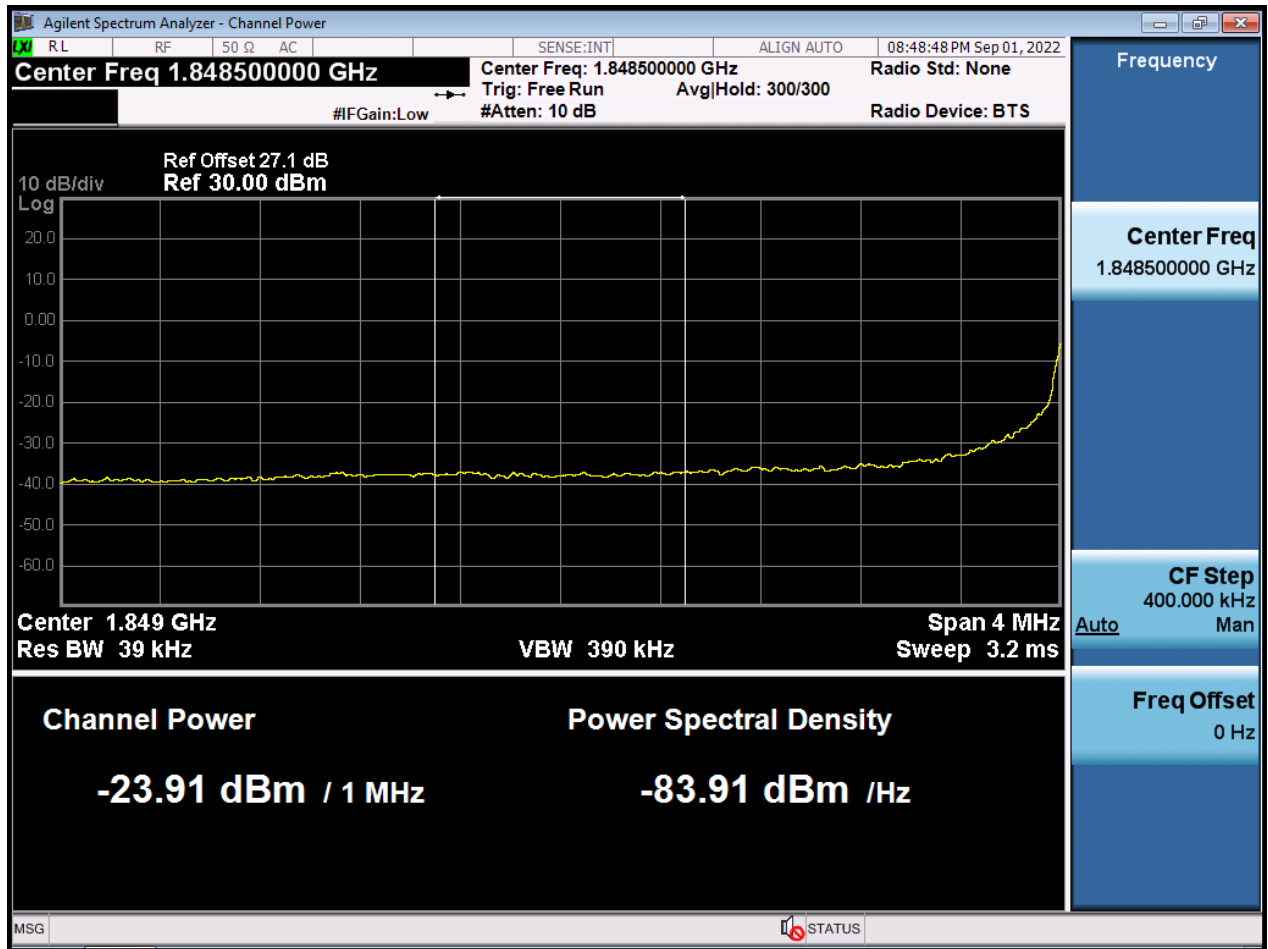


BW10 M\_BandEdge\_Highest Channel\_QPSK\_FullRB(1)






BW10 M\_BandEdge\_Highest Channel\_QPSK\_FullRB(2)

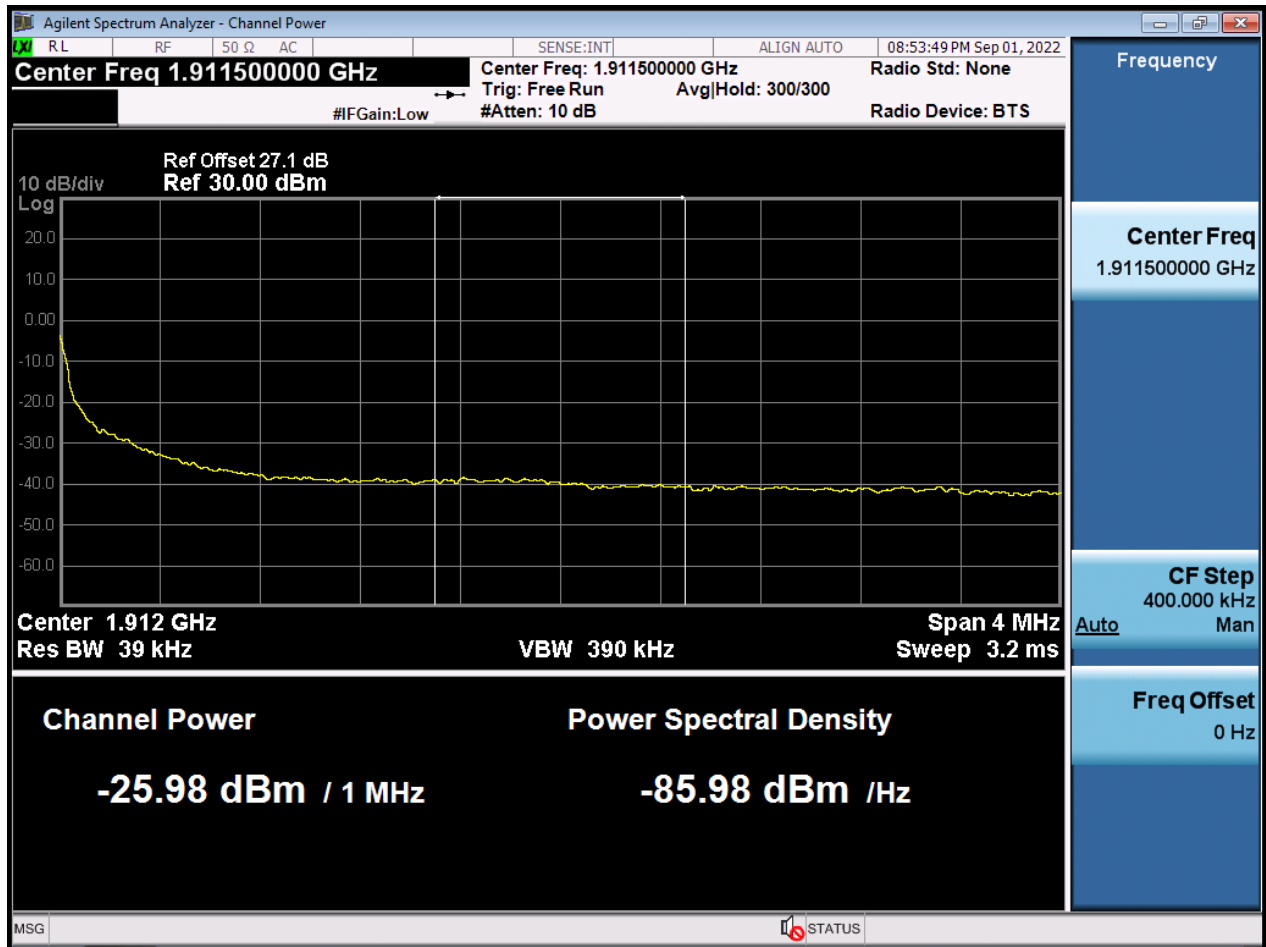

BW10 M\_BandEdge\_Lowest Channel\_QPSK\_1RB




BW10 M\_BandEdge\_Highest Channel\_QPSK\_1RB

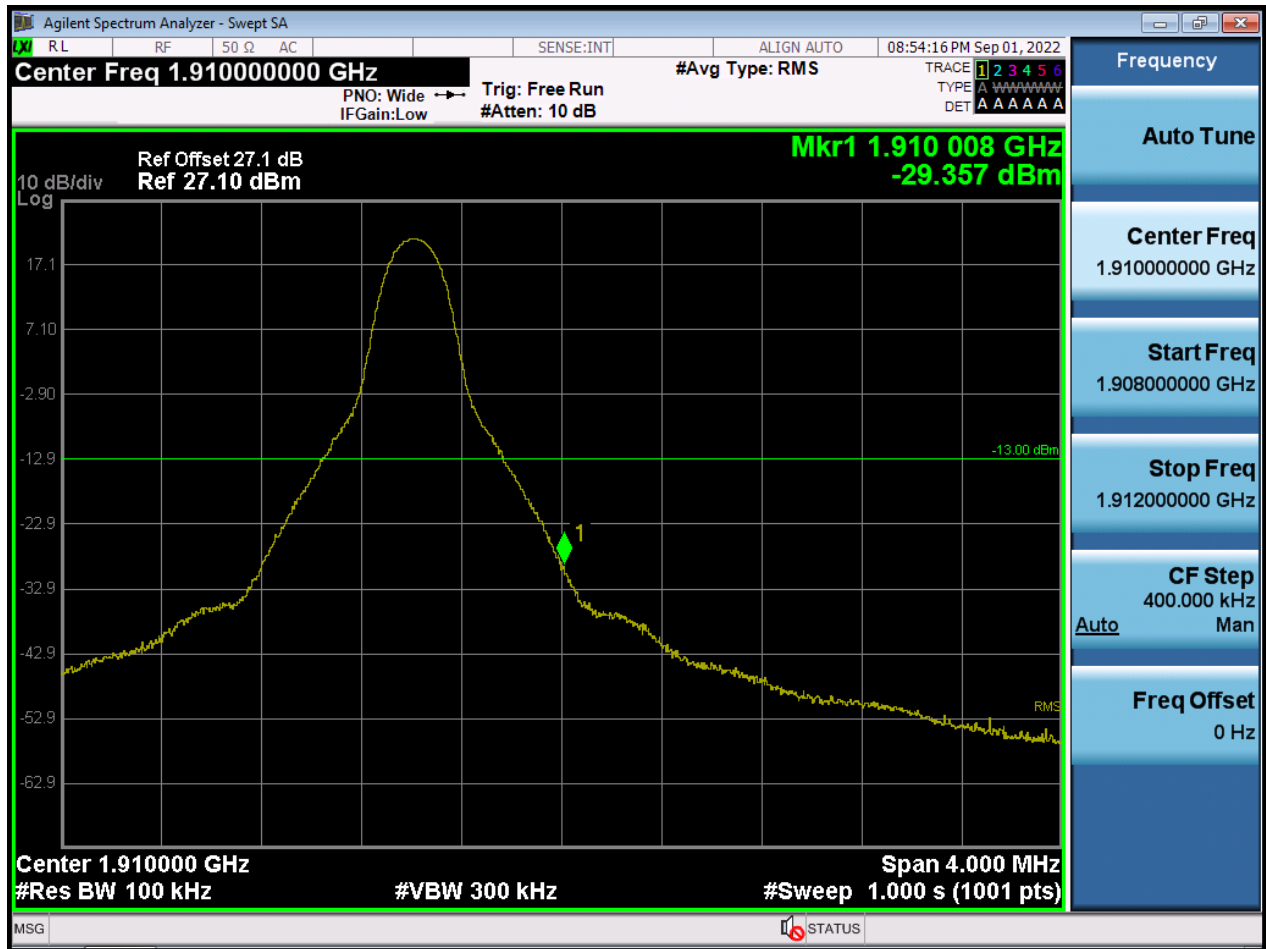

BW15 M\_BandEdge\_Lowest Channel\_QPSK\_FullIRB(1)




BW15 M\_BandEdge\_Lowest Channel\_QPSK\_FullIRB(2)

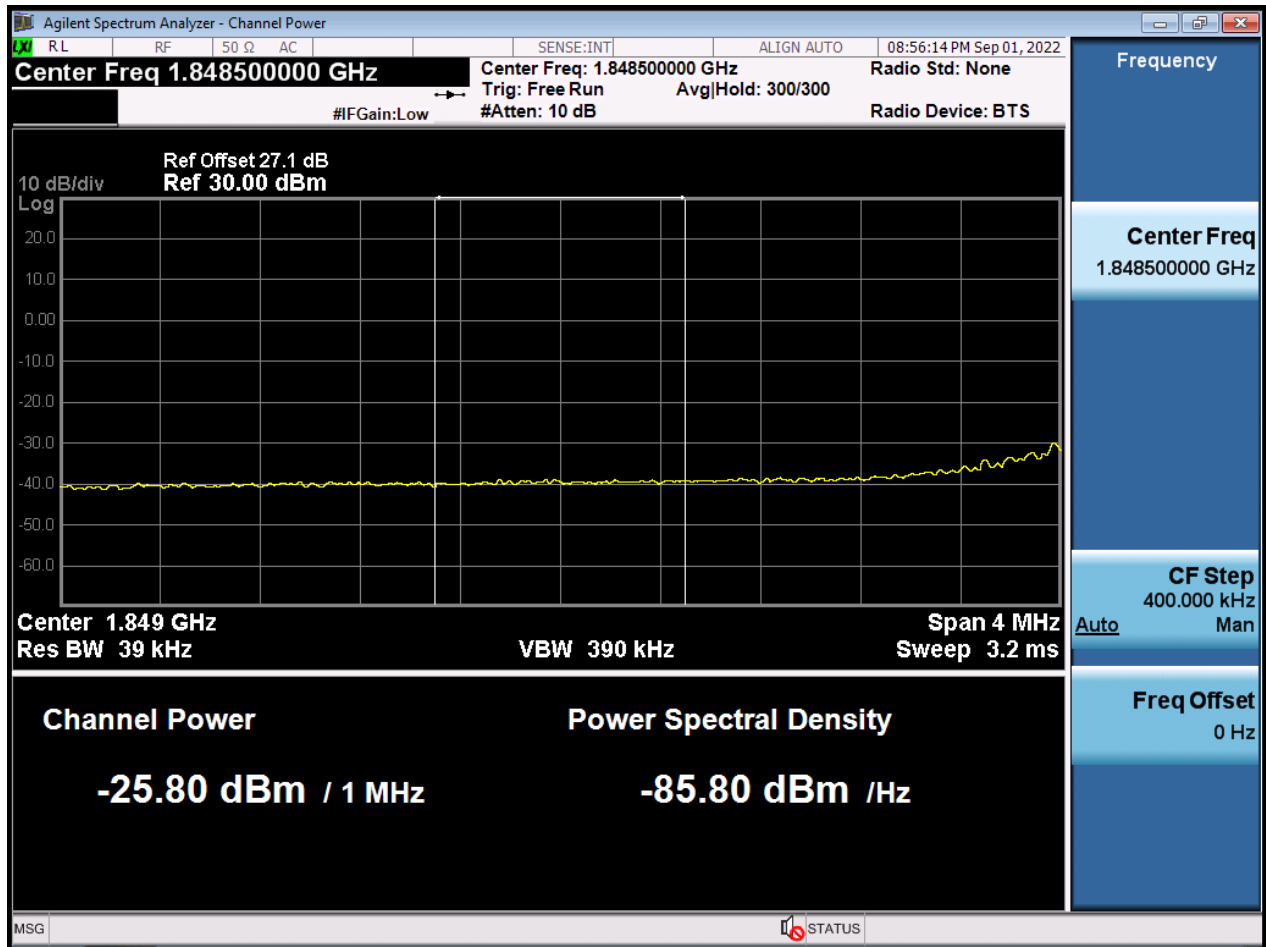

BW15 M\_BandEdge\_Highest Channel\_QPSK\_FullRB(1)



BW15 M\_BandEdge\_Highest Channel\_QPSK\_FullRB(2)

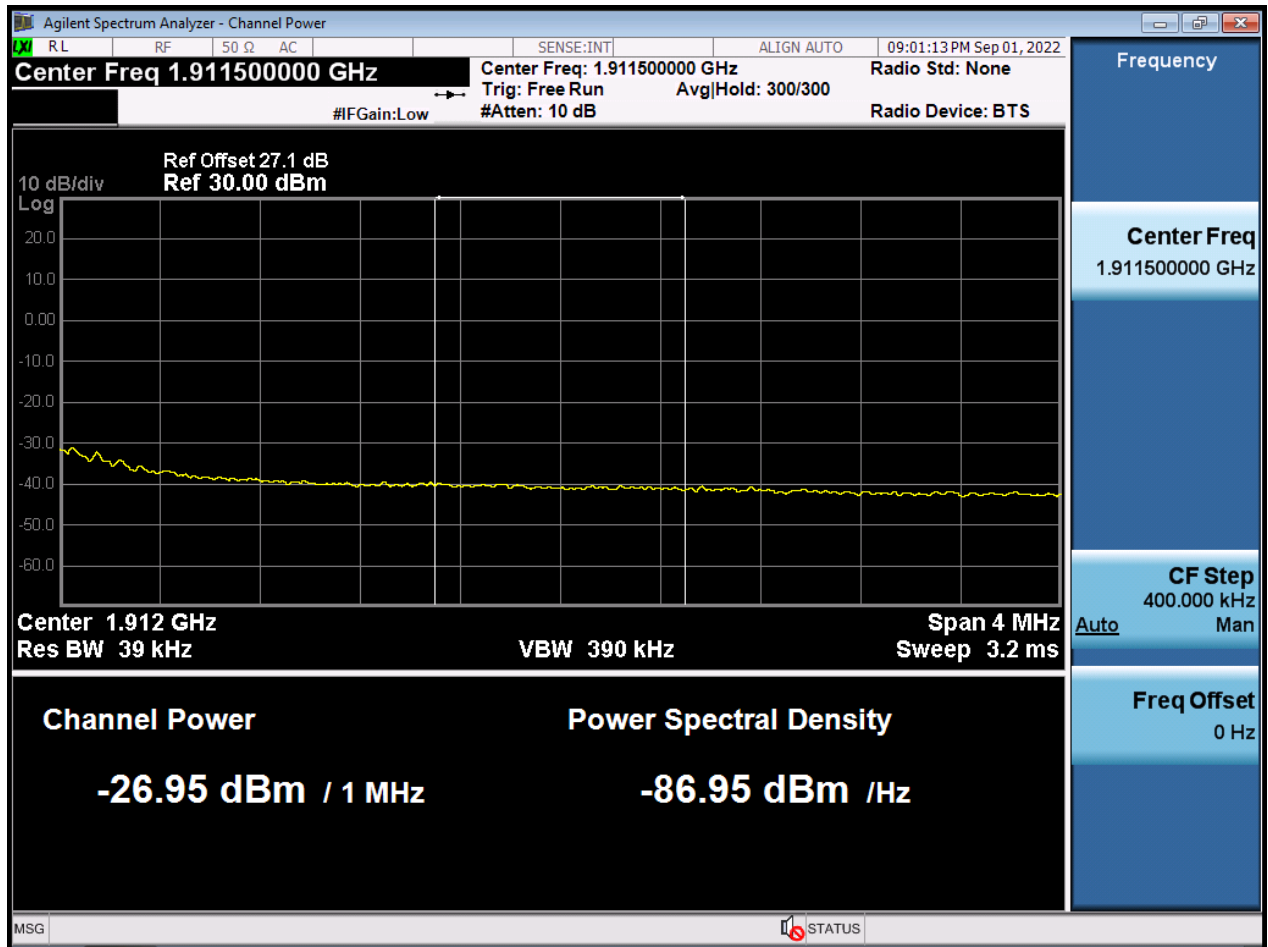

BW15 M\_BandEdge\_Lowest Channel\_QPSK\_1RB







BW15 M\_BandEdge\_Highest Channel\_QPSK\_1RB



BW20 M\_BandEdge\_Lowest Channel\_QPSK\_FullIRB(1)

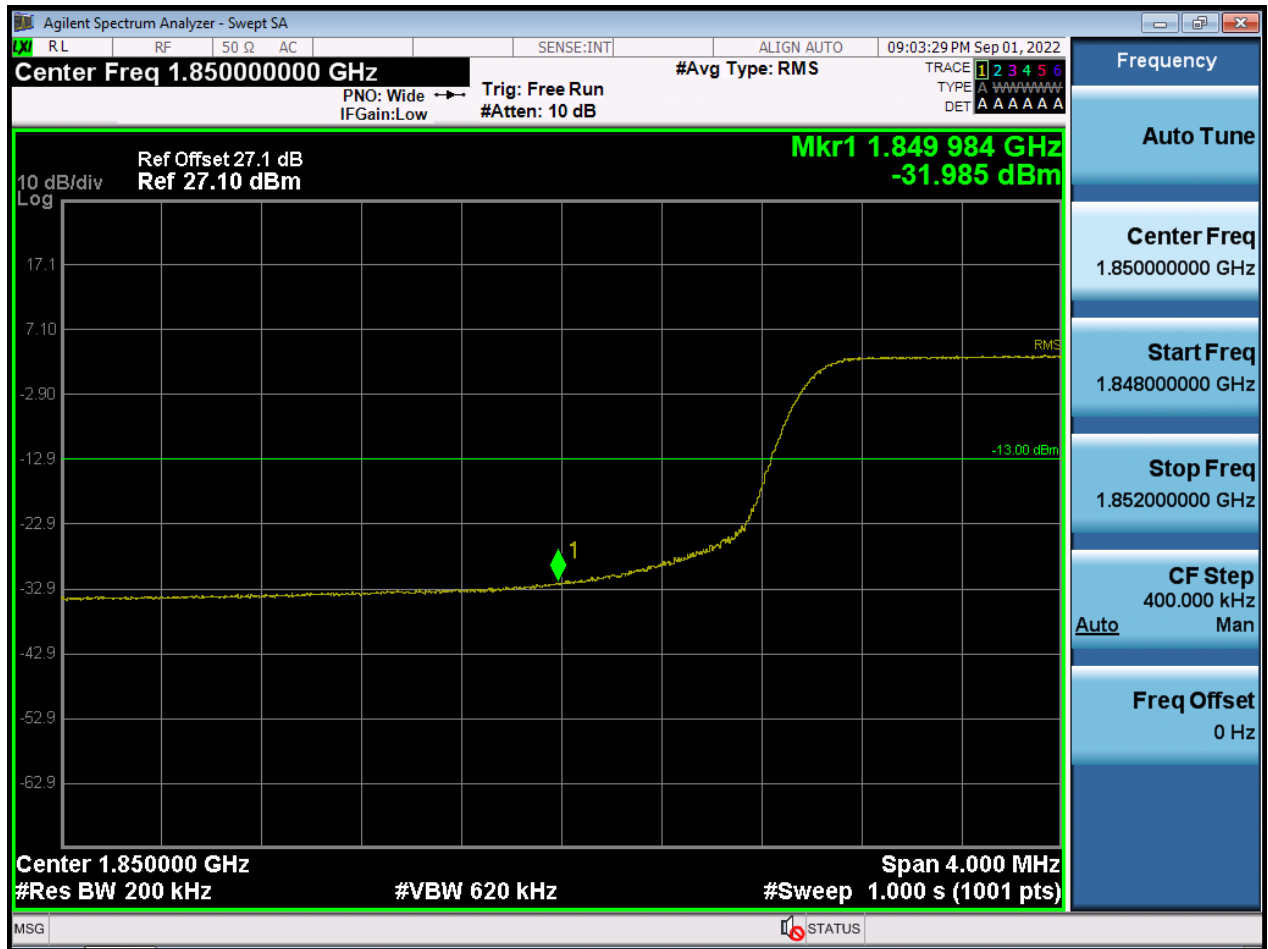


BW20 M\_BandEdge\_Lowest Channel\_QPSK\_FullIRB(2)

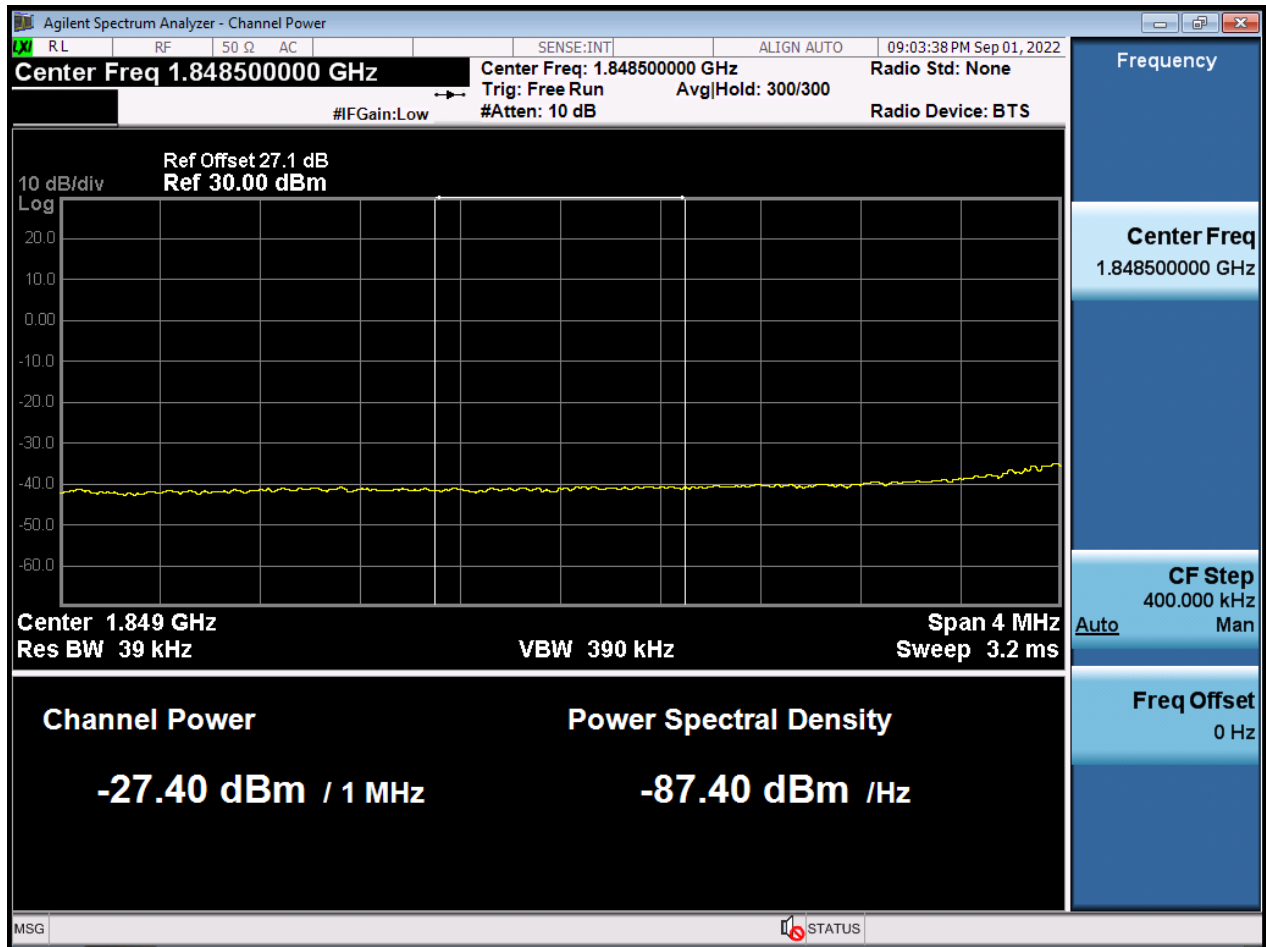

BW20 M\_BandEdge\_Highest Channel\_QPSK\_FullRB(1)



BW20 M\_BandEdge\_Highest Channel\_QPSK\_FullRB(2)

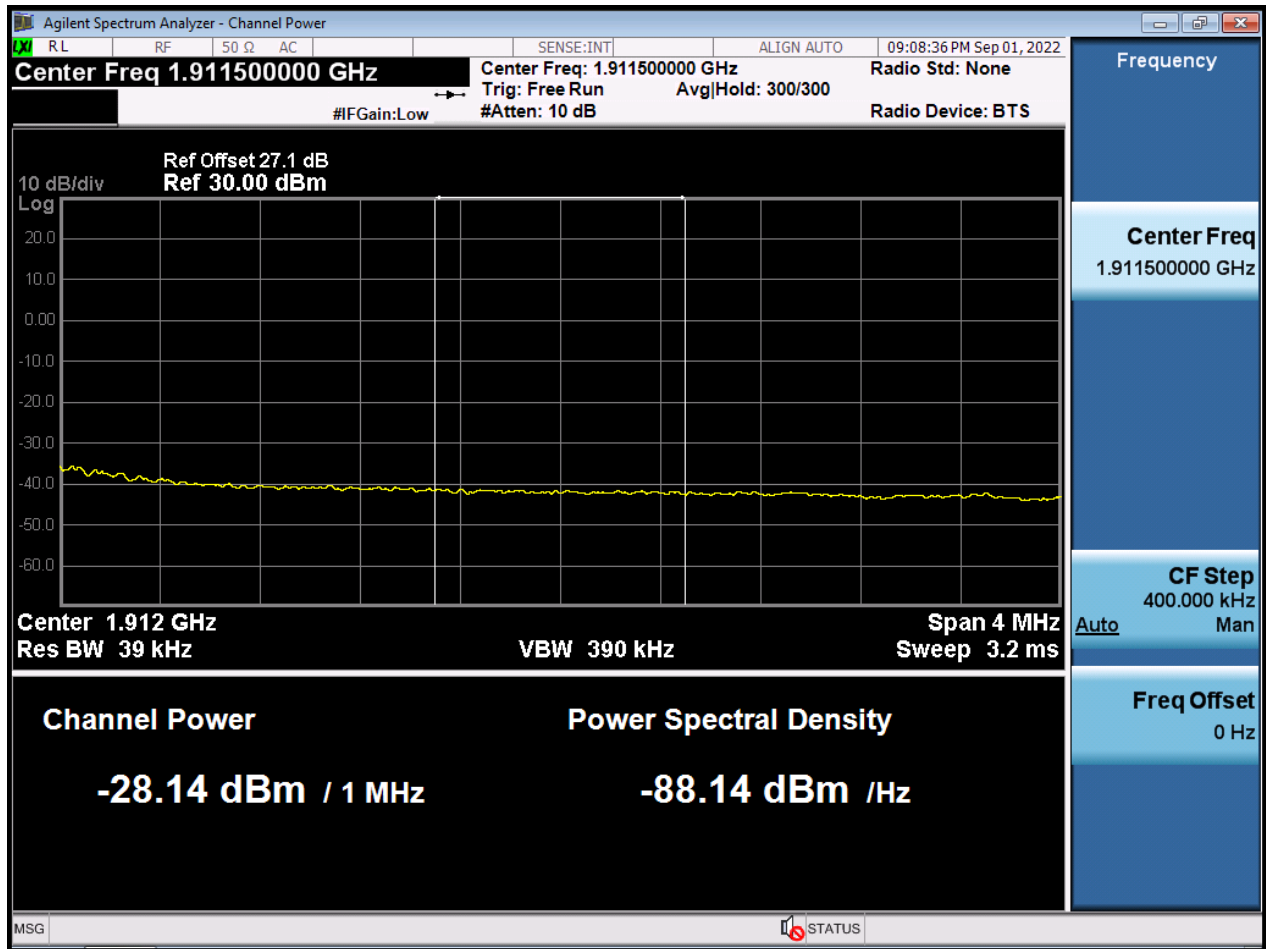


BW20 M\_BandEdge\_Lowest Channel\_QPSK\_1RB



BW20 M\_BandEdge\_Highest Channel\_QPSK\_1RB




BW1.4 M\_OBW\_Middle Channel\_QPSK\_FullRB

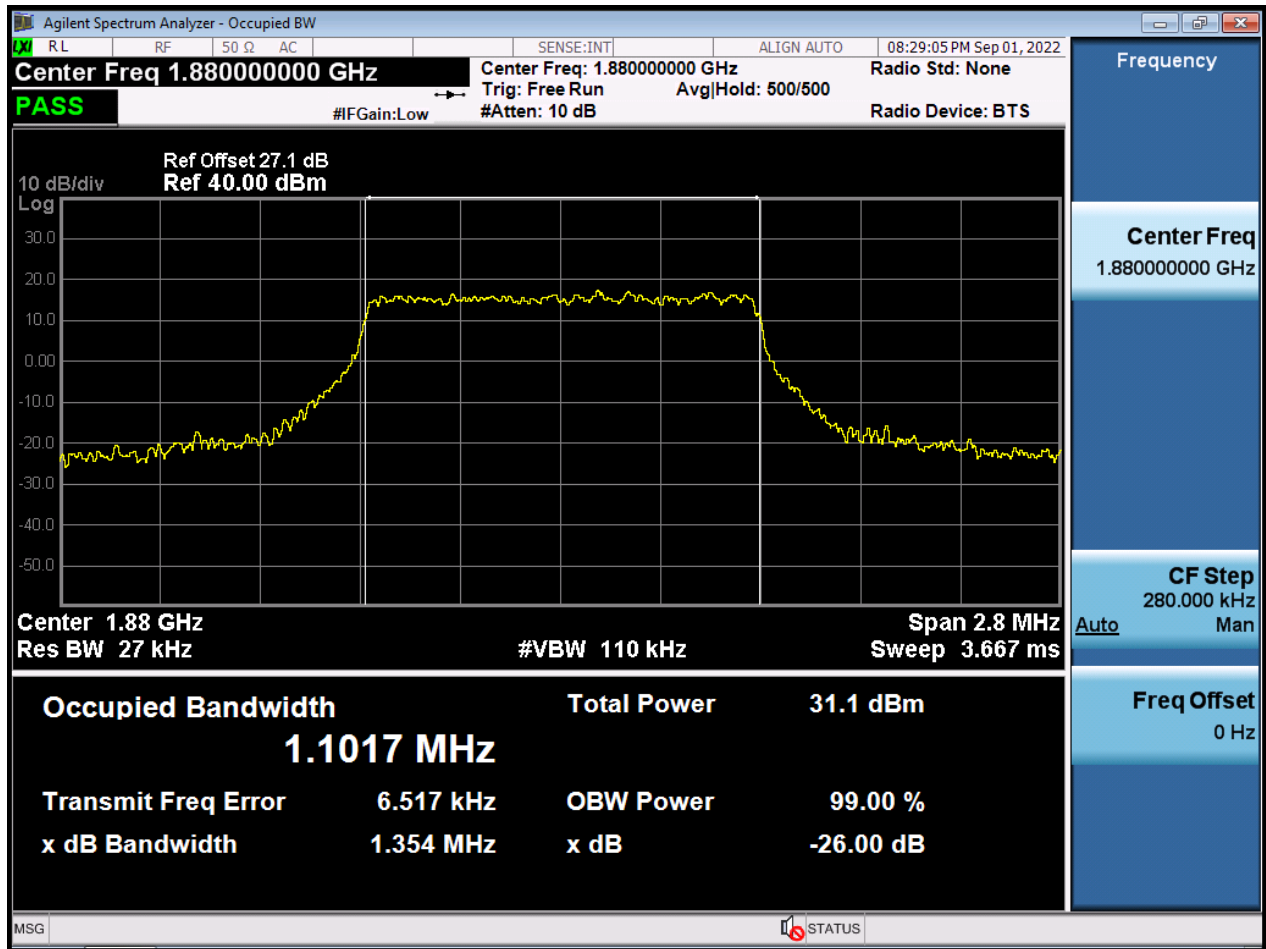





BW1.4 M\_OBW\_Middle Channel\_16QAM\_FullRB

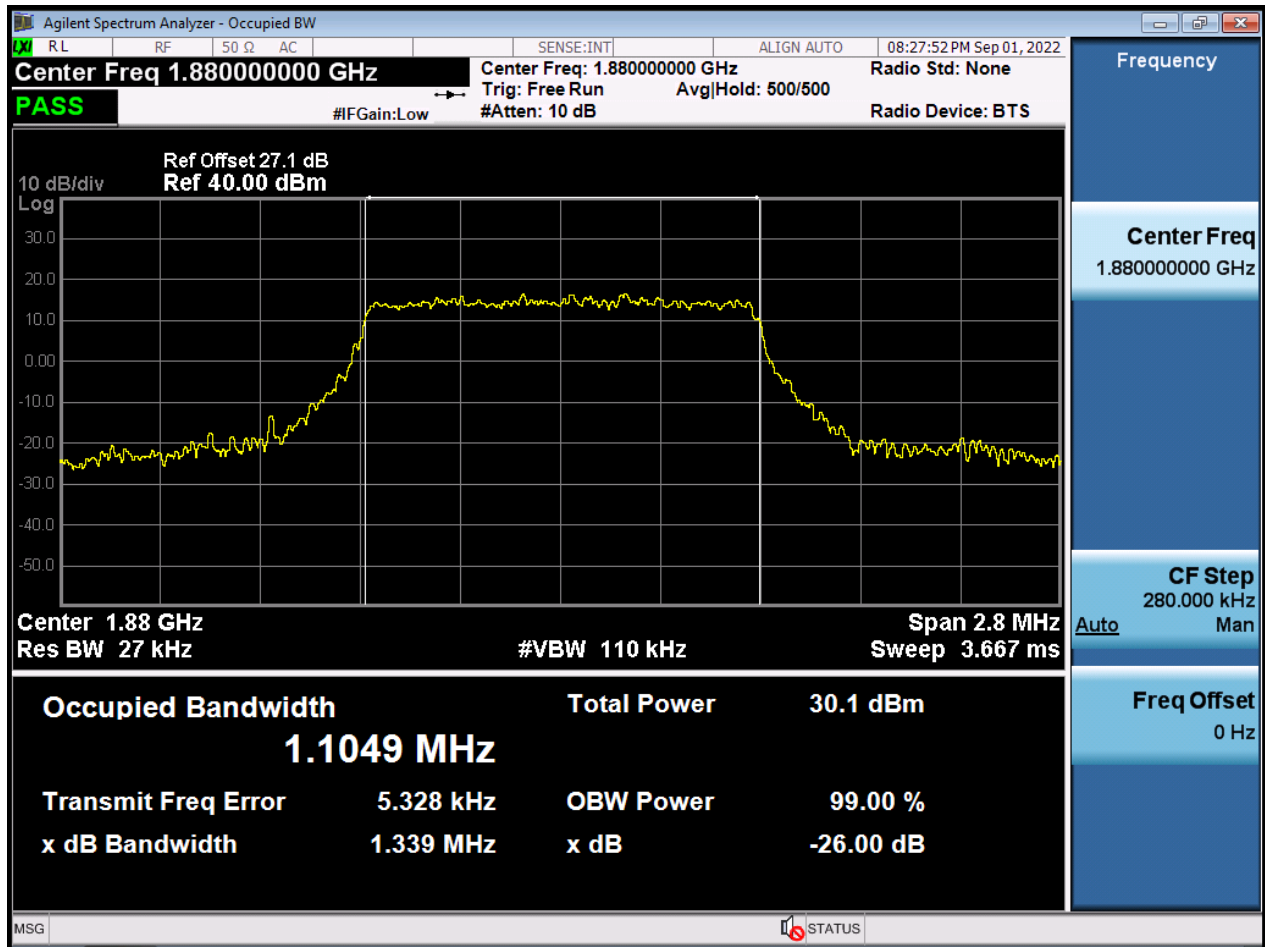


BW1.4 M\_OBW\_Middle Channel\_64QAM\_FullRB

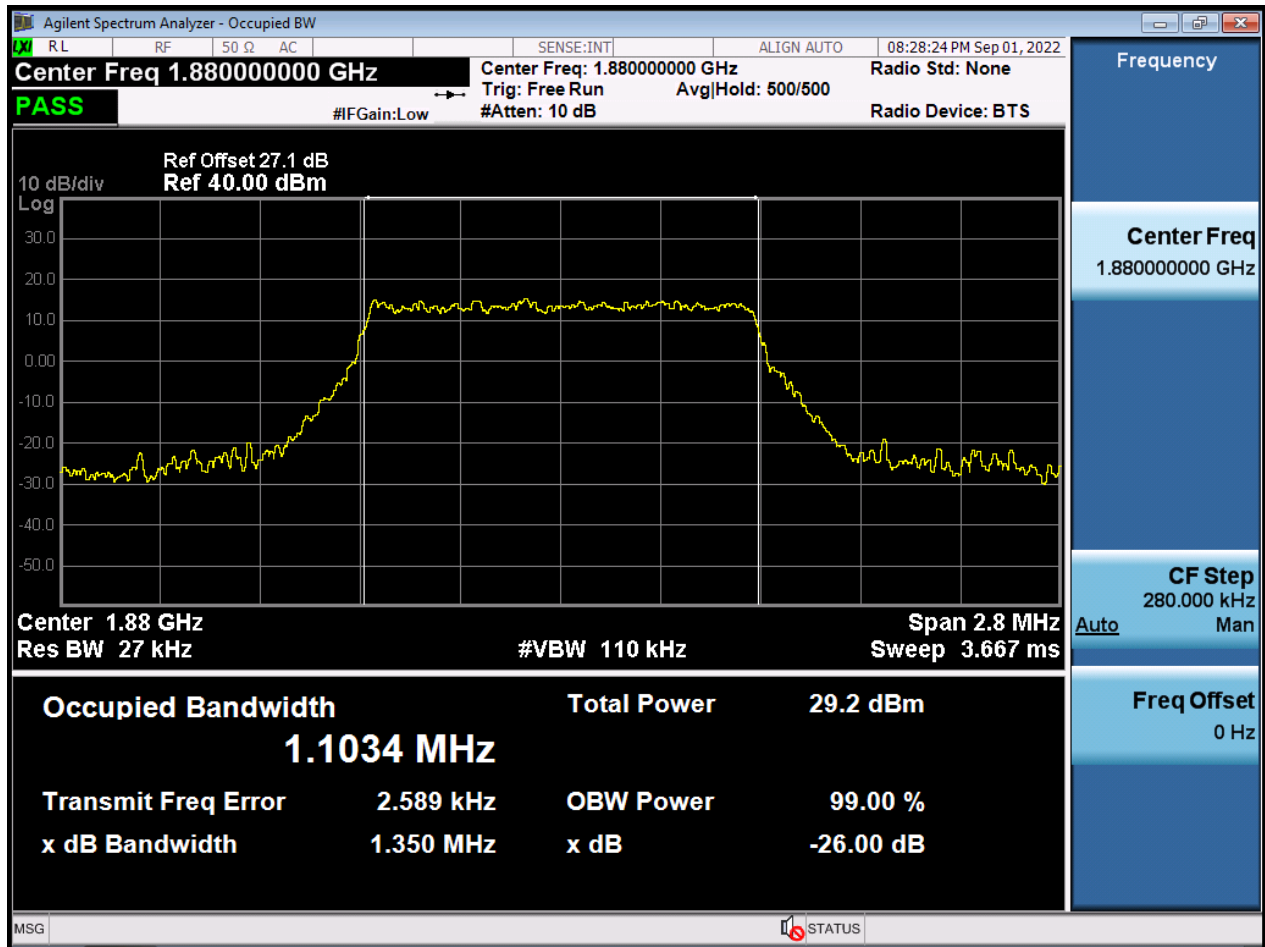


BW1.4 M\_OBW\_Middle Channel\_256QAM\_FullRB

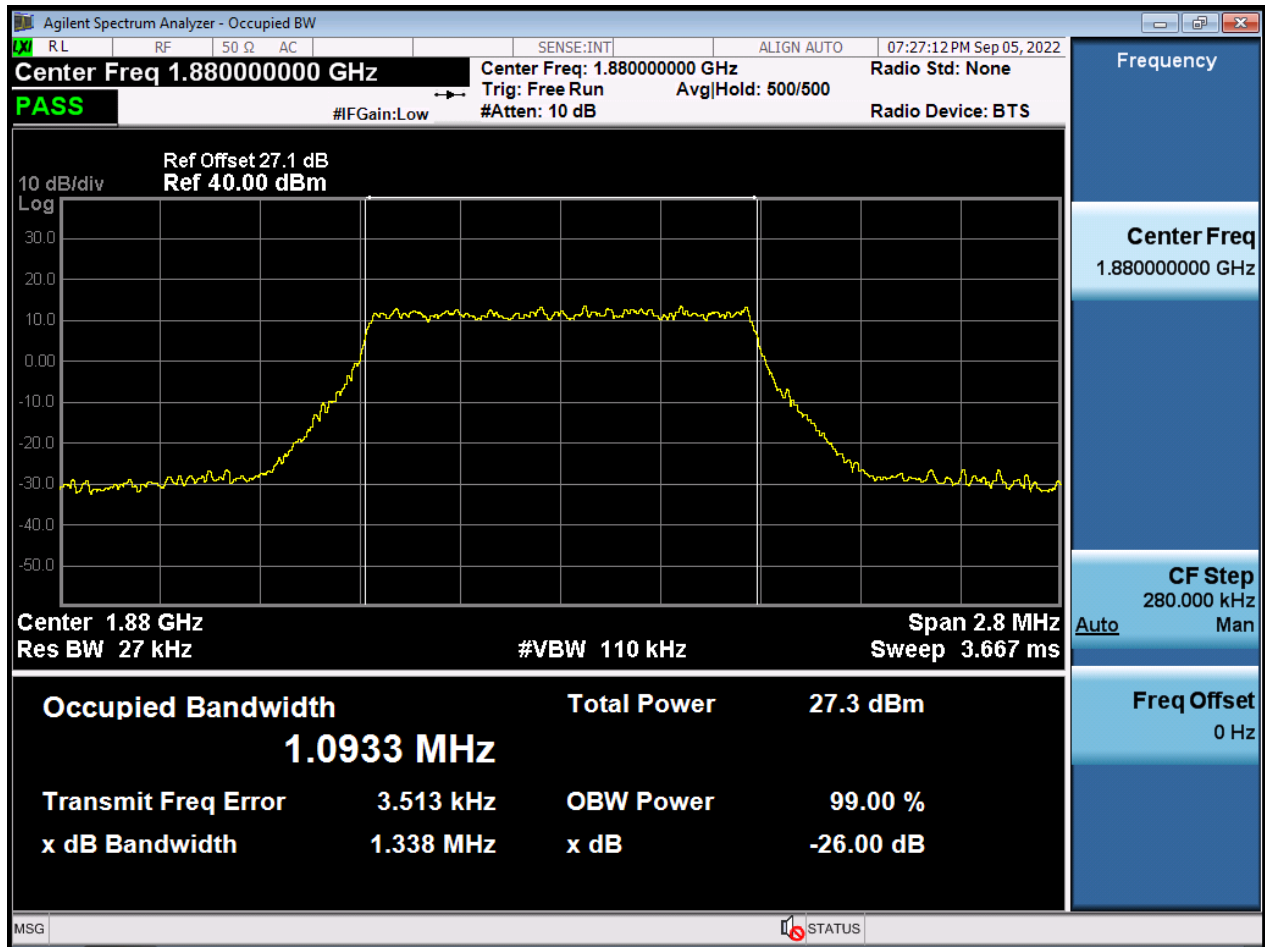


BW3 M\_OBW\_Middle Channel\_QPSK\_FullRB

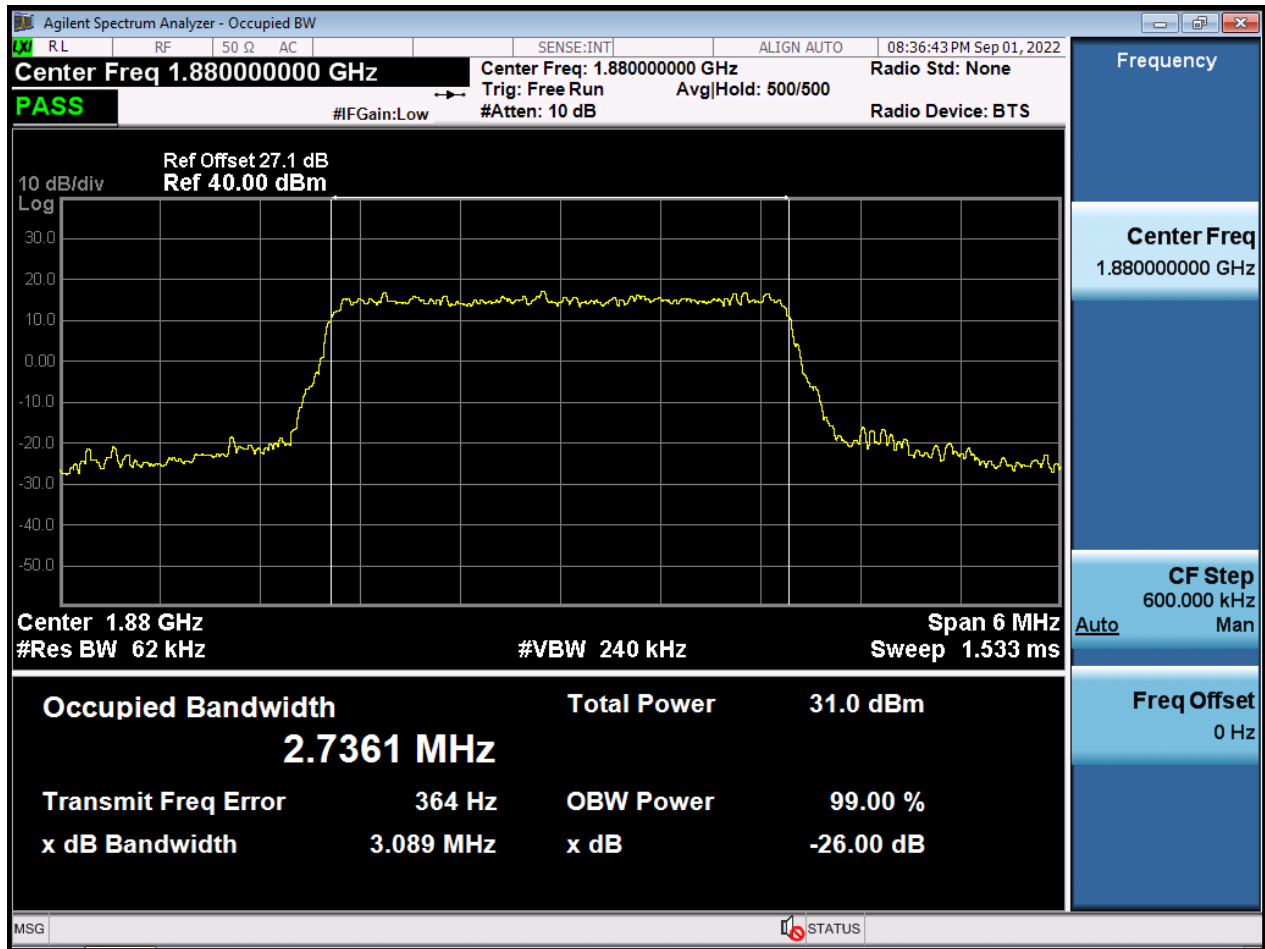


BW3 M\_OBW\_Middle Channel\_16QAM\_FullIRB

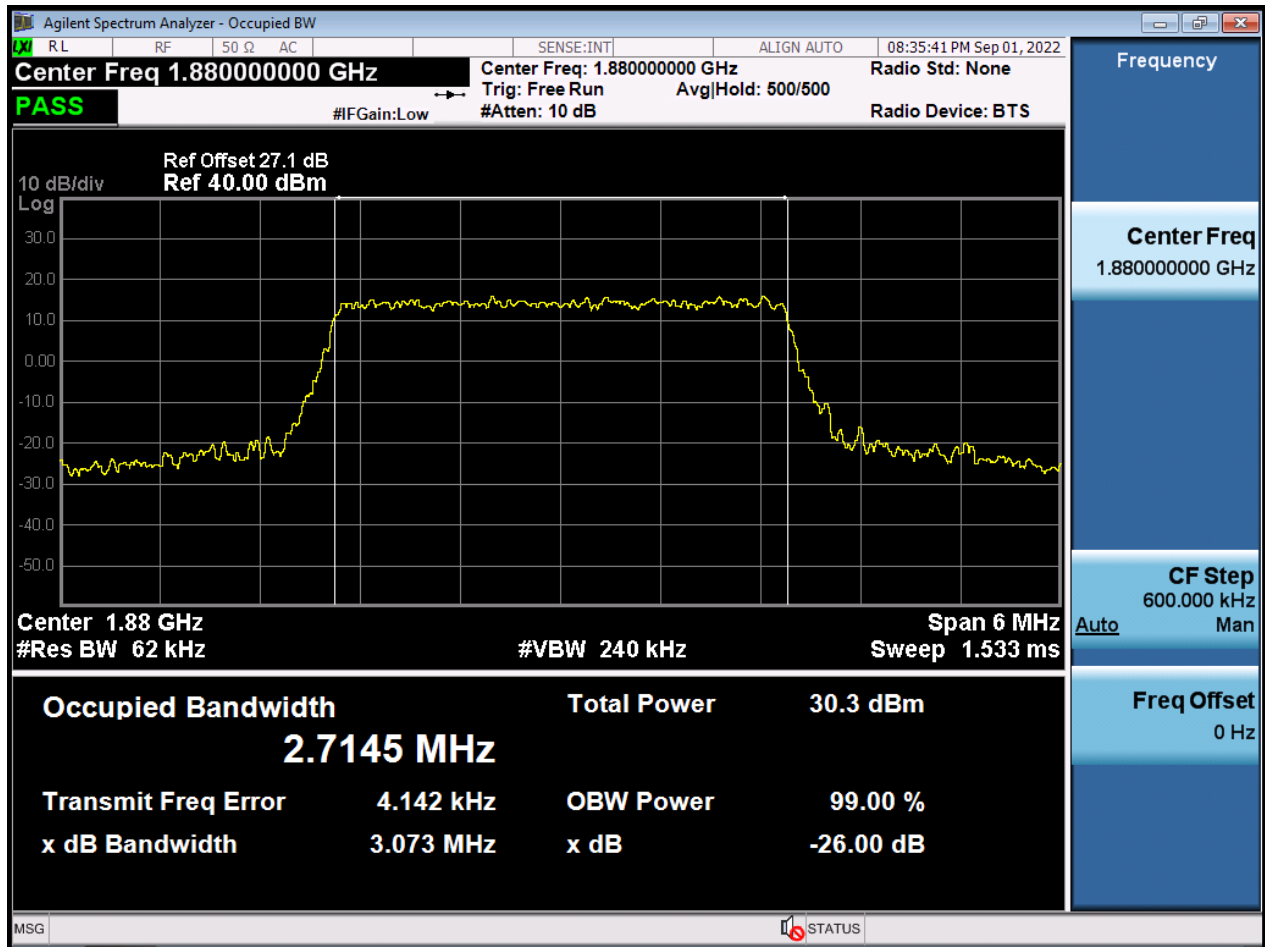


BW3 M\_OBW\_Middle Channel\_64QAM\_FullIRB

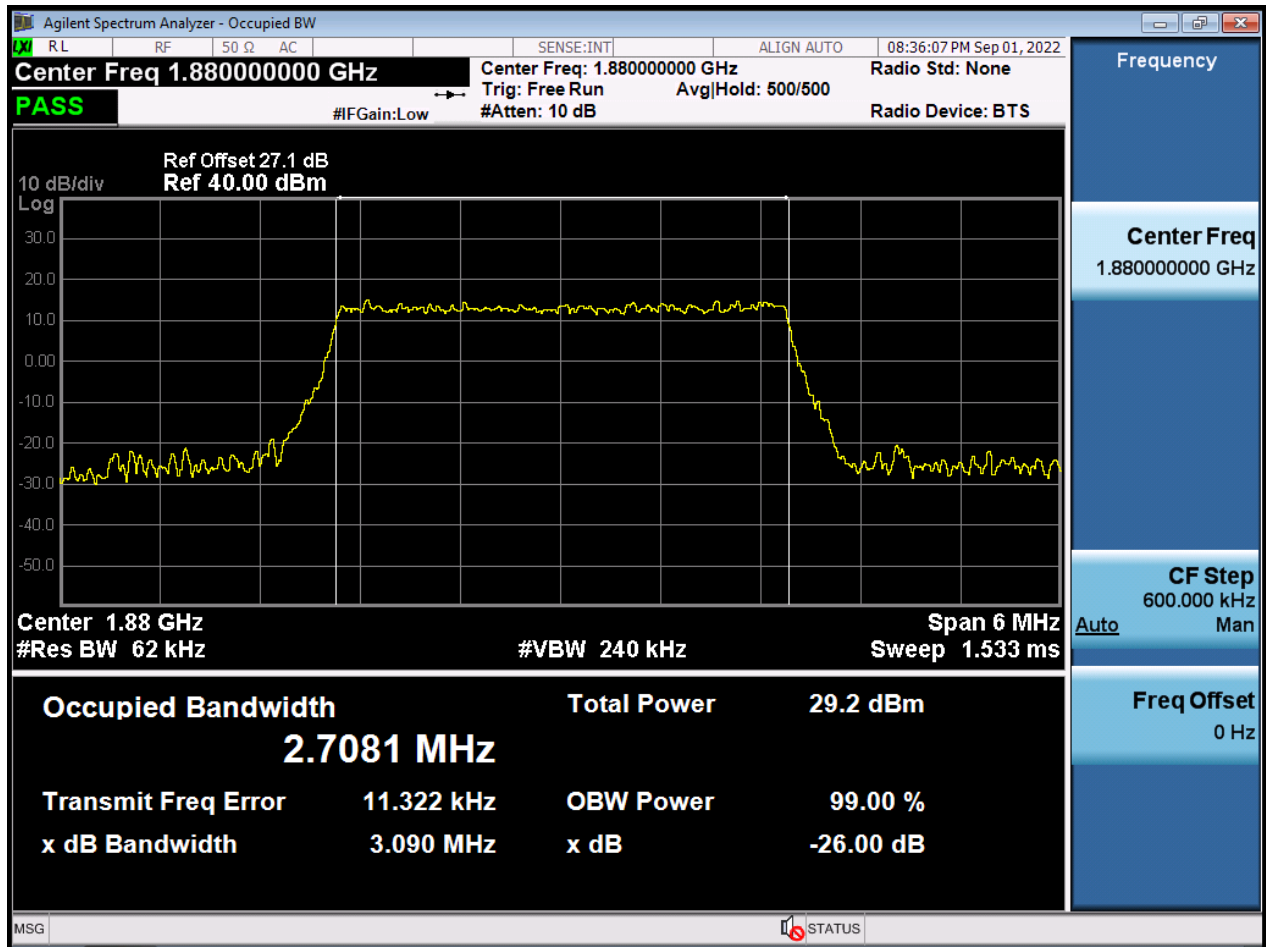

BW3 M\_OBW\_Middle Channel\_256QAM\_FullIRB

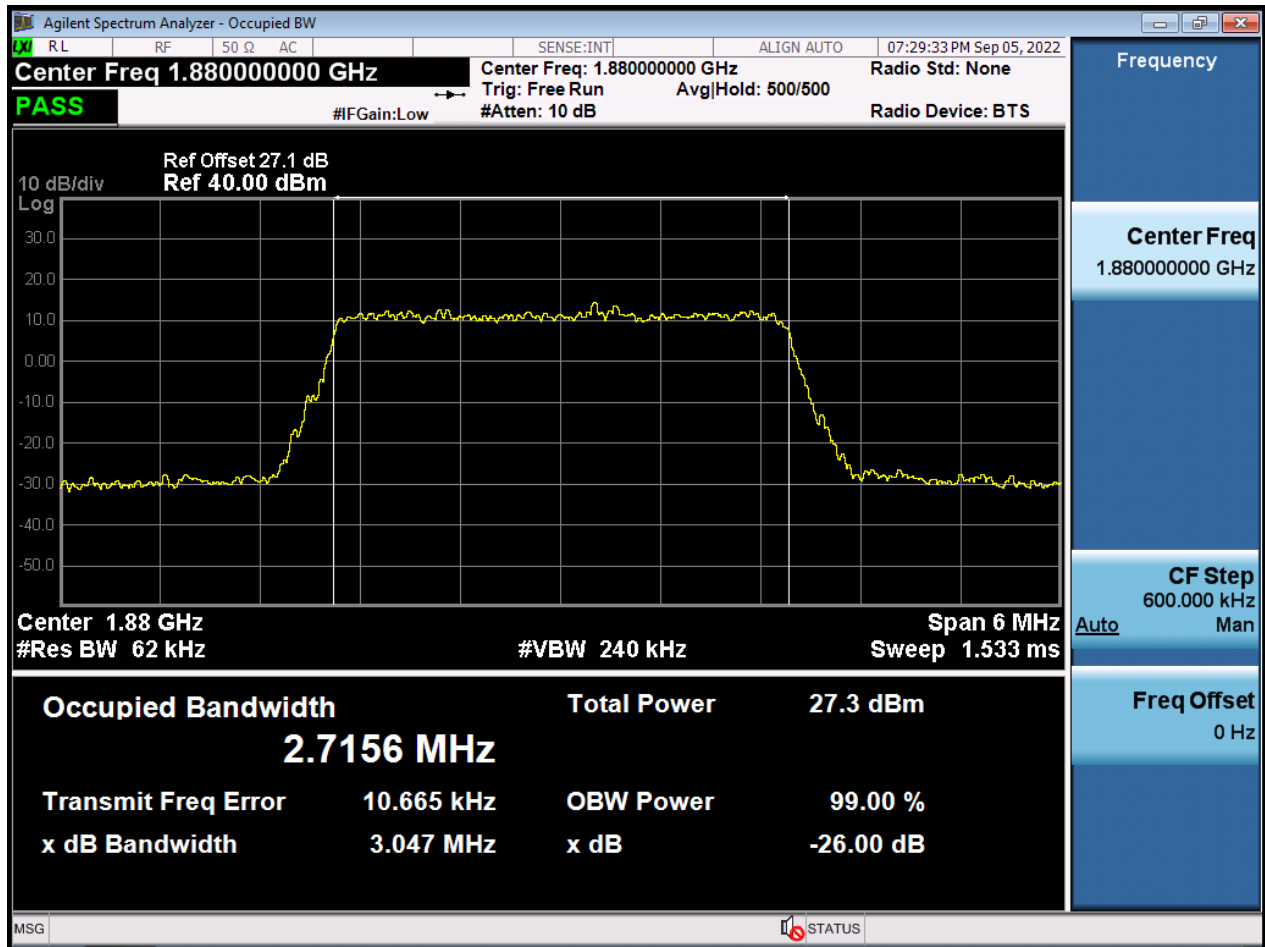


BW5 M\_OBW\_Middle Channel\_QPSK\_FullIRB

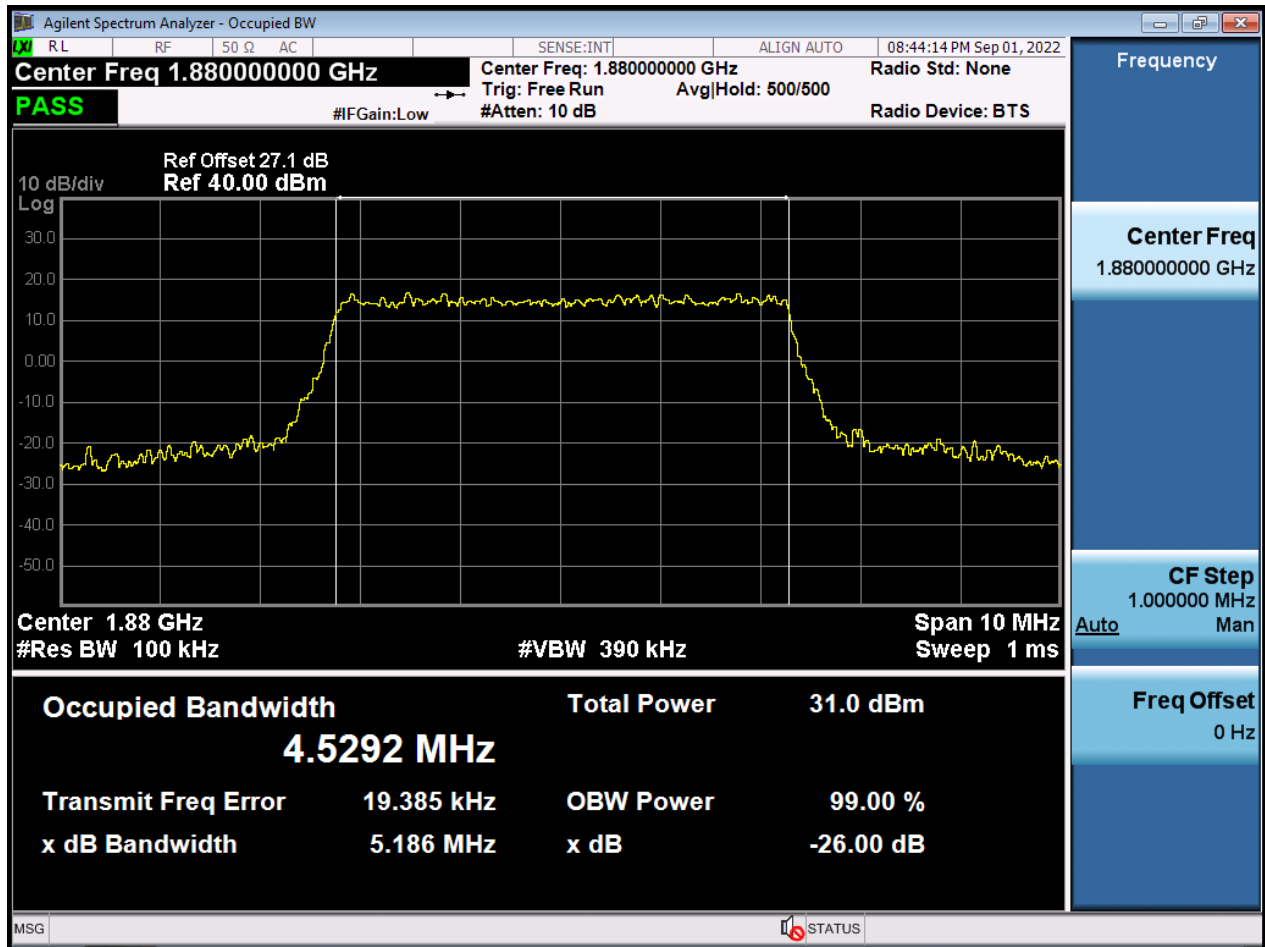





BW5 M\_OBW\_Middle Channel\_16QAM\_FullIRB

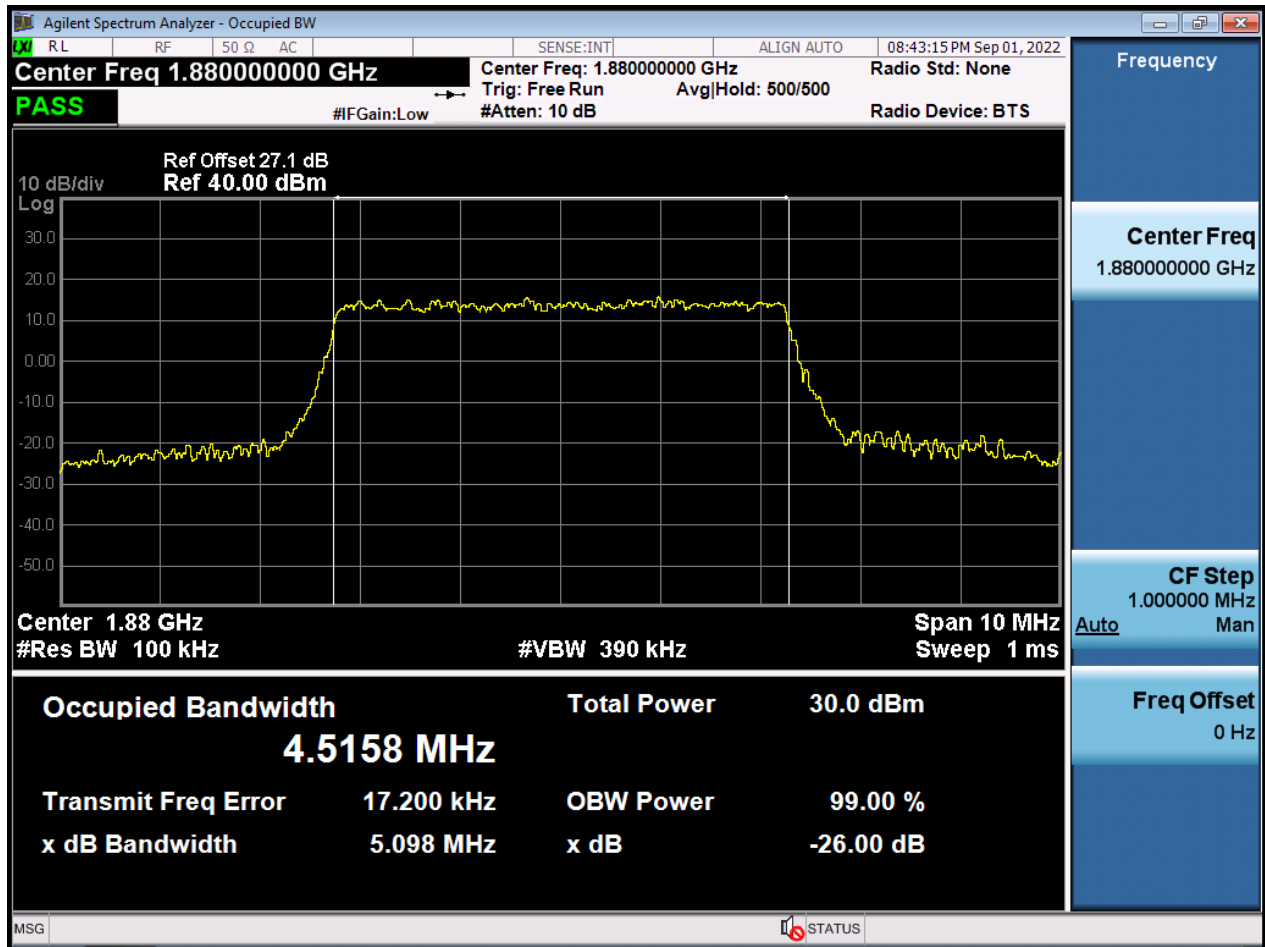


BW5 M\_OBW\_Middle Channel\_64QAM\_FullIRB

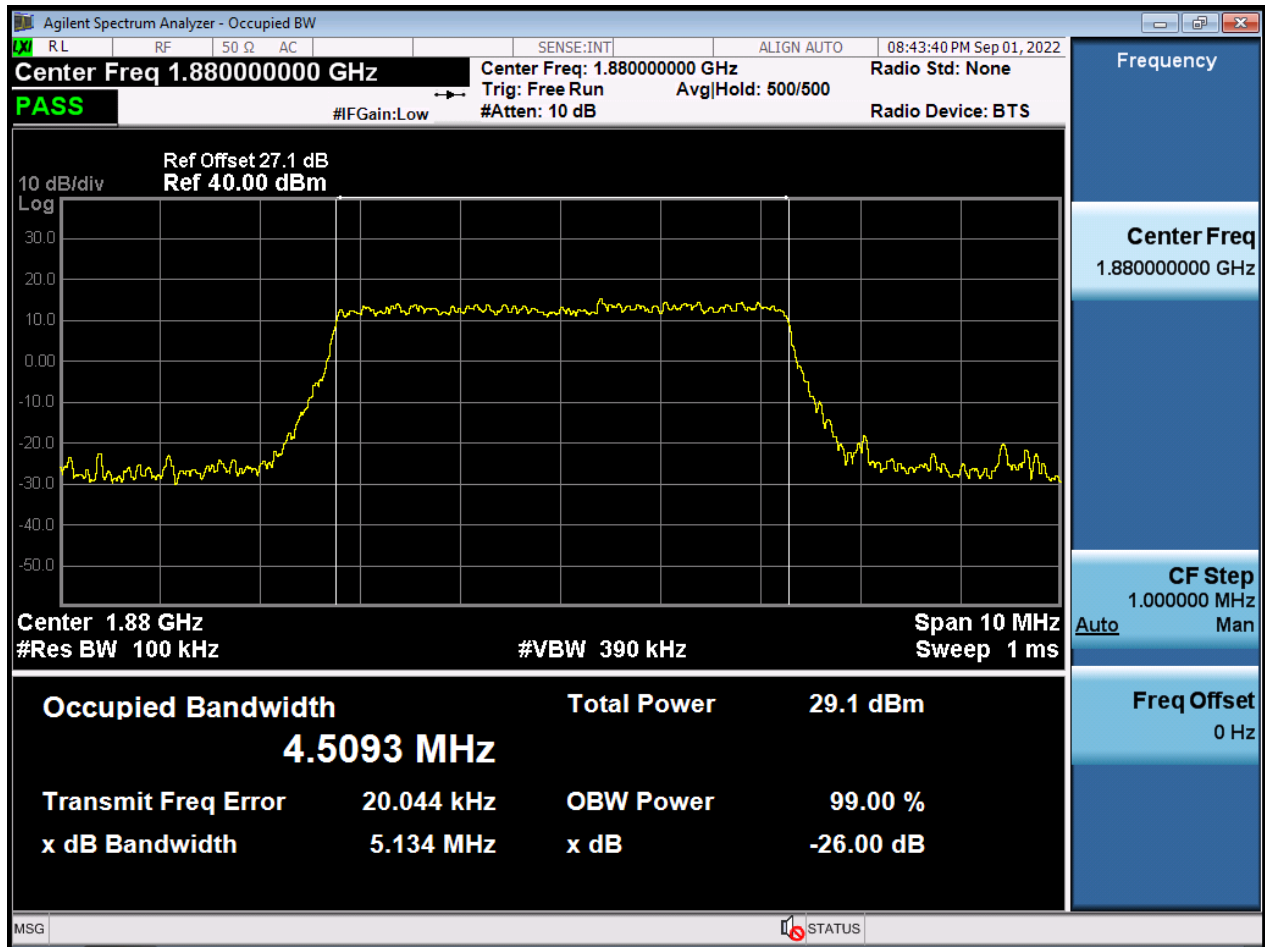


BW5 M\_OBW\_Middle Channel\_256QAM\_FullIRB

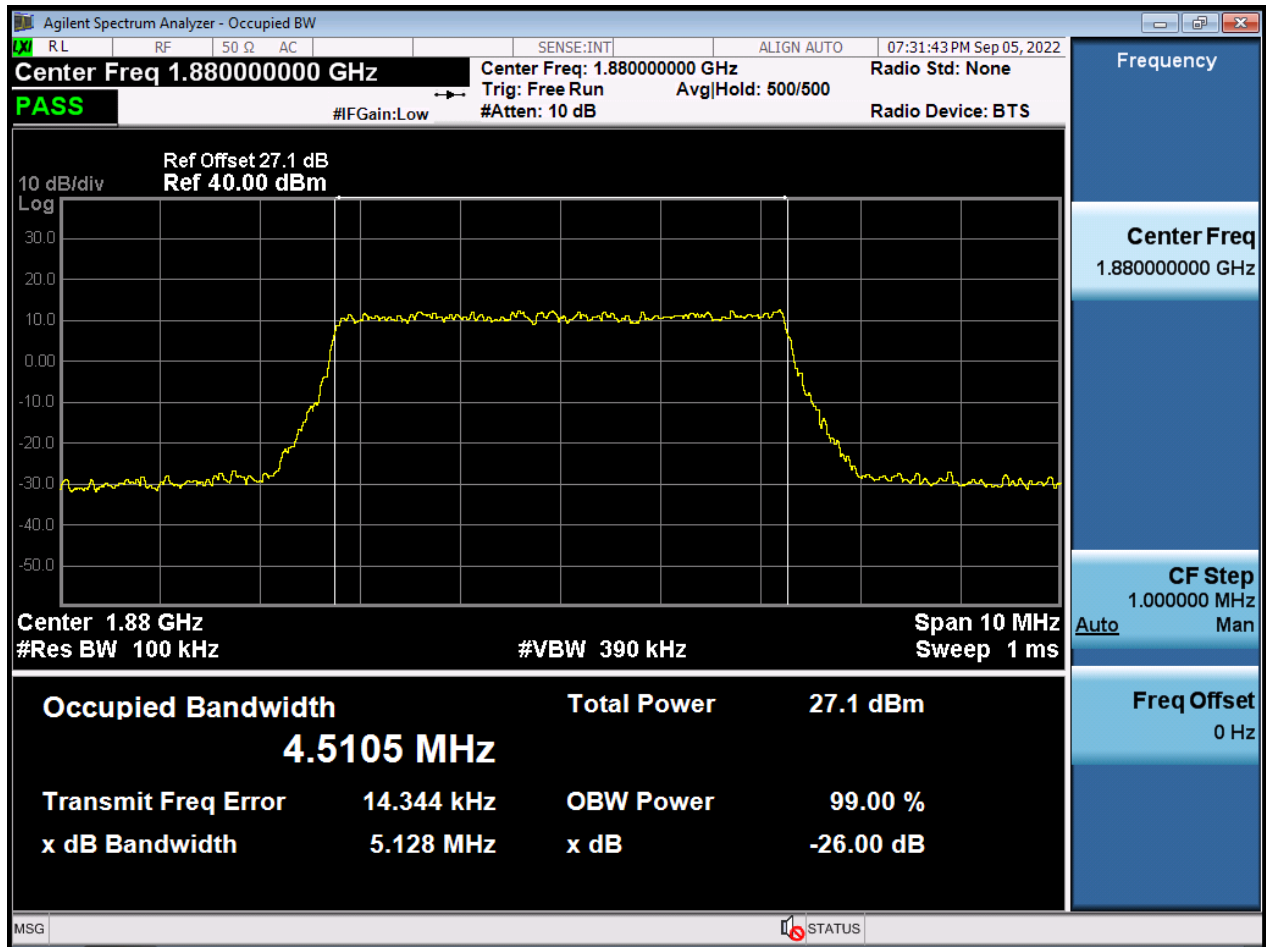


BW10 M\_OBW\_Middle Channel\_QPSK\_FullIRB

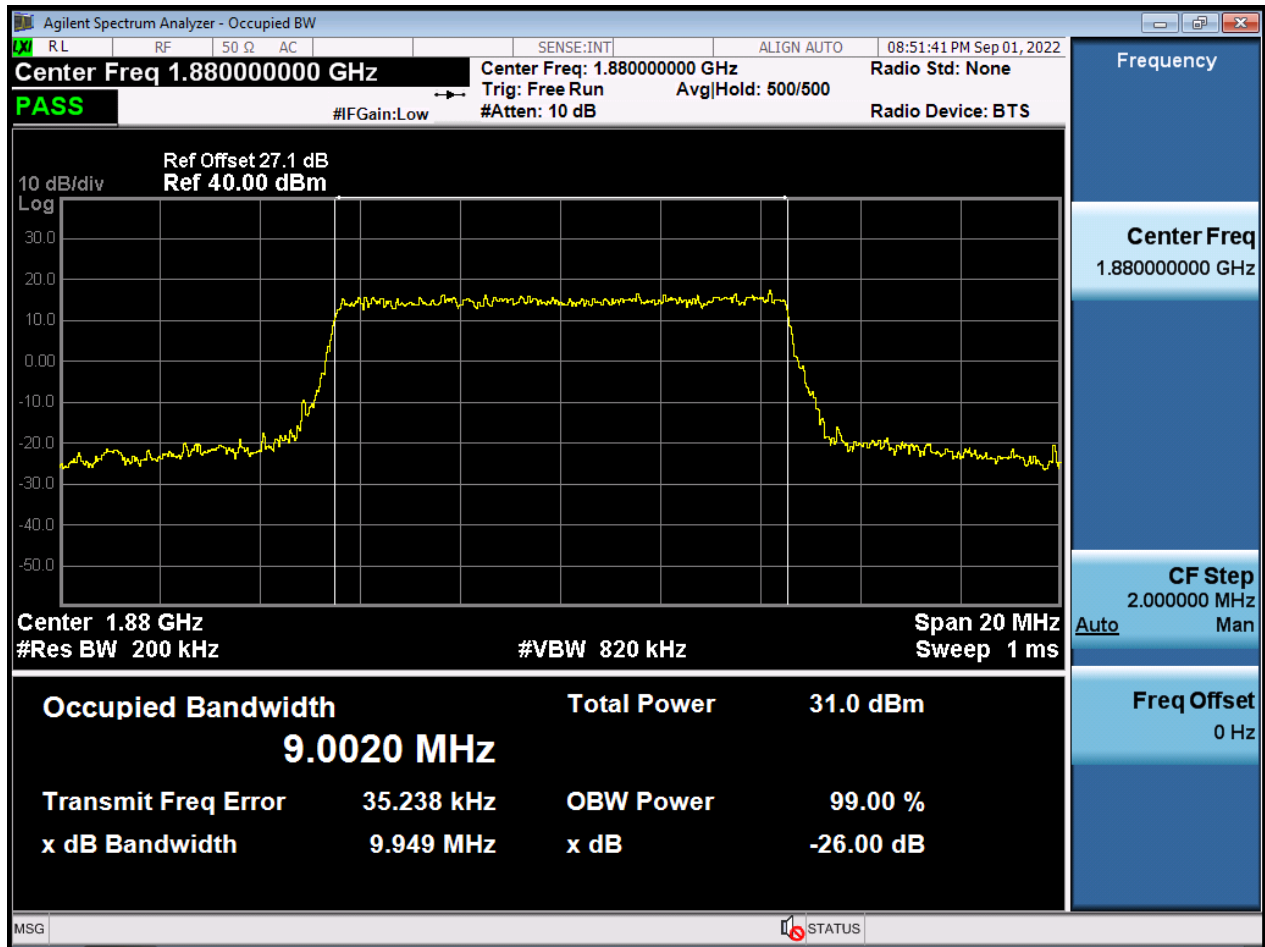


BW10 M\_OBW\_Middle Channel\_16QAM\_FullIRB

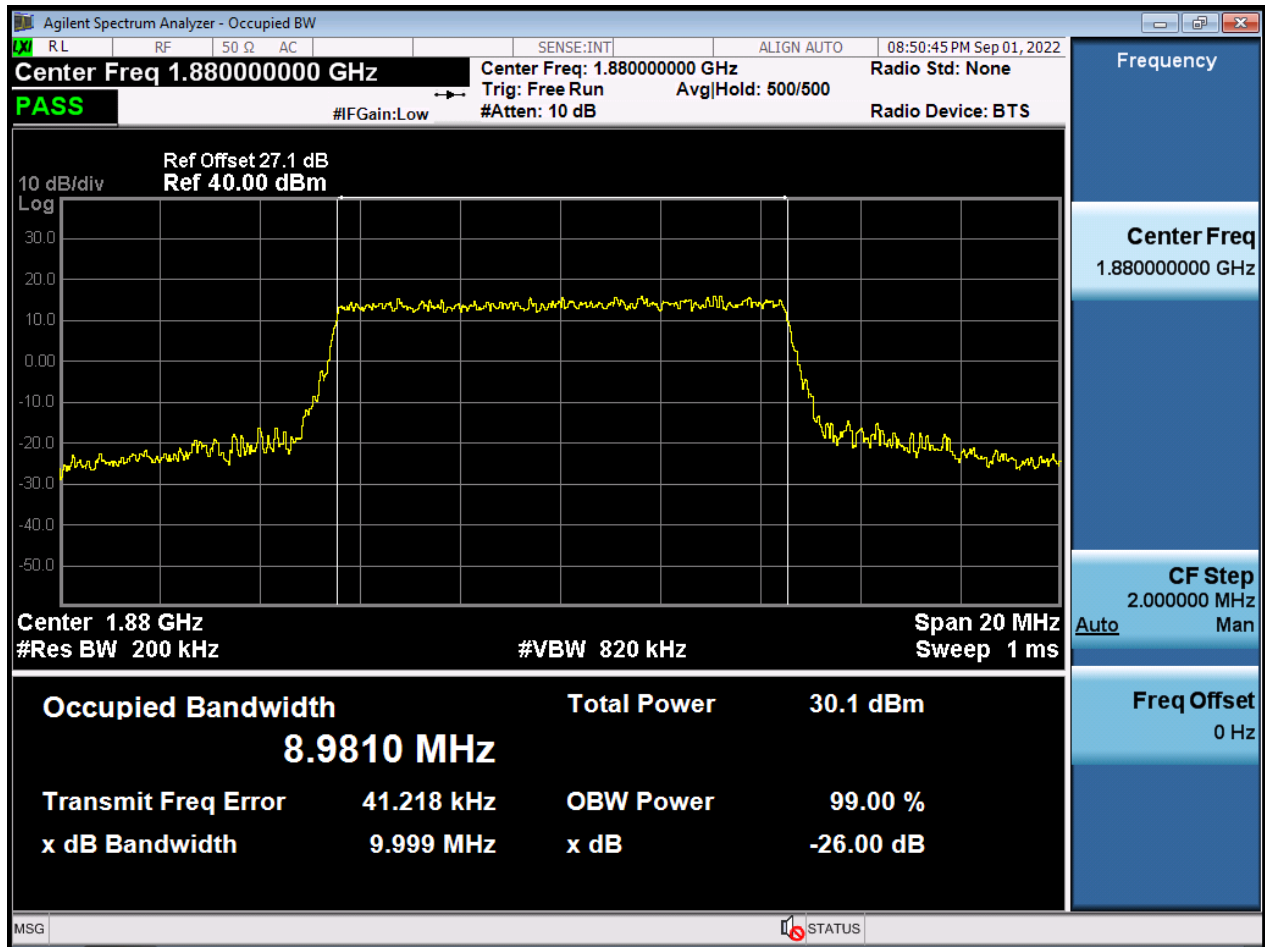


BW10 M\_OBW\_Middle Channel\_64QAM\_FullIRB

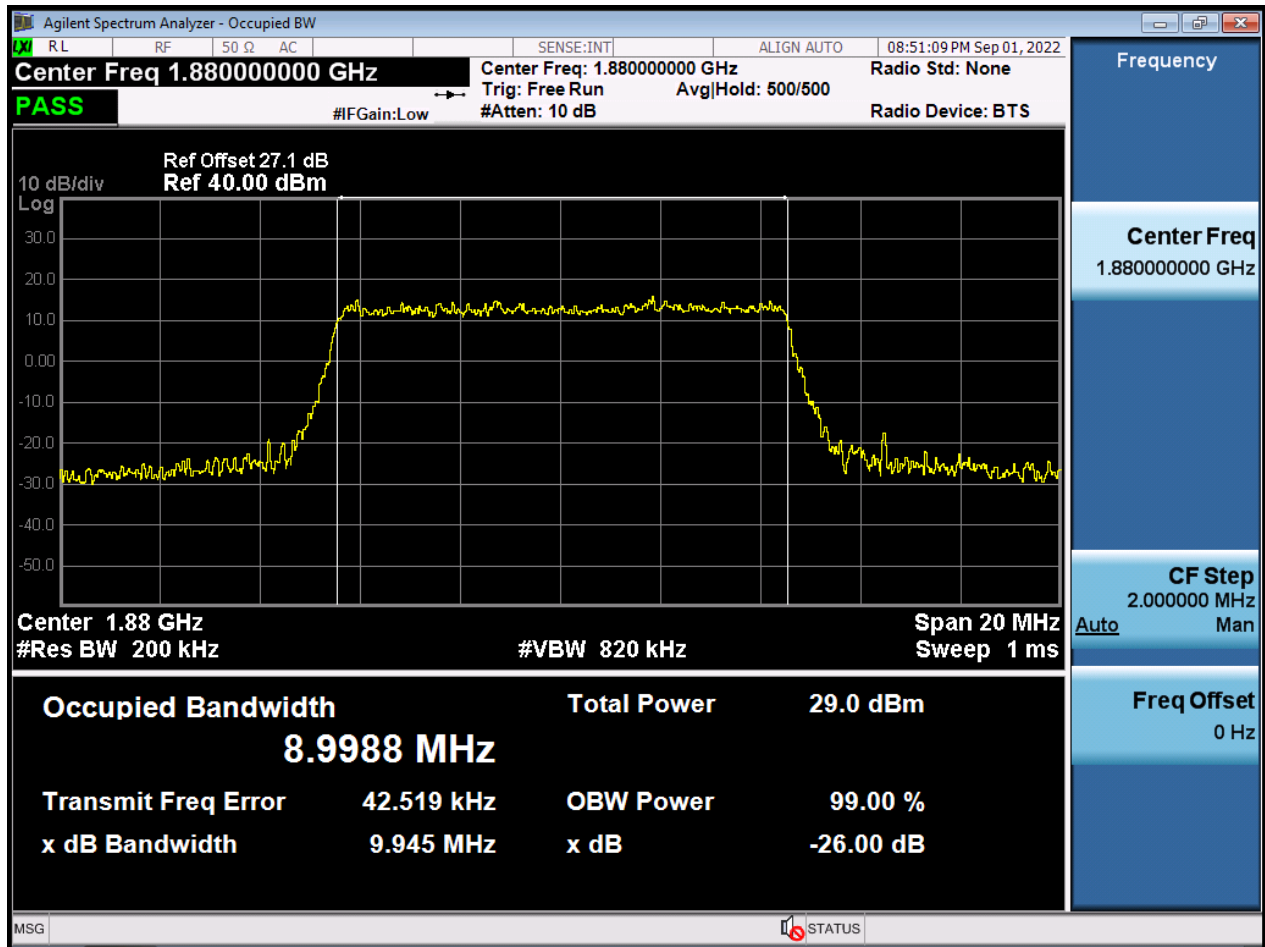

BW10 M\_OBW\_Middle Channel\_256QAM\_FullRB

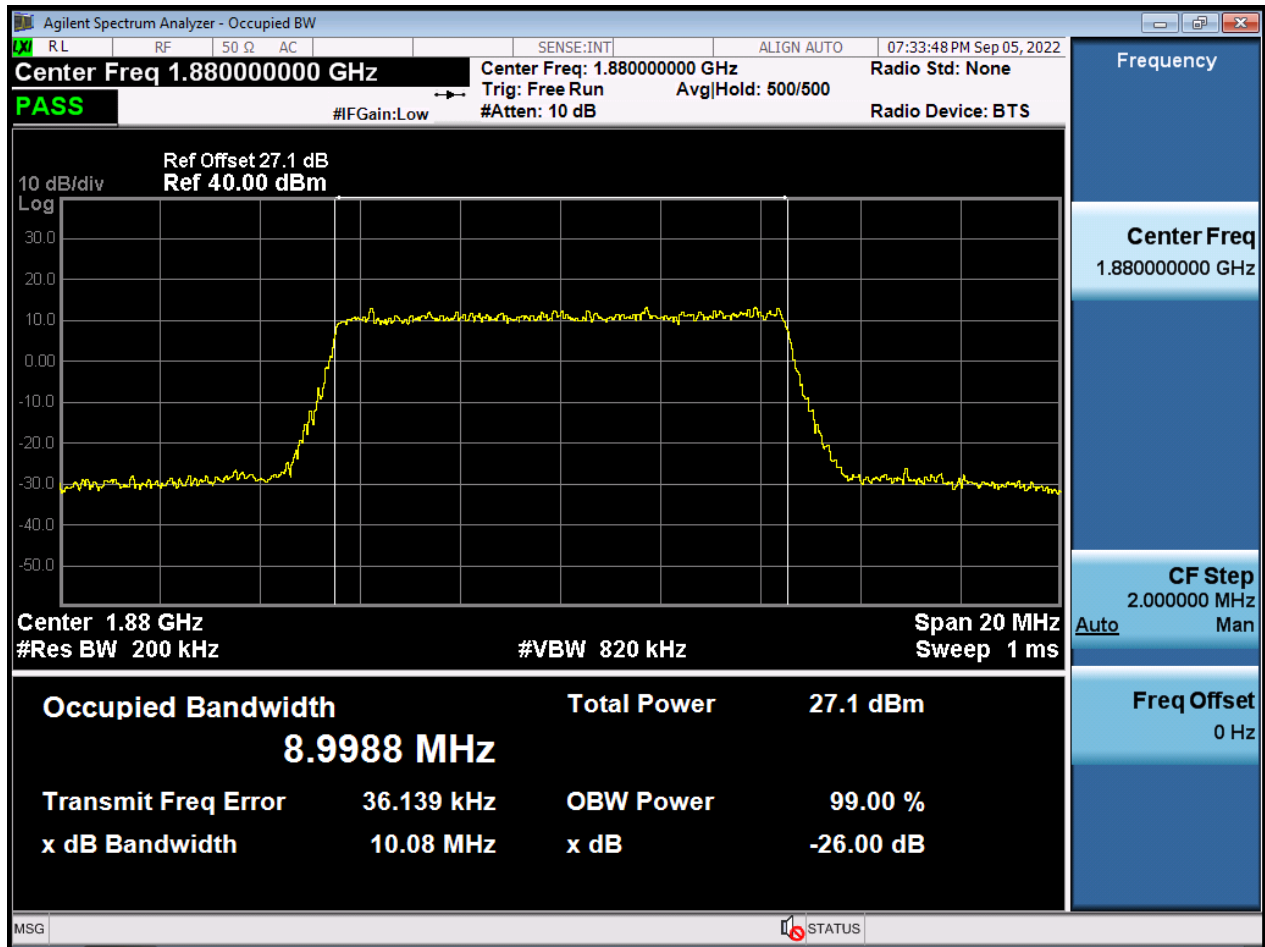


BW15 M\_OBW\_Middle Channel\_QPSK\_FullIRB

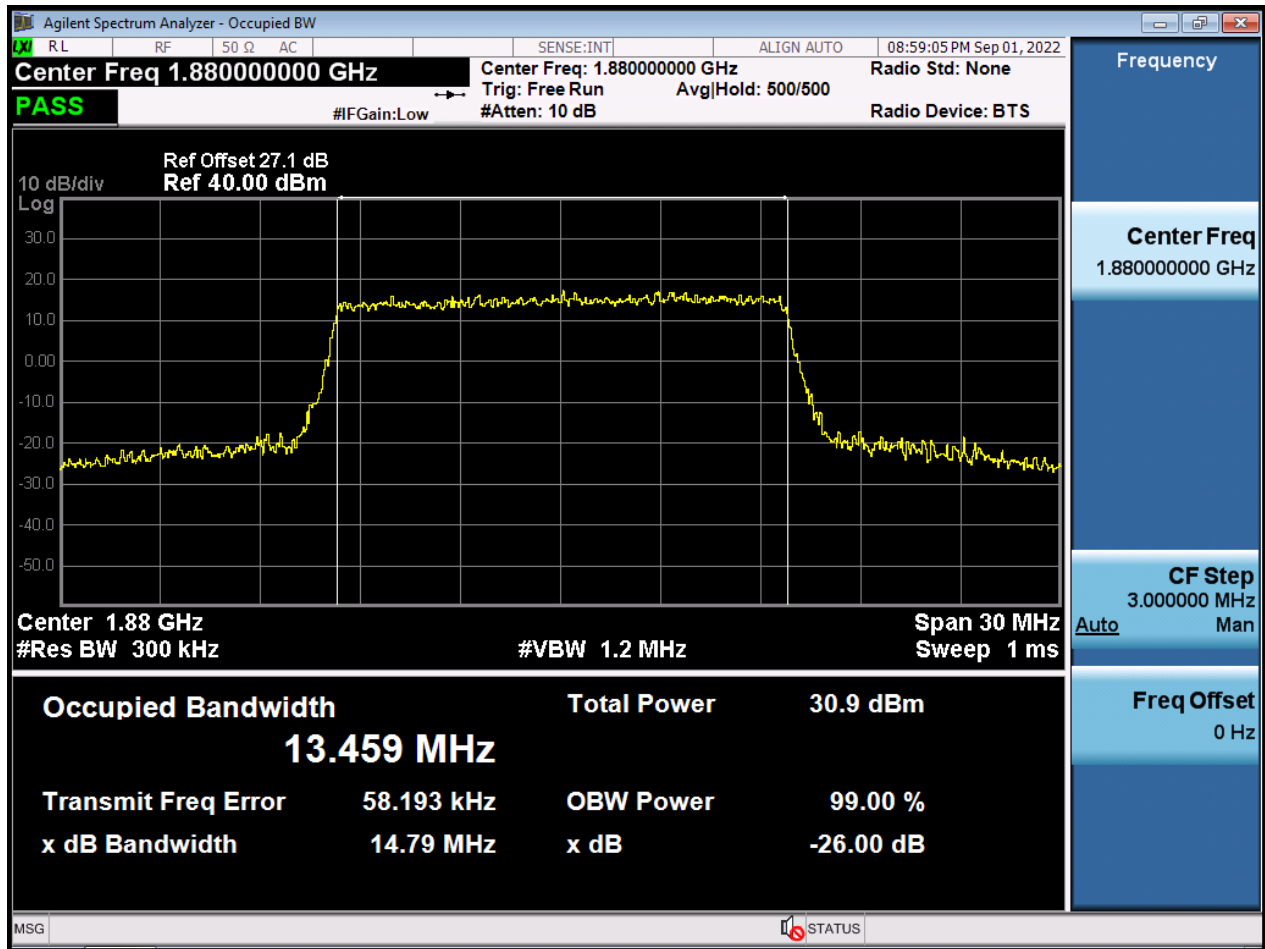





BW15 M\_OBW\_Middle Channel\_16QAM\_FullIRB

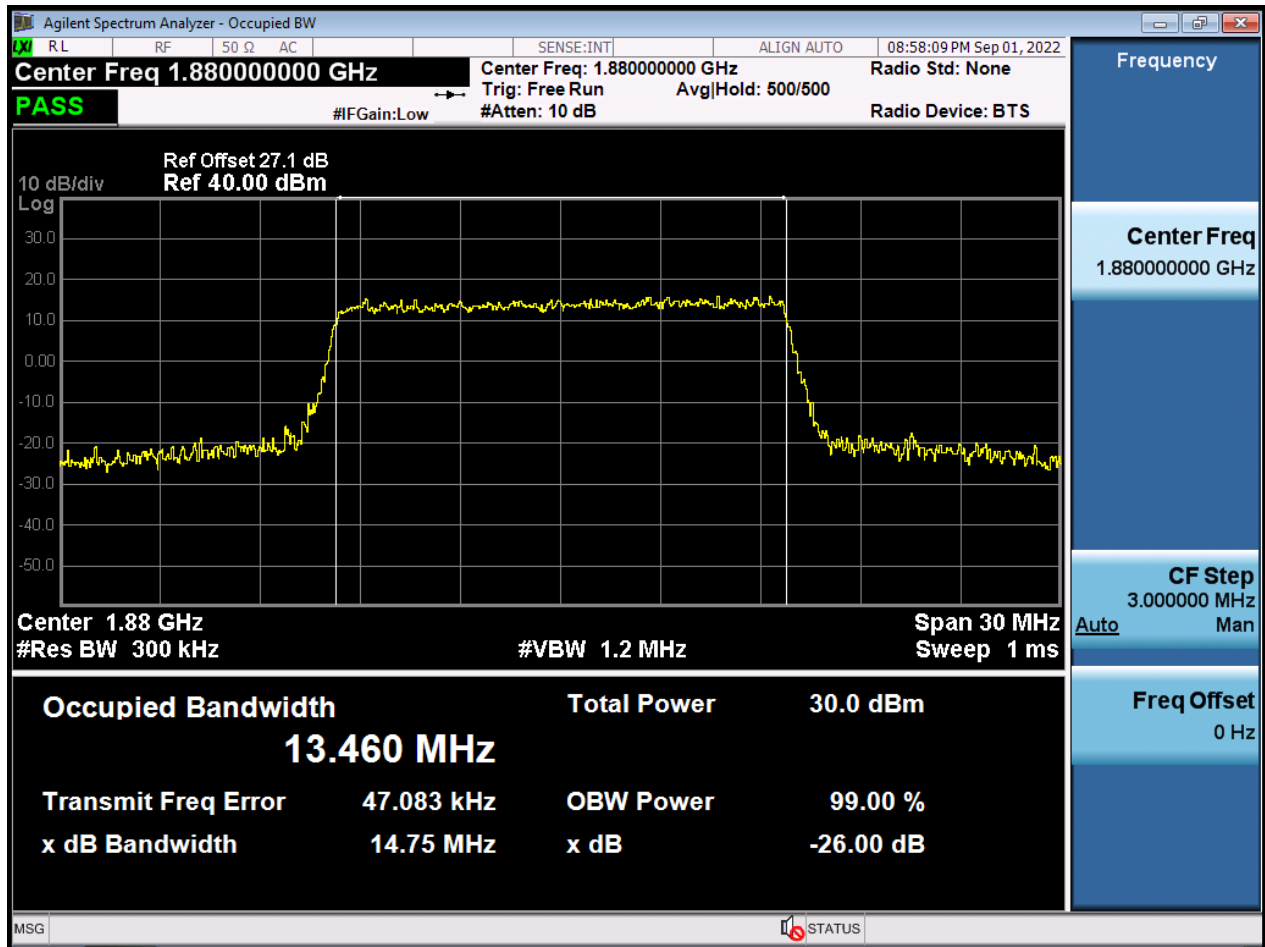


BW15 M\_OBW\_Middle Channel\_64QAM\_FullIRB

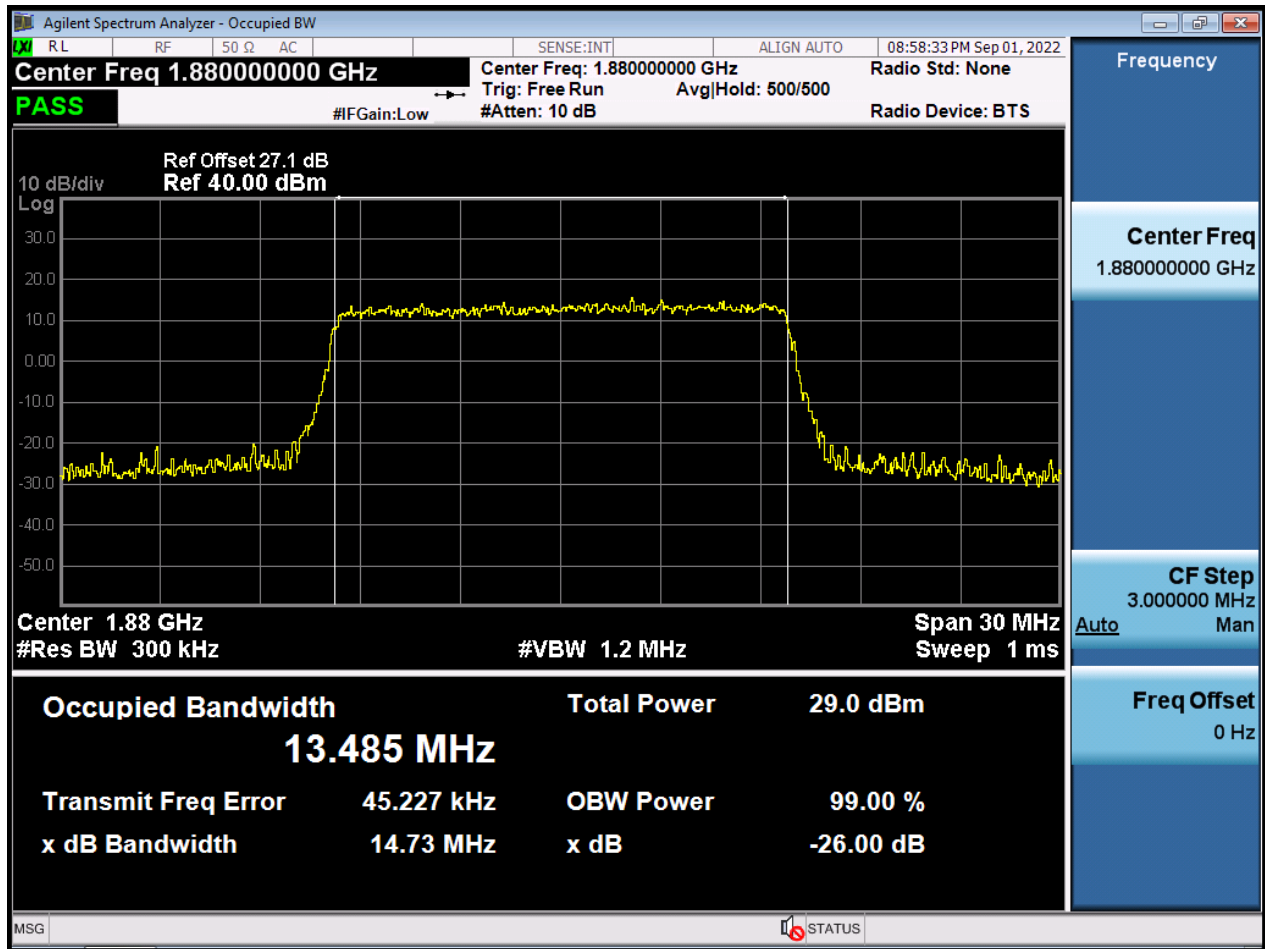


BW15 M\_OBW\_Middle Channel\_256QAM\_FullRB

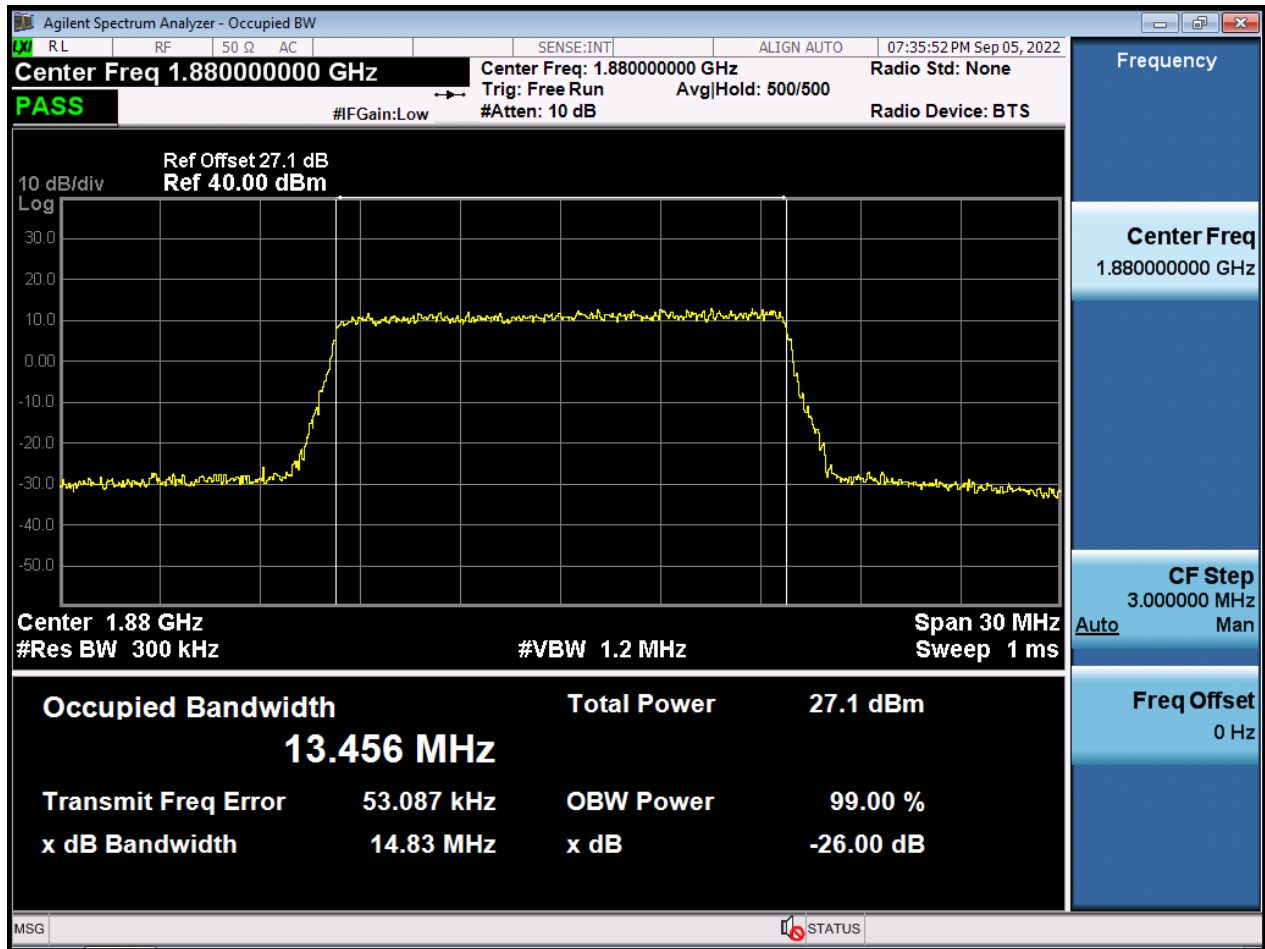


BW20 M\_OBW\_Middle Channel\_QPSK\_FullIRB

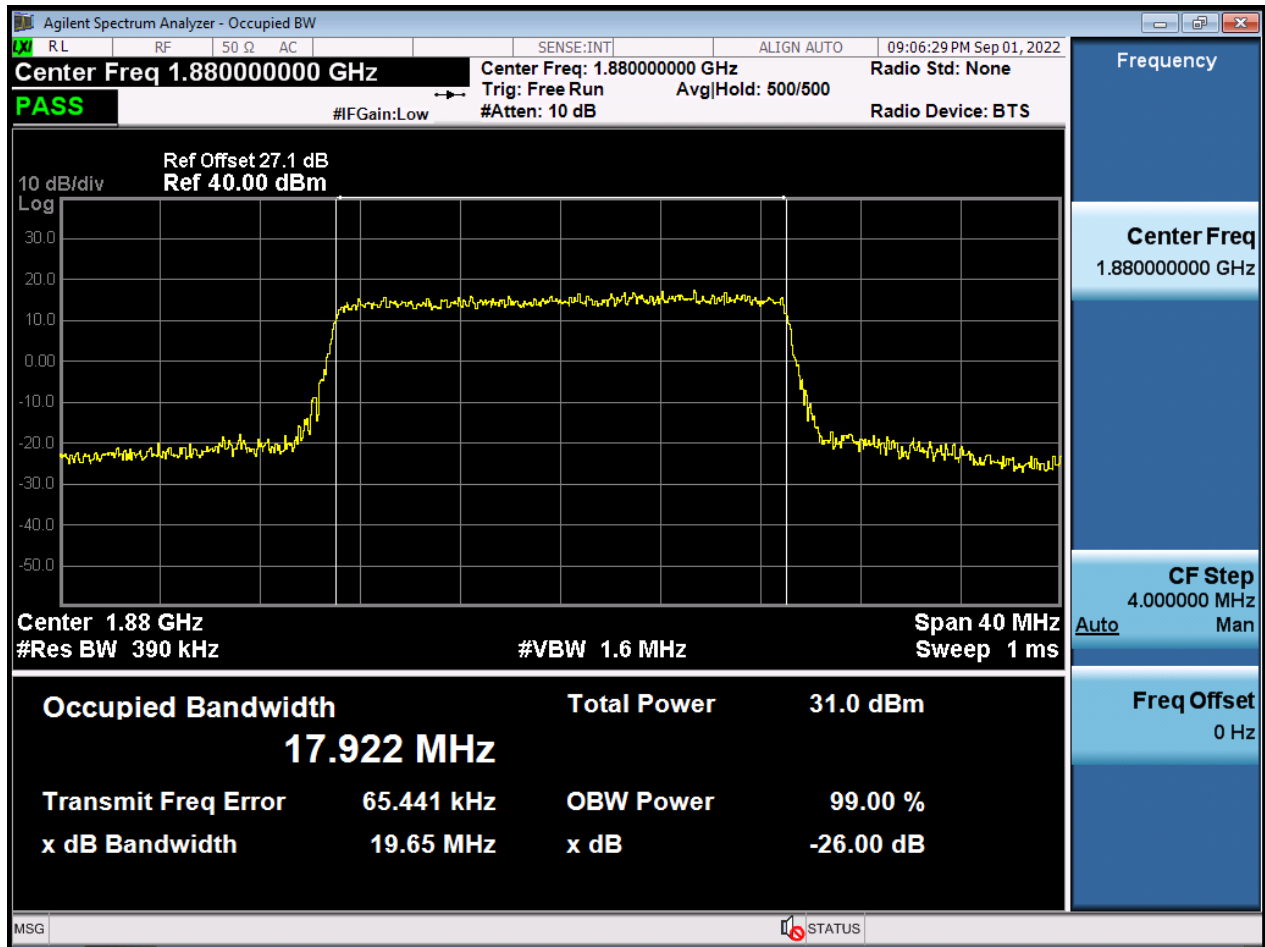


BW20 M\_OBW\_Middle Channel\_16QAM\_FullIRB

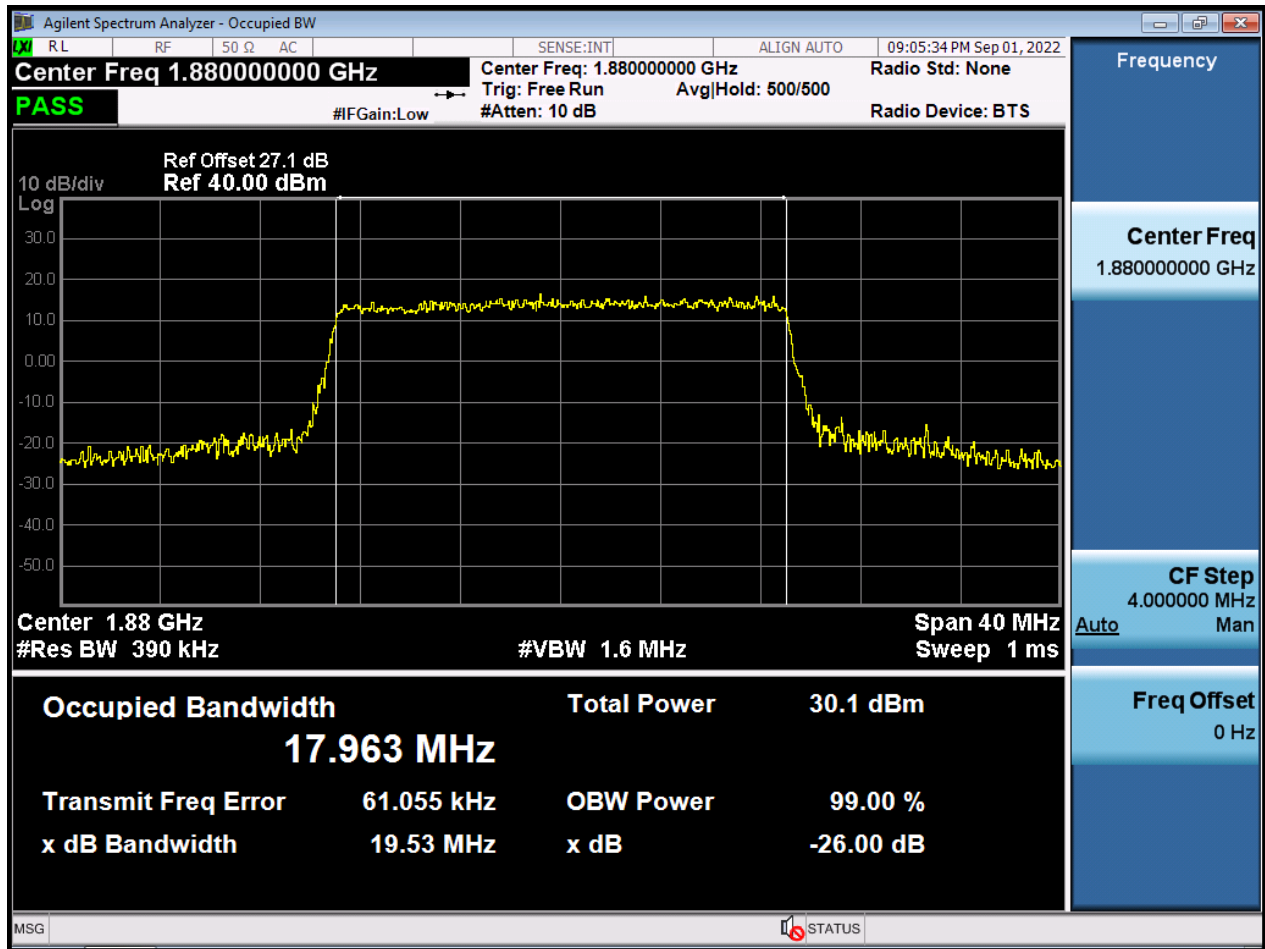


BW20 M\_OBW\_Middle Channel\_64QAM\_FullIRB

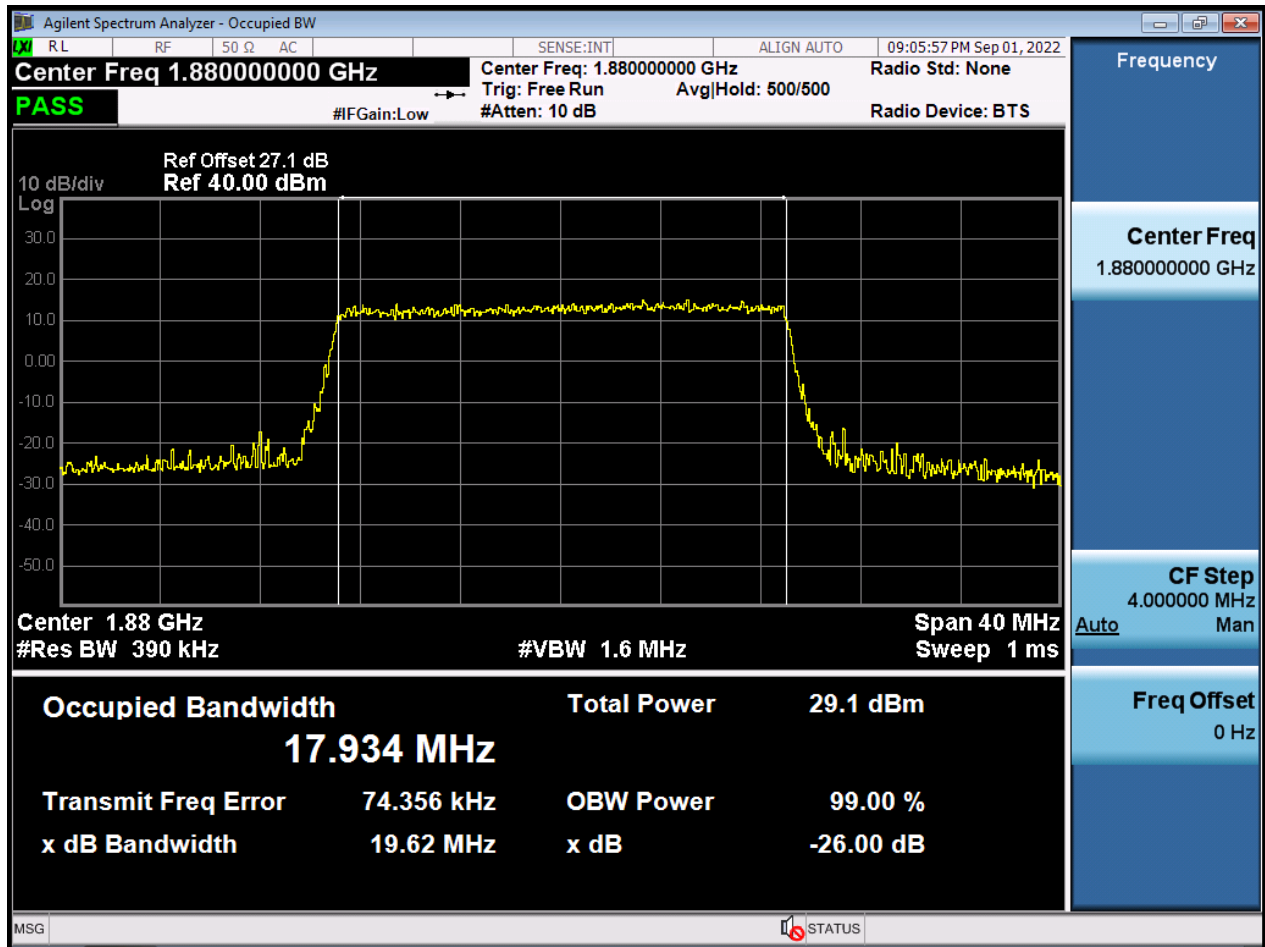

BW20 M\_OBW\_Middle Channel\_256QAM\_FullRB

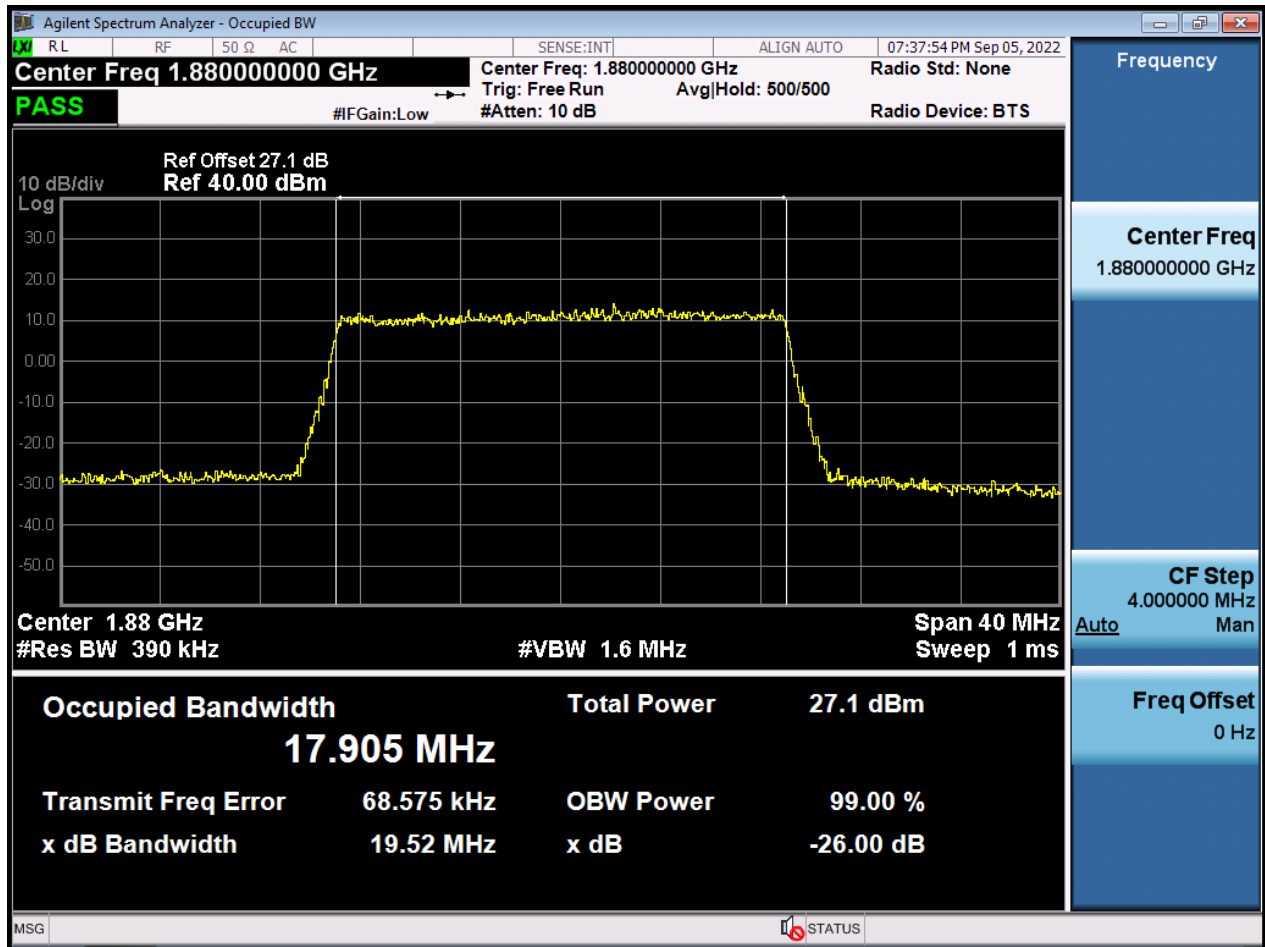


BW1.4 M\_PAR\_Middle Channel\_QPSK\_FullIRB

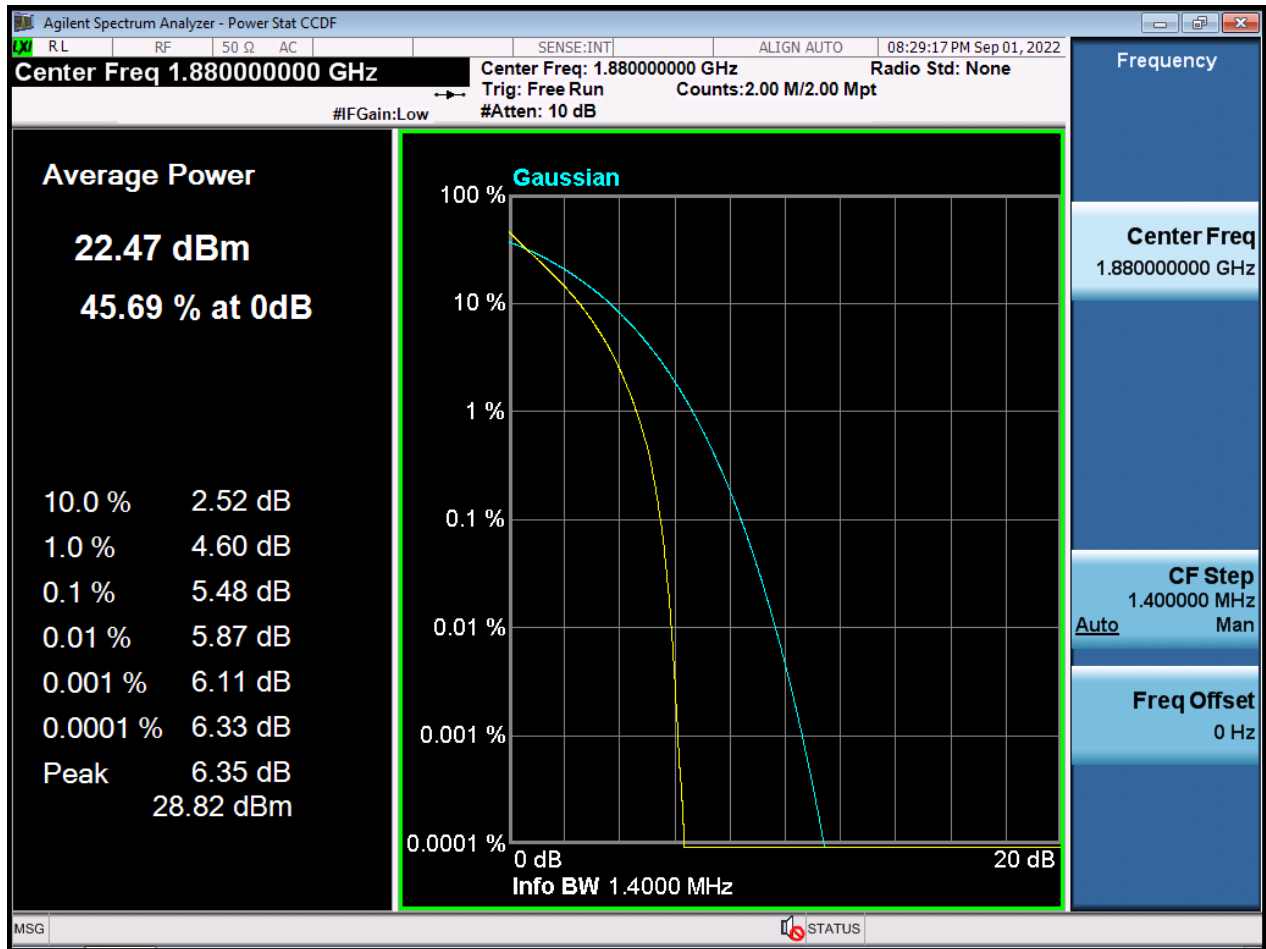





BW1.4 M\_PAR\_Middle Channel\_16QAM\_FullRB

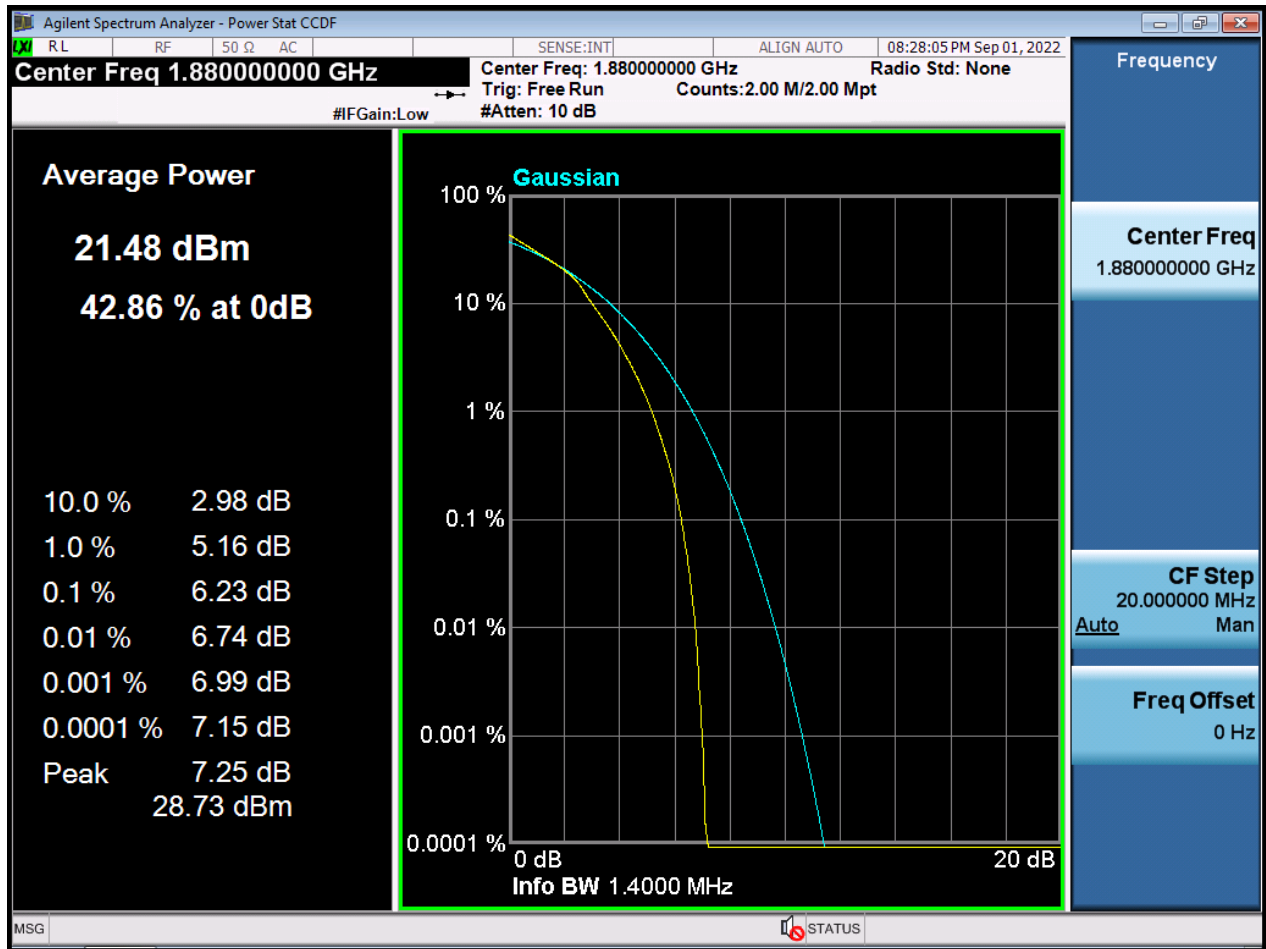


BW1.4 M\_PAR\_Middle Channel\_64QAM\_FullRB

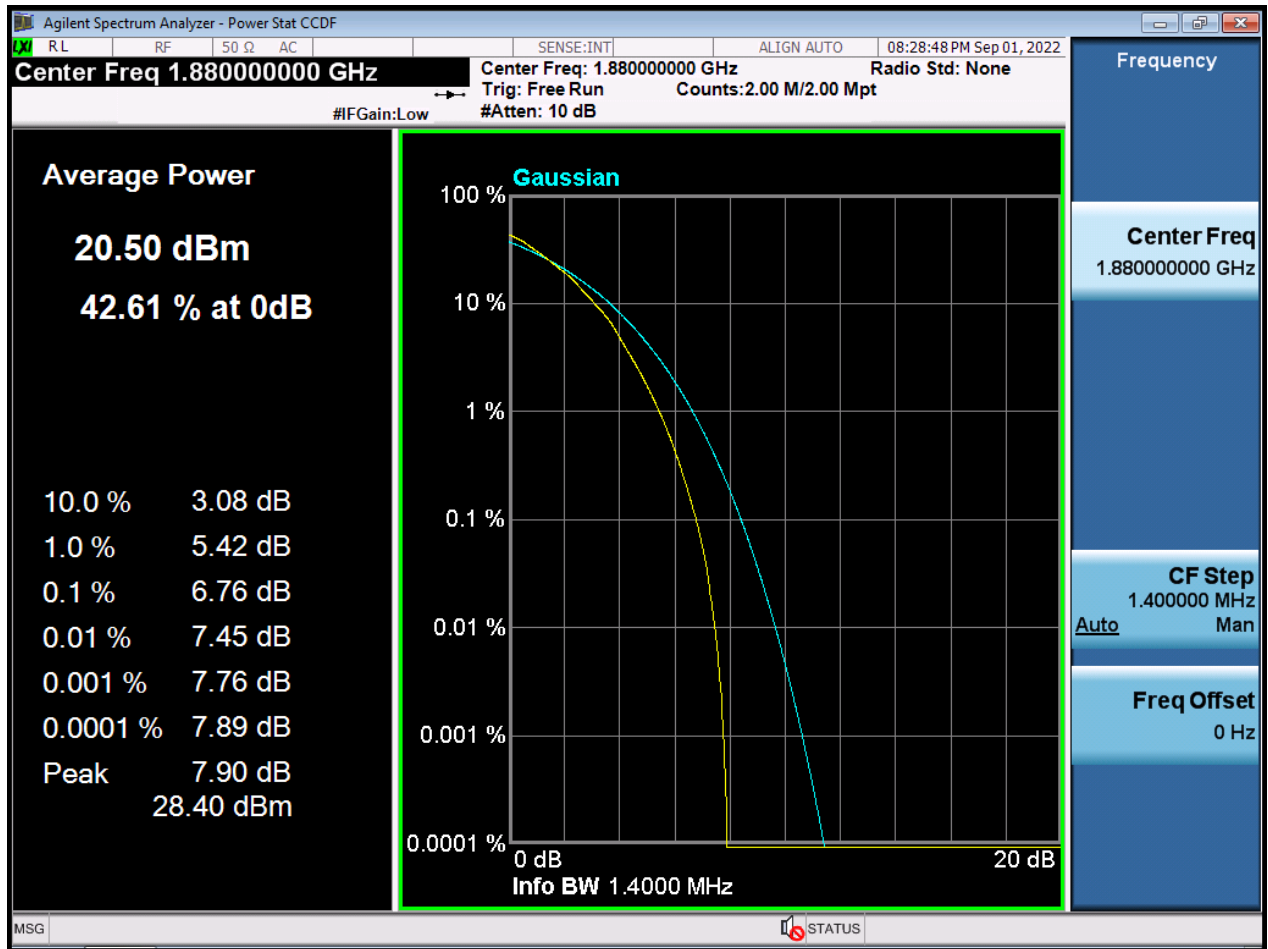


BW1.4 M\_PAR\_Middle Channel\_256QAM\_FullRB

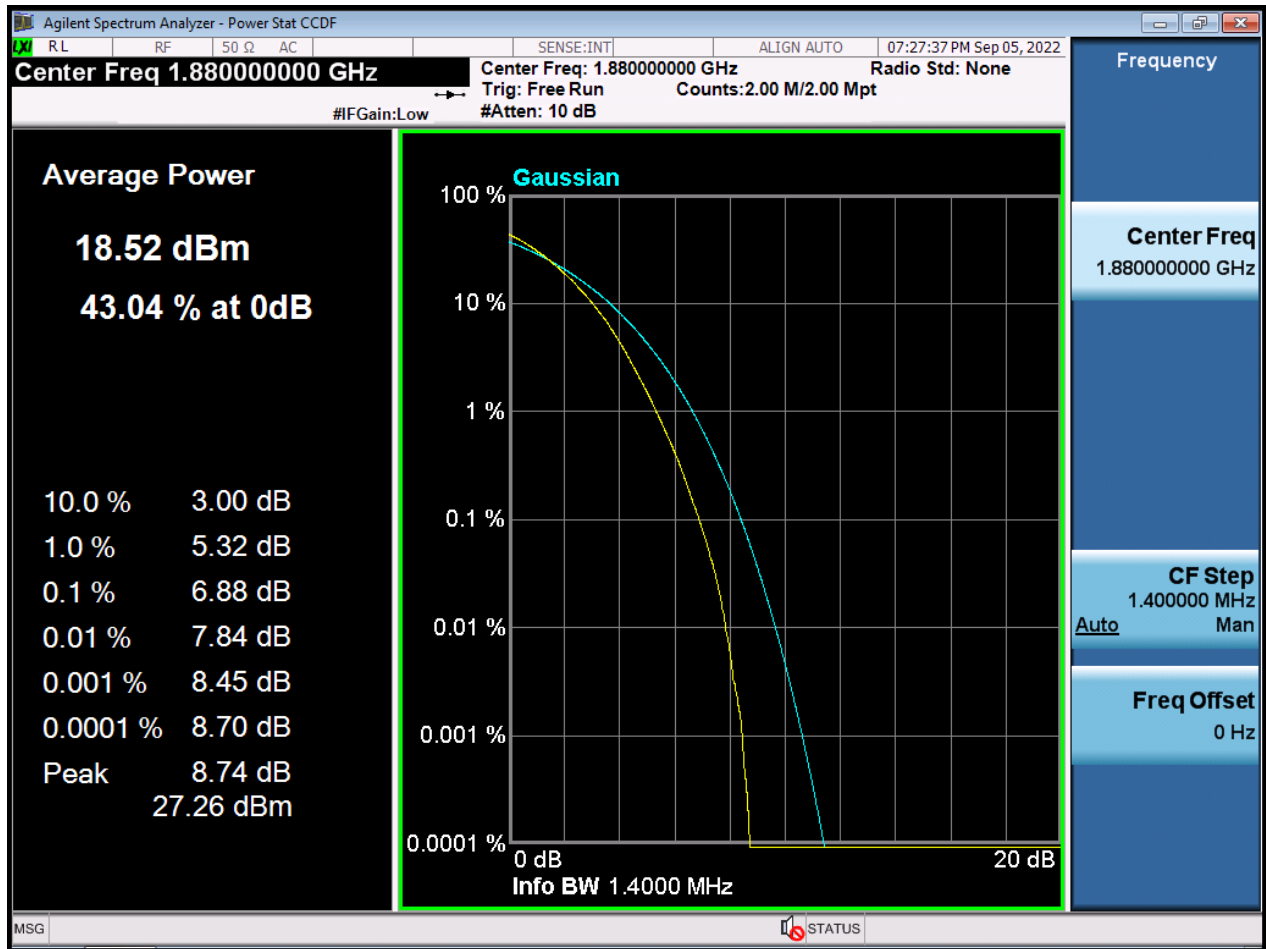


BW3 M\_PAR\_Middle Channel\_QPSK\_FullIRB

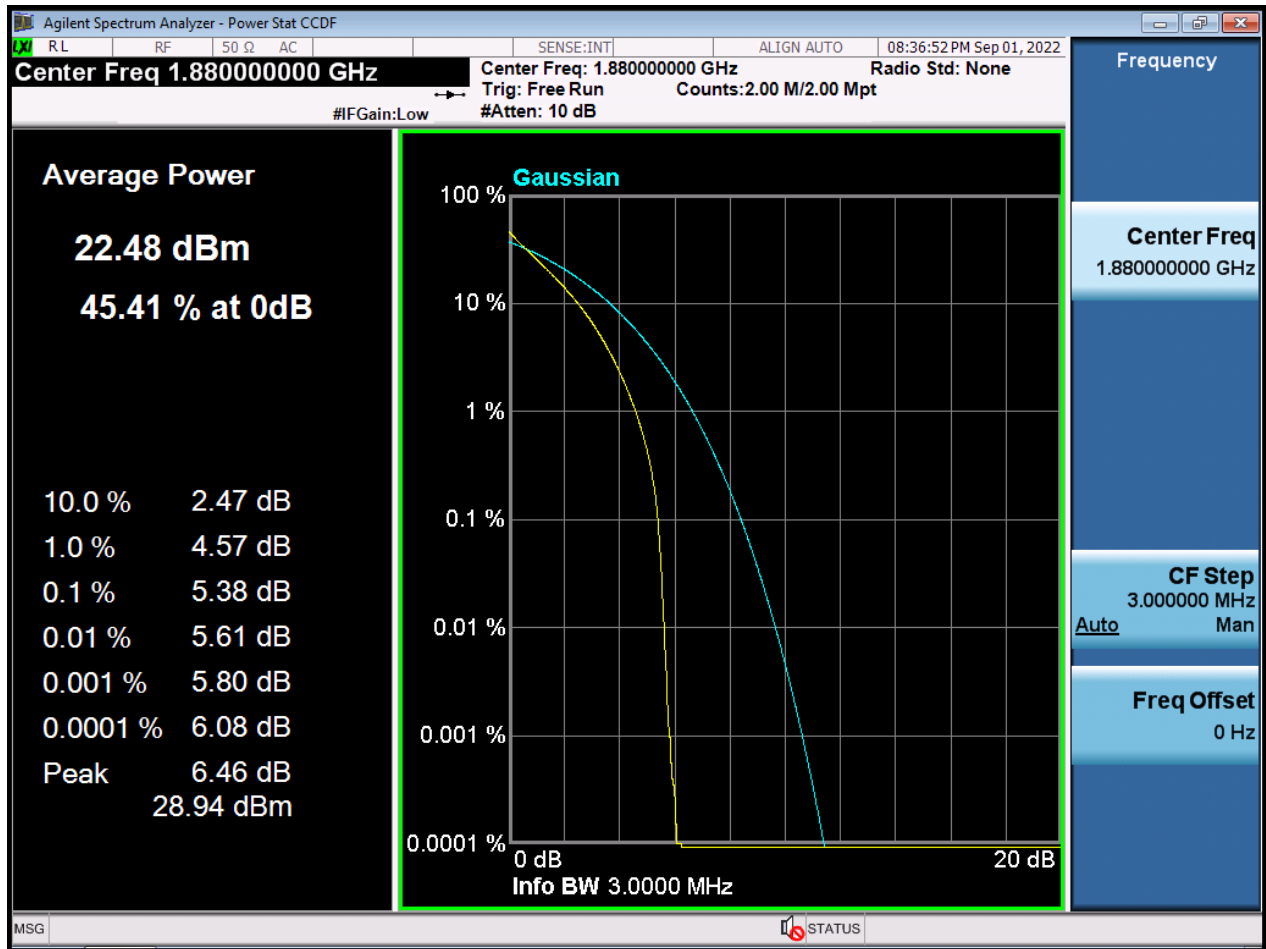


BW3 M\_PAR\_Middle Channel\_16QAM\_FullRB

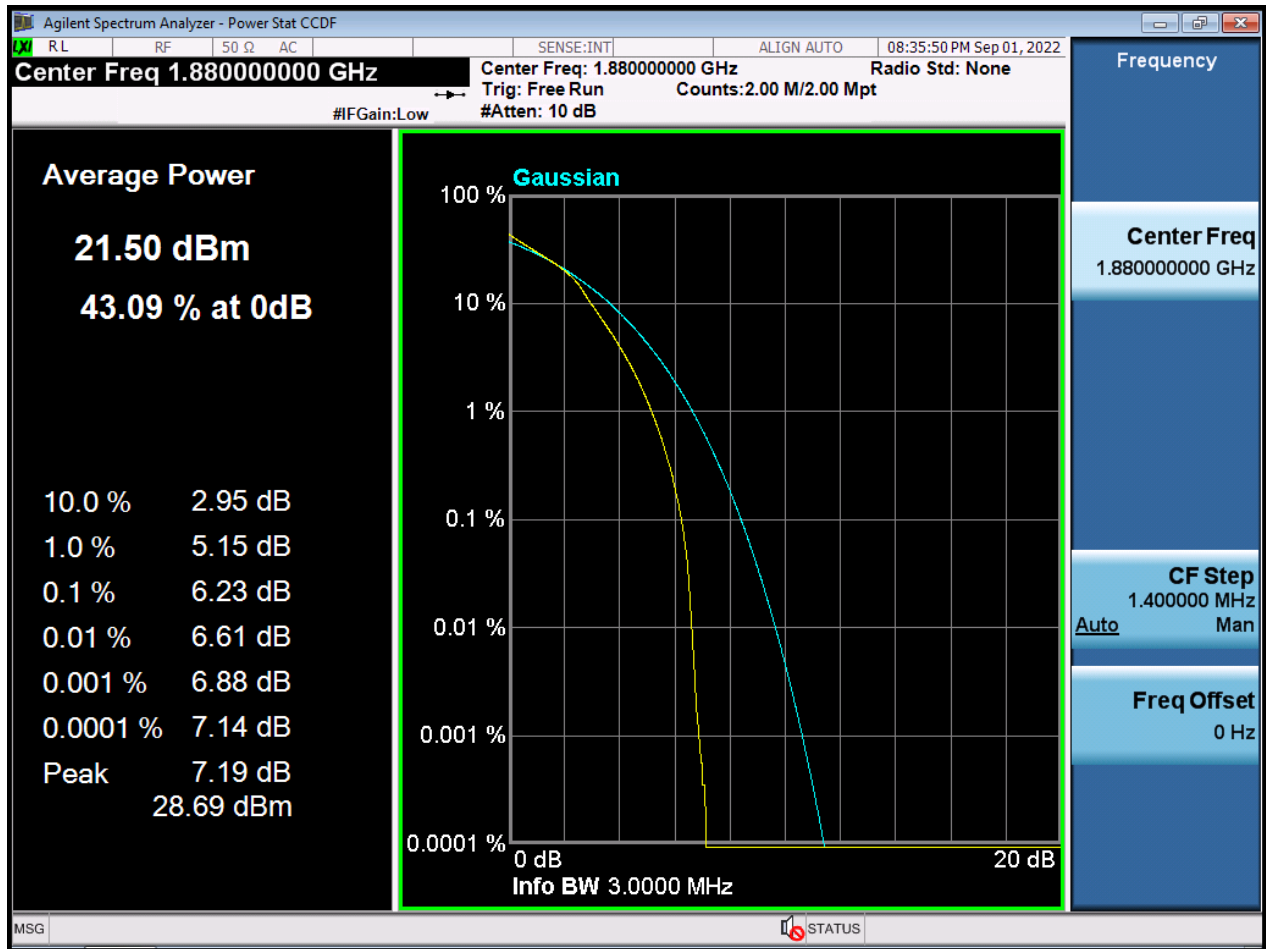


BW3 M\_PAR\_Middle Channel\_64QAM\_FuIRB

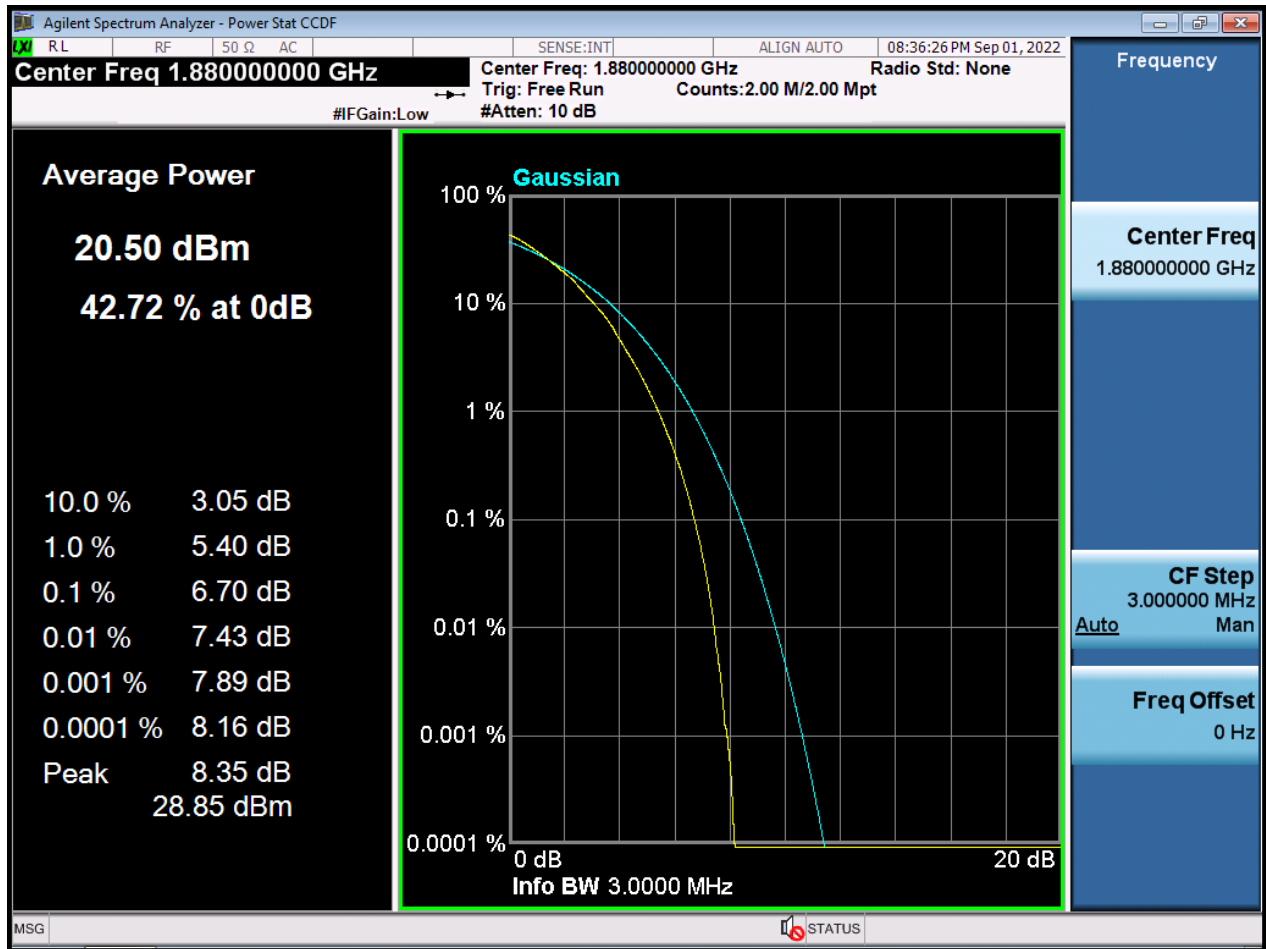

BW3 M\_PAR\_Middle Channel\_256QAM\_FullRB

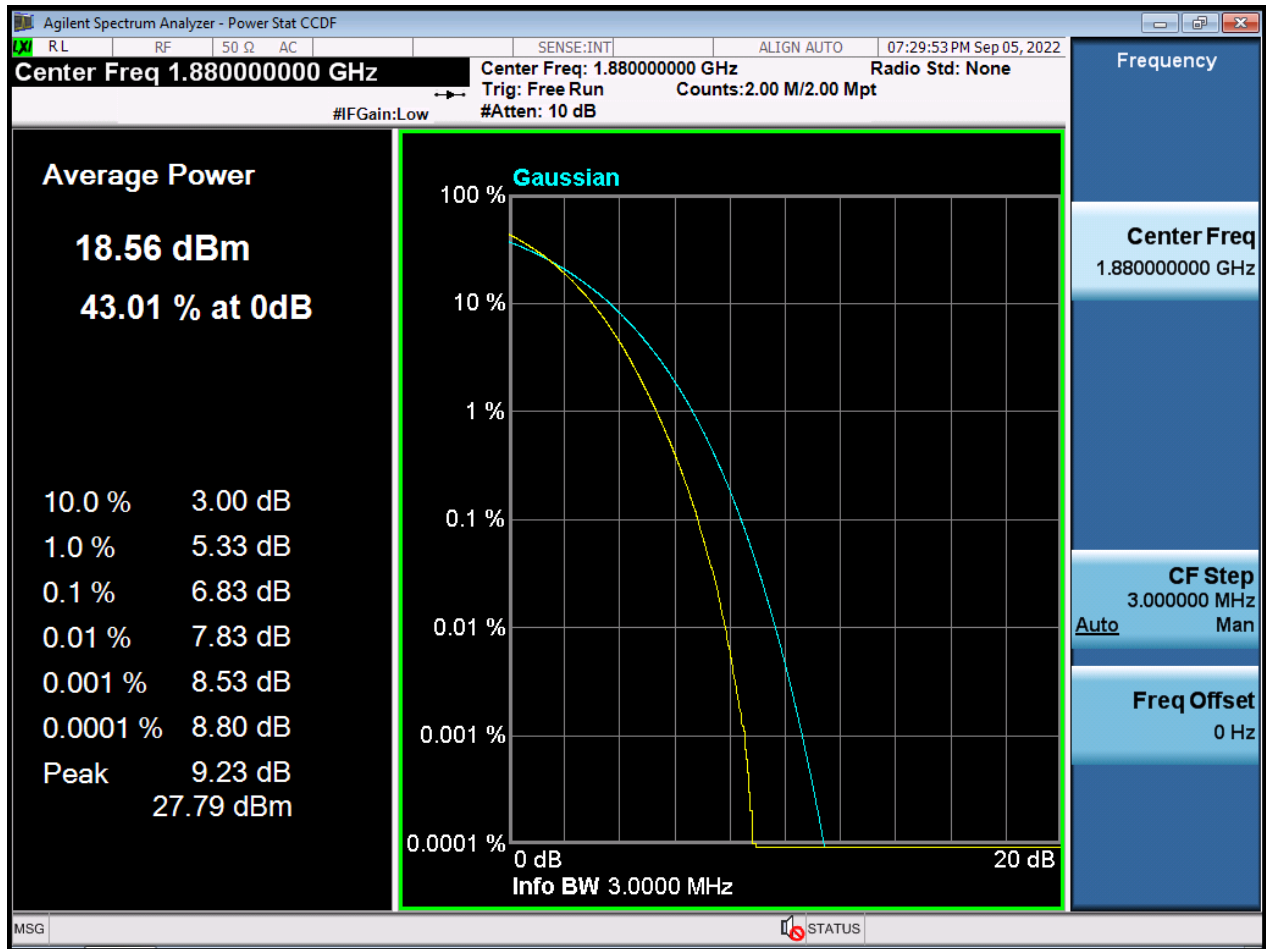


BW5 M\_PAR\_Middle Channel\_QPSK\_FullIRB

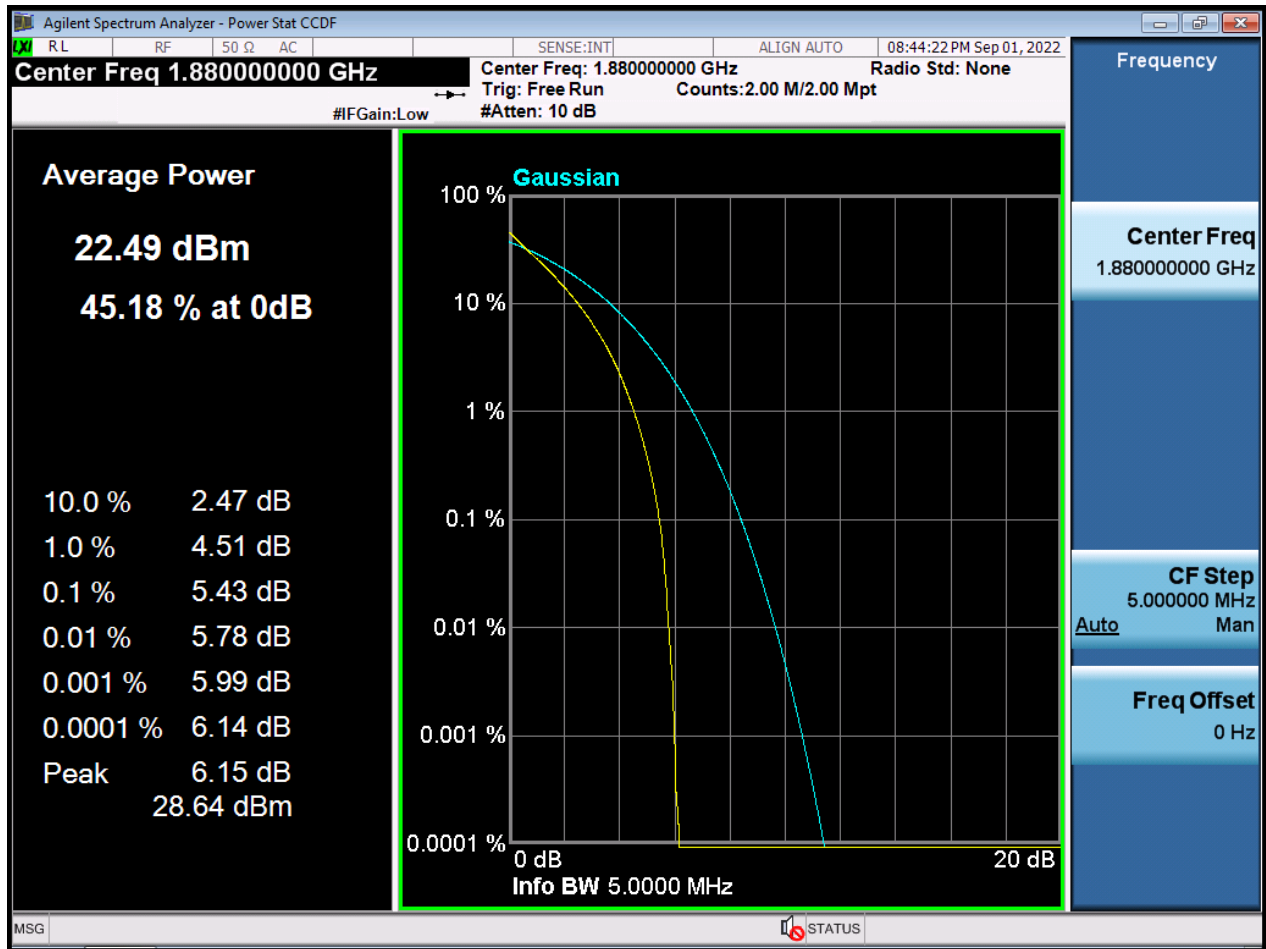





BW5 M\_PAR\_Middle Channel\_16QAM\_FuIRB

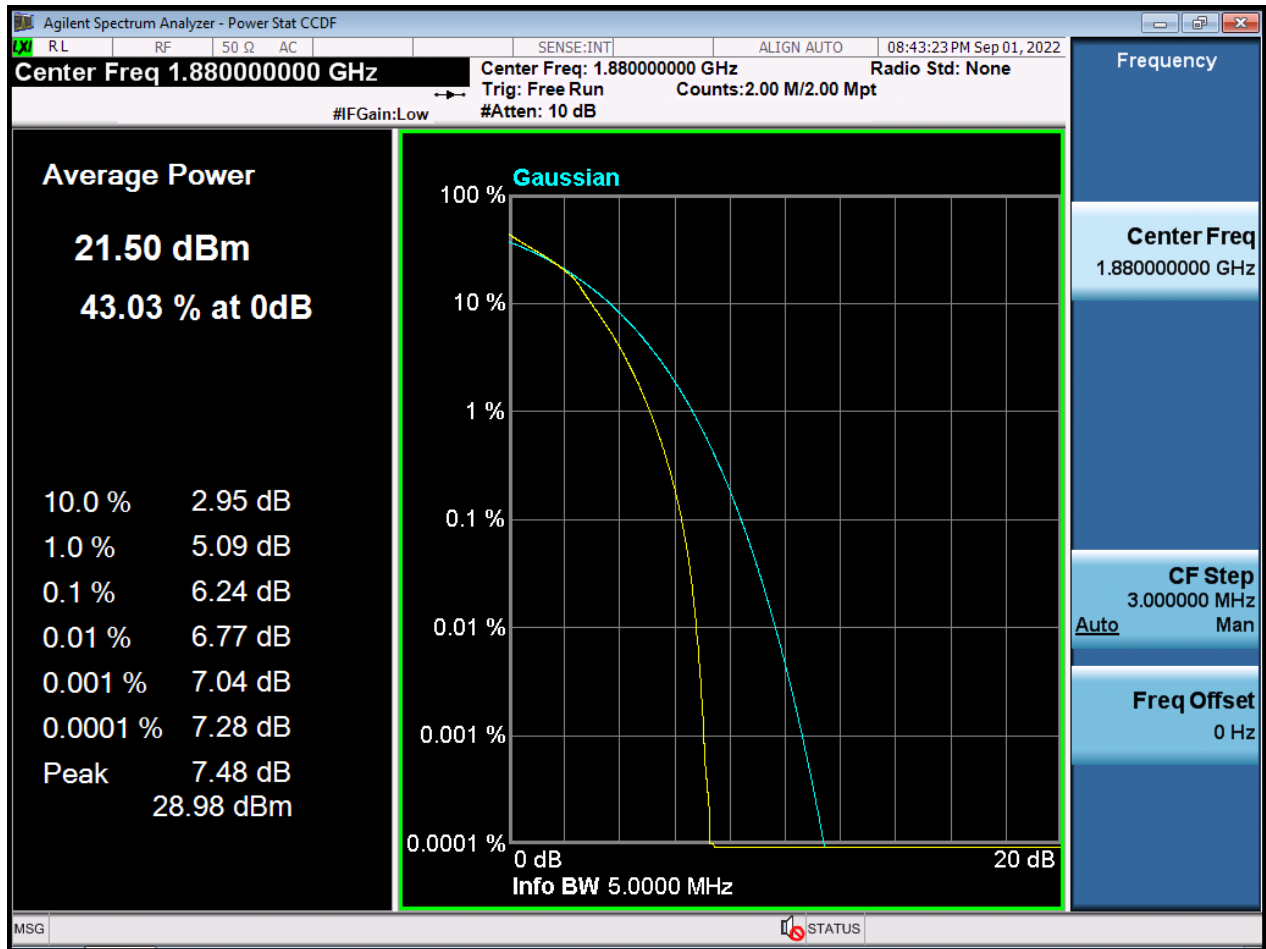


BW5 M\_PAR\_Middle Channel\_64QAM\_FuIRB

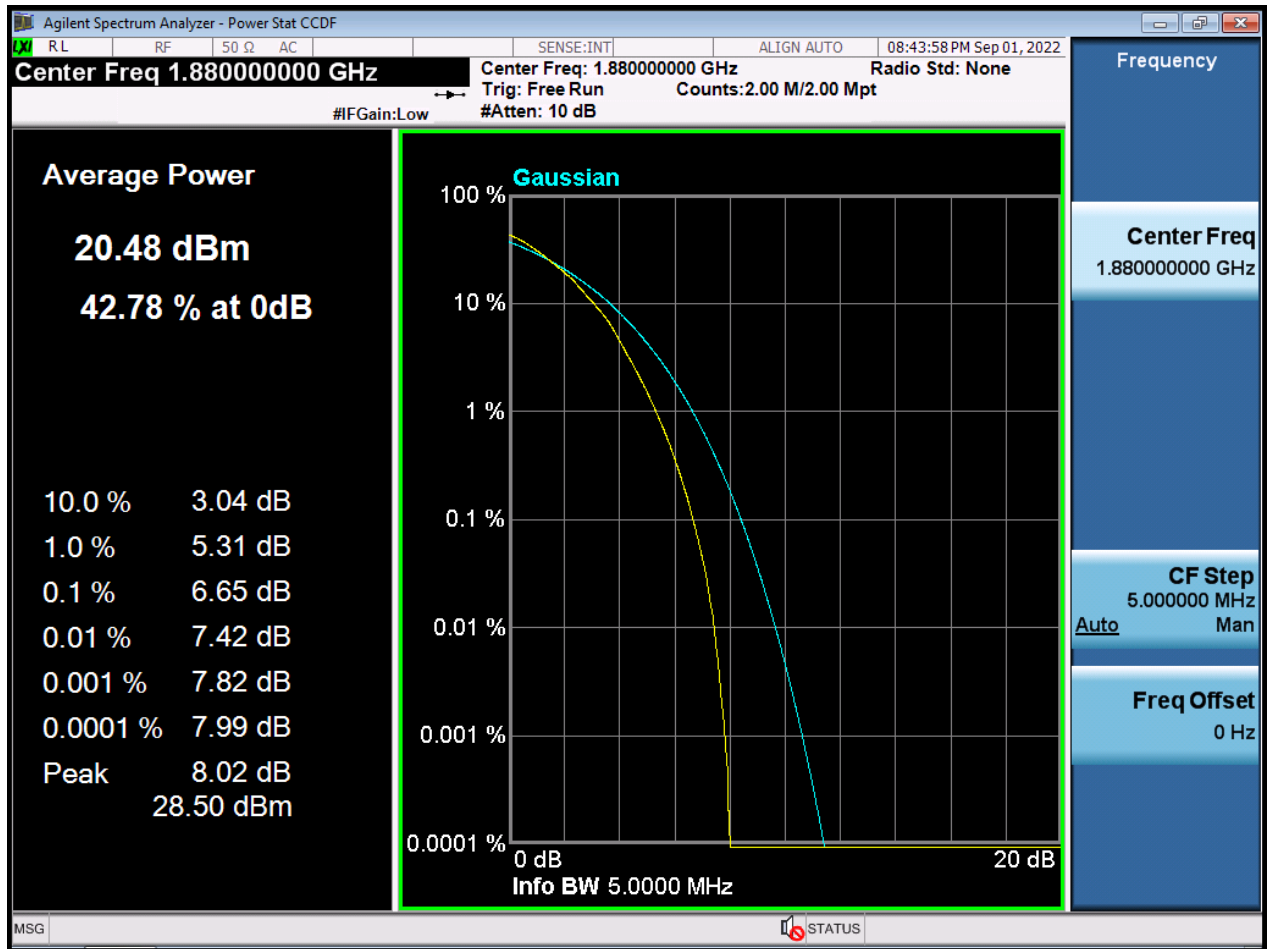


BW5 M\_PAR\_Middle Channel\_256QAM\_FullRB

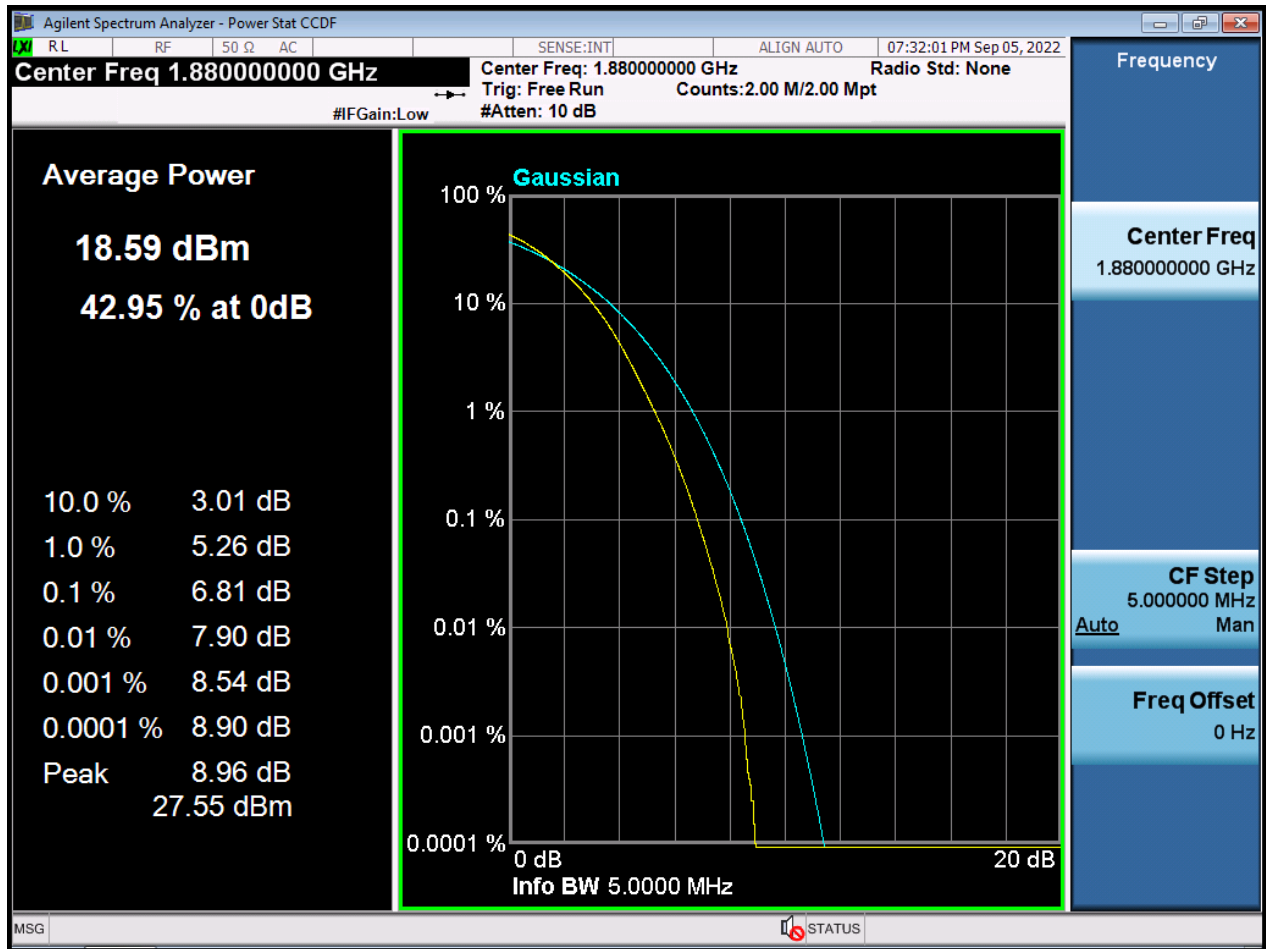


BW10 M\_PAR\_Middle Channelz\_QPSK\_FullRB

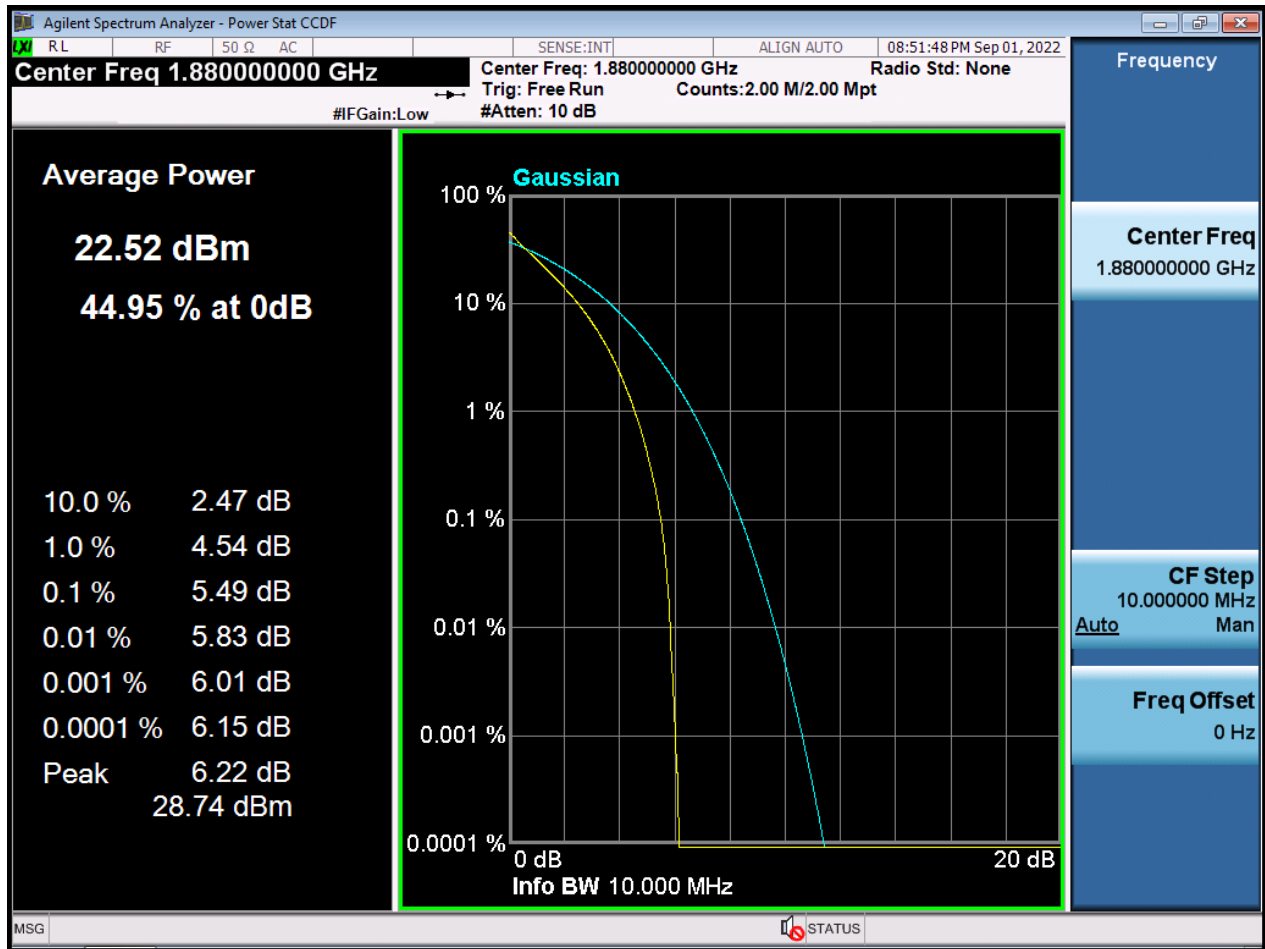


BW10 M\_PAR\_Middle Channel\_16QAM\_FullRB

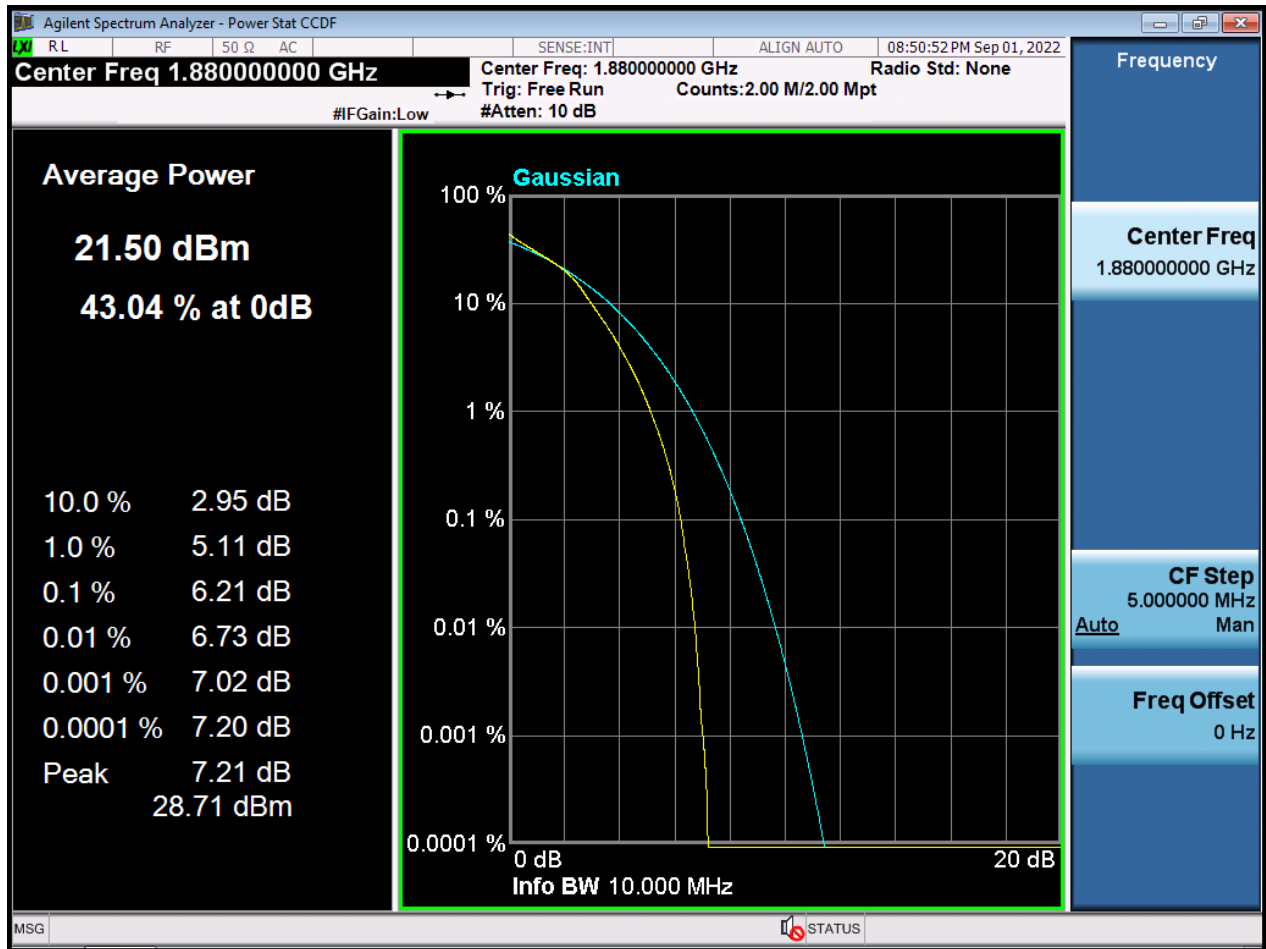


BW10 M\_PAR\_Middle Channel\_64QAM\_FullRB

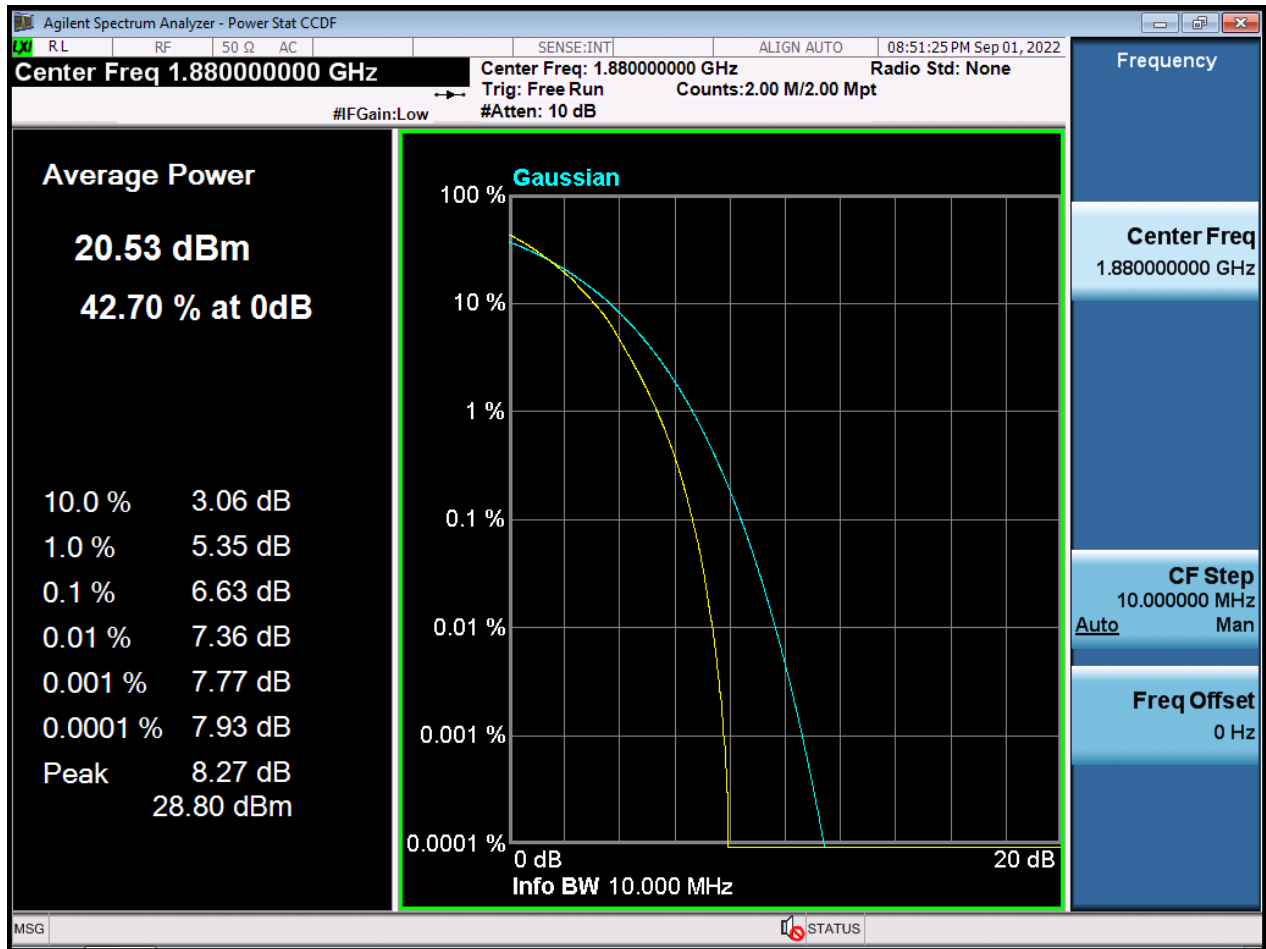

BW10 M\_PAR\_Middle Channel\_256QAM\_FullIRB

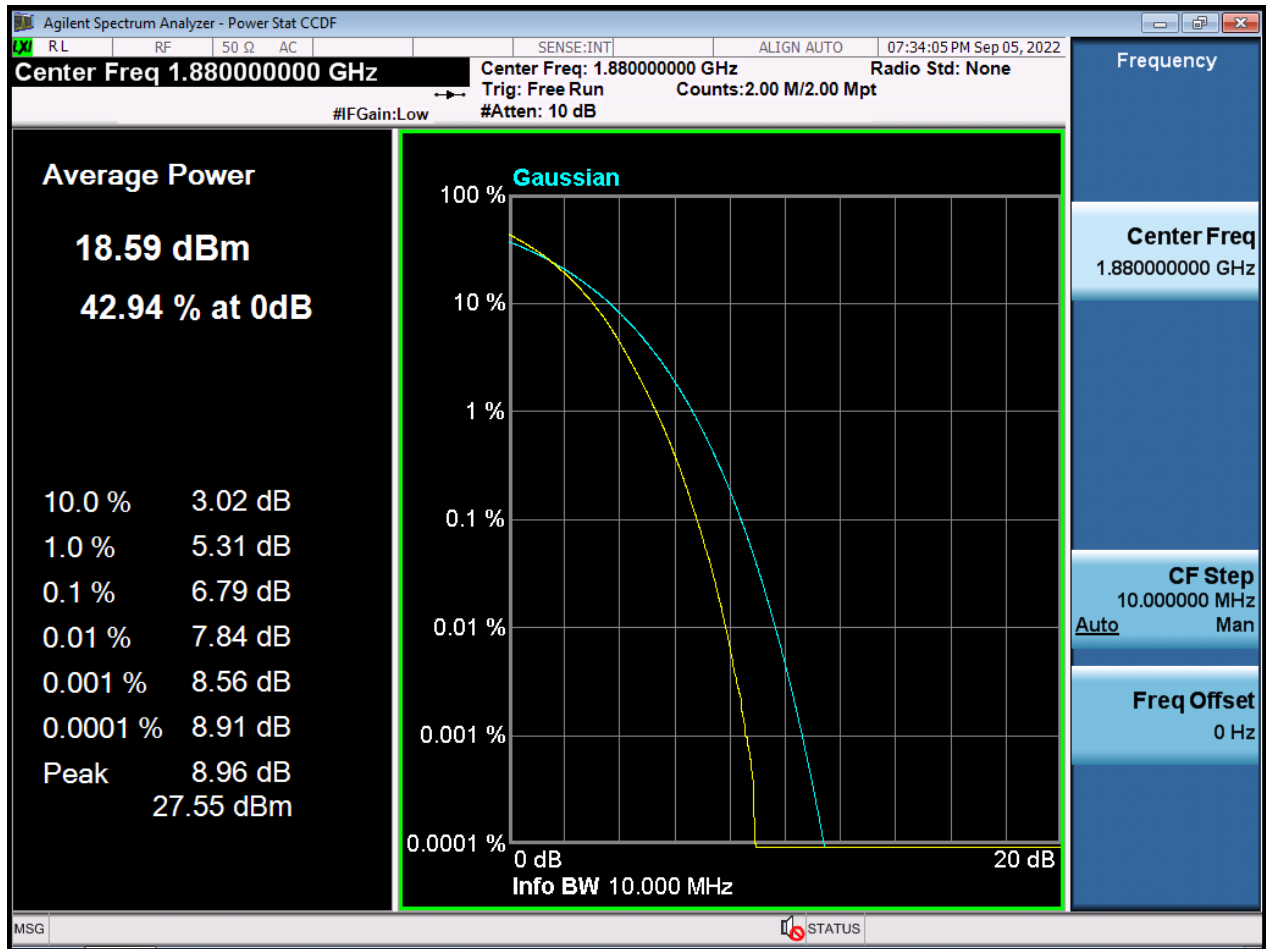


BW15 M\_PAR\_Middle Channel\_QPSK\_FullRB

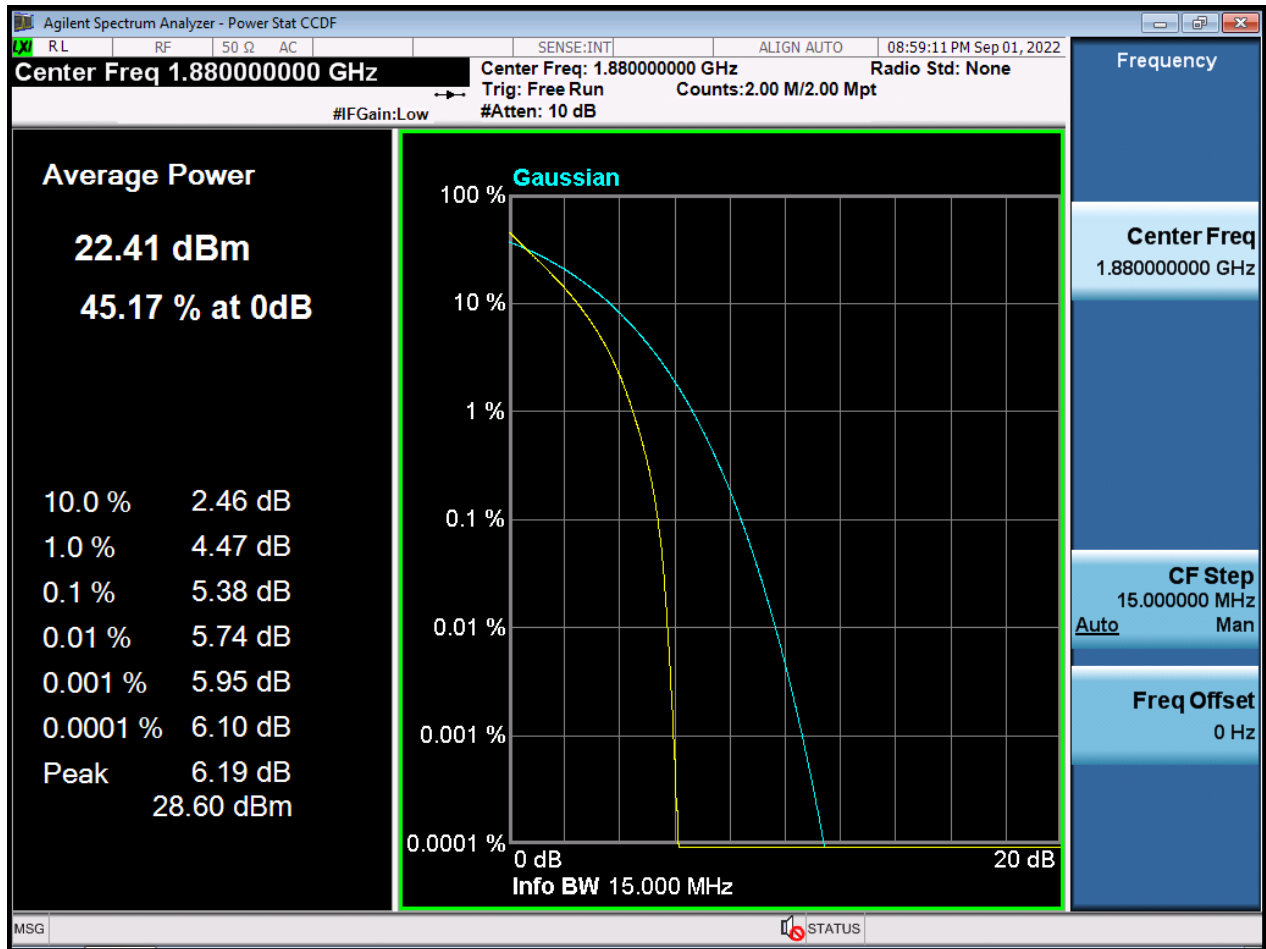





BW15 M\_PAR\_Middle Channel\_16QAM\_FullRB

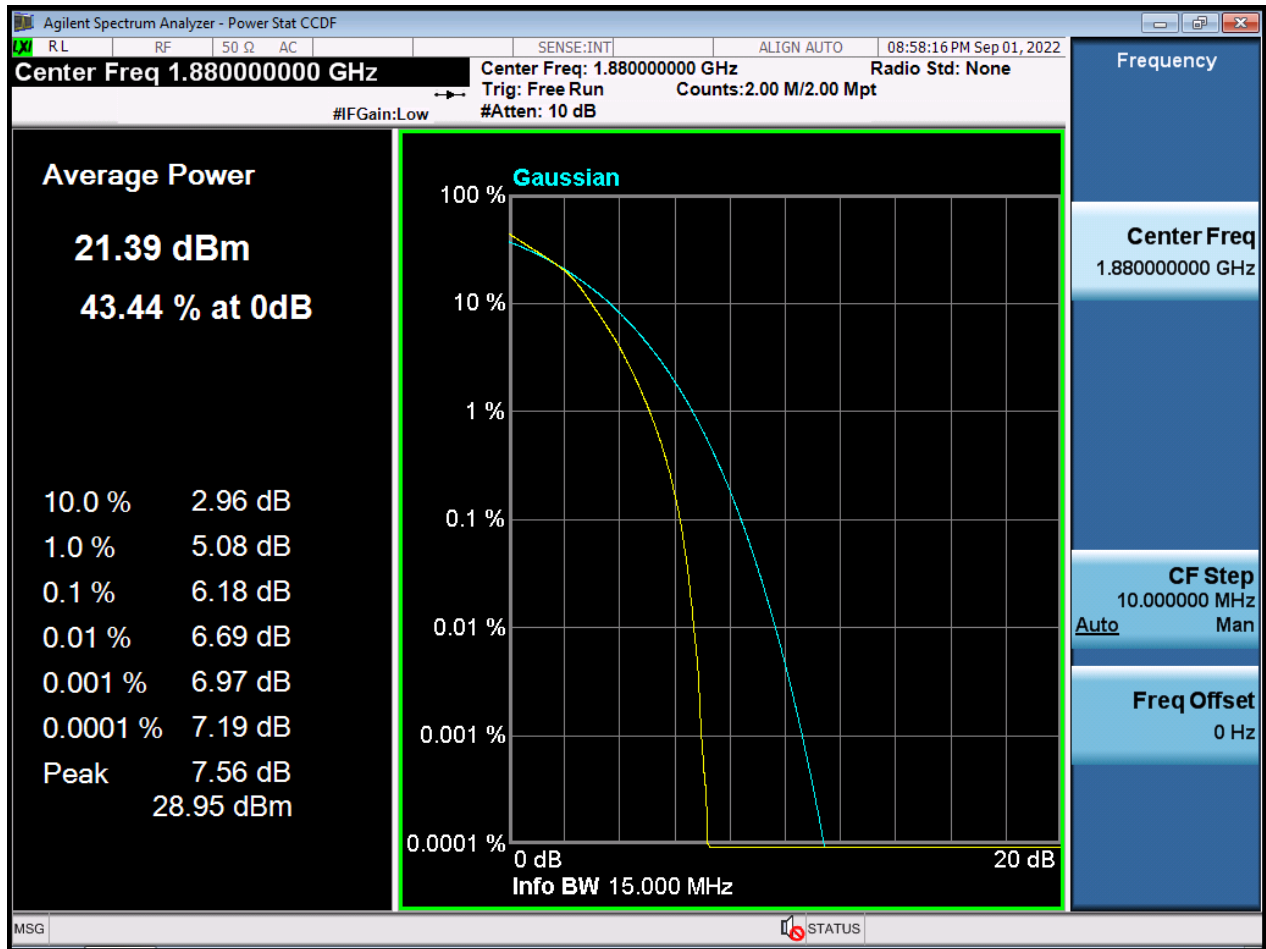


BW15 M\_PAR\_Middle Channel\_64QAM\_FullRB

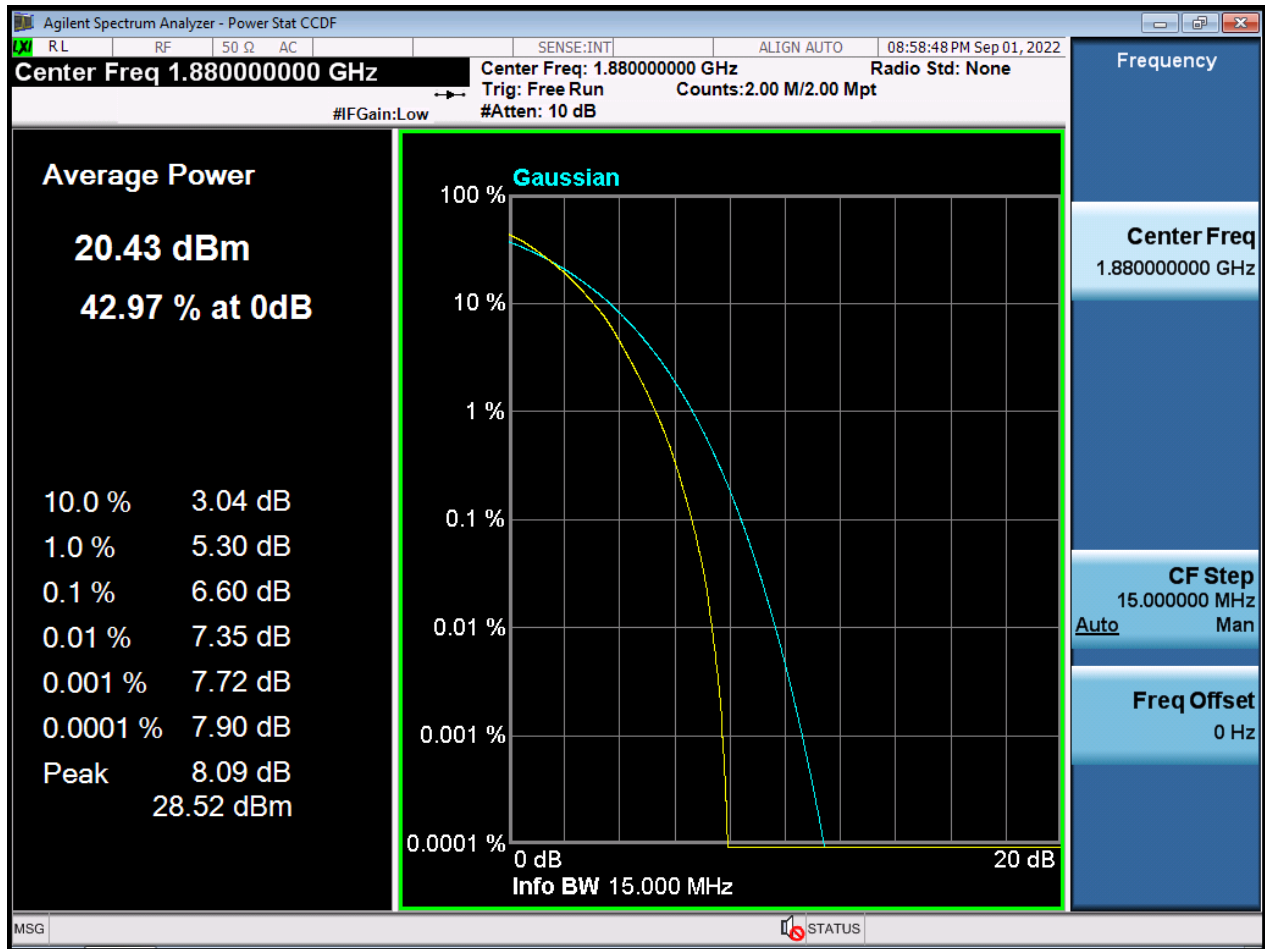


BW15 M\_PAR\_Middle Channel\_256QAM\_FullIRB

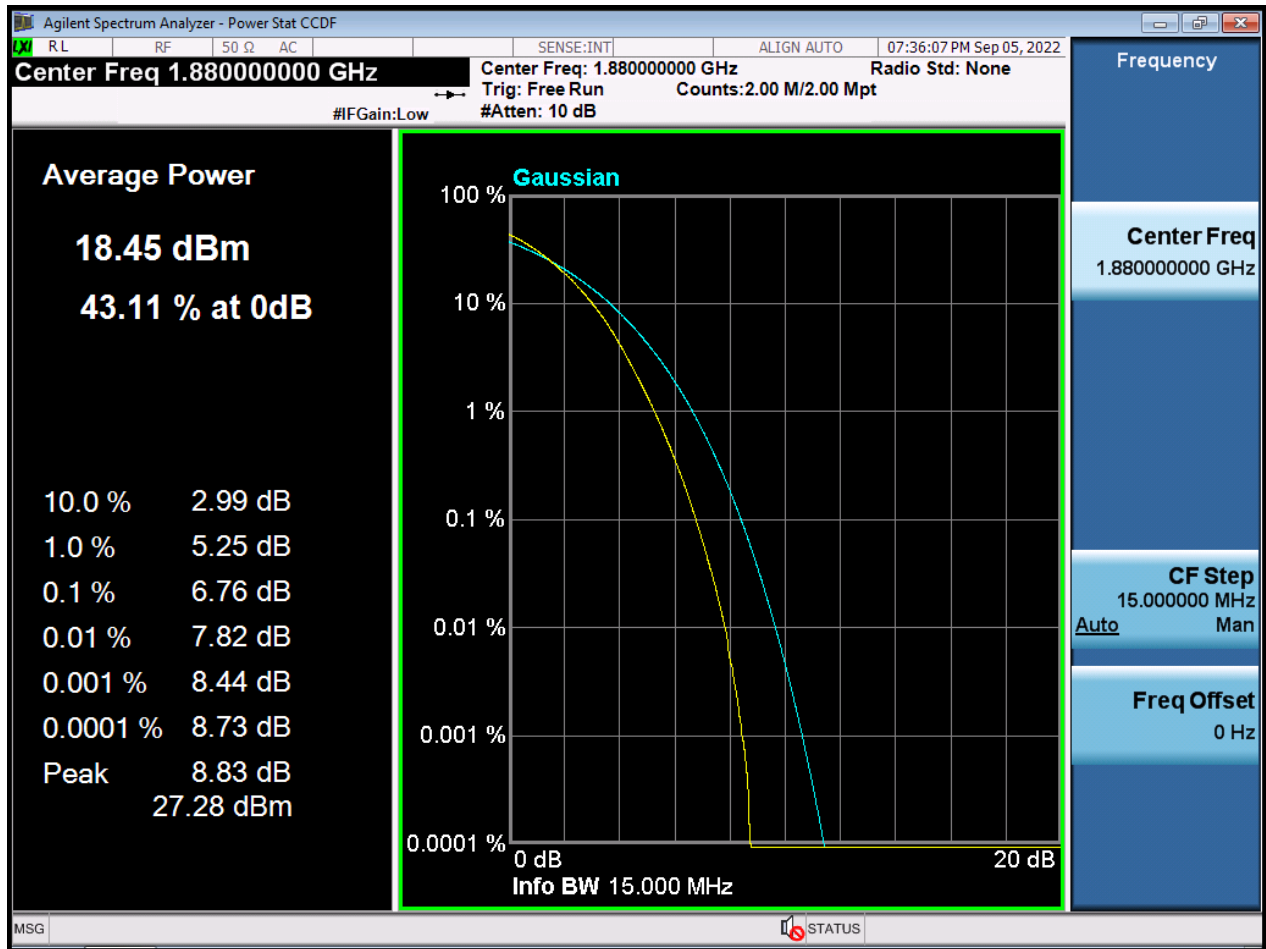


BW20 M\_PAR\_Middle Channel\_QPSK\_FullRB

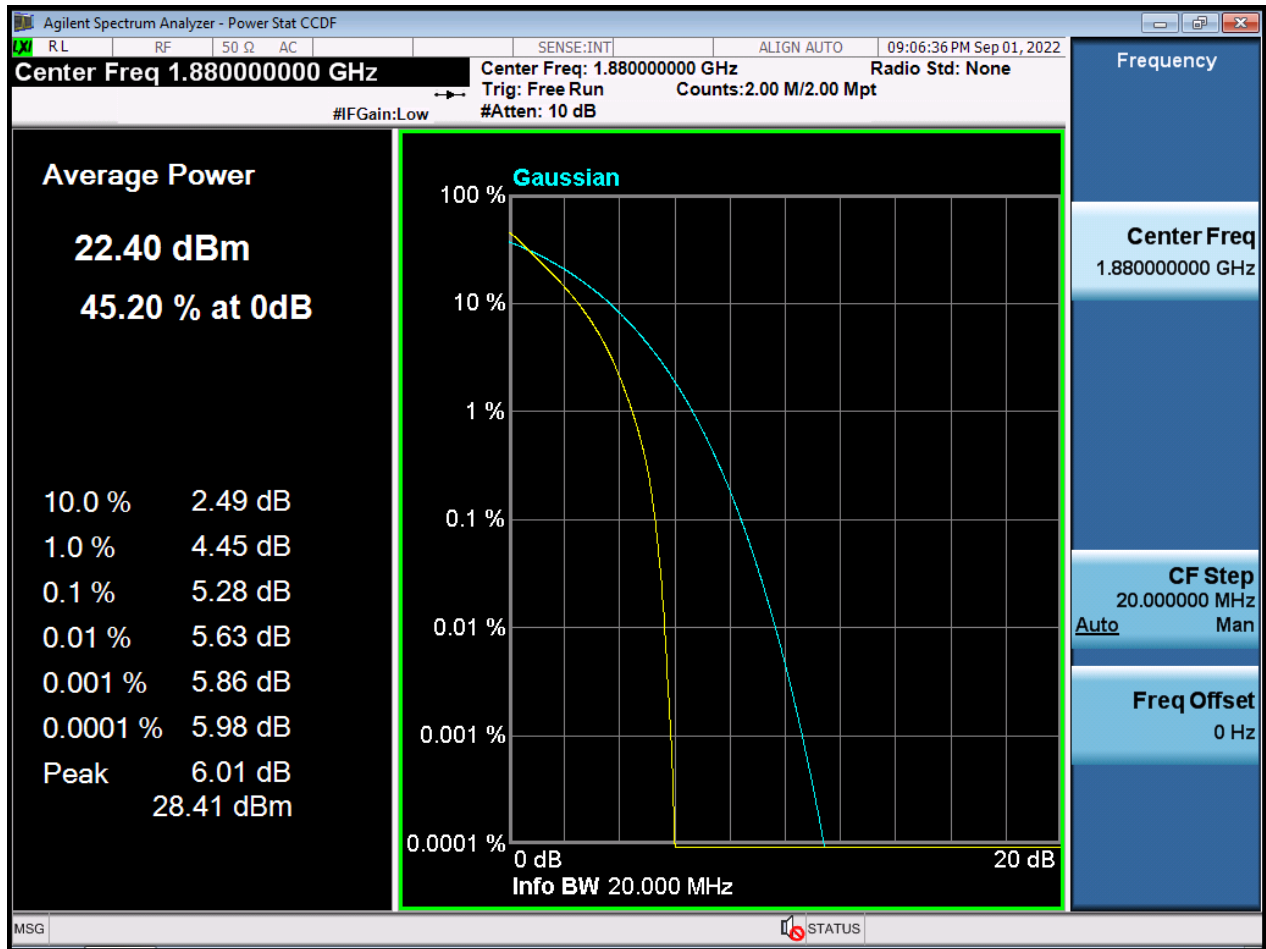


BW20 M\_PAR\_Middle Channel\_16QAM\_FullRB

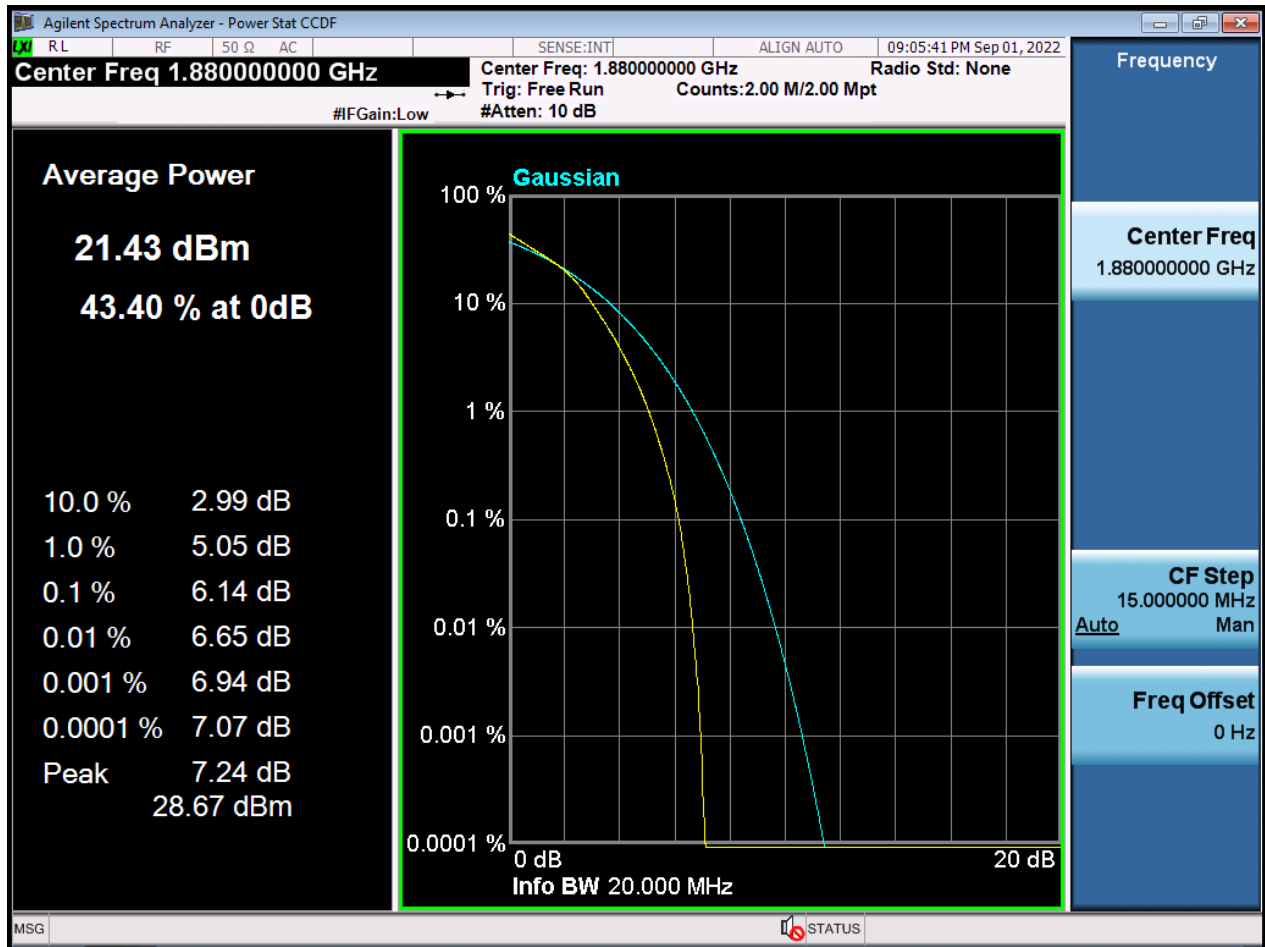


BW20 M\_PAR\_Middle Channel\_64QAM\_FullRB

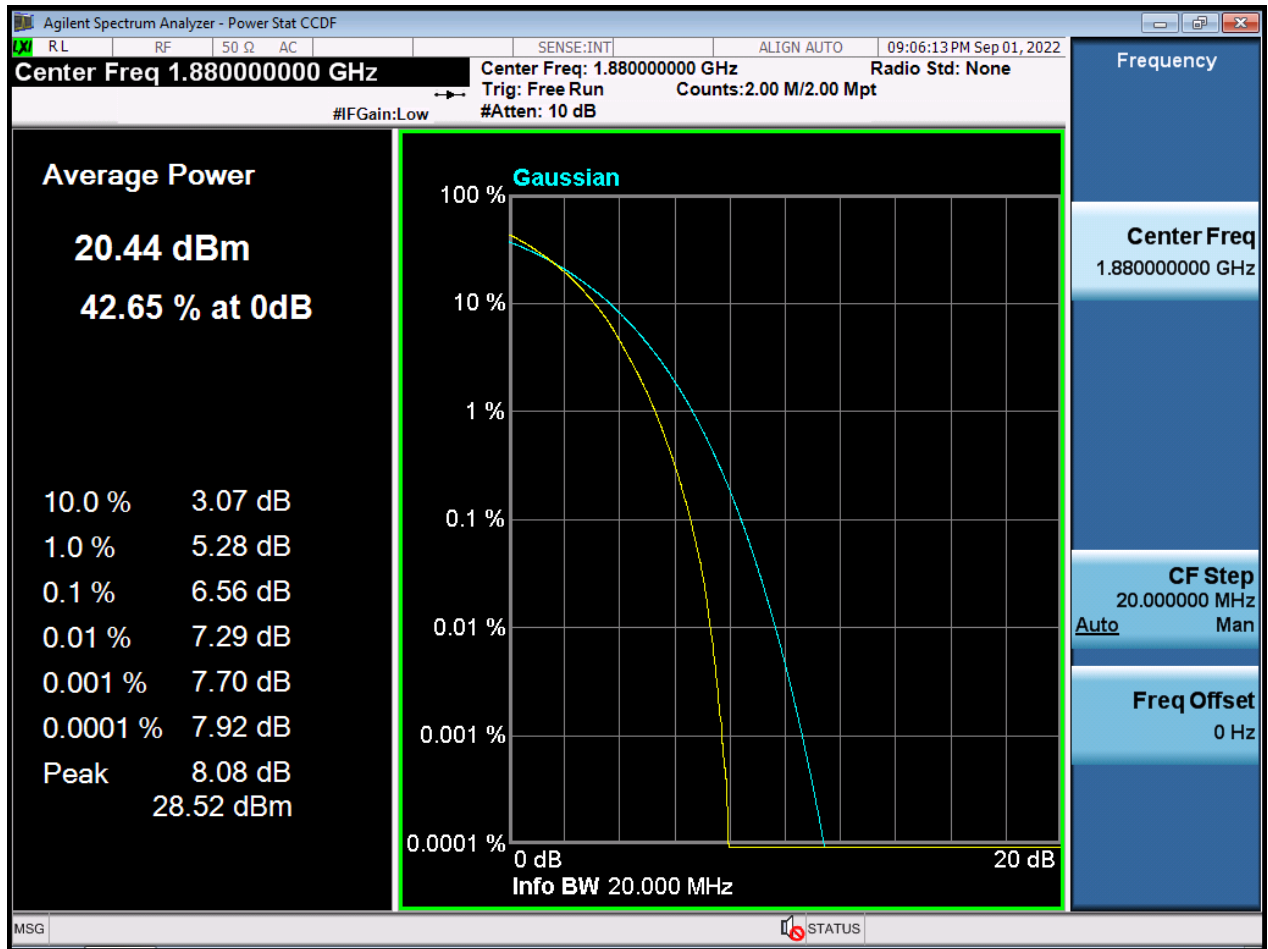

BW20 M\_PAR\_Middle Channel\_256QAM\_FullIRB

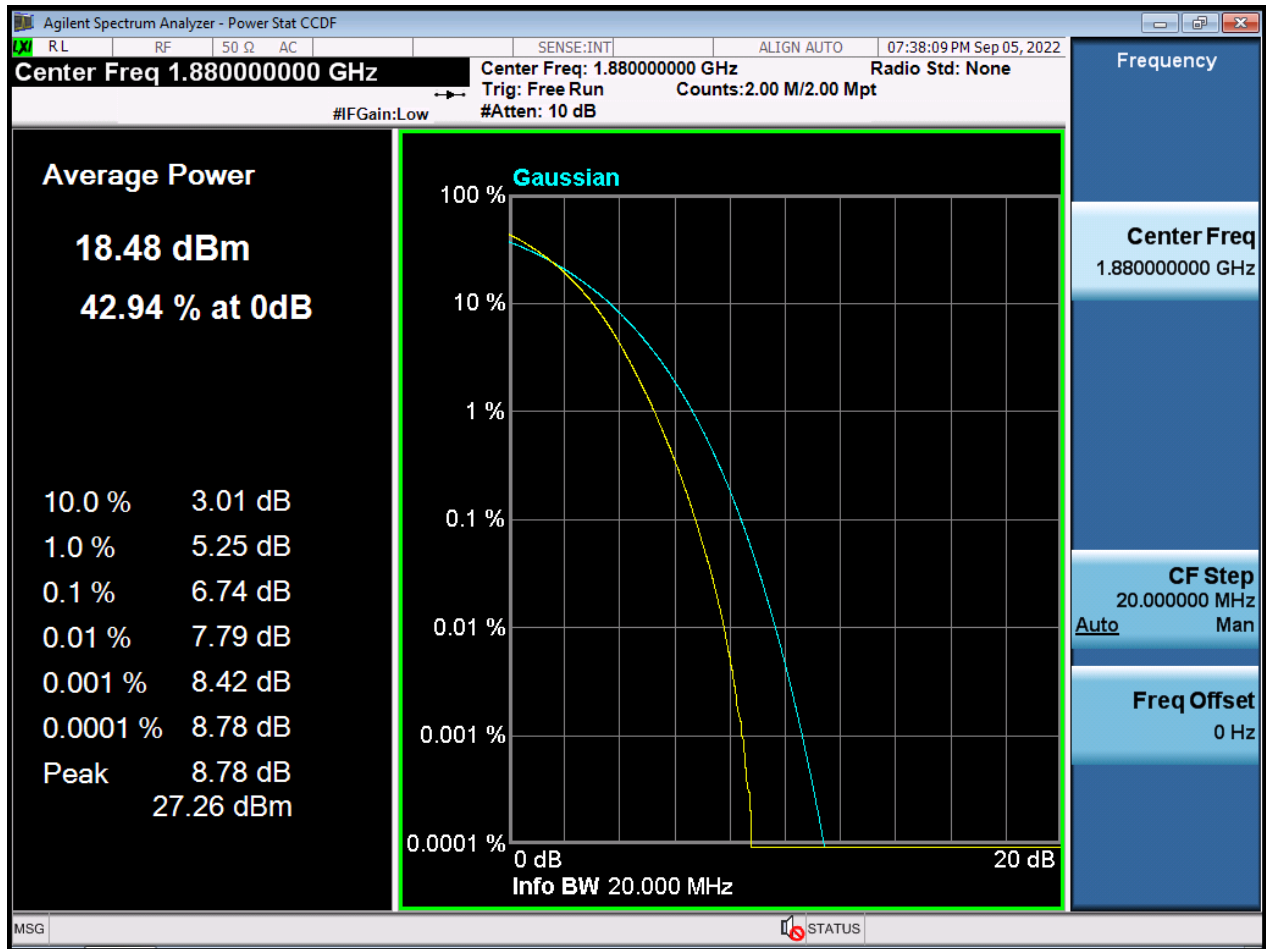


BW1.4 M\_CSE(30 M-10 G)\_Lowest Channel\_QPSK\_1RB

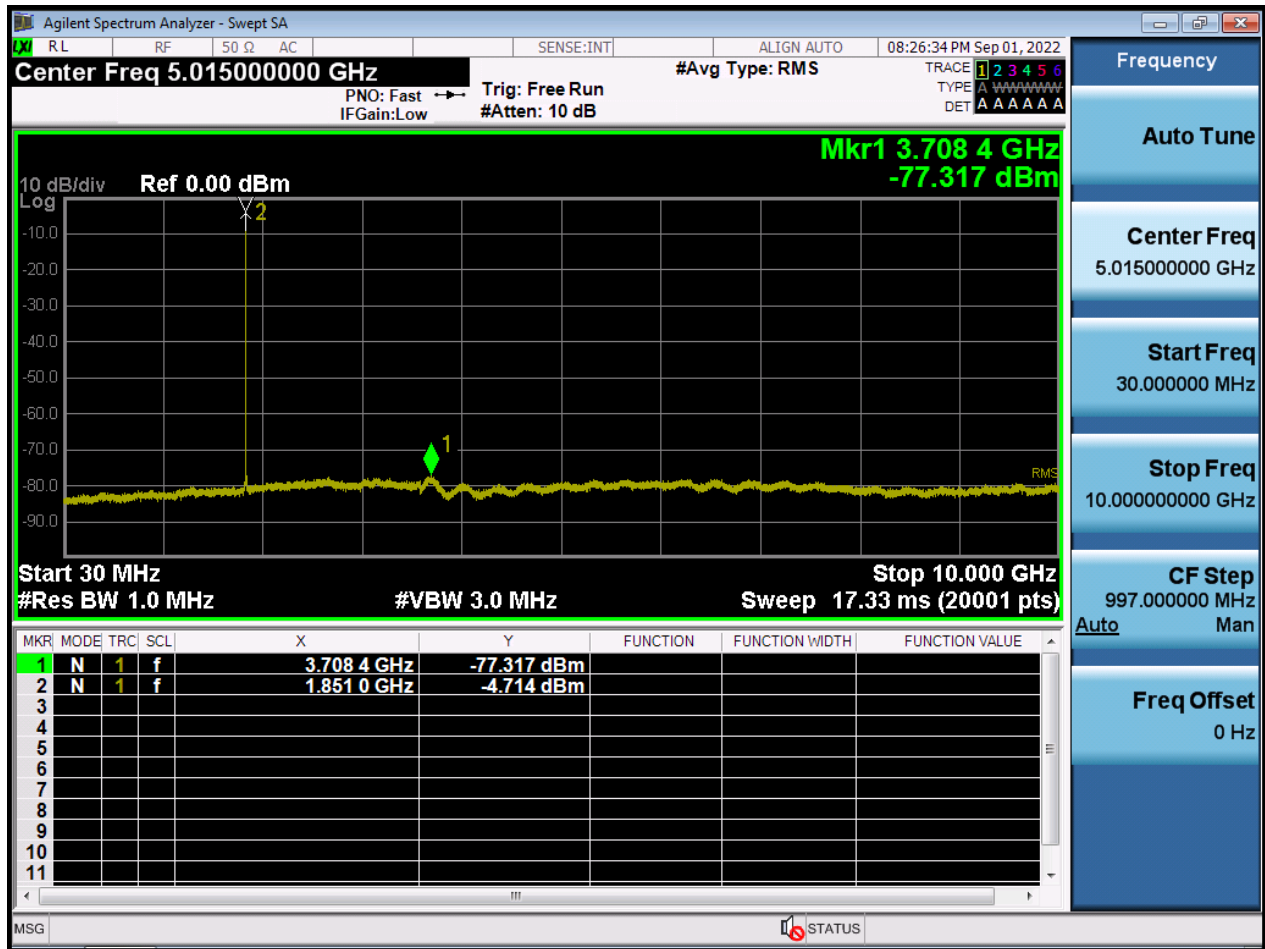





BW1.4 M\_CSE(30 M-10 G)\_Middle Channel\_QPSK\_1RB

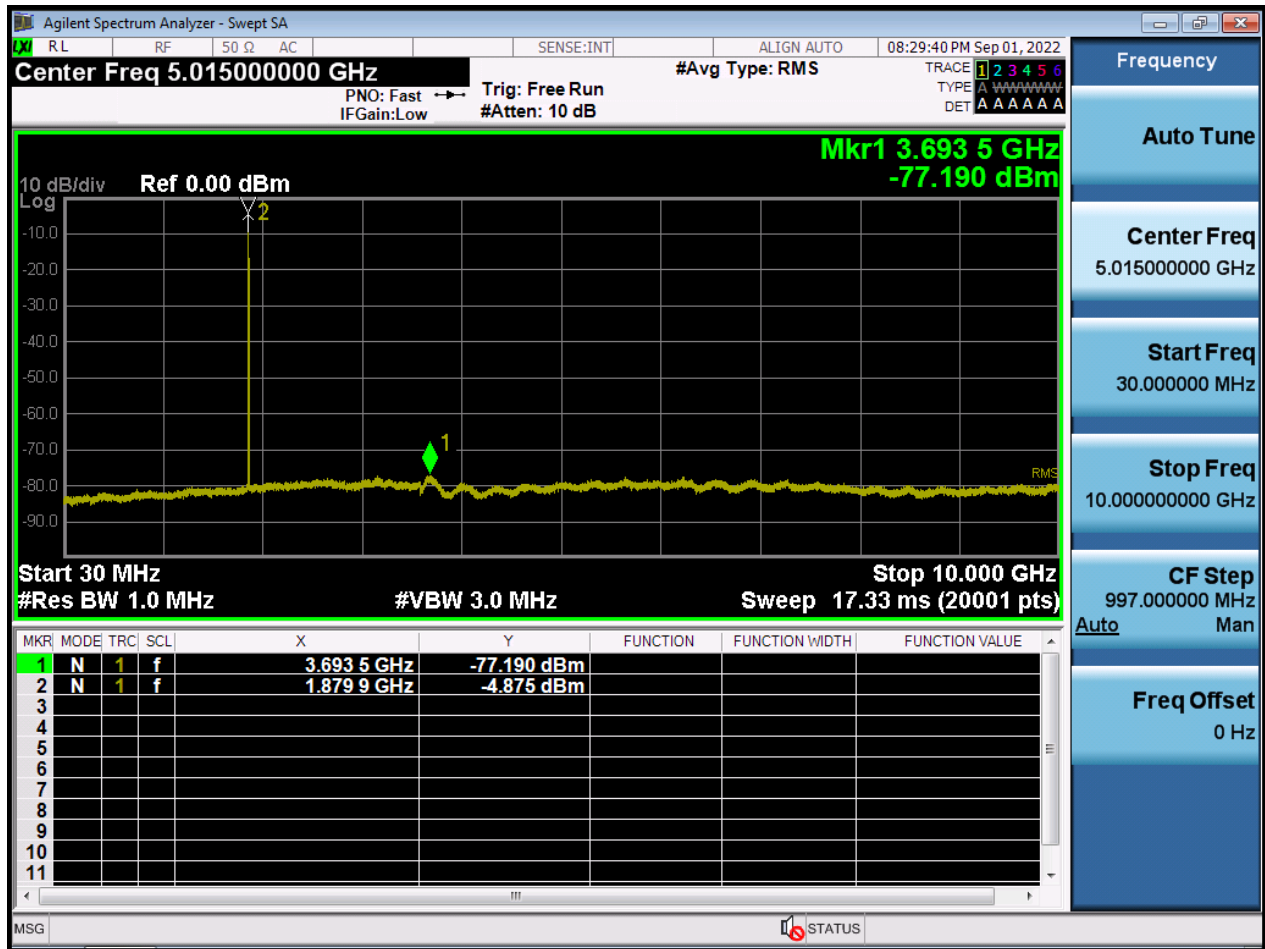


BW1.4 M\_CSE(30 M-10 G)\_Highest Channel\_QPSK\_1RB

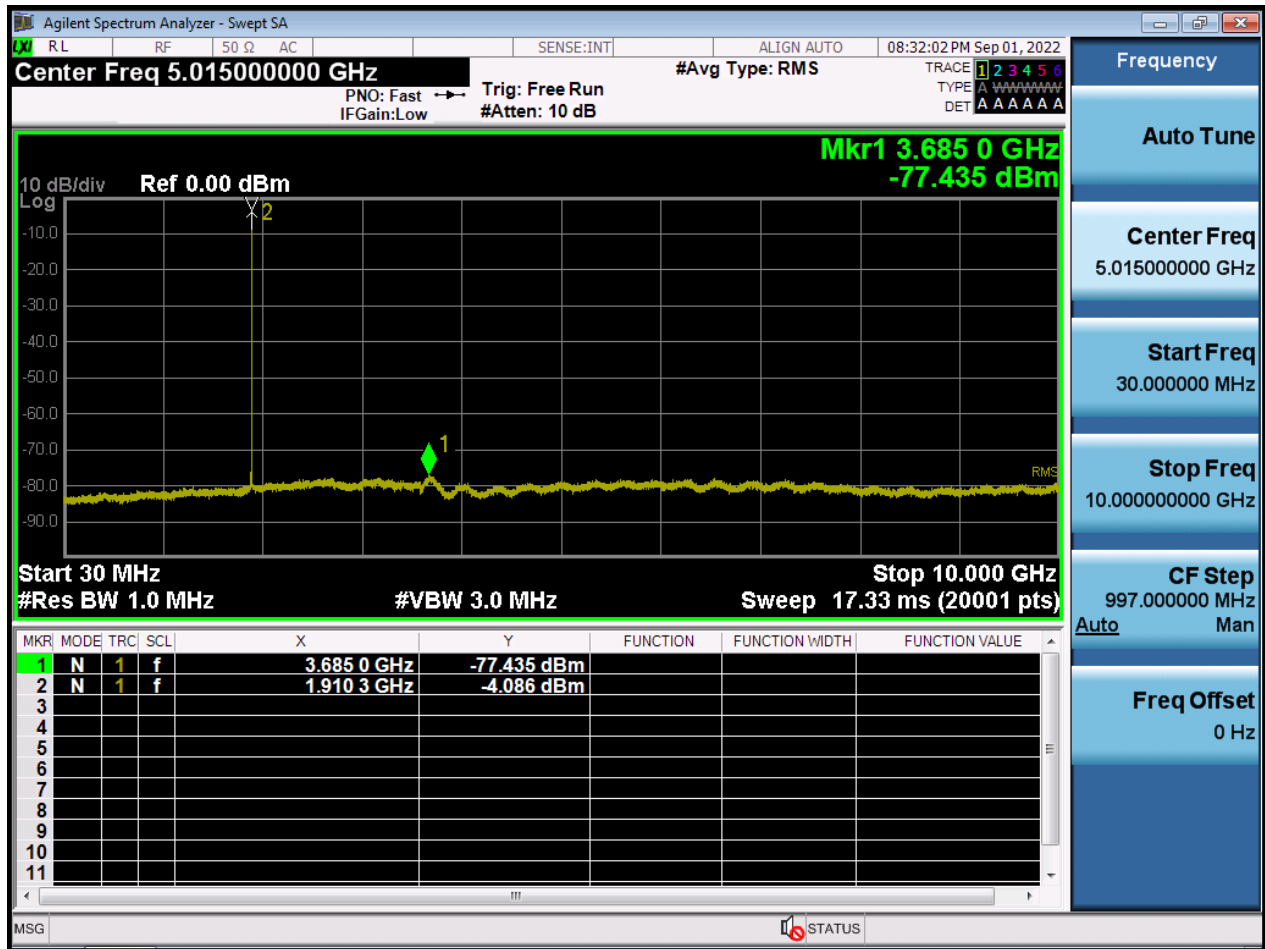


BW3 M\_CSE(30 M-10 G)\_Lowest Channel\_QPSK\_1RB

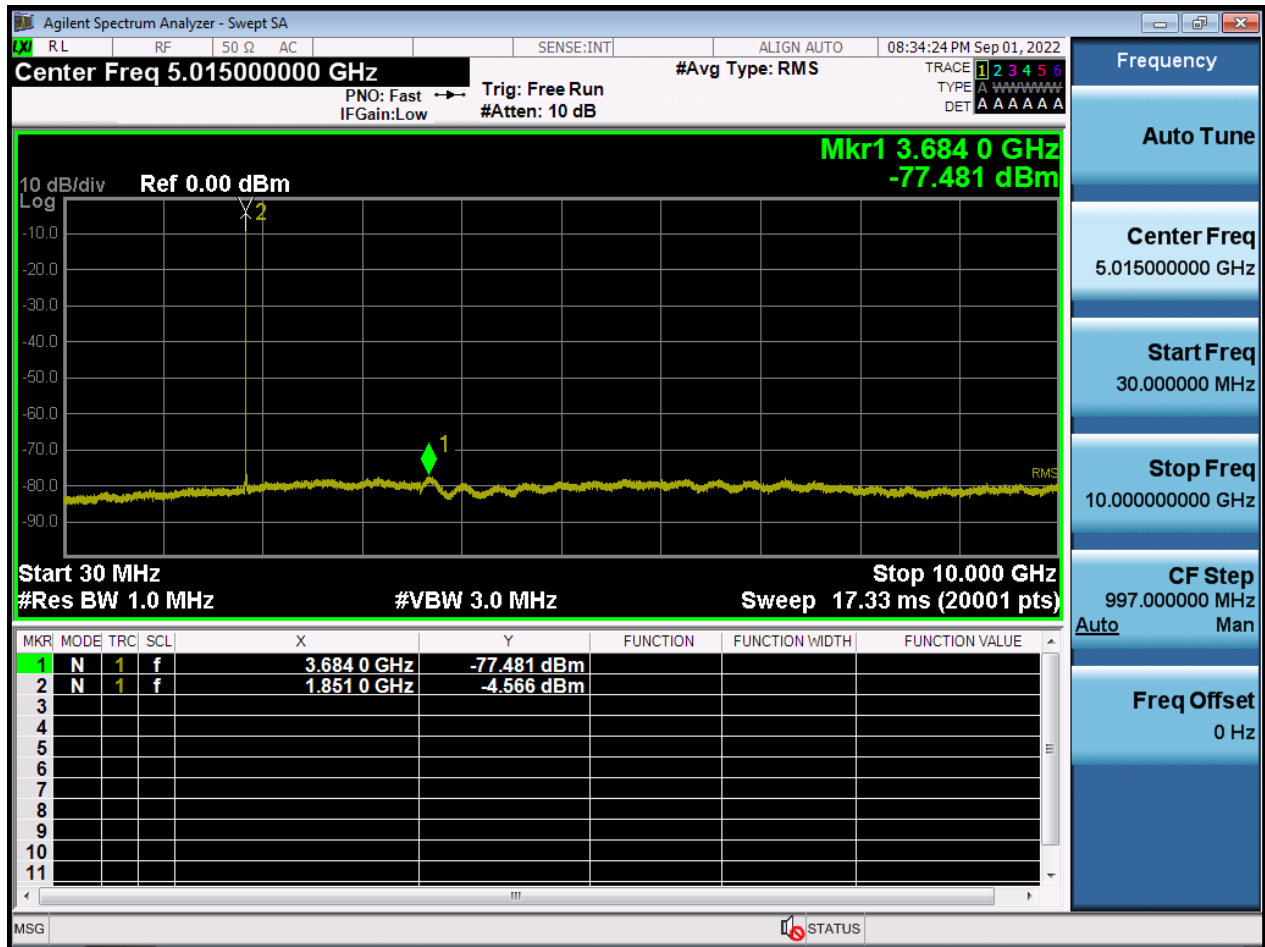


BW3 M\_CSE(30 M-10 G)\_Middle Channel\_QPSK\_1RB

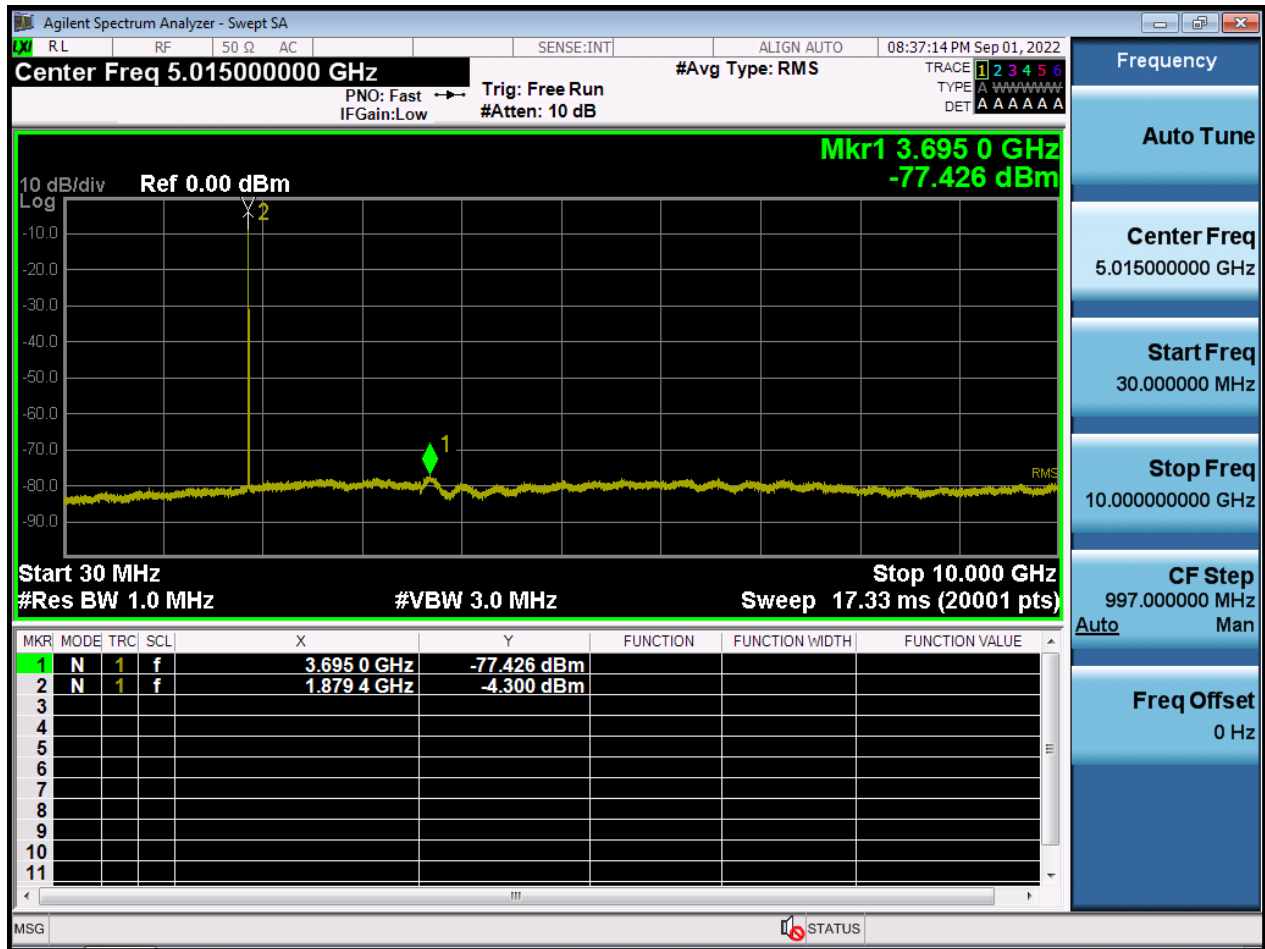


BW3 M\_CSE(30 M-10 G)\_Highest Channel\_QPSK\_1RB

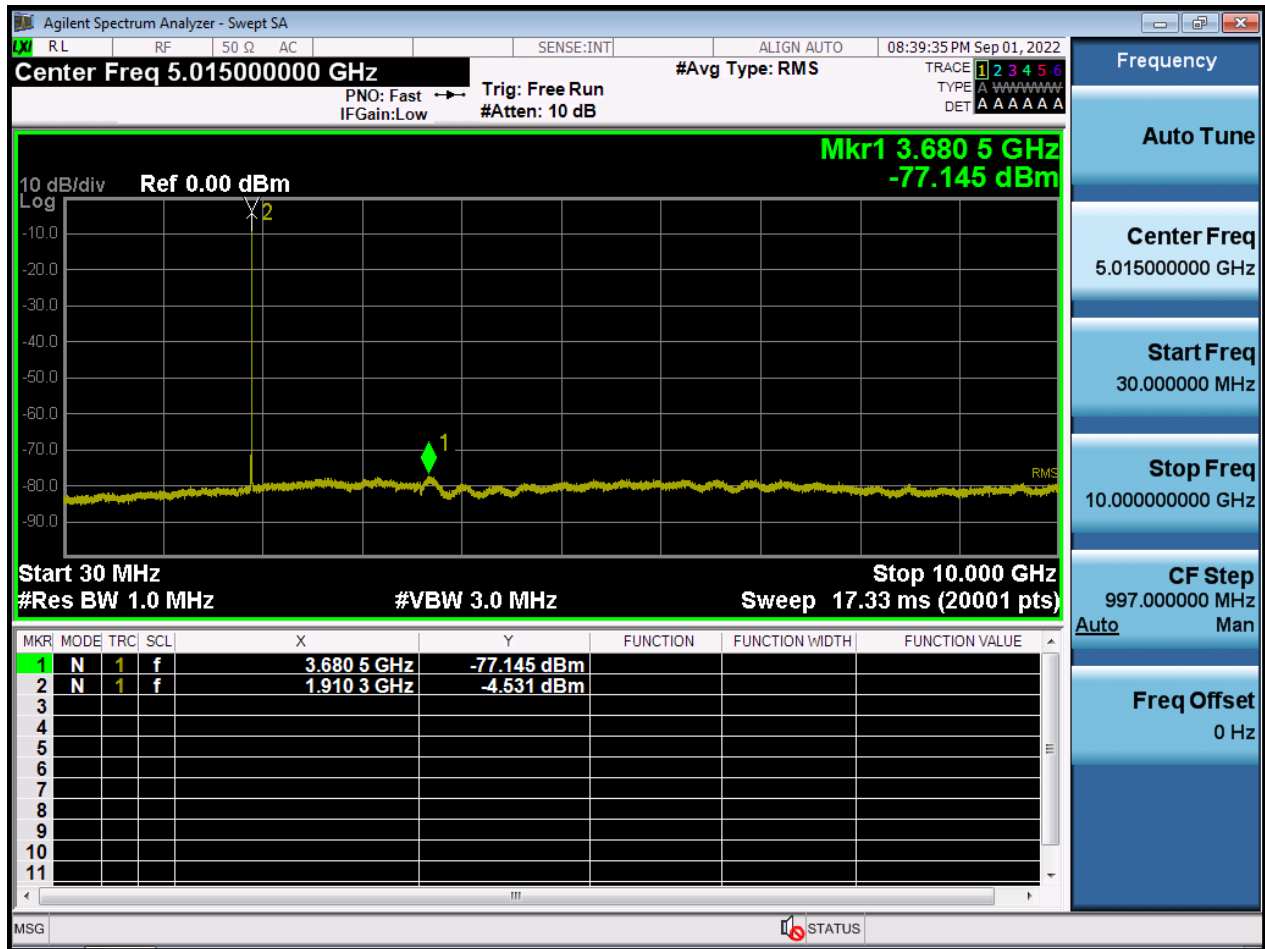


BW5 M\_CSE(30 M-10 G)\_Lowest Channel\_QPSK\_1RB

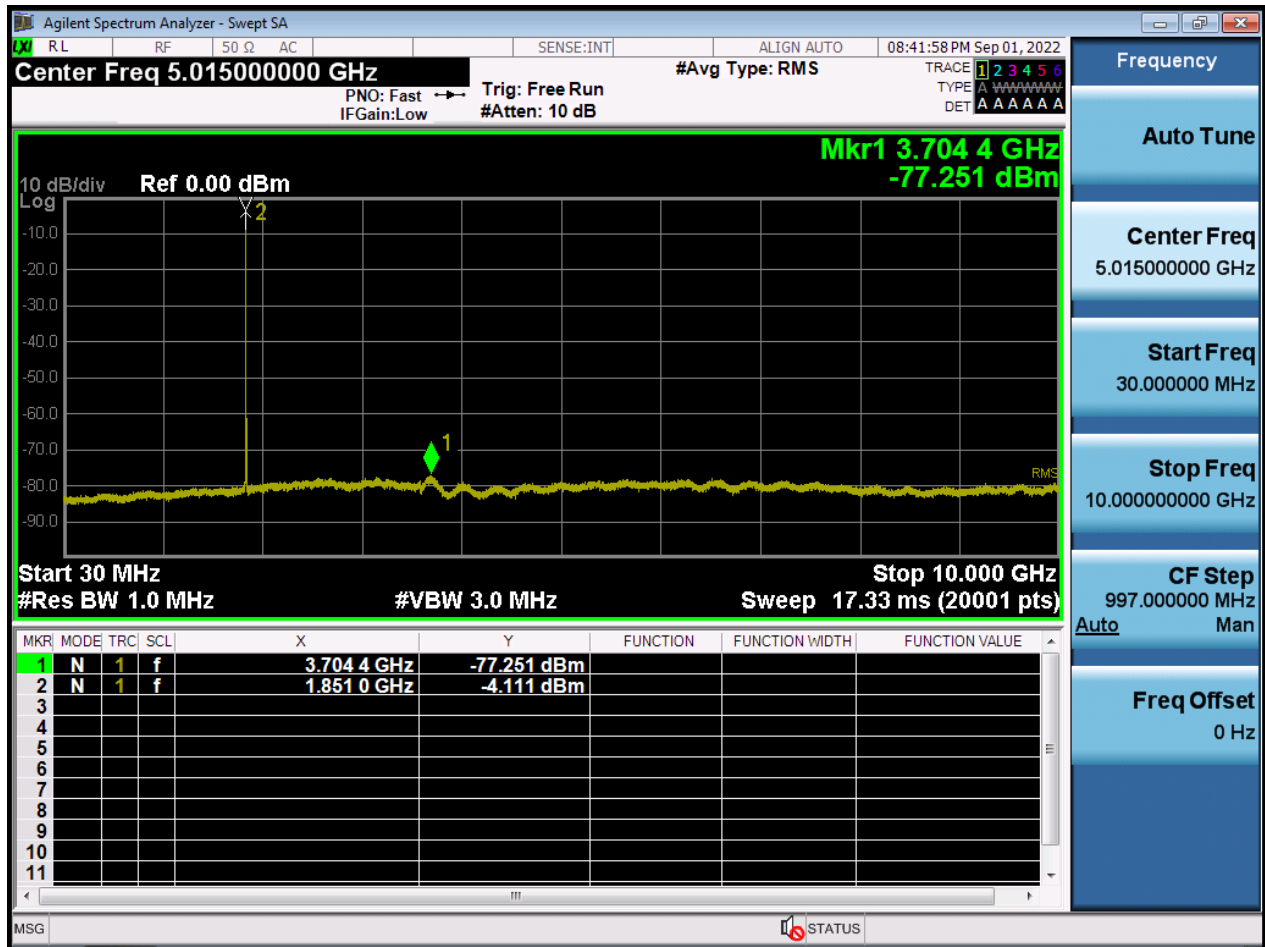

BW5 M\_CSE(30 M-10 G)\_Middle Channel\_QPSK\_1RB

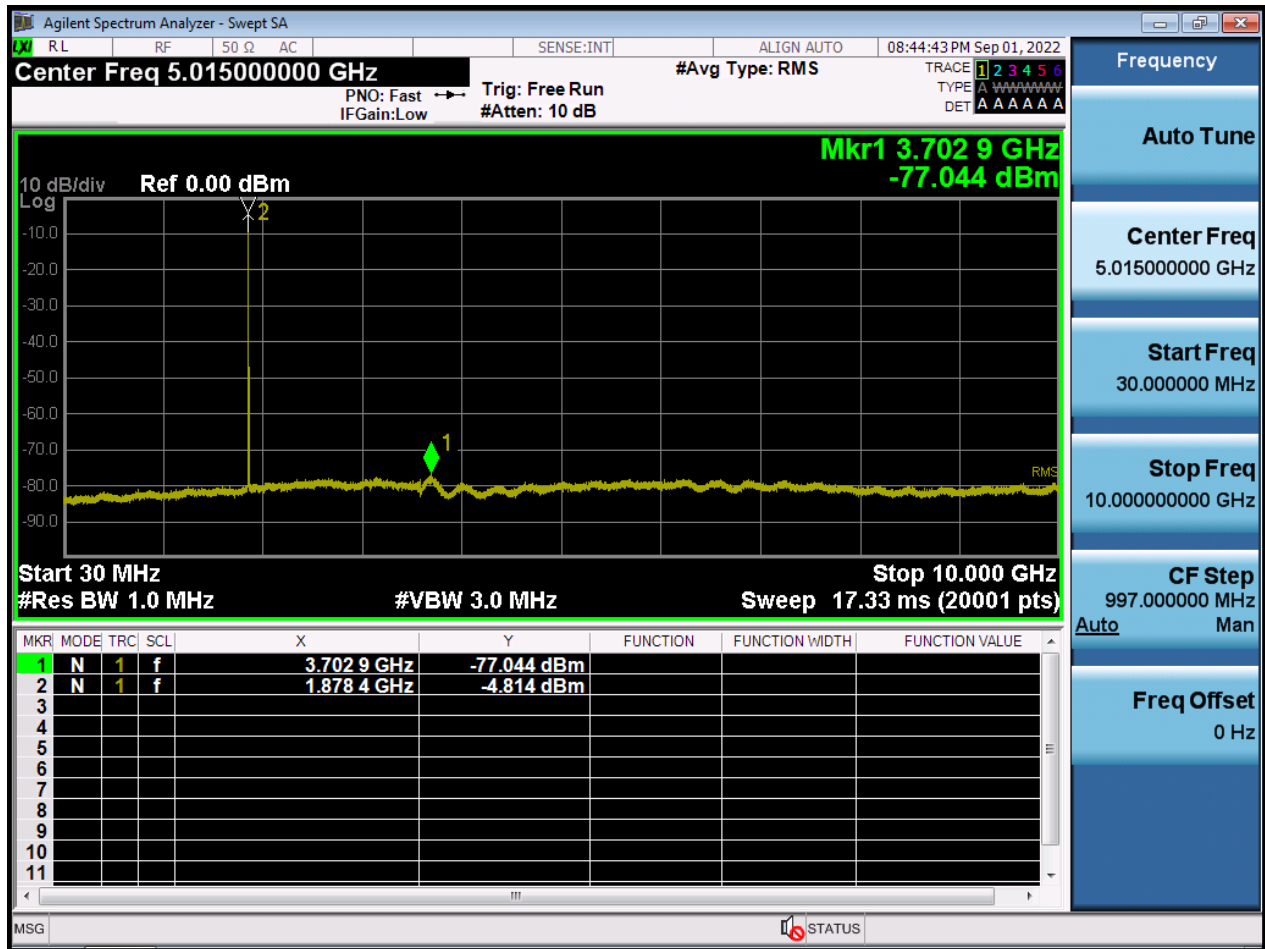

BW5 M\_CSE(30 M-10 G)\_Highest Channel\_QPSK\_1RB

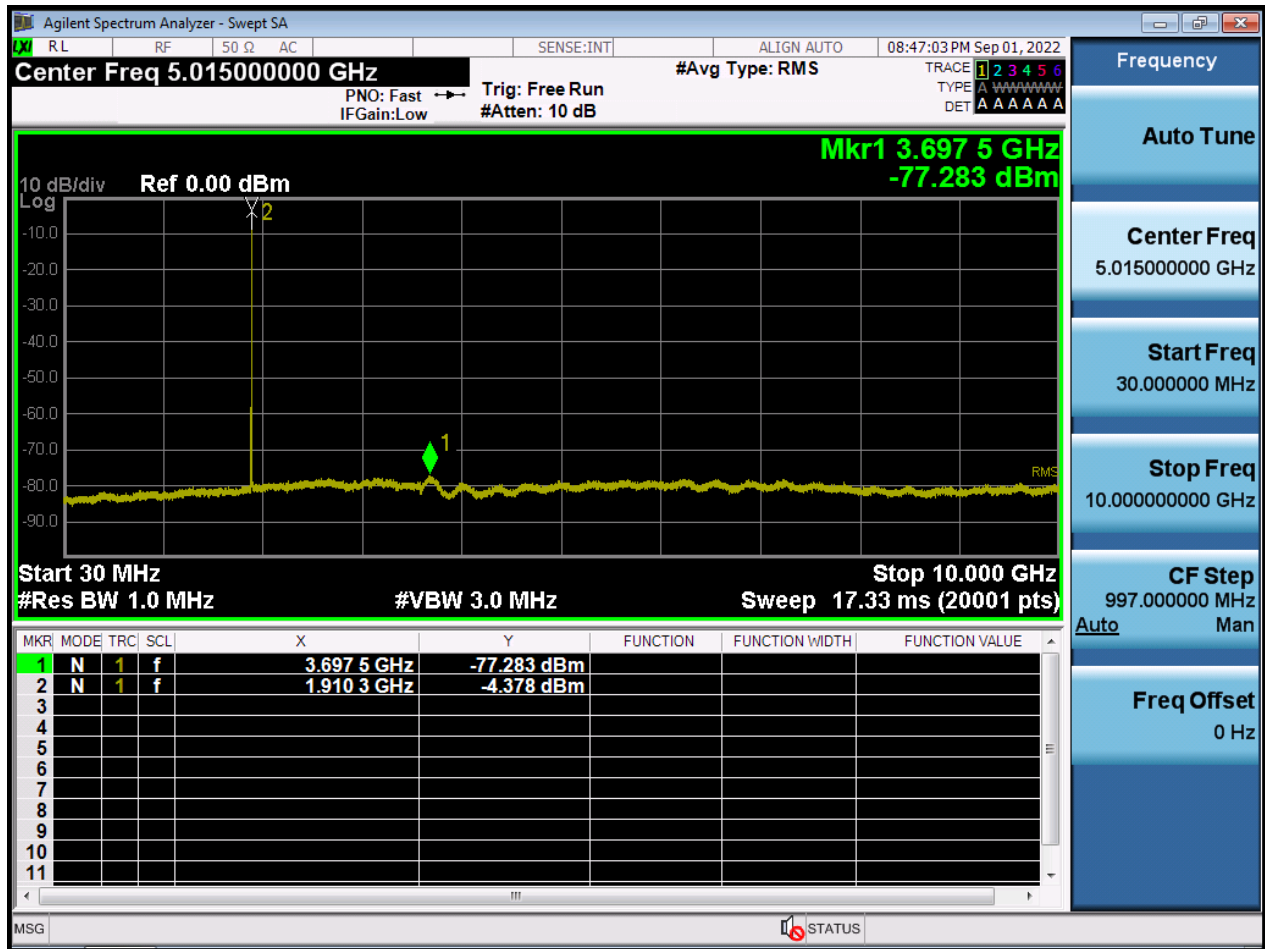



BW10 M\_CSE(30 M-10 G)\_Lowest Channel\_QPSK\_1RB

