

# FCC Sub6 REPORT

## Certification

**Applicant Name:**

SAMSUNG Electronics Co., Ltd.

**Date of Issue:**

October 21, 2022

**Address:**

129, Samsung-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**Location:**

HCT CO., LTD.,  
74, Seoicheon-ro 578beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

**Report No.:** HCT-RF-2210-FC022

**FCC ID:**

**A3LSMS911B**

**APPLICANT:**

**SAMSUNG Electronics Co., Ltd.**

Model(s): SM-S911B/DS  
Additional Model(s): SM-S911B  
EUT Type: Mobile phone  
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
FCC Rule Part(s): §27, §2

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
Sub6 n41 (10)	2501.010 – 2685.000	8M75G7D	PI/2 BPSK	0.157	21.96
		8M68G7D	QPSK	0.154	21.88
		8M69W7D	16QAM	0.119	20.76
		8M66W7D	64QAM	0.079	18.97
		8M66W7D	256QAM	0.055	17.44
Sub6 n41 (15)	2503.500 – 2682.480	13M0G7D	PI/2 BPSK	0.151	21.79
		13M0G7D	QPSK	0.147	21.66
		13M0W7D	16QAM	0.112	20.48
		12M9W7D	64QAM	0.074	18.72
		13M1W7D	256QAM	0.054	17.30
Sub6 n41 (20)	2506.020 – 2679.990	17M9G7D	PI/2 BPSK	0.157	21.96
		18M0G7D	QPSK	0.156	21.94
		17M9W7D	16QAM	0.119	20.74
		18M0W7D	64QAM	0.077	18.84
		18M0W7D	256QAM	0.055	17.44
Sub6 n41 (30)	2511.000 – 2674.980	26M9G7D	PI/2 BPSK	0.151	21.80
		26M9G7D	QPSK	0.143	21.56
		27M0W7D	16QAM	0.113	20.52
		26M9W7D	64QAM	0.077	18.84
		26M8W7D	256QAM	0.052	17.17
Sub6 n41 (40)	2516.010 – 2670.000	35M8G7D	PI/2 BPSK	0.144	21.58
		35M8G7D	QPSK	0.143	21.54
		35M8W7D	16QAM	0.107	20.30
		35M9W7D	64QAM	0.072	18.56
		35M8W7D	256QAM	0.053	17.23
Sub6 n41 (50)	2521.020 – 2664.990	45M9G7D	PI/2 BPSK	0.146	21.65
		45M8G7D	QPSK	0.145	21.60
		45M9W7D	16QAM	0.114	20.55
		45M7W7D	64QAM	0.073	18.63
		45M9W7D	256QAM	0.051	17.10
Sub6 n41 (60)	2526.000 – 2659.980	57M8G7D	PI/2 BPSK	0.145	21.62
		57M8G7D	QPSK	0.139	21.43
		57M8W7D	16QAM	0.109	20.37
		57M7W7D	64QAM	0.072	18.58
		58M2W7D	256QAM	0.049	16.93
Sub6 n41 (70)	2531.010 – 2655.000	64M4G7D	PI/2 BPSK	0.140	21.47
		64M3G7D	QPSK	0.136	21.34
		64M3W7D	16QAM	0.103	20.14
		64M5W7D	64QAM	0.068	18.31
		64M5W7D	256QAM	0.047	16.74
Sub6 n41 (80)	2536.020 – 2649.990	77M3G7D	PI/2 BPSK	0.139	21.43
		77M1G7D	QPSK	0.136	21.32
		77M0W7D	16QAM	0.107	20.31
		77M0W7D	64QAM	0.069	18.41
		77M3W7D	256QAM	0.049	16.94
Sub6 n41 (90)	2541.000 – 2644.980	87M0G7D	PI/2 BPSK	0.146	21.64
		86M7G7D	QPSK	0.144	21.58
		86M7W7D	16QAM	0.109	20.38
		86M5W7D	64QAM	0.071	18.51
		86M6W7D	256QAM	0.050	16.98
Sub6 n41 (100)	2546.010 – 2640.000	96M3G7D	PI/2 BPSK	0.142	21.51
		96M5G7D	QPSK	0.136	21.32
		96M4W7D	16QAM	0.113	20.52
		96M3W7D	64QAM	0.070	18.42
		96M4W7D	256QAM	0.050	16.95

Report No.: HCT-RF-2210-FC022

---

REVIEWED BY



---

Report prepared by : Jung Ki Lim  
Engineer of Telecommunication Testing Center

---

Report approved by : Jong Seok Lee  
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked \*.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

\* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

# Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2210-FC022	October 21, 2022	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

## Table of Contents

REVIEWED BY .....	3
1. GENERAL INFORMATION .....	6
2. INTRODUCTION .....	7
2.1. DESCRIPTION OF EUT .....	7
2.2. MEASURING INSTRUMENT CALIBRATION .....	7
2.3. TEST FACILITY .....	7
3. DESCRIPTION OF TESTS.....	8
3.1 TEST PROCEDURE .....	8
3.2 RADIATED POWER.....	9
3.3 RADIATED SPURIOUS EMISSIONS .....	10
3.4 PEAK- TO- AVERAGE RATIO.....	11
3.5 OCCUPIED BANDWIDTH. ....	13
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....	14
3.7 CHANNEL EDGE .....	15
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	17
3.9 WORST CASE(RADIATED TEST) .....	18
3.10 WORST CASE(CONDUCTED TEST) .....	19
4. LIST OF TEST EQUIPMENT .....	21
5. MEASUREMENT UNCERTAINTY .....	22
6. SUMMARY OF TEST RESULTS .....	23
7. SAMPLE CALCULATION .....	24
8. TEST DATA .....	26
8.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	26
8.2 RADIATED SPURIOUS EMISSIONS .....	37
8.3 PEAK-TO-AVERAGE RATIO.....	48
8.4 OCCUPIED BANDWIDTH .....	50
8.5 CONDUCTED SPURIOUS EMISSIONS .....	52
8.6 CHANNEL EDGE .....	54
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	57
9. TEST PLOTS.....	68
11. ANNEX A_ TEST SETUP PHOTO .....	323

# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

<b>Applicant Name:</b>	SAMSUNG Electronics Co., Ltd.
<b>Address:</b>	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
<b>FCC ID:</b>	A3LSMS911B
<b>Application Type:</b>	Certification
<b>FCC Classification:</b>	PCS Licensed Transmitter Held to Ear (PCE)
<b>FCC Rule Part(s):</b>	§27, §2
<b>EUT Type:</b>	Mobile phone
<b>Model(s):</b>	SM-S911B/DS
<b>Additional Model(s):</b>	SM-S911B
<b>SCS(kHz):</b>	30
<b>Bandwidth(MHz):</b>	10, 15, 20, 30, 40, 50, 60, 70, 80, 90, 100
<b>Waveform:</b>	CP-OFDM, DFT-S-OFDM
<b>Modulation:</b>	DFT-S-OFDM: PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM CP-OFDM: QPSK, 16QAM, 64QAM, 256QAM
<b>Tx Frequency(SCS 30kHz):</b>	2501.010 – 2685.000 : 10 MHz 2503.500 – 2682.480 : 15 MHz 2506.020 – 2679.990 : 20 MHz 2511.000 – 2674.980 : 30 MHz 2516.010 – 2670.000 : 40 MHz 2521.020 – 2664.990 : 50 MHz 2526.000 – 2659.980 : 60 MHz 2531.010 – 2655.000 : 70 MHz 2536.020 – 2649.990 : 80 MHz 2541.000 – 2644.980 : 90 MHz 2546.010 – 2640.000 : 100 MHz
<b>Date(s) of Tests:</b>	September 02, 2022~ October 14, 2022
<b>Serial number:</b>	Radiated: R3CT706PCQM Conducted: R3CT706PHYK

## **2. INTRODUCTION**

### **2.1. DESCRIPTION OF EUT**

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160 MHz), Bluetooth, BT LE, NFC, AIT, WPT.

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Channel Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12



## 3.2 RADIATED POWER

### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $>$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### 3.3 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

#### Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $> 2 \times$  span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(dBm)} = P_g_{(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dBi)}$$

Where:  $P_g$  is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(dBm)} = \text{ERP}_{(dBm)} + 2.15$$

### 3.4 PEAK- TO- AVERAGE RATIO

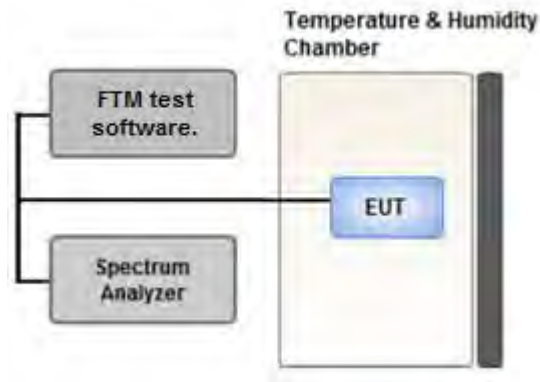

**Test setup**

#### ① CCDF Procedure for PAPR

##### **Test Settings**

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
  - for continuous transmissions, set to 1 ms,
  - or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

#### ② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as  $P_{Pk}$ .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as  $P_{Avg}$ . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

### **Test Settings(Peak Power)**


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW  $\geq 3 \times$  RBW.

1. Set the RBW  $\geq$  OBW.
2. Set VBW  $\geq 3 \times$  RBW.
3. Set span  $\geq 2 \times$  OBW.
4. Sweep time  $\geq 10 \times$  (number of points in sweep)  $\times$  (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

### **Test Settings(Average Power)**

1. Set span to  $2 \times$  to  $3 \times$  the OBW.
2. Set RBW  $\geq$  OBW.
3. Set VBW  $\geq 3 \times$  RBW.
4. Set number of measurement points in sweep  $\geq 2 \times$  span / RBW.
5. Sweep time:  
Set  $\geq [10 \times$  (number of points in sweep)  $\times$  (transmission period)] for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add  $[10 \log (1/\text{duty cycle})]$  to the measured maximum power level to compute the average power during continuous transmission. For example, add  $[10 \log (1/0.25)] = 6 \text{ dB}$  if the duty cycle is a constant 25 %.

### 3.5 OCCUPIED BANDWIDTH.

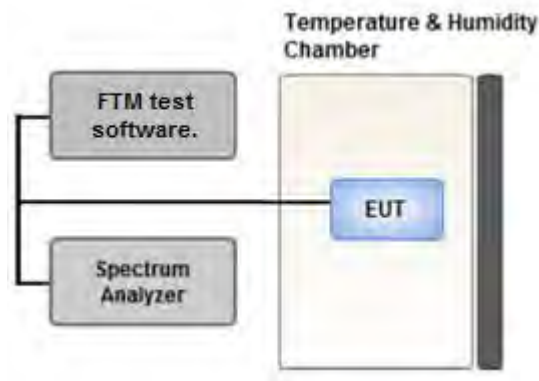

#### Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

### 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

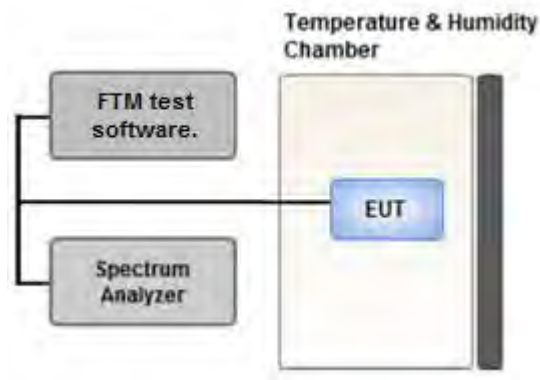

Test setup


#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 x Span / RBW

### 3.7 CHANNEL EDGE

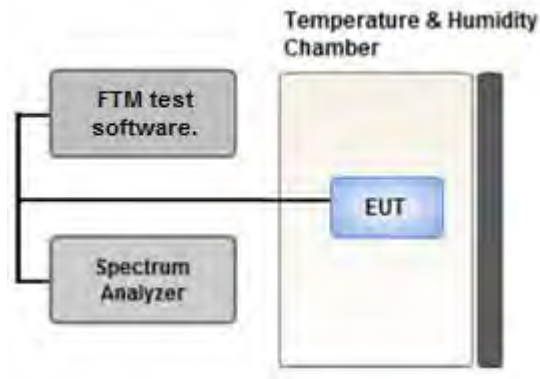

**Test setup**

#### **Test Overview**

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum power and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### **Test Settings**

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. Within 1 MHz of the channel edge the RBW should be 2 % of EBW, then 1 MHz after that.
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


**Test Notes**

1. The attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,
2.  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge.
3.  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge.
4. The attenuation factor shall not be less that  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz.
5.  $55 + 10 \log (P)$  dB at or below 2490.5 MHz.
6. X is the greater of 6MHz or the actual emission bandwidth
7. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer

Where Margin < 1 dB the emission level is either corrected by  $10 \log(1 \text{ MHz/ RB})$  or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.



### 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

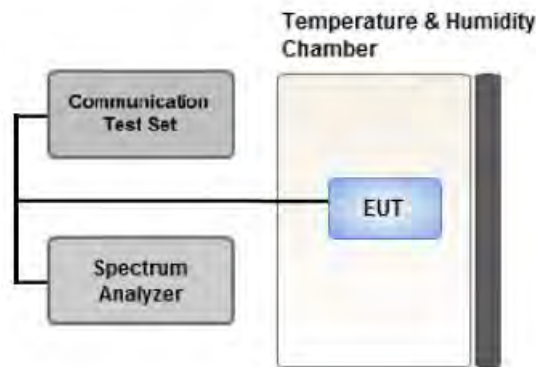

**Test setup**

#### **Test Overview**

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

#### **Test Settings**

1. The carrier frequency of the transmitter is measured at room temperature

(20 °C to provide a reference).

2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

**3.9 WORST CASE(RADIATED TEST)**

- Waveform : All Waveform of operation were investigated and the worst case configuration results are reported.  
(Worst case: DFT-S-OFDM)
- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.  
Mode: SA(PC3), NSA(PC3)  
Worst case: NSA(PC3)  
Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)  
Worst case : Stand alone
- We were performed the RSE test in condition of co-location.  
Mode : Stand alone, Simultaneous transmission scenarios  
Worst case : Stand alone
- Radiated Spurious emissions are measured while operating in EN-DC mode with Sub 6 NR carrier as well as an LTE carrier (anchor).  
All EN-DC mode of operation were investigated and the worst case configuration results are reported.  
(Worst case: 12A-n41A (10 MHz))
- All RB sizes, offsets of operation were investigated and the worst case configuration results are reported.  
Please refer to the table below.
- SM-S911B/DS & additional models were tested and the worst case results are reported.  
(Worst case : SM-S911B/DS)

[ Worst case ]

Test Description	Modulation	RB size	RB offset	Axis
<b>Effective Isotropic Radiated Power</b>	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	See Section 8.1		Z
<b>Radiated Spurious and Harmonic Emissions</b>	PI/2 BPSK	See Section 8.2		X

### **3.10 WORST CASE(CONDUCTED TEST)**

- Waveform : All Waveform of operation were investigated and the worst case configuration results are reported.  
(Worst case: DFT-S-OFDM)
- Modulation : All Modulation of operation were investigated and the worst case configuration results are reported.  
(Worst case: PI/2 BPSK)
- All modes of operation were investigated and the worst case configuration results are reported.  
Mode: SA(PC3), NSA(PC3)  
Worst case: NSA(PC3)
- All RB sizes, offsets of operation were investigated and the worst case configuration results are reported.  
Please refer to the table below.
- SM-S911B/DS & additional models were tested and the worst case results are reported.  
(Worst case : SM-S911B/DS)

[ Worst case ]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset		
Occupied Bandwidth, Peak-To-Average Ratio	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	10, 15, 20, 30, 40, 50, 60, 70, 80, 90, 100	Mid	Full RB	0		
Channel Edge	PI/2 BPSK	10	Low	1	0		
			High	1	23		
		15	Low	1	0		
			High	1	37		
		20	Low	1	0		
			High	1	50		
		30	Low	1	0		
			High	1	77		
		40	Low	1	0		
			High	1	105		
		50	Low	1	0		
			High	1	132		
		60	Low	1	0		
			High	1	161		
		70	Low	1	0		
			High	1	188		
		80	Low	1	0		
			High	1	216		
		90	Low	1	0		
			High	1	244		
		100	Low	1	0		
			High	1	272		
				10, 15, 20, 30, 40, 50, 60, 70, 80, 90, 100	Low, Mid High	Full RB	0
		Spurious and Harmonic Emissions at Antenna Terminal	PI/2 BPSK	10, 15, 20, 30, 40, 50, 60, 70, 80, 90, 100	Low, Mid, High	1	1

#### 4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacture	Serial No.	Due to Calibration	Calibration Interval
Precision Dipole Antenna	UHAP	Schwarzbeck	01273	03/27/2024	Biennial
Precision Dipole Antenna	UHAP	Schwarzbeck	01274	03/27/2024	Biennial
Horn Antenna(1~18 GHz)	BBHA 9120D	Schwarzbeck	02289	03/21/2024	Biennial
Horn Antenna(1~18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1299	05/04/2023	Biennial
Horn Antenna(15~40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Horn Antenna(15~40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	04/12/2023	Biennial
Loop Antenna(9 kHz~30 MHz)	FMZB1513	Rohde & Schwarz	1513-175	06/04/2023	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/03/2023	Biennial
Hybrid Antenna	VULB9160	Schwarzbeck	760	02/22/2023	Biennial
High Pass Filter	WHKX10-900-1000-15000-40SS	Wainwright Instruments	15	05/18/2023	Annual
High Pass Filter	WHKX10-2700-3000-18000-40SS	Wainwright Instruments	145	05/18/2023	Annual
High Pass Filter	WHNX6-4740-6000-26500-40CC	Wainwright Instruments	11	05/18/2023	Annual
LOW NOISE AMP (100 MHz ~ 18 GHz)	CBLU1183540B-01	CERNEC	26822	05/18/2023	Annual
Power Amplifier	CBL18265035	CERNEC	22966	12/02/2022	Annual
Power Amplifier	CBL26405040	CERNEC	25956	03/11/2023	Annual
DC Power Supply	E3632A	Hewlett Packard	MY40004427	09/05/2023	Annual
Power Splitter(DC~26.5 GHz)	11667B	Hewlett Packard	11275	03/11/2023	Annual
Chamber	SU-642	ESPEC	93008124	03/04/2023	Annual
Signal Analyzer(10 Hz~26.5 GHz)	N9020A	Agilent	MY51110063	04/19/2023	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	05/18/2023	Annual
Spectrum Analyzer(10 Hz~40 GHz)	FSV40	REOHDE & SCHWARZ	101436	02/25/2023	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2023	Annual
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262287700	05/19/2023	Annual
Wideband Radio Communication Tester	MT8000A	Anritsu Corp.	6262302511	05/18/2023	Annual
SIGNAL GENERATOR (100 kHz~40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2023	Annual
Signal Analyzer(5 Hz~40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/30/2023	Annual
4-Way Divider	ZC4PD-K1844+	Mini-Circuits	942907	09/27/2023	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

**Note:**

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	2.00 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (9 kHz ~ 30 MHz)	4.40 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (30 MHz ~ 1 GHz)	5.74 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (1 GHz ~ 18 GHz)	5.51 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (18 GHz ~ 40 GHz)	5.92 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (Above 40 GHz)	5.48 (Confidence level about 95 %, $k=2$ )

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(m)(4)	<ul style="list-style-type: none"> <li>■ <math>&lt; 40 + 10\log_{10} (P[\text{Watts}] )</math> at Channel edges</li> <li>■ <math>&lt; 43 + 10\log_{10} (P[\text{Watts}] )</math> between 5 and X MHz from Channel edges</li> <li>■ <math>&lt; 55 + 10\log_{10} (P[\text{Watts}] )</math> beyond X MHz beyond from Channel edges</li> <li>■ <math>&lt; 43 + 10 \log (P)</math> dB on all frequencies between 2490.5 MHz and 2496 MHz</li> </ul>	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§2.1055, §27.54	Emission must remain in band	PASS

Note:

1. See SAR Report
2. All conducted tests were tested using 5G Wireless Tester.

### 6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§27.50(h)(2)	$< 2$ Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(m)(4)	$< 55 + 10\log_{10} (P[\text{Watts}] )$	PASS

Note:

1. Radiated tests were tested using 5G Wireless Tester.

## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
518598	2593.0	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.



7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

## 8. TEST DATA

### 8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
2501.010	Sub6 41/ 10 MHz [30 kHz]	PI/2 BPSK	-22.51	14.13	10.30	2.47	V	< 2.00	0.157	21.96	1	12
		QPSK	-22.59	14.05	10.30	2.47	V		0.154	21.88		
		16-QAM	-23.71	12.93	10.30	2.47	V		0.119	20.76		
		64-QAM	-25.50	11.14	10.30	2.47	V		0.079	18.97		
		256-QAM	-27.03	9.61	10.30	2.47	V		0.055	17.44		
2592.990		PI/2 BPSK	-24.00	12.30	10.05	2.50	V		0.097	19.85	1	1
		QPSK	-24.11	12.19	10.05	2.50	V		0.094	19.74		
		16-QAM	-25.12	11.18	10.05	2.50	V		0.075	18.73		
		64-QAM	-26.99	9.31	10.05	2.50	V		0.049	16.86		
		256-QAM	-28.57	7.73	10.05	2.50	V		0.034	15.28		
2685.000	PI/2 BPSK	-23.53	13.93	10.10	2.58	V	0.140	21.45	1	12		
	QPSK	-23.69	13.77	10.10	2.58	V	0.135	21.29				
	16-QAM	-24.70	12.76	10.10	2.58	V	0.107	20.28				
	64-QAM	-26.71	10.75	10.10	2.58	V	0.067	18.27				
	256-QAM	-28.08	9.38	10.10	2.58	V	0.049	16.90				

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W dBm	Size	Offset
2503.500	Sub6 41/ 15 MHz [30 kHz]	PI/2 BPSK	-22.71	13.92	10.30	2.48	V	< 2.00	0.149	21.74	1	19
		QPSK	-22.79	13.84	10.30	2.48	V		0.147	21.66		
		16-QAM	-23.97	12.66	10.30	2.48	V		0.112	20.48		
		64-QAM	-25.79	10.84	10.30	2.48	V		0.074	18.66		
		256-QAM	-27.15	9.48	10.30	2.48	V		0.054	17.30		
2592.990		PI/2 BPSK	-23.64	12.66	10.05	2.50	V		0.105	20.21	1	1
		QPSK	-23.79	12.51	10.05	2.50	V		0.101	20.06		
		16-QAM	-24.84	11.46	10.05	2.50	V		0.080	19.01		
		64-QAM	-26.41	9.89	10.05	2.50	V		0.055	17.44		
		256-QAM	-28.20	8.10	10.05	2.50	V		0.037	15.65		
2682.480		PI/2 BPSK	-23.44	14.27	10.10	2.58	V		0.151	21.79	1	19
		QPSK	-23.67	14.04	10.10	2.58	V		0.143	21.56		
		16-QAM	-24.79	12.92	10.10	2.58	V		0.111	20.44		
		64-QAM	-26.51	11.20	10.10	2.58	V		0.074	18.72		
		256-QAM	-27.99	9.72	10.10	2.58	V		0.053	17.24		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		RB	
									W	dBm	Size	Offset
2506.020	Sub6 41/ 20 MHz [30 kHz]	PI/2 BPSK	-22.49	14.14	10.30	2.48	V	< 2.00	0.157	21.96	1	1
		QPSK	-22.51	14.12	10.30	2.48	V		0.156	21.94		
		16-QAM	-23.74	12.89	10.30	2.48	V		0.118	20.71		
		64-QAM	-25.69	10.94	10.30	2.48	V		0.075	18.76		
		256-QAM	-27.16	9.47	10.30	2.48	V		0.054	17.29		
2592.990		PI/2 BPSK	-23.93	12.37	10.05	2.50	V		0.098	19.92	1	1
		QPSK	-24.00	12.30	10.05	2.50	V		0.097	19.85		
		16-QAM	-25.00	11.30	10.05	2.50	V		0.077	18.85		
		64-QAM	-26.93	9.37	10.05	2.50	V		0.049	16.92		
		256-QAM	-28.41	7.89	10.05	2.50	V		0.035	15.44		
2679.990		PI/2 BPSK	-23.46	14.25	10.10	2.58	V		0.150	21.77	1	1
		QPSK	-23.50	14.21	10.10	2.58	V		0.149	21.73		
		16-QAM	-24.49	13.22	10.10	2.58	V		0.119	20.74		
		64-QAM	-26.39	11.32	10.10	2.58	V		0.077	18.84		
		256-QAM	-27.79	9.92	10.10	2.58	V		0.055	17.44		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
2511.000	Sub6 41/ 30 MHz [30 kHz]	PI/2 BPSK	-22.62	14.00	10.30	2.50	V	< 2.00	0.151	21.80	1	1
		QPSK	-22.91	13.71	10.30	2.50	V		0.142	21.51		
		16-QAM	-24.02	12.60	10.30	2.50	V		0.110	20.40		
		64-QAM	-25.79	10.83	10.30	2.50	V		0.073	18.63		
		256-QAM	-27.51	9.11	10.30	2.50	V		0.049	16.91		
2592.990		PI/2 BPSK	-23.69	12.61	10.05	2.50	V		0.104	20.16	1	1
		QPSK	-23.73	12.57	10.05	2.50	V		0.103	20.12		
		16-QAM	-24.82	11.48	10.05	2.50	V		0.080	19.03		
		64-QAM	-26.79	9.51	10.05	2.50	V		0.051	17.06		
		256-QAM	-28.29	8.01	10.05	2.50	V		0.036	15.56		
2674.980	PI/2 BPSK	-23.31	14.10	10.10	2.58	V	0.145	21.62	1	1		
	QPSK	-23.37	14.04	10.10	2.58	V	0.143	21.56				
	16-QAM	-24.41	13.00	10.10	2.58	V	0.113	20.52				
	64-QAM	-26.09	11.32	10.10	2.58	V	0.077	18.84				
	256-QAM	-27.76	9.65	10.10	2.58	V	0.052	17.17				

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W dBm	Size	Offset
2516.010	Sub6 41/ 40 MHz [30 kHz]	PI/2 BPSK	-22.71	13.78	10.30	2.51	V	< 2.00	0.144	21.57	1	1
		QPSK	-22.89	13.60	10.30	2.51	V		0.138	21.39		
		16-QAM	-24.06	12.43	10.30	2.51	V		0.105	20.22		
		64-QAM	-26.00	10.49	10.30	2.51	V		0.067	18.28		
		256-QAM	-27.52	8.97	10.30	2.51	V		0.047	16.76		
2592.990		PI/2 BPSK	-24.06	12.24	10.05	2.50	V		0.095	19.79	1	53
		QPSK	-24.29	12.01	10.05	2.50	V		0.090	19.56		
		16-QAM	-25.30	11.00	10.05	2.50	V		0.072	18.55		
		64-QAM	-27.21	9.09	10.05	2.50	V		0.046	16.64		
		256-QAM	-28.85	7.45	10.05	2.50	V		0.032	15.00		
2670.000	PI/2 BPSK	-23.06	14.06	10.10	2.58	V	0.144	21.58	1	1		
	QPSK	-23.10	14.02	10.10	2.58	V	0.143	21.54				
	16-QAM	-24.34	12.78	10.10	2.58	V	0.107	20.30				
	64-QAM	-26.08	11.04	10.10	2.58	V	0.072	18.56				
	256-QAM	-27.41	9.71	10.10	2.58	V	0.053	17.23				

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
2521.020	Sub6 41/ 50 MHz [30 kHz]	PI/2 BPSK	-22.49	14.18	10.00	2.53	V	< 2.00	0.146	21.65	1	1
		QPSK	-22.54	14.13	10.00	2.53	V		0.145	21.60		
		16-QAM	-23.59	13.08	10.00	2.53	V		0.114	20.55		
		64-QAM	-25.51	11.16	10.00	2.53	V		0.073	18.63		
		256-QAM	-27.04	9.63	10.00	2.53	V		0.051	17.10		
2592.990		PI/2 BPSK	-23.73	12.57	10.05	2.50	V		0.103	20.12	1	1
		QPSK	-23.83	12.47	10.05	2.50	V		0.101	20.02		
		16-QAM	-24.83	11.47	10.05	2.50	V		0.080	19.02		
		64-QAM	-26.71	9.59	10.05	2.50	V		0.052	17.14		
		256-QAM	-28.31	7.99	10.05	2.50	V		0.036	15.54		
2664.990	PI/2 BPSK	-23.01	14.08	10.10	2.60	V	0.144	21.58	1	66		
	QPSK	-23.16	13.93	10.10	2.60	V	0.139	21.43				
	16-QAM	-24.31	12.78	10.10	2.60	V	0.107	20.28				
	64-QAM	-26.11	10.98	10.10	2.60	V	0.071	18.48				
	256-QAM	-27.61	9.48	10.10	2.60	V	0.050	16.98				

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W dBm	Size	Offset
2526.000	Sub6 41/ 60 MHz [30 kHz]	PI/2 BPSK	-22.41	13.85	10.30	2.53	V	< 2.00	0.145	21.62	1	1
		QPSK	-22.60	13.66	10.30	2.53	V		0.139	21.43		
		16-QAM	-23.66	12.60	10.30	2.53	V		0.109	20.37		
		64-QAM	-25.56	10.70	10.30	2.53	V		0.070	18.47		
		256-QAM	-27.10	9.16	10.30	2.53	V		0.049	16.93		
2592.990		PI/2 BPSK	-23.36	12.94	10.05	2.50	V		0.112	20.49	1	1
		QPSK	-23.41	12.89	10.05	2.50	V		0.111	20.44		
		16-QAM	-24.52	11.78	10.05	2.50	V		0.086	19.33		
		64-QAM	-26.29	10.01	10.05	2.50	V		0.057	17.56		
		256-QAM	-27.76	8.54	10.05	2.50	V		0.041	16.09		
2659.980	PI/2 BPSK	-22.93	13.92	10.10	2.61	V	0.138	21.41	1	81		
	QPSK	-23.03	13.82	10.10	2.61	V	0.135	21.31				
	16-QAM	-23.99	12.86	10.10	2.61	V	0.108	20.35				
	64-QAM	-25.76	11.09	10.10	2.61	V	0.072	18.58				
	256-QAM	-27.52	9.33	10.10	2.61	V	0.048	16.82				



Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W dBm	Size	Offset
2531.010	Sub6 41/ 70 MHz [30 kHz]	PI/2 BPSK	-22.43	13.69	10.30	2.52	V	< 2.00	0.140	21.47	1	1
		QPSK	-22.56	13.56	10.30	2.52	V		0.136	21.34		
		16-QAM	-23.76	12.36	10.30	2.52	V		0.103	20.14		
		64-QAM	-25.59	10.53	10.30	2.52	V		0.068	18.31		
		256-QAM	-27.16	8.96	10.30	2.52	V		0.047	16.74		
2592.990		PI/2 BPSK	-23.61	12.69	10.05	2.50	V		0.106	20.24	1	1
		QPSK	-23.83	12.47	10.05	2.50	V		0.101	20.02		
		16-QAM	-24.84	11.46	10.05	2.50	V		0.080	19.01		
		64-QAM	-26.66	9.64	10.05	2.50	V		0.052	17.19		
		256-QAM	-28.13	8.17	10.05	2.50	V		0.037	15.72		
2655.000	PI/2 BPSK	-23.15	13.61	10.10	2.63	V	0.128	21.08	1	94		
	QPSK	-23.37	13.39	10.10	2.63	V	0.122	20.86				
	16-QAM	-24.41	12.35	10.10	2.63	V	0.096	19.82				
	64-QAM	-26.24	10.52	10.10	2.63	V	0.063	17.99				
	256-QAM	-27.75	9.01	10.10	2.63	V	0.045	16.48				

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W dBm	Size	Offset
2536.020	Sub6 41/ 80 MHz [30 kHz]	PI/2 BPSK	-22.59	13.65	10.30	2.52	V	< 2.00	0.139	21.43	1	1
		QPSK	-22.70	13.54	10.30	2.52	V		0.136	21.32		
		16-QAM	-23.71	12.53	10.30	2.52	V		0.107	20.31		
		64-QAM	-25.61	10.63	10.30	2.52	V		0.069	18.41		
		256-QAM	-27.08	9.16	10.30	2.52	V		0.049	16.94		
2592.990		PI/2 BPSK	-23.61	12.69	10.05	2.50	V		0.106	20.24	1	1
		QPSK	-23.75	12.55	10.05	2.50	V		0.102	20.10		
		16-QAM	-24.82	11.48	10.05	2.50	V		0.080	19.03		
		64-QAM	-26.60	9.70	10.05	2.50	V		0.053	17.25		
		256-QAM	-28.19	8.11	10.05	2.50	V		0.037	15.66		
2649.990	PI/2 BPSK	-23.16	13.51	10.10	2.65	V	0.125	20.96	1	108		
	QPSK	-23.24	13.43	10.10	2.65	V	0.123	20.88				
	16-QAM	-24.36	12.31	10.10	2.65	V	0.095	19.76				
	64-QAM	-26.14	10.53	10.10	2.65	V	0.063	17.98				
	256-QAM	-27.76	8.91	10.10	2.65	V	0.043	16.36				

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W dBm	Size	Offset
2541.000	Sub6 41/ 90 MHz [30 kHz]	PI/2 BPSK	-22.50	13.86	10.30	2.52	V	< 2.00	0.146	21.64	1	1
		QPSK	-22.56	13.80	10.30	2.52	V		0.144	21.58		
		16-QAM	-23.76	12.60	10.30	2.52	V		0.109	20.38		
		64-QAM	-25.63	10.73	10.30	2.52	V		0.071	18.51		
		256-QAM	-27.16	9.20	10.30	2.52	V		0.050	16.98		
2592.990		PI/2 BPSK	-23.19	13.11	10.05	2.50	V		0.116	20.66	1	1
		QPSK	-23.31	12.99	10.05	2.50	V		0.113	20.54		
		16-QAM	-24.41	11.89	10.05	2.50	V		0.088	19.44		
		64-QAM	-26.09	10.21	10.05	2.50	V		0.060	17.76		
		256-QAM	-27.61	8.69	10.05	2.50	V		0.042	16.24		
2644.980	PI/2 BPSK	-23.13	13.68	10.00	2.66	V	0.127	21.02	1	122		
	QPSK	-23.20	13.61	10.00	2.66	V	0.125	20.95				
	16-QAM	-24.27	12.54	10.00	2.66	V	0.097	19.88				
	64-QAM	-26.06	10.75	10.00	2.66	V	0.065	18.09				
	256-QAM	-27.67	9.14	10.00	2.66	V	0.045	16.48				

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W dBm	Size	Offset
2546.010	Sub6 41/ 100 MHz [30 kHz]	PI/2 BPSK	-22.57	13.80	10.25	2.54	V	< 2.00	0.142	21.51	1	1
		QPSK	-22.76	13.61	10.25	2.54	V		0.136	21.32		
		16-QAM	-23.56	12.81	10.25	2.54	V		0.113	20.52		
		64-QAM	-25.66	10.71	10.25	2.54	V		0.070	18.42		
		256-QAM	-27.13	9.24	10.25	2.54	V		0.050	16.95		
2592.990		PI/2 BPSK	-23.43	12.87	10.05	2.50	V		0.110	20.42	1	1
		QPSK	-23.44	12.86	10.05	2.50	V		0.110	20.41		
		16-QAM	-24.71	11.59	10.05	2.50	V		0.082	19.14		
		64-QAM	-26.51	9.79	10.05	2.50	V		0.054	17.34		
		256-QAM	-27.89	8.41	10.05	2.50	V		0.040	15.96		
2640.000	PI/2 BPSK	-23.53	13.42	9.90	2.67	V	0.116	20.65	1	136		
	QPSK	-23.69	13.26	9.90	2.67	V	0.112	20.49				
	16-QAM	-24.73	12.22	9.90	2.67	V	0.088	19.45				
	64-QAM	-26.47	10.48	9.90	2.67	V	0.059	17.71				
	256-QAM	-28.14	8.81	9.90	2.67	V	0.040	16.04				

**8.2 RADIATED SPURIOUS EMISSIONS**

- NR Band: N41
- Bandwidth: 10 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
500202 (2501.010)	5 002.02	-61.01	10.70	-62.36	3.63	H	-55.29	-25.00	1	12
	7 503.03	-62.84	11.10	-55.83	4.50	V	-49.23	-25.00		
	10 004.04	-60.51	11.20	-52.05	5.26	H	-46.11	-25.00		
	12 505.05	-63.00	12.10	-53.66	6.04	H	-47.60	-25.00		
	15 006.06	-58.93	13.80	-52.33	6.65	H	-45.18	-25.00		
518598 (2592.990)	5 185.98	-60.55	11.00	-62.05	3.70	H	-54.75	-25.00	1	1
	7 778.97	-63.40	10.90	-56.02	4.61	V	-49.73	-25.00		
	10 371.96	-63.12	11.20	-52.42	5.41	V	-46.63	-25.00		
	12 964.95	-63.34	12.00	-53.41	6.11	V	-47.52	-25.00		
	15 557.94	-60.61	15.40	-55.28	6.77	V	-46.65	-25.00		
537000 (2685.000)	5 370.00	-61.32	11.50	-63.84	3.74	V	-56.08	-25.00	1	12
	8 055.00	-59.98	10.90	-52.77	4.71	V	-46.58	-25.00		
	10 740.00	-62.91	11.10	-52.31	5.50	H	-46.71	-25.00		
	13 425.00	-62.52	11.80	-51.67	6.22	H	-46.09	-25.00		
	16 110.00	-63.71	15.70	-54.57	6.91	H	-45.78	-25.00		

- NR Band: N41
- Bandwidth: 15 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
500700 (2503.500)	5 007.00	-62.17	10.70	-63.45	3.61	V	-56.36	-25.00	1	19
	7 510.50	-63.58	11.10	-56.51	4.50	H	-49.91	-25.00		
	10 014.00	-62.52	11.20	-53.91	5.27	H	-47.98	-25.00		
	12 517.50	-62.93	12.10	-53.30	6.04	H	-47.24	-25.00		
	15 021.00	-58.81	13.80	-52.33	6.65	V	-45.18	-25.00		
518598 (2592.990)	5 185.98	-62.21	11.00	-63.71	3.70	V	-56.41	-25.00	1	1
	7 778.97	-63.97	10.90	-56.59	4.61	V	-50.30	-25.00		
	10 371.96	-64.19	11.20	-53.49	5.41	H	-47.70	-25.00		
	12 964.95	-63.41	12.00	-53.48	6.11	V	-47.59	-25.00		
	15 557.94	-61.16	15.40	-55.83	6.77	V	-47.20	-25.00		
536496 (2682.480)	5 364.96	-61.84	11.50	-64.13	3.75	V	-56.38	-25.00	1	19
	8 047.44	-62.13	10.85	-54.95	4.69	H	-48.79	-25.00		
	10 729.92	-63.40	11.10	-52.17	5.47	H	-46.54	-25.00		
	13 412.40	-63.06	11.80	-52.39	6.21	H	-46.80	-25.00		
	16 094.88	-63.02	15.60	-53.56	6.91	V	-44.87	-25.00		

- NR Band: N41
- Bandwidth: 20 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
501204 (2506.020)	5 012.04	-62.32	10.70	-63.53	3.59	H	-56.42	-25.00	1	1
	7 518.06	-66.08	11.10	-58.97	4.51	H	-52.38	-25.00		
	10 024.08	-64.06	11.20	-55.24	5.27	H	-49.31	-25.00		
	12 530.10	-64.04	12.10	-54.22	6.01	H	-48.13	-25.00		
	15 036.12	-59.06	13.80	-52.82	6.65	V	-45.67	-25.00		
518598 (2592.990)	5 185.98	-61.19	11.00	-62.69	3.70	V	-55.39	-25.00	1	1
	7 778.97	-65.27	10.90	-57.89	4.61	H	-51.60	-25.00		
	10 371.96	-65.39	11.20	-54.69	5.41	V	-48.90	-25.00		
	12 964.95	-64.56	12.00	-54.63	6.11	H	-48.74	-25.00		
	15 557.94	-61.83	15.40	-56.50	6.77	V	-47.87	-25.00		
535998 (2679.990)	5 359.98	-63.37	11.50	-65.43	3.76	V	-57.69	-25.00	1	1
	8 039.97	-63.15	10.80	-55.98	4.68	V	-49.86	-25.00		
	10 719.96	-65.13	11.10	-53.50	5.46	V	-47.86	-25.00		
	13 399.95	-63.01	11.80	-52.66	6.22	H	-47.08	-25.00		
	16 079.94	-65.67	15.50	-56.39	6.90	H	-47.79	-25.00		

- NR Band: N41
- Bandwidth: 30 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
502200 (2511.000)	5 022.00	-62.07	10.70	-63.60	3.55	V	-56.45	-25.00	1	1
	7 533.00	-62.73	11.10	-55.25	4.50	V	-48.65	-25.00		
	10 044.00	-61.17	11.15	-52.32	5.27	V	-46.44	-25.00		
	12 555.00	-62.32	12.10	-53.01	6.00	V	-46.91	-25.00		
	15 066.00	-58.11	14.00	-52.50	6.65	V	-45.15	-25.00		
518598 (2592.990)	5 185.98	-62.14	11.00	-63.64	3.70	V	-56.34	-25.00	1	1
	7 778.97	-64.00	10.90	-56.62	4.61	H	-50.33	-25.00		
	10 371.96	-65.89	11.20	-55.19	5.41	V	-49.40	-25.00		
	12 964.95	-65.08	12.00	-55.15	6.11	H	-49.26	-25.00		
	15 557.94	-62.61	15.40	-57.28	6.77	V	-48.65	-25.00		
534996 (2674.980)	5 349.96	-63.10	11.50	-64.75	3.75	H	-57.00	-25.00	1	1
	8 024.94	-63.09	10.80	-56.38	4.62	H	-50.20	-25.00		
	10 699.92	-64.40	11.10	-52.72	5.48	H	-47.10	-25.00		
	13 374.90	-64.37	11.90	-54.31	6.23	H	-48.64	-25.00		
	16 049.88	-66.34	15.50	-57.49	6.90	H	-48.89	-25.00		



- NR Band: N41
- Bandwidth: 40 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
503202 (2516.010)	5 032.02	-61.30	10.70	-63.40	3.56	V	-56.26	-25.00	1	1
	7 548.03	-65.43	11.10	-58.09	4.50	V	-51.49	-25.00		
	10 064.04	-63.46	11.10	-54.65	5.28	V	-48.83	-25.00		
	12 580.05	-64.35	12.10	-54.72	6.06	V	-48.68	-25.00		
	15 096.06	-62.34	14.05	-57.01	6.67	H	-49.63	-25.00		
518598 (2592.990)	5 185.98	-62.61	11.00	-64.11	3.70	V	-56.81	-25.00	1	53
	7 778.97	-64.74	10.90	-57.36	4.61	H	-51.07	-25.00		
	10 371.96	-65.98	11.20	-55.28	5.41	V	-49.49	-25.00		
	12 964.95	-65.33	12.00	-55.40	6.11	H	-49.51	-25.00		
	15 557.94	-63.22	15.40	-57.89	6.77	V	-49.26	-25.00		
534000 (2670.000)	5 340.00	-61.92	11.40	-63.62	3.75	V	-55.97	-25.00	1	1
	8 010.00	-63.57	10.80	-56.50	4.62	V	-50.32	-25.00		
	10 680.00	-63.97	11.10	-52.51	5.46	H	-46.87	-25.00		
	13 350.00	-64.69	11.90	-54.64	6.21	V	-48.95	-25.00		
	16 020.00	-64.83	15.20	-56.48	6.68	V	-47.96	-25.00		

- NR Band: N41
- Bandwidth: 50 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
504204 (2521.020)	5 042.04	-62.27	10.70	-64.24	3.60	V	-57.14	-25.00	1	1
	7 563.06	-65.06	11.10	-58.24	4.52	V	-51.66	-25.00		
	10 084.08	-64.69	11.10	-55.47	5.30	V	-49.67	-25.00		
	12 605.10	-65.24	12.00	-55.74	6.05	V	-49.79	-25.00		
	15 126.12	-60.53	14.10	-54.57	6.67	V	-47.14	-25.00		
518598 (2592.990)	5 185.98	-62.80	11.00	-64.30	3.70	H	-57.00	-25.00	1	1
	7 778.97	-64.54	10.90	-57.16	4.61	H	-50.87	-25.00		
	10 371.96	-65.60	11.20	-54.90	5.41	H	-49.11	-25.00		
	12 964.95	-63.29	12.00	-53.36	6.11	H	-47.47	-25.00		
	15 557.94	-63.30	15.40	-57.97	6.77	H	-49.34	-25.00		
532998 (2664.990)	5 329.98	-62.50	11.40	-64.47	3.71	H	-56.78	-25.00	1	66
	7 994.97	-62.89	10.75	-55.48	4.66	V	-49.39	-25.00		
	10 659.96	-64.86	11.10	-52.70	5.49	H	-47.09	-25.00		
	13 324.95	-63.95	12.00	-53.24	6.19	V	-47.43	-25.00		
	15 989.94	-66.02	15.10	-58.20	6.88	H	-49.98	-25.00		

- NR Band: N41
- Bandwidth: 60 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
505200 (2526.000)	5 052.00	-62.40	10.70	-64.05	3.63	V	-56.98	-25.00	1	1
	7 578.00	-65.51	11.10	-58.72	4.54	V	-52.16	-25.00		
	10 104.00	-63.33	11.10	-54.49	5.29	H	-48.68	-25.00		
	12 630.00	-63.72	12.00	-54.49	6.02	V	-48.51	-25.00		
	15 156.00	-61.90	14.20	-56.41	6.67	H	-48.88	-25.00		
518598 (2592.990)	5 185.98	-62.68	11.00	-64.18	3.70	H	-56.88	-25.00	1	1
	7 778.97	-64.37	10.90	-56.99	4.61	V	-50.70	-25.00		
	10 371.96	-65.95	11.20	-55.25	5.41	V	-49.46	-25.00		
	12 964.95	-64.49	12.00	-54.56	6.11	H	-48.67	-25.00		
	15 557.94	-63.35	15.40	-58.02	6.77	H	-49.39	-25.00		
531996 (2659.980)	5 319.96	-63.08	11.40	-65.82	3.66	V	-58.08	-25.00	1	81
	7 979.94	-64.19	10.70	-56.94	4.67	V	-50.91	-25.00		
	10 639.92	-65.68	11.20	-54.25	5.49	V	-48.54	-25.00		
	13 299.90	-65.39	12.00	-55.24	6.19	V	-49.43	-25.00		
	15 959.88	-66.29	15.10	-57.63	6.87	V	-49.40	-25.00		

- NR Band: N41
- Bandwidth: 70 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
506202 (2531.010)	5 062.02	-62.77	10.70	-63.75	3.65	H	-56.70	-25.00	1	1
	7 593.03	-65.09	11.15	-58.05	4.53	V	-51.43	-25.00		
	10 124.04	-63.84	11.10	-54.96	5.30	H	-49.16	-25.00		
	12 655.05	-64.60	11.90	-55.09	6.03	H	-49.22	-25.00		
	15 186.06	-59.51	14.20	-54.26	6.67	V	-46.73	-25.00		
518598 (2592.990)	5 185.98	-62.93	11.00	-64.43	3.70	H	-57.13	-25.00	1	1
	7 778.97	-64.88	10.90	-57.50	4.61	H	-51.21	-25.00		
	10 371.96	-65.83	11.20	-55.13	5.41	H	-49.34	-25.00		
	12 964.95	-64.98	12.00	-55.05	6.11	H	-49.16	-25.00		
	15 557.94	-64.08	15.40	-58.75	6.77	V	-50.12	-25.00		
531000 (2655.000)	5 310.00	-63.64	11.40	-65.88	3.65	V	-58.13	-25.00	1	94
	7 965.00	-63.05	10.70	-55.88	4.65	V	-49.83	-25.00		
	10 620.00	-65.00	11.20	-54.31	5.41	H	-48.52	-25.00		
	13 275.00	-65.08	12.10	-54.75	6.22	V	-48.87	-25.00		
	15 930.00	-65.30	15.00	-57.03	6.88	V	-48.91	-25.00		

- NR Band: N41
- Bandwidth: 80 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
507204 (2536.020)	5 072.04	-62.54	10.70	-63.82	3.62	V	-56.74	-25.00	1	1
	7 608.06	-65.19	11.20	-58.18	4.52	V	-51.50	-25.00		
	10 144.08	-66.20	11.05	-56.73	5.32	H	-51.00	-25.00		
	12 680.10	-64.65	11.90	-54.44	6.06	H	-48.60	-25.00		
	15 216.12	-64.78	14.40	-59.82	6.69	H	-52.11	-25.00		
518598 (2592.990)	5 185.98	-63.21	11.00	-64.71	3.70	H	-57.41	-25.00	1	1
	7 778.97	-65.30	10.90	-57.92	4.61	H	-51.63	-25.00		
	10 371.96	-65.06	11.20	-54.36	5.41	H	-48.57	-25.00		
	12 964.95	-63.73	12.00	-53.80	6.11	H	-47.91	-25.00		
	15 557.94	-65.03	15.40	-59.70	6.77	H	-51.07	-25.00		
529998 (2649.990)	5 299.98	-64.08	11.40	-66.19	3.69	V	-58.48	-25.00	1	108
	7 949.97	-62.81	10.70	-55.50	4.64	V	-49.44	-25.00		
	10 599.96	-64.80	11.20	-53.61	5.41	V	-47.82	-25.00		
	13 249.95	-65.83	12.10	-55.77	6.18	H	-49.85	-25.00		
	15 899.94	-64.76	15.00	-56.93	6.87	V	-48.80	-25.00		

- NR Band: N41
- Bandwidth: 90 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
508200 (2541.000)	5 082.00	-63.79	10.70	-65.43	3.61	V	-58.34	-25.00	1	1
	7 623.00	-65.95	11.20	-59.55	4.52	V	-52.87	-25.00		
	10 164.00	-65.15	11.00	-56.07	5.33	V	-50.40	-25.00		
	12 705.00	-66.30	11.90	-55.78	6.06	V	-49.94	-25.00		
	15 246.00	-62.94	14.50	-57.06	6.73	V	-49.29	-25.00		
518598 (2592.990)	5 185.98	-63.22	11.00	-64.72	3.70	V	-57.42	-25.00	1	1
	7 778.97	-65.16	10.90	-57.78	4.61	V	-51.49	-25.00		
	10 371.96	-64.96	11.20	-54.26	5.41	V	-48.47	-25.00		
	12 964.95	-64.49	12.00	-54.56	6.11	V	-48.67	-25.00		
	15 557.94	-63.79	15.40	-58.46	6.77	V	-49.83	-25.00		
528996 (2644.980)	5 289.96	-64.20	11.30	-65.67	3.73	V	-58.10	-25.00	1	122
	7 934.94	-62.82	10.70	-55.47	4.64	V	-49.41	-25.00		
	10 579.92	-64.90	11.20	-54.45	5.46	V	-48.71	-25.00		
	13 224.90	-66.03	12.10	-56.00	6.16	H	-50.06	-25.00		
	15 869.88	-65.09	14.90	-58.34	6.85	H	-50.29	-25.00		

- NR Band: N41
- Bandwidth: 100 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
509202 (2546.010)	5 092.02	-62.61	10.70	-64.76	3.64	V	-57.70	-25.00	1	1
	7 638.03	-65.23	11.20	-58.84	4.53	V	-52.17	-25.00		
	10 184.04	-65.51	11.00	-56.05	5.33	V	-50.38	-25.00		
	12 730.05	-66.47	11.90	-56.02	6.02	V	-50.14	-25.00		
	15 276.06	-63.04	14.60	-57.17	6.71	V	-49.28	-25.00		
518598 (2592.990)	5 185.98	-63.33	11.00	-64.83	3.70	H	-57.53	-25.00	1	1
	7 778.97	-65.57	10.90	-58.19	4.61	H	-51.90	-25.00		
	10 371.96	-65.09	11.20	-54.39	5.41	H	-48.60	-25.00		
	12 964.95	-64.78	12.00	-54.85	6.11	V	-48.96	-25.00		
	15 557.94	-63.86	15.40	-58.53	6.77	V	-49.90	-25.00		
528000 (2640.000)	5 280.00	-64.31	11.30	-66.22	3.75	V	-58.67	-25.00	1	136
	7 920.00	-62.96	10.70	-55.78	4.63	V	-49.71	-25.00		
	10 560.00	-64.84	11.20	-54.93	5.45	V	-49.18	-25.00		
	13 200.00	-66.51	12.10	-56.07	6.19	H	-50.16	-25.00		
	15 840.00	-65.24	14.90	-58.13	6.84	V	-50.07	-25.00		

- ENDC-Mode : 12A(10 MHz)-n41A(15 MHz)

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
23095 (707.5)	1415.00	-60.23	7.61	-66.86	1.87	V	-61.11	-13.00
	2122.50	-61.84	8.98	-67.66	2.31	V	-60.99	-13.00
	2830.00	-62.12	10.52	-66.13	2.73	V	-58.34	-13.00

**8.3 PEAK-TO-AVERAGE RATIO**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( dB )
Sub6 n41	10 MHz	2592.990	BPSK	24	0	3.89
			QPSK			4.92
			16-QAM			5.73
			64-QAM			6.08
			256-QAM			6.66
	15 MHz		BPSK	36		3.65
			QPSK			5.03
			16-QAM			5.79
			64-QAM			6.11
			256-QAM			6.63
	20 MHz		BPSK	50		3.76
			QPSK			5.01
			16-QAM			5.77
			64-QAM			6.06
			256-QAM			6.51
	30 MHz		BPSK	75		3.81
			QPSK			4.87
			16-QAM			5.75
			64-QAM			5.98
			256-QAM			6.52
	40 MHz		BPSK	100		3.75
			QPSK			4.92
			16-QAM			5.76
			64-QAM			6.03
			256-QAM			6.63
	50 MHz		BPSK	128		3.80
			QPSK			4.97
			16-QAM			5.78
			64-QAM			6.09
			256-QAM			6.63
	60 MHz		BPSK	162		3.80
			QPSK			4.93
			16-QAM			5.81
			64-QAM			6.09
			256-QAM			6.47
	70 MHz		BPSK	180		4.17
			QPSK			5.03
			16-QAM			5.85
			64-QAM			6.12
			256-QAM			6.61
80 MHz	BPSK	216	3.60			
	QPSK		4.85			
	16-QAM		5.72			
	64-QAM		6.04			
	256-QAM		6.52			



Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( dB )
Sub6 n41	90 MHz	2592.990	BPSK	243	0	3.59
			QPSK			4.83
			16-QAM			5.73
			64-QAM			6.05
			256-QAM			6.53
	100 MHz	2592.990	BPSK	270		3.81
			QPSK			4.99
			16-QAM			5.83
			64-QAM			6.11
			256-QAM			6.51

**Note:**

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 124 ~ 178.

**8.4 OCCUPIED BANDWIDTH**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( MHz )
Sub6 n41	10 MHz	2592.990	BPSK	24	0	8.7453
			QPSK			8.6777
			16-QAM			8.6929
			64-QAM			8.6554
			256-QAM			8.6597
	15 MHz		BPSK	36		12.981
			QPSK			12.974
			16-QAM			12.981
			64-QAM			12.939
			256-QAM			13.111
	20 MHz		BPSK	50		17.919
			QPSK			18.013
			16-QAM			17.894
			64-QAM			18.004
			256-QAM			17.989
	30 MHz		BPSK	75		26.944
			QPSK			26.929
			16-QAM			27.001
			64-QAM			26.892
			256-QAM			26.840
	40 MHz		BPSK	100		35.766
			QPSK			35.758
			16-QAM			35.813
			64-QAM			35.871
			256-QAM			35.820
	50 MHz		BPSK	128		45.879
			QPSK			45.808
			16-QAM			45.882
			64-QAM			45.736
			256-QAM			45.872
	60 MHz		BPSK	162		57.748
			QPSK			57.828
			16-QAM			57.811
			64-QAM			57.736
			256-QAM			58.166
	70 MHz		BPSK	180		64.421
			QPSK			64.299
			16-QAM			64.360
			64-QAM			64.495
			256-QAM			64.539
80 MHz	BPSK	216	77.269			
	QPSK		77.066			
	16-QAM		76.998			
	64-QAM		77.039			
	256-QAM		77.303			

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( MHz )
Sub6 n41	90 MHz	2592.990	BPSK	243	0	87.013
			QPSK			86.711
			16-QAM			86.694
			64-QAM			86.500
			256-QAM			86.546
	100 MHz		BPSK	270		96.303
			QPSK			96.482
			16-QAM			96.409
			64-QAM			96.320
			256-QAM			96.393

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 69 ~ 123.


**8.5 CONDUCTED SPURIOUS EMISSIONS**

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
Sub6 n41	10	2501.010	5.7652	37.805	-70.119	-32.314	-25.00
		2592.990	4.9696	37.190	-70.576	-33.386	
		2685.000	4.9248	37.190	-70.563	-33.373	
	15	2503.500	3.7972	37.190	-69.351	-32.161	
		2592.990	3.7997	37.190	-70.831	-33.641	
		2682.480	8.8893	37.805	-70.378	-32.573	
	20	2506.020	9.4696	37.805	-70.457	-32.652	
		2592.990	3.7982	37.190	-70.770	-33.580	
		2679.990	9.1979	37.805	-70.283	-32.478	
	30	2511.000	9.9357	37.805	-69.824	-32.019	
		2592.990	8.8520	37.805	-70.831	-33.026	
		2674.980	9.1177	37.805	-70.781	-32.976	
	40	2516.010	3.7867	37.190	-70.873	-33.683	
		2592.990	4.9532	37.190	-70.929	-33.739	
		2670.000	9.1107	37.805	-70.122	-32.317	
	50	2521.020	3.7354	37.190	-70.947	-33.757	
		2592.990	9.6775	37.805	-70.724	-32.919	
		2664.990	7.1944	37.805	-70.242	-32.437	
	60	2526.000	4.0544	37.190	-70.911	-33.721	
		2592.990	8.2528	37.805	-70.886	-33.081	
		2659.980	8.2822	37.805	-70.182	-32.377	
	70	2531.010	8.2353	37.805	-70.719	-32.914	
		2592.990	9.9721	37.805	-71.162	-33.357	
		2655.000	4.0464	37.190	-71.092	-33.902	
	80	2536.020	3.1411	37.190	-71.243	-34.053	
		2592.990	3.8226	37.190	-71.121	-33.931	
		2649.990	8.8849	37.805	-70.996	-33.191	
	90	2541.000	3.7633	37.190	-70.201	-33.011	
		2592.990	9.7159	37.805	-71.033	-33.228	
		2644.980	4.9746	37.190	-70.162	-32.972	
100	2546.010	3.8051	37.190	-70.858	-33.668		
	2592.990	9.9850	37.805	-70.516	-32.711		
	2640.000	9.9895	37.805	-70.438	-32.633		

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 257 ~ 323.
2. Duty Cycle factor already applied on the factor.

- Duty Cycle Factor(dB) = 6.99

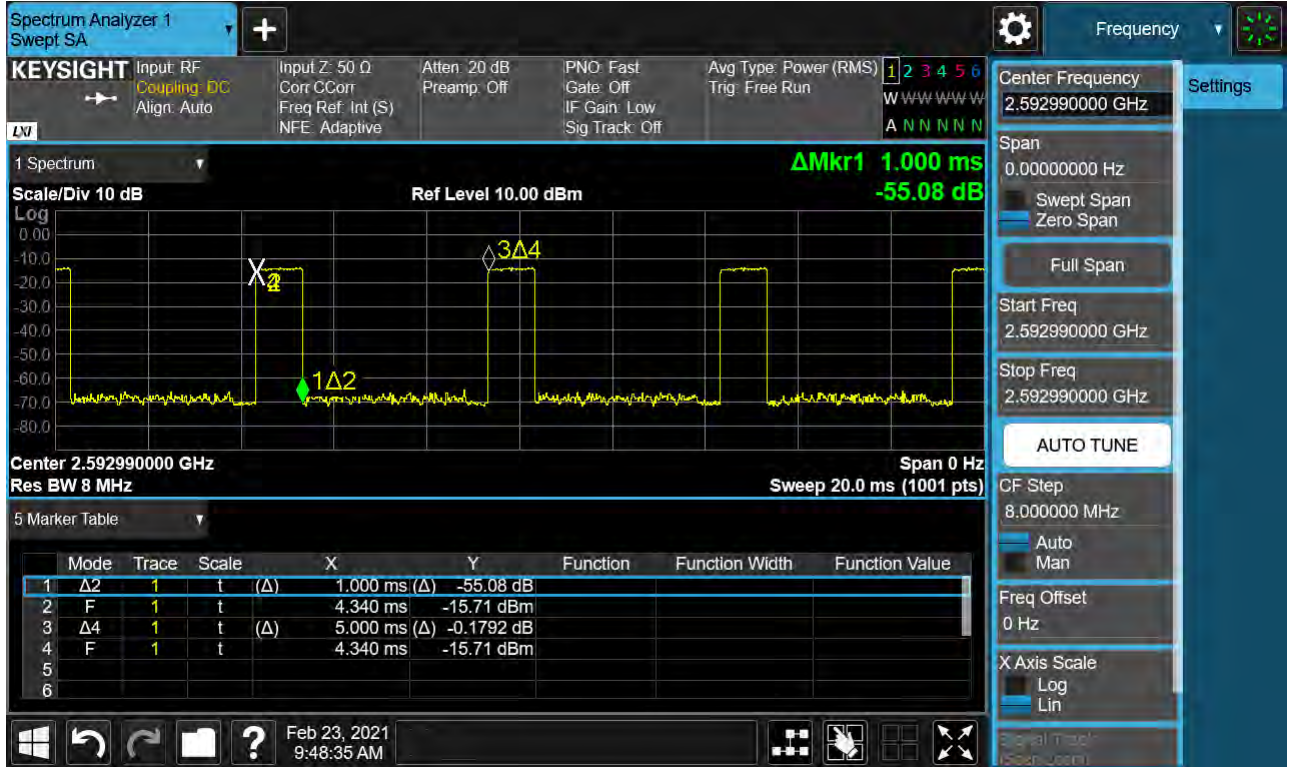

- Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter

- Result(dBm) = Reading + Factor

3. Factor(dB)

Frequency Range (GHz)	Factor [dB]
0.03 – 1	34.484
1 – 5	37.190
5 – 10	37.805
10 – 15	38.330
15 – 20	38.703
Above 20	39.345

**8.6 CHANNEL EDGE**

BW (MHz)	Frequency (MHz)	Mod	RB (Size/Offset)	2 495 MHz ~ 2 496 MHz	C.E ~ (C.E +1MHz)	2 490.5 MHz ~ 2 495 MHz	(C.E + 1 MHz) ~ (C.E + 5 MHz)	Below 2 490.5 MHz	(C.E + 5 MHz) ~ (C.E + X MHz)	Above (C.E + X MHz)
				Lower	Upper	Lower	Upper	Lower	Upper	Upper
10	2501.010	BPSK	Full RB	-22.34	-21.89	-22.41	-22.84	-28.68	-21.45	-35.25
15	2503.500	BPSK	Full RB	-22.36	-26.88	-23.94	-24.87	-26.08	-23.17	-37.62
20	2506.020	BPSK	Full RB	-22.72	-26.09	-25.10	-25.97	-26.86	-25.72	-37.89
30	2511.000	BPSK	Full RB	-23.30	-26.87	-25.34	-27.58	-29.61	-27.33	-39.96
40	2520.000	BPSK	Full RB	-23.90	-28.16	-26.31	-28.81	-30.44	-28.79	-41.38
50	2525.010	BPSK	Full RB	-23.20	-27.80	-27.00	-28.28	-30.56	-29.21	-40.41
60	2530.020	BPSK	Full RB	-16.76	-17.14	-26.82	-27.03	-30.93	-27.62	-41.44
70	2531.010	BPSK	Full RB	-24.81	-27.93	-28.05	-28.11	-29.17	-26.65	-41.83
80	2540.010	BPSK	Full RB	-24.48	-26.19	-28.12	-27.37	-30.91	-27.15	-42.34
90	2545.020	BPSK	Full RB	-22.51	-26.04	-27.13	-26.37	-28.65	-26.65	-38.49
100	2550.000	BPSK	Full RB	-21.36	-27.23	-28.81	-28.41	-30.31	-29.15	-42.57
Limit				-13.0	-10.0	-13.0	-10.0	-25.0	-13.0	-25.0

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	C.E ~ (C.E ± 1 MHz)		(C.E ± 1 MHz) ~ (C.E ± 5 MHz)	
					Lower	Upper	Lower	Upper
10 MHz	2592.990	BPSK	Full RB	0	-21.62	-21.35	-22.65	-23.00
	2685.000	BPSK	Full RB	0	-20.25	-21.90	-20.21	-21.19
15 MHz	2592.990	BPSK	Full RB	0	-22.11	-27.33	-22.73	-24.08
	2682.480	BPSK	Full RB	0	-19.73	-23.78	-19.02	-20.10
20 MHz	2592.990	BPSK	Full RB	0	-21.87	-24.48	-21.83	-21.34
	2679.990	BPSK	Full RB	0	-20.68	-23.00	-21.74	-21.73
30 MHz	2592.990	BPSK	Full RB	0	-21.85	-22.06	-24.02	-23.54
	2679.990	BPSK	Full RB	0	-20.47	-24.28	-22.19	-24.02
40 MHz	2592.990	BPSK	Full RB	0	-23.14	-26.97	-26.37	-27.51
	2670.000	BPSK	Full RB	0	-20.65	-22.96	-20.50	-23.54
50 MHz	2592.990	BPSK	Full RB	0	-23.43	-26.82	-27.85	-27.92
	2664.990	BPSK	Full RB	0	-19.73	-23.57	-22.50	-25.03
60 MHz	2592.990	BPSK	Full RB	0	-18.89	-18.97	-27.55	-27.18
	2659.980	BPSK	Full RB	0	-16.50	-16.97	-22.46	-23.61
70 MHz	2592.990	BPSK	Full RB	0	-23.24	-25.74	-26.67	-29.15
	2655.000	BPSK	Full RB	0	-19.27	-24.88	-21.90	-25.43
80 MHz	2592.990	BPSK	Full RB	0	-23.53	-26.60	-29.32	-28.69
	2649.990	BPSK	Full RB	0	-18.88	-23.66	-22.14	-25.13
90 MHz	2592.990	BPSK	Full RB	0	-22.60	-28.80	-28.61	-28.13
	2644.980	BPSK	Full RB	0	-19.17	-23.70	-21.67	-23.94
100 MHz	2592.990	BPSK	Full RB	0	-22.17	-30.17	-29.45	-30.04
	2640.000	BPSK	Full RB	0	-18.69	-24.27	-23.63	-25.83
Limit					-10.0		-10.0	

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	(C.E ± 5 MHz) ~ (C.E ± X MHz)		Above (C.E ± X MHz)	
					Lower	Upper	Lower	Upper
10 MHz	2592.990	BPSK	Full RB	0	-22.60	-23.01	-33.99	-33.70
	2685.000	BPSK	Full RB	0	-18.89	-22.00	-31.12	-33.30
15 MHz	2592.990	BPSK	Full RB	0	-24.20	-20.51	-35.31	-34.99
	2682.480	BPSK	Full RB	0	-21.42	-20.96	-34.68	-36.34
20 MHz	2592.990	BPSK	Full RB	0	-25.04	-23.59	-34.81	-35.24
	2679.990	BPSK	Full RB	0	-22.28	-21.73	-35.74	-38.20
30 MHz	2592.990	BPSK	Full RB	0	-25.55	-24.44	-39.02	-37.90
	2679.990	BPSK	Full RB	0	-26.20	-26.93	-39.75	-40.36
40 MHz	2592.990	BPSK	Full RB	0	-29.95	-27.77	-39.99	-38.95
	2670.000	BPSK	Full RB	0	-22.85	-25.19	-37.56	-39.20
50 MHz	2592.990	BPSK	Full RB	0	-28.86	-28.08	-41.60	-40.97
	2664.990	BPSK	Full RB	0	-25.57	-27.50	-41.23	-47.04
60 MHz	2592.990	BPSK	Full RB	0	-27.26	-27.87	-40.95	-39.57
	2659.980	BPSK	Full RB	0	-21.12	-25.66	-43.80	-47.10
70 MHz	2592.990	BPSK	Full RB	0	-28.80	-27.45	-43.50	-41.44
	2655.000	BPSK	Full RB	0	-22.05	-27.93	-44.80	-47.44
80 MHz	2592.990	BPSK	Full RB	0	-30.80	-29.44	-47.50	-45.13
	2649.990	BPSK	Full RB	0	-22.29	-26.07	-42.82	-47.38
90 MHz	2592.990	BPSK	Full RB	0	-29.73	-28.81	-47.50	-43.91
	2644.980	BPSK	Full RB	0	-21.93	-25.74	-40.90	-47.11
100 MHz	2592.990	BPSK	Full RB	0	-29.62	-31.86	-47.61	-47.16
	2640.000	BPSK	Full RB	0	-24.82	-26.96	-44.33	-47.35
Limit					-13.0		-25.0	

**Note:**

1. C.E = Channel Edge
2. X = X is the greater of 6 MHz or the actual emission bandwidth
3. Duty Cycle factor already applied on the factor.
  - Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
  - Result(dBm) = Reading + Factor
  - Duty Cycle Factor(dB) = 6.99
4. Plots of the EUT's Channel Edge are shown Page 179 ~ 256. (1RB & Full RB)



**8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE**

- ▣ BandWidth: 10 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2501.010	100 %	+20(Ref)	2501 009 989	0.0	0.000 000	0.000
	100 %	-30	2501 009 971	-18.7	-0.000 001	-0.007
	100 %	-20	2501 009 980	-9.4	0.000 000	-0.004
	100 %	-10	2501 009 968	-21.2	-0.000 001	-0.008
	100 %	0	2501 009 969	-20.6	-0.000 001	-0.008
	100 %	+10	2501 009 969	-20.6	-0.000 001	-0.008
	100 %	+30	2501 009 974	-15.2	-0.000 001	-0.006
	100 %	+40	2501 009 974	-15.7	-0.000 001	-0.006
	100 %	+50	2501 009 974	-15.0	-0.000 001	-0.006
	Batt. Endpoint	+20	2501 009 974	-15.3	-0.000 001	-0.006
2685.000	100 %	+20(Ref)	2684 999 981	0.0	0.000 000	0.000
	100 %	-30	2684 999 955	-26.2	-0.000 001	-0.010
	100 %	-20	2684 999 958	-22.7	-0.000 001	-0.008
	100 %	-10	2684 999 961	-20.0	-0.000 001	-0.007
	100 %	0	2684 999 967	-13.5	-0.000 001	-0.005
	100 %	+10	2684 999 956	-24.9	-0.000 001	-0.009
	100 %	+30	2684 999 956	-25.1	-0.000 001	-0.009
	100 %	+40	2684 999 966	-15.0	-0.000 001	-0.006
	100 %	+50	2684 999 964	-16.8	-0.000 001	-0.006
	Batt. Endpoint	+20	2684 999 957	-23.6	-0.000 001	-0.009

- ▣ BandWidth: 15 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2503.500	100 %	+20(Ref)	2503 499 989	0.0	0.000 000	0.000
	100 %	-30	2503 499 979	-9.8	0.000 000	-0.004
	100 %	-20	2503 499 975	-13.7	-0.000 001	-0.005
	100 %	-10	2503 499 968	-20.7	-0.000 001	-0.008
	100 %	0	2503 499 973	-16.0	-0.000 001	-0.006
	100 %	+10	2503 499 971	-17.5	-0.000 001	-0.007
	100 %	+30	2503 499 972	-16.8	-0.000 001	-0.007
	100 %	+40	2503 499 972	-16.9	-0.000 001	-0.007
	100 %	+50	2503 499 972	-17.1	-0.000 001	-0.007
	Batt. Endpoint	+20	2503 499 972	-17.0	-0.000 001	-0.007
2682.480	100 %	+20(Ref)	2682 479 976	0.0	0.000 000	0.000
	100 %	-30	2682 479 962	-14.4	-0.000 001	-0.005
	100 %	-20	2682 479 961	-15.6	-0.000 001	-0.006
	100 %	-10	2682 479 961	-15.3	-0.000 001	-0.006
	100 %	0	2682 479 949	-27.1	-0.000 001	-0.010
	100 %	+10	2682 479 957	-19.5	-0.000 001	-0.007
	100 %	+30	2682 479 950	-25.8	-0.000 001	-0.010
	100 %	+40	2682 479 955	-20.7	-0.000 001	-0.008
	100 %	+50	2682 479 959	-17.6	-0.000 001	-0.007
	Batt. Endpoint	+20	2682 479 959	-16.8	-0.000 001	-0.006

- ▣ BandWidth: 20 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2506.020	100 %	+20(Ref)	2506 019 988	0.0	0.000 000	0.000
	100 %	-30	2506 019 968	-20.6	-0.000 001	-0.008
	100 %	-20	2506 019 973	-15.3	-0.000 001	-0.006
	100 %	-10	2506 019 978	-10.6	0.000 000	-0.004
	100 %	0	2506 019 969	-19.6	-0.000 001	-0.008
	100 %	+10	2506 019 979	-9.7	0.000 000	-0.004
	100 %	+30	2506 019 979	-9.4	0.000 000	-0.004
	100 %	+40	2506 019 974	-14.8	-0.000 001	-0.006
	100 %	+50	2506 019 974	-14.6	-0.000 001	-0.006
	Batt. Endpoint	+20	2506 019 973	-15.3	-0.000 001	-0.006
2679.990	100 %	+20(Ref)	2679 989 971	0.0	0.000 000	0.000
	100 %	-30	2679 989 957	-14.2	-0.000 001	-0.005
	100 %	-20	2679 989 954	-17.2	-0.000 001	-0.006
	100 %	-10	2679 989 957	-13.7	-0.000 001	-0.005
	100 %	0	2679 989 954	-16.4	-0.000 001	-0.006
	100 %	+10	2679 989 949	-21.3	-0.000 001	-0.008
	100 %	+30	2679 989 944	-26.4	-0.000 001	-0.010
	100 %	+40	2679 989 946	-24.7	-0.000 001	-0.009
	100 %	+50	2679 989 956	-14.4	-0.000 001	-0.005
	Batt. Endpoint	+20	2679 989 957	-14.0	-0.000 001	-0.005

- ▣ BandWidth: 30 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2511.000	100 %	+20(Ref)	2510 999 986	0.0	0.000 000	0.000
	100 %	-30	2510 999 971	-14.8	-0.000 001	-0.006
	100 %	-20	2510 999 972	-13.9	-0.000 001	-0.006
	100 %	-10	2510 999 967	-19.1	-0.000 001	-0.008
	100 %	0	2510 999 964	-21.7	-0.000 001	-0.009
	100 %	+10	2510 999 966	-20.3	-0.000 001	-0.008
	100 %	+30	2510 999 961	-25.1	-0.000 001	-0.010
	100 %	+40	2510 999 976	-9.9	0.000 000	-0.004
	100 %	+50	2510 999 971	-14.3	-0.000 001	-0.006
	Batt. Endpoint	+20	2510 999 971	-14.7	-0.000 001	-0.006
2674.980	100 %	+20(Ref)	2674 979 975	0.0	0.000 000	0.000
	100 %	-30	2674 979 958	-17.2	-0.000 001	-0.006
	100 %	-20	2674 979 956	-19.1	-0.000 001	-0.007
	100 %	-10	2674 979 950	-25.7	-0.000 001	-0.010
	100 %	0	2674 979 954	-21.6	-0.000 001	-0.008
	100 %	+10	2674 979 947	-28.3	-0.000 001	-0.011
	100 %	+30	2674 979 950	-25.5	-0.000 001	-0.010
	100 %	+40	2674 979 950	-25.5	-0.000 001	-0.010
	100 %	+50	2674 979 956	-18.8	-0.000 001	-0.007
	Batt. Endpoint	+20	2674 979 954	-21.0	-0.000 001	-0.008

- ▣ BandWidth: 40 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2516.010	100 %	+20(Ref)	2516 009 984	0.0	0.000 000	0.000
	100 %	-30	2516 009 968	-16.1	-0.000 001	-0.006
	100 %	-20	2516 009 968	-16.3	-0.000 001	-0.006
	100 %	-10	2516 009 962	-21.7	-0.000 001	-0.009
	100 %	0	2516 009 968	-15.4	-0.000 001	-0.006
	100 %	+10	2516 009 964	-19.3	-0.000 001	-0.008
	100 %	+30	2516 009 971	-12.4	0.000 000	-0.005
	100 %	+40	2516 009 969	-14.3	-0.000 001	-0.006
	100 %	+50	2516 009 967	-16.3	-0.000 001	-0.006
	Batt. Endpoint	+20	2516 009 963	-20.7	-0.000 001	-0.008
2670.000	100 %	+20(Ref)	2669 999 986	0.0	0.000 000	0.000
	100 %	-30	2669 999 965	-21.2	-0.000 001	-0.008
	100 %	-20	2669 999 967	-18.7	-0.000 001	-0.007
	100 %	-10	2669 999 966	-19.6	-0.000 001	-0.007
	100 %	0	2669 999 960	-25.9	-0.000 001	-0.010
	100 %	+10	2669 999 966	-19.9	-0.000 001	-0.007
	100 %	+30	2669 999 967	-19.4	-0.000 001	-0.007
	100 %	+40	2669 999 962	-24.2	-0.000 001	-0.009
	100 %	+50	2669 999 962	-23.7	-0.000 001	-0.009
	Batt. Endpoint	+20	2669 999 959	-26.6	-0.000 001	-0.010

- ▣ BandWidth: 50 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2521.020	100 %	+20(Ref)	2521 019 985	0.0	0.000 000	0.000
	100 %	-30	2521 019 973	-12.2	0.000 000	-0.005
	100 %	-20	2521 019 969	-16.2	-0.000 001	-0.006
	100 %	-10	2521 019 974	-11.6	0.000 000	-0.005
	100 %	0	2521 019 980	-5.2	0.000 000	-0.002
	100 %	+10	2521 019 973	-12.6	-0.000 001	-0.005
	100 %	+30	2521 019 974	-11.6	0.000 000	-0.005
	100 %	+40	2521 019 971	-14.4	-0.000 001	-0.006
	100 %	+50	2521 019 970	-15.1	-0.000 001	-0.006
	Batt. Endpoint	+20	2521 019 970	-14.8	-0.000 001	-0.006
2664.990	100 %	+20(Ref)	2664 989 974	0.0	0.000 000	0.000
	100 %	-30	2664 989 957	-17.1	-0.000 001	-0.006
	100 %	-20	2664 989 953	-21.1	-0.000 001	-0.008
	100 %	-10	2664 989 956	-17.8	-0.000 001	-0.007
	100 %	0	2664 989 950	-23.3	-0.000 001	-0.009
	100 %	+10	2664 989 944	-29.7	-0.000 001	-0.011
	100 %	+30	2664 989 954	-19.3	-0.000 001	-0.007
	100 %	+40	2664 989 959	-14.3	-0.000 001	-0.005
	100 %	+50	2664 989 946	-27.7	-0.000 001	-0.010
	Batt. Endpoint	+20	2664 989 951	-22.5	-0.000 001	-0.008

- ▣ BandWidth: 60 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2526.000	100 %	+20(Ref)	2525 999 984	0.0	0.000 000	0.000
	100 %	-30	2525 999 968	-16.8	-0.000 001	-0.007
	100 %	-20	2525 999 964	-20.3	-0.000 001	-0.008
	100 %	-10	2525 999 961	-23.9	-0.000 001	-0.009
	100 %	0	2525 999 961	-23.9	-0.000 001	-0.009
	100 %	+10	2525 999 967	-17.5	-0.000 001	-0.007
	100 %	+30	2525 999 971	-13.9	-0.000 001	-0.006
	100 %	+40	2525 999 965	-19.1	-0.000 001	-0.008
	100 %	+50	2525 999 965	-19.1	-0.000 001	-0.008
	Batt. Endpoint	+20	2525 999 973	-11.3	0.000 000	-0.004
2659.980	100 %	+20(Ref)	2659 979 993	0.0	0.000 000	0.000
	100 %	-30	2659 979 983	-9.9	0.000 000	-0.004
	100 %	-20	2659 979 971	-21.5	-0.000 001	-0.008
	100 %	-10	2659 979 971	-21.5	-0.000 001	-0.008
	100 %	0	2659 979 971	-22.1	-0.000 001	-0.008
	100 %	+10	2659 979 970	-23.0	-0.000 001	-0.009
	100 %	+30	2659 979 970	-23.0	-0.000 001	-0.009
	100 %	+40	2659 979 977	-15.7	-0.000 001	-0.006
	100 %	+50	2659 979 967	-26.1	-0.000 001	-0.010
	Batt. Endpoint	+20	2659 979 977	-15.7	-0.000 001	-0.006

- ▣ BandWidth: 70 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2531.010	100 %	+20(Ref)	2531 009 989	0.0	0.000 000	0.000
	100 %	-30	2531 009 983	-6.2	0.000 000	-0.002
	100 %	-20	2531 009 983	-6.2	0.000 000	-0.002
	100 %	-10	2531 009 972	-16.7	-0.000 001	-0.007
	100 %	0	2531 009 974	-15.6	-0.000 001	-0.006
	100 %	+10	2531 009 978	-10.8	0.000 000	-0.004
	100 %	+30	2531 009 978	-10.8	0.000 000	-0.004
	100 %	+40	2531 009 971	-18.0	-0.000 001	-0.007
	100 %	+50	2531 009 980	-9.5	0.000 000	-0.004
	Batt. Endpoint	+20	2531 009 978	-10.9	0.000 000	-0.004
2655.000	100 %	+20(Ref)	2654 999 982	0.0	0.000 000	0.000
	100 %	-30	2654 999 968	-13.7	-0.000 001	-0.005
	100 %	-20	2654 999 968	-13.7	-0.000 001	-0.005
	100 %	-10	2654 999 967	-15.3	-0.000 001	-0.006
	100 %	0	2654 999 964	-17.9	-0.000 001	-0.007
	100 %	+10	2654 999 958	-24.4	-0.000 001	-0.009
	100 %	+30	2654 999 969	-12.7	0.000 000	-0.005
	100 %	+40	2654 999 969	-12.7	0.000 000	-0.005
	100 %	+50	2654 999 961	-20.8	-0.000 001	-0.008
	Batt. Endpoint	+20	2654 999 968	-14.5	-0.000 001	-0.005



- ▣ BandWidth: 80 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2536.020	100 %	+20(Ref)	2536 019 985	0.0	0.000 000	0.000
	100 %	-30	2536 019 969	-15.4	-0.000 001	-0.006
	100 %	-20	2536 019 966	-18.6	-0.000 001	-0.007
	100 %	-10	2536 019 969	-15.7	-0.000 001	-0.006
	100 %	0	2536 019 969	-15.7	-0.000 001	-0.006
	100 %	+10	2536 019 972	-12.6	0.000 000	-0.005
	100 %	+30	2536 019 972	-12.7	-0.000 001	-0.005
	100 %	+40	2536 019 967	-17.5	-0.000 001	-0.007
	100 %	+50	2536 019 967	-17.5	-0.000 001	-0.007
	Batt. Endpoint	+20	2536 019 969	-16.0	-0.000 001	-0.006
2649.990	100 %	+20(Ref)	2649 989 980	0.0	0.000 000	0.000
	100 %	-30	2649 989 955	-25.8	-0.000 001	-0.010
	100 %	-20	2649 989 955	-25.8	-0.000 001	-0.010
	100 %	-10	2649 989 959	-21.6	-0.000 001	-0.008
	100 %	0	2649 989 964	-16.2	-0.000 001	-0.006
	100 %	+10	2649 989 963	-17.5	-0.000 001	-0.007
	100 %	+30	2649 989 963	-17.5	-0.000 001	-0.007
	100 %	+40	2649 989 962	-18.1	-0.000 001	-0.007
	100 %	+50	2649 989 962	-18.8	-0.000 001	-0.007
	Batt. Endpoint	+20	2649 989 960	-20.0	-0.000 001	-0.008

- ▣ BandWidth: 90 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band


Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2541.000	100 %	+20(Ref)	2540 999 984	0.0	0.000 000	0.000
	100 %	-30	2540 999 972	-11.5	0.000 000	-0.005
	100 %	-20	2540 999 963	-20.5	-0.000 001	-0.008
	100 %	-10	2540 999 966	-17.9	-0.000 001	-0.007
	100 %	0	2540 999 966	-17.9	-0.000 001	-0.007
	100 %	+10	2540 999 965	-18.4	-0.000 001	-0.007
	100 %	+30	2540 999 971	-12.6	0.000 000	-0.005
	100 %	+40	2540 999 964	-20.1	-0.000 001	-0.008
	100 %	+50	2540 999 965	-18.7	-0.000 001	-0.007
	Batt. Endpoint	+20	2540 999 965	-18.7	-0.000 001	-0.007
2644.980	100 %	+20(Ref)	2644 979 984	0.0	0.000 000	0.000
	100 %	-30	2644 979 967	-17.3	-0.000 001	-0.007
	100 %	-20	2644 979 963	-21.1	-0.000 001	-0.008
	100 %	-10	2644 979 963	-21.1	-0.000 001	-0.008
	100 %	0	2644 979 970	-13.7	-0.000 001	-0.005
	100 %	+10	2644 979 963	-20.5	-0.000 001	-0.008
	100 %	+30	2644 979 963	-20.5	-0.000 001	-0.008
	100 %	+40	2644 979 969	-15.5	-0.000 001	-0.006
	100 %	+50	2644 979 966	-17.6	-0.000 001	-0.007
	Batt. Endpoint	+20	2644 979 967	-16.6	-0.000 001	-0.006

- ▣ BandWidth: 100 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2546.010	100 %	+20(Ref)	2546 009 985	0.0	0.000 000	0.000
	100 %	-30	2546 009 975	-10.3	0.000 000	-0.004
	100 %	-20	2546 009 968	-16.9	-0.000 001	-0.007
	100 %	-10	2546 009 968	-16.9	-0.000 001	-0.007
	100 %	0	2546 009 966	-19.0	-0.000 001	-0.007
	100 %	+10	2546 009 972	-13.2	-0.000 001	-0.005
	100 %	+30	2546 009 976	-8.8	0.000 000	-0.003
	100 %	+40	2546 009 976	-8.8	0.000 000	-0.003
	100 %	+50	2546 009 971	-14.2	-0.000 001	-0.006
	Batt. Endpoint	+20	2546 009 961	-23.9	-0.000 001	-0.009
2640.000	100 %	+20(Ref)	2639 999 986	0.0	0.000 000	0.000
	100 %	-30	2639 999 972	-14.5	-0.000 001	-0.006
	100 %	-20	2639 999 971	-15.3	-0.000 001	-0.006
	100 %	-10	2639 999 971	-15.3	-0.000 001	-0.006
	100 %	0	2639 999 978	-8.7	0.000 000	-0.003
	100 %	+10	2639 999 969	-17.6	-0.000 001	-0.007
	100 %	+30	2639 999 970	-16.8	-0.000 001	-0.006
	100 %	+40	2639 999 970	-16.8	-0.000 001	-0.006
	100 %	+50	2639 999 969	-17.8	-0.000 001	-0.007
	Batt. Endpoint	+20	2639 999 975	-11.8	0.000 000	-0.004

## 9. TEST PLOTS

Sub6 n41. Occupied Bandwidth Plot (10 MHz Ch.518598 BPSK )

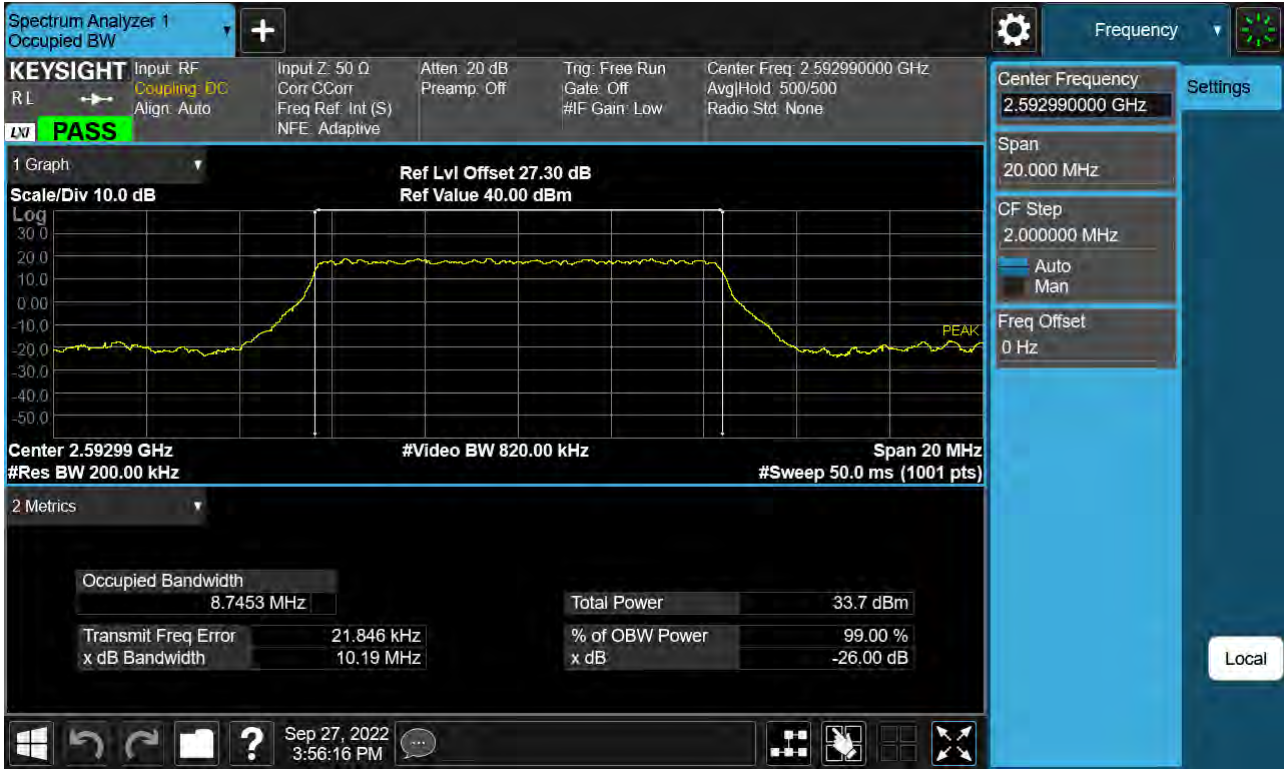


Sub6 n41. Occupied Bandwidth Plot (10 MHz Ch.518598 QPSK )



Sub6 n41. Occupied Bandwidth Plot (10 MHz Ch.518598 16-QAM )



Sub6 n41. Occupied Bandwidth Plot (10 MHz Ch.518598 64-QAM )

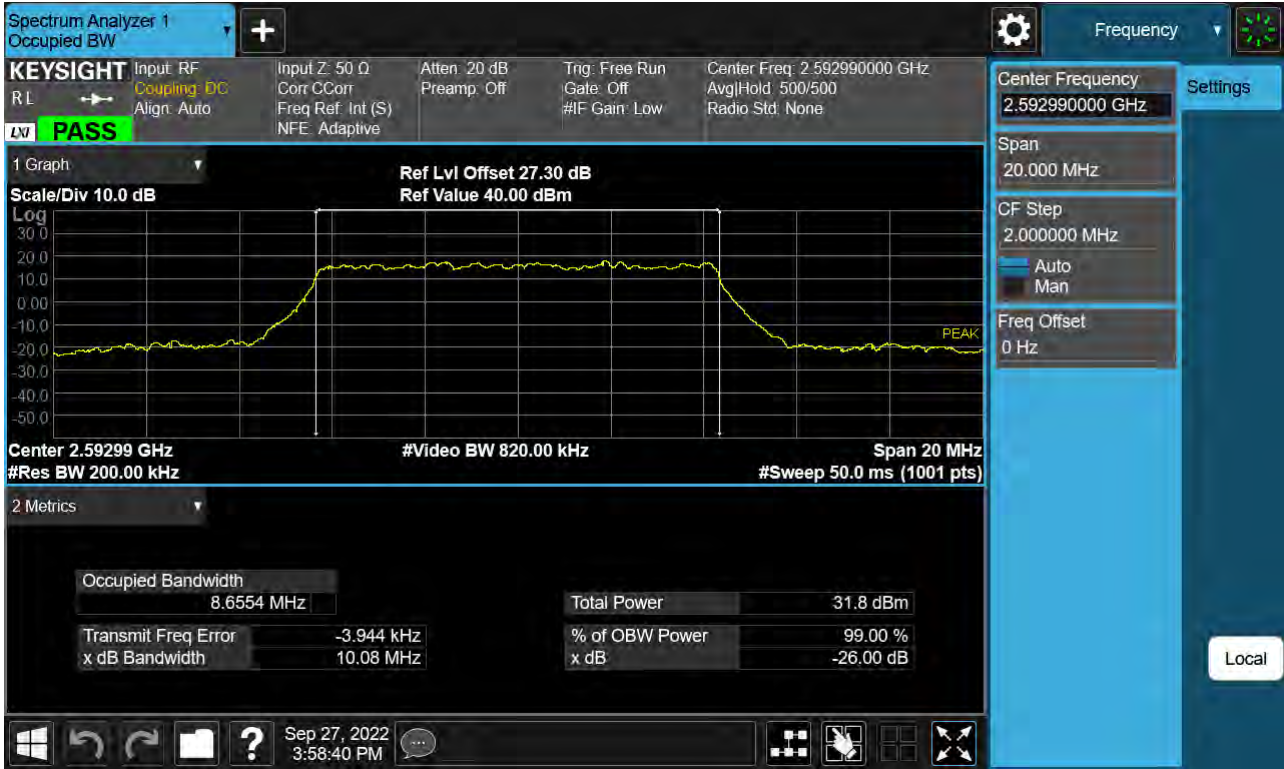



Sub6 n41. Occupied Bandwidth Plot (10 MHz Ch.518598 256-QAM )



Sub6 n41. Occupied Bandwidth Plot (15 MHz Ch.518598 BPSK )



Sub6 n41. Occupied Bandwidth Plot (15 MHz Ch.518598 QPSK )




Sub6 n41. Occupied Bandwidth Plot (15 MHz Ch.518598 16-QAM )



Sub6 n41. Occupied Bandwidth Plot (15 MHz Ch.518598 64-QAM )



Sub6 n41. Occupied Bandwidth Plot (15 MHz Ch.518598 256-QAM )

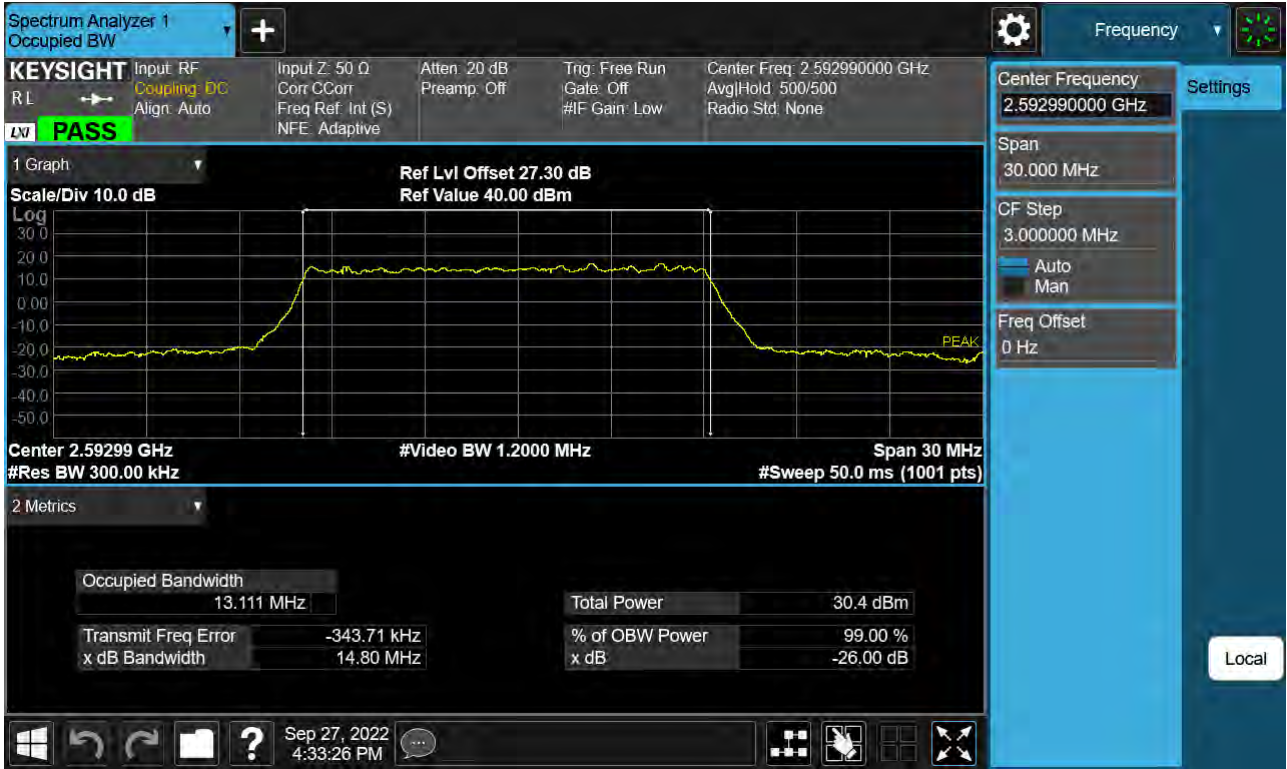

Sub6 n41. Occupied Bandwidth Plot (20 MHz Ch.518598 BPSK )



Sub6 n41. Occupied Bandwidth Plot (20 MHz Ch.518598 QPSK )





Sub6 n41. Occupied Bandwidth Plot (20 MHz Ch.518598 16-QAM )



Sub6 n41. Occupied Bandwidth Plot (20 MHz Ch.518598 64-QAM )




Sub6 n41. Occupied Bandwidth Plot (20 MHz Ch.518598 256-QAM )




Sub6 n41. Occupied Bandwidth Plot (30 MHz Ch.518598 BPSK )



Sub6 n41. Occupied Bandwidth Plot (30 MHz Ch.518598 QPSK )

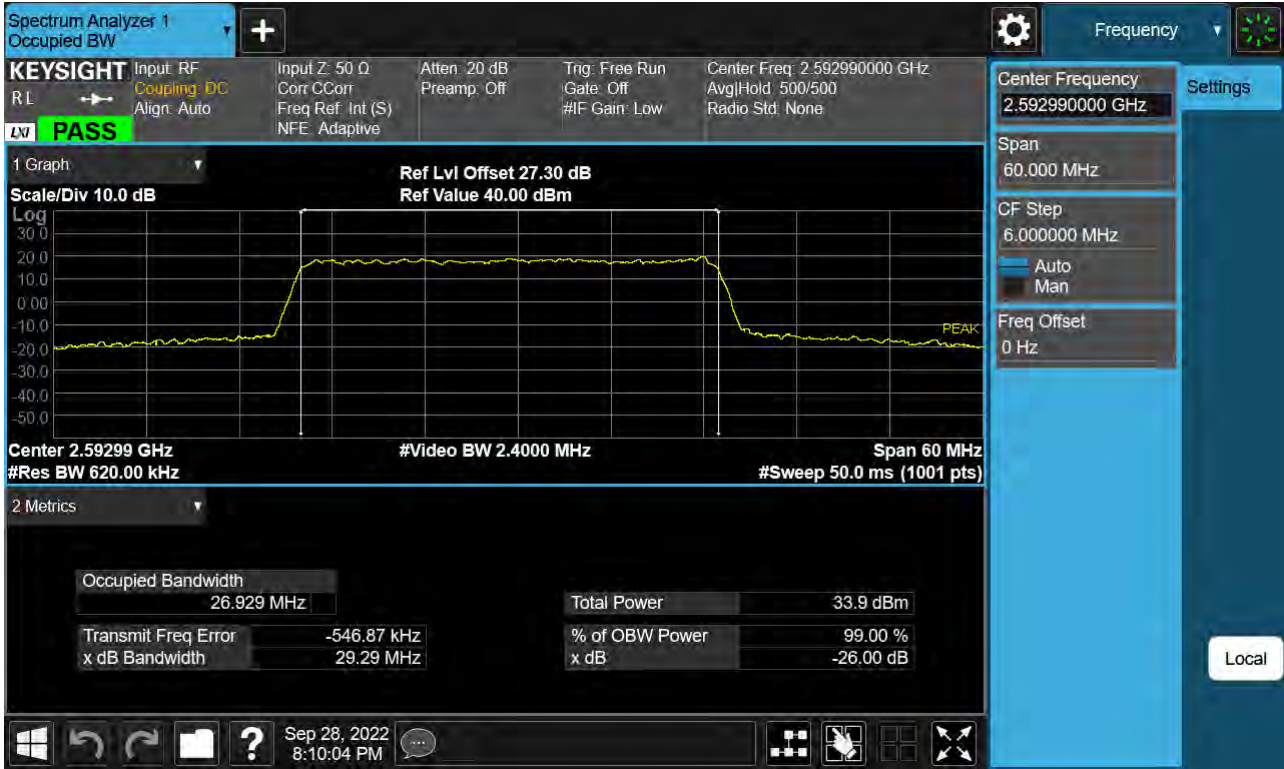

Sub6 n41. Occupied Bandwidth Plot (30 MHz Ch.518598 16-QAM )

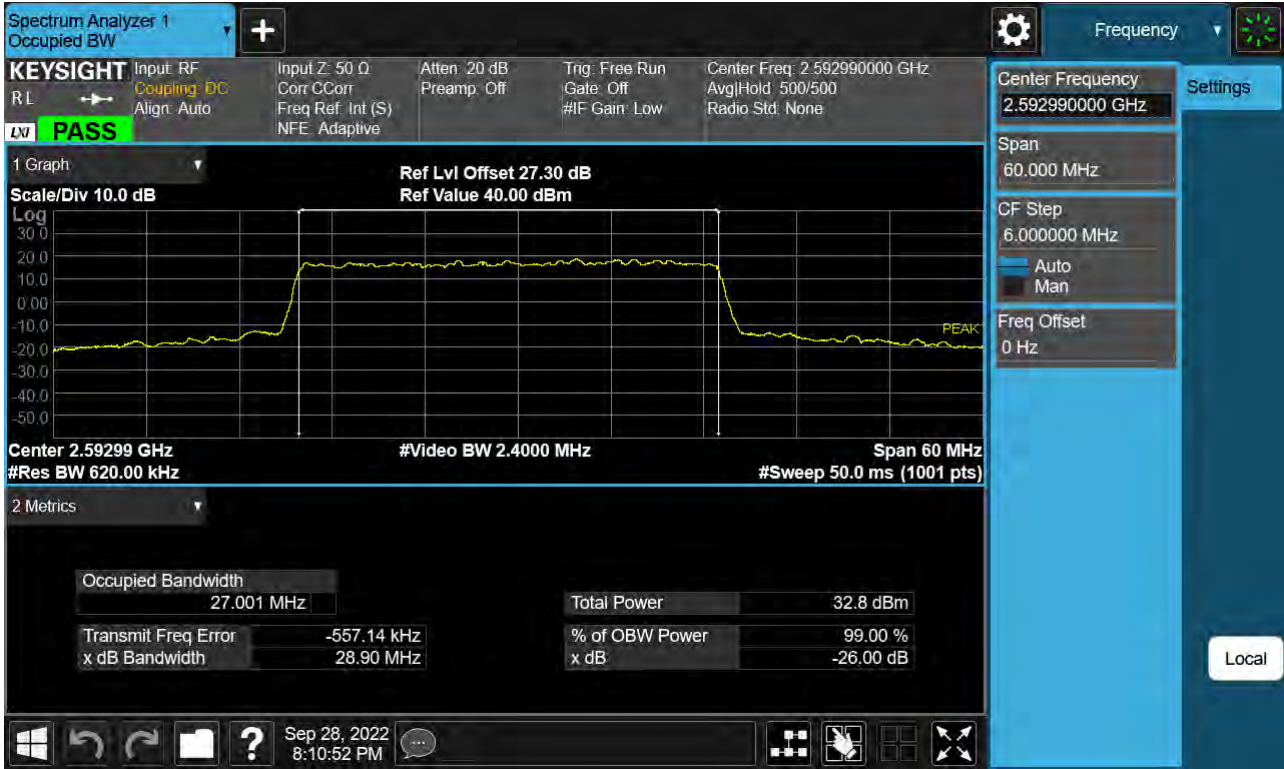

Sub6 n41. Occupied Bandwidth Plot (30 MHz Ch.518598 64-QAM )



Sub6 n41. Occupied Bandwidth Plot (30 MHz Ch.518598 256-QAM )






Sub6 n41. Occupied Bandwidth Plot (40 MHz Ch.518598 BPSK )



Sub6 n41. Occupied Bandwidth Plot (40 MHz Ch.518598 QPSK )

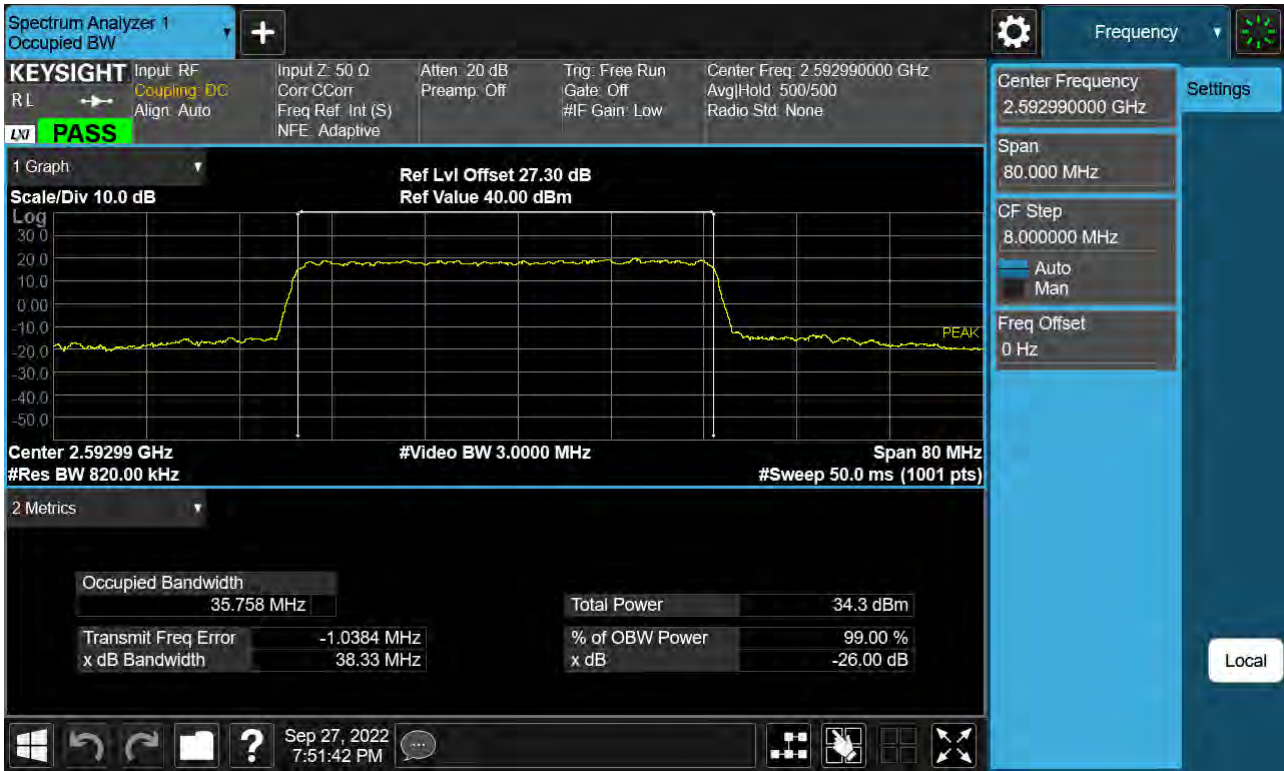

Sub6 n41. Occupied Bandwidth Plot (40 MHz Ch.518598 16-QAM )




Sub6 n41. Occupied Bandwidth Plot (40 MHz Ch.518598 64-QAM )




Sub6 n41. Occupied Bandwidth Plot (40 MHz Ch.518598 256-QAM )



Sub6 n41. Occupied Bandwidth Plot (50 MHz Ch.518598 BPSK )

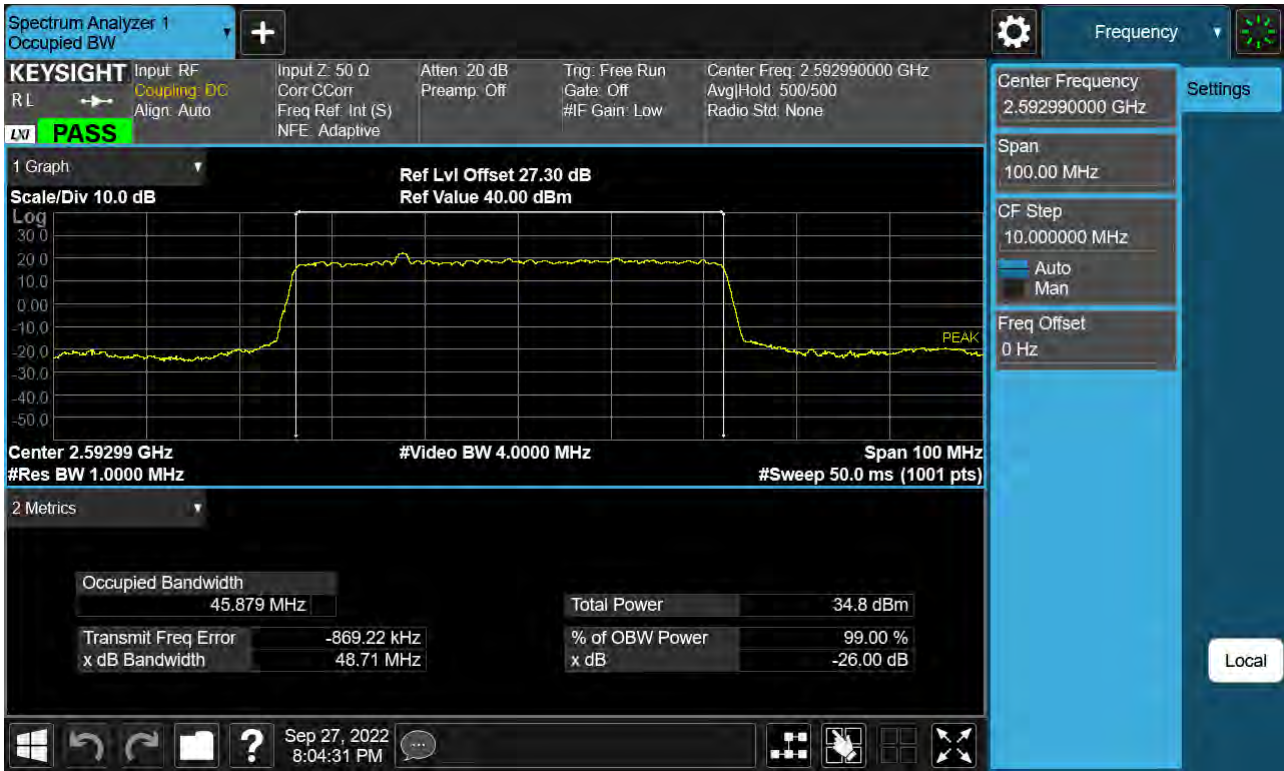

Sub6 n41. Occupied Bandwidth Plot (50 MHz Ch.518598 QPSK )

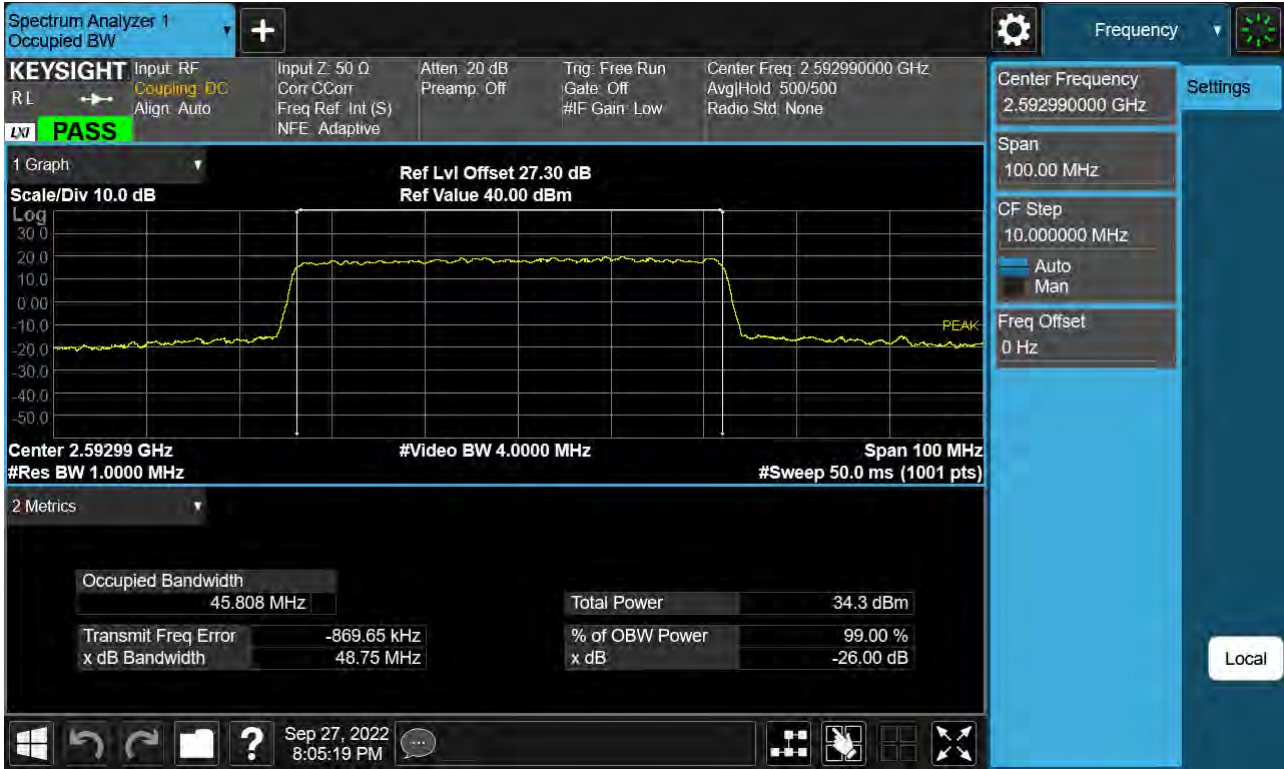

Sub6 n41. Occupied Bandwidth Plot (50 MHz Ch.518598 16-QAM )







Sub6 n41. Occupied Bandwidth Plot (50 MHz Ch.518598 64-QAM )




Sub6 n41. Occupied Bandwidth Plot (50 MHz Ch.518598 256-QAM )

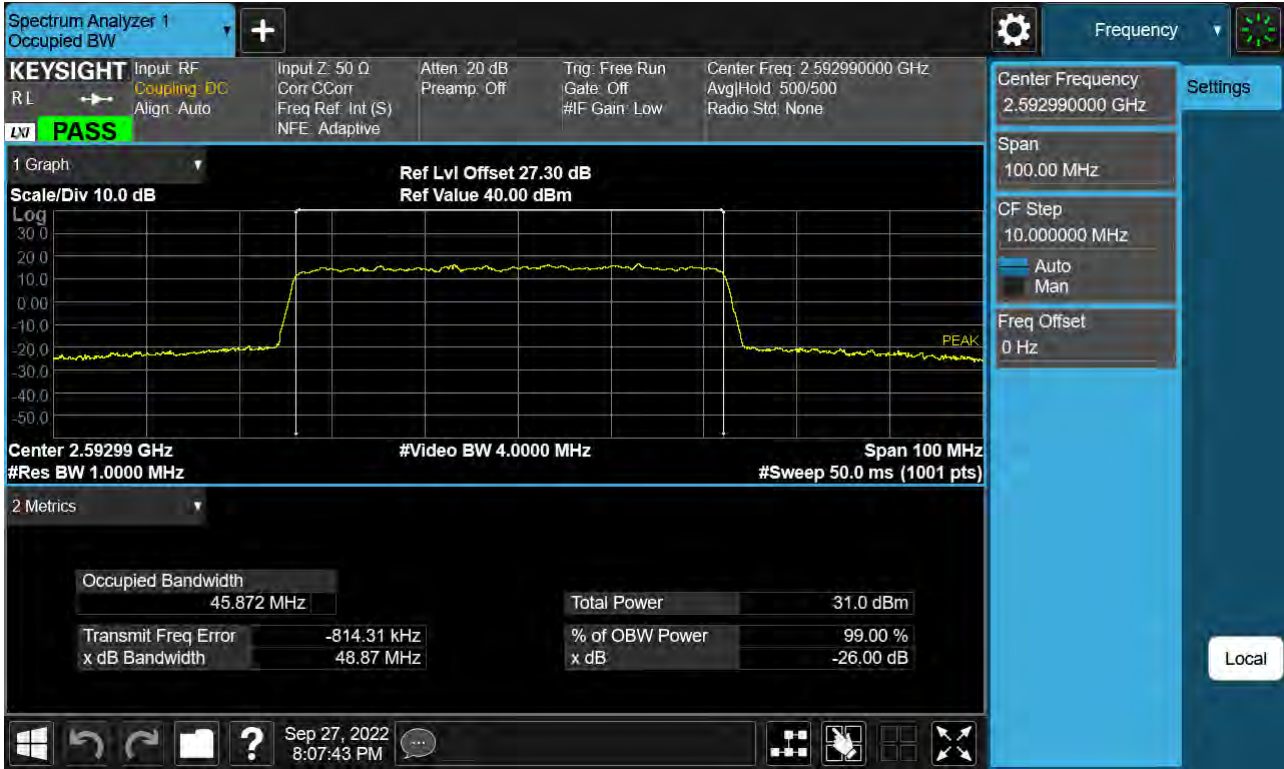


Sub6 n41. Occupied Bandwidth Plot (60 MHz Ch.518598 BPSK )

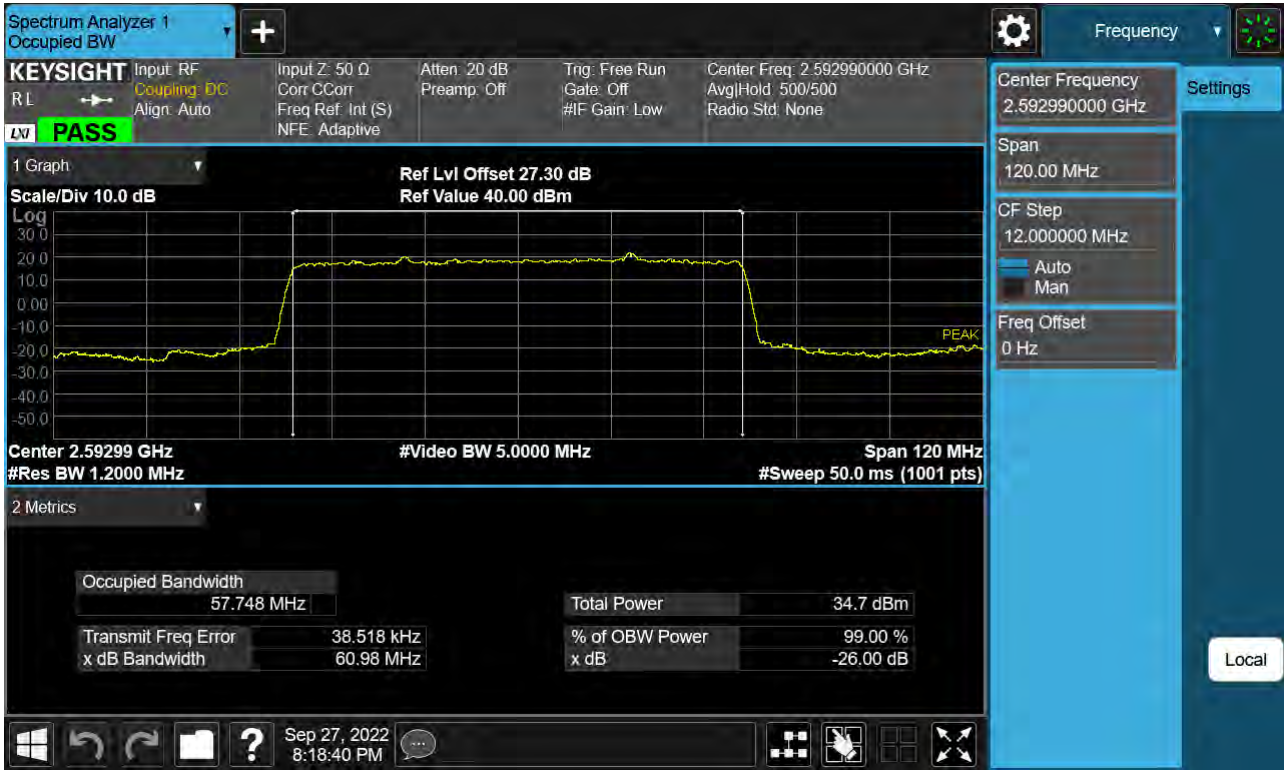


Sub6 n41. Occupied Bandwidth Plot (60 MHz Ch.518598 QPSK )

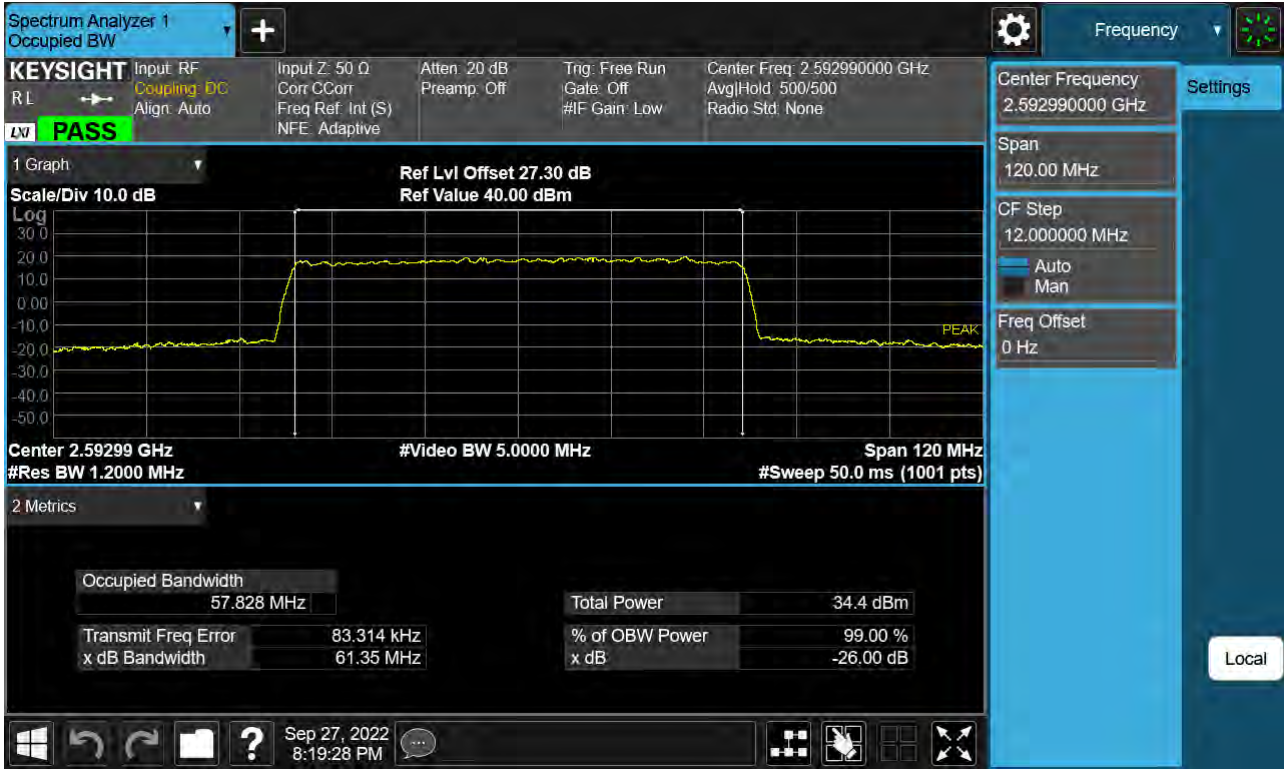


Sub6 n41. Occupied Bandwidth Plot (60 MHz Ch.518598 16-QAM )

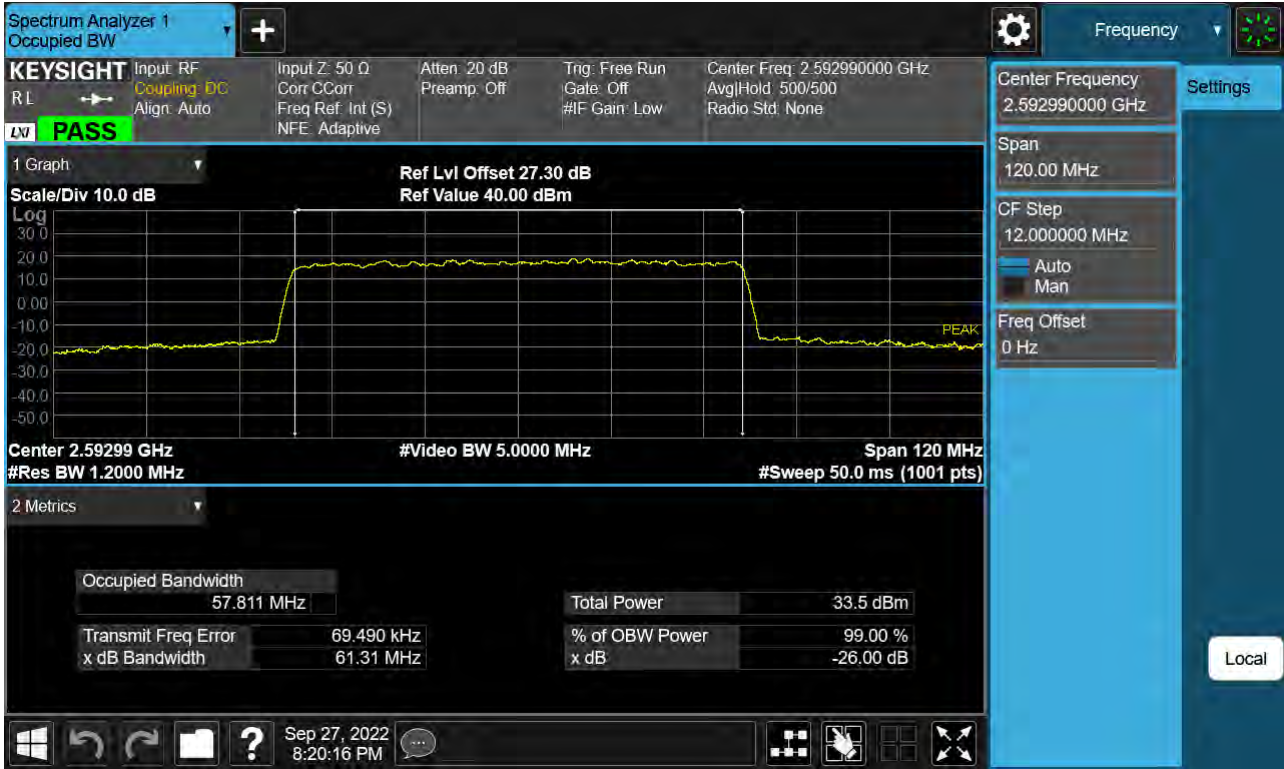

Sub6 n41. Occupied Bandwidth Plot (60 MHz Ch.518598 64-QAM )

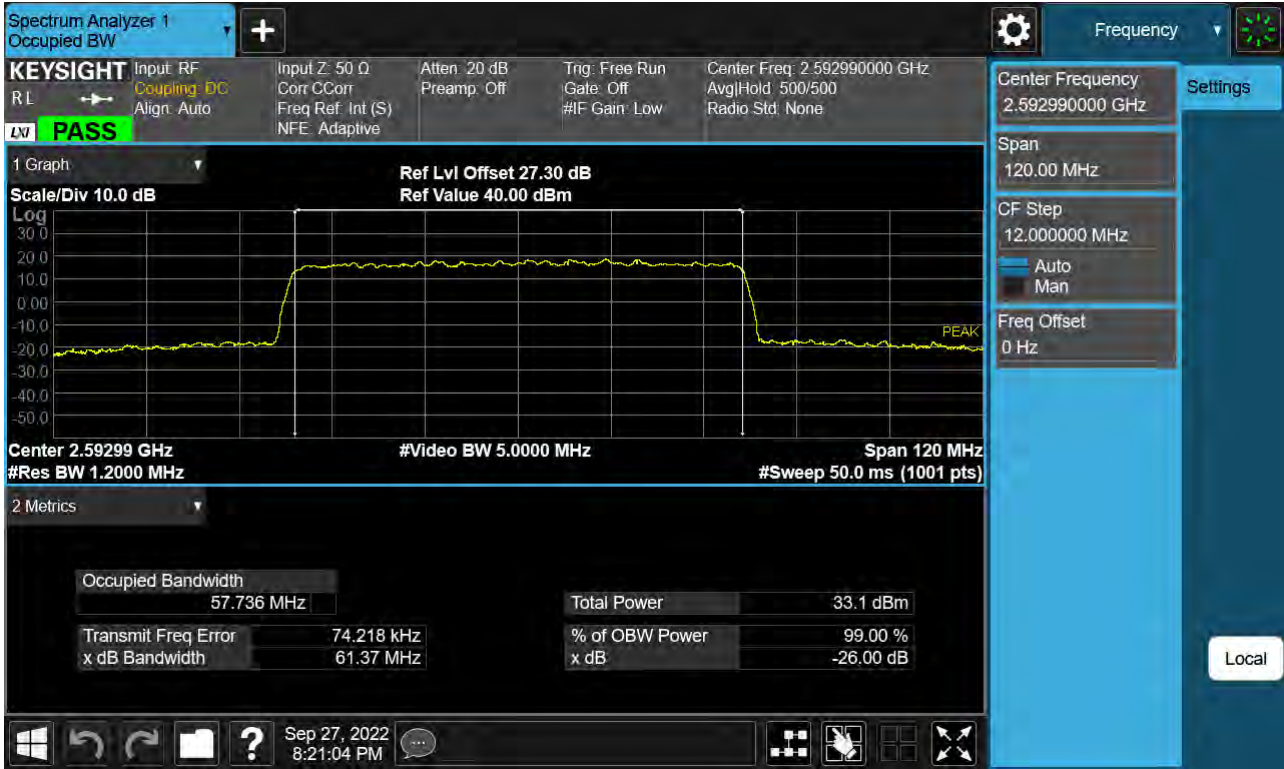

Sub6 n41. Occupied Bandwidth Plot (60 MHz Ch.518598 256-QAM )

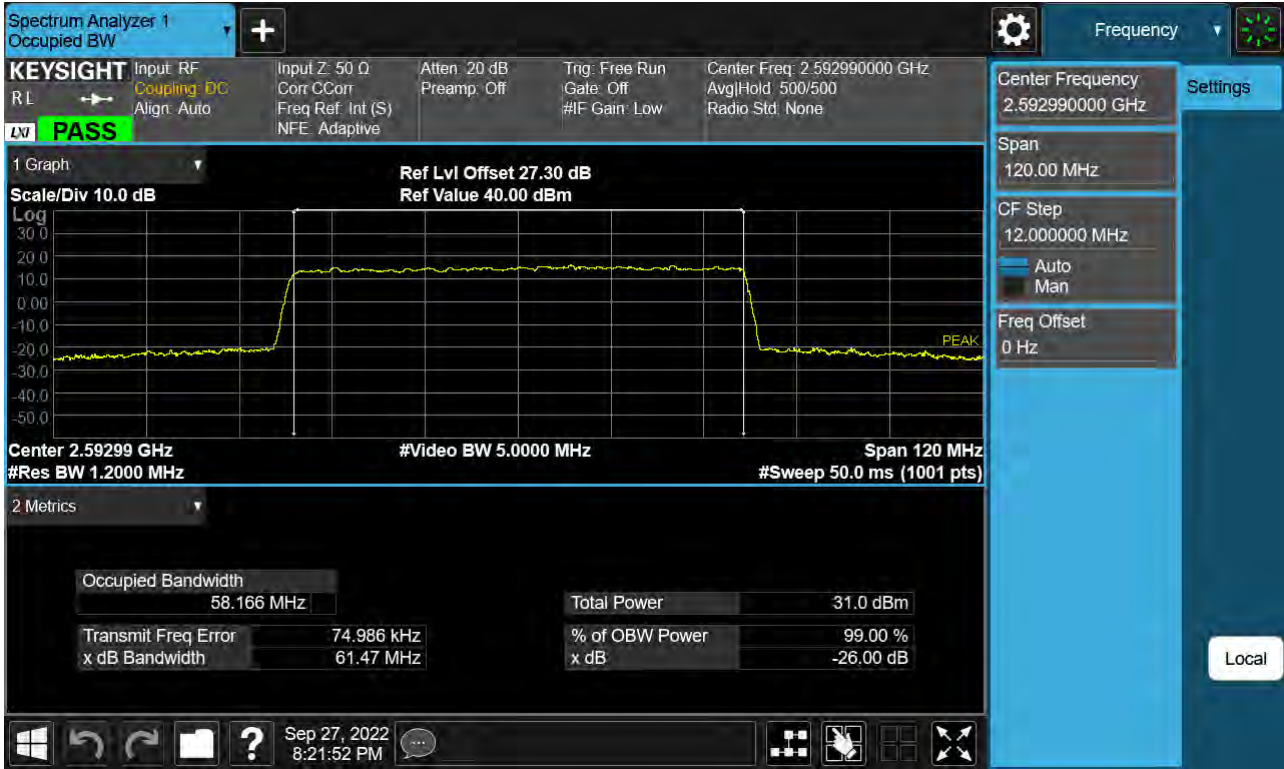


Sub6 n41. Occupied Bandwidth Plot (70 MHz Ch.518598 BPSK )






Sub6 n41. Occupied Bandwidth Plot (70 MHz Ch.518598 QPSK )

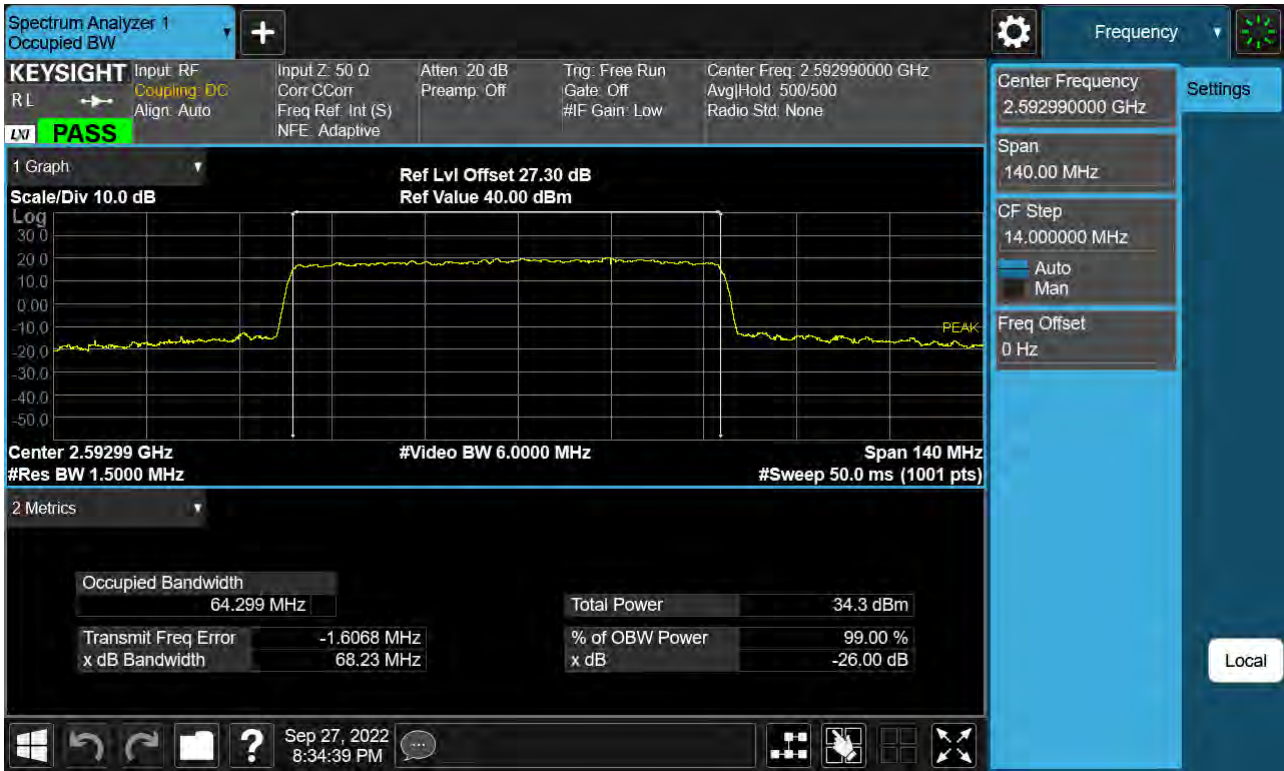


Sub6 n41. Occupied Bandwidth Plot (70 MHz Ch.518598 16-QAM )

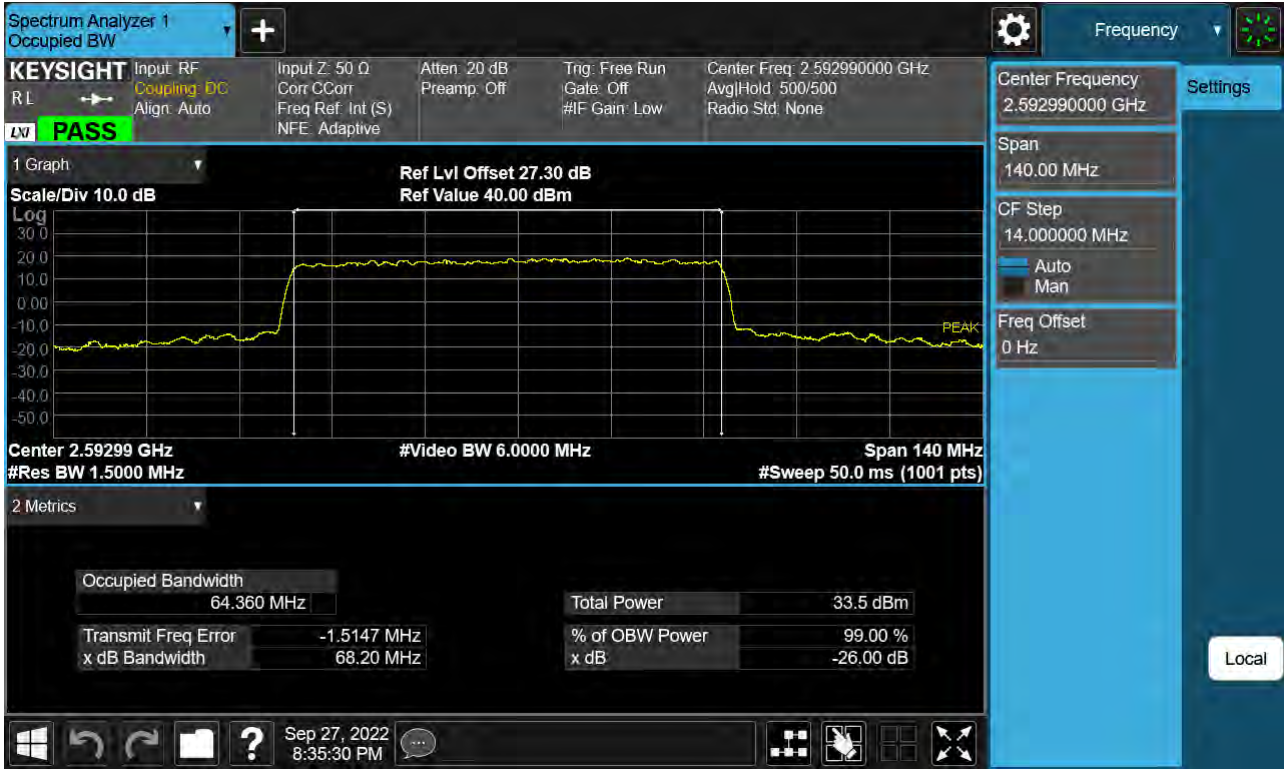


Sub6 n41. Occupied Bandwidth Plot (70 MHz Ch.518598 64-QAM )




Sub6 n41. Occupied Bandwidth Plot (70 MHz Ch.518598 256-QAM )

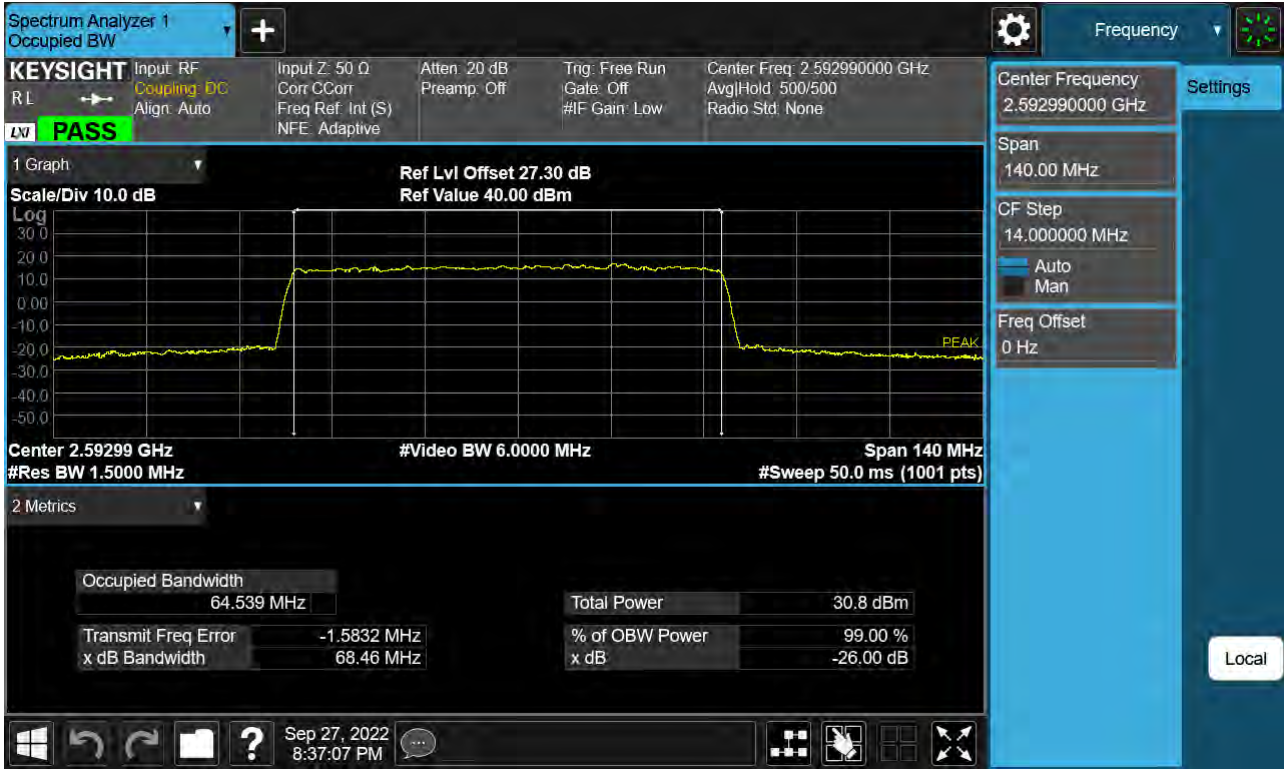


Sub6 n41. Occupied Bandwidth Plot (80 MHz Ch.518598 BPSK )

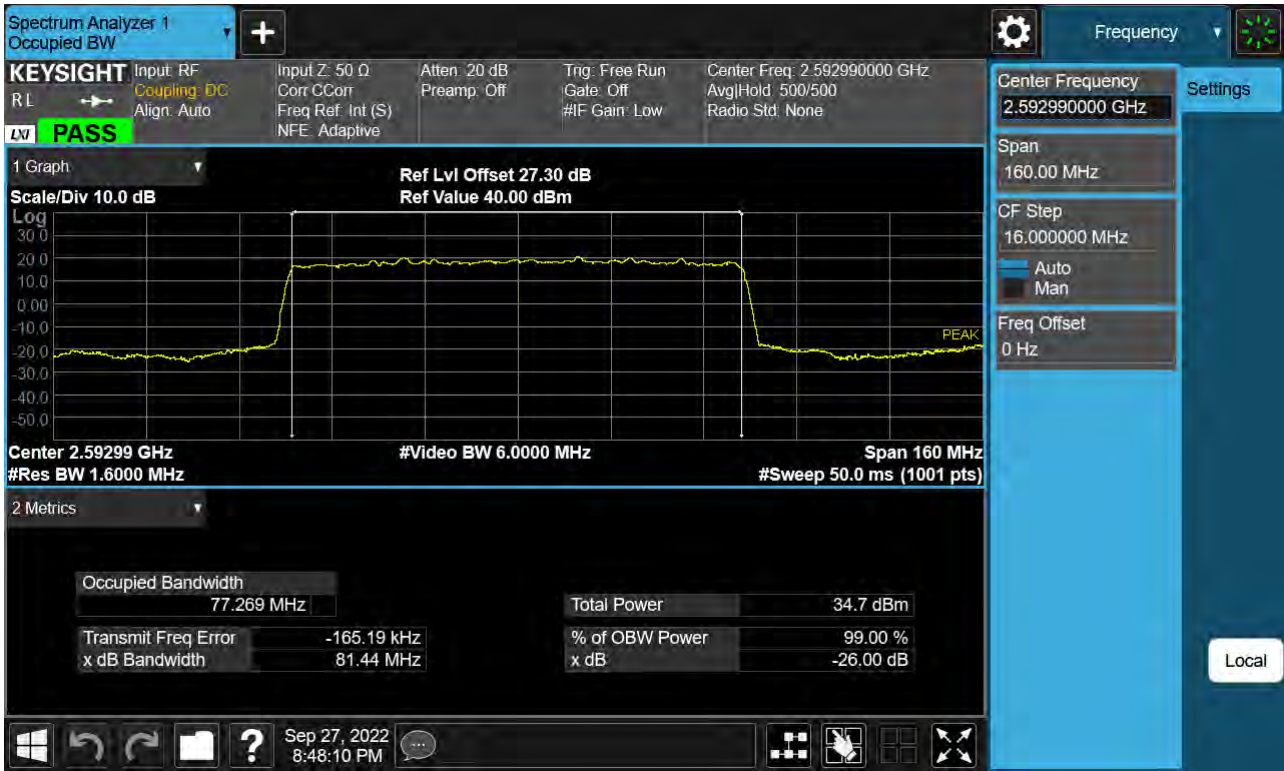


Sub6 n41. Occupied Bandwidth Plot (80 MHz Ch.518598 QPSK )

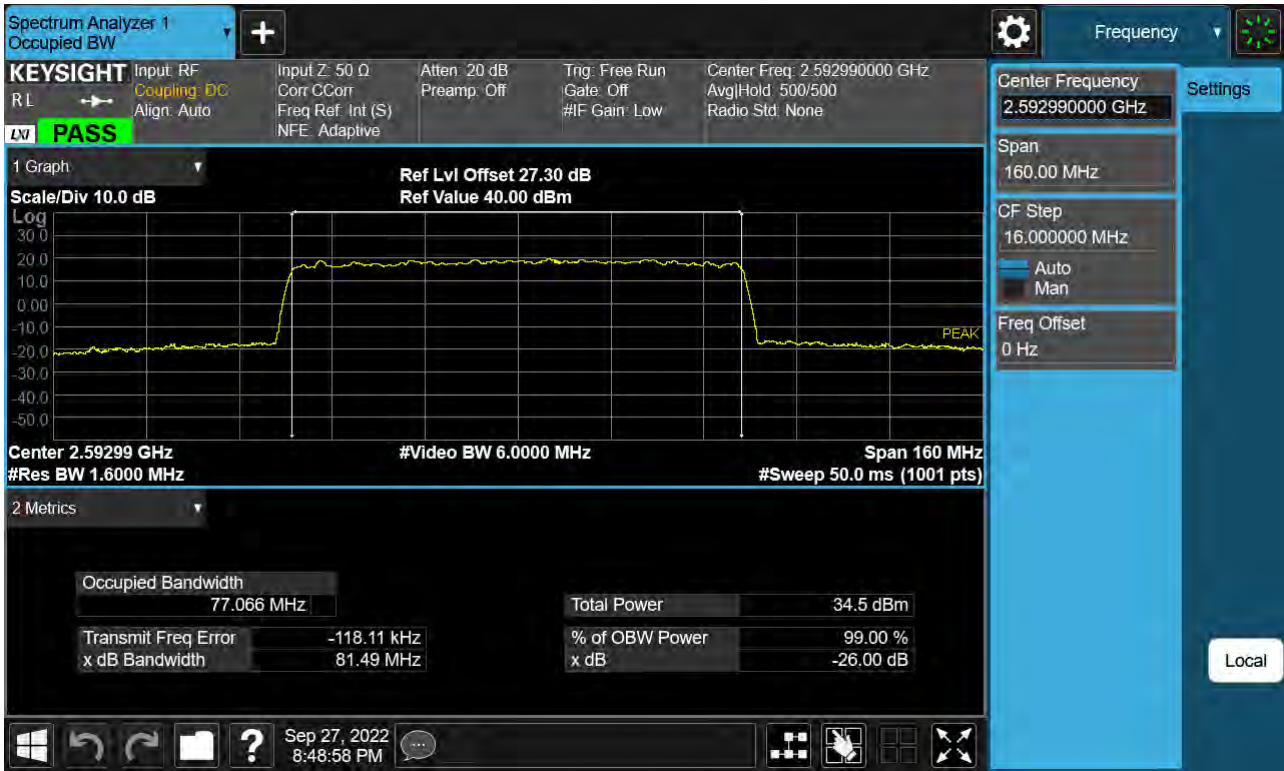

Sub6 n41. Occupied Bandwidth Plot (80 MHz Ch.518598 16-QAM )

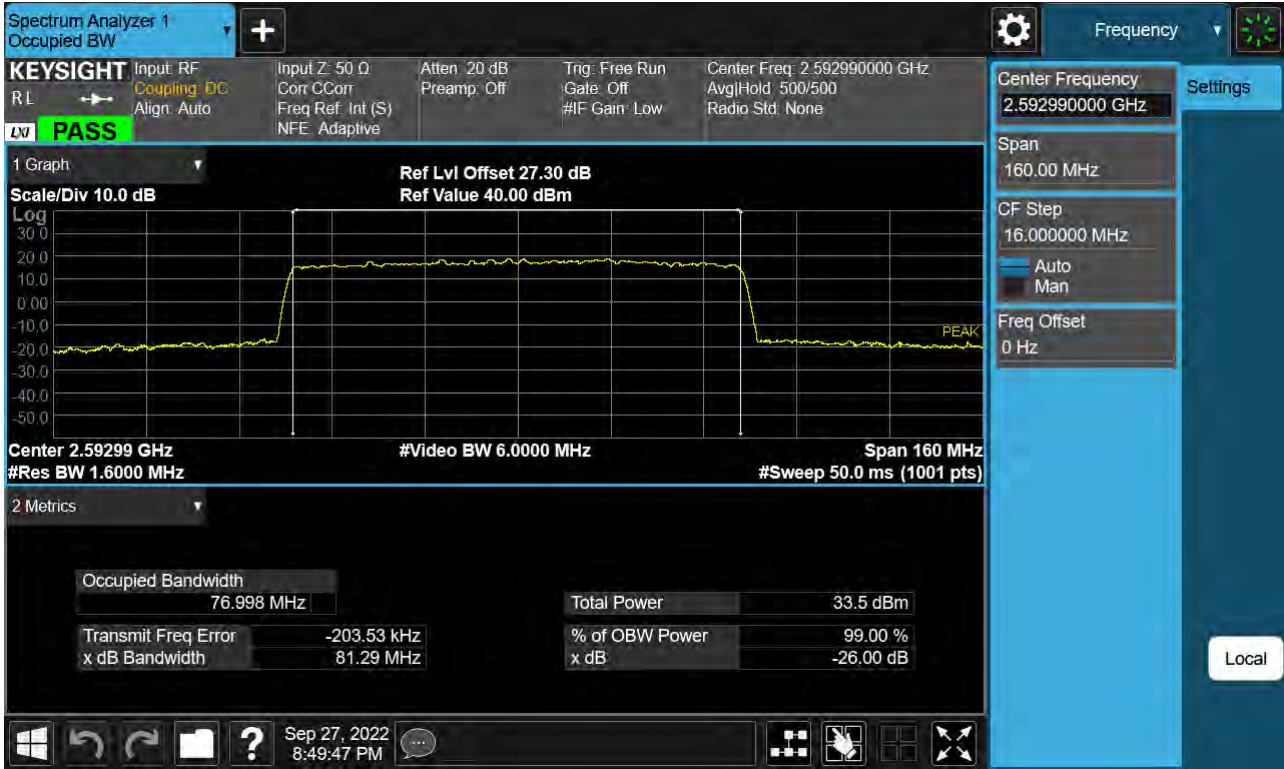


Sub6 n41. Occupied Bandwidth Plot (80 MHz Ch.518598 64-QAM )

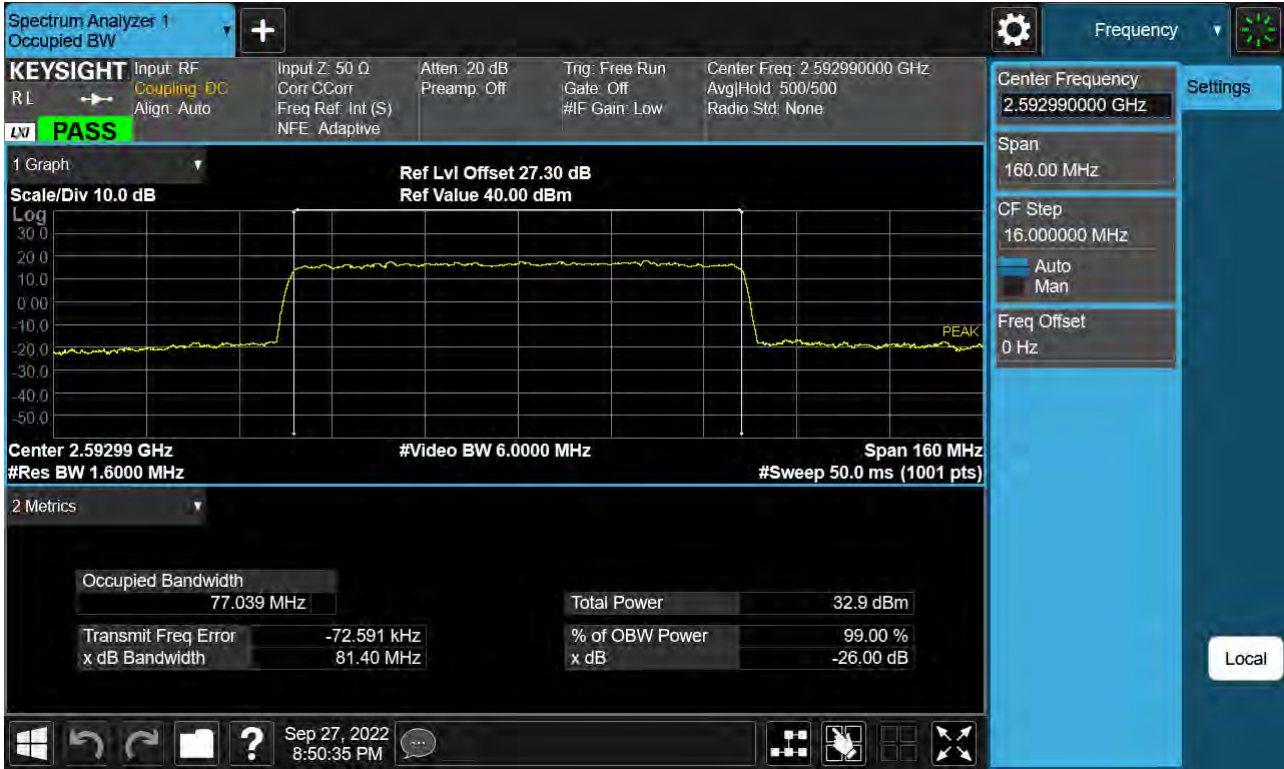





Sub6 n41. Occupied Bandwidth Plot (80 MHz Ch.518598 256-QAM )

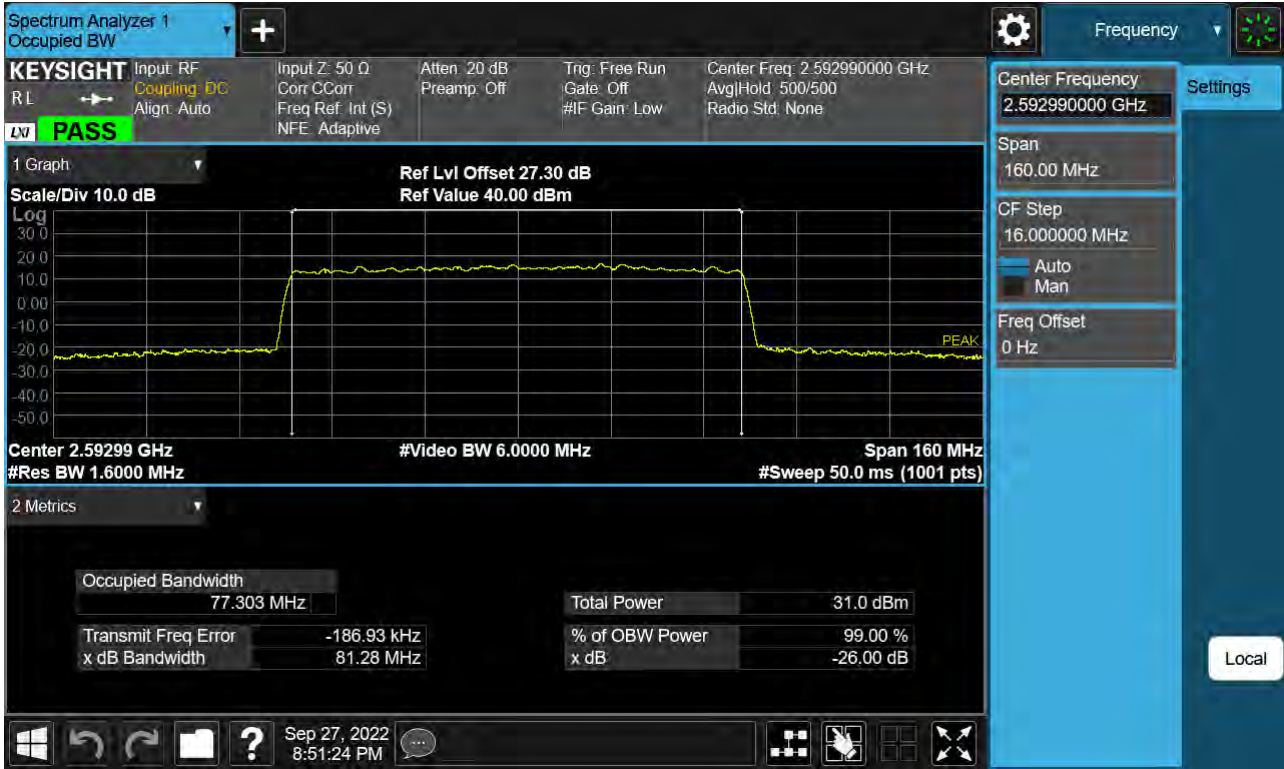


Sub6 n41. Occupied Bandwidth Plot (90 MHz Ch.518598 BPSK )

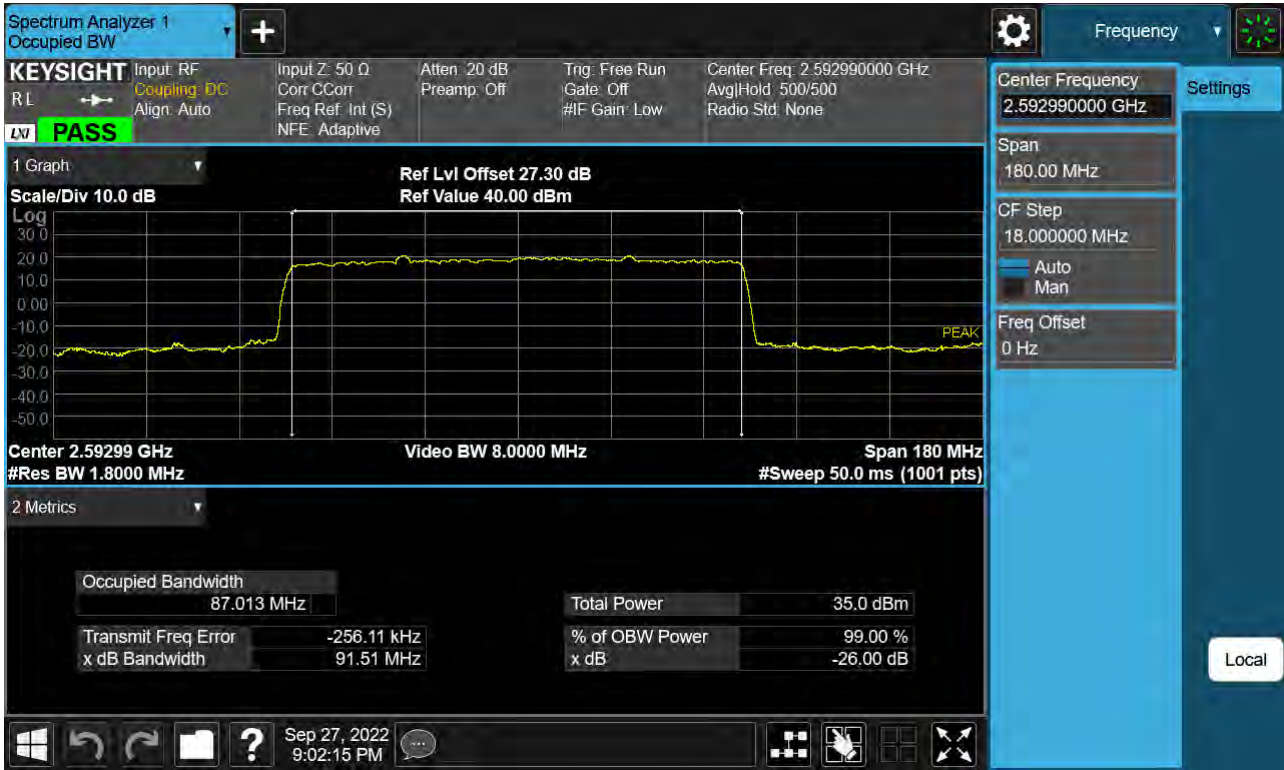


Sub6 n41. Occupied Bandwidth Plot (90 MHz Ch.518598 QPSK )

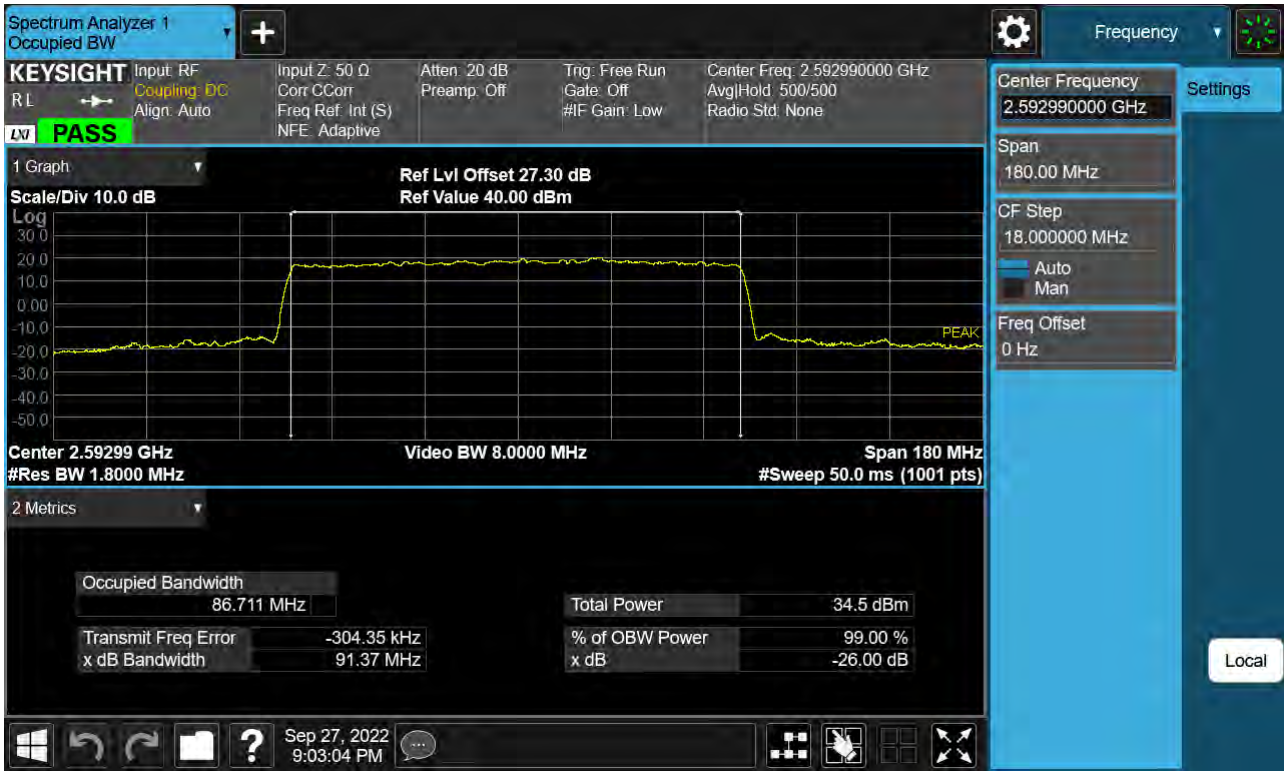


Sub6 n41. Occupied Bandwidth Plot (90 MHz Ch.518598 16-QAM )

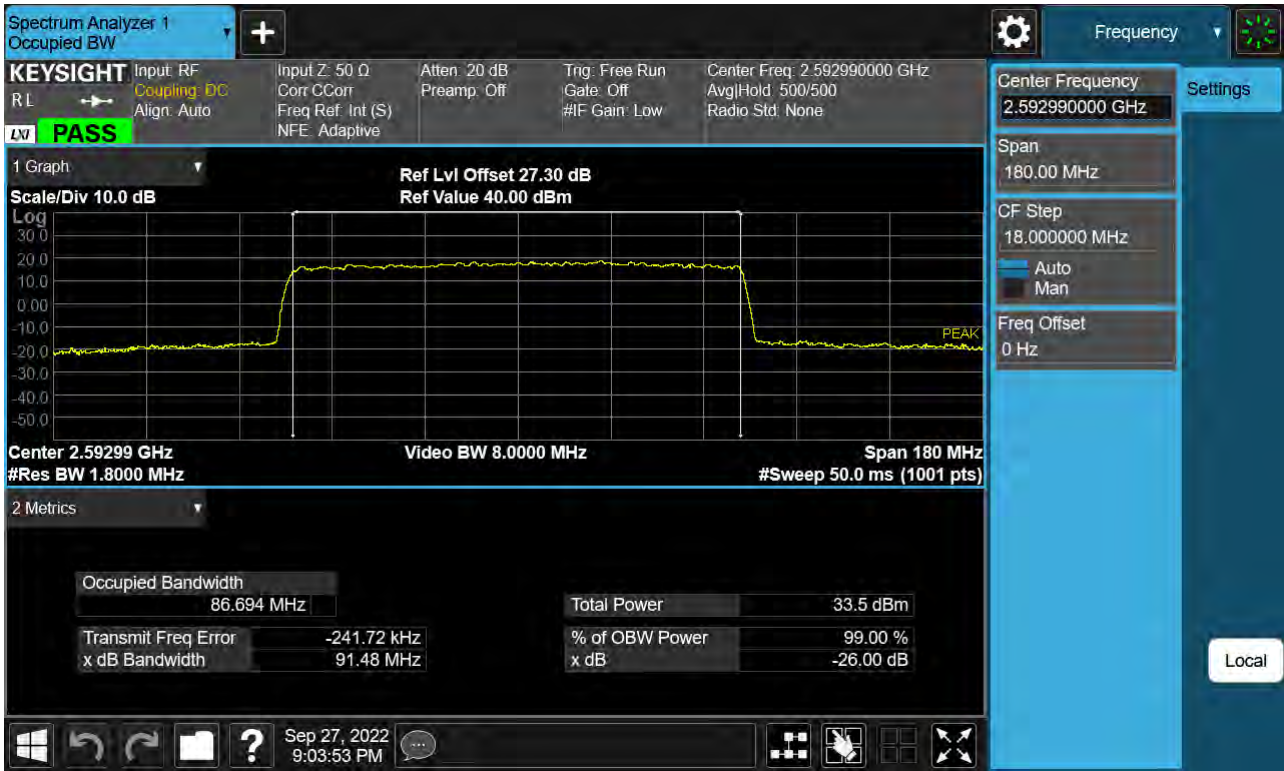


Sub6 n41. Occupied Bandwidth Plot (90 MHz Ch.518598 64-QAM )

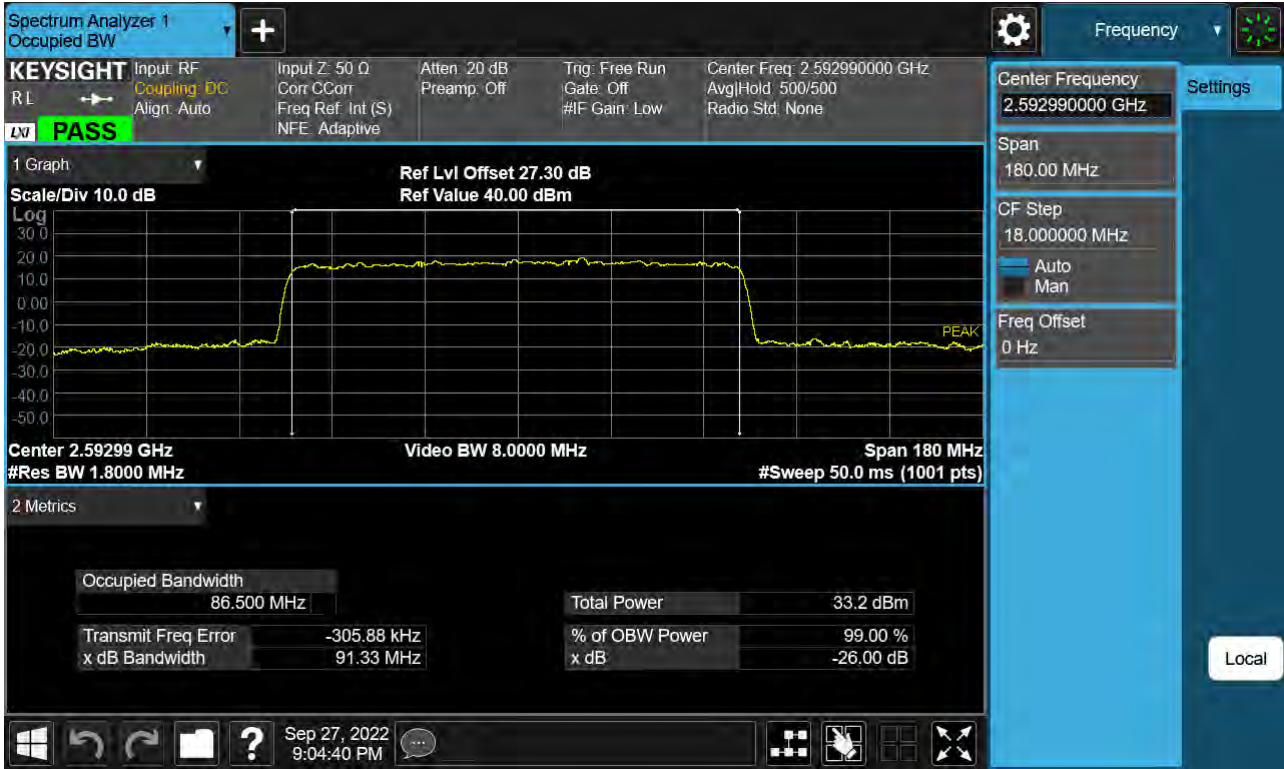

Sub6 n41. Occupied Bandwidth Plot (90 MHz Ch.518598 256-QAM )

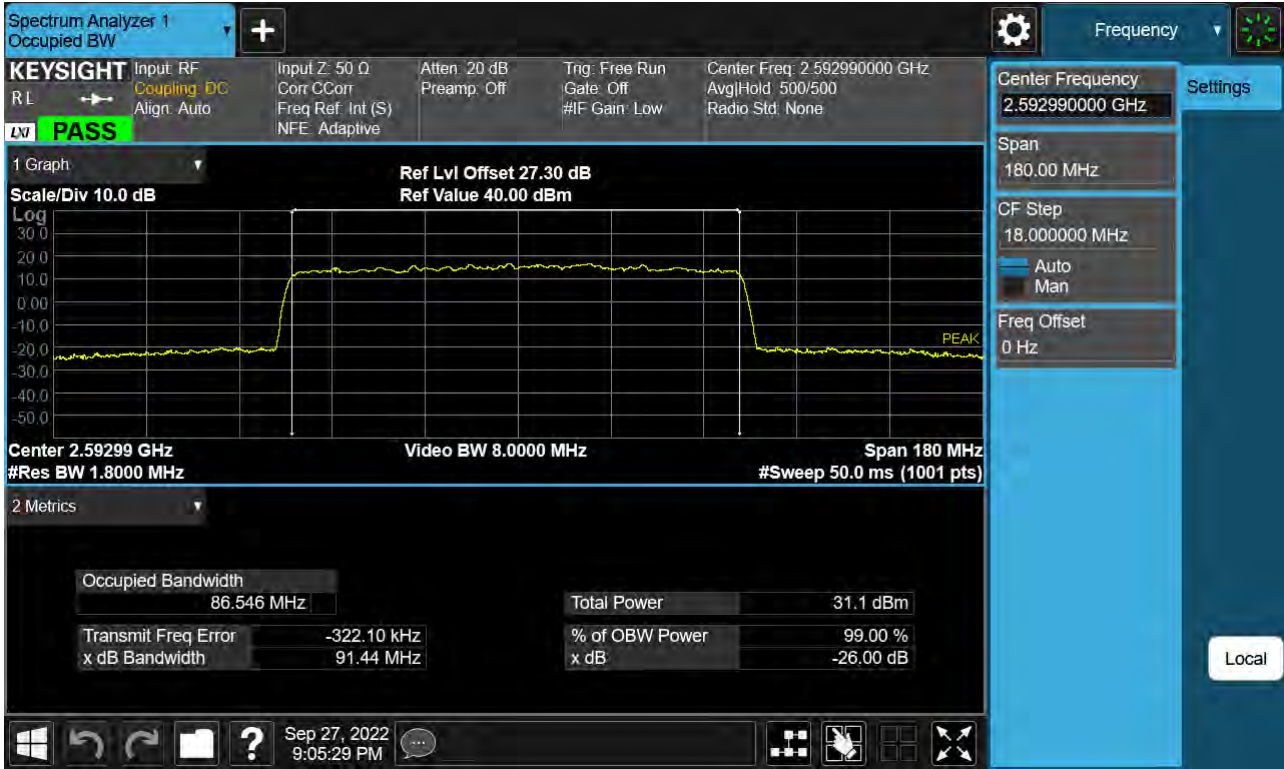

Sub6 n41. Occupied Bandwidth Plot (100 MHz Ch.518598 BPSK )

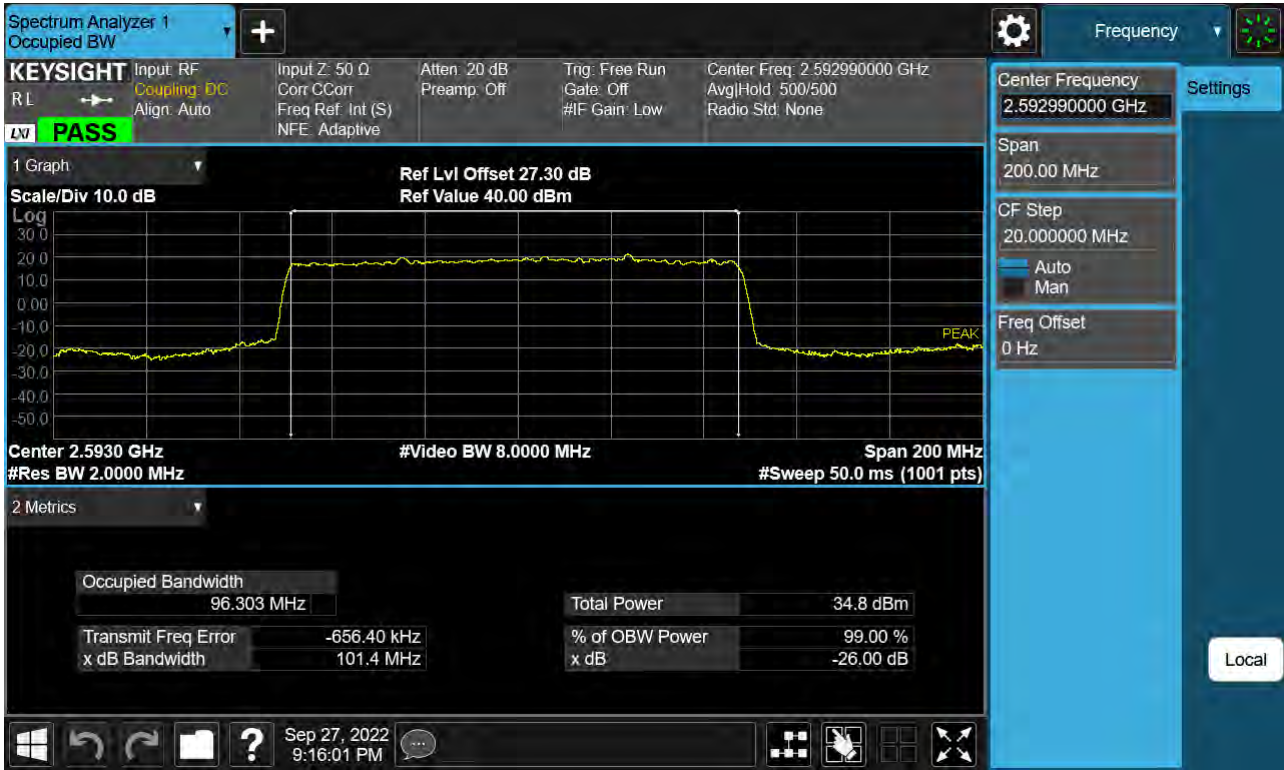


Sub6 n41. Occupied Bandwidth Plot (100 MHz Ch.518598 QPSK )






Sub6 n41. Occupied Bandwidth Plot (100 MHz Ch.518598 16-QAM )

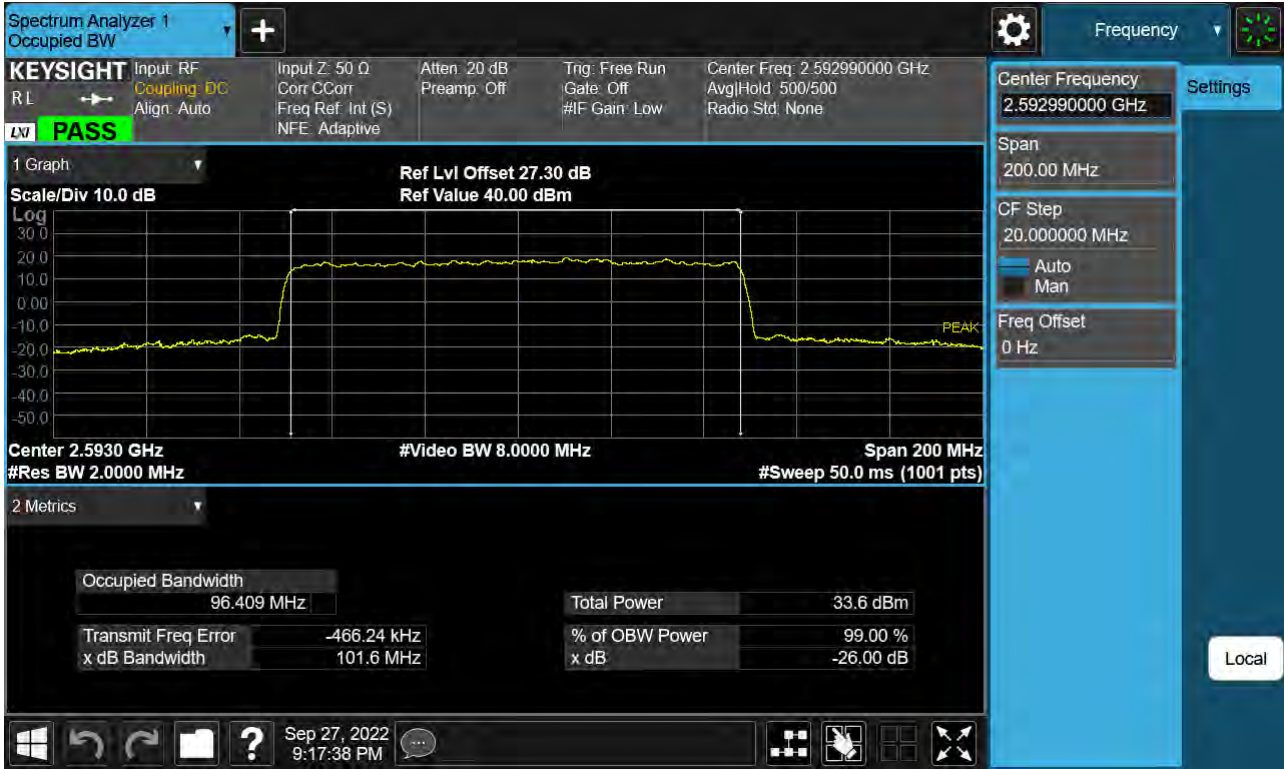


Sub6 n41. Occupied Bandwidth Plot (100 MHz Ch.518598 64-QAM )

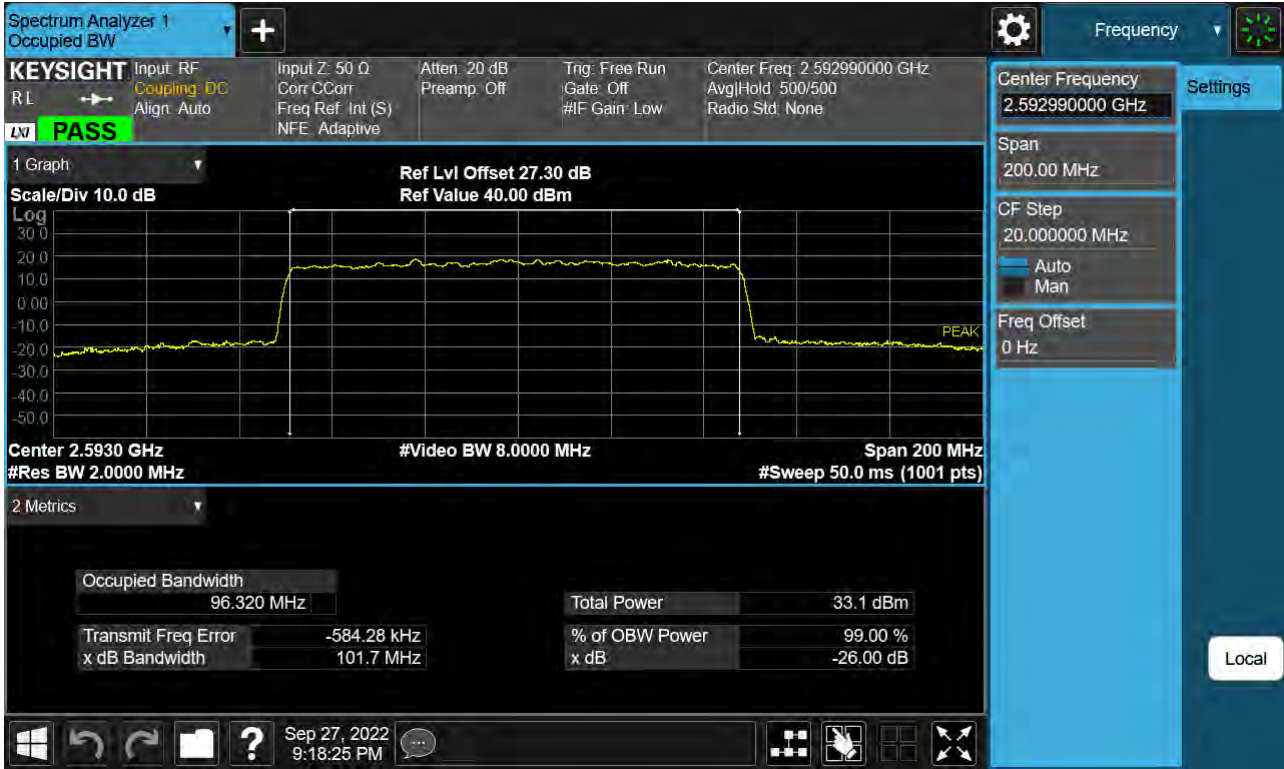

Sub6 n41. Occupied Bandwidth Plot (100 MHz Ch.518598 256-QAM )



Sub6 n41. PAR Plot (10 M BW\_Ch.518598\_BPSK)

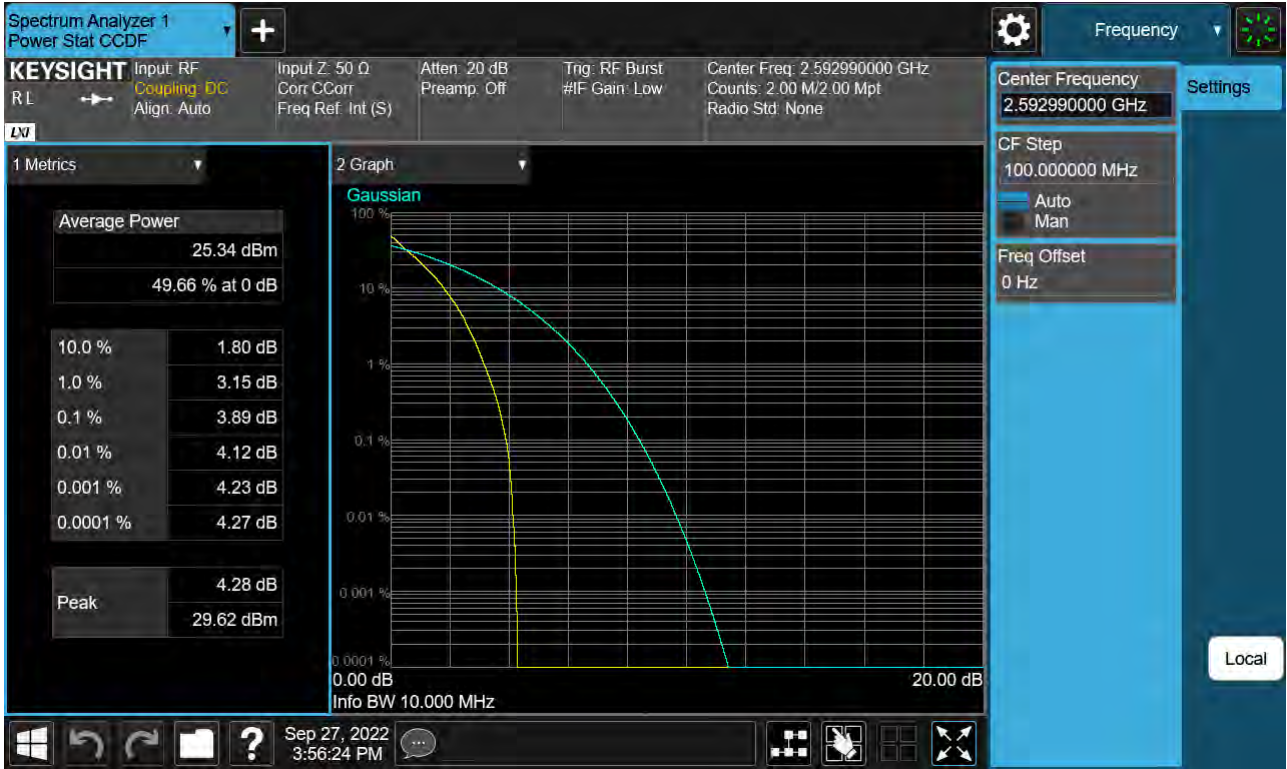

Sub6 n41. PAR Plot (10 M BW\_Ch.518598\_QPSK)



Sub6 n41. PAR Plot (10 M BW\_Ch.518598\_16QAM)



Sub6 n41. PAR Plot (10 M BW\_Ch.518598\_64QAM)




Sub6 n41. PAR Plot (10 M BW\_Ch.518598\_256QAM)






Sub6 n41. PAR Plot (15 M BW\_Ch.518598\_BPSK)

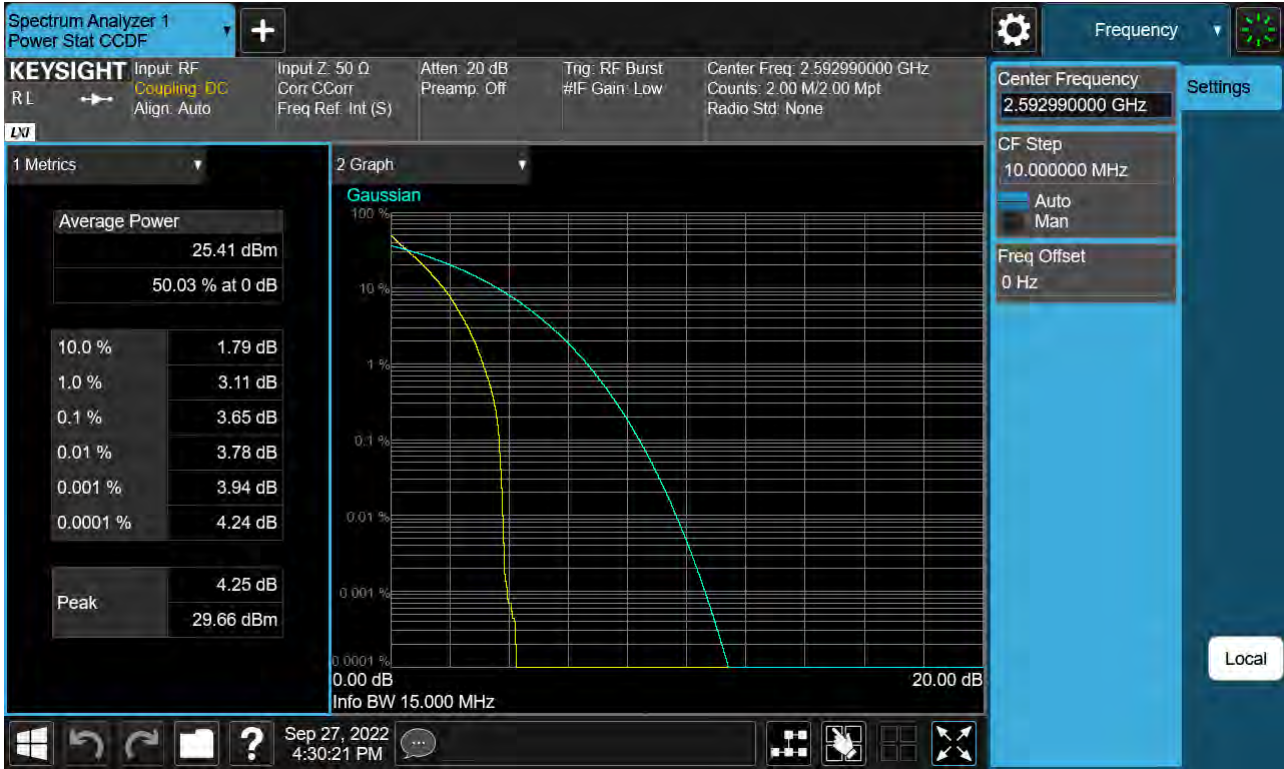

Sub6 n41. PAR Plot (15 M BW\_Ch.518598\_QPSK)




Sub6 n41. PAR Plot (15 M BW\_Ch.518598\_16QAM)

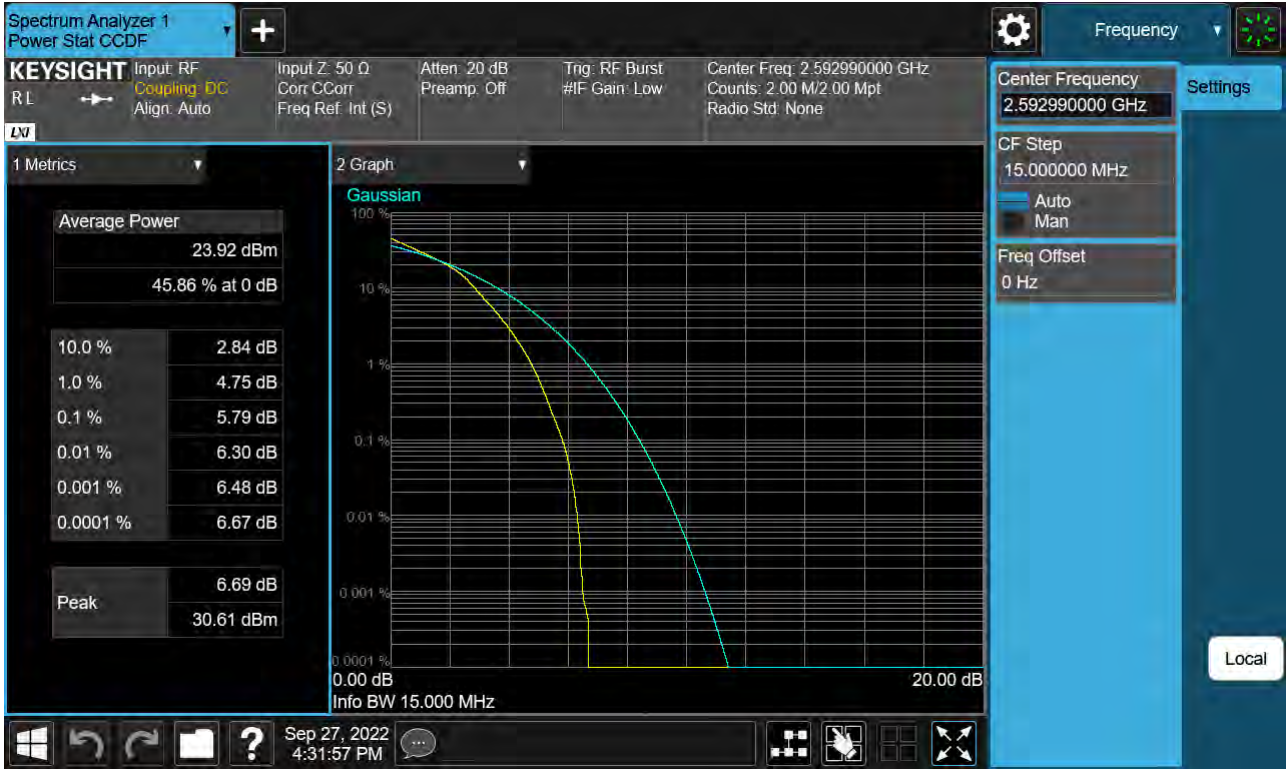


Sub6 n41. PAR Plot (15 M BW\_Ch.518598\_64QAM)




Sub6 n41. PAR Plot (15 M BW\_Ch.518598\_256QAM)

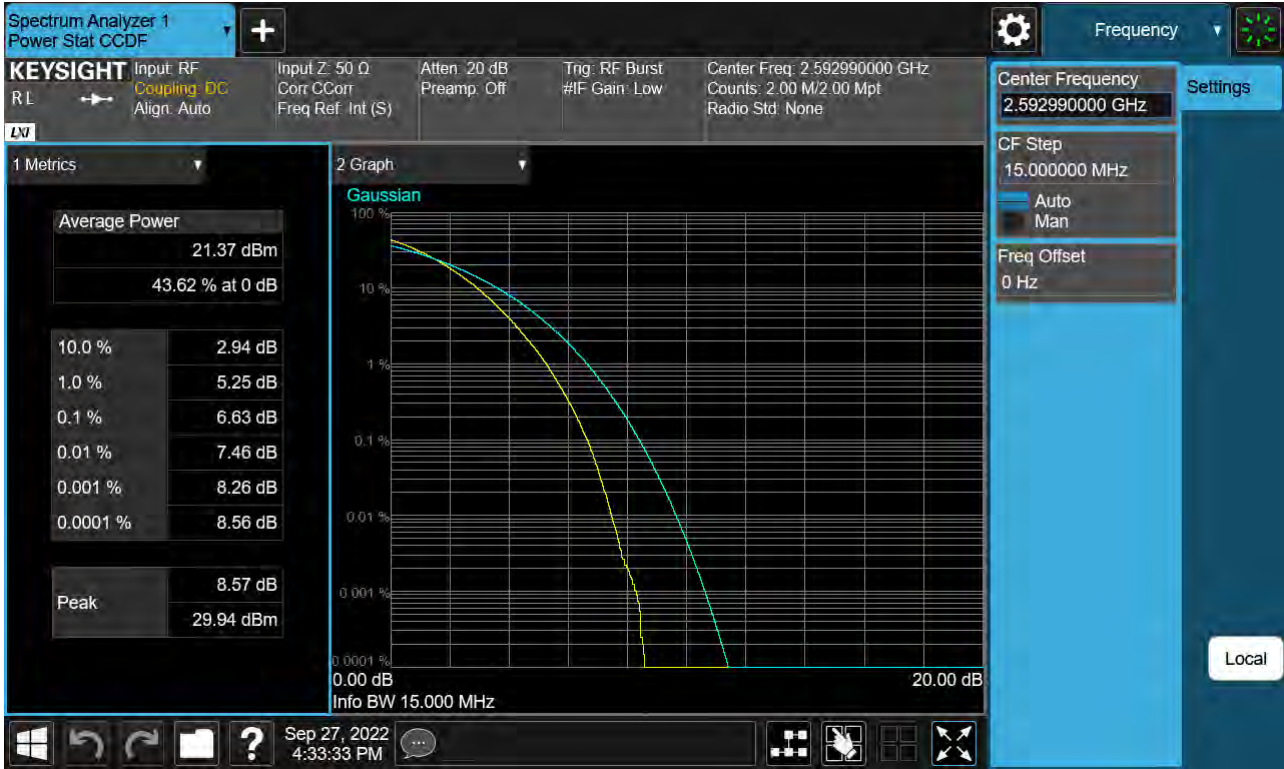


Sub6 n41. PAR Plot (20 M BW\_Ch.518598\_BPSK)

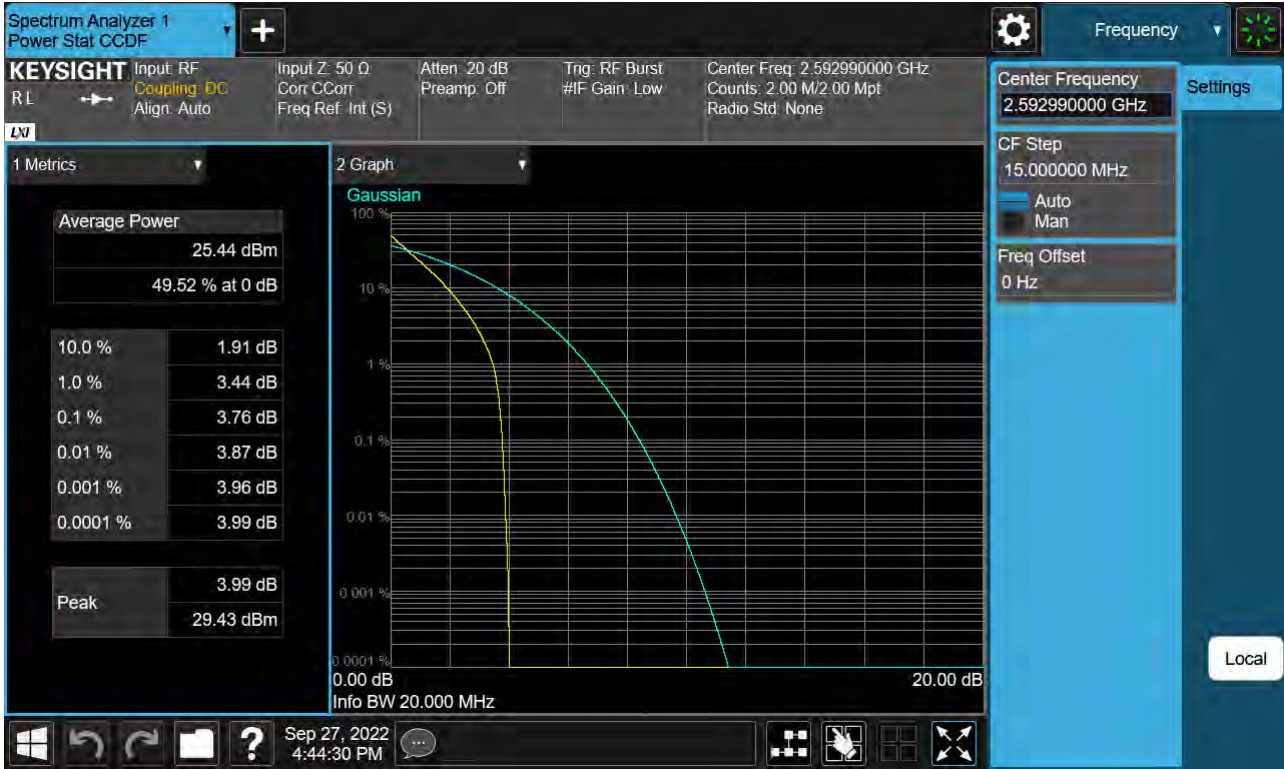

Sub6 n41. PAR Plot (20 M BW\_Ch.518598\_QPSK)

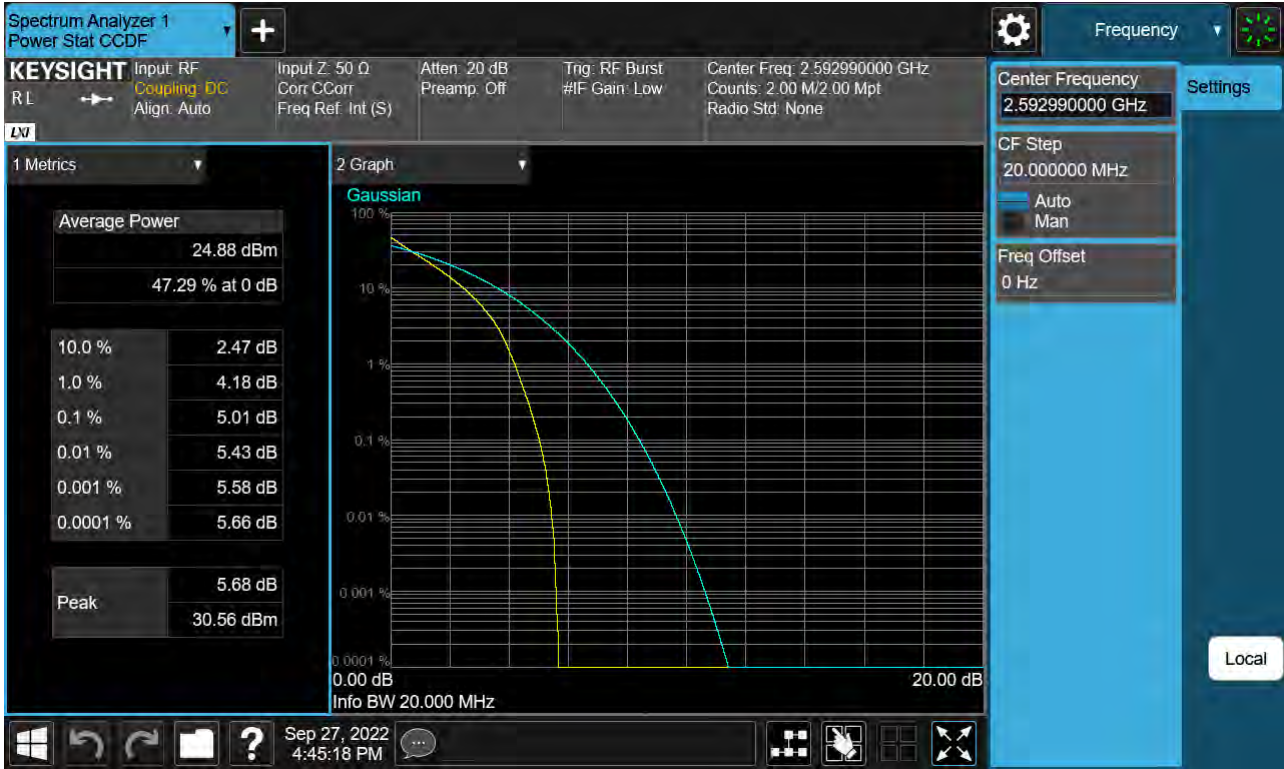

Sub6 n41. PAR Plot (20 M BW\_Ch.518598\_16QAM)

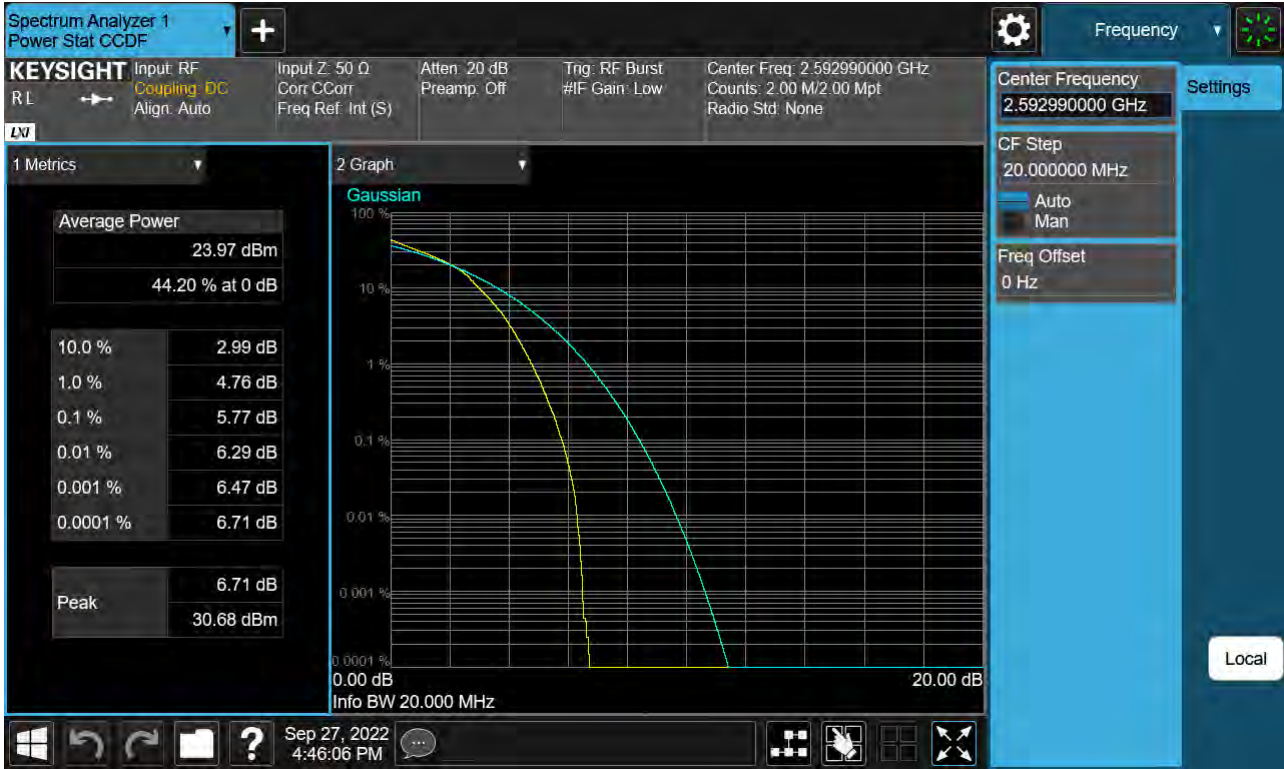





Sub6 n41. PAR Plot (20 M BW\_Ch.518598\_64QAM)




Sub6 n41. PAR Plot (20 M BW\_Ch.518598\_256QAM)

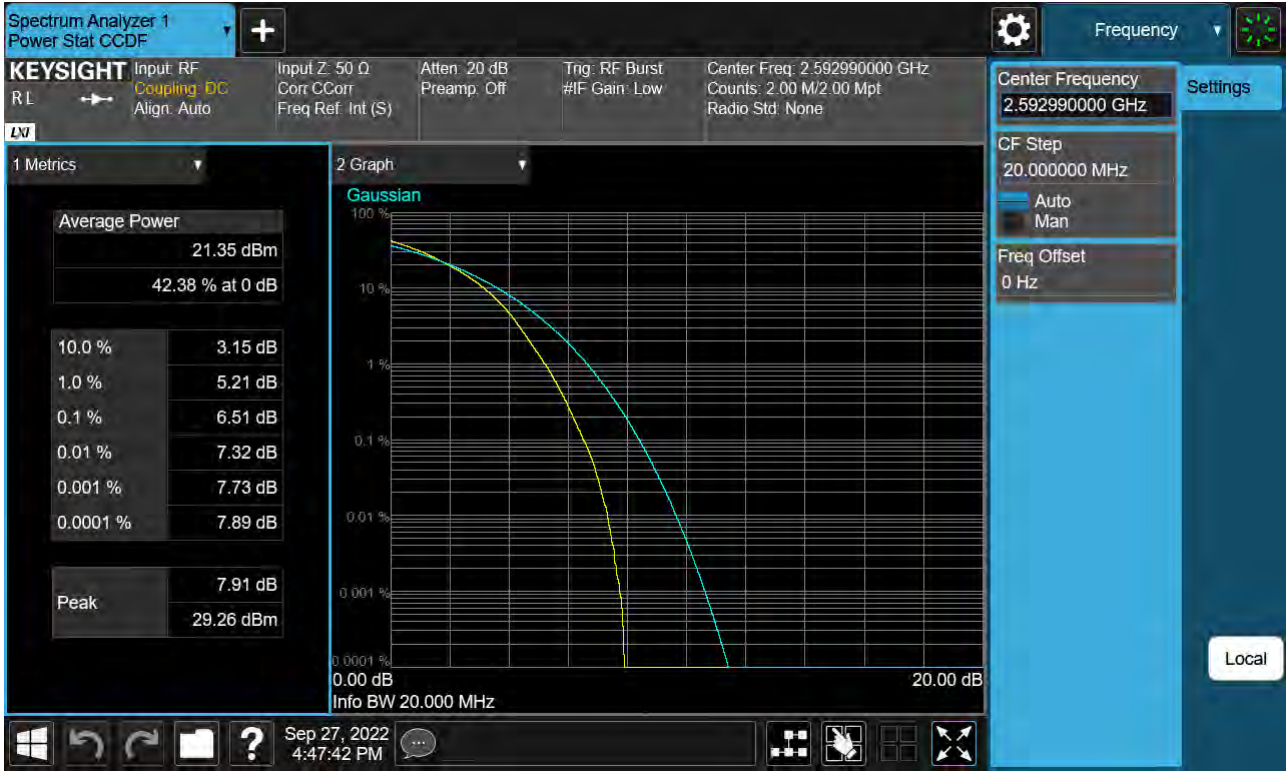

Sub6 n41. PAR Plot (30 M BW\_Ch.518598\_BPSK)

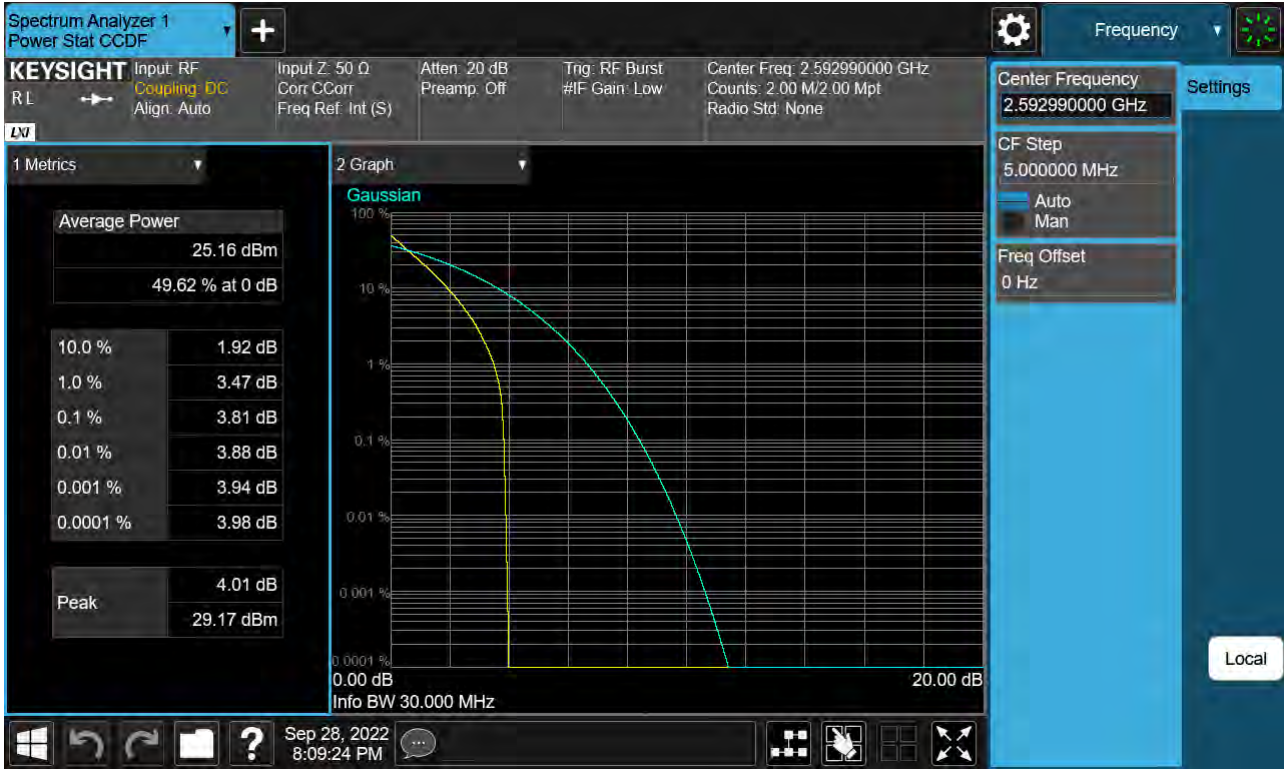

Sub6 n41. PAR Plot (30 M BW\_Ch.518598\_QPSK)

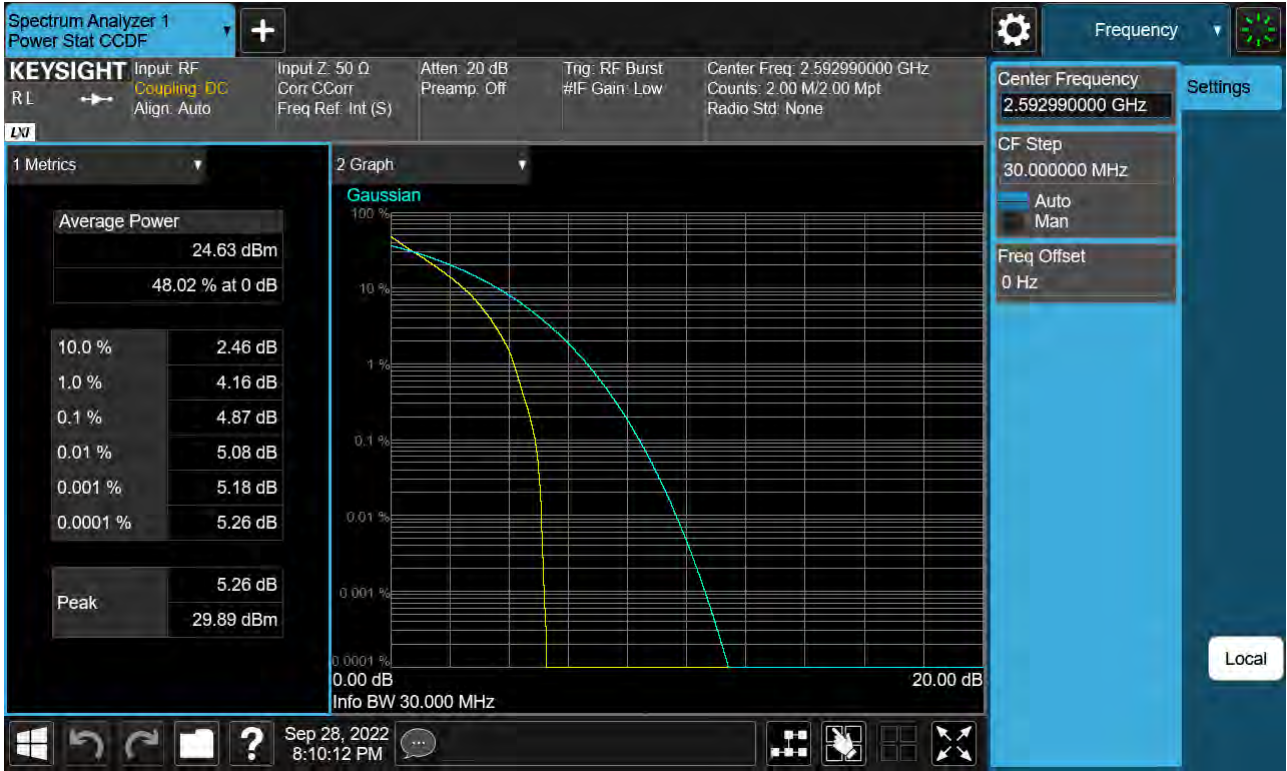


Sub6 n41. PAR Plot (30 M BW\_Ch.518598\_16QAM)



Sub6 n41. PAR Plot (30 M BW\_Ch.518598\_64QAM)



Sub6 n41. PAR Plot (30 M BW\_Ch.518598\_256QAM)

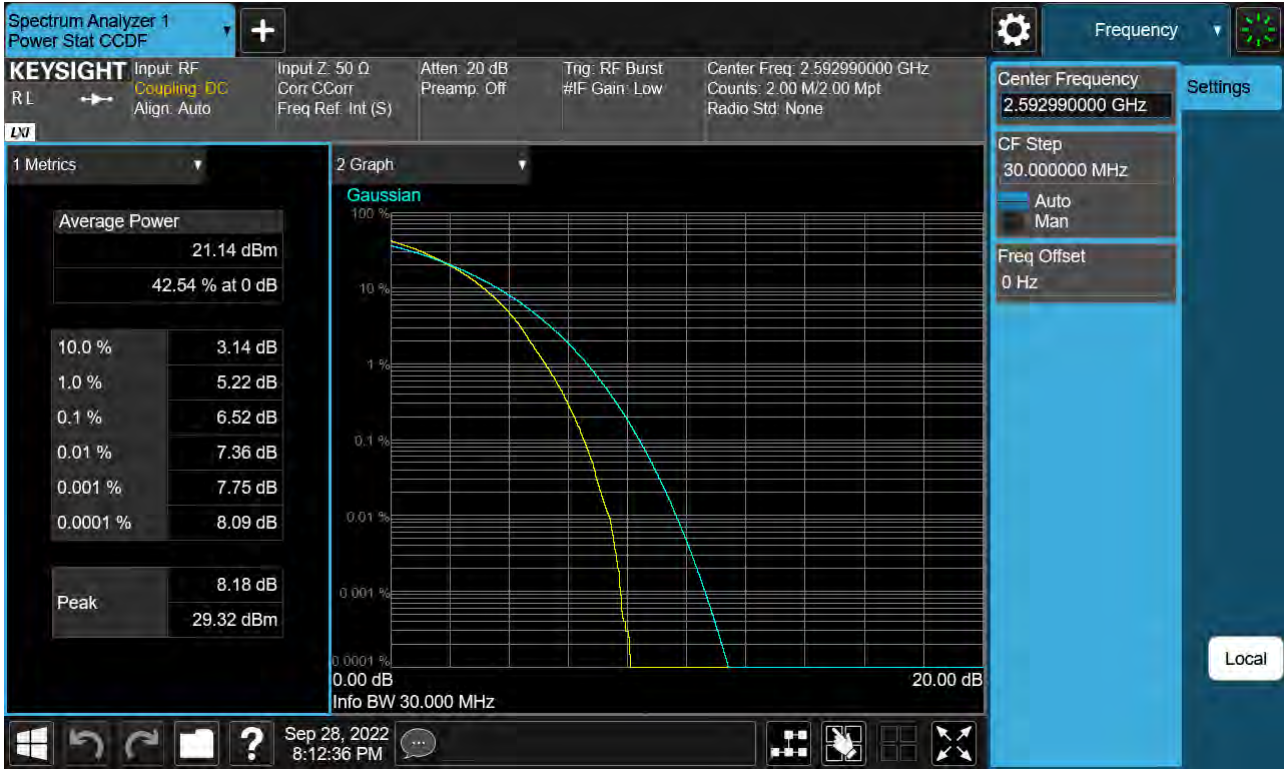

Sub6 n41. PAR Plot (40 M BW\_Ch.518598\_BPSK)





Sub6 n41. PAR Plot (40 M BW\_Ch.518598\_QPSK)



Sub6 n41. PAR Plot (40 M BW\_Ch.518598\_16QAM)



Sub6 n41. PAR Plot (40 M BW\_Ch.518598\_64QAM)



Sub6 n41. PAR Plot (40 M BW\_Ch.518598\_256QAM)



Sub6 n41. PAR Plot (50 M BW\_Ch.518598\_BPSK)



Sub6 n41. PAR Plot (50 M BW\_Ch.518598\_QPSK)



Sub6 n41. PAR Plot (50 M BW\_Ch.518598\_16QAM)



Sub6 n41. PAR Plot (50 M BW\_Ch.518598\_64QAM)






Sub6 n41. PAR Plot (50 M BW\_Ch.518598\_256QAM)



Sub6 n41. PAR Plot (60 M BW\_Ch.518598\_BPSK)

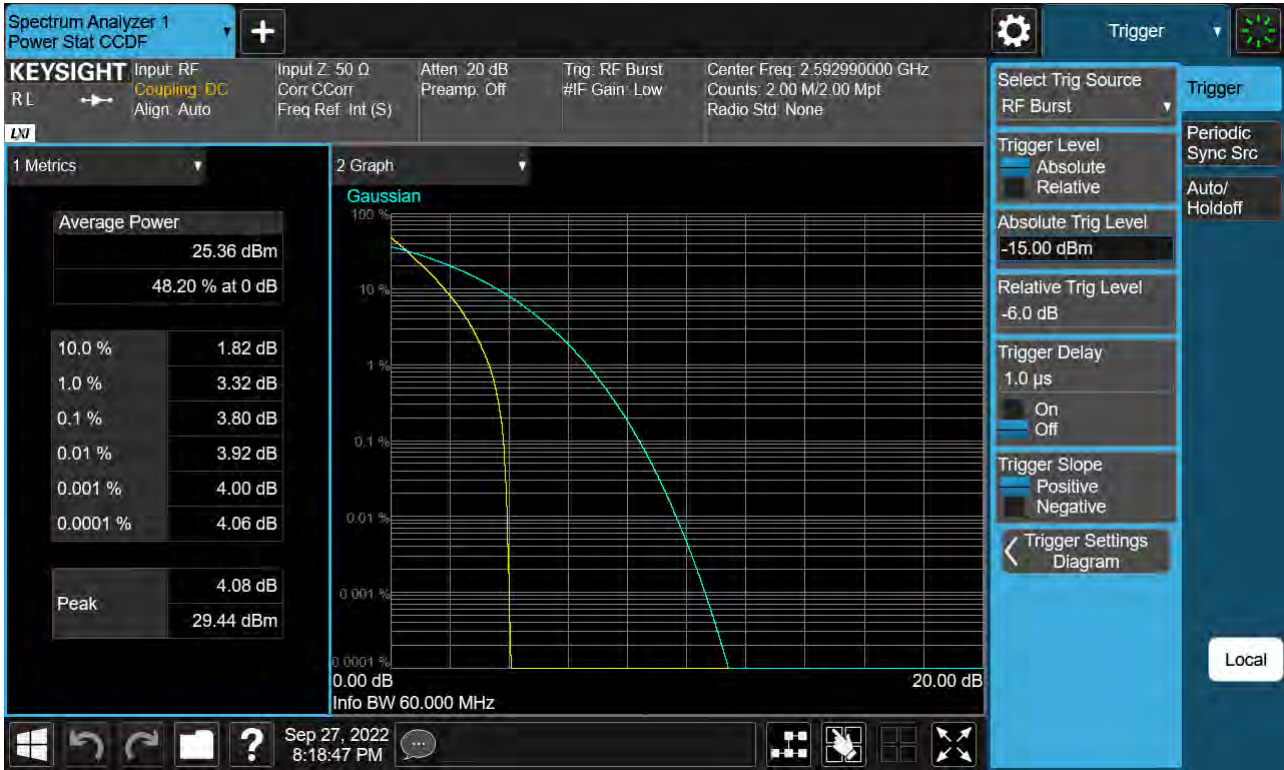

Sub6 n41. PAR Plot (60 M BW\_Ch.518598\_QPSK)



Sub6 n41. PAR Plot (60 M BW\_Ch.518598\_16QAM)



Sub6 n41. PAR Plot (60 M BW\_Ch.518598\_64QAM)



Sub6 n41. PAR Plot (60 M BW\_Ch.518598\_256QAM)



Sub6 n41. PAR Plot (70 M BW\_Ch.518598\_BPSK)



Sub6 n41. PAR Plot (70 M BW\_Ch.518598\_QPSK)





Sub6 n41. PAR Plot (70 M BW\_Ch.518598\_16QAM)

