

Part 96 MEASUREMENT REPORT

Applicant Name:
 Samsung Electronics Co., Ltd.
 129, Samsung-ro,
 Yeongtong-gu, Suwon-si
 Gyeonggi-do, 16677, Korea

Date of Testing:
 10/06/2022 - 11/23/2022
Test Report Issue Date:
 11/23/2022
Test Site/Location:
 Element lab., Columbia, MD, USA
Test Report Serial No.:
 1M2209010096-07.A3L

FCC ID:	A3LSMS911U
APPLICANT:	Samsung Electronics Co., Ltd.

Application Type: Certification
Model: SM-S911U
Additional Models: SM-S911U1
EUT Type: Portable Handset
FCC Classification: Citizens Band End User Devices (CBE)
FCC Rule Part(s): 96
Test Procedure(s): ANSI C63.26-2015, KDB 940660 D01 v03,
 WINNF-18-IN-00178 v1.0.0.00,
 WINNF-TS-0122 v1.0.2, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez
 Executive Vice President



FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 1 of 136

TABLE OF CONTENTS

1.0	INTRODUCTION	5
1.1	Scope	5
1.2	Element Test Location.....	5
1.3	Test Facility / Accreditations.....	5
2.0	PRODUCT INFORMATION.....	6
2.1	Equipment Description	6
2.2	Device Capabilities.....	6
2.3	Test Configuration	6
2.4	Software and Firmware	6
2.5	EMI Suppression Device(s)/Modifications	6
3.0	DESCRIPTION OF TESTS	7
3.1	Measurement Procedure.....	7
3.2	Radiated Power and Radiated Spurious Emissions	7
4.0	MEASUREMENT UNCERTAINTY	8
5.0	TEST EQUIPMENT CALIBRATION DATA	9
6.0	SAMPLE CALCULATIONS	10
7.0	TEST RESULTS	11
7.1	Summary.....	11
7.2	Conducted Output Power Data	13
7.3	Occupied Bandwidth	19
7.4	Spurious and Harmonic Emissions at Antenna Terminal	36
7.5	Band Edge Emissions at Antenna Terminal	75
7.6	Radiated Power (EIRP)	99
7.7	Radiated Spurious Emissions Measurements.....	104
7.8	Frequency Stability / Temperature Variation	128
7.9	End User Device Additional Requirement (CBSD Protocol).....	131
8.0	CONCLUSION.....	136

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 2 of 136

MEASUREMENT REPORT

FCC Part 96

Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
LTE Band 48 (2CC ULCA) ANT F	40 MHz	QPSK	3570.0 - 3680.0	0.112	20.48	37M6G7D
		16QAM	3570.0 - 3680.0	0.093	19.67	37M7W7D
	35 MHz	QPSK	3567.5 - 3682.5	0.110	20.43	32M8G7D
		16QAM	3567.5 - 3682.5	0.091	19.57	32M8W7D
	30 MHz	QPSK	3565.0 - 3685.0	0.109	20.36	27M9G7D
		16QAM	3565.0 - 3685.0	0.089	19.49	27M9W7D
	25 MHz	QPSK	3562.5 - 3687.5	0.112	20.49	23M0G7D
		16QAM	3562.5 - 3687.5	0.087	19.37	23M0W7D
LTE Band 48 ANT F	20 MHz	QPSK	3560.0 - 3690.0	0.119	20.74	17M9G7D
		16QAM	3560.0 - 3690.0	0.088	19.47	18M0W7D
	15 MHz	QPSK	3557.5 - 3692.5	0.119	20.75	13M6G7D
		16QAM	3557.5 - 3692.5	0.103	20.13	13M6W7D
	10 MHz	QPSK	3555.0 - 3695.0	0.123	20.91	9M04G7D
		16QAM	3555.0 - 3695.0	0.109	20.37	9M02W7D
	5 MHz	QPSK	3552.5 - 3697.5	0.122	20.85	4M54G7D
		16QAM	3552.5 - 3697.5	0.108	20.35	4M55W7D
NR Band n48 ANT F	40 MHz	$\pi/2$ BPSK	3570.0 - 3680.0	0.077	18.86	36M0G7D
		QPSK	3570.0 - 3680.0	0.077	18.88	38M0G7D
		16QAM	3570.0 - 3680.0	0.056	17.46	38M0W7D
	30 MHz	$\pi/2$ BPSK	3565.0 - 3685.0	0.075	18.77	27M0G7D
		QPSK	3565.0 - 3685.0	0.076	18.79	27M9G7D
		16QAM	3565.0 - 3685.0	0.028	14.54	28M1W7D
	20 MHz	$\pi/2$ BPSK	3560.0 - 3690.0	0.081	19.09	18M0G7D
		QPSK	3560.0 - 3690.0	0.083	19.19	18M3G7D
		16QAM	3560.0 - 3690.0	0.039	15.92	18M3W7D
	15 MHz	$\pi/2$ BPSK	3557.5 - 3692.5	0.084	19.23	13M0G7D
		QPSK	3557.5 - 3692.5	0.070	18.43	13M7G7D
		16QAM	3557.5 - 3692.5	0.048	16.83	13M6W7D
10 MHz	$\pi/2$ BPSK	3555.0 - 3695.0	0.080	19.01	8M62G7D	
	QPSK	3555.0 - 3695.0	0.069	18.41	8M66G7D	
	16QAM	3555.0 - 3695.0	0.038	15.85	8M68W7D	

EUT Overview

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 3 of 136



Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP	
				Max. Power [W]	Max. Power [dBm]
NR Band n48 Ant C	40 MHz	$\pi/2$ BPSK	3570.0 - 3680.0	0.019	12.79
		QPSK	3570.0 - 3680.0	0.019	12.73
		16QAM	3570.0 - 3680.0	0.017	12.41
NR Band n48 Ant I	40 MHz	$\pi/2$ BPSK	3570.0 - 3680.0	0.046	16.60
		QPSK	3570.0 - 3680.0	0.043	16.29
		16QAM	3570.0 - 3680.0	0.038	15.75
NR Band n48 ANT D	40 MHz	$\pi/2$ BPSK	3570.0 - 3680.0	0.013	11.04
		QPSK	3570.0 - 3680.0	0.013	11.11
		16QAM	3570.0 - 3680.0	0.011	10.44

EUT Overview

Note: EIRP levels shown in the table above are measured over the full channel bandwidth. These values will appear on the Grant of Authorization.

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 4 of 136

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

1.2 Element Test Location

These measurement tests were conducted at the Element laboratory located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is a OnGo Alliance Approved Test Lab (ATL)
- Element Washington DC LLC is a WinnForum Approved Test Lab
- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreement.

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 5 of 136

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMS911U**. The test data contained in this report pertains only to the emissions due to the EUT's LTE Band 48 operation in the CBRS band. Per FCC Part 96, this device is evaluated as a Citizens Band End User Devices (CBE).

Test Device Serial No.: 0441M, 0179M, 0441M, 0236M, 0237M, 0238M, 0241M,

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR (FR1 and FR2), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz and 6GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer

This device uses a tuner circuit that dynamically updates the antenna impedance parameters to optimize antenna performance for certain bands and modes of operation. The tuner for this device was set to simulate a "free space" condition where the transmit antenna is matched to the medium into which it is transmitting and, thus, the power is at its maximum level.

2.3 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.4 Software and Firmware

Testing was performed on device(s) using software/firmware version S911USQU0AVJM installed on the EUT.

2.5 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 6 of 136

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The measurement procedures described in the “American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services” (ANSI C63.26-2015) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI C63.26-2015. For emissions below 1GHz, a half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]};$$

where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

For radiated spurious emissions measurements, the field strength conversion method is used per the formulas in Section 5.2.7 of ANSI C63.26-2015. Field Strength (EIRP) is calculated using the following formulas:

$$E_{\text{[dB}\mu\text{V/m]}} = \text{Measured amplitude level}_{\text{[dBm]}} + 107 + \text{Cable Loss}_{\text{[dB]}} + \text{Antenna Factor}_{\text{[dB/m]}}$$

And

$$\text{EIRP}_{\text{[dBm]}} = E_{\text{[dB}\mu\text{V/m]}} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015.

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 7 of 136

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 8 of 136

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AP2-001	EMC Cable and Switch System	8/11/2022	Annual	8/11/2023	AP2-001
Agilent	N9038A	MXE EMI Receiver	1/21/2022	Annual	1/21/2023	MY51210133
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	4/13/2022	Biennial	4/13/2024	121034
EMCO	3115	Horn Antenna (1-18GHz)	8/8/2022	Biennial	8/8/2024	9704-5182
Espec	SCP-220	Temperature Chamber	5/25/2022	Biennial	5/25/2024	OCP55H0612K05
ETS-Lindgren	3117	1-18 GHz DRG Horn (Medium)	4/20/2021	Biennial	4/20/2023	125518
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	8/29/2022	Annual	8/29/2023	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	8/25/2022	Annual	8/25/2023	100348
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	12/16/2021	Annual	12/16/2022	1312.8000K67
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			112347
Sunol Sciences	JB5	Bi-Log Antenna (30M-5GHz)	8/30/2022	Biennial	8/30/2024	A051107

Table 5-1. Test Equipment

Notes:

1. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 9 of 136

6.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (7250 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 10 of 136

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMS911U
 FCC Classification: Citizens Band End User Devices (CBE)
 Mode(s): LTE/NR

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Conducted Power	2.1046(a), 2.1046(c)	N/A	PASS	Section 7.2
	Occupied Bandwidth	2.1049(h)	N/A	PASS	Section 7.3
	Conducted Band Edge / Spurious Emissions (EUD)	2.1051, 96.41(e)(ii)	-13 dBm/MHz at frequencies within 0-B MHz of channel edge (where B is the bandwidth of the assigned channel) -25 dBm/MHz at frequencies greater than B MHz above and below channel edge -40 dBm/MHz at frequencies below 3530 MHz and above 3720 MHz	PASS	Sections 7.4, 7.5
	Frequency Stability	2.1055	Fundamental emissions stay within authorized frequency block	PASS	Section 7.8
	End User Device Additional Requirements (CBSD Protocol)	96.47	End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation. An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.	PASS	Section 7.9
RADIATED	Equivalent Isotropic Radiated Power (EIRP) (EUD)	96.41(b)	23 dBm/10MHz	PASS	Section 7.6
	Radiated Spurious Emissions	2.1053, 96.41(e)	-40 dBm/MHz	PASS	Section 7.7
	Uplink Carrier Aggregation	96.41(e)	-40 dBm/MHz	PASS	Section 7.7

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is EMC Software Tool v1.1.

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 11 of 136



- 5) NR band n48 operates from four different antennas (Ant F, Ant C, Ant I, and Ant D) and the worst case mode was investigated to be Ant F. Therefore, all full tests are tested for Ant F, while Ant C, Ant I, and Ant D only include test results for their widest bandwidths.
- 6) For conducted powers it was investigated that 64QAM and 256QAM modes were lower than the measured 16QAM power due to MPR, which 64QAM and 256 QAM are excluded in the report.

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 12 of 136

7.2 Conducted Output Power Data

Test Overview

The EUT is set up to transmit at maximum power for LTE. All power levels are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

A-MPR is implemented in this device per the A-MPR specification in 3GPP TS 36.101. The conducted powers are shown herein to cover the different A-MPR levels specified in the standard. Measurement equipment was set up with triggering/gating on the spectrum analyzer such that powers were measured only during the on-time of the signal.

Test Procedure Used

ANSI C63.26-2015 – Section 5.2

Test Settings

1. Span = 2 x OBW to 3 x OBW
2. RBW = 1% to 5% of the OBW
3. Number of measurement points in sweep $\geq 2 \times \text{span} / \text{RBW}$
4. Sweep = auto-couple (less than transmission burst duration)
5. Detector = RMS (power)
6. Trigger was set to enable power measurements only on full power bursts
7. Trace was allowed to stabilize
8. Spectrum analyzer's "Channel Power" function was used to compute the power by integrating the spectrum across the OBW of the signal

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

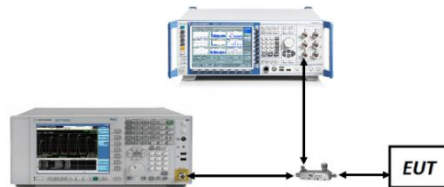


Figure 7-1. Test Instrument & Measurement Setup

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 13 of 136



Test Notes

1. A-MPR was only applied for test purposes to the 2CC case since the 1CC case was compliant for all testing at max power.
2. A-MPR was verified to comply with the "CA_NS_10" specification in the 3GPP TS 36.101 standard by setting the MCC to a U.S. code and the MNC to a U.S. carrier supporting LTE B48 operation.
3. 256QAM operations does not employ A-MPR.
4. Conducted power measurements were evaluated using various combinations of RB size, RB offset, modulation, and channel bandwidth. Channel bandwidth data is shown in the tables below based only on the channel bandwidths that were supported in this device.
5. All other conducted power measurements are contained in the RF exposure report for this filing.

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 14 of 136

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	55340	3560.0	1 / 99	23.59
		55990	3625.0	1 / 50	23.31
		56640	3690.0	1 / 99	23.13
	16-QAM	55990	3625.0	1 / 99	21.47
15 MHz	QPSK	55315	3557.5	1 / 74	23.02
		55990	3625.0	1 / 37	23.32
		56665	3692.5	1 / 37	23.21
	16-QAM	55990	3625.0	1 / 74	22.13
10 MHz	QPSK	55290	3555.0	1 / 25	23.08
		55990	3625.0	1 / 25	23.48
		56690	3695.0	1 / 25	23.29
	16-QAM	55990	3625.0	1 / 49	22.37
5 MHz	QPSK	55265	3552.5	1 / 12	23.19
		55990	3625.0	1 / 12	23.42
		56715	3697.5	1 / 12	23.45
	16-QAM	55990	3625.0	1 / 12	22.35

Table 7-2. Conducted Power Output Data (LTE Band 48)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 15 of 136

Bandwidth	Modulation	PCC			SCC			Conducted Power [dBm]
		Bandwidth [MHz]	Frequency [MHz]	RB / Offset	Bandwidth [MHz]	Frequency [MHz]	RB / Offset	
40 MHz	QPSK	20	3560.0	1 / 99	20	3579.8	1 / 0	23.75
		20	3625.0	1 / 99	20	3644.8	1 / 0	23.90
		20	3690.0	1 / 0	20	3670.2	1 / 99	23.82
	16-QAM	20	3560.0	1 / 99	20	3579.8	1 / 0	22.85
		20	3625.0	1 / 99	20	3644.8	1 / 0	23.02
		20	3690.0	1 / 0	20	3670.2	1 / 99	22.96
35 MHz	QPSK	20	3560.0	1 / 99	15	3577.1	1 / 0	23.69
		20	3625.0	1 / 99	15	3642.1	1 / 0	23.85
		20	3690.0	1 / 0	15	3672.9	1 / 74	23.81
	16-QAM	20	3560.0	1 / 99	15	3577.1	1 / 0	22.81
		20	3625.0	1 / 99	15	3642.1	1 / 0	22.92
		20	3690.0	1 / 0	15	3672.9	1 / 74	22.94
30 MHz	QPSK	20	3560.0	1 / 99	10	3574.4	1 / 0	23.62
		20	3625.0	1 / 99	10	3639.4	1 / 0	23.78
		20	3690.0	1 / 0	10	3675.6	1 / 49	23.90
	16-QAM	20	3560.0	1 / 99	10	3574.4	1 / 0	22.90
		20	3625.0	1 / 99	10	3639.4	1 / 0	22.78
		20	3690.0	1 / 0	10	3675.6	1 / 49	22.81
25 MHz	QPSK	20	3560.0	1 / 99	5	3571.7	1 / 0	23.74
		20	3625.0	1 / 99	5	3636.7	1 / 0	23.91
		20	3690.0	1 / 0	5	3678.3	1 / 24	23.63
	16-QAM	20	3560.0	1 / 99	5	3571.7	1 / 0	22.78
		20	3625.0	1 / 99	5	3636.7	1 / 0	22.65
		20	3690.0	1 / 0	5	3678.3	1 / 24	22.86

Table 7-3. Conducted Power Output Data (ULCA LB48)

Test Case	NS	MCC	MNC	Channel BW [MHz]	PCC			SCC			A-MPR [dB]	Modulation	MPR [dB]	Maximum Target Output Power [dBm]	A-MPR Measured Power [dBm]
					Channel Frequency [MHz]	RB Size	RB Offset	Channel Frequency [MHz]	RB Size	RB Offset					
1	CA_NS_10	310	910	20 + 20	3560	100	0	3579.8	100	0	≤ 11	QPSK	0	24.00	18.50
16-QAM												1	23.00	18.71	
2				20 + 20	3560	1	99	3579.8	1	0	≤ 11	QPSK	0	24.00	21.60
16-QAM												1	23.00	21.54	
3				20 + 20	3625	100	0	3644.8	100	0	≤ 4.5	QPSK	0	24.00	18.12
16-QAM												1	23.00	18.10	
4				20 + 20	3625	1	99	3644.8	1	0	≤ 4.5	QPSK	0	24.00	21.45
16-QAM												1	23.00	21.57	
5				20 + 20	3690	100	0	3670.2	100	0	≤ 11	QPSK	0	24.00	11.72
16-QAM												1	23.00	11.75	
6				20 + 20	3690	1	0	3670.2	1	99	≤ 11	QPSK	0	24.00	18.24
16-QAM												1	23.00	18.30	

Table 7-4. A-MPR Conducted Power Output Data (ULCA LB48)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 16 of 136

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
40 MHz	π/2 BPSK	638000	3570.0	1 / 79	23.39
		641666	3625.0	1 / 53	23.59
		645332	3680.0	1 / 26	23.23
	QPSK	638000	3570.0	1 / 26	23.35
		641666	3625.0	1 / 53	23.52
		645332	3680.0	1 / 26	23.22
16-QAM	641666	3625.0	1 / 53	22.40	
30 MHz	π/2 BPSK	637666	3565.0	1 / 39	23.30
		641666	3625.0	1 / 39	23.21
		645666	3685.0	1 / 39	23.21
	QPSK	637666	3565.0	1 / 39	23.58
		641666	3625.0	1 / 39	23.30
		645666	3685.0	1 / 39	23.50
16-QAM	637666	3565.0	1 / 39	19.36	
20 MHz	π/2 BPSK	637334	3560.0	1 / 37	23.62
		641666	3625.0	1 / 37	23.80
		646000	3690.0	1 / 13	22.91
	QPSK	637334	3560.0	1 / 37	23.00
		641666	3625.0	1 / 37	23.83
		646000	3690.0	1 / 13	22.51
16-QAM	646000	3690.0	1 / 13	20.95	
15 MHz	π/2 BPSK	637166	3557.5	1 / 19	23.76
		641666	3625.0	1 / 19	23.88
		646166	3692.5	1 / 19	23.67
	QPSK	637166	3557.5	1 / 19	23.11
		641666	3625.0	1 / 19	23.07
		646166	3692.5	1 / 19	22.89
16-QAM	646166	3692.5	1 / 19	21.86	
10 MHz	π/2 BPSK	637000	3555.0	1 / 17	22.95
		641666	3625.0	1 / 12	23.21
		646332	3695.0	1 / 17	23.74
	QPSK	637000	3555.0	1 / 17	22.47
		641666	3625.0	1 / 12	23.05
		646332	3695.0	1 / 17	22.65
16-QAM	641666	3625.0	1 / 12	20.79	

Table 7-5. Conducted Power Output Data (NR Band n48 Ant F)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 17 of 136

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
40 MHz	TT/2 BPSK	638000	3570.0	1 / 79	19.79
		641666	3625.0	1 / 53	19.70
		645332	3680.0	1 / 53	19.89
	QPSK	638000	3570.0	1 / 79	19.56
		641666	3625.0	1 / 53	19.76
		645332	3680.0	1 / 53	19.40
	16-QAM	638000	3570.0	1 / 79	18.22

Table 7-6. Conducted Power Output Data (NR Band n48 Ant C)

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
40 MHz	TT/2 BPSK	638000	3570.0	1/53	19.86
		641666	3625.0	1/79	19.71
		645332	3680.0	1/26	19.35
	QPSK	638000	3570.0	1/53	19.47
		641666	3625.0	1/79	19.83
		645332	3680.0	1/26	18.81
	16-QAM	641666	3625.0	1/79	18.16

Table 7-7. Conducted Power Output Data (NR Band n48 Ant I)

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
40 MHz	TT/2 BPSK	638000	3570.0	100/0	17.89
		641666	3625.0	1 / 53	17.82
		645332	3680.0	1 / 79	18.49
	QPSK	638000	3570.0	1 / 79	17.80
		641666	3625.0	1 / 53	17.60
		645332	3680.0	1 / 79	17.45
	16-QAM	645332	3680.0	1 / 79	17.15

Table 7-8. Conducted Power Output Data (NR Band n48 Ant D)

NR (SCS 30kHz)						LTE						NR	LTE	EN-DC
NR Band	NR Bandwidth [MHz]	NR Channel	NR Frequency [MHz]	Mod.	NR RB#/Offset	LTE Band	LTE Bandwidth [MHz]	LTE Channel	LTE Frequency [MHz]	Mod.	LTE RB#/Offset	NR Conducted Power [dBm]	LTE Conducted Power [dBm]	EN-DC Total Tx. Power [dBm]
n48	40	Mid	3625	QPSK	100/0	B2	20	Mid	1880	QPSK	100/0	18.93	22.01	23.75
				QPSK	100/0					QPSK	1/50	17.27	22.49	23.63
				QPSK	1/53					QPSK	100/0	19.04	22.00	23.78
				QPSK	1/53					QPSK	1/50	17.33	22.59	23.72
				16Q	1/53					16Q	1/50	18.94	22.17	23.86

Table 7-9. Conducted Power Output Data (EN-DC: NR Band n48 – LTE Band 2)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 18 of 136

7.3 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 – Section 5.4.4

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

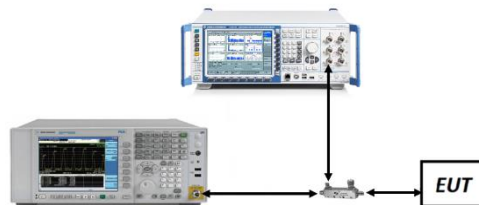



Figure 7-2. Test Instrument & Measurement Setup

Test Notes


- 1) Occupied Bandwidth was only measured on the antenna (Ant F) with the highest power for the NR band.
- 2) Only the worst case data for each Modulation/Channel Bandwidth combination is displayed in the following plots.

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 19 of 136

LTE Band 48

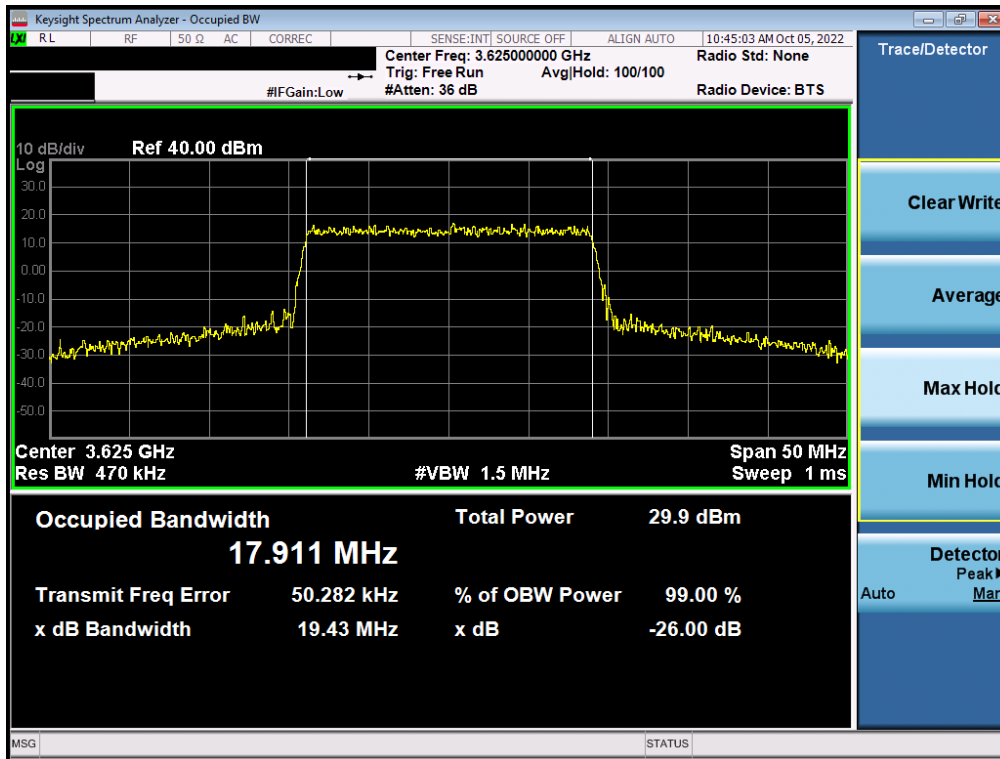


Plot 7-1. Occupied Bandwidth Plot (LTE Band 48 - 20MHz QPSK - Full RB Configuration)

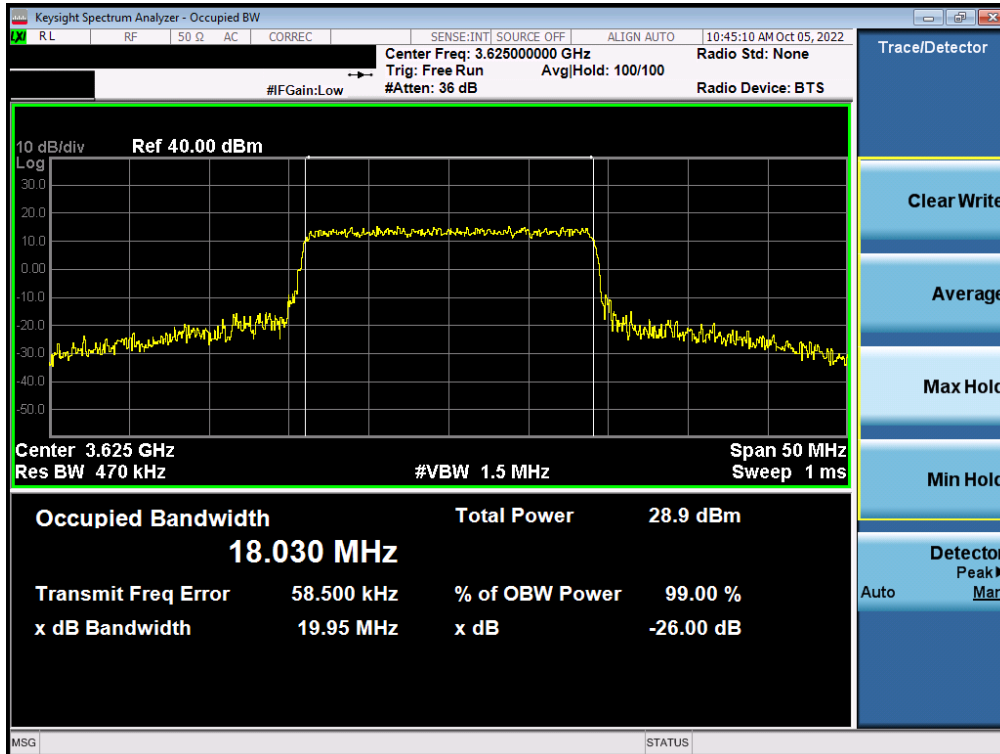


Plot 7-2. Occupied Bandwidth Plot (LTE Band 48 - 20MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 20 of 136

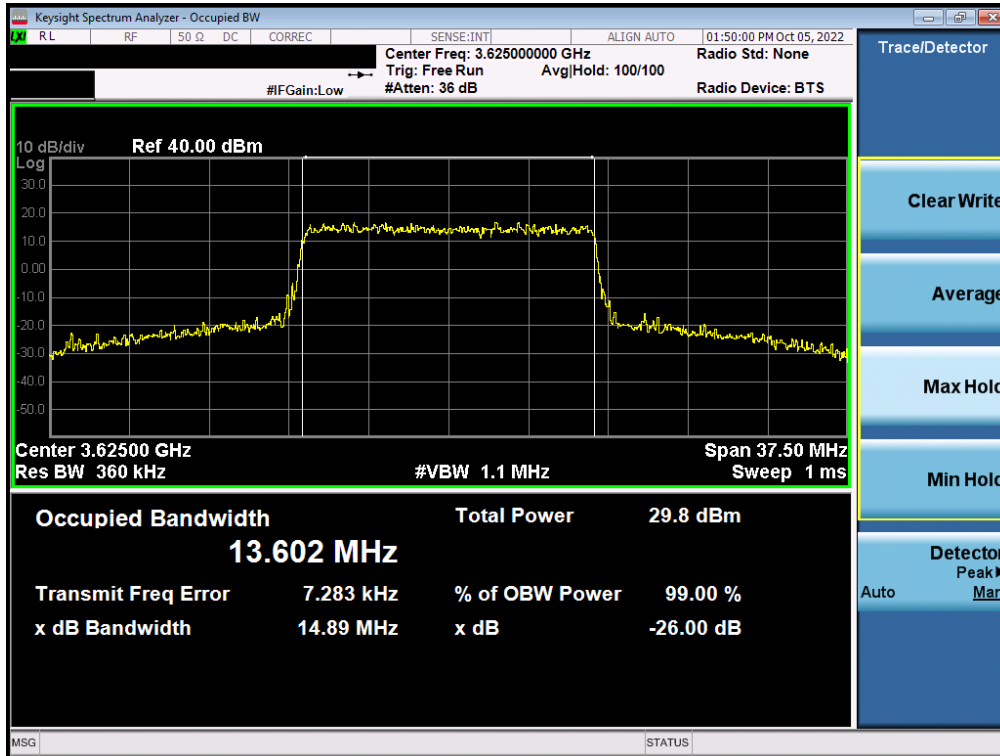


Plot 7-3. Occupied Bandwidth Plot (LTE Band 48 - 15MHz QPSK - Full RB Configuration)

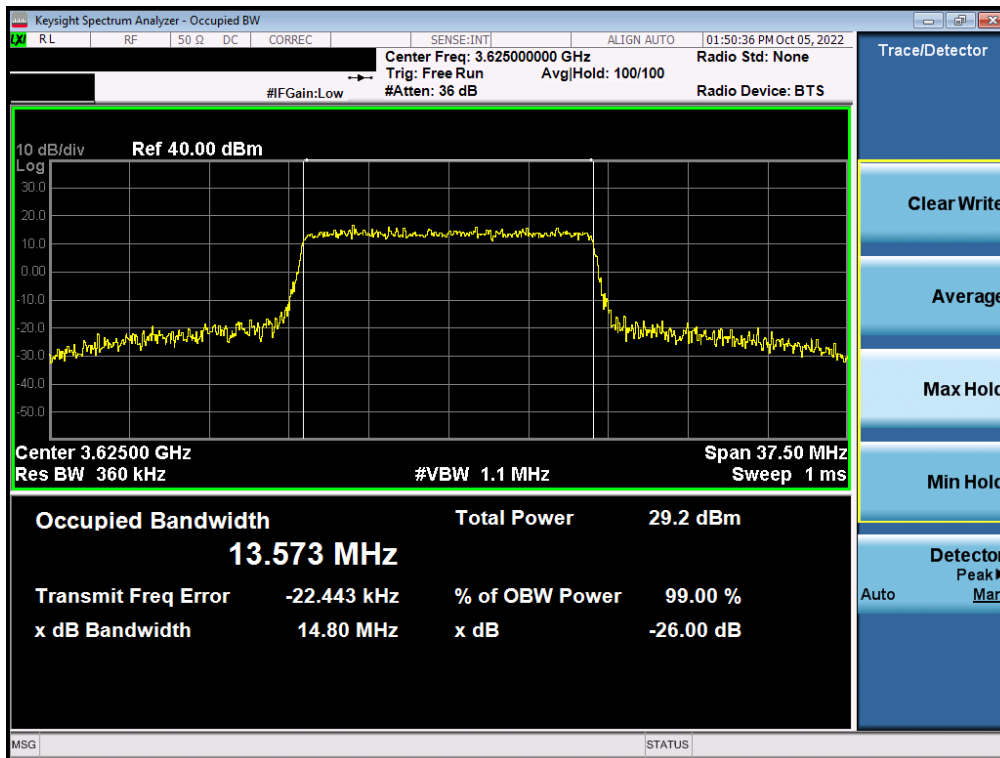


Plot 7-4. Occupied Bandwidth Plot (LTE Band 48 - 15MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 21 of 136

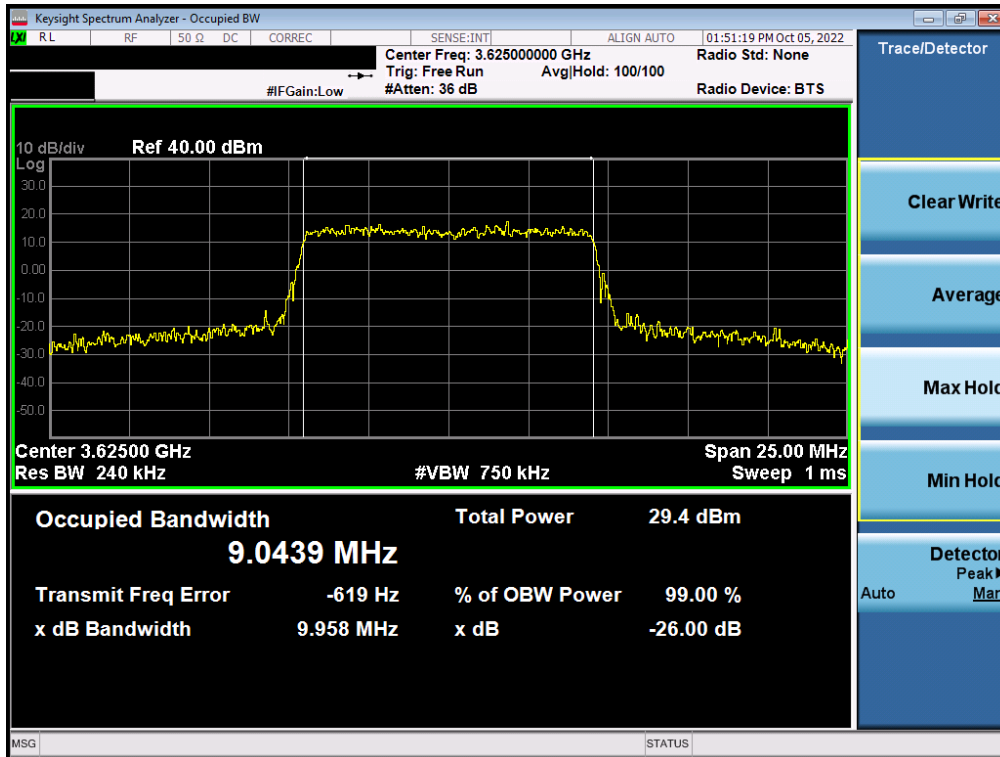


Plot 7-5. Occupied Bandwidth Plot (LTE Band 48 - 10MHz QPSK - Full RB Configuration)

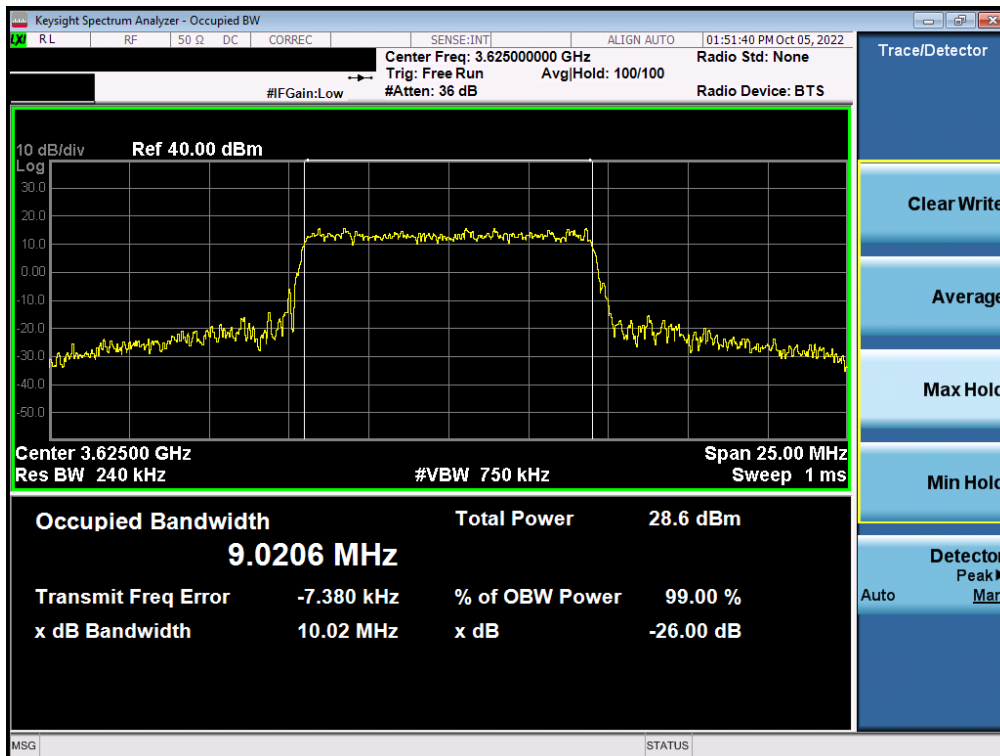


Plot 7-6. Occupied Bandwidth Plot (LTE Band 48 - 10MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 22 of 136

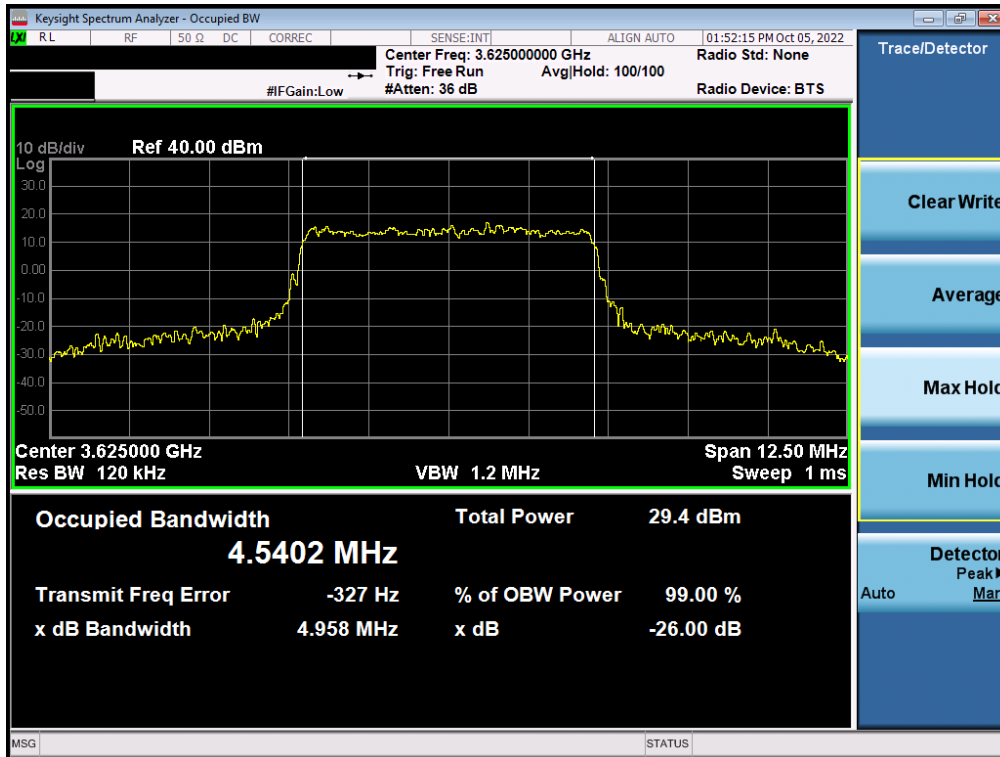


Plot 7-7. Occupied Bandwidth Plot (LTE Band 48 - 5MHz QPSK - Full RB Configuration)

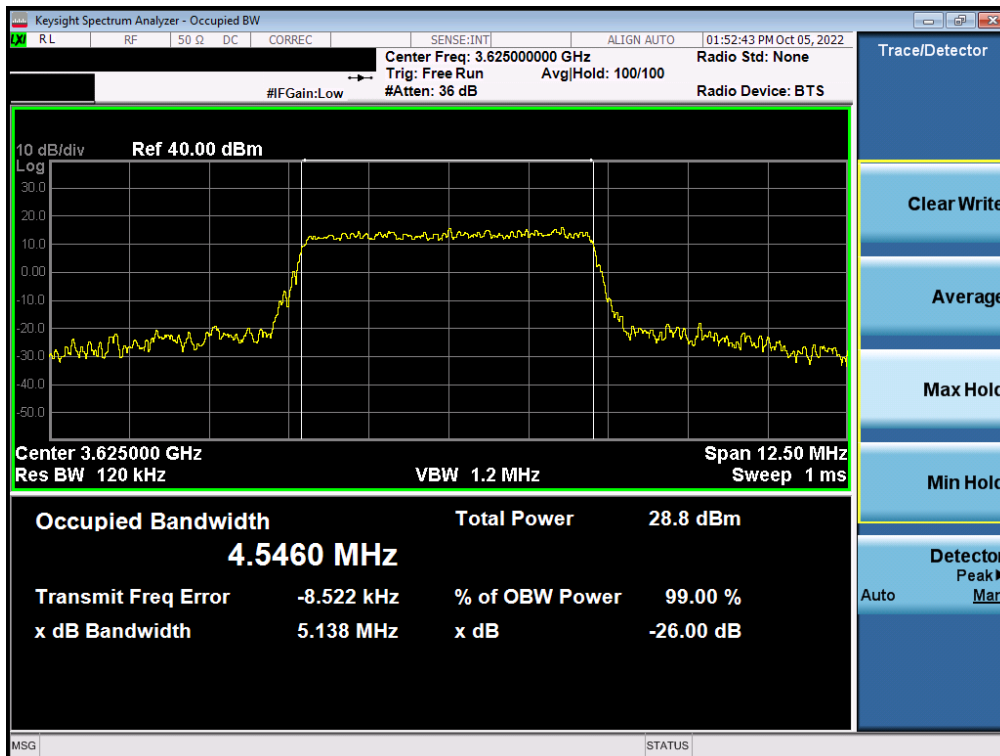


Plot 7-8. Occupied Bandwidth Plot (LTE Band 48 - 5MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 23 of 136

ULCA LTE Band 48

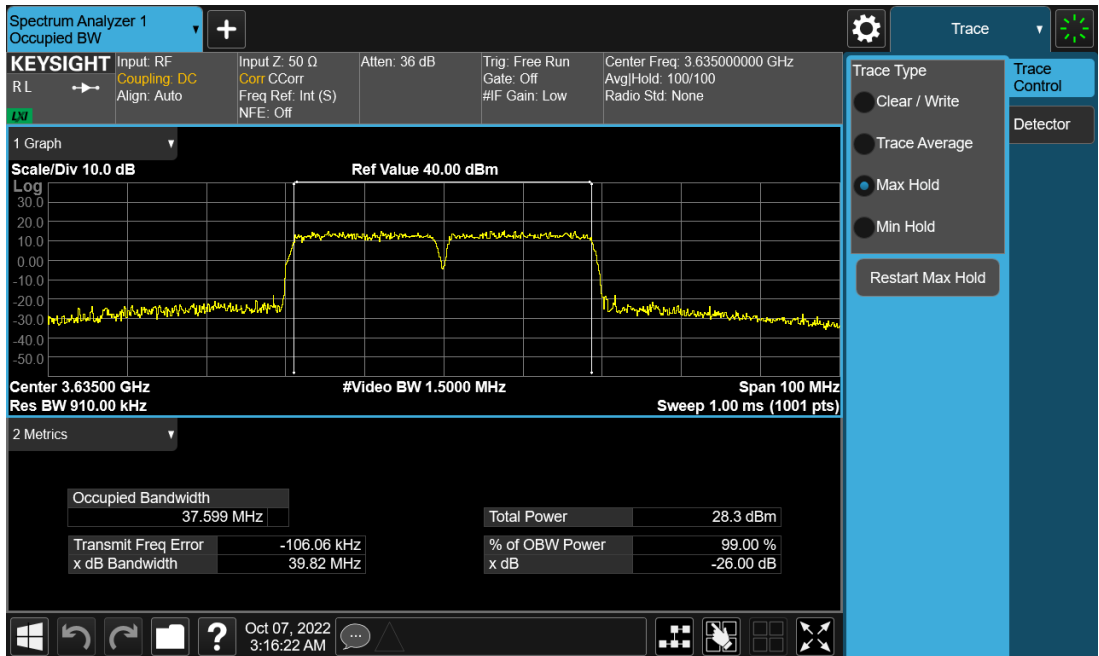


Plot 7-9. Occupied Bandwidth Plot (ULCA LB48 - 20+20MHz QPSK - Full RB Configuration)

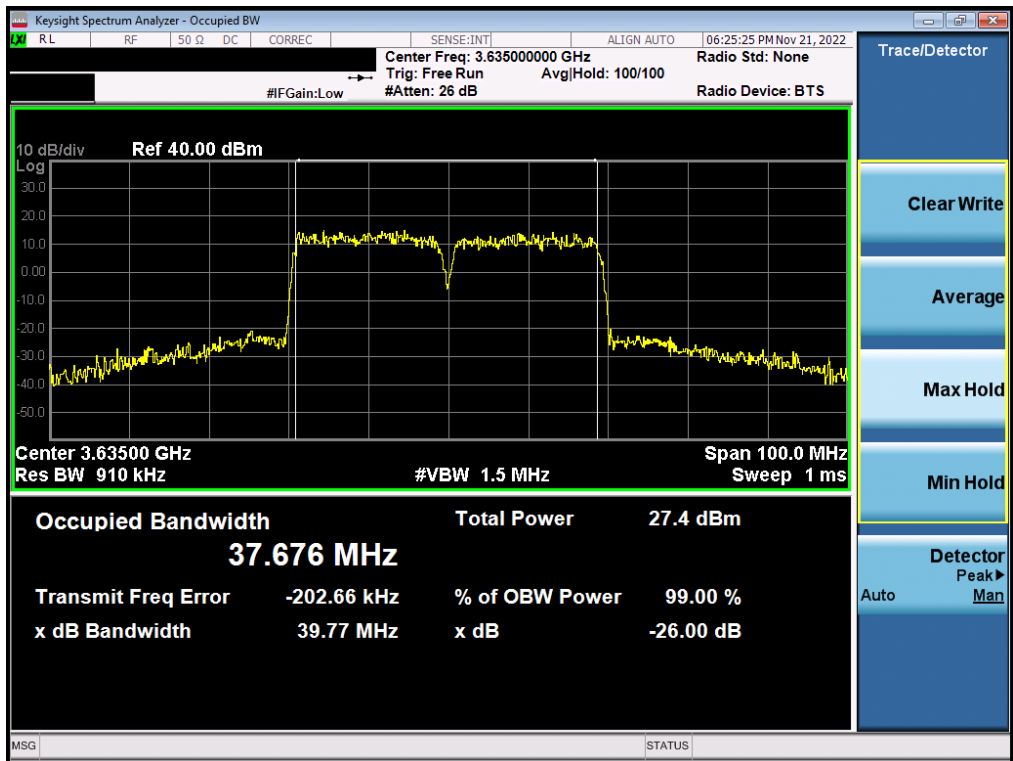


Plot 7-10. Occupied Bandwidth Plot (ULCA LB48 - 20+20MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 24 of 136

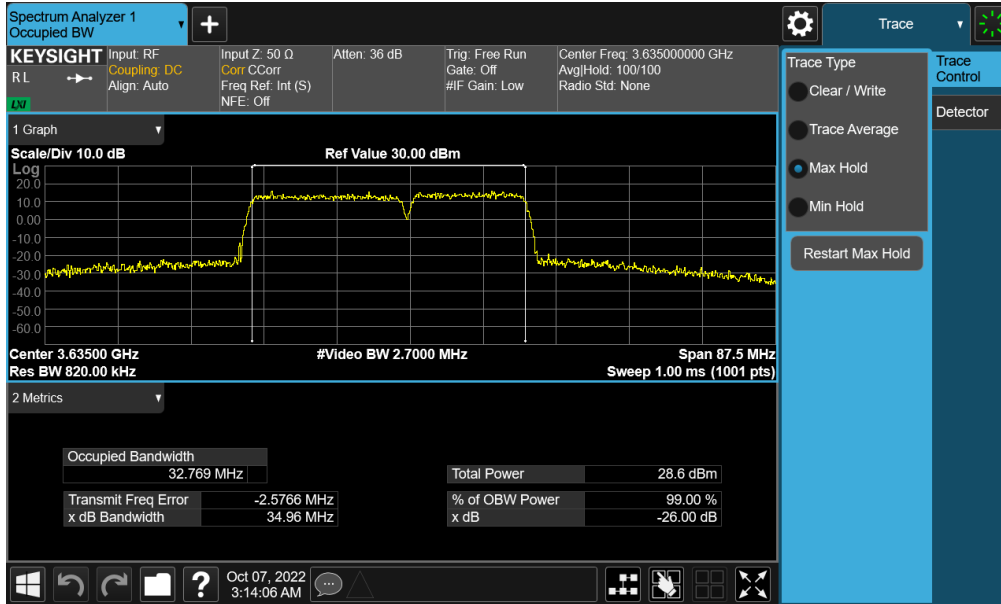


Plot 7-11. Occupied Bandwidth Plot (ULCA LB48 - 20+15MHz QPSK - Full RB Configuration)

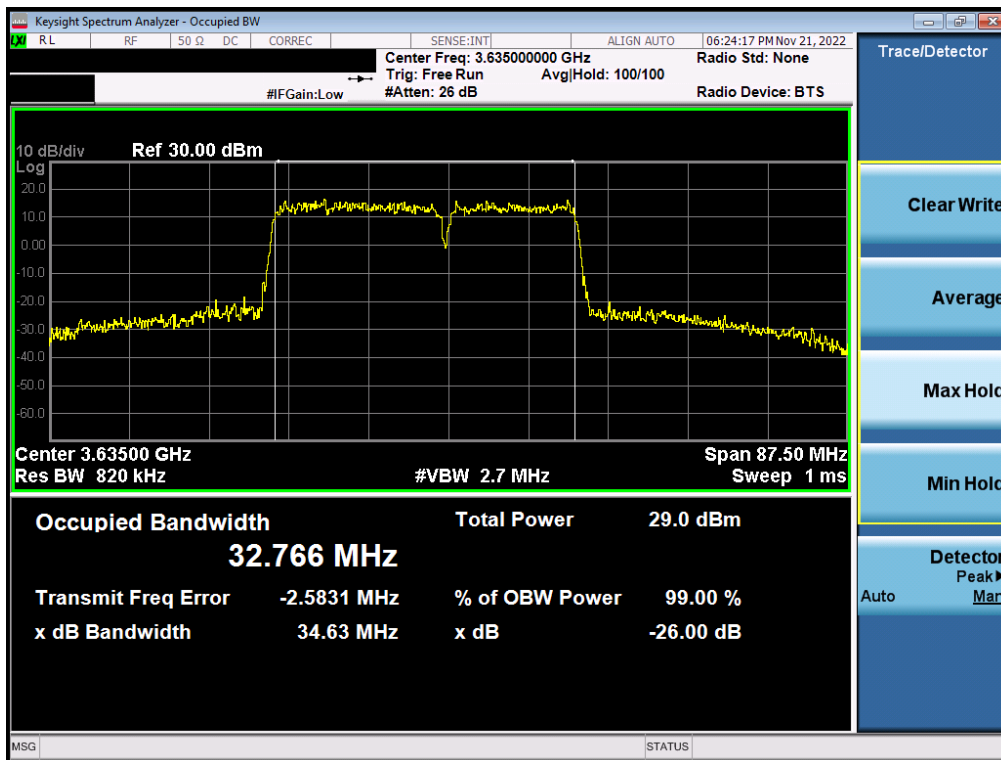

Plot 7-12. Occupied Bandwidth Plot (ULCA LB48 - 20+15MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 25 of 136


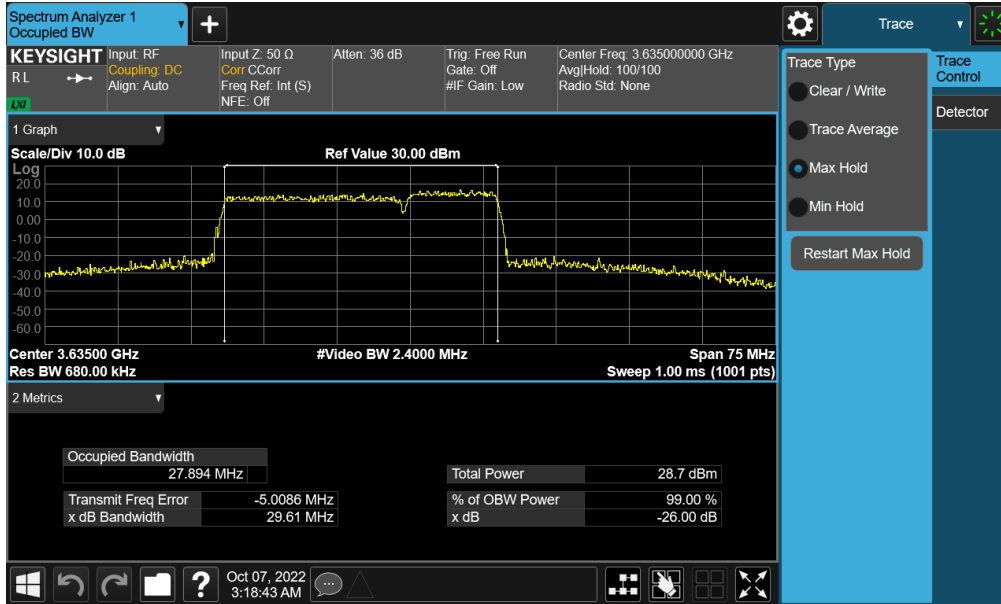


Plot 7-13. Occupied Bandwidth Plot (ULCA LB48 - 20+10MHz QPSK - Full RB Configuration)




Plot 7-14. Occupied Bandwidth Plot (ULCA LB48 - 20+10MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 26 of 136

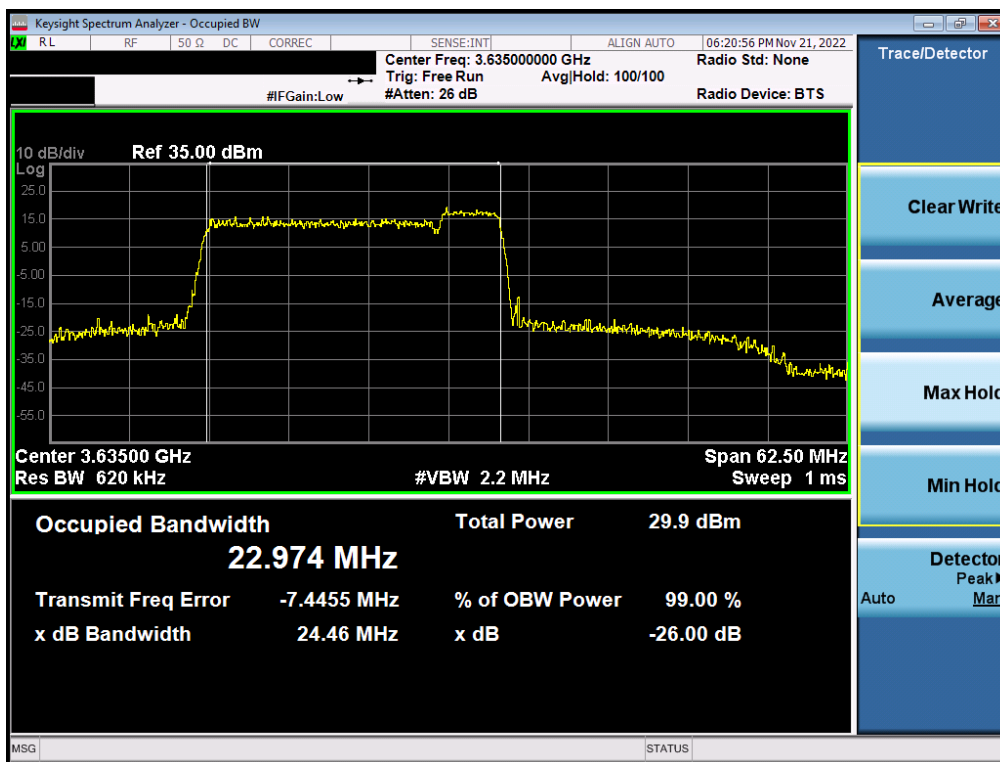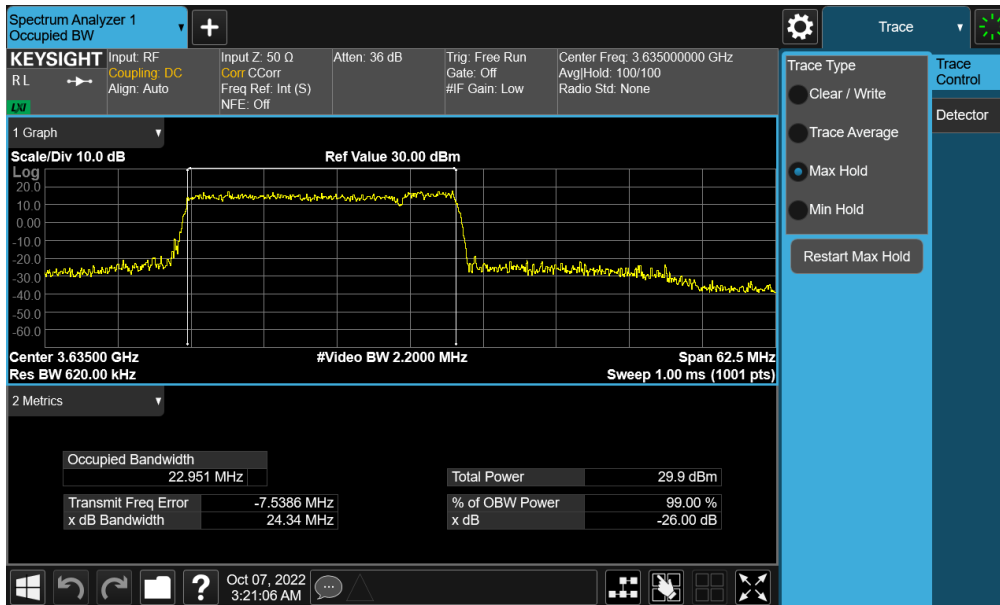


FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 27 of 136

NR Band n48 – Ant F

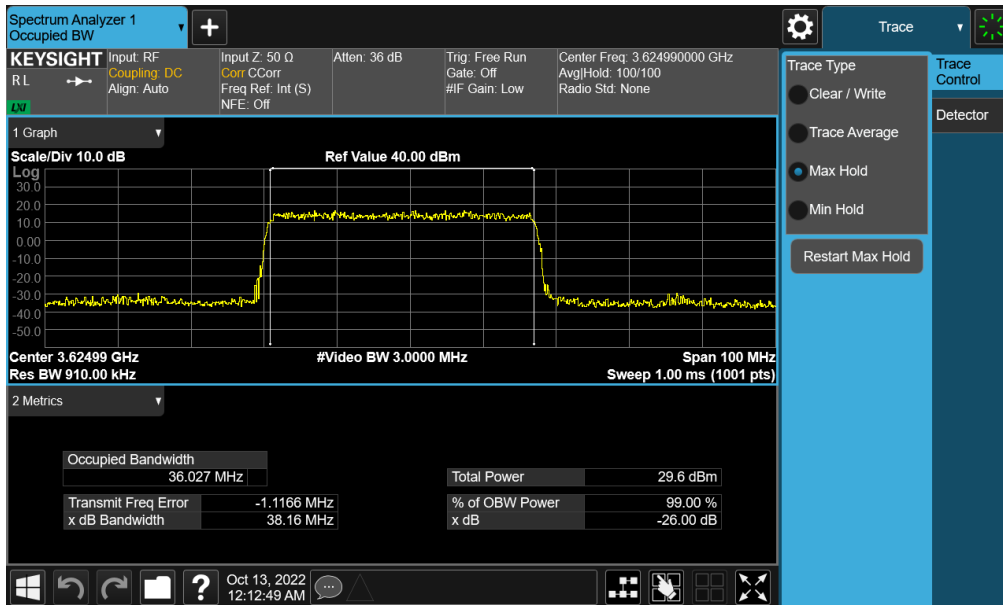


Plot 7-17. Occupied Bandwidth Plot (NR Band n48 - 40MHz $\pi/2$ BPSK - Full RB Configuration - Ant F)

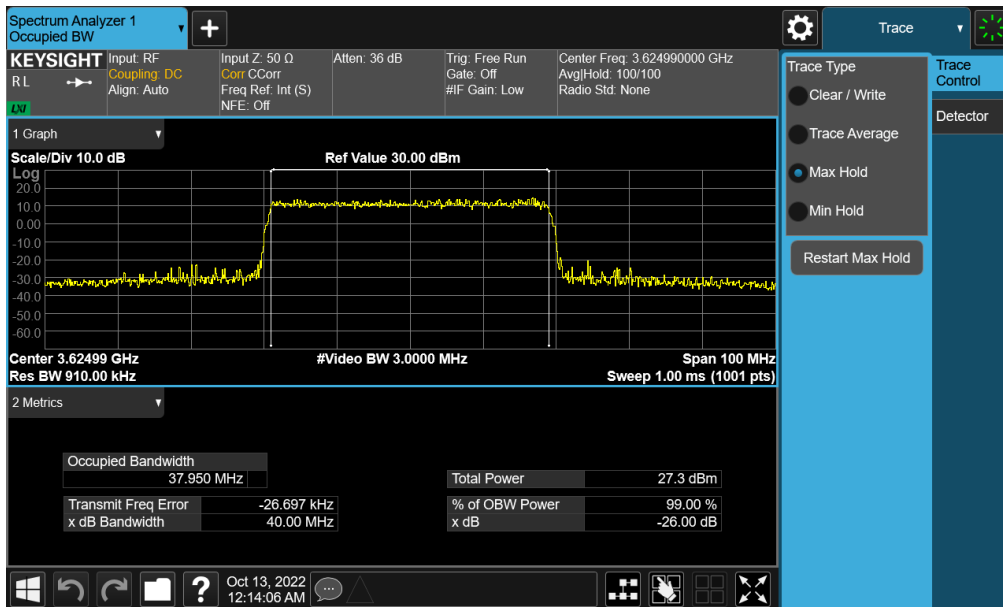


Plot 7-18. Occupied Bandwidth Plot (NR Band n48 - 40MHz QPSK - Full RB Configuration - Ant F)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 28 of 136

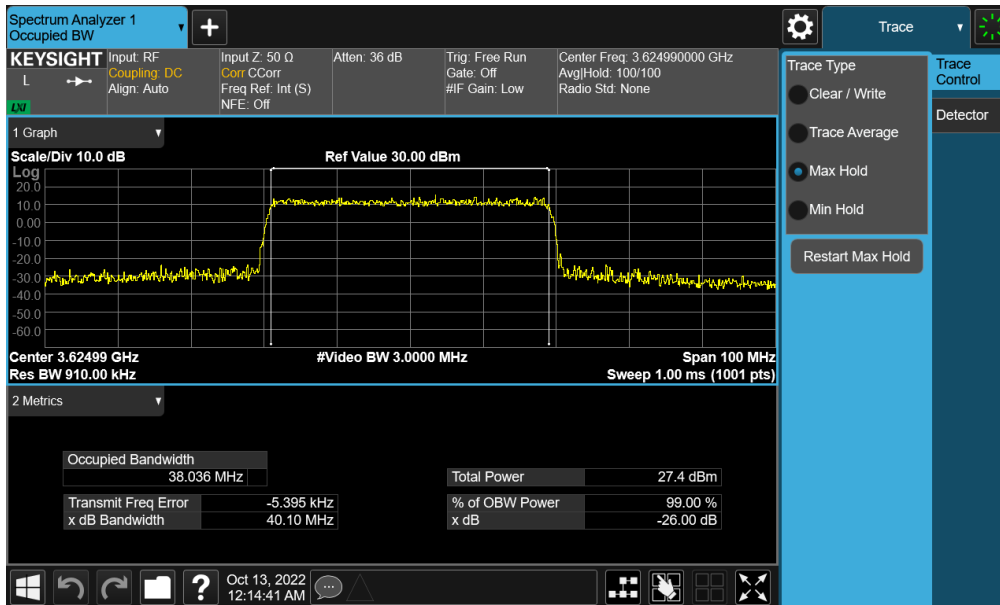


Plot 7-19. Occupied Bandwidth Plot (NR Band n48 - 40MHz 16-QAM - Full RB Configuration - Ant F)

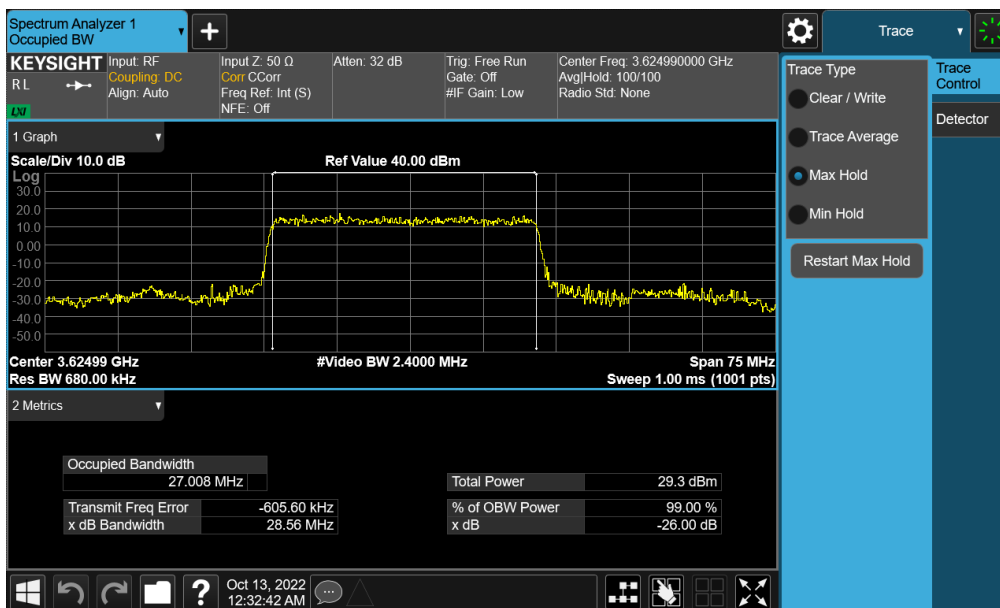


Plot 7-20. Occupied Bandwidth Plot (NR Band n48 - 30MHz $\pi/2$ BPSK - Full RB Configuration - Ant F)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 29 of 136

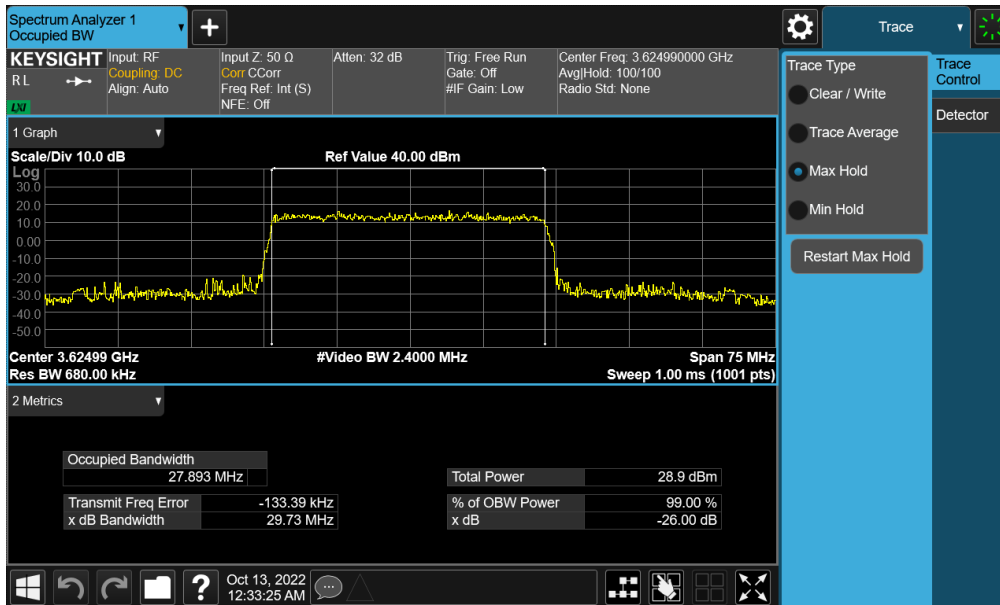


Plot 7-21. Occupied Bandwidth Plot (NR Band n48 - 30MHz QPSK - Full RB Configuration - Ant F)

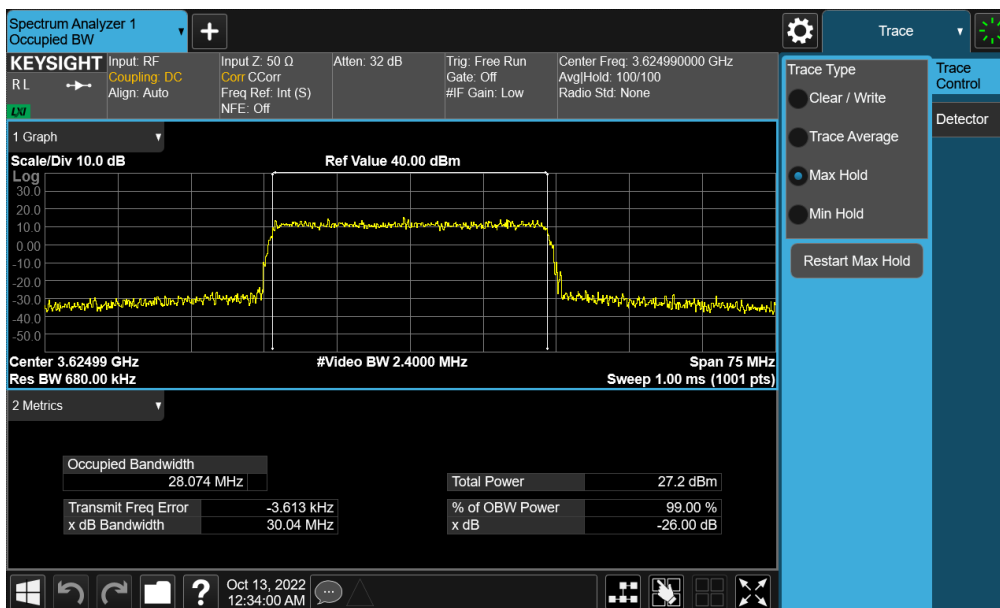


Plot 7-22. Occupied Bandwidth Plot (NR Band n48 - 30MHz 16-QAM - Full RB Configuration - Ant F)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 30 of 136

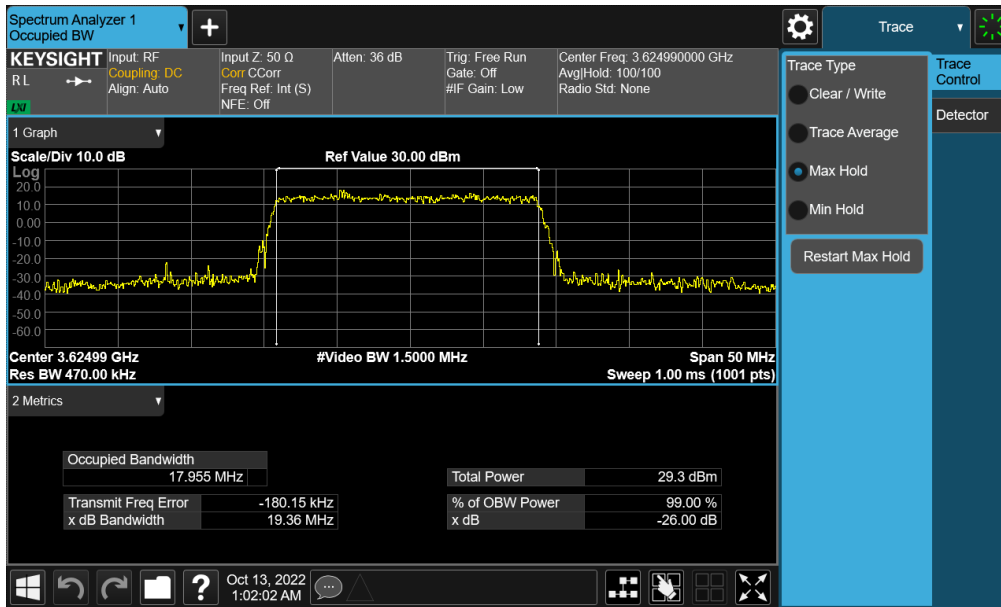


Plot 7-23. Occupied Bandwidth Plot (NR Band n48 - 20MHz $\pi/2$ BPSK - Full RB Configuration - Ant F)

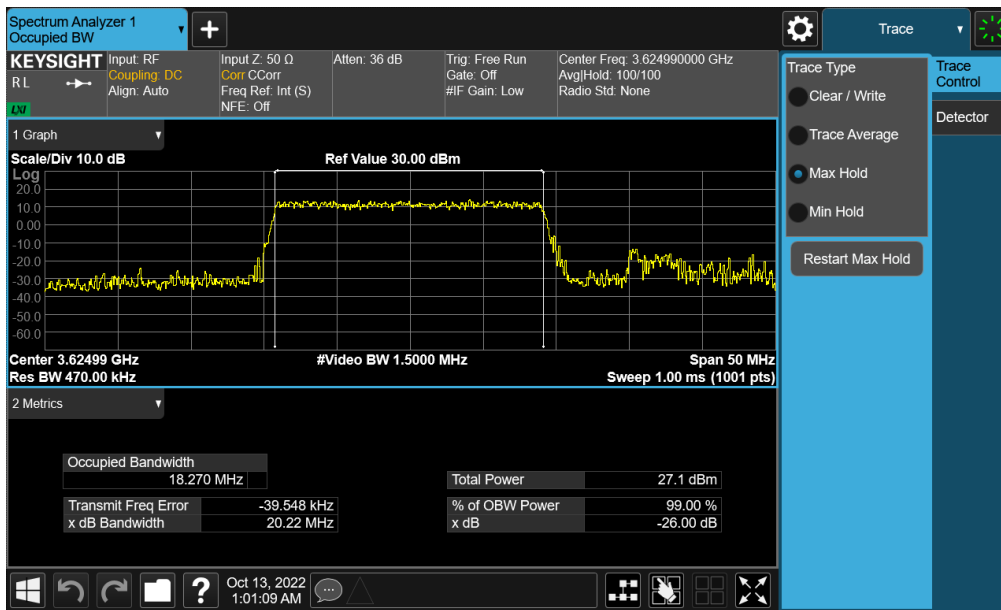


Plot 7-24. Occupied Bandwidth Plot (NR Band n48 - 20MHz QPSK - Full RB Configuration - Ant F)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 31 of 136

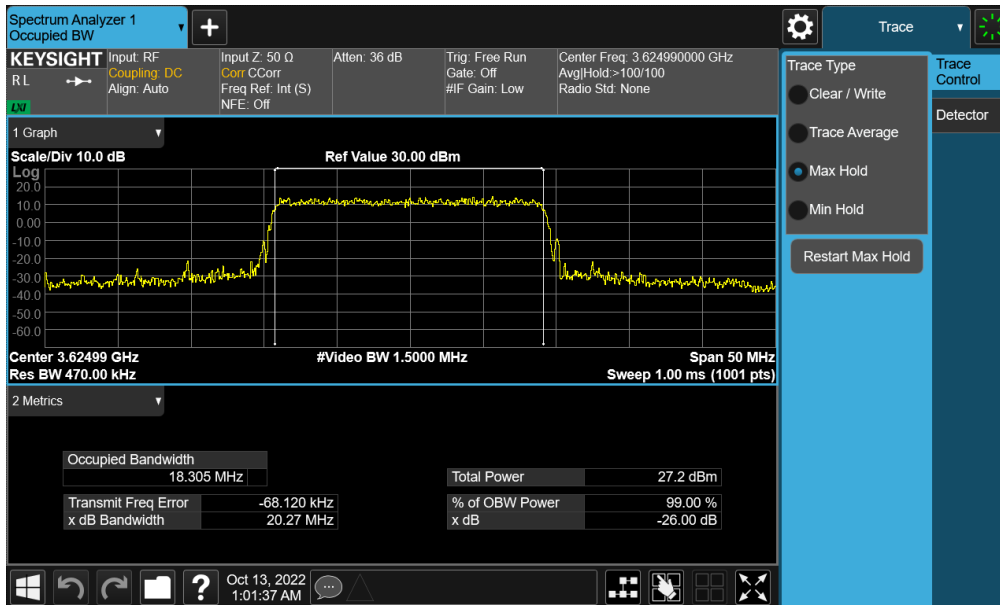


Plot 7-25. Occupied Bandwidth Plot (NR Band n48 - 20MHz 16-QAM - Full RB Configuration - Ant F)

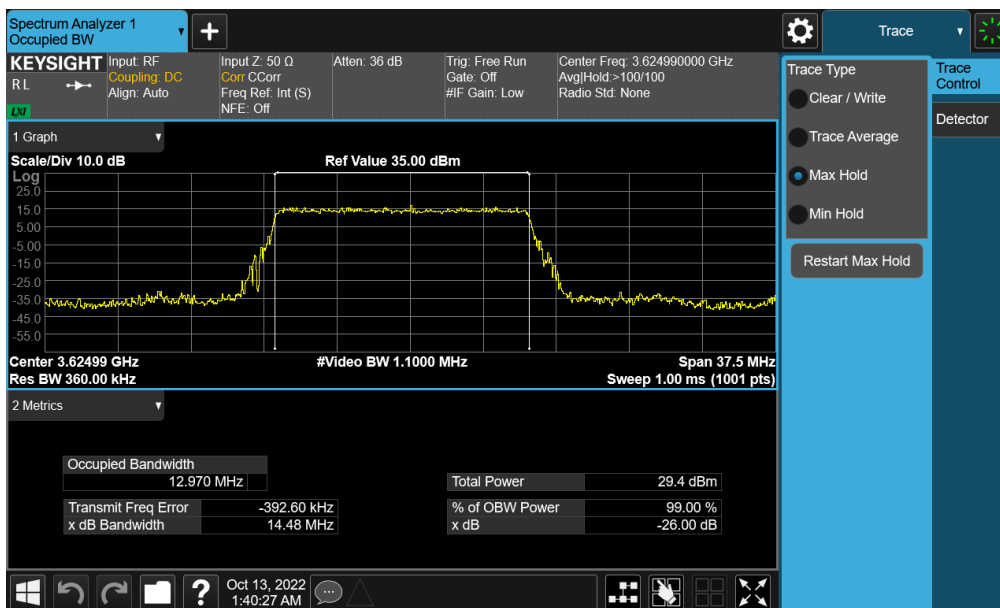


Plot 7-26. Occupied Bandwidth Plot (NR Band n48 - 15MHz $\pi/2$ BPSK - Full RB Configuration - Ant F)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 32 of 136

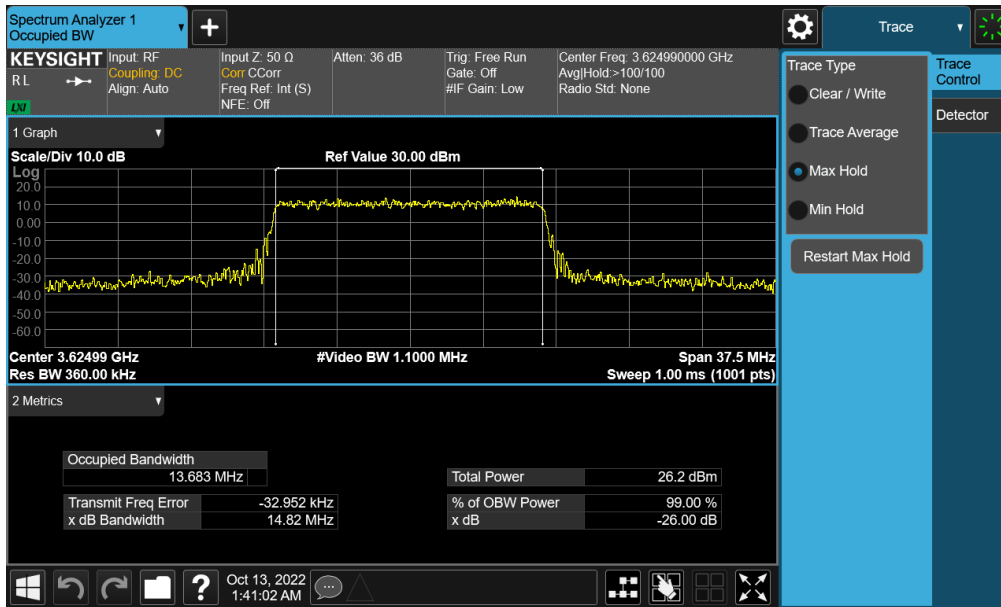


Plot 7-27. Occupied Bandwidth Plot (NR Band n48 - 15MHz QPSK - Full RB Configuration - Ant F)

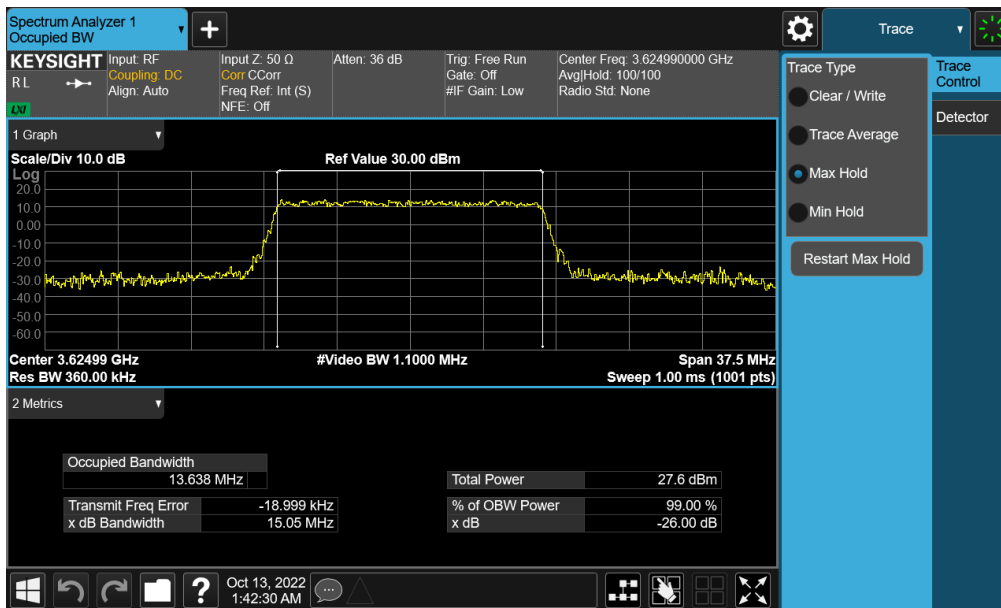


Plot 7-28. Occupied Bandwidth Plot (NR Band n48 - 15MHz 16-QAM - Full RB Configuration - Ant F)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 33 of 136

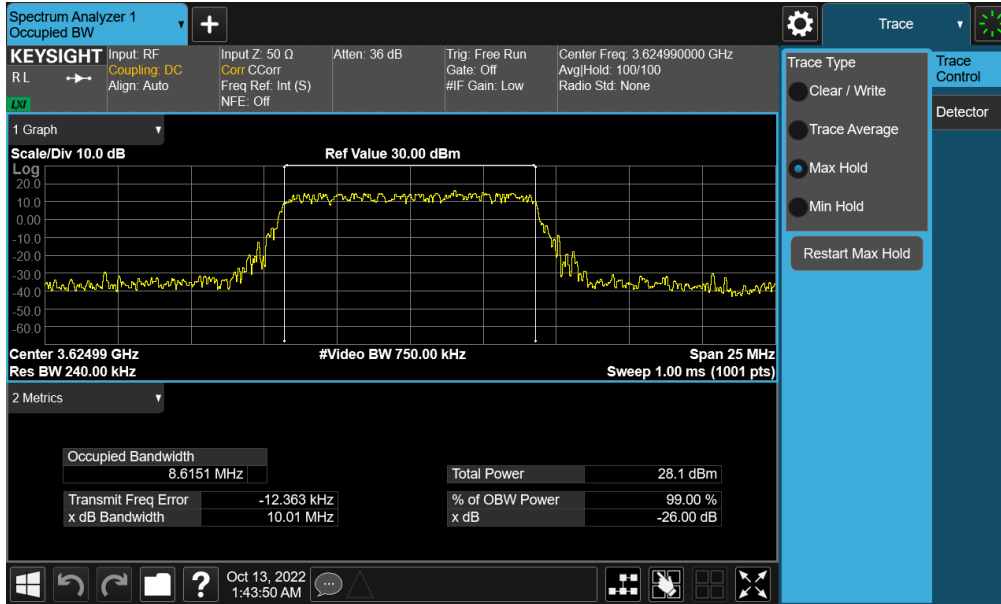


Plot 7-29. Occupied Bandwidth Plot (NR Band n48 - 10MHz $\pi/2$ BPSK - Full RB Configuration - Ant F)

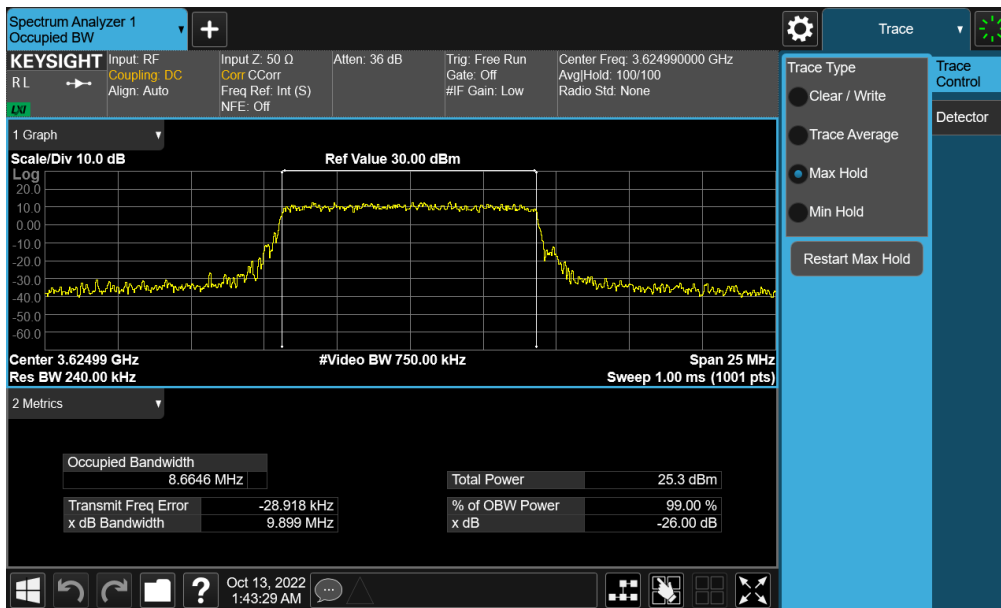

Plot 7-30. Occupied Bandwidth Plot (NR Band n48 - 10MHz QPSK - Full RB Configuration - Ant F)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 34 of 136

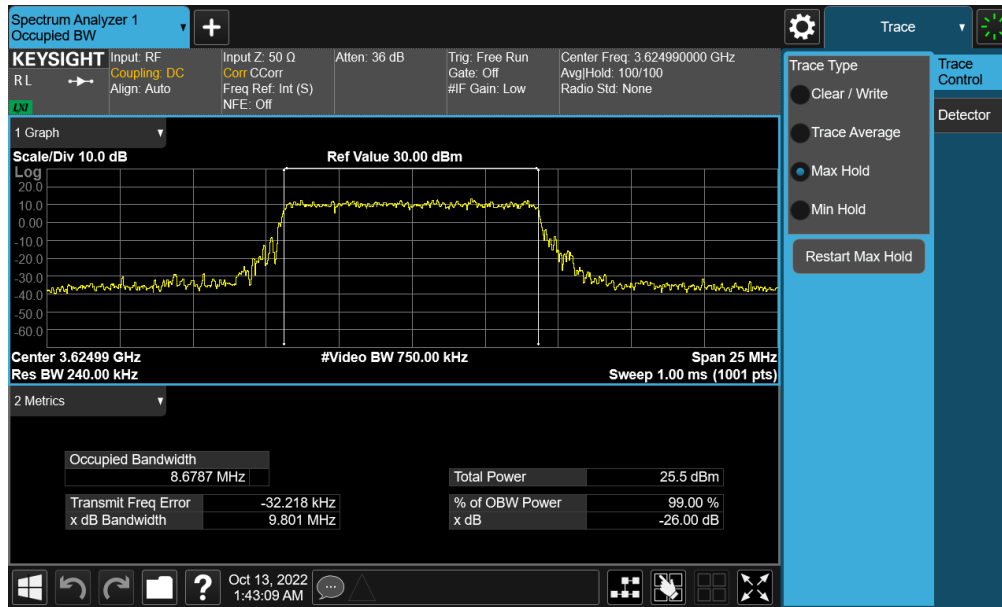

Plot 7-31. Occupied Bandwidth Plot (NR Band n48 - 10MHz 16-QAM - Full RB Configuration - Ant F)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 35 of 136

7.4 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/Mhz.

Test Procedure Used

ANSI C63.26-2015 – Section 5.7.4

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to at least 10 * the fundamental frequency (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = Max Hold
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

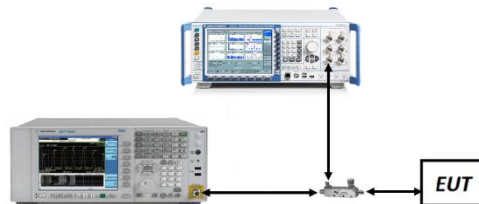



Figure 7-3. Test Instrument & Measurement Setup

Test Notes


1. Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz.
2. For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 36 of 136

LTE Band 48

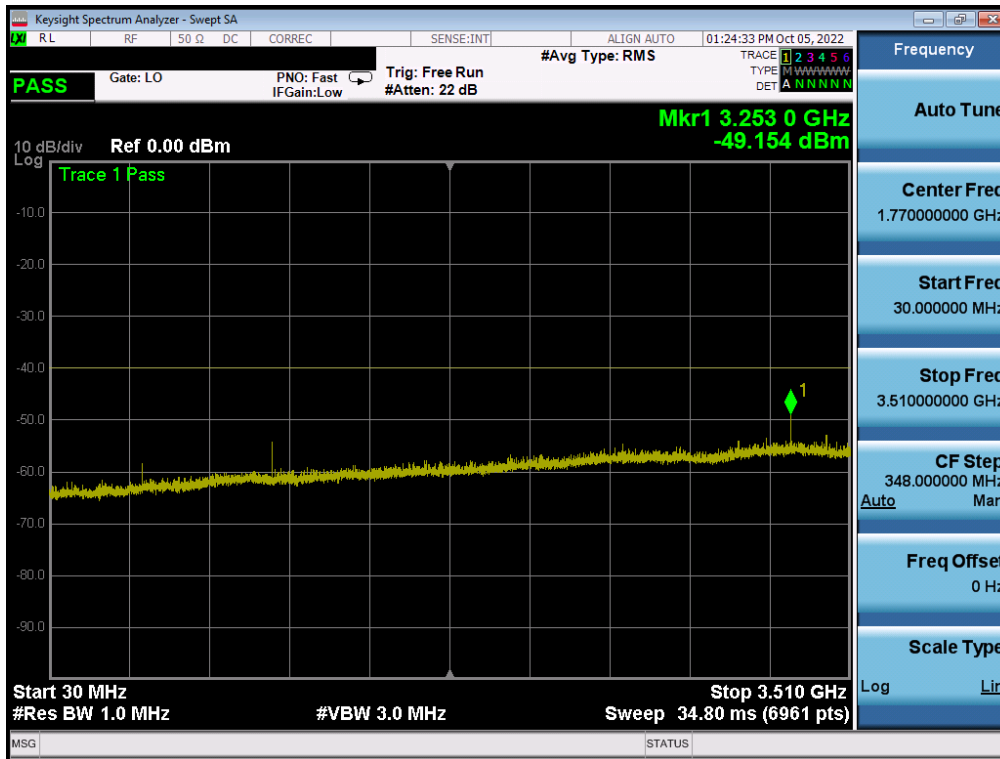


Plot 7-32. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - Low Channel)

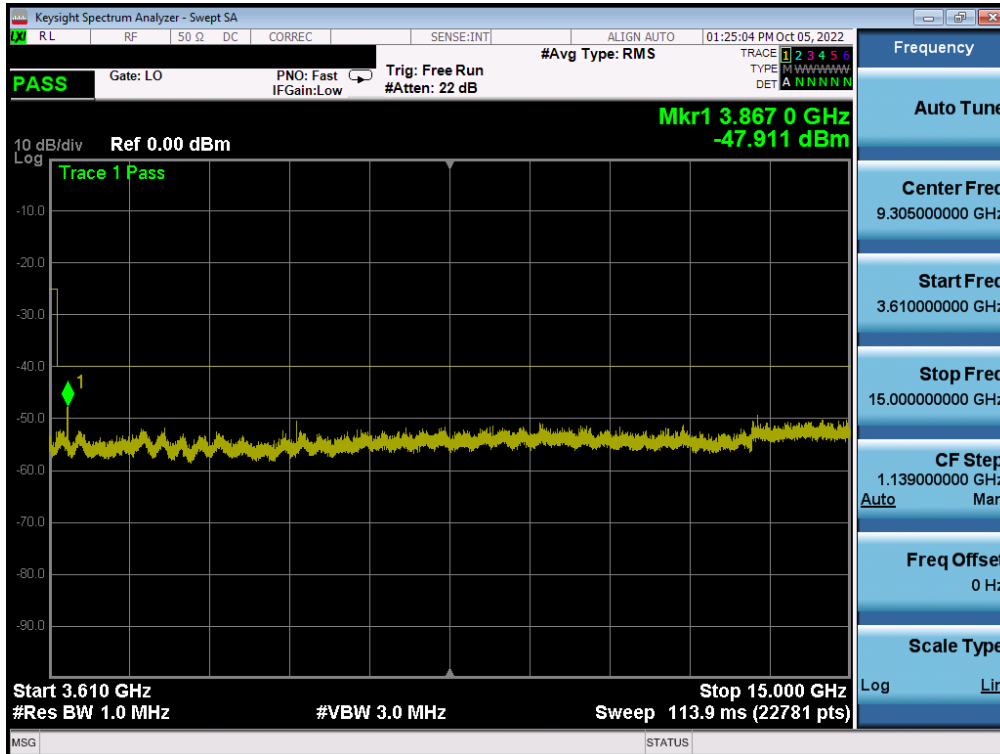


Plot 7-33. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - Low Channel)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 37 of 136

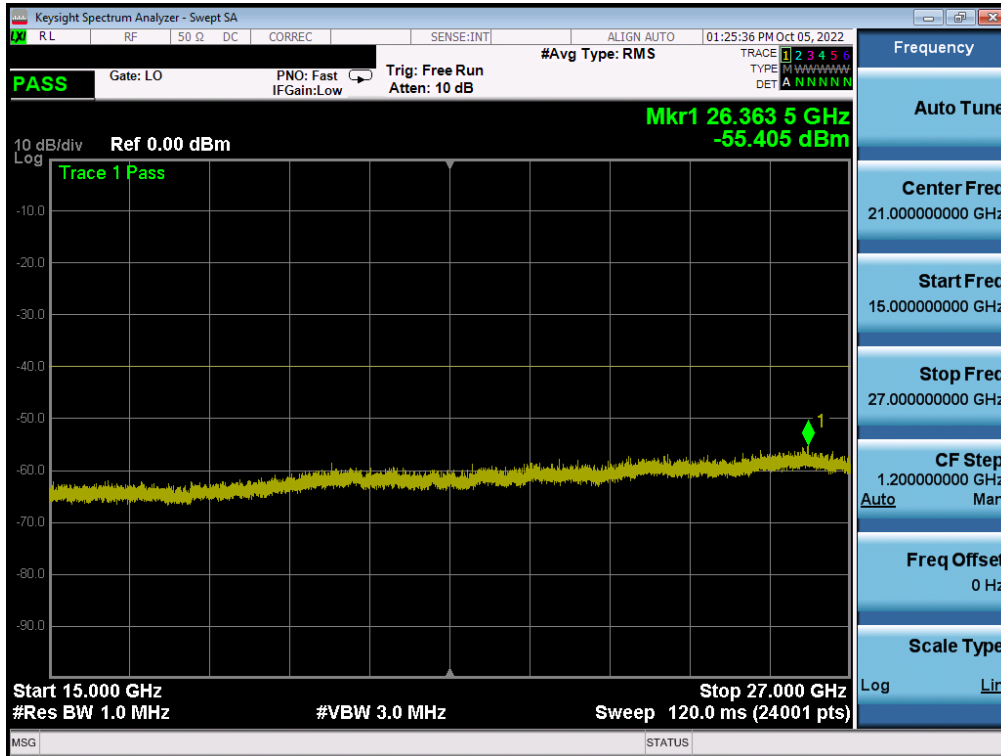


Plot 7-34. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - Low Channel)

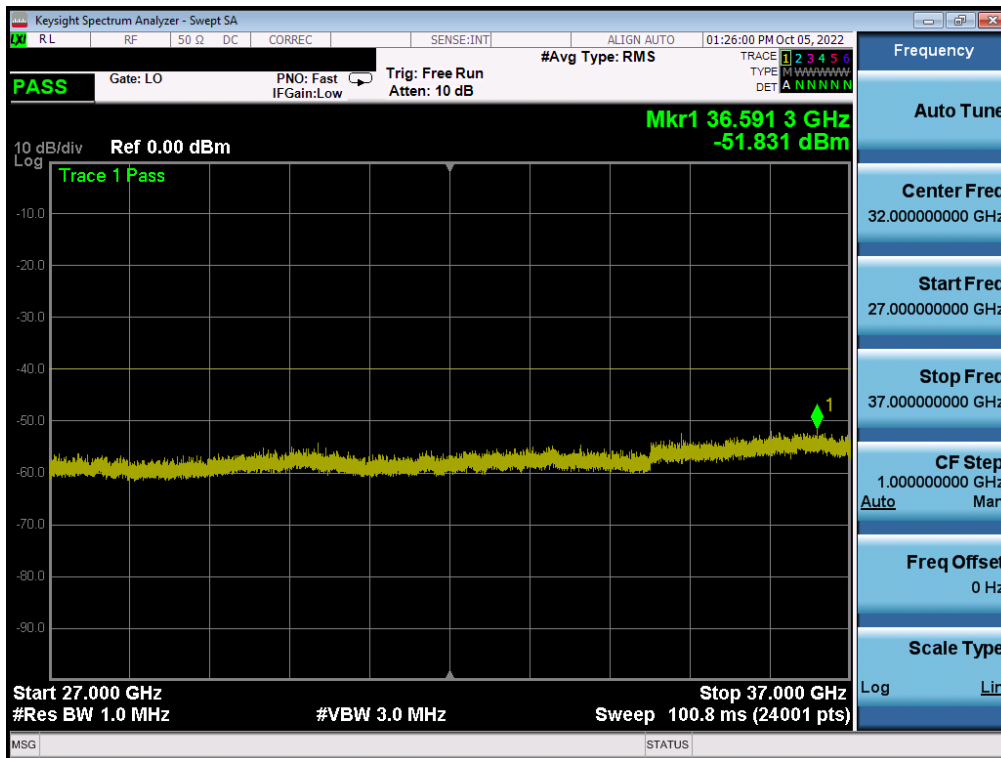


Plot 7-35. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - Low Channel)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 38 of 136

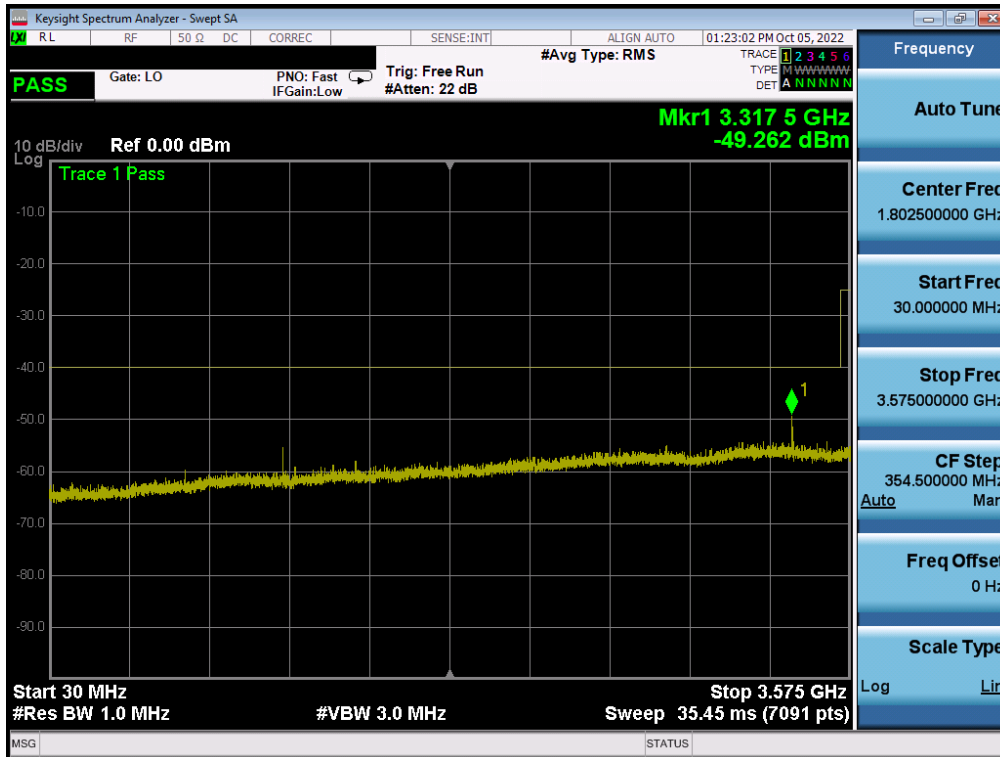


Plot 7-36. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - Mid Channel)

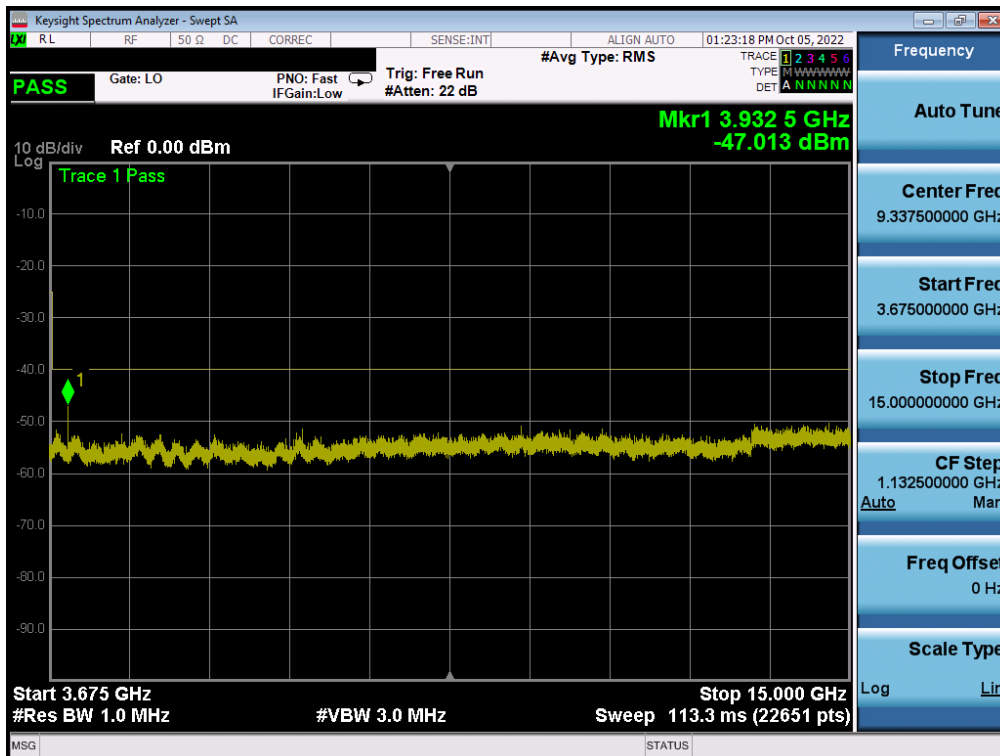


Plot 7-37. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - Mid Channel)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 39 of 136

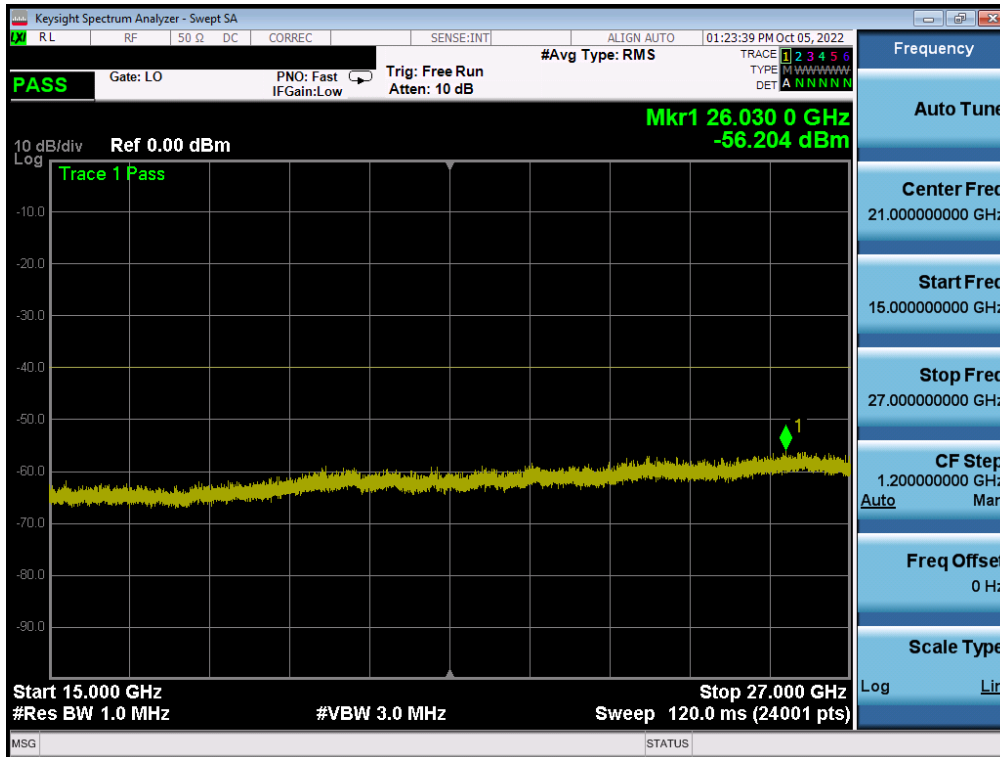


Plot 7-38. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - Mid Channel)

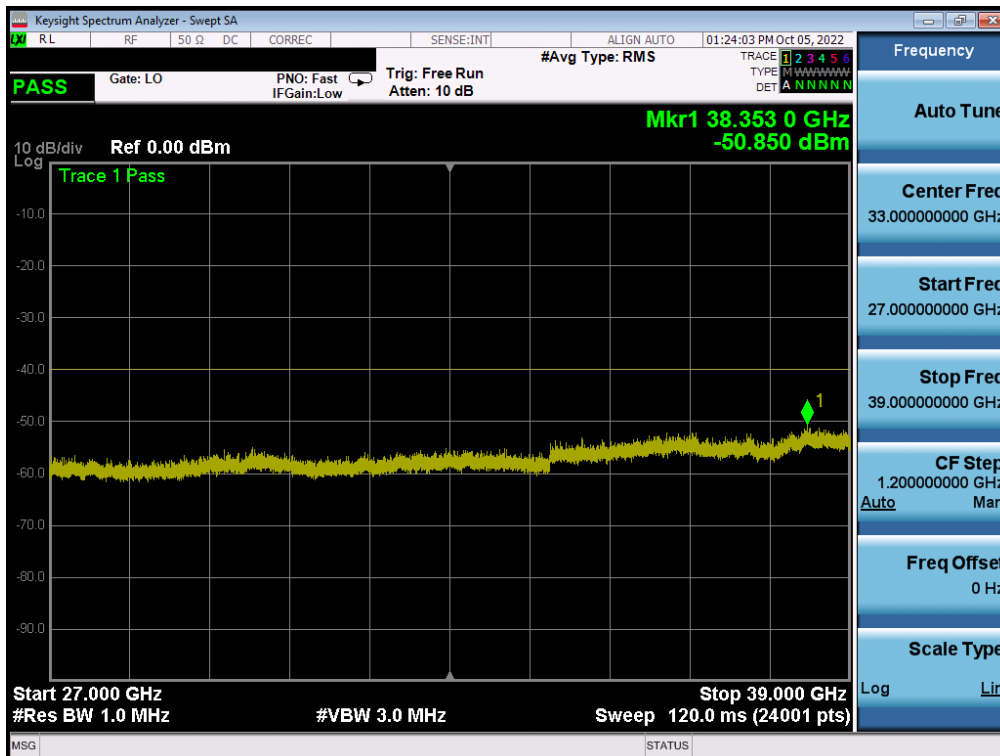


Plot 7-39. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - Mid Channel)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 40 of 136

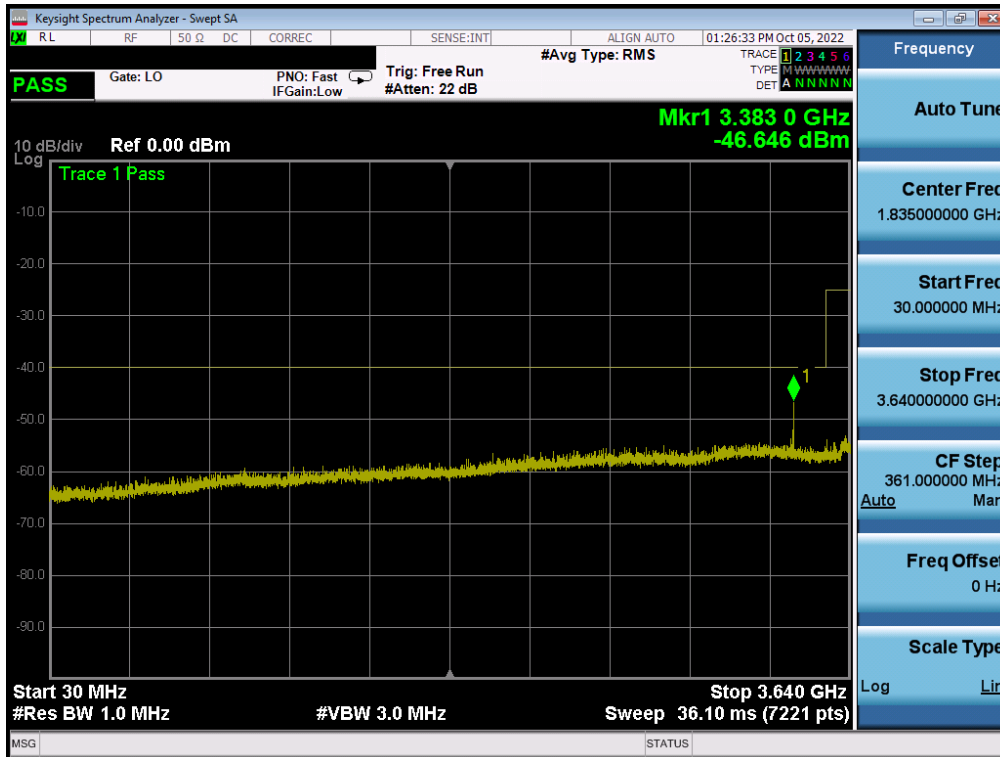


Plot 7-40. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - High Channel)

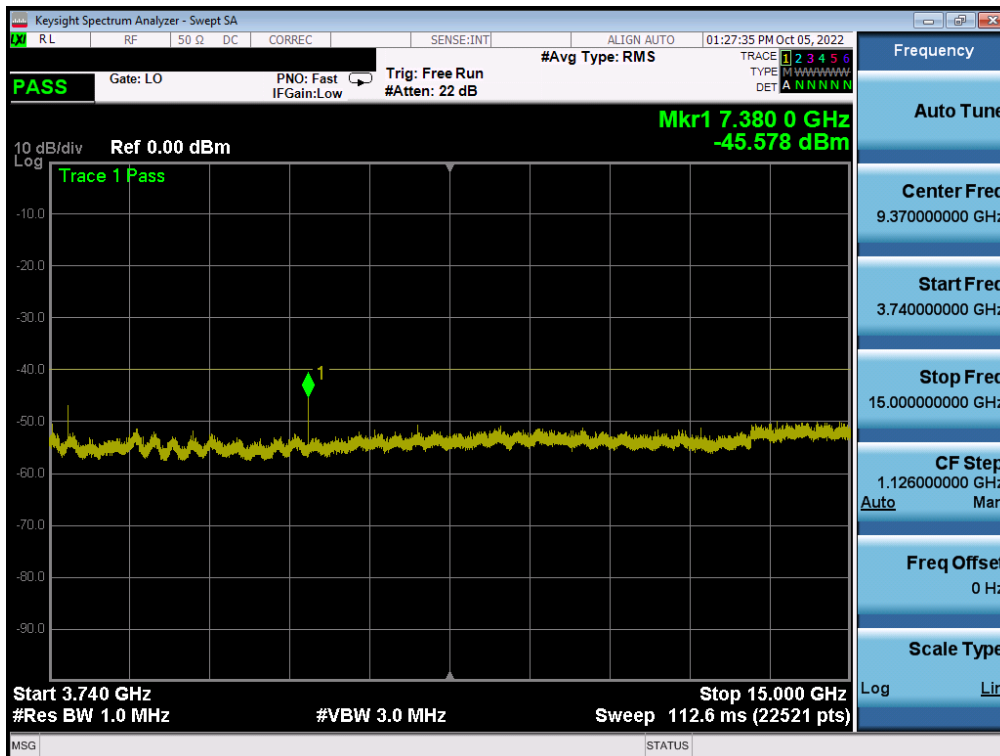


Plot 7-41. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - High Channel)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 41 of 136

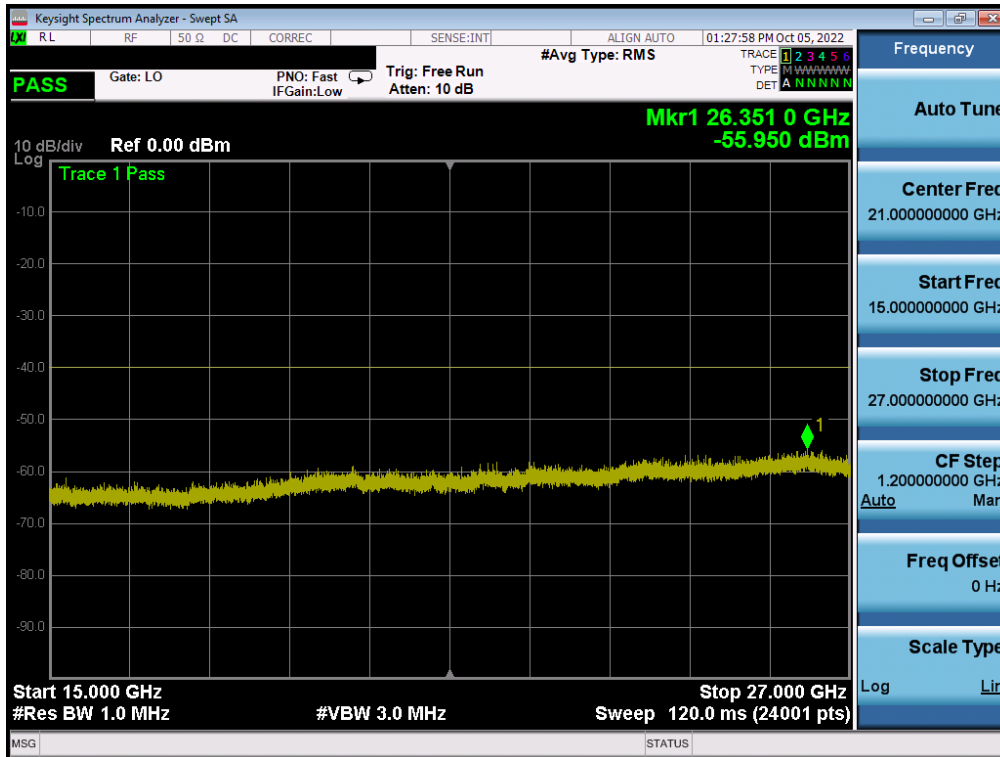



Plot 7-42. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - High Channel)

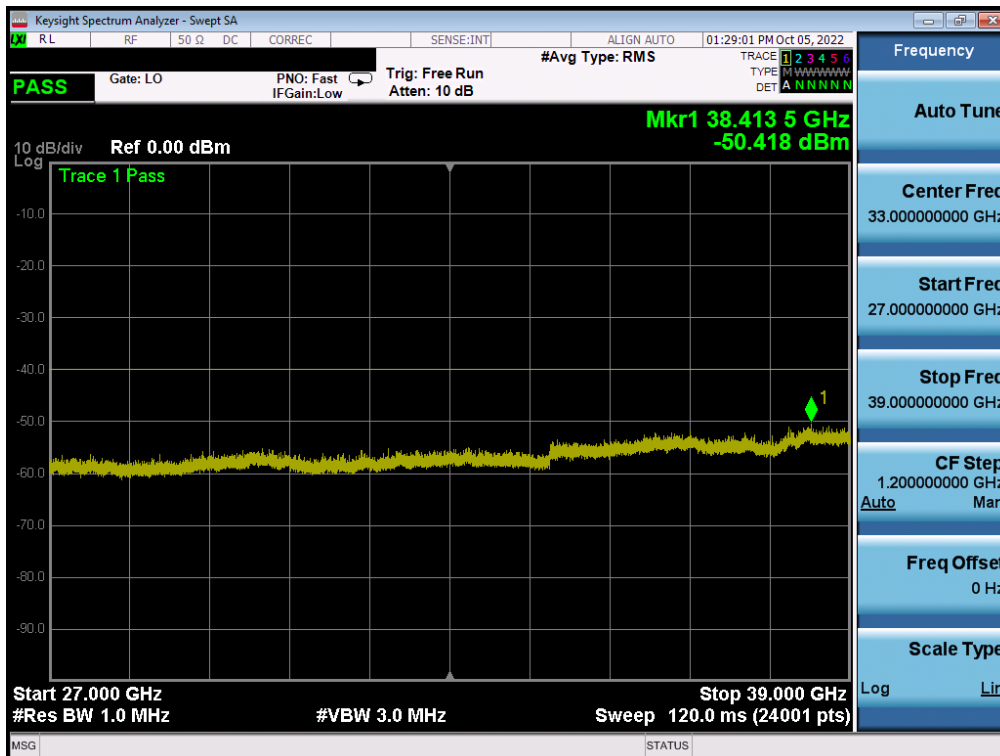


Plot 7-43. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - High Channel)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 42 of 136


ULCA LB48

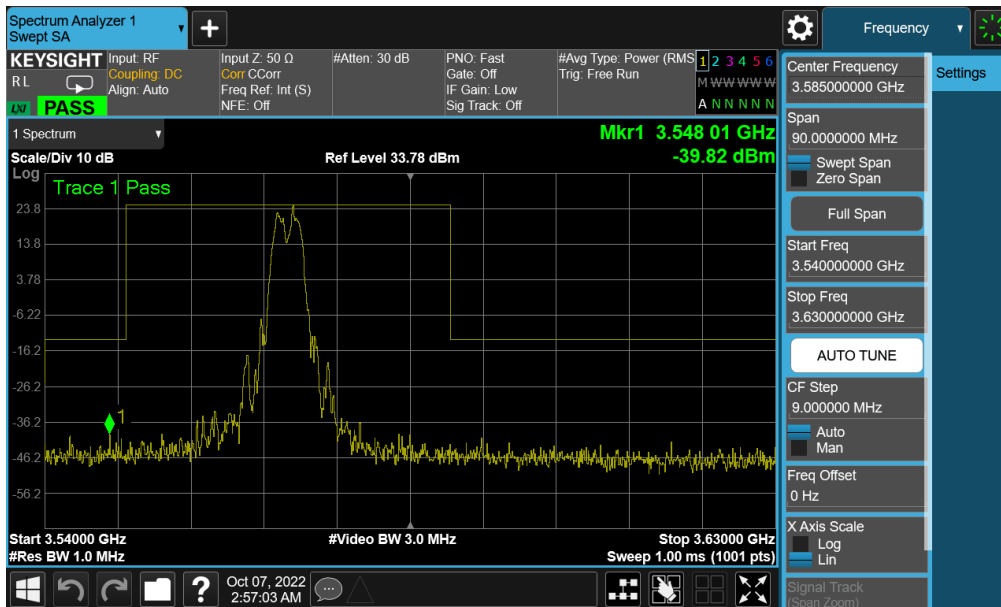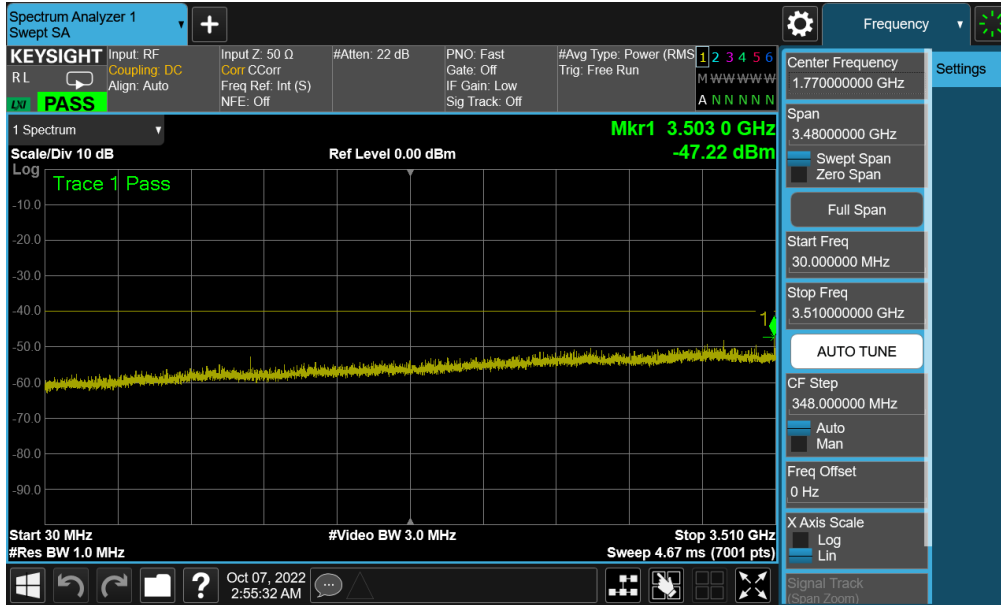

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 43 of 136

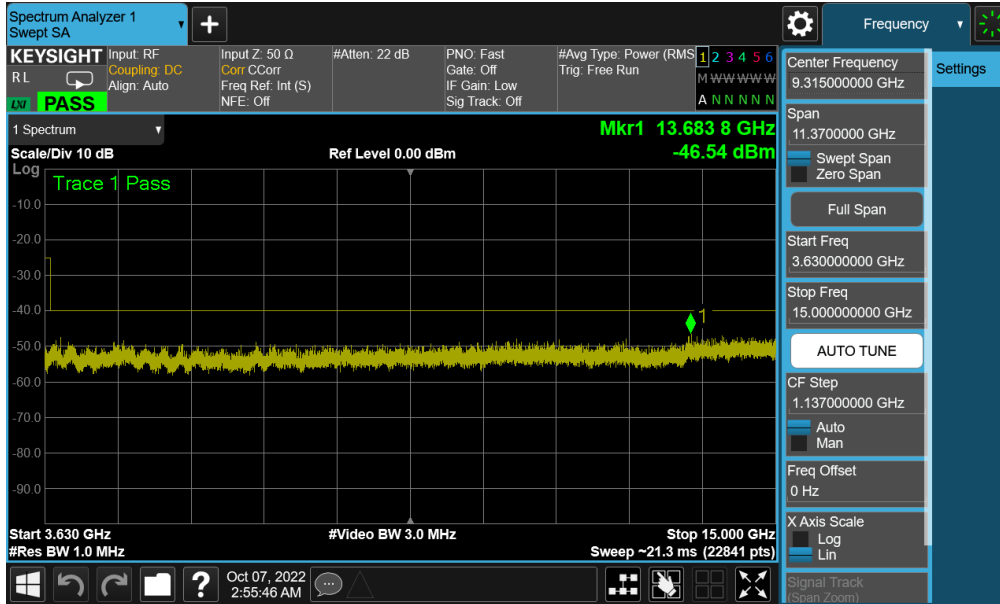


Plot 7-46. Conducted Spurious Plot (ULCA LB48 - 20+20MHz QPSK - Low Channel)

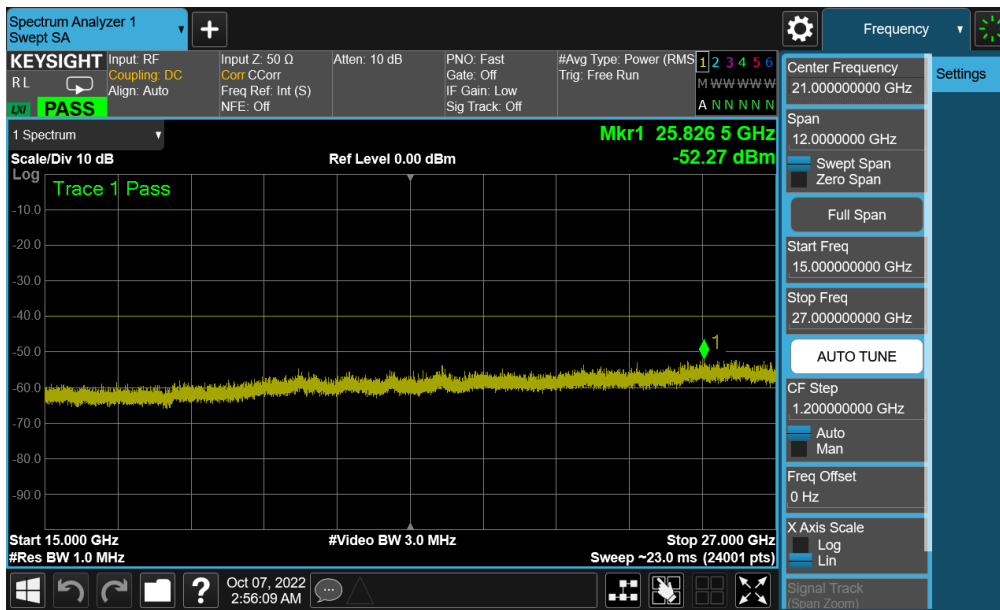


Plot 7-47. Conducted Spurious Plot (ULCA LB48 - 20+20MHz QPSK - Low Channel)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 44 of 136

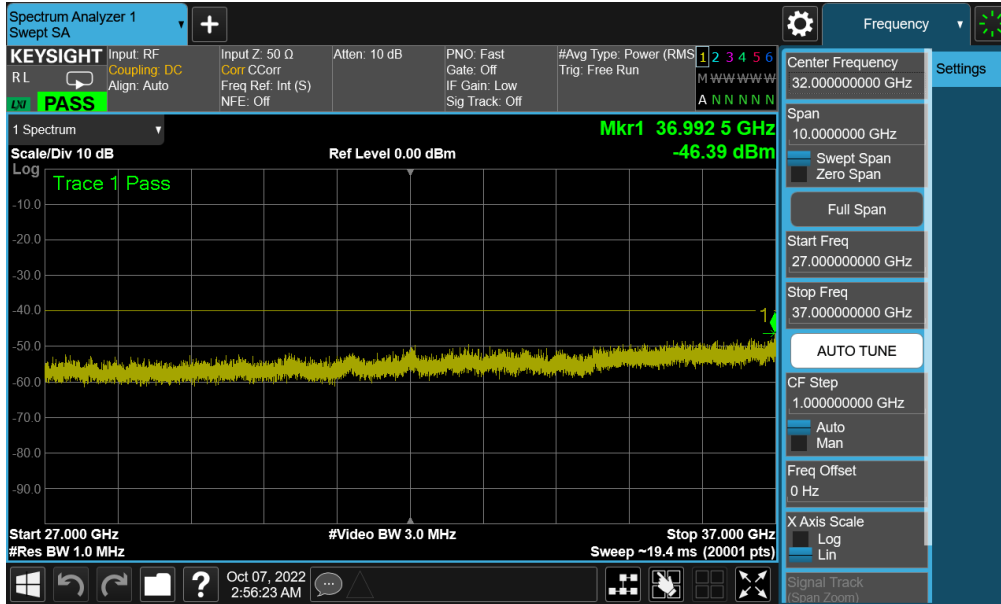


Plot 7-48. Conducted Spurious Plot (ULCA LB48 - 20+20MHz QPSK - Low Channel)

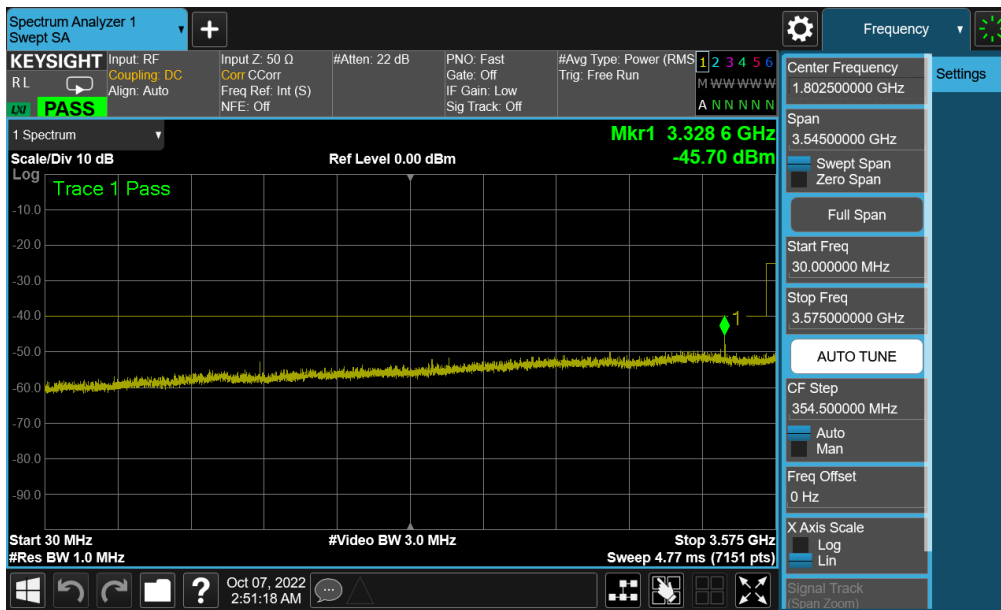


Plot 7-49. Conducted Spurious Plot (ULCA LB48 - 20+20MHz QPSK - Mid Channel)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 45 of 136

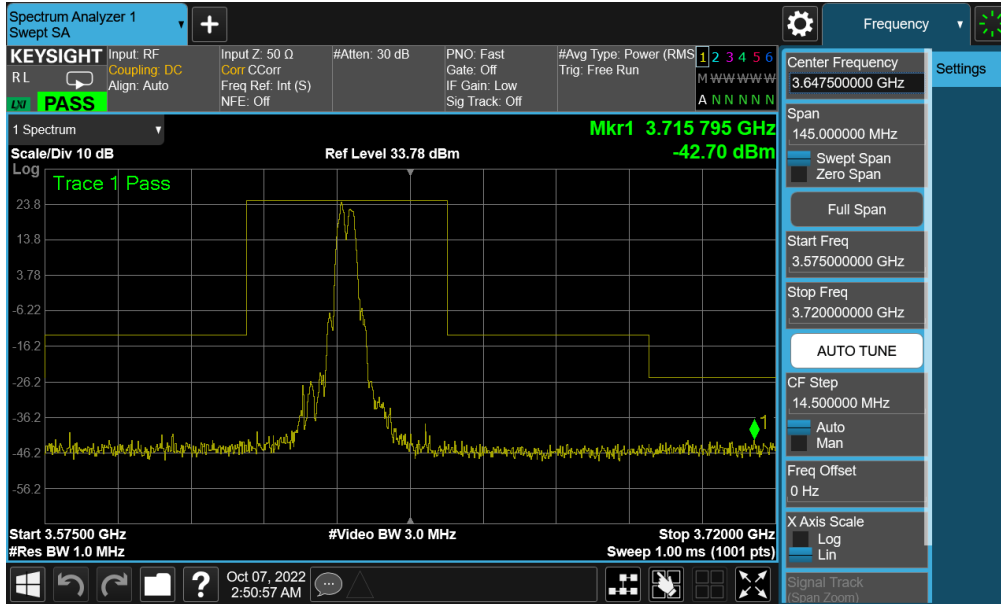


Plot 7-50. Conducted Spurious Plot (ULCA LB48 - 20+20MHz QPSK - Mid Channel)

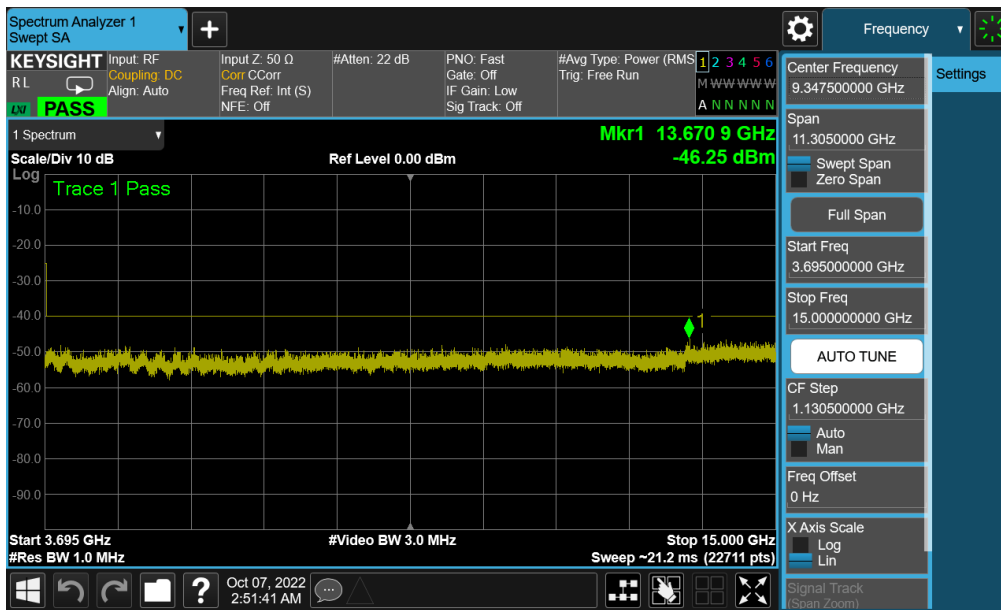


Plot 7-51. Conducted Spurious Plot (ULCA LB48 - 20+20MHz QPSK - Mid Channel)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 46 of 136

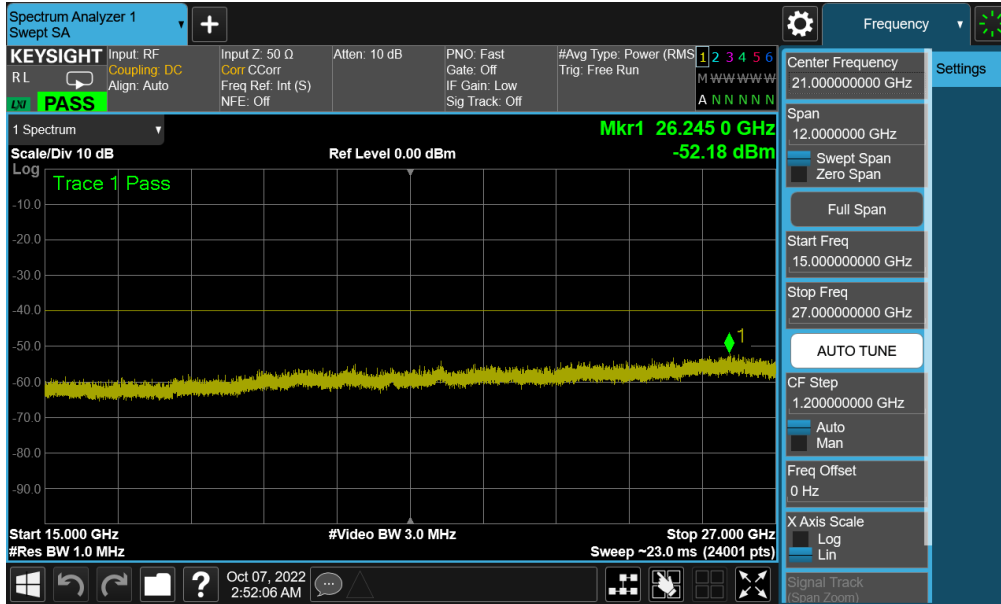


Plot 7-52. Conducted Spurious Plot (ULCA LB48 - 20+20MHz QPSK - Mid Channel)

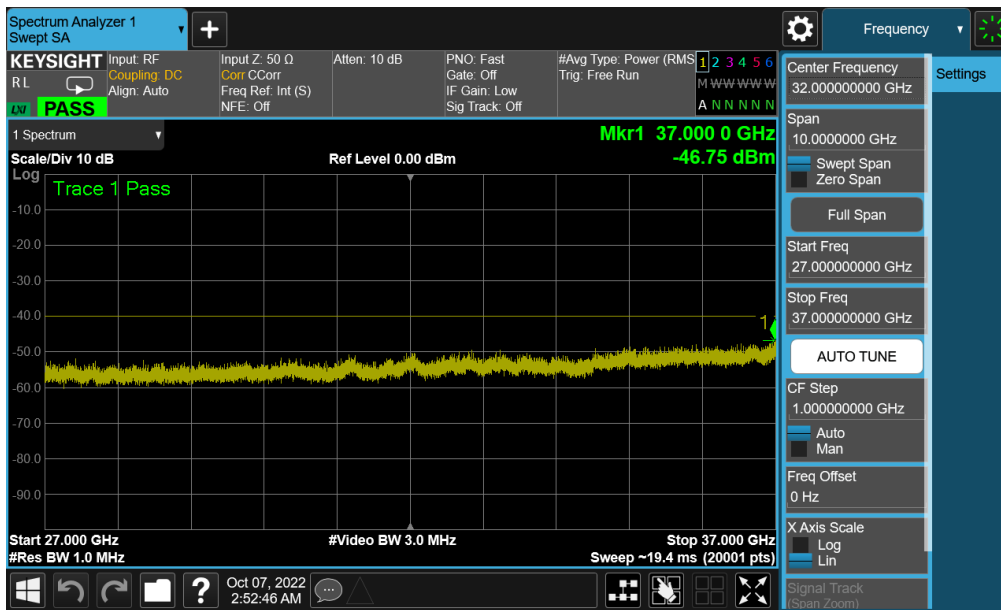


Plot 7-53. Conducted Spurious Plot (ULCA LB48 - 20+20MHz QPSK - Mid Channel)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 47 of 136


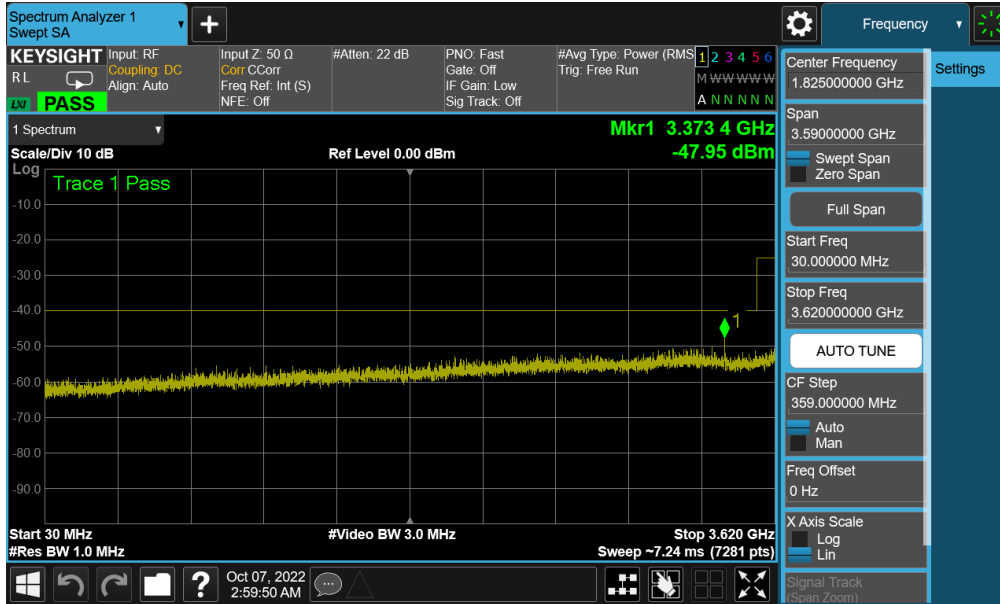


Plot 7-54. Conducted Spurious Plot (ULCA LB48 - 20+20MHz QPSK - High Channel)

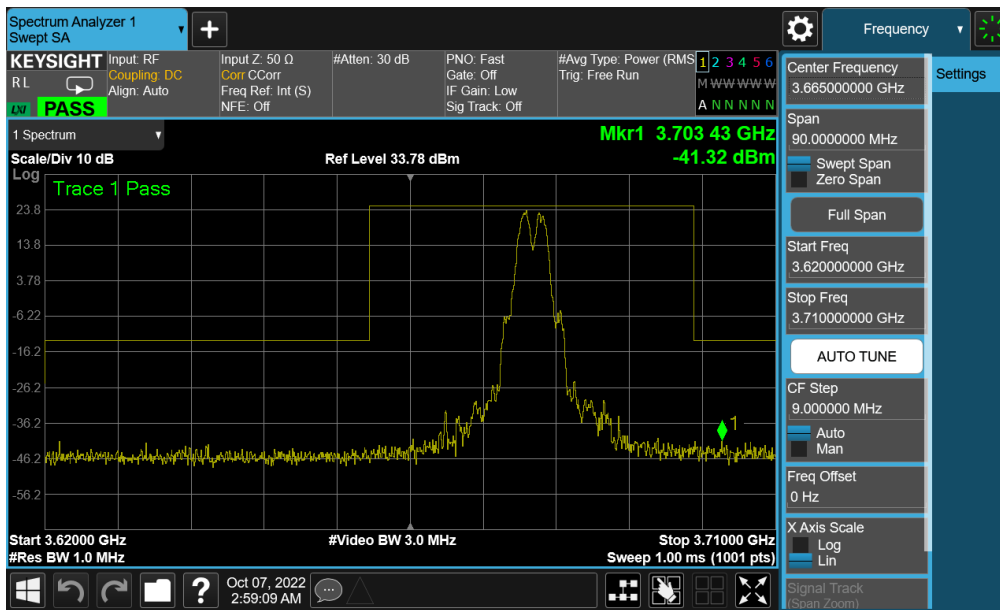


Plot 7-55. Conducted Spurious Plot (ULCA LB48 - 20+20MHz QPSK - High Channel)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 48 of 136

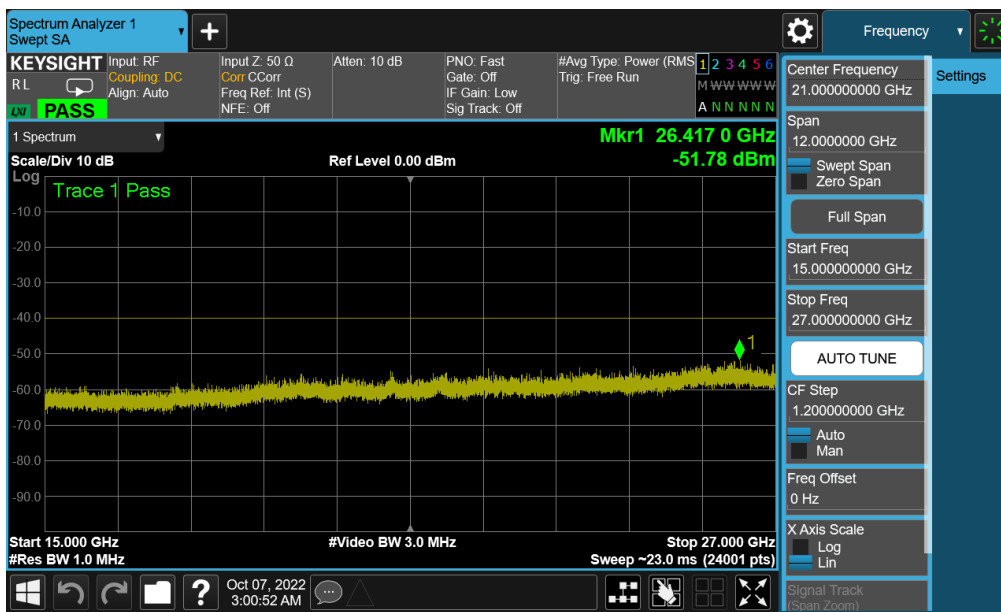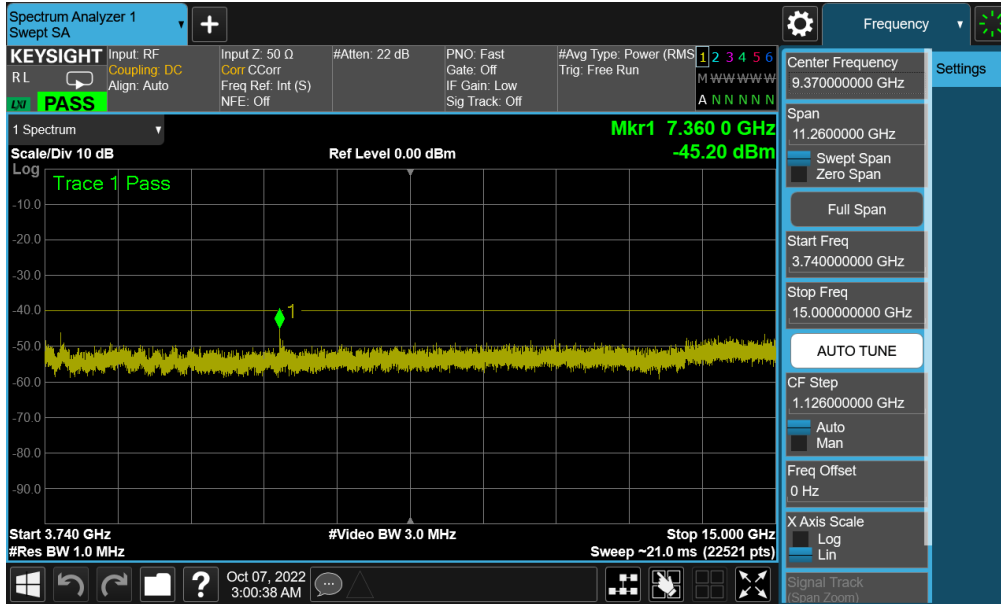


FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 49 of 136

NR Band n48 – Ant F

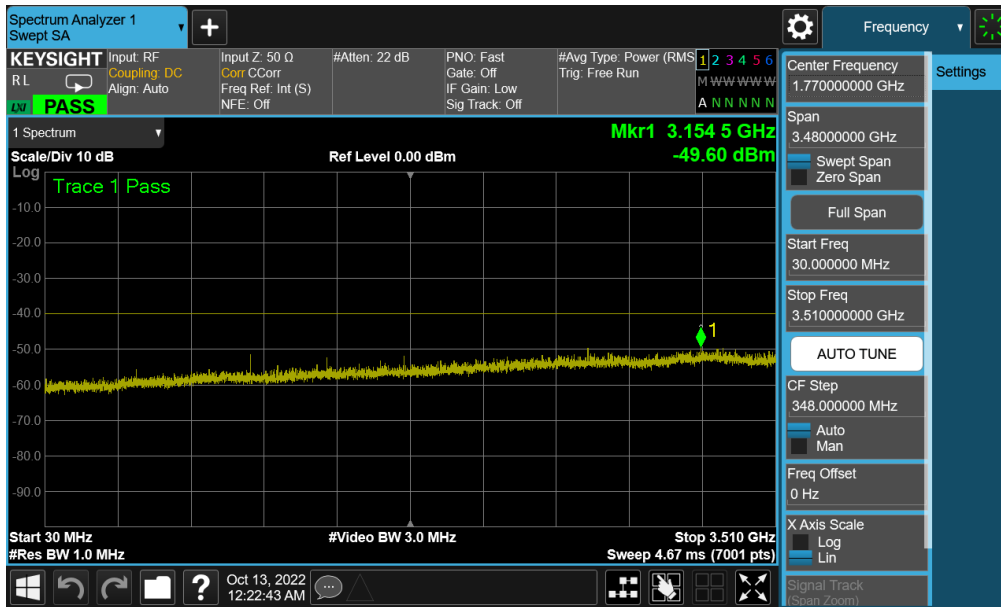


Plot 7-59. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Low Channel - Ant F)

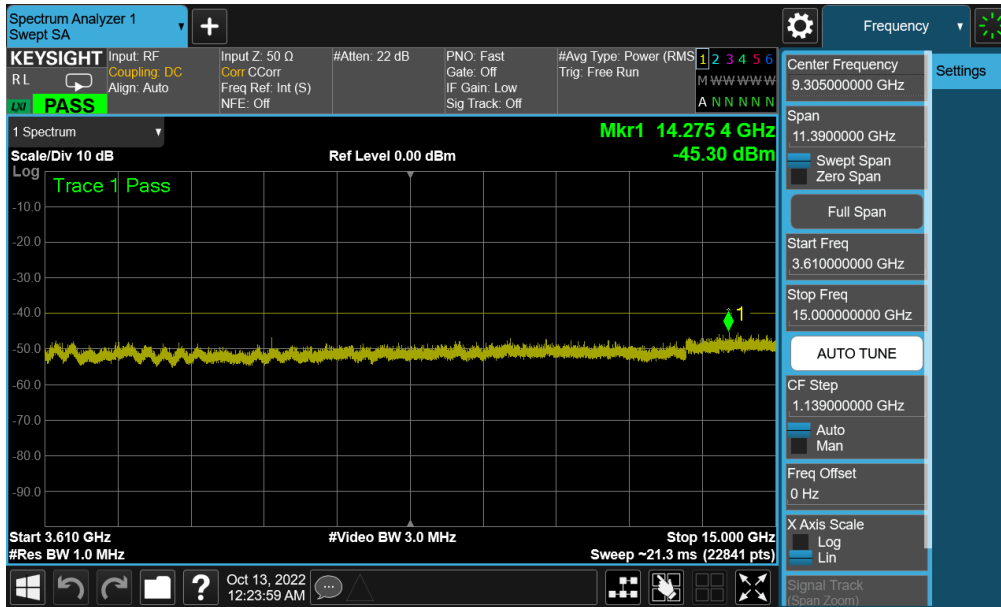


Plot 7-60. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Low Channel - Ant F)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 51 of 136

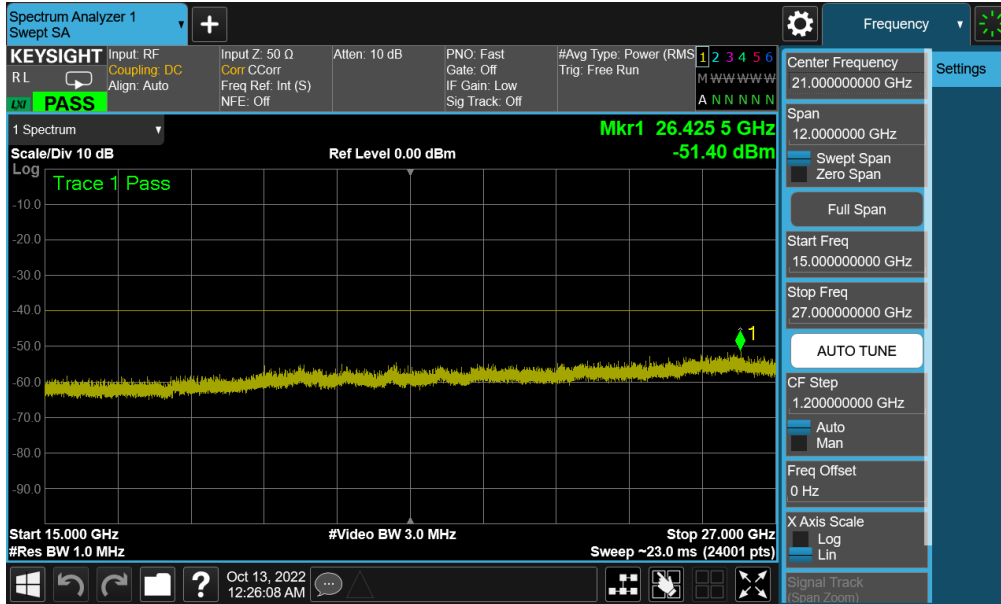


Plot 7-61. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Low Channel - Ant F)

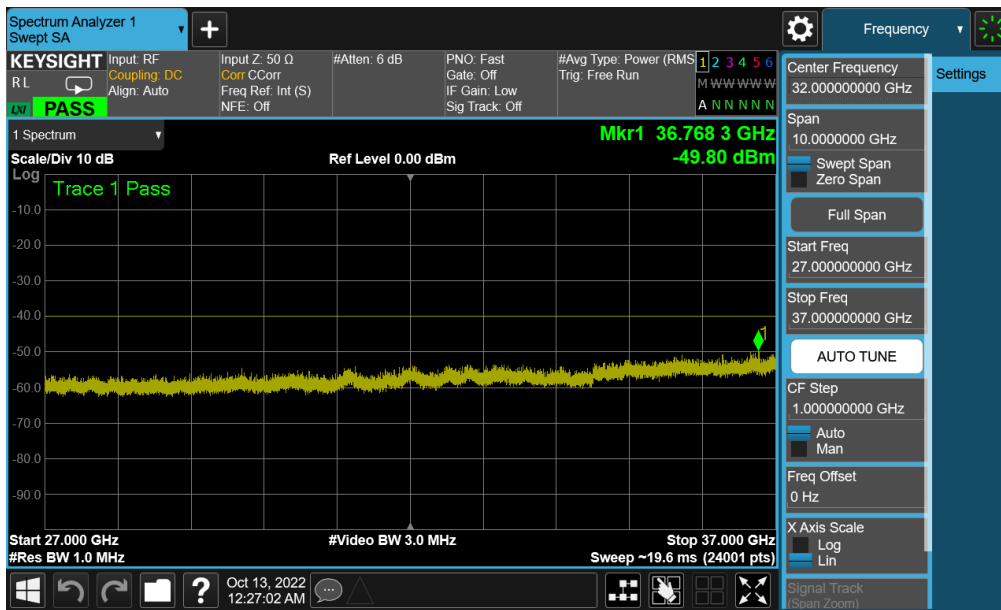


Plot 7-62. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Low Channel - Ant F)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 52 of 136

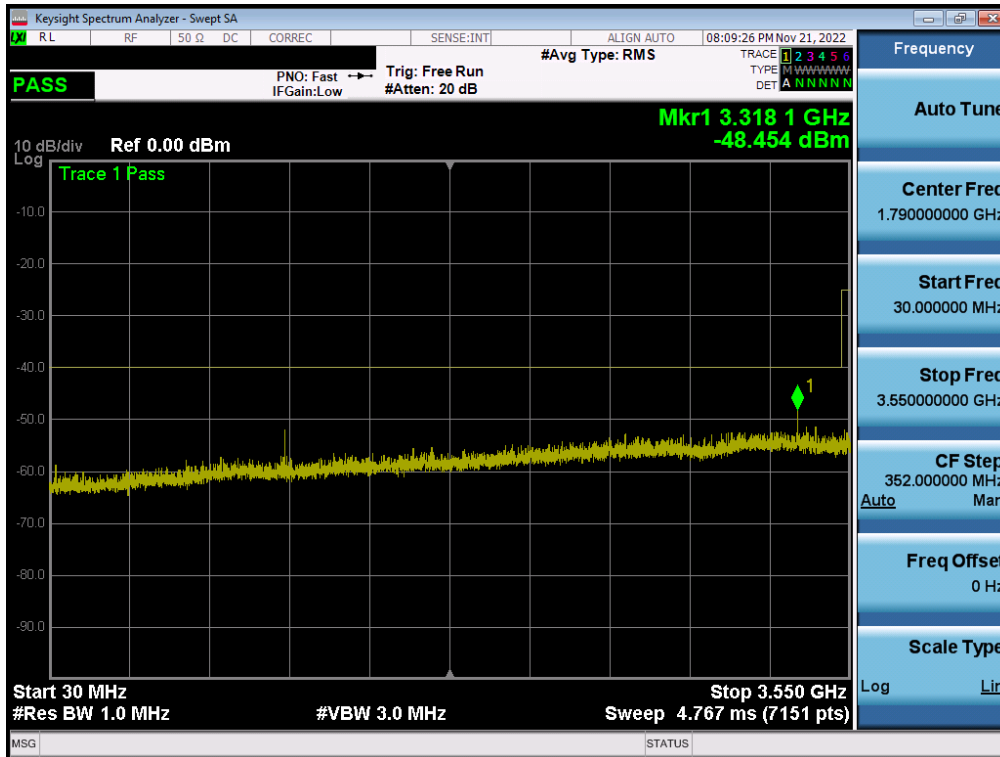


Plot 7-63. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Mid Channel - Ant F)

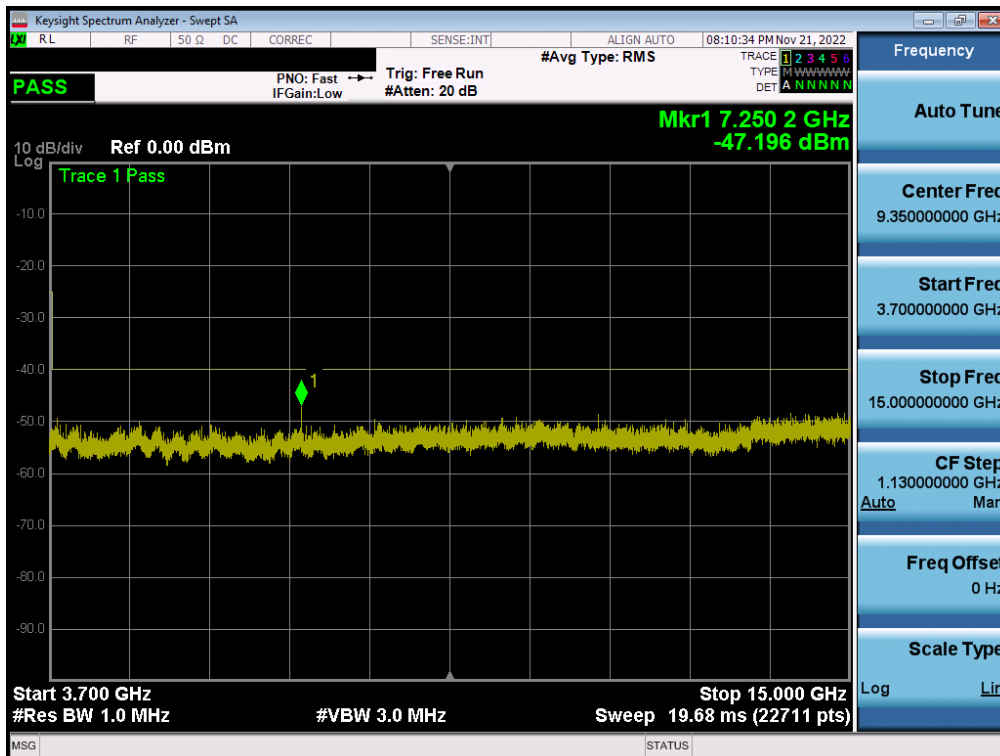


Plot 7-64. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Mid Channel - Ant F)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 53 of 136

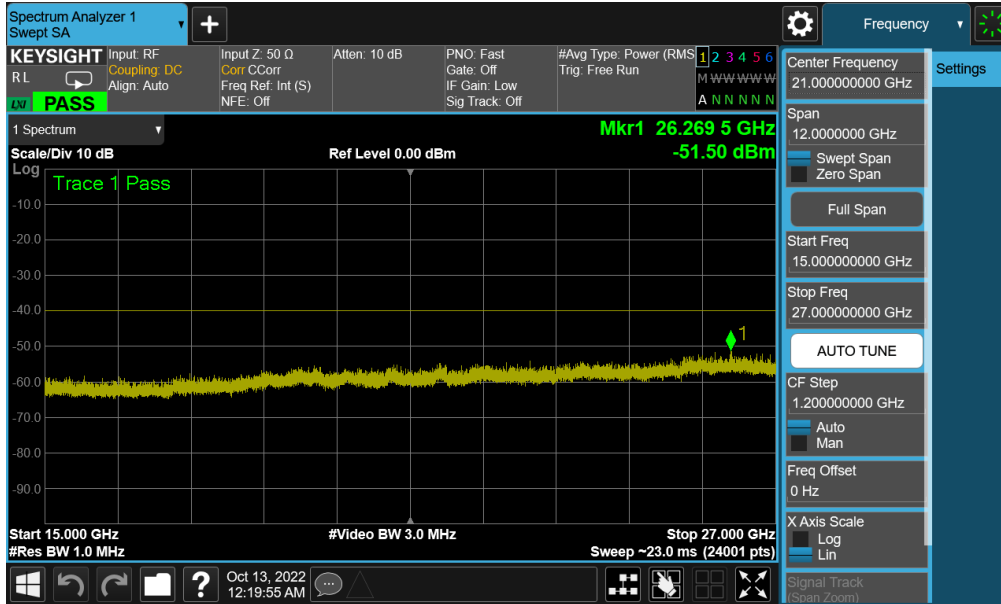


Plot 7-65. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Mid Channel - Ant F)

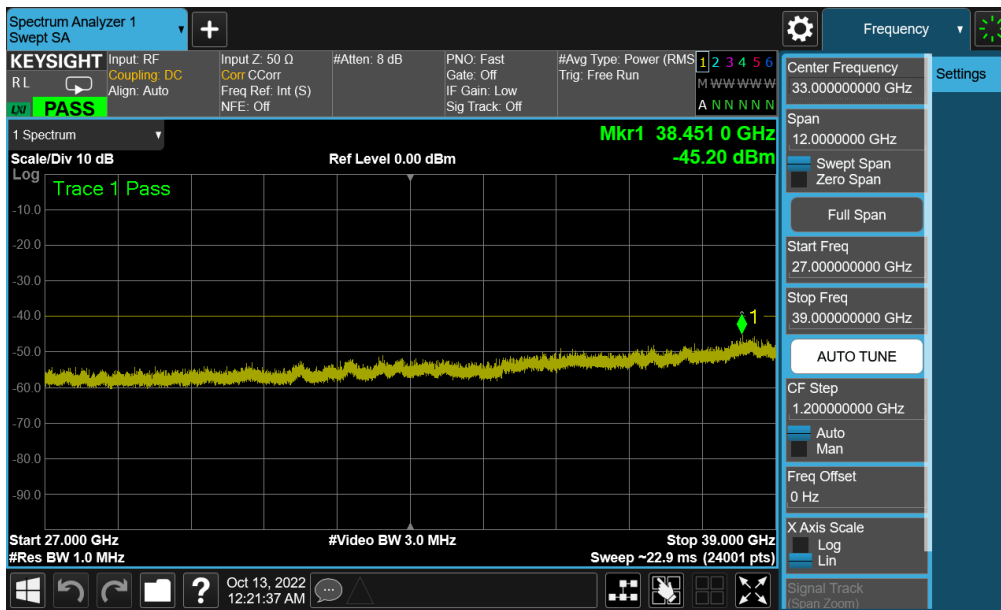


Plot 7-66. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Mid Channel - Ant F)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 54 of 136

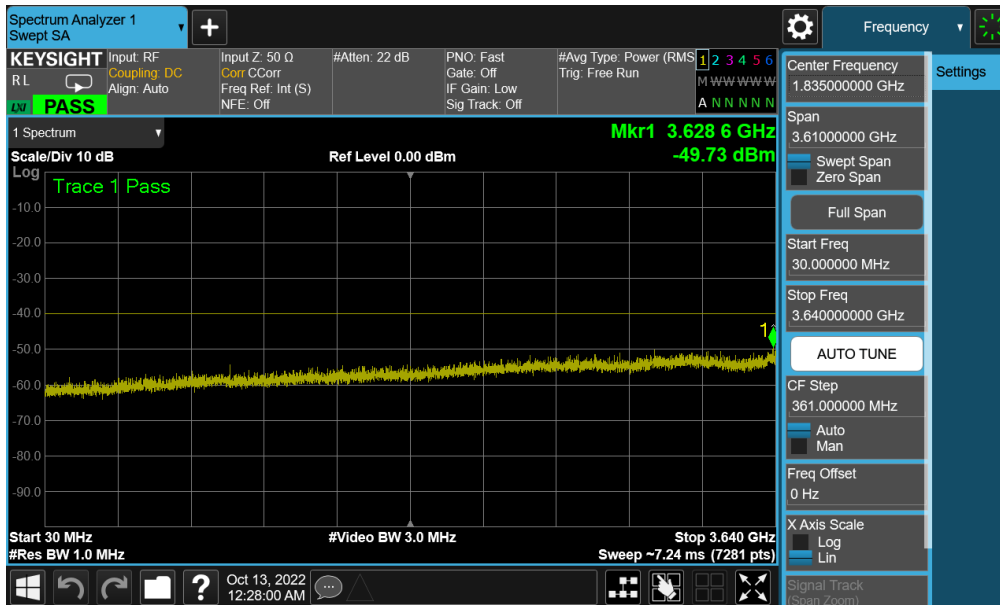


Plot 7-67. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - High Channel - Ant F)

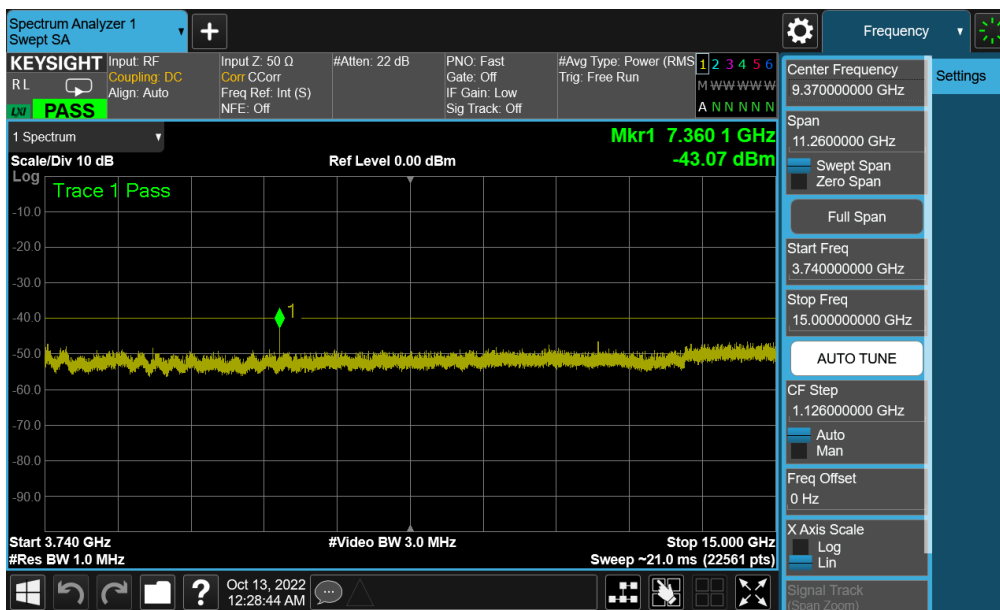


Plot 7-68. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - High Channel - Ant F)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 55 of 136

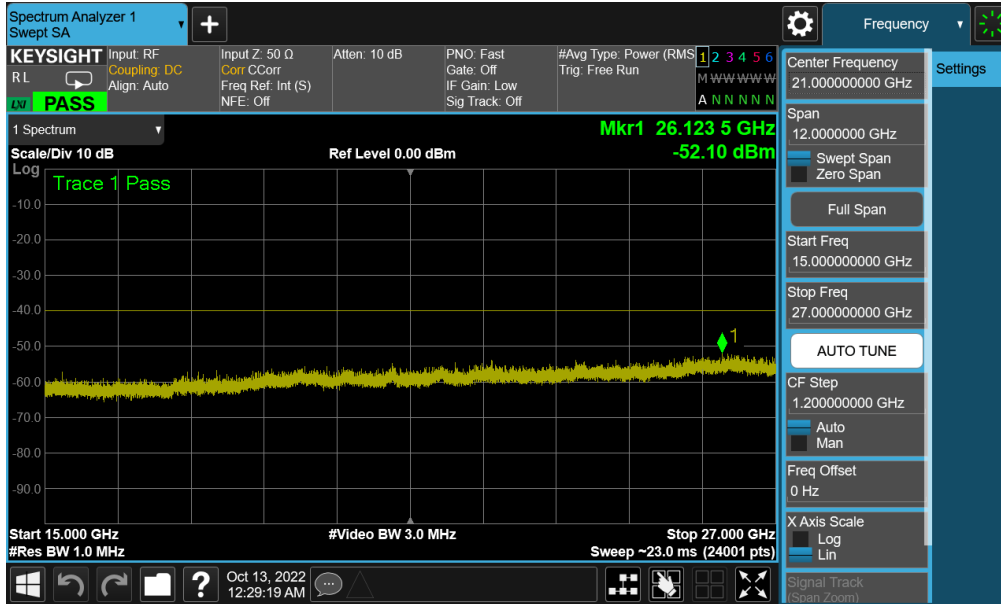


Plot 7-69. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - High Channel - Ant F)

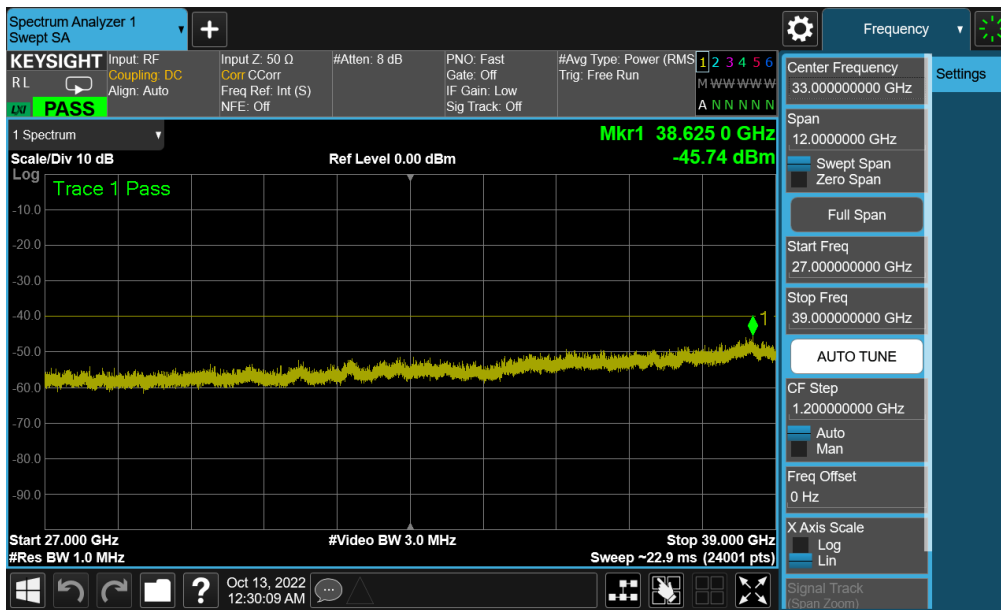


Plot 7-70. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - High Channel - Ant F)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 56 of 136

NR Band n48 – Ant C

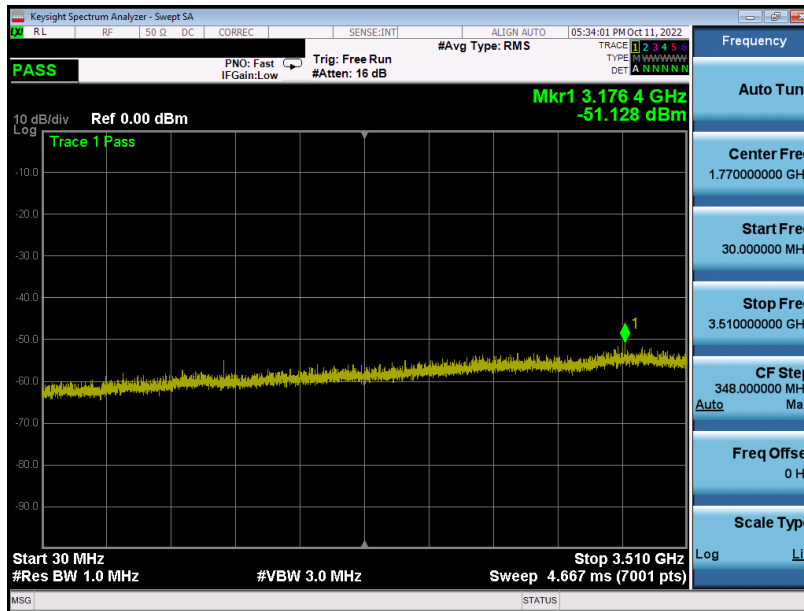

Plot 7-71. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Low Channel - Ant C)

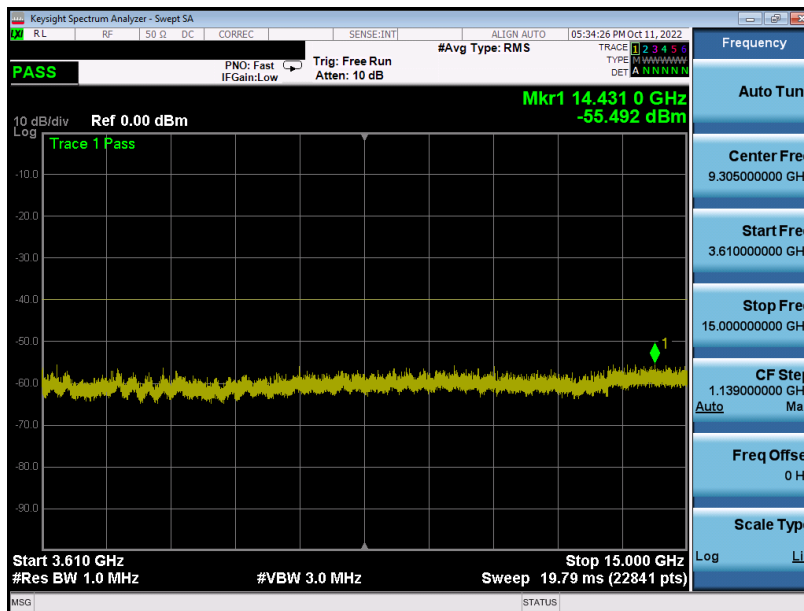

Plot 7-72. Conducted Spurious Plot (NR Band n48 - 40MHz QPSK - Low Channel - Ant C)

FCC ID: A3LSMS911U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-07.A3L	Test Dates: 10/06/2022 - 11/21/2022	EUT Type: Portable Handset	Page 57 of 136