

ELEMENT WASHINGTON DC LLC

7185 Oakland Mills Road, Columbia, MD 21046 USA Tel. 410.290.6652 / Fax 410.290.6654 http://www.element.com

MEASUREMENT REPORT FCC PART 15.407 802.11a/n/ac/ax

Applicant Name:

Samsung Electronics Co., Ltd. 129, Samsung-ro, Yeongtong-gu, Suwon-si Gyeonggi-do, 16677, Korea Date of Testing: 09/02 - 11/10/2022 Test Report Issue Date: 11/28/2022 Test Site/Location: Element lab., Columbia, MD, USA Test Report Serial No.: 1M2209010096-13-R1.A3L

FCC ID:

APPLICANT:

A3LSMS911U

Samsung Electronics Co., Ltd.

Application Type:	Certification
Model:	SM-S911U
Additional Model(s):	SM-S911U1
EUT Type:	Portable Handset
Frequency Range:	5180 – 5885MHz
Modulation Type:	OFDM
FCC Equipment Class:	Unlicensed National Information Infrastructure TX (NII)
FCC Rule Part(s):	Part 15 Subpart E (15.407)
Test Procedure(s):	ANSI C63.10-2013, KDB 789033 D02 v02r01
	KDB 662911 D01 v02r01, KDB 291074 D02 v01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

Note: This revised Test Report (S/N: 1M2209010096-13-R1.A3L) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez Executive Vice President



FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	s: EUT Type:		
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 1 of 254	

V9.0 02/01/2019



TABLE OF CONTENTS

1.0	INTRO	DUCTION	4
	1.1	Scope	4
	1.2	Element Test Location	4
	1.3	Test Facility / Accreditations	4
2.0	PROD	JCT INFORMATION	5
	2.1	Equipment Description	5
	2.2	Device Capabilities	5
	2.3	Antenna Description	7
	2.4	Test Configuration	7
	2.5	Software and Firmware	7
	2.6	EMI Suppression Device(s)/Modifications	7
3.0	DESC	RIPTION OF TESTS	8
	3.1	Evaluation Procedure	8
	3.2	AC Line Conducted Emissions	8
	3.3	Radiated Emissions	9
	3.4	Environmental Conditions	9
4.0	ANTEN	INA REQUIREMENTS	10
5.0	MEAS	JREMENT UNCERTAINTY	11
6.0	TEST I	EQUIPMENT CALIBRATION DATA	12
7.0	TEST I	RESULTS	13
	7.1	Summary	13
	7.2	26dB Bandwidth Measurement – 802.11a/n/ac/ax	14
	7.3	6dB Bandwidth Measurement – 802.11a/n/ac/ax	73
	7.4	UNII Output Power Measurement – 802.11a/n/ac/ax	108
	7.5	Maximum Power Spectral Density – 802.11a/n/ac/ax	114
	7.6	Radiated Spurious Emission Measurements – Above 1GHz	205
	7.6.1	MIMO Radiated Spurious Emission Measurements	209
	7.6.2	Simultaneous Tx Radiated Spurious Emissions Measurements	222
	7.6.3	MIMO Radiated Band Edge Measurements (20MHz BW)	226
	7.6.4	MIMO Radiated Band Edge Measurements (40MHz BW)	230
	7.6.5	MIMO Radiated Band Edge Measurements (80MHz BW)	234
	7.6.6	MIMO Radiated Band Edge Measurements (160MHz BW)	238
	7.7	Radiated Spurious Emissions Measurements – Below 1GHz	241
	7.8	Line-Conducted Test Data	246
8.0	CONC	LUSION	254

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 2 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 2 of 254
			V9.0 02/01/2019



MEASUREMENT REPORT

			MIMO		
UNII Band	Channel Bandwidth (MHz)	Tx Frequency (MHz)	Max. Power (mW)	Max. Power (dBm)	
1		5180 - 5240	112.460	20.51	
2A		5260 - 5320	112.980	20.53	
2C	20	5500 - 5720	124.451	20.95	
3		5745 - 5825	116.681	20.67	
4		5845 - 5885	100.693	20.03	
1		5190 - 5230	96.828	19.86	
2A		5270 - 5310	98.628	19.94	
2C	40	5510 - 5710	98.628	19.94	
3		5755 - 5795	95.280	19.79	
4		5835 - 5875	78.524	18.95	
1		5210	73.790	18.68	
2A		5290	73.961	18.69	
2C	80	5530 - 5690	77.804	18.91	
3		5775	71.779	18.56	
4		5855	56.885	17.55	
1		5250	73.451	18.66	
2B	160	5570	74.989	18.75	
4		5815	64.121	18.07	

EUT Overview

Note: UNII Band 4 powers shown in the table above are EIRP values

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dage 2 of 254	
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 3 of 254	
		-	V9 0 02/01/2019	



1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

These measurement tests were conducted at the Element laboratory located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 4 of 254	
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Fage 4 01 254	
			\/0.0.02/01/2010	

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.



PRODUCT INFORMATION 2.0

2.1 **Equipment Description**

The Equipment Under Test (EUT) is the Samsung Portable Handset FCC ID: A3LSMS911U. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

Test Device Serial No.: 0262M, 0280M, 0219M, 0210M, 0232M

2.2 **Device Capabilities**

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR (FR1 and FR2), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz and 6GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer.

	Band 1		Band 2A		Band 2C		Band 3		Band 4
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	9 5745	169	5845
:	:	:	:	:	:	:	:	:	:
40	5200	56	5280	120	5600	157	7 5785	173	5865
:	:	:	:	:	:	:	:	:	:
48	5240	64	5320	144	5720	165	5 5825	177	5885

Table 2-1. 802.11a/n/ac/ax (20MHz) Frequency / Channel Operations

	Band 1
Ch.	Frequency (MHz)
38	5190
:	:
46	5230

	Band 2
Ch.	Frequenc (MHz)
54	5270
:	:
62	5310

Ch.

58

Band 2A Frequency

(MHz)

5290

A		В
су	Ch.	F
	102	
	:	
	118	
	:	
	142	

	Band 2C	
	Frequency (MHz)	
2	5510	
	:	
8	5590	
	:	
2	5710	

	Band 3
Ch.	Frequency (MHz)
151	5755
:	:
159	5795

Band 4

Ch.	Frequency (MHz)
167	5835
:	:
175	5875

Table 2-2. 802.11n/ac/ax (40MHz BW) Frequency / Channel Operations

Band 20

	Band 1
Ch.	Frequency (MHz)

5210

42

	Danu 20
Ch.	Frequency (MHz)
106	5530
•••	:
138	5690

	Band 3		Band 4
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
155	5775	171	5855

Table 2-3. 802.11ac/ax (80MHz BW) Frequency / Channel Operations

	Band 1/2A		Band 2C				Band 3/4
Ch.	Frequency (MHz)		Ch.	Frequency (MHz)		Ch.	Frequency (MHz)
50	5250		114	5570		163	5815
	Table 2-4. 802.11ac/ax (160MHz BW) Frequency / Channel Operations						

MEASUREMENT REPORT Approved by: FCC ID: A3LSMS911U (CERTIFICATION) **Technical Manager** EUT Type: Test Report S/N: Test Dates: Page 5 of 254 1M2209010096-13-R1.A3L 09/02 - 11/08/2022 Portable Handset

V9.0 02/01/2019



Notes:

 5GHz NII operation is possible in 20MHz channel bandwidth. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of ANSI C63.10-2013 and KDB 789033 D02 v02r01. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Maximum Achievable Duty Cycles					
Duty Cycle [%]					
ode/Band	МІМО				
а	93.65				
n (HT20)	92.79				
ac (HT20)	92.70				
ax (HT20)	99.10				
n (HT40)	92.17				
ac (HT40)	92.57				
ax (HT40)	99.15				
ac (HT80)	92.39				
ax (HT80)	99.14				
ac (HT160)	92.67				
ax (HT160)	99.23				
	ode/Band a n (HT20) ac (HT20) ax (HT20) n (HT40) ac (HT40) ac (HT40) ac (HT80) ax (HT80) ac (HT160)				

Table 2-5. Measured Duty Cycles

2. The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM		CDD	
		ANT1	ANT2	ANT1	ANT2	ANT1	ANT2
11ax (20MHz)		×	×	✓	✓	✓	✓
5GHz	11ax (40MHz)	×	×	✓	✓	✓	✓
	11ax (80MHz)	×	×	✓	✓	✓	✓
	11ax (160MHz)	×	×	✓	✓	✓	✓

 Table 2-6. Frequency / Channel Operations

✓ = Support ; × = NOT Support
 SISO = Single Input Single Output
 SDM = Spatial Diversity Multiplexing – MIMO function
 CDD = Cyclic Delay Diversity – 2Tx Function

3. This device supports simultaneous transmission operation, which allows for two SISO channels to operate independent of one another in the 2.4GHz (WLAN & BT) and 5GHz bands simultaneously on each antenna. The following tables show the worst case configurations determined during testing. The data for these configurations is contained in this test report. The BT + 5GHz case is not considered as worst case since the BT power is lower than the 2.4GHz WLAN power.

FCC ID: A3LSMS911U		MEASUREMENT REPORT (CERTIFICATION)	
Test Report S/N:	Test Dates:	EUT Type:	Dage 6 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 6 of 254
		·	\/0.0.02/01/2010



Configuration 1: MIMO transmitting in 2.4GHz mode and MIMO in 5GHz mode

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1, 2	1, 2
Channel	11	120
Operating Frequency (MHz)	2462	5600
Data Rate (Mbps)	1Mbps	6Mbps
Mode	802.11b	802.11a

Table 2-7. Config-1 (MIMO 2.4GHz & MIMO 5GHz)

Configuration 2: MIMO transmitting in 2.4GHz mode and MIMO in 6GHz mode

Description	2.4 GHz Emission	6 GHz Emission
Antenna	1, 2	1, 2
Channel	6	25
Operating Frequency (MHz)	2437	6075
Data Rate (Mbps)	1Mbps	6Mbps
Mode	802.11b	802.11a

Table 2-8. Config-2 (MIMO 2.4GHz & MIMO 6GHz)

2.3 Antenna Description

Following antenna was used for the testing.

Frequency [GHz]	Antenna 1 Gain (dBi)	Antenna 2 Gain (dBi)	Directional Gain (dBi)
5.20	-5.07	-3.05	-0.99
5.30	-3.14	-2.12	0.40
5.50	-2.69	-5.11	-0.81
5.80	-2.32	-5.07	-0.58
5.85	-3.14	-4.77	-0.91

Table 2-9. Antenna Peak Gain

2.4 Test Configuration

The EUT was tested per the guidance of KDB 789033 D02 v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 7.6 for radiated emissions test setups, and 7.2, 7.3, 7.4, and 7.5 for antenna port conducted emissions test setups.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.5 Software and Firmware

The test was conducted with software/firmware version S911USQU0AVJM installed on the EUT.

2.6 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 7 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 7 of 254
<u></u>	•	-	V9.0 02/01/2019



3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v02r01 and KDB 271094 D02 v01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, $50\Omega/50\mu$ H Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.7. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 9 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 8 of 254
<u></u>	•	-	V9.0 02/01/2019



3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01 v01r01.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dage 0 of 254	
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 9 of 254	
<u></u>	•		V9.0 02/01/2019	



4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antennas of the EUT are permanently attached.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 10 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Fage 10 01 254
			1/0 0 02/01/2010



5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of k = 2 to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (±dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 11 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022 Portable Handset		Page 11 of 254
		-	V9 0 02/01/2019



6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	WL25-1	Conducted Cable Set (25GHz)	7/29/2022	Annual	7/29/2023	WL25-1
-	WL25-3	Conducted Cable Set (25GHz)	7/29/2022	Annual	7/29/2023	WL25-3
-	WL25-4	Conducted Cable Set (25GHz)	7/29/2022	Annual	7/29/2023	WL25-4
Agilent	N9038A	MXE EMI Receiver	1/21/2022	Annual	1/21/2023	MY51210133
Anritsu	ML2495A	Power Meter	5/9/2022	Annual	5/9/2023	1328004
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	4/13/2022	Biennial	4/13/2024	121034
Emco	3115	Horn Antenna (1-18GHz)	8/8/2022	Biennial	8/8/2024	9704-5182
Emco	3116	Horn Antenna (18 - 40GHz)	7/20/2021	Biennial	7/20/2023	9203-2178
ETS-Lindgren	3816/2NM	Line Impedance Stabilization Network	8/11/2022	Biennial	8/11/2024	114451
Keysight Technologies	N9030A	PXA Signal Analyzer (3Hz-26.5GHz)	9/6/2022	Annual	9/6/2023	MY54490576
Keysight Technologies	N9020A	MXA Signal Analyzer	3/15/2022	Annual	3/15/2023	MY54500644
Pasternack	NMLC-2	Line Conducted Emissions Cable (NM)	12/19/2021	Annual	12/19/2022	NMLC-2
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	8/29/2022	Annual	8/29/2023	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	8/25/2022	Annual	8/25/2023	100348
Sunol	DRH-118	Horn Antenna (1-18 GHz)	1/14/2022	Biennial	1/14/2024	A042511

Table 6-1. Annual Test Equipment Calibration Schedule

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dage 12 of 254	
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 12 of 254	
	•		V9.0 02/01/2019	



7.0 TEST RESULTS

7.1 Summary

Company Name:	Samsung Electronics Co., Ltd.
FCC ID:	<u>A3LSMS911U</u>
FCC Classification:	Unlicensed National Information Infrastructure (UNII)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
N/A	RSS-Gen [6.6]	26dB Bandwidth	N/A		PASS	Section 7.2
15.407(e)	RSS-Gen [6.6]	6dB Bandwidth	>500kHz(5725-5850MHz)		PASS	Section 7.3
15.407 (a.1.iv), (a.2), (a.3)	RSS-247 [6.2]	Maximum Conducted Output Power	Maximum conducted powers must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])	CONDUCTED	PASS	Section 7.4
15.407 (a.1.iv), (a.2), (a.3)	RSS-247 [6.2]	Maximum Power Spectral Density	Maximum power spectral density must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.5
15.407(h)	RSS-247 [6.3]	Dynamic Frequency Selection	See DFS Test Report			See DFS Test Report
15.407(b.1), (2), (3), (4)	RSS-247 [6.2]	Undesirable Emissions	Undesirable emissions must meet the limits detailed in 15.407(b) (RSS-247 [6.2])		PASS	Section 7.6
15.205, 15.407(b.1), (4), (5), (6)	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])	RADIATED	PASS	Section 7.6
15.407	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 (RSS-Gen [8.8]) limits	LINE CONDUCTED	PASS	Section 7.7

Table 7-1. Summary of Test Results

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "UNII Automation," Version 4.7.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 1.5.0.

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Deg. 12 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 13 of 254
			1/0.0.02/01/2010

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.



26dB Bandwidth Measurement - 802.11a/n/ac/ax 7.2

RSS-Gen [6.2]

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

Test Procedure Used

ANSI C63.10-2013 - Section 12.4 KDB 789033 D02 v02r01 - Section C

Test Settings

- 1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 26. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- RBW = approximately 1% of the emission bandwidth
- 3. VBW > 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 14 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 14 of 254
	•	·	\/0.0.02/01/2010



MIMO Antenna-1 26dB Bandwidth Measurements


	Frequency	Channel			Measured 26dB
	[MHz]	No.	802.11 Mode	Data Rate [Mbps]	Bandwidth [MHz]
	5180	36	а	6	19.49
	5200	40	а	6	18.92
	5240	48	а	6	19.55
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	20.29
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	20.52
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	20.14
.	5180	36	ax (20MHz)	6.5/7.2 (MCS0)	20.64
Band	5200	40	ax (20MHz)	6.5/7.2 (MCS0)	21.65
B	5240	48	ax (20MHz)	6.5/7.2 (MCS0)	20.91
	5190	38	n (40MHz)	13.5/15 (MCS0)	39.74
	5230	46	n (40MHz)	13.5/15 (MCS0)	39.27
	5190	38	ax (40MHz)	13.5/15 (MCS0)	40.34
	5230	46	ax (40MHz)	13.5/15 (MCS0)	40.19
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	81.31
	5210	42	ax (80MHz)	29.3/32.5 (MCS0)	81.64
P A	5250	50	ac (160MHz)	58.5/65 (MCS0)	165.20
Band 1/2A	5250	50	ax (160MHz)	58.5/65 (MCS0)	161.20
	5260	52	a	6	19.48
	5280	56	а	6	19.37
	5320	64	а	6	19.26
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	20.14
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	19.94
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	20.66
A	5260	52	ax (20MHz)	6.5/7.2 (MCS0)	21.33
Band 2A	5280	56	ax (20MHz)	6.5/7.2 (MCS0)	20.92
Bar	5320	64	ax (20MHz)	6.5/7.2 (MCS0)	21.53
	5270	54	n (40MHz)	13.5/15 (MCS0)	39.33
	5310	62	n (40MHz)	13.5/15 (MCS0)	39.41
	5270	54	ax (40MHz)	13.5/15 (MCS0)	40.10
	5310	62	ax (40MHz)	13.5/15 (MCS0)	39.96
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	81.69
	5290	58	ax (80MHz)	29.3/32.5 (MCS0)	81.86
	5500	100	a	6	25.48
	5600	120	а	6	20.53
	5720	144	а	6	19.83
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	20.57
	5600	120	n (20MHz)	6.5/7.2 (MCS0)	20.23
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	20.14
	5500	100	ax (20MHz)	6.5/7.2 (MCS0)	21.52
	5600	120	ax (20MHz)	6.5/7.2 (MCS0)	21.95
	5720	144	ax (20MHz)	6.5/7.2 (MCS0)	20.71
	5510	102	n (40MHz)	13.5/15 (MCS0)	39.15
ပ္ပ	5590	118	n (40MHz)	13.5/15 (MCS0)	39.50
Band 2C	5710	142	n (40MHz)	13.5/15 (MCS0)	39.79
Bar	5510	102	ax (40MHz)	13.5/15 (MCS0)	40.28
	5590	118	ax (40MHz)	13.5/15 (MCS0)	40.14
	5710	142	ax (40MHz)	13.5/15 (MCS0)	39.89
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	81.63
	5610	122	ac (80MHz)	29.3/32.5 (MCS0)	81.45
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	81.79
	5530	106	ax (80MHz)	29.3/32.5 (MCS0)	81.40
	5610	122	ax (80MHz)	29.3/32.5 (MCS0)	80.87
	5690	138	ax (80MHz)	29.3/32.5 (MCS0)	82.05
	5570	100	ac (160MHz)	58.5/65 (MCS0)	163.40
	5570	114	ax (160MHz)	58.5/65 (MCS0)	161.70
1. 7.			andwidth	Moasuromor	

Table 7-2. Conducted Bandwidth Measurements MIMO ANT1


FCC ID: A3LSMS911U		MEASUREMENT REPORT (CERTIFICATION)		
Test Report S/N:	Test Dates:	EUT Type:	Page 15 of 254	
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Fage 15 01 254	

V9.0 02/01/2019



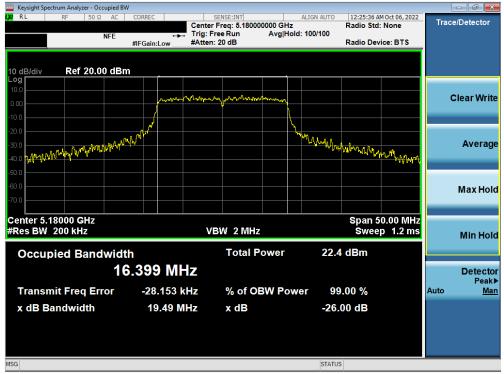


Plot 7-1. 26dB Bandwidth Plot ANT1 (802.11a (UNII Band 1) - Ch. 36)

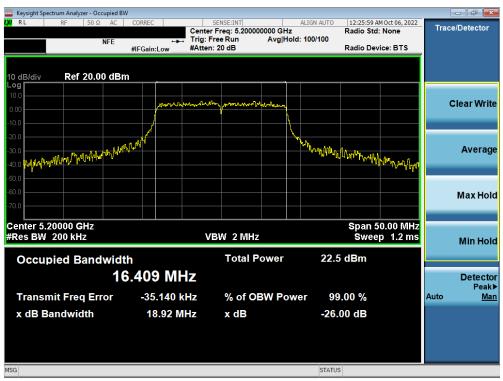


Plot 7-2. 26dB Bandwidth Plot ANT1 (802.11a (UNII Band 1) - Ch. 40)

FCC ID: A3LSMS911U		Approved by: Technical Manager	
Test Report S/N: 1M2209010096-13-R1.A3L	Test Dates: 09/02 - 11/08/2022	EUT Type: Portable Handset	Page 16 of 254
		·	V9 0 02/01/2019



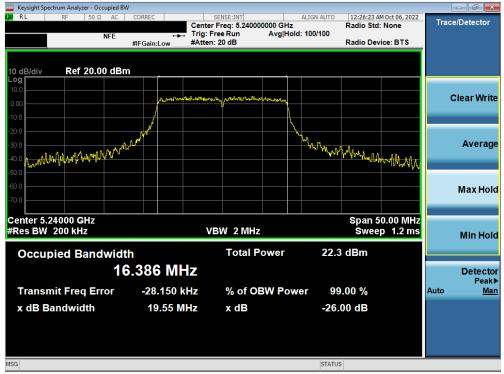

Plot 7-3. 26dB Bandwidth Plot ANT1 (802.11a (UNII Band 1) - Ch. 48)

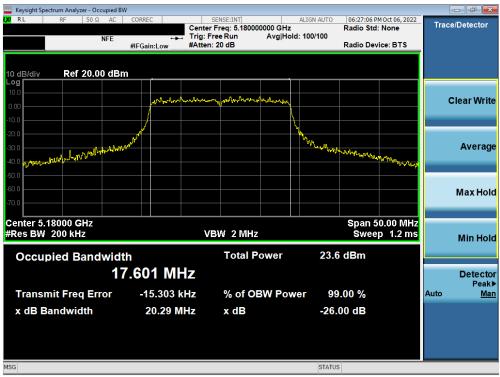

Plot 7-4. 26dB Bandwidth Plot ANT1 (20MHz BW 802.11n (UNII Band 1) - Ch. 36)

FCC ID: A3LSMS911U		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dego 17 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 17 of 254
			V9 0 02/01/2019





Plot 7-5. 26dB Bandwidth Plot ANT1 (20MHz BW 802.11n (UNII Band 1) - Ch. 40)




Plot 7-6. 26dB Bandwidth Plot ANT1 (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: A3LSMS911U		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 19 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 18 of 254
	•	-	V9 0 02/01/2019






Plot 7-7. 26dB Bandwidth Plot ANT1 (20MHz BW 802.11ax (UNII Band 1) - Ch. 36)

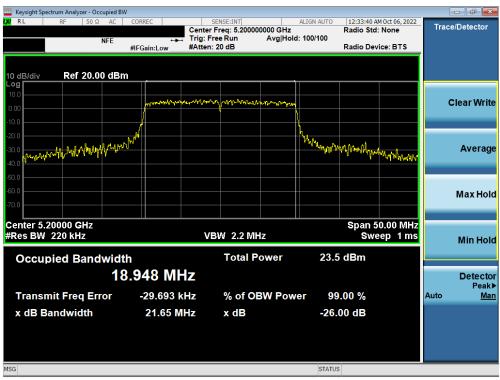


Plot 7-8. 26dB Bandwidth Plot ANT1 (20MHz BW 802.11ax (UNII Band 1) - Ch. 40)

FCC ID: A3LSMS911U		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dego 10 of 254	
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 19 of 254	
			V9.0 02/01/2019	



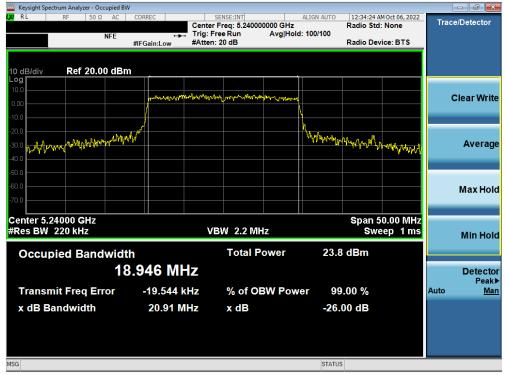


Plot 7-9. 26dB Bandwidth Plot ANT1 (20MHz BW 802.11ax (UNII Band 1) - Ch. 48)

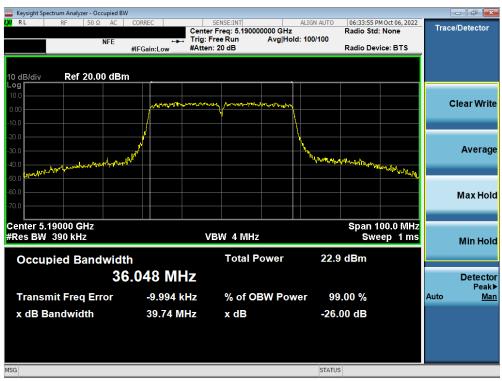


Plot 7-10. 26dB Bandwidth Plot ANT1 (40MHz BW 802.11n (UNII Band 1) - Ch. 38)

FCC ID: A3LSMS911U		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dega 20 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 20 of 254
			V9.0 02/01/2019



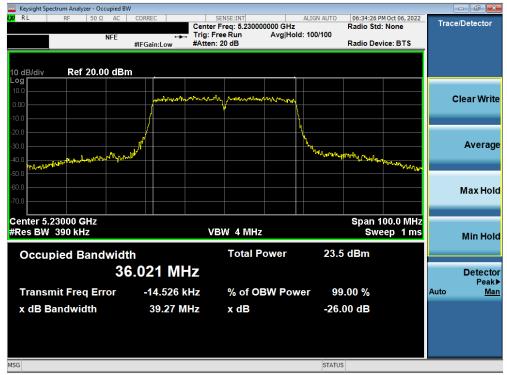

Plot 7-11. 26dB Bandwidth Plot ANT1 (40MHz BW 802.11n (UNII Band 1) - Ch. 46)

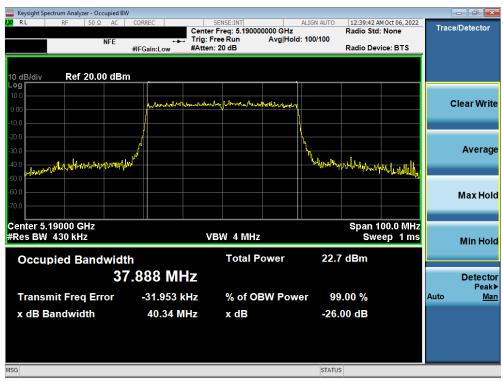


Plot 7-12. 26dB Bandwidth Plot ANT1 (40MHz BW 802.11ax (UNII Band 1) - Ch. 38)

FCC ID: A3LSMS911U		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dego 01 of 054	
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 21 of 254	
			V9.0 02/01/2019	



Keysight Spectrum Analyzer - O	ccupied BW									
LX RL RF 50 Ω	2 AC CO	IRREC		NSE:INT		ALIGN AUTO		M Oct 06, 2022	Trac	e/Detector
				req: 5.23000		d: 100/100	Radio Std	None	mac	e/Detector
	NFE #IE	Gain:Low	#Atten: 2		Avginoi	a: 100/100	Radio Dev	ice: BTS		
,	#16	Gam.Low	#/ teterit. 2	U U D			Tualo Bet	100. 010		
10 dB/div Ref 20.0)0 dBm									
Log										
10.0										
0.00		America	Mar Mar and Mar Mar	manhalast	www.Witew.tew					Clear Write
-10.0)				
		1				N.				
-20.0						.				
-30.0	- /					⊣ ų				Average
-40.0	here and the					Marchen	to be able			
CUMP MANAGE	and the first of the					- 104 Q4 Q	en et 10akter 0 ^{kk}	math hard hard		
-50.0										
-60.0										Max Hold
-70.0										maxiloia
Center 5.23000 GHz							Span 1	00.0 MHz		
#Res BW 390 kHz			VB	N 4 MHz				ep 1 ms		Min Hald
										Min Hold
Occupied Band	width			Total P	ower	23.3	dBm			
Occupied Baile			-							
	37.7	′75 M⊦	Z							Detector
										Peak▶
Transmit Freq Er	ror	-50.924 k	Hz	% of O	3W Pow	/er 99	.00 %		Auto	<u>Man</u>
x dB Bandwidth		40.19 M		x dB		26	00 dB			
X dB Bandwidth		40.19 M	ΠZ	хав		-20.	UU aB			
MSG						STATUS				


Plot 7-13. 26dB Bandwidth Plot ANT1 (40MHz BW 802.11ax (UNII Band 1) - Ch. 46)

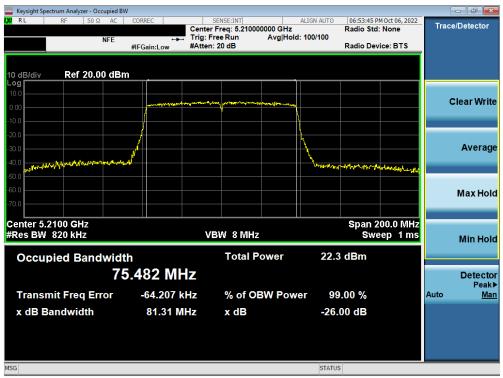


Plot 7-14. 26dB Bandwidth Plot ANT1 (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

FCC ID: A3LSMS911U		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 22 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 22 of 254
	•	÷	V9 0 02/01/2019



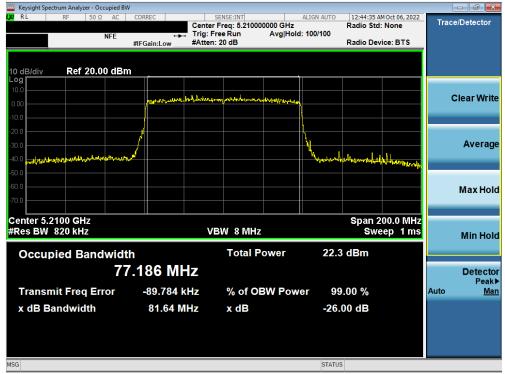

Plot 7-15. 26dB Bandwidth Plot ANT1 (80MHz BW 802.11ax (UNII Band 1) - Ch. 42)

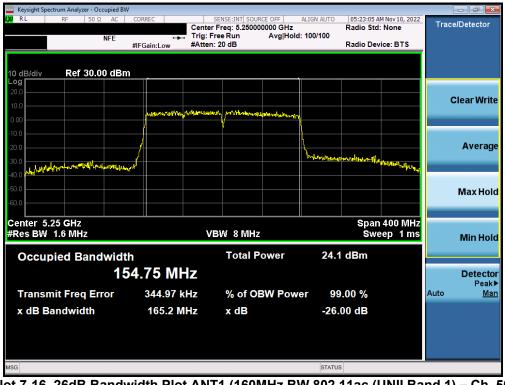

Plot 7-16. 26dB Bandwidth Plot ANT1 (160MHz BW 802.11ac (UNII Band 1) - Ch. 50)

FCC ID: A3LSMS911U		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 22 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 23 of 254
		-	V9.0 02/01/2019



Keysight Spectrum Analyzer - Occupied B					
KL RF 50Ω AC		SENSE:INT er Freq: 5.250000000 GH	z Radio Sto	PM Oct 10, 2022 d: None	Trace/Detector
		Free Run Avg H en: 30 dB	old: 100/100 Radio De	vice: BTS	
10 dB/div Ref 20.00 dBr	n				
10.0					
0.00	م مربعا المربع من مربع ما مربع	dmat size as			Clear Write
-10.0			hand a		
-20.0					Average
-30.0	open		hatter white the stand of the stand	have	Average
-40.0 at 10				and the second states of the s	
-60.0					Max Hold
-70.0					
Center 5.2500 GHz			Span 4	400.0 MHz	
#Res BW 200 kHz	<u> </u>	VBW 2 MHz		9.267 ms	Min Hold
Occupied Bandwidt	h	Total Power	22.5 dBm		
	56.30 MHz				Detector
					Peak▶
Transmit Freq Error	-231.05 kHz	% of OBW Po			Auto <u>Man</u>
x dB Bandwidth	161.2 MHz	x dB	-26.00 dB		
MSG			STATUS		


Plot 7-17. 26dB Bandwidth Plot ANT1 (160MHz BW 802.11ax (UNII Band 1) - Ch. 50)




Plot 7-18. 26dB Bandwidth Plot ANT1 (802.11a (UNII Band 2A) - Ch. 52)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 24 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 24 of 254
			V9 0 02/01/2019



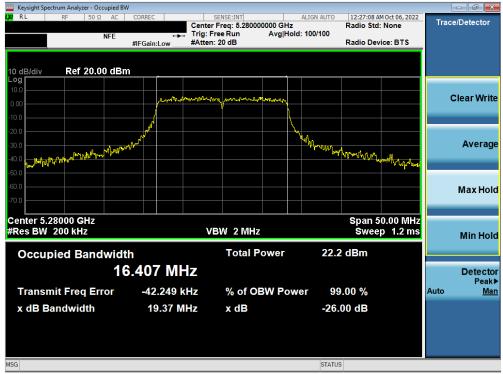


Plot 7-19. 26dB Bandwidth Plot ANT1 (802.11a (UNII Band 2A) - Ch. 56)

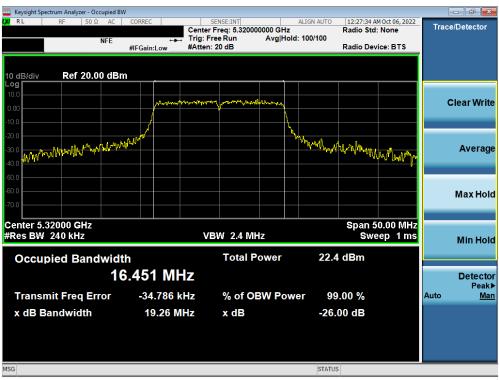


Plot 7-20. 26dB Bandwidth Plot ANT1 (802.11a (UNII Band 2A) - Ch. 64)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2209010096-13-R1.A3L	Test Dates: 09/02 - 11/08/2022	EUT Type: Portable Handset	Page 25 of 254
			V9.0.02/01/201



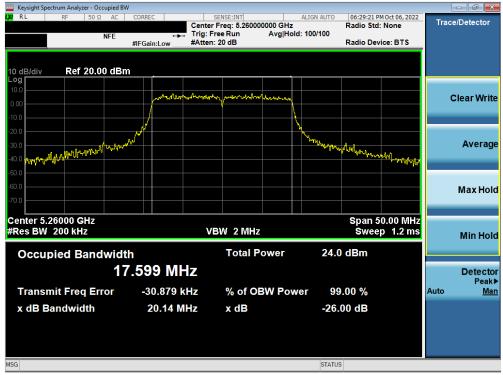


Plot 7-21. 26dB Bandwidth Plot ANT1 (20MHz BW 802.11n (UNII Band 2A) - Ch. 52)

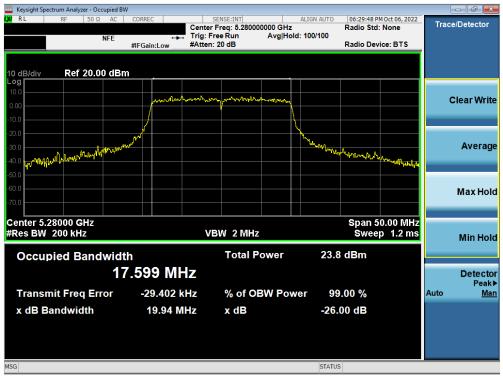

Plot 7-22. 26dB Bandwidth Plot ANT1 (20MHz BW 802.11n (UNII Band 2A) - Ch. 56)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 26 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 26 of 254
	•	÷	V9 0 02/01/2019



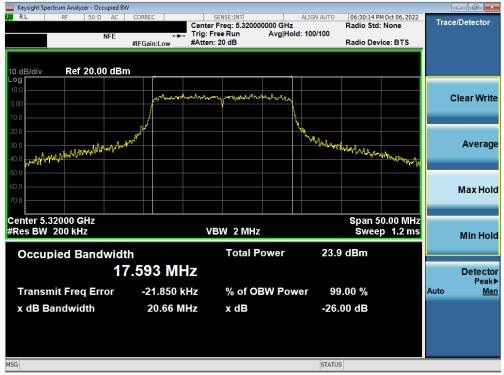

Plot 7-23. 26dB Bandwidth Plot ANT1 (20MHz BW 802.11n (UNII Band 2A) - Ch. 64)




Plot 7-24. 26dB Bandwidth Plot ANT1 (20MHz BW 802.11ax (UNII Band 2A) – Ch. 52)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 07 of 054
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 27 of 254
			V9.0 02/01/2019






Plot 7-25. 26dB Bandwidth Plot ANT1 (20MHz BW 802.11ax (UNII Band 2A) - Ch. 56)

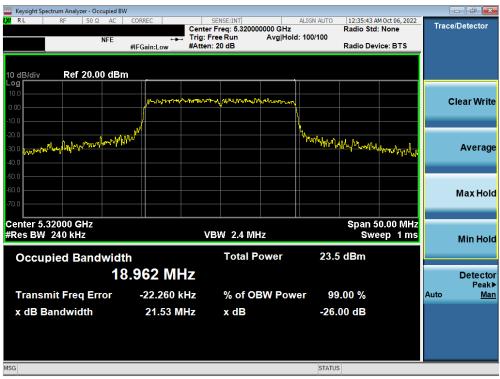

Plot 7-26. 26dB Bandwidth Plot ANT1 (20MHz BW 802.11ax (UNII Band 2A) - Ch. 64)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dego 29 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 28 of 254
		·	V9.0 02/01/2019



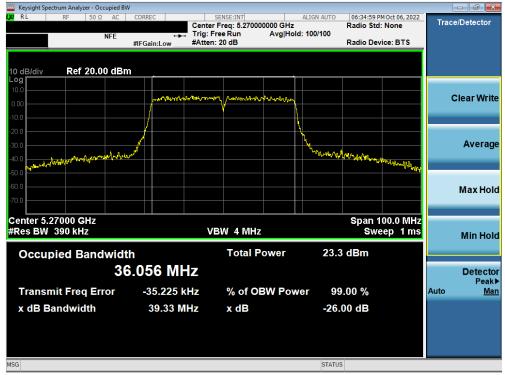


Plot 7-27. 26dB Bandwidth Plot ANT1 (40MHz BW 802.11n (UNII Band 2A) - Ch. 54)




Plot 7-28. 26dB Bandwidth Plot ANT1 (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 20 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 29 of 254
	•	-	V9.0.02/01/2019



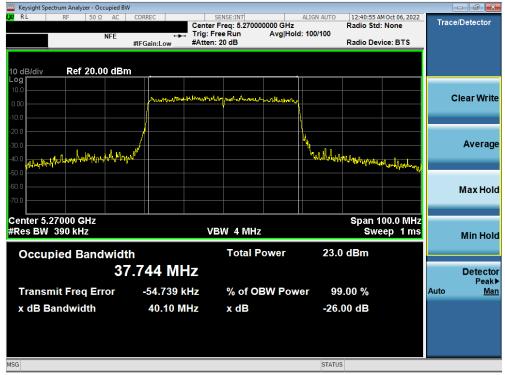

Plot 7-29. 26dB Bandwidth Plot ANT1 (40MHz BW 802.11ax (UNII Band 2A) - Ch. 54)

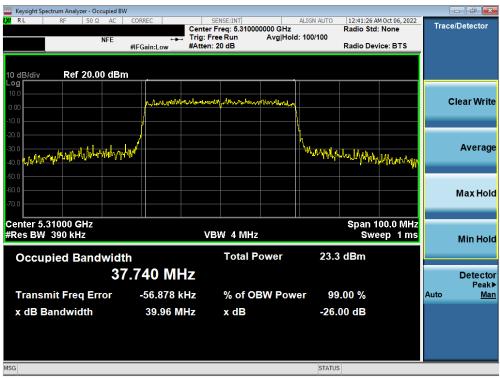


Plot 7-30. 26dB Bandwidth Plot ANT1 (40MHz BW 802.11ax (UNII Band 2A) - Ch. 62)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 20 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 30 of 254
			V9.0 02/01/2019



E Keysight Spectrum Analyzer - Occupied BW					
LX/RL RF 50Ω AC	CORREC Cente	SENSE:INT r Freg: 5.290000000 GHz	ALIGN AUTO	06:54:34 PM Oct 06, 2022 Radio Std: None	Trace/Detector
NFE		Free Run Avg Hol n: 20 dB	ld: 100/100	Radio Device: BTS	
	#IFGain:Low #Atter	1. 20 UD	F	adio Device. D13	
40 JDJC Dof 20.00 dDw					
10 dB/div Ref 20.00 dBm					
10.0					Clear Write
0.00	and a straight of the state of	and have from the first of the second s	•		Clear Write
-10.0			1		
-20.0	- pa		\		
-30.0	1		<u> </u>		Average
-40.0 www.halpergrand plan wather marking	<u>1</u>		Und mon w	with the relation of the states	
-50.0					
-60.0					Max Hold
-70.0					
Center 5.2900 GHz				Span 200.0 MHz	
#Res BW 820 kHz	V	BW 8 MHz		Sweep 1 ms	Min Hold
Occupied Bondwidt	h	Total Power	22.6 c	IRm	
Occupied Bandwidt			22.00		
/5	5.556 MHz				Detector Peak
Transmit Freq Error	-130.61 kHz	% of OBW Pov	ver 99.0	0 %	Auto <u>Mar</u>
x dB Bandwidth	81.69 MHz	x dB	-26.00) dB	
x dB Banawidun	01:00 11112		20.00		
MSG			STATUS		
ASG			STATUS		

Plot 7-31. 26dB Bandwidth Plot ANT1 (80MHz BW 802.11ac (UNII Band 2A) - Ch. 58)

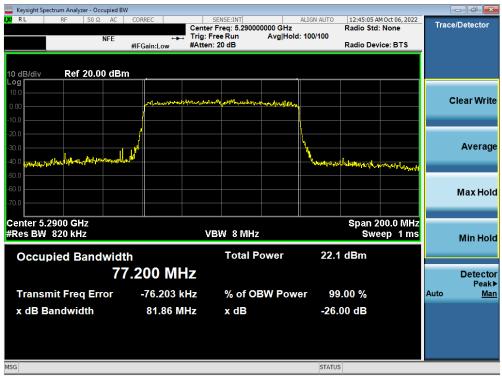

Plot 7-32. 26dB Bandwidth Plot ANT1 (80MHz BW 802.11ax (UNII Band 2A) - Ch. 58)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 21 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 31 of 254
		-	V9.0.02/01/2019






Plot 7-33. 26dB Bandwidth Plot ANT1 (802.11a (UNII Band 2C) - Ch. 100)




Plot 7-34. 26dB Bandwidth Plot ANT1 (802.11a (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dego 22 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 32 of 254
			V9.0.02/01/2019



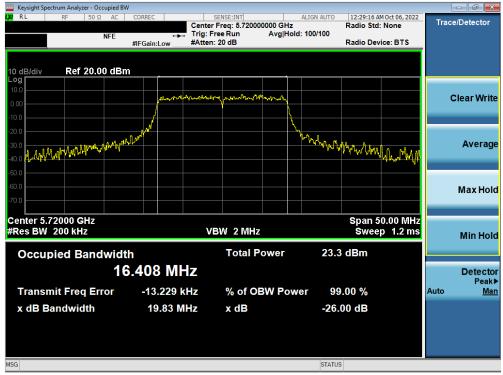

Plot 7-35. 26dB Bandwidth Plot ANT1 (802.11a (UNII Band 2C) - Ch. 144)

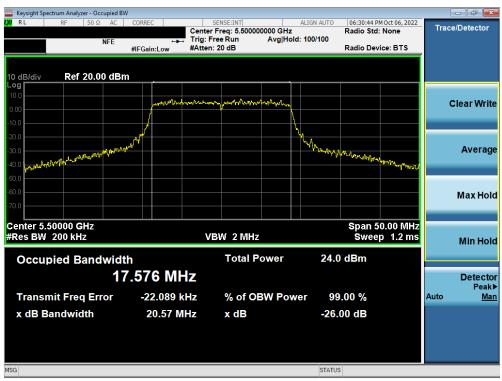


Plot 7-36. 26dB Bandwidth Plot ANT1 (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 22 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 33 of 254
		-	V9.0.02/01/2019






Plot 7-37. 26dB Bandwidth Plot ANT1 (20MHz BW 802.11n (UNII Band 2C) - Ch. 120)

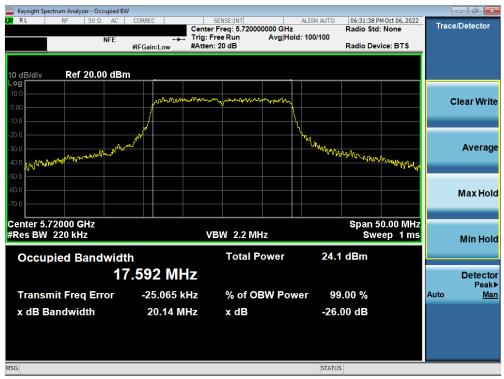


Plot 7-38. 26dB Bandwidth Plot ANT1 (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dega 24 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 34 of 254
		·	V9.0 02/01/2019



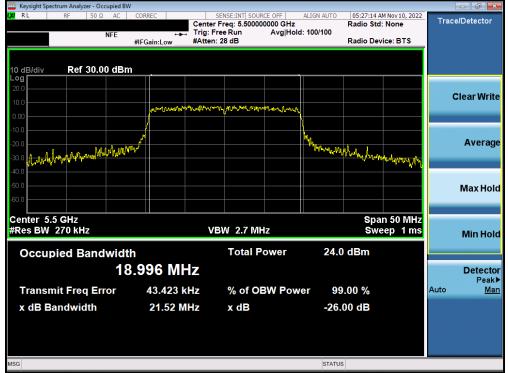


Plot 7-39. 26dB Bandwidth Plot ANT1 (20MHz BW 802.11ax (UNII Band 2C) - Ch. 100)

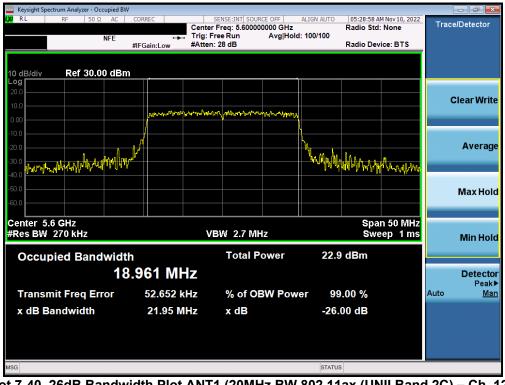


Plot 7-40. 26dB Bandwidth Plot ANT1 (20MHz BW 802.11ax (UNII Band 2C) - Ch. 120)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 25 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 35 of 254
	•	•	V9.0 02/01/2019



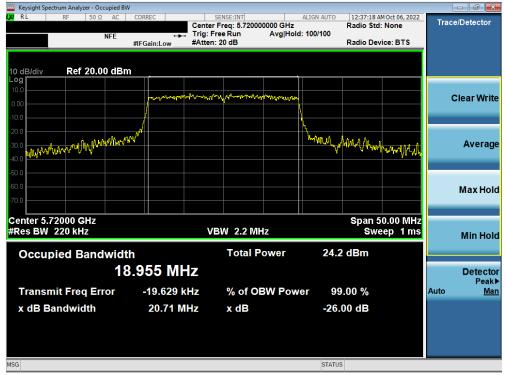


Plot 7-41. 26dB Bandwidth Plot ANT1 (20MHz BW 802.11ax (UNII Band 2C) - Ch. 144)

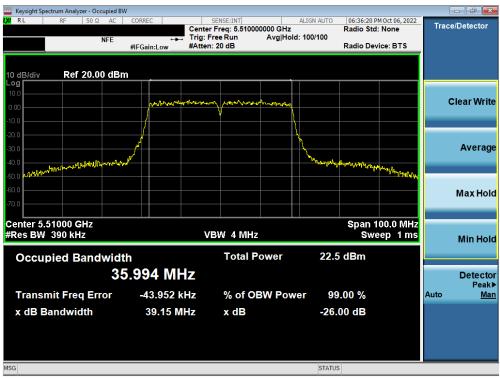


Plot 7-42. 26dB Bandwidth Plot ANT1 (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dega 26 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 36 of 254
			V9.0 02/01/2019



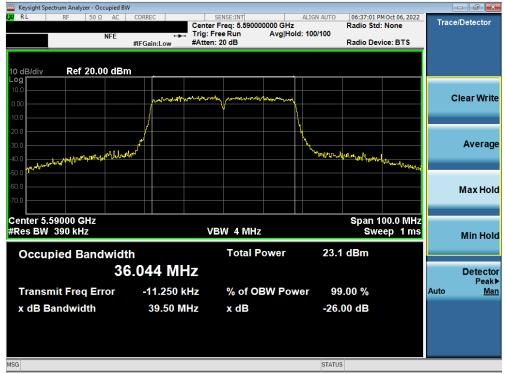


Plot 7-43. 26dB Bandwidth Plot ANT1 (40MHz BW 802.11n (UNII Band 2C) - Ch. 118)

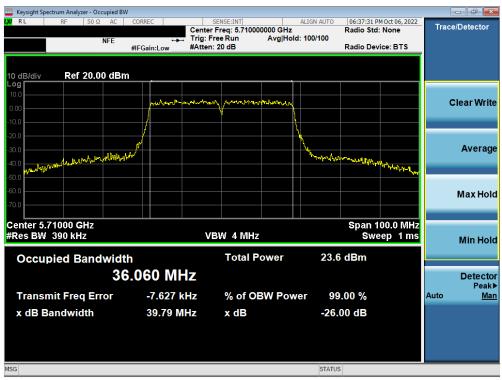


Plot 7-44. 26dB Bandwidth Plot ANT1 (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dego 27 of 254	
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 37 of 254	
		·	V9.0 02/01/2019	



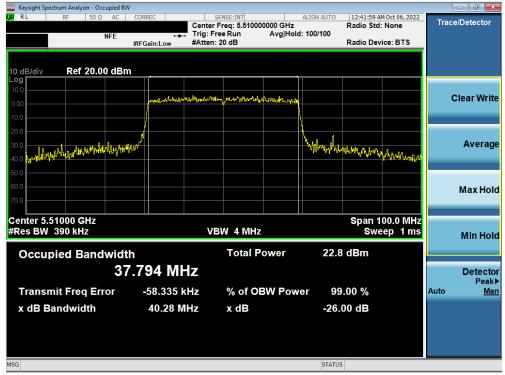


Plot 7-45. 26dB Bandwidth Plot ANT1 (40MHz BW 802.11ax (UNII Band 2C) - Ch. 102)

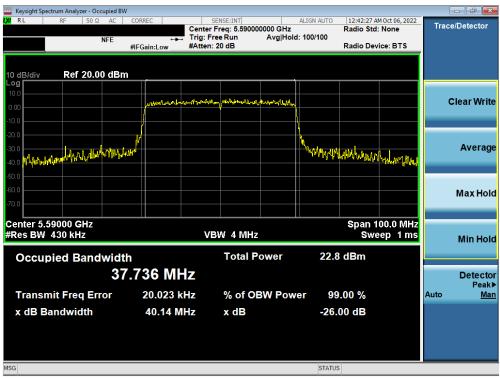


Plot 7-46. 26dB Bandwidth Plot ANT1 (40MHz BW 802.11ax (UNII Band 2C) – Ch. 118)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 20 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 38 of 254
		÷	V9.0.02/01/2019



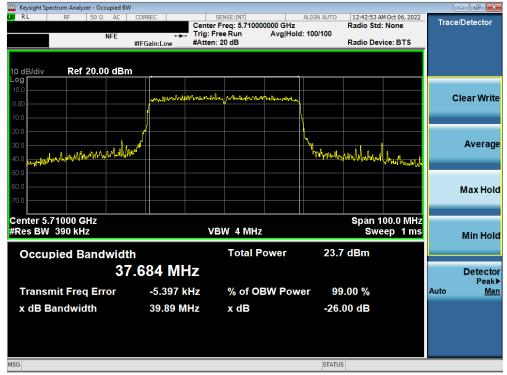

Plot 7-47. 26dB Bandwidth Plot ANT1 (40MHz BW 802.11ax (UNII Band 2C) - Ch. 142)

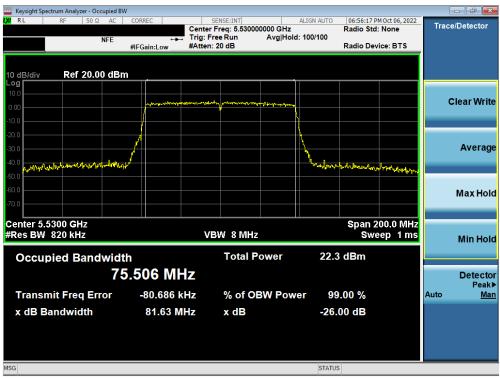

Plot 7-48. 26dB Bandwidth Plot ANT1 (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dage 20 of 254	
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 39 of 254	
	•	÷	V9.0.02/01/2019	






Plot 7-49. 26dB Bandwidth Plot ANT1 (80MHz BW 802.11ac (UNII Band 2C) - Ch. 122)




Plot 7-50. 26dB Bandwidth Plot ANT1 (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dage 40 of 254	
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 40 of 254	
	•	-	V9.0.02/01/2019	



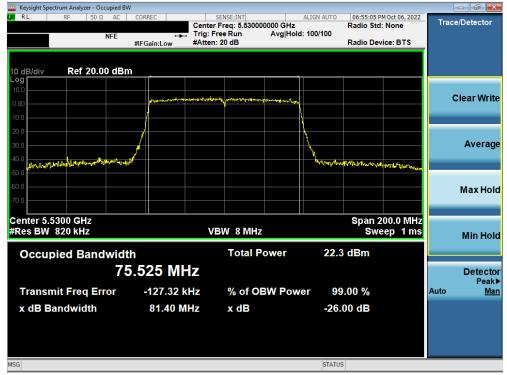

Plot 7-51. 26dB Bandwidth Plot ANT1 (80MHz BW 802.11ax (UNII Band 2C) - Ch. 106)

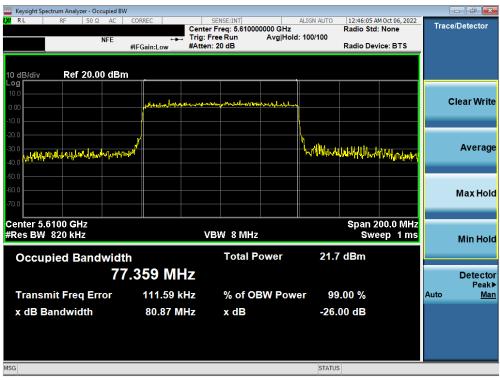

Plot 7-52. 26dB Bandwidth Plot ANT1 (80MHz BW 802.11ax (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dego 41 of 254	
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 41 of 254	
		÷	V9.0.02/01/2019	



V				
CORREC	SENSE:INT			Trace/Detector
			a: None	
			vice: BTS	
and a start of a large of a start of a start of a	hidystantionsmentameterusty	n,		Clear Write
JM		Willinghamman and the second	Alexand I am 1	Average
		and the second se	A MARKAN WAR	
				Max Hold
		0		
W				
v		5₩	eep Tills	Min Hold
h	Total Power	22.7 dBm		
7.210 MHz				Detector
				Peak▶
36.904 kHz	% of OBW Pow	ver 99.00 %		Auto <u>Man</u>
82.05 MHz	x dB	-26.00 dB		
		STATUS		
	And the second s	Correc SENSE:INT Center Freq: 6.69000000 GHz #IFGain:Low #Atten: 20 dB n VBW 8 MHz th Total Power 7.210 MHz 36.904 kHz % of OBW Pow	CORREC SENSE:INT ALIGN AUTO 12:46:33. Center Freq: 6.69000000 GHz Radio Str Trig: Free Run Avg Hold: 100/100 Radio De Trig: Free Run Avg Hold: 100/100 Radio De N Matten: 20 dB Str Total Power 22.7 dBm 7.210 MHz 36.904 kHz % of OBW Power 99.00 % 82.05 MHz x dB -26.00 dB	CORREC SENSE:INT ALIGN AUTO 12:46:33 AM Oct 06, 2022 Radio Std: None Radio Device: BTS AuglHold: 100/100 #Atten: 20 dB n N Span 200.0 MHz Span 200.0 MHz Span 200.0 MHz Sth Total Power 22.7 dBm 7.210 MHz 36.904 kHz % of OBW Power 99.00 % 82.05 MHz x dB -26.00 dB

Plot 7-53. 26dB Bandwidth Plot ANT1 (80MHz BW 802.11ax (UNII Band 2C) - Ch. 138)



Plot 7-54. 26dB Bandwidth Plot ANT1 (160MHz BW 802.11ac (UNII Band 2C) - Ch. 114)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dage 42 of 254	
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 42 of 254	
			V9 0 02/01/2019	



Keysight Spectrum Analyzer - Occupied B					
X RL RF 50Ω AC	🛶 Trig	SENSE:INT ter Freq: 5.570000000 GH Free Run Avg F ten: 30 dB	Iz Radio Iold: 100/100	3:19 PM Oct 10, 2022 5 Std: None 5 Device: BTS	Trace/Detector
	#IFGain:Low #Att	en: 30 dB	Radio	Device: BTS	
10 dB/div Ref 20.00 dB	n				
10.0					Clear Write
-10.0	Married Construction	Royanter material and the second			Clear Wind
-20.0					
-30,0			Jun and and and and and a start	letes like and a	Average
-40.0			Additional top of the	and a second state of the second s	
-60.0					Max Hold
-70.0					
Center 5.5700 GHz #Res BW 200 kHz			Spa	an 400.0 MHz	
#Res BW 200 KHZ		VBW 2 MHz	Swe	ep 9.267 ms	Min Hold
Occupied Bandwid	th	Total Power	22.1 dBn	n	
1	56.61 MHz				Detecto
Transmit Freq Error	55.214 kHz	% of OBW Po	ower 99.00 %	6	Auto <u>Mar</u>
x dB Bandwidth	161.7 MHz	x dB	-26.00 dl	3	
MSG			STATUS		

Plot 7-55. 26dB Bandwidth Plot ANT1 (160MHz BW 802.11ax (UNII Band 2C) - Ch. 114)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 42 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 43 of 254
			V0.0.02/01/2010



MIMO Antenna-2 26dB Bandwidth Measurements


	Frequency	Channel			Measured 26dB
	[MHz]	No.	802.11 Mode	Data Rate [Mbps]	Bandwidth [MHz]
	5180	36	а	6	19.07
	5200	40	а	6	18.87
	5240	48	а	6	18.59
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	19.70
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	19.72
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	19.81
.	5180	36	ax (20MHz)	6.5/7.2 (MCS0)	20.72
Band	5200	40	ax (20MHz)	6.5/7.2 (MCS0)	20.74
ä	5240	48	ax (20MHz)	6.5/7.2 (MCS0)	20.43
	5190	38	n (40MHz)	13.5/15 (MCS0)	39.46
	5230	46	n (40MHz)	13.5/15 (MCS0)	39.38
	5190	38	ax (40MHz)	13.5/15 (MCS0)	40.06
	5230	46	ax (40MHz)	13.5/15 (MCS0)	39.93
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	80.97
	5210	42	ax (80MHz)	29.3/32.5 (MCS0)	81.50
2A	5250	50	ac (160MHz)	58.5/65 (MCS0)	163.60
Band 1/2A	5250	50	ax (160MHz)	58.5/65 (MCS0)	160.90
	5260	52	а	6	18.82
	5280	56	а	6	19.05
	5320	64	а	6	18.85
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	19.74
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	20.00
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	19.76
2A	5260	52	ax (20MHz)	6.5/7.2 (MCS0)	21.02
Band 2A	5280	56	ax (20MHz)	6.5/7.2 (MCS0)	20.62
Ba	5320	64	ax (20MHz)	6.5/7.2 (MCS0)	20.85
	5270	54	n (40MHz)	13.5/15 (MCS0)	39.16
	5310	62	n (40MHz)	13.5/15 (MCS0)	39.30
	5270	54	ax (40MHz)	13.5/15 (MCS0)	39.66
	5310	62	ax (40MHz)	13.5/15 (MCS0)	39.96
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	81.35
	5290	58	ax (80MHz)	29.3/32.5 (MCS0)	81.72
	5500	100	а	6	19.06
	5600	120	а	6	18.77
	5720	144	а	6	19.07
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	19.85
	5600	120	n (20MHz)	6.5/7.2 (MCS0)	19.64
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	19.69
	5500	100	ax (20MHz)	6.5/7.2 (MCS0)	20.75
	5600	120	ax (20MHz)	6.5/7.2 (MCS0)	20.60
	5720	144	ax (20MHz)	6.5/7.2 (MCS0)	20.93
	5510	102	n (40MHz)	13.5/15 (MCS0)	39.50
Band 2C	5590	118	n (40MHz)	13.5/15 (MCS0)	39.49
and	5710	142	n (40MHz)	13.5/15 (MCS0)	39.54
Ш	5510	102	ax (40MHz)	13.5/15 (MCS0)	40.20
	5590	118	ax (40MHz)	13.5/15 (MCS0)	40.14
	5710	142	ax (40MHz)	13.5/15 (MCS0)	40.05
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	81.55
	5610	122	ac (80MHz)	29.3/32.5 (MCS0)	80.96
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	81.28
	5530	106	ax (80MHz)	29.3/32.5 (MCS0)	81.29
	5610	122	ax (80MHz)	29.3/32.5 (MCS0)	81.12
	5690	138	ax (80MHz)	29.3/32.5 (MCS0)	81.28
	5570	114	ac (160MHz)	58.5/65 (MCS0)	165.10
	5570	114 Juctod B	ax (160MHz) Bandwidth	58.5/65 (MCS0)	160.90

Table 7-3. Conducted Bandwidth Measurements MIMO ANT2


FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dogo 44 of 254	
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 44 of 254	

V9.0 02/01/2019



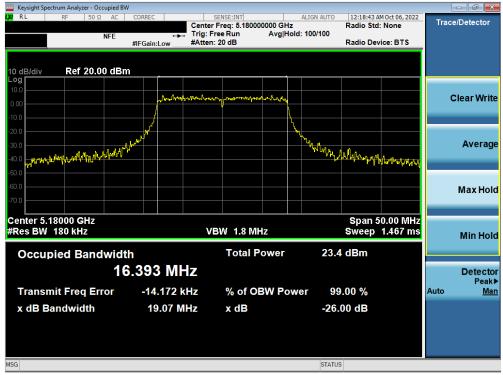


Plot 7-56. 26dB Bandwidth Plot ANT2 (802.11a (UNII Band 1) - Ch. 36)

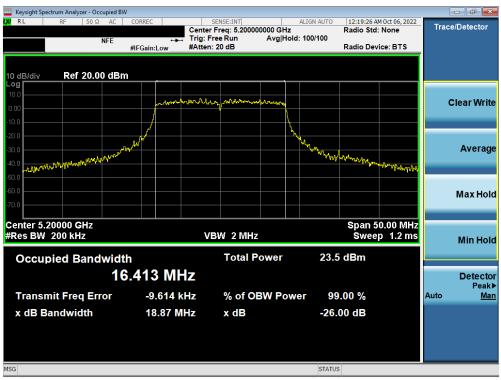

Plot 7-57. 26dB Bandwidth Plot ANT2 (802.11a (UNII Band 1) - Ch. 40)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2209010096-13-R1.A3L	Test Dates: 09/02 - 11/08/2022	EUT Type: Portable Handset	Page 45 of 254
			V9.0.02/01/2019



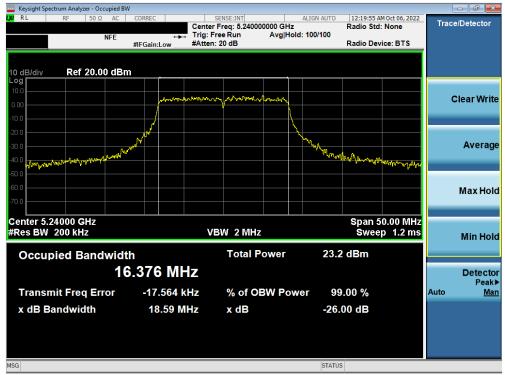


Plot 7-58. 26dB Bandwidth Plot ANT2 (802.11a (UNII Band 1) - Ch. 48)




Plot 7-59. 26dB Bandwidth Plot ANT2 (20MHz BW 802.11n (UNII Band 1) - Ch. 36)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2209010096-13-R1.A3L	Test Dates: 09/02 - 11/08/2022	EUT Type: Portable Handset	Page 46 of 254
		T on abio Handoor	V9.0.02/01/2019



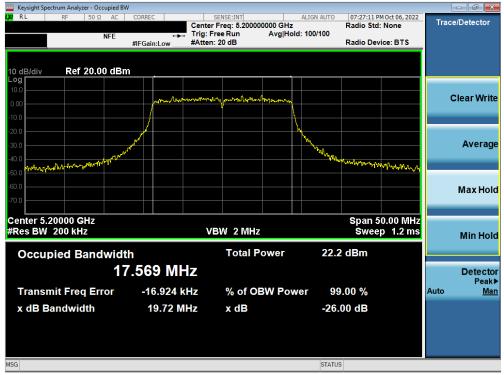


Plot 7-60. 26dB Bandwidth Plot ANT2 (20MHz BW 802.11n (UNII Band 1) - Ch. 40)

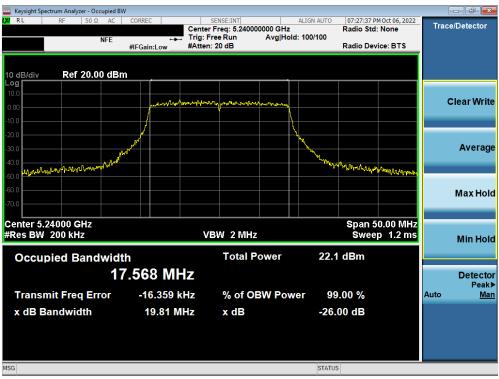


Plot 7-61. 26dB Bandwidth Plot ANT2 (20MHz BW 802.11n (UNII Band 1) - Ch. 48)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 47 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 47 of 254
	•	÷	V9 0 02/01/2019



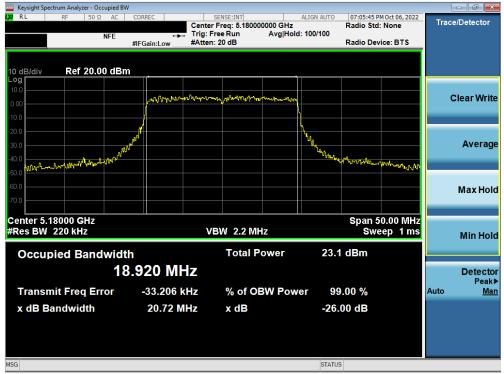


Plot 7-62. 26dB Bandwidth Plot ANT2 (20MHz BW 802.11ax (UNII Band 1) - Ch. 36)

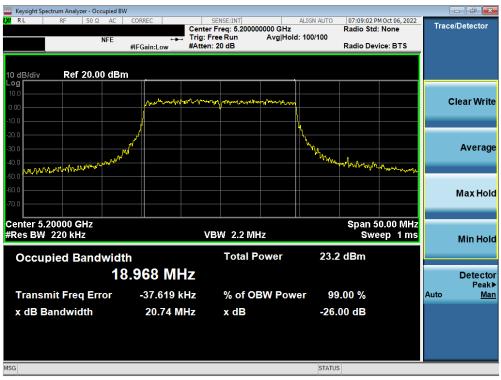


Plot 7-63. 26dB Bandwidth Plot ANT2 (20MHz BW 802.11ax (UNII Band 1) – Ch. 40)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Deg. 49 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 48 of 254
			V9 0 02/01/2019



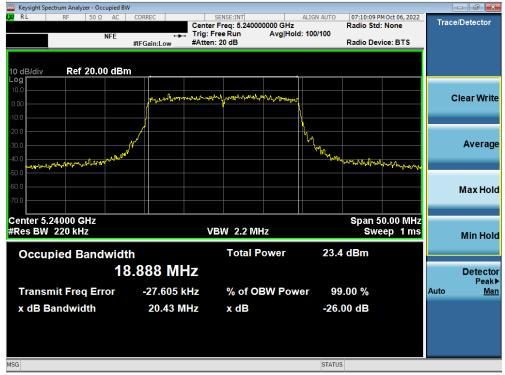


Plot 7-64. 26dB Bandwidth Plot ANT2 (20MHz BW 802.11ax (UNII Band 1) - Ch. 48)

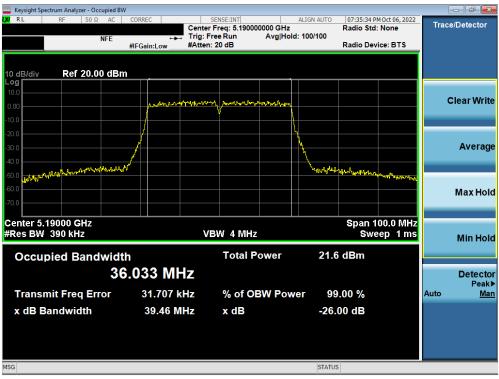

Plot 7-65. 26dB Bandwidth Plot ANT2 (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dege 40 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 49 of 254
		-	V9.0 02/01/2019



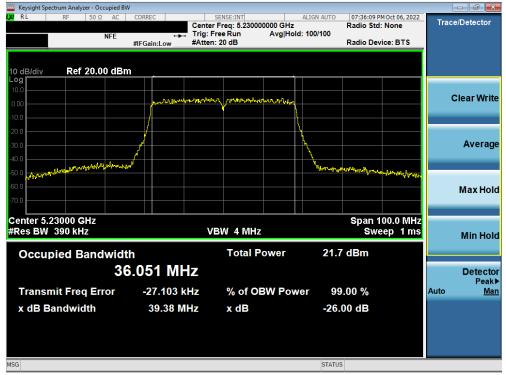


Plot 7-66. 26dB Bandwidth Plot ANT2 (40MHz BW 802.11n (UNII Band 1) - Ch. 46)




Plot 7-67. 26dB Bandwidth Plot ANT2 (40MHz BW 802.11ax (UNII Band 1) – Ch. 38)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dege E0 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 50 of 254
		-	V9.0 02/01/2019



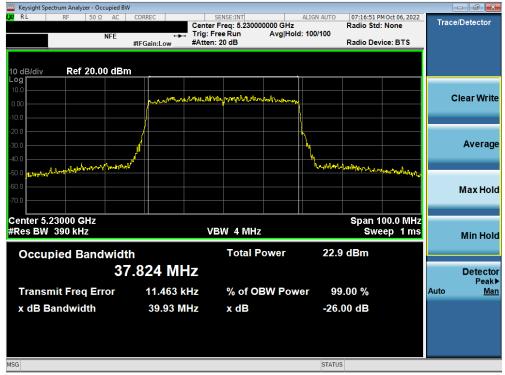


Plot 7-68. 26dB Bandwidth Plot ANT2 (40MHz BW 802.11ax (UNII Band 1) - Ch. 46)

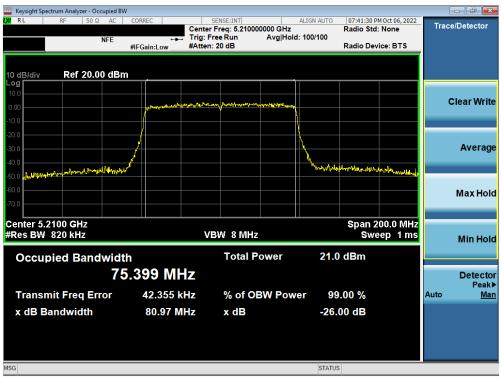


Plot 7-69. 26dB Bandwidth Plot ANT2 (80MHz BW 802.11ac (UNII Band 1) - Ch. 42)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dege E1 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 51 of 254
		-	V9.0 02/01/2019



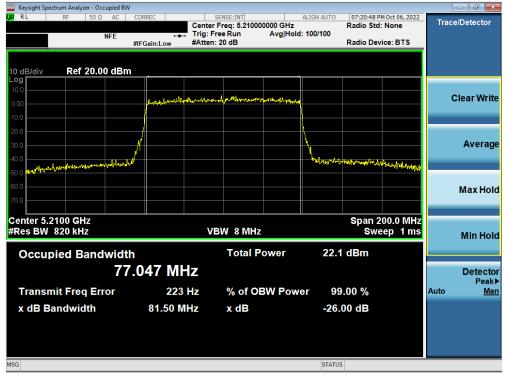

Plot 7-70. 26dB Bandwidth Plot ANT2 (80MHz BW 802.11ax (UNII Band 1) - Ch. 42)

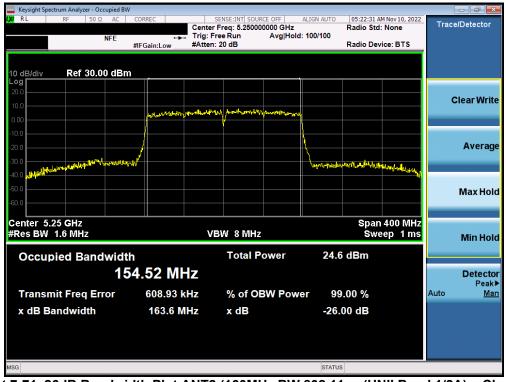

Plot 7-71. 26dB Bandwidth Plot ANT2 (160MHz BW 802.11ac (UNII Band 1/2A) - Ch. 50)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Daga 52 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 52 of 254
			V9.0 02/01/2019



Keysight Spectrum Analyzer - Occupied BV						-0	
CIRL RF 50Ω AC	CORREC	SENSE:INT er Freg: 5.250000000 (ALIGN AUTO	04:08:05 PM Radio Std: 1		Trace/D	etector
		Free Run Avg n: 30 dB	Hold: 100/100				
	#IFGain:Low #Atte	n: 30 dB		Radio Devid	ce: BTS		
I0 dB/div Ref 20.00 dBr	n						
10.0							
0.00						Cle	ar Wri
10.0	per and a second second second	a have produced as the most of the same	demont.				
20.0							
30.0							Avera
40.0			A start behavely	-			
40.0			and the second sec		Non and the second		
60.0							
70.0						IV	lax Hol
70.0							_
Center 5.2500 GHz					0.0 MHz		
Res BW 200 kHz		VBW 2 MHz		Sweep 9	0.267 ms	ľ	/lin Ho
Occupied Bandwidt	h	Total Powe	r 23.7	/ dBm			
T	56.44 MHz						Detecto Peak
Transmit Freq Error	205.44 kHz	% of OBW F	ower 99	0.00 %		Auto	Ma
x dB Bandwidth	160.9 MHz	x dB	-26	00 dB			
	100.5 11112	A GE	20.				
			CTATI				
SG			STATU:				

Plot 7-72. 26dB Bandwidth Plot ANT2 (160MHz BW 802.11ax (UNII Band 1/2A) - Ch. 50)




Plot 7-73. 26dB Bandwidth Plot ANT2 (802.11a (UNII Band 2A) - Ch. 52)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Daga 52 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 53 of 254
	•	-	V9 0 02/01/2019






Plot 7-74. 26dB Bandwidth Plot ANT2 (802.11a (UNII Band 2A) - Ch. 56)

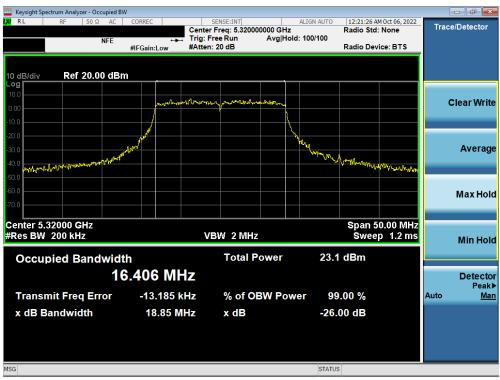


Plot 7-75. 26dB Bandwidth Plot ANT2 (802.11a (UNII Band 2A) - Ch. 64)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2209010096-13-R1.A3L	Test Dates: 09/02 - 11/08/2022	EUT Type: Portable Handset	Page 54 of 254
		-	V9.0.02/01/2019



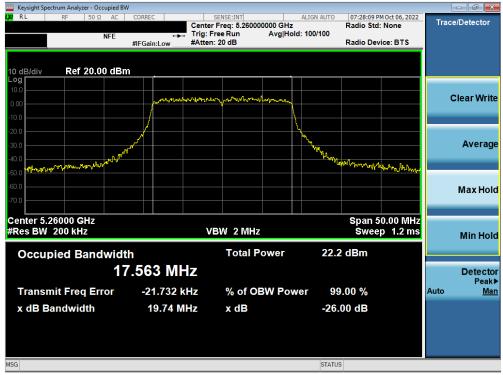


Plot 7-76. 26dB Bandwidth Plot ANT2 (20MHz BW 802.11n (UNII Band 2A) - Ch. 52)

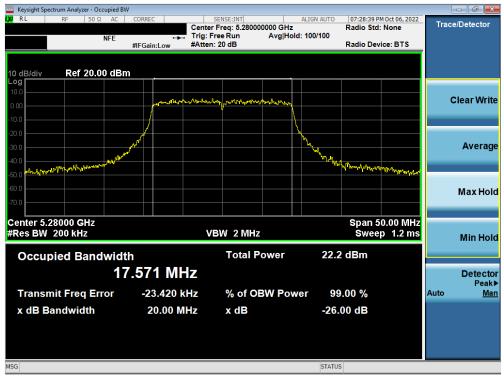

Plot 7-77. 26dB Bandwidth Plot ANT2 (20MHz BW 802.11n (UNII Band 2A) - Ch. 56)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dege EE of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 55 of 254
	•	÷	V9 0 02/01/2019



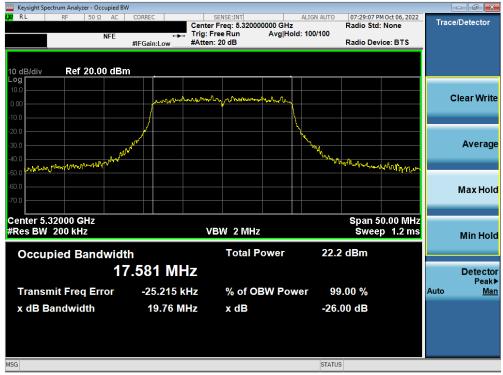

Plot 7-78. 26dB Bandwidth Plot ANT2 (20MHz BW 802.11n (UNII Band 2A) - Ch. 64)



Plot 7-79. 26dB Bandwidth Plot ANT2 (20MHz BW 802.11ax (UNII Band 2A) – Ch. 52)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage EG of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 56 of 254
	-	-	V9 0 02/01/2019





Plot 7-80. 26dB Bandwidth Plot ANT2 (20MHz BW 802.11ax (UNII Band 2A) - Ch. 56)



Plot 7-81. 26dB Bandwidth Plot ANT2 (20MHz BW 802.11ax (UNII Band 2A) – Ch. 64)

FCC ID: A3LSMS911U		Approved by: Technical Manager		
Test Report S/N:	Test Dates:	EUT Type:	Dege EZ of 254	
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 57 of 254	
		·	V9.0 02/01/2019	



Keysight Spectrum Analyzer - Occ									(
Χ RL RF 50 Ω	AC C	ORREC	Center Fr	ISE:INT eq: 5.27000		ALIGN AUTO	07:36:35 PI Radio Std:	None	Trac	e/Detector
	NFE #II	↔ FGain:Low	Trig: Free #Atten: 20		Avg Hol	d: 100/100	Radio Dev	ice: BTS		
	#1	Call.Low								
10 dB/div Ref 20.00	0 dBm									
Log										
10.0		a Adres from	for any and	heymon of the	all had man a				(Clear Write
0.00			V							
-10.0		1								
-20.0		£				1				Average
	Å					l,				Average
-40.0						markey	Marmon	which we are		
-60.0								· · · · · · · · · · · · · · · · · · ·		Maxilald
-70.0										Max Hold
Center 5.27000 GHz #Res BW 390 kHz			VBV	V 4 MHz				00.0 MHz ep 1 ms		
			101	• • •			OWC	ep i llis		Min Hold
Occupied Band	width			Total P	ower	21.8	dBm			
	36.0	068 MI	Hz							Detector
Transmit Freq Err	or.	1.085		% of O		or 00	.00 %		Auto	Peak▶ Man
	UI								Auto	iniari
x dB Bandwidth		39.16 N	IHZ	x dB		-26.	00 dB			
						OTATUS				
ISG						STATUS				


Plot 7-82. 26dB Bandwidth Plot ANT2 (40MHz BW 802.11n (UNII Band 2A) - Ch. 54)




Plot 7-83. 26dB Bandwidth Plot ANT2 (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

FCC ID: A3LSMS911U		Approved by: Technical Manager		
Test Report S/N:	Test Dates:	EUT Type:	Dege 59 of 254	
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 58 of 254	
	•	-	V9.0 02/01/2019	



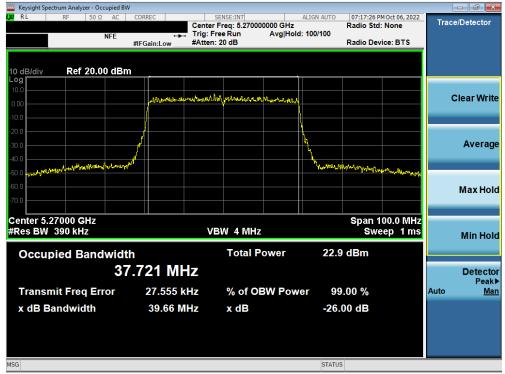


Plot 7-84. 26dB Bandwidth Plot ANT2 (40MHz BW 802.11ax (UNII Band 2A) - Ch. 54)

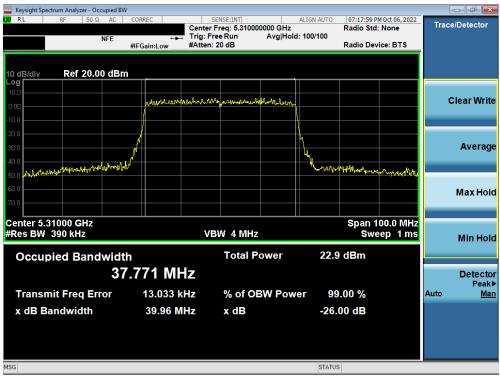

Plot 7-85. 26dB Bandwidth Plot ANT2 (40MHz BW 802.11ax (UNII Band 2A) - Ch. 62)

FCC ID: A3LSMS911U		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Daga 50 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 59 of 254
		÷	V9.0.02/01/2019



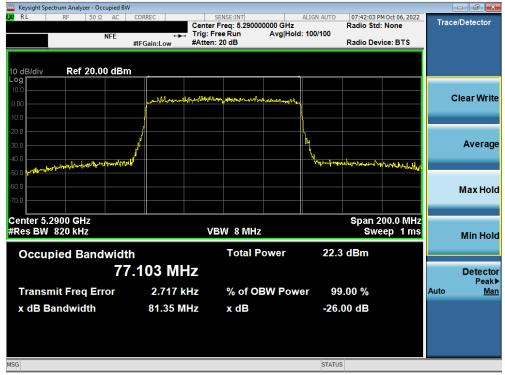


Plot 7-86. 26dB Bandwidth Plot ANT2 (80MHz BW 802.11ac (UNII Band 2A) - Ch. 58)




Plot 7-87. 26dB Bandwidth Plot ANT2 (80MHz BW 802.11ax (UNII Band 2A) - Ch. 58)

FCC ID: A3LSMS911U		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dage 60 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 60 of 254
		-	V9.0.02/01/2019



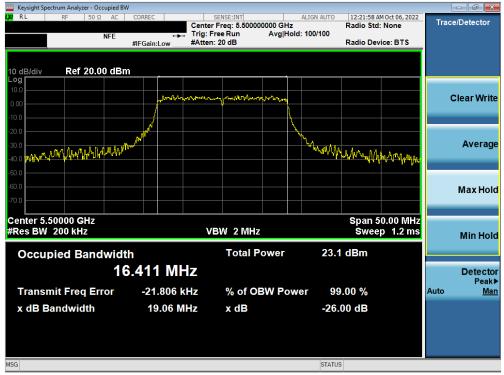


Plot 7-88. 26dB Bandwidth Plot ANT2 (802.11a (UNII Band 2C) - Ch. 100)

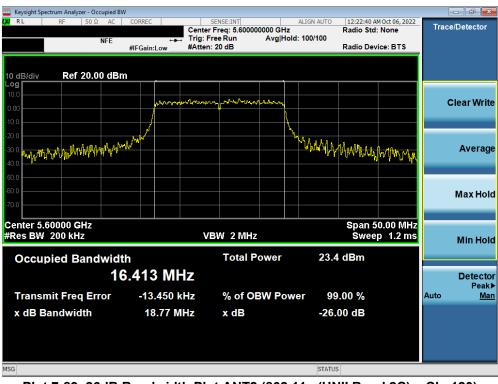


Plot 7-89. 26dB Bandwidth Plot ANT2 (802.11a (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMS911U		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dege 61 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 61 of 254
		-	V9.0.02/01/2019



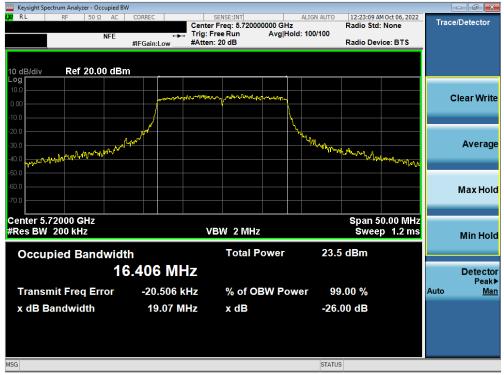


Plot 7-90. 26dB Bandwidth Plot ANT2 (802.11a (UNII Band 2C) - Ch. 144)

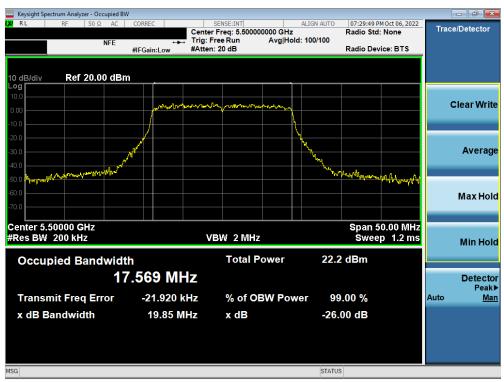


Plot 7-91. 26dB Bandwidth Plot ANT2 (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

FCC ID: A3LSMS911U		MEASUREMENT REPORT (CERTIFICATION)		
Test Report S/N:	Test Dates:	EUT Type:	Dege 62 of 254	
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 62 of 254	
			V9.0 02/01/2019	



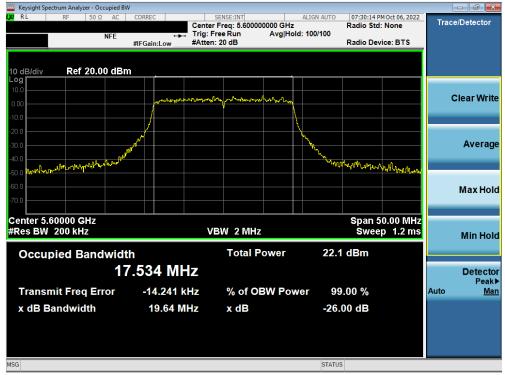


Plot 7-92. 26dB Bandwidth Plot ANT2 (20MHz BW 802.11n (UNII Band 2C) - Ch. 120)

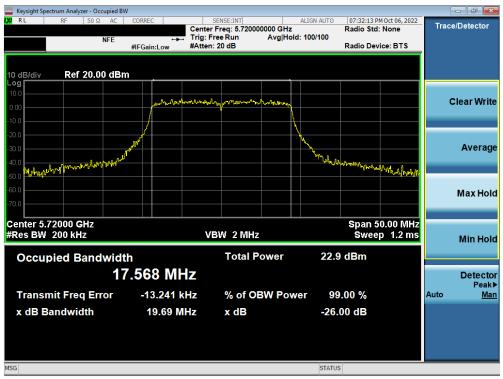


Plot 7-93. 26dB Bandwidth Plot ANT2 (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

FCC ID: A3LSMS911U		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dege 62 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 63 of 254
			V9.0 02/01/2019



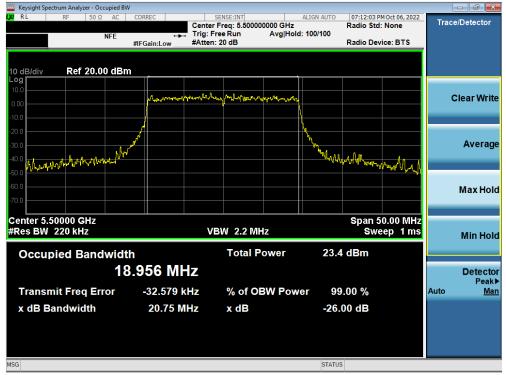


Plot 7-94. 26dB Bandwidth Plot ANT2 (20MHz BW 802.11ax (UNII Band 2C) - Ch. 100)

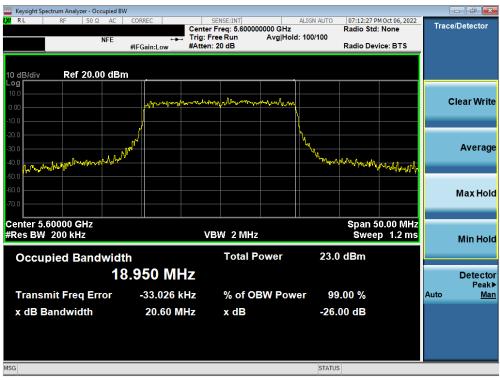


Plot 7-95. 26dB Bandwidth Plot ANT2 (20MHz BW 802.11ax (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMS911U		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dage 64 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 64 of 254
	•	÷	V9.0.02/01/2019



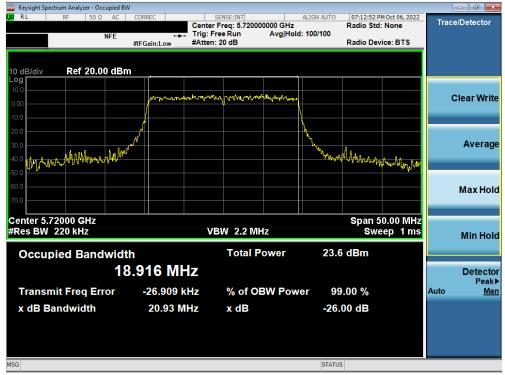

Plot 7-96. 26dB Bandwidth Plot ANT2 (20MHz BW 802.11ax (UNII Band 2C) - Ch. 144)

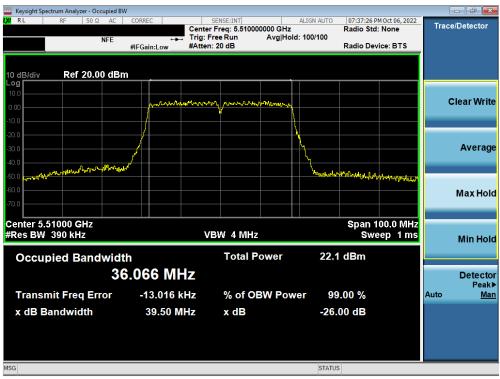


Plot 7-97. 26dB Bandwidth Plot ANT2 (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

FCC ID: A3LSMS911U		MEASUREMENT REPORT (CERTIFICATION)		
Test Report S/N:	Test Dates:	EUT Type:	Dege 65 of 254	
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 65 of 254	
		-	V9.0 02/01/2019	



Keysight Spectrum Analyzer - Occupied BW							
IXI RE 50 Ω AC		SENSE:INT Center Freq: 5.59000 Trig: Free Run #Atten: 20 dB	ALIGN AUT 00000 GHz Avg Hold: 100/100	Radio Std: I	None	Trace	Detector
10 dB/div Ref 20.00 dBm	#I Gam.Low	Antin 20 ab		Rudio Berre			
Log 10.0 0.00	Mar MAR BAR	when you and the				с	lear Write
-10.0							Average
-50.0 -60.0 -70.0				alled and a stand of the second of the secon	www.yeryano		Max Hold
Center 5.59000 GHz #Res BW 390 kHz		VBW 4 MHz	2		0.0 MHz ep 1 ms		Min Hold
Occupied Bandwidt	ո .041 MHz	Total F	Power 2	1.4 dBm			Detecto
Transmit Freq Error x dB Bandwidth	22.086 kH 39.49 MH			99.00 % 26.00 dB		Auto	Mar
MSG			STA	ATUS			

Plot 7-98. 26dB Bandwidth Plot ANT2 (40MHz BW 802.11n (UNII Band 2C) - Ch. 118)

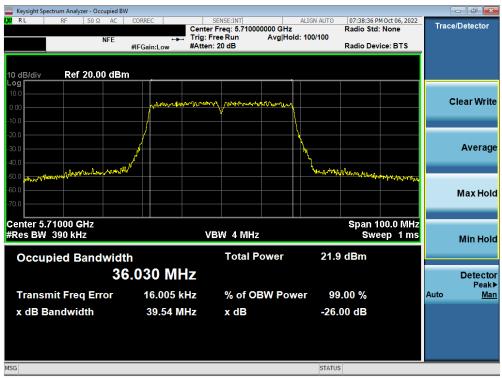


Plot 7-99. 26dB Bandwidth Plot ANT2 (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

FCC ID: A3LSMS911U		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dege 66 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 66 of 254
		·	V9.0 02/01/2019






Plot 7-100. 26dB Bandwidth Plot ANT2 (40MHz BW 802.11ax (UNII Band 2C) - Ch. 102)

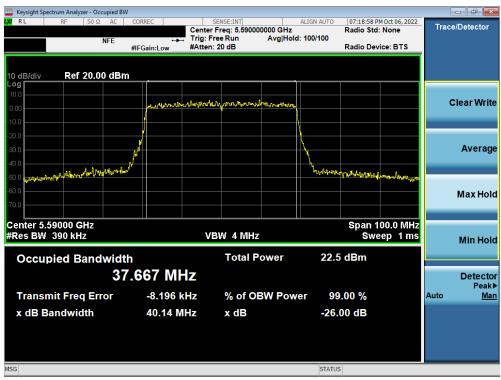


Plot 7-101. 26dB Bandwidth Plot ANT2 (40MHz BW 802.11ax (UNII Band 2C) - Ch. 118)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dege 67 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 67 of 254
			V9.0 02/01/2019



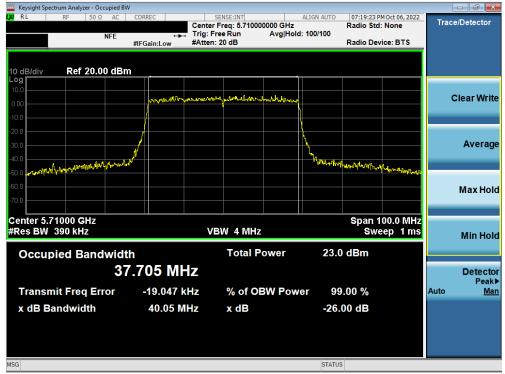

Plot 7-102. 26dB Bandwidth Plot ANT2 (40MHz BW 802.11ax (UNII Band 2C) - Ch. 142)

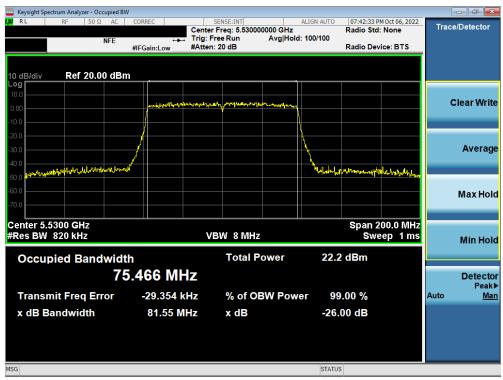


Plot 7-103. 26dB Bandwidth Plot ANT2 (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dege 69 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 68 of 254
			V9.0 02/01/2019



Keysight Spectrum Analyzer - Occupied BW	CORREC	SENSE:INT	ALIGN AUTO 07:	42:59 PM Oct 06, 2022	
KL RF SUSZ AC	Cente	r Freq: 5.610000000 GHz	Rad	io Std: None	Trace/Detector
NFE		Free Run Avg Ho n: 20 dB	ld: 100/100 Rad	io Device: BTS	
10 dB/div Ref 20.00 dBm					
Log					
0.00	Menter range and real and the	- My million market and party	n		Clear Writ
10.0					
20.0			<u> </u> \		
30.0			<u> \</u>		Averag
-40.0	p/			hundrenterenterenterenteren	
50.0 Manutan mary Wranny market			. Minist an Anal Annal	and the for the section of the section of	
-60.0					Max Hol
-70.0					
Center 5.6100 GHz			Sp	an 200.0 MHz	
#Res BW 820 kHz	V	/BW 8 MHz		Sweep 1 ms	Min Hol
Occupied Bandwidt	h	Total Power	21.6 dB	m	
	.448 MHz				Detecto
					Peak
Transmit Freq Error	37.645 kHz	% of OBW Pov	ver 99.00	%	Auto <u>Ma</u>
x dB Bandwidth	80.96 MHz	x dB	-26.00 d	В	
SG			STATUS		


Plot 7-104. 26dB Bandwidth Plot ANT2 (80MHz BW 802.11ac (UNII Band 2C) - Ch. 122)

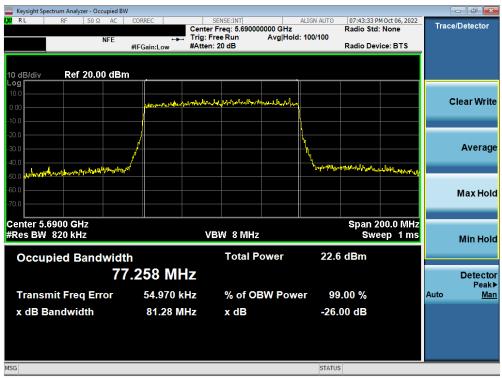


Plot 7-105. 26dB Bandwidth Plot ANT2 (80MHz BW 802.11ac (UNII Band 2C) - Ch. 138)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dege 60 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 69 of 254
		·	V9.0 02/01/2019



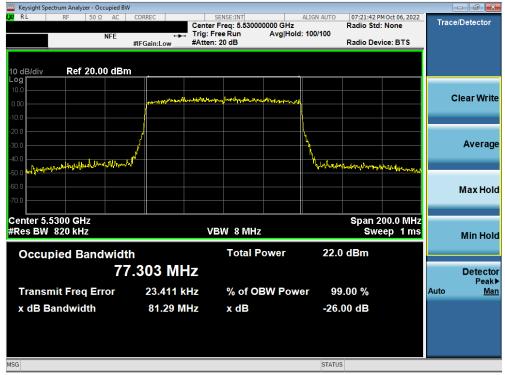


Plot 7-106. 26dB Bandwidth Plot ANT2 (80MHz BW 802.11ax (UNII Band 2C) - Ch. 106)

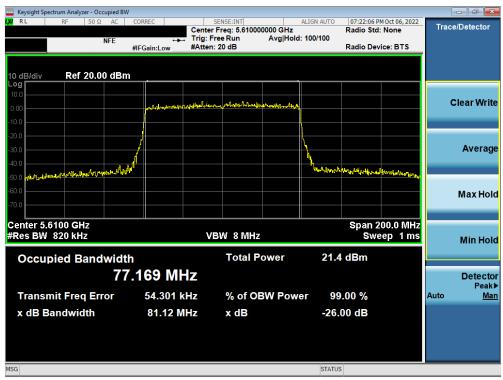


Plot 7-107. 26dB Bandwidth Plot ANT2 (80MHz BW 802.11ax (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dage 70 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 70 of 254
		÷	V9.0.02/01/2019



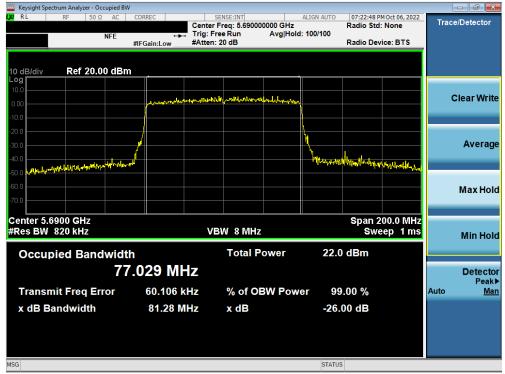

Plot 7-108. 26dB Bandwidth Plot ANT2 (80MHz BW 802.11ax (UNII Band 2C) - Ch. 138)

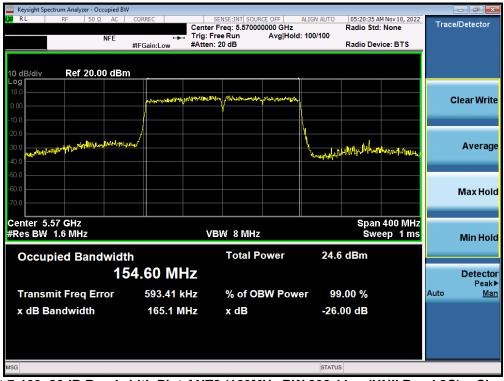

Plot 7-109. 26dB Bandwidth Plot ANT2 (160MHz BW 802.11ac (UNII Band 2C) – Ch. 114)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dego 71 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 71 of 254
		÷	V9.0.02/01/2019



Keysight Spectrum Analyzer - Occupied BW K R L R F 50 Ω AC	CORREC	SENSE:INT	ALIGN AUTO		M Oct 10, 2022	Trace/Det	
	Trig:	r Freq: 5.57000000 Free Run A n: 30 dB	vg Hold: 100/100	Radio Std Radio Dev			
10 dB/div Ref 20.00 dBm							
.og						Clea	r Writ
0.00	and the second s	12.254 personal de la constante	~~~~~~				
20.0						A۱	/erac
40.0 Honter to reader to the month of the state of the second	logul		Last marged	motranpopelist	fals, landspreder		
50.0						Ма	x Hol
70.0							
Center 5.5700 GHz #Res BW 200 kHz	۱	/BW 2 MHz			00.0 MHz 9.267 ms	Mi	n Hol
Occupied Bandwidth		Total Pow	ver 22.8	dBm			
15	6.39 MHz					De	etecto Peak
Transmit Freq Error	125.27 kHz	% of OBW	Power 99	.00 %		Auto	Ma
x dB Bandwidth	160.9 MHz	x dB	-26.	00 dB			
SG			STATUS	5			

Plot 7-110. 26dB Bandwidth Plot ANT2 (160MHz BW 802.11ax (UNII Band 2C) - Ch. 114)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Daga 72 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 72 of 254
			\/0.0.02/01/2010



7.3 6dB Bandwidth Measurement – 802.11a/n/ac/ax

<u>§15.407 (e); RSS-Gen [6.2]</u>

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

In the 5.725 – 5.850GHz band and 5.850 – 5.895GHz band, the 6dB bandwidth must be \geq 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 6.9.2 KDB 789033 D02 v02r01 – Section C

Test Settings

- The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 100 kHz
- 3. VBW \geq 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.





Test Notes

None.


FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dago 72 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 73 of 254
	•		V9.0 02/01/2019



MIMO Antenna-1 6 dB Bandwidth Measurements

-	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
	5745	149	а	6	16.38
	5785	157	а	6	16.35
	5825	165	а	6	16.32
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	17.56
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	17.56
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	17.56
e	5745	149	ax (20MHz)	6.5/7.2 (MCS0)	18.69
Band	5785	157	ax (20MHz)	6.5/7.2 (MCS0)	18.95
ä	5825	165	ax (20MHz)	6.5/7.2 (MCS0)	19.05
	5755	151	n (40MHz)	13.5/15 (MCS0)	35.46
	5795	159	n (40MHz)	13.5/15 (MCS0)	35.59
	5755	151	ax (40MHz)	13.5/15 (MCS0)	36.51
	5795	159	ax (40MHz)	13.5/15 (MCS0)	38.13
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	75.62
	5775	155	ax (80MHz)	29.3/32.5 (MCS0)	78.00


Table 7-4. Conducted Bandwidth Measurements MIMO ANT1

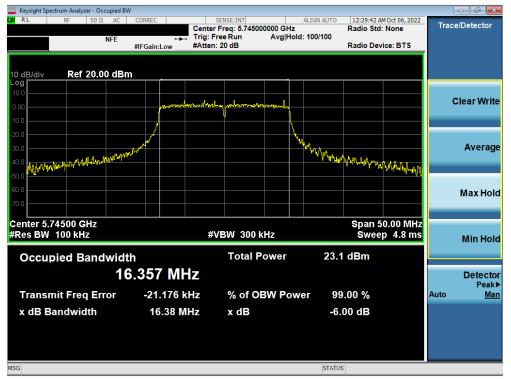


Plot 7-111. 6dB Bandwidth Plot ANT1 (802.11a (UNII Band 3) - Ch. 149)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Daga 74 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 74 of 254
		·	\/9.0.02/01/2019



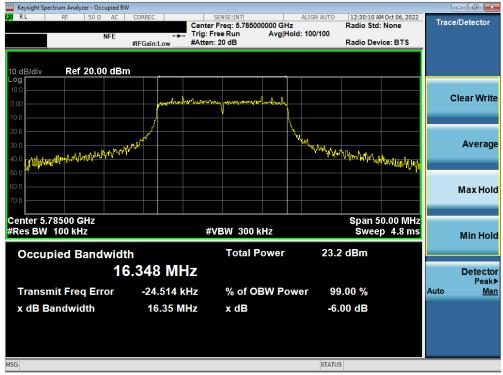


Plot 7-112. 6dB Bandwidth Plot ANT1 (802.11a (UNII Band 3) - Ch. 157)

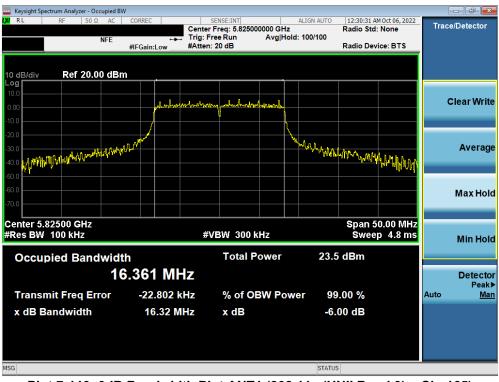


Plot 7-113. 6dB Bandwidth Plot ANT1 (802.11a (UNII Band 3) – Ch. 165)

FCC ID: A3LSMS911U		MEASUREMENT REPORT (CERTIFICATION)	
Test Report S/N:	Test Dates:	EUT Type:	Dega 75 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	Page 75 of 254
			V9.0 02/01/2019



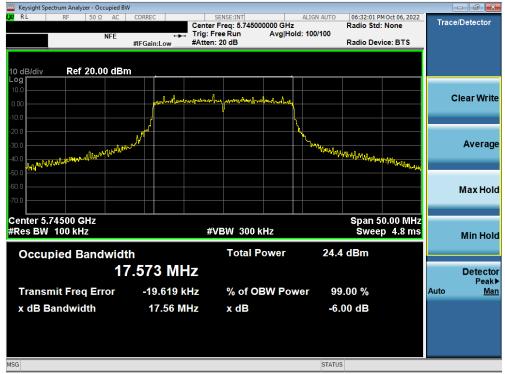

Plot 7-114. 6dB Bandwidth Plot ANT1 (20MHz BW 802.11n (UNII Band 3) - Ch. 149)

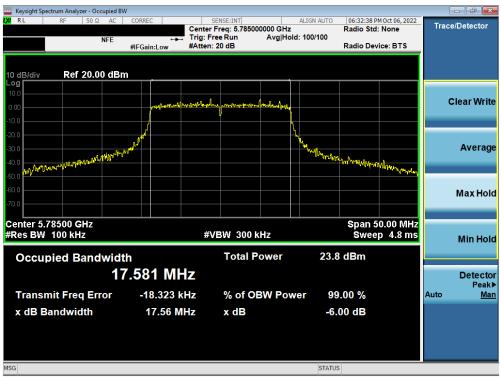

Plot 7-115. 6dB Bandwidth Plot ANT1 (20MHz BW 802.11n (UNII Band 3) - Ch. 157)

FCC ID: A3LSMS911U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 76 of 254
1M2209010096-13-R1.A3L	09/02 - 11/08/2022	Portable Handset	
V9 0 02/01/2019			