

PART 27 MEASUREMENT REPORT

Applicant Name:
 Samsung Electronics Co., Ltd.
 129, Samsung-ro,
 Yeongtong-gu, Suwon-si
 Gyeonggi-do, 16677, Korea

Date of Testing:
 10/11/2022 - 11/15/2022
Test Report Issue Date:
 12/5/2022
Test Site/Location:
 Element lab., Columbia, MD, USA
Test Report Serial No.:
 1M2209010096-05-R1.A3L

FCC ID:	A3LSMS911U
Applicant Name:	Samsung Electronics Co., Ltd.

Application Type: Certification
Model: SM-S911U
Additional Model(s): SM-S911U1
EUT Type: Portable Handset
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part: 27
Test Procedure(s): ANSI C63.26-2015, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

Note: This revised Test Report (S/N: 1M2209010096-05-R1.A3L) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez
Executive Vice President



FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 1 of 200

TABLE OF CONTENTS

1.0	INTRODUCTION	5
1.1	Scope	5
1.2	Element Test Location.....	5
1.3	Test Facility / Accreditations.....	5
2.0	PRODUCT INFORMATION.....	6
2.1	Equipment Description	6
2.2	Device Capabilities.....	6
2.3	Test Configuration	6
2.4	Software and Firmware	7
2.5	EMI Suppression Device(s)/Modifications	7
3.0	DESCRIPTION OF TESTS	8
3.1	Evaluation Procedure	8
3.2	Radiated Power and Radiated Spurious Emissions	8
4.0	MEASUREMENT UNCERTAINTY	9
5.0	TEST EQUIPMENT CALIBRATION DATA	10
6.0	SAMPLE CALCULATIONS	11
7.0	TEST RESULTS	12
7.1	Summary.....	12
7.2	Conducted Output Power Data	13
7.3	Occupied Bandwidth	22
7.4	Spurious and Harmonic Emissions at Antenna Terminal	59
7.5	Band Edge Emissions at Antenna Terminal.....	88
7.6	Peak-Average Ratio	120
7.7	Radiated Power (EIRP).....	157
7.8	Radiated Spurious Emissions Measurements.....	165
7.9	Frequency Stability / Temperature Variation	198
8.0	CONCLUSION.....	200

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 2 of 200

PART 27 MEASUREMENT REPORT

Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
NR Band n77 PC2 (3450 - 3550MHz)	100 MHz	$\pi/2$ BPSK	3500.0	0.276	24.41	96M8G7D
		QPSK	3500.0	0.262	24.18	97M8G7D
		16QAM	3500.0	0.198	22.96	97M9W7D
	90 MHz	$\pi/2$ BPSK	3495.0 - 3505.0	0.266	24.25	87M4G7D
		QPSK	3495.0 - 3505.0	0.253	24.03	87M9G7D
		16QAM	3495.0 - 3505.0	0.183	22.62	87M6W7D
	80 MHz	$\pi/2$ BPSK	3490.0 - 3510.0	0.266	24.24	77M5G7D
		QPSK	3490.0 - 3510.0	0.253	24.03	77M7G7D
		16QAM	3490.0 - 3510.0	0.178	22.50	77M8W7D
	70 MHz	$\pi/2$ BPSK	3485.0 - 3515.0	0.266	24.25	64M8G7D
		QPSK	3485.0 - 3515.0	0.257	24.09	67M8G7D
		16QAM	3485.0 - 3515.0	0.187	22.71	67M7W7D
	60 MHz	$\pi/2$ BPSK	3480.0 - 3520.0	0.273	24.36	58M0G7D
		QPSK	3480.0 - 3520.0	0.261	24.17	58M1G7D
		16QAM	3480.0 - 3520.0	0.194	22.88	58M0W7D
	50 MHz	$\pi/2$ BPSK	3475.0 - 3525.0	0.271	24.33	46M0G7D
		QPSK	3475.0 - 3525.0	0.259	24.13	47M8G7D
		16QAM	3475.0 - 3525.0	0.189	22.77	47M7W7D
	40 MHz	$\pi/2$ BPSK	3470.0 - 3530.0	0.281	24.49	36M0G7D
		QPSK	3470.0 - 3530.0	0.275	24.39	38M0G7D
		16QAM	3470.0 - 3530.0	0.202	23.05	38M2W7D
	30 MHz	$\pi/2$ BPSK	3465.0 - 3535.0	0.285	24.55	27M0G7D
		QPSK	3465.0 - 3535.0	0.269	24.30	28M0G7D
		16QAM	3465.0 - 3535.0	0.199	22.99	28M0W7D
	25 MHz	$\pi/2$ BPSK	3462.5 3537.5	0.295	24.70	23M0G7D
		QPSK	3462.5 3537.5	0.281	24.48	23M3G7D
		16QAM	3462.5 3537.5	0.209	23.19	23M3W7D
	20 MHz	$\pi/2$ BPSK	3460.0 - 3540.0	0.287	24.58	18M0G7D
		QPSK	3460.0 - 3540.0	0.274	24.37	18M4G7D
		16QAM	3460.0 - 3540.0	0.203	23.08	18M4W7D
	15 MHz	$\pi/2$ BPSK	3457.5 - 3542.5	0.287	24.57	13M0G7D
		QPSK	3457.5 - 3542.5	0.268	24.28	13M7G7D
		16QAM	3457.5 - 3542.5	0.196	22.92	13M6W7D
	10 MHz	$\pi/2$ BPSK	3455.0 - 3545.0	0.275	24.39	8M65G7D
		QPSK	3455.0 - 3545.0	0.260	24.15	8M68G7D
		16QAM	3455.0 - 3545.0	0.195	22.89	8M71W7D

EUT Overview (n77 PC2 - DoD Band)

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 3 of 200

Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
NR Band n77 PC2 (3700 - 3980MHz)	100 MHz	$\pi/2$ BPSK	3750.0 - 3930.0	0.263	24.19	96M6G7D
		QPSK	3750.0 - 3930.0	0.284	24.53	97M9G7D
		16QAM	3750.0 - 3930.0	0.240	23.79	98M0W7D
	90 MHz	$\pi/2$ BPSK	3745.0 - 3935.0	0.287	24.58	87M2G7D
		QPSK	3745.0 - 3935.0	0.339	25.30	87M8G7D
		16QAM	3745.0 - 3935.0	0.247	23.93	87M9W7D
	80 MHz	$\pi/2$ BPSK	3740.0 - 3940.0	0.291	24.63	77M5G7D
		QPSK	3740.0 - 3940.0	0.343	25.35	77M8G7D
		16QAM	3740.0 - 3940.0	0.250	23.98	77M8W7D
	70 MHz	$\pi/2$ BPSK	3735.0 - 3945.0	0.299	24.75	64M6G7D
		QPSK	3735.0 - 3945.0	0.331	25.20	67M7G7D
		16QAM	3735.0 - 3945.0	0.241	23.82	67M7W7D
	60 MHz	$\pi/2$ BPSK	3730.0 - 3950.0	0.307	24.87	58M0G7D
		QPSK	3730.0 - 3950.0	0.354	25.49	58M2G7D
		16QAM	3730.0 - 3950.0	0.250	23.98	58M2W7D
	50 MHz	$\pi/2$ BPSK	3725.0 - 3955.0	0.313	24.95	45M9G7D
		QPSK	3725.0 - 3955.0	0.353	25.47	47M5G7D
		16QAM	3725.0 - 3955.0	0.253	24.02	47M7W7D
	40 MHz	$\pi/2$ BPSK	3720.0 - 3960.0	0.319	25.03	36M0G7D
		QPSK	3720.0 - 3960.0	0.373	25.71	38M0G7D
		16QAM	3720.0 - 3960.0	0.268	24.27	38M0W7D
	30 MHz	$\pi/2$ BPSK	3715.0 - 3965.0	0.312	24.93	27M0G7D
		QPSK	3715.0 - 3965.0	0.369	25.66	27M9G7D
		16QAM	3715.0 - 3965.0	0.268	24.27	28M0W7D
	25 MHz	$\pi/2$ BPSK	3712.5 - 3967.5	0.308	24.88	22M9G7D
		QPSK	3712.5 - 3967.5	0.367	25.64	23M3G7D
		16QAM	3712.5 - 3967.5	0.263	24.20	23M3W7D
	20 MHz	$\pi/2$ BPSK	3710.0 - 3970.0	0.303	24.81	18M0G7D
		QPSK	3710.0 - 3970.0	0.358	25.54	18M4G7D
		16QAM	3710.0 - 3970.0	0.260	24.15	18M3W7D
15 MHz	$\pi/2$ BPSK	3707.5 - 3972.5	0.301	24.78	12M9G7D	
	QPSK	3707.5 - 3972.5	0.356	25.51	13M7G7D	
	16QAM	3707.5 - 3972.5	0.254	24.05	13M7W7D	
10 MHz	$\pi/2$ BPSK	3705.0 - 3975.0	0.291	24.63	8M65G7D	
	QPSK	3705.0 - 3975.0	0.347	25.40	8M64G7D	
	16QAM	3705.0 - 3975.0	0.247	23.92	8M63W7D	

EUT Overview (n77 PC2 - C-Band)

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 4 of 200

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

These measurement tests were conducted at the Element laboratory located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreement.

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 5 of 200

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMS911U**. This device has n77 operation over four total antennas in both the DoD Band (3.45 – 3.55GHz) and the C-Band (3.7 – 3.98GHz). The test data contained in this report pertains to both supported n77 bands and all four antennas.

Test Device Serial No.: 0125M, 0237M, 0238M, 0241M, 0275M, 0371M, 0441M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR (FR1 and FR2), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz and 6GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer

This device uses a tuner circuit that dynamically updates the antenna impedance parameters to optimize antenna performance for certain bands and modes of operation. The tuner for this device was set to simulate a "free space" condition where the transmit antenna is matched to the medium into which it is transmitting and, thus, the power is at its maximum level.

This device can transmit in the 5G NR Band n77 over four separate antennas labelled SRS-1, SRS-2, SRS-3, and SRS-4. With SRS operations, any of these four antennas can transmit an SRS signal to check the channel quality for transmission in the n77 Band. However, these antennas cannot simultaneously transmit and only the SRS-1 antenna is capable of data transmission. The test data is marked to indicate the specific antenna transmitting in the n77 band.

Each of the transmission antennas investigated in this report may have an alternate labelling in other exhibits and filings. The correlation between these labelling schemes is displayed in the following table.

Antenna SRS-label	Alternate Label
SRS-1	Ant F
SRS-2	Ant C
SRS-3	Ant I
SRS-4	Ant D

Table 2-1. Antenna Labelling Scheme Correlation

2.3 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 6 of 200



2.4 Software and Firmware

Testing was performed on device(s) using software/firmware version S911USQU0AVJM installed on the EUT.

2.5 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 7 of 200

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services” (ANSI C63.26-2015) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI C63.26-2015. For emissions below 1GHz, a half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [dBm] = P_g [dBm] - \text{cable loss} [dB] + \text{antenna gain} [dBd/dBi];$$

where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g [dBm] - \text{cable loss} [dB]$.

For radiated spurious emissions measurements, the field strength conversion method is used per the formulas in Section 5.2.7 of ANSI C63.26-2015. Field Strength (EIRP) is calculated using the following formulas:

$$E_{[dB\mu V/m]} = \text{Measured amplitude level}_{[dBm]} + 107 + \text{Cable Loss}_{[dB]} + \text{Antenna Factor}_{[dB/m]}$$

And

$$\text{EIRP}_{[dBm]} = E_{[dB\mu V/m]} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015.

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 8 of 200

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 9 of 200

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AP2	EMC Cable and Switch System	8/11/2022	Annual	8/11/2023	AP2
-	AP1	EMC Cable and Switch System	8/15/2022	Annual	8/15/2023	AP1
-	ETS	EMC Cable and Switch System	8/11/2022	Annual	8/11/2023	ETS
-	LTx1	Licensed Transmitter Cable Set	7/29/2022	Annual	7/29/2023	LTx1
-	LTx2	Licensed Transmitter Cable Set	8/15/2022	Annual	8/15/2023	LTx2
-	LTx3	Licensed Transmitter Cable Set	8/15/2022	Annual	8/15/2023	LTx3
-	LTx4	Licensed Transmitter Cable Set	7/29/2022	Annual	7/29/2023	LTx4
-	LTx5	Licensed Transmitter Cable Set	7/29/2022	Annual	7/29/2023	LTx5
Agilent	E5515C	Wireless Communications Test Set	N/A			GB45360985
Agilent	E5515C	Wireless Communications Test Set	N/A			GB46310798
Anritsu	MT8820C	Radio Communication Analyzer	N/A			6201300731
Anritsu	MT8821C	Radio Communication Analyzer	N/A			6201381794
Anritsu	MT8821C	Radio Communication Analyzer	N/A			6200901190
Anritsu	MT8821C	Radio Communication Analyzer	N/A			6201525694
Com-Power	AL-130R	Active Loop Antenna	1/19/2022	Biennial	1/19/2024	121085
Emco	3115	Horn Antenna (1-18GHz)	8/8/2022	Biennial	8/8/2024	9704-5182
Espec	ESX-2CA	Environmental Chamber	5/25/2022	Biennial	5/25/2024	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	4/20/2021	Biennial	4/20/2023	00125518
ETS Lindgren	3164-10	Quad Ridge Horn 400MHz - 10000MHz	5/10/2021	Biennial	5/10/2023	00166283
ETS Lindgren	3816/2NM	LISN	8/11/2022	Biennial	8/11/2024	00114451
Keysight Technologies	N9020A	MXA Signal Analyzer	3/15/2022	Annual	3/15/2023	MY54500644
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	8/18/2022	Annual	8/18/2023	MY49430494
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	2/14/2022	Annual	2/14/2023	MY52350166
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11208010032
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11403100002
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			100976
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			112347
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	8/29/2022	Annual	8/29/2023	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	8/25/2022	Annual	8/25/2023	100348
Rohde & Schwarz	ESW44	EMI Test Receiver 2Hz to 44 GHz	3/28/2022	Annual	3/28/2023	101716
Rohde & Schwarz	FSW26	2Hz-26.5GHz Signal and Spectrum Analyzer	4/14/2022	Annual	4/14/2023	103187
Sunol	JB6	LB6 Antenna	11/13/2020	Biennial	11/13/2022	A082816

Table 5-1. Test Equipment

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1-A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 10 of 200

6.0 SAMPLE CALCULATIONS

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 11 of 200

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMS911U
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): NR

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Transmitter Conducted Output Power	2.1046(a), 2.1046(c)	N/A	PASS	Section 7.2
	Occupied Bandwidth	2.1049(h)	N/A	PASS	Section 7.3
	Conducted Band Edge / Spurious Emissions (NR Band n77)	2.1051, 27.53(l), 27.53(n)	≤ 13 dBm / MHz	PASS	Sections 7.4, 7.5
	Peak-to-Average Ratio (NR Band n77)	27.53(j)(4), 27.53(k)(4)	≤ 13 dB	PASS	Section 7.6
	Frequency Stability	2.1055, 27.54	Fundamental emissions stay within authorized frequency block.	PASS	Section 7.9
RADIATED	Effective Radiated Power / Equivalent Isotropic Radiated Power (NR Band n77)	27.53(j)(3), 27.53(k)(3)	≤ 1 Watt EIRP	PASS	Section 7.7
	Radiated Spurious Emissions (NR Band n77)	2.1053, 27.53(l), 27.53(n)	≤ 13 dBm / MHz	PASS	Section 7.8

* The only transmitter output conducted powers included in this report are those where the Pmax value, per the tune-up document, is higher than any of the DSI power levels. For the remaining conducted power measurements, see the **RF Exposure Report**.

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is EMC Software Tool v1.1.
- 5) This device operates in the n77 band on four different transmission antennas. The main antenna (label: SRS-1) operates at the highest transmit power. The three additional antennas each operate at a lower power compared to the main antenna. Therefore, to demonstrate compliance for each antenna, a complete set of test data is shown for antenna SRS-1 and only a subset of test data is included for the additional three antennas.

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 12 of 200

7.2 Conducted Output Power Data

Test Overview

All emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 – Section 5.2

Test Settings

1. Span = 2 x OBW to 3 x OBW
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

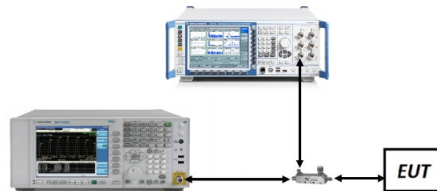


Figure 7-1. Test Instrument & Measurement Setup

Test Notes

- 1) Standalone NR conducted power measurements were evaluated using various combinations of RB size, RB offset, modulation, and channel bandwidth. For each supported combination of channel bandwidth/modulation, the worst case data is displayed in this section.
- 2) For transmission in EN-DC mode, conducted power measurements were investigated with the NR carrier set to transmit from the worst case antenna in standalone mode (SRS-1).

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 13 of 200



NR Band n77 (PC2) - DoD Band

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
100 MHz	$\pi/2$ BPSK	633334	3500.01	1 / 68	26.48
	QPSK	633334	3500.01	1 / 68	26.36
	16-QAM	633334	3500.01	1 / 68	25.52
90 MHz	$\pi/2$ BPSK	633000	3495.00	1 / 122	26.21
		633334	3500.01	1 / 122	26.26
		633666	3504.99	1 / 122	26.32
	QPSK	633000	3495.00	1 / 122	26.10
		633334	3500.01	1 / 122	26.15
		633666	3504.99	1 / 122	26.21
16-QAM	633334	3500.01	1 / 122	25.18	
80 MHz	$\pi/2$ BPSK	632668	3490.02	1 / 162	26.31
		633334	3500.01	1 / 162	26.09
		634000	3510.00	1 / 108	26.11
	QPSK	632668	3490.02	1 / 162	26.21
		633334	3500.01	1 / 162	26.04
		634000	3510.00	1 / 108	26.09
16-QAM	633334	3500.01	1 / 162	25.06	
70 MHz	$\pi/2$ BPSK	632334	3485.01	1 / 141	26.26
		633334	3500.01	1 / 94	26.27
		634332	3514.98	1 / 141	26.32
	QPSK	632334	3485.01	1 / 141	26.17
		633334	3500.01	1 / 94	26.15
		634332	3514.98	1 / 141	26.27
16-QAM	634332	3514.98	1 / 47	25.27	
60 MHz	$\pi/2$ BPSK	632000	3480.00	1 / 121	26.43
		633334	3500.01	1 / 81	26.41
		634666	3519.99	1 / 81	26.33
	QPSK	632000	3480.00	1 / 121	26.35
		633334	3500.01	1 / 81	26.35
		634666	3519.99	1 / 81	26.27
16-QAM	632000	3480.00	1 / 81	25.44	
50 MHz	$\pi/2$ BPSK	631668	3475.02	1 / 33	26.22
		633334	3500.01	1 / 33	26.40
		635000	3525.00	1 / 33	26.36
	QPSK	631668	3475.02	1 / 33	26.17
		633334	3500.01	1 / 33	26.31
		635000	3525.00	1 / 33	26.28
16-QAM	633334	3500.01	1 / 99	25.33	

Table 7-2. Conducted Power Data (NR Band n77 - DoD Band – 50MHz-100MHz Bandwidths – SRS-1)

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 14 of 200

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
40 MHz	π/2 BPSK	631334	3470.01	1 / 79	26.55
		633334	3500.01	1 / 79	26.56
		635332	3529.98	1 / 79	26.54
	QPSK	631334	3470.01	1 / 79	26.43
		633334	3500.01	1 / 79	26.50
		635332	3529.98	1 / 79	26.57
16-QAM	631334	3470.01	1 / 79	25.61	
30 MHz	π/2 BPSK	631000	3465.00	1 / 58	26.55
		633334	3500.01	1 / 58	26.53
		635666	3534.99	1 / 58	26.62
	QPSK	631000	3465.00	1 / 58	26.46
		633334	3500.01	1 / 58	26.48
		635666	3534.99	1 / 19	26.47
16-QAM	635666	3534.99	1 / 58	25.55	
25 MHz	π/2 BPSK	630834	3462.51	1 / 48	26.53
		633334	3500.01	1 / 48	26.64
		635832	3537.48	1 / 48	26.77
	QPSK	630834	3462.51	1 / 48	26.44
		633334	3500.01	1 / 48	26.52
		635832	3537.48	1 / 48	26.66
16-QAM	635832	3537.48	1 / 48	25.75	
20 MHz	π/2 BPSK	630668	3460.02	1 / 37	26.56
		633334	3500.01	1 / 37	26.65
		636000	3540.00	1 / 37	26.65
	QPSK	630668	3460.02	1 / 25	26.36
		633334	3500.01	1 / 37	26.54
		636000	3540.00	1 / 37	26.55
16-QAM	636000	3540.00	1 / 25	25.64	
15 MHz	π/2 BPSK	630500	3457.50	1 / 28	26.44
		633334	3500.01	1 / 28	26.54
		636166	3542.49	1 / 28	26.64
	QPSK	630500	3457.50	1 / 28	26.39
		633334	3500.01	1 / 28	26.43
		636166	3542.49	1 / 19	26.46
16-QAM	636166	3542.49	1 / 28	25.48	
10 MHz	π/2 BPSK	630334	3455.01	1 / 17	26.30
		633334	3500.01	1 / 17	26.41
		636332	3544.98	1 / 17	26.46
	QPSK	630334	3455.01	1 / 17	26.13
		633334	3500.01	1 / 17	26.33
		636332	3544.98	1 / 17	26.32
16-QAM	633334	3500.01	1 / 17	25.45	

Table 7-3. Conducted Power Data (NR Band n77 - DoD Band – 10MHz-40MHz Bandwidths – SRS-1)

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 15 of 200

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
100 MHz	$\pi/2$ BPSK	633334	3500.01	1 / 136	21.76
	QPSK	633334	3500.01	1 / 136	21.33
	16-QAM	633334	3500.01	1 / 136	20.82

Table 7-4. Conducted Power Data (NR Band n77 - DoD Band – SRS-2)

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
100 MHz	$\pi/2$ BPSK	633334	3500.01	273 / 0	22.82
	QPSK	633334	3500.01	1 / 68	22.61
	16-QAM	633334	3500.01	1 / 68	22.24

Table 7-5. Conducted Power Data (NR Band n77 - DoD Band – SRS-3)

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
100 MHz	$\pi/2$ BPSK	633334	3500.01	1 / 204	21.48
	QPSK	633334	3500.01	1 / 204	21.26
	16-QAM	633334	3500.01	1 / 204	20.49

Table 7-6. Conducted Power Data (NR Band n77 - DoD Band – SRS-4)

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 16 of 200

NR Band n77 (PC2) - C-Band

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
100 MHz	π/2 BPSK	650000	3750.00	1 / 68	25.98
		656000	3840.00	1 / 204	25.73
		662000	3930.00	1 / 204	25.13
	QPSK	650000	3750.00	1 / 68	26.06
		656000	3840.00	1 / 204	25.17
		662000	3930.00	1 / 204	24.65
16-QAM	662000	3930.00	1 / 204	24.36	
90 MHz	π/2 BPSK	649668	3745.02	1 / 183	25.72
		656000	3840.00	1 / 61	25.58
		662332	3934.98	1 / 183	25.52
	QPSK	649668	3745.02	1 / 183	25.68
		656000	3840.00	1 / 183	25.51
		662332	3934.98	1 / 183	25.42
16-QAM	662332	3934.98	1 / 61	24.50	
80 MHz	π/2 BPSK	649334	3740.01	1 / 108	25.70
		656000	3840.00	1 / 108	25.68
		662666	3939.99	1 / 108	25.57
	QPSK	649334	3740.01	1 / 108	25.55
		656000	3840.00	1 / 162	25.52
		662666	3939.99	1 / 54	25.47
16-QAM	662666	3939.99	1 / 108	24.55	
70 MHz	π/2 BPSK	649000	3735.00	1 / 94	25.68
		656000	3840.00	1 / 141	25.62
		663000	3945.00	1 / 141	25.69
	QPSK	649000	3735.00	1 / 94	25.52
		656000	3840.00	1 / 94	25.44
		663000	3945.00	1 / 94	25.32
16-QAM	663000	3945.00	1 / 47	24.39	
60 MHz	π/2 BPSK	648668	3730.02	1 / 121	25.97
		656000	3840.00	1 / 121	25.68
		663332	3949.98	1 / 121	25.81
	QPSK	648668	3730.02	1 / 81	25.67
		656000	3840.00	1 / 81	25.45
		663332	3949.98	1 / 121	25.61
16-QAM	663332	3949.98	1 / 121	24.55	
50 MHz	π/2 BPSK	648334	3725.01	1 / 99	25.89
		656000	3840.00	1 / 99	25.75
		663666	3954.99	1 / 66	25.89
	QPSK	648334	3725.01	1 / 33	25.55
		656000	3840.00	1 / 99	25.52
		663666	3954.99	1 / 99	25.59
16-QAM	663666	3954.99	1 / 99	24.59	

Table 7-7. Conducted Power Data (NR Band n77 - C-Band – 50MHz-100MHz Bandwidths – SRS-1)

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 17 of 200

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
40 MHz	π/2 BPSK	648000	3720.00	1 / 79	26.16
		656000	3840.00	1 / 26	25.95
		664000	3960.00	1 / 79	25.97
	QPSK	648000	3720.00	1 / 53	26.01
		656000	3840.00	1 / 79	25.72
		664000	3960.00	1 / 26	25.83
	16-QAM	664000	3960.00	1 / 79	24.84
30 MHz	π/2 BPSK	647668	3715.02	1 / 58	26.02
		656000	3840.00	1 / 19	25.81
		664332	3964.98	1 / 58	25.87
	QPSK	647668	3715.02	1 / 19	25.93
		656000	3840.00	1 / 19	25.73
		664332	3964.98	1 / 58	25.78
	16-QAM	664332	3964.98	1 / 58	24.84
25 MHz	π/2 BPSK	647500	3712.50	1 / 16	26.04
		656000	3840.00	1 / 48	25.76
		664500	3967.50	1 / 16	25.82
	QPSK	647500	3712.50	1 / 16	25.95
		656000	3840.00	1 / 48	25.70
		664500	3967.50	1 / 16	25.76
	16-QAM	664500	3967.50	1 / 16	24.77
20 MHz	π/2 BPSK	647334	3710.01	1 / 13	25.98
		656000	3840.00	1 / 13	25.66
		664666	3969.99	1 / 13	25.75
	QPSK	647334	3710.01	1 / 13	25.90
		656000	3840.00	1 / 37	25.61
		664666	3969.99	1 / 37	25.66
	16-QAM	664666	3969.99	1 / 13	24.72
15 MHz	π/2 BPSK	647168	3707.52	1 / 19	25.92
		656000	3840.00	1 / 28	25.67
		664832	3972.48	1 / 19	25.72
	QPSK	647168	3707.52	1 / 9	25.87
		656000	3840.00	1 / 28	25.57
		664832	3972.48	1 / 19	25.63
	16-QAM	664832	3972.48	1 / 19	24.62
10 MHz	π/2 BPSK	647000	3705.00	1 / 17	25.85
		656000	3840.00	1 / 12	25.67
		664332	3975.00	1 / 6	25.57
	QPSK	647000	3705.00	1 / 17	25.73
		656000	3840.00	1 / 12	25.53
		664332	3975.00	1 / 6	25.52
	16-QAM	664332	3975.00	1 / 6	24.49

Table 7-8. Conducted Power Data (NR Band n77 - C-Band – 10MHz-40MHz Bandwidths – SRS-1)

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 18 of 200

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
100 MHz	π/2 BPSK	650000	3750.00	1 / 136	21.73
		656000	3840.00	273 / 0	21.69
		662000	3930.00	1 / 204	21.56
	QPSK	650000	3750.00	1 / 136	21.58
		656000	3840.00	273 / 0	21.30
		662000	3930.00	1 / 204	21.57
	16-QAM	662000	3930.00	1 / 204	21.01

Table 7-9. Conducted Power Data (NR Band n77 - C-Band – SRS-2)

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
100 MHz	π/2 BPSK	650000	3750.00	1 / 204	22.10
		656000	3840.00	1 / 68	21.84
		662000	3930.00	1 / 136	21.84
	QPSK	650000	3750.00	1 / 204	22.13
		656000	3840.00	1 / 68	22.23
		662000	3930.00	1 / 204	21.92
	16-QAM	650000	3750.00	1 / 204	20.96

Table 7-10. Conducted Power Data (NR Band n77 - C-Band – SRS-3)

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
100 MHz	π/2 BPSK	650000	3750.00	1 / 204	20.19
		656000	3840.00	1 / 68	20.41
		662000	3930.00	1 / 68	20.66
	QPSK	650000	3750.00	1 / 204	20.06
		656000	3840.00	1 / 68	20.58
		662000	3930.00	1 / 68	20.06
	16-QAM	662000	3930.00	1 / 68	19.61

Table 7-11. Conducted Power Data (NR Band n77 - C-Band – SRS-4)

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 19 of 200



EN-DC – n77 (PC2) - DoD Band + LTE

NR (SCS 30kHz)						LTE						NR	LTE	EN-DC
NR Band	NR Bandwidth [MHz]	NR Channel	NR Frequency [MHz]	Mod.	NR RB#/Offset	LTE Band	LTE Bandwidth [MHz]	LTE Channel	LTE Frequency [MHz]	Mod.	LTE RB#/Offset	Conducted Power [dBm]	Conducted Power [dBm]	Total Tx. Power [dBm]
n77	100	Mid	3500.01	QPSK	270/0	B12	10	Mid	707.5	QPSK	50/0	16.25	22.63	23.53
				QPSK	270/0					QPSK	1/25	16.06	22.64	23.50
				QPSK	1/136					QPSK	50/0	16.06	22.62	23.49
				QPSK	1/136					QPSK	1/25	16.09	22.64	23.51
				16-QAM	1/136					16-QAM	1/25	17.69	22.15	23.48

Table 7-12. Conducted Power Data (NR Band n77 – DoD Band + EN-DC Anchor B12)

NR (SCS 30kHz)						LTE						NR	LTE	EN-DC
NR Band	NR Bandwidth [MHz]	NR Channel	NR Frequency [MHz]	Mod.	NR RB#/Offset	LTE Band	LTE Bandwidth [MHz]	LTE Channel	LTE Frequency [MHz]	Mod.	LTE RB#/Offset	Conducted Power [dBm]	Conducted Power [dBm]	Total Tx. Power [dBm]
n77	100	Mid	3500.01	QPSK	270/0	B2 ANTA	20	Mid	1880	QPSK	100/0	17.91	21.79	23.28
				QPSK	270/0					QPSK	1/50	16.34	22.23	23.23
				QPSK	1/136					QPSK	100/0	17.72	21.83	23.25
				QPSK	1/136					QPSK	1/50	16.21	22.19	23.17
				16-QAM	270/0					16-QAM	100/0	19.70	20.76	23.27

Table 7-13. Conducted Power Data (NR Band n77 – DoD Band + EN-DC Anchor B2)

NR (SCS 30kHz)						LTE						NR	LTE	EN-DC
NR Band	NR Bandwidth [MHz]	NR Channel	NR Frequency [MHz]	Mod.	NR RB#/Offset	LTE Band	LTE Bandwidth [MHz]	LTE Channel	LTE Frequency [MHz]	Mod.	LTE RB#/Offset	Conducted Power [dBm]	Conducted Power [dBm]	Total Tx. Power [dBm]
n77	100	Mid	3500.01	QPSK	270/0	B30 ANTA	10	Mid	2310	QPSK	50/0	19.85	20.79	23.36
				QPSK	270/0					QPSK	1/25	18.00	21.82	23.33
				QPSK	1/136					QPSK	50/0	19.67	20.71	23.23
				QPSK	1/136					QPSK	1/25	17.76	21.87	23.29
				16-QAM	270/0					16-QAM	50/0	20.79	19.76	23.32

Table 7-14. Conducted Power Data (NR Band n77 – DoD Band + EN-DC Anchor B30)

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 20 of 200



EN-DC – n77 (PC2) - C-Band + LTE

NR (SCS 30kHz)						LTE						NR	LTE	EN-DC
NR Band	NR Bandwidth [MHz]	NR Channel	NR Frequency [MHz]	Mod.	NR RB#/Offset	LTE Band	LTE Bandwidth [MHz]	LTE Channel	LTE Frequency [MHz]	Mod.	LTE RB#/Offset	Conducted Power [dBm]	Conducted Power [dBm]	Total Tx. Power [dBm]
n77	100	Mid	3840.00	QPSK	270/0	B12	10	Mid	707.5	QPSK	50/0	16.13	22.58	23.47
				QPSK	270/0					QPSK	1/25	16.10	22.67	23.53
				QPSK	1/136					QPSK	50/0	16.05	22.62	23.48
				QPSK	1/136					QPSK	1/25	16.05	22.84	23.67
				16-QAM	1/136					16Q	1/25	15.80	22.86	23.64

Table 7-15. Conducted Power Data (NR Band n77 - C-Band + EN-DC Anchor B5)

NR (SCS 30kHz)						LTE						NR	LTE	EN-DC
NR Band	NR Bandwidth [MHz]	NR Channel	NR Frequency [MHz]	Mod.	NR RB#/Offset	LTE Band	LTE Bandwidth [MHz]	LTE Channel	LTE Frequency [MHz]	Mod.	LTE RB#/Offset	Conducted Power [dBm]	Conducted Power [dBm]	Total Tx. Power [dBm]
n77	100	Mid	3840.00	QPSK	270/0	B2 ANTA	20	Mid	1880	QPSK	100/0	17.59	21.72	23.14
				QPSK	270/0					QPSK	1/50	16.10	22.18	23.14
				QPSK	1/136					QPSK	100/0	17.66	21.73	23.17
				QPSK	1/136					QPSK	1/50	16.13	22.15	23.12
				16-QAM	1/136					16-QAM	100/0	19.34	20.81	23.15

Table 7-16. Conducted Power Data (NR Band n77 - C-Band + EN-DC Anchor B2)

NR (SCS 30kHz)						LTE						NR	LTE	EN-DC
NR Band	NR Bandwidth [MHz]	NR Channel	NR Frequency [MHz]	Mod.	NR RB#/Offset	LTE Band	LTE Bandwidth [MHz]	LTE Channel	LTE Frequency [MHz]	Mod.	LTE RB#/Offset	Conducted Power [dBm]	Conducted Power [dBm]	Total Tx. Power [dBm]
n77	100	Mid	3840.00	QPSK	270/0	B30 ANTA	10	Mid	2310	QPSK	50/0	19.61	20.72	23.21
				QPSK	270/0					QPSK	1/25	17.82	21.82	23.28
				QPSK	1/136					QPSK	50/0	19.63	20.70	23.21
				QPSK	1/136					QPSK	1/25	17.92	21.88	23.35
				16-QAM	1/136					16-QAM	1/25	19.47	21.04	23.34

Table 7-17. Conducted Power Data (NR Band n77 - C-Band + EN-DC Anchor B30)

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 21 of 200

7.3 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 – Section 5.4.4

Test Settings

1. The signal analyzer’s automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

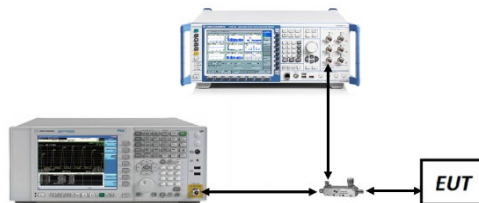




Figure 7-2. Test Instrument & Measurement Setup

Test Notes


- 1) Occupied Bandwidth was only measured on the antenna (SRS-1) with the highest power for each band.
- 2) Only the worst case data for each Modulation/Channel Bandwidth combination is displayed in the following plots.

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 22 of 200


NR Band n77 (PC2) - DoD Band

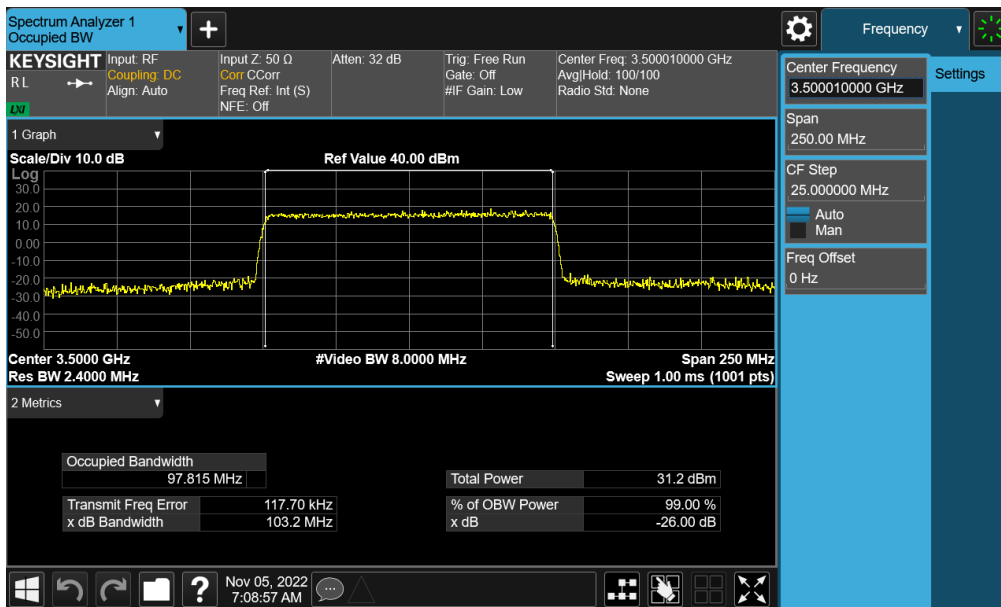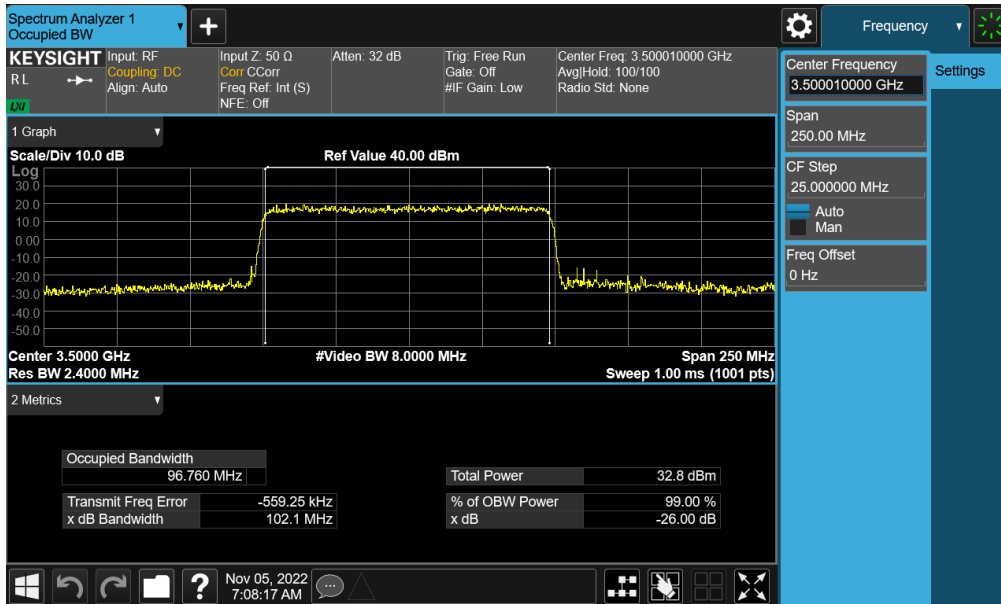

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 23 of 200

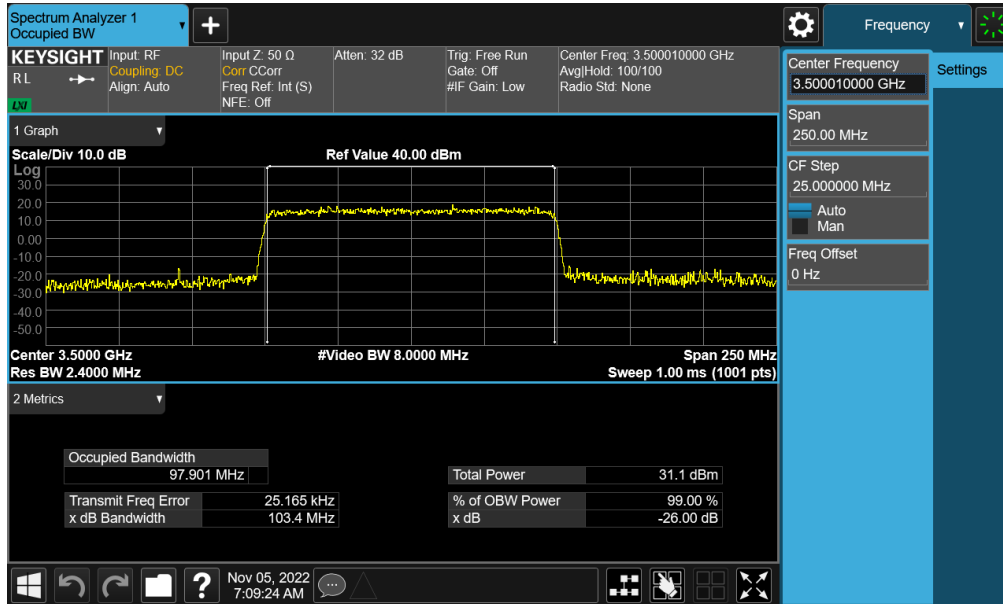


Plot 7-3. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 100MHz – 16-QAM - Full RB)

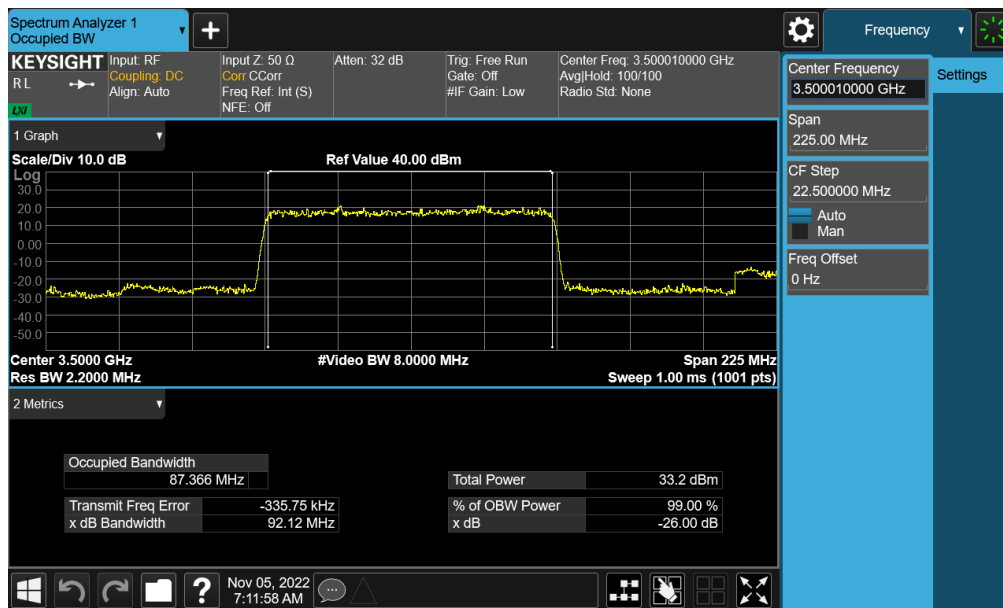


Plot 7-4. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 90MHz – $\pi/2$ BPSK - Full RB)

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 24 of 200

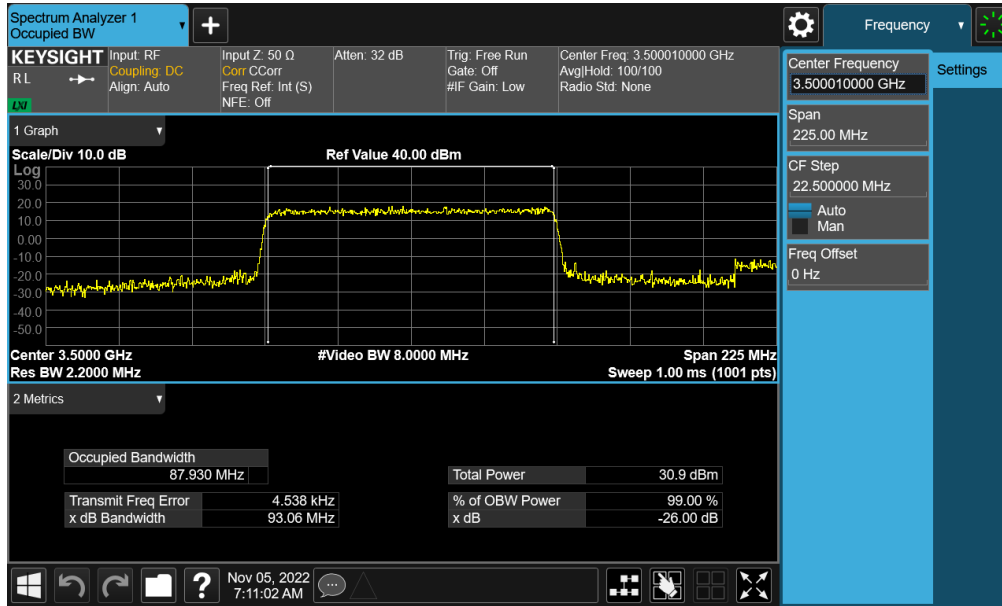


Plot 7-5. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 90MHz – QPSK - Full RB)

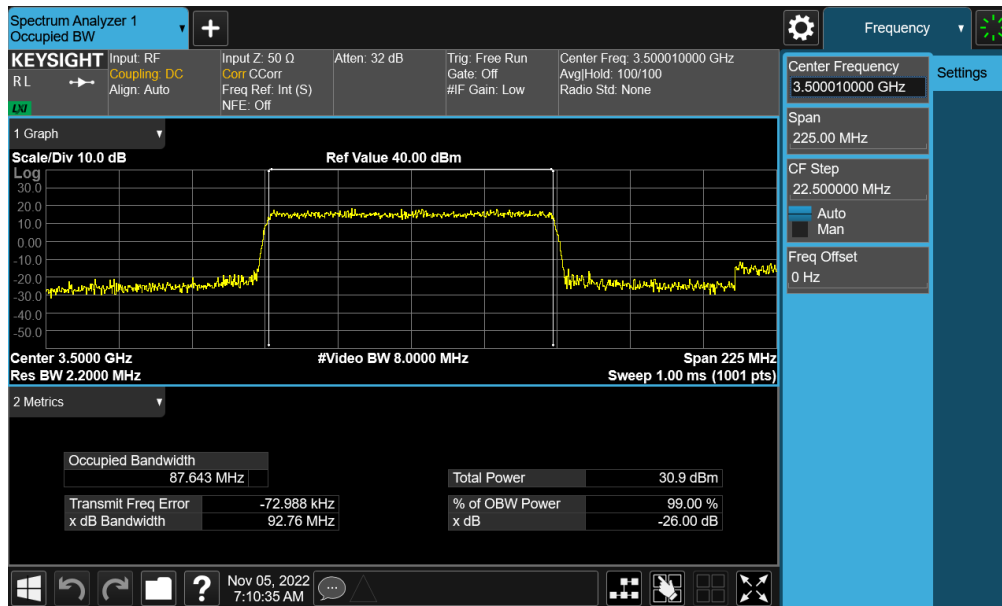


Plot 7-6. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 90MHz – 16-QAM - Full RB)

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 25 of 200


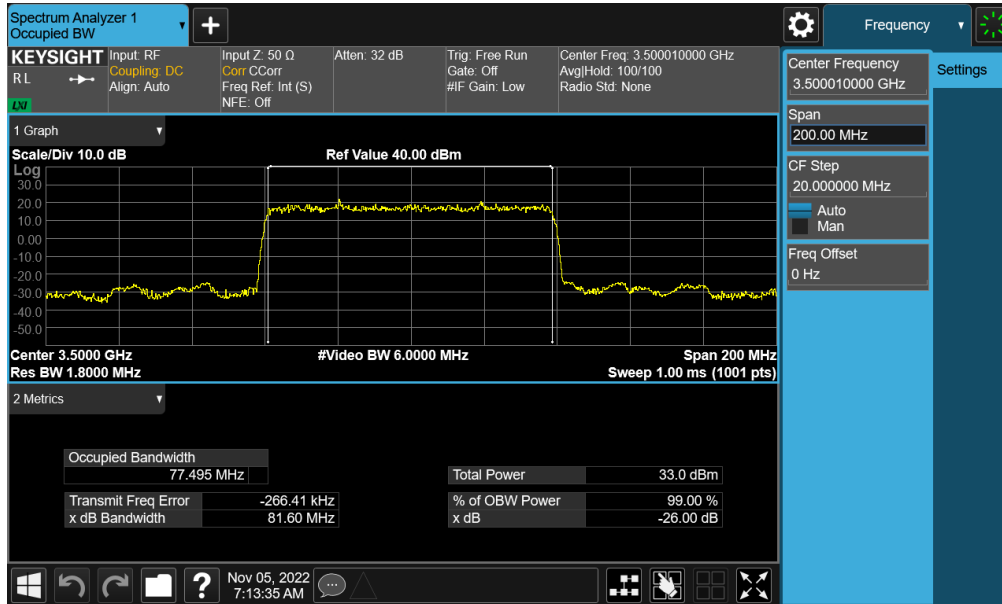


Plot 7-7. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 80MHz – $\pi/2$ BPSK - Full RB)

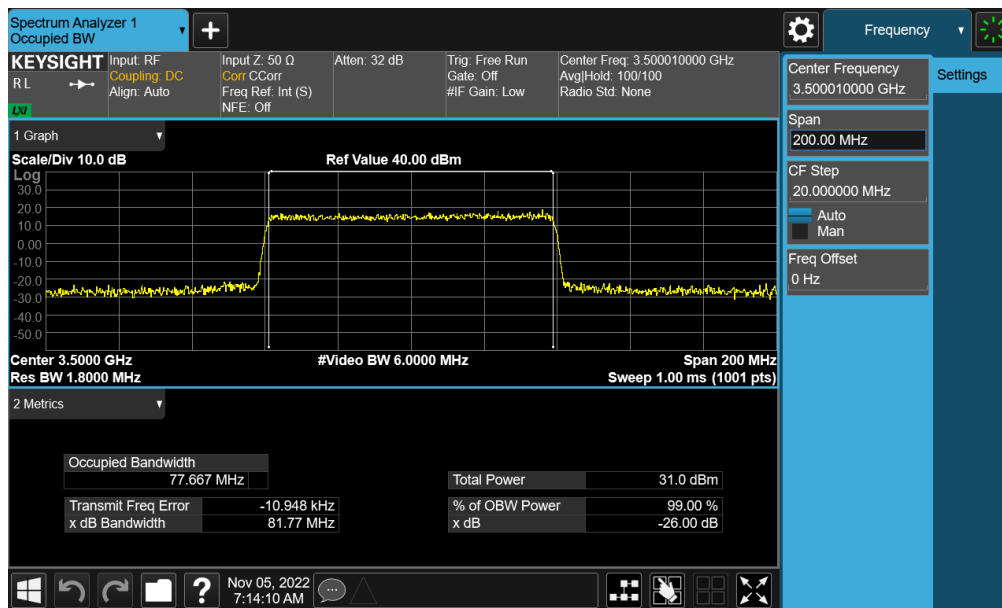


Plot 7-8. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 80MHz – QPSK - Full RB)


FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 26 of 200

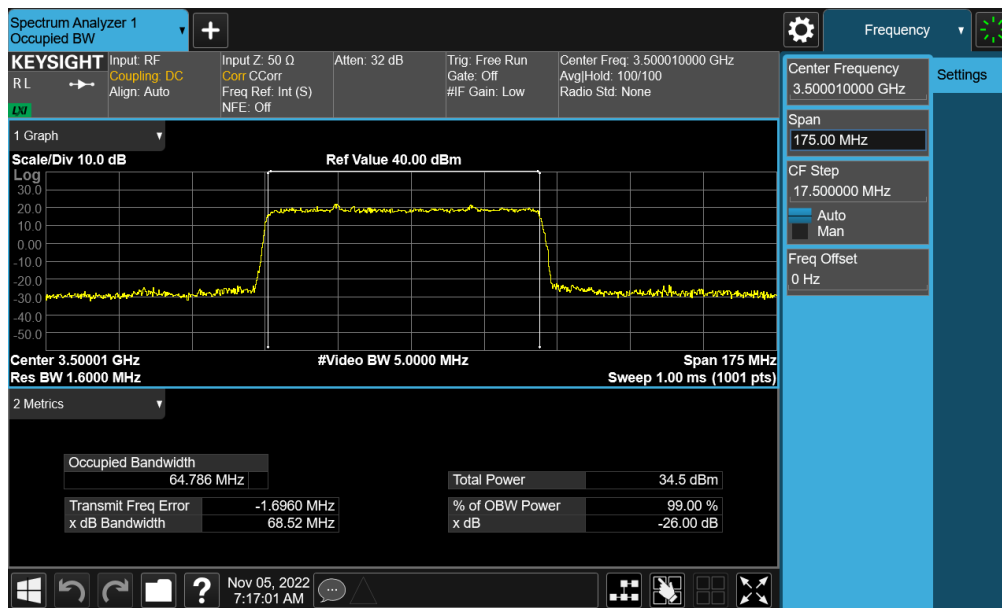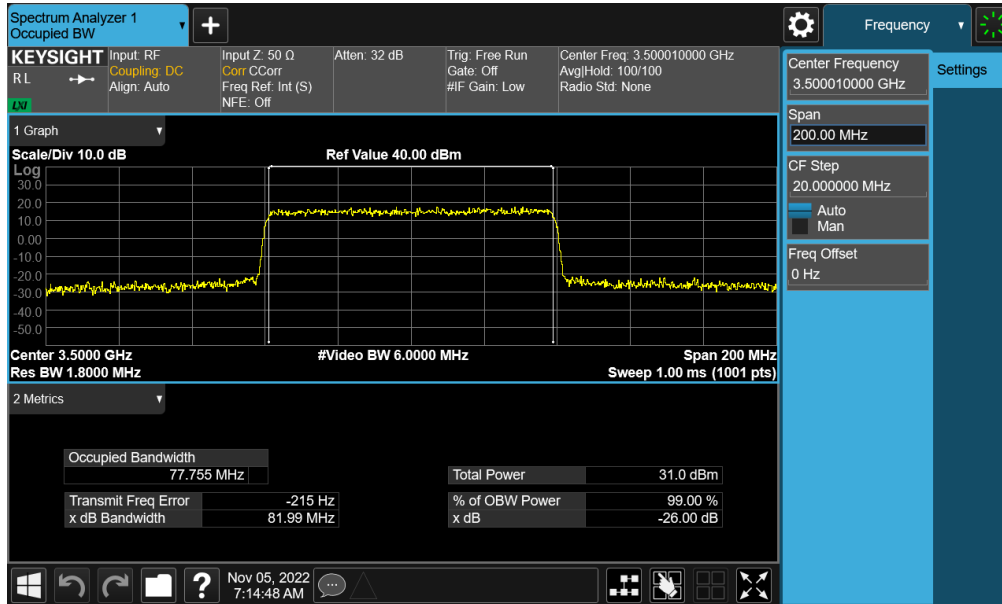

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 27 of 200


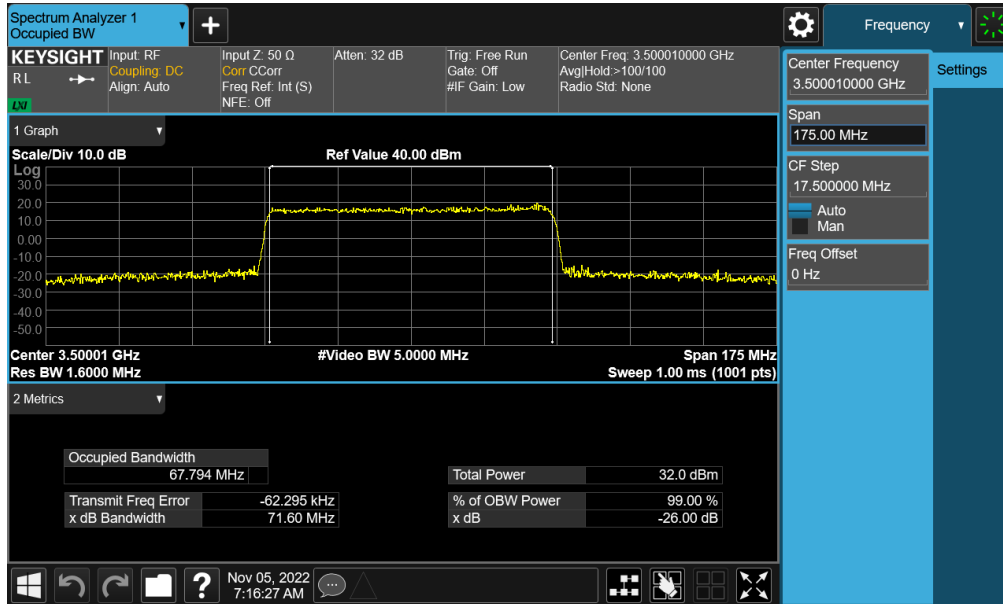


Plot 7-11. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 70MHz – QPSK - Full RB)

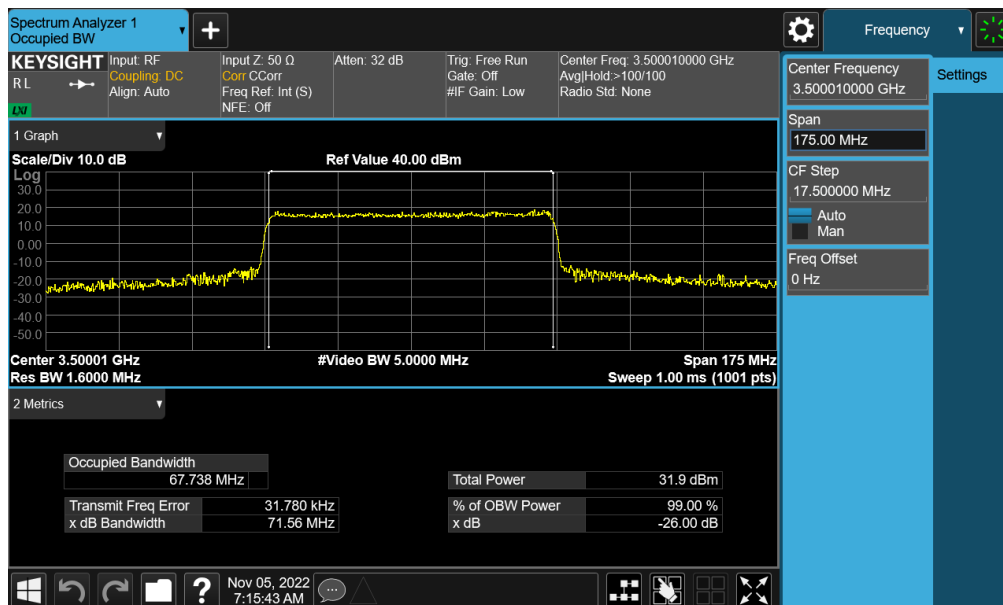


Plot 7-12. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 70MHz – 16-QAM - Full RB)


FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 28 of 200

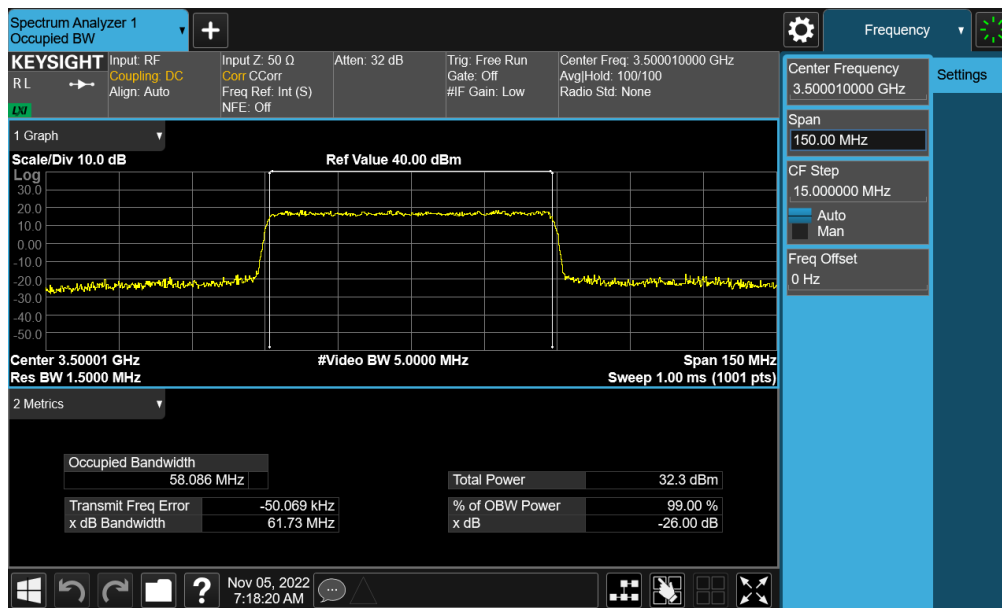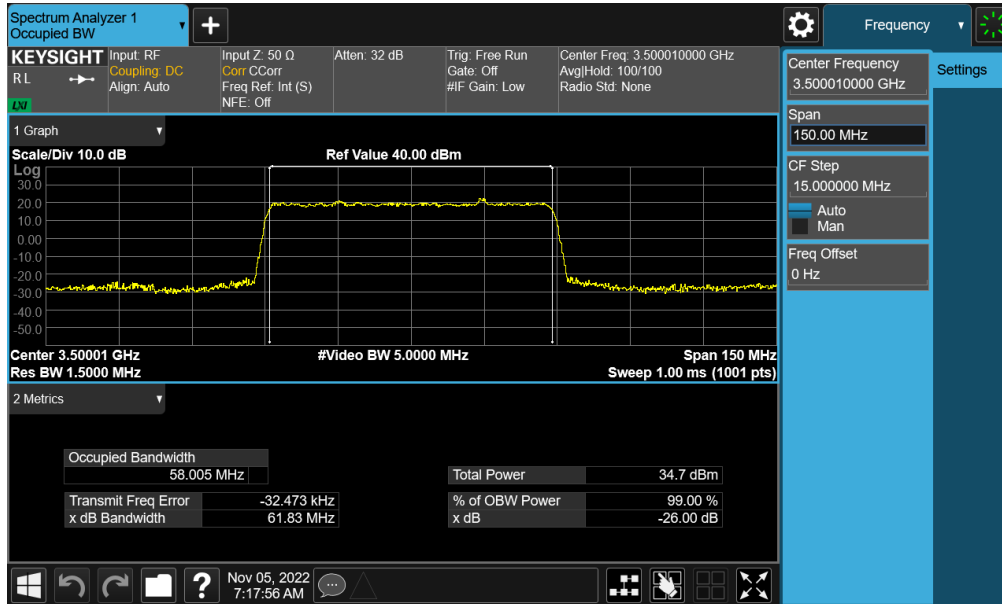

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 29 of 200

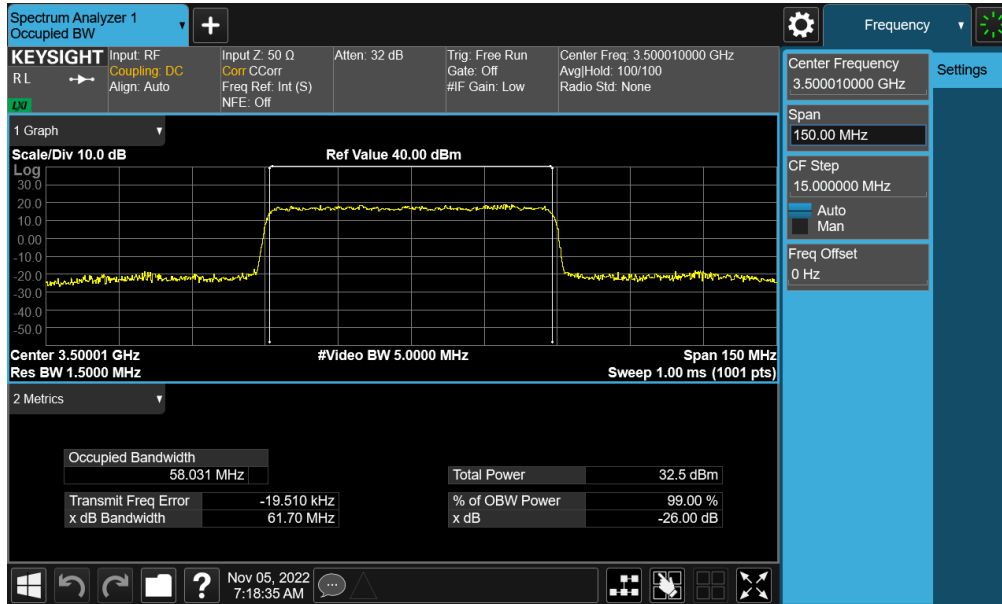


Plot 7-15. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 60MHz – 16-QAM - Full RB)

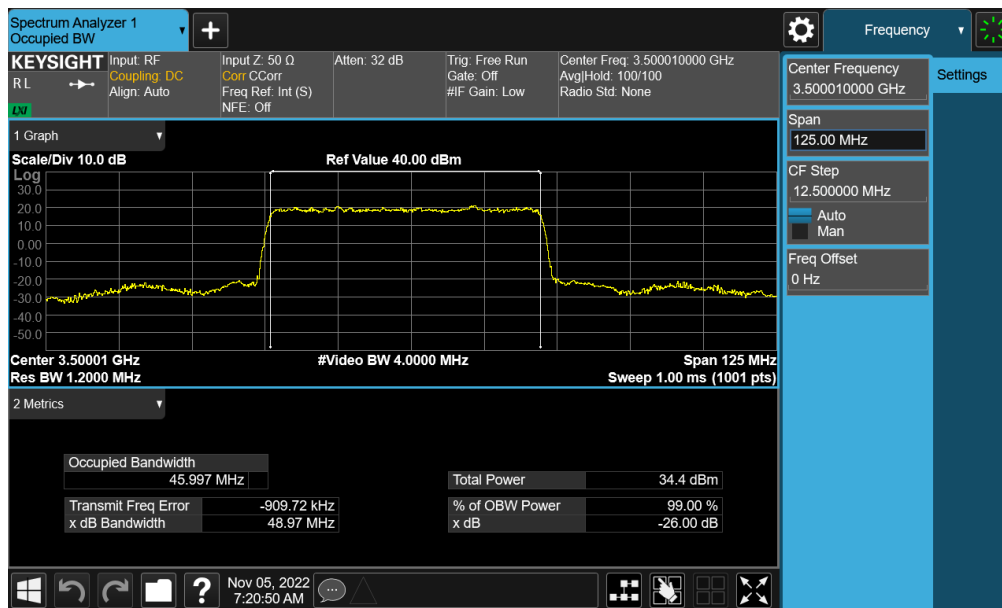


Plot 7-16. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 50MHz – $\pi/2$ BPSK - Full RB)

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 30 of 200


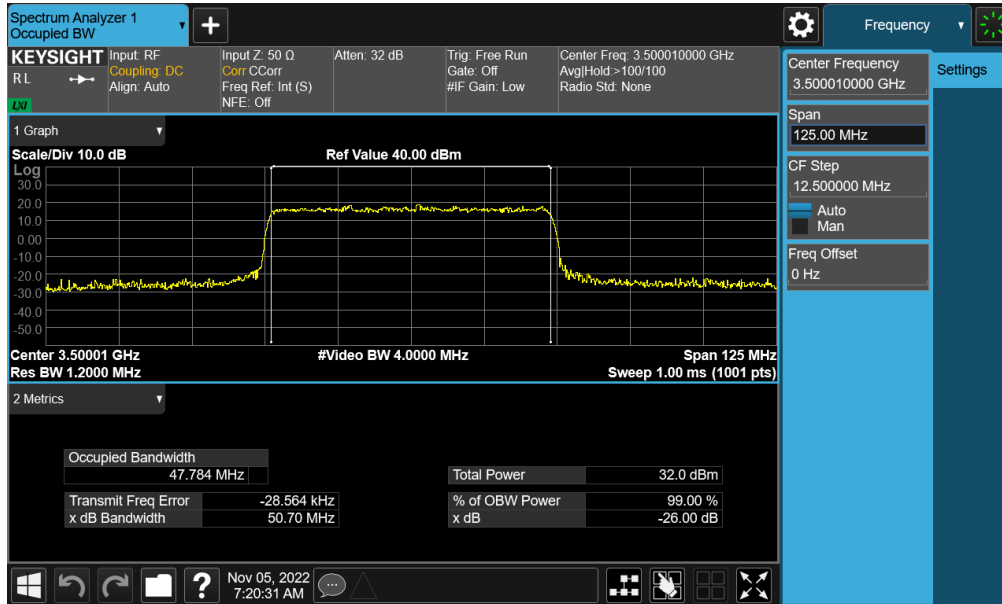


Plot 7-17. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 50MHz – QPSK - Full RB)

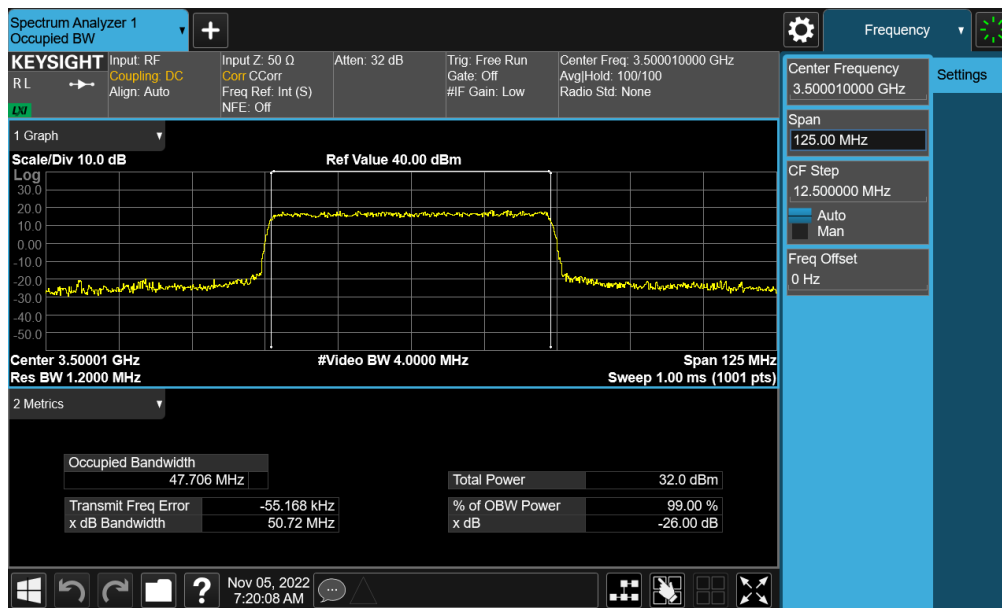


Plot 7-18. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 50MHz – 16-QAM - Full RB)


FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 31 of 200

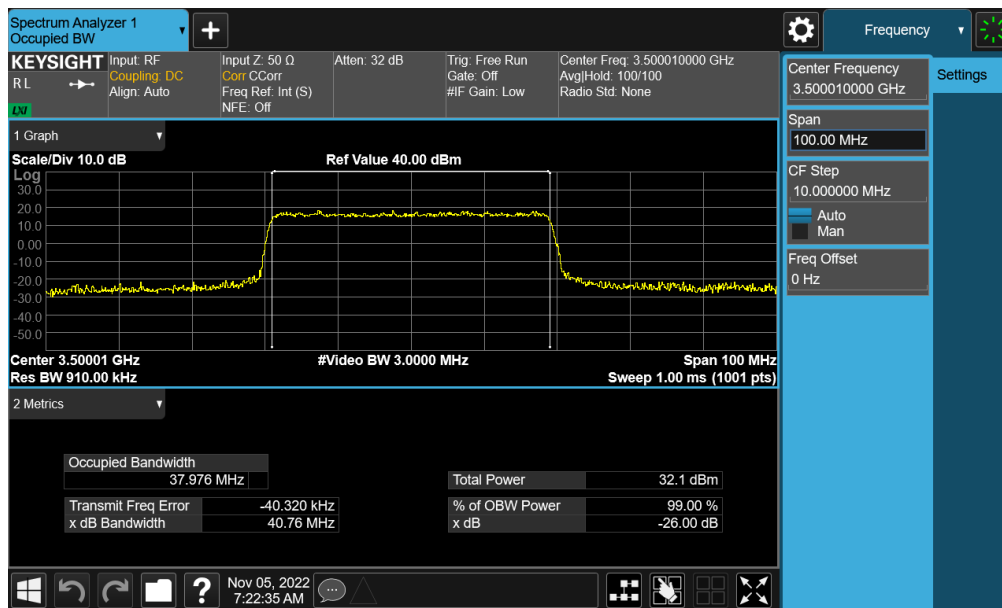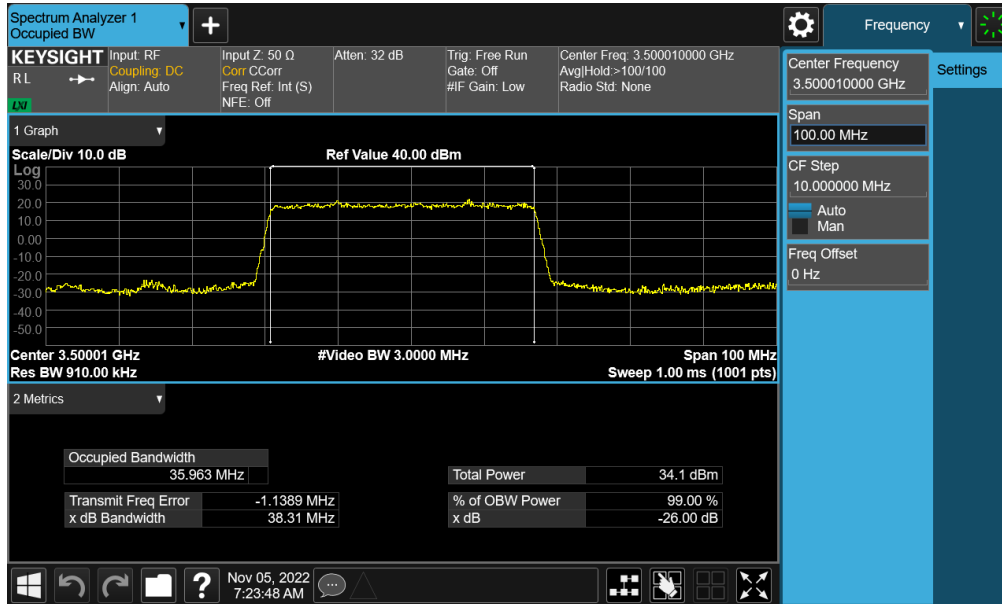

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 32 of 200

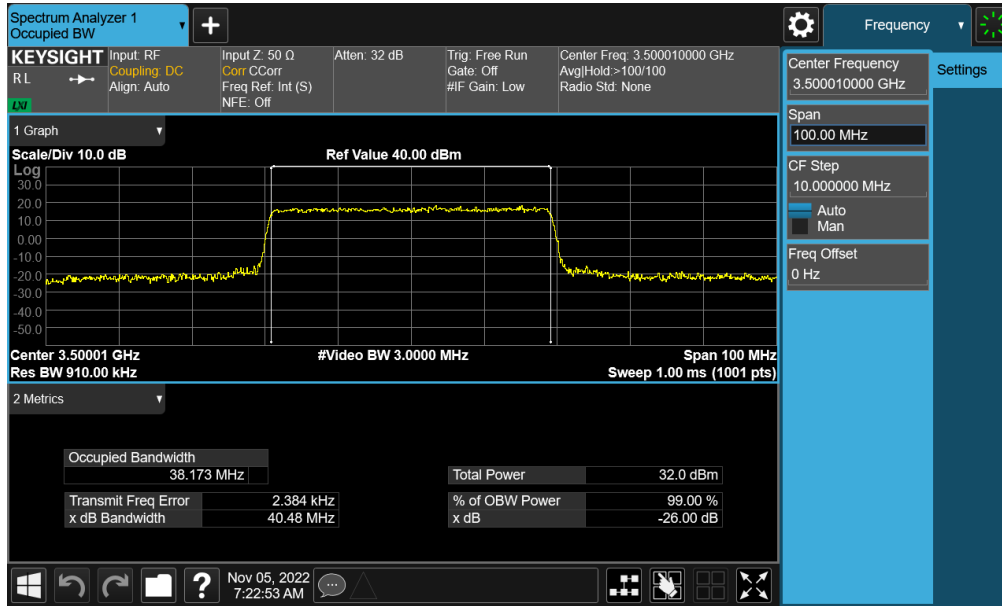


Plot 7-21. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 40MHz – 16-QAM - Full RB)

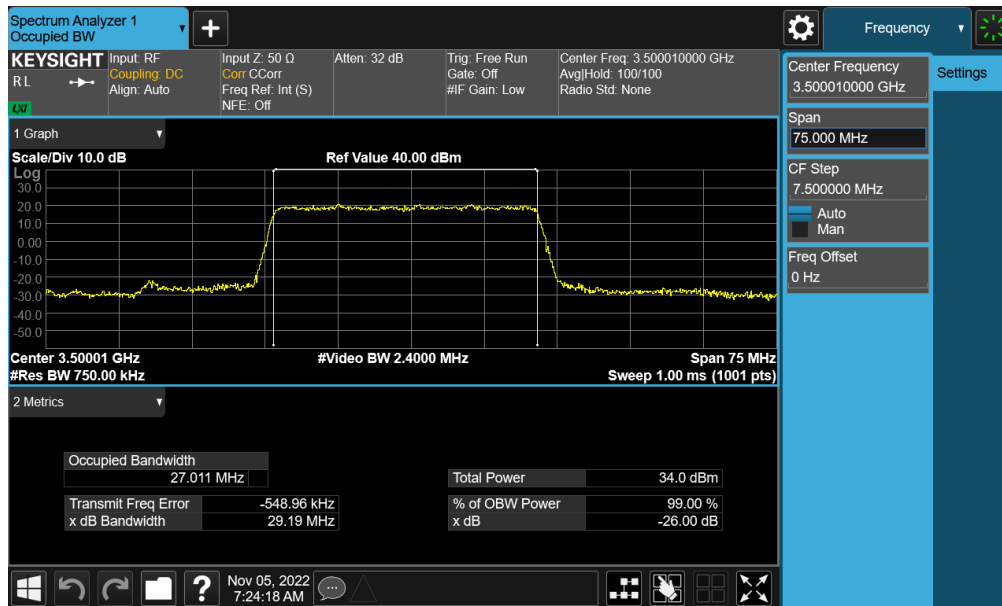


Plot 7-22. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 30MHz – $\pi/2$ BPSK - Full RB)

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 33 of 200

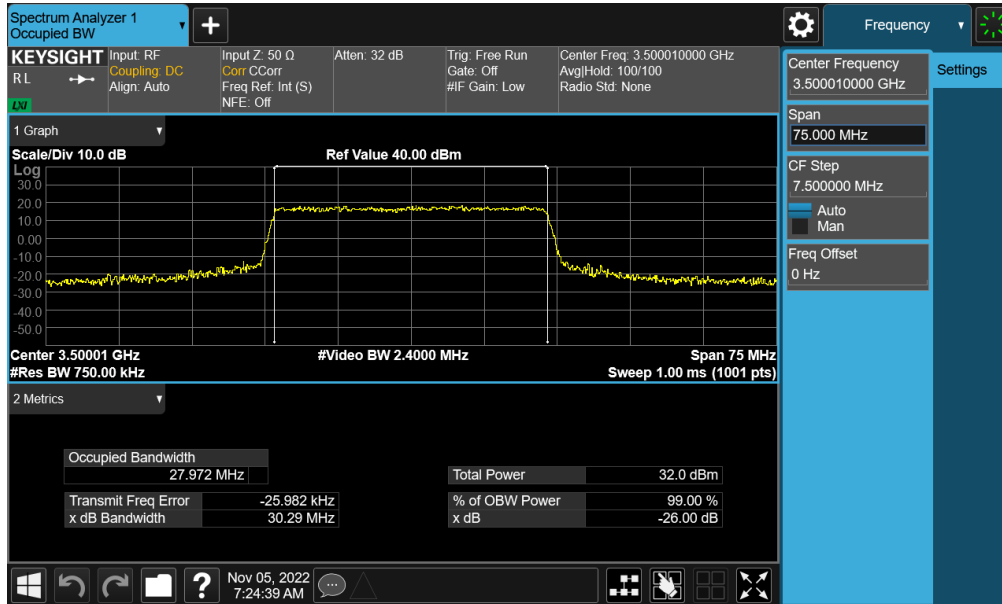


Plot 7-23. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 30MHz – QPSK - Full RB)

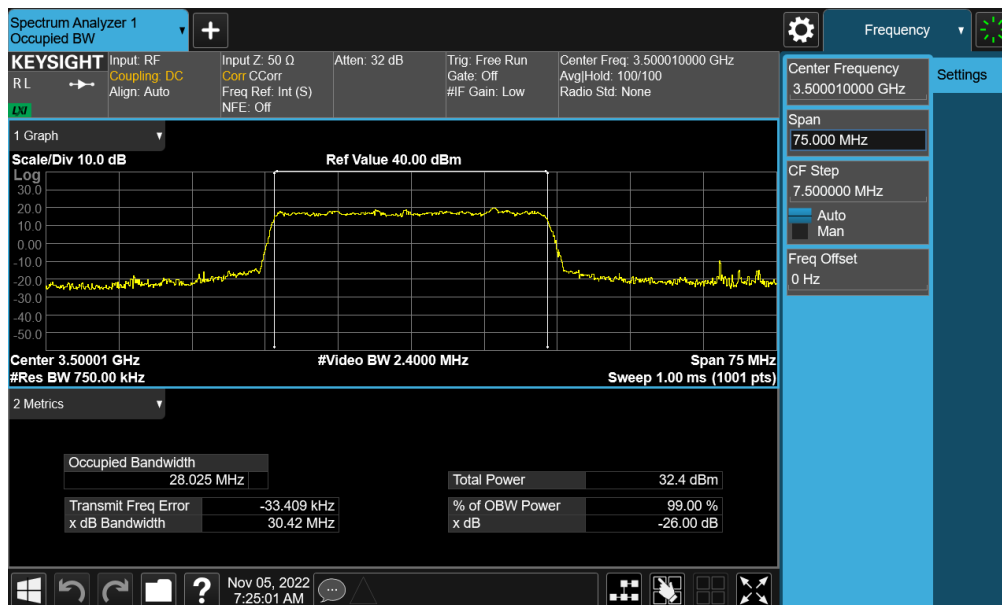


Plot 7-24. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 30MHz – 16-QAM - Full RB)

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 34 of 200


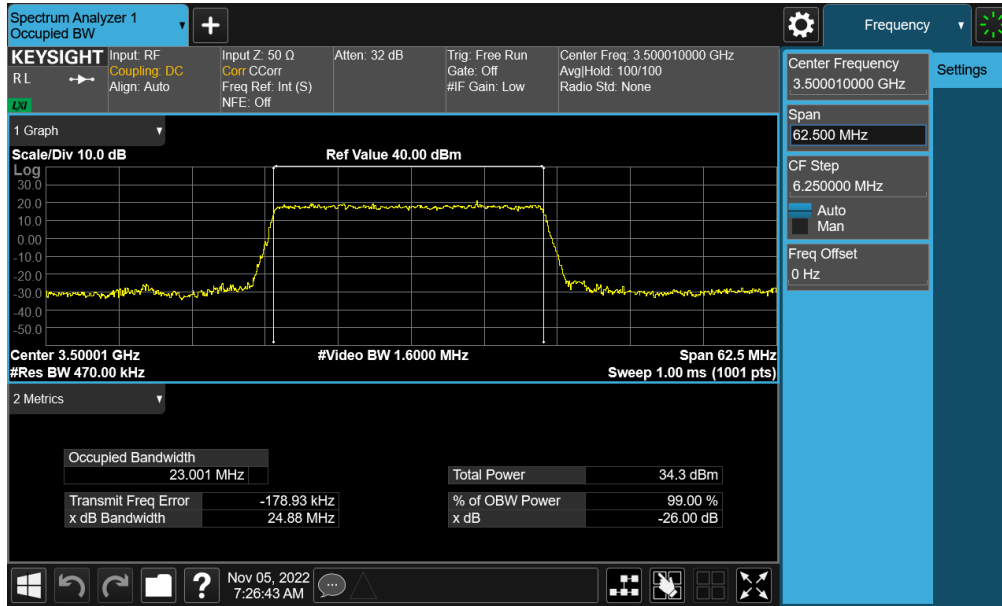


Plot 7-25. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 25MHz – $\pi/2$ BPSK - Full RB)

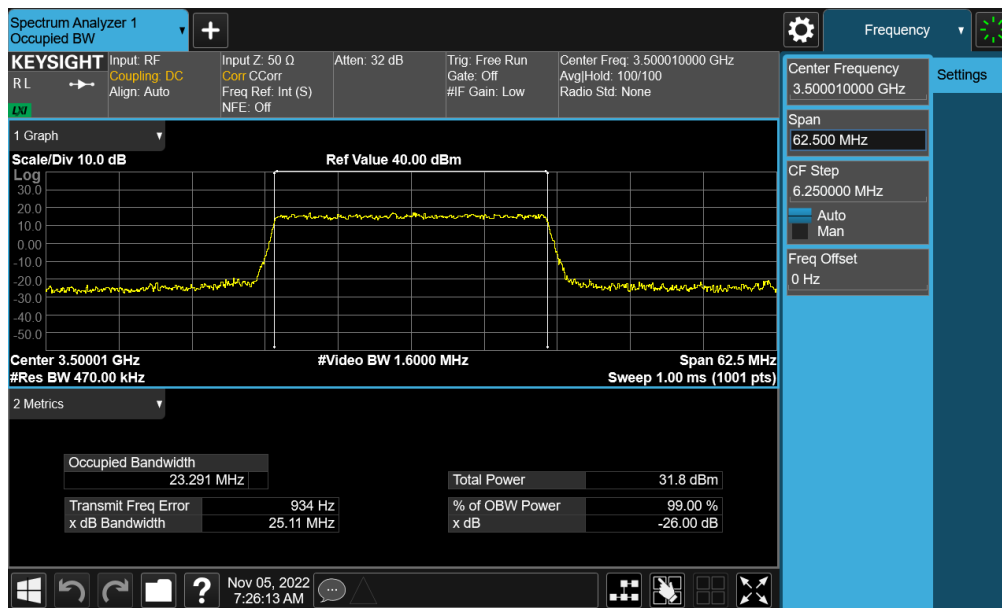


Plot 7-26. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 25MHz – QPSK - Full RB)


FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 35 of 200

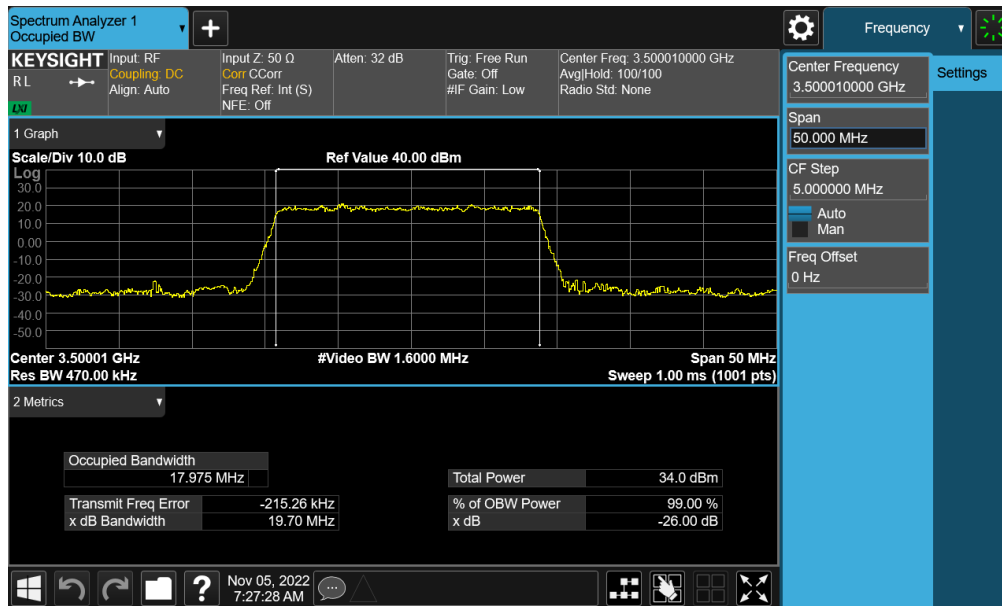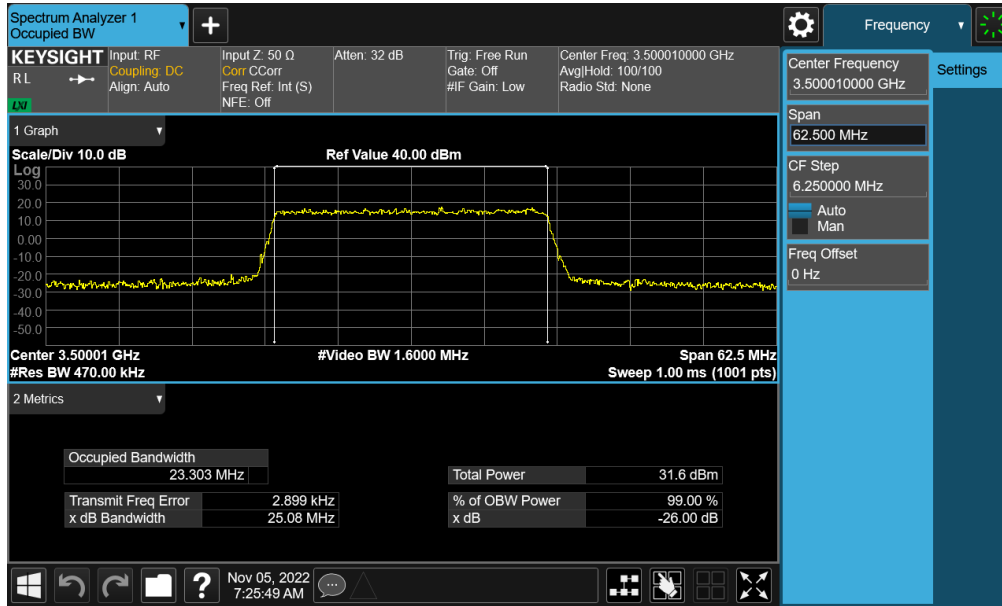

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 36 of 200

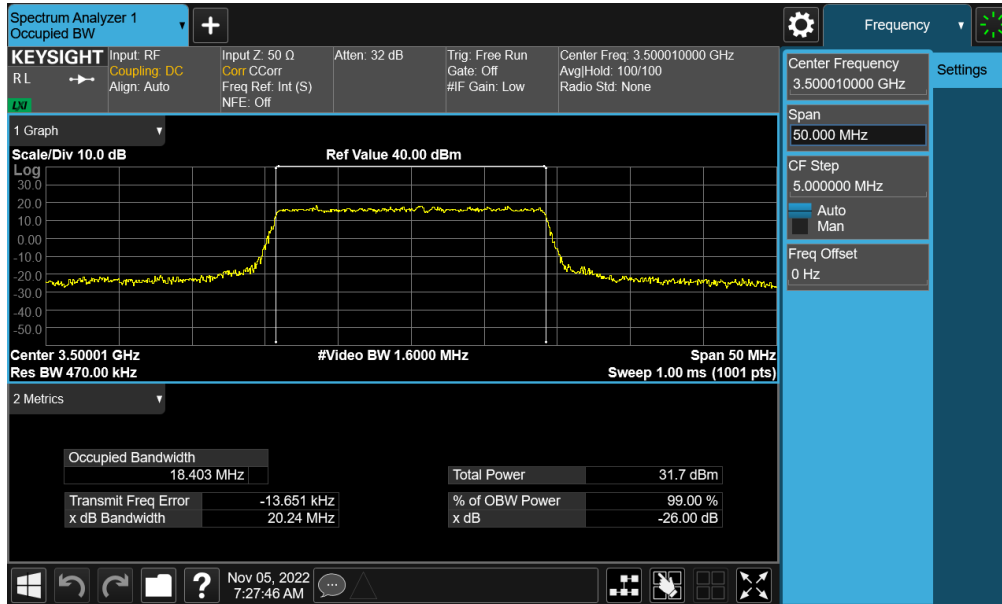


Plot 7-29. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 20MHz – QPSK - Full RB)

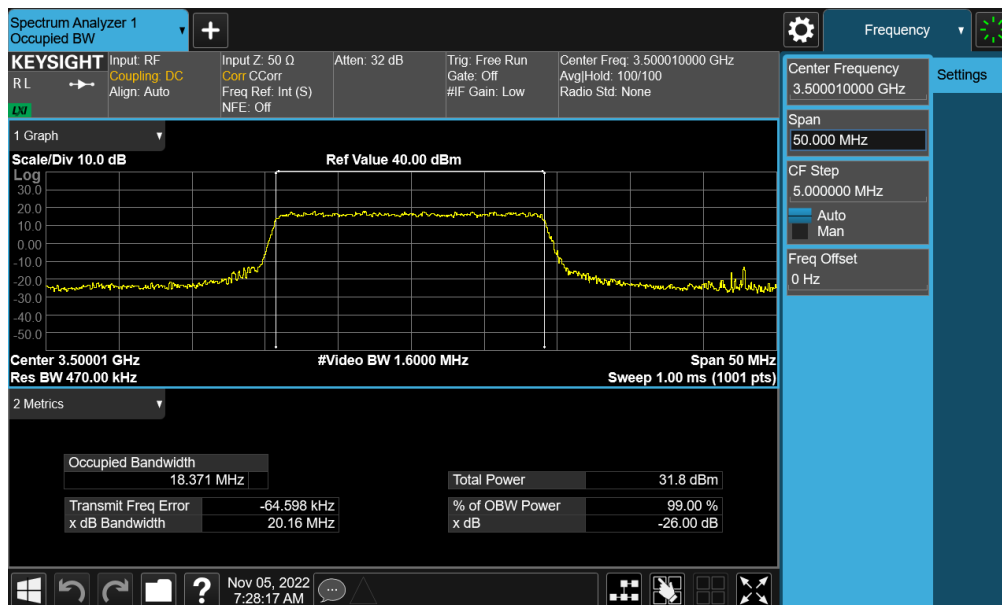


Plot 7-30. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 20MHz – 16-QAM - Full RB)

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 37 of 200

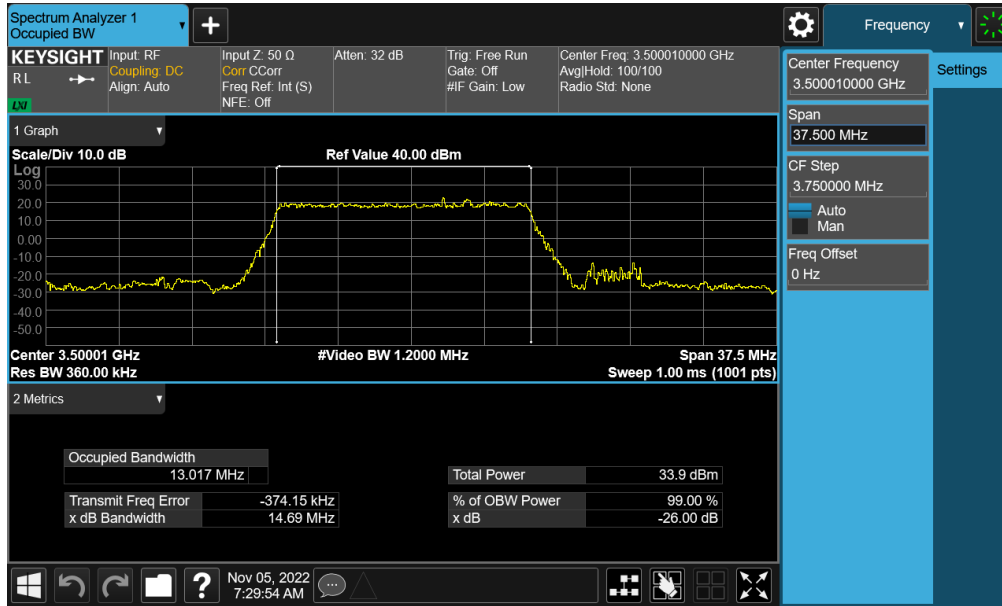


Plot 7-31. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 15MHz – $\pi/2$ BPSK - Full RB)

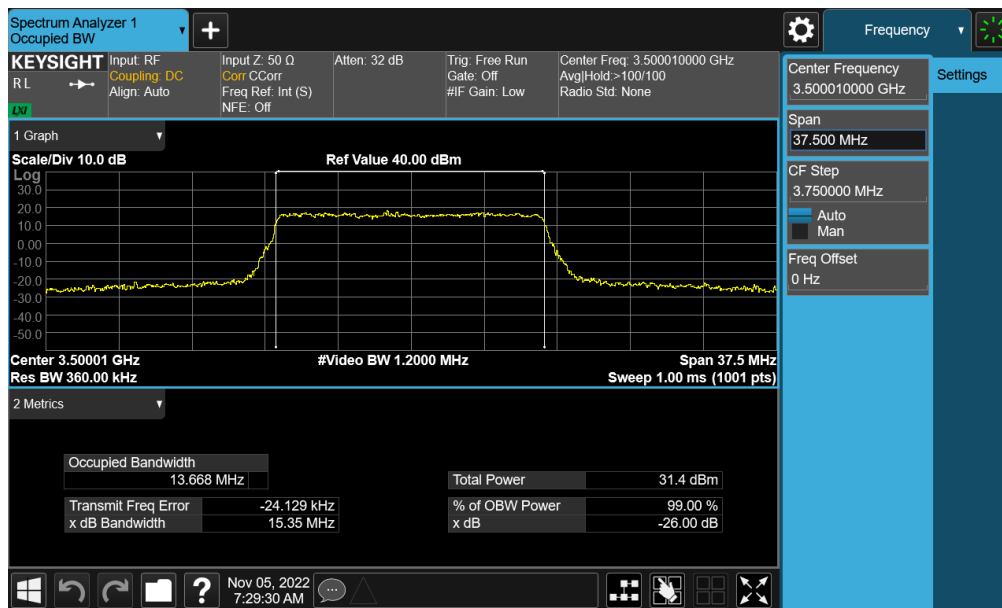


Plot 7-32. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 15MHz – QPSK - Full RB)

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 38 of 200


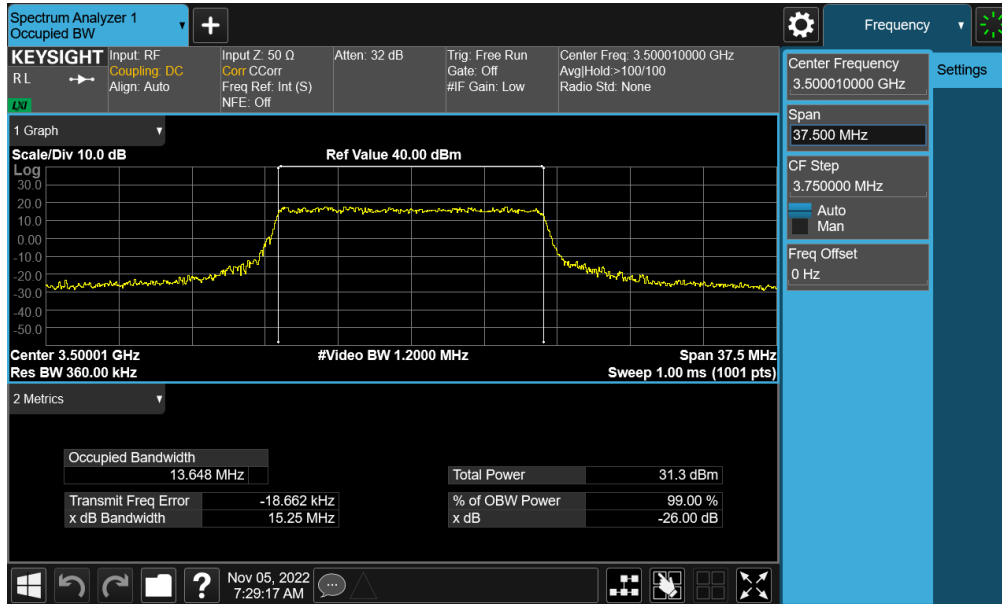


Plot 7-33. Occupied Bandwidth Plot (NR Band n77 - DoD Band - 15MHz - 16-QAM - Full RB)

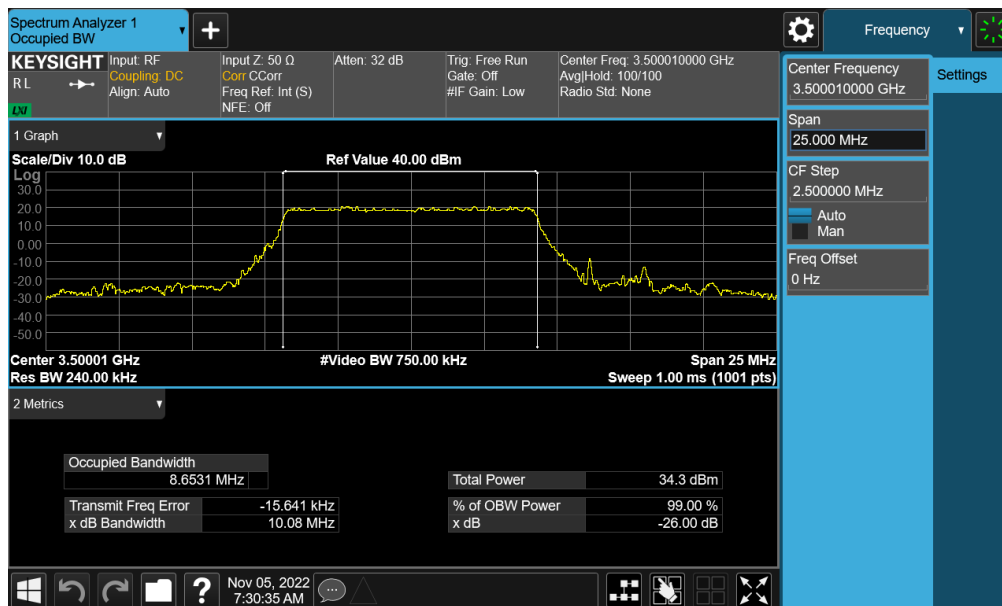


Plot 7-34. Occupied Bandwidth Plot (NR Band n77 - DoD Band - 10MHz - $\pi/2$ BPSK - Full RB)

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 39 of 200

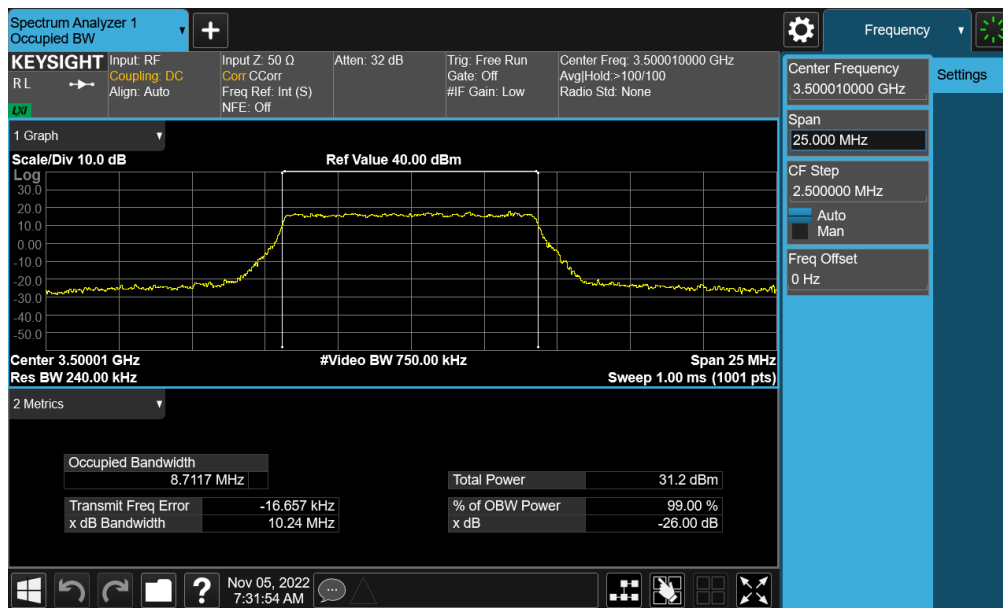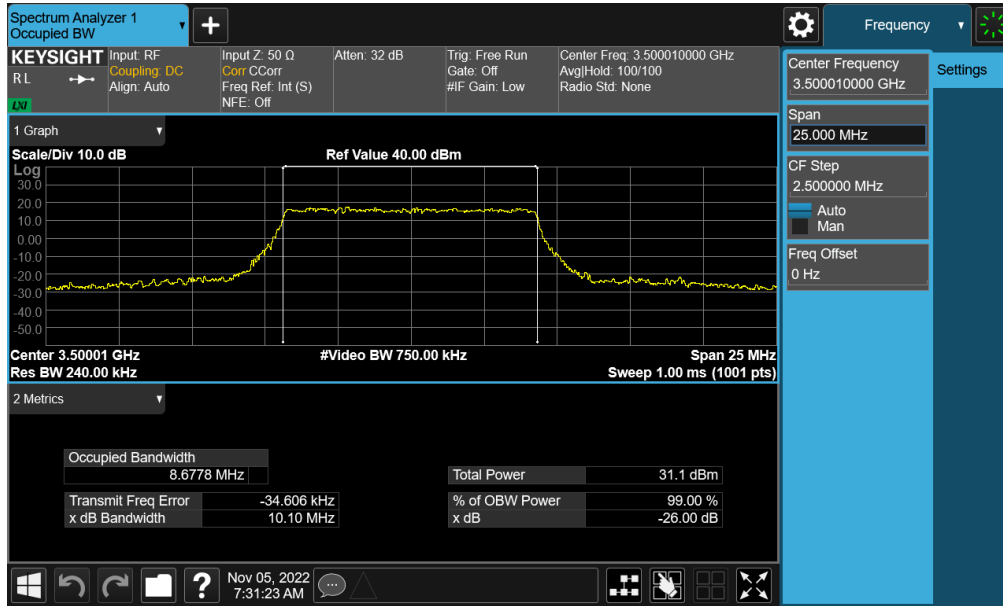


FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 40 of 200

NR Band n77 (PC2) - C-Band

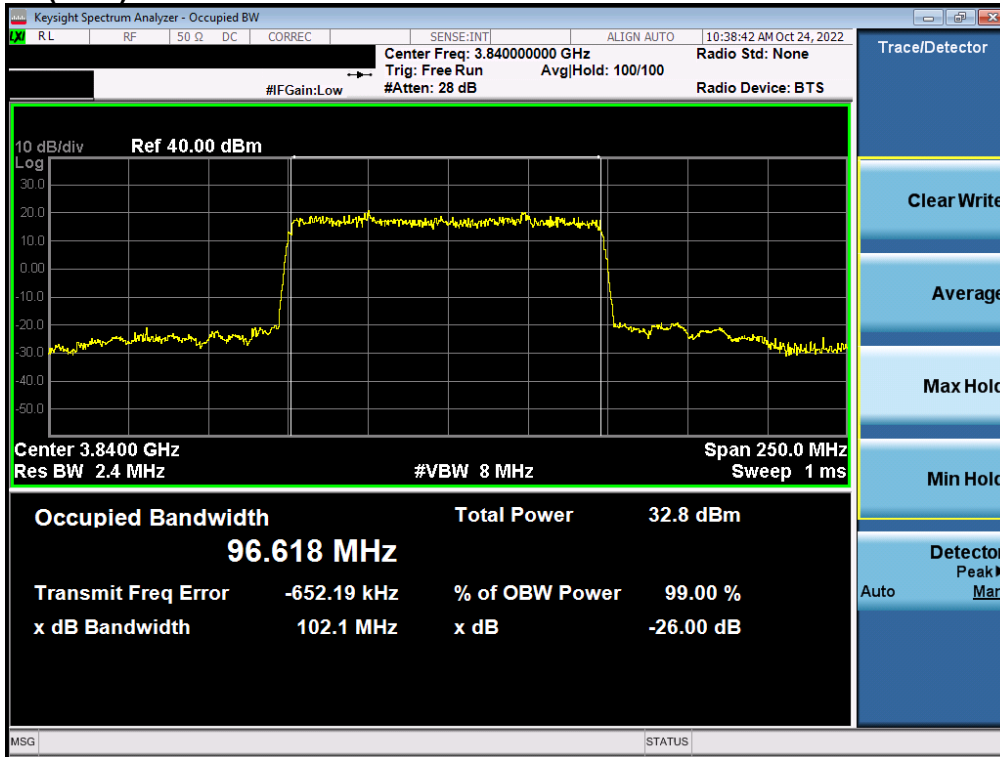


Plot 7-37. Occupied Bandwidth Plot (NR Band n77 - C-Band – 100MHz – $\pi/2$ BPSK - Full RB)

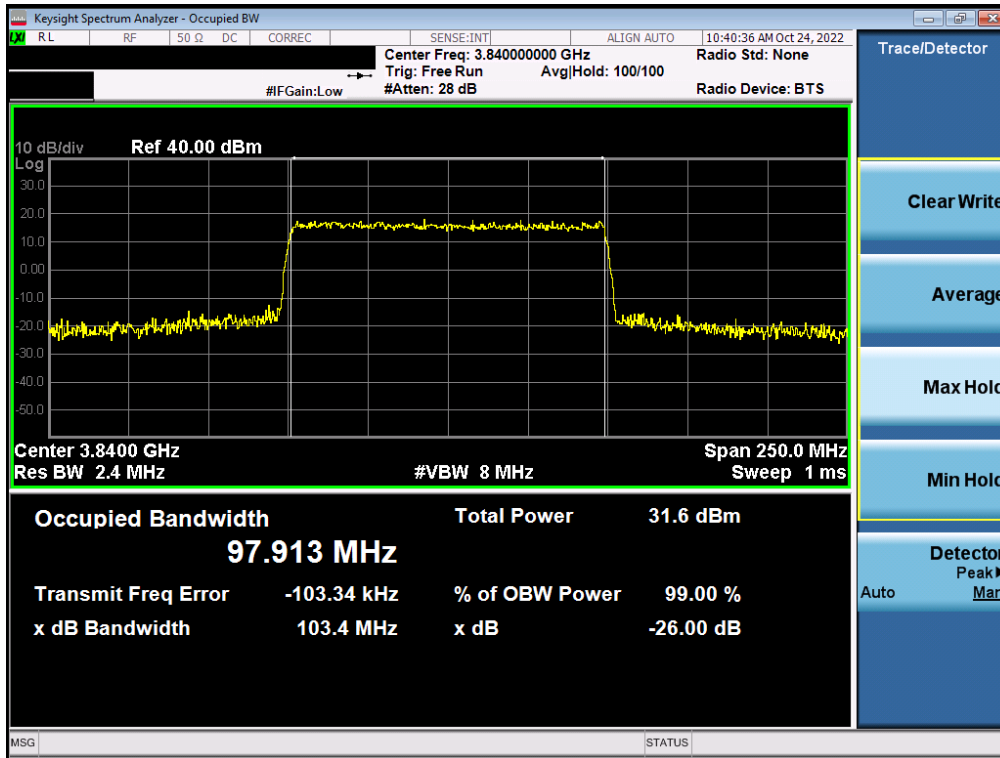


Plot 7-38. Occupied Bandwidth Plot (NR Band n77 - C-Band – 100MHz – QPSK - Full RB)

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 41 of 200

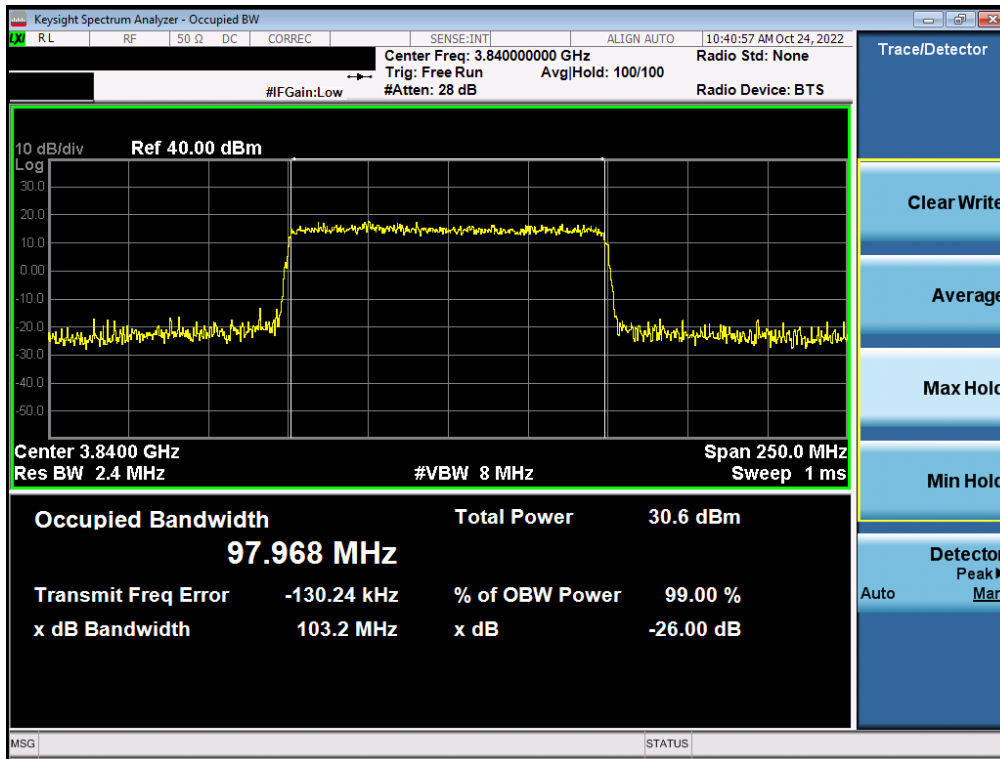


Plot 7-39. Occupied Bandwidth Plot (NR Band n77 - C-Band – 100MHz – 16-QAM - Full RB)

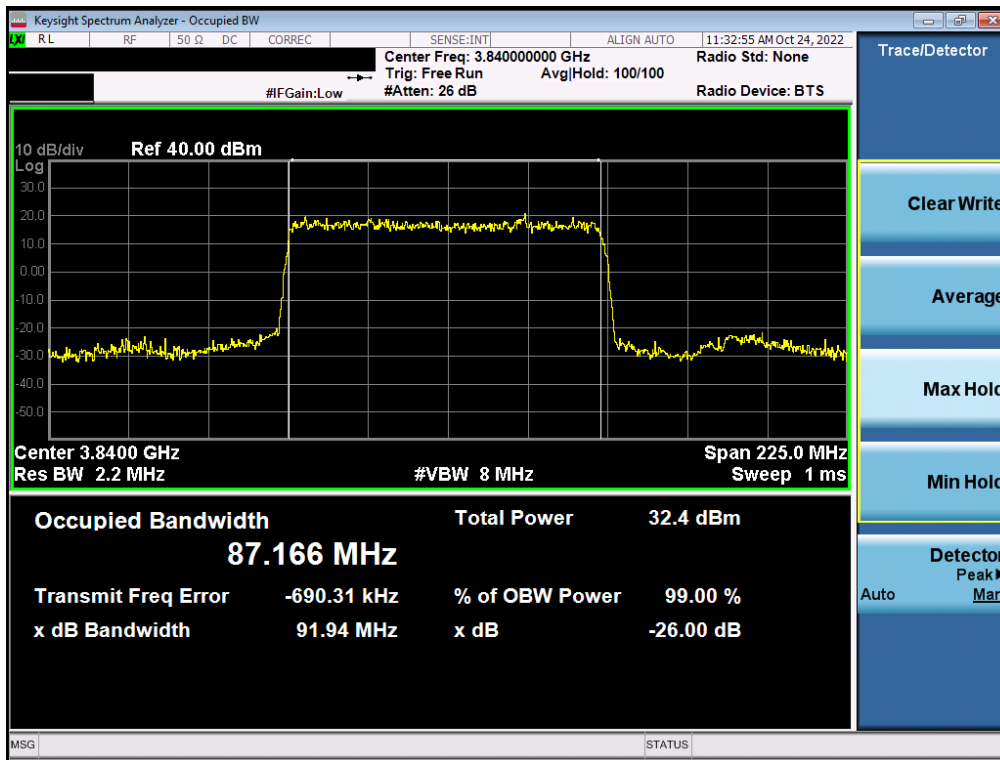


Plot 7-40. Occupied Bandwidth Plot (NR Band n77 - C-Band – 90MHz – $\pi/2$ BPSK - Full RB)

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 42 of 200

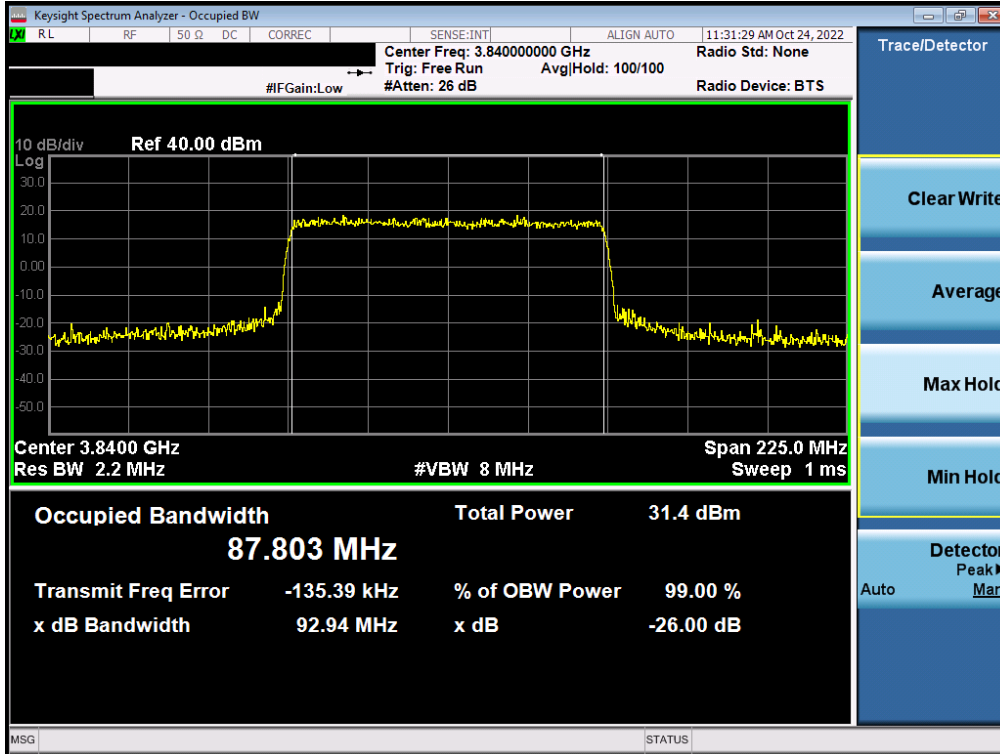


Plot 7-41. Occupied Bandwidth Plot (NR Band n77 - C-Band – 90MHz – QPSK - Full RB)

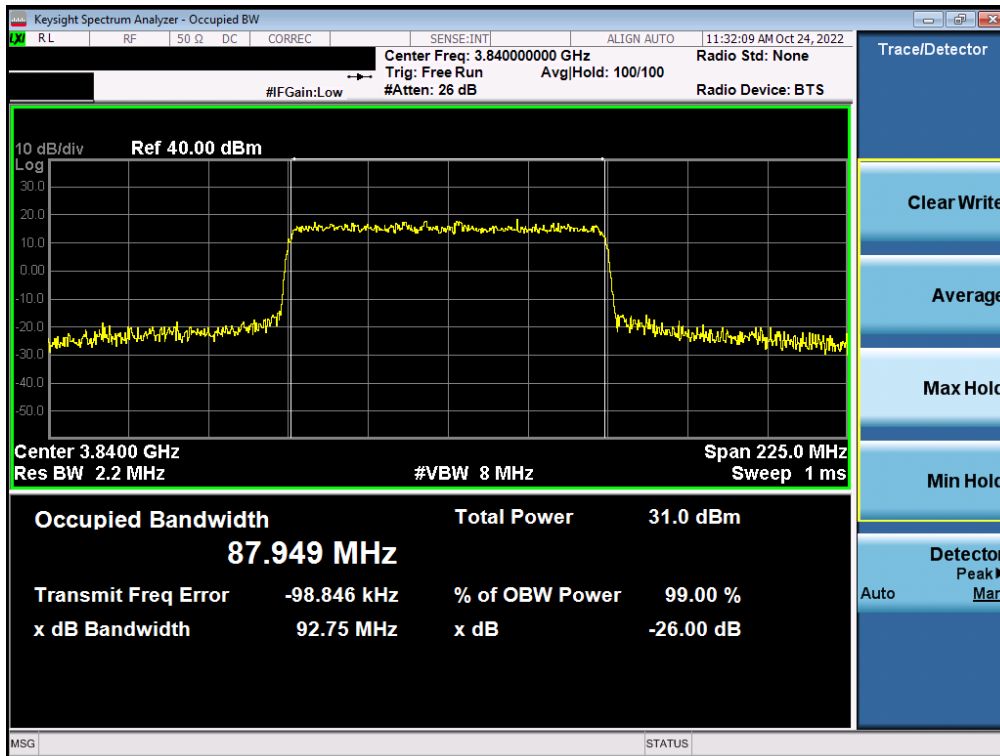


Plot 7-42. Occupied Bandwidth Plot (NR Band n77 - C-Band – 90MHz – 16-QAM - Full RB)

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 43 of 200

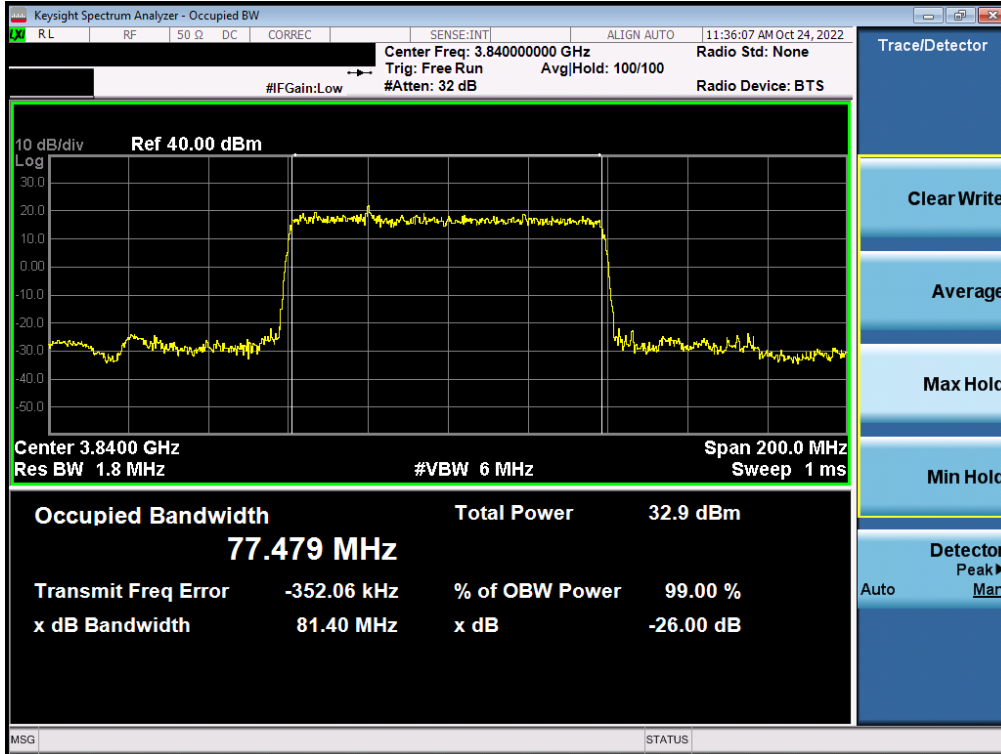


Plot 7-43. Occupied Bandwidth Plot (NR Band n77 - C-Band – 80MHz – $\pi/2$ BPSK - Full RB)

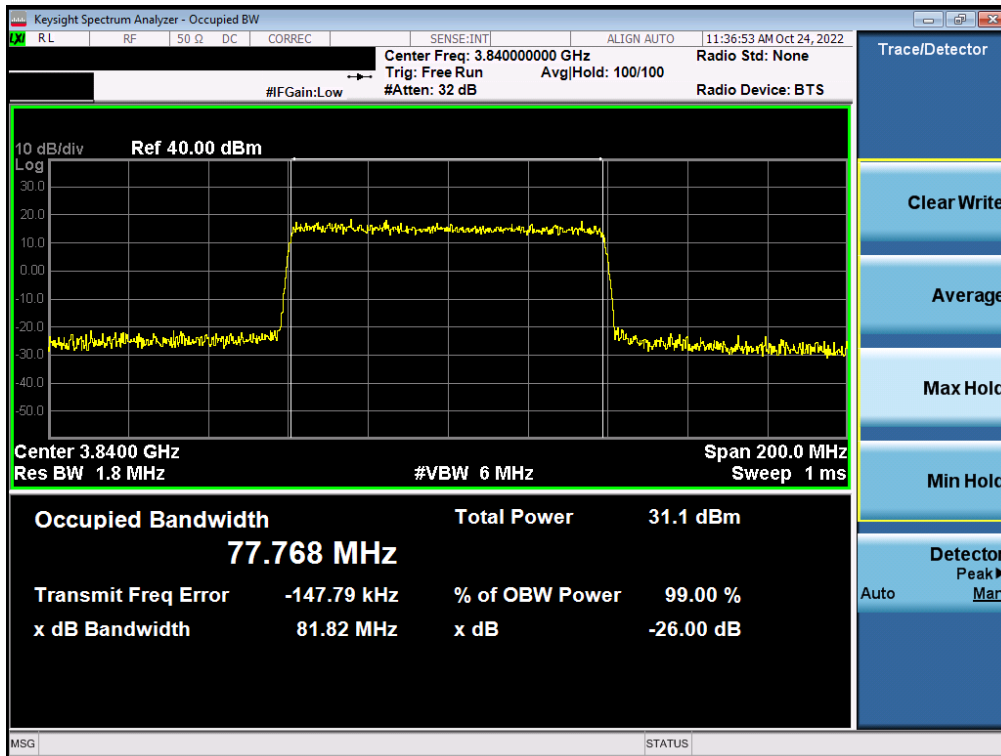


Plot 7-44. Occupied Bandwidth Plot (NR Band n77 - C-Band – 80MHz – QPSK - Full RB)

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 44 of 200

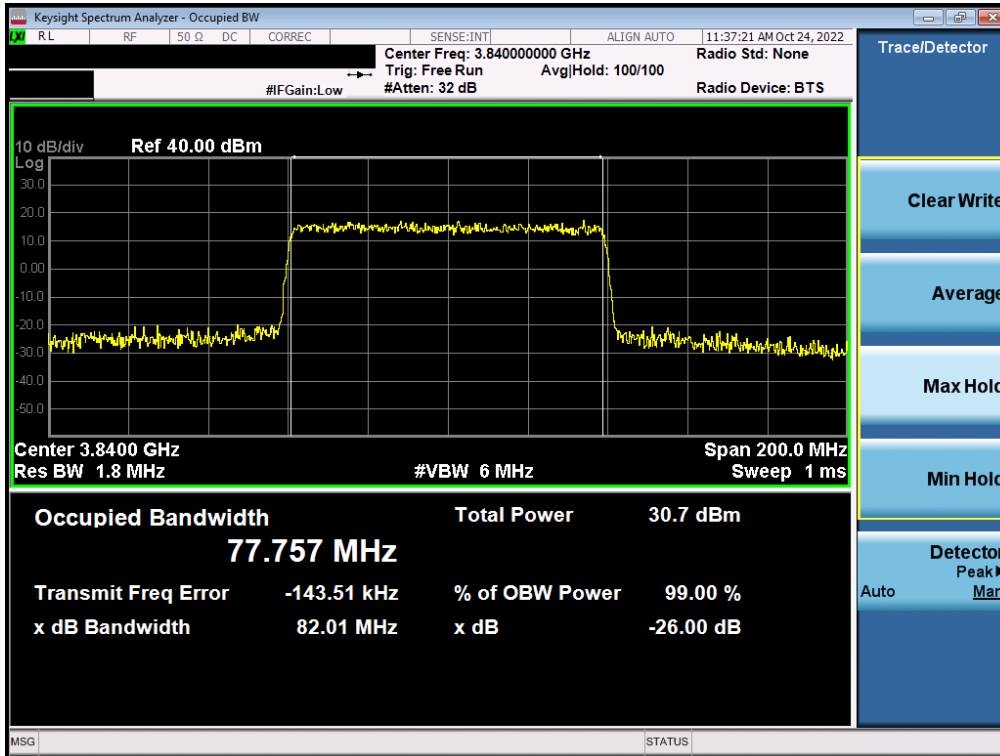


Plot 7-45. Occupied Bandwidth Plot (NR Band n77 - C-Band – 80MHz – 16-QAM - Full RB)

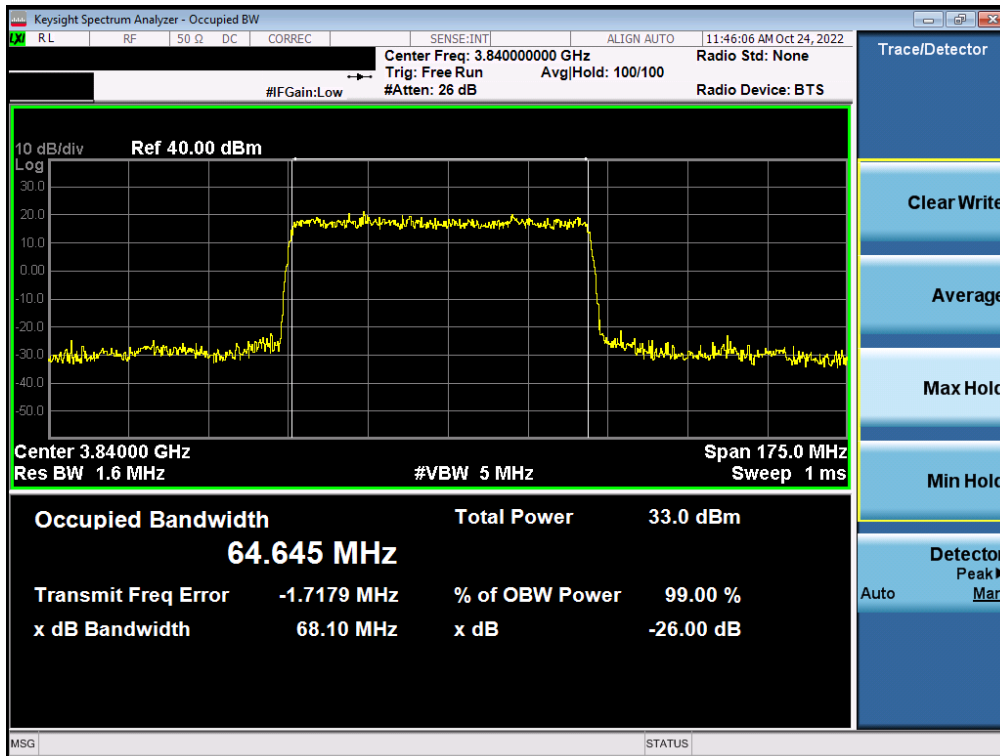


Plot 7-46. Occupied Bandwidth Plot (NR Band n77 - C-Band – 70MHz – $\pi/2$ BPSK - Full RB)

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 45 of 200

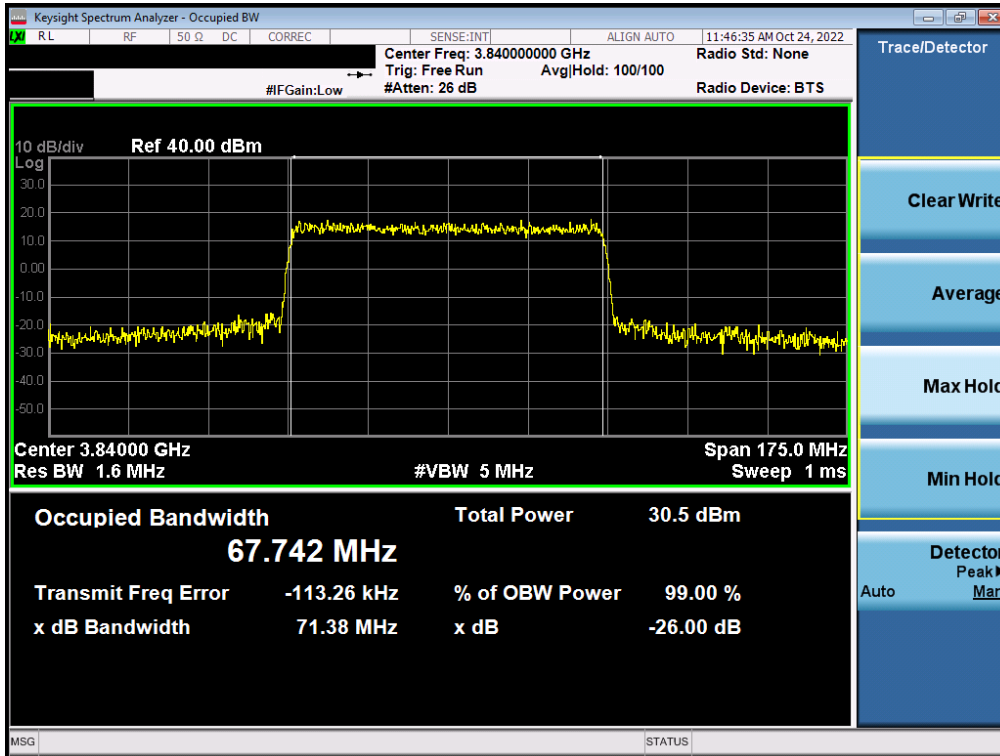


Plot 7-47. Occupied Bandwidth Plot (NR Band n77 - C-Band – 70MHz – QPSK - Full RB)

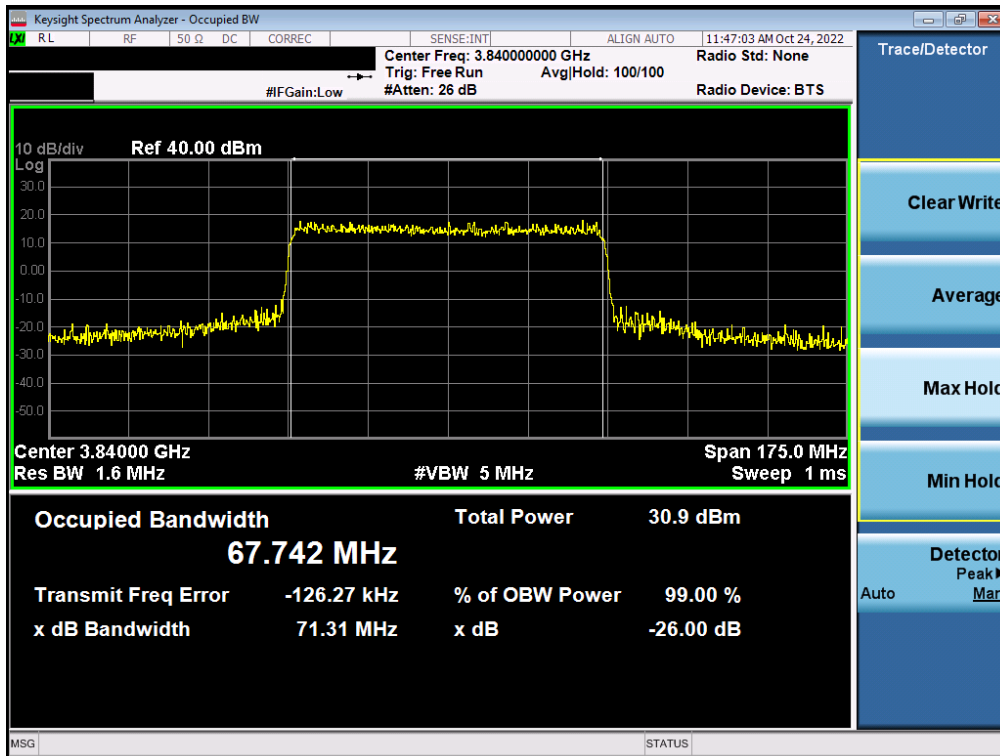


Plot 7-48. Occupied Bandwidth Plot (NR Band n77 - C-Band – 70MHz – 16-QAM - Full RB)

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 46 of 200

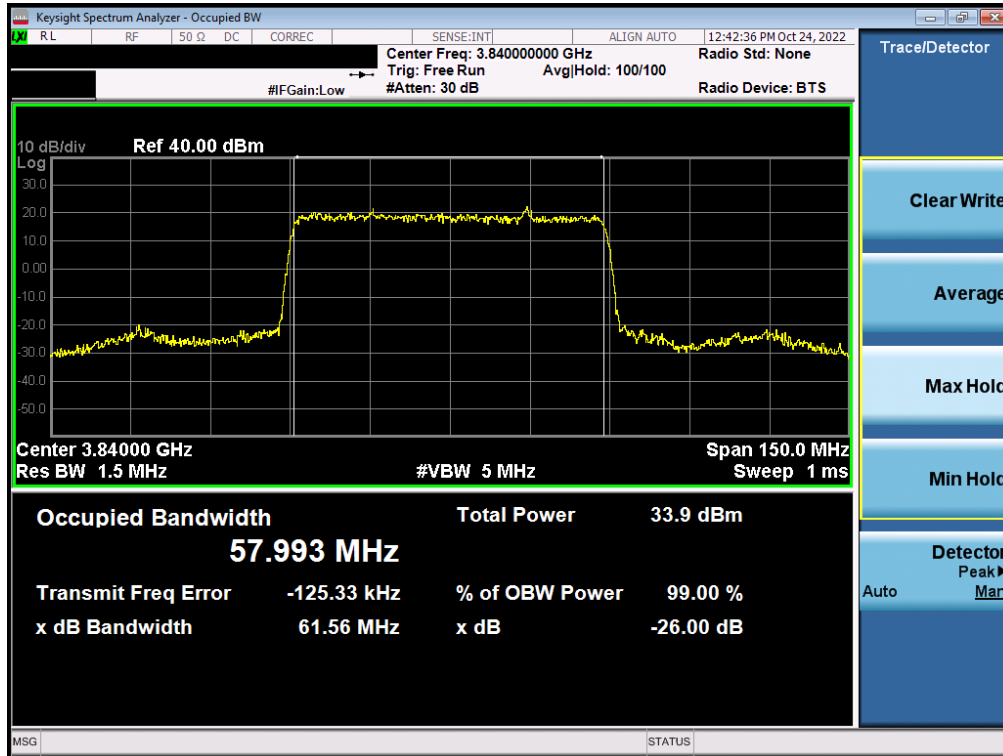


Plot 7-49. Occupied Bandwidth Plot (NR Band n77 - C-Band – 60MHz – $\pi/2$ BPSK - Full RB)

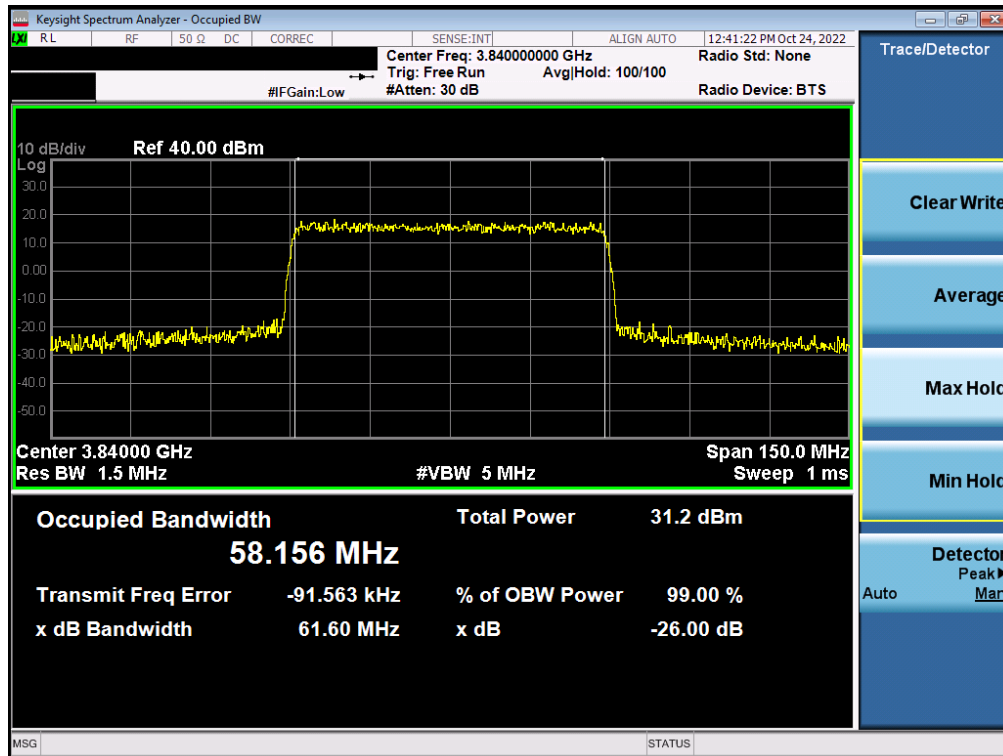


Plot 7-50. Occupied Bandwidth Plot (NR Band n77 - C-Band – 60MHz – QPSK - Full RB)

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 47 of 200

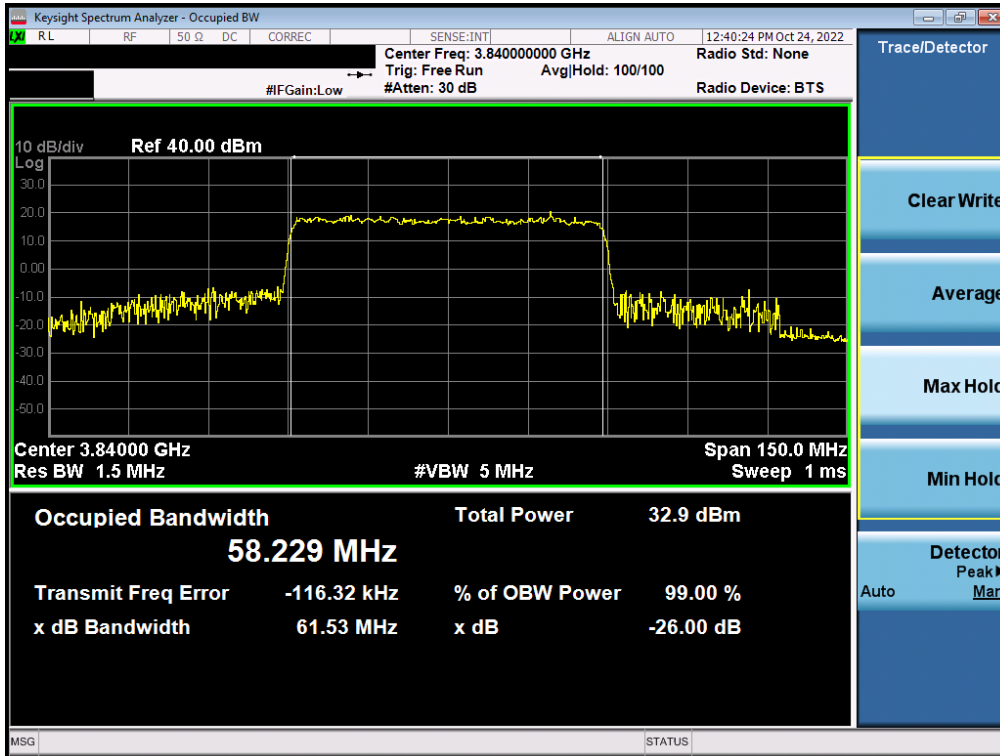


Plot 7-51. Occupied Bandwidth Plot (NR Band n77 - C-Band – 60MHz – 16-QAM - Full RB)

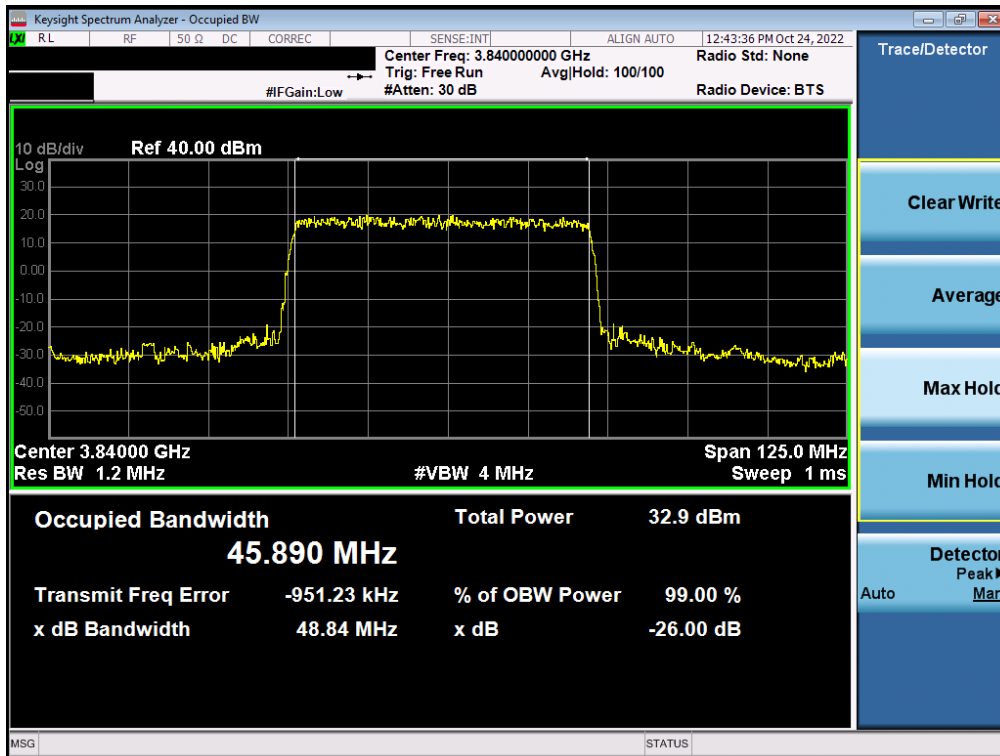


Plot 7-52. Occupied Bandwidth Plot (NR Band n77 - C-Band – 50MHz – $\pi/2$ BPSK - Full RB)

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 48 of 200

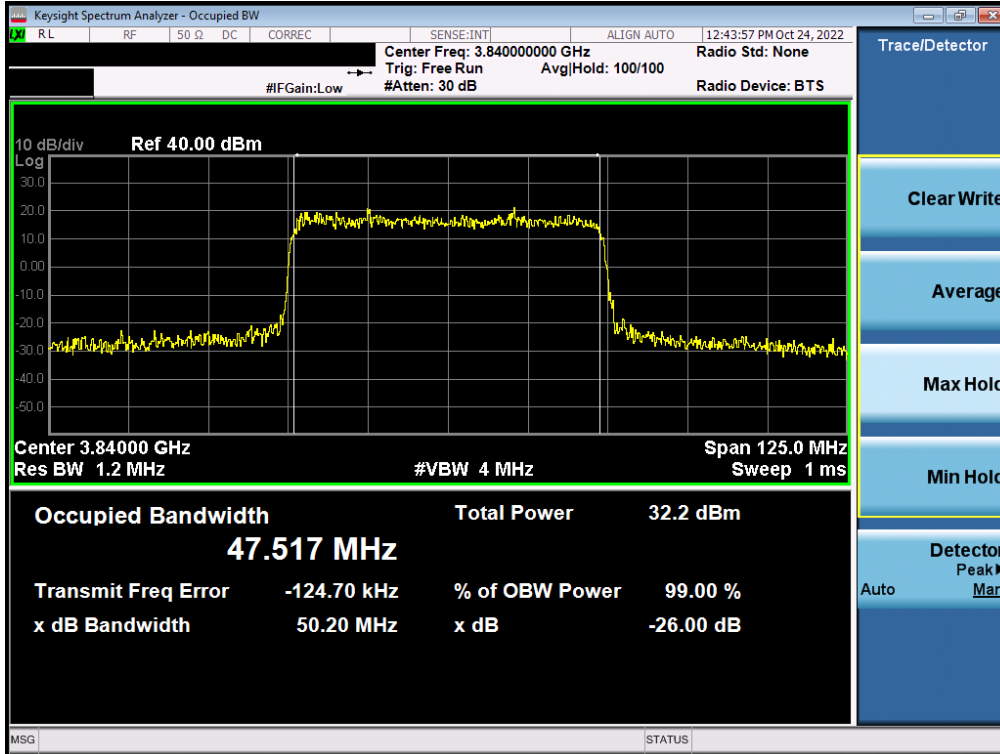


Plot 7-53. Occupied Bandwidth Plot (NR Band n77 - C-Band – 50MHz – QPSK - Full RB)

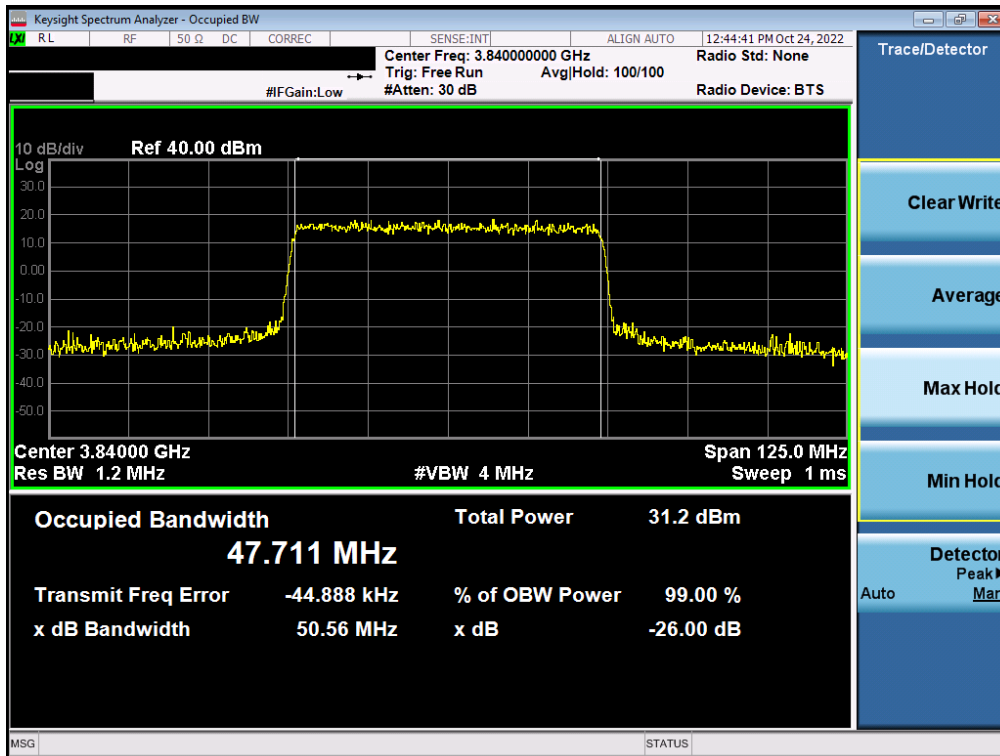


Plot 7-54. Occupied Bandwidth Plot (NR Band n77 - C-Band – 50MHz – 16-QAM - Full RB)

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 49 of 200

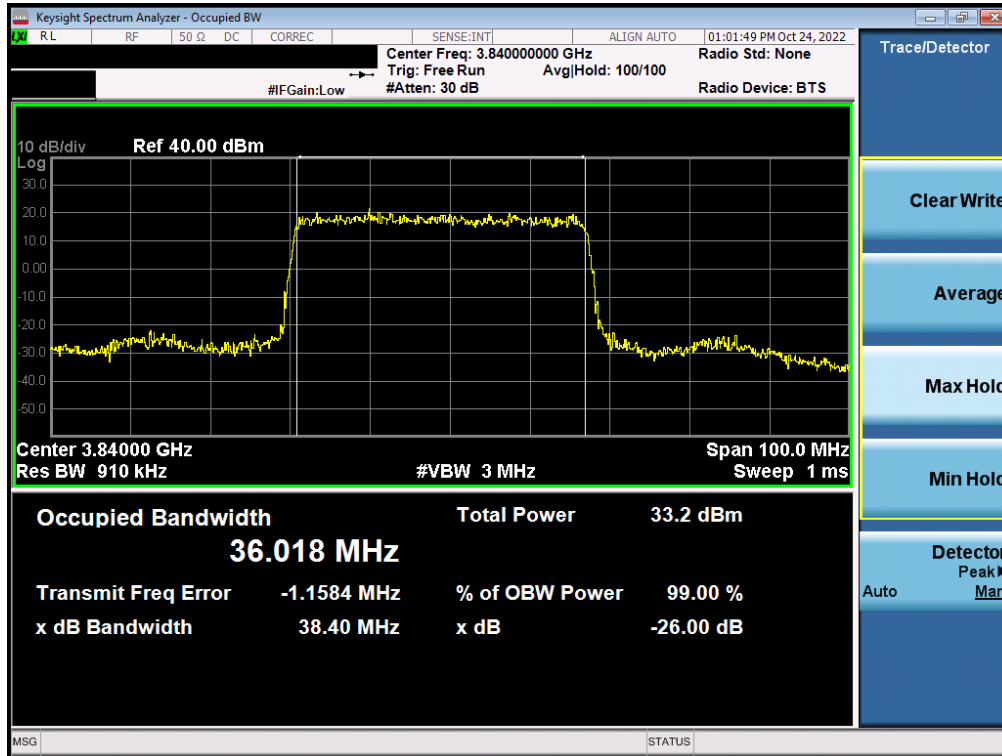


Plot 7-55. Occupied Bandwidth Plot (NR Band n77 - C-Band – 40MHz – $\pi/2$ BPSK - Full RB)

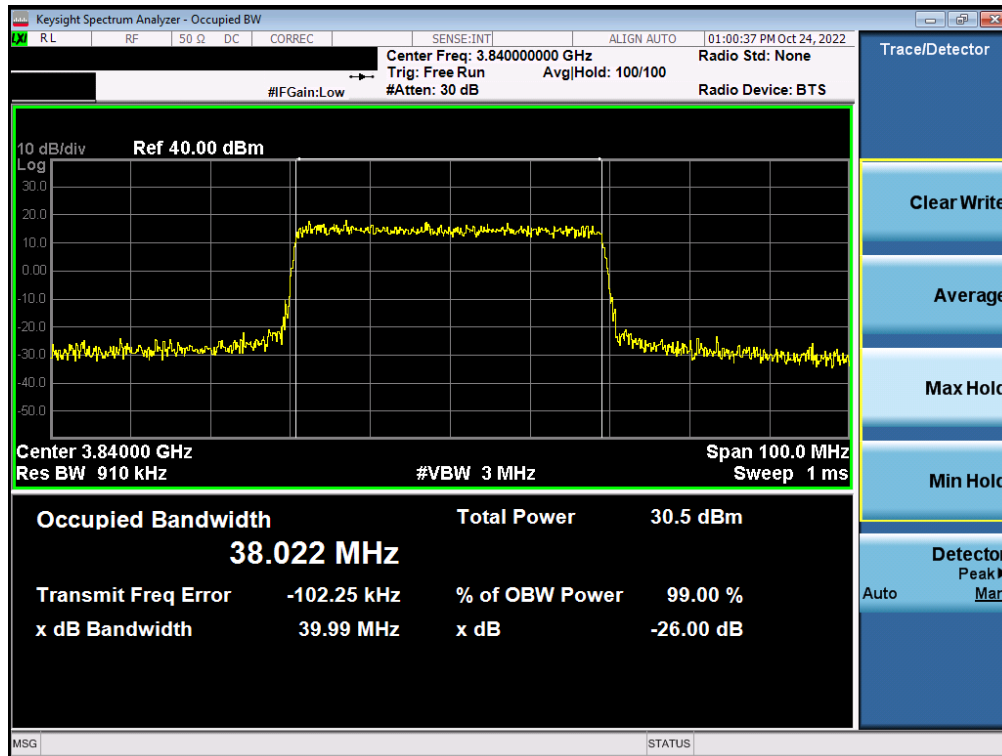


Plot 7-56. Occupied Bandwidth Plot (NR Band n77 - C-Band – 40MHz – QPSK - Full RB)

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 50 of 200

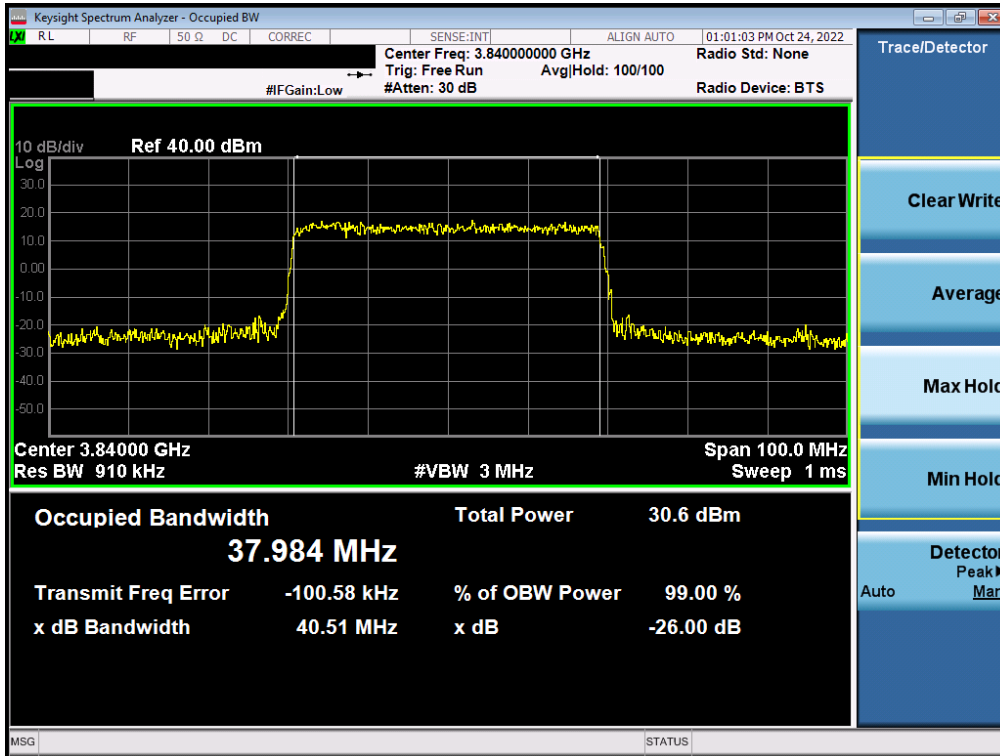

Plot 7-57. Occupied Bandwidth Plot (NR Band n77 - C-Band – 40MHz – 16-QAM - Full RB)

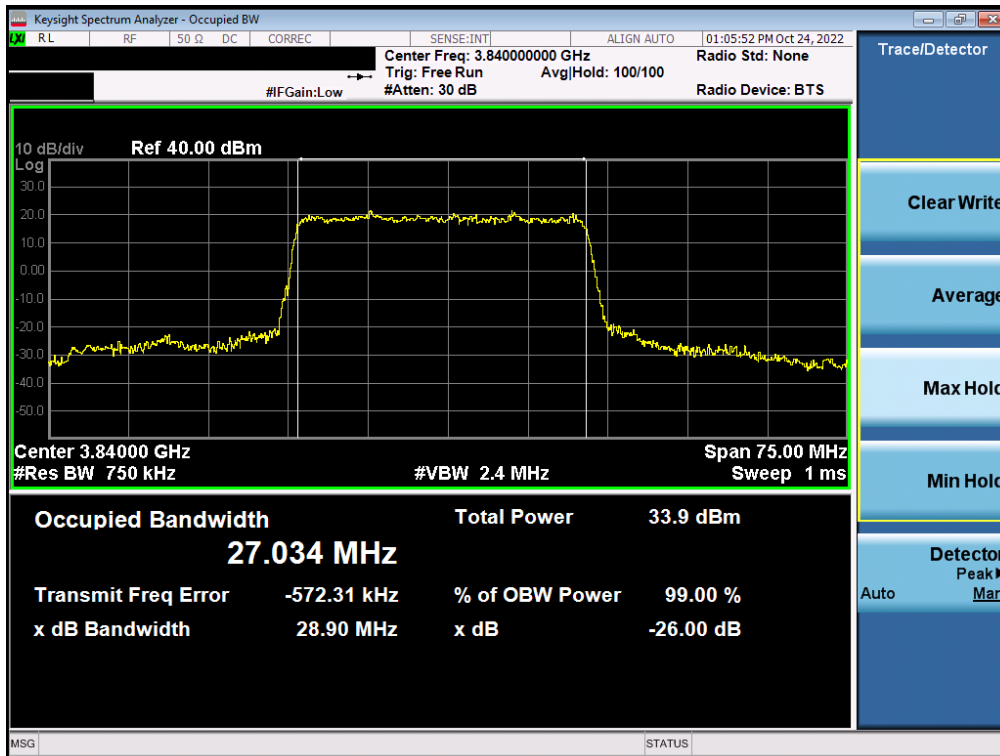

Plot 7-58. Occupied Bandwidth Plot (NR Band n77 - C-Band – 30MHz – $\pi/2$ BPSK - Full RB)

FCC ID: A3LSMS911U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2209010096-05-R1.A3L	Test Dates: 10/11/2022 - 11/15/2022	EUT Type: Portable Handset	Page 51 of 200