



CERTIFICATION TEST REPORT

Report Number. : 4790541040-E5V2

Applicant : SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Model : SM-S916B/DS, SM-S916B

FCC ID : A3LSMS916B

EUT Description : GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax,
NFC, WPT and UWB.

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C

Date Of Issue:

2022-11-08

Prepared by:

UL Korea, Ltd.

26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory

218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea

TEL: (031) 337-9902

FAX: (031) 213-5433



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	2022-10-25	Initial issue	Yeonhee Lim
V2	2022-11-08	Updated to address TCB's Question	Yeonhee Lim

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. DECISION RULES AND MEASUREMENT UNCERTAINTY	7
4.1. METROLOGICAL TRACEABILITY.....	7
4.2. SAMPLE CALCULATION.....	7
4.3. MEASUREMENT UNCERTAINTY	7
4.4. DECISION RULES.....	7
5. EQUIPMENT UNDER TEST.....	8
5.1. EUT DESCRIPTION.....	8
5.2. MAXIMUM OUTPUT POWER.....	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	8
5.4. WORST-CASE CONFIGURATION AND MODE	9
5.5. DESCRIPTION OF TEST SETUP.....	10
6. TEST AND MEASUREMENT EQUIPMENT	12
7. TEST RESULTS SUMMARY	13
8. MEASUREMENT METHODS	14
9. ANTENNA PORT TEST RESULTS.....	15
9.1. ON TIME AND DUTY CYCLE	15
9.2. 20 dB BANDWIDTH.....	16
9.2.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	16
9.2.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....	16
9.3. HOPPING FREQUENCY SEPARATION.....	19
9.3.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	20
9.3.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....	20
9.4. NUMBER OF HOPPING CHANNELS	21
9.4.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	22
9.4.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....	24
9.5. AVERAGE TIME OF OCCUPANCY.....	26
9.5.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	27
9.5.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....	30
9.6. OUTPUT POWER.....	33
9.6.1. BASIC DATA RATE GFSK MODULATION.....	34
9.6.2. ENHANCED DATA RATE Pi/4-DPSK MODULATION	34

9.6.3. ENHANCED DATA RATE 8PSK MODULATION	34
9.6.4. OUTPUT POWER PLOTS	35
9.7. AVERAGE POWER	38
9.7.1. BASIC DATA RATE GFSK MODULATION	38
9.7.2. ENHANCED DATA RATE PI/4-DQPSK MODULATION	38
9.7.3. ENHANCED DATA RATE 8PSK MODULATION	38
9.8. CONDUCTED SPURIOUS EMISSIONS	39
9.8.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	40
9.8.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION	44
10. RADIATED TEST RESULTS	48
10.1. TRANSMITTER ABOVE 1 GHz	50
10.1.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	50
10.1.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION	64
10.2. WORST CASE BELOW 1 GHZ	78
11. AC POWER LINE CONDUCTED EMISSIONS	79
11.1.1. AC Power Line	80

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, NFC, WPT and UWB.
MODEL: SM-S916B/DS, SM-S916B
SERIAL NUMBER: R3CT8056G8T (CONDUCTED);
R3CT90EXV6 (RADIATED);
DATE TESTED: 2022-09-08 ~ 2022-10-14;

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



Seokhwan Hong
Suwon Lab Engineer
UL Korea, Ltd.

Tested By:



Yeonhee Lim
Suwon Lab Engineer
UL Korea, Ltd.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. KDB 558074 D01 15.247 Meas Guidance v05r02.
4. ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input type="checkbox"/>	Chamber 1(3m semi-anechoic chamber)
<input checked="" type="checkbox"/>	Chamber 2(3m semi-anechoic chamber)
<input type="checkbox"/>	Chamber 3(3m semi-anechoic chamber)
<input type="checkbox"/>	Chamber 4(3m Full-anechoic chamber)
<input type="checkbox"/>	Chamber 5(3m Full-anechoic chamber)

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

4. DECISION RULES AND MEASUREMENT UNCERTAINTY

4.1. METROLOGICAL TRACEABILITY

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

$$\begin{aligned} \text{Corrected Reading (dBuV)} &= \text{Meter Reading (dBuV)} + \text{External Cable (dB)} + \\ &\text{Cableloss (dB)} \\ 46.62 \text{ dBuV} + 9.8 \text{ dB} + 0.1 \text{ dB} &= 56.52 \text{ dBuV} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.02 dB
Radiated Disturbance, 30 MHz to 1 GHz	4.05 dB
Radiated Disturbance, 1 GHz to 18 GHz	5.78 dB
Radiated Disturbance, 18 GHz to 40 GHz	5.58 dB

Uncertainty figures are valid to a confidence level of 95%.

4.4. DECISION RULES

Decision rule for statement(s) of conformity is based on Procedure 2, Clause 4.4.3 in IEC Guide 115:2007.

5. EQUIPMENT UNDER TEST

5.1. EUT DESCRIPTION

The EUT is a GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax and NFC, WPT and UWB. This test report addresses the BT(DSS) operational mode.

This report covers the Samsung models SM-S916B/DS and SM-S916B. These models are identical in hardware except SM-S916B has single SIM tray. With some pre-scan, model SM-S916B/DS was set for final test.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range [MHz]	Mode	Power Mode	Output Power [dBm]	Output Power [mW]
2402 ~ 2480	Basic GFSK	Average	13.898	24.536
		Peak	14.475	28.022
	Enhanced Pi/4-DPSK	Average	10.994	12.572
		Peak	13.492	22.346
	Enhanced 8PSK	Average	10.971	12.505
		Peak	14.013	25.194

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The internal antenna was Permanently attached.
 Therefore this E.U.T Complies with the requirement of §15.203.**

The radio utilizes an internal antennas, with ANT 1's maximum gain of -1.56 dBi and ANT 2's maximum gain of -4.52 dBi.

“Wi-Fi 1” and “Wi-Fi 2” as indicated in antenna specification are written as ANT 1 and ANT 2 in this report.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

- Worst condition

	ANT1	ANT2
Axis	X	Z

GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA800	R37R38J4A28SE3	N/A
Data Cable	SAMSUNG	EP-DN980	GH39-02111ABBE	N/A


I/O CABLE

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0 m	N/A


TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests.
 Test software enable BT communications.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

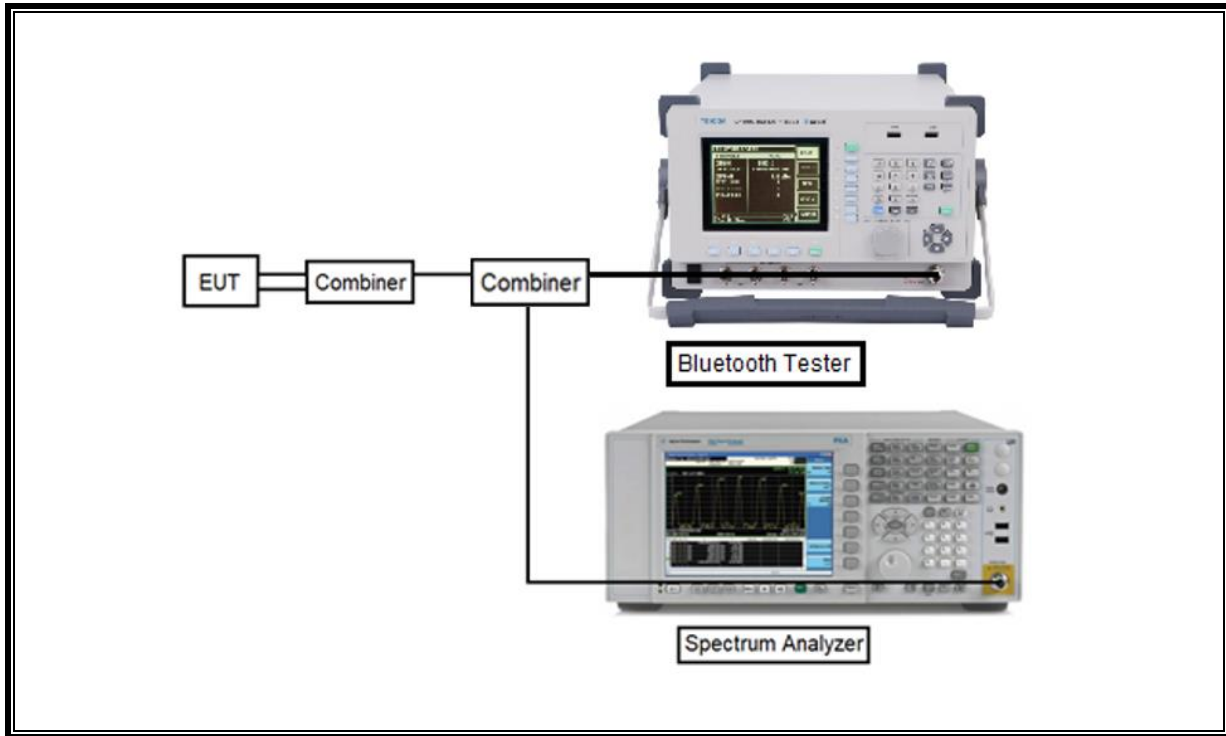

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

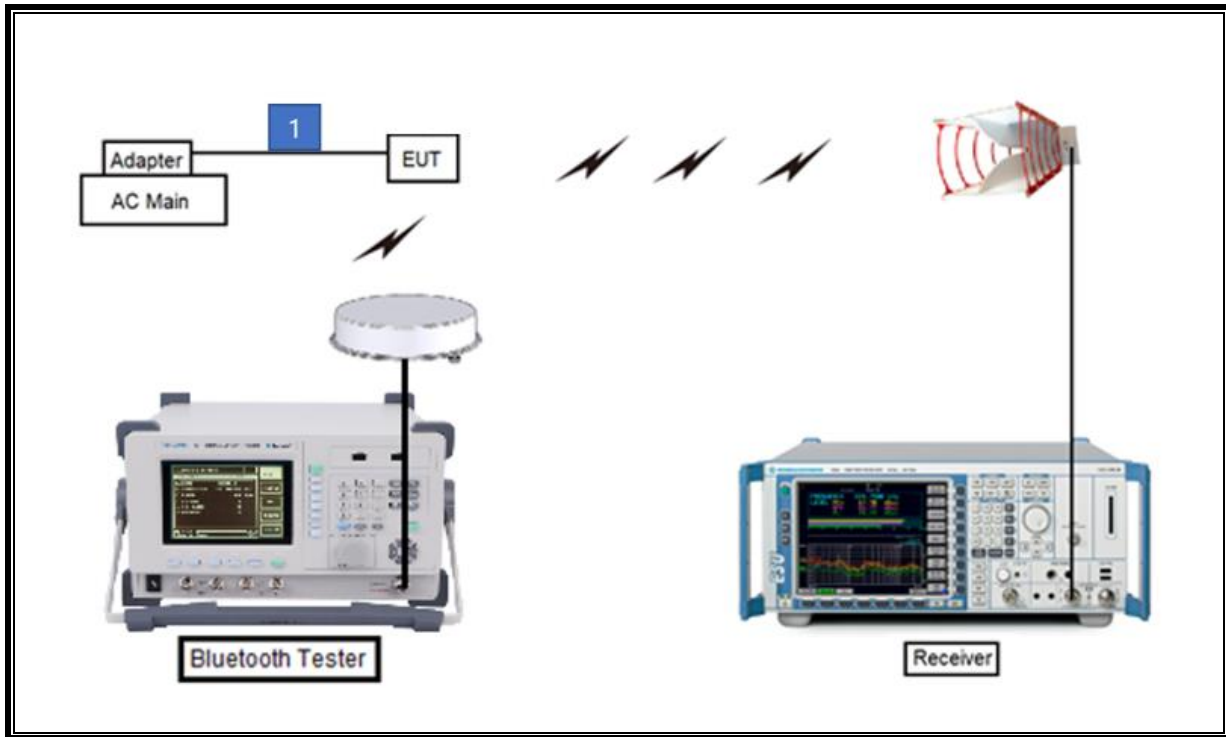

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	2024-08-15
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	2024-08-15
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	2024-08-15
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	2023-10-06
Antenna, Horn, 18 GHz	ETS	3115	00167211	2024-08-04
Antenna, Horn, 18 GHz	ETS	3115	00161451	2024-08-21
Antenna, Horn, 18 GHz	ETS	3117	00168724	2024-08-04
Antenna, Horn, 18 GHz	ETS	3117	00168717	2024-08-21
Antenna, Horn, 40 GHz	ETS	3116C	00166155	2024-08-02
Preamplifier	ETS	3116C-PA	00168841	2023-08-04
Directional Antenna	Cobham	FPA3-0.8-6.0R/1329	80108-0004	N/A
Directional Antenna	Cobham	FPA3-0.8-6.0R/1329	110367-0003	N/A
Preamplifier, 1000 MHz	Sonoma	310N	341282	2023-08-02
Preamplifier, 1000 MHz	Sonoma	310N	351741	2023-08-02
Preamplifier, 1000 MHz	Sonoma	310N	370599	2023-08-02
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	2023-08-02
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	2023-08-01
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	2023-08-01
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	2023-08-03
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	2023-08-01
Spectrum Analyzer, 44 GHz	KEYSIGHT	N9030B	MY60070693	2023-01-18
Spectrum Analyzer, 44 GHz	KEYSIGHT	N9040B	MY60080268	2023-01-19
Average Power Sensor	Agilent / HP	U2000	MY54270007	2023-08-03
Average Power Sensor	Agilent / HP	U2000	MY54260010	2023-08-03
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	2023-08-02
Power Splitter	MINI-CIRCUITS	WA1534	UL003	2023-01-11
Power Splitter	MINI-CIRCUITS	WA1534	UL004	2023-01-11
Attenuator	PASTERNAK	PE7087-10	A009	2023-08-03
Attenuator	PASTERNAK	PE7087-10	A001	2023-08-03
Attenuator	PASTERNAK	PE7087-10	A008	2023-08-03
Attenuator	PASTERNAK	PE7004-10	2	2023-08-01
EMI Test Receive, 40 GHz	R&S	ESU40	100439	2023-08-02
EMI Test Receive, 40 GHz	R&S	ESU40	100457	2023-07-29
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	2023-08-02
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	2023-08-01
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	020	2023-08-01
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	2023-08-02
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	2023-08-01
High Pass Filter 3GHz	Micro-Tronics	HPM17543	020	2023-08-01
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	2023-08-02
High Pass Filter 6GHz	Micro-Tronics	HPS17542	016	2023-08-01
High Pass Filter 6GHz	Micro-Tronics	HPS17542	021	2023-08-01
LISN	R&S	ENV-216	101837	2023-08-04
Termination	WEINSCHEL	M1406A	T09	2023-08-03
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

7. TEST RESULTS SUMMARY

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
2.1051, 15.247(d)	Band Edge / Conducted Spurious Emission	-20 dBc	Conducted	PASS
15.247 (b)(1)	TX conducted output power	< 21 dBm		PASS
15.247 (a)(1)	Hopping frequency separation	> two-thirds of the 20 dB bandwidth		PASS
15.247 (a)(1)(iii)	Number of Hopping channels	More than 15 non-overlapping channels		PASS
15.247 (a)(1)(iii)	Avg Time of Occupancy	< 8 dBm		PASS
15.207(a)	AC Power Line conducted emissions	Section 11	Power Line conducted	PASS
15.205, 15.209	Radiated Spurious Emission	< 54dBuV/m(Av)	Radiated	PASS

8. MEASUREMENT METHODS

20dB BW : ANSI C63.10, Section 6.9.2

99% BW : ANSI C63.10, Section 6.9.3

HOPPING FREQUENCY SEPARATION : ANSI C63.10, Section 7.8.2

NUMBER OF HOPPING CHANNELS : ANSI C63.10, Section 7.8.3

AVERAGE TIME OF OCCUPANCY : ANSI C63.10, Section 7.8.4

OUTPUT POWER : ANSI C63.10, Section 7.8.5.

Out-of-band EMISSIONS (Conducted) : ANSI C63.10, Section 7.8.6, 7.8.8

Out-of-band EMISSIONS IN NON-RESTRICTED BANDS: ANSI C63.10, Section 6.

Out-of-band EMISSIONS IN RESTRICTED BANDS : ANSI C63.10, Section 6.

AC Power Line Conducted Emission : ANSI C63.10-2013, Section 6.2.

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS


None; for reporting purposes only.

PROCEDURE


ANSI C63.10, Section 11.6 : Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	On time [msec]	Period [msec]	Duty Cycle [%]	1/T Minimum VBW [kHz]
BDR	2.877	3.751	76.700	0.35
EDR	2.871	3.753	76.499	0.35

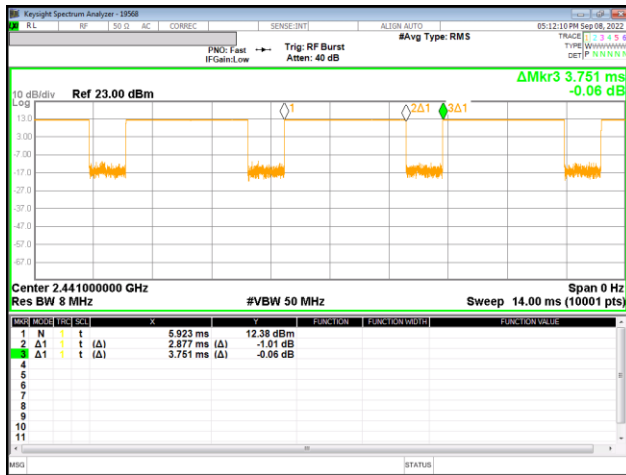

BDR

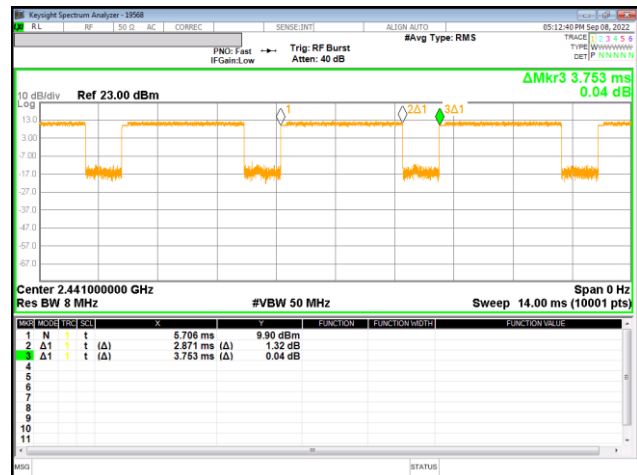

EDR

9.2. 20 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.


RESULTS


9.2.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

Ant.	Channel	Frequency [MHz]	20 dB Bandwidth [kHz]
ANT1	0	2402	942.0
	39	2441	942.4
	78	2480	940.9
ANT2	0	2402	943.1
	39	2441	940.2
	78	2480	935.6
Worst			943.1


9.2.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

Ant.	Channel	Frequency [MHz]	20 dB Bandwidth [MHz]
ANT1	0	2402	1.324
	39	2441	1.316
	78	2480	1.324
ANT2	0	2402	1.306
	39	2441	1.327
	78	2480	1.296
Worst			1.327

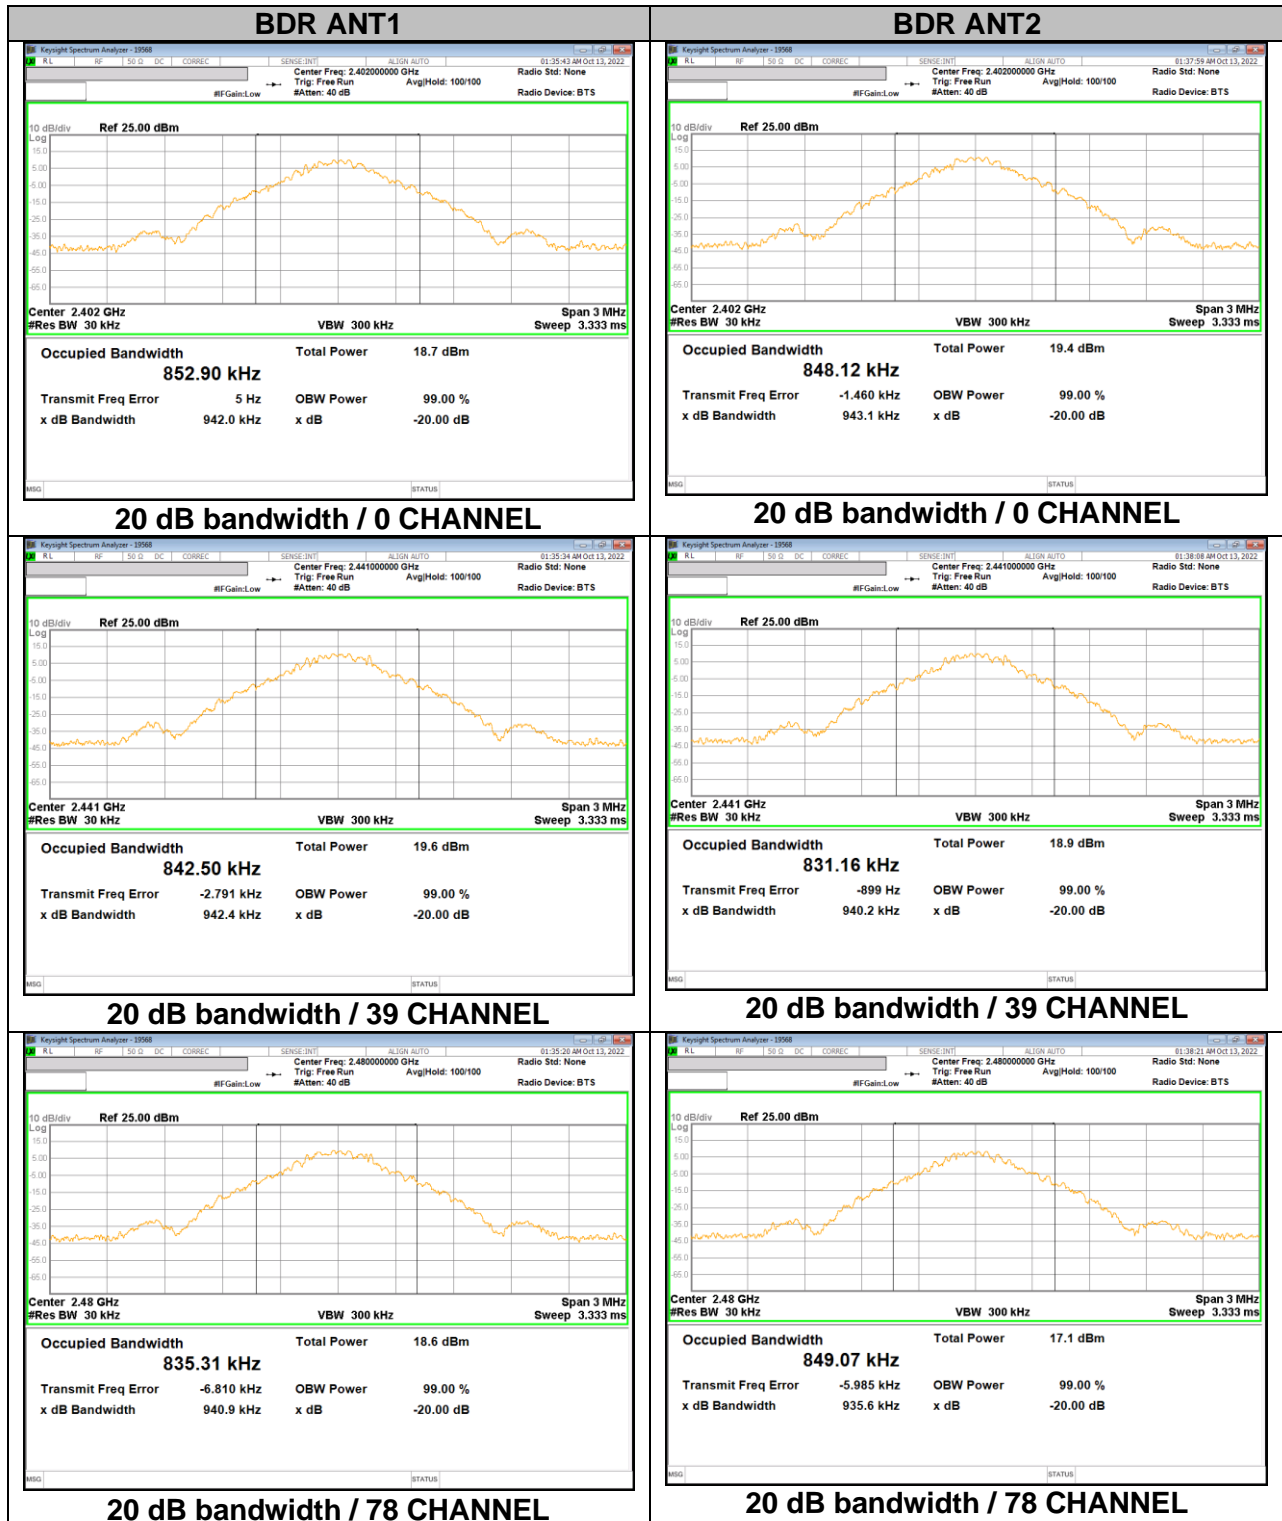


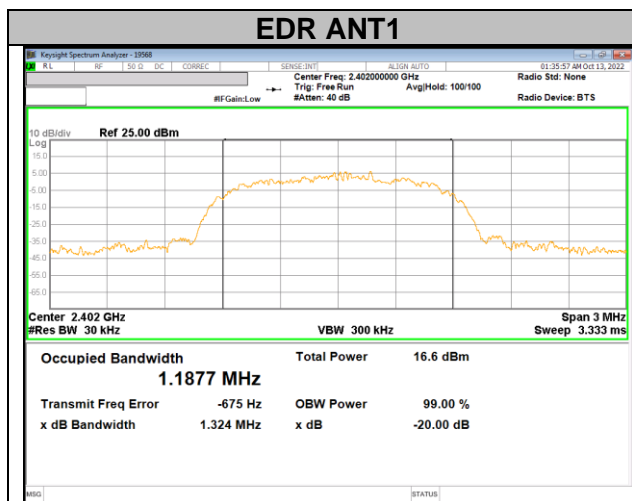


20 dB bandwidth / 0 CHANNEL

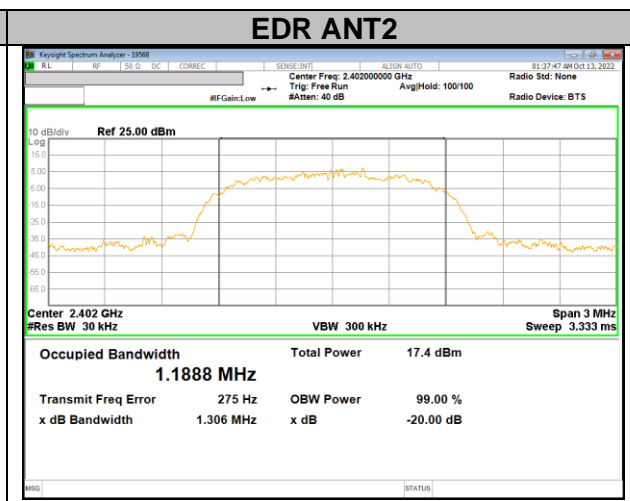


20 dB bandwidth / 0 CHANNEL

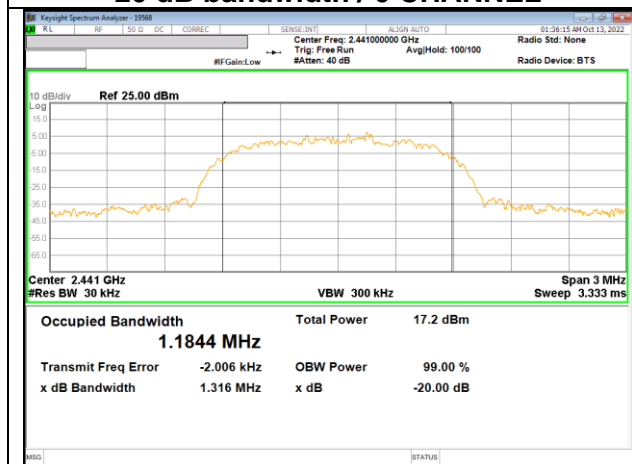


20 dB bandwidth / 39 CHANNEL

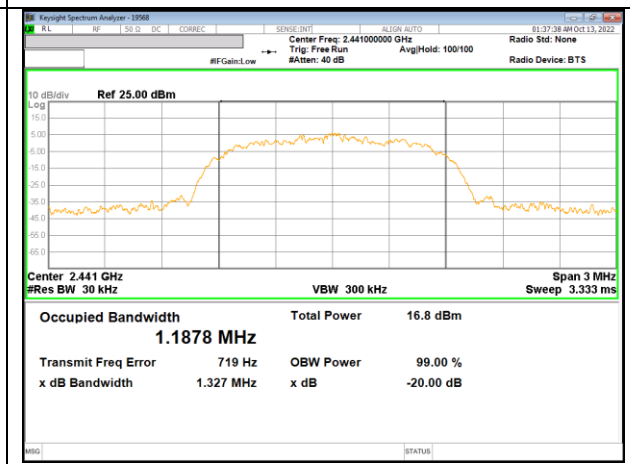

20 dB bandwidth / 39 CHANNEL

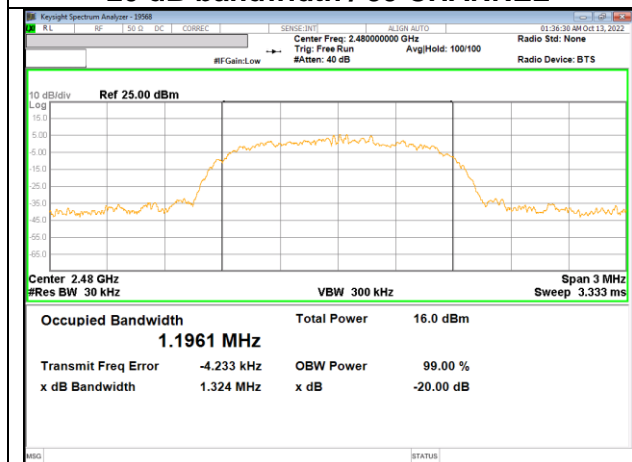

20 dB bandwidth / 78 CHANNEL

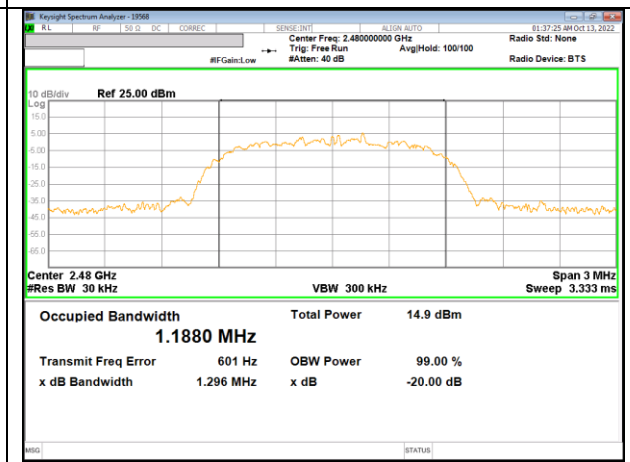

20 dB bandwidth / 78 CHANNEL

9.3. HOPPING FREQUENCY SEPARATION

LIMITS

FCC §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.



Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to $VBW \geq RBW$. The sweep time is coupled.

RESULTS

9.3.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

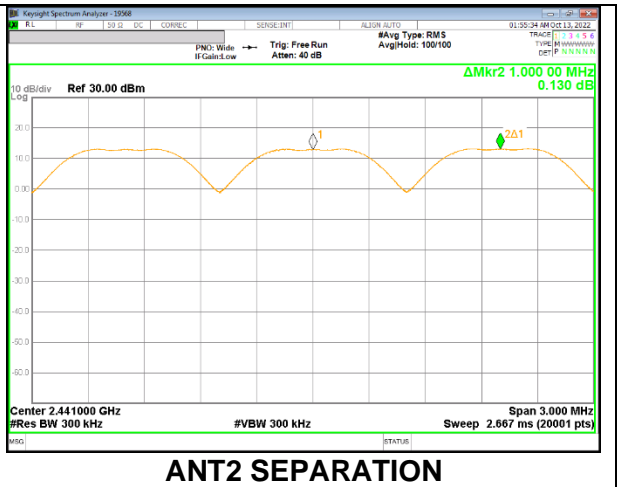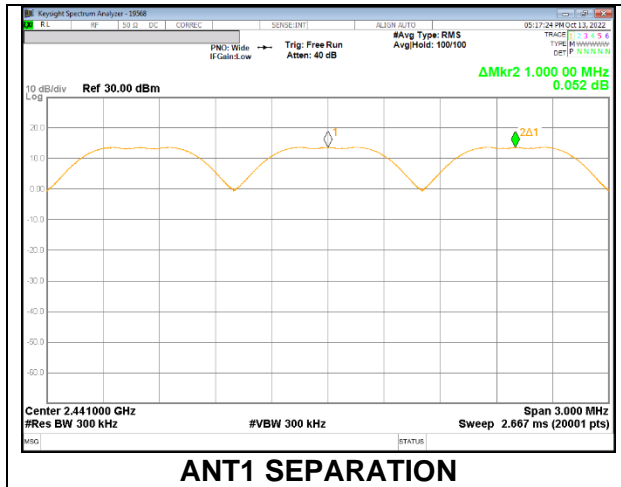

9.3.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

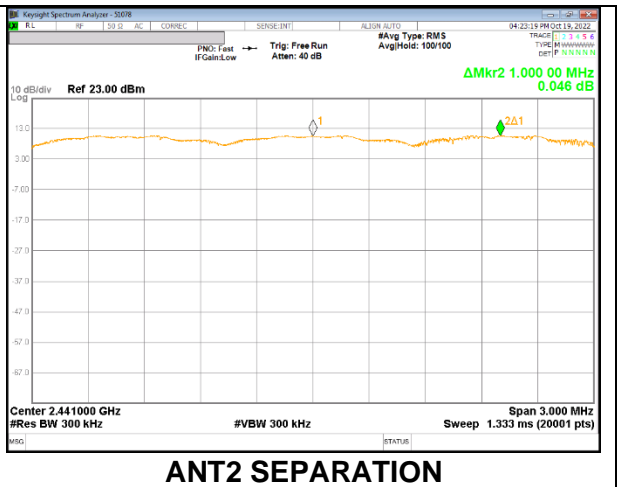

9.4. NUMBER OF HOPPING CHANNELS

LIMITS

FCC §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS


Normal Mode: All Channels Observed

9.4.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION


- ANT1

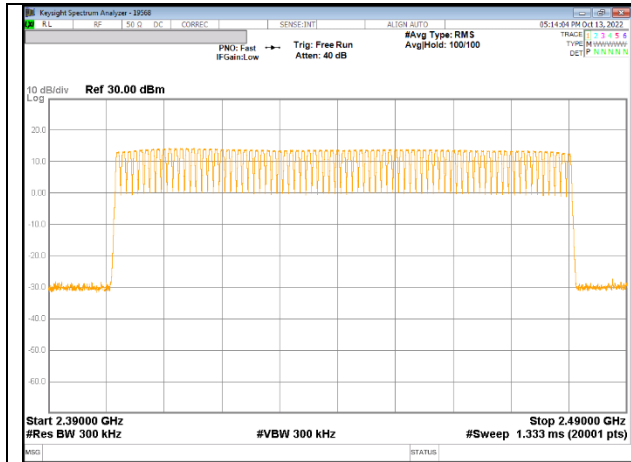


100 MHz Span

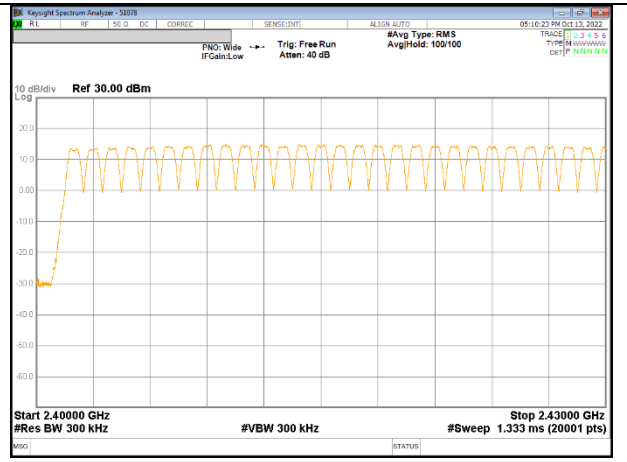

30MHz SPAN, SEGMENT 1 OF 3

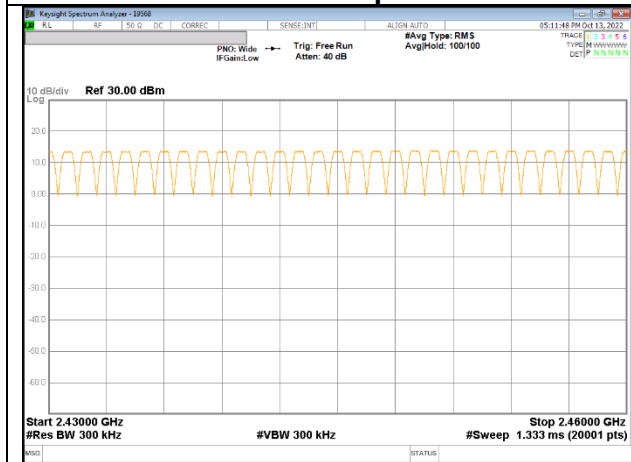

30MHz SPAN, SEGMENT 2 OF 3

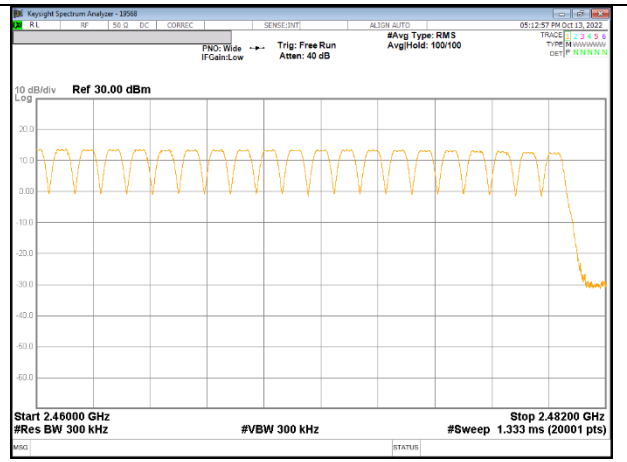


30MHz SPAN, SEGMENT 3 OF 3


- ANT2




100 MHz Span

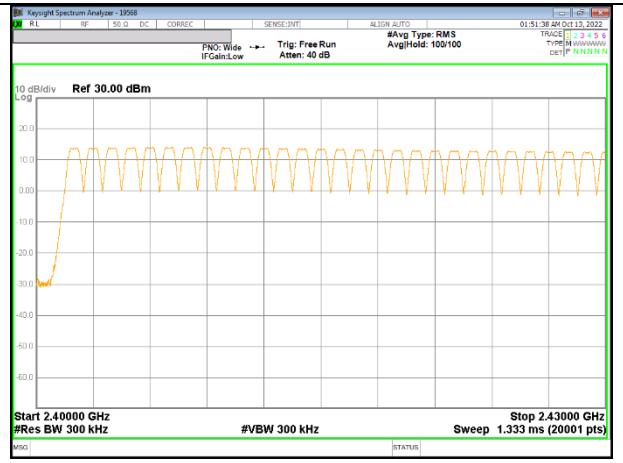

30MHz SPAN, SEGMENT 1 OF 3

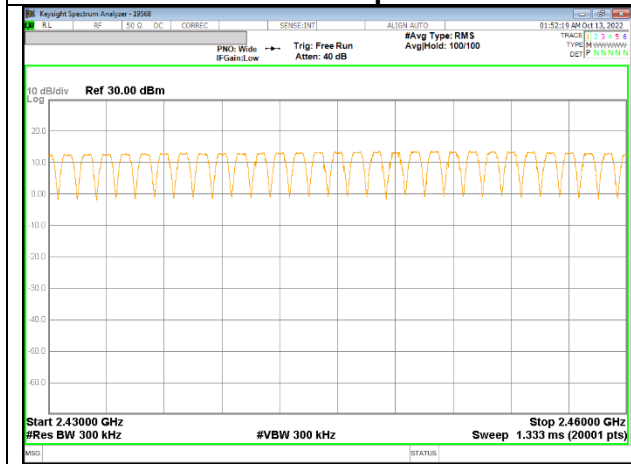


30MHz SPAN, SEGMENT 2 OF 3

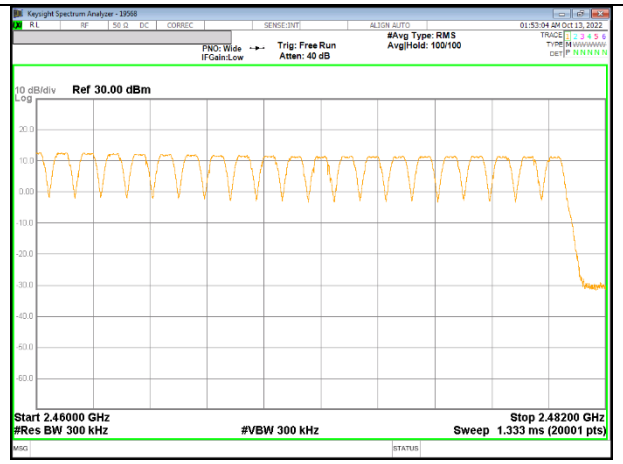


30MHz SPAN, SEGMENT 3 OF 3

9.4.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION


- ANT1

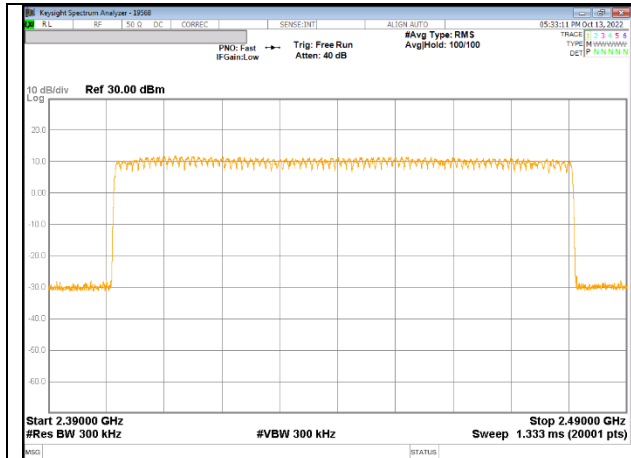


100 MHz Span

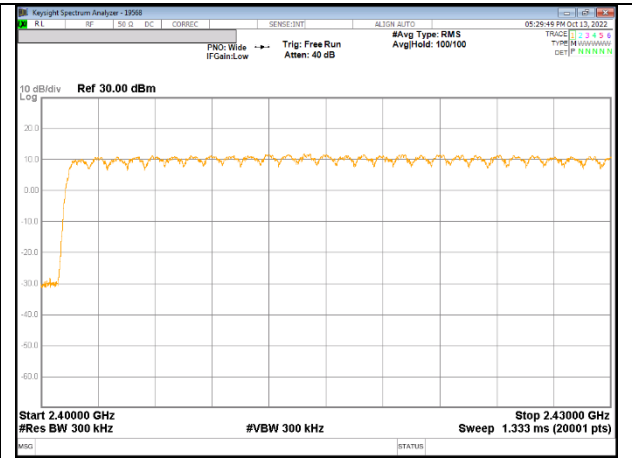

30MHz SPAN, SEGMENT 1 OF 3

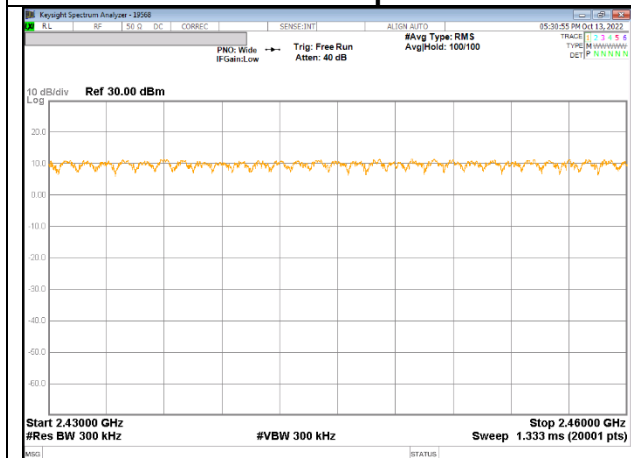


30MHz SPAN, SEGMENT 2 OF 3

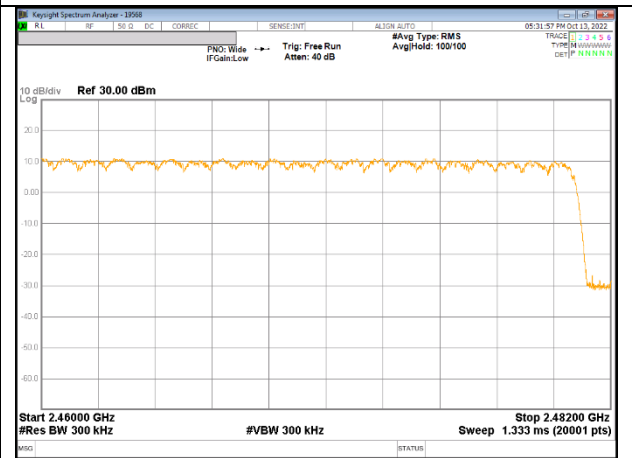


30MHz SPAN, SEGMENT 3 OF 3


- ANT2

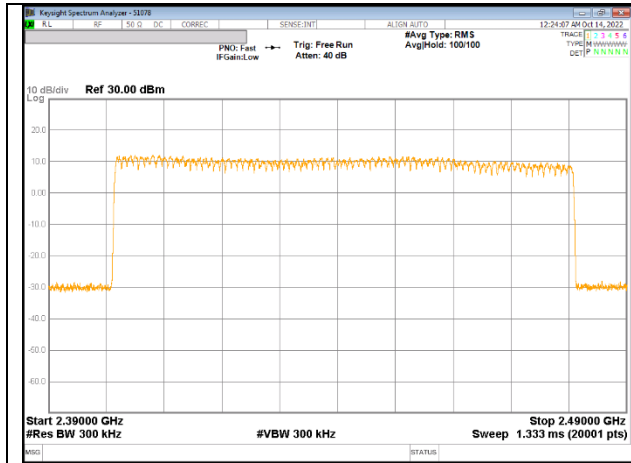


100 MHz Span

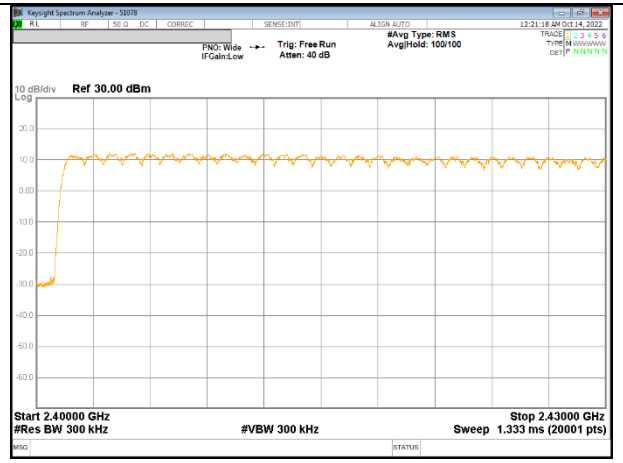

30MHz SPAN, SEGMENT 1 OF 3

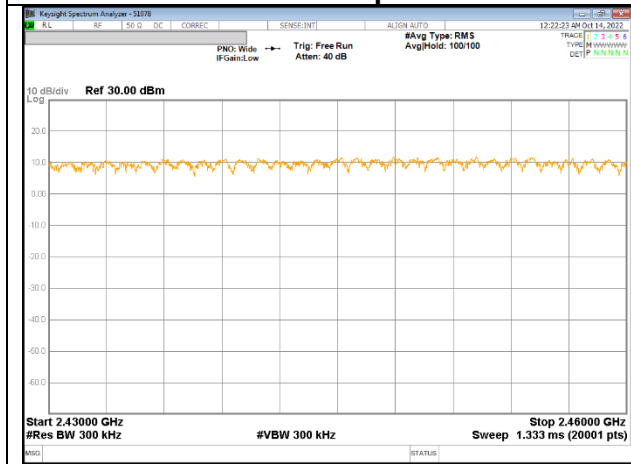

30MHz SPAN, SEGMENT 2 OF 3

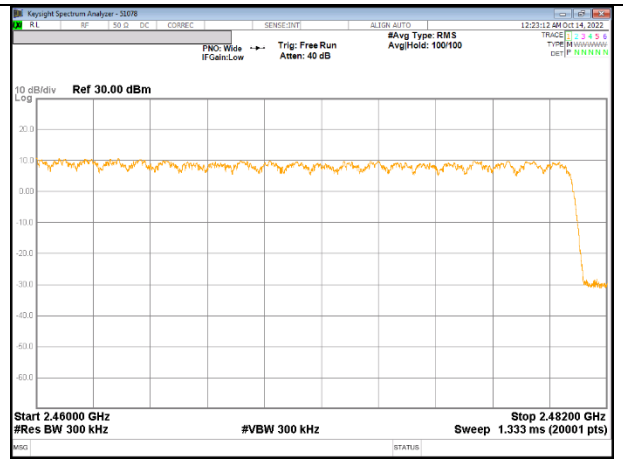

30MHz SPAN, SEGMENT 3 OF 3

9.5. AVERAGE TIME OF OCCUPANCY

LIMITS

FCC §15.247 (a) (1) (iii)

RSS-247 (5.1) (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 3.16 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{ pulse width}$.


RESULTS

9.5.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION


DH Packet	Pulse Width [msec]	Number of Pulses in 3.16 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK ANT1 Normal					
DH1	0.374	32	0.120	0.4	-0.280
DH3	1.630	14	0.228	0.4	-0.172
DH5	2.873	12	0.345	0.4	-0.055
GFSK ANT1 AFH					
DH1	0.374	8	0.030	0.4	-0.370
DH3	1.630	3.5	0.057	0.4	-0.343
DH5	2.873	3	0.086	0.4	-0.314

DH Packet	Pulse Width [msec]	Number of Pulses in 3.16 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK ANT2 Normal					
DH1	0.375	32	0.120	0.4	-0.280
DH3	1.629	16	0.261	0.4	-0.139
DH5	2.877	13	0.374	0.4	-0.026
GFSK ANT2 AFH					
DH1	0.375	8	0.030	0.4	-0.370
DH3	1.629	4	0.065	0.4	-0.335
DH5	2.877	3.25	0.094	0.4	-0.306


- ANT1

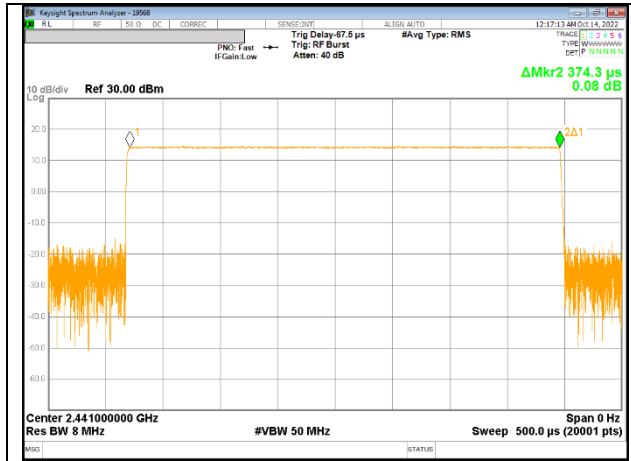


PULSE WIDTH – DH1

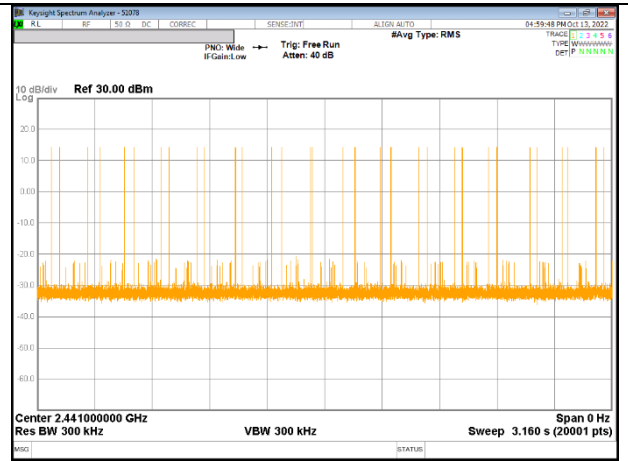


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH1

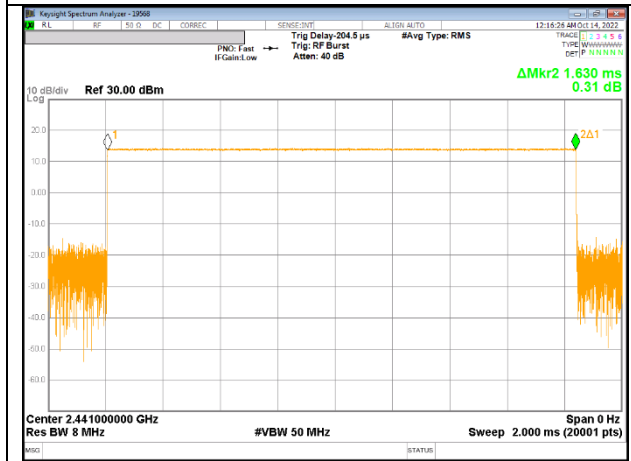


PULSE WIDTH – DH3

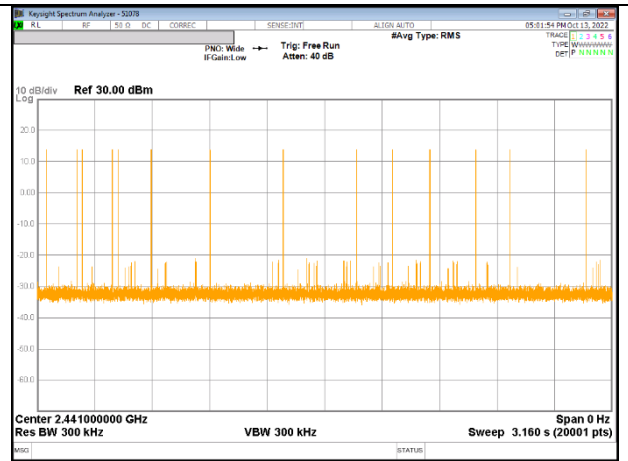

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3

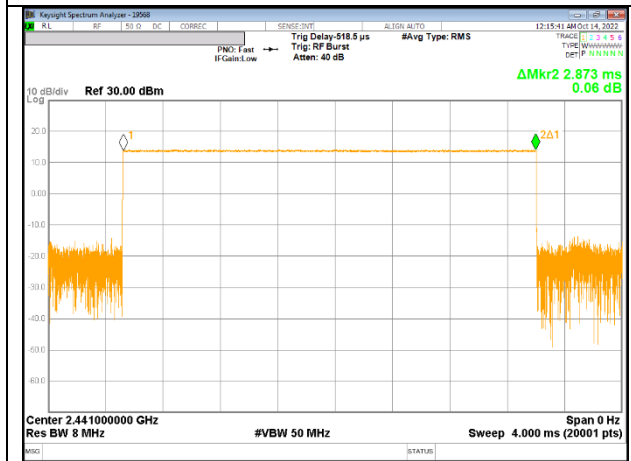


PULSE WIDTH – DH5

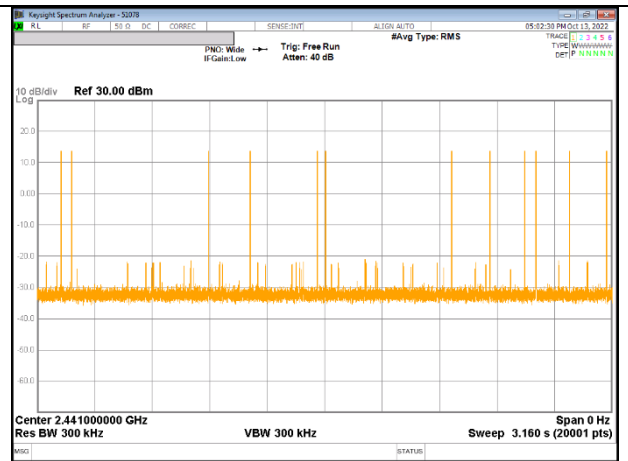

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5


- ANT2

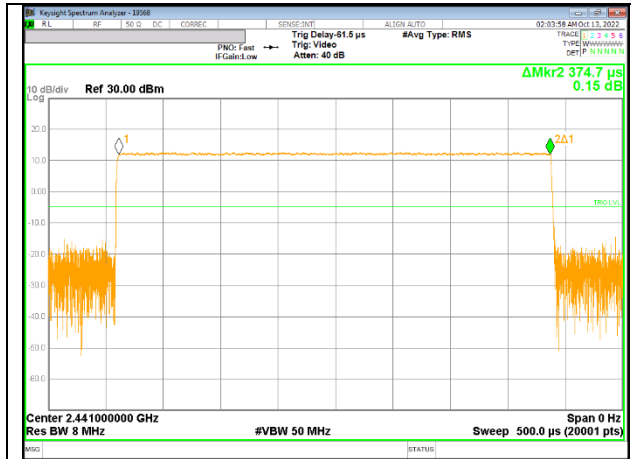


PULSE WIDTH – 3-DH1




NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – 3-DH1

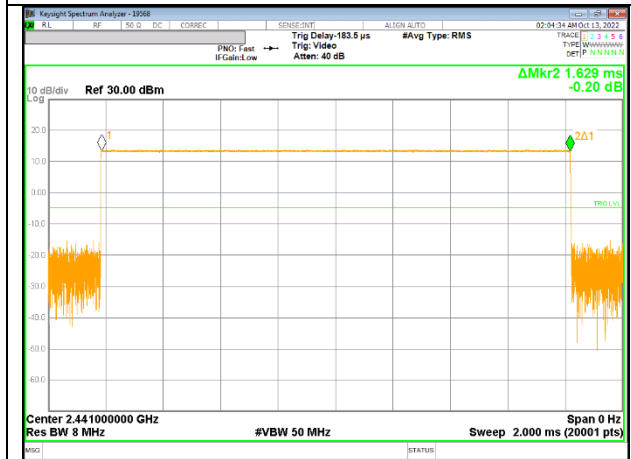

PULSE WIDTH – 3-DH3

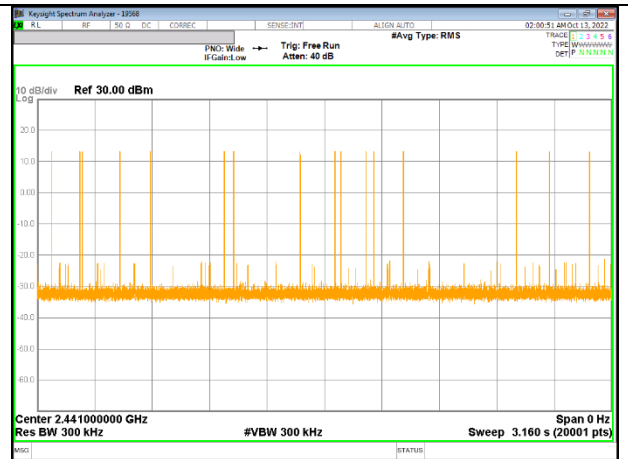

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – 3-DH3

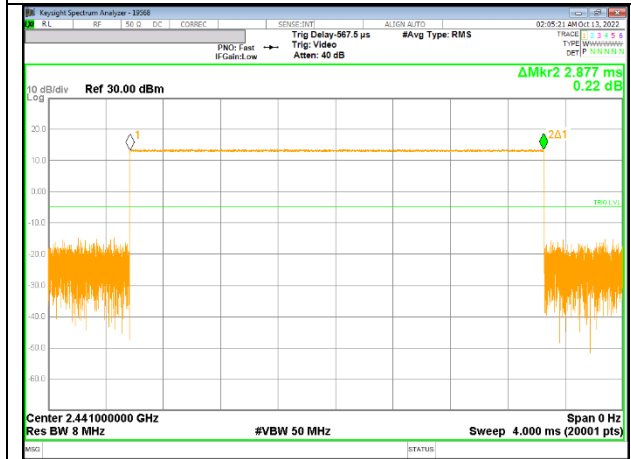

PULSE WIDTH – 3-DH5




NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – 3-DH5

9.5.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

DH Packet	Pulse Width [msec]	Number of Pulses in 3.16 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
8PSK ANT1 Normal					
DH1	0.381	32	0.120	0.4	-0.280
DH3	1.630	16	0.261	0.4	-0.139
DH5	2.879	11	0.317	0.4	-0.083
8PSK ANT1 AFH					
DH1	0.381	8	0.030	0.4	-0.370
DH3	1.630	4	0.065	0.4	-0.335
DH5	2.879	2.75	0.079	0.4	-0.321

DH Packet	Pulse Width [msec]	Number of Pulses in 0.8 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
8PSK ANT2 Normal					
DH1	0.380	32	0.122	0.4	-0.278
DH3	1.630	16	0.261	0.4	-0.139
DH5	2.872	13	0.373	0.4	-0.027
8PSK ANT2 AFH					
DH1	0.380	8	0.030	0.4	-0.370
DH3	1.630	4	0.065	0.4	-0.335
DH5	2.872	3.25	0.093	0.4	-0.307


- ANT1

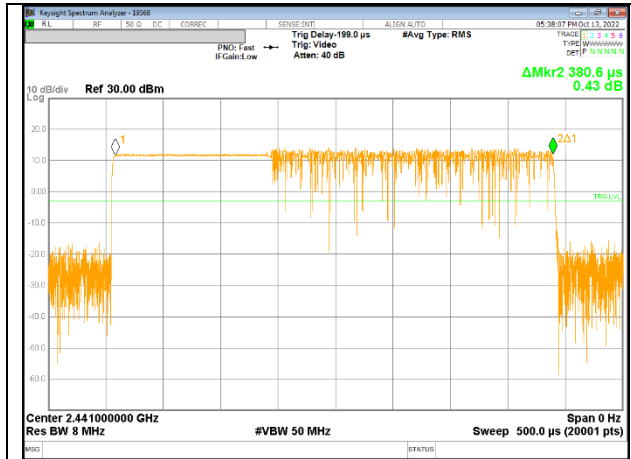


PULSE WIDTH – DH1




NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH1

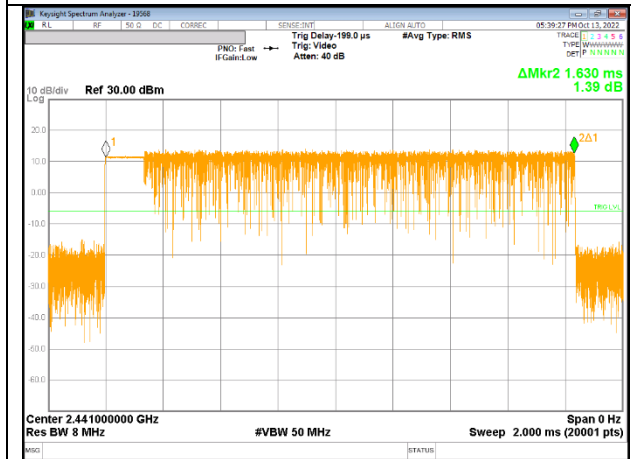


PULSE WIDTH – DH3

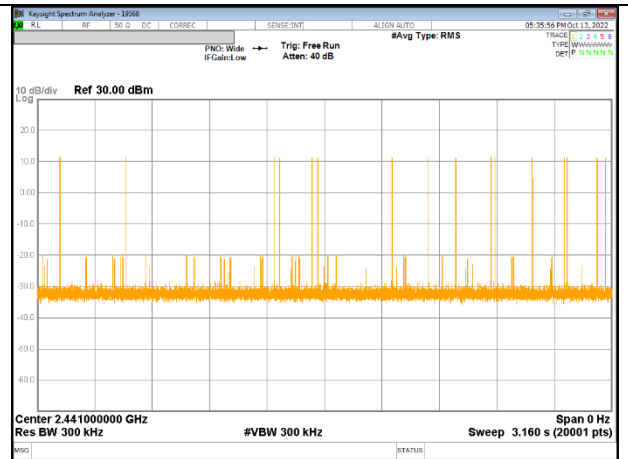

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3

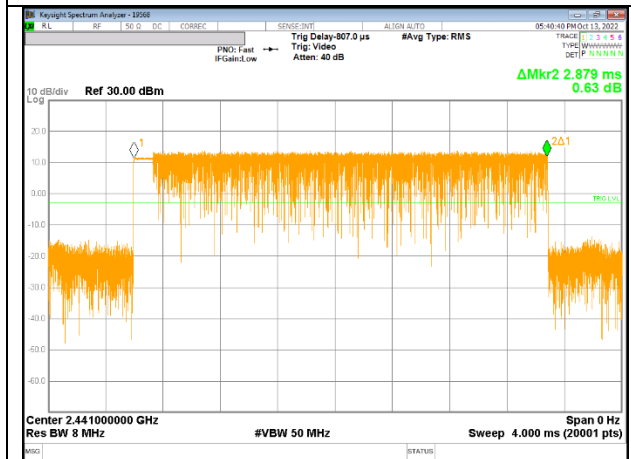


PULSE WIDTH – DH5

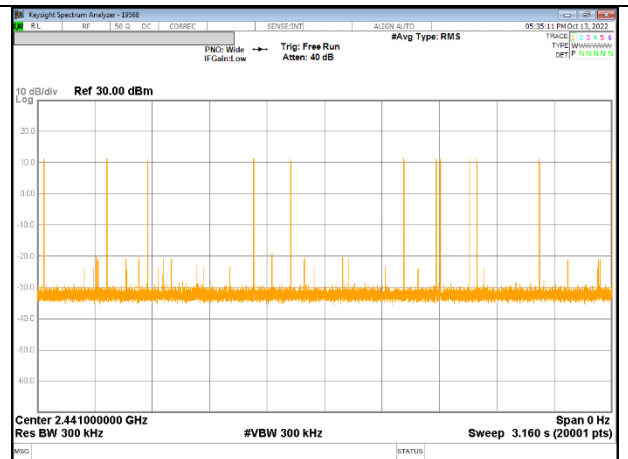


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5


- ANT2

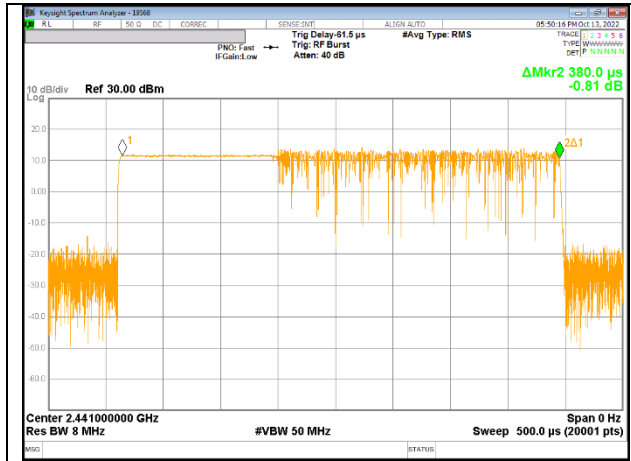


PULSE WIDTH – 3-DH1

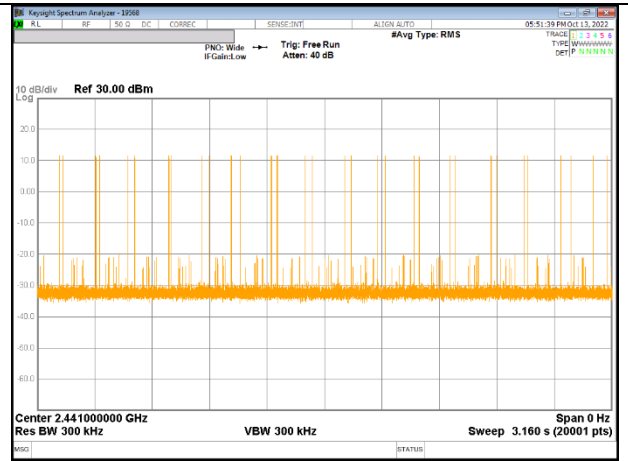


**NUMBER OF PULSES IN 3.16 SECOND
 OBSERVATION PERIOD – 3-DH1**

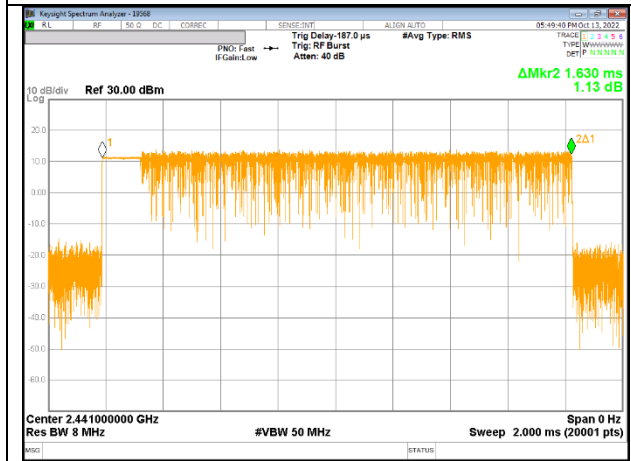


PULSE WIDTH – 3-DH3

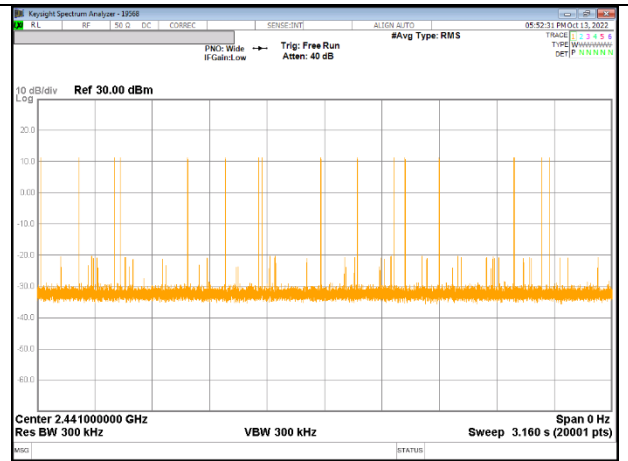

**NUMBER OF PULSES IN 3.16 SECOND
 OBSERVATION PERIOD – 3-DH3**

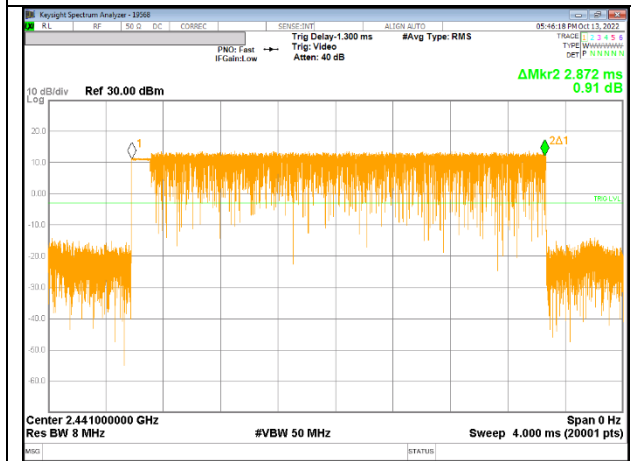

PULSE WIDTH – 3-DH5

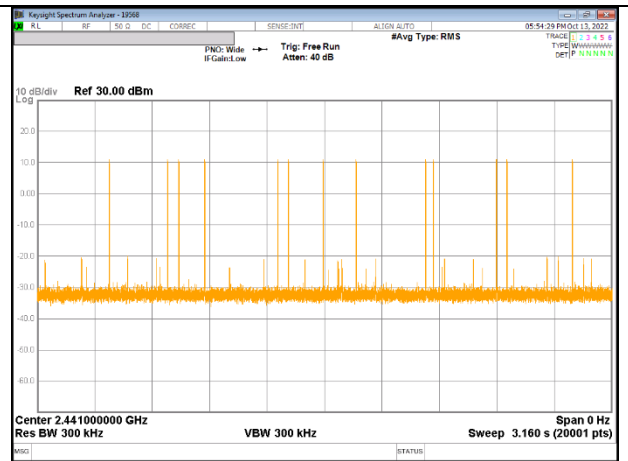

**NUMBER OF PULSES IN 3.16 SECOND
 OBSERVATION PERIOD – 3-DH5**

9.6. OUTPUT POWER

LIMITS

§15.247(b)(1) The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS

9.6.1. BASIC DATA RATE GFSK MODULATION

Antenna	Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
ANT1	0	2402	13.658	21.000	-7.342
	39	2441	14.119		-6.881
	78	2480	13.507		-7.493
ANT2	0	2402	14.475		-6.525
	39	2441	13.157		-7.843
	78	2480	12.067		-8.933
Worst			14.475		-6.525

9.6.2. ENHANCED DATA RATE Pi/4-DPSK MODULATION


Antenna	Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
ANT1	0	2402	12.846	21.000	-8.154
	39	2441	13.334		-7.666
	78	2480	12.683		-8.317
ANT2	0	2402	13.492		-7.508
	39	2441	12.092		-8.908
	78	2480	10.367		-10.633
Worst			13.492		-7.508


9.6.3. ENHANCED DATA RATE 8PSK MODULATION







Antenna	Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
ANT1	0	2402	13.571	21.000	-7.429
	39	2441	13.832		-7.168
	78	2480	13.096		-7.904
ANT2	0	2402	14.013		-6.987
	39	2441	12.662		-8.338
	78	2480	10.930		-10.070
Worst			14.013		-6.987

9.6.4. OUTPUT POWER PLOTS

PEAK OUTPUT POWER

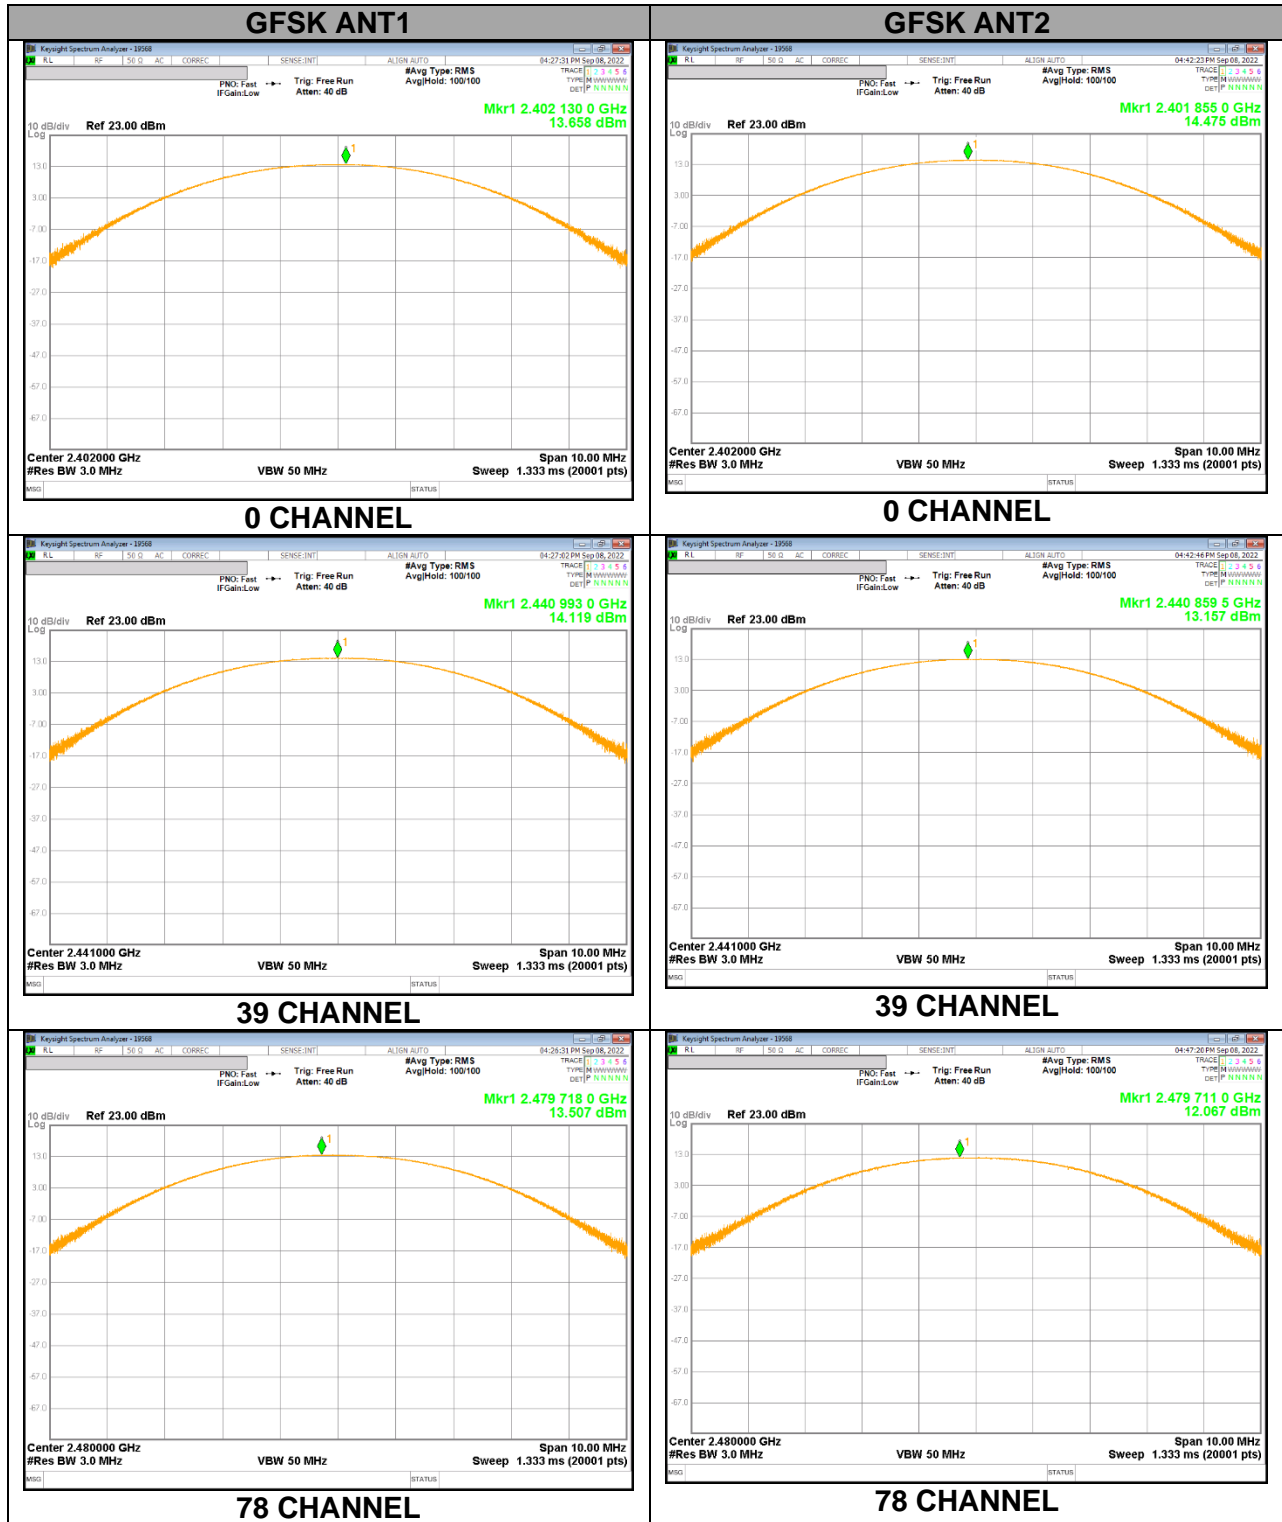

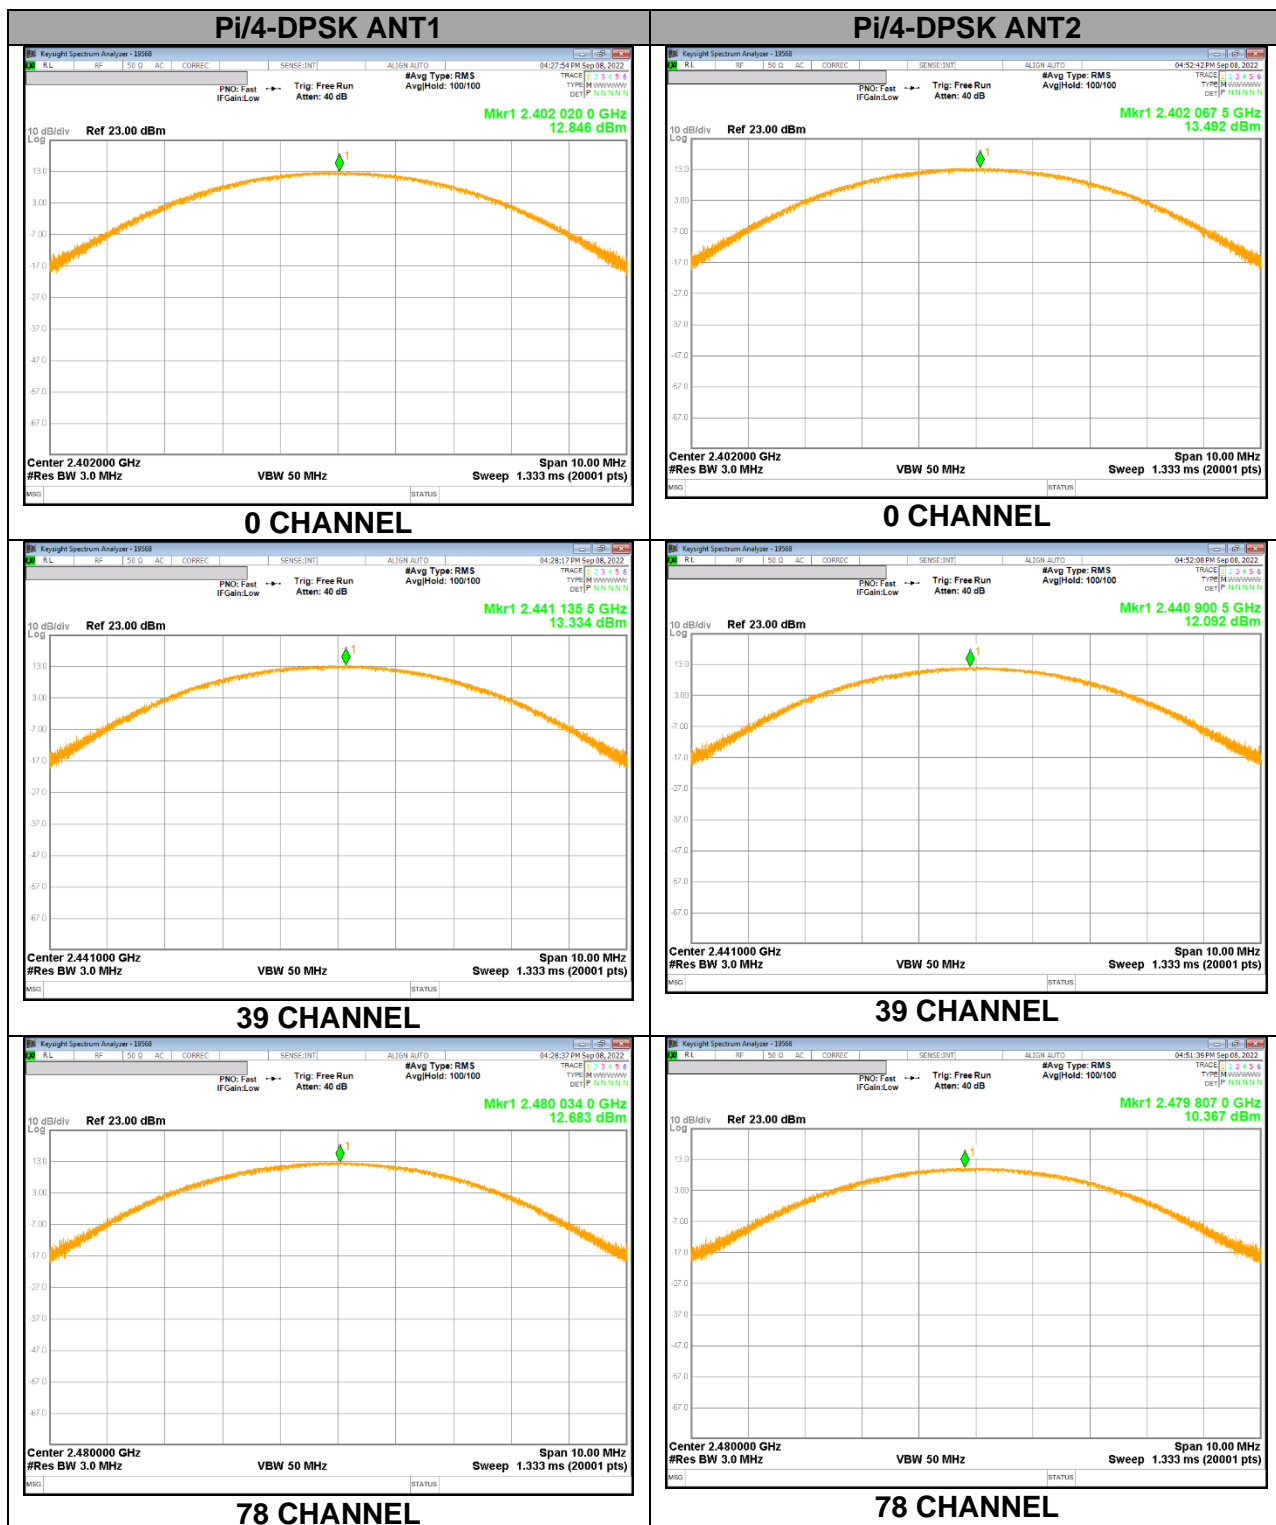

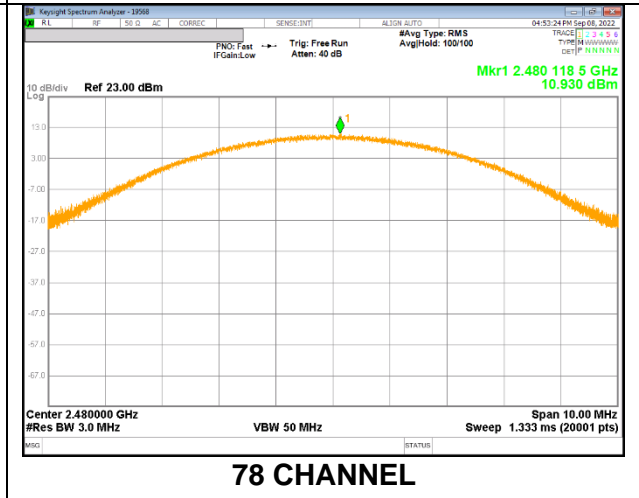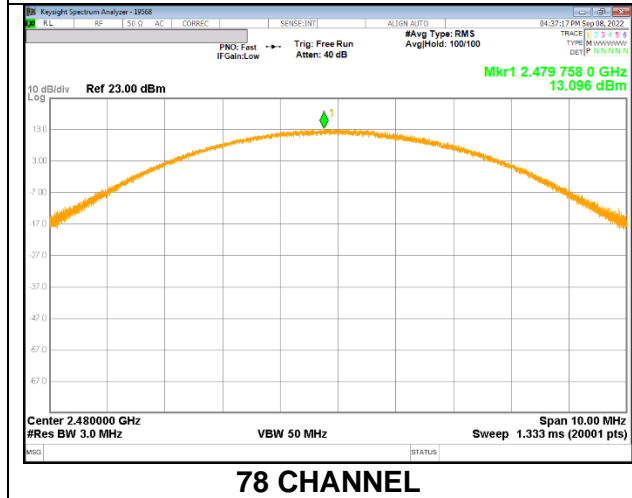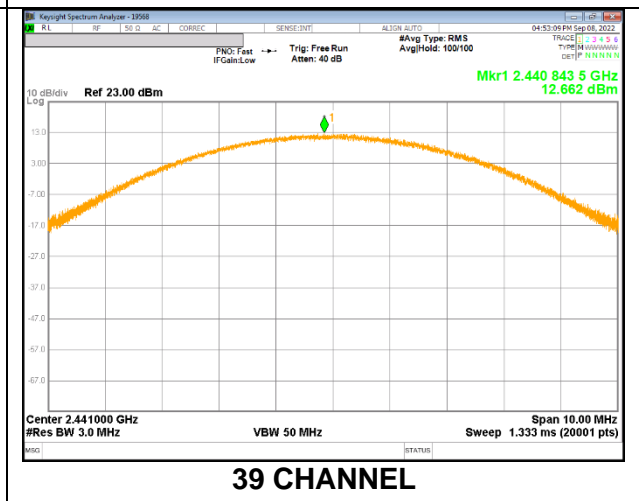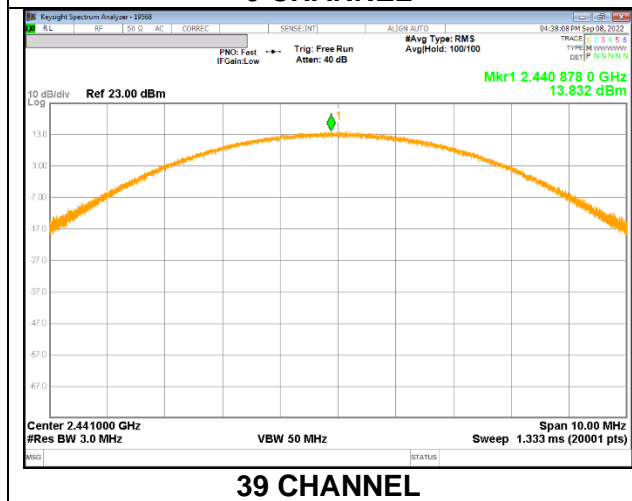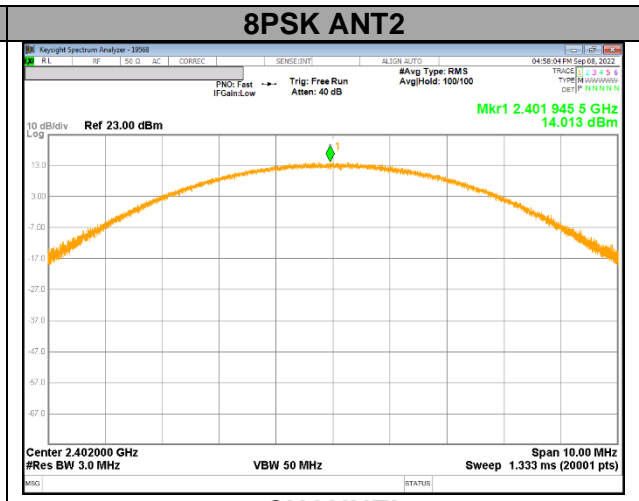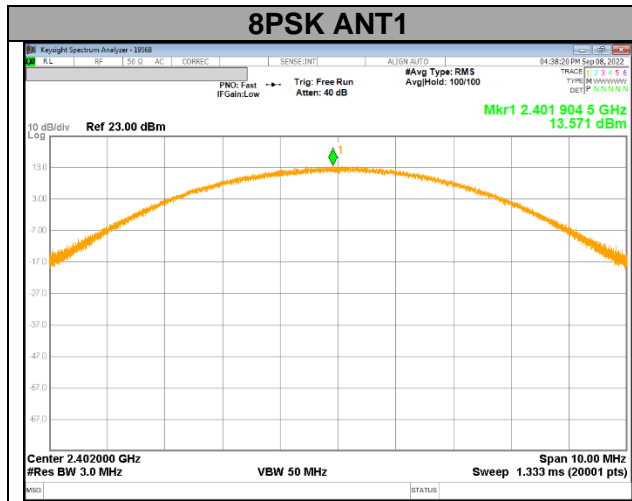

9.7. AVERAGE POWER

LIMITS

None; for reporting purposes only

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

The cable assembly insertion loss was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

9.7.1. BASIC DATA RATE GFSK MODULATION

Antenna	Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
ANT1	0	2402	13.206	20.922
	39	2441	13.687	23.372
	78	2480	13.037	20.123
ANT2	0	2402	13.898	24.536
	39	2441	12.464	17.636
	78	2480	11.073	12.803

9.7.2. ENHANCED DATA RATE PI/4-DQPSK MODULATION

Antenna	Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
ANT1	0	2402	9.636	9.197
	39	2441	10.143	10.335
	78	2480	10.243	10.575
ANT2	0	2402	10.994	12.572
	39	2441	9.636	9.195
	78	2480	7.830	6.068

9.7.3. ENHANCED DATA RATE 8PSK MODULATION

Antenna	Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
ANT1	0	2402	10.384	10.924
	39	2441	10.908	12.325
	78	2480	10.293	10.698
ANT2	0	2402	10.971	12.505
	39	2441	9.634	9.192
	78	2480	7.864	6.114

9.8. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The band-edges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.


RESULTS

9.8.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION


SPURIOUS EMISSIONS, NON-HOPPING - ANT1

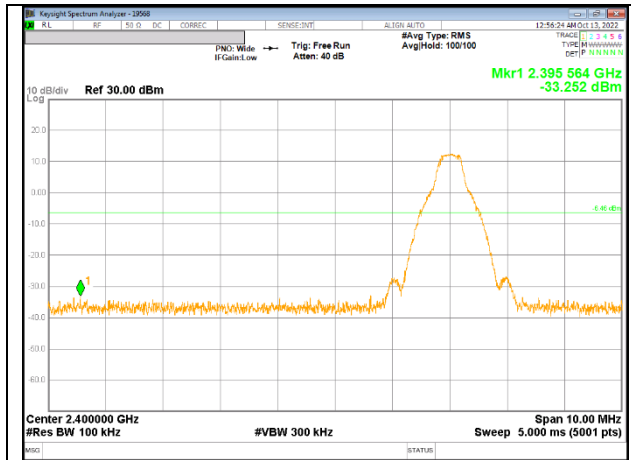


0 CHANNEL BANDEDGE

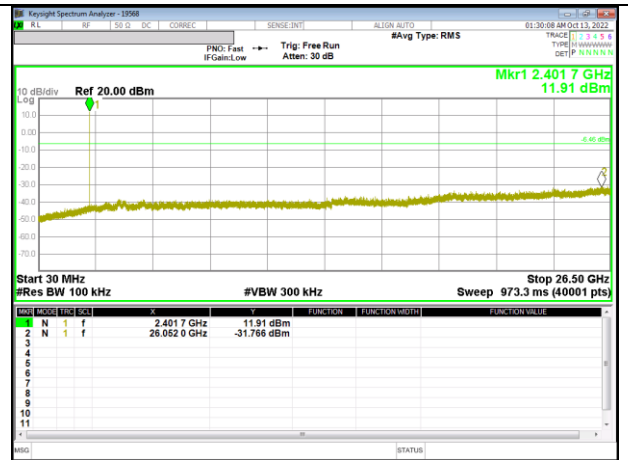


OUT-OF-BAND 0 CHANNEL

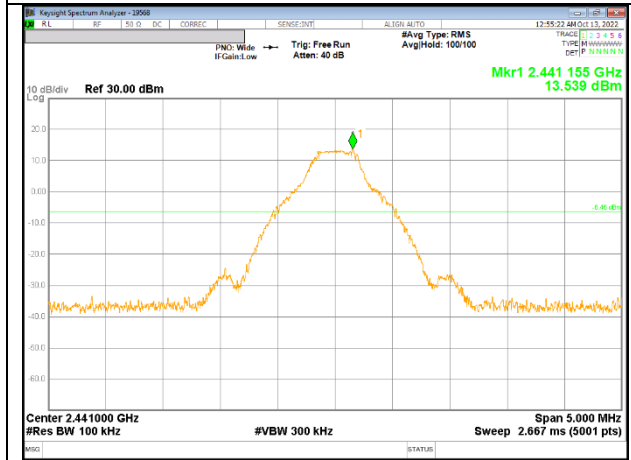


IN-BAND REFERENCE LEVEL

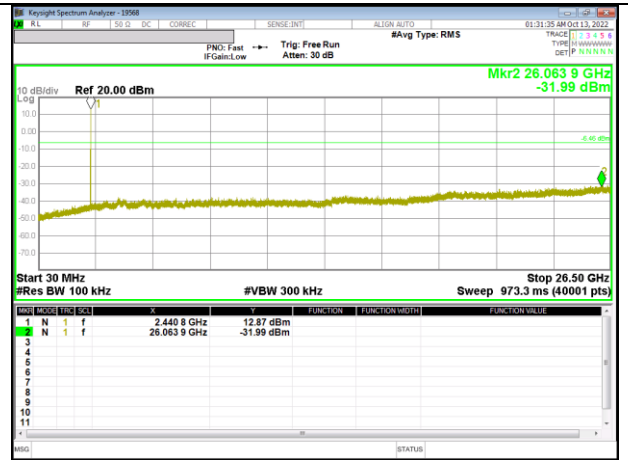

OUT-OF-BAND 39 CHANNEL

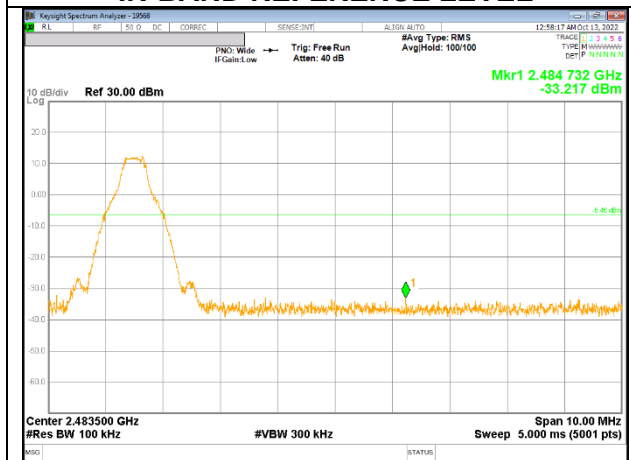


78 CHANNEL BANDEDGE

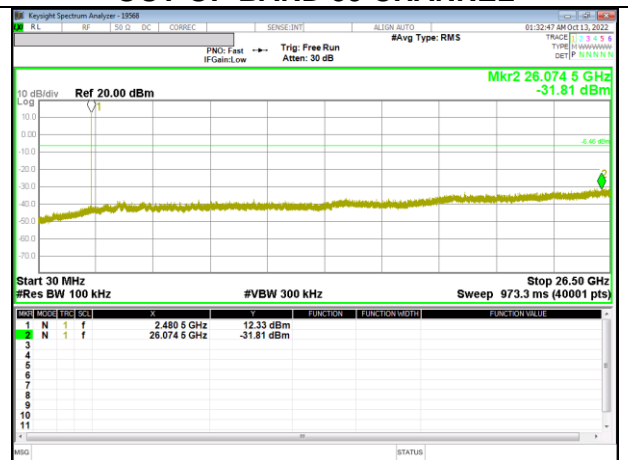


OUT-OF-BAND 78 CHANNEL


SPURIOUS BANDEGE EMISSIONS WITH HOPPING ON

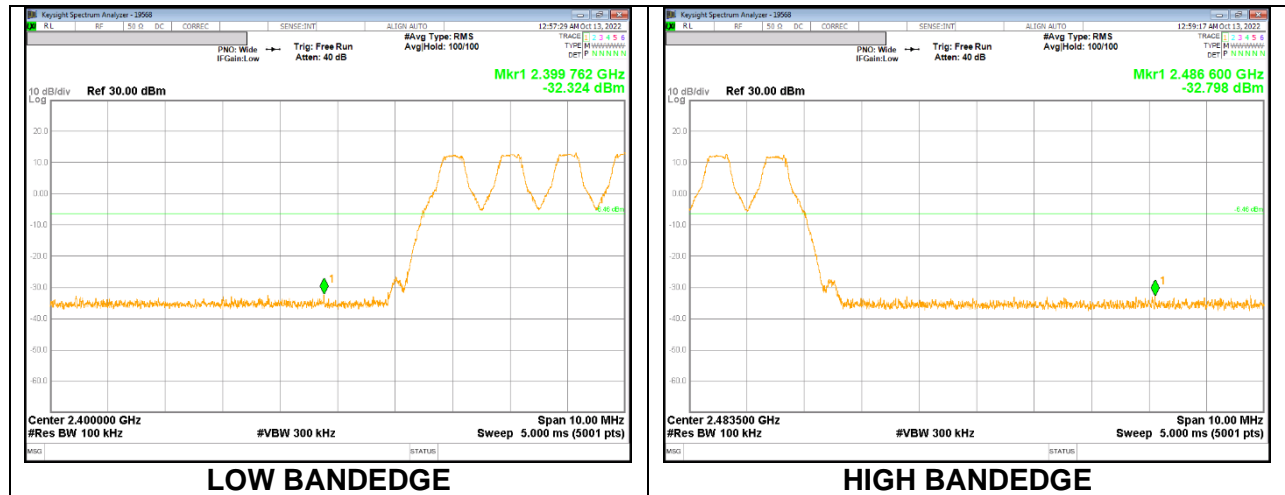


SPURIOUS EMISSIONS, NON-HOPPING - ANT2

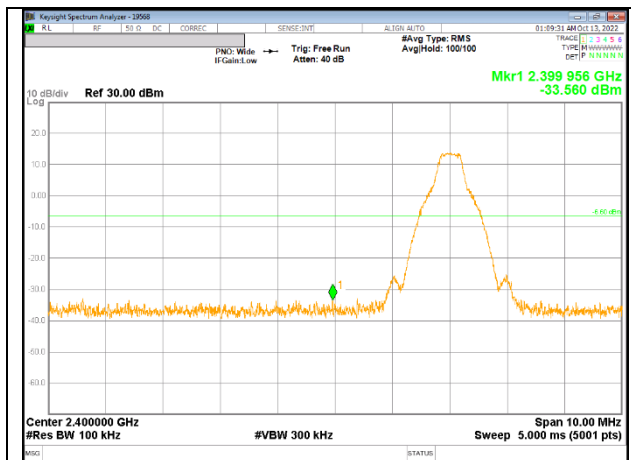


0 CHANNEL BANDEDGE

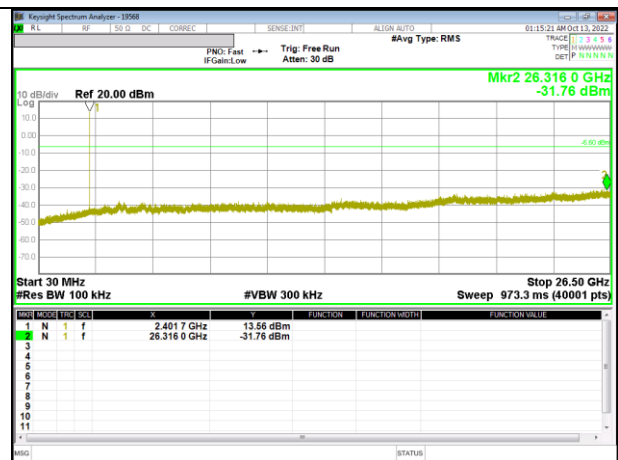


OUT-OF-BAND 0 CHANNEL

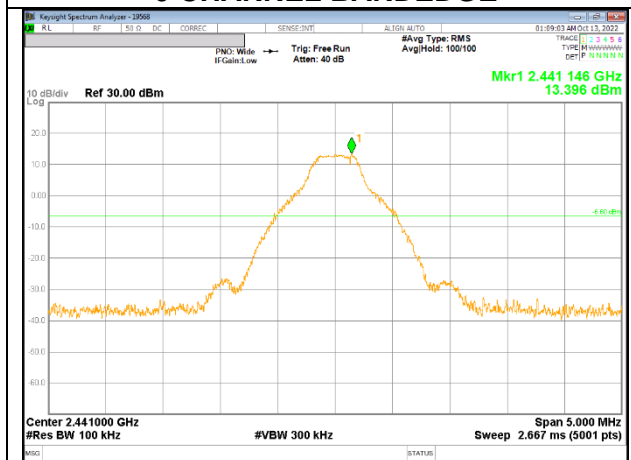


IN-BAND REFERENCE LEVEL

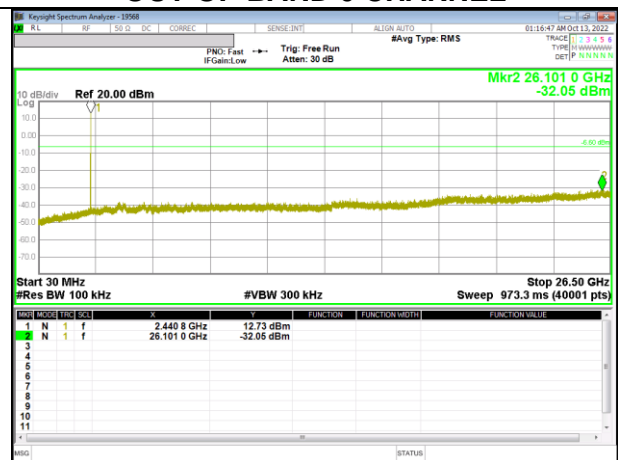

OUT-OF-BAND 39 CHANNEL

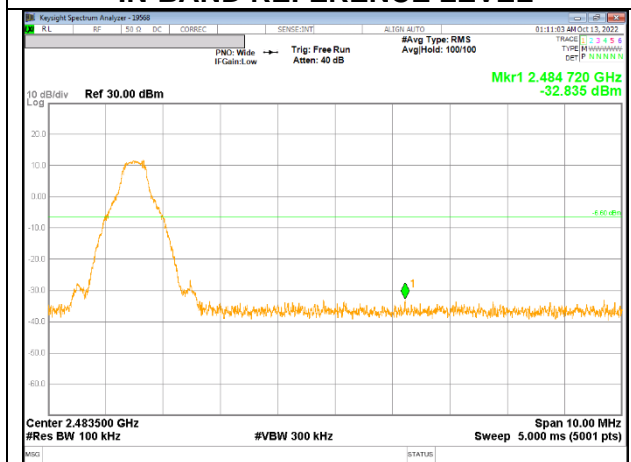


78 CHANNEL BANDEDGE

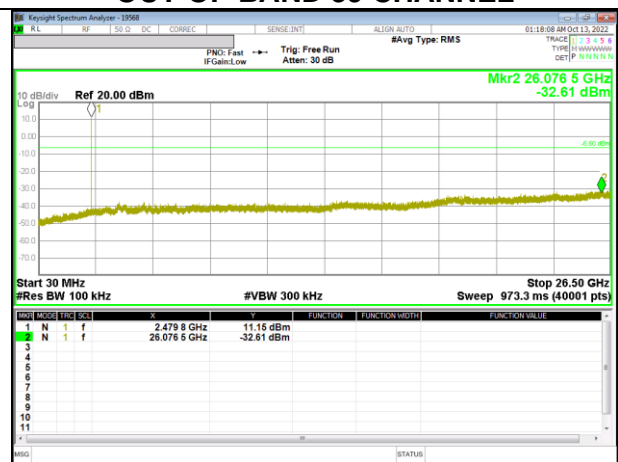


OUT-OF-BAND 78 CHANNEL

SPURIOUS BANDEGE EMISSIONS WITH HOPPING ON

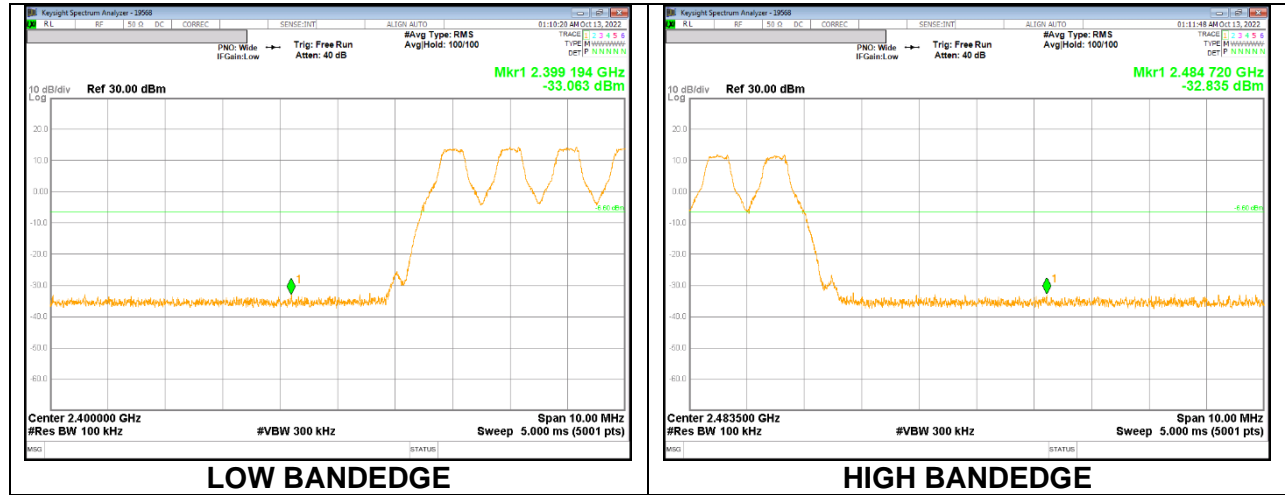


9.8.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION


SPURIOUS EMISSIONS, NON-HOPPING - ANT1

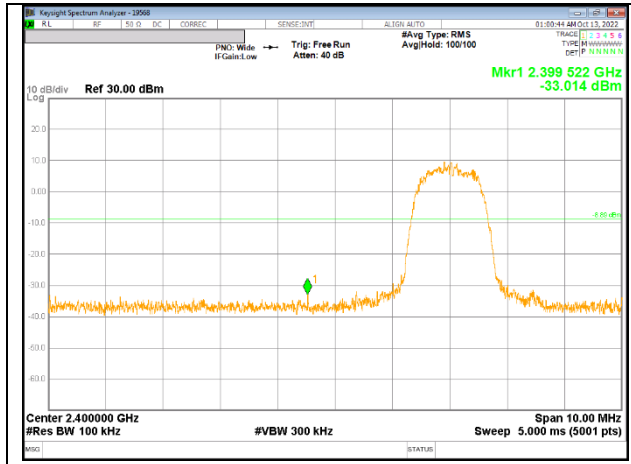


0 CHANNEL BANDEDGE

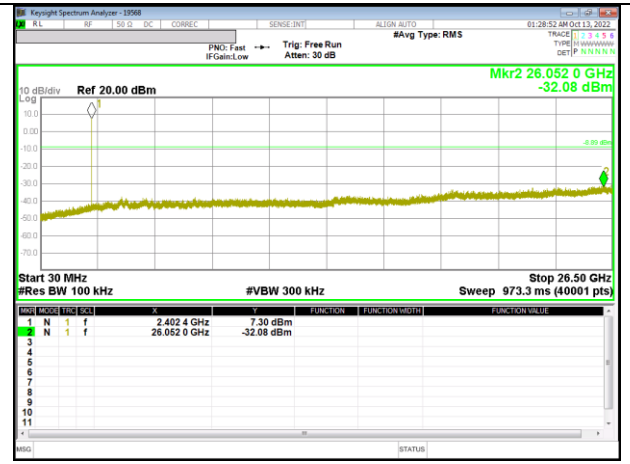


OUT-OF-BAND 0 CHANNEL

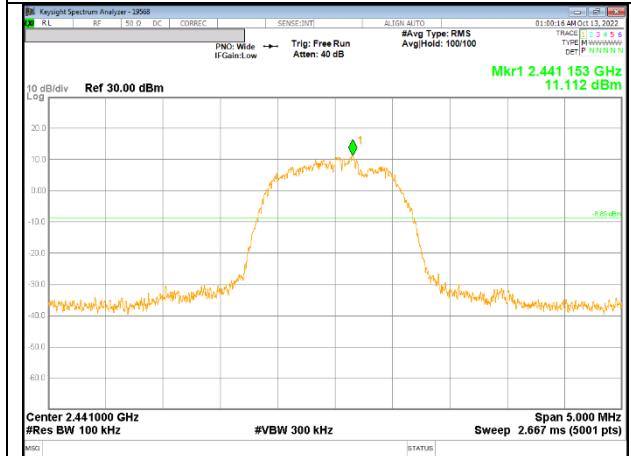


IN-BAND REFERENCE LEVEL

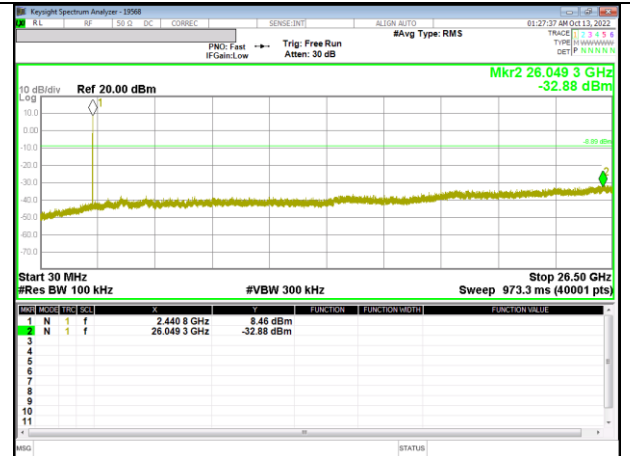

OUT-OF-BAND 39 CHANNEL

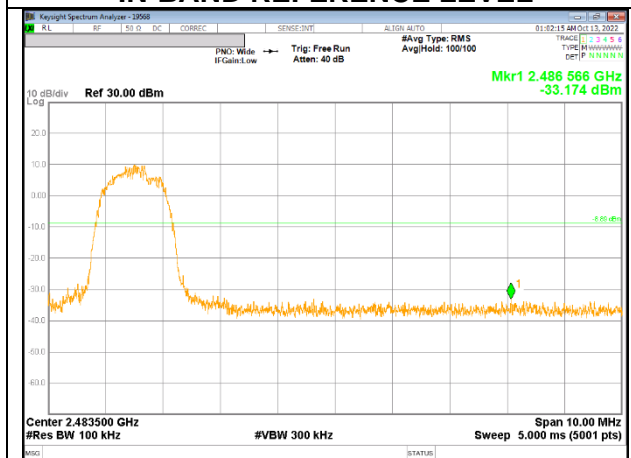


78 CHANNEL BANDEDGE

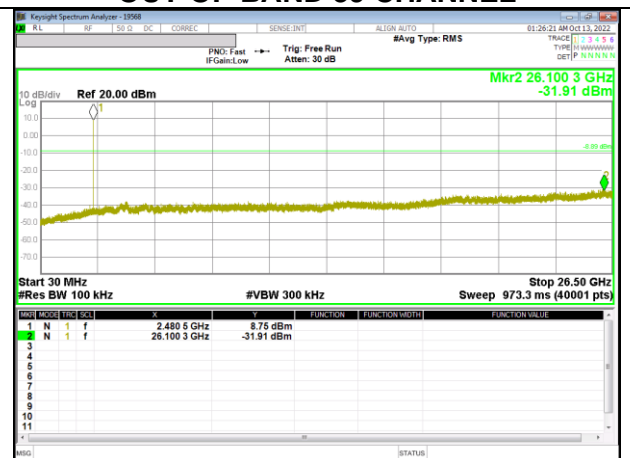


OUT-OF-BAND 78 CHANNEL


SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

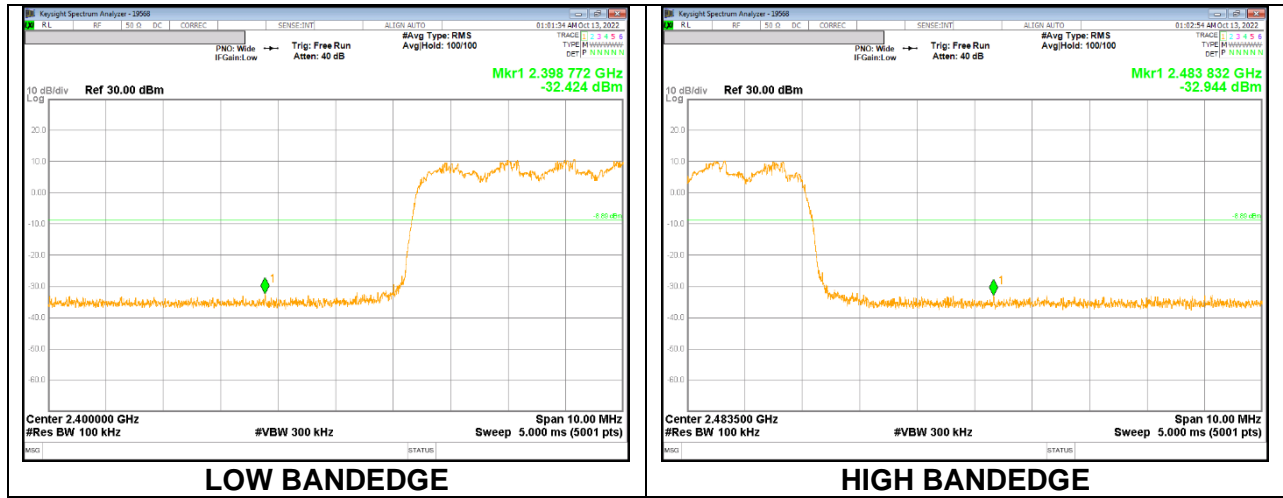


SPURIOUS EMISSIONS, NON-HOPPING - ANT2

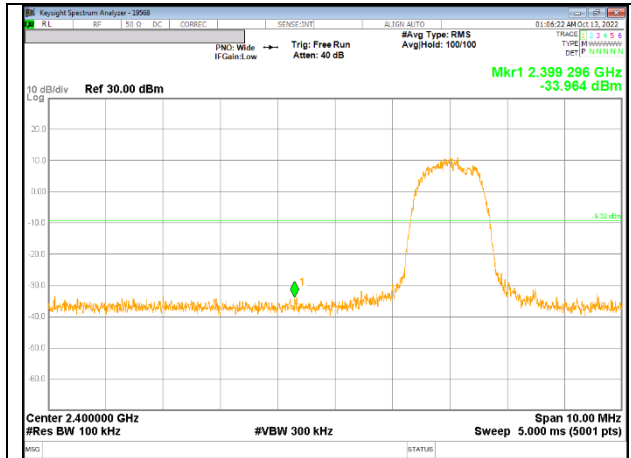


0 CHANNEL BANDEDGE

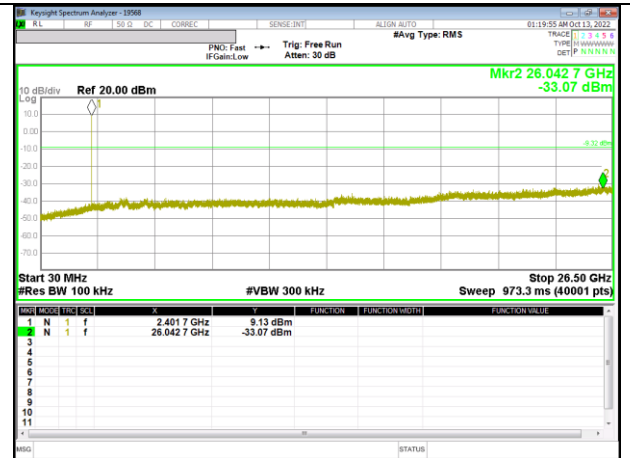


OUT-OF-BAND 0 CHANNEL

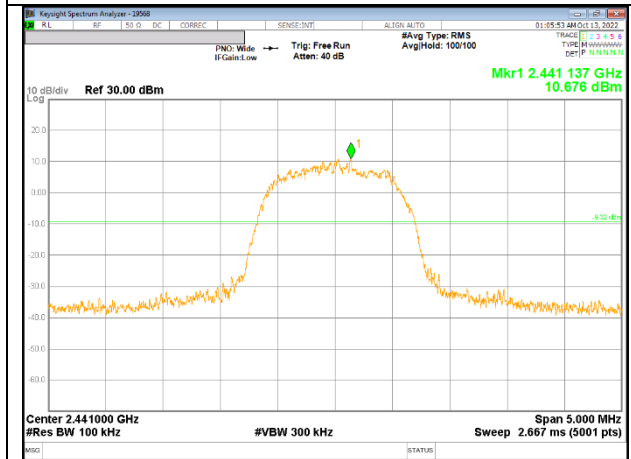


IN-BAND REFERENCE LEVEL

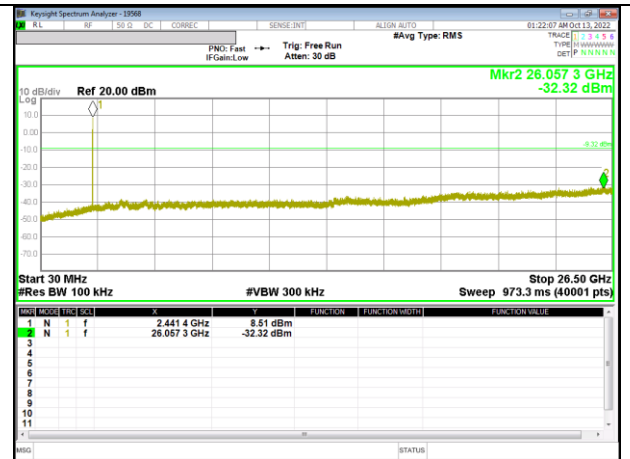

OUT-OF-BAND 39 CHANNEL

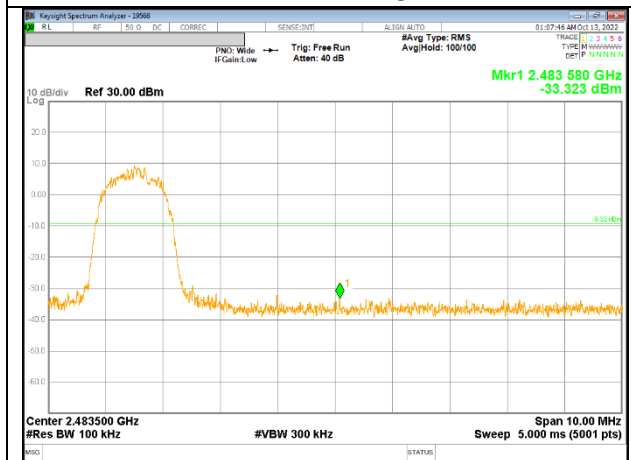

78 CHANNEL BANDEDGE

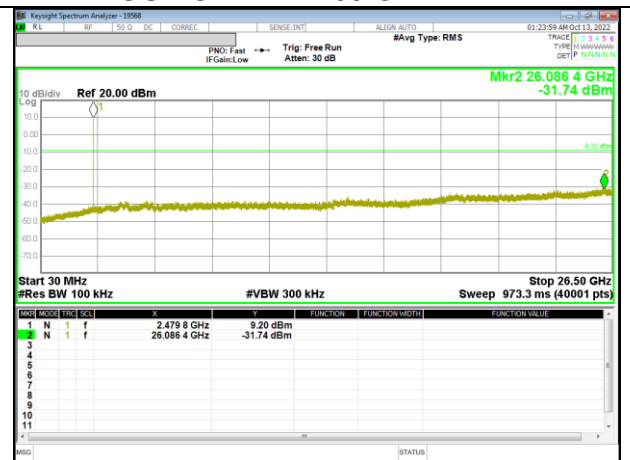

OUT-OF-BAND 78 CHANNEL